



## Measurement of RF Emissions from a Bodypack Transmitter Model No. ULXD1

---

|                    |   |
|--------------------|---|
| For                | Shure Incorporated<br>5800 West Touhy Avenue<br>Niles, IL 60714   |
| P.O. Number        | 4500275203  |
| Date Tested        | September 2, 2014 through September 12, 2014  |
| Test Personnel     | Mark Longinotti   |
| Test Specification | FCC "Code of Federal Regulations" Title 47<br>Part15, Subpart C, Section 15.249<br>Industry Canada RSS-GEN<br>Industry Canada RSS-210 |

Test Report By:

*Mark E. Longinotti*

Mark Longinotti  
EMC Engineer

Requested By:

Alex Stelmaszczyk  
Shure Incorporated

Approved By:

*Raymond J. Klouda*

Raymond J. Klouda  
Registered Professional  
Engineer of Illinois - 44894

## TABLE OF CONTENTS

| PARAGRAPH                                      | DESCRIPTION OF CONTENTS | PAGE NO. |
|--|-------------------------|----------|
| 1. Introduction.....                           |                         | 4        |
| 1.1. Scope of Tests.....                       |                         | 4        |
| 1.2. Purpose .....                             |                         | 4        |
| 1.3. Deviations, Additions and Exclusions..... |                         | 4        |
| 1.4. EMC Laboratory Identification .....       |                         | 4        |
| 1.5. Laboratory Conditions.....                |                         | 4        |
| 2. Applicable Documents.....                   |                         | 4        |
| 3. EUT Setup and Operation.....                |                         | 5        |
| 3.1. General Description .....                 |                         | 5        |
| 3.1.1. Power Input.....                        |                         | 5        |
| 3.1.2. Peripheral Equipment .....              |                         | 5        |
| 3.1.3. Signal Input/Output Leads .....         |                         | 5        |
| 3.1.4. Grounding .....                         |                         | 5        |
| 3.2. Software.....                             |                         | 5        |
| 3.3. Operational Mode .....                    |                         | 5        |
| 3.4. EUT Modifications.....                    |                         | 5        |
| 4. Test Facility and Test Instrumentation..... |                         | 5        |
| 4.1. Shielded Enclosure.....                   |                         | 5        |
| 4.2. Test Instrumentation.....                 |                         | 5        |
| 4.3. Calibration Traceability .....            |                         | 5        |
| 4.4. Measurement Uncertainty .....             |                         | 6        |
| 5. Test Procedures .....                       |                         | 6        |
| 5.1. Powerline Conducted Emissions.....        |                         | 6        |
| 5.1.1. Requirements.....                       |                         | 6        |
| 5.2. Radiated Measurements .....               |                         | 6        |
| 5.2.1. Requirements.....                       |                         | 6        |
| 5.2.2. Procedures.....                         |                         | 6        |
| 5.2.3. Results .....                           |                         | 7        |
| 5.3. Occupied Bandwidth Measurements.....      |                         | 7        |
| 5.3.1. Requirement.....                        |                         | 7        |
| 5.3.2. Procedures.....                         |                         | 7        |
| 5.3.3. Results .....                           |                         | 7        |
| 6. Other Test Conditions .....                 |                         | 8        |
| 6.1. Test Personnel and Witnesses.....         |                         | 8        |
| 6.2. Disposition of the EUT .....              |                         | 8        |
| 7. Conclusions.....                            |                         | 8        |
| 8. Certification.....                          |                         | 8        |
| 9. Equipment List.....                         |                         | 9        |

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE  
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

### REVISION HISTORY

| Revision | Date           | Description     |
|----------|----------------|-----------------|
| —        | 1 October 2014 | Initial release |
|          |                |                 |

## Measurement of RF Emissions from a Bodypack Transmitter, Model No. ULXD1

### 1. INTRODUCTION

#### 1.1. Scope of Tests

This report presents the results of the RF emissions measurements performed on a Shure Incorporated Bodypack Transmitter, Model No. ULXD1, Serial No. None Assigned, (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was designed to transmit in the 902-928MHz band using an external, removable whip antenna. The EUT was manufactured and submitted for testing by Shure Incorporated located in Niles, IL.

#### 1.2. Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.249 for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-2009.

The test series was also performed to determine if the EUT meets the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.4 and RSS-210 Annex 2, section A2.9 for transmitters. Testing was performed in accordance with ANSI C63.4-2009.

#### 1.3. Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

#### 1.4. EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by The American Association for Laboratory Accreditation (A2LA). A2LA Certificate Number: 1786.01.

#### 1.5. Laboratory Conditions

The temperature at the time of the test was 21°C and the relative humidity was 35%.

### 2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2013
- ANSI C63.4-2009, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada Radio Standards Specification, RSS-Gen, "General Requirements and Information for the Certification of Radiocommunication Equipment", Issue 3, December 2010
- Industry Canada Radio Standards Specification, RSS-210, "Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment", Issue 8, December 2010

### 3. EUT SETUP AND OPERATION

#### 3.1. General Description

The EUT is a Shure Incorporated, Bodypack Transmitter, Model No. ULXD1. A block diagram of the EUT setup is shown as Figure 1.

##### 3.1.1. Power Input

The EUT was powered with 3VDC from 2 each internal "AA" batteries.

##### 3.1.2. Peripheral Equipment

The microphone port of the EUT was terminated with a Shure WL183 Lavalier Condenser Microphone.

##### 3.1.3. Signal Input/Output Leads

The Shure WL183 Lavalier Condenser Microphone was connected to the microphone port of the EUT via a 1.2 meter long, 4 conductor cable.

##### 3.1.4. Grounding

The EUT was not grounded during testing.

#### 3.2. Software

For all tests the EUT had Firmware Version X52 1.5.14 loaded onto the device to provide correct load characteristics.

#### 3.3. Operational Mode

All emissions tests were performed separately in the following modes:

- Transmit at 902.4MHz, High Density (HD) Mode
- Transmit at 915MHz, High Density (HD) Mode
- Transmit at 927.6MHz, High Density (HD) Mode

#### 3.4. EUT Modifications

No modifications were required for compliance.

### 4. TEST FACILITY AND TEST INSTRUMENTATION

#### 4.1. Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

#### 4.2. Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Conducted and radiated emission measurements were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths and detector functions specified in the requirements.

#### 4.3. Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

#### 4.4. Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

| Conducted Emissions Measurements      |      |       |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty         | 1.06 | -1.06 |
| Expanded Uncertainty (95% confidence) | 2.12 | -2.12 |

| Radiated Emissions Measurements       |      |       |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty         | 2.09 | -2.09 |
| Expanded Uncertainty (95% confidence) | 4.19 | -4.19 |

### 5. TEST PROCEDURES

#### 5.1. Powerline Conducted Emissions

##### 5.1.1. Requirements

Since the EUT was powered by internal batteries and has no connection to AC power, the conducted emission tests are not required.

#### 5.2. Radiated Measurements

##### 5.2.1. Requirements

The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.249(a) and Industry Canada Radio Standards Specification RSS-210 Annex 2, section A2.9 for transmitters:

| Fundamental Frequency<br>MHz | Field Intensity<br>mV/m @ 3 meter | Field Strength of Harmonics<br>uV/m @ 3 meter |
|------------------------------|-----------------------------------|---|
| 902 - 928                    | 50                                | 500   |

**Note:** The limits shown in the above table are based on measurements using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using a CISPR quasi-peak detector. In addition, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20 dB under any condition of modulation. Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation.

##### 5.2.2. Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to 10GHz. Between 30MHz and 1000MHz, a bilog antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

#### 5.2.3. Results

The preliminary plots, with the EUT transmitting at 902.4MHz, 915MHz, and 927.6MHz, are presented on data pages 13 through 24. The plots are presented for a reference only, and are not used to determine compliance.

Final radiated emissions levels are presented on data pages 25 through 30. As can be seen from the data, all emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 902.4MHz. The emissions level at this frequency was 1.5dB within the limit. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 2 and Figures 3.

### 5.3. Occupied Bandwidth Measurements

#### 5.3.1. Requirement

In accordance with paragraph of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.249(d) and Industry Canada Radio Standards Specification RSS-210 Annex 2, section A2.9(b), emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits, whichever is less stringent.

#### 5.3.2. Procedures

The EUT was placed on an 80cm high non-conductive stand. A bilog antenna was placed at a test distance of 3 meters from the EUT. The unit was set to transmit continuously at the channel closest to the low band-edge. The EUT was maximized for worst case emissions at the low band-edge. The maximum meter reading was recorded using a quasi-peak (QP) detector with a 120kHz resolution bandwidth.

The unit was then set to transmit continuously at the channel closest to the high band-edge. The EUT was maximized for worst case emissions at the high band-edge. The maximum meter reading was recorded using a quasi-peak (QP) detector with a 120kHz resolution bandwidth.

#### 5.3.3. Results

The occupied bandwidth data are shown on data pages 31 and 32. As can be seen from this data page, the transmitter met the occupied bandwidth requirements. The 99% bandwidth was measured to be 204.4kHz.

## 6. OTHER TEST CONDITIONS

### 6.1. Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated. The test series was partially witnessed by Shure Incorporated personnel.

### 6.2. Disposition of the EUT

The EUT and all associated equipment were returned to Shure Incorporated upon completion of the tests.

## 7. CONCLUSIONS

It was determined that the Shure Incorporated Bodypack Transmitter, Model No. ULXD1, Serial No. None Assigned, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-2009.

It was also determined that the Shure Incorporated Bodypack Transmitter, Model No. ULXD1, Serial No. None Assigned, did fully meet the conducted and radiated emission requirements of the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.4 and RSS-210 Annex 2, section A2.9 for transmitters, when tested per ANSI C63.4-2009.

## 8. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

## 9. EQUIPMENT LIST

**Table 9-1 Equipment List**

| Eq ID | Equipment Description           | Manufacturer    | Model No.                | Serial No.   | Frequency Range | Cal Date   | Due Date   |
|-------|---------------------------------|-----------------|--------------------------|--------------|-----------------|------------|------------|
| APW11 | PREAMPLIFIER                    | PMI             | PE2-35-120-5R0-10-12-SFF | PL11685/1241 | 1GHZ-20GHZ      | 3/11/2014  | 3/11/2015  |
| CDX8  | COMPUTER                        | ELITE           | WORKSTATION              |              |                 | N/A        |            |
| NTA3  | BILOG ANTENNA                   | TESEQ           | 6112D                    | 28040        | 25-1000MHz      | 2/19/2014  | 2/19/2015  |
| NWQ1  | DOUBLE RIDGED WAVEGUIDE ANTENNA | ETS-LINDGREN    | 3117                     | 66655        | 1GHZ-18GHZ      | 3/11/2014  | 3/11/2015  |
| RBA0  | EMI TEST RECEIVER               | ROHDE & SCHWARZ | ESIB26                   | 100145       | 20HZ-26.5GHZ    | 3/7/2014   | 3/7/2015   |
| XPQ3  | HIGH PASS FILTER                | K&L MICROWAVE   | 4IH30-1804/T10000-0      | 4            | 1.8GHZ-10GHZ    | 11/25/2013 | 11/25/2014 |

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.



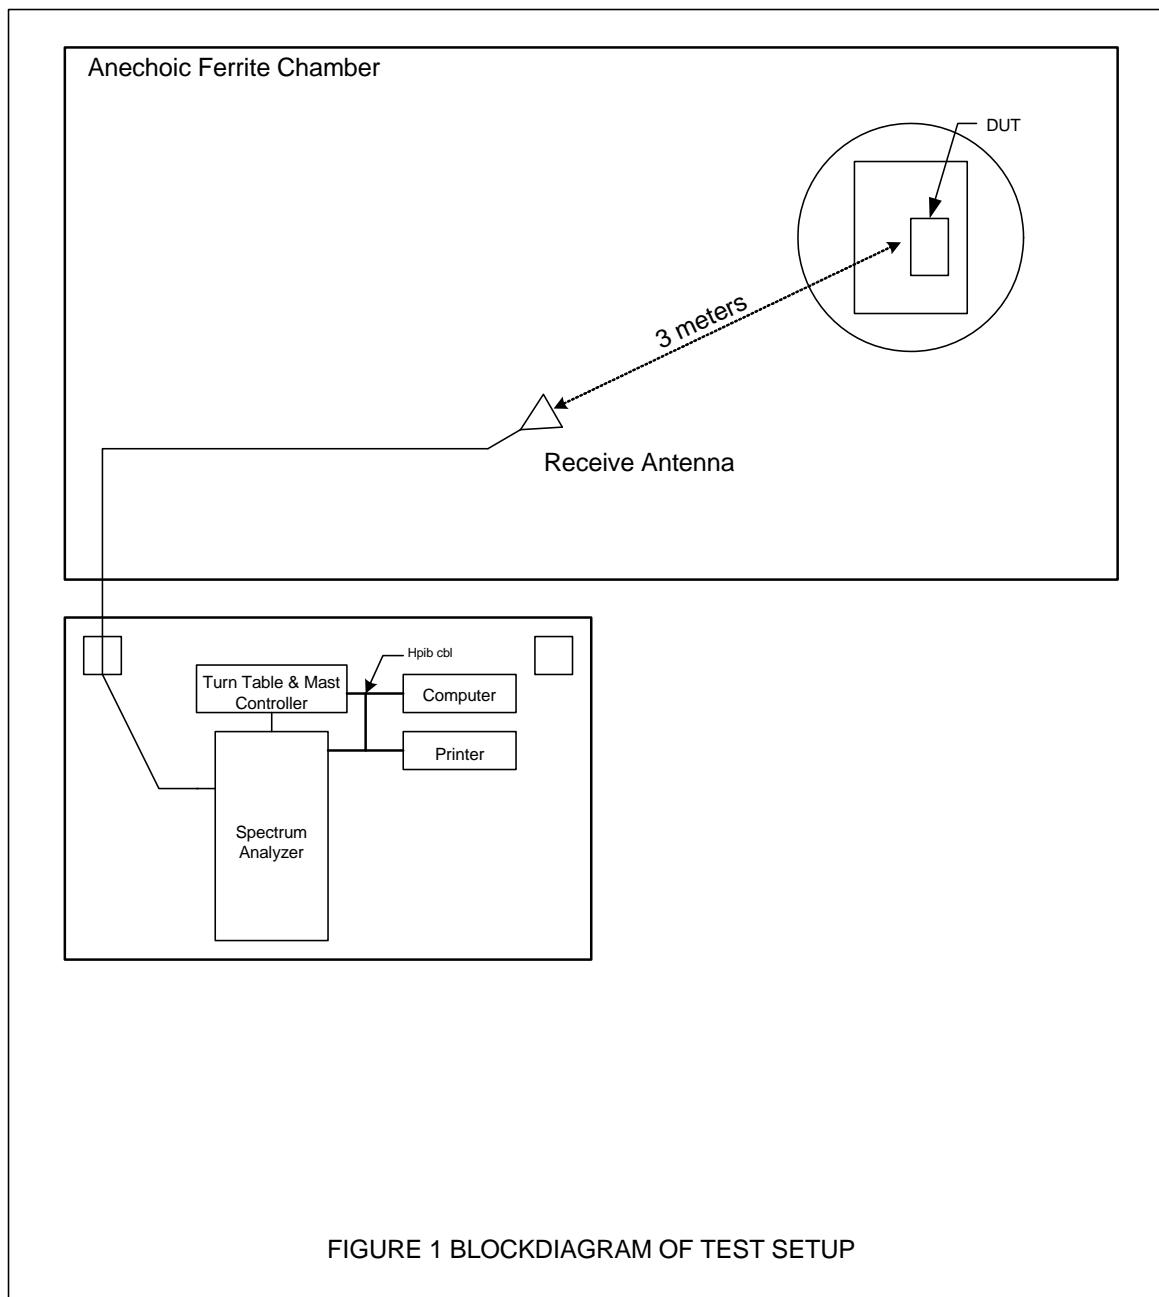


Figure 2

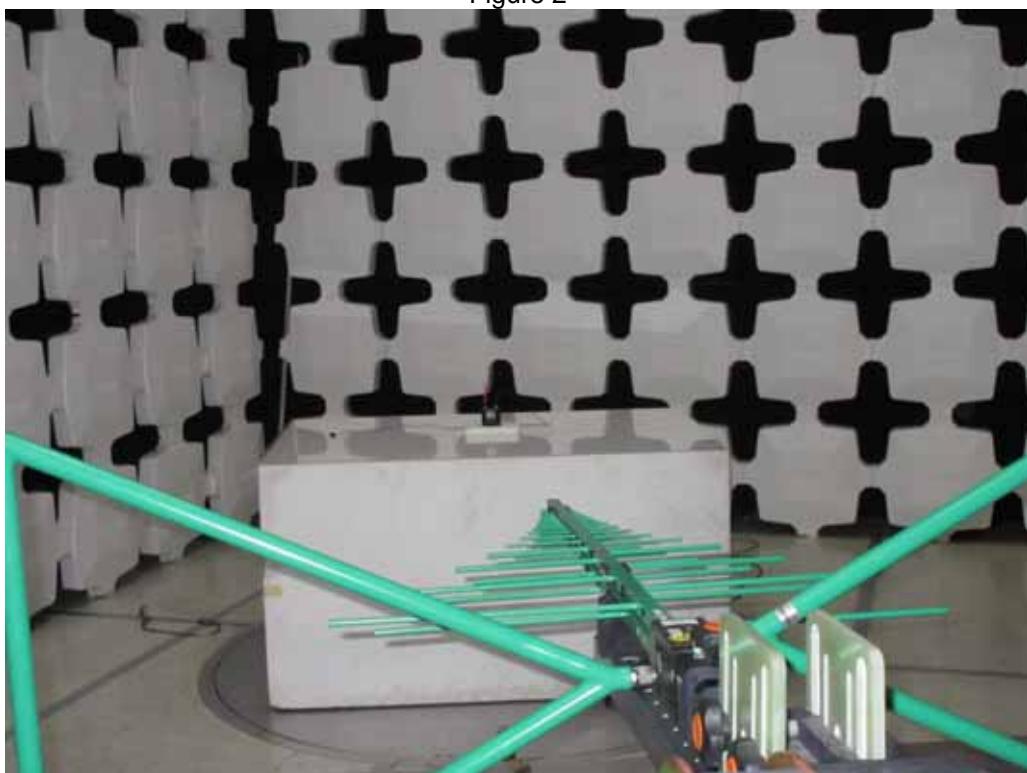

Test Setup for Radiated Emissions, 30MHz to 1GHz – Horizontal Polarization

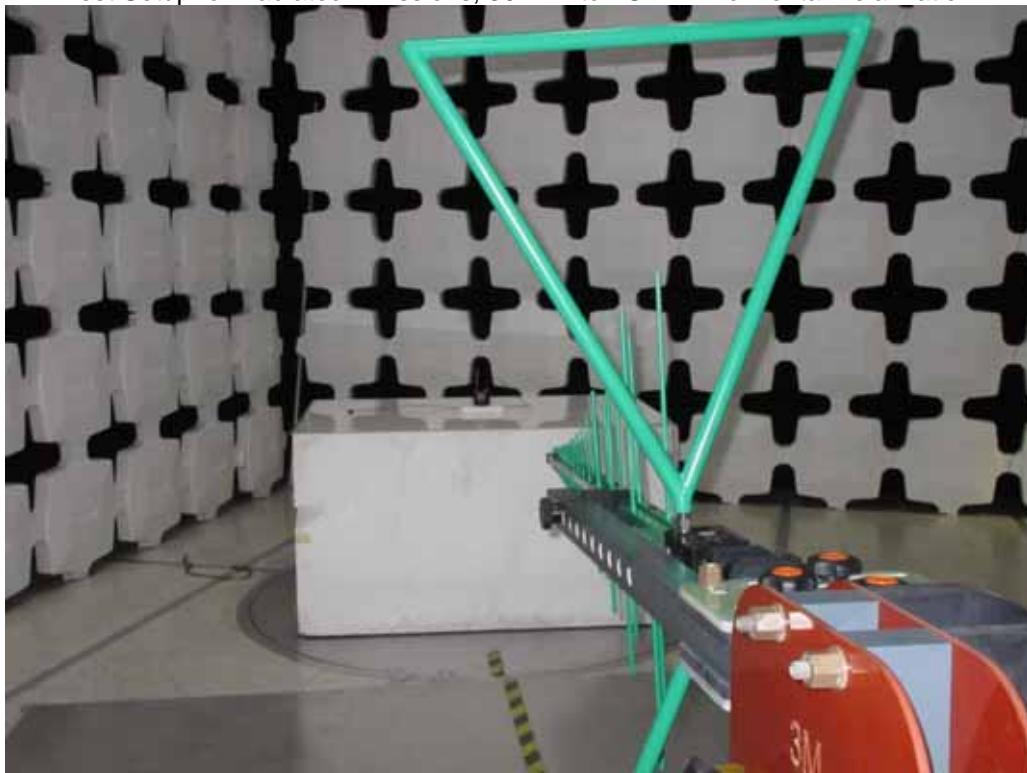


Test Setup for Radiated Emissions, 30MHz to 1GHz – Vertical Polarization

Figure 3



Test Setup for Radiated Emissions, 1GHz to 10GHz – Horizontal Polarization

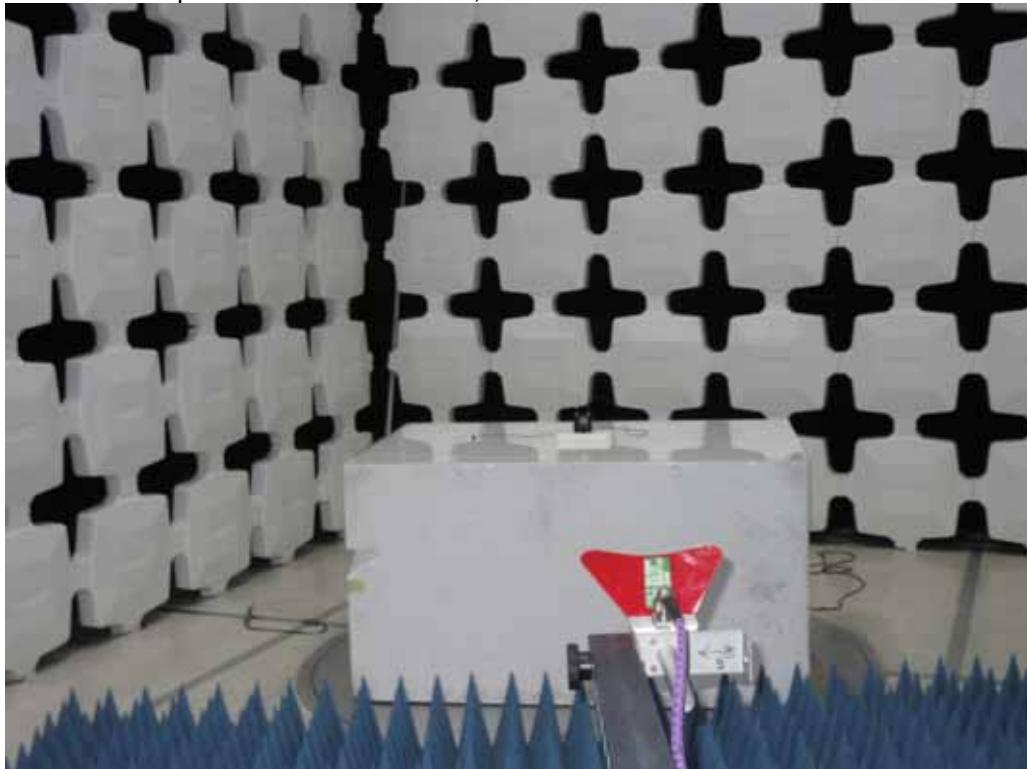


Test Setup for Radiated Emissions, 1GHz to 10GHz – Vertical Polarization

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 18

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. :  
MODE : Tx @ 982.4MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:27:59 M. LONGINOTTI  
ANT. POLARIZ. : HORIZONTAL

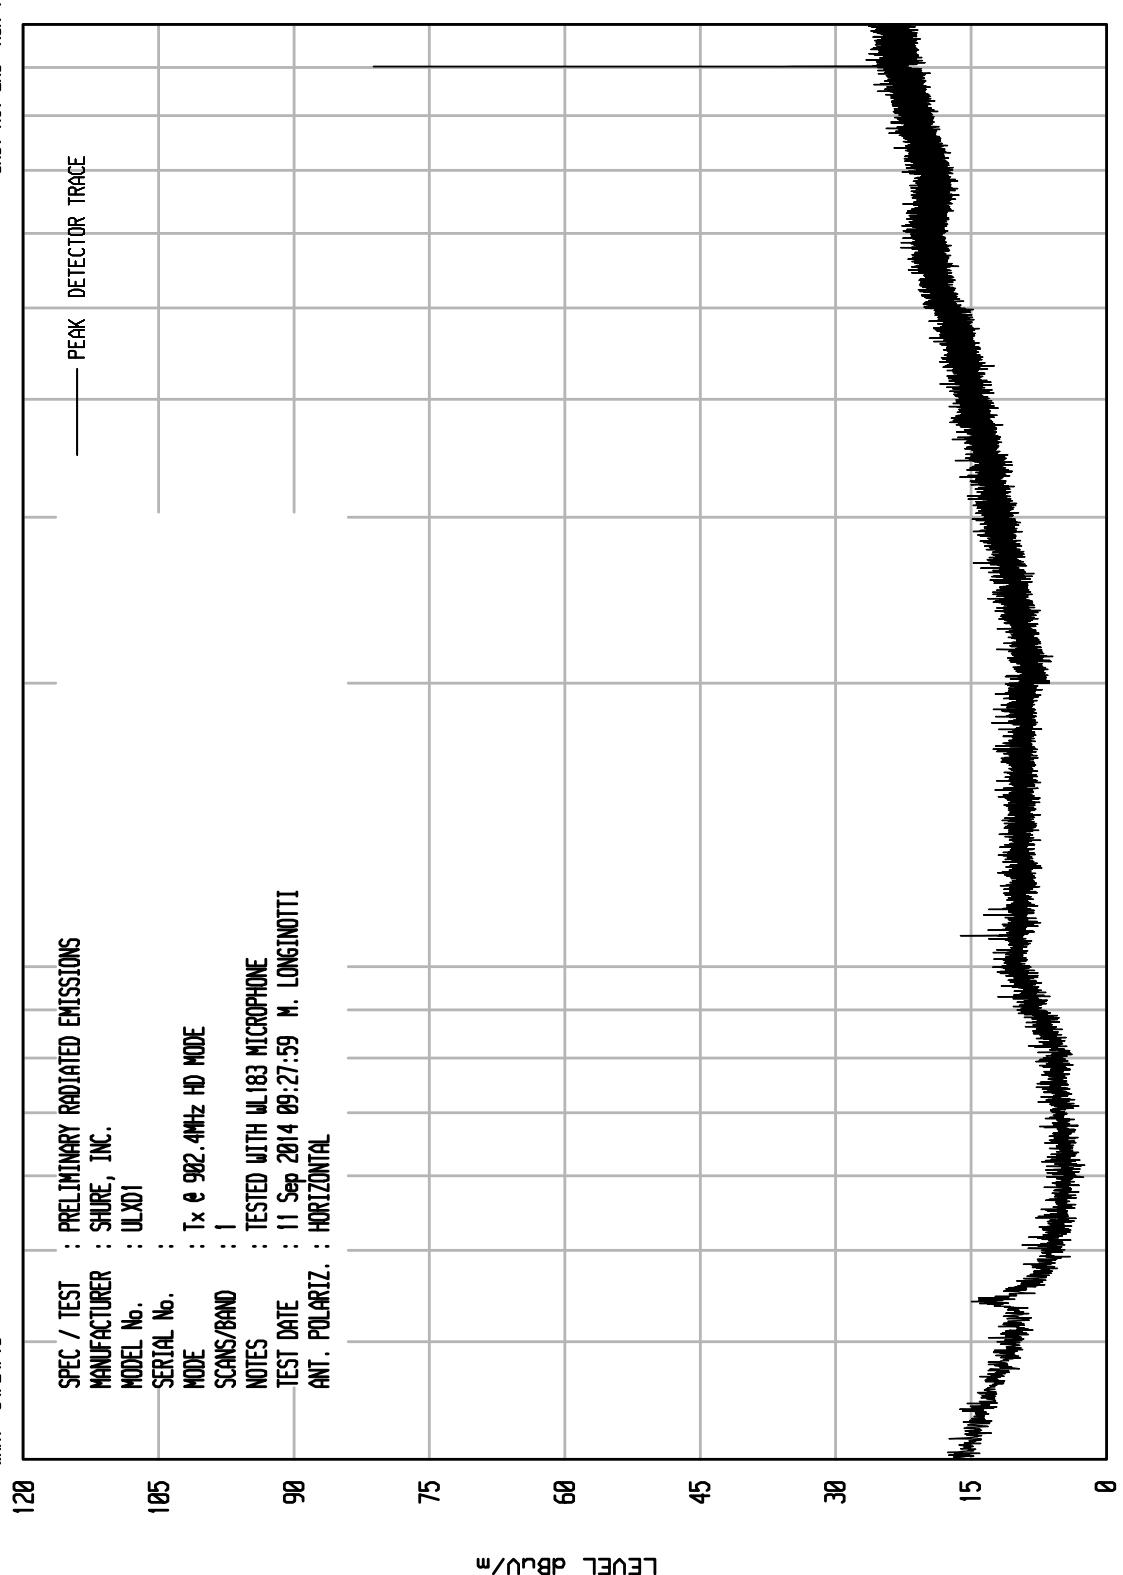


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 17

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. :  
MODE : Tx @ 982.4MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:26:13 M. LONGINOTTI  
ANT. POLARIZ. : VERTICAL

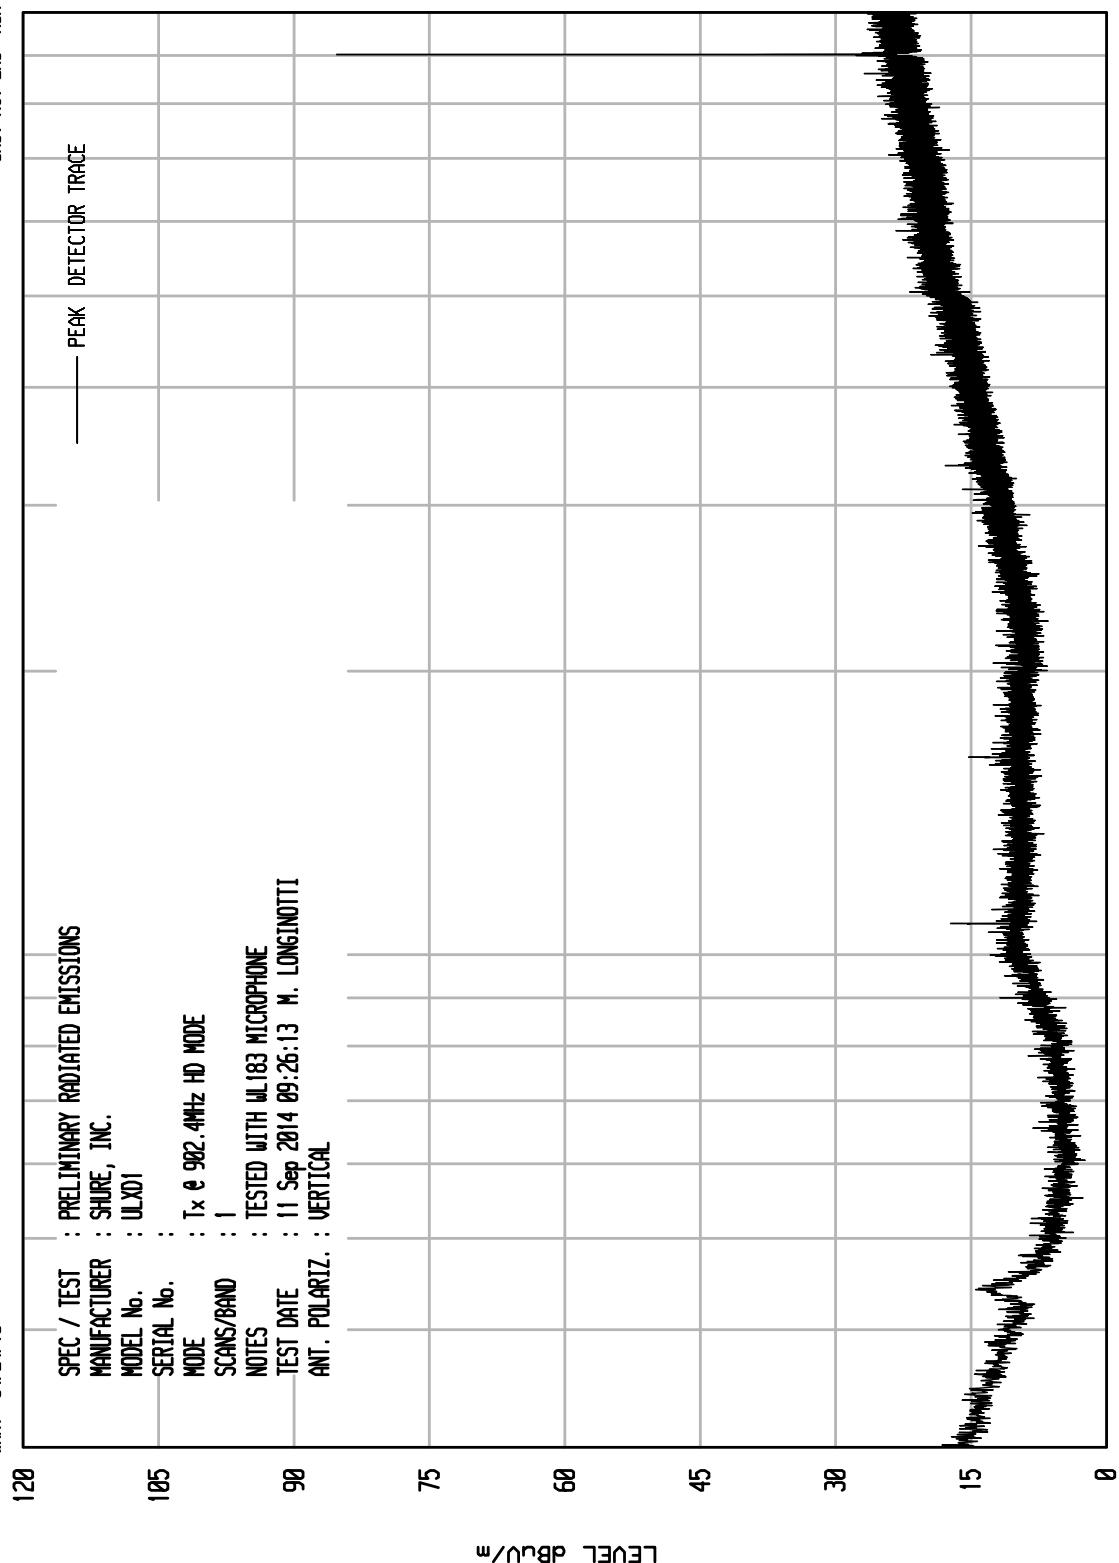

START = 30


STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 27

|               |                                  |
|---------------|----------------------------------|
| SPEC / TEST   | : PRELIMINARY RADIATED EMISSIONS |
| MANUFACTURER  | : SHURE, INC.                    |
| MODEL No.     | : ULAD1                          |
| SERIAL No.    | : 105                            |
| MODE          | : Tx & Rx 4MHz                   |
| SCANS/BAND    | : 1                              |
| NOTES         | : TESTED WITH WL183 MICROPHONE   |
| TEST DATE     | : 11 Sep 2014 13:00:53           |
| ANT. POLARIZ. | : HORIZONTAL                     |

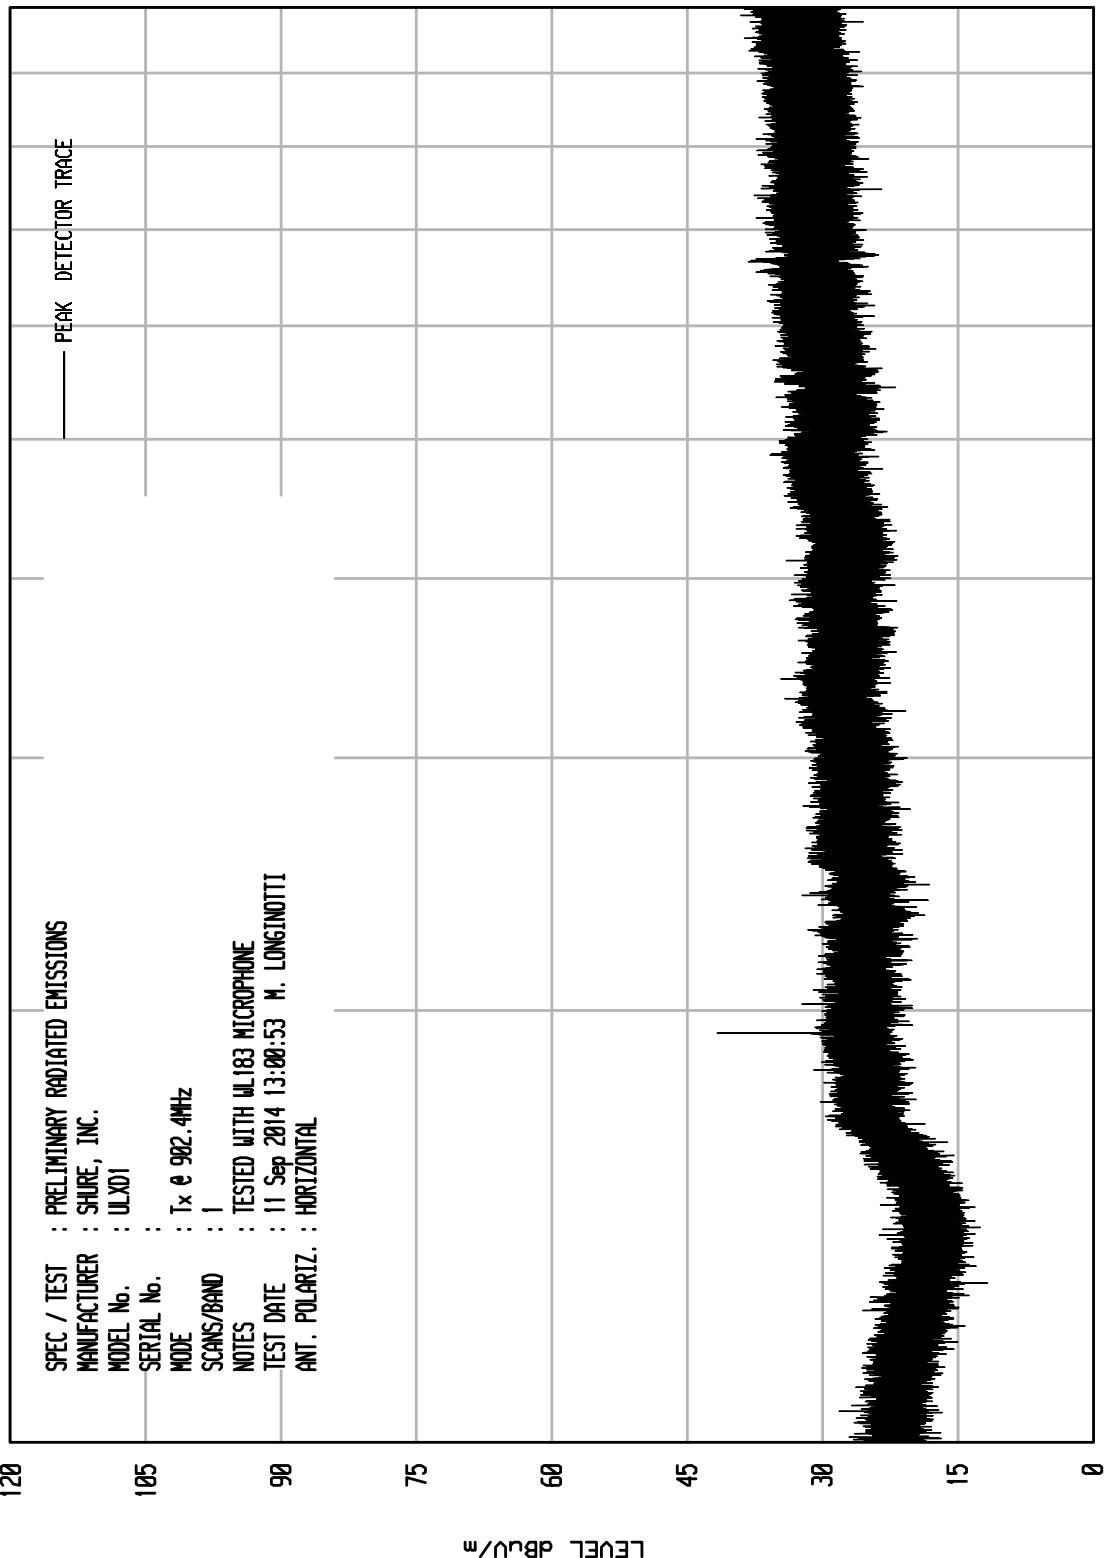


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 28

|  |                               |
|--|-------------------------------|
| SPEC / TEST : PRELIMINARY RADIATED EMISSIONS |                               |
| MANUFACTURER                                 | : SHURE, INC.                 |
| MODEL No.                                    | : ULAD1                       |
| SERIAL No.                                   | : 105                         |
| MODE   | : Tx & Rx 4MHz                |
| SCANS/BAND                                   | : 1                           |
| NOTES  | : TESTED WITH W183 MICROPHONE |
| TEST DATE                                    | : 11 Sep 2014 13:04:09        |
| ANT. POLARIZ.                                | : VERTICAL                    |

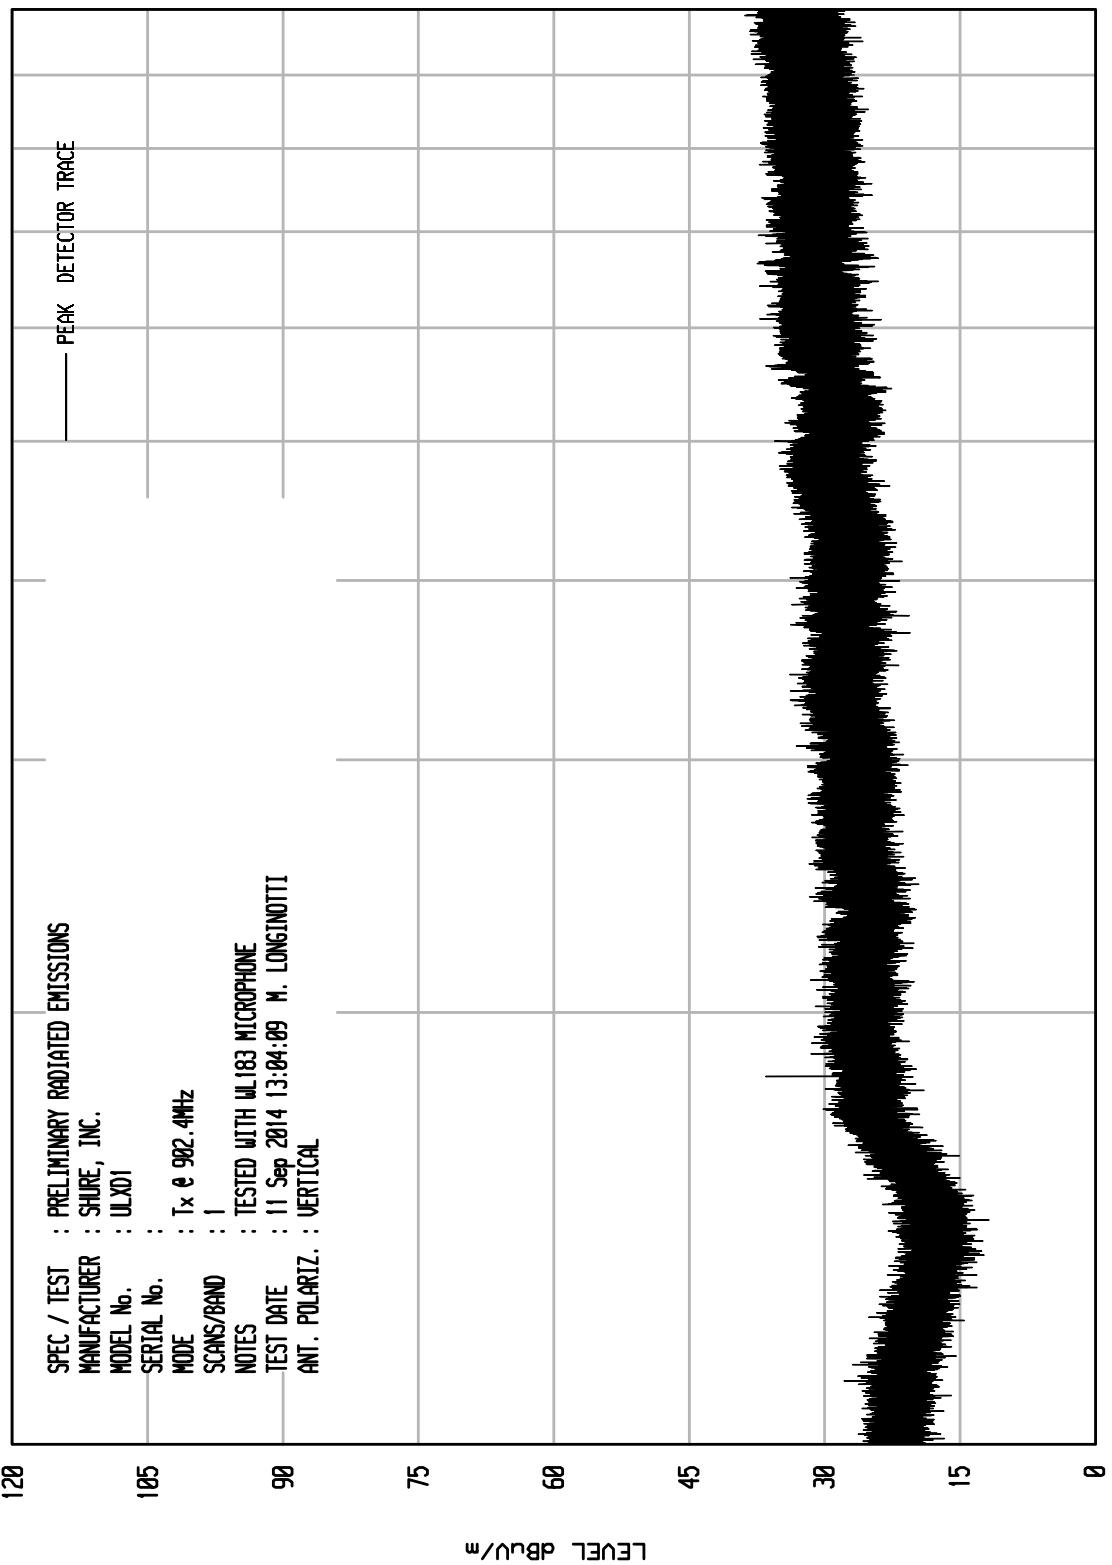


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 15

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. :  
MODE : Tx @ 915MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:21:08 M. LONGINOTTI  
ANT. POLARIZ. : HORIZONTAL

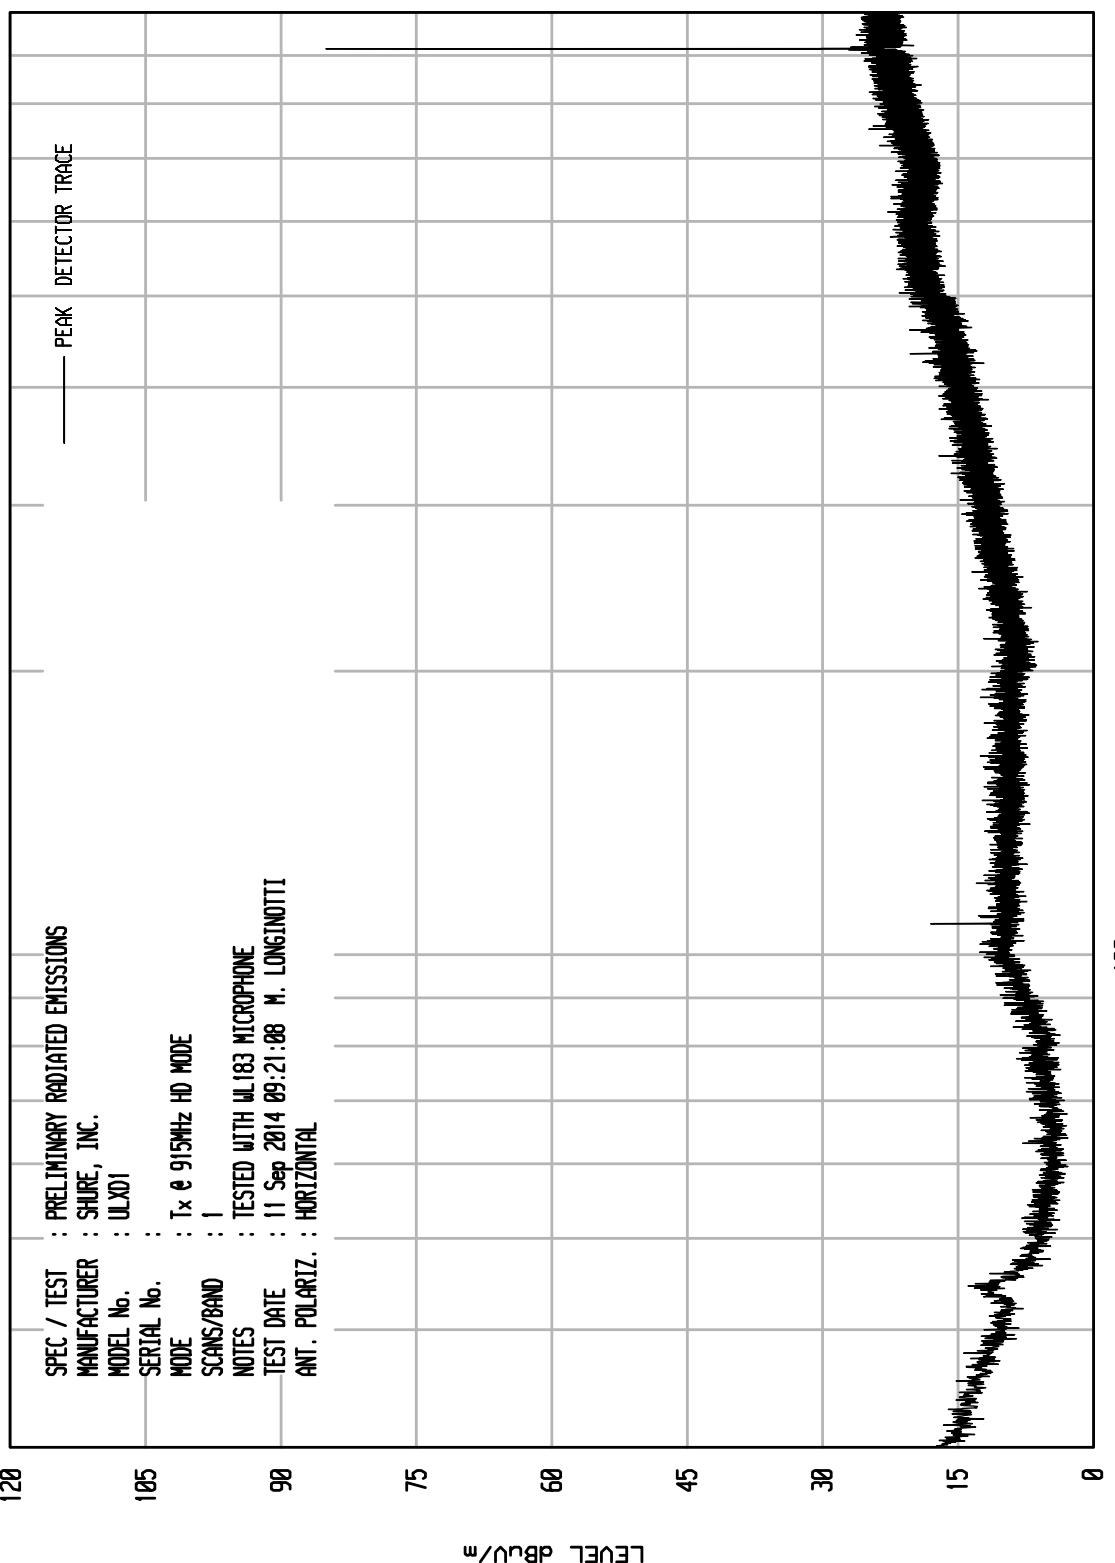


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 16

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. : 105  
MODE : Tx @ 915MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:23:43 M. LONGINOTTI  
ANT. POLARIZ. : VERTICAL

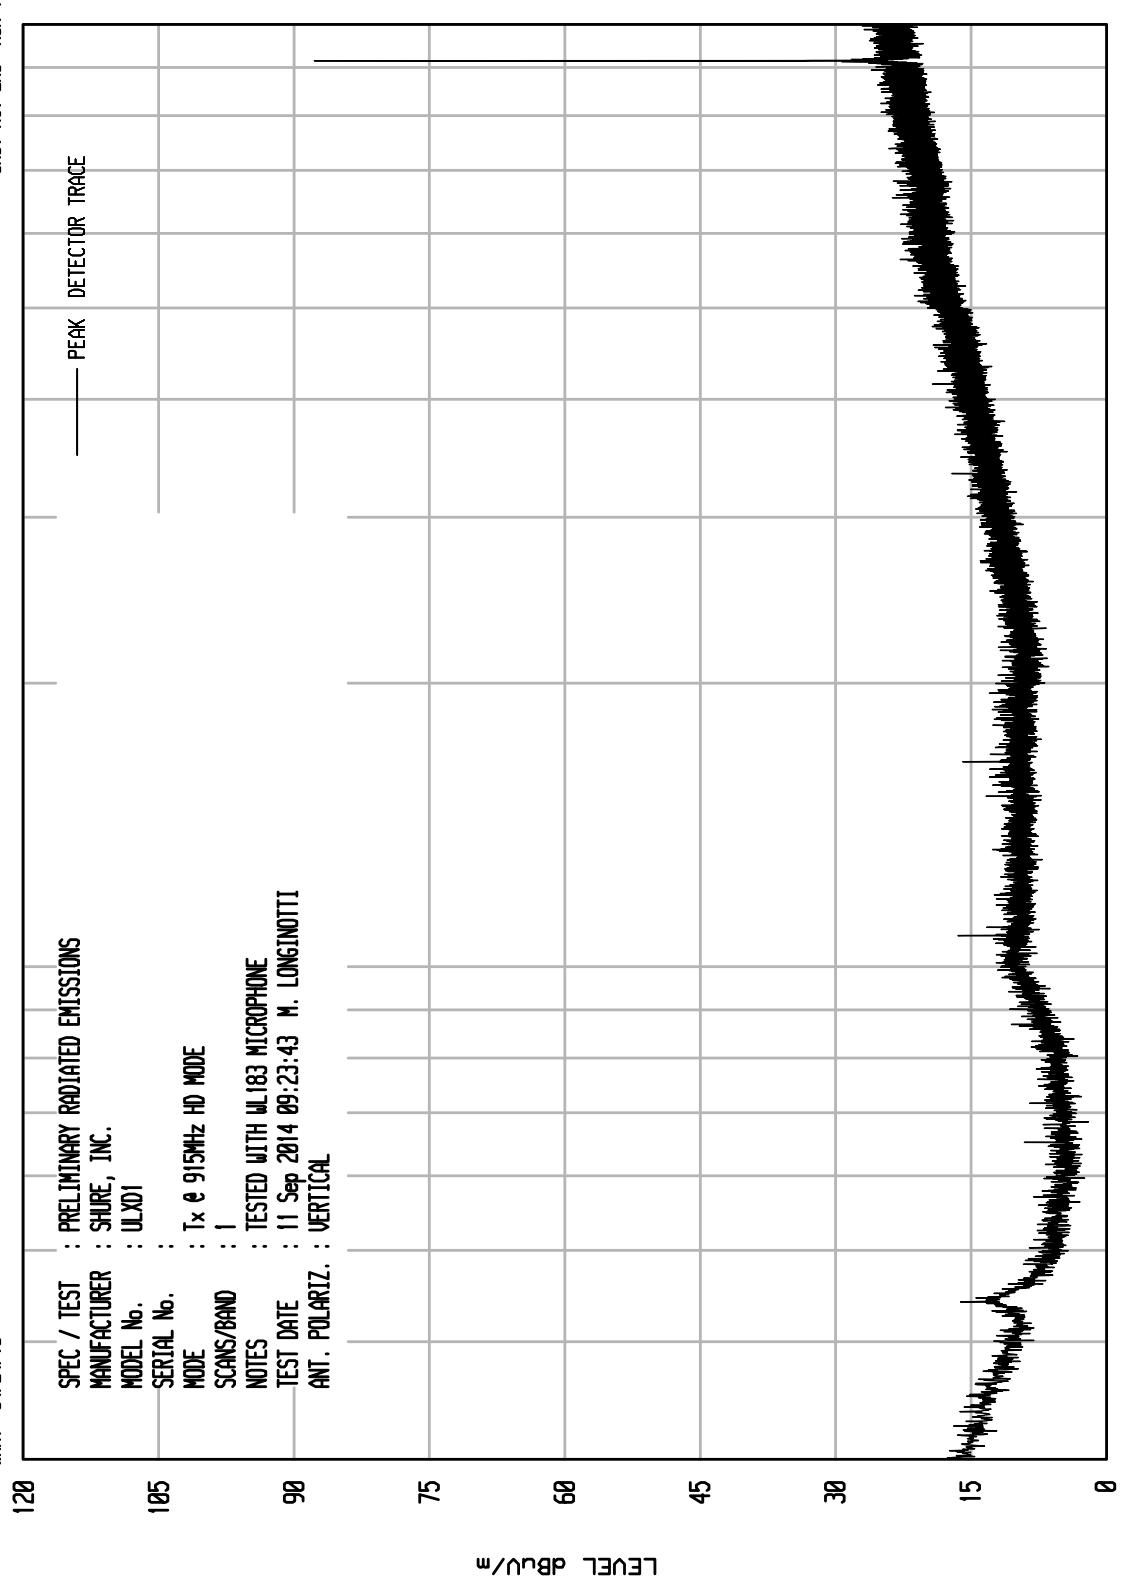


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 30

|  |                                |
|--|--------------------------------|
| SPEC / TEST : PRELIMINARY RADIATED EMISSIONS |                                |
| MANUFACTURER                                 | : SHURE, INC.                  |
| MODEL No.                                    | : ULAD1                        |
| SERIAL No.                                   | : 105                          |
| MODE   | : Tx @ 915MHz                  |
| SCANS/BAND                                   | : 1                            |
| NOTES  | : TESTED WITH WL183 MICROPHONE |
| TEST DATE                                    | : 11 Sep 2014 13:10:24         |
| ANT. POLARIZ.                                | : HORIZONTAL                   |

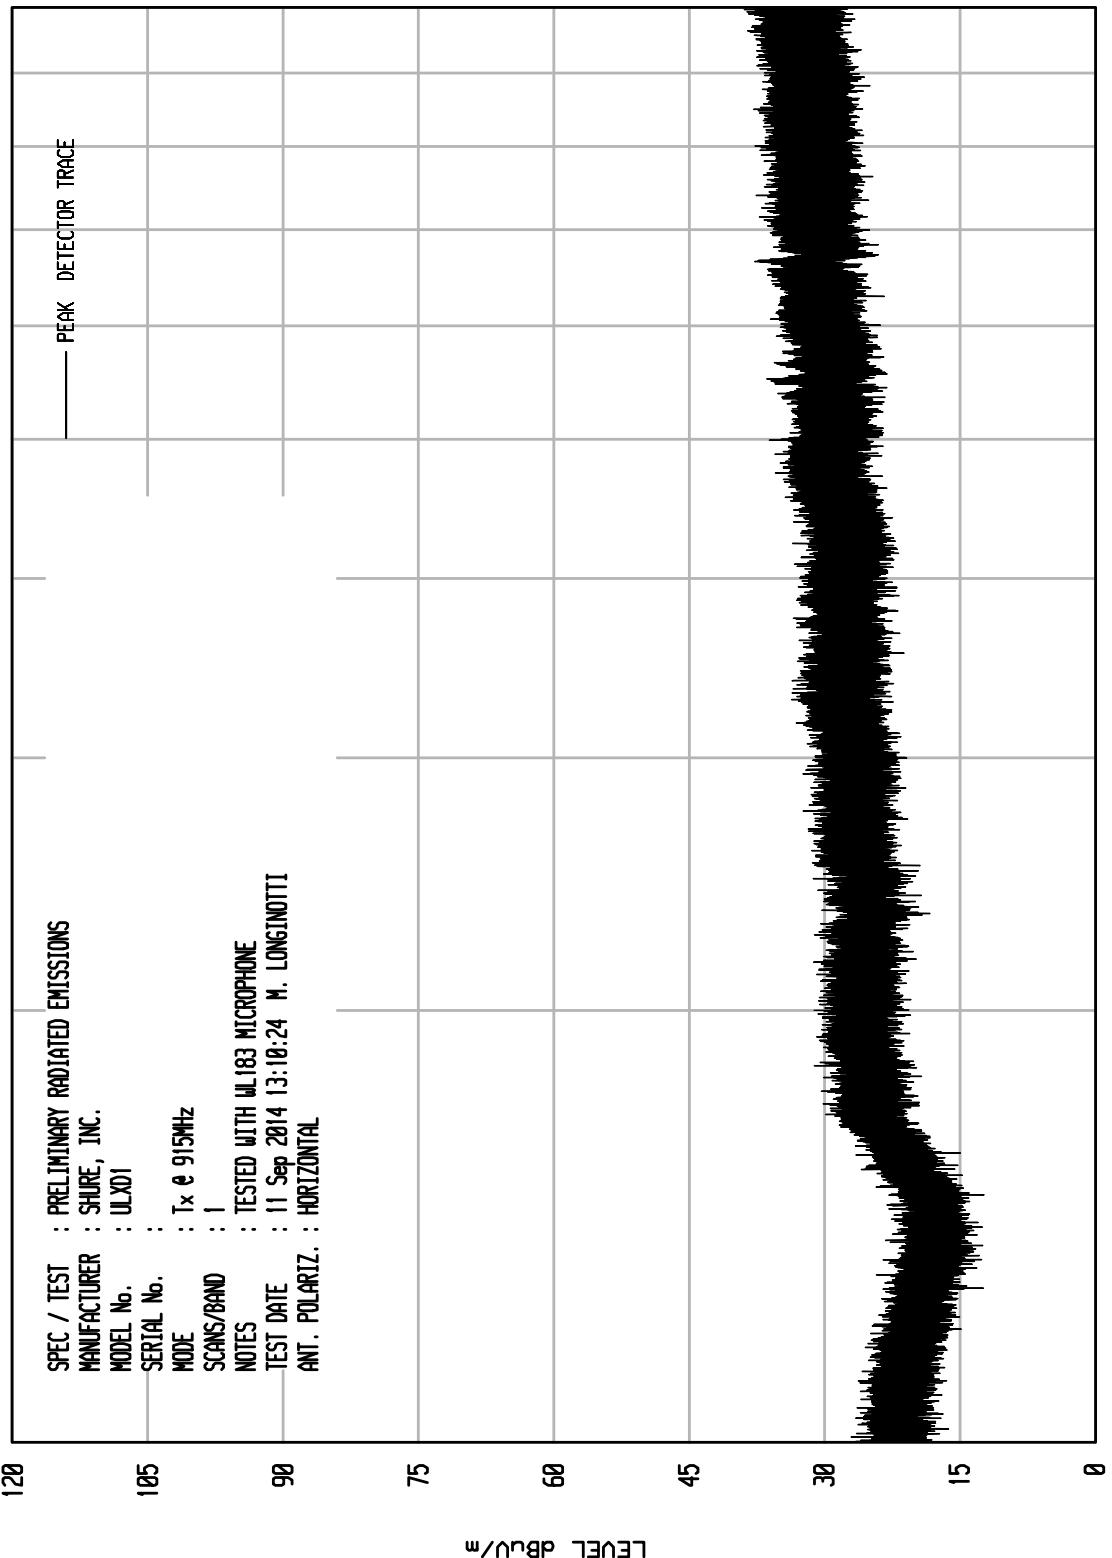


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 29

|  |                                |
|--|--------------------------------|
| SPEC / TEST : PRELIMINARY RADIATED EMISSIONS |                                |
| MANUFACTURER                                 | : SHURE, INC.                  |
| MODEL No.                                    | : ULAD1                        |
| SERIAL No.                                   | : 105                          |
| MODE   | : Tx & 915MHz                  |
| SCANS/BAND                                   | : 1                            |
| NOTES  | : TESTED WITH WL183 MICROPHONE |
| TEST DATE                                    | : 11 Sep 2014 13:07:41         |
| ANT. POLARIZ.                                | : VERTICAL                     |

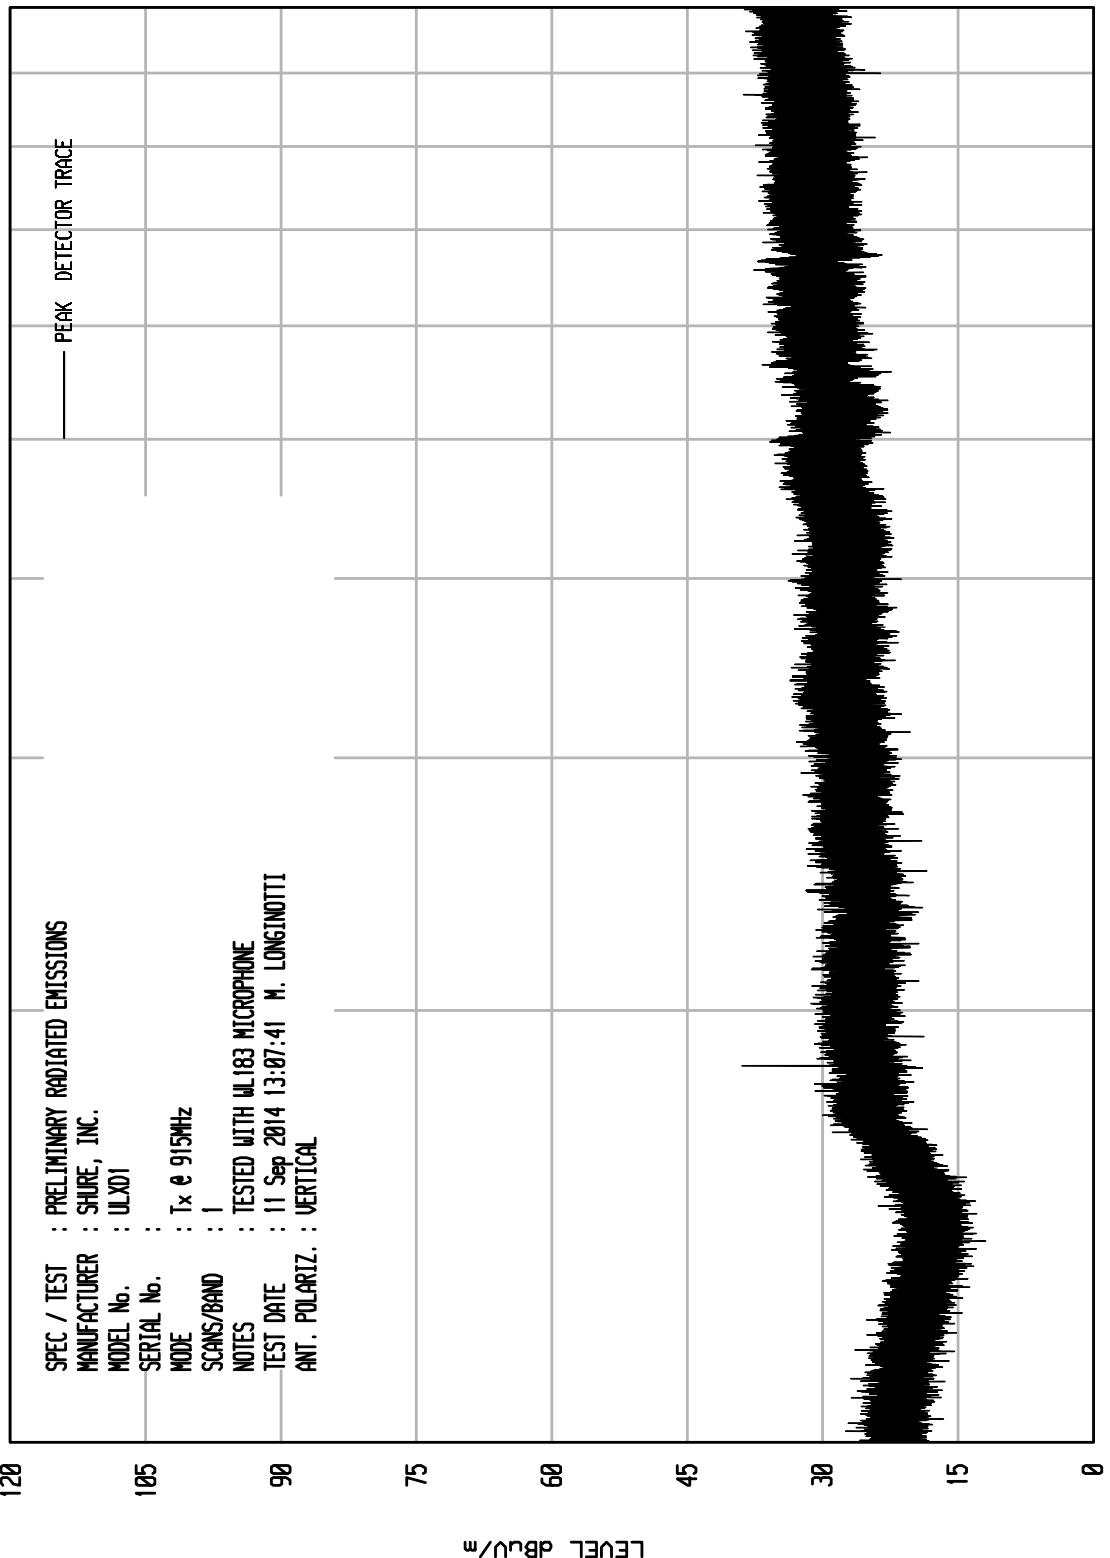


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 19

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. :  
MODE : Tx @ 927.6MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:38:51 M. LONGINOTTI  
ANT. POLARIZ. : HORIZONTAL

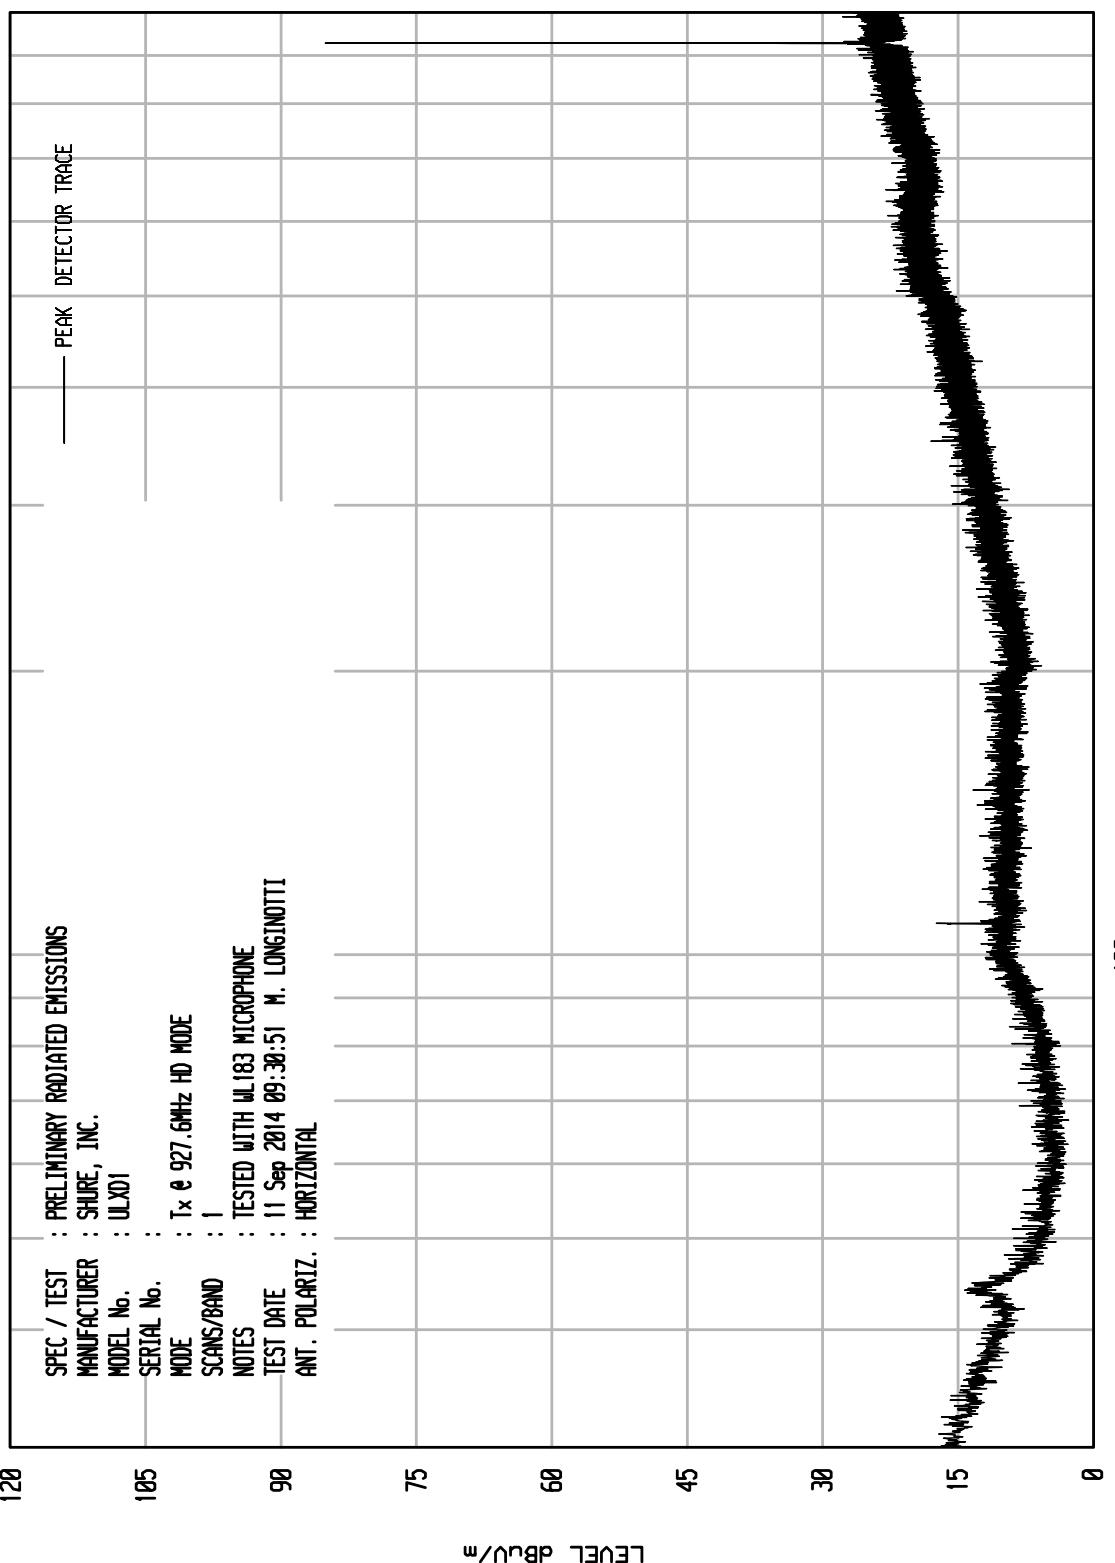


ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNIT0 RCU EMI RUN 20

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
MANUFACTURER : SHURE, INC.  
MODEL No. : ULAD1  
SERIAL No. :  
MODE : Tx @ 927.6MHz HD MODE  
SCANS/BAND : 1  
NOTES : TESTED WITH WL183 MICROPHONE  
TEST DATE : 11 Sep 2014 09:33:43 M. LONGINOTTI  
ANT. POLARIZ. : VERTICAL

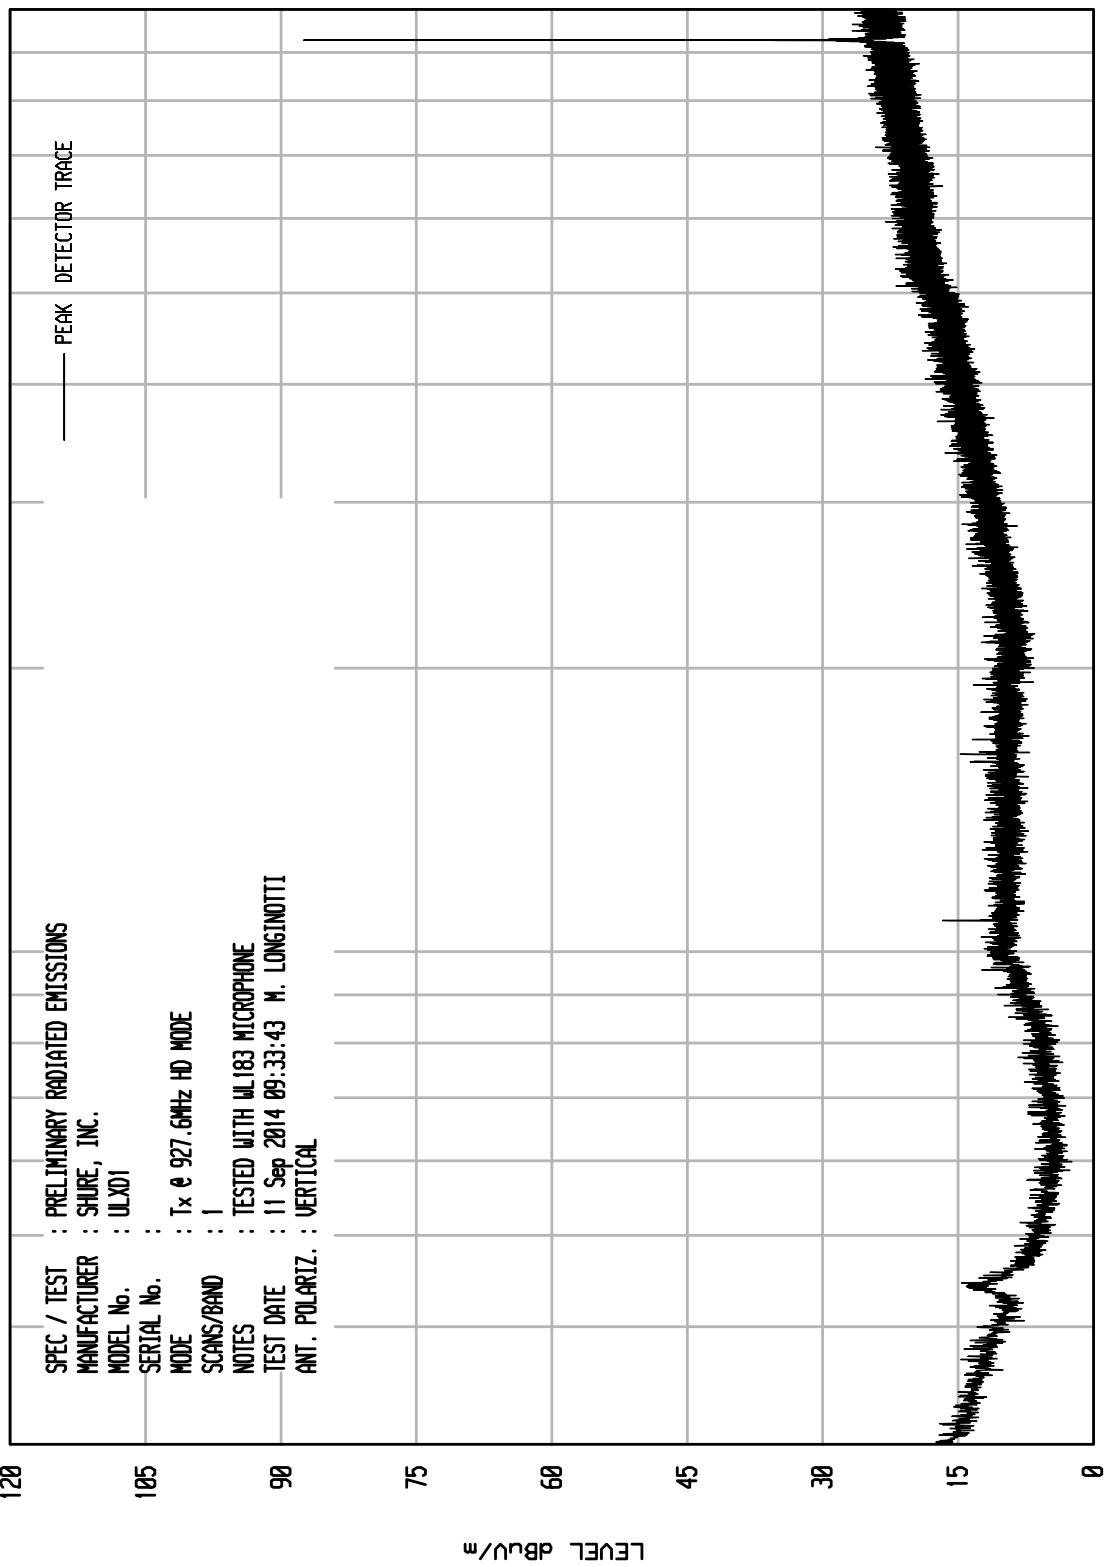

START = 30


STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 31

|  |                                |
|--|--------------------------------|
| SPEC / TEST : PRELIMINARY RADIATED EMISSIONS |                                |
| MANUFACTURER                                 | : SHURE, INC.                  |
| MODEL No.                                    | : ULAD1                        |
| SERIAL No.                                   | : 105                          |
| MODE   | : Tx & 927.6MHz                |
| SCANS/BAND                                   | : 1                            |
| NOTES  | : TESTED WITH WL183 MICROPHONE |
| TEST DATE                                    | : 11 Sep 2014 14:18:15         |
| ANT. POLARIZ.                                | : HORIZONTAL                   |

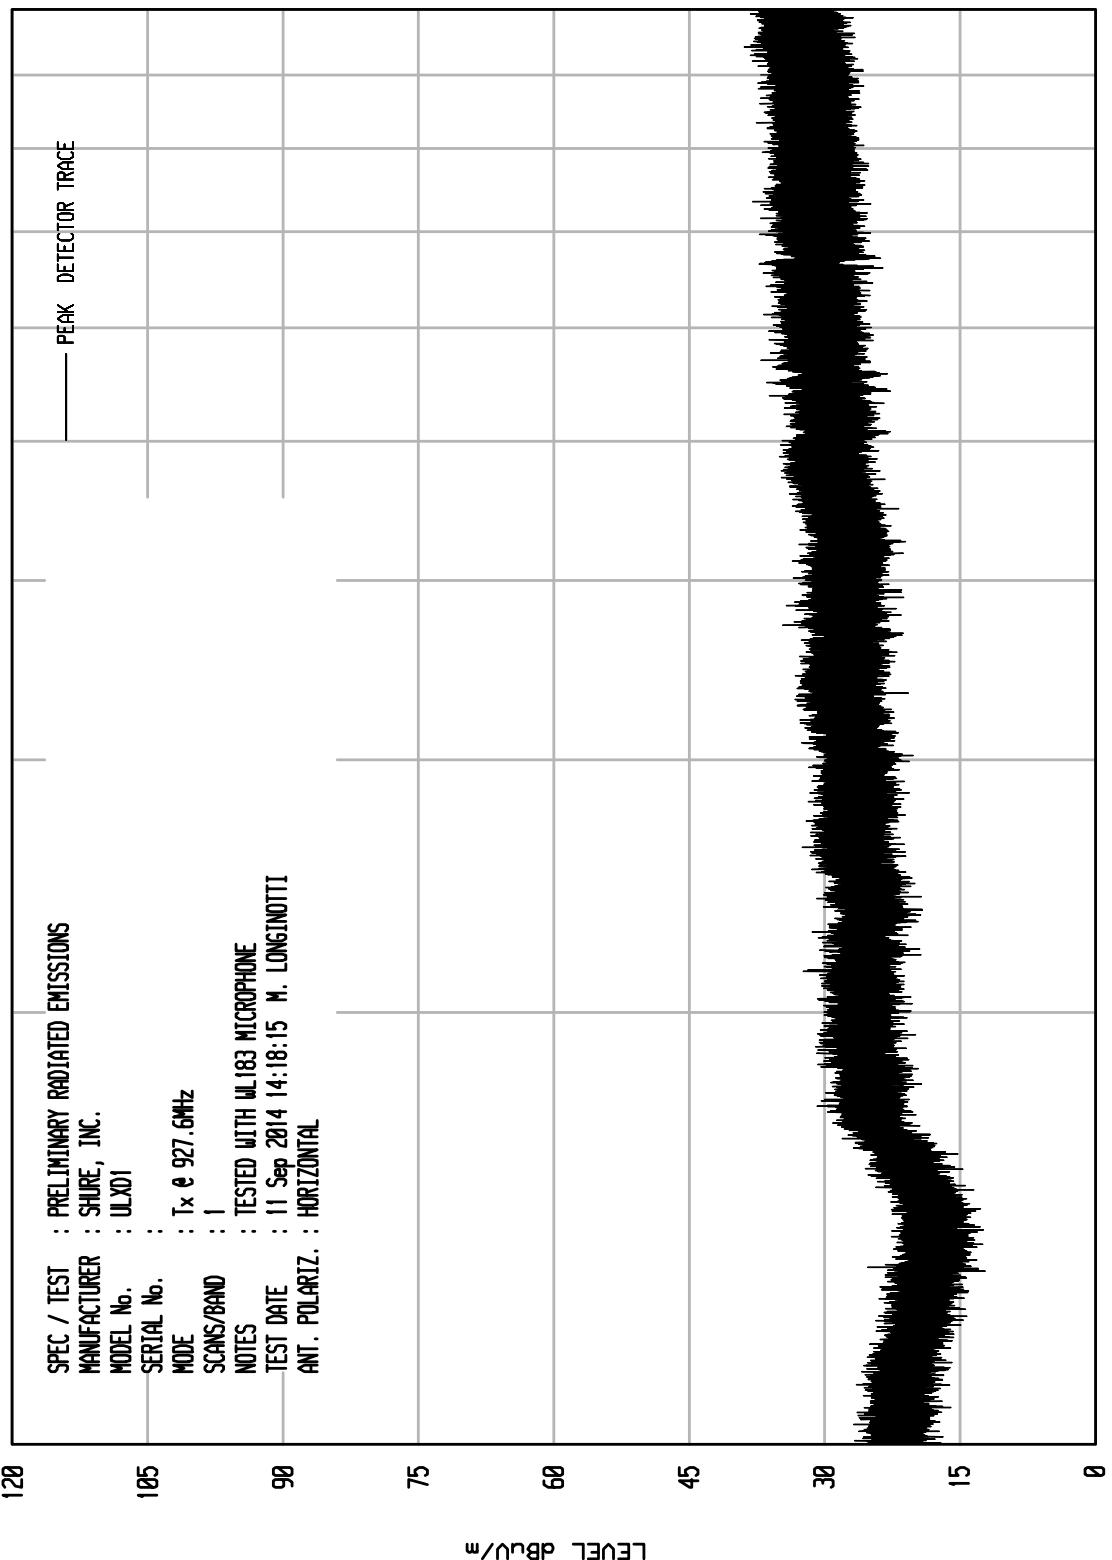

START = 10000

STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

WKA1 04/24/13

UNITO RCU EMI RUN 32

|  |                               |
|--|-------------------------------|
| SPEC / TEST : PRELIMINARY RADIATED EMISSIONS |                               |
| MANUFACTURER                                 | : SHURE, INC.                 |
| MODEL No.                                    | : ULAD1                       |
| SERIAL No.                                   | : 105                         |
| MODE   | : Tx & 927.6MHz               |
| SCANS/BAND                                   | : 1                           |
| NOTES  | : TESTED WITH W183 MICROPHONE |
| TEST DATE                                    | : 11 Sep 2014 14:25:04        |
| ANT. POLARIZ.                                | : VERTICAL                    |

120

105

90

75

60

45

30

15


0

LEVEL dB<sub>RU</sub>/m

START = 10000

FREQUENCY MHz

STOP = 100000

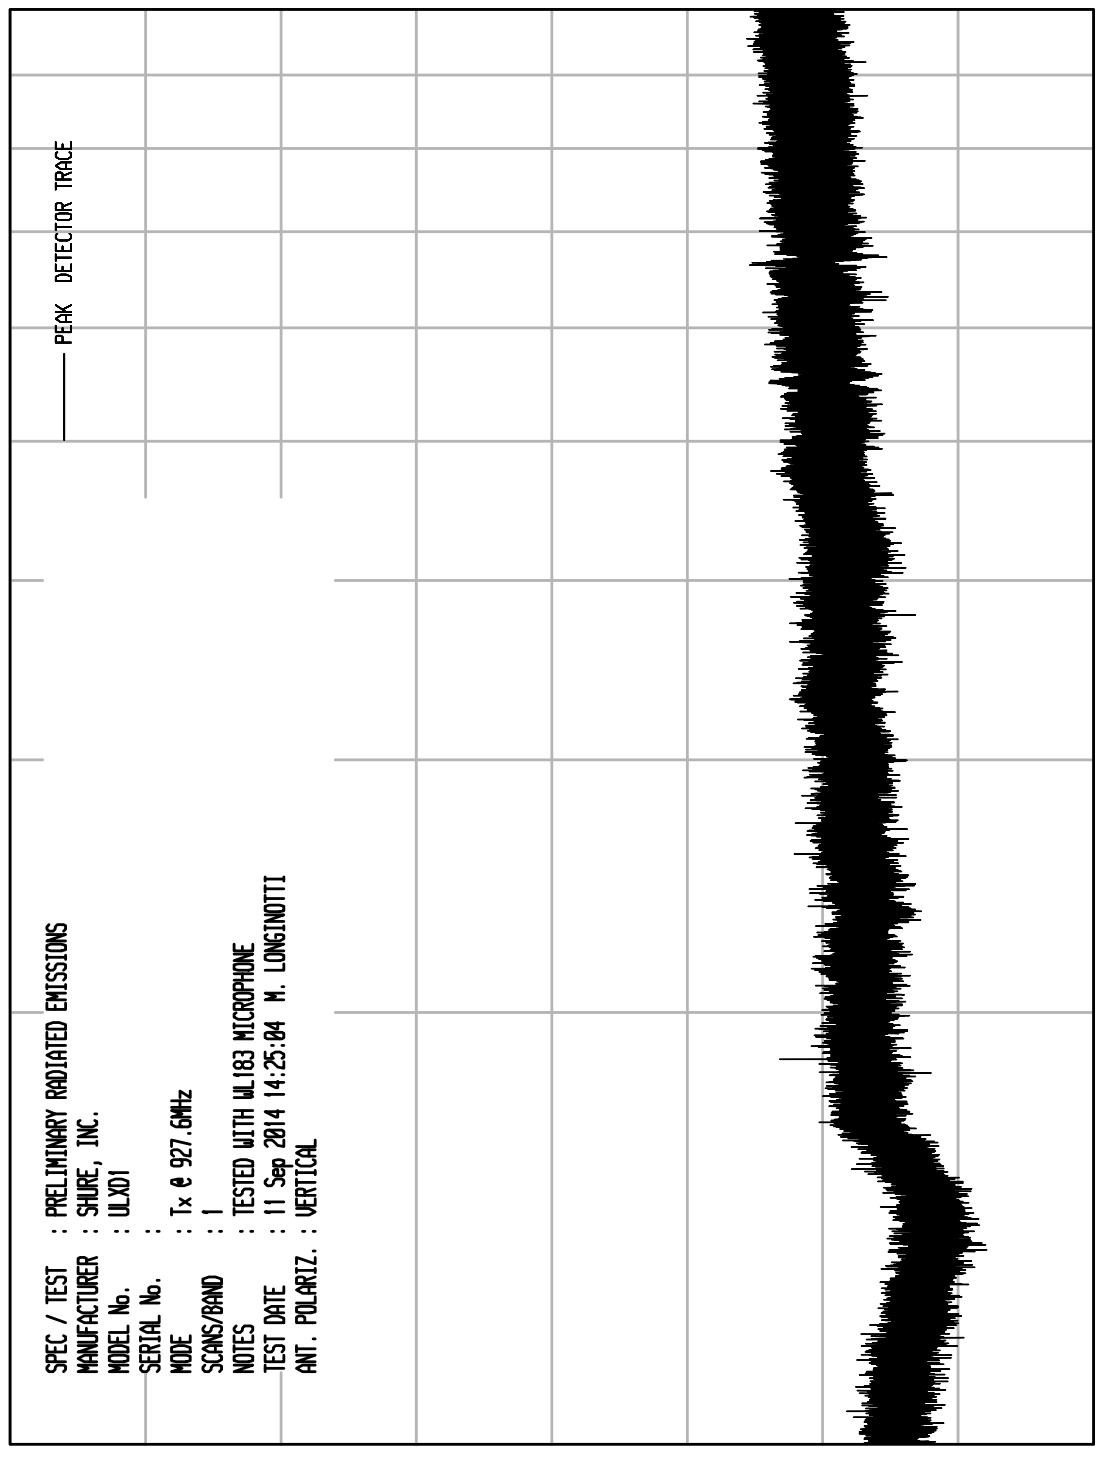

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 902.4MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : QP detector with 120kHz RBW used below 1GHz  
           : Peak detector with 1MHz RBW used above 1GHz

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | QP/Peak<br>Total<br>dBuV/m<br>at 3m | QP/Peak<br>Total<br>uV/m<br>at 3 m | QP/Peak<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 902.400      | H          | 65.0                       |         | 1.5                | 20.5               | 0.0                | 87.1                                | 22640.8                            | 50000.0                            | -6.9           |
| 902.400      | V          | 70.4                       |         | 1.5                | 20.5               | 0.0                | 92.5                                | 42159.1                            | 50000.0                            | -1.5           |
| 1804.800     | H          | 50.3                       | Ambient | 2.2                | 30.7               | -39.8              | 43.5                                | 148.8                              | 5000.0                             | -30.5          |
| 1804.800     | V          | 54.7                       |         | 2.2                | 30.7               | -39.8              | 47.9                                | 247.0                              | 5000.0                             | -26.1          |
| 2707.200     | H          | 48.9                       | Ambient | 2.8                | 32.7               | -39.5              | 44.9                                | 175.2                              | 5000.0                             | -29.1          |
| 2707.200     | V          | 49.5                       | Ambient | 2.8                | 32.7               | -39.5              | 45.5                                | 187.8                              | 5000.0                             | -28.5          |
| 3609.600     | H          | 48.5                       | Ambient | 3.2                | 33.4               | -38.9              | 46.3                                | 207.2                              | 5000.0                             | -27.7          |
| 3609.600     | V          | 48.1                       | Ambient | 3.2                | 33.4               | -38.9              | 45.9                                | 197.9                              | 5000.0                             | -28.1          |
| 4512.000     | H          | 48.1                       | Ambient | 3.6                | 34.5               | -38.9              | 47.3                                | 232.2                              | 5000.0                             | -26.7          |
| 4512.000     | V          | 47.7                       | Ambient | 3.6                | 34.5               | -38.9              | 46.9                                | 221.7                              | 5000.0                             | -27.1          |
| 5414.400     | H          | 45.9                       | Ambient | 3.9                | 34.9               | -39.0              | 45.7                                | 192.8                              | 5000.0                             | -28.3          |
| 5414.400     | V          | 45.5                       | Ambient | 3.9                | 34.9               | -39.0              | 45.3                                | 184.1                              | 5000.0                             | -28.7          |
| 6316.800     | H          | 47.2                       | Ambient | 4.3                | 35.8               | -39.0              | 48.2                                | 257.5                              | 5000.0                             | -25.8          |
| 6316.800     | V          | 46.8                       | Ambient | 4.3                | 35.8               | -39.0              | 47.8                                | 245.9                              | 5000.0                             | -26.2          |
| 7219.200     | H          | 47.6                       | Ambient | 4.6                | 35.6               | -39.0              | 48.8                                | 276.9                              | 5000.0                             | -25.1          |
| 7219.200     | V          | 47.9                       | Ambient | 4.6                | 35.6               | -39.0              | 49.1                                | 286.6                              | 5000.0                             | -24.8          |
| 8121.600     | H          | 48.2                       | Ambient | 4.9                | 35.9               | -39.0              | 50.1                                | 318.2                              | 5000.0                             | -23.9          |
| 8121.600     | V          | 47.4                       | Ambient | 4.9                | 35.9               | -39.0              | 49.3                                | 290.2                              | 5000.0                             | -24.7          |
| 9024.000     | H          | 46.3                       | Ambient | 4.9                | 36.2               | -38.9              | 48.5                                | 267.3                              | 5000.0                             | -25.4          |
| 9024.000     | V          | 47.1                       | Ambient | 4.9                | 36.2               | -38.9              | 49.3                                | 293.1                              | 5000.0                             | -24.6          |

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Peak Total (uV/m) = 10^(Peak Total (dBuV/m)/20)

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 902.4MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : Average Readings with a 1MHz RBW, 10Hz VBW

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | Average<br>Total<br>dBuV/m<br>at 3m | Average<br>Total<br>uV/m<br>at 3 m | Average<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 1804.80      | H          | 39.9                       |         | 2.2                | 30.7               | -39.8              | 33.1                                | 45.0                               | 500.0                              | -20.9          |
| 1804.80      | V          | 48.6                       |         | 2.2                | 30.7               | -39.8              | 41.8                                | 122.4                              | 500.0                              | -12.2          |
| 2707.20      | H          | 36.9                       | Ambient | 2.8                | 32.7               | -39.5              | 32.9                                | 44.0                               | 500.0                              | -21.1          |
| 2707.20      | V          | 37.3                       | Ambient | 2.8                | 32.7               | -39.5              | 33.3                                | 46.1                               | 500.0                              | -20.7          |
| 3609.60      | H          | 36.3                       | Ambient | 3.2                | 33.4               | -38.9              | 34.1                                | 50.9                               | 500.0                              | -19.9          |
| 3609.60      | V          | 36.2                       | Ambient | 3.2                | 33.4               | -38.9              | 34.0                                | 50.3                               | 500.0                              | -20.0          |
| 4512.00      | H          | 36.1                       | Ambient | 3.6                | 34.5               | -38.9              | 35.3                                | 58.3                               | 500.0                              | -18.7          |
| 4512.00      | V          | 35.8                       | Ambient | 3.6                | 34.5               | -38.9              | 35.0                                | 56.3                               | 500.0                              | -19.0          |
| 5414.40      | H          | 34.1                       | Ambient | 3.9                | 34.9               | -39.0              | 33.9                                | 49.6                               | 500.0                              | -20.1          |
| 5414.40      | V          | 34                         | Ambient | 3.9                | 34.9               | -39.0              | 33.8                                | 49.0                               | 500.0                              | -20.2          |
| 6316.80      | H          | 34.9                       | Ambient | 4.3                | 35.8               | -39.0              | 35.9                                | 62.5                               | 500.0                              | -18.1          |
| 6316.80      | V          | 35                         | Ambient | 4.3                | 35.8               | -39.0              | 36.0                                | 63.2                               | 500.0                              | -18.0          |
| 7219.20      | H          | 36.3                       | Ambient | 4.6                | 35.6               | -39.0              | 37.5                                | 75.4                               | 500.0                              | -16.4          |
| 7219.20      | V          | 36.4                       | Ambient | 4.6                | 35.6               | -39.0              | 37.6                                | 76.3                               | 500.0                              | -16.3          |
| 8121.60      | H          | 35.7                       | Ambient | 4.9                | 35.9               | -39.0              | 37.6                                | 75.4                               | 500.0                              | -16.4          |
| 8121.60      | V          | 35.7                       | Ambient | 4.9                | 35.9               | -39.0              | 37.6                                | 75.4                               | 500.0                              | -16.4          |
| 9024.00      | H          | 35.3                       | Ambient | 4.9                | 36.2               | -38.9              | 37.5                                | 75.3                               | 500.0                              | -16.4          |
| 9024.00      | V          | 35.3                       | Ambient | 4.9                | 36.2               | -38.9              | 37.5                                | 75.3                               | 500.0                              | -16.4          |

Average Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Average Total (uV/m) =  $10^{(Average\ Total\ (dBuV/m)/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 915MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : QP detector with 120kHz RBW used below 1GHz  
           : Peak detector with 1MHz RBW used above 1GHz

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | QP/Peak<br>Total<br>dBuV/m<br>at 3m | QP/Peak<br>Total<br>uV/m<br>at 3 m | QP/Peak<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 915.000      | H          | 67.8                       |         | 1.6                | 20.6               | 0.0                | 90.0                                | 31479.7                            | 50000.0                            | -4.0           |
| 915.000      | V          | 69.3                       |         | 1.6                | 20.6               | 0.0                | 91.5                                | 37413.7                            | 50000.0                            | -2.5           |
| 1830.000     | H          | 52.4                       |         | 2.2                | 30.8               | -39.7              | 45.7                                | 192.2                              | 5000.0                             | -28.3          |
| 1830.000     | V          | 53.6                       |         | 2.2                | 30.8               | -39.7              | 46.9                                | 220.7                              | 5000.0                             | -27.1          |
| 2745.000     | H          | 48.6                       | Ambient | 2.8                | 32.8               | -39.5              | 44.7                                | 171.6                              | 5000.0                             | -29.3          |
| 2745.000     | V          | 48.4                       | Ambient | 2.8                | 32.8               | -39.5              | 44.5                                | 167.7                              | 5000.0                             | -29.5          |
| 3660.000     | H          | 47.4                       | Ambient | 3.3                | 33.5               | -38.9              | 45.3                                | 184.1                              | 5000.0                             | -28.7          |
| 3660.000     | V          | 48.1                       | Ambient | 3.3                | 33.5               | -38.9              | 46.0                                | 199.6                              | 5000.0                             | -28.0          |
| 4575.000     | H          | 48.5                       | Ambient | 3.6                | 34.5               | -38.9              | 47.7                                | 243.4                              | 5000.0                             | -26.3          |
| 4575.000     | V          | 47.7                       | Ambient | 3.6                | 34.5               | -38.9              | 46.9                                | 221.9                              | 5000.0                             | -27.1          |
| 5490.000     | H          | 47.5                       | Ambient | 3.9                | 34.9               | -39.0              | 47.3                                | 230.7                              | 5000.0                             | -26.7          |
| 5490.000     | V          | 47.7                       | Ambient | 3.9                | 34.9               | -39.0              | 47.5                                | 236.1                              | 5000.0                             | -26.5          |
| 6405.000     | H          | 48.6                       | Ambient | 4.3                | 35.9               | -39.0              | 49.8                                | 310.2                              | 5000.0                             | -24.1          |
| 6405.000     | V          | 48.0                       | Ambient | 4.3                | 35.9               | -39.0              | 49.2                                | 289.5                              | 5000.0                             | -24.7          |
| 7320.000     | H          | 48.9                       | Ambient | 4.7                | 35.6               | -39.0              | 50.2                                | 324.4                              | 5000.0                             | -23.8          |
| 7320.000     | V          | 49.0                       | Ambient | 4.7                | 35.6               | -39.0              | 50.3                                | 328.1                              | 5000.0                             | -23.7          |
| 8235.000     | H          | 48.3                       | Ambient | 4.9                | 35.9               | -39.0              | 50.2                                | 324.1                              | 5000.0                             | -23.8          |
| 8235.000     | V          | 48.0                       | Ambient | 4.9                | 35.9               | -39.0              | 49.9                                | 313.1                              | 5000.0                             | -24.1          |
| 9150.000     | H          | 48.9                       | Ambient | 5.0                | 36.2               | -38.9              | 51.2                                | 363.2                              | 5000.0                             | -22.8          |
| 9150.000     | V          | 48.4                       | Ambient | 5.0                | 36.2               | -38.9              | 50.7                                | 342.9                              | 5000.0                             | -23.3          |

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Peak Total (uV/m) =  $10^{(Peak\ Total\ (dBuV/m)/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 915MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : Average Readings with a 1MHz RBW, 10Hz VBW

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | Average<br>Total<br>dBuV/m<br>at 3m | Average<br>Total<br>uV/m<br>at 3 m | Average<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 1830.00      | H          | 40.9                       |         | 2.2                | 30.8               | -39.7              | 34.2                                | 51.1                               | 500.0                              | -19.8          |
| 1830.00      | V          | 46.3                       |         | 2.2                | 30.8               | -39.7              | 39.6                                | 95.2                               | 500.0                              | -14.4          |
| 2745.00      | H          | 36.3                       | Ambient | 2.8                | 32.8               | -39.5              | 32.4                                | 41.6                               | 500.0                              | -21.6          |
| 2745.00      | V          | 36.8                       | Ambient | 2.8                | 32.8               | -39.5              | 32.9                                | 44.1                               | 500.0                              | -21.1          |
| 3660.00      | H          | 35.3                       | Ambient | 3.3                | 33.5               | -38.9              | 33.2                                | 45.7                               | 500.0                              | -20.8          |
| 3660.00      | V          | 36                         | Ambient | 3.3                | 33.5               | -38.9              | 33.9                                | 49.6                               | 500.0                              | -20.1          |
| 4575.00      | H          | 36.2                       | Ambient | 3.6                | 34.5               | -38.9              | 35.4                                | 59.1                               | 500.0                              | -18.6          |
| 4575.00      | V          | 36.2                       | Ambient | 3.6                | 34.5               | -38.9              | 35.4                                | 59.1                               | 500.0                              | -18.6          |
| 5490.00      | H          | 36                         | Ambient | 3.9                | 34.9               | -39.0              | 35.8                                | 61.4                               | 500.0                              | -18.2          |
| 5490.00      | V          | 35.9                       | Ambient | 3.9                | 34.9               | -39.0              | 35.7                                | 60.7                               | 500.0                              | -18.3          |
| 6405.00      | H          | 35.4                       | Ambient | 4.3                | 35.9               | -39.0              | 36.6                                | 67.9                               | 500.0                              | -17.3          |
| 6405.00      | V          | 35.4                       | Ambient | 4.3                | 35.9               | -39.0              | 36.6                                | 67.9                               | 500.0                              | -17.3          |
| 7320.00      | H          | 36.2                       | Ambient | 4.7                | 35.6               | -39.0              | 37.5                                | 75.2                               | 500.0                              | -16.5          |
| 7320.00      | V          | 36.2                       | Ambient | 4.7                | 35.6               | -39.0              | 37.5                                | 75.2                               | 500.0                              | -16.5          |
| 8235.00      | H          | 35.6                       | Ambient | 4.9                | 35.9               | -39.0              | 37.5                                | 75.1                               | 500.0                              | -16.5          |
| 8235.00      | V          | 35.6                       | Ambient | 4.9                | 35.9               | -39.0              | 37.5                                | 75.1                               | 500.0                              | -16.5          |
| 9150.00      | H          | 35.5                       | Ambient | 5.0                | 36.2               | -38.9              | 37.8                                | 77.7                               | 500.0                              | -16.2          |
| 9150.00      | V          | 35.3                       | Ambient | 5.0                | 36.2               | -38.9              | 37.6                                | 75.9                               | 500.0                              | -16.4          |

Average Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Average Total (uV/m) =  $10^{(Average\ Total\ (dBuV/m)/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 927.6MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : QP detector with 120kHz RBW used below 1GHz  
           : Peak detector with 1MHz RBW used above 1GHz

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | QP/Peak<br>Total<br>dBuV/m<br>at 3m | QP/Peak<br>Total<br>uV/m<br>at 3 m | QP/Peak<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 927.600      | H          | 68.1                       |         | 1.6                | 19.8               | 0.0                | 89.5                                | 29920.1                            | 50000.0                            | -4.5           |
| 927.600      | V          | 68.3                       |         | 1.6                | 19.8               | 0.0                | 89.7                                | 30617.0                            | 50000.0                            | -4.3           |
| 1855.200     | H          | 50.1                       | Ambient | 2.3                | 30.9               | -39.7              | 43.5                                | 149.5                              | 5000.0                             | -30.5          |
| 1855.200     | V          | 52.4                       |         | 2.3                | 30.9               | -39.7              | 45.8                                | 194.9                              | 5000.0                             | -28.2          |
| 2782.800     | H          | 48.0                       | Ambient | 2.8                | 32.8               | -39.5              | 44.2                                | 162.3                              | 5000.0                             | -29.8          |
| 2782.800     | V          | 48.2                       | Ambient | 2.8                | 32.8               | -39.5              | 44.4                                | 166.1                              | 5000.0                             | -29.6          |
| 3710.400     | H          | 49.1                       | Ambient | 3.3                | 33.5               | -38.9              | 47.1                                | 225.2                              | 5000.0                             | -26.9          |
| 3710.400     | V          | 49.2                       | Ambient | 3.3                | 33.5               | -38.9              | 47.2                                | 227.8                              | 5000.0                             | -26.8          |
| 4638.000     | H          | 49.2                       | Ambient | 3.6                | 34.6               | -38.9              | 48.5                                | 266.4                              | 5000.0                             | -25.5          |
| 4638.000     | V          | 48.5                       | Ambient | 3.6                | 34.6               | -38.9              | 47.8                                | 245.8                              | 5000.0                             | -26.2          |
| 5565.600     | H          | 45.7                       | Ambient | 4.0                | 34.8               | -39.0              | 45.5                                | 187.5                              | 5000.0                             | -28.5          |
| 5565.600     | V          | 46.0                       | Ambient | 4.0                | 34.8               | -39.0              | 45.8                                | 194.1                              | 5000.0                             | -28.2          |
| 6493.200     | H          | 46.9                       | Ambient | 4.4                | 36.0               | -39.0              | 48.2                                | 258.1                              | 5000.0                             | -25.7          |
| 6493.200     | V          | 46.4                       | Ambient | 4.4                | 36.0               | -39.0              | 47.7                                | 243.7                              | 5000.0                             | -26.2          |
| 7420.800     | H          | 47.4                       | Ambient | 4.7                | 35.7               | -39.0              | 48.8                                | 274.7                              | 5000.0                             | -25.2          |
| 7420.800     | V          | 47.2                       | Ambient | 4.7                | 35.7               | -39.0              | 48.6                                | 268.4                              | 5000.0                             | -25.4          |
| 8348.400     | H          | 47.3                       | Ambient | 4.9                | 35.9               | -39.0              | 49.2                                | 287.3                              | 5000.0                             | -24.8          |
| 8348.400     | V          | 49.0                       | Ambient | 4.9                | 35.9               | -39.0              | 50.9                                | 349.4                              | 5000.0                             | -23.1          |
| 9276.000     | H          | 47.7                       | Ambient | 5.0                | 36.1               | -38.9              | 50.0                                | 317.5                              | 5000.0                             | -23.9          |
| 9276.000     | V          | 47.6                       | Ambient | 5.0                | 36.1               | -38.9              | 49.9                                | 313.9                              | 5000.0                             | -24.0          |

Peak Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Peak Total (uV/m) =  $10^{(Peak\ Total\ (dBuV/m)/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Radiated Emissions  
 Mode : Transmit at 927.6MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : Average Readings with a 1MHz RBW, 10Hz VBW

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | Average<br>Total<br>dBuV/m<br>at 3m | Average<br>Total<br>uV/m<br>at 3 m | Average<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 1855.20      | H          | 38.9                       | Ambient | 2.3                | 30.9               | -39.7              | 32.3                                | 41.2                               | 500.0                              | -21.7          |
| 1855.20      | V          | 44.1                       |         | 2.3                | 30.9               | -39.7              | 37.5                                | 74.9                               | 500.0                              | -16.5          |
| 2782.80      | H          | 36.5                       | Ambient | 2.8                | 32.8               | -39.5              | 32.7                                | 43.2                               | 500.0                              | -21.3          |
| 2782.80      | V          | 36.6                       | Ambient | 2.8                | 32.8               | -39.5              | 32.8                                | 43.7                               | 500.0                              | -21.2          |
| 3710.40      | H          | 37.4                       | Ambient | 3.3                | 33.5               | -38.9              | 35.4                                | 58.5                               | 500.0                              | -18.6          |
| 3710.40      | V          | 38                         | Ambient | 3.3                | 33.5               | -38.9              | 36.0                                | 62.7                               | 500.0                              | -18.0          |
| 4638.00      | H          | 36.1                       | Ambient | 3.6                | 34.6               | -38.9              | 35.4                                | 59.0                               | 500.0                              | -18.6          |
| 4638.00      | V          | 36.1                       | Ambient | 3.6                | 34.6               | -38.9              | 35.4                                | 59.0                               | 500.0                              | -18.6          |
| 5565.60      | H          | 33.7                       | Ambient | 4.0                | 34.8               | -39.0              | 33.5                                | 47.1                               | 500.0                              | -20.5          |
| 5565.60      | V          | 33.3                       | Ambient | 4.0                | 34.8               | -39.0              | 33.1                                | 45.0                               | 500.0                              | -20.9          |
| 6493.20      | H          | 34.9                       | Ambient | 4.4                | 36.0               | -39.0              | 36.2                                | 64.8                               | 500.0                              | -17.7          |
| 6493.20      | V          | 35                         | Ambient | 4.4                | 36.0               | -39.0              | 36.3                                | 65.6                               | 500.0                              | -17.6          |
| 7420.80      | H          | 35.6                       | Ambient | 4.7                | 35.7               | -39.0              | 37.0                                | 70.6                               | 500.0                              | -17.0          |
| 7420.80      | V          | 35.6                       | Ambient | 4.7                | 35.7               | -39.0              | 37.0                                | 70.6                               | 500.0                              | -17.0          |
| 8348.40      | H          | 35.8                       | Ambient | 4.9                | 35.9               | -39.0              | 37.7                                | 76.4                               | 500.0                              | -16.3          |
| 8348.40      | V          | 35.8                       | Ambient | 4.9                | 35.9               | -39.0              | 37.7                                | 76.4                               | 500.0                              | -16.3          |
| 9276.00      | H          | 35.9                       | Ambient | 5.0                | 36.1               | -38.9              | 38.2                                | 81.6                               | 500.0                              | -15.7          |
| 9276.00      | V          | 35.9                       | Ambient | 5.0                | 36.1               | -38.9              | 38.2                                | 81.6                               | 500.0                              | -15.7          |

Average Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Average Total (uV/m) =  $10^{(\text{Average Total (dBuV/m)}/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Occupied Bandwidth (band-edge)  
 Mode : Transmit at 902.4MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : QP detector with 120kHz RBW used below 1GHz  
           : Peak detector with 1MHz RBW used above 1GHz

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | QP<br>Total<br>dBuV/m<br>at 3m | QP<br>Total<br>uV/m<br>at 3 m | QP<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|--------------------------------|-------------------------------|-------------------------------|----------------|
| 902.000      | H          | 18.4                       |         | 1.5                | 20.5               | 0.0                | 40.5                           | 105.8                         | 200.0                         | -5.5           |
| 902.000      | V          | 23.3                       |         | 1.5                | 20.5               | 0.0                | 45.4                           | 186.0                         | 200.0                         | -0.6           |

QP Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

QP Total (uV/m) =  $10^{(\text{Peak Total (dBuV/m)}/20)}$

Manufacturer : Shure Incorporated  
 Model No. : ULXD1  
 Serial No. : None Assigned  
 Date Tested : September 10 and 11, 2014  
 Test Performed : Occupied Bandwidth (band-edge)  
 Mode : Transmit at 927.6MHz, HD Mode  
 Test Distance : 3 meters  
 Notes : QP detector with 120kHz RBW used below 1GHz  
           : Peak detector with 1MHz RBW used above 1GHz

| Freq.<br>MHz | Ant<br>Pol | Meter<br>Reading<br>(dBuV) | Ambient | CBL<br>Fac<br>(dB) | Ant<br>Fac<br>(dB) | Pre<br>Amp<br>(dB) | QP<br>Total<br>dBuV/m<br>at 3m | QP<br>Total<br>uV/m<br>at 3 m | QP<br>Limit<br>uV/m<br>at 3 m | Margin<br>(dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|--------------------------------|-------------------------------|-------------------------------|----------------|
| 928.000      | H          | 21.3                       |         | 1.6                | 19.8               | 0.0                | 42.7                           | 136.6                         | 200.0                         | -3.3           |
| 928.000      | V          | 21.5                       |         | 1.6                | 19.8               | 0.0                | 42.9                           | 139.8                         | 200.0                         | -3.1           |

QP Total (dBuV/m) = Meter Reading (dBuV) + CBL Fac (dB) + Ant Fac (dB) + Pre Amp (dB)

Peak Total (uV/m) =  $10^{(Peak\ Total\ (dBuV/m)/20)}$