



A Test Lab Techno Corp.

No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.)

Tel : +886-3-2710188 / Fax : +886-3-2710190


P15B Measurement Report



Report No.	: 0811FE16
Applicant	: Inventec Corporation
Product Type	: PDA PHONE
Trade Name	: PHAROS
Model Name	: Pharos Traveler 117
FCC ID	: DGIBC0312AAA000
Dates of Test	: Apr. 22 ~ Apr. 24, 2008 ; Nov. 24, 2008
Test Specification	: Part 15 Subpart B
Application	: Class II permissive change
Location of Test Lab.	: Chang-an Lab.

1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.


Country Huang 20081201
Measurement Center Manager

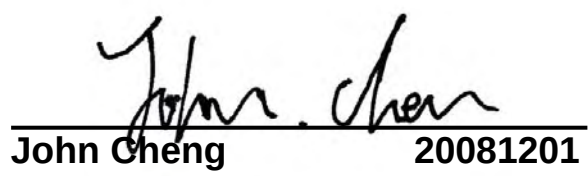
John Cheng 20081201
Testing Engineer




Declaration of Conformity


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003. All test were conducted by *A Test Lab Techno Corp. No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.)* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart B (15.107 & 15.109).

EUT : PDA PHONE
Applicant : Inventec Corporation
Inventec Building, 66 Hou-Kang Street, Shih-Lin District,
Taipei 11170, Taiwan
Trade Name : PHAROS
Model Name : Pharos Traveler 117
FCC ID : DGIBC0312AAA000

Approved by : 
Country Huang 2008/12/01

Prepared by : 
John Cheng 2008/12/01

A Test Lab Techno Corp.

*No.140-1, Chang-an St., Bade City, Tao-Yuan County 334, Taiwan (R.O.C.)
Tel : 03-2710188 / Fax : 03-2710190*



Contents

1. GENERAL	4
1.1 Description of Equipment under Test (EUT)	4
1.2 Introduction	5
1.3 Summary of Tests	5
1.4 Description of Support Equipment	6
1.5 Configuration of System under Test.....	7
1.6 Test Procedure	8
1.7 General Test Condition.....	8
2. Conducted Emissions Requirements	9
2.1 General & Setup:.....	9
2.2 Test Equipment List:.....	9
2.3 Test Configuration:	10
2.4 Test condition:	12
2.5 Conducted Emissions Limits:	12
2.6 Measurement Data of Conducted Emissions:	13
3. Radiated Emissions Requirements.....	19
3.1 Final radiation measurements were made on a three-meter:	19
3.2 Test Equipment List:.....	21
3.3 Test Configuration:	22
3.4 Test condition:	24
3.5 Radiated Emissions Limits:	24
3.6 Measurement Data of Radiated Emissions:.....	25
Appendix A - EUT Test SETUP	31
Appendix B - Block Diagram	33
Appendix C - EUT Photographs	34



1. GENERAL

1.1 Description of Equipment under Test (EUT)

Applicant :

Inventec Corporation
Inventec Building, 66 Hou-Kang Street, Shih-Lin District, Taipei 11170, Taiwan

Manufacturer : Inventec Corporation
Manufacturer Address : Inventec Building, 66 Hou-Kang Street, Shih-Lin District,
Taipei 11170, Taiwan
Product Type : PDA PHONE
Trade Name : PHAROS
Model Name : Pharos Traveler 117
FCC ID : DGIBC0312AAA000
Input Rating : 100 - 240VAC / 0.25 A (AC Adapter)
Frequency of Channel : See Table 1
Type of Modulation : Direct Sequence Spread Spectrum
Type of Antenna : Internal Antenna Type

During testing the EUT was operated at Tx or Rx mode for each emission measured. This was done in order to ensure that maximum emission levels were attained.

802.11b/g Mode	
CH	Frequency
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Table 1. WLAN Frequency of Each Channel (Working Frequency)



1.2 Series Application Description

The model (PHAROS_Pharos Traveler 117) is the variant product of velocitymobile_velocity 103; velocitymobile_velocity 103 FCC ID is DGIBC8121AABAB0. PHAROS_Pharos Traveler 117 is changed from velocitymobile_velocity 103; the difference from velocitymobile_velocity 103 is the model number and the PCB Layout.

1.3 Introduction

The following measurement report is submitted on behalf of **Inventec Corporation** In support of a Class B certification in accordance with Part2 Subpart J and Part 15 Subpart A and B of the Commission's and Regulations.

1.4 Summary of Tests

Some test items of PHAROS_Pharos Traveler 117 copy from the original report which is velocitymobile_Velocity 103 (report number: 0802FE17).

47 CFR Part 15 Subpart B			
Reference	Test	Results	Note
15.107	Conducted Emission Limits	PASS	AC Adapter retest PC Mode Reference Report No: 0802FE17
15.209	Radiated Emissions Limits	PASS	AC Adapter retest PC Mode Reference Report No: 0802FE17



1.5 Description of Support Equipment

Computer	: DELL
Model No.	: PP20L
Serial No.	: UF230 A03
FCC ID	: E2KWM3945ABG
Keyboard	: DELL
Model No.	: SK-8115
Serial No.	: MY-0DJ325-71619-7113-1366
FCC ID	: FCC DOC
Monitor	: DELL
Model No.	: E177FPc
Serial No.	: CN-0FJ179-64180-6BT-4LYS
FCC ID	: FCC DOC
Mouse	: DELL
Model No.	: M056U0A
Serial No.	: F1F026E1
FCC ID	: FCC DOC
Printer	: EPSON
Model No.	: C60
Serial No.	: DR3K041323
FCC ID	: FCC DOC

1.6 Configuration of System under Test

AC Adapter Link

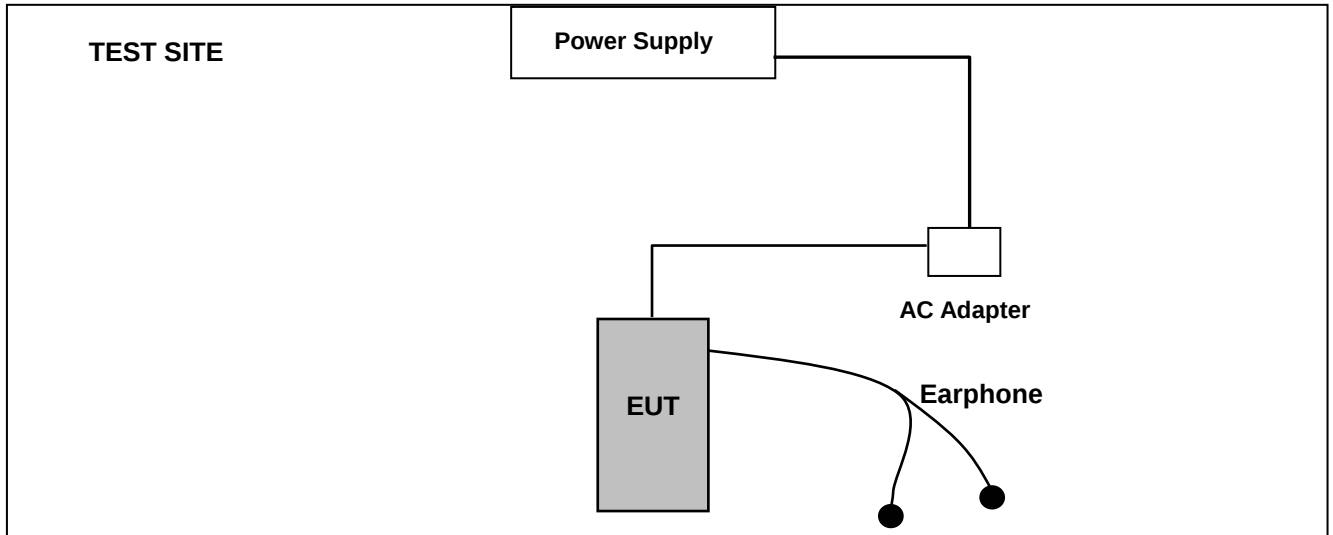


Figure 1. Configuration of System Under Test for AC Adapter Link

During EMI testing the EUT (PDA Phone)'s Power port was connected to AC Adapter. EUT (PDA Phone)'s Earphone connected to earphone.

PC USB Link

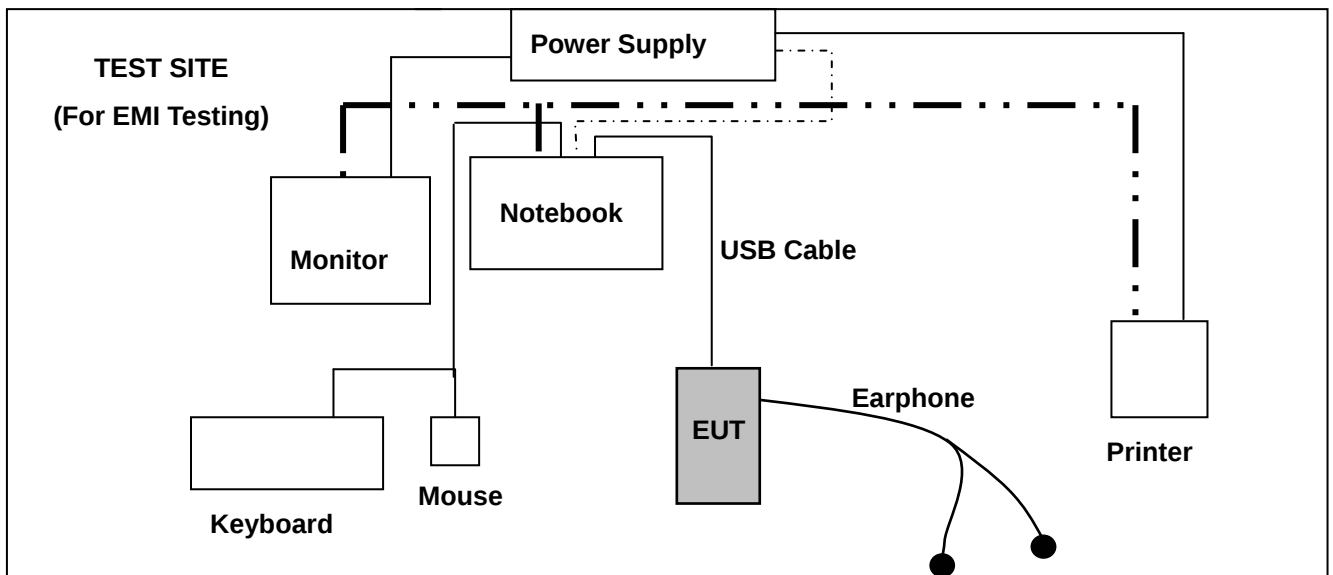


Figure 2. Configuration of System Under Test for PC USB Link

During EMI testing the EUT (PDA Phone)'s USB port connected to the USB port of Notebook & Earphone port connected to earphone. A mouse was connected to the mouse port of Notebook. And a keyboard was connected to the mouse port of Notebook. And a printer was connected to the parallel port.



1.7 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-2003 "Measurement of un-Intentional Radiators."

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated. The system's radiated and conducted emissions were investigated while the computer alternately transferred data to the EUT as well as to the monitor and printer. Using a test program which sent a continuous data and transferred data to and from the EUT was proven to worst case emissions. The system's physical layout and cabling was randomly arranged to ensure that maximum emission levels were attained.



2. Conducted Emissions Requirements

2.1 General & Setup:

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.

2.2 Test Equipment List:

Describe	Manufacturer	Model	Serial Number	Calibration	
				Cal. Date	Due Date
Spectrum Analyzer	Advantest	R3132	160300103	Mar. 06, 2008	Mar. 06, 2009
Test Receiver	R&S	ESCI	100367	Jun. 05, 2008	Jun. 05, 2009
LISN	EMCO	3816/2 SH	00060110	Jun. 03, 2008	Jun. 03, 2009
LISN	EMCO	3816/2 SH	00060111	Jun. 30, 2008	Jun. 30, 2009
Transient Limiter	ELECTRO-METRICS	EM-7600	777	Jun. 26, 2008	Jun. 26, 2009

2.3 Test Configuration:

AC Adapter Mode



Figure 3. Front View of the Test Configuration



Figure 4. Rear View of the Test Configuration

PC USB Link Mode

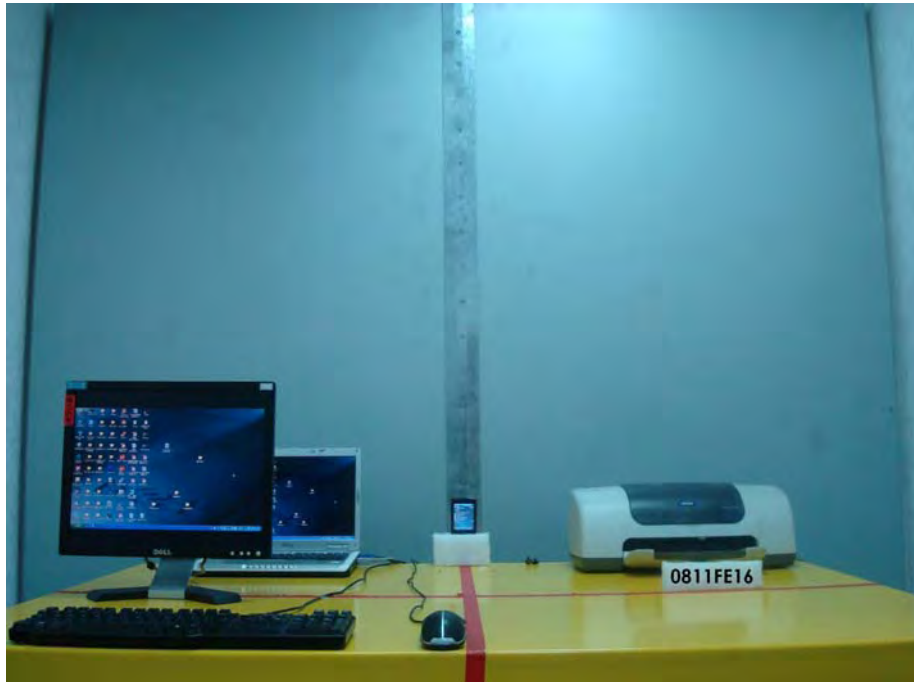


Figure 5. Front View of the Test Configuration

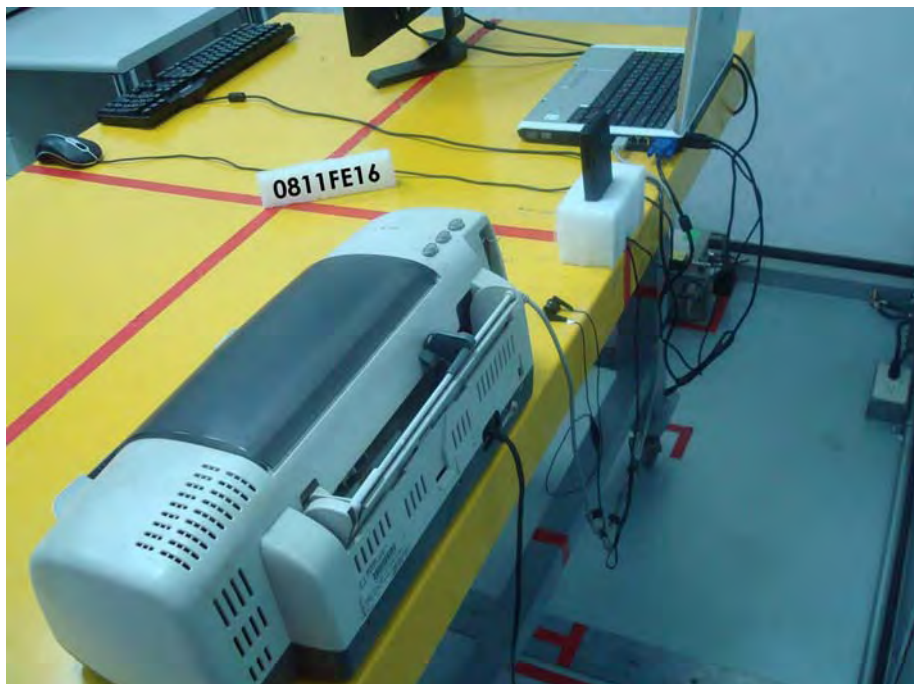


Figure 6. Rear View of the Test Configuration



2.4 Test condition:

EUT tested in accordance with the specifications given by the Manufacturer, and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

Frequency range (MHz)	Limits (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50



2.6 Measurement Data of Conducted Emissions:

2.6.1 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ Stand by
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Pharos Traveler 117(IDEL

Data :#1

Date: 2008/11/24

Time: 下午 09:02:51

80.0 dBuV

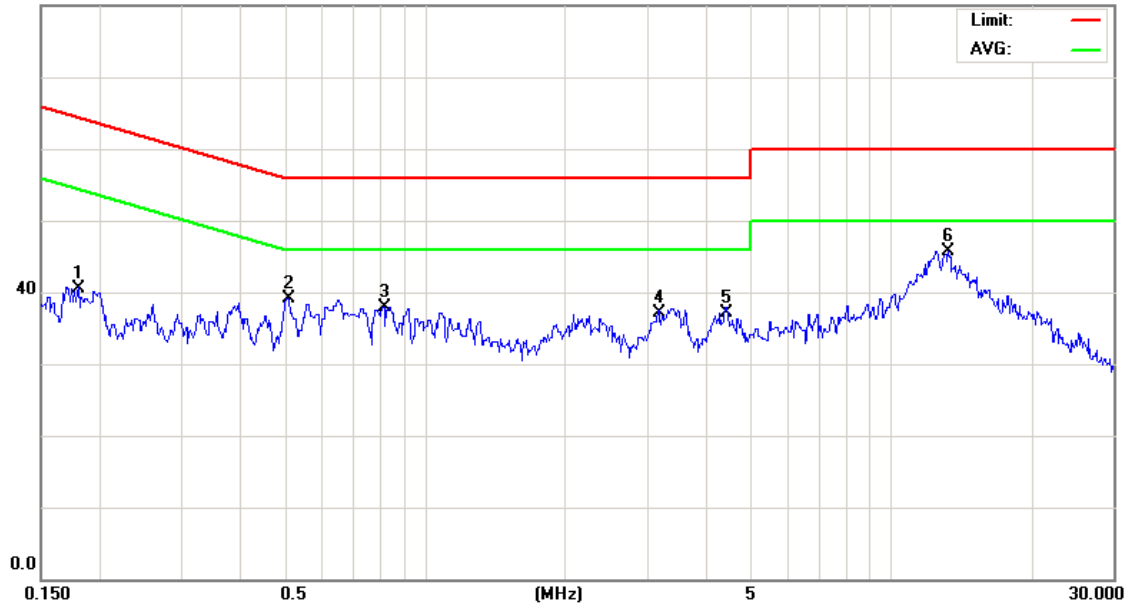

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: IDEL

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1801	30.81	9.74	40.55	64.48	-23.93	peak	
2		0.5090	29.36	9.79	39.15	56.00	-16.85	peak	
3		0.8148	28.05	9.80	37.85	56.00	-18.15	peak	
4		3.1638	27.29	9.91	37.20	56.00	-18.80	peak	
5		4.4149	27.13	10.02	37.15	56.00	-18.85	peak	
6	*	13.2500	35.57	10.20	45.77	60.00	-14.23	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(IDEL

Data :#2

Date: 2008/11/24

Time: 下午 09:08:49

80.0 dBuV

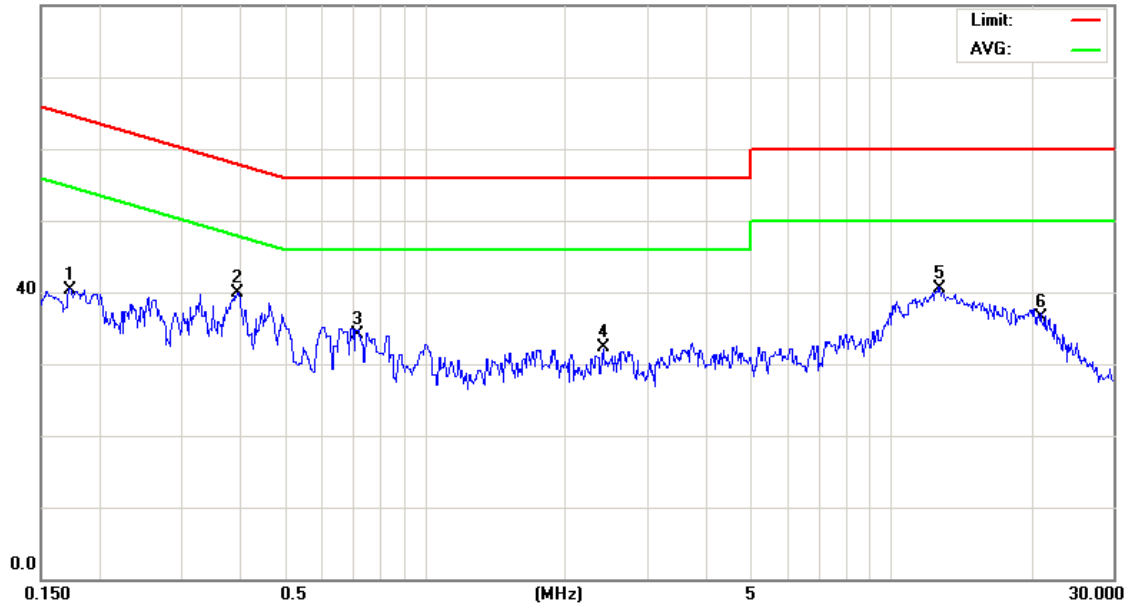

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: IDEL

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1723	30.56	9.73	40.29	64.84	-24.55	peak	
2	*	0.3941	30.04	9.78	39.82	57.98	-18.16	peak	
3		0.7158	24.29	9.80	34.09	56.00	-21.91	peak	
4		2.4079	22.46	9.84	32.30	56.00	-23.70	peak	
5		12.6500	30.29	10.17	40.46	60.00	-19.54	peak	
6		20.9000	26.14	10.30	36.44	60.00	-23.56	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only



2.6.2 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ WLAN 802.11b Link Mode
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#1

Date: 2008/11/24

Time: 下午 07:13:56

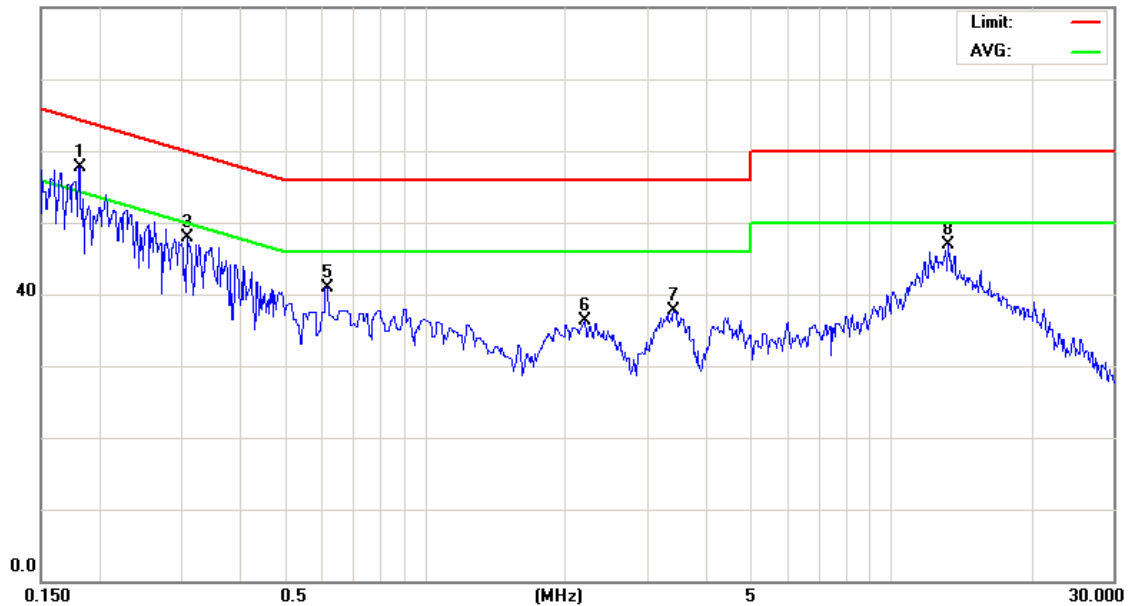

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH01(2412MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1808	47.91	9.74	57.65	64.44	-6.79	peak	
2		0.1808	14.76	9.74	24.50	54.44	-29.94	AVG	
3		0.3082	38.04	9.77	47.81	60.02	-12.21	peak	
4		0.3082	15.33	9.77	25.10	50.02	-24.92	AVG	
5		0.6170	31.08	9.79	40.87	56.00	-15.13	peak	
6		2.2010	26.45	9.88	36.33	56.00	-19.67	peak	
7		3.4160	27.82	9.95	37.77	56.00	-18.23	peak	
8		13.2500	36.71	10.20	46.91	60.00	-13.09	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#2

Date: 2008/11/24

Time: 下午 07:21:59

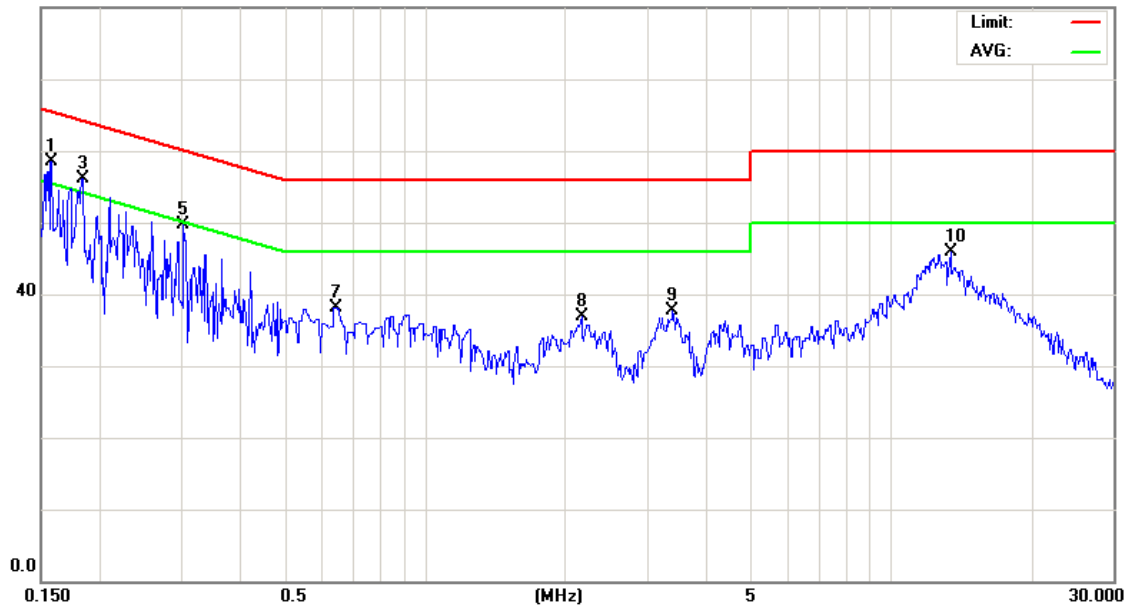

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH01(2412MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1577	48.82	9.73	58.55	65.58	-7.03	peak	
2		0.1577	14.17	9.73	23.90	55.58	-31.68	AVG	
3		0.1836	46.27	9.74	56.01	64.32	-8.31	peak	
4		0.1836	16.20	9.74	25.94	54.32	-28.38	AVG	
5		0.3032	39.98	9.77	49.75	60.15	-10.40	peak	
6		0.3032	14.83	9.77	24.60	50.15	-25.55	AVG	
7		0.6440	28.38	9.79	38.17	56.00	-17.83	peak	
8		2.1649	26.99	9.88	36.87	56.00	-19.13	peak	
9		3.3979	27.77	9.94	37.71	56.00	-18.29	peak	
10		13.4000	35.65	10.20	45.85	60.00	-14.15	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)

Data :#3

Date: 2008/11/24

Time: 下午 08:12:53

80.0 dBuV

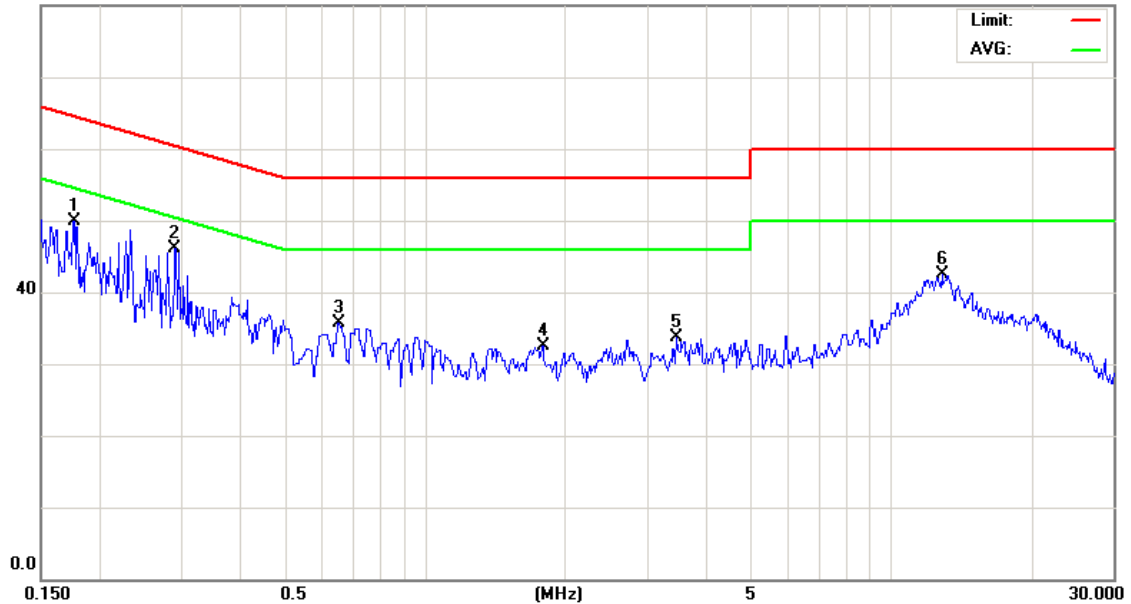

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH06(2437MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1759	40.26	9.74	50.00	64.67	-14.67	peak	
2	*	0.2906	36.33	9.76	46.09	60.50	-14.41	peak	
3		0.6530	25.89	9.79	35.68	56.00	-20.32	peak	
4		1.7869	22.70	9.82	32.52	56.00	-23.48	peak	
5		3.4609	23.66	9.95	33.61	56.00	-22.39	peak	
6		12.8500	32.26	10.18	42.44	60.00	-17.56	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#4

Date: 2008/11/24

Time: 下午 08:11:13

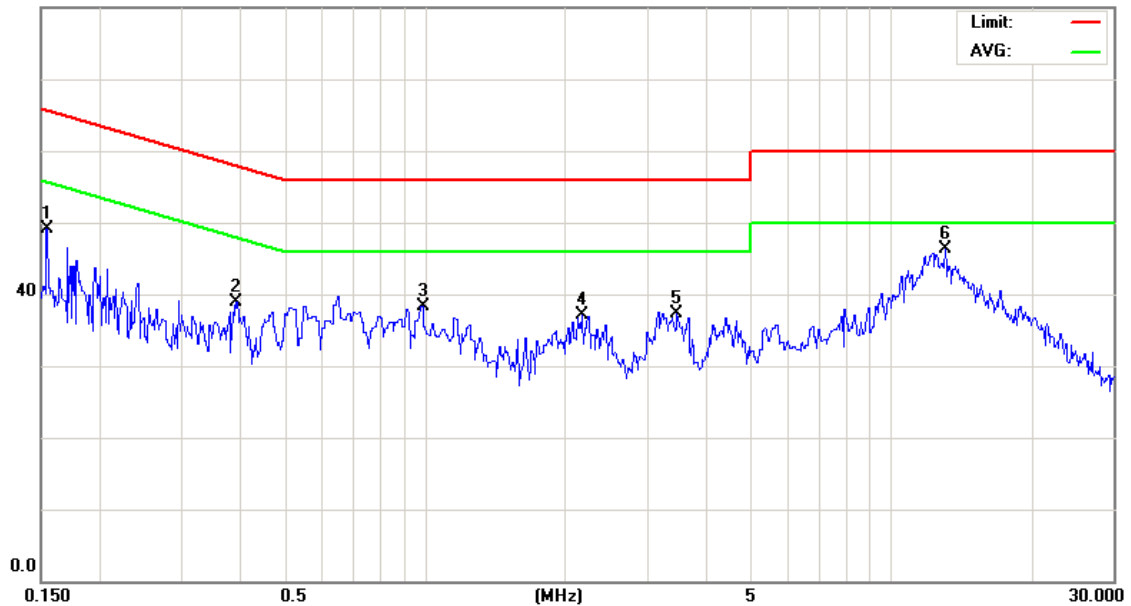

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH06(2437MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1542	39.41	9.73	49.14	65.77	-16.63	peak	
2		0.3929	29.07	9.78	38.85	58.00	-19.15	peak	
3		0.9860	28.56	9.81	38.37	56.00	-17.63	peak	
4		2.1650	27.13	9.88	37.01	56.00	-18.99	peak	
5		3.4700	27.32	9.95	37.27	56.00	-18.73	peak	
6	*	13.0500	36.05	10.19	46.24	60.00	-13.76	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#5

Date: 2008/11/24

Time: 下午 08:27:36

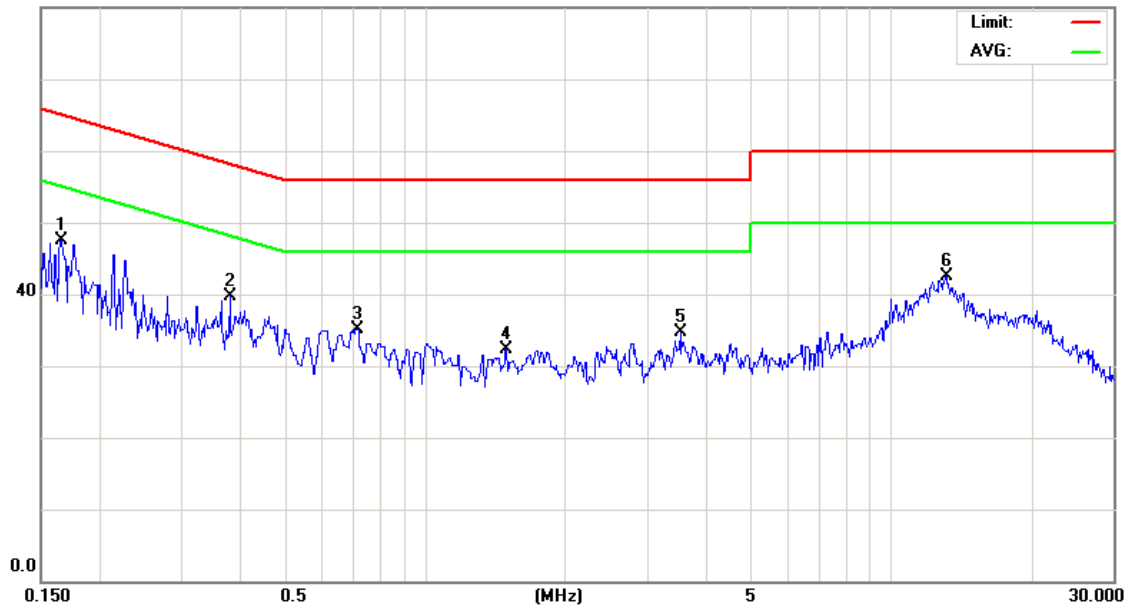

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH11(2462MHz)

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1654	37.79	9.73	47.52	65.18	-17.66	peak	
2	0.3809	29.87	9.78	39.65	58.26	-18.61	peak	
3	0.7160	25.28	9.80	35.08	56.00	-20.92	peak	
4	1.4900	22.40	9.81	32.21	56.00	-23.79	peak	
5	3.5239	24.81	9.94	34.75	56.00	-21.25	peak	
6 *	13.1000	32.38	10.19	42.57	60.00	-17.43	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#6

Date: 2008/11/24

Time: 下午 08:29:36

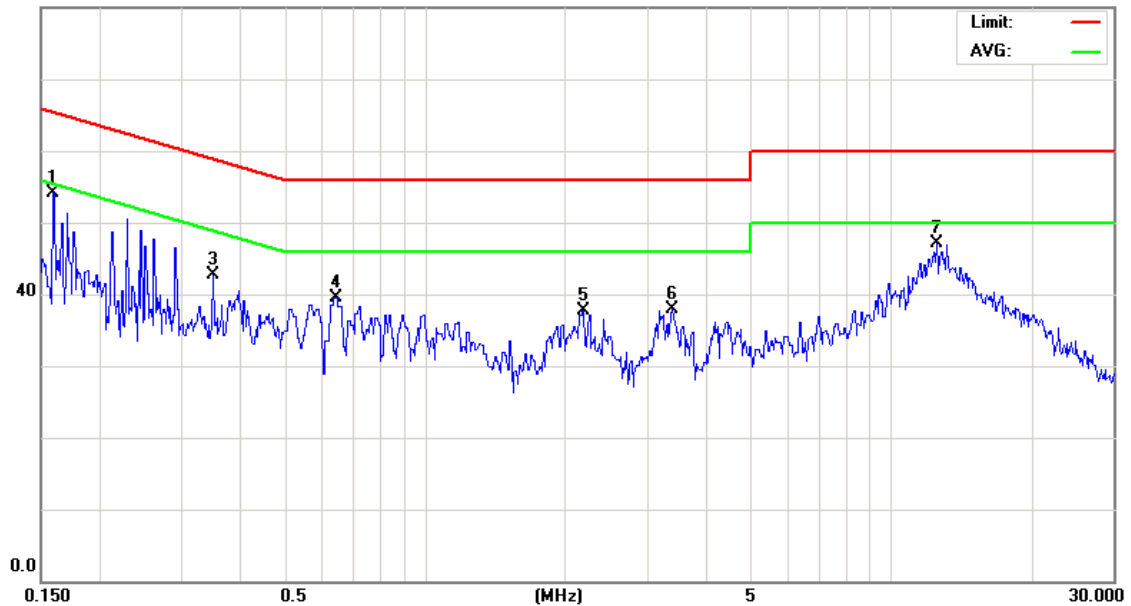

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: CH11(2462MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1590	44.44	9.73	54.17	65.51	-11.34	peak	
2		0.1590	14.37	9.73	24.10	55.51	-31.41	AVG	
3		0.3508	32.83	9.78	42.61	58.94	-16.33	peak	
4		0.6440	29.70	9.79	39.49	56.00	-16.51	peak	
5		2.1829	27.91	9.88	37.79	56.00	-18.21	peak	
6		3.3979	27.91	9.94	37.85	56.00	-18.15	peak	
7		12.5000	36.98	10.17	47.15	60.00	-12.85	peak	
8		12.5000	18.43	10.17	28.60	50.00	-21.40	AVG	

*:Maximum data x:Over limit !:over margin

●Reference Only



2.6.3 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ WLAN 802.11g Link Mode
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#1

Date: 2008/11/24

Time: 下午 09:02:51

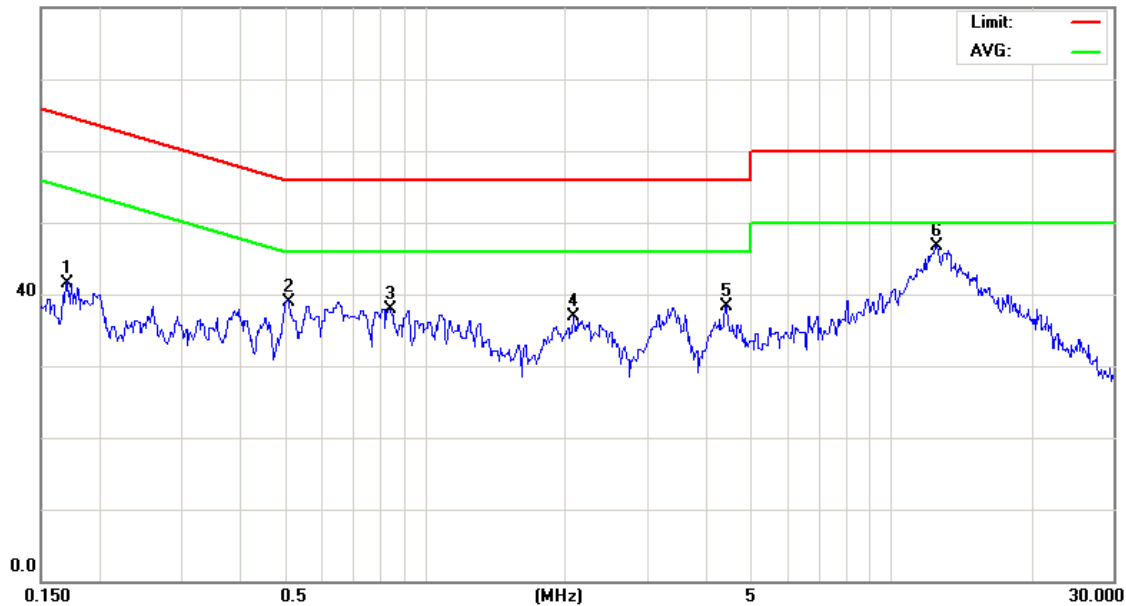

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH01(2412MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1696	31.87	9.73	41.60	64.98	-23.38	peak	
2		0.5090	29.21	9.79	39.00	56.00	-17.00	peak	
3		0.8420	28.03	9.80	37.83	56.00	-18.17	peak	
4		2.0749	26.98	9.86	36.84	56.00	-19.16	peak	
5		4.4149	28.28	10.02	38.30	56.00	-17.70	peak	
6	*	12.4500	36.51	10.16	46.67	60.00	-13.33	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#2

Date: 2008/11/24

Time: 下午 09:08:49

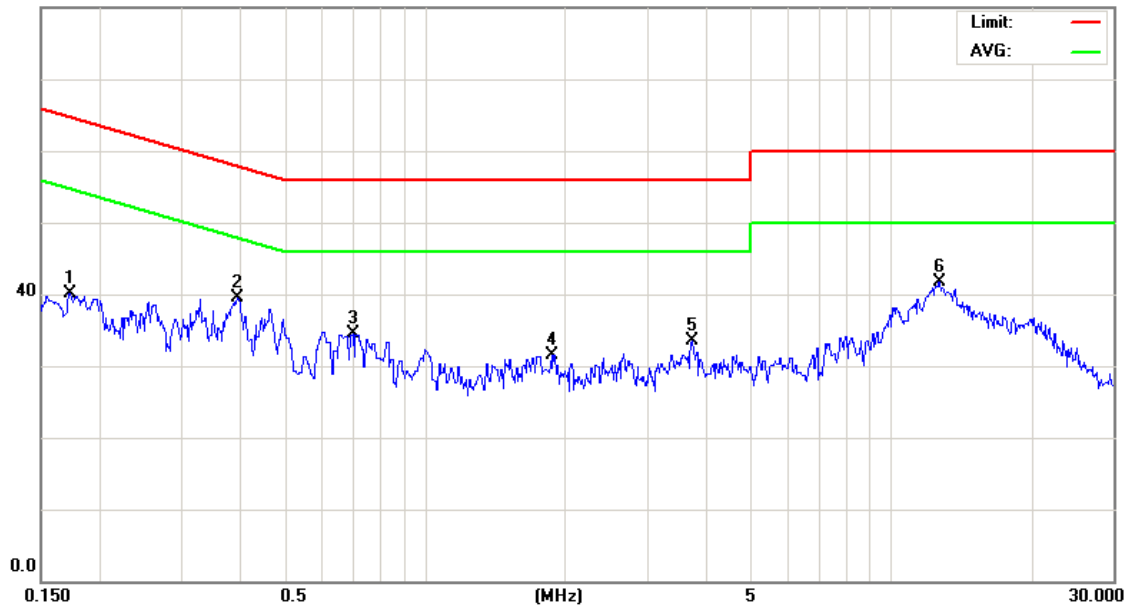

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH01(2412MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1724	30.34	9.73	40.07	64.84	-24.77	peak	
2		0.3942	29.72	9.78	39.50	57.97	-18.47	peak	
3		0.6980	24.62	9.79	34.41	56.00	-21.59	peak	
4		1.8679	21.63	9.82	31.45	56.00	-24.55	peak	
5		3.7309	23.52	9.95	33.47	56.00	-22.53	peak	
6	*	12.6500	31.46	10.17	41.63	60.00	-18.37	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#3

Date: 2008/11/24

Time: 下午 09:19:33

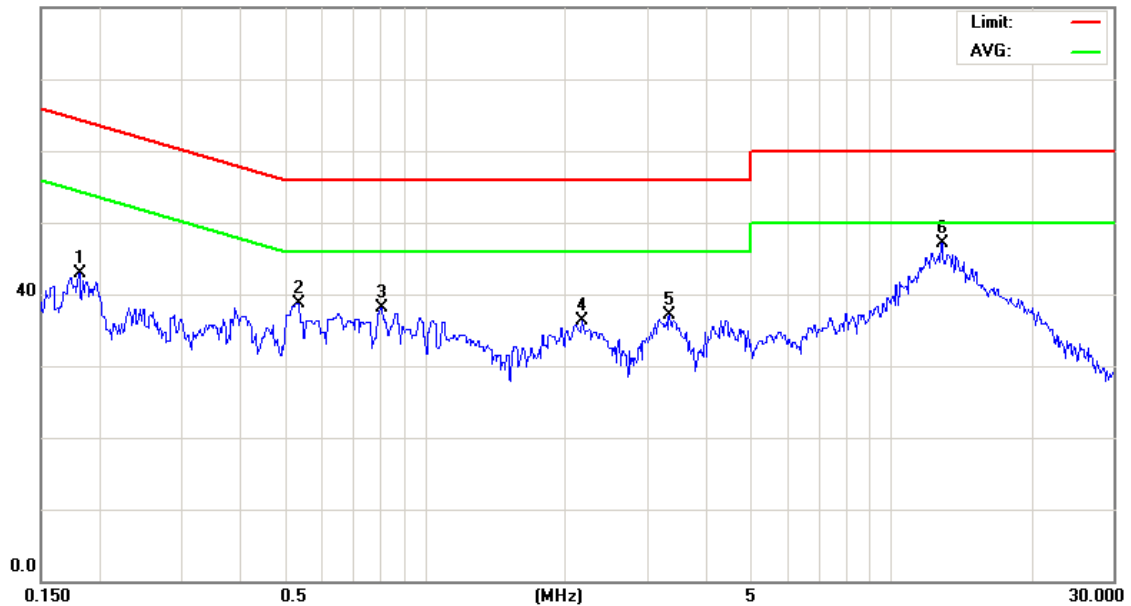

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH06(2437MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1808	33.15	9.74	42.89	64.44	-21.55	peak	
2		0.5360	28.93	9.79	38.72	56.00	-17.28	peak	
3		0.8059	28.30	9.80	38.10	56.00	-17.90	peak	
4		2.1649	26.40	9.88	36.28	56.00	-19.72	peak	
5		3.3439	27.12	9.94	37.06	56.00	-18.94	peak	
6	*	12.8000	36.96	10.18	47.14	60.00	-12.86	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#4

Date: 2008/11/24

Time: 下午 09:21:06

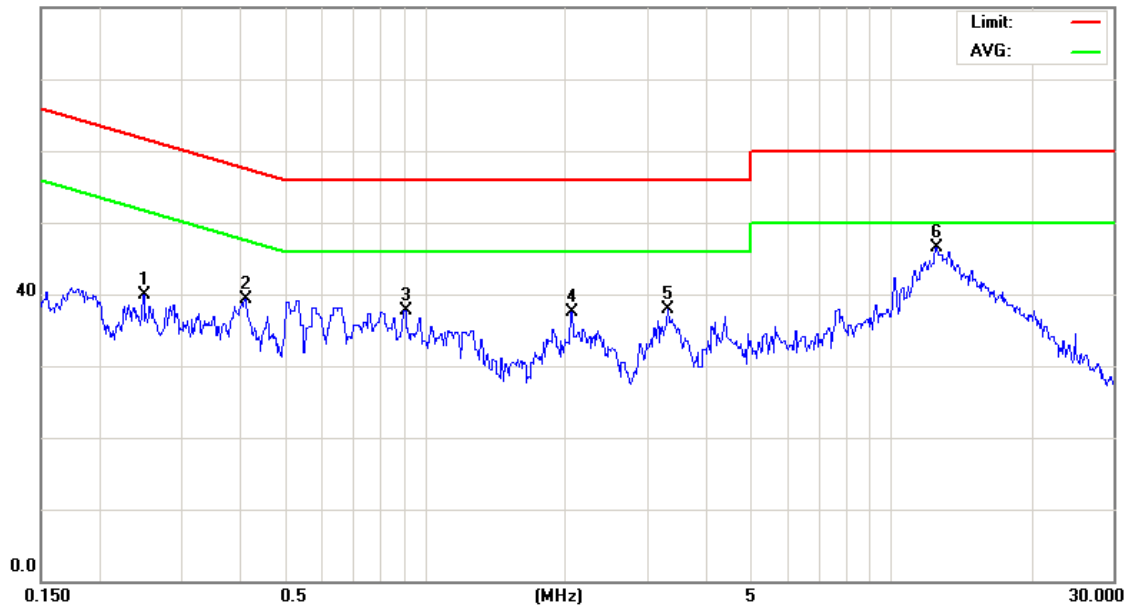

Site site#1

Phase: L2

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH06(2437MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2487	30.08	9.75	39.83	61.80	-21.97	peak	
2		0.4110	29.51	9.78	39.29	57.63	-18.34	peak	
3		0.9050	27.81	9.81	37.62	56.00	-18.38	peak	
4		2.0569	27.70	9.86	37.56	56.00	-18.44	peak	
5		3.3169	27.89	9.93	37.82	56.00	-18.18	peak	
6	*	12.4500	36.42	10.16	46.58	60.00	-13.42	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#5

Date: 2008/11/24

Time: 下午 09:44:01

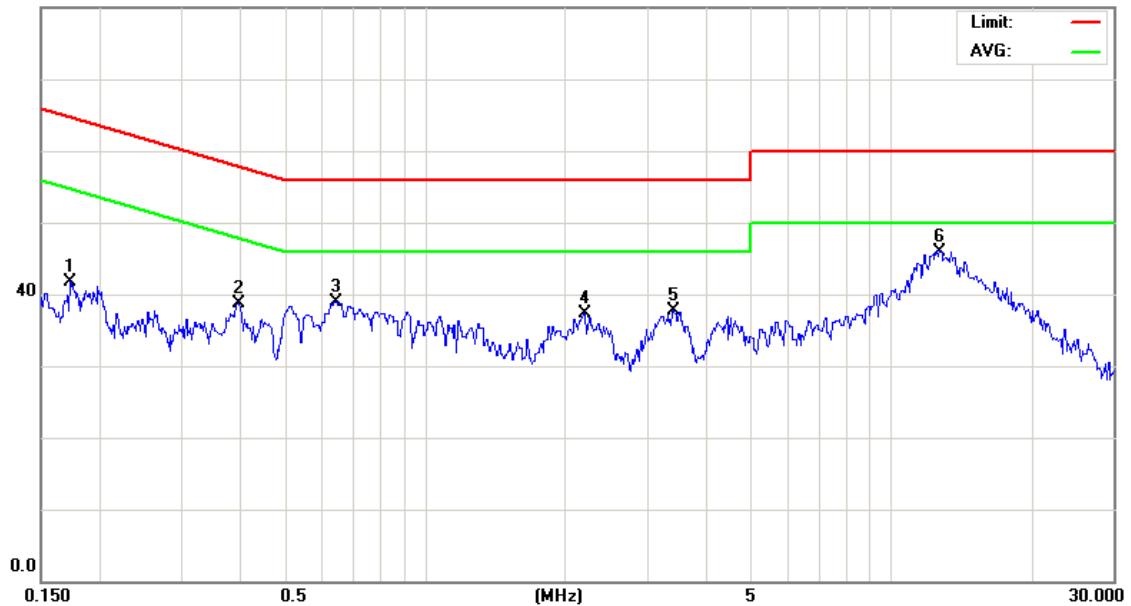

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH11(2462MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1731	31.98	9.73	41.71	64.81	-23.10	peak	
2		0.3956	28.95	9.78	38.73	57.94	-19.21	peak	
3		0.6440	29.17	9.79	38.96	56.00	-17.04	peak	
4		2.1919	27.52	9.88	37.40	56.00	-18.60	peak	
5		3.4069	27.70	9.95	37.65	56.00	-18.35	peak	
6	*	12.7000	35.82	10.18	46.00	60.00	-14.00	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(WIFI)
80.0 dBuV

Data :#6

Date: 2008/11/24

Time: 下午 09:46:39

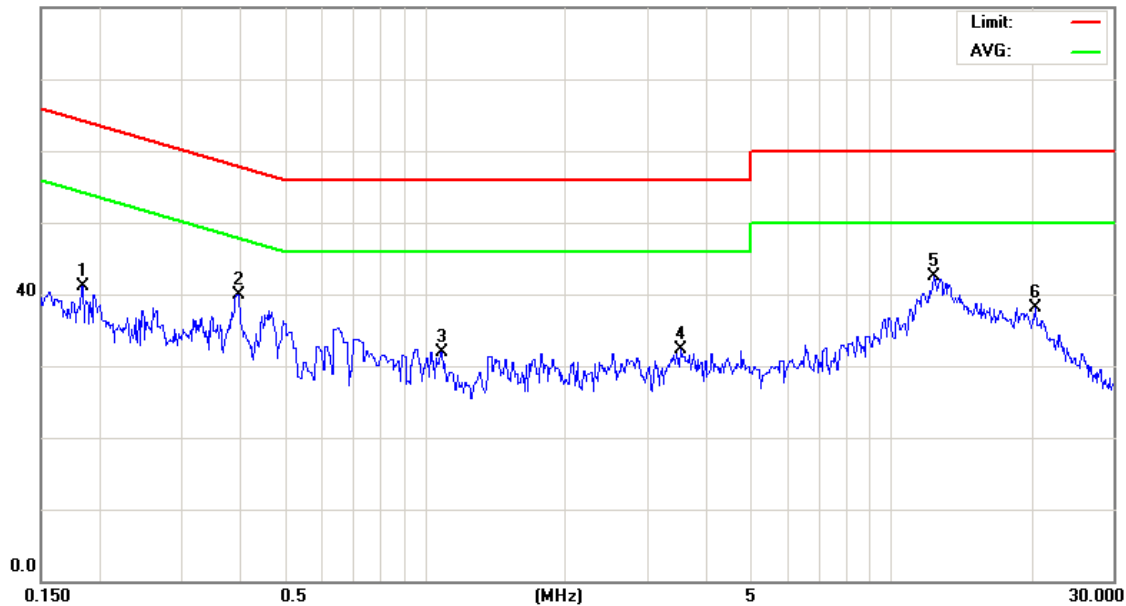

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: CH11(2462MHz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1836	31.39	9.74	41.13	64.32	-23.19	peak	
2		0.3984	30.07	9.78	39.85	57.89	-18.04	peak	
3		1.0849	22.08	9.80	31.88	56.00	-24.12	peak	
4		3.5329	22.30	9.94	32.24	56.00	-23.76	peak	
5	*	12.3500	32.43	10.15	42.58	60.00	-17.42	peak	
6		20.3500	27.82	10.36	38.18	60.00	-21.82	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only



2.6.4 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link _ Stand by
Test Date : 04/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Raymond 103(IDEL)

Data :#1

Date: 2008/4/24

Time:

80.0 dBuV

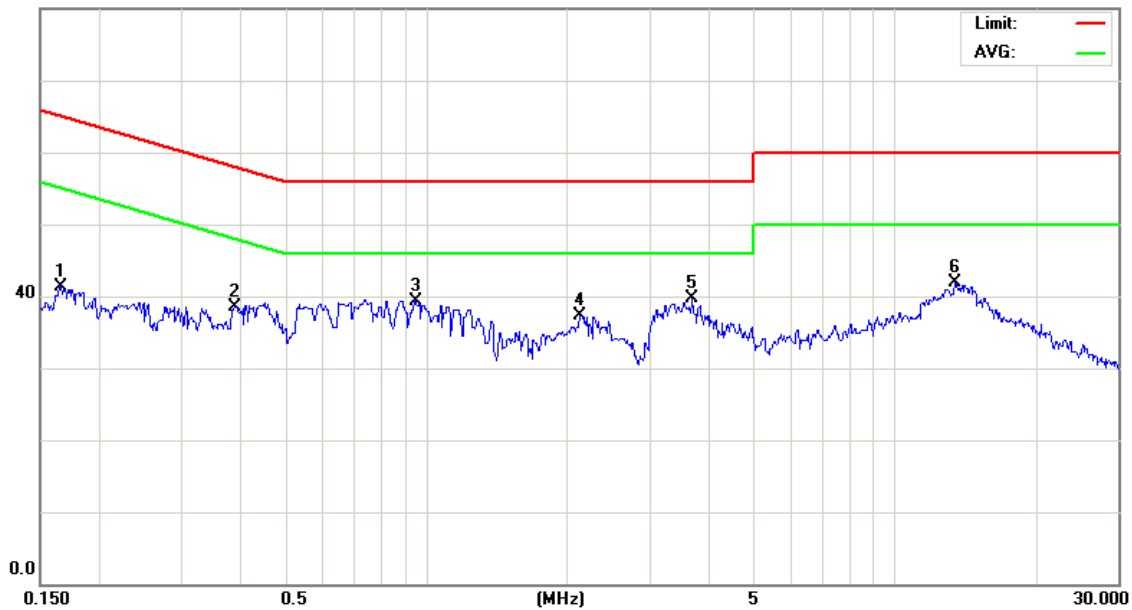

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: IDEL

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1652	31.63	9.73	41.36	65.19	-23.83	peak	
2		0.3905	28.79	9.78	38.57	58.05	-19.48	peak	
3		0.9500	29.48	9.81	39.29	56.00	-16.71	peak	
4		2.1288	27.48	9.88	37.36	56.00	-18.64	peak	
5	*	3.6949	29.79	9.94	39.73	56.00	-16.27	peak	
6		13.4500	31.61	10.21	41.82	60.00	-18.18	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(IDEL)

Data :#2

Date: 2008/4/24

Time:

80.0 dBuV

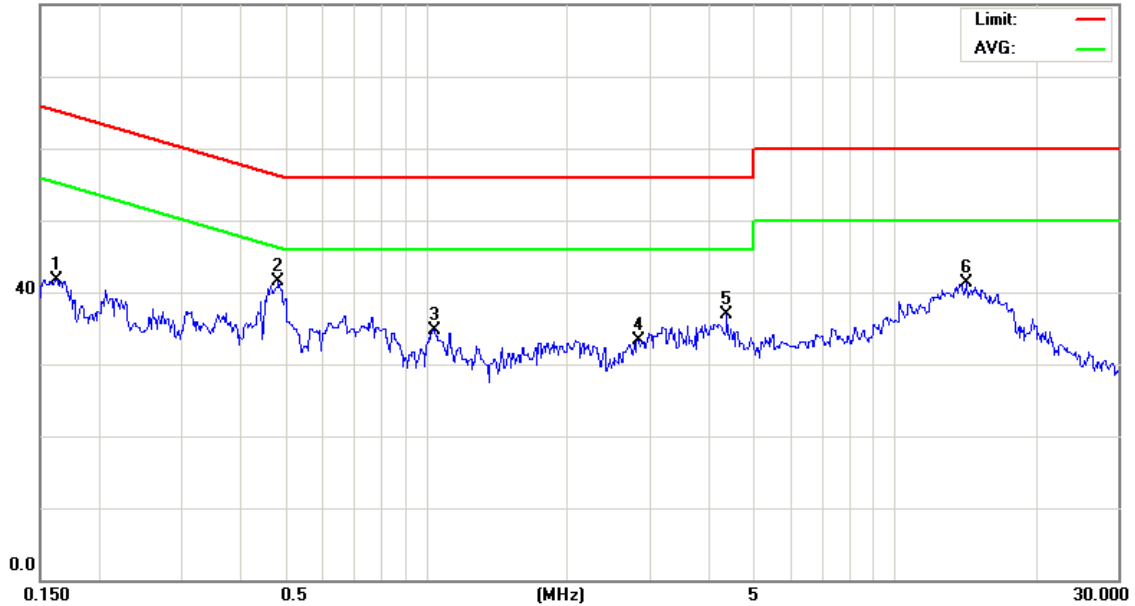

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: IDEL

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1617	32.00	9.73	41.73	65.37	-23.64	peak	
2	*	0.4817	31.71	9.78	41.49	56.31	-14.82	peak	
3		1.0400	24.83	9.80	34.63	56.00	-21.37	peak	
4		2.8308	23.34	9.91	33.25	56.00	-22.75	peak	
5		4.3788	26.98	10.01	36.99	56.00	-19.01	peak	
6		14.2000	31.03	10.20	41.23	60.00	-18.77	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only



2.6.5 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link _ WLAN 802.11b Link Mode
Test Date : 04/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Raymond 103(11b)

Data :#1

Date: 2008/4/24

Time:

80.0 dBuV

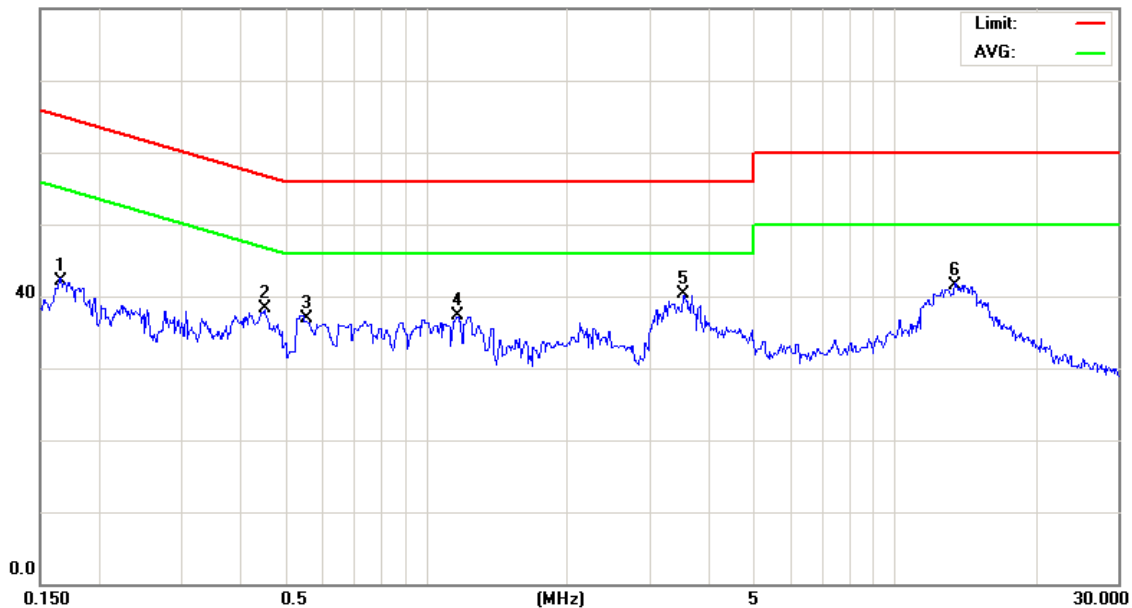

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: 11b

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1652	32.40	9.73	42.13	65.19	-23.06	peak	
2		0.4501	28.47	9.78	38.25	56.87	-18.62	peak	
3		0.5540	27.14	9.79	36.93	56.00	-19.07	peak	
4		1.1655	27.46	9.80	37.26	56.00	-18.74	peak	
5	*	3.5419	30.35	9.94	40.29	56.00	-15.71	peak	
6		13.4500	31.26	10.21	41.47	60.00	-18.53	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11b)

Data :#2

Date: 2008/4/24

Time:

80.0 dBuV

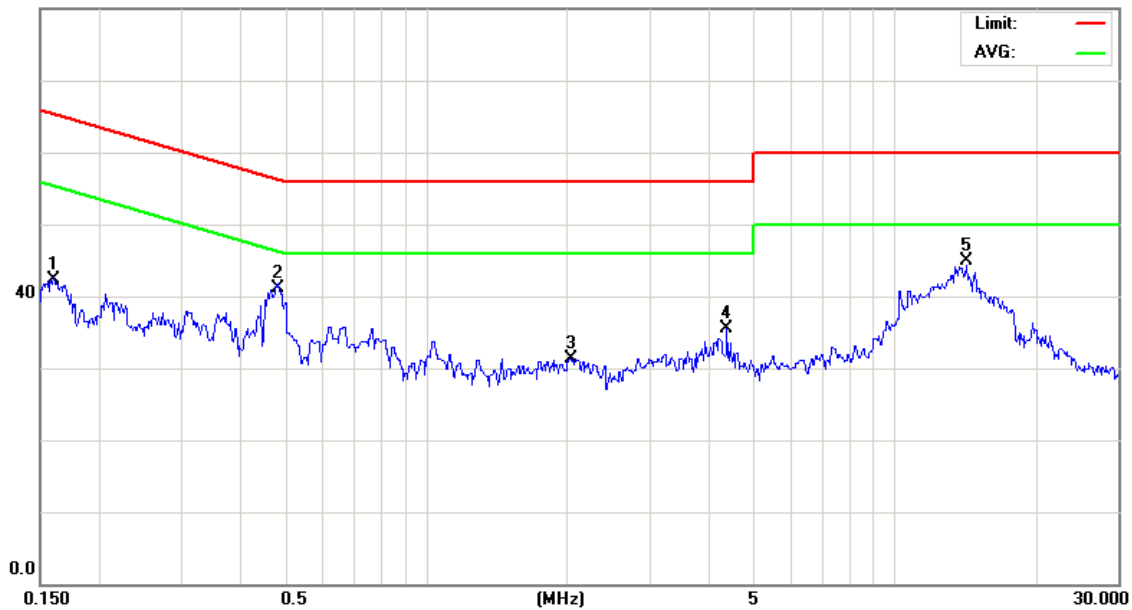

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: 11b

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1597	32.63	9.73	42.36	65.47	-23.11	peak	
2		0.4788	31.35	9.78	41.13	56.36	-15.23	peak	
3		2.0300	21.41	9.86	31.27	56.00	-24.73	peak	
4		4.3788	25.52	10.01	35.53	56.00	-20.47	peak	
5	*	14.2000	34.72	10.20	44.92	60.00	-15.08	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only



2.6.6 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link _ WLAN 802.11g Link Mode
Test Date : 04/24/2008

Please refer to next pager of detail testing data.

Notes:

1. L1: One end & Ground L2: The other end & Ground
2. Height of table on which the EUT was placed: 0.8 m.
3. The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
4. The above test results are obtained under the normal condition.




File :Raymond 103(11g)

Data :#1

Date: 2008/4/24

Time:

80.0 dBuV

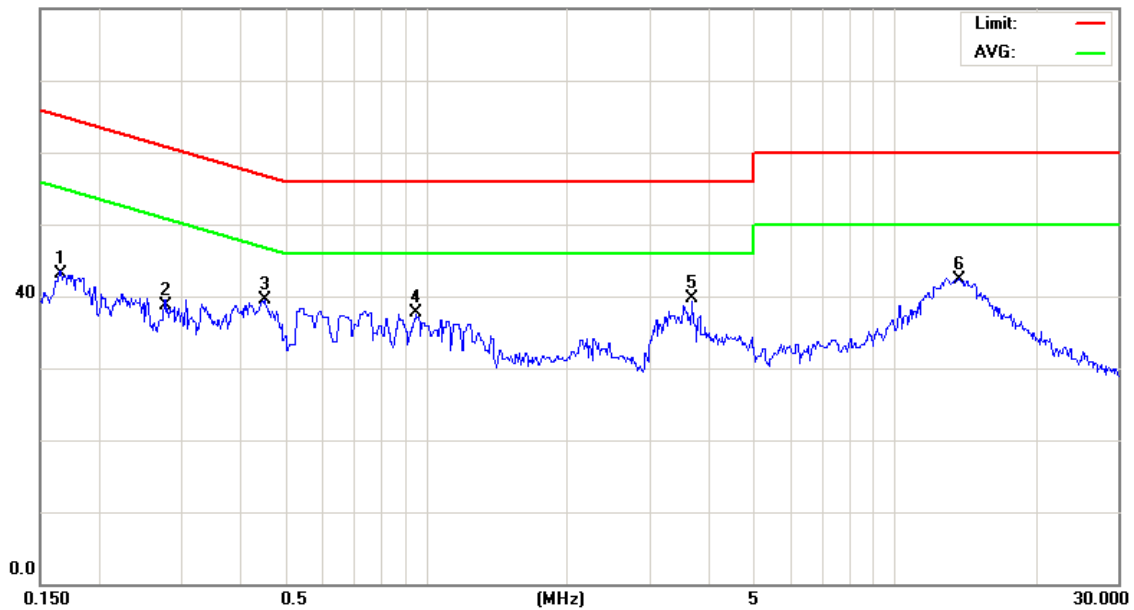

Site site#1

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: 11g

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1652	33.40	9.73	43.13	65.19	-22.06	peak	
2		0.2760	28.98	9.76	38.74	60.93	-22.19	peak	
3		0.4501	29.73	9.78	39.51	56.87	-17.36	peak	
4		0.9500	27.92	9.81	37.73	56.00	-18.27	peak	
5	*	3.6949	29.68	9.94	39.62	56.00	-16.38	peak	
6		13.7000	32.07	10.21	42.28	60.00	-17.72	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11g)

Data :#2

Date: 2008/4/24

Time:

80.0 dBuV

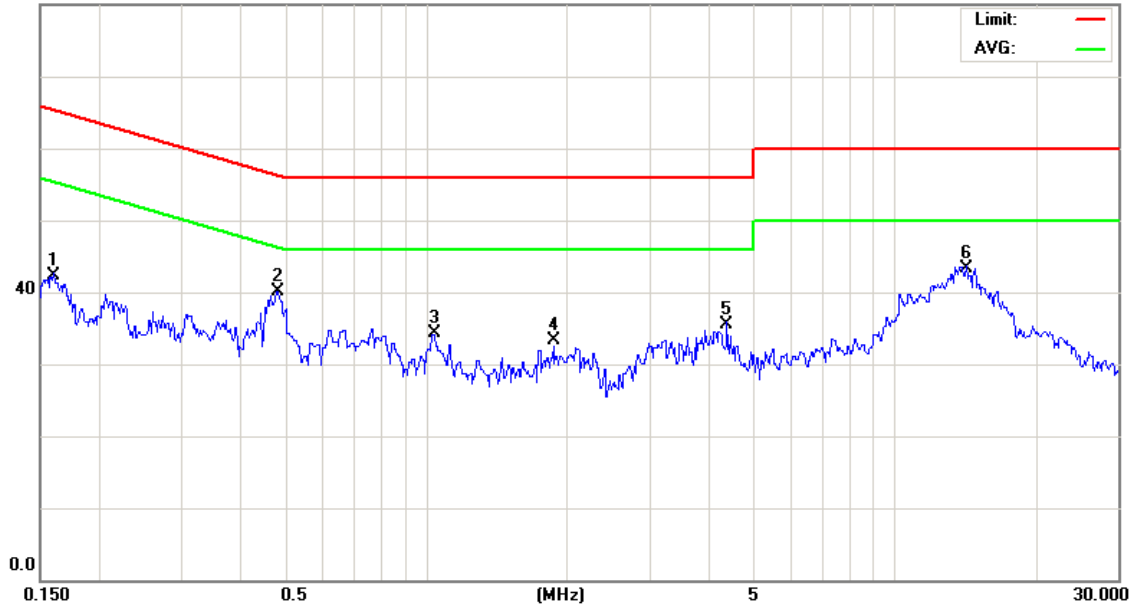

Site site#1

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 110V/60Hz

Humidity: 55 %

EUT:

M/N:

Mode: 11g

Note: PC mode

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1597	32.63	9.73	42.36	65.47	-23.11	peak	
2	*	0.4788	30.41	9.78	40.19	56.36	-16.17	peak	
3		1.0400	24.52	9.80	34.32	56.00	-21.68	peak	
4		1.8675	23.46	9.82	33.28	56.00	-22.72	peak	
5		4.3788	25.51	10.01	35.52	56.00	-20.48	peak	
6		14.2000	33.07	10.20	43.27	60.00	-16.73	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only



3. Radiated Emissions Requirements

3.1 Final radiation measurements were made on a three-meter:

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to working & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 - 26.5 GHz at a distance of 3 or 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).



For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post - detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency :

Transmitter Output < +30dBm

(b) For spurious frequency :

Spurious emission limits = fundamental emission limit /10



3.2 Test Equipment List:

Describe	Manufacturer	Model	Serial Number	Calibration	
				Cal. Date	Due Date
Spectrum Analyzer	Agilent	E4408B	MY45107753	Jun. 05, 2008	Jun. 05, 2009
Pre Amplifier	Agilent	8449B	3008A02237	Jun. 03, 2008	Jun. 03, 2009
Pre Amplifier	Agilent	8447D	2944A10961	Jun. 10, 2008	Jun. 10, 2009
Test Receiver	R&S	ESCI	100367	Jun. 05, 2008	Jun. 05, 2009
Biconilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	Jun. 26, 2008	Jun. 26, 2009
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	Jun. 26, 2008	Jun. 26, 2009
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	Jun. 09, 2008	Jun. 09, 2009
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120E	0899	Jun. 26, 2008	Jun. 26, 2009

3.3 Test Configuration:

AC Adapter Mode



Figure 7. Front View of the Test Configuration



Figure 8. Rear View of the Test Configuration

PC USB Link Mode



Figure 9. Front View of the Test Configuration



Figure 10. Rear View of the Test Configuration



3.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer, and exercised in the most unfavorable manner.

3.5 Radiated Emissions Limits:

Frequency range (MHz)	Peak(dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54



3.6 Measurement Data of Radiated Emissions:

3.6.1 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ IDLE Mode
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Pharos Traveler 117(IDLE

Data :#1

Date: 2008/11/18

Time: 下午 12:27:20

80.0 dBuV

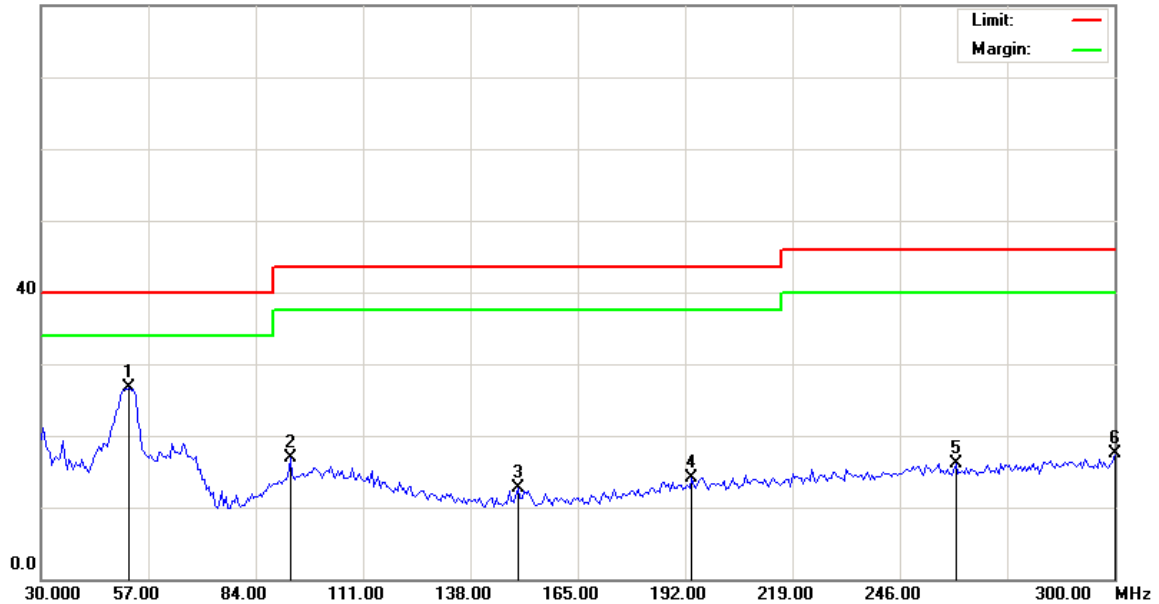

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: IDLE

Note:

2.7G-10G AV Scan

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	52.1400	38.96	-12.18	26.78	40.00	-13.22	peak		
2		92.6400	29.56	-12.57	16.99	43.50	-26.51	peak		
3		149.8800	28.65	-16.01	12.64	43.50	-30.86	peak		
4		193.6200	27.24	-13.17	14.07	43.50	-29.43	peak		
5		260.0400	27.30	-11.24	16.06	46.00	-29.94	peak		
6		300.0000	27.42	-9.98	17.44	46.00	-28.56	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(IDLE

Data :#3

Date: 2008/11/18

Time: 下午 12:35:45

80.0 dBuV

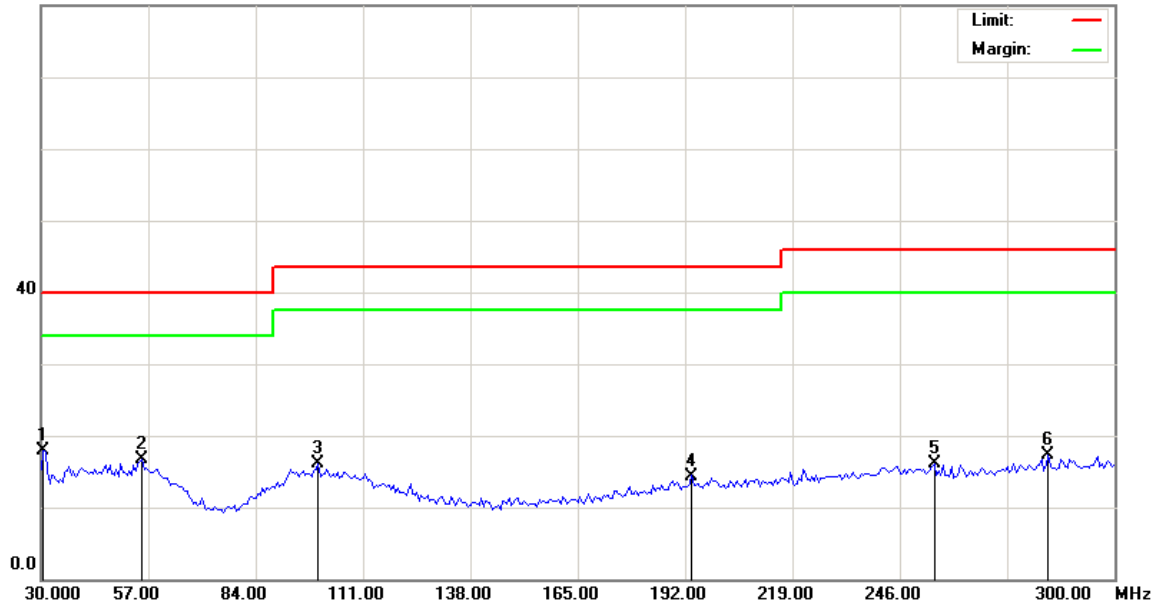

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: IDLE

Note:

2.7G-10G AV Scan

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	30.5400	31.14	-13.31	17.83	40.00	-22.17	peak		
2		55.3800	28.95	-12.24	16.71	40.00	-23.29	peak		
3		99.6600	27.84	-11.78	16.06	43.50	-27.44	peak		
4		193.6200	27.57	-13.17	14.40	43.50	-29.10	peak		
5		254.6400	27.20	-11.13	16.07	46.00	-29.93	peak		
6		283.2600	27.72	-10.34	17.38	46.00	-28.62	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(IDLE

Data :#2

Date: 2008/11/18

Time: 下午 12:31:32

80.0 dBuV

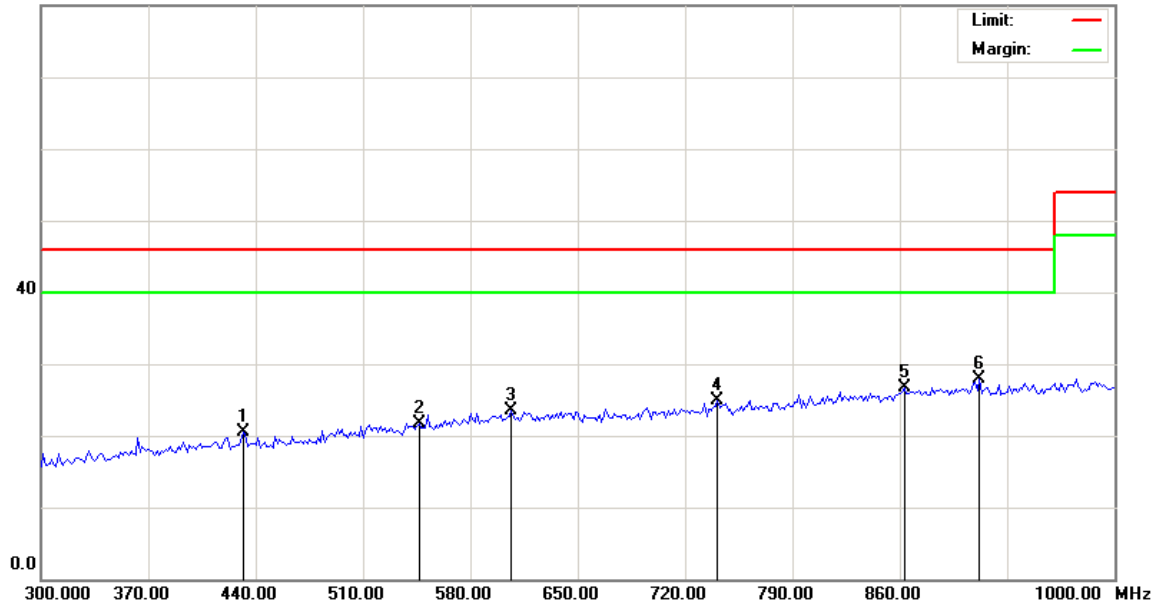

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: IDLE

Note:

2.7G-10G AV Scan

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		431.6000	28.58	-8.03	20.55	46.00	-25.45	peak		
2		546.4000	27.82	-6.04	21.78	46.00	-24.22	peak		
3		606.6000	28.01	-4.60	23.41	46.00	-22.59	peak		
4		741.0000	28.16	-3.25	24.91	46.00	-21.09	peak		
5		862.8000	27.44	-0.74	26.70	46.00	-19.30	peak		
6	*	911.8000	27.97	-0.10	27.87	46.00	-18.13	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(IDLE

Data :#4

Date: 2008/11/18

Time: 下午 12:39:58

80.0 dBuV

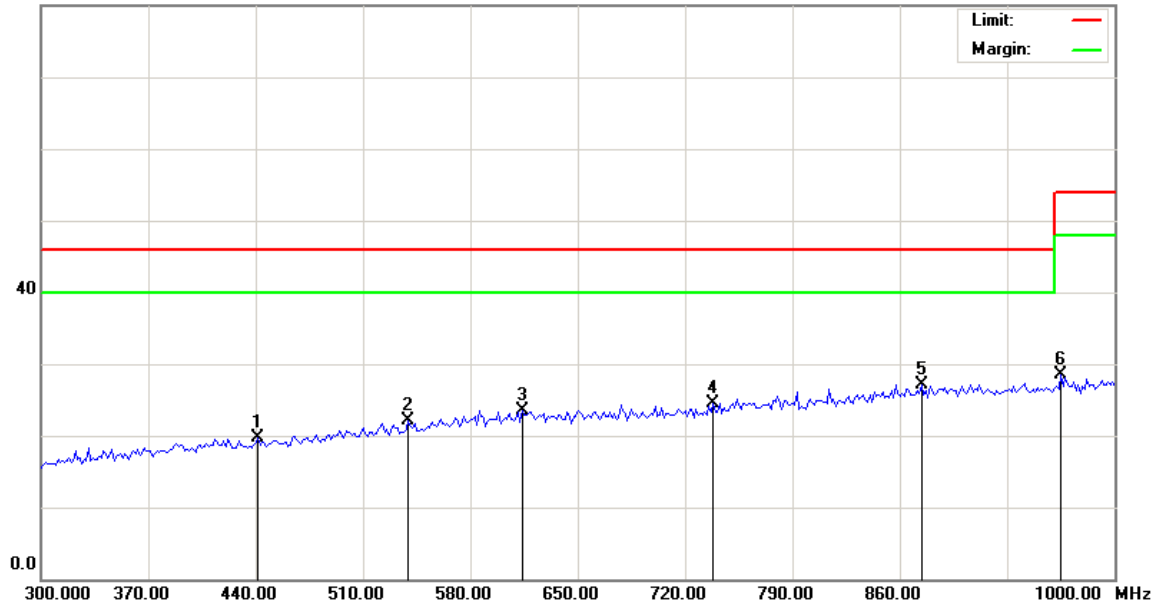

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: IDLE

Note:

2.7G-10G AV Scan

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		441.4000	27.65	-8.01	19.64	46.00	-26.36	peak		
2		539.4000	28.11	-6.08	22.03	46.00	-23.97	peak		
3		613.6000	27.96	-4.46	23.50	46.00	-22.50	peak		
4		738.2000	27.84	-3.28	24.56	46.00	-21.44	peak		
5	*	874.0000	27.91	-0.82	27.09	46.00	-18.91	peak		
6		965.0000	27.89	0.68	28.57	54.00	-25.43	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only



3.6.2 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ WLAN 802.11b Link Mode
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Pharos Traveler 117(11b)

Data :#1

Date: 2008-11-24

Time: 下午 03:37:22

80.0 dBuV

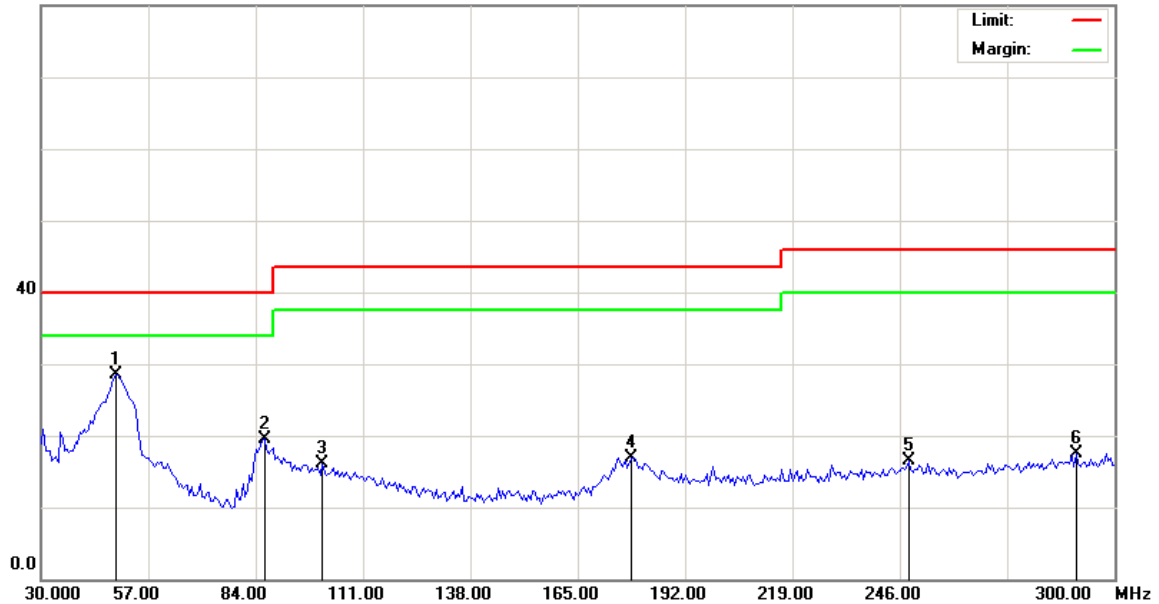

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: ch01(2412MHz) , 14dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree	
							Detector		degree	Comment
1	*	48.9000	40.54	-12.08	28.46	40.00	-11.54	peak		
2		86.1600	33.81	-14.37	19.44	40.00	-20.56	peak		
3		100.7400	27.89	-11.81	16.08	43.50	-27.42	peak		
4		178.5000	31.41	-14.42	16.99	43.50	-26.51	peak		
5		248.1600	27.43	-10.99	16.44	46.00	-29.56	peak		
6		290.2800	27.50	-10.03	17.47	46.00	-28.53	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11b)

Data :#3

Date: 2008-11-24

Time: 下午 03:45:48

80.0 dBuV

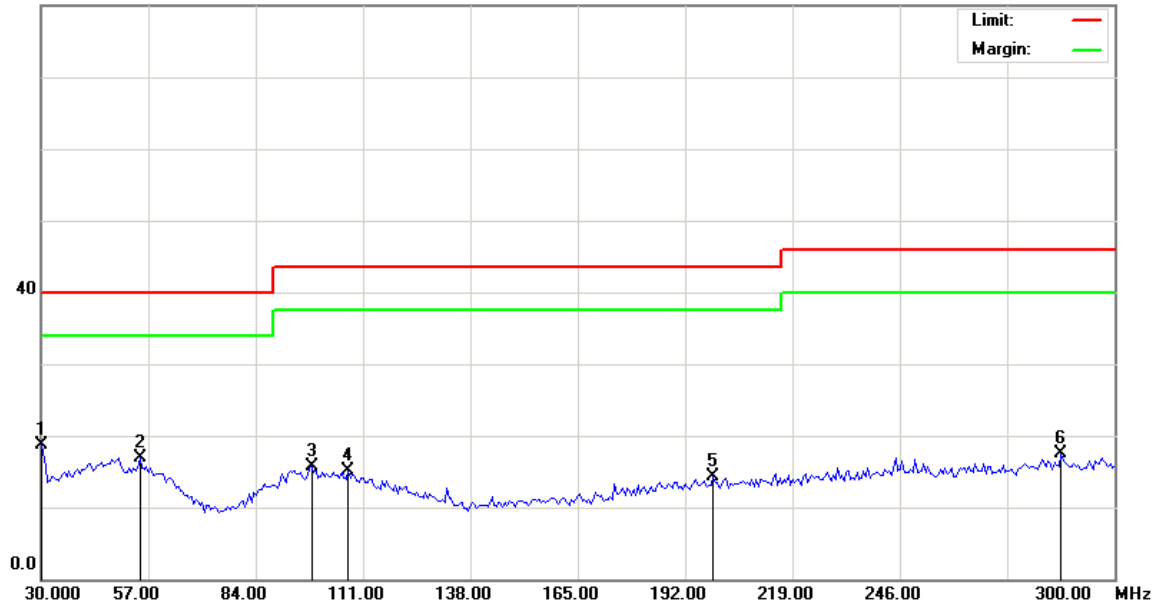

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: ch01(2412MHz) , 14dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	30.0000	32.10	-13.32	18.78	40.00	-21.22	peak		
2		54.8400	29.10	-12.21	16.89	40.00	-23.11	peak		
3		98.0400	27.57	-11.87	15.70	43.50	-27.80	peak		
4		107.2200	27.35	-12.28	15.07	43.50	-28.43	peak		
5		199.0200	27.43	-13.16	14.27	43.50	-29.23	peak		
6		286.5000	27.81	-10.21	17.60	46.00	-28.40	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11b)

Data :#2

Date: 2008-11-24

Time: 下午 03:41:36

80.0 dBuV

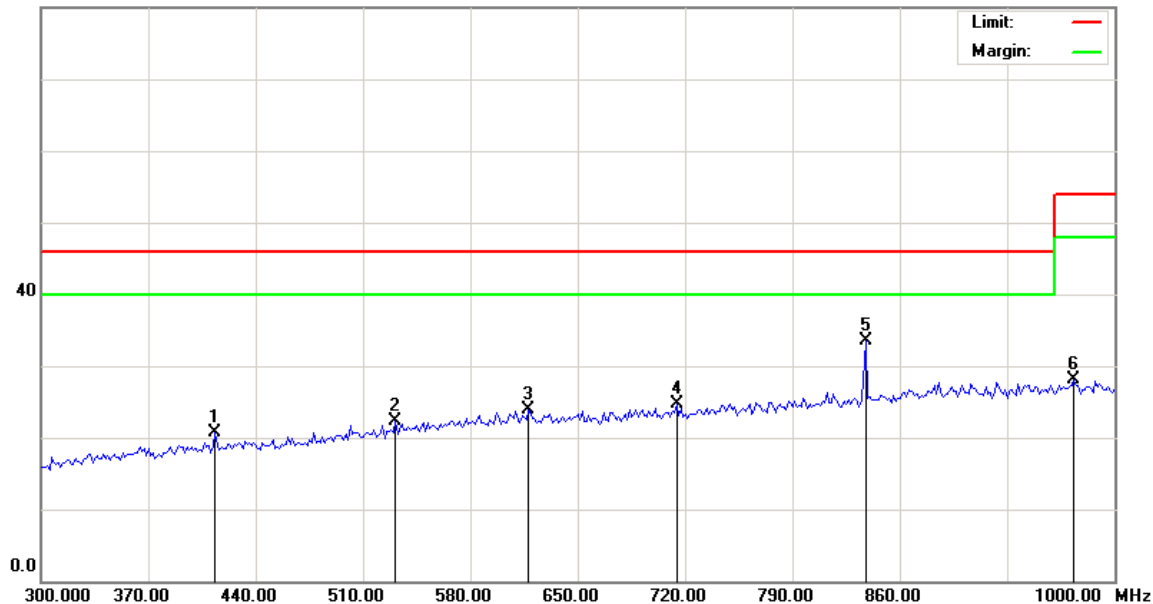

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: ch01(2412MHz) , 14dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		413.4000	29.03	-8.24	20.79	46.00	-25.21	peak		
2		531.0000	28.54	-6.29	22.25	46.00	-23.75	peak		
3		617.8000	28.29	-4.38	23.91	46.00	-22.09	peak		
4		714.4000	28.36	-3.64	24.72	46.00	-21.28	peak		
5	*	837.6000	34.87	-1.40	33.47	46.00	-12.53	peak		SAR link GSM850(ch190)
6		973.4000	27.40	0.68	28.08	54.00	-25.92	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11b)

Data :#4

Date: 2008-11-24

Time: 下午 03:50:02

80.0 dBuV

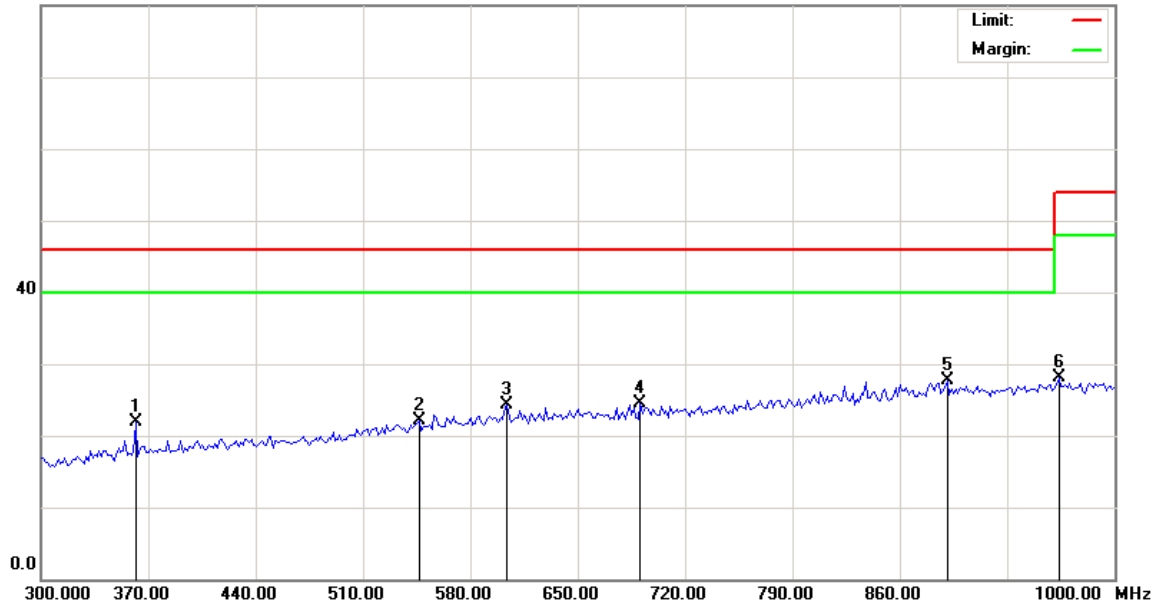

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11b)

Note: ch01(2412MHz) , 14dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		361.6000	30.86	-8.87	21.99	46.00	-24.01	peak		
2		546.4000	28.06	-6.04	22.02	46.00	-23.98	peak		
3		603.8000	28.91	-4.66	24.25	46.00	-21.75	peak		
4		690.6000	28.60	-4.19	24.41	46.00	-21.59	peak		
5	*	890.8000	28.40	-0.79	27.61	46.00	-18.39	peak		
6		963.6000	27.47	0.61	28.08	54.00	-25.92	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only



3.6.3 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : AC Adapter _ WLAN 802.11g Link Mode
Test Date : 11/24/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Pharos Traveler 117(11g)

Data :#1

Date: 2008-11-24

Time: 下午 04:37:25

80.0 dBuV

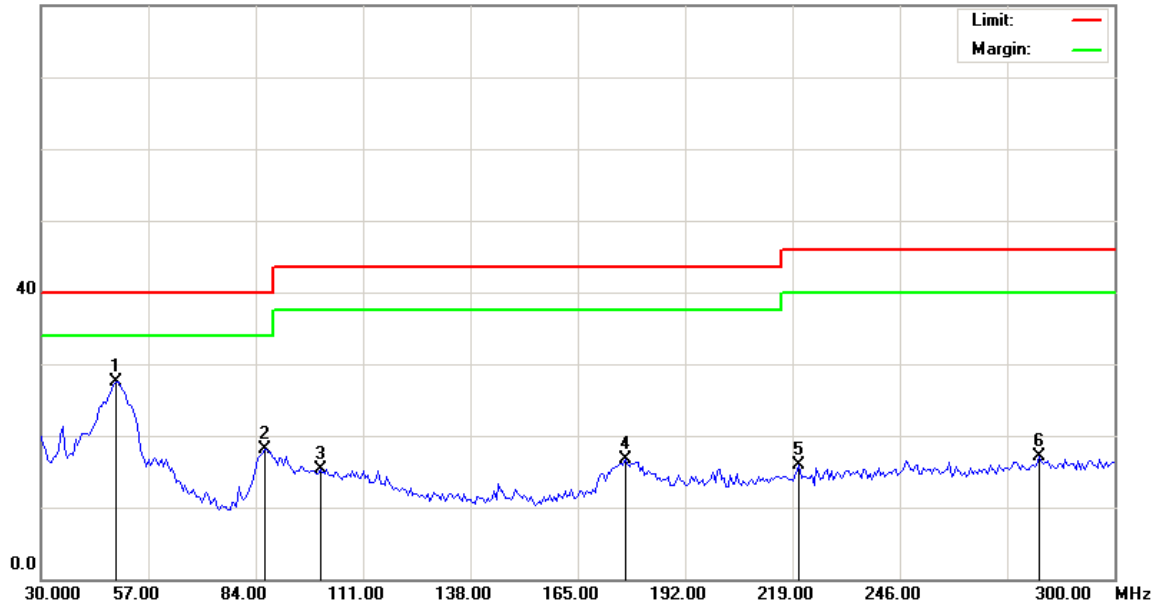

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: ch01(2412MHz) , 12dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree	
							Detector		degree	Comment
1	*	48.9000	39.63	-12.08	27.55	40.00	-12.45	peak		
2		86.1600	32.52	-14.37	18.15	40.00	-21.85	peak		
3		100.2000	27.15	-11.77	15.38	43.50	-28.12	peak		
4		176.8800	31.20	-14.52	16.68	43.50	-26.82	peak		
5		220.6200	28.29	-12.35	15.94	46.00	-30.06	peak		
6		281.1000	27.57	-10.39	17.18	46.00	-28.82	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11g)

Data :#3

Date: 2008-11-24

Time: 下午 04:45:47

80.0 dBuV

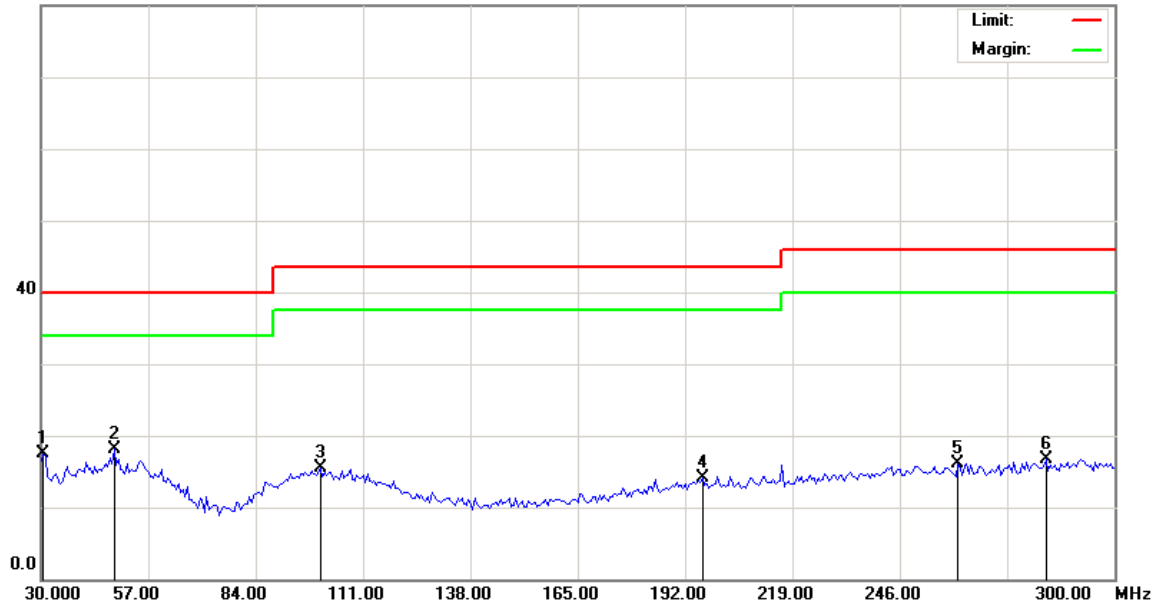

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: ch01(2412MHz) , 12dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		30.5400	30.90	-13.31	17.59	40.00	-22.41	peak		
2	*	48.3600	30.10	-12.05	18.05	40.00	-21.95	peak		
3		100.2000	27.32	-11.77	15.55	43.50	-27.95	peak		
4		196.3200	27.27	-13.11	14.16	43.50	-29.34	peak		
5		260.5799	27.30	-11.21	16.09	46.00	-29.91	peak		
6		282.7200	27.10	-10.35	16.75	46.00	-29.25	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11g)

Data :#2

Date: 2008-11-24

Time: 下午 04:41:36

80.0 dBuV

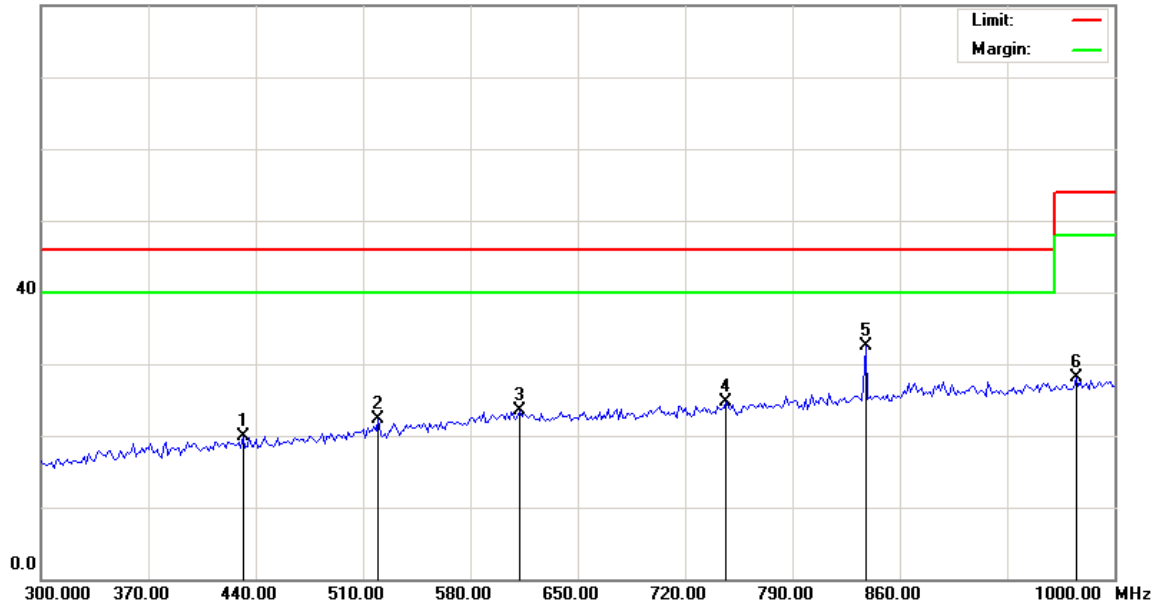

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: ch01(2412MHz) , 12dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		431.6000	27.93	-8.03	19.90	46.00	-26.10	peak		
2		519.8000	28.86	-6.57	22.29	46.00	-23.71	peak		
3		612.2000	28.07	-4.52	23.55	46.00	-22.45	peak		
4		746.6000	27.91	-3.11	24.80	46.00	-21.20	peak		
5	*	837.6000	33.99	-1.40	32.59	46.00	-13.41	peak		SAR link GSM850(ch190)
6		974.8000	27.51	0.65	28.16	54.00	-25.84	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Pharos Traveler 117(11g)

Data :#4

Date: 2008-11-24

Time: 下午 04:50:00

80.0 dBuV

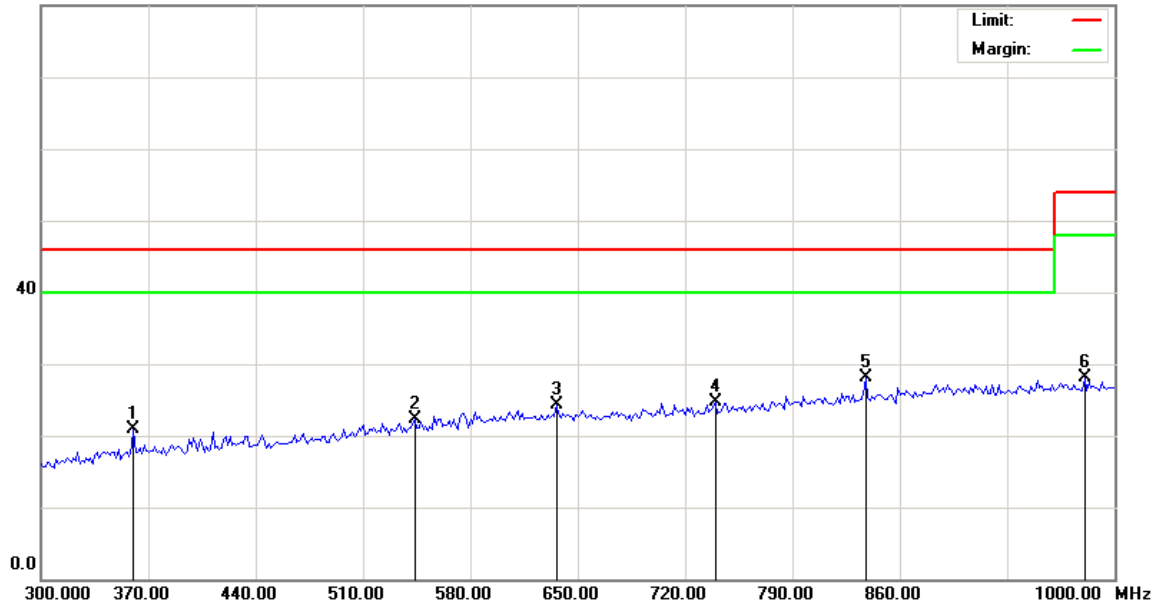

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: 08-0266-SEO

Mode: WIFI(11g)

Note: ch01(2412MHz) , 12dBm

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		360.2000	29.79	-8.98	20.81	46.00	-25.19	peak		
2		543.6000	28.27	-6.05	22.22	46.00	-23.78	peak		
3		636.0000	28.63	-4.38	24.25	46.00	-21.75	peak		
4		739.6000	28.08	-3.29	24.79	46.00	-21.21	peak		
5	*	837.6000	29.57	-1.40	28.17	46.00	-17.83	peak		
6		980.4000	27.66	0.45	28.11	54.00	-25.89	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only



3.6.4 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link_ IDLE Mode
Test Date : 04/22/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Raymond 103(IDEL)

Data :#1

Date: 2008/4/22

Time:

80.0 dBuV

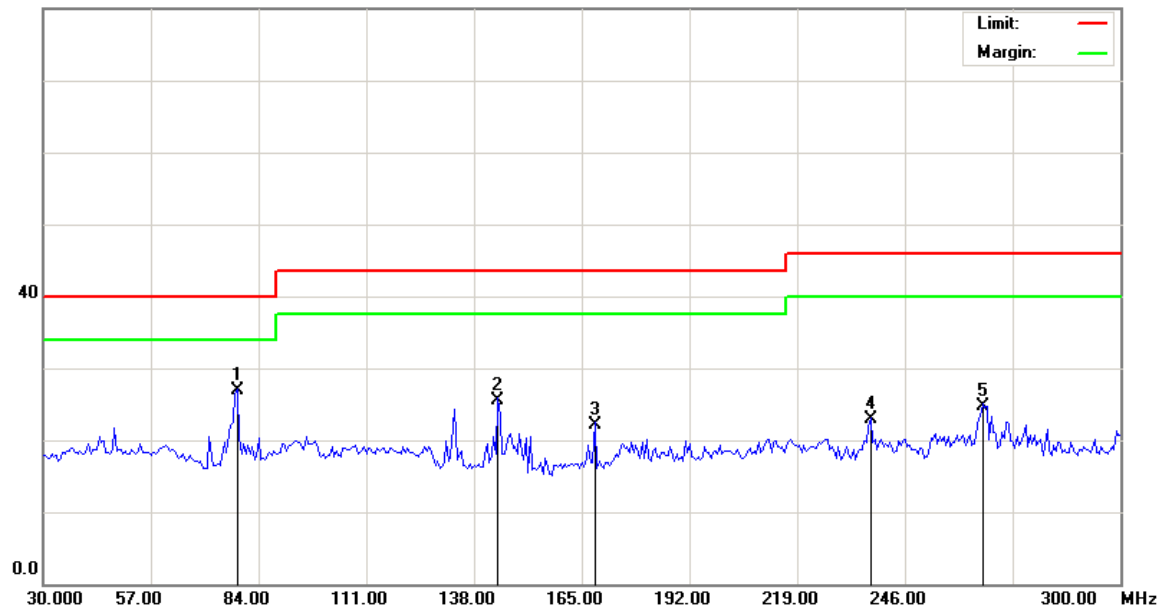

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: IDEL

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	78.6000	43.63	-16.72	26.91	40.00	-13.09	peak		
2		143.9400	41.78	-16.22	25.56	43.50	-17.94	peak		
3		168.2400	37.50	-15.37	22.13	43.50	-21.37	peak		
4		237.3600	34.43	-11.59	22.84	46.00	-23.16	peak		
5		265.4400	35.74	-11.02	24.72	46.00	-21.28	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(IDEL)

Data :#3

Date: 2008/4/22

Time:

80.0 dBuV

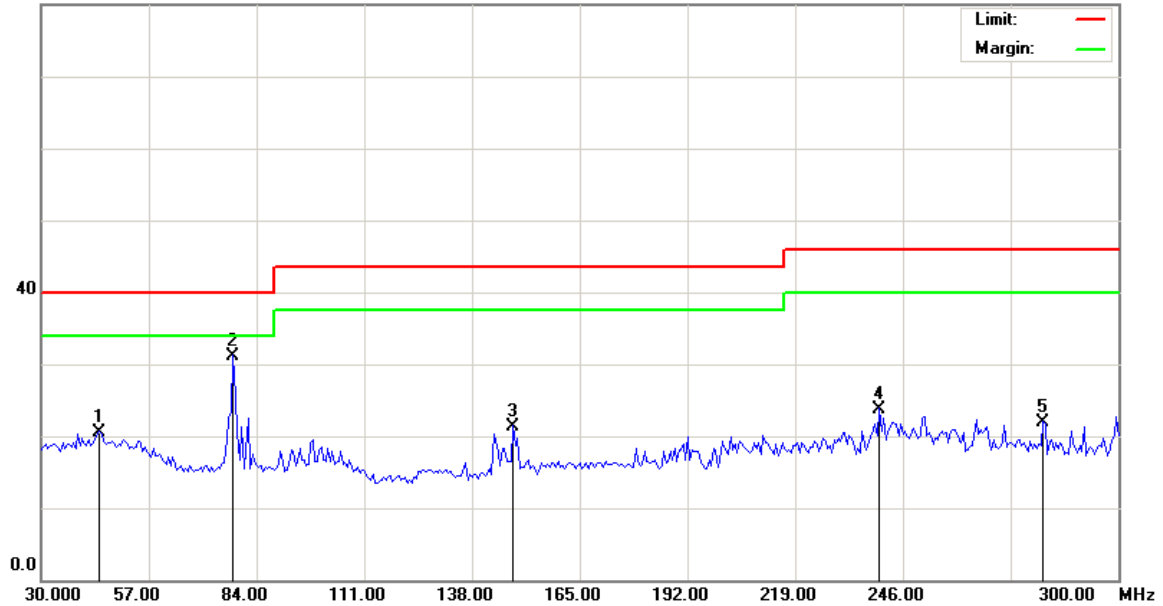

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: IDEL

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		44.5800	32.27	-11.84	20.43	40.00	-19.57	peak		
2	*	78.0600	47.81	-16.79	31.02	40.00	-8.98	peak		
3		148.2600	37.43	-16.07	21.36	43.50	-22.14	peak		
4		240.0600	35.18	-11.43	23.75	46.00	-22.25	peak		
5		281.1000	32.33	-10.39	21.94	46.00	-24.06	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(IDEL)

Data :#2

Date: 2008/4/22

Time:

80.0 dBuV

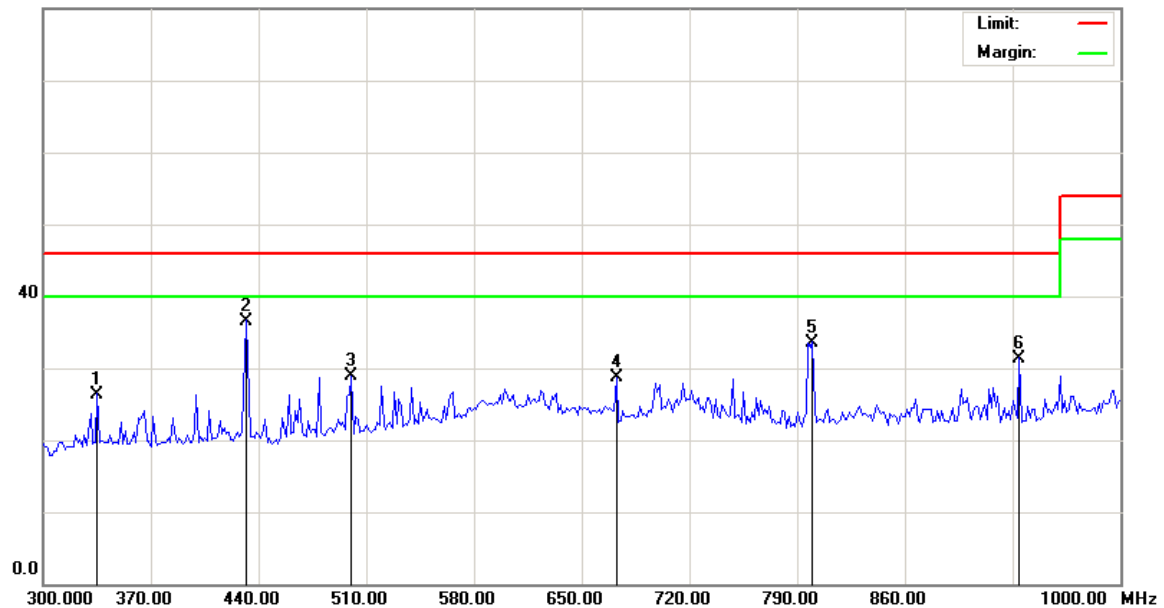

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: IDEL

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1	*	335.0000	35.63	-9.27	26.36	46.00	-19.64	peak		
2	*	431.6000	44.56	-8.03	36.53	46.00	-9.47	peak		
3	*	500.2000	35.99	-7.17	28.82	46.00	-17.18	peak		
4	*	672.4000	32.89	-4.28	28.61	46.00	-17.39	peak		
5	*	799.8000	35.90	-2.32	33.58	46.00	-12.42	peak		
6	*	934.2000	31.38	-0.06	31.32	46.00	-14.68	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(IDEL)

Data :#4

Date: 2008/4/22

Time:

80.0 dBuV

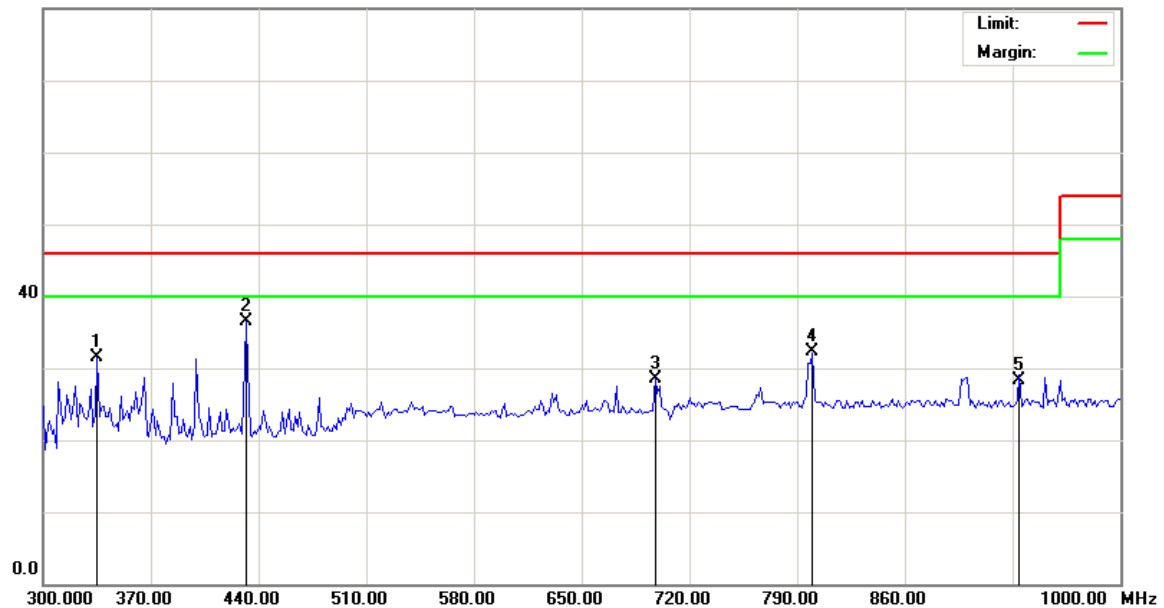

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: IDEL

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		335.0000	40.73	-9.27	31.46	46.00	-14.54	peak		
2	*	431.6000	44.54	-8.03	36.51	46.00	-9.49	peak		
3		697.6000	32.32	-3.86	28.46	46.00	-17.54	peak		
4		799.8000	34.59	-2.32	32.27	46.00	-13.73	peak		
5		934.2000	28.42	-0.06	28.36	46.00	-17.64	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only



3.6.5 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link_ WLAN 802.11b Link Mode
Test Date : 04/22/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Raymond 103(11b)

Data :#1

Date: 2008/4/22

Time:

80.0 dBuV

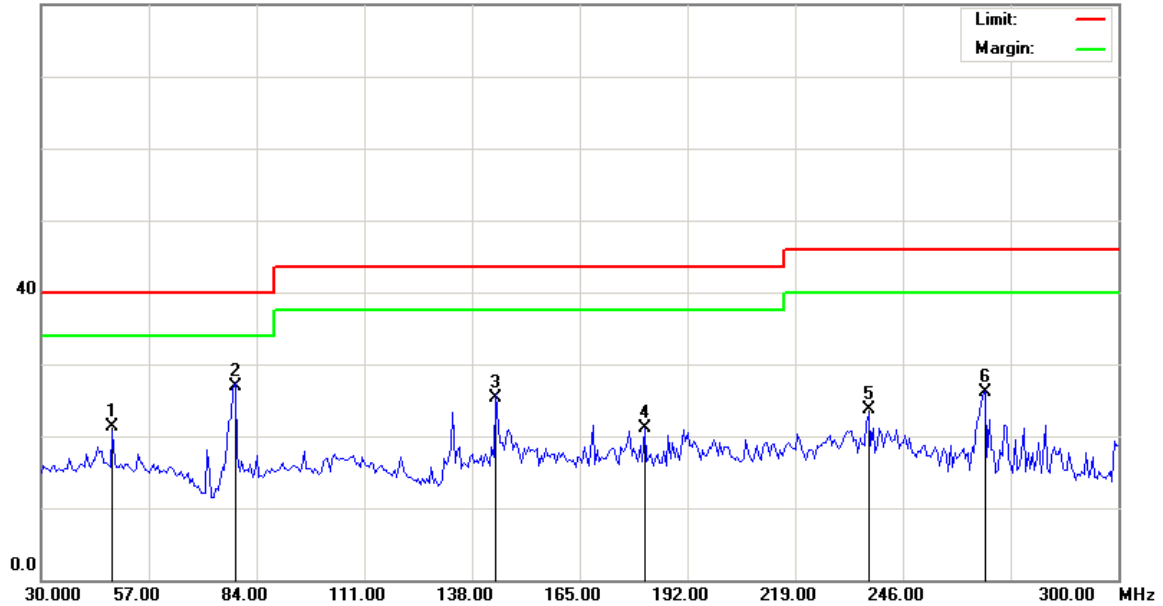

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: Raymond 103

Mode: 11b

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		47.8200	33.29	-12.02	21.27	40.00	-18.73	peak		
2	*	78.6000	43.65	-16.72	26.93	40.00	-13.07	peak		
3		143.9400	41.43	-16.22	25.21	43.50	-18.29	peak		
4		181.2000	35.38	-14.19	21.19	43.50	-22.31	peak		
5		237.3600	35.22	-11.59	23.63	46.00	-22.37	peak		
6		266.5200	37.02	-11.00	26.02	46.00	-19.98	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11b)

Data :#3

Date: 2008/4/22

Time:

80.0 dBuV

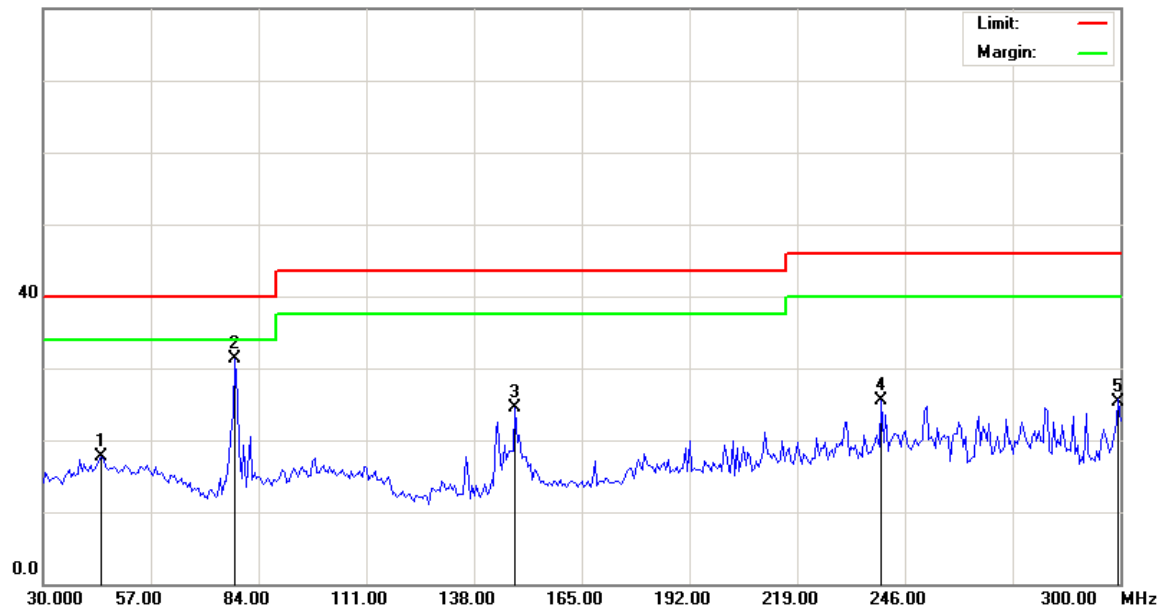

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: Raymond 103

Mode: 11b

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		44.5800	29.45	-11.84	17.61	40.00	-22.39	peak			
2	*	78.0600	48.05	-16.79	31.26	40.00	-8.74	peak			
3		148.2600	40.48	-16.07	24.41	43.50	-19.09	peak			
4		240.0600	36.99	-11.43	25.56	46.00	-20.44	peak			
5		299.4600	35.28	-10.00	25.28	46.00	-20.72	peak			

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11b)

Data :#2

Date: 2008/4/22

Time:

80.0 dBuV

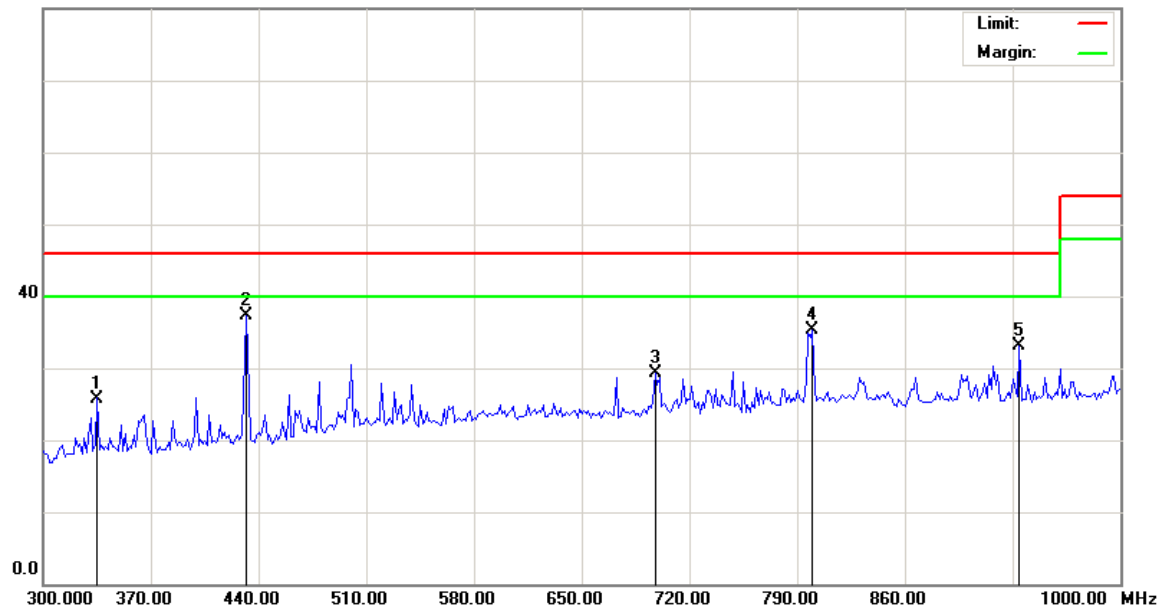

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: Raymond 103

Mode: 11b

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		335.0000	34.96	-9.27	25.69	46.00	-20.31	peak		
2	*	431.6000	45.37	-8.03	37.34	46.00	-8.66	peak		
3		697.6000	33.14	-3.86	29.28	46.00	-16.72	peak		
4		799.8000	37.63	-2.32	35.31	46.00	-10.69	peak		
5		934.2000	33.25	-0.06	33.19	46.00	-12.81	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11b)

Data :#4

Date: 2008/4/22

Time:

80.0 dBuV

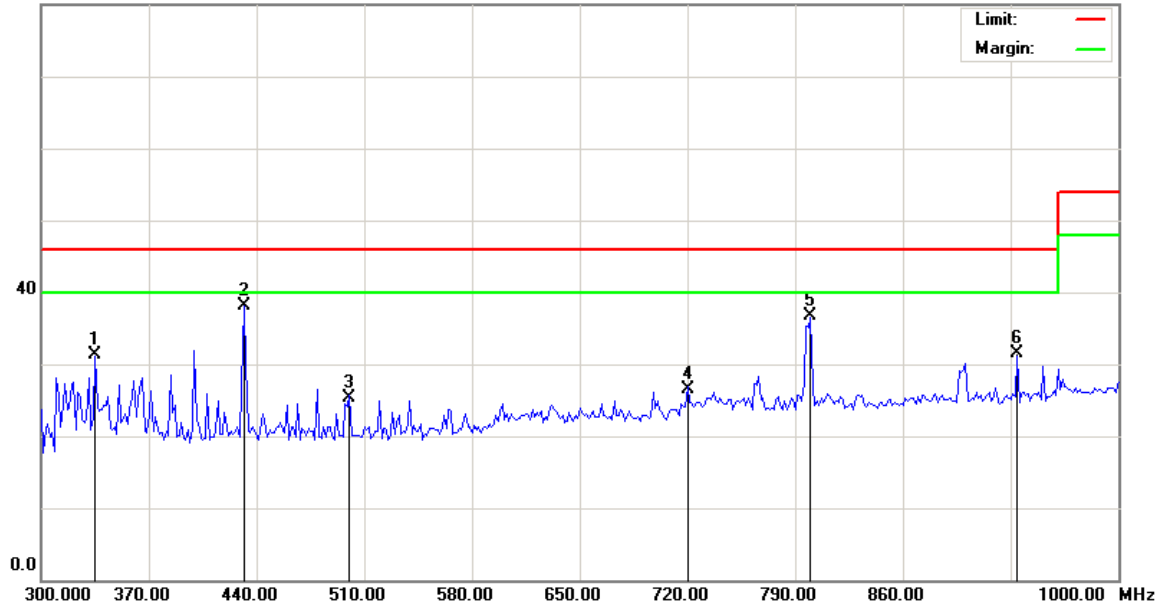

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N: Raymond 103

Mode: 11b

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		335.0000	40.53	-9.27	31.26	46.00	-14.74	peak		
2	*	431.6000	46.16	-8.03	38.13	46.00	-7.87	peak		
3		500.2000	32.44	-7.17	25.27	46.00	-20.73	peak		
4		720.0000	30.07	-3.55	26.52	46.00	-19.48	peak		
5		799.8000	38.95	-2.32	36.63	46.00	-9.37	peak		
6		934.2000	31.51	-0.06	31.45	46.00	-14.55	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only



3.6.6 Open Field Radiated Emissions (Subpart B)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Applicant : Inventec Corporation
Model No : Pharos Traveler 117
EUT : PDA PHONE
Test Mode : PC USB Link _ WLAN 802.11g Link Mode
Test Date : 04/22/2008

Please refer to next pager of detail testing data.

Notes:

1. Margin= Amplitude - Limits
2. Distance of Measurement: 3 Meter (30-1000MHz) & (1-10GHz), 1 Meter (10-26.5GHz)
3. Height of table for EUT placed: 0.8 Meter.
4. ANT= Antenna height.
5. Amplitude= Reading Amplitude - Amplifier gain + Cable loss + Antenna factor
(Auto calculate in spectrum analyzer)




File :Raymond 103(11g)

Data :#1

Date: 2008/4/22

Time:

80.0 dBuV

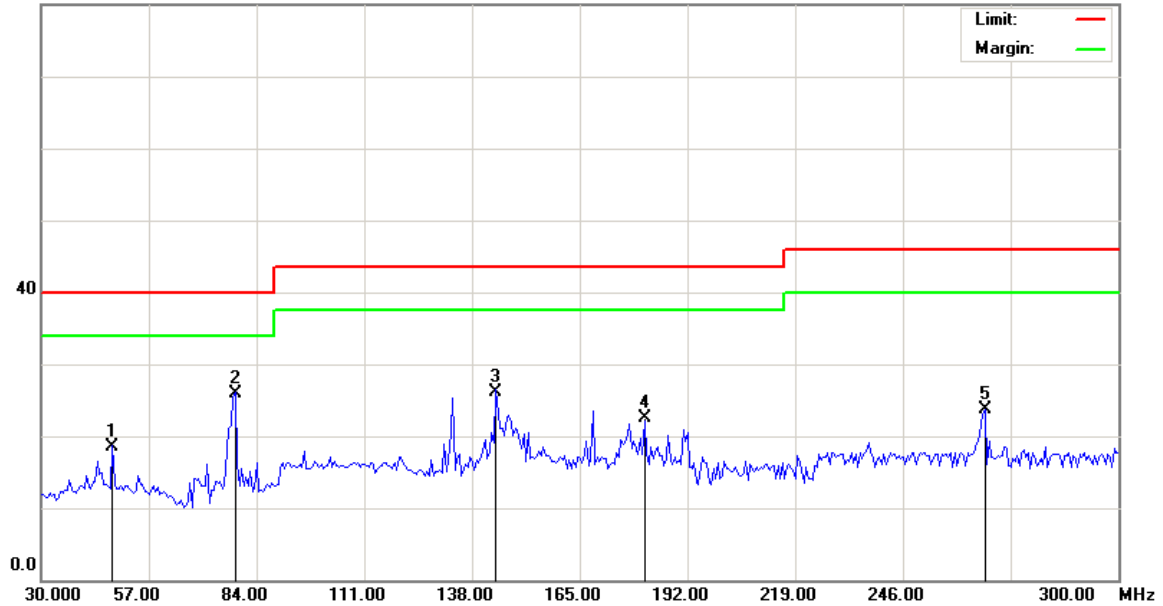

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: 11g

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		47.8200	30.48	-12.02	18.46	40.00	-21.54	peak			
2	*	78.6000	42.65	-16.72	25.93	40.00	-14.07	peak			
3		143.9400	42.35	-16.22	26.13	43.50	-17.37	peak			
4		181.2000	36.77	-14.19	22.58	43.50	-20.92	peak			
5		266.5200	34.63	-11.00	23.63	46.00	-22.37	peak			

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11g)

Data :#3

Date: 2008/4/22

Time:

80.0 dBuV

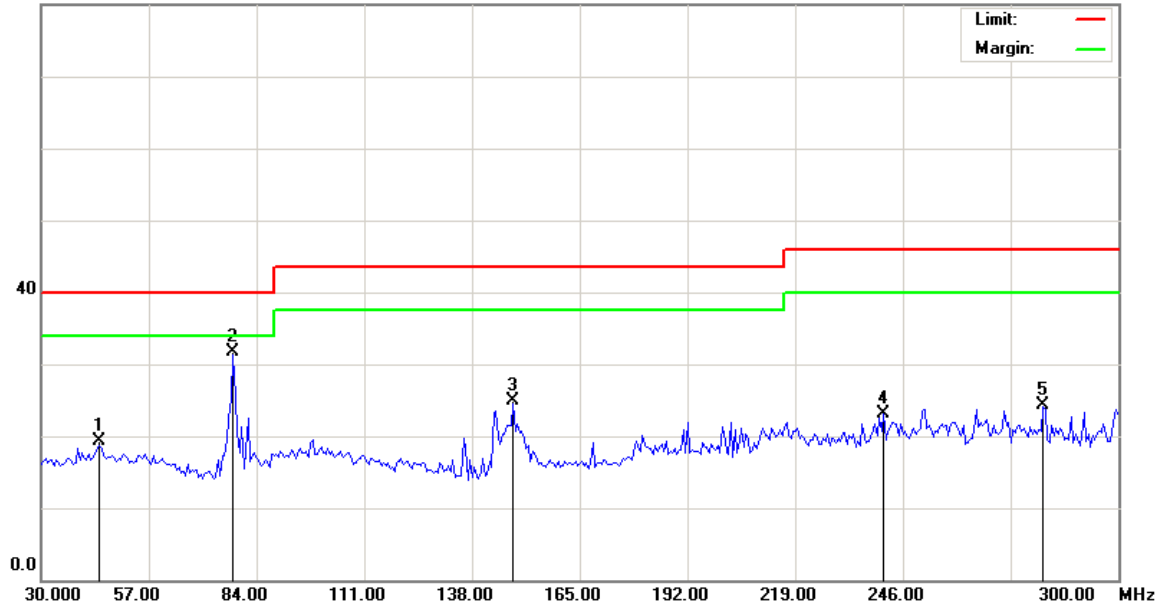

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: 11g

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		44.5800	31.11	-11.84	19.27	40.00	-20.73	peak		
2	*	78.0600	48.50	-16.79	31.71	40.00	-8.29	peak		
3		148.2600	40.89	-16.07	24.82	43.50	-18.68	peak		
4		241.1400	34.55	-11.39	23.16	46.00	-22.84	peak		
5		281.1000	34.67	-10.39	24.28	46.00	-21.72	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11g)

Data :#2

Date: 2008/4/22

Time:

80.0 dBuV

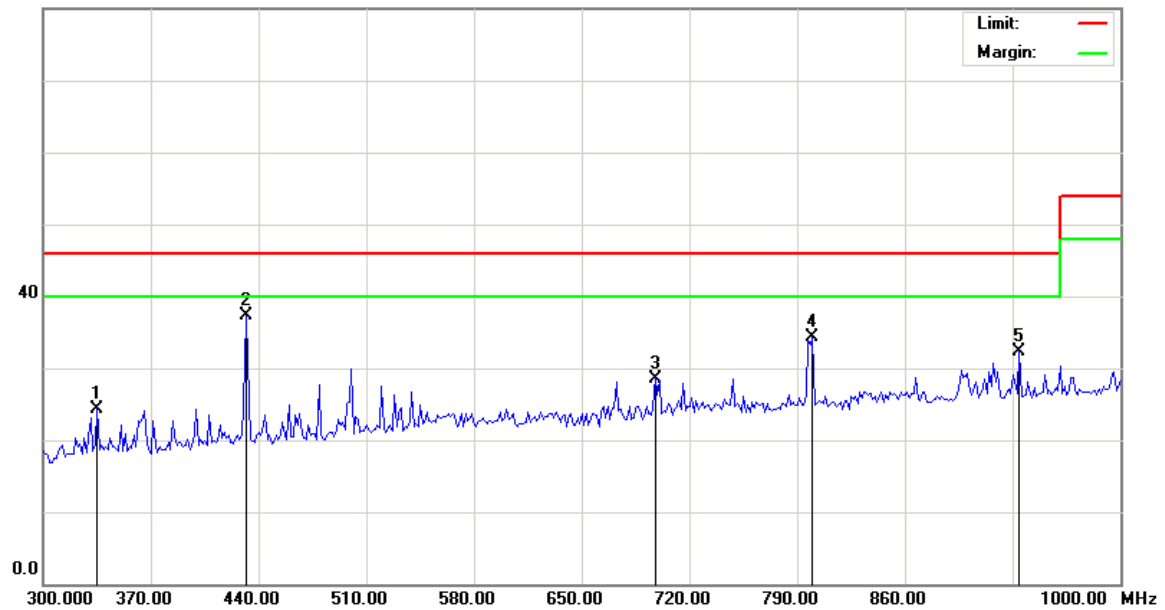

Site site#1

Polarization: **Vertical**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: 11g

Note: PC mode NB-01, 後上方USB孔

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		335.0000	33.65	-9.27	24.38	46.00	-21.62	peak		
2	*	431.6000	45.24	-8.03	37.21	46.00	-8.79	peak		
3		697.6000	32.44	-3.86	28.58	46.00	-17.42	peak		
4		799.8000	36.68	-2.32	34.36	46.00	-11.64	peak		
5		934.2000	32.33	-0.06	32.27	46.00	-13.73	peak		

*:Maximum data x:Over limit !:over margin

●Reference Only




File :Raymond 103(11g)

Data :#4

Date: 2008/4/22

Time:

80.0 dBuV

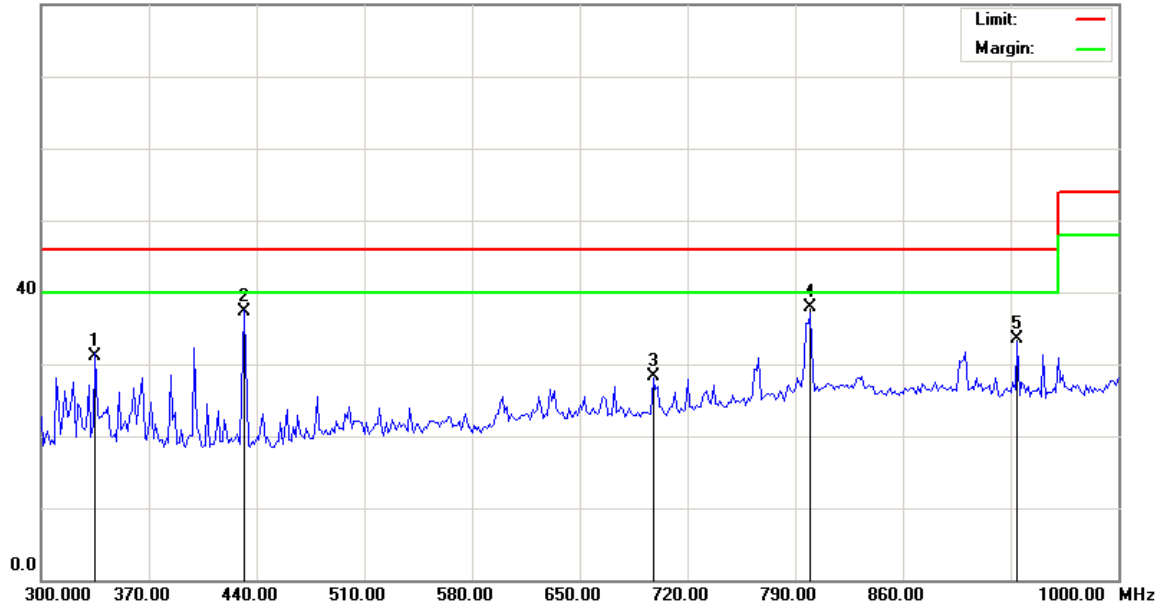

Site site#1

Polarization: **Horizontal**

Temperature: 22 °C

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode: 11g

Note: PC mode NB-01, 後上方USB孔


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		335.0000	40.39	-9.27	31.12	46.00	-14.88	peak		
2		431.6000	45.28	-8.03	37.25	46.00	-8.75	peak		
3		697.6000	32.22	-3.86	28.36	46.00	-17.64	peak		
4	*	799.8000	40.16	-2.32	37.84	46.00	-8.16	peak		
5		934.2000	33.59	-0.06	33.53	46.00	-12.47	peak		

*:Maximum data x:Over limit !:over margin


●Reference Only

Appendix A - EUT Test SETUP

MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE

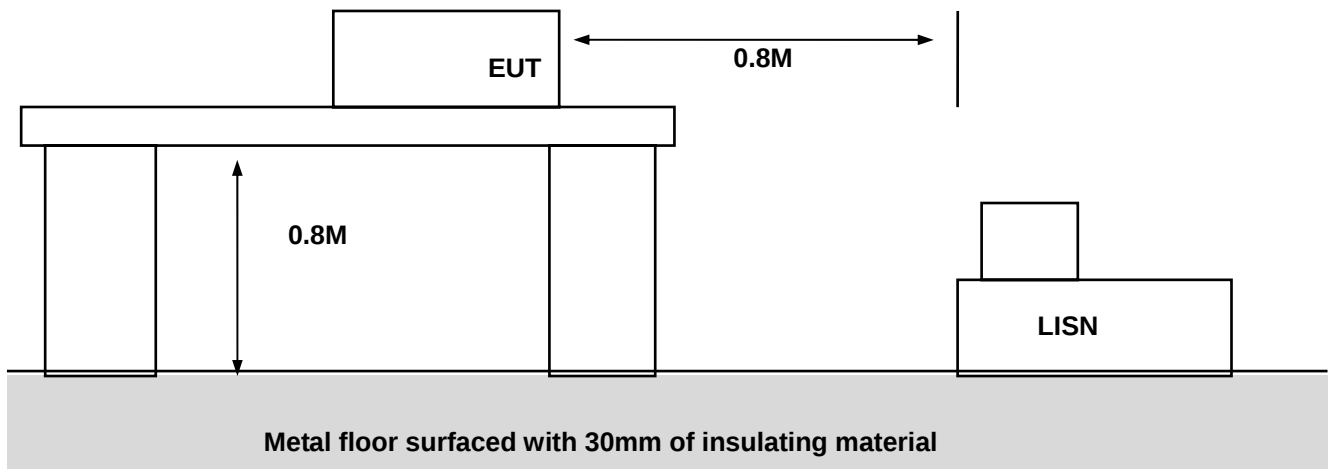

MEASUREMENT OF RADIATED EMISSION

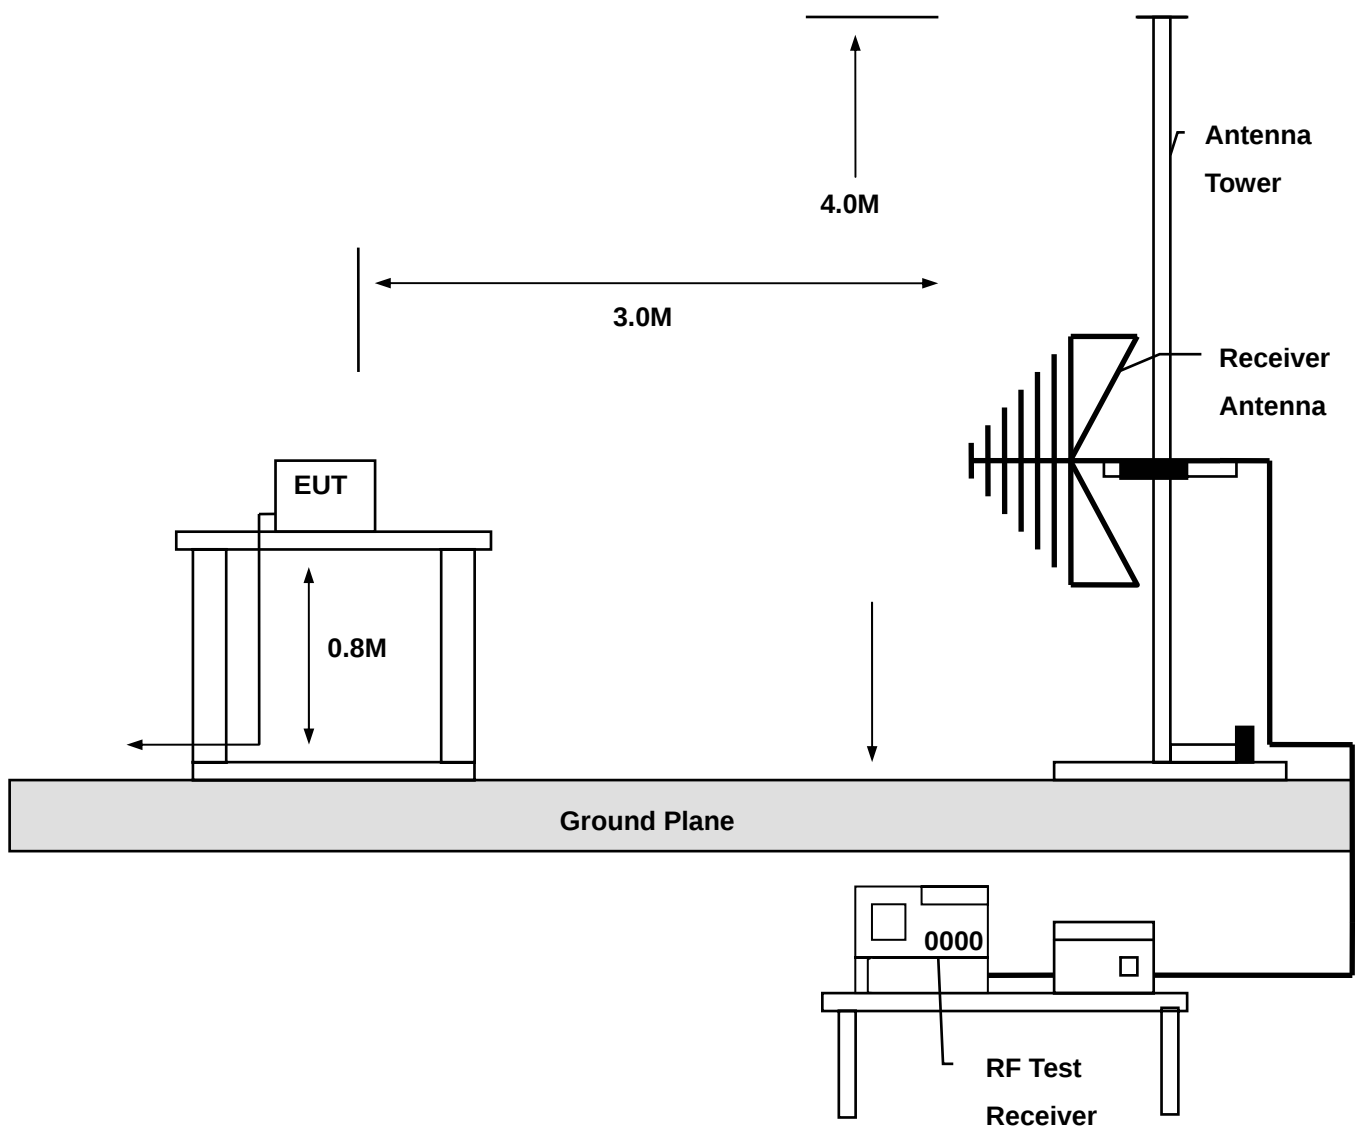



Appendix B - Block Diagram

See Next Page



Appendix C - EUT Photographs

EUT Photo _ 1 of 25



EUT Photo _ 2 of 25



EUT Photo _ 3 of 25



EUT Photo _ 4 of 25




EUT Photo _ 5 of 25




EUT Photo _ 6 of 25



EUT Photo _ 7 of 25

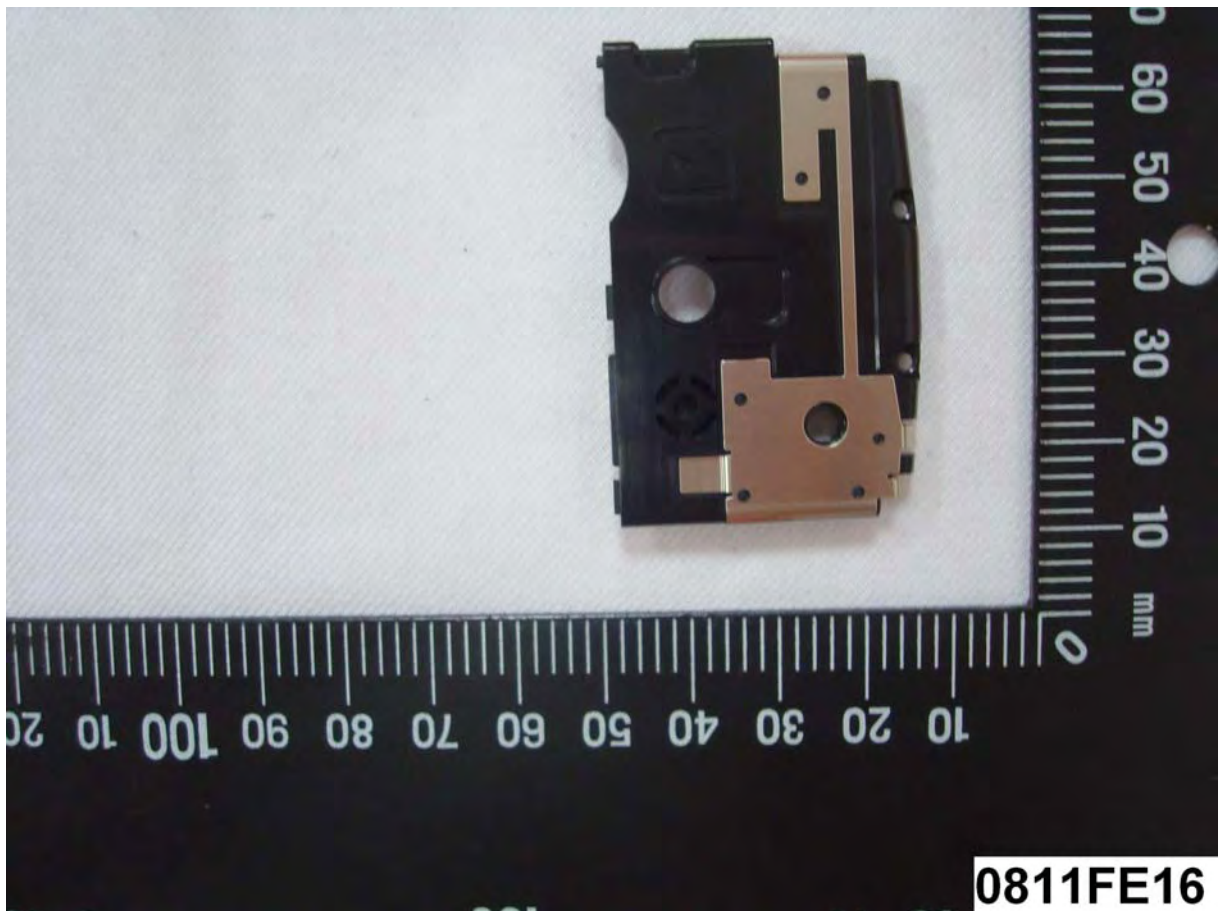

EUT Photo _ 8 of 25

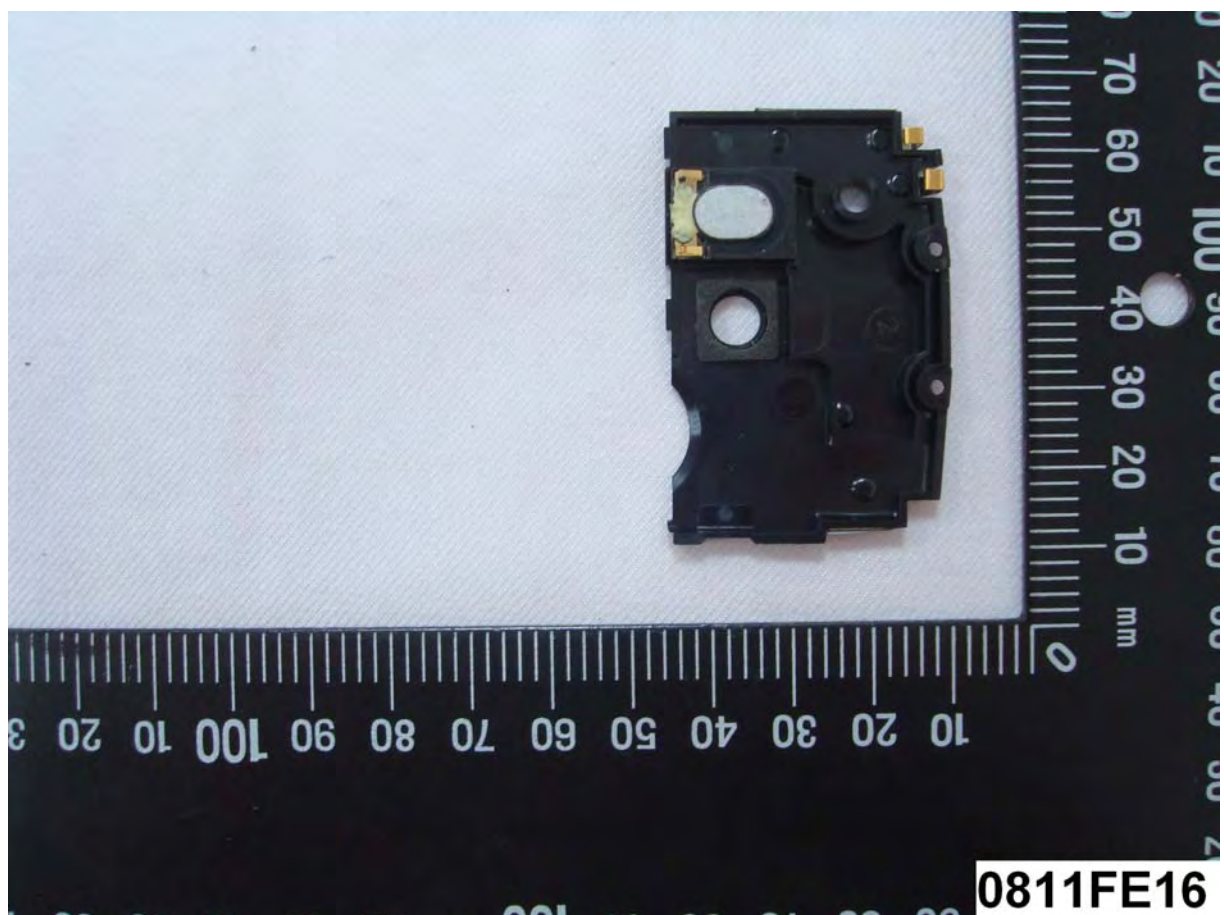

EUT Photo _ 9 of 25



EUT Photo _ 10 of 25




EUT Photo _ 11 of 25




EUT Photo _ 12 of 25



EUT Photo _ 13 of 25

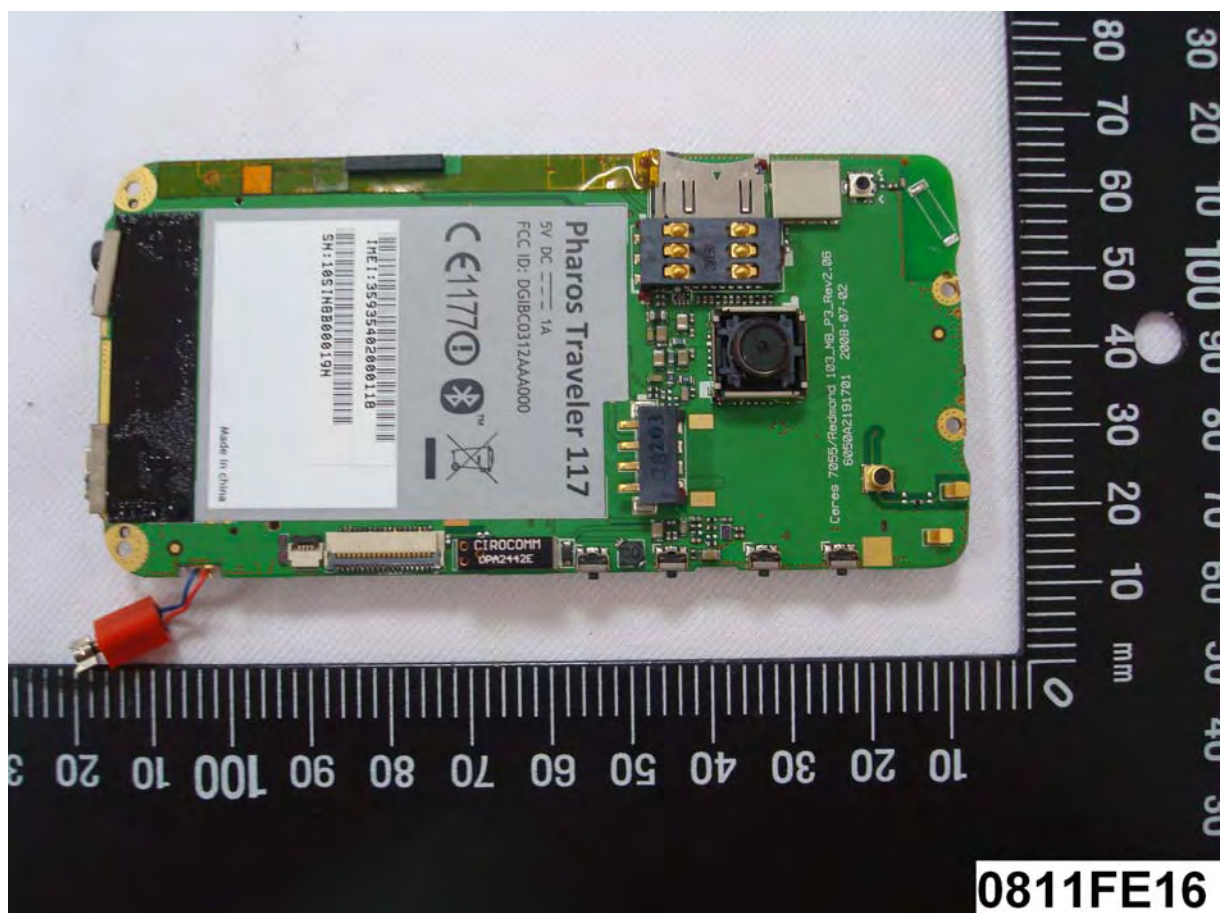

EUT Photo _ 14 of 25

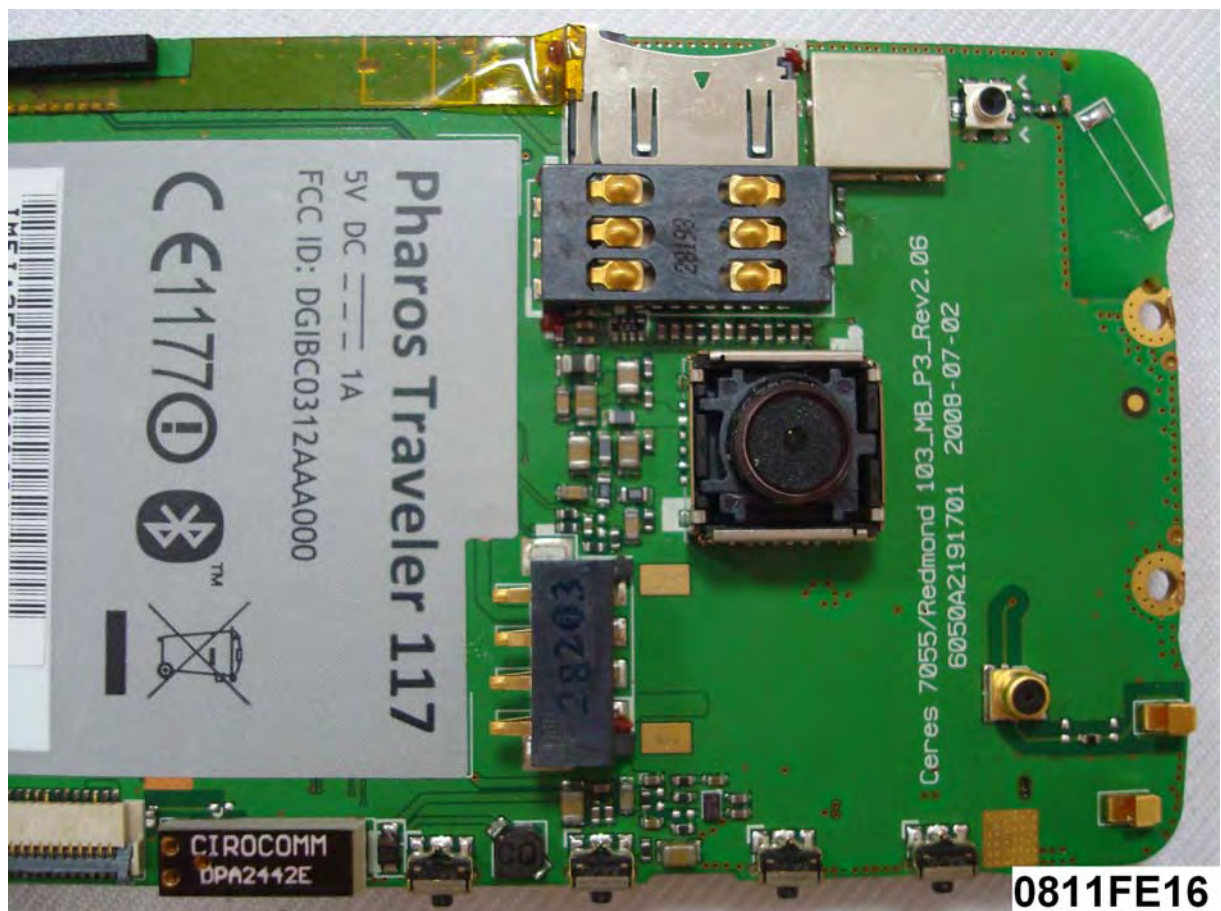


EUT Photo _ 15 of 25




EUT Photo _ 6 of 25




EUT Photo _ 7 of 25

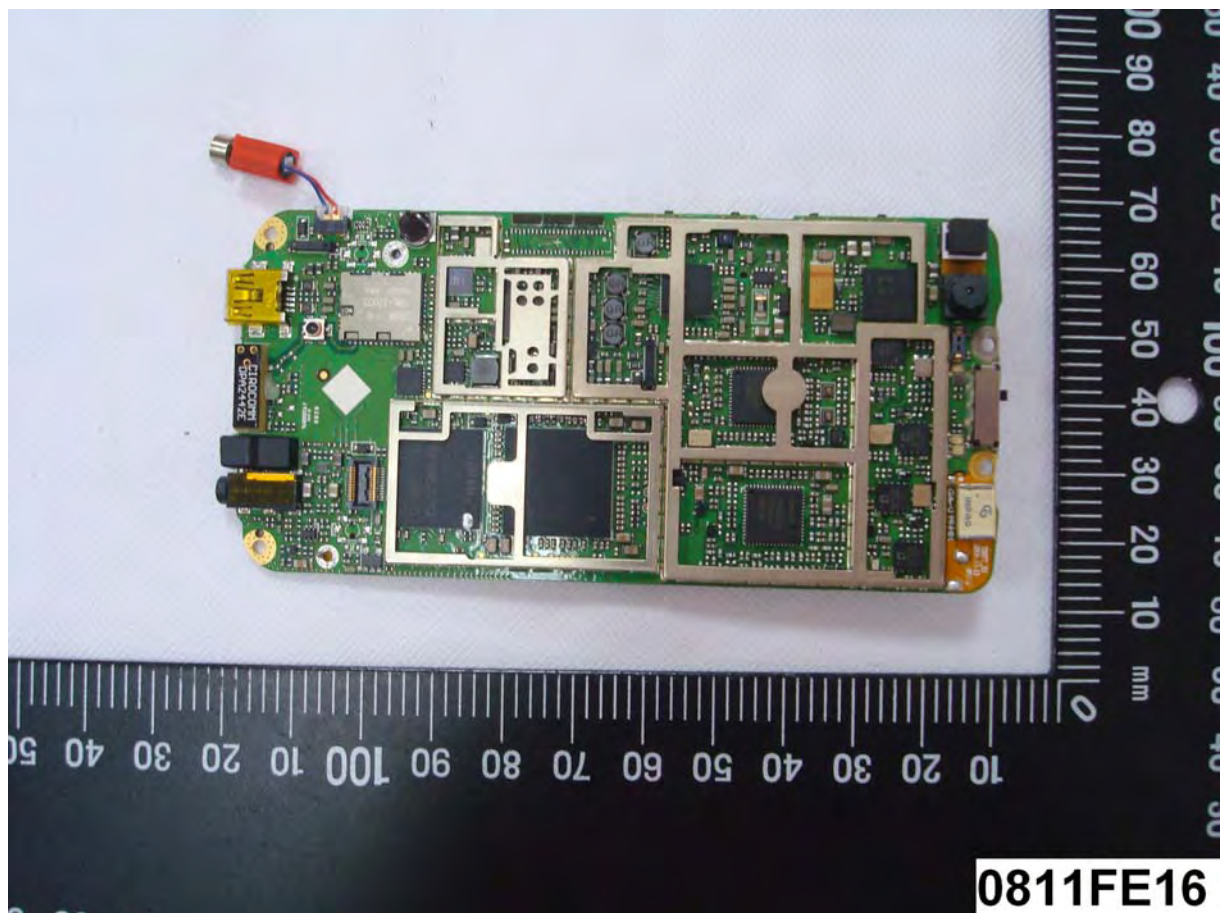

EUT Photo _ 8 of 25

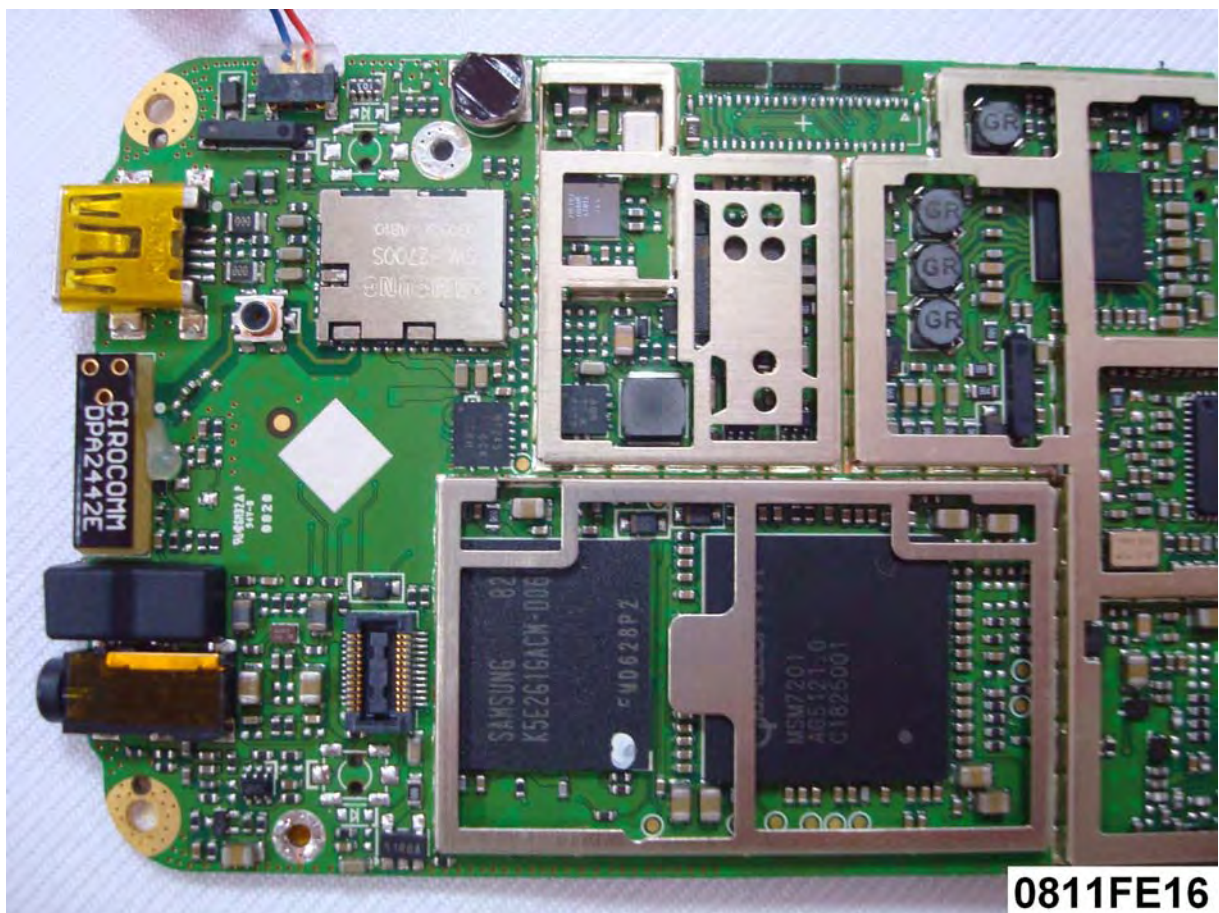

EUT Photo _ 9 of 25

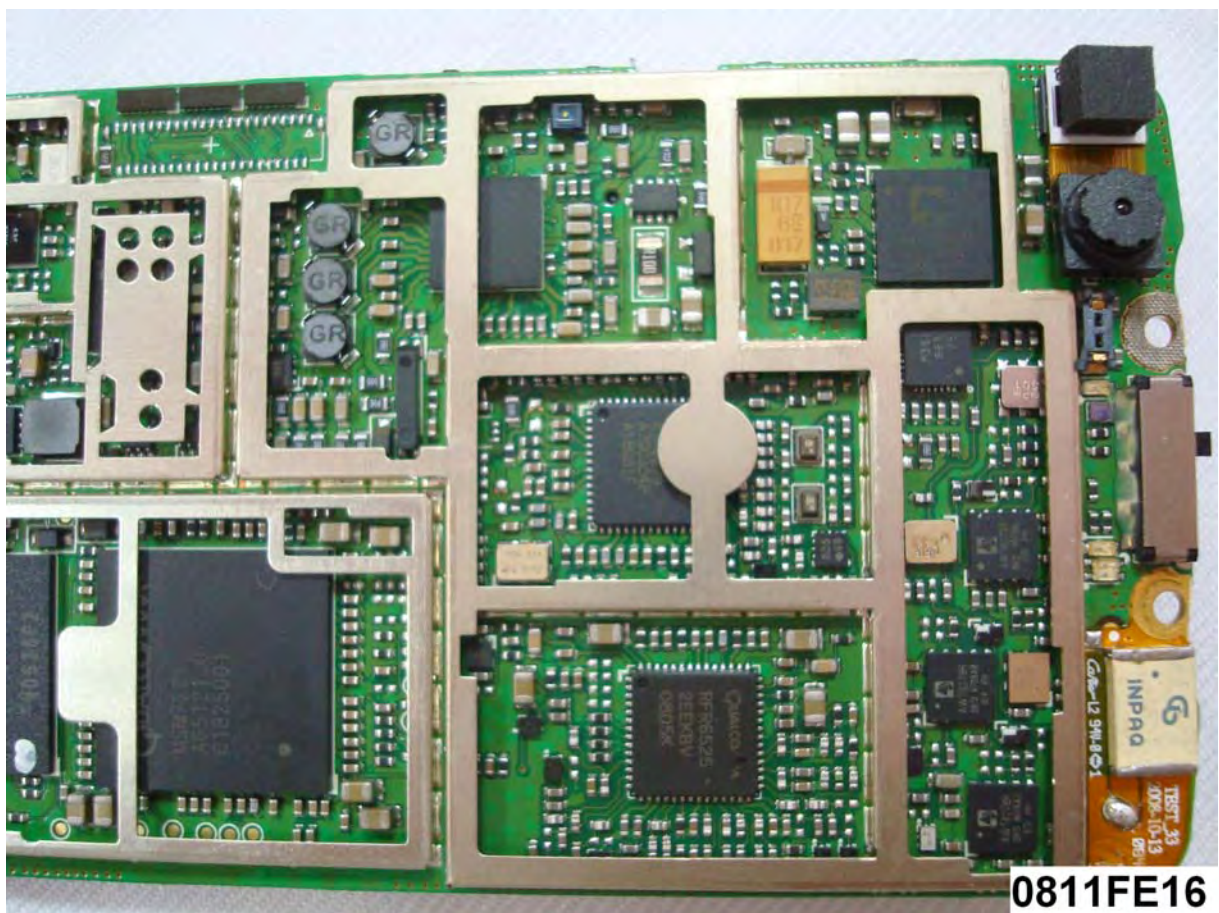


EUT Photo _ 10 of 25



0811FE16



EUT Photo _ 11 of 25

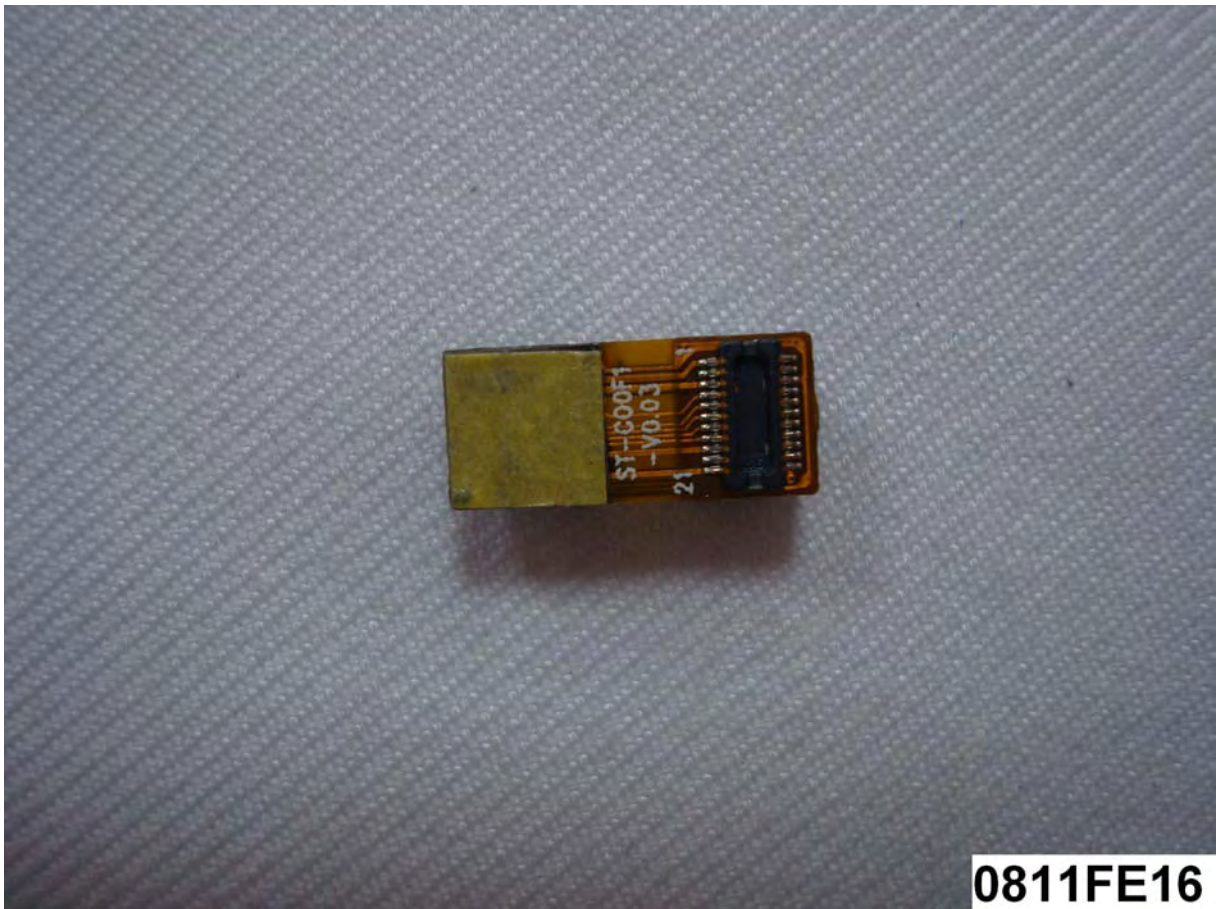

EUT Photo _ 12 of 25



EUT Photo _ 13 of 25



EUT Photo _ 14 of 25



EUT Photo _ 15 of 25



EUT Photo _ 14 of 25

