



A D T

FCC TEST REPORT (BLUETOOTH)

REPORT NO.: RF131008C18

MODEL NO.: MB Pro 1, MB Pro 2

(Refer to item 3.1 for more detail)

FCC ID: DMOCBSSHf

RECEIVED: Sep. 02, 2013

TESTED: Sep. 02 ~ Dec. 04, 2013

ISSUED: Dec. 05, 2013

APPLICANT: Sennheiser Electronic Corp (NY)

ADDRESS: 1 Enterprise Drive Old Lyme, Connecticut 06371
United States

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Table of Contents

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 DESCRIPTION OF SUPPORT UNITS	15
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	16
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
4. TEST TYPES AND RESULTS (FOR BLUETOOTH EDR)	18
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.2 TEST INSTRUMENTS	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS	22
4.2 CONDUCTED EMISSION MEASUREMENT	35
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	35
4.2.2 TEST INSTRUMENTS	35
4.2.3 TEST PROCEDURES	36
4.2.4 DEVIATION FROM TEST STANDARD	36
4.2.5 TEST SETUP	37
4.2.6 EUT OPERATING CONDITIONS	37
4.2.7 TEST RESULTS	38
4.3 NUMBER OF HOPPING FREQUENCY USED	46
4.3.1 LIMIT OF HOPPING FREQUENCY USED	46
4.3.2 TEST SETUP	46
4.3.3 TEST INSTRUMENTS	46
4.3.4 TEST PROCEDURES	46
4.3.5 DEVIATION FROM TEST STANDARD	46
4.3.6 TEST RESULTS	46
4.4 DWELL TIME ON EACH CHANNEL	48
4.4.1 LIMIT OF DWELL TIME USED	48
4.4.2 TEST SETUP	48
4.4.3 TEST INSTRUMENTS	48
4.4.4 TEST PROCEDURES	48
4.4.5 DEVIATION FROM TEST STANDARD	48
4.4.6 TEST RESULTS	49
4.5 CHANNEL BANDWIDTH	53
4.5.1 LIMITS OF CHANNEL BANDWIDTH	53
4.5.2 TEST SETUP	53
4.5.3 TEST INSTRUMENTS	53
4.5.4 TEST PROCEDURE	53
4.5.5 DEVIATION FROM TEST STANDARD	53

4.5.6	EUT OPERATING CONDITION	53
4.5.7	TEST RESULTS	54
4.6	HOPPING CHANNEL SEPARATION	55
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	55
4.6.2	TEST SETUP	55
4.6.3	TEST INSTRUMENTS	55
4.6.4	TEST PROCEDURES	55
4.6.5	DEVIATION FROM TEST STANDARD	55
4.6.6	TEST RESULTS	56
4.7	MAXIMUM OUTPUT POWER.....	57
4.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	57
4.7.2	TEST SETUP	57
4.7.3	TEST INSTRUMENTS	57
4.7.4	TEST PROCEDURES	57
4.7.5	DEVIATION FROM TEST STANDARD	57
4.7.6	EUT OPERATING CONDITION	57
4.7.7	TEST RESULTS	58
4.8	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	59
4.8.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	59
4.8.2	TEST INSTRUMENTS	59
4.8.3	TEST PROCEDURE	59
4.8.4	DEVIATION FROM TEST STANDARD	59
4.8.5	EUT OPERATING CONDITION	59
4.8.6	TEST RESULTS	59
5.	TEST TYPES AND RESULTS (FOR BLUETOOTH LE 4.0).....	62
5.1	RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	62
5.1.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	62
5.1.2	TEST INSTRUMENTS	62
5.1.3	TEST PROCEDURES	62
5.1.4	DEVIATION FROM TEST STANDARD	62
5.1.5	TEST SETUP	62
5.1.6	EUT OPERATING CONDITIONS	62
5.1.7	TEST RESULTS	63
5.2	CONDUCTED EMISSION MEASUREMENT	72
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	72
5.2.2	TEST INSTRUMENTS	72
5.2.3	TEST PROCEDURES	72
5.2.4	DEVIATION FROM TEST STANDARD	72
5.2.5	TEST SETUP	72
5.2.6	EUT OPERATING CONDITIONS	72
5.2.7	TEST RESULTS	73
5.3	6dB BANDWIDTH MEASUREMENT	81
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	81
5.3.2	TEST SETUP	81
5.3.3	TEST INSTRUMENTS	81
5.3.4	TEST PROCEDURE	81
5.3.5	DEVIATION FROM TEST STANDARD	81
5.3.6	EUT OPERATING CONDITIONS	81
5.3.7	TEST RESULTS	82
5.4	CONDUCTED OUTPUT POWER	83
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	83
5.4.2	TEST SETUP	83
5.4.3	TEST INSTRUMENTS	83

5.4.4	TEST PROCEDURES	83
5.4.5	DEVIATION FROM TEST STANDARD	83
5.4.6	EUT OPERATING CONDITIONS	83
5.4.7	TEST RESULTS	83
5.5	POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.2	TEST SETUP	84
5.5.3	TEST INSTRUMENTS	84
5.5.4	TEST PROCEDURE	84
5.5.5	DEVIATION FROM TEST STANDARD	84
5.5.6	EUT OPERATING CONDITION	84
5.5.7	TEST RESULTS	85
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	86
5.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	86
5.6.2	TEST SETUP	86
5.6.3	TEST INSTRUMENTS	86
5.6.4	TEST PROCEDURE	86
5.6.5	DEVIATION FROM TEST STANDARD	87
5.6.6	EUT OPERATING CONDITION	87
5.6.7	TEST RESULTS	87
5.6.8	TEST RESULTS	88
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	89
7.	INFORMATION ON THE TESTING LABORATORIES	90
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	91



A D T

RELEASE CONTROL RECORD


ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131008C18	Original release	Dec. 05, 2013

1. CERTIFICATION

PRODUCT: Bluetooth Headset
MODEL NO.: MB Pro 1, MB Pro 2 (Refer to item 3.1 for more detail)
BRAND: SENNHEISER
APPLICANT: Sennheiser Electronic Corp (NY)
TESTED: Sep. 02 ~ Dec. 04, 2013
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: MB Pro 1, MB Pro 2) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Dec. 05, 2013
Pettie Chen / Senior Specialist

APPROVED BY :  , **DATE** : Dec. 05, 2013
Ken Liu / Senior Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Bluetooth EDR)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -27.00dB at 0.43906MHz.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.1dB at 43.48MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) (Bluetooth LE 4.0)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -28.44dB at 0.43125MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.4dB at 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Bluetooth Headset	
MODEL NO.	MB Pro 1, MB Pro 2 (Refer to NOTE for more detail)	
POWER SUPPLY	3.7Vdc (Battery) 5.0Vdc (Adapter)	
MODULATION TYPE	Bluetooth EDR	GFSK, $\pi/4$ -DQPSK, 8DPSK
	Bluetooth LE 4.0	GFSK
TRANSFER RATE	Bluetooth EDR	1/2/3Mbps
	Bluetooth LE 4.0	1Mbps
OPERATING FREQUENCY	2402 ~ 2480MHz	
NUMBER OF CHANNEL	Bluetooth EDR	79
	Bluetooth LE 4.0	40
CHANNEL SPACING	Bluetooth EDR	1MHz
	Bluetooth LE 4.0	2MHz
OUTPUT POWER	Bluetooth EDR	9.550mW
	Bluetooth LE 4.0	9.204mW
ANTENNA TYPE	PCB antenna with 0.29dBi gain	
ANTENNA CONNECTOR	NA	
DATA CABLE	NA	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Refer to Note as below	

NOTE:

1. All models are listed as below.

Brand	Model	Difference
SENNHEISER	MB Pro 1	1 speaker
SENNHEISER	MB Pro 2	2 speakers

*After pretesting, model: MB Pro 2 was the worst for the final test.

2. The EUT contains the following accessories.

No.	Product	Brand	Description
1	CH 20 MB USB	SENNHEISER	1.95m non-shielded USB cable
2	CH 20 MB charger	SENNHEISER	-
3	Battery	-	3.7V, 205mAh, Built-in
4	Bluetooth USB dongle	SENNHEISER	Model: BTD 800 USB FCC ID: DMOCBBSKE
5	Car charger (Optional)	SENNHEISER	Model: 50457 Input: 12-24Vdc, 0.5A Output: 5Vdc, 500mA

3. The EUT uses following support unit.

Product	Brand	Model	Description
Adapter 1	SENNHEISER	SSA-4P 5050F	Input: 100-240Vac, 50/60Hz, 0.2A Output: 5.0Vdc, 500mA
Adapter 2	SIL Switching Adapter	SSA-3P 050015EU	Input: 100-240Vac~50/60Hz, 0.2A Output: 5.0Vdc, 150mA

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Bluetooth EDR:

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Bluetooth LE 4.0:

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Bluetooth EDR:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	-	-	√	EUT Standalone
B	-	√	√	-	EUT tested with long USB cable (1.95m) + adapter 1
C	-	√	√	-	EUT tested with short USB cable (1m) + adapter 1
D	-	√	√	-	EUT tested with long USB cable (1.95m) + adapter 2
E	-	√	√	-	EUT tested with short USB cable (1m) + adapter 2
F	-	√	-	-	EUT tested with long USB cable (1.95m) + car charger
G	-	√	-	-	EUT tested with short USB cable (1m) + car charger

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
2. "-" means no effect.
3. The short USB cable (1m) of mode C & E was support unit.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	GFSK	DH5
A	0 to 78	0, 39, 78	8DPSK	DH5

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
B, C, D, E, F, G	0 to 78	78	8DPSK	DH5

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
B, C, D, E	0 to 78	78	8DPSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	GFSK	DH5
A	0 to 78	0, 39, 78	8DPSK	DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	23deg. C, 72%RH	120Vac, 60Hz	Chris Lin
RE<1G	23deg. C, 72%RH 25deg. C, 65%RH 26deg. C, 71%RH	120Vac, 60Hz	Martin Lee Ted Chang Chris Lin
PLC	24deg. C, 64%RH 26deg. C, 68%RH	120Vac, 60Hz	Match Tsui Leo Tsai
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui

FOR Bluetooth LE 4.0:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	-	-	√	EUT Standalone
B	-	√	√	-	EUT tested with long USB cable (1.95m) + adapter 1
C	-	√	√	-	EUT tested with short USB cable (1m) + adapter 1
D	-	√	√	-	EUT tested with long USB cable (1.95m) + adapter 2
E	-	√	√	-	EUT tested with short USB cable (1m) + adapter 2
F	-	√	-	-	EUT tested with long USB cable (1.95m) + car charger
G	-	√	-	-	EUT tested with short USB cable (1m) + car charger

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
2. "-" means no effect.
3. The short USB cable (1m) of mode C & E was support unit.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0, 19, 39	GFSK	1.0

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
B, C, D, E, F, G	0 to 39	39	GFSK	1.0

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
B, C, D, E	0 to 39	39	GFSK	1.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0, 19, 39	GFSK	1.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	23deg. C, 72%RH	120Vac, 60Hz	Chris Lin
RE<1G	23deg. C, 72%RH 25deg. C, 65%RH 26deg. C, 71%RH	120Vac, 60Hz	Martin Lee Ted Chang Chris Lin
PLC	24deg. C, 64%RH 26deg. C, 68%RH	120Vac, 60Hz	Match Tsui Leo Tsai
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Car charger	SENNHEISER	50457	NA	NA


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE:


1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 was provided by client.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST


Test Mode A

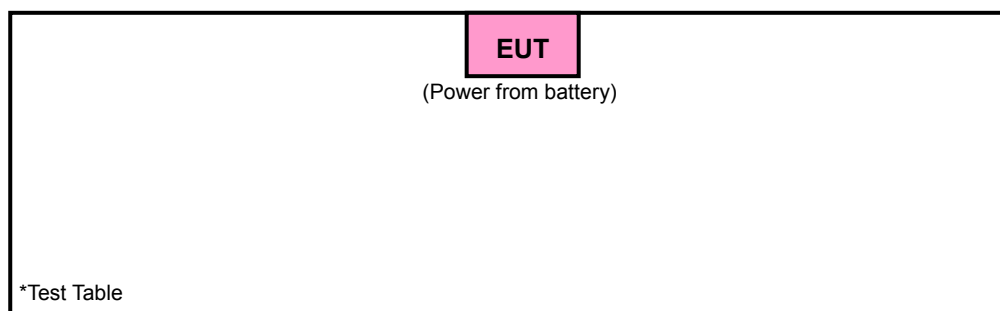

Test Mode B, C, D, E

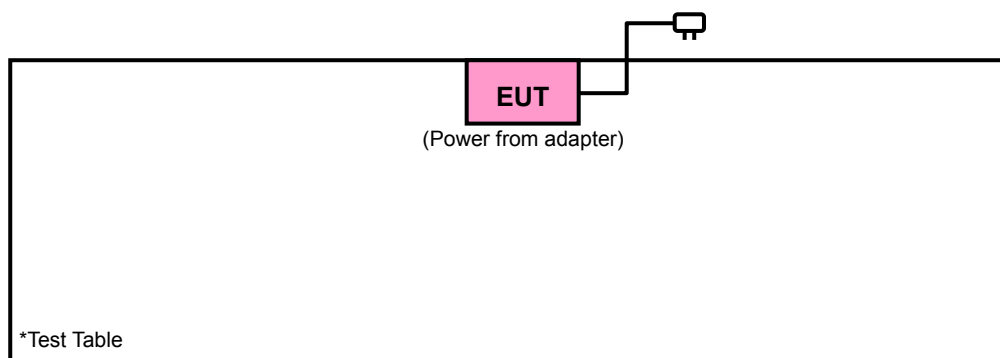

Test Mode F, G

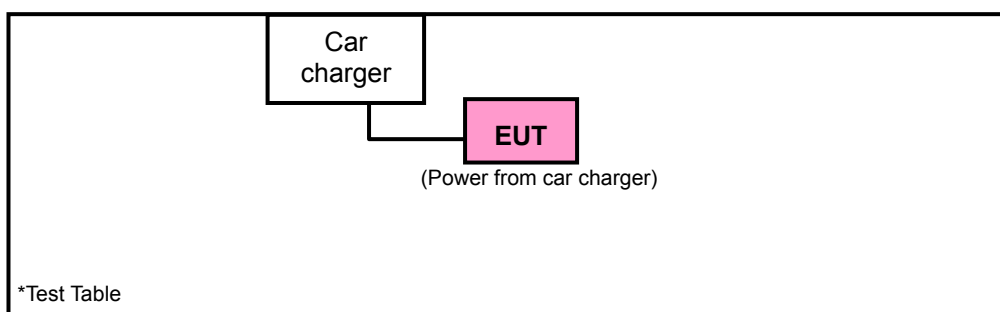

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074D01 DTS Meas Guidance v03r01

FCC Public Notice DA 00-705

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

4. TEST TYPES AND RESULTS (FOR Bluetooth EDR)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8447D	2944A10627	Aug. 26, 2013	Aug. 25, 2014
Preamplifier Agilent	8449B	3008A01964	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 23, 2013	Aug. 22, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 23, 2013	Aug. 22, 2014
Software BV ADT	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Jul. 29, 2013	Jul. 28, 2014
Power Sensor	MA2411B	0738171	Jul. 29, 2013	Jul. 28, 2014

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

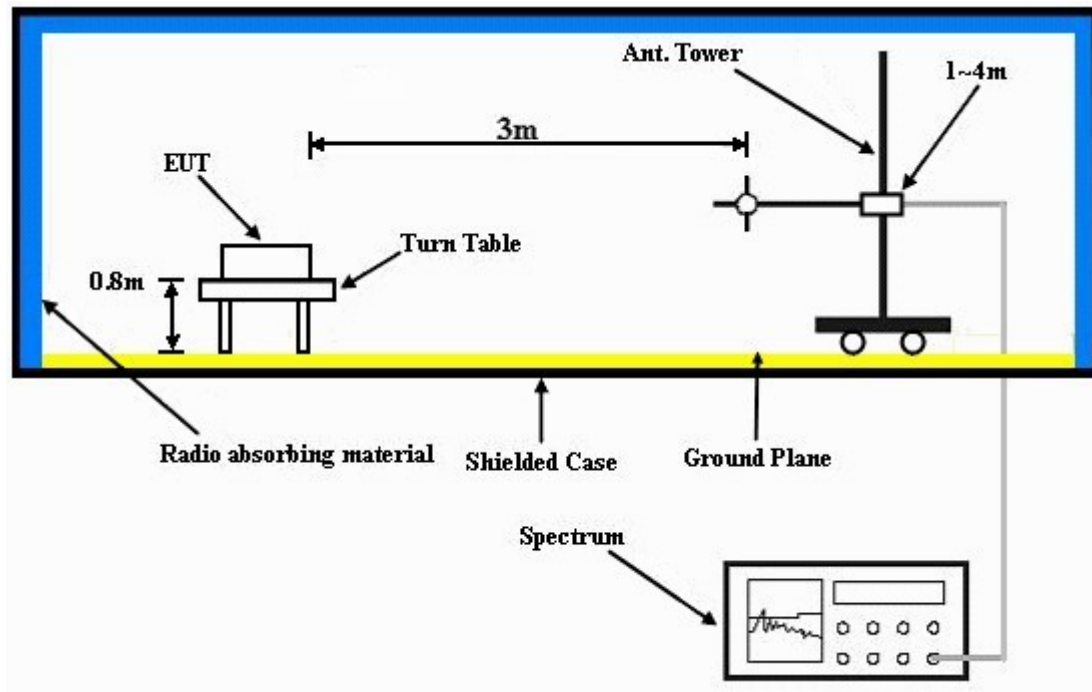

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA :

GFSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.9 PK	74.0	-20.1	1.04 H	311	23.10	30.80
2	2390.00	42.5 AV	54.0	-11.5	1.04 H	311	11.70	30.80
3	2400.00	60.9 PK	74.0	-13.1	1.04 H	311	64.40	-3.50
4	2400.00	30.8 AV	54.0	-23.2	1.04 H	311	34.30	-3.50
5	*2402.00	102.9 PK			1.04 H	311	72.00	30.90
6	*2402.00	72.8 AV			1.04 H	311	41.90	30.90
7	4804.00	53.6 PK	74.0	-20.4	1.18 H	115	50.60	3.00
8	4804.00	23.5 AV	54.0	-30.5	1.18 H	115	20.50	3.00

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- * *: Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.19 V	311	23.30	30.80
2	2390.00	42.6 AV	54.0	-11.4	1.19 V	311	11.80	30.80
3	2400.00	61.6 PK	74.0	-12.4	1.19 V	311	65.10	-3.50
4	2400.00	31.5 AV	54.0	-22.5	1.19 V	311	35.00	-3.50
5	*2402.00	102.9 PK			1.19 V	311	72.00	30.90
6	*2402.00	72.8 AV			1.19 V	311	41.90	30.90
7	4804.00	57.4 PK	74.0	-16.6	1.06 V	38	54.40	3.00
8	4804.00	27.3 AV	54.0	-26.7	1.06 V	38	24.30	3.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading + $20\log(\text{duty cycle})$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	104.8 PK			1.26 H	307	73.80	31.00
2	*2441.00	74.7 AV			1.26 H	307	43.70	31.00
3	4882.00	50.7 PK	74.0	-23.3	1.26 H	119	47.40	3.30
4	4882.00	20.6 AV	54.0	-33.4	1.26 H	119	17.30	3.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.6 PK			1.44 V	310	72.60	31.00
2	*2441.00	73.5 AV			1.44 V	310	42.50	31.00
3	4882.00	50.0 PK	74.0	-24.0	1.35 V	337	46.70	3.30
4	4882.00	19.9 AV	54.0	-34.1	1.35 V	337	16.60	3.30

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- * *: Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	106.2 PK			1.02 H	28	75.00	31.20
2	*2480.00	72.1 AV			1.02 H	28	40.90	31.20
3	2483.50	59.2 PK	74.0	-14.8	1.02 H	28	28.00	31.20
4	2483.50	48.0 AV	54.0	-6.0	1.02 H	28	16.80	31.20
5	4960.00	50.6 PK	74.0	-23.4	1.00 H	327	47.20	3.40
6	4960.00	20.5 AV	54.0	-33.5	1.00 H	327	17.10	3.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.4 PK			1.63 V	257	71.20	31.20
2	*2480.00	72.3 AV			1.63 V	257	41.10	31.20
3	2483.50	57.5 PK	74.0	-16.5	1.63 V	257	26.30	31.20
4	2483.50	45.7 AV	54.0	-8.3	1.63 V	257	14.50	31.20
5	4960.00	54.9 PK	74.0	-19.1	1.02 V	37	51.50	3.40
6	4960.00	24.8 AV	54.0	-29.2	1.02 V	37	21.40	3.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading + $20\log(\text{duty cycle})$

8DPSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.4 PK	74.0	-20.6	1.32 H	34	22.60	30.80
2	2390.00	43.1 AV	54.0	-10.9	1.32 H	34	12.30	30.80
3	2400.00	61.3 PK	74.0	-12.7	1.32 H	34	64.80	-3.50
4	2400.00	31.2 AV	54.0	-22.8	1.32 H	34	34.70	-3.50
5	*2402.00	102.2 PK			1.32 H	34	71.30	30.90
6	*2402.00	72.1 AV			1.32 H	34	41.20	30.90
7	4804.00	51.3 PK	74.0	-22.7	1.20 H	278	48.30	3.00
8	4804.00	21.2 AV	54.0	-32.8	1.20 H	278	18.20	3.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.22 V	312	23.60	30.80
2	2390.00	42.4 AV	54.0	-11.6	1.22 V	312	11.60	30.80
3	2400.00	61.6 PK	74.0	-12.4	1.22 V	312	65.10	-3.50
4	2400.00	31.5 AV	54.0	-22.5	1.22 V	312	35.00	-3.50
5	*2402.00	102.5 PK			1.22 V	312	71.60	30.90
6	*2402.00	72.4 AV			1.22 V	312	41.50	30.90
7	4804.00	53.1 PK	74.0	-20.9	1.23 V	18	50.10	3.00
8	4804.00	23.0 AV	54.0	-31.0	1.23 V	18	20.00	3.00

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- * *: Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.5 PK			1.04 H	313	72.50	31.00
2	*2441.00	73.4 AV			1.04 H	313	42.40	31.00
3	4882.00	52.9 PK	74.0	-21.1	1.36 H	214	49.60	3.30
4	4882.00	22.8 AV	54.0	-31.2	1.36 H	214	19.50	3.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.4 PK			1.17 V	326	72.40	31.00
2	*2441.00	73.3 AV			1.17 V	326	42.30	31.00
3	4882.00	55.5 PK	74.0	-18.5	1.54 V	25	52.20	3.30
4	4882.00	25.4 AV	54.0	-28.6	1.54 V	25	22.10	3.30

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- * *: Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	105.9 PK			1.00 H	141	74.70	31.20
2	*2480.00	75.8 AV			1.00 H	141	44.60	31.20
3	2483.50	62.4 PK	74.0	-11.6	1.00 H	142	31.20	31.20
4	2483.50	48.8 AV	54.0	-5.2	1.00 H	142	17.60	31.20
5	4960.00	53.0 PK	74.0	-21.0	1.36 H	258	49.60	3.40
6	4960.00	22.9 AV	54.0	-31.1	1.36 H	258	19.50	3.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.4 PK			1.18 V	141	70.20	31.20
2	*2480.00	71.3 AV			1.18 V	141	40.10	31.20
3	2483.50	59.3 PK	74.0	-14.7	1.18 V	141	28.10	31.20
4	2483.50	47.2 AV	54.0	-6.8	1.18 V	141	16.00	31.20
5	4960.00	54.0 PK	74.0	-20.0	1.11 V	214	50.60	3.40
6	4960.00	23.9 AV	54.0	-30.1	1.11 V	214	20.50	3.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading + $20\log(\text{duty cycle})$

BELOW 1GHz WORST-CASE DATA : 8DPSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.78	32.8 QP	40.0	-7.2	1.25 H	275	48.80	-16.00
2	124.98	30.1 QP	43.5	-13.4	1.00 H	358	45.90	-15.80
3	371.41	29.2 QP	46.0	-16.8	1.50 H	197	40.30	-11.10
4	577.09	24.4 QP	46.0	-21.6	1.00 H	3	31.50	-7.10
5	722.62	25.4 QP	46.0	-20.6	1.25 H	326	29.70	-4.30
6	872.03	32.1 QP	46.0	-13.9	1.50 H	294	33.70	-1.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.48	37.9 QP	40.0	-2.1	1.25 V	274	52.20	-14.30
2	74.53	30.4 QP	40.0	-9.6	1.00 V	90	47.60	-17.20
3	124.98	29.0 QP	43.5	-14.5	1.50 V	258	44.80	-15.80
4	144.38	25.1 QP	43.5	-18.4	1.00 V	19	39.20	-14.10
5	458.73	23.1 QP	46.0	-22.9	1.25 V	161	32.30	-9.20
6	872.03	33.6 QP	46.0	-12.4	1.50 V	79	35.20	-1.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Chris Lin
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.2 QP	40.0	-12.8	1.25 H	218	42.00	-14.80
2	113.34	25.1 QP	43.5	-18.4	1.00 H	225	42.20	-17.10
3	247.22	19.3 QP	46.0	-26.7	1.50 H	185	33.80	-14.50
4	371.41	31.9 QP	46.0	-14.1	1.00 H	222	43.00	-11.10
5	753.67	25.6 QP	46.0	-20.4	1.50 H	141	28.90	-3.30
6	872.03	29.8 QP	46.0	-16.2	1.25 H	254	31.40	-1.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.42	35.4 QP	40.0	-4.6	1.25 V	337	49.40	-14.00
2	103.64	24.2 QP	43.5	-19.3	1.00 V	105	42.30	-18.10
3	371.41	21.0 QP	46.0	-25.0	1.50 V	306	32.10	-11.10
4	579.03	21.9 QP	46.0	-24.1	1.00 V	136	29.00	-7.10
5	747.85	24.6 QP	46.0	-21.4	1.25 V	89	28.20	-3.60
6	872.03	31.2 QP	46.0	-14.8	1.50 V	84	32.80	-1.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	D		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.5 QP	40.0	-13.5	1.50 H	57	41.30	-14.80
2	156.03	15.5 QP	43.5	-28.0	1.24 H	94	29.40	-13.90
3	363.65	30.5 QP	46.0	-15.5	1.00 H	3	41.80	-11.30
4	480.07	21.5 QP	46.0	-24.5	1.50 H	194	30.40	-8.90
5	641.13	24.5 QP	46.0	-21.5	1.00 H	357	30.00	-5.50
6	765.31	26.6 QP	46.0	-19.4	1.00 H	208	29.60	-3.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.4 QP	40.0	-12.6	1.24 V	12	42.20	-14.80
2	136.62	17.6 QP	43.5	-25.9	1.99 V	251	32.20	-14.60
3	280.21	16.3 QP	46.0	-29.7	1.00 V	329	29.10	-12.80
4	371.41	21.2 QP	46.0	-24.8	1.00 V	312	32.30	-11.10
5	480.07	22.0 QP	46.0	-24.0	1.50 V	245	30.90	-8.90
6	625.60	24.3 QP	46.0	-21.7	1.24 V	52	30.00	-5.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	E		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.7 QP	40.0	-13.3	1.24 H	166	41.50	-14.80
2	171.55	15.7 QP	43.5	-27.8	1.00 H	31	29.80	-14.10
3	359.77	29.6 QP	46.0	-16.4	1.99 H	145	41.00	-11.40
4	423.80	24.4 QP	46.0	-21.6	1.50 H	197	34.50	-10.10
5	480.07	25.0 QP	46.0	-21.0	1.99 H	36	33.90	-8.90
6	623.66	24.9 QP	46.0	-21.1	1.00 H	145	30.60	-5.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.2 QP	40.0	-12.8	1.24 V	244	42.00	-14.80
2	144.38	16.5 QP	43.5	-27.0	1.00 V	232	30.60	-14.10
3	352.01	22.3 QP	46.0	-23.7	1.50 V	92	33.80	-11.50
4	423.80	23.1 QP	46.0	-22.9	1.00 V	67	33.20	-10.10
5	623.66	24.3 QP	46.0	-21.7	1.99 V	184	30.00	-5.70
6	738.15	25.3 QP	46.0	-20.7	1.00 V	143	29.30	-4.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 71%RH	TESTED BY	Chris Lin
TEST MODE	F		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.9 QP	40.0	-13.1	1.25 H	227	41.80	-14.90
2	161.85	15.6 QP	43.5	-27.9	1.00 H	22	29.20	-13.60
3	384.99	18.4 QP	46.0	-27.6	1.50 H	214	29.10	-10.70
4	606.20	23.0 QP	46.0	-23.0	1.00 H	86	28.90	-5.90
5	780.83	28.2 QP	46.0	-17.8	1.25 H	13	30.50	-2.30
6	926.36	30.1 QP	46.0	-15.9	1.50 H	273	29.80	0.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.72	28.3 QP	40.0	-11.7	1.50 V	87	43.20	-14.90
2	159.91	15.5 QP	43.5	-28.0	1.00 V	150	29.20	-13.70
3	417.98	20.5 QP	46.0	-25.5	1.00 V	9	30.70	-10.20
4	608.14	23.7 QP	46.0	-22.3	1.00 V	180	29.50	-5.80
5	802.18	27.3 QP	46.0	-18.7	1.24 V	221	29.50	-2.20
6	924.42	30.3 QP	46.0	-15.7	1.24 V	2	30.00	0.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 71%RH	TESTED BY	Chris Lin
TEST MODE	G		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.6 QP	40.0	-13.4	1.25 H	68	41.50	-14.90
2	152.15	15.6 QP	43.5	-27.9	1.00 H	18	29.20	-13.60
3	328.72	17.9 QP	46.0	-28.1	1.50 H	70	29.40	-11.50
4	520.82	21.3 QP	46.0	-24.7	1.25 H	251	29.40	-8.10
5	714.86	25.6 QP	46.0	-20.4	1.00 H	160	29.70	-4.10
6	866.21	29.6 QP	46.0	-16.4	1.50 H	317	30.80	-1.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.5 QP	40.0	-13.5	1.25 V	247	41.40	-14.90
2	165.73	15.0 QP	43.5	-28.5	1.00 V	6	29.40	-14.40
3	443.21	20.3 QP	46.0	-25.7	1.50 V	88	29.70	-9.40
4	646.95	24.4 QP	46.0	-21.6	1.00 V	282	29.60	-5.20
5	802.18	26.9 QP	46.0	-19.1	1.25 V	180	29.10	-2.20
6	918.60	29.9 QP	46.0	-16.1	1.50 V	63	29.60	0.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

Tested Date: Oct. 19, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 17, 2013	Jul. 16, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

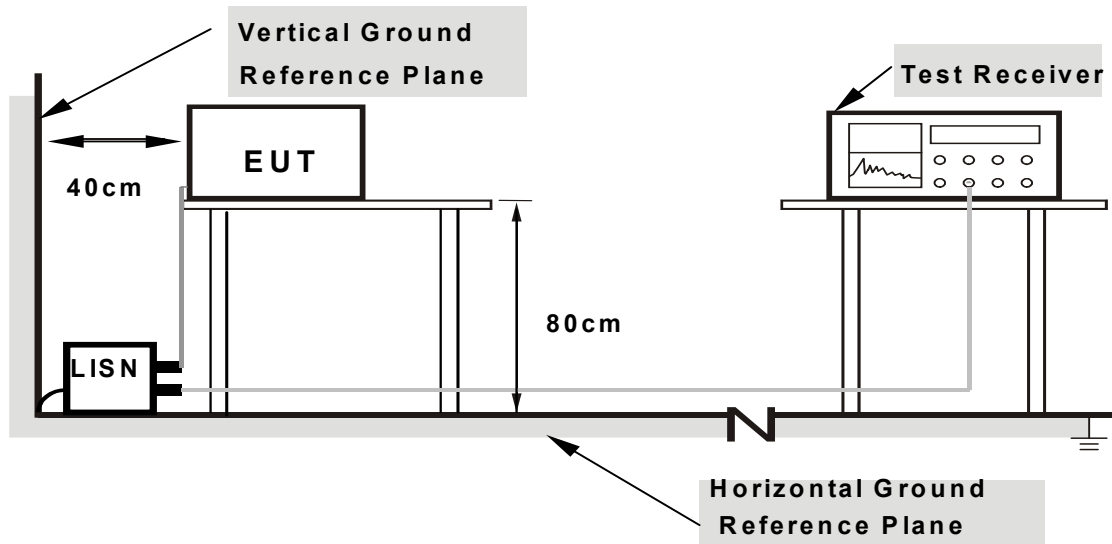

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS

CONDUCTED WORST CASE DATA: 8DPSK

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.42734	0.21	29.39	19.65	29.60	19.86	57.30	47.30	-27.70	-27.44
2	0.51328	0.22	28.99	12.67	29.21	12.89	56.00	46.00	-26.79	-33.11
3	0.63438	0.23	26.93	8.92	27.16	9.15	56.00	46.00	-28.84	-36.85
4	0.89219	0.26	24.00	7.01	24.26	7.27	56.00	46.00	-31.74	-38.73
5	1.63281	0.28	23.48	4.74	23.76	5.02	56.00	46.00	-32.24	-40.98
6	7.12109	0.40	23.60	5.10	24.00	5.50	60.00	50.00	-36.00	-44.50


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

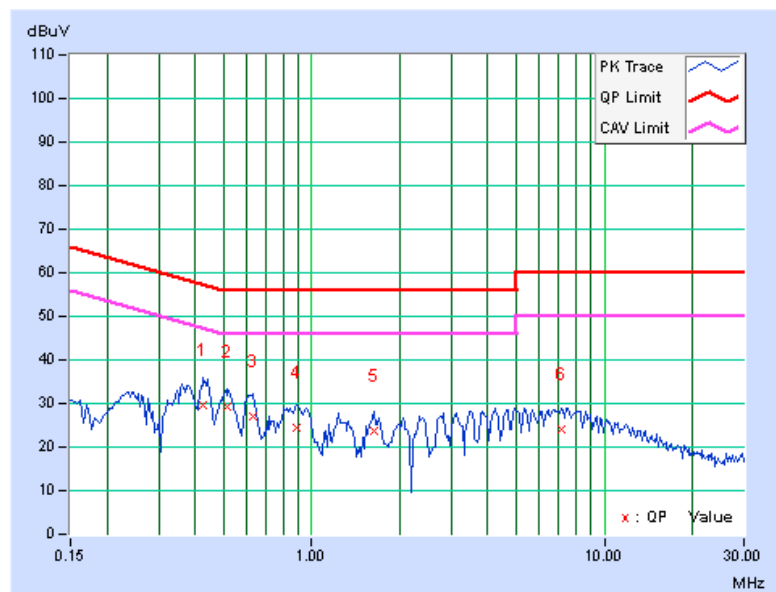

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.35703	0.23	21.23	5.37	21.46	5.60	58.80	48.80	-37.33	-43.19
2	0.43516	0.25	23.21	11.08	23.46	11.33	57.15	47.15	-33.69	-35.82
3	0.52891	0.25	21.41	2.28	21.66	2.53	56.00	46.00	-34.34	-43.47
4	0.60313	0.24	21.97	2.47	22.21	2.71	56.00	46.00	-33.79	-43.29
5	1.72266	0.27	15.47	-0.82	15.74	-0.55	56.00	46.00	-40.26	-46.55
6	8.14063	0.45	15.71	-5.07	16.16	-4.62	60.00	50.00	-43.84	-54.62


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

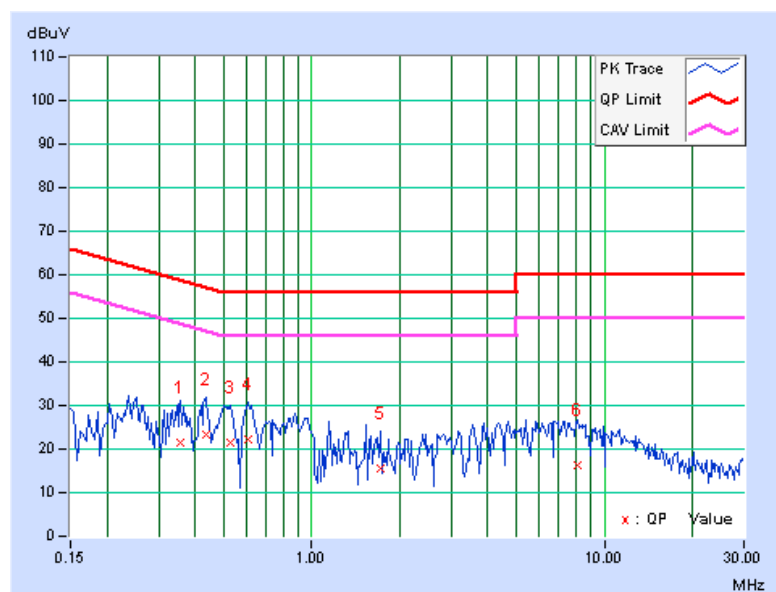

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36875	0.20	28.48	14.76	28.68	14.96	58.53	48.53	-29.85	-33.57
2	0.43906	0.21	29.87	19.46	30.08	19.67	57.08	47.08	-27.00	-27.41
3	0.52109	0.22	28.87	14.25	29.09	14.47	56.00	46.00	-26.91	-31.53
4	0.63047	0.23	27.98	12.06	28.21	12.29	56.00	46.00	-27.79	-33.71
5	2.06641	0.28	23.29	6.95	23.57	7.23	56.00	46.00	-32.43	-38.77
6	7.28125	0.40	24.51	9.18	24.91	9.58	60.00	50.00	-35.09	-40.42


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

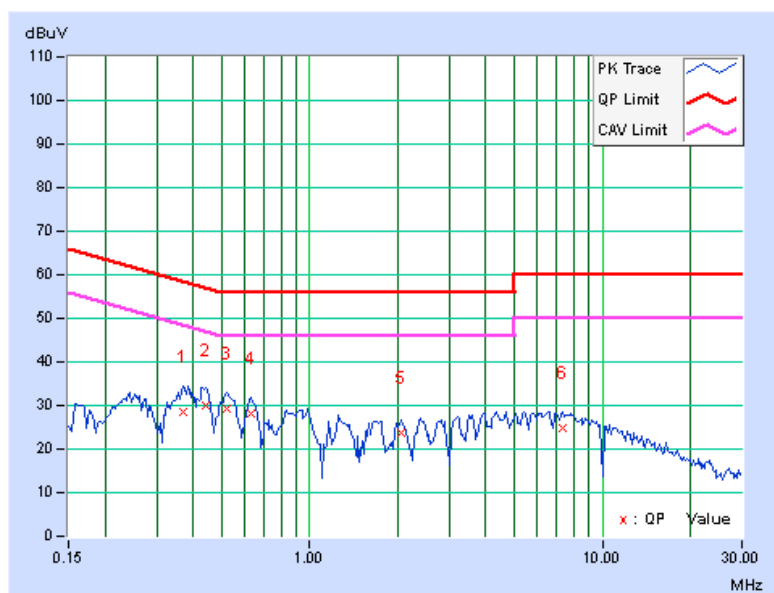

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36484	0.24	24.24	9.08	24.48	9.32	58.62	48.62	-34.14	-39.30
2	0.43516	0.25	24.71	14.26	24.96	14.51	57.15	47.15	-32.19	-32.64
3	0.52109	0.25	23.93	7.60	24.18	7.85	56.00	46.00	-31.82	-38.15
4	0.63828	0.24	22.86	4.87	23.10	5.11	56.00	46.00	-32.90	-40.89
5	1.73828	0.27	17.42	0.76	17.69	1.03	56.00	46.00	-38.31	-44.97
6	6.57813	0.43	19.91	2.46	20.34	2.89	60.00	50.00	-39.66	-47.11


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

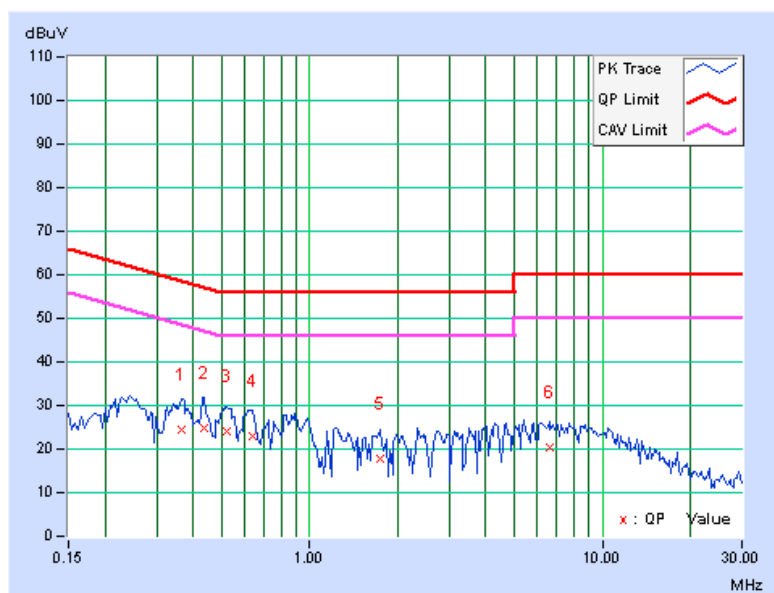

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.20	18.91	7.09	19.11	7.29	63.74	53.74	-44.63	-46.45
2	0.40000	0.22	25.56	13.07	25.78	13.29	57.85	47.85	-32.07	-34.56
3	0.83359	0.27	18.00	5.25	18.27	5.52	56.00	46.00	-37.73	-40.48
4	2.50781	0.34	9.85	-1.80	10.19	-1.46	56.00	46.00	-45.81	-47.46
5	5.28516	0.42	17.66	3.79	18.08	4.21	60.00	50.00	-41.92	-45.79
6	9.41016	0.48	12.08	-0.36	12.56	0.12	60.00	50.00	-47.44	-49.88


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

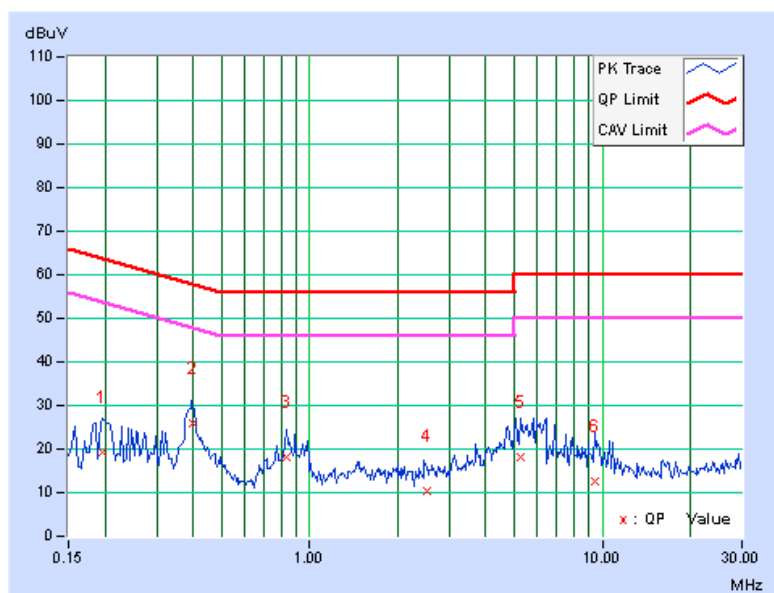

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.19	19.75	6.14	19.94	6.33	63.91	53.91	-43.97	-47.58
2	0.38828	0.27	24.38	8.45	24.65	8.72	58.10	48.10	-33.46	-39.39
3	0.82578	0.26	14.54	0.26	14.80	0.52	56.00	46.00	-41.20	-45.48
4	1.75781	0.31	7.54	-2.77	7.85	-2.46	56.00	46.00	-48.15	-48.46
5	4.75391	0.47	18.44	5.37	18.91	5.84	56.00	46.00	-37.09	-40.16
6	10.75781	0.59	14.21	1.21	14.80	1.80	60.00	50.00	-45.20	-48.20


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

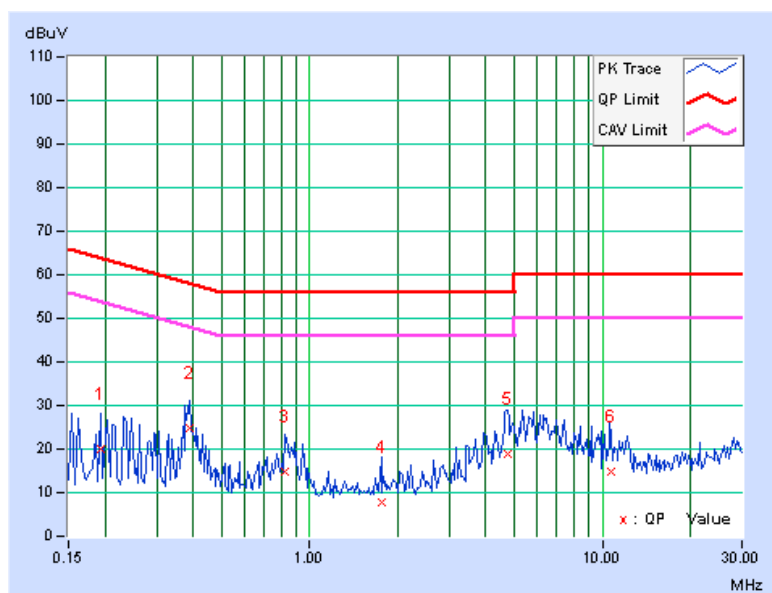

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.19	20.83	8.85	21.02	9.04	64.79	54.79	-43.77	-45.75
2	0.40000	0.22	26.15	16.04	26.37	16.26	57.85	47.85	-31.48	-31.59
3	0.82969	0.27	18.01	4.79	18.28	5.06	56.00	46.00	-37.72	-40.94
4	2.96094	0.36	11.17	1.98	11.53	2.34	56.00	46.00	-44.47	-43.66
5	5.75000	0.43	18.68	5.69	19.11	6.12	60.00	50.00	-40.89	-43.88
6	10.53906	0.50	12.54	1.57	13.04	2.07	60.00	50.00	-46.96	-47.93


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

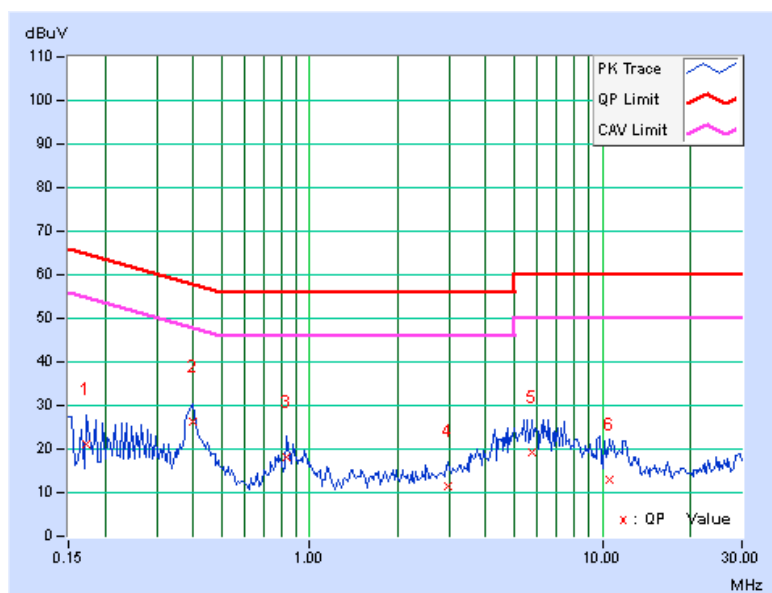

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.19	21.73	6.46	21.92	6.65	64.61	54.61	-42.69	-47.96
2	0.38828	0.27	25.14	10.51	25.41	10.78	58.10	48.10	-32.70	-37.33
3	0.83359	0.26	18.30	3.69	18.56	3.95	56.00	46.00	-37.44	-42.05
4	1.87500	0.31	9.41	-1.36	9.72	-1.05	56.00	46.00	-46.28	-47.05
5	5.47266	0.48	21.11	8.24	21.59	8.72	60.00	50.00	-38.41	-41.28
6	9.91016	0.57	15.33	3.81	15.90	4.38	60.00	50.00	-44.10	-45.62

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

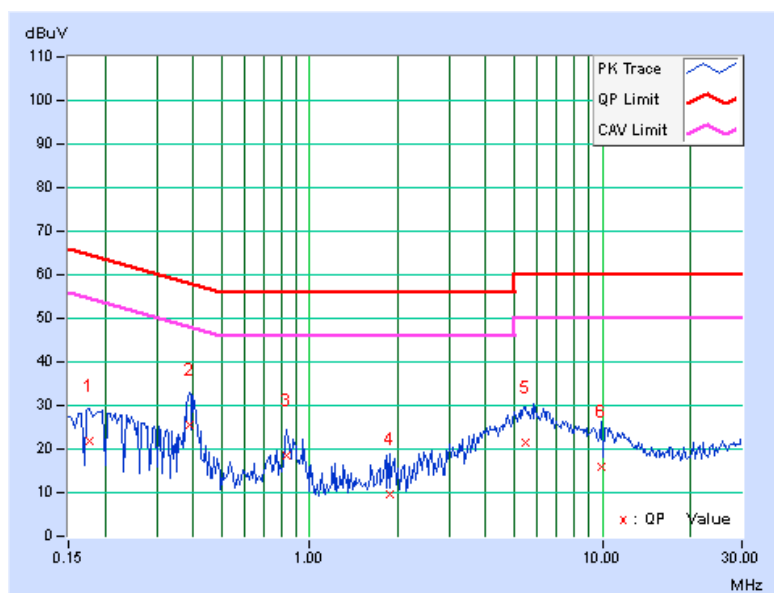


4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.





A D T

GFSK

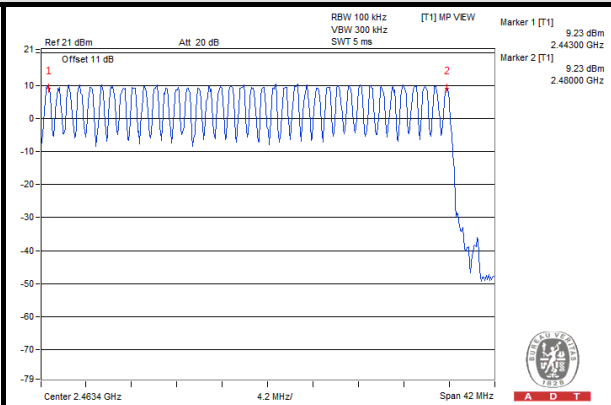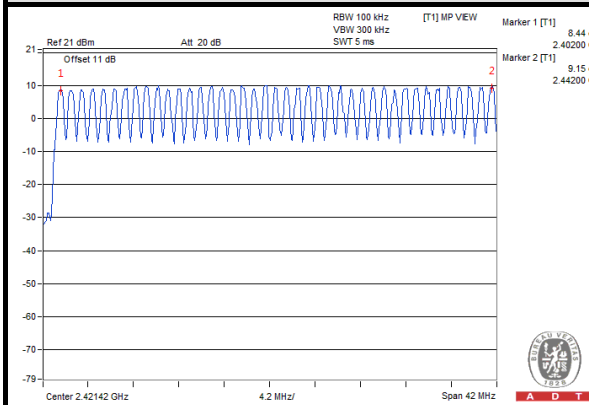

8DPSK

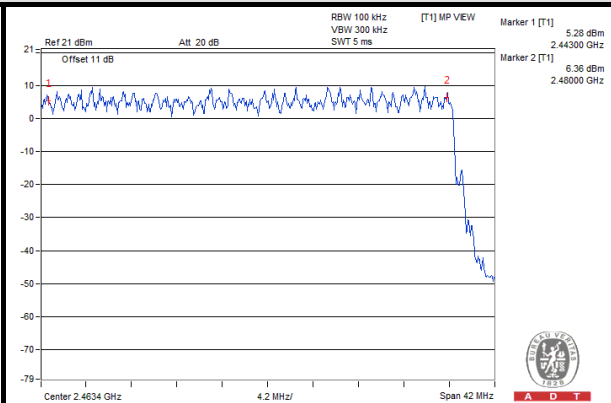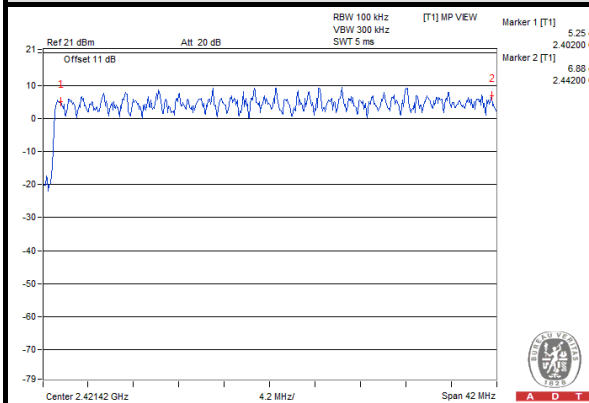


4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 TEST RESULTS

GFSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.456	144.1	400
DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.76	289.2	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.01	323.4	400

NOTE: Test plots of the transmitting time slot are shown on next page.




A D T


DH1

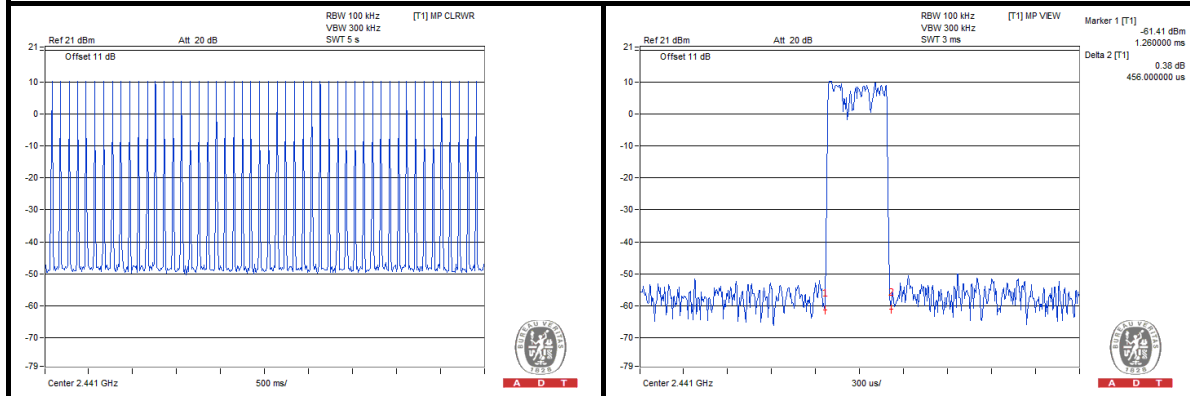

DH3

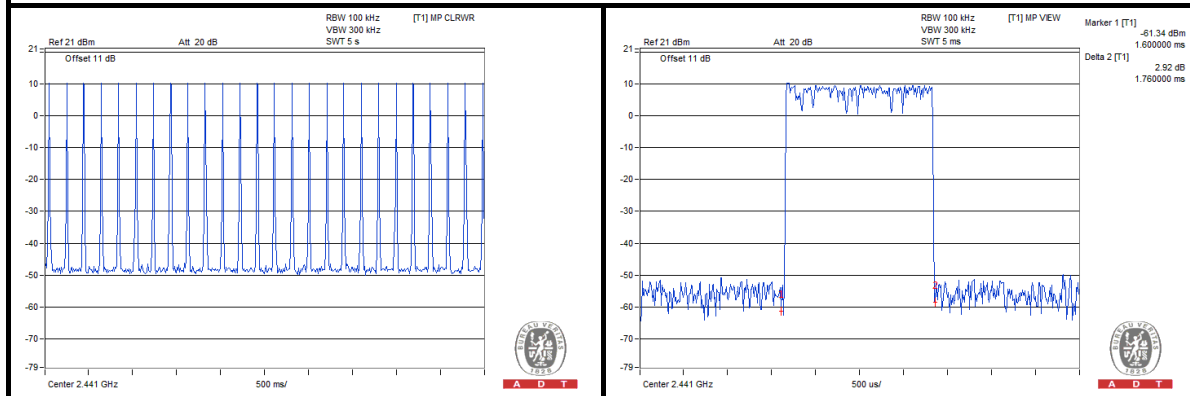

DH5

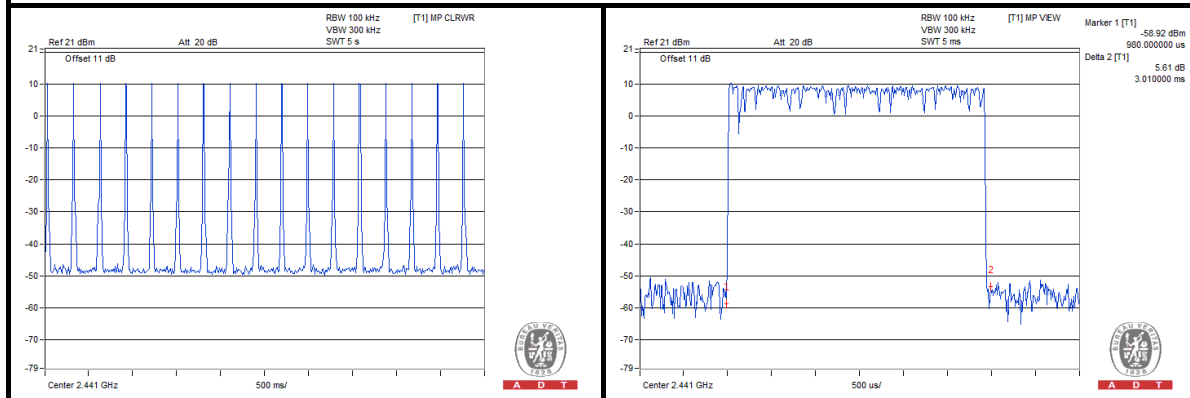

8DPSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.492	158.6	400
DH3	25 (times / 5 sec) * 6.32 = 158.00 times	1.76	278.1	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.99	321.2	400

NOTE: Test plots of the transmitting time slot are shown on next page.




A D T


DH1

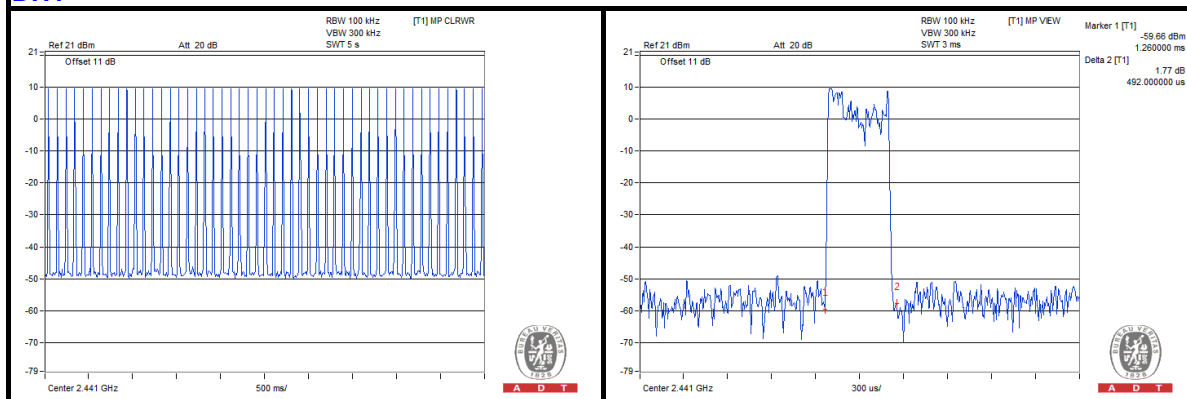

DH3

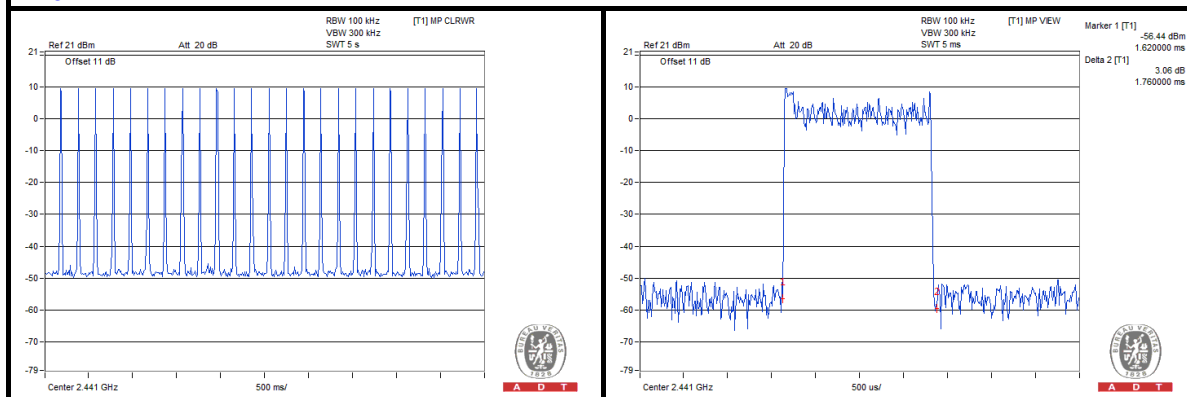

DH5

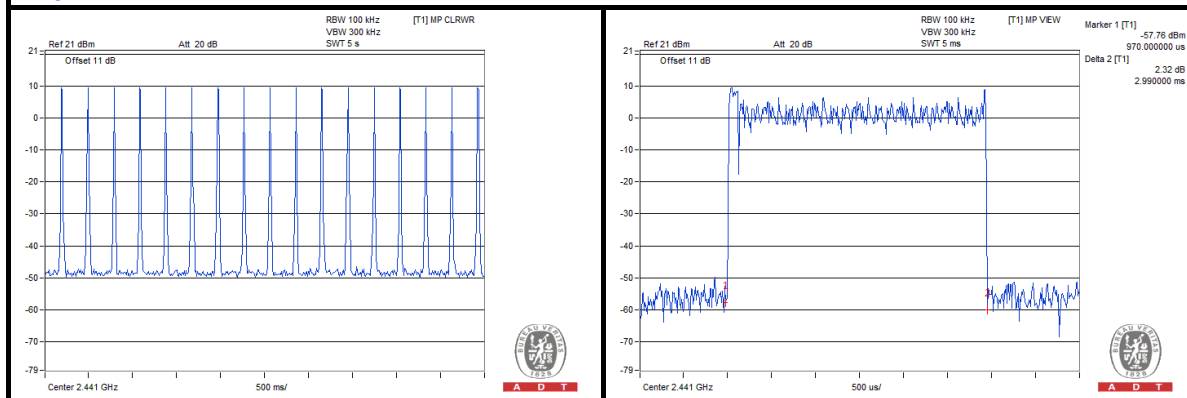


4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD


No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	
		GFSK	8DPSK
0	2402	0.93	1.30
39	2441	0.96	1.27
78	2480	0.93	1.28

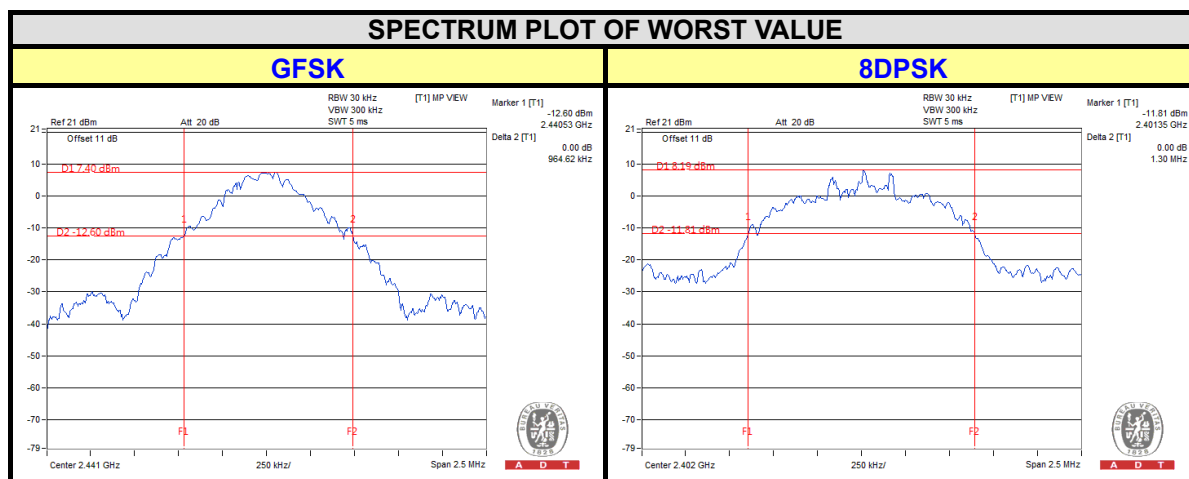


4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.


4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)		20dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)		PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.01	1.00	0.93	1.30	0.62	0.87	PASS
39	2441	1.01	1.00	0.96	1.27	0.64	0.85	PASS
78	2480	1.01	1.00	0.93	1.28	0.62	0.85	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.

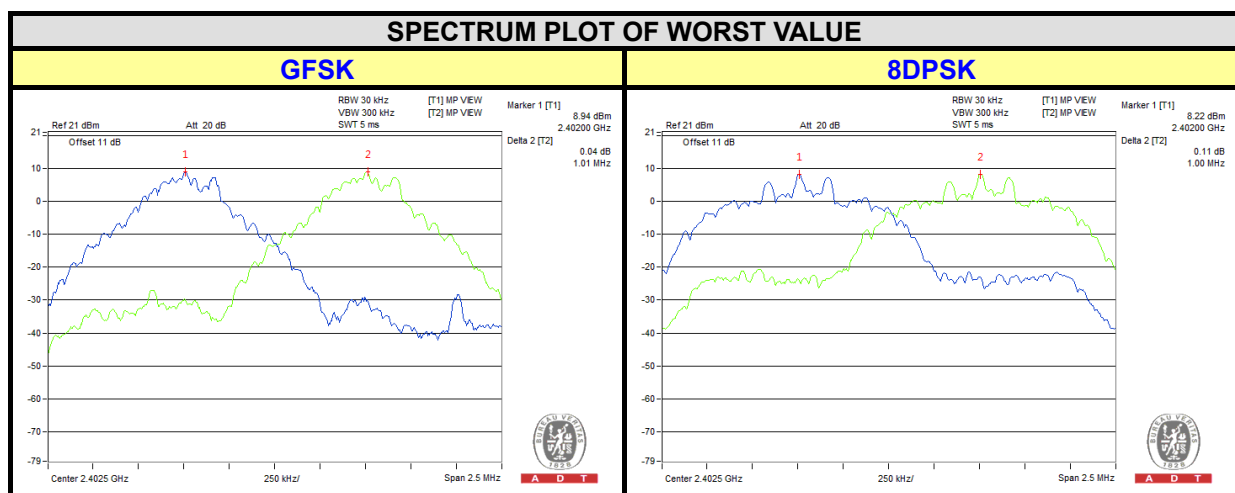


4.7 MAXIMUM OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP



4.7.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.7.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.5 DEVIATION FROM TEST STANDARD


No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	OUTPUT POWER (mW)		OUTPUT POWER (dBm)		POWER LIMIT (mW)	PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	9.376	9.247	9.72	9.66	125	PASS
39	2441	9.441	9.333	9.75	9.70	125	PASS
78	2480	9.550	9.484	9.80	9.77	125	PASS

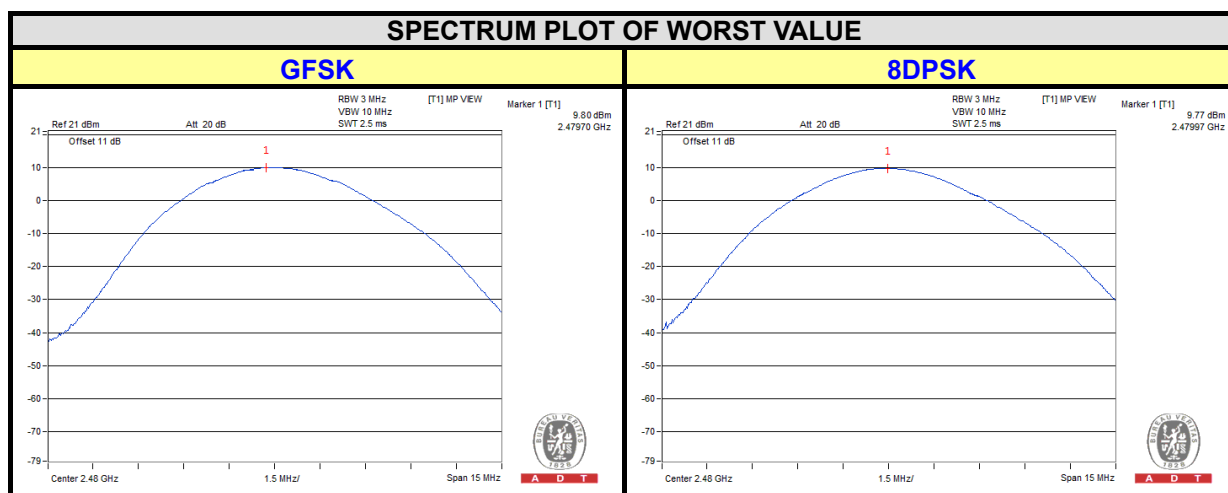

4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.8.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit continuously.

4.8.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled_Low Channel

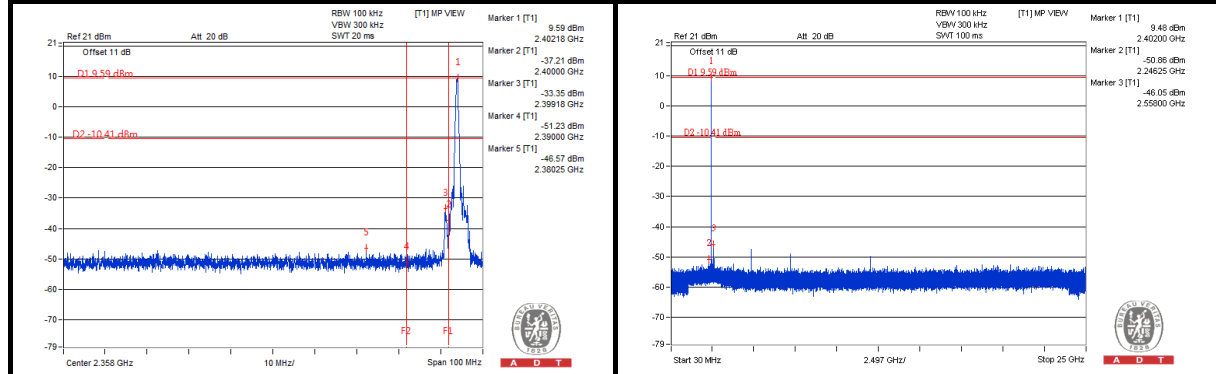


Hopping disabled_High Channel

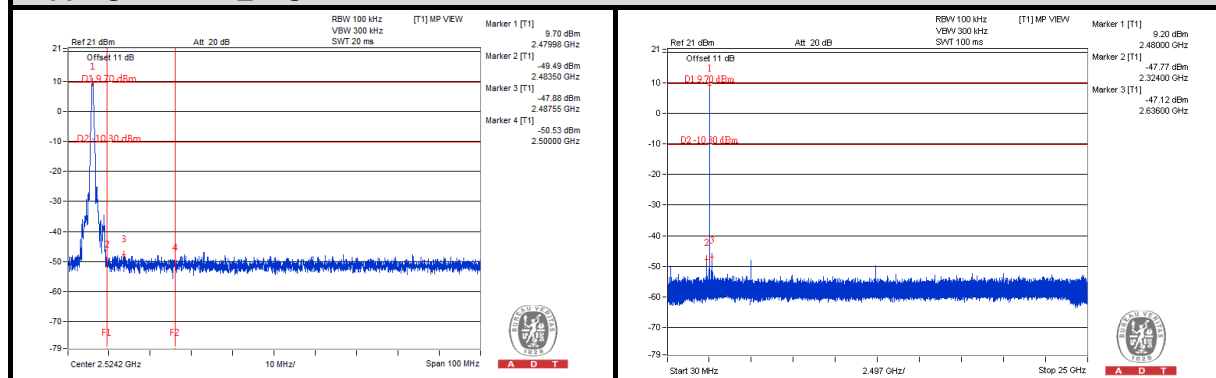

Hopping enabled_Low Channel

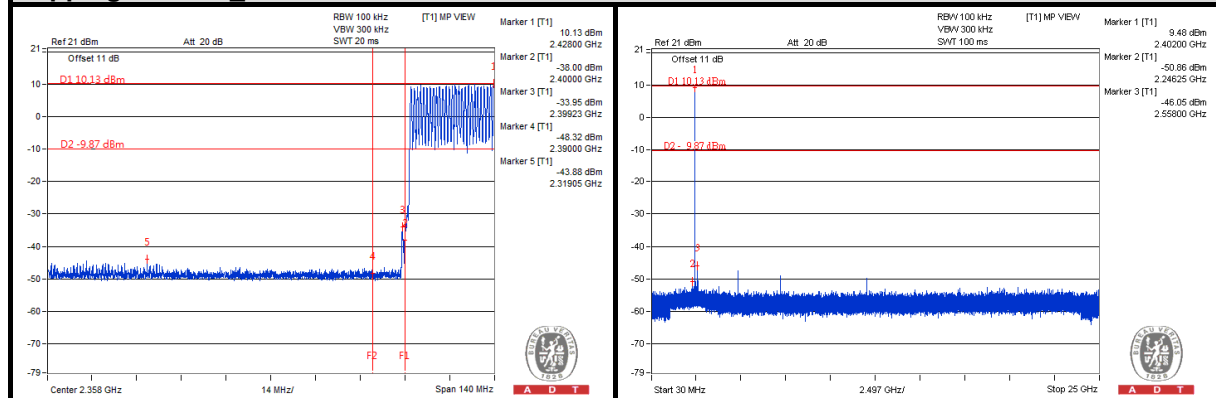

Hopping enabled_High Channel


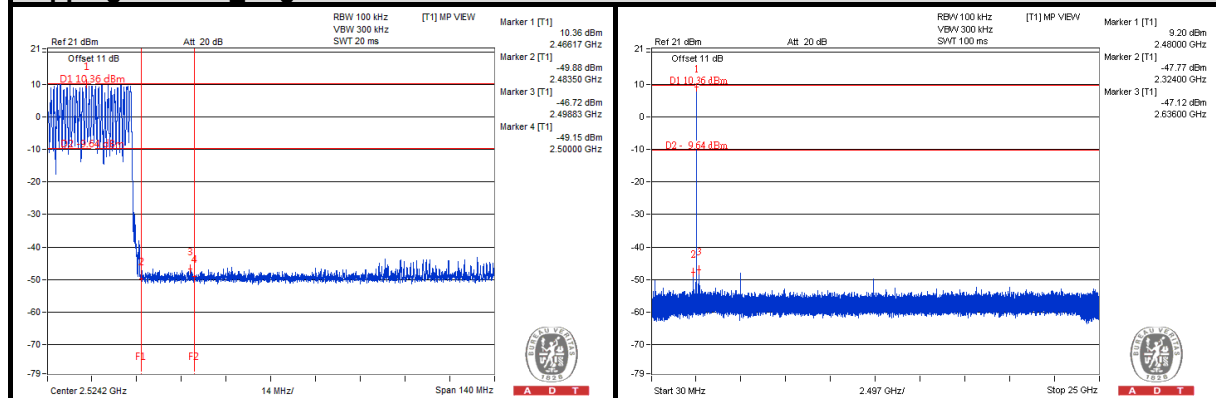






A D T

8DPSK



Hopping disabled_Low Channel

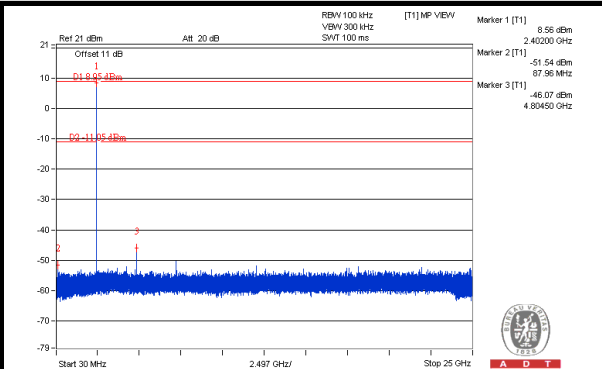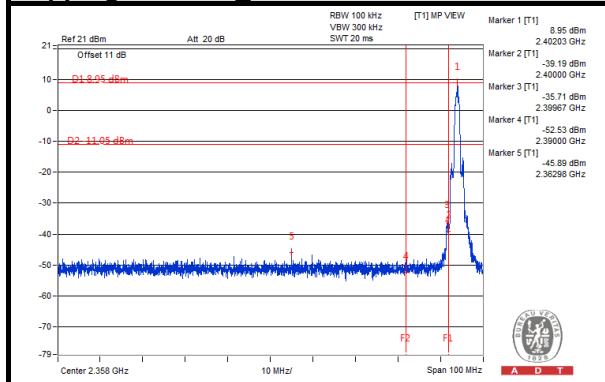



Hopping disabled_High Channel

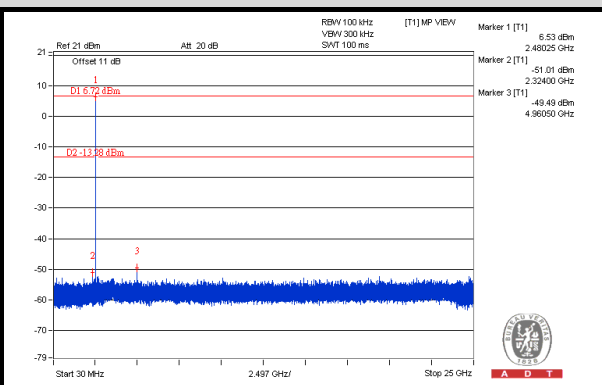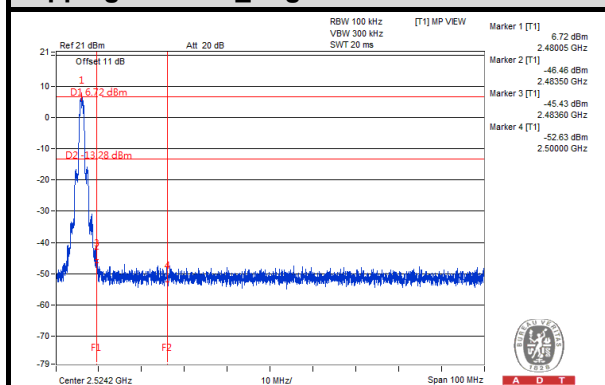

Hopping enabled_Low Channel

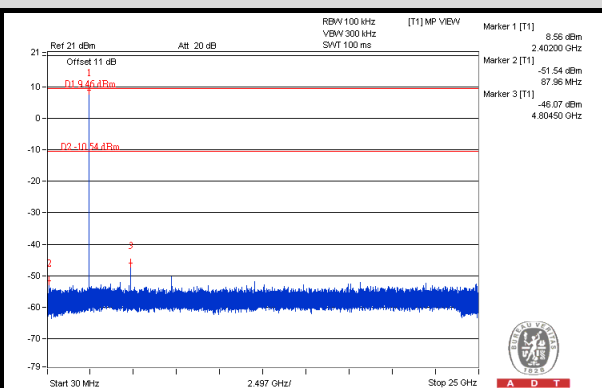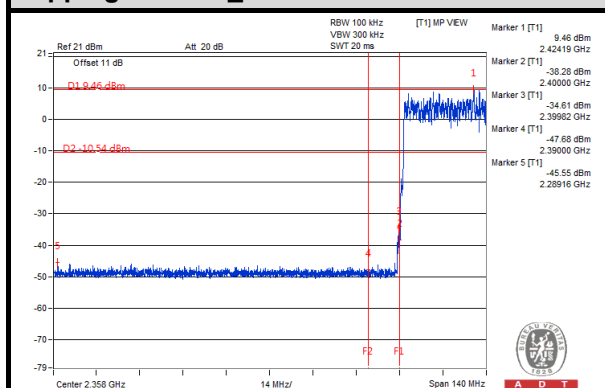

Hopping enabled_High Channel

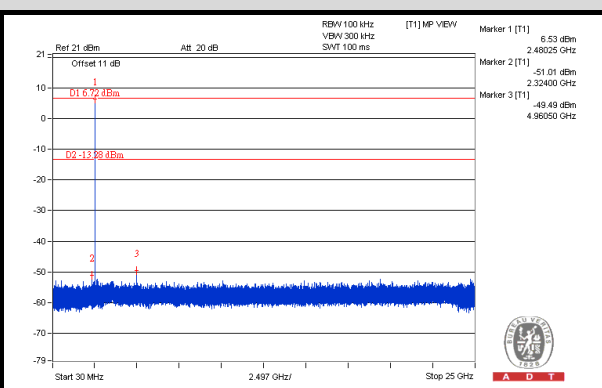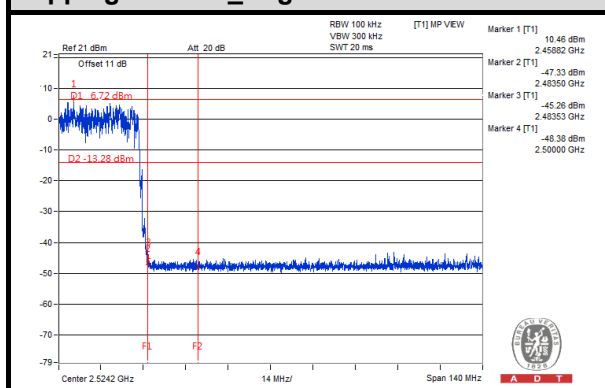

5. TEST TYPES AND RESULTS (FOR Bluetooth LE 4.0)

5.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Same as 4.1.1.

5.1.2 TEST INSTRUMENTS

Same as 4.1.2.

5.1.3 TEST PROCEDURES

Same as 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

5.1.7 TEST RESULTS

ABOVE 1GHz DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	1.43 H	187	23.60	31.00
2	2390.00	43.2 AV	54.0	-10.8	1.43 H	187	12.20	31.00
3	*2402.00	103.2 PK			1.42 H	186	72.10	31.10
4	*2402.00	98.4 AV			1.42 H	186	67.30	31.10
5	4804.00	52.6 PK	74.0	-21.4	1.47 H	152	48.10	4.50
6	4804.00	44.0 AV	54.0	-10.0	1.47 H	152	39.50	4.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.25 V	346	23.10	31.00
2	2390.00	43.5 AV	54.0	-10.5	1.25 V	346	12.50	31.00
3	*2402.00	96.9 PK			1.25 V	346	65.80	31.10
4	*2402.00	92.3 AV			1.25 V	346	61.20	31.10
5	4804.00	54.4 PK	74.0	-19.6	1.10 V	47	49.90	4.50
6	4804.00	46.1 AV	54.0	-7.9	1.10 V	47	41.60	4.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 19	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	103.5 PK			1.37 H	260	72.20	31.30
2	*2440.00	99.0 AV			1.37 H	260	67.70	31.30
3	4880.00	52.4 PK	74.0	-21.6	1.18 H	154	47.60	4.80
4	4880.00	43.9 AV	54.0	-10.1	1.18 H	154	39.10	4.80
5	7320.00	52.2 PK	74.0	-21.8	1.38 H	201	40.90	11.30
6	7320.00	39.7 AV	54.0	-14.3	1.38 H	201	28.40	11.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1880.00	43.3 PK	74.0	-30.7	1.00 V	320	47.60	-4.30
2	1880.00	34.2 AV	54.0	-19.8	1.00 V	320	38.50	-4.30
3	*2440.00	98.7 PK			1.00 V	259	67.40	31.30
4	*2440.00	94.1 AV			1.00 V	259	62.80	31.30
5	7320.00	52.4 PK	74.0	-21.6	1.08 V	56	41.10	11.30
6	7320.00	40.4 AV	54.0	-13.6	1.08 V	56	29.10	11.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	105.9 PK			1.34 H	50	74.50	31.40
2	*2480.00	101.1 AV			1.34 H	50	69.70	31.40
3	2483.50	64.4 PK	74.0	-9.6	1.34 H	50	33.00	31.40
4	2483.50	52.6 AV	54.0	-1.4	1.34 H	50	21.20	31.40
5	4960.00	54.0 PK	74.0	-20.0	1.16 H	153	48.90	5.10
6	4960.00	45.4 AV	54.0	-8.6	1.16 H	153	40.30	5.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.6 PK			1.22 V	343	68.20	31.40
2	*2480.00	95.1 AV			1.22 V	343	63.70	31.40
3	2483.50	60.2 PK	74.0	-13.8	1.30 V	350	28.80	31.40
4	2483.50	48.3 AV	54.0	-5.7	1.30 V	350	16.90	31.40
5	4960.00	53.9 PK	74.0	-20.1	1.51 V	72	48.80	5.10
6	4960.00	45.4 AV	54.0	-8.6	1.51 V	72	40.30	5.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.78	28.9 QP	40.0	-11.1	1.25 H	106	44.90	-16.00
2	124.98	26.8 QP	43.5	-16.7	1.00 H	290	42.60	-15.80
3	363.65	28.6 QP	46.0	-17.4	1.50 H	186	39.90	-11.30
4	577.09	21.5 QP	46.0	-24.5	1.00 H	262	28.60	-7.10
5	757.55	25.5 QP	46.0	-20.5	1.25 H	293	28.70	-3.20
6	873.97	29.5 QP	46.0	-16.5	1.50 H	211	31.00	-1.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.48	32.1 QP	40.0	-7.9	1.25 V	148	46.40	-14.30
2	124.98	25.7 QP	43.5	-17.8	1.00 V	260	41.50	-15.80
3	167.67	17.3 QP	43.5	-26.2	1.50 V	66	31.60	-14.30
4	377.23	19.2 QP	46.0	-26.8	1.00 V	238	30.10	-10.90
5	608.14	22.6 QP	46.0	-23.4	1.25 V	61	28.70	-6.10
6	872.03	28.7 QP	46.0	-17.3	1.50 V	127	30.30	-1.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 72%RH	TESTED BY	Chris Lin
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.0 QP	40.0	-13.0	1.25 H	117	41.80	-14.80
2	111.40	24.1 QP	43.5	-19.4	1.00 H	221	41.10	-17.00
3	371.41	27.4 QP	46.0	-18.6	1.50 H	351	38.50	-11.10
4	633.36	22.9 QP	46.0	-23.1	1.25 H	309	28.40	-5.50
5	759.49	24.9 QP	46.0	-21.1	1.00 H	195	28.10	-3.20
6	951.59	28.4 QP	46.0	-17.6	1.50 H	7	28.30	0.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.48	33.4 QP	40.0	-6.6	1.25 V	35	47.70	-14.30
2	111.40	23.6 QP	43.5	-19.9	1.00 V	92	40.60	-17.00
3	258.87	18.9 QP	46.0	-27.1	1.50 V	174	32.90	-14.00
4	464.55	20.2 QP	46.0	-25.8	1.00 V	173	29.30	-9.10
5	650.83	23.5 QP	46.0	-22.5	1.25 V	185	29.00	-5.50
6	872.03	31.0 QP	46.0	-15.0	1.50 V	250	32.60	-1.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	D		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.1 QP	40.0	-12.9	1.99 H	204	41.90	-14.80
2	159.91	15.7 QP	43.5	-27.8	1.00 H	37	29.40	-13.70
3	363.65	26.2 QP	46.0	-19.8	1.50 H	191	37.50	-11.30
4	495.60	21.9 QP	46.0	-24.1	1.99 H	198	30.60	-8.70
5	590.68	23.0 QP	46.0	-23.0	1.00 H	301	29.60	-6.60
6	633.36	23.5 QP	46.0	-22.5	1.24 H	236	29.00	-5.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.2 QP	40.0	-12.8	1.00 V	344	42.00	-14.80
2	136.62	20.2 QP	43.5	-23.3	1.24 V	231	34.80	-14.60
3	297.68	16.8 QP	46.0	-29.2	1.00 V	58	29.30	-12.50
4	425.74	19.2 QP	46.0	-26.8	1.50 V	178	29.20	-10.00
5	472.31	21.7 QP	46.0	-24.3	1.99 V	78	30.80	-9.10
6	606.20	23.7 QP	46.0	-22.3	1.00 V	204	29.90	-6.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	E		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.9 QP	40.0	-13.1	1.99 H	3	41.70	-14.80
2	171.55	16.9 QP	43.5	-26.6	1.00 H	46	31.00	-14.10
3	352.01	29.1 QP	46.0	-16.9	1.50 H	2	40.60	-11.50
4	423.80	24.4 QP	46.0	-21.6	1.00 H	209	34.50	-10.10
5	480.07	25.5 QP	46.0	-20.5	1.99 H	20	34.40	-8.90
6	631.42	24.8 QP	46.0	-21.2	1.24 H	332	30.40	-5.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.4 QP	40.0	-12.6	1.24 V	66	42.20	-14.80
2	156.03	15.4 QP	43.5	-28.1	1.00 V	270	29.30	-13.90
3	352.01	24.2 QP	46.0	-21.8	1.99 V	81	35.70	-11.50
4	423.80	24.1 QP	46.0	-21.9	1.50 V	261	34.20	-10.10
5	551.87	22.9 QP	46.0	-23.1	1.00 V	213	30.50	-7.60
6	635.30	25.7 QP	46.0	-20.3	1.99 V	167	31.20	-5.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 71%RH	TESTED BY	Chris Lin
TEST MODE	F		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.4 QP	40.0	-13.6	1.25 H	341	41.30	-14.90
2	157.97	15.9 QP	43.5	-27.6	1.00 H	310	30.00	-14.10
3	437.38	20.0 QP	46.0	-26.0	1.50 H	88	29.40	-9.40
4	623.66	24.2 QP	46.0	-21.8	1.25 H	141	29.70	-5.50
5	823.52	28.2 QP	46.0	-17.8	1.00 H	345	30.00	-1.80
6	924.42	29.8 QP	46.0	-16.2	1.50 H	11	29.50	0.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.2 QP	40.0	-13.8	1.25 V	130	41.10	-14.90
2	161.85	15.5 QP	43.5	-28.0	1.00 V	236	29.10	-13.60
3	365.59	18.9 QP	46.0	-27.1	1.50 V	9	29.90	-11.00
4	579.03	22.0 QP	46.0	-24.0	1.25 V	135	28.80	-6.80
5	730.38	26.0 QP	46.0	-20.0	1.00 V	220	29.80	-3.80
6	901.14	28.6 QP	46.0	-17.4	1.50 V	298	28.90	-0.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 71%RH	TESTED BY	Chris Lin
TEST MODE	G		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	26.9 QP	40.0	-13.1	1.25 H	25	41.80	-14.90
2	154.09	15.2 QP	43.5	-28.3	1.00 H	264	28.70	-13.50
3	315.14	18.2 QP	46.0	-27.8	1.50 H	355	30.10	-11.90
4	551.87	22.4 QP	46.0	-23.6	1.00 H	299	29.80	-7.40
5	751.73	25.6 QP	46.0	-20.4	1.25 H	106	28.60	-3.00
6	901.14	29.7 QP	46.0	-16.3	1.50 H	101	30.00	-0.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.36	33.4 QP	40.0	-6.6	1.25 V	168	47.90	-14.50
2	152.15	15.5 QP	43.5	-28.0	1.00 V	77	29.10	-13.60
3	299.62	16.3 QP	46.0	-29.7	1.50 V	271	28.60	-12.30
4	542.17	21.8 QP	46.0	-24.2	1.00 V	15	29.50	-7.70
5	724.56	25.2 QP	46.0	-20.8	1.50 V	65	29.00	-3.80
6	963.23	29.7 QP	54.0	-24.3	1.25 V	358	28.80	0.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

Same as 4.2.1.

5.2.2 TEST INSTRUMENTS

Same as 4.2.2.

5.2.3 TEST PROCEDURES

Same as 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.2.6.


5.2.7 TEST RESULTS

CONDUCTED WORST CASE DATA:

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.43516	0.21	28.24	16.26	28.45	16.47	57.15	47.15	-28.70	-30.68
2	0.52109	0.22	26.73	7.62	26.95	7.84	56.00	46.00	-29.05	-38.16
3	0.60313	0.23	26.68	6.99	26.91	7.22	56.00	46.00	-29.09	-38.78
4	0.97031	0.27	20.58	-0.78	20.85	-0.51	56.00	46.00	-35.15	-46.51
5	2.05469	0.28	21.64	-0.79	21.92	-0.51	56.00	46.00	-34.08	-46.51
6	7.10938	0.40	20.04	-2.64	20.44	-2.24	60.00	50.00	-39.56	-52.24


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

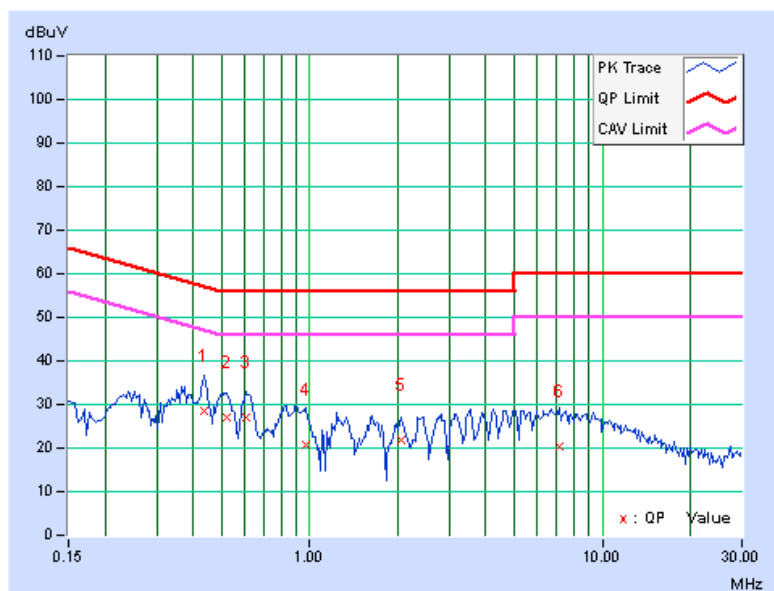

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.42734	0.25	23.58	11.07	23.83	11.32	57.30	47.30	-33.48	-35.99
2	0.51328	0.25	22.42	3.16	22.67	3.41	56.00	46.00	-33.33	-42.59
3	0.60703	0.24	22.35	2.27	22.59	2.51	56.00	46.00	-33.41	-43.49
4	0.83750	0.24	16.26	0.47	16.50	0.71	56.00	46.00	-39.50	-45.29
5	1.98828	0.28	14.82	-5.23	15.10	-4.95	56.00	46.00	-40.90	-50.95
6	7.66016	0.44	18.51	-2.43	18.95	-1.99	60.00	50.00	-41.05	-51.99


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

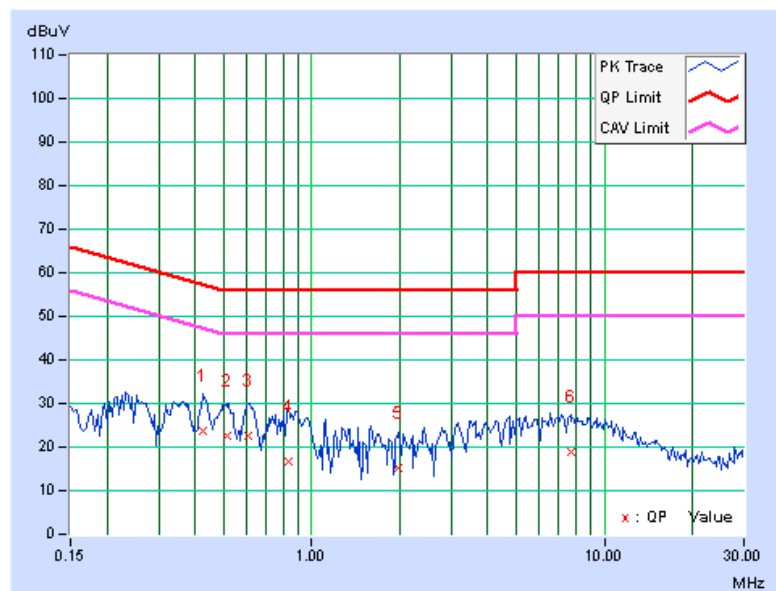

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.43125	0.21	28.58	16.93	28.79	17.14	57.23	47.23	-28.44	-30.09
2	0.51328	0.22	27.26	8.25	27.48	8.47	56.00	46.00	-28.52	-37.53
3	0.61094	0.23	27.03	6.91	27.26	7.14	56.00	46.00	-28.74	-38.86
4	0.89609	0.26	22.41	2.95	22.67	3.21	56.00	46.00	-33.33	-42.79
5	1.61719	0.28	21.12	-0.96	21.40	-0.68	56.00	46.00	-34.60	-46.68
6	6.96094	0.40	22.66	0.74	23.06	1.14	60.00	50.00	-36.94	-48.86


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

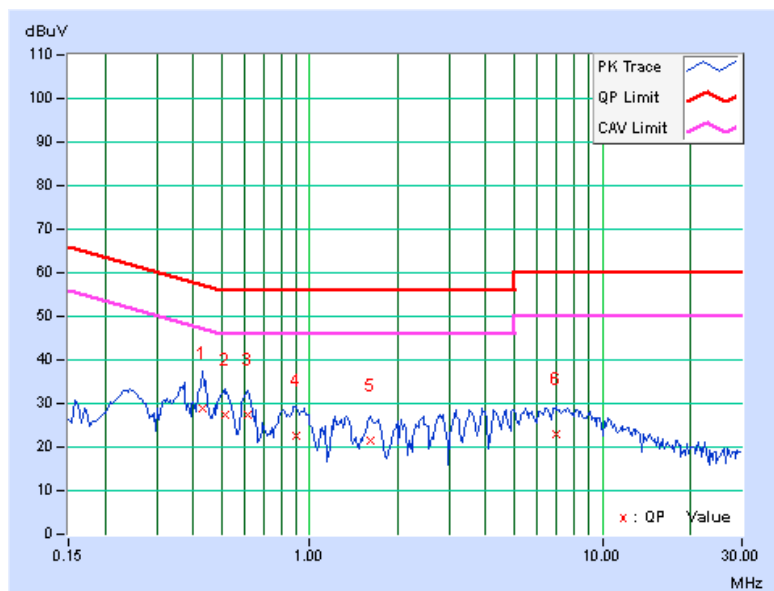

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.35703	0.23	21.51	5.49	21.74	5.72	58.80	48.80	-37.05	-43.07
2	0.43125	0.25	23.63	11.63	23.88	11.88	57.23	47.23	-33.35	-35.35
3	0.52109	0.25	22.04	3.04	22.29	3.29	56.00	46.00	-33.71	-42.71
4	0.61484	0.24	22.64	2.69	22.88	2.93	56.00	46.00	-33.12	-43.07
5	1.70703	0.27	15.83	3.61	16.10	3.88	56.00	46.00	-39.90	-42.12
6	7.52344	0.44	15.65	-5.37	16.09	-4.93	60.00	50.00	-43.91	-54.93


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

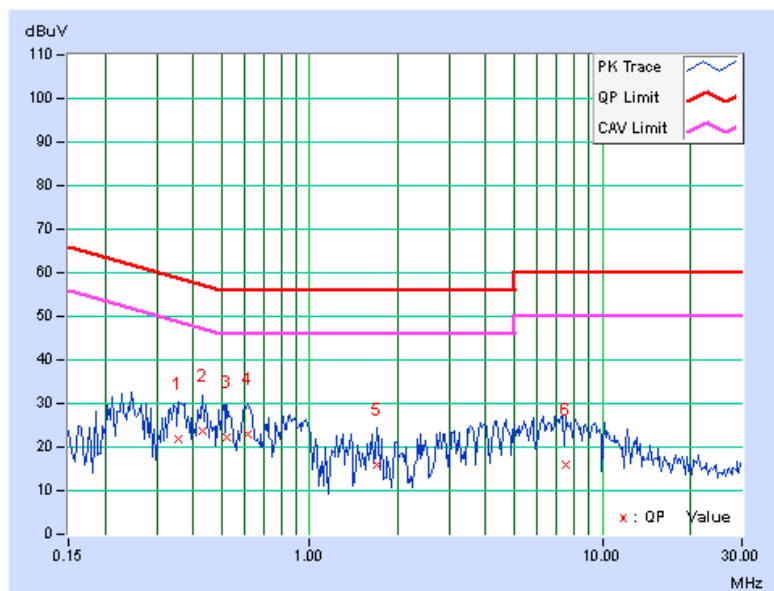

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.20	19.01	7.46	19.21	7.66	63.91	53.91	-44.70	-46.25
2	0.39219	0.22	26.46	13.15	26.68	13.37	58.02	48.02	-31.34	-34.65
3	0.88047	0.28	12.45	2.32	12.73	2.60	56.00	46.00	-43.27	-43.40
4	2.08984	0.32	10.60	0.14	10.92	0.46	56.00	46.00	-45.08	-45.54
5	5.19531	0.42	17.35	3.11	17.77	3.53	60.00	50.00	-42.23	-46.47
6	10.78125	0.51	11.25	-0.87	11.76	-0.36	60.00	50.00	-48.24	-50.36


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

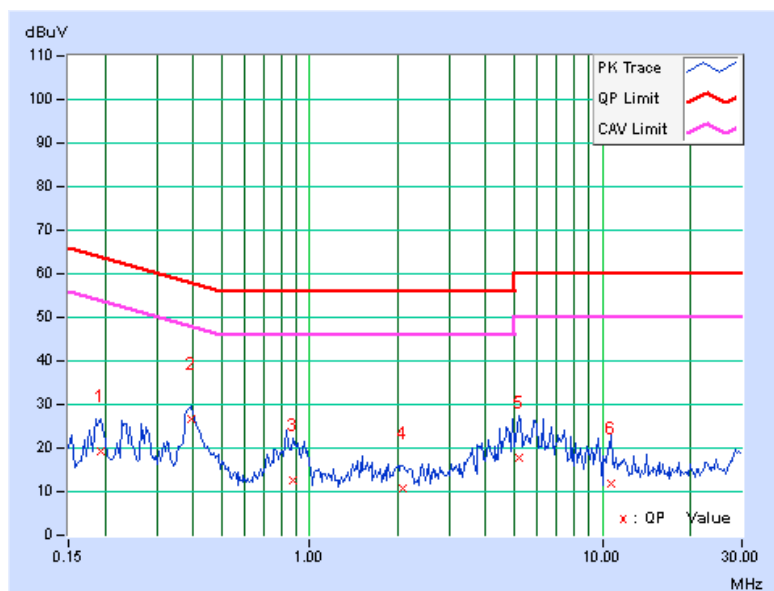

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.19	19.73	4.82	19.92	5.01	63.58	53.58	-43.66	-48.57
2	0.39219	0.27	24.59	10.40	24.86	10.67	58.02	48.02	-33.16	-37.35
3	0.82969	0.26	17.55	4.67	17.81	4.93	56.00	46.00	-38.19	-41.07
4	2.08984	0.33	7.60	-2.82	7.93	-2.49	56.00	46.00	-48.07	-48.49
5	5.35547	0.48	20.46	6.24	20.94	6.72	60.00	50.00	-39.06	-43.28
6	10.32031	0.58	14.59	0.90	15.17	1.48	60.00	50.00	-44.83	-48.52


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

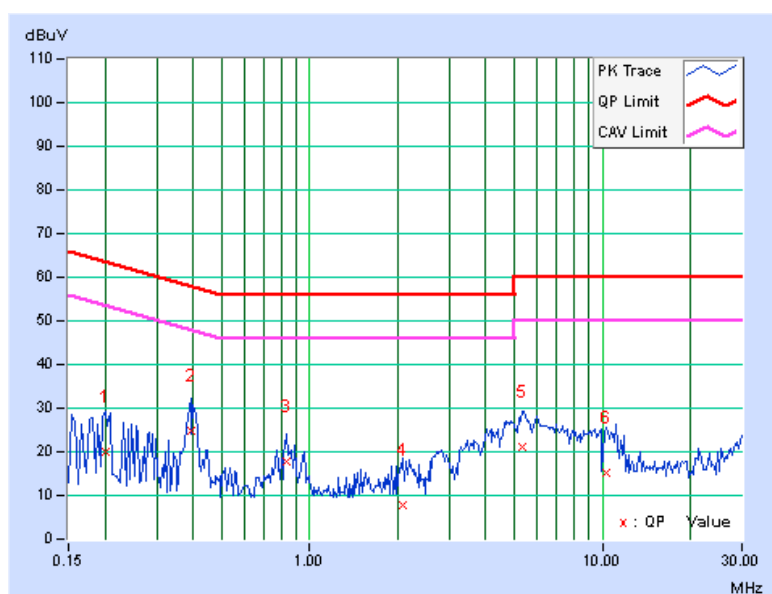

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.20	20.29	7.50	20.49	7.70	64.08	54.08	-43.59	-46.38
2	0.39219	0.22	26.92	16.22	27.14	16.44	58.02	48.02	-30.88	-31.58
3	0.83359	0.27	17.91	7.14	18.18	7.41	56.00	46.00	-37.82	-38.59
4	2.25781	0.33	9.50	2.08	9.83	2.41	56.00	46.00	-46.17	-43.59
5	5.25000	0.42	18.72	6.01	19.14	6.43	60.00	50.00	-40.86	-43.57
6	11.35938	0.52	11.08	0.69	11.60	1.21	60.00	50.00	-48.40	-48.79


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

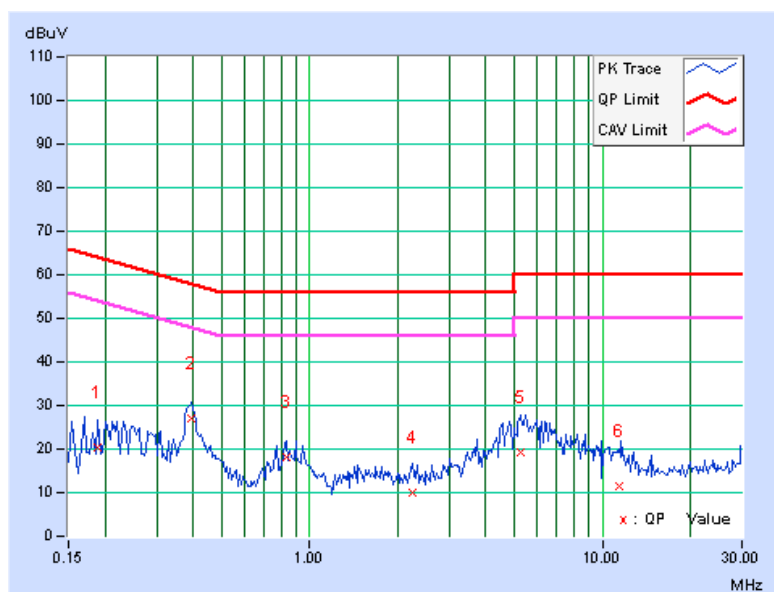

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	E		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20859	0.19	21.33	5.76	21.52	5.95	63.26	53.26	-41.74	-47.31
2	0.40000	0.27	24.92	10.76	25.19	11.03	57.85	47.85	-32.66	-36.82
3	0.83359	0.26	17.98	3.57	18.24	3.83	56.00	46.00	-37.76	-42.17
4	2.61328	0.36	11.13	-0.14	11.49	0.22	56.00	46.00	-44.51	-45.78
5	5.76172	0.49	21.04	8.05	21.53	8.54	60.00	50.00	-38.47	-41.46
6	11.21484	0.60	14.14	2.38	14.74	2.98	60.00	50.00	-45.26	-47.02

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

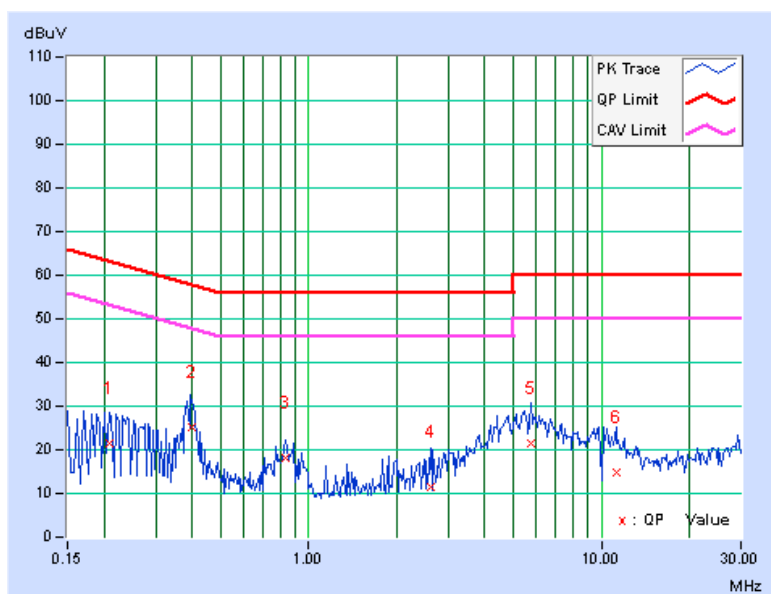


5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST SETUP



5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.5 DEVIATION FROM TEST STANDARD


No deviation.

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.3.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (KHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.70	0.5	PASS
19	2440	0.70	0.5	PASS
39	2480	0.70	0.5	PASS

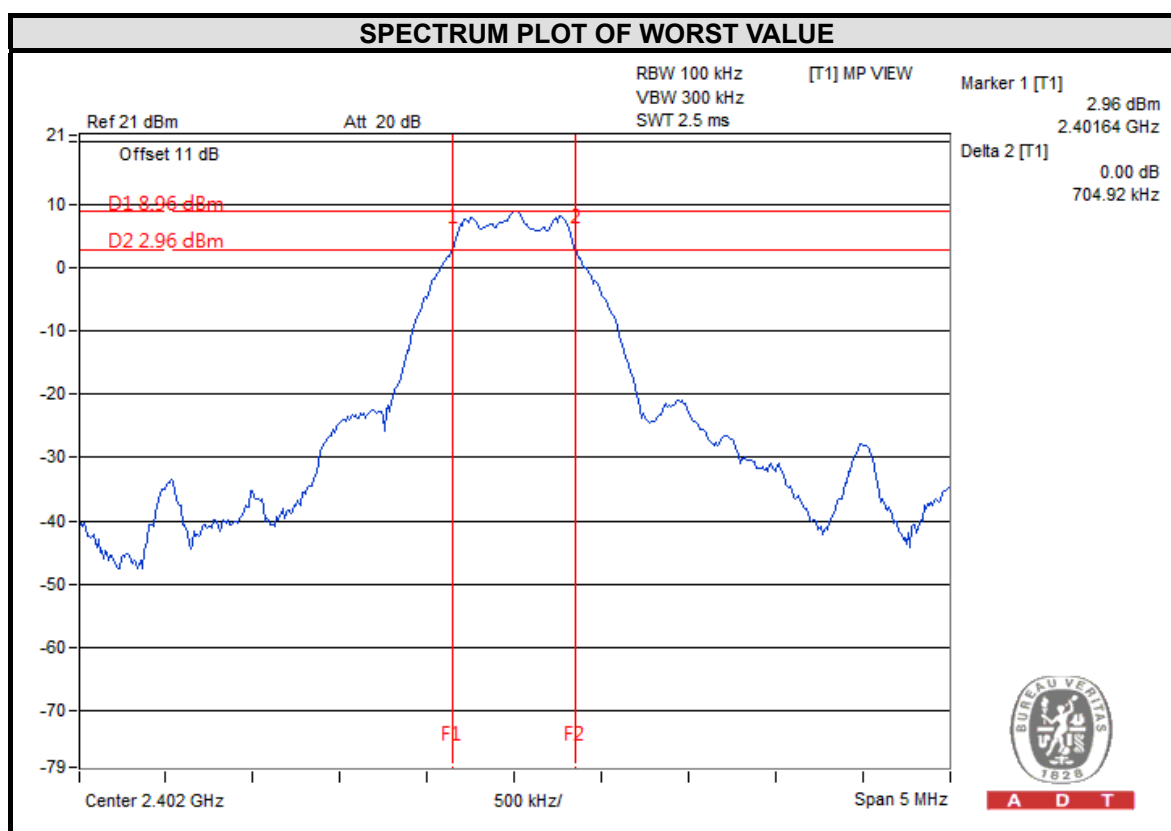


5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz: 1 Watt (30dBm)

5.4.2 TEST SETUP

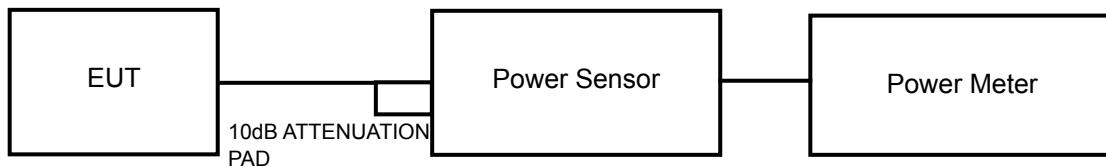

5.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

5.4.7 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
0	2402	9.120	9.60	30	PASS
19	2440	9.162	9.62	30	PASS
39	2480	9.204	9.64	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP



5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

5.5.5 DEVIATION FROM TEST STANDARD


No deviation.

5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.5.7 TEST RESULTS

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-6.80	8	PASS
19	2440	-6.04	8	PASS
39	2480	-5.73	8	PASS

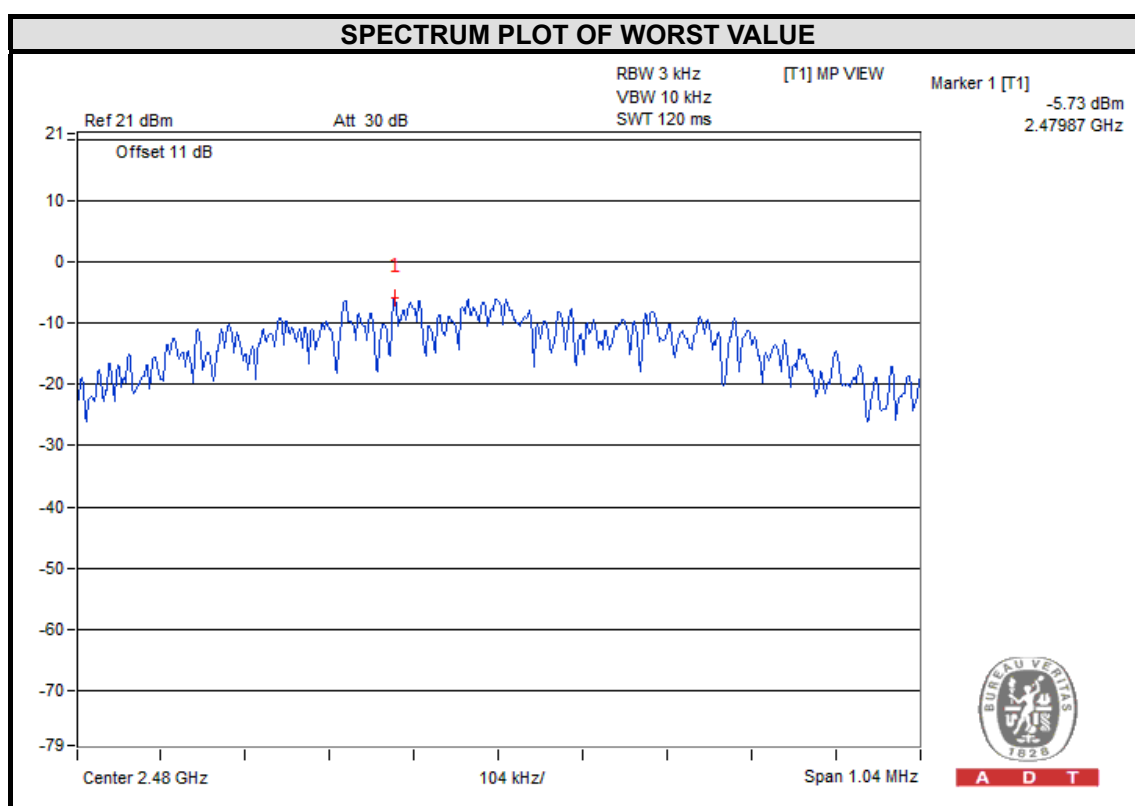


5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP



5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION


Same as Item 4.3.6

5.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

5.6.8 TEST RESULTS


CH 0

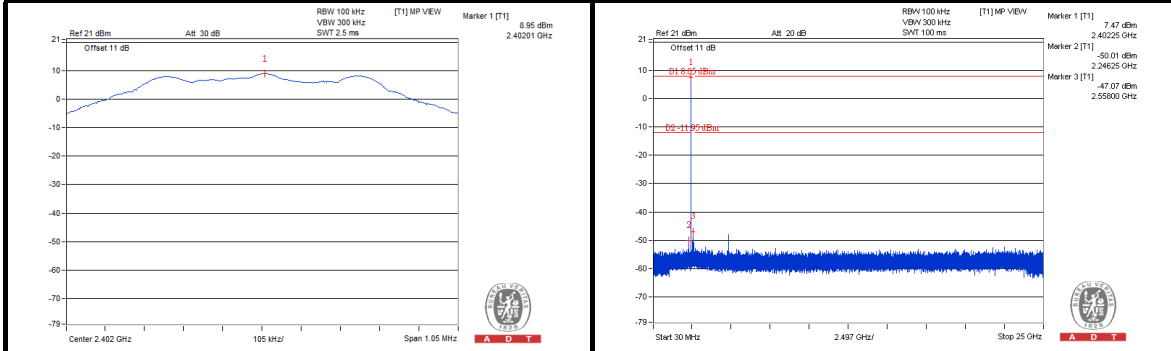


CH 19

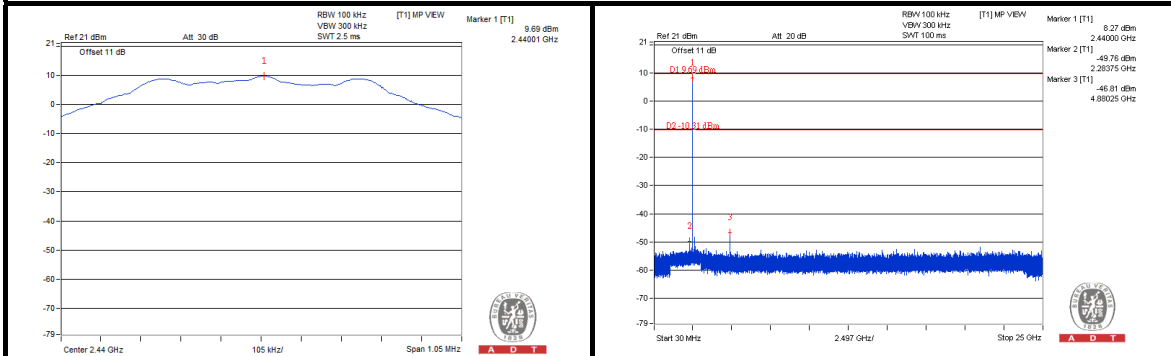


CH 39

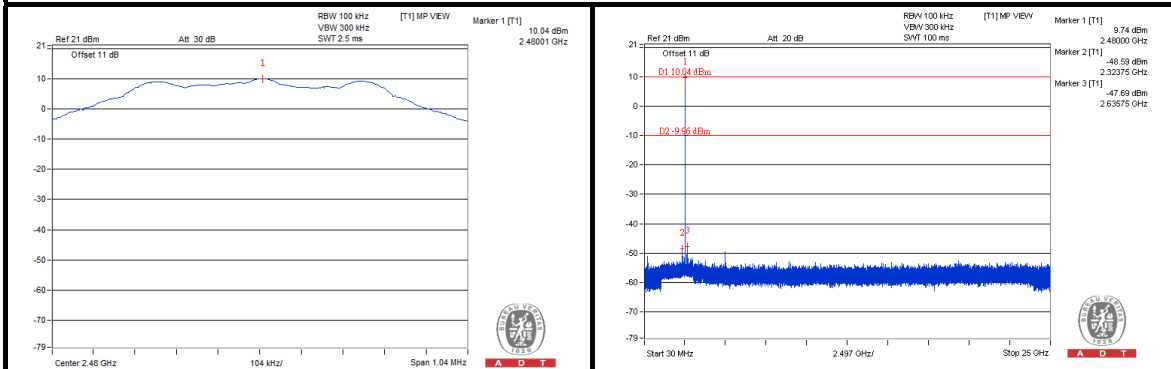

CH 0 Band edge

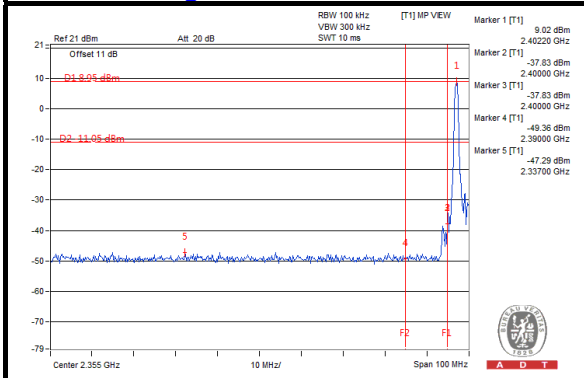

CH 39 Band edge

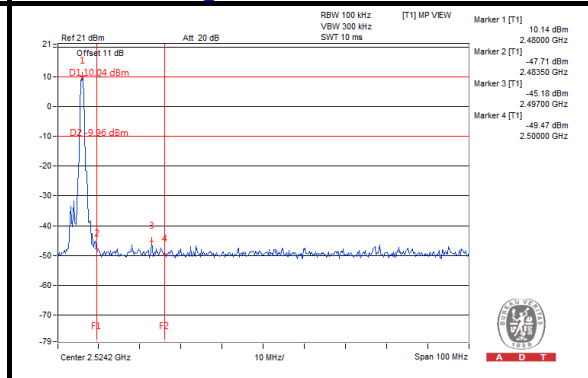

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---