


Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04

YAGEO GROUP
PULSE

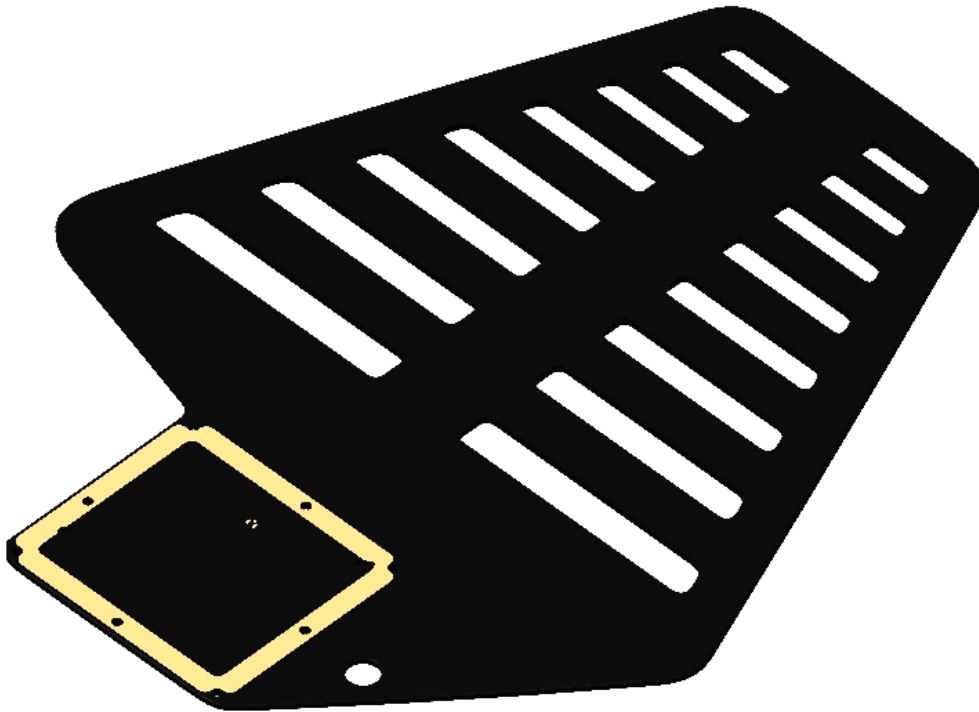

Features & Applications:

-  Directional antenna for wireless microphone systems
-  Operating frequency range 470 MHz to 698 MHz
-  Reduced wind load

Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04



Version Control		
Rev	Date	Description
0.1	2023-06-21	Initial release
0.2	2024-03-06	Update the header, adding the labels and other RF sections
0.3	2024-05-20	Update mechanical drawing, packing info and production line test setup
0.4	2024-05-31	Update the vacuum foil bag and carton box labels and packing spec

Electrical specifications ¹ @ 25° C			
Antenna type	Nominal Impedance	Polarization	Radiation pattern
LPDA	50Ω	Vertical	Directional

Mechanical / Environmental Specifications			
Dimension (Length x Width x Height)	Color	Weight	Material
349mm x 292.17mm x 3mm	Black	195g	FR4

Operating Temperature	Storage Temperature	RoHS-6 Compliant
-40°C to 85°C	-40°C to 85°C	Yes

Notes:

1. Measured with amplifier metal housing.




Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04



Drawing

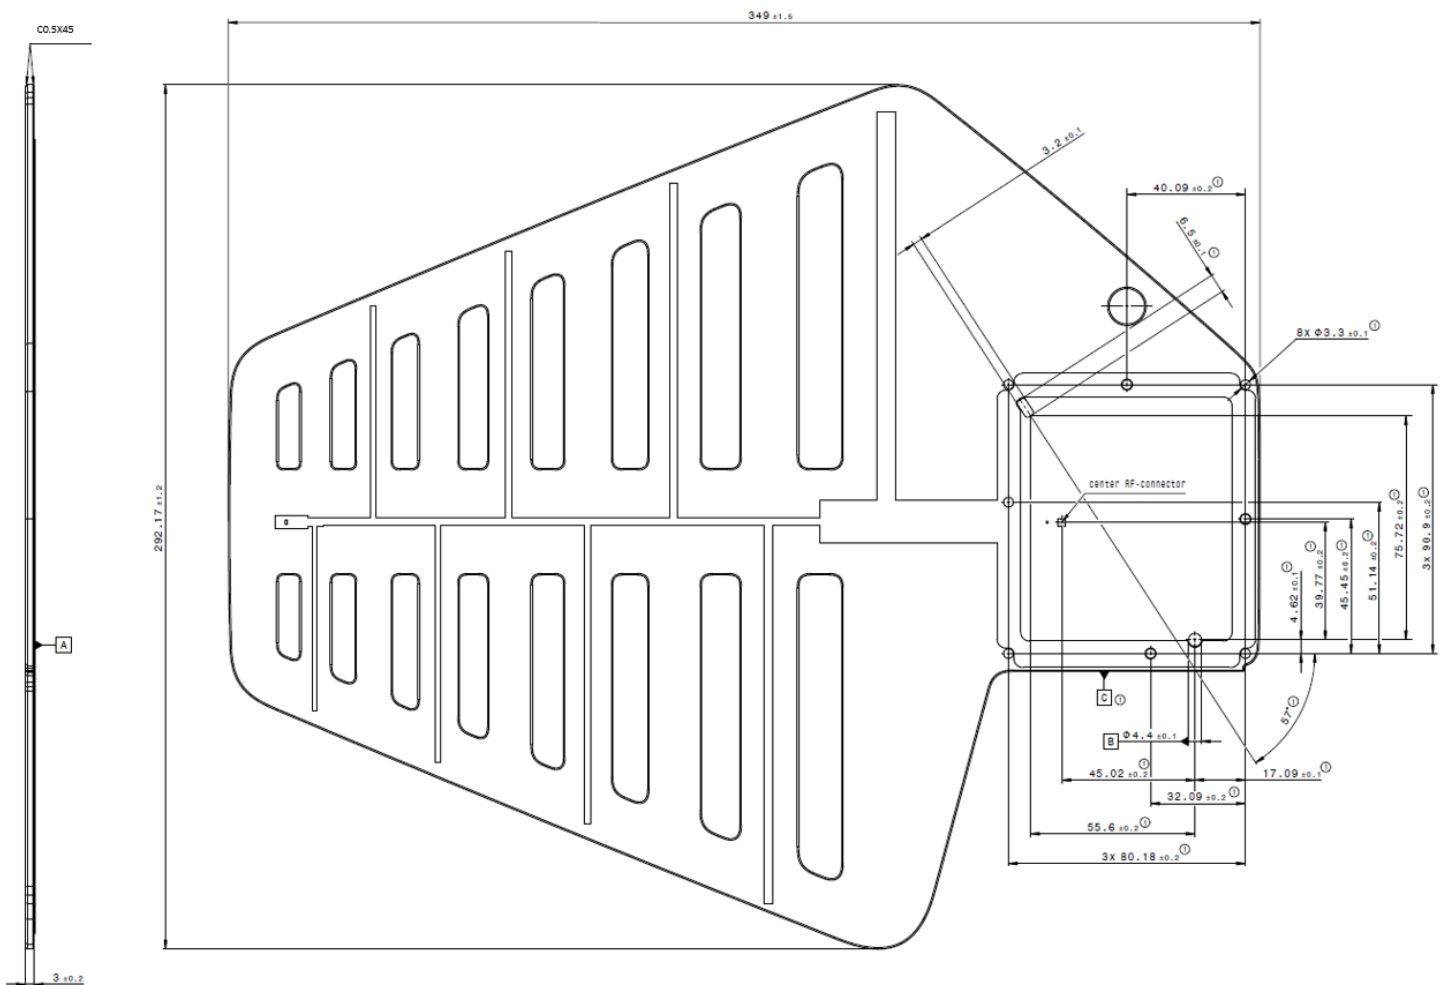

Dimensions: mm

Unless otherwise specified, all tolerances are ±0.25mm




Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04

Production line test setup

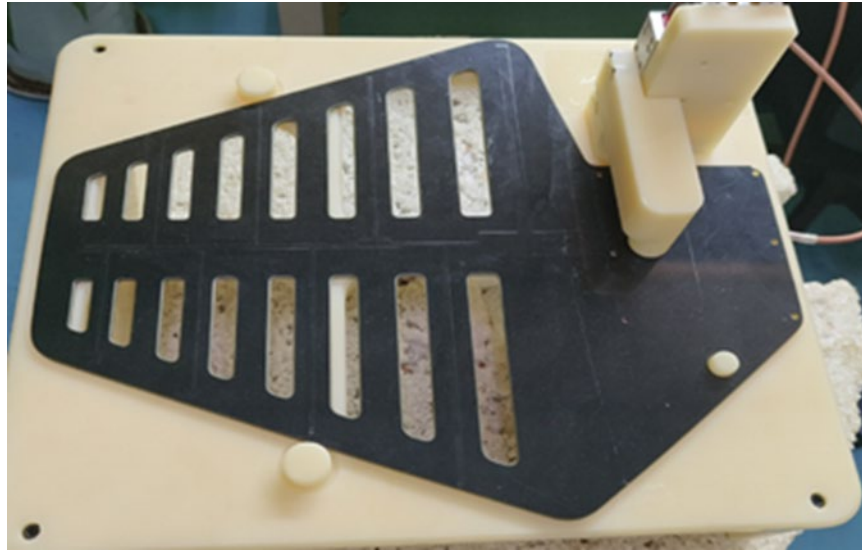

Bare pcb laminate RF-parameters can be only measure in specified RF -jig on factory. Please check Pulse production SOP document for antenna PCB measurement results without coating and final assembly.


Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04

Design Verification

Antenna radiator passive RF-performance (amplifier excluded) can be only verified with dummy amplifier box and painted antenna radiator.

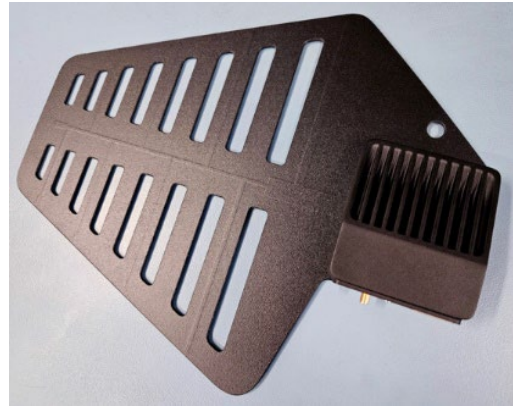

RF Results

Free space measurement:

Frequency (MHz)	470-698
Return Loss(dB)	<-14
Peak Gain (dBi)	>5
Avg. Efficiency (%)	>70
F/B ratio (dB)	>15
Max. RF input power (dBm)	+33
HPBW (deg.)	>110


Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz



W3935 SE No.: 594110 Rev: 04



Return Loss

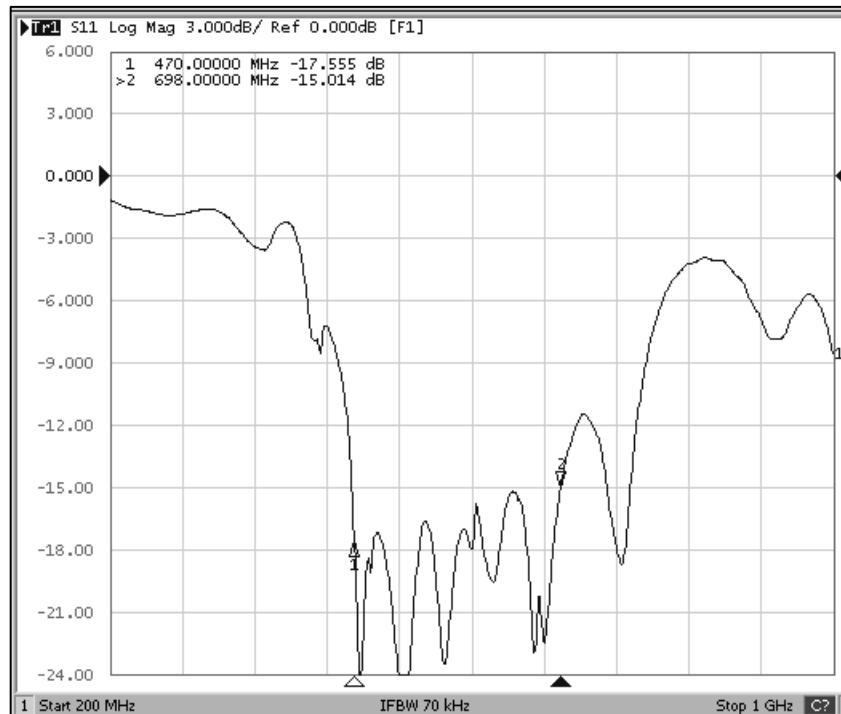

Peak Gain & Efficiency

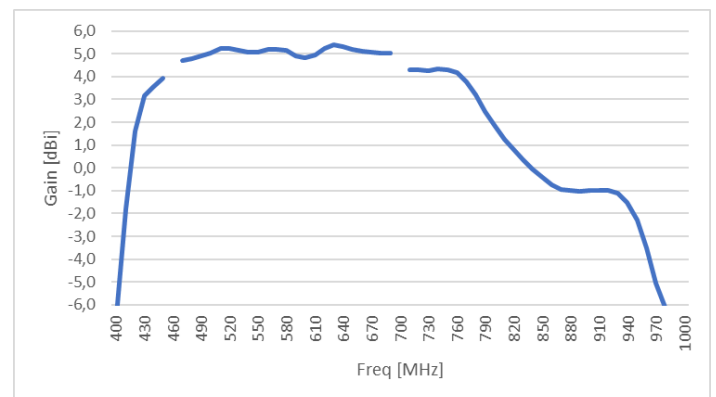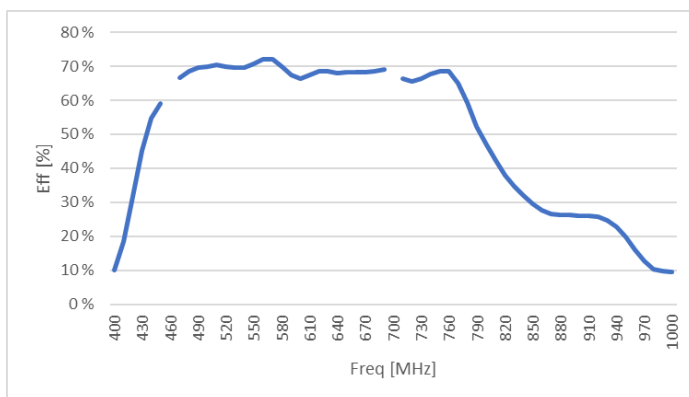

Printed Logarithmic Periodic Dipole Antenna


470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04



Radiation Pattern

- 90° 470.00 MHz ETotal
- 90° 600.00 MHz ETotal
- 90° 700.00 MHz ETotal

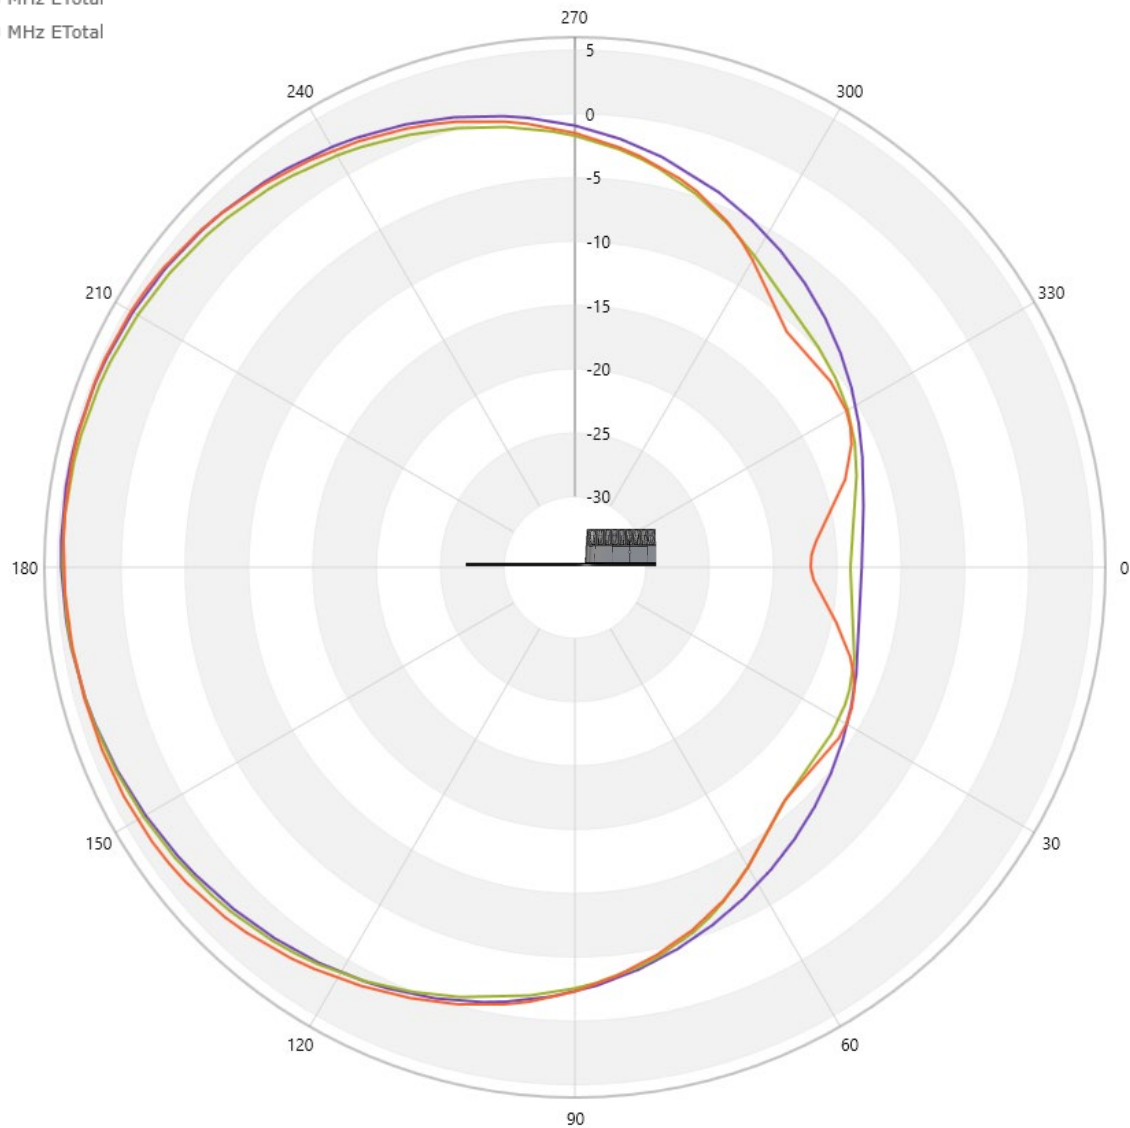

Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04



Packing

Antennas packed by aluminum foil vacuum bag and Carton box

Vacuum 8pcs PCBs into one vacuum bag, PCBs are separated by kraft paper, 1 desiccant bag per vacuum bag, honeycomb packing material as filling material.

Master carton box dimensions (MM): (375mm*285mm*200mm), 40pcs/carton box

Labeling

Aluminum Foil Vacuum Bag Label

1. P/N: W3935/594110
2. Q'TY: 8PCS
3. DATE: 2024-05-20

- 1 Pulse Part Number/Sennheiser Part Number
- 2 Packing Quantity inside Vacuum Bag
- 3 Packing Data: YYYY-MM-DD

Carton box Label



Printed Logarithmic Periodic Dipole Antenna

470 MHz – 698 MHz

W3935 SE No.: 594110 Rev: 04



1	Pulse P/No: W3935		
2	Sennheiser P/No: 594110		
3	PART NAME: PRINTED LPDA ANTENNA 470 MHz – 698 MHz		
4	WO: 2242860	11	RoHS
5	QTY: 40	6 Unit: EA	
7	Date Code: 2417	12	
8	Batch No: 0001472752		
9	Label No: 1007538583		
10	Remark: PROTO	13	REV:01
		14	6 of 8

- 1 Pulse Part Number
- 2 Sennheiser Part Number
- 3 Part Name
- 4 Work Order Number
- 5 Delivery Quantity
- 6 Unit
- 7 Date Code: YYWW
- 8 Pulse Batch Number
- 9 Pulse Label Number
- 10 Pulse Remark
- 11 RoHS Conformation
- 12 Pulse Data Matrix Code
- 13 Pulse Review Number

14 Carton Number, for example, 6 of 8, it means there are totally 8 packages from the same batch and data code, this is the 6th of those 8 cartons.

For More Information:

Americas - antennas.us@pulseelectronics.com | Europe – antennas.eu@pulseelectronics.com | Asia – antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.
Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128

'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'

