

FCC Measurement / Technical Report on

SPECTERA DAD

DAD UHF

FCC ID: DMODADUHF
IC: 2099A-DADUHF

Test Report Reference: MDE_SENNH_2401_FCC_03

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-00

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
2	Measurement Summary	4
3	Revision History	6
4	Administrative Data	7
4.1	Testing Laboratory	7
4.2	Project Data	7
4.3	Applicant Data	7
4.4	Manufacturer Data	7
5	Test Object Data	8
5.1	General Description of Radio Device	8
5.2	Tested Radio Devices	9
5.3	Tested Ancillary Equipment	9
5.4	General description of auxiliary equipment	9
5.5	Used setups	9
5.6	Operating Modes / Test Channels	9
5.7	Product labelling	10
6	Test Results	11
6.1	Output Power Conducted	11
6.2	Transmitter Frequency Stability	14
6.3	Occupied Bandwidth	16
6.4	Transmitter unwanted emissions in the spurious domain	20
6.5	Transmitter unwanted emissions in the out of band domain	32
7	Test Equipment used for tests	35
7.1	Test Equipment Hardware	35
7.2	Test Equipment Software	38
8	Antenna Factors, Cable Loss and Sample Calculations	39
8.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	39
8.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	40
8.3	Antenna R&S HL562 (30 MHz – 1 GHz)	41
8.4	Antenna R&S HF907 (1 GHz – 18 GHz)	42
8.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	43
8.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	44
9	Measurement Uncertainties	45
10	Photo Report	46

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2, 15 and 74 (10-1-23 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§15.207 Conducted limits

Part 74, Subpart H – Low Power Auxiliary Stations

§74.802 Frequency Assignment

§74.861 Technical Requirements

Note:

- ANSI C63.26-2015 is applied.
- EN 300 422-1, V2.2.1 is applied

2 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15.207

(a)

Conducted AC measurement

The measurement was performed according to ANSI C63.10, chapter 6.2

Final Result

OP-Mode

Setup

Date

FCC

IC

Measurement method, Radio Technology
conducted, WMAS 6 MHz

-

-

N/A

N/A

47 CFR CHAPTER I FCC PART 74H

§74.861 (e)(ii)(iii)

Output Power Conducted

The measurement was performed according to
ANSI C63.26, chapter 5.2.4.4

Final Result

OP-Mode

Setup

Date

FCC

IC

Measurement method, Operating Frequency,
Radio Technology

conducted, Lowest, WMAS 6 MHz

S01_AA01

2024-08-07

Passed

Passed

conducted, Mid, WMAS 6 MHz

S01_AA01

2024-08-07

Passed

Passed

conducted, Highest, WMAS 6 MHz

S01_AA01

2024-08-07

Passed

Passed

47 CFR CHAPTER I FCC PART 74H

§74.861 (e)(4)

Transmitter Frequency Stability

The measurement was performed according to ANSI C63.26, chapter 5.6

Final Result

OP-Mode

Setup

Date

FCC

IC

Measurement method, Operating Frequency,
Radio Technology

conducted, Mid, WMAS 6 MHz

S01_AA01

2024-08-07
2024-08-08
2024-09-03

Passed

Passed

47 CFR CHAPTER I FCC PART 15.236

§74.861 (e)(5)

Occupied Bandwidth

The measurement was performed according to ANSI C63.26, chapter 5.4.4

Final Result

OP-Mode

Setup

Result

Measurement method, Operating Frequency, Radio Technology

Conducted, Lowest, WMAS 6 MHz

S02_AA01

2024-08-12

Passed

Passed

Conducted, Mid, WMAS 6 MHz

S02_AA01

2024-08-12

Passed

Passed

Conducted, Highest, WMAS 6 MHz

S02_AA01

2024-08-12

Passed

Passed

47 CFR CHAPTER I FCC PART 15.236

§74.861 (e)(7)(iii)

Transmitter unwanted emissions in the spurious domain

The measurement was performed according to
ANSI C63.26, chapter 5.5.2.3.1

Final Result

OP-Mode

Setup

Date

FCC

IC

Measurement method, temperature, Operating
Frequency, Radio Technology

radiated, Normal, Lowest, WMAS 6 MHz

S01_AC01

2024-08-02
2024-08-13

Passed

Passed

radiated, Normal, Mid, WMAS 6 MHz

S01_AC01

2024-08-02
2024-08-13

Passed

Passed

radiated, Normal, Highest, WMAS 6 MHz

S01_AC01

2024-08-02
2024-08-13

Passed

Passed

47 CFR CHAPTER I FCC PART 15.236

§74.861 (e)(7)(iv)

Transmitter unwanted emissions in the OOB domain

The measurement was performed according to EN 300 422-1, clause 5.4.4

Final Result
OP-Mode
Setup
Date
FCC
IC

 Measurement method, temperature, Operating
 Frequency, Radio Technology

conducted, Normal, Lowest, WMAS 6 MHz

S02_AA01

2024-08-07

Passed

Passed

conducted, Normal, Mid, WMAS 6 MHz

S02_AA01

2024-08-07

Passed

Passed

conducted, Normal, Highest, WMAS 6 MHz

S02_AA01

2024-08-07

Passed

Passed

3 REVISION HISTORY

Report version control			
Version	Release date	Change Description	Version validity
initial	2024-09-17	--	valid
--	--	--	--

COMMENT: -



(responsible for accreditation scope)
Dipl.-Ing. Robert Machulec



(responsible for testing and report)
Dipl.-Ing. Marco Kullik



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

4 ADMINISTRATIVE DATA

4.1 TESTING LABORATORY

Company Name: 7layers GmbH

Address: Borsigstr. 11
40880 Ratingen
Germany

Laboratory accreditation no: DAKkS D-PL-12140-01-00

FCC Designation Number: DE0015

FCC Test Firm Registration: 29146

ISED CAB Identifier E0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Robert Machulec

Report Template Version: 2024-07-10

4.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Marco Kullik

Date of Report: 2024-09-17

Testing Period: 2024-08-02 to 2024-09-03

4.3 APPLICANT DATA

Company Name: Sennheiser electronic SE & Co. KG

Address: Am Labor 1
D-30900 Wedemark

Germany

Contact Person: Mr. Ouajdi Ochi

4.4 MANUFACTURER DATA

Company Name: please see Applicant Data

Address:

Contact Person:

5 TEST OBJECT DATA

5.1 GENERAL DESCRIPTION OF RADIO DEVICE

Kind of Device product description	Digital Antenna Directional. Transceiver part of SPECTERA WMAS system.
Product name	SPECTERA DAD
Modell	SPECTERA DAD UHF
Declared EUT data by the supplier	
Power Supply Type	DC (PoE)
Normal Voltage	48.0 V
Normal Temperature	20°C
Low Temperature	-10.0 °C (according to RSS-GEN tested at -30°C)
High Temperature	+60.0 °C (according to RSS-GEN tested at +50°C)
Antenna type / gain	Integral, 4.5 dBi (2.36 dBd)
Tuning Range	473 – 605 MHz
Declared Channel Bandwidth	6.0 MHz
Declared Maximum Transmission Output Power [E.I.R.P] / [E.R.P]	473 – 605 MHz: 100 mW / 20.0 dBm [E.I.R.P]
Channel Separation [MHz]	Typically 12.0 MHz, minimum 6.0 MHz
Transmission Type	Continuous
Operating Modes, used Modulations and Data Rates for testing	Live Ultra Low Latency, OFDM
Frequency of Channels	Lowest: 473.0 MHz Mid: 539.0 MHz Highest: 605.0 MHz
Min. Number of Audio Channels	1
Max. Number of Audio Channels	64
EUT provides unmodulated Test Mode	Yes
Interfaces	Enclosure Antenna-Lan port (appr. 10 shielded Cat5e cable connected)

5.2 TESTED RADIO DEVICES

Sample Name	Sample Code	Description
EUT aa01	DE1511002aa01	Conducted Sample
Sample Parameter	Value	
HW Version	FMO2	
SW Version	v0.20.1+16-gbd649427	
Serial No.	1493000050	
Comment	-	

Sample Name	Sample Code	Description
EUT ac01	DE1511002ac01	Radiated Sample
Sample Parameter	Value	
HW Version	FMO2	
SW Version	v0.20.1+16-gbd649427	
Serial No.	1493000066	
Comment	-	

5.3 TESTED ANCILLARY EQUIPMENT

Device	Details (Manufacturer, Type Model, OUT Code)	Reason for using
-	-	-

5.4 GENERAL DESCRIPTION OF AUXILIARY EQUIPMENT

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX01	Sennheiser, 19- Inch Rack, Art. No.: 509162, 594190 Rev. 04, Nightly.20240103.1, 1393000079	SPECTERA Base Station
AUX02	Sennheiser, EMO2 Low, L072, v0.17.0+46-gc2ac5d35, -	SPECTERA SEK
AUX03	Sennheiser, Passive PoE injector, -, -, -	PoE injector

5.5 USED SETUPS

Setup	Combination of EUTs, auxiliary and ancillary equipment	Description
S01_AA01	EUT aa01, AUX01,	Conducted Setup, TX-Testmode, TX-CW Testmode
S02_AA01	EUT aa01, AUX01, AUX02	Conducted Setup, TX 1 kHz tone
S01_AC01	EUT ac01, AUX01, AUX02	Radiated Setup, TX-Testmode

5.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WMAS
Test Channels:
Frequency [MHz]

Band: 470 – 608 MHz		
low	mid	high
473	539	605

5.7 PRODUCT LABELLING

5.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

5.7.2 LOCATION OF THE LABEL ON THE EUT


Please refer to the documentation of the applicant.

6 TEST RESULTS

6.1 OUTPUT POWER CONDUCTED

§74.861 (e)(ii)(iii)

Test case performed according: ANSI C63.26, chapter 5.2.4.4

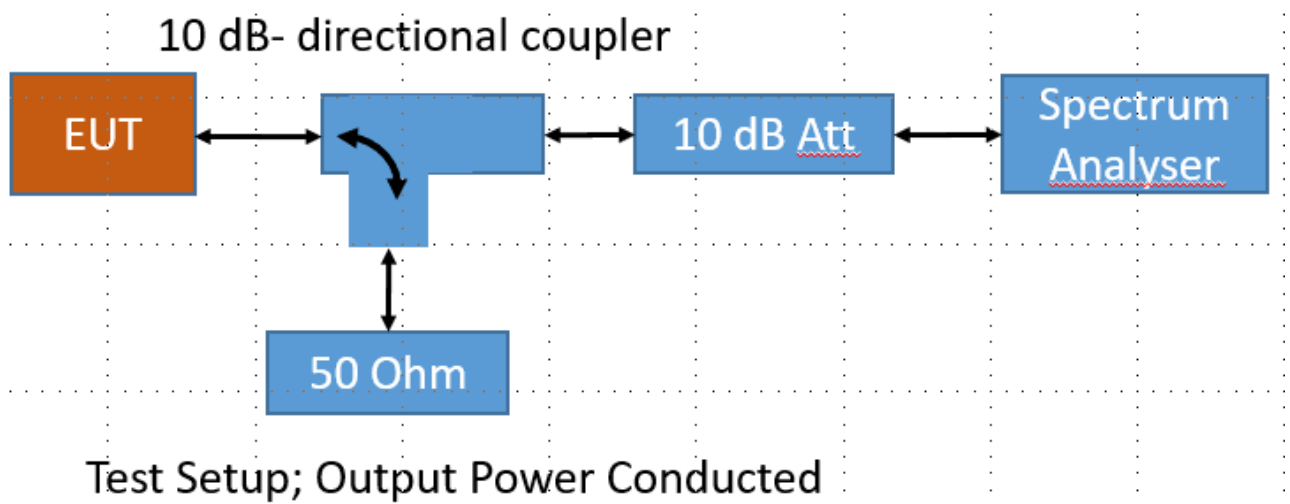

6.1.1 LIMITS: § 74.861 (E)(1), (II), (III)

Frequency Bands	Output Power (conducted)
470 – 608 MHz	$\leq 250 \text{ mW (24 dBm)}$

6.1.2 TEST CASE DETAILS:

Ambient temperature: 22 °C
Air Pressure: 1010 hPa
Humidity: 41 %


Band 1, 470 MHz - 608 MHz						
Measurement Method	Frequency	Voltage	Nominal Operating Frequency [MHz]	Output Power Conducted [dBm]	Limit Conducted [dBm]	Margin to Limit [dB]
Conducted	Low	Normal	473.000	13.2	24.0	10.8
Conducted	Mid	Normal	539.000	13.4	24.0	10.6
Conducted	High	Normal	605.000	13.4	24.0	10.6

Comments:


- The measurement was performed conducted.
- The Output Power value does not contain the antenna gain.
- TX Test Mode of the EUT used.

6.1.3 MEASUREMENT PLOTS:


Measurement method = conducted, Operating Frequency = Low, Radio Technology = WMAS (S01_AA01)

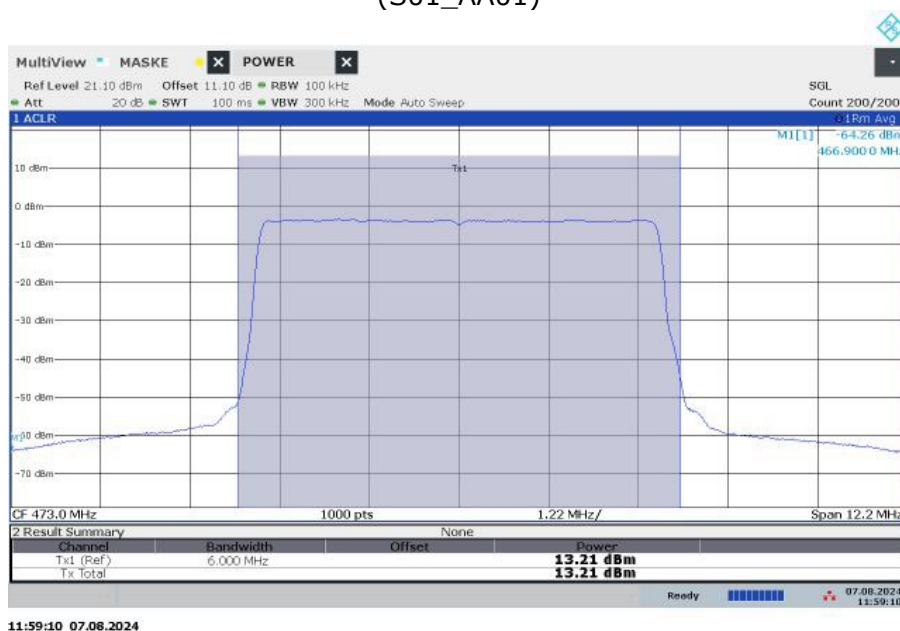

Measurement method = conducted, Operating Frequency = Mid, Radio Technology = WMAS (S01_AA01)

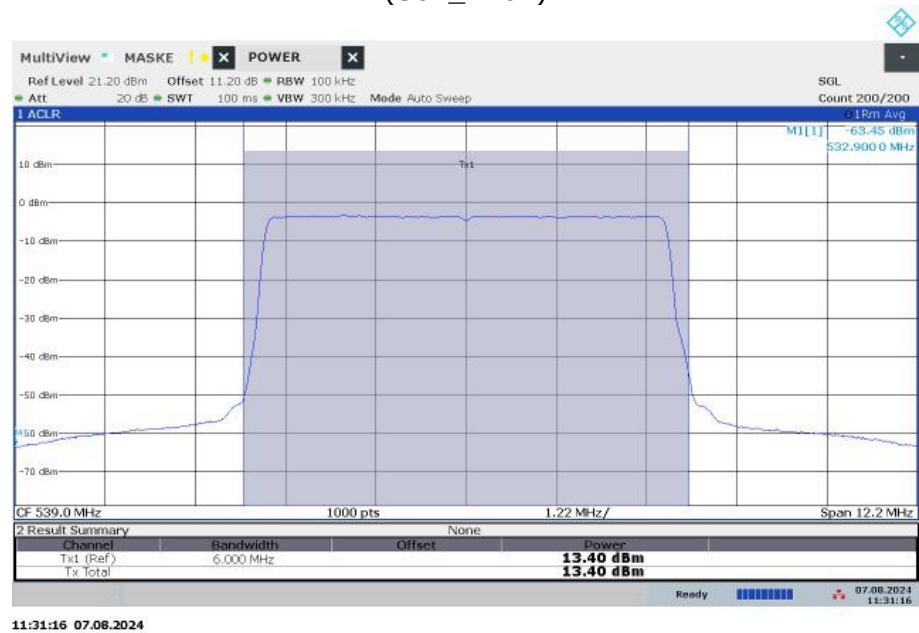

Measurement method = conducted, Operating Frequency = High, Radio Technology = WMAS (S01_AA01)

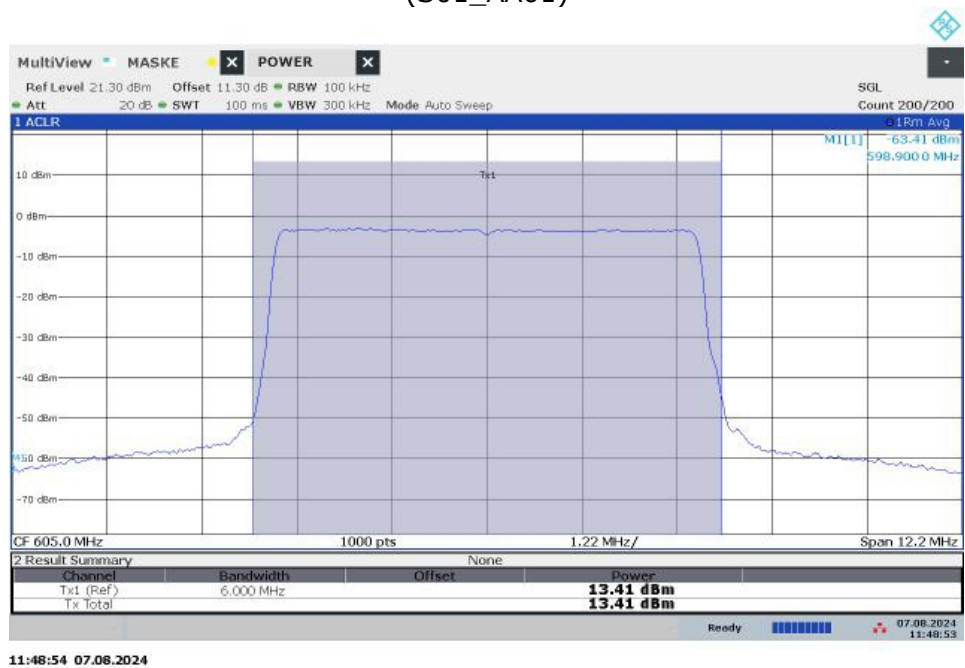

TEST EQUIPMENT USED:
- Radio Lab

6.2 TRANSMITTER FREQUENCY STABILITY

§74.861 (e)(4)


Test case performed according: ANSI C63.26, Chapter 5.6

Definition:

The Declared Centre Frequency (f_c) is the centre of the Operating Channel. Transmitter Frequency Stability is a measurement of the transmitter frequency error determined by the positive or negative difference between the declared centre frequency and the actual centre frequency of the device.

Test Setup:

The test was performed with the following setup:

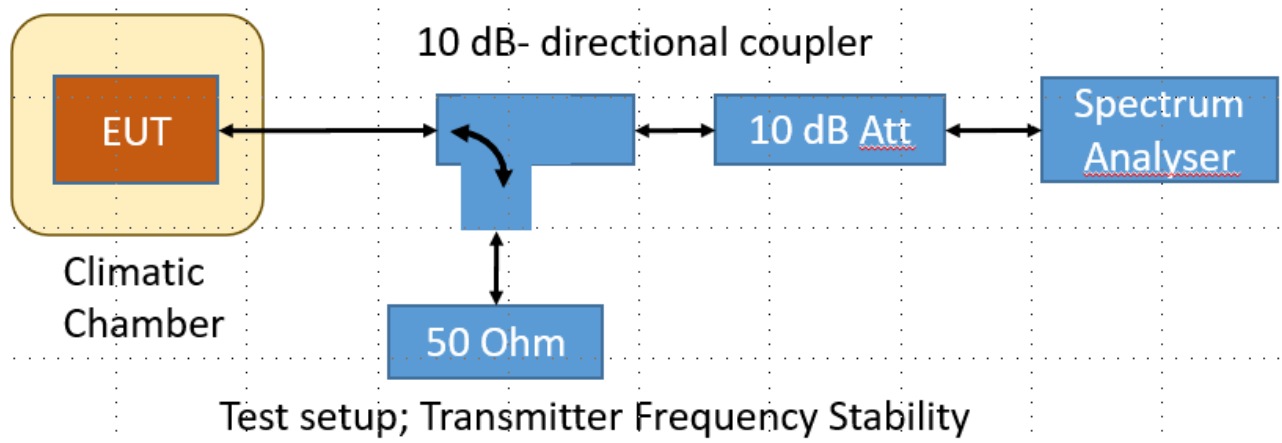

6.2.1 LIMITS: LIMITS: §74.861 E(4)

The frequency tolerance of the transmitter shall be 0.005 percent.

6.2.2 TEST CASE DETAILS:

Ambient temperature: 20 °C
Air Pressure: 1007 hPa
Humidity: 52 %


Band; 470 MHz - 608 MHz							
Frequency	Temperature [°C]	Voltage	Nominal Operating Frequency [MHz]	Measured Operating Frequency [MHz]	Delta f [kHz]	Limit +/- [kHz]	Margin to Limit [kHz]
Mid	20	Normal	539.000	538.9999859	-0.01	26.95	26.94
Mid	20	Low	539.000	538.9999941	-0.01	26.95	26.94
Mid	20	High	539.000	538.9999851	-0.01	26.95	26.94
Mid	-30	Normal	539.000	539.0000016	0.00	26.95	26.95
Mid	-20	Normal	539.000	538.9999973	0.00	26.95	26.95
Mid	-10	Normal	539.000	539.0000383	0.04	26.95	26.91
Mid	0	Normal	539.000	538.9999915	-0.01	26.95	26.94
Mid	10	Normal	539.000	539.0000776	0.08	26.95	26.87
Mid	30	Normal	539.000	539.0000058	0.01	26.95	26.94
Mid	40	Normal	539.000	538.9999613	-0.04	26.95	26.91
Mid	50	Normal	539.000	538.9999906	-0.01	26.95	26.94

Comments:

- The measurement was performed conducted.
- TX-CW Test Mode of the EUT used.
- Low voltage = 40.8 V
- High voltage = 55.2 V

6.2.3 MEASUREMENT PLOTS (WORST-CASE)

Measurement method = conducted, Temperature = 10°C, Voltage = Normal,
 Operating Frequency = Mid, Radio Technology = WMAS
 (S01_AA01)

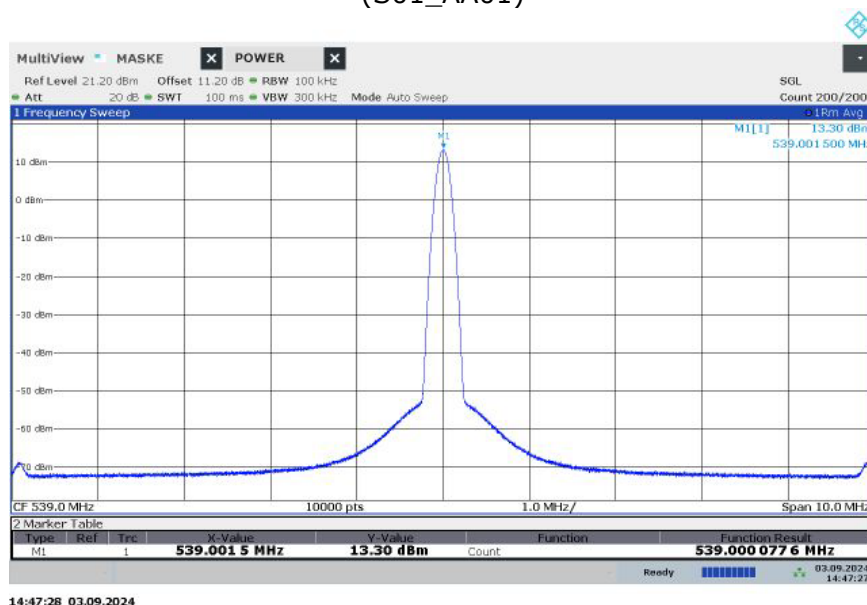

TEST EQUIPMENT USED:
 Radio Lab

6.3 OCCUPIED BANDWIDTH

§74.861 (e)(5)

Test case performed according: ANSI C63.26, Clause 5.4.4

Definition:

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.


Analyzer settings:

- Resolution Bandwidth (RBW): approx. $\geq 1\%$ of the span, but not below
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 30 Mhz
- Trace: Maxhold
- Sweeps: allow the trace to stabilize
- Sweeptime: 20 ms
- Detector: Peak

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

Test Setup:

The test was performed with the following setup:

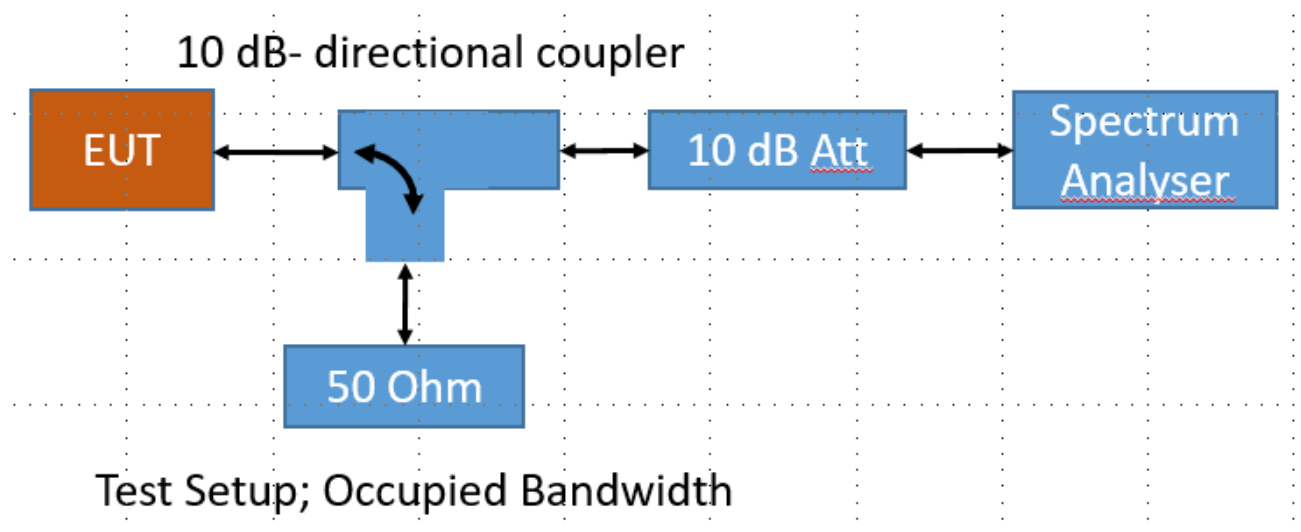

6.3.1 LIMITS: §15.236 (D),(2) RSS-210, ANNEX G, G.3

Occupied Bandwidth

§74.861 (e)(4)
$\leq 6 \text{ MHz}$

Audio channels

§15.236 (e),(4)
$\geq 3 / \text{MHz}$

6.3.2 TEST CASE DETAILS:

Ambient temperature: 22 °C
Air Pressure: 1010 hPa
Humidity: 41 %


Band: 470 MHz - 608 MHz						
Frequency	Nominal Operating Frequency [MHz]	Lower 99% Frequency [MHz]	Upper 99% Frequency [MHz]	OCW [kHz]	Limit OCB [kHz]	Margin to Limit [kHz]
Low	473.000	470.2497	475.7296	5479.9000	6000.0000	520.1000
Mid	539.000	536.3036	541.6773	5373.7000	6000.0000	626.3000
High	605.000	602.2446	607.7371	5492.5000	6000.0000	507.5000

Comments:


- The measurement was performed conducted.

6.3.3 MEASUREMENT PLOTS:


Operating Frequency = Mid, Channel = Low, Radio Technology = WMAS
(S02_AA01)

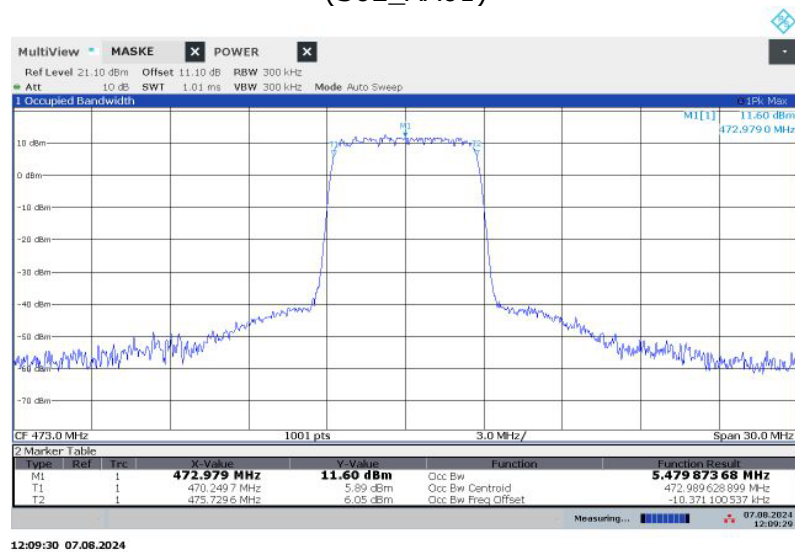

Operating Frequency = Mid, Channel = Mid, Radio Technology = WMAS
(S02_AA01)

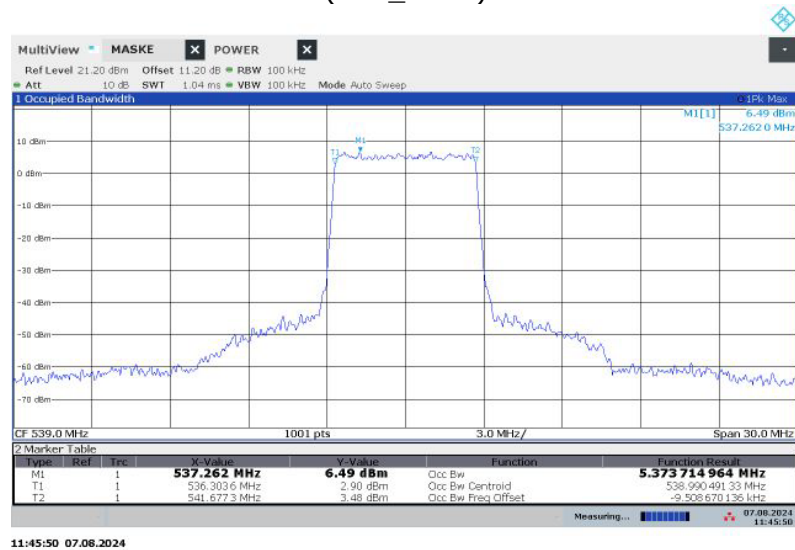

Operating Frequency = Mid, Channel = High, Radio Technology = WMAS
(S02_AA01)

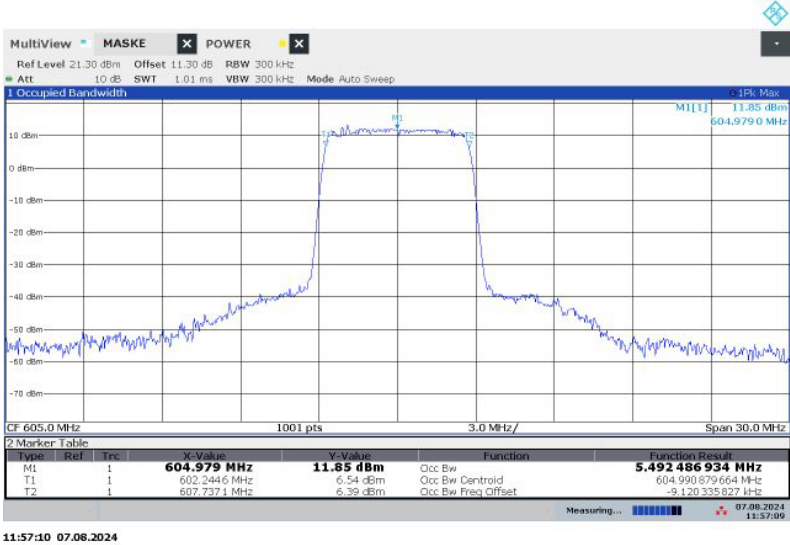

TEST EQUIPMENT USED:
- Radio Lab

6.4 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

§74.861 (e)(7)(iii)

The test was performed according to:

ANSI C63.26, chapter 5.5.2.3.1

6.4.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according to the following sub-chapters of ANSI C63.26:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

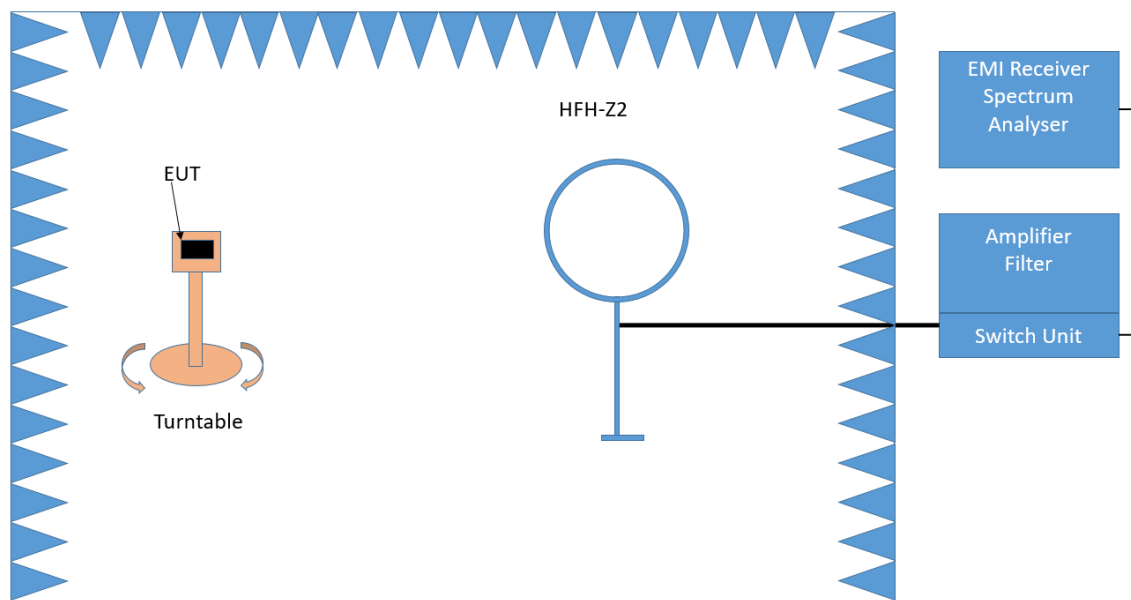

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz - 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

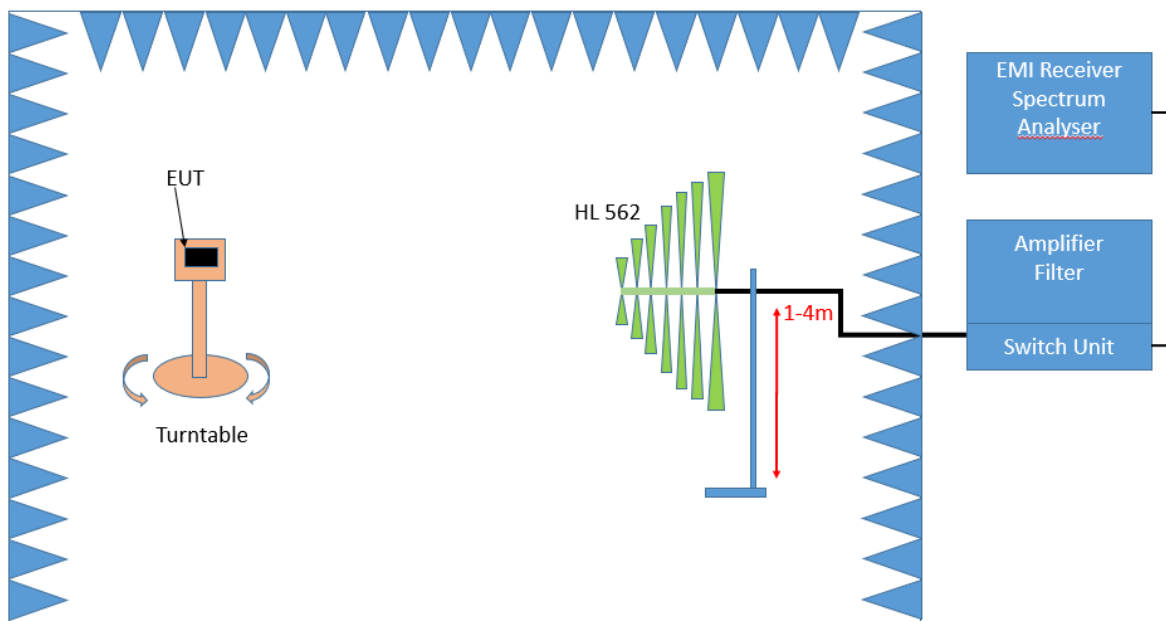

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak
- Frequency range: 30 – 1000 MHz
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: 10 s
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360° . During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary between 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: 100 ms
- Turntable angle range: 360°
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with RMS detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:


- Detector: RMS
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber. All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement above 1 GHz

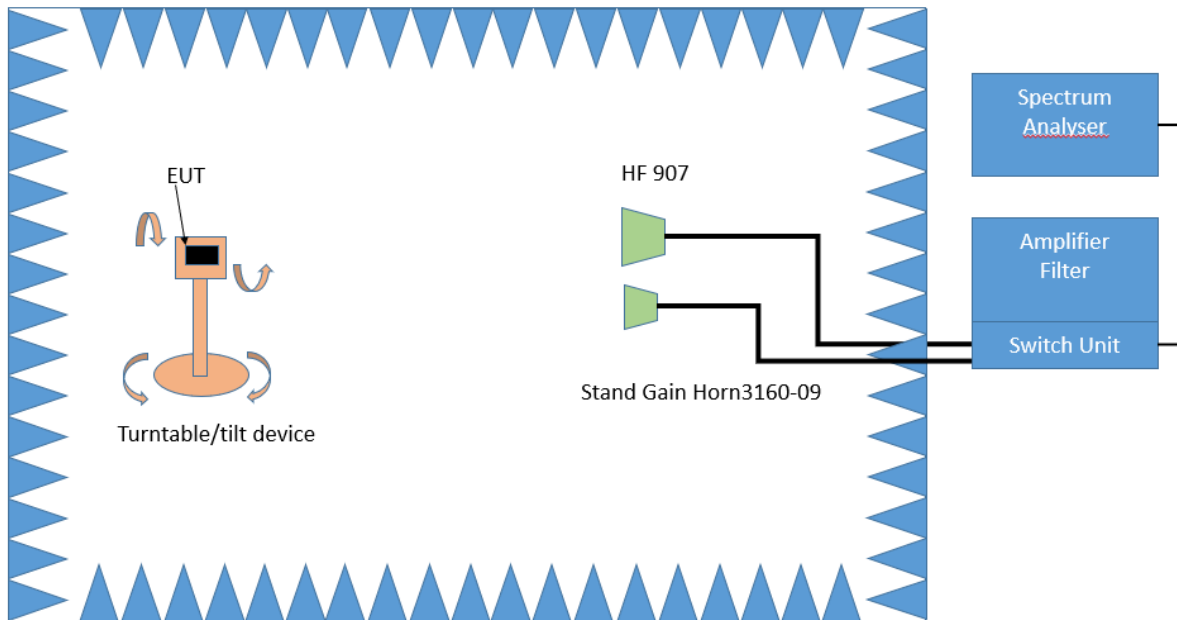

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: RMS
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: RMS / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

6.4.2 LIMITS: EN 300 422-1, CLAUSE 4.2.4.1.2

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
9 kHz – 150 kHz	-36 dBm	1 kHz
150 kHz – 30 MHz	-36 dBm	10 kHz
30 MHz to 1 GHz	-36 dBm	$F_c + 2,5 B \leq f \leq f_c + 4 B$: 1 kHz $F_c + 4 B < f \leq f_c + 10 B$: 10 kHz $f > f_c + 10 B$: 100 kHz $f < f_c - 10 B$: 100 kHz $f_c - 10 B \leq f < f_c - 4 B$: 10 kHz $f_c - 4 B \leq f \leq f_c - 2,5 B$: 1 kHz
Except:		
47 MHz to 74 MHz 87.5 MHz to 118 MHz	-54 dBm	100 kHz
174 MHz to 230 MHz 470 MHz to 862 MHz	-54 dBm	$F_c + 2,5 B \leq f \leq f_c + 4 B$: 1 kHz $F_c + 4 B < f \leq f_c + 10 B$: 10 kHz $f > f_c + 10 B$: 100 kHz $f < f_c - 10 B$: 100 kHz $f_c - 10 B \leq f < f_c - 4 B$: 10 kHz $f_c - 4 B \leq f \leq f_c - 2,5 B$: 1 kHz
$1 \text{ GHz} < f \leq F_{\text{upper}}$	-30 dBm	$F_c + 2,5 B \leq f \leq f_c + 10 B$: 30 kHz $F_c + 10 B < f \leq f_c + 12 B$: 300 kHz $f > f_c + 12 B$: 1 MHz $f < f_c - 12 B$: 1 MHz $f_c - 12 B \leq f < f_c - 10 B$: 300 kHz $f_c - 10 B \leq f \leq f_c - 2,5 B$: 30 kHz

6.4.3 TEST CASE DETAILS:

Ambient temperature: 23°C
Air Pressure: 1012 hPa
Humidity: 43%

Band: 470 MHz - 608 MHz					
Operating Mode: TX-On, Low channel					
Measurement Method	Frequency [MHz]	Spurious Level RMS [dBm]	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
Radiated	53.4396	-70.0	100	-54.0	16.0
Radiated	56.1589	-67.4	100	-54.0	13.4
Radiated	63.3210	-72.5	100	-54.0	18.5
Radiated	945.1608	-48.6	100	-36.0	12.6
Radiated	1758.400	-69.7	1000	-30.0	39.7

Band: 470 MHz - 608 MHz					
Operating Mode: TX-On, Mid channel					
Measurement Method	Frequency [MHz]	Spurious Level RMS [dBm]	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
Radiated	53.4378	-70.3	100	-54.0	15.7
Radiated	56.2665	-67.4	100	-54.0	13.4
Radiated	63.4505	-72.0	100	-54.0	18.0
Radiated	1076.800	-43.8	1000	-30.0	13.8
Radiated	1617.000	-47.4	1000	-30.0	17.4


Band: 470 MHz - 608 MHz					
Operating Mode: TX-On, High channel					
Measurement Method	Frequency [MHz]	Spurious Level RMS [dBm]	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
Radiated	53.2780	-70.1	100	-54.0	6.1
Radiated	56.3680	-67.6	100	-54.0	13.6
Radiated	63.7840	-72.6	100	-54.0	18.6
Radiated	1814.2.000	-47.3	1000	-30.0	17.3

Comments:

- Tested frequency range: 30 MHz – 7 GHz.
- The measurement was performed with maximum output power. TX - Test mode used.
- AUX01 was outside anechoic chamber.


6.4.4 MEASUREMENT PLOTS:

Measurement method = radiated, Temperature = Normal, Operating Frequency = Low,
Radio Technology = WMAS
(S01_AC01)

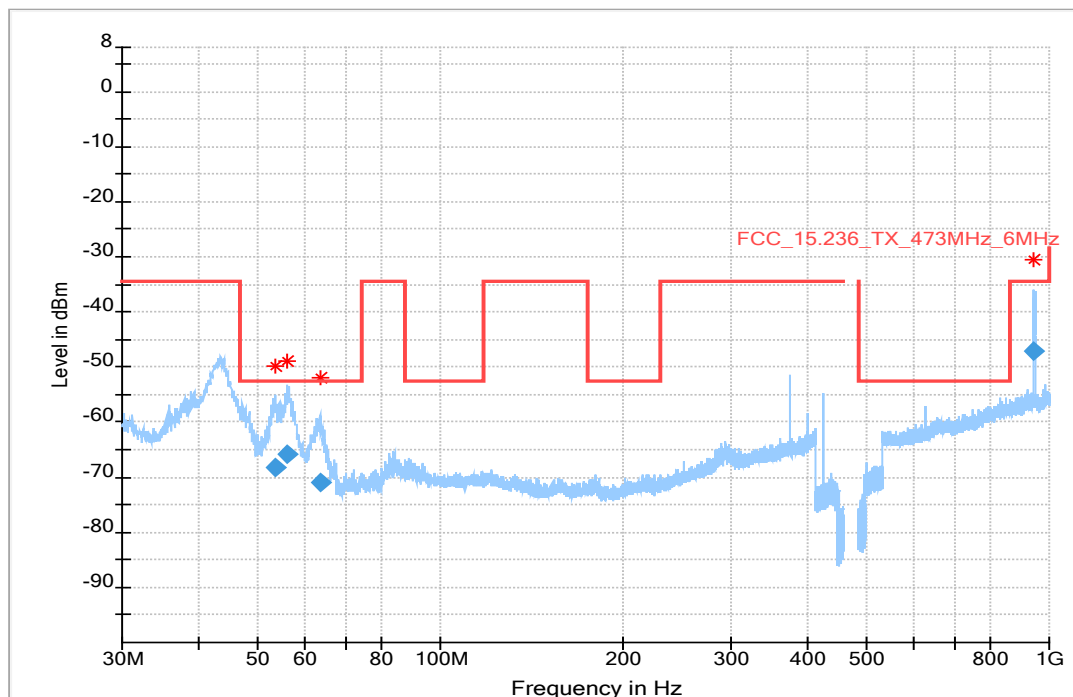

Final Result


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
53.439600	-69.95	-54.00	15.95	1000.0	100.000	131.0	V	-97.0	-92.0
56.158900	-67.39	-54.00	13.39	1000.0	100.000	184.0	V	-90.0	-92.1
63.321000	-72.52	-54.00	18.52	1000.0	100.000	131.0	V	-123.0	-90.3
945.160857	-48.57	-36.00	12.57	1000.0	100.000	138.0	H	16.0	-68.9

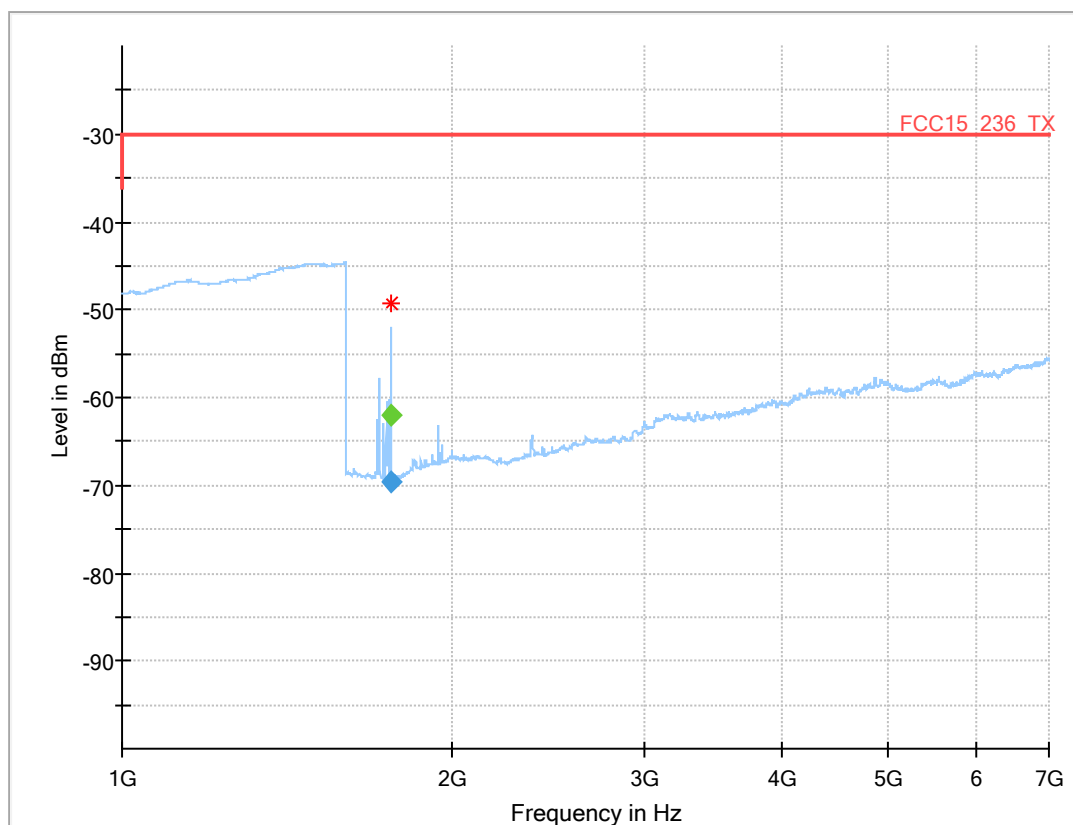

Final Result


Frequency (MHz)	CAverage (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1758.400	---	-61.9	-30.00	31.92	1000.0	1000.000	150.0	V	52.0	-11.0	-100.8
1758.400	-69.7	--	-30.00	39.69	1000.0	1000.000	150.0	V	52.0	-11.0	-100.8

Measurement method = radiated, Temperature = Normal, Operating Frequency = Mid,
Radio Technology = WMAS
(S01_AC01)

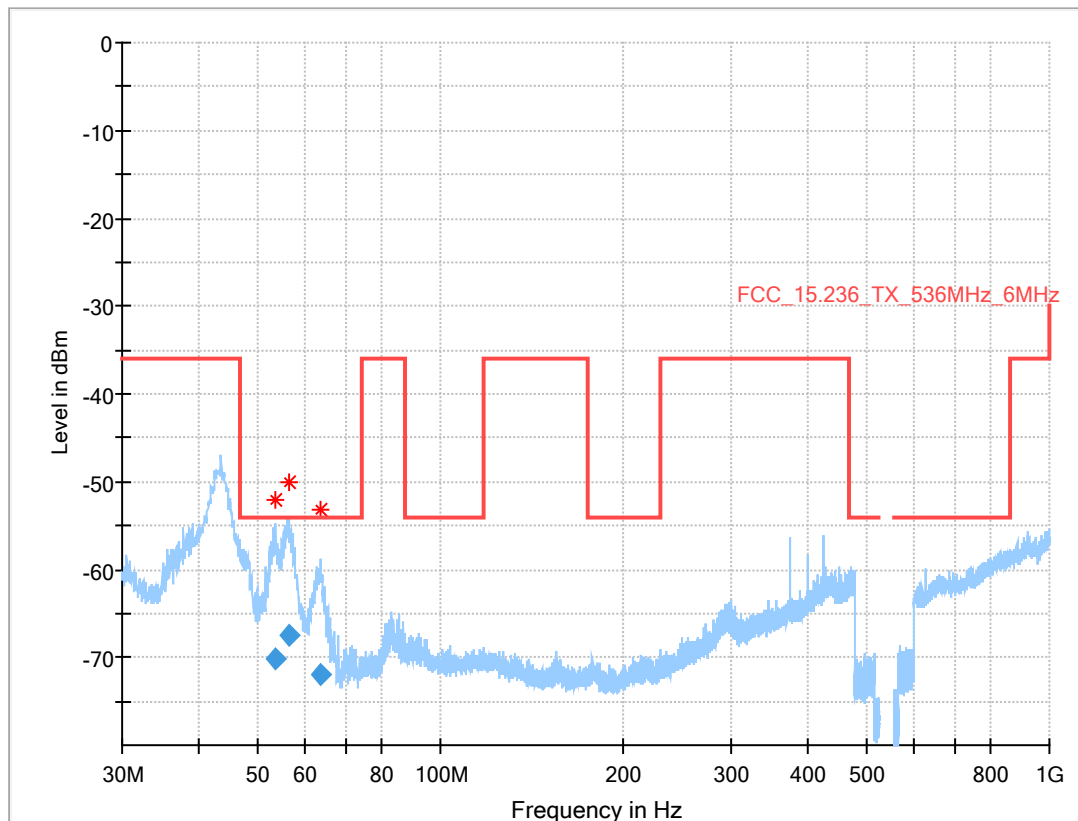

Final_Result


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
53.437800	-70.27	-54.00	16.27	1000.0	100.000	145.0	V	-72.0	-92.0
56.266500	-67.40	-54.00	13.40	1000.0	100.000	162.0	V	-78.0	-92.1
63.450500	-72.04	-54.00	18.04	1000.0	100.000	171.0	V	-197.0	-90.3

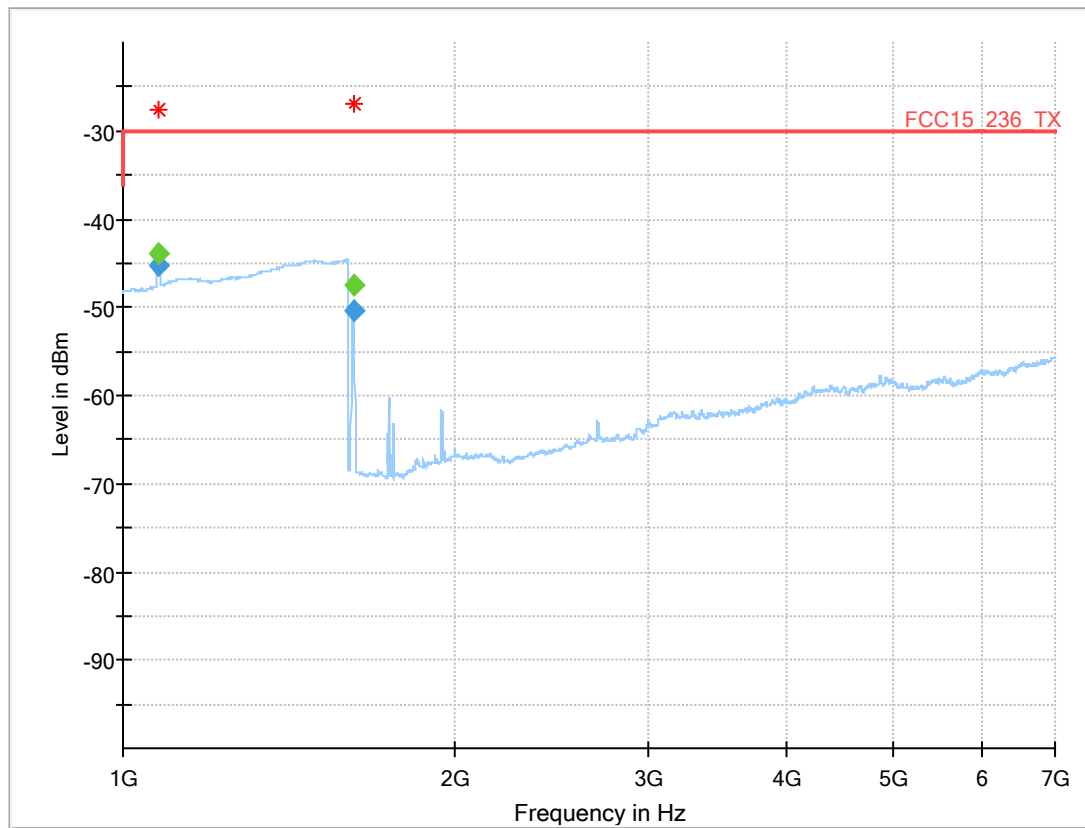

Final_Result


Frequency (MHz)	CAverage (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation	Corr. (dB)
1076.800	-45.3	---	-30.00	15.27	1000.0	1000.000	150.0	H	-174.0	-3.0	-69.6
1076.800	---	-43.8	-30.00	13.83	1000.0	1000.000	150.0	H	-174.0	-3.0	-69.6
1617.100	-50.4	---	-30.00	20.39	1000.0	1000.000	150.0	H	-173.0	0.0	-
1617.100	---	-47.4	-30.00	17.38	1000.0	1000.000	150.0	H	-173.0	0.0	-

Measurement method = radiated, Temperature = Normal, Operating Frequency = high,
Radio Technology = WMAS
(S01_AC01)

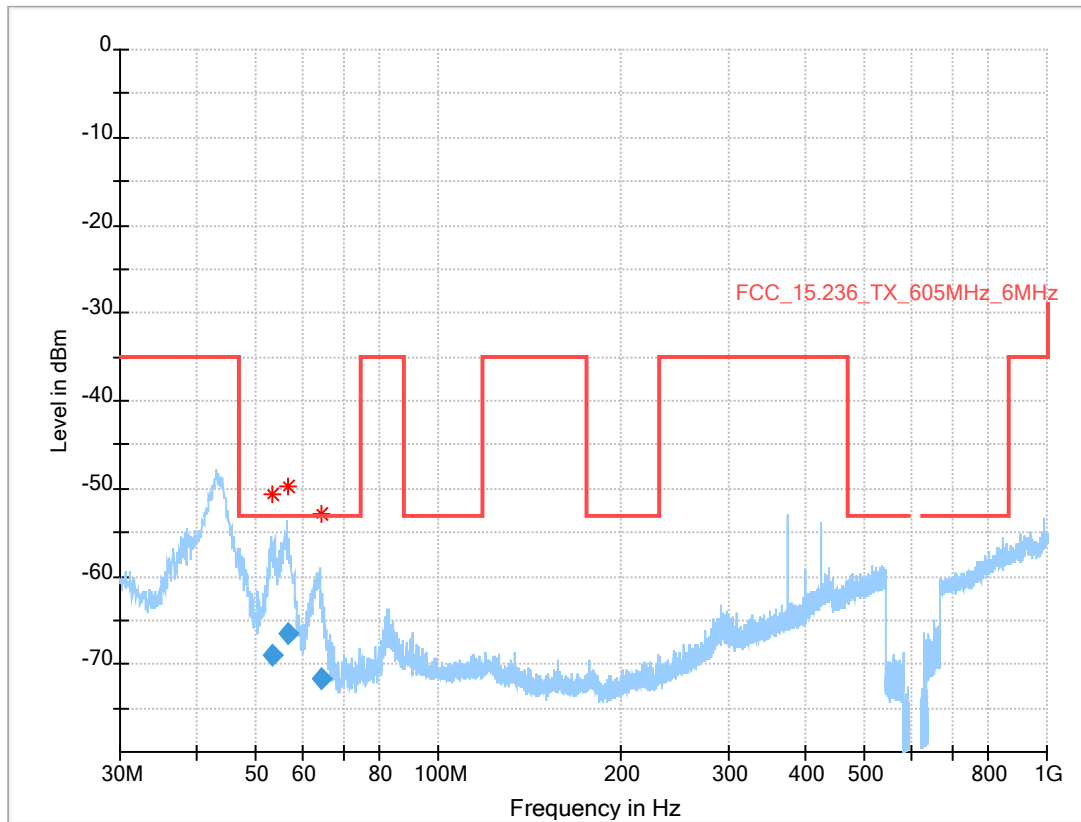

Final_Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
53.278000	-70.05	-54.00	16.05	1000.0	100.000	100.0	V	-96.0	-91.9
56.368000	-67.55	-54.00	13.55	1000.0	100.000	223.0	V	-78.0	-92.1
63.784000	-72.56	-54.00	18.56	1000.0	100.000	190.0	V	-158.0	-90.2

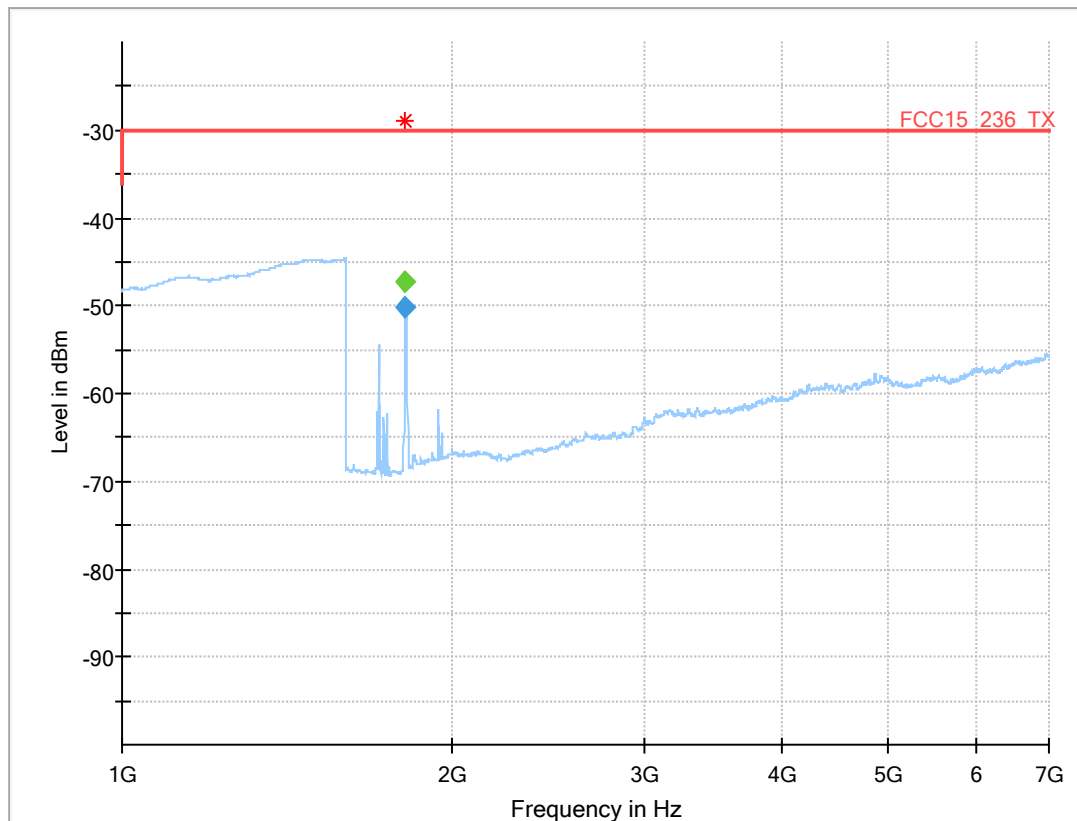

Final Result

Frequency (MHz)	CAverage (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1814.200	-50.1	---	-30.00	20.14	1000.0	1000.000	150.0	H	-172.0	4.0	-100.6
1814.200	---	-47.3	-30.00	17.27	1000.0	1000.000	150.0	H	-172.0	4.0	-100.6

TEST EQUIPMENT USED:

- Radiated Emissions SAC < 1 Ghz
- Radiated Emissions FAR 2.4 GHz FCC

6.5 TRANSMITTER UNWANTED EMISSIONS IN THE OUT OF BAND DOMAIN


Test case performed according: EN 300 422-1, clause 5.4.3

Definition:

Transmitter unwanted emissions in the out of band domain are emissions on a frequency or frequencies immediately outside the operating channel, which results from the modulation process, but excluding spurious emissions.

Test Setup:

The test was performed with the following setup:

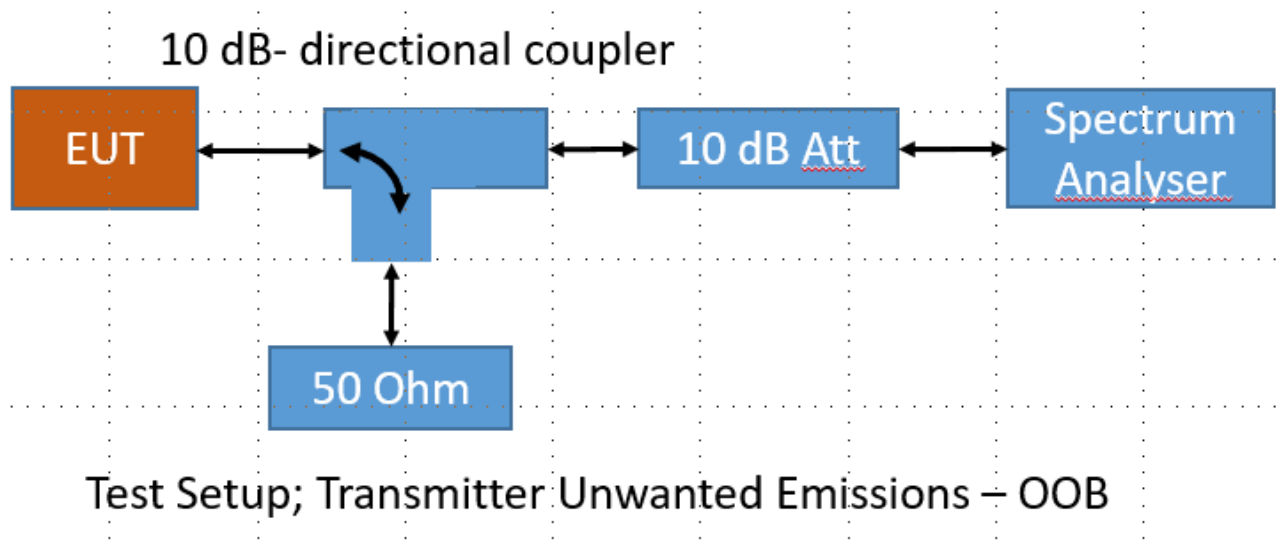

6.5.1 LIMITS: EN 300 422-1, CLAUSE 4.2.4.2.2

The limits in figure 3 are applicable for WMAS, where B is the Declared Channel Bandwidth.

The mean Power Density, measured with 100 kHz measurement bandwidth and PEAK detector, of the transmitter unwanted emissions shall not exceed the limits of the mask provided in figure 3.

The limits in figure 3 are relative to transmitter RF output power according to clauses 4.2.1 and 5.4.1.

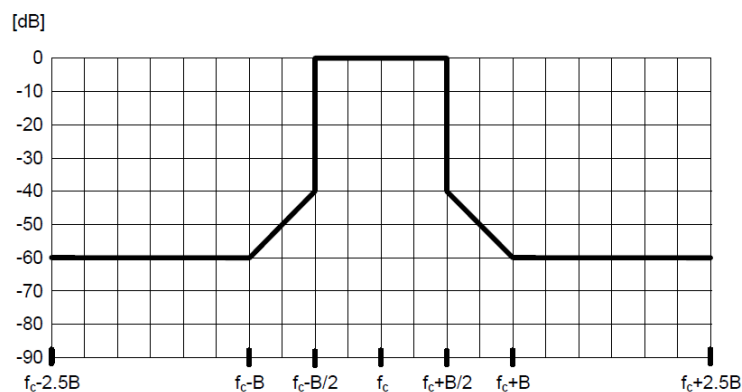


Figure 3: Transmit spectral power mask for WMAS, RBW = 100 kHz

6.5.2 TEST CASE DETAILS:

Ambient temperature: 22°C
Air Pressure: 1010 hPa
Humidity: 42%


Ban:, 470 MHz - 608 MHz		
Frequency	Nominal Operating Frequency [MHz]	Within Spectrum Mask
Low	473.000	YES
Mid	539.000	YES
High	605.000	YES

Comments:


- The measurement was performed conducted.

6.5.3 MEASUREMENT PLOTS:


Measurement method = conducted, Temperature = Normal, Operating Frequency = Low,
 Radio Technology = WMAS
 (S02_AA01)

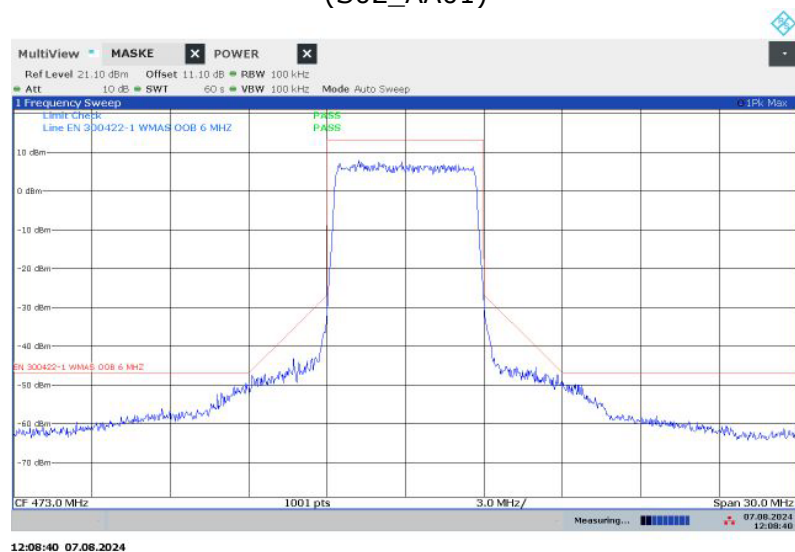

Measurement method = conducted, Temperature = Normal, Operating Frequency = Mid,
Radio Technology = WMAS
(S02_AA01)

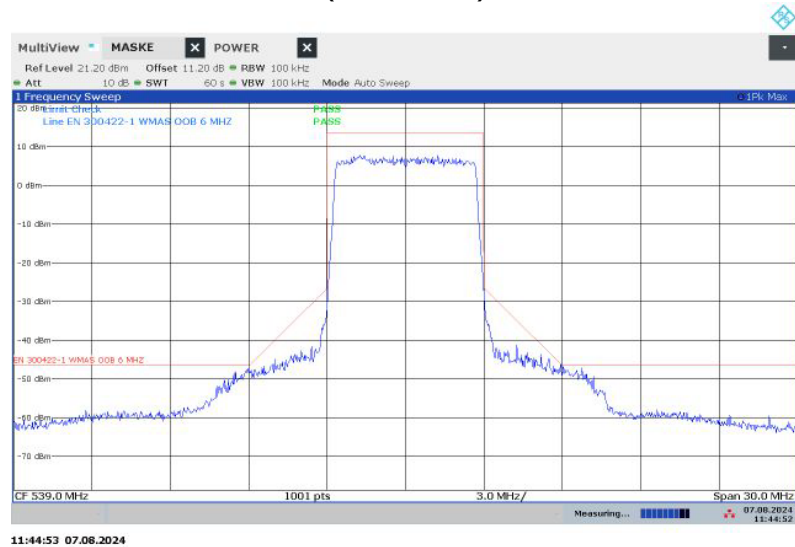

Measurement method = conducted, Temperature = Normal, Operating Frequency = High,
Radio Technology = WMAS
(S02_AA01)

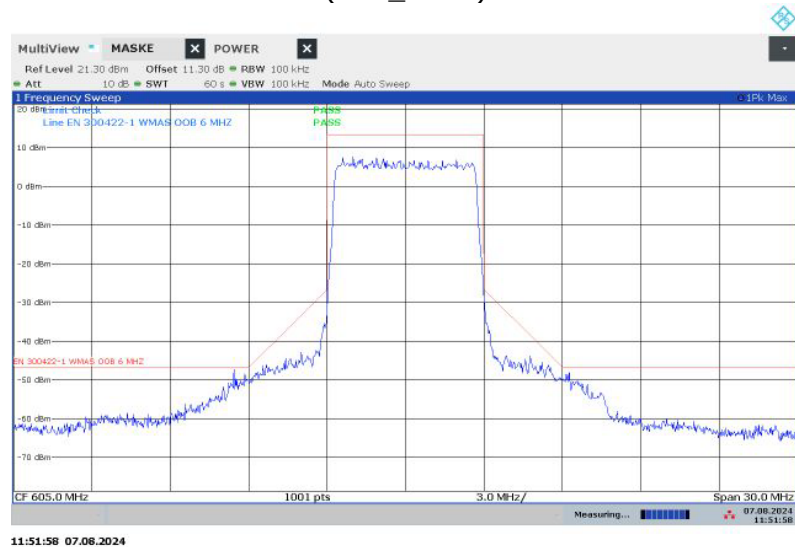

TEST EQUIPMENT USED:
- Radio Lab

7 TEST EQUIPMENT USED FOR TESTS

7.1 TEST EQUIPMENT HARDWARE

1 Radio Lab

Conducted Radio Test Lab

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2024-07	2027-07
1.2	EX520	Digital Multimeter 12	Extech Instruments Corp	05157876	2022-06	2024-06
1.3	Temperature Chamber VT 4002	Temperature Chamber Vötsch 03	Vötsch	58566002150010	2022-05	2024-05
1.4	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
1.5	FSW26	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	104459	2023-05	2025-07
1.6	Opus10 THI	T/H Logger 03	Lufft Mess- und Regeltechnik GmbH	7482	2023-12	2025-12
1.7	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	260001	2023-08	2026-08
1.8	UPL 16	Audio Analyser	Rohde & Schwarz	830695/001	2022-01	2025-01
1.9	10 dB coupler	A2023-10	Atlantic Microwave	-	-	-
1.10	10 dB coupler	A2023-10	Atlantic Microwave	-	-	-

1 Radiated Emissions FAR 2.4 GHz FCC

Radiated emission tests for 2.4 GHz ISM devices in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460/54 740522/P	N/A	N/A
1.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
1.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A
1.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
1.6	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
1.7	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2023-04	2025-04
1.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.9	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Electronic GmbH	00083069	N/A	N/A
1.10	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
1.11	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
1.12	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
1.13	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008	N/A	N/A
1.14	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.0802.033	2023-08	2025-08
1.15	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709	N/A	N/A
1.16	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
1.17	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2021-09	2024-09

2 Radiated Emissions SAC H-Field
Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
2.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
2.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
2.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
2.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
2.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
2.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006		
2.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

3 Radiated Emissions SAC up to 1 GHz
Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
3.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufth Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2024-03	2026-03
3.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
3.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2021-09	2024-09
3.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.7	Opus10 THI (8152.00)	T/H Logger 10	Lufth Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
3.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
3.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10
3.11	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/1192 0513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7.2 TEST EQUIPMENT SOFTWARE

Semi-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
INNCO Mast Controller	1.02.62
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
MATURO Controller	1.24
MATURO Mast	12.19
MATURO Turn-Table	30.10
Fully-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
MATURO Controller	1.30
MATURO Turn-Unit	11.10
MATURO Mast	12.10
MATURO Turntable	12.11
INNCO Controller	1.03.02
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
TS 8997	
WMS32 Measurement Software	11.60.00 (till 2024-03-19), 11.70.00 + Hotfix 01
Conducted AC Emissions:	
Software	Version
EMC32 Measurement Software	10.60.20

8 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

8.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3- Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

8.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF	Corr.	cable loss 1	cable loss 2	cable loss 3	cable loss 4	distance corr.	d _{Limit}	d _{used}
MHz	dB (1/m)	dB	(inside chamber)	(outside chamber)	(switch unit)	(to receiver)	(-40 dB/decade)	(meas. distance (limit))	(meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

8.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency MHz	AF R&S HL562 dB (1/m)	Corr. dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d_{Limit} (meas. distance (limit)) m	d_{used} (meas. distance (used)) m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

8.4 ANTENNA R&S HF907 (1 GHz – 18 GHz)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

8.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency MHz	AF EMCO 3160-09 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (pre- amp) dB	cable loss 3 (inside chamber) dB	cable loss 4 (switch unit) dB	cable loss 5 (to receiver) dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{Limit} (meas. distance (limit))	d _{used} (meas. distance (used))
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26.5	43.4	-11.2	4.4				-9.5	3	1.0
27.0	43.4	-11.2	4.4				-9.5	3	1.0
28.0	43.4	-11.1	4.5				-9.5	3	1.0
29.0	43.5	-11.0	4.6				-9.5	3	1.0
30.0	43.5	-10.9	4.7				-9.5	3	1.0
31.0	43.5	-10.8	4.7				-9.5	3	1.0
32.0	43.5	-10.7	4.8				-9.5	3	1.0
33.0	43.6	-10.7	4.9				-9.5	3	1.0
34.0	43.6	-10.6	5.0				-9.5	3	1.0
35.0	43.6	-10.5	5.1				-9.5	3	1.0
36.0	43.6	-10.4	5.1				-9.5	3	1.0
37.0	43.7	-10.3	5.2				-9.5	3	1.0
38.0	43.7	-10.2	5.3				-9.5	3	1.0
39.0	43.7	-10.2	5.4				-9.5	3	1.0
40.0	43.8	-10.1	5.5				-9.5	3	1.0

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

9 MEASUREMENT UNCERTAINTIES

Parameter	Uncertainty
Occupied channel Bandwidth	$\pm 5\%$
RF Output Power, conducted	$\pm 1.5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3.0 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0 \text{ dB}$
Unwanted emissions, radiated	$\pm 4.5 \text{ dB}$
RF Output power, radiated	$\pm 2.8 \text{ dB}$
Temperature	$\pm 0.3 \text{ }^{\circ}\text{C}$
Humidity	$\pm 3\%$
DC and low frequency voltages	$\pm 1.5\% + 2 \text{ digits}$
Time	$\pm 5\%$
Duty Cycle	$\pm 5\%$

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

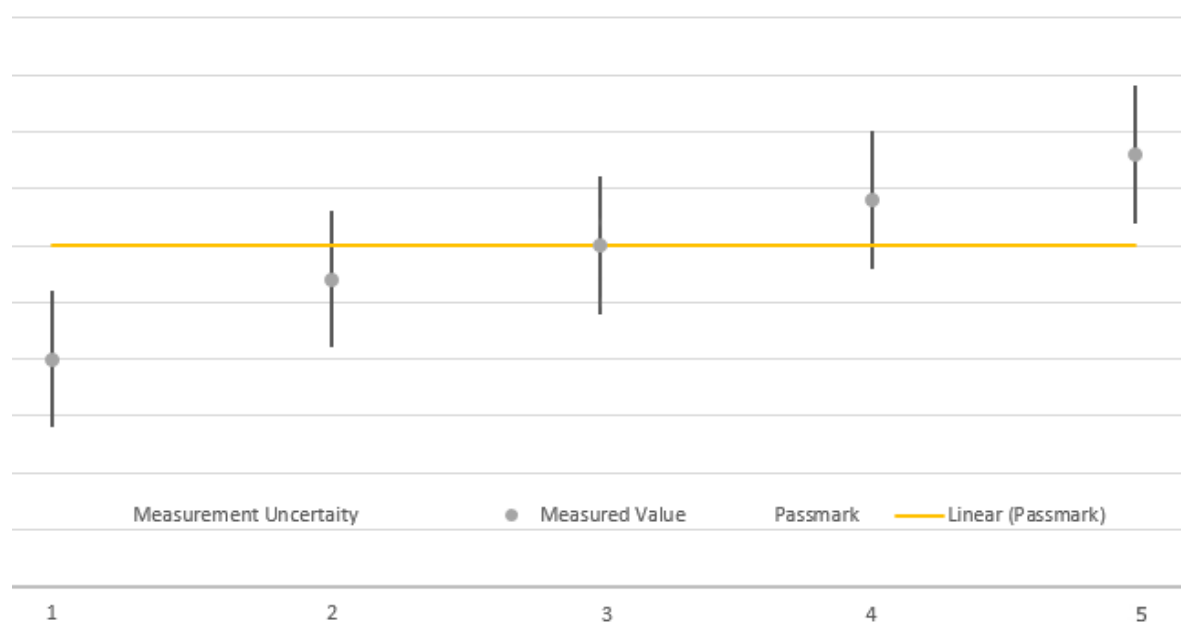

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

10 PHOTO REPORT

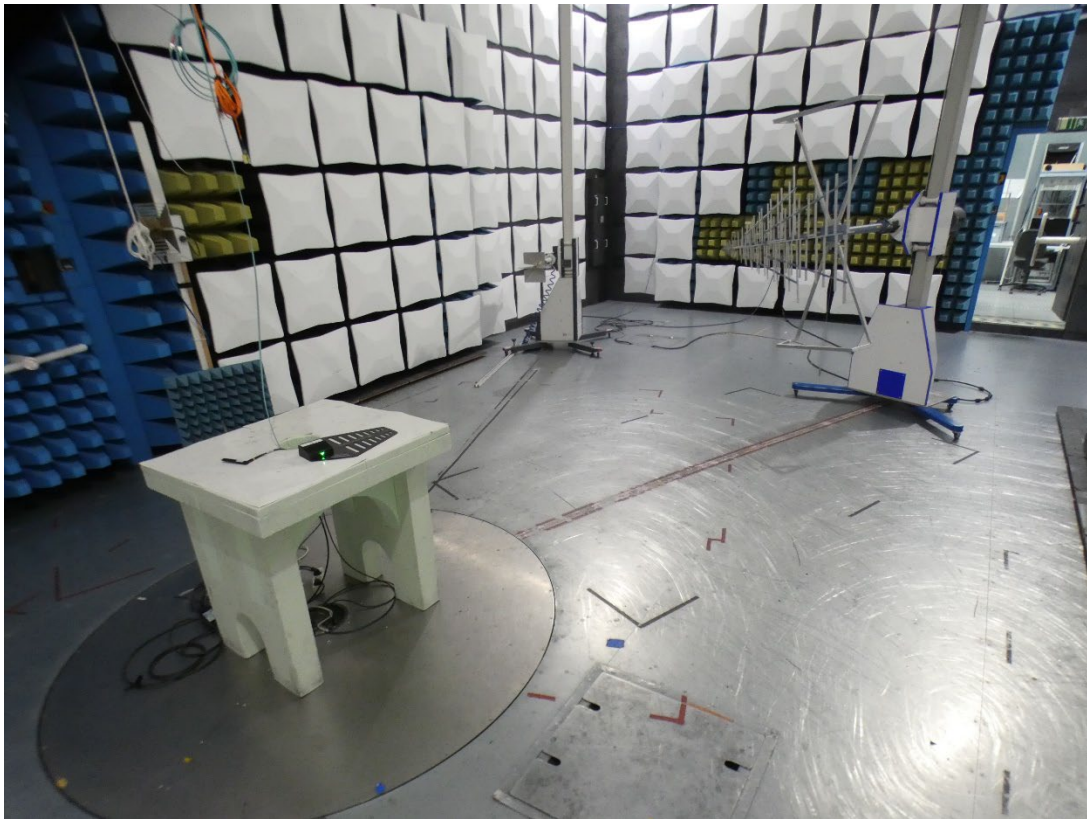


Photo 1: Setup Spurious Emissions Radiated (SAC), < 1 GHz

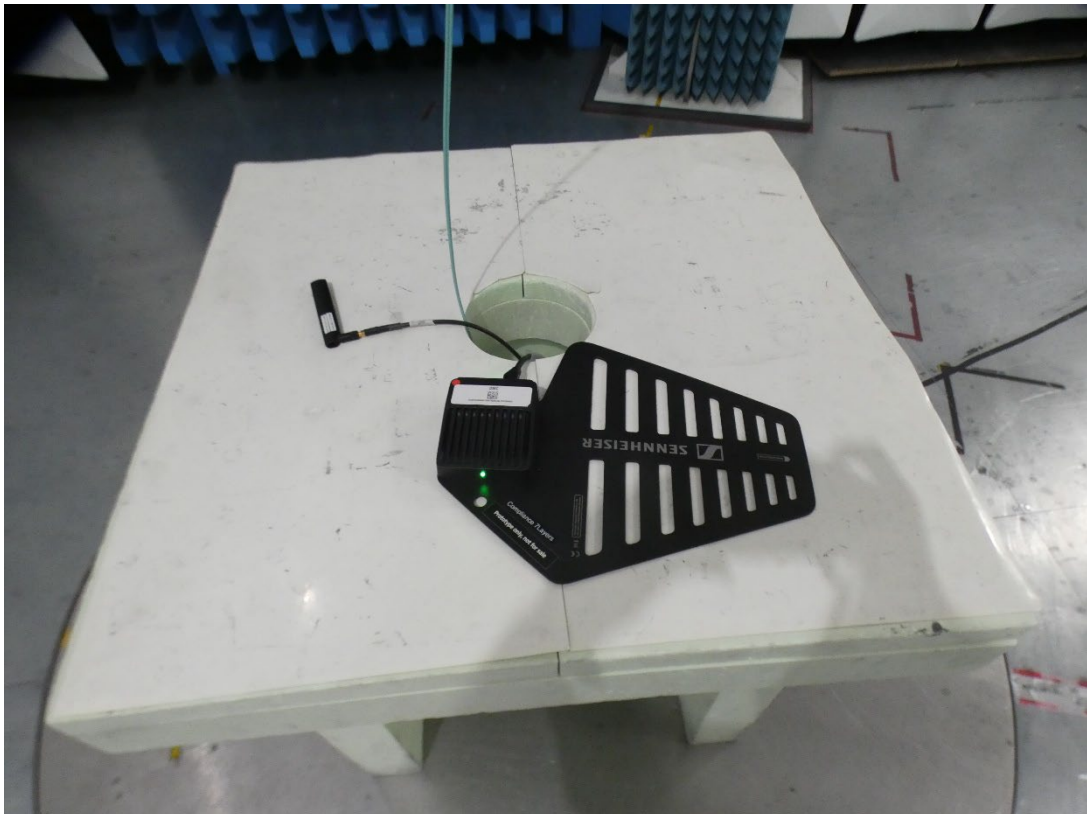


Photo 2: Setup Spurious Emissions Radiated (SAC), < 1 GHz, detail view



Photo 3: Setup Spurious Emissions Radiated (FAC), > 1GHz



Photo 3: Setup Spurious Emissions Radiated (FAC), > 1GHz, detail view

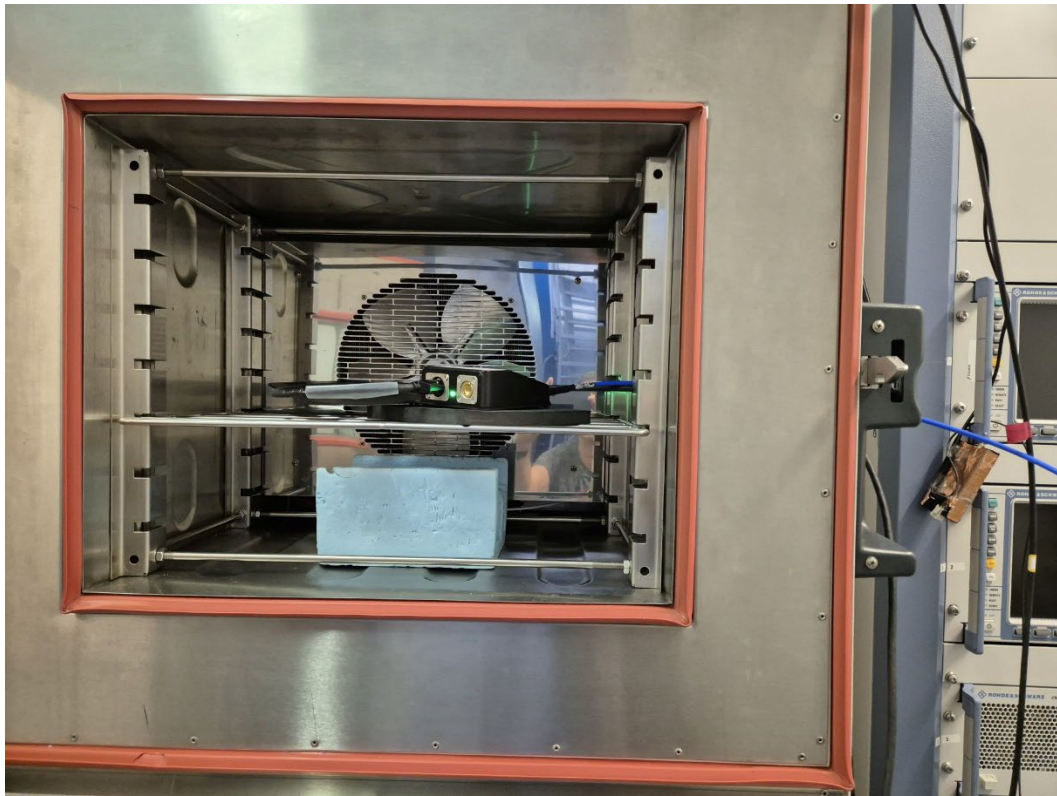


Photo 4: Setup conducted tests, frequency stability in climatic chamber

*****END OF TEST REPORT*****