

## FCC Part 22 Transmitter Certification

### Test Report

**FCC ID: DNY0C5EKLIT0800**

**FCC Rule Part: CFR 47 Part 22 Subpart H**

**ACS Report Number: 05-0459-22H**

Manufacturer: EMS Wireless  
Equipment Type: Cellular Fiber-optic RF Distribution Remote Unit  
Model: EkoLite II 800

Test Begin Date: January 6, 2006

Test End Date: February 8, 2006

Report Issue Date: March 14, 2006



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612

Prepared by: *Ken Rivers*  
Ken Rivers  
Engineering Technician  
ACS, Inc.

Reviewed by: *[Signature]*  
Kirby Munroe  
Manager Wireless Certifications  
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains **13** pages

# Table of Contents

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.3 Technical Specifications	3
1.4 EUT Operating Configuration and Test Conditions	4
<b>2.0 Location of Test Facility</b>	4
2.1 Location	4
2.2 Laboratory Accreditations/Recognitions/Certifications	4
2.3 Radiated Emissions Test Site Description	5
2.3.1 Semi-Anechoic Chamber Test Site	5
2.3.2 Open Area Tests Site (OATS)	6
2.4 Conducted Emissions Test Site Description	7
<b>3.0 Applicable Standards and References</b>	7
<b>4.0 List of Test Equipment</b>	8
<b>5.0 Support Equipment and Accessories</b>	9
<b>6.0 EUT Setup and Block Diagram</b>	9
<b>7.0 Summary of Tests</b>	10
7.1 RF Power Output	10
7.1.1 Measurement Procedure	10
7.1.2 Measurement Results	10
7.2 Occupied Bandwidth (Emission Limits)	10
7.2.1 Measurement Procedure	10
7.2.2 Measurement Results	10
7.3 Spurious Emissions at Antenna Terminals and Inter-modulation Products	11
7.3.1 Measurement Procedure	11
7.3.2 Measurement Results	11
7.4 Band-edge Compliance	12
7.4.1 Measurement Procedure	12
7.4.2 Measurement Results	12
7.5 Field Strength of Spurious Emissions	12
7.5.1 Measurement Procedure	12
7.5.2 Measurement Results	12
7.6 Frequency Stability	13
7.7 Radiated Emissions (Unintentional Radiators)	13
7.7.1 Measurement Procedure	13
7.7.2 Measurement Results	13
7.8 Power Line Conducted Emissions	13

## **Additional Exhibits Included In Filing**

Internal Photographs

Test Setup Photographs

RF Exposure – MPE Calculations

Theory of Operation

System Block Diagram

Schematics

External Photographs

Product Labeling

Installation/Users Guide

Parts List

Tune-up Procedure

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J and Part 22 Subpart H of the FCC’s Code of Federal Regulations.

### 1.2 Product Description

The EkoLite II System is designed to distribute Cellular and PCS radio signals within a building or campus of buildings where coverage/capacity would be otherwise impeded. Using fiber optics to distribute the signals, and a network of local antennas, the coverage area can be greatly enhanced. In an alternative system that covers a building by distributing radio base stations, one must add a base station in that area when faced with the problem of poor coverage in one section. Thus, capacity is added to a section which might not need it. Similarly, when faced with a capacity problem in a portion of the building, one would need an additional base station regardless of whether additional coverage is required.

The EkoLite II 800 is part of a product line that consists of a 1900 PCS version as well as higher power versions known as the EkoLink II 800 and 1900. Some documents contained in this filing may reference other models, configurations, or system components but the purpose of this report is to show compliance for the EkoLite II 800 MHz remote unit only.

Detailed photographs of the EUT are filed separately with this filing.

### 1.3 Technical Specifications

**Table 1.3-1: Specifications**

PARAMETER		SPECIFICATIONS
Passband:	Cellular	869 to 894 MHz
Optical Connectors		SC/APC
Wavelength	Uplink	1310 nm ± 30 nm
	Downlink	1310 nm ± 30 nm
Optical Output Power (at I-Ith = 40 mA)		0 dBm ± 2 dB typical
Optical Return Loss		> 40 dB
LED Indicators		Green: Normal Operation Other than Green: Alarm
External DC Power		20 - 48 V ± 1 V at 0.4 A
Supply Requirement		(Max Ripple: <170 mV pp
Dimensions		6.78" x 6.78" x 4.35" (17.2 cm x 17.2 cm x 11.0 cm)
Weight (approximate)		2 lbs (0.9 kg)
Max Uplink RF Input Power		-10 dBm Max (no damage)
Downlink RF Output Power		+12 dBm (normal operation)
Temperature Range		
Performance to Full Spec		5oC to 40oC
Operating		0oC to 50oC
Storage		-20oC to 65oC
Relative Humidity		
Operating		20 to 55%
Short Term		10 to 80% (not exceeding 0.024 lbs water/dry air)

### **1.4 EUT Operating Configuration and Test Conditions**

The EUT was configured and tested utilizing the maximum input drive level resulting in maximum gain conditions for all tests. If the maximum input drive level is exceeded, internal attenuators are activated to produce a level RF output and eliminate the device from operating beyond the maximum RF output power that is below the saturated RF output power.

## **2.0 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450

Industry Canada Lab Code: IC 4175

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612

**2.3 Radiated Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

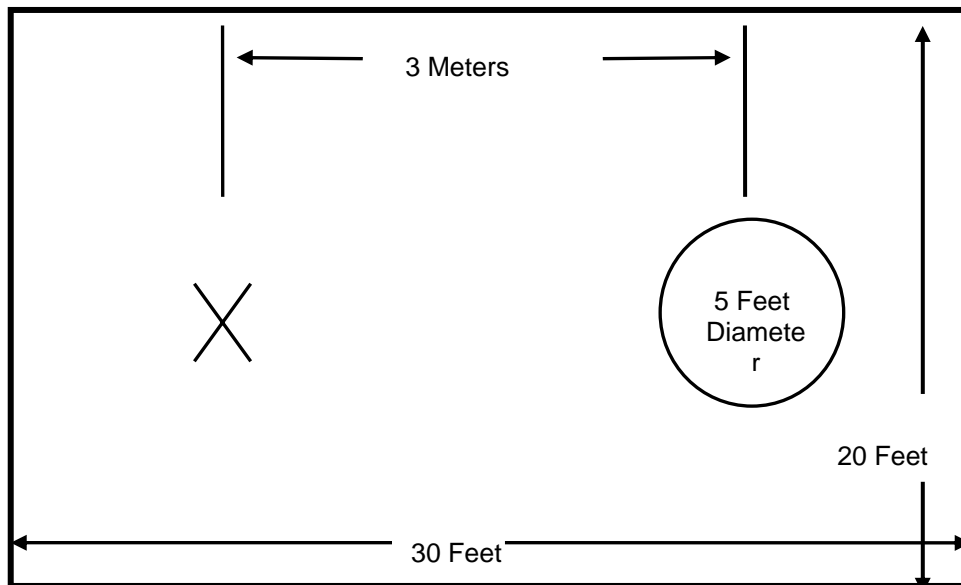

**Figure 2.3-1: Semi-Anechoic Chamber Test Site**

**2.3.2 Open Area Tests Site (OATS)**


The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

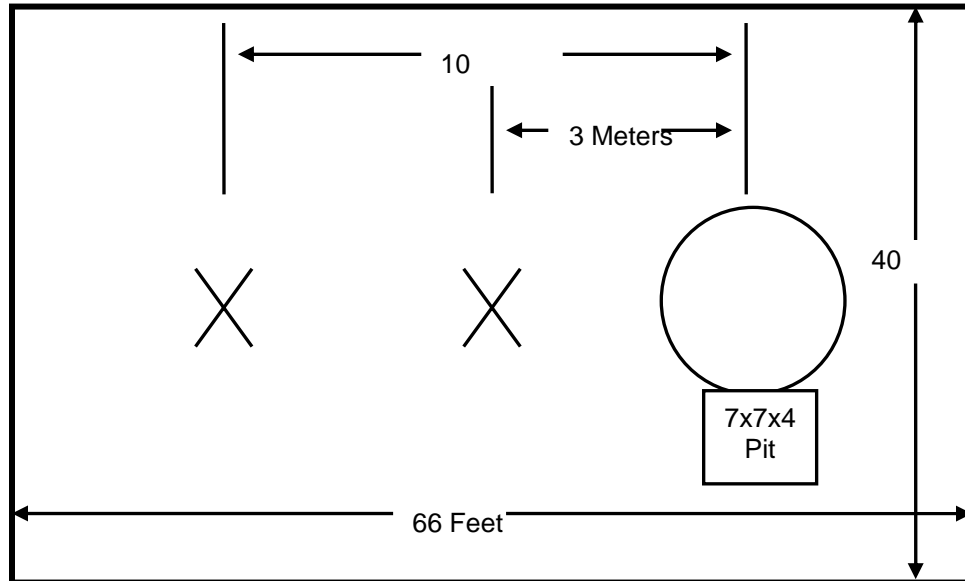

**Figure 2.3-2: Open Area Test Site**

**2.4 Conducted Emissions Test Site Description**

The AC mains conducted EMI site is a shielded room with the following dimensions:

- Height: 3.0 Meters
- Width: 3.6 Meters
- Length: 4.9 Meters

The room is manufactured by Rayproof Corporation and installed by Panashield, Inc. Earth ground is provided to the room via an 8' copper ground rod. Each panel of the room is connected electrically at intervals of 4".

Power to the room is filtered to prevent ambient noise from coupling to the EUT and measurement equipment. Filters are models 1B42-60P manufactured by Rayproof Corporation.

The room is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 2.4-1:

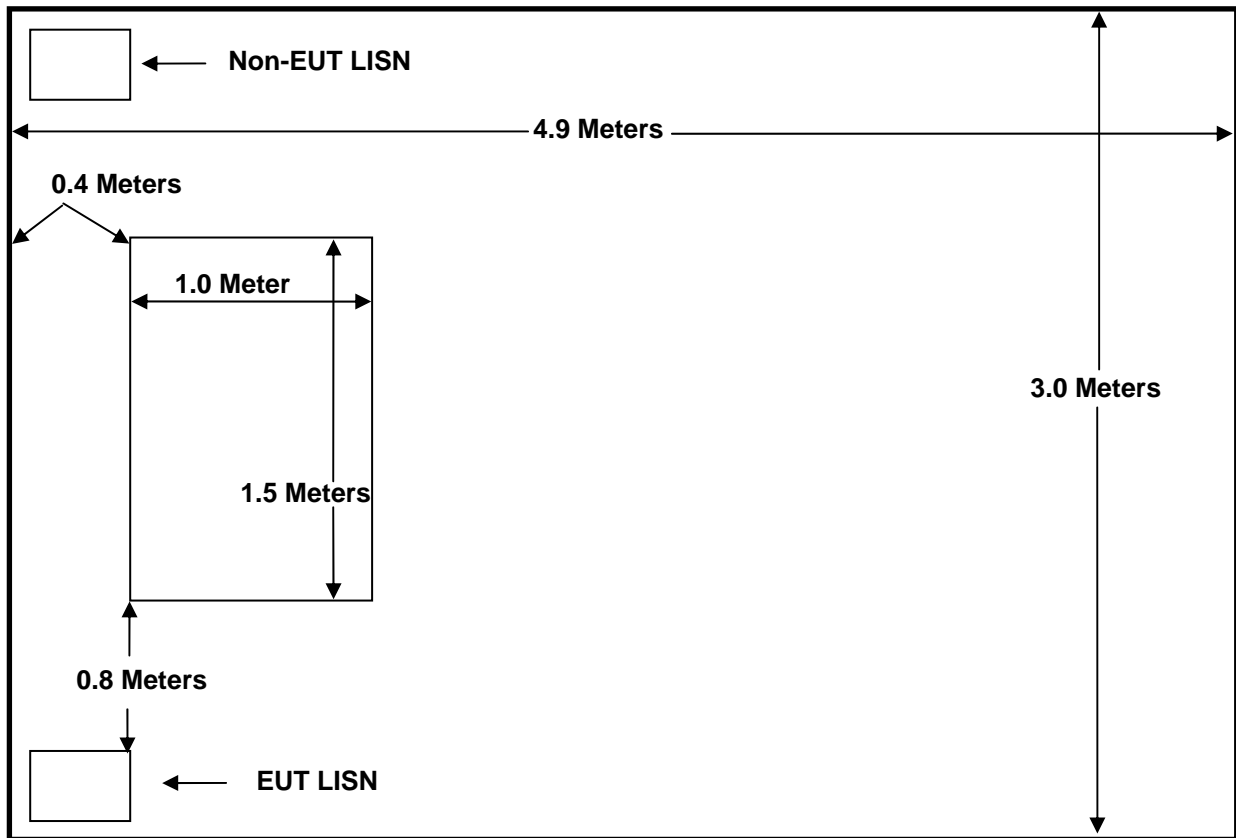


Figure 2.4-1: AC Mains Conducted EMI Site

**3.0 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 22, Subpart H: Cellular Radiotelephone Service

#### 4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
<input type="checkbox"/> 25	Chase	Bi-Log Antenna	CBL6111	1043	5/23/06
<input type="checkbox"/> 268	Agilent	Sensor	N1921A	MY45240184	10/10/06
<input type="checkbox"/> 041	ElectroMetrics	Bi-Con Antenna	BIA-25	2925	5/25/06
<input type="checkbox"/> 090	ElectroMetrics	LPA Antenna	LPA-25	1476	5/27/06
<input type="checkbox"/> 152	EMCO	LISN	3825/2	9111-1905	1/18/06
<input type="checkbox"/> 153	EMCO	LISN	3825/2	9411-2268	12/5/06
<input type="checkbox"/> 225	Andrew	OATS RF cable	Heliacx	225	1/07/07
<input type="checkbox"/> 165	ACS	Conducted EMI Cable Set	RG8	165	1/06/06
<input type="checkbox"/> 22	Agilent	Pre-Amplifier	8449B	3008A00526	5/06/06
<input type="checkbox"/> 73	Agilent	Pre-Amplifier	8447D	272A05624	5/18/06
<input type="checkbox"/> 30	Spectrum Technologies	Horn Antenna	DRH-0118	970102	5/09/06
<input type="checkbox"/> 105	Microwave Circuits	High Pass Filter	H1G810G1	2123-01 DC0225	9/13/06
<input type="checkbox"/> 209	Microwave Circuits	High Pass Filter	H3G020G2	4382-01 DC0421	9/20/06
<input type="checkbox"/> 1	Rohde & Schwarz	Receiver Display	804.8932.52	833771/007	3/07/06
<input type="checkbox"/> 2	Rohde & Schwarz	ESMI Receiver	1032.5640.53	839587/003	3/07/06
<input type="checkbox"/> 3	Rohde & Schwarz	Receiver Display	804.8932.52	839379/011	11/02/06
<input type="checkbox"/> 4	Rohde & Schwarz	ESMI Receiver	1032.5640.53	833827/003	11/02/06
<input type="checkbox"/> ---	Agilent	Spectrum Analyzer	E7405A	US39110103	6/6/06
<input type="checkbox"/> 213	Test Equipment Corp.	Pre-Amplifier	PA-102	44927	12/5/06
<input type="checkbox"/> 211	Eagle	Band Reject Filter	C7RFM3NFNM	n/a	1/07/07
<input type="checkbox"/> 168	Hewlett Packard	Pulse Limiter	11947A	3107A02268	3/2/06
<input type="checkbox"/> 93	Chase	EM Clamp	CIC 8101	65	1/09/07
<input type="checkbox"/> 204	ACS	Cable	RG8	204	3/16/06
<input type="checkbox"/> 6	Harbour Industries	HF RF Cable	LL-335	00006	3/16/06
<input type="checkbox"/> 7	Harbour Industries	HF RF Cable	LL-335	00007	3/16/06
<input type="checkbox"/> 208	Harbour Industries	HF RF Cable	LL142	00208	6/24/06
<input type="checkbox"/> 5	Chase RF Current Probe	Current Probe	CSP-8441	19	1/06/06
<input type="checkbox"/> 167	ACS	Chamber EMI Cable Set	RG6	167	1/7/07
<input type="checkbox"/> 204	ACS	Chamber EMI RF cable	RG8	204	3/16/06
<input type="checkbox"/> 237	Gigatronics	Signal Generator	900	282706	1/10/07
<input type="checkbox"/> 267	Agilent	Power Meter	N1911A	MY45100129	10/30/06
<input type="checkbox"/> ---	Schaffner	ESD Generator	NSG 438	409	5/5/06




### 5.0 SUPPORT EQUIPMENT AND ACCESSORIES

**Table 5-1: Support Equipment and Accessories**

Diagram	Manufacturer	Equipment Type	Model Number	Serial Number	FCC ID
Power Supply	HP	Power Supply	6286A	2109A-06095	NA
Amplifier	Hughes	Amplifier	1177H09F00	185	NA
Sig. Gen.	Agilent	Signal Generator	E4437B	US39260478	NA

### 6.0 EQUIPMENT UNDER TEST SETUP AND BLOCK DIAGRAM

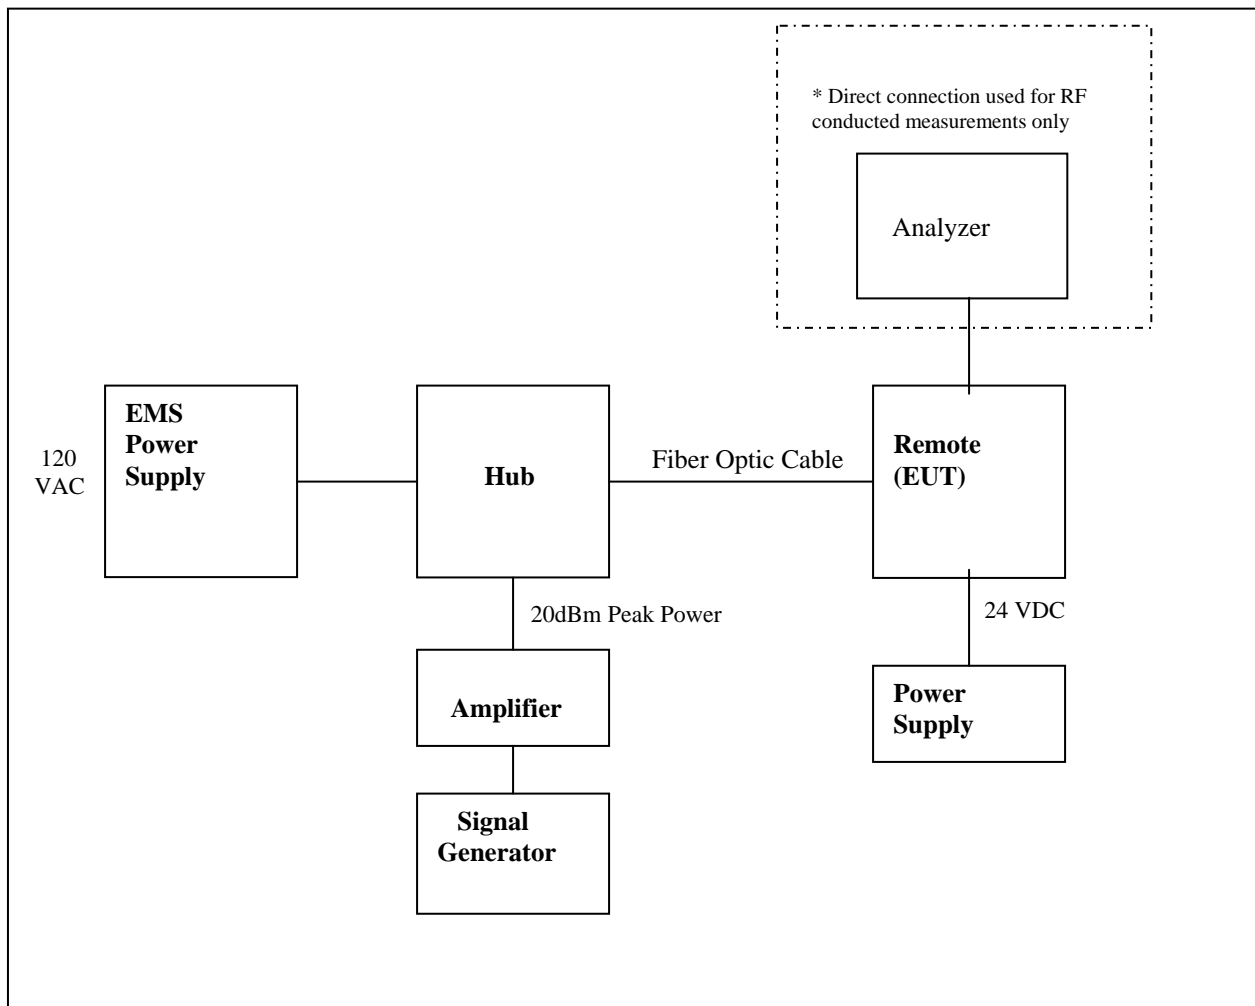

**Figure 6-1: EUT Test Setup**

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document. Data plots can be found in the test report appendix 05-0459-22H-A.

### 7.1 RF Power Output

#### 7.1.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The resolution and video bandwidths of the spectrum analyzer were set at sufficient levels, >> emission bandwidth, to produce accurate results. The analyzer was set for Max Hold using a peak detector. Results are shown below in Table 7.1-1.

#### 7.1.2 Measurement Results

**Table 7.1-1: Peak Output Power**

Modulation	Channel	Frequency (MHz)	RF Power Output (dBm)
CDMA	Low	869.70	12.11
CDMA	Middle	881.52	12.60
CDMA	High	893.31	12.09
TDMA	Low	868.89	12.65
TDMA	Middle	881.66	12.94
TDMA	High	893.92	12.09
GSM	Low	869.12	12.63
GSM	Middle	881.66	12.71
GSM	High	893.89	12.03

### 7.2 Occupied Bandwidth (Emission Limits)

#### 7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth. The analyzer was set for Max Hold using a peak detector. Both the input and output bandwidths were evaluated to show similar characteristics of the emissions. Results are shown below in Table 7.2-1.

#### 7.2.2 Measurement Results

Occupied bandwidth plots are listed below and are supplied in the test report appendix 05-0459-22H-A.

**Table 7.2-1: Occupied Bandwidth**

Modulation	Channel	Frequency (MHz)	Plot Reference
CDMA	Middle	881.49	Figure 1.
TDMA	Middle	881.50	Figure 2.
GSM	Middle	881.16	Figure 3.

## 7.3 Spurious Emissions at Antenna Terminals and Inter-modulation Products

### 7.3.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. For inter-modulation products the three tone method was used with the device operating at maximum drive levels. Three tones were placed at the lower band-edge and adjusted such that the third order harmonics were maximized and within the operating frequency band. Inter-modulation products were tested using TDMA, CDMA, and CW signals. CW covers FM (GSM and F1D) for inter-modulation products. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth

For out of band spurious emissions the spectrum analyzer resolution and video bandwidths were set to 1 MHz according to Section 22.917 (b). The spectrum was investigated for the 30 MHz to 10 GHz in accordance to CFR 47 Part 2.1057. The analyzer was set for Max Hold using a peak detector. Spurious emissions were evaluated for all modulation modes.

### 7.3.2 Measurement Results

Emission plots are listed below in Table 7.3-1 and plots are supplied in the test report appendix 05-0459-22H-A.

**Table 7.3-1: Spurious Emissions**

Modulation	Channel	Frequency Range (MHz)	Plot Reference
CDMA	Low	In Band	Figure 4.
CDMA	Low	30 – 2500	Figure 5.
CDMA	Low	2500 - 10000	Figure 6.
CDMA	Middle	30 – 2500	Figure 7.
CDMA	Middle	2500 - 10000	Figure 8.
CDMA	High	30 – 2500	Figure 9.
CDMA	High	2500 - 10000	Figure 10.
TDMA	Low	In Band	Figure 11.
TDMA	Low	30 – 2500	Figure 12.
TDMA	Low	2500 - 10000	Figure 13.
TDMA	Middle	30 – 2500	Figure 14.
TDMA	Middle	2500 - 10000	Figure 15.
TDMA	High	30 – 2500	Figure 16.
TDMA	High	2500 - 10000	Figure 17.
CW	Low	In Band	Figure 18.
CW	Low	30 – 2500	Figure 19.
CW	Low	2500 - 10000	Figure 20.
GSM	Low	30 – 2500	Figure 21.
GSM	Low	2500 - 10000	Figure 22.
GSM	Middle	30 – 2500	Figure 23.
GSM	Middle	2500 - 10000	Figure 24.
GSM	High	30 – 2500	Figure 25.
GSM	High	2500 - 10000	Figure 26.

## 7.4 Band-edge Compliance

### 7.4.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth. The analyzer was set for Max Hold using a peak detector. The center frequency was set to both the upper and lower cellular frequency block edges.

### 7.4.2 Measurement Results

Band-edge plots in are listed in Table 7.4-1 below and are supplied in the test report appendix 05-0459-22H-A.

**Table 7.4-1: Band-edge**

Modulation	Channel	Frequency (MHz)	Plot Reference
CDMA	Low	869.70	Figure 27.
CDMA	High	893.31	Figure 28.
TDMA	Low	869.89	Figure 29.
TDMA	High	893.92	Figure 30.
GSM	Low	869.12	Figure 31.
GSM	High	893.89	Figure 32.

## 7.5 Field Strength of Spurious Emissions

### 7.5.1 Measurement Procedure

The equipment under test is placed on the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057. A CW was used for low, middle and high channels. The worst case emissions are reported. All emissions not reported were below the noise floor of the measurement equipment.

Results of the test are shown below.

### 7.5.2 Measurement Results

The magnitude of all spurious emissions were below the noise of the measurement equipment and therefore not reported.

## 7.6 Frequency Stability - FCC Section 2.1055

The device performs no frequency translation therefore frequency stability requirements are not applicable.

## 7.7 Radiated Emissions (Unintentional Radiators) - FCC Section 15.109

### 7.7.1 Measurement Procedure

The equipment under test is placed on the Open Area Test Site (described in section 2.1) on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector for frequencies below 1000 MHz and an Average detector function for frequencies above 1000 MHz. This repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) – Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Results of the test are shown below in Table 7.7.-1.

### 7.7.2 Measurement Results

**Table 7.7-1: Radiated Emissions Tabulated Data**

Frequency (MHz)	Uncorrected Reading (dBμV/m)	Antenna Polarity (H/V)	Total Correction Factor (dB)	Corrected Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)
31.86	32.28	V	-14.74	17.54	39	21.5
58.95	28.88	V	-13.89	14.99	39	24.0
61.26	39.46	V	-14.62	24.84	39	14.2
146.6	29.09	V	-12.62	16.47	43.5	27.0
175.4	30.67	V	-7.89	22.78	43.5	20.7
92.23	20.32	V	15.12	35.44	43.5	8.1
108.7	17.96	V	17.44	35.40	43.5	8.1
618.4	23.58	H	-5.31	18.27	46.5	28.2
797.7	26.94	H	-1.98	24.96	46.5	21.5

## 7.8 Power Line Conducted Emissions - FCC Section 15.107

The EkoLite II 800 is DC powered from a separate external power supply therefore Power Line Conducted Emissions is not required.

**END Report**