

FCC Test Report

Report No.: RF140910C20F

FCC ID: E2K-APL270B1

Test Model: APL27-0B1

Received Date: Sep. 10, 2014

Test Date: Sep. 23 ~ Oct. 15, 2014

Issued Date: Oct. 16, 2015

Applicant: Dell Inc.

Address: One Dell Way, Round Rock, Texas 78682, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Set Up	18
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	39
4.2.1 Limits of Conducted Emission Measurement	39
4.2.2 Test Instruments	39
4.2.3 Test Procedures	40
4.2.4 Deviation from Test Standard	40
4.2.5 Test Setup	40
4.2.6 EUT Operating Conditions	40
4.2.7 Test Results	41
4.3 Transmit Power Measurement	43
4.3.1 Limits of Transmit Power Measurement	43
4.3.2 Test Setup	43
4.3.3 Test Instruments	43
4.3.4 Test Procedure	44
4.3.5 Deviation from Test Standard	44
4.3.6 EUT Operating Conditions	44
4.3.7 Test Result	45
4.4 Peak Power Spectral Density Measurement	54
4.4.1 Limits of Peak Power Spectral Density Measurement	54
4.4.2 Test Setup	54
4.4.3 Test Instruments	54
4.4.4 Test Procedures	54
4.4.5 Deviation from Test Standard	54
4.4.6 EUT Operating Conditions	54
4.4.7 Test Results	55
4.5 Frequency Stability	58
4.5.1 Limits of Frequency Stability Measurement	58
4.5.2 Test Setup	58
4.5.3 Test Instruments	58
4.5.4 Test Procedure	58
4.5.5 Deviation from Test Standard	58
4.5.6 EUT Operating Condition	58



4.5.7 Test Results 59

5 Pictures of Test Arrangements..... 60

Appendix – Information on the Testing Laboratories 61



A D T

Release Control Record

Issue No.	Description	Date Issued
RF140910C20F	Original release.	Oct. 16, 2015

1 Certificate of Conformity

Product: Wireless Access Point

Brand: DELL, DELL SONICWALL, SONICWALL

Test Model: APL27-0B1

Sample Status: Engineering sample

Applicant: Dell Inc.

Test Date: Sep. 23 ~ Oct. 15, 2014

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Date:

Oct. 16, 2015

Pettie Chen / Senior Specialist

Approved by :



Date:

Oct. 16, 2015

Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -2.24dB at 28.55078MHz.
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5350.00, 5470.00, 5725.00MHz.
15.407(a)(1/2 /3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Access Point
Brand	DELL, DELL SONICWALL, SONICWALL
Test Model	APL27-0B1
Status of EUT	Engineering sample
Power Supply Rating	52Vdc from PoE
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 450Mbps 802.11ac: up to 1299.9Mbps
Operating Frequency	5260 ~ 5320MHz, 5500 ~ 5700MHz
Number of Channel	5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 2 for 802.11n (40MHz), 802.11ac (40MHz) 1 for 802.11ac (80MHz) 5500 ~ 5700MHz: 11 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 5 for 802.11n (40MHz), 802.11ac (40MHz) 2 for 802.11ac (80MHz)
Output Power	5260 ~ 5320MHz: 180.186mW 5500 ~ 5700MHz: 212.823mW
Antenna Type	Refer to Note
Antenna Connector	IPEX
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report of BV ADT report no.: RF140910C20A. The difference compared with the original report is updating standard to new rule version.
2. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

Modulation Mode	TX FUNCTION
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX
802.11ac (20MHz)	3TX
802.11ac (40MHz)	3TX
802.11ac (80MHz)	3TX

*The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

3. The EUT uses following PoE. (Support units only)

PoE	
Model	PE911
Input	100~240Vac, 50/60Hz
Output	52Vdc, 0.5A
Power Cord	1m non-shielded cable without core

4. The following antennas were provided to the EUT.



Ant. Type		PIFA antenna									
Ant.	Frequency (MHz)										
Gain(dBi)	2400	2450	2500	5150	5250	5350	5450	5550	5650	5750	5850
Ant 1	2.87	2.84	3.88	-	-	-	-	-	-	-	-
Ant 2	2.33	2.49	4.29	-	-	-	-	-	-	-	-
Ant 3	2.92	2.85	3.73	-	-	-	-	-	-	-	-
Ant 4	-	-	-	5.41	5.25	5.89	5.71	6.09	5.89	5.83	5.57
Ant 5	-	-	-	5.78	5.66	5.97	6.13	5.66	5.94	5.01	5.18
Ant 6	-	-	-	5.94	5.76	6.04	5.35	4.94	5.14	5.13	5.51

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
58	5290 MHz

FOR 5500 ~ 5700MHz

11 channels are provided for 802.11a, 802.11n (20MHz):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

5 channels are provided for 802.11n (40MHz):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

2 channels are provided for 802.11ac (80MHz):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
-	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
-	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
-	802.11ac (80MHz)		58	58	OFDM	BPSK	97.5
-	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
-	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	7.2
-	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0
-	802.11ac (80MHz)		106	106	OFDM	BPSK	97.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5260-5320	52 to 64	60	OFDM	BPSK	6.0
		5500-5700	100 to 140		OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5260-5320	52 to 64	60	OFDM	BPSK	6.0
		5500-5700	100 to 140		OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
-	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
-	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
-	802.11ac (80MHz)		58	58	OFDM	BPSK	97.5
-	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
-	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	7.2
-	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0
-	802.11ac (80MHz)		106	106	OFDM	BPSK	97.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE _≥ 1G	26deg. C, 64%RH	120Vac, 60Hz	Alan Wu
RE _{<} 1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	23deg. C, 74%RH	120Vac, 60Hz	Brad Tung
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor is required.


802.11a: Duty cycle = $2.02/2.097 = 0.963$, Duty factor = $10 * \log(1/0.963) = 0.16$

802.11n (20MHz): Duty cycle = $1.879/1.951 = 0.963$, Duty factor = $10 * \log(1/0.963) = 0.16$


802.11n (40MHz): Duty cycle = $0.925/0.995 = 0.93$, Duty factor = $10 * \log(1/0.93) = 0.32$

802.11ac (80MHz): Duty cycle = $0.456/0.516 = 0.881$, Duty factor = $10 * \log(1/0.884) = 0.54$


802.11a

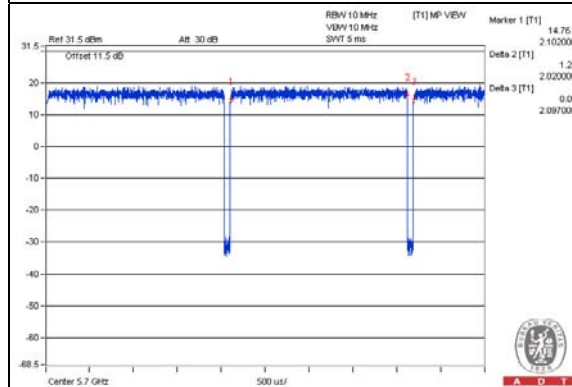


802.11n (20MHz)

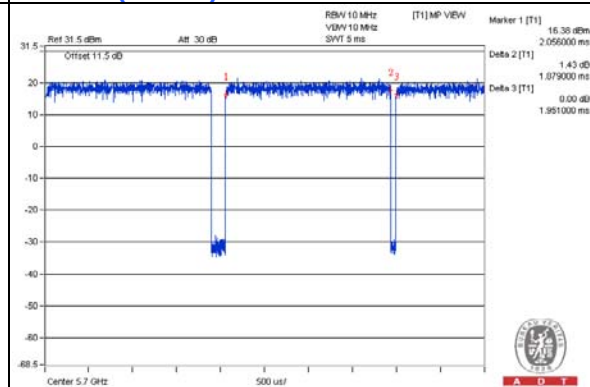

802.11n (40MHz)

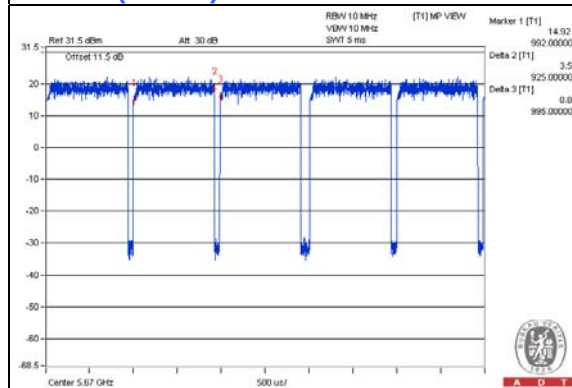

802.11ac (80MHz)

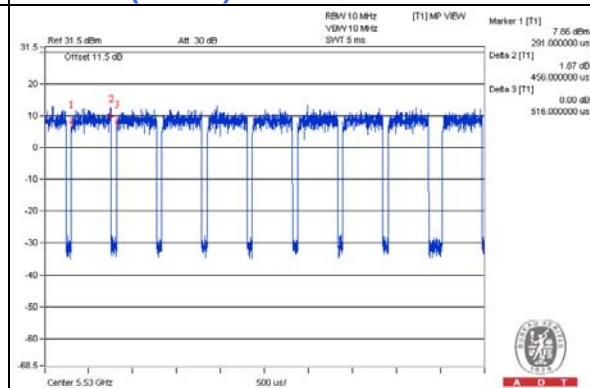

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	PoE	NA	PE911	NA	NA	Provided by client.
C.	Dongle	SANDISK	SDCZ6-1024	NA	NA	-
D.	Load	NA	NA	NA	NA	-


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A, B acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	10	N	0	Cat5e
2.	RJ45 to RS232 cable	1	1.8	N	0	-
3.	RJ45 cable	1	1.8	N	0	Cat5e
4.	RJ45 cable	1	1.8	N	0	Cat5e

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

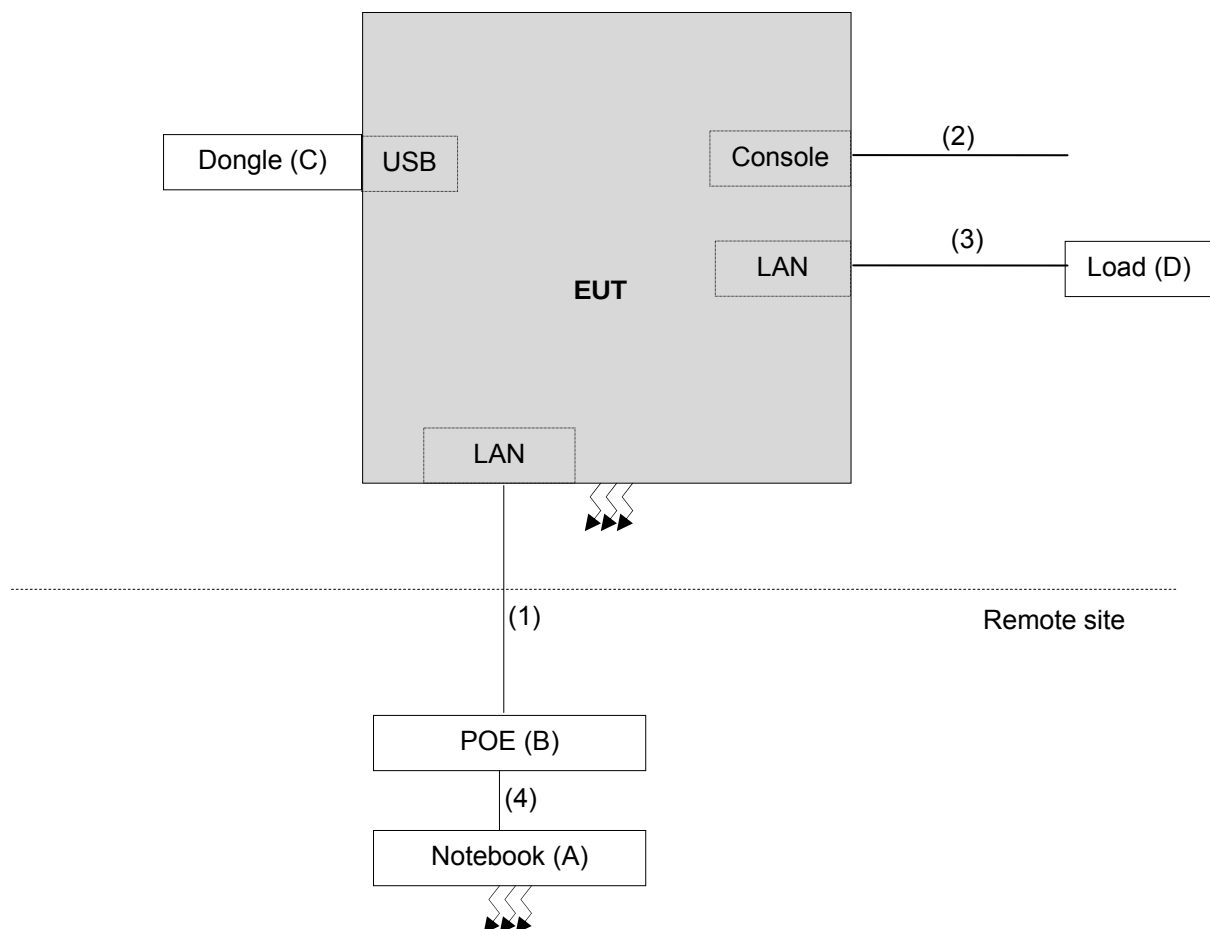

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedure New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Jan. 02, 2014	Jan. 01, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Mar. 03, 2014	Mar. 02, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 17, 2014	Feb. 16, 2015
Preamplifier Agilent	8447D	2944A10638	Aug. 09, 2014	Aug. 08, 2015
Preamplifier Agilent	8449B	3008A01961	Oct. 28, 2013	Oct. 27, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 09, 2014	Jun. 08, 2015

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 3.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 988962.

5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

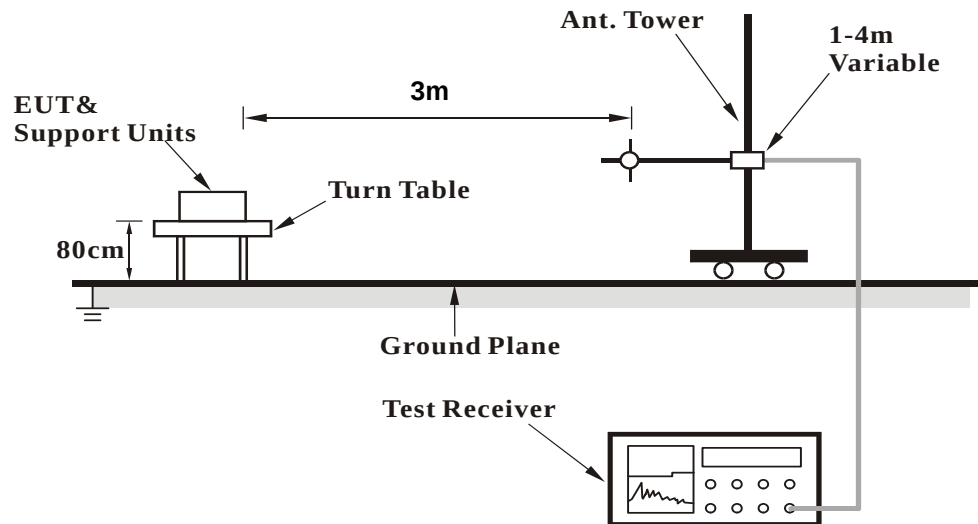

<Frequency Range above 1GHz>

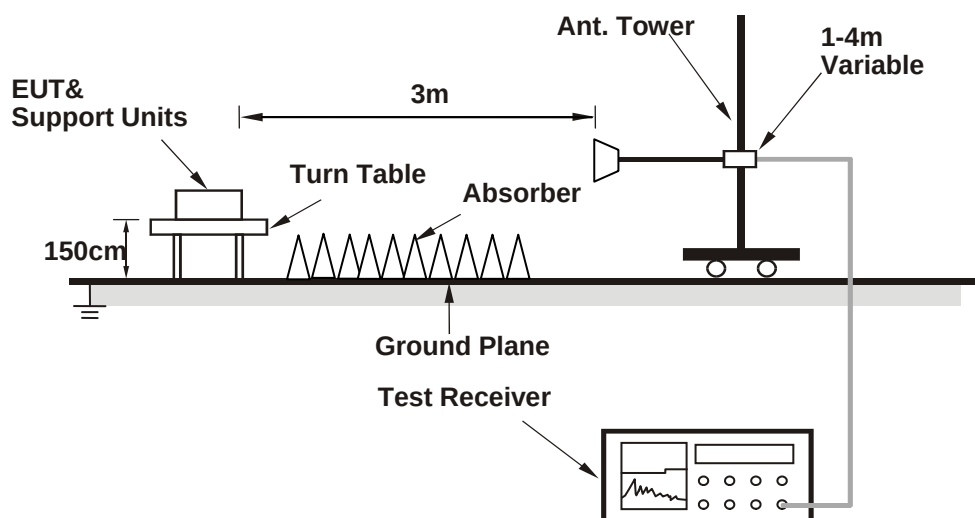

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz Data

802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.37 H	14	52.50	6.40
2	5150.00	47.0 AV	54.0	-7.0	1.37 H	14	40.60	6.40
3	*5260.00	119.2 PK			1.42 H	32	79.20	40.00
4	*5260.00	108.7 AV			1.42 H	32	68.70	40.00
5	#10520.00	59.9 PK	74.0	-14.1	1.05 H	162	40.60	19.30
6	#10520.00	47.5 AV	54.0	-6.5	1.05 H	162	28.20	19.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.00 V	0	52.50	6.40
2	5150.00	47.2 AV	54.0	-6.8	1.00 V	0	40.80	6.40
3	*5260.00	119.9 PK			1.00 V	32	79.90	40.00
4	*5260.00	109.8 AV			1.00 V	32	69.80	40.00
5	#10520.00	59.9 PK	74.0	-14.1	1.02 V	240	40.60	19.30
6	#10520.00	47.6 AV	54.0	-6.4	1.02 V	240	28.30	19.30

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	116.6 PK			1.00 H	20	76.60	40.00
2	*5300.00	106.8 AV			1.00 H	20	66.80	40.00
3	10600.00	60.5 PK	74.0	-13.5	1.09 H	176	40.90	19.60
4	10600.00	47.8 AV	54.0	-6.2	1.09 H	176	28.20	19.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	119.5 PK			1.13 V	14	79.50	40.00
2	*5300.00	109.8 AV			1.13 V	14	69.80	40.00
3	10600.00	61.2 PK	74.0	-12.8	1.04 V	103	41.60	19.60
4	10600.00	47.6 AV	54.0	-6.4	1.04 V	103	28.00	19.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	117.3 PK			1.00 H	27	77.30	40.00
2	*5320.00	107.6 AV			1.00 H	27	67.60	40.00
3	5350.00	70.3 PK	74.0	-3.7	1.00 H	328	63.90	6.40
4	5350.00	50.2 AV	54.0	-3.8	1.00 H	328	43.80	6.40
5	10640.00	60.4 PK	74.0	-13.6	1.04 H	180	40.90	19.50
6	10640.00	47.0 AV	54.0	-7.0	1.04 H	180	27.50	19.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	119.7 PK			1.02 V	18	79.70	40.00
2	*5320.00	109.4 AV			1.02 V	18	69.40	40.00
3	5350.00	68.5 PK	74.0	-5.5	1.14 V	355	62.10	6.40
4	5350.00	51.5 AV	54.0	-2.5	1.14 V	355	45.10	6.40
5	10640.00	60.0 PK	74.0	-14.0	1.25 V	238	40.50	19.50
6	10640.00	46.9 AV	54.0	-7.1	1.25 V	238	27.40	19.50

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	1.20 H	55	55.60	6.30
2	5460.00	46.5 AV	54.0	-7.5	1.20 H	55	40.20	6.30
3	#5470.00	72.2 PK	74.0	-1.8	1.13 H	47	65.90	6.30
4	#5470.00	47.9 AV	54.0	-6.1	1.13 H	47	41.60	6.30
5	*5500.00	117.3 PK			1.23 H	45	77.40	39.90
6	*5500.00	106.8 AV			1.23 H	45	66.90	39.90
7	11000.00	60.0 PK	74.0	-14.0	1.06 H	172	39.90	20.10
8	11000.00	48.0 AV	54.0	-6.0	1.06 H	172	27.90	20.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	1.00 V	23	55.60	6.30
2	5460.00	46.5 AV	54.0	-7.5	1.00 V	23	40.20	6.30
3	#5470.00	72.9 PK	74.0	-1.1	1.00 V	20	66.60	6.30
4	#5470.00	50.7 AV	54.0	-3.3	1.00 V	20	44.40	6.30
5	*5500.00	119.7 PK			1.00 V	7	79.80	39.90
6	*5500.00	109.6 AV			1.00 V	7	69.70	39.90
7	11000.00	59.6 PK	74.0	-14.4	1.09 V	7	39.50	20.10
8	11000.00	47.4 AV	54.0	-6.6	1.09 V	7	27.30	20.10

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	115.4 PK			1.03 H	30	75.40	40.00
2	*5580.00	105.5 AV			1.03 H	30	65.50	40.00
3	11160.00	61.2 PK	74.0	-12.8	1.38 H	287	41.50	19.70
4	11160.00	48.5 AV	54.0	-5.5	1.38 H	287	28.80	19.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	118.4 PK			1.00 V	20	78.40	40.00
2	*5580.00	108.5 AV			1.00 V	20	68.50	40.00
3	11160.00	62.5 PK	74.0	-11.5	1.01 V	323	42.80	19.70
4	11160.00	49.1 AV	54.0	-4.9	1.01 V	323	29.40	19.70

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	112.0 PK			1.00 H	34	71.80	40.20
2	*5700.00	102.5 AV			1.00 H	34	62.30	40.20
3	#5725.00	70.8 PK	74.0	-3.2	1.24 H	318	64.10	6.70
4	#5725.00	48.0 AV	54.0	-6.0	1.24 H	318	41.30	6.70
5	11400.00	61.8 PK	74.0	-12.2	1.08 H	339	43.20	18.60
6	11400.00	48.9 AV	54.0	-5.1	1.08 H	339	30.30	18.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	115.4 PK			1.24 V	41	75.20	40.20
2	*5700.00	105.2 AV			1.24 V	41	65.00	40.20
3	#5725.00	72.7 PK	74.0	-1.3	1.35 V	315	66.00	6.70
4	#5725.00	49.5 AV	54.0	-4.5	1.35 V	315	42.80	6.70
5	11400.00	61.3 PK	74.0	-12.7	1.41 V	32	42.70	18.60
6	11400.00	48.9 AV	54.0	-5.1	1.41 V	32	30.30	18.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	1.20 H	51	51.50	6.40
2	5150.00	46.1 AV	54.0	-7.9	1.20 H	51	39.70	6.40
3	*5260.00	118.3 PK			1.00 H	27	78.30	40.00
4	*5260.00	108.7 AV			1.00 H	27	68.70	40.00
5	#10520.00	60.6 PK	74.0	-13.4	1.15 H	294	41.30	19.30
6	#10520.00	47.3 AV	54.0	-6.7	1.15 H	294	28.00	19.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.00 V	313	52.10	6.40
2	5150.00	47.5 AV	54.0	-6.5	1.00 V	313	41.10	6.40
3	*5260.00	121.2 PK			1.01 V	21	81.20	40.00
4	*5260.00	110.5 AV			1.01 V	21	70.50	40.00
5	#10520.00	59.8 PK	74.0	-14.2	1.00 V	103	40.50	19.30
6	#10520.00	46.9 AV	54.0	-7.1	1.00 V	103	27.60	19.30

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	118.4 PK			1.16 H	40	78.40	40.00
2	*5300.00	108.1 AV			1.16 H	40	68.10	40.00
3	10600.00	61.0 PK	74.0	-13.0	1.08 H	111	41.40	19.60
4	10600.00	48.0 AV	54.0	-6.0	1.08 H	111	28.40	19.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	120.3 PK			1.25 V	14	80.30	40.00
2	*5300.00	110.0 AV			1.25 V	14	70.00	40.00
3	10600.00	60.7 PK	74.0	-13.3	1.14 V	90	41.10	19.60
4	10600.00	47.7 AV	54.0	-6.3	1.14 V	90	28.10	19.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	117.3 PK			1.19 H	32	77.30	40.00
2	*5320.00	106.9 AV			1.19 H	32	66.90	40.00
3	5350.00	72.2 PK	74.0	-1.8	1.00 H	321	65.80	6.40
4	5350.00	50.8 AV	54.0	-3.2	1.00 H	321	44.40	6.40
5	10640.00	60.1 PK	74.0	-13.9	1.11 H	254	40.60	19.50
6	10640.00	47.5 AV	54.0	-6.5	1.11 H	254	28.00	19.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	119.8 PK			1.25 V	11	79.80	40.00
2	*5320.00	109.6 AV			1.25 V	11	69.60	40.00
3	5350.00	72.8 PK	74.0	-1.2	1.00 V	354	66.40	6.40
4	5350.00	51.1 AV	54.0	-2.9	1.00 V	354	44.70	6.40
5	10640.00	60.3 PK	74.0	-13.7	1.09 V	42	40.80	19.50
6	10640.00	46.9 AV	54.0	-7.1	1.09 V	42	27.40	19.50

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.2 PK	74.0	-12.8	1.00 H	330	54.90	6.30
2	5460.00	45.5 AV	54.0	-8.5	1.00 H	330	39.20	6.30
3	#5470.00	68.4 PK	74.0	-5.6	1.00 H	330	62.10	6.30
4	#5470.00	47.1 AV	54.0	-6.9	1.00 H	330	40.80	6.30
5	*5500.00	114.9 PK			1.20 H	49	75.00	39.90
6	*5500.00	105.4 AV			1.20 H	49	65.50	39.90
7	11000.00	60.4 PK	74.0	-13.6	1.05 H	254	40.30	20.10
8	11000.00	48.1 AV	54.0	-5.9	1.05 H	254	28.00	20.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	63.1 PK	74.0	-10.9	1.00 V	23	56.80	6.30
2	5460.00	47.1 AV	54.0	-6.9	1.00 V	23	40.80	6.30
3	#5470.00	72.9 PK	74.0	-1.1	1.00 V	19	66.60	6.30
4	#5470.00	49.9 AV	54.0	-4.1	1.00 V	19	43.60	6.30
5	*5500.00	118.6 PK			1.00 V	9	78.70	39.90
6	*5500.00	109.2 AV			1.00 V	9	69.30	39.90
7	11000.00	61.1 PK	74.0	-12.9	1.00 V	225	41.00	20.10
8	11000.00	48.1 AV	54.0	-5.9	1.00 V	225	28.00	20.10

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	116.6 PK			1.29 H	292	76.60	40.00
2	*5580.00	106.4 AV			1.29 H	292	66.40	40.00
3	11160.00	60.0 PK	74.0	-14.0	1.08 H	87	40.30	19.70
4	11160.00	48.1 AV	54.0	-5.9	1.08 H	87	28.40	19.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	119.4 PK			1.09 V	10	79.40	40.00
2	*5580.00	109.0 AV			1.09 V	10	69.00	40.00
3	11160.00	60.6 PK	74.0	-13.4	1.05 V	77	40.90	19.70
4	11160.00	47.6 AV	54.0	-6.4	1.05 V	77	27.90	19.70

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	114.0 PK			1.35 H	323	73.80	40.20
2	*5700.00	103.3 AV			1.35 H	323	63.10	40.20
3	#5725.00	73.0 PK	74.0	-1.0	1.50 H	291	66.30	6.70
4	#5725.00	39.2 AV	54.0	-14.8	1.50 H	291	32.50	6.70
5	11400.00	62.9 PK	74.0	-11.1	1.08 H	339	44.30	18.60
6	11400.00	50.0 AV	54.0	-4.0	1.08 H	339	31.40	18.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	115.2 PK			1.00 V	45	75.00	40.20
2	*5700.00	104.8 AV			1.00 V	45	64.60	40.20
3	#5725.00	72.2 PK	74.0	-1.8	1.33 V	43	65.50	6.70
4	#5725.00	48.6 AV	54.0	-5.4	1.33 V	43	41.90	6.70
5	11400.00	62.2 PK	74.0	-11.8	1.00 V	318	43.60	18.60
6	11400.00	49.0 AV	54.0	-5.0	1.00 V	318	30.40	18.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.52 H	3	51.70	6.40
2	5150.00	46.0 AV	54.0	-8.0	1.52 H	3	39.60	6.40
3	*5270.00	114.1 PK			1.41 H	28	74.10	40.00
4	*5270.00	104.4 AV			1.41 H	28	64.40	40.00
5	#10540.00	60.0 PK	74.0	-14.0	1.05 H	301	40.70	19.30
6	#10540.00	47.8 AV	54.0	-6.2	1.05 H	301	28.50	19.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.15 V	327	53.10	6.40
2	5150.00	47.1 AV	54.0	-6.9	1.15 V	327	40.70	6.40
3	*5270.00	116.2 PK			1.36 V	30	76.20	40.00
4	*5270.00	106.9 AV			1.36 V	30	66.90	40.00
5	#10540.00	60.1 PK	74.0	-13.9	1.26 V	76	40.80	19.30
6	#10540.00	47.3 AV	54.0	-6.7	1.26 V	76	28.00	19.30

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	113.4 PK			1.00 H	25	73.40	40.00
2	*5310.00	103.1 AV			1.00 H	25	63.10	40.00
3	5350.00	72.5 PK	74.0	-1.5	1.00 H	326	66.10	6.40
4	5350.00	51.1 AV	54.0	-2.9	1.00 H	326	44.70	6.40
5	10620.00	60.7 PK	74.0	-13.3	1.18 H	284	41.20	19.50
6	10620.00	48.2 AV	54.0	-5.8	1.18 H	284	28.70	19.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	114.3 PK			1.24 V	22	74.30	40.00
2	*5310.00	104.5 AV			1.24 V	22	64.50	40.00
3	5350.00	73.0 PK	74.0	-1.0	1.24 V	29	66.60	6.40
4	5350.00	52.5 AV	54.0	-1.5	1.24 V	29	46.10	6.40
5	10620.00	60.5 PK	74.0	-13.5	1.06 V	45	41.00	19.50
6	10620.00	48.2 AV	54.0	-5.8	1.06 V	45	28.70	19.50

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	1.00 H	320	53.70	6.30
2	5460.00	45.1 AV	54.0	-8.9	1.00 H	320	38.80	6.30
3	#5470.00	70.2 PK	74.0	-3.8	1.00 H	326	63.90	6.30
4	#5470.00	52.2 AV	54.0	-1.8	1.00 H	326	45.90	6.30
5	*5510.00	108.6 PK			1.00 H	44	68.70	39.90
6	*5510.00	98.8 AV			1.00 H	44	58.90	39.90
7	11020.00	60.4 PK	74.0	-13.6	1.00 H	294	40.40	20.00
8	11020.00	47.7 AV	54.0	-6.3	1.00 H	294	27.70	20.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	1.02 V	21	52.50	6.30
2	5460.00	45.0 AV	54.0	-9.0	1.02 V	21	38.70	6.30
3	#5470.00	71.6 PK	74.0	-2.4	1.00 V	18	65.30	6.30
4	#5470.00	53.0 AV	54.0	-1.0	1.00 V	18	46.70	6.30
5	*5510.00	112.7 PK			1.00 V	18	72.80	39.90
6	*5510.00	103.0 AV			1.00 V	18	63.10	39.90
7	11020.00	60.4 PK	74.0	-13.6	1.09 V	124	40.40	20.00
8	11020.00	47.2 AV	54.0	-6.8	1.09 V	124	27.20	20.00

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	113.2 PK			1.13 H	45	73.20	40.00
2	*5550.00	103.1 AV			1.13 H	45	63.10	40.00
3	11100.00	60.2 PK	74.0	-13.8	1.04 H	89	40.60	19.60
4	11100.00	47.5 AV	54.0	-6.5	1.04 H	89	27.90	19.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	115.5 PK			1.00 V	13	75.50	40.00
2	*5550.00	105.7 AV			1.00 V	13	65.70	40.00
3	11100.00	59.8 PK	74.0	-14.2	1.06 V	273	40.20	19.60
4	11100.00	47.4 AV	54.0	-6.6	1.06 V	273	27.80	19.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	110.4 PK			1.00 H	38	70.30	40.10
2	*5670.00	99.9 AV			1.00 H	38	59.80	40.10
3	#5725.00	67.2 PK	74.0	-6.8	1.31 H	20	60.50	6.70
4	#5725.00	47.5 AV	54.0	-6.5	1.31 H	20	40.80	6.70
5	11340.00	60.2 PK	74.0	-13.8	1.03 H	1	40.90	19.30
6	11340.00	48.5 AV	54.0	-5.5	1.03 H	1	29.20	19.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	112.2 PK			1.08 V	13	72.10	40.10
2	*5670.00	102.9 AV			1.08 V	13	62.80	40.10
3	#5725.00	70.5 PK	74.0	-3.5	1.33 V	45	63.80	6.70
4	#5725.00	50.2 AV	54.0	-3.8	1.33 V	45	43.50	6.70
5	11340.00	61.7 PK	74.0	-12.3	1.01 V	240	42.40	19.30
6	11340.00	46.5 AV	54.0	-7.5	1.01 V	240	27.20	19.30

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5290.00	104.8 PK			1.28 H	30	64.80	40.00
2	*5290.00	95.5 AV			1.28 H	30	55.50	40.00
3	5350.00	65.3 PK	74.0	-8.7	1.14 H	36	58.90	6.40
4	5350.00	49.6 AV	54.0	-4.4	1.14 H	36	43.20	6.40
5	#10580.00	60.8 PK	74.0	-13.2	1.12 H	322	41.20	19.60
6	#10580.00	48.2 AV	54.0	-5.8	1.12 H	322	28.60	19.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5290.00	106.2 PK			1.23 V	36	66.20	40.00
2	*5290.00	96.9 AV			1.23 V	36	56.90	40.00
3	5350.00	66.9 PK	74.0	-7.1	1.36 V	26	60.50	6.40
4	5350.00	52.7 AV	54.0	-1.3	1.36 V	26	46.30	6.40
5	#10580.00	60.7 PK	74.0	-13.3	1.14 V	52	41.10	19.60
6	#10580.00	48.3 AV	54.0	-5.7	1.14 V	52	28.70	19.60

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	64.3 PK	74.0	-9.7	1.20 H	36	58.00	6.30
2	5460.00	51.3 AV	54.0	-2.7	1.20 H	36	45.00	6.30
3	#5470.00	65.8 PK	74.0	-8.2	1.22 H	41	59.50	6.30
4	#5470.00	50.2 AV	54.0	-3.8	1.22 H	41	43.90	6.30
5	*5530.00	104.4 PK			1.11 H	37	64.50	39.90
6	*5530.00	95.2 AV			1.11 H	37	55.30	39.90
7	11060.00	59.8 PK	74.0	-14.2	1.04 H	79	40.00	19.80
8	11060.00	46.8 AV	54.0	-7.2	1.04 H	79	27.00	19.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	64.7 PK	74.0	-9.3	1.06 V	23	58.40	6.30
2	5460.00	50.5 AV	54.0	-3.5	1.06 V	23	44.20	6.30
3	#5470.00	69.3 PK	74.0	-4.7	1.10 V	20	63.00	6.30
4	#5470.00	52.7 AV	54.0	-1.3	1.10 V	20	46.40	6.30
5	*5530.00	107.2 PK			1.00 V	20	67.30	39.90
6	*5530.00	98.1 AV			1.00 V	20	58.20	39.90
7	11060.00	59.6 PK	74.0	-14.4	1.11 V	302	39.80	19.80
8	11060.00	47.0 AV	54.0	-7.0	1.11 V	302	27.20	19.80

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz worst-case data

802.11a

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	32.6 QP	40.0	-7.4	1.99 H	314	47.20	-14.60
2	132.95	28.3 QP	43.5	-15.2	1.99 H	66	43.20	-14.90
3	249.60	28.7 QP	46.0	-17.3	1.00 H	215	42.90	-14.20
4	500.42	33.7 QP	46.0	-12.3	1.49 H	304	42.00	-8.30
5	720.12	35.0 QP	46.0	-11.0	1.00 H	189	39.00	-4.00
6	819.28	38.4 QP	46.0	-7.6	1.49 H	186	40.30	-1.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.32	32.3 QP	40.0	-7.7	1.00 V	207	46.90	-14.60
2	99.89	36.4 QP	43.5	-7.1	1.00 V	205	55.20	-18.80
3	374.04	27.5 QP	46.0	-18.5	1.00 V	336	38.20	-10.70
4	500.42	28.4 QP	46.0	-17.6	1.00 V	33	36.70	-8.30
5	624.85	34.2 QP	46.0	-11.8	1.49 V	163	39.70	-5.50
6	821.23	33.8 QP	46.0	-12.2	1.49 V	295	35.60	-1.80

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 13, 2014	Feb. 12, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

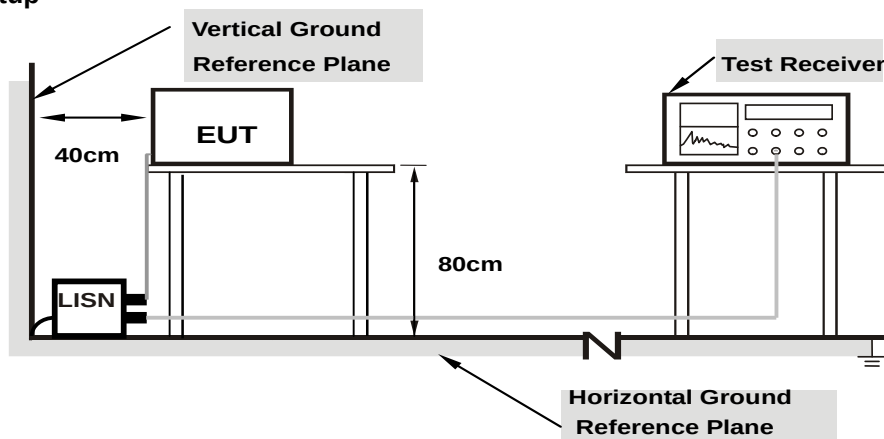

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


CONDUCTED WORST-CASE DATA: 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19016	0.07	58.98	46.98	59.05	47.05	64.03	54.03	-4.98	-6.98
2	0.25392	0.07	50.48	40.96	50.55	41.03	61.63	51.63	-11.08	-10.60
3	0.31797	0.08	52.68	42.40	52.76	42.48	59.76	49.76	-7.00	-7.28
4	0.36875	0.08	51.26	39.50	51.34	39.58	58.53	48.53	-7.19	-8.95
5	0.43906	0.08	47.72	36.42	47.80	36.50	57.08	47.08	-9.28	-10.58
6	0.52118	0.09	44.54	32.30	44.63	32.39	56.00	46.00	-11.37	-13.61
7	0.73984	0.10	46.64	32.90	46.74	33.00	56.00	46.00	-9.26	-13.00
8	0.98984	0.11	45.72	31.38	45.83	31.49	56.00	46.00	-10.17	-14.51
9	1.57422	0.13	43.76	28.84	43.89	28.97	56.00	46.00	-12.11	-17.03
10	13.30078	0.68	54.92	40.74	55.60	41.42	60.00	50.00	-4.40	-8.58
11	26.03125	1.22	49.36	45.30	50.58	46.52	60.00	50.00	-9.42	-3.48
12	28.55078	1.30	49.96	46.46	51.26	47.76	60.00	50.00	-8.74	-2.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

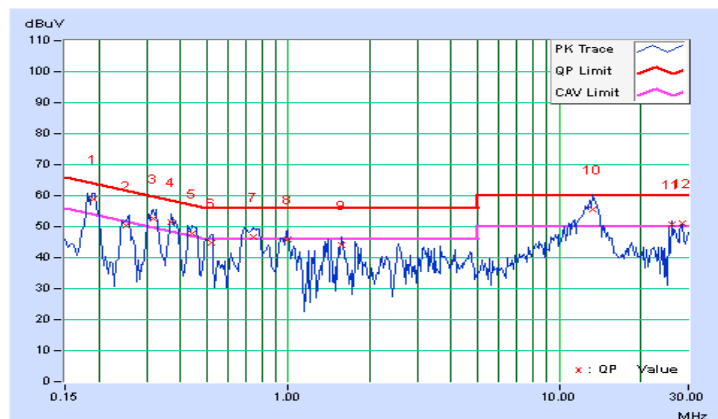


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18915	0.05	59.44	47.36	59.49	47.41	64.07	54.07	-4.58	-6.66
2	0.25539	0.06	51.10	40.92	51.16	40.98	61.58	51.58	-10.42	-10.60
3	0.32029	0.06	53.28	42.32	53.34	42.38	59.70	49.70	-6.36	-7.32
4	0.37266	0.07	50.94	40.80	51.01	40.87	58.44	48.44	-7.43	-7.57
5	0.43906	0.07	47.92	36.70	47.99	36.77	57.08	47.08	-9.09	-10.31
6	0.52109	0.07	44.48	32.26	44.55	32.33	56.00	46.00	-11.45	-13.67
7	0.70078	0.08	47.10	32.64	47.18	32.72	56.00	46.00	-8.82	-13.28
8	0.98984	0.09	45.84	31.88	45.93	31.97	56.00	46.00	-10.07	-14.03
9	1.22525	0.10	44.74	31.44	44.84	31.54	56.00	46.00	-11.16	-14.46
10	1.54297	0.12	43.92	30.90	44.04	31.02	56.00	46.00	-11.96	-14.98
11	12.94922	0.58	53.38	39.20	53.96	39.78	60.00	50.00	-6.04	-10.22
12	28.55047	1.10	49.62	45.84	50.72	46.94	60.00	50.00	-9.28	-3.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

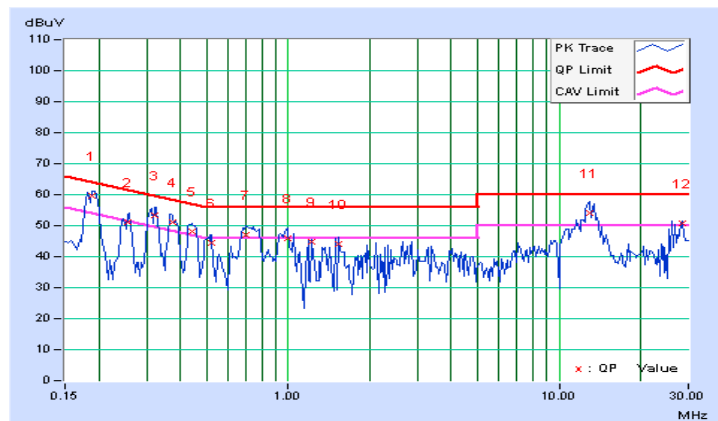

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	---	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	---	Fixed point-to-point Access Point	1 Watt (30 dBm)
	---	Indoor Access Point	1 Watt (30 dBm)
	---	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	$\sqrt{}$		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	$\sqrt{}$		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	---		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

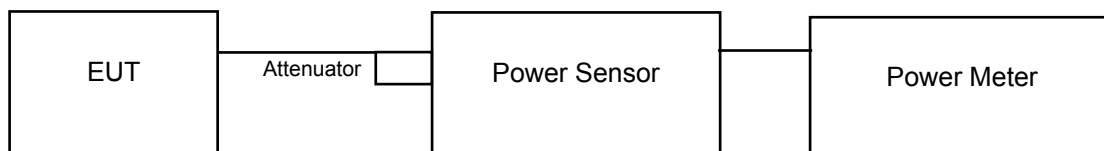

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

FOR AVERAGE POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW $\geq$ 3 MHz
- 5) Number of points in sweep $\geq$ 2 Span / RBW.
- 6) Sweep time $\leq$ (number of points in sweep) * T
- 7) Detector = RMS.
- 8) Trace mode = max hold.
- 9) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

FOR OCCUPIED BANDWIDTH

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 kHz RBW and 1MHz VBW. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

802.11a

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
52	5260	14.32	13.92	14.34	78.864	18.97	23.96	Pass
60	5300	14.43	14.17	14.18	80.037	19.03	23.96	Pass
64	5320	14.46	14.30	14.14	80.782	19.07	23.96	Pass
100	5500	14.01	13.87	14.20	75.858	18.80	23.87	Pass
116	5580	13.99	13.59	13.61	70.878	18.51	23.87	Pass
140	5700	13.80	13.48	13.39	68.099	18.33	23.87	Pass

For U-NII-2A: Max. gain=6.04>6dBi , so the power limit shall be reduced to 24-(6.04-6)=23.96dBm.

For U-NII-2C: Max. gain=6.13>6dBi , so the power limit shall be reduced to 24-(6.13-6)=23.87dBm.

NOTE:

CHAIN 0

1. 11dBm + 10log(21.96) = 24.42 dBm > 23.96dBm.
2. 11dBm + 10log(22.46) = 24.51 dBm > 23.96dBm.
3. 11dBm + 10log(22.56) = 24.53 dBm > 23.96dBm.
4. 11dBm + 10log(22.33) = 24.49 dBm > 23.87dBm.
5. 11dBm + 10log(23.23) = 24.66 dBm > 23.87dBm.
6. 11dBm + 10log(22.39) = 24.50 dBm > 23.87dBm.

CHAIN 1

1. 11dBm + 10log(21.62) = 24.35 dBm > 23.96dBm.
2. 11dBm + 10log(21.89) = 24.40 dBm > 23.96dBm.
3. 11dBm + 10log(21.94) = 24.41 dBm > 23.96dBm.
4. 11dBm + 10log(22.41) = 24.50 dBm > 23.87dBm.
5. 11dBm + 10log(22.10) = 24.44 dBm > 23.87dBm.
6. 11dBm + 10log(22.74) = 24.57 dBm > 23.87dBm.

CHAIN 2

1. 11dBm + 10log(21.40) = 24.30 dBm > 23.96dBm.
2. 11dBm + 10log(22.25) = 24.47 dBm > 23.96dBm.
3. 11dBm + 10log(21.52) = 24.33 dBm > 23.96dBm.
4. 11dBm + 10log(22.51) = 24.52 dBm > 23.87dBm.
5. 11dBm + 10log(22.01) = 24.43 dBm > 23.87dBm.
6. 11dBm + 10log(22.35) = 24.49 dBm > 23.87dBm.

802.11n (20MHz)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
52	5260	15.72	15.67	15.31	108.186	20.34	23.96	Pass
60	5300	15.77	15.90	15.65	113.390	20.55	23.96	Pass
64	5320	15.36	15.86	15.53	108.631	20.36	23.96	Pass
100	5500	15.38	15.26	15.57	104.146	20.18	23.87	Pass
116	5580	15.28	15.21	15.02	98.687	19.94	23.87	Pass
140	5700	15.49	15.36	15.22	103.022	20.13	23.87	Pass

For U-NII-2A: Max. gain=6.04>6dBi , so the power limit shall be reduced to 24-(6.04-6)=23.96dBm.

For U-NII-2C: Max. gain=6.13>6dBi , so the power limit shall be reduced to 24-(6.13-6)=23.87dBm.

NOTE:

CHAIN 0

1. 11dBm + 10log(22.88) = 24.59 dBm > 23.96dBm.
2. 11dBm + 10log(23.26) = 24.67 dBm > 23.96dBm.
3. 11dBm + 10log(23.04) = 24.62 dBm > 23.96dBm.
4. 11dBm + 10log(23.19) = 24.65 dBm > 23.87dBm.
5. 11dBm + 10log(23.23) = 24.66 dBm > 23.87dBm.
6. 11dBm + 10log(23.66) = 24.74 dBm > 23.87dBm.

CHAIN 1

1. 11dBm + 10log(22.67) = 24.55 dBm > 23.96dBm.
2. 11dBm + 10log(22.88) = 24.59 dBm > 23.96dBm.
3. 11dBm + 10log(23.52) = 24.71 dBm > 23.96dBm.
4. 11dBm + 10log(23.40) = 24.69 dBm > 23.87dBm.
5. 11dBm + 10log(24.13) = 24.83 dBm > 23.87dBm.
6. 11dBm + 10log(24.65) = 24.92 dBm > 23.87dBm.

CHAIN 2

1. 11dBm + 10log(22.97) = 24.61 dBm > 23.96dBm.
2. 11dBm + 10log(22.99) = 24.62 dBm > 23.96dBm.
3. 11dBm + 10log(22.83) = 24.59 dBm > 23.96dBm.
4. 11dBm + 10log(22.99) = 24.62 dBm > 23.87dBm.
5. 11dBm + 10log(23.58) = 24.73 dBm > 23.87dBm.
6. 11dBm + 10log(23.44) = 24.70 dBm > 23.87dBm.

802.11n (40MHz)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
54	5270	17.57	17.92	17.86	180.186	22.56	23.96	Pass
62	5310	17.04	17.40	17.84	166.350	22.21	23.96	Pass
102	5510	15.61	14.92	16.07	107.896	20.33	23.87	Pass
110	5550	18.53	17.84	19.07	212.823	23.28	23.87	Pass
134	5670	18.61	18.38	17.63	199.419	23.00	23.87	Pass

For U-NII-2A: Max. gain=6.04>6dBi , so the power limit shall be reduced to 24-(6.04-6)=23.96dBm.

For U-NII-2C: Max. gain=6.13>6dBi , so the power limit shall be reduced to 24-(6.13-6)=23.87dBm.

NOTE:

CHAIN 0

1. 11dBm + 10log(45.59) = 27.59 dBm > 23.96dBm.
2. 11dBm + 10log(46.05) = 27.63 dBm > 23.96dBm.
3. 11dBm + 10log(45.93) = 27.62 dBm > 23.87dBm.
4. 11dBm + 10log(46.05) = 27.63 dBm > 23.87dBm.
5. 11dBm + 10log(47.07) = 27.73 dBm > 23.87dBm.

CHAIN 1

1. 11dBm + 10log(46.19) = 27.65 dBm > 23.96dBm.
2. 11dBm + 10log(46.63) = 27.69 dBm > 23.96dBm.
3. 11dBm + 10log(46.51) = 27.68 dBm > 23.87dBm.
4. 11dBm + 10log(45.78) = 27.61 dBm > 23.87dBm.
5. 11dBm + 10log(46.00) = 27.63 dBm > 23.87dBm.

CHAIN 2

1. 11dBm + 10log(45.39) = 27.57 dBm > 23.96dBm.
2. 11dBm + 10log(44.70) = 27.50 dBm > 23.96dBm.
3. 11dBm + 10log(45.30) = 27.56 dBm > 23.87dBm.
4. 11dBm + 10log(46.16) = 27.64 dBm > 23.87dBm.
5. 11dBm + 10log(45.69) = 27.60 dBm > 23.87dBm.

802.11ac (80MHz)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
58	5290	11.52	12.03	12.30	47.132	16.73	23.96	Pass
106	5530	13.08	12.38	13.67	60.903	17.85	23.87	Pass

For U-NII-2A: Max. gain=6.04>6dBi , so the power limit shall be reduced to 24-(6.04-6)=23.96dBm.

For U-NII-2C: Max. gain=6.13>6dBi , so the power limit shall be reduced to 24-(6.13-6)=23.87dBm.

NOTE:

CHAIN 0

1. 11dBm + 10log(87.93) = 30.44 dBm > 23.96dBm.
2. 11dBm + 10log(87.19) = 30.40 dBm > 23.87dBm.

CHAIN 1

1. 11dBm + 10log(87.33) = 30.41 dBm > 23.96dBm.
2. 11dBm + 10log(88.16) = 30.45 dBm > 23.87dBm.

CHAIN 2

1. 11dBm + 10log(87.28) = 30.41 dBm > 23.96dBm.
2. 11dBm + 10log(87.58) = 30.42 dBm > 23.87dBm.

26dB Bandwidth:

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
52	5260	21.96	21.62	21.40	Pass
60	5300	22.46	21.89	22.25	Pass
64	5320	22.56	21.94	21.52	Pass
100	5500	22.33	22.41	22.51	Pass
116	5580	23.23	22.10	22.01	Pass
140	5700	22.39	22.74	22.35	Pass

802.11n (20MHz)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
52	5260	22.88	22.67	22.97	Pass
60	5300	23.26	22.88	22.99	Pass
64	5320	23.04	23.52	22.83	Pass
100	5500	23.19	23.40	22.99	Pass
116	5580	23.23	24.13	23.58	Pass
140	5700	23.66	24.65	23.44	Pass

802.11n (40MHz)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
54	5270	45.59	46.19	45.39	Pass
62	5310	46.05	46.63	44.70	Pass
102	5510	45.93	46.51	45.30	Pass
110	5550	46.05	45.78	46.16	Pass
134	5670	47.07	46.00	45.69	Pass

802.11ac (80MHz)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
58	5290	87.93	87.33	87.28	Pass
106	5530	87.19	88.16	87.58	Pass

Spectrum Plot of Worst Value


802.11a

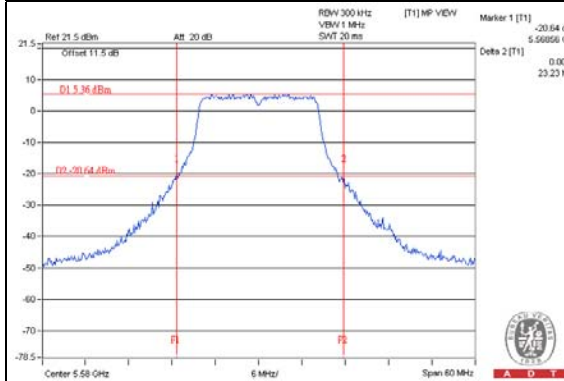


802.11n (20MHz)

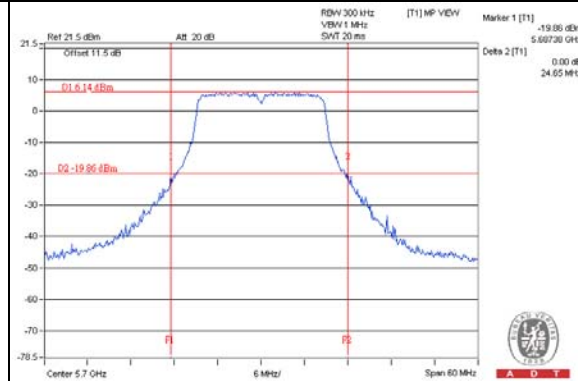

802.11n (40MHz)

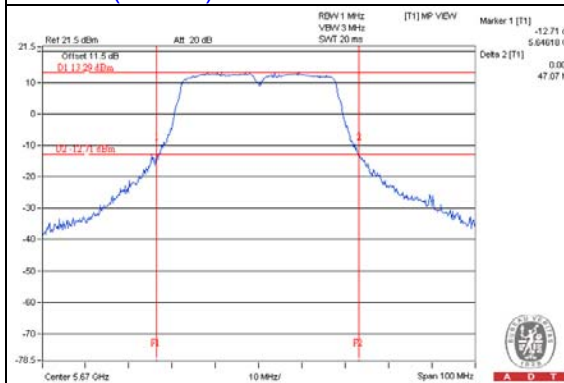

802.11ac (80MHz)

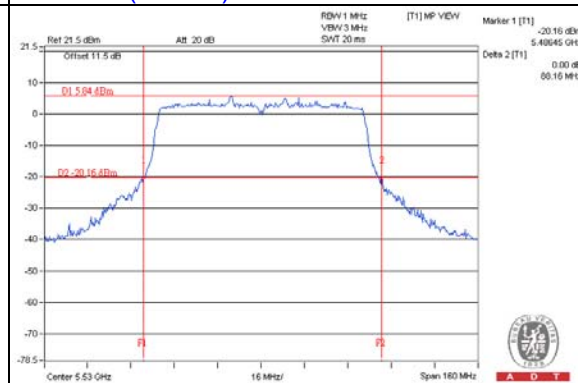

Occupied Bandwidth: 802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
52	5260	16.78	16.70	16.70	Pass
60	5300	16.78	16.78	16.70	Pass
64	5320	16.78	16.78	16.70	Pass
100	5500	16.78	16.68	16.68	Pass
116	5580	16.92	16.68	16.68	Pass
140	5700	16.92	16.68	16.68	Pass

802.11n (20MHz)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
52	5260	17.83	17.83	17.83	Pass
60	5300	18.00	17.91	17.83	Pass
64	5320	18.00	17.83	17.83	Pass
100	5500	18.00	17.91	17.88	Pass
116	5580	17.88	17.88	17.88	Pass
140	5700	18.00	17.88	17.88	Pass

802.11n (40MHz)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
54	5270	36.60	37.00	36.80	Pass
62	5310	36.80	36.80	36.80	Pass
102	5510	36.96	36.96	37.00	Pass
110	5550	36.80	37.00	36.80	Pass
134	5670	37.00	37.00	37.00	Pass


802.11ac (80MHz)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			Pass / Fail
		Chain 0	Chain 1	Chain 2	
58	5290	76.08	76.08	75.60	Pass
106	5530	76.08	76.32	76.08	Pass


Spectrum Plot of Worst Value

802.11a

802.11n (20MHz)

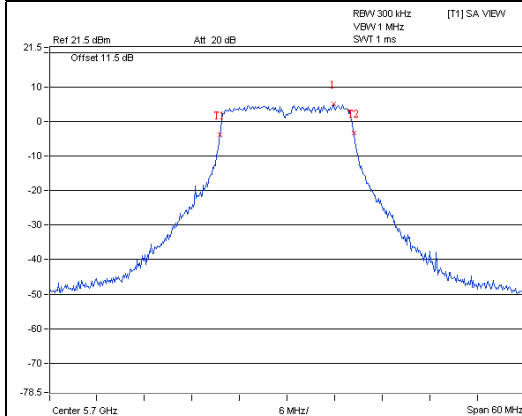


A D T

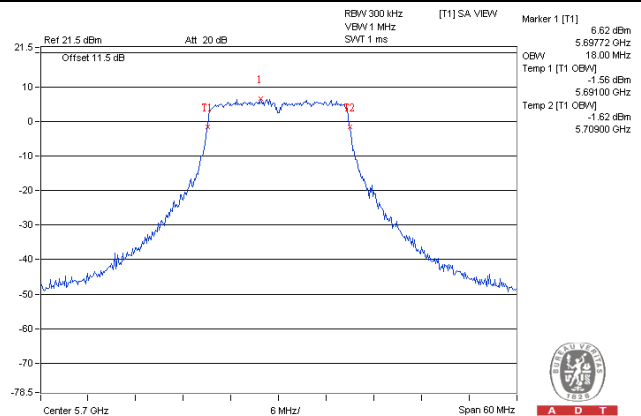


A D T

802.11n (40MHz)

802.11ac (80MHz)

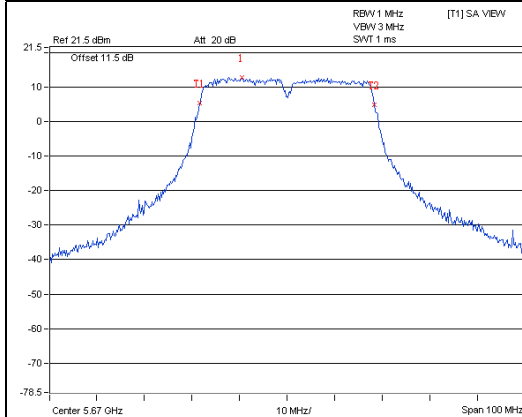

A D T

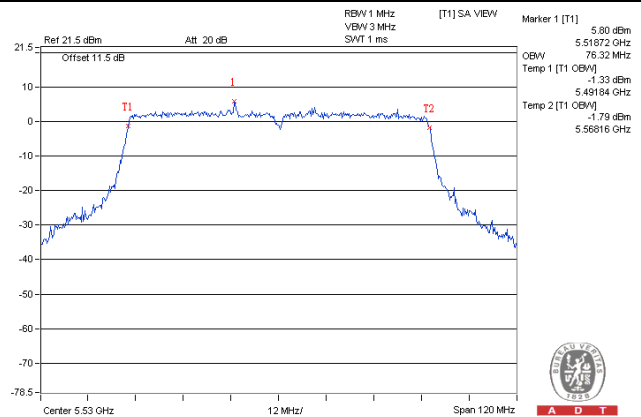

A D T

EUT MAXIMUM CONDUCTED POWER

802.11a

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	80.782	19.07
5470~5725	75.858	18.80

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (20MHz)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	113.390	20.55
5470~5725	104.146	20.18

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (40MHz)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	180.186	22.56
5470~5725	212.823	23.28

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11ac (80MHz)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	47.132	16.73
5470~5725	60.903	17.85

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	---	Outdoor Access Point	17dBm/ MHz
	---	Fixed point-to-point Access Point	
	---	Indoor Access Point	
	---	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	---		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11a

Channel	Frequency (MHz)	PSD (dBm)			Total PSD W/O Duty Factor (dBm)	Duty Factor	Total PSD With Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2					
52	5260	1.65	0.68	0.81	5.84	0.16	6.00	6.26	Pass
60	5300	1.42	0.46	0.51	5.59	0.16	5.75	6.26	Pass
64	5320	1.27	0.41	0.47	5.51	0.16	5.67	6.26	Pass
100	5500	1.13	1.29	1.23	5.99	0.16	6.15	6.36	Pass
116	5580	1.44	1.27	1.48	6.17	0.16	6.33	6.36	Pass
140	5700	1.39	1.31	1.40	6.14	0.16	6.30	6.36	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-2A Band:**
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2] = 10.74\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (10.74 - 6) = 6.26\text{dBm}$.
For U-NII-2C Band:
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2] = 10.64\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (10.64 - 6) = 6.36\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (20MHz)

Channel	Frequency (MHz)	PSD (dBm)			Total PSD W/O Duty Factor (dBm)	Duty Factor	Total PSD With Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2					
52	5260	2.51	1.21	-0.18	6.09	0.16	6.25	6.26	Pass
60	5300	2.09	0.91	-0.18	5.81	0.16	5.97	6.26	Pass
64	5320	1.80	1.01	0.04	5.78	0.16	5.94	6.26	Pass
100	5500	2.03	0.97	-0.07	5.84	0.16	6.00	6.36	Pass
116	5580	1.96	0.82	-0.27	5.71	0.16	5.87	6.36	Pass
140	5700	2.01	0.96	-0.37	5.75	0.16	5.91	6.36	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-2A Band:**
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.74dBi > 6dBi , so the power density limit shall be reduced to $11-(10.74-6) = 6.26\text{dBm}$.
For U-NII-2C Band:
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.64dBi > 6dBi , so the power density limit shall be reduced to $11-(10.64-6) = 6.36\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (40MHz)

Channel	Frequency (MHz)	PSD (dBm)			Total PSD W/O Duty Factor (dBm)	Duty Factor	Total PSD With Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2					
54	5270	1.08	-0.17	-0.09	5.08	0.32	5.40	6.26	Pass
62	5310	0.60	-0.38	-0.30	4.76	0.32	5.08	6.26	Pass
102	5510	-0.97	-2.07	-1.97	3.13	0.32	3.45	6.36	Pass
110	5550	0.84	-0.36	-0.18	4.90	0.32	5.22	6.36	Pass
134	5670	1.17	0.18	0.25	5.32	0.32	5.64	6.36	Pass

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-2A Band:**
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.74dBi > 6dBi , so the power density limit shall be reduced to $11-(10.74-6) = 6.26\text{dBm}$.
For U-NII-2C Band:
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.64dBi > 6dBi , so the power density limit shall be reduced to $11-(10.64-6) = 6.36\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (80MHz)


Channel	Frequency (MHz)	PSD (dBm)			Total PSD W/O Duty Factor (dBm)	Duty Factor	Total PSD With Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2					
58	5290	-8.07	-8.26	-8.07	-3.36	0.54	-2.82	6.26	Pass
106	5530	-5.89	-5.78	-6.71	-1.34	0.54	-0.80	6.36	Pass

NOTE:


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-2A Band:**
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.74dBi > 6dBi , so the power density limit shall be reduced to 11-(10.74-6) = 6.26dBm.
- For U-NII-2C Band:**
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2]$ = 10.64dBi > 6dBi , so the power density limit shall be reduced to 11-(10.64-6) = 6.36dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Ch 52 / Chain 0

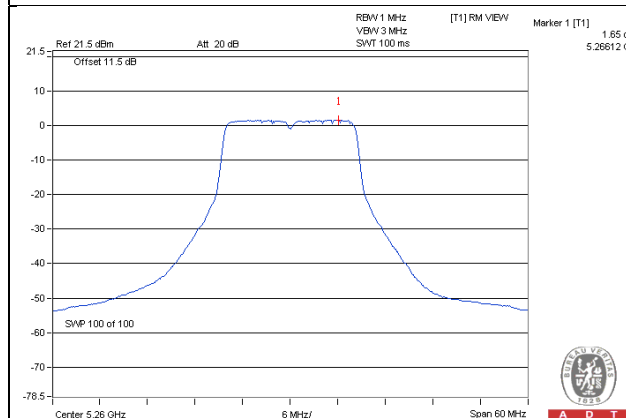


802.11n (20MHz) / Ch 52 / Chain 0

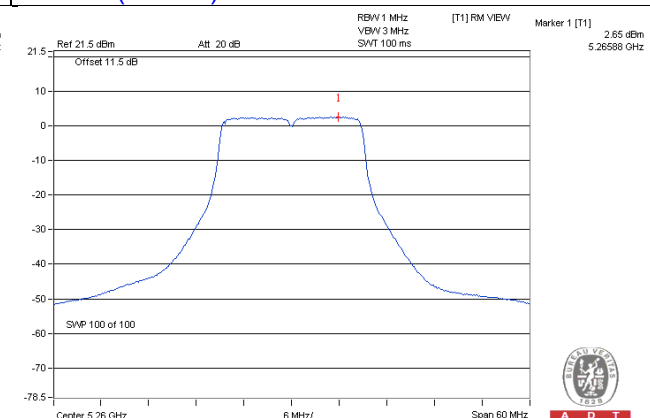

802.11n (40MHz) / Ch 134 / Chain 0

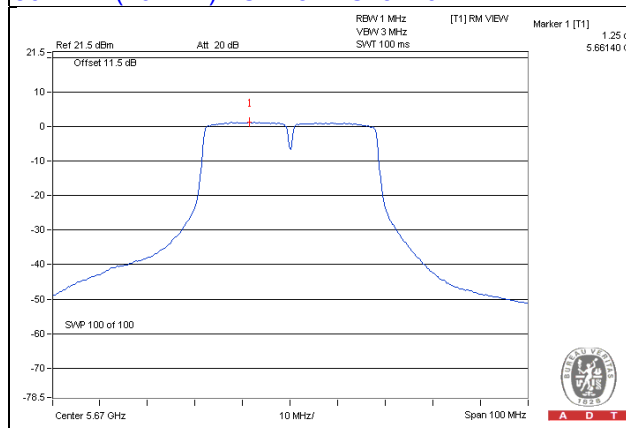

802.11ac (80MHz) / Ch 106 / Chain 1

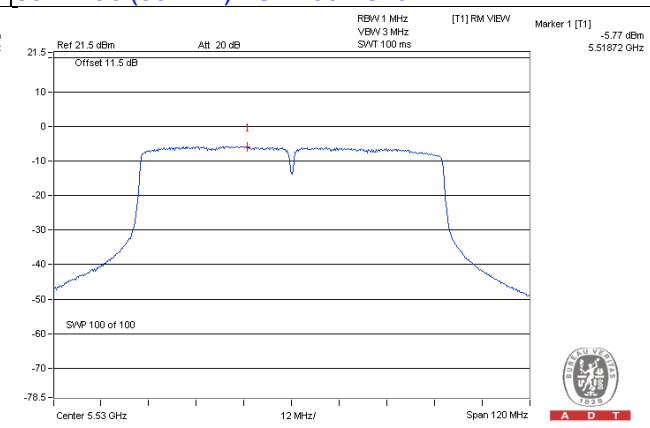


4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

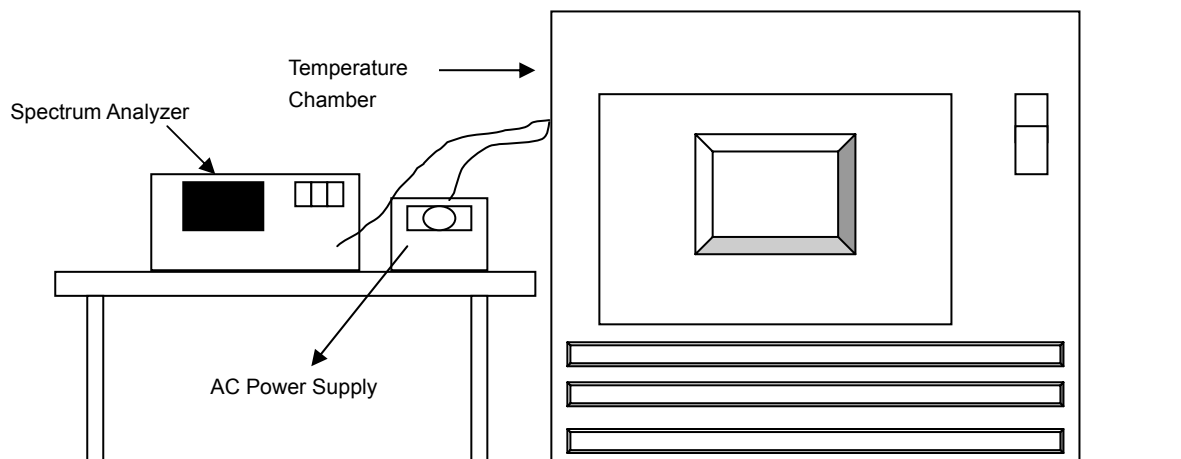

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5320MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
40	120	5320.0131	0.00025	5320.0139	0.00026	5320.0108	0.00020	5320.0146	0.00027
30	120	5320.0224	0.00042	5320.0188	0.00035	5320.0194	0.00036	5320.0209	0.00039
20	120	5319.9804	-0.00037	5319.9838	-0.00030	5319.9832	-0.00032	5319.9832	-0.00032
10	120	5319.9737	-0.00049	5319.9773	-0.00043	5319.9757	-0.00046	5319.9762	-0.00045
0	120	5320.0086	0.00016	5320.0078	0.00015	5320.0127	0.00024	5320.0104	0.00020

Frequency Stability Versus Temp.									
Operating Frequency: 5320MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5319.9810	-0.00036	5319.9833	-0.00031	5319.9835	-0.00031	5319.9836	-0.00031
	120	5319.9804	-0.00037	5319.9838	-0.00030	5319.9832	-0.00032	5319.9832	-0.00032
	102	5319.9795	-0.00039	5319.9833	-0.00031	5319.9831	-0.00032	5319.9834	-0.00031

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---