

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)


Platform information											
Brand		ODM		****End product model name		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)	
Dell		Compal		P152G		No		Regular NB		11.27mm	
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.											
Antenna information											
Vendor			Type			Antenna Part number (Main)			Antenna Part number (Aux)		
AWAN			PIFA			AYP6Y-200052 (DC33002QR0L)			AYP6Y-200052 (DC33002QR0L)		
Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz		
Main	2.79	1.20	1.35	2.65	2.81	N/A	N/A	N/A	N/A		
Aux	2.95	1.31	1.59	1.67	2.44	N/A	N/A	N/A	N/A		
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)	
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm	
	Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00		
	PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37		5.59
	Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49		5.34
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

1. Applicable test methods

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

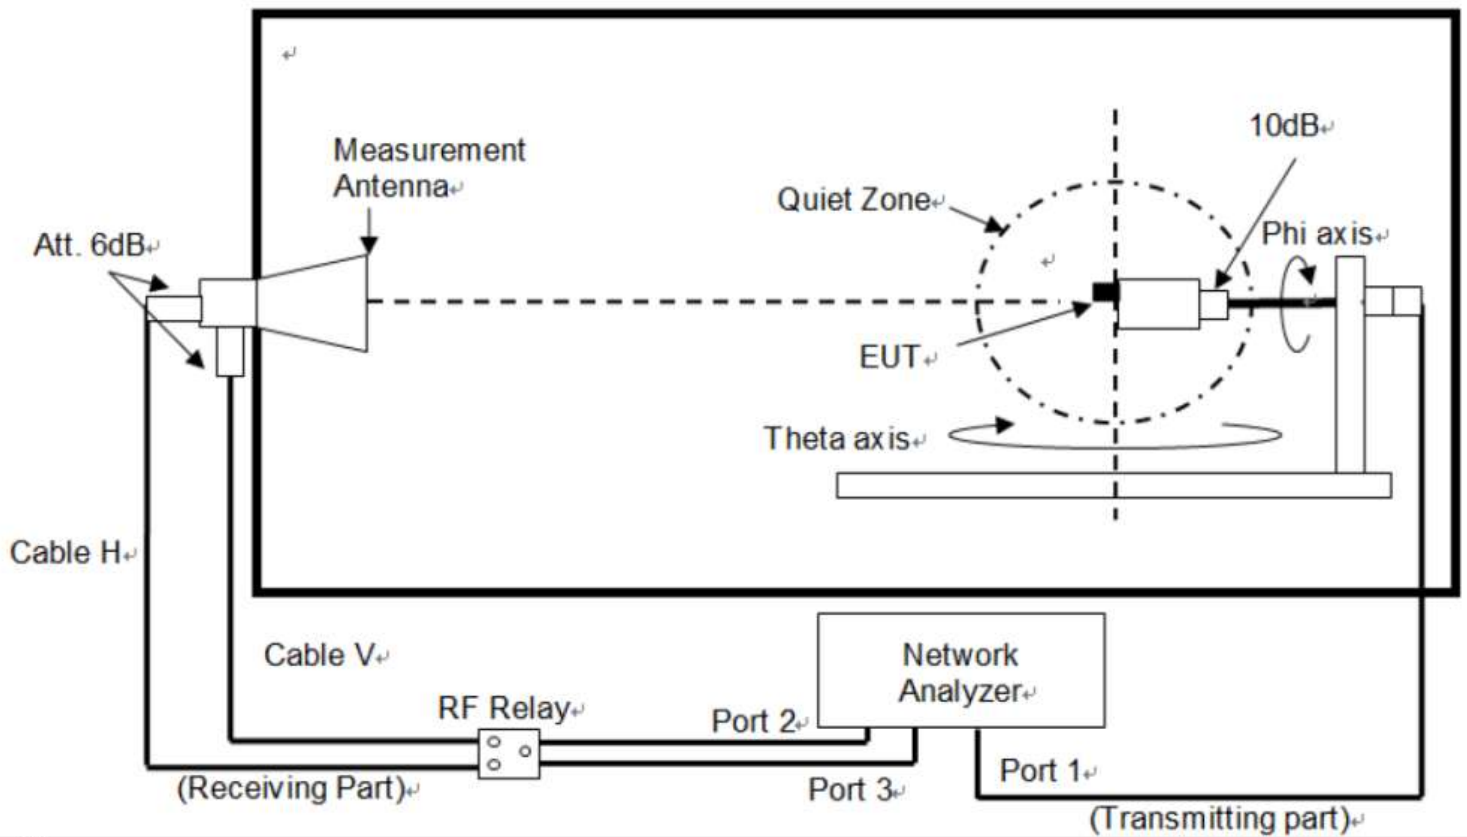

Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
(P/N: AYP6Y-200052) Main Antenna	AWAN	PIFA	1)Shen-Yu/KAIBO 2)50ohmCoaxial 3)length:430mm 4)diameter: 1.13mm 5)Connector P/N: I-pex:20565-001R-13 KangShuo:MHF-B13-N-01	2400-2483.5	2.79	4.12	2.0	1.33
				5150-5250	1.20	3.12	2.0	1.92
				5250-5350	1.35	3.34	2.0	1.99
				5470-5725	2.65	4.65	2.0	2.00
				5725-5850	2.81	4.87	2.0	2.06
				5925-6425	N/A	N/A	N/A	N/A
				6425-6525	N/A	N/A	N/A	N/A
				6525-6875	N/A	N/A	N/A	N/A
				6875-7125	N/A	N/A	N/A	N/A
(P/N: AYP6Y-200052) Aux Antenna	AWAN	PIFA	1)Shen-Yu/KAIBO 2)50ohmCoaxial 3)length:278mm 4)diameter: 1.13mm 5)Connector P/N: I-pex:20565-001R-13 KangShuo:MHF-B13-N-01	2400-2483.5	2.95	3.97	2.0	1.02
				5150-5250	1.31	2.82	2.0	1.51
				5250-5350	1.59	3.16	2.0	1.57
				5470-5725	1.67	3.25	2.0	1.58
				5725-5850	2.44	4.07	2.0	1.63
				5925-6425	N/A	N/A	N/A	N/A
				6425-6525	N/A	N/A	N/A	N/A
				6525-6875	N/A	N/A	N/A	N/A
				6875-7125	N/A	N/A	N/A	N/A

- 3D Antenna Peak Gain required being test in system basis.