

Annex A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/19

S01 System Check_H2450_220819

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0819 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.087$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2450 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.86 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.20 W/kg

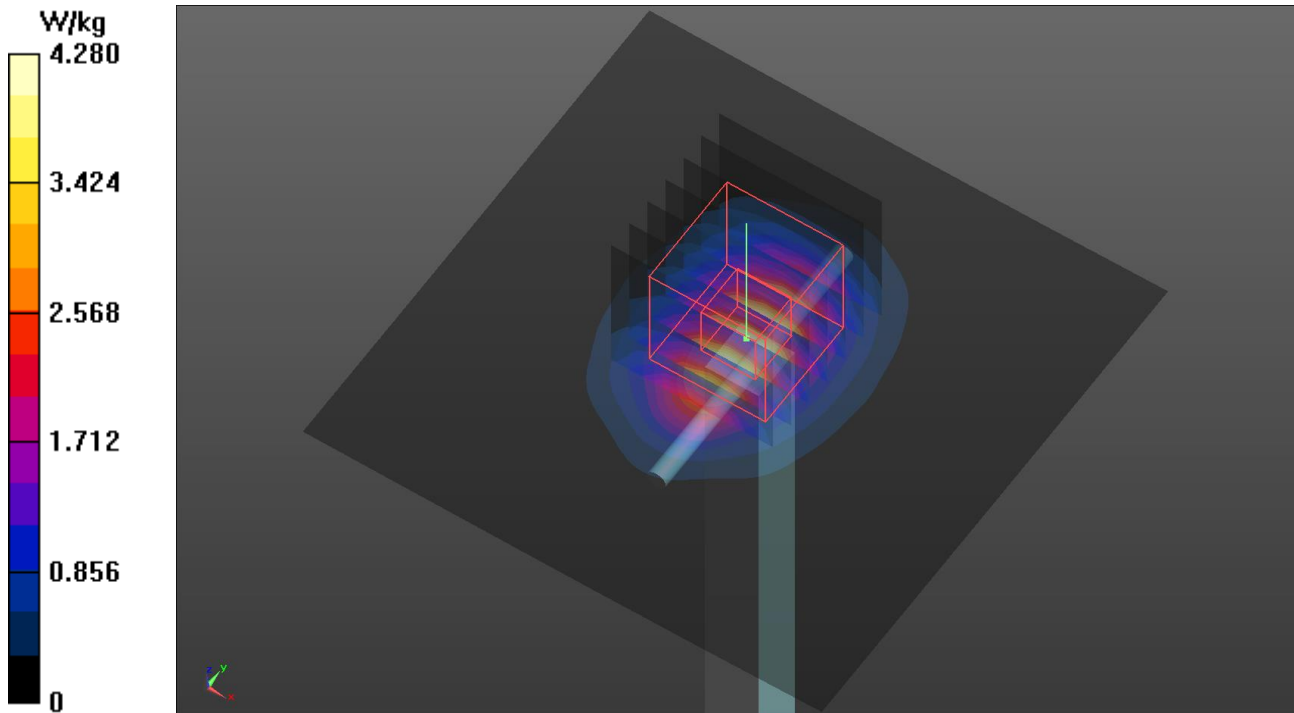

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/20

S02 System Check_H5250_220820

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0820 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.726$ S/m; $\epsilon_r = 35.505$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(5.74, 5.74, 5.74) @ 5250 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.23 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 48.86 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 4.05 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.2 W/kg

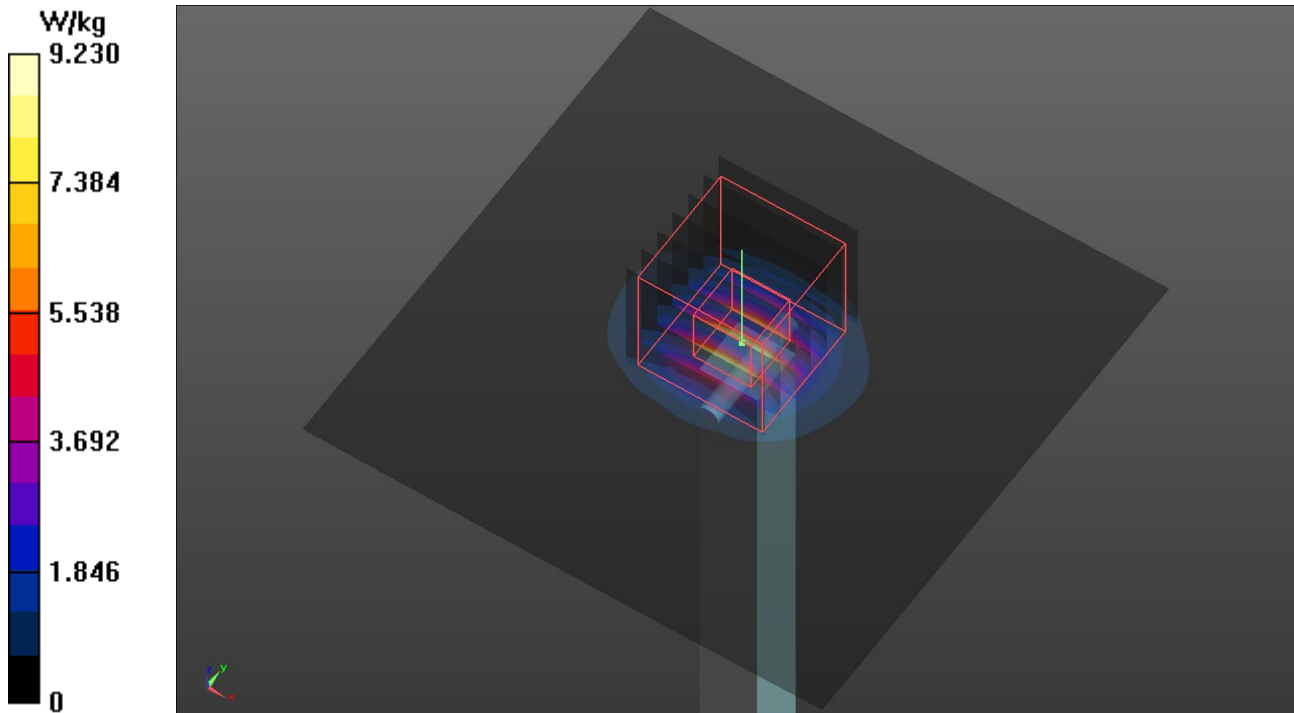

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/20

S03 System Check_H5600_220820

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0820 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.018$ S/m; $\epsilon_r = 35.009$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(4.93, 4.93, 4.93) @ 5600 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.0 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 48.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 4.08 W/kg; SAR(10 g) = 1.15 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.8 W/kg

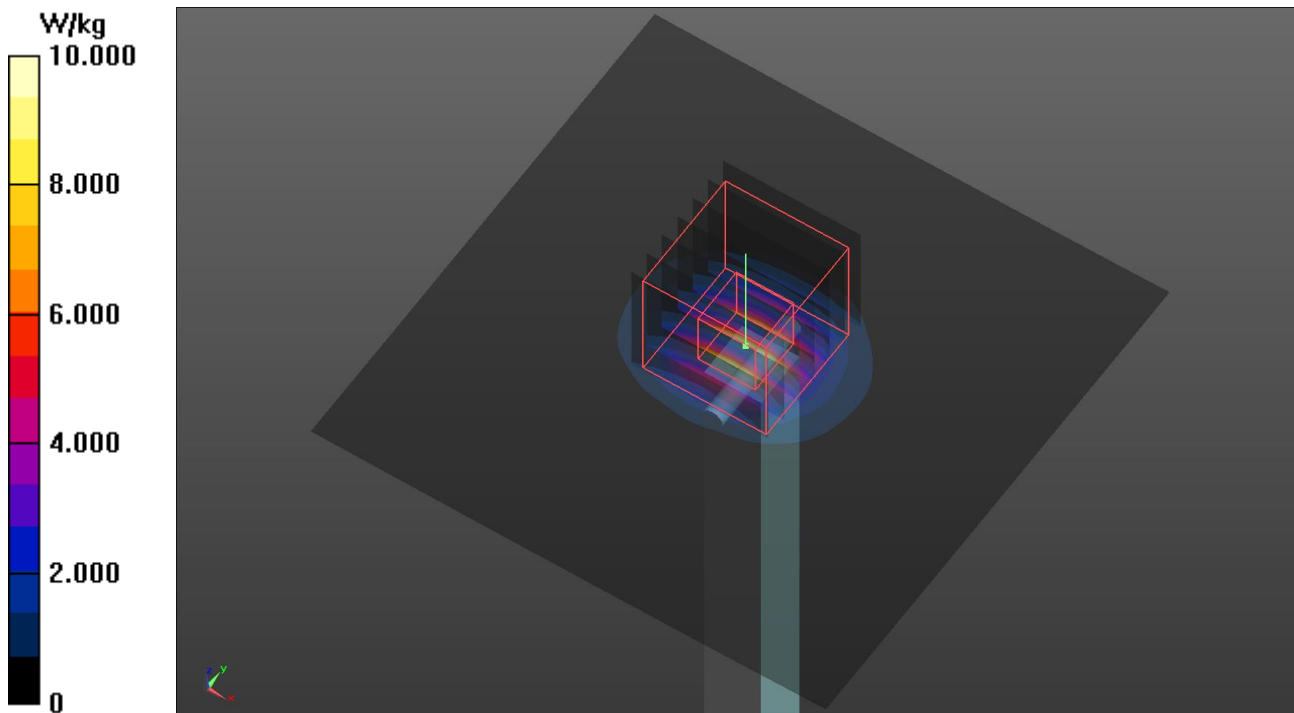

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/21

S04 System Check_H5750_220821

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0821 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 34.398$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.36 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.67 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.1 W/kg

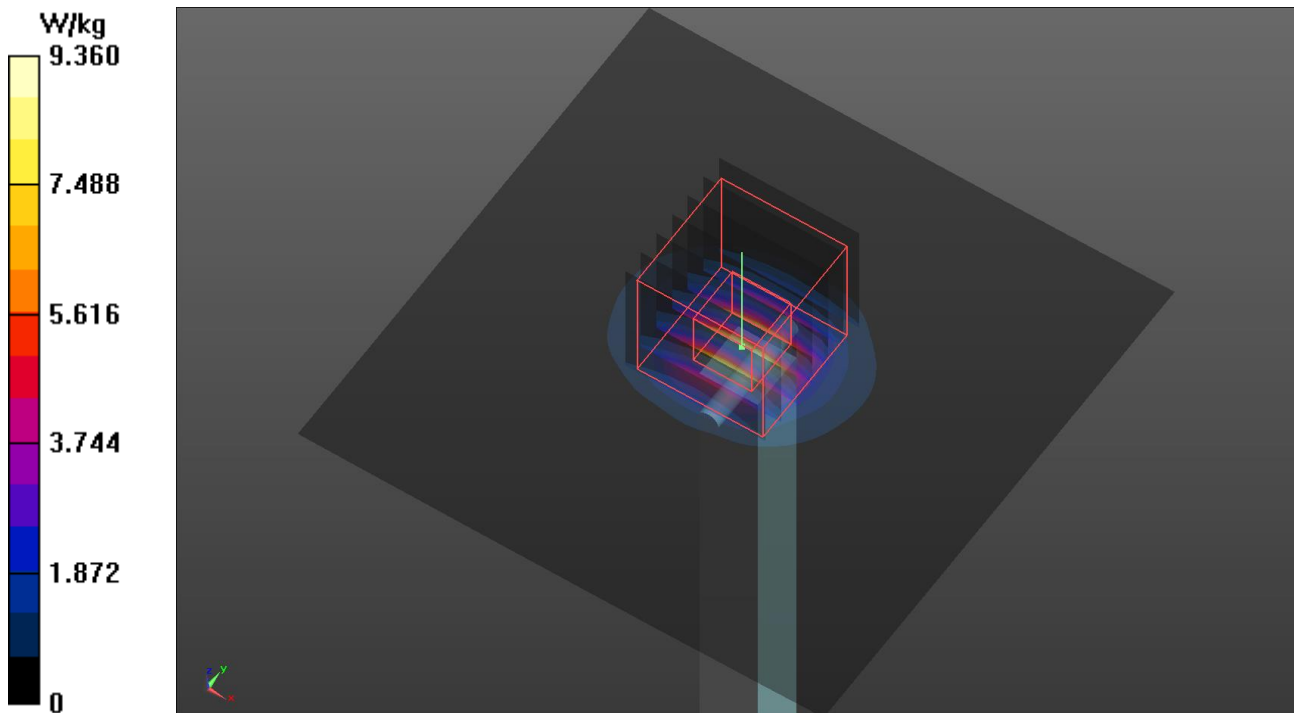

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/19

S05 System Check_H2450_220819

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0819 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.087$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2450 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.86 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.20 W/kg

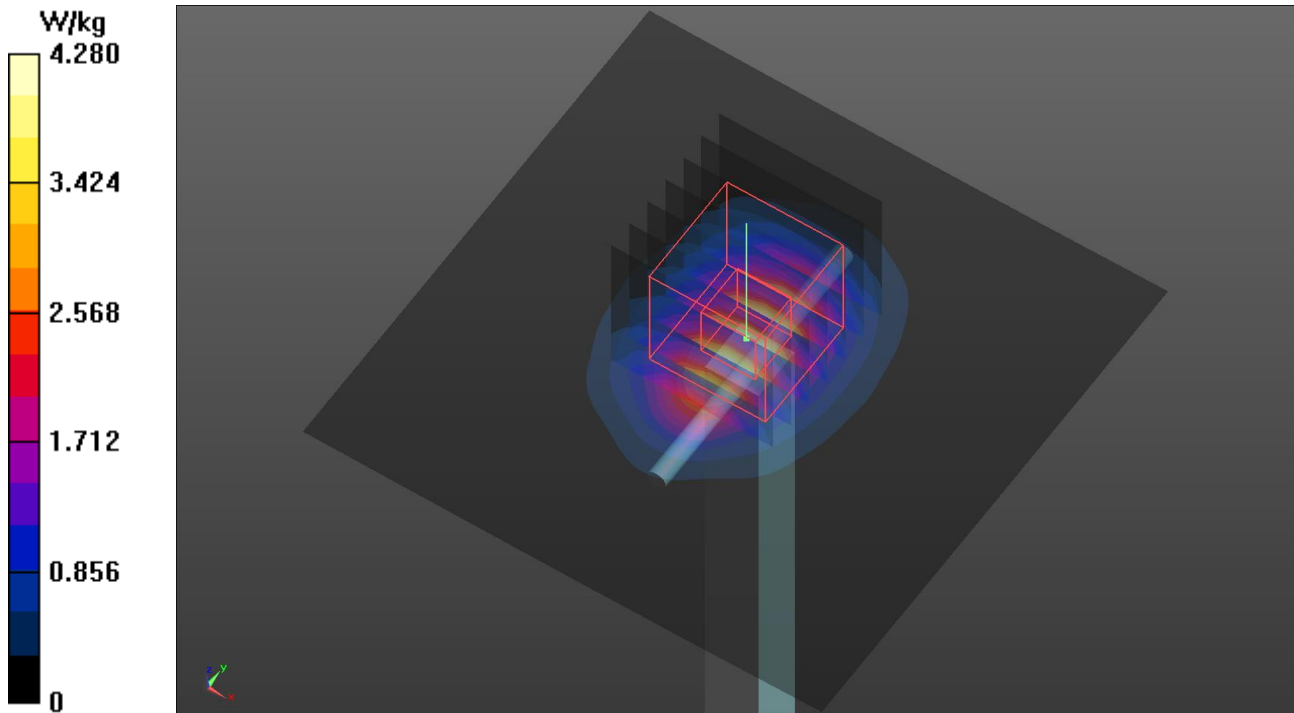

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/16

S06 System Check_H2450_20220816

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0816 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 37.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.82, 7.82, 7.82) @ 2450 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.99 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.71 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.00 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.11 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.05 W/kg

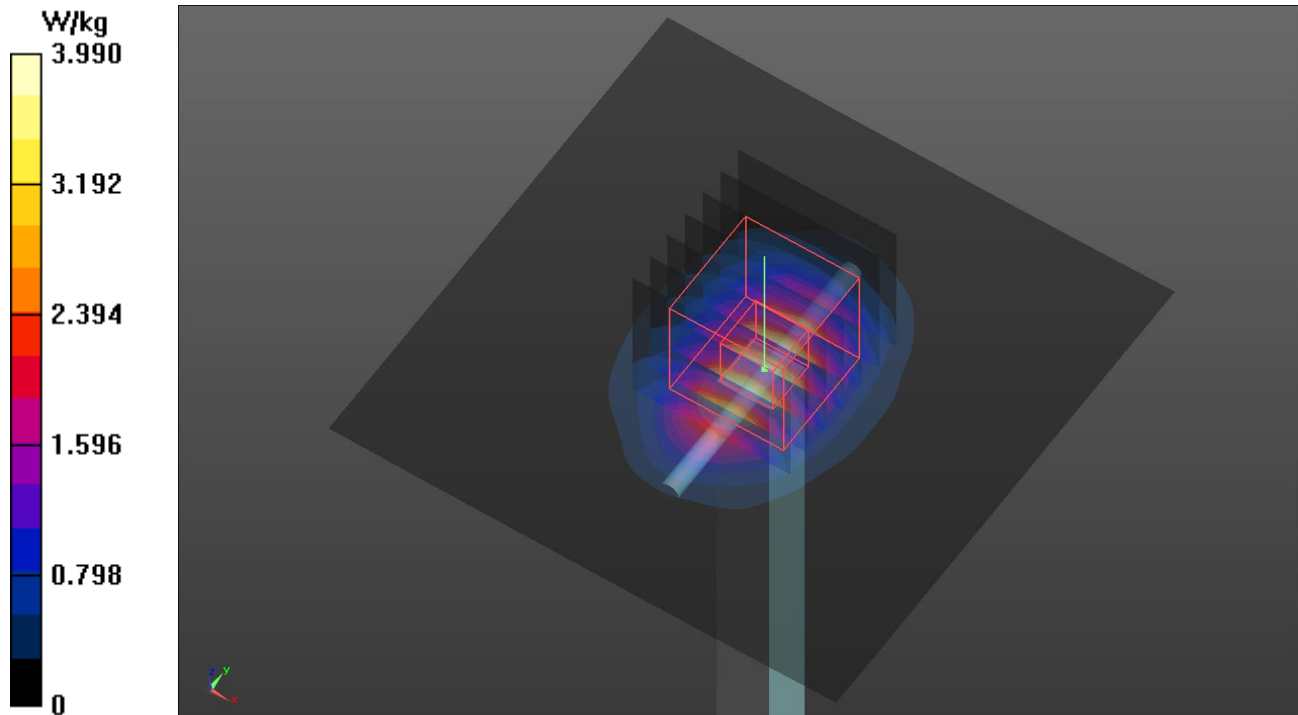

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/17

S07 System Check_H5250_220817

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0817 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.799$ S/m; $\epsilon_r = 35.398$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.28, 5.28, 5.28) @ 5250 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.47 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.12 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 4.07 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.3 W/kg

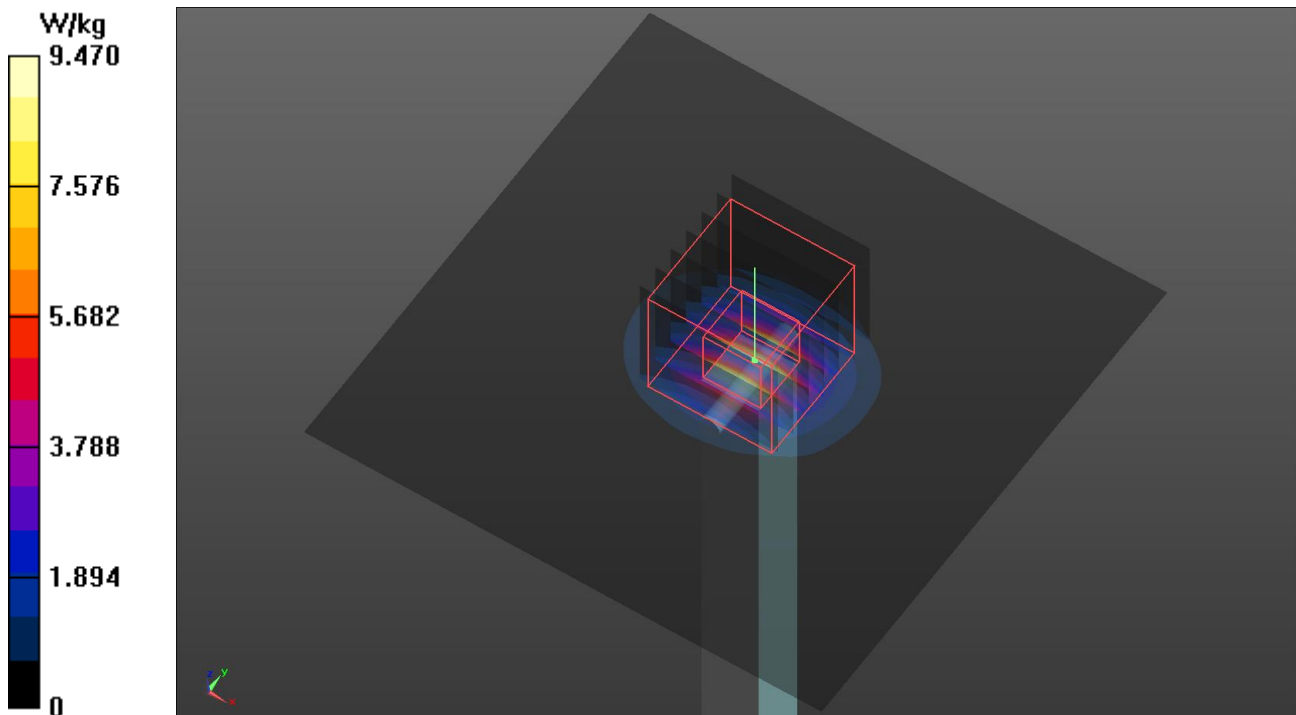

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/17

S08 System Check_H5600_220817

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0817 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.175$ S/m; $\epsilon_r = 34.802$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.78, 4.78, 4.78) @ 5600 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.6 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 49.87 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 4.33 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 11.1 W/kg

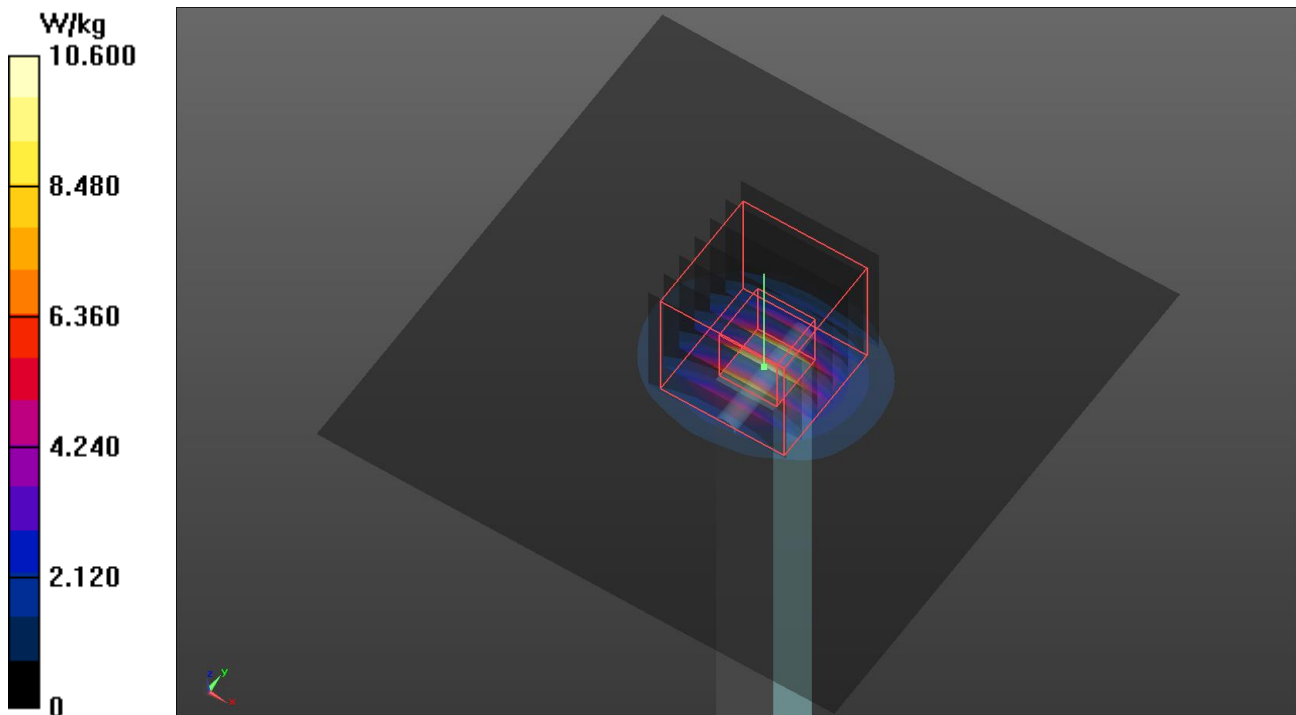

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/18

S09 System Check_H5750_220818

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0818 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.255$ S/m; $\epsilon_r = 35.49$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.06, 5.06, 5.06) @ 5750 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 9.24 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 46.02 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.05 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.84 W/kg

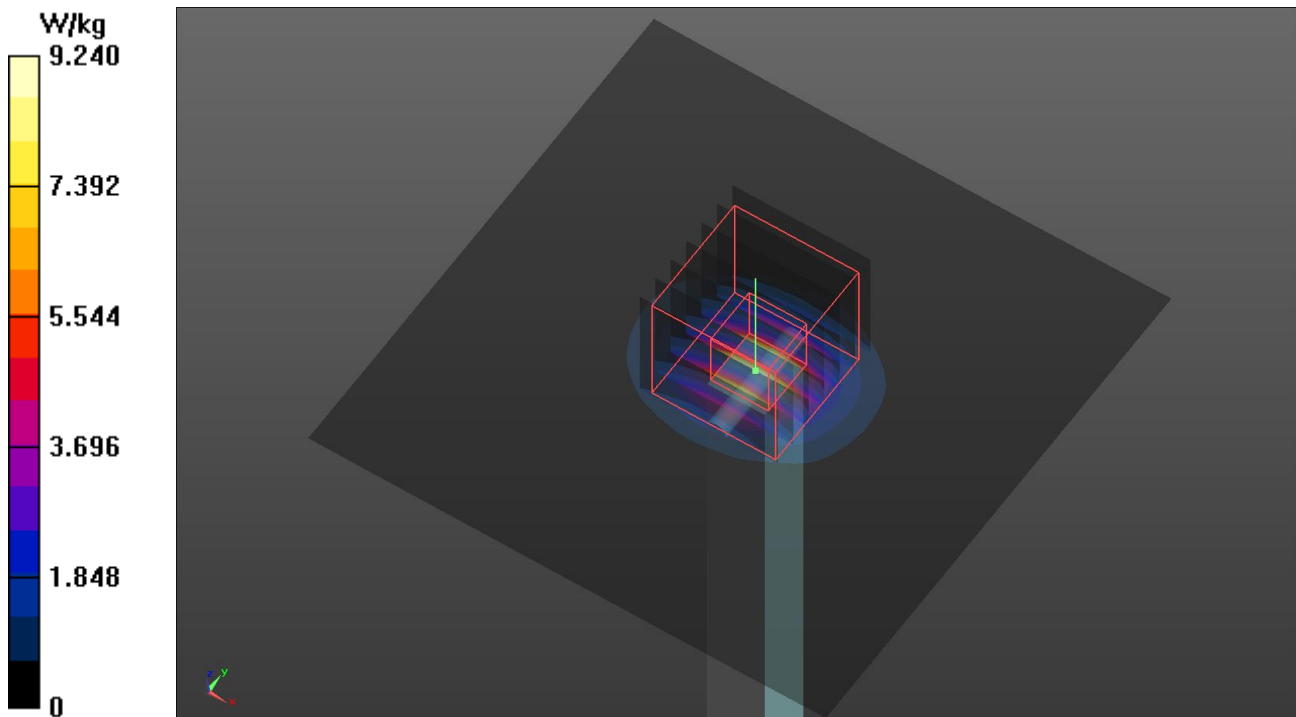

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/12

S12 System Check_H13_220812

DUT: Dipole 13 MHz; Type: CLA13; SN: 1018

Communication System: UID 0, CW; Frequency: 13 MHz; Duty Cycle: 1:1

Medium: H06_0812 Medium parameters used (interpolated): $f = 13$ MHz; $\sigma = 0.727$ S/m; $\epsilon_r = 55.95$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7720; ConvF(16.69, 16.69, 16.69) @ 13 MHz; Calibrated: 2022/03/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1698; Calibrated: 2021/11/09
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (241x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0218 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.200 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00822 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0201 W/kg

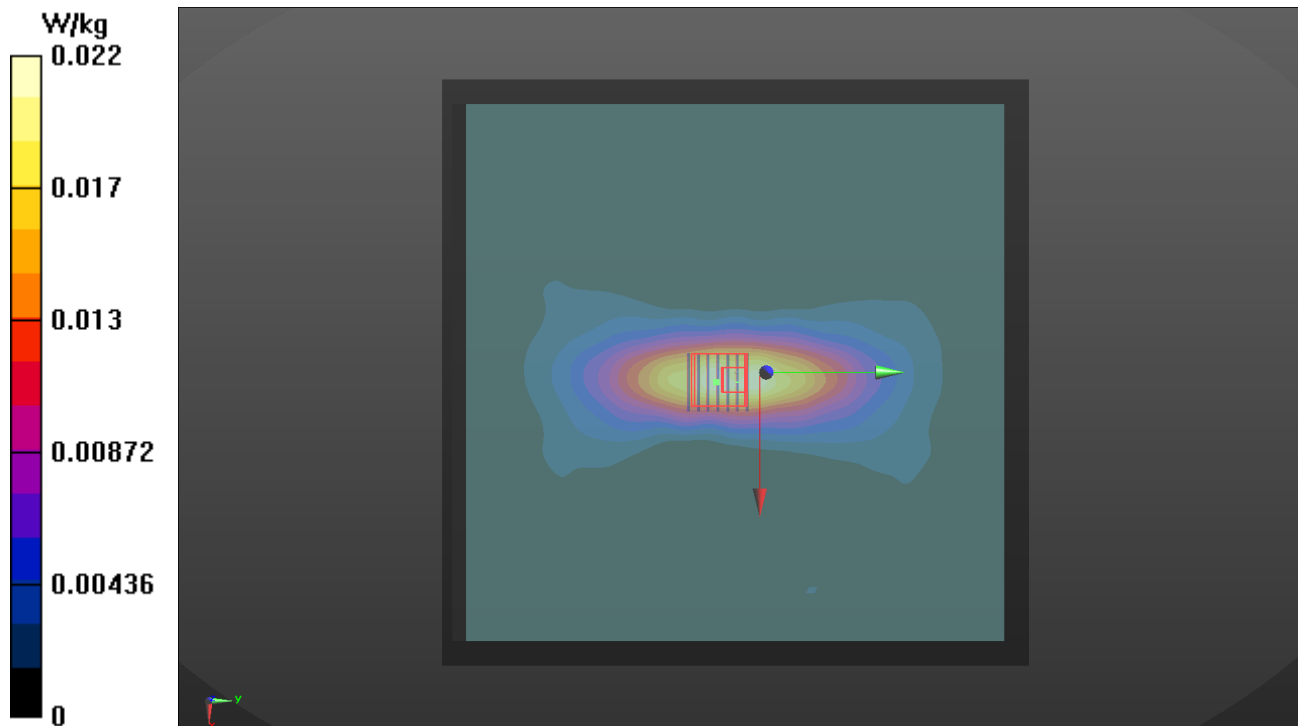

Plots of System Verification

Measurement Report S10 System Check_H6.5GHz_220822 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
H6.5GHz	50.0 x 10.0 x 8.0		6.5GHzV2 Validation Kit

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		,	6500.0,	5.45	6.19	33.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1, 2022-Aug-22	EX3DV4 - SN7537, 2022-04-27	DAE4 Sn1585, 2022-04-21

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-22	2022-08-22
psSAR1g [W/kg]	23.7	28.3
psSAR10g [W/kg]	4.97	5.27
psPDab (1.0cm2, sq)[W/m2]		295
psPDab (4.0cm2, sq)[W/m2]		132
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		51.9
Dist 3dB Peak [mm]		4.8

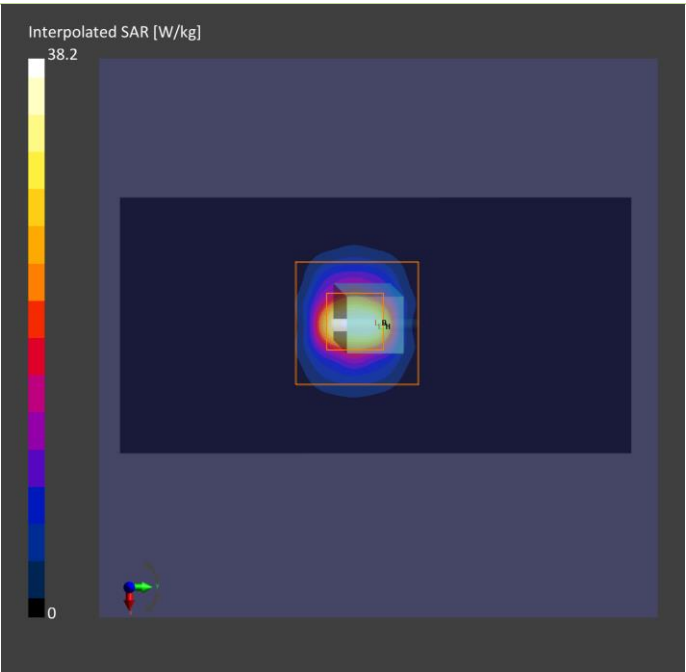

Plots of System Verification

Measurement Report S11 System Check_H6.5GHz_220822 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
H6.5GHz	50.0 x 10.0 x 8.0		6.5GHzV2 Validation Kit

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		,	6500.0,	5.45	6.19	33.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1, 2022-Aug-22	EX3DV4 - SN7537, 2022-04-27	DAE4 Sn1585, 2022-04-21

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-22	2022-08-22
psSAR1g [W/kg]	23.7	28.3
psSAR10g [W/kg]	4.97	5.27
psPDab (1.0cm2, sq)[W/m2]		295
psPDab (4.0cm2, sq)[W/m2]		132
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		51.9
Dist 3dB Peak [mm]		4.8

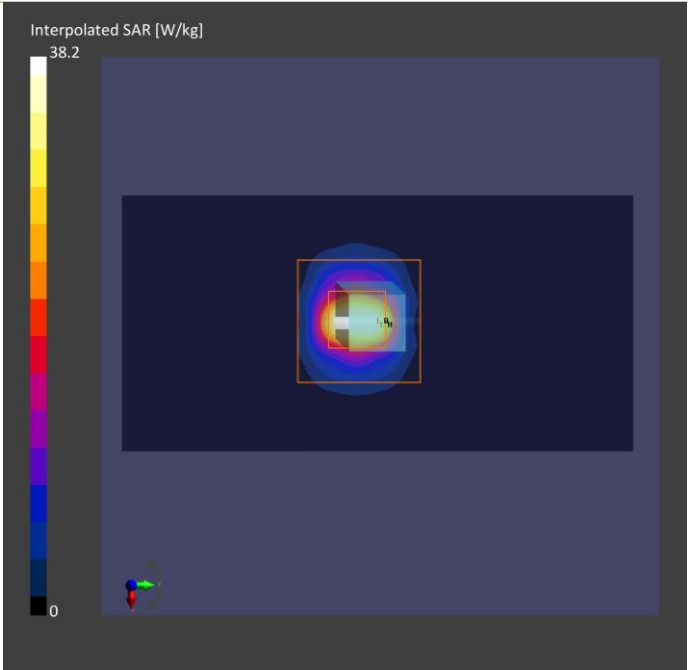

Plots of System Verification

Measurement Report S10 PD_System Check_10 GHz_2022.08.22 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave-	Air---	EUmmWV4 - SN9438_F1-55GHz, 2022-07-18	DAE4 Sn1431, 2022-02-23

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

	5G Scan
Date	2022-08-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	48.1
psPDtot+ [W/m ²]	48.4
psPDmod+ [W/m ²]	48.6
E _{max} [V/m]	141
Power Drift [dB]	-0.03

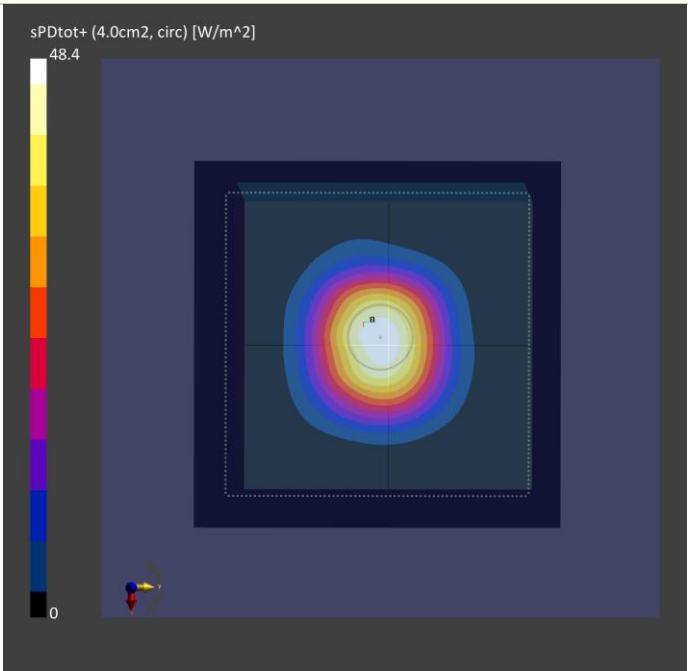

Plots of System Verification

Measurement Report

S11 PD_System Check_10 GHz_2022.08.22

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave-	Air---	EUmmWV4 - SN9438_F1-55GHz, 2022-07-18	DAE4 Sn1431, 2022-02-23

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

	5G Scan
Date	2022-08-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	48.1
psPDtot+ [W/m ²]	48.4
psPDmod+ [W/m ²]	48.6
E _{max} [V/m]	141
Power Drift [dB]	-0.03

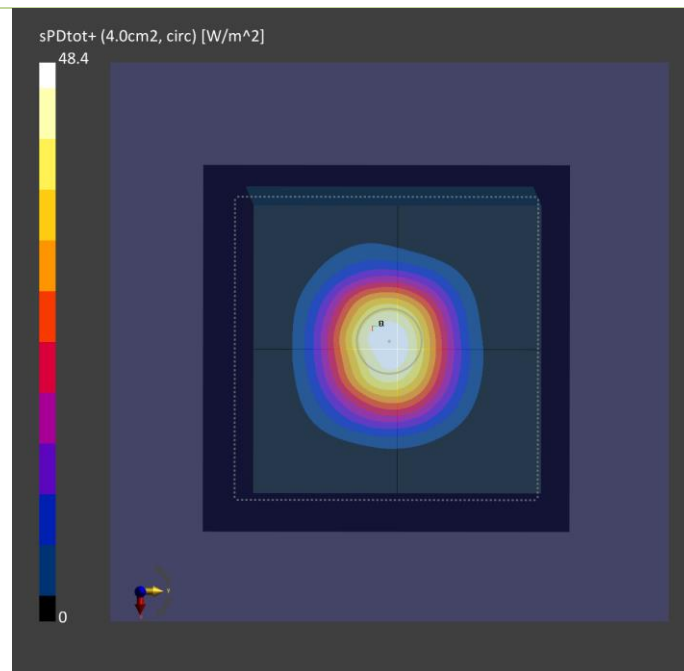

Annex B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/19

P01 WLAN2.4G_802.11b_Top Side_0mm_Ch6_Sample 1_Ant 0_P-Sensor w_o_Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0819 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.853$ S/m; $\epsilon_r = 39.129$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2437 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x301x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.875 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.07 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.444 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

Maximum value of SAR (measured) = 2.18 W/kg

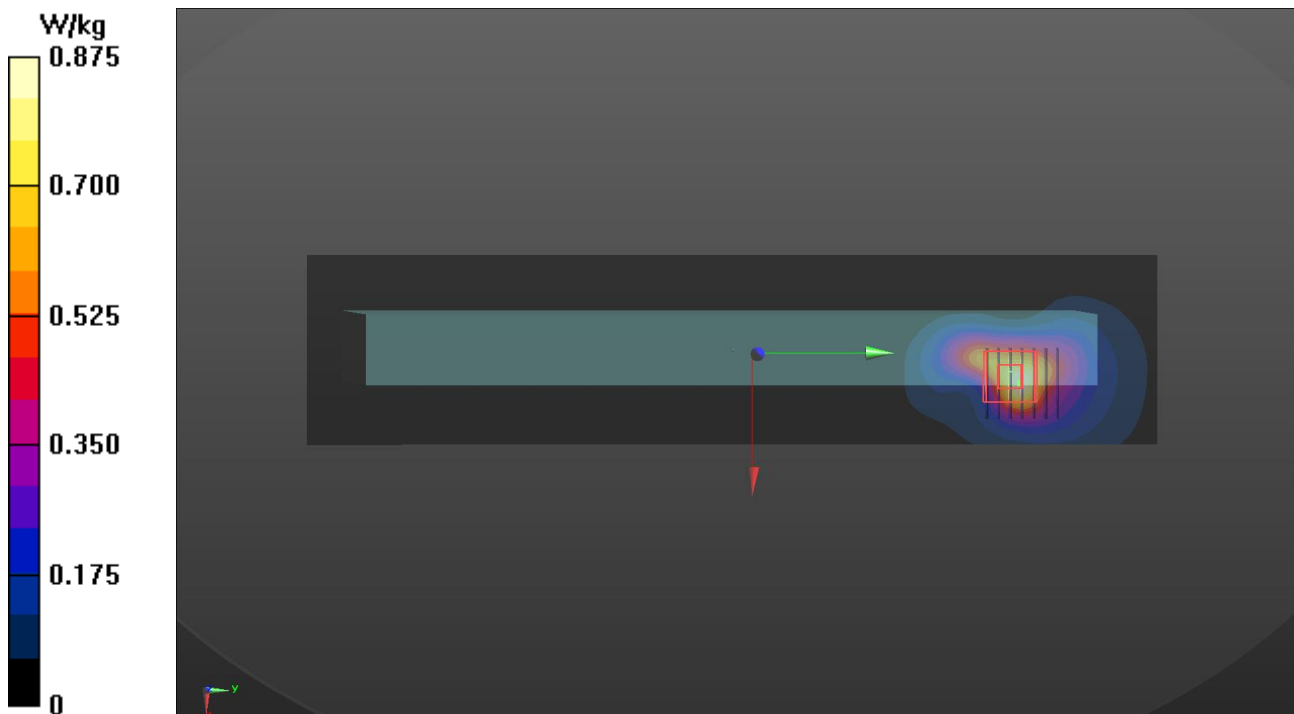

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/20

P02 WLAN5.3G_802.11n HT40_Top Side_0mm_Ch62_Sample 1_Ant 0_P-Sensor w_Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10599 - AAC, IEEE 802.11n (HT Mixed, 40MHz, MCS0); Frequency: 5310 MHz; Duty Cycle: 1:1.01

Medium: H34T60N1_0820 Medium parameters used: $f = 5310$ MHz; $\sigma = 4.732$ S/m; $\epsilon_r = 35.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(5.74, 5.74, 5.74) @ 5310 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.63 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.56 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 4.53 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.339 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 2.98 W/kg

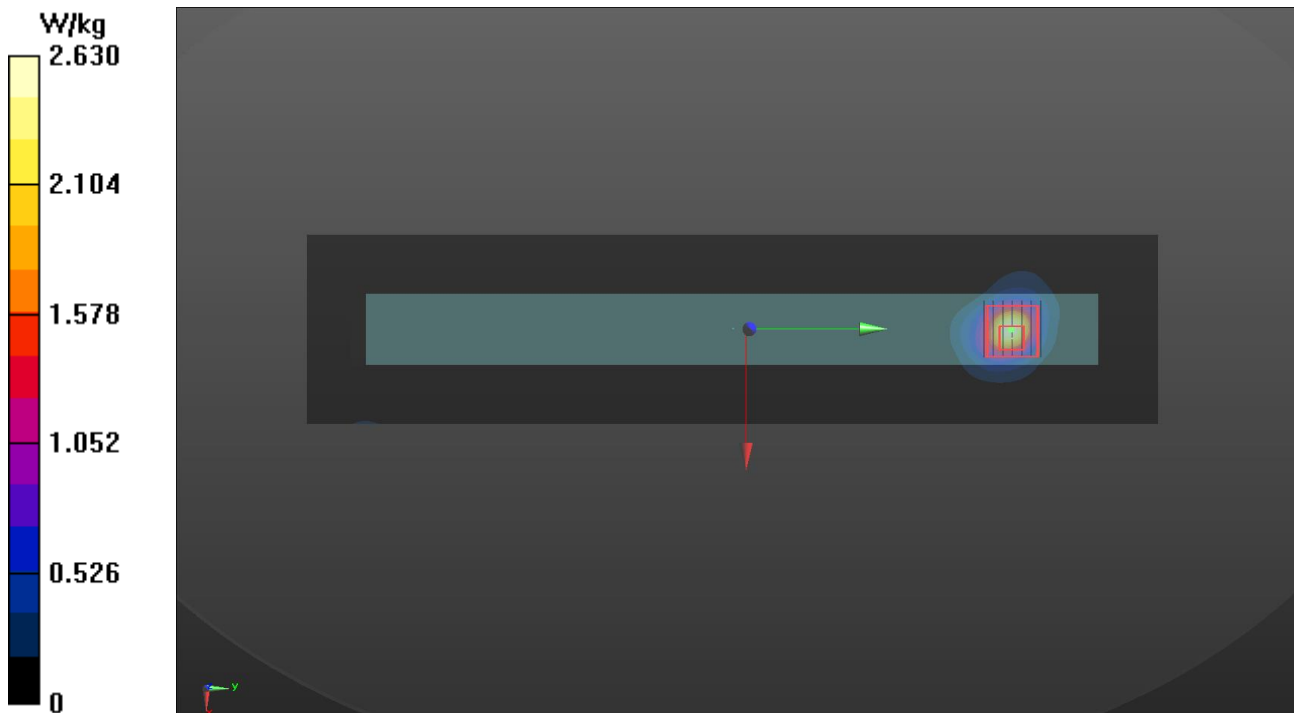

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/20

P03 WLAN5.6G_802.11a_Top Side_0mm_Ch132_Sample 1_Ant 0+1_P-Sensor w_o Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10062 - CAD, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5660 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0820 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 34.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(4.93, 4.93, 4.93) @ 5660 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.23 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.48 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 4.46 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.344 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 2.83 W/kg

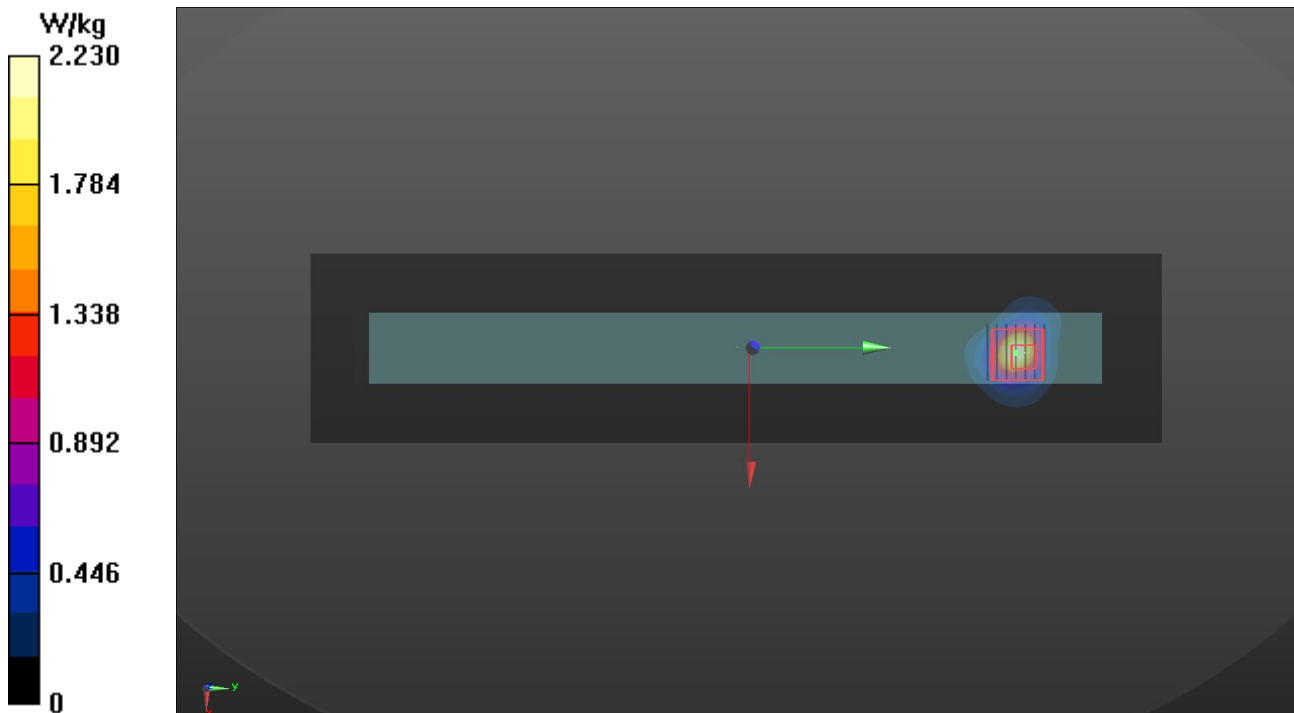

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/21

P04 WLAN5.8G_802.11a_Top Side_0mm_Ch157_Sample 1_Ant 0+1_P-Sensor w_o Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10062 - CAD, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0821 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.279$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(5.05, 5.05, 5.05) @ 5785 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.56 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 17.88 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.232 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 1.77 W/kg

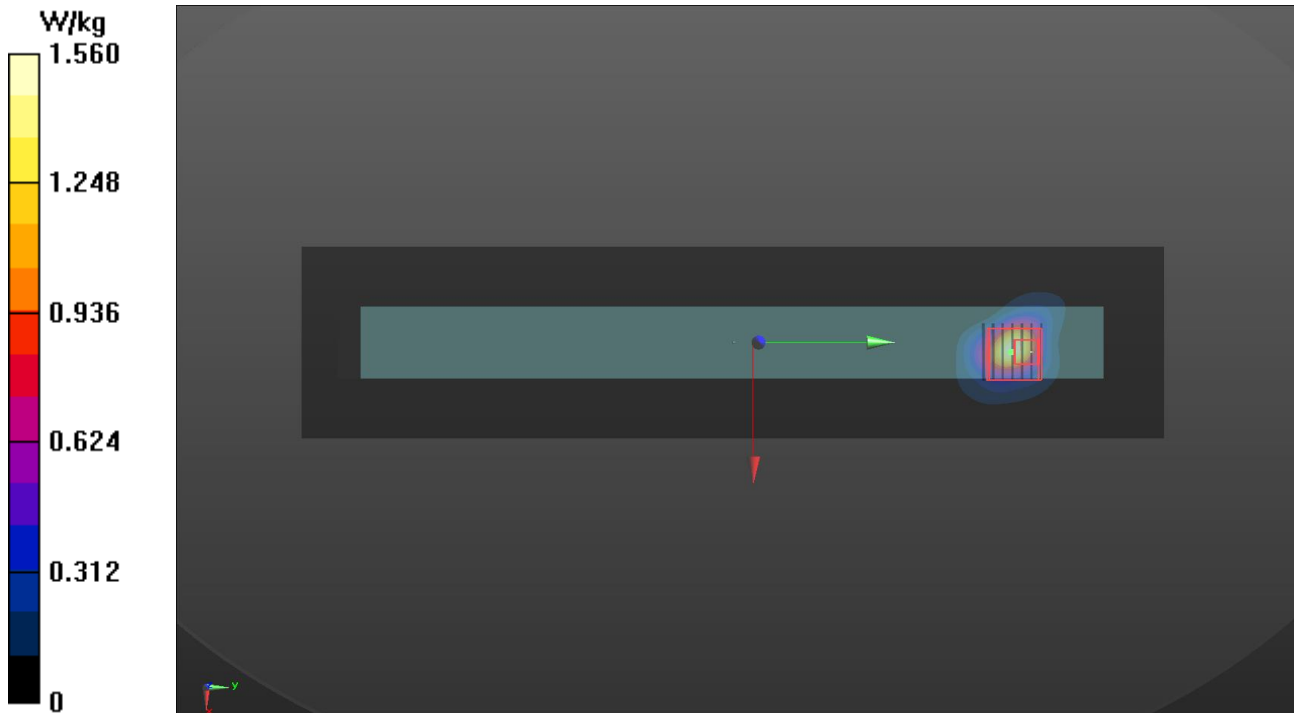

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/8/19

P05 BT_BDR_Left Side_0mm_Ch39_Sample 1_Ant 1_P-Sensor w_o_Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_0819 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 39.114$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7736; ConvF(8.12, 8.12, 8.12) @ 2441 MHz; Calibrated: 2022/5/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2022/6/1
- Phantom: ELI Phantom_1204; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x191x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.427 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.085 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.050 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.142 W/kg

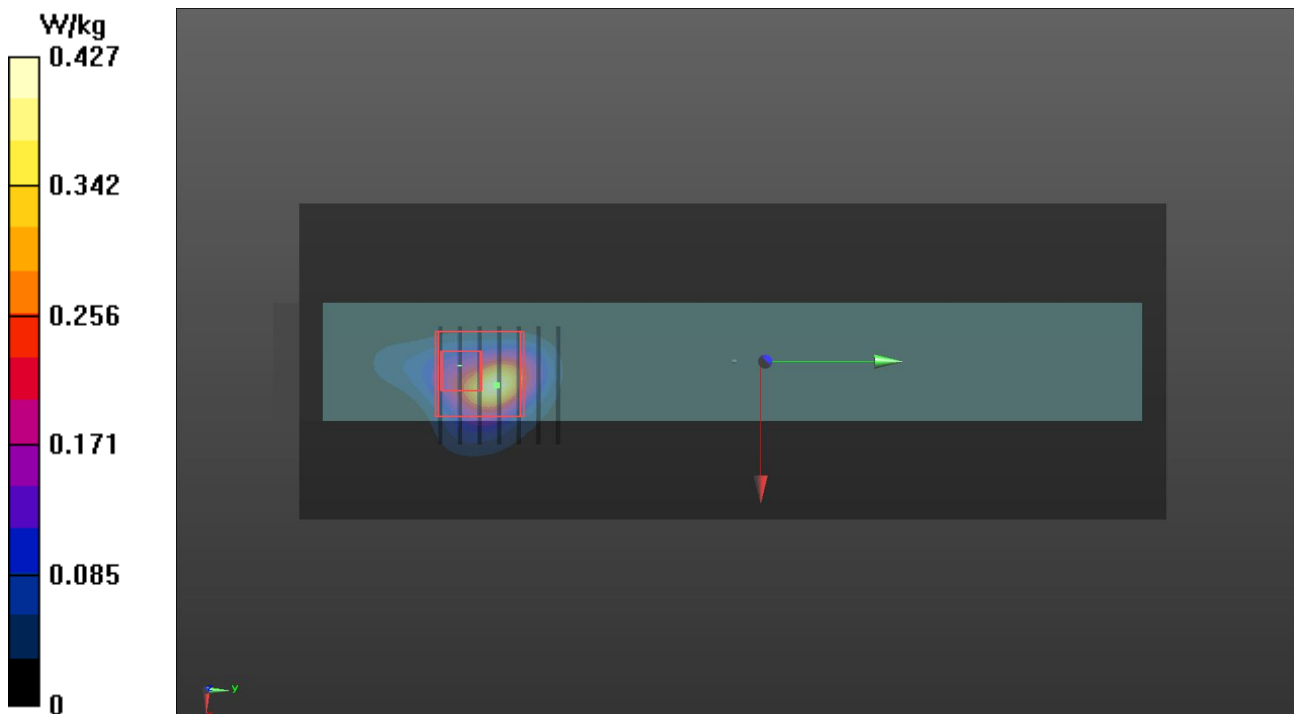

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/16

P06 WLAN2.4G_802.11b_Top Side_0mm_Ch6_Sample 1_Ant 0_P-Sensor w_o_Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0816 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 37.945$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.82, 7.82, 7.82) @ 2437 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x301x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.78 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.23 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.336 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 1.43 W/kg

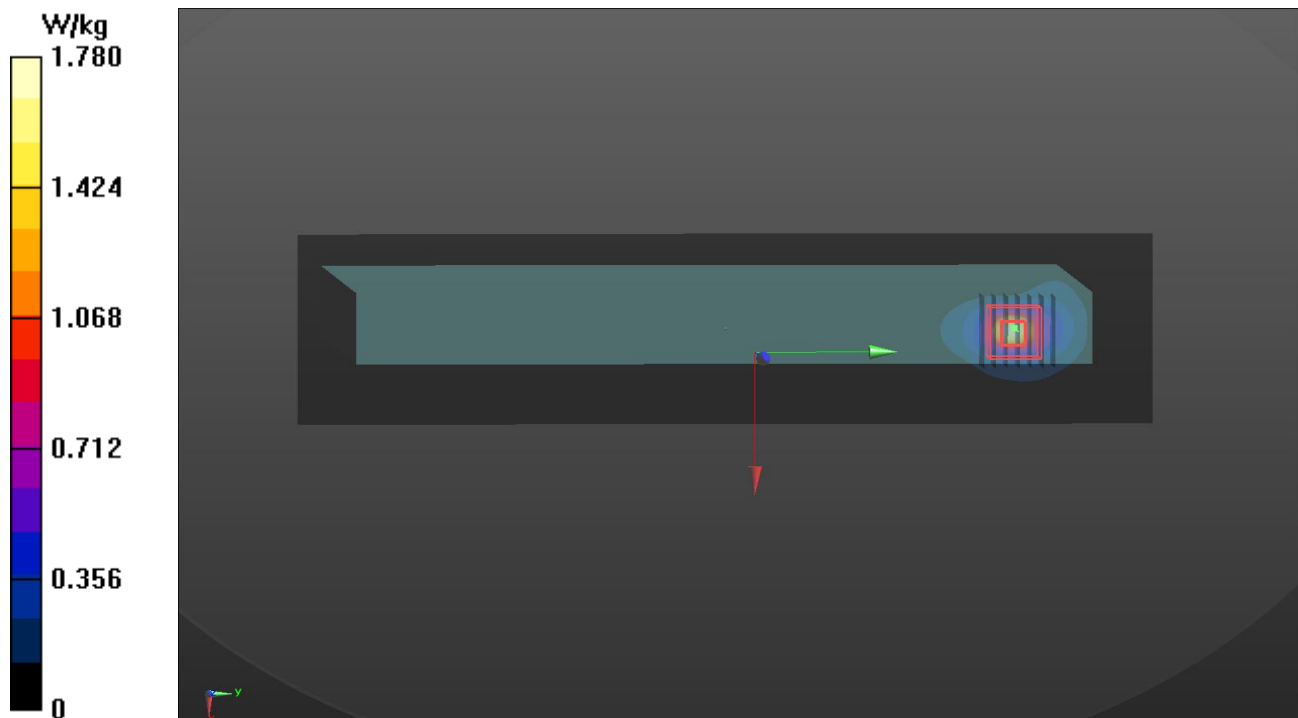

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/17

P07 WLAN5.3G_802.11a_Top Side_0mm_Ch64_Sample 1_Ant 0+1_P-Sensor w_o Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10062 - CAD, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0817 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.874$ S/m; $\epsilon_r = 35.232$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.28, 5.28, 5.28) @ 5320 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 17.40 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.205 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 1.40 W/kg

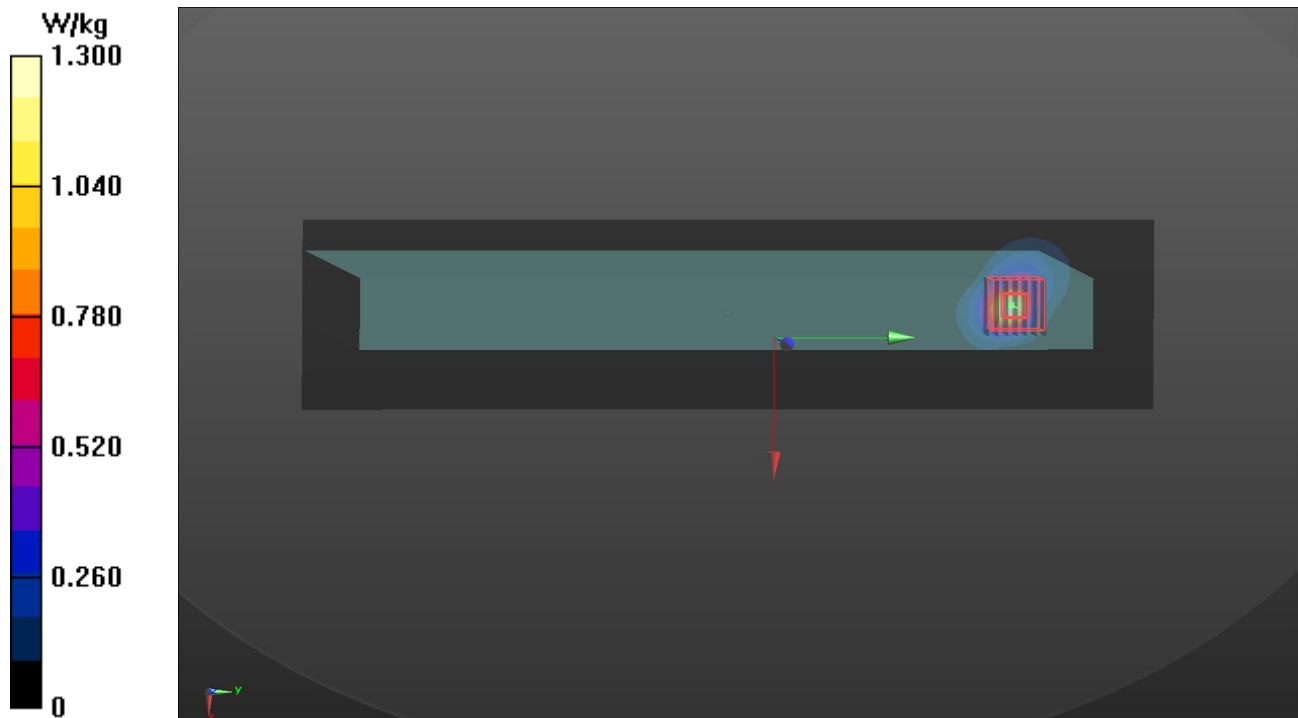

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/17

P08 WLAN5.6G_802.11a_Top Side_0mm_Ch132_Sample 1_Ant 0+1_P-Sensor w_o Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10062 - CAD, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5660 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0817 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 34.639$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(4.78, 4.78, 4.78) @ 5660 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.71 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.167 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 1.15 W/kg

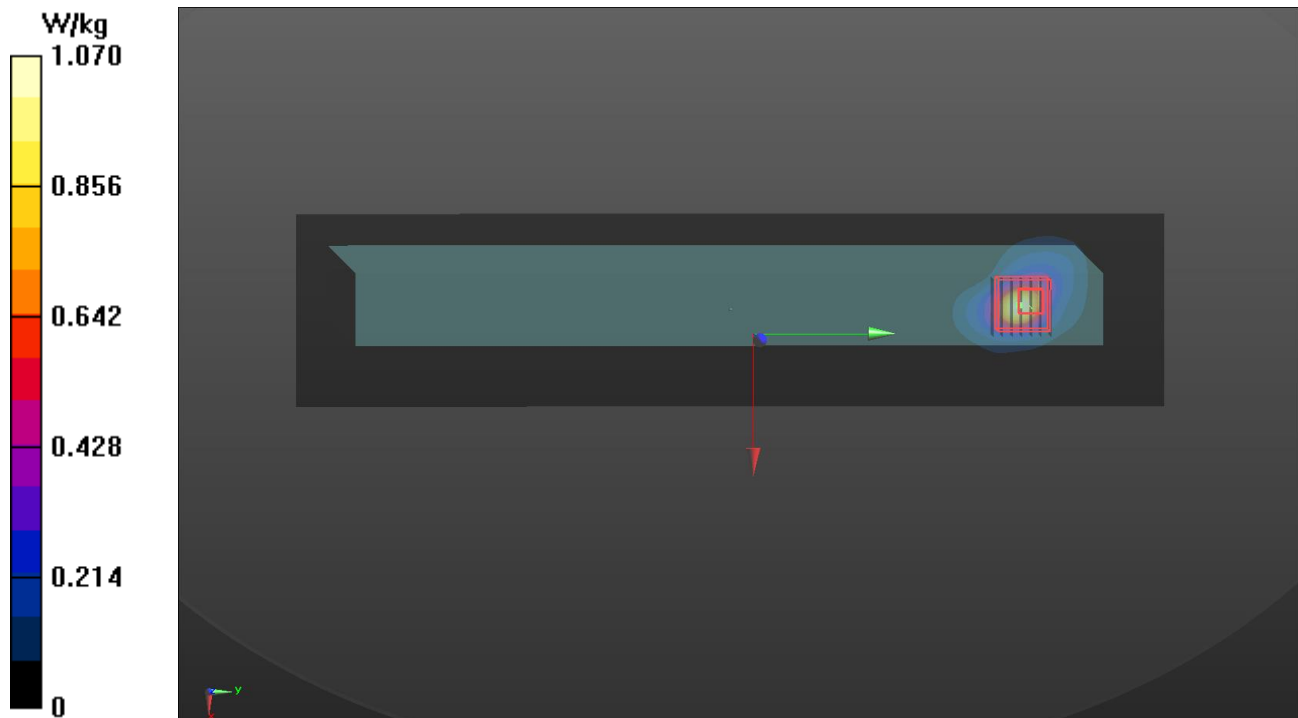

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/18

P09 WLAN5.8G_802.11a_Top Side_0mm_Ch157_Sample 1_Ant 0+1_P-Sensor w_o Handheld w_o

DUT: BEDW-WTW-P22050060

Communication System: UID 10062 - CAD, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0818 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.206$ S/m; $\epsilon_r = 35.429$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(5.06, 5.06, 5.06) @ 5785 MHz; Calibrated: 2022/03/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2022/03/23
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.626 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.08 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.093 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.696 W/kg

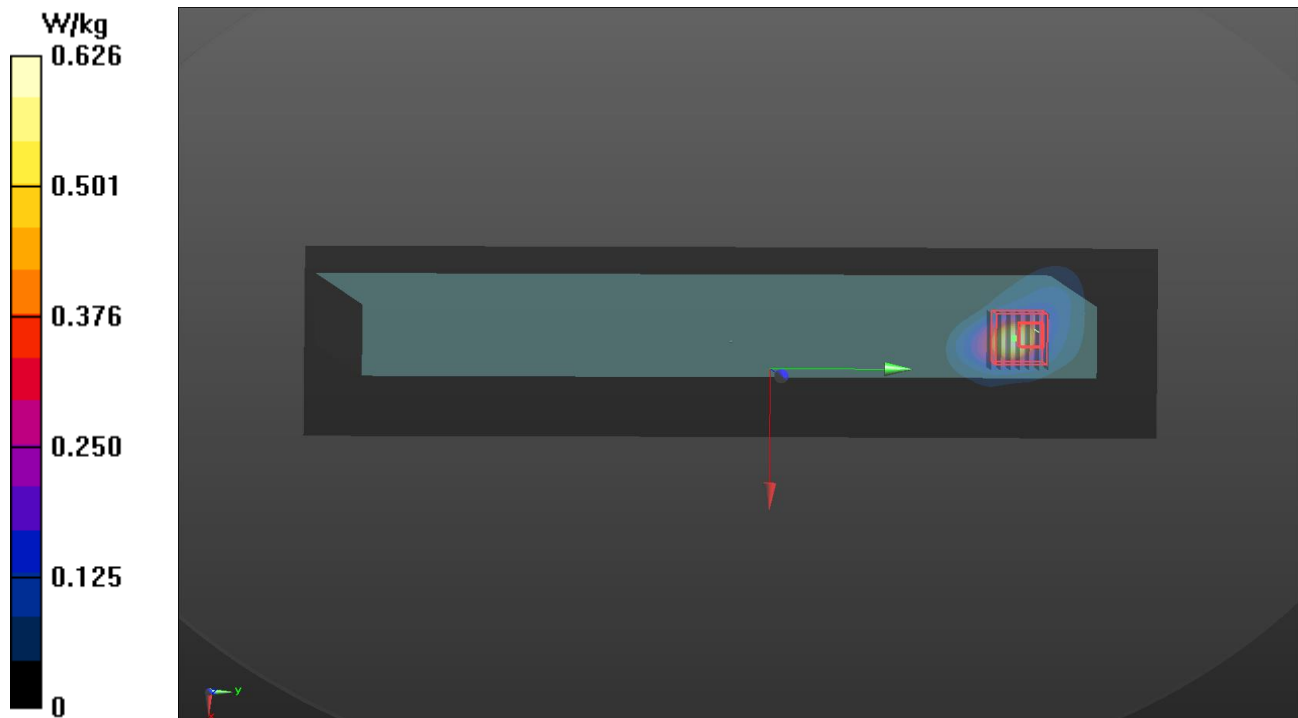

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/08/12

P12 RFID_ASK_Rear Face_0mm_Frequency13.56

DUT: BEDW-WTW-P22050060

Communication System: UID 0, CW; Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: H06_0812 Medium parameters used (interpolated): $f = 13.56$ MHz; $\sigma = 0.727$ S/m; $\epsilon_r = 55.81$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7720; ConvF(16.69, 16.69, 16.69) @ 13.56 MHz; Calibrated: 2022/03/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1698; Calibrated: 2021/11/09
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (261x361x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0 W/kg

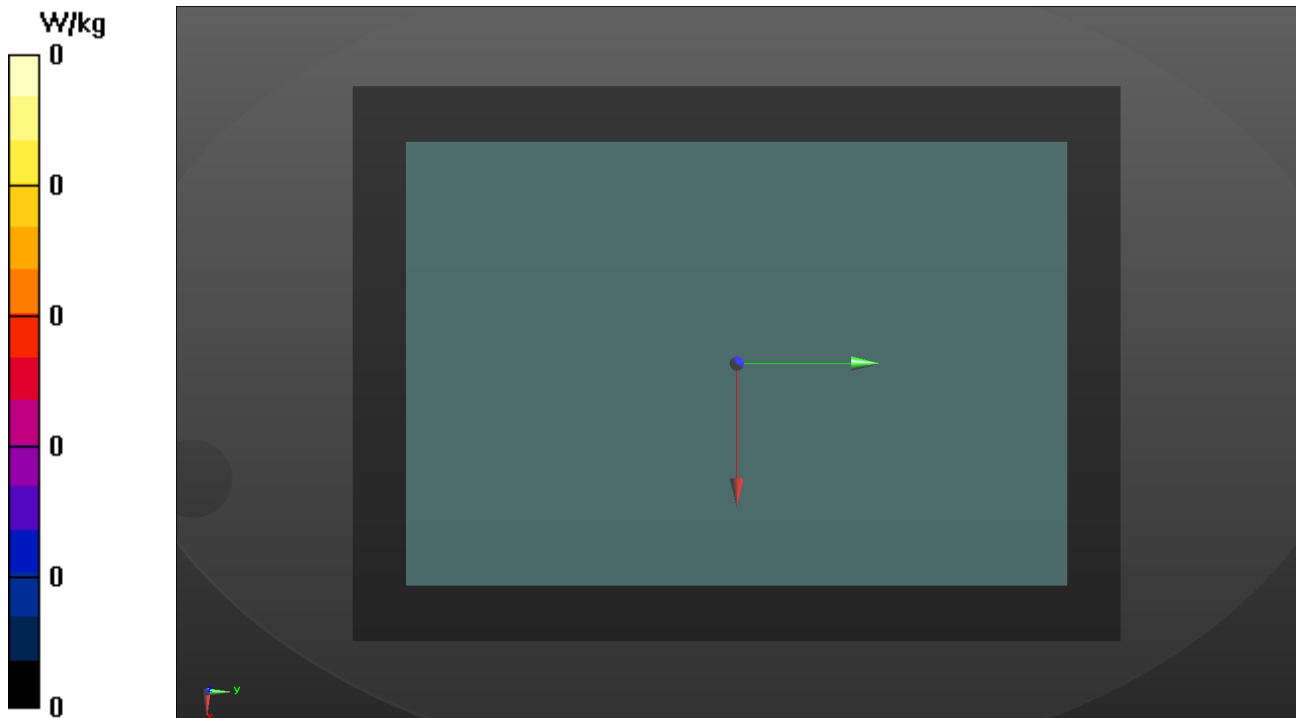

Plots of Measurement

Measurement Report

P10 UNII-6_802.11a_Top Side_0mm_Ch97_Sample 1_Ant 0_P-sensor w_o_Handheld_w_o

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P22050060,	208.0 x 310.0 x 30.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	U-NII-6	WLAN, 10062-CAC	6435.0, 97	5.45	6.20	33.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1_0822 , 2022-Aug-22	EX3DV4 - SN7537, 2022-04-27	DAE4 Sn1585, 2022-04-21

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 360.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-22	2022-08-22
psSAR1g [W/kg]	0.444	0.452
psSAR10g [W/kg]	0.145	0.136
psPDab (1.0cm2, sq)[W/m2]	4.44	4.52
psPDab (4.0cm2, sq)[W/m2]	3.62	3.39
Power Drift [dB]	-0.05	0.05
M2/M1 [%]		54.3
Dist 3dB Peak [mm]		6.1

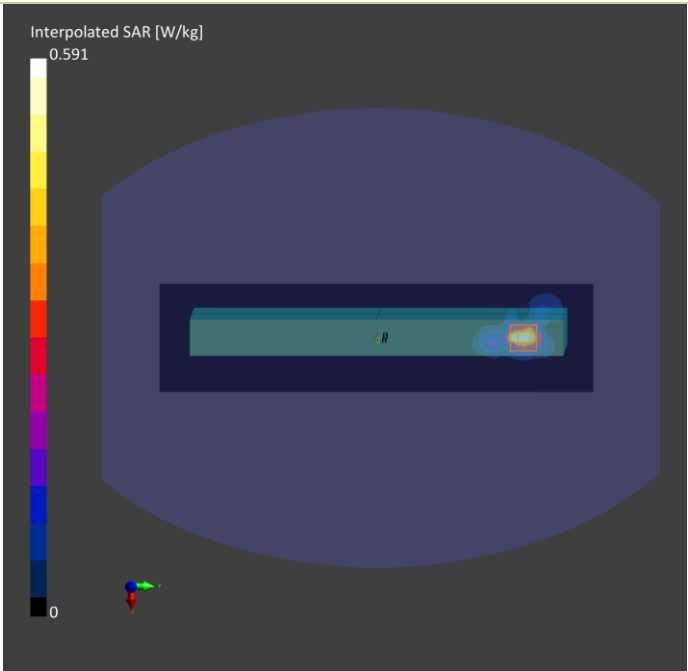

Plots of Measurement

Measurement Report

P11 UNII-8_802.11a_Top Side_0mm_Ch217_Sample 1_Ant 0_P-sensor w_o_Handheld_w_o

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P22050060,	208.0 x 310.0 x 30.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	UNII-8	WLAN, 10062-CAC	7035.0, 217	5.45	6.76	32.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1_0822 , 2022-Aug-22	EX3DV4 - SN7537, 2022-04-27	DAE4 Sn1585, 2022-04-21

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 374.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-22	2022-08-22
psSAR1g [W/kg]	0.279	0.294
psSAR10g [W/kg]	0.089	0.082
psPDab (1.0cm2, sq)[W/m2]	2.97	2.94
psPDab (4.0cm2, sq)[W/m2]	2.23	2.05
Power Drift [dB]	0.11	0.04
M2/M1 [%]		49.0
Dist 3dB Peak [mm]		6.2

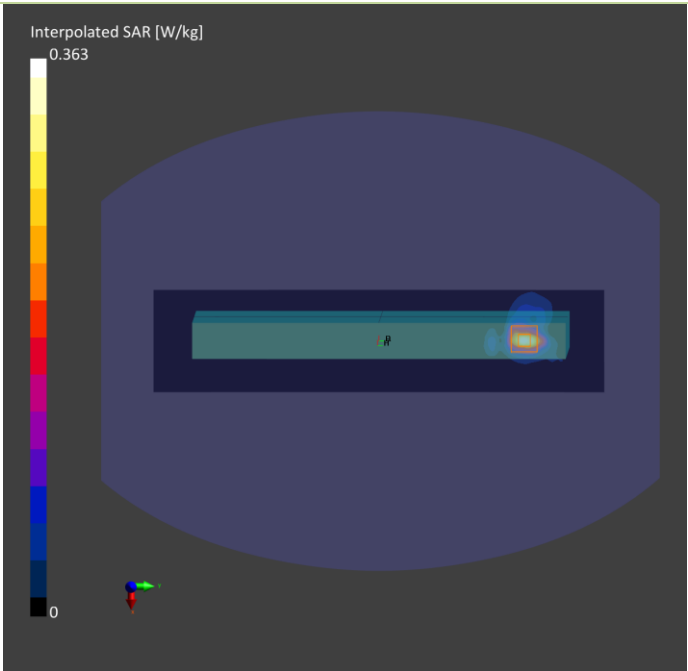

Plots of Measurement

Measurement Report

P10 UNII-6_802.11a_Top Side_0mm_Ch97_Sample 1_Ant 0_P-Sensor_w_o_Handheld_w_o

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P22050060	208.0 x 310.0 x 30.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Top Side, 0.00	U-NII-6	WLAN, 10671-AAC	6435.0, 97	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	Air---	EUmmWV4 - SN9438_F1-55GHz, 2022-07-18	DAE4 Sn1431, 2022-02-23

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2022-08-22,
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.40
psPDtot+ [W/m ²]	3.79
psPDmod+ [W/m ²]	3.90
E _{max} [V/m]	50.6
Power Drift [dB]	-0.10

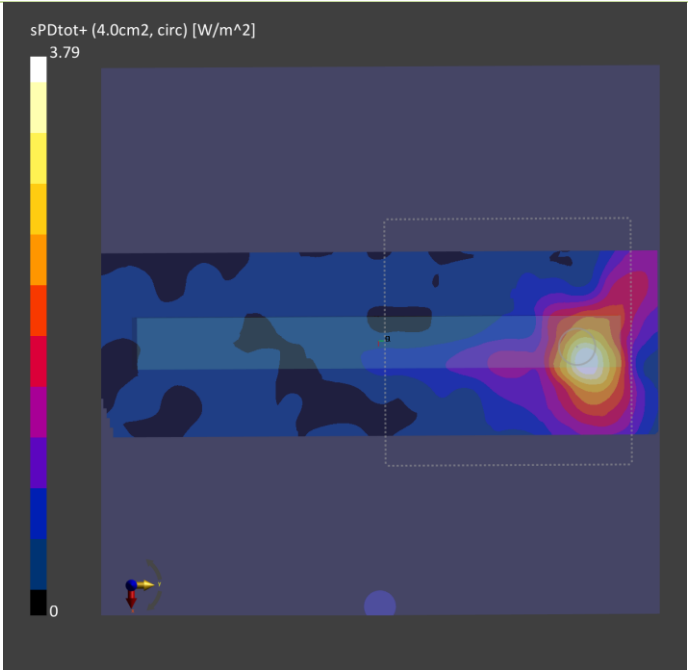

Plots of Measurement

Measurement Report

P11 UNII-8_802.11a_Top Side_0mm_Ch217_Sample 1_Ant 0_P-sensor w_o_Handheld_w_o

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P22050060	208.0 x 310.0 x 30.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Top Side, 0.00	U-NII-8	WLAN, 10671-AAC	7035.0, 217	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	Air---	EUmmWV4 - SN9438_F1-55GHz, 2022-07-18	DAE4 Sn1431, 2022-02-23

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2022-08-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.63
psPDtot+ [W/m ²]	1.75
psPDmod+ [W/m ²]	1.82
E _{max} [V/m]	37.8
Power Drift [dB]	-0.09

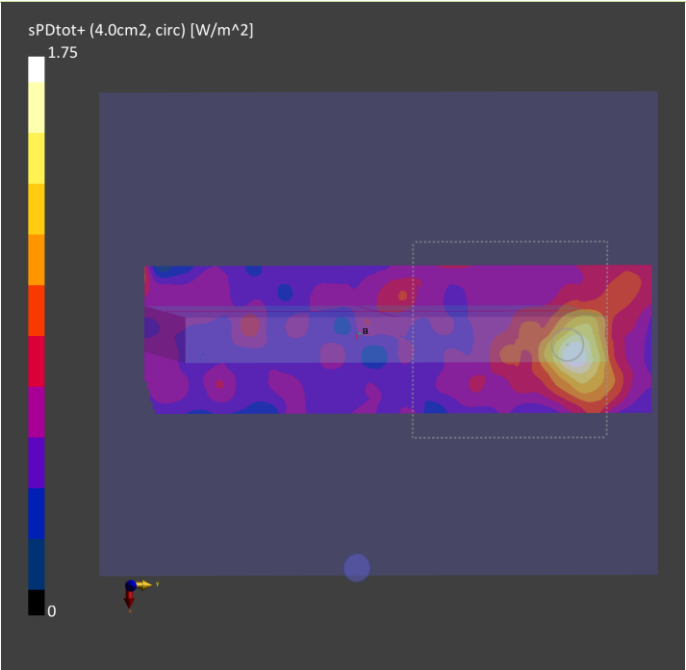

Annex C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within ± 10 % of the target values. Liquid temperature during the SAR testing has kept within ± 2 °C.
2. For Section 4.4, The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Annex A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Validation					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)
S01	2450	23.4	1.869	39.087	1.8	39.2	3.83	-0.29	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 19, 2022	2450	52.60	2.48	49.48	-5.93	737	7736	579	17
S02	5250	23.2	4.726	35.505	4.71	35.9	0.34	-1.10	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 20, 2022	5250	80.60	4.05	80.81	0.26	1019	7736	579	17
S03	5600	23.2	5.018	35.009	5.07	35.5	-1.03	-1.38	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 20, 2022	5600	82.40	4.08	81.41	-1.21	1019	7736	579	17
S04	5750	23.3	5.3	34.398	5.22	35.4	1.53	-2.83	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 21, 2022	5750	79.40	3.92	78.21	-1.49	1019	7736	579	17
S05	2450	23.4	1.869	39.087	1.8	39.2	3.83	-0.29	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 19, 2022	2450	52.60	2.48	49.48	-5.93	737	7736	579	17
S06	2450	23.4	1.849	37.901	1.8	39.2	2.72	-3.31	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 16, 2022	2450	52.60	2.38	47.49	-9.72	737	3650	861	17
S07	5250	23.5	4.799	35.398	4.71	35.9	1.89	-1.40	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 17, 2022	5250	80.60	4.07	81.21	0.75	1019	3650	861	17
S08	5600	23.5	5.175	34.802	5.07	35.5	2.07	-1.97	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 17, 2022	5600	82.40	4.33	86.39	4.85	1019	3650	861	17
S09	5750	23.3	5.255	35.49	5.22	35.4	0.67	0.25	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 18, 2022	5750	79.40	3.76	75.02	-5.51	1019	3650	861	17
S12	13	23.2	0.727	55.95	0.75	55	-3.07	1.73	Pass	Pass	Pass	N/A	N/A	N/A	Aug. 12, 2022	13	0.56	0.014	0.56	-1.00	1018	7720	1698	14
S10	6500	23.3	6.19	33.8	6.07	34.5	1.98	-2.03	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 22, 2022	6500	289.00	28.3	283.00	-2.08	1008	7537	1585	20
S11	6500	23.3	6.19	33.8	6.07	34.5	1.98	-2.03	Pass	Pass	Pass	OFDM	N/A	Pass	Aug. 22, 2022	6500	289.00	28.3	283.00	-2.08	1008	7537	1585	20

Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]	Averaging
S10	Aug. 22, 2022	10	9438	1025	4	10.0	51.3	48.1	-6.24%	Circular
S11	Aug. 22, 2022	10	9438	1025	4	10.0	51.3	48.1	-6.24%	Circular

Annex D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	18.0	18.0	18.0	18.0	21.0
	6	2437	19.0	19.0	19.0	19.0	22.0
	11	2462	18.0	18.0	18.0	18.0	21.0
	12	2467	17.0	17.0	17.0	17.0	20.0
	13	2472	14.5	14.5	14.5	14.5	17.5
802.11g	1	2412	16.0	16.0	16.0	16.0	19.0
	6	2437	19.0	19.0	19.0	19.0	22.0
	11	2462	16.5	16.5	16.5	16.5	19.5
	12	2467	14.5	14.5	14.5	14.5	17.5
	13	2472	2.5	2.5	2.5	2.5	5.5
802.11n HT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	3.0	2.0	2.0	5.0
802.11n HT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ac VHT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ac VHT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ax HE20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ax HE40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
Bluetooth							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
BR / EDR	0	2402		16.0			
	39	2441		16.0			
	78	2480		16.0			
LE	0	2402		7.0			
	19	2440		7.0			
	39	2480		7.0			

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11n HT20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11n HT40	38	5190	13.0	12.5	12.5	12.5	15.5
	46	5230	13.5	12.5	12.5	12.5	15.5
802.11ac VHT20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	38	5190	13.0	12.5	12.5	12.5	15.5
	46	5230	13.5	12.5	12.5	12.5	15.5
802.11ac VHT80	42	5210	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	38	5190	13.0	12.5	12.5	12.5	15.5
	46	5230	13.5	12.5	12.5	12.5	15.5
802.11ax HE80	42	5210	11.0	11.0	11.0	11.0	14.0

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	14.5	13.0	13.0	13.0	16.0
	56	5280	17.5	13.0	13.0	13.0	16.0
	60	5300	17.5	13.0	13.0	13.0	16.0
	64	5320	14.5	13.0	13.0	13.0	16.0
802.11n HT20	52	5260	14.5	13.0	13.0	13.0	16.0
	56	5280	16.0	13.0	13.0	13.0	16.0
	60	5300	16.0	13.0	13.0	13.0	16.0
	64	5320	14.5	13.0	13.0	13.0	16.0
802.11n HT40	54	5270	15.5	12.5	12.5	12.5	15.5
	62	5310	14.0	12.5	12.5	12.5	15.5
802.11ac VHT20	52	5260	14.5	13.0	13.0	13.0	16.0
	56	5280	16.0	13.0	13.0	13.0	16.0
	60	5300	16.0	13.0	13.0	13.0	16.0
	64	5320	14.5	13.0	13.0	13.0	16.0
802.11ac VHT40	54	5270	15.5	12.5	12.5	12.5	15.5
	62	5310	14.0	12.5	12.5	12.5	15.5
802.11ac VHT80	58	5290	12.5	12.5	12.5	12.5	15.5
802.11ac VHT160	50	5250	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	52	5260	14.5	13.0	13.0	13.0	16.0
	56	5280	16.0	13.0	13.0	13.0	16.0
	60	5300	16.0	13.0	13.0	13.0	16.0
	64	5320	14.5	13.0	13.0	13.0	16.0
802.11ax HE40	54	5270	15.5	12.5	12.5	12.5	15.5
	62	5310	14.0	12.5	12.5	12.5	15.5
802.11ax HE80	58	5290	12.5	12.5	12.5	12.5	15.5
802.11ax HE160	50	5250	11.0	11.0	11.0	11.0	14.0

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	14.5	12.0	12.0	12.0	15.0
	116	5580	17.0	12.0	12.0	12.0	15.0
	120	5600	17.0	12.0	12.0	12.0	15.0
	124	5620	17.0	12.0	12.0	12.0	15.0
	132	5660	17.0	12.0	12.0	12.0	15.0
	140	5700	14.5	12.0	12.0	12.0	15.0
802.11n HT20	144	5720	17.5	12.0	12.0	12.0	15.0
	100	5500	14.5	12.0	12.0	12.0	15.0
	116	5580	16.0	12.0	12.0	12.0	15.0
	120	5600	16.0	12.0	12.0	12.0	15.0
	124	5620	16.0	12.0	12.0	12.0	15.0
	132	5660	16.0	12.0	12.0	12.0	15.0
802.11n HT40	140	5700	14.5	12.0	12.0	12.0	15.0
	144	5720	16.0	12.0	12.0	12.0	15.0
	102	5510	14.0	11.5	11.5	11.5	14.5
	110	5550	15.5	11.5	11.5	11.5	14.5
	118	5590	15.5	11.5	11.5	11.5	14.5
	126	5630	15.5	11.5	11.5	11.5	14.5
802.11ac VHT20	134	5670	14.0	11.5	11.5	11.5	14.5
	142	5710	15.5	11.5	11.5	11.5	14.5
	100	5500	14.5	12.0	12.0	12.0	15.0
	116	5580	16.0	12.0	12.0	12.0	15.0
	120	5600	16.0	12.0	12.0	12.0	15.0
	124	5620	16.0	12.0	12.0	12.0	15.0
802.11ac VHT40	132	5660	16.0	12.0	12.0	12.0	15.0
	140	5700	14.5	12.0	12.0	12.0	15.0
	144	5720	16.0	12.0	12.0	12.0	15.0
	102	5510	14.0	11.5	11.5	11.5	14.5
	110	5550	15.5	11.5	11.5	11.5	14.5
	118	5590	15.5	11.5	11.5	11.5	14.5
802.11ac VHT80	126	5630	15.5	11.5	11.5	11.5	14.5
	134	5670	14.0	11.5	11.5	11.5	14.5
	142	5710	15.5	11.5	11.5	11.5	14.5
802.11ac VHT160	106	5530	13.5	11.5	11.5	11.5	14.5
	122	5610	13.5	11.5	11.5	11.5	14.5
	138	5690	15.0	11.5	11.5	11.5	14.5
802.11ax HE20	114	5570	12.5	11.5	11.5	11.5	14.5
	100	5500	14.5	12.0	12.0	12.0	15.0
	116	5580	16.0	12.0	12.0	12.0	15.0
	120	5600	16.0	12.0	12.0	12.0	15.0
	124	5620	16.0	12.0	12.0	12.0	15.0
	132	5660	16.0	12.0	12.0	12.0	15.0
802.11ax HE40	140	5700	14.5	12.0	12.0	12.0	15.0
	144	5720	16.0	12.0	12.0	12.0	15.0
	102	5510	14.0	11.5	11.5	11.5	14.5
	110	5550	15.5	11.5	11.5	11.5	14.5
	118	5590	15.5	11.5	11.5	11.5	14.5
	126	5630	15.5	11.5	11.5	11.5	14.5
802.11ax HE80	134	5670	14.0	11.5	11.5	11.5	14.5
	142	5710	15.5	11.5	11.5	11.5	14.5
	106	5530	13.5	11.5	11.5	11.5	14.5
802.11ax HE160	122	5610	13.5	11.5	11.5	11.5	14.5
	138	5690	15.0	11.5	11.5	11.5	14.5
	114	5570	12.5	11.5	11.5	11.5	14.5

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	17.5	11.0	11.0	11.0	14.0
	153	5765	17.5	11.0	11.0	11.0	14.0
	157	5785	17.5	11.0	11.0	11.0	14.0
	161	5805	17.5	11.0	11.0	11.0	14.0
	165	5825	17.5	11.0	11.0	11.0	14.0
802.11n HT20	149	5745	16.0	11.0	11.0	11.0	14.0
	153	5765	16.0	11.0	11.0	11.0	14.0
	157	5785	16.0	11.0	11.0	11.0	14.0
	161	5805	16.0	11.0	11.0	11.0	14.0
	165	5825	16.0	11.0	11.0	11.0	14.0
802.11n HT40	151	5755	15.5	10.5	10.5	10.5	13.5
	159	5795	15.5	10.5	10.5	10.5	13.5
802.11ac VHT20	149	5745	16.0	11.0	11.0	11.0	14.0
	153	5765	16.0	11.0	11.0	11.0	14.0
	157	5785	16.0	11.0	11.0	11.0	14.0
	161	5805	16.0	11.0	11.0	11.0	14.0
	165	5825	16.0	11.0	11.0	11.0	14.0
802.11ac VHT40	151	5755	15.5	10.5	10.5	10.5	13.5
	159	5795	15.5	10.5	10.5	10.5	13.5
802.11ac VHT80	155	5775	15.0	10.5	10.5	10.5	13.5
802.11ax HE20	149	5745	16.0	11.0	11.0	11.0	14.0
	153	5765	16.0	11.0	11.0	11.0	14.0
	157	5785	16.0	11.0	11.0	11.0	14.0
	161	5805	16.0	11.0	11.0	11.0	14.0
	165	5825	16.0	11.0	11.0	11.0	14.0
802.11ax HE40	151	5755	15.5	10.5	10.5	10.5	13.5
	159	5795	15.5	10.5	10.5	10.5	13.5
802.11ax HE80	155	5775	15.0	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	17.5	11.0	11.0	11.0	14.0
	5	5975	17.5	11.0	11.0	11.0	14.0
	9	5995	17.5	11.0	11.0	11.0	14.0
	13	6015	17.5	11.0	11.0	11.0	14.0
	17	6035	17.5	11.0	11.0	11.0	14.0
	21	6055	17.5	11.0	11.0	11.0	14.0
	25	6075	17.5	11.0	11.0	11.0	14.0
	29	6095	17.5	11.0	11.0	11.0	14.0
	33	6115	17.5	11.0	11.0	11.0	14.0
	37	6135	17.5	11.0	11.0	11.0	14.0
	41	6155	17.5	11.0	11.0	11.0	14.0
	45	6175	17.5	11.0	11.0	11.0	14.0
	49	6195	17.5	11.0	11.0	11.0	14.0
	53	6215	17.5	11.0	11.0	11.0	14.0
	57	6235	17.5	11.0	11.0	11.0	14.0
	61	6255	17.5	11.0	11.0	11.0	14.0
	65	6275	17.5	11.0	11.0	11.0	14.0
	69	6295	17.5	11.0	11.0	11.0	14.0
	73	6315	17.5	11.0	11.0	11.0	14.0
	77	6335	17.5	11.0	11.0	11.0	14.0
	81	6355	17.5	11.0	11.0	11.0	14.0
802.11ax HE20	85	6375	17.5	11.0	11.0	11.0	14.0
	89	6395	17.5	11.0	11.0	11.0	14.0
	93	6415	17.5	11.0	11.0	11.0	14.0
	1	5955	14.5	11.0	11.0	11.0	14.0
	5	5975	14.5	11.0	11.0	11.0	14.0
	9	5995	14.5	11.0	11.0	11.0	14.0
	13	6015	14.5	11.0	11.0	11.0	14.0
	17	6035	14.5	11.0	11.0	11.0	14.0
	21	6055	14.5	11.0	11.0	11.0	14.0
	25	6075	14.5	11.0	11.0	11.0	14.0
	29	6095	14.5	11.0	11.0	11.0	14.0
	33	6115	14.5	11.0	11.0	11.0	14.0
	37	6135	14.5	11.0	11.0	11.0	14.0
	41	6155	14.5	11.0	11.0	11.0	14.0
	45	6175	14.5	11.0	11.0	11.0	14.0
	49	6195	14.5	11.0	11.0	11.0	14.0
	53	6215	14.5	11.0	11.0	11.0	14.0
	57	6235	14.5	11.0	11.0	11.0	14.0
	61	6255	14.5	11.0	11.0	11.0	14.0
	65	6275	14.5	11.0	11.0	11.0	14.0
802.11ax HE40	69	6295	14.5	11.0	11.0	11.0	14.0
	73	6315	14.5	11.0	11.0	11.0	14.0
	77	6335	14.5	11.0	11.0	11.0	14.0
	81	6355	14.5	11.0	11.0	11.0	14.0
	85	6375	14.5	11.0	11.0	11.0	14.0
	89	6395	14.5	11.0	11.0	11.0	14.0
	93	6415	14.5	11.0	11.0	11.0	14.0
	3	5965	14.0	10.5	10.5	10.5	13.5
	11	6005	14.0	10.5	10.5	10.5	13.5
	19	6045	14.0	10.5	10.5	10.5	13.5
	27	6085	14.0	10.5	10.5	10.5	13.5
	35	6125	14.0	10.5	10.5	10.5	13.5
802.11ax HE80	43	6165	14.0	10.5	10.5	10.5	13.5
	51	6205	14.0	10.5	10.5	10.5	13.5
	59	6245	14.0	10.5	10.5	10.5	13.5
	67	6285	14.0	10.5	10.5	10.5	13.5
	75	6325	14.0	10.5	10.5	10.5	13.5
	83	6365	14.0	10.5	10.5	10.5	13.5
	91	6405	14.0	10.5	10.5	10.5	13.5
	7	5985	13.5	10.5	10.5	10.5	13.5
802.11ax HE160	23	6065	13.5	10.5	10.5	10.5	13.5
	39	6145	13.5	10.5	10.5	10.5	13.5
	55	6225	13.5	10.5	10.5	10.5	13.5
	71	6305	13.5	10.5	10.5	10.5	13.5
	87	6385	13.5	10.5	10.5	10.5	13.5
	15	6025	13.0	10.5	10.5	10.5	13.5
	47	6185	13.0	10.5	10.5	10.5	13.5
	79	6345	13.0	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	11.0	11.0	11.0	11.0	14.0
	101	6455	11.0	11.0	11.0	11.0	14.0
	105	6475	11.0	11.0	11.0	11.0	14.0
	109	6495	11.0	11.0	11.0	11.0	14.0
	113	6515	11.0	11.0	11.0	11.0	14.0
	117	6535	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	97	6435	11.0	11.0	11.0	11.0	14.0
	101	6455	11.0	11.0	11.0	11.0	14.0
	105	6475	11.0	11.0	11.0	11.0	14.0
	109	6495	11.0	11.0	11.0	11.0	14.0
	113	6515	11.0	11.0	11.0	11.0	14.0
	117	6535	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	99	6445	10.5	10.5	10.5	10.5	13.5
	107	6485	10.5	10.5	10.5	10.5	13.5
	115	6525	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	103	6465	10.5	10.5	10.5	10.5	13.5
	119	6545	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	111	6505	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	121	6555	17.5	11.0	11.0	11.0	14.0
	125	6575	17.5	11.0	11.0	11.0	14.0
	129	6595	17.5	11.0	11.0	11.0	14.0
	133	6615	17.5	11.0	11.0	11.0	14.0
	137	6635	17.5	11.0	11.0	11.0	14.0
	141	6655	17.5	11.0	11.0	11.0	14.0
	145	6675	17.5	11.0	11.0	11.0	14.0
	149	6695	17.5	11.0	11.0	11.0	14.0
	153	6715	17.5	11.0	11.0	11.0	14.0
	157	6735	17.5	11.0	11.0	11.0	14.0
	161	6755	17.5	11.0	11.0	11.0	14.0
	165	6775	17.5	11.0	11.0	11.0	14.0
	169	6795	17.5	11.0	11.0	11.0	14.0
	173	6815	17.5	11.0	11.0	11.0	14.0
	177	6835	17.5	11.0	11.0	11.0	14.0
	181	6855	17.5	11.0	11.0	11.0	14.0
	185	6875	17.5	11.0	11.0	11.0	14.0
802.11ax HE20	121	6555	14.5	11.0	11.0	11.0	14.0
	125	6575	14.5	11.0	11.0	11.0	14.0
	129	6595	14.5	11.0	11.0	11.0	14.0
	133	6615	14.5	11.0	11.0	11.0	14.0
	137	6635	14.5	11.0	11.0	11.0	14.0
	141	6655	14.5	11.0	11.0	11.0	14.0
	145	6675	14.5	11.0	11.0	11.0	14.0
	149	6695	14.5	11.0	11.0	11.0	14.0
	153	6715	14.5	11.0	11.0	11.0	14.0
	157	6735	14.5	11.0	11.0	11.0	14.0
	161	6755	14.5	11.0	11.0	11.0	14.0
	165	6775	14.5	11.0	11.0	11.0	14.0
	169	6795	14.5	11.0	11.0	11.0	14.0
	173	6815	14.5	11.0	11.0	11.0	14.0
	177	6835	14.5	11.0	11.0	11.0	14.0
	181	6855	14.5	11.0	11.0	11.0	14.0
	185	6875	14.5	11.0	11.0	11.0	14.0
802.11ax HE40	123	6565	14.0	10.5	10.5	10.5	13.5
	131	6605	14.0	10.5	10.5	10.5	13.5
	139	6645	14.0	10.5	10.5	10.5	13.5
	147	6685	14.0	10.5	10.5	10.5	13.5
	155	6725	14.0	10.5	10.5	10.5	13.5
	163	6765	14.0	10.5	10.5	10.5	13.5
	171	6805	14.0	10.5	10.5	10.5	13.5
	179	6845	14.0	10.5	10.5	10.5	13.5
802.11ax HE80	187	6885	14.0	10.5	10.5	10.5	13.5
	135	6625	13.5	10.5	10.5	10.5	13.5
	151	6705	13.5	10.5	10.5	10.5	13.5
	167	6785	13.5	10.5	10.5	10.5	13.5
802.11ax HE160	183	6865	13.5	10.5	10.5	10.5	13.5
	143	6665	13.0	10.5	10.5	10.5	13.5
	175	6825	13.0	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor OFF)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	11.0	11.0	11.0	11.0	14.0
	193	6915	11.0	11.0	11.0	11.0	14.0
	197	6935	11.0	11.0	11.0	11.0	14.0
	201	6955	11.0	11.0	11.0	11.0	14.0
	205	6975	11.0	11.0	11.0	11.0	14.0
	209	6995	11.0	11.0	11.0	11.0	14.0
	213	7015	11.0	11.0	11.0	11.0	14.0
	217	7035	11.0	11.0	11.0	11.0	14.0
	221	7055	11.0	11.0	11.0	11.0	14.0
	225	7075	11.0	11.0	11.0	11.0	14.0
	229	7095	11.0	11.0	11.0	11.0	14.0
	233	7115	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	189	6895	11.0	11.0	11.0	11.0	14.0
	193	6915	11.0	11.0	11.0	11.0	14.0
	197	6935	11.0	11.0	11.0	11.0	14.0
	201	6955	11.0	11.0	11.0	11.0	14.0
	205	6975	11.0	11.0	11.0	11.0	14.0
	209	6995	11.0	11.0	11.0	11.0	14.0
	213	7015	11.0	11.0	11.0	11.0	14.0
	217	7035	11.0	11.0	11.0	11.0	14.0
	221	7055	11.0	11.0	11.0	11.0	14.0
	225	7075	11.0	11.0	11.0	11.0	14.0
	229	7095	11.0	11.0	11.0	11.0	14.0
	233	7115	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	195	6925	10.5	10.5	10.5	10.5	13.5
	203	6965	10.5	10.5	10.5	10.5	13.5
	211	7005	10.5	10.5	10.5	10.5	13.5
	219	7045	10.5	10.5	10.5	10.5	13.5
	227	7085	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	199	6945	10.5	10.5	10.5	10.5	13.5
	215	7025	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	207	6985	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	18.0	18.0	18.0	18.0	21.0
	6	2437	19.0	19.0	19.0	19.0	22.0
	11	2462	18.0	18.0	18.0	18.0	21.0
	12	2467	17.0	17.0	17.0	17.0	20.0
	13	2472	14.5	14.5	14.5	14.5	17.5
802.11g	1	2412	16.0	16.0	16.0	16.0	19.0
	6	2437	19.0	19.0	19.0	19.0	22.0
	11	2462	16.5	16.5	16.5	16.5	19.5
	12	2467	14.5	14.5	14.5	14.5	17.5
	13	2472	2.5	2.5	2.5	2.5	5.5
802.11n HT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	3.0	2.0	2.0	5.0
802.11n HT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ac VHT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ac VHT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ax HE20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ax HE40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0

WLAN Tune-up Power (QCNFA765 Sensor ON)							
Bluetooth							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
BR / EDR	0	2402		16.0			
	39	2441		16.0			
	78	2480		16.0			
LE	0	2402		7.0			
	19	2440		7.0			
	39	2480		7.0			

WLAN Tune-up Power (QCNFA765 Sensor ON)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11n HT20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11n HT40	38	5190	12.5	12.5	12.5	12.5	15.5
	46	5230	12.5	12.5	12.5	12.5	15.5
802.11ac VHT20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	38	5190	12.5	12.5	12.5	12.5	15.5
	46	5230	12.5	12.5	12.5	12.5	15.5
802.11ac VHT80	42	5210	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	36	5180	13.0	13.0	13.0	13.0	16.0
	40	5200	13.0	13.0	13.0	13.0	16.0
	44	5220	13.0	13.0	13.0	13.0	16.0
	48	5240	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	38	5190	12.5	12.5	12.5	12.5	15.5
	46	5230	12.5	12.5	12.5	12.5	15.5
802.11ax HE80	42	5210	11.0	11.0	11.0	11.0	14.0

WLAN Tune-up Power (QCNFA765 Sensor ON)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11n HT20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11n HT40	54	5270	14.5	12.5	12.5	12.5	15.5
	62	5310	14.0	12.5	12.5	12.5	15.5
802.11ac VHT20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	54	5270	12.5	12.5	12.5	12.5	15.5
	62	5310	12.5	12.5	12.5	12.5	15.5
802.11ac VHT80	58	5290	12.5	12.5	12.5	12.5	15.5
802.11ac VHT160	50	5250	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	54	5270	12.5	12.5	12.5	12.5	15.5
	62	5310	12.5	12.5	12.5	12.5	15.5
802.11ax HE80	58	5290	12.5	12.5	12.5	12.5	15.5
802.11ax HE160	50	5250	11.0	11.0	11.0	11.0	14.0

WLAN Tune-up Power (QCNFA765 Sensor ON)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	12.0	12.0	12.0	12.0	15.0
	120	5600	12.0	12.0	12.0	12.0	15.0
	124	5620	12.0	12.0	12.0	12.0	15.0
	132	5660	12.0	12.0	12.0	12.0	15.0
	140	5700	12.0	12.0	12.0	12.0	15.0
802.11n HT20	144	5720	12.0	12.0	12.0	12.0	15.0
	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	12.0	12.0	12.0	12.0	15.0
	120	5600	12.0	12.0	12.0	12.0	15.0
	124	5620	12.0	12.0	12.0	12.0	15.0
	132	5660	12.0	12.0	12.0	12.0	15.0
802.11n HT40	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	12.0	12.0	12.0	12.0	15.0
	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	11.5	11.5	11.5	11.5	14.5
	118	5590	11.5	11.5	11.5	11.5	14.5
	126	5630	11.5	11.5	11.5	11.5	14.5
802.11ac VHT20	134	5670	11.5	11.5	11.5	11.5	14.5
	142	5710	11.5	11.5	11.5	11.5	14.5
	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	12.0	12.0	12.0	12.0	15.0
	120	5600	12.0	12.0	12.0	12.0	15.0
	124	5620	12.0	12.0	12.0	12.0	15.0
802.11ac VHT40	132	5660	12.0	12.0	12.0	12.0	15.0
	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	12.0	12.0	12.0	12.0	15.0
	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	11.5	11.5	11.5	11.5	14.5
	118	5590	11.5	11.5	11.5	11.5	14.5
802.11ac VHT80	126	5630	11.5	11.5	11.5	11.5	14.5
	134	5670	11.5	11.5	11.5	11.5	14.5
	142	5710	11.5	11.5	11.5	11.5	14.5
802.11ac VHT160	106	5530	11.5	11.5	11.5	11.5	14.5
	122	5610	11.5	11.5	11.5	11.5	14.5
	138	5690	11.5	11.5	11.5	11.5	14.5
802.11ax HE20	114	5570	11.5	11.5	11.5	11.5	14.5
	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	12.0	12.0	12.0	12.0	15.0
	120	5600	12.0	12.0	12.0	12.0	15.0
	124	5620	12.0	12.0	12.0	12.0	15.0
	132	5660	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	12.0	12.0	12.0	12.0	15.0
	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	11.5	11.5	11.5	11.5	14.5
	118	5590	11.5	11.5	11.5	11.5	14.5
	126	5630	11.5	11.5	11.5	11.5	14.5
802.11ax HE80	134	5670	11.5	11.5	11.5	11.5	14.5
	142	5710	11.5	11.5	11.5	11.5	14.5
	106	5530	11.5	11.5	11.5	11.5	14.5
802.11ax HE160	122	5610	11.5	11.5	11.5	11.5	14.5
	138	5690	11.5	11.5	11.5	11.5	14.5
	114	5570	11.5	11.5	11.5	11.5	14.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11n HT20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11n HT40	151	5755	10.5	10.5	10.5	10.5	13.5
	159	5795	10.5	10.5	10.5	10.5	13.5
802.11ac VHT20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	151	5755	10.5	10.5	10.5	10.5	13.5
	159	5795	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	155	5775	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	151	5755	10.5	10.5	10.5	10.5	13.5
	159	5795	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	155	5775	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	11.0	11.0	11.0	11.0	14.0
	5	5975	11.0	11.0	11.0	11.0	14.0
	9	5995	11.0	11.0	11.0	11.0	14.0
	13	6015	11.0	11.0	11.0	11.0	14.0
	17	6035	11.0	11.0	11.0	11.0	14.0
	21	6055	11.0	11.0	11.0	11.0	14.0
	25	6075	11.0	11.0	11.0	11.0	14.0
	29	6095	11.0	11.0	11.0	11.0	14.0
	33	6115	11.0	11.0	11.0	11.0	14.0
	37	6135	11.0	11.0	11.0	11.0	14.0
	41	6155	11.0	11.0	11.0	11.0	14.0
	45	6175	11.0	11.0	11.0	11.0	14.0
	49	6195	11.0	11.0	11.0	11.0	14.0
	53	6215	11.0	11.0	11.0	11.0	14.0
	57	6235	11.0	11.0	11.0	11.0	14.0
	61	6255	11.0	11.0	11.0	11.0	14.0
	65	6275	11.0	11.0	11.0	11.0	14.0
	69	6295	11.0	11.0	11.0	11.0	14.0
	73	6315	11.0	11.0	11.0	11.0	14.0
	77	6335	11.0	11.0	11.0	11.0	14.0
	81	6355	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	85	6375	11.0	11.0	11.0	11.0	14.0
	89	6395	11.0	11.0	11.0	11.0	14.0
	93	6415	11.0	11.0	11.0	11.0	14.0
	1	5955	11.0	11.0	11.0	11.0	14.0
	5	5975	11.0	11.0	11.0	11.0	14.0
	9	5995	11.0	11.0	11.0	11.0	14.0
	13	6015	11.0	11.0	11.0	11.0	14.0
	17	6035	11.0	11.0	11.0	11.0	14.0
	21	6055	11.0	11.0	11.0	11.0	14.0
	25	6075	11.0	11.0	11.0	11.0	14.0
	29	6095	11.0	11.0	11.0	11.0	14.0
	33	6115	11.0	11.0	11.0	11.0	14.0
	37	6135	11.0	11.0	11.0	11.0	14.0
	41	6155	11.0	11.0	11.0	11.0	14.0
	45	6175	11.0	11.0	11.0	11.0	14.0
	49	6195	11.0	11.0	11.0	11.0	14.0
	53	6215	11.0	11.0	11.0	11.0	14.0
	57	6235	11.0	11.0	11.0	11.0	14.0
	61	6255	11.0	11.0	11.0	11.0	14.0
	65	6275	11.0	11.0	11.0	11.0	14.0
	69	6295	11.0	11.0	11.0	11.0	14.0
	73	6315	11.0	11.0	11.0	11.0	14.0
	77	6335	11.0	11.0	11.0	11.0	14.0
	81	6355	11.0	11.0	11.0	11.0	14.0
	85	6375	11.0	11.0	11.0	11.0	14.0
	89	6395	11.0	11.0	11.0	11.0	14.0
	93	6415	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	3	5965	10.5	10.5	10.5	10.5	13.5
	11	6005	10.5	10.5	10.5	10.5	13.5
	19	6045	10.5	10.5	10.5	10.5	13.5
	27	6085	10.5	10.5	10.5	10.5	13.5
	35	6125	10.5	10.5	10.5	10.5	13.5
	43	6165	10.5	10.5	10.5	10.5	13.5
	51	6205	10.5	10.5	10.5	10.5	13.5
	59	6245	10.5	10.5	10.5	10.5	13.5
	67	6285	10.5	10.5	10.5	10.5	13.5
	75	6325	10.5	10.5	10.5	10.5	13.5
	83	6365	10.5	10.5	10.5	10.5	13.5
	91	6405	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	7	5985	10.5	10.5	10.5	10.5	13.5
	23	6065	10.5	10.5	10.5	10.5	13.5
	39	6145	10.5	10.5	10.5	10.5	13.5
	55	6225	10.5	10.5	10.5	10.5	13.5
	71	6305	10.5	10.5	10.5	10.5	13.5
	87	6385	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	15	6025	10.5	10.5	10.5	10.5	13.5
	47	6185	10.5	10.5	10.5	10.5	13.5
	79	6345	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	11.0	11.0	11.0	11.0	14.0
	101	6455	11.0	11.0	11.0	11.0	14.0
	105	6475	11.0	11.0	11.0	11.0	14.0
	109	6495	11.0	11.0	11.0	11.0	14.0
	113	6515	11.0	11.0	11.0	11.0	14.0
	117	6535	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	97	6435	11.0	11.0	11.0	11.0	14.0
	101	6455	11.0	11.0	11.0	11.0	14.0
	105	6475	11.0	11.0	11.0	11.0	14.0
	109	6495	11.0	11.0	11.0	11.0	14.0
	113	6515	11.0	11.0	11.0	11.0	14.0
	117	6535	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	99	6445	10.5	10.5	10.5	10.5	13.5
	107	6485	10.5	10.5	10.5	10.5	13.5
	115	6525	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	103	6465	10.5	10.5	10.5	10.5	13.5
	119	6545	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	111	6505	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	121	6555	11.0	11.0	11.0	11.0	14.0
	125	6575	11.0	11.0	11.0	11.0	14.0
	129	6595	11.0	11.0	11.0	11.0	14.0
	133	6615	11.0	11.0	11.0	11.0	14.0
	137	6635	11.0	11.0	11.0	11.0	14.0
	141	6655	11.0	11.0	11.0	11.0	14.0
	145	6675	11.0	11.0	11.0	11.0	14.0
	149	6695	11.0	11.0	11.0	11.0	14.0
	153	6715	11.0	11.0	11.0	11.0	14.0
	157	6735	11.0	11.0	11.0	11.0	14.0
	161	6755	11.0	11.0	11.0	11.0	14.0
	165	6775	11.0	11.0	11.0	11.0	14.0
	169	6795	11.0	11.0	11.0	11.0	14.0
	173	6815	11.0	11.0	11.0	11.0	14.0
	177	6835	11.0	11.0	11.0	11.0	14.0
	181	6855	11.0	11.0	11.0	11.0	14.0
	185	6875	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	121	6555	11.0	11.0	11.0	11.0	14.0
	125	6575	11.0	11.0	11.0	11.0	14.0
	129	6595	11.0	11.0	11.0	11.0	14.0
	133	6615	11.0	11.0	11.0	11.0	14.0
	137	6635	11.0	11.0	11.0	11.0	14.0
	141	6655	11.0	11.0	11.0	11.0	14.0
	145	6675	11.0	11.0	11.0	11.0	14.0
	149	6695	11.0	11.0	11.0	11.0	14.0
	153	6715	11.0	11.0	11.0	11.0	14.0
	157	6735	11.0	11.0	11.0	11.0	14.0
	161	6755	11.0	11.0	11.0	11.0	14.0
	165	6775	11.0	11.0	11.0	11.0	14.0
	169	6795	11.0	11.0	11.0	11.0	14.0
	173	6815	11.0	11.0	11.0	11.0	14.0
	177	6835	11.0	11.0	11.0	11.0	14.0
	181	6855	11.0	11.0	11.0	11.0	14.0
	185	6875	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	123	6565	10.5	10.5	10.5	10.5	13.5
	131	6605	10.5	10.5	10.5	10.5	13.5
	139	6645	10.5	10.5	10.5	10.5	13.5
	147	6685	10.5	10.5	10.5	10.5	13.5
	155	6725	10.5	10.5	10.5	10.5	13.5
	163	6765	10.5	10.5	10.5	10.5	13.5
	171	6805	10.5	10.5	10.5	10.5	13.5
	179	6845	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	187	6885	10.5	10.5	10.5	10.5	13.5
	135	6625	10.5	10.5	10.5	10.5	13.5
	151	6705	10.5	10.5	10.5	10.5	13.5
	167	6785	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	183	6865	10.5	10.5	10.5	10.5	13.5
	143	6665	10.5	10.5	10.5	10.5	13.5
	175	6825	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 Sensor ON)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	11.0	11.0	11.0	11.0	14.0
	193	6915	11.0	11.0	11.0	11.0	14.0
	197	6935	11.0	11.0	11.0	11.0	14.0
	201	6955	11.0	11.0	11.0	11.0	14.0
	205	6975	11.0	11.0	11.0	11.0	14.0
	209	6995	11.0	11.0	11.0	11.0	14.0
	213	7015	11.0	11.0	11.0	11.0	14.0
	217	7035	11.0	11.0	11.0	11.0	14.0
	221	7055	11.0	11.0	11.0	11.0	14.0
	225	7075	11.0	11.0	11.0	11.0	14.0
	229	7095	11.0	11.0	11.0	11.0	14.0
	233	7115	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	189	6895	11.0	11.0	11.0	11.0	14.0
	193	6915	11.0	11.0	11.0	11.0	14.0
	197	6935	11.0	11.0	11.0	11.0	14.0
	201	6955	11.0	11.0	11.0	11.0	14.0
	205	6975	11.0	11.0	11.0	11.0	14.0
	209	6995	11.0	11.0	11.0	11.0	14.0
	213	7015	11.0	11.0	11.0	11.0	14.0
	217	7035	11.0	11.0	11.0	11.0	14.0
	221	7055	11.0	11.0	11.0	11.0	14.0
	225	7075	11.0	11.0	11.0	11.0	14.0
	229	7095	11.0	11.0	11.0	11.0	14.0
	233	7115	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	195	6925	10.5	10.5	10.5	10.5	13.5
	203	6965	10.5	10.5	10.5	10.5	13.5
	211	7005	10.5	10.5	10.5	10.5	13.5
	219	7045	10.5	10.5	10.5	10.5	13.5
	227	7085	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	199	6945	10.5	10.5	10.5	10.5	13.5
	215	7025	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	207	6985	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (QCNFA765 DBS ON)							
WLAN2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	16.5	18.0	16.5	16.5	19.5
	6	2437	16.5	19.0	16.5	16.5	19.5
	11	2462	16.5	18.0	16.5	16.5	19.5
	12	2467	16.5	17.0	16.5	16.5	19.5
	13	2472	14.5	14.5	14.5	14.5	17.5
802.11g	1	2412	16.0	16.0	16.0	16.0	19.0
	6	2437	16.5	19.0	16.5	16.5	19.5
	11	2462	16.5	16.5	16.5	16.5	19.5
	12	2467	14.5	14.5	14.5	14.5	17.5
	13	2472	2.5	2.5	2.5	2.5	5.5
802.11n HT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	16.5	18.0	16.5	16.5	19.5
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11n HT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ac VHT20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	16.5	18.0	16.5	16.5	19.5
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ac VHT40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0
802.11ax HE20	1	2412	14.5	14.5	14.5	14.5	17.5
	6	2437	16.5	18.0	16.5	16.5	19.5
	11	2462	13.5	13.5	13.5	13.5	16.5
	12	2467	12.0	12.0	12.0	12.0	15.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ax HE40	3	2422	13.0	13.0	13.0	13.0	16.0
	6	2437	14.5	14.5	14.5	14.5	17.5
	9	2452	13.5	13.5	13.5	13.5	16.5
	10	2457	11.0	11.0	11.0	11.0	14.0
	11	2462	4.0	4.0	4.0	4.0	7.0

WLAN Tune-up Power (QCNFA765 DBS ON)							
Bluetooth							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
BR / EDR	0	2402		16.0			
	39	2441		16.0			
	78	2480		16.0			
LE	0	2402		7.0			
	19	2440		7.0			
	39	2480		7.0			

WLAN Tune-up Power (QCNFA765 DBS ON)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11n HT20	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11n HT40	38	5190	9.5	9.5	9.5	9.5	12.5
	46	5230	9.5	9.5	9.5	9.5	12.5
802.11ac VHT20	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11ac VHT40	38	5190	9.5	9.5	9.5	9.5	12.5
	46	5230	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	42	5210	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	38	5190	9.5	9.5	9.5	9.5	12.5
	46	5230	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	42	5210	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (QCNFA765 DBS ON)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11n HT20	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11n HT40	54	5270	9.5	9.5	9.5	9.5	12.5
	62	5310	9.5	9.5	9.5	9.5	12.5
802.11ac VHT20	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11ac VHT40	54	5270	9.5	9.5	9.5	9.5	12.5
	62	5310	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ac VHT160	50	5250	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	54	5270	9.5	9.5	9.5	9.5	12.5
	62	5310	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ax HE160	50	5250	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (QCNFA765 DBS ON)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	10.0	10.0	10.0	10.0	13.0
	116	5580	10.0	10.0	10.0	10.0	13.0
	120	5600	10.0	10.0	10.0	10.0	13.0
	124	5620	10.0	10.0	10.0	10.0	13.0
	132	5660	10.0	10.0	10.0	10.0	13.0
	140	5700	10.0	10.0	10.0	10.0	13.0
802.11n HT20	144	5720	10.0	10.0	10.0	10.0	13.0
	100	5500	10.0	10.0	10.0	10.0	13.0
	116	5580	10.0	10.0	10.0	10.0	13.0
	120	5600	10.0	10.0	10.0	10.0	13.0
	124	5620	10.0	10.0	10.0	10.0	13.0
	132	5660	10.0	10.0	10.0	10.0	13.0
802.11n HT40	140	5700	10.0	10.0	10.0	10.0	13.0
	144	5720	10.0	10.0	10.0	10.0	13.0
	102	5510	9.5	9.5	9.5	9.5	12.5
	110	5550	9.5	9.5	9.5	9.5	12.5
	118	5590	9.5	9.5	9.5	9.5	12.5
	126	5630	9.5	9.5	9.5	9.5	12.5
802.11ac VHT20	134	5670	9.5	9.5	9.5	9.5	12.5
	142	5710	9.5	9.5	9.5	9.5	12.5
	100	5500	10.0	10.0	10.0	10.0	13.0
	116	5580	10.0	10.0	10.0	10.0	13.0
	120	5600	10.0	10.0	10.0	10.0	13.0
	124	5620	10.0	10.0	10.0	10.0	13.0
802.11ac VHT40	132	5660	10.0	10.0	10.0	10.0	13.0
	140	5700	10.0	10.0	10.0	10.0	13.0
	144	5720	10.0	10.0	10.0	10.0	13.0
	102	5510	9.5	9.5	9.5	9.5	12.5
	110	5550	9.5	9.5	9.5	9.5	12.5
	118	5590	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	126	5630	9.5	9.5	9.5	9.5	12.5
	134	5670	9.5	9.5	9.5	9.5	12.5
	142	5710	9.5	9.5	9.5	9.5	12.5
802.11ac VHT160	106	5530	9.5	9.5	9.5	9.5	12.5
	122	5610	9.5	9.5	9.5	9.5	12.5
	138	5690	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	114	5570	9.5	9.5	9.5	9.5	12.5
	100	5500	10.0	10.0	10.0	10.0	13.0
	116	5580	10.0	10.0	10.0	10.0	13.0
	120	5600	10.0	10.0	10.0	10.0	13.0
	124	5620	10.0	10.0	10.0	10.0	13.0
	132	5660	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	140	5700	10.0	10.0	10.0	10.0	13.0
	144	5720	10.0	10.0	10.0	10.0	13.0
	102	5510	9.5	9.5	9.5	9.5	12.5
	110	5550	9.5	9.5	9.5	9.5	12.5
	118	5590	9.5	9.5	9.5	9.5	12.5
	126	5630	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	134	5670	9.5	9.5	9.5	9.5	12.5
	142	5710	9.5	9.5	9.5	9.5	12.5
	106	5530	9.5	9.5	9.5	9.5	12.5
802.11ax HE160	122	5610	9.5	9.5	9.5	9.5	12.5
	138	5690	9.5	9.5	9.5	9.5	12.5
	114	5570	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (QCNFA765 DBS ON)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	9.0	9.0	9.0	9.0	12.0
	153	5765	9.0	9.0	9.0	9.0	12.0
	157	5785	9.0	9.0	9.0	9.0	12.0
	161	5805	9.0	9.0	9.0	9.0	12.0
	165	5825	9.0	9.0	9.0	9.0	12.0
802.11n HT20	149	5745	9.0	9.0	9.0	9.0	12.0
	153	5765	9.0	9.0	9.0	9.0	12.0
	157	5785	9.0	9.0	9.0	9.0	12.0
	161	5805	9.0	9.0	9.0	9.0	12.0
	165	5825	9.0	9.0	9.0	9.0	12.0
802.11n HT40	151	5755	8.5	8.5	8.5	8.5	11.5
	159	5795	8.5	8.5	8.5	8.5	11.5
802.11ac VHT20	149	5745	9.0	9.0	9.0	9.0	12.0
	153	5765	9.0	9.0	9.0	9.0	12.0
	157	5785	9.0	9.0	9.0	9.0	12.0
	161	5805	9.0	9.0	9.0	9.0	12.0
	165	5825	9.0	9.0	9.0	9.0	12.0
802.11ac VHT40	151	5755	8.5	8.5	8.5	8.5	11.5
	159	5795	8.5	8.5	8.5	8.5	11.5
802.11ac VHT80	155	5775	8.5	8.5	8.5	8.5	11.5
802.11ax HE20	149	5745	9.0	9.0	9.0	9.0	12.0
	153	5765	9.0	9.0	9.0	9.0	12.0
	157	5785	9.0	9.0	9.0	9.0	12.0
	161	5805	9.0	9.0	9.0	9.0	12.0
	165	5825	9.0	9.0	9.0	9.0	12.0
802.11ax HE40	151	5755	8.5	8.5	8.5	8.5	11.5
	159	5795	8.5	8.5	8.5	8.5	11.5
802.11ax HE80	155	5775	8.5	8.5	8.5	8.5	11.5

WLAN Tune-up Power (QCNFA765 DBS ON)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	7.5	7.5	7.5	7.5	10.5
	5	5975	7.5	7.5	7.5	7.5	10.5
	9	5995	7.5	7.5	7.5	7.5	10.5
	13	6015	7.5	7.5	7.5	7.5	10.5
	17	6035	7.5	7.5	7.5	7.5	10.5
	21	6055	7.5	7.5	7.5	7.5	10.5
	25	6075	7.5	7.5	7.5	7.5	10.5
	29	6095	7.5	7.5	7.5	7.5	10.5
	33	6115	7.5	7.5	7.5	7.5	10.5
	37	6135	7.5	7.5	7.5	7.5	10.5
	41	6155	7.5	7.5	7.5	7.5	10.5
	45	6175	7.5	7.5	7.5	7.5	10.5
	49	6195	7.5	7.5	7.5	7.5	10.5
	53	6215	7.5	7.5	7.5	7.5	10.5
	57	6235	7.5	7.5	7.5	7.5	10.5
	61	6255	7.5	7.5	7.5	7.5	10.5
	65	6275	7.5	7.5	7.5	7.5	10.5
	69	6295	7.5	7.5	7.5	7.5	10.5
	73	6315	7.5	7.5	7.5	7.5	10.5
	77	6335	7.5	7.5	7.5	7.5	10.5
	81	6355	7.5	7.5	7.5	7.5	10.5
802.11ax HE20	85	6375	7.5	7.5	7.5	7.5	10.5
	89	6395	7.5	7.5	7.5	7.5	10.5
	93	6415	7.5	7.5	7.5	7.5	10.5
	1	5955	7.5	7.5	7.5	7.5	10.5
	5	5975	7.5	7.5	7.5	7.5	10.5
	9	5995	7.5	7.5	7.5	7.5	10.5
	13	6015	7.5	7.5	7.5	7.5	10.5
	17	6035	7.5	7.5	7.5	7.5	10.5
	21	6055	7.5	7.5	7.5	7.5	10.5
	25	6075	7.5	7.5	7.5	7.5	10.5
	29	6095	7.5	7.5	7.5	7.5	10.5
	33	6115	7.5	7.5	7.5	7.5	10.5
	37	6135	7.5	7.5	7.5	7.5	10.5
	41	6155	7.5	7.5	7.5	7.5	10.5
	45	6175	7.5	7.5	7.5	7.5	10.5
	49	6195	7.5	7.5	7.5	7.5	10.5
	53	6215	7.5	7.5	7.5	7.5	10.5
	57	6235	7.5	7.5	7.5	7.5	10.5
	61	6255	7.5	7.5	7.5	7.5	10.5
	65	6275	7.5	7.5	7.5	7.5	10.5
	69	6295	7.5	7.5	7.5	7.5	10.5
	73	6315	7.5	7.5	7.5	7.5	10.5
	77	6335	7.5	7.5	7.5	7.5	10.5
	81	6355	7.5	7.5	7.5	7.5	10.5
	85	6375	7.5	7.5	7.5	7.5	10.5
	89	6395	7.5	7.5	7.5	7.5	10.5
	93	6415	7.5	7.5	7.5	7.5	10.5
802.11ax HE40	3	5965	7.0	7.0	7.0	7.0	10.0
	11	6005	7.0	7.0	7.0	7.0	10.0
	19	6045	7.0	7.0	7.0	7.0	10.0
	27	6085	7.0	7.0	7.0	7.0	10.0
	35	6125	7.0	7.0	7.0	7.0	10.0
	43	6165	7.0	7.0	7.0	7.0	10.0
	51	6205	7.0	7.0	7.0	7.0	10.0
	59	6245	7.0	7.0	7.0	7.0	10.0
	67	6285	7.0	7.0	7.0	7.0	10.0
	75	6325	7.0	7.0	7.0	7.0	10.0
802.11ax HE80	83	6365	7.0	7.0	7.0	7.0	10.0
	91	6405	7.0	7.0	7.0	7.0	10.0
	7	5985	7.0	7.0	7.0	7.0	10.0
	23	6065	7.0	7.0	7.0	7.0	10.0
	39	6145	7.0	7.0	7.0	7.0	10.0
802.11ax HE160	55	6225	7.0	7.0	7.0	7.0	10.0
	71	6305	7.0	7.0	7.0	7.0	10.0
	87	6385	7.0	7.0	7.0	7.0	10.0
	15	6025	7.0	7.0	7.0	7.0	10.0
	47	6185	7.0	7.0	7.0	7.0	10.0
	79	6345	7.0	7.0	7.0	7.0	10.0

WLAN Tune-up Power (QCNFA765 DBS ON)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	7.5	7.5	7.5	7.5	10.5
	101	6455	7.5	7.5	7.5	7.5	10.5
	105	6475	7.5	7.5	7.5	7.5	10.5
	109	6495	7.5	7.5	7.5	7.5	10.5
	113	6515	7.5	7.5	7.5	7.5	10.5
	117	6535	7.5	7.5	7.5	7.5	10.5
802.11ax HE20	97	6435	7.5	7.5	7.5	7.5	10.5
	101	6455	7.5	7.5	7.5	7.5	10.5
	105	6475	7.5	7.5	7.5	7.5	10.5
	109	6495	7.5	7.5	7.5	7.5	10.5
	113	6515	7.5	7.5	7.5	7.5	10.5
	117	6535	7.5	7.5	7.5	7.5	10.5
802.11ax HE40	99	6445	7.0	7.0	7.0	7.0	10.0
	107	6485	7.0	7.0	7.0	7.0	10.0
	115	6525	7.0	7.0	7.0	7.0	10.0
802.11ax HE80	103	6465	7.0	7.0	7.0	7.0	10.0
	119	6545	7.0	7.0	7.0	7.0	10.0
802.11ax HE160	111	6505	7.0	7.0	7.0	7.0	10.0

WLAN Tune-up Power (QCNFA765 DBS ON)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	121	6555	7.5	7.5	7.5	7.5	10.5
	125	6575	7.5	7.5	7.5	7.5	10.5
	129	6595	7.5	7.5	7.5	7.5	10.5
	133	6615	7.5	7.5	7.5	7.5	10.5
	137	6635	7.5	7.5	7.5	7.5	10.5
	141	6655	7.5	7.5	7.5	7.5	10.5
	145	6675	7.5	7.5	7.5	7.5	10.5
	149	6695	7.5	7.5	7.5	7.5	10.5
	153	6715	7.5	7.5	7.5	7.5	10.5
	157	6735	7.5	7.5	7.5	7.5	10.5
	161	6755	7.5	7.5	7.5	7.5	10.5
	165	6775	7.5	7.5	7.5	7.5	10.5
	169	6795	7.5	7.5	7.5	7.5	10.5
	173	6815	7.5	7.5	7.5	7.5	10.5
	177	6835	7.5	7.5	7.5	7.5	10.5
	181	6855	7.5	7.5	7.5	7.5	10.5
	185	6875	7.5	7.5	7.5	7.5	10.5
802.11ax HE20	121	6555	7.5	7.5	7.5	7.5	10.5
	125	6575	7.5	7.5	7.5	7.5	10.5
	129	6595	7.5	7.5	7.5	7.5	10.5
	133	6615	7.5	7.5	7.5	7.5	10.5
	137	6635	7.5	7.5	7.5	7.5	10.5
	141	6655	7.5	7.5	7.5	7.5	10.5
	145	6675	7.5	7.5	7.5	7.5	10.5
	149	6695	7.5	7.5	7.5	7.5	10.5
	153	6715	7.5	7.5	7.5	7.5	10.5
	157	6735	7.5	7.5	7.5	7.5	10.5
	161	6755	7.5	7.5	7.5	7.5	10.5
	165	6775	7.5	7.5	7.5	7.5	10.5
	169	6795	7.5	7.5	7.5	7.5	10.5
	173	6815	7.5	7.5	7.5	7.5	10.5
	177	6835	7.5	7.5	7.5	7.5	10.5
	181	6855	7.5	7.5	7.5	7.5	10.5
	185	6875	7.5	7.5	7.5	7.5	10.5
802.11ax HE40	123	6565	7.0	7.0	7.0	7.0	10.0
	131	6605	7.0	7.0	7.0	7.0	10.0
	139	6645	7.0	7.0	7.0	7.0	10.0
	147	6685	7.0	7.0	7.0	7.0	10.0
	155	6725	7.0	7.0	7.0	7.0	10.0
	163	6765	7.0	7.0	7.0	7.0	10.0
	171	6805	7.0	7.0	7.0	7.0	10.0
	179	6845	7.0	7.0	7.0	7.0	10.0
802.11ax HE80	187	6885	7.0	7.0	7.0	7.0	10.0
	135	6625	7.0	7.0	7.0	7.0	10.0
	151	6705	7.0	7.0	7.0	7.0	10.0
	167	6785	7.0	7.0	7.0	7.0	10.0
802.11ax HE160	183	6865	7.0	7.0	7.0	7.0	10.0
	143	6665	7.0	7.0	7.0	7.0	10.0
	175	6825	7.0	7.0	7.0	7.0	10.0

WLAN Tune-up Power (QCNFA765 DBS ON)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	7.5	7.5	7.5	7.5	10.5
	193	6915	7.5	7.5	7.5	7.5	10.5
	197	6935	7.5	7.5	7.5	7.5	10.5
	201	6955	7.5	7.5	7.5	7.5	10.5
	205	6975	7.5	7.5	7.5	7.5	10.5
	209	6995	7.5	7.5	7.5	7.5	10.5
	213	7015	7.5	7.5	7.5	7.5	10.5
	217	7035	7.5	7.5	7.5	7.5	10.5
	221	7055	7.5	7.5	7.5	7.5	10.5
	225	7075	7.5	7.5	7.5	7.5	10.5
	229	7095	7.5	7.5	7.5	7.5	10.5
	233	7115	7.5	7.5	7.5	7.5	10.5
802.11ax HE20	189	6895	7.5	7.5	7.5	7.5	10.5
	193	6915	7.5	7.5	7.5	7.5	10.5
	197	6935	7.5	7.5	7.5	7.5	10.5
	201	6955	7.5	7.5	7.5	7.5	10.5
	205	6975	7.5	7.5	7.5	7.5	10.5
	209	6995	7.5	7.5	7.5	7.5	10.5
	213	7015	7.5	7.5	7.5	7.5	10.5
	217	7035	7.5	7.5	7.5	7.5	10.5
	221	7055	7.5	7.5	7.5	7.5	10.5
	225	7075	7.5	7.5	7.5	7.5	10.5
	229	7095	7.5	7.5	7.5	7.5	10.5
	233	7115	7.5	7.5	7.5	7.5	10.5
802.11ax HE40	195	6925	7.0	7.0	7.0	7.0	10.0
	203	6965	7.0	7.0	7.0	7.0	10.0
	211	7005	7.0	7.0	7.0	7.0	10.0
	219	7045	7.0	7.0	7.0	7.0	10.0
	227	7085	7.0	7.0	7.0	7.0	10.0
802.11ax HE80	199	6945	7.0	7.0	7.0	7.0	10.0
	215	7025	7.0	7.0	7.0	7.0	10.0
802.11ax HE160	207	6985	7.0	7.0	7.0	7.0	10.0

Annex E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.9
	6	2437	18.91
	11	2462	17.88
	12	2467	16.97
	13	2472	14.4
802.11g	1	2412	15.82
	6	2437	18.83
	11	2462	16.19
	12	2467	14.32
	13	2472	2.18
802.11n HT20	1	2412	14.35
	6	2437	17.74
	11	2462	13.26
	12	2467	11.83
	13	2472	1.79
802.11n HT40	3	2422	12.74
	6	2437	14.22
	9	2452	13.28
	10	2457	10.73
	11	2462	3.83
802.11ac VHT20	1	2412	14.33
	6	2437	17.66
	11	2462	13.33
	12	2467	11.77
	13	2472	1.66
802.11ac VHT40	3	2422	12.68
	6	2437	14.29
	9	2452	13.3
	10	2457	10.77
	11	2462	3.83
802.11ax HE20	1	2412	14.2
	6	2437	17.84
	11	2462	13.16
	12	2467	11.73
	13	2472	1.78
802.11ax HE40	3	2422	12.67
	6	2437	14.29
	9	2452	13.24
	10	2457	10.79
	11	2462	3.83

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.98
	6	2437	18.96
	11	2462	17.77
	12	2467	16.99
	13	2472	14.41
802.11g	1	2412	15.82
	6	2437	18.68
	11	2462	16.16
	12	2467	14.15
	13	2472	2.26
802.11n HT20	1	2412	14.28
	6	2437	17.71
	11	2462	13.32
	12	2467	11.79
	13	2472	2.75
802.11n HT40	3	2422	12.71
	6	2437	14.2
	9	2452	13.3
	10	2457	10.85
	11	2462	3.73
802.11ac VHT20	1	2412	14.35
	6	2437	17.75
	11	2462	13.2
	12	2467	11.85
	13	2472	1.66
802.11ac VHT40	3	2422	12.79
	6	2437	14.22
	9	2452	13.18
	10	2457	10.73
	11	2462	3.71
802.11ax HE20	1	2412	14.26
	6	2437	17.8
	11	2462	13.26
	12	2467	11.65
	13	2472	1.82
802.11ax HE40	3	2422	12.74
	6	2437	14.28
	9	2452	13.2
	10	2457	10.72
	11	2462	3.82

WLAN Conducted Power (QCNA765 Sensor OFF)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	16.82	17.98	20.45
	6	2437	17.43	18.99	21.29
	11	2462	16.42	17.83	20.19
	12	2467	16.05	16.97	19.54
	13	2472	13.01	14.5	16.83
802.11g	1	2412	14.73	15.31	18.04
	6	2437	17.83	18.26	21.06
	11	2462	15.16	15.67	18.43
	12	2467	13.17	13.79	16.50
	13	2472	1.29	1.67	4.49
802.11n HT20	1	2412	13.29	13.83	16.58
	6	2437	16.75	17.33	20.06
	11	2462	12.25	12.67	15.48
	12	2467	10.84	11.35	14.11
	13	2472	0.79	1.33	4.08
802.11n HT40	3	2422	11.68	12.32	15.02
	6	2437	13.16	13.79	16.50
	9	2452	12.3	12.69	15.51
	10	2457	9.75	10.21	13.00
	11	2462	2.81	3.23	6.04
802.11ac VHT20	1	2412	13.33	13.72	16.54
	6	2437	16.73	17.18	19.97
	11	2462	12.23	12.74	15.50
	12	2467	10.85	11.27	14.08
	13	2472	0.67	1.27	3.99
802.11ac VHT40	3	2422	11.83	12.23	15.04
	6	2437	13.33	13.82	16.59
	9	2452	12.28	12.84	15.58
	10	2457	9.77	10.22	13.01
	11	2462	2.83	3.23	6.04
802.11ax HE20	1	2412	13.26	13.84	16.57
	6	2437	16.81	17.25	20.05
	11	2462	12.19	12.75	15.49
	12	2467	10.82	11.34	14.10
	13	2472	0.83	1.27	4.07
802.11ax HE40	3	2422	11.72	12.17	14.96
	6	2437	13.25	13.71	16.50
	9	2452	12.29	12.79	15.56
	10	2457	9.84	10.3	13.09
	11	2462	2.85	3.33	6.11

WLAN Conducted Power (QCNFA765 Sensor OFF)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	14.86
	39	2441	14.45
	78	2480	14.07
LE	0	2402	6.15
	19	2440	6.12
	39	2480	6.02

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	12.74
	40	5200	12.68
	44	5220	12.69
	48	5240	12.81
802.11n HT20	36	5180	12.65
	40	5200	12.8
	44	5220	12.73
	48	5240	12.74
802.11n HT40	38	5190	12.95
	46	5230	13.41
802.11ac VHT20	36	5180	12.74
	40	5200	12.84
	44	5220	12.79
	48	5240	12.69
802.11ac VHT40	38	5190	12.74
	46	5230	13.15
802.11ac VHT80	42	5210	10.71
802.11ax HE20	36	5180	12.85
	40	5200	12.77
	44	5220	12.84
	48	5240	12.81
802.11ax HE40	38	5190	12.7
	46	5230	13.2
802.11ax HE80	42	5210	10.75

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	12.75
	40	5200	12.99
	44	5220	12.98
	48	5240	12.78
802.11n HT20	36	5180	12.75
	40	5200	12.81
	44	5220	12.73
	48	5240	12.75
802.11n HT40	38	5190	12.16
	46	5230	12.18
802.11ac VHT20	36	5180	12.81
	40	5200	12.68
	44	5220	12.7
	48	5240	12.82
802.11ac VHT40	38	5190	12.28
	46	5230	12.16
802.11ac VHT80	42	5210	10.83
802.11ax HE20	36	5180	12.82
	40	5200	12.85
	44	5220	12.72
	48	5240	12.7
802.11ax HE40	38	5190	12.3
	46	5230	12.34
802.11ax HE80	42	5210	10.83

WLAN Conducted Power (QCNFA765 Sensor OFF)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	12.74	12.98	15.87
	40	5200	12.9	12.99	15.96
	44	5220	12.98	12.56	15.79
	48	5240	12.97	12.11	15.57
802.11n HT20	36	5180	12.73	12.85	15.8
	40	5200	12.79	12.7	15.76
	44	5220	12.85	12.68	15.78
	48	5240	12.85	12.76	15.82
802.11n HT40	38	5190	12.29	12.33	15.32
	46	5230	12.2	12.27	15.25
802.11ac VHT20	36	5180	12.75	12.76	15.77
	40	5200	12.71	12.71	15.72
	44	5220	12.85	12.74	15.81
	48	5240	12.85	12.75	15.81
802.11ac VHT40	38	5190	12.17	12.34	15.27
	46	5230	12.28	12.31	15.31
802.11ac VHT80	42	5210	10.83	10.66	13.76
802.11ax HE20	36	5180	12.82	12.69	15.77
	40	5200	12.81	12.65	15.74
	44	5220	12.78	12.65	15.73
	48	5240	12.8	12.81	15.82
802.11ax HE40	38	5190	12.31	12.24	15.29
	46	5230	12.31	12.16	15.25
802.11ax HE80	42	5210	10.74	10.77	13.77

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	14.4
	56	5280	17.49
	60	5300	17.38
	64	5320	14.49
802.11n HT20	52	5260	14.26
	56	5280	15.77
	60	5300	15.74
	64	5320	14.29
802.11n HT40	54	5270	15.3
	62	5310	13.69
802.11ac VHT20	52	5260	14.22
	56	5280	15.72
	60	5300	15.81
	64	5320	14.29
802.11ac VHT40	54	5270	15.25
	62	5310	13.71
802.11ac VHT80	58	5290	12.23
802.11ac VHT160	50	5250	10.76
802.11ax HE20	52	5260	14.33
	56	5280	15.65
	60	5300	15.67
	64	5320	14.23
802.11ax HE40	54	5270	15.24
	62	5310	13.84
802.11ax HE80	58	5290	12.23
802.11ax HE160	50	5250	10.72

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	12.93
	56	5280	12.99
	60	5300	12.95
	64	5320	12.92
802.11n HT20	52	5260	12.84
	56	5280	12.72
	60	5300	12.81
	64	5320	12.78
802.11n HT40	54	5270	12.2
	62	5310	12.15
802.11ac VHT20	52	5260	12.65
	56	5280	12.77
	60	5300	12.83
	64	5320	12.84
802.11ac VHT40	54	5270	12.15
	62	5310	12.28
802.11ac VHT80	58	5290	12.19
802.11ac VHT160	50	5250	10.69
802.11ax HE20	52	5260	12.72
	56	5280	12.76
	60	5300	12.7
	64	5320	12.83
802.11ax HE40	54	5270	12.25
	62	5310	12.15
802.11ax HE80	58	5290	12.16
802.11ax HE160	50	5250	10.76

WLAN Conducted Power (QCNFA765 Sensor OFF)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	12.98	12.45	15.73
	56	5280	12.96	12.51	15.75
	60	5300	12.99	11.88	15.48
	64	5320	12.98	11.52	15.32
802.11n HT20	52	5260	12.83	12.29	15.58
	56	5280	12.68	12.2	15.46
	60	5300	12.85	12.26	15.58
	64	5320	12.67	12.23	15.47
802.11n HT40	54	5270	12.15	11.66	14.92
	62	5310	12.3	11.75	15.04
802.11ac VHT20	52	5260	12.82	12.16	15.51
	56	5280	12.82	12.21	15.54
	60	5300	12.75	12.31	15.55
	64	5320	12.75	12.25	15.52
802.11ac VHT40	54	5270	12.25	11.83	15.06
	62	5310	12.2	11.83	15.03
802.11ac VHT80	58	5290	12.17	11.78	14.99
802.11ac VHT160	50	5250	10.81	10.33	13.59
802.11ax HE20	52	5260	12.75	12.2	15.49
	56	5280	12.66	12.32	15.5
	60	5300	12.72	12.28	15.52
	64	5320	12.81	12.23	15.54
802.11ax HE40	54	5270	12.33	11.79	15.08
	62	5310	12.32	11.69	15.03
802.11ax HE80	58	5290	12.22	11.66	14.96
802.11ax HE160	50	5250	10.77	10.28	13.54

WLAN Conducted Power (QCNA765 Sensor OFF)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	14.35
	116	5580	16.89
	120	5600	16.99
	124	5620	16.83
	132	5660	16.82
	140	5700	14.39
	144	5720	17.41
802.11n HT20	100	5500	14.22
	116	5580	15.74
	120	5600	15.85
	124	5620	15.83
	132	5660	15.81
	140	5700	14.17
	144	5720	15.65
802.11n HT40	102	5510	13.71
	110	5550	15.22
	118	5590	15.32
	126	5630	15.28
	134	5670	13.76
	142	5710	15.19
	100	5500	14.17
802.11ac VHT20	116	5580	15.78
	120	5600	15.82
	124	5620	15.75
	132	5660	15.65
	140	5700	14.18
	144	5720	15.82
	102	5510	13.73
802.11ac VHT40	110	5550	15.3
	118	5590	15.27
	126	5630	15.35
	134	5670	13.72
	142	5710	15.24
	106	5530	13.23
	122	5610	13.33
802.11ac VHT80	138	5690	14.85
	114	5570	12.15
	114	5570	12.15
802.11ax HE20	100	5500	14.17
	116	5580	15.77
	120	5600	15.75
	124	5620	15.79
	132	5660	15.72
	140	5700	14.25
	144	5720	15.85
802.11ax HE40	102	5510	13.77
	110	5550	15.2
	118	5590	15.26
	126	5630	15.35
	134	5670	13.72
	142	5710	15.32
	106	5530	13.29
802.11ax HE80	122	5610	13.17
	138	5690	14.7
	114	5570	12.22
802.11ax HE160	114	5570	12.22

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	11.98
	116	5580	11.94
	120	5600	11.96
	124	5620	11.87
	132	5660	11.99
	140	5700	11.79
	144	5720	11.97
802.11n HT20	100	5500	11.67
	116	5580	11.76
	120	5600	11.77
	124	5620	11.65
	132	5660	11.83
	140	5700	11.81
	144	5720	11.68
802.11n HT40	102	5510	11.15
	110	5550	11.33
	118	5590	11.18
	126	5630	11.34
	134	5670	11.25
	142	5710	11.21
802.11ac VHT20	100	5500	11.72
	116	5580	11.7
	120	5600	11.82
	124	5620	11.8
	132	5660	11.77
	140	5700	11.77
	144	5720	11.79
802.11ac VHT40	102	5510	11.21
	110	5550	11.18
	118	5590	11.27
	126	5630	11.23
	134	5670	11.27
	142	5710	11.15
802.11ac VHT80	106	5530	11.3
	122	5610	11.18
	138	5690	11.19
802.11ac VHT160	114	5570	11.17
802.11ax HE20	100	5500	11.69
	116	5580	11.66
	120	5600	11.75
	124	5620	11.73
	132	5660	11.73
	140	5700	11.78
	144	5720	11.76
802.11ax HE40	102	5510	11.23
	110	5550	11.22
	118	5590	11.33
	126	5630	11.16
	134	5670	11.31
	142	5710	11.24
802.11ax HE80	106	5530	11.24
	122	5610	11.26
	138	5690	11.33
802.11ax HE160	114	5570	11.19

WLAN Conducted Power (QCNFA765 Sensor OFF)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	10.31	11.99	14.24
	116	5580	10.65	11.98	14.38
	120	5600	11.18	11.99	14.61
	124	5620	11.55	11.84	14.71
	132	5660	11.99	11.49	14.76
	140	5700	11.97	10.12	14.15
802.11n HT20	144	5720	11.82	10.07	14.04
	100	5500	11.1	11.18	14.15
	116	5580	11.03	11.14	14.1
	120	5600	11.1	11.17	14.15
	124	5620	11.18	11.02	14.11
	132	5660	11.09	11.03	14.07
802.11n HT40	140	5700	11.15	11.09	14.13
	144	5720	11.15	11.06	14.12
	102	5510	10.64	10.7	13.68
	110	5550	10.59	10.57	13.59
	118	5590	10.53	10.59	13.57
	126	5630	10.63	10.59	13.62
802.11ac VHT20	134	5670	10.65	10.66	13.67
	142	5710	10.58	10.65	13.63
	100	5500	11.12	11.12	14.13
	116	5580	11.18	11.2	14.2
	120	5600	11.03	11.12	14.09
	124	5620	11.04	11.06	14.06
802.11ac VHT40	132	5660	11.18	11.11	14.16
	140	5700	11.01	11.03	14.03
	144	5720	11.1	11.12	14.12
	102	5510	10.69	10.7	13.71
	110	5550	10.55	10.54	13.56
	118	5590	10.67	10.51	13.6
802.11ac VHT80	126	5630	10.58	10.69	13.65
	134	5670	10.52	10.63	13.59
	142	5710	10.52	10.6	13.57
	106	5530	10.52	10.52	13.53
802.11ac VHT160	122	5610	10.66	10.54	13.61
	138	5690	10.7	10.58	13.65
	114	5570	10.69	10.53	13.62
802.11ax HE20	100	5500	11.06	11.18	14.13
	116	5580	11.17	11.19	14.19
	120	5600	11.1	11.08	14.1
	124	5620	11.07	11.03	14.06
	132	5660	11.2	11.06	14.14
	140	5700	11.11	11.04	14.09
802.11ax HE40	144	5720	11.04	11.2	14.13
	102	5510	10.68	10.59	13.65
	110	5550	10.66	10.69	13.69
	118	5590	10.67	10.54	13.62
	126	5630	10.61	10.6	13.62
	134	5670	10.66	10.61	13.65
802.11ax HE80	142	5710	10.53	10.52	13.54
	106	5530	10.67	10.55	13.62
	122	5610	10.63	10.52	13.59
802.11ax HE160	138	5690	10.65	10.69	13.68
	114	5570	10.69	10.6	13.66

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	17.35
	153	5765	17.33
	157	5785	17.49
	161	5805	17.48
	165	5825	17.46
802.11n HT20	149	5745	15.76
	153	5765	15.74
	157	5785	15.7
	161	5805	15.78
	165	5825	15.67
802.11n HT40	151	5755	15.2
	159	5795	15.34
802.11ac VHT20	149	5745	15.78
	153	5765	15.79
	157	5785	15.77
	161	5805	15.84
	165	5825	15.7
802.11ac VHT40	151	5755	15.32
	159	5795	15.23
802.11ac VHT80	155	5775	14.67
802.11ax HE20	149	5745	15.69
	153	5765	15.67
	157	5785	15.85
	161	5805	15.66
	165	5825	15.79
802.11ax HE40	151	5755	15.15
	159	5795	15.24
802.11ax HE80	155	5775	14.65

WLAN Conducted Power (QCNFA765 Sensor OFF)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	10.72
	153	5765	10.71
	157	5785	10.99
	161	5805	10.96
	165	5825	10.98
802.11n HT20	149	5745	10.83
	153	5765	10.8
	157	5785	10.73
	161	5805	10.68
	165	5825	10.71
802.11n HT40	151	5755	10.28
	159	5795	10.24
802.11ac VHT20	149	5745	10.79
	153	5765	10.68
	157	5785	10.7
	161	5805	10.79
	165	5825	10.83
802.11ac VHT40	151	5755	10.35
	159	5795	10.33
802.11ac VHT80	155	5775	10.17
802.11ax HE20	149	5745	10.79
	153	5765	10.68
	157	5785	10.71
	161	5805	10.84
	165	5825	10.68
802.11ax HE40	151	5755	10.34
	159	5795	10.21
802.11ax HE80	155	5775	10.3

WLAN Conducted Power (QCNFA765 Sensor OFF)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	10.99	9.31	13.24
	153	5765	10.98	9.09	13.15
	157	5785	10.98	9.67	13.38
	161	5805	10.99	9.51	13.32
	165	5825	10.97	9.55	13.33
802.11n HT20	149	5745	10.17	10.23	13.21
	153	5765	10.16	10.08	13.13
	157	5785	10.24	10.23	13.25
	161	5805	10.22	10.19	13.22
	165	5825	10.12	10.05	13.1
802.11n HT40	151	5755	9.57	9.68	12.64
	159	5795	9.6	9.57	12.6
802.11ac VHT20	149	5745	10.21	10.23	13.23
	153	5765	10.22	10.08	13.16
	157	5785	10.09	10.22	13.17
	161	5805	10.14	10.07	13.12
	165	5825	10.25	10.24	13.26
802.11ac VHT40	151	5755	9.71	9.58	12.66
	159	5795	9.62	9.75	12.7
802.11ac VHT80	155	5775	9.59	9.61	12.61
802.11ax HE20	149	5745	10.08	10.25	13.18
	153	5765	10.07	10.25	13.17
	157	5785	10.24	10.12	13.19
	161	5805	10.12	10.11	13.13
	165	5825	10.1	10.17	13.15
802.11ax HE40	151	5755	9.67	9.6	12.65
	159	5795	9.55	9.66	12.62
802.11ax HE80	155	5775	9.62	9.61	12.63

WLAN Conducted Power (QCNA765 Sensor OFF)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	17.29
	5	5975	17.19
	9	5995	17.24
	13	6015	17.29
	17	6035	17.22
	21	6055	17.19
	25	6075	17.27
	29	6095	17.28
	33	6115	17.28
	37	6135	17.18
	41	6155	17.29
	45	6175	17.25
	49	6195	17.19
	53	6215	17.34
	57	6235	17.31
	61	6255	17.19
	65	6275	17.18
	69	6295	17.23
	73	6315	17.16
	77	6335	17.33
802.11ax HE20	81	6355	17.3
	85	6375	17.26
	89	6395	17.33
	93	6415	17.29
	1	5955	14.2
	5	5975	14.34
	9	5995	14.21
	13	6015	14.26
	17	6035	14.31
	21	6055	14.29
	25	6075	14.31
	29	6095	14.24
	33	6115	14.33
	37	6135	14.21
	41	6155	14.15
	45	6175	14.35
	49	6195	14.2
	53	6215	14.15
	57	6235	14.29
	61	6255	14.21
802.11ax HE40	65	6275	14.15
	69	6295	14.28
	73	6315	14.27
	77	6335	14.24
	81	6355	14.17
	85	6375	14.23
	89	6395	14.24
	93	6415	14.34
	3	5965	13.71
	11	6005	13.78
	19	6045	13.72
	27	6085	13.76
802.11ax HE80	35	6125	13.65
	43	6165	13.78
	51	6205	13.82
	59	6245	13.84
	67	6285	13.7
	75	6325	13.85
	83	6365	13.72
	91	6405	13.7
802.11ax HE160	7	5985	13.21
	23	6065	13.23
	39	6145	13.27
	55	6225	13.19
	71	6305	13.27
	87	6385	13.25
	15	6025	12.68
	47	6185	12.76
	79	6345	12.7

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	10.85
	5	5975	10.73
	9	5995	10.75
	13	6015	10.67
	17	6035	10.79
	21	6055	10.68
	25	6075	10.75
	29	6095	10.81
	33	6115	10.67
	37	6135	10.8
	41	6155	10.76
	45	6175	10.79
	49	6195	10.74
	53	6215	10.69
	57	6235	10.79
	61	6255	10.82
	65	6275	10.71
	69	6295	10.67
	73	6315	10.81
	77	6335	10.68
	81	6355	10.72
	85	6375	10.77
	89	6395	10.75
	93	6415	10.68
802.11ax HE20	1	5955	10.8
	5	5975	10.8
	9	5995	10.7
	13	6015	10.8
	17	6035	10.76
	21	6055	10.77
	25	6075	10.74
	29	6095	10.84
	33	6115	10.65
	37	6135	10.74
	41	6155	10.76
	45	6175	10.71
	49	6195	10.66
	53	6215	10.72
	57	6235	10.7
	61	6255	10.82
	65	6275	10.84
	69	6295	10.74
	73	6315	10.69
	77	6335	10.66
	81	6355	10.84
	85	6375	10.75
	89	6395	10.81
	93	6415	10.72
802.11ax HE40	3	5965	10.3
	11	6005	10.32
	19	6045	10.22
	27	6085	10.15
	35	6125	10.22
	43	6165	10.23
	51	6205	10.27
	59	6245	10.28
	67	6285	10.24
	75	6325	10.24
802.11ax HE80	83	6365	10.3
	91	6405	10.33
	7	5985	10.2
	23	6065	10.29
	39	6145	10.32
802.11ax HE160	55	6225	10.2
	71	6305	10.23
	87	6385	10.25
	15	6025	10.19
	47	6185	10.3
	79	6345	10.29

WLAN Conducted Power (QCNA765 Sensor OFF)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	10.05	10.02	13.05
	5	5975	10.1	10.06	13.09
	9	5995	10.19	10.02	13.12
	13	6015	10.14	10	13.08
	17	6035	10.17	10.16	13.18
	21	6055	10.1	10.1	13.11
	25	6075	10.05	10.13	13.1
	29	6095	10.18	10.14	13.17
	33	6115	10	10.12	13.07
	37	6135	10.2	10.2	13.21
	41	6155	10.05	10.18	13.13
	45	6175	10.16	10.13	13.16
	49	6195	10.04	10.09	13.08
	53	6215	10.2	10.1	13.16
	57	6235	10	10.16	13.09
	61	6255	10.12	10.17	13.16
	65	6275	10.15	10.09	13.13
	69	6295	10.18	10.02	13.11
	73	6315	10.07	10.18	13.14
	77	6335	10.2	10.11	13.17
802.11ax HE20	81	6355	10	10.02	13.02
	85	6375	10.12	10	13.07
	89	6395	10.1	10.04	13.08
	93	6415	10.19	10.01	13.11
	1	5955	10.16	10.01	13.1
	5	5975	10.15	10.02	13.1
	9	5995	10.15	10.16	13.17
	13	6015	10.12	10.17	13.16
	17	6035	10.02	10.13	13.09
	21	6055	10.19	10.09	13.15
	25	6075	10.14	10.13	13.15
	29	6095	10.13	10.09	13.12
	33	6115	10.05	10.03	13.05
	37	6135	10.05	10.02	13.05
	41	6155	10.04	10.04	13.05
	45	6175	10.1	10.18	13.15
	49	6195	10.05	10.06	13.07
	53	6215	10.06	10.05	13.07
	57	6235	10.16	10.2	13.19
	61	6255	10.17	10.18	13.19
802.11ax HE40	65	6275	10.09	10.09	13.1
	69	6295	10.15	10.06	13.12
	73	6315	10.06	10.19	13.14
	77	6335	10.16	10.04	13.11
	81	6355	10.18	10.01	13.11
	85	6375	10.11	10.08	13.11
	89	6395	10.1	10.07	13.1
	93	6415	10.08	10.16	13.13
	3	5965	9.56	9.67	12.63
	11	6005	9.67	9.55	12.62
	19	6045	9.6	9.52	12.57
	27	6085	9.6	9.7	12.66
802.11ax HE80	35	6125	9.7	9.68	12.7
	43	6165	9.54	9.57	12.57
	51	6205	9.65	9.68	12.68
	59	6245	9.69	9.64	12.68
	67	6285	9.51	9.67	12.6
	75	6325	9.7	9.59	12.66
	83	6365	9.69	9.52	12.62
	91	6405	9.57	9.55	12.57
	7	5985	9.54	9.64	12.6
	23	6065	9.57	9.65	12.62
802.11ax HE160	39	6145	9.51	9.54	12.54
	55	6225	9.65	9.5	12.59
	71	6305	9.51	9.52	12.53
	87	6385	9.65	9.61	12.64
	15	6025	10.23	10.3	13.28
	47	6185	10.15	10.34	13.26
	79	6345	10.22	10.23	13.24

WLAN Conducted Power (QCFA765 Sensor OFF)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	10.68
	101	6455	10.66
	105	6475	10.85
	109	6495	10.74
	113	6515	10.7
	117	6535	10.67
802.11ax HE20	97	6435	10.67
	101	6455	10.74
	105	6475	10.84
	109	6495	10.76
	113	6515	10.72
	117	6535	10.77
802.11ax HE40	99	6445	10.18
	107	6485	10.32
	115	6525	10.24
802.11ax HE80	103	6465	10.19
	119	6545	10.24
802.11ax HE160	111	6505	10.35

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	10.73
	101	6455	10.93
	105	6475	10.82
	109	6495	10.79
	113	6515	10.73
	117	6535	10.92
802.11ax HE20	97	6435	10.71
	101	6455	10.74
	105	6475	10.85
	109	6495	10.84
	113	6515	10.76
	117	6535	10.66
802.11ax HE40	99	6445	10.16
	107	6485	10.21
	115	6525	10.16
802.11ax HE80	103	6465	10.15
	119	6545	10.25
802.11ax HE160	111	6505	10.22

WLAN Conducted Power (QCNFA765 Sensor OFF)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	10.58	10.66	13.63
	101	6455	10.6	10.95	13.79
	105	6475	10.53	10.65	13.6
	109	6495	10.65	10.64	13.66
	113	6515	10.66	10.63	13.66
802.11ax HE20	117	6535	10.57	10.57	13.58
	97	6435	10.61	10.6	13.62
	101	6455	10.6	10.54	13.58
	105	6475	10.58	10.51	13.56
	109	6495	10.62	10.56	13.6
802.11ax HE40	113	6515	10.67	10.66	13.68
	117	6535	10.59	10.56	13.59
	99	6445	10.06	10.14	13.11
	107	6485	10.03	10.07	13.06
	115	6525	10	10.17	13.1
802.11ax HE80	103	6465	10.06	10.19	13.14
	119	6545	10.01	10.2	13.12
802.11ax HE160	111	6505	10.01	10.2	13.12

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	121	6555	17.42
	125	6575	17.39
	129	6595	17.42
	133	6615	17.38
	137	6635	17.42
	141	6655	17.37
	145	6675	17.45
	149	6695	17.33
	153	6715	17.42
	157	6735	17.41
	161	6755	17.42
	165	6775	17.35
	169	6795	17.36
	173	6815	17.38
	177	6835	17.33
	181	6855	17.34
802.11ax HE20	185	6875	17.3
	121	6555	14.21
	125	6575	14.25
	129	6595	14.25
	133	6615	14.29
	137	6635	14.19
	141	6655	14.21
	145	6675	14.28
	149	6695	14.33
	153	6715	14.15
	157	6735	14.33
	161	6755	14.26
	165	6775	14.25
	169	6795	14.23
	173	6815	14.15
	177	6835	14.24
802.11ax HE40	181	6855	14.17
	185	6875	14.26
	123	6565	13.77
	131	6605	13.82
	139	6645	13.74
	147	6685	13.78
	155	6725	13.83
	163	6765	13.72
802.11ax HE80	171	6805	13.77
	179	6845	13.7
	187	6885	13.75
	135	6625	13.17
802.11ax HE160	151	6705	13.35
	167	6785	13.17
	183	6865	13.15
	143	6665	12.78
	175	6825	12.71

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	121	6555	10.75
	125	6575	10.72
	129	6595	10.8
	133	6615	10.66
	137	6635	10.65
	141	6655	10.84
	145	6675	10.7
	149	6695	10.75
	153	6715	10.68
	157	6735	10.83
	161	6755	10.82
	165	6775	10.83
	169	6795	10.81
	173	6815	10.83
	177	6835	10.84
	181	6855	10.76
	185	6875	10.85
802.11ax HE20	121	6555	10.82
	125	6575	10.68
	129	6595	10.84
	133	6615	10.79
	137	6635	10.74
	141	6655	10.84
	145	6675	10.78
	149	6695	10.72
	153	6715	10.66
	157	6735	10.84
	161	6755	10.73
	165	6775	10.73
	169	6795	10.8
	173	6815	10.69
	177	6835	10.78
	181	6855	10.66
	185	6875	10.81
802.11ax HE40	123	6565	10.26
	131	6605	10.18
	139	6645	10.21
	147	6685	10.35
	155	6725	10.25
	163	6765	10.29
	171	6805	10.26
	179	6845	10.35
802.11ax HE80	187	6885	10.34
	135	6625	10.16
	151	6705	10.17
	167	6785	10.23
802.11ax HE160	183	6865	10.16
	143	6665	10.2
	175	6825	10.16

WLAN Conducted Power (QCNFA765 Sensor OFF)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	121	6555	10.07	10.09	13.09
	125	6575	10.13	10.2	13.18
	129	6595	10.13	10.03	13.09
	133	6615	10.13	10.12	13.14
	137	6635	10.08	10.07	13.09
	141	6655	10.14	10.04	13.1
	145	6675	10.08	10.08	13.09
	149	6695	10.2	10.09	13.16
	153	6715	10.13	10.04	13.1
	157	6735	10.16	10.1	13.14
	161	6755	10.08	10.02	13.06
	165	6775	10.17	10.1	13.15
	169	6795	10	10.05	13.04
	173	6815	10.13	10.07	13.11
	177	6835	10.02	10.1	13.07
	181	6855	10.16	10.1	13.14
	185	6875	10.03	10	13.03
802.11ax HE20	121	6555	10.03	10.18	13.12
	125	6575	10.12	10.2	13.17
	129	6595	10.17	10.14	13.17
	133	6615	10.13	10.15	13.15
	137	6635	10.16	10.07	13.13
	141	6655	10.11	10.02	13.08
	145	6675	10.16	10.05	13.12
	149	6695	10.16	10.15	13.17
	153	6715	10.04	10.1	13.08
	157	6735	10.12	10.14	13.14
	161	6755	10.11	10.2	13.17
	165	6775	10.2	10.01	13.12
	169	6795	10.14	10.18	13.17
	173	6815	10.01	10.12	13.08
	177	6835	10.12	10.07	13.11
	181	6855	10.06	10.09	13.09
	185	6875	10.13	10.19	13.17
802.11ax HE40	123	6565	9.67	9.54	12.62
	131	6605	9.57	9.69	12.64
	139	6645	9.61	9.7	12.67
	147	6685	9.6	9.54	12.58
	155	6725	9.55	9.55	12.56
	163	6765	9.66	9.58	12.63
	171	6805	9.61	9.53	12.58
	179	6845	9.62	9.65	12.65
802.11ax HE80	187	6885	9.58	9.64	12.62
	135	6625	9.67	9.56	12.63
	151	6705	9.55	9.58	12.58
	167	6785	9.63	9.7	12.68
802.11ax HE160	183	6865	9.6	9.63	12.63
	143	6665	9.52	9.68	12.61
	175	6825	9.59	9.64	12.63

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	10.75
	193	6915	10.65
	197	6935	10.67
	201	6955	10.68
	205	6975	10.71
	209	6995	10.82
	213	7015	10.67
	217	7035	10.74
	221	7055	10.83
	225	7075	10.76
	229	7095	10.72
	233	7115	10.65
802.11ax HE20	189	6895	10.66
	193	6915	10.76
	197	6935	10.71
	201	6955	10.73
	205	6975	10.85
	209	6995	10.68
	213	7015	10.84
	217	7035	10.84
	221	7055	10.84
	225	7075	10.77
	229	7095	10.77
	233	7115	10.83
802.11ax HE40	195	6925	10.2
	203	6965	10.34
	211	7005	10.22
	219	7045	10.34
	227	7085	10.3
802.11ax HE80	199	6945	10.17
	215	7025	10.17
802.11ax HE160	207	6985	10.16

WLAN Conducted Power (QCNFA765 Sensor OFF)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	10.66
	193	6915	10.8
	197	6935	10.65
	201	6955	10.67
	205	6975	10.81
	209	6995	10.66
	213	7015	10.85
	217	7035	10.71
	221	7055	10.79
	225	7075	10.73
	229	7095	10.65
	233	7115	10.73
802.11ax HE20	189	6895	10.67
	193	6915	10.83
	197	6935	10.69
	201	6955	10.72
	205	6975	10.75
	209	6995	10.75
	213	7015	10.82
	217	7035	10.82
	221	7055	10.84
	225	7075	10.84
	229	7095	10.71
	233	7115	10.75
802.11ax HE40	195	6925	10.3
	203	6965	10.33
	211	7005	10.3
	219	7045	10.23
	227	7085	10.33
802.11ax HE80	199	6945	10.35
	215	7025	10.3
802.11ax HE160	207	6985	10.25

WLAN Conducted Power (QCNTA765 Sensor OFF)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	10.18	10.2	13.2
	193	6915	10.14	10.05	13.11
	197	6935	10.07	10.15	13.12
	201	6955	10.17	10.06	13.13
	205	6975	10.06	10.2	13.14
	209	6995	10.18	10.18	13.19
	213	7015	10.03	10.09	13.07
	217	7035	10.15	10.06	13.12
	221	7055	10.15	10.2	13.19
	225	7075	10.1	10.08	13.1
	229	7095	10.08	10.17	13.14
	233	7115	10.03	10.2	13.13
802.11ax HE20	189	6895	10.2	10.14	13.18
	193	6915	10.08	10.14	13.12
	197	6935	10.18	10.06	13.13
	201	6955	10.18	10.18	13.19
	205	6975	10.15	10.02	13.1
	209	6995	10.2	10.04	13.13
	213	7015	10.04	10.03	13.05
	217	7035	10.09	10.09	13.1
	221	7055	10.1	10.15	13.14
	225	7075	10.04	10.08	13.07
	229	7095	10.08	10.15	13.13
	233	7115	10.1	10.16	13.14
802.11ax HE40	195	6925	9.53	9.5	12.53
	203	6965	9.7	9.53	12.63
	211	7005	9.61	9.54	12.59
	219	7045	9.57	9.59	12.59
	227	7085	9.6	9.54	12.58
802.11ax HE80	199	6945	9.59	9.61	12.61
	215	7025	9.68	9.62	12.66
802.11ax HE160	207	6985	9.56	9.61	12.6

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.9
	6	2437	18.91
	11	2462	17.88
	12	2467	16.97
	13	2472	14.4
802.11g	1	2412	15.82
	6	2437	18.83
	11	2462	16.19
	12	2467	14.32
	13	2472	2.18
802.11n HT20	1	2412	14.35
	6	2437	17.74
	11	2462	13.26
	12	2467	11.83
	13	2472	1.79
802.11n HT40	3	2422	12.74
	6	2437	14.22
	9	2452	13.28
	10	2457	10.73
	11	2462	3.83
802.11ac VHT20	1	2412	14.33
	6	2437	17.66
	11	2462	13.33
	12	2467	11.77
	13	2472	1.66
802.11ac VHT40	3	2422	12.68
	6	2437	14.29
	9	2452	13.3
	10	2457	10.77
	11	2462	3.83
802.11ax HE20	1	2412	14.2
	6	2437	17.84
	11	2462	13.16
	12	2467	11.73
	13	2472	1.78
802.11ax HE40	3	2422	12.67
	6	2437	14.29
	9	2452	13.24
	10	2457	10.79
	11	2462	3.83

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.98
	6	2437	18.96
	11	2462	17.77
	12	2467	16.99
	13	2472	14.41
802.11g	1	2412	15.82
	6	2437	18.68
	11	2462	16.16
	12	2467	14.15
	13	2472	2.26
802.11n HT20	1	2412	14.28
	6	2437	17.71
	11	2462	13.32
	12	2467	11.79
	13	2472	2.75
802.11n HT40	3	2422	12.71
	6	2437	14.2
	9	2452	13.3
	10	2457	10.85
	11	2462	3.73
802.11ac VHT20	1	2412	14.35
	6	2437	17.75
	11	2462	13.2
	12	2467	11.85
	13	2472	1.66
802.11ac VHT40	3	2422	12.79
	6	2437	14.22
	9	2452	13.18
	10	2457	10.73
	11	2462	3.71
802.11ax HE20	1	2412	14.26
	6	2437	17.8
	11	2462	13.26
	12	2467	11.65
	13	2472	1.82
802.11ax HE40	3	2422	12.74
	6	2437	14.28
	9	2452	13.2
	10	2457	10.72
	11	2462	3.82

WLAN Conducted Power (QCNFA765 Sensor ON)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	16.82	17.98	20.45
	6	2437	17.43	18.99	21.29
	11	2462	16.42	17.83	20.19
	12	2467	16.05	16.97	19.54
	13	2472	13.01	14.5	16.83
802.11g	1	2412	14.73	15.31	18.04
	6	2437	17.83	18.26	21.06
	11	2462	15.16	15.67	18.43
	12	2467	13.17	13.79	16.50
	13	2472	1.29	1.67	4.49
802.11n HT20	1	2412	13.29	13.83	16.58
	6	2437	16.75	17.33	20.06
	11	2462	12.25	12.67	15.48
	12	2467	10.84	11.35	14.11
	13	2472	0.79	1.33	4.08
802.11n HT40	3	2422	11.68	12.32	15.02
	6	2437	13.16	13.79	16.50
	9	2452	12.3	12.69	15.51
	10	2457	9.75	10.21	13.00
	11	2462	2.81	3.23	6.04
802.11ac VHT20	1	2412	13.33	13.72	16.54
	6	2437	16.73	17.18	19.97
	11	2462	12.23	12.74	15.50
	12	2467	10.85	11.27	14.08
	13	2472	0.67	1.27	3.99
802.11ac VHT40	3	2422	11.83	12.23	15.04
	6	2437	13.33	13.82	16.59
	9	2452	12.28	12.84	15.58
	10	2457	9.77	10.22	13.01
	11	2462	2.83	3.23	6.04
802.11ax HE20	1	2412	13.26	13.84	16.57
	6	2437	16.81	17.25	20.05
	11	2462	12.19	12.75	15.49
	12	2467	10.82	11.34	14.10
	13	2472	0.83	1.27	4.07
802.11ax HE40	3	2422	11.72	12.17	14.96
	6	2437	13.25	13.71	16.50
	9	2452	12.29	12.79	15.56
	10	2457	9.84	10.3	13.09
	11	2462	2.85	3.33	6.11

WLAN Conducted Power (QCNFA765 Sensor ON)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	14.86
	39	2441	14.45
	78	2480	14.07
LE	0	2402	6.15
	19	2440	6.12
	39	2480	6.02

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	12.75
	40	5200	12.99
	44	5220	12.78
	48	5240	12.98
802.11n HT20	36	5180	12.7
	40	5200	12.67
	44	5220	12.76
	48	5240	12.7
802.11n HT40	38	5190	12.25
	46	5230	12.17
802.11ac VHT20	36	5180	12.67
	40	5200	12.84
	44	5220	12.78
	48	5240	12.77
802.11ac VHT40	38	5190	12.31
	46	5230	12.15
802.11ac VHT80	42	5210	10.73
802.11ax HE20	36	5180	12.72
	40	5200	12.8
	44	5220	12.67
	48	5240	12.75
802.11ax HE40	38	5190	12.32
	46	5230	12.26
802.11ax HE80	42	5210	10.68

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	12.75
	40	5200	12.99
	44	5220	12.98
	48	5240	12.78
802.11n HT20	36	5180	12.75
	40	5200	12.81
	44	5220	12.73
	48	5240	12.75
802.11n HT40	38	5190	12.16
	46	5230	12.18
802.11ac VHT20	36	5180	12.81
	40	5200	12.68
	44	5220	12.7
	48	5240	12.82
802.11ac VHT40	38	5190	12.28
	46	5230	12.16
802.11ac VHT80	42	5210	10.83
802.11ax HE20	36	5180	12.82
	40	5200	12.85
	44	5220	12.72
	48	5240	12.7
802.11ax HE40	38	5190	12.3
	46	5230	12.34
802.11ax HE80	42	5210	10.83

WLAN Conducted Power (QCNFA765 Sensor ON)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	12.74	12.98	15.87
	40	5200	12.9	12.99	15.96
	44	5220	12.98	12.56	15.79
	48	5240	12.97	12.11	15.57
802.11n HT20	36	5180	12.73	12.85	15.8
	40	5200	12.79	12.7	15.76
	44	5220	12.85	12.68	15.78
	48	5240	12.85	12.76	15.82
802.11n HT40	38	5190	12.29	12.33	15.32
	46	5230	12.2	12.27	15.25
802.11ac VHT20	36	5180	12.75	12.76	15.77
	40	5200	12.71	12.71	15.72
	44	5220	12.85	12.74	15.81
	48	5240	12.85	12.75	15.81
802.11ac VHT40	38	5190	12.17	12.34	15.27
	46	5230	12.28	12.31	15.31
802.11ac VHT80	42	5210	10.83	10.66	13.76
802.11ax HE20	36	5180	12.82	12.69	15.77
	40	5200	12.81	12.65	15.74
	44	5220	12.78	12.65	15.73
	48	5240	12.8	12.81	15.82
802.11ax HE40	38	5190	12.31	12.24	15.29
	46	5230	12.31	12.16	15.25
802.11ax HE80	42	5210	10.74	10.77	13.77

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	12.71
	56	5280	12.72
	60	5300	12.74
	64	5320	12.79
802.11n HT20	52	5260	12.81
	56	5280	12.81
	60	5300	12.85
	64	5320	12.84
802.11n HT40	54	5270	14.41
	62	5310	13.99
802.11ac VHT20	52	5260	12.76
	56	5280	12.67
	60	5300	12.7
	64	5320	12.83
802.11ac VHT40	54	5270	12.22
	62	5310	12.19
802.11ac VHT80	58	5290	12.18
802.11ac VHT160	50	5250	10.78
802.11ax HE20	52	5260	12.79
	56	5280	12.82
	60	5300	12.85
	64	5320	12.67
802.11ax HE40	54	5270	12.18
	62	5310	12.24
802.11ax HE80	58	5290	12.32
802.11ax HE160	50	5250	10.72

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	12.93	12.93
	56	12.99	12.99
	60	12.95	12.95
	64	12.92	12.92
802.11n HT20	52	12.84	12.84
	56	12.72	12.72
	60	12.81	12.81
	64	12.78	12.78
802.11n HT40	54	12.2	12.2
	62	12.15	12.15
802.11ac VHT20	52	12.65	12.65
	56	12.77	12.77
	60	12.83	12.83
	64	12.84	12.84
802.11ac VHT40	54	12.15	12.15
	62	12.28	12.28
802.11ac VHT80	58	12.19	12.19
802.11ac VHT160	50	10.69	10.69
802.11ax HE20	52	12.72	12.72
	56	12.76	12.76
	60	12.7	12.7
	64	12.83	12.83
802.11ax HE40	54	12.25	12.25
	62	12.15	12.15
802.11ax HE80	58	12.16	12.16
802.11ax HE160	50	10.76	10.76

WLAN Conducted Power (QCNFA765 Sensor ON)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	12.98	12.45	15.73
	56	5280	12.96	12.51	15.75
	60	5300	12.99	11.88	15.48
	64	5320	12.98	11.52	15.32
802.11n HT20	52	5260	12.83	12.29	15.58
	56	5280	12.68	12.2	15.46
	60	5300	12.85	12.26	15.58
	64	5320	12.67	12.23	15.47
802.11n HT40	54	5270	12.15	11.66	14.92
	62	5310	12.3	11.75	15.04
802.11ac VHT20	52	5260	12.82	12.16	15.51
	56	5280	12.82	12.21	15.54
	60	5300	12.75	12.31	15.55
	64	5320	12.75	12.25	15.52
802.11ac VHT40	54	5270	12.25	11.83	15.06
	62	5310	12.2	11.83	15.03
802.11ac VHT80	58	5290	12.17	11.78	14.99
802.11ac VHT160	50	5250	10.81	10.33	13.59
802.11ax HE20	52	5260	12.75	12.2	15.49
	56	5280	12.66	12.32	15.5
	60	5300	12.72	12.28	15.52
	64	5320	12.81	12.23	15.54
802.11ax HE40	54	5270	12.33	11.79	15.08
	62	5310	12.32	11.69	15.03
802.11ax HE80	58	5290	12.22	11.66	14.96
802.11ax HE160	50	5250	10.77	10.28	13.54

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	11.73
	116	5580	11.91
	120	5600	11.87
	124	5620	11.84
	132	5660	11.75
	140	5700	11.96
	144	5720	11.97
802.11n HT20	100	5500	11.67
	116	5580	11.71
	120	5600	11.66
	124	5620	11.76
	132	5660	11.71
	140	5700	11.78
	144	5720	11.8
802.11n HT40	102	5510	11.32
	110	5550	11.16
	118	5590	11.35
	126	5630	11.15
	134	5670	11.2
	142	5710	11.22
802.11ac VHT20	100	5500	11.67
	116	5580	11.7
	120	5600	11.83
	124	5620	11.78
	132	5660	11.8
	140	5700	11.76
	144	5720	11.75
802.11ac VHT40	102	5510	11.18
	110	5550	11.18
	118	5590	11.16
	126	5630	11.25
	134	5670	11.29
	142	5710	11.32
802.11ac VHT80	106	5530	11.17
	122	5610	11.15
	138	5690	11.18
802.11ac VHT160	114	5570	11.32
802.11ax HE20	100	5500	11.74
	116	5580	11.79
	120	5600	11.77
	124	5620	11.83
	132	5660	11.65
	140	5700	11.74
	144	5720	11.65
802.11ax HE40	102	5510	11.19
	110	5550	11.23
	118	5590	11.26
	126	5630	11.34
	134	5670	11.33
	142	5710	11.21
802.11ax HE80	106	5530	11.32
	122	5610	11.16
	138	5690	11.19
802.11ax HE160	114	5570	11.27

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	11.98
	116	5580	11.94
	120	5600	11.96
	124	5620	11.87
	132	5660	11.99
	140	5700	11.79
	144	5720	11.97
802.11n HT20	100	5500	11.67
	116	5580	11.76
	120	5600	11.77
	124	5620	11.65
	132	5660	11.83
	140	5700	11.81
	144	5720	11.68
802.11n HT40	102	5510	11.15
	110	5550	11.33
	118	5590	11.18
	126	5630	11.34
	134	5670	11.25
	142	5710	11.21
802.11ac VHT20	100	5500	11.72
	116	5580	11.7
	120	5600	11.82
	124	5620	11.8
	132	5660	11.77
	140	5700	11.77
	144	5720	11.79
802.11ac VHT40	102	5510	11.21
	110	5550	11.18
	118	5590	11.27
	126	5630	11.23
	134	5670	11.27
802.11ac VHT80	142	5710	11.15
	106	5530	11.3
	122	5610	11.18
802.11ac VHT160	138	5690	11.19
	114	5570	11.17
802.11ax HE20	100	5500	11.69
	116	5580	11.66
	120	5600	11.75
	124	5620	11.73
	132	5660	11.73
	140	5700	11.78
	144	5720	11.76
802.11ax HE40	102	5510	11.23
	110	5550	11.22
	118	5590	11.33
	126	5630	11.16
	134	5670	11.31
802.11ax HE80	142	5710	11.24
	106	5530	11.24
	122	5610	11.26
802.11ax HE160	138	5690	11.33
	114	5570	11.19

WLAN Conducted Power (QCNFA765 Sensor ON)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	10.31	11.99	14.24
	116	5580	10.65	11.98	14.38
	120	5600	11.18	11.99	14.61
	124	5620	11.55	11.84	14.71
	132	5660	11.99	11.49	14.76
	140	5700	11.97	10.12	14.15
802.11n HT20	144	5720	11.82	10.07	14.04
	100	5500	11.1	11.18	14.15
	116	5580	11.03	11.14	14.1
	120	5600	11.1	11.17	14.15
	124	5620	11.18	11.02	14.11
	132	5660	11.09	11.03	14.07
802.11n HT40	140	5700	11.15	11.09	14.13
	144	5720	11.15	11.06	14.12
	102	5510	10.64	10.7	13.68
	110	5550	10.59	10.57	13.59
	118	5590	10.53	10.59	13.57
	126	5630	10.63	10.59	13.62
802.11ac VHT20	134	5670	10.65	10.66	13.67
	142	5710	10.58	10.65	13.63
	100	5500	11.12	11.12	14.13
	116	5580	11.18	11.2	14.2
	120	5600	11.03	11.12	14.09
	124	5620	11.04	11.06	14.06
802.11ac VHT40	132	5660	11.18	11.11	14.16
	140	5700	11.01	11.03	14.03
	144	5720	11.1	11.12	14.12
	102	5510	10.69	10.7	13.71
	110	5550	10.55	10.54	13.56
	118	5590	10.67	10.51	13.6
802.11ac VHT80	126	5630	10.58	10.69	13.65
	134	5670	10.52	10.63	13.59
	142	5710	10.52	10.6	13.57
	106	5530	10.52	10.52	13.53
802.11ac VHT160	122	5610	10.66	10.54	13.61
	138	5690	10.7	10.58	13.65
	114	5570	10.69	10.53	13.62
802.11ax HE20	100	5500	11.06	11.18	14.13
	116	5580	11.17	11.19	14.19
	120	5600	11.1	11.08	14.1
	124	5620	11.07	11.03	14.06
	132	5660	11.2	11.06	14.14
	140	5700	11.11	11.04	14.09
802.11ax HE40	144	5720	11.04	11.2	14.13
	102	5510	10.68	10.59	13.65
	110	5550	10.66	10.69	13.69
	118	5590	10.67	10.54	13.62
	126	5630	10.61	10.6	13.62
	134	5670	10.66	10.61	13.65
802.11ax HE80	142	5710	10.53	10.52	13.54
	106	5530	10.67	10.55	13.62
	122	5610	10.63	10.52	13.59
802.11ax HE160	138	5690	10.65	10.69	13.68
	114	5570	10.69	10.6	13.66

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	10.91
	153	5765	10.85
	157	5785	10.99
	161	5805	10.91
	165	5825	10.76
802.11n HT20	149	5745	10.72
	153	5765	10.85
	157	5785	10.74
	161	5805	10.84
	165	5825	10.85
802.11n HT40	151	5755	10.16
	159	5795	10.34
802.11ac VHT20	149	5745	10.65
	153	5765	10.69
	157	5785	10.65
	161	5805	10.83
	165	5825	10.85
802.11ac VHT40	151	5755	10.2
	159	5795	10.16
802.11ac VHT80	155	5775	10.22
802.11ax HE20	149	5745	10.65
	153	5765	10.81
	157	5785	10.83
	161	5805	10.71
	165	5825	10.74
802.11ax HE40	151	5755	10.35
	159	5795	10.3
802.11ax HE80	155	5775	10.33

WLAN Conducted Power (QCNFA765 Sensor ON)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	10.72
	153	5765	10.71
	157	5785	10.99
	161	5805	10.96
	165	5825	10.98
802.11n HT20	149	5745	10.83
	153	5765	10.8
	157	5785	10.73
	161	5805	10.68
	165	5825	10.71
802.11n HT40	151	5755	10.28
	159	5795	10.24
802.11ac VHT20	149	5745	10.79
	153	5765	10.68
	157	5785	10.7
	161	5805	10.79
	165	5825	10.83
802.11ac VHT40	151	5755	10.35
	159	5795	10.33
802.11ac VHT80	155	5775	10.17
802.11ax HE20	149	5745	10.79
	153	5765	10.68
	157	5785	10.71
	161	5805	10.84
	165	5825	10.68
802.11ax HE40	151	5755	10.34
	159	5795	10.21
802.11ax HE80	155	5775	10.3

WLAN Conducted Power (QCNFA765 Sensor ON)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	10.99	9.31	13.24
	153	5765	10.98	9.09	13.15
	157	5785	10.98	9.67	13.38
	161	5805	10.99	9.51	13.32
	165	5825	10.97	9.55	13.33
802.11n HT20	149	5745	10.17	10.23	13.21
	153	5765	10.16	10.08	13.13
	157	5785	10.24	10.23	13.25
	161	5805	10.22	10.19	13.22
	165	5825	10.12	10.05	13.1
802.11n HT40	151	5755	9.57	9.68	12.64
	159	5795	9.6	9.57	12.6
802.11ac VHT20	149	5745	10.21	10.23	13.23
	153	5765	10.22	10.08	13.16
	157	5785	10.09	10.22	13.17
	161	5805	10.14	10.07	13.12
	165	5825	10.25	10.24	13.26
802.11ac VHT40	151	5755	9.71	9.58	12.66
	159	5795	9.62	9.75	12.7
802.11ac VHT80	155	5775	9.59	9.61	12.61
802.11ax HE20	149	5745	10.08	10.25	13.18
	153	5765	10.07	10.25	13.17
	157	5785	10.24	10.12	13.19
	161	5805	10.12	10.11	13.13
	165	5825	10.1	10.17	13.15
802.11ax HE40	151	5755	9.67	9.6	12.65
	159	5795	9.55	9.66	12.62
802.11ax HE80	155	5775	9.62	9.61	12.63

WLAN Conducted Power (QCNA765 Sensor ON)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	10.8
	5	5975	10.74
	9	5995	10.65
	13	6015	10.67
	17	6035	10.72
	21	6055	10.75
	25	6075	10.8
	29	6095	10.7
	33	6115	10.78
	37	6135	10.84
	41	6155	10.76
	45	6175	10.77
	49	6195	10.7
	53	6215	10.74
	57	6235	10.66
	61	6255	10.78
	65	6275	10.74
	69	6295	10.74
	73	6315	10.67
	77	6335	10.82
	81	6355	10.77
	85	6375	10.75
	89	6395	10.8
	93	6415	10.78
802.11ax HE20	1	5955	10.7
	5	5975	10.83
	9	5995	10.81
	13	6015	10.69
	17	6035	10.77
	21	6055	10.78
	25	6075	10.81
	29	6095	10.74
	33	6115	10.68
	37	6135	10.68
	41	6155	10.66
	45	6175	10.83
	49	6195	10.75
	53	6215	10.75
	57	6235	10.82
	61	6255	10.78
	65	6275	10.82
	69	6295	10.83
	73	6315	10.77
	77	6335	10.72
	81	6355	10.65
	85	6375	10.71
	89	6395	10.72
	93	6415	10.83
802.11ax HE40	3	5965	10.16
	11	6005	10.27
	19	6045	10.15
	27	6085	10.26
	35	6125	10.27
	43	6165	10.25
	51	6205	10.28
	59	6245	10.22
	67	6285	10.29
	75	6325	10.33
	83	6365	10.3
	91	6405	10.29
802.11ax HE80	7	5985	10.18
	23	6065	10.24
	39	6145	10.3
	55	6225	10.21
	71	6305	10.16
802.11ax HE160	87	6385	10.15
	15	6025	10.21
	47	6185	10.18
	79	6345	10.29

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	10.51
	5	5975	10.43
	9	5995	10.48
	13	6015	10.45
	17	6035	10.54
	21	6055	10.57
	25	6075	10.49
	29	6095	10.59
	33	6115	10.46
	37	6135	10.57
	41	6155	10.42
	45	6175	10.44
	49	6195	10.55
	53	6215	10.59
	57	6235	10.59
	61	6255	10.45
	65	6275	10.52
	69	6295	10.49
	73	6315	10.59
	77	6335	10.44
	81	6355	10.43
	85	6375	10.47
	89	6395	10.43
	93	6415	10.49
802.11ax HE20	1	5955	10.49
	5	5975	10.6
	9	5995	10.5
	13	6015	10.57
	17	6035	10.45
	21	6055	10.42
	25	6075	10.45
	29	6095	10.47
	33	6115	10.54
	37	6135	10.45
	41	6155	10.51
	45	6175	10.46
	49	6195	10.42
	53	6215	10.49
	57	6235	10.48
	61	6255	10.48
	65	6275	10.47
	69	6295	10.19
	73	6315	10.26
	77	6335	10.24
	81	6355	10.25
	85	6375	10.33
	89	6395	10.16
	93	6415	10.21
802.11ax HE40	3	5965	9.75
	11	6005	9.82
	19	6045	9.82
	27	6085	9.85
	35	6125	9.75
	43	6165	9.68
	51	6205	9.72
	59	6245	9.83
	67	6285	9.76
	75	6325	9.82
802.11ax HE80	83	6365	9.69
	91	6405	9.72
	7	5985	9.8
	23	6065	9.67
	39	6145	9.78
802.11ax HE160	55	6225	9.85
	71	6305	9.82
	87	6385	9.66
	15	6025	9.75
	47	6185	9.84
	79	6345	9.79

WLAN Conducted Power (QCNA765 Sensor ON)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	10.05	10.02	13.05
	5	5975	10.1	10.06	13.09
	9	5995	10.19	10.02	13.12
	13	6015	10.14	10	13.08
	17	6035	10.17	10.16	13.18
	21	6055	10.1	10.1	13.11
	25	6075	10.05	10.13	13.1
	29	6095	10.18	10.14	13.17
	33	6115	10	10.12	13.07
	37	6135	10.2	10.2	13.21
	41	6155	10.05	10.18	13.13
	45	6175	10.16	10.13	13.16
	49	6195	10.04	10.09	13.08
	53	6215	10.2	10.1	13.16
	57	6235	10	10.16	13.09
	61	6255	10.12	10.17	13.16
	65	6275	10.15	10.09	13.13
	69	6295	10.18	10.02	13.11
	73	6315	10.07	10.18	13.14
	77	6335	10.2	10.11	13.17
802.11ax HE20	81	6355	10	10.02	13.02
	85	6375	10.12	10	13.07
	89	6395	10.1	10.04	13.08
	93	6415	10.19	10.01	13.11
	1	5955	10.16	10.01	13.1
	5	5975	10.15	10.02	13.1
	9	5995	10.15	10.16	13.17
	13	6015	10.12	10.17	13.16
	17	6035	10.02	10.13	13.09
	21	6055	10.19	10.09	13.15
	25	6075	10.14	10.13	13.15
	29	6095	10.13	10.09	13.12
	33	6115	10.05	10.03	13.05
	37	6135	10.05	10.02	13.05
	41	6155	10.04	10.04	13.05
	45	6175	10.1	10.18	13.15
	49	6195	10.05	10.06	13.07
	53	6215	10.06	10.05	13.07
	57	6235	10.16	10.2	13.19
	61	6255	10.17	10.18	13.19
802.11ax HE40	65	6275	10.09	10.09	13.1
	69	6295	10.15	10.06	13.12
	73	6315	10.06	10.19	13.14
	77	6335	10.16	10.04	13.11
	81	6355	10.18	10.01	13.11
	85	6375	10.11	10.08	13.11
	89	6395	10.1	10.07	13.1
	93	6415	10.08	10.16	13.13
	3	5965	9.56	9.67	12.63
	11	6005	9.67	9.55	12.62
	19	6045	9.6	9.52	12.57
	27	6085	9.6	9.7	12.66
802.11ax HE80	35	6125	9.7	9.68	12.7
	43	6165	9.54	9.57	12.57
	51	6205	9.65	9.68	12.68
	59	6245	9.69	9.64	12.68
	67	6285	9.51	9.67	12.6
	75	6325	9.7	9.59	12.66
	83	6365	9.69	9.52	12.62
	91	6405	9.57	9.55	12.57
	7	5985	9.54	9.64	12.6
	23	6065	9.57	9.65	12.62
802.11ax HE160	39	6145	9.51	9.54	12.54
	55	6225	9.65	9.5	12.59
	71	6305	9.51	9.52	12.53
	87	6385	9.65	9.61	12.64
	15	6025	10.23	10.3	13.28
	47	6185	10.15	10.34	13.26
	79	6345	10.22	10.23	13.24

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	10.85
	101	6455	10.96
	105	6475	10.79
	109	6495	10.83
	113	6515	10.81
	117	6535	10.8
802.11ax HE20	97	6435	10.82
	101	6455	10.71
	105	6475	10.74
	109	6495	10.78
	113	6515	10.8
	117	6535	10.66
802.11ax HE40	99	6445	10.32
	107	6485	10.33
	115	6525	10.2
802.11ax HE80	103	6465	10.23
	119	6545	10.16
802.11ax HE160	111	6505	10.27

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	10.73
	101	6455	10.93
	105	6475	10.82
	109	6495	10.79
	113	6515	10.73
	117	6535	10.92
802.11ax HE20	97	6435	10.71
	101	6455	10.74
	105	6475	10.85
	109	6495	10.84
	113	6515	10.76
	117	6535	10.66
802.11ax HE40	99	6445	10.16
	107	6485	10.21
	115	6525	10.16
802.11ax HE80	103	6465	10.15
	119	6545	10.25
802.11ax HE160	111	6505	10.22

WLAN Conducted Power (QCNFA765 Sensor ON)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	10.58	10.66	13.63
	101	6455	10.6	10.95	13.79
	105	6475	10.53	10.65	13.6
	109	6495	10.65	10.64	13.66
	113	6515	10.66	10.63	13.66
802.11ax HE20	117	6535	10.57	10.57	13.58
	97	6435	10.61	10.6	13.62
	101	6455	10.6	10.54	13.58
	105	6475	10.58	10.51	13.56
	109	6495	10.62	10.56	13.6
802.11ax HE40	113	6515	10.67	10.66	13.68
	117	6535	10.59	10.56	13.59
	99	6445	10.06	10.14	13.11
	107	6485	10.03	10.07	13.06
	115	6525	10	10.17	13.1
802.11ax HE80	103	6465	10.06	10.19	13.14
	119	6545	10.01	10.2	13.12
802.11ax HE160	111	6505	10.01	10.2	13.12

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	121	6555	10.81
	125	6575	10.81
	129	6595	10.84
	133	6615	10.66
	137	6635	10.81
	141	6655	10.78
	145	6675	10.72
	149	6695	10.75
	153	6715	10.8
	157	6735	10.78
	161	6755	10.79
	165	6775	10.85
	169	6795	10.79
	173	6815	10.79
	177	6835	10.84
	181	6855	10.78
	185	6875	10.78
802.11ax HE20	121	6555	10.75
	125	6575	10.73
	129	6595	10.73
	133	6615	10.68
	137	6635	10.79
	141	6655	10.69
	145	6675	10.77
	149	6695	10.83
	153	6715	10.68
	157	6735	10.67
	161	6755	10.65
	165	6775	10.76
	169	6795	10.79
	173	6815	10.66
	177	6835	10.65
	181	6855	10.84
	185	6875	10.81
802.11ax HE40	123	6565	10.3
	131	6605	10.31
	139	6645	10.29
	147	6685	10.33
	155	6725	10.33
	163	6765	10.3
	171	6805	10.24
	179	6845	10.26
802.11ax HE80	187	6885	10.34
	135	6625	10.16
	151	6705	10.31
	167	6785	10.31
802.11ax HE160	183	6865	10.27
	143	6665	10.24
	175	6825	10.24

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	121	6555	10.75
	125	6575	10.72
	129	6595	10.8
	133	6615	10.66
	137	6635	10.65
	141	6655	10.84
	145	6675	10.7
	149	6695	10.75
	153	6715	10.68
	157	6735	10.83
	161	6755	10.82
	165	6775	10.83
	169	6795	10.81
	173	6815	10.83
	177	6835	10.84
	181	6855	10.76
	185	6875	10.85
802.11ax HE20	121	6555	10.82
	125	6575	10.68
	129	6595	10.84
	133	6615	10.79
	137	6635	10.74
	141	6655	10.84
	145	6675	10.78
	149	6695	10.72
	153	6715	10.66
	157	6735	10.84
	161	6755	10.73
	165	6775	10.73
	169	6795	10.8
	173	6815	10.69
	177	6835	10.78
	181	6855	10.66
	185	6875	10.81
802.11ax HE40	123	6565	10.26
	131	6605	10.18
	139	6645	10.21
	147	6685	10.35
	155	6725	10.25
	163	6765	10.29
	171	6805	10.26
	179	6845	10.35
802.11ax HE80	187	6885	10.34
	135	6625	10.16
	151	6705	10.17
	167	6785	10.23
802.11ax HE160	183	6865	10.16
	143	6665	10.2
	175	6825	10.16

WLAN Conducted Power (QCNA765 Sensor ON)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	121	6555	10.07	10.09	13.09
	125	6575	10.13	10.2	13.18
	129	6595	10.13	10.03	13.09
	133	6615	10.13	10.12	13.14
	137	6635	10.08	10.07	13.09
	141	6655	10.14	10.04	13.1
	145	6675	10.08	10.08	13.09
	149	6695	10.2	10.09	13.16
	153	6715	10.13	10.04	13.1
	157	6735	10.16	10.1	13.14
	161	6755	10.08	10.02	13.06
	165	6775	10.17	10.1	13.15
	169	6795	10	10.05	13.04
	173	6815	10.13	10.07	13.11
	177	6835	10.02	10.1	13.07
	181	6855	10.16	10.1	13.14
	185	6875	10.03	10	13.03
802.11ax HE20	121	6555	10.03	10.18	13.12
	125	6575	10.12	10.2	13.17
	129	6595	10.17	10.14	13.17
	133	6615	10.13	10.15	13.15
	137	6635	10.16	10.07	13.13
	141	6655	10.11	10.02	13.08
	145	6675	10.16	10.05	13.12
	149	6695	10.16	10.15	13.17
	153	6715	10.04	10.1	13.08
	157	6735	10.12	10.14	13.14
	161	6755	10.11	10.2	13.17
	165	6775	10.2	10.01	13.12
	169	6795	10.14	10.18	13.17
	173	6815	10.01	10.12	13.08
	177	6835	10.12	10.07	13.11
	181	6855	10.06	10.09	13.09
	185	6875	10.13	10.19	13.17
802.11ax HE40	123	6565	9.67	9.54	12.62
	131	6605	9.57	9.69	12.64
	139	6645	9.61	9.7	12.67
	147	6685	9.6	9.54	12.58
	155	6725	9.55	9.55	12.56
	163	6765	9.66	9.58	12.63
	171	6805	9.61	9.53	12.58
	179	6845	9.62	9.65	12.65
802.11ax HE80	187	6885	9.58	9.64	12.62
	135	6625	9.67	9.56	12.63
	151	6705	9.55	9.58	12.58
	167	6785	9.63	9.7	12.68
802.11ax HE160	183	6865	9.6	9.63	12.63
	143	6665	9.52	9.68	12.61
	175	6825	9.59	9.64	12.63

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	10.77
	193	6915	10.85
	197	6935	10.66
	201	6955	10.79
	205	6975	10.65
	209	6995	10.7
	213	7015	10.69
	217	7035	10.68
	221	7055	10.8
	225	7075	10.65
	229	7095	10.66
	233	7115	10.74
802.11ax HE20	189	6895	10.74
	193	6915	10.82
	197	6935	10.65
	201	6955	10.83
	205	6975	10.78
	209	6995	10.69
	213	7015	10.84
	217	7035	10.7
	221	7055	10.67
	225	7075	10.8
	229	7095	10.76
	233	7115	10.78
802.11ax HE40	195	6925	10.29
	203	6965	10.35
	211	7005	10.35
	219	7045	10.17
	227	7085	10.32
802.11ax HE80	199	6945	10.34
	215	7025	10.24
802.11ax HE160	207	6985	10.15

WLAN Conducted Power (QCNFA765 Sensor ON)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	10.66
	193	6915	10.8
	197	6935	10.65
	201	6955	10.67
	205	6975	10.81
	209	6995	10.66
	213	7015	10.85
	217	7035	10.71
	221	7055	10.79
	225	7075	10.73
	229	7095	10.65
	233	7115	10.73
802.11ax HE20	189	6895	10.67
	193	6915	10.83
	197	6935	10.69
	201	6955	10.72
	205	6975	10.75
	209	6995	10.75
	213	7015	10.82
	217	7035	10.82
	221	7055	10.84
	225	7075	10.84
	229	7095	10.71
	233	7115	10.75
802.11ax HE40	195	6925	10.3
	203	6965	10.33
	211	7005	10.3
	219	7045	10.23
	227	7085	10.33
802.11ax HE80	199	6945	10.35
	215	7025	10.3
802.11ax HE160	207	6985	10.25

WLAN Conducted Power (QCNA765 Sensor ON)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	10.18	10.2	13.2
	193	6915	10.14	10.05	13.11
	197	6935	10.07	10.15	13.12
	201	6955	10.17	10.06	13.13
	205	6975	10.06	10.2	13.14
	209	6995	10.18	10.18	13.19
	213	7015	10.03	10.09	13.07
	217	7035	10.15	10.06	13.12
	221	7055	10.15	10.2	13.19
	225	7075	10.1	10.08	13.1
	229	7095	10.08	10.17	13.14
	233	7115	10.03	10.2	13.13
802.11ax HE20	189	6895	10.2	10.14	13.18
	193	6915	10.08	10.14	13.12
	197	6935	10.18	10.06	13.13
	201	6955	10.18	10.18	13.19
	205	6975	10.15	10.02	13.1
	209	6995	10.2	10.04	13.13
	213	7015	10.04	10.03	13.05
	217	7035	10.09	10.09	13.1
	221	7055	10.1	10.15	13.14
	225	7075	10.04	10.08	13.07
	229	7095	10.08	10.15	13.13
	233	7115	10.1	10.16	13.14
802.11ax HE40	195	6925	9.53	9.5	12.53
	203	6965	9.7	9.53	12.63
	211	7005	9.61	9.54	12.59
	219	7045	9.57	9.59	12.59
	227	7085	9.6	9.54	12.58
802.11ax HE80	199	6945	9.59	9.61	12.61
	215	7025	9.68	9.62	12.66
802.11ax HE160	207	6985	9.56	9.61	12.6

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	16.38
	6	2437	16.49
	11	2462	16.29
	12	2467	16.33
	13	2472	14.4
802.11g	1	2412	15.82
	6	2437	16.39
	11	2462	16.19
	12	2467	14.32
	13	2472	2.18
802.11n HT20	1	2412	14.35
	6	2437	16.41
	11	2462	13.26
	12	2467	11.83
	13	2472	1.79
802.11n HT40	3	2422	12.74
	6	2437	14.22
	9	2452	13.28
	10	2457	10.73
	11	2462	3.83
802.11ac VHT20	1	2412	14.33
	6	2437	16.33
	11	2462	13.33
	12	2467	11.77
	13	2472	1.66
802.11ac VHT40	3	2422	12.68
	6	2437	14.29
	9	2452	13.3
	10	2457	10.77
	11	2462	3.83
802.11ax HE20	1	2412	14.2
	6	2437	16.39
	11	2462	13.16
	12	2467	11.73
	13	2472	1.78
802.11ax HE40	3	2422	12.67
	6	2437	14.29
	9	2452	13.24
	10	2457	10.79
	11	2462	3.83

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.98
	6	2437	18.96
	11	2462	17.77
	12	2467	16.99
	13	2472	14.41
802.11g	1	2412	15.82
	6	2437	18.68
	11	2462	16.16
	12	2467	14.15
	13	2472	2.26
802.11n HT20	1	2412	14.28
	6	2437	17.71
	11	2462	13.32
	12	2467	11.79
	13	2472	1.75
802.11n HT40	3	2422	12.71
	6	2437	14.2
	9	2452	13.3
	10	2457	10.85
	11	2462	3.73
802.11ac VHT20	1	2412	14.35
	6	2437	17.75
	11	2462	13.2
	12	2467	11.85
	13	2472	1.66
802.11ac VHT40	3	2422	12.79
	6	2437	14.22
	9	2452	13.18
	10	2457	10.73
	11	2462	3.71
802.11ax HE20	1	2412	14.26
	6	2437	17.8
	11	2462	13.26
	12	2467	11.65
	13	2472	1.82
802.11ax HE40	3	2422	12.74
	6	2437	14.28
	9	2452	13.2
	10	2457	10.72
	11	2462	3.82

WLAN Conducted Power (QCNFA765 DBS ON)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	16.32	16.48	19.41
	6	2437	16.46	16.49	19.49
	11	2462	16.42	16.33	19.39
	12	2467	16.05	16.47	19.28
	13	2472	13.01	14.5	16.83
802.11g	1	2412	14.73	15.31	18.04
	6	2437	16.37	16.26	19.33
	11	2462	15.16	15.67	18.43
	12	2467	13.17	13.79	16.50
	13	2472	1.29	1.67	4.49
802.11n HT20	1	2412	13.29	13.83	16.58
	6	2437	16.35	16.33	19.35
	11	2462	12.25	12.67	15.48
	12	2467	10.84	11.35	14.11
	13	2472	0.79	1.33	4.08
802.11n HT40	3	2422	11.68	12.32	15.02
	6	2437	13.16	13.79	16.50
	9	2452	12.3	12.69	15.51
	10	2457	9.75	10.21	13.00
	11	2462	2.81	3.23	6.04
802.11ac VHT20	1	2412	13.33	13.72	16.54
	6	2437	16.73	16.18	19.47
	11	2462	12.23	12.74	15.50
	12	2467	10.85	11.27	14.08
	13	2472	0.67	1.27	3.99
802.11ac VHT40	3	2422	11.83	12.23	15.04
	6	2437	13.33	13.82	16.59
	9	2452	12.28	12.84	15.58
	10	2457	9.77	10.22	13.01
	11	2462	2.83	3.23	6.04
802.11ax HE20	1	2412	13.26	13.84	16.57
	6	2437	16.31	16.25	19.29
	11	2462	12.19	12.75	15.49
	12	2467	10.82	11.34	14.10
	13	2472	0.83	1.27	4.07
802.11ax HE40	3	2422	11.72	12.17	14.96
	6	2437	13.25	13.71	16.50
	9	2452	12.29	12.79	15.56
	10	2457	9.84	10.3	13.09
	11	2462	2.85	3.33	6.11

WLAN Conducted Power (QCNFA765 DBS ON)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	14.86
	39	2441	14.45
	78	2480	14.07
LE	0	2402	6.15
	19	2440	6.12
	39	2480	6.02

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	9.94
	40	5200	9.99
	44	5220	9.75
	48	5240	9.97
802.11n HT20	36	5180	9.66
	40	5200	9.75
	44	5220	9.65
	48	5240	9.67
802.11n HT40	38	5190	9.18
	46	5230	9.31
802.11ac VHT20	36	5180	9.83
	40	5200	9.77
	44	5220	9.66
	48	5240	9.67
802.11ac VHT40	38	5190	9.16
	46	5230	9.22
802.11ac VHT80	42	5210	9.24
802.11ax HE20	36	5180	9.75
	40	5200	9.85
	44	5220	9.85
	48	5240	9.82
802.11ax HE40	38	5190	9.23
	46	5230	9.21
802.11ax HE80	42	5210	9.3

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	9.75
	40	5200	9.96
	44	5220	9.83
	48	5240	9.95
802.11n HT20	36	5180	9.76
	40	5200	9.8
	44	5220	9.8
	48	5240	9.83
802.11n HT40	38	5190	9.32
	46	5230	9.15
802.11ac VHT20	36	5180	9.82
	40	5200	9.65
	44	5220	9.74
	48	5240	9.84
802.11ac VHT40	38	5190	9.21
	46	5230	9.26
802.11ac VHT80	42	5210	9.34
802.11ax HE20	36	5180	9.75
	40	5200	9.7
	44	5220	9.7
	48	5240	9.79
802.11ax HE40	38	5190	9.21
	46	5230	9.33
802.11ax HE80	42	5210	9.28

WLAN Conducted Power (QCNFA765 DBS ON)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	9.68	9.71	12.71
	40	5200	9.98	9.92	12.96
	44	5220	9.97	9.39	12.7
	48	5240	9.98	9.17	12.6
802.11n HT20	36	5180	9.79	9.74	12.78
	40	5200	9.72	9.81	12.78
	44	5220	9.78	9.7	12.75
	48	5240	9.81	9.66	12.75
802.11n HT40	38	5190	9.28	9.15	12.23
	46	5230	9.33	9.16	12.26
802.11ac VHT20	36	5180	9.67	9.65	12.67
	40	5200	9.68	9.7	12.7
	44	5220	9.69	9.77	12.74
	48	5240	9.67	9.74	12.72
802.11ac VHT40	38	5190	9.31	9.32	12.33
	46	5230	9.33	9.22	12.29
802.11ac VHT80	42	5210	9.26	9.34	12.31
802.11ax HE20	36	5180	9.8	9.66	12.74
	40	5200	9.8	9.78	12.8
	44	5220	9.79	9.77	12.79
	48	5240	9.79	9.68	12.75
802.11ax HE40	38	5190	9.19	9.23	12.22
	46	5230	9.16	9.19	12.19
802.11ax HE80	42	5210	9.29	9.27	12.29

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	9.91
	56	5280	9.99
	60	5300	9.75
	64	5320	9.78
802.11n HT20	52	5260	9.85
	56	5280	9.7
	60	5300	9.78
	64	5320	9.75
802.11n HT40	54	5270	9.15
	62	5310	9.22
802.11ac VHT20	52	5260	9.76
	56	5280	9.74
	60	5300	9.68
	64	5320	9.76
802.11ac VHT40	54	5270	9.33
	62	5310	9.15
802.11ac VHT80	58	5290	9.25
802.11ac VHT160	50	5250	9.23
802.11ax HE20	52	5260	9.81
	56	5280	9.75
	60	5300	9.78
	64	5320	9.68
802.11ax HE40	54	5270	9.22
	62	5310	9.34
802.11ax HE80	58	5290	9.18
802.11ax HE160	50	5250	9.15

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	12.93	9.8
	56	12.99	9.97
	60	12.95	9.83
	64	12.92	9.96
802.11n HT20	52	12.84	9.68
	56	12.72	9.75
	60	12.81	9.81
	64	12.78	9.66
802.11n HT40	54	12.2	9.29
	62	12.15	9.29
802.11ac VHT20	52	12.65	9.67
	56	12.77	9.69
	60	12.83	9.7
	64	12.84	9.81
802.11ac VHT40	54	12.15	9.16
	62	12.28	9.24
802.11ac VHT80	58	12.19	9.32
802.11ac VHT160	50	10.69	9.31
802.11ax HE20	52	12.72	9.73
	56	12.76	9.74
	60	12.7	9.74
	64	12.83	9.69
802.11ax HE40	54	12.25	9.17
	62	12.15	9.29
802.11ax HE80	58	12.16	9.32
802.11ax HE160	50	10.76	9.31

WLAN Conducted Power (QCNFA765 DBS ON)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	9.74	9.18	12.48
	56	5280	9.86	9.99	12.94
	60	5300	9.98	9.05	12.55
	64	5320	9.89	8.54	12.28
802.11n HT20	52	5260	9.72	9.75	12.75
	56	5280	9.74	9.8	12.78
	60	5300	9.74	9.81	12.79
	64	5320	9.73	9.81	12.78
802.11n HT40	54	5270	9.3	9.23	12.28
	62	5310	9.22	9.28	12.26
802.11ac VHT20	52	5260	9.65	9.81	12.74
	56	5280	9.78	9.79	12.8
	60	5300	9.67	9.68	12.69
	64	5320	9.81	9.72	12.78
802.11ac VHT40	54	5270	9.17	9.34	12.27
	62	5310	9.18	9.17	12.19
802.11ac VHT80	58	5290	9.35	9.35	12.36
802.11ac VHT160	50	5250	9.26	9.18	12.23
802.11ax HE20	52	5260	9.73	9.84	12.8
	56	5280	9.67	9.84	12.77
	60	5300	9.69	9.72	12.72
	64	5320	9.68	9.85	12.78
802.11ax HE40	54	5270	9.34	9.33	12.35
	62	5310	9.26	9.27	12.28
802.11ax HE80	58	5290	9.15	9.3	12.24
802.11ax HE160	50	5250	9.19	9.25	12.23

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	9.71
	116	5580	9.97
	120	5600	9.87
	124	5620	9.96
	132	5660	9.99
	140	5700	9.95
	144	5720	9.98
802.11n HT20	100	5500	9.81
	116	5580	9.7
	120	5600	9.74
	124	5620	9.75
	132	5660	9.72
	140	5700	9.73
	144	5720	9.65
802.11n HT40	102	5510	9.19
	110	5550	9.25
	118	5590	9.21
	126	5630	9.19
	134	5670	9.2
	142	5710	9.33
	100	5500	9.72
802.11ac VHT20	116	5580	9.67
	120	5600	9.73
	124	5620	9.78
	132	5660	9.72
	140	5700	9.75
	144	5720	9.72
	102	5510	9.19
802.11ac VHT40	110	5550	9.31
	118	5590	9.23
	126	5630	9.15
	134	5670	9.26
	142	5710	9.34
	106	5530	9.32
	122	5610	9.27
802.11ac VHT80	138	5690	9.22
	114	5570	9.22
802.11ac VHT160	114	5570	9.22
802.11ax HE20	100	5500	9.83
	116	5580	9.69
	120	5600	9.65
	124	5620	9.65
	132	5660	9.65
	140	5700	9.68
	144	5720	9.67
802.11ax HE40	102	5510	9.17
	110	5550	9.24
	118	5590	9.23
	126	5630	9.3
	134	5670	9.19
	142	5710	9.23
	106	5530	9.33
802.11ax HE80	122	5610	9.16
	138	5690	9.23
802.11ax HE160	114	5570	9.26

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	9.74
	116	5580	9.91
	120	5600	9.89
	124	5620	9.71
	132	5660	9.99
	140	5700	9.85
	144	5720	9.98
802.11n HT20	100	5500	9.65
	116	5580	9.78
	120	5600	9.75
	124	5620	9.72
	132	5660	9.82
	140	5700	9.77
	144	5720	9.69
802.11n HT40	102	5510	9.26
	110	5550	9.24
	118	5590	9.28
	126	5630	9.32
	134	5670	9.21
	142	5710	9.28
	100	5500	9.69
802.11ac VHT20	116	5580	9.68
	120	5600	9.82
	124	5620	9.78
	132	5660	9.72
	140	5700	9.79
	144	5720	9.65
	102	5510	9.34
802.11ac VHT40	110	5550	9.32
	118	5590	9.27
	126	5630	9.35
	134	5670	9.2
	142	5710	9.24
	106	5530	9.2
	122	5610	9.32
802.11ac VHT80	138	5690	9.18
	114	5570	9.17
802.11ac VHT160	114	5570	9.17
802.11ax HE20	100	5500	9.66
	116	5580	9.66
	120	5600	9.69
	124	5620	9.73
	132	5660	9.75
	140	5700	9.76
	144	5720	9.84
802.11ax HE40	102	5510	9.18
	110	5550	9.23
	118	5590	9.15
	126	5630	9.33
	134	5670	9.24
	142	5710	9.23
	106	5530	9.26
802.11ax HE80	122	5610	9.29
	138	5690	9.2
	114	5570	9.15

WLAN Conducted Power (QCNFA765 DBS ON)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	8.1	9.88	12.09
	116	5580	8.53	9.87	12.26
	120	5600	9.04	9.82	12.46
	124	5620	9.49	9.68	12.6
	132	5660	9.78	9.54	12.67
	140	5700	9.94	8.21	12.17
	144	5720	9.9	8.04	12.08
802.11n HT20	100	5500	9.33	9.29	12.32
	116	5580	9.33	9.33	12.34
	120	5600	9.19	9.29	12.25
	124	5620	9.27	9.22	12.26
	132	5660	9.16	9.26	12.22
	140	5700	9.28	9.17	12.24
	144	5720	9.19	9.28	12.25
802.11n HT40	102	5510	8.65	8.79	11.73
	110	5550	8.73	8.77	11.76
	118	5590	8.81	8.69	11.76
	126	5630	8.79	8.74	11.78
	134	5670	8.65	8.65	11.66
	142	5710	8.75	8.66	11.72
	100	5500	9.21	9.29	12.26
802.11ac VHT20	116	5580	9.31	9.18	12.26
	120	5600	9.32	9.34	12.34
	124	5620	9.22	9.22	12.23
	132	5660	9.32	9.24	12.29
	140	5700	9.28	9.26	12.28
	144	5720	9.35	9.35	12.36
	102	5510	8.76	8.65	11.72
802.11ac VHT40	110	5550	8.7	8.78	11.75
	118	5590	8.8	8.76	11.79
	126	5630	8.8	8.74	11.78
	134	5670	8.67	8.76	11.73
	142	5710	8.73	8.79	11.77
	106	5530	8.83	8.82	11.84
	122	5610	8.84	8.7	11.78
802.11ac VHT80	138	5690	8.73	8.67	11.71
802.11ac VHT160	114	5570	8.71	8.71	11.72
802.11ax HE20	100	5500	9.15	9.16	12.17
	116	5580	9.19	9.23	12.22
	120	5600	9.15	9.23	12.2
	124	5620	9.18	9.19	12.2
	132	5660	9.3	9.3	12.31
	140	5700	9.17	9.18	12.19
	144	5720	9.22	9.32	12.28
802.11ax HE40	102	5510	8.83	8.82	11.84
	110	5550	8.83	8.73	11.79
	118	5590	8.72	8.74	11.74
	126	5630	8.75	8.85	11.81
	134	5670	8.8	8.69	11.76
	142	5710	8.77	8.74	11.77
	106	5530	8.68	8.73	11.72
802.11ax HE80	122	5610	8.65	8.75	11.71
	138	5690	8.67	8.65	11.67
802.11ax HE160	114	5570	8.8	8.7	11.76

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	8.73
	153	5765	8.75
	157	5785	8.99
	161	5805	8.95
	165	5825	8.83
802.11n HT20	149	5745	8.8
	153	5765	8.78
	157	5785	8.71
	161	5805	8.76
	165	5825	8.67
802.11n HT40	151	5755	8.23
	159	5795	8.24
802.11ac VHT20	149	5745	8.72
	153	5765	8.69
	157	5785	8.82
	161	5805	8.74
	165	5825	8.85
802.11ac VHT40	151	5755	8.29
	159	5795	8.2
802.11ac VHT80	155	5775	8.16
802.11ax HE20	149	5745	8.83
	153	5765	8.67
	157	5785	8.85
	161	5805	8.77
	165	5825	8.68
802.11ax HE40	151	5755	8.33
	159	5795	8.25
802.11ax HE80	155	5775	8.25

WLAN Conducted Power (QCNFA765 DBS ON)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	8.82
	153	5765	8.98
	157	5785	8.99
	161	5805	8.98
	165	5825	8.95
802.11n HT20	149	5745	8.7
	153	5765	8.67
	157	5785	8.72
	161	5805	8.84
	165	5825	8.76
802.11n HT40	151	5755	8.35
	159	5795	8.32
802.11ac VHT20	149	5745	8.69
	153	5765	8.81
	157	5785	8.85
	161	5805	8.72
	165	5825	8.74
802.11ac VHT40	151	5755	8.23
	159	5795	8.22
802.11ac VHT80	155	5775	8.16
802.11ax HE20	149	5745	8.7
	153	5765	8.81
	157	5785	8.72
	161	5805	8.84
	165	5825	8.74
802.11ax HE40	151	5755	8.32
	159	5795	8.33
802.11ax HE80	155	5775	8.19

WLAN Conducted Power (QCNFA765 DBS ON)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	8.96	7.04	11.12
	153	5765	8.99	7.24	11.21
	157	5785	8.98	7.33	11.24
	161	5805	8.93	7.01	11.09
	165	5825	8.72	7.09	10.99
802.11n HT20	149	5745	7.85	8.34	11.11
	153	5765	7.72	8.26	11.01
	157	5785	7.82	8.3	11.08
	161	5805	7.84	8.22	11.04
	165	5825	7.84	8.18	11.02
802.11n HT40	151	5755	7.22	7.84	10.55
	159	5795	7.27	7.74	10.52
802.11ac VHT20	149	5745	7.82	8.22	11.03
	153	5765	7.72	8.31	11.04
	157	5785	7.83	8.19	11.02
	161	5805	7.76	8.33	11.06
	165	5825	7.84	8.17	11.02
802.11ac VHT40	151	5755	7.31	7.72	10.53
	159	5795	7.32	7.74	10.55
802.11ac VHT80	155	5775	7.25	7.75	10.52
802.11ax HE20	149	5745	7.79	8.22	11.02
	153	5765	7.66	8.25	10.98
	157	5785	7.67	8.28	11
	161	5805	7.84	8.22	11.04
	165	5825	7.65	8.29	10.99
802.11ax HE40	151	5755	7.28	7.85	10.58
	159	5795	7.16	7.7	10.45
802.11ax HE80	155	5775	7.26	7.85	10.58

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	7.15
	5	5975	7.3
	9	5995	7.29
	13	6015	7.31
	17	6035	7.24
	21	6055	7.36
	25	6075	7.21
	29	6095	7.26
	33	6115	7.23
	37	6135	7.34
	41	6155	7.23
	45	6175	7.34
	49	6195	7.3
	53	6215	7.29
	57	6235	7.19
	61	6255	7.26
	65	6275	7.16
	69	6295	7.16
	73	6315	7.3
	77	6335	7.31
	81	6355	7.21
802.11n HT20	85	6375	7.24
	89	6395	7.18
	93	6415	7.2
	1	5955	7.25
	5	5975	7.22
	9	5995	7.22
	13	6015	7.19
	17	6035	7.34
	21	6055	7.35
	25	6075	7.19
802.11ax HE20	29	6095	7.3
	33	6115	7.17
	37	6135	7.15
	1	5955	7.25
	5	5975	7.22
	9	5995	7.22
	13	6015	7.19
	17	6035	7.34
	21	6055	7.35
	25	6075	7.19
	29	6095	7.3
	33	6115	7.17
	37	6135	7.15
	41	6155	7.28
	45	6175	7.3
	49	6195	7.21
	53	6215	7.22
	57	6235	7.24
	61	6255	7.33
	65	6275	7.33
	69	6295	7.3
802.11ax HE40	73	6315	7.26
	77	6335	7.21
	81	6355	7.32
	85	6375	7.23
	89	6395	7.3
	93	6415	7.22
	3	5965	6.85
	11	6005	6.8
	19	6045	6.8
	27	6085	6.79
802.11ax HE80	35	6125	6.75
	43	6165	6.66
	51	6205	6.79
	59	6245	6.78
	67	6285	6.78
	75	6325	6.73
802.11ax HE160	83	6365	6.65
	91	6405	6.8
	7	5985	6.69
	23	6065	6.78
	39	6145	6.74
	55	6225	6.68
	71	6305	6.76
	87	6385	6.78
	15	6025	6.68
	47	6185	6.78
	79	6345	6.83

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	7.24
	5	5975	7.2
	9	5995	7.25
	13	6015	7.21
	17	6035	7.19
	21	6055	7.16
	25	6075	7.3
	29	6095	7.28
	33	6115	7.23
	37	6135	7.32
	41	6155	7.33
	45	6175	7.31
	49	6195	7.32
	53	6215	7.21
	57	6235	7.26
	61	6255	7.25
	65	6275	7.34
	69	6295	7.22
	73	6315	7.21
	77	6335	7.3
	81	6355	7.22
802.11n HT20	85	6375	7.17
	89	6395	7.28
	93	6415	7.19
	1	5955	7.13
	5	5975	7.1
	9	5995	7.26
	13	6015	7.23
	17	6035	7.28
802.11ax HE20	21	6055	7.19
	25	6075	7.1
	29	6095	7.15
	33	6115	7.11
	37	6135	7.24
	1	5955	7.16
	5	5975	7.31
	9	5995	7.21
	13	6015	7.32
	17	6035	7.17
	21	6055	7.23
	25	6075	7.31
	29	6095	7.28
	33	6115	7.28
	37	6135	7.33
	41	6155	7.25
	45	6175	7.22
	49	6195	7.23
	53	6215	7.25
	57	6235	7.19
802.11ax HE40	61	6255	7.21
	65	6275	7.21
	69	6295	7.31
	73	6315	7.33
	77	6335	7.24
	81	6355	7.17
	85	6375	7.15
	89	6395	7.33
	93	6415	7.3
	3	5965	6.79
	11	6005	6.7
	19	6045	6.65
802.11ax HE80	27	6085	6.65
	35	6125	6.82
	43	6165	6.78
	51	6205	6.79
	59	6245	6.72
	67	6285	6.79
	75	6325	6.65
	83	6365	6.85
802.11ax HE160	91	6405	6.67
	7	5985	6.75
	23	6065	6.71
	39	6145	6.78
	55	6225	6.82
	71	6305	6.71
	87	6385	6.71
	15	6025	6.84
	47	6185	6.7
	79	6345	6.72

WLAN Conducted Power (QCNFA765 DBS ON)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	7.25	7.24	10.26
	5	5975	7.29	7.32	10.32
	9	5995	7.31	7.31	10.32
	13	6015	7.35	7.24	10.31
	17	6035	7.29	7.28	10.3
	21	6055	7.18	7.29	10.25
	25	6075	7.23	7.19	10.22
	29	6095	7.26	7.23	10.26
	33	6115	7.33	7.28	10.32
	37	6135	7.29	7.31	10.31
	41	6155	7.22	7.23	10.24
	45	6175	7.22	7.16	10.2
	49	6195	7.25	7.3	10.29
	53	6215	7.21	7.19	10.21
	57	6235	7.3	7.16	10.24
	61	6255	7.31	7.2	10.27
	65	6275	7.35	7.26	10.32
	69	6295	7.25	7.28	10.28
	73	6315	7.31	7.35	10.34
	77	6335	7.3	7.3	10.31
	81	6355	7.29	7.16	10.24
	85	6375	7.16	7.3	10.24
	89	6395	7.17	7.26	10.23
	93	6415	7.17	7.25	10.22
802.11n HT20	1	5955	7.16	7.13	10.16
	5	5975	7.14	7.15	10.16
	9	5995	7.11	7.2	10.17
	13	6015	7.06	7.03	10.06
	17	6035	7.18	7.12	10.16
	21	6055	7.2	7.17	10.2
	25	6075	7.19	7.12	10.17
	29	6095	7.2	7.12	10.17
	33	6115	7.16	7.15	10.17
	37	6135	7.05	7.04	10.06
	1	5955	7.33	7.23	10.29
	5	5975	7.22	7.22	10.23
802.11ax HE20	9	5995	7.29	7.22	10.27
	13	6015	7.27	7.3	10.3
	17	6035	7.3	7.34	10.33
	21	6055	7.24	7.25	10.26
	25	6075	7.19	7.18	10.2
	29	6095	7.34	7.22	10.29
	33	6115	7.24	7.22	10.24
	37	6135	7.17	7.2	10.2
	41	6155	7.2	7.24	10.23
	45	6175	7.25	7.29	10.28
	49	6195	7.28	7.15	10.23
	53	6215	7.3	7.22	10.27
	57	6235	7.31	7.28	10.31
	61	6255	7.18	7.31	10.26
	65	6275	7.33	7.16	10.26
	69	6295	7.22	7.32	10.28
	73	6315	7.3	7.19	10.26
	77	6335	7.21	7.2	10.22
	81	6355	7.17	7.17	10.18
	85	6375	7.34	7.18	10.27
	89	6395	7.34	7.24	10.3
	93	6415	7.33	7.26	10.31
802.11ax HE40	3	5965	6.8	6.83	9.83
	11	6005	6.69	6.85	9.78
	19	6045	6.82	6.85	9.85
	27	6085	6.74	6.7	9.73
	35	6125	6.85	6.74	9.81
	43	6165	6.78	6.65	9.73
	51	6205	6.68	6.76	9.73
	59	6245	6.67	6.85	9.77
	67	6285	6.73	6.74	9.75
	75	6325	6.85	6.81	9.84
	83	6365	6.79	6.69	9.75
	91	6405	6.78	6.77	9.79
802.11ax HE80	7	5985	6.85	6.79	9.83
	23	6065	6.85	6.77	9.82
	39	6145	6.69	6.82	9.77
	55	6225	6.78	6.7	9.75
	71	6305	6.71	6.8	9.77
802.11ax HE160	87	6385	6.75	6.85	9.81
	15	6025	6.8	6.84	9.83
	47	6185	6.8	6.7	9.76
	79	6345	6.84	6.71	9.79

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	7.34
	101	6455	7.45
	105	6475	7.38
	109	6495	7.44
	113	6515	7.37
	117	6535	7.39
802.11ax HE20	97	6435	7.17
	101	6455	7.28
	105	6475	7.29
	109	6495	7.19
	113	6515	7.22
	117	6535	7.16
802.11ax HE40	99	6445	6.77
	107	6485	6.79
	115	6525	6.71
802.11ax HE80	103	6465	6.73
	119	6545	6.81
802.11ax HE160	111	6505	6.73

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	7.37
	101	6455	7.44
	105	6475	7.33
	109	6495	7.35
	113	6515	7.43
	117	6535	7.41
802.11ax HE20	97	6435	7.19
	101	6455	7.21
	105	6475	7.33
	109	6495	7.25
	113	6515	7.35
	117	6535	7.18
802.11ax HE40	99	6445	6.7
	107	6485	6.69
	115	6525	6.76
802.11ax HE80	103	6465	6.72
	119	6545	6.73
802.11ax HE160	111	6505	6.7

WLAN Conducted Power (QCNFA765 DBS ON)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	7.16	7.29	10.24
	101	6455	7.48	7.31	10.41
	105	6475	7.22	7.17	10.21
	109	6495	7.31	7.2	10.27
	113	6515	7.29	7.26	10.29
	117	6535	7.17	7.25	10.22
802.11ax HE20	97	6435	7.32	7.34	10.34
	101	6455	7.25	7.23	10.25
	105	6475	7.28	7.16	10.23
	109	6495	7.25	7.32	10.3
	113	6515	7.19	7.2	10.21
	117	6535	7.18	7.19	10.2
802.11ax HE40	99	6445	6.85	6.82	9.85
	107	6485	6.69	6.77	9.74
	115	6525	6.76	6.66	9.72
802.11ax HE80	103	6465	6.78	6.79	9.8
	119	6545	6.71	6.85	9.79
802.11ax HE160	111	6505	6.66	6.72	9.7

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	121	6555	7.26
	125	6575	7.18
	129	6595	7.19
	133	6615	7.32
	137	6635	7.21
	141	6655	7.33
	145	6675	7.22
	149	6695	7.22
	153	6715	7.18
	157	6735	7.17
	161	6755	7.27
	165	6775	7.21
	169	6795	7.3
	173	6815	7.27
	177	6835	7.22
	181	6855	7.25
	185	6875	7.17
802.11ax HE20	121	6555	7.27
	125	6575	7.16
	129	6595	7.31
	133	6615	7.22
	137	6635	7.23
	141	6655	7.28
	145	6675	7.27
	149	6695	7.16
	153	6715	7.31
	157	6735	7.15
	161	6755	7.27
	165	6775	7.18
	169	6795	7.17
	173	6815	7.31
	177	6835	7.25
	181	6855	7.21
	185	6875	7.23
802.11ax HE40	123	6565	6.73
	131	6605	6.76
	139	6645	6.8
	147	6685	6.65
	155	6725	6.83
	163	6765	6.75
	171	6805	6.72
	179	6845	6.83
	187	6885	6.75
802.11ax HE80	135	6625	6.79
	151	6705	6.85
	167	6785	6.79
802.11ax HE160	183	6865	6.75
	143	6665	6.67
	175	6825	6.77

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	121	6555	7.31
	125	6575	7.31
	129	6595	7.27
	133	6615	7.17
	137	6635	7.19
	141	6655	7.31
	145	6675	7.25
	149	6695	7.2
	153	6715	7.35
	157	6735	7.21
	161	6755	7.26
	165	6775	7.34
	169	6795	7.19
	173	6815	7.16
	177	6835	7.28
	181	6855	7.25
	185	6875	7.22
802.11ax HE20	121	6555	7.23
	125	6575	7.21
	129	6595	7.17
	133	6615	7.21
	137	6635	7.3
	141	6655	7.34
	145	6675	7.23
	149	6695	7.26
	153	6715	7.3
	157	6735	7.33
	161	6755	7.28
	165	6775	7.34
	169	6795	7.34
	173	6815	7.32
	177	6835	7.15
	181	6855	7.33
	185	6875	7.31
802.11ax HE40	123	6565	6.74
	131	6605	6.83
	139	6645	6.72
	147	6685	6.84
	155	6725	6.8
	163	6765	6.68
	171	6805	6.72
	179	6845	6.66
802.11ax HE80	187	6885	6.85
	135	6625	6.85
	151	6705	6.85
	167	6785	6.84
802.11ax HE160	183	6865	6.74
	143	6665	6.82
	175	6825	6.84

WLAN Conducted Power (QCNFA765 DBS ON)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	121	6555	7.2	7.3	10.26
	125	6575	7.3	7.32	10.32
	129	6595	7.19	7.23	10.22
	133	6615	7.32	7.32	10.33
	137	6635	7.31	7.27	10.3
	141	6655	7.26	7.2	10.24
	145	6675	7.31	7.29	10.31
	149	6695	7.19	7.29	10.25
	153	6715	7.26	7.2	10.24
	157	6735	7.31	7.23	10.28
	161	6755	7.27	7.16	10.23
	165	6775	7.22	7.17	10.21
	169	6795	7.21	7.19	10.21
	173	6815	7.34	7.2	10.28
	177	6835	7.15	7.27	10.22
	181	6855	7.22	7.25	10.25
	185	6875	7.28	7.15	10.23
802.11ax HE20	121	6555	7.23	7.17	10.21
	125	6575	7.29	7.32	10.32
	129	6595	7.15	7.24	10.21
	133	6615	7.17	7.32	10.26
	137	6635	7.24	7.31	10.29
	141	6655	7.3	7.17	10.25
	145	6675	7.18	7.19	10.2
	149	6695	7.29	7.2	10.26
	153	6715	7.18	7.25	10.23
	157	6735	7.25	7.23	10.25
	161	6755	7.33	7.29	10.32
	165	6775	7.29	7.15	10.23
	169	6795	7.26	7.28	10.28
	173	6815	7.31	7.31	10.32
	177	6835	7.34	7.16	10.26
	181	6855	7.27	7.15	10.22
	185	6875	7.24	7.18	10.22
802.11ax HE40	123	6565	6.75	6.66	9.72
	131	6605	6.85	6.68	9.78
	139	6645	6.75	6.72	9.75
	147	6685	6.85	6.85	9.86
	155	6725	6.73	6.74	9.75
	163	6765	6.84	6.77	9.82
	171	6805	6.68	6.74	9.72
	179	6845	6.66	6.81	9.75
802.11ax HE80	187	6885	6.7	6.65	9.69
	135	6625	6.77	6.78	9.79
	151	6705	6.8	6.71	9.77
	167	6785	6.81	6.83	9.83
802.11ax HE160	183	6865	6.67	6.76	9.73
	143	6665	6.69	6.85	9.78
	175	6825	6.71	6.71	9.72

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	7.24
	193	6915	7.18
	197	6935	7.31
	201	6955	7.29
	205	6975	7.22
	209	6995	7.17
	213	7015	7.15
	217	7035	7.35
	221	7055	7.26
	225	7075	7.16
	229	7095	7.23
	233	7115	7.17
	189	6895	7.23
802.11ax HE20	193	6915	7.2
	197	6935	7.34
	201	6955	7.32
	205	6975	7.15
	209	6995	7.28
	213	7015	7.17
	217	7035	7.21
	221	7055	7.2
	225	7075	7.3
	229	7095	7.2
	233	7115	7.17
802.11ax HE40	195	6925	6.79
	203	6965	6.66
	211	7005	6.68
	219	7045	6.85
	227	7085	6.67
802.11ax HE80	199	6945	6.73
	215	7025	6.84
802.11ax HE160	207	6985	6.74

WLAN Conducted Power (QCNFA765 DBS ON)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	7.17
	193	6915	7.32
	197	6935	7.33
	201	6955	7.15
	205	6975	7.17
	209	6995	7.29
	213	7015	7.27
	217	7035	7.3
	221	7055	7.24
	225	7075	7.28
	229	7095	7.3
	233	7115	7.17
	189	6895	7.16
802.11ax HE20	193	6915	7.2
	197	6935	7.19
	201	6955	7.27
	205	6975	7.19
	209	6995	7.17
	213	7015	7.17
	217	7035	7.18
	221	7055	7.16
	225	7075	7.23
	229	7095	7.18
	233	7115	7.24
802.11ax HE40	195	6925	6.76
	203	6965	6.78
	211	7005	6.8
	219	7045	6.71
	227	7085	6.7
802.11ax HE80	199	6945	6.75
	215	7025	6.69
802.11ax HE160	207	6985	6.79

WLAN Conducted Power (QCNFA765 DBS ON)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	7.23	7.17	10.21
	193	6915	7.3	7.34	10.33
	197	6935	7.19	7.21	10.21
	201	6955	7.26	7.25	10.27
	205	6975	7.26	7.24	10.26
	209	6995	7.21	7.27	10.25
	213	7015	7.29	7.24	10.28
	217	7035	7.23	7.23	10.24
	221	7055	7.34	7.2	10.28
	225	7075	7.23	7.27	10.26
	229	7095	7.35	7.17	10.27
	233	7115	7.33	7.26	10.31
	189	6895	7.34	7.16	10.26
802.11ax HE20	193	6915	7.35	7.16	10.27
	197	6935	7.18	7.15	10.18
	201	6955	7.23	7.35	10.3
	205	6975	7.31	7.19	10.26
	209	6995	7.29	7.33	10.32
	213	7015	7.33	7.28	10.32
	217	7035	7.2	7.3	10.26
	221	7055	7.35	7.3	10.34
	225	7075	7.2	7.32	10.27
	229	7095	7.21	7.18	10.21
	233	7115	7.15	7.27	10.22
	195	6925	6.78	6.84	9.82
	203	6965	6.82	6.79	9.82
802.11ax HE40	211	7005	6.75	6.72	9.75
	219	7045	6.74	6.67	9.72
	227	7085	6.83	6.78	9.82
	199	6945	6.84	6.82	9.84
802.11ax HE80	215	7025	6.8	6.7	9.76
802.11ax HE160	207	6985	6.83	6.69	9.77

Annex F. SAR and Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.

Body SAR Test Result DBS Off

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	-0.05	0.031	0.03
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	0.02	0.033	0.04
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0.03	0.204	0.21
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0.05	0.236	0.24
1	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0.16	1.12	1.14
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0	<0.001	0.00
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	-0.02	0.13	0.13
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0.01	0.298	0.30
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0.01	0.06	0.06
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	-0.02	0.156	0.18
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	0.15	0.349	0.41
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	-0.01	0.142	0.17
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	0.14	0.752	0.89
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	22.00	21.29	1.18	0.03	0.051	0.06
	WLAN2.4G	802.11b	Top Side	0	1	1	Ant 0	w/o	w/o	100.00	1.00	18.00	17.90	1.02	-0.01	0.999	1.02
	WLAN2.4G	802.11b	Top Side	0	11	1	Ant 0	w/o	w/o	100.00	1.00	18.00	17.88	1.03	-0.16	0.92	0.95
	WLAN2.4G	802.11b	Top Side	0	12	1	Ant 0	w/o	w/o	100.00	1.00	17.00	16.97	1.01	-0.06	0.814	0.82
	WLAN2.4G	802.11b	Top Side	0	13	1	Ant 0	w/o	w/o	100.00	1.00	14.50	14.40	1.02	-0.02	0.412	0.42
	WLAN2.4G	802.11b	Top Side	0	1	1	Ant 0+1	w/o	w/o	100.00	1.00	21.00	20.45	1.14	-0.03	0.676	0.77
	WLAN2.4G	802.11b	Top Side	0	11	1	Ant 0+1	w/o	w/o	100.00	1.00	21.00	20.19	1.21	-0.15	0.628	0.76
	WLAN2.4G	802.11b	Top Side	0	12	1	Ant 0+1	w/o	w/o	100.00	1.00	20.00	19.54	1.11	0.12	0.511	0.57
	WLAN2.4G	802.11b	Top Side	0	13	1	Ant 0+1	w/o	w/o	100.00	1.00	17.50	16.83	1.17	-0.01	0.259	0.30
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0	w/o	w/	100.00	1.00	19.00	18.91	1.02	-0.18	0.056	0.06
	WLAN2.4G	802.11b	Top Side	0	6	2	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0.09	0.974	0.99
	WLAN2.4G	802.11b	Top Side	0	1	2	Ant 0	w/o	w/o	100.00	1.00	18.00	17.90	1.02	-0.09	0.876	0.89
	WLAN2.4G	802.11b	Top Side	0	11	2	Ant 0	w/o	w/o	100.00	1.00	18.00	17.88	1.03	0.06	0.813	0.84
	WLAN2.4G	802.11b	Top Side	0	12	2	Ant 0	w/o	w/o	100.00	1.00	17.00	16.97	1.01	-0.05	0.661	0.67
	WLAN2.4G	802.11b	Top Side	0	13	2	Ant 0	w/o	w/o	100.00	1.00	14.50	14.40	1.02	0.13	0.335	0.34
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	19.00	18.91	1.02	0.05	1.09	1.11

Body SAR Test Result DBS Off

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	10	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0.11	0.439	0.44
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0.05	0.162	0.16
	WLAN5.3G	802.11a	Top Side	15	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0.02	0.579	0.58
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	0.03	0.24	0.24
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	-0.1	0.708	0.71
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	13.00	12.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	-0.1	0.324	0.34
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	-0.13	0.638	0.68
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	0.02	0.064	0.07
	WLAN5.3G	802.11a	Top Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	-0.06	0.886	0.94
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.75	1.06	0.05	0.078	0.08
	WLAN5.3G	802.11n HT40	Rear Face	0	54	1	Ant 0	w/	w/o	98.90	1.01	14.50	14.41	1.02	0.03	0.6	0.62
	WLAN5.3G	802.11n HT40	Top Side	0	54	1	Ant 0	w/	w/o	98.90	1.01	14.50	14.41	1.02	0.02	0.98	1.01
	WLAN5.3G	802.11a	Top Side	0	52	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.73	1.06	0.08	0.797	0.84
	WLAN5.3G	802.11a	Top Side	0	60	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.48	1.13	0.01	0.739	0.84
	WLAN5.3G	802.11a	Top Side	0	64	1	Ant 0+1	w/o	w/o	100.00	1.00	16.00	15.32	1.17	0.18	0.682	0.80
2	WLAN5.3G	802.11n HT40	Top Side	0	62	1	Ant 0	w/	w/o	98.90	1.01	14.00	13.99	1.00	-0.03	1.13	1.14
	WLAN5.3G	802.11n HT40	Top Side	0	62	1	Ant 0	w/	w/	98.90	1.01	14.00	13.99	1.00	0.05	0.126	0.13
	WLAN5.3G	802.11n HT40	Top Side	0	62	2	Ant 0	w/	w/o	98.90	1.01	14.00	13.99	1.00	-0.02	0.983	0.99
	WLAN5.3G	802.11n HT40	Top Side	0	54	2	Ant 0	w/	w/o	98.90	1.01	14.50	14.41	1.02	-0.06	0.916	0.94
	WLAN5.3G	802.11n HT40	Top Side	0	62	1	Ant 0	w/	w/o	98.90	1.01	14.00	13.99	1.00	0.02	1.06	1.07

Body SAR Test Result DBS Off

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.6G	802.11a	Bottom for Laptop	0	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom for Laptop	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom for Laptop	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	10	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	-0.01	0.435	0.44
	WLAN5.6G	802.11a	Left Side	0	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	0	<0.001	0.00
	WLAN5.6G	802.11a	Right Side	0	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	0.16	0.35	0.36
	WLAN5.6G	802.11a	Top Side	15	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	0.15	0.573	0.58
	WLAN5.6G	802.11a	Bottom Side	0	144	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.41	1.02	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	0.05	0.278	0.28
	WLAN5.6G	802.11a	Left Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	-0.03	0.743	0.74
	WLAN5.6G	802.11a	Right Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	12.00	11.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	-0.12	0.32	0.34
	WLAN5.6G	802.11a	Left Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0.02	0.512	0.54
	WLAN5.6G	802.11a	Right Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0.13	0.112	0.12
3	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0.14	1.12	1.19
	WLAN5.6G	802.11a	Bottom Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	144	1	Ant 0	w/	w/o	100.00	1.00	12.00	11.97	1.01	0.03	0.21	0.21
	WLAN5.6G	802.11a	Top Side	0	144	1	Ant 0	w/	w/o	100.00	1.00	12.00	11.97	1.01	0.04	0.698	0.70
	WLAN5.6G	802.11a	Top Side	0	100	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.24	1.19	-0.16	0.931	1.11
	WLAN5.6G	802.11a	Top Side	0	116	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.38	1.15	0.1	0.97	1.12
	WLAN5.6G	802.11a	Top Side	0	120	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.61	1.09	-0.07	0.99	1.08
	WLAN5.6G	802.11a	Top Side	0	124	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.71	1.07	0.13	1.09	1.17
	WLAN5.6G	802.11a	Top Side	0	140	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.15	1.22	-0.13	0.895	1.09
	WLAN5.6G	802.11a	Top Side	0	144	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.04	1.25	0.17	0.888	1.11
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0+1	w/o	w/	100.00	1.00	15.00	14.76	1.06	0.13	0.101	0.11
	WLAN5.6G	802.11a	Top Side	0	132	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	-0.16	0.919	0.97
	WLAN5.6G	802.11a	Top Side	0	100	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.24	1.19	0.04	0.719	0.86
	WLAN5.6G	802.11a	Top Side	0	116	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.38	1.15	0.08	0.782	0.90
	WLAN5.6G	802.11a	Top Side	0	120	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.61	1.09	-0.06	0.797	0.87
	WLAN5.6G	802.11a	Top Side	0	124	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.71	1.07	0.11	0.873	0.93
	WLAN5.6G	802.11a	Top Side	0	140	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.15	1.22	-0.14	0.722	0.88
	WLAN5.6G	802.11a	Top Side	0	144	2	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.04	1.25	-0.01	0.686	0.86
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	15.00	14.76	1.06	0.03	1.07	1.13

Body SAR Test Result DBS Off

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	0	<0.001	0.00
	WLAN5.8G	802.11a	Rear Face	10	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0.1	0.476	0.48
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0.11	0.505	0.51
	WLAN5.8G	802.11a	Top Side	15	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	-0.19	0.641	0.64
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	17.50	17.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0.05	0.247	0.25
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0.04	0.633	0.63
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	11.00	10.99	1.00	0.02	0.077	0.08
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.1	0.224	0.26
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.05	0.322	0.37
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.09	0.117	0.13
4	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.11	0.771	0.89
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.01	0.053	0.06
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 0	w/	w/o	100.00	1.00	11.00	10.99	1.00	0.05	0.211	0.21
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0	w/	w/o	100.00	1.00	11.00	10.99	1.00	-0.09	0.73	0.73
	WLAN5.8G	802.11a	Top Side	0	149	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.24	1.19	-0.11	0.053	0.06
	WLAN5.8G	802.11a	Top Side	0	153	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.15	1.22	0.07	0.713	0.87
	WLAN5.8G	802.11a	Top Side	0	161	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.32	1.17	-0.12	0.698	0.82
	WLAN5.8G	802.11a	Top Side	0	165	1	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.33	1.17	0.11	0.744	0.87
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0+1	w/o	w/	100.00	1.00	14.00	13.38	1.15	0.11	0.064	0.07
	WLAN5.8G	802.11a	Top Side	0	157	2	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.38	1.15	-0.05	0.75	0.86
	WLAN5.8G	802.11a	Top Side	0	149	2	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.24	1.19	-0.08	0.714	0.85
	WLAN5.8G	802.11a	Top Side	0	153	2	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.15	1.22	0.12	0.698	0.85
	WLAN5.8G	802.11a	Top Side	0	161	2	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.32	1.17	-0.11	0.715	0.84
	WLAN5.8G	802.11a	Top Side	0	165	2	Ant 0+1	w/o	w/o	100.00	1.00	14.00	13.33	1.17	0.07	0.706	0.83
	BT	BDR	Bottom for Laptop	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0	<0.001	0.00
	BT	BDR	Rear Face	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0.04	0.028	0.05
	BT	BDR	Left Side	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0.01	0.06	0.10
	BT	BDR	Right Side	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0	<0.001	0.00
	BT	BDR	Top Side	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0	<0.001	0.00
	BT	BDR	Bottom Side	0	0	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.86	1.30	0	<0.001	0.00
5	BT	BDR	Left Side	0	39	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.45	1.43	-0.08	0.093	0.17
	BT	BDR	Left Side	0	78	1	Ant 1	w/o	w/o	77.20	1.30	16.00	14.07	1.56	-0.02	0.083	0.17
	BT	BDR	Left Side	0	39	1	Ant 1	w/o	w/	77.20	1.30	16.00	14.45	1.43	0	<0.001	0.00
	BT	BDR	Left Side	0	39	2	Ant 1	w/o	w/o	77.20	1.30	16.00	14.45	1.43	0.05	0.079	0.15

Body SAR Test Result DBS On

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0.12	0.042	0.04
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	0.01	0.047	0.05
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0.08	0.154	0.15
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0.02	0.173	0.17
6	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	-0.04	0.792	0.79
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0.18	0.135	0.14
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	-0.05	0.333	0.34
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 1	w/o	w/o	100.00	1.00	19.00	18.96	1.01	0.05	0.07	0.07
	WLAN2.4G	802.11b	Rear Face	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	0.11	0.162	0.16
	WLAN2.4G	802.11b	Left Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	0.02	0.385	0.39
	WLAN2.4G	802.11b	Right Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	-0.11	0.169	0.17
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	-0.04	0.778	0.78
	WLAN2.4G	802.11b	Bottom Side	0	6	1	Ant 0+1	w/o	w/o	100.00	1.00	19.50	19.49	1.00	0.05	0.078	0.08
	WLAN2.4G	802.11b	Top Side	0	1	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.38	1.03	0.11	0.743	0.77
	WLAN2.4G	802.11b	Top Side	0	11	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.29	1.05	0.1	0.616	0.65
	WLAN2.4G	802.11b	Top Side	0	12	1	Ant 0	w/o	w/o	100.00	1.00	16.50	16.33	1.04	0.02	0.493	0.51
	WLAN2.4G	802.11b	Top Side	0	13	1	Ant 0	w/o	w/o	100.00	1.00	14.50	14.40	1.02	-0.19	0.225	0.23
	WLAN2.4G	802.11b	Top Side	0	6	1	Ant 0	w/o	w/	100.00	1.00	16.50	16.49	1.00	0.08	0.029	0.03
	WLAN2.4G	802.11b	Top Side	0	6	2	Ant 0	w/o	w/o	100.00	1.00	16.50	16.49	1.00	0.06	0.746	0.75
																	-

Body SAR Test Result DBS On

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom for Laptop	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.09	0.194	0.19
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.09	0.526	0.53
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0.01	0.099	0.10
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0.09	0.342	0.35
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Rear Face	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0.1	0.18	0.18
	WLAN5.3G	802.11a	Left Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0.03	0.14	0.14
	WLAN5.3G	802.11a	Right Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0.11	0.606	0.61
	WLAN5.3G	802.11a	Bottom Side	0	56	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.94	1.01	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	52	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.48	1.13	0.08	0.597	0.67
	WLAN5.3G	802.11a	Top Side	0	60	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.55	1.11	0.06	0.603	0.67
7	WLAN5.3G	802.11a	Top Side	0	64	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.28	1.18	0.03	0.613	0.72
	WLAN5.3G	802.11a	Top Side	0	64	1	Ant 0+1	w/o	w/	100.00	1.00	13.00	12.28	1.18	0	<0.001	0.00
	WLAN5.3G	802.11a	Top Side	0	64	2	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.28	1.18	0	0.531	0.63
																	-

Body SAR Test Result DBS On

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.6G	802.11a	Bottom for Laptop	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom for Laptop	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom for Laptop	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.09	0.16	0.16
	WLAN5.6G	802.11a	Left Side	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Right Side	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.12	0.068	0.07
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.09	0.551	0.55
	WLAN5.6G	802.11a	Bottom Side	0	132	1	Ant 0	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0.08	0.12	0.12
	WLAN5.6G	802.11a	Left Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	-0.02	0.306	0.31
	WLAN5.6G	802.11a	Right Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Bottom Side	0	132	1	Ant 1	w/o	w/o	100.00	1.00	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11a	Rear Face	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0.05	0.239	0.26
	WLAN5.6G	802.11a	Left Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0.18	0.447	0.48
	WLAN5.6G	802.11a	Right Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	-0.12	0.108	0.12
8	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0.08	0.519	0.56
	WLAN5.6G	802.11a	Bottom Side	0	132	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0	<0.001	0.00
	WLAN5.6G	802.11a	Top Side	0	100	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.09	1.23	0.15	0.429	0.53
	WLAN5.6G	802.11a	Top Side	0	116	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.26	1.19	0.07	0.439	0.52
	WLAN5.6G	802.11a	Top Side	0	120	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.46	1.13	0.04	0.451	0.51
	WLAN5.6G	802.11a	Top Side	0	124	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.60	1.10	-0.02	0.445	0.49
	WLAN5.6G	802.11a	Top Side	0	140	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.17	1.21	-0.13	0.433	0.52
	WLAN5.6G	802.11a	Top Side	0	144	1	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.08	1.24	0.03	0.431	0.53
	WLAN5.6G	802.11a	Top Side	0	132	1	Ant 0+1	w/o	w/	100.00	1.00	13.00	12.67	1.08	0.11	0.074	0.08
	WLAN5.6G	802.11a	Top Side	0	132	2	Ant 0+1	w/o	w/o	100.00	1.00	13.00	12.67	1.08	0	0.452	0.49
																	-

Body SAR Test Result DBS On

System & Position																	
System & Position						DUT & Accessory				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom for Laptop	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	0	<0.001	0.00
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0.02	0.08	0.08
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0.03	0.042	0.04
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	-0.06	0.282	0.28
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 0	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0.09	0.114	0.11
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	-0.01	0.286	0.29
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 1	w/o	w/o	100.00	1.00	9.00	8.99	1.00	0	<0.001	0.00
	WLAN5.8G	802.11a	Rear Face	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	-0.03	0.085	0.10
	WLAN5.8G	802.11a	Left Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	0.06	0.125	0.15
	WLAN5.8G	802.11a	Right Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	-0.04	0.042	0.05
9	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	0.06	0.301	0.36
	WLAN5.8G	802.11a	Bottom Side	0	157	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	0	<0.001	0.00
	WLAN5.8G	802.11a	Top Side	0	149	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.12	1.22	0.14	0.251	0.31
	WLAN5.8G	802.11a	Top Side	0	153	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.21	1.20	-0.01	0.28	0.34
	WLAN5.8G	802.11a	Top Side	0	161	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.09	1.23	-0.13	0.276	0.34
	WLAN5.8G	802.11a	Top Side	0	165	1	Ant 0+1	w/o	w/o	100.00	1.00	12.00	10.99	1.26	-0.1	0.271	0.34
	WLAN5.8G	802.11a	Top Side	0	157	1	Ant 0+1	w/o	w/	100.00	1.00	12.00	11.24	1.19	0	<0.001	0.00
	WLAN5.8G	802.11a	Top Side	0	157	2	Ant 0+1	w/o	w/o	100.00	1.00	12.00	11.24	1.19	0	0.236	0.28
																	-
12	RFID	ASK	Rear Face	0	13.56	1	-	-	-	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Left Side	0	13.56	1	-	-	-	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Right Side	0	13.56	1	-	-	-	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Top Side	0	13.56	1	-	-	-	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Bottom Side	0	13.56	1	-	-	-	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Rear Face	0	13.56	2	-	-	-	-	1.00	-	-	1	0	<0.001	0.00

SAR and Power Density Test Result DBS Off

System & Position						DUT & Accessory				SAR										Power Density									
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m ²]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm ²]	Power Drift [dB]	Normal psPD [W/m ²]	Scaled Normal psPD [W/m ²]	Total psPD [W/m ²]	Scaled Total psPD [W/m ²]	
		UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Rear Face	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	-0.05	0.202	0.20	1.9	1.92									
		UNII-6	802.11a	Left Side	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Right Side	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	0.08	0.097	0.10	0.92	0.93									
		UNII-6	802.11a	Top Side	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	-0.09	0.411	0.42	3.87	3.91									
		UNII-6	802.11a	Bottom Side	0	101	1	Ant 0	w/o	w/o	100	1.00	11.0	10.96	1.01	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Rear Face	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	-0.1	0.063	0.06	0.602	0.61									
		UNII-6	802.11a	Left Side	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	0.12	0.197	0.20	1.85	1.89									
		UNII-6	802.11a	Right Side	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Top Side	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Bottom Side	0	101	1	Ant 1	w/o	w/o	100	1.00	11.0	10.93	1.02	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Rear Face	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	-0.18	0.142	0.15	1.33	1.4									
		UNII-6	802.11a	Left Side	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	0.05	0.213	0.22	2	2.1									
		UNII-6	802.11a	Right Side	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	0.08	0.06	0.06	0.569	0.6									
		UNII-6	802.11a	Top Side	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	-0.06	0.244	0.26	2.3	2.42									
		UNII-6	802.11a	Bottom Side	0	101	1	Ant 0+1	w/o	w/o	100	1.00	14.0	13.79	1.05	0	<0.001	0.00	0	0									
		UNII-5	802.11a	Top Side	0	37	1	Ant 0	w/o	w/o	100	1.00	11.0	10.84	1.04	-0.04	0.165	0.17	1.55	1.61									
		UNII-7	802.11a	Top Side	0	165	1	Ant 0	w/o	w/o	100	1.00	11.0	10.85	1.04	0.08	0.21	0.22	1.98	2.06									
		UNII-8	802.11a	Top Side	0	193	1	Ant 0	w/o	w/o	100	1.00	11.0	10.85	1.04	-0.09	0.382	0.40	3.21	3.34									
10		UNII-6	802.11a	Top Side	0	97	1	Ant 0	w/o	w/o	100	1.00	11.0	10.85	1.04	0.05	0.452	0.47	3.88	4.04	0.25	4.60	1.545	4	-0.1	3.4	5.25	3.79	5.86
		UNII-6	802.11a	Top Side	0	105	1	Ant 0	w/o	w/o	100	1.00	11.0	10.79	1.05	-0.06	0.401	0.42	3.16	3.32									
		UNII-6	802.11a	Top Side	0	109	1	Ant 0	w/o	w/o	100	1.00	11.0	10.83	1.04	-0.16	0.364	0.38	3.07	3.19									
		UNII-6	802.11a	Top Side	0	113	1	Ant 0	w/o	w/o	100	1.00	11.0	10.81	1.04	-0.02	0.404	0.42	3.23	3.36									
		UNII-6	802.11a	Top Side	0	117	1	Ant 0	w/o	w/o	100	1.00	11.0	10.80	1.05	0.04	0.379	0.40	0.313	0.33									
		UNII-6	802.11a	Top Side	0	97	1	Ant 0	w/o	w/	100	1.00	11.0	10.85	1.04	0	<0.001	0.00	0	0									
		UNII-6	802.11a	Top Side	0	97	2	Ant 0	w/o	w/o	100	1.00	11.0	10.85	1.04	-0.19	0.412	0.43	3.39	3.53									

SAR and Power Density Test Result DBS On

System & Position						DUT & Accessory				SAR										Power Density								
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Handheld	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
	UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Bottom for Laptop	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Rear Face	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	-0.12	0.129	0.13	0.897	0.91									
	UNII-6	802.11a	Left Side	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Right Side	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	0.18	0.05	0.05	0.351	0.35									
	UNII-6	802.11a	Top Side	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	0	0.202	0.20	1.40	1.41									
	UNII-6	802.11a	Bottom Side	0	101	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.45	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Rear Face	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Left Side	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	-0.08	0.084	0.08	0.585	0.59									
	UNII-6	802.11a	Right Side	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Top Side	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Bottom Side	0	101	1	Ant 1	w/o	w/o	100.00	1.00	7.50	7.44	1.01	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Rear Face	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	-0.15	0.077	0.08	0.538	0.55									
	UNII-6	802.11a	Left Side	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	0.13	0.076	0.08	0.530	0.54									
	UNII-6	802.11a	Right Side	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0	0									
	UNII-6	802.11a	Top Side	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	-0.06	0.134	0.14	0.928	0.95									
	UNII-6	802.11a	Bottom Side	0	101	1	Ant 0+1	w/o	w/o	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0	0									
	UNII-5	802.11a	Top Side	0	21	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.36	1.03	0.17	0.137	0.14	0.951	0.98									
	UNII-7	802.11a	Top Side	0	141	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.33	1.04	0.12	0.109	0.11	0.756	0.79									
11	UNII-8	802.11a	Top Side	0	217	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.35	1.04	0.04	0.294	0.31	2.05	2.13	0.25	3.51	1.545	4	-0.09	1.63	2.52	1.75	2.7
	UNII-8	802.11a	Top Side	0	189	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.24	1.06	-0.04	0.228	0.24	1.59	1.69									
	UNII-8	802.11a	Top Side	0	193	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.18	1.08	0.09	0.226	0.24	1.58	1.7									
	UNII-8	802.11a	Top Side	0	197	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.31	1.04	-0.17	0.254	0.26	1.77	1.84									
	UNII-8	802.11a	Top Side	0	201	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.29	1.05	0.01	0.266	0.28	1.86	1.95									
	UNII-8	802.11a	Top Side	0	205	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.22	1.07	-0.06	0.246	0.26	1.72	1.84									
	UNII-8	802.11a	Top Side	0	209	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.17	1.08	-0.01	0.235	0.25	1.64	1.77									
	UNII-8	802.11a	Top Side	0	213	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.15	1.08	0	0.236	0.25	1.65	1.78									
	UNII-8	802.11a	Top Side	0	221	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.26	1.06	-0.03	0.242	0.26	1.69	1.79									
	UNII-8	802.11a	Top Side	0	225	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.16	1.08	-0.06	0.282	0.30	1.97	2.12									
	UNII-8	802.11a	Top Side	0	229	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.23	1.06	-0.06	0.271	0.29	1.89	2									
	UNII-8	802.11a	Top Side	0	233	1	Ant 0	w/o	w/o	100.00	1.00	7.50	7.17	1.08	0	0.224	0.24	1.56	1.69									
	UNII-8	802.11a	Top Side	0	217	1	Ant 0	w/o	w/	100.00	1.00	7.50	7.35	1.04	0	<0.001	0.00	0	0									
	UNII-8	802.11a	Top Side	0	217	2	Ant 0	w/o	w/o	100.00	1.00	7.50	7.35	1.04	-0.13	0.254	0.26	1.75	1.82									

Annex G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeat SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R01	WLAN2.4G	802.11b	Top Side	6	1.12	1.09	1.03
R02	WLAN5.3G	802.11n HT40	Top Side	62	1.13	1.06	1.07
R03	WLAN5.6G	802.11a	Top Side	132	1.12	1.07	1.05

Annex H. Analysis of Simultaneous Transmission SAR and Total Exposure Ratio

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WLAN 2.4G_Ant 0+RFID	Yes
B	WLAN 2.4G_Ant 1+RFID	Yes
C	WLAN 2.4G_Ant 0+1+RFID	Yes
D	WLAN 5G_Ant 0+RFID	Yes
E	WLAN 5G_Ant 1+RFID	Yes
F	WLAN 5G_Ant 0+1+RFID	Yes
G	BT Ant 1+RFID	Yes
H	WLAN 2.4G_Ant 0+BT_Ant 1+RFID	Yes
I	WLAN 5G_Ant 0+BT_Ant 1+RFID	Yes
J	WLAN 5G_Ant 0+1+BT_Ant 1+RFID	Yes
K	WLAN 6G_Ant 0+RFID	Yes
L	WLAN 6G_Ant 1+RFID	Yes
M	WLAN 6G_Ant 0+1+RFID	Yes
N	WLAN 6G_Ant 0+BT_Ant 1+RFID	Yes
O	WLAN 6G_Ant 0+1+BT_Ant 1+RFID	Yes

Notes

1. The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
2. Simultaneous TX Combination A can be covered by H
3. Simultaneous TX Combination C can be covered by P
4. Simultaneous TX Combination D can be covered by I
5. Simultaneous TX Combination F and G can be covered by J

Simultaneous Transmission SAR Evaluation (Body)																			
Position	1	2	3	4	5	6	7	8	9	10	11	B(2+11)	E(5+11)	H(1+10+11)	I(4+10+11)	J(6+10+11)	L(8+11)	N(7+10+11)	O(9+10+11)
	WLAN 2.4GHz Ant	WLAN 2.4GHz Ant	WLAN 2.4GHz Ant	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 1	Max BT Ant 1	Max WLAN	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg								
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg								
Bottom for Laptop	0.00	0.04	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rear Face	0.21	0.14	0.18	0.62	0.28	0.34	0.20	0.06	0.15	0.05	0.00	0.14	0.28	0.26	0.67	0.39	0.06	0.00	0.20
Left Side	0.00	0.34	0.41	0.00	0.74	0.68	0.00	0.20	0.22	0.17	0.00	0.34	0.74	0.17	0.17	0.85	0.20	0.17	0.39
Right Side	0.24	0.00	0.17	0.51	0.00	0.13	0.10	0.00	0.06	0.00	0.00	0.00	0.00	0.24	0.51	0.13	0.00	0.10	0.06
Top Side	1.14	0.00	0.89	1.14	0.00	1.19	0.47	0.00	0.26	0.00	0.00	0.00	0.00	1.14	1.14	1.19	0.00	0.47	0.26
Bottom Side	0.00	0.07	0.08	0.00	0.08	0.08	0.00	0.00	0.00	0.00	0.00	0.07	0.08	0.00	0.00	0.08	0.00	0.00	0.00

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WLAN 2.4G_Ant 0+RFID	Yes
B	WLAN 2.4G_Ant 1+RFID	Yes
C	WLAN 2.4G_Ant 0+1+RFID	Yes
D	WLAN 5G_Ant 0+RFID	Yes
E	WLAN 5G_Ant 1+RFID	Yes
F	WLAN 5G_Ant 0+1+RFID	Yes
G	BT Ant 1+RFID	Yes
H	WLAN 2.4G_Ant 0+BT_Ant 1+RFID	Yes
I	WLAN 5G_Ant 0+BT_Ant 1+RFID	Yes
J	WLAN 5G_Ant 0+1+BT_Ant 1+RFID	Yes
K	WLAN 6G_Ant 0+RFID	Yes
L	WLAN 6G_Ant 1+RFID	Yes
M	WLAN 6G_Ant 0+1+RFID	Yes
N	WLAN 6G_Ant 0+BT_Ant 1+RFID	Yes
O	WLAN 6G_Ant 0+1+BT_Ant 1+RFID	Yes
P	WLAN 2.4G_Ant 0+1 +WLAN5G_Ant 0+1+RFID	Yes
Q	WLAN 2.4G_Ant 0+1 +WLAN6G_Ant 0+1+RFID	Yes

Notes

1. Simultaneous TX Combination A can be covered by H
2. Simultaneous TX Combination C can be covered by P
3. Simultaneous TX Combination D can be covered by I
4. Simultaneous TX Combination F and G can be covered by J
5. Simultaneous TX Combination K can be covered by N
6. Simultaneous TX Combination M can be covered by O

Simultaneous Transmission SAR Evaluation (Body)																					
Position	1	2	3	4	5	6	7	8	9	10	11	B(2+11)	E(5+11)	H(1+10+11)	I(4+10+11)	J(6+10+11)	L(8+11)	N(7+10+11)	O(9+10+11)	P(3+6+11)	Q(3+9+11)
	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg
Bottom for Laptop	0.00	0.04	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.05
Rear Face	0.15	0.14	0.16	0.19	0.12	0.26	0.13	0.00	0.08	0.05	0.00	0.14	0.12	0.20	0.24	0.31	0.00	0.00	0.13	0.42	0.24
Left Side	0.00	0.34	0.39	0.00	0.35	0.48	0.00	0.08	0.08	0.17	0.00	0.34	0.35	0.17	0.17	0.65	0.08	0.17	0.25	0.87	0.47
Right Side	0.17	0.00	0.17	0.07	0.00	0.12	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.07	0.12	0.00	0.05	0.00	0.29	0.17
Top Side	0.79	0.00	0.78	0.55	0.00	0.72	0.31	0.00	0.14	0.00	0.00	0.00	0.00	0.79	0.55	0.72	0.00	0.31	0.14	1.50	0.92
Bottom Side	0.00	0.07	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08

Annex I. SAR to Peak Location Separation Ratio Analysis.

Since sum of simultaneous transmission SAR is less than the SAR limit for Body SAR_{1g} 1.6 W/kg
There is no requirement for SAR to Peak Location Separation Ratio Analysis.

Annex J. Calibration of Test Equipment List

Calibration of Test Equipment List are shown as below.

Equipment for SAR Test					
Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	CLA13	1018	Mar. 22, 2022	1 Year
System Validation Dipole	SPEAG	D2450V2	737	Aug. 26, 2021	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 19, 2021	2 Years
System Validation Dipole	SPEAG	D6.5GHzV2	1008	Sep. 24, 2021	1 Year
System Verification Source	SPEAG	5G Verification Source 10 GHz	1025	Jan. 17, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7537	Apr. 27, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Mar. 24, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7720	Mar. 21, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7736	May. 30, 2022	1 Year
E-Field Probe	SPEAG	EUmmWV4	9438	Jul. 18, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE3	579	Jun. 01, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE4	861	Mar. 23, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1585	Apr. 21, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1431	Feb. 23, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1698	Nov. 09, 2021	1 Year
Analog Signal Generator	R&S	SMA100B	104417	Oct. 22, 2021	1 Year
Mini-Circuits Wideband Amplifier	Mini-Circuits	ZVA-183-S+	434502031A	Jul. 09, 2022	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 04, 2022	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 05, 2022	1 Year
Universal Wireless Test Set	Anritsu	MT8870A	6201699387	Sep. 22, 2021	1 Year
Thermometer	YFE	YF-160A	150601220	May. 26, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May. 23, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS_VNA R140	0010917	May. 23, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAK-12	1164	Mar. 21, 2022	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4260	Jan. 13, 2022	1 Year
Spectrum Analyzer	Anritsu	MS2720T	1513085	May. 19, 2022	1 Year

Annex K. Considerations Related to Bluetooth for Setup and Testing

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

The duty factor of Bluetooth signal are shown as below.

<Time-domain plot for Bluetooth transmission signal>



Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = (9.97 - 7.1) / (10.82 - 7.1) = 77.15\%$$