

FCC Test Report

Equipment : Tablet PC
Brand Name : DELL
Model No. : T02E; T02E001
FCC ID : E2K-T02E001
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5250 MHz – 5350 MHz
5470 MHz – 5725 MHz
5725 MHz – 5850 MHz
FCC Classification : UNII
Applicant : Dell Inc.
Manufacturer : One Dell Way, Round Rock, Texas 78682, USA
Function : ☐ Outdoor AP; ☐ Indoor AP; ☐ Fixed P2P AP
☒ Portable Client

The product sample received on Aug. 12, 2014 and completely tested on Aug. 22, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information.....	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	The Worst Case Power Setting Parameter	10
2.3	The Worst Case Measurement Configuration.....	12
2.4	Test Setup Diagram	13
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	Emission Bandwidth	18
3.3	RF Output Power.....	24
3.4	Peak Power Spectral Density.....	30
3.5	Transmitter Bandedge Emissions	36
3.6	Transmitter Unwanted Emissions.....	42
3.7	Frequency Stability.....	163
4	TEST EQUIPMENT AND CALIBRATION DATA	165

Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.2	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Transmitter Bandedge Emissions	Complied
3.6	15.407(b)	Transmitter Unwanted Emissions	Complied
3.7	15.407(g)	Frequency Stability	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
5150-5250	a	5180-5240	36-48 [4]	1	11.54
5250-5350		5260-5320	52-64 [4]	1	11.74
5470-5725		5500-5700	100-140 [8]	1	11.19
5725-5850		5745-5825	149-165 [5]	1	11.07
5150-5250	n (HT20) ac (VHT20)	5180-5240	36-48 [4]	1 / 1	11.12/11.04
5250-5350		5260-5320	52-64 [4]	1 / 1	10.78/10.64
5470-5725		5500-5700	100-140 [8]	1 / 1	10.89/10.86
5725-5850		5745-5825	149-165 [5]	1 / 1	10.93/10.82
5150-5250	n (HT40) ac (VHT40)	5190-5230	38-46 [2]	1 / 1	11.23/11.20
5250-5350		5270-5310	54-62 [2]	1 / 1	10.69/10.62
5470-5725		5510-5670	102-134 [3]	1 / 1	10.91/10.84
5725-5850		5755-5795	151-159 [2]	1 / 1	11.14/11.14
5150-5250	ac (VHT80)	5210	48 [1]	1	10.82
5250-5350		5290	58 [1]	1	11.43
5470-5725		5530	106 [1]	1	11.38
5725-5850		5775	155 [1]	1	10.74

Note 1: RF output power specifies that Maximum Conducted Output Power.
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information		
Ant. Cat.	Ant. Type	Gain (dBi)
Integral	PIFA	2.44

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☐ Pre-Production ; ☒ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 95.00% - IEEE 802.11a	0.22
☒ 95.00% - IEEE 802.11n (HT20)	0.22
☒ 90.57% - IEEE 802.11n (HT40)	0.43
☒ 95.00% - IEEE 802.11ac (VHT20)	0.22
☒ 90.57% - IEEE 802.11ac (VHT40)	0.43
☒ 86.20% - IEEE 802.11ac (VHT80)	0.64

1.1.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☒ DC	
Type of DC Source	☒ External DC supply	☒ From Host System	☒ From Battery
Test Voltage	☒ Vnom (3.7 V)	☒ Vmax (4.3 V)	☒ Vmin (3.1 V)
Test Climatic	☒ Tnom (20°C)	☒ Tmax (50°C)	☒ Tmin (-20°C)

1.1.6 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment			
☐ Master			
☐ Slave with radar detection			
☒ Slave without radar detection			
Software / Firmware Version		Blackburn_wifi_qs-userdebug 4.4.4 KTU84P 93.4 dev-keys	
Communication Mode		☒ IP Based	☐ Frame Based
IEEE Std. 802.11	Frequency Range (MHz)	TPC (Transmit Power Control)	Passive Scan
a / n (HT20) / ac (VHT20)	☒ 5250-5350	No	Yes
n (HT40) / ac (VHT40)	☒ 5470-5725	No	Yes
ac (VHT80)	☐ 5600-5650	-	-

1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	DELL	Model Name	HA10USNM130
	Vendor	Chicony		
	Power Rating	I/P: 100-240V~50/60Hz 0.3A ; O/P: 5V $\overline{=}$ 2A		
Li-ion Battery	Brand Name	DELL	Model Name	K81RP
	Vendor	SIMPLO		
	Power Rating	21Wh, 3.7V $\overline{=}$		
USB Cable	Brand Name	--	Model Name	--

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction and Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook (For Mode 2 use)	DELL	E5530	DoC

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook (For Mode 2 use)	DELL	E5500	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 789033 D02 v01
- ♦ FCC KDB 644545 D03 v01
- ♦ FCC KDB 662911 v02r01
- ♦ FCC-14-30A1-UNII

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	25°C / 45%
RF Conducted		TH01-HY	Ian	21.5°C / 64%
Radiated Emission		03CH03-HY	Allen	25.8°C / 48%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 26dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Power density, conducted		±0.8 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.7 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a,6-54Mbps	1	6-54Mbps	6 Mbps
HT20,M0-7	1	MCS 0-7	MCS 0
HT40,M0-7	1	MCS 0-7	MCS 0
VHT20,M0-8	1	MCS 0-8	MCS 0
VHT40,M0-9	1	MCS 0-9	MCS 0
VHT80,M0-9	1	MCS 0-9	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)							
Test Software Version	DOS						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5180	5200	5240	5190	5230	5210
11a	1	11	11	11	-	-	-
HT20	1	11	11	10	-	-	-
HT40	1	-	-	-	11	11	-
VHT20	1	11	11	10	-	-	-
VHT40	1	-	-	-	11	11	-
VHT80	1	-	-	-	-	-	11

The Worst Case Power Setting Parameter (5250-5350MHz band)							
Test Software Version	DOS						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5260	5300	5320	5270	5310	5290
11a	1	11	11	11	-	-	-
HT20	1	11	11	12	-	-	-
HT40	1	-	-	-	11	11	-
VHT20	1	11	11	11	-	-	-
VHT40	1	-	-	-	11	11	-
VHT80	1	-	-	-	-	-	12

The Worst Case Power Setting Parameter (5470-5725MHz band)								
Test Software Version	DOS							
Modulation Mode	N _{TX}	Test Frequency (MHz)						
		NCB: 20MHz			NCB: 40MHz			NCB: 80MHz
		5500	5580	5700	5510	5550	5670	5530
11a	1	12	11	11	-	-	-	-
HT20	1	11	11	11	-	-	-	-
HT40	1	-	-	-	11	11	11	-
VHT20	1	11	11	11	-	-	-	-
VHT40	1	-	-	-	11	11	11	-
VHT80	1	-	-	-	-	-	-	12

The Worst Case Power Setting Parameter (5725-5850MHz band)								
Test Software Version	DOS							
Modulation Mode	N _{TX}	Test Frequency (MHz)						
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz	
		5745	5785	5825	5755	5795	5775	
11a	1	11	11	11	-	-	-	
HT20	1	11	11	11	-	-	-	
HT40	1	-	-	-	11	11	-	
VHT20	1	11	11	10	-	-	-	
VHT40	1	-	-	-	11	11	-	
VHT80	1	-	-	-	-	-	10	


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	EUT with AC power & Transmitter
2	EUT with USB Cable & Transmitter
The operating mode 2 is the worst case and it was record in this test report.	


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion, Transmitter Conducted Unwanted Emissions Transmitter Conducted Bandedge Emissions
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☐ EUT will be placed in fixed position.		
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.		
	☒ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. The worst planes is Z.		
Operating Mode < 1GHz	Operating Mode Description		
1	EUT with AC power & Transmitter		
2	EUT with USB Cable & Transmitter		
The operating mode 1 is the worst case and it was record in this test report.			
Operating Mode > 1GHz	Operating Mode Description		
1	EUT with AC power & Transmitter		
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

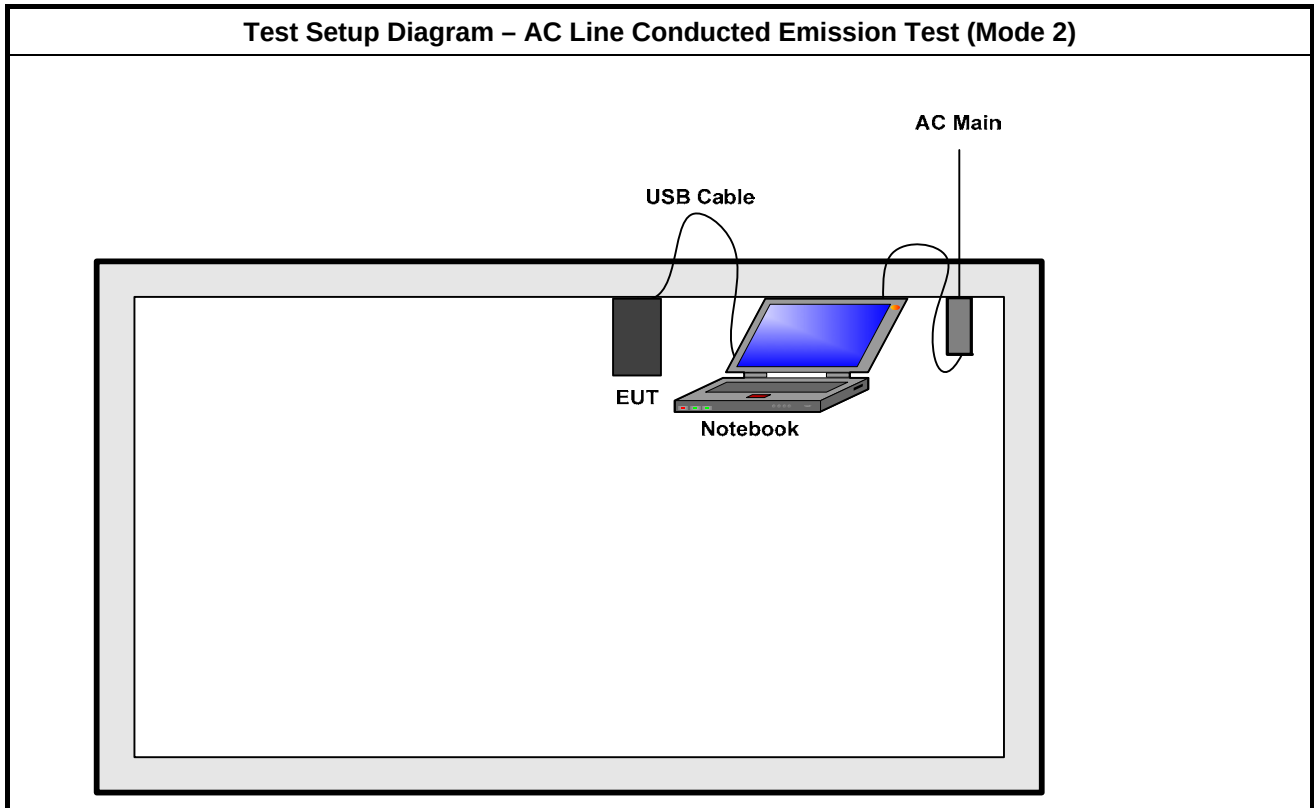

Test Setup Diagram - Radiated Test Below 1GHz (Mode 1)

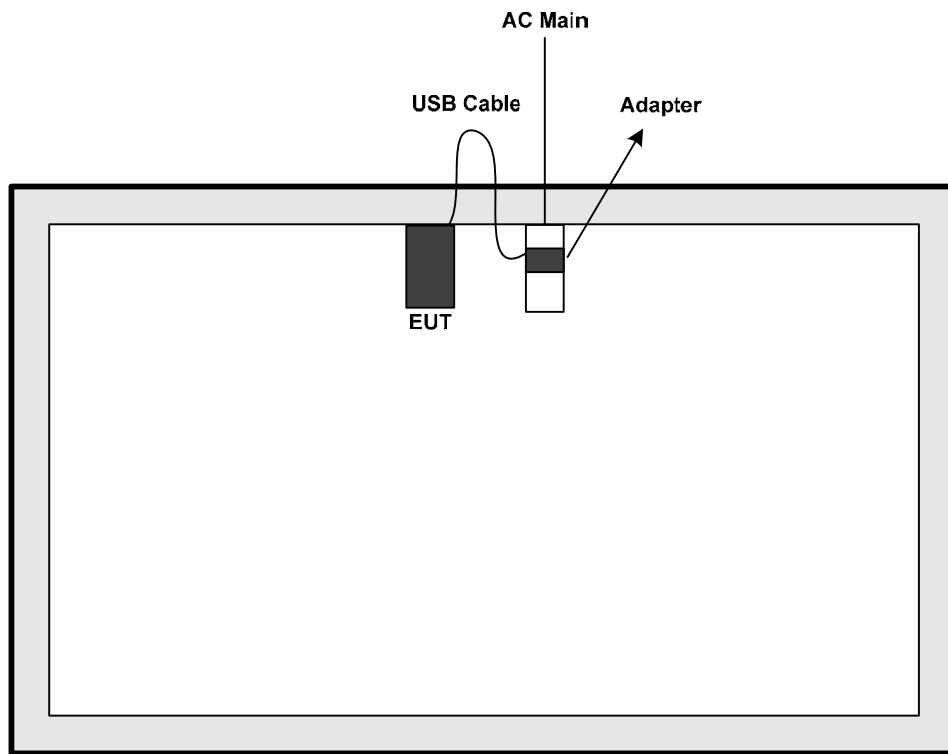

Test Setup Diagram - Radiated Test Above 1GHz (Mode 1)

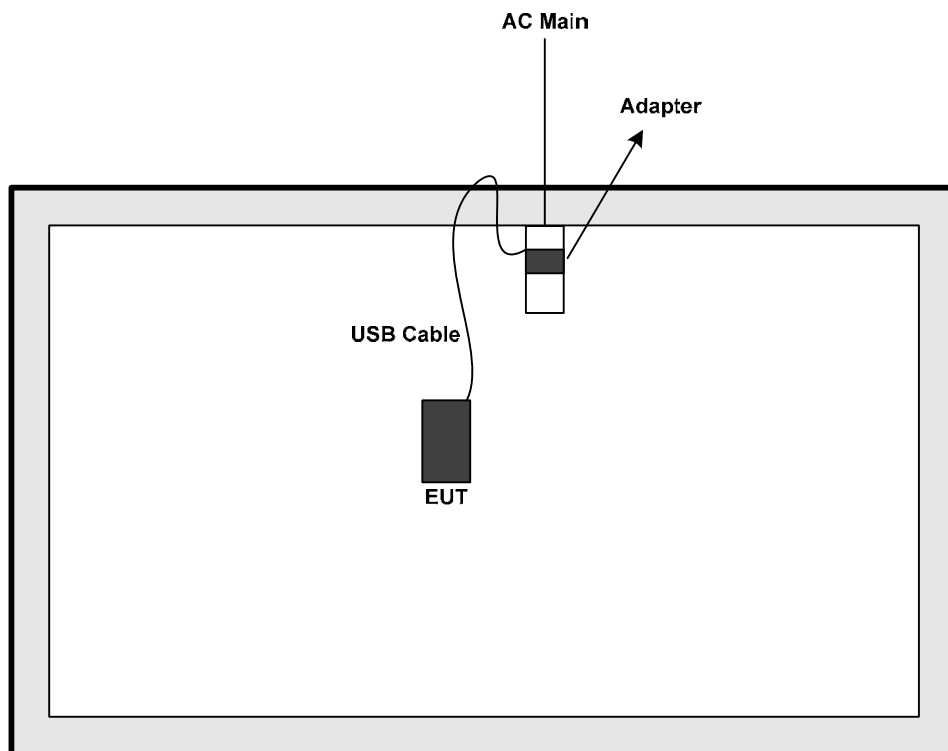

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

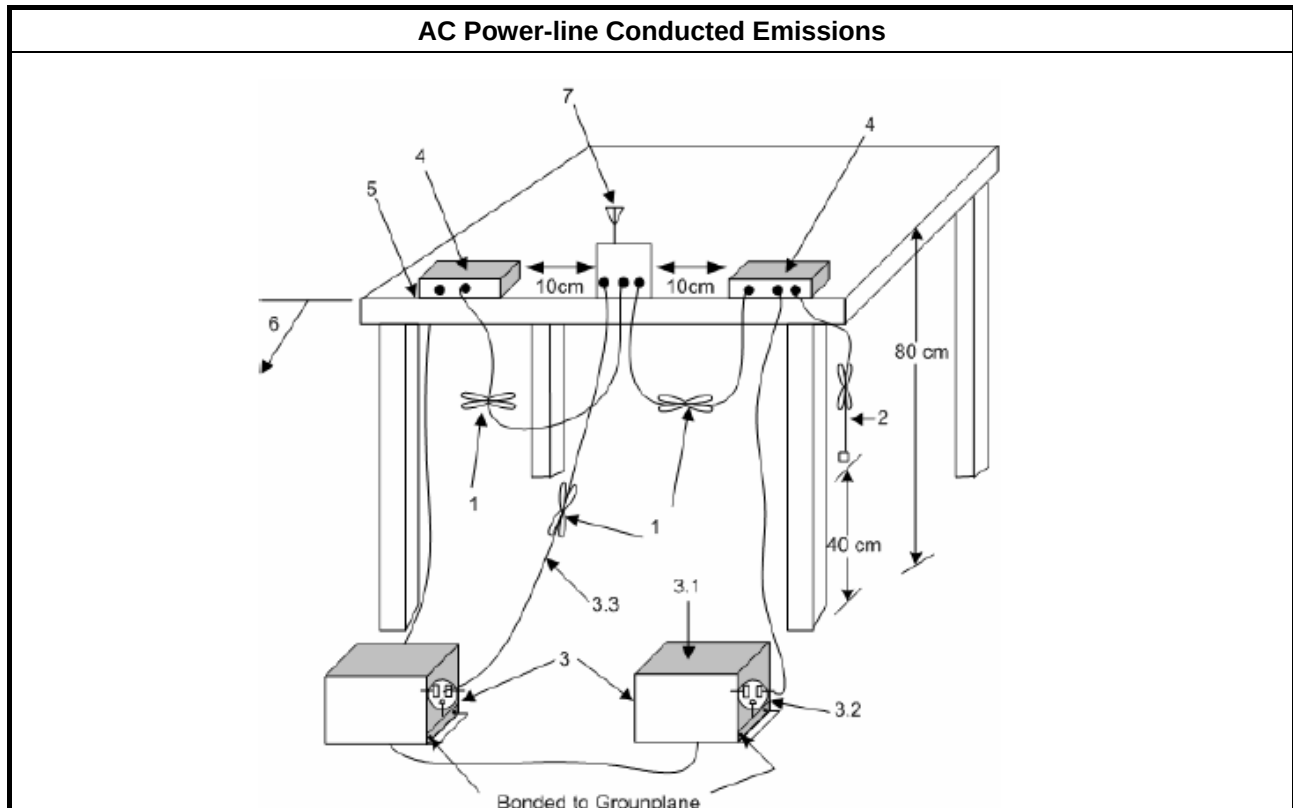


3.1.5 Test Result of AC Power-line Conducted Emissions

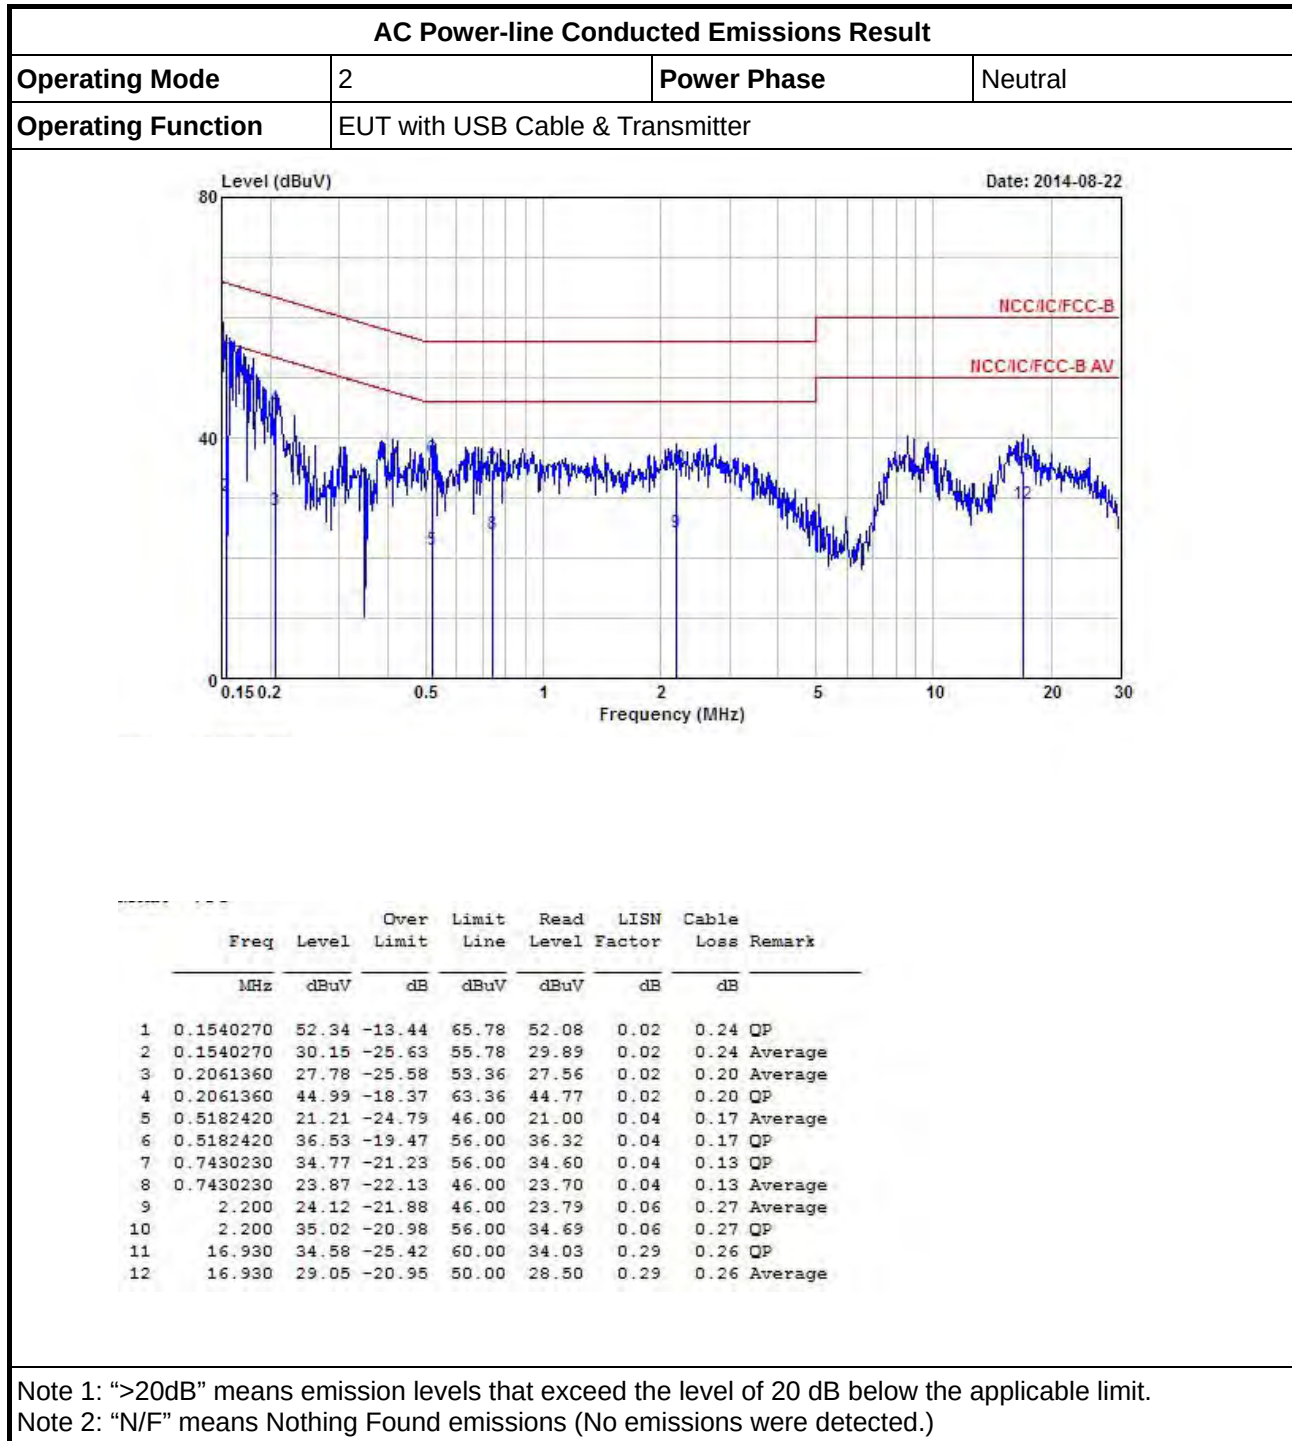

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	EUT with USB Cable & Transmitter		

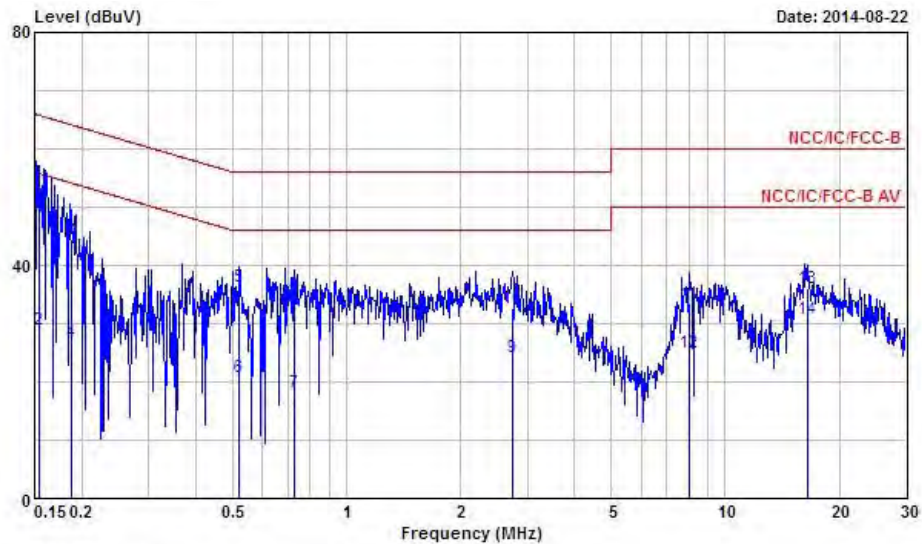

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1548450	53.14	-12.60	65.74	52.87	0.03	0.24	QP
2	0.1548450	28.93	-26.81	55.74	28.66	0.03	0.24	Average
3	0.1873850	44.52	-19.63	64.15	44.28	0.03	0.21	QP
4	0.1873850	26.78	-27.37	54.15	26.54	0.03	0.21	Average
5	0.5209950	36.35	-19.65	56.00	36.14	0.04	0.17	QP
6	0.5209950	20.75	-25.25	46.00	20.54	0.04	0.17	Average
7	0.7274420	18.23	-27.77	46.00	18.04	0.05	0.14	Average
8	0.7274420	35.01	-20.99	56.00	34.82	0.05	0.14	QP
9	2.750	24.31	-21.69	46.00	24.02	0.08	0.21	Average
10	2.750	32.71	-23.29	56.00	32.42	0.08	0.21	QP
11	8.060	33.44	-26.56	60.00	33.09	0.17	0.18	QP
12	8.060	25.07	-24.93	50.00	24.72	0.17	0.18	Average
13	16.490	35.96	-24.04	60.00	35.41	0.28	0.27	QP
14	16.490	30.67	-19.33	50.00	30.12	0.28	0.27	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 789033 D02 v01, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
☐	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

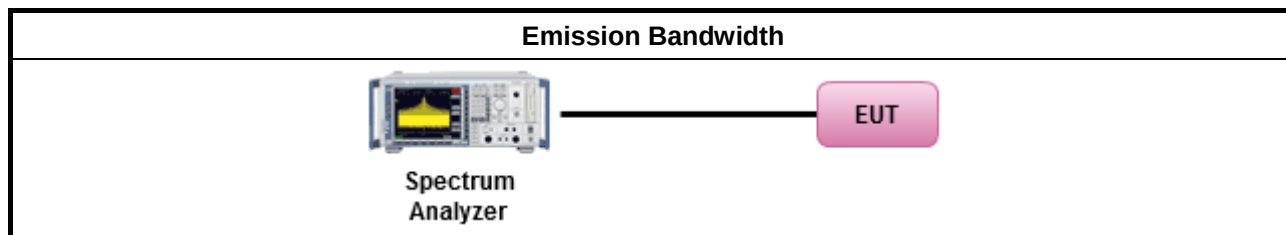

3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	26dB Bandwidth
11a	1	5180	16.51	20.50
11a	1	5200	16.66	20.57
11a	1	5240	17.09	21.12
HT20	1	5180	17.99	21.55
HT20	1	5200	17.84	21.00
HT20	1	5240	17.84	21.07
HT40	1	5190	36.62	40.48
HT40	1	5230	36.54	41.12
VHT20	1	5180	17.86	21.00
VHT20	1	5200	17.69	20.77
VHT20	1	5240	17.71	21.10
VHT40	1	5190	36.50	40.60
VHT40	1	5230	36.50	40.68
VHT80	1	5210	75.64	81.44
Result			Complied	


UNII Emission Bandwidth Result (5250-5350MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	26dB Bandwidth
11a	1	5260	17.19	21.07
11a	1	5300	16.84	20.52
11a	1	5320	16.61	20.65
HT20	1	5260	17.79	20.87
HT20	1	5300	17.84	21.02
HT20	1	5320	18.11	21.07
HT40	1	5270	36.50	40.64
HT40	1	5310	36.54	40.80
VHT20	1	5260	17.74	20.42
VHT20	1	5300	17.99	21.17
VHT20	1	5320	17.74	20.92
VHT40	1	5270	36.58	40.20
VHT40	1	5310	36.50	40.80
VHT80	1	5290	75.80	81.36
Result			Complied	

UNII Emission Bandwidth Result (5470-5725MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	26dB Bandwidth
11a	1	5500	16.71	21.00
11a	1	5580	17.31	21.50
11a	1	5700	17.06	21.05
HT20	1	5500	17.71	20.77
HT20	1	5580	17.96	21.00
HT20	1	5700	17.91	20.92
HT40	1	5510	36.50	40.72
HT40	1	5550	36.50	40.80
HT40	1	5670	36.62	40.52
VHT20	1	5500	18.11	21.22
VHT20	1	5580	18.04	21.12
VHT20	1	5700	17.79	21.12
VHT40	1	5510	36.50	40.44
VHT40	1	5550	36.50	40.24
VHT40	1	5670	36.46	40.88
VHT80	1	5530	75.80	81.20
Result			Complied	




UNII Emission Bandwidth Result (5725-5850MHz band)				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
11a	1	5745	16.46	16.53
11a	1	5785	16.47	16.53
11a	1	5825	16.47	16.35
HT20	1	5745	17.72	17.80
HT20	1	5785	17.69	17.56
HT20	1	5825	17.73	17.79
HT40	1	5755	36.22	35.64
HT40	1	5795	36.22	36.28
VHT20	1	5745	17.70	17.77
VHT20	1	5785	17.66	17.56
VHT20	1	5825	17.72	17.79
VHT40	1	5755	36.22	36.04
VHT40	1	5795	36.22	36.32
VHT80	1	5775	75.48	75.12
Limit			-	≥ 500 kHz
Result			Complied	

5150-5250MHz - Worst Emission 26Bandwidth Plots

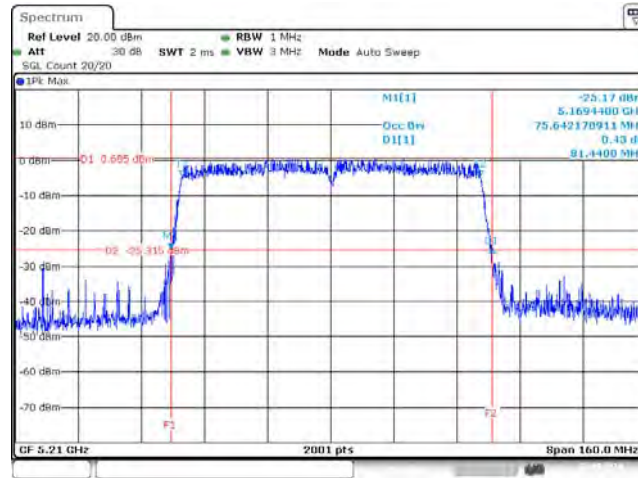


Date: 22.AUG.2014 20:27:59

5250-5350MHz - Worst Emission 26Bandwidth Plots

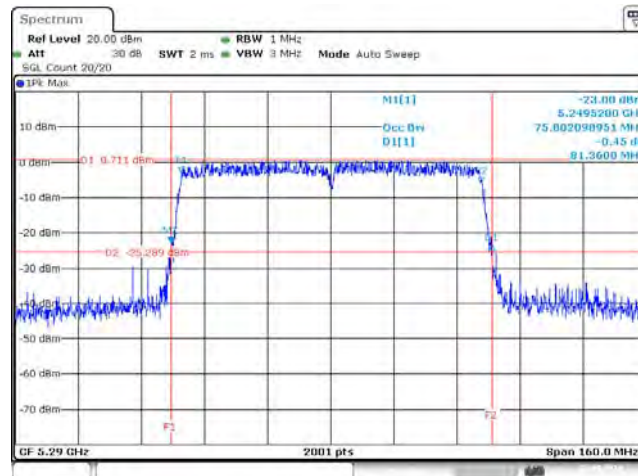

Date: 22.AUG.2014 20:29:20


5470-5725MHz - Worst Emission 26Bandwidth Plots

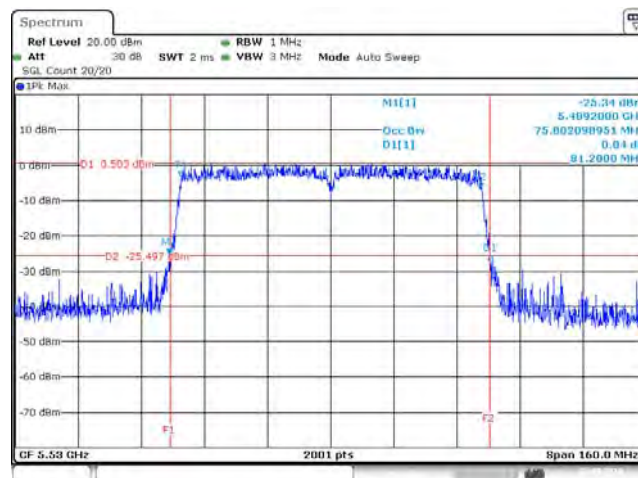

Date: 22.AUG.2014 20:30:16



5725-5850MHz - Worst Emission 6Bandwidth Plots

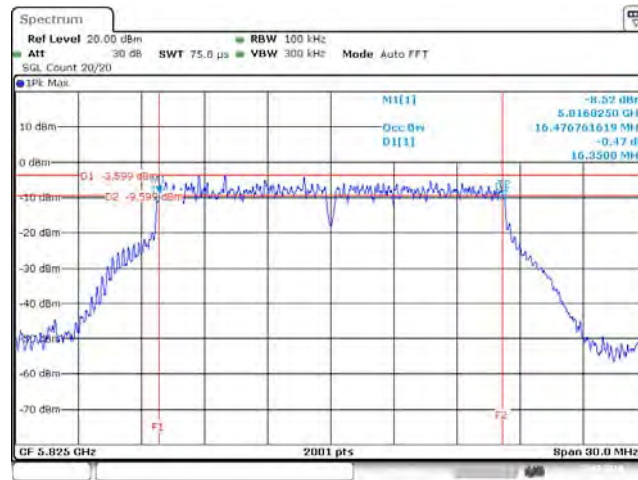

Date: 22.AUG.2014 15:32:12

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125 mW [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☒	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☒	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Conducted Output Power
	[duty cycle $\geq$ 98% or external video / power trigger]
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02 v01, clause E Method PM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

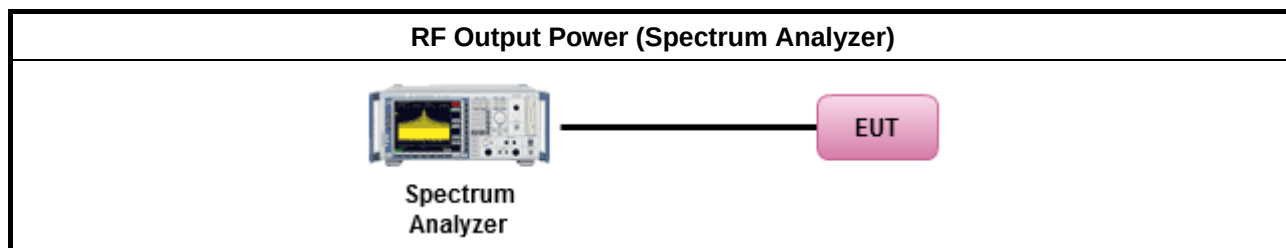

3.3.5 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power (5150-5250MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Output Power (dBm)	Antenna Gain (dBi)	Power Limit
11a	1	5180	11.05	2.44	24.00
11a	1	5200	11.19	2.44	24.00
11a	1	5240	11.54	2.44	24.00
HT20	1	5180	11.01	2.44	24.00
HT20	1	5200	11.12	2.44	24.00
HT20	1	5240	10.70	2.44	24.00
HT40	1	5190	10.95	2.44	24.00
HT40	1	5230	11.23	2.44	24.00
VHT20	1	5180	10.79	2.44	24.00
VHT20	1	5200	11.04	2.44	24.00
VHT20	1	5240	10.45	2.44	24.00
VHT40	1	5190	10.73	2.44	24.00
VHT40	1	5230	11.20	2.44	24.00
VHT80	1	5210	10.82	2.44	24.00
Result			Complied		

Maximum Conducted Output Power (5250-5350MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Output Power (dBm)	Antenna Gain (dBi)	Power Limit
11a	1	5260	10.80	2.44	21.00
11a	1	5300	10.61	2.44	21.00
11a	1	5320	11.74	2.44	21.00
HT20	1	5260	10.78	2.44	21.00
HT20	1	5300	10.49	2.44	21.00
HT20	1	5320	10.50	2.44	21.00
HT40	1	5270	10.69	2.44	21.00
HT40	1	5310	10.59	2.44	21.00
VHT20	1	5260	10.64	2.44	21.00
VHT20	1	5300	10.34	2.44	21.00
VHT20	1	5320	10.39	2.44	21.00
VHT40	1	5270	10.62	2.44	21.00
VHT40	1	5310	10.41	2.44	21.00
VHT80	1	5290	11.43	2.44	21.00
Result			Complied		

Maximum Conducted Output Power (5470-5725MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Output Power (dBm)	Antenna Gain (dBi)	Power Limit
11a	1	5500	11.19	2.44	21.00
11a	1	5580	10.97	2.44	21.00
11a	1	5700	10.93	2.44	21.00
HT20	1	5500	10.28	2.44	21.00
HT20	1	5580	10.89	2.44	21.00
HT20	1	5700	10.89	2.44	21.00
HT40	1	5510	10.43	2.44	21.00
HT40	1	5550	10.53	2.44	21.00
HT40	1	5670	10.91	2.44	21.00
VHT20	1	5500	10.15	2.44	21.00
VHT20	1	5580	10.75	2.44	21.00
VHT20	1	5700	10.86	2.44	21.00
VHT40	1	5510	10.35	2.44	21.00
VHT40	1	5550	10.63	2.44	21.00
VHT40,	1	5670	10.84	2.44	21.00
VHT80	1	5530	11.01	2.44	21.00
Result			Complied		


Maximum Conducted Output Power (5725-5850MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Output Power (dBm)	Antenna Gain (dBi)	Power Limit
11a	1	5745	10.81	2.44	30.00
11a	1	5785	11.07	2.44	30.00
11a	1	5825	10.99	2.44	30.00
HT20	1	5745	10.78	2.44	30.00
HT20	1	5785	10.92	2.44	30.00
HT20	1	5825	10.93	2.44	30.00
HT40	1	5755	11.14	2.44	30.00
HT40	1	5795	11.04	2.44	30.00
VHT20	1	5745	10.64	2.44	30.00
VHT20	1	5785	10.82	2.44	30.00
VHT20	1	5825	10.13	2.44	30.00
VHT40	1	5755	11.08	2.44	30.00
VHT40	1	5795	11.14	2.44	30.00
VHT80	1	5775	10.74	2.44	30.00
Result			Complied		



5150-5250MHz - Worst RF Output Power Plots




5250-5350MHz - Worst RF Output Power Plots

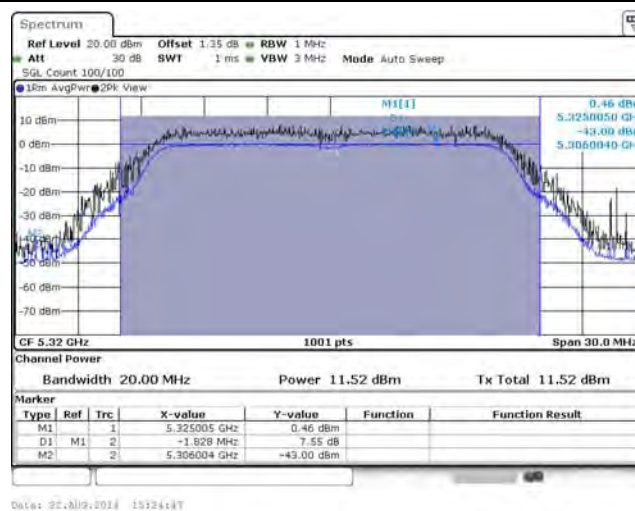


Note 1: RF Output Power Plots w/o Duty Factor



5470-5725MHz - Worst RF Output Power Plots

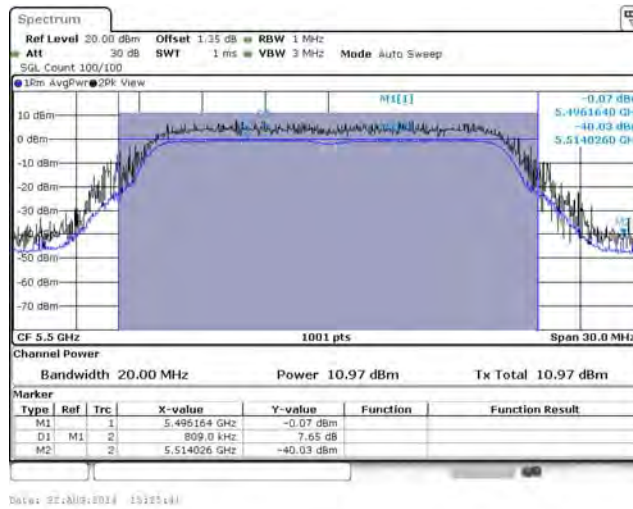

5725-5850MHz - Worst RF Output Power Plots

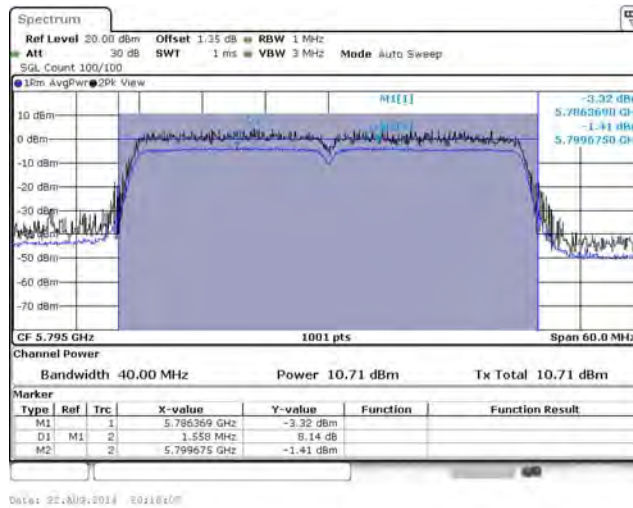

Note 1: RF Output Power Plots w/o Duty Factor

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
☒	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☒	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
☐	Refer as FCC KDB 789033 D02 v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02 v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☐	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☐	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

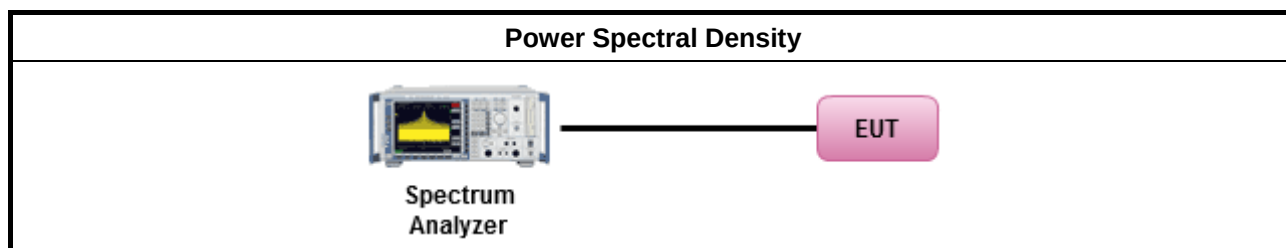

3.4.5 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result (5150-5250MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit	Antenna Gain (dBi)
11a	1	5180	0.14	11.00	2.44
11a	1	5200	0.05	11.00	2.44
11a	1	5240	0.40	11.00	2.44
HT20	1	5180	-0.33	11.00	2.44
HT20	1	5200	0.00	11.00	2.44
HT20	1	5240	-0.80	11.00	2.44
HT40	1	5190	-3.34	11.00	2.44
HT40	1	5230	-3.08	11.00	2.44
VHT20	1	5180	-0.57	11.00	2.44
VHT20	1	5200	-0.27	11.00	2.44
VHT20	1	5240	-0.67	11.00	2.44
VHT40	1	5190	-3.48	11.00	2.44
VHT40	1	5230	-3.21	11.00	2.44
VHT80	1	5210	-6.14	11.00	2.44
Result			Complied		

Peak Power Spectral Density Result (5250-5350MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit	Antenna Gain (dBi)
11a	1	5260	-0.13	11.00	2.44
11a	1	5300	-0.40	11.00	2.44
11a	1	5320	0.68	11.00	2.44
HT20	1	5260	-0.56	11.00	2.44
HT20	1	5300	-0.78	11.00	2.44
HT20	1	5320	-0.89	11.00	2.44
HT40	1	5270	-3.50	11.00	2.44
HT40	1	5310	-3.75	11.00	2.44
VHT20	1	5260	-0.57	11.00	2.44
VHT20	1	5300	-1.05	11.00	2.44
VHT20	1	5320	-0.95	11.00	2.44
VHT40	1	5270	-3.54	11.00	2.44
VHT40	1	5310	-3.75	11.00	2.44
VHT80	1	5290	-5.73	11.00	2.44
Result			Complied		




Peak Power Spectral Density Result (5470-5725MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit	Antenna Gain (dBi)
11a	1	5500	0.15	11.00	2.44
11a	1	5580	-0.21	11.00	2.44
11a	1	5700	-0.09	11.00	2.44
HT20	1	5500	-1.01	11.00	2.44
HT20	1	5580	-0.50	11.00	2.44
HT20	1	5700	-0.31	11.00	2.44
HT40	1	5510	-3.90	11.00	2.44
HT40	1	5550	-3.71	11.00	2.44
HT40	1	5670	-3.31	11.00	2.44
VHT20	1	5500	-1.18	11.00	2.44
VHT20	1	5580	-0.64	11.00	2.44
VHT20	1	5700	-0.48	11.00	2.44
VHT40	1	5510	-3.86	11.00	2.44
VHT40	1	5550	-3.69	11.00	2.44
VHT40	1	5670	-3.30	11.00	2.44
VHT80	1	5530	-5.97	11.00	2.44
Result			Complied		


Peak Power Spectral Density Result (5725-5850MHz band)					
Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit (500kHz)	Antenna Gain (dBi)
11a	1	5745	3.76	30.00	2.44
11a	1	5785	3.47	30.00	2.44
11a	1	5825	3.57	30.00	2.44
HT20	1	5745	3.87	30.00	2.44
HT20	1	5785	3.64	30.00	2.44
HT20	1	5825	4.51	30.00	2.44
HT40	1	5755	2.47	30.00	2.44
HT40	1	5795	1.59	30.00	2.44
VHT20	1	5745	3.11	30.00	2.44
VHT20	1	5785	3.91	30.00	2.44
VHT20	1	5825	2.58	30.00	2.44
VHT40	1	5755	1.47	30.00	2.44
VHT40	1	5795	1.89	30.00	2.44
VHT80	1	5775	-2.33	30.00	2.44
Result			Complied		



5150-5250MHz - Worst Power Spectral Density Plots

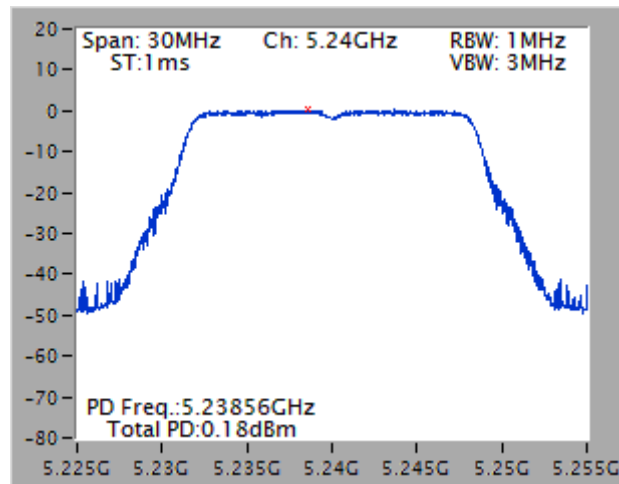


5250-5350MHz - Worst Power Spectral Density Plots

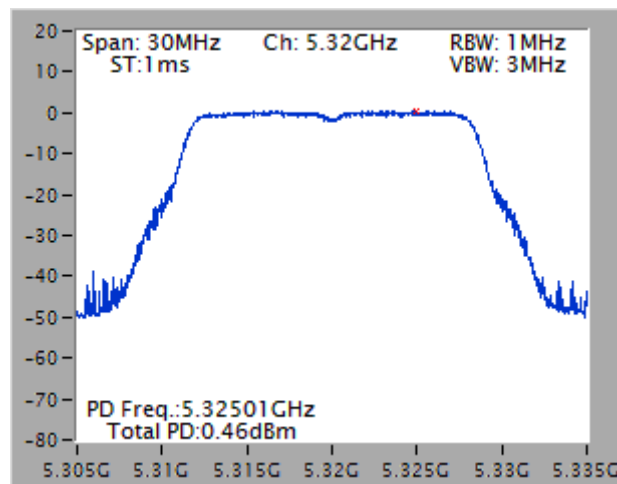


Note 1: Power Density Plots w/o Duty Factor



5470-5725MHz - Worst Power Spectral Density Plots

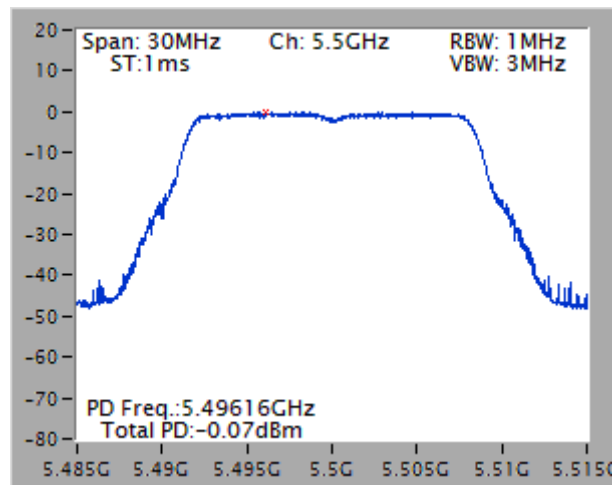



5725-5850MHz - Worst Power Spectral Density Plots

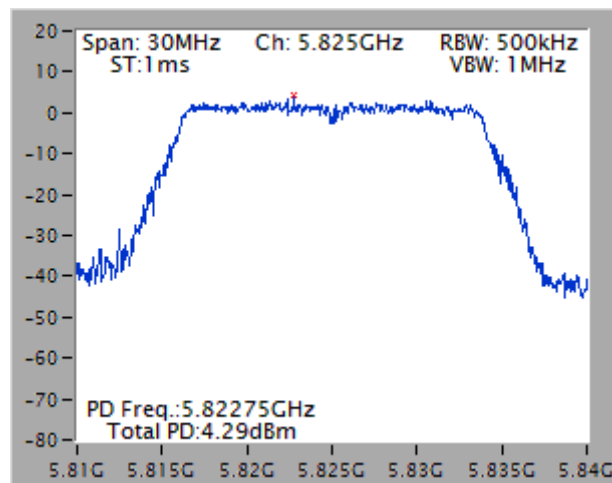


Note 1: Power Density Plots w/o Duty Factor

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

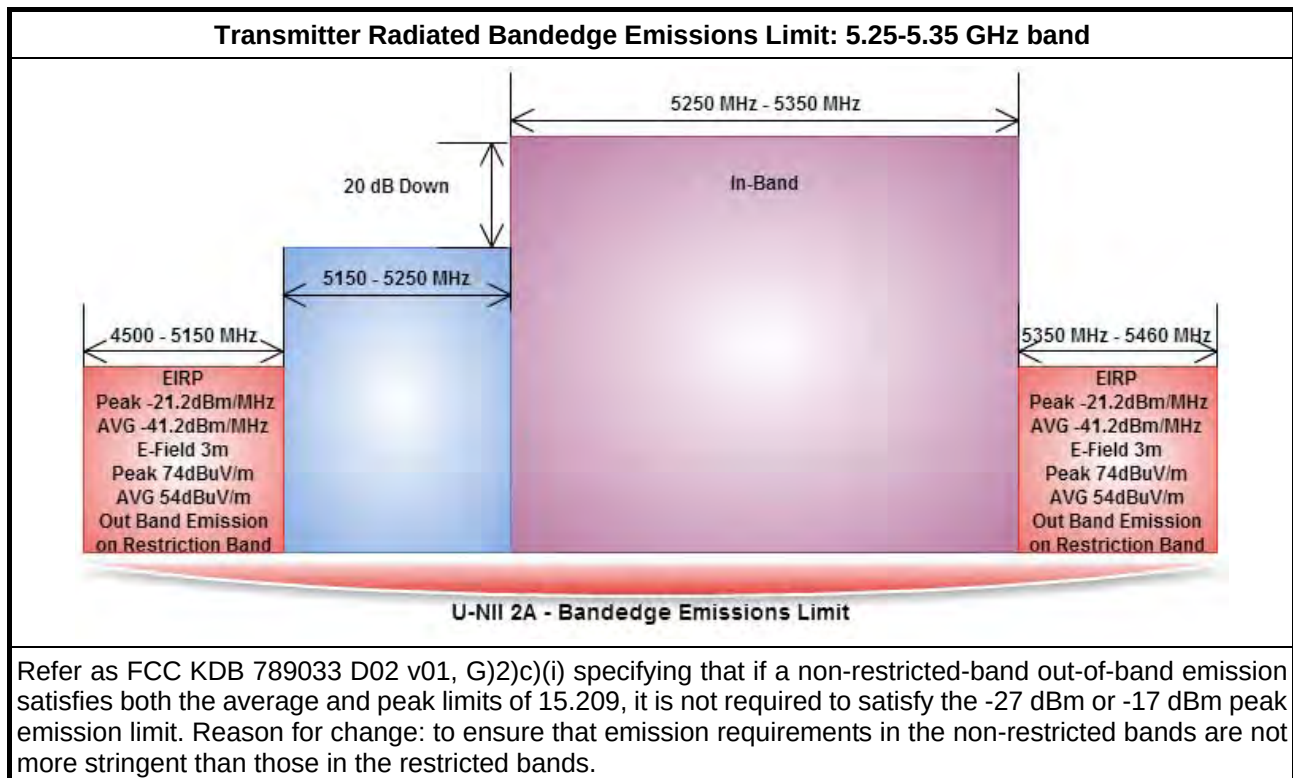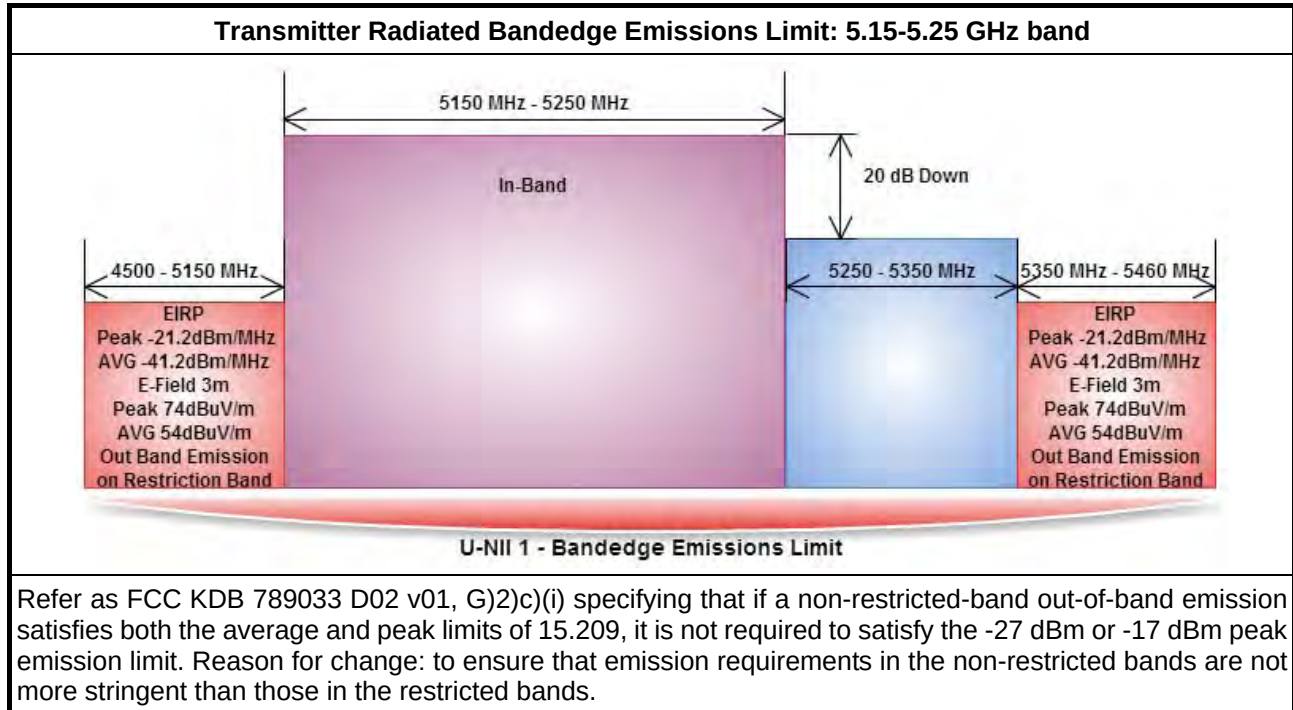


Transmitter Radiated Bandedge Emissions Limit: 5.47-5.725 GHz band

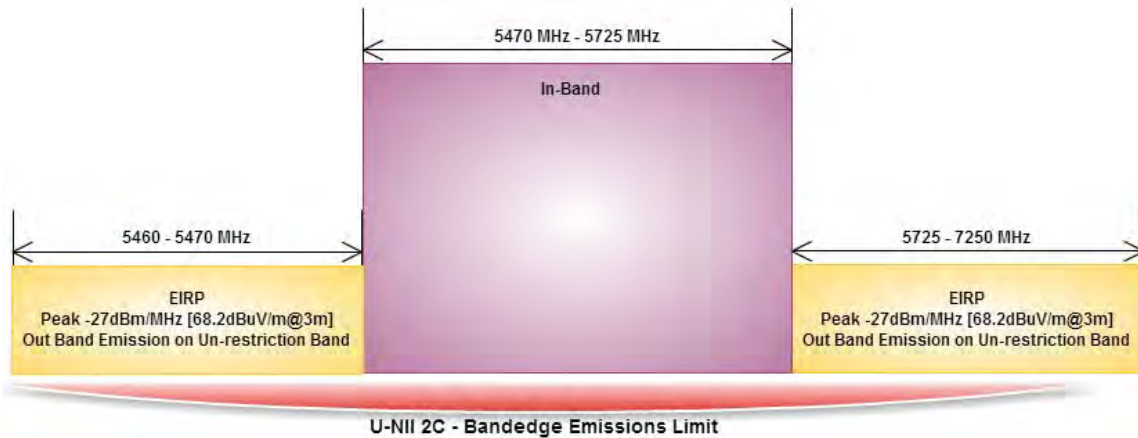

Refer as FCC KDB 789033 D02 v01, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.

Transmitter Radiated Bandedge Emissions Limit for 5.8GHz band: 5.725-5.85 GHz band

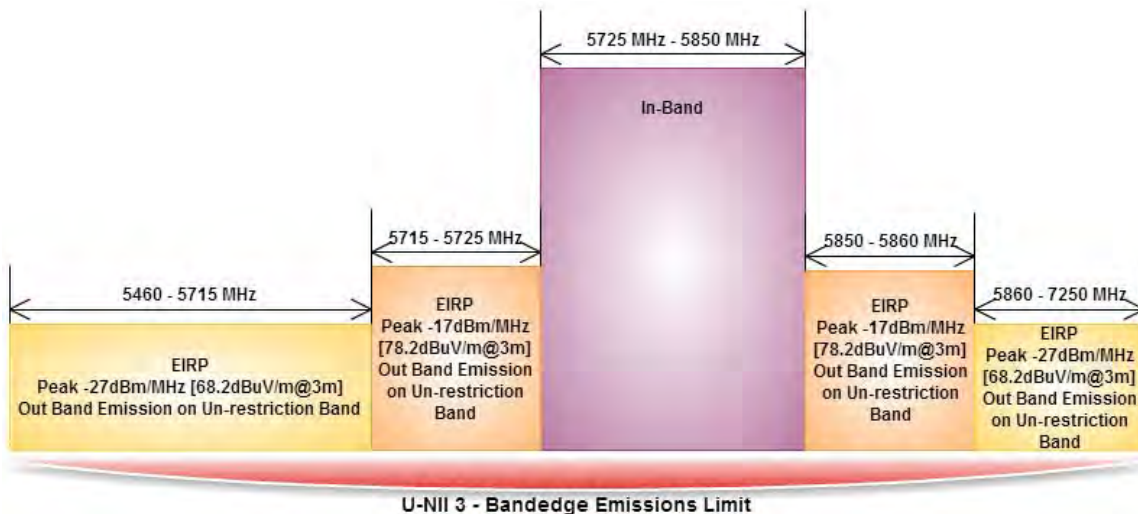

Refer as FCC KDB 789033 D02 v01, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☐	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band). ☐ Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
☐	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
☐	☐ Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band). ☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033 D02 v01, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, clause H)1) for unwanted emissions into restricted bands.
☐	☐ Refer as FCC KDB 789033 D02 v01, H)6) Method AD (Trace Averaging). ☐ Refer as FCC KDB 789033 D02 v01, H)6) Method VB (Reduced VBW). ☒ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time. ☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. ☒ Refer as FCC KDB 789033 D02 v01, clause H)5) measurement procedure peak limit. ☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 789033 D02 v01, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.6. Test distance is 3m.
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.

3.5.4 Test Setup

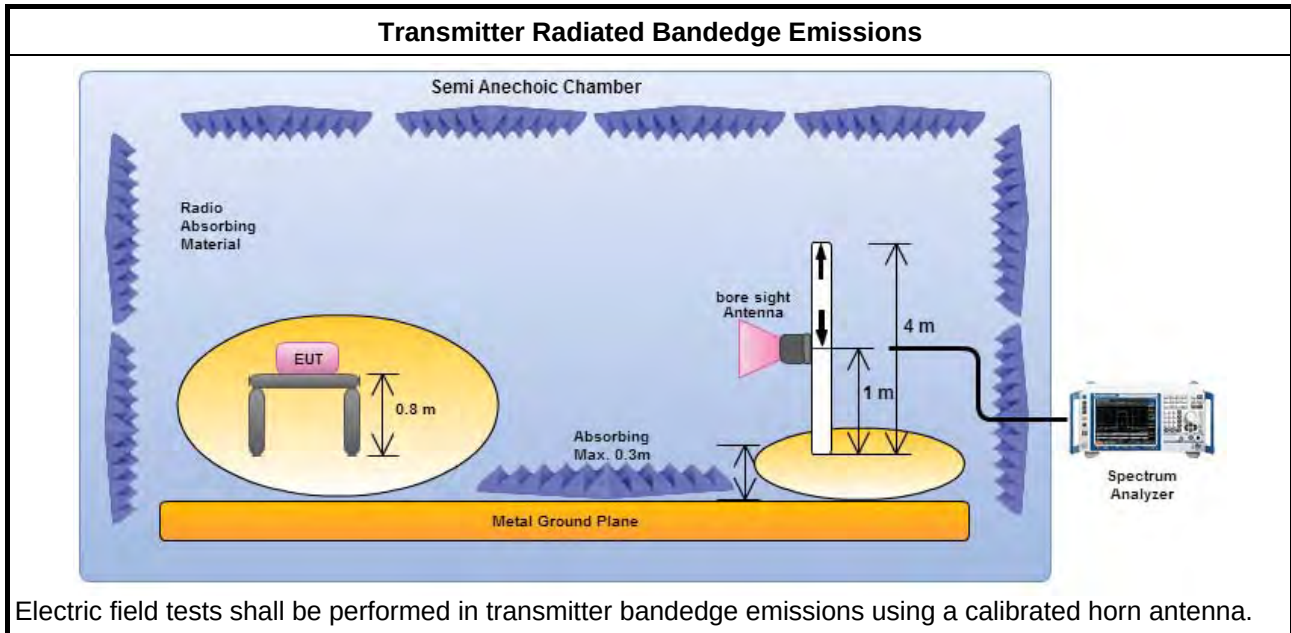

3.5.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5149.40	58.50	74	5138.40	43.47	54	V
11a	1	5240	3	5375.40	57.42	74	5376.60	43.97	54	V
HT20	1	5180	3	5149.80	59.01	74	5139.40	43.51	54	V
HT20	1	5240	3	5375.40	57.93	74	5388.00	44.20	54	V
HT40	1	5190	3	5149.28	57.34	74	5143.56	43.41	54	V
HT40	1	5230	3	5378.40	58.08	74	5390.40	44.07	54	V
VHT20	1	5180	3	5148.80	61.23	74	5137.80	43.50	54	V
VHT20	1	5240	3	5363.40	57.86	74	5394.00	44.10	54	V
VHT40	1	5190	3	5137.62	57.93	74	5143.78	43.64	54	V
VHT40	1	5230	3	5381.40	57.43	74	5387.40	44.23	54	V
VHT80	1	5210	3	5149.20	56.74	74	5143.80	43.34	54	V
VHT80	1	5210	3	5392.20	57.42	74	5394.00	43.74	54	V
Note 1: Measurement worst emissions of receive antenna polarization.										

U-NII 5250-5350MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5260	3	5116.20	57.34	74	5127.60	43.43	54	V
11a	1	5320	3	5364.74	57.72	74	5373.84	43.97	54	V
HT20	1	5260	3	5112.00	56.89	74	5132.40	43.43	54	V
HT20	1	5320	3	5354.66	58.17	74	5373.98	43.97	54	V
HT40	1	5270	3	5133.60	57.07	74	5101.20	43.42	54	V
HT40	1	5310	3	5350.30	58.60	74	5374.06	43.95	54	V
VHT20	1	5260	3	5121.00	57.58	74	5125.80	43.40	54	V
VHT20	1	5320	3	5378.74	57.55	74	5376.36	43.88	54	V
VHT40	1	5270	3	5128.80	57.83	74	5135.40	43.50	54	V
VHT40	1	5310	3	5351.92	62.38	74	5350.12	44.63	54	V
VHT80	1	5290	3	5105.40	57.20	74	5143.20	43.34	54	V
VHT80	1	5290	3	5360.40	62.12	74	5350.80	45.89	54	V
Note 1: Measurement worst emissions of receive antenna polarization.										

U-NII 5470-5725MHz Transmitter Radiated Bandedge (with Antenna)

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5500	3	5431.92	57.92	74.0	V
11a	1	5700	3	5725.76	58.19	68.2	V
HT20	1	5500	3	5432.24	58.40	74.0	V
HT20	1	5700	3	5725.16	64.90	68.2	V
HT40	1	5510	3	5449.00	58.47	74.0	V
HT40	1	5670	3	5734.20	58.51	68.2	V
VHT20	1	5500	3	5448.88	58.23	74.0	V
VHT20	1	5700	3	5725.52	64.78	68.2	V
VHT40	1	5510	3	5459.80	61.12	74.0	V
VHT40	1	5670	3	5727.60	57.70	68.2	V
VHT80	1	5530	3	5460.08	66.64	74.0	V
VHT80	1	5530	3	5730.16	57.42	68.2	V

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna)

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5745	3	5723.92	62.40	78.2	V
11a	1	5825	3	5853.01	60.18	78.2	V
HT20	1	5745	3	5724.97	46.85	78.2	V
HT20	1	5825	3	5850.07	64.81	78.2	V
HT40	1	5755	3	5714.61	65.14	78.2	V
HT40	1	5795	3	5850.10	57.85	78.2	V
VHT20	1	5745	3	5724.97	71.33	78.2	V
VHT20	1	5825	3	5852.38	62.80	78.2	V
VHT40	1	5755	3	5724.88	65.49	78.2	V
VHT40	1	5795	3	5851.90	58.31	78.2	V
VHT80	1	5775	3	5719.66	66.35	78.2	V
VHT80	1	5775	3	5851.42	60.37	78.2	V

Note 1: Measurement worst emissions of receive antenna polarization.

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033 D02 v01, clause G)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033 D02 v01, clause G)1) for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 789033 D02 v01, G)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033 D02 v01, G)6) Method VB (Reduced VBW).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033 D02 v01, clause G)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions Below 1GHz

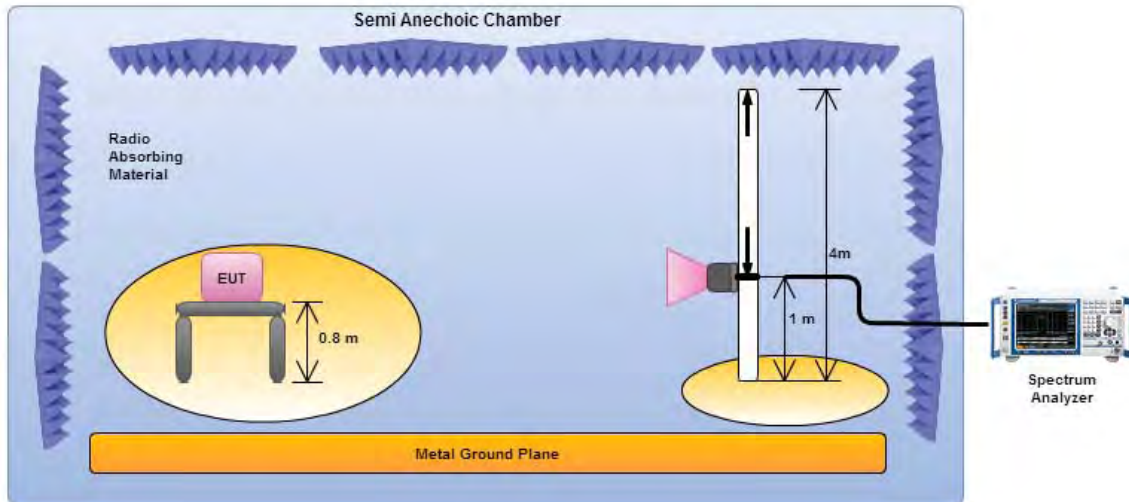

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions Above 1GHz

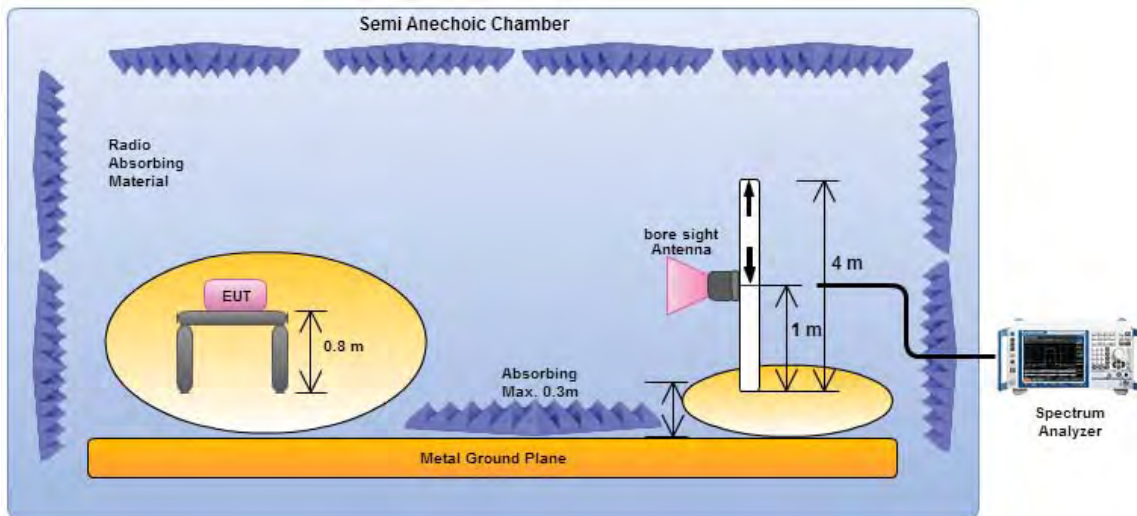


The frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions-with Antenna (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

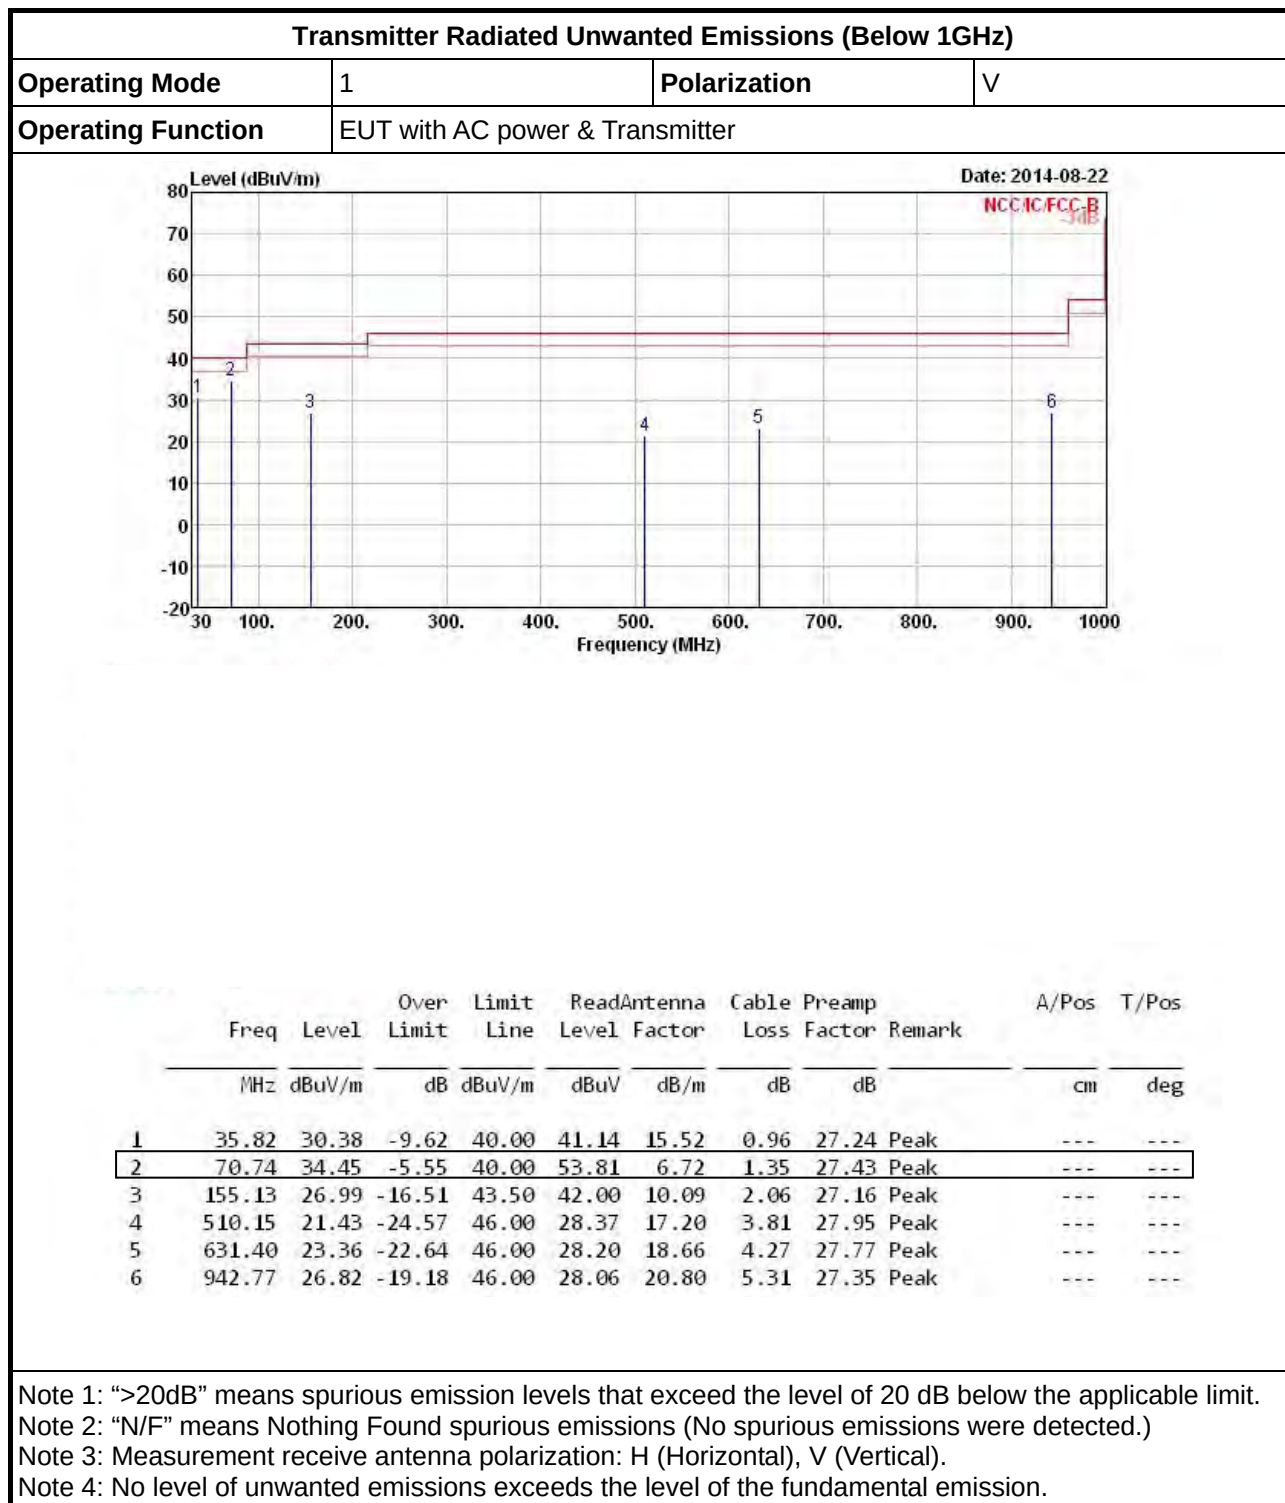

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	EUT with AC power & Transmitter		

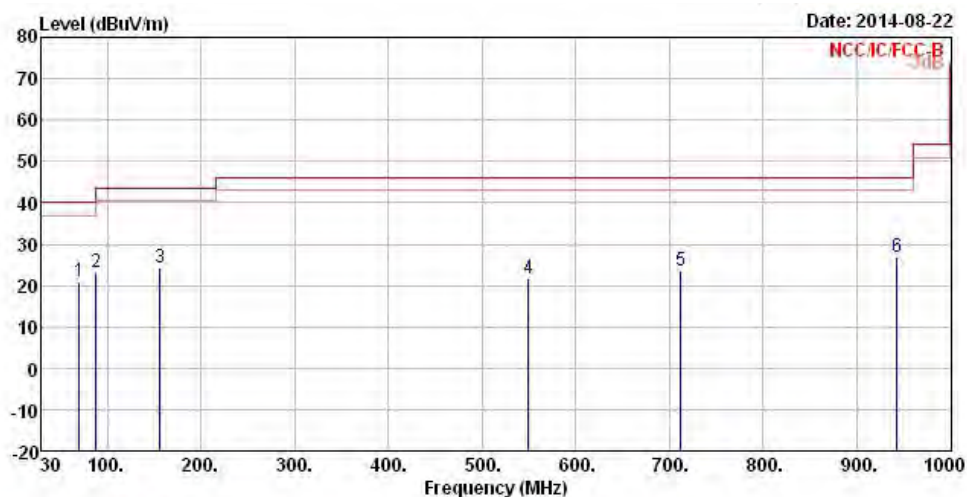


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	69.77	20.90	-19.10	40.00	40.26	6.73	1.34	27.43	Peak	---	---
2	88.20	23.19	-20.31	43.50	40.31	8.58	1.53	27.23	Peak	---	---
3	156.10	24.12	-19.38	43.50	39.14	10.08	2.06	27.16	Peak	---	---
4	549.92	21.87	-24.13	46.00	27.24	18.57	3.92	27.86	Peak	---	---
5	711.91	23.62	-22.38	46.00	27.81	19.00	4.58	27.77	Peak	---	---
6	942.77	26.69	-19.31	46.00	27.93	20.80	5.31	27.35	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

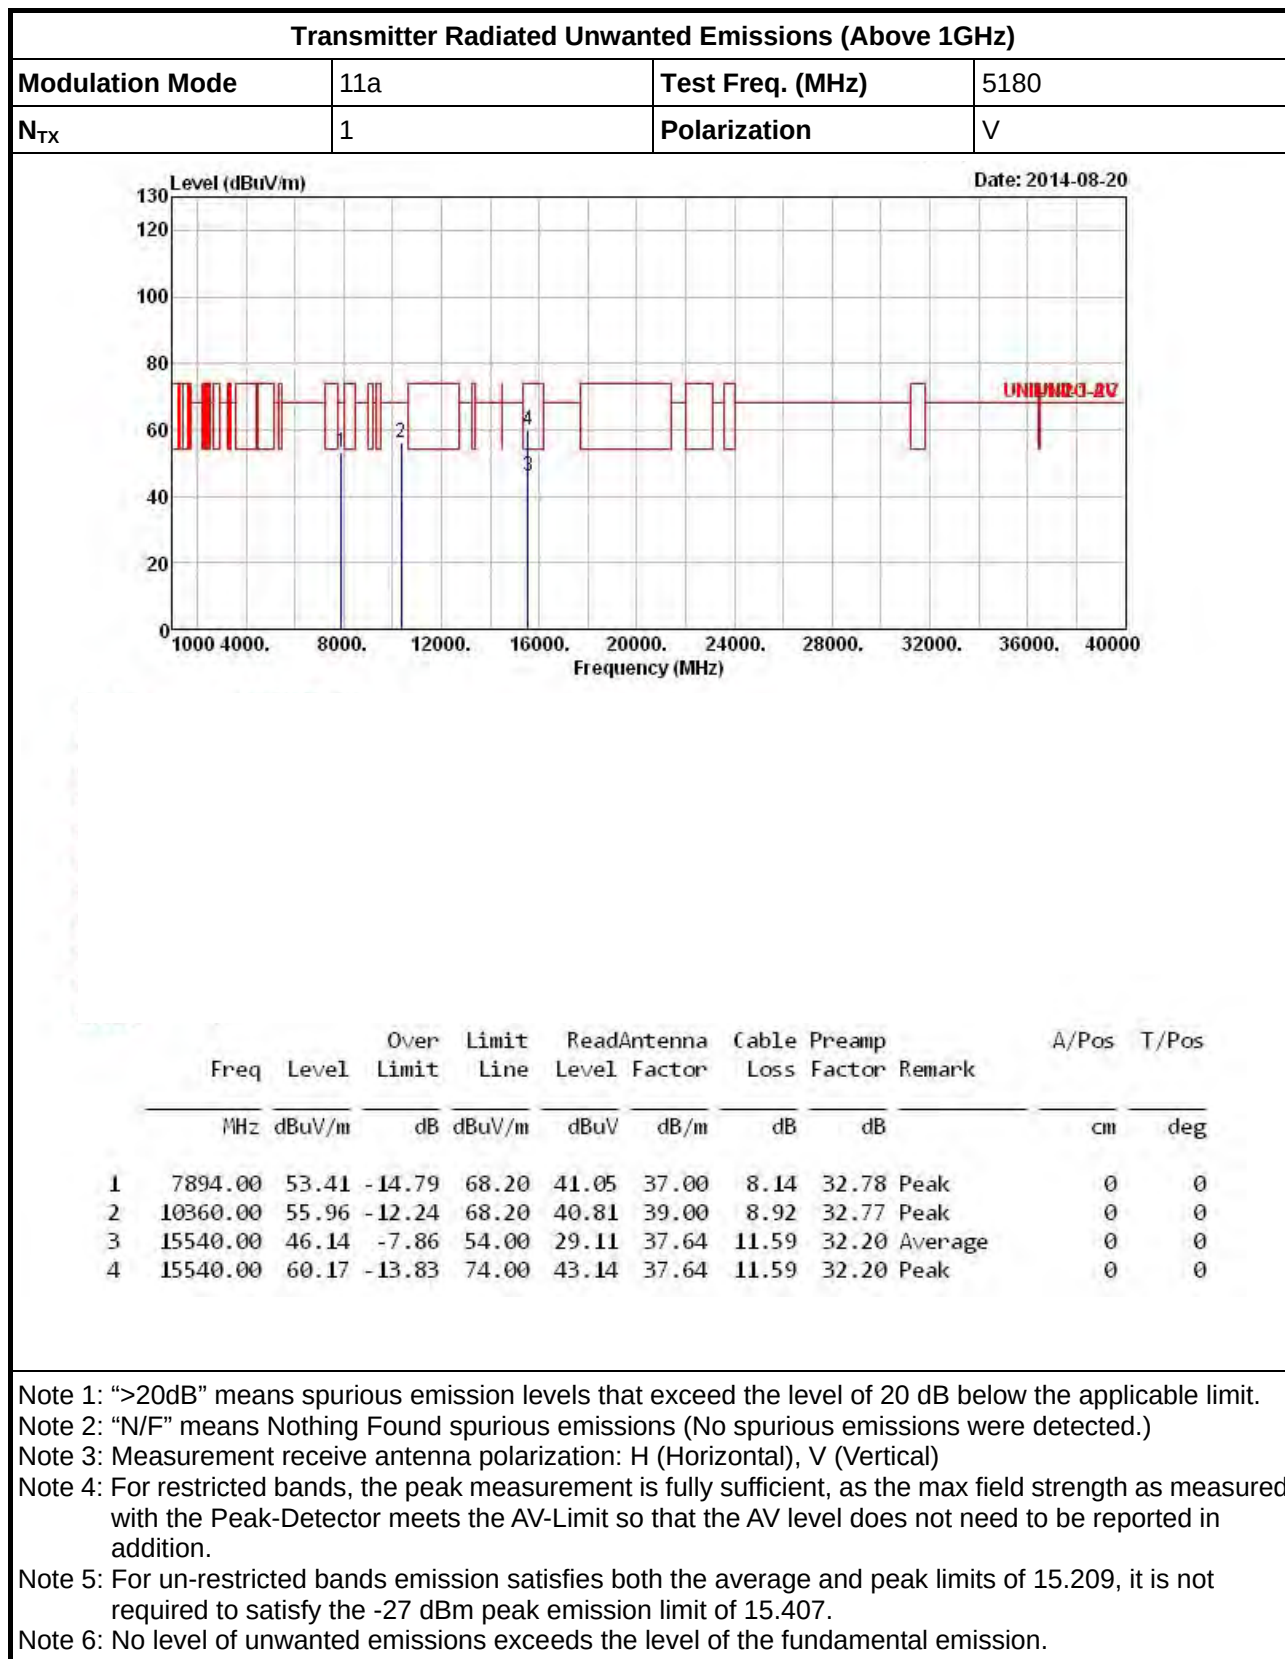3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

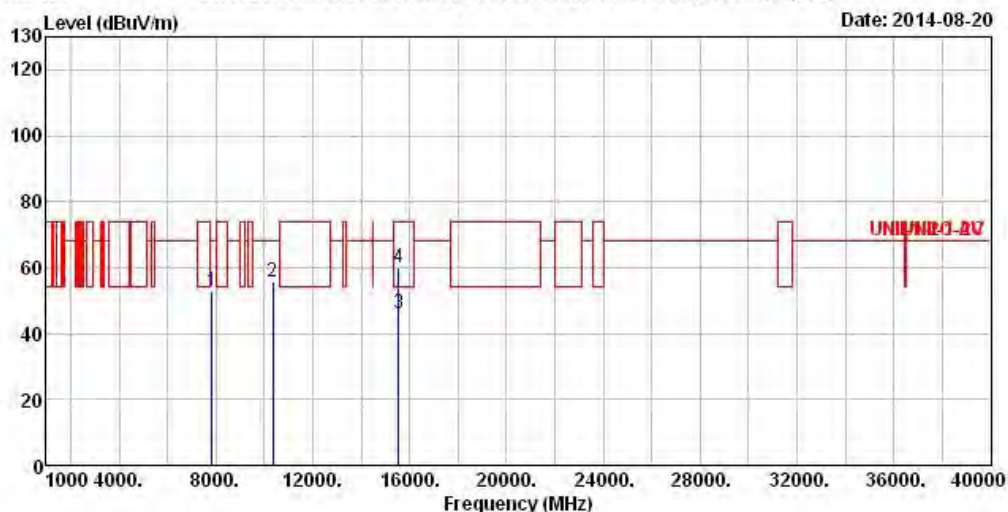

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7848.00	52.60	-15.60	68.20	40.36	36.95	8.07	32.78	Peak	0	0
2	10360.00	55.81	-12.39	68.20	40.66	39.00	8.92	32.77	Peak	0	0
3	15540.00	46.06	-7.94	54.00	29.03	37.64	11.59	32.20	Average	0	0
4	15540.00	59.95	-14.05	74.00	42.92	37.64	11.59	32.20	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

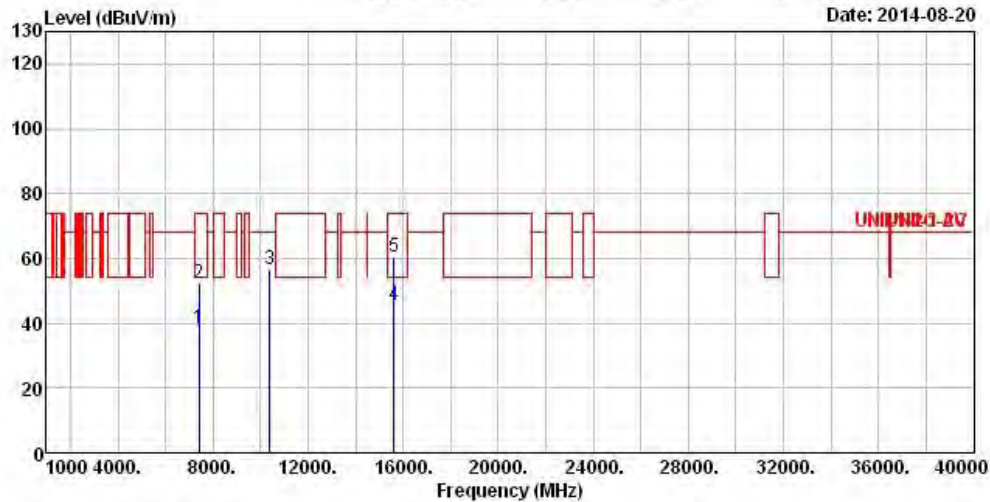

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7426.00	38.35	-15.65	54.00	27.26	36.42	7.37	32.70	Average	0	0
2	7426.00	52.06	-21.94	74.00	40.97	36.42	7.37	32.70	Peak	0	0
3	10400.00	56.42	-11.78	68.20	41.21	39.00	8.94	32.73	Peak	0	0
4	15600.00	45.52	-8.48	54.00	28.62	37.53	11.59	32.22	Average	0	0
5	15600.00	60.47	-13.53	74.00	43.57	37.53	11.59	32.22	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

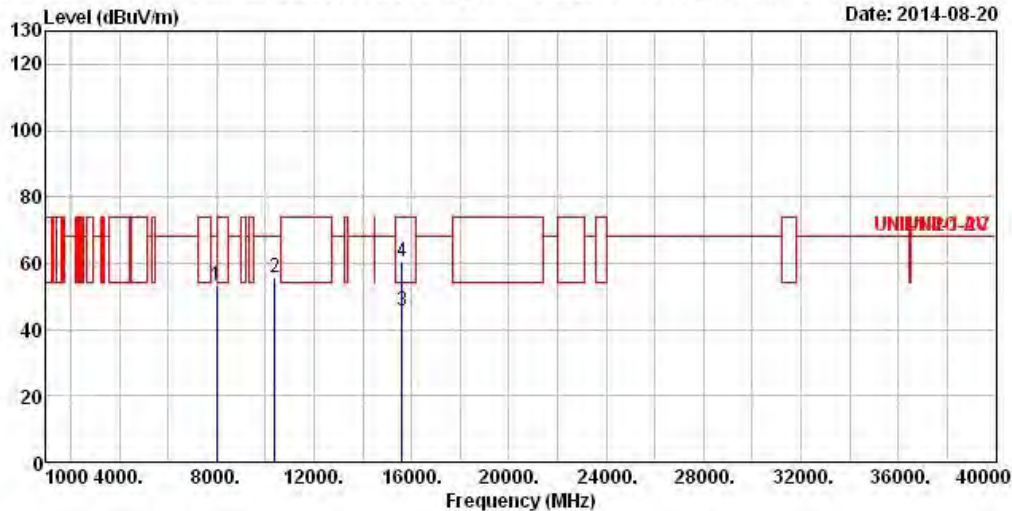

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8014.00	53.22	-14.98	68.20	40.63	37.13	8.26	32.80	Peak	0	0
2	10400.00	55.57	-12.63	68.20	40.36	39.00	8.94	32.73	Peak	0	0
3	15600.00	45.68	-8.32	54.00	28.78	37.53	11.59	32.22	Average	0	0
4	15600.00	60.52	-13.48	74.00	43.62	37.53	11.59	32.22	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

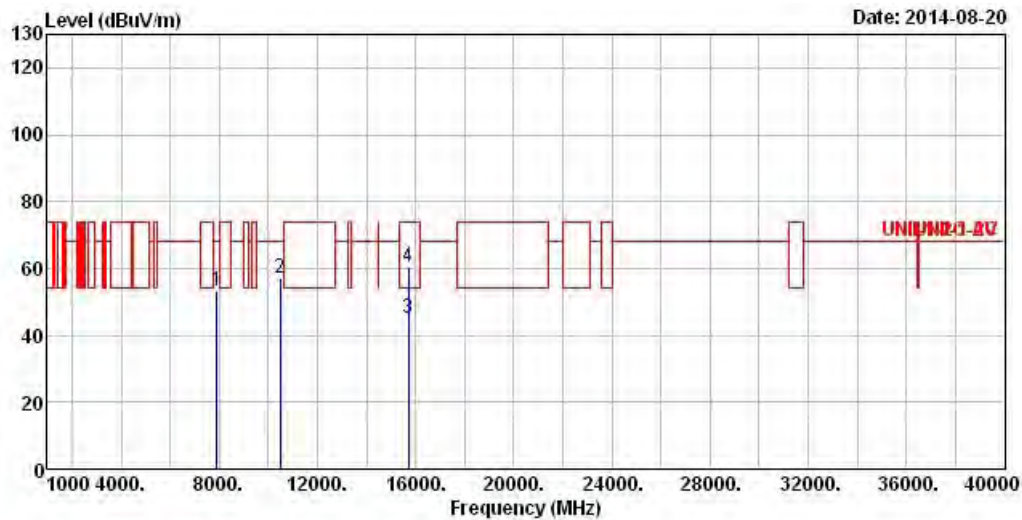

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7891.00	53.23	-14.97	68.20	40.89	36.98	8.14	32.78	Peak	0	0
2	10480.00	56.96	-11.24	68.20	41.64	39.00	8.99	32.67	Peak	0	0
3	15720.00	45.19	-8.81	54.00	28.51	37.34	11.59	32.25	Average	0	0
4	15720.00	60.59	-13.41	74.00	43.91	37.34	11.59	32.25	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

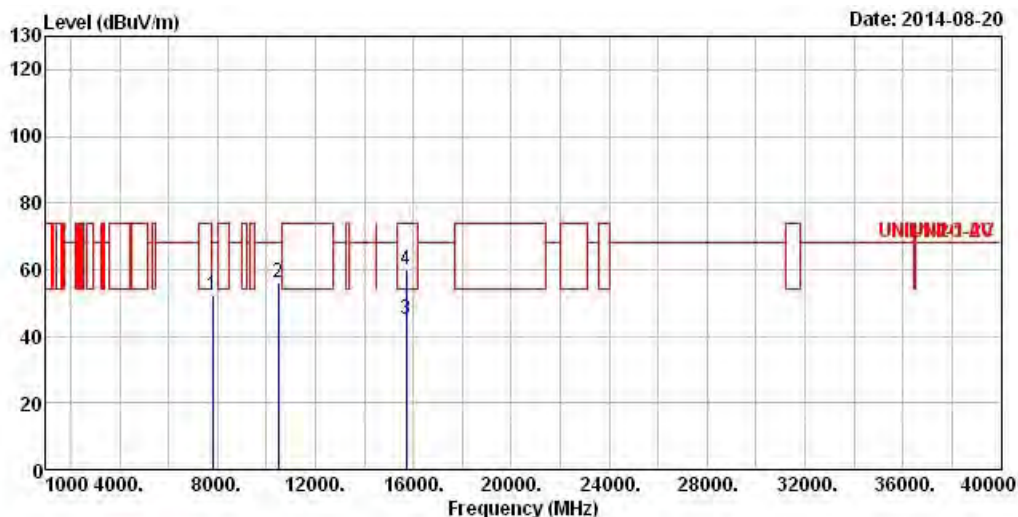

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	/MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7812.00	52.29	-15.91	68.20	40.14	36.92	8.00	32.77	Peak	0
2	10480.00	56.33	-11.87	68.20	41.01	39.00	8.99	32.67	Peak	0
3	15720.00	45.22	-8.78	54.00	28.54	37.34	11.59	32.25	Average	0
4	15720.00	59.79	-14.21	74.00	43.11	37.34	11.59	32.25	Peak	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

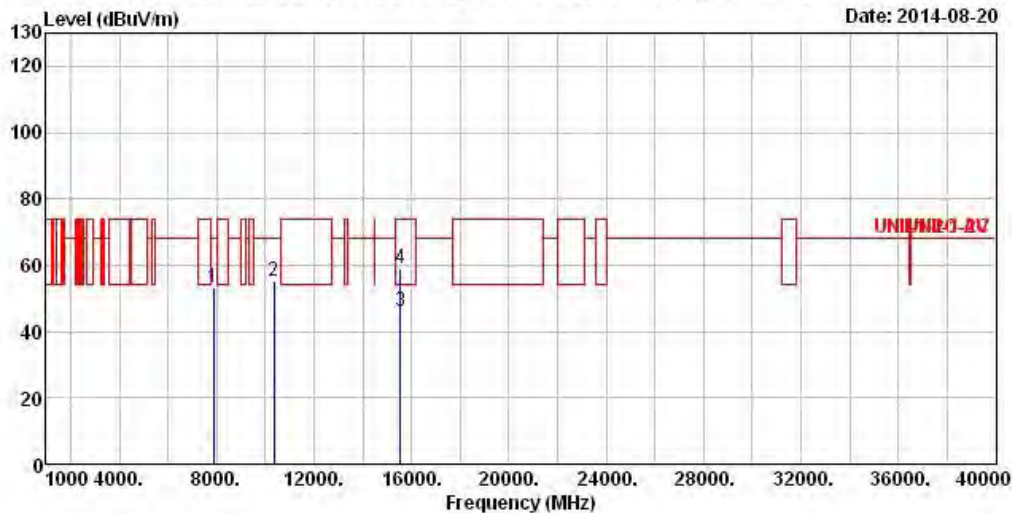

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7868.00	53.18	-15.02	68.20	40.92	36.97	8.07	32.78	Peak	---	---
2	10360.00	55.34	-12.86	68.20	40.19	39.00	8.92	32.77	Peak	---	---
3	15540.00	46.03	-7.97	54.00	29.00	37.64	11.59	32.20	Average	---	---
4	15540.00	58.78	-15.22	74.00	41.75	37.64	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

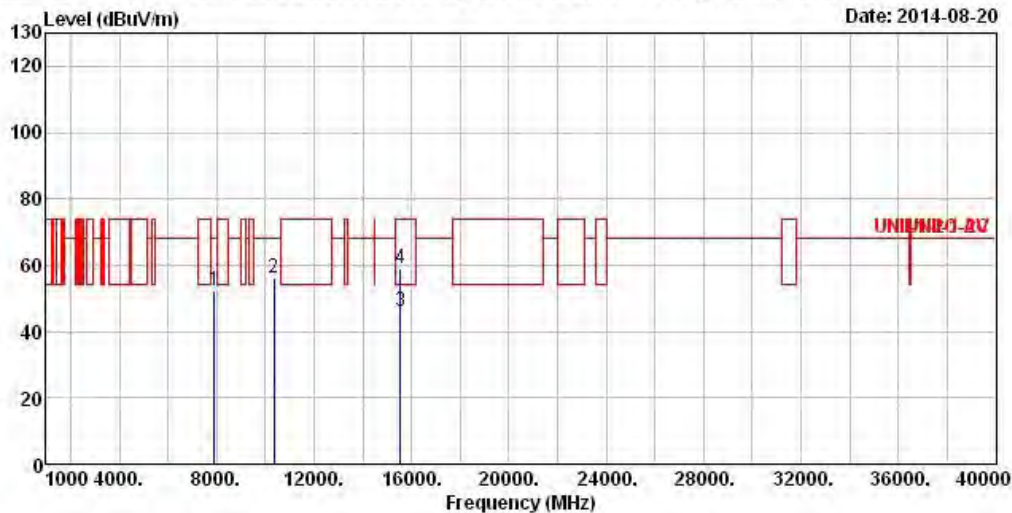

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7896.00	52.46	-15.74	68.20	40.10	37.00	8.14	32.78	Peak	---	---
2	10360.00	55.97	-12.23	68.20	40.82	39.00	8.92	32.77	Peak	---	---
3	15540.00	45.88	-8.12	54.00	28.85	37.64	11.59	32.20	Average	0	0
4	15540.00	59.13	-14.87	74.00	42.10	37.64	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

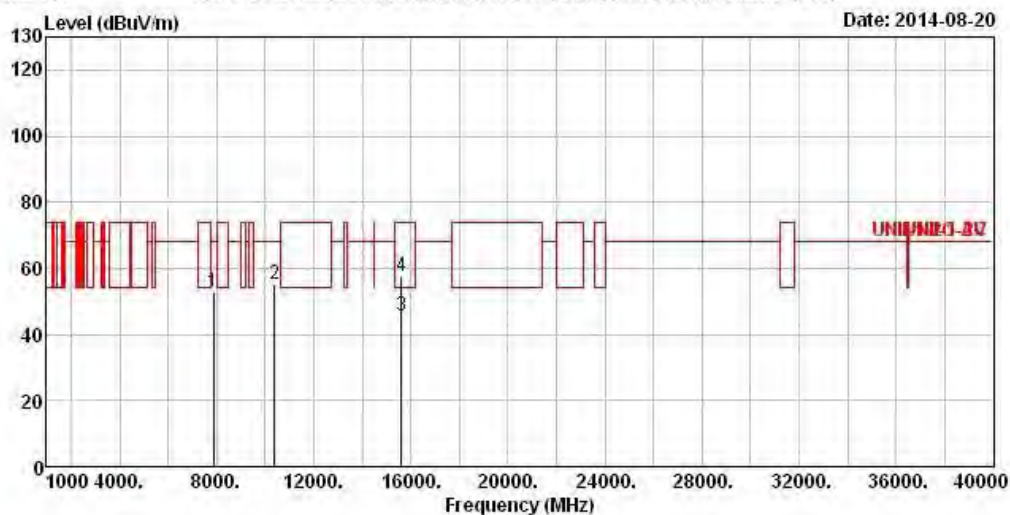

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7876.00	52.99	-15.21	68.20	40.73	36.97	8.07	32.78	Peak	---	---
2	10400.00	55.36	-12.84	68.20	40.15	39.00	8.94	32.73	Peak	---	---
3	15600.00	45.65	-8.35	54.00	28.75	37.53	11.59	32.22	Average	---	---
4	15600.00	57.71	-16.29	74.00	40.81	37.53	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

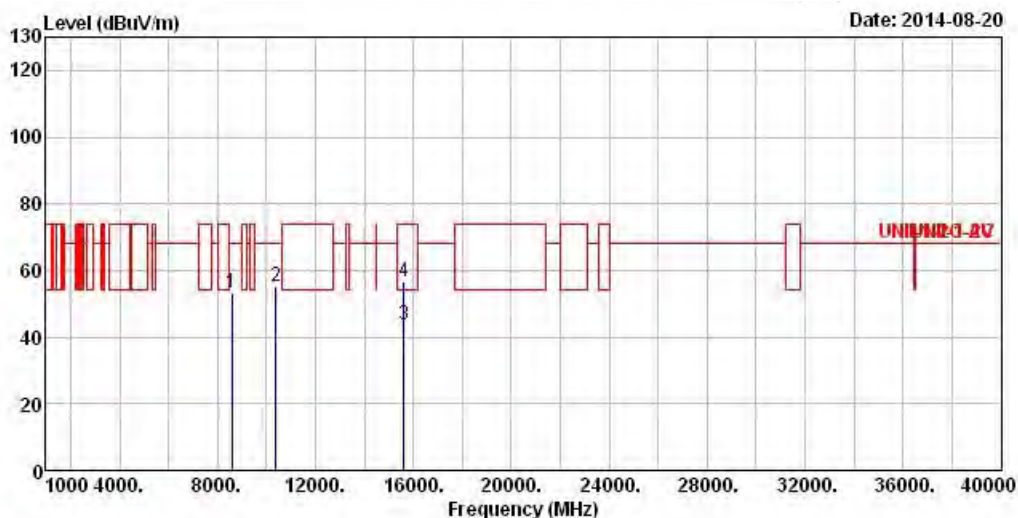

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8575.00	53.46	-14.74	68.20	40.20	38.13	7.97	32.84 Peak	---	---
2	10400.00	54.93	-13.27	68.20	39.72	39.00	8.94	32.73 Peak	---	---
3	15600.00	43.42	-10.58	54.00	26.52	37.53	11.59	32.22 Average	---	---
4	15600.00	56.80	-17.20	74.00	39.90	37.53	11.59	32.22 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

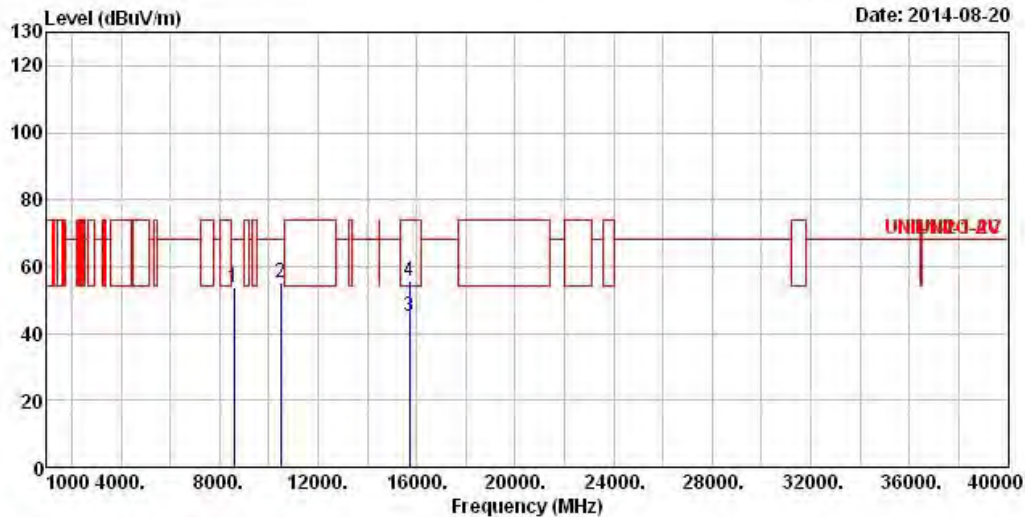

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8596.00	53.94	-14.26	68.20	40.69	38.14	7.95	32.84	Peak	---	---
2	10480.00	55.29	-12.91	68.20	39.97	39.00	8.99	32.67	Peak	---	---
3	15720.00	45.15	-8.85	54.00	28.47	37.34	11.59	32.25	Average	---	---
4	15720.00	55.84	-18.16	74.00	39.16	37.34	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

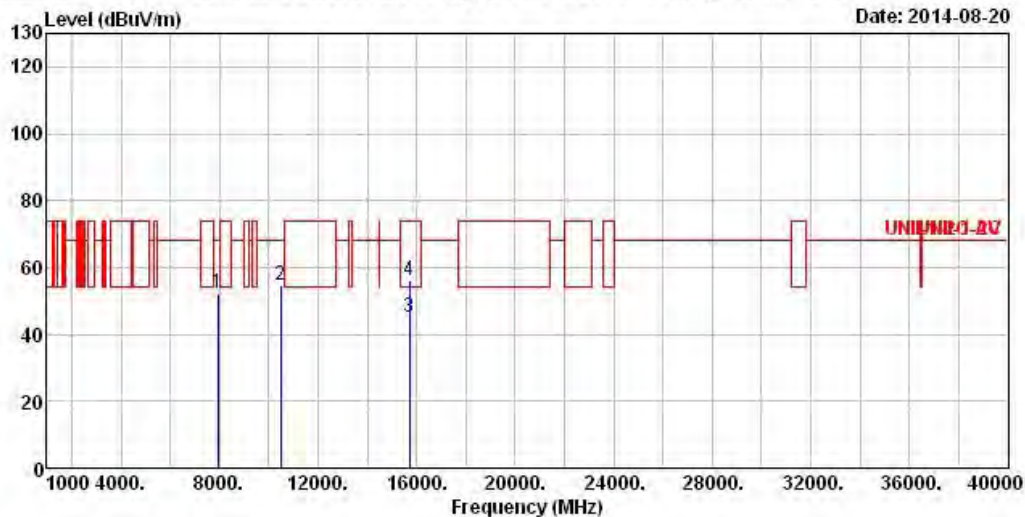

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7945.00	52.38	-15.82	68.20	39.91	37.05	8.21	32.79	Peak	---	---
2	10480.00	54.58	-13.62	68.20	39.26	39.00	8.99	32.67	Peak	---	---
3	15720.00	45.19	-8.81	54.00	28.51	37.34	11.59	32.25	Average	---	---
4	15720.00	56.11	-17.89	74.00	39.43	37.34	11.59	32.25	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	1	Polarization	V

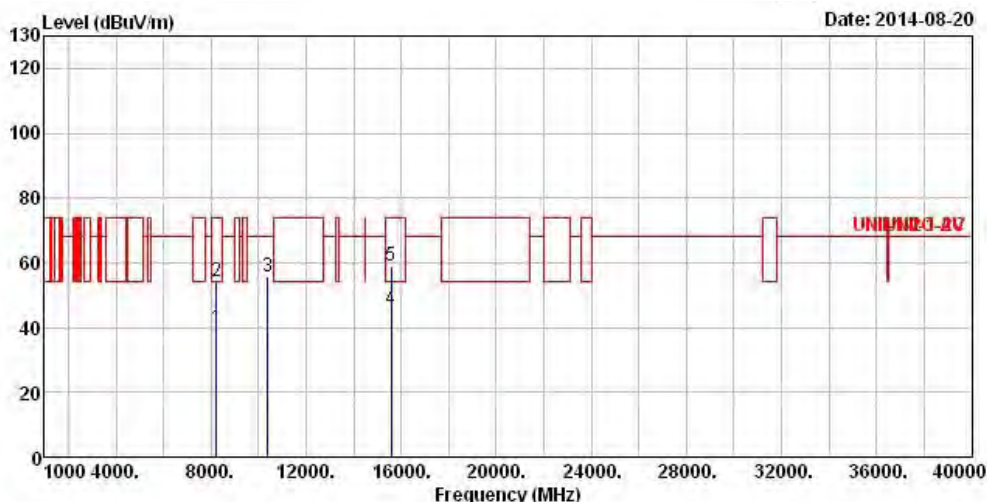

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8234.00	39.69	-14.31	54.00	26.75	37.58	8.16	32.80	Average	---
2	8234.00	53.98	-20.02	74.00	41.04	37.58	8.16	32.80	Peak	---
3	10380.00	55.61	-12.59	68.20	40.42	39.00	8.94	32.75	Peak	---
4	15570.00	45.70	-8.30	54.00	28.72	37.59	11.59	32.20	Average	---
5	15570.00	59.02	-14.98	74.00	42.04	37.59	11.59	32.20	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	1	Polarization	H

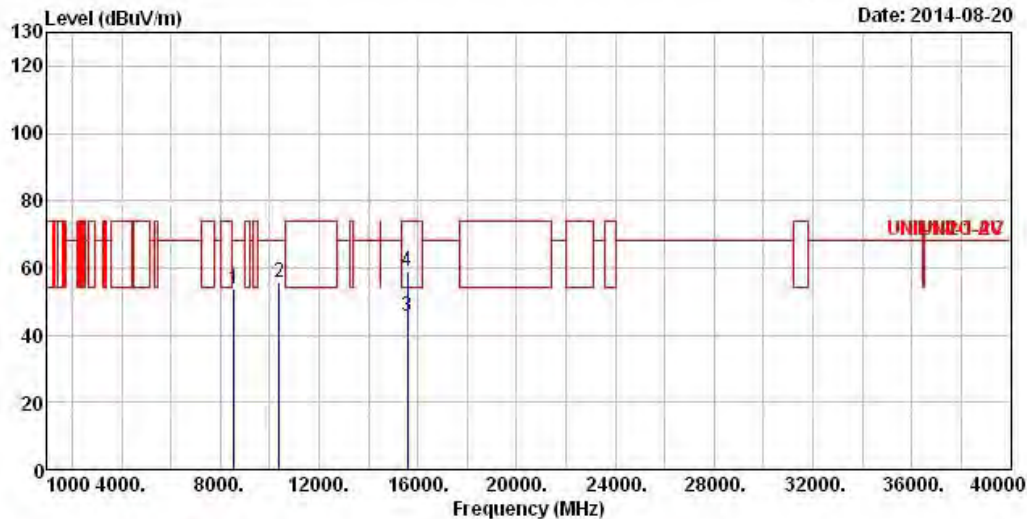

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8554.00	53.60	-14.60	68.20	40.34	38.12	7.97	32.83	Peak	---	---
2	10380.00	55.49	-12.71	68.20	40.30	39.00	8.94	32.75	Peak	---	---
3	15570.00	45.76	-8.24	54.00	28.78	37.59	11.59	32.20	Average	---	---
4	15570.00	59.01	-14.99	74.00	42.03	37.59	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	V

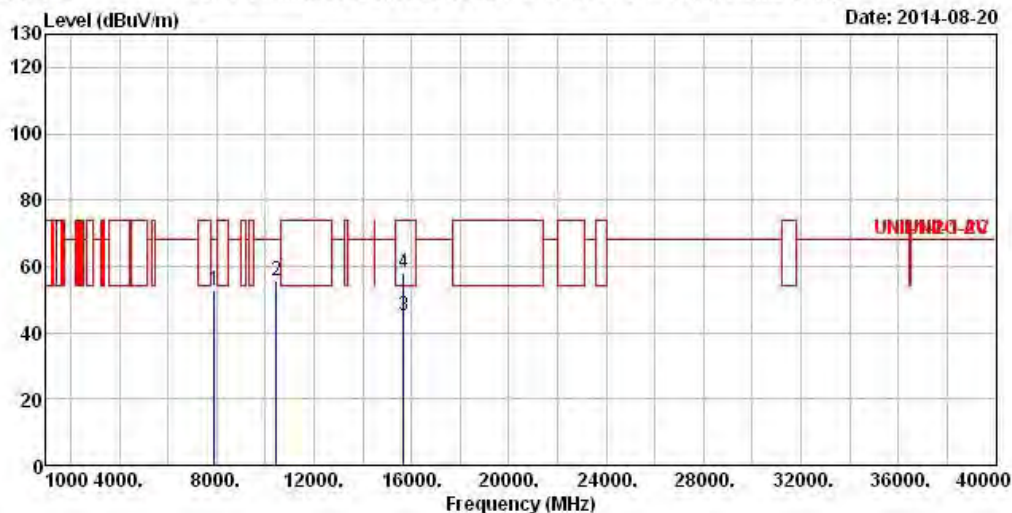

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7920.00	52.55	-15.65	68.20	40.17	37.02	8.14	32.78	Peak	---	---
2	10460.00	55.59	-12.61	68.20	40.29	39.00	8.99	32.69	Peak	---	---
3	15690.00	45.07	-8.93	54.00	28.32	37.40	11.59	32.24	Average	---	---
4	15690.00	58.15	-15.85	74.00	41.40	37.40	11.59	32.24	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	H

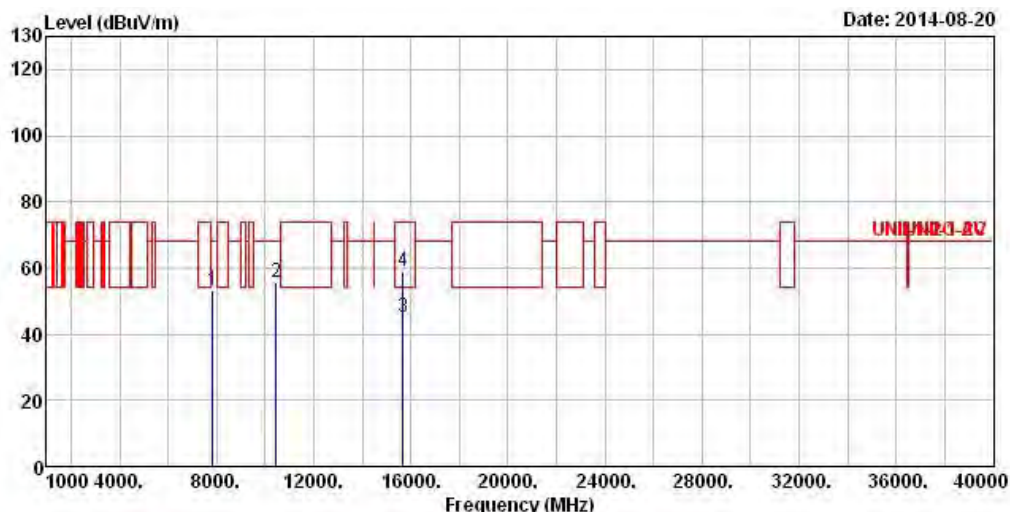

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7844.00	53.17	-15.03	68.20	40.99	36.95	8.00	32.77	Peak	---
2	10460.00	55.41	-12.79	68.20	40.11	39.00	8.99	32.69	Peak	---
3	15690.00	45.15	-8.85	54.00	28.40	37.40	11.59	32.24	Average	---
4	15690.00	58.84	-15.16	74.00	42.09	37.40	11.59	32.24	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	V

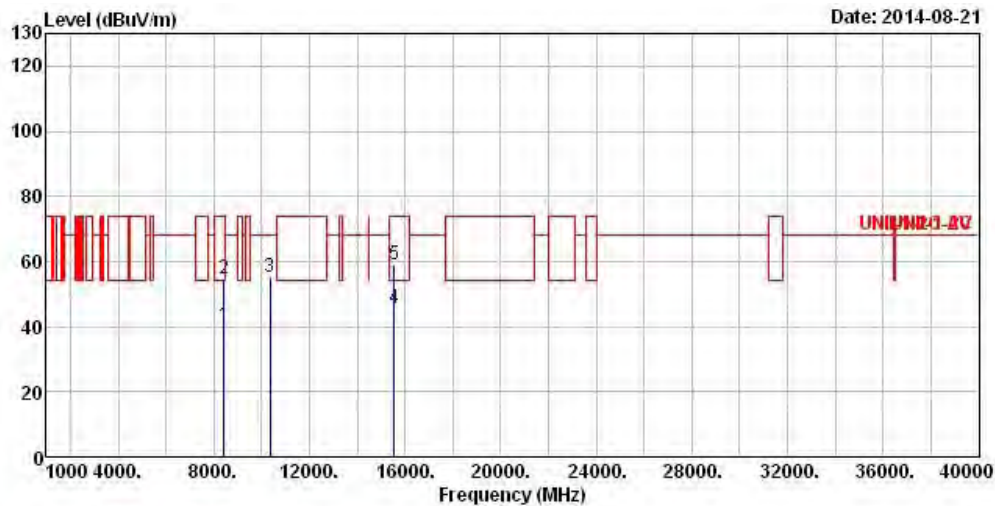

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8440.00	40.09	-13.91	54.00	26.87	38.00	8.03	32.81	Average	---	---
2	8440.00	54.58	-19.42	74.00	41.36	38.00	8.03	32.81	Peak	---	---
3	10360.00	55.26	-12.94	68.20	40.11	39.00	8.92	32.77	Peak	---	---
4	15540.00	45.77	-8.23	54.00	28.74	37.64	11.59	32.20	Average	---	---
5	15540.00	58.84	-15.16	74.00	41.81	37.64	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

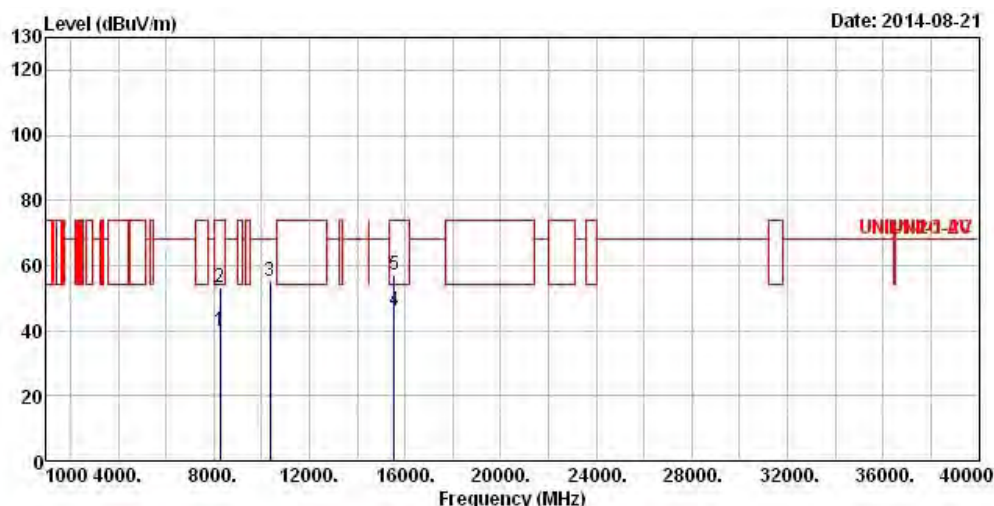

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8268.00	39.72	-14.28	54.00	26.75	37.65	8.13	32.81	Average	---	---
2	8268.00	53.29	-20.71	74.00	40.32	37.65	8.13	32.81	Peak	---	---
3	10360.00	55.34	-12.86	68.20	40.19	39.00	8.92	32.77	Peak	---	---
4	15540.00	45.87	-8.13	54.00	28.84	37.64	11.59	32.20	Average	---	---
5	15540.00	57.32	-16.68	74.00	40.29	37.64	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

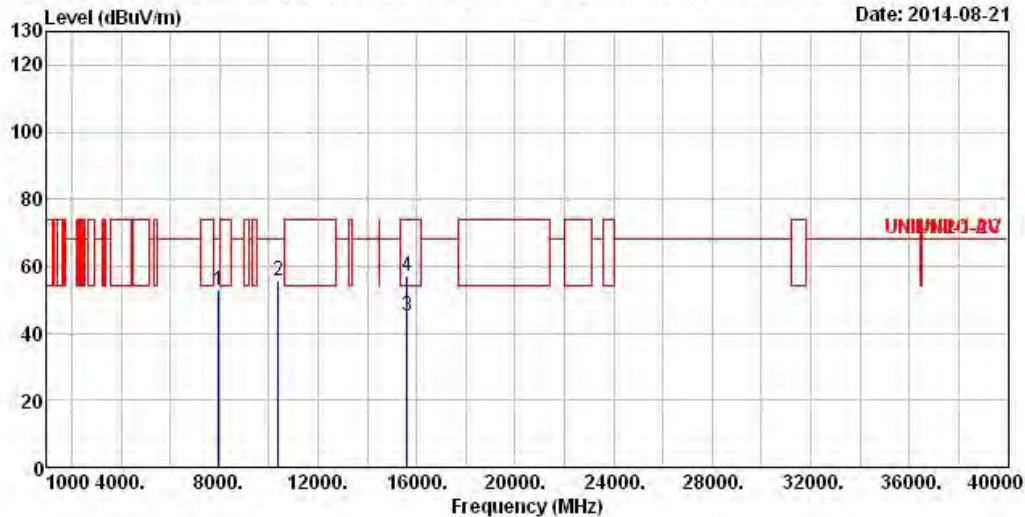

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7976.00	52.65	-15.55	68.20	40.10	37.07	8.28	32.80	Peak	---	---
2	10400.00	55.60	-12.60	68.20	40.39	39.00	8.94	32.73	Peak	---	---
3	15600.00	45.30	-8.70	54.00	28.40	37.53	11.59	32.22	Average	---	---
4	15600.00	57.28	-16.72	74.00	40.38	37.53	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

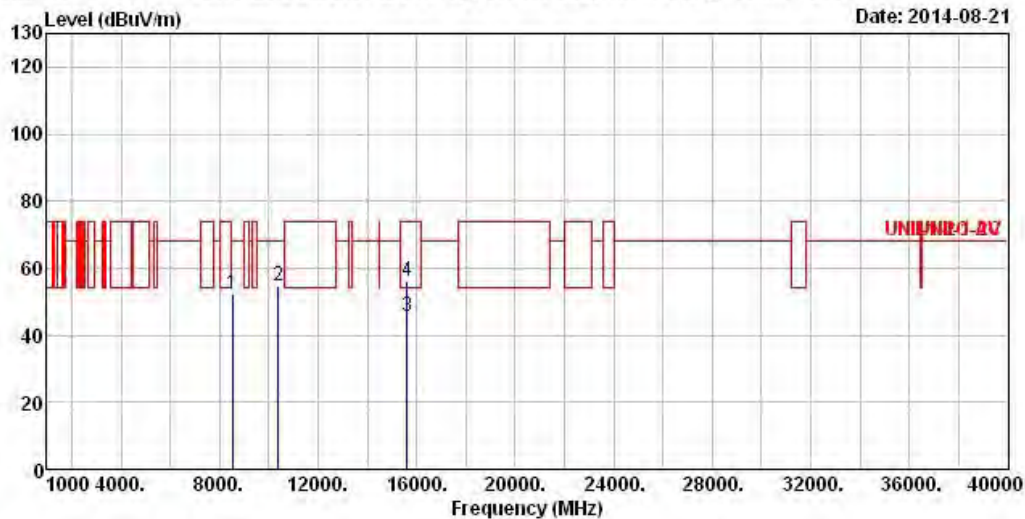

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8536.00	52.40	-15.80	68.20	39.13	38.11	7.99	32.83	Peak	---	---
2	10400.00	54.73	-13.47	68.20	39.52	39.00	8.94	32.73	Peak	---	---
3	15600.00	45.35	-8.65	54.00	28.45	37.53	11.59	32.22	Average	---	---
4	15600.00	56.34	-17.66	74.00	39.44	37.53	11.59	32.22	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

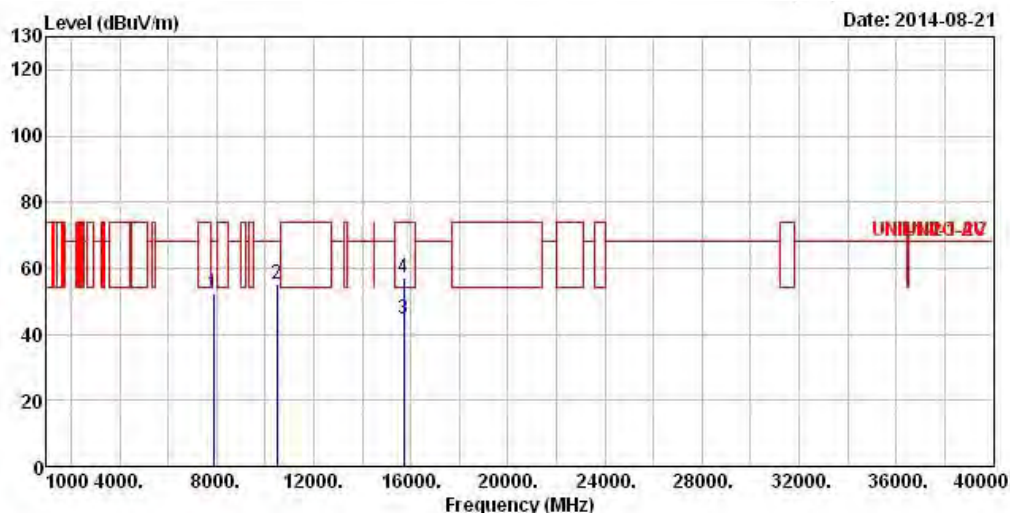

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7868.00	52.31	-15.89	68.20	40.05	36.97	8.07	32.78	Peak	---
2	10480.00	54.94	-13.26	68.20	39.62	39.00	8.99	32.67	Peak	---
3	15720.00	44.77	-9.23	54.00	28.09	37.34	11.59	32.25	Average	---
4	15720.00	56.99	-17.01	74.00	40.31	37.34	11.59	32.25	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

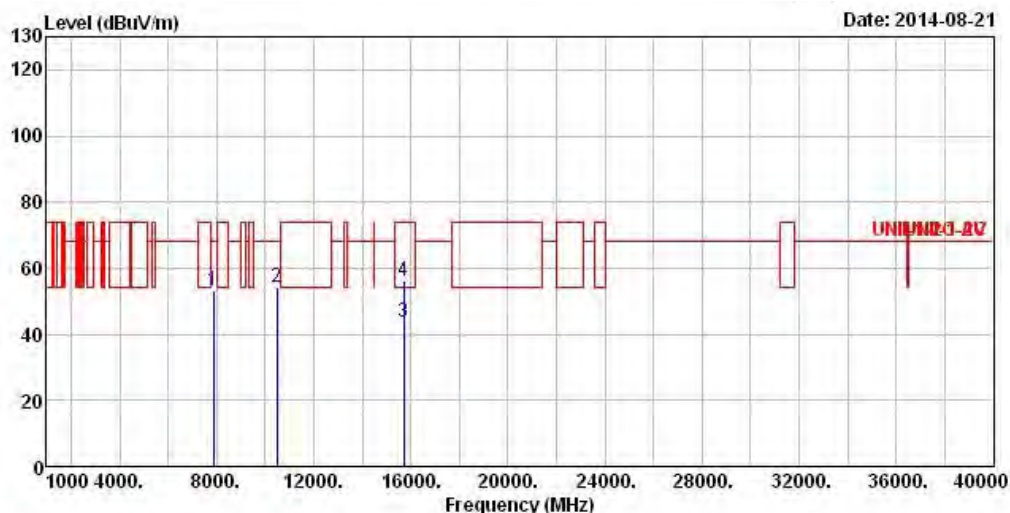

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7872.00	53.15	-15.05	68.20	40.89	36.97	8.07	32.78	Peak	---
2	10480.00	54.14	-14.06	68.20	38.82	39.00	8.99	32.67	Peak	---
3	15720.00	43.75	-10.25	54.00	27.07	37.34	11.59	32.25	Average	---
4	15720.00	56.09	-17.91	74.00	39.41	37.34	11.59	32.25	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N_{TX}	1	Polarization	V

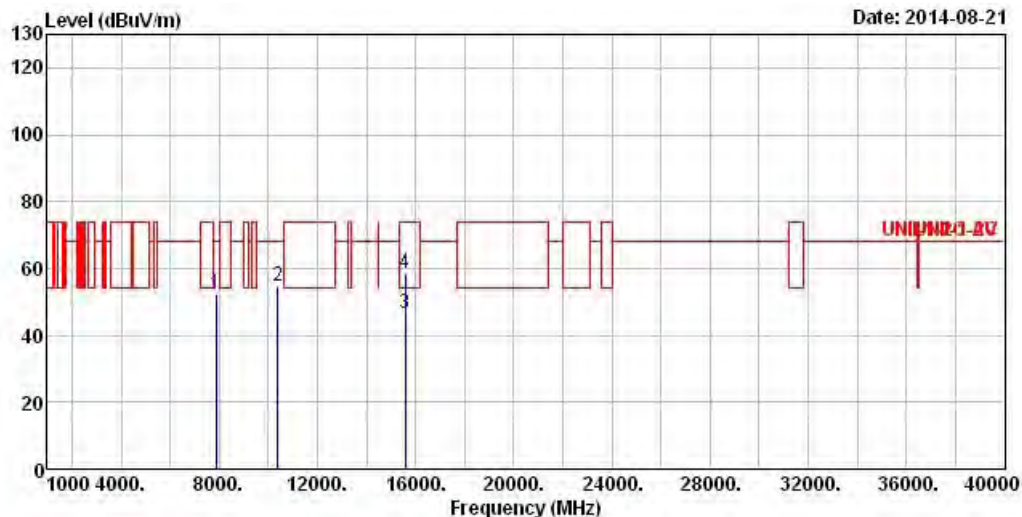

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7884.00	52.11	-16.09	68.20	39.77	36.98	8.14	32.78	Peak	---
2	10380.00	54.56	-13.64	68.20	39.37	39.00	8.94	32.75	Peak	---
3	15570.00	46.64	-7.36	54.00	29.66	37.59	11.59	32.20	Average	---
4	15570.00	58.33	-15.67	74.00	41.35	37.59	11.59	32.20	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N_{TX}	1	Polarization	H

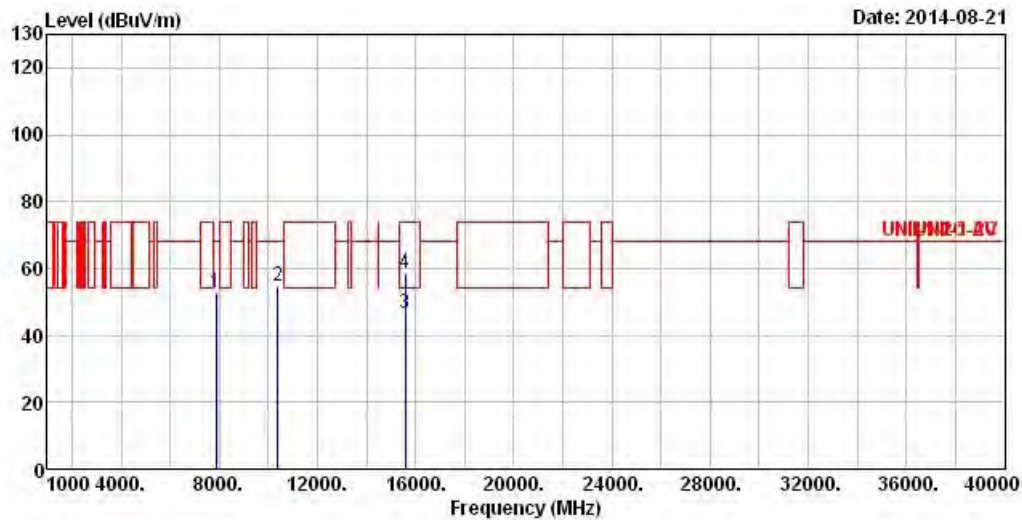

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	52.74	-15.46	68.20	40.40	36.98	8.14	32.78	Peak	---	---
2	10380.00	54.63	-13.57	68.20	39.44	39.00	8.94	32.75	Peak	---	---
3	15570.00	46.40	-7.60	54.00	29.42	37.59	11.59	32.20	Average	---	---
4	15570.00	58.38	-15.62	74.00	41.40	37.59	11.59	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	V

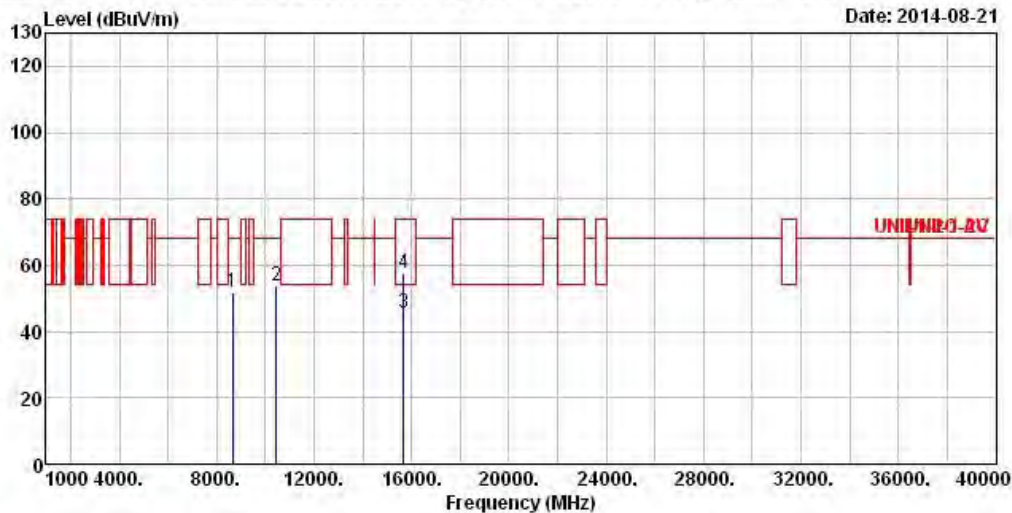

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8652.00	51.84	-16.36	68.20	38.61	38.16	7.93	32.86	Peak	---	---
2	10460.00	53.95	-14.25	68.20	38.65	39.00	8.99	32.69	Peak	---	---
3	15690.00	45.63	-8.37	54.00	28.88	37.40	11.59	32.24	Average	---	---
4	15690.00	57.69	-16.31	74.00	40.94	37.40	11.59	32.24	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N_{TX}	1	Polarization	H

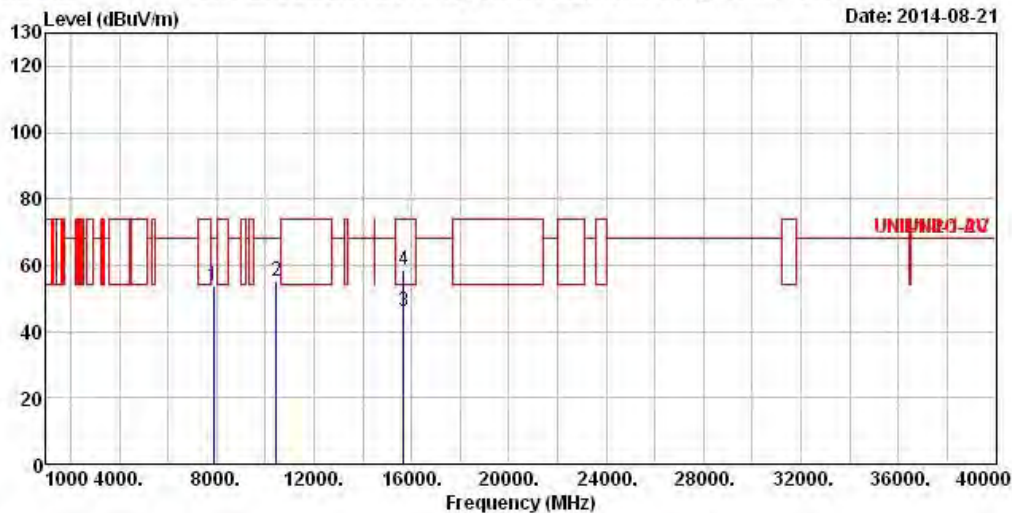

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	53.71	-14.49	68.20	41.37	36.98	8.14	32.78	Peak	---	---
2	10460.00	55.29	-12.91	68.20	39.99	39.00	8.99	32.69	Peak	---	---
3	15690.00	45.87	-8.13	54.00	29.12	37.40	11.59	32.24	Average	---	---
4	15690.00	58.43	-15.57	74.00	41.68	37.40	11.59	32.24	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N_{TX}	1	Polarization	V

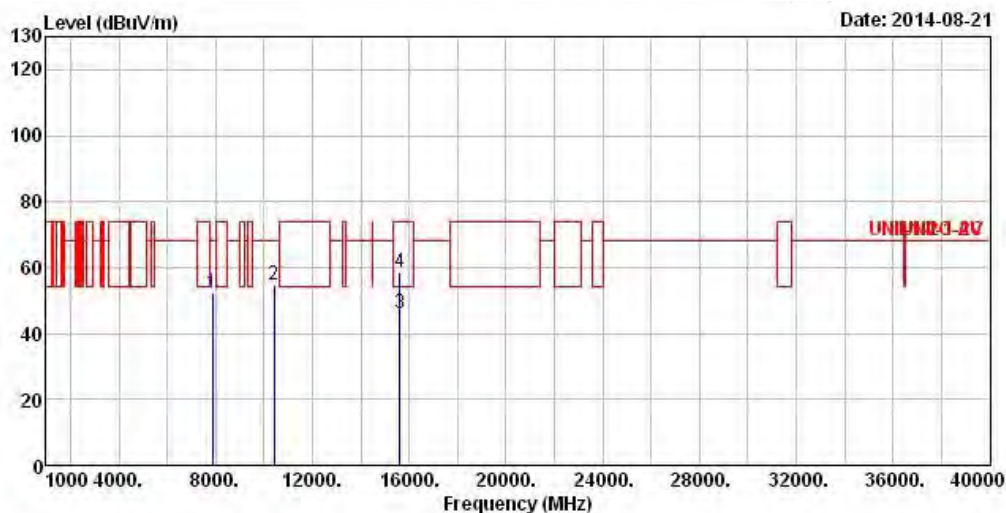

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	52.12	-16.08	68.20	39.78	36.98	8.14	32.78	Peak	---	---
2	10420.00	54.67	-13.53	68.20	39.43	39.00	8.97	32.73	Peak	---	---
3	15630.00	46.17	-7.83	54.00	29.33	37.48	11.59	32.23	Average	---	---
4	15630.00	58.71	-15.29	74.00	41.87	37.48	11.59	32.23	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N_{TX}	1	Polarization	H

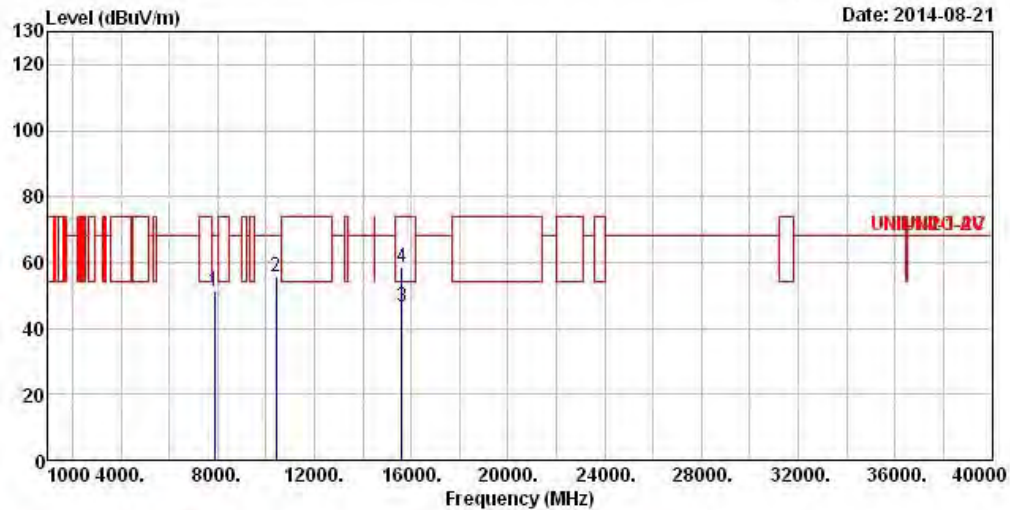

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	51.52	-16.68	68.20	39.18	36.98	8.14	32.78	Peak	---	---
2	10420.00	55.45	-12.75	68.20	40.21	39.00	8.97	32.73	Peak	---	---
3	15630.00	46.30	-7.70	54.00	29.46	37.48	11.59	32.23	Average	---	---
4	15630.00	58.45	-15.55	74.00	41.61	37.48	11.59	32.23	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

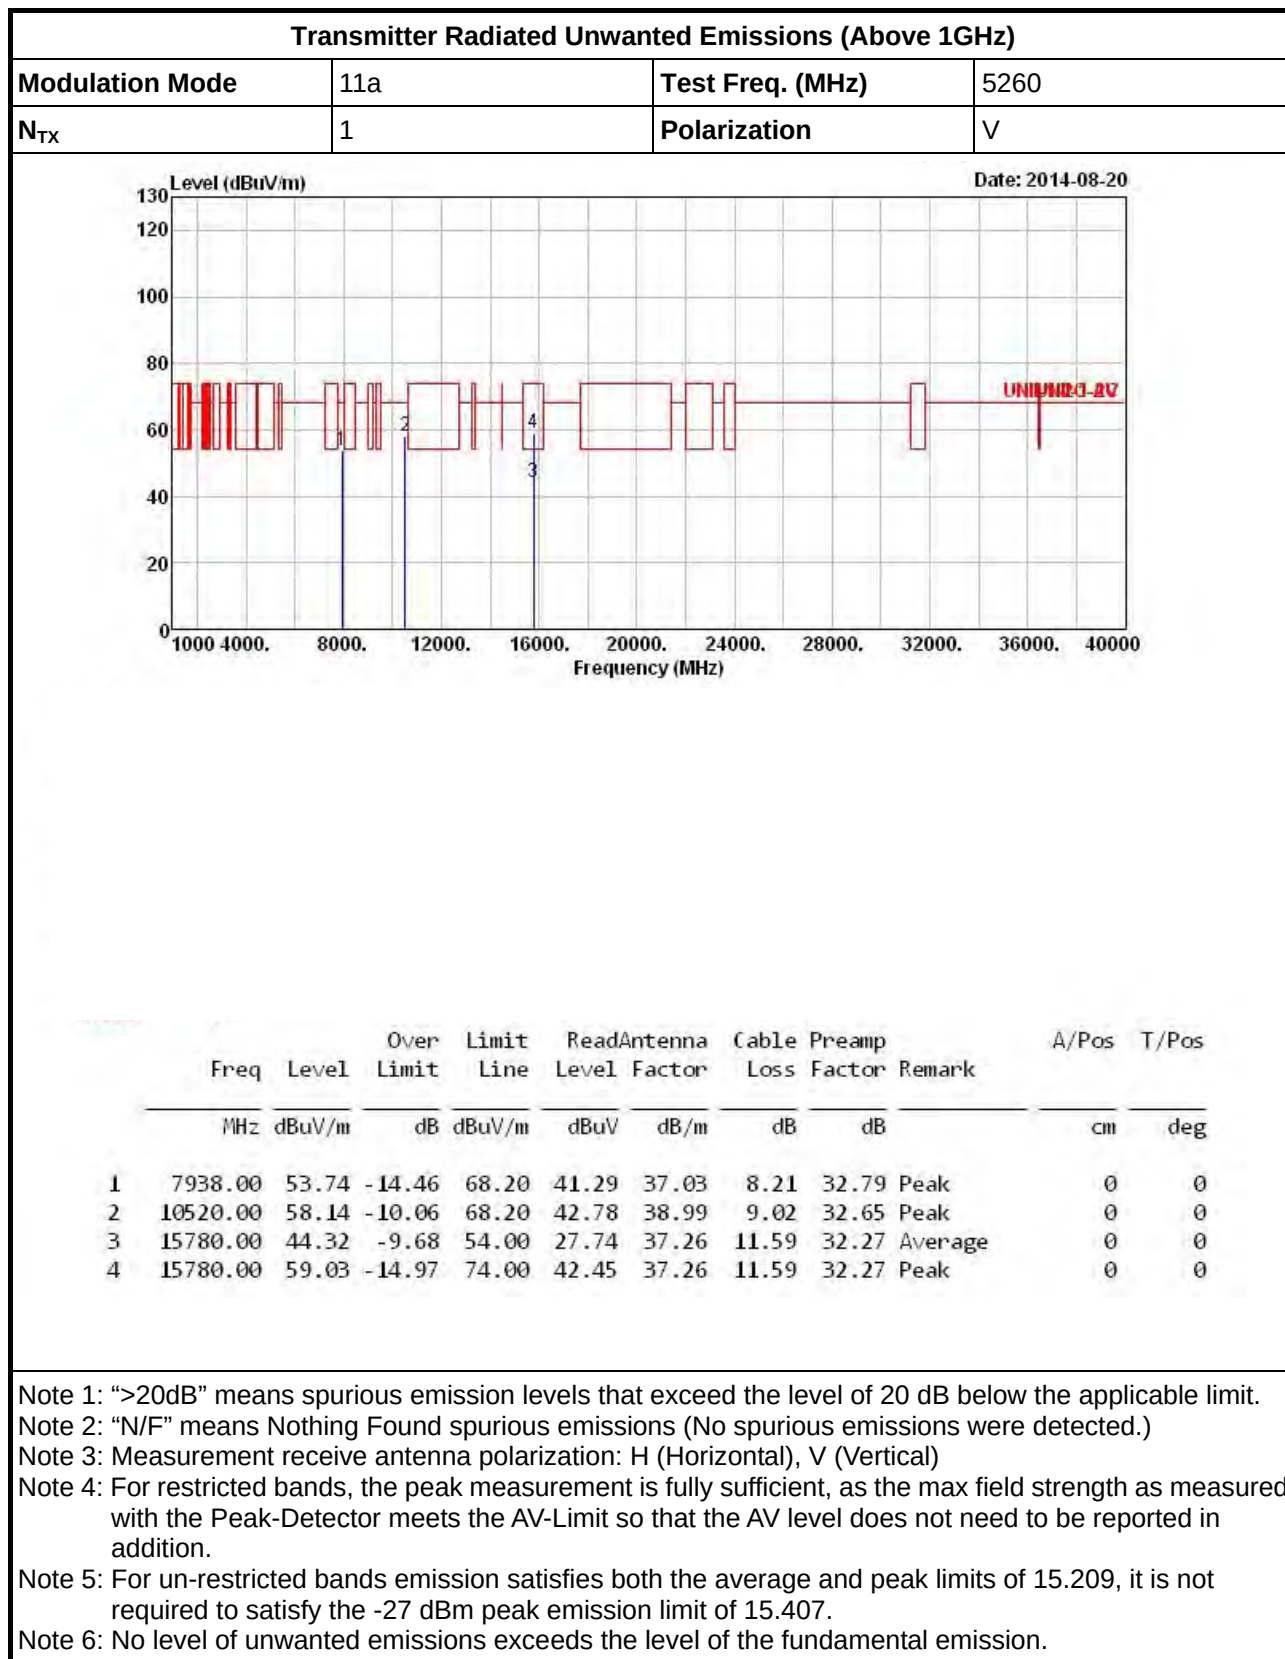3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5250-5350MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5260
N_{TX}	1	Polarization	H

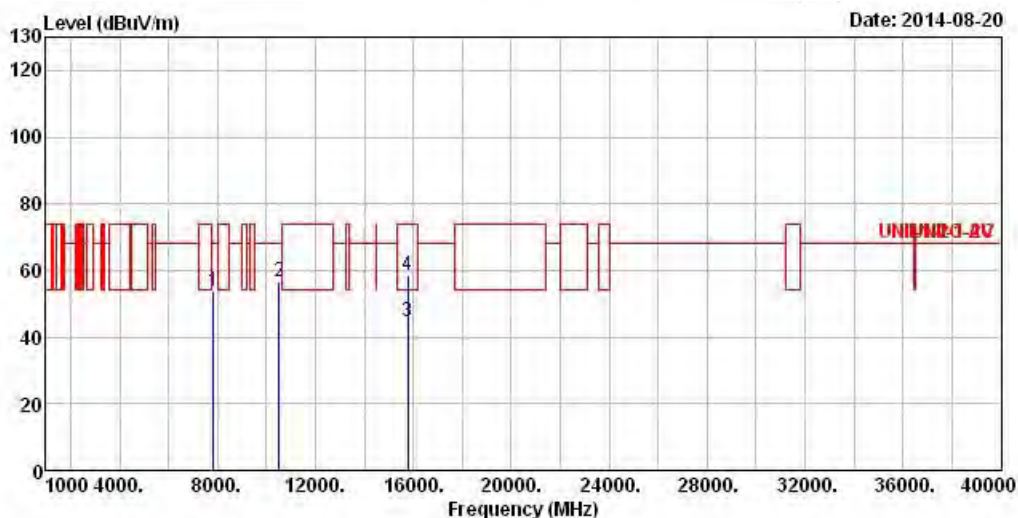

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7845.00	53.67	-14.53	68.20	41.42	36.95	8.07	32.77	Peak	0	0
2	10520.00	56.69	-11.51	68.20	41.33	38.99	9.02	32.65	Peak	0	0
3	15780.00	44.39	-9.61	54.00	27.81	37.26	11.59	32.27	Average	0	0
4	15780.00	58.37	-15.63	74.00	41.79	37.26	11.59	32.27	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	V

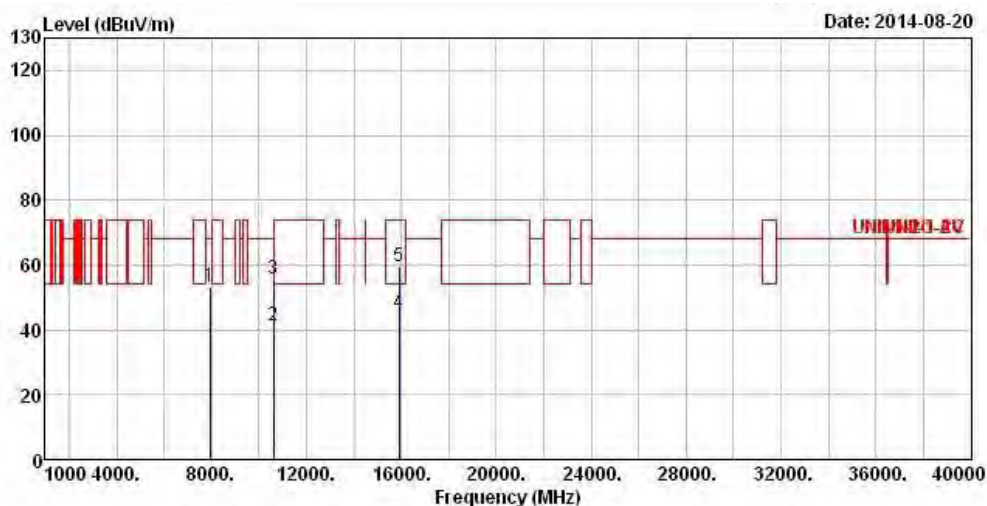

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7921.00	53.43	-14.77	68.20	41.05	37.02	8.14	32.78	Peak	0	0
2	10600.00	41.42	-12.58	54.00	26.01	38.96	9.06	32.61	Average	0	0
3	10600.00	55.62	-18.38	74.00	40.21	38.96	9.06	32.61	Peak	0	0
4	15900.00	44.90	-9.10	54.00	28.54	37.07	11.59	32.30	Average	0	0
5	15900.00	59.51	-14.49	74.00	43.15	37.07	11.59	32.30	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	H

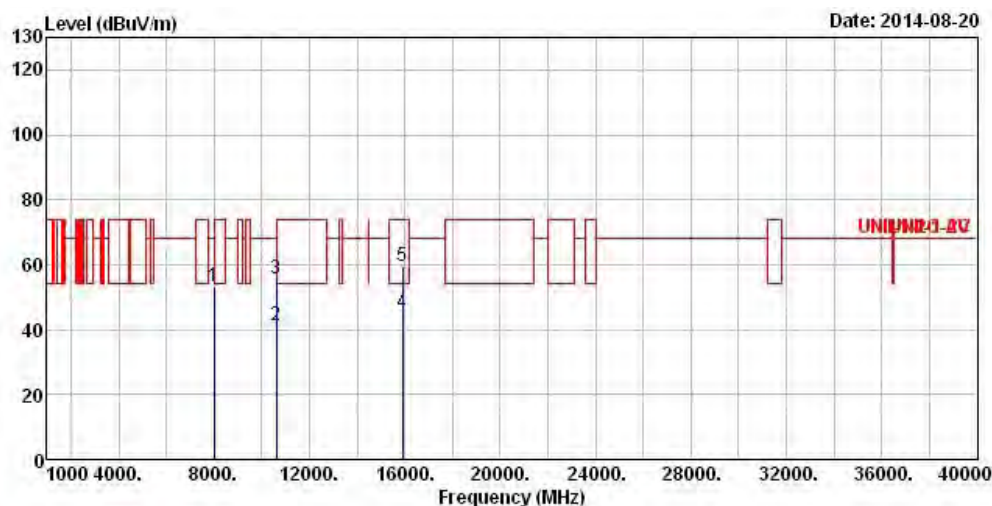

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8014.00	53.48	-14.72	68.20	40.89	37.13	8.26	32.80	Peak	0	0
2	10600.00	41.13	-12.87	54.00	25.72	38.96	9.06	32.61	Average	0	0
3	10600.00	55.78	-12.42	68.20	40.37	38.96	9.06	32.61	Peak	0	0
4	15900.00	45.29	-8.71	54.00	28.93	37.07	11.59	32.30	Average	0	0
5	15900.00	59.26	-14.74	74.00	42.90	37.07	11.59	32.30	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	V

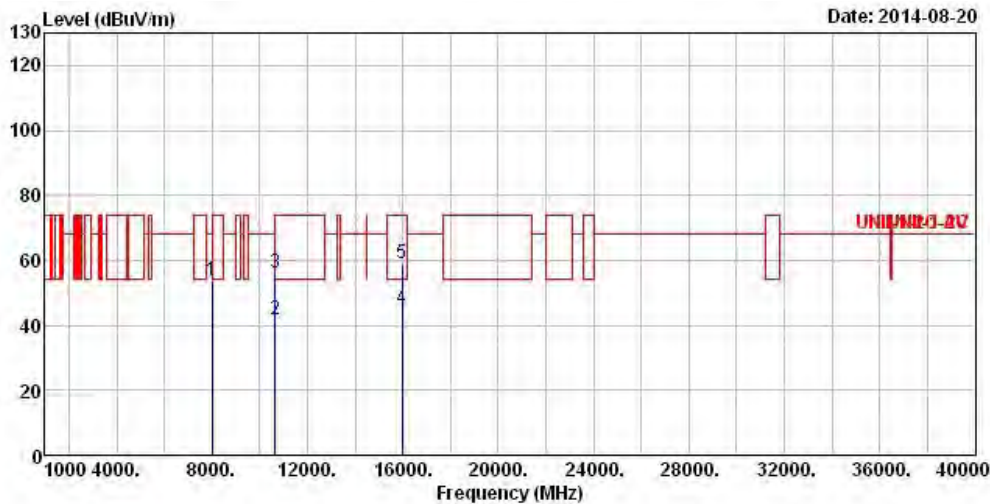

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8004.00	53.58	-14.62	68.20	41.02	37.10	8.26	32.80	Peak	0	0
2	10640.00	41.55	-12.45	54.00	26.12	38.94	9.07	32.58	Average	0	0
3	10640.00	56.12	-17.88	74.00	40.69	38.94	9.07	32.58	Peak	0	0
4	15960.00	45.06	-8.94	54.00	28.83	36.96	11.59	32.32	Average	0	0
5	15960.00	59.03	-14.97	74.00	42.80	36.96	11.59	32.32	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	H

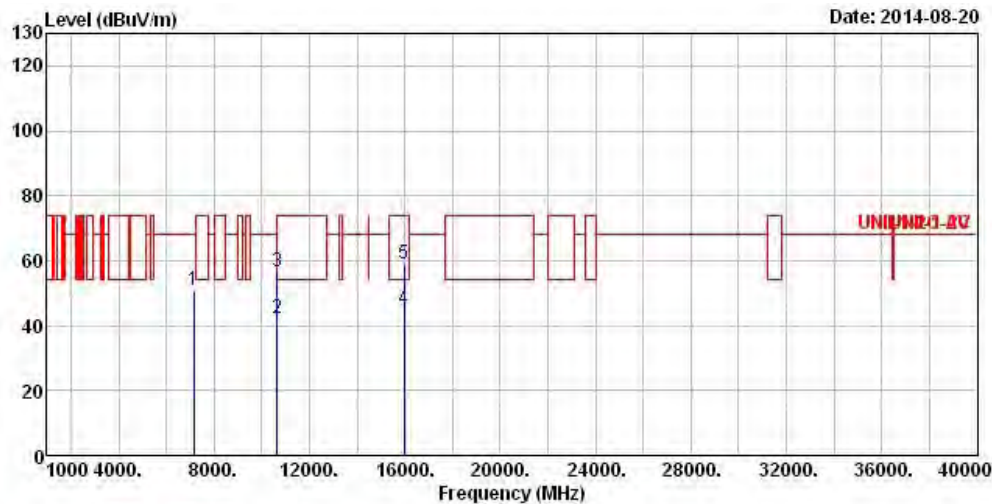

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7146.00	51.04	-17.16	68.20	40.79	35.70	7.17	32.62	Peak	0	0
2	10640.00	42.15	-11.85	54.00	26.72	38.94	9.07	32.58	Average	0	0
3	10640.00	56.45	-17.55	74.00	41.02	38.94	9.07	32.58	Peak	0	0
4	15960.00	45.00	-9.00	54.00	28.77	36.96	11.59	32.32	Average	0	0
5	15960.00	58.98	-15.02	74.00	42.75	36.96	11.59	32.32	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5260
N_{TX}	1	Polarization	V

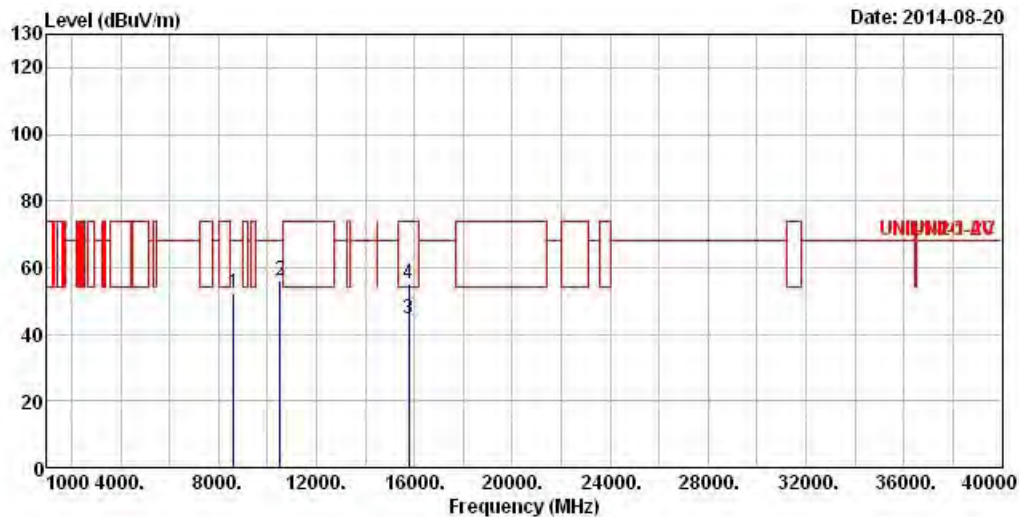

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8617.00	52.52	-15.68	68.20	39.27	38.15	7.95	32.85	Peak	---
2	10520.00	56.25	-11.95	68.20	40.89	38.99	9.02	32.65	Peak	---
3	15780.00	44.85	-9.15	54.00	28.27	37.26	11.59	32.27	Average	---
4	15780.00	55.01	-18.99	74.00	38.43	37.26	11.59	32.27	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5260
N_{TX}	1	Polarization	H

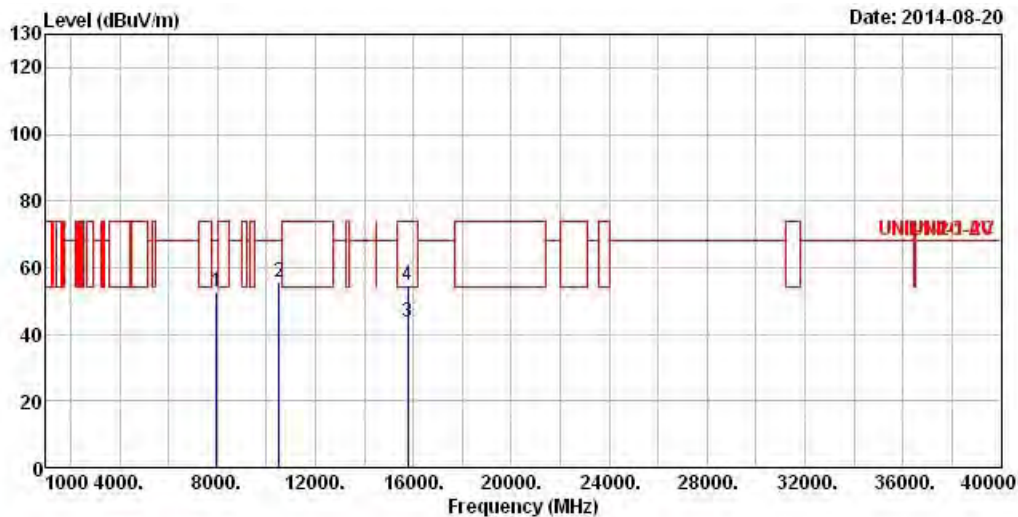

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	/MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7966.00	52.92	-15.28	68.20	40.36	37.07	8.28	32.79	Peak	---
2	10520.00	55.67	-12.53	68.20	40.31	38.99	9.02	32.65	Peak	---
3	15780.00	43.71	-10.29	54.00	27.13	37.26	11.59	32.27	Average	---
4	15780.00	54.63	-19.37	74.00	38.05	37.26	11.59	32.27	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	V

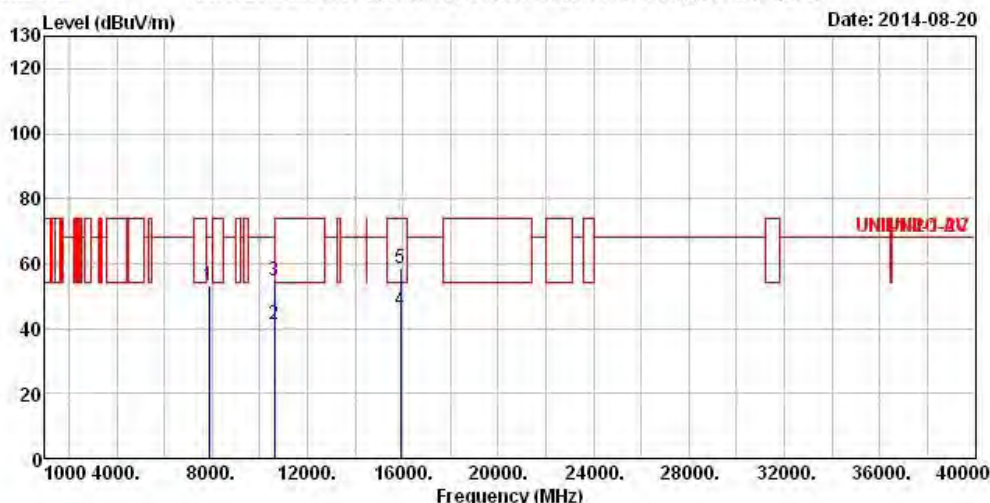

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	53.37	-14.83	68.20	41.03	36.98	8.14	32.78	Peak	---	---
2	10600.00	41.11	-12.89	54.00	25.70	38.96	9.06	32.61	Average	---	---
3	10600.00	54.75	-13.45	68.20	39.34	38.96	9.06	32.61	Peak	---	---
4	15900.00	45.58	-8.42	54.00	29.22	37.07	11.59	32.30	Average	---	---
5	15900.00	58.58	-15.42	74.00	42.22	37.07	11.59	32.30	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	H

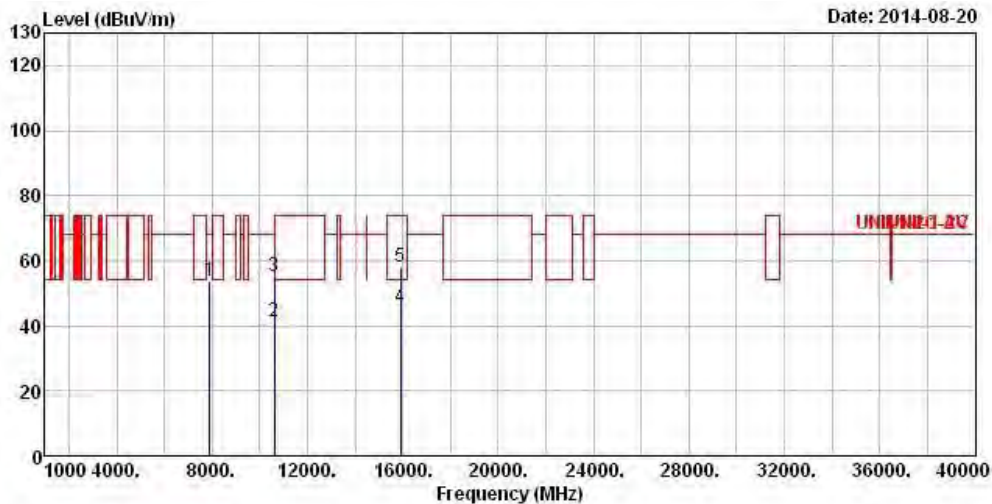

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7903.00	53.96	-14.24	68.20	41.60	37.00	8.14	32.78 Peak	---	---
2	10600.00	41.20	-12.80	54.00	25.79	38.96	9.06	32.61 Average	---	---
3	10600.00	55.26	-18.74	74.00	39.85	38.96	9.06	32.61 Peak	---	---
4	15900.00	45.64	-8.36	54.00	29.28	37.07	11.59	32.30 Average	---	---
5	15900.00	58.00	-16.00	74.00	41.64	37.07	11.59	32.30 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	V

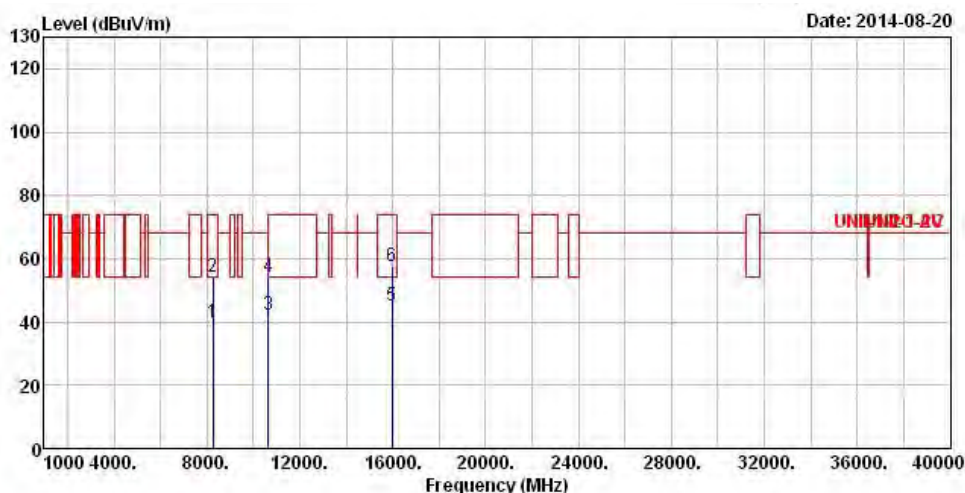

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8250.00	39.70	-14.30	54.00	26.79	37.58	8.13	32.80 Average	---	---
2	8250.00	54.38	-19.62	74.00	41.47	37.58	8.13	32.80 Peak	---	---
3	10640.00	42.00	-12.00	54.00	26.57	38.94	9.07	32.58 Average	---	---
4	10640.00	54.16	-19.84	74.00	38.73	38.94	9.07	32.58 Peak	---	---
5	15960.00	45.15	-8.85	54.00	28.92	36.96	11.59	32.32 Average	---	---
6	15960.00	57.53	-16.47	74.00	41.30	36.96	11.59	32.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	H

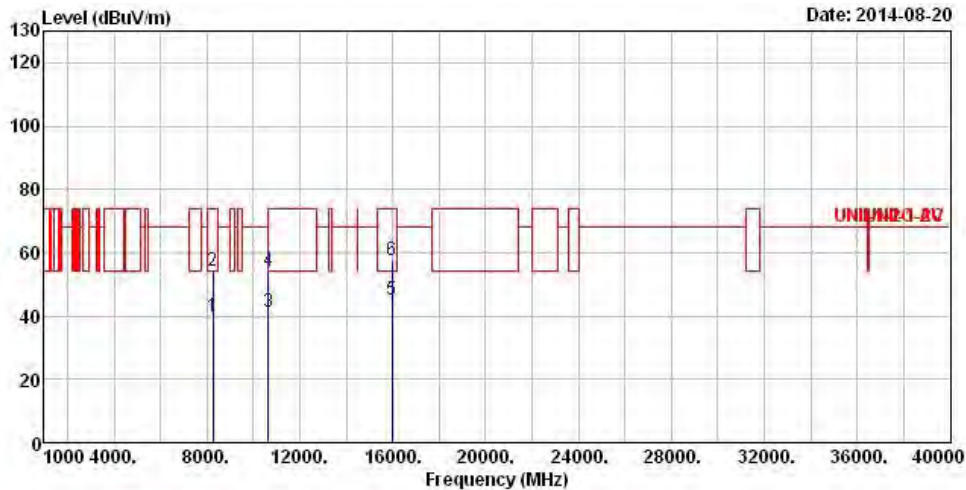

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8250.00	39.79	-14.21	54.00	26.88	37.58	8.13	32.80	Average	---
2	8250.00	54.38	-19.62	74.00	41.47	37.58	8.13	32.80	Peak	---
3	10640.00	41.49	-12.51	54.00	26.06	38.94	9.07	32.58	Average	---
4	10640.00	54.01	-19.99	74.00	38.58	38.94	9.07	32.58	Peak	---
5	15960.00	45.20	-8.80	54.00	28.97	36.96	11.59	32.32	Average	---
6	15960.00	57.33	-16.67	74.00	41.10	36.96	11.59	32.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5270
N_{TX}	1	Polarization	V

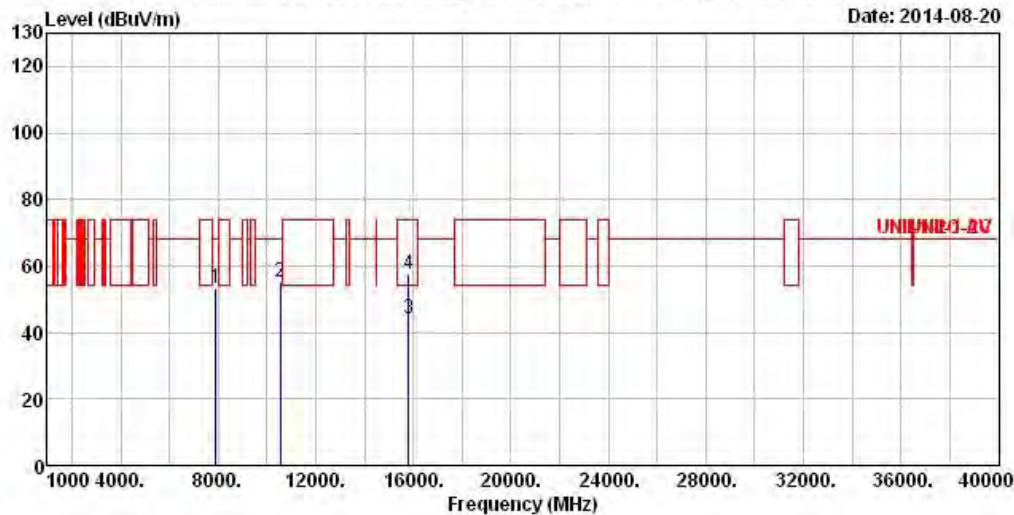

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7904.00	53.23	-14.97	68.20	40.87	37.00	8.14	32.78	Peak	---
2	10540.00	55.28	-12.92	68.20	39.89	38.99	9.04	32.64	Peak	---
3	15810.00	44.23	-9.77	54.00	27.72	37.20	11.59	32.28	Average	---
4	15810.00	57.56	-16.44	74.00	41.05	37.20	11.59	32.28	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5270
N _{TX}	1	Polarization	H

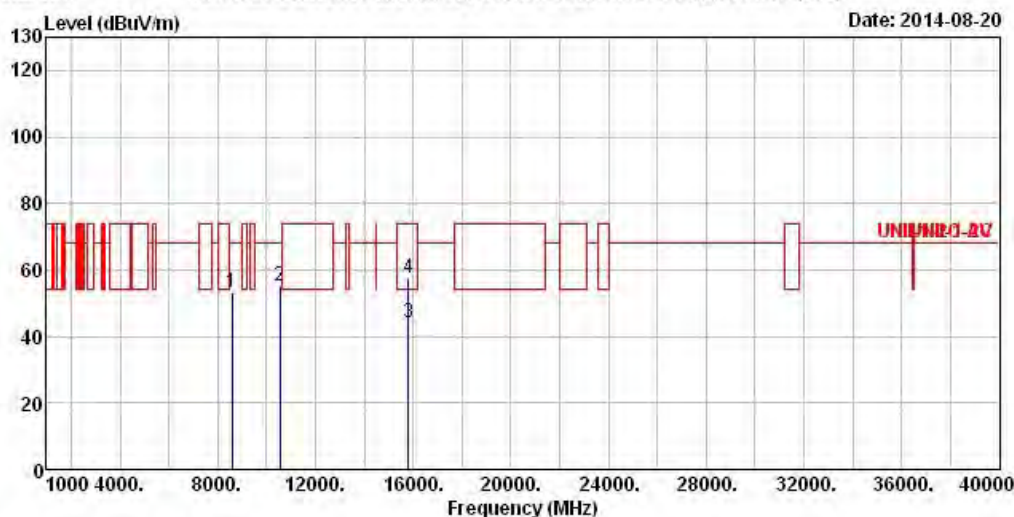

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8600.00	53.16	-15.04	68.20	39.91	38.14	7.95	32.84	Peak	---	---
2	10540.00	55.06	-13.14	68.20	39.67	38.99	9.04	32.64	Peak	---	---
3	15810.00	44.33	-9.67	54.00	27.82	37.20	11.59	32.28	Average	---	---
4	15810.00	57.39	-16.61	74.00	40.88	37.20	11.59	32.28	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5310
N_{TX}	1	Polarization	V

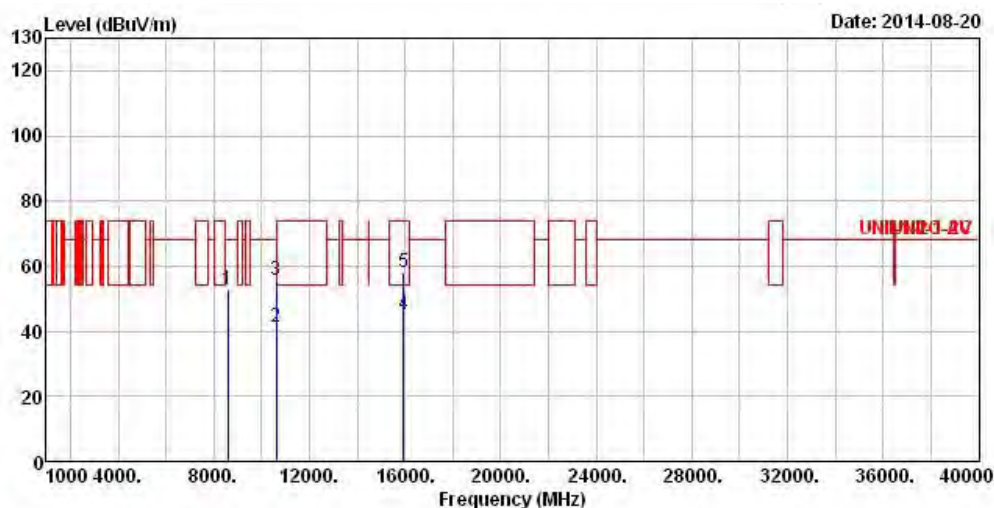

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8588.00	52.79	-15.41	68.20	39.55	38.13	7.95	32.84	Peak	---	---
2	10620.00	41.27	-12.73	54.00	25.84	38.95	9.07	32.59	Average	---	---
3	10620.00	55.52	-18.48	74.00	40.09	38.95	9.07	32.59	Peak	---	---
4	15930.00	45.12	-8.88	54.00	28.83	37.01	11.59	32.31	Average	---	---
5	15930.00	58.14	-15.86	74.00	41.85	37.01	11.59	32.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5310
N_{TX}	1	Polarization	H

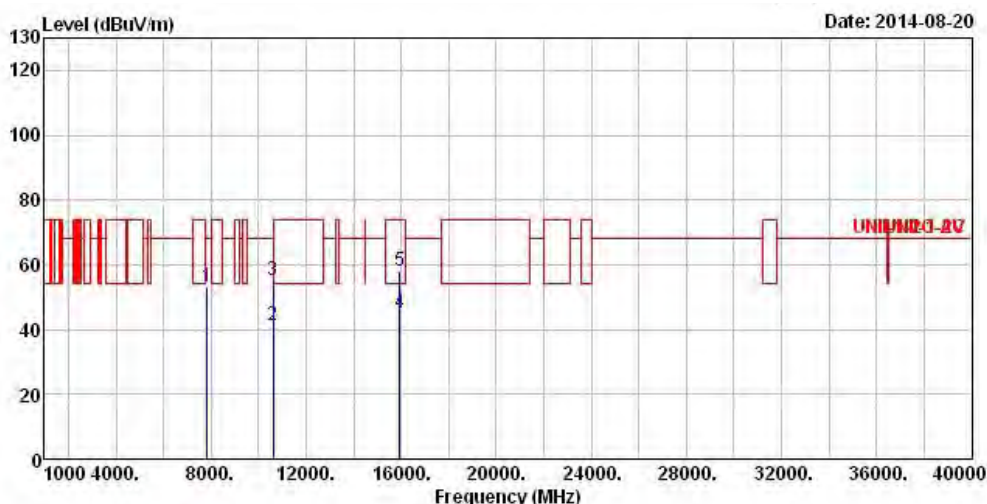

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7848.00	53.13	-15.07	68.20	40.89	36.95	8.07	32.78	Peak	---
2	10620.00	41.35	-12.65	54.00	25.92	38.95	9.07	32.59	Average	---
3	10620.00	55.33	-18.67	74.00	39.90	38.95	9.07	32.59	Peak	---
4	15930.00	45.09	-8.91	54.00	28.80	37.01	11.59	32.31	Average	---
5	15930.00	58.19	-15.81	74.00	41.90	37.01	11.59	32.31	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5260
N_{TX}	1	Polarization	V

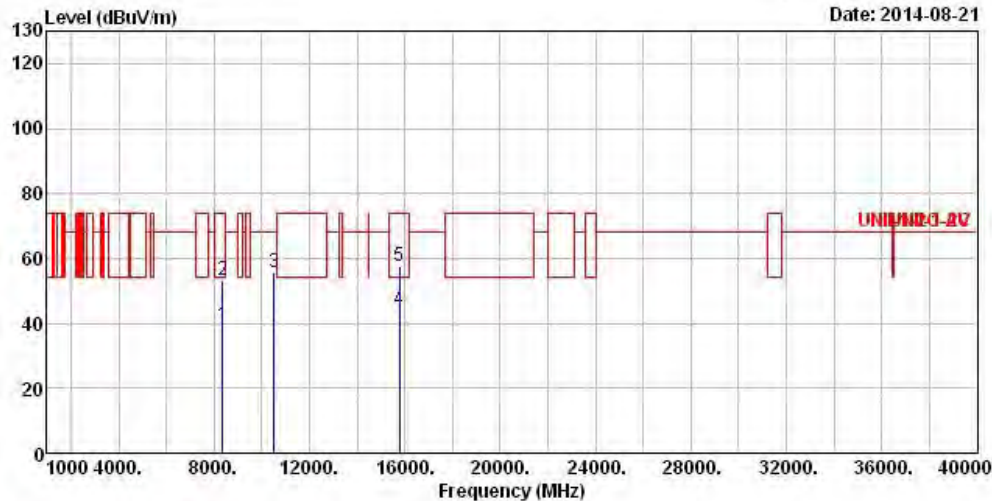

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8372.00	39.50	-14.50	54.00	26.38	37.86	8.07	32.81	Average	---	---
2	8372.00	53.01	-20.99	74.00	39.89	37.86	8.07	32.81	Peak	---	---
3	10520.00	55.70	-12.50	68.20	40.34	38.99	9.02	32.65	Peak	---	---
4	15780.00	44.25	-9.75	54.00	27.67	37.26	11.59	32.27	Average	---	---
5	15780.00	57.56	-16.44	74.00	40.98	37.26	11.59	32.27	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5260
N_{TX}	1	Polarization	H

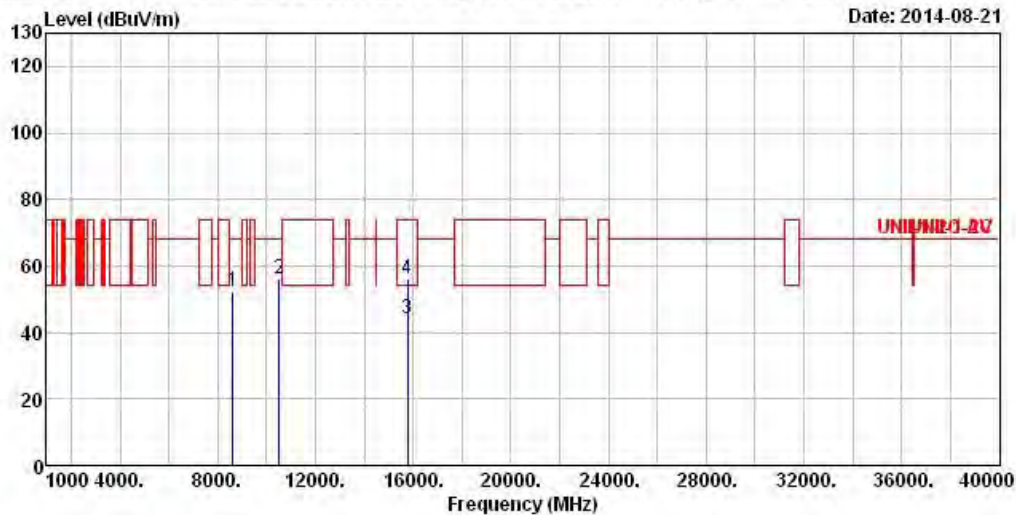

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8612.00	52.50	-15.70	68.20	39.25	38.15	7.95	32.85	Peak	---	---
2	10520.00	55.95	-12.25	68.20	40.59	38.99	9.02	32.65	Peak	---	---
3	15780.00	44.34	-9.66	54.00	27.76	37.26	11.59	32.27	Average	---	---
4	15780.00	56.01	-17.99	74.00	39.43	37.26	11.59	32.27	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	V

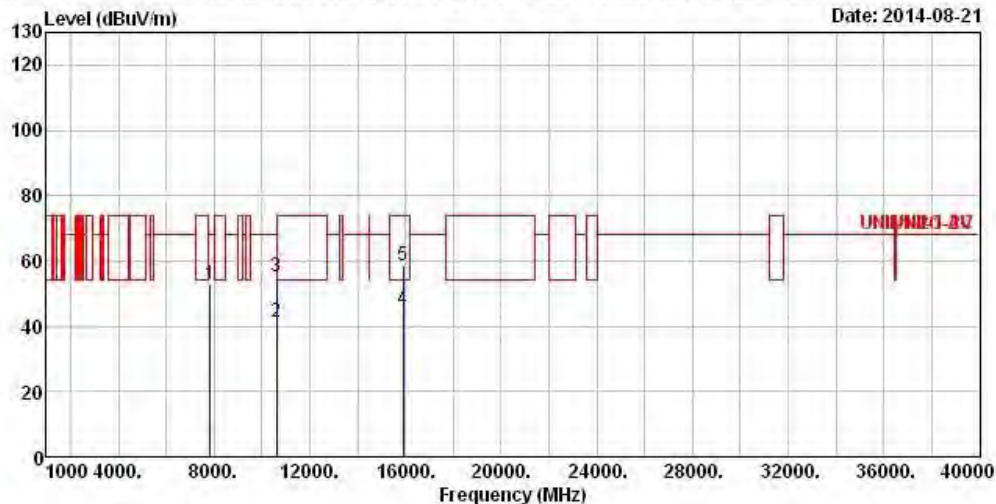

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7844.00	52.86	-15.34	68.20	40.68	36.95	8.00	32.77	Peak	---
2	10600.00	41.23	-12.77	54.00	25.82	38.96	9.06	32.61	Average	---
3	10600.00	55.08	-18.92	74.00	39.67	38.96	9.06	32.61	Peak	---
4	15900.00	45.08	-8.92	54.00	28.72	37.07	11.59	32.30	Average	---
5	15900.00	58.51	-15.49	74.00	42.15	37.07	11.59	32.30	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5300
N_{TX}	1	Polarization	H

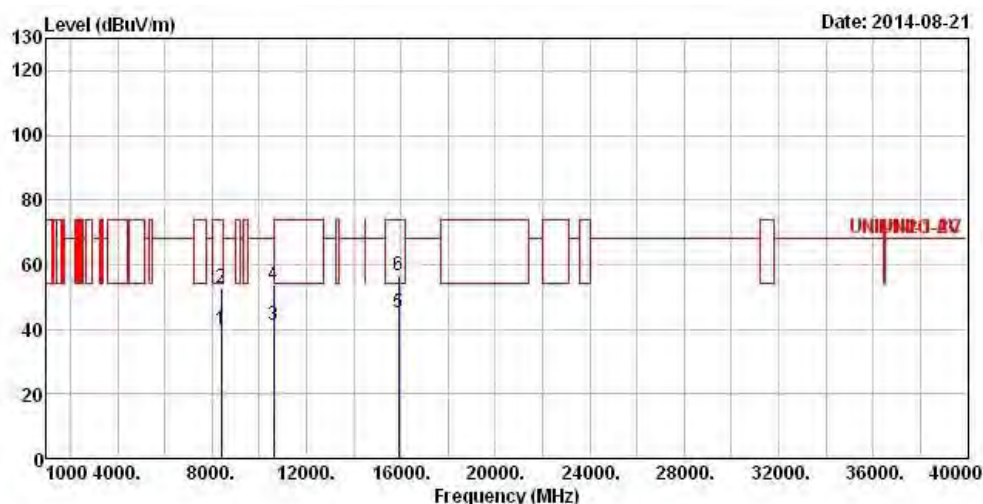

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8404.00	39.73	-14.27	54.00	26.56	37.93	8.05	32.81	Average	---	---
2	8404.00	52.68	-21.32	74.00	39.51	37.93	8.05	32.81	Peak	---	---
3	10600.00	41.35	-12.65	54.00	25.94	38.96	9.06	32.61	Average	---	---
4	10600.00	53.87	-20.13	74.00	38.46	38.96	9.06	32.61	Peak	---	---
5	15900.00	45.19	-8.81	54.00	28.83	37.07	11.59	32.30	Average	---	---
6	15900.00	56.77	-17.23	74.00	40.41	37.07	11.59	32.30	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	V

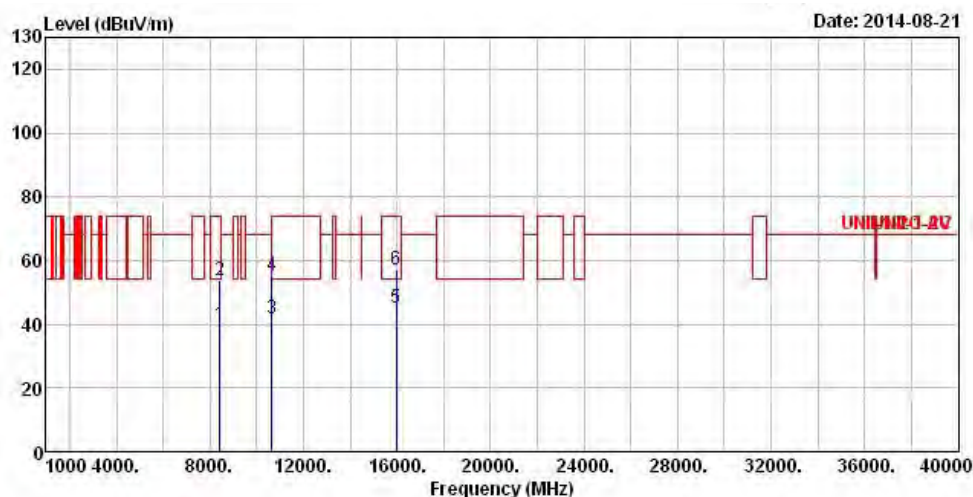

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8420.00	39.81	-14.19	54.00	26.64	37.93	8.05	32.81 Average	---	---
2	8420.00	53.59	-20.41	74.00	40.42	37.93	8.05	32.81 Peak	---	---
3	10640.00	41.61	-12.39	54.00	26.18	38.94	9.07	32.58 Average	---	---
4	10640.00	55.14	-18.86	74.00	39.71	38.94	9.07	32.58 Peak	---	---
5	15960.00	45.07	-8.93	54.00	28.84	36.96	11.59	32.32 Average	---	---
6	15960.00	57.25	-16.75	74.00	41.02	36.96	11.59	32.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	H

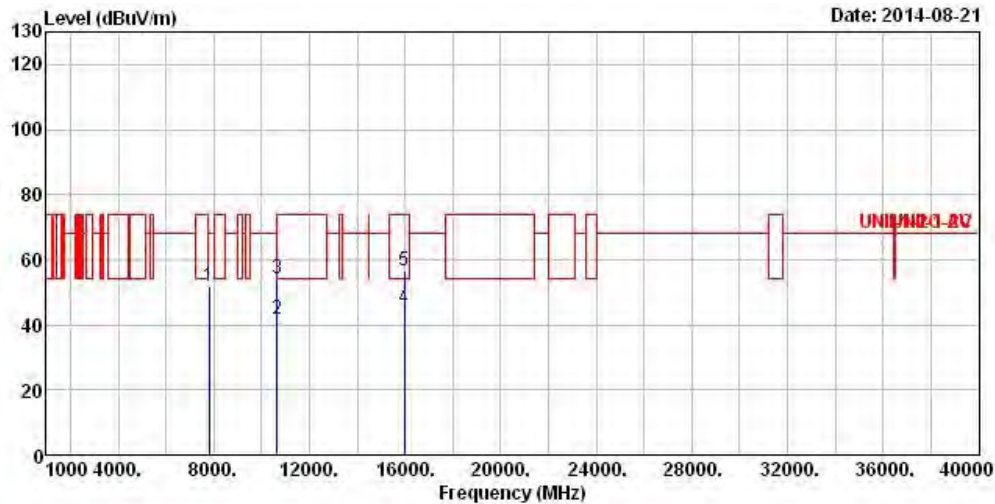

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7804.00	51.58	-16.62	68.20	39.52	36.90	7.93	32.77	Peak	---	---
2	10640.00	41.59	-12.41	54.00	26.16	38.94	9.07	32.58	Average	---	---
3	10640.00	54.34	-19.66	74.00	38.91	38.94	9.07	32.58	Peak	---	---
4	15960.00	45.09	-8.91	54.00	28.86	36.96	11.59	32.32	Average	---	---
5	15960.00	56.67	-17.33	74.00	40.44	36.96	11.59	32.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5270
N_{TX}	1	Polarization	V

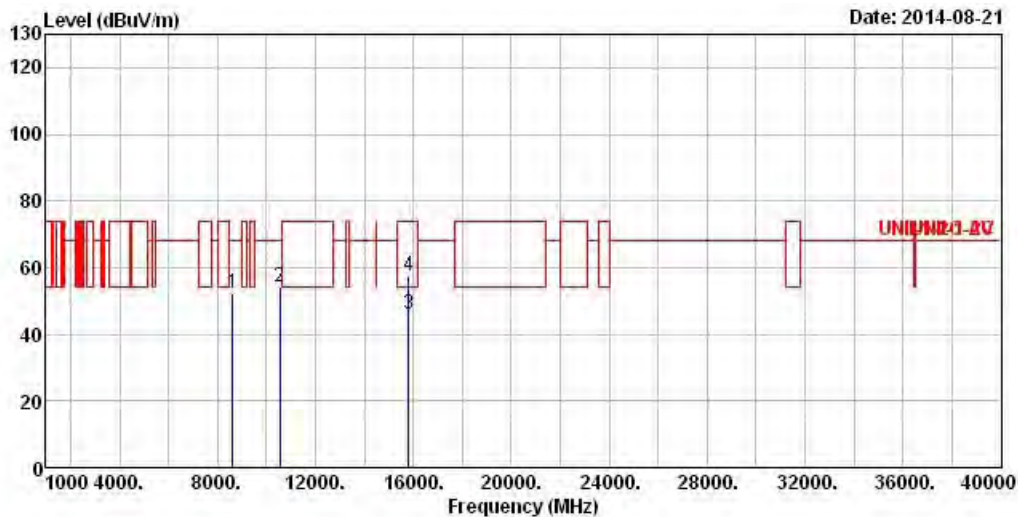

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8610.00	52.10	-16.10	68.20	38.84	38.15	7.95	32.84	Peak	---
2	10540.00	54.30	-13.90	68.20	38.91	38.99	9.04	32.64	Peak	---
3	15810.00	46.11	-7.89	54.00	29.60	37.20	11.59	32.28	Average	---
4	15810.00	57.47	-16.53	74.00	40.96	37.20	11.59	32.28	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5270
N_{TX}	1	Polarization	H

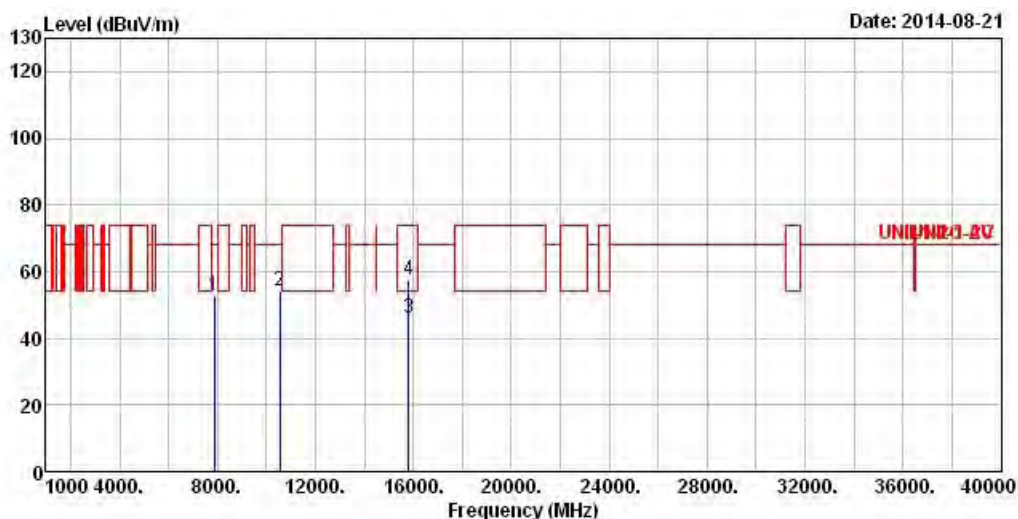

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	/MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	52.71	-15.49	68.20	40.37	36.98	8.14	32.78	Peak	---	---
2	10540.00	54.31	-13.89	68.20	38.92	38.99	9.04	32.64	Peak	---	---
3	15810.00	45.93	-8.07	54.00	29.42	37.20	11.59	32.28	Average	---	---
4	15810.00	57.59	-16.41	74.00	41.08	37.20	11.59	32.28	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5310
N_{TX}	1	Polarization	V

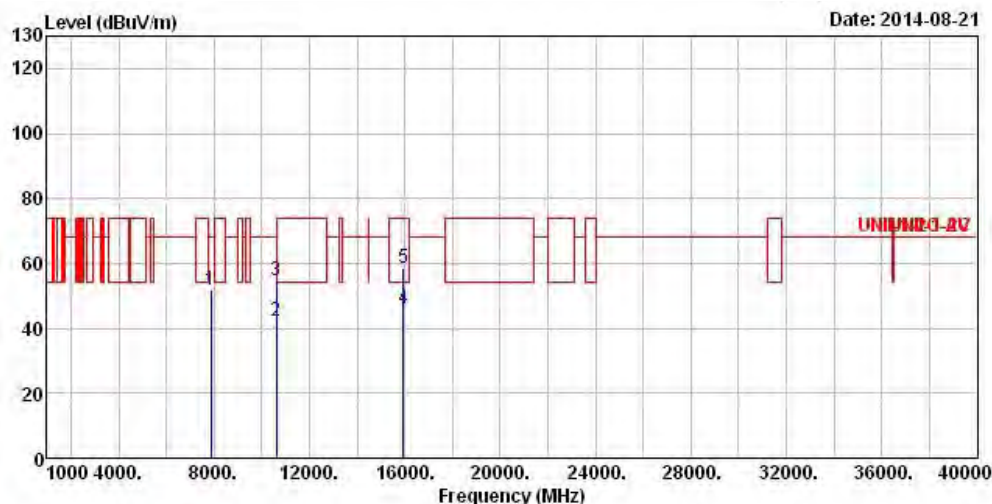

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	51.94	-16.26	68.20	39.60	36.98	8.14	32.78	Peak	---	---
2	10620.00	42.38	-11.62	54.00	26.95	38.95	9.07	32.59	Average	---	---
3	10620.00	54.56	-19.44	74.00	39.13	38.95	9.07	32.59	Peak	---	---
4	15930.00	45.96	-8.04	54.00	29.67	37.01	11.59	32.31	Average	---	---
5	15930.00	58.57	-15.43	74.00	42.28	37.01	11.59	32.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5310
N_{TX}	1	Polarization	H

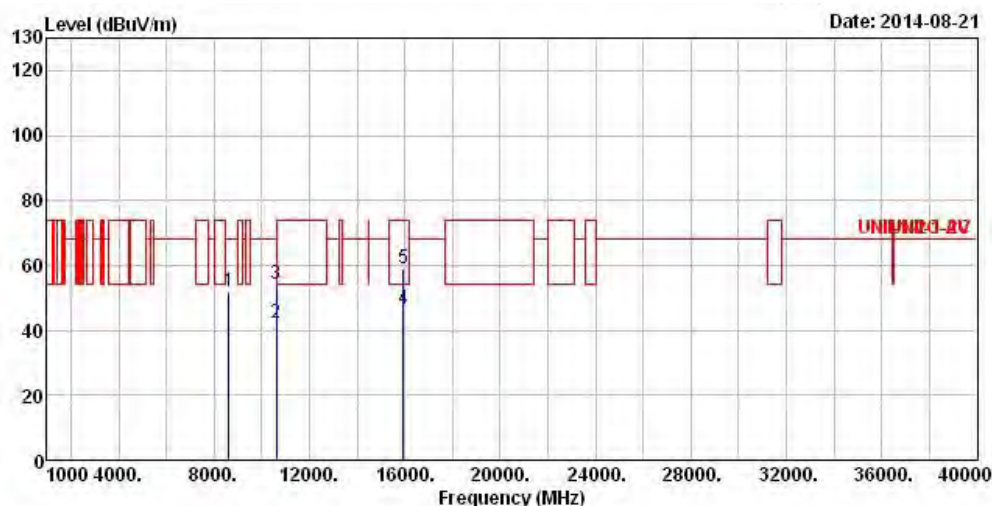

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8610.00	51.92	-16.28	68.20	38.66	38.15	7.95	32.84	Peak	---	---
2	10620.00	42.20	-11.80	54.00	26.77	38.95	9.07	32.59	Average	---	---
3	10620.00	54.30	-19.70	74.00	38.87	38.95	9.07	32.59	Peak	---	---
4	15930.00	46.47	-7.53	54.00	30.18	37.01	11.59	32.31	Average	---	---
5	15930.00	58.77	-15.23	74.00	42.48	37.01	11.59	32.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5290
N_{TX}	1	Polarization	V

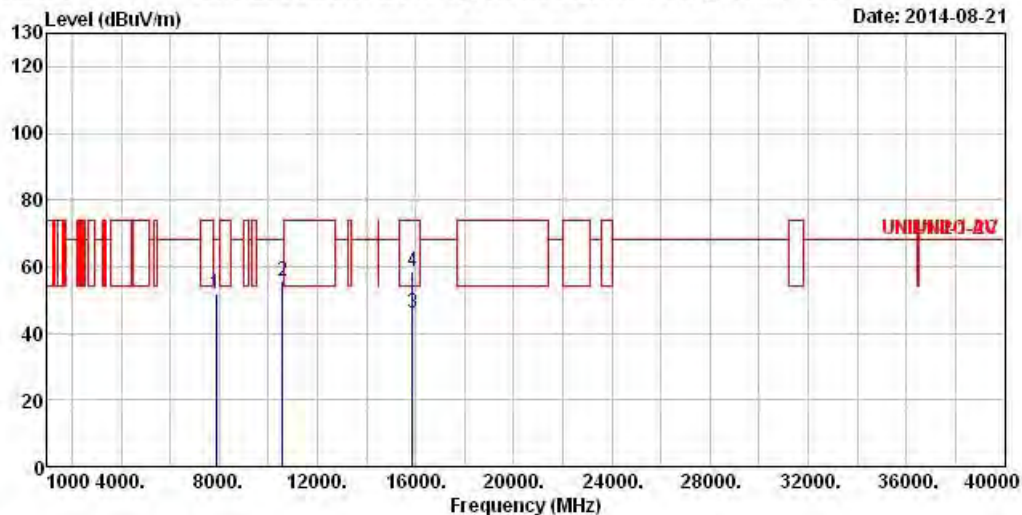

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	51.68	-16.52	68.20	39.34	36.98	8.14	32.78	Peak	---	---
2	10580.00	55.55	-12.65	68.20	40.13	38.97	9.06	32.61	Peak	---	---
3	15870.00	45.87	-8.13	54.00	29.48	37.09	11.59	32.29	Average	---	---
4	15870.00	58.38	-15.62	74.00	41.99	37.09	11.59	32.29	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5290
N_{TX}	1	Polarization	H

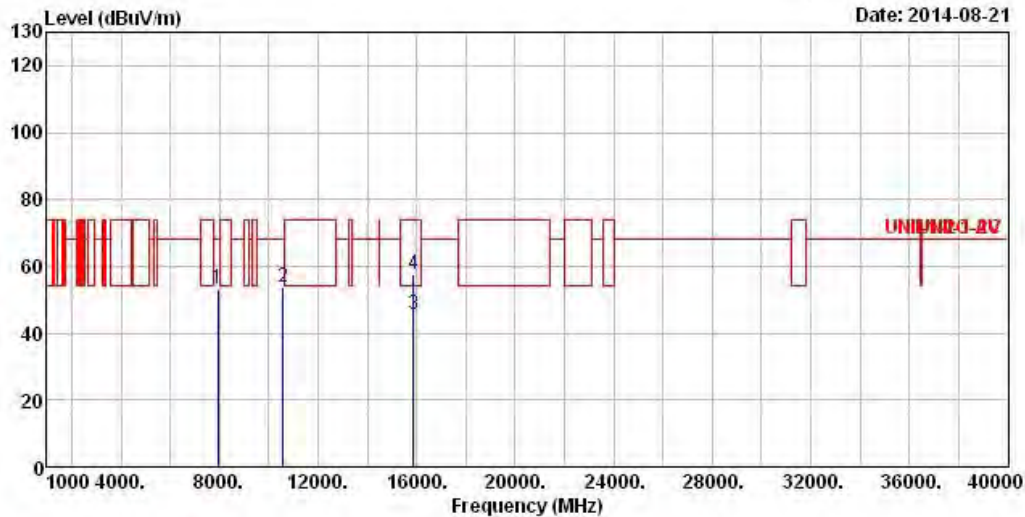

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7926.00	53.35	-14.85	68.20	40.91	37.02	8.21	32.79	Peak	---	---
2	10580.00	53.69	-14.51	68.20	38.27	38.97	9.06	32.61	Peak	---	---
3	15870.00	45.72	-8.28	54.00	29.33	37.09	11.59	32.29	Average	---	---
4	15870.00	57.56	-16.44	74.00	41.17	37.09	11.59	32.29	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

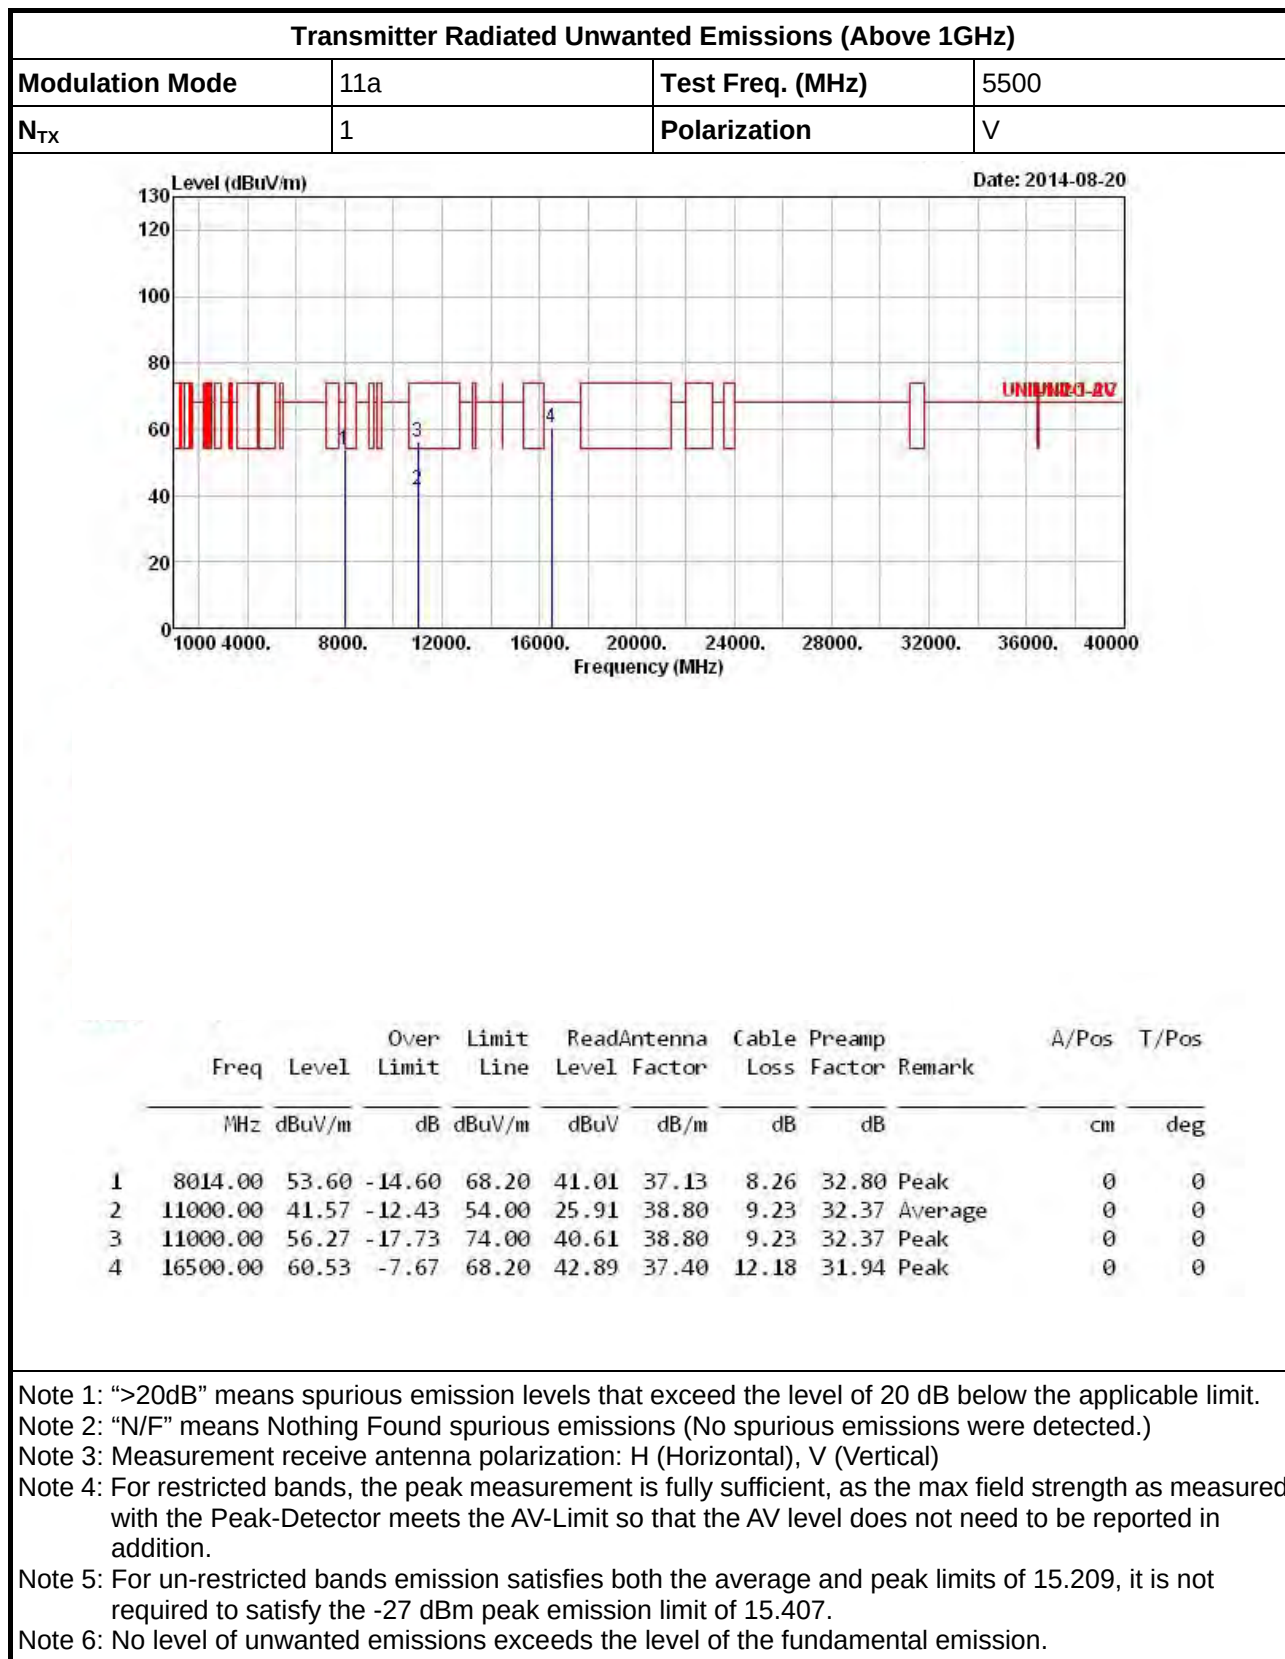3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5500
N_{TX}	1	Polarization	H

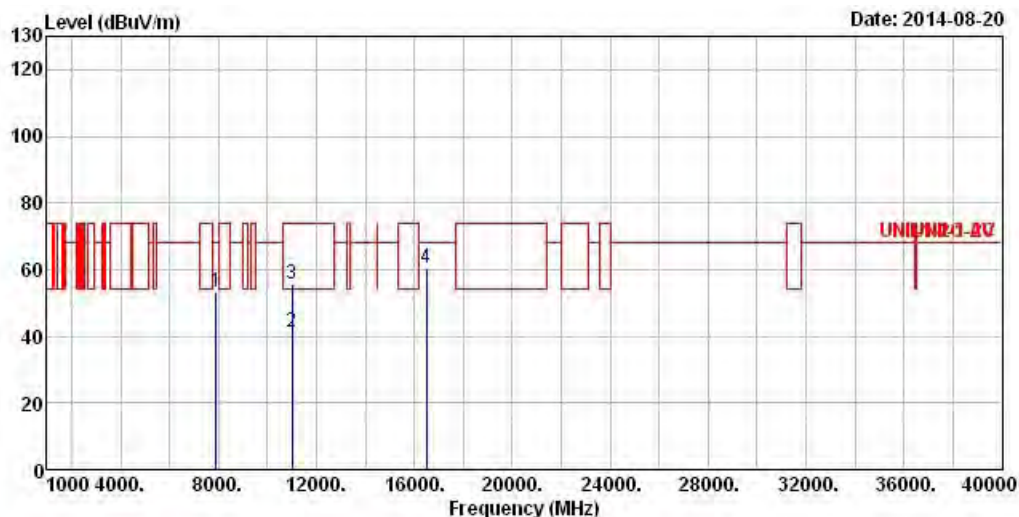

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7891.00	53.46	-14.74	68.20	41.12	36.98	8.14	32.78	Peak	0	0
2	11000.00	41.39	-12.61	54.00	25.73	38.80	9.23	32.37	Average	0	0
3	11000.00	55.82	-18.18	74.00	40.16	38.80	9.23	32.37	Peak	0	0
4	16500.00	60.25	-7.95	68.20	42.61	37.40	12.18	31.94	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5580
N_{TX}	1	Polarization	V

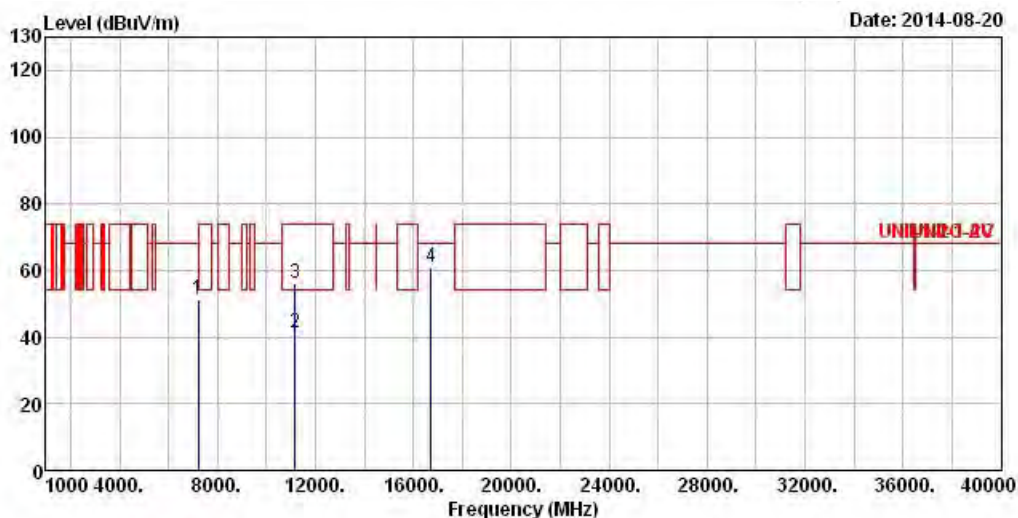

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7219.00	51.31	-16.89	68.20	40.87	35.88	7.20	32.64	Peak	0	0
2	11160.00	41.37	-12.63	54.00	25.22	38.97	9.54	32.36	Average	0	0
3	11160.00	56.36	-17.64	74.00	40.21	38.97	9.54	32.36	Peak	0	0
4	16740.00	60.90	-7.30	68.20	42.16	38.80	11.58	31.64	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5580
N_{TX}	1	Polarization	H

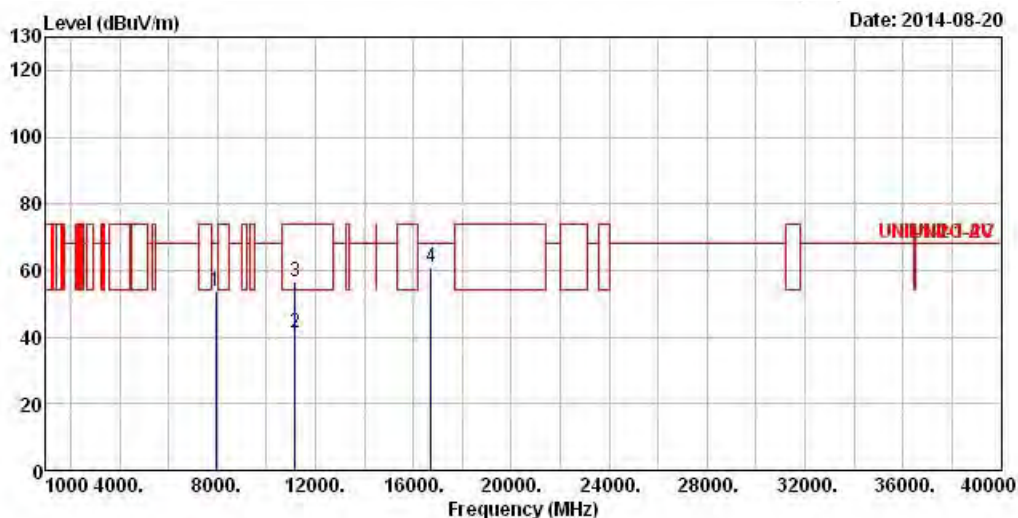

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7926.00	53.54	-14.66	68.20	41.10	37.02	8.21	32.79	Peak	0	0
2	11160.00	41.22	-12.78	54.00	25.07	38.97	9.54	32.36	Average	0	0
3	11160.00	56.41	-17.59	74.00	40.26	38.97	9.54	32.36	Peak	0	0
4	16740.00	60.85	-7.35	68.20	42.11	38.80	11.58	31.64	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5700
N _{TX}	1	Polarization	V

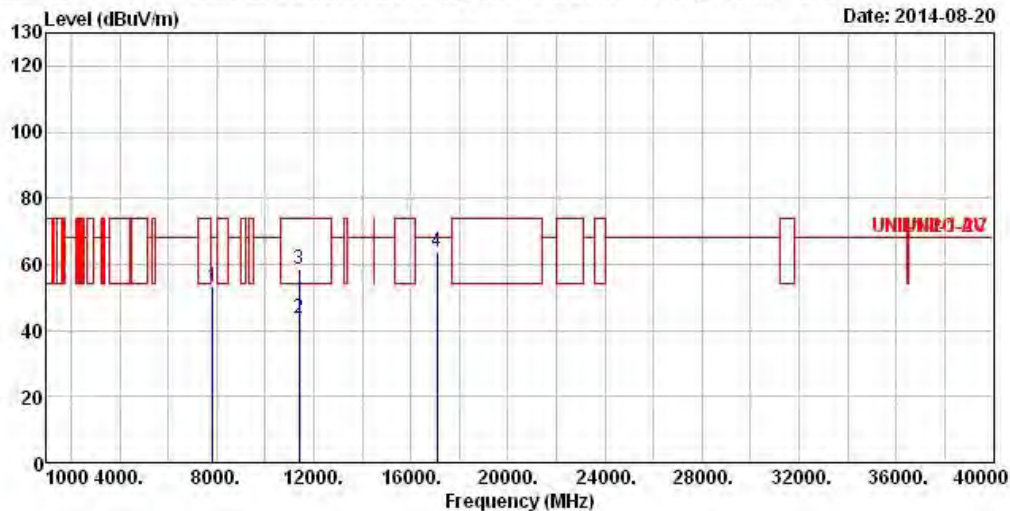

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7824.00	53.23	-14.97	68.20	41.08	36.92	8.00	32.77	Peak	0	0
2	11400.00	43.82	-10.18	54.00	27.05	39.20	9.92	32.35	Average	0	0
3	11400.00	58.62	-15.38	74.00	41.85	39.20	9.92	32.35	Peak	0	0
4	17100.00	63.68	-4.52	68.20	42.61	41.08	11.33	31.34	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5700
N_{TX}	1	Polarization	H

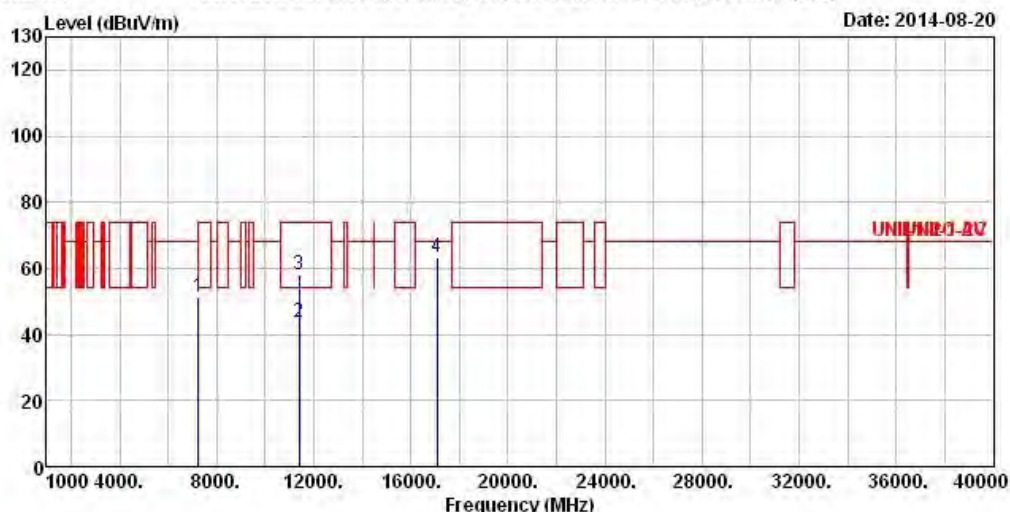

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7249.00	51.34	-16.86	68.20	40.79	35.97	7.23	32.65	Peak	0	0
2	11400.00	43.63	-10.37	54.00	26.86	39.20	9.92	32.35	Average	0	0
3	11400.00	57.98	-16.02	74.00	41.21	39.20	9.92	32.35	Peak	0	0
4	17100.00	63.49	-4.71	68.20	42.42	41.08	11.33	31.34	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5500
N_{TX}	1	Polarization	V

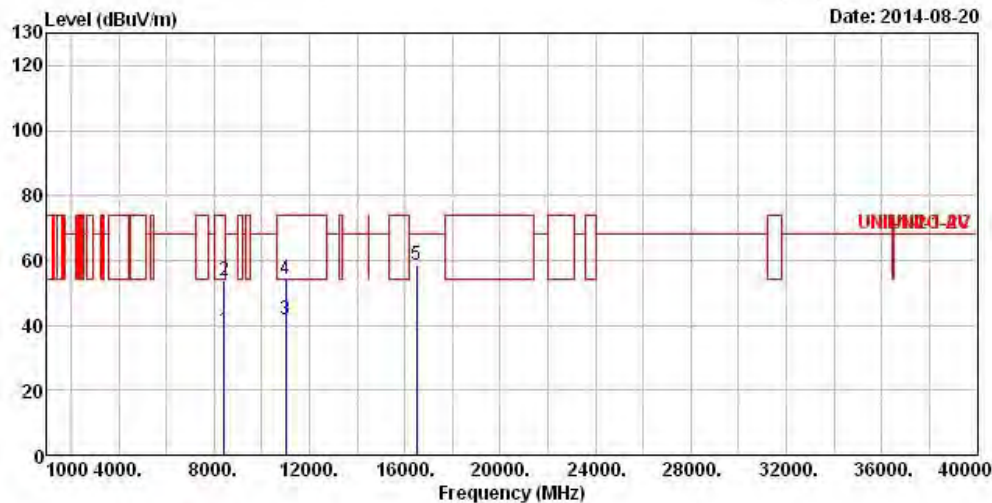

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8424.00	38.55	-15.45	54.00	25.35	37.96	8.05	32.81	Average	---	---
2	8424.00	53.81	-20.19	74.00	40.61	37.96	8.05	32.81	Peak	---	---
3	11000.00	41.53	-12.47	54.00	25.87	38.80	9.23	32.37	Average	---	---
4	11000.00	54.18	-19.82	74.00	38.52	38.80	9.23	32.37	Peak	---	---
5	16500.00	58.34	-9.86	68.20	40.70	37.40	12.18	31.94	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5500
N_{TX}	1	Polarization	H

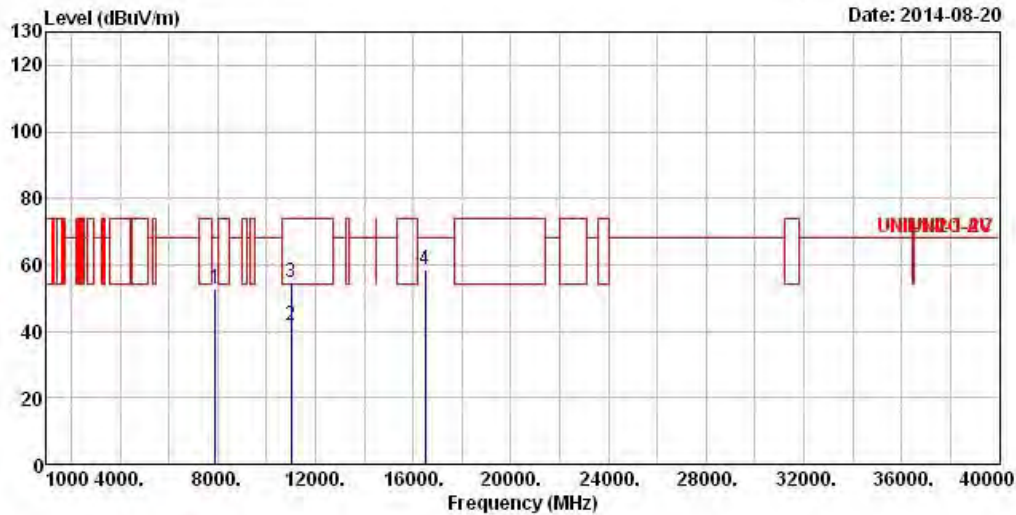

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7920.00	52.81	-15.39	68.20	40.43	37.02	8.14	32.78	Peak	---	---
2	11000.00	41.60	-12.40	54.00	25.94	38.80	9.23	32.37	Average	---	---
3	11000.00	54.68	-19.32	74.00	39.02	38.80	9.23	32.37	Peak	---	---
4	16500.00	58.69	-9.51	68.20	41.05	37.40	12.18	31.94	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5580
N _{TX}	1	Polarization	V

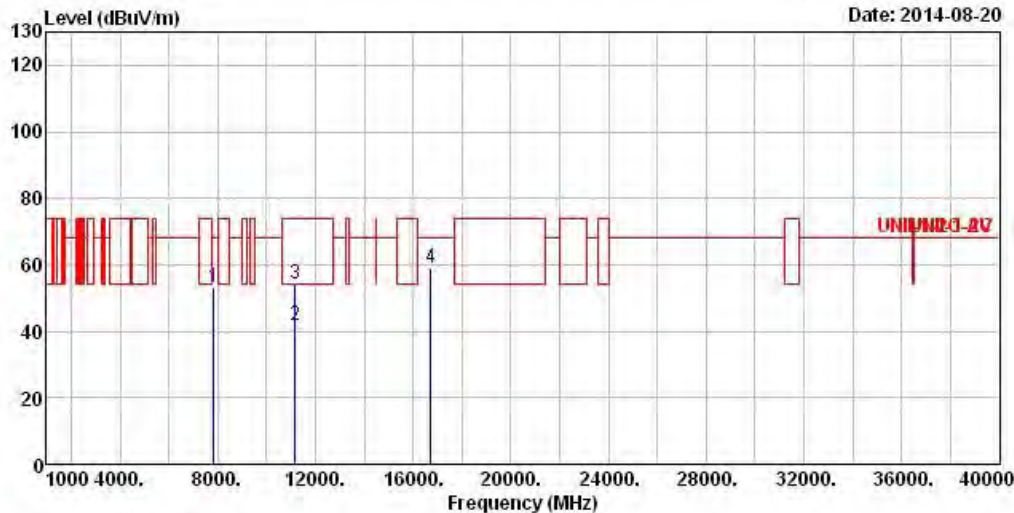

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7836.00	53.11	-15.09	68.20	40.95	36.93	8.00	32.77	Peak	---
2	11160.00	41.59	-12.41	54.00	25.44	38.97	9.54	32.36	Average	---
3	11160.00	54.29	-19.71	74.00	38.14	38.97	9.54	32.36	Peak	---
4	16740.00	58.87	-9.33	68.20	40.13	38.80	11.58	31.64	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5580
N_{TX}	1	Polarization	H

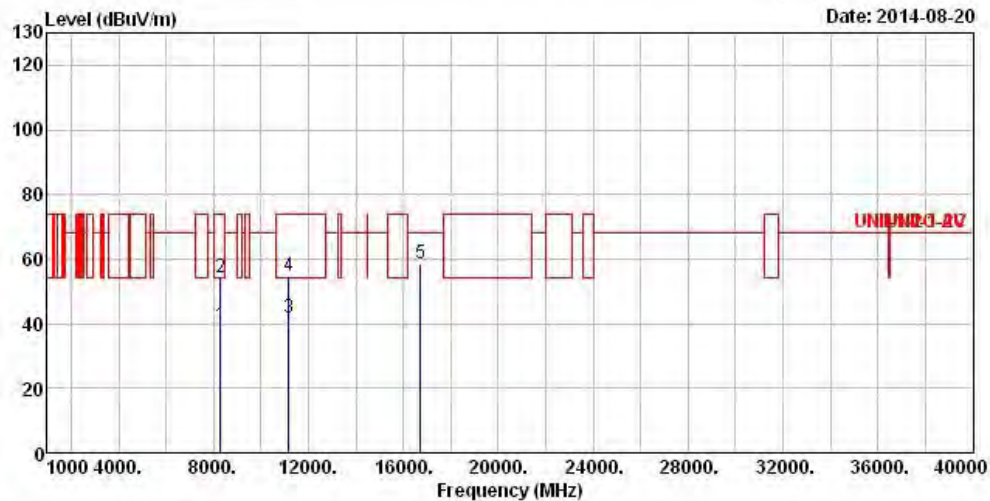

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8310.00	39.43	-14.57	54.00	26.41	37.72	8.11	32.81	Average	---	---
2	8310.00	54.04	-19.96	74.00	41.02	37.72	8.11	32.81	Peak	---	---
3	11160.00	41.55	-12.45	54.00	25.40	38.97	9.54	32.36	Average	---	---
4	11160.00	54.86	-19.14	74.00	38.71	38.97	9.54	32.36	Peak	---	---
5	16740.00	58.58	-9.62	68.20	39.84	38.80	11.58	31.64	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5700
N_{TX}	1	Polarization	V

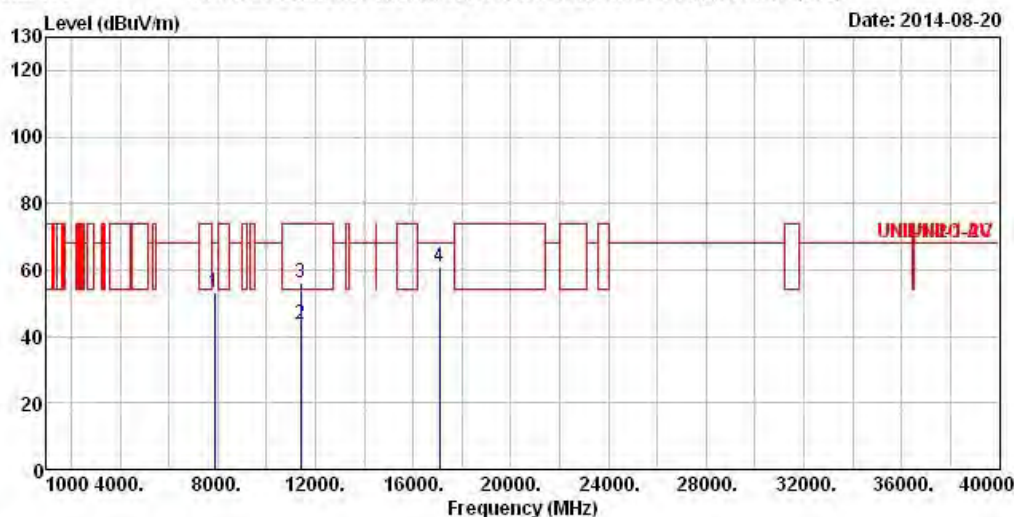

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7866.00	53.33	-14.87	68.20	41.07	36.97	8.07	32.78	Peak	---	---
2	11400.00	43.69	-10.31	54.00	26.92	39.20	9.92	32.35	Average	---	---
3	11400.00	56.18	-17.82	74.00	39.41	39.20	9.92	32.35	Peak	---	---
4	17100.00	60.70	-7.50	68.20	39.63	41.08	11.33	31.34	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5700
N_{TX}	1	Polarization	H

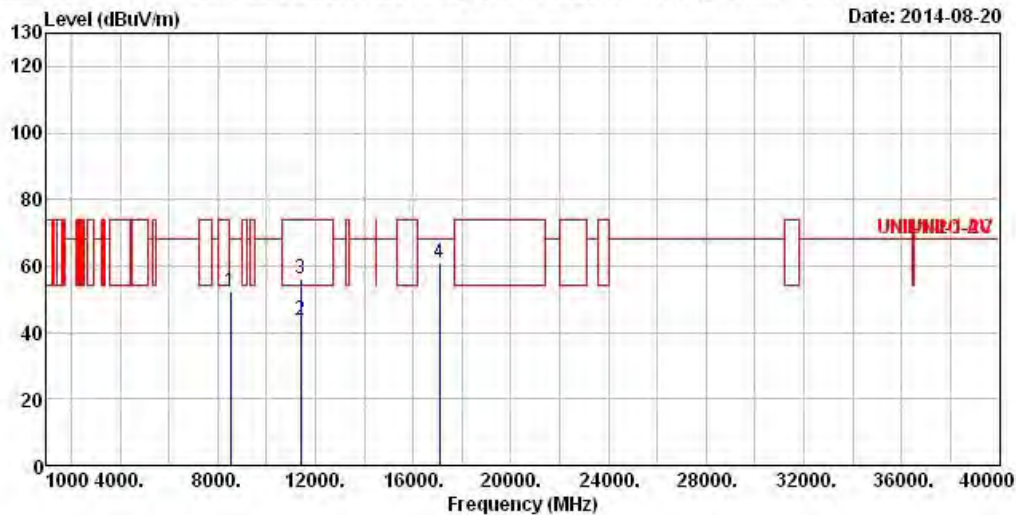

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8529.00	52.32	-15.88	68.20	39.04	38.11	7.99	32.82	Peak	---	---
2	11400.00	43.56	-10.44	54.00	26.79	39.20	9.92	32.35	Average	---	---
3	11400.00	55.89	-18.11	74.00	39.12	39.20	9.92	32.35	Peak	---	---
4	17100.00	60.89	-7.31	68.20	39.82	41.08	11.33	31.34	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5510
N_{TX}	1	Polarization	V

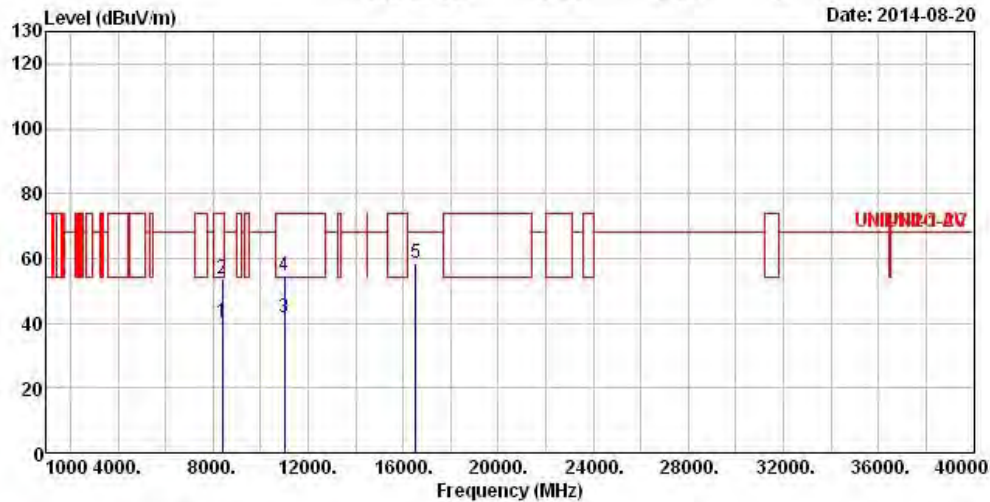

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8396.00	40.15	-13.85	54.00	27.02	37.89	8.05	32.81	Average	---	---
2	8396.00	53.85	-20.15	74.00	40.72	37.89	8.05	32.81	Peak	---	---
3	11020.00	41.52	-12.48	54.00	25.78	38.82	9.29	32.37	Average	---	---
4	11020.00	54.72	-19.28	74.00	38.98	38.82	9.29	32.37	Peak	---	---
5	16530.00	58.55	-9.65	68.20	40.77	37.60	12.09	31.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5510
N_{TX}	1	Polarization	H

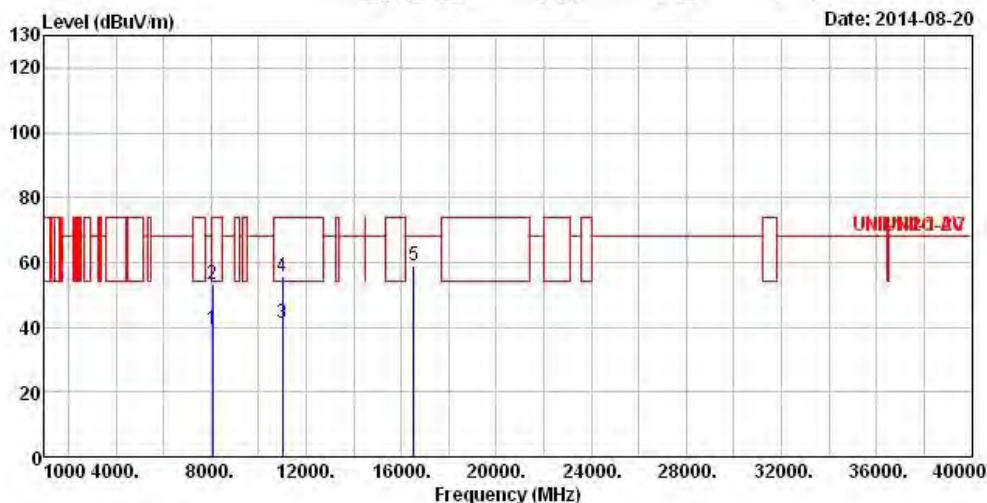

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8056.00	39.41	-14.59	54.00	26.77	37.20	8.24	32.80	Average	---	---
2	8056.00	53.08	-20.92	74.00	40.44	37.20	8.24	32.80	Peak	---	---
3	11020.00	41.49	-12.51	54.00	25.75	38.82	9.29	32.37	Average	---	---
4	11020.00	55.41	-18.59	74.00	39.67	38.82	9.29	32.37	Peak	---	---
5	16530.00	58.94	-9.26	68.20	41.16	37.60	12.09	31.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5550
N_{TX}	1	Polarization	V

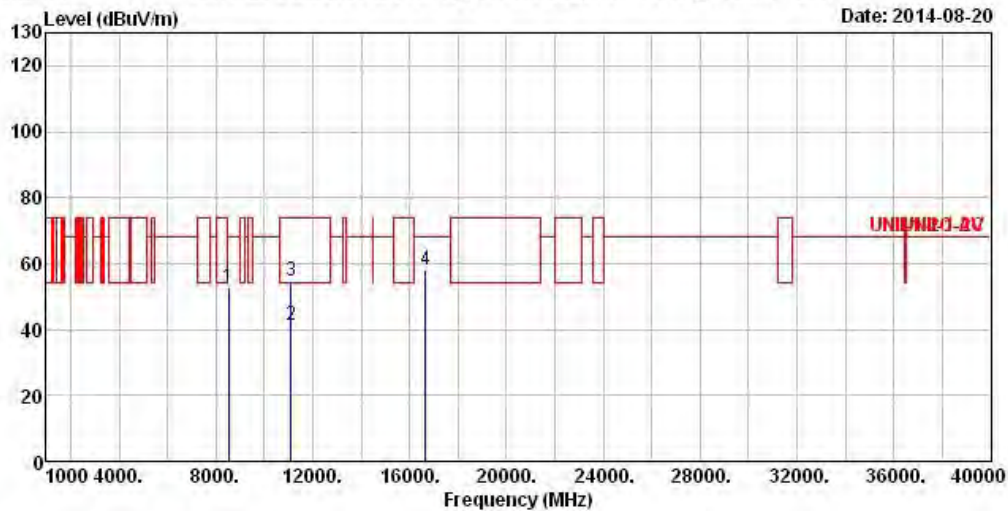

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8532.00	52.88	-15.32	68.20	39.60	38.11	7.99	32.82	Peak	---	---
2	11100.00	41.32	-12.68	54.00	25.36	38.90	9.42	32.36	Average	---	---
3	11100.00	54.70	-19.30	74.00	38.74	38.90	9.42	32.36	Peak	---	---
4	16650.00	57.93	-10.27	68.20	39.53	38.30	11.84	31.74	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5550
N_{TX}	1	Polarization	H

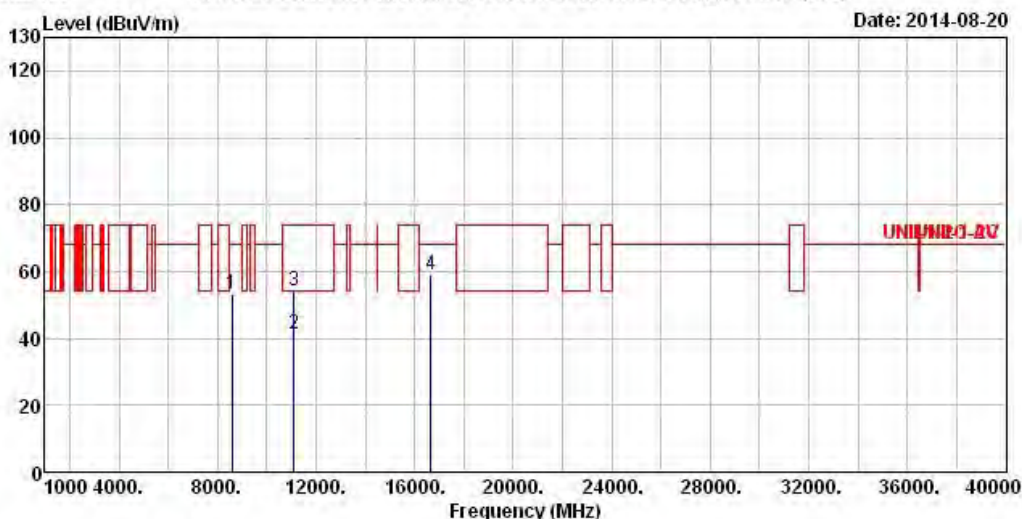

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8588.00	53.02	-15.18	68.20	39.78	38.13	7.95	32.84	Peak	---	---
2	11100.00	41.29	-12.71	54.00	25.33	38.90	9.42	32.36	Average	---	---
3	11100.00	54.26	-19.74	74.00	38.30	38.90	9.42	32.36	Peak	---	---
4	16650.00	58.86	-9.34	68.20	40.46	38.30	11.84	31.74	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5670
N_{TX}	1	Polarization	V

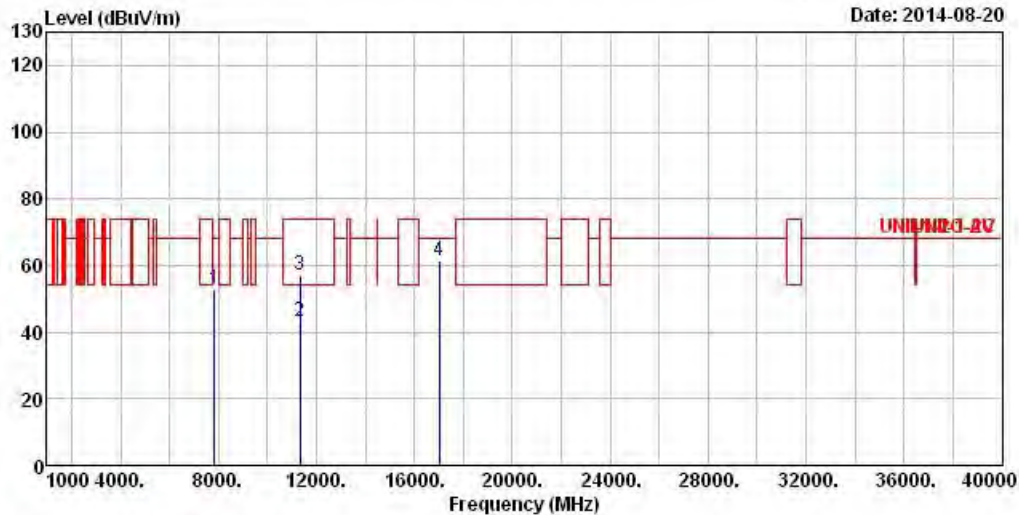

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7828.00	52.92	-15.28	68.20	40.76	36.93	8.00	32.77	Peak	---	---
2	11340.00	43.35	-10.65	54.00	26.78	39.13	9.79	32.35	Average	---	---
3	11340.00	56.92	-17.08	74.00	40.35	39.13	9.79	32.35	Peak	---	---
4	17010.00	61.31	-6.89	68.20	41.04	40.43	11.16	31.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5670
N_{TX}	1	Polarization	H

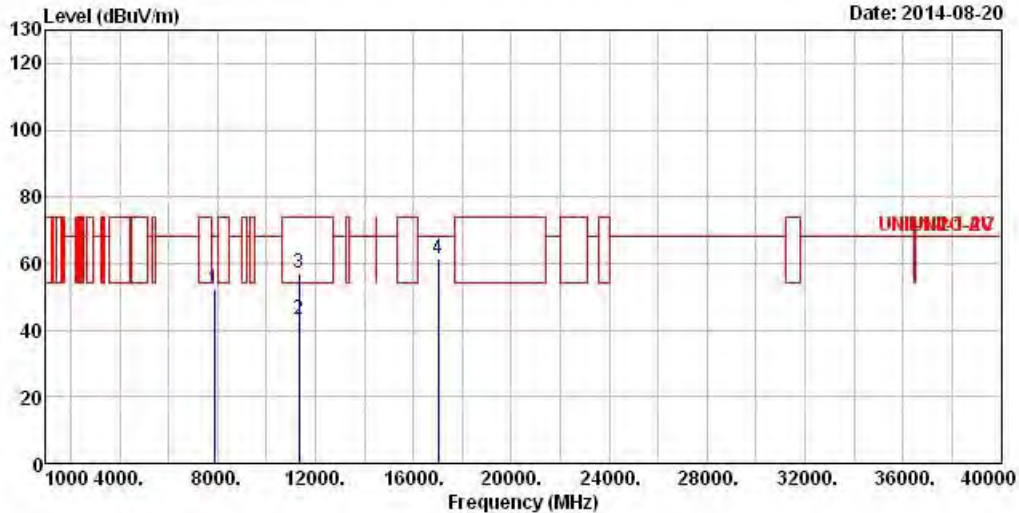

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7880.00	52.38	-15.82	68.20	40.11	36.98	8.07	32.78	Peak	---	---
2	11340.00	43.31	-10.69	54.00	26.74	39.13	9.79	32.35	Average	---	---
3	11340.00	57.02	-16.98	74.00	40.45	39.13	9.79	32.35	Peak	---	---
4	17010.00	61.32	-6.88	68.20	41.05	40.43	11.16	31.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5500
N_{TX}	1	Polarization	V

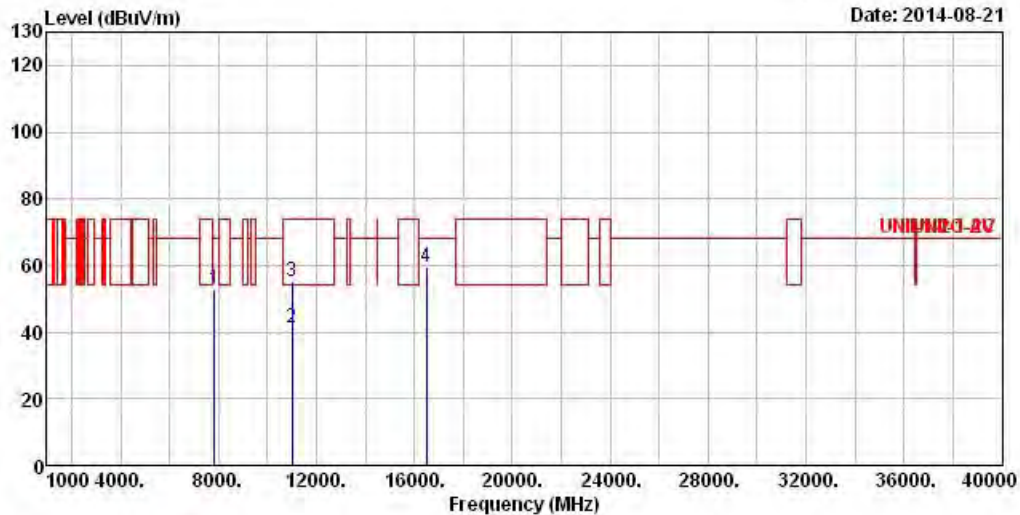

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7836.00	52.80	-15.40	68.20	40.64	36.93	8.00	32.77	Peak	---	---
2	11000.00	41.48	-12.52	54.00	25.82	38.80	9.23	32.37	Average	---	---
3	11000.00	55.20	-18.80	74.00	39.54	38.80	9.23	32.37	Peak	---	---
4	16500.00	59.26	-8.94	68.20	41.62	37.40	12.18	31.94	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5500
N_{TX}	1	Polarization	H

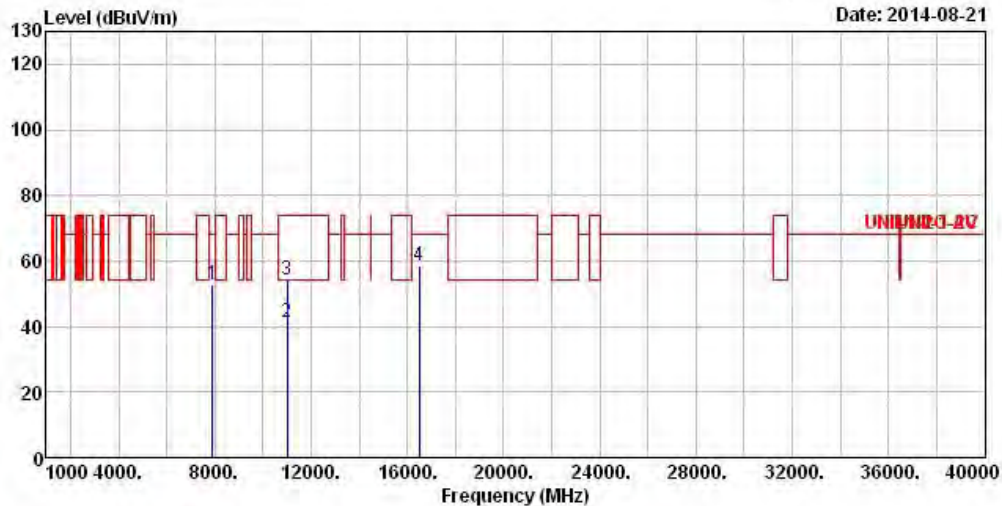

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7892.00	52.64	-15.56	68.20	40.30	36.98	8.14	32.78	Peak	---
2	11000.00	41.49	-12.51	54.00	25.83	38.80	9.23	32.37	Average	---
3	11000.00	54.26	-19.74	74.00	38.60	38.80	9.23	32.37	Peak	---
4	16500.00	58.36	-9.84	68.20	40.72	37.40	12.18	31.94	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5580
N_{TX}	1	Polarization	V

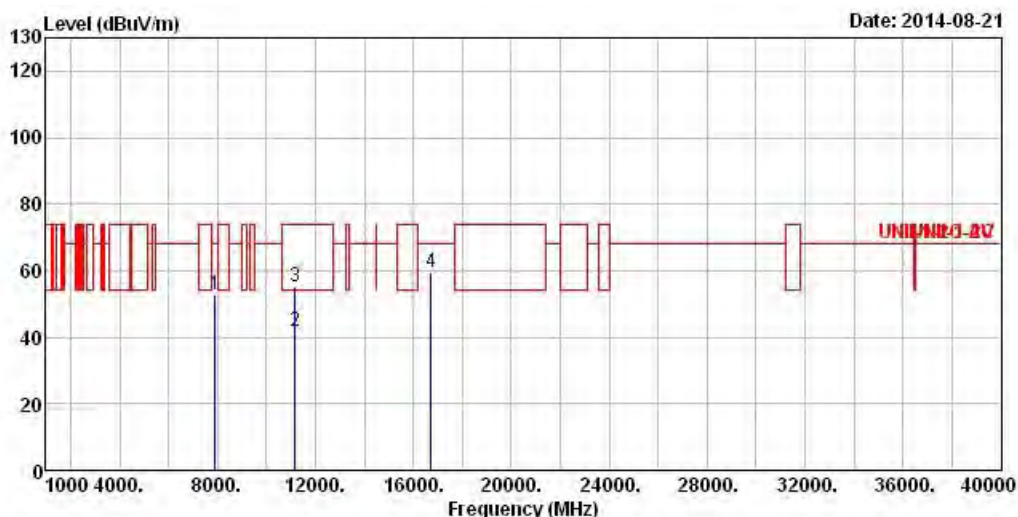

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7892.00	52.87	-15.33	68.20	40.53	36.98	8.14	32.78	Peak	---
2	11160.00	41.69	-12.31	54.00	25.54	38.97	9.54	32.36	Average	---
3	11160.00	55.08	-18.92	74.00	38.93	38.97	9.54	32.36	Peak	---
4	16740.00	59.32	-8.88	68.20	40.58	38.80	11.58	31.64	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5580
N_{TX}	1	Polarization	H

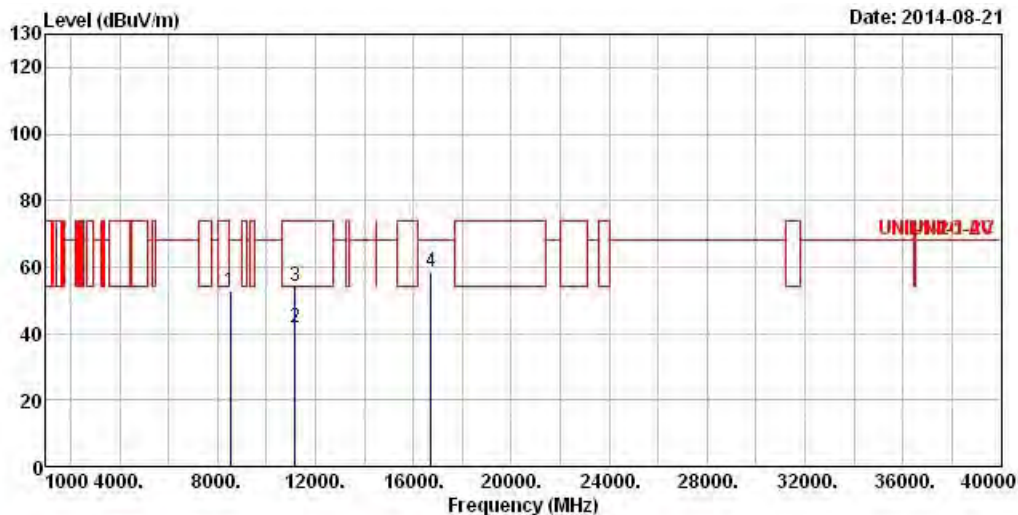

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8524.00	52.59	-15.61	68.20	39.31	38.11	7.99	32.82	Peak	---
2	11160.00	41.76	-12.24	54.00	25.61	38.97	9.54	32.36	Average	---
3	11160.00	54.11	-19.89	74.00	37.96	38.97	9.54	32.36	Peak	---
4	16740.00	58.60	-9.60	68.20	39.86	38.80	11.58	31.64	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5700
N_{TX}	1	Polarization	V

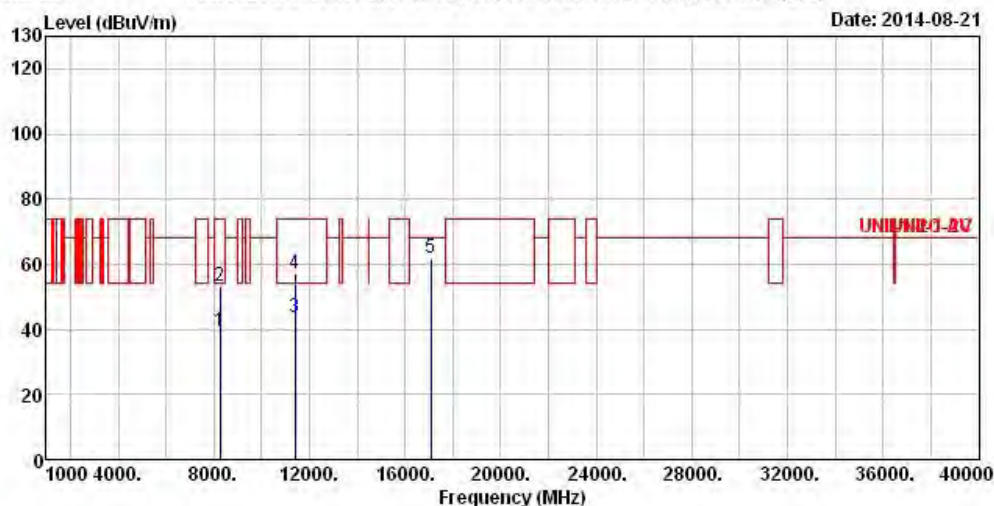

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8252.00	39.51	-14.49	54.00	26.56	37.62	8.13	32.80	Average	---	---
2	8252.00	53.38	-20.62	74.00	40.43	37.62	8.13	32.80	Peak	---	---
3	11400.00	43.64	-10.36	54.00	26.87	39.20	9.92	32.35	Average	---	---
4	11400.00	56.88	-17.12	74.00	40.11	39.20	9.92	32.35	Peak	---	---
5	17100.00	61.86	-6.34	68.20	40.79	41.08	11.33	31.34	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5700
N_{TX}	1	Polarization	H

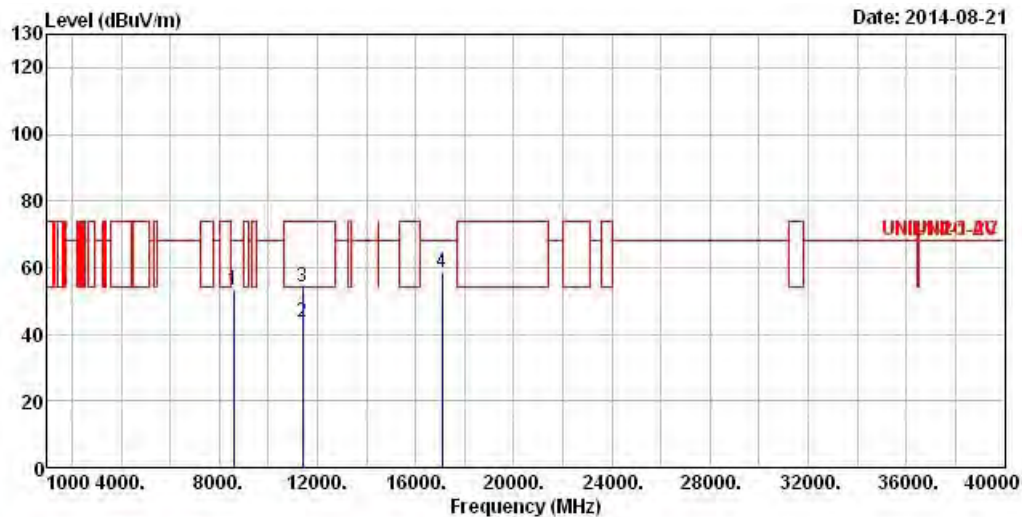

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg
1	8580.00	53.28	-14.92	68.20	40.02	38.13	7.97	32.84 Peak	---	---
2	11400.00	43.67	-10.33	54.00	26.90	39.20	9.92	32.35 Average	---	---
3	11400.00	54.11	-19.89	74.00	37.34	39.20	9.92	32.35 Peak	---	---
4	17100.00	58.60	-9.60	68.20	37.53	41.08	11.33	31.34 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5510
N_{TX}	1	Polarization	V

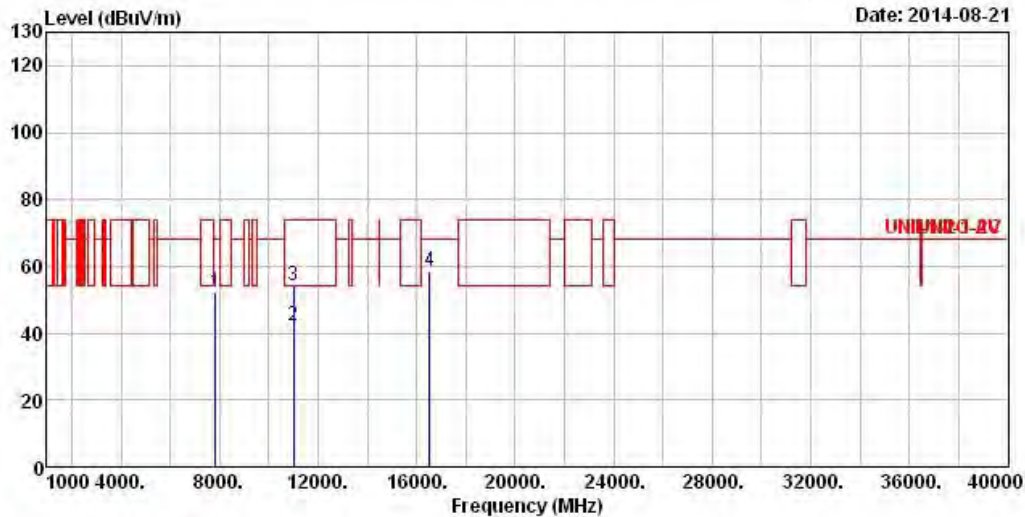

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7845.00	52.27	-15.93	68.20	40.02	36.95	8.07	32.77	Peak	---	---
2	11020.00	42.20	-11.80	54.00	26.46	38.82	9.29	32.37	Average	---	---
3	11020.00	54.35	-19.65	74.00	38.61	38.82	9.29	32.37	Peak	---	---
4	16530.00	58.70	-9.50	68.20	40.92	37.60	12.09	31.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5510
N_{TX}	1	Polarization	H

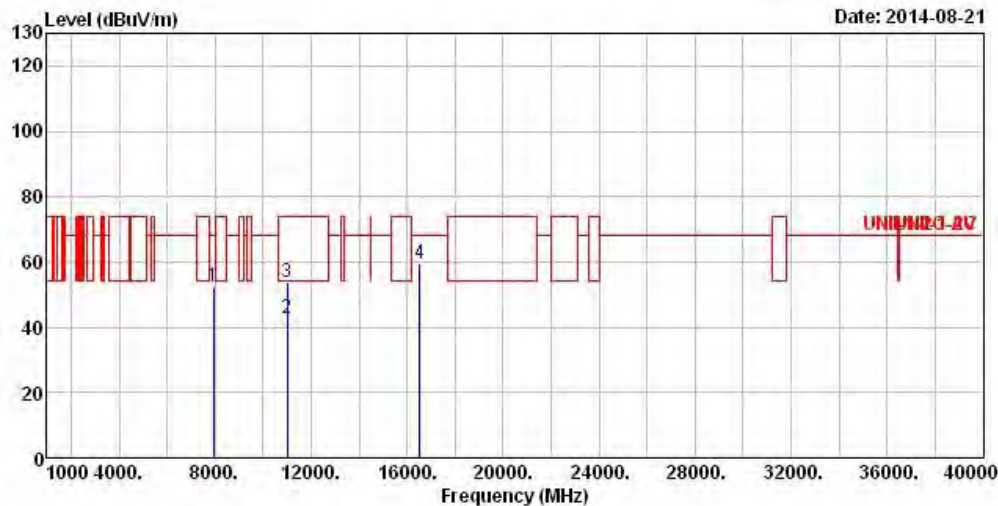

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7926.00	52.20	-16.00	68.20	39.76	37.02	8.21	32.79	Peak	---	---
2	11020.00	42.51	-11.49	54.00	26.77	38.82	9.29	32.37	Average	---	---
3	11020.00	53.92	-20.08	74.00	38.18	38.82	9.29	32.37	Peak	---	---
4	16530.00	59.51	-8.69	68.20	41.73	37.60	12.09	31.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5550
N_{TX}	1	Polarization	V

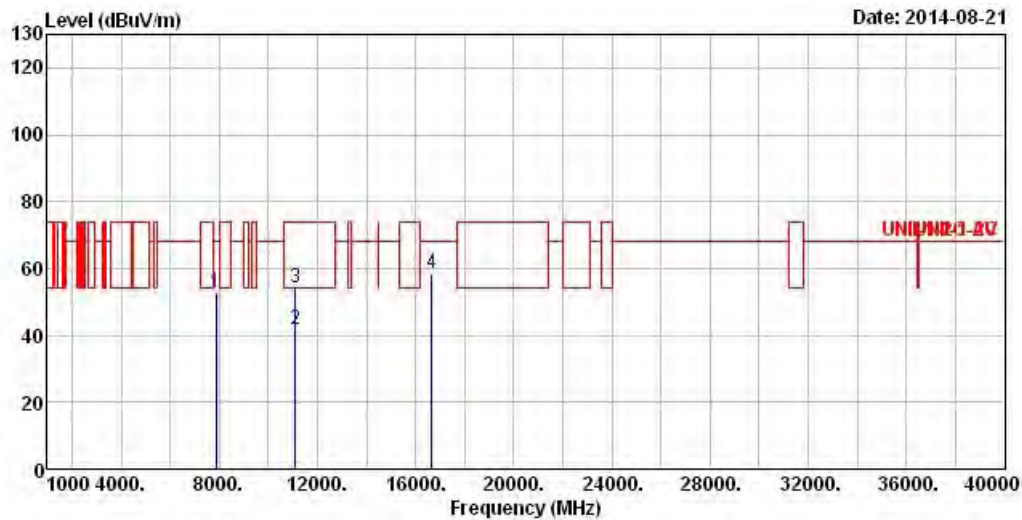


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7884.00	52.91	-15.29	68.20	40.57	36.98	8.14	32.78	Peak	---
2	11100.00	41.97	-12.03	54.00	26.01	38.90	9.42	32.36	Average	---
3	11100.00	54.29	-19.71	74.00	38.33	38.90	9.42	32.36	Peak	---
4	16650.00	58.50	-9.70	68.20	40.10	38.30	11.84	31.74	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5550
N_{TX}	1	Polarization	H

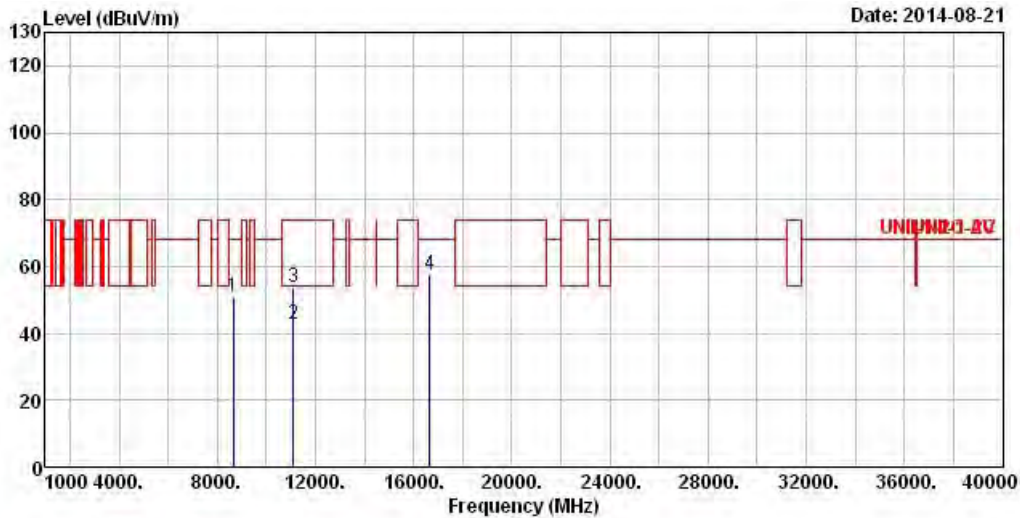


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8652.00	50.81	-17.39	68.20	37.58	38.16	7.93	32.86	Peak	---	---
2	11100.00	42.93	-11.07	54.00	26.97	38.90	9.42	32.36	Average	---	---
3	11100.00	53.81	-20.19	74.00	37.85	38.90	9.42	32.36	Peak	---	---
4	16650.00	57.78	-10.42	68.20	39.38	38.30	11.84	31.74	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5670
N_{TX}	1	Polarization	V

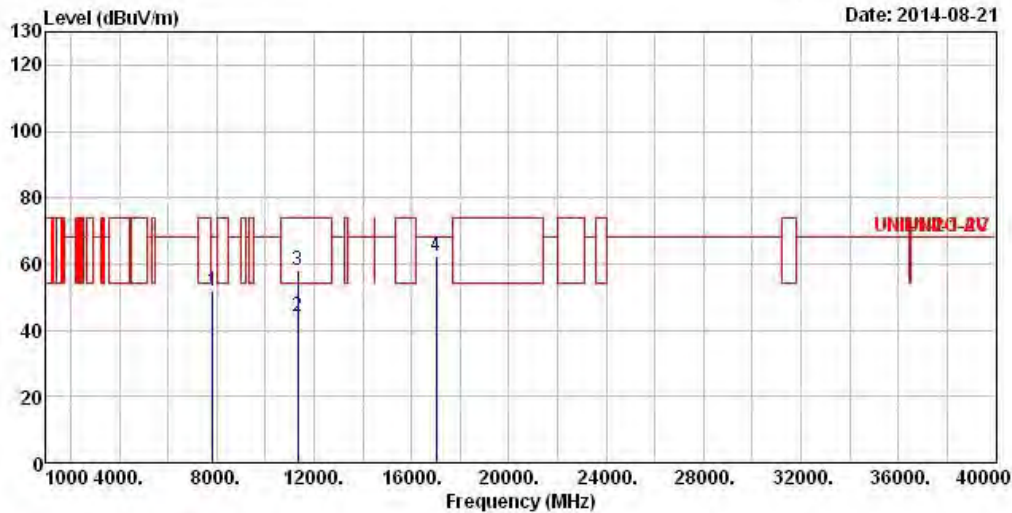

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7845.00	51.95	-16.25	68.20	39.70	36.95	8.07	32.77	Peak	---
2	11340.00	43.99	-10.01	54.00	27.42	39.13	9.79	32.35	Average	---
3	11340.00	57.90	-16.10	74.00	41.33	39.13	9.79	32.35	Peak	---
4	17010.00	62.17	-6.03	68.20	41.90	40.43	11.16	31.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5670
N_{TX}	1	Polarization	H

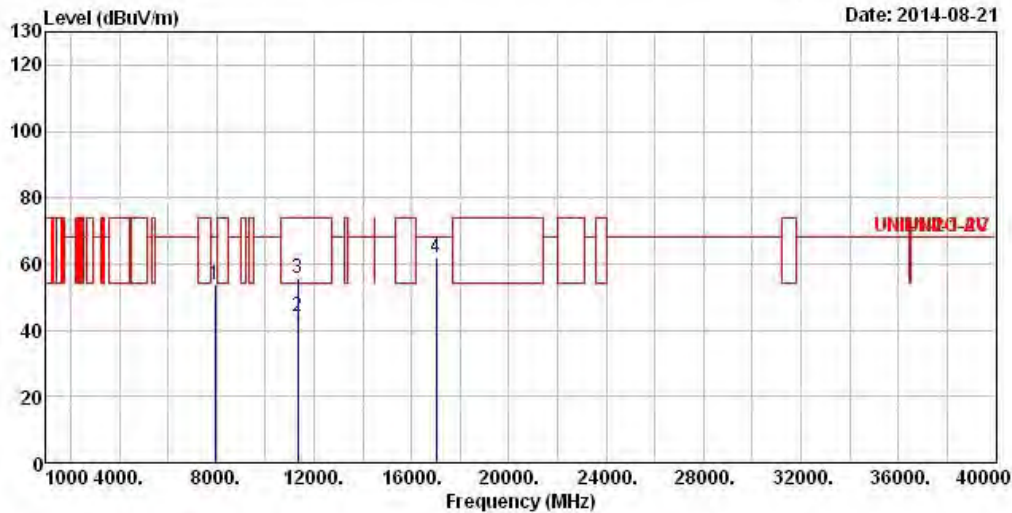

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	7926.00	53.72	-14.48	68.20	41.28	37.02	8.21	32.79 Peak	---	---
2	11340.00	43.90	-10.10	54.00	27.33	39.13	9.79	32.35 Average	---	---
3	11340.00	55.80	-18.20	74.00	39.23	39.13	9.79	32.35 Peak	---	---
4	17010.00	61.81	-6.39	68.20	41.54	40.43	11.16	31.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5530
N_{TX}	1	Polarization	V

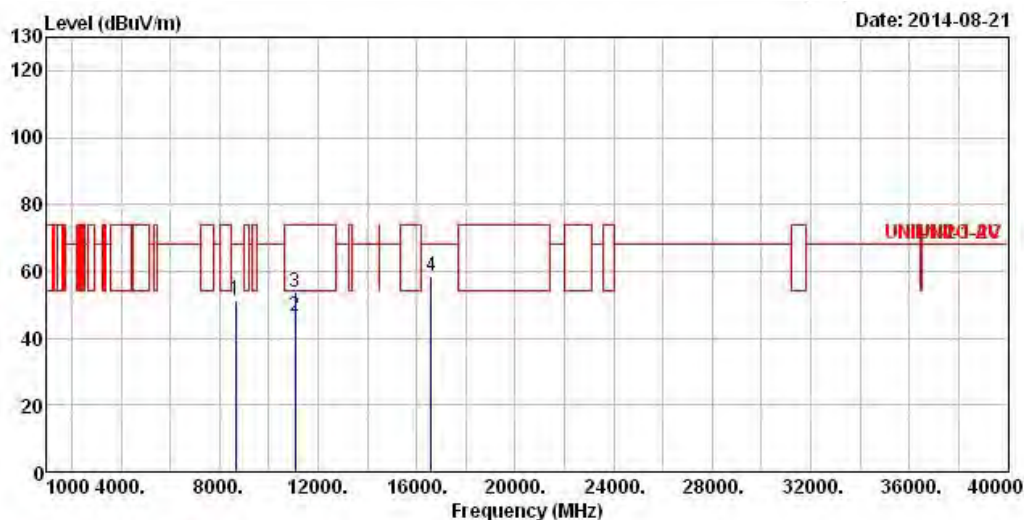

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8652.00	51.20	-17.00	68.20	37.97	38.16	7.93	32.86	Peak	---	---
2	11060.00	46.40	-7.60	54.00	30.55	38.87	9.35	32.37	Average	---	---
3	11060.00	53.93	-20.07	74.00	38.08	38.87	9.35	32.37	Peak	---	---
4	16590.00	58.39	-9.81	68.20	40.41	37.90	11.92	31.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5530
N_{TX}	1	Polarization	H

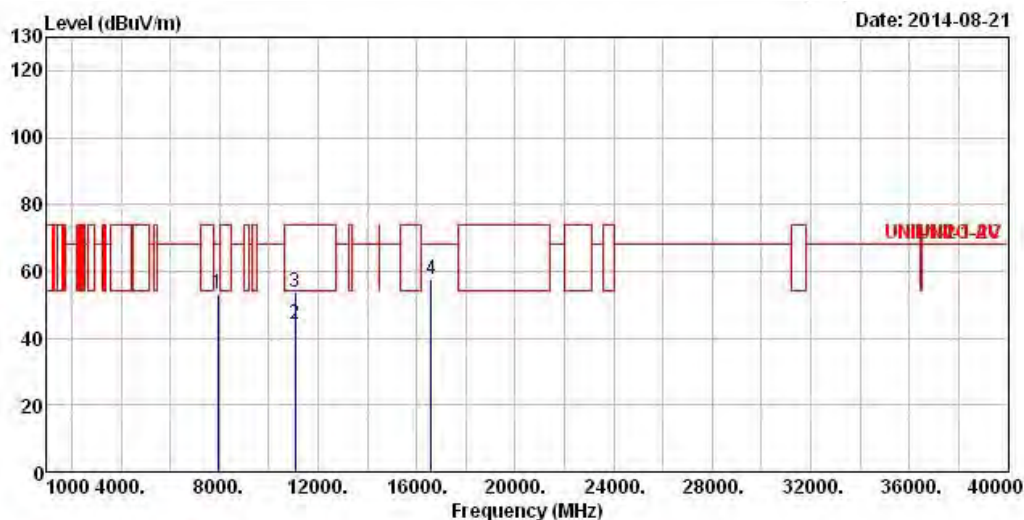

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7926.00	53.35	-14.85	68.20	40.91	37.02	8.21	32.79	Peak	---	---
2	11060.00	44.09	-9.91	54.00	28.24	38.87	9.35	32.37	Average	---	---
3	11060.00	53.69	-20.31	74.00	37.84	38.87	9.35	32.37	Peak	---	---
4	16590.00	57.56	-10.64	68.20	39.58	37.90	11.92	31.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

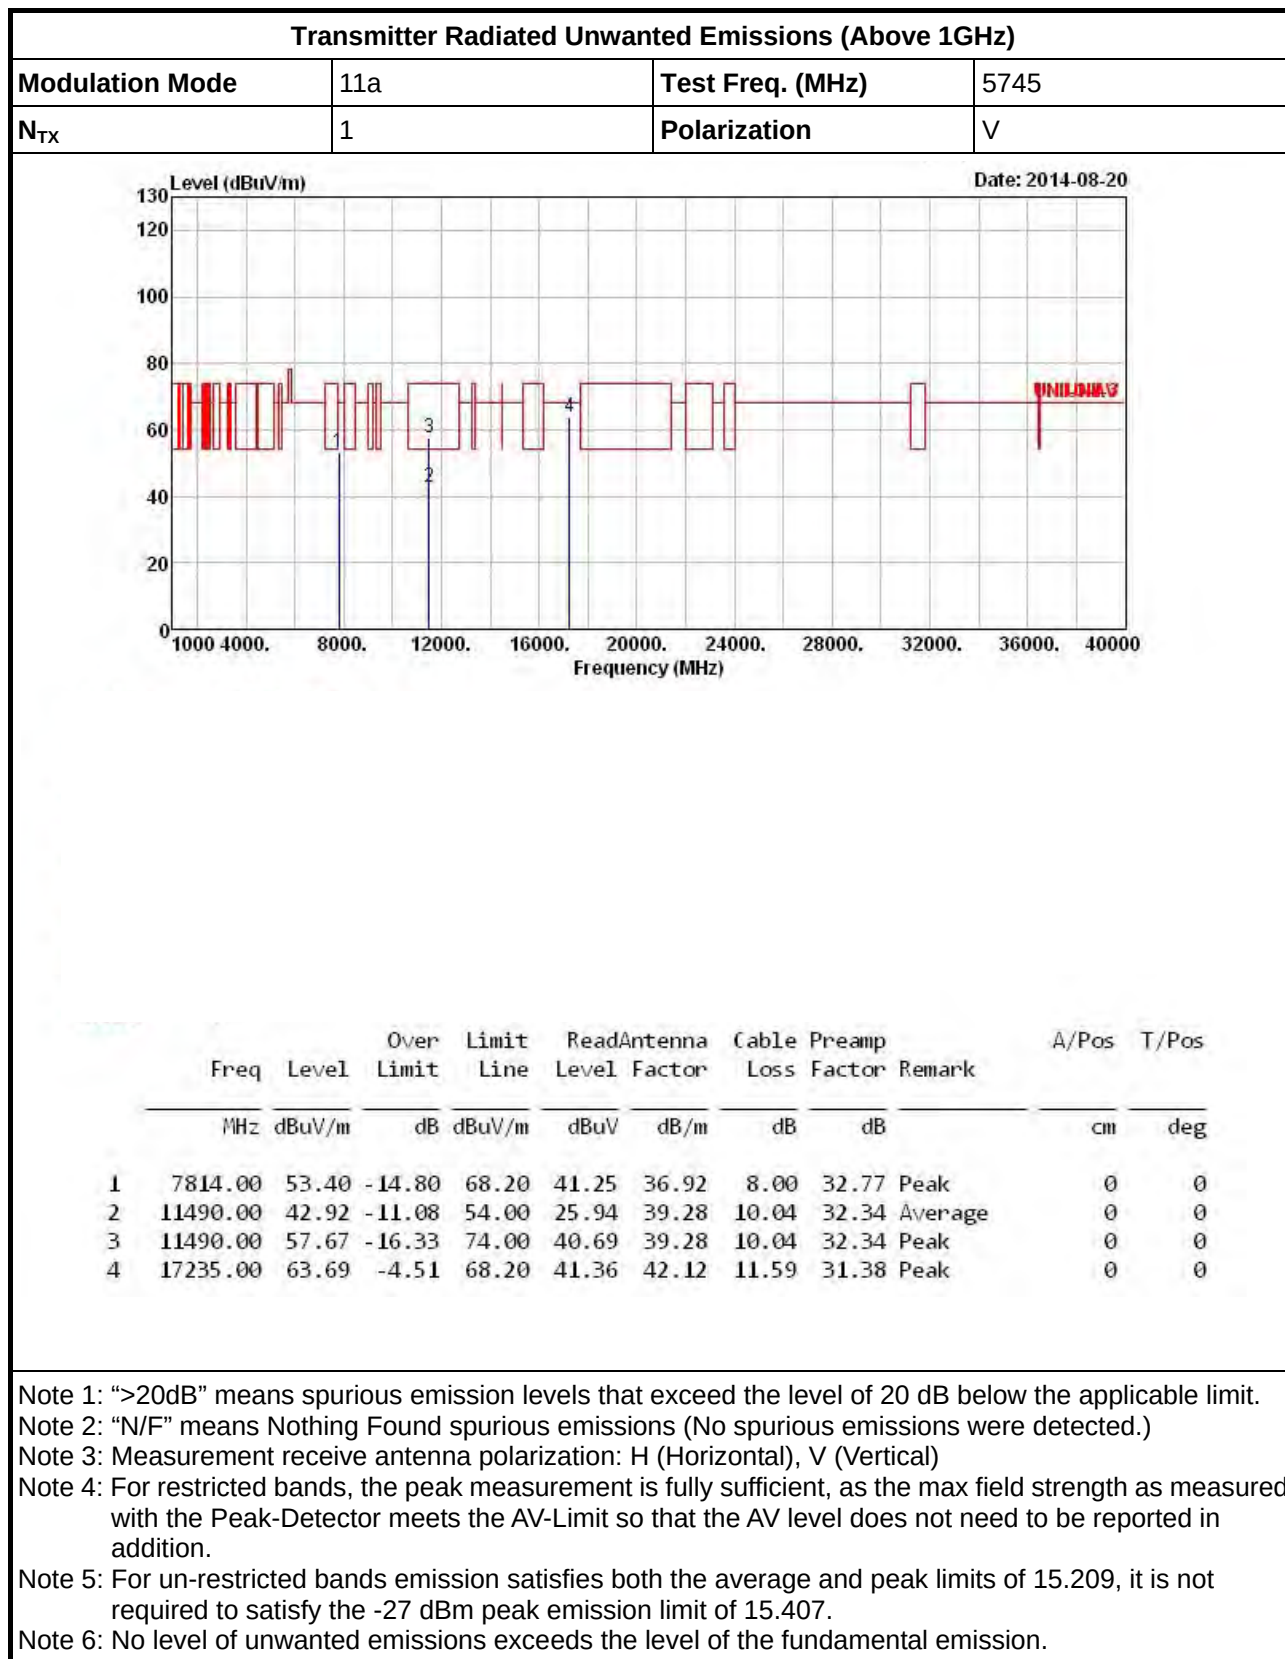3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

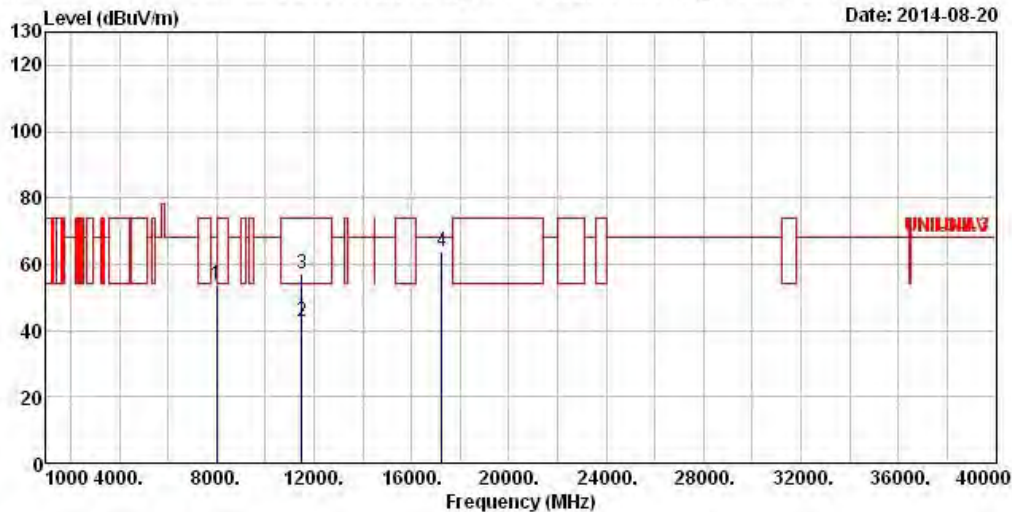

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8011.00	53.82	-14.38	68.20	41.26	37.10	8.26	32.80	Peak	0	0
2	11490.00	42.75	-11.25	54.00	25.77	39.28	10.04	32.34	Average	0	0
3	11490.00	57.24	-16.76	74.00	40.26	39.28	10.04	32.34	Peak	0	0
4	17235.00	63.71	-4.49	68.20	41.38	42.12	11.59	31.38	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

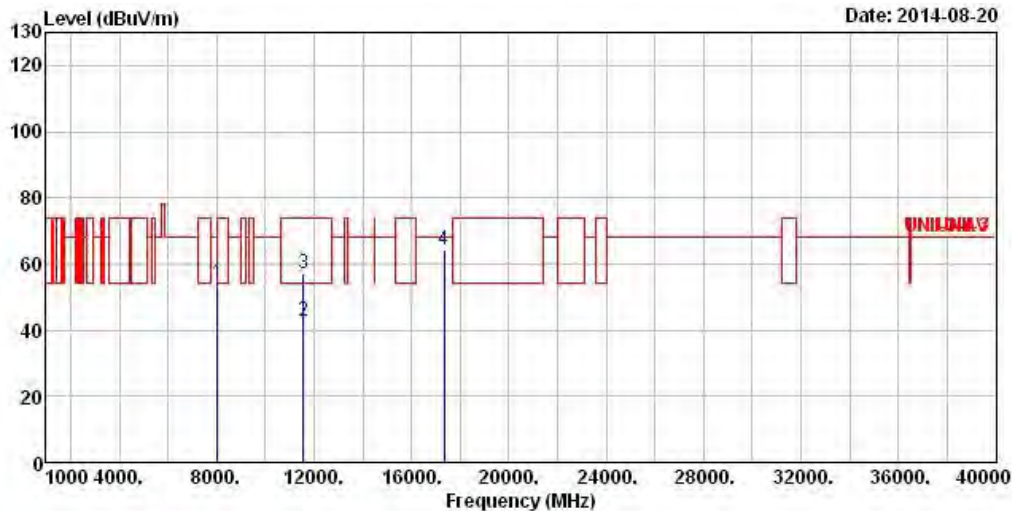

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8021.00	54.03	-14.17	68.20	41.44	37.13	8.26	32.80	Peak	0	0
2	11570.00	42.64	-11.36	54.00	25.61	39.34	10.04	32.35	Average	0	0
3	11570.00	57.14	-16.86	74.00	40.11	39.34	10.04	32.35	Peak	0	0
4	17355.00	64.16	-4.04	68.20	40.69	43.03	11.85	31.41	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

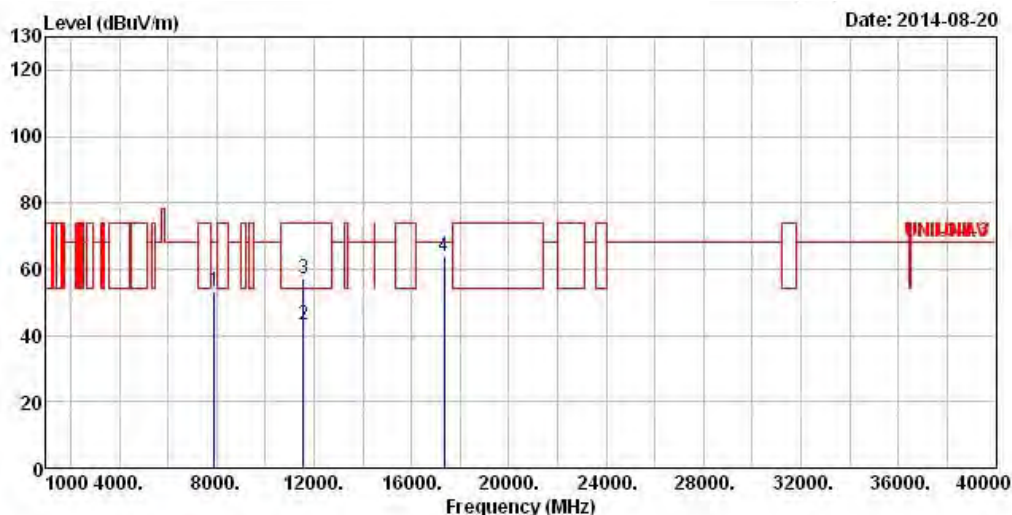

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7891.00	53.37	-14.83	68.20	41.03	36.98	8.14	32.78	Peak	0
2	11570.00	43.04	-10.96	54.00	26.01	39.34	10.04	32.35	Average	0
3	11570.00	57.29	-16.71	74.00	40.26	39.34	10.04	32.35	Peak	0
4	17355.00	63.57	-4.63	68.20	40.10	43.03	11.85	31.41	Peak	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

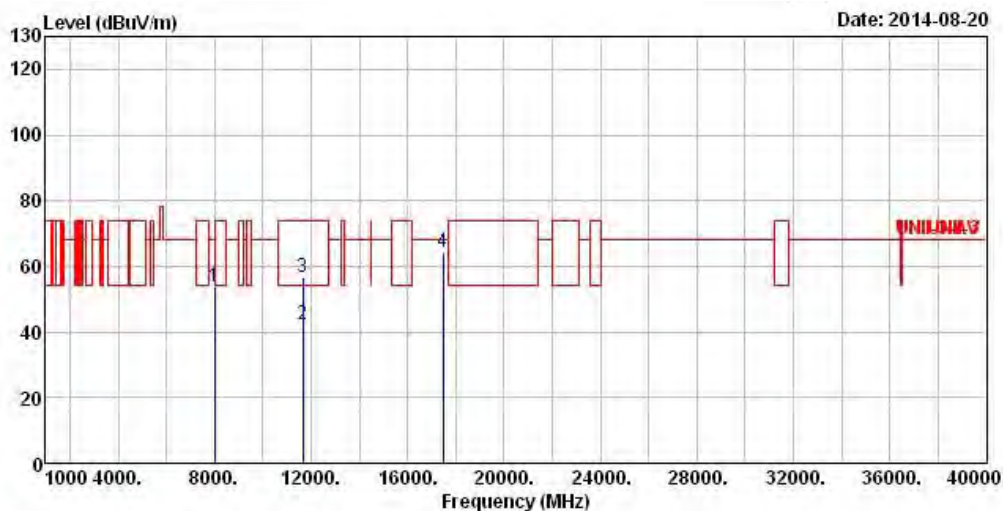

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8010.00	53.81	-14.39	68.20	41.25	37.10	8.26	32.80	Peak	0	0
2	11650.00	42.12	-11.88	54.00	25.07	39.38	10.03	32.36	Average	0	0
3	11650.00	56.67	-17.33	74.00	39.62	39.38	10.03	32.36	Peak	0	0
4	17475.00	64.18	-4.02	68.20	39.58	43.94	12.11	31.45	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

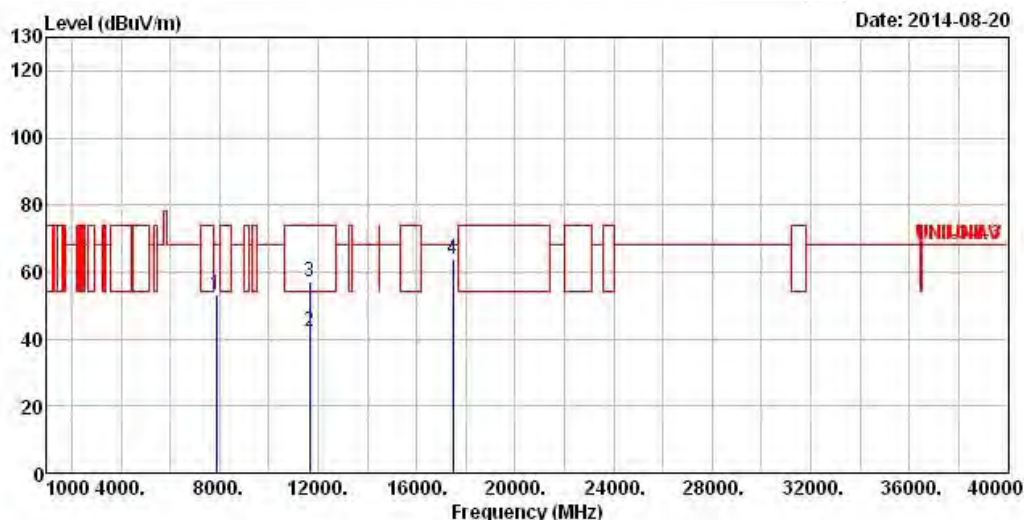

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7858.00	53.26	-14.94	68.20	41.02	36.95	8.07	32.78	Peak	0	0
2	11650.00	42.12	-11.88	54.00	25.07	39.38	10.03	32.36	Average	0	0
3	11650.00	57.07	-16.93	74.00	40.02	39.38	10.03	32.36	Peak	0	0
4	17475.00	63.66	-4.54	68.20	39.06	43.94	12.11	31.45	Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

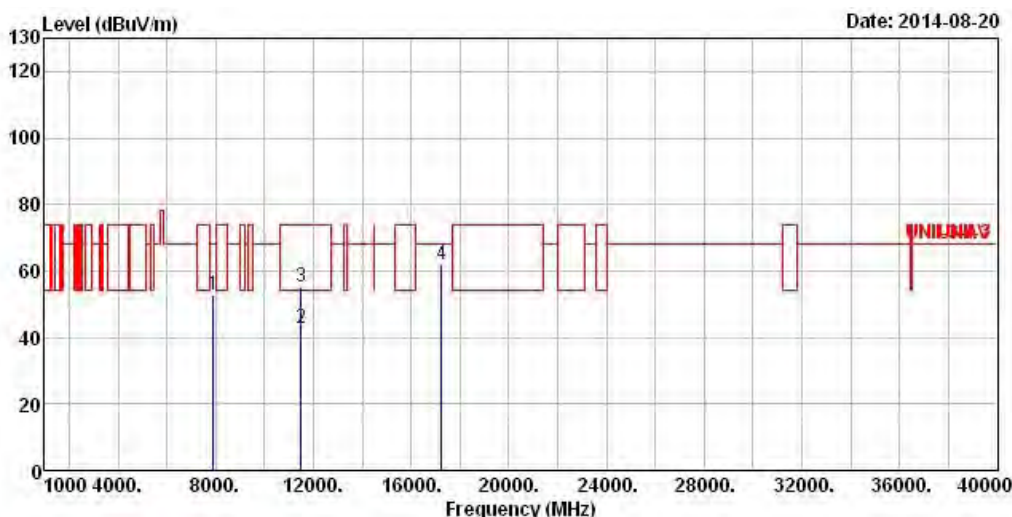

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7890.00	52.54	-15.66	68.20	40.20	36.98	8.14	32.78	Peak	---	---
2	11490.00	42.66	-11.34	54.00	25.68	39.28	10.04	32.34	Average	---	---
3	11490.00	55.11	-18.89	74.00	38.13	39.28	10.04	32.34	Peak	---	---
4	17235.00	61.65	-6.55	68.20	39.32	42.12	11.59	31.38	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

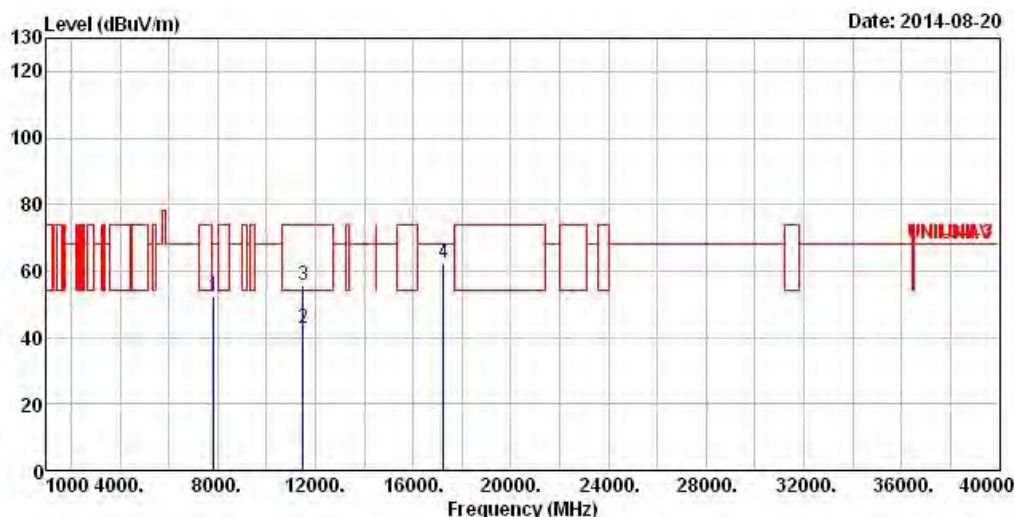

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7836.00	52.51	-15.69	68.20	40.35	36.93	8.00	32.77	Peak	---
2	11490.00	42.81	-11.19	54.00	25.83	39.28	10.04	32.34	Average	---
3	11490.00	55.44	-18.56	74.00	38.46	39.28	10.04	32.34	Peak	---
4	17235.00	62.28	-5.92	68.20	39.95	42.12	11.59	31.38	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

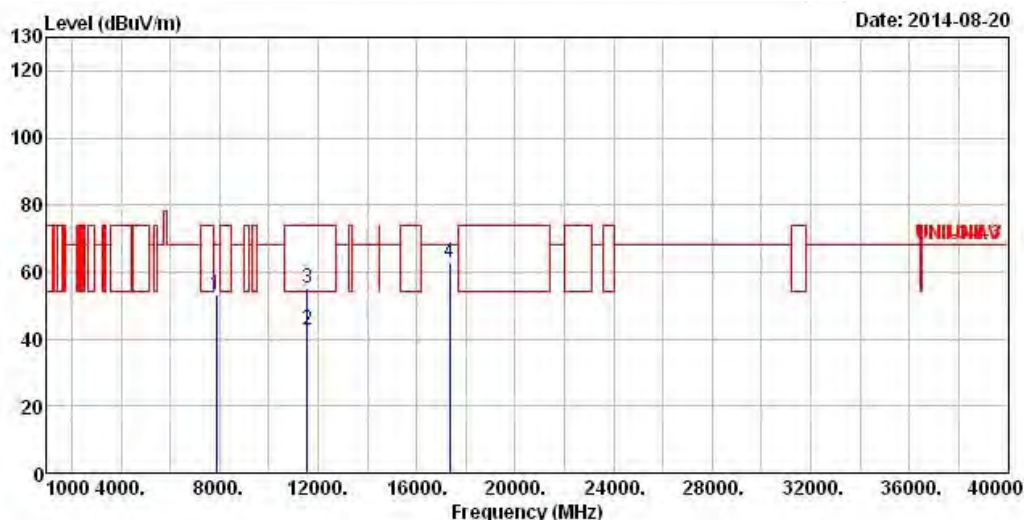

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7860.00	53.02	-15.18	68.20	40.76	36.97	8.07	32.78	Peak	---	---
2	11570.00	42.63	-11.37	54.00	25.60	39.34	10.04	32.35	Average	---	---
3	11570.00	55.03	-18.97	74.00	38.00	39.34	10.04	32.35	Peak	---	---
4	17355.00	62.62	-5.58	68.20	39.15	43.03	11.85	31.41	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

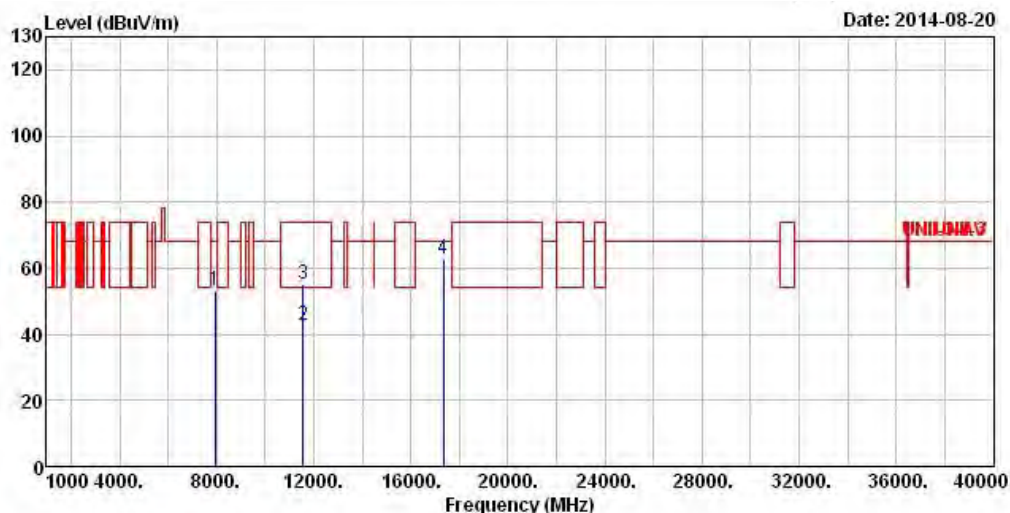

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7926.00	53.22	-14.98	68.20	40.78	37.02	8.21	32.79	Peak	---
2	11570.00	42.67	-11.33	54.00	25.64	39.34	10.04	32.35	Average	---
3	11570.00	55.14	-18.86	74.00	38.11	39.34	10.04	32.35	Peak	---
4	17355.00	62.62	-5.58	68.20	39.15	43.03	11.85	31.41	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

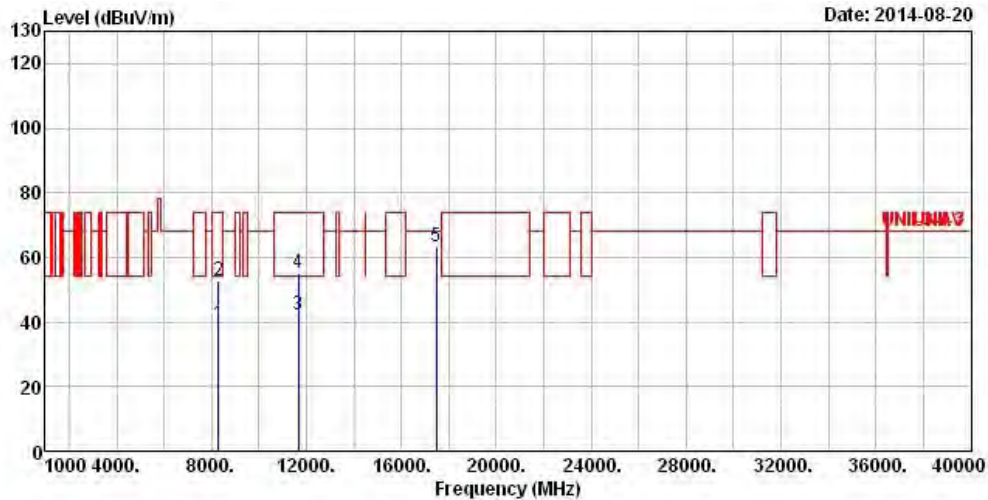

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8298.00	39.31	-14.69	54.00	26.32	37.69	8.11	32.81	Average	---	---
2	8298.00	52.69	-21.31	74.00	39.70	37.69	8.11	32.81	Peak	---	---
3	11650.00	42.18	-11.82	54.00	25.13	39.38	10.03	32.36	Average	---	---
4	11650.00	55.19	-18.81	74.00	38.14	39.38	10.03	32.36	Peak	---	---
5	17475.00	63.14	-5.06	68.20	38.54	43.94	12.11	31.45	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

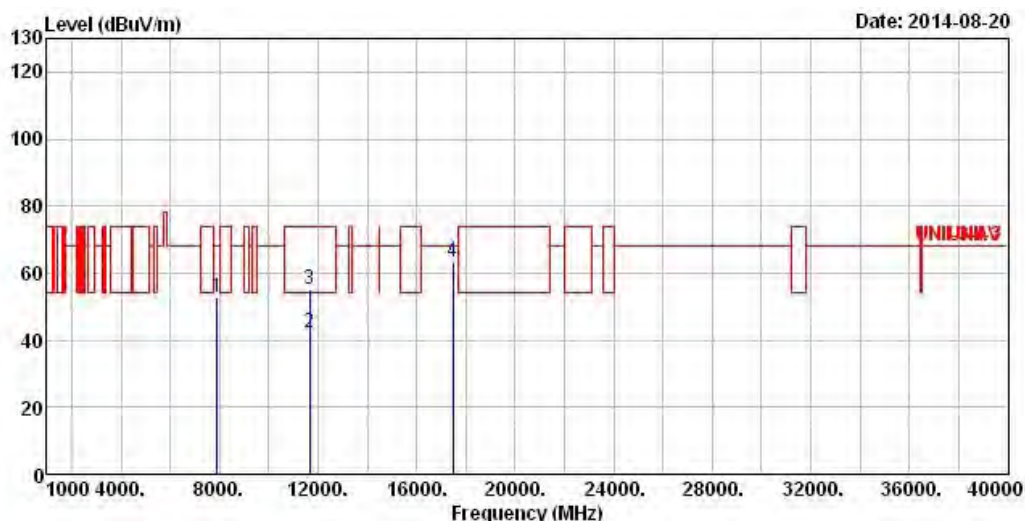

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7896.00	52.60	-15.60	68.20	40.24	37.00	8.14	32.78	Peak	---	---
2	11650.00	42.02	-11.98	54.00	24.97	39.38	10.03	32.36	Average	---	---
3	11650.00	55.10	-18.90	74.00	38.05	39.38	10.03	32.36	Peak	---	---
4	17475.00	63.38	-4.82	68.20	38.78	43.94	12.11	31.45	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	V

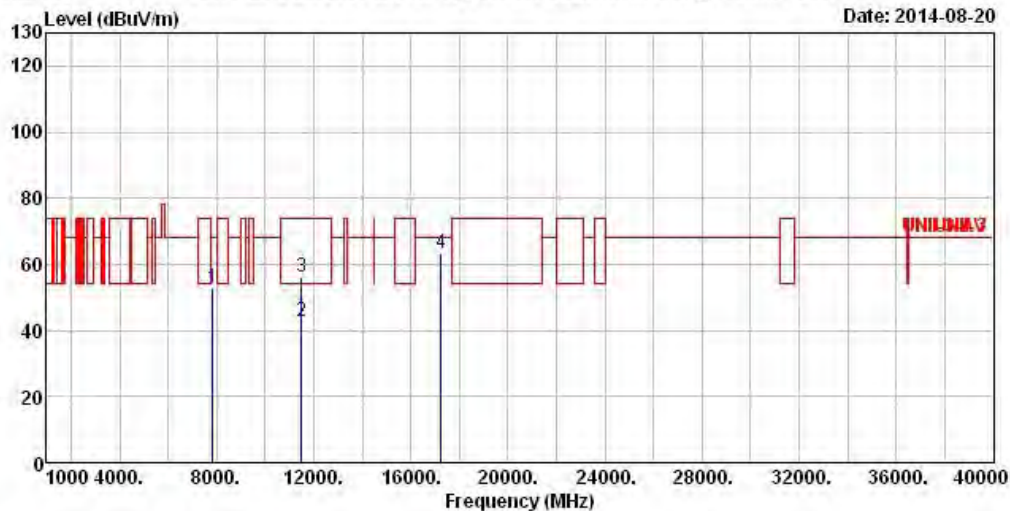

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7836.00	52.97	-15.23	68.20	40.81	36.93	8.00	32.77	Peak	---
2	11510.00	42.78	-11.22	54.00	25.78	39.30	10.04	32.34	Average	---
3	11510.00	56.23	-17.77	74.00	39.23	39.30	10.04	32.34	Peak	---
4	17265.00	63.55	-4.65	68.20	40.88	42.38	11.68	31.39	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	H

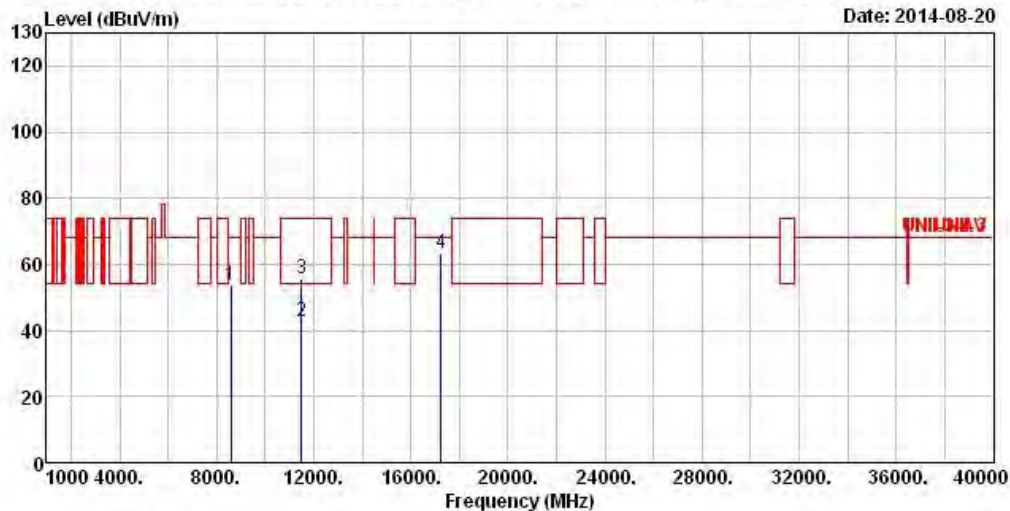

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8600.00	53.87	-14.33	68.20	40.62	38.14	7.95	32.84	Peak	---
2	11510.00	42.69	-11.31	54.00	25.69	39.30	10.04	32.34	Average	---
3	11510.00	55.85	-18.15	74.00	38.85	39.30	10.04	32.34	Peak	---
4	17265.00	63.27	-4.93	68.20	40.60	42.38	11.68	31.39	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	V

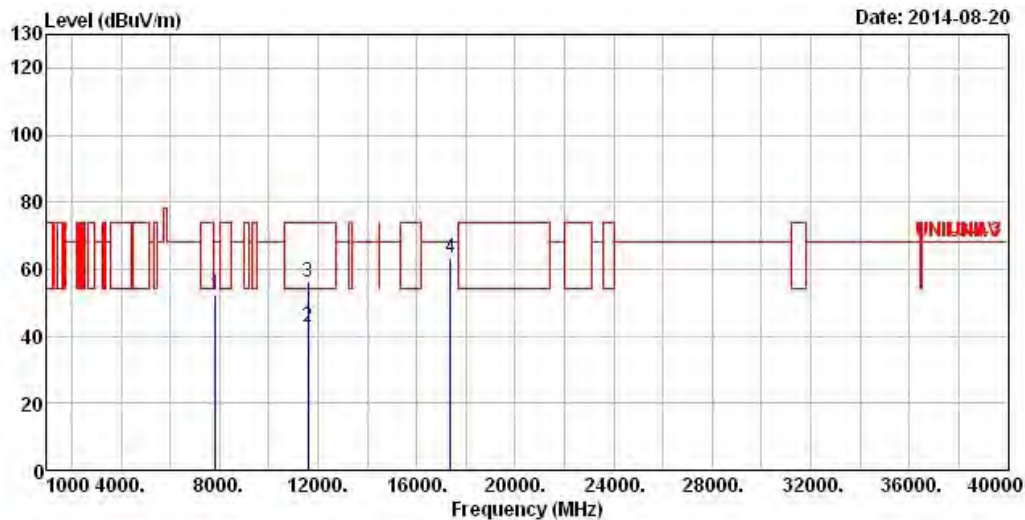

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7840.00	52.19	-16.01	68.20	40.03	36.93	8.00	32.77	Peak	---	---
2	11590.00	42.46	-11.54	54.00	25.43	39.35	10.03	32.35	Average	---	---
3	11590.00	56.19	-17.81	74.00	39.16	39.35	10.03	32.35	Peak	---	---
4	17385.00	63.40	-4.80	68.20	39.60	43.29	11.94	31.43	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	H

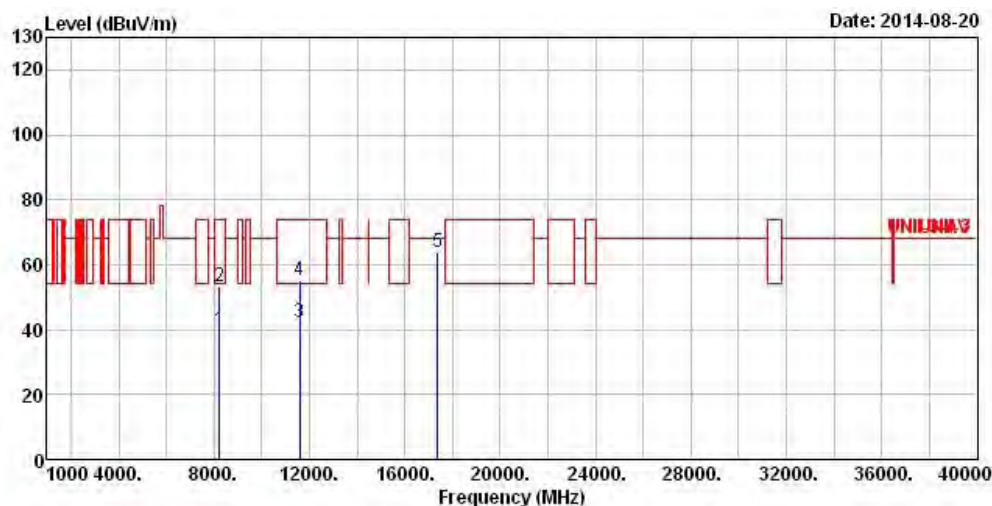

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8228.00	39.68	-14.32	54.00	26.77	37.55	8.16	32.80	Average	---	---
2	8228.00	53.39	-20.61	74.00	40.48	37.55	8.16	32.80	Peak	---	---
3	11590.00	42.38	-11.62	54.00	25.35	39.35	10.03	32.35	Average	---	---
4	11590.00	55.25	-18.75	74.00	38.22	39.35	10.03	32.35	Peak	---	---
5	17385.00	63.79	-4.41	68.20	39.99	43.29	11.94	31.43	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

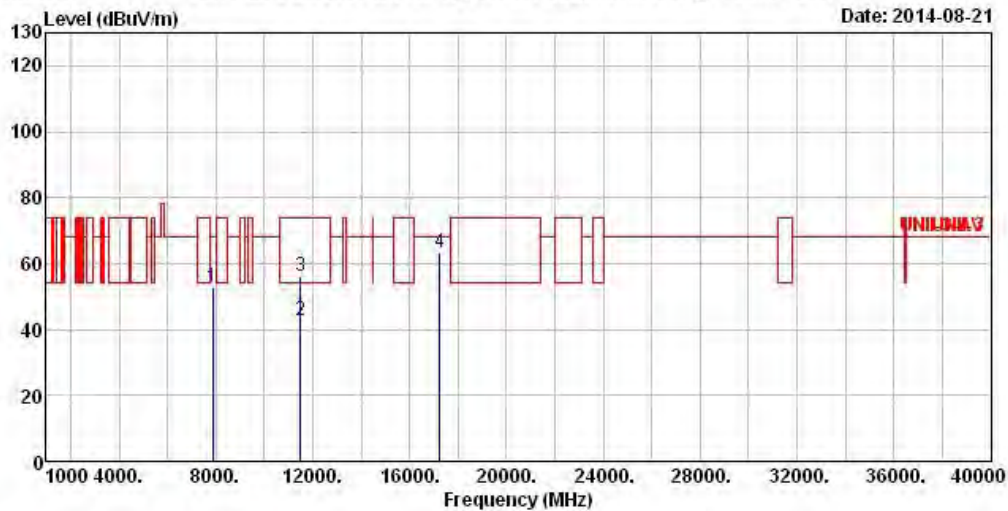

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	53.00	-15.20	68.20	40.66	36.98	8.14	32.78	Peak	---	---
2	11490.00	42.75	-11.25	54.00	25.77	39.28	10.04	32.34	Average	---	---
3	11490.00	56.16	-17.84	74.00	39.18	39.28	10.04	32.34	Peak	---	---
4	17235.00	63.54	-4.66	68.20	41.21	42.12	11.59	31.38	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

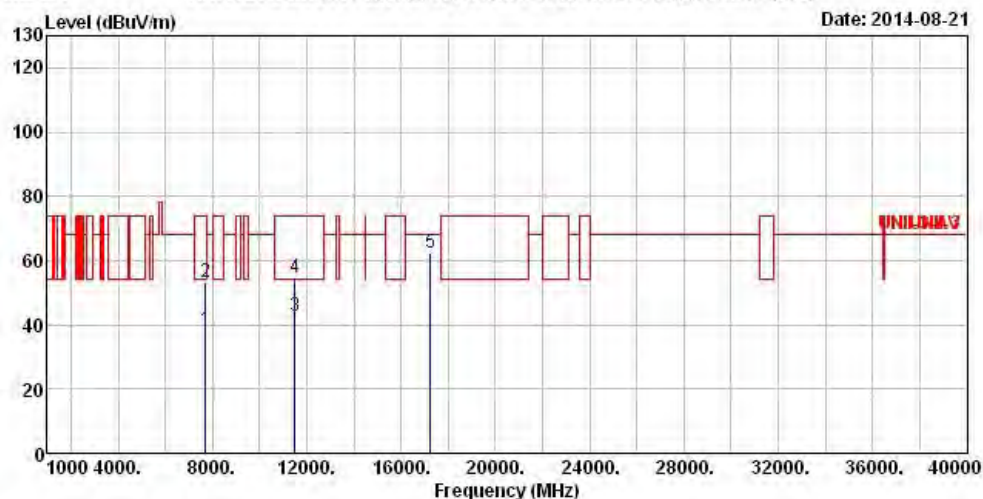

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7692.00	38.35	-15.65	54.00	26.52	36.80	7.78	32.75	Average	---	---
2	7692.00	53.20	-20.80	74.00	41.37	36.80	7.78	32.75	Peak	---	---
3	11490.00	42.77	-11.23	54.00	25.79	39.28	10.04	32.34	Average	---	---
4	11490.00	54.77	-19.23	74.00	37.79	39.28	10.04	32.34	Peak	---	---
5	17235.00	62.40	-5.80	68.20	40.07	42.12	11.59	31.38	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

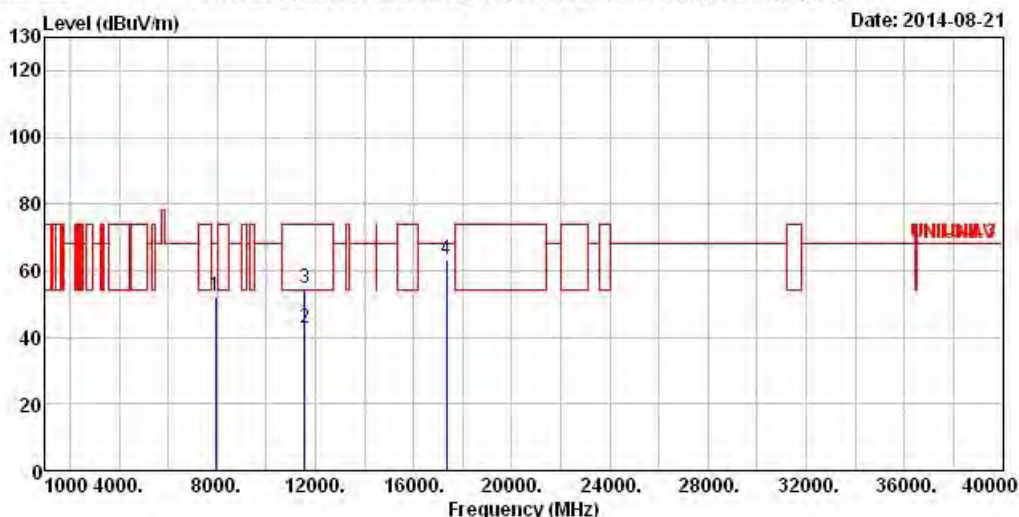

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7948.00	52.38	-15.82	68.20	39.91	37.05	8.21	32.79	Peak	---	---
2	11570.00	42.67	-11.33	54.00	25.64	39.34	10.04	32.35	Average	---	---
3	11570.00	54.58	-19.42	74.00	37.55	39.34	10.04	32.35	Peak	---	---
4	17355.00	63.47	-4.73	68.20	40.00	43.03	11.85	31.41	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

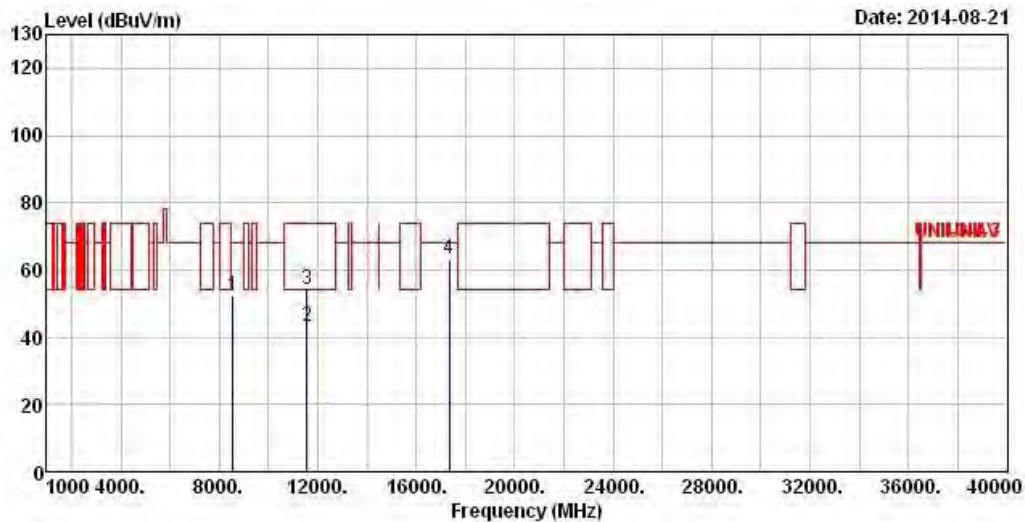

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8568.00	52.49	-15.71	68.20	39.23	38.13	7.97	32.84	Peak	---	---
2	11570.00	43.16	-10.84	54.00	26.13	39.34	10.04	32.35	Average	---	---
3	11570.00	54.20	-19.80	74.00	37.17	39.34	10.04	32.35	Peak	---	---
4	17355.00	63.25	-4.95	68.20	39.78	43.03	11.85	31.41	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

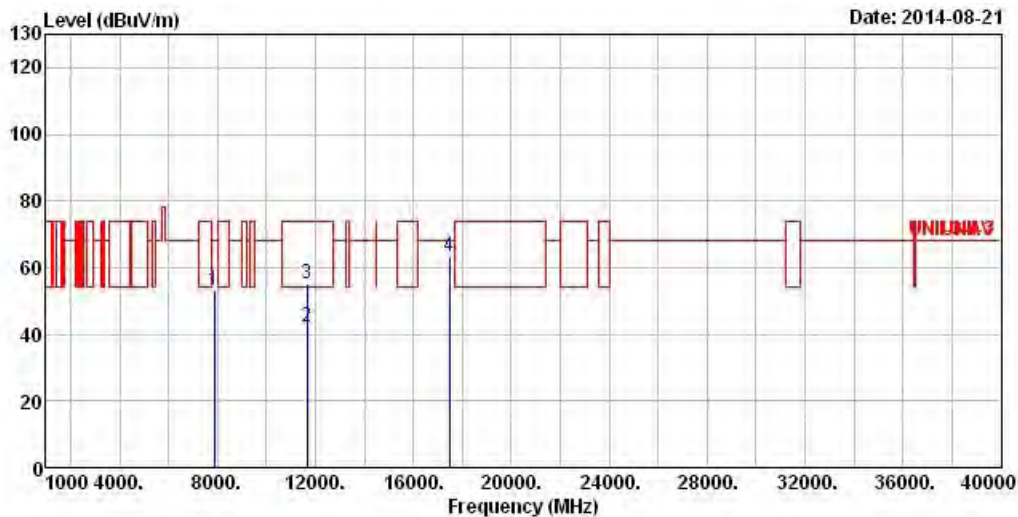

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	/MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7860.00	53.33	-14.87	68.20	41.07	36.97	8.07	32.78	Peak	---	---
2	11650.00	42.26	-11.74	54.00	25.21	39.38	10.03	32.36	Average	---	---
3	11650.00	55.02	-18.98	74.00	37.97	39.38	10.03	32.36	Peak	---	---
4	17475.00	63.38	-4.82	68.20	38.78	43.94	12.11	31.45	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

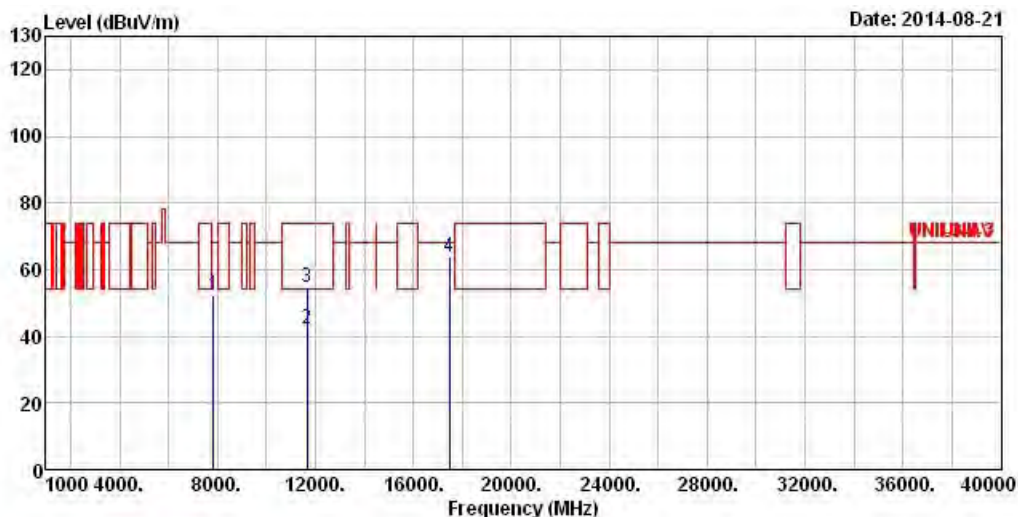

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	/MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7844.00	52.38	-15.82	68.20	40.20	36.95	8.00	32.77	Peak	---
2	11650.00	42.16	-11.84	54.00	25.11	39.38	10.03	32.36	Average	---
3	11650.00	54.86	-19.14	74.00	37.81	39.38	10.03	32.36	Peak	---
4	17475.00	63.96	-4.24	68.20	39.36	43.94	12.11	31.45	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	V

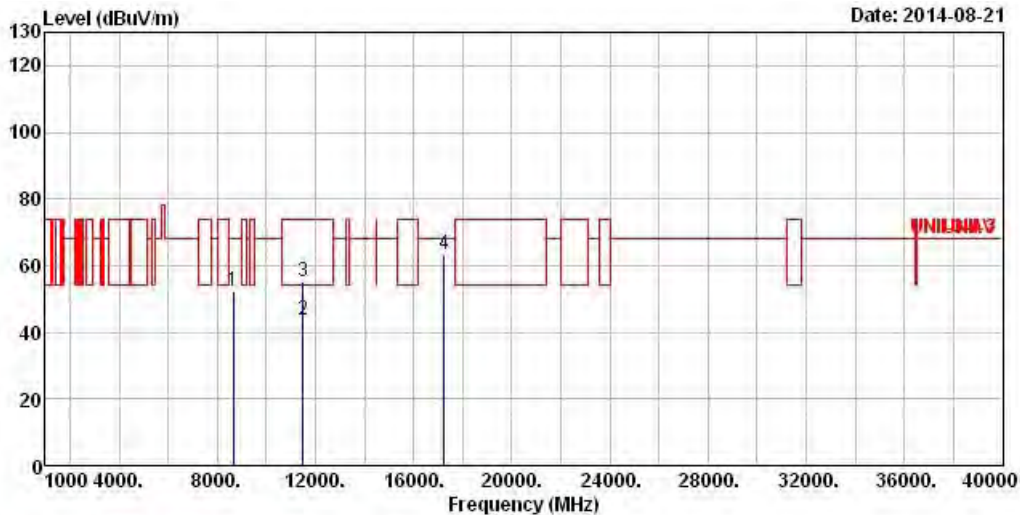

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark	A/Pos	T/Pos
	/MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg
1	8652.00	52.47	-15.73	68.20	39.24	38.16	7.93	32.86	Peak	---
2	11510.00	43.88	-10.12	54.00	26.88	39.30	10.04	32.34	Average	---
3	11510.00	55.27	-18.73	74.00	38.27	39.30	10.04	32.34	Peak	---
4	17265.00	63.21	-4.99	68.20	40.54	42.38	11.68	31.39	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	H

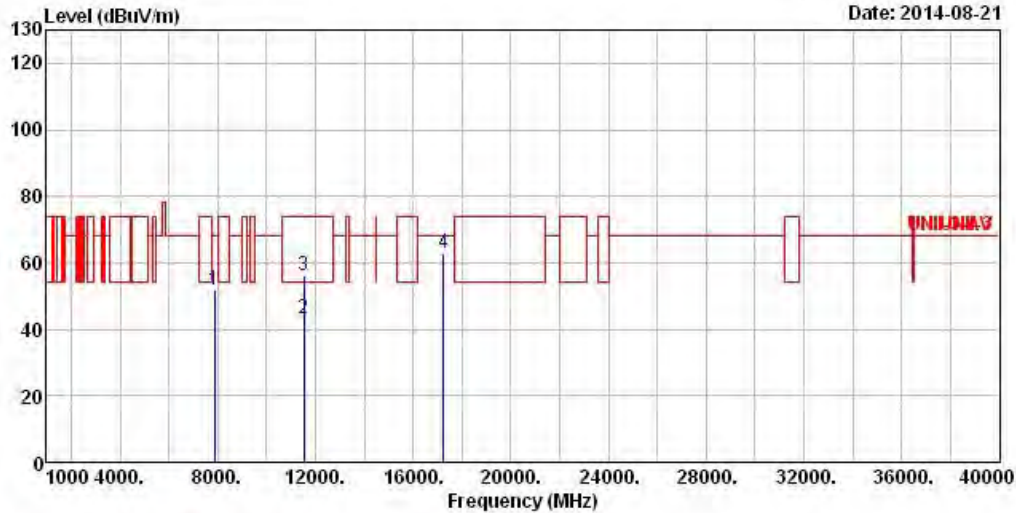

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7884.00	51.69	-16.51	68.20	39.35	36.98	8.14	32.78	Peak	---	---
2	11540.00	43.31	-10.69	54.00	26.29	39.32	10.04	32.34	Average	---	---
3	11540.00	56.32	-17.68	74.00	39.30	39.32	10.04	32.34	Peak	---	---
4	17265.00	63.01	-5.19	68.20	40.34	42.38	11.68	31.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	V

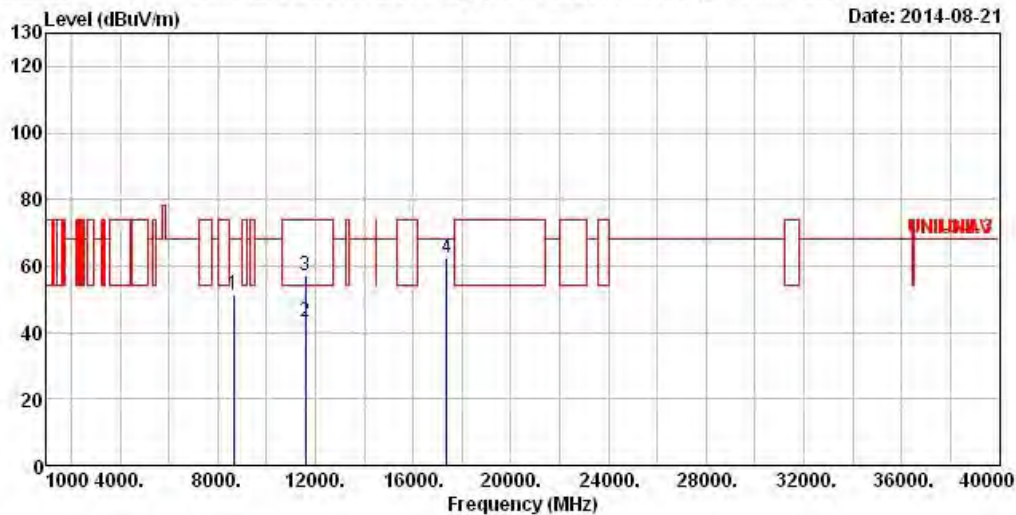

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8652.00	51.32	-16.88	68.20	38.09	38.16	7.93	32.86	Peak	---
2	11590.00	43.41	-10.59	54.00	26.38	39.35	10.03	32.35	Average	---
3	11590.00	57.27	-16.73	74.00	40.24	39.35	10.03	32.35	Peak	---
4	17385.00	62.28	-5.92	68.20	38.48	43.29	11.94	31.43	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	H

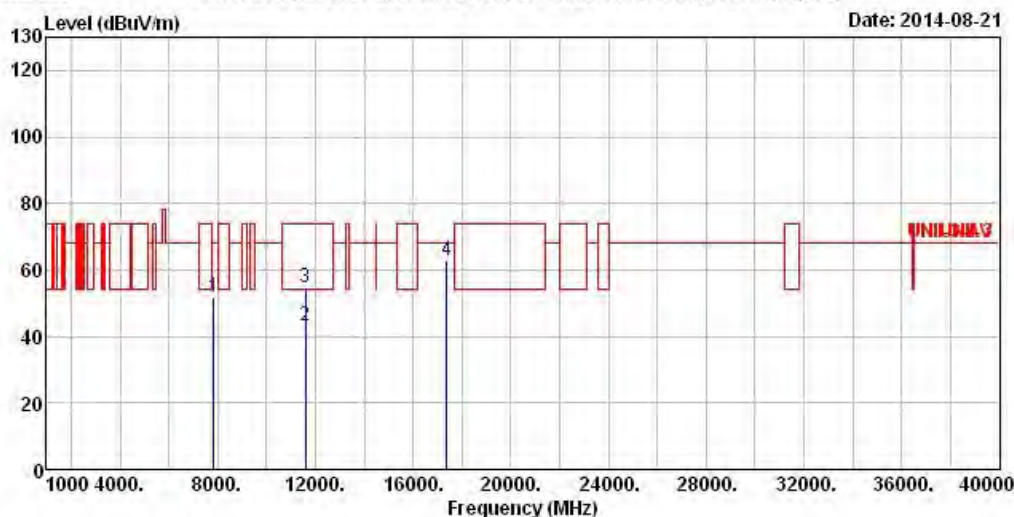

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7845.00	51.59	-16.61	68.20	39.34	36.95	8.07	32.77	Peak	---
2	11590.00	43.37	-10.63	54.00	26.34	39.35	10.03	32.35	Average	---
3	11590.00	54.56	-19.44	74.00	37.53	39.35	10.03	32.35	Peak	---
4	17385.00	62.83	-5.37	68.20	39.03	43.29	11.94	31.43	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N_{TX}	1	Polarization	V

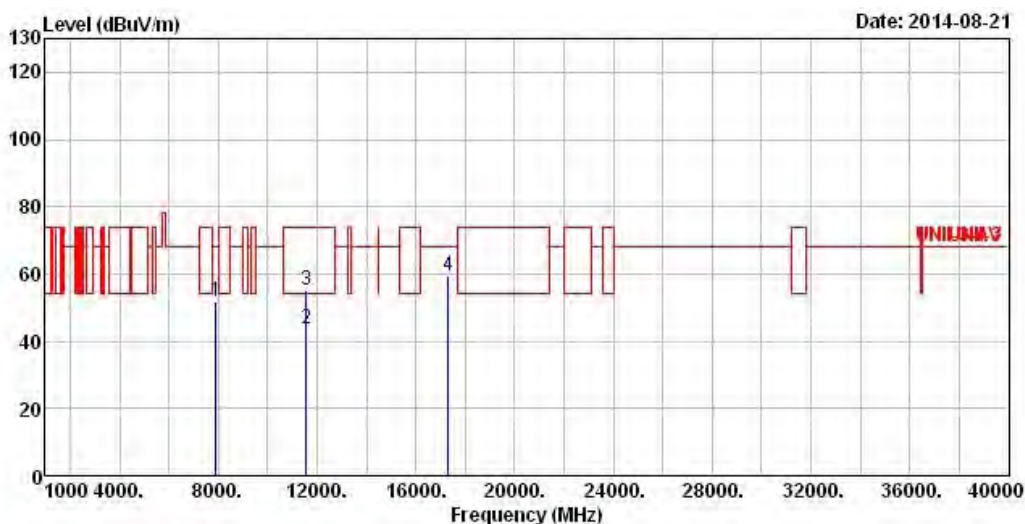

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7888.00	51.62	-16.58	68.20	39.28	36.98	8.14	32.78	Peak	---	---
2	11550.00	43.66	-10.34	54.00	26.64	39.33	10.04	32.35	Average	---	---
3	11550.00	55.02	-18.98	74.00	38.00	39.33	10.04	32.35	Peak	---	---
4	17325.00	59.46	-8.74	68.20	36.25	42.77	11.85	31.41	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N_{TX}	1	Polarization	H

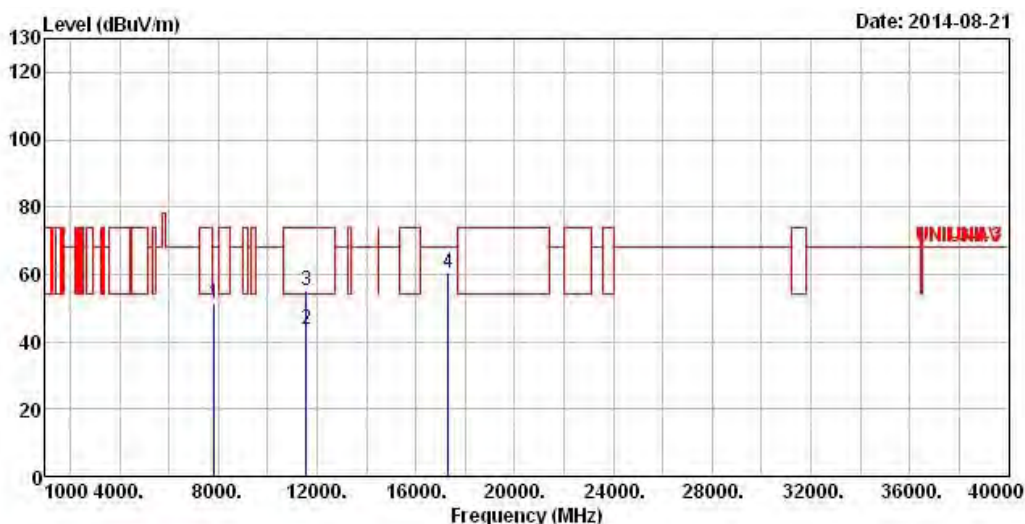

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7845.00	51.38	-16.82	68.20	39.13	36.95	8.07	32.77	Peak	---	---
2	11550.00	43.55	-10.45	54.00	26.53	39.33	10.04	32.35	Average	---	---
3	11550.00	55.02	-18.98	74.00	38.00	39.33	10.04	32.35	Peak	---	---
4	17325.00	60.42	-7.78	68.20	37.21	42.77	11.85	31.41	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

3.7 Frequency Stability

3.7.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
☒	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
IEEE Std. 802.11n-2009	
☒	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
☒	Frequency stability with respect to ambient temperature
☒	Frequency stability when varying supply voltage
☒	For conducted measurement.
☒	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
☐	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.7.4 Test Setup

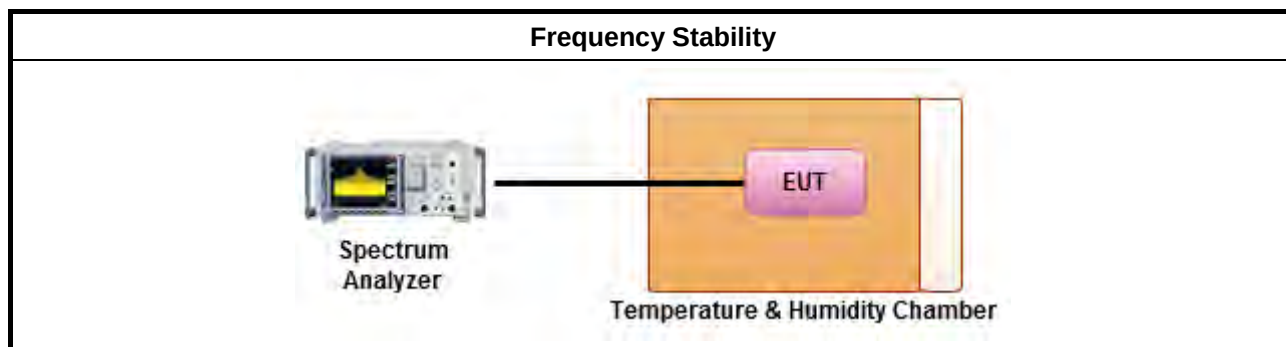

3.7.5 Test Result of Frequency Stability

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T _{20°C} V _{max}	5300	5300.00781	1.4736
T _{20°C} V _{min}	5300	5300.00738	1.3925
T _{50°C} V _{nom}	5300	5299.98307	-3.1943
T _{40°C} V _{nom}	5300	5299.98915	-2.0472
T _{30°C} V _{nom}	5300	5299.99740	-0.4906
T _{20°C} V _{nom}	5300	5300.00825	1.5566
T _{10°C} V _{nom}	5300	5300.01476	2.7849
T _{0°C} V _{nom}	5300	5300.02475	4.6698
T _{-10°C} V _{nom}	5300	5300.02692	5.0792
T _{-20°C} V _{nom}	5300	5300.02735	5.1604
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].			
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.			

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9kHz ~ 40GHz	Jan. 25, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	RF Conducted
RF Cable-1m	HUBER+SUHNER	SUCOFLEX_104	SN 324557	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
DC Power Source	G.W.	GPS-3030DD	GEN865896	DC 0V ~ 30V	Nov. 21, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation
Horn Antenna	ETS • LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiated
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two year.