



HannStar Electronics Corporation

# **Molokai Antenna Regulatory Report**

**HannStar Electronics Corporation**

No. 431, RueiGuang Rd., NeiHu 114, Taipei, Taiwan, R.O.C.



HannStar Electronics Corporation

## Antenna Specifications

Antenna Type (Material, Technology)	Metal PIFA Antenna
Antenna Model Number	Molokai / WA00122, WA00123
Operating Frequency Range(s)	2.4~2.4835 GHz, 4.9~5.35 GHz, 5.47~5.875 GHz
Peak Gain (802.11b/g / 2.4GHz Band) (dBi)	0.23 for Main, -0.08 for Aux
Peak Gain (802.11a / 5GHz Band) (dBi)	-0.34 for Main, -0.95 for Aux
Radio Connector Type	I-Pex MHF, Hirose U.FL-LP
Mid-Line Connector Type (If Applicable)	N/A

**Note:** Peak Gain should include all system losses (connector, cable, etc)

## Cable Specifications

Cable Parameters	Main			Aux		
	LCD Side	Base Side	Total	LCD Side	Base Side	Total
Length (mm)	N/A	N/A	628.5	N/A	N/A	607.5
Loss (Including Connectors) (dB)			-1.56 for 2.4GHz -2.03 for 5.0GHz			-1.48 for 2.4GHz -1.98 for 5.0GHz
Description (Color, Diameter, Manufacturer)	White, 1.13mm, Hannstar			Black, 1.13mm, Hannstar		





**Note:** For single cable assembly (no mid-line connector), use the 'Total' column for each cable length and list N/A in the 'LCD' and 'Base' fields

Cable Loss should be reported for the total cable assembly (for both Main and Aux antennas)





# HannStar Electronics Corporation

## 1. Pictures of Antennas

Main Antenna	Aux Antenna
	
	


## 2. Antenna Drawings (See Next 2 Pages)

REV.	ECN NO.	ECN BY.	REVISIONS	DESCRIPTION	DATE
A	EP030885	Leo	New Release		10/10 '03

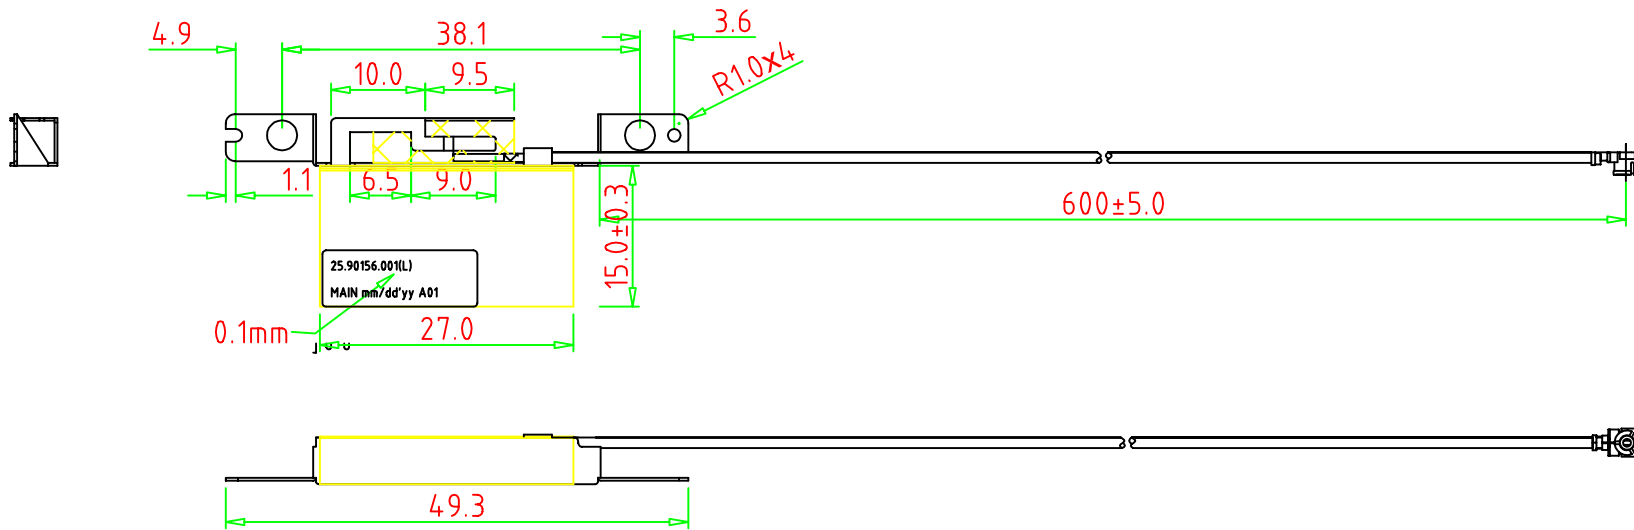

Coaxial Cable HITACHI  $\Phi$ 1.13 White 600mm

Detail of Label  
SCALE 2:1


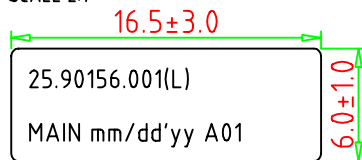


字形: Arial  
大小: 4 粗體

ITEM NO.	QTY REQD	PART NUMBER	DESCRIPTION
1	1	U013-012-0021	SPONGE H48 3M467 8x3.5x5t
2	1	U010-007-0079	Molocai Metal Antenna Left
3	1	U011-002-0010-12	Coaxial Cable HITACHI $\Phi$ 1.13 White 616mm
4	1	U006-002-0010	I-PEX MHF Connector

X. $\pm$ .X $\pm$ .XX $\pm$ .XXX $\pm$ X° $\pm$ .X° $\pm$	HannStar Electronics Corp.	
	APPD: James 10/01'03	Title: WA00122
	CHKD:	MOLOKAI_L Main Assembly
	DR: Leo 10/01'03	DWG No.: SHEET: 1 / 1 REV: A01

REV.	ECN NO.	ECN BY.	REVISIONS	DESCRIPTION	DATE
A	EP030885	Leo	New Release		10/10 '03

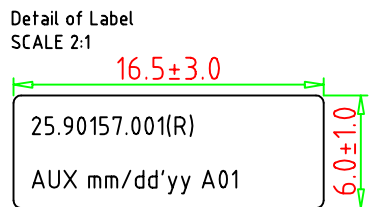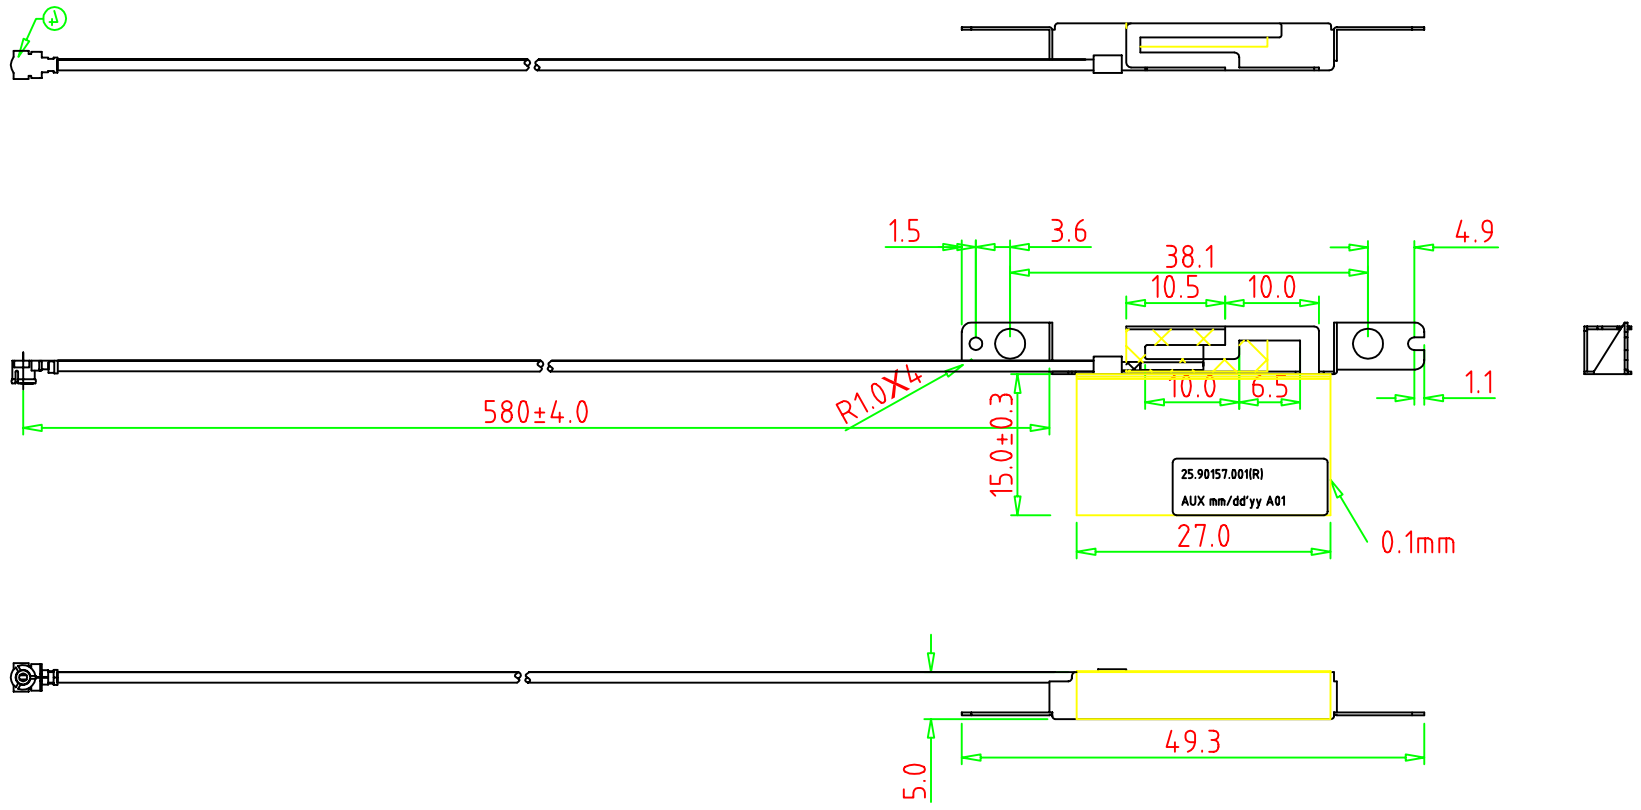

字形:Arial  
大小:4 粗體

ITEM NO.	QTY REQD	PART NUMBER	DESCRIPTION
1	1	U013-012-0021	SPONGE H48 3M467 8x3.5x5t
2	1	U010-007-0080	Molocai Metal Antenna Left
3	1	U011-002-0010-12	Coaxial Cable HITACHI 71.13 Black 595mm
4	1	U006-002-0010	I-PEX MHF Connector

X. ± .X ± .XX ± .XXX ± X° ± .X° ±	HannStar Electronics Corp.	
	APPD: James 10/01'03	Title: WA00123 MOLOKAI_R AUX. Assembly
UNIT: mm (Inch) SCALE: NONE	CHKD:	DWG No.:
	DR: Leo 10/01'03	SHEET: 1 / 1 REV: A01




# HannStar Electronics Corporation

## 3. Radiation Pattern

### (a) Main (Left) Antenna

**2400 MHz Horz+Vert**

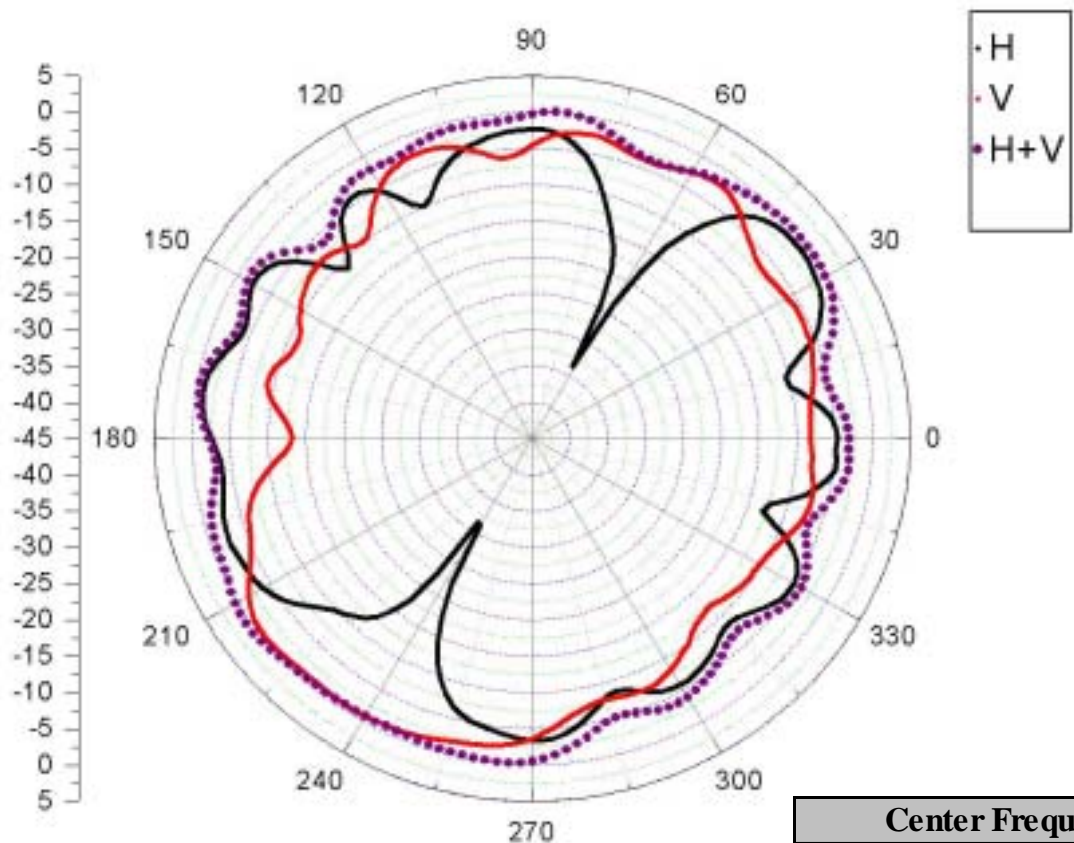


Center Frequency	2400 MHz
Horizontal peak gain (dBi)	-1.74
Vertical peak gain (dBi)	-0.37
Horz +Vert peak gain(dBi)	0.11



HannStar Electronics Corporation

**2450 MHz Horz+Vert**

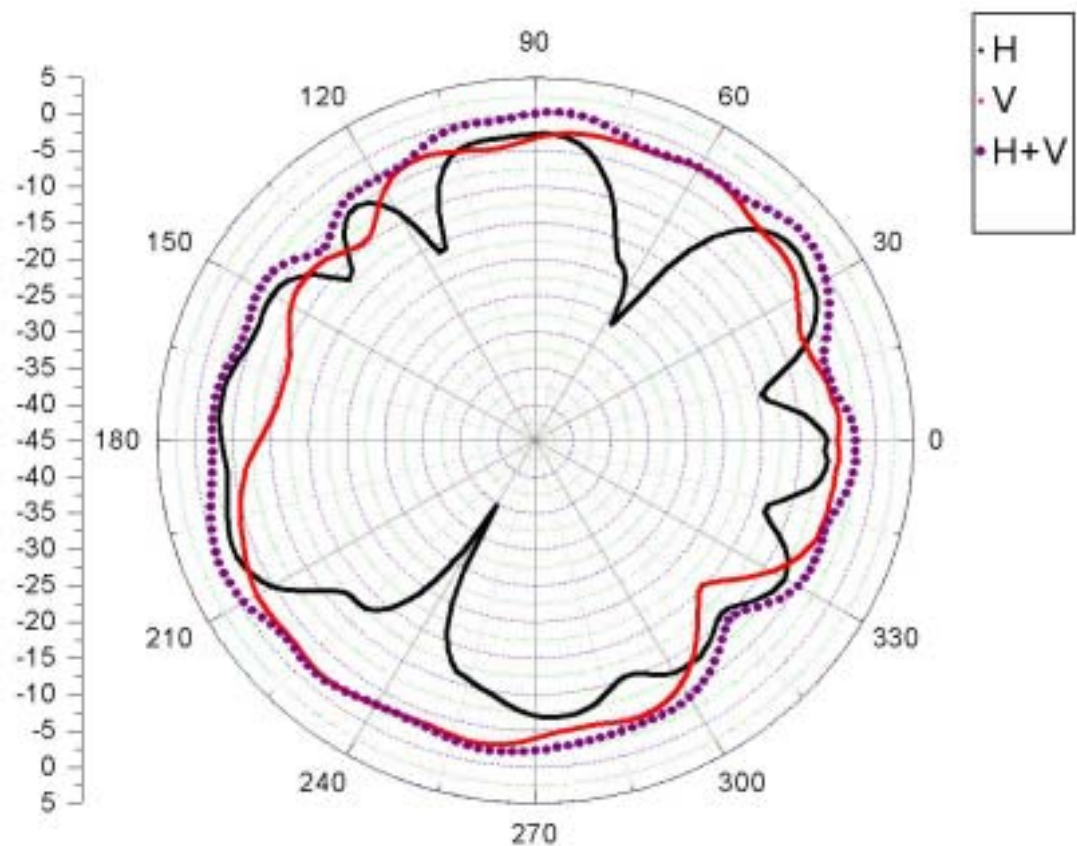


<b>Center Frequency</b>	<b>2450 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.06</b>
<b>Vertical peak gain (dBi)</b>	<b>0.23</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.18</b>



HannStar Electronics Corporation

**2500 MHz Horz+Vert**

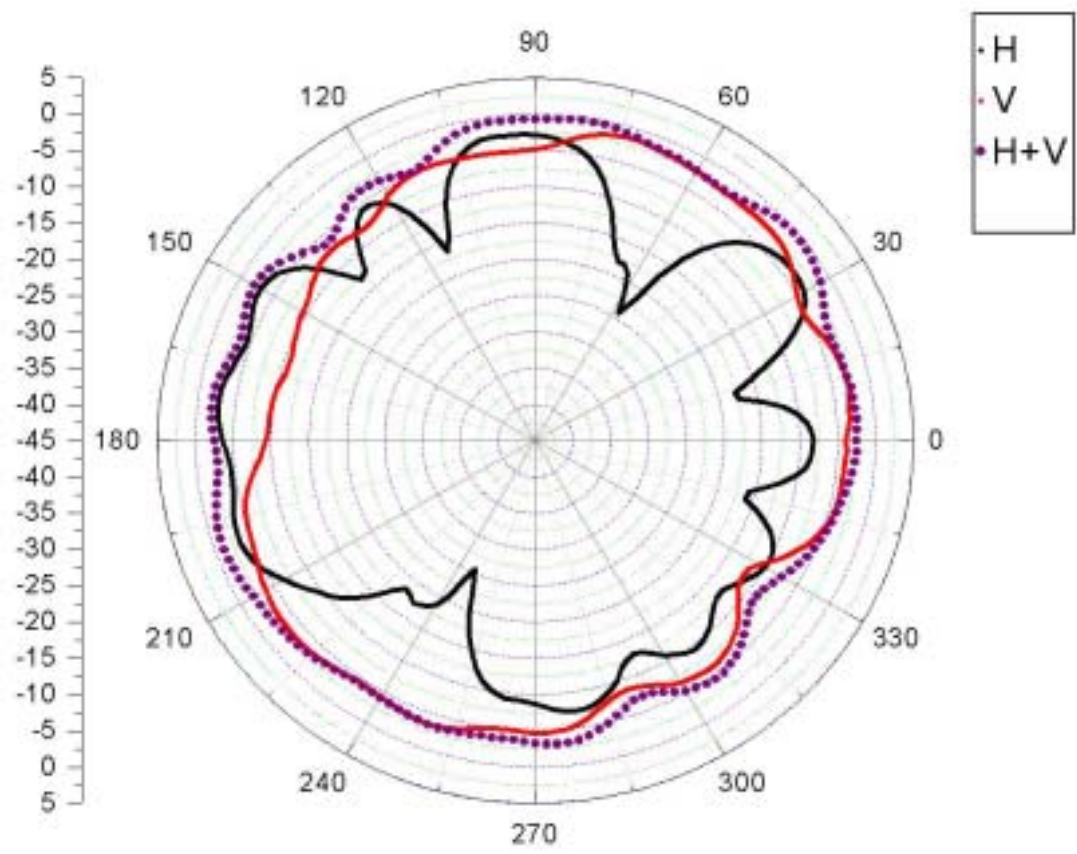


<b>Center Frequency</b>	<b>2500 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-2.15</b>
<b>Vertical peak gain (dBi)</b>	<b>-1.16</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>0.46</b>





HannStar Electronics Corporation

**4900 MHz Horz+Vert**

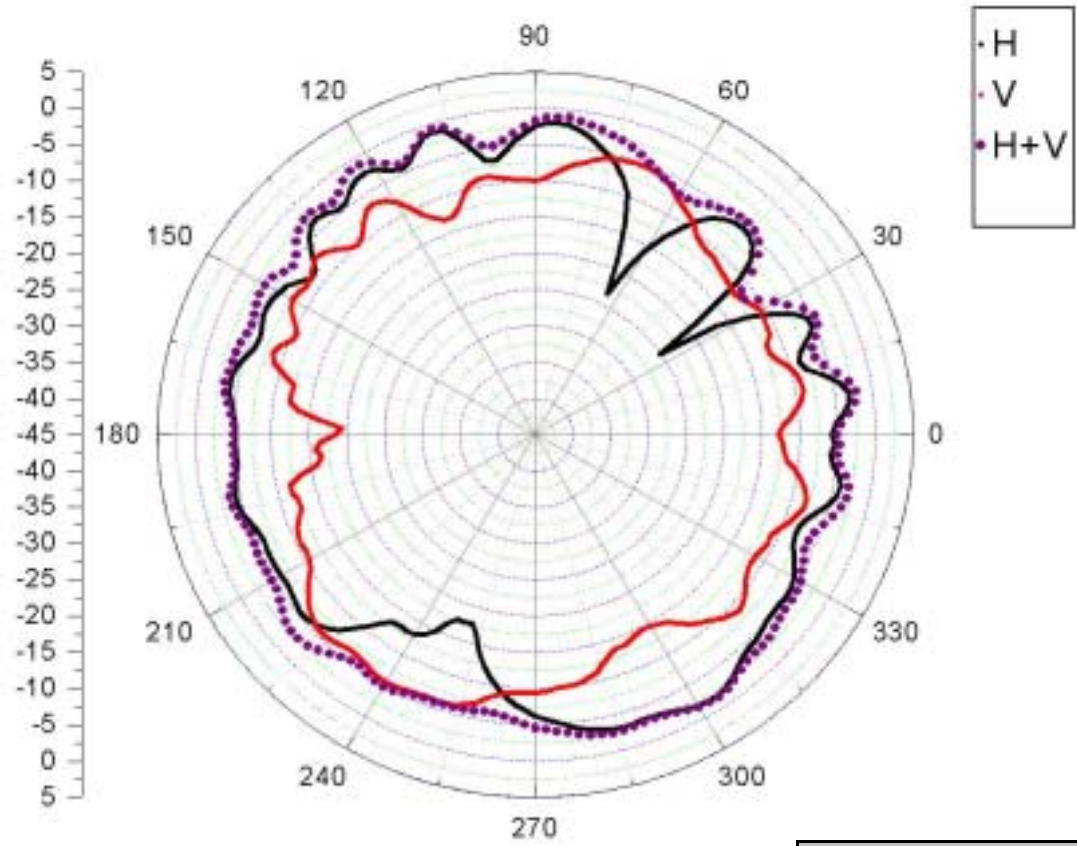


<b>Center Frequency</b>	<b>4900 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>0.81</b>
<b>Vertical peak gain (dBi)</b>	<b>-5.45</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.95</b>



HannStar Electronics Corporation

**5150 MHz Horz+Vert**

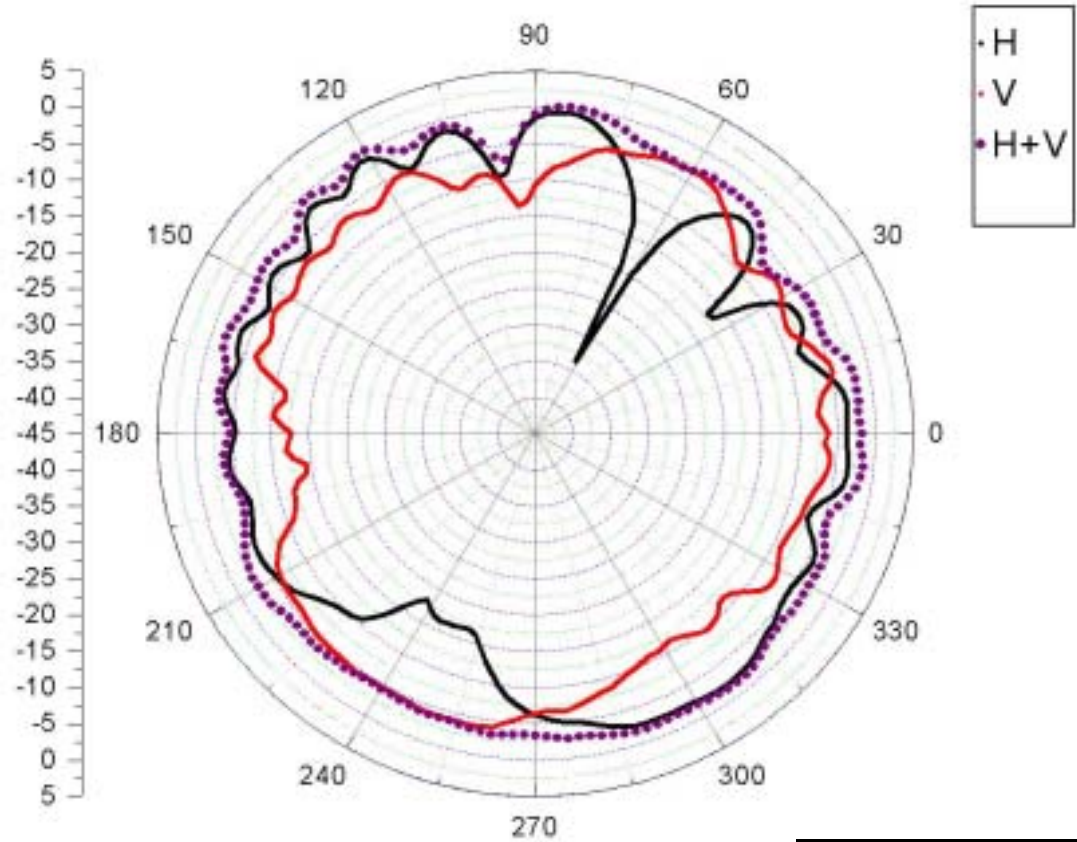


<b>Center Frequency</b>	<b>5150 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-0.59</b>
<b>Vertical peak gain (dBi)</b>	<b>-3.14</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.30</b>



HannStar Electronics Corporation

**5250 MHz Horz+Vert**

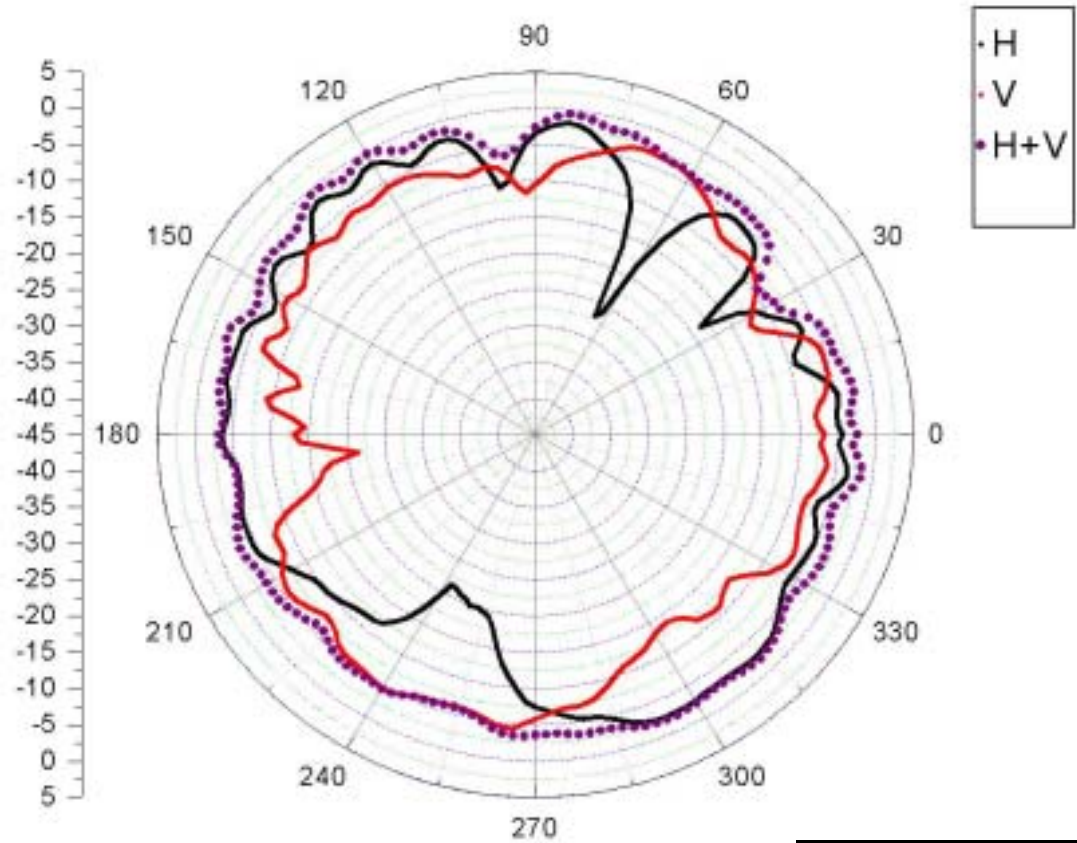


<b>Center Frequency</b>	<b>5250 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-0.34</b>
<b>Vertical peak gain (dBi)</b>	<b>-3.32</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.15</b>



HannStar Electronics Corporation

**5350 MHz Horz+Vert**

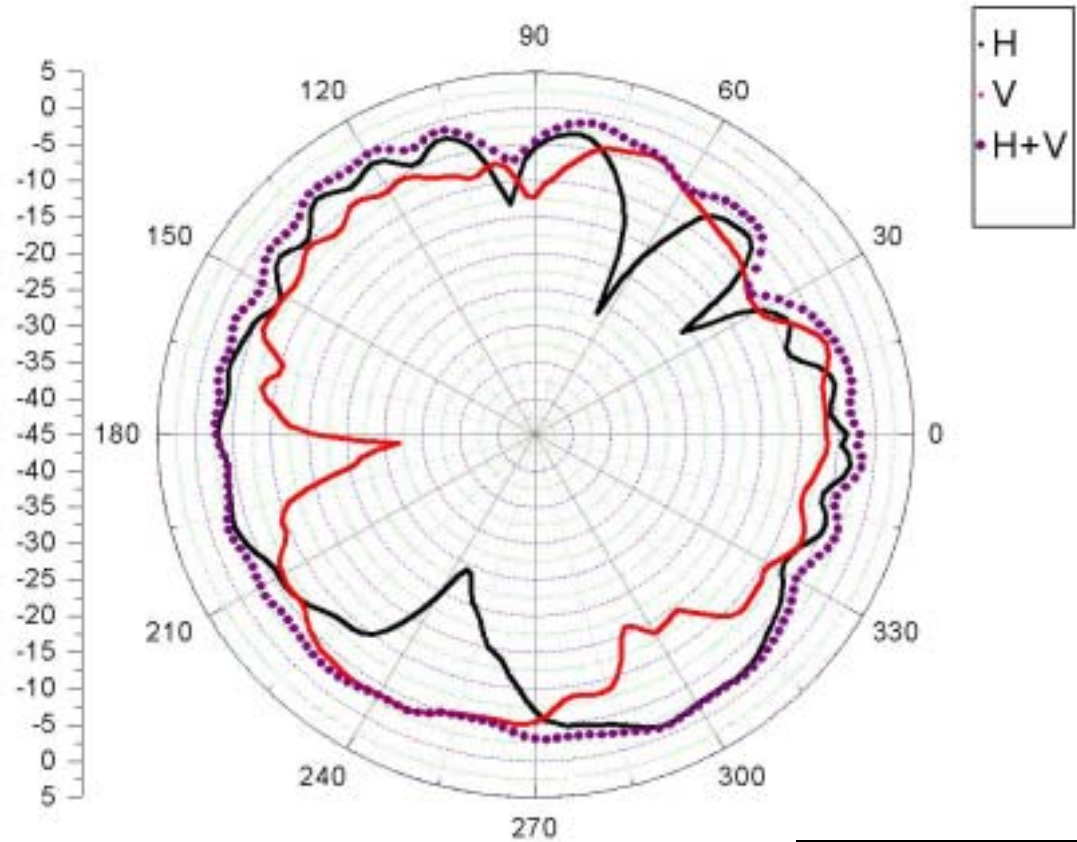


Center Frequency	5350 MHz
Horizontal peak gain (dBi)	-0.41
Vertical peak gain (dBi)	-3.47
Horz +Vert peak gain(dBi)	-0.17



HannStar Electronics Corporation

**5470 MHz Horz+Vert**

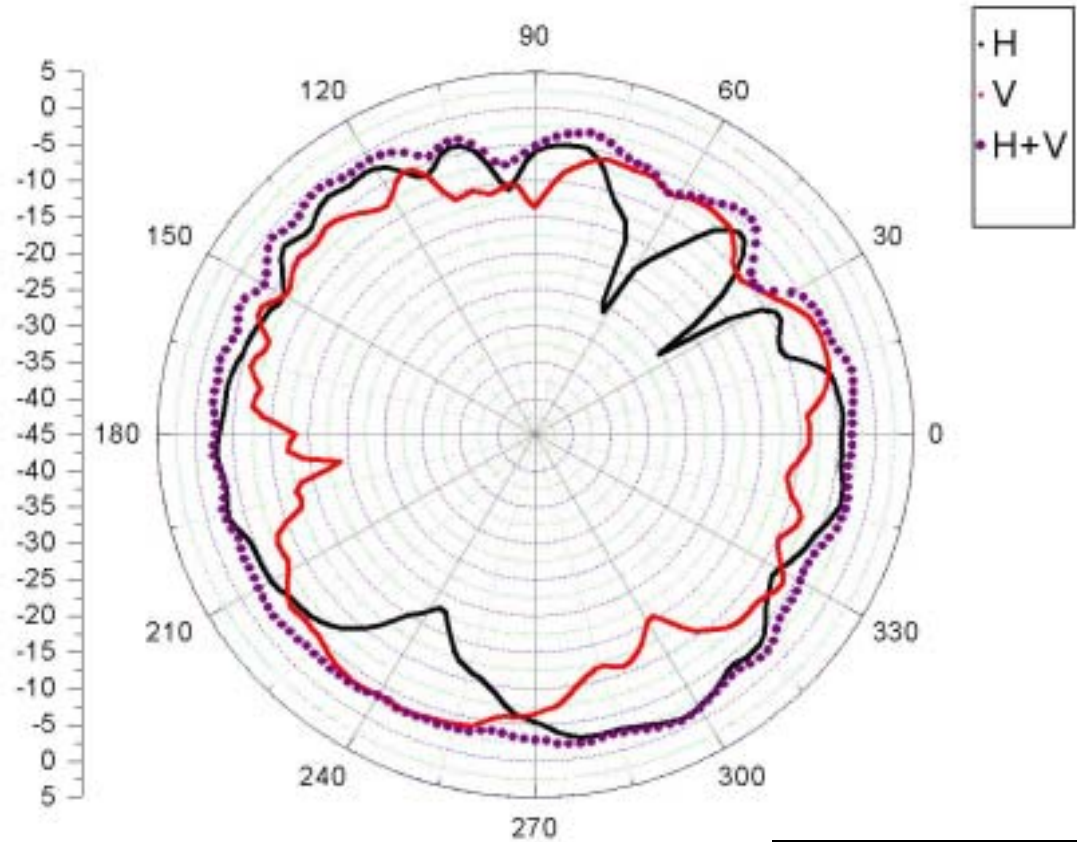


<b>Center Frequency</b>	<b>5470 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-0.48</b>
<b>Vertical peak gain (dBi)</b>	<b>-3.39</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.26</b>



HannStar Electronics Corporation

**5647.5 MHz Horz+Vert**

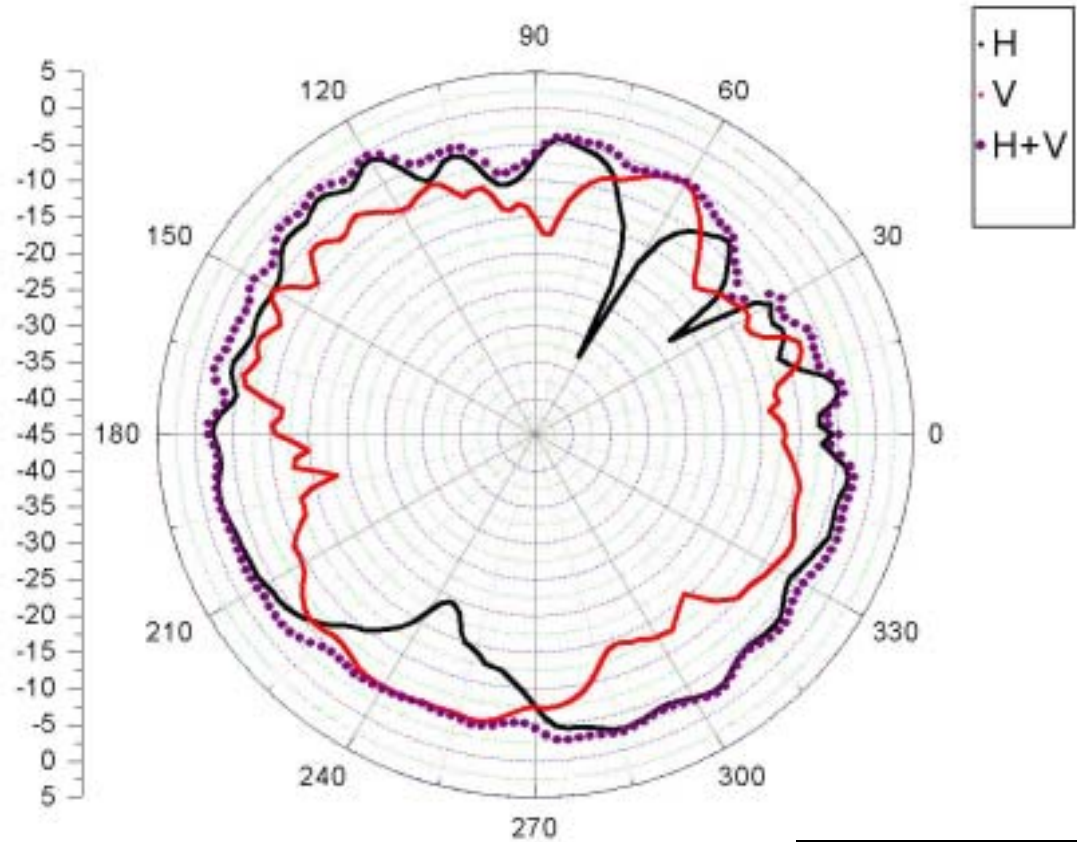


<b>Center Frequency</b>	<b>5647.5 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-2.20</b>
<b>Vertical peak gain (dBi)</b>	<b>-4.37</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.25</b>



HannStar Electronics Corporation

**5825 MHz Horz+Vert**

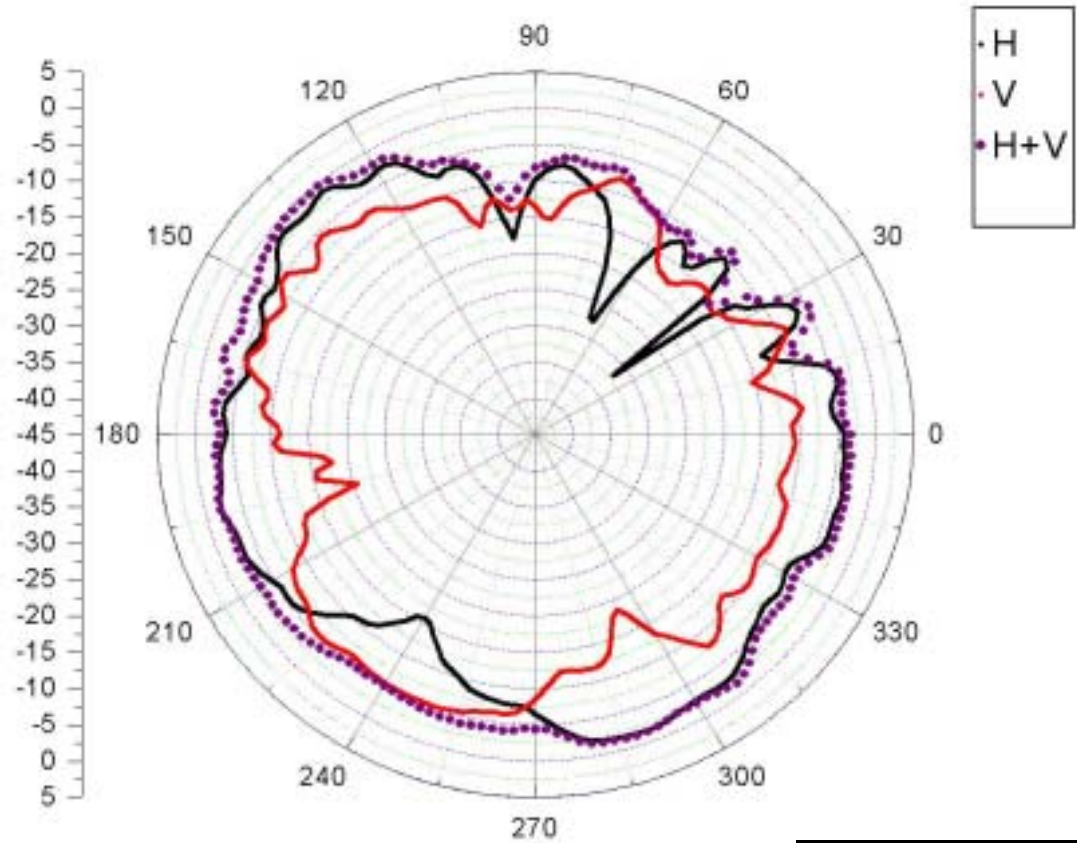


<b>Center Frequency</b>	<b>5825 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.76</b>
<b>Vertical peak gain (dBi)</b>	<b>-5.77</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.18</b>



HannStar Electronics Corporation

(b) Aux (Right) Antenna

**2400 MHz Horz+Vert**

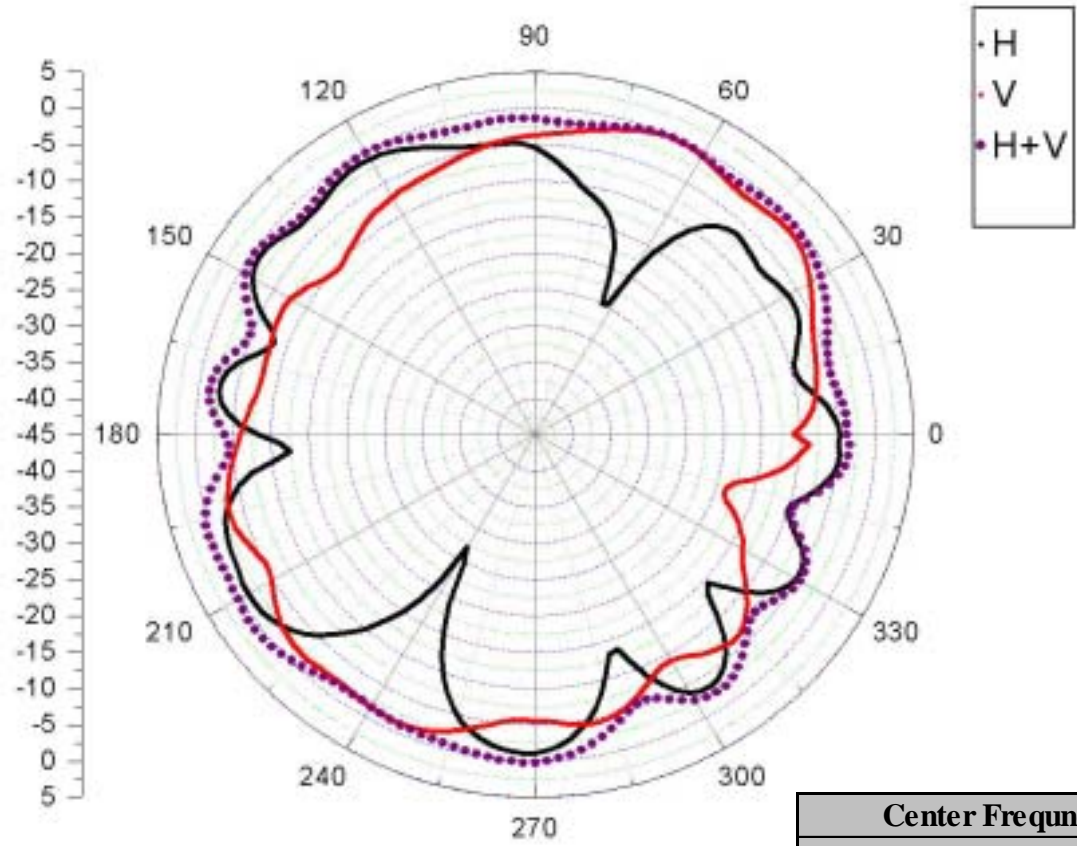


Center Frequency	2400 MHz
Horizontal peak gain (dBi)	-0.08
Vertical peak gain (dBi)	-0.28
Horz +Vert peak gain(dBi)	0.26





HannStar Electronics Corporation

**2450 MHz Horz+Vert**

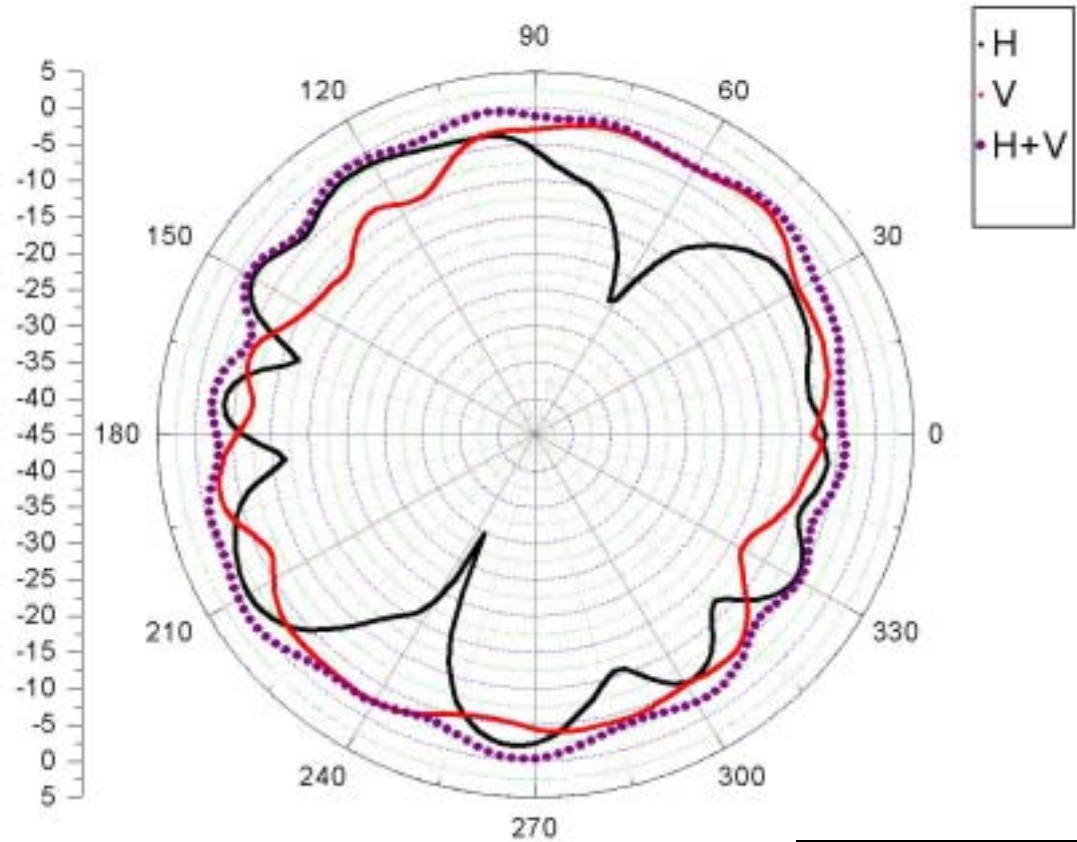


<b>Center Frequency</b>	<b>2450 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.73</b>
<b>Vertical peak gain (dBi)</b>	<b>-1.69</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>0.71</b>



HannStar Electronics Corporation

**2500 MHz Horz+Vert**

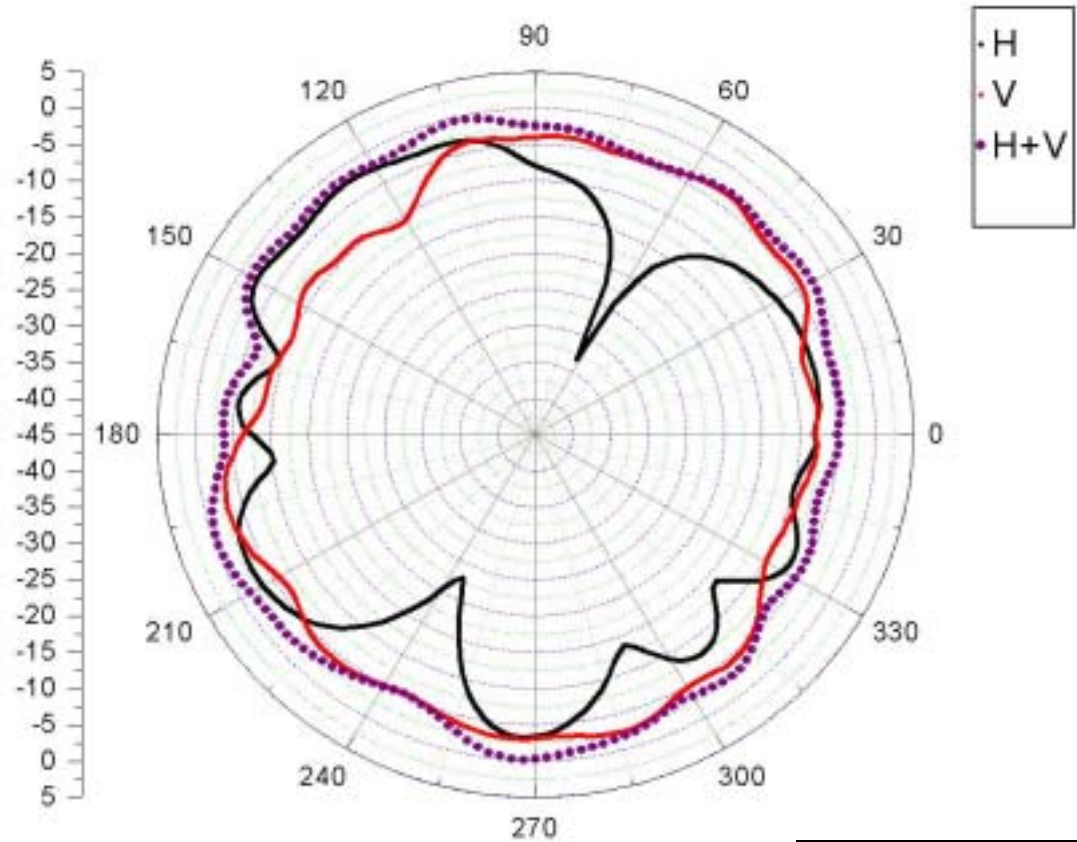


<b>Center Frequency</b>	<b>2500 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-2.73</b>
<b>Vertical peak gain (dBi)</b>	<b>-2.09</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.73</b>



HannStar Electronics Corporation

**4900 MHz Horz+Vert**

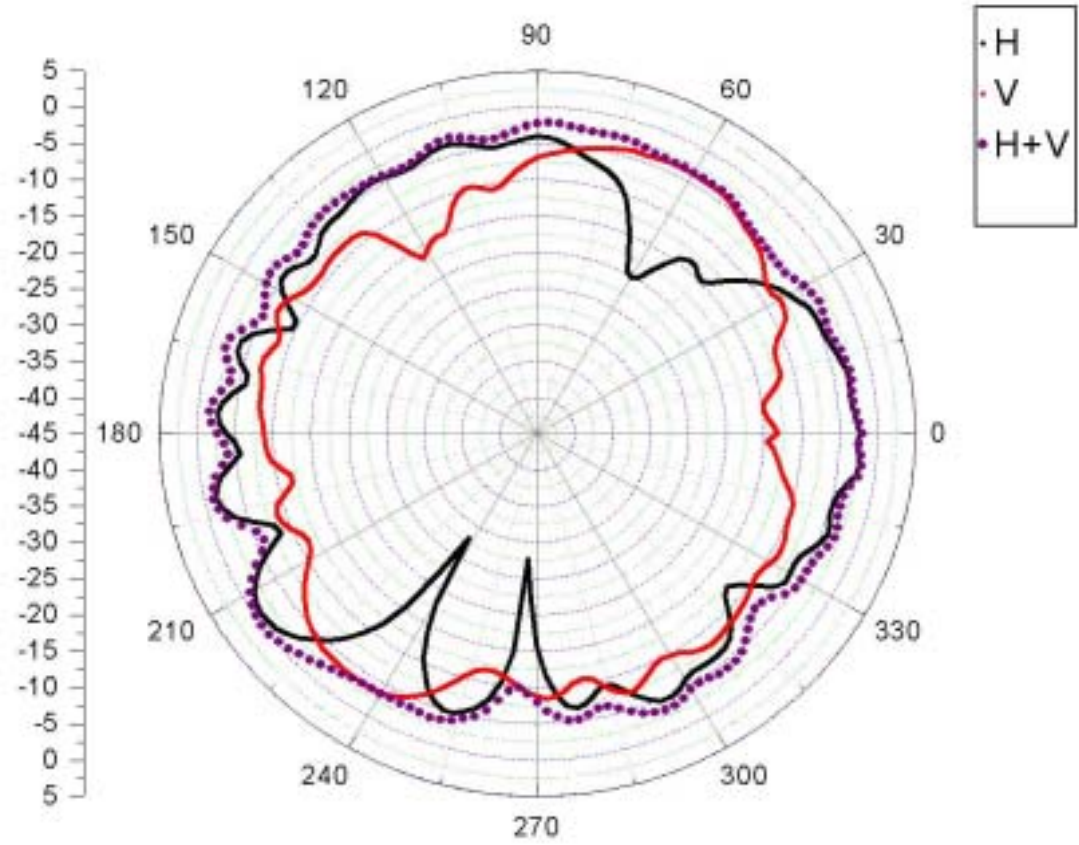


<b>Center Frequency</b>	<b>4900 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-0.92</b>
<b>Vertical peak gain (dBi)</b>	<b>-3.54</b>
<b>Horz + Vert peak gain(dBi)</b>	<b>-0.12</b>



HannStar Electronics Corporation

**5150 MHz Horz+Vert**

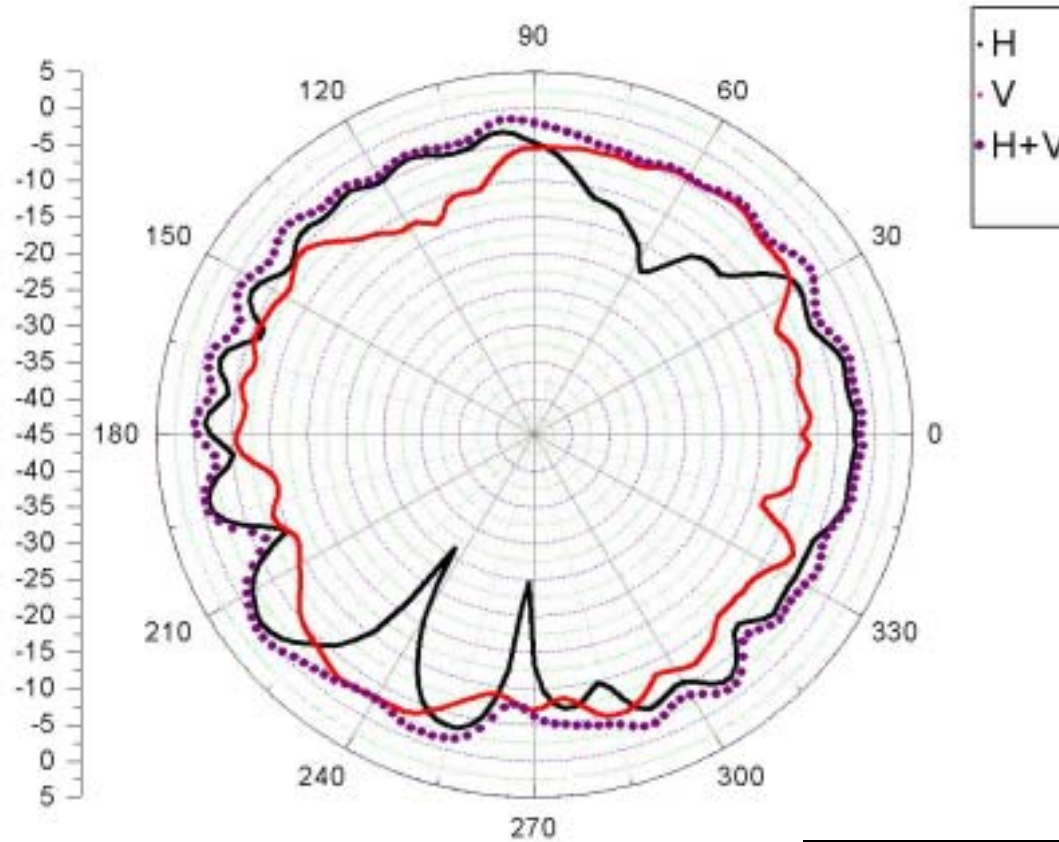


<b>Center Frequency</b>	<b>5150 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-0.95</b>
<b>Vertical peak gain (dBi)</b>	<b>-2.25</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>0.39</b>



HannStar Electronics Corporation

**5250 MHz Horz+Vert**

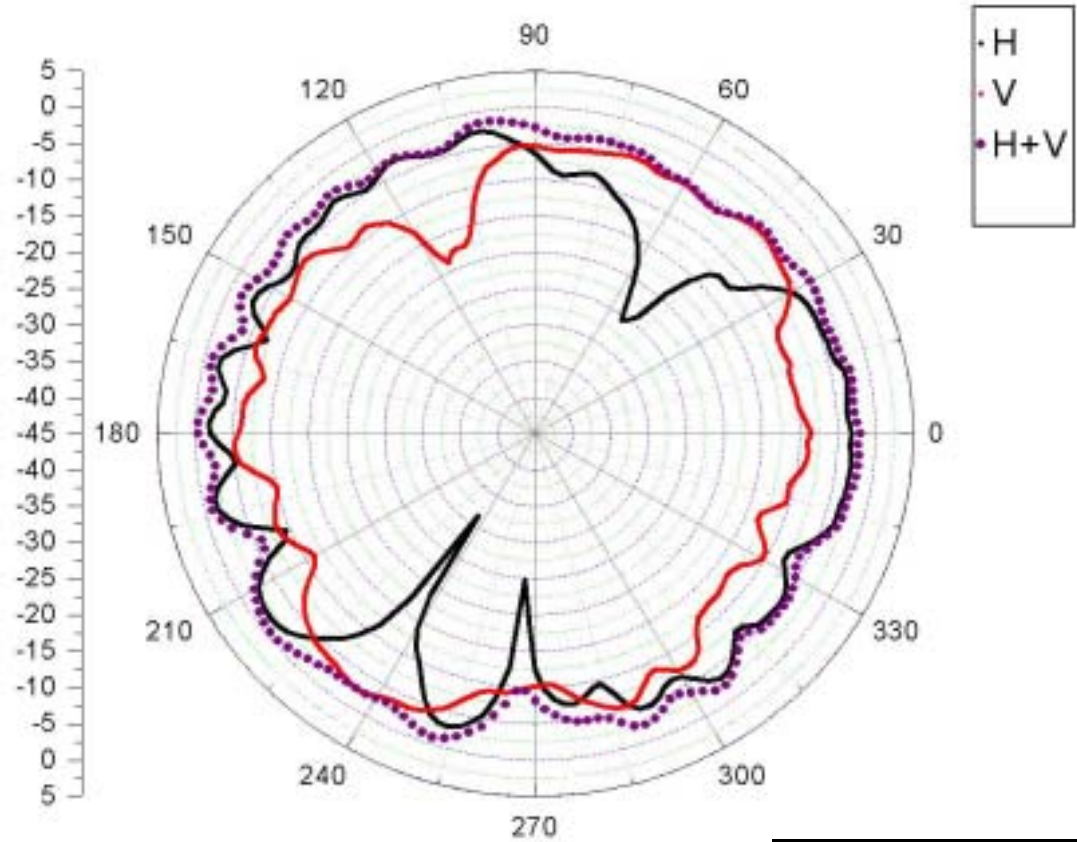


<b>Center Frequency</b>	<b>5250 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.09</b>
<b>Vertical peak gain (dBi)</b>	<b>-2.78</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.41</b>



HannStar Electronics Corporation

**5350 MHz Horz+Vert**

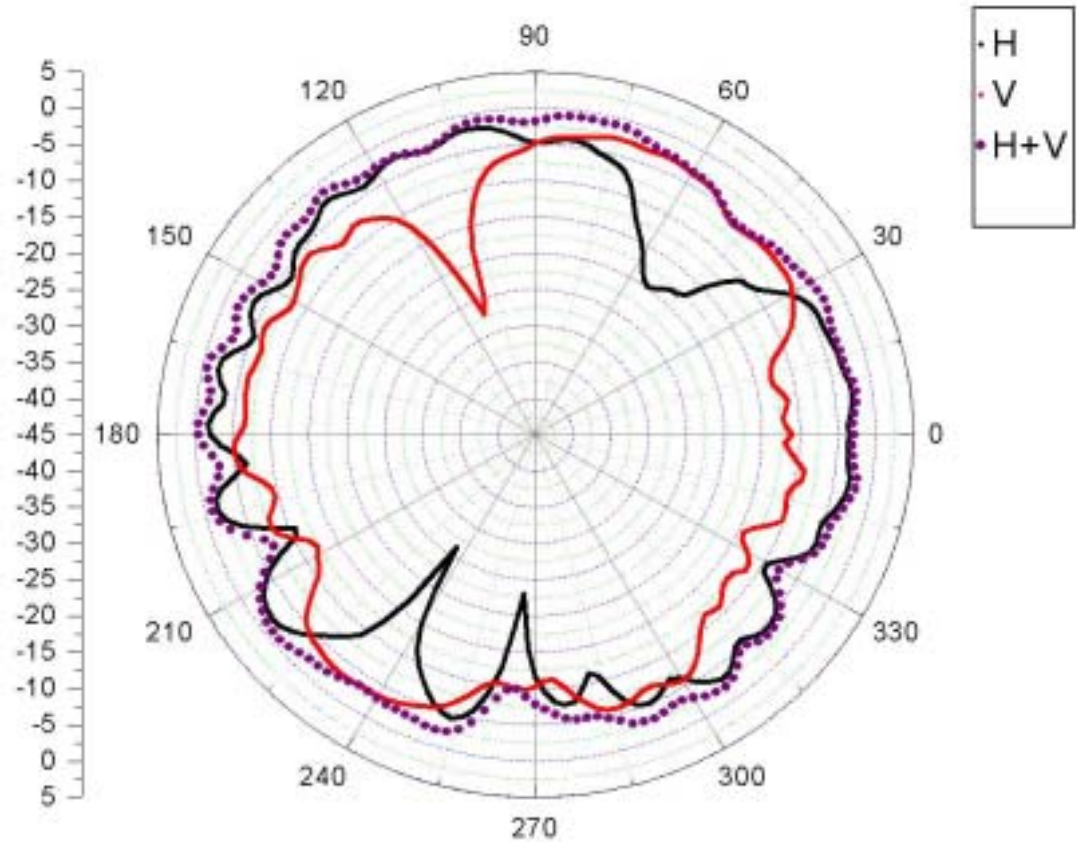


Center Frequency	5350 MHz
Horizontal peak gain (dBi)	-1.40
Vertical peak gain (dBi)	-2.46
Horz +Vert peak gain(dBi)	-0.18



HannStar Electronics Corporation

**5470 MHz Horz+Vert**

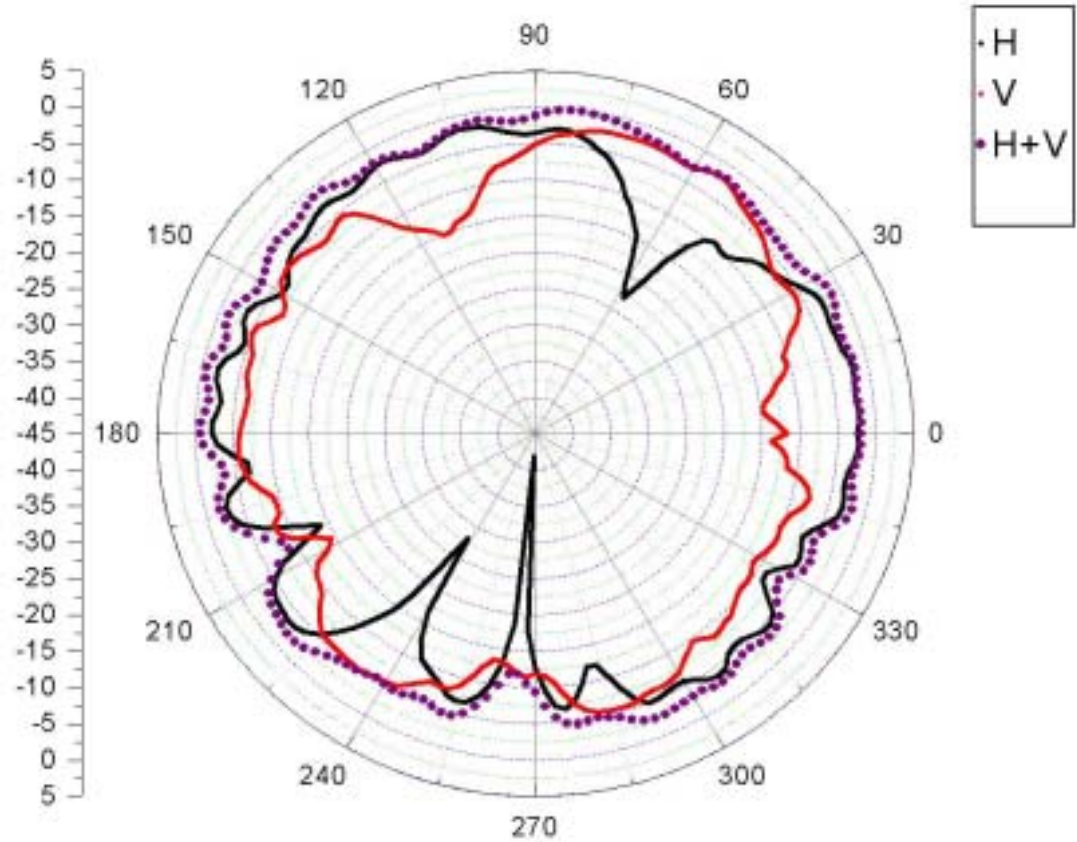


<b>Center Frequency</b>	<b>5470 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.80</b>
<b>Vertical peak gain (dBi)</b>	<b>-1.93</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.52</b>



HannStar Electronics Corporation

**5647.5 MHz Horz+Vert**

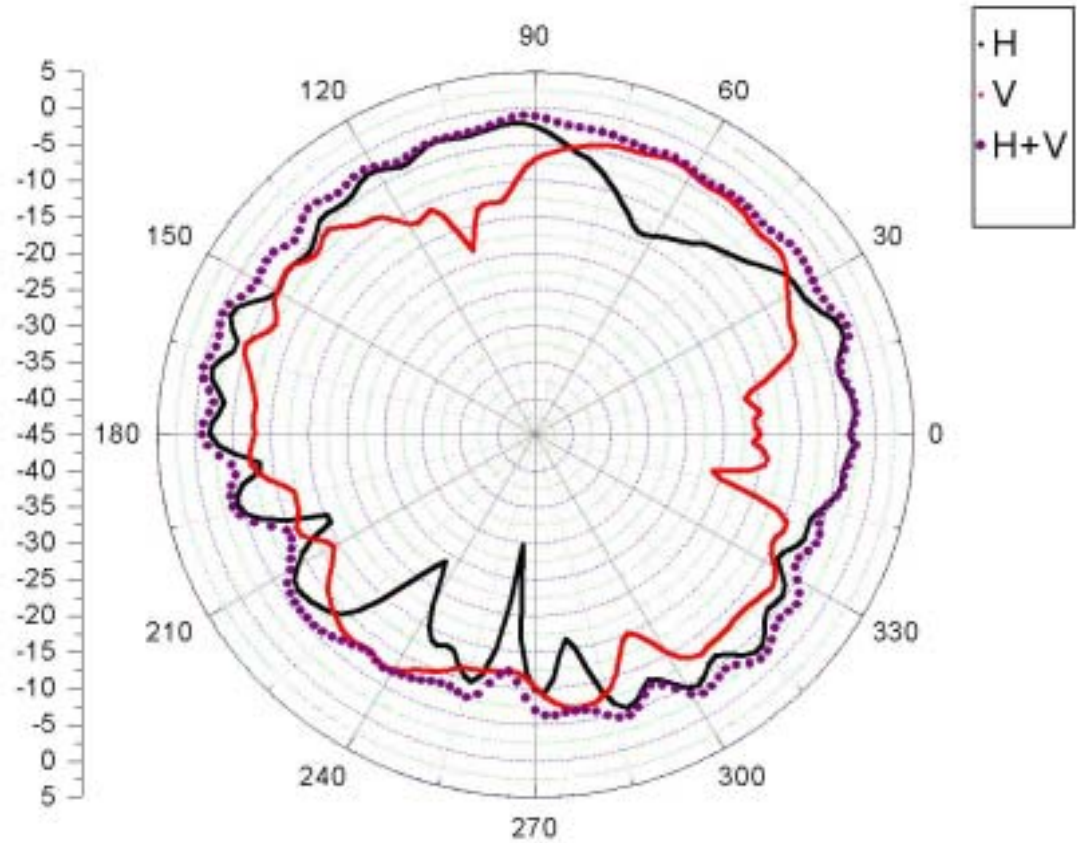


<b>Center Frequency</b>	<b>5647.5 MHz</b>
<b>Horizontal peak gain (dBi)</b>	<b>-1.29</b>
<b>Vertical peak gain (dBi)</b>	<b>-2.62</b>
<b>Horz +Vert peak gain(dBi)</b>	<b>-0.59</b>





HannStar Electronics Corporation

**5825 MHz Horz+Vert**

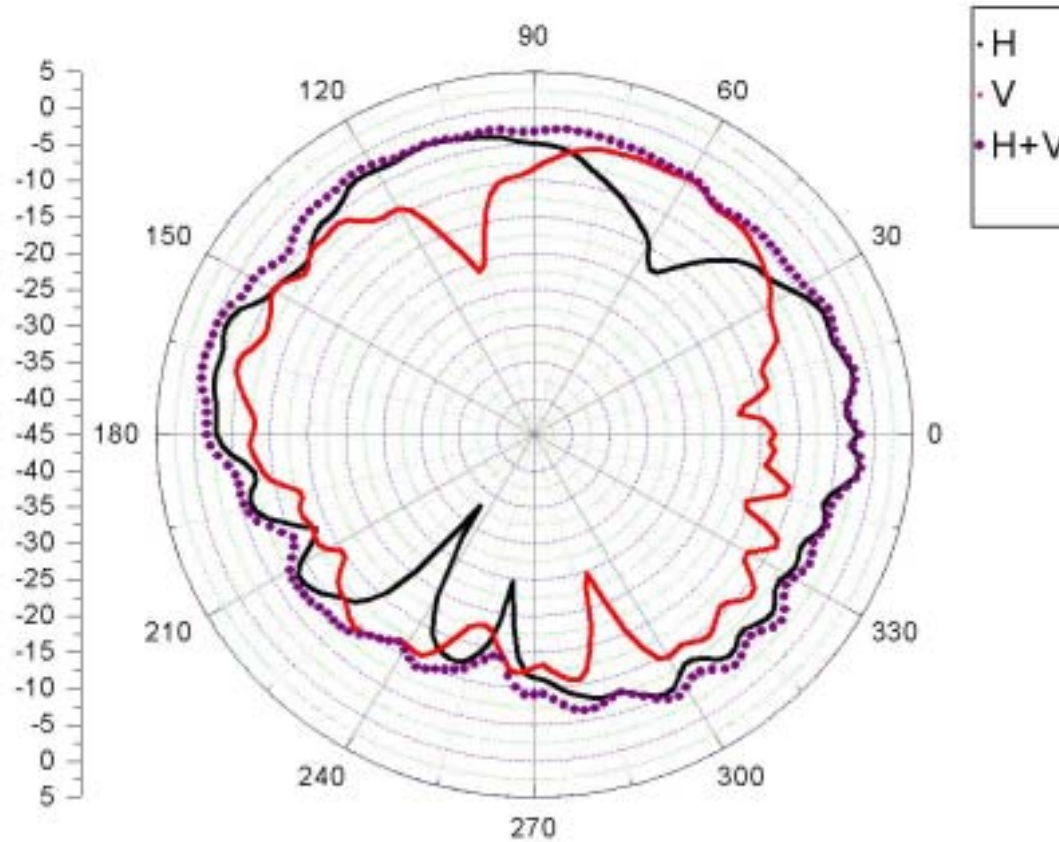

Center Frequency	5825 MHz
Horizontal peak gain (dBi)	-1.29
Vertical peak gain (dBi)	-3.81
Horz +Vert peak gain(dBi)	-0.87