

FCC PART 15, SUBPART B and C
TEST REPORT

for

INTEL MINI PCI TYPE 3A 802.11 BG
WIRELESS LAN ADAPTER
FOR USE IN THE DELL LAPTOP
AGENCY SERIES NUMBER: PP17L

MODEL: WM3A2200BG

Prepared for

DELL COMPUTER CORPORATION
ONE DELL WAY
ROUND ROCK, TEXAS 78682

Prepared by: _____

KYLE FUJIMOTO

Approved by: _____

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: APRIL 7, 2005

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	22	2	2	2	17	109	154

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration - EMI	9
4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment for Brea Facility – Part 1	12
5.3 EMI Test Equipment for Brea Facility – Part 2	13
6. TEST SITE DESCRIPTION	14
6.1 Test Facility Description	14
6.2 EUT Mounting, Bonding and Grounding	14
7. CHARACTERISTICS OF THE TRANSMITTER	15
7.1 Antenna Gain	15
8. TEST PROCEDURES	16
8.1 RF Emissions	16
8.1.1 Conducted Emissions Test	16
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	17
8.2 6 dB and 20 dB Bandwidth	19
8.3 Peak Output Power	19
8.4 RF Antenna Conducted Test	19
8.5 Spectral Density Output	20
8.6 RF Band Edges	21
9. CONCLUSIONS	22

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none"> • Test Setup Diagrams • Radiated and Conducted Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map and Layout of 3 Meter Radiated Site

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST, or any other agency of the U.S. Government.

Device Tested: Intel Mini PCI Type 3A 802.11 BG Wireless LAN Adapter
for use in the Dell Laptop Agency Series Number: PP17L
Model: WM3A2200BG
S/N: N/A

Product Description: The product is a wireless Mini PCI card used for the Dell Laptop Agency Series Number: PP17L.

Modifications: The EUT was not modified during the testing.

Manufacturer: Dell Computer Corporation
One Dell Way
Round Rock, Texas 78682

Test Dates: March 7, 8, and 9, 2005

Test Specifications: EMI requirements
Limits: **Class B** of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247

Test Procedure: ANSI C63.4: 2003

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.207
2	Spurious Radiated RF Emissions, 30 MHz – 1000 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.209
3	Spurious Radiated RF Emissions, 10 kHz – 30 MHz and 1000 MHz – 25000 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, section 15.247(d)
4	Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 10 kHz – 25 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d)
5	Emissions produced by the intentional radiator in restricted bands, 10 kHz – 25 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209(a), and section 15.247 (d)
6	6 dB Bandwidth	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(a)(2)
7	Peak Power Output	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(b)(3)
8	RF Conducted Antenna Test	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d)
9	Peak Power Spectral Density Conducted from the Intentional Radiator to the Antenna Port	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (e)

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Intel Mini PCI Type 3A 802.11 BG Wireless LAN Adapter (for use in the Dell Laptop Agency Series Number: PP17L) Model: WM3A2200BG. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2003. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by the **Class B** limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests of the testing described herein were performed at the test facility of Compatible Electronics at the following location:

114 Olinda Drive, Brea, California 92823

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Dell Computer Corporation

Jason Limoges Regulatory Engineer

Compatible Electronics, Inc.

Benigno Chavez	Test Engineer
Kyle Fujimoto	Test Engineer
James Ross	Test Engineer
Michael Christensen	Lab Manager

2.4 Date Test Sample was Received

The test sample was received on March 7, 2005.

2.5 Disposition of the Test Sample

The sample has not been returned to Dell Computer Corporation as of April 7, 2005.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Intel Mini PCI Type 3A 802.11BG Wireless LAN Adapter (for use in the Dell Laptop Agency Series Number: PP17L) Model: WM3A2200BG was directly connected to the laptop's mini PCI port at the bottom of the laptop. The laptop was also connected to the printer, modem, and AC Adapter via its parallel, modem, and power ports, respectively. The EUT was either continuously transmitting or receiving depending on the test being performed. The commands for the EUT were programmed using the special test software provided.

Note: For all tests, the main antenna port was tested, with the auxiliary antenna port being spot checked to insure the readings were not higher.

The final radiated as well as the conducted data was taken in the mode above. Please see Appendix E for the data sheets.

4.1.1 **Cable Construction and Termination**

Cable 1

This is a 1.5 meter braid and foil shielded cable connecting the laptop to the modem. It has a D-9 pin metallic connector at the laptop end and a D-25 pin metallic connector at the modem end. The cable was bundled to a length of 96 centimeters. The shield of the cable was grounded to the chassis via the connectors.

Cable 2

This is a 1.4 meter braid and foil shielded cable connecting the laptop to the printer. It has a Centronics metallic type connector at the printer end and a D-25 pin metallic connector at the laptop end. The cable was bundled to a length of 75 centimeters. The shield of the cable was grounded to the chassis via the connectors.

Cable 3

This is a 1.7 meter unshielded cable connecting the laptop to the AC Adapter. It has a 5.5 mm power connector at the laptop end and is hard wired into the laptop. The cable was bundled to a length of 1.1 meters. The cable had a molded ferrite at the laptop end.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
Equipment Name				
Intel Mini PCI Type 3A 802.11 BG Wireless LAN Adapter (EUT)	INTEL CORPORATION	WM3A2200BG	N/A	E2K24GBRL
EUT Sub-Assemblies				
Main Antenna	PHYCOMP	DELL P/N: DQ601250112	N/A	N/A
Auxiliary Antenna	PHYCOMP	DELL P/N: DQ601250112	N/A	N/A
Host Equipment List				
Laptop	DELL COMPUTER CORPORATION	PP17L	N/A	DoC
Printer	CITIZEN	LSP-10	118439-72	DLK66TLSP-10
Modem	HAYES	231AA	A07031003480	BFJ9D9231AA



5.2 EMI Test Equipment for Brea Facility – Part 1

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Radiated Emissions Manual Test – Radiated	Compatible Electronics	N/A	N/A	N/A	N/A
Conducted Emissions Test Program	Compatible Electronics	N/A	N/A	N/A	N/A
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08768	June 24, 2004	June 24, 2005
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	3701A22262	June 24, 2004	June 24, 2005
Quasi-Peak Adapter	Hewlett Packard	85650A	2811A01363	June 24, 2004	June 24, 2005
Microwave Preamplifier	Com-Power	PA-122	25196	February 3, 2005	February 3, 2006
Biconical Antenna	Com Power	AB-900	15250	March 12, 2004	March 12, 2005
Log Periodic Antenna	Com Power	AL-100	16060	September 27, 2004	Sept. 27, 2005
Computer	Hewlett Packard	D5251A 888	US74458128	N/A	N/A
Monitor	Hewlett Packard	D5258A	DK74889705	N/A	N/A
LISN	Com Power	LI-215	12090	October 26, 2004	Oct. 26, 2005
LISN	Com Power	LI-215	12076	October 26, 2004	Oct. 26, 2005
Transient Limiter	Seaward	252A910	K39-0220	September 20, 2004	Sept. 20, 2005

5.3 EMI Test Equipment for Brea Facility – Part 2

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
EMI Receiver	Rohde & Schwarz	ESIB40	100172	October 28, 2004	Oct. 28, 2005
Loop Antenna	Com-Power	AL-130	17089	September 3, 2004	Sept. 3, 2005
Horn Antenna	Com-Power	AH826	0071957	November 5, 2003	Nov. 5, 2005
Horn Antenna	Antenna Research	DRG-118/A	1053	January 16, 2004	Jan. 16, 2006
Microwave Preamplifier	Com Power	PA-122	25195	February 25, 2005	Feb. 25, 2006
Microwave Preamplifier	Com Power	PA-840	711013	February 25, 2005	Feb. 25, 2006
RF Peak Power Meter / Analyzer	Boonton Electronics Corp.	4500A-01-30	1282	February 23, 2004	Feb. 23, 2006
Peak Power Sensor	Boonton Electronics Corp.	57318	3723	February 23, 2004	Feb. 23, 2006
RF Attenuator	Weinschel Corporation	2	BJ6396	August 12, 2004	August 12, 2005

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Antenna Gain

The antenna gain is 1.16 dBi.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2003. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.207 for conducted emissions.

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-103 was used for frequencies from 30 MHz to 1 GHz, the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies from 1 GHz to 18 GHz, and the Com Power Microwave Preamplifier Model: PA-840 was used for frequencies from 18 GHz to 25 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI Receiver records the highest measured reading over all the sweeps.

The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the EMI Receiver to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna


The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

Radiated Emissions (Spurious and Harmonics) Test (con't)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final data.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247 (d). Please see the data sheets located in Appendix E.

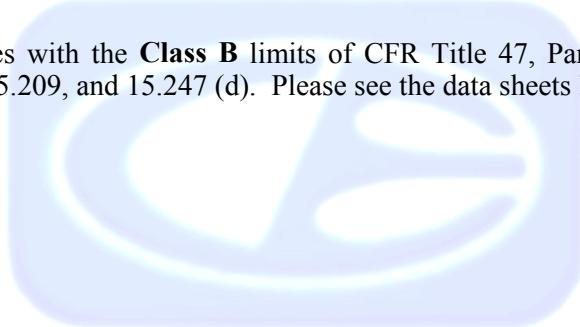

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

8.2 6 dB and 20 dB Bandwidth

The 6 dB and 20 dB bandwidths were measured using the EMI Receiver. The bandwidth was measured using a direct connection from the RF out on the EUT. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz.

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (a)(2).

8.3 Peak Output Power

The Peak Output Power was measured using the power meter and power sensor. The EUT was directly connected to the power sensor, which was directly connected to the power meter. The Peak Output Power was then measured

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (b)(3).

8.4 RF Antenna Conducted Test

The RF antenna conducted test was performed using the EMI Receiver. The RF antenna conducted test was measured using a direct connection from the RF out on the EUT into the input of the analyzer. The resolution bandwidth was 100 kHz, and the video bandwidth 300 kHz. The spans were wide enough to include all the harmonics and emissions that were produced by the intentional radiator.

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (d).

8.5 Spectral Density Output

The spectral density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The resolution bandwidth was 3 kHz, and the video bandwidth was 10 kHz. The highest 1.5 MHz of the signal was used as the frequency span with the sweep rate being 1 second for every 3 kHz of span.

Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (e).



8.6**RF Band Edges**

The RF band edges were measured at the start of the restricted bands (2390 MHz and 2483.5 MHz). The readings taken were also averaged by the EMI Receiver. Data sheets are included in Appendix E, which compares the reading from the EMI Receiver to the spec limit.

Readings that were taken using the Marker Delta Method were derived as follows:

1. Set the EUT to transmit on the highest operating frequency near the edge of the restricted band. Set the EMI Receiver sweep to the edge of the restricted band and set the span wide enough to encompass the fundamental signal and the edge of the restricted band.
2. Make a radiated emissions measurement of the fundamental at 3 meters on the OATS. Maximize the level of the emission. Using MAX HOLD and Peak Search, record the highest peak and average level. (Peak: RBW = VBW = 1 MHz; AVG: RBW = 1 MHz, VBW = 10 Hz)
3. Connect a coax cable to the antenna output of the EUT and measure directly to the EMI Receiver. Use the same center frequency and span settings that were used for steps #1 and #2. Reduce the RBW to 100 kHz (this has been specified for band edge 2.4 GHz 15.247, Note: this is about 1% and 1% would probably suffice for most measurements.) Set the VBW = 1 MHz for peak, 10 Hz for AVG (identical to previous readings). Using MAX HOLD, then "Peak Search" and "Marker Delta" determine the "delta dB" from the peak of the fundamental to the maximum level within the restricted band. This dBc level is the "Delta dB" reading.
4. If the maximum level within the restricted band is within two standard BW (where a "standard" bandwidth is the bandwidth specified by ANSI C63.4: 2001 for the frequency being measured, or 1 MHz for > 1GHz) of the edge of the restricted band, measure the amount that the level of the fundamental dropped when the RBW was changed from 1 MHz to the RBW used in step 2.
5. Calculate the PEAK and Average level within the restricted band in dBuV/m using the equations below:

For readings within two standard bandwidths of the band edge:

Restricted band level (Peak) = Peak reference level – delta dB – BW delta dB (step #4)

Restricted band level (AVG) = Average reference level – delta dB – BW delta dB (step #4)

For readings that are outside the two standard bandwidths of the band edge:

Restricted band level (Peak) = Peak reference level – delta dB

Restricted band level (AVG) = AVG reference level – delta dB

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d). The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz meet the limits of section 15.209. Please see the data sheets located in Appendix E.

9. CONCLUSIONS

The Intel Mini PCI Type 3A 802.11 BG Wireless LAN Adapter (for use in the Dell Laptop Agency Series Number: PP17L) Model: WM3A2200BG meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247.

