

Regulatory WLAN Antenna Information (Example)

(English Language Required for Intel Regulatory Review / Approval)

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.
Remove Intel references and make this your own document)**

Platform	
Platform Owner	
Brand Name	DELL
Model Name	Diaz
ODM	ASUS
Target Launch Date	(YYYY/ MM/ DD)
Antenna	
Brand Name	ACON
Part Number	■ Tx1 Antenna: APP8P-700049
	■ Tx2 Antenna: APP8P-700049
	■ Tx3 (or Rx3) Antenna: APP8P-700049
Module	
With WLAN Module	■ 512AN_HMW
(Check Box)	■ 533AN_HMW

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

NOTE:

(*) if 3rd antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

Antenna Information

Section 1. Antenna Assembly Specifications

Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
APP8P-700049 Tx1 antenna	: ADVANCED-C ONNECTEK INC.	IFA	APP8P-700049 50 ohm Coaxial. length: 542.5 mm diameter: 1.13mm Connector: I-PEX	2400-2500MHz 1.8 dBi (peak)	2400-2500MHz 3.05 dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 1.25 dBi (peak)
				5150-5350MHz -0.1 dBi (peak)	5150-5350MHz 1.77 dBi (peak)	5150-5350MHz 2.0 max	5150-5350MHz 1.87 dBi (peak)
				5470-5725MHz 0 dBi (peak)	5470-5725MHz 1.94 dBi (peak)	5470-5725MHz 2.0 max	5470-5725MHz 1.94 dBi (peak)
				5725-5875MHz -1.4 dBi (peak)	5725-5875MHz 0.71 dBi (peak)	5725-5875MHz 2.0 max	5725-5875MHz 2.11 dBi (peak)
APP8P-700049 Tx2 antenna	ADVANCED-C ONNECTEK INC.	IFA	APP8P-700049 50 ohm Coaxial. length: 504 mm diameter: 1.13mm Connector: I-PEX	2400-2500MHz 2.2 dBi (peak)	2400-2500MHz 3.61 dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 1.41 dBi (peak)
				5150-5350MHz 1.3 dBi (peak)	5150-5350MHz 3.52 dBi (peak)	5150-5350MHz 2.0 max	5150-5350MHz 2.22 dBi (peak)
				5470-5725MHz -0.1 dBi (peak)	5470-5725MHz 2.22 dBi (peak)	5470-5725MHz 2.0 max	5470-5725MHz 2.32 dBi (peak)
				5725-5875MHz -0.1 dBi (peak)	5725-5875MHz 2.33 dBi (peak)	5725-5875MHz 2.0 max	5725-5875MHz 2.43 dBi (peak)
APP8P-700049 Tx3 (or Rx3) antenna	ADVANCED-C ONNECTEK INC.	IFA	AMP8P-700047 50 ohm Coaxial. length: 293 mm diameter: 1.13mm Connector: I-PEX	2400-2500MHz 2.7 dBi (peak) *	2400-2500MHz 3.53 dBi (peak) *	2400-2500MHz 2.0 max	2400-2500MHz 0.83 dBi (peak) *
				5150-5350MHz 2.3 dBi (peak) *	5150-5350MHz 3.48 dBi (peak) *	5150-5350MHz 2.0 max	5150-5350MHz 1.18 dBi (peak) *
				5470-5725MHz 2.3 dBi (peak) *	5470-5725MHz 3.53 dBi (peak) *	5470-5725MHz 2.0 max	5470-5725MHz 1.23 dBi (peak) *
				5725-5875MHz 0.88 dBi (peak) *	5725-5875MHz 2.18 dBi (peak) *	5725-5875MHz 2.0 max	5725-5875MHz 1.30 dBi (peak) *

NOTE:

(*) If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information marked with * is not required

Antenna Peak Gain Table:

	Tx1 antenna		Tx2 Antenna		Tx3 (or Rx3) Antenna	
Frequency (MHz)	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)
2412	1	1.3	0.2	1.6	-1.2	1.9
2437	0.4	1	0	2.2	-0.4	2.7
2462	0.2	1.8	-1.1	0.8	-1	2
5150	-6.4	-0.7	-5.1	-1.9	2.1	-1.8
5350	-3.5	-0.1	-2.9	1.3	2.3	-3.4
5470	-3.9	0	-3.7	-1.2	2.1	1.8
5725	-3.4	-1.4	-3.8	-0.1	2.3	-3.4
5875	-2.5	-2	-3.2	-0.4	2.7	0

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.

Tx1 Antenna Dimensioned Drawing:




[illegible]


Section 3. Radiation characteristics of antennae Loaded in Host Platform

2412-2462MHz radiation characteristic

Tx1 antenna: 2412 MHz

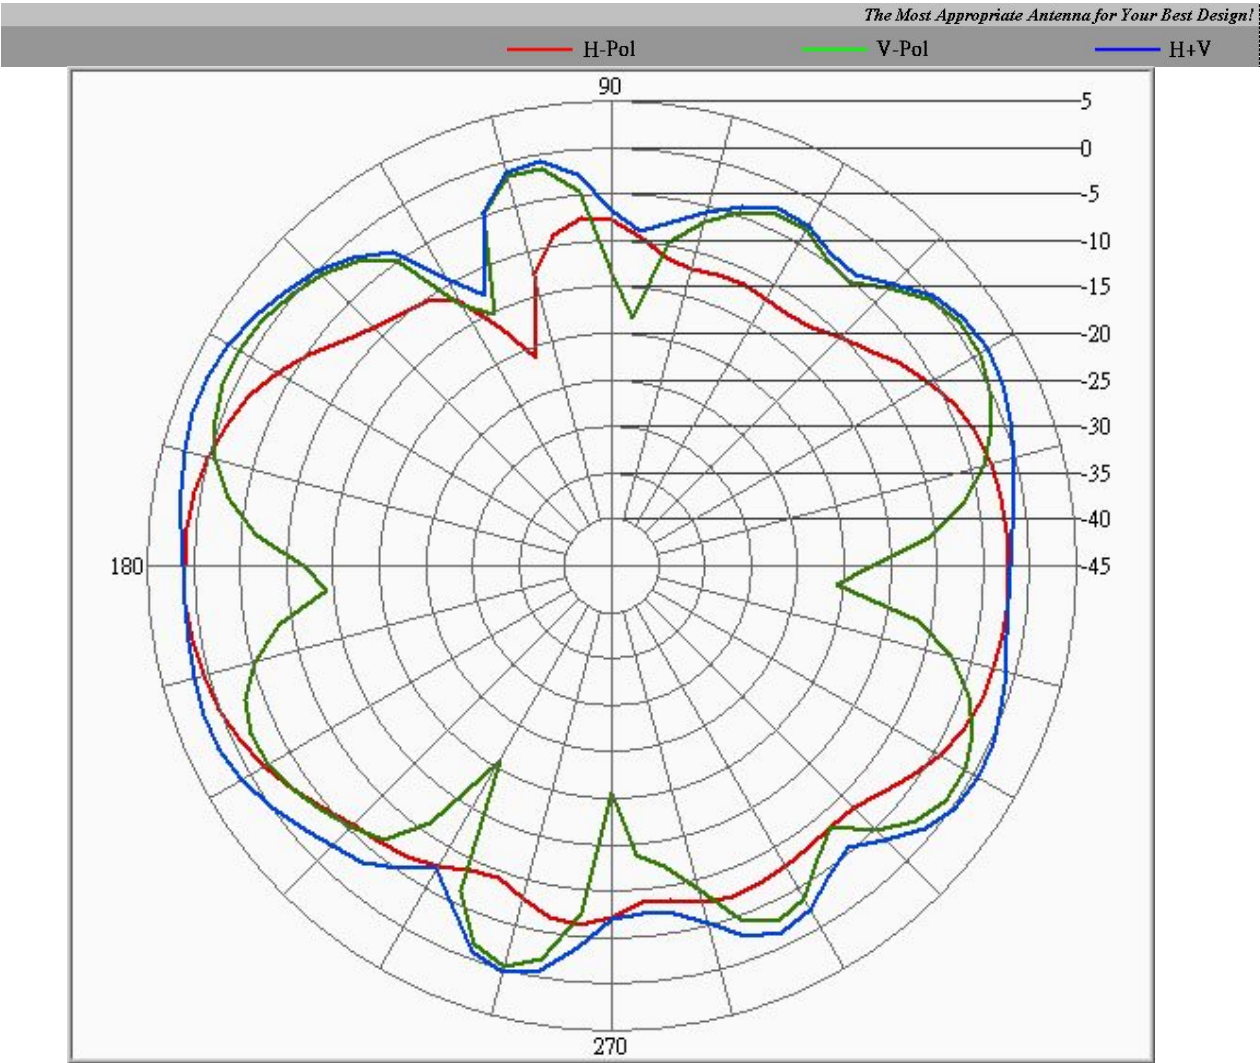


Tx1 antenna: 2437 MHz

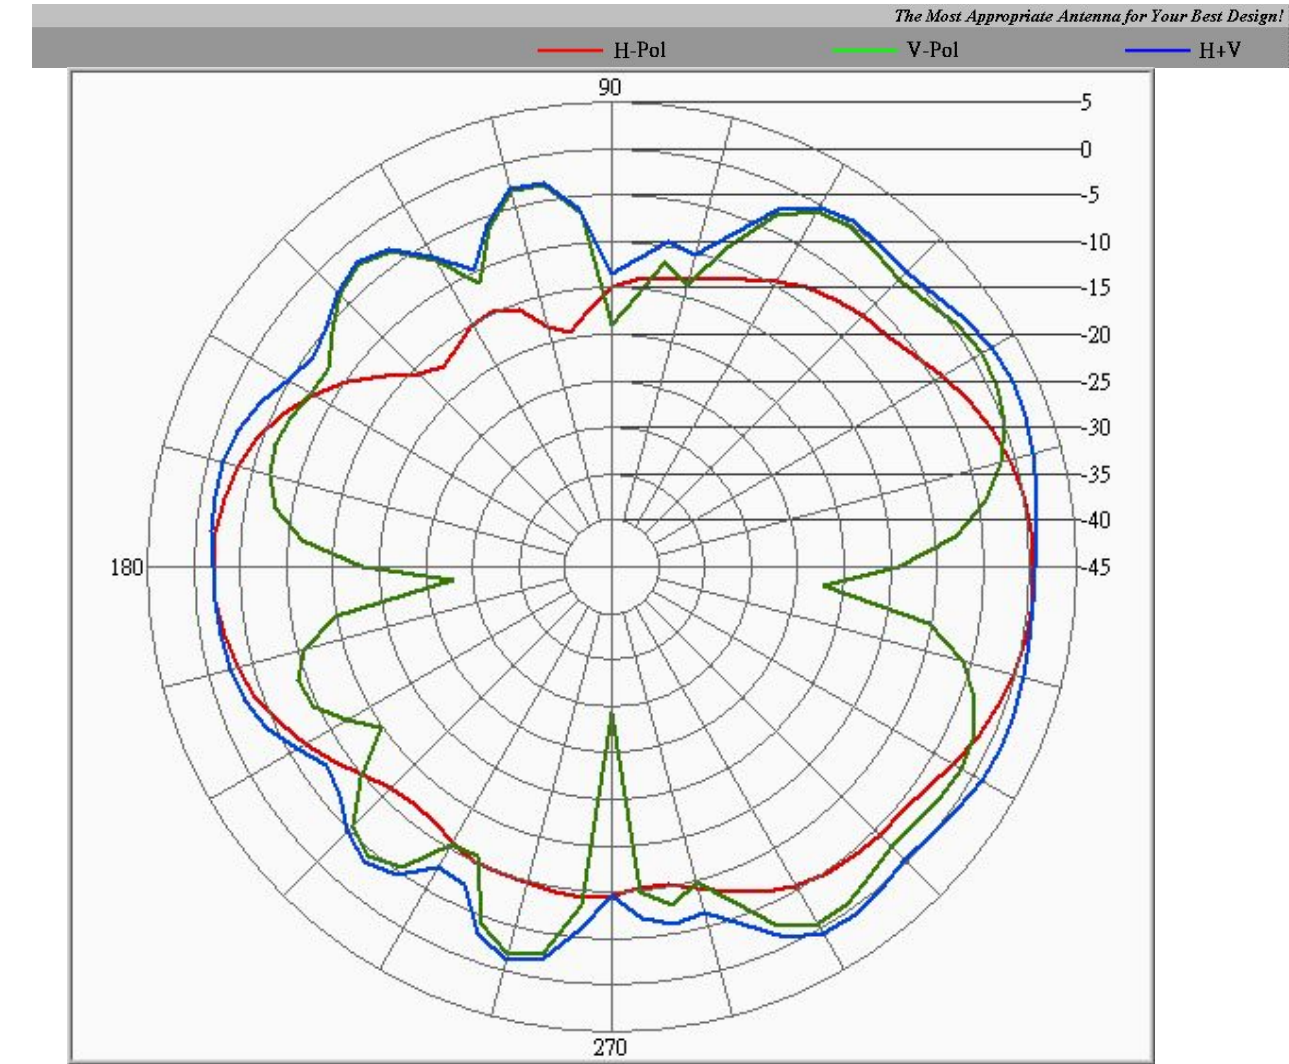


Center Frequency	2437 MHz
Horizontal (dBi) peak	0.4
Vertical (dBi) peak	1


Tx1 antenna: 2462 MHz

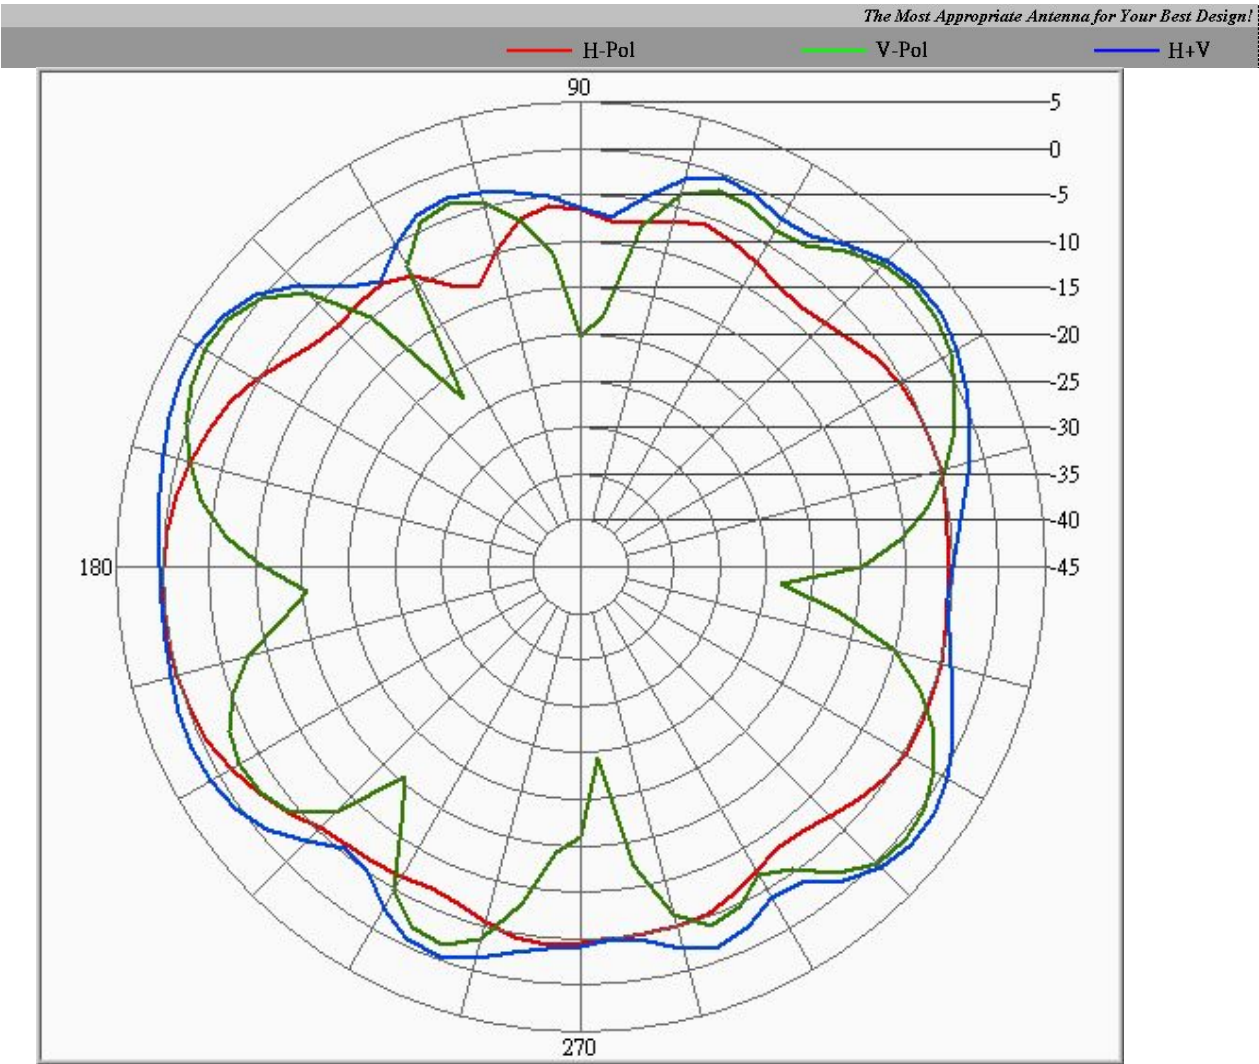

Tx2 antenna: 2412 MHz

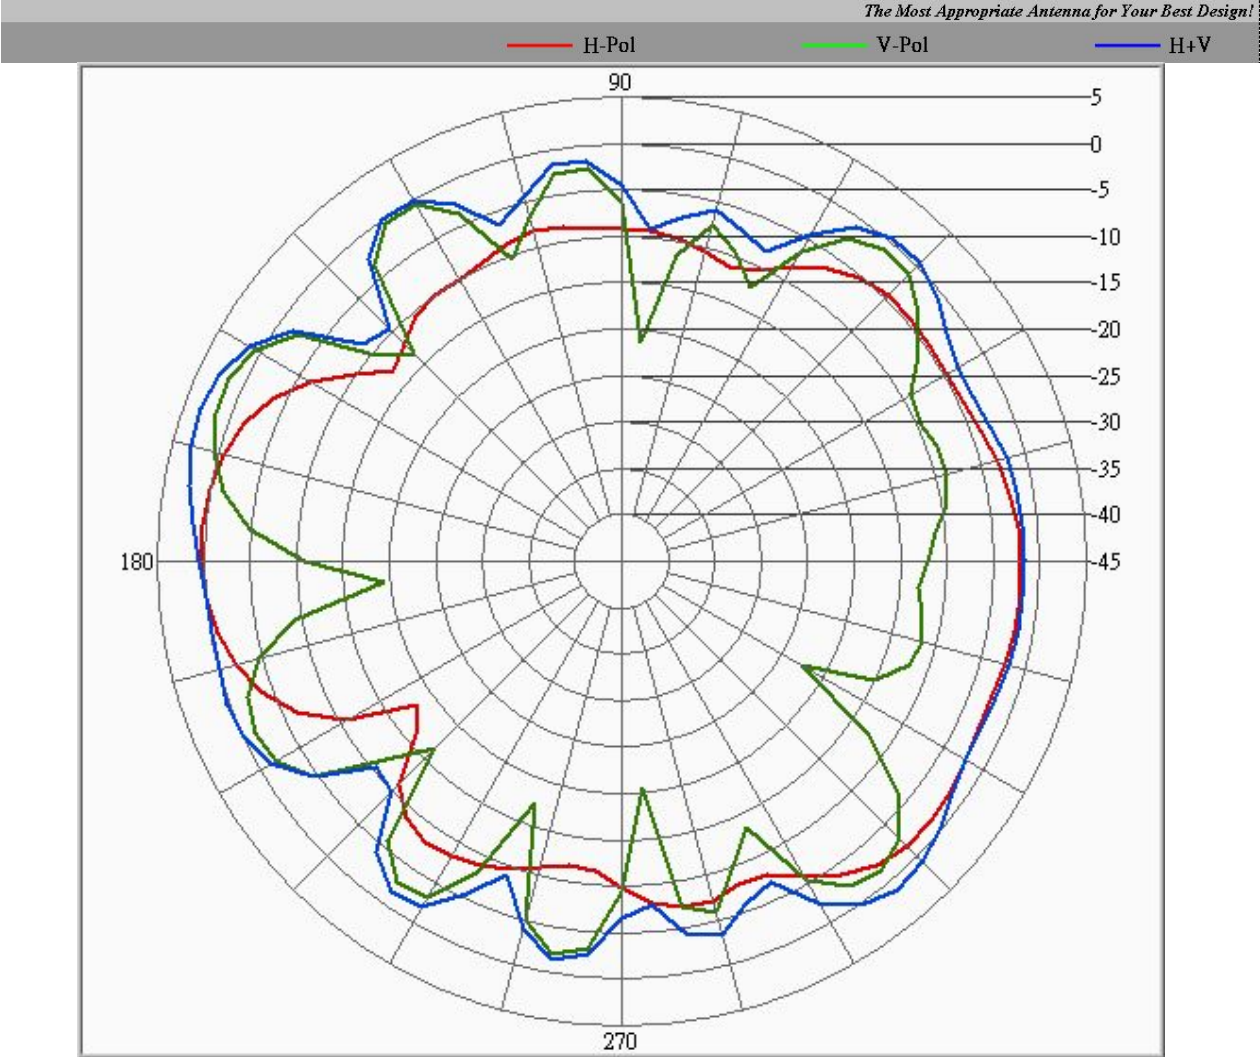


Tx2 antenna: 2437 MHz

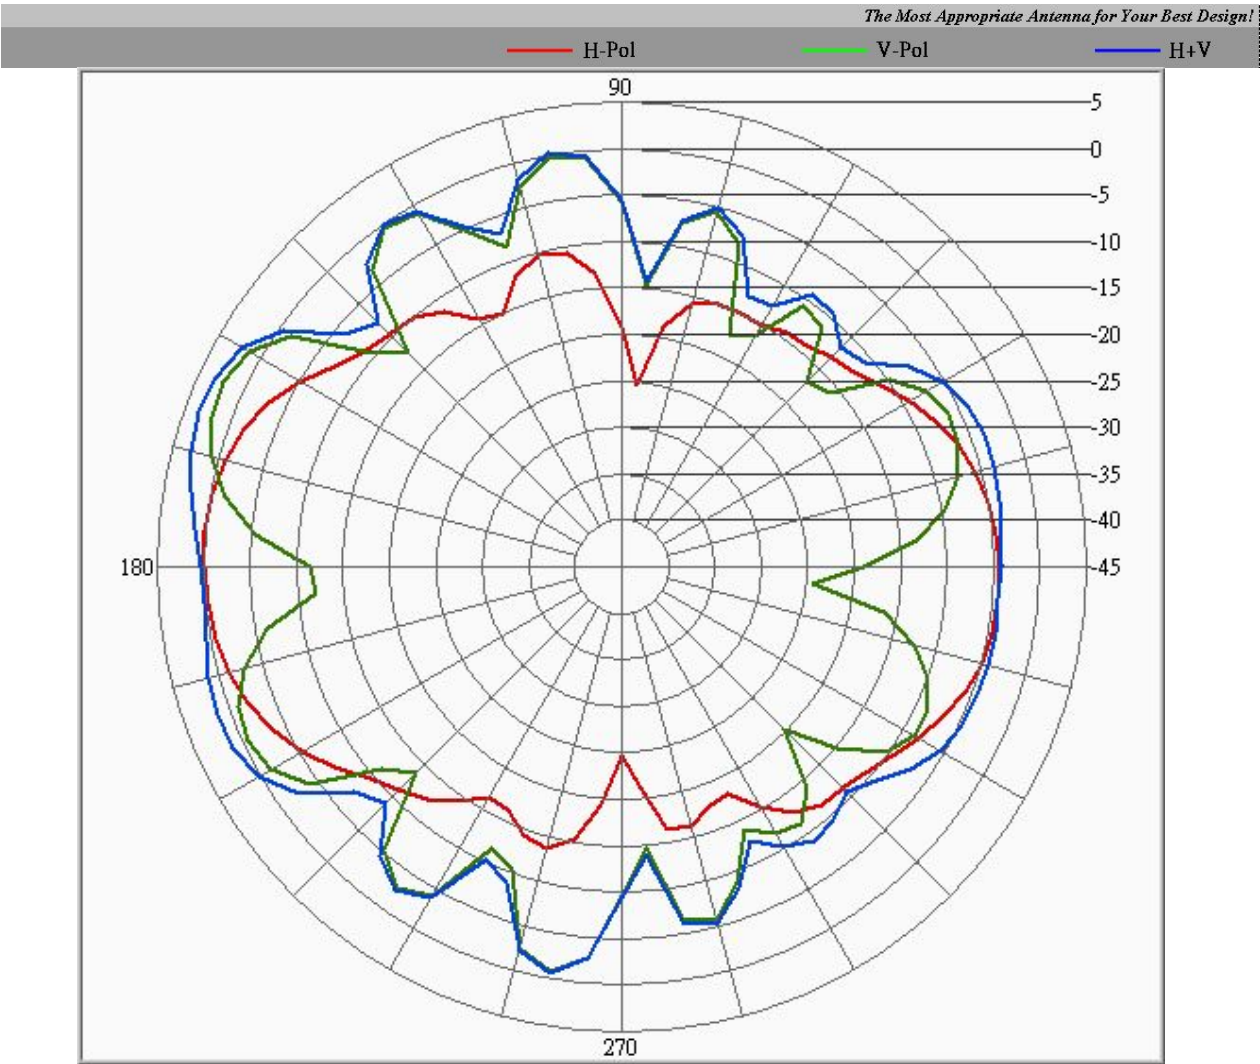


Center Frequency	2437 MHz
Horizontal (dBi) peak	0
Vertical (dBi) peak	2.2


Tx2 antenna: 2462 MHz

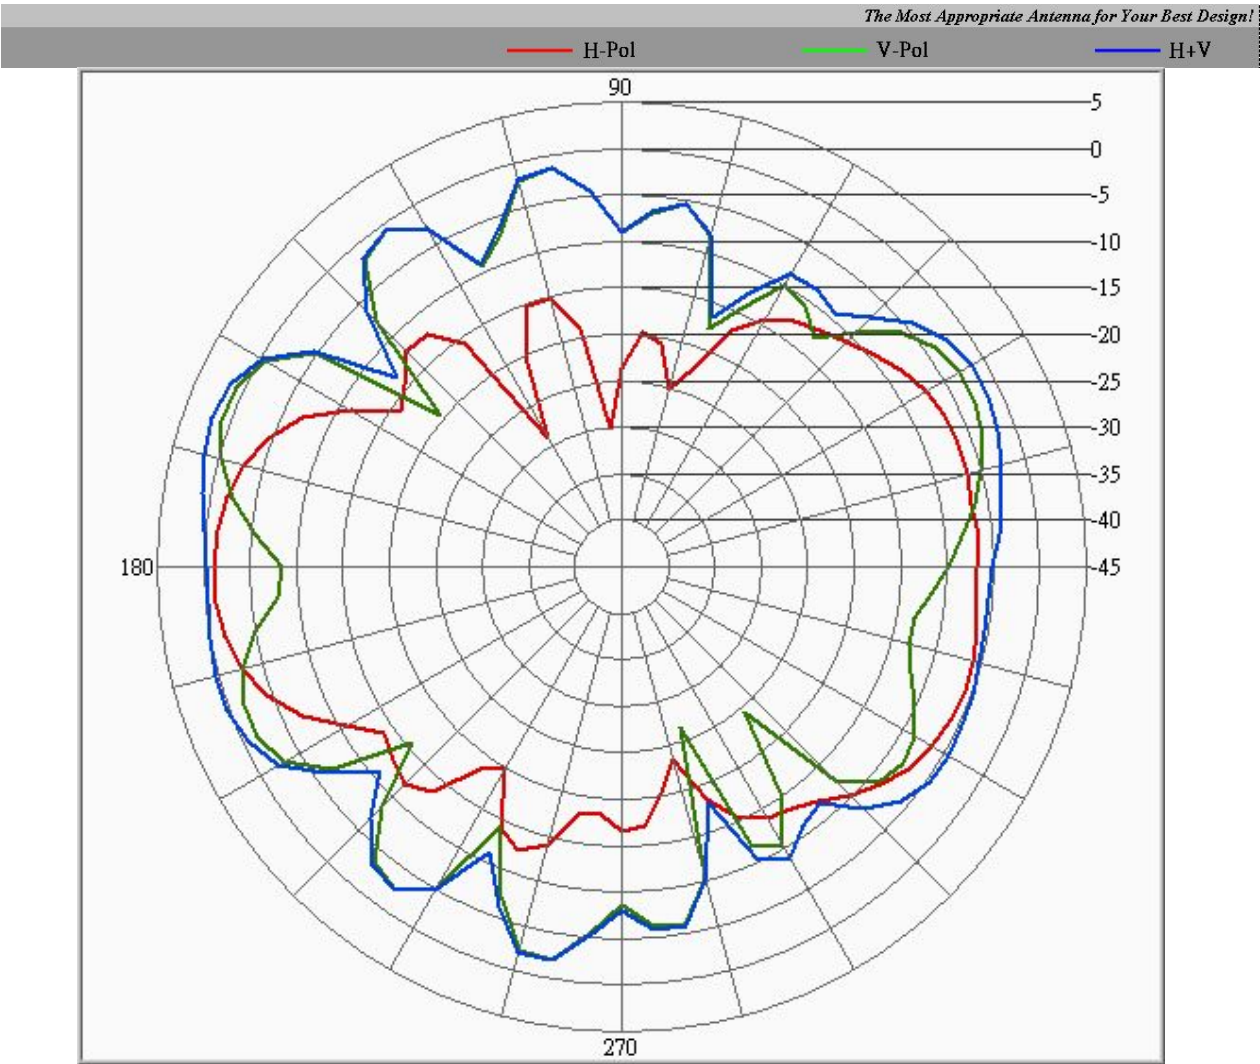


Tx3 (or Rx3) antenna: 2412 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

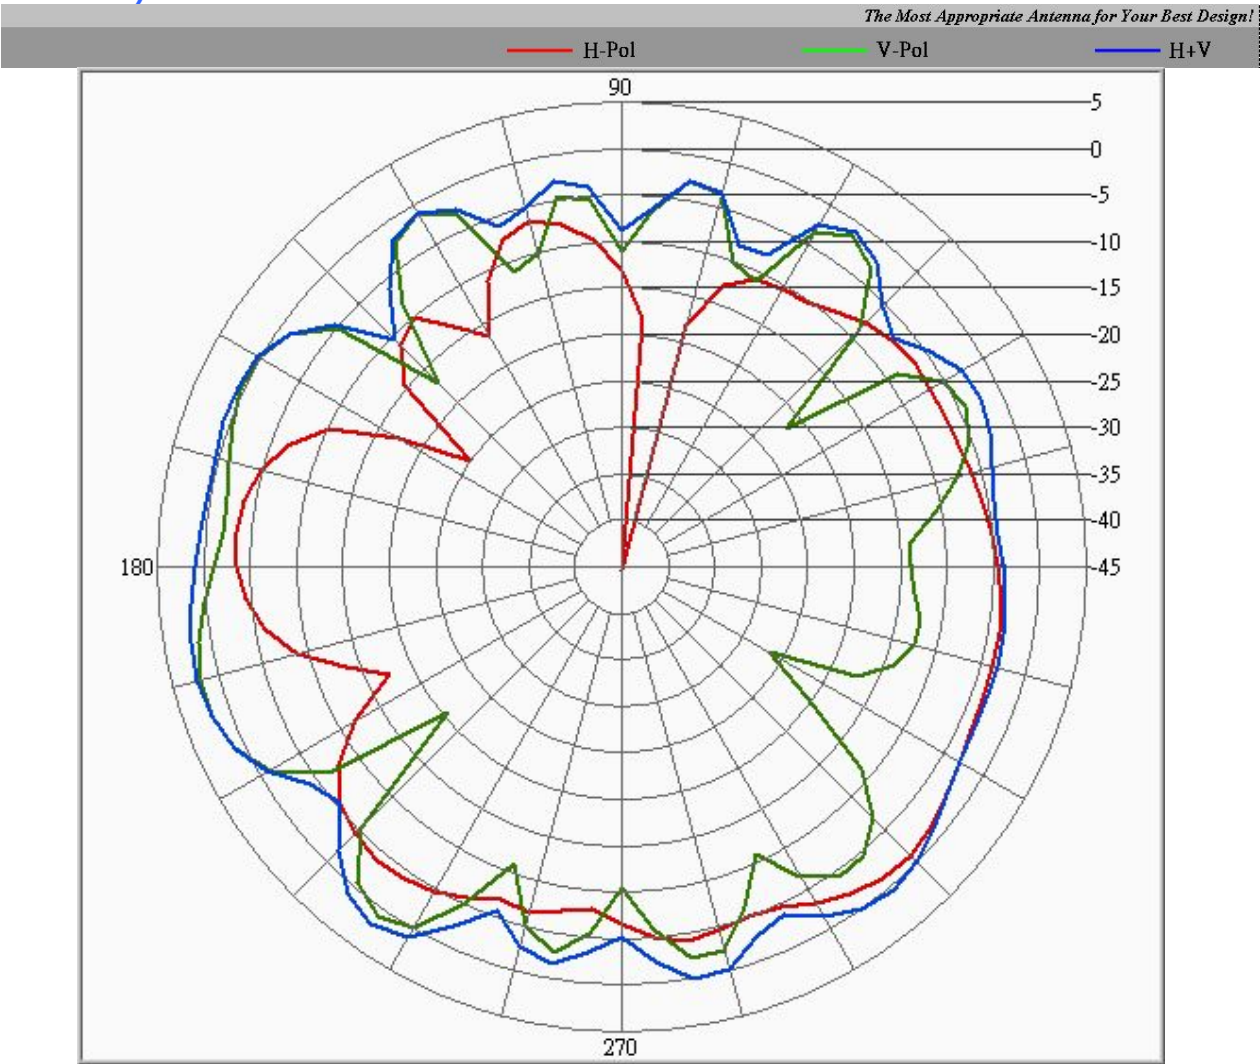


Tx3 (or Rx3) antenna: 2437 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

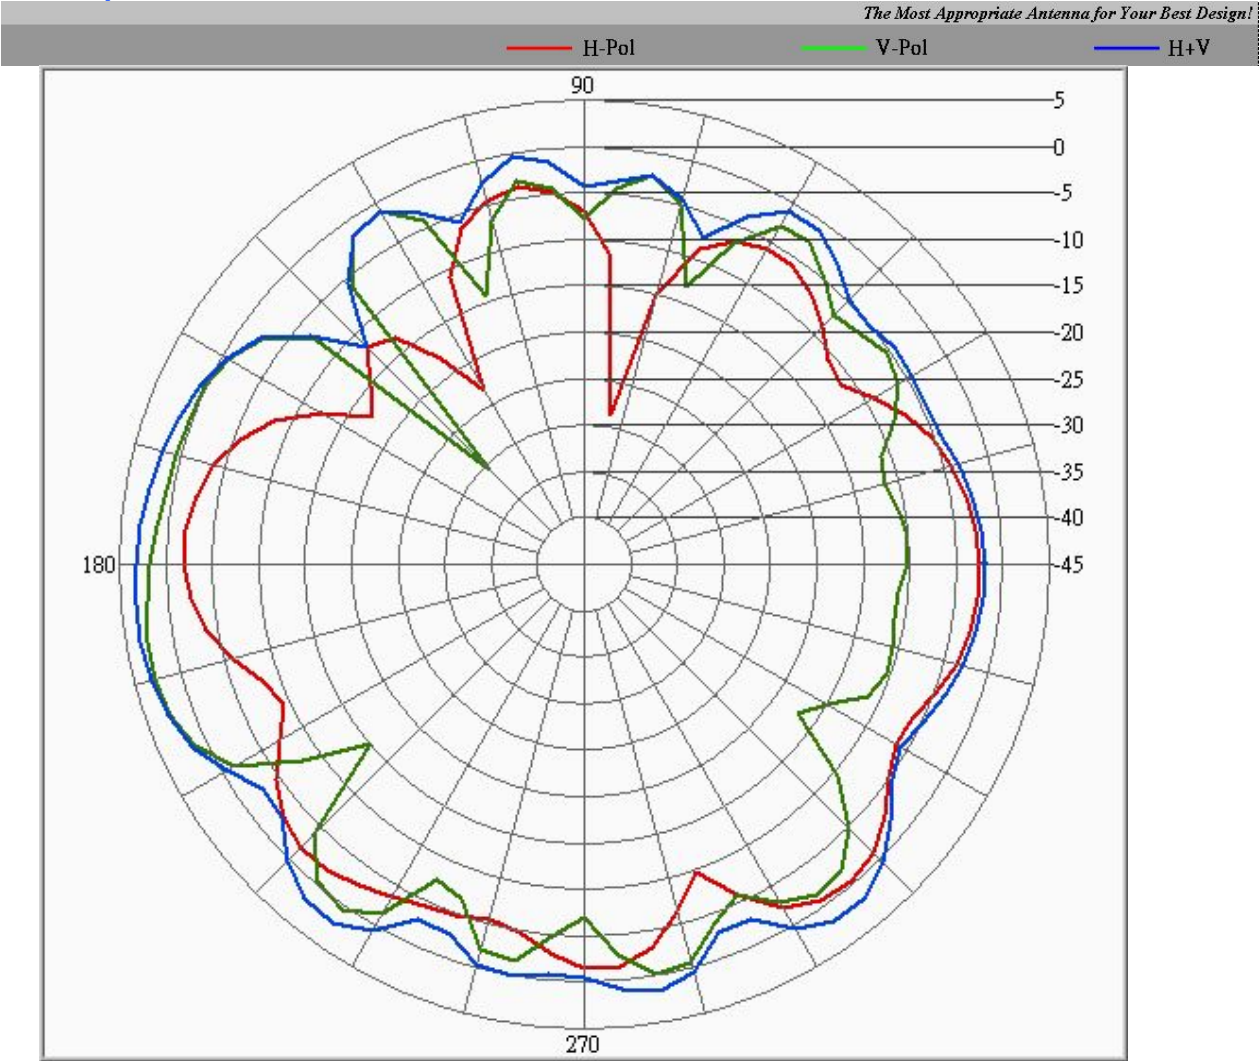


Tx3 (or Rx3) antenna: 2462 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

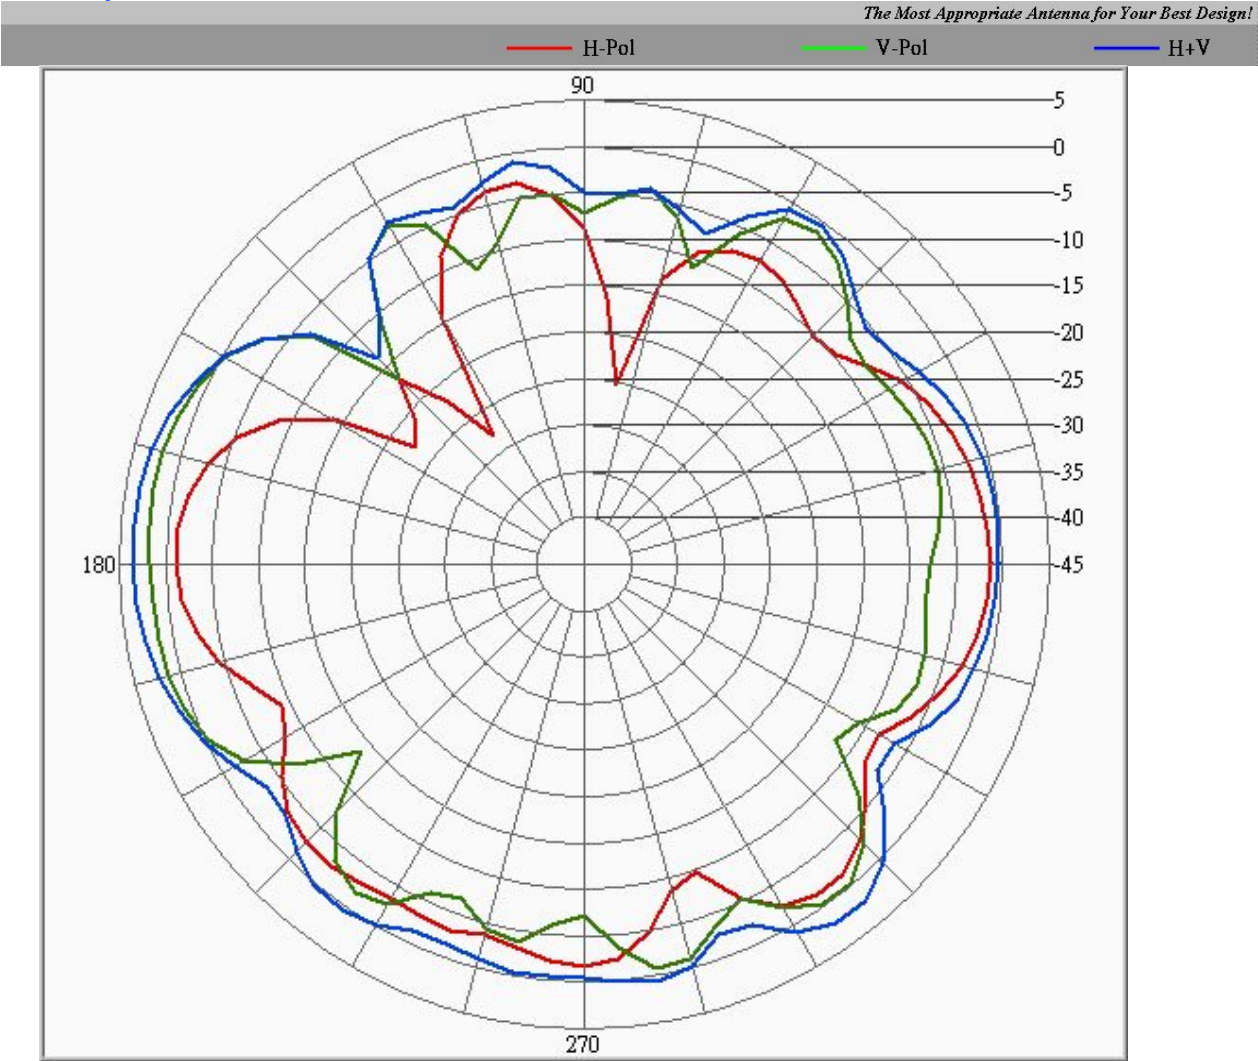


Tx1 antenna: 5150 MHz

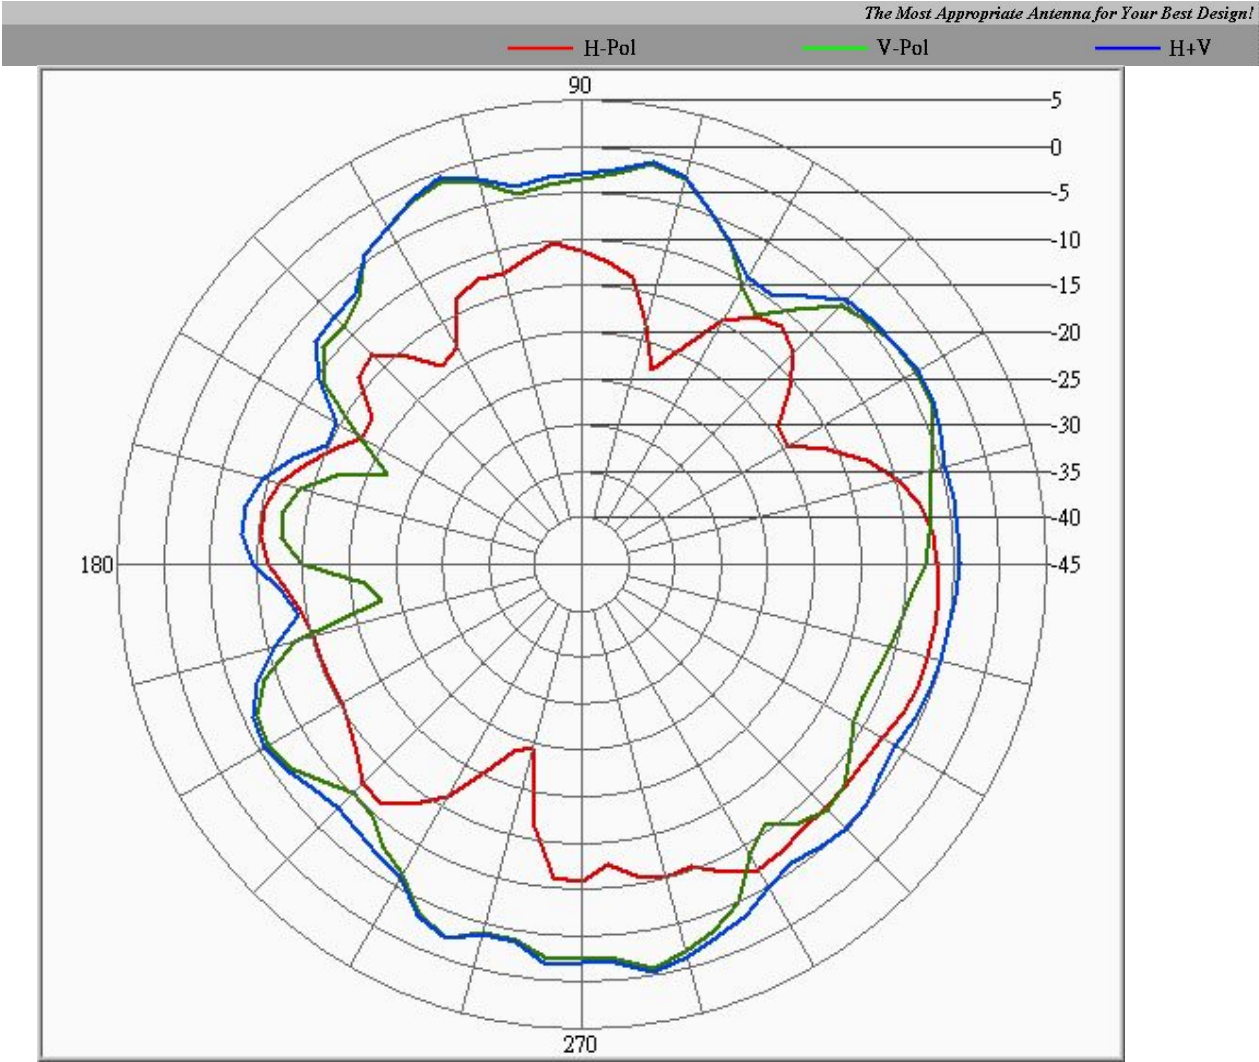


Tx1 antenna: 5350 MHz

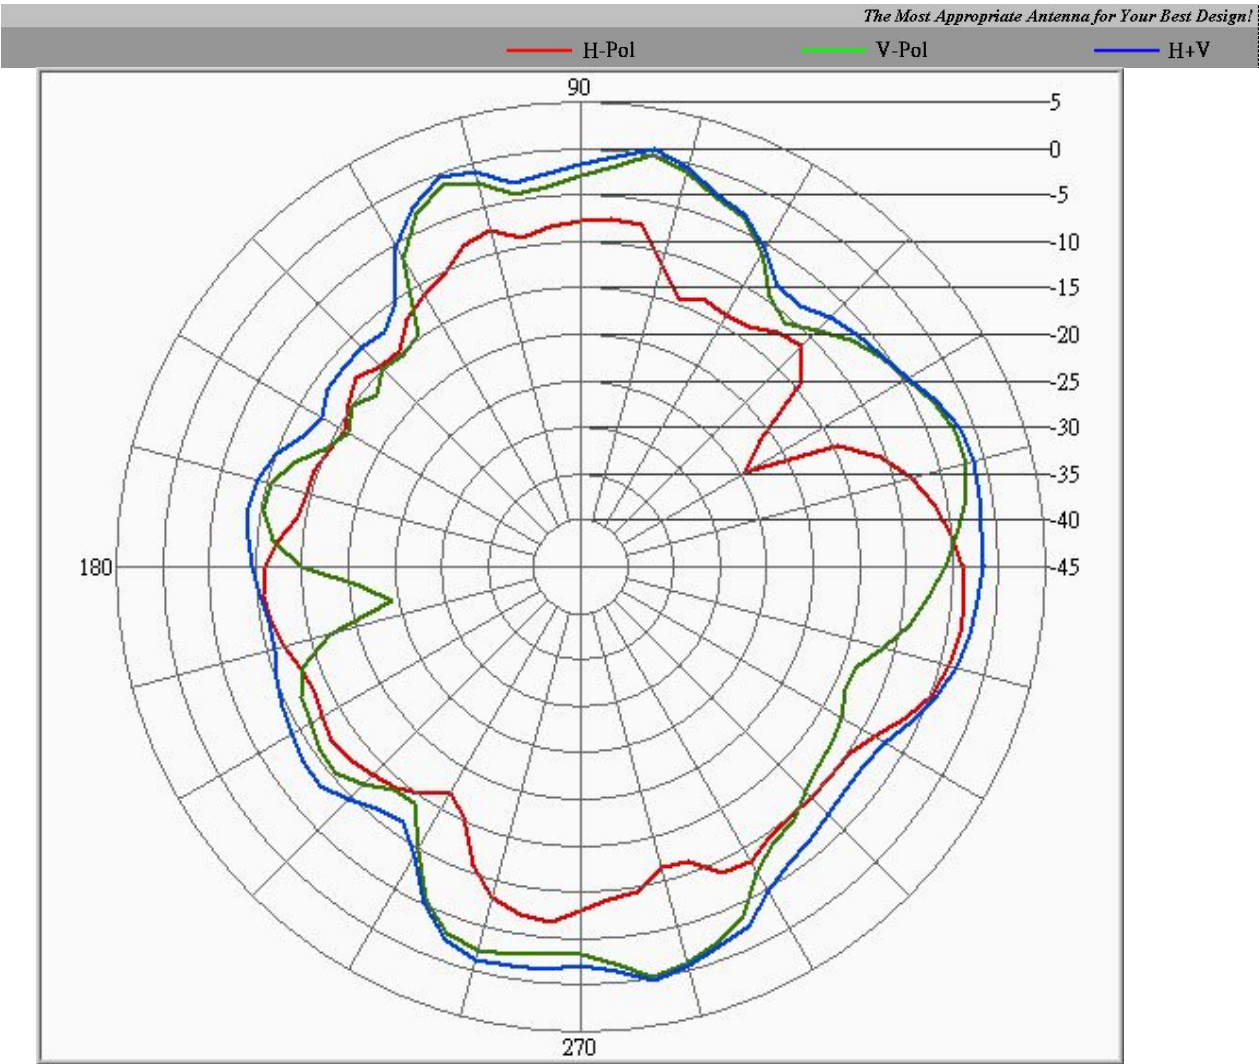

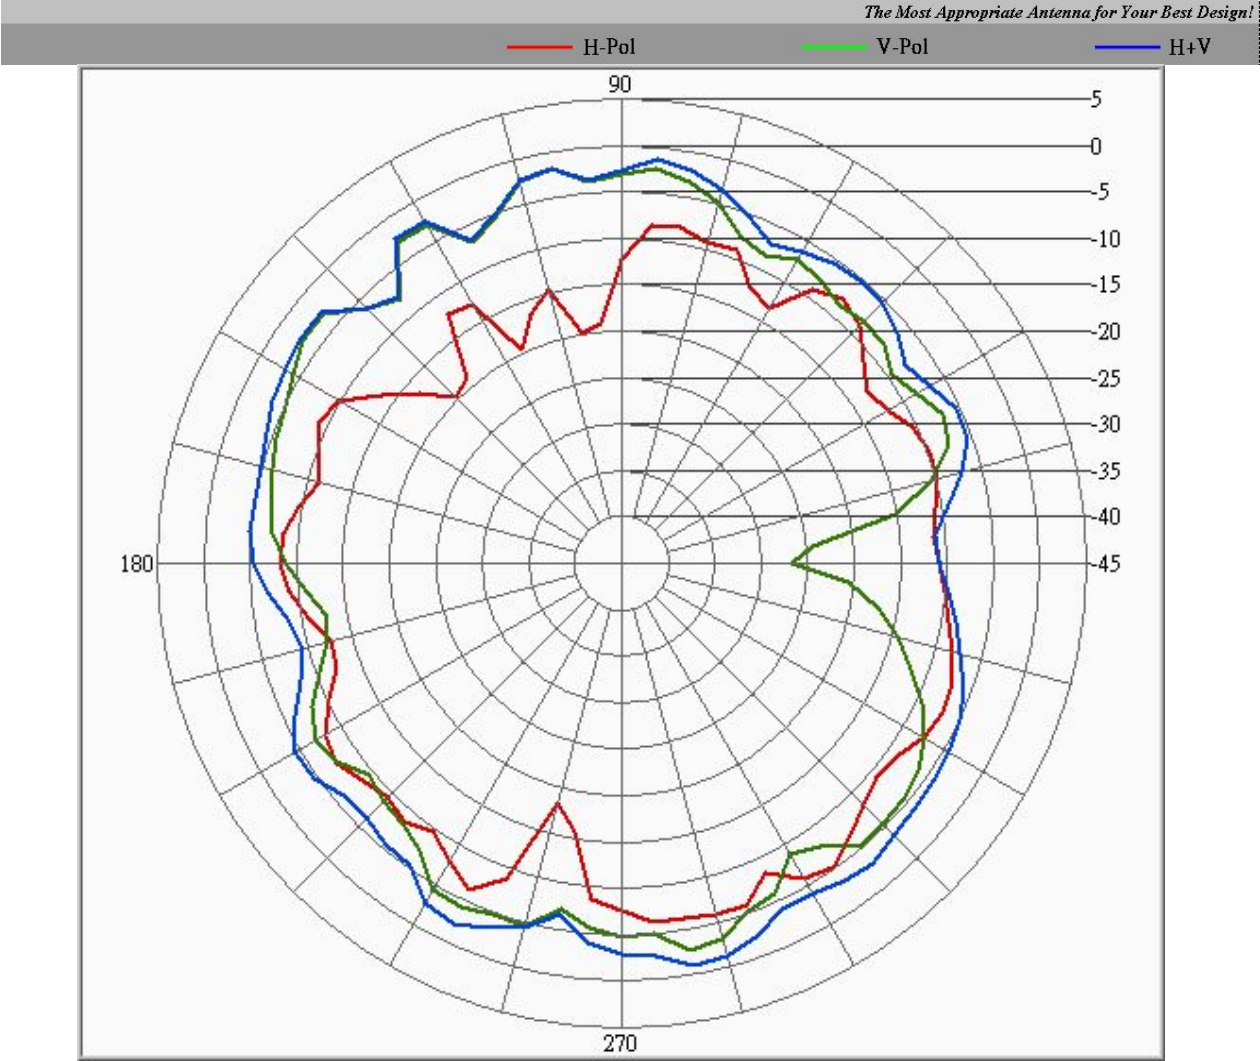


Center Frequency	5150 MHz
Horizontal (dBi) peak	-5.1
Vertical (dBi) peak	-1.9


Tx2 antenna: 5350 MHz

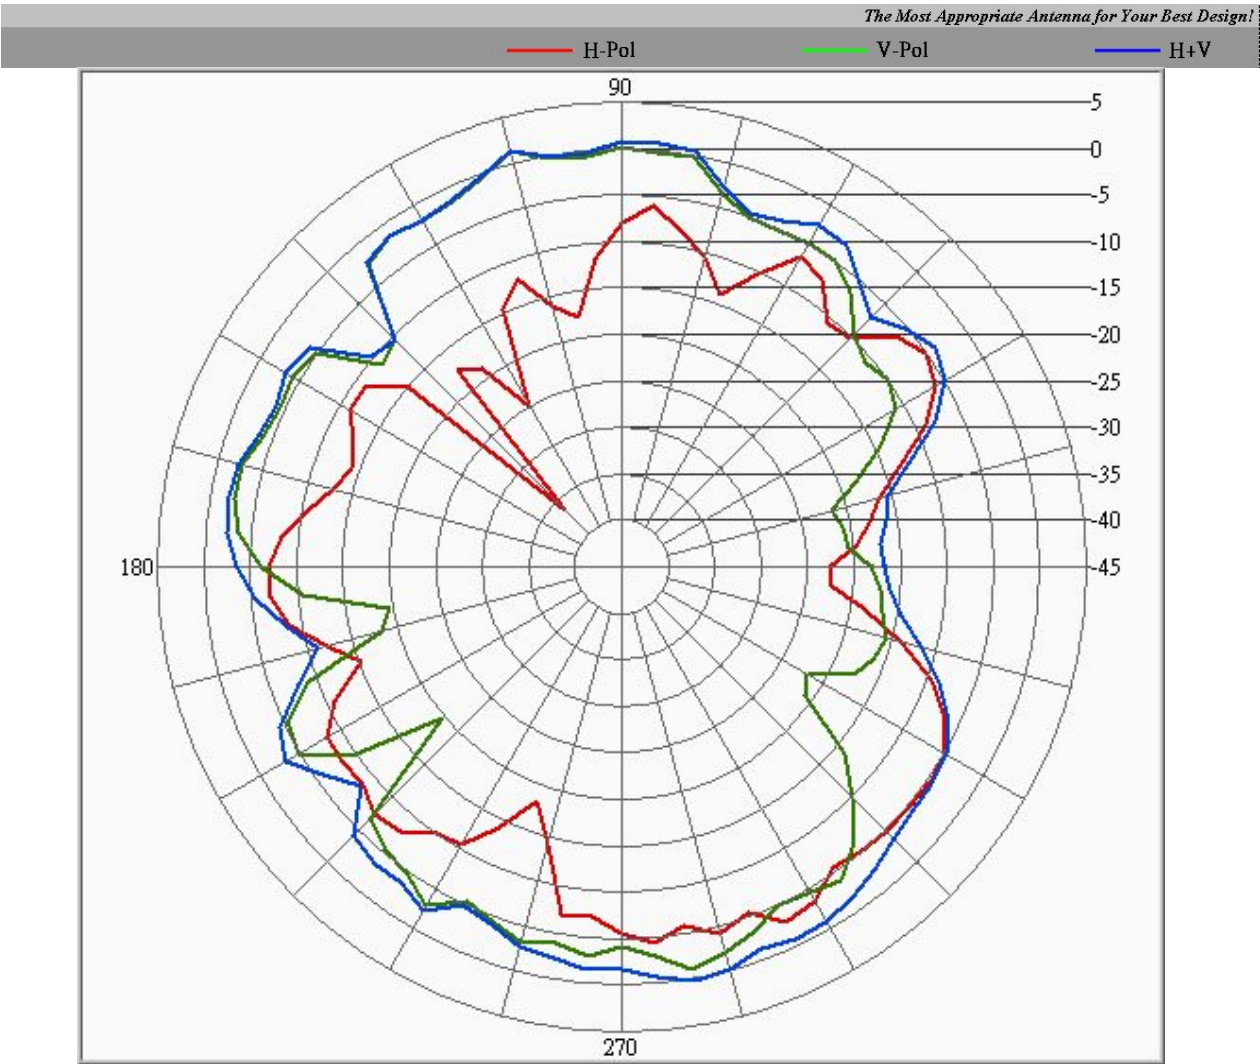

Tx3 (or Rx3) antenna: 5150 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

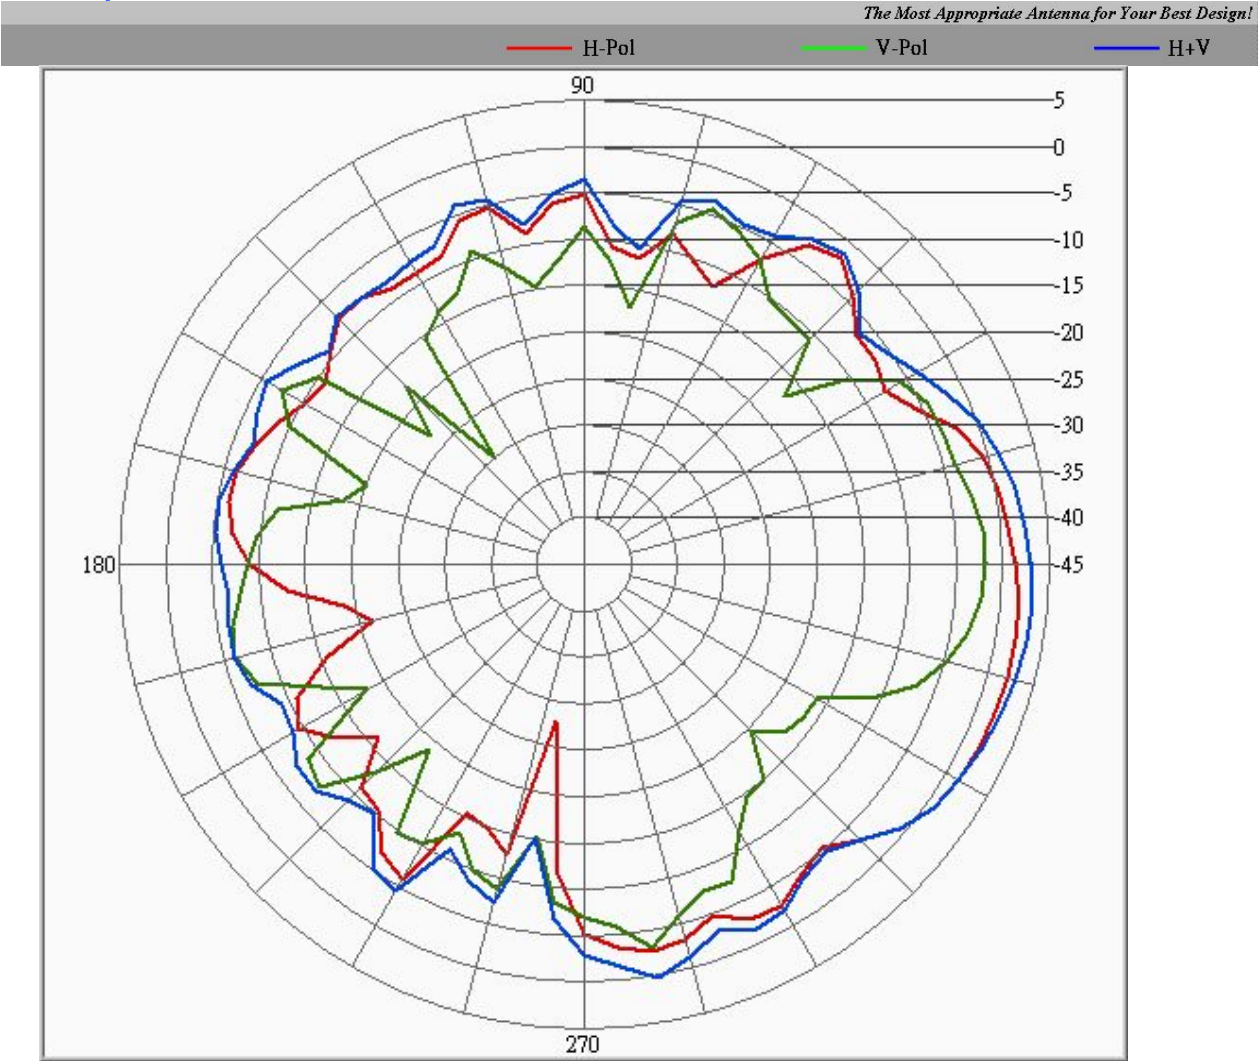


Tx3 (or Rx3) antenna: 5350 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

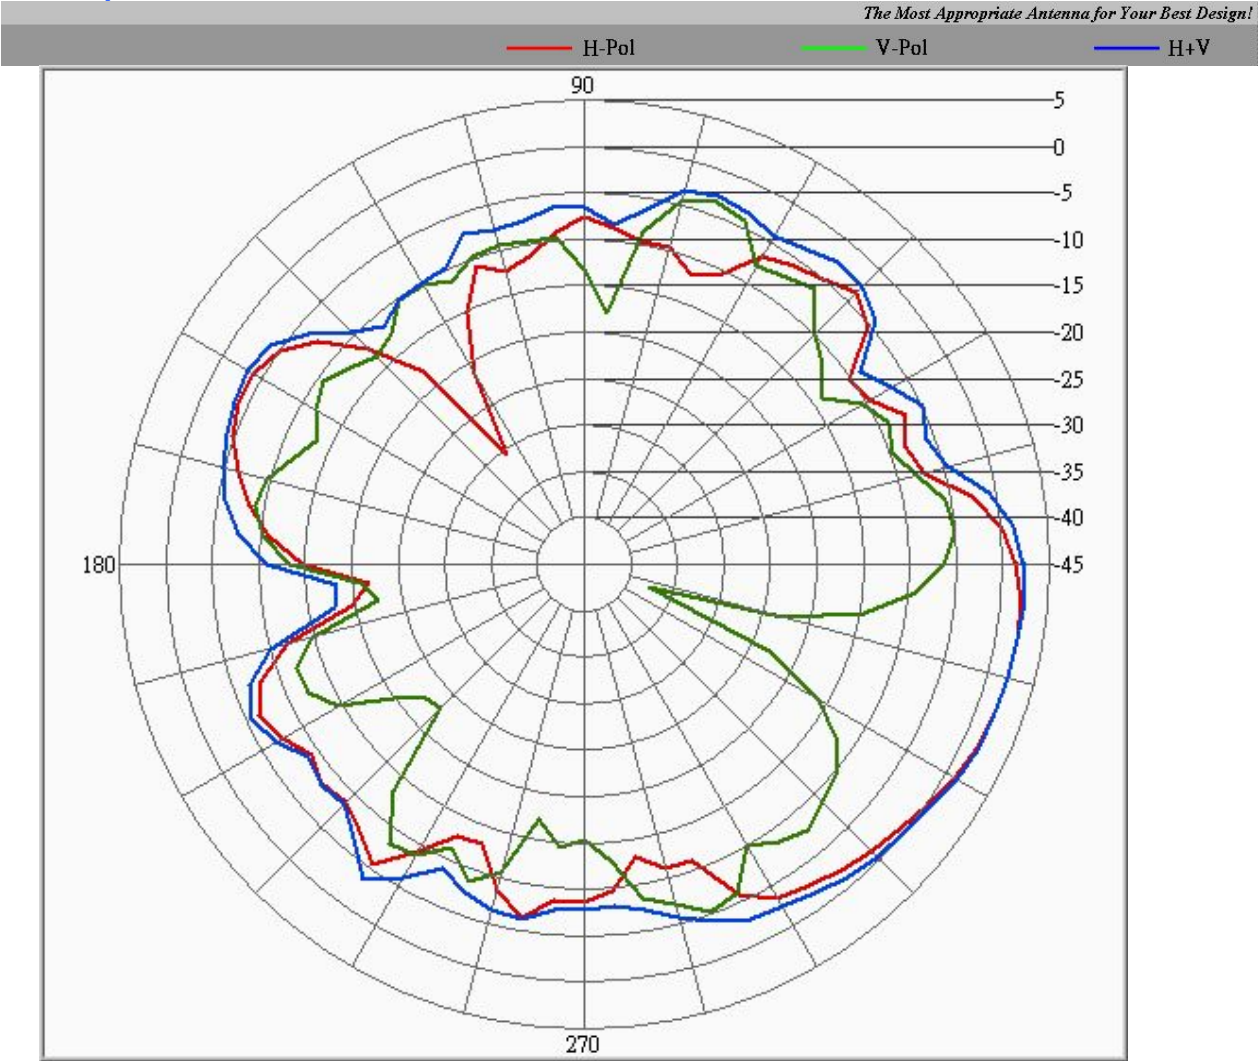


5470-5875MHz radiation characteristic


Tx1 antenna: 5470 MHz

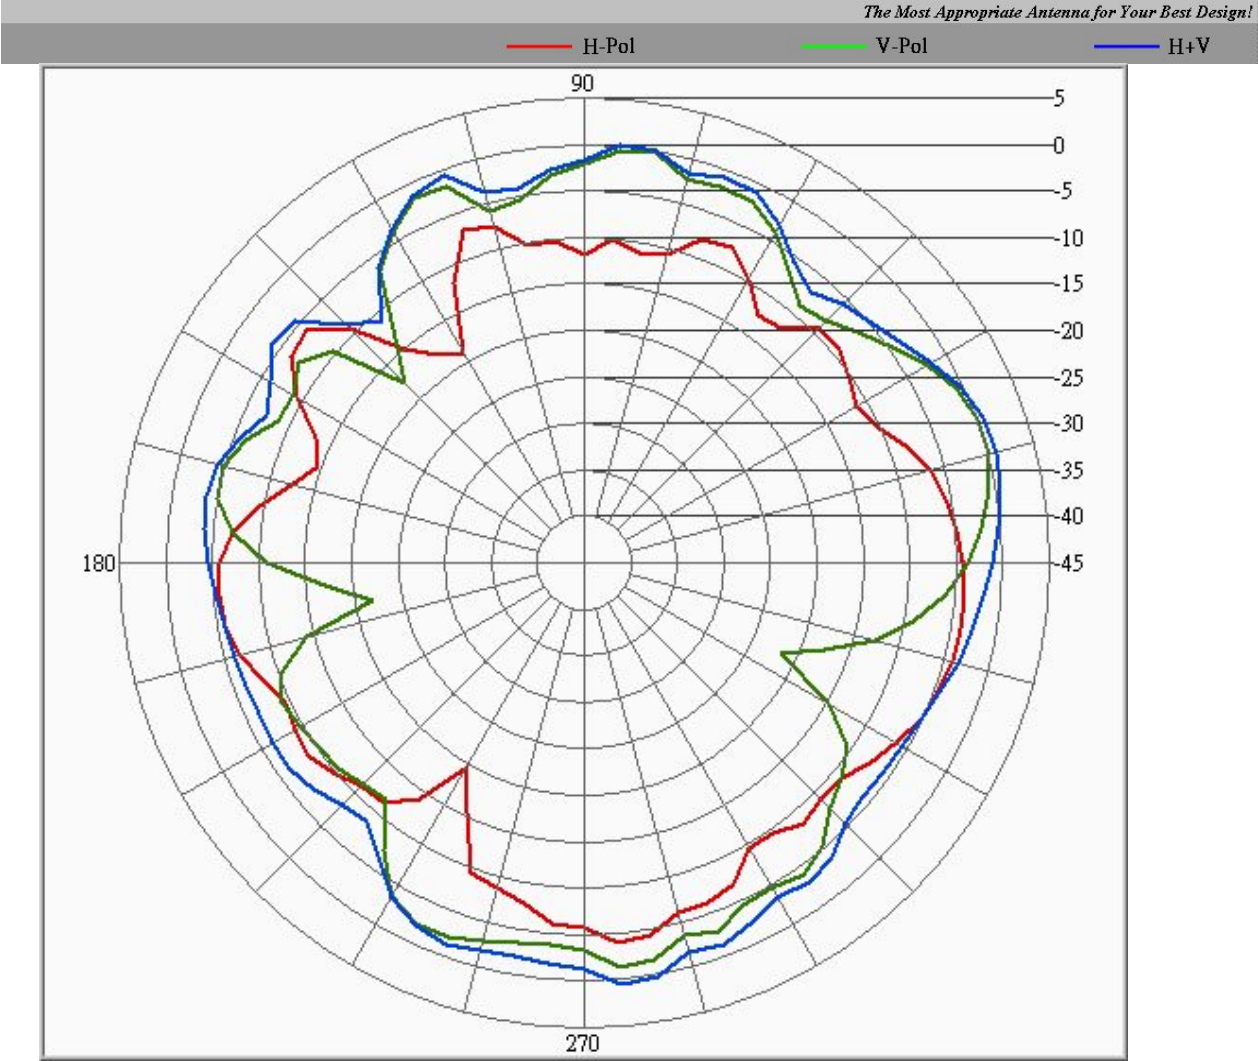


Tx1 antenna: 5725 MHz

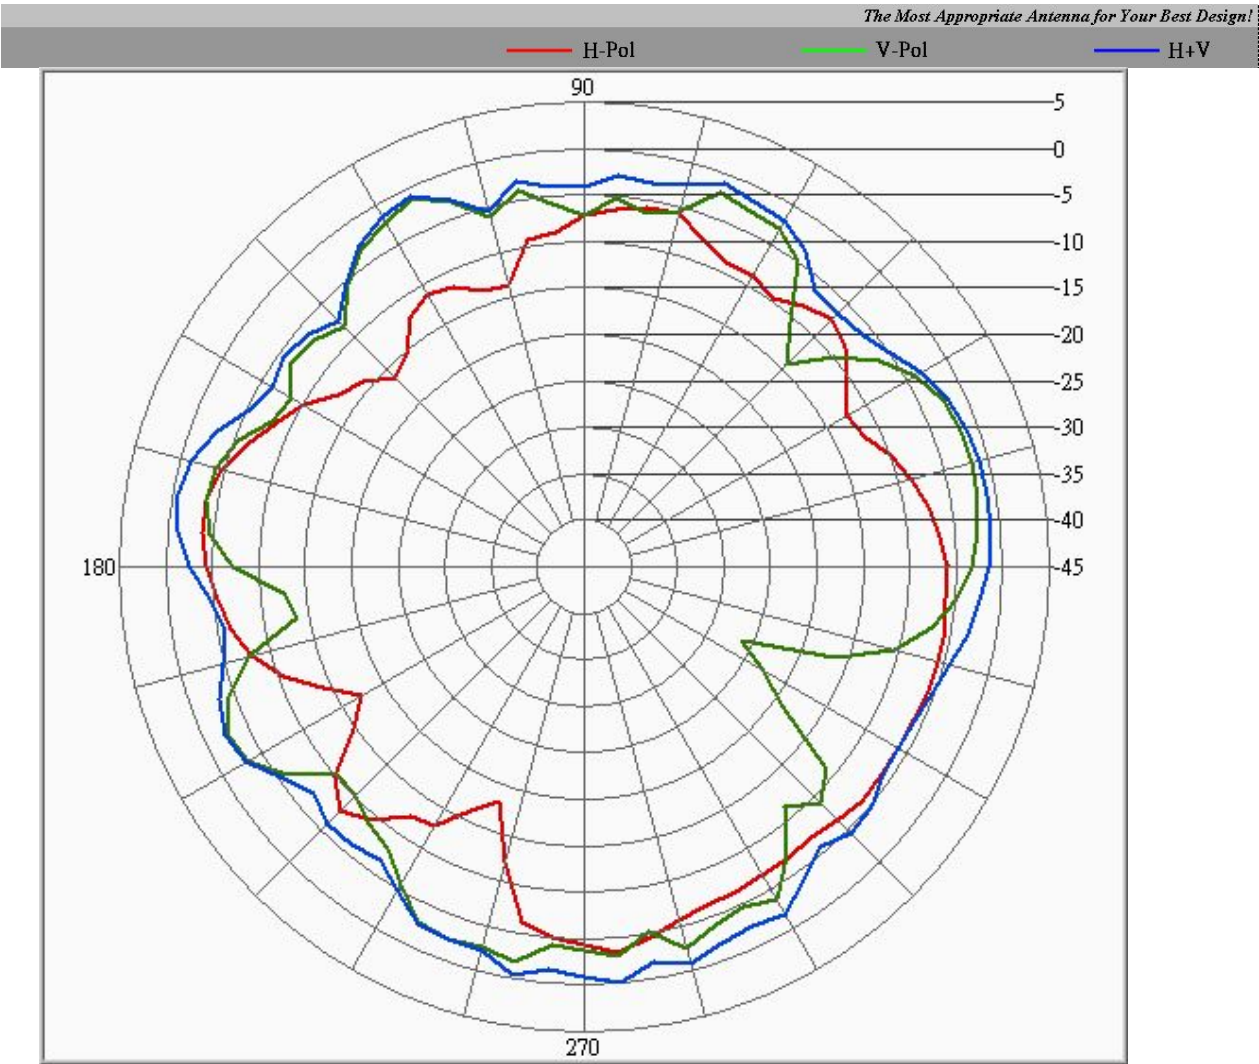


Tx1 antenna: 5875 MHz

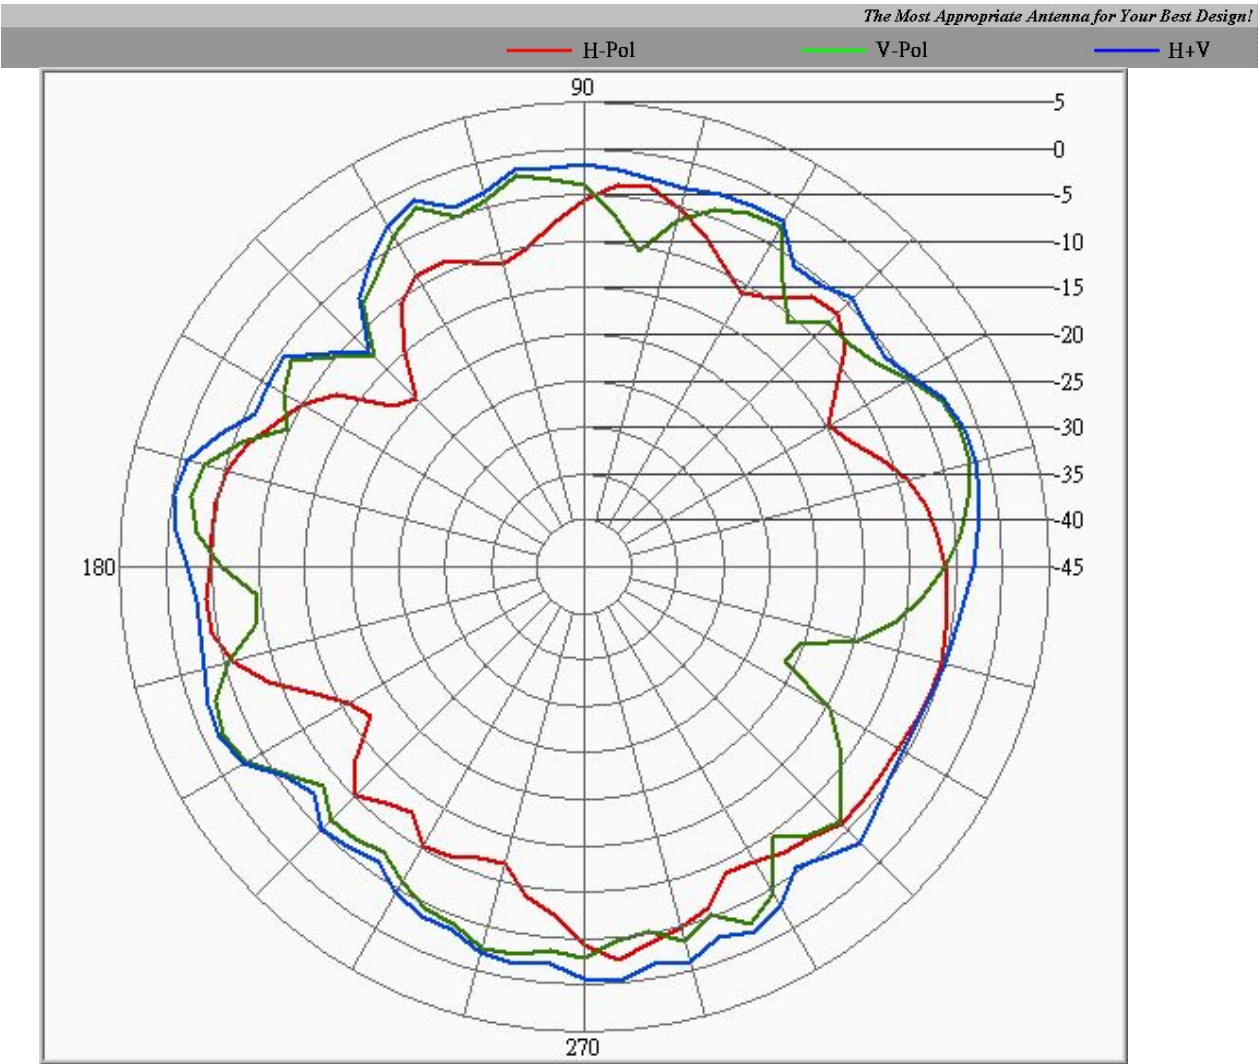


Tx2 antenna: 5470 MHz

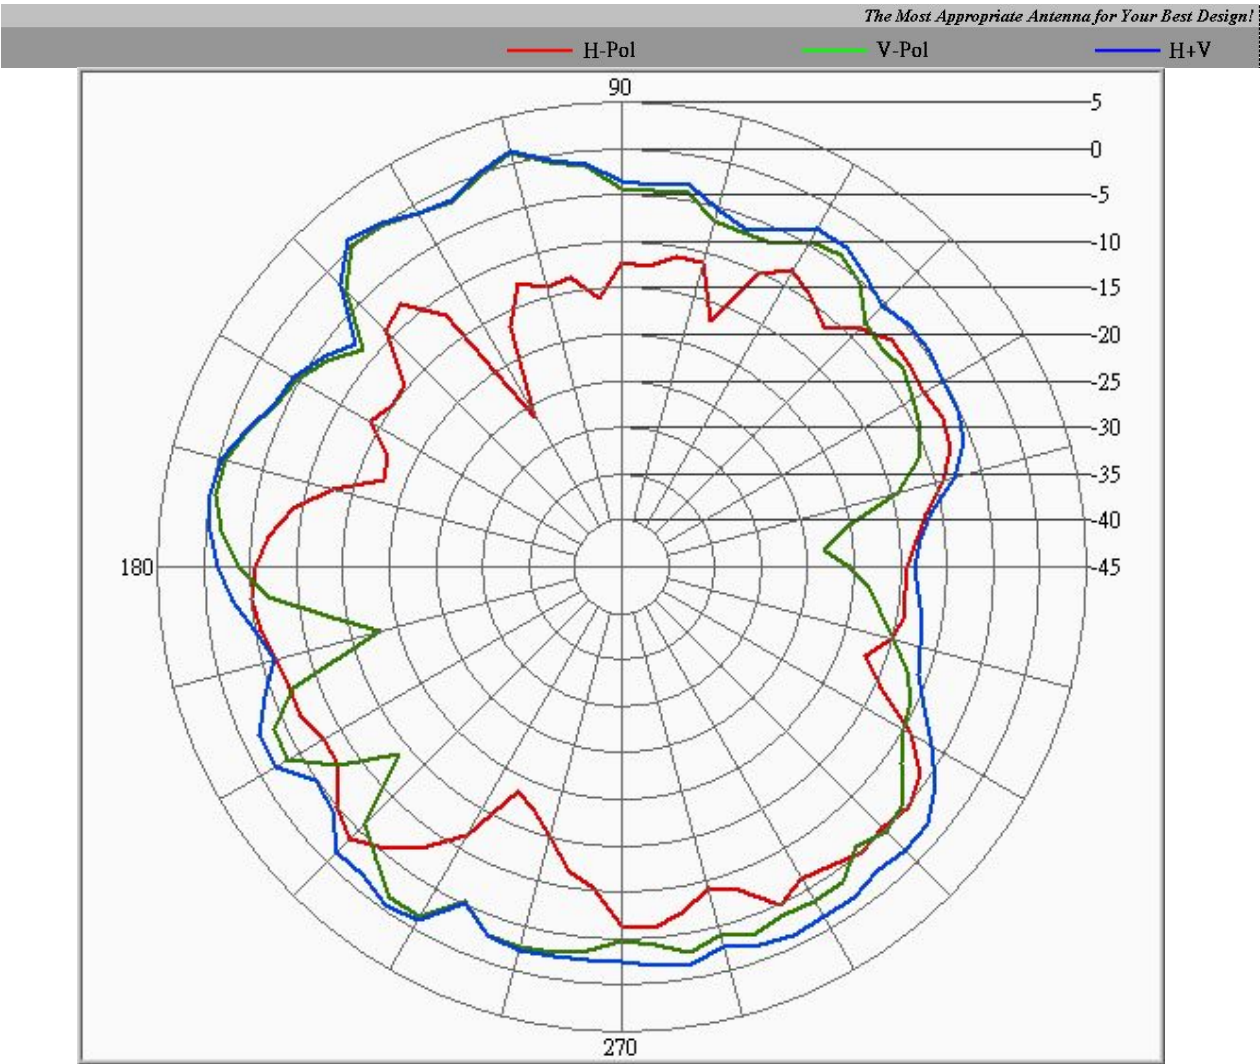


Tx2 antenna: 5725 MHz

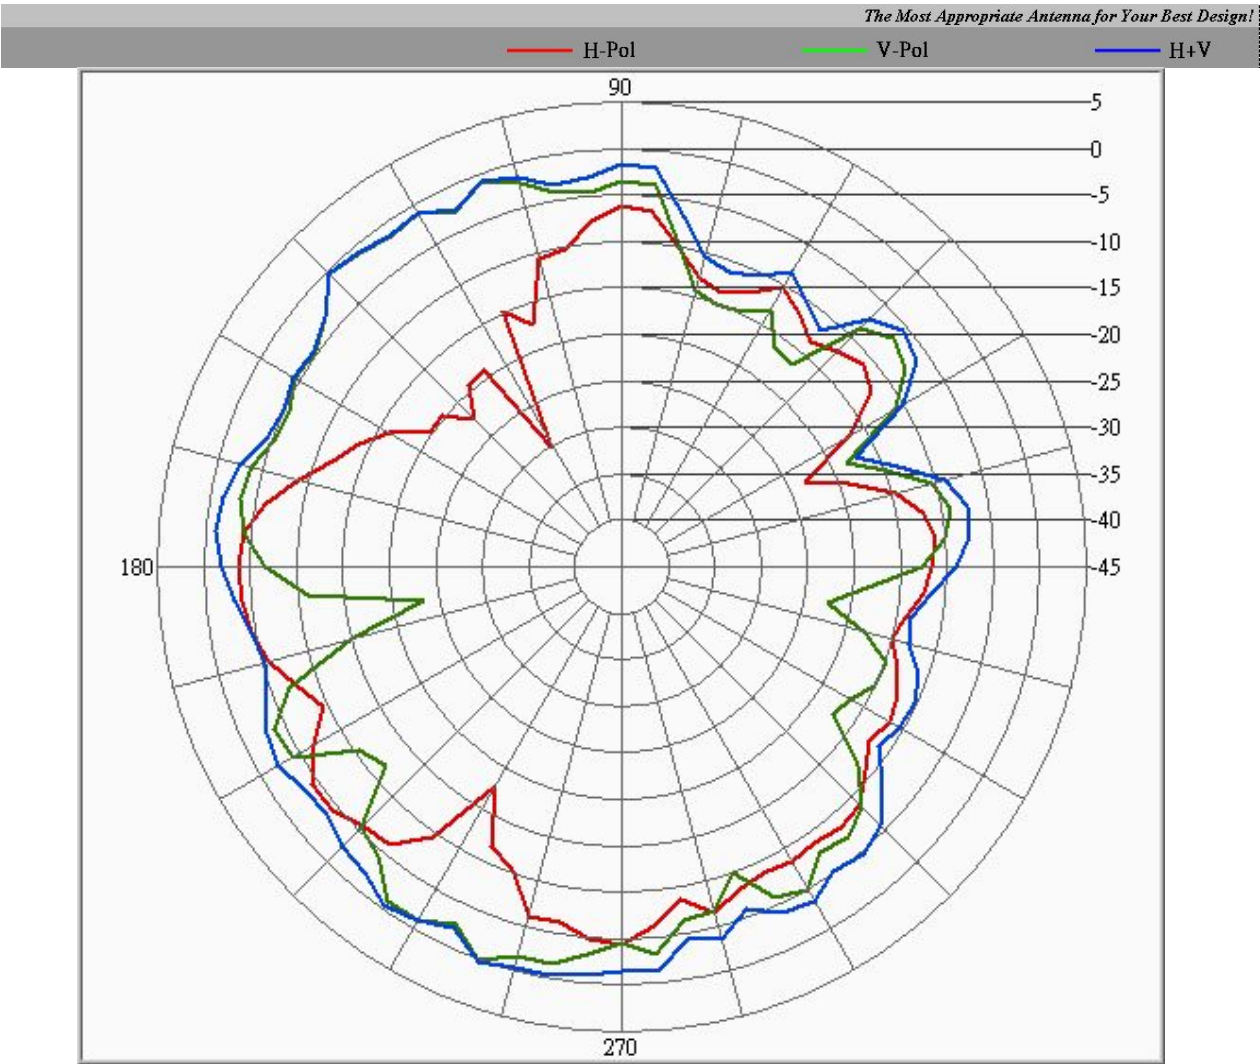

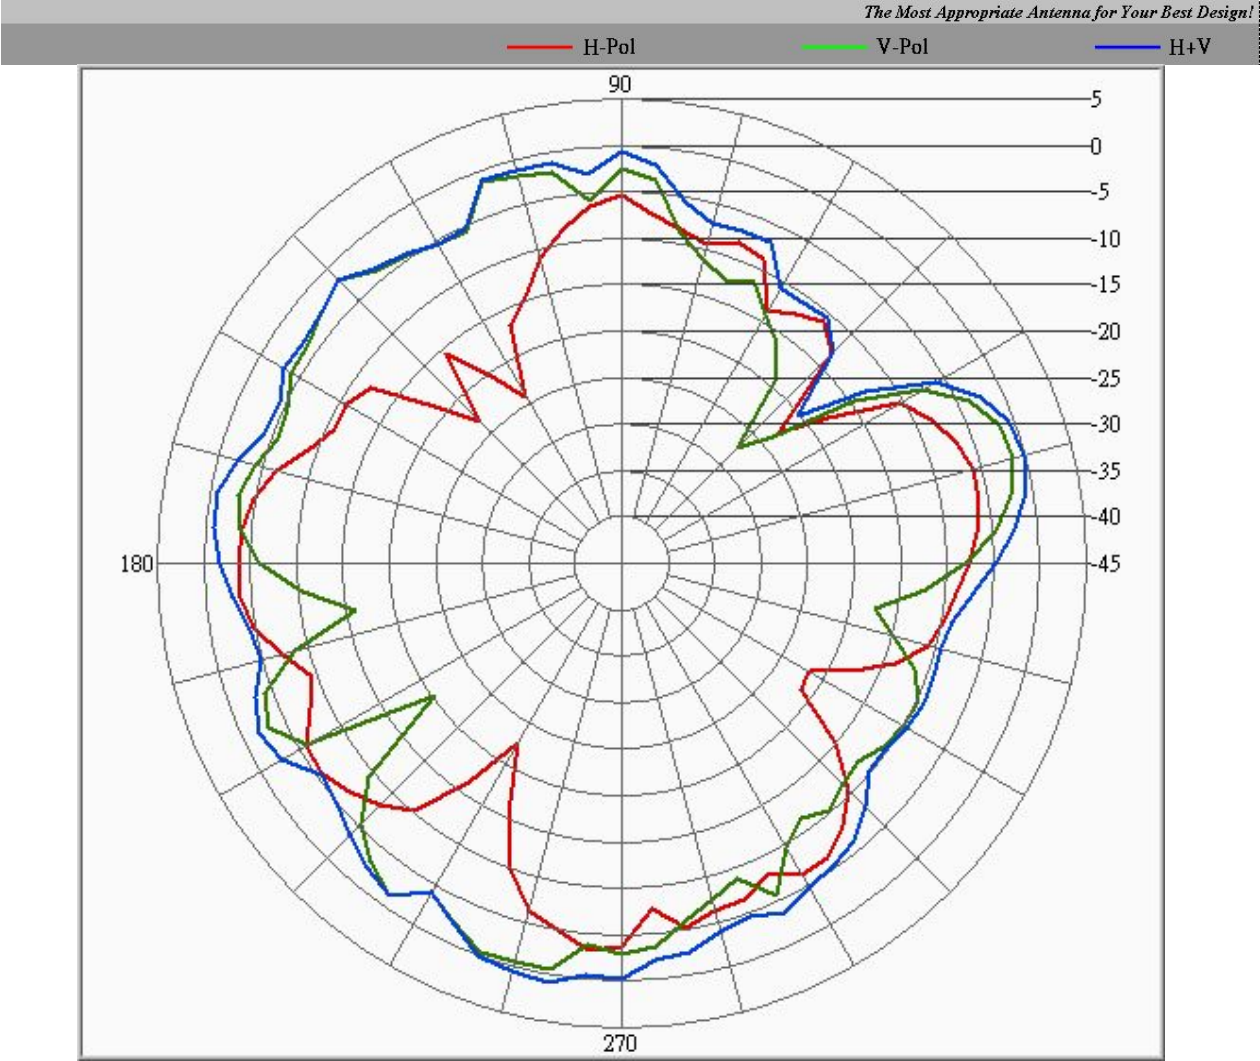


Tx3 (or Rx3): 5470 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

The Most Appropriate Antenna for Your Best Design!

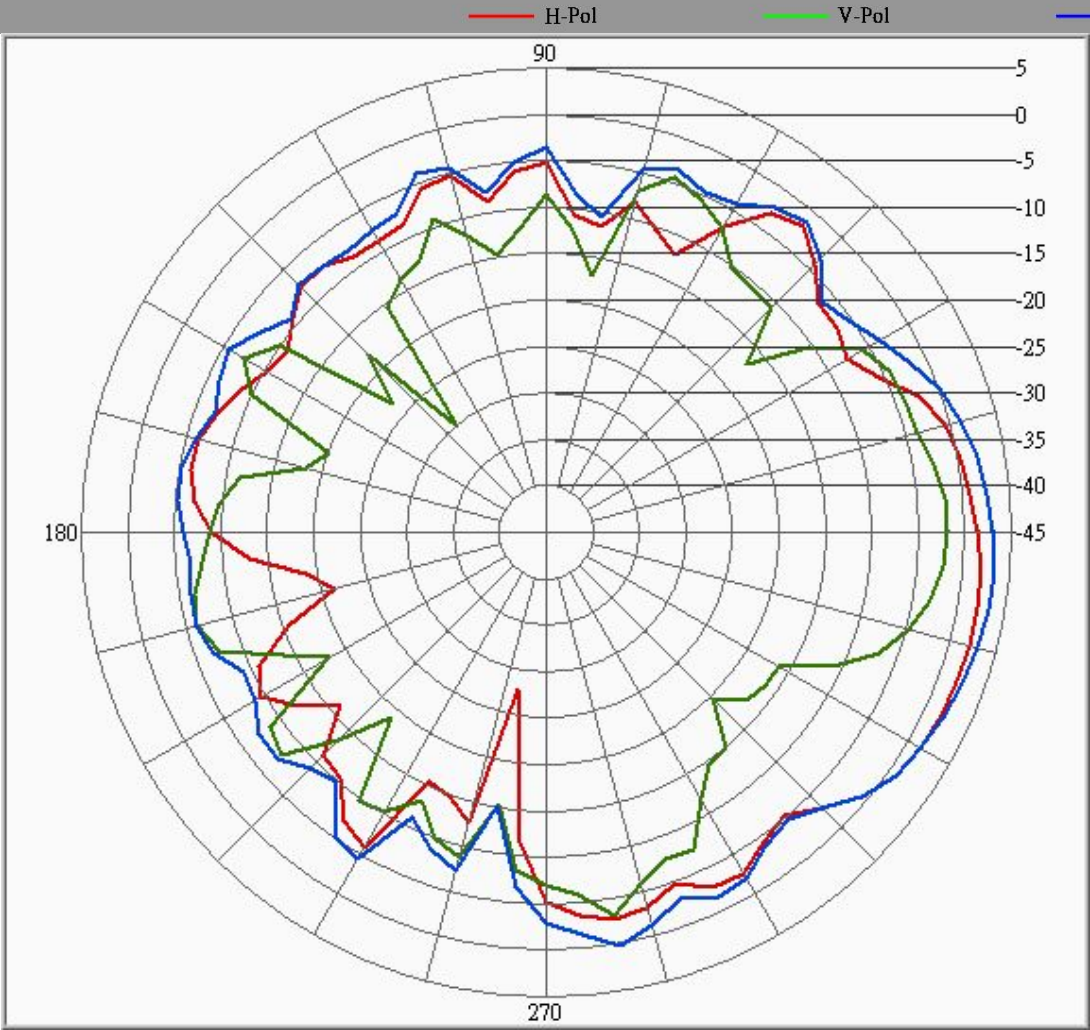


Center Frequency	5470 MHz
Horizontal (dBi) peak	2.1
Vertical (dBi) peak	-1.8

Tx3 (or Rx3) antenna: 5725 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

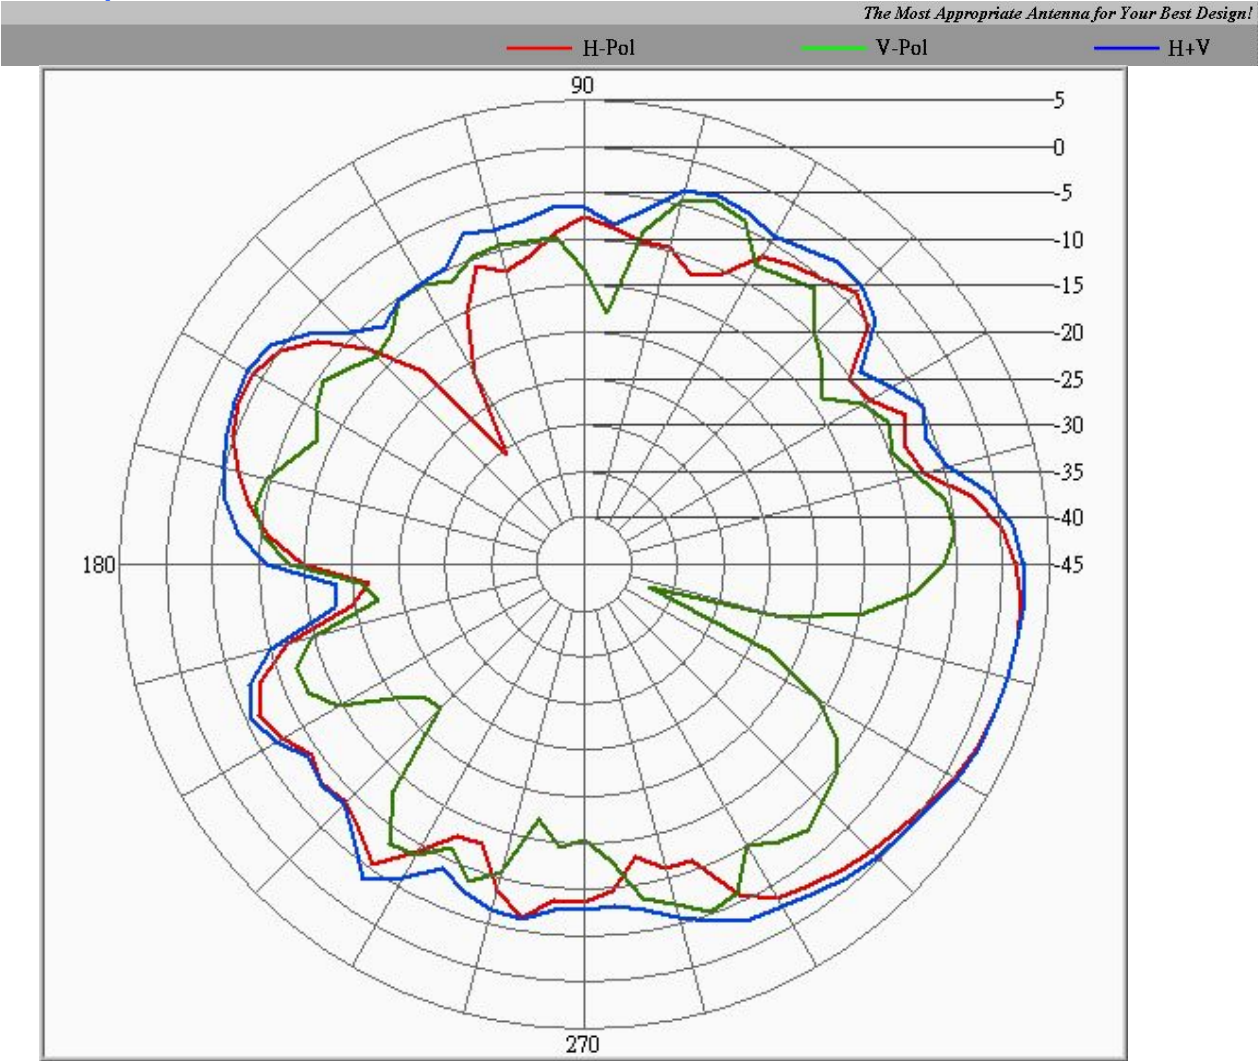

Center Frequency	5725 MHz
Horizontal (dBi) peak	2.3
Vertical (dBi) peak	-3.4

Tx3 (or Rx3) antenna: 5875 MHz (Plot is not required if 3rd Antenna is receive only e.g. Rx3 for 4965AGN)

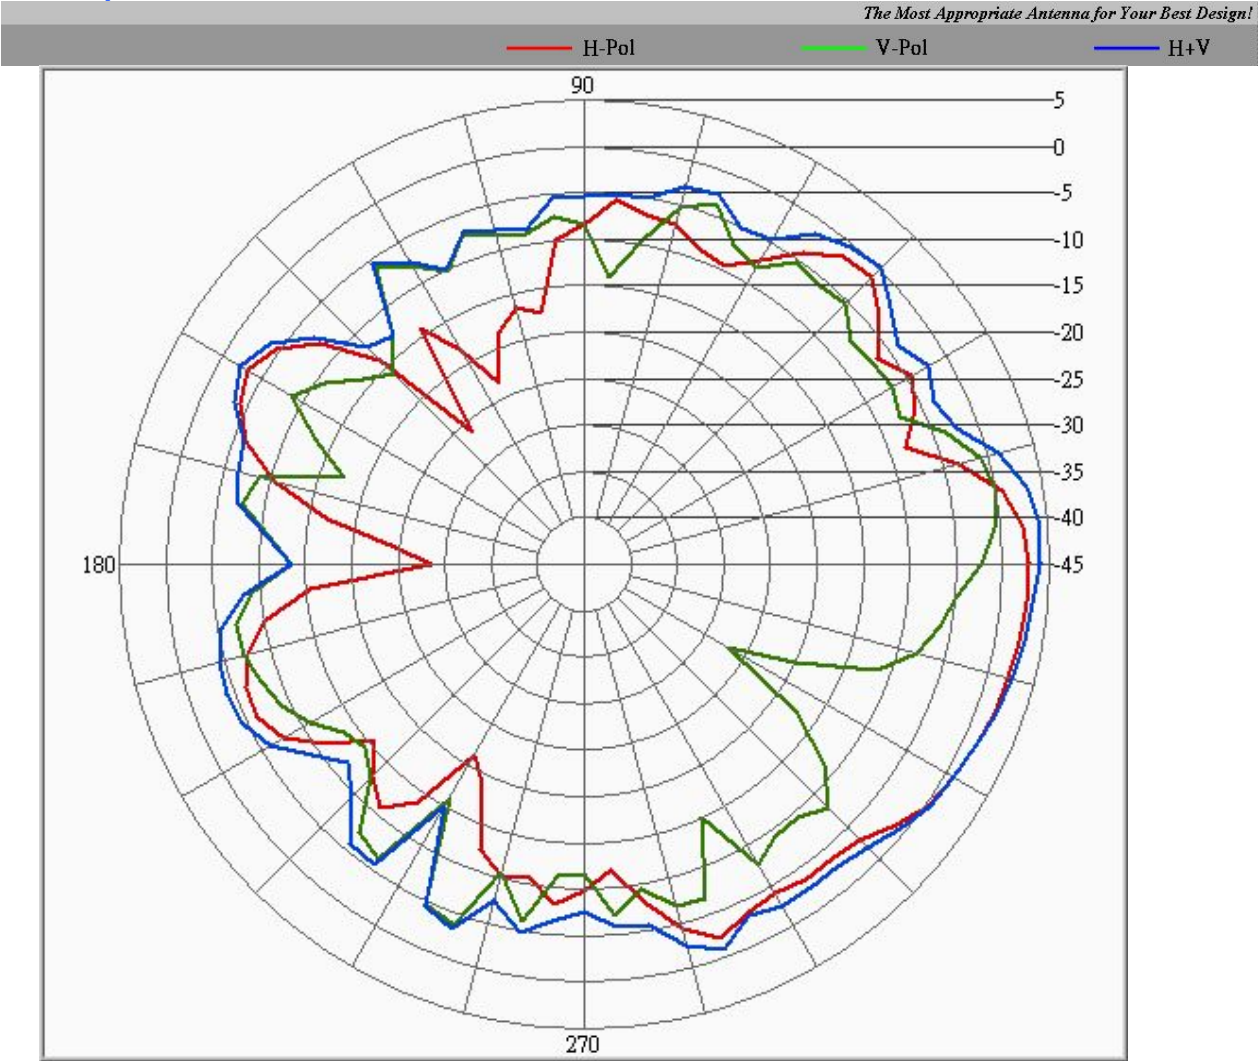



Section 4. Host Platform Information

OEM / ODM Host platform: Dell Diaz

Rating Label Photo:



Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of Tx1, Tx2 and Tx3 antenna placements. (Not applicable for receive-only antenna e.g. Rx3 for 4965AGN)

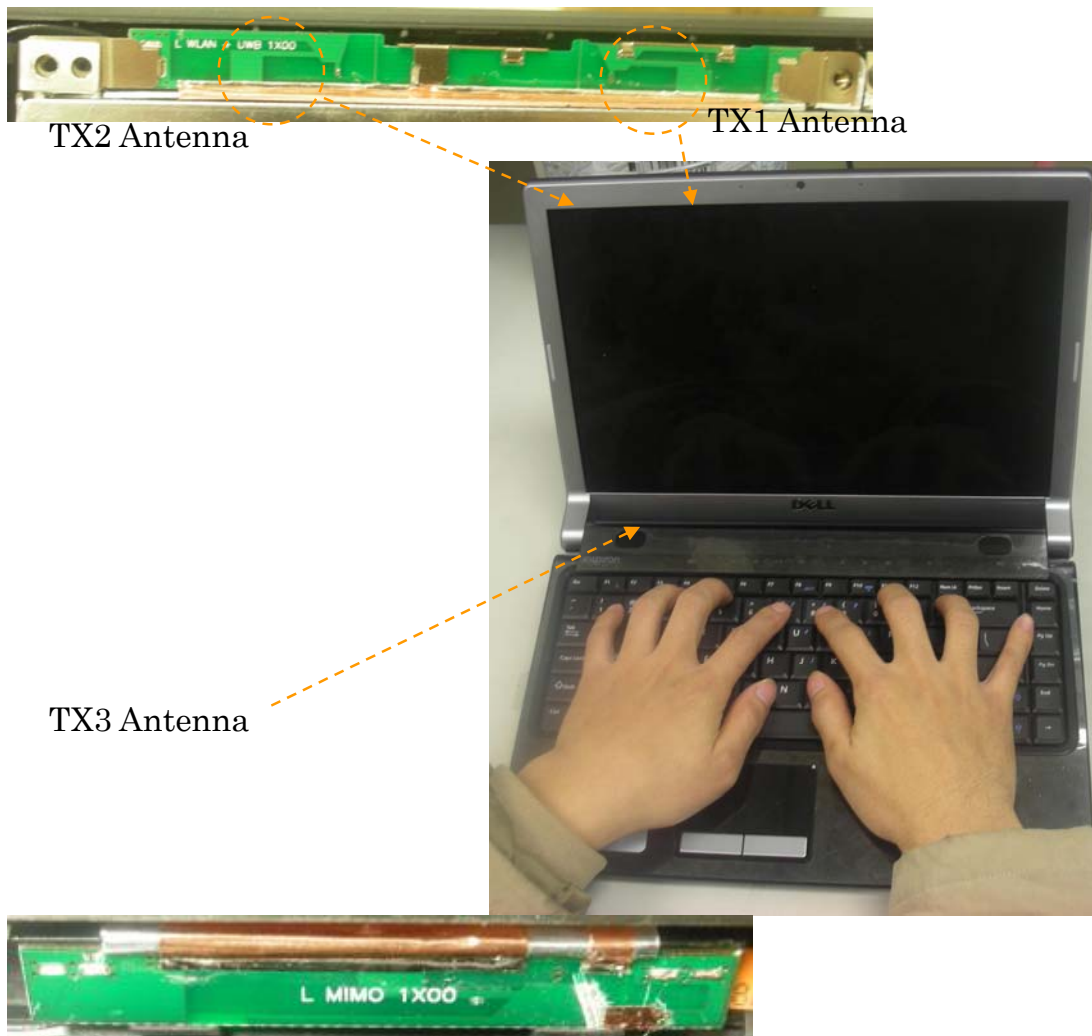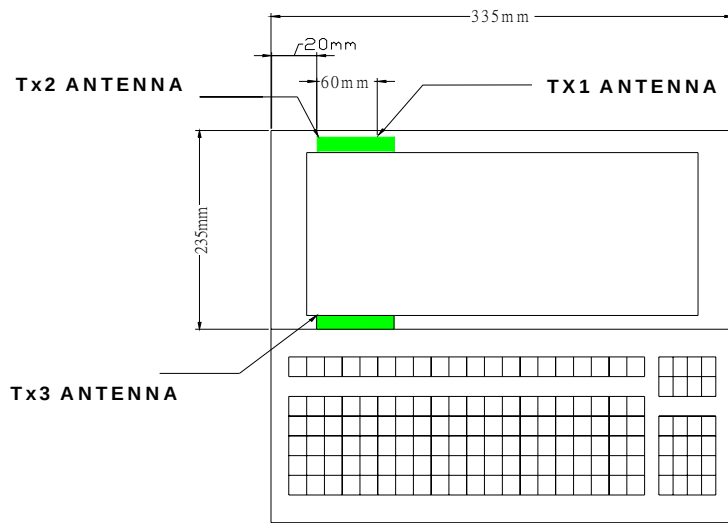

Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

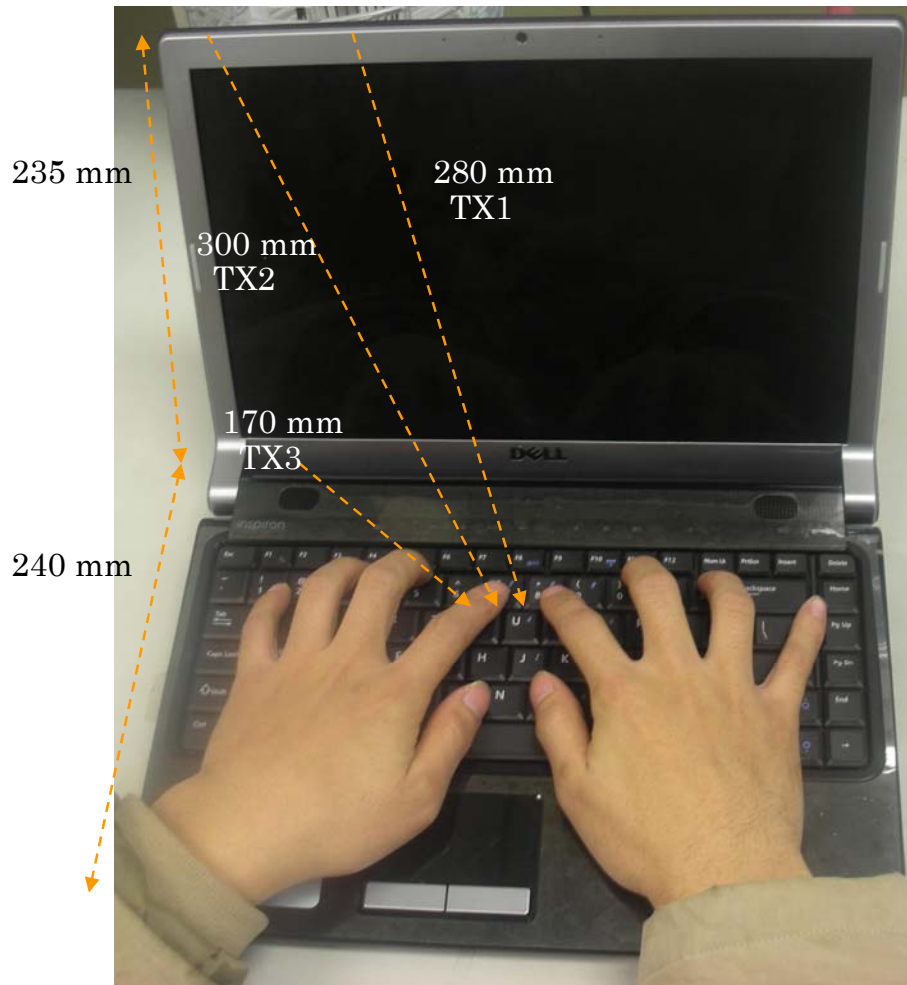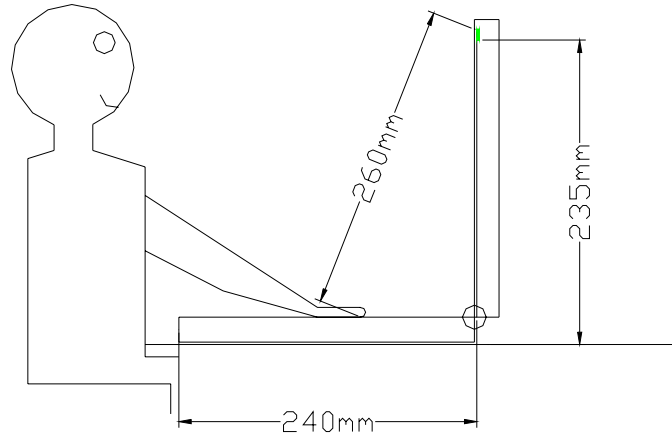

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

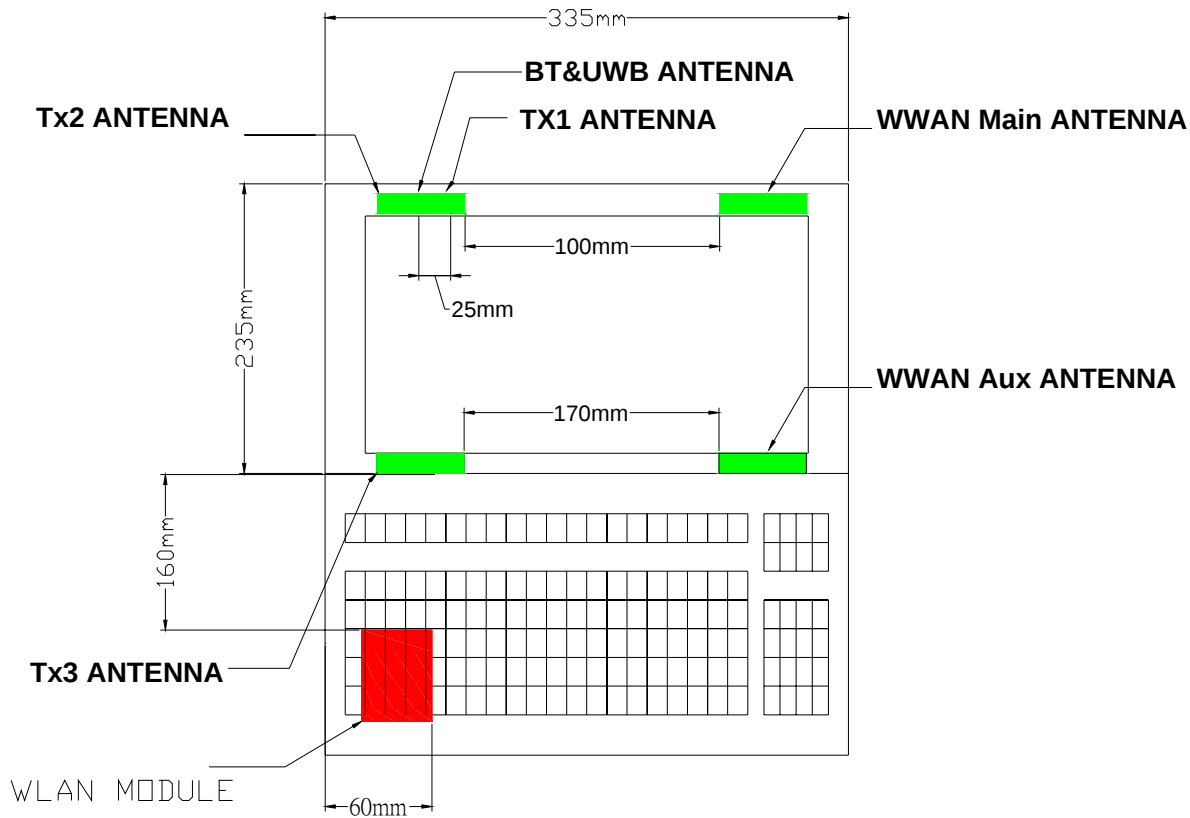

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						