

FCC SAR TEST REPORT

FCC ID : E2KEXMG1A
Equipment : LTE Module
Brand Name : COMPAL
Model Name : EXM-G1A
Applicant : Dell Inc.
One Dell Way Round Rock, TX 78682, USA
Manufacturer : Dell Inc.
One Dell Way Round Rock, TX 78682, USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P195G) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	8
4. RF Exposure Limits.....	11
4.1 Uncontrolled Environment.....	11
4.2 Controlled Environment.....	11
5. Antenna Location	12
6. Simultaneous Transmission Analysis	14
6.1 Body Exposure Conditions	14
6.2 SPLSR Evaluation and Analysis	15
7. References.....	16
Appendix A. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA4D1701	01	Initial issue of report	Mar. 03, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Dell Inc., LTE Module, EXM-G1A, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Body (Separation 0mm)	
			1g SAR (W/kg)	
Licensed	WCDMA	WCDMA II	1.12	1.50
		WCDMA IV	1.16	
		WCDMA V	1.10	
	LTE	LTE Band 7	1.10	
		LTE Band 12	1.02	
		LTE Band 13	1.11	
		LTE Band 14	1.20	
		LTE Band 2/25	1.16	
		LTE Band 5/26	1.10	
		LTE Band 38/41	1.14	
		LTE Band 48	0.44	
		LTE Band 4/66	1.14	
		LTE Band 71	0.63	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	LTE Module
Brand Name	COMPAL
Model Name	EXM-G1A
FCC ID	E2KEXMG1A
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM
Remark: 1. Based on original filing FCC ID: E2KEXMG1A, Sporton Report no.: FA491207 to added MediaTek MT7925B14L WLAN/BT module from Sporton Report no.: FA510633, FCC ID: RAS-MT7925B14L and evaluated Sim-Tx analysis include in section 6. 2. For this application that the WWAN output power and the sensor detection all the same original report No.: FA491207.	

Host Information	
Equipment Name	Portable Computer
Brand Name	DELL
Model Name	P195G
Integrated RFID Module	Brand Name: Dell Model Name: DWRFID2403
Wireless Technology and Frequency Range	RFID: 13.56 MHz
Mode	RFID: ASK
EUT Stage	Identical Prototype

WLAN Module Information	
Integrated WLAN Module	Brand Name: MediaTek Model Name: MT7925B14L
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)
(P/N: F-0G-FS-6183-001-00-01 / 025.902GM.0001) Tx1/ Rx1 Antenna	SPEED	Monopole	(1) Cable P/N: SY113SLL (2) Cable length: 268mm diameter: 1.13mm 50 ohm Coaxial (3) Connector P/N: I-PEX MHF4	617-698MHz
				-3.20 dBi (peak)
				698-821MHz
				0.21 dBi (peak)
				824-960MHz
				-1.09 dBi (peak)
				1427-1610MHz
				-1.63 dBi (peak)
				1695-2180MHz
				0.75 dBi (peak)
				2300-2690MHz
				1.47 dBi (peak)
				3300-3890MHz
				-1.12 dBi (peak)
(P/N: F-0G-FS-6183-001-00-01 / 025.902GM.0001) Rx2 Antenna	SPEED	Monopole	(1) Cable P/N: SY113SLL (2) Cable length: 280mm diameter: 1.13mm 50 ohm Coaxial (3) Connector P/N: I-PEX MHF4	5150-5925MHz
				-1.03 dBi (peak)
				617-698MHz
				-2.23 dBi (peak)
				698-821MHz
				-0.46 dBi (peak)
				716-821MHz
				-0.46 dBi (peak)
				824-960MHz
				-2.03 dBi (peak)
				1427-1517MHz
				-1.95 dBi (peak)
				1557-1610MHz
				-0.44 dBi (peak)
				1805-2180MHz
				0.59 dBi (peak)

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)
(P/N: 57ELBE15.035 / 025.902GM.0011) Tx1/ Rx1 Antenna	Wistron NeWeb Corporation	Monopole	(1) Cable P/N: SY113SLL (2) Cable length: 268mm diameter: 1.13mm 50 ohm Coaxial (3) Connector P/N: I-PEX MHF4	617-698MHz
				-3.20 dBi (peak)
				698-821MHz
				0.21 dBi (peak)
				824-960MHz
				-1.09 dBi (peak)
				1427-1610MHz
				-1.63 dBi (peak)
				1695-2180MHz
				0.75 dBi (peak)
				2300-2690MHz
				1.47 dBi (peak)
				3300-3890MHz
				-1.12 dBi (peak)
(P/N: 57ELBE15.035 / 025.902GM.0011) Rx2 Antenna	Wistron NeWeb Corporation	Monopole	(1) Cable P/N: SY113SLL (2) Cable length: 280mm diameter: 1.13mm 50 ohm Coaxial (3) Connector P/N: I-PEX MHF4	5150-5925MHz
				-1.03 dBi (peak)
				617-698MHz
				-2.23 dBi (peak)
				698-821MHz
				-0.46 dBi (peak)
				716-821MHz
				-0.46 dBi (peak)
				824-960MHz
				-2.03 dBi (peak)
				1427-1517MHz
				-1.95 dBi (peak)
				1557-1610MHz
				-0.44 dBi (peak)
				1805-2180MHz
				0.59 dBi (peak)

WLAN Antenna Information_ Speed									
Main	Ant. Type	PIFA			Aux	Ant. Type	PIFA		
	Model No.	F-0G-FS-6182-001-00 (025.902GK.0001)				Model No.	F-0G-FS-6182-002-00 (025.902GL.0001)		
	Peak Gain (dBi)			Peak Gain (dBi)					
	2400~2483.5MHz	-0.68	5850~5895MHz	3.05		2400~2483.5MHz	-1.01	5850~5895MHz	3.15
	5150~5250MHz	2.14	5925~6425MHz	3.53		5150~5250MHz	1.71	5925~6425MHz	3.67
	5250~5350MHz	2.21	6425~6525MHz	2.55		5250~5350MHz	1.71	6425~6525MHz	3.48
	5470~5725MHz	3.66	6525~6875MHz	2.65		5470~5725MHz	3.03	6525~6875MHz	3.48
	5725~5850MHz	3.08	6875~7125MHz	1.35		5725~5850MHz	3.17	6875~7125MHz	1.99
WLAN Antenna Information_ WNC									
Main	Ant. Type	PIFA			Aux	Ant. Type	PIFA		
	Model No.	57ELBE15.036 (025.902GQ.0001)				Model No.	57ELBE15.039 (025.902GL.0011)		
	Peak Gain (dBi)			Peak Gain (dBi)					
	2400~2483.5MHz	-0.68	5850~5895MHz	3.05		2400~2483.5MHz	-1.01	5850~5895MHz	3.15
	5150~5250MHz	2.14	5925~6425MHz	3.53		5150~5250MHz	1.71	5925~6425MHz	3.67
	5250~5350MHz	2.21	6425~6525MHz	2.55		5250~5350MHz	1.71	6425~6525MHz	3.48
	5470~5725MHz	3.66	6525~6875MHz	2.65		5470~5725MHz	3.03	6525~6875MHz	3.48
	5725~5850MHz	3.08	6875~7125MHz	1.35		5725~5850MHz	3.17	6875~7125MHz	1.99

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID		E2KEXMG1A																																																																								
Equipment Name		LTE Module																																																																								
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																								
Channel Bandwidth		LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																								
uplink modulations used		QPSK / 16QAM / 64QAM																																																																								
LTE Voice / Data requirements		Data only																																																																								
LTE MPR permanently built-in by design		<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																								
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																								
Power reduction applied to satisfy SAR compliance		Yes, Proximity Sensor and power verification refer to original report no.: FA491207.																																																																								
LTE Carrier Aggregation Combinations		Intra-Band ULCA combinations and the detail power measurement please referred to original Report no.: FA491207 section 13.																																																																								
LTE Carrier Aggregation Additional Information		This device supports maximum of 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																								

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)					
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26											
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	
LTE Band 38											
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580			
M	38000	2595	38000	2595	38000	2595	38000	2595			
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610			
LTE Band 41											
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506			
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5			
M	40620	2593	40620	2593	40620	2593	40620	2593			
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5			
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680			
LTE Band 48											
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560			
L	55810	3607	55815	3607.5	55820	3608	55830	3609			
M	56170	3643	56165	3642.5	56160	3642	56150	3641			
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690			
LTE Band 66											
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572
LTE Band 71											
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	133147	665.5	133172	668	133197	670.5	133222	673			
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5			
H	133447	695.5	133422	693	133397	690.5	133372	688			

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Antenna Location


<Tablet Mode>



The separation distance for antenna to edge :

Antenna	To Top Edge (mm)	To Right Edge (mm)	To Bottom Edge (mm)	To Left Edge (mm)
WWAN Antenna	10.7	11.5	204	198.5
WLAN Antenna 1	197.98	253.6	< 5	23.6
WLAN/BT Antenna 2	197.98	23.6	< 5	253.6

<Laptop Mode>

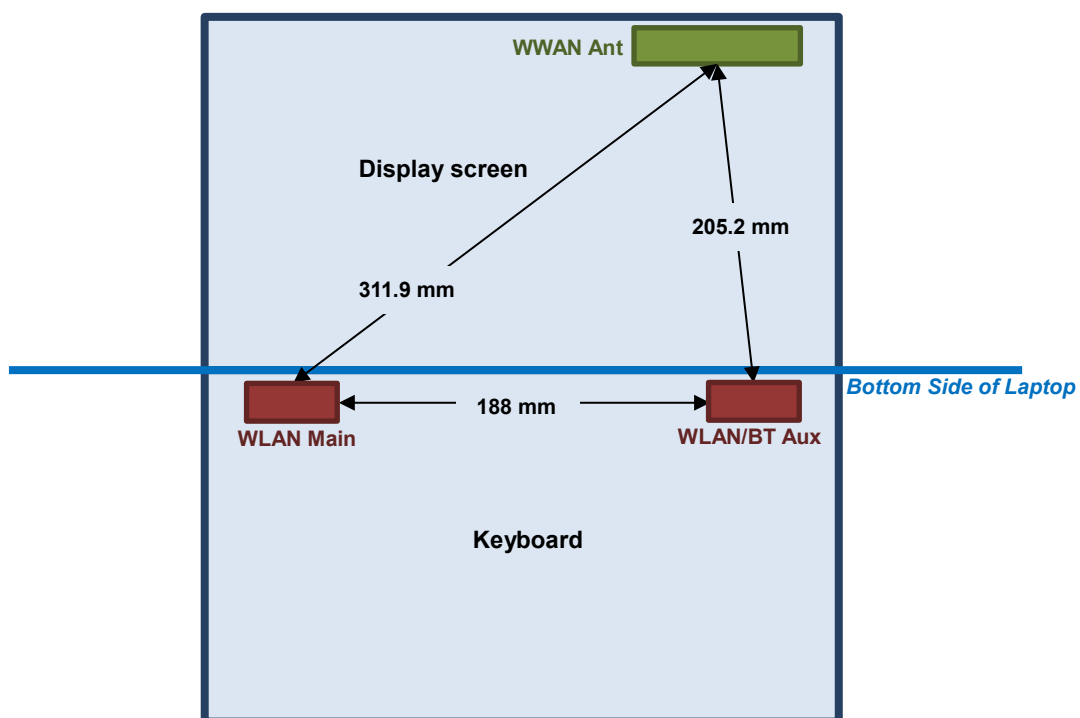

The separation distance for antenna to edge :

Antenna	To Bottom Side (mm)
WWAN Antenna	208.35
WLAN Main Antenna	4.42
WLAN/BT Aux Antenna	4.42

6. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + WLAN2.4GHz Main + WLAN2.4GHz Aux	Yes
2.	WWAN + WLAN2.4GHz Aux + WLAN5/6GHz Main	Yes
3.	WWAN + WLAN5/6GHz Main + WLAN5/6GHz Aux + Bluetooth Aux	Yes

General Note:

- The MediaTek MT7925B14L WLAN/BT module (FCC ID: RAS-MT7925B14L) is integrated into this host.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - The SPLSR calculated results please refer to section 6.2.

6.1 Body Exposure Conditions

Exposure Position	0	1	2	3	4	5	0+1+2	0+2+3	0+3+4+5	1+2	1+2	2+3	2+3	3+4+5	3+4+5
	Maximum WWAN 1g SAR (W/kg)	WLAN2.4GHz Main 1g SAR (W/kg)	WLAN2.4GHz Aux 1g SAR (W/kg)	WLAN5/6GHz Main 1g SAR (W/kg)	WLAN5/6GHz Aux 1g SAR (W/kg)	Bluetooth Aux 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No	SPLSR	Case No
Bottom Side at 0mm		0.961	1.103	0.397	0.508	0.114	2.064	1.500	1.019	0.020	Case 1				
Back at 0mm	0.287	1.183	1.043	1.178	0.860	0.158	2.513	2.508	2.483	0.020	Case 2	0.020	Case 3	0.020	Case 4
Right Edge at 0mm	0.690		0.098		0.081	0.015	0.788	0.788	0.786						
Left Edge at 0mm	0.190	0.093					0.283	0.190	0.190						
Bottom Edge at 0mm		0.435	0.681	0.240	0.273	0.105	1.116	0.921	0.618						
Top Edge at 0mm	1.196						1.196	1.196	1.196						

6.2 SPLSR Evaluation and Analysis

General Note:

1. According to antenna location the minimum distance between each transmit antenna is using for SPLSR analysis
2. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
3. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Case 1	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
	WLAN2.4GHz Main	Bottom Side	0.961	0mm	188.0	2.06	0.02	Not required
	WLAN2.4GHz Aux		1.103	0mm				
Case 2	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
	WLAN2.4GHz Main	Back	1.183	0mm	188.0	2.23	0.02	Not required
	WLAN2.4GHz Aux		1.043	0mm				
	WCDMA IV Main	Back	0.287	0mm	311.9	1.47	0.01	Not required
	WLAN2.4GHz Main		1.183	0mm				
	WCDMA IV Main	Back	0.287	0mm	205.2	1.33	0.01	Not required
	WLAN2.4GHz Aux		1.043	0mm				
Case 3	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
	WLAN2.4GHz Aux	Back	1.043	0mm	188.0	2.22	0.02	Not required
	WLAN5GHz Main		1.178	0mm				
	WCDMA IV Main	Back	0.287	0mm	205.2	1.33	0.01	Not required
	WLAN2.4GHz Aux		1.043	0mm				
	WCDMA IV Main	Back	0.287	0mm	311.9	1.47	0.01	Not required
	WLAN5GHz Main		1.178	0mm				
Case 4	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
	WLAN5GHz Main	Back	1.178	0mm	188.0	2.20	0.02	Not required
	WLAN5GHz+Bluetooth Aux		1.018	0mm				
	WCDMA IV Main	Back	0.287	0mm	311.9	1.47	0.01	Not required
	WLAN5GHz Main		1.178	0mm				
	WCDMA IV Main	Back	0.287	0mm	205.2	1.31	0.01	Not required
	WLAN5GHz+Bluetooth Aux		1.018	0mm				

7. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [6] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [7] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [8] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [9] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015