


Photographs of EUT Setup and Antenna Location


The photographs of EUT and setup for SAR testing are shown as follows.

<Front Face View> Laptop Mode (180°)

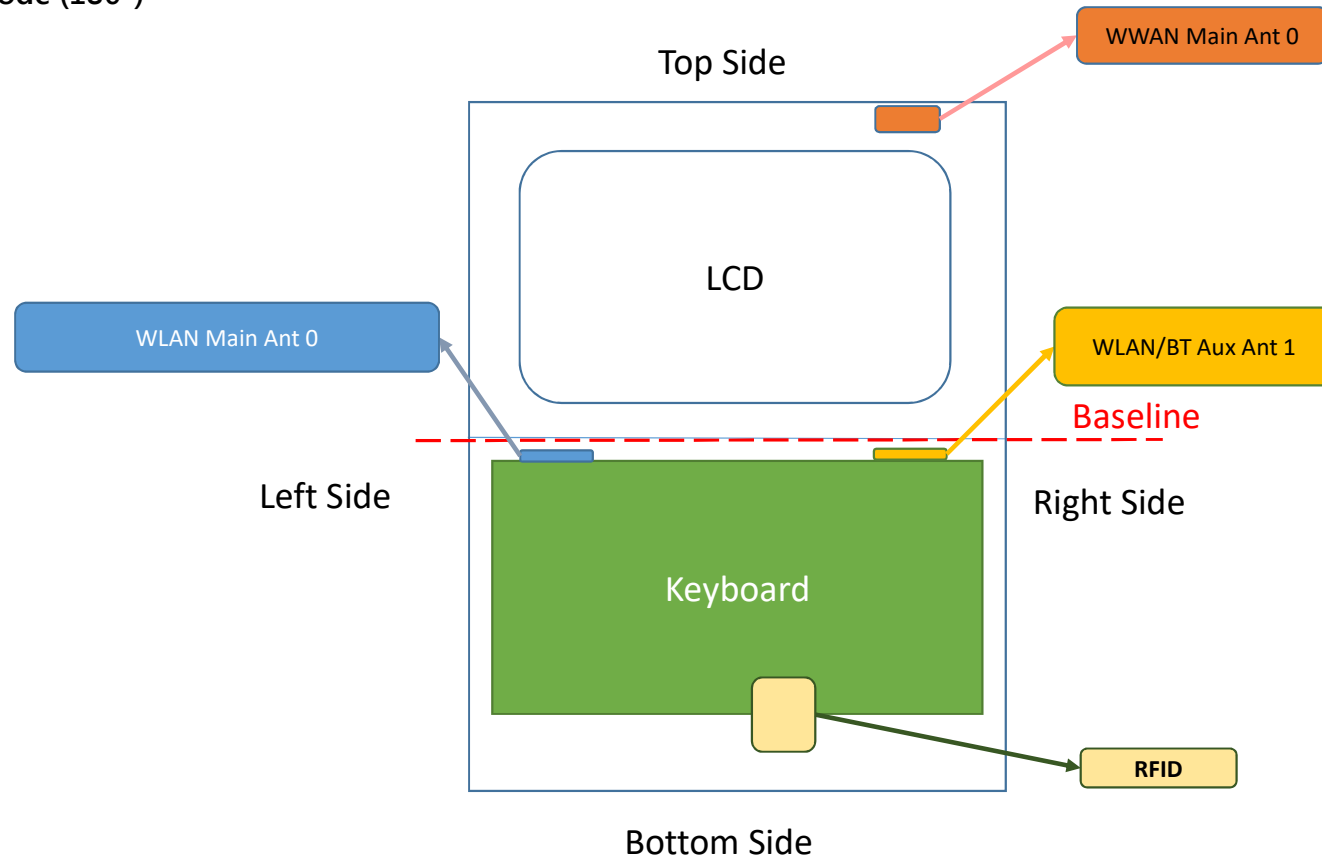


Antenna	To Top Side	To Baseline	To Bottom	To Left Side	To Right Side	FCC+ISED_Support Band
	(mm)	(mm)	(mm)	(mm)	(mm)	
WWAN Main Ant 0	3.00	200.00		189.00	10.00	WCDMA B2 / 4 / 5 LTE B2 / 4 / 5 / 7 / 12 / 13 / 14 / 25 / 26 / 38 / 41 / 48 / 66 / 71
WLAN Main Ant 0	214.00	15.00	200.00	20.00	250.00	Wi-Fi 2.4G / 5G / 6G
WLAN/BT Aux Ant 1	214.00	15.00	200.00	250.00	20.00	Wi-Fi 2.4G / 5G / 6G / BT
RFID		152.00	24.00	166.00	107.00	RFID

<Right Side View> Laptop Mode(90°)

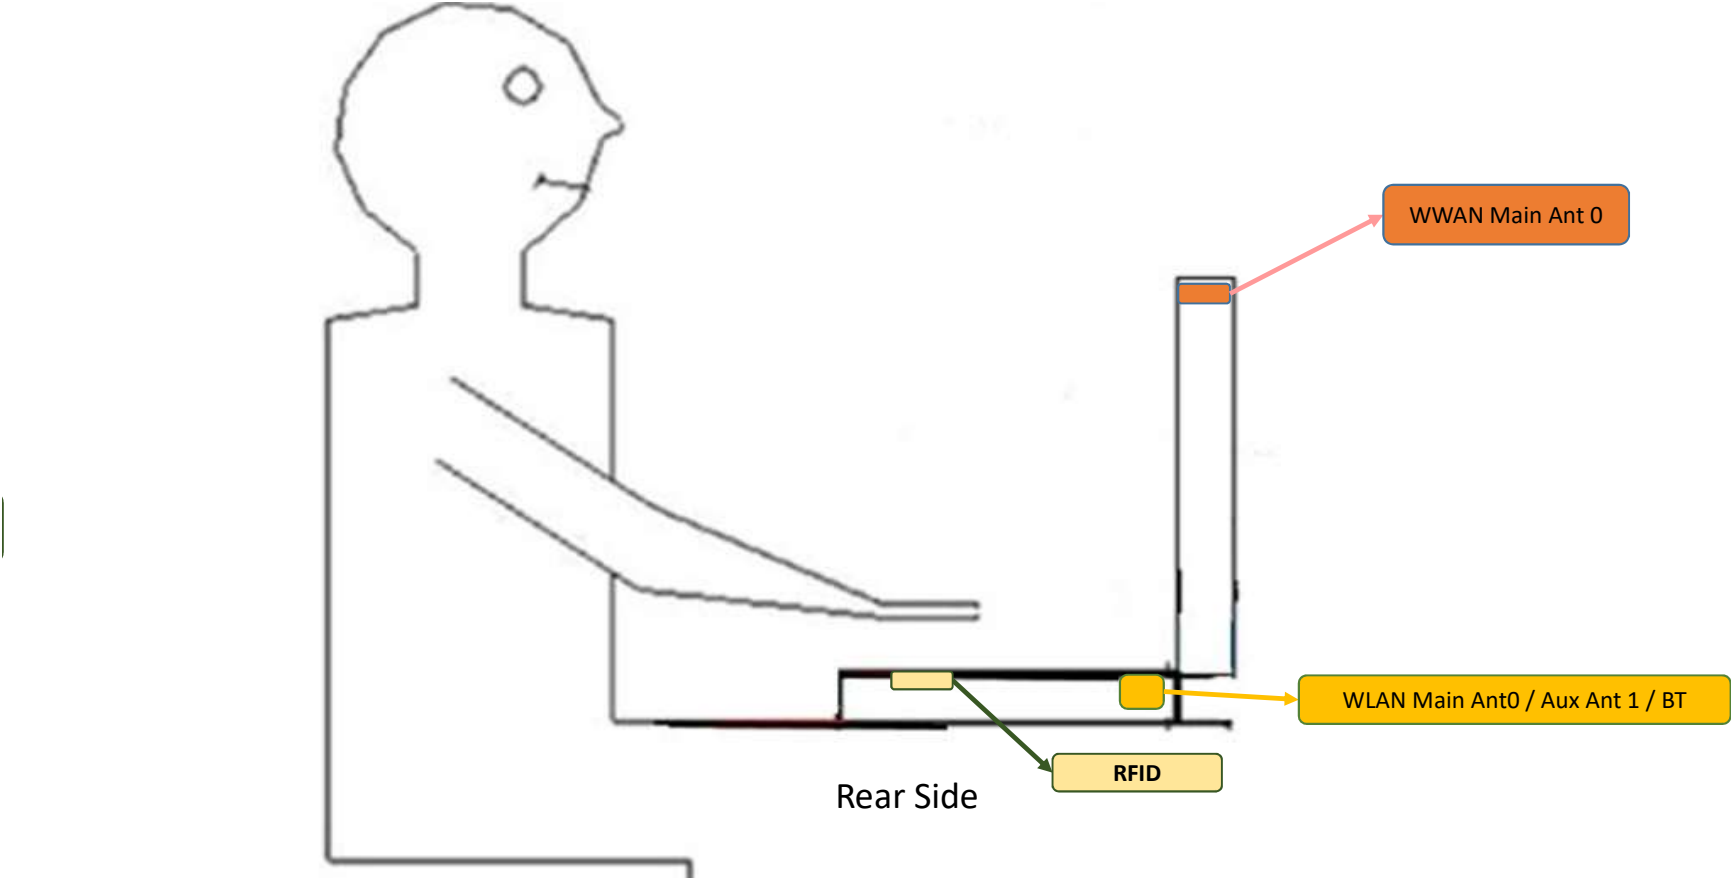

Antenna	Rear Face	
	(mm)	
WWAN Main Ant 0	225.00	
WLAN Main Ant 0	2.00	(w/o Bumper)
WLAN/BT Aux Ant 1	2.00	(w/o Bumper)
RFID	13.40	


<Front Face View> Tablet

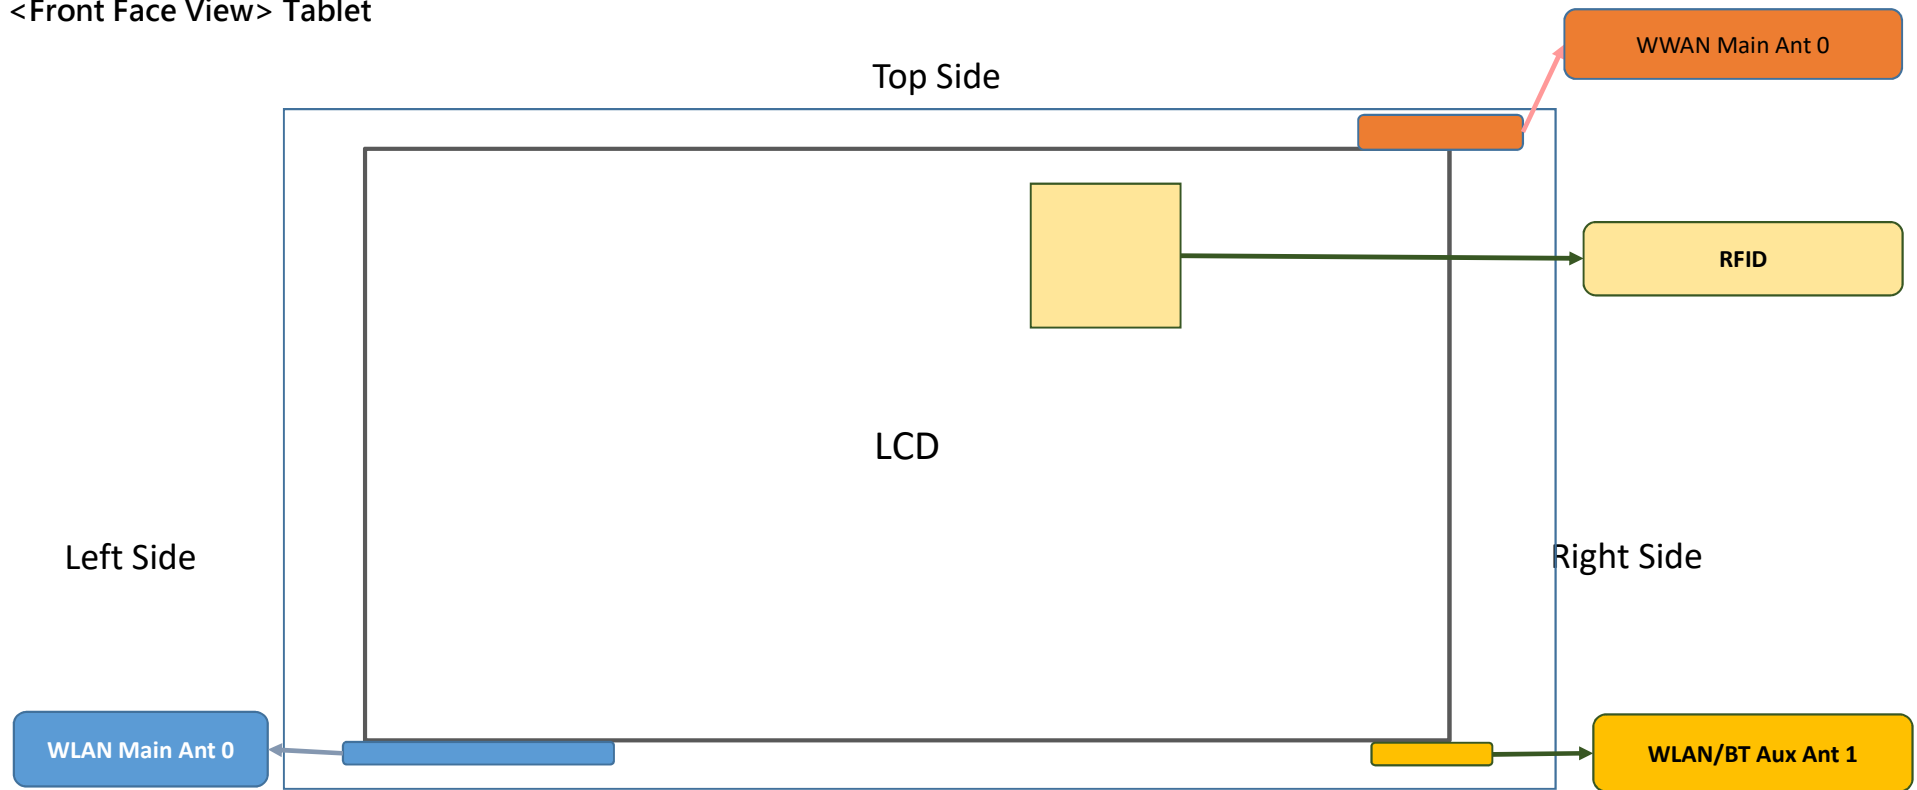

Bottom Side


Antenna	To Top Side	To Bottom Side	To Left Side	To Right Side
	(mm)	(mm)	(mm)	(mm)
WWAN Main Ant 0	3.00	200.00	189.00	10.00
WLAN Main Ant 0	200.00	15.00	20.00	250.00
WLAN/BT Aux Ant 1	200.00	15.00	250.00	20.00
RFID	24.00	152.00	166.00	107.00

<Rear Face View> Tablet

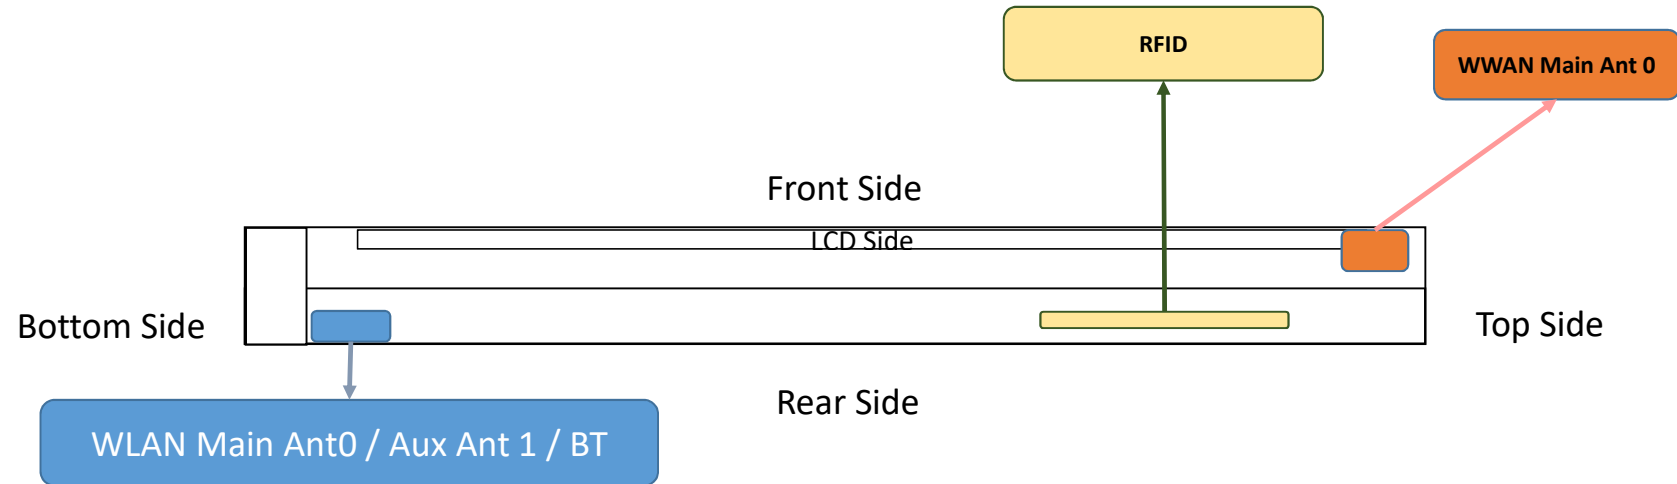

Antenna	To Front Side	To Rear Side
	(mm)	(mm)
WWAN Main Ant 0	1.00	9.00
WLAN Main Ant 0	10.00	0.00
WLAN/BT Aux Ant 1	10.00	0.00
RFID	21.00	3.00

<Photographs of Body SAR Test Setup>

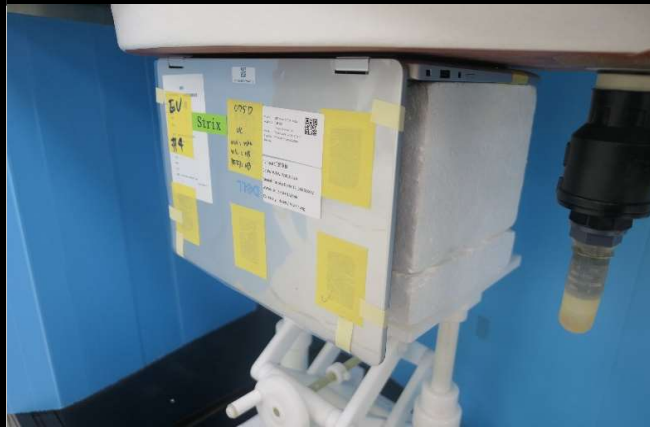

Bottom of Laptop Mode Tested at 0 mm



Rear Face of Tablet Mode Tested at 0 mm



Left Side of Tablet Mode Tested at 0 mm



Right Side of Tablet Mode Tested at 0 mm




Top Side of Tablet Mode Tested at 0 mm



Bottom Side of Tablet Mode Tested at 0 mm

<Photographs of Bottom Body SAR Test Setup>

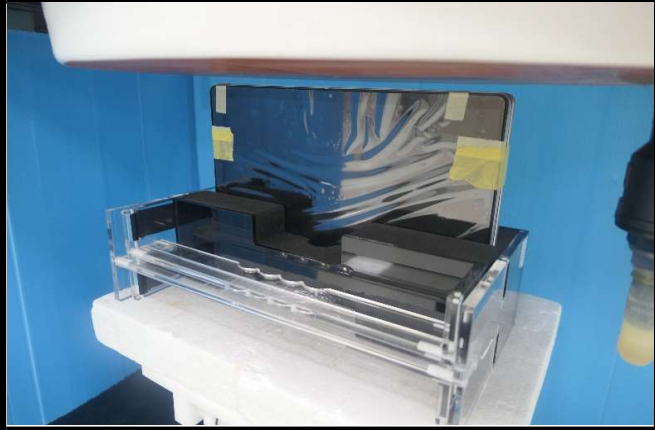

Top Side of Tablet Mode Tested at 10 mm

<Photographs of Power Density Test in Laptop Mode Setup>



Bottom of Laptop Mode Tested at 0 mm