

Plots of System Verification

Appendix A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Measurement Report
S01 System Check_H1900_250118
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D1900V2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	1900.000, 0	6.94	1.39	38.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	1.84	1.92
psSAR10g [W/kg]	0.994	1.01
Power Drift [dB]	0.11	0.03

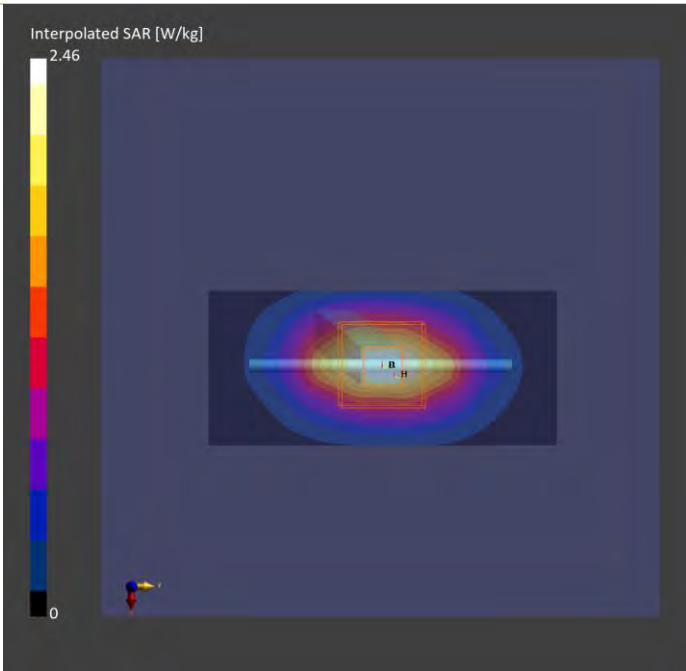

Plots of System Verification

Measurement Report
S02 System Check_H1750_250118
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D1750V2,	10.0 x 10.0 x 302.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	1750.000, 0	7.24	1.31	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	1.73	1.71
psSAR10g [W/kg]	0.920	0.913
Power Drift [dB]	-0.01	-0.02

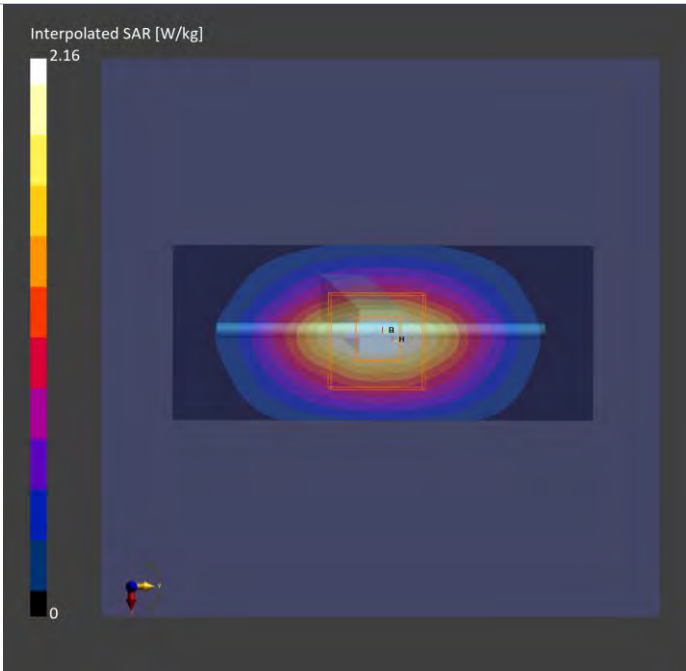

Plots of System Verification

Measurement Report
S03 System Check_H835_250119
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 340.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.000, 0	8.36	0.936	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.500	0.504
psSAR10g [W/kg]	0.333	0.331
Power Drift [dB]	-0.01	0.01

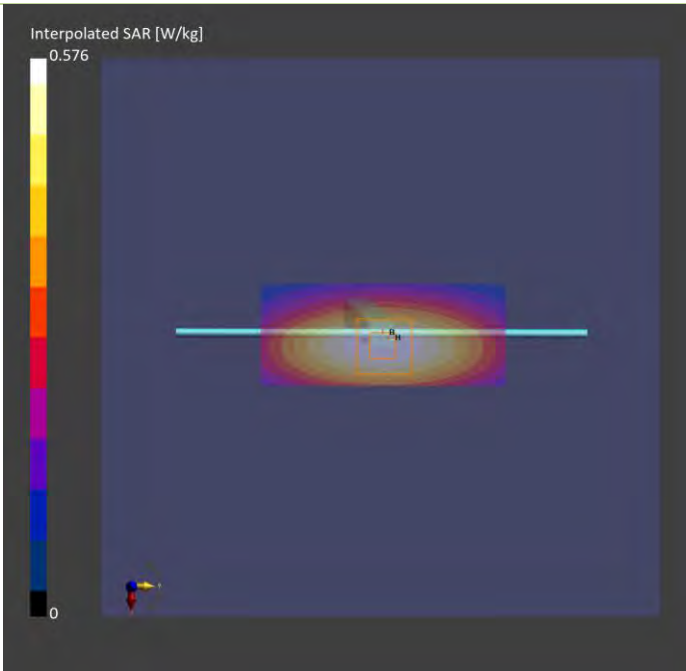

Plots of System Verification

Measurement Report
S04 System Check_H835_250119
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 340.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.000, 0	8.36	0.936	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.500	0.504
psSAR10g [W/kg]	0.333	0.331
Power Drift [dB]	-0.01	0.01

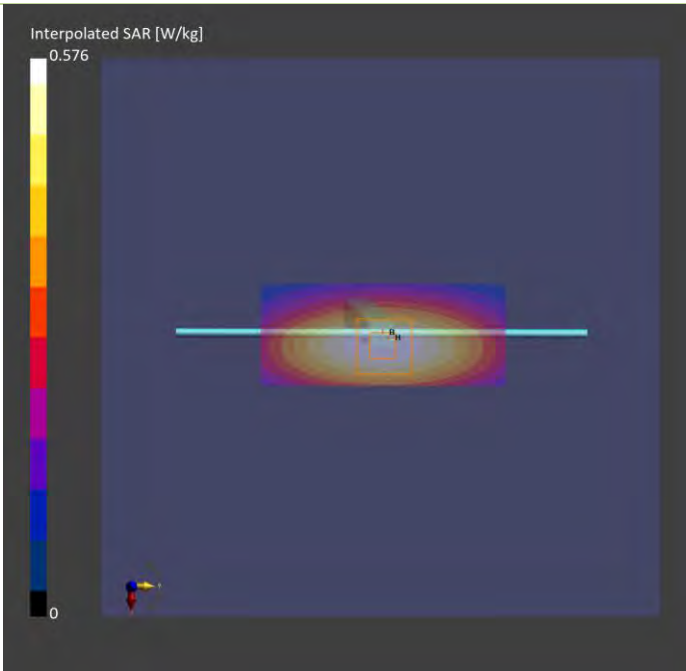

Plots of System Verification

Measurement Report
S05 System Check_H2600_250121
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D2600V2,	10.0 x 10.0 x 290.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2600.000, 0	6.65	1.89	37.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

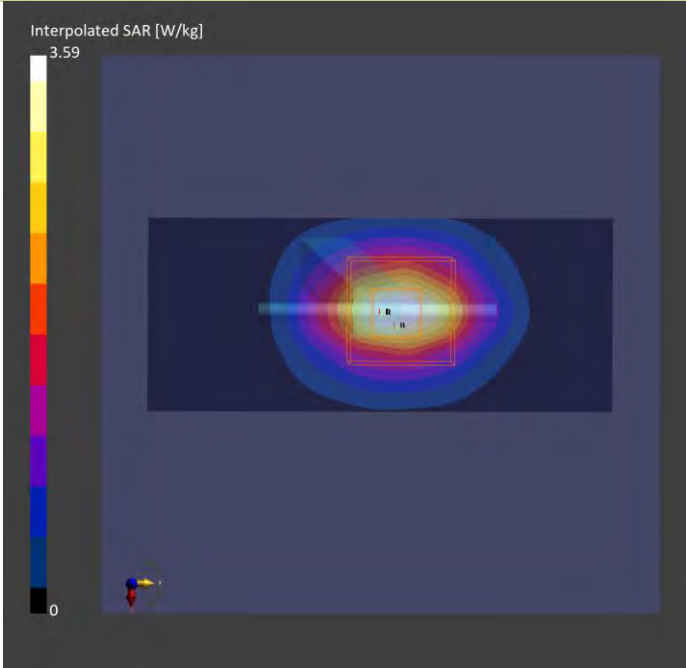

Plots of System Verification

Measurement Report
S06 System Check_H750_250120
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D750V3,	10.0 x 10.0 x 330.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,			CW, 0--	750.000, 0	8.34	0.905	40.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.427	0.424
psSAR10g [W/kg]	0.286	0.281
Power Drift [dB]	0.01	0.02

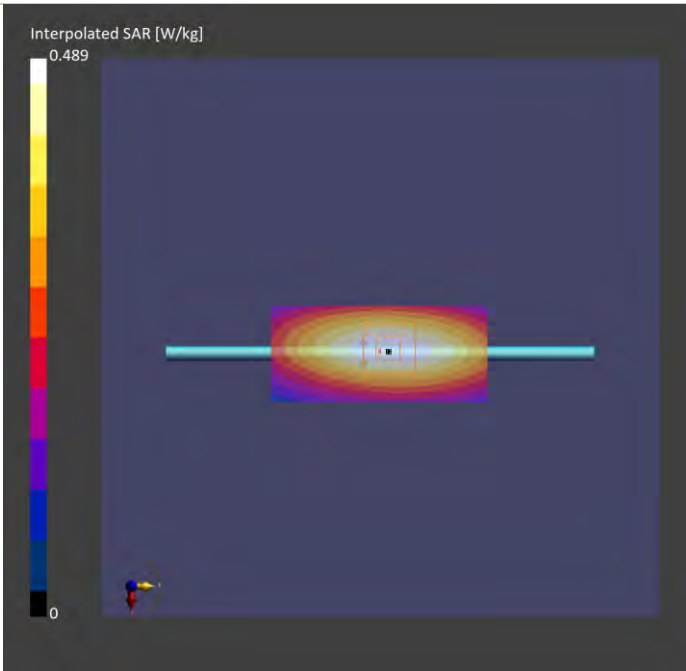

Plots of System Verification

Measurement Report
S07 System Check_H750_250120
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D750V3,	10.0 x 10.0 x 330.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,			CW, 0--	750.000, 0	8.34	0.905	40.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.427	0.424
psSAR10g [W/kg]	0.286	0.281
Power Drift [dB]	0.01	0.02

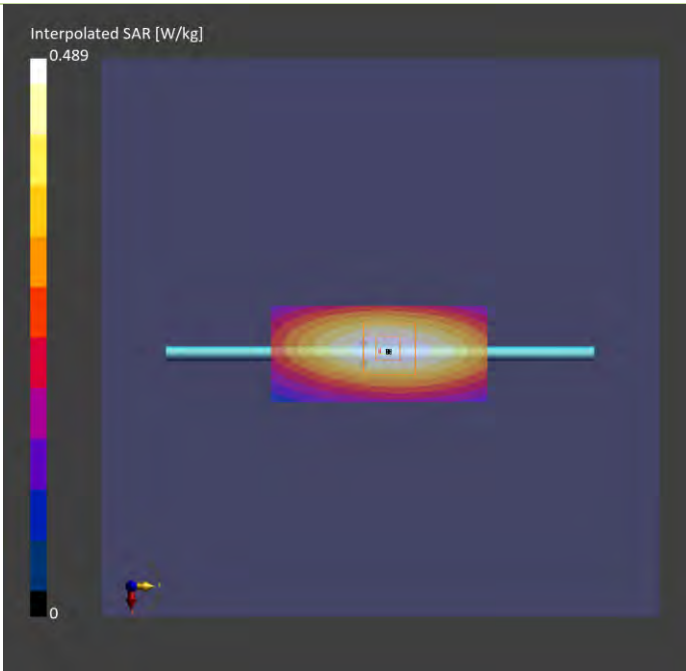

Plots of System Verification

Measurement Report
S08 System Check_H750_250120
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D750V3,	10.0 x 10.0 x 330.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,			CW, 0--	750.000, 0	8.34	0.905	40.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.427	0.424
psSAR10g [W/kg]	0.286	0.281
Power Drift [dB]	0.01	0.02

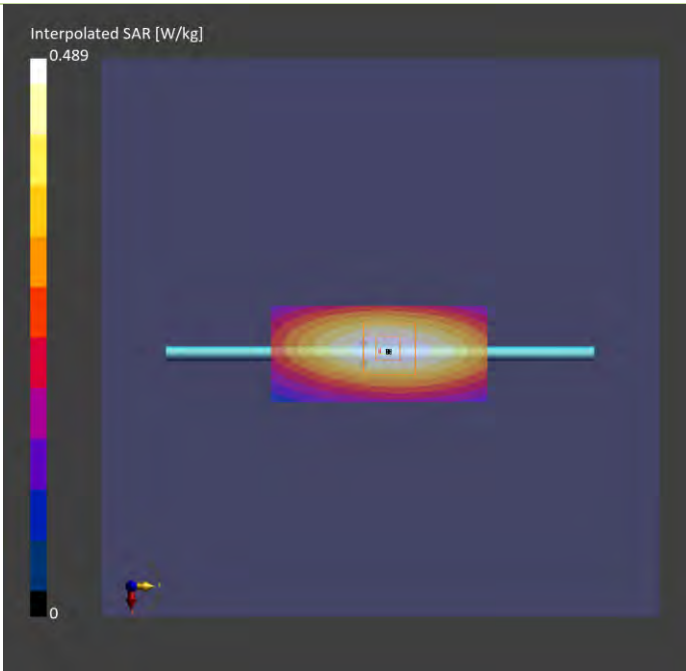

Plots of System Verification

Measurement Report
S09 System Check_H1900_250118
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D1900V2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	1900.000, 0	6.94	1.39	38.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	1.84	1.92
psSAR10g [W/kg]	0.994	1.01
Power Drift [dB]	0.11	0.03

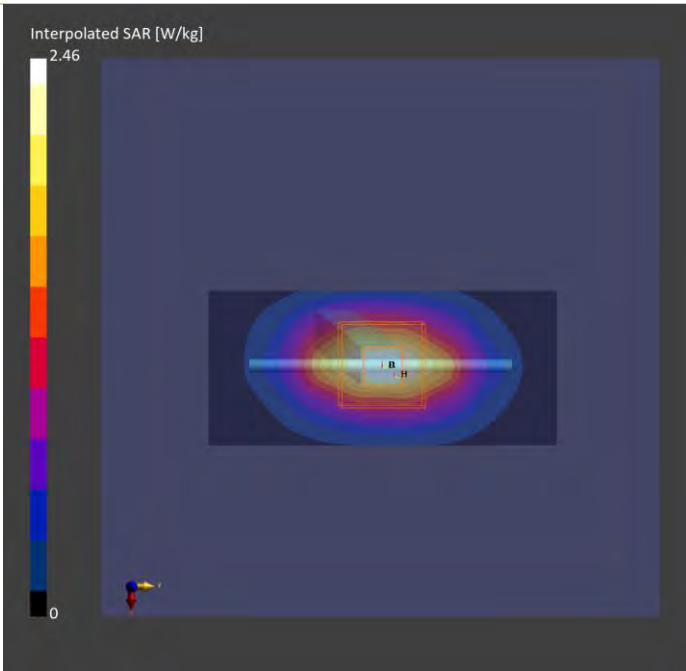

Plots of System Verification

Measurement Report
S10 System Check_H835_250119
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 340.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.000, 0	8.36	0.936	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.500	0.504
psSAR10g [W/kg]	0.333	0.331
Power Drift [dB]	-0.01	0.01

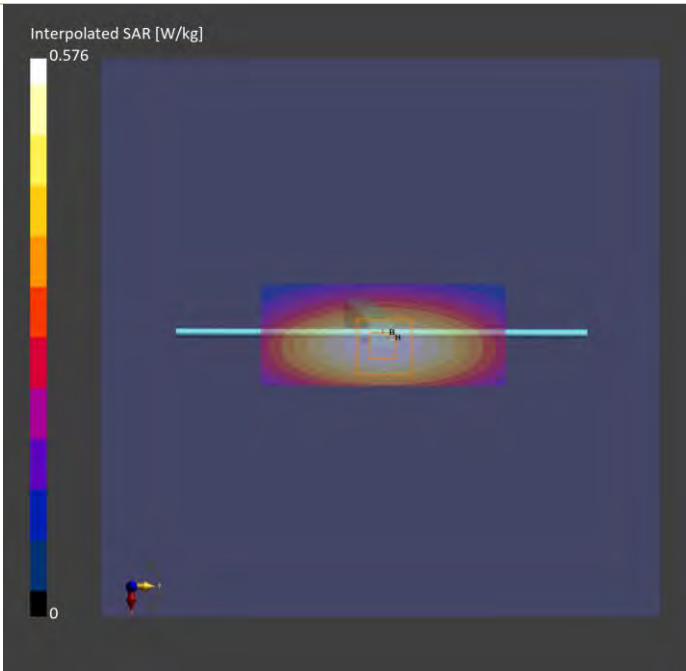

Plots of System Verification

Measurement Report
S23 System Check_H2600_250121
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D2600V2,	10.0 x 10.0 x 290.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2600.000, 0	6.65	1.89	37.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

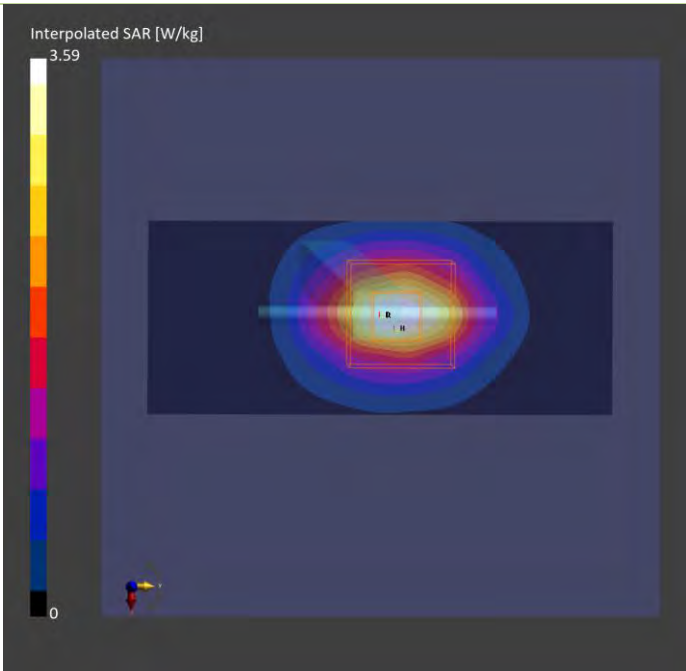

Plots of System Verification

Measurement Report
S11 System Check_H2600_250121
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D2600V2,	10.0 x 10.0 x 290.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2600.000, 0	6.65	1.89	37.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

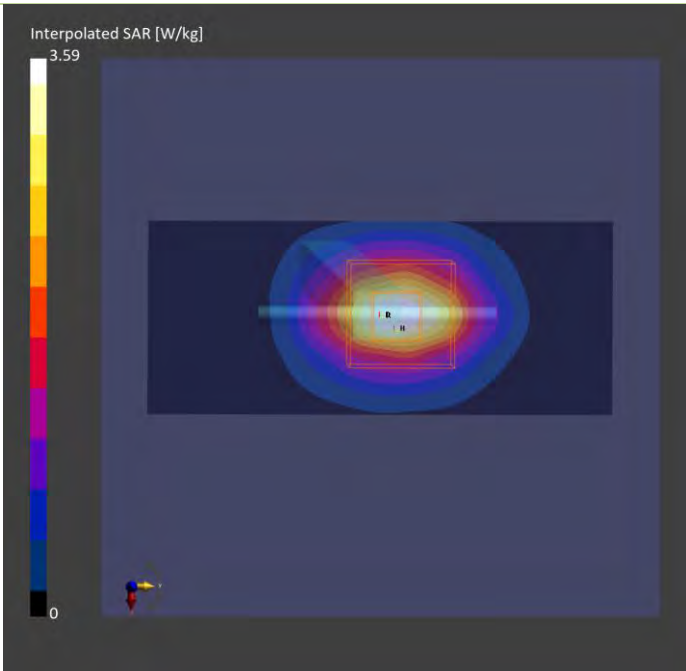

Plots of System Verification

Measurement Report
S12a System Check_H3500_250121
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D3500V2,	10.0 x 10.0 x 285.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	3500.000, 0	6.32	2.79	39.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H33T42N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	44.0 x 88.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	11.0 x 11.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	3.41	3.41
psSAR10g [W/kg]	1.33	1.34
Power Drift [dB]	0.05	0.03

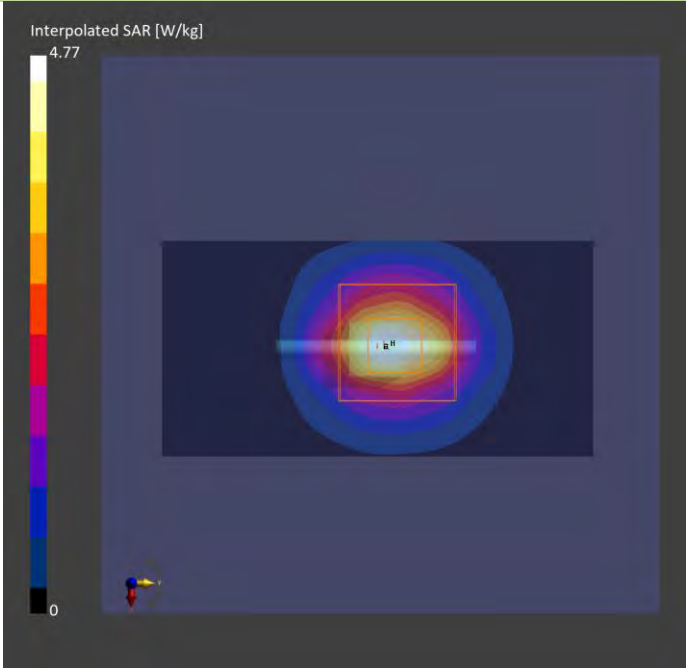

Plots of System Verification

Measurement Report
S12b System Check_H3700_250121
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D3700V2,	10.0 x 10.0 x 285.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	3700.000, 0	6.26	2.97	39.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H33T42N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	44.0 x 88.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	11.0 x 11.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	3.05	3.14
psSAR10g [W/kg]	1.11	1.13
Power Drift [dB]	-0.02	-0.08

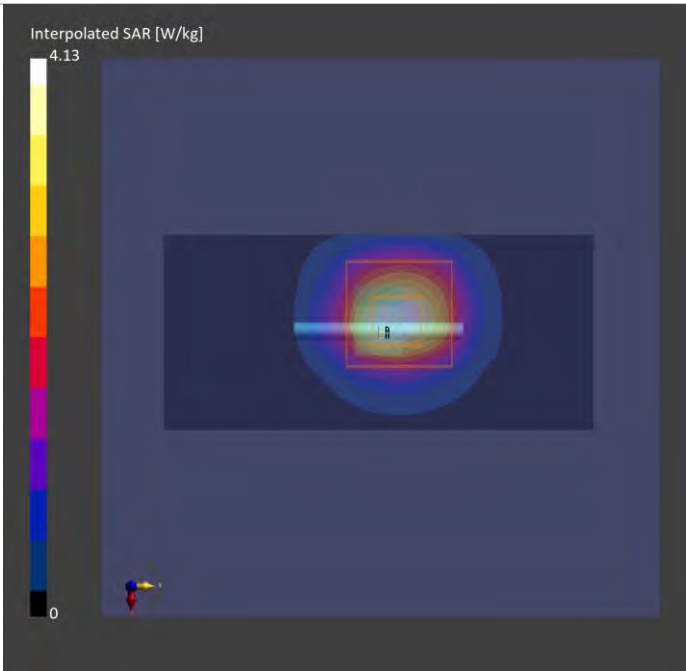

Plots of System Verification

Measurement Report
S13 System Check_H1750_250118
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D1750V2,	10.0 x 10.0 x 302.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	1750.000, 0	7.24	1.31	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	1.73	1.71
psSAR10g [W/kg]	0.920	0.913
Power Drift [dB]	-0.01	-0.02

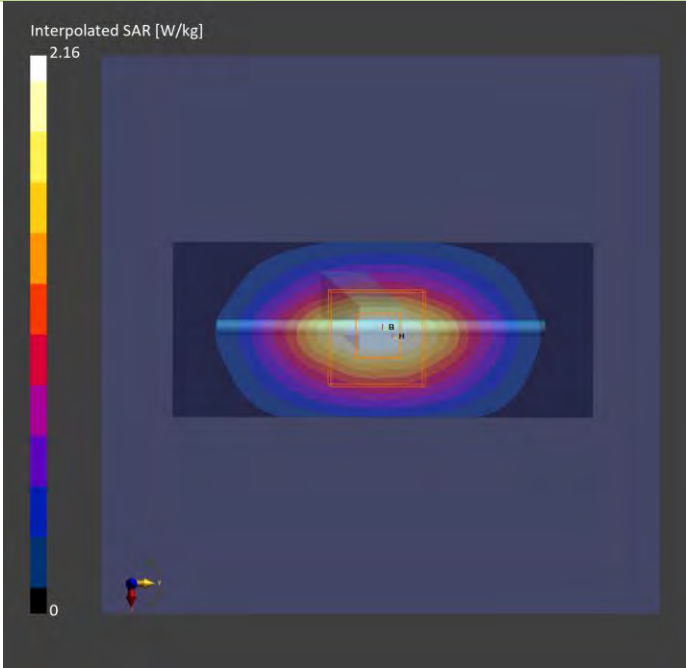

Plots of System Verification

Measurement Report
S14 System Check_H750_250120
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D750V3,	10.0 x 10.0 x 330.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,			CW, 0--	750.000, 0	8.34	0.905	40.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.427	0.424
psSAR10g [W/kg]	0.286	0.281
Power Drift [dB]	0.01	0.02

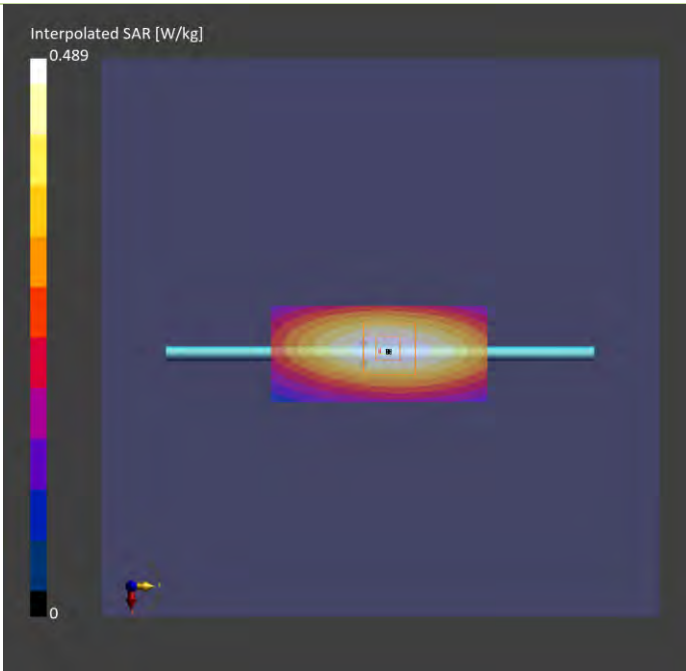

Plots of System Verification

Measurement Report
S15 System Check_H2450_250124
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D2450V2,	10.0 x 10.0 x 290.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2450.000, 0	6.71	1.81	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-24	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24	2025-01-24
psSAR1g [W/kg]	2.61	2.67
psSAR10g [W/kg]	1.18	1.26
Power Drift [dB]	0.03	0.06

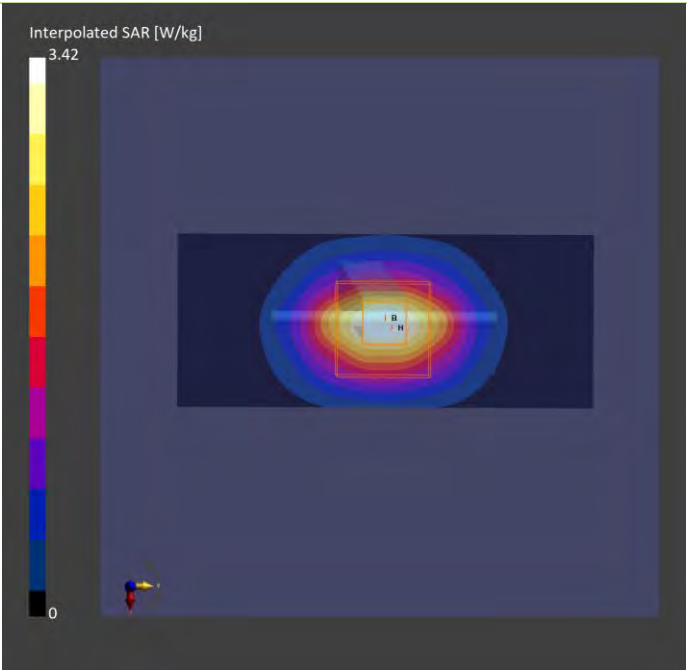

Plots of System Verification

Measurement Report
S16 System Check_H5250_250122
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D5GHzV2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5250.000, 0	5.16	4.50	34.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22	2025-01-22
psSAR1g [W/kg]	3.49	3.68
psSAR10g [W/kg]	0.985	1.11
Power Drift [dB]	0.01	0.03

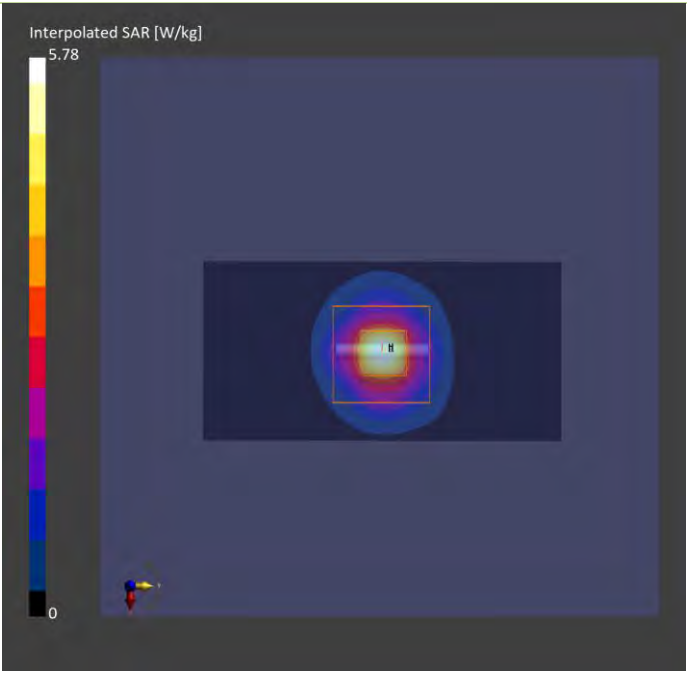

Plots of System Verification

Measurement Report
S17 System Check_H5600_250122
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D5GHzV2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5600.000, 0	4.49	4.87	34.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22	2025-01-22
psSAR1g [W/kg]	3.93	3.99
psSAR10g [W/kg]	1.10	1.12
Power Drift [dB]	0.04	0.03

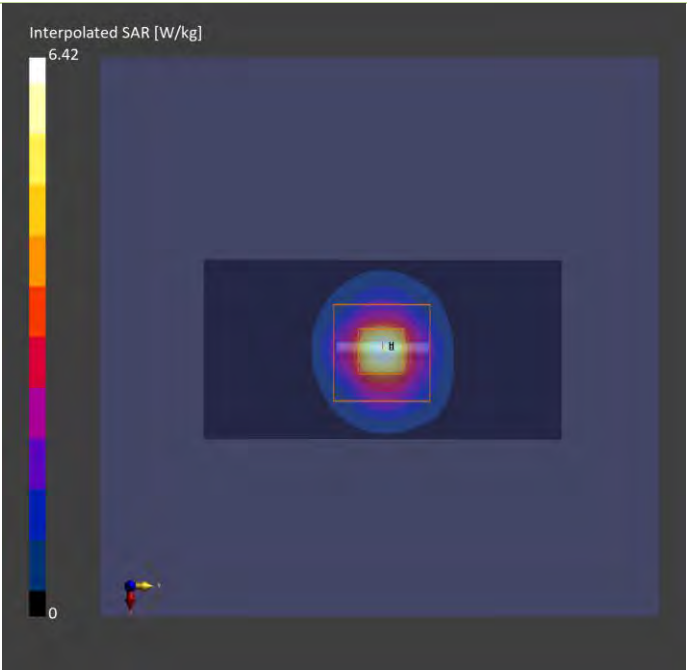

Plots of System Verification

Measurement Report
S19 System Check_H5800_250123
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D5GHzV2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.25	36.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-23	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23	2025-01-23
psSAR1g [W/kg]	3.66	3.73
psSAR10g [W/kg]	1.03	1.05
Power Drift [dB]	0.01	0.05

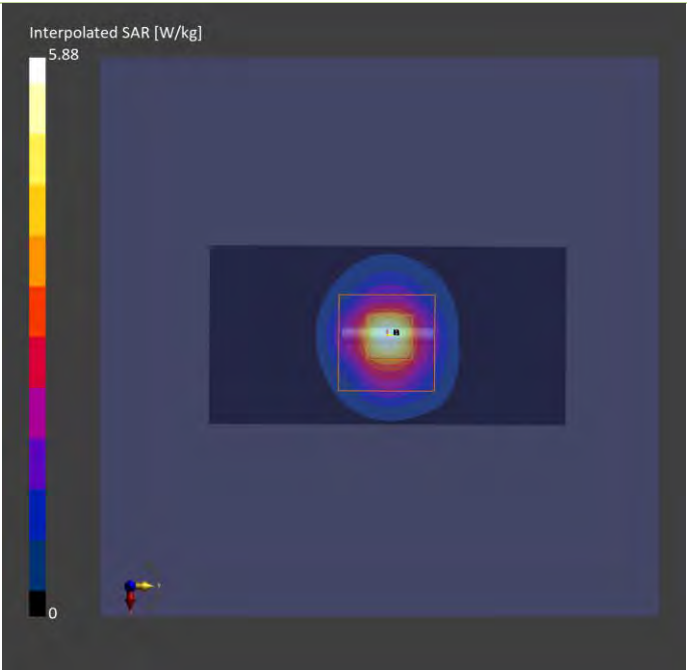

Plots of System Verification

Measurement Report
S20 System Check_H5800_250123
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D5GHzV2,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.25	36.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-23	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23	2025-01-23
psSAR1g [W/kg]	3.66	3.73
psSAR10g [W/kg]	1.03	1.05
Power Drift [dB]	0.01	0.05

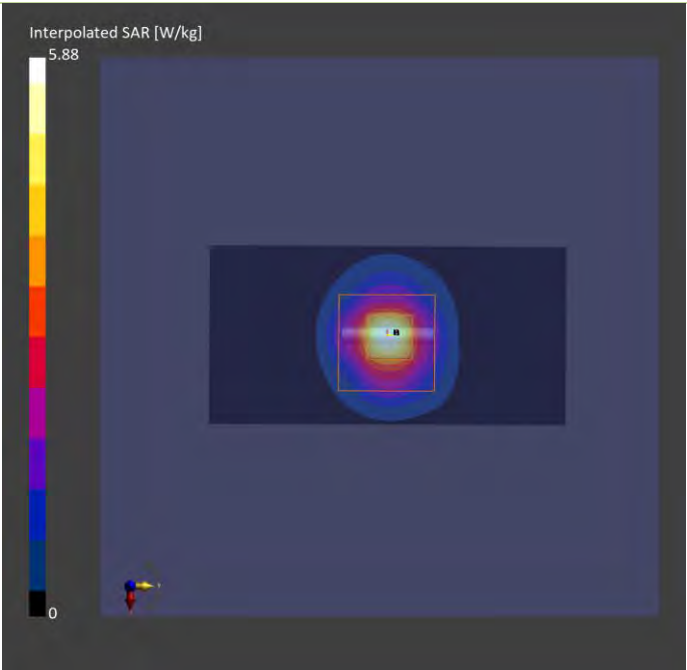

Plots of System Verification

Measurement Report
S21 System Check_H2450_250124
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D2450V2,	10.0 x 10.0 x 290.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2450.000, 0	6.71	1.81	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-24	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24	2025-01-24
psSAR1g [W/kg]	2.61	2.67
psSAR10g [W/kg]	1.18	1.26
Power Drift [dB]	0.03	0.06

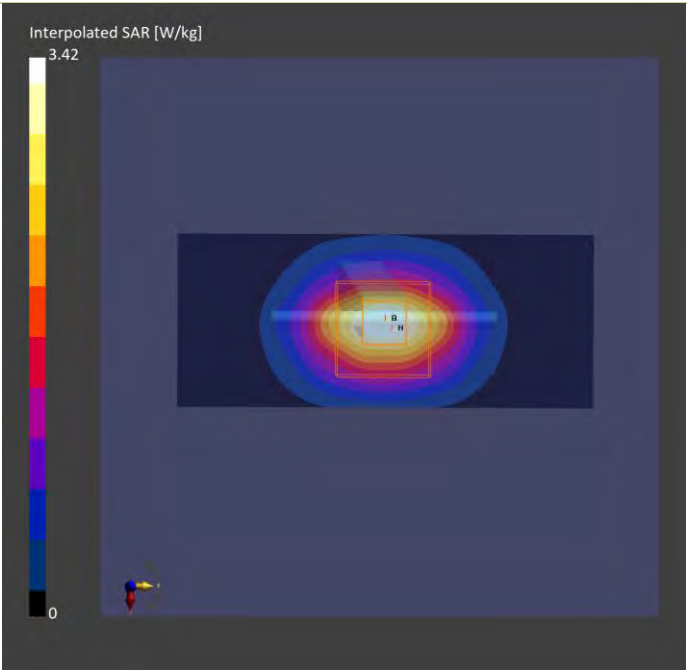

Plots of System Verification

Measurement Report
S22 System Check_H6500_250117
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D6.5GHzV2,	10.0 x 10.0 x 296.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	6500.000, 0	4.99	5.95	35.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H60T72N10 , 2025-Jan-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-17	2025-01-17
psSAR1g [W/kg]	26.7	29.4
psSAR10g [W/kg]	5.44	5.53
psAPD (1.0cm2, sq) [W/m2]		291
psAPD (4.0cm2, sq) [W/m2]		135
Power Drift [dB]	0.02	0.03

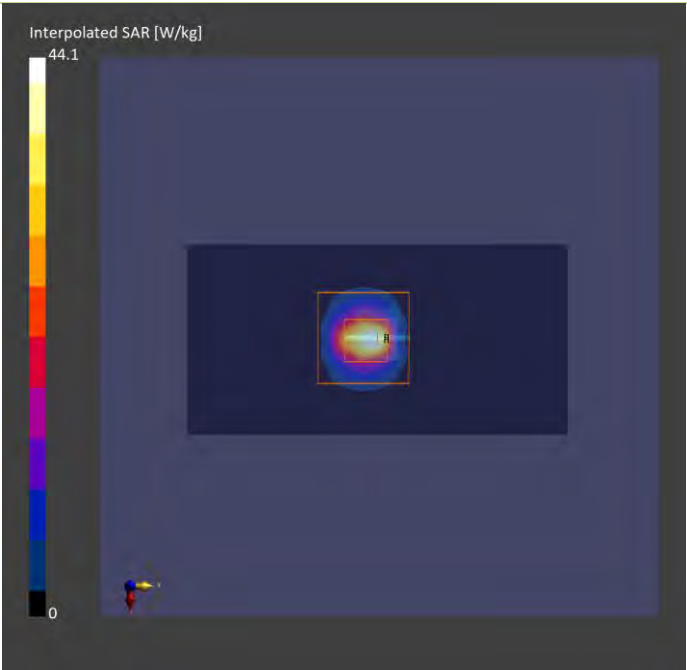

Plots of System Verification

Measurement Report
S22 PD_System Check_10 GHz_250113
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 100.0	SN: 1025	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10.00	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	---Air	EUmmWV4 - SN9438_F1-55GHz, 2024-07-19	DAE4 Sn1277, 2024-05-14

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2025-01-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	52.7
psPDtot+ [W/m ²]	52.9
psPDmod+ [W/m ²]	53.2
E _{max} [V/m]	146
Power Drift [dB]	0.11

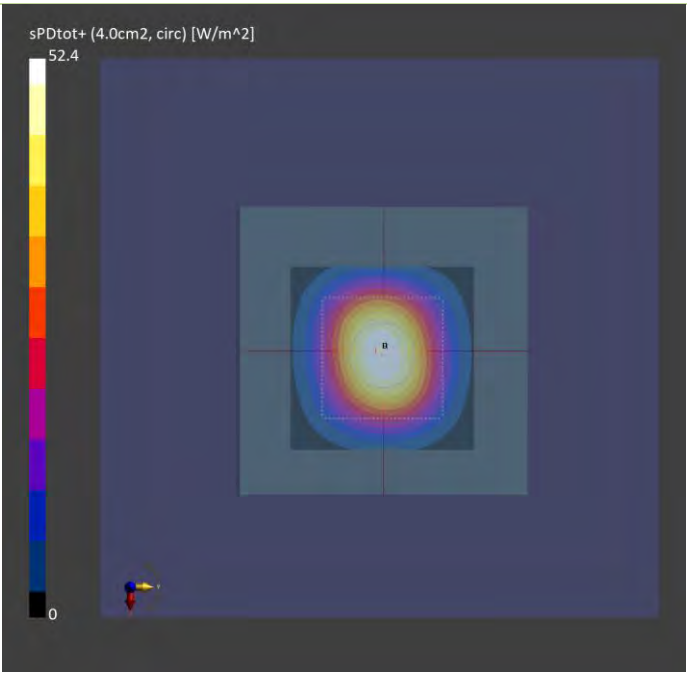

Appendix B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Measurement Report
P01 WCDMA II_RMC12.2K_Top Side of Tablet_0mm_Ch9400_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 2	WCDMA, 10011-CAC	1880.000, 9400	6.94	1.38	38.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	0.537	0.906
psSAR10g [W/kg]	0.296	0.405
Power Drift [dB]	0.01	0.03
M2/M1 [%]		46.2
Dist 3dB Peak [mm]		16.6

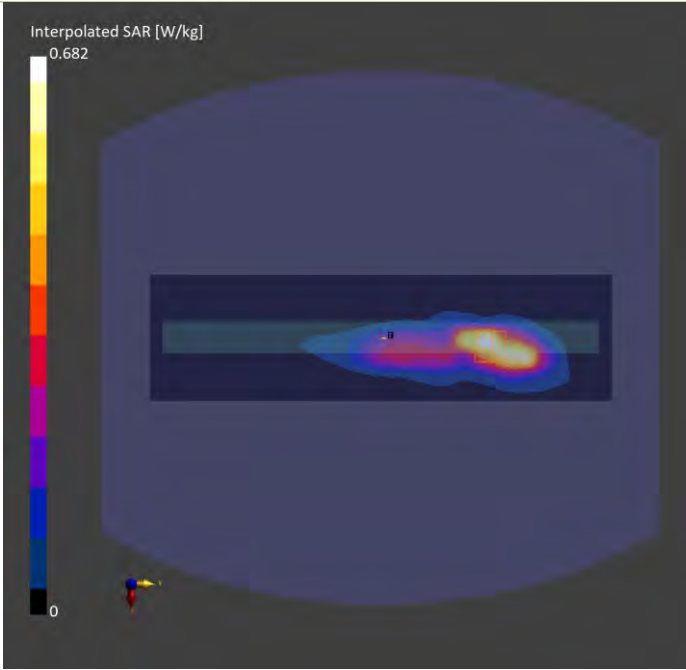

Plots of Measurement

Measurement Report
P02 WCDMA IV_RMC12.2K_Top Side of Tablet_0mm_Ch1413_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 4	WCDMA, 10011-CAC	1732.600, 1413	7.24	1.30	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	0.807	0.817
psSAR10g [W/kg]	0.390	0.374
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		50.5
Dist 3dB Peak [mm]		16.4

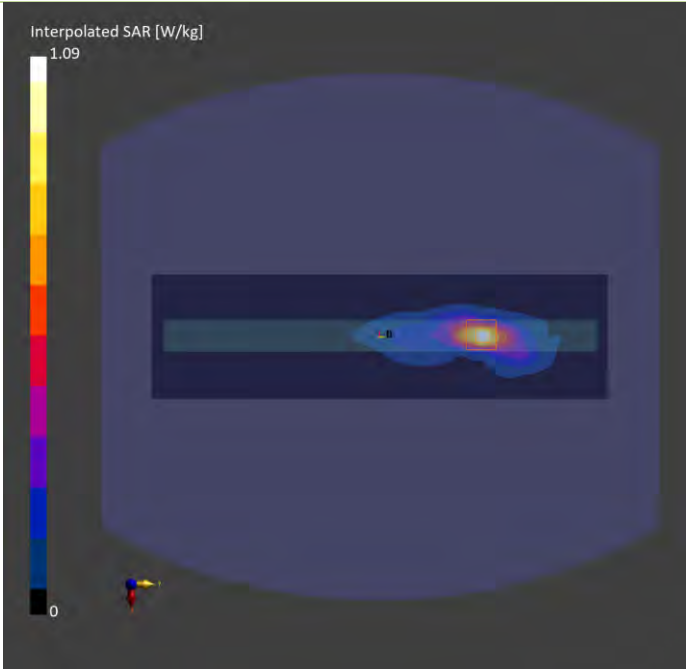

Plots of Measurement

Measurement Report

P03 WCDMA V_RMC12.2K_Top Side of Tablet_0mm_Ch4132_WNC_Main Ant 0_Power Reduction_w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 5	WCDMA, 10011-CAC	826.400, 4132	8.36	0.931	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.650	0.812
psSAR10g [W/kg]	0.380	0.391
Power Drift [dB]	0.04	0.01
M2/M1 [%]		47.5
Dist 3dB Peak [mm]		16.4

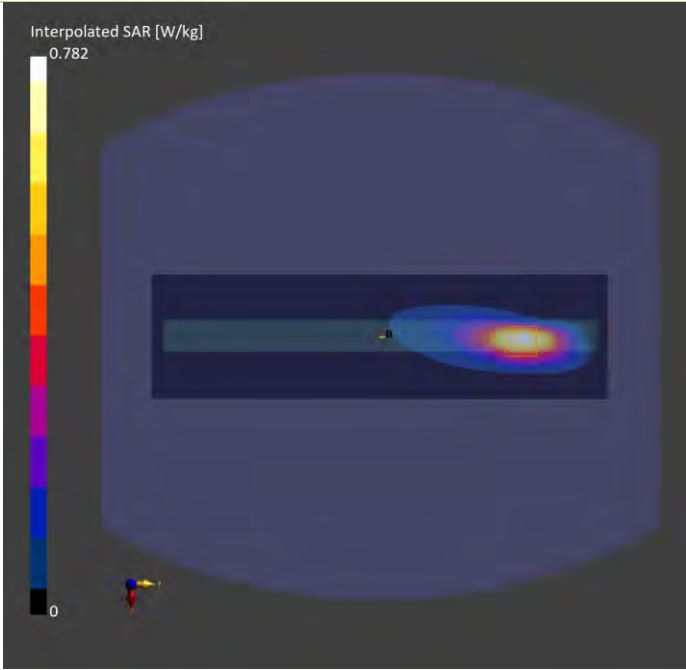

Plots of Measurement

Measurement Report

P04 LTE 5_QPSK10M_Top Side of Tablet_0mm_Ch20525_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 5	LTE-FDD, 10175-CAH	836.500, 20525	8.36	0.936	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.637	0.810
psSAR10g [W/kg]	0.378	0.387
Power Drift [dB]	0.01	-0.01
M2/M1 [%]		54.2
Dist 3dB Peak [mm]		8.1

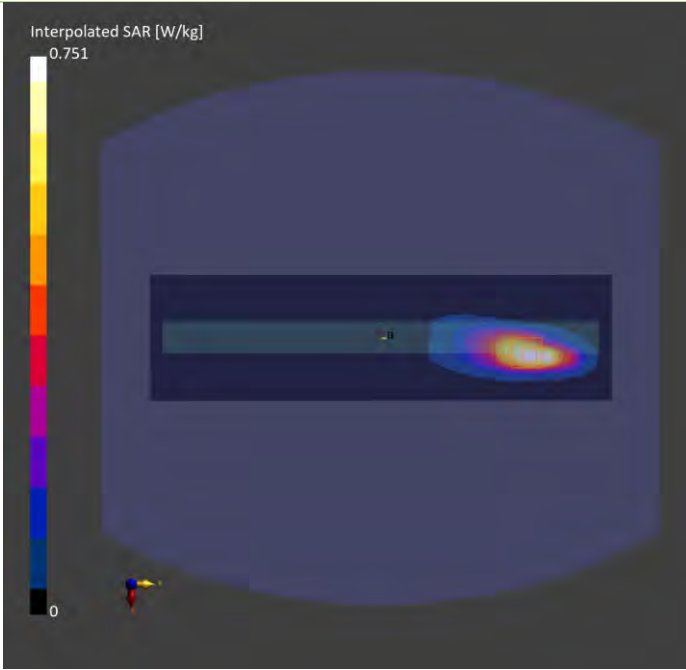

Plots of Measurement

Measurement Report
P05 LTE 7_QPSK20M_Top Side of Tablet_0mm_Ch21350_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 7	LTE-FDD, 10169-CAF	2560.000, 21350	6.65	1.87	37.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	0.422	0.535
psSAR10g [W/kg]	0.197	0.202
Power Drift [dB]	0.01	0.01
M2/M1 [%]		39.1
Dist 3dB Peak [mm]		5.9

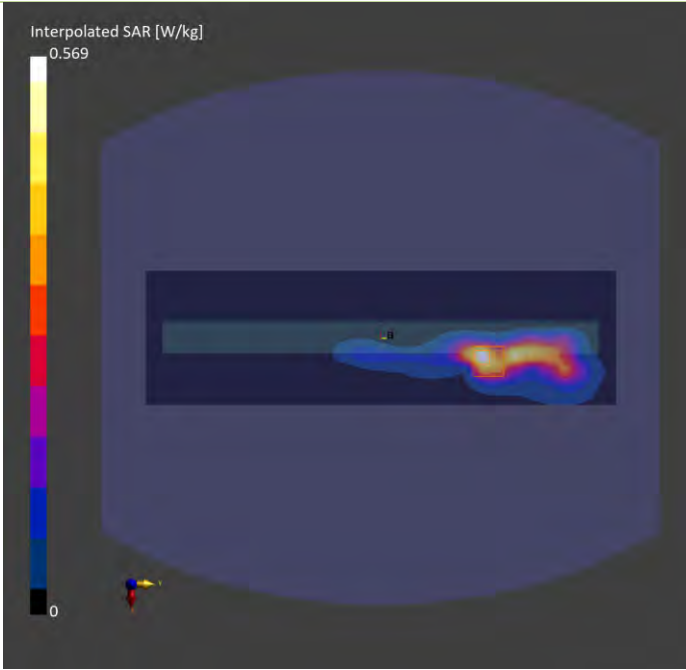

Plots of Measurement

Measurement Report

P06 LTE 12_QPSK10M_Top Side of Tablet_0mm_Ch23060_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 12	LTE-FDD, 10175-CAH	704.000, 23060	8.34	0.889	41.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.791	0.924
psSAR10g [W/kg]	0.474	0.462
Power Drift [dB]	-0.06	0.02
M2/M1 [%]		45.6
Dist 3dB Peak [mm]		8.1

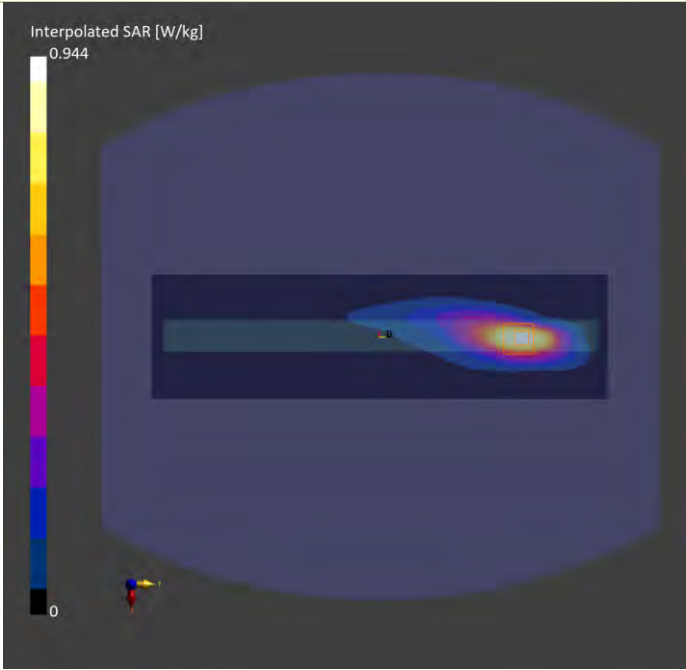

Plots of Measurement

Measurement Report

P07 LTE 13_QPSK10M_Top Side of Tablet_0mm_Ch23230_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 13	LTE-FDD, 10175-CAH	782.000, 23230	8.34	0.910	40.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.924	1.10
psSAR10g [W/kg]	0.548	0.541
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		45.6
Dist 3dB Peak [mm]		17.2

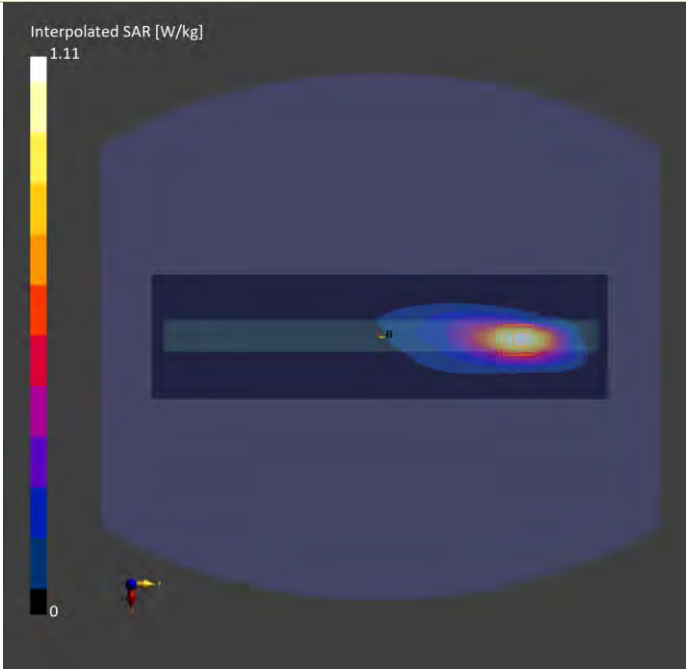

Plots of Measurement

Measurement Report

P08 LTE 14_QPSK10M_Top Side of Tablet_0mm_Ch23330_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 14	LTE-FDD, 10175-CAH	793.000, 23330	8.34	0.914	40.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	0.771	0.937
psSAR10g [W/kg]	0.458	0.460
Power Drift [dB]	0.04	-0.04
M2/M1 [%]		45.5
Dist 3dB Peak [mm]		16.6

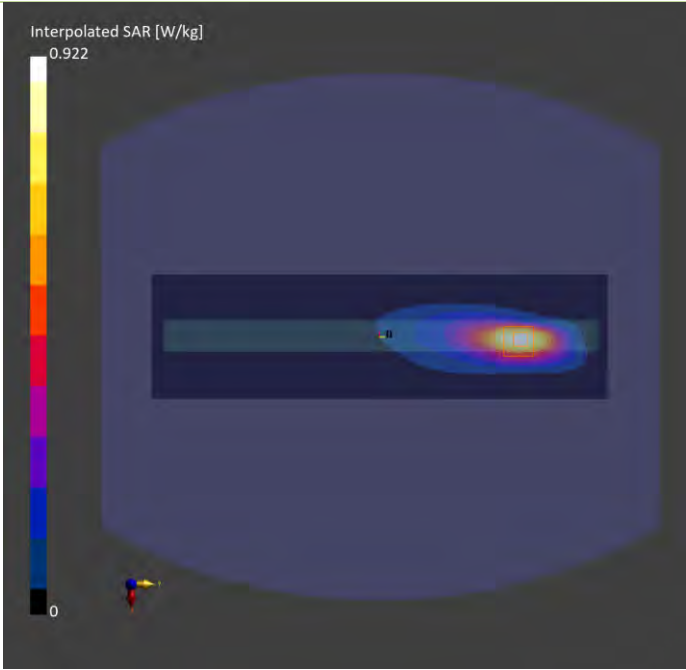

Plots of Measurement

Measurement Report

P09 LTE 25_QPSK20M_Top Side of Tablet_0mm_Ch26590_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 25	LTE-FDD, 10169-CAF	1905.000, 26590	6.94	1.39	38.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	0.621	1.10
psSAR10g [W/kg]	0.351	0.489
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		46.4
Dist 3dB Peak [mm]		16.4

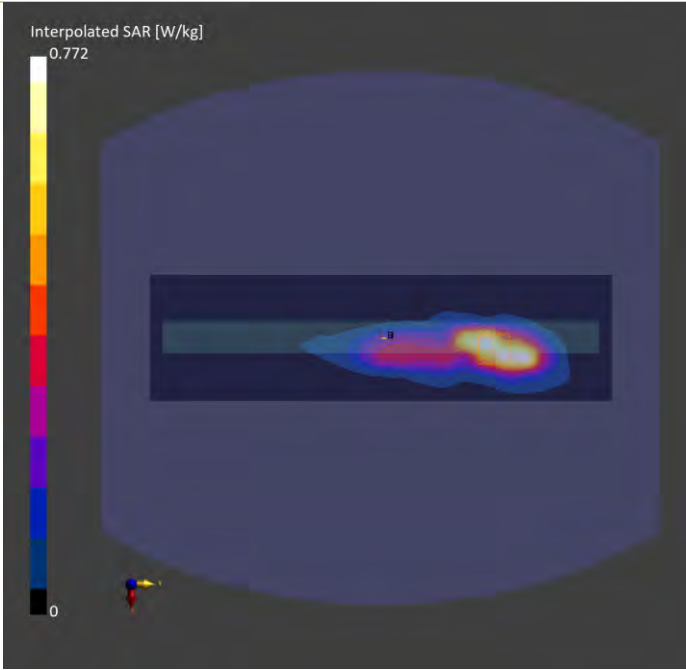

Plots of Measurement

Measurement Report

P10 LTE 26_QPSK15M_Top Side of Tablet_0mm_Ch26865_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 26	LTE-FDD, 10181-CAF	831.500, 26865	8.36	0.934	43.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-19	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19	2025-01-19
psSAR1g [W/kg]	0.777	0.979
psSAR10g [W/kg]	0.454	0.470
Power Drift [dB]	0.03	-0.01
M2/M1 [%]		48.1
Dist 3dB Peak [mm]		8.1

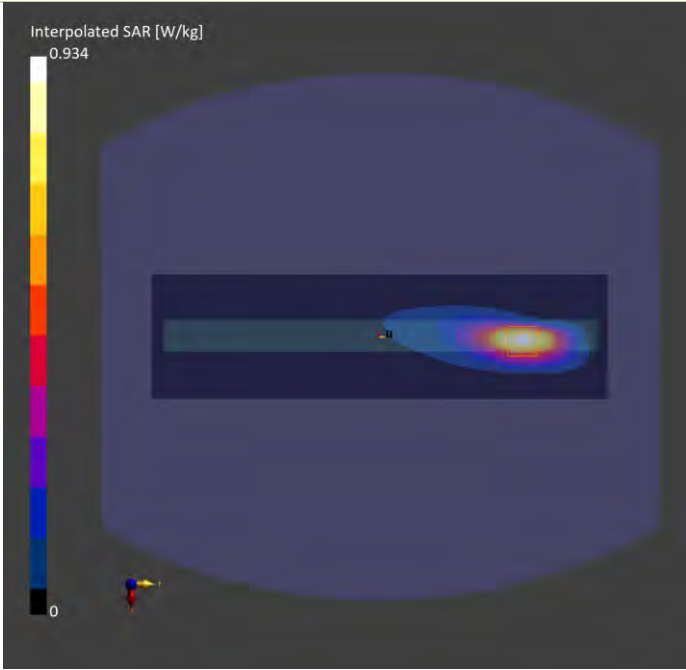

Plots of Measurement

Measurement Report

P23 LTE 38_QPSK20M_Top Side of Tablet_0mm_Ch38000_1RB_OS0_WNC_Main Ant 0_Power Reduction_w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 38	LTE-TDD, 10172-CAH	2595.000, 38000	6.65	1.89	37.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	0.612	0.662
psSAR10g [W/kg]	0.239	0.248
Power Drift [dB]	-0.07	-0.02
M2/M1 [%]		45.1
Dist 3dB Peak [mm]		5.9

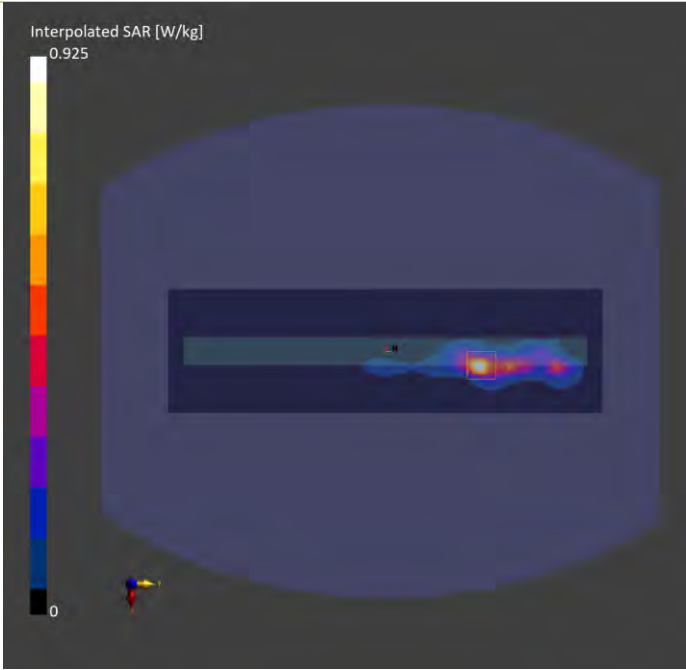

Plots of Measurement

Measurement Report

P11 LTE 41_QPSK20M_Top Side of Tablet_0mm_Ch41055_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 41	LTE-TDD, 10172-CAH	2636.500, 41055	6.65	1.92	37.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	0.461	0.579
psSAR10g [W/kg]	0.217	0.223
Power Drift [dB]	0.03	-0.01
M2/M1 [%]		42.2
Dist 3dB Peak [mm]		6.8

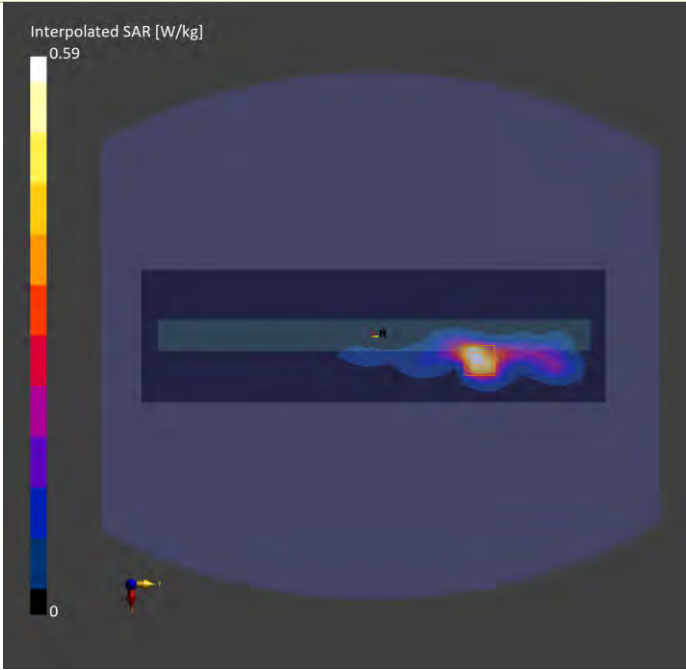

Plots of Measurement

Measurement Report

P12 LTE 48_QPSK20M_Top Side of Tablet_0mm_Ch56640_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 48	LTE-TDD, 10172-CAH	3690.000, 56640	6.26	2.97	39.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H33T42N10 , 2025-Jan-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 336.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21	2025-01-21
psSAR1g [W/kg]	0.637	1.13
psSAR10g [W/kg]	0.217	0.287
Power Drift [dB]	0.02	0.04
M2/M1 [%]		58.8
Dist 3dB Peak [mm]		5.4

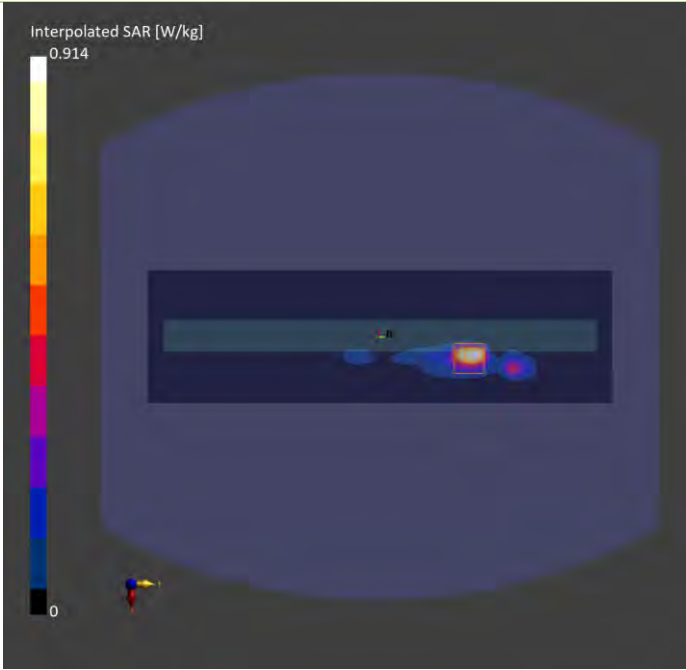

Plots of Measurement

Measurement Report

P13 LTE 66_QPSK20M_Top Side of Tablet_0mm_Ch132322_1RB_OS0_WNC_Main Ant 0_Power Reduction_w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 66	LTE-FDD, 10169-CAF	1745.000, 132322	7.24	1.30	39.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H14T19N10 , 2025-Jan-18	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-18	2025-01-18
psSAR1g [W/kg]	0.926	0.948
psSAR10g [W/kg]	0.448	0.433
Power Drift [dB]	-0.01	-0.04
M2/M1 [%]		50.6
Dist 3dB Peak [mm]		16.4

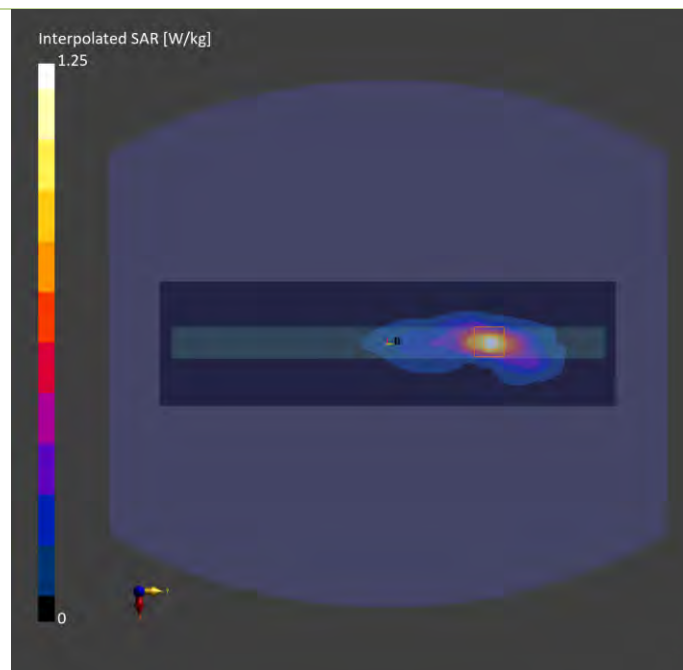

Plots of Measurement

Measurement Report

P14 LTE 71_QPSK20M_Top Side of Tablet_0mm_Ch133222_1RB_OS0_WNC_Main Ant 0_Power Reduction_w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side of Tablet, 0.00	Band 71	LTE-FDD, 10169-CAF	673.000, 133222	8.34	0.873	41.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H06T09N10 , 2025-Jan-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-20	2025-01-20
psSAR1g [W/kg]	1.06	1.07
psSAR10g [W/kg]	0.641	0.598
Power Drift [dB]	-0.01	0.01
M2/M1 [%]		45.4
Dist 3dB Peak [mm]		8.1

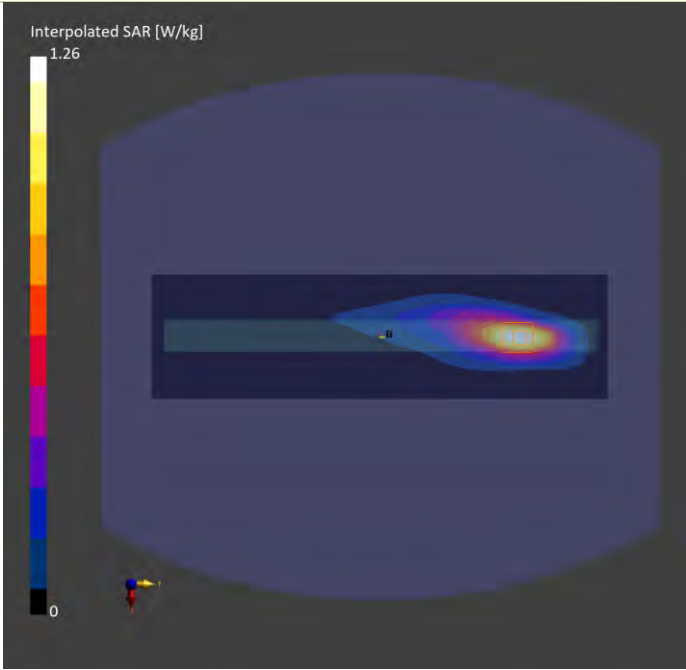

Plots of Measurement

Measurement Report
P15 WLAN2.4G_802.11b_Rear Face of Tablet_0mm_Ch6_HB_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face of Tablet, 0.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	6.71	1.80	39.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-24	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24	2025-01-24
psSAR1g [W/kg]	0.922	0.722
psSAR10g [W/kg]	0.408	0.305
Power Drift [dB]	-0.01	0.06
M2/M1 [%]		44.6
Dist 3dB Peak [mm]		6.5

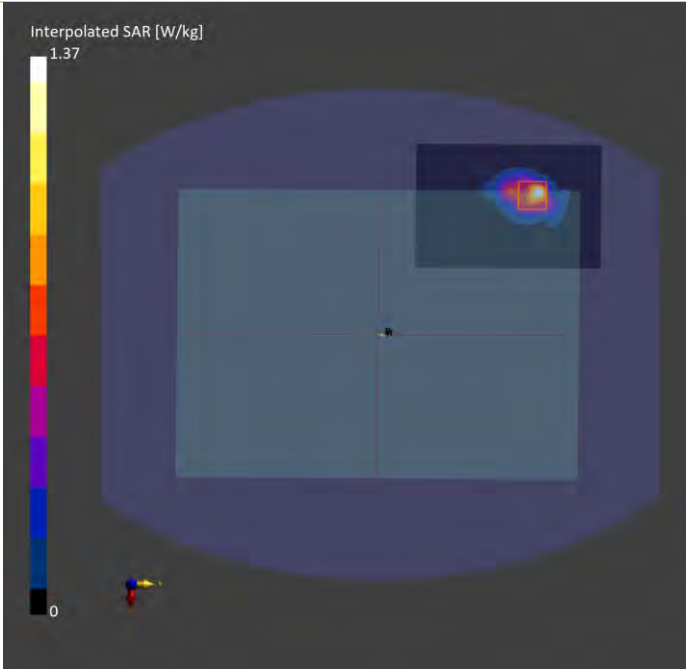

Plots of Measurement

Measurement Report

P16 WLAN5.3G_802.11ac VHT160_Bottom of Laptop_0mm_Ch50_HB_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5250.000, 50	5.16	4.50	34.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22	2025-01-22
psSAR1g [W/kg]	0.634	0.639
psSAR10g [W/kg]	0.235	0.228
Power Drift [dB]	0.12	0.03
M2/M1 [%]		65.8
Dist 3dB Peak [mm]		7.9

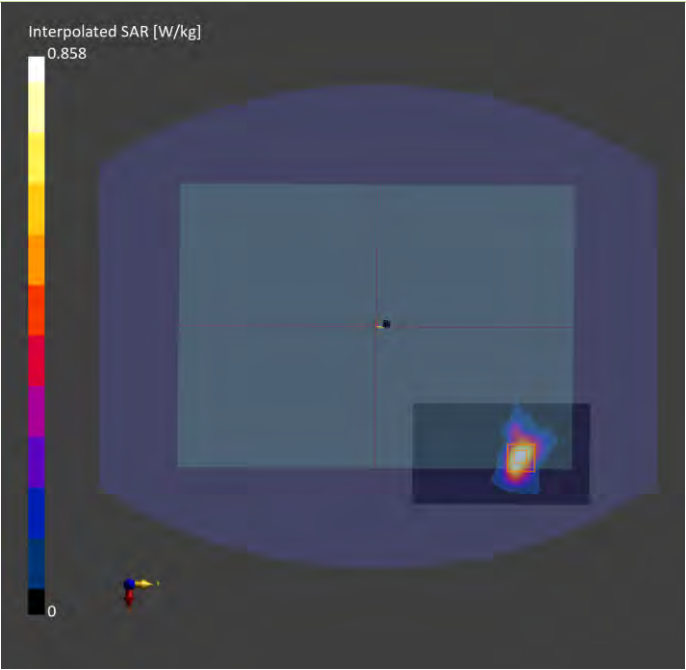

Plots of Measurement

Measurement Report
P17 WLAN5.6G_802.11ac VHT160_Bottom of Laptop_0mm_Ch114_HB_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5570.000, 114	4.49	4.84	34.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22	2025-01-22
psSAR1g [W/kg]	0.597	0.619
psSAR10g [W/kg]	0.223	0.214
Power Drift [dB]	0.19	0.09
M2/M1 [%]		64.6
Dist 3dB Peak [mm]		8.7

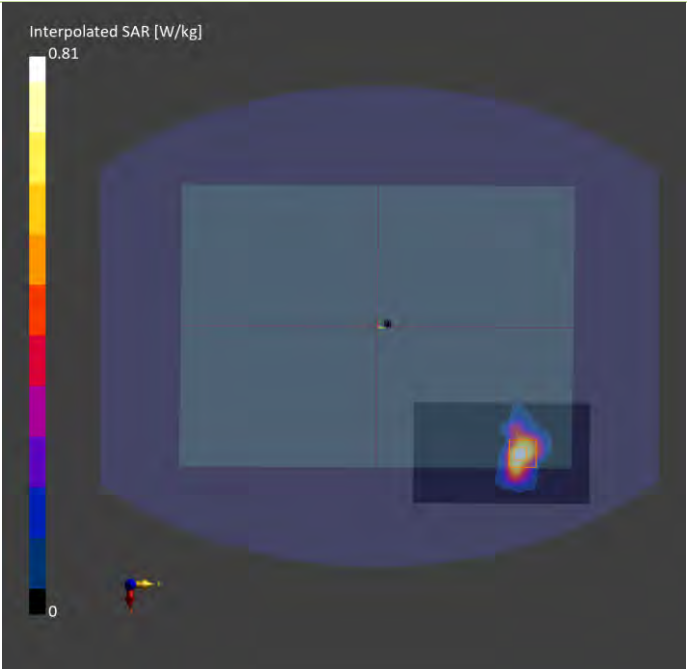

Plots of Measurement

Measurement Report

P19 WLAN5.8G_802.11ac VHT80_Bottom of Laptop_0mm_Ch155_HB_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	4.31	5.22	36.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-23	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23	2025-01-23
psSAR1g [W/kg]	0.636	0.620
psSAR10g [W/kg]	0.225	0.209
Power Drift [dB]	0.10	-0.03
M2/M1 [%]		60.8
Dist 3dB Peak [mm]		8.3

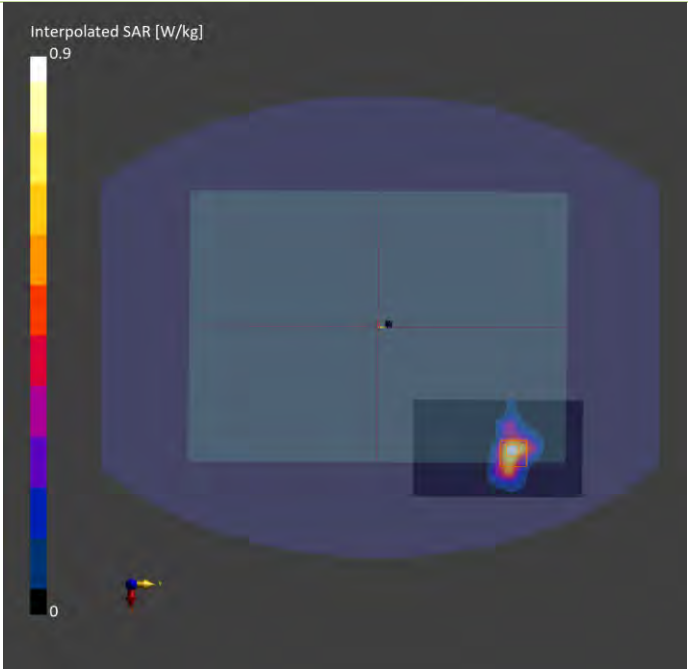

Plots of Measurement

Measurement Report
P20 WLAN5.9G_802.11ac VHT160_Bottom of Laptop_0mm_Ch163_HB_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5815.000, 163	4.31	5.27	36.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T60N10 , 2025-Jan-23	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23	2025-01-23
psSAR1g [W/kg]	0.554	0.592
psSAR10g [W/kg]	0.204	0.191
Power Drift [dB]	0.10	-0.14
M2/M1 [%]		59.5
Dist 3dB Peak [mm]		8.3

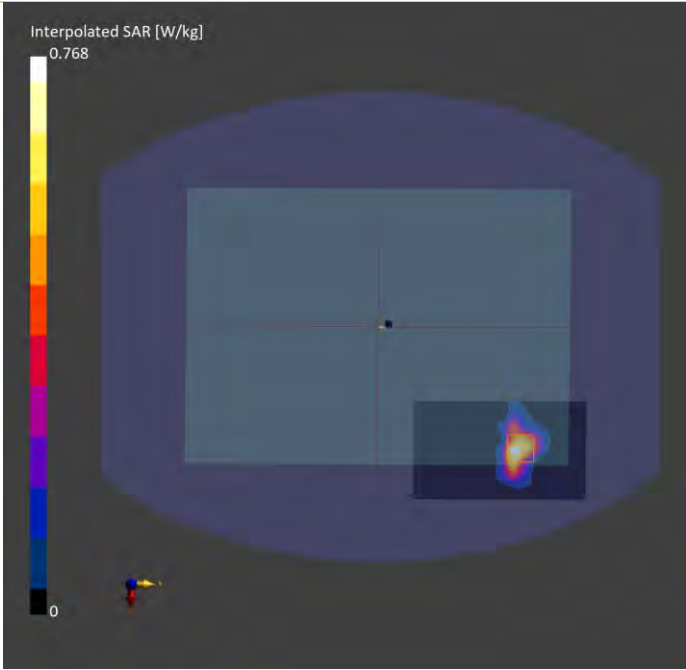

Plots of Measurement

Measurement Report
P21 BT_BDR_Bottom of Laptop_0mm_Ch0_HB_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.000, 0	6.71	1.77	39.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H19T27N10 , 2025-Jan-24	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24	2025-01-24
psSAR1g [W/kg]	0.093	0.101
psSAR10g [W/kg]	0.044	0.042
Power Drift [dB]	-0.08	0.05
M2/M1 [%]		51.9
Dist 3dB Peak [mm]		5.9

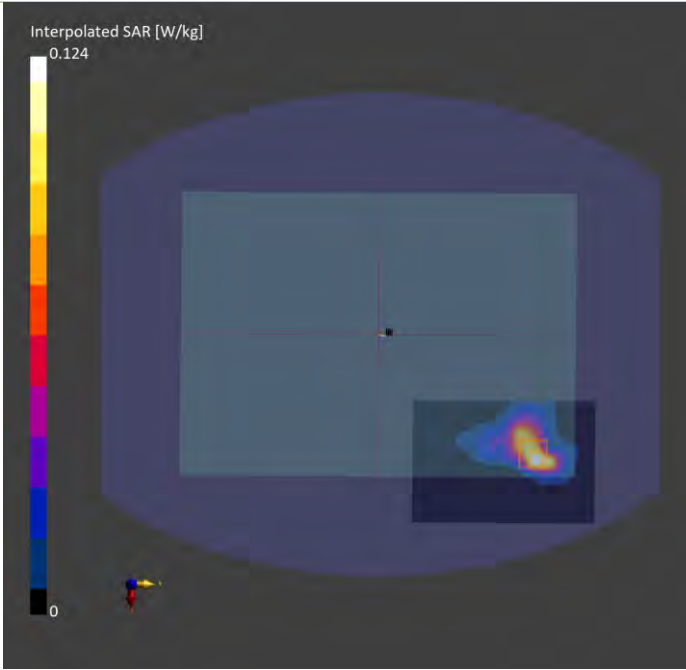

Plots of Measurement

Measurement Report
P22 UNII-5_802.11ax HE160_Bottom of Laptop_0mm_Ch15_HB_Ant 0
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110624,	312.0 x 224.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom of Laptop, 0.00	U-NII-5	WLAN, 10755-AAC	6025.000, 15	4.99	5.38	36.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H60T72N10 , 2025-Jan-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1590, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	75.0 x 135.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-17	2025-01-17
psSAR1g [W/kg]	0.632	0.689
psSAR10g [W/kg]	0.241	0.256
psAPD (1.0cm2, sq) [W/m2]		6.32
psAPD (4.0cm2, sq) [W/m2]		5.00
Power Drift [dB]	0.16	0.01
M2/M1 [%]		52.9
Dist 3dB Peak [mm]		9.3

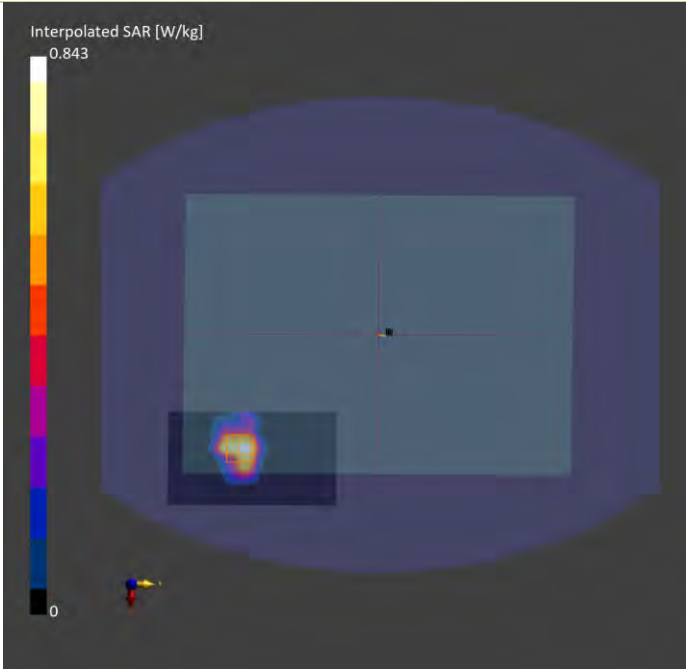

Plots of Measurement

Measurement Report
P22 PD UNII-5_802.11ax HE160_Bottom of Laptop_0mm_Ch15_HB_Ant 0
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
P24110623,	312.0 x 224.0 x 15.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom of Laptop, 2.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	---Air	EUmmWV4 - SN9438_F1-55GHz, 2024-07-19	DAE4 Sn1277, 2024-05-14

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0502 x 0.0502
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2025-01-17
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.88
psPDtot+ [W/m ²]	3.13
psPDmod+ [W/m ²]	3.70
E _{max} [V/m]	57.8
Power Drift [dB]	-0.02

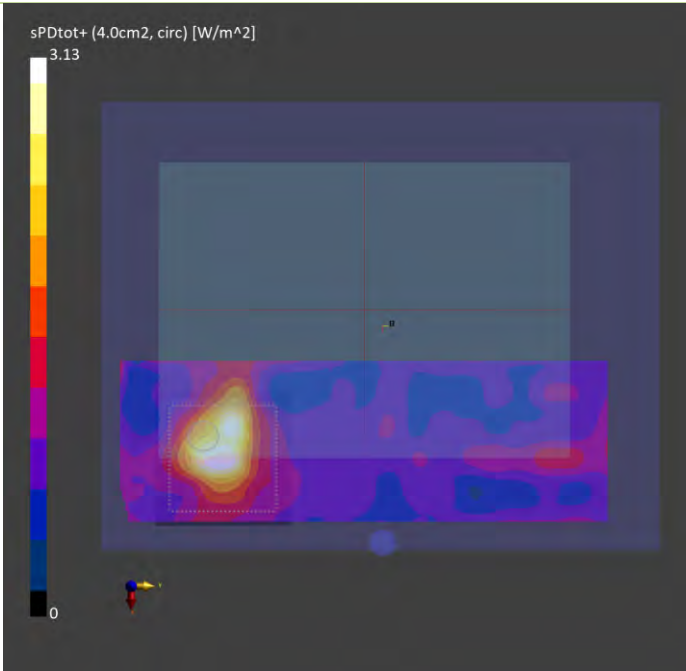

Appendix C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within ± 10 % of the target values. Liquid temperature during the SAR testing has kept within ± 2 °C.
2. For Section 4.4, The SAR measurement system was validated according to procedures in FCC KDB 865664 D0. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Appendix A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Check					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dBm)
S01	1900	22.1	1.39	38.8	1.4	40	-0.71	-3.00	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 18, 2025	1900	40.30	1.92	38.31	-4.94	5d036	7736	1590	17
S02	1750	22.1	1.31	39	1.37	40.1	-4.38	-2.74	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 18, 2025	1750	37.00	1.71	34.12	-7.79	1055	7736	1590	17
S03	835	22.4	0.936	43	0.9	41.5	4.00	3.61	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 19, 2025	835	9.44	0.504	10.06	6.53	4d121	7736	1590	17
S04	835	22.4	0.936	43	0.9	41.5	4.00	3.61	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 19, 2025	835	9.44	0.504	10.06	6.53	4d121	7736	1590	17
S05	2600	22	1.89	37.7	1.96	39	-3.57	-3.33	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 21, 2025	2600	55.70	2.76	55.07	-1.13	1020	7736	1590	17
S06	750	22.2	0.905	40.9	0.9	42	0.56	-2.62	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 20, 2025	750	8.36	0.424	8.46	1.20	1013	7736	1590	17
S07	750	22.2	0.905	40.9	0.9	42	0.56	-2.62	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 20, 2025	750	8.36	0.424	8.46	1.20	1013	7736	1590	17
S08	750	22.2	0.905	40.9	0.9	42	0.56	-2.62	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 20, 2025	750	8.36	0.424	8.46	1.20	1013	7736	1590	17
S09	1900	22.1	1.39	38.8	1.4	40	-0.71	-3.00	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 18, 2025	1900	40.30	1.92	38.31	-4.94	5d036	7736	1590	17
S10	835	22.4	0.936	43	0.9	41.5	4.00	3.61	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 19, 2025	835	9.44	0.504	10.06	6.53	4d121	7736	1590	17
S23	2600	22	1.89	37.7	1.96	39	-3.57	-3.33	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 21, 2025	2600	55.70	2.76	55.07	-1.13	1020	7736	1590	17
S11	2600	22	1.89	37.7	1.96	39	-3.57	-3.33	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 21, 2025	2600	55.70	2.76	55.07	-1.13	1020	7736	1590	17
S12a	3500	22	2.79	39.6	2.91	37.9	-4.12	4.49	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 21, 2025	3500	64.90	3.41	68.04	4.84	1007	7736	1590	17
S12b	3700	22	2.97	39.3	3.12	37.7	-4.81	4.24	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 21, 2025	3700	65.60	3.14	62.65	-4.50	1017	7736	1590	17
S13	1750	22.1	1.31	39	1.37	40.1	-4.38	-2.74	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 18, 2025	1750	37.00	1.71	34.12	-7.79	1055	7736	1590	17
S14	750	22.2	0.905	40.9	0.9	42	0.56	-2.62	Pass	Pass	Pass	N/A	N/A	N/A	Jan. 20, 2025	750	8.36	0.424	8.46	1.20	1013	7736	1590	17
S15	2450	22.3	1.81	39	1.8	39.2	0.56	-0.51	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 24, 2025	2450	52.90	2.67	53.27	0.71	737	7736	1590	17
S16	5250	22.3	4.5	34.8	4.71	35.9	-4.46	-3.06	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 22, 2025	5250	80.20	3.68	73.43	-8.45	1019	7736	1590	17
S17	5600	22.3	4.87	34.2	5.07	35.5	-3.94	-3.66	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 22, 2025	5600	82.90	3.99	79.61	-3.97	1019	7736	1590	17
S19	5800	22.1	5.25	36.5	5.27	35.3	-0.38	3.40	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 23, 2025	5800	80.30	3.73	74.42	-7.32	1019	7736	1590	17
S20	5800	22.1	5.25	36.5	5.27	35.3	-0.38	3.40	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 23, 2025	5800	80.30	3.73	74.42	-7.32	1019	7736	1590	17
S21	2450	22.3	1.81	39	1.8	39.2	0.56	-0.51	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 24, 2025	2450	52.90	2.67	53.27	0.71	737	7736	1590	17
S22	6500	22.3	5.95	35.6	6.07	34.5	-1.98	3.19	Pass	Pass	Pass	OFDM	Pass	Pass	Jan. 17, 2025	6500	303.00	29.4	294.00	-2.97	1008	7736	1590	20

System Performance Check for Incident Power Density Measurement

Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]
S22	Jan. 13, 2025	10	9438	1025	4	10.0	56.2	52.9	-5.87%

Appendix D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WCDMA Max. Tune-up Power (Full)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	25.0	25.0
WCDMA Band IV	25.0	25.0
WCDMA Band V	25.0	25.0

LTE Max. Tune-up Power (Full)			
Mode	QPSK	16QAM	64QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.5	23.5	22.5
LTE 4	24.5	23.5	22.5
LTE 5	25.5	24.5	23.5
LTE 7	24.5	23.5	22.5
LTE 12	25.5	24.5	23.5
LTE 13	25.5	24.5	23.5
LTE 14	25.5	24.5	23.5
LTE 25	24.5	23.5	22.5
LTE 26	25.5	24.5	23.5
LTE 38	24.5	23.5	22.5
LTE 41	24.5	23.5	22.5
LTE 48	22.0	21.0	20.0
LTE 66	24.5	23.5	22.5
LTE 71	25.5	24.5	23.5

WCDMA Max. Tune-up Power (Reduction)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	20.0	20.0
WCDMA Band IV	20.5	20.5
WCDMA Band V	20.0	20.0

LTE Max. Tune-up Power (Reduction)			
Mode	QPSK	16QAM	64QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	20.5	19.5	18.5
LTE 4	21.0	20.0	19.0
LTE 5	20.0	19.0	18.0
LTE 7	19.0	18.0	17.0
LTE 12	22.5	21.5	20.5
LTE 13	22.5	21.5	20.5
LTE 14	22.5	21.5	20.5
LTE 25	20.5	19.5	18.5
LTE 26	20.0	19.0	18.0
LTE 38	21.5	20.5	19.5
LTE 41	20.0	19.0	18.0
LTE 48	15.0	14.0	13.0
LTE 66	21.0	20.0	19.0
LTE 71	24.0	23.0	22.0

Tune-up Power (NB mode)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11g	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11ax HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11ax HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11be EHT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11be EHT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	16.0	16.0	18.5
	11	2462	15.5	15.5	16.0	16.0	18.5

Tune-up Power (NB mode)					
Bluetooth					
Mode	Channel	Frequency		Ant 1 Max Tune-up	
BR / EDR	0	2402		11.5	
	39	2441		11.5	
	78	2480		11.5	
LE	0	2402		11.5	
	19	2440		11.5	
	39	2480		11.5	

Tune-up Power (NB mode)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11n HT20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11n HT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ac VHT20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11ac VHT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	42	5210	14.5	14.5	14.5	14.5	17.5
802.11ax HE20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11ax HE40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	42	5210	14.5	14.5	14.5	14.5	17.5
802.11be EHT20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11be EHT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11be EHT80	42	5210	14.5	14.5	14.5	14.5	17.5

Tune-up Power (NB mode)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11n HT20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11n HT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11ac VHT20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11ac VHT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	58	5290	14.5	14.5	14.5	14.5	17.5
802.11ac VHT160	50	5250	14.5	14.5	14.5	14.5	17.5
802.11ax HE20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11ax HE40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	58	5290	14.5	14.5	14.5	14.5	17.5
802.11ax HE160	50	5250	14.5	14.5	14.5	14.5	17.5
802.11be EHT20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11be EHT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11be EHT80	58	5290	14.5	14.5	14.5	14.5	17.5
802.11be EHT160	50	5250	14.5	14.5	14.5	14.5	17.5

Tune-up Power (NB mode)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	14.0	14.0	14.0	14.0	17.0
	116	5580	14.0	14.0	14.0	14.0	17.0
	120	5600	14.0	14.0	14.0	14.0	17.0
	124	5620	14.0	14.0	14.0	14.0	17.0
	132	5660	14.0	14.0	14.0	14.0	17.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	14.0	14.0	14.0	14.0	17.0
802.11n HT20	100	5500	14.0	14.0	14.0	14.0	17.0
	116	5580	14.0	14.0	14.0	14.0	17.0
	120	5600	14.0	14.0	14.0	14.0	17.0
	124	5620	14.0	14.0	14.0	14.0	17.0
	132	5660	14.0	14.0	14.0	14.0	17.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	14.0	14.0	14.0	14.0	17.0
802.11n HT40	102	5510	14.0	14.0	14.0	14.0	17.0
	110	5550	14.0	14.0	14.0	14.0	17.0
	118	5590	14.0	14.0	14.0	14.0	17.0
	126	5630	14.0	14.0	14.0	14.0	17.0
	134	5670	14.0	14.0	14.0	14.0	17.0
	142	5710	14.0	14.0	14.0	14.0	17.0
	100	5500	14.0	14.0	14.0	14.0	17.0
802.11ac VHT20	116	5580	14.0	14.0	14.0	14.0	17.0
	120	5600	14.0	14.0	14.0	14.0	17.0
	124	5620	14.0	14.0	14.0	14.0	17.0
	132	5660	14.0	14.0	14.0	14.0	17.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	14.0	14.0	14.0	14.0	17.0
	102	5510	14.0	14.0	14.0	14.0	17.0
802.11ac VHT40	110	5550	14.0	14.0	14.0	14.0	17.0
	118	5590	14.0	14.0	14.0	14.0	17.0
	126	5630	14.0	14.0	14.0	14.0	17.0
	134	5670	14.0	14.0	14.0	14.0	17.0
	142	5710	14.0	14.0	14.0	14.0	17.0
	106	5530	14.0	14.0	14.0	14.0	17.0
	122	5610	14.0	14.0	14.0	14.0	17.0
802.11ac VHT80	138	5690	14.0	14.0	14.0	14.0	17.0
	114	5570	14.0	14.0	14.0	14.0	17.0
802.11ac VHT160	100	5500	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	116	5580	14.0	14.0	14.0	14.0	17.0
	120	5600	14.0	14.0	14.0	14.0	17.0
	124	5620	14.0	14.0	14.0	14.0	17.0
	132	5660	14.0	14.0	14.0	14.0	17.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	14.0	14.0	14.0	14.0	17.0
	102	5510	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	110	5550	14.0	14.0	14.0	14.0	17.0
	118	5590	14.0	14.0	14.0	14.0	17.0
	126	5630	14.0	14.0	14.0	14.0	17.0
	134	5670	14.0	14.0	14.0	14.0	17.0
	142	5710	14.0	14.0	14.0	14.0	17.0
	106	5530	14.0	14.0	14.0	14.0	17.0
	122	5610	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	138	5690	14.0	14.0	14.0	14.0	17.0
	114	5570	14.0	14.0	14.0	14.0	17.0
802.11ax HE160	100	5500	14.0	14.0	14.0	14.0	17.0
802.11be EHT20	116	5580	14.0	14.0	14.0	14.0	17.0
	120	5600	14.0	14.0	14.0	14.0	17.0
	124	5620	14.0	14.0	14.0	14.0	17.0
	132	5660	14.0	14.0	14.0	14.0	17.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	14.0	14.0	14.0	14.0	17.0
	102	5510	14.0	14.0	14.0	14.0	17.0
802.11be EHT40	110	5550	14.0	14.0	14.0	14.0	17.0
	118	5590	14.0	14.0	14.0	14.0	17.0
	126	5630	14.0	14.0	14.0	14.0	17.0
	134	5670	14.0	14.0	14.0	14.0	17.0
	142	5710	14.0	14.0	14.0	14.0	17.0
	106	5530	14.0	14.0	14.0	14.0	17.0
	122	5610	14.0	14.0	14.0	14.0	17.0
802.11be EHT80	138	5690	14.0	14.0	14.0	14.0	17.0
	114	5570	14.0	14.0	14.0	14.0	17.0
802.11be EHT160	100	5500	14.0	14.0	14.0	14.0	17.0

Tune-up Power (NB mode)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	14.0	14.0	14.0	14.0	17.0
	153	5765	14.0	14.0	14.0	14.0	17.0
	157	5785	14.0	14.0	14.0	14.0	17.0
	161	5805	14.0	14.0	14.0	14.0	17.0
	165	5825	14.0	14.0	14.0	14.0	17.0
802.11n HT20	149	5745	14.0	14.0	14.0	14.0	17.0
	153	5765	14.0	14.0	14.0	14.0	17.0
	157	5785	14.0	14.0	14.0	14.0	17.0
	161	5805	14.0	14.0	14.0	14.0	17.0
	165	5825	14.0	14.0	14.0	14.0	17.0
802.11n HT40	151	5755	14.0	14.0	14.0	14.0	17.0
	159	5795	14.0	14.0	14.0	14.0	17.0
802.11ac VHT20	149	5745	14.0	14.0	14.0	14.0	17.0
	153	5765	14.0	14.0	14.0	14.0	17.0
	157	5785	14.0	14.0	14.0	14.0	17.0
	161	5805	14.0	14.0	14.0	14.0	17.0
	165	5825	14.0	14.0	14.0	14.0	17.0
802.11ac VHT40	151	5755	14.0	14.0	14.0	14.0	17.0
	159	5795	14.0	14.0	14.0	14.0	17.0
802.11ac VHT80	155	5775	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	149	5745	14.0	14.0	14.0	14.0	17.0
	153	5765	14.0	14.0	14.0	14.0	17.0
	157	5785	14.0	14.0	14.0	14.0	17.0
	161	5805	14.0	14.0	14.0	14.0	17.0
	165	5825	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	151	5755	14.0	14.0	14.0	14.0	17.0
	159	5795	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	155	5775	14.0	14.0	14.0	14.0	17.0
802.11be EHT20	149	5745	14.0	14.0	14.0	14.0	17.0
	153	5765	14.0	14.0	14.0	14.0	17.0
	157	5785	14.0	14.0	14.0	14.0	17.0
	161	5805	14.0	14.0	14.0	14.0	17.0
	165	5825	14.0	14.0	14.0	14.0	17.0
802.11be EHT40	151	5755	14.0	14.0	14.0	14.0	17.0
	159	5795	14.0	14.0	14.0	14.0	17.0
802.11be EHT80	155	5775	14.0	14.0	14.0	14.0	17.0

Tune-up Power (NB mode)							
WLAN 5.9GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	14.0	14.0	14.0	14.0	17.0
	173	5865	14.0	14.0	14.0	14.0	17.0
	177	5885	14.0	14.0	14.0	14.0	17.0
802.11n HT20	169	5845	14.0	14.0	14.0	14.0	17.0
	173	5865	14.0	14.0	14.0	14.0	17.0
	177	5885	14.0	14.0	14.0	14.0	17.0
802.11n HT40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ac VHT20	169	5845	14.0	14.0	14.0	14.0	17.0
	173	5865	14.0	14.0	14.0	14.0	17.0
	177	5885	14.0	14.0	14.0	14.0	17.0
802.11ac VHT40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ac VHT80	171	5855	14.0	14.0	14.0	14.0	17.0
802.11ac VHT160	163	5815	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	169	5845	14.0	14.0	14.0	14.0	17.0
	173	5865	14.0	14.0	14.0	14.0	17.0
	177	5885	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	171	5855	14.0	14.0	14.0	14.0	17.0
802.11ax HE160	163	5815	14.0	14.0	14.0	14.0	17.0
802.11be EHT20	169	5845	14.0	14.0	14.0	14.0	17.0
	173	5865	14.0	14.0	14.0	14.0	17.0
	177	5885	14.0	14.0	14.0	14.0	17.0
802.11be EHT40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11be EHT80	171	5855	14.0	14.0	14.0	14.0	17.0
802.11be EHT160	163	5815	14.0	14.0	14.0	14.0	17.0

Tune-up Power (NB mode)							
UNII-5_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	14.0	14.0	14.0	14.0	17.0
	5	5975	14.0	14.0	14.0	14.0	17.0
	9	5995	14.0	14.0	14.0	14.0	17.0
	13	6015	14.0	14.0	14.0	14.0	17.0
	17	6035	14.0	14.0	14.0	14.0	17.0
	21	6055	14.0	14.0	14.0	14.0	17.0
	25	6075	14.0	14.0	14.0	14.0	17.0
	29	6095	14.0	14.0	14.0	14.0	17.0
	33	6115	14.0	14.0	14.0	14.0	17.0
	37	6135	14.0	14.0	14.0	14.0	17.0
	41	6155	14.0	14.0	14.0	14.0	17.0
	45	6175	14.0	14.0	14.0	14.0	17.0
	49	6195	14.0	14.0	14.0	14.0	17.0
	53	6215	14.0	14.0	14.0	14.0	17.0
	57	6235	14.0	14.0	14.0	14.0	17.0
	61	6255	14.0	14.0	14.0	14.0	17.0
	65	6275	14.0	14.0	14.0	14.0	17.0
	69	6295	14.0	14.0	14.0	14.0	17.0
	73	6315	14.0	14.0	14.0	14.0	17.0
	77	6335	14.0	14.0	14.0	14.0	17.0
	81	6355	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	85	6375	14.0	14.0	14.0	14.0	17.0
	89	6395	14.0	14.0	14.0	14.0	17.0
	93	6415	13.5	13.5	13.5	13.5	16.5
	1	5955	14.0	14.0	14.0	14.0	17.0
	5	5975	14.0	14.0	14.0	14.0	17.0
	9	5995	14.0	14.0	14.0	14.0	17.0
	13	6015	14.0	14.0	14.0	14.0	17.0
	17	6035	14.0	14.0	14.0	14.0	17.0
	21	6055	14.0	14.0	14.0	14.0	17.0
	25	6075	14.0	14.0	14.0	14.0	17.0
	29	6095	14.0	14.0	14.0	14.0	17.0
	33	6115	14.0	14.0	14.0	14.0	17.0
	37	6135	14.0	14.0	14.0	14.0	17.0
	41	6155	14.0	14.0	14.0	14.0	17.0
	45	6175	14.0	14.0	14.0	14.0	17.0
	49	6195	14.0	14.0	14.0	14.0	17.0
	53	6215	14.0	14.0	14.0	14.0	17.0
	57	6235	14.0	14.0	14.0	14.0	17.0
	61	6255	14.0	14.0	14.0	14.0	17.0
	65	6275	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	69	6295	14.0	14.0	14.0	14.0	17.0
	73	6315	14.0	14.0	14.0	14.0	17.0
	77	6335	14.0	14.0	14.0	14.0	17.0
	81	6355	14.0	14.0	14.0	14.0	17.0
	85	6375	14.0	14.0	14.0	14.0	17.0
	89	6395	14.0	14.0	14.0	14.0	17.0
	93	6415	13.5	13.5	13.5	13.5	16.5
	3	5965	14.0	14.0	14.0	14.0	17.0
	11	6005	14.0	14.0	14.0	14.0	17.0
	19	6045	14.0	14.0	14.0	14.0	17.0
	27	6085	14.0	14.0	14.0	14.0	17.0
	35	6125	14.0	14.0	14.0	14.0	17.0
	43	6165	14.0	14.0	14.0	14.0	17.0
	51	6205	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	59	6245	14.0	14.0	14.0	14.0	17.0
	67	6285	14.0	14.0	14.0	14.0	17.0
	75	6325	14.0	14.0	14.0	14.0	17.0
	83	6365	14.0	14.0	14.0	14.0	17.0
	91	6405	14.0	14.0	14.0	14.0	17.0
	7	5985	14.0	14.0	14.0	14.0	17.0
	23	6065	14.0	14.0	14.0	14.0	17.0
802.11ax HE160	39	6145	14.0	14.0	14.0	14.0	17.0
	55	6225	14.0	14.0	14.0	14.0	17.0
	71	6305	14.0	14.0	14.0	14.0	17.0
	87	6385	14.0	14.0	14.0	14.0	17.0
802.11ax HE160	15	6025	14.0	14.0	14.0	14.0	17.0
	47	6185	14.0	14.0	14.0	14.0	17.0
	79	6345	14.0	14.0	14.0	14.0	17.0

Tune-up Power (NB mode)							
UNII-5_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	1	5955	14.0	14.0	14.0	14.0	17.0
	5	5975	14.0	14.0	14.0	14.0	17.0
	9	5995	14.0	14.0	14.0	14.0	17.0
	13	6015	14.0	14.0	14.0	14.0	17.0
	17	6035	14.0	14.0	14.0	14.0	17.0
	21	6055	14.0	14.0	14.0	14.0	17.0
	25	6075	14.0	14.0	14.0	14.0	17.0
	29	6095	14.0	14.0	14.0	14.0	17.0
	33	6115	14.0	14.0	14.0	14.0	17.0
	37	6135	14.0	14.0	14.0	14.0	17.0
	41	6155	14.0	14.0	14.0	14.0	17.0
	45	6175	14.0	14.0	14.0	14.0	17.0
	49	6195	14.0	14.0	14.0	14.0	17.0
	53	6215	14.0	14.0	14.0	14.0	17.0
	57	6235	14.0	14.0	14.0	14.0	17.0
	61	6255	14.0	14.0	14.0	14.0	17.0
	65	6275	14.0	14.0	14.0	14.0	17.0
	69	6295	14.0	14.0	14.0	14.0	17.0
	73	6315	14.0	14.0	14.0	14.0	17.0
	77	6335	14.0	14.0	14.0	14.0	17.0
	81	6355	14.0	14.0	14.0	14.0	17.0
802.11be EHT40	85	6375	14.0	14.0	14.0	14.0	17.0
	89	6395	14.0	14.0	14.0	14.0	17.0
	93	6415	13.5	13.5	13.5	13.5	16.5
	3	5965	14.0	14.0	14.0	14.0	17.0
	11	6005	14.0	14.0	14.0	14.0	17.0
	19	6045	14.0	14.0	14.0	14.0	17.0
	27	6085	14.0	14.0	14.0	14.0	17.0
	35	6125	14.0	14.0	14.0	14.0	17.0
	43	6165	14.0	14.0	14.0	14.0	17.0
	51	6205	14.0	14.0	14.0	14.0	17.0
802.11be EHT80	59	6245	14.0	14.0	14.0	14.0	17.0
	67	6285	14.0	14.0	14.0	14.0	17.0
	75	6325	14.0	14.0	14.0	14.0	17.0
	83	6365	14.0	14.0	14.0	14.0	17.0
	91	6405	14.0	14.0	14.0	14.0	17.0
	7	5985	14.0	14.0	14.0	14.0	17.0
802.11be EHT160	23	6065	14.0	14.0	14.0	14.0	17.0
	39	6145	14.0	14.0	14.0	14.0	17.0
	55	6225	14.0	14.0	14.0	14.0	17.0
	71	6305	14.0	14.0	14.0	14.0	17.0
	87	6385	14.0	14.0	14.0	14.0	17.0
802.11be EHT160	15	6025	14.0	14.0	14.0	14.0	17.0
	47	6185	14.0	14.0	14.0	14.0	17.0
	79	6345	14.0	14.0	14.0	14.0	17.0

Tune-up Power (NB mode)							
UNII-6_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	13.5	13.5	13.5	13.5	16.5
	101	6455	13.5	13.5	13.5	13.5	16.5
	105	6475	13.5	13.5	13.5	13.5	16.5
	109	6495	13.5	13.5	13.5	13.5	16.5
	113	6515	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	97	6435	13.5	13.5	13.5	13.5	16.5
	101	6455	13.5	13.5	13.5	13.5	16.5
	105	6475	13.5	13.5	13.5	13.5	16.5
	109	6495	13.5	13.5	13.5	13.5	16.5
	113	6515	13.5	13.5	13.5	13.5	16.5
802.11ax HE40	99	6445	13.5	13.5	13.5	13.5	16.5
	107	6485	13.5	13.5	13.5	13.5	16.5
	115	6525	13.5	13.5	13.5	13.5	16.5
802.11ax HE80	103	6465	13.5	13.5	13.5	13.5	16.5
	119	6545	13.5	13.5	13.5	13.5	16.5
802.11ax HE160	111	6505	13.5	13.5	13.5	13.5	16.5
802.11be EHT20	97	6435	13.5	13.5	13.5	13.5	16.5
	101	6455	13.5	13.5	13.5	13.5	16.5
	105	6475	13.5	13.5	13.5	13.5	16.5
	109	6495	13.5	13.5	13.5	13.5	16.5
	113	6515	13.5	13.5	13.5	13.5	16.5
802.11be EHT40	99	6445	13.5	13.5	13.5	13.5	16.5
	107	6485	13.5	13.5	13.5	13.5	16.5
	115	6525	13.5	13.5	13.5	13.5	16.5
802.11be EHT80	103	6465	13.5	13.5	13.5	13.5	16.5
	119	6545	13.5	13.5	13.5	13.5	16.5
802.11be EHT160	111	6505	13.5	13.5	13.5	13.5	16.5

Tune-up Power (NB mode)							
UNII-7_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	13.5	13.5	13.5	13.5	16.5
	121	6555	13.5	13.5	13.5	13.5	16.5
	125	6575	13.5	13.5	13.5	13.5	16.5
	129	6595	13.5	13.5	13.5	13.5	16.5
	133	6615	13.5	13.5	13.5	13.5	16.5
	137	6635	13.5	13.5	13.5	13.5	16.5
	141	6655	13.5	13.5	13.5	13.5	16.5
	145	6675	13.5	13.5	13.5	13.5	16.5
	149	6695	13.5	13.5	13.5	13.5	16.5
	153	6715	13.5	13.5	13.5	13.5	16.5
	157	6735	13.5	13.5	13.5	13.5	16.5
	161	6755	13.5	13.5	13.5	13.5	16.5
	165	6775	13.5	13.5	13.5	13.5	16.5
	169	6795	13.5	13.5	13.5	13.5	16.5
	173	6815	13.5	13.5	13.5	13.5	16.5
	177	6835	13.5	13.5	13.5	13.5	16.5
	181	6855	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	117	6535	13.5	13.5	13.5	13.5	16.5
	121	6555	13.5	13.5	13.5	13.5	16.5
	125	6575	13.5	13.5	13.5	13.5	16.5
	129	6595	13.5	13.5	13.5	13.5	16.5
	133	6615	13.5	13.5	13.5	13.5	16.5
	137	6635	13.5	13.5	13.5	13.5	16.5
	141	6655	13.5	13.5	13.5	13.5	16.5
	145	6675	13.5	13.5	13.5	13.5	16.5
	149	6695	13.5	13.5	13.5	13.5	16.5
	153	6715	13.5	13.5	13.5	13.5	16.5
	157	6735	13.5	13.5	13.5	13.5	16.5
	161	6755	13.5	13.5	13.5	13.5	16.5
	165	6775	13.5	13.5	13.5	13.5	16.5
	169	6795	13.5	13.5	13.5	13.5	16.5
	173	6815	13.5	13.5	13.5	13.5	16.5
	177	6835	13.5	13.5	13.5	13.5	16.5
	181	6855	13.5	13.5	13.5	13.5	16.5
802.11ax HE40	123	6565	13.5	13.5	13.5	13.5	16.5
	131	6605	13.5	13.5	13.5	13.5	16.5
	139	6645	13.5	13.5	13.5	13.5	16.5
	147	6685	13.5	13.5	13.5	13.5	16.5
	155	6725	13.5	13.5	13.5	13.5	16.5
	163	6765	13.5	13.5	13.5	13.5	16.5
	171	6805	13.5	13.5	13.5	13.5	16.5
	179	6845	13.5	13.5	13.5	13.5	16.5
802.11ax HE80	187	6885	13.5	13.5	13.5	13.5	16.5
	135	6625	13.5	13.5	13.5	13.5	16.5
	151	6705	13.5	13.5	13.5	13.5	16.5
	167	6785	13.5	13.5	13.5	13.5	16.5
802.11ax HE160	183	6865	13.5	13.5	13.5	13.5	16.5
	143	6665	13.5	13.5	13.5	13.5	16.5
	175	6825	13.5	13.5	13.5	13.5	16.5

Tune-up Power (NB mode)							
UNII-7_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	117	6535	13.5	13.5	13.5	13.5	16.5
	121	6555	13.5	13.5	13.5	13.5	16.5
	125	6575	13.5	13.5	13.5	13.5	16.5
	129	6595	13.5	13.5	13.5	13.5	16.5
	133	6615	13.5	13.5	13.5	13.5	16.5
	137	6635	13.5	13.5	13.5	13.5	16.5
	141	6655	13.5	13.5	13.5	13.5	16.5
	145	6675	13.5	13.5	13.5	13.5	16.5
	149	6695	13.5	13.5	13.5	13.5	16.5
	153	6715	13.5	13.5	13.5	13.5	16.5
	157	6735	13.5	13.5	13.5	13.5	16.5
	161	6755	13.5	13.5	13.5	13.5	16.5
	165	6775	13.5	13.5	13.5	13.5	16.5
	169	6795	13.5	13.5	13.5	13.5	16.5
	173	6815	13.5	13.5	13.5	13.5	16.5
	177	6835	13.5	13.5	13.5	13.5	16.5
	181	6855	13.5	13.5	13.5	13.5	16.5
802.11be EHT40	123	6565	13.5	13.5	13.5	13.5	16.5
	131	6605	13.5	13.5	13.5	13.5	16.5
	139	6645	13.5	13.5	13.5	13.5	16.5
	147	6685	13.5	13.5	13.5	13.5	16.5
	155	6725	13.5	13.5	13.5	13.5	16.5
	163	6765	13.5	13.5	13.5	13.5	16.5
	171	6805	13.5	13.5	13.5	13.5	16.5
802.11be EHT80	179	6845	13.5	13.5	13.5	13.5	16.5
	187	6885	14.0	14.0	14.0	14.0	17.0
	135	6625	13.5	13.5	13.5	13.5	16.5
	151	6705	13.5	13.5	13.5	13.5	16.5
802.11be EHT160	167	6785	13.5	13.5	13.5	13.5	16.5
	183	6865	14.0	14.0	14.0	14.0	17.0
	143	6665	13.5	13.5	13.5	13.5	16.5
	175	6825	13.5	13.5	13.5	13.5	16.5

Tune-up Power (NB mode)							
UNII-5 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	7.5	7.5	1.5	1.5	4.5
	5	5975	7.5	7.5	1.5	1.5	4.5
	9	5995	7.5	7.5	1.5	1.5	4.5
	13	6015	7.5	7.5	1.5	1.5	4.5
	17	6035	7.5	7.5	1.5	1.5	4.5
	21	6055	7.5	7.5	1.5	1.5	4.5
	25	6075	7.5	7.5	1.5	1.5	4.5
	29	6095	7.5	7.5	1.5	1.5	4.5
	33	6115	7.5	7.5	1.5	1.5	4.5
	37	6135	7.5	7.5	1.5	1.5	4.5
	41	6155	7.5	7.5	1.5	1.5	4.5
	45	6175	7.5	7.5	1.5	1.5	4.5
	49	6195	7.5	7.5	1.5	1.5	4.5
	53	6215	7.5	7.5	1.5	1.5	4.5
	57	6235	7.5	7.5	1.5	1.5	4.5
	61	6255	7.5	7.5	1.5	1.5	4.5
	65	6275	7.5	7.5	1.5	1.5	4.5
	69	6295	7.5	7.5	1.5	1.5	4.5
	73	6315	7.5	7.5	1.5	1.5	4.5
	77	6335	7.5	7.5	1.5	1.5	4.5
	81	6355	7.5	7.5	1.5	1.5	4.5
802.11ax HE20	85	6375	7.5	7.5	1.5	1.5	4.5
	89	6395	7.5	7.5	1.5	1.5	4.5
	93	6415	7.5	7.5	1.5	1.5	4.5
	1	5955	7.5	7.5	4.5	4.5	7.5
	5	5975	7.5	7.5	4.5	4.5	7.5
	9	5995	7.5	7.5	4.5	4.5	7.5
	13	6015	7.5	7.5	4.5	4.5	7.5
	17	6035	7.5	7.5	4.5	4.5	7.5
	21	6055	7.5	7.5	4.5	4.5	7.5
	25	6075	7.5	7.5	4.5	4.5	7.5
	29	6095	7.5	7.5	4.5	4.5	7.5
	33	6115	7.5	7.5	4.5	4.5	7.5
	37	6135	7.5	7.5	4.5	4.5	7.5
	41	6155	7.5	7.5	4.5	4.5	7.5
	45	6175	7.5	7.5	4.5	4.5	7.5
	49	6195	7.5	7.5	4.5	4.5	7.5
	53	6215	7.5	7.5	4.5	4.5	7.5
	57	6235	7.5	7.5	4.5	4.5	7.5
	61	6255	7.5	7.5	4.5	4.5	7.5
	65	6275	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	69	6295	7.5	7.5	4.5	4.5	7.5
	73	6315	7.5	7.5	4.5	4.5	7.5
	77	6335	7.5	7.5	4.5	4.5	7.5
	81	6355	7.5	7.5	4.5	4.5	7.5
	85	6375	7.5	7.5	4.5	4.5	7.5
	89	6395	7.5	7.5	4.5	4.5	7.5
	93	6415	7.5	7.5	4.5	4.5	7.5
	3	5965	10.0	10.0	7.5	7.5	10.5
	11	6005	10.0	10.0	7.5	7.5	10.5
	19	6045	10.0	10.0	7.5	7.5	10.5
	27	6085	10.0	10.0	7.5	7.5	10.5
	35	6125	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	43	6165	10.0	10.0	7.5	7.5	10.5
	51	6205	10.0	10.0	7.5	7.5	10.5
	59	6245	10.0	10.0	7.5	7.5	10.5
	67	6285	10.0	10.0	7.5	7.5	10.5
	75	6325	10.0	10.0	7.5	7.5	10.5
	83	6365	10.0	10.0	7.5	7.5	10.5
	91	6405	10.0	10.0	7.5	7.5	10.5
	7	5985	13.0	13.0	10.5	10.5	13.5
802.11ax HE160	23	6065	13.0	13.0	10.5	10.5	13.5
	39	6145	13.0	13.0	10.5	10.5	13.5
	55	6225	13.0	13.0	10.5	10.5	13.5
	71	6305	13.0	13.0	10.5	10.5	13.5
802.11ax HE160	87	6385	13.0	13.0	10.5	10.5	13.5
	15	6025	14.0	14.0	13.0	13.0	16.0
	47	6185	14.0	14.0	13.0	13.0	16.0
802.11ax HE160	79	6345	14.0	14.0	13.0	13.0	16.0

Tune-up Power (NB mode)							
UNII-5 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	1	5955	7.5	7.5	4.5	4.5	7.5
	5	5975	7.5	7.5	4.5	4.5	7.5
	9	5995	7.5	7.5	4.5	4.5	7.5
	13	6015	7.5	7.5	4.5	4.5	7.5
	17	6035	7.5	7.5	4.5	4.5	7.5
	21	6055	7.5	7.5	4.5	4.5	7.5
	25	6075	7.5	7.5	4.5	4.5	7.5
	29	6095	7.5	7.5	4.5	4.5	7.5
	33	6115	7.5	7.5	4.5	4.5	7.5
	37	6135	7.5	7.5	4.5	4.5	7.5
	41	6155	7.5	7.5	4.5	4.5	7.5
	45	6175	7.5	7.5	4.5	4.5	7.5
	49	6195	7.5	7.5	4.5	4.5	7.5
	53	6215	7.5	7.5	4.5	4.5	7.5
	57	6235	7.5	7.5	4.5	4.5	7.5
	61	6255	7.5	7.5	4.5	4.5	7.5
	65	6275	7.5	7.5	4.5	4.5	7.5
	69	6295	7.5	7.5	4.5	4.5	7.5
	73	6315	7.5	7.5	4.5	4.5	7.5
	77	6335	7.5	7.5	4.5	4.5	7.5
	81	6355	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	85	6375	7.5	7.5	4.5	4.5	7.5
	89	6395	7.5	7.5	4.5	4.5	7.5
	93	6415	7.5	7.5	4.5	4.5	7.5
	3	5965	10.0	10.0	7.5	7.5	10.5
	11	6005	10.0	10.0	7.5	7.5	10.5
	19	6045	10.0	10.0	7.5	7.5	10.5
	27	6085	10.0	10.0	7.5	7.5	10.5
	35	6125	10.0	10.0	7.5	7.5	10.5
	43	6165	10.0	10.0	7.5	7.5	10.5
	51	6205	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	59	6245	10.0	10.0	7.5	7.5	10.5
	67	6285	10.0	10.0	7.5	7.5	10.5
	75	6325	10.0	10.0	7.5	7.5	10.5
	83	6365	10.0	10.0	7.5	7.5	10.5
	91	6405	10.0	10.0	7.5	7.5	10.5
	7	5985	13.0	13.0	10.5	10.5	13.5
802.11be EHT160	23	6065	13.0	13.0	10.5	10.5	13.5
	39	6145	13.0	13.0	10.5	10.5	13.5
	55	6225	13.0	13.0	10.5	10.5	13.5
	71	6305	13.0	13.0	10.5	10.5	13.5
	87	6385	13.0	13.0	10.5	10.5	13.5
	15	6025	14.0	14.0	13.0	13.0	16.0
	47	6185	14.0	14.0	13.0	13.0	16.0
	79	6345	14.0	14.0	13.0	13.0	16.0

Tune-up Power (NB mode)							
UNII-6 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	7.5	7.5	2.0	2.0	5.0
	101	6455	7.5	7.5	2.0	2.0	5.0
	105	6475	7.5	7.5	2.0	2.0	5.0
	109	6495	7.5	7.5	2.0	2.0	5.0
	113	6515	7.5	7.5	2.0	2.0	5.0
802.11ax HE20	97	6435	7.5	7.5	4.5	4.5	7.5
	101	6455	7.5	7.5	4.5	4.5	7.5
	105	6475	7.5	7.5	4.5	4.5	7.5
	109	6495	7.5	7.5	4.5	4.5	7.5
	113	6515	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	99	6445	10.0	10.0	7.5	7.5	10.5
	107	6485	10.0	10.0	7.5	7.5	10.5
	115	6525	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	103	6465	13.0	13.0	10.5	10.5	13.5
	119	6545	13.0	13.0	10.5	10.5	13.5
802.11ax HE160	111	6505	13.5	13.5	13.0	13.0	16.0
802.11be EHT20	97	6435	7.5	7.5	4.5	4.5	7.5
	101	6455	7.5	7.5	4.5	4.5	7.5
	105	6475	7.5	7.5	4.5	4.5	7.5
	109	6495	7.5	7.5	4.5	4.5	7.5
	113	6515	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	99	6445	10.0	10.0	7.5	7.5	10.5
	107	6485	10.0	10.0	7.5	7.5	10.5
	115	6525	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	103	6465	13.0	13.0	10.5	10.5	13.5
	119	6545	13.0	13.0	10.5	10.5	13.5
802.11be EHT160	111	6505	13.5	13.5	13.0	13.0	16.0

Tune-up Power (NB mode)							
UNII-7 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	7.5	7.5	2.0	2.0	5.0
	121	6555	7.5	7.5	2.0	2.0	5.0
	125	6575	7.5	7.5	2.0	2.0	5.0
	129	6595	7.5	7.5	2.0	2.0	5.0
	133	6615	7.5	7.5	2.0	2.0	5.0
	137	6635	7.5	7.5	2.0	2.0	5.0
	141	6655	7.5	7.5	2.0	2.0	5.0
	145	6675	7.5	7.5	2.0	2.0	5.0
	149	6695	7.5	7.5	2.0	2.0	5.0
	153	6715	7.5	7.5	2.0	2.0	5.0
	157	6735	7.5	7.5	2.0	2.0	5.0
	161	6755	7.5	7.5	2.0	2.0	5.0
	165	6775	7.5	7.5	2.0	2.0	5.0
	169	6795	7.5	7.5	2.0	2.0	5.0
	173	6815	7.5	7.5	2.0	2.0	5.0
	177	6835	7.5	7.5	2.0	2.0	5.0
	181	6855	7.5	7.5	2.0	2.0	5.0
802.11ax HE20	117	6535	7.5	7.5	4.5	4.5	7.5
	121	6555	7.5	7.5	4.5	4.5	7.5
	125	6575	7.5	7.5	4.5	4.5	7.5
	129	6595	7.5	7.5	4.5	4.5	7.5
	133	6615	7.5	7.5	4.5	4.5	7.5
	137	6635	7.5	7.5	4.5	4.5	7.5
	141	6655	7.5	7.5	4.5	4.5	7.5
	145	6675	7.5	7.5	4.5	4.5	7.5
	149	6695	7.5	7.5	4.5	4.5	7.5
	153	6715	7.5	7.5	4.5	4.5	7.5
	157	6735	7.5	7.5	4.5	4.5	7.5
	161	6755	7.5	7.5	4.5	4.5	7.5
	165	6775	7.5	7.5	4.5	4.5	7.5
	169	6795	7.5	7.5	4.5	4.5	7.5
	173	6815	7.5	7.5	4.5	4.5	7.5
	177	6835	7.5	7.5	4.5	4.5	7.5
	181	6855	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	123	6565	10.0	10.0	7.5	7.5	10.5
	131	6605	10.0	10.0	7.5	7.5	10.5
	139	6645	10.0	10.0	7.5	7.5	10.5
	147	6685	10.0	10.0	7.5	7.5	10.5
	155	6725	10.0	10.0	7.5	7.5	10.5
	163	6765	10.0	10.0	7.5	7.5	10.5
	171	6805	10.0	10.0	7.5	7.5	10.5
	179	6845	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	187	6885	10.0	10.0	7.5	7.5	10.5
	135	6625	13.0	13.0	10.5	10.5	10.5
	151	6705	13.0	13.0	10.5	10.5	10.5
	167	6785	13.0	13.0	10.5	10.5	10.5
802.11ax HE160	183	6865	13.0	13.0	10.5	10.5	10.5
	143	6665	13.5	13.5	13.0	13.0	16.0
	175	6825	13.5	13.5	13.0	13.0	16.0

Tune-up Power (NB mode)							
UNII-7_LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	117	6535	7.5	7.5	4.5	4.5	7.5
	121	6555	7.5	7.5	4.5	4.5	7.5
	125	6575	7.5	7.5	4.5	4.5	7.5
	129	6595	7.5	7.5	4.5	4.5	7.5
	133	6615	7.5	7.5	4.5	4.5	7.5
	137	6635	7.5	7.5	4.5	4.5	7.5
	141	6655	7.5	7.5	4.5	4.5	7.5
	145	6675	7.5	7.5	4.5	4.5	7.5
	149	6695	7.5	7.5	4.5	4.5	7.5
	153	6715	7.5	7.5	4.5	4.5	7.5
	157	6735	7.5	7.5	4.5	4.5	7.5
	161	6755	7.5	7.5	4.5	4.5	7.5
	165	6775	7.5	7.5	4.5	4.5	7.5
	169	6795	7.5	7.5	4.5	4.5	7.5
	173	6815	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	177	6835	7.5	7.5	4.5	4.5	7.5
	181	6855	7.5	7.5	4.5	4.5	7.5
	123	6565	10.0	10.0	7.5	7.5	10.5
	131	6605	10.0	10.0	7.5	7.5	10.5
	139	6645	10.0	10.0	7.5	7.5	10.5
	147	6685	10.0	10.0	7.5	7.5	10.5
	155	6725	10.0	10.0	7.5	7.5	10.5
	163	6765	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	171	6805	10.0	10.0	7.5	7.5	10.5
	179	6845	10.0	10.0	7.5	7.5	10.5
	187	6885	10.0	10.0	7.5	7.5	10.5
	135	6625	13.0	13.0	10.5	10.5	10.5
802.11be EHT160	151	6705	13.0	13.0	10.5	10.5	10.5
	167	6785	13.0	13.0	10.5	10.5	10.5
	183	6865	13.0	13.0	10.5	10.5	10.5
802.11be EHT160	143	6665	13.5	13.5	13.0	13.0	16.0
	175	6825	13.5	13.5	13.0	13.0	16.0

Tune-up Power (NB mode)							
UNII-8 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	185	6875	7.5	7.5	2.0	2.0	5.0
	189	6895	7.5	7.5	2.0	2.0	5.0
	193	6915	7.5	7.5	2.0	2.0	5.0
	197	6935	7.5	7.5	2.0	2.0	5.0
	201	6955	7.5	7.5	2.0	2.0	5.0
	205	6975	7.5	7.5	2.0	2.0	5.0
	209	6995	7.5	7.5	2.0	2.0	5.0
	213	7015	7.5	7.5	2.0	2.0	5.0
	217	7035	7.5	7.5	2.0	2.0	5.0
	221	7055	7.5	7.5	2.0	2.0	5.0
	225	7075	7.5	7.5	2.0	2.0	5.0
	229	7095	7.5	7.5	2.0	2.0	5.0
	233	7115	7.5	7.5	2.0	2.0	5.0
802.11ax HE20	185	6875	7.5	7.5	4.5	4.5	7.5
	189	6895	7.5	7.5	4.5	4.5	7.5
	193	6915	7.5	7.5	4.5	4.5	7.5
	197	6935	7.5	7.5	4.5	4.5	7.5
	201	6955	7.5	7.5	4.5	4.5	7.5
	205	6975	7.5	7.5	4.5	4.5	7.5
	209	6995	7.5	7.5	4.5	4.5	7.5
	213	7015	7.5	7.5	4.5	4.5	7.5
	217	7035	7.5	7.5	4.5	4.5	7.5
	221	7055	7.5	7.5	4.5	4.5	7.5
	225	7075	7.5	7.5	4.5	4.5	7.5
	229	7095	7.5	7.5	4.5	4.5	7.5
	233	7115	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	195	6925	10.5	10.5	7.5	7.5	10.5
	203	6965	10.5	10.5	7.5	7.5	10.5
	211	7005	10.5	10.5	7.5	7.5	10.5
	219	7045	10.5	10.5	7.5	7.5	10.5
	227	7085	10.5	10.5	7.5	7.5	10.5
802.11ax HE80	199	6945	13.0	13.0	10.5	10.5	13.5
	215	7025	13.0	13.0	10.5	10.5	13.5
802.11ax HE160	207	6985	14.0	14.0	13.0	13.0	16.0
802.11be EHT20	185	6875	7.5	7.5	4.5	4.5	7.5
	189	6895	7.5	7.5	4.5	4.5	7.5
	193	6915	7.5	7.5	4.5	4.5	7.5
	197	6935	7.5	7.5	4.5	4.5	7.5
	201	6955	7.5	7.5	4.5	4.5	7.5
	205	6975	7.5	7.5	4.5	4.5	7.5
	209	6995	7.5	7.5	4.5	4.5	7.5
	213	7015	7.5	7.5	4.5	4.5	7.5
	217	7035	7.5	7.5	4.5	4.5	7.5
	221	7055	7.5	7.5	4.5	4.5	7.5
	225	7075	7.5	7.5	4.5	4.5	7.5
	229	7095	7.5	7.5	4.5	4.5	7.5
	233	7115	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	195	6925	10.5	10.5	7.5	7.5	10.5
	203	6965	10.5	10.5	7.5	7.5	10.5
	211	7005	10.5	10.5	7.5	7.5	10.5
	219	7045	10.5	10.5	7.5	7.5	10.5
	227	7085	10.5	10.5	7.5	7.5	10.5
802.11be EHT80	199	6945	13.0	13.0	10.5	10.5	13.5
	215	7025	13.0	13.0	10.5	10.5	13.5
802.11be EHT160	207	6985	14.0	14.0	13.0	13.0	16.0

Tune-up Power (Tablet mode)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11g	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11ax HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11ax HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11be EHT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11be EHT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5

Tune-up Power (Tablet mode)					
Bluetooth					
Mode	Channel	Frequency		Ant 1 Max Tune-up	
BR / EDR	0	2402		11.5	
	39	2441		11.5	
	78	2480		11.5	
LE	0	2402		11.5	
	19	2440		11.5	
	39	2480		11.5	

Tune-up Power (Tablet mode)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	11.0	11.0	11.0	11.0	14.0
	40	5200	11.0	11.0	11.0	11.0	14.0
	44	5220	11.0	11.0	11.0	11.0	14.0
	48	5240	11.0	11.0	11.0	11.0	14.0
802.11n HT20	36	5180	11.0	11.0	11.0	11.0	14.0
	40	5200	11.0	11.0	11.0	11.0	14.0
	44	5220	11.0	11.0	11.0	11.0	14.0
	48	5240	11.0	11.0	11.0	11.0	14.0
802.11n HT40	38	5190	11.0	11.0	11.0	11.0	14.0
	46	5230	11.0	11.0	11.0	11.0	14.0
802.11ac VHT20	36	5180	11.0	11.0	11.0	11.0	14.0
	40	5200	11.0	11.0	11.0	11.0	14.0
	44	5220	11.0	11.0	11.0	11.0	14.0
	48	5240	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	38	5190	11.0	11.0	11.0	11.0	14.0
	46	5230	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	42	5210	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	36	5180	11.0	11.0	11.0	11.0	14.0
	40	5200	11.0	11.0	11.0	11.0	14.0
	44	5220	11.0	11.0	11.0	11.0	14.0
	48	5240	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	38	5190	11.0	11.0	11.0	11.0	14.0
	46	5230	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	42	5210	11.0	11.0	11.0	11.0	14.0
802.11be EHT20	36	5180	11.0	11.0	11.0	11.0	14.0
	40	5200	11.0	11.0	11.0	11.0	14.0
	44	5220	11.0	11.0	11.0	11.0	14.0
	48	5240	11.0	11.0	11.0	11.0	14.0
802.11be EHT40	38	5190	11.0	11.0	11.0	11.0	14.0
	46	5230	11.0	11.0	11.0	11.0	14.0
802.11be EHT80	42	5210	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Tablet mode)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	11.0	11.0	11.0	11.0	14.0
	56	5280	11.0	11.0	11.0	11.0	14.0
	60	5300	11.0	11.0	11.0	11.0	14.0
	64	5320	11.0	11.0	11.0	11.0	14.0
802.11n HT20	52	5260	11.0	11.0	11.0	11.0	14.0
	56	5280	11.0	11.0	11.0	11.0	14.0
	60	5300	11.0	11.0	11.0	11.0	14.0
	64	5320	11.0	11.0	11.0	11.0	14.0
802.11n HT40	54	5270	11.0	11.0	11.0	11.0	14.0
	62	5310	11.0	11.0	11.0	11.0	14.0
802.11ac VHT20	52	5260	11.0	11.0	11.0	11.0	14.0
	56	5280	11.0	11.0	11.0	11.0	14.0
	60	5300	11.0	11.0	11.0	11.0	14.0
	64	5320	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	54	5270	11.0	11.0	11.0	11.0	14.0
	62	5310	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	58	5290	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	50	5250	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	52	5260	11.0	11.0	11.0	11.0	14.0
	56	5280	11.0	11.0	11.0	11.0	14.0
	60	5300	11.0	11.0	11.0	11.0	14.0
	64	5320	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	54	5270	11.0	11.0	11.0	11.0	14.0
	62	5310	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	58	5290	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	50	5250	11.0	11.0	11.0	11.0	14.0
802.11be EHT20	52	5260	11.0	11.0	11.0	11.0	14.0
	56	5280	11.0	11.0	11.0	11.0	14.0
	60	5300	11.0	11.0	11.0	11.0	14.0
	64	5320	11.0	11.0	11.0	11.0	14.0
802.11be EHT40	54	5270	11.0	11.0	11.0	11.0	14.0
	62	5310	11.0	11.0	11.0	11.0	14.0
802.11be EHT80	58	5290	11.0	11.0	11.0	11.0	14.0
802.11be EHT160	50	5250	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Tablet mode)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11n HT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11n HT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ac VHT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11be EHT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11be EHT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11be EHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11be EHT160	114	5570	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Tablet mode)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11n HT20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11n HT40	151	5755	11.0	11.0	11.0	11.0	14.0
	159	5795	11.0	11.0	11.0	11.0	14.0
802.11ac VHT20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	151	5755	11.0	11.0	11.0	11.0	14.0
	159	5795	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	155	5775	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	151	5755	11.0	11.0	11.0	11.0	14.0
	159	5795	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	155	5775	11.0	11.0	11.0	11.0	14.0
802.11be EHT20	149	5745	11.0	11.0	11.0	11.0	14.0
	153	5765	11.0	11.0	11.0	11.0	14.0
	157	5785	11.0	11.0	11.0	11.0	14.0
	161	5805	11.0	11.0	11.0	11.0	14.0
	165	5825	11.0	11.0	11.0	11.0	14.0
802.11be EHT40	151	5755	11.0	11.0	11.0	11.0	14.0
	159	5795	11.0	11.0	11.0	11.0	14.0
802.11be EHT80	155	5775	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Tablet mode)							
WLAN 5.9GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11n HT20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11n HT40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11ac VHT20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11ac VHT40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	171	5855	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	163	5815	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	171	5855	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	163	5815	11.0	11.0	11.0	11.0	14.0
802.11be EHT20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11be EHT40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11be EHT80	171	5855	11.0	11.0	11.0	11.0	14.0
802.11be EHT160	163	5815	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Tablet mode)							
UNII-5_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	10.5	10.5	10.5	10.5	13.5
	5	5975	10.5	10.5	10.5	10.5	13.5
	9	5995	10.5	10.5	10.5	10.5	13.5
	13	6015	10.5	10.5	10.5	10.5	13.5
	17	6035	10.5	10.5	10.5	10.5	13.5
	21	6055	10.5	10.5	10.5	10.5	13.5
	25	6075	10.5	10.5	10.5	10.5	13.5
	29	6095	10.5	10.5	10.5	10.5	13.5
	33	6115	10.5	10.5	10.5	10.5	13.5
	37	6135	10.5	10.5	10.5	10.5	13.5
	41	6155	10.5	10.5	10.5	10.5	13.5
	45	6175	10.5	10.5	10.5	10.5	13.5
	49	6195	10.5	10.5	10.5	10.5	13.5
	53	6215	10.5	10.5	10.5	10.5	13.5
	57	6235	10.5	10.5	10.5	10.5	13.5
	61	6255	10.5	10.5	10.5	10.5	13.5
	65	6275	10.5	10.5	10.5	10.5	13.5
	69	6295	10.5	10.5	10.5	10.5	13.5
	73	6315	10.5	10.5	10.5	10.5	13.5
	77	6335	10.5	10.5	10.5	10.5	13.5
	81	6355	10.5	10.5	10.5	10.5	13.5
	85	6375	10.5	10.5	10.5	10.5	13.5
	89	6395	10.5	10.5	10.5	10.5	13.5
	93	6415	11.5	10.5	11.5	10.5	14.04
802.11ax HE20	1	5955	10.5	10.5	10.5	10.5	13.5
	5	5975	10.5	10.5	10.5	10.5	13.5
	9	5995	10.5	10.5	10.5	10.5	13.5
	13	6015	10.5	10.5	10.5	10.5	13.5
	17	6035	10.5	10.5	10.5	10.5	13.5
	21	6055	10.5	10.5	10.5	10.5	13.5
	25	6075	10.5	10.5	10.5	10.5	13.5
	29	6095	10.5	10.5	10.5	10.5	13.5
	33	6115	10.5	10.5	10.5	10.5	13.5
	37	6135	10.5	10.5	10.5	10.5	13.5
	41	6155	10.5	10.5	10.5	10.5	13.5
	45	6175	10.5	10.5	10.5	10.5	13.5
	49	6195	10.5	10.5	10.5	10.5	13.5
	53	6215	10.5	10.5	10.5	10.5	13.5
	57	6235	10.5	10.5	10.5	10.5	13.5
	61	6255	10.5	10.5	10.5	10.5	13.5
	65	6275	10.5	10.5	10.5	10.5	13.5
	69	6295	10.5	10.5	10.5	10.5	13.5
	73	6315	10.5	10.5	10.5	10.5	13.5
	77	6335	10.5	10.5	10.5	10.5	13.5
	81	6355	10.5	10.5	10.5	10.5	13.5
	85	6375	10.5	10.5	10.5	10.5	13.5
	89	6395	10.5	10.5	10.5	10.5	13.5
	93	6415	11.5	10.5	11.5	10.5	14.04
802.11ax HE40	3	5965	10.5	10.5	10.5	10.5	13.5
	11	6005	10.5	10.5	10.5	10.5	13.5
	19	6045	10.5	10.5	10.5	10.5	13.5
	27	6085	10.5	10.5	10.5	10.5	13.5
	35	6125	10.5	10.5	10.5	10.5	13.5
	43	6165	10.5	10.5	10.5	10.5	13.5
	51	6205	10.5	10.5	10.5	10.5	13.5
	59	6245	10.5	10.5	10.5	10.5	13.5
	67	6285	10.5	10.5	10.5	10.5	13.5
	75	6325	10.5	10.5	10.5	10.5	13.5
	83	6365	10.5	10.5	10.5	10.5	13.5
	91	6405	11.5	10.5	11.5	10.5	14.04
802.11ax HE80	7	5985	10.5	10.5	10.5	10.5	13.5
	23	6065	10.5	10.5	10.5	10.5	13.5
	39	6145	10.5	10.5	10.5	10.5	13.5
	55	6225	10.5	10.5	10.5	10.5	13.5
	71	6305	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	87	6385	10.5	10.5	10.5	10.5	13.5
	15	6025	10.5	10.5	10.5	10.5	13.5
	47	6185	10.5	10.5	10.5	10.5	13.5
	79	6345	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Tablet mode)							
UNII-5_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	1	5955	10.5	10.5	10.5	10.5	13.5
	5	5975	10.5	10.5	10.5	10.5	13.5
	9	5995	10.5	10.5	10.5	10.5	13.5
	13	6015	10.5	10.5	10.5	10.5	13.5
	17	6035	10.5	10.5	10.5	10.5	13.5
	21	6055	10.5	10.5	10.5	10.5	13.5
	25	6075	10.5	10.5	10.5	10.5	13.5
	29	6095	10.5	10.5	10.5	10.5	13.5
	33	6115	10.5	10.5	10.5	10.5	13.5
	37	6135	10.5	10.5	10.5	10.5	13.5
	41	6155	10.5	10.5	10.5	10.5	13.5
	45	6175	10.5	10.5	10.5	10.5	13.5
	49	6195	10.5	10.5	10.5	10.5	13.5
	53	6215	10.5	10.5	10.5	10.5	13.5
	57	6235	10.5	10.5	10.5	10.5	13.5
	61	6255	10.5	10.5	10.5	10.5	13.5
	65	6275	10.5	10.5	10.5	10.5	13.5
	69	6295	10.5	10.5	10.5	10.5	13.5
	73	6315	10.5	10.5	10.5	10.5	13.5
	77	6335	10.5	10.5	10.5	10.5	13.5
	81	6355	10.5	10.5	10.5	10.5	13.5
802.11be EHT40	85	6375	10.5	10.5	10.5	10.5	13.5
	89	6395	10.5	10.5	10.5	10.5	13.5
	93	6415	11.5	10.5	11.5	10.5	14.04
	3	5965	10.5	10.5	10.5	10.5	13.5
	11	6005	10.5	10.5	10.5	10.5	13.5
	19	6045	10.5	10.5	10.5	10.5	13.5
	27	6085	10.5	10.5	10.5	10.5	13.5
	35	6125	10.5	10.5	10.5	10.5	13.5
	43	6165	10.5	10.5	10.5	10.5	13.5
	51	6205	10.5	10.5	10.5	10.5	13.5
802.11be EHT80	59	6245	10.5	10.5	10.5	10.5	13.5
	67	6285	10.5	10.5	10.5	10.5	13.5
	75	6325	10.5	10.5	10.5	10.5	13.5
	83	6365	10.5	10.5	10.5	10.5	13.5
	91	6405	11.5	10.5	11.5	10.5	14.04
	7	5985	10.5	10.5	10.5	10.5	13.5
	23	6065	10.5	10.5	10.5	10.5	13.5
	39	6145	10.5	10.5	10.5	10.5	13.5
802.11be EHT160	55	6225	10.5	10.5	10.5	10.5	13.5
	71	6305	10.5	10.5	10.5	10.5	13.5
	87	6385	10.5	10.5	10.5	10.5	13.5
802.11be EHT160	15	6025	10.5	10.5	10.5	10.5	13.5
	47	6185	10.5	10.5	10.5	10.5	13.5
	79	6345	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Tablet mode)							
UNII-6_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	11.5	10.5	11.5	10.5	14.04
	101	6455	11.5	10.5	11.5	10.5	14.04
	105	6475	11.5	10.5	11.5	10.5	14.04
	109	6495	11.5	10.5	11.5	10.5	14.04
	113	6515	11.5	10.5	11.5	10.5	14.04
802.11ax HE20	97	6435	11.5	10.5	11.5	10.5	14.04
	101	6455	11.5	10.5	11.5	10.5	14.04
	105	6475	11.5	10.5	11.5	10.5	14.04
	109	6495	11.5	10.5	11.5	10.5	14.04
	113	6515	11.5	10.5	11.5	10.5	14.04
802.11ax HE40	99	6445	11.5	10.5	11.5	10.5	14.04
	107	6485	11.5	10.5	11.5	10.5	14.04
	115	6525	11.5	10.5	11.5	10.5	14.04
802.11ax HE80	103	6465	11.5	10.5	11.5	10.5	14.04
	119	6545	10.0	10.0	10.0	10.0	13.00
802.11ax HE160	111	6505	11.5	10.5	11.5	10.5	14.04
802.11be EHT20	97	6435	11.5	10.5	11.5	10.5	14.04
	101	6455	11.5	10.5	11.5	10.5	14.04
	105	6475	11.5	10.5	11.5	10.5	14.04
	109	6495	11.5	10.5	11.5	10.5	14.04
	113	6515	11.5	10.5	11.5	10.5	14.04
802.11be EHT40	99	6445	11.5	10.5	11.5	10.5	14.04
	107	6485	11.5	10.5	11.5	10.5	14.04
	115	6525	11.5	10.5	11.5	10.5	14.04
802.11be EHT80	103	6465	11.5	10.5	11.5	10.5	14.04
	119	6545	10.0	10.0	10.0	10.0	13.00
802.11be EHT160	111	6505	11.5	10.5	11.5	10.5	14.04

Tune-up Power (Tablet mode)							
UNII-7_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	10.0	10.0	10.0	10.0	13.0
	121	6555	10.0	10.0	10.0	10.0	13.0
	125	6575	10.0	10.0	10.0	10.0	13.0
	129	6595	10.0	10.0	10.0	10.0	13.0
	133	6615	10.0	10.0	10.0	10.0	13.0
	137	6635	10.0	10.0	10.0	10.0	13.0
	141	6655	10.0	10.0	10.0	10.0	13.0
	145	6675	10.0	10.0	10.0	10.0	13.0
	149	6695	10.0	10.0	10.0	10.0	13.0
	153	6715	10.0	10.0	10.0	10.0	13.0
	157	6735	10.0	10.0	10.0	10.0	13.0
	161	6755	10.0	10.0	10.0	10.0	13.0
	165	6775	10.0	10.0	10.0	10.0	13.0
	169	6795	10.0	10.0	10.0	10.0	13.0
	173	6815	10.0	10.0	10.0	10.0	13.0
	177	6835	10.0	10.0	10.0	10.0	13.0
	181	6855	10.0	10.0	10.0	10.0	13.0
802.11ax HE20	117	6535	10.0	10.0	10.0	10.0	13.0
	121	6555	10.0	10.0	10.0	10.0	13.0
	125	6575	10.0	10.0	10.0	10.0	13.0
	129	6595	10.0	10.0	10.0	10.0	13.0
	133	6615	10.0	10.0	10.0	10.0	13.0
	137	6635	10.0	10.0	10.0	10.0	13.0
	141	6655	10.0	10.0	10.0	10.0	13.0
	145	6675	10.0	10.0	10.0	10.0	13.0
	149	6695	10.0	10.0	10.0	10.0	13.0
	153	6715	10.0	10.0	10.0	10.0	13.0
	157	6735	10.0	10.0	10.0	10.0	13.0
	161	6755	10.0	10.0	10.0	10.0	13.0
	165	6775	10.0	10.0	10.0	10.0	13.0
	169	6795	10.0	10.0	10.0	10.0	13.0
	173	6815	10.0	10.0	10.0	10.0	13.0
	177	6835	10.0	10.0	10.0	10.0	13.0
	181	6855	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	123	6565	10.0	10.0	10.0	10.0	13.0
	131	6605	10.0	10.0	10.0	10.0	13.0
	139	6645	10.0	10.0	10.0	10.0	13.0
	147	6685	10.0	10.0	10.0	10.0	13.0
	155	6725	10.0	10.0	10.0	10.0	13.0
	163	6765	10.0	10.0	10.0	10.0	13.0
	171	6805	10.0	10.0	10.0	10.0	13.0
	179	6845	10.0	10.0	10.0	10.0	13.0
802.11ax HE80	187	6885	10.0	10.0	10.0	10.0	13.0
	135	6625	10.0	10.0	10.0	10.0	13.0
	151	6705	10.0	10.0	10.0	10.0	13.0
	167	6785	10.0	10.0	10.0	10.0	13.0
802.11ax HE160	183	6865	10.0	10.0	10.0	10.0	13.0
	143	6665	10.0	10.0	10.0	10.0	13.0
	175	6825	10.0	10.0	10.0	10.0	13.0

Tune-up Power (Tablet mode)							
UNII-7_SP							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	117	6535	10.0	10.0	10.0	10.0	13.0
	121	6555	10.0	10.0	10.0	10.0	13.0
	125	6575	10.0	10.0	10.0	10.0	13.0
	129	6595	10.0	10.0	10.0	10.0	13.0
	133	6615	10.0	10.0	10.0	10.0	13.0
	137	6635	10.0	10.0	10.0	10.0	13.0
	141	6655	10.0	10.0	10.0	10.0	13.0
	145	6675	10.0	10.0	10.0	10.0	13.0
	149	6695	10.0	10.0	10.0	10.0	13.0
	153	6715	10.0	10.0	10.0	10.0	13.0
	157	6735	10.0	10.0	10.0	10.0	13.0
	161	6755	10.0	10.0	10.0	10.0	13.0
	165	6775	10.0	10.0	10.0	10.0	13.0
	169	6795	10.0	10.0	10.0	10.0	13.0
	173	6815	10.0	10.0	10.0	10.0	13.0
802.11be EHT40	177	6835	10.0	10.0	10.0	10.0	13.0
	181	6855	10.0	10.0	10.0	10.0	13.0
	123	6565	10.0	10.0	10.0	10.0	13.0
	131	6605	10.0	10.0	10.0	10.0	13.0
	139	6645	10.0	10.0	10.0	10.0	13.0
	147	6685	10.0	10.0	10.0	10.0	13.0
	155	6725	10.0	10.0	10.0	10.0	13.0
	163	6765	10.0	10.0	10.0	10.0	13.0
802.11be EHT80	171	6805	10.0	10.0	10.0	10.0	13.0
	179	6845	10.0	10.0	10.0	10.0	13.0
	187	6885	10.0	10.0	10.0	10.0	13.0
	135	6625	10.0	10.0	10.0	10.0	13.0
802.11be EHT160	151	6705	10.0	10.0	10.0	10.0	13.0
	167	6785	10.0	10.0	10.0	10.0	13.0
	183	6865	10.0	10.0	10.0	10.0	13.0
	143	6665	10.0	10.0	10.0	10.0	13.0
	175	6825	10.0	10.0	10.0	10.0	13.0

Tune-up Power (Tablet mode)							
UNII-5 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	7.5	7.5	1.5	1.5	4.5
	5	5975	7.5	7.5	1.5	1.5	4.5
	9	5995	7.5	7.5	1.5	1.5	4.5
	13	6015	7.5	7.5	1.5	1.5	4.5
	17	6035	7.5	7.5	1.5	1.5	4.5
	21	6055	7.5	7.5	1.5	1.5	4.5
	25	6075	7.5	7.5	1.5	1.5	4.5
	29	6095	7.5	7.5	1.5	1.5	4.5
	33	6115	7.5	7.5	1.5	1.5	4.5
	37	6135	7.5	7.5	1.5	1.5	4.5
	41	6155	7.5	7.5	1.5	1.5	4.5
	45	6175	7.5	7.5	1.5	1.5	4.5
	49	6195	7.5	7.5	1.5	1.5	4.5
	53	6215	7.5	7.5	1.5	1.5	4.5
	57	6235	7.5	7.5	1.5	1.5	4.5
	61	6255	7.5	7.5	1.5	1.5	4.5
	65	6275	7.5	7.5	1.5	1.5	4.5
	69	6295	7.5	7.5	1.5	1.5	4.5
	73	6315	7.5	7.5	1.5	1.5	4.5
	77	6335	7.5	7.5	1.5	1.5	4.5
	81	6355	7.5	7.5	1.5	1.5	4.5
802.11ax HE20	85	6375	7.5	7.5	1.5	1.5	4.5
	89	6395	7.5	7.5	1.5	1.5	4.5
	93	6415	7.5	7.5	1.5	1.5	4.5
	1	5955	7.5	7.5	4.5	4.5	7.5
	5	5975	7.5	7.5	4.5	4.5	7.5
	9	5995	7.5	7.5	4.5	4.5	7.5
	13	6015	7.5	7.5	4.5	4.5	7.5
	17	6035	7.5	7.5	4.5	4.5	7.5
	21	6055	7.5	7.5	4.5	4.5	7.5
	25	6075	7.5	7.5	4.5	4.5	7.5
	29	6095	7.5	7.5	4.5	4.5	7.5
	33	6115	7.5	7.5	4.5	4.5	7.5
	37	6135	7.5	7.5	4.5	4.5	7.5
	41	6155	7.5	7.5	4.5	4.5	7.5
	45	6175	7.5	7.5	4.5	4.5	7.5
	49	6195	7.5	7.5	4.5	4.5	7.5
	53	6215	7.5	7.5	4.5	4.5	7.5
	57	6235	7.5	7.5	4.5	4.5	7.5
	61	6255	7.5	7.5	4.5	4.5	7.5
	65	6275	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	69	6295	7.5	7.5	4.5	4.5	7.5
	73	6315	7.5	7.5	4.5	4.5	7.5
	77	6335	7.5	7.5	4.5	4.5	7.5
	81	6355	7.5	7.5	4.5	4.5	7.5
	85	6375	7.5	7.5	4.5	4.5	7.5
	89	6395	7.5	7.5	4.5	4.5	7.5
	93	6415	7.5	7.5	4.5	4.5	7.5
	3	5965	10.0	10.0	7.5	7.5	10.5
	11	6005	10.0	10.0	7.5	7.5	10.5
	19	6045	10.0	10.0	7.5	7.5	10.5
	27	6085	10.0	10.0	7.5	7.5	10.5
	35	6125	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	43	6165	10.0	10.0	7.5	7.5	10.5
	51	6205	10.0	10.0	7.5	7.5	10.5
	59	6245	10.0	10.0	7.5	7.5	10.5
	67	6285	10.0	10.0	7.5	7.5	10.5
	75	6325	10.0	10.0	7.5	7.5	10.5
	83	6365	10.0	10.0	7.5	7.5	10.5
	91	6405	10.0	10.0	7.5	7.5	10.5
	7	5985	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	23	6065	10.5	10.5	10.5	10.5	13.5
	39	6145	10.5	10.5	10.5	10.5	13.5
	55	6225	10.5	10.5	10.5	10.5	13.5
	71	6305	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	87	6385	10.5	10.5	10.5	10.5	13.5
	15	6025	10.5	10.5	10.5	10.5	13.5
	47	6185	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	79	6345	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Tablet mode)							
UNII-5 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	1	5955	7.5	7.5	4.5	4.5	7.5
	5	5975	7.5	7.5	4.5	4.5	7.5
	9	5995	7.5	7.5	4.5	4.5	7.5
	13	6015	7.5	7.5	4.5	4.5	7.5
	17	6035	7.5	7.5	4.5	4.5	7.5
	21	6055	7.5	7.5	4.5	4.5	7.5
	25	6075	7.5	7.5	4.5	4.5	7.5
	29	6095	7.5	7.5	4.5	4.5	7.5
	33	6115	7.5	7.5	4.5	4.5	7.5
	37	6135	7.5	7.5	4.5	4.5	7.5
	41	6155	7.5	7.5	4.5	4.5	7.5
	45	6175	7.5	7.5	4.5	4.5	7.5
	49	6195	7.5	7.5	4.5	4.5	7.5
	53	6215	7.5	7.5	4.5	4.5	7.5
	57	6235	7.5	7.5	4.5	4.5	7.5
	61	6255	7.5	7.5	4.5	4.5	7.5
	65	6275	7.5	7.5	4.5	4.5	7.5
	69	6295	7.5	7.5	4.5	4.5	7.5
	73	6315	7.5	7.5	4.5	4.5	7.5
	77	6335	7.5	7.5	4.5	4.5	7.5
	81	6355	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	85	6375	7.5	7.5	4.5	4.5	7.5
	89	6395	7.5	7.5	4.5	4.5	7.5
	93	6415	7.5	7.5	4.5	4.5	7.5
	3	5965	10.0	10.0	7.5	7.5	10.5
	11	6005	10.0	10.0	7.5	7.5	10.5
	19	6045	10.0	10.0	7.5	7.5	10.5
	27	6085	10.0	10.0	7.5	7.5	10.5
	35	6125	10.0	10.0	7.5	7.5	10.5
	43	6165	10.0	10.0	7.5	7.5	10.5
	51	6205	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	59	6245	10.0	10.0	7.5	7.5	10.5
	67	6285	10.0	10.0	7.5	7.5	10.5
	75	6325	10.0	10.0	7.5	7.5	10.5
	83	6365	10.0	10.0	7.5	7.5	10.5
	91	6405	10.0	10.0	7.5	7.5	10.5
	7	5985	10.5	10.5	10.5	10.5	13.5
802.11be EHT160	23	6065	10.5	10.5	10.5	10.5	13.5
	39	6145	10.5	10.5	10.5	10.5	13.5
	55	6225	10.5	10.5	10.5	10.5	13.5
	71	6305	10.5	10.5	10.5	10.5	13.5
	87	6385	10.5	10.5	10.5	10.5	13.5
802.11be EHT160	15	6025	10.5	10.5	10.5	10.5	13.5
	47	6185	10.5	10.5	10.5	10.5	13.5
	79	6345	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Tablet mode)							
UNII-6 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	7.5	7.5	2.0	2.0	5.0
	101	6455	7.5	7.5	2.0	2.0	5.0
	105	6475	7.5	7.5	2.0	2.0	5.0
	109	6495	7.5	7.5	2.0	2.0	5.0
	113	6515	7.5	7.5	2.0	2.0	5.0
802.11ax HE20	97	6435	7.5	7.5	4.5	4.5	7.5
	101	6455	7.5	7.5	4.5	4.5	7.5
	105	6475	7.5	7.5	4.5	4.5	7.5
	109	6495	7.5	7.5	4.5	4.5	7.5
	113	6515	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	99	6445	10.0	10.0	7.5	7.5	10.5
	107	6485	10.0	10.0	7.5	7.5	10.5
	115	6525	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	103	6465	11.5	10.5	10.5	10.5	13.5
	119	6545	10.0	10.0	10.0	10.0	13.0
802.11ax HE160	111	6505	11.5	10.5	11.5	10.5	14.04
802.11be EHT20	97	6435	7.5	7.5	4.5	4.5	7.5
	101	6455	7.5	7.5	4.5	4.5	7.5
	105	6475	7.5	7.5	4.5	4.5	7.5
	109	6495	7.5	7.5	4.5	4.5	7.5
	113	6515	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	99	6445	10.0	10.0	7.5	7.5	10.5
	107	6485	10.0	10.0	7.5	7.5	10.5
	115	6525	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	103	6465	11.5	10.5	10.5	10.5	13.5
	119	6545	10.0	10.0	10.0	10.0	13.0
802.11be EHT160	111	6505	11.5	10.5	11.5	10.5	14.04

Tune-up Power (Tablet mode)							
UNII-7_LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	7.5	7.5	1.5	1.5	4.5
	121	6555	7.5	7.5	1.5	1.5	4.5
	125	6575	7.5	7.5	1.5	1.5	4.5
	129	6595	7.5	7.5	1.5	1.5	4.5
	133	6615	7.5	7.5	1.5	1.5	4.5
	137	6635	7.5	7.5	1.5	1.5	4.5
	141	6655	7.5	7.5	1.5	1.5	4.5
	145	6675	7.5	7.5	1.5	1.5	4.5
	149	6695	7.5	7.5	1.5	1.5	4.5
	153	6715	7.5	7.5	1.5	1.5	4.5
	157	6735	7.5	7.5	1.5	1.5	4.5
	161	6755	7.5	7.5	1.5	1.5	4.5
	165	6775	7.5	7.5	1.5	1.5	4.5
	169	6795	7.5	7.5	1.5	1.5	4.5
	173	6815	7.5	7.5	1.5	1.5	4.5
	177	6835	7.5	7.5	1.5	1.5	4.5
	181	6855	7.5	7.5	1.5	1.5	4.5
802.11ax HE20	117	6535	7.5	7.5	4.5	4.5	7.5
	121	6555	7.5	7.5	4.5	4.5	7.5
	125	6575	7.5	7.5	4.5	4.5	7.5
	129	6595	7.5	7.5	4.5	4.5	7.5
	133	6615	7.5	7.5	4.5	4.5	7.5
	137	6635	7.5	7.5	4.5	4.5	7.5
	141	6655	7.5	7.5	4.5	4.5	7.5
	145	6675	7.5	7.5	4.5	4.5	7.5
	149	6695	7.5	7.5	4.5	4.5	7.5
	153	6715	7.5	7.5	4.5	4.5	7.5
	157	6735	7.5	7.5	4.5	4.5	7.5
	161	6755	7.5	7.5	4.5	4.5	7.5
	165	6775	7.5	7.5	4.5	4.5	7.5
	169	6795	7.5	7.5	4.5	4.5	7.5
	173	6815	7.5	7.5	4.5	4.5	7.5
	177	6835	7.5	7.5	4.5	4.5	7.5
	181	6855	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	123	6565	10.0	10.0	7.5	7.5	10.5
	131	6605	10.0	10.0	7.5	7.5	10.5
	139	6645	10.0	10.0	7.5	7.5	10.5
	147	6685	10.0	10.0	7.5	7.5	10.5
	155	6725	10.0	10.0	7.5	7.5	10.5
	163	6765	10.0	10.0	7.5	7.5	10.5
	171	6805	10.0	10.0	7.5	7.5	10.5
	179	6845	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	187	6885	10.0	10.0	7.5	7.5	10.5
	135	6625	10.0	10.0	10.0	10.0	13.0
	151	6705	10.0	10.0	10.0	10.0	13.0
	167	6785	10.0	10.0	10.0	10.0	13.0
802.11ax HE160	183	6865	10.0	10.0	10.0	10.0	13.0
	143	6665	10.0	10.0	10.0	10.0	13.0
	175	6825	10.0	10.0	10.0	10.0	13.0

Tune-up Power (Tablet mode)							
UNII-7_LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11be EHT20	117	6535	7.5	7.5	4.5	4.5	7.5
	121	6555	7.5	7.5	4.5	4.5	7.5
	125	6575	7.5	7.5	4.5	4.5	7.5
	129	6595	7.5	7.5	4.5	4.5	7.5
	133	6615	7.5	7.5	4.5	4.5	7.5
	137	6635	7.5	7.5	4.5	4.5	7.5
	141	6655	7.5	7.5	4.5	4.5	7.5
	145	6675	7.5	7.5	4.5	4.5	7.5
	149	6695	7.5	7.5	4.5	4.5	7.5
	153	6715	7.5	7.5	4.5	4.5	7.5
	157	6735	7.5	7.5	4.5	4.5	7.5
	161	6755	7.5	7.5	4.5	4.5	7.5
	165	6775	7.5	7.5	4.5	4.5	7.5
	169	6795	7.5	7.5	4.5	4.5	7.5
	173	6815	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	177	6835	7.5	7.5	4.5	4.5	7.5
	181	6855	7.5	7.5	4.5	4.5	7.5
	123	6565	10.0	10.0	7.5	7.5	10.5
	131	6605	10.0	10.0	7.5	7.5	10.5
	139	6645	10.0	10.0	7.5	7.5	10.5
	147	6685	10.0	10.0	7.5	7.5	10.5
	155	6725	10.0	10.0	7.5	7.5	10.5
	163	6765	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	171	6805	10.0	10.0	7.5	7.5	10.5
	179	6845	10.0	10.0	7.5	7.5	10.5
	187	6885	10.0	10.0	7.5	7.5	10.5
	135	6625	10.0	10.0	10.0	10.0	13.0
802.11be EHT160	151	6705	10.0	10.0	10.0	10.0	13.0
	167	6785	10.0	10.0	10.0	10.0	13.0
	183	6865	10.0	10.0	10.0	10.0	13.0
802.11be EHT160	143	6665	10.0	10.0	10.0	10.0	13.0
	175	6825	10.0	10.0	10.0	10.0	13.0

Tune-up Power (Tablet mode)							
UNII-8 LPI							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	185	6875	7.5	7.5	2.0	2.0	5.0
	189	6895	7.5	7.5	2.0	2.0	5.0
	193	6915	7.5	7.5	2.0	2.0	5.0
	197	6935	7.5	7.5	2.0	2.0	5.0
	201	6955	7.5	7.5	2.0	2.0	5.0
	205	6975	7.5	7.5	2.0	2.0	5.0
	209	6995	7.5	7.5	2.0	2.0	5.0
	213	7015	7.5	7.5	2.0	2.0	5.0
	217	7035	7.5	7.5	2.0	2.0	5.0
	221	7055	7.5	7.5	2.0	2.0	5.0
	225	7075	7.5	7.5	2.0	2.0	5.0
	229	7095	7.5	7.5	2.0	2.0	5.0
	233	7115	7.5	7.5	2.0	2.0	5.0
802.11ax HE20	185	6875	7.5	7.5	4.5	4.5	7.5
	189	6895	7.5	7.5	4.5	4.5	7.5
	193	6915	7.5	7.5	4.5	4.5	7.5
	197	6935	7.5	7.5	4.5	4.5	7.5
	201	6955	7.5	7.5	4.5	4.5	7.5
	205	6975	7.5	7.5	4.5	4.5	7.5
	209	6995	7.5	7.5	4.5	4.5	7.5
	213	7015	7.5	7.5	4.5	4.5	7.5
	217	7035	7.5	7.5	4.5	4.5	7.5
	221	7055	7.5	7.5	4.5	4.5	7.5
	225	7075	7.5	7.5	4.5	4.5	7.5
	229	7095	7.5	7.5	4.5	4.5	7.5
	233	7115	7.5	7.5	4.5	4.5	7.5
802.11ax HE40	195	6925	10.0	10.0	7.5	7.5	10.5
	203	6965	10.0	10.0	7.5	7.5	10.5
	211	7005	10.0	10.0	7.5	7.5	10.5
	219	7045	10.0	10.0	7.5	7.5	10.5
	227	7085	10.0	10.0	7.5	7.5	10.5
802.11ax HE80	199	6945	10.0	10.0	10.0	10.0	13.0
	215	7025	10.0	10.0	10.0	10.0	13.0
802.11ax HE160	207	6985	10.0	10.0	10.0	10.0	13.0
802.11be EHT20	185	6875	7.5	7.5	4.5	4.5	7.5
	189	6895	7.5	7.5	4.5	4.5	7.5
	193	6915	7.5	7.5	4.5	4.5	7.5
	197	6935	7.5	7.5	4.5	4.5	7.5
	201	6955	7.5	7.5	4.5	4.5	7.5
	205	6975	7.5	7.5	4.5	4.5	7.5
	209	6995	7.5	7.5	4.5	4.5	7.5
	213	7015	7.5	7.5	4.5	4.5	7.5
	217	7035	7.5	7.5	4.5	4.5	7.5
	221	7055	7.5	7.5	4.5	4.5	7.5
	225	7075	7.5	7.5	4.5	4.5	7.5
	229	7095	7.5	7.5	4.5	4.5	7.5
	233	7115	7.5	7.5	4.5	4.5	7.5
802.11be EHT40	195	6925	10.0	10.0	7.5	7.5	10.5
	203	6965	10.0	10.0	7.5	7.5	10.5
	211	7005	10.0	10.0	7.5	7.5	10.5
	219	7045	10.0	10.0	7.5	7.5	10.5
	227	7085	10.0	10.0	7.5	7.5	10.5
802.11be EHT80	199	6945	10.0	10.0	10.0	10.0	13.0
	215	7025	10.0	10.0	10.0	10.0	13.0
802.11be EHT160	207	6985	10.0	10.0	10.0	10.0	13.0

Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WCDMA Conducted Power (Full)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	23.23	23.26	23.45	23.61	23.74	23.81	23.81	23.72	23.61
HSDPA Subtest-1	23.13	23.15	23.32	23.53	23.61	23.67	23.69	23.62	23.53
HSDPA Subtest-2	23.12	23.19	23.31	23.54	23.61	23.72	23.69	23.63	23.46
HSDPA Subtest-3	22.64	22.70	22.82	23.00	23.10	23.18	23.19	23.14	23.01
HSDPA Subtest-4	22.65	22.64	22.90	23.05	23.14	23.16	23.26	23.13	23.03
DC-HSDPA Subtest-1	23.16	23.15	23.36	23.47	23.67	23.69	23.66	23.61	23.49
DC-HSDPA Subtest-2	23.18	23.13	23.31	23.46	23.63	23.69	23.67	23.59	23.47
DC-HSDPA Subtest-3	22.65	22.71	22.85	22.97	23.11	23.17	23.16	23.10	23.05
DC-HSDPA Subtest-4	22.61	22.64	22.85	23.03	23.15	23.17	23.22	23.07	23.05
HSUPA Subtest-1	23.15	23.15	23.37	23.52	23.68	23.76	23.71	23.57	23.53
HSUPA Subtest-2	21.17	21.15	21.40	21.46	21.65	21.69	21.72	21.61	21.51
HSUPA Subtest-3	22.17	22.19	22.32	22.55	22.65	22.72	22.68	22.64	22.51
HSUPA Subtest-4	21.14	21.15	21.31	21.47	21.66	21.72	21.69	21.61	21.50
HSUPA Subtest-5	23.13	23.20	23.38	23.54	23.59	23.73	23.71	23.66	23.52

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	22.79	22.77	22.85	0
		1	50	22.66	22.71	22.79	0
		1	99	22.72	22.70	22.78	0
		50	0	21.84	21.82	21.90	1
		50	25	21.73	21.70	21.83	1
		50	50	21.73	21.72	21.76	1
		100	0	21.86	21.84	21.92	1
20M	16QAM	1	0	21.71	21.69	21.72	1
		1	50	21.66	21.65	21.75	1
		1	99	21.71	21.62	21.72	1
		50	0	20.72	20.72	20.74	2
		50	25	20.71	20.63	20.80	2
		50	50	20.66	20.70	20.79	2
		100	0	20.67	20.68	20.73	2
20M	64QAM	1	0	20.73	20.71	20.73	2
		1	50	20.73	20.72	20.72	2
		1	99	20.66	20.66	20.75	2
		50	0	19.67	19.62	19.72	3
		50	25	19.68	19.72	19.78	3
		50	50	19.71	19.67	19.80	3
		100	0	19.67	19.63	19.75	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	22.66	22.72	22.74	0
		1	37	22.71	22.66	22.73	0
		1	74	22.70	22.67	22.72	0
		36	0	21.71	21.77	21.79	1
		36	19	21.69	21.76	21.80	1
		36	39	21.69	21.77	21.84	1
		75	0	21.73	21.79	21.81	1
15M	16QAM	1	0	21.68	21.62	21.74	1
		1	37	21.67	21.68	21.77	1
		1	74	21.73	21.63	21.74	1
		36	0	20.64	20.71	20.74	2
		36	19	20.71	20.64	20.78	2
		36	39	20.70	20.64	20.77	2
		75	0	20.71	20.66	20.71	2
15M	64QAM	1	0	20.72	20.62	20.71	2
		1	37	20.64	20.72	20.71	2
		1	74	20.74	20.63	20.75	2
		36	0	19.67	19.62	19.72	3
		36	19	19.69	19.72	19.79	3
		36	39	19.72	19.67	19.74	3
		75	0	19.73	19.62	19.71	3

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	22.68	22.68	22.75	0
		1	24	22.74	22.67	22.71	0
		1	49	22.71	22.62	22.77	0
		25	0	21.73	21.73	21.80	1
		25	12	21.73	21.69	21.85	1
		25	25	21.73	21.73	21.80	1
		50	0	21.75	21.75	21.82	1
10M	16QAM	1	0	21.64	21.65	21.74	1
		1	24	21.64	21.65	21.80	1
		1	49	21.74	21.71	21.80	1
		25	0	20.68	20.68	20.78	2
		25	12	20.69	20.66	20.80	2
		25	25	20.66	20.71	20.77	2
		50	0	20.64	20.62	20.73	2
10M	64QAM	1	0	20.73	20.69	20.76	2
		1	24	20.72	20.72	20.73	2
		1	49	20.70	20.70	20.77	2
		25	0	19.64	19.68	19.78	3
		25	12	19.68	19.66	19.73	3
		25	25	19.69	19.72	19.80	3
		50	0	19.71	19.69	19.73	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	22.68	22.64	22.74	0
		1	12	22.74	22.68	22.80	0
		1	24	22.68	22.64	22.80	0
		12	0	21.73	21.69	21.79	1
		12	6	21.73	21.71	21.83	1
		12	13	21.69	21.73	21.79	1
		25	0	21.75	21.71	21.81	1
5M	16QAM	1	0	21.68	21.69	21.76	1
		1	12	21.73	21.65	21.71	1
		1	24	21.67	21.69	21.80	1
		12	0	20.70	20.65	20.75	2
		12	6	20.67	20.65	20.74	2
		12	13	20.70	20.66	20.78	2
		25	0	20.73	20.69	20.72	2
5M	64QAM	1	0	20.68	20.64	20.74	2
		1	12	20.72	20.63	20.71	2
		1	24	20.72	20.67	20.74	2
		12	0	19.71	19.71	19.78	3
		12	6	19.74	19.63	19.74	3
		12	13	19.74	19.71	19.79	3
		25	0	19.65	19.64	19.79	3

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	22.68	22.72	22.78	0
		1	7	22.74	22.64	22.78	0
		1	14	22.65	22.69	22.80	0
		8	0	21.73	21.77	21.83	1
		8	3	21.71	21.75	21.76	1
		8	7	21.75	21.76	21.83	1
		15	0	21.75	21.79	21.85	1
3M	16QAM	1	0	21.66	21.67	21.73	1
		1	7	21.71	21.65	21.72	1
		1	14	21.69	21.70	21.73	1
		8	0	20.71	20.63	20.79	2
		8	3	20.66	20.62	20.75	2
		8	7	20.69	20.63	20.73	2
		15	0	20.74	20.70	20.80	2
3M	64QAM	1	0	20.71	20.62	20.72	2
		1	7	20.73	20.70	20.74	2
		1	14	20.73	20.64	20.79	2
		8	0	19.71	19.72	19.75	3
		8	3	19.71	19.63	19.73	3
		8	7	19.66	19.67	19.80	3
		15	0	19.67	19.64	19.74	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	22.65	22.72	22.73	0
		1	2	22.70	22.67	22.76	0
		1	5	22.67	22.65	22.80	0
		3	0	22.67	22.72	22.74	0
		3	1	22.71	22.67	22.76	0
		3	3	22.66	22.66	22.71	0
		6	0	21.65	21.64	21.78	1
1.4M	16QAM	1	0	21.73	21.68	21.80	1
		1	2	21.69	21.68	21.75	1
		1	5	21.69	21.67	21.74	1
		3	0	21.65	21.65	21.73	1
		3	1	21.66	21.63	21.80	1
		3	3	21.72	21.72	21.75	1
		6	0	20.66	20.72	20.77	2
1.4M	64QAM	1	0	20.68	20.67	20.73	2
		1	2	20.68	20.69	20.74	2
		1	5	20.74	20.63	20.72	2
		3	0	20.71	20.63	20.75	2
		3	1	20.65	20.68	20.72	2
		3	3	20.73	20.66	20.75	2
		6	0	19.71	19.67	19.79	3

LTE Conducted Power (Full)

LTE Band 4

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.11	23.18	23.12	0
		1	50	22.96	23.12	23.01	0
		1	99	22.99	23.13	22.99	0
		50	0	22.16	22.23	22.17	1
		50	25	22.07	22.08	22.09	1
		50	50	22.11	22.16	22.06	1
		100	0	22.18	22.25	22.19	1
20M	16QAM	1	0	22.05	22.13	21.98	1
		1	50	21.98	22.09	22.06	1
		1	99	22.05	22.13	22.01	1
		50	0	21.02	21.05	21.00	2
		50	25	21.01	21.08	21.00	2
		50	50	20.98	21.10	21.02	2
		100	0	21.06	21.06	21.07	2
20M	64QAM	1	0	21.02	21.09	21.04	2
		1	50	21.02	21.12	21.05	2
		1	99	21.02	21.07	21.05	2
		50	0	20.04	20.07	20.01	3
		50	25	20.04	20.04	20.07	3
		50	50	20.05	20.03	20.01	3
		100	0	20.05	20.10	20.03	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	23.01	23.06	23.01	0
		1	37	23.01	23.03	22.99	0
		1	74	23.05	23.05	23.04	0
		36	0	22.06	22.11	22.06	1
		36	19	22.11	22.09	22.11	1
		36	39	22.08	22.15	22.07	1
		75	0	22.08	22.13	22.08	1
15M	16QAM	1	0	21.96	22.11	22.07	1
		1	37	22.05	22.03	22.07	1
		1	74	21.96	22.13	21.99	1
		36	0	21.02	21.09	21.06	2
		36	19	21.04	21.07	21.05	2
		36	39	21.02	21.10	20.99	2
		75	0	21.00	21.07	21.00	2
15M	64QAM	1	0	20.96	21.06	21.00	2
		1	37	21.02	21.03	21.06	2
		1	74	21.00	21.11	21.02	2
		36	0	20.01	20.09	20.04	3
		36	19	20.04	20.13	20.01	3
		36	39	20.03	20.11	20.03	3
		75	0	20.05	20.10	20.04	3

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	23.05	23.09	22.99	0
		1	24	23.04	23.11	23.04	0
		1	49	22.96	23.06	23.02	0
		25	0	22.10	22.14	22.04	1
		25	12	22.09	22.13	22.07	1
		25	25	22.05	22.08	22.06	1
10M	16QAM	50	0	22.12	22.16	22.06	1
		1	0	21.97	22.07	22.04	1
		1	24	22.00	22.09	21.98	1
		1	49	22.02	22.03	22.05	1
		25	0	21.05	21.10	21.07	2
		25	12	20.98	21.13	21.02	2
10M	64QAM	25	25	21.03	21.06	21.03	2
		50	0	20.97	21.13	20.99	2
		1	0	21.04	21.09	21.00	2
		1	24	21.02	21.06	21.00	2
		1	49	21.03	21.07	21.07	2
		25	0	20.03	20.11	20.01	3
5M	QPSK	25	12	20.03	20.03	20.04	3
		25	25	20.01	20.07	20.03	3
		50	0	20.03	20.11	20.05	3
		1	0	23.01	23.09	23.00	0
		1	12	23.06	23.03	23.05	0
		1	24	22.97	23.07	23.00	0
5M	16QAM	12	0	22.06	22.14	22.05	1
		12	6	22.04	22.14	22.06	1
		12	13	22.07	22.16	22.03	1
		25	0	22.08	22.16	22.07	1
		1	0	22.02	22.04	21.99	1
		1	12	22.02	22.09	22.07	1
5M	64QAM	1	24	22.01	22.07	22.06	1
		12	0	21.04	21.12	20.98	2
		12	6	21.03	21.03	21.01	2
		12	13	20.98	21.11	21.03	2
		25	0	20.97	21.10	21.02	2
		1	0	20.99	21.09	21.03	2
5M	QPSK	1	12	20.96	21.05	21.06	2
		1	24	20.98	21.13	21.03	2
		12	0	20.03	20.09	20.07	3
		12	6	19.96	20.10	19.98	3
		12	13	20.06	20.05	20.04	3
		25	0	20.04	20.11	20.06	3

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	23.05	23.12	23.00	0
		1	7	23.03	23.12	23.01	0
		1	14	22.99	23.05	22.98	0
		8	0	22.10	22.17	22.05	1
		8	3	22.10	22.10	22.05	1
		8	7	22.03	22.11	22.06	1
		15	0	22.12	22.19	22.07	1
3M	16QAM	1	0	22.03	22.13	22.04	1
		1	7	22.04	22.06	22.05	1
		1	14	21.96	22.08	22.02	1
		8	0	20.97	21.04	21.03	2
		8	3	21.05	21.04	21.07	2
		8	7	21.03	21.09	21.00	2
		15	0	21.03	21.06	21.02	2
3M	64QAM	1	0	20.97	21.11	20.98	2
		1	7	21.06	21.06	21.02	2
		1	14	21.01	21.09	21.02	2
		8	0	20.03	20.08	20.02	3
		8	3	20.02	20.12	19.98	3
		8	7	20.04	20.04	19.99	3
		15	0	19.99	20.10	20.02	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	22.97	23.06	23.04	0
		1	2	23.06	23.03	23.01	0
		1	5	23.04	23.09	22.98	0
		3	0	23.00	23.06	23.05	0
		3	1	23.06	23.13	23.06	0
		3	3	22.99	23.07	23.04	0
		6	0	22.03	22.05	22.02	1
1.4M	16QAM	1	0	22.01	22.12	22.05	1
		1	2	21.98	22.09	22.03	1
		1	5	21.96	22.06	22.01	1
		3	0	21.96	22.08	22.00	1
		3	1	21.98	22.09	21.99	1
		3	3	21.99	22.06	22.00	1
		6	0	20.96	21.07	21.07	2
1.4M	64QAM	1	0	20.96	21.08	20.98	2
		1	2	20.97	21.03	21.06	2
		1	5	20.96	21.04	21.05	2
		3	0	21.01	21.13	21.05	2
		3	1	21.06	21.13	21.07	2
		3	3	21.00	21.11	21.06	2
		6	0	20.04	20.06	20.06	3

LTE Conducted Power (Full)

LTE Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	24.04	24.11	24.09	0
		1	24	23.90	24.03	23.94	0
		1	49	23.97	23.99	24.00	0
		25	0	23.09	23.16	23.14	1
		25	12	22.97	23.03	23.03	1
		25	25	22.97	23.08	23.02	1
		50	0	23.11	23.18	23.16	1
10M	16QAM	1	0	22.91	23.06	22.95	1
		1	24	22.94	23.01	23.00	1
		1	49	22.99	22.98	22.97	1
		25	0	21.91	21.97	22.02	2
		25	12	21.93	22.04	21.95	2
		25	25	21.90	21.97	21.97	2
		50	0	21.89	21.97	21.94	2
10M	64QAM	1	0	21.89	21.97	22.04	2
		1	24	21.90	22.04	22.02	2
		1	49	21.92	22.06	22.04	2
		25	0	20.97	20.98	20.95	3
		25	12	20.94	20.99	21.01	3
		25	25	20.94	20.96	20.97	3
		50	0	20.92	20.98	21.01	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	23.89	23.98	24.02	0
		1	12	23.90	23.99	23.94	0
		1	24	23.91	24.02	24.04	0
		12	0	22.94	23.03	23.07	1
		12	6	22.94	23.07	23.07	1
		12	13	22.98	23.07	23.08	1
		25	0	22.96	23.05	23.09	1
5M	16QAM	1	0	22.90	23.04	22.99	1
		1	12	22.96	23.02	22.95	1
		1	24	22.92	22.99	23.00	1
		12	0	21.92	22.01	22.01	2
		12	6	21.97	21.96	22.02	2
		12	13	21.98	22.01	21.97	2
		25	0	21.93	21.96	22.04	2
5M	64QAM	1	0	21.95	22.02	21.97	2
		1	12	21.96	21.98	22.04	2
		1	24	21.94	22.02	21.94	2
		12	0	20.98	21.04	20.96	3
		12	6	20.94	21.06	20.95	3
		12	13	20.98	21.05	20.99	3
		25	0	20.95	21.00	20.99	3

LTE Conducted Power (Full)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	23.92	24.05	24.03	0
		1	7	23.93	23.98	24.00	0
		1	14	23.91	24.03	24.00	0
		8	0	22.97	23.10	23.08	1
		8	3	23.01	23.08	23.02	1
		8	7	22.94	23.03	23.09	1
		15	0	22.99	23.12	23.10	1
3M	16QAM	1	0	22.93	23.05	23.03	1
		1	7	22.99	23.01	23.02	1
		1	14	22.92	23.04	23.00	1
		8	0	21.92	22.03	22.01	2
		8	3	21.95	22.00	21.96	2
		8	7	21.93	22.03	21.97	2
		15	0	21.98	22.04	21.98	2
3M	64QAM	1	0	21.92	21.96	22.04	2
		1	7	21.98	22.03	21.95	2
		1	14	21.90	22.06	22.04	2
		8	0	20.99	21.06	21.01	3
		8	3	20.98	21.06	20.96	3
		8	7	20.99	21.02	21.04	3
		15	0	20.99	20.99	21.00	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	23.91	24.06	24.03	0
		1	2	23.98	24.02	23.94	0
		1	5	23.94	23.96	23.97	0
		3	0	23.95	24.02	23.99	0
		3	1	23.96	24.03	23.97	0
		3	3	23.97	24.05	23.99	0
		6	0	22.93	23.02	22.97	1
1.4M	16QAM	1	0	22.97	23.03	23.00	1
		1	2	22.89	23.00	22.96	1
		1	5	22.96	22.97	23.01	1
		3	0	22.94	22.99	22.95	1
		3	1	22.95	23.04	23.02	1
		3	3	22.95	23.03	23.04	1
		6	0	21.94	21.99	21.94	2
1.4M	64QAM	1	0	21.98	21.98	22.04	2
		1	2	21.96	21.99	22.00	2
		1	5	21.97	22.06	22.00	2
		3	0	21.92	21.98	22.01	2
		3	1	21.92	22.00	22.04	2
		3	3	21.98	22.04	21.99	2
		6	0	20.93	21.01	20.94	3

LTE Conducted Power (Full)

LTE Band 7

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.19	23.37	23.31	0
		1	50	23.08	23.23	23.22	0
		1	99	23.11	23.27	23.22	0
		50	0	22.24	22.42	22.36	1
		50	25	22.11	22.36	22.21	1
		50	50	22.13	22.32	22.25	1
		100	0	22.26	22.44	22.38	1
20M	16QAM	1	0	22.09	22.30	22.23	1
		1	50	22.08	22.27	22.22	1
		1	99	22.11	22.26	22.25	1
		50	0	21.10	21.26	21.23	2
		50	25	21.08	21.27	21.16	2
		50	50	21.11	21.28	21.19	2
		100	0	21.11	21.25	21.20	2
20M	64QAM	1	0	21.13	21.29	21.24	2
		1	50	21.05	21.28	21.26	2
		1	99	21.11	21.28	21.16	2
		50	0	20.14	20.28	20.20	3
		50	25	20.14	20.30	20.19	3
		50	50	20.05	20.23	20.22	3
		100	0	20.14	20.32	20.18	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.13	23.29	23.26	0
		1	37	23.08	23.24	23.17	0
		1	74	23.14	23.28	23.24	0
		36	0	22.18	22.34	22.31	1
		36	19	22.16	22.34	22.26	1
		36	39	22.10	22.29	22.30	1
		75	0	22.20	22.36	22.33	1
15M	16QAM	1	0	22.12	22.31	22.24	1
		1	37	22.07	22.29	22.22	1
		1	74	22.05	22.26	22.17	1
		36	0	21.12	21.24	21.16	2
		36	19	21.14	21.31	21.22	2
		36	39	21.12	21.26	21.18	2
		75	0	21.13	21.24	21.20	2
15M	64QAM	1	0	21.14	21.27	21.23	2
		1	37	21.10	21.25	21.17	2
		1	74	21.06	21.23	21.26	2
		36	0	20.05	20.25	20.16	3
		36	19	20.11	20.27	20.18	3
		36	39	20.09	20.23	20.22	3
		75	0	20.08	20.31	20.16	3

LTE Conducted Power (Full)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.06	23.31	23.21	0
		1	24	23.05	23.28	23.21	0
		1	49	23.05	23.26	23.23	0
		25	0	22.11	22.36	22.26	1
		25	12	22.13	22.35	22.31	1
		25	25	22.16	22.30	22.29	1
10M	16QAM	50	0	22.13	22.38	22.28	1
		1	0	22.10	22.28	22.21	1
		1	24	22.13	22.27	22.22	1
		1	49	22.08	22.24	22.25	1
		25	0	21.07	21.25	21.19	2
		25	12	21.07	21.28	21.25	2
10M	64QAM	25	25	21.06	21.28	21.16	2
		50	0	21.11	21.27	21.17	2
		1	0	21.06	21.26	21.17	2
		1	24	21.09	21.28	21.22	2
		1	49	21.10	21.32	21.17	2
		25	0	20.10	20.25	20.18	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	25	25	20.07	20.29	20.21	3
		50	0	20.05	20.31	20.26	3
		1	0	23.11	23.30	23.23	0
		1	12	23.10	23.28	23.17	0
		1	24	23.06	23.31	23.22	0
		12	0	22.16	22.35	22.28	1
5M	16QAM	12	6	22.15	22.35	22.26	1
		12	13	22.14	22.36	22.21	1
		25	0	22.18	22.37	22.30	1
		1	0	22.08	22.27	22.25	1
		1	12	22.07	22.30	22.19	1
		1	24	22.12	22.26	22.17	1
5M	64QAM	12	0	21.09	21.23	21.19	2
		12	6	21.08	21.23	21.19	2
		12	13	21.09	21.32	21.21	2
		25	0	21.08	21.24	21.22	2
		1	0	21.12	21.31	21.25	2
		1	12	21.12	21.25	21.25	2
5M	64QAM	1	24	21.11	21.26	21.17	2
		12	0	20.07	20.27	20.18	3
		12	6	20.10	20.29	20.16	3
		12	13	20.14	20.25	20.20	3
		25	0	20.13	20.24	20.21	3

LTE Conducted Power (Full)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	24.07	24.12	24.35	0
		1	24	24.01	24.00	24.22	0
		1	49	24.02	24.00	24.28	0
		25	0	23.12	23.17	23.40	1
		25	12	23.07	23.09	23.29	1
		25	25	22.98	23.06	23.31	1
		50	0	23.14	23.19	23.42	1
10M	16QAM	1	0	22.98	23.02	23.28	1
		1	24	22.95	23.00	23.29	1
		1	49	23.01	23.02	23.27	1
		25	0	22.01	22.07	22.22	2
		25	12	21.93	22.05	22.24	2
		25	25	21.96	22.06	22.28	2
		50	0	22.00	22.03	22.23	2
10M	64QAM	1	0	22.01	22.06	22.27	2
		1	24	22.01	21.98	22.22	2
		1	49	21.93	21.99	22.22	2
		25	0	20.94	21.01	21.23	3
		25	12	21.02	21.04	21.26	3
		25	25	20.95	21.07	21.22	3
		50	0	20.92	21.03	21.30	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	23.92	24.07	24.21	0
		1	12	24.02	24.06	24.29	0
		1	24	23.95	24.02	24.27	0
		12	0	22.97	23.12	23.26	1
		12	6	23.05	23.10	23.27	1
		12	13	23.07	23.05	23.28	1
		25	0	22.99	23.14	23.28	1
5M	16QAM	1	0	22.92	22.98	23.22	1
		1	12	23.00	23.05	23.24	1
		1	24	22.96	23.03	23.24	1
		12	0	21.99	22.06	22.26	2
		12	6	22.02	22.00	22.22	2
		12	13	21.97	22.01	22.27	2
		25	0	22.02	21.99	22.30	2
5M	64QAM	1	0	21.94	22.07	22.27	2
		1	12	22.02	22.03	22.24	2
		1	24	21.93	22.07	22.25	2
		12	0	20.96	20.99	21.26	3
		12	6	20.98	20.99	21.25	3
		12	13	20.97	21.00	21.29	3
		25	0	20.97	21.01	21.24	3

LTE Conducted Power (Full)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	23.98	24.06	24.26	0
		1	7	23.99	24.06	24.22	0
		1	14	23.96	24.00	24.27	0
		8	0	23.03	23.11	23.31	1
		8	3	23.03	23.07	23.29	1
		8	7	23.04	23.07	23.34	1
		15	0	23.05	23.13	23.33	1
3M	16QAM	1	0	22.96	23.06	23.29	1
		1	7	22.98	23.00	23.29	1
		1	14	22.92	23.03	23.28	1
		8	0	21.94	22.05	22.25	2
		8	3	21.96	21.99	22.27	2
		8	7	21.97	22.05	22.24	2
		15	0	21.97	22.06	22.30	2
3M	64QAM	1	0	22.01	22.02	22.21	2
		1	7	21.96	22.03	22.30	2
		1	14	22.00	22.00	22.22	2
		8	0	20.96	21.02	21.24	3
		8	3	21.01	20.99	21.27	3
		8	7	21.00	21.06	21.25	3
		15	0	20.97	21.04	21.30	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	24.02	24.04	24.28	0
		1	2	24.01	24.00	24.29	0
		1	5	24.00	23.98	24.24	0
		3	0	23.94	24.03	24.21	0
		3	1	23.99	24.04	24.21	0
		3	3	23.95	24.06	24.26	0
		6	0	23.01	22.98	23.24	1
1.4M	16QAM	1	0	23.02	23.02	23.22	1
		1	2	22.97	23.00	23.23	1
		1	5	22.94	23.02	23.27	1
		3	0	22.93	23.02	23.28	1
		3	1	23.02	23.00	23.23	1
		3	3	23.00	23.01	23.22	1
		6	0	21.98	22.06	22.25	2
1.4M	64QAM	1	0	22.01	22.00	22.21	2
		1	2	21.92	21.99	22.21	2
		1	5	21.93	21.98	22.30	2
		3	0	21.92	22.01	22.23	2
		3	1	21.92	21.98	22.21	2
		3	3	21.93	22.00	22.29	2
		6	0	20.98	21.00	21.25	3

LTE Conducted Power (Full)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		24.06		0
		1	24		24.02		0
		1	49		23.91		0
		25	0		23.11		1
		25	12		23.06		1
		25	25		23.02		1
		50	0		23.13		1
10M	16QAM	1	0		22.93		1
		1	24		22.96		1
		1	49		22.94		1
		25	0		21.91		2
		25	12		21.95		2
		25	25		21.98		2
		50	0		22.01		2
10M	64QAM	1	0		21.96		2
		1	24		21.95		2
		1	49		21.96		2
		25	0		21.01		3
		25	12		20.91		3
		25	25		20.98		3
		50	0		20.97		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	23.88	23.96	23.88	0
		1	12	23.96	23.97	23.88	0
		1	24	23.92	23.96	23.90	0
		12	0	22.93	23.01	22.93	1
		12	6	22.99	22.96	22.90	1
		12	13	22.93	22.99	22.94	1
		25	0	22.95	23.03	22.95	1
5M	16QAM	1	0	22.93	22.92	22.85	1
		1	12	22.96	22.91	22.89	1
		1	24	22.94	22.92	22.90	1
		12	0	21.87	21.92	21.88	2
		12	6	21.93	21.95	21.89	2
		12	13	21.96	21.96	21.85	2
		25	0	21.89	22.01	21.89	2
5M	64QAM	1	0	21.90	22.00	21.91	2
		1	12	21.91	21.92	21.89	2
		1	24	21.92	21.92	21.89	2
		12	0	20.94	21.01	20.85	3
		12	6	20.88	20.96	20.83	3
		12	13	20.93	20.92	20.93	3
		25	0	20.90	21.01	20.83	3

LTE Conducted Power (Full)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		23.84		0
		1	24		23.77		0
		1	49		23.77		0
		25	0		22.89		1
		25	12		22.80		1
		25	25		22.76		1
		50	0		22.91		1
10M	16QAM	1	0		22.78		1
		1	24		22.73		1
		1	49		22.75		1
		25	0		21.77		2
		25	12		21.69		2
		25	25		21.79		2
		50	0		21.79		2
10M	64QAM	1	0		21.77		2
		1	24		21.73		2
		1	49		21.75		2
		25	0		20.73		3
		25	12		20.69		3
		25	25		20.77		3
		50	0		20.69		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	23.69	23.79	23.74	0
		1	12	23.76	23.79	23.74	0
		1	24	23.68	23.73	23.72	0
		12	0	22.74	22.84	22.79	1
		12	6	22.79	22.80	22.72	1
		12	13	22.78	22.77	22.73	1
		25	0	22.76	22.86	22.81	1
5M	16QAM	1	0	22.69	22.74	22.69	1
		1	12	22.66	22.71	22.73	1
		1	24	22.69	22.72	22.73	1
		12	0	21.67	21.71	21.70	2
		12	6	21.73	21.72	21.73	2
		12	13	21.75	21.78	21.68	2
		25	0	21.71	21.79	21.72	2
5M	64QAM	1	0	21.74	21.72	21.65	2
		1	12	21.72	21.69	21.68	2
		1	24	21.71	21.72	21.74	2
		12	0	20.75	20.71	20.67	3
		12	6	20.72	20.78	20.72	3
		12	13	20.76	20.78	20.71	3
		25	0	20.68	20.79	20.68	3

LTE Conducted Power (Full)

LTE Band 25

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	22.86	22.93	22.95	0
		1	50	22.78	22.88	22.80	0
		1	99	22.72	22.80	22.80	0
		50	0	21.84	21.82	21.90	1
		50	25	21.76	21.77	21.82	1
		50	50	21.71	21.70	21.82	1
		100	0	21.86	21.84	21.92	1
20M	16QAM	1	0	21.74	21.87	21.80	1
		1	50	21.71	21.87	21.80	1
		1	99	21.72	21.84	21.86	1
		50	0	20.74	20.79	20.85	2
		50	25	20.76	20.85	20.87	2
		50	50	20.76	20.84	20.87	2
		100	0	20.79	20.88	20.82	2
20M	64QAM	1	0	20.80	20.80	20.88	2
		1	50	20.76	20.81	20.88	2
		1	99	20.74	20.79	20.83	2
		50	0	19.71	19.79	19.90	3
		50	25	19.80	19.82	19.81	3
		50	50	19.73	19.88	19.85	3
		100	0	19.75	19.87	19.82	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	22.78	22.87	22.87	0
		1	37	22.75	22.78	22.84	0
		1	74	22.76	22.78	22.83	0
		36	0	21.78	21.71	21.77	1
		36	19	21.79	21.77	21.83	1
		36	39	21.78	21.77	21.81	1
		75	0	21.80	21.73	21.79	1
15M	16QAM	1	0	21.80	21.80	21.82	1
		1	37	21.79	21.79	21.85	1
		1	74	21.80	21.86	21.82	1
		36	0	20.74	20.81	20.89	2
		36	19	20.75	20.87	20.89	2
		36	39	20.72	20.87	20.81	2
		75	0	20.73	20.80	20.87	2
15M	64QAM	1	0	20.74	20.78	20.80	2
		1	37	20.79	20.82	20.81	2
		1	74	20.73	20.82	20.89	2
		36	0	19.78	19.83	19.88	3
		36	19	19.80	19.88	19.89	3
		36	39	19.76	19.78	19.82	3
		75	0	19.72	19.78	19.87	3

LTE Conducted Power (Full)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	22.79	22.82	22.81	0
		1	24	22.74	22.79	22.82	0
		1	49	22.80	22.81	22.83	0
		25	0	21.78	21.71	21.77	1
		25	12	21.79	21.77	21.83	1
		25	25	21.78	21.77	21.81	1
10M	16QAM	50	0	21.80	21.73	21.79	1
		1	0	21.74	21.86	21.84	1
		1	24	21.79	21.85	21.82	1
		1	49	21.74	21.82	21.84	1
		25	0	20.77	20.83	20.82	2
		25	12	20.79	20.86	20.83	2
10M	64QAM	25	25	20.79	20.86	20.88	2
		50	0	20.71	20.82	20.84	2
		1	0	20.78	20.85	20.81	2
		1	24	20.78	20.86	20.90	2
		1	49	20.72	20.87	20.87	2
		25	0	19.79	19.88	19.87	3
5M	QPSK	25	12	19.72	19.79	19.89	3
		25	25	19.79	19.81	19.84	3
		50	0	19.75	19.87	19.88	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	22.81	22.83	22.86	0
		1	12	22.74	22.78	22.88	0
		1	24	22.76	22.78	22.80	0
		12	0	21.78	21.71	21.77	1
		12	6	21.79	21.77	21.83	1
		12	13	21.78	21.77	21.81	1
5M	16QAM	25	0	21.80	21.73	21.79	1
		1	0	21.76	21.87	21.82	1
		1	12	21.76	21.79	21.85	1
		1	24	21.76	21.88	21.86	1
		12	0	20.78	20.85	20.83	2
		12	6	20.74	20.84	20.83	2
5M	64QAM	12	13	20.75	20.83	20.87	2
		25	0	20.75	20.82	20.84	2
		1	0	20.78	20.85	20.80	2
		1	12	20.78	20.79	20.85	2
		1	24	20.80	20.81	20.80	2
		12	0	19.71	19.84	19.85	3
5M	64QAM	12	6	19.78	19.84	19.80	3
		12	13	19.75	19.87	19.85	3
		25	0	19.75	19.87	19.84	3

LTE Conducted Power (Full)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	22.74	22.84	22.88	0
		1	7	22.75	22.84	22.90	0
		1	14	22.78	22.88	22.84	0
		8	0	21.78	21.71	21.77	1
		8	3	21.79	21.77	21.83	1
		8	7	21.78	21.77	21.81	1
		15	0	21.80	21.73	21.79	1
3M	16QAM	1	0	21.80	21.81	21.90	1
		1	7	21.74	21.80	21.84	1
		1	14	21.75	21.78	21.81	1
		8	0	20.73	20.86	20.86	2
		8	3	20.81	20.83	20.85	2
		8	7	20.79	20.85	20.82	2
		15	0	20.73	20.83	20.88	2
3M	64QAM	1	0	20.81	20.82	20.86	2
		1	7	20.76	20.82	20.85	2
		1	14	20.79	20.88	20.81	2
		8	0	19.80	19.78	19.80	3
		8	3	19.80	19.86	19.88	3
		8	7	19.73	19.85	19.87	3
		15	0	19.78	19.87	19.84	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	22.80	22.84	22.87	0
		1	2	22.75	22.84	22.85	0
		1	5	22.73	22.78	22.87	0
		3	0	22.78	22.81	22.84	0
		3	1	22.80	22.83	22.86	0
		3	3	22.72	22.87	22.88	0
		6	0	21.71	21.80	21.83	1
1.4M	16QAM	1	0	21.73	21.88	21.81	1
		1	2	21.74	21.86	21.83	1
		1	5	21.71	21.83	21.80	1
		3	0	21.73	21.82	21.87	1
		3	1	21.71	21.82	21.90	1
		3	3	21.76	21.86	21.90	1
		6	0	20.78	20.81	20.83	2
1.4M	64QAM	1	0	20.81	20.82	20.82	2
		1	2	20.76	20.81	20.86	2
		1	5	20.76	20.78	20.90	2
		3	0	20.73	20.84	20.82	2
		3	1	20.75	20.85	20.87	2
		3	3	20.72	20.88	20.80	2
		6	0	19.80	19.88	19.84	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	24.21	24.39	24.44	0
		1	37	24.15	24.26	24.36	0
		1	74	24.15	24.27	24.34	0
		36	0	23.26	23.44	23.49	1
		36	19	23.18	23.37	23.35	1
		36	39	23.14	23.38	23.39	1
		75	0	23.28	23.46	23.51	1
15M	16QAM	1	0	23.08	23.28	23.37	1
		1	37	23.11	23.27	23.30	1
		1	74	23.07	23.26	23.34	1
		36	0	22.13	22.32	22.32	2
		36	19	22.10	22.30	22.36	2
		36	39	22.13	22.27	22.34	2
		75	0	22.15	22.34	22.36	2
15M	64QAM	1	0	22.16	22.27	22.30	2
		1	37	22.15	22.27	22.31	2
		1	74	22.09	22.26	22.38	2
		36	0	21.13	21.26	21.30	3
		36	19	21.13	21.32	21.30	3
		36	39	21.12	21.31	21.38	3
		75	0	21.15	21.25	21.35	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	24.09	24.26	24.39	0
		1	24	24.09	24.25	24.35	0
		1	49	24.15	24.29	24.33	0
		25	0	23.14	23.31	23.44	1
		25	12	23.16	23.31	23.36	1
		25	25	23.20	23.34	23.38	1
		50	0	23.16	23.33	23.46	1
10M	16QAM	1	0	23.06	23.32	23.34	1
		1	24	23.11	23.29	23.32	1
		1	49	23.10	23.34	23.30	1
		25	0	22.08	22.26	22.34	2
		25	12	22.16	22.29	22.37	2
		25	25	22.06	22.25	22.37	2
		50	0	22.15	22.26	22.32	2
10M	64QAM	1	0	22.09	22.33	22.36	2
		1	24	22.07	22.28	22.36	2
		1	49	22.14	22.25	22.30	2
		25	0	21.12	21.31	21.30	3
		25	12	21.07	21.30	21.36	3
		25	25	21.16	21.24	21.36	3
		50	0	21.12	21.30	21.34	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	24.16	24.34	24.30	0
		1	12	24.07	24.34	24.36	0
		1	24	24.09	24.26	24.31	0
		12	0	23.21	23.39	23.35	1
		12	6	23.17	23.36	23.42	1
		12	13	23.21	23.34	23.41	1
		25	0	23.23	23.41	23.37	1
5M	16QAM	1	0	23.07	23.34	23.37	1
		1	12	23.14	23.31	23.37	1
		1	24	23.11	23.30	23.33	1
		12	0	22.16	22.25	22.37	2
		12	6	22.14	22.32	22.33	2
		12	13	22.14	22.31	22.33	2
		25	0	22.12	22.34	22.32	2
5M	64QAM	1	0	22.16	22.31	22.32	2
		1	12	22.08	22.30	22.30	2
		1	24	22.06	22.25	22.35	2
		12	0	21.08	21.32	21.34	3
		12	6	21.09	21.24	21.32	3
		12	13	21.08	21.26	21.39	3
		25	0	21.15	21.26	21.31	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	24.11	24.28	24.32	0
		1	7	24.12	24.26	24.39	0
		1	14	24.07	24.34	24.33	0
		8	0	23.16	23.33	23.37	1
		8	3	23.12	23.36	23.38	1
		8	7	23.12	23.30	23.44	1
		15	0	23.18	23.35	23.39	1
3M	16QAM	1	0	23.10	23.32	23.30	1
		1	7	23.09	23.26	23.35	1
		1	14	23.13	23.33	23.34	1
		8	0	22.12	22.24	22.33	2
		8	3	22.15	22.32	22.34	2
		8	7	22.12	22.32	22.37	2
		15	0	22.07	22.26	22.32	2
3M	64QAM	1	0	22.08	22.31	22.38	2
		1	7	22.14	22.25	22.39	2
		1	14	22.13	22.24	22.38	2
		8	0	21.14	21.25	21.31	3
		8	3	21.10	21.29	21.38	3
		8	7	21.12	21.27	21.31	3
		15	0	21.11	21.31	21.37	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	24.14	24.30	24.33	0
		1	2	24.09	24.25	24.36	0
		1	5	24.07	24.29	24.32	0
		3	0	24.11	24.31	24.37	0
		3	1	24.12	24.33	24.38	0
		3	3	24.14	24.27	24.35	0
		6	0	23.11	23.29	23.34	1
1.4M	16QAM	1	0	23.16	23.29	23.31	1
		1	2	23.12	23.26	23.36	1
		1	5	23.10	23.25	23.37	1
		3	0	23.06	23.27	23.31	1
		3	1	23.09	23.30	23.39	1
		3	3	23.16	23.29	23.31	1
		6	0	22.16	22.27	22.32	2
1.4M	64QAM	1	0	22.11	22.30	22.30	2
		1	2	22.06	22.29	22.30	2
		1	5	22.16	22.29	22.34	2
		3	0	22.13	22.31	22.35	2
		3	1	22.08	22.26	22.32	2
		3	3	22.12	22.24	22.34	2
		6	0	21.08	21.33	21.37	3

LTE Conducted Power (Full)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	22.84	22.76	22.92	0
		1	50	22.73	22.70	22.81	0
		1	99	22.78	22.66	22.87	0
		50	0	21.89	21.81	21.97	1
		50	25	21.78	21.73	21.91	1
		50	50	21.82	21.75	21.85	1
		100	0	21.91	21.83	21.99	1
20M	16QAM	1	0	21.70	21.71	21.79	1
		1	50	21.78	21.66	21.84	1
		1	99	21.69	21.70	21.84	1
		50	0	20.71	20.62	20.78	2
		50	25	20.69	20.68	20.78	2
		50	50	20.76	20.68	20.87	2
		100	0	20.77	20.67	20.79	2
20M	64QAM	1	0	20.77	20.71	20.84	2
		1	50	20.72	20.69	20.87	2
		1	99	20.78	20.68	20.82	2
		50	0	19.71	19.70	19.86	3
		50	25	19.78	19.64	19.83	3
		50	50	19.77	19.63	19.80	3
		100	0	19.77	19.68	19.80	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	22.71	22.64	22.78	0
		1	37	22.70	22.66	22.79	0
		1	74	22.76	22.65	22.82	0
		36	0	21.76	21.69	21.83	1
		36	19	21.79	21.76	21.89	1
		36	39	21.78	21.69	21.92	1
		75	0	21.78	21.71	21.85	1
15M	16QAM	1	0	21.78	21.64	21.85	1
		1	37	21.73	21.65	21.87	1
		1	74	21.77	21.65	21.83	1
		36	0	20.77	20.67	20.86	2
		36	19	20.69	20.63	20.81	2
		36	39	20.78	20.71	20.78	2
		75	0	20.69	20.69	20.78	2
15M	64QAM	1	0	20.78	20.62	20.83	2
		1	37	20.77	20.62	20.78	2
		1	74	20.76	20.71	20.79	2
		36	0	19.69	19.64	19.82	3
		36	19	19.75	19.71	19.87	3
		36	39	19.78	19.71	19.81	3
		75	0	19.77	19.69	19.78	3

LTE Conducted Power (Full)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	22.78	22.62	22.82	0
		1	24	22.76	22.66	22.81	0
		1	49	22.73	22.70	22.86	0
		25	0	21.83	21.67	21.87	1
		25	12	21.76	21.67	21.90	1
		25	25	21.74	21.70	21.92	1
10M	16QAM	50	0	21.85	21.69	21.89	1
		1	0	21.70	21.66	21.85	1
		1	24	21.70	21.70	21.79	1
		1	49	21.76	21.64	21.79	1
		25	0	20.72	20.64	20.79	2
		25	12	20.71	20.65	20.82	2
10M	64QAM	25	25	20.72	20.64	20.84	2
		50	0	20.72	20.69	20.82	2
		1	0	20.75	20.69	20.86	2
		1	24	20.78	20.62	20.85	2
		1	49	20.72	20.65	20.81	2
		25	0	19.69	19.68	19.80	3
5M	QPSK	25	12	19.72	19.64	19.82	3
		25	25	19.73	19.65	19.84	3
		50	0	19.70	19.71	19.83	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	22.70	22.68	22.87	0
		1	12	22.78	22.63	22.78	0
		1	24	22.74	22.66	22.81	0
		12	0	21.75	21.73	21.92	1
		12	6	21.76	21.76	21.89	1
		12	13	21.81	21.70	21.85	1
5M	16QAM	25	0	21.77	21.75	21.94	1
		1	0	21.70	21.66	21.80	1
		1	12	21.77	21.70	21.82	1
		1	24	21.72	21.64	21.80	1
		12	0	20.70	20.71	20.82	2
		12	6	20.72	20.64	20.85	2
5M	64QAM	12	13	20.73	20.71	20.84	2
		25	0	20.78	20.62	20.79	2
		1	0	20.69	20.64	20.79	2
		1	12	20.69	20.66	20.84	2
		1	24	20.72	20.69	20.85	2
		12	0	19.76	19.63	19.79	3
5M	QPSK	12	6	19.72	19.67	19.83	3
		12	13	19.76	19.63	19.78	3
		25	0	19.77	19.66	19.87	3
		25	0	19.77	19.66	19.87	3

LTE Conducted Power (Full)								
LTE Band 41								
BW	MCS Index	RB Size	RB Offset	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		40185	40620	41055	41490	
		Frequency (MHz)		2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.02	22.83	23.06	23.07	0
		1	50	22.91	22.69	22.94	23.02	0
		1	99	22.88	22.74	22.91	22.95	0
		50	0	22.07	21.88	22.11	22.12	1
		50	25	21.95	21.80	21.99	22.04	1
		50	50	21.98	21.77	22.01	22.01	1
		100	0	22.09	21.90	22.13	22.14	1
20M	16QAM	1	0	21.89	21.68	22.01	21.94	1
		1	50	21.91	21.77	21.99	21.97	1
		1	99	21.87	21.69	21.95	21.93	1
		50	0	20.87	20.75	20.99	21.00	2
		50	25	20.87	20.74	20.91	20.94	2
		50	50	20.90	20.75	20.99	20.96	2
		100	0	20.90	20.70	20.92	20.95	2
20M	64QAM	1	0	20.96	20.73	20.91	20.96	2
		1	50	20.93	20.69	20.94	20.94	2
		1	99	20.97	20.77	20.99	20.94	2
		50	0	19.89	19.77	19.97	19.96	3
		50	25	19.91	19.69	19.98	19.98	3
		50	50	19.96	19.70	19.95	19.93	3
		100	0	19.90	19.69	19.91	19.93	3
BW	MCS Index	Channel		40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	22.87	22.75	22.97	23.00	0
		1	37	22.90	22.75	23.01	22.99	0
		1	74	22.96	22.71	22.95	23.00	0
		36	0	21.92	21.80	22.02	22.05	1
		36	19	21.95	21.81	22.02	22.05	1
		36	39	21.98	21.73	21.98	22.03	1
		75	0	21.94	21.82	22.04	22.07	1
15M	16QAM	1	0	21.90	21.70	22.00	21.99	1
		1	37	21.92	21.71	21.98	21.98	1
		1	74	21.94	21.71	21.98	21.99	1
		36	0	20.96	20.73	20.98	20.98	2
		36	19	20.93	20.75	20.99	21.00	2
		36	39	20.94	20.72	21.00	20.99	2
		75	0	20.89	20.77	20.91	20.94	2
15M	64QAM	1	0	20.95	20.75	20.95	20.99	2
		1	37	20.88	20.76	20.96	21.01	2
		1	74	20.90	20.72	20.91	21.01	2
		36	0	19.92	19.69	19.97	19.98	3
		36	19	19.88	19.75	20.01	19.92	3
		36	39	19.95	19.68	19.99	20.01	3
		75	0	19.89	19.76	19.95	19.96	3

LTE Conducted Power (Full)								
LTE Band 41								
BW	MCS Index	Channel		40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2547	2593	2639	2685	
10M	QPSK	1	0	22.97	22.75	22.97	23.00	0
		1	24	22.96	22.76	22.96	23.02	0
		1	49	22.88	22.77	22.99	22.95	0
		25	0	22.02	21.80	22.02	22.05	1
		25	12	21.94	21.78	22.04	21.98	1
		25	25	21.99	21.77	22.06	22.07	1
10M	16QAM	50	0	22.04	21.82	22.04	22.07	1
		1	0	21.94	21.75	21.97	22.02	1
		1	24	21.95	21.71	21.96	21.95	1
		1	49	21.87	21.73	21.99	22.01	1
		25	0	20.96	20.75	20.92	20.96	2
		25	12	20.96	20.71	20.95	21.00	2
10M	64QAM	25	25	20.88	20.73	20.91	20.96	2
		50	0	20.91	20.71	20.98	20.98	2
		1	0	20.95	20.71	20.93	21.00	2
		1	24	20.95	20.76	20.98	20.94	2
		1	49	20.90	20.69	20.96	20.94	2
		25	0	19.95	19.68	20.01	19.98	3
5M	QPSK	25	12	19.96	19.76	20.01	20.02	3
		25	25	19.87	19.72	19.99	20.02	3
		50	0	19.93	19.73	19.93	20.02	3
		1	0	22.91	22.70	22.95	22.93	0
		1	12	22.94	22.76	22.96	22.95	0
		1	24	22.94	22.68	23.00	22.96	0
5M	16QAM	12	0	21.96	21.75	22.00	21.98	1
		12	6	22.00	21.81	21.96	22.04	1
		12	13	21.99	21.81	22.03	21.99	1
		25	0	21.98	21.77	22.02	22.00	1
		1	0	21.95	21.76	21.91	21.94	1
		1	12	21.91	21.77	21.92	22.01	1
5M	64QAM	1	24	21.93	21.71	21.99	21.92	1
		12	0	20.89	20.70	20.97	20.99	2
		12	6	20.89	20.73	21.00	20.98	2
		12	13	20.90	20.72	20.99	20.99	2
		25	0	20.93	20.76	20.98	21.01	2
		1	0	20.88	20.73	21.01	20.98	2
5M	QPSK	1	12	20.97	20.75	21.01	20.96	2
		1	24	20.89	20.76	20.98	21.00	2
		12	0	19.96	19.74	20.00	20.00	3
		12	6	19.88	19.68	19.96	19.99	3
		12	13	19.93	19.71	19.95	20.02	3
		25	0	19.90	19.71	19.92	19.96	3

LTE Conducted Power (Full)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	21.96	21.37	21.41	21.89	0
		1	50	21.85	21.27	21.26	21.78	0
		1	99	21.88	21.32	21.31	21.80	0
		50	0	20.91	20.32	20.36	20.84	1
		50	25	20.77	20.19	20.23	20.72	1
		50	50	20.78	20.26	20.27	20.75	1
		100	0	20.93	20.34	20.38	20.86	1
20M	16QAM	1	0	20.81	20.25	20.34	20.79	1
		1	50	20.84	20.28	20.35	20.77	1
		1	99	20.85	20.23	20.28	20.77	1
		50	0	19.90	19.26	19.32	19.75	2
		50	25	19.81	19.29	19.34	19.80	2
		50	50	19.82	19.31	19.28	19.82	2
		100	0	19.87	19.29	19.32	19.78	2
20M	64QAM	1	0	19.88	19.27	19.33	19.76	2
		1	50	19.91	19.23	19.28	19.81	2
		1	99	19.84	19.29	19.30	19.78	2
		50	0	18.85	18.23	18.29	18.84	3
		50	25	18.83	18.28	18.31	18.82	3
		50	50	18.88	18.24	18.29	18.75	3
		100	0	18.86	18.31	18.26	18.81	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	21.83	21.31	21.27	21.74	0
		1	37	21.89	21.30	21.35	21.84	0
		1	74	21.90	21.29	21.31	21.83	0
		36	0	20.78	20.26	20.22	20.69	1
		36	19	20.86	20.27	20.21	20.76	1
		36	39	20.81	20.25	20.26	20.71	1
		75	0	20.80	20.28	20.24	20.71	1
15M	16QAM	1	0	20.81	20.24	20.30	20.74	1
		1	37	20.91	20.31	20.30	20.75	1
		1	74	20.85	20.28	20.31	20.83	1
		36	0	19.84	19.27	19.26	19.82	2
		36	19	19.85	19.29	19.27	19.80	2
		36	39	19.86	19.27	19.27	19.76	2
		75	0	19.88	19.26	19.28	19.76	2
15M	64QAM	1	0	19.88	19.24	19.34	19.83	2
		1	37	19.85	19.29	19.29	19.74	2
		1	74	19.88	19.27	19.29	19.79	2
		36	0	18.85	18.30	18.26	18.82	3
		36	19	18.91	18.23	18.29	18.82	3
		36	39	18.89	18.23	18.30	18.80	3
		75	0	18.81	18.30	18.33	18.75	3

LTE Conducted Power (Full)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	21.88	21.32	21.30	21.78	0
		1	24	21.88	21.30	21.35	21.79	0
		1	49	21.88	21.32	21.32	21.79	0
		25	0	20.83	20.27	20.25	20.73	1
		25	12	20.86	20.22	20.28	20.71	1
		25	25	20.79	20.24	20.28	20.75	1
10M	16QAM	50	0	20.85	20.29	20.27	20.75	1
		1	0	20.90	20.32	20.28	20.75	1
		1	24	20.82	20.28	20.36	20.80	1
		1	49	20.85	20.31	20.33	20.76	1
		25	0	19.81	19.23	19.30	19.75	2
		25	12	19.86	19.32	19.35	19.83	2
10M	64QAM	25	25	19.84	19.31	19.29	19.83	2
		50	0	19.88	19.30	19.33	19.82	2
		1	0	19.88	19.28	19.31	19.76	2
		1	24	19.89	19.32	19.34	19.82	2
		1	49	19.88	19.27	19.30	19.82	2
		25	0	18.81	18.32	18.29	18.81	3
5M	QPSK	25	12	18.91	18.28	18.34	18.84	3
		25	25	18.91	18.24	18.26	18.75	3
		50	0	18.83	18.24	18.34	18.83	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	21.87	21.24	21.31	21.77	0
		1	12	21.82	21.28	21.33	21.76	0
		1	24	21.86	21.23	21.36	21.80	0
		12	0	20.82	20.19	20.26	20.72	1
		12	6	20.84	20.21	20.30	20.79	1
		12	13	20.86	20.26	20.21	20.73	1
5M	16QAM	25	0	20.84	20.21	20.28	20.74	1
		1	0	20.82	20.29	20.35	20.79	1
		1	12	20.88	20.32	20.30	20.76	1
		1	24	20.85	20.31	20.29	20.77	1
		12	0	19.91	19.30	19.30	19.76	2
		12	6	19.89	19.30	19.35	19.75	2
5M	64QAM	12	13	19.89	19.27	19.36	19.81	2
		25	0	19.91	19.27	19.28	19.76	2
		1	0	19.83	19.29	19.32	19.83	2
		1	12	19.89	19.32	19.27	19.76	2
		1	24	19.82	19.23	19.33	19.82	2
		12	0	18.82	18.25	18.27	18.83	3
5M	64QAM	12	6	18.83	18.31	18.28	18.81	3
		12	13	18.91	18.28	18.30	18.78	3
		25	0	18.84	18.31	18.32	18.82	3
		25	0	18.84	18.31	18.32	18.82	3

LTE Conducted Power (Full)

LTE Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.17	23.34	23.13	0
		1	50	23.04	23.29	23.07	0
		1	99	23.09	23.24	23.00	0
		50	0	22.22	22.39	22.18	1
		50	25	22.11	22.24	22.09	1
		50	50	22.08	22.33	22.06	1
		100	0	22.24	22.41	22.20	1
20M	16QAM	1	0	22.03	22.23	22.05	1
		1	50	22.10	22.29	22.06	1
		1	99	22.10	22.26	22.01	1
		50	0	21.12	21.21	21.08	2
		50	25	21.08	21.19	21.08	2
		50	50	21.03	21.20	20.99	2
		100	0	21.03	21.22	21.05	2
20M	64QAM	1	0	21.10	21.28	21.01	2
		1	50	21.10	21.26	20.98	2
		1	99	21.09	21.22	21.05	2
		50	0	20.12	20.22	20.02	3
		50	25	20.03	20.28	20.03	3
		50	50	20.08	20.20	19.98	3
		100	0	20.07	20.26	20.00	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.09	23.19	22.99	0
		1	37	23.12	23.29	23.06	0
		1	74	23.08	23.20	22.99	0
		36	0	22.14	22.24	22.04	1
		36	19	22.09	22.31	22.10	1
		36	39	22.10	22.25	22.11	1
		75	0	22.16	22.26	22.06	1
15M	16QAM	1	0	22.05	22.28	22.05	1
		1	37	22.11	22.25	22.04	1
		1	74	22.07	22.25	22.02	1
		36	0	21.12	21.19	21.02	2
		36	19	21.10	21.26	21.06	2
		36	39	21.04	21.21	21.04	2
		75	0	21.03	21.23	21.04	2
15M	64QAM	1	0	21.05	21.22	21.05	2
		1	37	21.10	21.29	21.01	2
		1	74	21.03	21.22	21.06	2
		36	0	20.06	20.27	20.06	3
		36	19	20.06	20.27	20.00	3
		36	39	20.10	20.24	20.07	3
		75	0	20.07	20.24	20.06	3

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.04	23.29	23.03	0
		1	24	23.06	23.19	23.08	0
		1	49	23.12	23.20	23.01	0
		25	0	22.09	22.34	22.08	1
		25	12	22.09	22.30	22.09	1
		25	25	22.09	22.27	22.08	1
10M	16QAM	50	0	22.11	22.36	22.10	1
		1	0	22.09	22.29	22.07	1
		1	24	22.07	22.24	22.05	1
		1	49	22.12	22.23	22.08	1
		25	0	21.07	21.22	21.07	2
		25	12	21.06	21.19	21.04	2
10M	64QAM	25	25	21.11	21.27	21.01	2
		50	0	21.08	21.19	21.07	2
		1	0	21.10	21.21	21.06	2
		1	24	21.11	21.26	20.98	2
		1	49	21.11	21.25	21.00	2
		25	0	20.09	20.21	20.04	3
5M	QPSK	25	12	20.11	20.28	19.99	3
		25	25	20.07	20.21	20.08	3
		50	0	20.05	20.28	19.99	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.08	23.22	23.08	0
		1	12	23.04	23.23	23.02	0
		1	24	23.05	23.19	23.07	0
		12	0	22.13	22.27	22.13	1
		12	6	22.11	22.30	22.05	1
		12	13	22.13	22.27	22.03	1
5M	16QAM	25	0	22.15	22.29	22.15	1
		1	0	22.11	22.21	22.08	1
		1	12	22.08	22.24	22.08	1
		1	24	22.11	22.20	22.05	1
		12	0	21.11	21.29	21.06	2
		12	6	21.12	21.25	21.01	2
5M	64QAM	12	13	21.04	21.24	21.03	2
		25	0	21.04	21.27	21.02	2
		1	0	21.04	21.23	21.05	2
		1	12	21.07	21.23	21.04	2
		1	24	21.12	21.22	21.07	2
		12	0	20.03	20.21	19.98	3
5M	64QAM	12	6	20.11	20.28	19.98	3
		12	13	20.08	20.27	20.05	3
		25	0	20.06	20.27	20.07	3

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	23.03	23.29	23.06	0
		1	7	23.10	23.29	23.06	0
		1	14	23.11	23.19	22.99	0
		8	0	22.08	22.34	22.11	1
		8	3	22.15	22.27	22.04	1
		8	7	22.16	22.32	22.09	1
		15	0	22.10	22.36	22.13	1
3M	16QAM	1	0	22.04	22.28	22.01	1
		1	7	22.09	22.19	22.08	1
		1	14	22.11	22.21	22.00	1
		8	0	21.09	21.19	20.98	2
		8	3	21.10	21.21	21.07	2
		8	7	21.04	21.23	21.01	2
		15	0	21.09	21.23	21.00	2
3M	64QAM	1	0	21.12	21.28	21.05	2
		1	7	21.07	21.28	21.07	2
		1	14	21.11	21.29	20.99	2
		8	0	20.07	20.27	20.03	3
		8	3	20.03	20.28	20.00	3
		8	7	20.04	20.23	20.07	3
		15	0	20.05	20.20	20.02	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.08	23.29	23.00	0
		1	2	23.04	23.26	22.99	0
		1	5	23.12	23.24	23.08	0
		3	0	23.06	23.27	23.00	0
		3	1	23.05	23.26	23.02	0
		3	3	23.12	23.25	23.08	0
		6	0	22.03	22.21	22.06	1
1.4M	16QAM	1	0	22.11	22.20	21.98	1
		1	2	22.08	22.21	22.05	1
		1	5	22.09	22.28	22.08	1
		3	0	22.05	22.28	22.06	1
		3	1	22.11	22.22	22.07	1
		3	3	22.06	22.19	22.01	1
		6	0	21.11	21.28	21.07	2
1.4M	64QAM	1	0	21.03	21.29	21.04	2
		1	2	21.05	21.28	21.07	2
		1	5	21.03	21.26	21.00	2
		3	0	21.05	21.25	21.08	2
		3	1	21.04	21.25	21.04	2
		3	3	21.08	21.25	20.99	2
		6	0	20.11	20.19	20.05	3

LTE Conducted Power (Full)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	24.15	24.19	24.14	0
		1	50	24.03	24.10	24.06	0
		1	99	24.06	24.05	24.04	0
		50	0	23.20	23.24	23.19	1
		50	25	23.07	23.12	23.09	1
		50	50	23.07	23.13	23.09	1
		100	0	23.22	23.26	23.21	1
20M	16QAM	1	0	23.02	23.10	23.03	1
		1	50	23.04	23.14	23.07	1
		1	99	23.02	23.11	23.01	1
		50	0	22.06	22.08	22.05	2
		50	25	22.01	22.11	22.09	2
		50	50	22.04	22.12	22.02	2
		100	0	22.07	22.10	22.09	2
20M	64QAM	1	0	22.08	22.06	22.04	2
		1	50	22.06	22.08	21.99	2
		1	99	22.02	22.08	22.02	2
		50	0	21.08	21.12	21.02	3
		50	25	21.00	21.05	21.04	3
		50	50	21.05	21.06	21.01	3
		100	0	21.01	21.10	21.04	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	24.04	24.07	24.02	0
		1	37	24.06	24.07	24.07	0
		1	74	24.00	24.11	24.09	0
		36	0	23.09	23.12	23.07	1
		36	19	23.05	23.13	23.07	1
		36	39	23.06	23.15	23.10	1
		75	0	23.11	23.14	23.09	1
15M	16QAM	1	0	23.03	23.06	23.07	1
		1	37	23.10	23.12	23.06	1
		1	74	23.04	23.07	23.03	1
		36	0	22.00	22.06	22.07	2
		36	19	22.05	22.09	22.04	2
		36	39	22.08	22.12	22.03	2
		75	0	22.06	22.13	22.09	2
15M	64QAM	1	0	22.01	22.13	22.00	2
		1	37	22.01	22.10	22.03	2
		1	74	22.00	22.06	22.08	2
		36	0	21.01	21.05	21.08	3
		36	19	21.04	21.10	21.09	3
		36	39	21.02	21.14	21.04	3
		75	0	21.04	21.14	21.08	3

LTE Conducted Power (Full)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	24.06	24.07	24.05	0
		1	24	24.00	24.13	23.99	0
		1	49	24.10	24.06	23.99	0
		25	0	23.11	23.12	23.10	1
		25	12	23.06	23.18	23.06	1
		25	25	23.11	23.13	23.06	1
10M	16QAM	50	0	23.13	23.14	23.12	1
		1	0	23.00	23.05	23.09	1
		1	24	23.00	23.06	23.03	1
		1	49	23.03	23.08	23.09	1
		25	0	22.00	22.07	22.08	2
		25	12	22.02	22.06	22.07	2
10M	64QAM	25	25	22.01	22.05	22.05	2
		50	0	22.05	22.07	22.04	2
		1	0	22.03	22.08	22.05	2
		1	24	22.01	22.07	22.01	2
		1	49	22.01	22.07	22.01	2
		25	0	21.10	21.09	21.01	3
5M	QPSK	25	12	21.04	21.11	20.99	3
		25	25	21.05	21.05	21.06	3
		50	0	21.02	21.11	21.05	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	24.00	24.13	24.03	0
		1	12	24.00	24.12	24.07	0
		1	24	24.05	24.09	24.08	0
		12	0	23.05	23.18	23.08	1
		12	6	23.10	23.10	23.09	1
		12	13	23.12	23.11	23.12	1
5M	16QAM	25	0	23.07	23.20	23.10	1
		1	0	23.10	23.10	23.09	1
		1	12	23.00	23.13	23.04	1
		1	24	23.04	23.08	23.07	1
		12	0	22.03	22.09	22.07	2
		12	6	22.10	22.05	22.00	2
5M	64QAM	12	13	22.08	22.11	22.01	2
		25	0	22.04	22.08	22.09	2
		1	0	22.04	22.09	22.08	2
		1	12	22.07	22.09	22.03	2
		1	24	22.09	22.08	22.02	2
		12	0	21.09	21.09	21.02	3
5M	64QAM	12	6	21.10	21.14	20.99	3
		12	13	21.02	21.13	21.02	3
		25	0	21.05	21.06	21.00	3
		25	0	21.05	21.06	21.00	3

WCDMA Conducted Power (Reduction)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	19.62	19.68	19.92	19.97	20.06	20.23	19.21	19.11	19.04
HSDPA Subtest-1	19.51	19.57	19.84	19.89	19.99	20.18	19.14	19.05	18.94
HSDPA Subtest-2	19.57	19.59	19.78	19.85	19.99	20.11	19.07	19.02	18.98
HSDPA Subtest-3	18.99	19.08	19.35	19.37	19.43	19.65	18.57	18.54	18.48
HSDPA Subtest-4	19.05	19.03	19.29	19.35	19.48	19.61	18.60	18.49	18.45
DC-HSDPA Subtest-1	19.55	19.57	19.87	19.83	20.00	20.14	19.11	18.98	18.94
DC-HSDPA Subtest-2	19.48	19.60	19.82	19.89	19.98	20.16	19.09	18.97	18.90
DC-HSDPA Subtest-3	19.03	19.11	19.35	19.38	19.47	19.67	18.64	18.49	18.47
DC-HSDPA Subtest-4	19.01	19.06	19.28	19.41	19.45	19.66	18.64	18.46	18.40
HSUPA Subtest-1	19.56	19.56	19.86	19.91	19.92	20.16	19.11	18.98	18.96
HSUPA Subtest-2	17.52	17.63	17.82	17.90	17.95	18.12	17.13	17.05	16.98
HSUPA Subtest-3	18.48	18.56	18.85	18.89	18.98	19.10	18.11	18.00	17.92
HSUPA Subtest-4	17.54	17.57	17.86	17.89	17.91	18.09	17.12	17.04	16.93
HSUPA Subtest-5	19.53	19.53	19.82	19.83	19.93	20.17	19.13	18.96	18.91

LTE Conducted Power (Reduction)

LTE Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	20.45	20.46	20.48	0
		1	50	20.39	20.39	20.34	0
		1	99	20.34	20.32	20.35	0
		50	0	19.40	19.41	19.43	1
		50	25	19.28	19.30	19.34	1
		50	50	19.34	19.27	19.35	1
		100	0	19.42	19.43	19.45	1
20M	16QAM	1	0	19.38	19.41	19.37	1
		1	50	19.33	19.32	19.39	1
		1	99	19.33	19.38	19.36	1
		50	0	18.37	18.40	18.39	2
		50	25	18.35	18.38	18.42	2
		50	50	18.36	18.38	18.43	2
		100	0	18.30	18.41	18.36	2
20M	64QAM	1	0	18.38	18.38	18.35	2
		1	50	18.33	18.36	18.38	2
		1	99	18.39	18.33	18.42	2
		50	0	17.39	17.38	17.34	3
		50	25	17.31	17.41	17.37	3
		50	50	17.37	17.40	17.36	3
		100	0	17.33	17.38	17.41	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	20.35	20.33	20.41	0
		1	37	20.30	20.33	20.42	0
		1	74	20.31	20.40	20.34	0
		36	0	19.30	19.28	19.36	1
		36	19	19.28	19.27	19.30	1
		36	39	19.29	19.30	19.37	1
		75	0	19.32	19.30	19.38	1
15M	16QAM	1	0	19.37	19.37	19.41	1
		1	37	19.36	19.41	19.42	1
		1	74	19.38	19.34	19.34	1
		36	0	18.39	18.32	18.34	2
		36	19	18.34	18.39	18.34	2
		36	39	18.30	18.33	18.41	2
		75	0	18.31	18.41	18.34	2
15M	64QAM	1	0	18.30	18.37	18.36	2
		1	37	18.30	18.32	18.35	2
		1	74	18.31	18.35	18.38	2
		36	0	17.36	17.32	17.42	3
		36	19	17.32	17.41	17.36	3
		36	39	17.31	17.34	17.36	3
		75	0	17.32	17.32	17.40	3

LTE Conducted Power (Reduction)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	20.33	20.36	20.41	0
		1	24	20.33	20.40	20.40	0
		1	49	20.31	20.39	20.36	0
		25	0	19.28	19.31	19.36	1
		25	12	19.33	19.31	19.36	1
		25	25	19.27	19.35	19.32	1
		50	0	19.30	19.33	19.38	1
10M	16QAM	1	0	19.36	19.32	19.41	1
		1	24	19.33	19.32	19.41	1
		1	49	19.36	19.34	19.36	1
		25	0	18.33	18.35	18.35	2
		25	12	18.31	18.38	18.43	2
		25	25	18.33	18.39	18.35	2
		50	0	18.34	18.33	18.34	2
10M	64QAM	1	0	18.32	18.35	18.35	2
		1	24	18.31	18.38	18.43	2
		1	49	18.31	18.37	18.34	2
		25	0	17.30	17.40	17.37	3
		25	12	17.31	17.41	17.36	3
		25	25	17.31	17.41	17.42	3
		50	0	17.32	17.32	17.39	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	20.35	20.37	20.36	0
		1	12	20.30	20.38	20.37	0
		1	24	20.34	20.39	20.37	0
		12	0	19.30	19.32	19.31	1
		12	6	19.29	19.30	19.34	1
		12	13	19.29	19.28	19.36	1
		25	0	19.32	19.34	19.33	1
5M	16QAM	1	0	19.38	19.34	19.40	1
		1	12	19.31	19.34	19.38	1
		1	24	19.37	19.41	19.39	1
		12	0	18.39	18.37	18.38	2
		12	6	18.31	18.40	18.39	2
		12	13	18.38	18.33	18.39	2
		25	0	18.30	18.40	18.39	2
5M	64QAM	1	0	18.35	18.39	18.41	2
		1	12	18.38	18.39	18.37	2
		1	24	18.37	18.40	18.37	2
		12	0	17.35	17.39	17.36	3
		12	6	17.34	17.34	17.40	3
		12	13	17.38	17.34	17.41	3
		25	0	17.32	17.36	17.40	3

LTE Conducted Power (Reduction)

LTE Band 2

BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	20.36	20.38	20.42	0
		1	7	20.35	20.35	20.36	0
		1	14	20.37	20.33	20.34	0
		8	0	19.31	19.33	19.37	1
		8	3	19.32	19.32	19.28	1
		8	7	19.27	19.34	19.33	1
		15	0	19.33	19.35	19.39	1
3M	16QAM	1	0	19.35	19.38	19.34	1
		1	7	19.36	19.41	19.40	1
		1	14	19.36	19.40	19.38	1
		8	0	18.35	18.41	18.35	2
		8	3	18.30	18.40	18.43	2
		8	7	18.36	18.32	18.41	2
		15	0	18.34	18.37	18.37	2
3M	64QAM	1	0	18.30	18.32	18.37	2
		1	7	18.39	18.36	18.39	2
		1	14	18.38	18.41	18.39	2
		8	0	17.39	17.40	17.34	3
		8	3	17.37	17.38	17.34	3
		8	7	17.30	17.32	17.43	3
		15	0	17.32	17.33	17.36	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	20.35	20.36	20.40	0
		1	2	20.39	20.37	20.42	0
		1	5	20.36	20.36	20.41	0
		3	0	20.32	20.35	20.40	0
		3	1	20.37	20.35	20.43	0
		3	3	20.30	20.33	20.40	0
		6	0	19.38	19.36	19.40	1
1.4M	16QAM	1	0	19.32	19.38	19.34	1
		1	2	19.31	19.38	19.42	1
		1	5	19.30	19.41	19.43	1
		3	0	19.36	19.38	19.38	1
		3	1	19.37	19.39	19.42	1
		3	3	19.35	19.39	19.35	1
		6	0	18.30	18.35	18.36	2
1.4M	64QAM	1	0	18.37	18.39	18.40	2
		1	2	18.33	18.35	18.36	2
		1	5	18.33	18.38	18.41	2
		3	0	18.31	18.36	18.40	2
		3	1	18.33	18.37	18.42	2
		3	3	18.33	18.39	18.39	2
		6	0	17.32	17.36	17.36	3

LTE Conducted Power (Reduction)

LTE Band 4

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	20.71	20.83	20.72	0
		1	50	20.64	20.74	20.60	0
		1	99	20.61	20.75	20.58	0
		50	0	19.66	19.78	19.67	1
		50	25	19.57	19.68	19.52	1
		50	50	19.61	19.69	19.59	1
		100	0	19.68	19.80	19.69	1
20M	16QAM	1	0	19.60	19.76	19.59	1
		1	50	19.57	19.70	19.57	1
		1	99	19.59	19.71	19.66	1
		50	0	18.63	18.71	18.62	2
		50	25	18.62	18.69	18.61	2
		50	50	18.57	18.74	18.65	2
		100	0	18.64	18.71	18.59	2
20M	64QAM	1	0	18.61	18.76	18.67	2
		1	50	18.59	18.70	18.58	2
		1	99	18.57	18.73	18.61	2
		50	0	17.59	17.71	17.59	3
		50	25	17.62	17.76	17.60	3
		50	50	17.60	17.70	17.62	3
		100	0	17.58	17.70	17.59	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	20.58	20.68	20.62	0
		1	37	20.62	20.74	20.61	0
		1	74	20.63	20.72	20.61	0
		36	0	19.53	19.63	19.57	1
		36	19	19.56	19.71	19.55	1
		36	39	19.53	19.65	19.56	1
		75	0	19.55	19.65	19.59	1
15M	16QAM	1	0	19.66	19.68	19.66	1
		1	37	19.63	19.71	19.65	1
		1	74	19.63	19.68	19.64	1
		36	0	18.56	18.73	18.58	2
		36	19	18.58	18.72	18.62	2
		36	39	18.65	18.74	18.63	2
		75	0	18.58	18.69	18.65	2
15M	64QAM	1	0	18.57	18.68	18.65	2
		1	37	18.58	18.69	18.67	2
		1	74	18.62	18.72	18.62	2
		36	0	17.58	17.68	17.66	3
		36	19	17.58	17.77	17.60	3
		36	39	17.59	17.70	17.61	3
		75	0	17.64	17.70	17.67	3

LTE Conducted Power (Reduction)

LTE Band 4

BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	20.60	20.77	20.57	0
		1	24	20.59	20.76	20.59	0
		1	49	20.61	20.75	20.63	0
		25	0	19.55	19.72	19.52	1
		25	12	19.61	19.69	19.57	1
		25	25	19.58	19.70	19.61	1
		50	0	19.57	19.74	19.54	1
10M	16QAM	1	0	19.56	19.75	19.65	1
		1	24	19.56	19.74	19.57	1
		1	49	19.61	19.72	19.67	1
		25	0	18.57	18.70	18.61	2
		25	12	18.62	18.69	18.60	2
		25	25	18.64	18.70	18.65	2
		50	0	18.65	18.73	18.58	2
10M	64QAM	1	0	18.65	18.69	18.57	2
		1	24	18.65	18.69	18.65	2
		1	49	18.57	18.73	18.63	2
		25	0	17.66	17.75	17.61	3
		25	12	17.56	17.68	17.59	3
		25	25	17.59	17.77	17.65	3
		50	0	17.64	17.72	17.57	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	20.64	20.76	20.59	0
		1	12	20.61	20.73	20.57	0
		1	24	20.61	20.72	20.65	0
		12	0	19.59	19.71	19.54	1
		12	6	19.59	19.63	19.57	1
		12	13	19.59	19.70	19.59	1
		25	0	19.61	19.73	19.56	1
5M	16QAM	1	0	19.60	19.71	19.60	1
		1	12	19.64	19.69	19.57	1
		1	24	19.60	19.69	19.63	1
		12	0	18.62	18.77	18.59	2
		12	6	18.61	18.75	18.61	2
		12	13	18.57	18.70	18.65	2
		25	0	18.56	18.76	18.57	2
5M	64QAM	1	0	18.66	18.74	18.66	2
		1	12	18.65	18.75	18.64	2
		1	24	18.57	18.68	18.60	2
		12	0	17.66	17.76	17.64	3
		12	6	17.63	17.69	17.58	3
		12	13	17.64	17.75	17.57	3
		25	0	17.60	17.75	17.59	3

LTE Conducted Power (Reduction)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	20.66	20.73	20.60	0
		1	7	20.63	20.68	20.59	0
		1	14	20.63	20.73	20.64	0
		8	0	19.61	19.68	19.55	1
		8	3	19.57	19.68	19.58	1
		8	7	19.52	19.68	19.59	1
		15	0	19.63	19.70	19.57	1
3M	16QAM	1	0	19.66	19.75	19.60	1
		1	7	19.58	19.69	19.66	1
		1	14	19.62	19.76	19.62	1
		8	0	18.61	18.68	18.61	2
		8	3	18.57	18.69	18.62	2
		8	7	18.61	18.74	18.59	2
		15	0	18.66	18.71	18.65	2
3M	64QAM	1	0	18.62	18.71	18.61	2
		1	7	18.60	18.68	18.59	2
		1	14	18.59	18.72	18.57	2
		8	0	17.64	17.74	17.60	3
		8	3	17.64	17.75	17.63	3
		8	7	17.64	17.68	17.57	3
		15	0	17.58	17.70	17.59	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	20.60	20.69	20.61	0
		1	2	20.61	20.69	20.60	0
		1	5	20.59	20.75	20.58	0
		3	0	20.66	20.75	20.64	0
		3	1	20.61	20.77	20.62	0
		3	3	20.65	20.74	20.60	0
		6	0	19.66	19.76	19.63	1
1.4M	16QAM	1	0	19.60	19.70	19.66	1
		1	2	19.60	19.71	19.59	1
		1	5	19.58	19.73	19.65	1
		3	0	19.66	19.71	19.57	1
		3	1	19.66	19.72	19.59	1
		3	3	19.65	19.69	19.65	1
		6	0	18.59	18.75	18.67	2
1.4M	64QAM	1	0	18.65	18.70	18.57	2
		1	2	18.56	18.69	18.61	2
		1	5	18.64	18.69	18.66	2
		3	0	18.64	18.72	18.59	2
		3	1	18.62	18.71	18.64	2
		3	3	18.62	18.77	18.57	2
		6	0	17.62	17.69	17.63	3

LTE Conducted Power (Reduction)

LTE Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	18.62	18.81	18.69	0
		1	24	18.53	18.72	18.58	0
		1	49	18.56	18.69	18.59	0
		25	0	17.57	17.76	17.64	1
		25	12	17.46	17.69	17.56	1
		25	25	17.43	17.69	17.54	1
		50	0	17.59	17.78	17.66	1
10M	16QAM	1	0	17.55	17.67	17.62	1
		1	24	17.48	17.67	17.64	1
		1	49	17.52	17.68	17.57	1
		25	0	16.49	16.66	16.60	2
		25	12	16.49	16.68	16.61	2
		25	25	16.54	16.71	16.58	2
		50	0	16.53	16.75	16.63	2
10M	64QAM	1	0	16.57	16.66	16.60	2
		1	24	16.57	16.73	16.61	2
		1	49	16.57	16.70	16.63	2
		25	0	15.54	15.71	15.63	3
		25	12	15.49	15.67	15.63	3
		25	25	15.49	15.71	15.61	3
		50	0	15.56	15.75	15.56	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	18.50	18.67	18.60	0
		1	12	18.57	18.69	18.56	0
		1	24	18.51	18.68	18.56	0
		12	0	17.45	17.62	17.55	1
		12	6	17.50	17.69	17.58	1
		12	13	17.47	17.67	17.55	1
		25	0	17.47	17.64	17.57	1
5M	16QAM	1	0	17.52	17.75	17.63	1
		1	12	17.51	17.70	17.58	1
		1	24	17.53	17.70	17.59	1
		12	0	16.55	16.69	16.62	2
		12	6	16.55	16.73	16.59	2
		12	13	16.51	16.68	16.59	2
		25	0	16.57	16.71	16.58	2
5M	64QAM	1	0	16.49	16.73	16.64	2
		1	12	16.49	16.71	16.58	2
		1	24	16.50	16.71	16.64	2
		12	0	15.54	15.68	15.57	3
		12	6	15.52	15.67	15.57	3
		12	13	15.54	15.67	15.60	3
		25	0	15.51	15.71	15.63	3

LTE Conducted Power (Reduction)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	18.50	18.67	18.56	0
		1	7	18.48	18.75	18.61	0
		1	14	18.56	18.70	18.59	0
		8	0	17.45	17.62	17.51	1
		8	3	17.50	17.63	17.56	1
		8	7	17.46	17.65	17.52	1
		15	0	17.47	17.64	17.53	1
3M	16QAM	1	0	17.53	17.66	17.64	1
		1	7	17.55	17.67	17.55	1
		1	14	17.57	17.69	17.61	1
		8	0	16.52	16.75	16.59	2
		8	3	16.53	16.75	16.63	2
		8	7	16.50	16.75	16.62	2
		15	0	16.50	16.74	16.55	2
3M	64QAM	1	0	16.51	16.68	16.59	2
		1	7	16.56	16.75	16.57	2
		1	14	16.54	16.73	16.55	2
		8	0	15.53	15.72	15.62	3
		8	3	15.51	15.75	15.61	3
		8	7	15.50	15.70	15.59	3
		15	0	15.49	15.75	15.57	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	18.54	18.68	18.59	0
		1	2	18.48	18.68	18.57	0
		1	5	18.52	18.71	18.60	0
		3	0	18.49	18.75	18.58	0
		3	1	18.54	18.71	18.61	0
		3	3	18.55	18.68	18.60	0
		6	0	17.51	17.66	17.56	1
1.4M	16QAM	1	0	17.56	17.71	17.62	1
		1	2	17.51	17.73	17.62	1
		1	5	17.56	17.75	17.62	1
		3	0	17.57	17.68	17.61	1
		3	1	17.57	17.72	17.63	1
		3	3	17.54	17.70	17.55	1
		6	0	16.57	16.74	16.59	2
1.4M	64QAM	1	0	16.48	16.74	16.57	2
		1	2	16.55	16.74	16.55	2
		1	5	16.51	16.75	16.63	2
		3	0	16.56	16.67	16.57	2
		3	1	16.49	16.72	16.56	2
		3	3	16.50	16.69	16.61	2
		6	0	15.49	15.72	15.63	3

LTE Conducted Power (Reduction)

LTE Band 7

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	18.72	18.89	18.82	0
		1	50	18.65	18.79	18.69	0
		1	99	18.58	18.79	18.70	0
		50	0	17.67	17.84	17.77	1
		50	25	17.57	17.76	17.68	1
		50	50	17.61	17.75	17.65	1
		100	0	17.69	17.86	17.79	1
20M	16QAM	1	0	17.64	17.84	17.72	1
		1	50	17.62	17.79	17.74	1
		1	99	17.63	17.83	17.70	1
		50	0	16.63	16.81	16.71	2
		50	25	16.60	16.81	16.71	2
		50	50	16.57	16.78	16.69	2
		100	0	16.65	16.76	16.75	2
20M	64QAM	1	0	16.58	16.75	16.68	2
		1	50	16.66	16.79	16.72	2
		1	99	16.58	16.78	16.77	2
		50	0	15.63	15.82	15.75	3
		50	25	15.58	15.75	15.75	3
		50	50	15.60	15.76	15.74	3
		100	0	15.60	15.83	15.68	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	18.66	18.76	18.71	0
		1	37	18.61	18.79	18.77	0
		1	74	18.64	18.78	18.75	0
		36	0	17.61	17.71	17.66	1
		36	19	17.52	17.74	17.71	1
		36	39	17.52	17.71	17.63	1
		75	0	17.63	17.73	17.68	1
15M	16QAM	1	0	17.62	17.75	17.77	1
		1	37	17.58	17.79	17.71	1
		1	74	17.57	17.77	17.72	1
		36	0	16.59	16.82	16.70	2
		36	19	16.62	16.77	16.75	2
		36	39	16.57	16.77	16.77	2
		75	0	16.59	16.82	16.70	2
15M	64QAM	1	0	16.62	16.78	16.72	2
		1	37	16.58	16.80	16.75	2
		1	74	16.60	16.80	16.77	2
		36	0	15.66	15.83	15.69	3
		36	19	15.65	15.82	15.75	3
		36	39	15.62	15.80	15.69	3
		75	0	15.58	15.80	15.74	3

LTE Conducted Power (Reduction)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	18.65	18.79	18.69	0
		1	24	18.63	18.81	18.75	0
		1	49	18.61	18.77	18.69	0
		25	0	17.60	17.74	17.64	1
		25	12	17.53	17.79	17.62	1
		25	25	17.54	17.71	17.65	1
		50	0	17.62	17.76	17.66	1
10M	16QAM	1	0	17.63	17.82	17.77	1
		1	24	17.62	17.82	17.72	1
		1	49	17.57	17.77	17.68	1
		25	0	16.57	16.76	16.77	2
		25	12	16.58	16.84	16.77	2
		25	25	16.60	16.78	16.71	2
		50	0	16.60	16.79	16.72	2
10M	64QAM	1	0	16.60	16.76	16.70	2
		1	24	16.63	16.82	16.71	2
		1	49	16.60	16.84	16.74	2
		25	0	15.63	15.80	15.75	3
		25	12	15.66	15.79	15.76	3
		25	25	15.58	15.75	15.75	3
		50	0	15.58	15.75	15.68	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	18.65	18.75	18.75	0
		1	12	18.64	18.75	18.74	0
		1	24	18.58	18.75	18.68	0
		12	0	17.60	17.70	17.70	1
		12	6	17.60	17.75	17.64	1
		12	13	17.55	17.74	17.66	1
		25	0	17.62	17.72	17.72	1
5M	16QAM	1	0	17.60	17.81	17.69	1
		1	12	17.66	17.83	17.75	1
		1	24	17.59	17.83	17.68	1
		12	0	16.62	16.78	16.68	2
		12	6	16.60	16.79	16.68	2
		12	13	16.63	16.75	16.68	2
		25	0	16.59	16.76	16.70	2
5M	64QAM	1	0	16.66	16.84	16.74	2
		1	12	16.64	16.80	16.70	2
		1	24	16.65	16.84	16.73	2
		12	0	15.63	15.75	15.71	3
		12	6	15.64	15.75	15.76	3
		12	13	15.66	15.77	15.71	3
		25	0	15.62	15.75	15.77	3

LTE Conducted Power (Reduction)

LTE Band 12

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	21.49	21.59	21.76	0
		1	24	21.41	21.50	21.70	0
		1	49	21.42	21.53	21.66	0
		25	0	20.44	20.54	20.71	1
		25	12	20.38	20.41	20.64	1
		25	25	20.35	20.49	20.64	1
		50	0	20.46	20.56	20.73	1
10M	16QAM	1	0	20.42	20.44	20.69	1
		1	24	20.36	20.44	20.69	1
		1	49	20.36	20.49	20.68	1
		25	0	19.37	19.53	19.65	2
		25	12	19.36	19.49	19.65	2
		25	25	19.38	19.54	19.70	2
		50	0	19.41	19.52	19.67	2
10M	64QAM	1	0	19.38	19.54	19.63	2
		1	24	19.43	19.48	19.62	2
		1	49	19.39	19.51	19.69	2
		25	0	18.38	18.46	18.70	3
		25	12	18.41	18.47	18.67	3
		25	25	18.36	18.46	18.68	3
		50	0	18.43	18.52	18.71	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	21.38	21.48	21.71	0
		1	12	21.41	21.44	21.71	0
		1	24	21.34	21.49	21.70	0
		12	0	20.33	20.43	20.66	1
		12	6	20.32	20.47	20.60	1
		12	13	20.38	20.41	20.66	1
		25	0	20.35	20.45	20.68	1
5M	16QAM	1	0	20.38	20.45	20.69	1
		1	12	20.35	20.50	20.69	1
		1	24	20.42	20.46	20.64	1
		12	0	19.36	19.53	19.68	2
		12	6	19.40	19.54	19.65	2
		12	13	19.42	19.50	19.62	2
		25	0	19.43	19.51	19.65	2
5M	64QAM	1	0	19.40	19.52	19.69	2
		1	12	19.41	19.54	19.65	2
		1	24	19.39	19.53	19.62	2
		12	0	18.35	18.49	18.67	3
		12	6	18.34	18.54	18.68	3
		12	13	18.36	18.50	18.63	3
		25	0	18.43	18.51	18.68	3

LTE Conducted Power (Reduction)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	21.35	21.54	21.69	0
		1	7	21.36	21.54	21.71	0
		1	14	21.34	21.45	21.65	0
		8	0	20.30	20.49	20.64	1
		8	3	20.34	20.47	20.59	1
		8	7	20.34	20.41	20.65	1
		15	0	20.32	20.51	20.66	1
3M	16QAM	1	0	20.43	20.44	20.62	1
		1	7	20.39	20.49	20.69	1
		1	14	20.40	20.53	20.62	1
		8	0	19.43	19.45	19.67	2
		8	3	19.34	19.49	19.68	2
		8	7	19.35	19.46	19.64	2
		15	0	19.35	19.48	19.66	2
3M	64QAM	1	0	19.37	19.52	19.69	2
		1	7	19.42	19.48	19.69	2
		1	14	19.36	19.47	19.67	2
		8	0	18.44	18.52	18.70	3
		8	3	18.34	18.44	18.71	3
		8	7	18.41	18.44	18.63	3
		15	0	18.35	18.54	18.67	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	21.37	21.47	21.68	0
		1	2	21.42	21.54	21.65	0
		1	5	21.37	21.51	21.71	0
		3	0	21.42	21.46	21.62	0
		3	1	21.41	21.53	21.71	0
		3	3	21.36	21.46	21.65	0
		6	0	20.36	20.45	20.62	1
1.4M	16QAM	1	0	20.41	20.46	20.66	1
		1	2	20.35	20.48	20.65	1
		1	5	20.37	20.45	20.71	1
		3	0	20.40	20.47	20.63	1
		3	1	20.40	20.52	20.68	1
		3	3	20.40	20.51	20.69	1
		6	0	19.37	19.47	19.63	2
1.4M	64QAM	1	0	19.38	19.46	19.65	2
		1	2	19.43	19.44	19.63	2
		1	5	19.38	19.47	19.71	2
		3	0	19.39	19.44	19.67	2
		3	1	19.34	19.49	19.65	2
		3	3	19.36	19.51	19.66	2
		6	0	18.35	18.47	18.69	3

LTE Conducted Power (Reduction)

LTE Band 13

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		22.48		0
		1	24		22.43		0
		1	49		22.38		0
		25	0		21.43		1
		25	12		21.28		1
		25	25		21.35		1
		50	0		21.45		1
10M	16QAM	1	0		21.40		1
		1	24		21.39		1
		1	49		21.33		1
		25	0		20.42		2
		25	12		20.35		2
		25	25		20.39		2
		50	0		20.34		2
10M	64QAM	1	0		20.34		2
		1	24		20.43		2
		1	49		20.38		2
		25	0		19.43		3
		25	12		19.43		3
		25	25		19.41		3
		50	0		19.33		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	22.39	22.39	22.38	0
		1	12	22.40	22.36	22.31	0
		1	24	22.38	22.37	22.38	0
		12	0	21.25	21.33	21.29	1
		12	6	21.32	21.35	21.27	1
		12	13	21.31	21.33	21.28	1
		25	0	21.27	21.35	21.31	1
5M	16QAM	1	0	21.36	21.38	21.37	1
		1	12	21.30	21.36	21.34	1
		1	24	21.36	21.35	21.37	1
		12	0	20.33	20.36	20.37	2
		12	6	20.40	20.35	20.37	2
		12	13	20.32	20.36	20.34	2
		25	0	20.38	20.39	20.35	2
5M	64QAM	1	0	20.32	20.42	20.30	2
		1	12	20.40	20.43	20.30	2
		1	24	20.36	20.38	20.29	2
		12	0	19.37	19.42	19.30	3
		12	6	19.38	19.39	19.32	3
		12	13	19.32	19.42	19.28	3
		25	0	19.38	19.33	19.28	3

LTE Conducted Power (Reduction)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		21.71		0
		1	24		21.66		0
		1	49		21.66		0
		25	0		20.66		1
		25	12		20.51		1
		25	25		20.59		1
		50	0		20.68		1
10M	16QAM	1	0		20.64		1
		1	24		20.64		1
		1	49		20.61		1
		25	0		19.58		2
		25	12		19.59		2
		25	25		19.64		2
		50	0		19.59		2
10M	64QAM	1	0		19.57		2
		1	24		19.64		2
		1	49		19.61		2
		25	0		18.66		3
		25	12		18.58		3
		25	25		18.62		3
		50	0		18.66		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	21.57	21.63	21.48	0
		1	12	21.55	21.63	21.51	0
		1	24	21.58	21.63	21.55	0
		12	0	20.52	20.56	20.51	1
		12	6	20.48	20.51	20.49	1
		12	13	20.48	20.52	20.52	1
		25	0	20.54	20.58	20.53	1
5M	16QAM	1	0	20.59	20.63	20.57	1
		1	12	20.55	20.66	20.56	1
		1	24	20.59	20.57	20.50	1
		12	0	19.54	19.65	19.48	2
		12	6	19.55	19.66	19.49	2
		12	13	19.56	19.59	19.50	2
		25	0	19.55	19.65	19.57	2
5M	64QAM	1	0	19.58	19.61	19.48	2
		1	12	19.50	19.63	19.55	2
		1	24	19.58	19.57	19.50	2
		12	0	18.55	18.59	18.53	3
		12	6	18.51	18.64	18.57	3
		12	13	18.53	18.56	18.55	3
		25	0	18.60	18.65	18.48	3

LTE Conducted Power (Reduction)

LTE Band 25

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	20.39	20.36	20.46	0
		1	50	20.33	20.24	20.34	0
		1	99	20.25	20.22	20.37	0
		50	0	19.34	19.31	19.41	1
		50	25	19.20	19.21	19.28	1
		50	50	19.21	19.19	19.27	1
		100	0	19.36	19.33	19.43	1
20M	16QAM	1	0	19.25	19.23	19.36	1
		1	50	19.26	19.30	19.32	1
		1	99	19.26	19.27	19.33	1
		50	0	18.32	18.29	18.41	2
		50	25	18.25	18.29	18.38	2
		50	50	18.33	18.26	18.33	2
		100	0	18.26	18.30	18.37	2
20M	64QAM	1	0	18.29	18.26	18.35	2
		1	50	18.30	18.22	18.39	2
		1	99	18.27	18.24	18.41	2
		50	0	17.34	17.21	17.34	3
		50	25	17.29	17.23	17.39	3
		50	50	17.30	17.27	17.32	3
		100	0	17.33	17.26	17.33	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	20.26	20.23	20.39	0
		1	37	20.29	20.25	20.36	0
		1	74	20.32	20.24	20.35	0
		36	0	19.21	19.18	19.34	1
		36	19	19.27	19.16	19.29	1
		36	39	19.29	19.21	19.28	1
		75	0	19.23	19.20	19.36	1
15M	16QAM	1	0	19.27	19.22	19.38	1
		1	37	19.25	19.23	19.34	1
		1	74	19.31	19.28	19.41	1
		36	0	18.28	18.24	18.35	2
		36	19	18.25	18.28	18.40	2
		36	39	18.32	18.24	18.34	2
		75	0	18.32	18.28	18.35	2
15M	64QAM	1	0	18.26	18.21	18.40	2
		1	37	18.31	18.28	18.33	2
		1	74	18.29	18.30	18.36	2
		36	0	17.33	17.26	17.39	3
		36	19	17.25	17.29	17.33	3
		36	39	17.34	17.26	17.40	3
		75	0	17.28	17.27	17.36	3

LTE Conducted Power (Reduction)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	20.26	20.28	20.33	0
		1	24	20.32	20.29	20.32	0
		1	49	20.25	20.22	20.34	0
		25	0	19.21	19.23	19.28	1
		25	12	19.29	19.16	19.36	1
		25	25	19.20	19.17	19.34	1
		50	0	19.23	19.25	19.30	1
10M	16QAM	1	0	19.30	19.26	19.33	1
		1	24	19.31	19.25	19.36	1
		1	49	19.26	19.23	19.33	1
		25	0	18.32	18.30	18.32	2
		25	12	18.32	18.21	18.39	2
		25	25	18.27	18.23	18.34	2
		50	0	18.30	18.27	18.36	2
10M	64QAM	1	0	18.29	18.28	18.34	2
		1	24	18.27	18.28	18.40	2
		1	49	18.28	18.28	18.32	2
		25	0	17.26	17.23	17.35	3
		25	12	17.34	17.24	17.33	3
		25	25	17.27	17.23	17.37	3
		50	0	17.31	17.22	17.36	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	20.29	20.25	20.37	0
		1	12	20.30	20.26	20.33	0
		1	24	20.34	20.27	20.39	0
		12	0	19.24	19.20	19.32	1
		12	6	19.25	19.17	19.30	1
		12	13	19.21	19.24	19.27	1
		25	0	19.26	19.22	19.34	1
5M	16QAM	1	0	19.32	19.24	19.38	1
		1	12	19.33	19.25	19.34	1
		1	24	19.34	19.26	19.37	1
		12	0	18.25	18.30	18.36	2
		12	6	18.29	18.27	18.37	2
		12	13	18.32	18.25	18.36	2
		25	0	18.32	18.22	18.32	2
5M	64QAM	1	0	18.33	18.26	18.36	2
		1	12	18.29	18.30	18.37	2
		1	24	18.29	18.30	18.40	2
		12	0	17.27	17.26	17.36	3
		12	6	17.30	17.26	17.40	3
		12	13	17.29	17.21	17.33	3
		25	0	17.25	17.24	17.32	3

LTE Conducted Power (Reduction)

LTE Band 25

BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	20.25	20.25	20.36	0
		1	7	20.33	20.29	20.33	0
		1	14	20.33	20.22	20.39	0
		8	0	19.20	19.20	19.31	1
		8	3	19.21	19.17	19.32	1
		8	7	19.29	19.24	19.32	1
		15	0	19.22	19.22	19.33	1
3M	16QAM	1	0	19.32	19.21	19.41	1
		1	7	19.25	19.27	19.38	1
		1	14	19.32	19.22	19.37	1
		8	0	18.33	18.24	18.40	2
		8	3	18.34	18.24	18.34	2
		8	7	18.26	18.30	18.41	2
		15	0	18.32	18.22	18.35	2
3M	64QAM	1	0	18.29	18.25	18.40	2
		1	7	18.31	18.29	18.40	2
		1	14	18.33	18.25	18.33	2
		8	0	17.28	17.21	17.40	3
		8	3	17.32	17.24	17.38	3
		8	7	17.34	17.30	17.33	3
		15	0	17.25	17.21	17.34	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	20.30	20.27	20.39	0
		1	2	20.29	20.21	20.33	0
		1	5	20.25	20.23	20.37	0
		3	0	20.25	20.30	20.32	0
		3	1	20.27	20.25	20.40	0
		3	3	20.33	20.21	20.39	0
		6	0	19.27	19.30	19.32	1
1.4M	16QAM	1	0	19.32	19.30	19.35	1
		1	2	19.29	19.24	19.33	1
		1	5	19.25	19.25	19.35	1
		3	0	19.33	19.22	19.38	1
		3	1	19.25	19.25	19.37	1
		3	3	19.28	19.25	19.32	1
		6	0	18.34	18.28	18.38	2
1.4M	64QAM	1	0	18.29	18.25	18.40	2
		1	2	18.29	18.30	18.36	2
		1	5	18.32	18.27	18.39	2
		3	0	18.25	18.30	18.34	2
		3	1	18.33	18.24	18.35	2
		3	3	18.31	18.24	18.33	2
		6	0	17.27	17.30	17.34	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	19.85	19.84	19.89	0
		1	37	19.73	19.78	19.83	0
		1	74	19.78	19.78	19.77	0
		36	0	18.80	18.79	18.84	1
		36	19	18.71	18.65	18.73	1
		36	39	18.69	18.69	18.78	1
		75	0	18.82	18.81	18.86	1
15M	16QAM	1	0	18.77	18.75	18.78	1
		1	37	18.80	18.77	18.82	1
		1	74	18.71	18.71	18.78	1
		36	0	17.72	17.74	17.75	2
		36	19	17.79	17.76	17.80	2
		36	39	17.72	17.72	17.75	2
		75	0	17.74	17.79	17.81	2
15M	64QAM	1	0	17.79	17.77	17.76	2
		1	37	17.72	17.79	17.83	2
		1	74	17.75	17.77	17.77	2
		36	0	16.73	16.77	16.78	3
		36	19	16.75	16.70	16.82	3
		36	39	16.78	16.72	16.75	3
		75	0	16.74	16.79	16.76	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	19.80	19.78	19.78	0
		1	24	19.72	19.79	19.79	0
		1	49	19.77	19.78	19.76	0
		25	0	18.75	18.73	18.73	1
		25	12	18.69	18.70	18.77	1
		25	25	18.71	18.73	18.74	1
		50	0	18.77	18.75	18.75	1
10M	16QAM	1	0	18.78	18.72	18.77	1
		1	24	18.75	18.78	18.76	1
		1	49	18.72	18.73	18.78	1
		25	0	17.71	17.76	17.78	2
		25	12	17.80	17.70	17.80	2
		25	25	17.77	17.74	17.84	2
		50	0	17.72	17.77	17.75	2
10M	64QAM	1	0	17.73	17.75	17.76	2
		1	24	17.80	17.79	17.83	2
		1	49	17.74	17.73	17.84	2
		25	0	16.73	16.75	16.83	3
		25	12	16.71	16.71	16.84	3
		25	25	16.75	16.77	16.79	3
		50	0	16.71	16.73	16.80	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	19.76	19.73	19.79	0
		1	12	19.73	19.77	19.84	0
		1	24	19.73	19.75	19.81	0
		12	0	18.71	18.68	18.74	1
		12	6	18.73	18.64	18.78	1
		12	13	18.75	18.66	18.78	1
		25	0	18.73	18.70	18.76	1
5M	16QAM	1	0	18.79	18.79	18.75	1
		1	12	18.75	18.71	18.75	1
		1	24	18.78	18.74	18.84	1
		12	0	17.76	17.77	17.80	2
		12	6	17.78	17.76	17.79	2
		12	13	17.71	17.73	17.84	2
		25	0	17.73	17.76	17.79	2
5M	64QAM	1	0	17.78	17.76	17.80	2
		1	12	17.76	17.72	17.76	2
		1	24	17.73	17.75	17.76	2
		12	0	16.80	16.77	16.82	3
		12	6	16.71	16.73	16.77	3
		12	13	16.73	16.71	16.80	3
		25	0	16.76	16.71	16.82	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	19.78	19.70	19.75	0
		1	7	19.74	19.70	19.75	0
		1	14	19.76	19.73	19.77	0
		8	0	18.73	18.65	18.70	1
		8	3	18.75	18.68	18.78	1
		8	7	18.73	18.72	18.70	1
		15	0	18.75	18.67	18.72	1
3M	16QAM	1	0	18.74	18.72	18.79	1
		1	7	18.77	18.74	18.76	1
		1	14	18.74	18.71	18.80	1
		8	0	17.73	17.76	17.82	2
		8	3	17.73	17.76	17.83	2
		8	7	17.76	17.71	17.75	2
		15	0	17.78	17.73	17.82	2
3M	64QAM	1	0	17.74	17.74	17.81	2
		1	7	17.80	17.76	17.83	2
		1	14	17.77	17.76	17.79	2
		8	0	16.71	16.70	16.84	3
		8	3	16.80	16.75	16.82	3
		8	7	16.78	16.73	16.75	3
		15	0	16.71	16.72	16.75	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	19.79	19.75	19.76	0
		1	2	19.74	19.72	19.82	0
		1	5	19.77	19.79	19.80	0
		3	0	19.77	19.71	19.82	0
		3	1	19.79	19.72	19.75	0
		3	3	19.75	19.75	19.79	0
		6	0	18.75	18.71	18.80	1
1.4M	16QAM	1	0	18.76	18.74	18.76	1
		1	2	18.74	18.77	18.83	1
		1	5	18.76	18.71	18.77	1
		3	0	18.71	18.72	18.82	1
		3	1	18.74	18.71	18.76	1
		3	3	18.79	18.75	18.83	1
		6	0	17.75	17.76	17.75	2
1.4M	64QAM	1	0	17.74	17.78	17.80	2
		1	2	17.79	17.70	17.78	2
		1	5	17.80	17.74	17.84	2
		3	0	17.71	17.76	17.75	2
		3	1	17.75	17.71	17.84	2
		3	3	17.73	17.72	17.84	2
		6	0	16.78	16.76	16.77	3

LTE Conducted Power (Reduction)

LTE Band 38

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	20.87	20.83	20.97	0
		1	50	20.77	20.72	20.82	0
		1	99	20.82	20.72	20.86	0
		50	0	19.82	19.78	19.92	1
		50	25	19.75	19.67	19.78	1
		50	50	19.74	19.68	19.82	1
		100	0	19.84	19.80	19.94	1
20M	16QAM	1	0	19.76	19.76	19.91	1
		1	50	19.73	19.76	19.85	1
		1	99	19.81	19.75	19.83	1
		50	0	18.79	18.73	18.89	2
		50	25	18.76	18.71	18.87	2
		50	50	18.80	18.73	18.87	2
		100	0	18.75	18.70	18.90	2
20M	64QAM	1	0	18.76	18.71	18.85	2
		1	50	18.75	18.75	18.85	2
		1	99	18.78	18.73	18.92	2
		50	0	17.82	17.70	17.87	3
		50	25	17.79	17.68	17.88	3
		50	50	17.80	17.68	17.82	3
		100	0	17.78	17.77	17.91	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	20.79	20.69	20.90	0
		1	37	20.79	20.72	20.82	0
		1	74	20.74	20.74	20.85	0
		36	0	19.74	19.64	19.85	1
		36	19	19.75	19.66	19.84	1
		36	39	19.76	19.66	19.77	1
		75	0	19.76	19.66	19.87	1
15M	16QAM	1	0	19.76	19.68	19.84	1
		1	37	19.82	19.74	19.84	1
		1	74	19.81	19.77	19.91	1
		36	0	18.75	18.68	18.89	2
		36	19	18.82	18.69	18.90	2
		36	39	18.81	18.73	18.83	2
		75	0	18.75	18.69	18.91	2
15M	64QAM	1	0	18.74	18.72	18.92	2
		1	37	18.78	18.73	18.82	2
		1	74	18.74	18.77	18.91	2
		36	0	17.76	17.76	17.92	3
		36	19	17.78	17.68	17.85	3
		36	39	17.73	17.74	17.83	3
		75	0	17.76	17.74	17.82	3

LTE Conducted Power (Reduction)

LTE Band 38

BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	20.73	20.69	20.85	0
		1	24	20.76	20.71	20.86	0
		1	49	20.74	20.76	20.87	0
		25	0	19.68	19.64	19.80	1
		25	12	19.73	19.64	19.83	1
		25	25	19.73	19.71	19.78	1
		50	0	19.70	19.66	19.82	1
10M	16QAM	1	0	19.82	19.76	19.86	1
		1	24	19.78	19.70	19.89	1
		1	49	19.76	19.70	19.82	1
		25	0	18.78	18.71	18.90	2
		25	12	18.75	18.71	18.87	2
		25	25	18.80	18.74	18.85	2
		50	0	18.74	18.70	18.87	2
10M	64QAM	1	0	18.79	18.68	18.86	2
		1	24	18.78	18.75	18.91	2
		1	49	18.77	18.71	18.92	2
		25	0	17.77	17.77	17.89	3
		25	12	17.82	17.69	17.82	3
		25	25	17.81	17.75	17.84	3
		50	0	17.82	17.71	17.91	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	20.73	20.75	20.83	0
		1	12	20.75	20.76	20.91	0
		1	24	20.73	20.69	20.90	0
		12	0	19.68	19.70	19.78	1
		12	6	19.73	19.72	19.84	1
		12	13	19.77	19.63	19.80	1
		25	0	19.70	19.72	19.80	1
5M	16QAM	1	0	19.81	19.69	19.83	1
		1	12	19.74	19.72	19.90	1
		1	24	19.76	19.73	19.87	1
		12	0	18.74	18.72	18.85	2
		12	6	18.80	18.72	18.85	2
		12	13	18.78	18.70	18.89	2
		25	0	18.81	18.70	18.89	2
5M	64QAM	1	0	18.81	18.77	18.86	2
		1	12	18.79	18.69	18.89	2
		1	24	18.76	18.76	18.84	2
		12	0	17.79	17.68	17.86	3
		12	6	17.78	17.73	17.90	3
		12	13	17.80	17.72	17.83	3
		25	0	17.74	17.71	17.82	3

LTE Conducted Power (Reduction)									
LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	18.77	19.04	18.83	19.11	19.13	0
		1	50	18.66	18.95	18.74	18.99	19.07	0
		1	99	18.70	18.90	18.74	19.00	18.98	0
		50	0	17.72	17.99	17.78	18.06	18.08	1
		50	25	17.64	17.90	17.64	17.94	17.96	1
		50	50	17.57	17.91	17.71	17.91	18.02	1
20M	16QAM	100	0	17.74	18.01	17.80	18.08	18.10	1
		1	0	17.62	17.96	17.74	17.99	18.02	1
		1	50	17.62	17.96	17.70	18.03	18.03	1
		1	99	17.68	17.92	17.70	17.97	17.98	1
		50	0	16.65	16.96	16.77	17.03	17.02	2
		50	25	16.69	16.97	16.75	16.98	17.00	2
20M	64QAM	50	50	16.69	16.96	16.75	17.04	17.05	2
		100	0	16.65	16.96	16.71	17.02	16.98	2
		1	0	16.72	16.92	16.70	16.96	17.01	2
		1	50	16.65	16.93	16.76	17.05	17.01	2
		1	99	16.64	16.91	16.71	16.99	17.02	2
		50	0	15.69	15.89	15.73	15.99	16.06	3
20M	64QAM	50	25	15.68	15.97	15.72	16.05	16.05	3
		50	50	15.72	15.95	15.70	16.00	15.98	3
		100	0	15.64	15.95	15.73	15.98	16.01	3
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	18.66	18.98	18.71	19.05	18.99	0
		1	37	18.68	18.91	18.75	18.97	19.05	0
		1	74	18.66	18.90	18.71	19.02	19.02	0
		36	0	17.61	17.93	17.66	18.00	17.94	1
		36	19	17.63	17.88	17.66	17.98	17.96	1
		36	39	17.60	17.87	17.72	17.92	17.94	1
		75	0	17.63	17.95	17.68	18.02	17.96	1
15M	16QAM	1	0	17.72	17.95	17.75	18.02	18.04	1
		1	37	17.71	17.94	17.70	17.96	17.98	1
		1	74	17.64	17.91	17.72	17.98	18.03	1
		36	0	16.63	16.96	16.76	16.99	17.07	2
		36	19	16.66	16.91	16.76	16.98	17.03	2
		36	39	16.65	16.92	16.77	17.05	17.01	2
		75	0	16.69	16.92	16.69	17.04	16.98	2
15M	64QAM	1	0	16.70	16.90	16.75	17.02	16.99	2
		1	37	16.65	16.93	16.68	16.96	17.07	2
		1	74	16.70	16.96	16.77	17.03	16.99	2
		36	0	15.71	15.95	15.73	15.99	16.02	3
		36	19	15.68	15.91	15.68	15.97	16.01	3
		36	39	15.67	15.98	15.74	16.01	16.01	3
		75	0	15.63	15.93	15.76	15.96	16.05	3

LTE Conducted Power (Reduction)									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	18.71	18.96	18.73	19.01	18.98	0
		1	24	18.67	18.92	18.77	19.00	19.00	0
		1	49	18.68	18.94	18.74	19.03	19.03	0
		25	0	17.66	17.91	17.68	17.96	17.93	1
		25	12	17.57	17.92	17.71	17.96	17.98	1
		25	25	17.63	17.89	17.72	17.94	17.97	1
10M	16QAM	50	0	17.68	17.93	17.70	17.98	17.95	1
		1	0	17.69	17.95	17.74	17.97	18.06	1
		1	24	17.71	17.89	17.68	17.97	17.98	1
		1	49	17.62	17.95	17.75	17.98	18.05	1
		25	0	16.64	16.98	16.68	17.02	17.02	2
		25	12	16.68	16.96	16.75	16.97	17.00	2
10M	64QAM	25	25	16.69	16.98	16.74	17.00	17.01	2
		50	0	16.65	16.96	16.72	17.04	17.03	2
		1	0	16.70	16.91	16.76	16.97	17.07	2
		1	24	16.72	16.93	16.71	16.98	17.02	2
		1	49	16.72	16.92	16.69	16.98	17.00	2
		25	0	15.72	15.97	15.68	16.01	15.98	3
10M	64QAM	25	12	15.71	15.96	15.70	15.96	16.03	3
		25	25	15.64	15.92	15.77	15.99	16.05	3
		50	0	15.62	15.90	15.70	15.96	15.99	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	18.68	18.92	18.70	18.98	18.98	0
		1	12	18.66	18.93	18.76	18.96	19.07	0
		1	24	18.71	18.97	18.77	19.03	19.07	0
		12	0	17.63	17.87	17.65	17.93	17.93	1
		12	6	17.65	17.84	17.70	17.92	17.97	1
		12	13	17.61	17.93	17.68	17.99	17.99	1
5M	16QAM	25	0	17.65	17.89	17.67	17.95	17.95	1
		1	0	17.71	17.96	17.71	17.98	18.01	1
		1	12	17.66	17.91	17.69	17.97	18.04	1
		1	24	17.63	17.98	17.77	17.96	17.99	1
		12	0	16.68	16.93	16.75	16.99	17.05	2
		12	6	16.63	16.93	16.76	16.98	16.99	2
5M	64QAM	12	13	16.65	16.90	16.74	17.05	17.00	2
		25	0	16.70	16.94	16.71	17.01	17.07	2
		1	0	16.63	16.89	16.73	17.02	17.03	2
		1	12	16.72	16.94	16.73	17.05	17.04	2
		1	24	16.72	16.96	16.70	17.05	16.98	2
		12	0	15.62	15.93	15.70	16.05	16.02	3
5M	64QAM	12	6	15.66	15.89	15.74	15.98	16.06	3
		12	13	15.71	15.97	15.70	15.97	16.03	3
		25	0	15.68	15.95	15.74	15.99	16.00	3
		25	0	15.68	15.95	15.74	15.99	16.00	3

LTE Conducted Power (Reduction)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	14.95	14.41	14.44	14.92	0
		1	50	14.81	14.29	14.34	14.78	0
		1	99	14.87	14.31	14.35	14.81	0
		50	0	13.90	13.36	13.39	13.87	1
		50	25	13.77	13.30	13.25	13.75	1
		50	50	13.84	13.26	13.28	13.79	1
		100	0	13.92	13.38	13.41	13.89	1
20M	16QAM	1	0	13.87	13.32	13.37	13.77	1
		1	50	13.83	13.35	13.34	13.82	1
		1	99	13.87	13.34	13.38	13.86	1
		50	0	12.84	12.28	12.38	12.82	2
		50	25	12.89	12.33	12.36	12.79	2
		50	50	12.84	12.36	12.30	12.85	2
		100	0	12.89	12.31	12.34	12.86	2
20M	64QAM	1	0	12.83	12.31	12.36	12.83	2
		1	50	12.82	12.29	12.36	12.83	2
		1	99	12.89	12.34	12.33	12.84	2
		50	0	11.82	11.36	11.38	11.77	3
		50	25	11.87	11.31	11.32	11.77	3
		50	50	11.84	11.32	11.35	11.80	3
		100	0	11.86	11.32	11.34	11.87	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	14.89	14.34	14.38	14.79	0
		1	37	14.89	14.29	14.38	14.87	0
		1	74	14.85	14.30	14.36	14.81	0
		36	0	13.84	13.29	13.33	13.74	1
		36	19	13.80	13.29	13.31	13.80	1
		36	39	13.84	13.30	13.26	13.78	1
		75	0	13.86	13.31	13.35	13.76	1
15M	16QAM	1	0	13.83	13.31	13.29	13.87	1
		1	37	13.81	13.31	13.34	13.83	1
		1	74	13.89	13.30	13.29	13.82	1
		36	0	12.85	12.35	12.33	12.87	2
		36	19	12.87	12.29	12.37	12.80	2
		36	39	12.88	12.36	12.34	12.81	2
		75	0	12.84	12.32	12.36	12.81	2
15M	64QAM	1	0	12.88	12.33	12.38	12.85	2
		1	37	12.85	12.27	12.32	12.82	2
		1	74	12.80	12.28	12.35	12.84	2
		36	0	11.84	11.33	11.32	11.85	3
		36	19	11.87	11.34	11.31	11.80	3
		36	39	11.83	11.31	11.30	11.86	3
		75	0	11.82	11.29	11.37	11.77	3

LTE Conducted Power (Reduction)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	14.82	14.28	14.35	14.78	0
		1	24	14.82	14.34	14.30	14.84	0
		1	49	14.80	14.28	14.36	14.84	0
		25	0	13.77	13.23	13.30	13.73	1
		25	12	13.76	13.30	13.31	13.76	1
		25	25	13.77	13.23	13.29	13.72	1
10M	16QAM	50	0	13.79	13.25	13.32	13.75	1
		1	0	13.83	13.31	13.37	13.78	1
		1	24	13.85	13.30	13.33	13.78	1
		1	49	13.87	13.32	13.30	13.79	1
		25	0	12.85	12.26	12.37	12.85	2
		25	12	12.85	12.33	12.37	12.86	2
10M	64QAM	25	25	12.80	12.34	12.36	12.86	2
		50	0	12.86	12.29	12.35	12.81	2
		1	0	12.83	12.32	12.34	12.77	2
		1	24	12.85	12.28	12.30	12.81	2
		1	49	12.83	12.33	12.38	12.83	2
		25	0	11.80	11.35	11.36	11.81	3
5M	QPSK	25	12	11.81	11.33	11.34	11.77	3
		25	25	11.80	11.31	11.33	11.80	3
		50	0	11.80	11.36	11.32	11.84	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	14.87	14.28	14.36	14.79	0
		1	12	14.86	14.26	14.33	14.81	0
		1	24	14.81	14.32	14.36	14.85	0
		12	0	13.82	13.23	13.31	13.74	1
		12	6	13.77	13.24	13.31	13.79	1
		12	13	13.84	13.25	13.25	13.73	1
5M	16QAM	25	0	13.84	13.25	13.33	13.76	1
		1	0	13.88	13.28	13.34	13.83	1
		1	12	13.80	13.27	13.31	13.81	1
		1	24	13.81	13.30	13.33	13.87	1
		12	0	12.87	12.35	12.33	12.86	2
		12	6	12.87	12.35	12.29	12.79	2
5M	64QAM	12	13	12.87	12.28	12.31	12.81	2
		25	0	12.81	12.29	12.36	12.84	2
		1	0	12.80	12.27	12.29	12.83	2
		1	12	12.85	12.36	12.35	12.80	2
		1	24	12.84	12.36	12.38	12.85	2
		12	0	11.83	11.33	11.36	11.86	3
5M	QPSK	12	6	11.88	11.30	11.30	11.79	3
		12	13	11.83	11.28	11.36	11.85	3
		25	0	11.86	11.34	11.34	11.79	3

LTE Conducted Power (Reduction)

LTE Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	20.61	20.75	20.64	0
		1	50	20.50	20.63	20.51	0
		1	99	20.52	20.61	20.50	0
		50	0	19.56	19.70	19.59	1
		50	25	19.45	19.64	19.49	1
		50	50	19.45	19.63	19.47	1
		100	0	19.58	19.72	19.61	1
20M	16QAM	1	0	19.47	19.62	19.54	1
		1	50	19.47	19.69	19.53	1
		1	99	19.56	19.62	19.51	1
		50	0	18.49	18.67	18.52	2
		50	25	18.47	18.63	18.49	2
		50	50	18.52	18.69	18.55	2
		100	0	18.53	18.65	18.50	2
20M	64QAM	1	0	18.56	18.60	18.59	2
		1	50	18.48	18.68	18.53	2
		1	99	18.51	18.60	18.53	2
		50	0	17.46	17.70	17.54	3
		50	25	17.54	17.67	17.55	3
		50	50	17.56	17.66	17.54	3
		100	0	17.56	17.69	17.52	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	20.55	20.70	20.51	0
		1	37	20.55	20.60	20.58	0
		1	74	20.56	20.61	20.52	0
		36	0	19.50	19.65	19.46	1
		36	19	19.47	19.56	19.47	1
		36	39	19.48	19.57	19.54	1
		75	0	19.52	19.67	19.48	1
15M	16QAM	1	0	19.56	19.64	19.54	1
		1	37	19.53	19.62	19.57	1
		1	74	19.54	19.62	19.50	1
		36	0	18.52	18.68	18.49	2
		36	19	18.51	18.64	18.56	2
		36	39	18.48	18.63	18.50	2
		75	0	18.49	18.60	18.54	2
15M	64QAM	1	0	18.56	18.63	18.55	2
		1	37	18.51	18.62	18.52	2
		1	74	18.56	18.61	18.55	2
		36	0	17.50	17.62	17.51	3
		36	19	17.46	17.67	17.50	3
		36	39	17.56	17.70	17.56	3
		75	0	17.50	17.61	17.56	3

LTE Conducted Power (Reduction)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	20.56	20.61	20.51	0
		1	24	20.51	20.64	20.56	0
		1	49	20.55	20.65	20.50	0
		25	0	19.51	19.56	19.46	1
		25	12	19.50	19.62	19.51	1
		25	25	19.42	19.63	19.49	1
		50	0	19.53	19.58	19.48	1
10M	16QAM	1	0	19.48	19.66	19.56	1
		1	24	19.51	19.70	19.58	1
		1	49	19.46	19.70	19.55	1
		25	0	18.51	18.70	18.56	2
		25	12	18.56	18.70	18.54	2
		25	25	18.51	18.63	18.49	2
		50	0	18.52	18.60	18.52	2
10M	64QAM	1	0	18.48	18.60	18.53	2
		1	24	18.55	18.60	18.53	2
		1	49	18.54	18.63	18.53	2
		25	0	17.49	17.62	17.50	3
		25	12	17.55	17.63	17.55	3
		25	25	17.53	17.65	17.51	3
		50	0	17.54	17.69	17.49	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	20.54	20.62	20.59	0
		1	12	20.50	20.66	20.49	0
		1	24	20.52	20.69	20.55	0
		12	0	19.49	19.57	19.54	1
		12	6	19.48	19.58	19.49	1
		12	13	19.41	19.55	19.52	1
		25	0	19.51	19.59	19.56	1
5M	16QAM	1	0	19.53	19.65	19.50	1
		1	12	19.52	19.68	19.50	1
		1	24	19.48	19.62	19.55	1
		12	0	18.47	18.63	18.55	2
		12	6	18.53	18.62	18.49	2
		12	13	18.53	18.65	18.53	2
		25	0	18.49	18.65	18.53	2
5M	64QAM	1	0	18.54	18.62	18.58	2
		1	12	18.51	18.61	18.58	2
		1	24	18.51	18.64	18.56	2
		12	0	17.52	17.66	17.59	3
		12	6	17.56	17.62	17.59	3
		12	13	17.55	17.62	17.51	3
		25	0	17.52	17.66	17.54	3

LTE Conducted Power (Reduction)

LTE Band 66

BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	20.55	20.62	20.57	0
		1	7	20.53	20.60	20.56	0
		1	14	20.55	20.69	20.50	0
		8	0	19.50	19.57	19.52	1
		8	3	19.50	19.64	19.50	1
		8	7	19.45	19.58	19.46	1
		15	0	19.52	19.59	19.54	1
3M	16QAM	1	0	19.46	19.61	19.51	1
		1	7	19.46	19.65	19.58	1
		1	14	19.46	19.70	19.59	1
		8	0	18.47	18.69	18.52	2
		8	3	18.53	18.70	18.57	2
		8	7	18.55	18.64	18.53	2
		15	0	18.56	18.67	18.58	2
3M	64QAM	1	0	18.55	18.62	18.53	2
		1	7	18.48	18.68	18.59	2
		1	14	18.55	18.65	18.50	2
		8	0	17.49	17.65	17.57	3
		8	3	17.54	17.65	17.59	3
		8	7	17.50	17.68	17.54	3
		15	0	17.46	17.65	17.54	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	20.56	20.67	20.50	0
		1	2	20.50	20.66	20.58	0
		1	5	20.53	20.61	20.50	0
		3	0	20.51	20.69	20.55	0
		3	1	20.52	20.65	20.53	0
		3	3	20.48	20.64	20.56	0
		6	0	19.56	19.65	19.51	1
1.4M	16QAM	1	0	19.56	19.69	19.58	1
		1	2	19.53	19.67	19.58	1
		1	5	19.53	19.61	19.54	1
		3	0	18.47	18.63	18.52	1
		3	1	18.47	18.66	18.49	1
		3	3	18.56	18.69	18.53	1
		6	0	18.48	18.69	18.50	2
1.4M	64QAM	1	0	18.53	18.65	18.52	2
		1	2	18.47	18.66	18.59	2
		1	5	18.51	18.64	18.49	2
		3	0	17.49	17.63	17.54	2
		3	1	17.56	17.60	17.57	2
		3	3	17.49	17.60	17.49	2
		6	0	17.55	17.69	17.57	3

LTE Conducted Power (Reduction)

LTE Band 71

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	23.65	23.69	23.64	0
		1	50	23.60	23.56	23.52	0
		1	99	23.60	23.59	23.52	0
		50	0	22.60	22.64	22.59	1
		50	25	22.48	22.52	22.47	1
		50	50	22.46	22.51	22.51	1
		100	0	22.62	22.66	22.61	1
20M	16QAM	1	0	22.53	22.64	22.56	1
		1	50	22.52	22.63	22.52	1
		1	99	22.59	22.63	22.52	1
		50	0	21.50	21.55	21.57	2
		50	25	21.59	21.57	21.50	2
		50	50	21.55	21.59	21.51	2
		100	0	21.56	21.56	21.55	2
20M	64QAM	1	0	21.58	21.63	21.58	2
		1	50	21.56	21.64	21.54	2
		1	99	21.54	21.62	21.54	2
		50	0	20.58	20.57	20.51	3
		50	25	20.56	20.63	20.49	3
		50	50	20.60	20.61	20.52	3
		100	0	20.60	20.63	20.53	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	23.59	23.57	23.56	0
		1	37	23.58	23.58	23.59	0
		1	74	23.50	23.57	23.53	0
		36	0	22.54	22.52	22.51	1
		36	19	22.45	22.50	22.47	1
		36	39	22.54	22.56	22.53	1
		75	0	22.56	22.54	22.53	1
15M	16QAM	1	0	22.51	22.62	22.57	1
		1	37	22.52	22.60	22.56	1
		1	74	22.56	22.62	22.53	1
		36	0	21.51	21.61	21.54	2
		36	19	21.54	21.55	21.52	2
		36	39	21.53	21.59	21.52	2
		75	0	21.52	21.61	21.54	2
15M	64QAM	1	0	21.57	21.62	21.55	2
		1	37	21.50	21.55	21.57	2
		1	74	21.59	21.55	21.49	2
		36	0	20.52	20.63	20.49	3
		36	19	20.56	20.57	20.53	3
		36	39	20.59	20.57	20.58	3
		75	0	20.56	20.62	20.55	3

LTE Conducted Power (Reduction)

LTE Band 71

BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	23.51	23.62	23.49	0
		1	24	23.55	23.62	23.52	0
		1	49	23.52	23.56	23.56	0
		25	0	22.46	22.57	22.44	1
		25	12	22.45	22.52	22.48	1
		25	25	22.49	22.59	22.52	1
		50	0	22.48	22.59	22.46	1
10M	16QAM	1	0	22.59	22.62	22.59	1
		1	24	22.58	22.64	22.50	1
		1	49	22.55	22.61	22.51	1
		25	0	21.57	21.55	21.53	2
		25	12	21.53	21.56	21.58	2
		25	25	21.55	21.55	21.59	2
		50	0	21.51	21.55	21.56	2
10M	64QAM	1	0	21.57	21.61	21.49	2
		1	24	21.50	21.63	21.55	2
		1	49	21.54	21.63	21.52	2
		25	0	20.58	20.57	20.55	3
		25	12	20.53	20.56	20.54	3
		25	25	20.50	20.64	20.52	3
		50	0	20.55	20.56	20.52	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	23.53	23.59	23.50	0
		1	12	23.55	23.61	23.52	0
		1	24	23.55	23.63	23.58	0
		12	0	22.48	22.54	22.45	1
		12	6	22.45	22.58	22.52	1
		12	13	22.50	22.53	22.47	1
		25	0	22.50	22.56	22.47	1
5M	16QAM	1	0	22.58	22.64	22.52	1
		1	12	22.56	22.60	22.57	1
		1	24	22.54	22.64	22.59	1
		12	0	21.54	21.62	21.56	2
		12	6	21.54	21.56	21.57	2
		12	13	21.53	21.63	21.58	2
		25	0	21.55	21.59	21.53	2
5M	64QAM	1	0	21.50	21.63	21.52	2
		1	12	21.52	21.57	21.50	2
		1	24	21.51	21.57	21.54	2
		12	0	20.55	20.63	20.56	3
		12	6	20.58	20.60	20.57	3
		12	13	20.53	20.64	20.54	3
		25	0	20.50	20.63	20.51	3

Uplink Carrier Aggregation Scenarios Conducted Power_Full

Configure	Combination	PCC							SCC							Measurement Power			
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)
																			Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	25.5	24.04	0-8.5	17.57
					1	49						1	0			25.5	23.97	0	23.66
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	25.5	24.11	0-8.5	17.43
					1	49						1	0			25.5	23.99	0	23.62
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	25.5	24.09	0-8.5	17.52
					1	49						1	0			25.5	24	0	23.54
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	24.5	23.19	0-8.5	16.35
					1	99						1	0			24.5	23.11	0	22.62
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	24.5	23.37	0-8.5	16.42
					1	99						1	0			24.5	23.27	0	22.53
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	24.5	23.31	0-8.5	16.38
					1	99						1	0			24.5	23.22	0	22.58
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	24.5	22.81	0-8.5	16.37
					1	99						1	0			24.5	22.76	0	22.61
		41	20	QPSK	1	0	39790	2510	41	20	QPSK	1	99	39988	2529.8	24.5	22.84	0-8.5	16.37
					1	99						1	0			24.5	22.74	0	22.61
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	24.5	22.83	0-8.5	16.42
					1	99						1	0			24.5	22.74	0	22.60
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	24.5	23.07	0-8.5	16.47
					1	99						1	0			24.5	22.12	0	22.63
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	22	21.96	0-8.5	13.53
					1	99						1	0			22	21.88	0	20.54
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	22	21.37	0-8.5	13.53
					1	99						1	0			22	21.32	0	20.51
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	22	21.89	0-8.5	13.62
					1	99						1	0			22	21.8	0	20.48

Uplink Carrier Aggregation Scenarios Conducted Power_Reduction

Configure	Combination	PCC							SCC							Measurement Power			
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)
																			Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	99	20549	838.9	20.0	18.62	0-8.5	12.07
					1	49						1	0			20.0	18.56	0	18.16
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	99	20575	841.5	20.0	18.81	0-8.5	11.93
					1	49						1	0			20.0	18.69	0	18.12
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	99	20600	844	20.0	18.69	0-8.5	12.02
					1	49						1	0			20.0	18.59	0	18.04
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	19	18.72	0-8.5	10.85
					1	99						1	0			19	18.58	0	17.12
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	19	18.89	0-8.5	10.92
					1	99						1	0			19	18.79	0	17.03
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	19	18.82	0-8.5	10.88
					1	99						1	0			19	18.7	0	17.13
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	20	18.77	0-8.5	11.87
					1	99						1	0			20	18.7	0	18.11
		41	20	QPSK	1	0	39790	2510	41	20	QPSK	1	99	39988	2529.8	20	18.78	0-8.5	11.87
					1	99						1	0			20	18.71	0	18.11
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	20	18.83	0-8.5	11.92
					1	99						1	0			20	18.74	0	18.10
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	20	19.13	0-8.5	11.97
					1	99						1	0			20	18.98	0	18.13
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	15	14.95	0-8.5	7.24
					1	99						1	0			15	14.87	0	14.10
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	15	14.41	0-8.5	7.20
					1	99						1	0			15	14.31	0	14.03
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	15	14.92	0-8.5	7.15
					1	99						1	0			15	14.81	0	13.99

Conducted Power (NB mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.45
	6	2437	15.46
	11	2462	15.43
	12	2467	15.39
	13	2472	15.43
802.11g	1	2412	15.32
	6	2437	15.33
	11	2462	15.35
	12	2467	15.33
	13	2472	15.32
802.11n HT20	1	2412	15.36
	6	2437	15.38
	11	2462	15.29
	12	2467	15.28
	13	2472	15.27
802.11n HT40	3	2422	15.38
	6	2437	15.39
	9	2452	15.38
	10	2457	15.35
	11	2462	15.34
802.11ax HE20	1	2412	15.36
	6	2437	15.39
	11	2462	15.29
	12	2467	15.28
	13	2472	15.27
802.11ax HE40	3	2422	15.29
	6	2437	15.37
	9	2452	15.33
	10	2457	15.28
	11	2462	15.27
802.11be EHT20	1	2412	15.38
	6	2437	15.29
	11	2462	15.31
	12	2467	15.26
	13	2472	15.26
802.11be EHT40	3	2422	15.37
	6	2437	15.33
	9	2452	15.36
	10	2457	15.28
	11	2462	15.27

Conducted Power (NB mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	15.43
	6	2437	15.47
	11	2462	15.46
	12	2467	15.41
	13	2472	15.38
802.11g	1	2412	15.39
	6	2437	15.36
	11	2462	15.38
	12	2467	14.37
	13	2472	15.37
802.11n HT20	1	2412	15.33
	6	2437	15.35
	11	2462	15.39
	12	2467	15.33
	13	2472	15.32
802.11n HT40	3	2422	15.33
	6	2437	15.31
	9	2452	15.32
	10	2457	15.3
	11	2462	15.29
802.11ax HE20	1	2412	15.29
	6	2437	15.37
	11	2462	15.32
	12	2467	15.25
	13	2472	15.24
802.11ax HE40	3	2422	15.37
	6	2437	15.38
	9	2452	15.31
	10	2457	15.3
	11	2462	15.29
802.11be EHT20	1	2412	15.38
	6	2437	15.29
	11	2462	15.38
	12	2467	15.35
	13	2472	15.34
802.11be EHT40	3	2422	15.37
	6	2437	15.38
	9	2452	15.31
	10	2457	15.3
	11	2462	15.28

Conducted Power (NB mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	15.43	15.31	18.38
	6	2437	15.46	15.37	18.43
	11	2462	15.45	15.35	18.41
	12	2467	15.44	15.35	18.41
	13	2472	15.43	15.34	18.40
802.11g	1	2412	15.32	15.31	18.33
	6	2437	15.35	15.29	18.33
	11	2462	15.29	15.31	18.31
	12	2467	15.26	15.29	18.29
	13	2472	15.24	15.27	18.27
802.11n HT20	1	2412	15.33	15.38	18.37
	6	2437	15.32	15.31	18.33
	11	2462	15.31	15.33	18.33
	12	2467	15.3	15.3	18.31
	13	2472	15.28	15.28	18.29
802.11n HT40	3	2422	15.33	15.31	18.33
	6	2437	15.31	15.37	18.35
	9	2452	15.39	15.32	18.37
	10	2457	15.35	15.29	18.33
	11	2462	15.33	15.28	18.32
802.11ax HE20	1	2412	15.33	15.36	18.36
	6	2437	15.36	15.31	18.35
	11	2462	15.37	15.35	18.37
	12	2467	15.35	15.35	18.36
	13	2472	15.34	15.33	18.35
802.11ax HE40	3	2422	15.33	15.35	18.35
	6	2437	15.36	15.36	18.37
	9	2452	15.31	15.29	18.31
	10	2457	15.29	15.28	18.30
	11	2462	15.28	15.27	18.29
802.11be EHT20	1	2412	15.37	15.32	18.36
	6	2437	15.32	15.36	18.35
	11	2462	15.39	15.37	18.39
	12	2467	15.38	15.35	18.38
	13	2472	15.37	15.34	18.37
802.11be EHT40	3	2422	15.32	15.38	18.36
	6	2437	15.33	15.35	18.35
	9	2452	15.31	15.32	18.33
	10	2457	15.3	15.3	18.31
	11	2462	15.29	15.31	18.31

Conducted Power (NB mode)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	11.39
	39	2441	11.31
	78	2480	11.38
LE	0	2402	9.7
	19	2440	9.68
	39	2480	9.59

Conducted Power (NB mode)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	14.33
	40	5200	14.31
	44	5220	14.29
	48	5240	14.29
802.11n HT20	36	5180	14.35
	40	5200	14.27
	44	5220	14.36
	48	5240	14.29
802.11n HT40	38	5190	14.28
	46	5230	14.31
802.11ac VHT20	36	5180	14.28
	40	5200	14.35
	44	5220	14.28
	48	5240	14.29
802.11ac VHT40	38	5190	14.29
	46	5230	14.29
802.11ac VHT80	42	5210	14.41
802.11ax HE20	36	5180	14.32
	40	5200	14.33
	44	5220	14.27
	48	5240	14.32
802.11ax HE40	38	5190	14.25
	46	5230	14.26
802.11ax HE80	42	5210	14.27
802.11be EHT20	36	5180	14.32
	40	5200	14.29
	44	5220	14.28
	48	5240	14.25
802.11be EHT40	38	5190	14.28
	46	5230	14.28
802.11be EHT80	42	5210	14.25

Conducted Power (NB mode)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	14.31
	40	5200	14.31
	44	5220	14.28
	48	5240	14.31
802.11n HT20	36	5180	14.33
	40	5200	14.26
	44	5220	14.33
	48	5240	14.33
802.11n HT40	38	5190	14.35
	46	5230	14.31
802.11ac VHT20	36	5180	14.32
	40	5200	14.35
	44	5220	14.35
	48	5240	14.35
802.11ac VHT40	38	5190	14.26
	46	5230	14.26
802.11ac VHT80	42	5210	14.39
802.11ax HE20	36	5180	14.35
	40	5200	14.25
	44	5220	14.33
	48	5240	14.29
802.11ax HE40	38	5190	14.29
	46	5230	14.32
802.11ax HE80	42	5210	14.31
802.11be EHT20	36	5180	14.32
	40	5200	14.33
	44	5220	14.36
	48	5240	14.26
802.11be EHT40	38	5190	14.26
	46	5230	14.33
802.11be EHT80	42	5210	14.33

Conducted Power (NB mode)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	14.33	14.22	17.29
	40	5200	14.32	14.27	17.31
	44	5220	14.33	14.26	17.31
	48	5240	14.29	14.31	17.31
802.11n HT20	36	5180	14.33	14.31	17.33
	40	5200	14.28	14.28	17.29
	44	5220	14.26	14.27	17.28
	48	5240	14.29	14.33	17.32
802.11n HT40	38	5190	14.28	14.32	17.31
	46	5230	14.35	14.31	17.34
802.11ac VHT20	36	5180	14.29	14.31	17.31
	40	5200	14.31	14.35	17.34
	44	5220	14.32	14.35	17.35
	48	5240	14.28	14.32	17.31
802.11ac VHT40	38	5190	14.25	14.28	17.28
	46	5230	14.36	14.33	17.36
802.11ac VHT80	42	5210	14.32	14.32	17.33
802.11ax HE20	36	5180	14.35	14.29	17.33
	40	5200	14.28	14.26	17.28
	44	5220	14.27	14.29	17.29
	48	5240	14.33	14.26	17.31
802.11ax HE40	38	5190	14.26	14.33	17.31
	46	5230	14.27	14.32	17.31
802.11ax HE80	42	5210	14.27	14.36	17.33
802.11be EHT20	36	5180	14.32	14.35	17.35
	40	5200	14.29	14.31	17.31
	44	5220	14.27	14.33	17.31
	48	5240	14.25	14.31	17.29
802.11be EHT40	38	5190	14.32	14.32	17.33
	46	5230	14.32	14.31	17.33
802.11be EHT80	42	5210	14.35	14.32	17.35

Conducted Power (NB mode)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	14.32
	56	5280	14.33
	60	5300	14.26
	64	5320	14.26
802.11n HT20	52	5260	14.35
	56	5280	14.31
	60	5300	14.31
	64	5320	14.32
802.11n HT40	54	5270	14.26
	62	5310	14.32
802.11ac VHT20	52	5260	14.27
	56	5280	14.33
	60	5300	14.29
	64	5320	14.31
802.11ac VHT40	54	5270	14.32
	62	5310	14.32
802.11ac VHT80	58	5290	14.31
802.11ac VHT160	50	5250	14.43
802.11ax HE20	52	5260	14.35
	56	5280	14.38
	60	5300	14.31
	64	5320	14.26
802.11ax HE40	54	5270	14.29
	62	5310	14.32
802.11ax HE80	58	5290	14.4
802.11ax HE160	50	5250	14.37
802.11be EHT20	52	5260	14.33
	56	5280	14.35
	60	5300	14.27
	64	5320	14.23
802.11be EHT40	54	5270	14.29
	62	5310	14.31
802.11be EHT80	58	5290	14.34
802.11be EHT160	50	5250	14.36

Conducted Power (NB mode)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	14.26
	56	5280	14.33
	60	5300	14.29
	64	5320	14.26
802.11n HT20	52	5260	14.33
	56	5280	14.28
	60	5300	14.26
	64	5320	14.31
802.11n HT40	54	5270	14.26
	62	5310	14.27
802.11ac VHT20	52	5260	14.26
	56	5280	14.36
	60	5300	14.31
	64	5320	14.35
802.11ac VHT40	54	5270	14.28
	62	5310	14.35
802.11ac VHT80	58	5290	14.35
802.11ac VHT160	50	5250	14.47
802.11ax HE20	52	5260	14.38
	56	5280	14.41
	60	5300	14.35
	64	5320	14.37
802.11ax HE40	54	5270	14.29
	62	5310	14.33
802.11ax HE80	58	5290	14.38
802.11ax HE160	50	5250	14.42
802.11be EHT20	52	5260	14.36
	56	5280	14.31
	60	5300	14.34
	64	5320	14.28
802.11be EHT40	54	5270	14.35
	62	5310	14.37
802.11be EHT80	58	5290	14.41
802.11be EHT160	50	5250	14.36

Conducted Power (NB mode)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	14.32	14.31	17.33
	56	5280	14.36	14.31	17.35
	60	5300	14.26	14.35	17.32
	64	5320	14.31	14.31	17.32
802.11n HT20	52	5260	14.33	14.27	17.31
	56	5280	14.32	14.32	17.33
	60	5300	14.27	14.25	17.27
	64	5320	14.27	14.33	17.31
802.11n HT40	54	5270	14.29	14.31	17.31
	62	5310	14.25	14.35	17.31
802.11ac VHT20	52	5260	14.32	14.28	17.31
	56	5280	14.26	14.33	17.31
	60	5300	14.25	14.27	17.27
	64	5320	14.35	14.35	17.36
802.11ac VHT40	54	5270	14.32	14.32	17.33
	62	5310	14.27	14.25	17.27
802.11ac VHT80	58	5290	14.28	14.25	17.28
802.11ac VHT160	50	5250	14.41	14.35	17.39
802.11ax HE20	52	5260	14.32	14.22	17.28
	56	5280	14.33	14.31	17.33
	60	5300	14.25	14.26	17.27
	64	5320	14.35	14.25	17.31
802.11ax HE40	54	5270	14.25	14.26	17.27
	62	5310	14.31	14.28	17.31
802.11ax HE80	58	5290	14.31	14.23	17.28
802.11ax HE160	50	5250	14.33	14.28	17.32
802.11be EHT20	52	5260	14.33	14.31	17.33
	56	5280	14.31	14.32	17.33
	60	5300	14.32	14.35	17.35
	64	5320	14.28	14.32	17.31
802.11be EHT40	54	5270	14.31	14.23	17.28
	62	5310	14.32	14.28	17.31
802.11be EHT80	58	5290	14.26	14.27	17.28
802.11be EHT160	50	5250	14.35	14.27	17.32

Conducted Power (NB mode)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	13.83
	116	5580	13.76
	120	5600	13.82
	124	5620	13.81
	132	5660	13.83
	140	5700	13.76
	144	5720	13.79
802.11n HT20	100	5500	13.77
	116	5580	13.82
	120	5600	13.83
	124	5620	13.82
	132	5660	13.85
	140	5700	13.79
	144	5720	13.78
802.11n HT40	102	5510	13.81
	110	5550	13.76
	118	5590	13.83
	126	5630	13.81
	134	5670	13.83
802.11ac VHT20	142	5710	13.82
	100	5500	13.78
	116	5580	13.81
	120	5600	13.83
	124	5620	13.83
	132	5660	13.77
	140	5700	13.82
802.11ac VHT40	144	5720	13.78
	102	5510	13.81
	110	5550	13.83
	118	5590	13.78
	126	5630	13.78
802.11ac VHT80	134	5670	13.75
	142	5710	13.85
	106	5530	13.89
802.11ac VHT160	122	5610	13.85
	138	5690	13.82
802.11ax HE20	114	5570	13.9
	100	5500	13.75
	116	5580	13.75
	120	5600	13.82
	124	5620	13.75
	132	5660	13.79
	140	5700	13.79
802.11ax HE40	144	5720	13.85
	102	5510	13.82
	110	5550	13.79
	118	5590	13.76
	126	5630	13.79
802.11ax HE80	134	5670	13.77
	142	5710	13.83
	106	5530	13.85
802.11ax HE160	122	5610	13.83
	138	5690	13.81
802.11be EHT20	114	5570	13.75
	100	5500	13.75
	116	5580	13.82
	120	5600	13.76
	124	5620	13.79
	132	5660	13.79
	140	5700	13.78
802.11be EHT40	144	5720	13.85
	102	5510	13.76
	110	5550	13.82
	118	5590	13.75
	126	5630	13.78
802.11be EHT80	134	5670	13.76
	142	5710	13.82
	106	5530	13.8
802.11be EHT160	122	5610	13.76
	138	5690	13.83

Conducted Power (NB mode)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	13.82
	116	5580	13.75
	120	5600	13.79
	124	5620	13.79
	132	5660	13.79
	140	5700	13.83
	144	5720	13.78
802.11n HT20	100	5500	13.75
	116	5580	13.83
	120	5600	13.76
	124	5620	13.79
	132	5660	13.81
	140	5700	13.85
	144	5720	13.83
802.11n HT40	102	5510	13.79
	110	5550	13.83
	118	5590	13.86
	126	5630	13.87
	134	5670	13.78
	142	5710	13.84
802.11ac VHT20	100	5500	13.78
	116	5580	13.81
	120	5600	13.83
	124	5620	13.78
	132	5660	13.85
	140	5700	13.85
	144	5720	13.79
802.11ac VHT40	102	5510	13.79
	110	5550	13.81
	118	5590	13.85
	126	5630	13.79
	134	5670	13.83
	142	5710	13.82
802.11ac VHT80	106	5530	13.92
	122	5610	13.91
	138	5690	13.88
802.11ac VHT160	114	5570	13.94
802.11ax HE20	100	5500	13.85
	116	5580	13.8
	120	5600	13.75
	124	5620	13.83
	132	5660	13.76
	140	5700	13.82
	144	5720	13.79
802.11ax HE40	102	5510	13.78
	110	5550	13.81
	118	5590	13.82
	126	5630	13.83
	134	5670	13.83
	142	5710	13.81
802.11ax HE80	106	5530	13.82
	122	5610	13.76
	138	5690	13.82
802.11ax HE160	114	5570	13.75
802.11be EHT20	100	5500	13.79
	116	5580	13.78
	120	5600	13.81
	124	5620	13.83
	132	5660	13.77
	140	5700	13.85
	144	5720	13.82
802.11be EHT40	102	5510	13.81
	110	5550	13.84
	118	5590	13.75
	126	5630	13.85
	134	5670	13.81
	142	5710	13.85
802.11be EHT80	106	5530	13.79
	122	5610	13.82
	138	5690	13.78
802.11be EHT160	114	5570	13.79

Conducted Power (NB mode)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	13.79	13.83	16.82
	116	5580	13.75	13.77	16.77
	120	5600	13.75	13.79	16.78
	124	5620	13.76	13.75	16.77
	132	5660	13.79	13.83	16.82
	140	5700	13.8	13.79	16.81
	144	5720	13.76	13.79	16.79
802.11n HT20	100	5500	13.78	13.75	16.78
	116	5580	13.82	13.79	16.82
	120	5600	13.77	13.8	16.8
	124	5620	13.79	13.75	16.78
	132	5660	13.75	13.85	16.81
	140	5700	13.85	13.85	16.86
	144	5720	13.8	13.82	16.82
802.11n HT40	102	5510	13.82	13.79	16.82
	110	5550	13.75	13.81	16.79
	118	5590	13.8	13.77	16.8
	126	5630	13.81	13.83	16.83
	134	5670	13.8	13.77	16.8
	142	5710	13.78	13.76	16.78
	100	5500	13.8	13.81	16.82
802.11ac VHT20	116	5580	13.82	13.83	16.84
	120	5600	13.85	13.82	16.85
	124	5620	13.76	13.8	16.79
	132	5660	13.82	13.82	16.83
	140	5700	13.76	13.77	16.78
	144	5720	13.77	13.76	16.78
	102	5510	13.75	13.76	16.77
802.11ac VHT40	110	5550	13.83	13.84	16.85
	118	5590	13.79	13.75	16.78
	126	5630	13.82	13.78	16.81
	134	5670	13.85	13.84	16.86
	142	5710	13.83	13.85	16.85
	106	5530	13.96	13.89	16.94
	122	5610	13.92	13.88	16.91
802.11ac VHT80	138	5690	13.89	13.85	16.88
802.11ac VHT160	114	5570	13.98	13.92	16.96
802.11ax HE20	100	5500	13.84	13.8	16.83
	116	5580	13.8	13.85	16.84
	120	5600	13.81	13.8	16.82
	124	5620	13.79	13.81	16.81
	132	5660	13.79	13.84	16.83
	140	5700	13.76	13.78	16.78
	144	5720	13.85	13.79	16.83
802.11ax HE40	102	5510	13.79	13.83	16.82
	110	5550	13.82	13.77	16.81
	118	5590	13.75	13.82	16.8
	126	5630	13.8	13.81	16.82
	134	5670	13.81	13.78	16.81
	142	5710	13.85	13.81	16.84
	106	5530	13.85	13.85	16.86
802.11ax HE80	122	5610	13.79	13.84	16.83
	138	5690	13.83	13.84	16.85
	114	5570	13.85	13.85	16.86
802.11ax HE160	100	5500	13.78	13.8	16.8
802.11be EHT20	116	5580	13.76	13.77	16.78
	120	5600	13.84	13.84	16.85
	124	5620	13.8	13.81	16.82
	132	5660	13.8	13.77	16.8
	140	5700	13.83	13.78	16.82
	144	5720	13.78	13.85	16.83
	102	5510	13.82	13.78	16.81
802.11be EHT40	110	5550	13.79	13.77	16.79
	118	5590	13.8	13.84	16.83
	126	5630	13.8	13.76	16.79
	134	5670	13.77	13.76	16.78
	142	5710	13.85	13.8	16.84
	106	5530	13.81	13.76	16.8
	122	5610	13.78	13.82	16.81
802.11be EHT80	138	5690	13.8	13.76	16.79
802.11be EHT160	114	5570	13.78	13.75	16.78

Conducted Power (NB mode)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	13.82
	153	5765	13.79
	157	5785	13.78
	161	5805	13.76
	165	5825	13.85
802.11n HT20	149	5745	13.75
	153	5765	13.83
	157	5785	13.76
	161	5805	13.81
	165	5825	13.75
802.11n HT40	151	5755	13.77
	159	5795	13.85
802.11ac VHT20	149	5745	13.81
	153	5765	13.76
	157	5785	13.76
	161	5805	13.85
	165	5825	13.78
802.11ac VHT40	151	5755	13.85
	159	5795	13.8
802.11ac VHT80	155	5775	13.87
802.11ax HE20	149	5745	13.85
	153	5765	13.8
	157	5785	13.78
	161	5805	13.8
	165	5825	13.85
802.11ax HE40	151	5755	13.79
	159	5795	13.76
802.11ax HE80	155	5775	13.84
802.11be EHT20	149	5745	13.75
	153	5765	13.77
	157	5785	13.77
	161	5805	13.75
	165	5825	13.83
802.11be EHT40	151	5755	13.78
	159	5795	13.76
802.11be EHT80	155	5775	13.78

Conducted Power (NB mode)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	13.83
	153	5765	13.75
	157	5785	13.75
	161	5805	13.77
	165	5825	13.85
802.11n HT20	149	5745	13.79
	153	5765	13.83
	157	5785	13.84
	161	5805	13.75
	165	5825	13.84
802.11n HT40	151	5755	13.82
	159	5795	13.84
802.11ac VHT20	149	5745	13.81
	153	5765	13.79
	157	5785	13.76
	161	5805	13.77
	165	5825	13.85
802.11ac VHT40	151	5755	13.81
	159	5795	13.84
802.11ac VHT80	155	5775	13.96
802.11ax HE20	149	5745	13.78
	153	5765	13.84
	157	5785	13.85
	161	5805	13.82
	165	5825	13.77
802.11ax HE40	151	5755	13.76
	159	5795	13.78
802.11ax HE80	155	5775	13.85
802.11be EHT20	149	5745	13.84
	153	5765	13.82
	157	5785	13.77
	161	5805	13.84
	165	5825	13.8
802.11be EHT40	151	5755	13.79
	159	5795	13.85
802.11be EHT80	155	5775	13.77

Conducted Power (NB mode)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	13.82	13.79	16.82
	153	5765	13.82	13.83	16.84
	157	5785	13.83	13.77	16.81
	161	5805	13.77	13.78	16.79
	165	5825	13.82	13.82	16.83
802.11n HT20	149	5745	13.85	13.84	16.86
	153	5765	13.84	13.78	16.82
	157	5785	13.83	13.82	16.84
	161	5805	13.78	13.8	16.8
	165	5825	13.78	13.76	16.78
802.11n HT40	151	5755	13.82	13.84	16.84
	159	5795	13.81	13.84	16.84
802.11ac VHT20	149	5745	13.85	13.79	16.83
	153	5765	13.76	13.75	16.77
	157	5785	13.85	13.82	16.85
	161	5805	13.78	13.76	16.78
	165	5825	13.85	13.75	16.81
802.11ac VHT40	151	5755	13.79	13.82	16.82
	159	5795	13.81	13.79	16.81
802.11ac VHT80	155	5775	13.93	13.91	16.93
802.11ax HE20	149	5745	13.76	13.77	16.78
	153	5765	13.82	13.83	16.84
	157	5785	13.77	13.79	16.79
	161	5805	13.83	13.85	16.85
	165	5825	13.81	13.81	16.82
802.11ax HE40	151	5755	13.78	13.81	16.81
	159	5795	13.76	13.79	16.79
802.11ax HE80	155	5775	13.79	13.75	16.78
802.11be EHT20	149	5745	13.81	13.77	16.8
	153	5765	13.75	13.84	16.81
	157	5785	13.79	13.85	16.83
	161	5805	13.79	13.79	16.8
	165	5825	13.78	13.79	16.8
802.11be EHT40	151	5755	13.85	13.75	16.81
	159	5795	13.83	13.85	16.85
802.11be EHT80	155	5775	13.75	13.8	16.79

Conducted Power (NB mode)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	13.77
	173	5865	13.85
	177	5885	13.76
802.11n HT20	169	5845	13.77
	173	5865	13.77
	177	5885	13.82
802.11n HT40	167	5835	13.8
	175	5875	13.76
802.11ac VHT20	169	5845	13.78
	173	5865	13.85
	177	5885	13.8
802.11ac VHT40	167	5835	13.75
	175	5875	13.79
802.11ac VHT80	171	5855	13.84
802.11ac VHT160	163	5815	13.93
802.11ax HE20	169	5845	13.78
	173	5865	13.83
	177	5885	13.75
802.11ax HE40	167	5835	13.78
	175	5875	13.77
802.11ax HE80	171	5855	13.78
802.11ax HE160	163	5815	13.85
802.11be EHT20	169	5845	13.8
	173	5865	13.82
	177	5885	13.8
802.11be EHT40	167	5835	13.79
	175	5875	13.83
802.11be EHT80	171	5855	13.77
802.11be EHT160	163	5815	13.75

Conducted Power (NB mode)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	13.78
	173	5865	13.82
	177	5885	13.78
802.11n HT20	169	5845	13.77
	173	5865	13.83
	177	5885	13.78
802.11n HT40	167	5835	13.79
	175	5875	13.76
802.11ac VHT20	169	5845	13.76
	173	5865	13.75
	177	5885	13.8
802.11ac VHT40	167	5835	13.84
	175	5875	13.77
802.11ac VHT80	171	5855	13.83
802.11ac VHT160	163	5815	13.97
802.11ax HE20	169	5845	13.85
	173	5865	13.82
	177	5885	13.85
802.11ax HE40	167	5835	13.85
	175	5875	13.76
802.11ax HE80	171	5855	13.76
802.11ax HE160	163	5815	13.79
802.11be EHT20	169	5845	13.76
	173	5865	13.84
	177	5885	13.81
802.11be EHT40	167	5835	13.78
	175	5875	13.78
802.11be EHT80	171	5855	13.85
802.11be EHT160	163	5815	13.76

Conducted Power (NB mode)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	13.85	13.79	16.83
	173	5865	13.83	13.76	16.81
	177	5885	13.82	13.84	16.84
802.11n HT20	169	5845	13.82	13.81	16.83
	173	5865	13.76	13.84	16.81
	177	5885	13.78	13.76	16.78
802.11n HT40	167	5835	13.83	13.79	16.82
	175	5875	13.79	13.77	16.79
802.11ac VHT20	169	5845	13.8	13.82	16.82
	173	5865	13.84	13.76	16.81
	177	5885	13.85	13.79	16.83
802.11ac VHT40	167	5835	13.82	13.84	16.84
	175	5875	13.77	13.85	16.82
802.11ac VHT80	171	5855	13.77	13.8	16.8
802.11ac VHT160	163	5815	13.88	13.95	16.93
802.11ax HE20	169	5845	13.81	13.75	16.79
	173	5865	13.75	13.82	16.8
	177	5885	13.82	13.8	16.82
802.11ax HE40	167	5835	13.76	13.85	16.82
	175	5875	13.79	13.8	16.81
802.11ax HE80	171	5855	13.79	13.77	16.79
802.11ax HE160	163	5815	13.81	13.84	16.84
802.11be EHT20	169	5845	13.76	13.83	16.81
	173	5865	13.83	13.77	16.81
	177	5885	13.81	13.8	16.82
802.11be EHT40	167	5835	13.84	13.84	16.85
	175	5875	13.78	13.77	16.79
802.11be EHT80	171	5855	13.82	13.76	16.8
802.11be EHT160	163	5815	13.83	13.8	16.83

Conducted Power (NB mode)			
UNII-5 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	13.82
	5	5975	13.78
	9	5995	13.75
	13	6015	13.8
	17	6035	13.81
	21	6055	13.75
	25	6075	13.82
	29	6095	13.84
	33	6115	13.78
	37	6135	13.8
	41	6155	13.84
	45	6175	13.82
	49	6195	13.84
	53	6215	13.79
	57	6235	13.78
	61	6255	13.76
	65	6275	13.78
	69	6295	13.83
	73	6315	13.77
	77	6335	13.79
802.11ax HE20	81	6355	13.78
	85	6375	13.76
	89	6395	13.78
	93	6415	13.31
	1	5955	13.83
	5	5975	13.75
	9	5995	13.8
	13	6015	13.84
	17	6035	13.76
	21	6055	13.81
	25	6075	13.78
	29	6095	13.85
	33	6115	13.84
	37	6135	13.85
	41	6155	13.79
	45	6175	13.82
	49	6195	13.78
	53	6215	13.83
	57	6235	13.84
	61	6255	13.81
802.11ax HE40	65	6275	13.83
	69	6295	13.82
	73	6315	13.83
	77	6335	13.78
	81	6355	13.78
	85	6375	13.85
	89	6395	13.85
	93	6415	13.3
	3	5965	13.78
	11	6005	13.78
802.11ax HE80	19	6045	13.79
	27	6085	13.8
	35	6125	13.81
	43	6165	13.84
	51	6205	13.83
	59	6245	13.78
	67	6285	13.75
	75	6325	13.75
802.11ax HE160	83	6365	13.79
	91	6405	13.84
	7	5985	13.83
	23	6065	13.76
	39	6145	13.84
	55	6225	13.83
	71	6305	13.8
	87	6385	13.84
	15	6025	13.97
	47	6185	13.98
	79	6345	13.56

Conducted Power (NB mode)			
UNII-5 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	1	5955	13.75
	5	5975	13.84
	9	5995	13.84
	13	6015	13.83
	17	6035	13.76
	21	6055	13.79
	25	6075	13.82
	29	6095	13.75
	33	6115	13.75
	37	6135	13.77
	41	6155	13.77
	45	6175	13.83
	49	6195	13.85
	53	6215	13.77
	57	6235	13.76
	61	6255	13.82
	65	6275	13.76
	69	6295	13.84
	73	6315	13.77
	77	6335	13.8
802.11be EHT40	81	6355	13.79
	85	6375	13.8
	89	6395	13.78
	93	6415	13.31
	3	5965	13.77
	11	6005	13.77
	19	6045	13.75
	27	6085	13.78
	35	6125	13.83
	43	6165	13.79
802.11be EHT80	51	6205	13.83
	59	6245	13.75
	67	6285	13.77
	75	6325	13.84
	83	6365	13.8
	91	6405	13.79
802.11be EHT160	7	5985	13.8
	23	6065	13.8
	39	6145	13.82
	55	6225	13.76
	71	6305	13.81
	87	6385	13.85
	15	6025	13.8
	47	6185	13.83
	79	6345	13.84

Conducted Power (NB mode)			
UNII-5 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	13.81
	5	5975	13.8
	9	5995	13.78
	13	6015	13.83
	17	6035	13.84
	21	6055	13.75
	25	6075	13.79
	29	6095	13.76
	33	6115	13.85
	37	6135	13.81
	41	6155	13.82
	45	6175	13.85
	49	6195	13.79
	53	6215	13.75
	57	6235	13.85
	61	6255	13.81
	65	6275	13.82
	69	6295	13.8
	73	6315	13.85
	77	6335	13.75
802.11ax HE20	81	6355	13.76
	85	6375	13.79
	89	6395	13.84
	93	6415	13.33
	1	5955	13.78
	5	5975	13.83
	9	5995	13.77
	13	6015	13.84
	17	6035	13.84
	21	6055	13.75
	25	6075	13.77
	29	6095	13.78
	33	6115	13.82
	37	6135	13.75
	41	6155	13.82
	45	6175	13.79
	49	6195	13.85
	53	6215	13.76
	57	6235	13.82
	61	6255	13.76
802.11ax HE40	65	6275	13.8
	69	6295	13.82
	73	6315	13.77
	77	6335	13.79
	81	6355	13.79
	85	6375	13.83
	89	6395	13.84
	93	6415	13.26
	3	5965	13.77
	11	6005	13.83
	19	6045	13.75
	27	6085	13.79
802.11ax HE80	35	6125	13.76
	43	6165	13.79
	51	6205	13.77
	59	6245	13.81
	67	6285	13.8
802.11ax HE160	75	6325	13.84
	83	6365	13.77
	91	6405	13.8
	7	5985	13.84
	23	6065	13.78
	39	6145	13.81
	55	6225	13.75
	71	6305	13.79
	87	6385	13.79
	15	6025	13.64
	47	6185	13.99
	79	6345	13.78

Conducted Power (NB mode)			
UNII-5 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	1	5955	13.81
	5	5975	13.81
	9	5995	13.81
	13	6015	13.83
	17	6035	13.81
	21	6055	13.75
	25	6075	13.84
	29	6095	13.84
	33	6115	13.83
	37	6135	13.77
	41	6155	13.83
	45	6175	13.85
	49	6195	13.82
	53	6215	13.8
	57	6235	13.77
	61	6255	13.83
	65	6275	13.85
	69	6295	13.82
	73	6315	13.8
	77	6335	13.77
802.11be EHT40	81	6355	13.79
	85	6375	13.78
	89	6395	13.85
	93	6415	13.25
	3	5965	13.78
	11	6005	13.8
	19	6045	13.85
	27	6085	13.78
	35	6125	13.78
	43	6165	13.76
802.11be EHT80	51	6205	13.76
	59	6245	13.8
	67	6285	13.77
	75	6325	13.83
	83	6365	13.85
	91	6405	13.84
802.11be EHT160	7	5985	13.81
	23	6065	13.81
	39	6145	13.77
	55	6225	13.82
	71	6305	13.81
	87	6385	13.77
	15	6025	13.83
	47	6185	13.84
	79	6345	13.85

Conducted Power (NB mode)					
UNII-5 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	13.79	13.81	16.81
	5	5975	13.83	13.78	16.82
	9	5995	13.8	13.82	16.82
	13	6015	13.84	13.8	16.83
	17	6035	13.85	13.75	16.81
	21	6055	13.77	13.83	16.81
	25	6075	13.75	13.76	16.77
	29	6095	13.83	13.85	16.85
	33	6115	13.81	13.83	16.83
	37	6135	13.81	13.81	16.82
	41	6155	13.84	13.79	16.83
	45	6175	13.75	13.75	16.76
	49	6195	13.82	13.77	16.81
	53	6215	13.76	13.83	16.81
	57	6235	13.75	13.75	16.76
	61	6255	13.79	13.84	16.83
	65	6275	13.84	13.77	16.82
	69	6295	13.81	13.84	16.84
	73	6315	13.83	13.8	16.83
	77	6335	13.77	13.85	16.82
802.11ax HE20	81	6355	13.85	13.8	16.84
	85	6375	13.75	13.82	16.8
	89	6395	13.78	13.84	16.82
	93	6415	13.29	13.35	16.33
	1	5955	13.75	13.78	16.78
	5	5975	13.82	13.83	16.84
	9	5995	13.78	13.75	16.78
	13	6015	13.8	13.76	16.79
	17	6035	13.78	13.84	16.82
	21	6055	13.84	13.79	16.83
	25	6075	13.75	13.84	16.81
	29	6095	13.78	13.75	16.78
	33	6115	13.83	13.84	16.85
	37	6135	13.83	13.81	16.83
	41	6155	13.77	13.84	16.82
	45	6175	13.76	13.77	16.78
	49	6195	13.78	13.75	16.78
	53	6215	13.84	13.8	16.83
	57	6235	13.81	13.85	16.84
	61	6255	13.75	13.8	16.79
	65	6275	13.83	13.76	16.81
	69	6295	13.82	13.78	16.81
	73	6315	13.8	13.78	16.8
	77	6335	13.84	13.78	16.82
	81	6355	13.8	13.75	16.79
	85	6375	13.77	13.76	16.78
	89	6395	13.8	13.79	16.81
	93	6415	13.31	13.29	16.31
802.11ax HE40	3	5965	13.76	13.85	16.82
	11	6005	13.84	13.83	16.85
	19	6045	13.82	13.75	16.8
	27	6085	13.8	13.79	16.81
	35	6125	13.85	13.8	16.84
	43	6165	13.77	13.75	16.77
	51	6205	13.76	13.78	16.78
	59	6245	13.77	13.82	16.81
	67	6285	13.84	13.84	16.85
	75	6325	13.81	13.75	16.79
802.11ax HE80	83	6365	13.78	13.82	16.81
	91	6405	13.81	13.83	16.83
	7	5985	13.78	13.79	16.8
	23	6065	13.82	13.82	16.83
	39	6145	13.76	13.8	16.79
802.11ax HE160	55	6225	13.78	13.76	16.78
	71	6305	13.8	13.83	16.83
	87	6385	13.78	13.75	16.78
	15	6025	13.81	13.84	16.84
	47	6185	13.95	13.89	16.93
	79	6345	13.74	13.61	16.69

Conducted Power (NB mode)					
UNII-5 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	1	5955	13.77	13.77	16.78
	5	5975	13.75	13.84	16.81
	9	5995	13.84	13.85	16.86
	13	6015	13.81	13.8	16.82
	17	6035	13.84	13.77	16.82
	21	6055	13.77	13.75	16.77
	25	6075	13.76	13.78	16.78
	29	6095	13.84	13.79	16.83
	33	6115	13.76	13.83	16.81
	37	6135	13.79	13.78	16.8
	41	6155	13.8	13.8	16.81
	45	6175	13.76	13.75	16.77
	49	6195	13.77	13.79	16.79
	53	6215	13.78	13.85	16.83
	57	6235	13.78	13.81	16.81
	61	6255	13.76	13.85	16.82
	65	6275	13.83	13.82	16.84
	69	6295	13.82	13.76	16.8
	73	6315	13.78	13.78	16.79
	77	6335	13.75	13.79	16.78
802.11be EHT40	81	6355	13.76	13.78	16.78
	85	6375	13.82	13.82	16.83
	89	6395	13.83	13.82	16.84
	93	6415	13.29	13.34	16.33
	3	5965	13.82	13.8	16.82
	11	6005	13.84	13.75	16.81
	19	6045	13.83	13.79	16.82
	27	6085	13.85	13.78	16.83
	35	6125	13.81	13.76	16.8
	43	6165	13.78	13.82	16.81
	51	6205	13.84	13.84	16.85
	59	6245	13.8	13.82	16.82
802.11be EHT80	67	6285	13.79	13.82	16.82
	75	6325	13.8	13.84	16.83
	83	6365	13.83	13.82	16.84
	91	6405	13.82	13.77	16.81
	7	5985	13.78	13.83	16.82
	23	6065	13.81	13.83	16.83
802.11be EHT160	39	6145	13.76	13.79	16.79
	55	6225	13.8	13.76	16.79
	71	6305	13.84	13.85	16.86
	87	6385	13.78	13.83	16.82
802.11be EHT160	15	6025	13.83	13.84	16.85
	47	6185	13.78	13.79	16.8
	79	6345	13.76	13.85	16.82

Conducted Power (NB mode)			
UNII-6 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	13.28
	101	6455	13.27
	105	6475	13.29
	109	6495	13.26
	113	6515	13.26
802.11ax HE20	97	6435	13.28
	101	6455	13.34
	105	6475	13.29
	109	6495	13.31
	113	6515	13.3
802.11ax HE40	99	6445	13.28
	107	6485	13.26
	115	6525	13.32
802.11ax HE80	103	6465	13.35
	119	6545	13.33
802.11ax HE160	111	6505	13.46
802.11be EHT20	97	6435	13.31
	101	6455	13.29
	105	6475	13.3
	109	6495	13.26
	113	6515	13.3
802.11be EHT40	99	6445	13.25
	107	6485	13.33
	115	6525	13.31
802.11be EHT80	103	6465	13.33
	119	6545	13.33
802.11be EHT160	111	6505	13.25

Conducted Power (NB mode)			
UNII-6 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	13.32
	101	6455	13.29
	105	6475	13.27
	109	6495	13.34
	113	6515	13.25
802.11ax HE20	97	6435	13.28
	101	6455	13.28
	105	6475	13.25
	109	6495	13.29
	113	6515	13.35
802.11ax HE40	99	6445	13.26
	107	6485	13.32
	115	6525	13.3
802.11ax HE80	103	6465	13.25
	119	6545	13.3
802.11ax HE160	111	6505	13.43
802.11be EHT20	97	6435	13.27
	101	6455	13.26
	105	6475	13.28
	109	6495	13.34
	113	6515	13.26
802.11be EHT40	99	6445	13.27
	107	6485	13.34
	115	6525	13.26
802.11be EHT80	103	6465	13.26
	119	6545	13.32
802.11be EHT160	111	6505	13.29

Conducted Power (NB mode)					
UNII-6 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	13.27	13.26	16.28
	101	6455	13.34	13.27	16.32
	105	6475	13.31	13.35	16.34
	109	6495	13.26	13.35	16.32
	113	6515	13.27	13.29	16.29
802.11ax HE20	97	6435	13.25	13.34	16.31
	101	6455	13.26	13.31	16.3
	105	6475	13.28	13.32	16.31
	109	6495	13.27	13.35	16.32
	113	6515	13.32	13.3	16.32
802.11ax HE40	99	6445	13.27	13.34	16.32
	107	6485	13.3	13.26	16.29
	115	6525	13.31	13.33	16.33
802.11ax HE80	103	6465	13.25	13.29	16.28
	119	6545	13.31	13.3	16.32
802.11ax HE160	111	6505	13.38	13.41	16.41
802.11be EHT20	97	6435	13.31	13.3	16.32
	101	6455	13.3	13.29	16.31
	105	6475	13.25	13.25	16.26
	109	6495	13.25	13.34	16.31
	113	6515	13.26	13.29	16.29
802.11be EHT40	99	6445	13.33	13.31	16.33
	107	6485	13.29	13.34	16.33
	115	6525	13.28	13.25	16.28
802.11be EHT80	103	6465	13.3	13.35	16.34
	119	6545	13.27	13.26	16.28
802.11be EHT160	111	6505	13.33	13.3	16.33

Conducted Power (NB mode)			
UNII-7 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	13.35
	121	6555	13.34
	125	6575	13.25
	129	6595	13.31
	133	6615	13.29
	137	6635	13.26
	141	6655	13.26
	145	6675	13.31
	149	6695	13.34
	153	6715	13.3
	157	6735	13.27
	161	6755	13.33
	165	6775	13.3
	169	6795	13.33
	173	6815	13.35
	177	6835	13.34
802.11ax HE20	181	6855	13.29
	117	6535	13.34
	121	6555	13.35
	125	6575	13.27
	129	6595	13.31
	133	6615	13.3
	137	6635	13.27
	141	6655	13.33
	145	6675	13.27
	149	6695	13.31
	153	6715	13.35
	157	6735	13.32
	161	6755	13.32
	165	6775	13.32
	169	6795	13.25
	173	6815	13.35
802.11ax HE40	177	6835	13.33
	181	6855	13.33
	123	6565	13.29
	131	6605	13.3
	139	6645	13.26
	147	6685	13.27
	155	6725	13.27
	163	6765	13.27
802.11ax HE80	171	6805	13.27
	179	6845	13.35
	187	6885	13.31
	135	6625	13.28
	151	6705	13.33
802.11ax HE160	167	6785	13.25
	183	6865	13.33
	143	6665	13.43
	175	6825	13.45

Conducted Power (NB mode)			
UNII-7 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	117	6535	13.35
	121	6555	13.3
	125	6575	13.32
	129	6595	13.25
	133	6615	13.35
	137	6635	13.25
	141	6655	13.32
	145	6675	13.35
	149	6695	13.32
	153	6715	13.26
	157	6735	13.27
	161	6755	13.3
	165	6775	13.29
	169	6795	13.3
	173	6815	13.25
	177	6835	13.34
802.11be EHT40	181	6855	13.25
	123	6565	13.29
	131	6605	13.3
	139	6645	13.31
	147	6685	13.26
	155	6725	13.3
	163	6765	13.26
	171	6805	13.34
802.11be EHT80	179	6845	13.26
	187	6885	13.29
	135	6625	13.29
	151	6705	13.27
802.11be EHT160	167	6785	13.35
	183	6865	13.35
	143	6665	13.27
	175	6825	13.26

Conducted Power (NB mode)			
UNII-7 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	13.31
	121	6555	13.28
	125	6575	13.26
	129	6595	13.28
	133	6615	13.29
	137	6635	13.29
	141	6655	13.26
	145	6675	13.31
	149	6695	13.27
	153	6715	13.27
	157	6735	13.3
	161	6755	13.35
	165	6775	13.3
	169	6795	13.28
	173	6815	13.34
	177	6835	13.28
	181	6855	13.29
802.11ax HE20	117	6535	13.26
	121	6555	13.33
	125	6575	13.32
	129	6595	13.35
	133	6615	13.28
	137	6635	13.31
	141	6655	13.32
	145	6675	13.26
	149	6695	13.33
	153	6715	13.32
	157	6735	13.3
	161	6755	13.34
	165	6775	13.25
	169	6795	13.27
	173	6815	13.3
	177	6835	13.3
	181	6855	13.3
802.11ax HE40	123	6565	13.34
	131	6605	13.32
	139	6645	13.29
	147	6685	13.28
	155	6725	13.3
	163	6765	13.33
	171	6805	13.33
	179	6845	13.34
802.11ax HE80	187	6885	13.26
	135	6625	13.3
	151	6705	13.3
	167	6785	13.3
802.11ax HE160	183	6865	13.32
	143	6665	13.45
	175	6825	13.46

Conducted Power (NB mode)			
UNII-7 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	117	6535	13.29
	121	6555	13.28
	125	6575	13.32
	129	6595	13.35
	133	6615	13.25
	137	6635	13.26
	141	6655	13.26
	145	6675	13.34
	149	6695	13.29
	153	6715	13.35
	157	6735	13.34
	161	6755	13.25
	165	6775	13.31
	169	6795	13.35
	173	6815	13.25
	177	6835	13.3
802.11be EHT40	181	6855	13.31
	123	6565	13.27
	131	6605	13.25
	139	6645	13.31
	147	6685	13.27
	155	6725	13.29
	163	6765	13.29
	171	6805	13.32
802.11be EHT80	179	6845	13.34
	187	6885	13.29
	135	6625	13.3
	151	6705	13.34
802.11be EHT160	167	6785	13.3
	183	6865	13.28
	143	6665	13.31
	175	6825	13.29

Conducted Power (NB mode)					
UNII-7 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	13.33	13.32	16.34
	121	6555	13.3	13.26	16.29
	125	6575	13.28	13.27	16.29
	129	6595	13.35	13.3	16.34
	133	6615	13.33	13.32	16.34
	137	6635	13.35	13.32	16.35
	141	6655	13.34	13.31	16.34
	145	6675	13.26	13.25	16.27
	149	6695	13.33	13.31	16.33
	153	6715	13.29	13.29	16.3
	157	6735	13.28	13.28	16.29
	161	6755	13.35	13.31	16.34
	165	6775	13.26	13.28	16.28
	169	6795	13.34	13.35	16.36
	173	6815	13.25	13.31	16.29
	177	6835	13.33	13.32	16.34
	181	6855	13.31	13.33	16.33
802.11ax HE20	117	6535	13.33	13.29	16.32
	121	6555	13.28	13.32	16.31
	125	6575	13.27	13.32	16.31
	129	6595	13.33	13.33	16.34
	133	6615	13.34	13.28	16.32
	137	6635	13.31	13.26	16.3
	141	6655	13.34	13.27	16.32
	145	6675	13.26	13.31	16.3
	149	6695	13.27	13.34	16.32
	153	6715	13.32	13.34	16.34
	157	6735	13.32	13.3	16.32
	161	6755	13.3	13.34	16.33
	165	6775	13.28	13.33	16.32
	169	6795	13.35	13.34	16.36
	173	6815	13.25	13.26	16.27
	177	6835	13.28	13.27	16.29
	181	6855	13.25	13.3	16.29
802.11ax HE40	123	6565	13.33	13.31	16.33
	131	6605	13.32	13.28	16.31
	139	6645	13.27	13.28	16.29
	147	6685	13.31	13.29	16.31
	155	6725	13.25	13.26	16.27
	163	6765	13.34	13.32	16.34
	171	6805	13.26	13.33	16.31
	179	6845	13.28	13.28	16.29
802.11ax HE80	187	6885	13.26	13.25	16.27
	135	6625	13.27	13.25	16.27
	151	6705	13.3	13.31	16.32
	167	6785	13.31	13.3	16.32
802.11ax HE160	183	6865	13.25	13.26	16.27
	143	6665	13.33	13.46	16.41
	175	6825	13.41	13.48	16.46

Conducted Power (NB mode)					
UNII-7 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	117	6535	13.27	13.29	16.29
	121	6555	13.33	13.32	16.34
	125	6575	13.35	13.31	16.34
	129	6595	13.27	13.27	16.28
	133	6615	13.35	13.34	16.36
	137	6635	13.32	13.28	16.31
	141	6655	13.28	13.33	16.32
	145	6675	13.3	13.34	16.33
	149	6695	13.29	13.28	16.3
	153	6715	13.26	13.29	16.29
	157	6735	13.28	13.32	16.31
	161	6755	13.35	13.35	16.36
	165	6775	13.26	13.34	16.31
	169	6795	13.31	13.3	16.32
	173	6815	13.26	13.35	16.32
	177	6835	13.35	13.3	16.34
	181	6855	13.33	13.28	16.32
802.11be EHT40	123	6565	13.31	13.32	16.33
	131	6605	13.31	13.3	16.32
	139	6645	13.27	13.34	16.32
	147	6685	13.26	13.26	16.27
	155	6725	13.32	13.34	16.34
	163	6765	13.25	13.34	16.31
	171	6805	13.35	13.26	16.32
	179	6845	13.31	13.3	16.32
802.11be EHT80	187	6885	13.34	13.27	16.32
	135	6625	13.31	13.3	16.32
	151	6705	13.27	13.29	16.29
	167	6785	13.29	13.32	16.32
802.11be EHT160	183	6865	13.3	13.27	16.3
	143	6665	13.33	13.26	16.31
	175	6825	13.25	13.33	16.3

Conducted Power (NB mode)			
UNII-5 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	7.32
	5	5975	7.28
	9	5995	7.25
	13	6015	7.3
	17	6035	7.31
	21	6055	7.25
	25	6075	7.32
	29	6095	7.34
	33	6115	7.28
	37	6135	7.3
	41	6155	7.34
	45	6175	7.32
	49	6195	7.34
	53	6215	7.29
	57	6235	7.28
	61	6255	7.26
	65	6275	7.28
	69	6295	7.33
	73	6315	7.27
	77	6335	7.29
802.11ax HE20	81	6355	7.28
	85	6375	7.26
	89	6395	7.28
	93	6415	6.81
	1	5955	7.33
	5	5975	7.25
	9	5995	7.3
	13	6015	7.34
	17	6035	7.26
	21	6055	7.31
	25	6075	7.28
	29	6095	7.35
	33	6115	7.34
	37	6135	7.35
	41	6155	7.29
	45	6175	7.32
	49	6195	7.28
	53	6215	7.33
	57	6235	7.34
	61	6255	7.31
802.11ax HE40	65	6275	7.33
	69	6295	7.32
	73	6315	7.33
	77	6335	7.28
	81	6355	7.28
	85	6375	7.35
	89	6395	7.35
	93	6415	6.8
	3	5965	9.78
	11	6005	9.78
	19	6045	9.79
	27	6085	9.8
802.11ax HE80	35	6125	9.81
	43	6165	9.84
	51	6205	9.83
	59	6245	9.78
	67	6285	9.75
	75	6325	9.75
802.11ax HE160	83	6365	9.79
	91	6405	9.84
	7	5985	12.83
	23	6065	12.76
	39	6145	12.84
	55	6225	12.83
	71	6305	12.8
	87	6385	12.84
	15	6025	13.95
	47	6185	13.97
	79	6345	13.54

Conducted Power (NB mode)			
UNII-5 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	1	5955	7.25
	5	5975	7.34
	9	5995	7.34
	13	6015	7.33
	17	6035	7.26
	21	6055	7.29
	25	6075	7.32
	29	6095	7.25
	33	6115	7.25
	37	6135	7.27
	41	6155	7.27
	45	6175	7.33
	49	6195	7.35
	53	6215	7.27
	57	6235	7.26
	61	6255	7.32
	65	6275	7.26
	69	6295	7.34
	73	6315	7.27
	77	6335	7.3
802.11be EHT40	81	6355	7.29
	85	6375	7.3
	89	6395	7.28
	93	6415	6.81
	3	5965	9.77
	11	6005	9.77
	19	6045	9.75
	27	6085	9.78
	35	6125	9.83
	43	6165	9.79
802.11be EHT80	51	6205	9.83
	59	6245	9.75
	67	6285	9.77
	75	6325	9.84
	83	6365	9.8
	91	6405	9.79
802.11be EHT160	7	5985	12.8
	23	6065	12.8
	39	6145	12.82
	55	6225	12.76
	71	6305	12.81
	87	6385	12.85
	15	6025	13.8
	47	6185	13.83
	79	6345	13.84

Conducted Power (NB mode)			
UNII-5 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	7.31
	5	5975	7.3
	9	5995	7.28
	13	6015	7.33
	17	6035	7.34
	21	6055	7.25
	25	6075	7.29
	29	6095	7.26
	33	6115	7.35
	37	6135	7.31
	41	6155	7.32
	45	6175	7.35
	49	6195	7.29
	53	6215	7.25
	57	6235	7.35
	61	6255	7.31
	65	6275	7.32
	69	6295	7.3
	73	6315	7.35
	77	6335	7.25
802.11ax HE20	81	6355	7.26
	85	6375	7.29
	89	6395	7.34
	93	6415	6.83
	1	5955	7.28
	5	5975	7.33
	9	5995	7.27
	13	6015	7.34
	17	6035	7.34
	21	6055	7.25
	25	6075	7.27
	29	6095	7.28
	33	6115	7.32
	37	6135	7.25
	41	6155	7.32
	45	6175	7.29
	49	6195	7.35
	53	6215	7.26
	57	6235	7.32
	61	6255	7.26
802.11ax HE40	65	6275	7.3
	69	6295	7.32
	73	6315	7.27
	77	6335	7.29
	81	6355	7.29
	85	6375	7.33
	89	6395	7.34
	93	6415	6.76
	3	5965	9.77
	11	6005	9.83
	19	6045	9.75
	27	6085	9.79
802.11ax HE80	35	6125	9.76
	43	6165	9.79
	51	6205	9.77
	59	6245	9.81
	67	6285	9.8
	75	6325	9.84
802.11ax HE160	83	6365	9.77
	91	6405	9.8
	7	5985	12.84
	23	6065	12.78
	39	6145	12.81
	55	6225	12.75
	71	6305	12.79
	87	6385	12.79
	15	6025	13.64
	47	6185	13.99
	79	6345	13.78

Conducted Power (NB mode)			
UNII-5 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	1	5955	7.31
	5	5975	7.31
	9	5995	7.31
	13	6015	7.33
	17	6035	7.31
	21	6055	7.25
	25	6075	7.34
	29	6095	7.34
	33	6115	7.33
	37	6135	7.27
	41	6155	7.33
	45	6175	7.35
	49	6195	7.32
	53	6215	7.3
	57	6235	7.27
	61	6255	7.33
	65	6275	7.35
	69	6295	7.32
	73	6315	7.3
	77	6335	7.27
802.11be EHT40	81	6355	7.29
	85	6375	7.28
	89	6395	7.35
	93	6415	6.75
	3	5965	9.78
	11	6005	9.8
	19	6045	9.85
	27	6085	9.78
	35	6125	9.78
	43	6165	9.76
802.11be EHT80	51	6205	9.76
	59	6245	9.8
	67	6285	9.77
	75	6325	9.83
	83	6365	9.85
	91	6405	9.84
802.11be EHT160	7	5985	12.81
	23	6065	12.81
	39	6145	12.77
	55	6225	12.82
	71	6305	12.81
	87	6385	12.77
	15	6025	13.83
	47	6185	13.84
	79	6345	13.85

Conducted Power (NB mode)					
UNII-5 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	1.29	1.31	4.31
	5	5975	1.33	1.28	4.32
	9	5995	1.3	1.32	4.32
	13	6015	1.34	1.3	4.33
	17	6035	1.35	1.25	4.31
	21	6055	1.27	1.33	4.31
	25	6075	1.25	1.26	4.27
	29	6095	1.33	1.35	4.35
	33	6115	1.31	1.33	4.33
	37	6135	1.31	1.31	4.32
	41	6155	1.34	1.29	4.33
	45	6175	1.25	1.25	4.26
	49	6195	1.32	1.27	4.31
	53	6215	1.26	1.33	4.31
	57	6235	1.25	1.25	4.26
	61	6255	1.29	1.34	4.33
	65	6275	1.34	1.27	4.32
	69	6295	1.31	1.34	4.34
	73	6315	1.33	1.3	4.33
	77	6335	1.27	1.35	4.32
	81	6355	1.35	1.3	4.34
	85	6375	1.25	1.32	4.3
	89	6395	1.28	1.34	4.32
	93	6415	0.79	0.85	3.83
802.11ax HE20	1	5955	4.25	4.28	7.28
	5	5975	4.32	4.33	7.34
	9	5995	4.28	4.25	7.28
	13	6015	4.3	4.26	7.29
	17	6035	4.28	4.34	7.32
	21	6055	4.34	4.29	7.33
	25	6075	4.25	4.34	7.31
	29	6095	4.28	4.25	7.28
	33	6115	4.33	4.34	7.35
	37	6135	4.33	4.31	7.33
	41	6155	4.27	4.34	7.32
	45	6175	4.26	4.27	7.28
	49	6195	4.28	4.25	7.28
	53	6215	4.34	4.3	7.33
	57	6235	4.31	4.35	7.34
	61	6255	4.25	4.3	7.29
	65	6275	4.33	4.26	7.31
	69	6295	4.32	4.28	7.31
	73	6315	4.3	4.28	7.3
	77	6335	4.34	4.28	7.32
	81	6355	4.3	4.25	7.29
	85	6375	4.27	4.26	7.28
	89	6395	4.3	4.29	7.31
	93	6415	3.81	3.79	6.81
802.11ax HE40	3	5965	7.26	7.35	10.32
	11	6005	7.34	7.33	10.35
	19	6045	7.32	7.25	10.3
	27	6085	7.3	7.29	10.31
	35	6125	7.35	7.3	10.34
	43	6165	7.27	7.25	10.27
	51	6205	7.26	7.28	10.28
	59	6245	7.27	7.32	10.31
	67	6285	7.34	7.34	10.35
	75	6325	7.31	7.25	10.29
	83	6365	7.28	7.32	10.31
	91	6405	7.31	7.33	10.33
802.11ax HE80	7	5985	10.28	10.29	13.3
	23	6065	10.32	10.32	13.33
	39	6145	10.26	10.3	13.29
	55	6225	10.28	10.26	13.28
	71	6305	10.3	10.33	13.33
802.11ax HE160	87	6385	10.28	10.25	13.28
	15	6025	12.81	12.84	15.84
	47	6185	12.95	12.89	15.93
	79	6345	12.74	12.61	15.69

Conducted Power (NB mode)					
UNII-5 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	1	5955	4.27	4.27	7.28
	5	5975	4.25	4.34	7.31
	9	5995	4.34	4.35	7.36
	13	6015	4.31	4.3	7.32
	17	6035	4.34	4.27	7.32
	21	6055	4.27	4.25	7.27
	25	6075	4.26	4.28	7.28
	29	6095	4.34	4.29	7.33
	33	6115	4.26	4.33	7.31
	37	6135	4.29	4.28	7.3
	41	6155	4.3	4.3	7.31
	45	6175	4.26	4.25	7.27
	49	6195	4.27	4.29	7.29
	53	6215	4.28	4.35	7.33
	57	6235	4.28	4.31	7.31
	61	6255	4.26	4.35	7.32
	65	6275	4.33	4.32	7.34
	69	6295	4.32	4.26	7.3
	73	6315	4.28	4.28	7.29
	77	6335	4.25	4.29	7.28
	81	6355	4.26	4.28	7.28
	85	6375	4.32	4.32	7.33
	89	6395	4.33	4.32	7.34
	93	6415	3.79	3.84	6.83
802.11be EHT40	3	5965	7.32	7.3	10.32
	11	6005	7.34	7.25	10.31
	19	6045	7.33	7.29	10.32
	27	6085	7.35	7.28	10.33
	35	6125	7.31	7.26	10.3
	43	6165	7.28	7.32	10.31
	51	6205	7.34	7.34	10.35
	59	6245	7.3	7.32	10.32
	67	6285	7.29	7.32	10.32
	75	6325	7.3	7.34	10.33
	83	6365	7.33	7.32	10.34
	91	6405	7.32	7.27	10.31
802.11be EHT80	7	5985	10.28	10.33	13.32
	23	6065	10.31	10.33	13.33
	39	6145	10.26	10.29	13.29
	55	6225	10.3	10.26	13.29
	71	6305	10.34	10.35	13.36
	87	6385	10.28	10.33	13.32
802.11be EHT160	15	6025	12.83	12.84	15.85
	47	6185	12.78	12.79	15.8
	79	6345	12.76	12.85	15.82

Conducted Power (NB mode)			
UNII-6 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	7.28
	101	6455	7.27
	105	6475	7.29
	109	6495	7.26
	113	6515	7.26
802.11ax HE20	97	6435	7.28
	101	6455	7.34
	105	6475	7.29
	109	6495	7.31
	113	6515	7.3
802.11ax HE40	99	6445	9.28
	107	6485	9.26
	115	6525	9.32
802.11ax HE80	103	6465	12.85
	119	6545	12.83
802.11ax HE160	111	6505	13.46
802.11be EHT20	97	6435	7.31
	101	6455	7.29
	105	6475	7.3
	109	6495	7.26
	113	6515	7.3
802.11be EHT40	99	6445	9.25
	107	6485	9.33
	115	6525	9.31
802.11be EHT80	103	6465	12.83
	119	6545	12.83
802.11be EHT160	111	6505	13.25

Conducted Power (NB mode)			
UNII-6 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	7.32
	101	6455	7.29
	105	6475	7.27
	109	6495	7.34
	113	6515	7.25
802.11ax HE20	97	6435	7.28
	101	6455	7.28
	105	6475	7.25
	109	6495	7.29
	113	6515	7.35
802.11ax HE40	99	6445	9.26
	107	6485	9.32
	115	6525	9.3
802.11ax HE80	103	6465	12.75
	119	6545	12.8
802.11ax HE160	111	6505	13.43
802.11be EHT20	97	6435	7.27
	101	6455	7.26
	105	6475	7.28
	109	6495	7.34
	113	6515	7.26
802.11be EHT40	99	6445	9.27
	107	6485	9.34
	115	6525	9.26
802.11be EHT80	103	6465	12.76
	119	6545	12.82
802.11be EHT160	111	6505	13.29

Conducted Power (NB mode)					
UNII-6 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	1.77	1.76	4.78
	101	6455	1.84	1.77	4.82
	105	6475	1.81	1.85	4.84
	109	6495	1.76	1.85	4.82
	113	6515	1.77	1.79	4.79
802.11ax HE20	97	6435	4.25	4.34	7.31
	101	6455	4.26	4.31	7.3
	105	6475	4.28	4.32	7.31
	109	6495	4.27	4.35	7.32
	113	6515	4.32	4.3	7.32
802.11ax HE40	99	6445	7.27	7.34	10.32
	107	6485	7.3	7.26	10.29
	115	6525	7.31	7.33	10.33
802.11ax HE80	103	6465	10.25	10.29	13.28
	119	6545	10.31	10.3	13.32
802.11ax HE160	111	6505	12.88	12.91	15.91
802.11be EHT20	97	6435	4.31	4.3	7.32
	101	6455	4.3	4.29	7.31
	105	6475	4.25	4.25	7.26
	109	6495	4.25	4.34	7.31
	113	6515	4.26	4.29	7.29
802.11be EHT40	99	6445	7.33	7.31	10.33
	107	6485	7.29	7.34	10.33
	115	6525	7.28	7.25	10.28
802.11be EHT80	103	6465	10.3	10.35	13.34
	119	6545	10.27	10.26	13.28
802.11be EHT160	111	6505	12.83	12.8	15.83

Conducted Power (NB mode)			
UNII-7 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	7.35
	121	6555	7.34
	125	6575	7.25
	129	6595	7.31
	133	6615	7.29
	137	6635	7.26
	141	6655	7.26
	145	6675	7.31
	149	6695	7.34
	153	6715	7.3
	157	6735	7.27
	161	6755	7.33
	165	6775	7.3
	169	6795	7.33
	173	6815	7.35
	177	6835	7.34
	181	6855	7.29
802.11ax HE20	117	6535	7.34
	121	6555	7.35
	125	6575	7.27
	129	6595	7.31
	133	6615	7.3
	137	6635	7.27
	141	6655	7.33
	145	6675	7.27
	149	6695	7.31
	153	6715	7.35
	157	6735	7.32
	161	6755	7.32
	165	6775	7.32
	169	6795	7.25
	173	6815	7.35
	177	6835	7.33
	181	6855	7.33
802.11ax HE40	123	6565	9.79
	131	6605	9.8
	139	6645	9.76
	147	6685	9.77
	155	6725	9.77
	163	6765	9.77
	171	6805	9.77
	179	6845	9.85
802.11ax HE80	187	6885	9.81
	135	6625	12.78
	151	6705	12.83
	167	6785	12.75
802.11ax HE160	183	6865	12.83
	143	6665	13.43
	175	6825	13.45

Conducted Power (NB mode)			
UNII-7 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	117	6535	7.35
	121	6555	7.3
	125	6575	7.32
	129	6595	7.25
	133	6615	7.35
	137	6635	7.25
	141	6655	7.32
	145	6675	7.35
	149	6695	7.32
	153	6715	7.26
	157	6735	7.27
	161	6755	7.3
	165	6775	7.29
	169	6795	7.3
	173	6815	7.25
	177	6835	7.34
	181	6855	7.25
802.11be EHT40	123	6565	9.79
	131	6605	9.8
	139	6645	9.81
	147	6685	9.76
	155	6725	9.8
	163	6765	9.76
	171	6805	9.84
	179	6845	9.76
802.11be EHT80	187	6885	9.79
	135	6625	12.79
	151	6705	12.77
	167	6785	12.85
802.11be EHT160	183	6865	12.85
	143	6665	13.27
	175	6825	13.26

Conducted Power (NB mode)			
UNII-7 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	7.31
	121	6555	7.28
	125	6575	7.26
	129	6595	7.28
	133	6615	7.29
	137	6635	7.29
	141	6655	7.26
	145	6675	7.31
	149	6695	7.27
	153	6715	7.27
	157	6735	7.3
	161	6755	7.35
	165	6775	7.3
	169	6795	7.28
	173	6815	7.34
	177	6835	7.28
	181	6855	7.29
802.11ax HE20	117	6535	7.26
	121	6555	7.33
	125	6575	7.32
	129	6595	7.35
	133	6615	7.28
	137	6635	7.31
	141	6655	7.32
	145	6675	7.26
	149	6695	7.33
	153	6715	7.32
	157	6735	7.3
	161	6755	7.34
	165	6775	7.25
	169	6795	7.27
	173	6815	7.3
	177	6835	7.3
	181	6855	7.3
802.11ax HE40	123	6565	9.84
	131	6605	9.82
	139	6645	9.79
	147	6685	9.78
	155	6725	9.8
	163	6765	9.83
	171	6805	9.83
	179	6845	9.84
802.11ax HE80	187	6885	9.76
	135	6625	12.8
	151	6705	12.8
	167	6785	12.8
802.11ax HE160	183	6865	12.82
	143	6665	13.45
	175	6825	13.46

Conducted Power (NB mode)			
UNII-7 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	117	6535	7.29
	121	6555	7.28
	125	6575	7.32
	129	6595	7.35
	133	6615	7.25
	137	6635	7.26
	141	6655	7.26
	145	6675	7.34
	149	6695	7.29
	153	6715	7.35
	157	6735	7.34
	161	6755	7.25
	165	6775	7.31
	169	6795	7.35
	173	6815	7.25
	177	6835	7.3
	181	6855	7.31
802.11be EHT40	123	6565	9.77
	131	6605	9.75
	139	6645	9.81
	147	6685	9.77
	155	6725	9.79
	163	6765	9.79
	171	6805	9.82
	179	6845	9.84
802.11be EHT80	187	6885	9.79
	135	6625	12.8
	151	6705	12.84
	167	6785	12.8
802.11be EHT160	183	6865	12.78
	143	6665	13.31
	175	6825	13.29

Conducted Power (NB mode)					
UNII-7 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	1.83	1.82	4.84
	121	6555	1.8	1.76	4.79
	125	6575	1.78	1.77	4.79
	129	6595	1.85	1.8	4.84
	133	6615	1.83	1.82	4.84
	137	6635	1.85	1.82	4.85
	141	6655	1.84	1.81	4.84
	145	6675	1.76	1.75	4.77
	149	6695	1.83	1.81	4.83
	153	6715	1.79	1.79	4.8
	157	6735	1.78	1.78	4.79
	161	6755	1.85	1.81	4.84
	165	6775	1.76	1.78	4.78
	169	6795	1.84	1.85	4.86
	173	6815	1.75	1.81	4.79
	177	6835	1.83	1.82	4.84
	181	6855	1.81	1.83	4.83
802.11ax HE20	117	6535	4.33	4.29	7.32
	121	6555	4.28	4.32	7.31
	125	6575	4.27	4.32	7.31
	129	6595	4.33	4.33	7.34
	133	6615	4.34	4.28	7.32
	137	6635	4.31	4.26	7.3
	141	6655	4.34	4.27	7.32
	145	6675	4.26	4.31	7.3
	149	6695	4.27	4.34	7.32
	153	6715	4.32	4.34	7.34
	157	6735	4.32	4.3	7.32
	161	6755	4.3	4.34	7.33
	165	6775	4.28	4.33	7.32
	169	6795	4.35	4.34	7.36
	173	6815	4.25	4.26	7.27
	177	6835	4.28	4.27	7.29
	181	6855	4.25	4.3	7.29
802.11ax HE40	123	6565	7.33	7.31	10.33
	131	6605	7.32	7.28	10.31
	139	6645	7.27	7.28	10.29
	147	6685	7.31	7.29	10.31
	155	6725	7.25	7.26	10.27
	163	6765	7.34	7.32	10.34
	171	6805	7.26	7.33	10.31
	179	6845	7.28	7.28	10.29
802.11ax HE80	187	6885	7.26	7.25	10.27
	135	6625	7.27	7.25	10.27
	151	6705	7.3	7.31	10.32
	167	6785	7.31	7.3	10.32
802.11ax HE160	183	6865	7.25	7.26	10.27
	143	6665	12.83	12.96	15.91
	175	6825	12.91	12.98	15.96

Conducted Power (NB mode)					
UNII-7 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	117	6535	4.27	4.29	7.29
	121	6555	4.33	4.32	7.34
	125	6575	4.35	4.31	7.34
	129	6595	4.27	4.27	7.28
	133	6615	4.35	4.34	7.36
	137	6635	4.32	4.28	7.31
	141	6655	4.28	4.33	7.32
	145	6675	4.3	4.34	7.33
	149	6695	4.29	4.28	7.3
	153	6715	4.26	4.29	7.29
	157	6735	4.28	4.32	7.31
	161	6755	4.35	4.35	7.36
	165	6775	4.26	4.34	7.31
	169	6795	4.31	4.3	7.32
	173	6815	4.26	4.35	7.32
	177	6835	4.35	4.3	7.34
	181	6855	4.33	4.28	7.32
802.11be EHT40	123	6565	7.31	7.32	10.33
	131	6605	7.31	7.3	10.32
	139	6645	7.27	7.34	10.32
	147	6685	7.26	7.26	10.27
	155	6725	7.32	7.34	10.34
	163	6765	7.25	7.34	10.31
	171	6805	7.35	7.26	10.32
	179	6845	7.31	7.3	10.32
802.11be EHT80	187	6885	7.34	7.27	10.32
	135	6625	7.31	7.3	10.32
	151	6705	7.27	7.29	10.29
	167	6785	7.29	7.32	10.32
802.11be EHT160	183	6865	7.3	7.27	10.3
	143	6665	12.83	12.76	15.81
	175	6825	12.75	12.83	15.8

Conducted Power (NB mode)			
UNII-8 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	185	6875	7.3
	189	6895	7.27
	193	6915	7.35
	197	6935	7.34
	201	6955	7.32
	205	6975	7.31
	209	6995	7.3
	213	7015	7.3
	217	7035	7.35
	221	7055	7.32
	225	7075	7.35
	229	7095	7.34
	233	7115	7.29
802.11ax HE20	185	6875	7.35
	189	6895	7.29
	193	6915	7.32
	197	6935	7.35
	201	6955	7.31
	205	6975	7.31
	209	6995	7.31
	213	7015	7.29
	217	7035	7.33
	221	7055	7.28
	225	7075	7.3
	229	7095	7.3
	233	7115	7.29
802.11ax HE40	195	6925	10.28
	203	6965	10.33
	211	7005	10.3
	219	7045	10.31
	227	7085	10.29
802.11ax HE80	199	6945	12.84
	215	7025	12.82
802.11ax HE160	207	6985	13.96
802.11be EHT20	185	6875	7.25
	189	6895	7.28
	193	6915	7.33
	197	6935	7.26
	201	6955	7.29
	205	6975	7.3
	209	6995	7.31
	213	7015	7.35
	217	7035	7.29
	221	7055	7.35
	225	7075	7.3
	229	7095	7.26
	233	7115	7.26
802.11be EHT40	195	6925	10.31
	203	6965	10.32
	211	7005	10.3
	219	7045	10.3
	227	7085	10.25
802.11be EHT80	199	6945	12.83
	215	7025	12.83
802.11be EHT160	207	6985	13.79

Conducted Power (NB mode)			
UNII-8 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	185	6875	7.35
	189	6895	7.35
	193	6915	7.32
	197	6935	7.28
	201	6955	7.32
	205	6975	7.32
	209	6995	7.31
	213	7015	7.28
	217	7035	7.27
	221	7055	7.29
	225	7075	7.28
	229	7095	7.35
	233	7115	7.34
802.11ax HE20	185	6875	7.28
	189	6895	7.32
	193	6915	7.35
	197	6935	7.3
	201	6955	7.31
	205	6975	7.26
	209	6995	7.28
	213	7015	7.26
	217	7035	7.35
	221	7055	7.25
	225	7075	7.29
	229	7095	7.35
	233	7115	7.32
802.11ax HE40	195	6925	10.25
	203	6965	10.33
	211	7005	10.35
	219	7045	10.35
	227	7085	10.26
802.11ax HE80	199	6945	12.77
	215	7025	12.81
802.11ax HE160	207	6985	13.95
802.11be EHT20	185	6875	7.35
	189	6895	7.3
	193	6915	7.29
	197	6935	7.28
	201	6955	7.28
	205	6975	7.35
	209	6995	7.32
	213	7015	7.29
	217	7035	7.25
	221	7055	7.33
	225	7075	7.3
	229	7095	7.28
	233	7115	7.27
802.11be EHT40	195	6925	10.27
	203	6965	10.29
	211	7005	10.33
	219	7045	10.3
	227	7085	10.34
802.11be EHT80	199	6945	12.77
	215	7025	12.81
802.11be EHT160	207	6985	13.81

Conducted Power (NB mode)					
UNII-8 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	185	6875	1.82	1.8	4.82
	189	6895	1.8	1.76	4.79
	193	6915	1.83	1.83	4.84
	197	6935	1.76	1.75	4.77
	201	6955	1.83	1.79	4.82
	205	6975	1.8	1.8	4.81
	209	6995	1.83	1.83	4.84
	213	7015	1.78	1.84	4.82
	217	7035	1.77	1.76	4.78
	221	7055	1.85	1.79	4.83
	225	7075	1.84	1.79	4.83
	229	7095	1.81	1.8	4.82
	233	7115	1.79	1.81	4.81
802.11ax HE20	185	6875	4.33	4.29	7.32
	189	6895	4.28	4.33	7.32
	193	6915	4.27	4.34	7.32
	197	6935	4.25	4.34	7.31
	201	6955	4.28	4.32	7.31
	205	6975	4.28	4.35	7.33
	209	6995	4.33	4.27	7.31
	213	7015	4.34	4.34	7.35
	217	7035	4.29	4.35	7.33
	221	7055	4.25	4.26	7.27
	225	7075	4.32	4.33	7.34
	229	7095	4.26	4.27	7.28
	233	7115	4.26	4.26	7.27
802.11ax HE40	195	6925	7.31	7.3	10.32
	203	6965	7.27	7.35	10.32
	211	7005	7.32	7.31	10.33
	219	7045	7.32	7.26	10.3
	227	7085	7.28	7.26	10.28
802.11ax HE80	199	6945	10.31	10.26	13.3
	215	7025	10.34	10.32	13.34
802.11ax HE160	207	6985	12.83	12.93	15.89
802.11be EHT20	185	6875	4.32	4.28	7.31
	189	6895	4.35	4.29	7.33
	193	6915	4.28	4.33	7.32
	197	6935	4.26	4.26	7.27
	201	6955	4.26	4.34	7.31
	205	6975	4.29	4.3	7.31
	209	6995	4.32	4.3	7.32
	213	7015	4.34	4.25	7.31
	217	7035	4.32	4.33	7.34
	221	7055	4.27	4.35	7.32
	225	7075	4.26	4.26	7.27
	229	7095	4.32	4.32	7.33
	233	7115	4.31	4.26	7.3
802.11be EHT40	195	6925	7.31	7.33	10.33
	203	6965	7.25	7.27	10.27
	211	7005	7.26	7.34	10.31
	219	7045	7.3	7.29	10.31
	227	7085	7.34	7.27	10.32
802.11be EHT80	199	6945	10.33	10.3	13.33
	215	7025	10.31	10.26	13.3
802.11be EHT160	207	6985	12.82	12.8	15.82

Conducted Power (Tablet mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.45
	6	2437	15.46
	11	2462	15.43
	12	2467	15.39
	13	2472	15.43
802.11g	1	2412	15.32
	6	2437	15.33
	11	2462	15.35
	12	2467	15.33
	13	2472	15.32
802.11n HT20	1	2412	15.36
	6	2437	15.38
	11	2462	15.29
	12	2467	15.28
	13	2472	15.27
802.11n HT40	3	2422	15.38
	6	2437	15.39
	9	2452	15.38
	10	2457	15.35
	11	2462	15.34
802.11ax HE20	1	2412	15.36
	6	2437	15.39
	11	2462	15.29
	12	2467	15.28
	13	2472	15.27
802.11ax HE40	3	2422	15.29
	6	2437	15.37
	9	2452	15.33
	10	2457	15.28
	11	2462	15.27
802.11be EHT20	1	2412	15.38
	6	2437	15.29
	11	2462	15.31
	12	2467	15.26
	13	2472	15.26
802.11be EHT40	3	2422	15.37
	6	2437	15.33
	9	2452	15.36
	10	2457	15.28
	11	2462	15.27

Conducted Power (Tablet mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	15.43
	6	2437	15.47
	11	2462	15.46
	12	2467	15.41
	13	2472	15.38
802.11g	1	2412	15.39
	6	2437	15.36
	11	2462	15.38
	12	2467	14.37
	13	2472	15.37
802.11n HT20	1	2412	15.33
	6	2437	15.35
	11	2462	15.39
	12	2467	15.33
	13	2472	15.32
802.11n HT40	3	2422	15.33
	6	2437	15.31
	9	2452	15.32
	10	2457	15.3
	11	2462	15.29
802.11ax HE20	1	2412	15.29
	6	2437	15.37
	11	2462	15.32
	12	2467	15.25
	13	2472	15.24
802.11ax HE40	3	2422	15.37
	6	2437	15.38
	9	2452	15.31
	10	2457	15.3
	11	2462	15.29
802.11be EHT20	1	2412	15.38
	6	2437	15.29
	11	2462	15.38
	12	2467	15.35
	13	2472	15.34
802.11be EHT40	3	2422	15.37
	6	2437	15.38
	9	2452	15.31
	10	2457	15.3
	11	2462	15.28

Conducted Power (Tablet mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	15.43	15.31	18.38
	6	2437	15.46	15.37	18.43
	11	2462	15.45	15.35	18.41
	12	2467	15.44	15.35	18.41
	13	2472	15.43	15.34	18.40
802.11g	1	2412	15.32	15.31	18.33
	6	2437	15.35	15.29	18.33
	11	2462	15.29	15.31	18.31
	12	2467	15.26	15.29	18.29
	13	2472	15.24	15.27	18.27
802.11n HT20	1	2412	15.33	15.38	18.37
	6	2437	15.32	15.31	18.33
	11	2462	15.31	15.33	18.33
	12	2467	15.3	15.3	18.31
	13	2472	15.28	15.28	18.29
802.11n HT40	3	2422	15.33	15.31	18.33
	6	2437	15.31	15.37	18.35
	9	2452	15.39	15.32	18.37
	10	2457	15.35	15.29	18.33
	11	2462	15.33	15.28	18.32
802.11ax HE20	1	2412	15.33	15.36	18.36
	6	2437	15.36	15.31	18.35
	11	2462	15.37	15.35	18.37
	12	2467	15.35	15.35	18.36
	13	2472	15.34	15.33	18.35
802.11ax HE40	3	2422	15.33	15.35	18.35
	6	2437	15.36	15.36	18.37
	9	2452	15.31	15.29	18.31
	10	2457	15.29	15.28	18.30
	11	2462	15.28	15.27	18.29
802.11be EHT20	1	2412	15.37	15.32	18.36
	6	2437	15.32	15.36	18.35
	11	2462	15.39	15.37	18.39
	12	2467	15.38	15.35	18.38
	13	2472	15.37	15.34	18.37
802.11be EHT40	3	2422	15.32	15.38	18.36
	6	2437	15.33	15.35	18.35
	9	2452	15.31	15.32	18.33
	10	2457	15.3	15.3	18.31
	11	2462	15.29	15.31	18.31

Conducted Power (Tablet mode)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	11.39
	39	2441	11.31
	78	2480	11.38
LE	0	2402	9.7
	19	2440	9.68
	39	2480	9.59

Conducted Power (Tablet mode)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	10.86
	40	5200	10.83
	44	5220	10.87
	48	5240	10.85
802.11n HT20	36	5180	10.82
	40	5200	10.89
	44	5220	10.86
	48	5240	10.79
802.11n HT40	38	5190	10.88
	46	5230	10.84
802.11ac VHT20	36	5180	10.89
	40	5200	10.85
	44	5220	10.86
	48	5240	10.87
802.11ac VHT40	38	5190	10.83
	46	5230	10.81
802.11ac VHT80	42	5210	10.82
802.11ax HE20	36	5180	10.87
	40	5200	10.82
	44	5220	10.86
	48	5240	10.87
802.11ax HE40	38	5190	10.83
	46	5230	10.87
802.11ax HE80	42	5210	10.88
802.11be EHT20	36	5180	10.85
	40	5200	10.79
	44	5220	10.87
	48	5240	10.81
802.11be EHT40	38	5190	10.83
	46	5230	10.88
802.11be EHT80	42	5210	10.85

Conducted Power (Tablet mode)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	10.88
	40	5200	10.82
	44	5220	10.81
	48	5240	10.88
802.11n HT20	36	5180	10.87
	40	5200	10.79
	44	5220	10.82
	48	5240	10.87
802.11n HT40	38	5190	10.86
	46	5230	10.87
802.11ac VHT20	36	5180	10.89
	40	5200	10.82
	44	5220	10.87
	48	5240	10.79
802.11ac VHT40	38	5190	10.77
	46	5230	10.83
802.11ac VHT80	42	5210	10.83
802.11ax HE20	36	5180	10.86
	40	5200	10.85
	44	5220	10.83
	48	5240	10.89
802.11ax HE40	38	5190	10.79
	46	5230	10.88
802.11ax HE80	42	5210	10.85
802.11be EHT20	36	5180	10.81
	40	5200	10.83
	44	5220	10.82
	48	5240	10.86
802.11be EHT40	38	5190	10.88
	46	5230	10.85
802.11be EHT80	42	5210	10.87

Conducted Power (Tablet mode)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	10.86	10.82	13.85
	40	5200	10.79	10.89	13.85
	44	5220	10.83	10.86	13.86
	48	5240	10.87	10.82	13.86
802.11n HT20	36	5180	10.82	10.86	13.85
	40	5200	10.85	10.81	13.84
	44	5220	10.88	10.85	13.88
	48	5240	10.89	10.84	13.88
802.11n HT40	38	5190	10.81	10.79	13.81
	46	5230	10.83	10.87	13.86
802.11ac VHT20	36	5180	10.84	10.88	13.87
	40	5200	10.79	10.82	13.82
	44	5220	10.85	10.81	13.84
	48	5240	10.83	10.83	13.84
802.11ac VHT40	38	5190	10.88	10.82	13.86
	46	5230	10.89	10.79	13.85
802.11ac VHT80	42	5210	10.88	10.86	13.88
802.11ax HE20	36	5180	10.83	10.86	13.86
	40	5200	10.82	10.88	13.86
	44	5220	10.87	10.88	13.89
	48	5240	10.81	10.89	13.86
802.11ax HE40	38	5190	10.83	10.86	13.86
	46	5230	10.79	10.83	13.82
802.11ax HE80	42	5210	10.88	10.81	13.86
802.11be EHT20	36	5180	10.81	10.87	13.85
	40	5200	10.83	10.85	13.85
	44	5220	10.81	10.83	13.83
	48	5240	10.86	10.82	13.85
802.11be EHT40	38	5190	10.83	10.89	13.87
	46	5230	10.86	10.83	13.86
802.11be EHT80	42	5210	10.87	10.81	13.85

Conducted Power (Tablet mode)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	10.82
	56	5280	10.81
	60	5300	10.82
	64	5320	10.82
802.11n HT20	52	5260	10.87
	56	5280	10.85
	60	5300	10.87
	64	5320	10.79
802.11n HT40	54	5270	10.87
	62	5310	10.89
802.11ac VHT20	52	5260	10.82
	56	5280	10.89
	60	5300	10.82
	64	5320	10.79
802.11ac VHT40	54	5270	10.89
	62	5310	10.82
802.11ac VHT80	58	5290	10.85
802.11ac VHT160	50	5250	10.95
802.11ax HE20	52	5260	10.81
	56	5280	10.87
	60	5300	10.86
	64	5320	10.83
802.11ax HE40	54	5270	10.86
	62	5310	10.79
802.11ax HE80	58	5290	10.88
802.11ax HE160	50	5250	10.88
802.11be EHT20	52	5260	10.82
	56	5280	10.88
	60	5300	10.82
	64	5320	10.86
802.11be EHT40	54	5270	10.87
	62	5310	10.81
802.11be EHT80	58	5290	10.87
802.11be EHT160	50	5250	10.85

Conducted Power (Tablet mode)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	10.83
	56	5280	10.87
	60	5300	10.79
	64	5320	10.82
802.11n HT20	52	5260	10.79
	56	5280	10.83
	60	5300	10.88
	64	5320	10.81
802.11n HT40	54	5270	10.85
	62	5310	10.79
802.11ac VHT20	52	5260	10.87
	56	5280	10.81
	60	5300	10.88
	64	5320	10.79
802.11ac VHT40	54	5270	10.85
	62	5310	10.87
802.11ac VHT80	58	5290	10.85
802.11ac VHT160	50	5250	10.96
802.11ax HE20	52	5260	10.83
	56	5280	10.85
	60	5300	10.86
	64	5320	10.81
802.11ax HE40	54	5270	10.79
	62	5310	10.83
802.11ax HE80	58	5290	10.79
802.11ax HE160	50	5250	10.83
802.11be EHT20	52	5260	10.83
	56	5280	10.89
	60	5300	10.85
	64	5320	10.87
802.11be EHT40	54	5270	10.85
	62	5310	10.88
802.11be EHT80	58	5290	10.83
802.11be EHT160	50	5250	10.79

Conducted Power (Tablet mode)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	10.81	10.82	13.83
	56	5280	10.83	10.79	13.82
	60	5300	10.85	10.85	13.86
	64	5320	10.82	10.81	13.83
802.11n HT20	52	5260	10.87	10.86	13.88
	56	5280	10.82	10.88	13.86
	60	5300	10.89	10.87	13.89
	64	5320	10.82	10.79	13.82
802.11n HT40	54	5270	10.82	10.82	13.83
	62	5310	10.88	10.85	13.88
802.11ac VHT20	52	5260	10.82	10.85	13.85
	56	5280	10.85	10.86	13.87
	60	5300	10.89	10.87	13.89
	64	5320	10.86	10.85	13.87
802.11ac VHT40	54	5270	10.82	10.85	13.85
	62	5310	10.89	10.83	13.87
802.11ac VHT80	58	5290	10.82	10.82	13.83
802.11ac VHT160	50	5250	10.95	10.89	13.93
802.11ax HE20	52	5260	10.88	10.82	13.86
	56	5280	10.83	10.89	13.87
	60	5300	10.81	10.87	13.85
	64	5320	10.83	10.85	13.85
802.11ax HE40	54	5270	10.88	10.82	13.86
	62	5310	10.83	10.86	13.86
802.11ax HE80	58	5290	10.86	10.83	13.86
802.11ax HE160	50	5250	10.86	10.82	13.85
802.11be EHT20	52	5260	10.82	10.82	13.83
	56	5280	10.81	10.87	13.85
	60	5300	10.79	10.81	13.81
	64	5320	10.87	10.88	13.89
802.11be EHT40	54	5270	10.81	10.83	13.83
	62	5310	10.82	10.88	13.86
802.11be EHT80	58	5290	10.79	10.82	13.82
802.11be EHT160	50	5250	10.87	10.89	13.89

Conducted Power (Tablet mode)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.89
	116	5580	10.86
	120	5600	10.89
	124	5620	10.85
	132	5660	10.82
	140	5700	10.82
	144	5720	10.79
802.11n HT20	100	5500	10.85
	116	5580	10.89
	120	5600	10.83
	124	5620	10.82
	132	5660	10.85
	140	5700	10.81
	144	5720	10.85
802.11n HT40	102	5510	10.88
	110	5550	10.83
	118	5590	10.81
	126	5630	10.85
	134	5670	10.87
	142	5710	10.86
802.11ac VHT20	100	5500	10.81
	116	5580	10.85
	120	5600	10.79
	124	5620	10.87
	132	5660	10.83
	140	5700	10.83
	144	5720	10.79
802.11ac VHT40	102	5510	10.87
	110	5550	10.87
	118	5590	10.79
	126	5630	10.86
	134	5670	10.85
	142	5710	10.83
802.11ac VHT80	106	5530	10.96
	122	5610	10.89
	138	5690	10.96
802.11ac VHT160	114	5570	10.99
802.11ax HE20	100	5500	10.87
	116	5580	10.82
	120	5600	10.85
	124	5620	10.81
	132	5660	10.82
	140	5700	10.81
	144	5720	10.83
802.11ax HE40	102	5510	10.83
	110	5550	10.88
	118	5590	10.79
	126	5630	10.88
	134	5670	10.86
	142	5710	10.87
802.11ax HE80	106	5530	10.88
	122	5610	10.85
	138	5690	10.83
802.11ax HE160	114	5570	10.89
802.11be EHT20	100	5500	10.86
	116	5580	10.85
	120	5600	10.79
	124	5620	10.83
	132	5660	10.86
	140	5700	10.83
	144	5720	10.79
802.11be EHT40	102	5510	10.83
	110	5550	10.85
	118	5590	10.81
	126	5630	10.79
	134	5670	10.82
	142	5710	10.82
802.11be EHT80	106	5530	10.89
	122	5610	10.85
	138	5690	10.79
802.11be EHT160	114	5570	10.83

Conducted Power (Tablet mode)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	10.85
	116	5580	10.83
	120	5600	10.83
	124	5620	10.89
	132	5660	10.83
	140	5700	10.85
	144	5720	10.86
802.11n HT20	100	5500	10.82
	116	5580	10.85
	120	5600	10.79
	124	5620	10.86
	132	5660	10.87
	140	5700	10.87
	144	5720	10.82
802.11n HT40	102	5510	10.81
	110	5550	10.86
	118	5590	10.81
	126	5630	10.79
	134	5670	10.88
802.11ac VHT20	142	5710	10.83
	100	5500	10.82
	116	5580	10.86
	120	5600	10.85
	124	5620	10.87
	132	5660	10.85
	140	5700	10.81
802.11ac VHT40	144	5720	10.85
	102	5510	10.87
	110	5550	10.82
	118	5590	10.83
	126	5630	10.89
802.11ac VHT80	134	5670	10.81
	142	5710	10.85
	106	5530	10.95
802.11ac VHT160	122	5610	10.9
	138	5690	10.93
802.11ax HE20	114	5570	10.96
	100	5500	10.82
	116	5580	10.83
	120	5600	10.86
	124	5620	10.89
	132	5660	10.85
	140	5700	10.82
802.11ax HE40	144	5720	10.85
	102	5510	10.79
	110	5550	10.81
	118	5590	10.87
	126	5630	10.87
802.11ax HE80	134	5670	10.82
	142	5710	10.82
	106	5530	10.87
802.11ax HE160	122	5610	10.86
	138	5690	10.83
802.11be EHT20	114	5570	10.83
	100	5500	10.83
	116	5580	10.82
	120	5600	10.88
	124	5620	10.85
	132	5660	10.85
	140	5700	10.83
802.11be EHT40	144	5720	10.85
	102	5510	10.89
	110	5550	10.87
	118	5590	10.83
	126	5630	10.87
802.11be EHT80	134	5670	10.83
	142	5710	10.88
	106	5530	10.86
802.11be EHT160	122	5610	10.79
	138	5690	10.85
	114	5570	10.86

Conducted Power (Tablet mode)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	10.82	10.82	13.83
	116	5580	10.83	10.85	13.85
	120	5600	10.89	10.79	13.85
	124	5620	10.82	10.85	13.85
	132	5660	10.86	10.89	13.89
	140	5700	10.81	10.83	13.83
	144	5720	10.86	10.82	13.85
802.11n HT20	100	5500	10.79	10.77	13.79
	116	5580	10.81	10.86	13.85
	120	5600	10.86	10.82	13.85
	124	5620	10.79	10.88	13.85
	132	5660	10.86	10.88	13.88
	140	5700	10.81	10.81	13.82
	144	5720	10.88	10.81	13.86
802.11n HT40	102	5510	10.81	10.86	13.85
	110	5550	10.89	10.81	13.86
	118	5590	10.83	10.85	13.85
	126	5630	10.85	10.88	13.88
	134	5670	10.79	10.82	13.82
	142	5710	10.88	10.85	13.88
	100	5500	10.85	10.89	13.88
802.11ac VHT20	116	5580	10.86	10.85	13.87
	120	5600	10.83	10.86	13.86
	124	5620	10.89	10.87	13.89
	132	5660	10.89	10.83	13.87
	140	5700	10.85	10.79	13.83
	144	5720	10.82	10.81	13.83
	102	5510	10.81	10.86	13.85
802.11ac VHT40	110	5550	10.86	10.82	13.85
	118	5590	10.86	10.85	13.87
	126	5630	10.82	10.88	13.86
	134	5670	10.83	10.88	13.87
	142	5710	10.79	10.85	13.83
	106	5530	10.96	10.93	13.96
	122	5610	10.83	10.76	13.81
802.11ac VHT80	138	5690	10.93	10.81	13.88
802.11ac VHT160	114	5570	10.98	10.93	13.97
802.11ax HE20	100	5500	10.81	10.87	13.85
	116	5580	10.79	10.88	13.85
	120	5600	10.82	10.87	13.86
	124	5620	10.88	10.86	13.88
	132	5660	10.82	10.81	13.83
	140	5700	10.89	10.82	13.87
	144	5720	10.88	10.83	13.87
802.11ax HE40	102	5510	10.82	10.82	13.83
	110	5550	10.82	10.86	13.85
	118	5590	10.81	10.81	13.82
	126	5630	10.88	10.87	13.89
	134	5670	10.79	10.83	13.82
	142	5710	10.88	10.86	13.88
	106	5530	10.81	10.89	13.86
802.11ax HE80	122	5610	10.81	10.87	13.85
	138	5690	10.86	10.87	13.88
	114	5570	10.88	10.86	13.88
802.11ax HE160	100	5500	10.86	10.88	13.88
802.11be EHT20	116	5580	10.88	10.87	13.89
	120	5600	10.87	10.82	13.86
	124	5620	10.82	10.85	13.85
	132	5660	10.86	10.83	13.86
	140	5700	10.87	10.81	13.85
	144	5720	10.82	10.86	13.85
	102	5510	10.89	10.81	13.86
802.11be EHT40	110	5550	10.81	10.89	13.86
	118	5590	10.81	10.79	13.81
	126	5630	10.82	10.79	13.82
	134	5670	10.87	10.89	13.89
	142	5710	10.79	10.83	13.82
	106	5530	10.88	10.85	13.88
	122	5610	10.84	10.85	13.86
802.11be EHT80	138	5690	10.79	10.89	13.85
	114	5570	10.84	10.88	13.87

Conducted Power (Tablet mode)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	10.86
	153	5765	10.81
	157	5785	10.88
	161	5805	10.82
	165	5825	10.83
802.11n HT20	149	5745	10.85
	153	5765	10.89
	157	5785	10.88
	161	5805	10.85
	165	5825	10.81
802.11n HT40	151	5755	10.82
	159	5795	10.86
802.11ac VHT20	149	5745	10.83
	153	5765	10.81
	157	5785	10.89
	161	5805	10.86
	165	5825	10.85
802.11ac VHT40	151	5755	10.88
	159	5795	10.83
802.11ac VHT80	155	5775	10.9
802.11ax HE20	149	5745	10.88
	153	5765	10.83
	157	5785	10.85
	161	5805	10.81
	165	5825	10.86
802.11ax HE40	151	5755	10.89
	159	5795	10.85
802.11ax HE80	155	5775	10.87
802.11be EHT20	149	5745	10.86
	153	5765	10.89
	157	5785	10.87
	161	5805	10.79
	165	5825	10.89
802.11be EHT40	151	5755	10.87
	159	5795	10.88
802.11be EHT80	155	5775	10.79

Conducted Power (Tablet mode)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	10.86
	153	5765	10.83
	157	5785	10.81
	161	5805	10.87
	165	5825	10.82
802.11n HT20	149	5745	10.81
	153	5765	10.86
	157	5785	10.81
	161	5805	10.79
	165	5825	10.89
802.11n HT40	151	5755	10.85
	159	5795	10.83
802.11ac VHT20	149	5745	10.88
	153	5765	10.89
	157	5785	10.86
	161	5805	10.85
	165	5825	10.85
802.11ac VHT40	151	5755	10.82
	159	5795	10.83
802.11ac VHT80	155	5775	10.9
802.11ax HE20	149	5745	10.83
	153	5765	10.87
	157	5785	10.86
	161	5805	10.82
	165	5825	10.85
802.11ax HE40	151	5755	10.82
	159	5795	10.88
802.11ax HE80	155	5775	10.81
802.11be EHT20	149	5745	10.79
	153	5765	10.88
	157	5785	10.81
	161	5805	10.89
	165	5825	10.82
802.11be EHT40	151	5755	10.79
	159	5795	10.86
802.11be EHT80	155	5775	10.89

Conducted Power (Tablet mode)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	10.83	10.79	13.82
	153	5765	10.83	10.81	13.83
	157	5785	10.79	10.83	13.82
	161	5805	10.86	10.83	13.86
	165	5825	10.88	10.79	13.85
802.11n HT20	149	5745	10.88	10.81	13.86
	153	5765	10.85	10.79	13.83
	157	5785	10.79	10.88	13.85
	161	5805	10.87	10.82	13.86
	165	5825	10.85	10.89	13.88
802.11n HT40	151	5755	10.81	10.83	13.83
	159	5795	10.85	10.86	13.87
802.11ac VHT20	149	5745	10.87	10.85	13.87
	153	5765	10.83	10.85	13.85
	157	5785	10.81	10.83	13.83
	161	5805	10.88	10.86	13.88
	165	5825	10.83	10.85	13.85
802.11ac VHT40	151	5755	10.87	10.89	13.89
	159	5795	10.85	10.88	13.88
802.11ac VHT80	155	5775	10.98	10.93	13.97
802.11ax HE20	149	5745	10.82	10.81	13.83
	153	5765	10.85	10.88	13.88
	157	5785	10.86	10.86	13.87
	161	5805	10.85	10.89	13.88
	165	5825	10.87	10.85	13.87
802.11ax HE40	151	5755	10.89	10.82	13.87
	159	5795	10.82	10.85	13.85
802.11ax HE80	155	5775	10.83	10.86	13.86
802.11be EHT20	149	5745	10.89	10.83	13.87
	153	5765	10.86	10.86	13.87
	157	5785	10.83	10.89	13.87
	161	5805	10.85	10.89	13.88
	165	5825	10.85	10.87	13.87
802.11be EHT40	151	5755	10.86	10.81	13.85
	159	5795	10.85	10.88	13.88
802.11be EHT80	155	5775	10.85	10.88	13.88

Conducted Power (Tablet mode)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	10.79
	173	5865	10.79
	177	5885	10.85
802.11n HT20	169	5845	10.83
	173	5865	10.85
	177	5885	10.85
802.11n HT40	167	5835	10.89
	175	5875	10.83
802.11ac VHT20	169	5845	10.86
	173	5865	10.79
	177	5885	10.88
802.11ac VHT40	167	5835	10.85
	175	5875	10.85
802.11ac VHT80	171	5855	10.86
802.11ac VHT160	163	5815	10.98
802.11ax HE20	169	5845	10.79
	173	5865	10.83
	177	5885	10.87
802.11ax HE40	167	5835	10.86
	175	5875	10.79
802.11ax HE80	171	5855	10.85
802.11ax HE160	163	5815	10.82
802.11be EHT20	169	5845	10.83
	173	5865	10.85
	177	5885	10.86
802.11be EHT40	167	5835	10.85
	175	5875	10.86
802.11be EHT80	171	5855	10.85
802.11be EHT160	163	5815	10.83

Conducted Power (Tablet mode)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	10.86
	173	5865	10.87
	177	5885	10.89
802.11n HT20	169	5845	10.88
	173	5865	10.86
	177	5885	10.82
802.11n HT40	167	5835	10.85
	175	5875	10.79
802.11ac VHT20	169	5845	10.86
	173	5865	10.87
	177	5885	10.81
802.11ac VHT40	167	5835	10.89
	175	5875	10.83
802.11ac VHT80	171	5855	10.86
802.11ac VHT160	163	5815	10.97
802.11ax HE20	169	5845	10.89
	173	5865	10.83
	177	5885	10.89
802.11ax HE40	167	5835	10.88
	175	5875	10.86
802.11ax HE80	171	5855	10.83
802.11ax HE160	163	5815	10.79
802.11be EHT20	169	5845	10.82
	173	5865	10.89
	177	5885	10.83
802.11be EHT40	167	5835	10.79
	175	5875	10.86
802.11be EHT80	171	5855	10.82
802.11be EHT160	163	5815	10.85

Conducted Power (Tablet mode)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	10.89	10.81	13.86
	173	5865	10.85	10.86	13.87
	177	5885	10.82	10.89	13.87
802.11n HT20	169	5845	10.81	10.83	13.83
	173	5865	10.86	10.89	13.89
	177	5885	10.89	10.83	13.87
802.11n HT40	167	5835	10.81	10.86	13.85
	175	5875	10.81	10.87	13.85
802.11ac VHT20	169	5845	10.83	10.89	13.87
	173	5865	10.79	10.82	13.82
	177	5885	10.85	10.86	13.87
802.11ac VHT40	167	5835	10.89	10.85	13.88
	175	5875	10.86	10.87	13.88
802.11ac VHT80	171	5855	10.88	10.87	13.89
802.11ac VHT160	163	5815	10.95	10.98	13.98
802.11ax HE20	169	5845	10.85	10.88	13.88
	173	5865	10.79	10.81	13.81
	177	5885	10.87	10.86	13.88
802.11ax HE40	167	5835	10.82	10.85	13.85
	175	5875	10.85	10.88	13.88
802.11ax HE80	171	5855	10.81	10.86	13.85
802.11ax HE160	163	5815	10.87	10.82	13.86
802.11be EHT20	169	5845	10.83	10.79	13.82
	173	5865	10.81	10.79	13.81
	177	5885	10.86	10.87	13.88
802.11be EHT40	167	5835	10.83	10.85	13.85
	175	5875	10.83	10.87	13.86
802.11be EHT80	171	5855	10.87	10.82	13.86
802.11be EHT160	163	5815	10.89	10.81	13.86

Conducted Power (Tablet mode)			
UNII-5 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	10.45
	5	5975	10.43
	9	5995	10.28
	13	6015	10.36
	17	6035	10.42
	21	6055	10.41
	25	6075	10.32
	29	6095	10.38
	33	6115	10.31
	37	6135	10.35
	41	6155	10.42
	45	6175	10.46
	49	6195	10.37
	53	6215	10.37
	57	6235	10.41
	61	6255	10.43
	65	6275	10.39
	69	6295	10.38
	73	6315	10.45
	77	6335	10.41
	81	6355	10.43
	85	6375	10.42
	89	6395	10.45
	93	6415	11.43
802.11ax HE20	1	5955	10.36
	5	5975	10.32
	9	5995	10.33
	13	6015	10.32
	17	6035	10.35
	21	6055	10.32
	25	6075	10.31
	29	6095	10.31
	33	6115	10.29
	37	6135	10.29
	41	6155	10.39
	45	6175	10.38
	49	6195	10.29
	53	6215	10.31
	57	6235	10.37
	61	6255	10.29
	65	6275	10.32
	69	6295	10.32
	73	6315	10.37
	77	6335	10.35
	81	6355	10.32
	85	6375	10.36
	89	6395	10.39
	93	6415	11.29
802.11ax HE40	3	5965	10.38
	11	6005	10.31
	19	6045	10.39
	27	6085	10.29
	35	6125	10.37
	43	6165	10.33
	51	6205	10.37
	59	6245	10.39
	67	6285	10.32
	75	6325	10.36
802.11ax HE80	83	6365	10.37
	91	6405	10.38
	7	5985	10.38
	23	6065	10.32
	39	6145	10.35
802.11ax HE160	55	6225	10.39
	71	6305	10.32
	87	6385	10.29
	15	6025	10.33
	47	6185	10.33
	79	6345	10.37

Conducted Power (Tablet mode)			
UNII-5 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	1	5955	10.31
	5	5975	10.38
	9	5995	10.36
	13	6015	10.29
	17	6035	10.39
	21	6055	10.36
	25	6075	10.39
	29	6095	10.32
	33	6115	10.31
	37	6135	10.31
	41	6155	10.38
	45	6175	10.39
	49	6195	10.35
	53	6215	10.36
	57	6235	10.32
	61	6255	10.31
	65	6275	10.37
	69	6295	10.35
	73	6315	10.36
	77	6335	10.37
	81	6355	10.35
	85	6375	10.35
	89	6395	10.39
	93	6415	11.29
802.11be EHT40	3	5965	10.35
	11	6005	10.36
	19	6045	10.38
	27	6085	10.35
	35	6125	10.39
	43	6165	10.33
	51	6205	10.35
	59	6245	10.32
	67	6285	10.33
	75	6325	10.33
	83	6365	10.33
	91	6405	10.31
802.11be EHT80	7	5985	10.29
	23	6065	10.35
	39	6145	10.35
	55	6225	10.31
	71	6305	10.37
802.11be EHT160	87	6385	10.33
	15	6025	10.31
	47	6185	10.39
	79	6345	10.33

Conducted Power (Tablet mode)			
UNII-5 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	10.36
	5	5975	10.38
	9	5995	10.38
	13	6015	10.39
	17	6035	10.32
	21	6055	10.36
	25	6075	10.36
	29	6095	10.29
	33	6115	10.31
	37	6135	10.29
	41	6155	10.35
	45	6175	10.37
	49	6195	10.35
	53	6215	10.29
	57	6235	10.33
	61	6255	10.39
	65	6275	10.37
	69	6295	10.32
	73	6315	10.37
	77	6335	10.36
802.11ax HE20	81	6355	10.29
	85	6375	10.31
	89	6395	10.35
	93	6415	10.36
	1	5955	10.38
	5	5975	10.38
	9	5995	10.29
	13	6015	10.38
	17	6035	10.37
	21	6055	10.35
	25	6075	10.33
	29	6095	10.29
	33	6115	10.39
	37	6135	10.32
	41	6155	10.36
	45	6175	10.32
	49	6195	10.36
	53	6215	10.32
	57	6235	10.33
	61	6255	10.38
802.11ax HE40	65	6275	10.36
	69	6295	10.33
	73	6315	10.37
	77	6335	10.36
	81	6355	10.32
	85	6375	10.38
	89	6395	10.31
	93	6415	10.39
	3	5965	10.35
	11	6005	10.38
	19	6045	10.36
	27	6085	10.29
802.11ax HE80	35	6125	10.33
	43	6165	10.35
	51	6205	10.37
	59	6245	10.38
	67	6285	10.38
	75	6325	10.32
802.11ax HE160	83	6365	10.33
	91	6405	10.37
	7	5985	10.32
	23	6065	10.39
	39	6145	10.36
	55	6225	10.31
	71	6305	10.39
	87	6385	10.38
	15	6025	10.2
	47	6185	10.41
	79	6345	10.3

Conducted Power (Tablet mode)			
UNII-5 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	1	5955	10.37
	5	5975	10.31
	9	5995	10.31
	13	6015	10.33
	17	6035	10.38
	21	6055	10.38
	25	6075	10.37
	29	6095	10.31
	33	6115	10.32
	37	6135	10.29
	41	6155	10.35
	45	6175	10.36
	49	6195	10.31
	53	6215	10.33
	57	6235	10.37
	61	6255	10.36
	65	6275	10.35
	69	6295	10.37
	73	6315	10.38
	77	6335	10.36
	81	6355	10.38
802.11be EHT40	85	6375	10.32
	89	6395	10.33
	93	6415	10.38
	3	5965	10.35
	11	6005	10.29
	19	6045	10.32
	27	6085	10.31
	35	6125	10.35
	43	6165	10.37
	51	6205	10.36
802.11be EHT80	59	6245	10.33
	67	6285	10.38
	75	6325	10.33
	83	6365	10.38
	91	6405	10.32
	7	5985	10.35
802.11be EHT160	23	6065	10.29
	39	6145	10.36
	55	6225	10.38
	71	6305	10.32
	87	6385	10.29
	15	6025	10.33
	47	6185	10.37
	79	6345	10.38

Conducted Power (Tablet mode)					
UNII-5 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	9.87	10.47	13.19
	5	5975	9.76	10.45	13.13
	9	5995	9.38	10.15	12.79
	13	6015	9.65	10.22	12.95
	17	6035	10.11	10.45	13.29
	21	6055	10.17	10.46	13.33
	25	6075	10.03	10.48	13.27
	29	6095	9.56	10.35	12.98
	33	6115	10.43	10.45	13.45
	37	6135	10.47	10.46	13.48
	41	6155	10.36	10.18	13.28
	45	6175	10.32	10.19	13.27
	49	6195	10.15	10.05	13.11
	53	6215	10.16	9.93	13.06
	57	6235	10.19	9.85	13.03
	61	6255	10.23	9.78	13.02
	65	6275	10.25	9.81	13.05
	69	6295	10.35	9.75	13.07
	73	6315	10.36	9.71	13.06
	77	6335	10.41	9.73	13.09
802.11ax HE20	81	6355	10.39	10.35	13.38
	85	6375	10.43	10.36	13.41
	89	6395	10.41	10.38	13.41
	93	6415	10.98	10.97	13.99
	1	5955	10.36	10.36	13.37
	5	5975	10.37	10.31	13.35
	9	5995	10.32	10.31	13.33
	13	6015	10.37	10.33	13.36
	17	6035	10.39	10.36	13.39
	21	6055	10.35	10.38	13.38
	25	6075	10.39	10.33	13.37
	29	6095	10.36	10.31	13.35
	33	6115	10.37	10.35	13.37
	37	6135	10.31	10.37	13.35
	41	6155	10.35	10.38	13.38
	45	6175	10.29	10.32	13.32
	49	6195	10.38	10.32	13.36
	53	6215	10.37	10.31	13.35
	57	6235	10.35	10.35	13.36
	61	6255	10.31	10.31	13.32
802.11ax HE40	65	6275	10.33	10.35	13.35
	69	6295	10.29	10.35	13.33
	73	6315	10.33	10.38	13.37
	77	6335	10.33	10.35	13.35
	81	6355	10.35	10.36	13.37
	85	6375	10.33	10.37	13.36
	89	6395	10.35	10.33	13.35
	93	6415	10.92	10.92	13.93
	3	5965	10.38	10.33	13.37
	11	6005	10.32	10.39	13.37
	19	6045	10.33	10.36	13.36
	27	6085	10.33	10.36	13.36
802.11ax HE80	35	6125	10.38	10.31	13.36
	43	6165	10.33	10.35	13.35
	51	6205	10.29	10.38	13.35
	59	6245	10.32	10.29	13.32
	67	6285	10.29	10.35	13.33
	75	6325	10.29	10.36	13.34
802.11ax HE160	83	6365	10.37	10.32	13.36
	91	6405	10.35	10.33	13.35
	7	5985	10.29	10.32	13.32
	23	6065	10.31	10.36	13.35
	39	6145	10.31	10.37	13.35
	55	6225	10.36	10.31	13.35
	71	6305	10.31	10.38	13.36
	87	6385	10.37	10.35	13.37
	15	6025	10.38	10.29	13.35
	47	6185	10.33	10.39	13.37
	79	6345	10.37	10.38	13.39

Conducted Power (Tablet mode)					
UNII-5 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	1	5955	10.32	10.36	13.35
	5	5975	10.33	10.31	13.33
	9	5995	10.29	10.35	13.33
	13	6015	10.31	10.39	13.36
	17	6035	10.36	10.36	13.37
	21	6055	10.31	10.36	13.35
	25	6075	10.31	10.39	13.36
	29	6095	10.39	10.33	13.37
	33	6115	10.32	10.38	13.36
	37	6135	10.36	10.37	13.38
	41	6155	10.33	10.31	13.33
	45	6175	10.36	10.36	13.37
	49	6195	10.35	10.33	13.35
	53	6215	10.35	10.32	13.35
	57	6235	10.31	10.38	13.36
	61	6255	10.31	10.33	13.33
	65	6275	10.37	10.32	13.36
	69	6295	10.31	10.38	13.36
	73	6315	10.29	10.35	13.33
	77	6335	10.36	10.36	13.37
	81	6355	10.31	10.36	13.35
802.11be EHT40	85	6375	10.35	10.38	13.38
	89	6395	10.36	10.33	13.36
	93	6415	10.86	10.83	13.86
	3	5965	10.39	10.33	13.37
	11	6005	10.35	10.39	13.38
	19	6045	10.32	10.31	13.33
	27	6085	10.37	10.33	13.36
	35	6125	10.32	10.36	13.35
	43	6165	10.38	10.36	13.38
	51	6205	10.29	10.31	13.31
	59	6245	10.32	10.29	13.32
	67	6285	10.29	10.32	13.32
802.11be EHT80	75	6325	10.37	10.32	13.36
	83	6365	10.35	10.35	13.36
	91	6405	10.33	10.29	13.32
	7	5985	10.38	10.37	13.39
	23	6065	10.36	10.36	13.37
	39	6145	10.31	10.31	13.32
802.11be EHT160	55	6225	10.39	10.36	13.39
	71	6305	10.35	10.39	13.38
	87	6385	10.32	10.29	13.32
	15	6025	10.38	10.31	13.36
	47	6185	10.36	10.33	13.36
	79	6345	10.32	10.31	13.33

Conducted Power (Tablet mode)			
UNII-6 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	11.35
	101	6455	11.32
	105	6475	11.36
	109	6495	11.39
	113	6515	11.29
802.11ax HE20	97	6435	11.36
	101	6455	11.32
	105	6475	11.32
	109	6495	11.35
	113	6515	11.37
802.11ax HE40	99	6445	11.32
	107	6485	11.29
	115	6525	11.31
802.11ax HE80	103	6465	11.39
	119	6545	9.31
802.11ax HE160	111	6505	11.42
802.11be EHT20	97	6435	11.33
	101	6455	11.31
	105	6475	11.33
	109	6495	11.31
	113	6515	11.37
802.11be EHT40	99	6445	11.35
	107	6485	11.29
	115	6525	11.36
802.11be EHT80	103	6465	11.38
	119	6545	9.38
802.11be EHT160	111	6505	11.36

Conducted Power (Tablet mode)			
UNII-6 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	10.38
	101	6455	10.36
	105	6475	10.38
	109	6495	10.37
	113	6515	10.29
802.11ax HE20	97	6435	10.31
	101	6455	10.38
	105	6475	10.38
	109	6495	10.35
	113	6515	10.33
802.11ax HE40	99	6445	10.29
	107	6485	10.34
	115	6525	10.36
802.11ax HE80	103	6465	10.31
	119	6545	9.37
802.11ax HE160	111	6505	10.39
802.11be EHT20	97	6435	10.35
	101	6455	10.37
	105	6475	10.31
	109	6495	10.35
	113	6515	10.31
802.11be EHT40	99	6445	10.35
	107	6485	10.31
	115	6525	10.31
802.11be EHT80	103	6465	10.38
	119	6545	9.36
802.11be EHT160	111	6505	10.37

Conducted Power (Tablet mode)					
UNII-6 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	10.91	10.43	13.69
	101	6455	10.83	10.47	13.66
	105	6475	10.89	10.41	13.67
	109	6495	10.92	10.38	13.67
	113	6515	10.83	10.35	13.61
802.11ax HE20	97	6435	10.88	10.33	13.62
	101	6455	10.86	10.36	13.63
	105	6475	10.87	10.39	13.65
	109	6495	10.91	10.41	13.68
	113	6515	10.85	10.45	13.66
802.11ax HE40	99	6445	10.91	10.48	13.71
	107	6485	10.86	10.48	13.68
	115	6525	10.86	10.43	13.66
802.11ax HE80	103	6465	10.93	10.42	13.69
	119	6545	9.88	9.38	12.65
802.11ax HE160	111	6505	10.89	10.58	13.75
802.11be EHT20	97	6435	10.86	10.37	13.63
	101	6455	10.85	10.29	13.59
	105	6475	10.87	10.31	13.61
	109	6495	10.83	10.39	13.63
	113	6515	10.91	10.35	13.65
802.11be EHT40	99	6445	10.86	10.32	13.61
	107	6485	10.86	10.33	13.61
	115	6525	10.91	10.39	13.67
802.11be EHT80	103	6465	10.89	10.33	13.63
	119	6545	9.87	9.36	12.63
802.11be EHT160	111	6505	10.85	10.35	13.62

Conducted Power (Tablet mode)			
UNII-7 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	9.87
	121	6555	9.79
	125	6575	9.79
	129	6595	9.86
	133	6615	9.88
	137	6635	9.86
	141	6655	9.79
	145	6675	9.83
	149	6695	9.87
	153	6715	9.89
	157	6735	9.83
	161	6755	9.83
	165	6775	9.85
	169	6795	9.89
	173	6815	9.81
	177	6835	9.89
802.11ax HE20	181	6855	9.87
	117	6535	9.89
	121	6555	9.83
	125	6575	9.85
	129	6595	9.88
	133	6615	9.86
	137	6635	9.83
	141	6655	9.81
	145	6675	9.83
	149	6695	9.82
	153	6715	9.89
	157	6735	9.82
	161	6755	9.89
	165	6775	9.87
	169	6795	9.86
	173	6815	9.88
802.11ax HE40	177	6835	9.89
	181	6855	9.79
	123	6565	9.85
	131	6605	9.88
	139	6645	9.82
	147	6685	9.82
	155	6725	9.88
	163	6765	9.83
802.11ax HE80	171	6805	9.81
	179	6845	9.87
	187	6885	9.85
	135	6625	9.79
802.11ax HE160	151	6705	9.81
	167	6785	9.82
	183	6865	9.83
	143	6665	9.98
	175	6825	9.95

Conducted Power (Tablet mode)			
UNII-7 Ant 0_SP			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	117	6535	9.81
	121	6555	9.82
	125	6575	9.83
	129	6595	9.79
	133	6615	9.82
	137	6635	9.81
	141	6655	9.81
	145	6675	9.82
	149	6695	9.78
	153	6715	9.83
	157	6735	9.84
	161	6755	9.83
	165	6775	9.81
	169	6795	9.78
	173	6815	9.82
	177	6835	9.82
802.11be EHT40	181	6855	9.79
	123	6565	9.81
	131	6605	9.83
	139	6645	9.83
	147	6685	9.82
	155	6725	9.83
	163	6765	9.81
	171	6805	9.82
802.11be EHT80	179	6845	9.83
	187	6885	9.82
	135	6625	9.81
	151	6705	9.83
802.11be EHT160	167	6785	9.81
	183	6865	9.83
	143	6665	9.81
	175	6825	9.85

Conducted Power (Tablet mode)			
UNII-7 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	9.86
	121	6555	9.82
	125	6575	9.81
	129	6595	9.83
	133	6615	9.82
	137	6635	9.86
	141	6655	9.85
	145	6675	9.86
	149	6695	9.83
	153	6715	9.86
	157	6735	9.87
	161	6755	9.81
	165	6775	9.82
	169	6795	9.86
	173	6815	9.83
	177	6835	9.83
802.11ax HE20	181	6855	9.81
	117	6535	9.86
	121	6555	9.89
	125	6575	9.79
	129	6595	9.89
	133	6615	9.89
	137	6635	9.88
	141	6655	9.81
	145	6675	9.82
	149	6695	9.83
	153	6715	9.85
	157	6735	9.89
	161	6755	9.89
	165	6775	9.86
	169	6795	9.89
	173	6815	9.86
802.11ax HE40	177	6835	9.83
	181	6855	9.82
	123	6565	9.83
	131	6605	9.86
	139	6645	9.82
	147	6685	9.82
	155	6725	9.89
	163	6765	9.79
802.11ax HE80	171	6805	9.85
	179	6845	9.81
	187	6885	9.81
	135	6625	9.88
802.11ax HE160	151	6705	9.81
	167	6785	9.89
	183	6865	9.87
	143	6665	9.93
	175	6825	9.91

Conducted Power (Tablet mode)			
UNII-7 Ant 1_SP			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	117	6535	9.81
	121	6555	9.79
	125	6575	9.85
	129	6595	9.78
	133	6615	9.86
	137	6635	9.83
	141	6655	9.85
	145	6675	9.81
	149	6695	9.82
	153	6715	9.79
	157	6735	9.82
	161	6755	9.83
	165	6775	9.81
	169	6795	9.82
	173	6815	9.82
	177	6835	9.82
802.11be EHT40	181	6855	9.81
	123	6565	9.83
	131	6605	9.83
	139	6645	9.85
	147	6685	9.81
	155	6725	9.82
	163	6765	9.81
	171	6805	9.81
802.11be EHT80	179	6845	9.82
	187	6885	9.83
	135	6625	9.78
	151	6705	9.79
802.11be EHT160	167	6785	9.82
	183	6865	9.82
	143	6665	9.83
	175	6825	9.87

Conducted Power (Tablet mode)					
UNII-7 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	9.81	9.86	12.85
	121	6555	9.79	9.81	12.81
	125	6575	9.81	9.83	12.83
	129	6595	9.83	9.81	12.83
	133	6615	9.88	9.81	12.86
	137	6635	9.81	9.89	12.86
	141	6655	9.82	9.85	12.85
	145	6675	9.83	9.86	12.86
	149	6695	9.81	9.81	12.82
	153	6715	9.87	9.83	12.86
	157	6735	9.86	9.85	12.87
	161	6755	9.81	9.86	12.85
	165	6775	9.83	9.89	12.87
	169	6795	9.83	9.79	12.82
	173	6815	9.88	9.83	12.87
	177	6835	9.83	9.85	12.85
802.11ax HE20	181	6855	9.87	9.82	12.86
	117	6535	9.81	9.83	12.83
	121	6555	9.81	9.79	12.81
	125	6575	9.81	9.86	12.85
	129	6595	9.83	9.81	12.83
	133	6615	9.85	9.85	12.86
	137	6635	9.87	9.85	12.87
	141	6655	9.86	9.86	12.87
	145	6675	9.87	9.81	12.85
	149	6695	9.79	9.81	12.81
	153	6715	9.85	9.82	12.85
	157	6735	9.79	9.82	12.82
	161	6755	9.82	9.81	12.83
	165	6775	9.81	9.83	12.83
	169	6795	9.89	9.83	12.87
	173	6815	9.87	9.83	12.86
802.11ax HE40	177	6835	9.83	9.86	12.86
	181	6855	9.87	9.81	12.85
	123	6565	9.86	9.81	12.85
	131	6605	9.89	9.82	12.87
	139	6645	9.89	9.82	12.87
	147	6685	9.85	9.83	12.85
	155	6725	9.87	9.82	12.86
	163	6765	9.83	9.83	12.84
802.11ax HE80	171	6805	9.85	9.79	12.83
	179	6845	9.81	9.82	12.83
	187	6885	9.87	9.82	12.86
	135	6625	9.82	9.89	12.87
	151	6705	9.81	9.87	12.85
802.11ax HE160	167	6785	9.87	9.83	12.86
	183	6865	9.86	9.85	12.87
	143	6665	9.78	9.96	12.88
	175	6825	9.68	9.88	12.79

Conducted Power (Tablet mode)					
UNII-7 Ant 0+1_SP					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	117	6535	9.71	9.83	12.78
	121	6555	9.79	9.83	12.82
	125	6575	9.71	9.85	12.79
	129	6595	9.73	9.82	12.79
	133	6615	9.72	9.87	12.81
	137	6635	9.77	9.79	12.79
	141	6655	9.75	9.86	12.82
	145	6675	9.75	9.85	12.81
	149	6695	9.77	9.83	12.81
	153	6715	9.73	9.81	12.78
	157	6735	9.71	9.85	12.79
	161	6755	9.77	9.85	12.82
	165	6775	9.75	9.86	12.82
	169	6795	9.78	9.82	12.81
	173	6815	9.72	9.87	12.81
	177	6835	9.77	9.85	12.82
	181	6855	9.75	9.86	12.82
802.11be EHT40	123	6565	9.71	9.81	12.77
	131	6605	9.75	9.81	12.79
	139	6645	9.79	9.82	12.82
	147	6685	9.76	9.85	12.82
	155	6725	9.75	9.85	12.81
	163	6765	9.71	9.81	12.77
	171	6805	9.73	9.82	12.79
	179	6845	9.73	9.88	12.82
802.11be EHT80	187	6885	9.68	9.87	12.79
	135	6625	9.77	9.76	12.78
	151	6705	9.78	9.83	12.82
	167	6785	9.76	9.83	12.81
802.11be EHT160	183	6865	9.85	9.76	12.82
	143	6665	9.75	9.78	12.78
	175	6825	9.82	9.81	12.83

Conducted Power (Tablet mode)			
UNII-5 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	7.45
	5	5975	7.43
	9	5995	7.28
	13	6015	7.36
	17	6035	7.42
	21	6055	7.41
	25	6075	7.32
	29	6095	7.38
	33	6115	7.31
	37	6135	7.35
	41	6155	7.42
	45	6175	7.46
	49	6195	7.37
	53	6215	7.37
	57	6235	7.41
	61	6255	7.43
	65	6275	7.39
	69	6295	7.38
	73	6315	7.45
	77	6335	7.41
802.11ax HE20	81	6355	7.43
	85	6375	7.42
	89	6395	7.45
	93	6415	7.43
	1	5955	7.36
	5	5975	7.32
	9	5995	7.33
	13	6015	7.32
	17	6035	7.35
	21	6055	7.32
	25	6075	7.31
	29	6095	7.31
	33	6115	7.29
	37	6135	7.29
	41	6155	7.39
	45	6175	7.38
	49	6195	7.29
	53	6215	7.31
	57	6235	7.37
	61	6255	7.29
802.11ax HE40	65	6275	7.32
	69	6295	7.32
	73	6315	7.37
	77	6335	7.35
	81	6355	7.32
	85	6375	7.36
	89	6395	7.39
	93	6415	7.29
	3	5965	9.88
	11	6005	9.81
	19	6045	9.89
	27	6085	9.79
802.11ax HE80	35	6125	9.87
	43	6165	9.83
	51	6205	9.87
	59	6245	9.89
	67	6285	9.82
	75	6325	9.86
802.11ax HE160	83	6365	9.87
	91	6405	9.88
	7	5985	10.38
	23	6065	10.32
	39	6145	10.35
	55	6225	10.33
	71	6305	10.32
	87	6385	10.29
	15	6025	10.33
	47	6185	10.39
	79	6345	10.37

Conducted Power (Tablet mode)			
UNII-5 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	1	5955	7.31
	5	5975	7.38
	9	5995	7.36
	13	6015	7.29
	17	6035	7.39
	21	6055	7.36
	25	6075	7.39
	29	6095	7.32
	33	6115	7.31
	37	6135	7.31
	41	6155	7.38
	45	6175	7.39
	49	6195	7.35
	53	6215	7.36
	57	6235	7.32
	61	6255	7.31
	65	6275	7.37
	69	6295	7.35
	73	6315	7.36
	77	6335	7.37
802.11be EHT40	81	6355	7.35
	85	6375	7.35
	89	6395	7.39
	93	6415	7.29
	3	5965	9.85
	11	6005	9.86
	19	6045	9.88
	27	6085	9.85
	35	6125	9.89
	43	6165	9.83
802.11be EHT80	51	6205	9.85
	59	6245	9.82
	67	6285	9.83
	75	6325	9.83
	83	6365	9.83
	91	6405	9.81
802.11be EHT160	7	5985	10.29
	23	6065	10.35
	39	6145	10.35
	55	6225	10.31
	71	6305	10.37
	87	6385	10.33
	15	6025	10.31
	47	6185	10.39
	79	6345	10.33

Conducted Power (Tablet mode)			
UNII-5 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	7.36
	5	5975	7.38
	9	5995	7.38
	13	6015	7.39
	17	6035	7.32
	21	6055	7.36
	25	6075	7.36
	29	6095	7.29
	33	6115	7.31
	37	6135	7.29
	41	6155	7.35
	45	6175	7.37
	49	6195	7.35
	53	6215	7.29
	57	6235	7.33
	61	6255	7.39
	65	6275	7.37
	69	6295	7.32
	73	6315	7.37
	77	6335	7.36
802.11ax HE20	81	6355	7.29
	85	6375	7.31
	89	6395	7.35
	93	6415	7.36
	1	5955	7.38
	5	5975	7.38
	9	5995	7.29
	13	6015	7.38
	17	6035	7.37
	21	6055	7.35
	25	6075	7.33
	29	6095	7.29
	33	6115	7.39
	37	6135	7.32
	41	6155	7.36
	45	6175	7.32
	49	6195	7.36
	53	6215	7.32
	57	6235	7.33
	61	6255	7.38
802.11ax HE40	65	6275	7.36
	69	6295	7.33
	73	6315	7.37
	77	6335	7.36
	81	6355	7.32
	85	6375	7.38
	89	6395	7.31
	93	6415	7.39
	3	5965	9.85
	11	6005	9.88
	19	6045	9.86
	27	6085	9.79
802.11ax HE80	35	6125	9.83
	43	6165	9.85
	51	6205	9.87
	59	6245	9.88
	67	6285	9.88
	75	6325	9.82
802.11ax HE160	83	6365	9.83
	91	6405	9.87
	7	5985	10.32
802.11ax HE80	23	6065	10.39
	39	6145	10.36
	55	6225	10.31
	71	6305	10.39
	87	6385	10.38
802.11ax HE160	15	6025	10.2
	47	6185	10.41
	79	6345	10.3

Conducted Power (Tablet mode)			
UNII-5 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	1	5955	7.37
	5	5975	7.31
	9	5995	7.31
	13	6015	7.33
	17	6035	7.38
	21	6055	7.38
	25	6075	7.37
	29	6095	7.31
	33	6115	7.32
	37	6135	7.29
	41	6155	7.35
	45	6175	7.36
	49	6195	7.31
	53	6215	7.33
	57	6235	7.37
	61	6255	7.36
	65	6275	7.35
	69	6295	7.37
	73	6315	7.38
	77	6335	7.36
802.11be EHT40	81	6355	7.38
	85	6375	7.32
	89	6395	7.33
	93	6415	7.38
	3	5965	9.85
	11	6005	9.79
	19	6045	9.82
	27	6085	9.81
	35	6125	9.85
	43	6165	9.87
802.11be EHT80	51	6205	9.86
	59	6245	9.83
	67	6285	9.88
	75	6325	9.83
	83	6365	9.88
	91	6405	9.82
802.11be EHT160	7	5985	10.35
	23	6065	10.29
	39	6145	10.36
	55	6225	10.38
	71	6305	10.32
	87	6385	10.29
	15	6025	10.33
	47	6185	10.37
	79	6345	10.38

Conducted Power (Tablet mode)					
UNII-5 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	0.87	1.47	4.19
	5	5975	0.76	1.45	4.13
	9	5995	0.38	1.15	3.79
	13	6015	0.65	1.22	3.95
	17	6035	1.11	1.45	4.29
	21	6055	1.17	1.46	4.33
	25	6075	1.03	1.48	4.27
	29	6095	0.56	1.35	3.98
	33	6115	1.43	1.45	4.45
	37	6135	1.47	1.46	4.48
	41	6155	1.36	1.18	4.28
	45	6175	1.32	1.19	4.27
	49	6195	1.15	1.05	4.11
	53	6215	1.16	0.93	4.06
	57	6235	1.19	0.85	4.03
	61	6255	1.23	0.78	4.02
	65	6275	1.25	0.81	4.05
	69	6295	1.35	0.75	4.07
	73	6315	1.36	0.71	4.06
	77	6335	1.41	0.73	4.09
	81	6355	1.39	1.35	4.38
	85	6375	1.43	1.36	4.41
	89	6395	1.41	1.38	4.41
	93	6415	1.48	1.47	4.49
802.11ax HE20	1	5955	4.36	4.36	7.37
	5	5975	4.37	4.31	7.35
	9	5995	4.32	4.31	7.33
	13	6015	4.37	4.33	7.36
	17	6035	4.39	4.36	7.39
	21	6055	4.35	4.38	7.38
	25	6075	4.39	4.33	7.37
	29	6095	4.36	4.31	7.35
	33	6115	4.37	4.35	7.37
	37	6135	4.31	4.37	7.35
	41	6155	4.35	4.38	7.38
	45	6175	4.29	4.32	7.32
	49	6195	4.38	4.32	7.36
	53	6215	4.37	4.31	7.35
	57	6235	4.35	4.35	7.36
	61	6255	4.31	4.31	7.32
	65	6275	4.33	4.35	7.35
	69	6295	4.29	4.35	7.33
	73	6315	4.33	4.38	7.37
	77	6335	4.33	4.35	7.35
	81	6355	4.35	4.36	7.37
	85	6375	4.33	4.37	7.36
	89	6395	4.35	4.33	7.35
	93	6415	4.42	4.42	7.43
802.11ax HE40	3	5965	7.38	7.33	10.37
	11	6005	7.32	7.39	10.37
	19	6045	7.33	7.36	10.36
	27	6085	7.33	7.36	10.36
	35	6125	7.38	7.31	10.36
	43	6165	7.33	7.35	10.35
	51	6205	7.29	7.38	10.35
	59	6245	7.32	7.29	10.32
	67	6285	7.29	7.35	10.33
	75	6325	7.29	7.36	10.34
	83	6365	7.37	7.32	10.36
	91	6405	7.35	7.33	10.35
802.11ax HE80	7	5985	10.29	10.32	13.32
	23	6065	10.31	10.36	13.35
	39	6145	10.31	10.37	13.35
	55	6225	10.36	10.31	13.35
	71	6305	10.31	10.38	13.36
	87	6385	10.37	10.35	13.37
802.11ax HE160	15	6025	10.38	10.29	13.35
	47	6185	10.37	10.39	13.39
	79	6345	10.31	10.34	13.34

Conducted Power (Tablet mode)					
UNII-5 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	1	5955	4.32	4.36	7.35
	5	5975	4.33	4.31	7.33
	9	5995	4.29	4.35	7.33
	13	6015	4.31	4.39	7.36
	17	6035	4.36	4.36	7.37
	21	6055	4.31	4.36	7.35
	25	6075	4.31	4.39	7.36
	29	6095	4.39	4.33	7.37
	33	6115	4.32	4.38	7.36
	37	6135	4.36	4.37	7.38
	41	6155	4.33	4.31	7.33
	45	6175	4.36	4.36	7.37
	49	6195	4.35	4.33	7.35
	53	6215	4.35	4.32	7.35
	57	6235	4.31	4.38	7.36
	61	6255	4.31	4.33	7.33
	65	6275	4.37	4.32	7.36
	69	6295	4.31	4.38	7.36
	73	6315	4.29	4.35	7.33
	77	6335	4.36	4.36	7.37
	81	6355	4.31	4.36	7.35
	85	6375	4.35	4.38	7.38
	89	6395	4.36	4.33	7.36
	93	6415	4.46	4.43	7.46
802.11be EHT40	3	5965	7.39	7.33	10.37
	11	6005	7.35	7.39	10.38
	19	6045	7.32	7.31	10.33
	27	6085	7.37	7.33	10.36
	35	6125	7.32	7.36	10.35
	43	6165	7.38	7.36	10.38
	51	6205	7.29	7.31	10.31
	59	6245	7.32	7.29	10.32
	67	6285	7.29	7.32	10.32
	75	6325	7.37	7.32	10.36
	83	6365	7.35	7.35	10.36
	91	6405	7.33	7.29	10.32
802.11be EHT80	7	5985	10.31	10.29	13.31
	23	6065	10.36	10.36	13.37
	39	6145	10.31	10.31	13.32
	55	6225	10.31	10.31	13.32
	71	6305	10.35	10.39	13.38
	87	6385	10.32	10.29	13.32
802.11be EHT160	15	6025	10.38	10.31	13.36
	47	6185	10.36	10.33	13.36
	79	6345	10.32	10.31	13.33

Conducted Power (Tablet mode)			
UNII-6 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	7.35
	101	6455	7.32
	105	6475	7.36
	109	6495	7.39
	113	6515	7.29
802.11ax HE20	97	6435	7.36
	101	6455	7.32
	105	6475	7.32
	109	6495	7.35
	113	6515	7.37
802.11ax HE40	99	6445	9.82
	107	6485	9.79
	115	6525	9.81
802.11ax HE80	103	6465	11.39
	119	6545	9.31
802.11ax HE160	111	6505	11.42
802.11be EHT20	97	6435	7.33
	101	6455	7.31
	105	6475	7.33
	109	6495	7.31
	113	6515	7.37
802.11be EHT40	99	6445	9.85
	107	6485	9.79
	115	6525	9.86
802.11be EHT80	103	6465	11.38
	119	6545	9.38
802.11be EHT160	111	6505	11.36

Conducted Power (Tablet mode)			
UNII-6 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	7.38
	101	6455	7.36
	105	6475	7.38
	109	6495	7.37
	113	6515	7.29
802.11ax HE20	97	6435	7.31
	101	6455	7.38
	105	6475	7.38
	109	6495	7.35
	113	6515	7.33
802.11ax HE40	99	6445	9.29
	107	6485	9.34
	115	6525	9.36
802.11ax HE80	103	6465	10.31
	119	6545	9.37
802.11ax HE160	111	6505	10.39
802.11be EHT20	97	6435	6.35
	101	6455	6.37
	105	6475	6.31
	109	6495	6.35
	113	6515	6.31
802.11be EHT40	99	6445	9.35
	107	6485	9.31
	115	6525	9.31
802.11be EHT80	103	6465	10.38
	119	6545	9.36
802.11be EHT160	111	6505	10.37

Conducted Power (Tablet mode)					
UNII-6 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	1.91	1.43	4.69
	101	6455	1.83	1.47	4.66
	105	6475	1.89	1.41	4.67
	109	6495	1.92	1.38	4.67
	113	6515	1.83	1.35	4.61
802.11ax HE20	97	6435	4.38	3.83	7.12
	101	6455	4.36	3.86	7.13
	105	6475	4.37	3.89	7.15
	109	6495	4.41	3.91	7.18
	113	6515	4.35	3.95	7.16
802.11ax HE40	99	6445	7.41	6.98	10.21
	107	6485	7.36	6.98	10.18
	115	6525	7.36	6.93	10.16
802.11ax HE80	103	6465	10.43	9.92	13.19
	119	6545	9.88	9.38	12.65
802.11ax HE160	111	6505	10.89	10.58	13.75
802.11be EHT20	97	6435	4.36	3.87	7.13
	101	6455	4.35	3.79	7.09
	105	6475	4.37	3.81	7.11
	109	6495	4.33	3.89	7.13
	113	6515	4.41	3.85	7.15
802.11be EHT40	99	6445	7.36	6.82	10.11
	107	6485	7.36	6.83	10.11
	115	6525	7.41	6.89	10.17
802.11be EHT80	103	6465	10.39	9.83	13.13
	119	6545	9.87	9.36	12.63
802.11be EHT160	111	6505	10.85	10.35	13.62

Conducted Power (Tablet mode)			
UNII-7 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	7.37
	121	6555	7.29
	125	6575	7.29
	129	6595	7.36
	133	6615	7.38
	137	6635	7.36
	141	6655	7.29
	145	6675	7.33
	149	6695	7.37
	153	6715	7.39
	157	6735	7.33
	161	6755	7.33
	165	6775	7.35
	169	6795	7.39
	173	6815	7.31
	177	6835	7.39
	181	6855	7.37
802.11ax HE20	117	6535	7.39
	121	6555	7.33
	125	6575	7.35
	129	6595	7.38
	133	6615	7.36
	137	6635	7.33
	141	6655	7.31
	145	6675	7.33
	149	6695	7.32
	153	6715	7.39
	157	6735	7.32
	161	6755	7.39
	165	6775	7.37
	169	6795	7.36
	173	6815	7.38
	177	6835	7.39
	181	6855	7.29
802.11ax HE40	123	6565	9.85
	131	6605	9.88
	139	6645	9.82
	147	6685	9.82
	155	6725	9.88
	163	6765	9.83
	171	6805	9.81
	179	6845	9.87
802.11ax HE80	187	6885	9.85
	135	6625	9.79
	151	6705	9.81
	167	6785	9.82
802.11ax HE160	183	6865	9.83
	143	6665	9.98
	175	6825	9.95

Conducted Power (Tablet mode)			
UNII-7 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11be EHT20	117	6535	7.31
	121	6555	7.32
	125	6575	7.33
	129	6595	7.29
	133	6615	7.32
	137	6635	7.31
	141	6655	7.31
	145	6675	7.32
	149	6695	7.28
	153	6715	7.33
	157	6735	7.34
	161	6755	7.33
	165	6775	7.31
	169	6795	7.28
	173	6815	7.32
	177	6835	7.32
802.11be EHT40	181	6855	7.29
	123	6565	9.81
	131	6605	9.83
	139	6645	9.83
	147	6685	9.82
	155	6725	9.83
	163	6765	9.81
	171	6805	9.82
802.11be EHT80	179	6845	9.83
	187	6885	9.82
	135	6625	9.81
	151	6705	9.83
802.11be EHT160	167	6785	9.81
	183	6865	9.83
	143	6665	9.81
	175	6825	9.85

Conducted Power (Tablet mode)			
UNII-7 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	7.36
	121	6555	7.32
	125	6575	7.31
	129	6595	7.33
	133	6615	7.32
	137	6635	7.36
	141	6655	7.35
	145	6675	7.36
	149	6695	7.33
	153	6715	7.36
	157	6735	7.37
	161	6755	7.31
	165	6775	7.32
	169	6795	7.36
	173	6815	7.33
	177	6835	7.33
	181	6855	7.31
802.11ax HE20	117	6535	7.36
	121	6555	7.39
	125	6575	7.29
	129	6595	7.39
	133	6615	7.39
	137	6635	7.38
	141	6655	7.31
	145	6675	7.32
	149	6695	7.33
	153	6715	7.35
	157	6735	7.39
	161	6755	7.39
	165	6775	7.36
	169	6795	7.39
	173	6815	7.36
	177	6835	7.33
	181	6855	7.32
802.11ax HE40	123	6565	9.83
	131	6605	9.86
	139	6645	9.82
	147	6685	9.82
	155	6725	9.89
	163	6765	9.79
	171	6805	9.85
	179	6845	9.81
802.11ax HE80	187	6885	9.81
	135	6625	9.88
	151	6705	9.81
	167	6785	9.89
802.11ax HE160	183	6865	9.87
	143	6665	9.93
	175	6825	9.91

Conducted Power (Tablet mode)			
UNII-7 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11be EHT20	117	6535	7.31
	121	6555	7.29
	125	6575	7.35
	129	6595	7.28
	133	6615	7.36
	137	6635	7.33
	141	6655	7.35
	145	6675	7.31
	149	6695	7.32
	153	6715	7.29
	157	6735	7.32
	161	6755	7.33
	165	6775	7.31
	169	6795	7.32
	173	6815	7.32
	177	6835	7.32
	181	6855	7.31
802.11be EHT40	123	6565	9.83
	131	6605	9.83
	139	6645	9.85
	147	6685	9.81
	155	6725	9.82
	163	6765	9.81
	171	6805	9.81
	179	6845	9.82
802.11be EHT80	187	6885	9.83
	135	6625	9.78
	151	6705	9.79
	167	6785	9.82
802.11be EHT160	183	6865	9.82
	143	6665	9.83
	175	6825	9.87

Conducted Power (Tablet mode)					
UNII-7 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	1.31	1.36	4.35
	121	6555	1.29	1.31	4.31
	125	6575	1.31	1.33	4.33
	129	6595	1.33	1.31	4.33
	133	6615	1.38	1.31	4.36
	137	6635	1.31	1.39	4.36
	141	6655	1.32	1.35	4.35
	145	6675	1.33	1.36	4.36
	149	6695	1.31	1.31	4.32
	153	6715	1.37	1.33	4.36
	157	6735	1.36	1.35	4.37
	161	6755	1.31	1.36	4.35
	165	6775	1.33	1.39	4.37
	169	6795	1.33	1.29	4.32
	173	6815	1.38	1.33	4.37
	177	6835	1.33	1.35	4.35
	181	6855	1.37	1.32	4.36
802.11ax HE20	117	6535	4.31	4.33	7.33
	121	6555	4.31	4.29	7.31
	125	6575	4.31	4.36	7.35
	129	6595	4.33	4.31	7.33
	133	6615	4.35	4.35	7.36
	137	6635	4.37	4.35	7.37
	141	6655	4.36	4.36	7.37
	145	6675	4.37	4.31	7.35
	149	6695	4.29	4.31	7.31
	153	6715	4.35	4.32	7.35
	157	6735	4.29	4.32	7.32
	161	6755	4.32	4.31	7.33
	165	6775	4.31	4.33	7.33
	169	6795	4.39	4.33	7.37
	173	6815	4.37	4.33	7.36
	177	6835	4.33	4.36	7.36
	181	6855	4.37	4.31	7.35
802.11ax HE40	123	6565	7.36	7.31	10.35
	131	6605	7.39	7.32	10.37
	139	6645	7.39	7.32	10.37
	147	6685	7.35	7.33	10.35
	155	6725	7.37	7.32	10.36
	163	6765	7.33	7.33	10.34
	171	6805	7.35	7.29	10.33
	179	6845	7.31	7.32	10.33
802.11ax HE80	187	6885	7.37	7.32	10.36
	135	6625	9.82	9.89	12.87
	151	6705	9.81	9.87	12.85
	167	6785	9.87	9.83	12.86
802.11ax HE160	183	6865	9.86	9.85	12.87
	143	6665	9.78	9.96	12.88
	175	6825	9.68	9.88	12.79

Conducted Power (Tablet mode)					
UNII-7 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11be EHT20	117	6535	4.21	4.33	7.28
	121	6555	4.29	4.33	7.32
	125	6575	4.21	4.35	7.29
	129	6595	4.23	4.32	7.29
	133	6615	4.22	4.37	7.31
	137	6635	4.27	4.29	7.29
	141	6655	4.25	4.36	7.32
	145	6675	4.25	4.35	7.31
	149	6695	4.27	4.33	7.31
	153	6715	4.23	4.31	7.28
	157	6735	4.21	4.35	7.29
	161	6755	4.27	4.35	7.32
	165	6775	4.25	4.36	7.32
	169	6795	4.28	4.32	7.31
	173	6815	4.22	4.37	7.31
	177	6835	4.27	4.35	7.32
	181	6855	4.25	4.36	7.32
802.11be EHT40	123	6565	7.21	7.31	10.27
	131	6605	7.25	7.31	10.29
	139	6645	7.29	7.32	10.32
	147	6685	7.26	7.35	10.32
	155	6725	7.25	7.35	10.31
	163	6765	7.21	7.31	10.27
	171	6805	7.23	7.32	10.29
	179	6845	7.23	7.38	10.32
802.11be EHT80	187	6885	7.18	7.37	10.29
	135	6625	9.77	9.76	12.78
	151	6705	9.78	9.83	12.82
	167	6785	9.76	9.83	12.81
802.11be EHT160	183	6865	9.85	9.76	12.82
	143	6665	9.75	9.78	12.78
	175	6825	9.82	9.81	12.83

Conducted Power (Tablet mode)			
UNII-8 Ant 0_LPI			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	185	6875	7.32
	189	6895	7.33
	193	6915	7.31
	197	6935	7.35
	201	6955	7.31
	205	6975	7.35
	209	6995	7.31
	213	7015	7.32
	217	7035	7.25
	221	7055	7.33
	225	7075	7.32
	229	7095	7.31
	233	7115	7.28
802.11ax HE20	185	6875	7.31
	189	6895	7.25
	193	6915	7.33
	197	6935	7.29
	201	6955	7.35
	205	6975	7.27
	209	6995	7.27
	213	7015	7.33
	217	7035	7.32
	221	7055	7.34
	225	7075	7.33
	229	7095	7.32
	233	7115	7.31
802.11ax HE40	195	6925	9.75
	203	6965	9.83
	211	7005	9.81
	219	7045	9.83
	227	7085	9.82
802.11ax HE80	199	6945	9.86
	215	7025	9.82
802.11ax HE160	207	6985	9.93
802.11be EHT20	185	6875	7.32
	189	6895	7.29
	193	6915	7.35
	197	6935	7.29
	201	6955	7.33
	205	6975	7.33
	209	6995	7.26
	213	7015	7.32
	217	7035	7.27
	221	7055	7.31
	225	7075	7.26
	229	7095	7.31
	233	7115	7.33
802.11be EHT40	195	6925	9.82
	203	6965	9.76
	211	7005	9.78
	219	7045	9.85
	227	7085	9.85
802.11be EHT80	199	6945	9.86
	215	7025	9.86
802.11be EHT160	207	6985	9.77

Conducted Power (Tablet mode)			
UNII-8 Ant 1_LPI			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	185	6875	7.27
	189	6895	7.31
	193	6915	7.26
	197	6935	7.27
	201	6955	7.35
	205	6975	7.32
	209	6995	7.27
	213	7015	7.26
	217	7035	7.25
	221	7055	7.27
	225	7075	7.35
	229	7095	7.26
	233	7115	7.27
802.11ax HE20	185	6875	7.26
	189	6895	7.25
	193	6915	7.32
	197	6935	7.28
	201	6955	7.28
	205	6975	7.35
	209	6995	7.27
	213	7015	7.27
	217	7035	7.31
	221	7055	7.34
	225	7075	7.29
	229	7095	7.27
	233	7115	7.25
802.11ax HE40	195	6925	9.76
	203	6965	9.75
	211	7005	9.79
	219	7045	9.82
	227	7085	9.75
802.11ax HE80	199	6945	9.79
	215	7025	9.75
802.11ax HE160	207	6985	9.95
802.11be EHT20	185	6875	7.32
	189	6895	7.33
	193	6915	7.32
	197	6935	7.31
	201	6955	7.35
	205	6975	7.27
	209	6995	7.31
	213	7015	7.33
	217	7035	7.33
	221	7055	7.36
	225	7075	7.32
	229	7095	7.32
	233	7115	7.29
802.11be EHT40	195	6925	9.82
	203	6965	9.77
	211	7005	9.83
	219	7045	9.79
	227	7085	9.79
802.11be EHT80	199	6945	9.75
	215	7025	9.79
802.11be EHT160	207	6985	9.76

Conducted Power (Tablet mode)					
UNII-8 Ant 0+1_LPI					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	185	6875	1.82	1.78	4.81
	189	6895	1.79	1.85	4.83
	193	6915	1.76	1.86	4.82
	197	6935	1.77	1.85	4.82
	201	6955	1.81	1.81	4.82
	205	6975	1.81	1.81	4.82
	209	6995	1.82	1.81	4.83
	213	7015	1.81	1.81	4.82
	217	7035	1.83	1.79	4.82
	221	7055	1.75	1.76	4.77
	225	7075	1.82	1.79	4.82
	229	7095	1.76	1.83	4.81
	233	7115	1.79	1.82	4.82
	185	6875	4.28	4.33	7.32
802.11ax HE20	189	6895	4.31	4.33	7.33
	193	6915	4.28	4.27	7.29
	197	6935	4.28	4.31	7.31
	201	6955	4.26	4.33	7.31
	205	6975	4.29	4.25	7.28
	209	6995	4.28	4.33	7.32
	213	7015	4.28	4.28	7.29
	217	7035	4.28	4.28	7.29
	221	7055	4.35	4.29	7.33
	225	7075	4.29	4.31	7.31
	229	7095	4.29	4.31	7.31
	233	7115	4.33	4.29	7.32
	195	6925	7.33	7.29	10.32
	203	6965	7.32	7.23	10.29
802.11ax HE40	211	7005	7.26	7.33	10.31
	219	7045	7.28	7.25	10.28
	227	7085	7.31	7.29	10.31
	199	6945	9.82	9.81	12.83
802.11ax HE80	215	7025	9.81	9.75	12.79
802.11ax HE160	207	6985	9.78	9.92	12.86
802.11be EHT20	185	6875	4.28	4.25	7.28
	189	6895	4.29	4.33	7.32
	193	6915	4.35	4.32	7.35
	197	6935	4.26	4.29	7.29
	201	6955	4.32	4.31	7.33
	205	6975	4.25	4.29	7.28
	209	6995	4.25	4.26	7.27
	213	7015	4.33	4.27	7.31
	217	7035	4.35	4.32	7.35
	221	7055	4.31	4.33	7.33
	225	7075	4.33	4.27	7.31
	229	7095	4.33	4.27	7.31
	233	7115	4.32	4.32	7.33
	195	6925	7.27	7.35	10.32
	203	6965	7.31	7.28	10.31
802.11be EHT40	211	7005	7.29	7.33	10.32
	219	7045	7.35	7.33	10.35
	227	7085	7.26	7.33	10.31
	199	6945	9.81	9.82	12.83
802.11be EHT80	215	7025	9.79	9.76	12.79
802.11be EHT160	207	6985	9.79	9.82	12.82

Appendix F. SAR and Incident Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN / BT was performed on the maximum power mode.
2. SAR testing for LTE was performed on the maximum power mode.
3. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
4. Per KDB 388624 APPENDIX OVER6G, the minimum of 5 channels to perform IPD across U-NII 5,6,7 and 8 and measured results were scaled by factor 1.545 to reported power density when measurement uncertainty exceed 30%.



Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant. Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMCI2.2K	Bottom of Laptop	0	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	0	<0.001	0.00
	WCDMA II	RMCI2.2K	Rear Face of Tablet	0	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	0.12	0.124	0.18
	WCDMA II	RMCI2.2K	Left Side of Tablet	0	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	-0.09	0.151	0.22
	WCDMA II	RMCI2.2K	Right Side of Tablet	0	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	0.03	0.417	0.60
	WCDMA II	RMCI2.2K	Top Side of Tablet	10	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	0.17	0.572	0.82
	WCDMA II	RMCI2.2K	Bottom Side of Tablet	0	9538			WNC	Main Ant 0	w/o	-	1.00	25.00	23.45	1.43	0.05	0.087	0.12
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9538			WNC	Main Ant 0	w/	-	1.00	20.00	19.92	1.02	0.08	0.877	0.89
	WCDMA II	RMCI2.2K	Top Side of Tablet	10	9262			WNC	Main Ant 0	w/o	-	1.00	25.00	23.23	1.50	0.02	0.534	0.80
	WCDMA II	RMCI2.2K	Top Side of Tablet	10	9400			WNC	Main Ant 0	w/o	-	1.00	25.00	23.26	1.49	-0.11	0.585	0.87
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9262			WNC	Main Ant 0	w/	-	1.00	20.00	19.62	1.09	-0.03	0.811	0.88
1	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9400			WNC	Main Ant 0	w/	-	1.00	20.00	19.68	1.08	0.03	0.906	0.98
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9400			Auden	Main Ant 0	w/	-	1.00	20.00	19.68	1.08	0.07	0.847	0.91
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9262			Auden	Main Ant 0	w/	-	1.00	20.00	19.62	1.09	0.07	0.818	0.89
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9538			Auden	Main Ant 0	w/	-	1.00	20.00	19.92	1.02	-0.13	0.826	0.84
	WCDMA II	RMCI2.2K	Top Side of Tablet	0	9400			WNC	Main Ant 0	w/	-	1.00	20.00	19.68	1.08	-0.18	0.867	0.94
	WCDMA IV	RMCI2.2K	Bottom of Laptop	0	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	0	<0.001	0.00
	WCDMA IV	RMCI2.2K	Rear Face of Tablet	0	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.19	0.087	0.11
	WCDMA IV	RMCI2.2K	Left Side of Tablet	0	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	0.06	0.105	0.14
	WCDMA IV	RMCI2.2K	Right Side of Tablet	0	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.18	0.292	0.39
	WCDMA IV	RMCI2.2K	Top Side of Tablet	10	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.15	0.4	0.53
	WCDMA IV	RMCI2.2K	Bottom Side of Tablet	0	1513			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.11	0.061	0.08
	WCDMA IV	RMCI2.2K	Top Side of Tablet	0	1513			WNC	Main Ant 0	w/	-	1.00	20.50	20.23	1.06	-0.12	0.802	0.85
	WCDMA IV	RMCI2.2K	Top Side of Tablet	0	1312			WNC	Main Ant 0	w/	-	1.00	20.50	19.97	1.13	-0.16	0.726	0.82
2	WCDMA IV	RMCI2.2K	Top Side of Tablet	0	1413			WNC	Main Ant 0	w/	-	1.00	20.50	20.06	1.11	0.02	0.817	0.91
	WCDMA IV	RMCI2.2K	Top Side of Tablet	0	1413			Auden	Main Ant 0	w/	-	1.00	20.50	20.06	1.11	0.15	0.713	0.79
	WCDMA IV	RMCI2.2K	Top Side of Tablet	0	1413			WNC	Main Ant 0	w/	-	1.00	20.50	20.06	1.11	0.05	0.803	0.89
	WCDMA V	RMCI2.2K	Bottom of Laptop	0	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	0	<0.001	0.00
	WCDMA V	RMCI2.2K	Rear Face of Tablet	0	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	0.18	0.091	0.12
	WCDMA V	RMCI2.2K	Left Side of Tablet	0	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.12	0.056	0.07
	WCDMA V	RMCI2.2K	Right Side of Tablet	0	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.11	0.425	0.56
	WCDMA V	RMCI2.2K	Top Side of Tablet	10	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	0.08	0.501	0.66
	WCDMA V	RMCI2.2K	Bottom Side of Tablet	0	4132			WNC	Main Ant 0	w/o	-	1.00	25.00	23.81	1.32	-0.1	0.088	0.12
3	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4132			WNC	Main Ant 0	w/	-	1.00	20.00	19.21	1.20	0.01	0.812	0.97
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4182			WNC	Main Ant 0	w/	-	1.00	20.00	19.11	1.23	-0.08	0.754	0.93
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4233			WNC	Main Ant 0	w/	-	1.00	20.00	19.04	1.25	-0.18	0.732	0.92
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4132			Auden	Main Ant 0	w/	-	1.00	20.00	19.21	1.20	0.1	0.764	0.92
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4182			Auden	Main Ant 0	w/	-	1.00	20.00	19.11	1.23	0.05	0.742	0.91
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4233			Auden	Main Ant 0	w/	-	1.00	20.00	19.04	1.25	-0.03	0.735	0.92
	WCDMA V	RMCI2.2K	Top Side of Tablet	0	4132			WNC	Main Ant 0	w/	-	1.00	20.00	19.21	1.20	-0.05	0.806	0.97
	LTE 5	QPSK10M	Bottom of Laptop	0	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	0	<0.001	0.00
	LTE 5	QPSK10M	Bottom of Laptop	0	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	0	<0.001	0.00
	LTE 5	QPSK10M	Rear Face of Tablet	0	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	0.1	0.097	0.13
	LTE 5	QPSK10M	Left Side of Tablet	0	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	-0.17	0.06	0.08
	LTE 5	QPSK10M	Right Side of Tablet	0	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	-0.09	0.45	0.62
	LTE 5	QPSK10M	Top Side of Tablet	10	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	0.01	0.53	0.73
	LTE 5	QPSK10M	Bottom Side of Tablet	0	20525	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.11	1.38	-0.16	0.093	0.13
	LTE 5	QPSK10M	Rear Face of Tablet	0	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	0.08	0.093	0.13
	LTE 5	QPSK10M	Left Side of Tablet	0	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	-0.09	0.058	0.08
	LTE 5	QPSK10M	Right Side of Tablet	0	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	0.15	0.435	0.59
	LTE 5	QPSK10M	Top Side of Tablet	10	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	0.15	0.512	0.70
	LTE 5	QPSK10M	Bottom Side of Tablet	0	20525	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.16	1.36	0.13	0.09	0.12
4	LTE 5	QPSK10M	Top Side of Tablet	0	20525	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.81	1.32	-0.01	0.81	1.07
	LTE 5	QPSK10M	Top Side of Tablet	0	20525	25	0	WNC	Main Ant 0	w/	-	1.00	19.00	17.76	1.33	0.04	0.783	1.04
	LTE 5	QPSK10M	Top Side of Tablet	0	20525	50	0	WNC	Main Ant 0	w/	-	1.00	19.00	17.78	1.32	-0.07	0.768	1.01
	LTE 5	QPSK10M	Top Side of Tablet	0	20450	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.62	1.37	0.19	0.775	1.06
	LTE 5	QPSK10M	Top Side of Tablet	0	20600	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.69	1.35	0.01	0.765	1.03
	LTE 5	QPSK10M	Top Side of Tablet	0	20450	25	0	WNC	Main Ant 0	w/	-	1.00	19.00	17.57	1.39	-0.08	0.698	0.97
	LTE 5	QPSK10M	Top Side of Tablet	0	20600	25	0	WNC	Main Ant 0	w/	-	1.00	19.00	17.64	1.37	-0.08	0.689	0.94
	LTE 5	QPSK10M	Top Side of Tablet	0	PCC: 20450 SCC: 20549	PCC: 1 SCC: 1	PCC: 49 SCC: 0	WNC	Main Ant 0	w/	-	1.00	20.00	18.16	1.53	-0.04	0.667	1.02
	LTE 5	QPSK10M	Top Side of Tablet	0	PCC: 20476 SCC: 20575	PCC: 1 SCC: 1	PCC: 49 SCC: 0	WNC	Main Ant 0	w/	-	1.00	20.00	18.12	1.54	-0.01	0.654	1.01
	LTE 5	QPSK10M	Top Side of Tablet	0	PCC: 20501 SCC: 20600	PCC: 1 SCC: 1	PCC: 49 SCC: 0	WNC	Main Ant 0	w/	-	1.00	20.00	18.04	1.57	-0.02	0.649	1.02
	LTE 5	QPSK10M	Top Side of Tablet	0	20525	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	18.81	1.32	0.18	0.78	1.03
	LTE 5	QPSK10M	Top Side of Tablet	0	20450	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	18.62	1.37	0.07	0.729	1.00
	LTE 5	QPSK10M	Top Side of Tablet	0	20600	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	18.69	1.35	-0.11	0.742	1.00
	LTE 5	QPSK10M	Top Side of Tablet	0	20525	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.81	1.32	0.06	0.797	1.05



BUREAU
VERITAS

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant. Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 7	QPSK20M	Bottom of Laptop	0	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom of Laptop	0	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	0	<0.001	0.00
	LTE 7	QPSK20M	Rear Face of Tablet	0	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	0.12	0.126	0.16
	LTE 7	QPSK20M	Left Side of Tablet	0	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	-0.01	0.04	0.05
	LTE 7	QPSK20M	Right Side of Tablet	0	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	-0.02	0.142	0.18
	LTE 7	QPSK20M	Top Side of Tablet	10	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	0.04	0.165	0.21
	LTE 7	QPSK20M	Bottom Side of Tablet	0	21100	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.37	1.30	0.13	0.299	0.39
	LTE 7	QPSK20M	Rear Face of Tablet	0	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	-0.03	0.103	0.13
	LTE 7	QPSK20M	Left Side of Tablet	0	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	-0.17	0.038	0.05
	LTE 7	QPSK20M	Right Side of Tablet	0	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	0.04	0.347	0.44
	LTE 7	QPSK20M	Top Side of Tablet	10	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	-0.04	0.137	0.18
	LTE 7	QPSK20M	Bottom Side of Tablet	0	21100	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.42	1.28	-0.1	0.247	0.32
	LTE 7	QPSK20M	Top Side of Tablet	0	21100	1	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.89	1.03	0.05	0.516	0.53
	LTE 7	QPSK20M	Top Side of Tablet	0	21100	50	0	WNC	Main Ant 0	w/	-	1.00	18.00	17.84	1.04	0.06	0.511	0.53
	LTE 7	QPSK20M	Top Side of Tablet	0	20850	1	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.72	1.07	-0.11	0.49	0.52
5	LTE 7	QPSK20M	Top Side of Tablet	0	21350	1	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.82	1.04	0.01	0.535	0.56
	LTE 7	QPSK20M	Top Side of Tablet	0	PCC: 21152 SCC: 21350	PCC: 1 SCC: 1	PCC: 99 SCC: 0	WNC	Main Ant 0	w/	-	1.00	19.00	17.13	1.54	-0.04	0.324	0.50
	LTE 7	QPSK20M	Top Side of Tablet	0	21350	1	0	Auden	Main Ant 0	w/	-	1.00	19.00	18.82	1.04	-0.09	0.5	0.52
	LTE 12	QPSK10M	Bottom of Laptop	0	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom of Laptop	0	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	0	<0.001	0.00
	LTE 12	QPSK10M	Rear Face of Tablet	0	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	-0.09	0.063	0.08
	LTE 12	QPSK10M	Left Side of Tablet	0	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	-0.06	0.038	0.05
	LTE 12	QPSK10M	Right Side of Tablet	0	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	-0.15	0.293	0.38
	LTE 12	QPSK10M	Top Side of Tablet	10	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	-0.02	0.346	0.45
	LTE 12	QPSK10M	Bottom Side of Tablet	0	23130	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.35	1.30	-0.11	0.061	0.08
	LTE 12	QPSK10M	Rear Face of Tablet	0	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	0.13	0.061	0.08
	LTE 12	QPSK10M	Left Side of Tablet	0	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	0.09	0.037	0.05
	LTE 12	QPSK10M	Right Side of Tablet	0	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	0.15	0.282	0.36
	LTE 12	QPSK10M	Top Side of Tablet	10	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	-0.12	0.333	0.43
	LTE 12	QPSK10M	Bottom Side of Tablet	0	23130	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.40	1.29	0.16	0.058	0.07
	LTE 12	QPSK10M	Top Side of Tablet	0	23130	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	21.76	1.19	-0.09	0.891	1.06
	LTE 12	QPSK10M	Top Side of Tablet	0	23130	25	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.71	1.20	-0.18	0.849	1.02
	LTE 12	QPSK10M	Top Side of Tablet	0	23130	50	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.73	1.19	0.04	0.778	0.93
6	LTE 12	QPSK10M	Top Side of Tablet	0	23060	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	21.49	1.26	0.02	0.924	1.16
	LTE 12	QPSK10M	Top Side of Tablet	0	23095	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	21.59	1.23	0.11	0.907	1.12
	LTE 12	QPSK10M	Top Side of Tablet	0	23060	25	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.44	1.28	0.13	0.88	1.13
	LTE 12	QPSK10M	Top Side of Tablet	0	23095	25	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.54	1.25	-0.07	0.863	1.08
	LTE 12	QPSK10M	Top Side of Tablet	0	23060	1	0	Auden	Main Ant 0	w/	-	1.00	22.50	21.49	1.26	-0.02	0.882	1.11
	LTE 12	QPSK10M	Top Side of Tablet	0	23095	1	0	Auden	Main Ant 0	w/	-	1.00	22.50	21.59	1.23	0.18	0.853	1.05
	LTE 12	QPSK10M	Top Side of Tablet	0	23130	1	0	Auden	Main Ant 0	w/	-	1.00	22.50	21.76	1.19	-0.19	0.851	1.01
	LTE 12	QPSK10M	Top Side of Tablet	0	23060	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	21.49	1.26	-0.11	0.917	1.16
	LTE 13	QPSK10M	Bottom of Laptop	0	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom of Laptop	0	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	0	<0.001	0.00
	LTE 13	QPSK10M	Rear Face of Tablet	0	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	0.18	0.071	0.10
	LTE 13	QPSK10M	Left Side of Tablet	0	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	-0.17	0.044	0.06
	LTE 13	QPSK10M	Right Side of Tablet	0	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	-0.15	0.332	0.46
	LTE 13	QPSK10M	Top Side of Tablet	10	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	0.01	0.391	0.54
	LTE 13	QPSK10M	Bottom Side of Tablet	0	23230	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.06	1.39	-0.05	0.069	0.10
	LTE 13	QPSK10M	Rear Face of Tablet	0	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	0.03	0.068	0.09
	LTE 13	QPSK10M	Left Side of Tablet	0	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	-0.02	0.042	0.06
	LTE 13	QPSK10M	Right Side of Tablet	0	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	0.19	0.319	0.44
	LTE 13	QPSK10M	Top Side of Tablet	10	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	0.05	0.377	0.52
	LTE 13	QPSK10M	Bottom Side of Tablet	0	23230	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.11	1.38	-0.04	0.066	0.09
7	LTE 13	QPSK10M	Top Side of Tablet	0	23230	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	22.48	1.00	0.02	1.1	1.10
	LTE 13	QPSK10M	Top Side of Tablet	0	23230	25	0	WNC	Main Ant 0	w/	-	1.00	21.50	21.43	1.02	0.14	1.05	1.07
	LTE 13	QPSK10M	Top Side of Tablet	0	23230	50	0	WNC	Main Ant 0	w/	-	1.00	21.50	21.45	1.01	0.13	0.94	0.95
	LTE 13	QPSK10M	Top Side of Tablet	0	23230	1	0	Auden	Main Ant 0	w/	-	1.00	22.50	22.48	1.00	-0.15	1.03	1.03
	LTE 13	QPSK10M	Top Side of Tablet	0	23230	1	0	WNC	Main Ant 0	w/	-	1.00	22.50	22.48	1.00	-0.05	1.06	1.06
	LTE 14	QPSK10M	Bottom of Laptop	0	23330	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	23.84	1.47	0	<0.001	0.00
	LTE 14	QPSK10M	Bottom of Laptop	0	23330	25	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.89	1.45			



BUREAU
VERITAS

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant. Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 26	QPSK15M	Bottom of Laptop	0	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	0	<0.001	0.00
	LTE 26	QPSK15M	Bottom of Laptop	0	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	0	<0.001	0.00
	LTE 26	QPSK15M	Rear Face of Tablet	0	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	0.19	0.082	0.10
	LTE 26	QPSK15M	Left Side of Tablet	0	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	0.06	0.051	0.07
	LTE 26	QPSK15M	Right Side of Tablet	0	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	0.03	0.385	0.49
	LTE 26	QPSK15M	Top Side of Tablet	10	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	-0.05	0.454	0.58
	LTE 26	QPSK15M	Bottom Side of Tablet	0	26965	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.44	1.28	-0.14	0.08	0.10
	LTE 26	QPSK15M	Rear Face of Tablet	0	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	0.08	0.079	0.10
	LTE 26	QPSK15M	Left Side of Tablet	0	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	0.16	0.049	0.06
	LTE 26	QPSK15M	Right Side of Tablet	0	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	-0.03	0.37	0.47
	LTE 26	QPSK15M	Top Side of Tablet	10	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	-0.06	0.436	0.55
	LTE 26	QPSK15M	Bottom Side of Tablet	0	26965	36	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.49	1.26	-0.06	0.076	0.10
	LTE 26	QPSK15M	Top Side of Tablet	0	26965	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.89	1.03	0.03	0.923	0.95
	LTE 26	QPSK15M	Top Side of Tablet	0	26965	36	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.84	1.04	-0.08	0.887	0.92
	LTE 26	QPSK15M	Top Side of Tablet	0	26965	75	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.86	1.03	0.01	0.881	0.91
	LTE 26	QPSK15M	Top Side of Tablet	0	26765	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.85	1.04	0.14	0.941	0.98
10	LTE 26	QPSK15M	Top Side of Tablet	0	26865	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.84	1.04	-0.01	0.979	1.02
	LTE 26	QPSK15M	Top Side of Tablet	0	26765	36	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.80	1.05	-0.04	0.904	0.95
	LTE 26	QPSK15M	Top Side of Tablet	0	26865	36	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.79	1.05	-0.06	0.941	0.99
	LTE 26	QPSK15M	Top Side of Tablet	0	26865	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	19.84	1.04	0.14	0.923	0.96
	LTE 26	QPSK15M	Top Side of Tablet	0	26765	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	19.85	1.04	-0.05	0.907	0.94
	LTE 26	QPSK15M	Top Side of Tablet	0	26965	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	19.89	1.03	-0.18	0.913	0.94
	LTE 26	QPSK15M	Top Side of Tablet	0	26865	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.84	1.04	-0.04	0.968	1.01
	LTE 38	QPSK20M	Bottom of Laptop	0	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom of Laptop	0	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	0	<0.001	0.00
	LTE 38	QPSK20M	Rear Face of Tablet	0	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	-0.08	0.106	0.15
	LTE 38	QPSK20M	Left Side of Tablet	0	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side of Tablet	0	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	0.17	0.355	0.51
	LTE 38	QPSK20M	Top Side of Tablet	10	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	-0.17	0.14	0.20
	LTE 38	QPSK20M	Bottom Side of Tablet	0	38150	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	22.92	1.44	0.17	0.252	0.36
	LTE 38	QPSK20M	Rear Face of Tablet	0	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	-0.16	0.087	0.12
	LTE 38	QPSK20M	Left Side of Tablet	0	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side of Tablet	0	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	0	0.29	0.41
	LTE 38	QPSK20M	Top Side of Tablet	10	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	0.11	0.113	0.16
	LTE 38	QPSK20M	Bottom Side of Tablet	0	38150	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	21.97	1.42	0.19	0.205	0.29
	LTE 38	QPSK20M	Top Side of Tablet	0	38150	1	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.97	1.13	-0.01	0.526	0.59
	LTE 38	QPSK20M	Top Side of Tablet	0	38150	50	0	WNC	Main Ant 0	w/	-	1.00	20.50	19.92	1.14	0.07	0.52	0.59
	LTE 38	QPSK20M	Top Side of Tablet	0	37850	1	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.87	1.16	-0.07	0.505	0.59
23	LTE 38	QPSK20M	Top Side of Tablet	0	38000	1	0	WNC	Main Ant 0	w/	-	1.00	21.50	20.83	1.17	-0.02	0.662	0.77
	LTE 38	QPSK20M	Top Side of Tablet	0	38000	1	0	Auden	Main Ant 0	w/	-	1.00	21.50	20.83	1.17	-0.09	0.636	0.74
	LTE 41	QPSK20M	Bottom of Laptop	0	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	0	<0.001	0.00
	LTE 41	QPSK20M	Bottom of Laptop	0	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	0	<0.001	0.00
	LTE 41	QPSK20M	Rear Face of Tablet	0	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	0.14	0.092	0.13
	LTE 41	QPSK20M	Left Side of Tablet	0	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side of Tablet	0	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	-0.12	0.31	0.43
	LTE 41	QPSK20M	Top Side of Tablet	10	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	0.05	0.122	0.17
	LTE 41	QPSK20M	Bottom Side of Tablet	0	41490	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.07	1.39	-0.13	0.22	0.31
	LTE 41	QPSK20M	Rear Face of Tablet	0	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	-0.01	0.076	0.10
	LTE 41	QPSK20M	Left Side of Tablet	0	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side of Tablet	0	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	0.18	0.254	0.35
	LTE 41	QPSK20M	Top Side of Tablet	10	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	-0.16	0.099	0.14
	LTE 41	QPSK20M	Bottom Side of Tablet	0	41490	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.12	1.37	-0.09	0.18	0.25
	LTE 41	QPSK20M	Top Side of Tablet	0	41490	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.13	1.22	-0.16	0.46	0.56
	LTE 41	QPSK20M	Top Side of Tablet	0	41490	50	0	WNC	Main Ant 0	w/	-	1.00	19.00	18.08	1.24	-0.16	0.455	0.56
	LTE 41	QPSK20M	Top Side of Tablet	0	39750	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.77	1.33	0.1	0.291	0.39
	LTE 41	QPSK20M	Top Side of Tablet	0	40185	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.04	1.25	0.08	0.171	0.21
	LTE 41	QPSK20M	Top Side of Tablet	0	40620	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	18.83	1.31	-0.05	0.441	0.58
11	LTE 41	QPSK20M	Top Side of Tablet	0	41055	1	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.11	1.23	-0.01	0.579	0.71
	LTE 41	QPSK20M	Top Side of Tablet	0	PCC: 41292 SCC: 41490	PCC: 1 SCC: 1	PCC: 99 SCC: 0	WNC	Main Ant 0	w/	-	1.00	20.00	18.13	1.54	-0.03	0.445	0.69
	LTE 41	QPSK20M	Top Side of Tablet	0	41055	1	0	Auden	Main Ant 0	w/	-	1.00	20.00	19.11	1.23	-0.11	0.556	0.68



BUREAU
VERITAS

Body SAR Test Result

Body SAR Test Result																		
System & Position							DUT Configuration				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant. Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 48	QPSK20M	Bottom of Laptop	0	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	0	<0.001	0.00
	LTE 48	QPSK20M	Bottom of Laptop	0	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Rear Face of Tablet	0	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	0.14	0.18	0.18
	LTE 48	QPSK20M	Left Side of Tablet	0	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	-0.12	0.195	0.20
	LTE 48	QPSK20M	Right Side of Tablet	0	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	0.1	0.303	0.31
	LTE 48	QPSK20M	Top Side of Tablet	10	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	0.14	0.319	0.32
	LTE 48	QPSK20M	Bottom Side of Tablet	0	55340	1	0	WNC	Main Ant 0	w/o	-	1.00	22.00	21.96	1.01	0.01	0.059	0.06
	LTE 48	QPSK20M	Rear Face of Tablet	0	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	0.18	0.145	0.15
	LTE 48	QPSK20M	Left Side of Tablet	0	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	0.18	0.157	0.16
	LTE 48	QPSK20M	Right Side of Tablet	0	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	0.17	0.243	0.25
	LTE 48	QPSK20M	Top Side of Tablet	10	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	-0.09	0.74	0.75
	LTE 48	QPSK20M	Bottom Side of Tablet	0	55340	50	0	WNC	Main Ant 0	w/o	-	1.00	21.00	20.91	1.02	-0.17	0.048	0.05
	LTE 48	QPSK20M	Top Side of Tablet	0	55340	1	0	WNC	Main Ant 0	w/	-	1.00	15.00	14.95	1.01	0.18	0.937	0.95
	LTE 48	QPSK20M	Top Side of Tablet	0	55340	50	0	WNC	Main Ant 0	w/	-	1.00	14.00	13.90	1.02	-0.08	0.755	0.77
	LTE 48	QPSK20M	Top Side of Tablet	0	55340	100	0	WNC	Main Ant 0	w/	-	1.00	14.00	13.92	1.02	-0.12	0.635	0.65
	LTE 48	QPSK20M	Top Side of Tablet	0	55780	1	0	WNC	Main Ant 0	w/	-	1.00	15.00	14.41	1.15	-0.17	0.872	1.00
	LTE 48	QPSK20M	Top Side of Tablet	0	56210	1	0	WNC	Main Ant 0	w/	-	1.00	15.00	14.44	1.14	-0.09	0.929	1.06
12	LTE 48	QPSK20M	Top Side of Tablet	0	56640	1	0	WNC	Main Ant 0	w/	-	1.00	15.00	14.92	1.02	0.04	1.13	1.15
	LTE 48	QPSK20M	Top Side of Tablet	0	PCC: 55340 SCC: 55538	PCC: 1 SCC: 1	PCC: 99 SCC: 0	WNC	Main Ant 0	w/	-	1.00	15.00	14.10	1.23	-0.08	0.896	1.10
	LTE 48	QPSK20M	Top Side of Tablet	0	PCC: 55891 SCC: 56089	PCC: 1 SCC: 1	PCC: 99 SCC: 0	WNC	Main Ant 0	w/	-	1.00	15.00	14.03	1.25	-0.01	0.874	1.09
	LTE 48	QPSK20M	Top Side of Tablet	0	PCC: 56442 SCC: 56640	PCC: 1 SCC: 1	PCC: 99 SCC: 0	WNC	Main Ant 0	w/	-	1.00	15.00	13.99	1.26	-0.02	0.869	1.09
	LTE 48	QPSK20M	Top Side of Tablet	0	56640	1	0	Auden	Main Ant 0	w/	-	1.00	15.00	14.92	1.02	-0.17	1.09	1.11
	LTE 48	QPSK20M	Top Side of Tablet	0	55340	1	0	Auden	Main Ant 0	w/	-	1.00	15.00	14.95	1.01	0.04	0.987	1.00
	LTE 48	QPSK20M	Top Side of Tablet	0	55780	1	0	Auden	Main Ant 0	w/	-	1.00	15.00	14.41	1.15	-0.02	0.993	1.14
	LTE 48	QPSK20M	Top Side of Tablet	0	56210	1	0	Auden	Main Ant 0	w/	-	1.00	15.00	14.44	1.14	-0.12	0.991	1.13
	LTE 48	QPSK20M	Top Side of Tablet	0	56640	1	0	WNC	Main Ant 0	w/	-	1.00	15.00	14.92	1.02	0.01	1.06	1.08
	LTE 66	QPSK20M	Bottom of Laptop	0	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0	<0.001	0.00
	LTE 66	QPSK20M	Bottom of Laptop	0	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	0	<0.001	0.00
	LTE 66	QPSK20M	Rear Face of Tablet	0	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0.18	0.064	0.08
	LTE 66	QPSK20M	Left Side of Tablet	0	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0.02	0.078	0.10
	LTE 66	QPSK20M	Right Side of Tablet	0	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0.13	0.217	0.28
	LTE 66	QPSK20M	Top Side of Tablet	10	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0.11	0.298	0.39
	LTE 66	QPSK20M	Bottom Side of Tablet	0	132322	1	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.34	1.31	0.19	0.046	0.06
	LTE 66	QPSK20M	Rear Face of Tablet	0	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	0.11	0.05	0.06
	LTE 66	QPSK20M	Left Side of Tablet	0	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	-0.11	0.06	0.08
	LTE 66	QPSK20M	Right Side of Tablet	0	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	0.14	0.167	0.22
	LTE 66	QPSK20M	Top Side of Tablet	10	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	-0.19	0.23	0.30
	LTE 66	QPSK20M	Bottom Side of Tablet	0	132322	50	0	WNC	Main Ant 0	w/o	-	1.00	23.50	22.39	1.29	-0.08	0.035	0.05
13	LTE 66	QPSK20M	Top Side of Tablet	0	132322	1	0	WNC	Main Ant 0	w/	-	1.00	21.00	20.75	1.06	-0.04	0.948	1.00
	LTE 66	QPSK20M	Top Side of Tablet	0	132322	50	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.70	1.07	0.06	0.731	0.78
	LTE 66	QPSK20M	Top Side of Tablet	0	132322	100	0	WNC	Main Ant 0	w/	-	1.00	20.00	19.72	1.07	-0.11	0.675	0.72
	LTE 66	QPSK20M	Top Side of Tablet	0	132072	1	0	WNC	Main Ant 0	w/	-	1.00	21.00	20.61	1.09	0.15	0.864	0.94
	LTE 66	QPSK20M	Top Side of Tablet	0	132572	1	0	WNC	Main Ant 0	w/	-	1.00	21.00	20.64	1.09	0.05	0.885	0.96
	LTE 66	QPSK20M	Top Side of Tablet	0	132322	1	0	Auden	Main Ant 0	w/	-	1.00	21.00	20.75	1.06	0.08	0.794	0.84
	LTE 66	QPSK20M	Top Side of Tablet	0	132072	1	0	Auden	Main Ant 0	w/	-	1.00	21.00	20.61	1.09	-0.02	0.768	0.84
	LTE 66	QPSK20M	Top Side of Tablet	0	132572	1	0	Auden	Main Ant 0	w/	-	1.00	21.00	20.64	1.09	0.04	0.775	0.84
	LTE 66	QPSK20M	Top Side of Tablet	0	132322	1	0	WNC	Main Ant 0	w/	-	1.00	21.00	20.75	1.06	-0.08	0.922	0.98
	LTE 71	QPSK20M	Bottom of Laptop	0	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	0	<0.001	0.00
	LTE 71	QPSK20M	Bottom of Laptop	0	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	0	<0.001	0.00
	LTE 71	QPSK20M	Rear Face of Tablet	0	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	0.17	0.043	0.06
	LTE 71	QPSK20M	Left Side of Tablet	0	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	-0.02	0.026	0.04
	LTE 71	QPSK20M	Right Side of Tablet	0	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	-0.17	0.202	0.27
	LTE 71	QPSK20M	Top Side of Tablet	10	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	-0.12	0.239	0.32
	LTE 71	QPSK20M	Bottom Side of Tablet	0	133297	1	0	WNC	Main Ant 0	w/o	-	1.00	25.50	24.19	1.35	-0.09	0.042	0.06
	LTE 71	QPSK20M	Rear Face of Tablet	0	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	-0.19	0.042	0.06
	LTE 71	QPSK20M	Left Side of Tablet	0	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	-0.11	0.025	0.03
	LTE 71	QPSK20M	Right Side of Tablet	0	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	-0.03	0.195	0.26
	LTE 71	QPSK20M	Top Side of Tablet	10	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	-0.09	0.23	0.31
	LTE 71	QPSK20M	Bottom Side of Tablet	0	133297	50	0	WNC	Main Ant 0	w/o	-	1.00	24.50	23.24	1.34	0.02	0.04	0.05
	LTE 71	QPSK20M	Top Side of Tablet	0	133297	1	0	WNC	Main Ant 0	w/	-	1.00	24.00	23.69	1.07	-0.14	0.979	1.05
	LTE 71	QPSK20M	Top Side of Tablet	0	133297	50	0	WNC	Main Ant 0	w/	-	1.00	23.00	22.64	1.09	0.12	0.94	1.02
	LTE 71	QPSK20M	Top Side of Tablet	0	133297	100	0	WNC	Main Ant 0	w/	-	1.00	23.00	22.66	1.08	-0.07	0.928	1.00
14	LTE 71	QPSK20M	Top Side of Tablet	0	133222	1	0	WNC	Main Ant 0	w/	-	1.00	24.00	23.65	1.08	0.01	1.07	1.16
	LTE 71	QPSK20M	Top Side of Tablet	0	133372	1	0	WNC	Main Ant 0	w/	-	1.00	24.00	23.64	1.09	-0.06	0.927	1.01
	LTE																	



BUREAU
VERITAS

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant. Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom of Laptop	0	6			HB	Ant 0	NB	100.00	1.00	15.50	15.46	1.01	-0.01	0.598	0.60
	WLAN2.4G	802.11b	Keyboard Left Side of Laptop	0	6			HB	Ant 0	NB	100.00	1.00	15.50	15.46	1.01	-0.11	0.077	0.08
	WLAN2.4G	802.11b	Rear Face of Tablet	0	6			HB	Ant 0	TB	100.00	1.00	15.50	15.46	1.01	-0.03	0.521	0.53
	WLAN2.4G	802.11b	Left Side of Tablet	0	6			HB	Ant 0	TB	100.00	1.00	15.50	15.46	1.01	0.07	0.125	0.13
	WLAN2.4G	802.11b	Right Side of Tablet	0	6			HB	Ant 0	TB	100.00	1.00	15.50	15.46	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side of Tablet	0	6			HB	Ant 0	TB	100.00	1.00	15.50	15.46	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side of Tablet	0	6			HB	Ant 0	TB	100.00	1.00	15.50	15.46	1.01	0.13	0.099	0.10
	WLAN2.4G	802.11b	Bottom of Laptop	0	6			HB	Ant 1	NB	100.00	1.00	15.50	15.47	1.01	-0.02	0.653	0.66
	WLAN2.4G	802.11b	Keyboard Right Side of Laptop	0	6			HB	Ant 1	NB	100.00	1.00	15.50	15.47	1.01	-0.13	0.069	0.07
15	WLAN2.4G	802.11b	Rear Face of Tablet	0	6			HB	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	0.06	0.722	0.73
	WLAN2.4G	802.11b	Left Side of Tablet	0	6			HB	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side of Tablet	0	6			HB	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	-0.05	0.065	0.07
	WLAN2.4G	802.11b	Top Side of Tablet	0	6			HB	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side of Tablet	0	6			HB	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	0.03	0.093	0.09
	WLAN2.4G	802.11b	Bottom of Laptop	0	6			HB	Ant 0+1	NB	100.00	1.00	18.50	18.43	1.02	0.07	0.634	0.65
	WLAN2.4G	802.11b	Keyboard Left Side of Laptop	0	6			HB	Ant 0+1	NB	100.00	1.00	18.50	18.43	1.02	0.01	0.098	0.10
	WLAN2.4G	802.11b	Keyboard Right Side of Laptop	0	6			HB	Ant 0+1	NB	100.00	1.00	18.50	18.43	1.02	0.16	0.063	0.06
	WLAN2.4G	802.11b	Rear Face of Tablet	0	6			HB	Ant 0+1	TB	100.00	1.00	18.50	18.43	1.02	-0.02	0.691	0.70
	WLAN2.4G	802.11b	Left Side of Tablet	0	6			HB	Ant 0+1	TB	100.00	1.00	18.50	18.43	1.02	-0.06	0.119	0.12
	WLAN2.4G	802.11b	Right Side of Tablet	0	6			HB	Ant 0+1	TB	100.00	1.00	18.50	18.43	1.02	0.18	0.044	0.04
	WLAN2.4G	802.11b	Top Side of Tablet	0	6			HB	Ant 0+1	TB	100.00	1.00	18.50	18.43	1.02	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side of Tablet	0	6			HB	Ant 0+1	TB	100.00	1.00	18.50	18.43	1.02	-0.06	0.095	0.10
	WLAN2.4G	802.11b	Rear Face of Tablet	0	1			HB	Ant 1	TB	100.00	1.00	15.50	15.43	1.02	0.11	0.686	0.70
	WLAN2.4G	802.11b	Rear Face of Tablet	0	11			HB	Ant 1	TB	100.00	1.00	15.50	15.46	1.01	0.13	0.713	0.72
	WLAN2.4G	802.11b	Rear Face of Tablet	0	12			HB	Ant 1	TB	100.00	1.00	15.50	15.41	1.02	0.12	0.686	0.70
	WLAN2.4G	802.11b	Rear Face of Tablet	0	13			HB	Ant 1	TB	100.00	1.00	15.50	15.38	1.03	0.14	0.678	0.70
	WLAN2.4G	802.11b	Rear Face of Tablet	0	6			Auden	Ant 1	TB	100.00	1.00	15.50	15.47	1.01	0.09	0.703	0.71
	WLAN5.3G	802.11ac VHT160	Bottom of Laptop	0	50			HB	Ant 0	NB	100.00	1.00	14.50	14.43	1.02	-0.11	0.521	0.53
	WLAN5.3G	802.11ac VHT160	Keyboard Left Side of Laptop	0	50			HB	Ant 0	NB	100.00	1.00	14.50	14.43	1.02	-0.12	0.032	0.03
	WLAN5.3G	802.11ac VHT160	Rear Face of Tablet	0	50			HB	Ant 0	TB	100.00	1.00	11.00	10.95	1.01	-0.17	0.411	0.42
	WLAN5.3G	802.11ac VHT160	Left Side of Tablet	0	50			HB	Ant 0	TB	100.00	1.00	11.00	10.95	1.01	-0.11	0.022	0.02
	WLAN5.3G	802.11ac VHT160	Right Side of Tablet	0	50			HB	Ant 0	TB	100.00	1.00	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side of Tablet	0	50			HB	Ant 0	TB	100.00	1.00	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side of Tablet	0	50			HB	Ant 0	TB	100.00	1.00	11.00	10.95	1.01	0.19	0.137	0.14
16	WLAN5.3G	802.11ac VHT160	Bottom of Laptop	0	50			HB	Ant 1	NB	100.00	1.00	14.50	14.47	1.01	0.03	0.639	0.65
	WLAN5.3G	802.11ac VHT160	Keyboard Right Side of Laptop	0	50			HB	Ant 1	NB	100.00	1.00	14.50	14.47	1.01	-0.16	0.059	0.06
	WLAN5.3G	802.11ac VHT160	Rear Face of Tablet	0	50			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	-0.17	0.322	0.33
	WLAN5.3G	802.11ac VHT160	Left Side of Tablet	0	50			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side of Tablet	0	50			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0.02	0.051	0.05
	WLAN5.3G	802.11ac VHT160	Top Side of Tablet	0	50			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side of Tablet	0	50			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0.03	0.094	0.09
	WLAN5.3G	802.11ac VHT160	Bottom of Laptop	0	50			HB	Ant 0+1	NB	100.00	1.00	17.50	17.39	1.03	-0.17	0.565	0.58
	WLAN5.3G	802.11ac VHT160	Keyboard Left Side of Laptop	0	50			HB	Ant 0+1	NB	100.00	1.00	17.50	17.39	1.03	0.13	0.033	0.03
	WLAN5.3G	802.11ac VHT160	Keyboard Right Side of Laptop	0	50			HB	Ant 0+1	NB	100.00	1.00	17.50	17.39	1.03	-0.05	0.056	0.06
	WLAN5.3G	802.11ac VHT160	Rear Face of Tablet	0	50			HB	Ant 0+1	TB	100.00	1.00	14.00	13.93	1.02	-0.16	0.383	0.39
	WLAN5.3G	802.11ac VHT160	Left Side of Tablet	0	50			HB	Ant 0+1	TB	100.00	1.00	14.00	13.93	1.02	-0.13	0.025	0.03
	WLAN5.3G	802.11ac VHT160	Right Side of Tablet	0	50			HB	Ant 0+1	TB	100.00	1.00	14.00	13.93	1.02	-0.01	0.033	0.03
	WLAN5.3G	802.11ac VHT160	Top Side of Tablet	0	50			HB	Ant 0+1	TB	100.00	1.00	14.00	13.93	1.02	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side of Tablet	0	50			HB	Ant 0+1	TB	100.00	1.00	14.00	13.93	1.02	-0.01	0.099	0.10
	WLAN5.3G	802.11ac VHT160	Bottom of Laptop	0	50			Auden	Ant 1	NB	100.00	1.00	14.50	14.47	1.01	-0.05	0.579	0.58
	WLAN5.6G	802.11ac VHT160	Bottom of Laptop	0	114			HB	Ant 0	NB	100.00	1.00	14.00	13.90	1.02	-0.03	0.496	0.51
	WLAN5.6G	802.11ac VHT160	Keyboard Left Side of Laptop	0	114			HB	Ant 0	NB	100.00	1.00	14.00	13.90	1.02	-0.03	0.087	0.09
	WLAN5.6G	802.11ac VHT160	Rear Face of Tablet	0	114			HB	Ant 0	TB	100.00	1.00	11.00	10.99	1.00	-0.1	0.489	0.49
	WLAN5.6G	802.11ac VHT160	Left Side of Tablet	0	114			HB	Ant 0	TB	100.00	1.00	11.00	10.99	1.00	-0.03	0.029	0.03
	WLAN5.6G	802.11ac VHT160	Right Side of Tablet	0	114			HB	Ant 0	TB	100.00	1.00	11.00	10.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side of Tablet	0	114			HB	Ant 0	TB	100.00	1.00	11.00	10.99	1.00	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side of Tablet	0	114			HB	Ant 0	TB	100.00	1.00	11.00	10.99	1.00	-0.13	0.154	0.15
17	WLAN5.6G	802.11ac VHT160	Bottom of Laptop	0	114			HB	Ant 1	NB	100.00	1.00	14.00	13.94	1.01	0.09	0.619	0.63
	WLAN5.6G	802.11ac VHT160	Keyboard Right Side of Laptop	0	114			HB	Ant 1	NB	100.00	1.00	14.00	13.94	1.01	0.09	0.051	0.05
	WLAN5.6G	802.11ac VHT160	Rear Face of Tablet	0	114			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	-0.05	0.48	0.48
	WLAN5.6G	802.11ac VHT160	Left Side of Tablet	0	114			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side of Tablet	0	114			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	-0.04	0.033	0.03
	WLAN5.6G	802.11ac VHT160	Top Side of Tablet	0	114			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side of Tablet	0	114			HB	Ant 1	TB	100.00	1.00	11.00	10.96	1.01	0.11	0.123	0.12
	WLAN5.6G	802.11ac VHT160	Bottom of Laptop	0	114			HB	Ant 0+1	NB	100.00	1.00	17.00	16.96	1.01	-0.13	0.516	0.52
	WLAN5.6G	802.11ac VHT160	Keyboard Left Side of Laptop	0	114			HB	Ant 0+1	NB	100.00	1.00	17.00	16.96	1.01	-0.13	0.052	0.05
	WLAN5.6G	802.11ac VHT160	Keyboard Right Side of Laptop	0	114			HB	Ant 0+1	NB	100.00	1.00	17.00	16.96	1.01	-0.13	0.041	0.04
	WLAN5.6G	802.11ac VHT160	Rear Face of Tablet	0	114			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.11	0.538	0.54
	WLAN5.6G	802.11ac VHT160	Left Side of Tablet	0	114			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.1	0.023	0.02
	WLAN5.6G	802.11ac VHT160	Right Side of Tablet	0	114			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.15	0.033	0.03
	WLAN5.6G	802.11ac VHT160	Top Side of Tablet	0	114			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side of Tablet	0	114			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	0.08	0.177	0.18
	WLAN5.6G	802.11ac VHT160	Bottom of Laptop	0	114			Auden	Ant 1	NB	100.00	1.00	14.00	13.94	1.01	0.13	0.597	0.60



BUREAU
VERITAS

Body SAR Test Result

Body SAR Test Result																		
System & Position							DUT Configuration				SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Ant Vendor	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
19	WLAN5.8G	802.11ac VHT80	Bottom of Laptop	0	155			HB	Ant 0	NB	100.00	1.00	14.00	13.87	1.03	-0.19	0.508	0.52
	WLAN5.8G	802.11ac VHT80	Rear Face of Tablet	0	155			HB	Ant 0	TB	100.00	1.00	11.00	10.90	1.02	0.05	0.498	0.51
	WLAN5.8G	802.11ac VHT80	Left Side of Tablet	0	155			HB	Ant 0	TB	100.00	1.00	11.00	10.90	1.02	-0.09	0.029	0.03
	WLAN5.8G	802.11ac VHT80	Right Side of Tablet	0	155			HB	Ant 0	TB	100.00	1.00	11.00	10.90	1.02	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side of Tablet	0	155			HB	Ant 0	TB	100.00	1.00	11.00	10.90	1.02	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side of Tablet	0	155			HB	Ant 0	TB	100.00	1.00	11.00	10.90	1.02	0.04	0.199	0.20
	WLAN5.8G	802.11ac VHT80	Bottom of Laptop	0	155			HB	Ant 1	NB	100.00	1.00	14.00	13.96	1.01	-0.03	0.62	0.63
	WLAN5.8G	802.11ac VHT80	Rear Face of Tablet	0	155			HB	Ant 1	TB	100.00	1.00	11.00	10.90	1.02	0.18	0.537	0.55
	WLAN5.8G	802.11ac VHT80	Left Side of Tablet	0	155			HB	Ant 1	TB	100.00	1.00	11.00	10.90	1.02	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side of Tablet	0	155			HB	Ant 1	TB	100.00	1.00	11.00	10.90	1.02	-0.13	0.048	0.05
	WLAN5.8G	802.11ac VHT80	Top Side of Tablet	0	155			HB	Ant 1	TB	100.00	1.00	11.00	10.90	1.02	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side of Tablet	0	155			HB	Ant 1	TB	100.00	1.00	11.00	10.90	1.02	-0.19	0.134	0.14
	WLAN5.8G	802.11ac VHT80	Bottom of Laptop	0	155			HB	Ant 0+1	NB	100.00	1.00	17.00	16.93	1.02	0.03	0.579	0.59
	WLAN5.8G	802.11ac VHT80	Rear Face of Tablet	0	155			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.05	0.549	0.55
	WLAN5.8G	802.11ac VHT80	Left Side of Tablet	0	155			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.17	0.028	0.03
	WLAN5.8G	802.11ac VHT80	Right Side of Tablet	0	155			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.18	0.038	0.04
	WLAN5.8G	802.11ac VHT80	Top Side of Tablet	0	155			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side of Tablet	0	155			HB	Ant 0+1	TB	100.00	1.00	14.00	13.97	1.01	-0.13	0.21	0.21
WLAN5.8G	802.11ac VHT80	Bottom of Laptop	0	155			Auden	Ant 1	NB	100.00	1.00	14.00	13.96	1.01	-0.16	0.569	0.57	
20	WLAN5.9G	802.11ac VHT160	Bottom of Laptop	0	163			HB	Ant 0	NB	100.00	1.00	14.00	13.93	1.02	-0.07	0.549	0.56
	WLAN5.9G	802.11ac VHT160	Rear Face of Tablet	0	163			HB	Ant 0	TB	100.00	1.00	11.00	10.98	1.00	-0.11	0.495	0.50
	WLAN5.9G	802.11ac VHT160	Left Side of Tablet	0	163			HB	Ant 0	TB	100.00	1.00	11.00	10.98	1.00	-0.17	0.025	0.03
	WLAN5.9G	802.11ac VHT160	Right Side of Tablet	0	163			HB	Ant 0	TB	100.00	1.00	11.00	10.98	1.00	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side of Tablet	0	163			HB	Ant 0	TB	100.00	1.00	11.00	10.98	1.00	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side of Tablet	0	163			HB	Ant 0	TB	100.00	1.00	11.00	10.98	1.00	-0.15	0.137	0.14
	WLAN5.9G	802.11ac VHT160	Bottom of Laptop	0	163			HB	Ant 1	NB	100.00	1.00	14.00	13.97	1.01	-0.14	0.592	0.60
	WLAN5.9G	802.11ac VHT160	Rear Face of Tablet	0	163			HB	Ant 1	TB	100.00	1.00	11.00	10.97	1.01	-0.08	0.556	0.56
	WLAN5.9G	802.11ac VHT160	Left Side of Tablet	0	163			HB	Ant 1	TB	100.00	1.00	11.00	10.97	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Right Side of Tablet	0	163			HB	Ant 1	TB	100.00	1.00	11.00	10.97	1.01	-0.12	0.031	0.03
	WLAN5.9G	802.11ac VHT160	Top Side of Tablet	0	163			HB	Ant 1	TB	100.00	1.00	11.00	10.97	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side of Tablet	0	163			HB	Ant 1	TB	100.00	1.00	11.00	10.97	1.01	-0.18	0.146	0.15
	WLAN5.9G	802.11ac VHT160	Bottom of Laptop	0	163			HB	Ant 0+1	NB	100.00	1.00	17.00	16.93	1.02	-0.12	0.554	0.57
	WLAN5.9G	802.11ac VHT160	Rear Face of Tablet	0	163			HB	Ant 0+1	TB	100.00	1.00	14.00	13.98	1.00	0.17	0.501	0.50
	WLAN5.9G	802.11ac VHT160	Left Side of Tablet	0	163			HB	Ant 0+1	TB	100.00	1.00	14.00	13.98	1.00	-0.1	0.022	0.02
	WLAN5.9G	802.11ac VHT160	Right Side of Tablet	0	163			HB	Ant 0+1	TB	100.00	1.00	14.00	13.98	1.00	-0.08	0.029	0.03
	WLAN5.9G	802.11ac VHT160	Top Side of Tablet	0	163			HB	Ant 0+1	TB	100.00	1.00	14.00	13.98	1.00	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side of Tablet	0	163			HB	Ant 0+1	TB	100.00	1.00	14.00	13.98	1.00	-0.09	0.157	0.16
WLAN5.9G	802.11ac VHT160	Bottom of Laptop	0	163			Auden	Ant 1	NB	100.00	1.00	14.00	13.97	1.01	0.05	0.58	0.59	
21	BT	BDR	Bottom of Laptop	0	0			HB	Ant 1	NB	76.47	1.31	11.50	11.39	1.03	0.05	0.101	0.14
	BT	BDR	Rear Face of Tablet	0	0			HB	Ant 1	TB	76.47	1.31	11.50	11.39	1.03	-0.03	0.078	0.11
	BT	BDR	Left Side of Tablet	0	0			HB	Ant 1	TB	76.47	1.31	11.50	11.39	1.03	0	<0.001	0.00
	BT	BDR	Right Side of Tablet	0	0			HB	Ant 1	TB	76.47	1.31	11.50	11.39	1.03	0	<0.001	0.00
	BT	BDR	Top Side of Tablet	0	0			HB	Ant 1	TB	76.47	1.31	11.50	11.39	1.03	0	<0.001	0.00
	BT	BDR	Bottom Side of Tablet	0	0			HB	Ant 1	TB	76.47	1.31	11.50	11.39	1.03	0	<0.001	0.00
	BT	BDR	Bottom of Laptop	0	39			HB	Ant 1	NB	76.47	1.31	11.50	11.31	1.04	0.05	0.096	0.13
BT	BDR	Bottom of Laptop	0	78			HB	Ant 1	NB	76.47	1.31	11.50	11.38	1.03	-0.06	0.097	0.13	
BT	BDR	Bottom of Laptop	0	0			Auden	Ant 1	NB	76.47	1.31	11.50	11.39	1.03	-0.13	0.094	0.13	

SAR and Power Density Test Result																													
System & Position							DUT Configuration				SAR										Power Density								
Plot No.	Band	Frequency For System Check (MHz)	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Power Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	47	HB	Ant 0	SP	NB	100.00	1.00	14.00	13.98	1.00	0.02	0.628	0.63	4.75	4.75	0.0485	3.35	1.545	4.00	-0.11	2.62	4.05	2.85	4.4
	UNII-5	6500	802.11ax HE160	Keyboard Left Side of Laptop	0	47	HB	Ant 0	SP	NB	100.00	1.00	14.00	13.98	1.00	-0.03	0.049	0.05	0.453	0.45									
	UNII-5	6500	802.11ax HE160	Rear Face of Tablet	0	111	HB	Ant 0	SP	TB	100.00	1.00	11.50	11.42	1.02	-0.19	0.507	0.52	3.96	4.04									
	UNII-5	6500	802.11ax HE160	Left Side of Tablet	0	111	HB	Ant 0	SP	TB	100.00	1.00	11.50	11.42	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Right Side of Tablet	0	111	HB	Ant 0	SP	TB	100.00	1.00	11.50	11.42	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Top Side of Tablet	0	111	HB	Ant 0	SP	TB	100.00	1.00	11.50	11.42	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Bottom Side of Tablet	0	111	HB	Ant 0	SP	TB	100.00	1.00	11.50	11.42	1.02	-0.08	0.189	0.19	1.4	1.43									
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	47	HB	Ant 1	SP	NB	100.00	1.00	14.00	13.99	1.00	-0.1	0.417	0.42	2.77	2.77									
	UNII-5	6500	802.11ax HE160	Keyboard Right Side of Laptop	0	47	HB	Ant 1	SP	NB	100.00	1.00	14.00	13.99	1.00	-0.04	0.067	0.07	0.374	0.37									
	UNII-5	6500	802.11ax HE160	Rear Face of Tablet	0	47	HB	Ant 1	SP	TB	100.00	1.00	10.50	10.41	1.02	0.12	0.421	0.43	2.2	2.24									
	UNII-5	6500	802.11ax HE160	Left Side of Tablet	0	47	HB	Ant 1	SP	TB	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Right Side of Tablet	0	47	HB	Ant 1	SP	TB	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Top Side of Tablet	0	47	HB	Ant 1	SP	TB	100.00	1.00	10.50	10.41	1.02	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Bottom Side of Tablet	0	47	HB	Ant 1	SP	TB	100.00	1.00	10.50	10.41	1.02	0	0.124	0.13	0.617	0.63									
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	47	HB	Ant 0+1	SP	NB	100.00	1.00	17.00	16.93	1.02	-0.04	0.426	0.43	3.01	3.07									
	UNII-5	6500	802.11ax HE160	Keyboard Left Side of Laptop	0	47	HB	Ant 0+1	SP	NB	100.00	1.00	17.00	16.93	1.02	-0.09	0.042	0.04	0.253	0.26									
	UNII-5	6500	802.11ax HE160	Keyboard Right Side of Laptop	0	47	HB	Ant 0+1	SP	NB	100.00	1.00	17.00	16.93	1.02	0.1	0.066	0.07	0.371	0.38									
	UNII-5	6500	802.11ax HE160	Rear Face of Tablet	0	111	HB	Ant 0+1	SP	TB	100.00	1.00	14.04	13.75	1.07	0.09	0.416	0.45	2.77	2.96									
	UNII-5	6500	802.11ax HE160	Left Side of Tablet	0	111	HB	Ant 0+1	SP	TB	100.00	1.00	14.04	13.75	1.07	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Right Side of Tablet	0	111	HB	Ant 0+1	SP	TB	100.00	1.00	14.04	13.75	1.07	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Top Side of Tablet	0	111	HB	Ant 0+1	SP	TB	100.00	1.00	14.04	13.75	1.07	0	<0.001	0.00	0.001	0									
	UNII-5	6500	802.11ax HE160	Bottom Side of Tablet	0	111	HB	Ant 0+1	SP	TB	100.00	1.00	14.04	13.75	1.07	-0.19	0.166	0.18	0.932	1									
22	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	15	HB	Ant 0	SP	NB	100.00	1.00	14.00	13.97	1.01	0.01	0.689	0.70	5	5.05	0.0502	3.68	1.545	4.00	-0.02	2.88	4.45	3.13	4.88
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	79	HB	Ant 0	SP	NB	100.00	1.00	14.00	13.56	1.11	0.08	0.521	0.58	3.59	3.98									
	UNII-6	6500	802.11ax HE160	Bottom of Laptop	0	111	HB	Ant 0	SP	NB	100.00	1.00	13.50	13.46	1.01	-0.11	0.644	0.65	4.2	4.24	0.0461	3.44	1.545	4.00	0.01	2.69	4.16	2.92	4.56
	UNII-7	6500	802.11ax HE160	Bottom of Laptop	0	143	HB	Ant 0	SP	NB	100.00	1.00	13.50	13.43	1.02	0.16	0.427	0.44	2.63	2.68									
	UNII-7	6500	802.11ax HE160	Bottom of Laptop	0	175	HB	Ant 0	SP	NB	100.00	1.00	13.50	13.45	1.01	0.06	0.44	0.44	2.69	2.72									
	UNII-8	6500	802.11ax HE160	Bottom of Laptop	0	207	HB	Ant 0	SP	NB	100.00	1.00	14.00	13.96	1.01	-0.1	0.567	0.57	3.32	3.35									
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	15	Auden	Ant 0	SP	NB	100.00	1.00	14.00	13.97	1.01	-0.01	0.666	0.67	4.68	4.73	0.0502	3.55	1.545	4.00	0.05	2.78	4.3	3.02	4.71
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	47	Auden	Ant 0	SP	NB	100.00	1.00	14.00	13.98	1.00	-0.16	0.616	0.62	4.19	4.19									
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	79	Auden	Ant 0	SP	NB	100.00	1.00	14.00	13.56	1.11	0.08	0.527	0.58	3.31	3.67									
	UNII-6	6500	802.11ax HE160	Bottom of Laptop	0	111	Auden	Ant 0	SP	NB	100.00	1.00	13.50	13.46	1.01	-0.12	0.644	0.65	4.2	4.24	0.0461	3.41	1.545	4.00	-0.13	2.69	4.16	2.92	4.56
	UNII-7	6500	802.11ax HE160	Bottom of Laptop	0	143	Auden	Ant 0	SP	NB	100.00	1.00	13.50	13.43	1.02	0.1	0.427	0.44	2.63	2.68									
	UNII-7	6500	802.11ax HE160	Bottom of Laptop	0	175	Auden	Ant 0	SP	NB	100.00	1.00	13.50	13.45	1.01	-0.13	0.44	0.44	2.69	2.72									
	UNII-8	6500	802.11ax HE160	Bottom of Laptop	0	207	Auden	Ant 0	SP	NB	100.00	1.00	14.00	13.96	1.01	0.08	0.567	0.57	3.32	3.35									
	UNII-5	6500	802.11ax HE160	Bottom of Laptop	0	15	HB	Ant 0	LPI	NB	100.00	1.00	14.00	13.95	1.01	0.01	0.634	0.64	4.67	4.72	0.0502	3.68	1.545	4.00	-0.02	2.71	4.19	2.98	4.65

Appendix G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeated SAR

Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R01	WCDMAII	RMC12.2K	Top Side of Tablet	9400	0.906	0.867	1.04
R02	WCDMA IV	RMC12.2K	Top Side of Tablet	1413	0.817	0.803	1.02
R03	WCDMA V	RMC12.2K	Top Side of Tablet	4132	0.812	0.806	1.01
R04	LTE 5	QPSK10M	Top Side of Tablet	20525	0.81	0.797	1.02
R06	LTE 12	QPSK10M	Top Side of Tablet	23060	0.924	0.917	1.01
R07	LTE 13	QPSK10M	Top Side of Tablet	23230	1.1	1.06	1.04
R08	LTE 14	QPSK10M	Top Side of Tablet	23330	0.937	0.932	1.01
R09	LTE 25	QPSK20M	Top Side of Tablet	26590	1.1	1.03	1.07
R10	LTE 26	QPSK15M	Top Side of Tablet	26865	0.979	0.968	1.01
R12	LTE 48	QPSK20M	Top Side of Tablet	56640	1.13	1.06	1.07
R13	LTE 66	QPSK20M	Top Side of Tablet	132322	0.948	0.922	1.03
R14	LTE 71	QPSK20M	Top Side of Tablet	133222	1.07	1.04	1.03

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WWAN + WLAN 5G(2TX) + BT + RFID	Yes
B	WWAN + WLAN 6G(2TX) + BT + RFID	Yes
C	WWAN + WLAN 2.4G(1TX) +WLAN 5G(1TX) + RFID	Yes
D	WWAN + WLAN 2.4G(1TX) +WLAN 6G(1TX) + RFID	Yes

Notes

1. The WLAN 2.4G and BT cannot transmit simultaneously.

Simultaneous Transmission SAR Evaluation (Body)																	
Position	1	2	3	4	5	6	7	8	9	10	11	A(1+6+10)	B(1+9+10+11)	C(1+2+5+11)	C(1+3+4+11)	D(1+2+8+11)	D(1+3+7+11)
	Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Max RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg						
Bottom of Laptop	0.00	0.60	0.66	0.56	0.65	0.59	0.70	0.42	0.43	0.14	0.00	0.73	0.57	1.25	1.22	1.02	1.36
Rear Face of Tablet	0.18	0.53	0.73	0.51	0.56	0.55	0.52	0.43	0.45	0.11	0.054	0.894	0.794	1.324	1.474	1.194	1.484
Left Side of Tablet	0.22	0.13	0.00	0.03	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.25	0.22	0.35	0.25	0.35	0.22
Right Side of Tablet	0.62	0.00	0.07	0.00	0.05	0.04	0.00	0.00	0.00	0.00	0.00	0.66	0.62	0.67	0.69	0.62	0.69
Top Side of Tablet	1.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.16	1.16	1.16	1.16	1.16	1.16
Bottom Side of Tablet	0.39	0.10	0.09	0.20	0.15	0.21	0.19	0.13	0.18	0.00	0.00	0.60	0.57	0.64	0.68	0.62	0.67
Keyboard Left Side of Laptop		0.08	0.00	0.09	0.00	0.06	0.05	0.00	0.04	0.00		0.06	0.04	0.08	0.09	0.08	0.05
Keyboard Right Side of Laptop		0.00	0.07	0.00	0.12	0.09	0.00	0.07	0.07	0.00		0.09	0.07	0.12	0.07	0.07	0.07

Total Exposure Ratio (Body)											
Position	1	2	3	4	5	6	7	8	B(1+6+7+8)	D(1+2+5+8)	D(1+3+4+8)
	Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Max RFID	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	4cm ² W/m ²	4cm ² W/m ²	4cm ² W/m ²	1g SAR W/kg	1g SAR W/kg			
Bottom of Laptop	0.00	0.60	0.66	4.88	0.00	0.00	0.14	0.00	0.09	0.38	0.90
Rear Face of Tablet	0.18	0.53	0.73	0.00	0.00	0.00	0.11	0.054	0.22	0.48	0.60
Left Side of Tablet	0.22	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.22	0.14
Right Side of Tablet	0.62	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.39	0.39	0.43
Top Side of Tablet	1.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.73
Bottom Side of Tablet	0.39	0.10	0.09	0.00	0.00	0.00	0.00	0.00	0.24	0.31	0.30
Keyboard Left Side of Laptop		0.08	0.00	0.05	0.00	0.04	0.00		0.05	0.10	0.06
Keyboard Right Side of Laptop		0.00	0.07	0.00	0.07	0.07	0.00		0.05	0.05	0.09

Appendix J. Calibration of Test Equipment List

Calibration of Test Equipment List are shown as below.

Equipment for SAR Test

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1013	Aug. 22, 2024	1 Year
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 22, 2024	1 Year
System Validation Dipole	SPEAG	D1750V2	1055	Sep. 13, 2024	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Feb. 19, 2024	1 Year
System Validation Dipole	SPEAG	D2450V2	737	Feb. 19, 2024	1 Year
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 15, 2024	1 Year
System Validation Dipole	SPEAG	D3500V2	1007	Jan. 23, 2024	1 Year
System Validation Dipole	SPEAG	D3700V2	1017	Feb. 15, 2024	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Feb. 13, 2024	1 Year
System Validation Dipole	SPEAG	D6.5GHzV2	1008	Sep. 09, 2024	1 Year
System Verification Source	SPEAG	5G Verification Source 10 GHz	1025	Jan. 18, 2024	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7736	Feb. 01, 2024	1 Year
E-Field Probe	SPEAG	EUmmWV4	9438	Jul. 19, 2024	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1590	Aug. 15, 2024	1 Year
Universal Radio Communication Tester	Anritsu	MT8821C	6201381727	Aug. 05, 2024	1 Year
Analog Signal Generator	R&S	SMA100B	104417	Oct. 20, 2024	1 Year
Mini-Circuits Wideband Amplifier	Mini-Circuits	ZVA-183-S+	434502031A	Jun. 26, 2024	1 Year
Power Meter	Anritsu	ML2495A	1218009	Nov. 22, 2024	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Nov. 22, 2024	1 Year
Thermometer	YFE	YF-160A	120702365	Sep. 12, 2024	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May. 23, 2024	1 Year
Dielectric Assessment Kit	SPEAG	DAKS_VNA R140	0010917	May. 22, 2024	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4260	Nov. 11, 2024	1 Year


Appendix K. Considerations Related to Bluetooth for Setup and Testing

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

The duty factor of Bluetooth signal are shown as below.

<Time-domain plot for Bluetooth transmission signal>

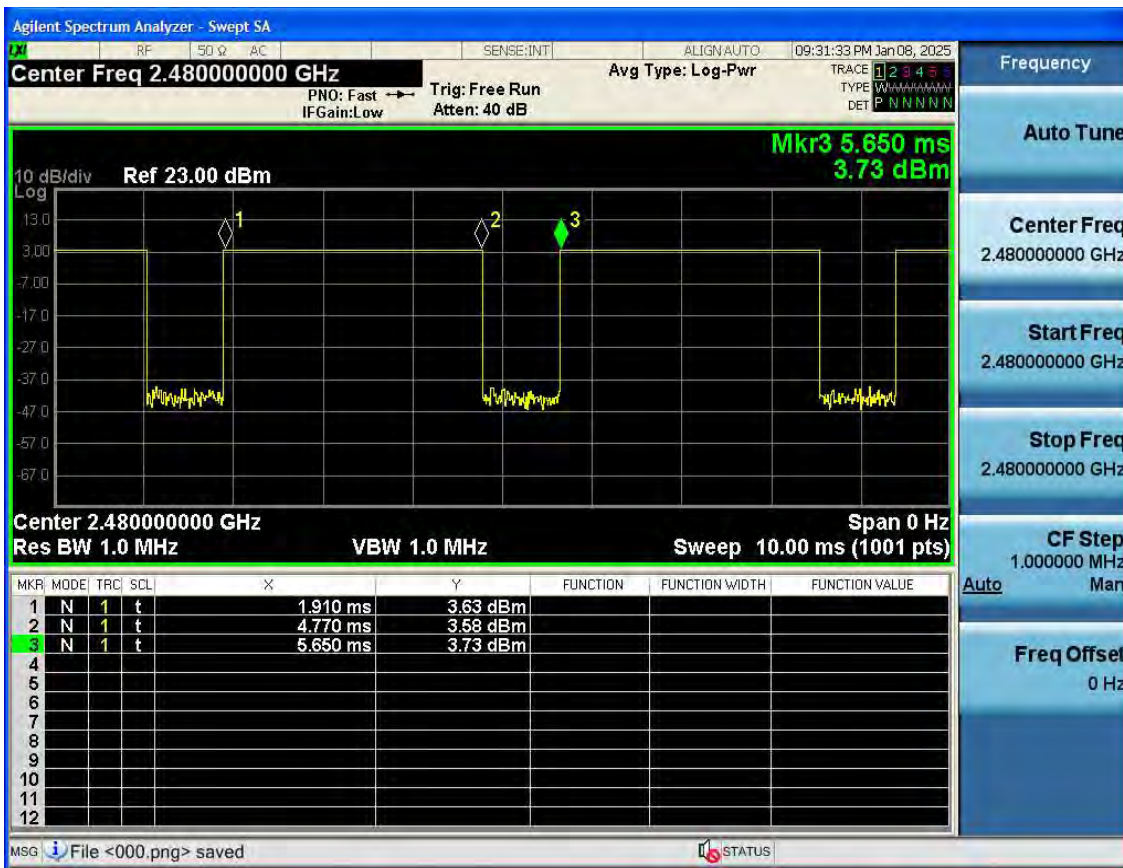

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = (4.77 - 1.91) / (5.65 - 1.91) = 76.47\%$$

Appendix L. Verifying the Mechanism Operation of Gravity-sensor

The power verified by LCD angle changed are shown as below.



BUREAU
VERITAS

<Power Reduction by LCD Angle Changed and Verifying Power Level of operating Laptop and Tablet mode on Setp A ~ G>

Test Band : 802.11ac VHT160 ch.50 Ant 0 for WLAN 5G as Representative Verify																																				
Summary	<A> From lid closed when LCD is 0° which power is subject to Laptop user mode, opening the screen side in 10° each step until the power of Tablet mode is obtained.																																			
	Degrees	0	10	20	30	40	50											150	160	170	180	190	200													
	Power (dBm)	14.37	14.34	14.34	14.28	14.28	14.26											14.31	14.32	14.08	14.37	14.44	10.83													
The Power level changed by LCD Triggering Angle is 190°	 Close the screen side in 5° each step from Step A, the power of Laptop mode is reobtained.																																			
	Degrees											185	190	195	200																					
	Power (dBm)											14.33	14.41	10.39	10.52																					
	<C> Verifying the power changed in 1° at each step.																																			
	Degrees											196	197	198	199	200																				
	Power (dBm)											10.62	10.32	10.37	10.36	10.52																				
	<D>Then Keep opening the screen side in 10° each step until fully open when LCD angle.																																			
	Degrees																					180	190	200	210	220										
	Power (dBm)																					14.23	14.33	10.3	10.35	10.32										
	<E> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 10° each step until the power subject to operating Laptop mode is obtained.																																			
	Degrees	360	350	340	330	320	310											200	190	180																
	Power (dBm)	10.86	10.32	10.36	10.32	10.32	10.28											10.85	14.42	14.41																
	<F> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 5° each step until fully closed.																																			
	Degrees	360	355	350	345	340	335	330											200	195	190	185														
	Power (dBm)	10.42	10.25	10.23	10.36	10.32	10.34	10.32											10.85	10.23	14.41	14.38														
	<G> Closing the screen side in 1° each step until the power subject to operating Laptop mode is obtained and keep closing until fully closed.																																			
	Degrees	360	359	358	357	356	355	354											198	197	196	195	190	185	180											
	Power (dBm)	10.34	10.33	10.33	10.33	10.31	10.31	10.31											10.42	10.44	10.45	10.43	14.38	14.37	14.41											
Test Band : 802.11ax HE160 ch.47 Ant 0 for WLAN 6G as Representative Verify																																				
Summary	<A> From lid closed when LCD is 0° which power is subject to Laptop user mode, opening the screen side in 10° each step until the power of Tablet mode is obtained.																																			
	Degrees	0	10	20	30	40	50											150	160	170	180	190	200													
	Power (dBm)	13.24	13.21	13.21	13.15	13.15	13.13											13.18	13.19	13.95	13.24	13.31	10.40													
The Power level changed by LCD Triggering Angle is 190°	 Close the screen side in 5° each step from Step A, the power of Laptop mode is reobtained.																																			
	Degrees											185	190	195	200																					
	Power (dBm)											13.20	13.31	10.26	10.39																					
	<C> Verifying the power changed in 1° at each step.																																			
	Degrees											196	197	198	199	200																				
	Power (dBm)											10.22	10.19	10.24	10.23	10.39																				
	<D>Then Keep opening the screen side in 10° each step until fully open when LCD angle.																																			
	Degrees																					180	190	200	210	220										
	Power (dBm)																					13.32	13.2	10.2	10.22	10.19										
	<E> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 10° each step until the power subject to operating Laptop mode is obtained.																																			
	Degrees	360	350	340	330	320	310											200	190	180																
	Power (dBm)	10.23	10.19	10.23	10.19	10.21	10.15											10.27	13.33	13.32																
	<F> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 5° each step until fully closed.																																			
	Degrees	360	355	350	345	340	335	330											200	195	190	185														
	Power (dBm)	10.22	10.21	10.16	10.18	10.21	10.22	10.2											10.2	10.1	13.13	13.24														
	<G> Closing the screen side in 1° each step until the power subject to operating Laptop mode is obtained and keep closing until fully closed.																																			
	Degrees	360	359	358	357	356	355	354											198	197	196	195	190	185	180											
	Power (dBm)	10.21	10.2	10.2	10.2	10.18	10.18	10.18											10.29	10.31	10.32	10.3	13.25	13.23	13.23											

Appendix Z. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client

B.V. ADT
Taoyuan City

Certificate No.

D750V3-1013_Aug24

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1013**

Calibration procedure(s) **QA CAL-05.v12**
Calibration Procedure for SAR Validation Sources between 0.7 - 3 GHz

Calibration date **August 22, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Cal
Power Sensor R&S NRP-33T	SN: 100967	28-Mar-24 (No. 217-04038)	Mar-25
Power Sensor R&S NRP18A	SN: 101859	21-Mar-24 (No. 4030A315007801)	Mar-25
Spectrum Analyzer R&S FSV40	SN: 101832	25-Jan-24 (No. 4030-315007551)	Jan-25
Mismatch; Short [S4188] Attenuator [S4423]	SN: 1152	28-Mar-24 (No. 217-04050)	Mar-25
OCP DAK-12	SN: 1016	05-Oct-23 (No. OCP-DAK12-1016_Oct23)	Oct-24
OCP DAK-3.5	SN: 1249	05-Oct-23 (No. OCP-DAK3.5-1249_Oct23)	Oct-24
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349_Jun24)	Jun-25
DAE4ip	SN: 1836	10-Jan-24 (No. DAE4ip-1836_Jan24)	Jan-25

Secondary Standards	ID	Check Date (in house)	Scheduled Check
ACAD Source Box	SN: 1000	28-May-24 (No. 675-ACAD_Source_Box-240528)	May-25
Signal Generator R&S SMB100A	SN: 182081	28-May-24 (No. 0001-300719404)	May-25
Mismatch; SMA	SN: 1102	22-May-24 (No. 675-Mismatch_SMA-240522)	May-25

	Name	Function
Calibrated by	Krešimir Franjić	Laboratory Technician
Approved by	Sven Kühn	Technical Manager

Signature

Issued: August 22, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 0108

Glossary

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation

- DASY System Handbook

Methods Applied and Interpretation of Parameters

- *Measurement Conditions*: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL*: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss*: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay*: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured*: SAR measured at the stated antenna input power.
- *SAR normalized*: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters*: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY8 Module SAR	16.4.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with spacer
Zoom Scan Resolution	dx, dy = 6mm, dz = 1.5mm	Graded Ratio = 1.5 mm (Z direction)
Frequency	750MHz $\pm$ 1MHz	

Head TSL parameters at 750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.890 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2)°C	42.1 $\pm$ 6%	0.900 mho/m $\pm$ 6%
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.36 W/kg $\pm$ 17.0% (k = 2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.41 W/kg $\pm$ 16.5% (k = 2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL at 750 MHz**

Impedance	52.9 Ω – 0.7 j Ω
Return Loss	-30.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

System Performance Check Report

Summary

Dipole	Frequency [MHz]	TSL	Power [dBm]
D750V3 - SN1013	750	HSL	24

Exposure Conditions

Phantom Section, TSL	Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	15		CW, 0--	750, 0	9.9	0.90	42.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Flat V4.9 mod	HSL, 2024-08-22	EX3DV4 - SN7349, 2024-06-03	DAE4lp Sn1836, 2024-01-10

Scans Setup

	Zoom Scan
Grid Extents [mm]	30 x 30 x 30
Grid Steps [mm]	6.0 x 6.0 x 1.5
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.5
MAIA	N/A
Surface Detection	VMS + 6p
Scan Method	Measured


Measurement Results

	Zoom Scan
Date	2024-08-22
psSAR1g [W/Kg]	2.10
psSAR10g [W/Kg]	1.36
Power Drift [dB]	0.01
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	Positive / Negative



0 dB = 3.36 W/Kg

Impedance Measurement Plot for Head TSL

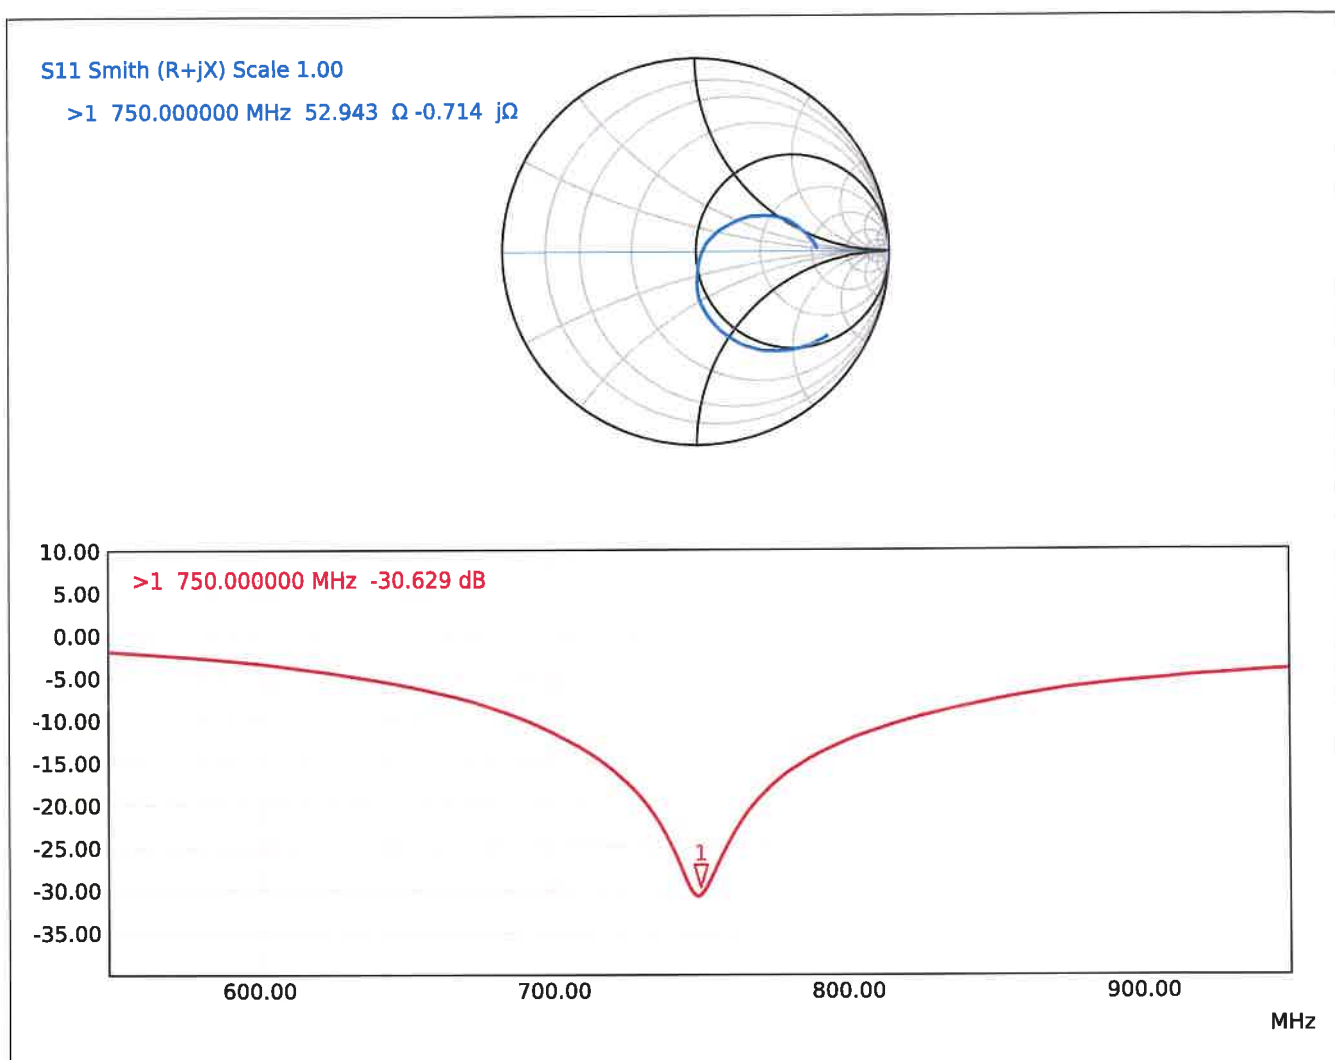

**Calibration Laboratory of
Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

B.V. ADT
Taoyuan City

Certificate No.

D835V2-4d121_Aug24

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d121**

Calibration procedure(s) **QA CAL-05.v12**
Calibration Procedure for SAR Validation Sources between 0.7 - 3 GHz

Calibration date **August 22, 2024**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Cal
Power Sensor R&S NRP-33T	SN: 100967	28-Mar-24 (No. 217-04038)	Mar-25
Power Sensor R&S NRP18A	SN: 101859	21-Mar-24 (No. 4030A315007801)	Mar-25
Spectrum Analyzer R&S FSV40	SN: 101832	25-Jan-24 (No. 4030-315007551)	Jan-25
Mismatch; Short [S4188] Attenuator [S4423]	SN: 1152	28-Mar-24 (No. 217-04050)	Mar-25
OCP DAK-12	SN: 1016	05-Oct-23 (No. OCP-DAK12-1016_Oct23)	Oct-24
OCP DAK-3.5	SN: 1249	05-Oct-23 (No. OCP-DAK3.5-1249_Oct23)	Oct-24
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349_Jun24)	Jun-25
DAE4ip	SN: 1836	10-Jan-24 (No. DAE4ip-1836_Jan24)	Jan-25

Secondary Standards	ID	Check Date (in house)	Scheduled Check
ACAD Source Box	SN: 1000	28-May-24 (No. 675-ACAD_Source_Box-240528)	May-25
Signal Generator R&S SMB100A	SN: 182081	28-May-24 (No. 0001-300719404)	May-25
Mismatch; SMA	SN: 1102	22-May-24 (No. 675-Mismatch_SMA-240522)	May-25

	Name	Function	Signature
Calibrated by	Krešimir Franjić	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: August 22, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 0108

Glossary

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation

- DASY System Handbook

Methods Applied and Interpretation of Parameters

- *Measurement Conditions*: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL*: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss*: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay*: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured*: SAR measured at the stated antenna input power.
- *SAR normalized*: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters*: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY8 Module SAR	16.4.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with spacer
Zoom Scan Resolution	dx, dy = 6mm, dz = 1.5mm	Graded Ratio = 1.5 mm (Z direction)
Frequency	835MHz $\pm$ 1MHz	

Head TSL parameters at 835 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.900 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2)°C	41.9 $\pm$ 6%	0.930 mho/m $\pm$ 6%
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 835 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.44 W/kg $\pm$ 17.0% (k = 2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	1.52 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.05 W/kg $\pm$ 16.5% (k = 2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 835 MHz

Impedance	50.5 Ω – 4.0 j Ω
Return Loss	-27.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

System Performance Check Report

Summary

Dipole	Frequency [MHz]	TSL	Power [dBm]
D835V2 - SN4d121	835	HSL	24

Exposure Conditions

Phantom Section, TSL	Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	15		CW, 0--	835, 0	9.61	0.93	41.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Flat V4.9 mod	HSL, 2024-08-22	EX3DV4 - SN7349, 2024-06-03	DAE4ip Sn1836, 2024-01-10

Scans Setup

	Zoom Scan
Grid Extents [mm]	30 x 30 x 30
Grid Steps [mm]	6.0 x 6.0 x 1.5
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.5
MAIA	N/A
Surface Detection	VMS + 6p
Scan Method	Measured


Measurement Results

	Zoom Scan
Date	2024-08-22
psSAR1g [W/Kg]	2.37
psSAR10g [W/Kg]	1.52
Power Drift [dB]	0.01
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	Positive / Negative

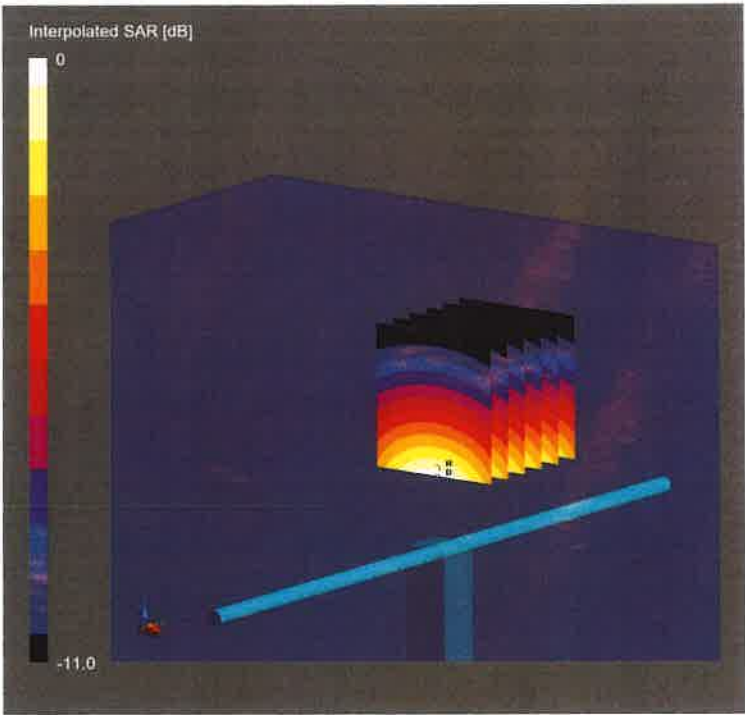

0 dB = 3.79 W/Kg

Impedance Measurement Plot for Head TSL

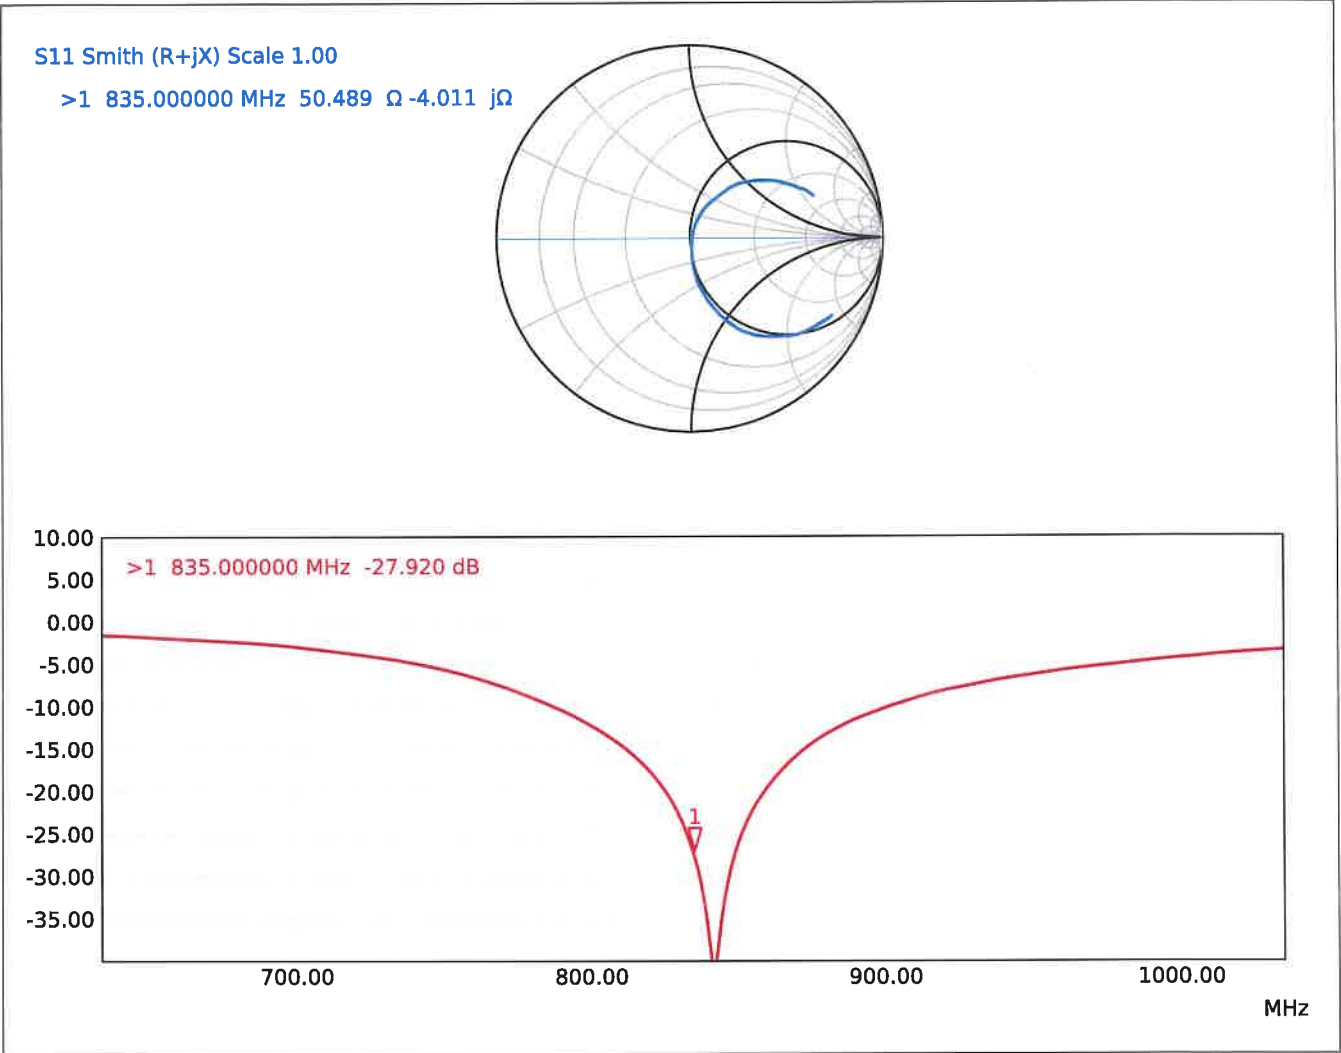



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client

B.V. ADT
Taoyuan City

Certificate No.

D1750V2-1055_Sep24

CALIBRATION CERTIFICATE

Object D1750V2 - SN: 1055

Calibration procedure(s) QA CAL-05.v12
Calibration Procedure for SAR Validation Sources between 0.7 - 3 GHz

Calibration date September 13, 2024

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Cal
Power Sensor R&S NRP-33T	SN: 100967	28-Mar-24 (No. 217-04038)	Mar-25
Power Sensor R&S NRP18A	SN: 101859	22-Jul-24 (No. 4030A315008547)	Jul-25
Spectrum Analyzer R&S FSV40	SN: 101832	25-Jan-24 (No. 4030-315007551)	Jan-25
Mismatch; Short [S4188] Attenuator [S4423]	SN: 1152	28-Mar-24 (No. 217-04050)	Mar-25
OCP DAK-12	SN: 1016	05-Oct-23 (No. OCP-DAK12-1016_Oct23)	Oct-24
OCP DAK-3.5	SN: 1249	05-Oct-23 (No. OCP-DAK3.5-1249_Oct23)	Oct-24
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349_Jun24)	Jun-25
DAE4ip	SN: 1836	10-Jan-24 (No. DAE4ip-1836_Jan24)	Jan-25

Secondary Standards	ID	Check Date (in house)	Scheduled Check
ACAD Source Box	SN: 1000	28-May-24 (No. 675-ACAD_Source_Box-240528)	May-25
Signal Generator R&S SMB100A	SN: 182081	28-May-24 (No. 675-CAL16-S4588-240528)	May-25
Mismatch; SMA	SN: 1102	22-May-24 (No. 675-Mismatch_SMA-240522)	May-25

	Name	Function	Signature
Calibrated by	Paulo Pina	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	
Issued: September 16, 2024			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation

- DASY System Handbook

Methods Applied and Interpretation of Parameters

- *Measurement Conditions*: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL*: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss*: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay*: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured*: SAR measured at the stated antenna input power.
- *SAR normalized*: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters*: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY8 Module SAR	16.4.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with spacer
Zoom Scan Resolution	dx, dy = 6mm, dz = 1.5mm	Graded Ratio = 1.5 mm (Z direction)
Frequency	1750MHz $\pm$ 1MHz	

Head TSL parameters at 1750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2)°C	41.3 $\pm$ 6%	1.34 mho/m $\pm$ 6%
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 1750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	9.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.0 W/kg $\pm$ 17.0% (k = 2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	4.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.7 W/kg $\pm$ 16.5% (k = 2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL at 1750 MHz**

Impedance	48.6 Ω – 1.5 j Ω
Return Loss	-33.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.225 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

System Performance Check Report


Summary			
Dipole	Frequency [MHz]	TSL	Power [dBm]
D1750V2 - SN1055	1750	HSL	24

Exposure Conditions							
Phantom Section, TSL	Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	10		CW, 0--	1750, 0	7.96	1.34	41.3

Hardware Setup			
Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
MFP V8.0 Right	HSL, 2024-09-13	EX3DV4 - SN7349, 2024-06-03	DAE4ip Sn1836, 2024-01-10


Scans Setup	
	Zoom Scan
Grid Extents [mm]	30 x 30 x 30
Grid Steps [mm]	6.0 x 6.0 x 1.5
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.5
MAIA	N/A
Surface Detection	All points
Scan Method	Measured

Measurement Results	
	Zoom Scan
Date	2024-09-13
psSAR1g [W/Kg]	9.29
psSAR10g [W/Kg]	4.95
Power Drift [dB]	0.05
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	Positive / Negative

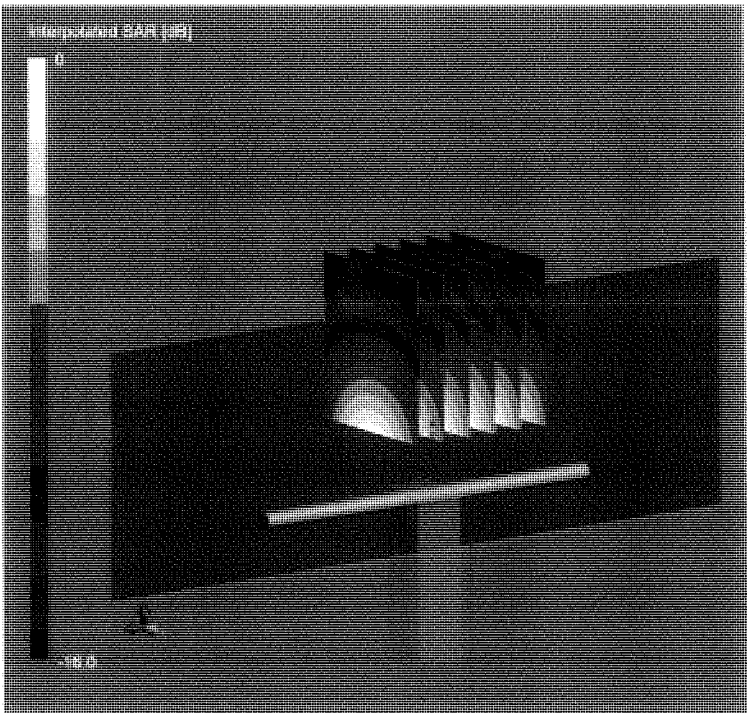

0 dB = 16.2 W/Kg

Impedance Measurement Plot for Head TSL

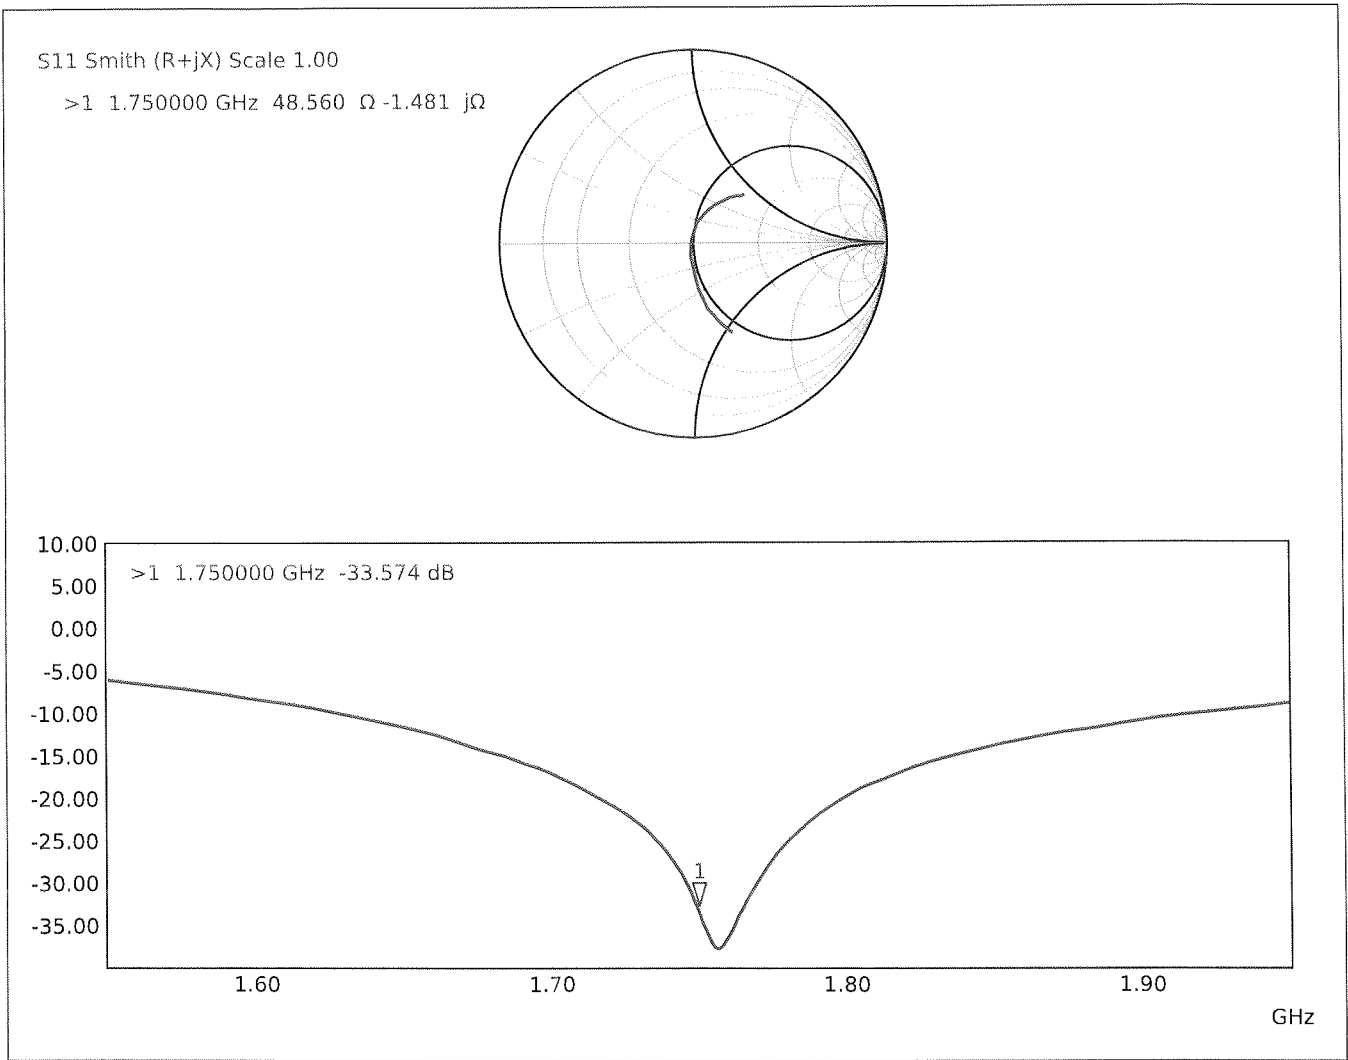



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT**
Taoyuan City

Certificate No. **D1900V2-5d036_Feb24**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d036**

Calibration procedure(s) **QA CAL-05.v12**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **February 19, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-Z91	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: BH9394 (20k)	30-Mar-23 (No. 217-03809)	Mar-24
Type-N mismatch combination	SN: 310982 / 06327	30-Mar-23 (No. 217-03810)	Mar-24
Reference Probe EX3DV4	SN: 7349	03-Nov-23 (No. EX3-7349_Nov23)	Nov-24
DAE4	SN: 601	30-Jan-24 (No. DAE4-601_Jan24)	Jan-25

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Paulo Pina** **Laboratory Technician**

Approved by: **Sven Kühn** **Technical Manager**

Signature

Issued: February 20, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.4 $\pm$ 6 %	1.40 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.0 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.3 \Omega + 6.3 j\Omega$
Return Loss	- 24.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 19.02.2024

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d036

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 03.11.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2024
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm


Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 14.8 W/kg

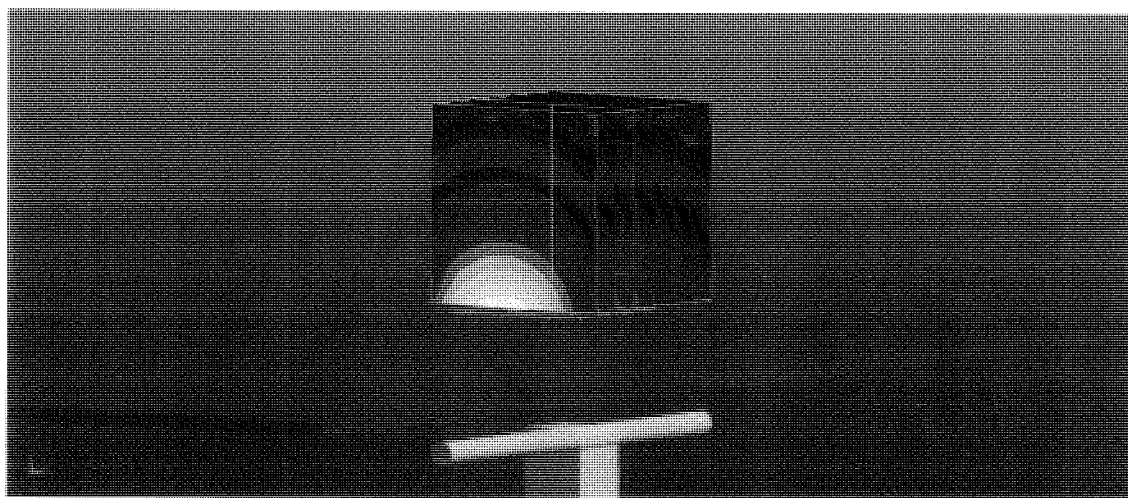

0 dB = 14.8 W/kg = 11.70 dBW/kg

Impedance Measurement Plot for Head TSL

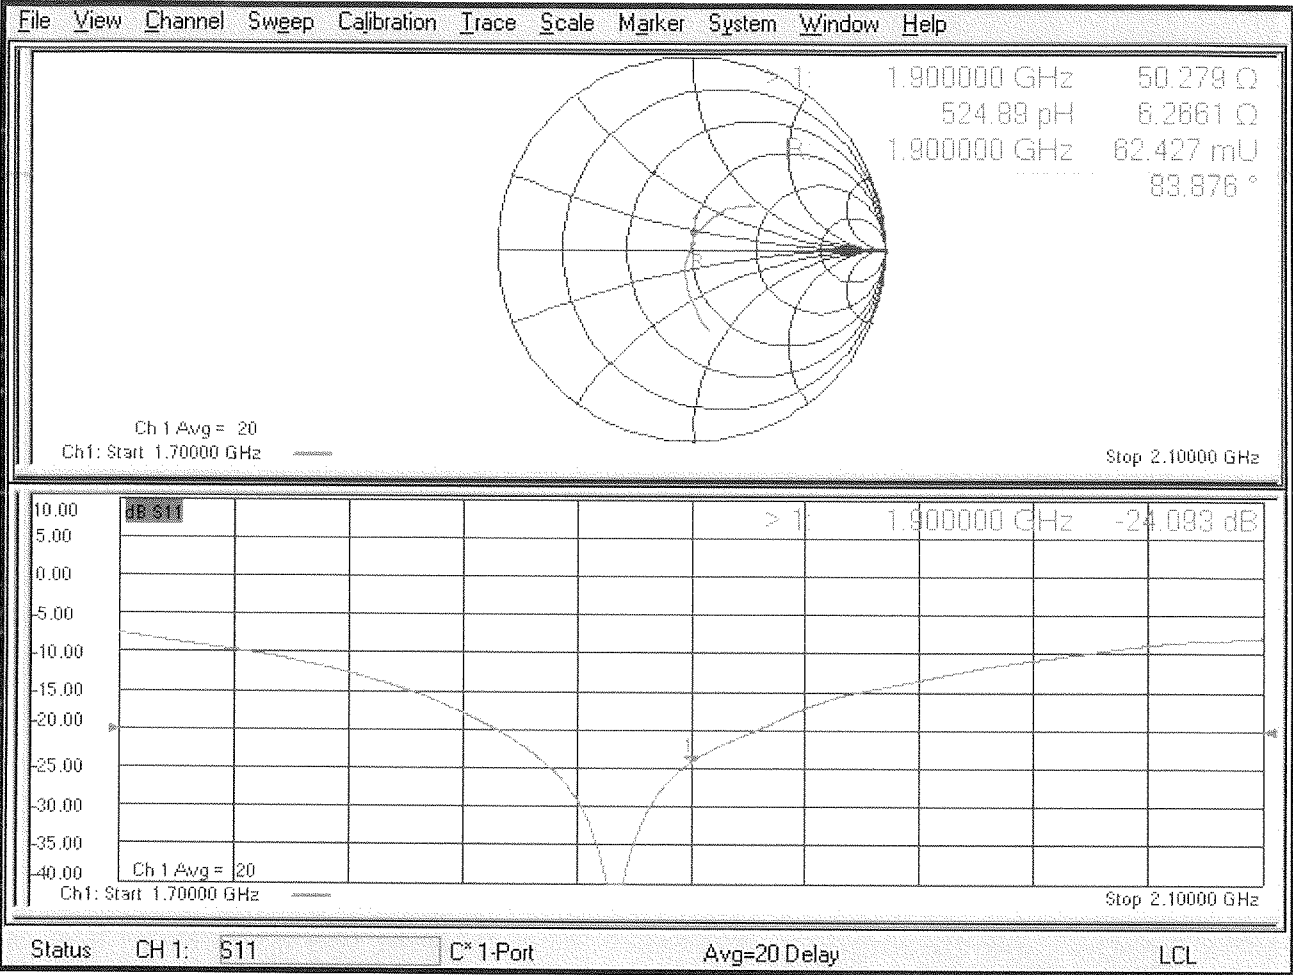



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT**
Taoyuan City

Certificate No. **D2450V2-737_Feb24**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:737**

Calibration procedure(s) **QA CAL-05.v12**
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: **February 19, 2024**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-Z91	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: BH9394 (20k)	30-Mar-23 (No. 217-03809)	Mar-24
Type-N mismatch combination	SN: 310982 / 06327	30-Mar-23 (No. 217-03810)	Mar-24
Reference Probe EX3DV4	SN: 7349	03-Nov-23 (No. EX3-7349_Nov23)	Nov-24
DAE4	SN: 601	30-Jan-24 (No. DAE4-601_Jan24)	Jan-25

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Krešimir Franjić** **Laboratory Technician** 

Approved by: **Sven Kühn** **Technical Manager** 

Issued: February 19, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.5 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.2 \Omega + 5.2 j\Omega$
Return Loss	- 23.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 19.02.2024

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:737

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96) @ 2450 MHz; Calibrated: 03.11.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2024
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.0 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.26 W/kg


Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 21.6 W/kg

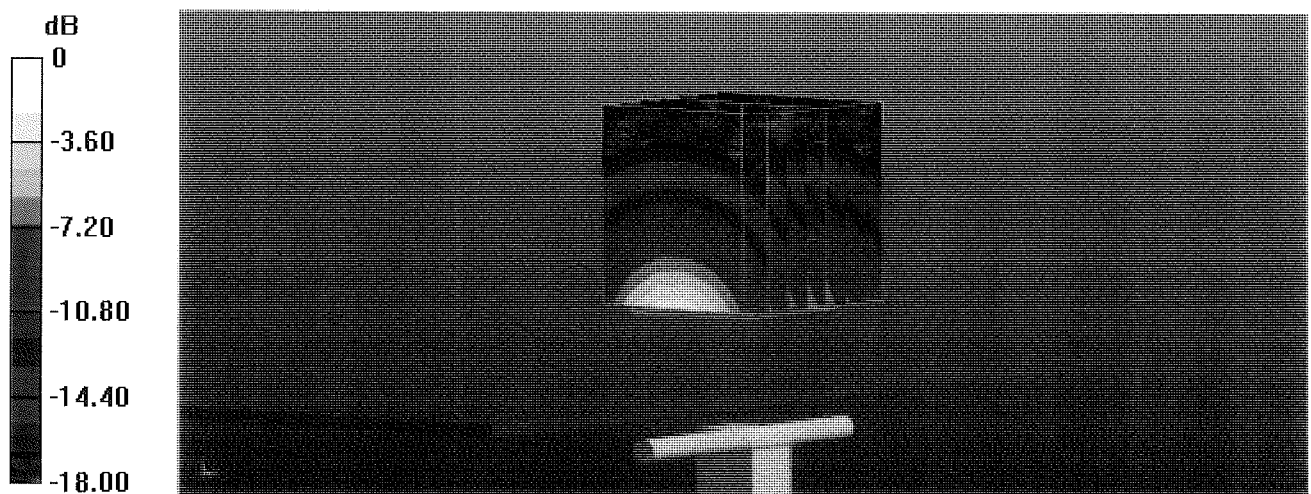

Impedance Measurement Plot for Head TSL

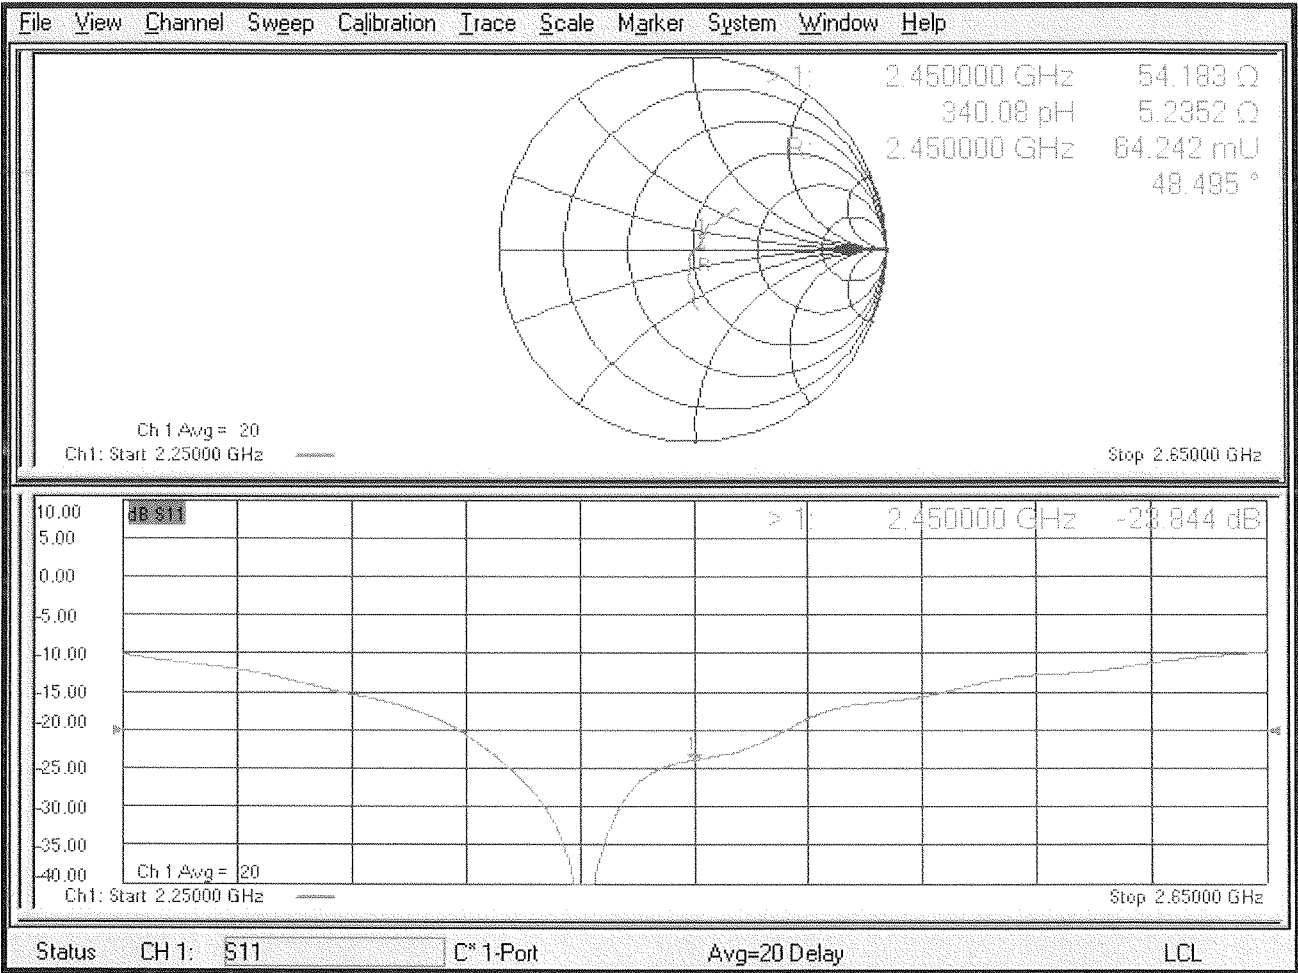



Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client

B.V. ADT
Taoyuan City

Certificate No.

D2600V2-1020_Aug24

CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1020**

Calibration procedure(s) **QA CAL-05.v12**
Calibration Procedure for SAR Validation Sources between 0.7 - 3 GHz

Calibration date **August 15, 2024**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Cal
Power Sensor R&S NRP-33T	SN: 100967	28-Mar-24 (No. 217-04038)	Mar-25
Power Sensor R&S NRP18A	SN: 101859	21-Mar-24 (No. 4030A315007801)	Mar-25
Spectrum Analyzer R&S FSV40	SN: 101832	25-Jan-24 (No. 4030-315007551)	Jan-25
Mismatch; Short [S4188] Attenuator [S4423]	SN: 1152	28-Mar-24 (No. 217-04050)	Mar-25
OCP DAK-12	SN: 1016	05-Oct-23 (No. OCP-DAK12-1016_Oct23)	Oct-24
OCP DAK-3.5	SN: 1249	05-Oct-23 (No. OCP-DAK3.5-1249_Oct23)	Oct-24
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349_Jun24)	Jun-25
DAE4ip	SN: 1836	10-Jan-24 (No. DAE4ip-1836_Jan24)	Jan-25

Secondary Standards	ID	Check Date (in house)	Scheduled Check
ACAD Source Box	SN: 1000	28-May-24 (No. 675-ACAD_Source_Box-240528)	May-25
Signal Generator R&S SMB100A	SN: 182081	28-May-24 (No. 0001-300719404)	May-25
Mismatch; SMA	SN: 1102	22-May-24 (No. 675-Mismatch_SMA-240522)	May-25

	Name	Function	Signature
Calibrated by	Krešimir Franjić	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: August 16, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 0108

Glossary

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation

- DASY System Handbook

Methods Applied and Interpretation of Parameters

- *Measurement Conditions*: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL*: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss*: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay*: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured*: SAR measured at the stated antenna input power.
- *SAR normalized*: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters*: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY8 Module SAR	16.4.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with spacer
Zoom Scan Resolution	dx, dy = 5mm, dz = 1.5mm	Graded Ratio = 1.5 mm (Z direction)
Frequency	2600MHz $\pm$ 1MHz	

Head TSL parameters at 2600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2)°C	37.3 $\pm$ 6%	2.00 mho/m $\pm$ 6%
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 2600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	14.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.7 W/kg $\pm$ 17.0% (k = 2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR for nominal Head TSL parameters	24 dBm input power	6.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg $\pm$ 16.5% (k = 2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL at 2600 MHz**

Impedance	48.6 Ω – 5.8 j Ω
Return Loss	-24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.158 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

System Performance Check Report

Summary

Dipole	Frequency [MHz]	TSL	Power [dBm]
D2600V2 - SN1020	2600	HSL	24

Exposure Conditions

Phantom Section, TSL	Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	10	CW, 0--	2600, 0		7.29	2.00	37.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
MFP V8.0 Center	HSL, 2024-08-15	EX3DV4 - SN7349, 2024-06-03	DAE4ip Sn1836, 2024-01-10

Scans Setup

	Zoom Scan
Grid Extents [mm]	30 x 30 x 30
Grid Steps [mm]	5.0 x 5.0 x 1.5
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.5
MAIA	N/A
Surface Detection	VMS + 6p
Scan Method	Measured

Measurement Results

	Zoom Scan
Date	2024-08-15
psSAR1g [W/Kg]	14.0
psSAR10g [W/Kg]	6.31
Power Drift [dB]	0.00
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	Positive / Negative

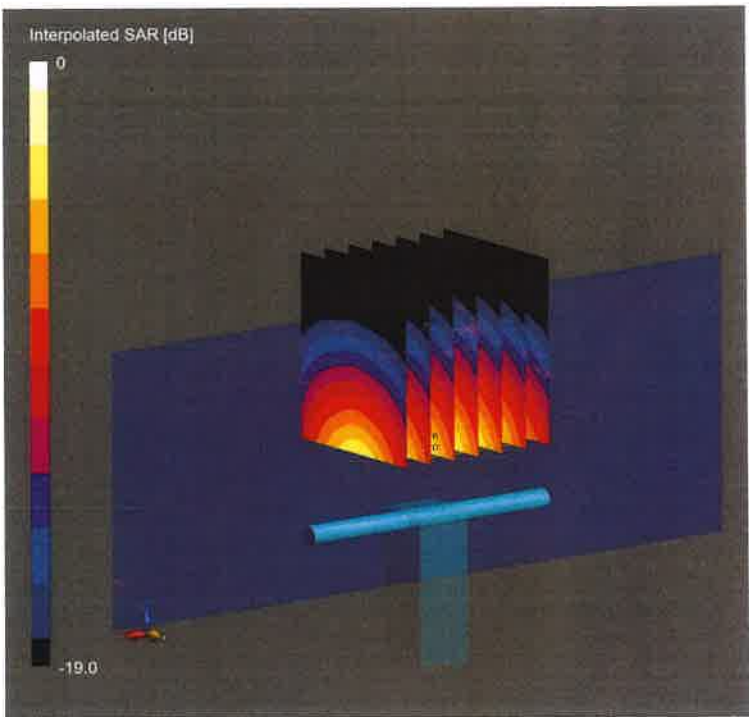

0 dB = 29.9 W/Kg

Impedance Measurement Plot for Head TSL