

Regulatory WWAN Antenna Information

(English Language Required for Intel Regulatory Review / Approval)

Platform	
Platform Owner	DELL
Brand Name	DELL
Model Name	P174G
ODM	COMPAL ELECTRONICS
Target Launch Date	
Antenna	
Manufacturer	WNC
Part Number	■ Tx1/Rx1 Antenna WWAN Main: Antenna P/N: Main: 81ELA715.G27 COMPAL P/N: DC33002RO1L
	■ Rx2 Antenna WWAN Aux : Antenna P/N: Aux: 81ELA715.G27 COMPAL P/N: DC33002RO1L
	■ Tx2/Rx3 Antenna WWAN Aux : Antenna P/N: Main: 81ELA715.GCT COMPAL P/N: DC33002WC0L
	■ Rx4 Antenna WWAN Aux : Antenna P/N: Main: 81ELA715.GCT COMPAL P/N: DC33002WC0L
Manufacturer address	
Module	
With WWAN Module	SDX62/SDX12
(Check Box)	

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs <u>and</u> Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission).</u> <u>Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

Antenna Information

Section 1. Antenna Assembly Specifications

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	1D *Peak Gain W/ Cable loss (dBi)
WCDMA/ LTE/5G NR FR1	1	1920	1980	Ant0 : 81ELA715.G27	WNC	PIFA	1.93
WCDMA/ LTE/5G NR FR1	2	1850	1910				-0.53
LTE/5G NR FR1	3	1710	1785				2.54
WCDMA/ LTE	4	1710	1755				2.54
WCDMA/ LTE/5G NR FR1	5	824	849				-0.48
LTE/5G NR FR1	7	2500	2570				1.76
WCDMA/ LTE/5G NR FR1	8	880	915				-1.74
LTE/5G NR FR1	12	699	716				1.67
LTE/5G NR FR1	13	777	787				1.69
LTE/5G NR FR1	14	788	798				0.53
LTE	17	704	716				1.67
LTE/5G NR FR1	18	815	830				-0.51
LTE	19	830	845				-0.48
LTE/5G NR FR1	20	832	862				-0.48
LTE/5G NR FR1	25	1850	1915				-0.40
LTE/5G NR FR1	26	814	849				-0.48
LTE/5G NR FR1	28	703	748				1.79
LTE/5G NR FR1	30	2305	2315				0.85
LTE	34	2010	2025				2.33
LTE/5G NR FR1	38	2570	2620				0.32
LTE	39	1880	1920				-0.27
LTE/5G NR FR1	40	2300	2400				2.24
LTE/5G NR FR1	41	2496	2690				1.92
LTE	42	3400	3600				0.73
LTE	43	3600	3800				-1.60
LTE/5G NR FR1	48	3550	3700				-0.21
LTE/5G NR FR1	66	1710	1780				2.54
LTE/5G NR FR1	71	663	698				-1.04
5G NR FR1	77	3300	4200				0.73
5G NR FR1	78	3300	3800				0.73
5G NR FR1	79	4400	5000				-2.42
5G NR FR1	53	2483.5	2495				1.94
5G NR FR1	70	1695	1710				2.54

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V

Communication System	Band	Frequency(MHz) from low to high spectrum		1A Part Number for Antenna Assembly	1B Antenna Manufacturer Name	1C Description of Antenna Type	Tx2 *Peak Gain W/ Cable loss (dBi)
WCDMA/ LTE FDD	1	1920	1980	Antenna P/N: Main: 81ELA715.GCT COMPAL P/N: DC33002WC0L	WNC	MIMO	0.23
WCDMA/ LTE FDD	2	1850	1910				0.04
LTE FDD	3	1710	1785				-1.91
WCDMA/ LTE FDD	4	1710	1755				-1.91
LTE FDD	7	2500	2570				-1.02
LTE FDD	25	1850	1915				0.04
LTE FDD	30	2305	2315				0.54
LTE FDD	66	1710	1780				-1.91
LTE TDD	38	2570	2620				0.26
LTE TDD	39	1880	1920				0.04
LTE TDD	40	2300	2400				0.54
LTE TDD	41	2496	2690				1.07
LTE TDD	42	3400	3600				0.74
LTE TDD	43	3600	3800				0.37
LTE TDD	48	3550	3700				0.06

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V

Antenna Peak Gain Table:
Low and middle band

	Tx1 antenna
Frequency (MHz)	Peak Gain W/ Cable loss (dBi)
663	-1.04
680.5	-1.17
698	-2.58
699	-0.06
703	0.71
704	0.81
707.5	1.06
710	1.21
716	1.67
725.5	1.79
748	0.13
777	1.69
782	1.20
787	0.66
788	0.53
793	-0.06
798	-0.60
814	-0.78
815	-0.77
822.5	-0.63
824	-0.60
830	-0.51
831.5	-0.49
832	-0.48
836.5	-0.49
837.5	-0.50
845	-0.69
847	-0.76
849	-0.82
862	-1.56
880	-1.74
897.5	-3.14
915	-1.86

High band


	Tx1 antenna	Tx2 antenna (Mimo2)
Frequency (MHz)	Peak Gain W/ Cable loss (dBi)	Peak Gain W/ Cable loss (dBi)
1695	2.50	-1.36
1702.5	2.53	-1.58
1710	2.54	-1.91
1732.5	2.48	-2.83
1745	2.38	-2.84
1747.5	2.35	-2.89
1755	2.10	-3.10
1780	0.64	-3.57
1785	0.67	-3.40
1850	-0.53	-1.87
1880	-0.81	-0.04
1882.5	-0.85	0.02
1900	-0.88	0.04
1910	-0.53	-0.03
1915	-0.40	-0.07
1920	-0.27	-0.05
1950	0.85	-0.02
1980	1.93	0.23
2010	2.33	1.09
2017.5	2.32	1.33
2025	2.30	1.36
2300	2.24	0.53
2305	0.15	0.52
2310	0.03	0.54
2315	0.85	0.51
2350	0.31	-0.17
2400	0.92	-0.66
2483.5	1.82	-0.87
2489.25	1.87	-0.88
2495	1.94	-0.79
2496	1.92	-0.81
2500	1.76	-1.02
2535	1.02	-1.32
2570	0.32	-1.38
2593	0.23	-0.02
2595	0.24	0.03
2620	0.27	0.26
2690	0.87	1.07

3300	0.53	0.46
3400	0.73	0.63
3500	0.54	0.74
3550	-0.21	0.06
3600	-1.60	-0.25
3625	-2.68	-0.73
3700	-4.65	0.02
3750	-4.04	0.22
3800	-3.67	0.37
4200	0.24	-0.91
4400	-2.42	-1.81
4700	-2.83	1.81
5000	-5.28	0.42


Section 2. Dimensioned Photos or Drawings of Antennas


Include a dimensioned photo and dimensioned drawing of Main antenna here.

TPx Antenna Dimensioned Drawing:

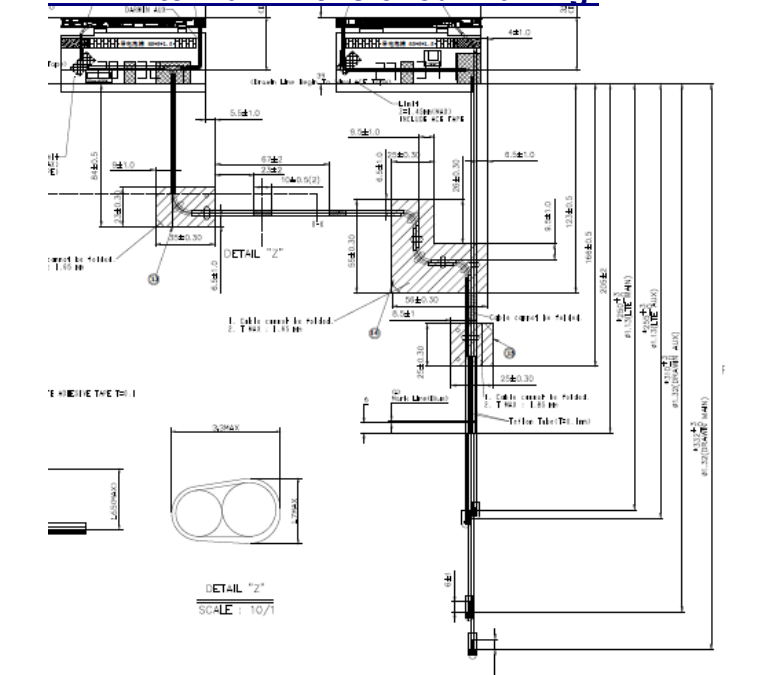


TPx Antenna Photo:

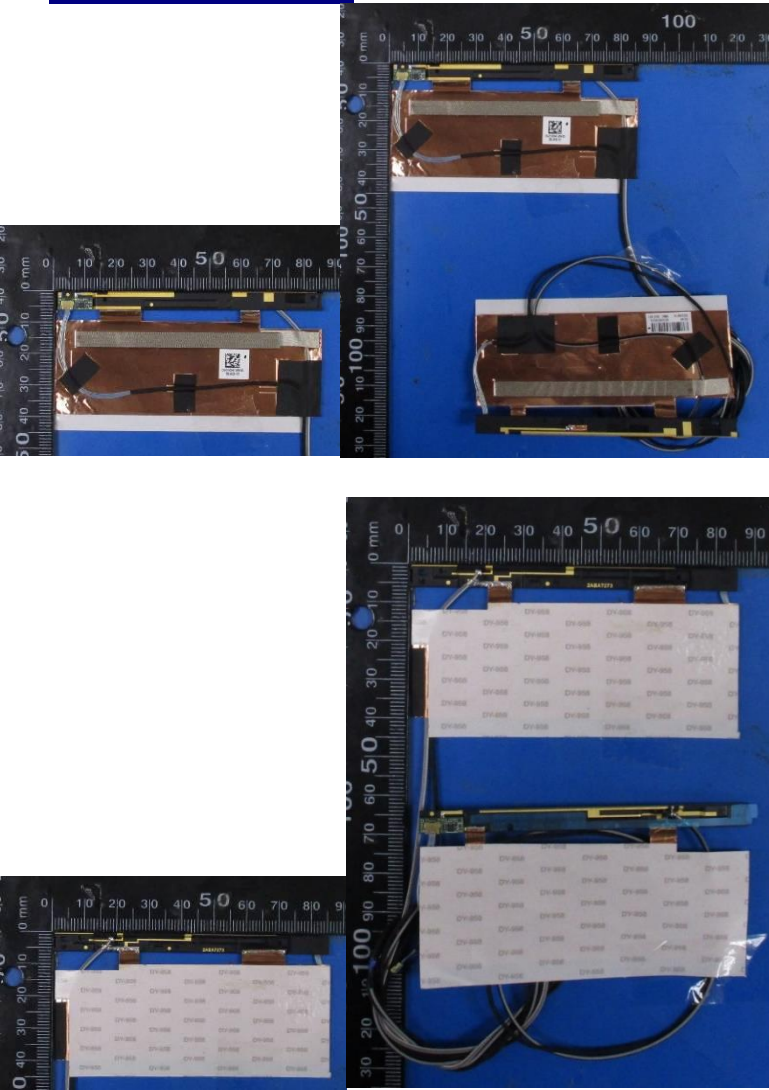

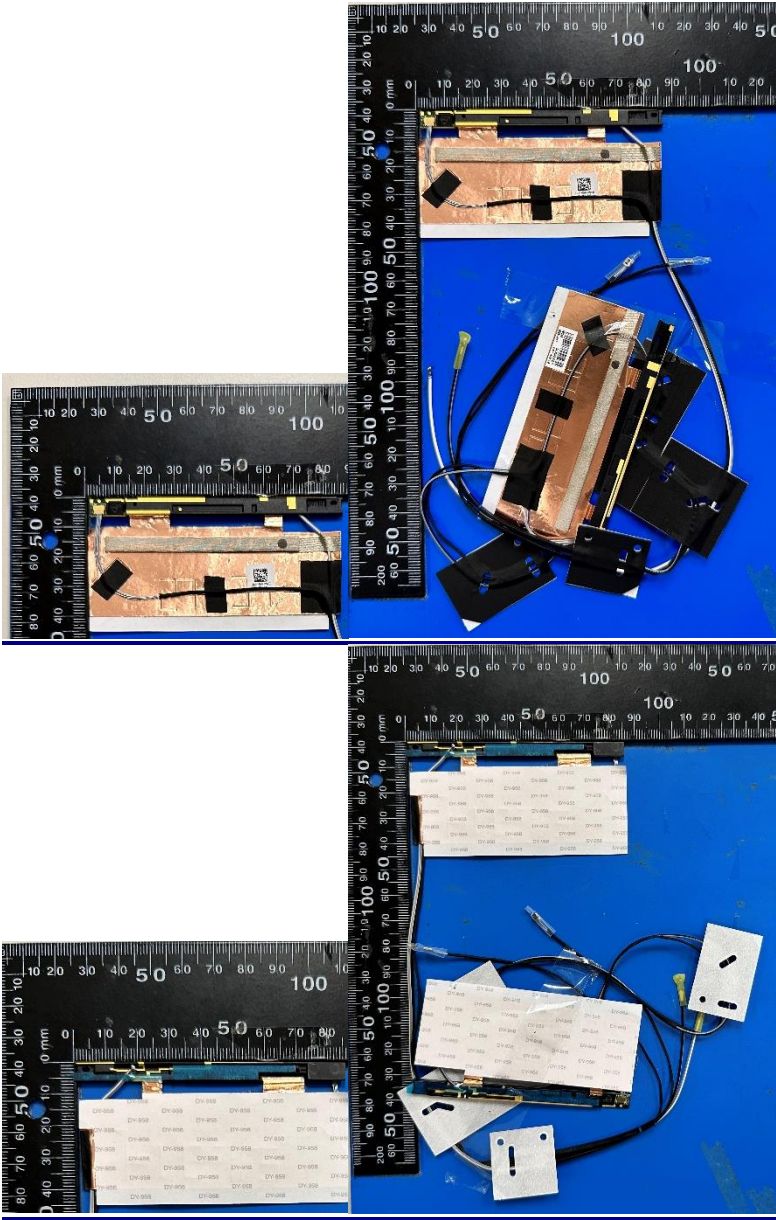



Include a dimensioned photo and dimensioned drawing of Aux antenna here.

DRx Antenna Dimensioned Drawing:

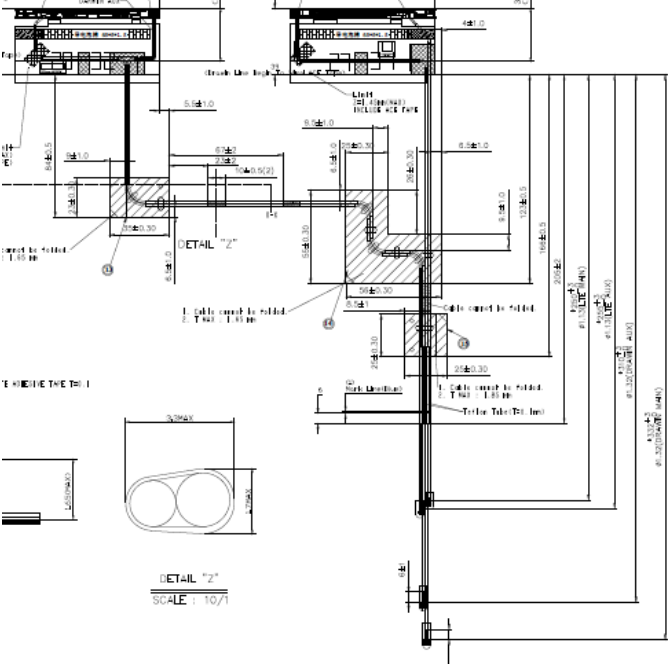


DRx Antenna Photo:

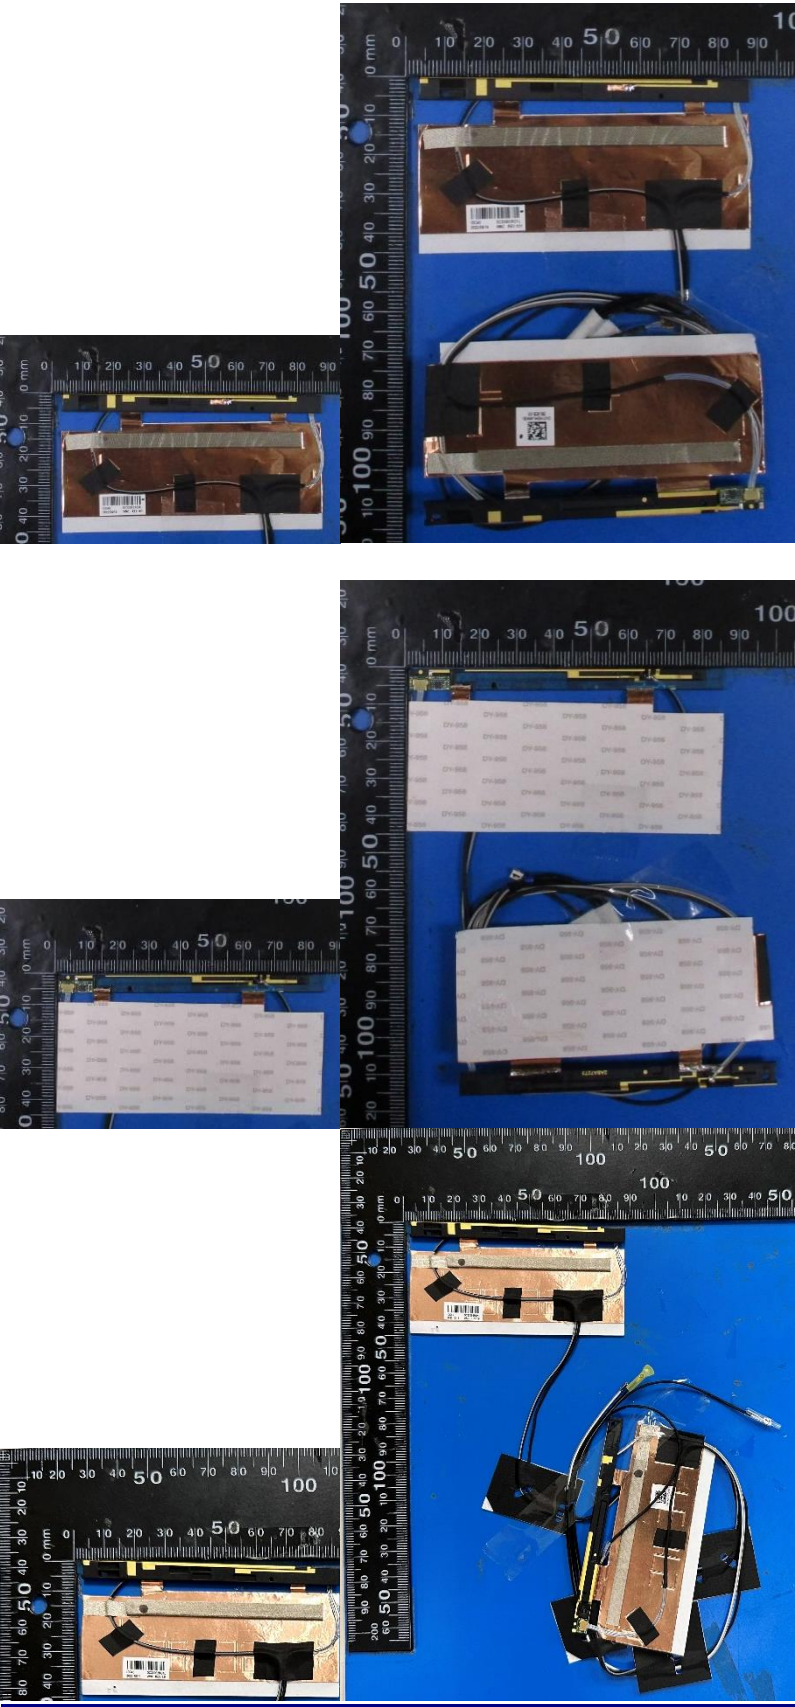

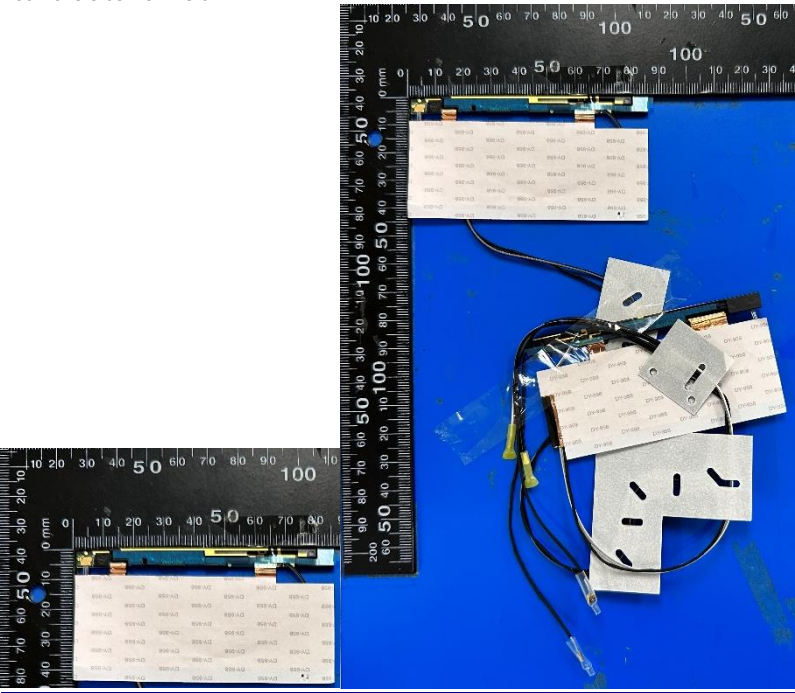

Include a dimensioned photo and dimensioned drawing of Aux antenna here.

DRx2 Antenna Dimensioned Drawing:

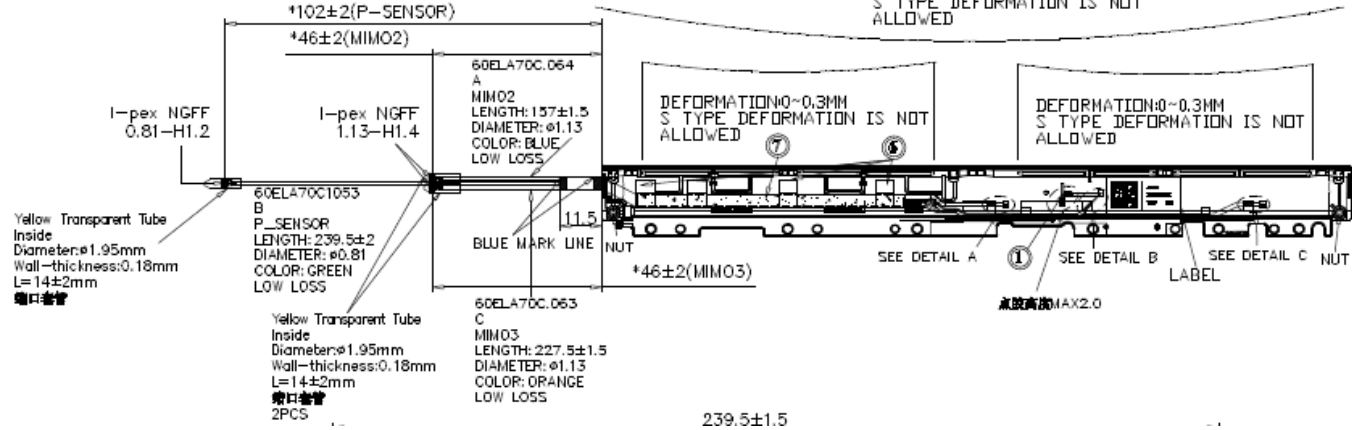


DRx2 Antenna Photo:




Include a dimensioned photo and dimensioned drawing of Aux antenna here.

DRx1 Antenna Dimensioned Drawing:

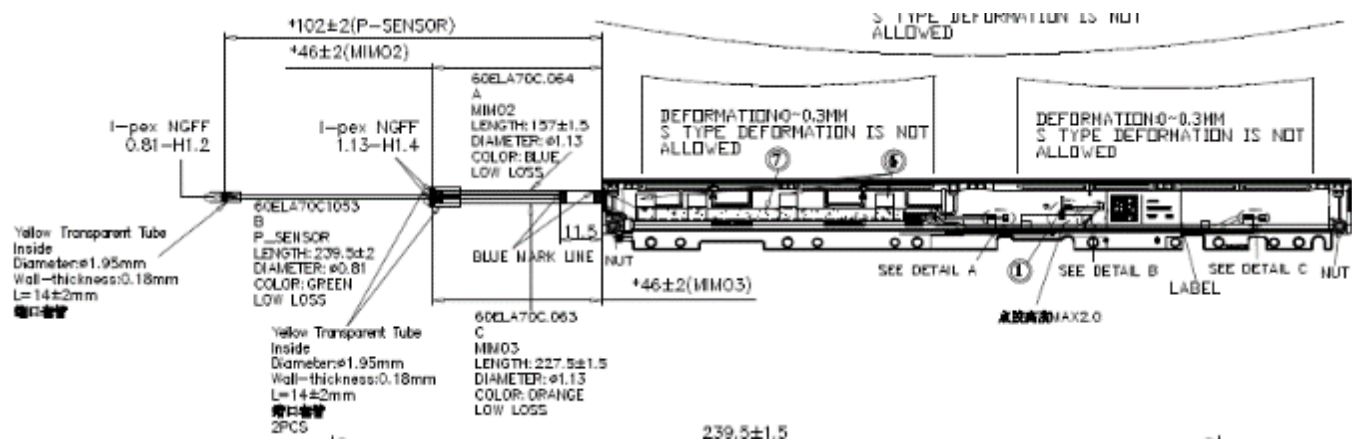


DRx1 Antenna Photo:

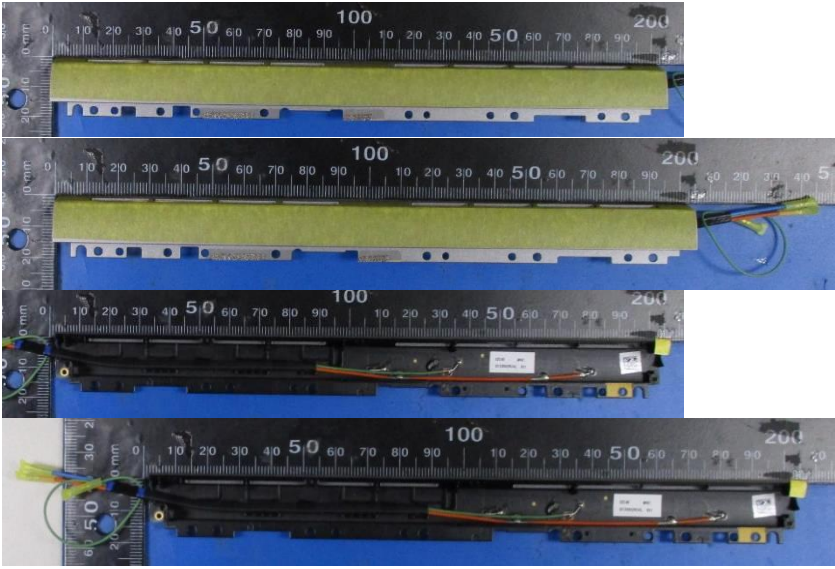

Include front view photo of all 2 antennas here.

Antenna Manufacturer: WNC


Antenna Part Number: 81ELA715.G27(DC33002RO1L)/ 81ELA715.GCT(DC33002WC0L)

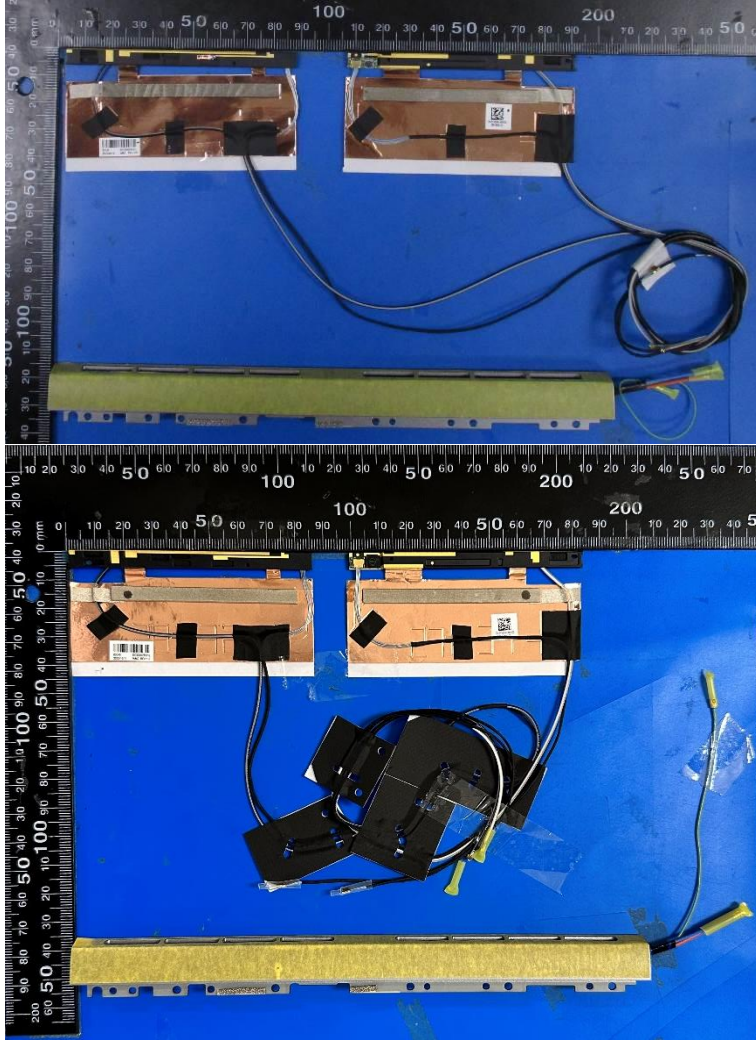


Include back view photo of all 2 antennas here.

Antenna Manufacturer: WNC

Antenna Part Number: 81ELA715.G27(DC33002RO1L)/ 81ELA715.GCT(DC33002WC0L)

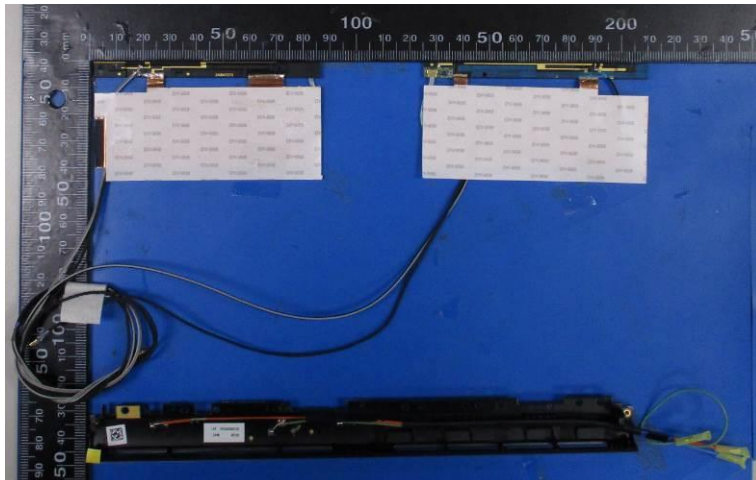

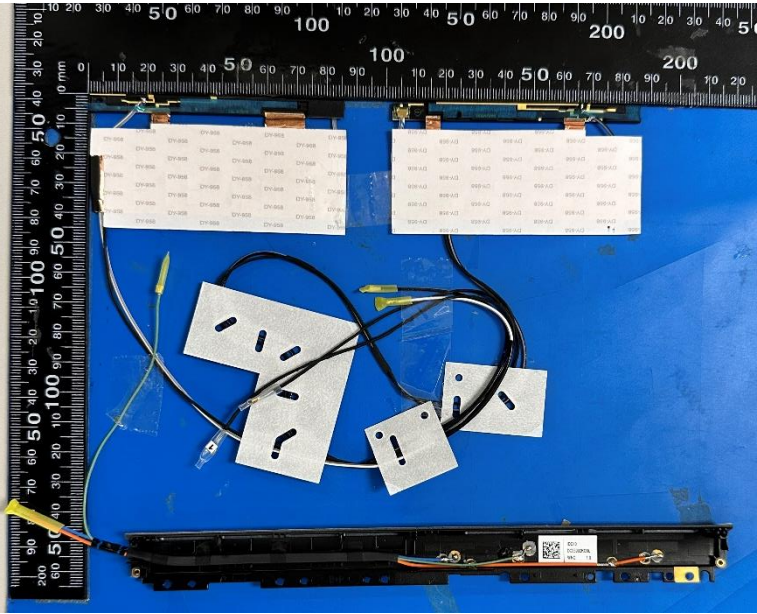


Note: antenna photo should include L type ruler

Section 3. Radiation characteristics of antennae Loaded in Host Platform


WWAN Main Antenna (Tx1)

663MHz

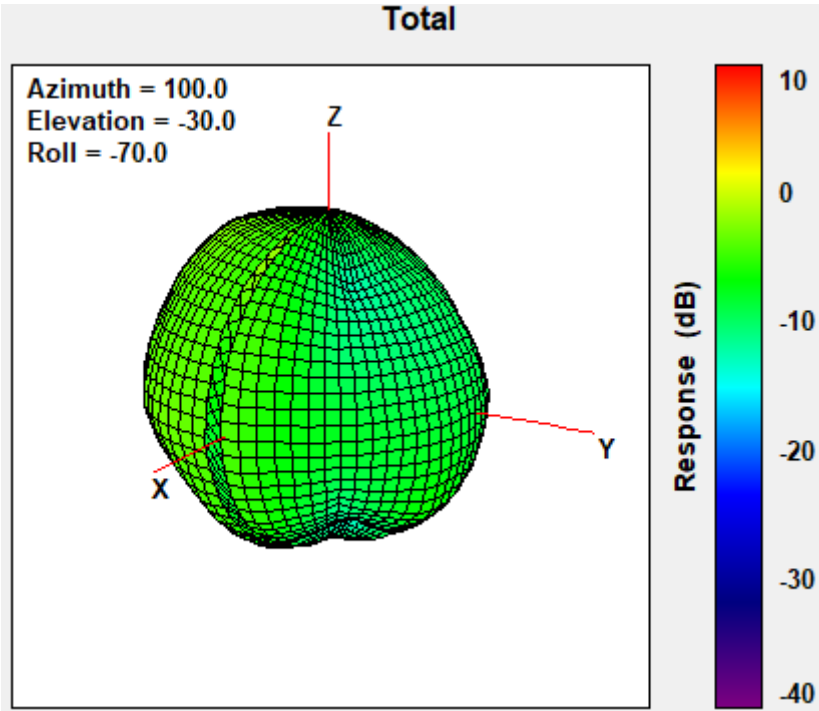


Center Frequency	663MHz
Peak Gain W/ Cable loss (dBi)	-1.04

680.5MHz

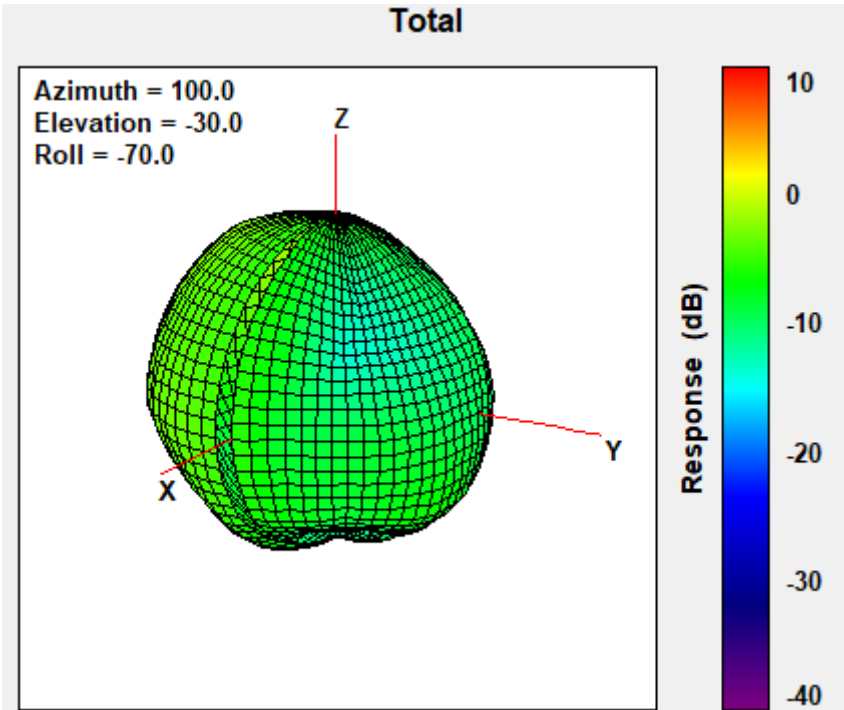


Center Frequency	680.5 MHz
Peak Gain W/ Cable loss (dBi)	-1.17


698MHz

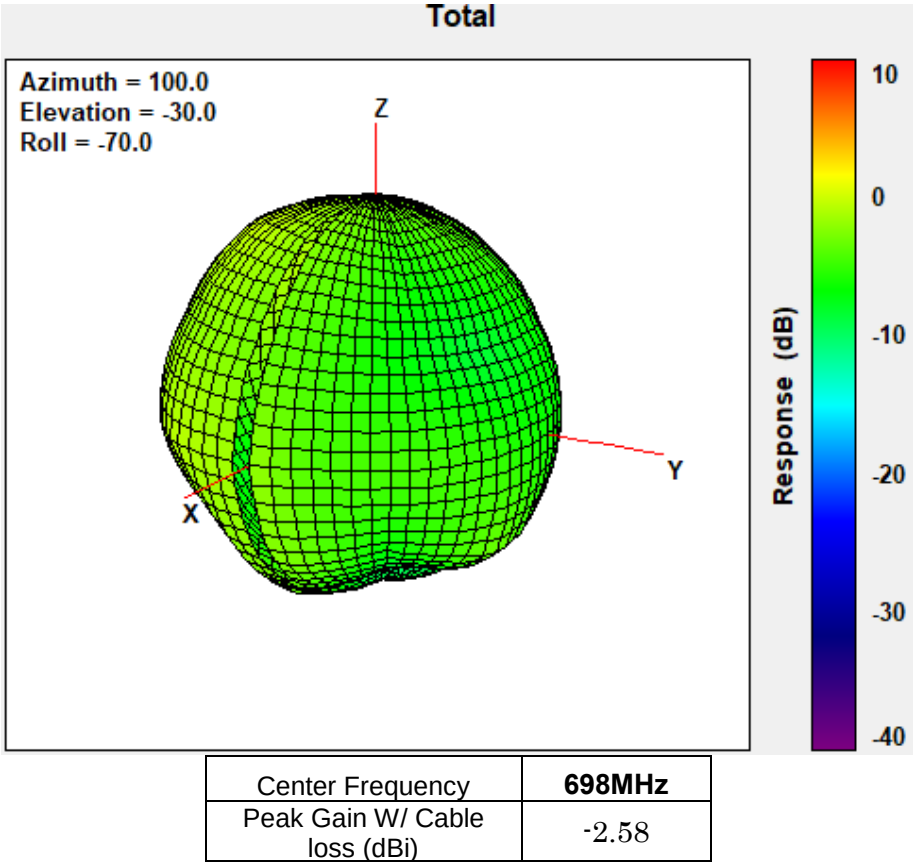

699MHz

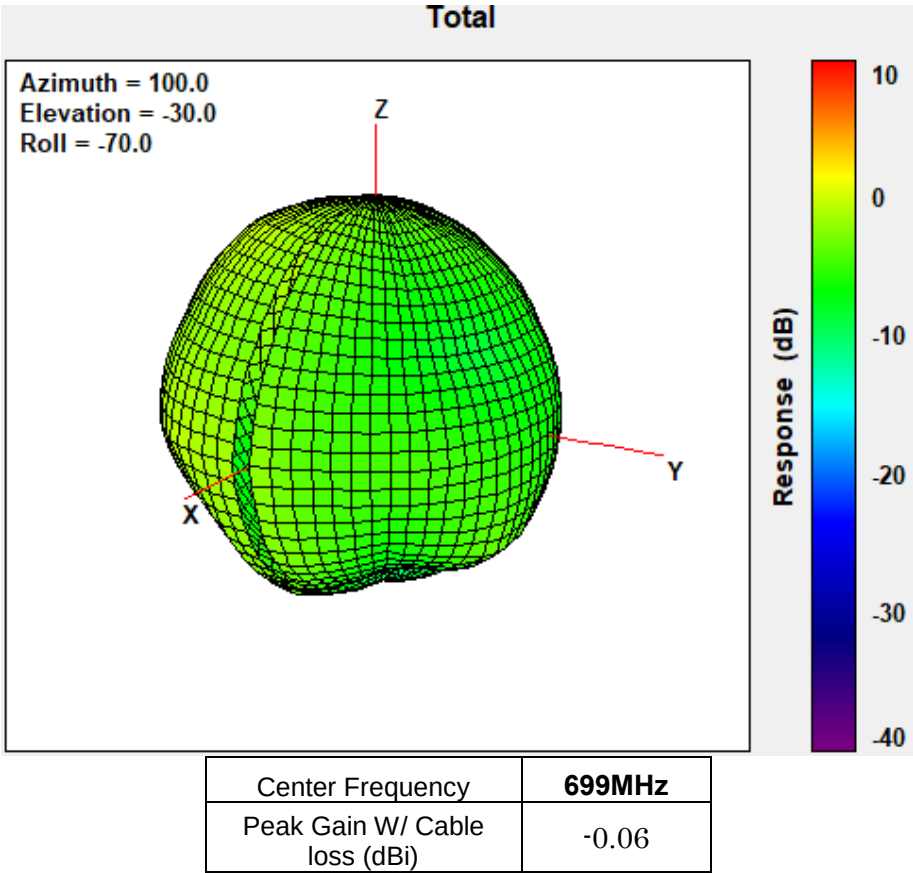


703MHz

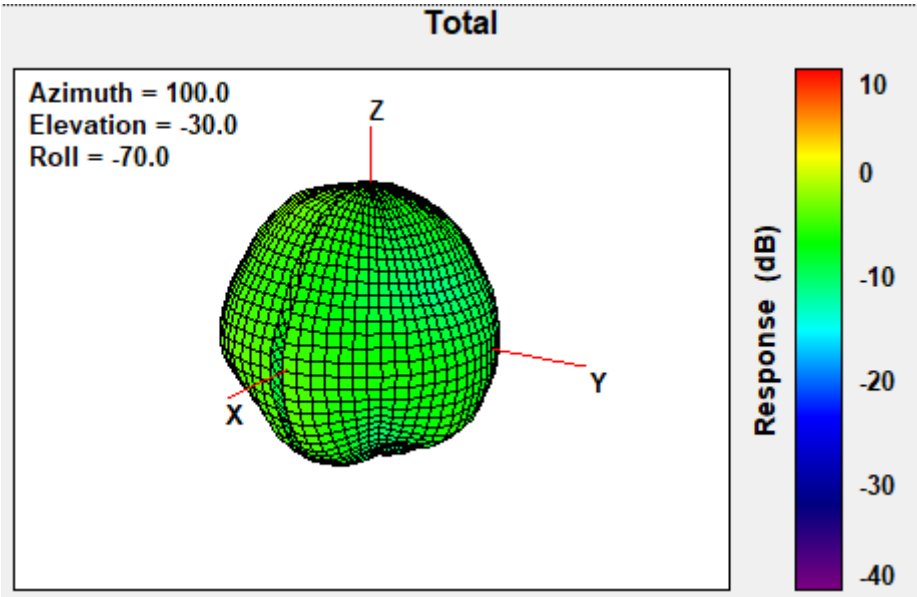


Center Frequency	703MHz
Peak Gain W/ Cable loss (dBi)	0.71

704MHz

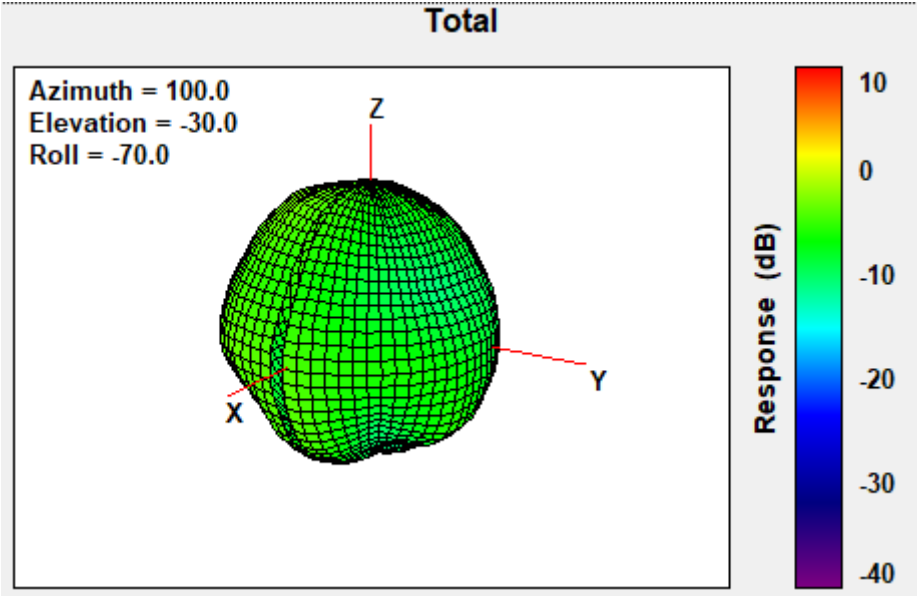


Center Frequency	704MHz
Peak Gain W/ Cable loss (dBi)	0.81

707.5MHz

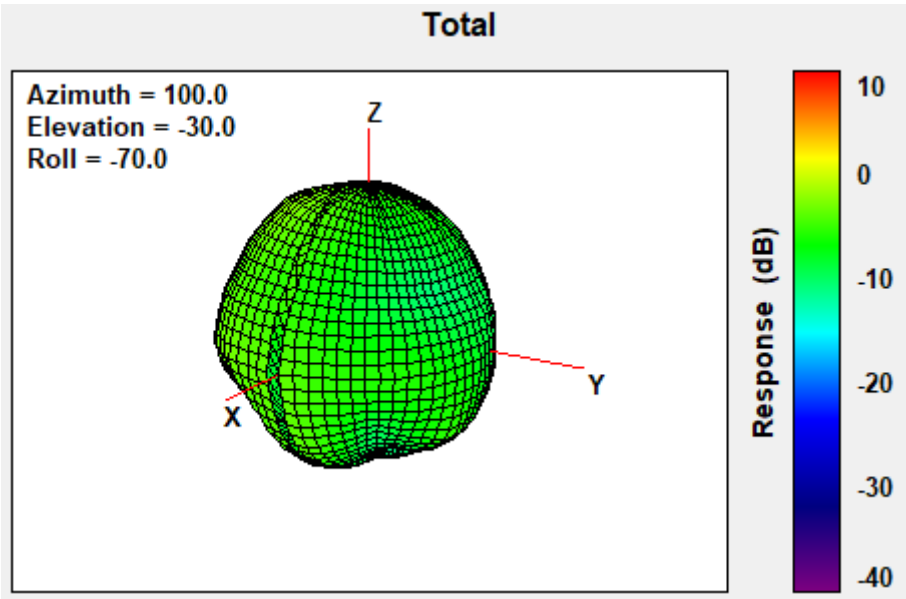


Center Frequency	707.5MHz
Peak Gain W/ Cable loss (dBi)	1.06

710MHz

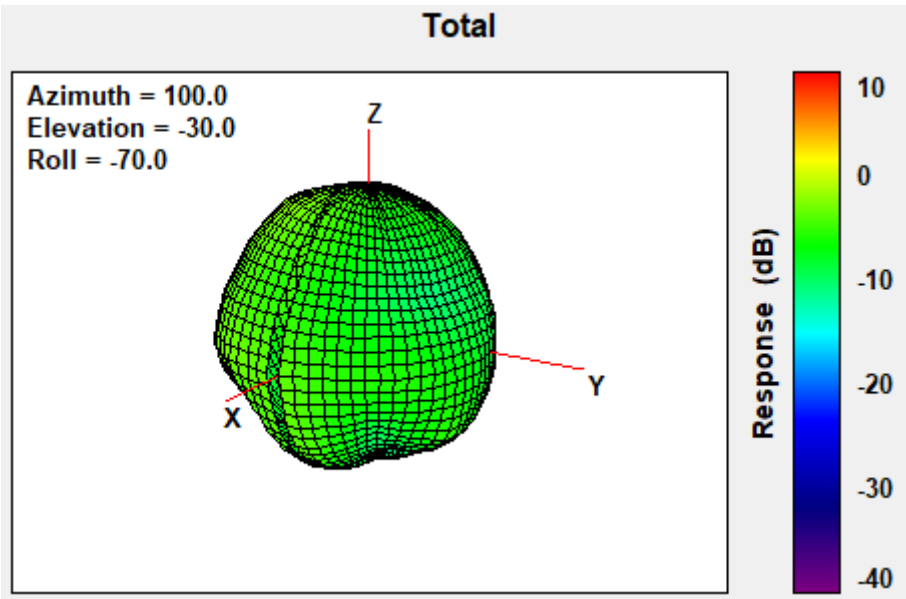


Center Frequency	710MHz
Peak Gain W/ Cable loss (dBi)	1.21

716MHz

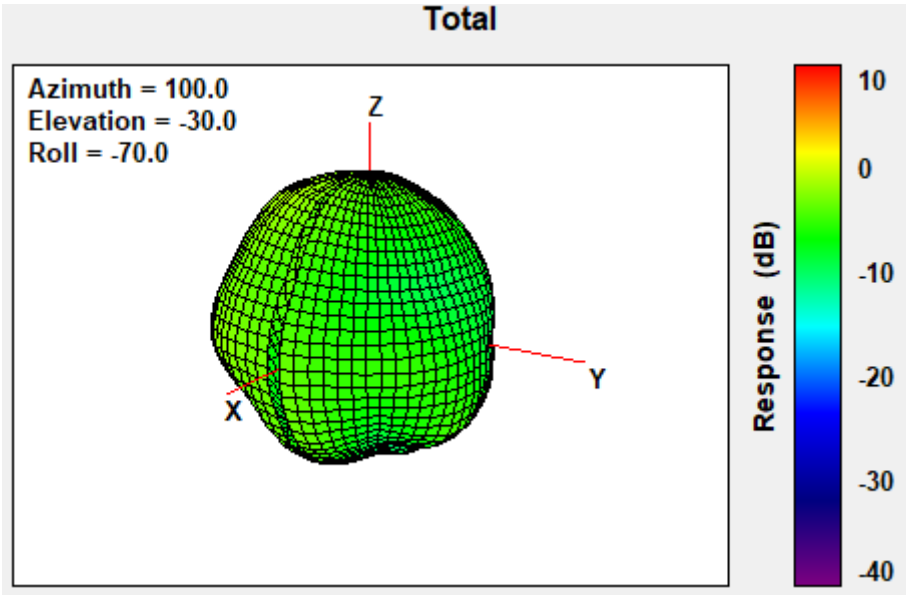


Center Frequency	716MHz
Peak Gain W/ Cable loss (dBi)	1.67

725.5MHz

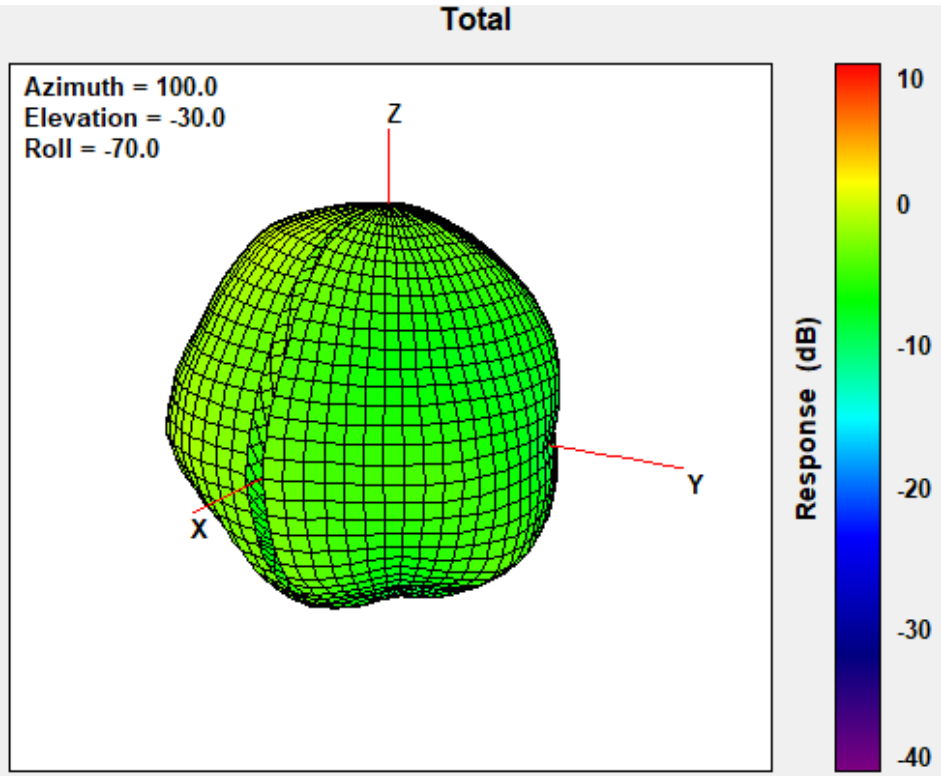


Center Frequency	725.5MHz
Peak Gain W/ Cable loss (dBi)	1.79


748MHz

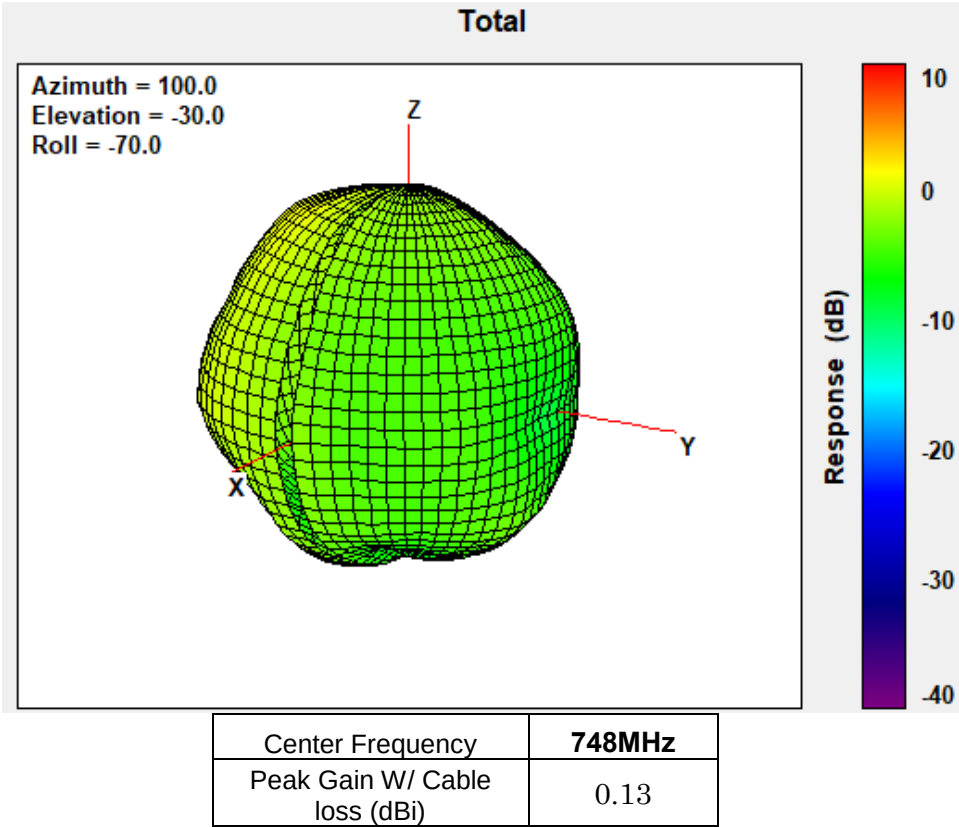


777MHz

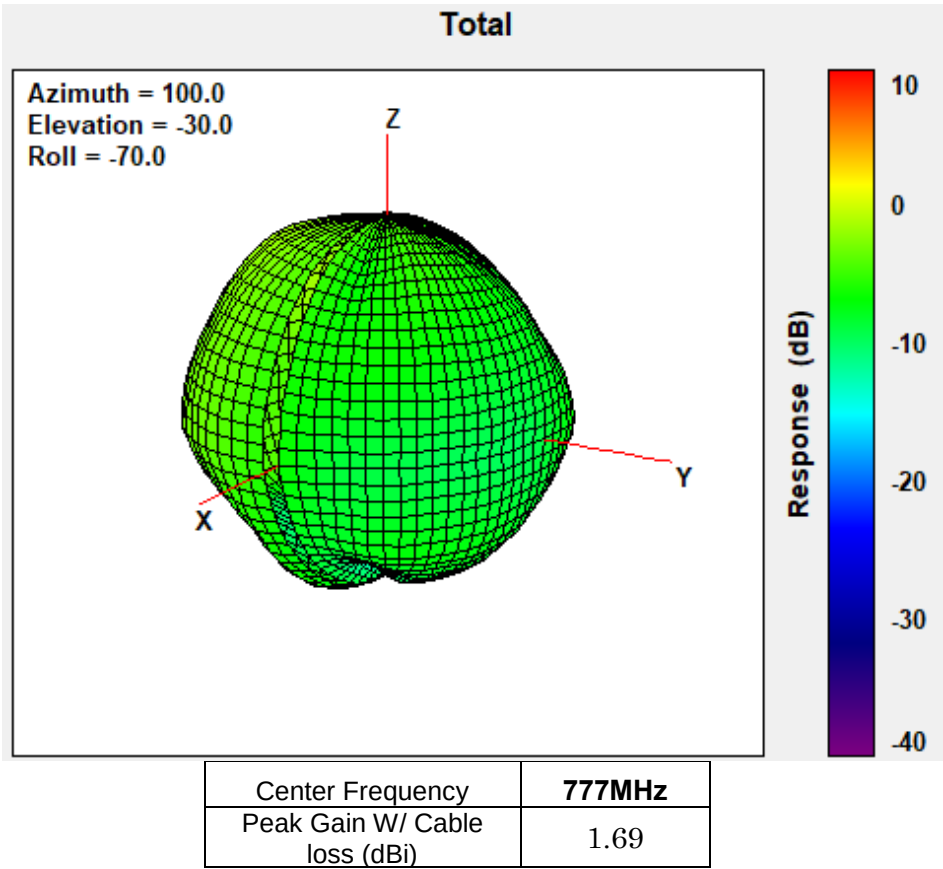


782MHz

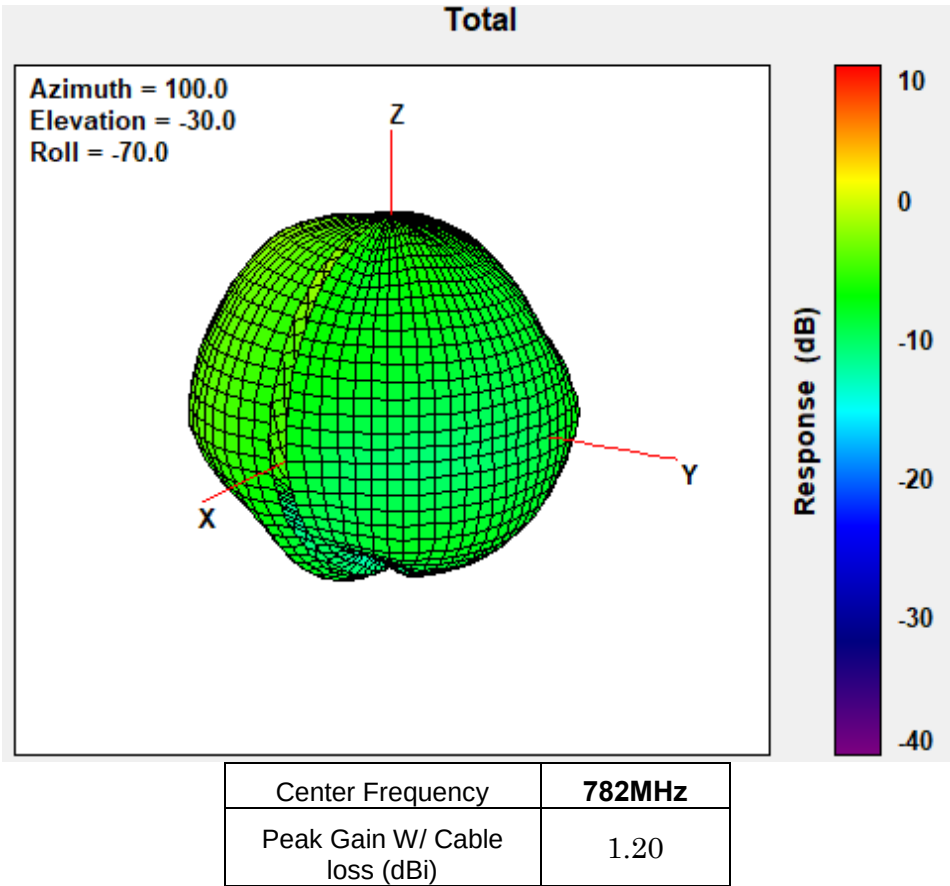


787MHz

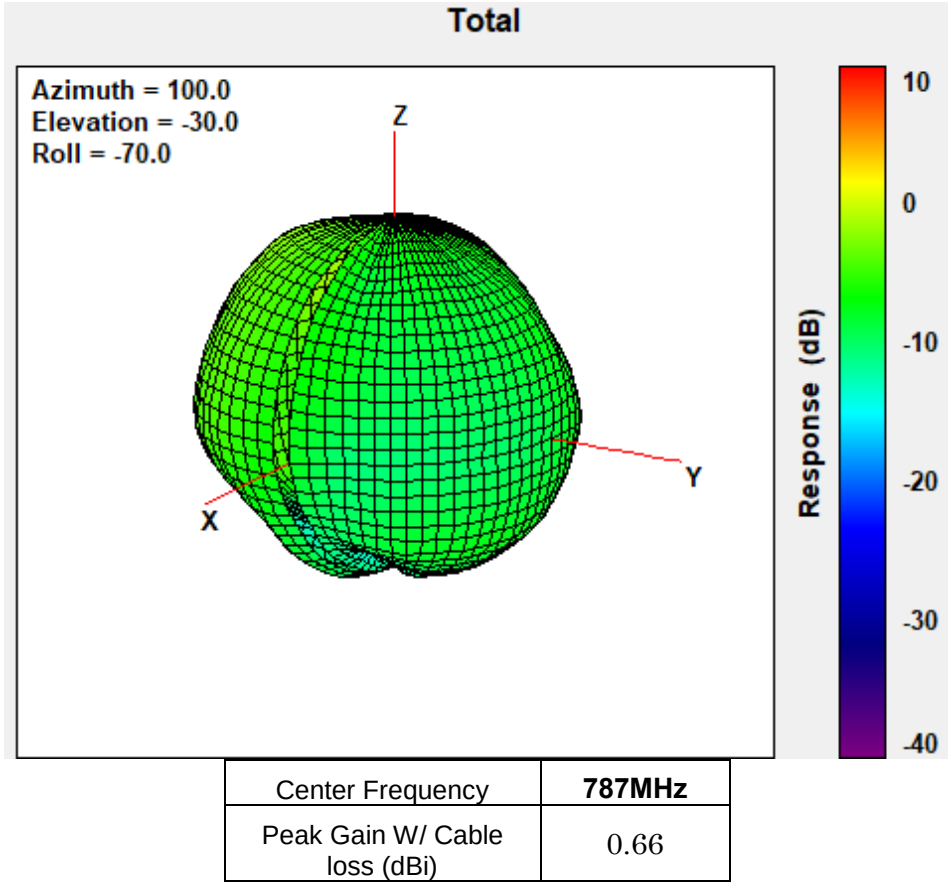


788MHz

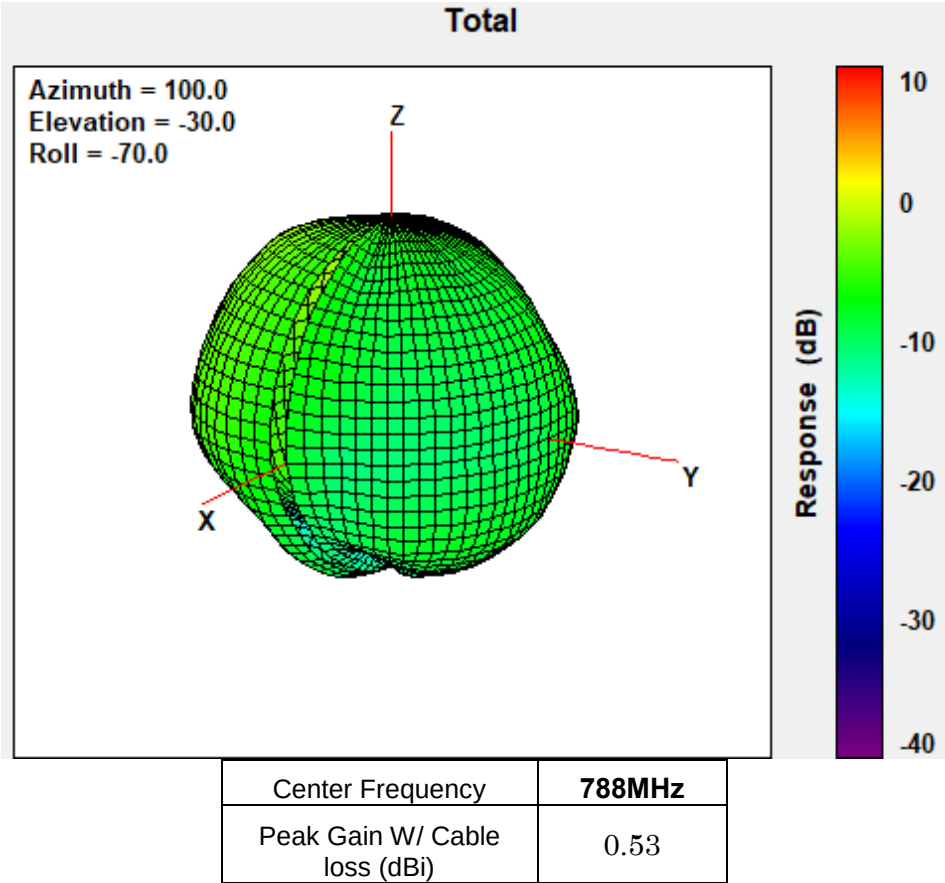


793MHz

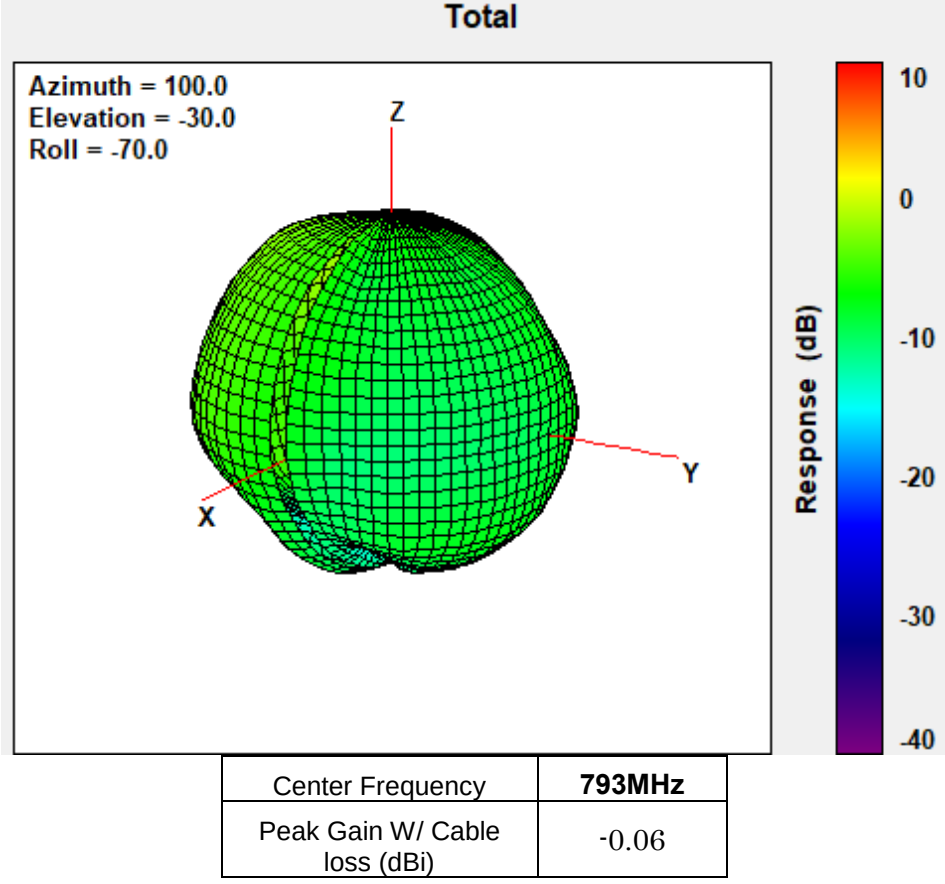


798MHz

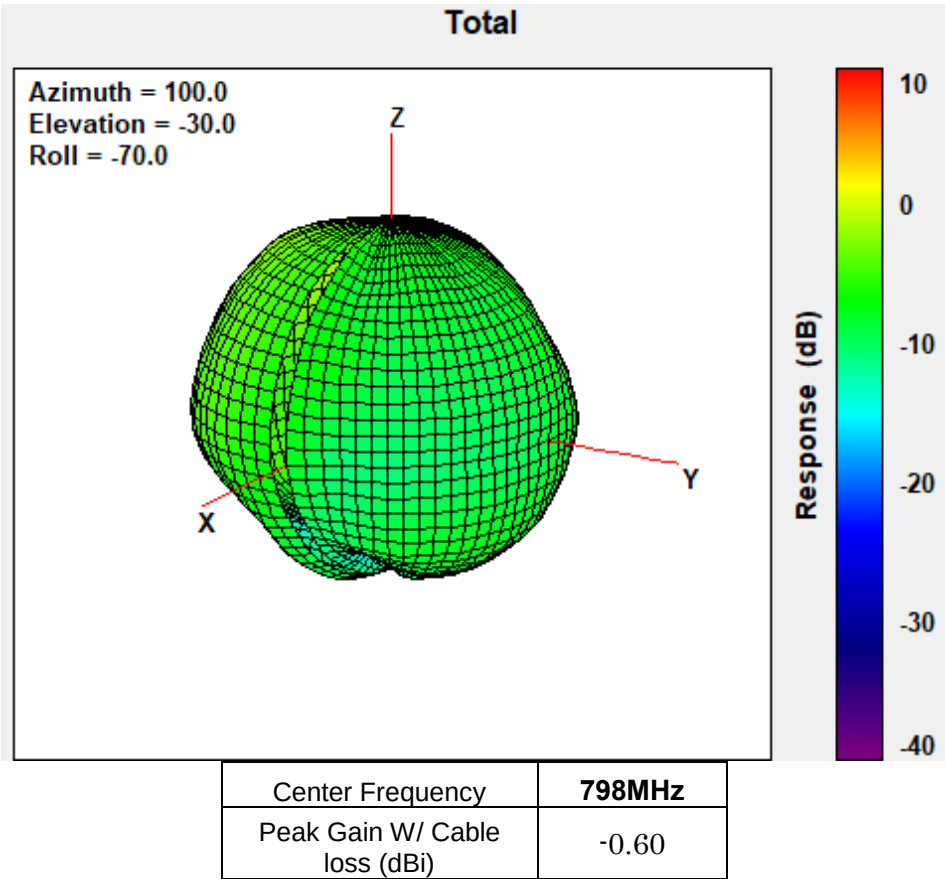


814MHz


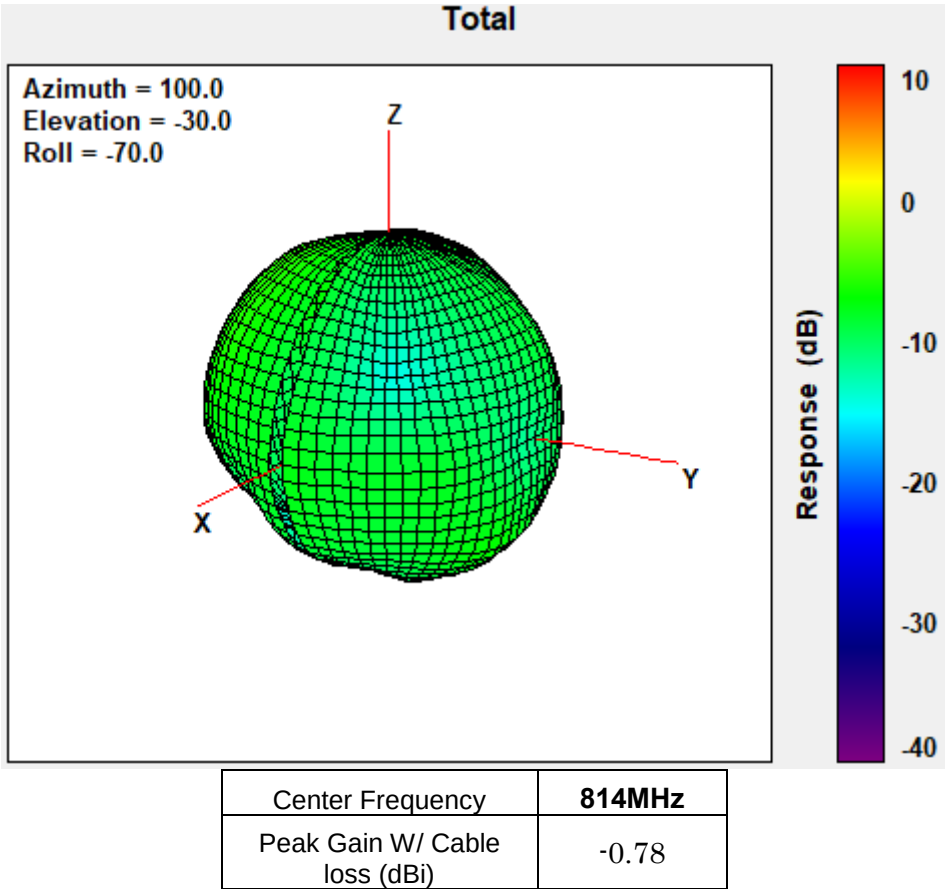


815MHz

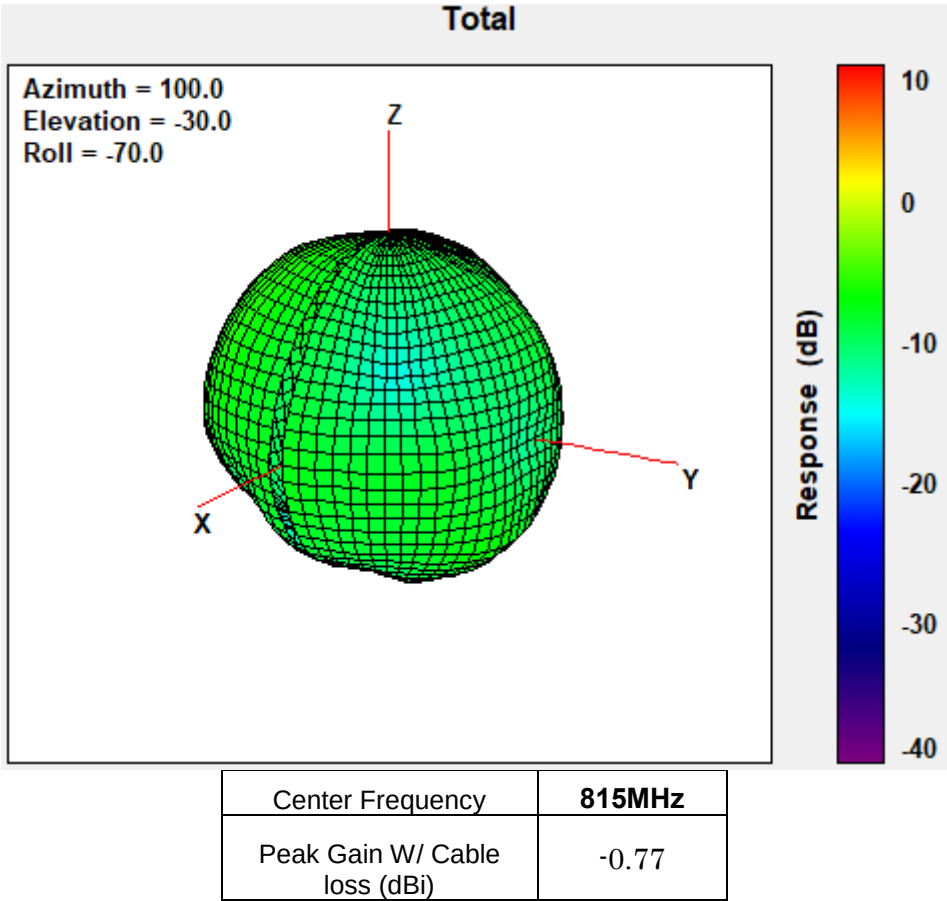


**822.5MHz
Total**

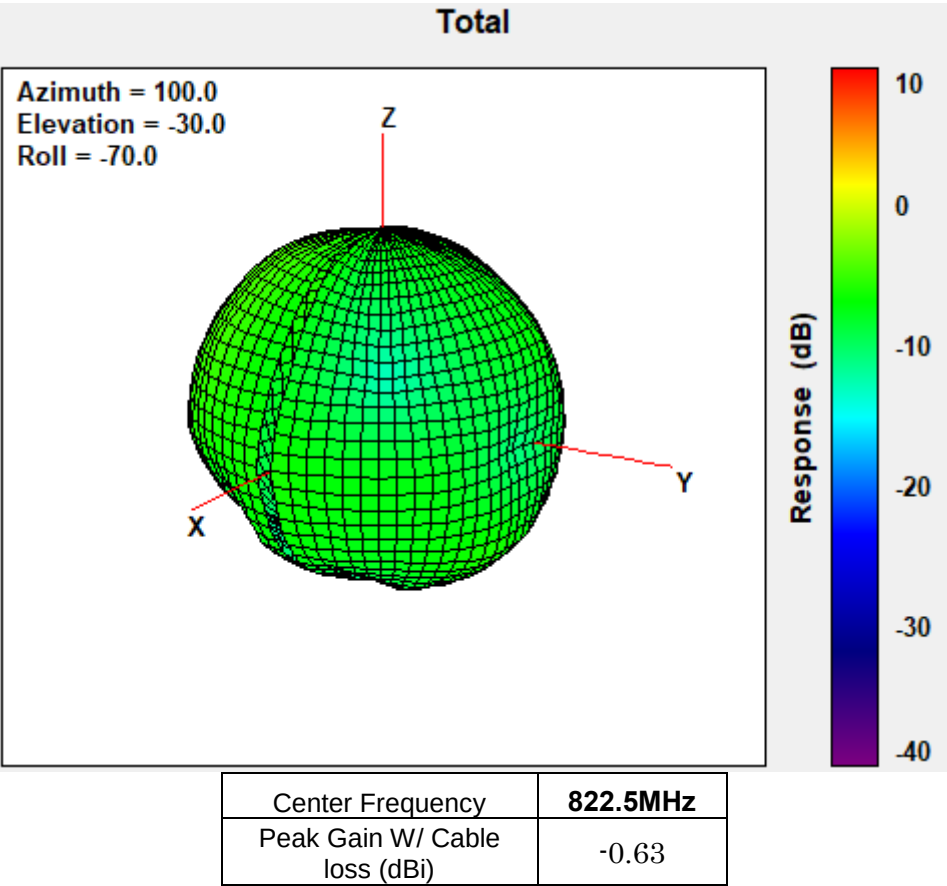


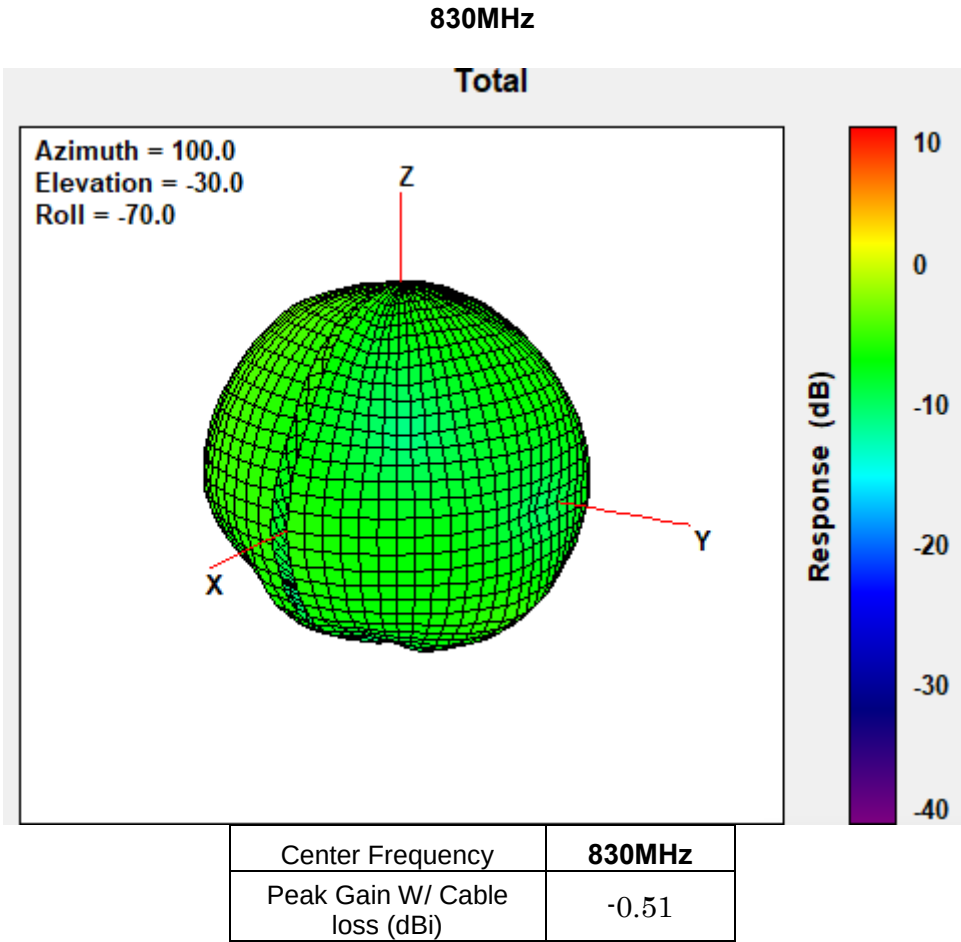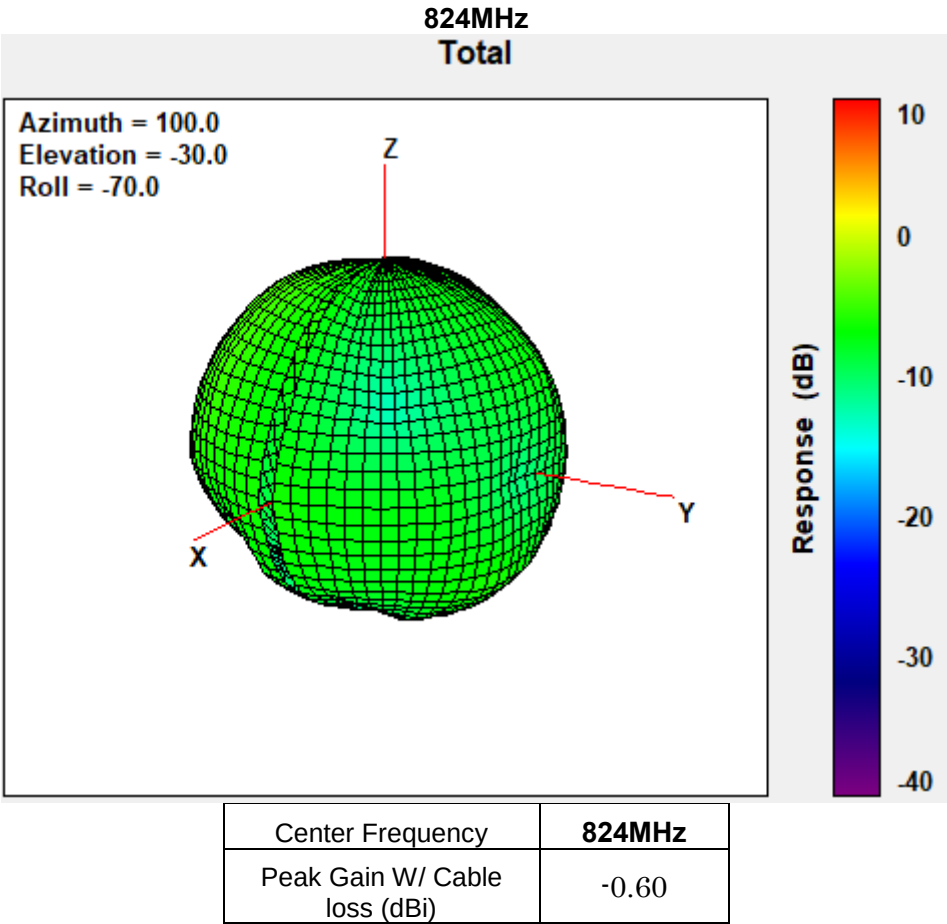


831.5MHz

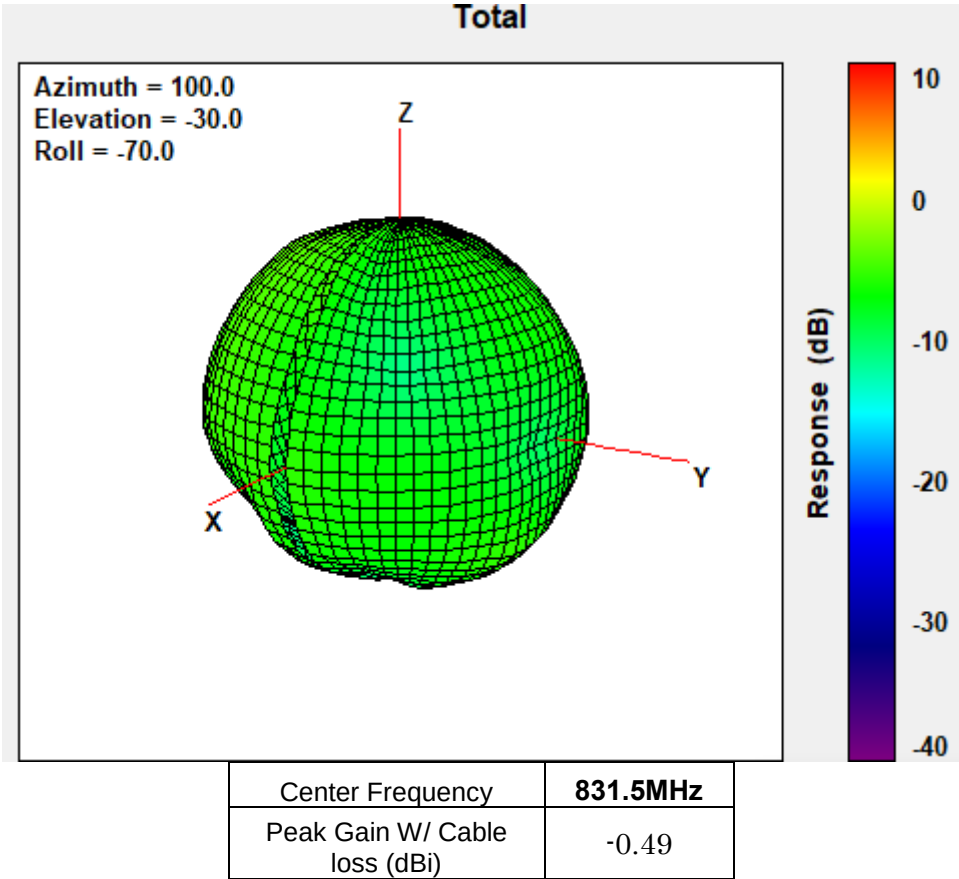


832MHz

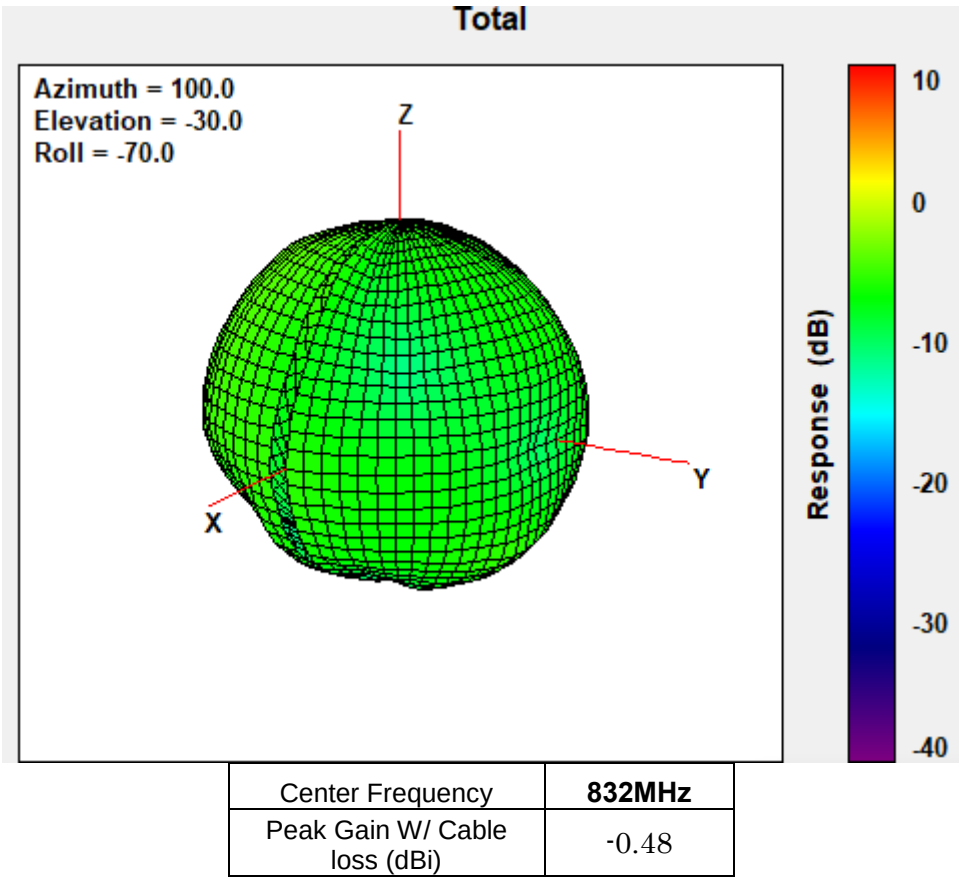


836.5MHz

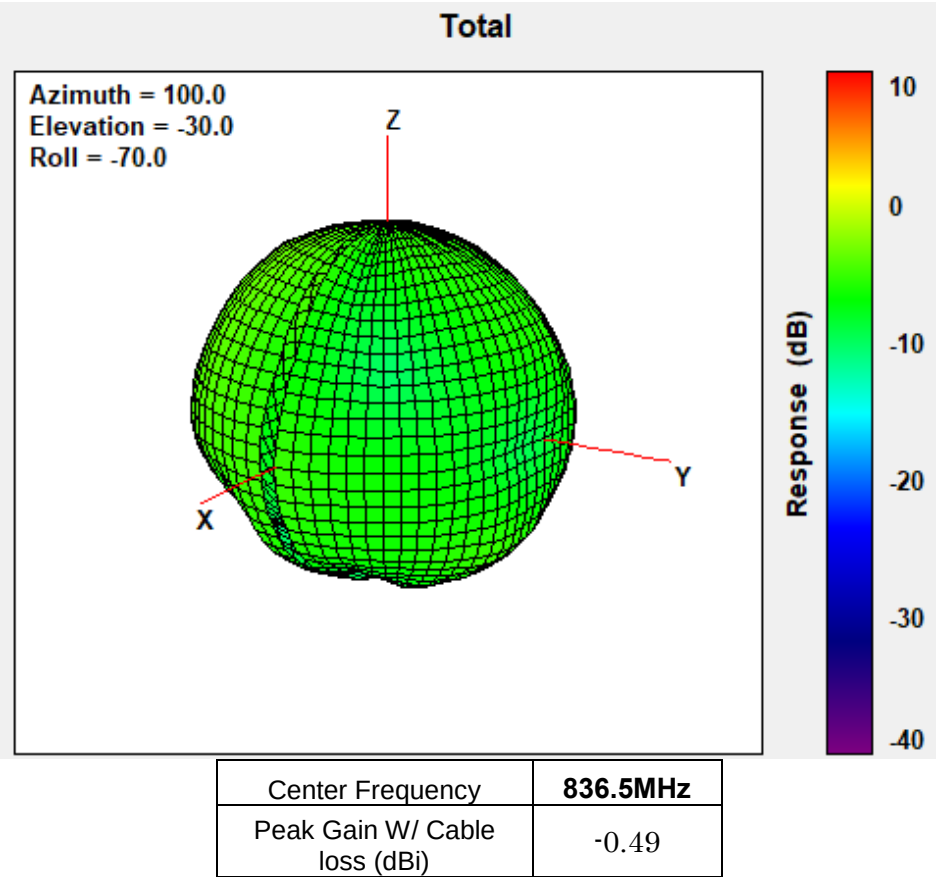


837.5MHz

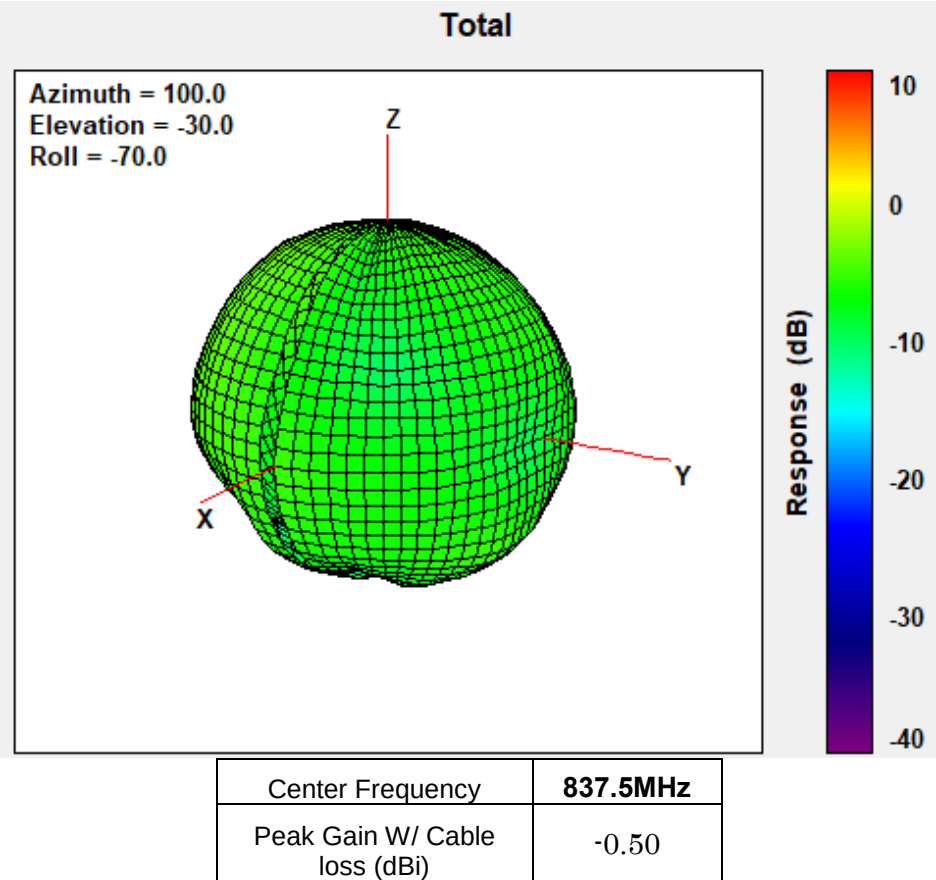


845MHz

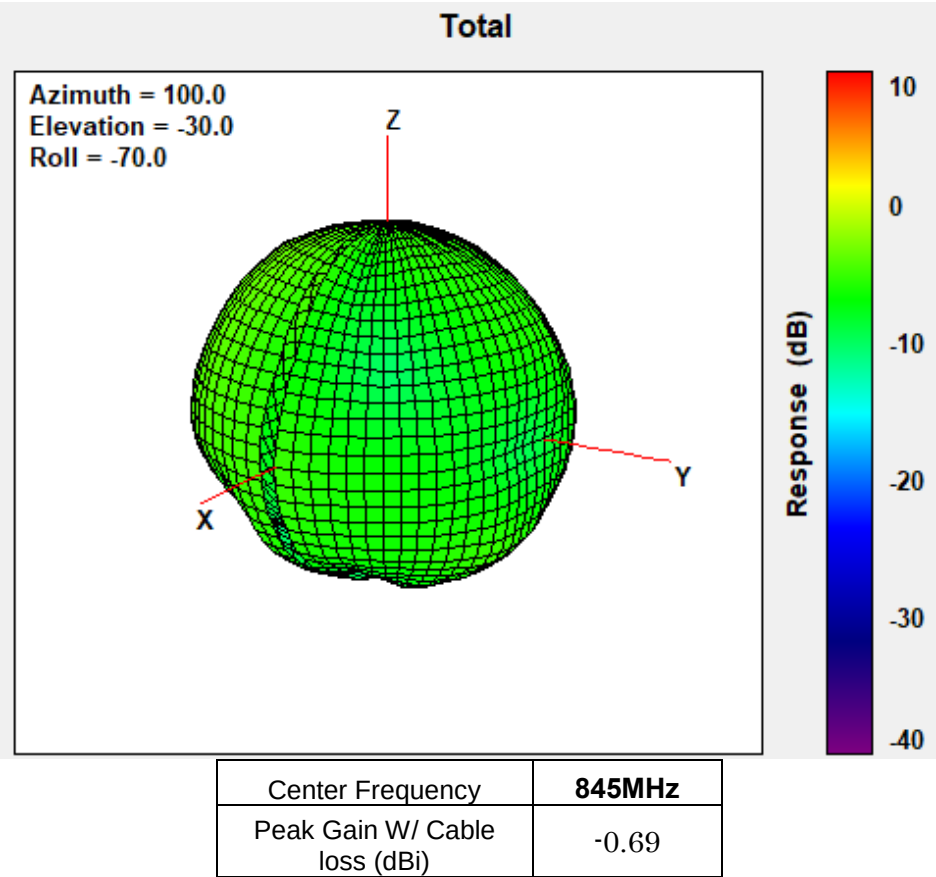


847MHz

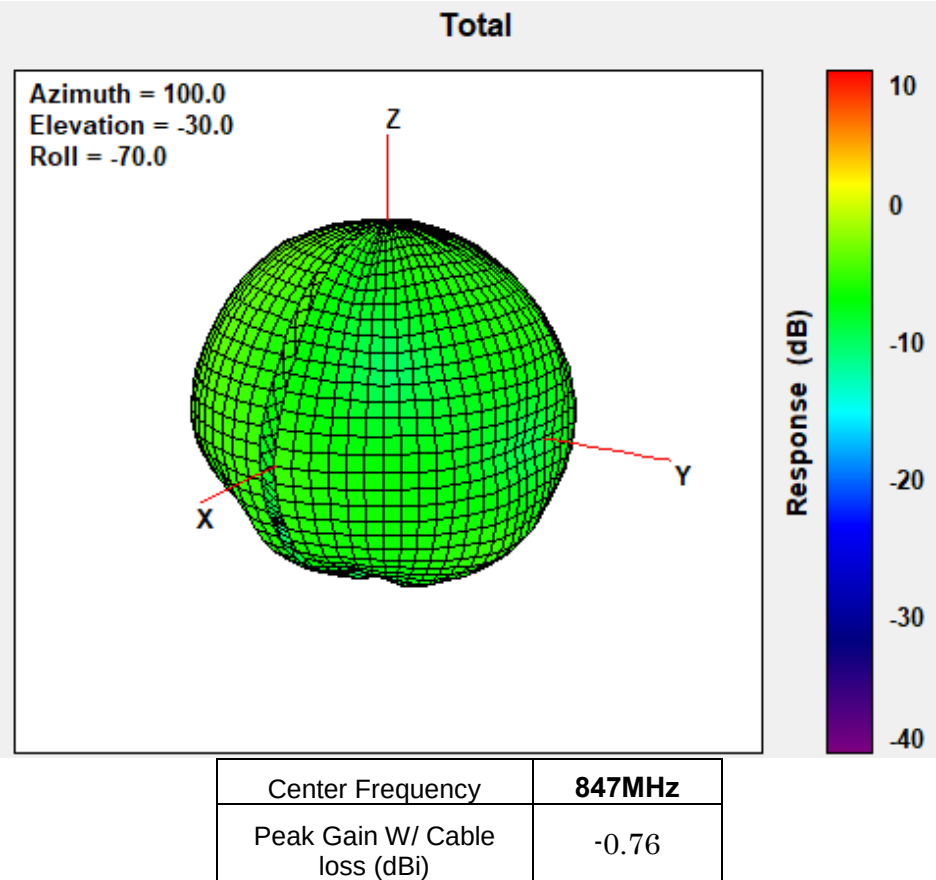


849MHz

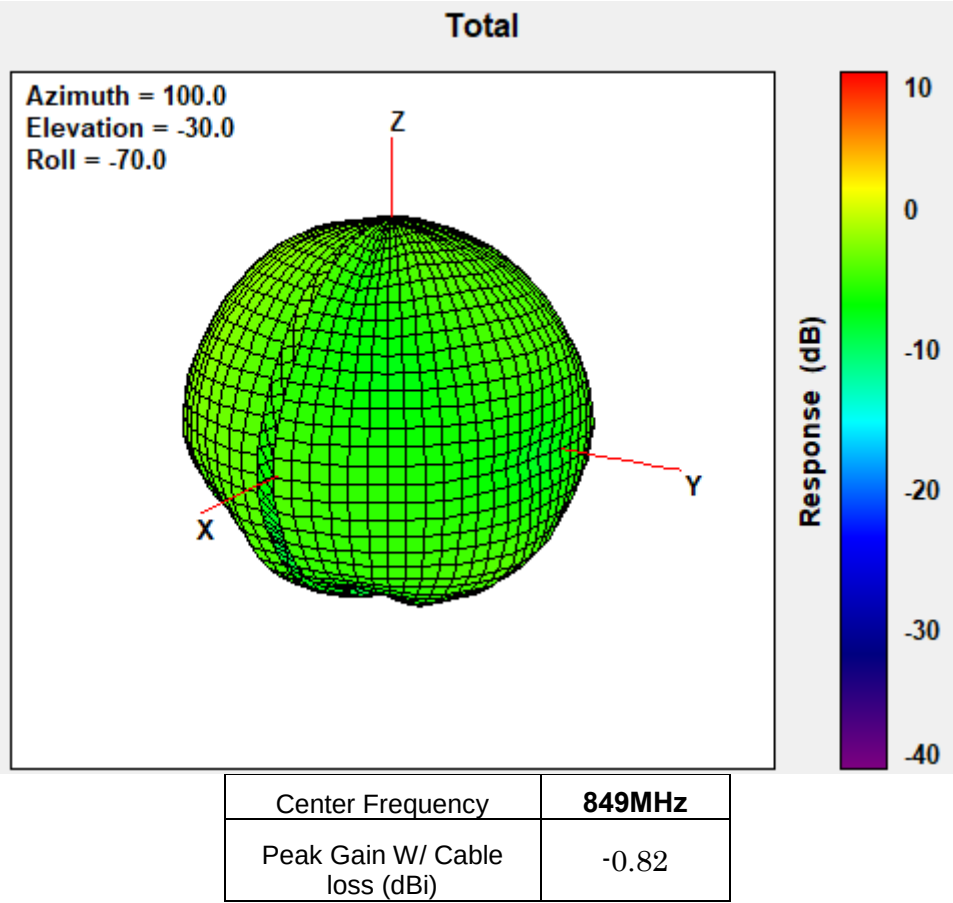


862MHz

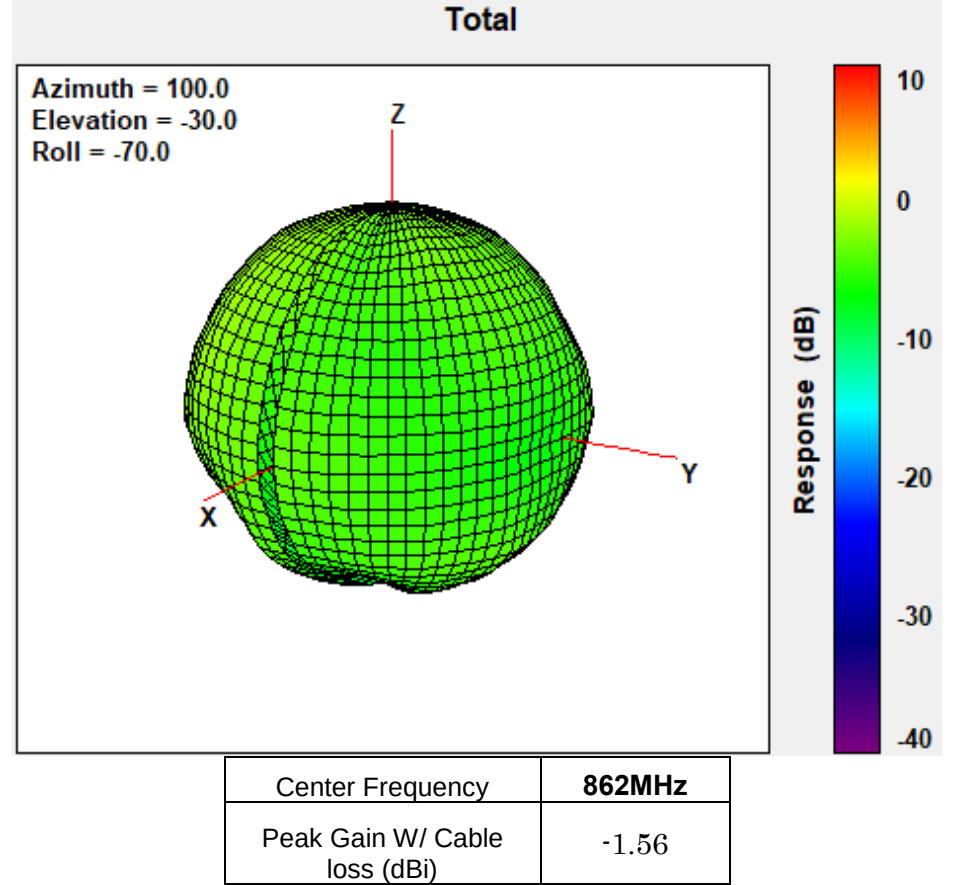


880MHz

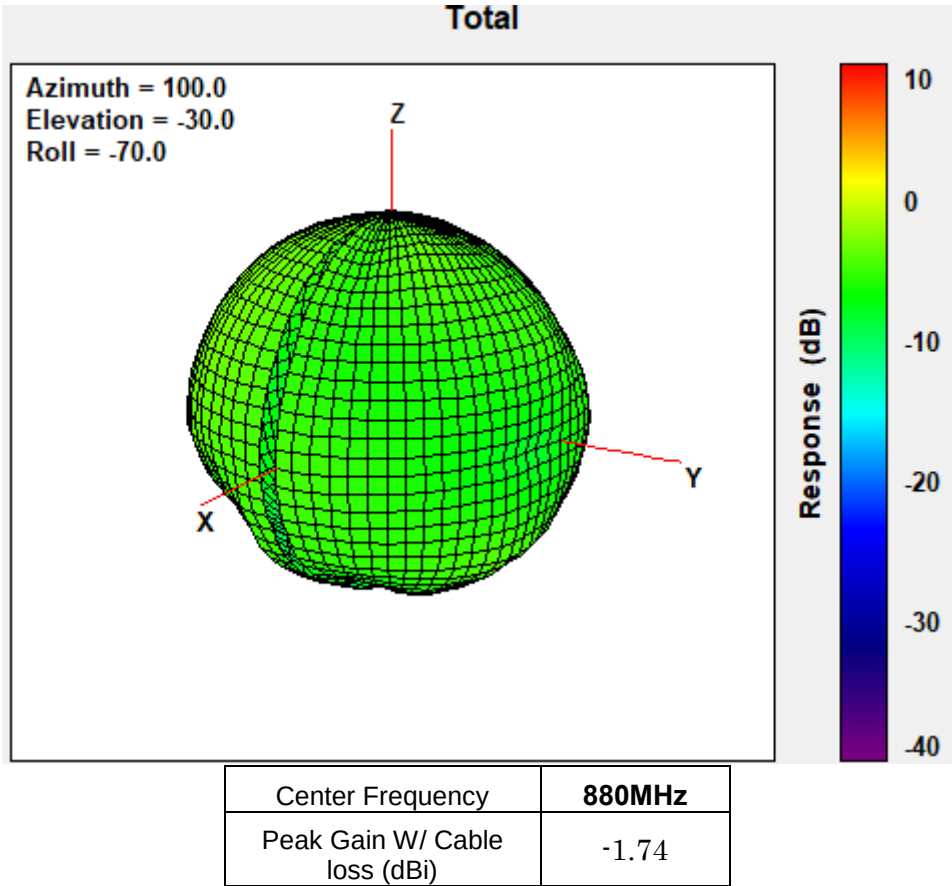


897.5MHz

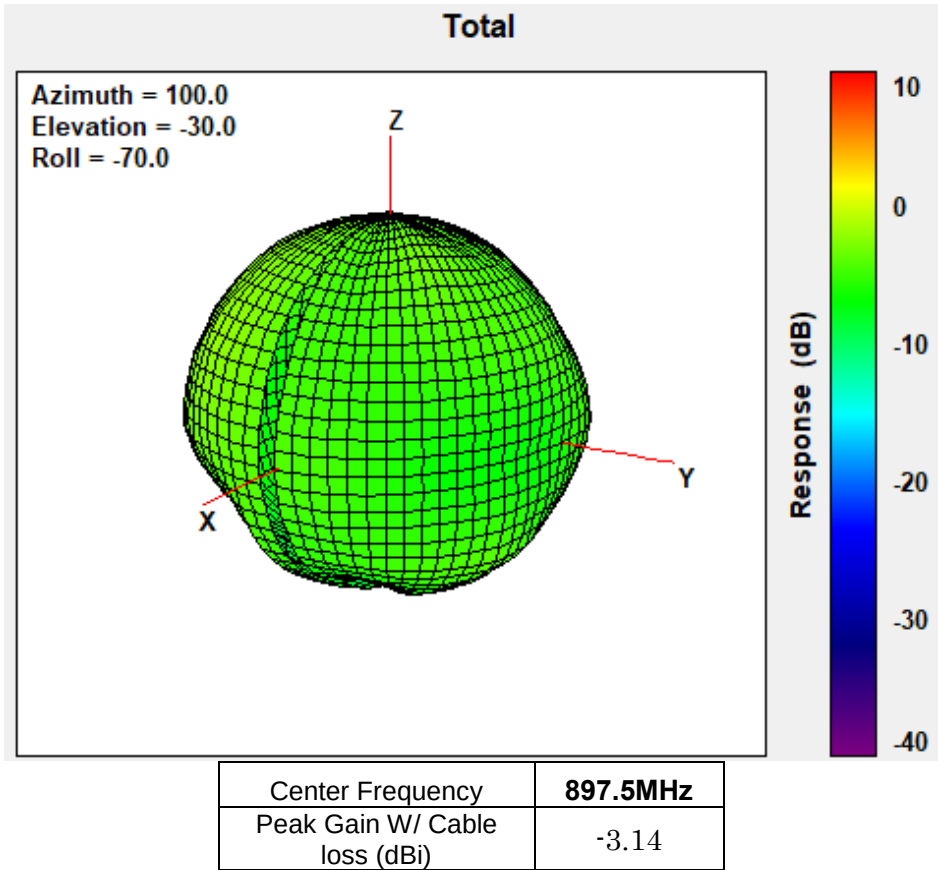


915MHz

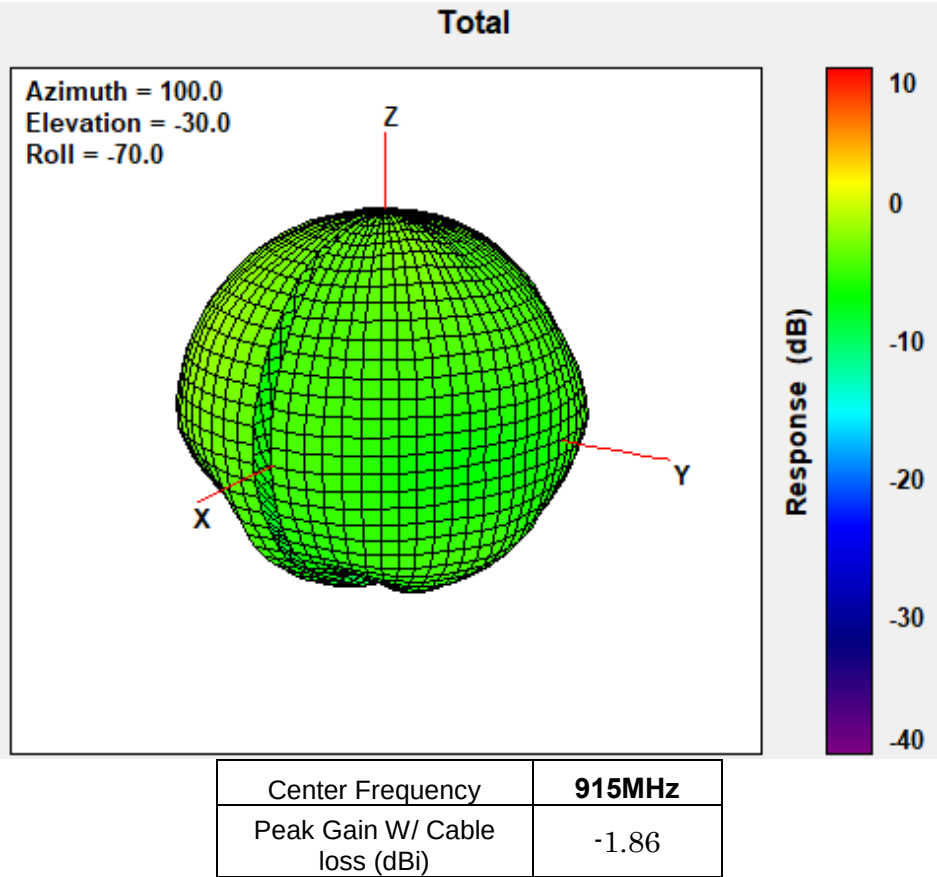


1695 MHz

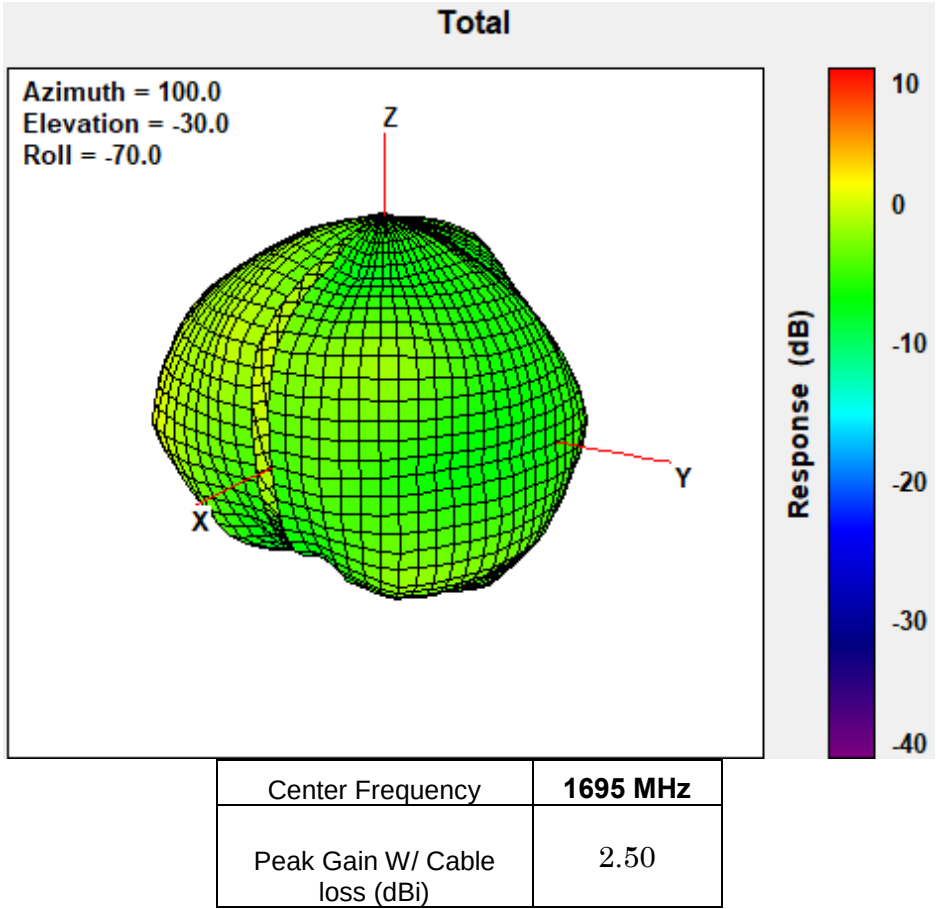


1702.5 MHz

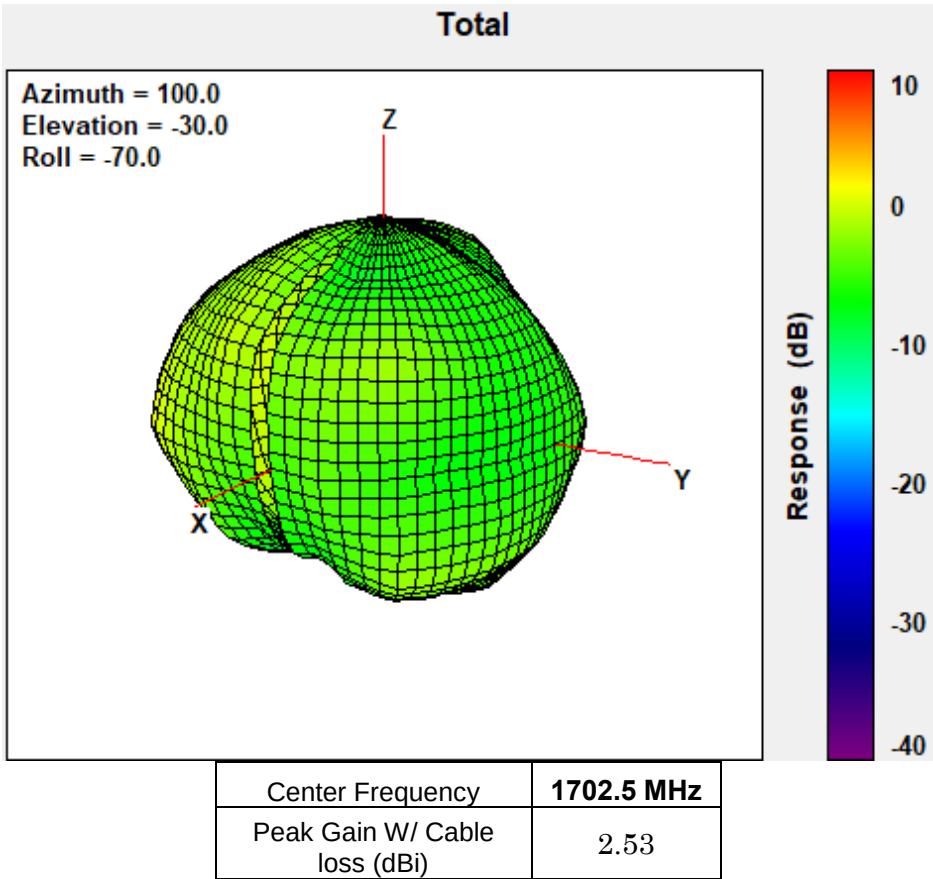


1710 MHz

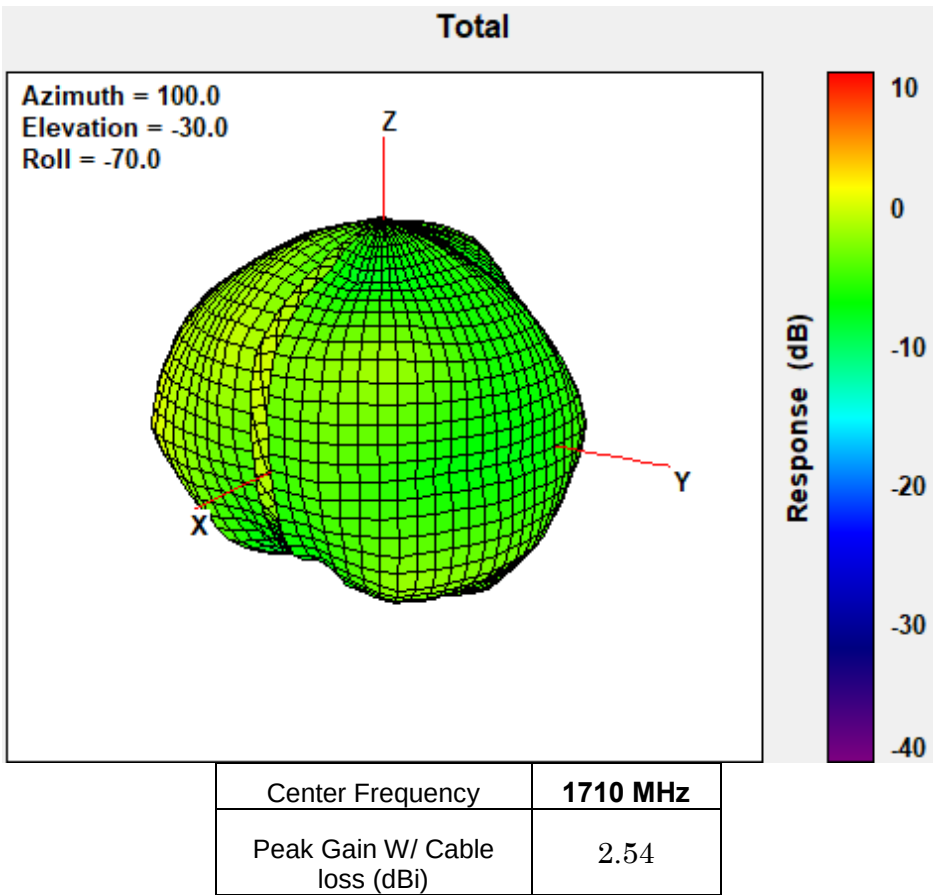


1732.5 MHz

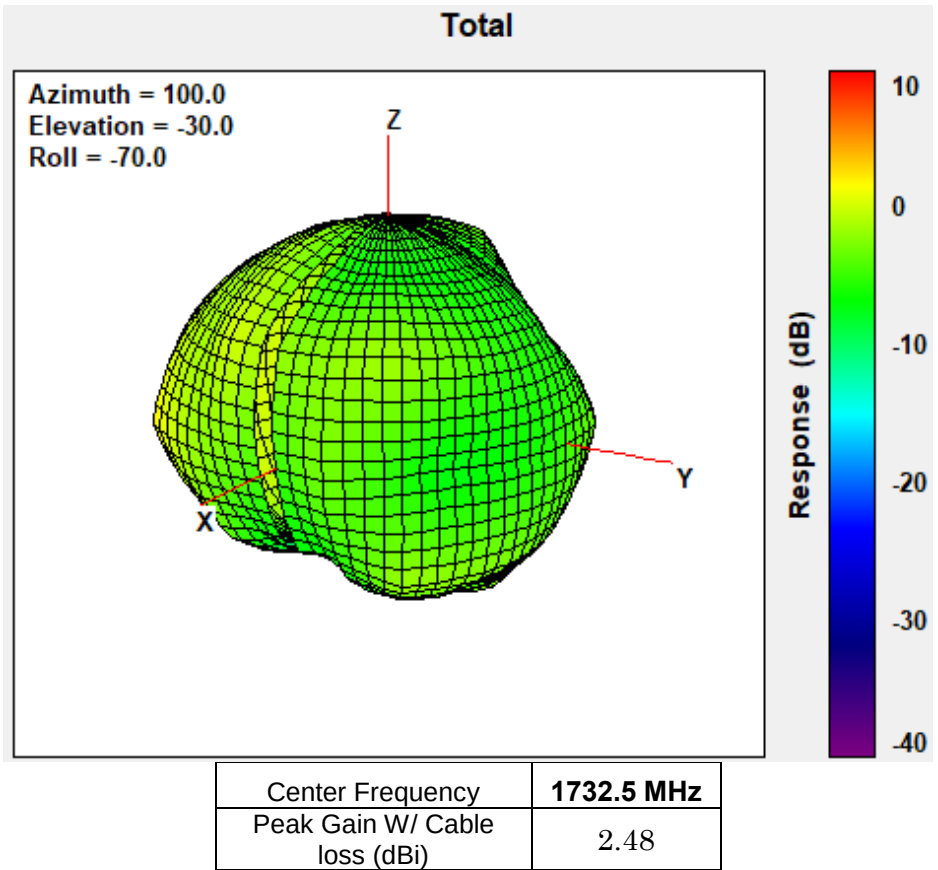


1745 MHz

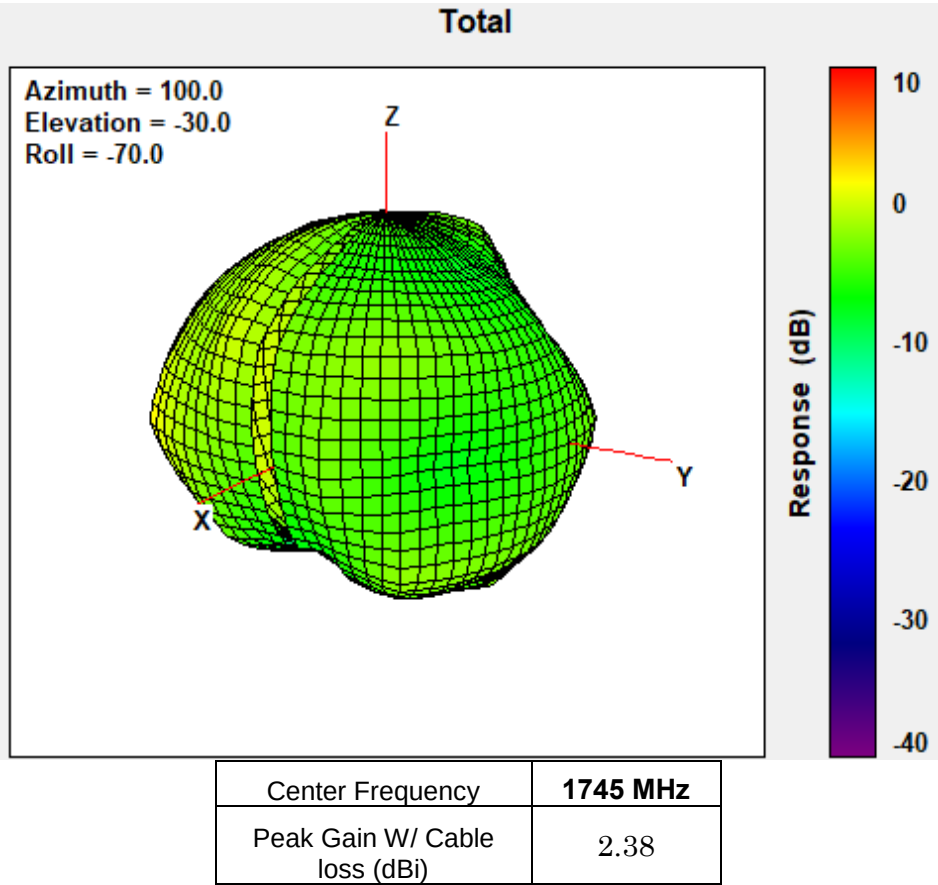


1747.5 MHz

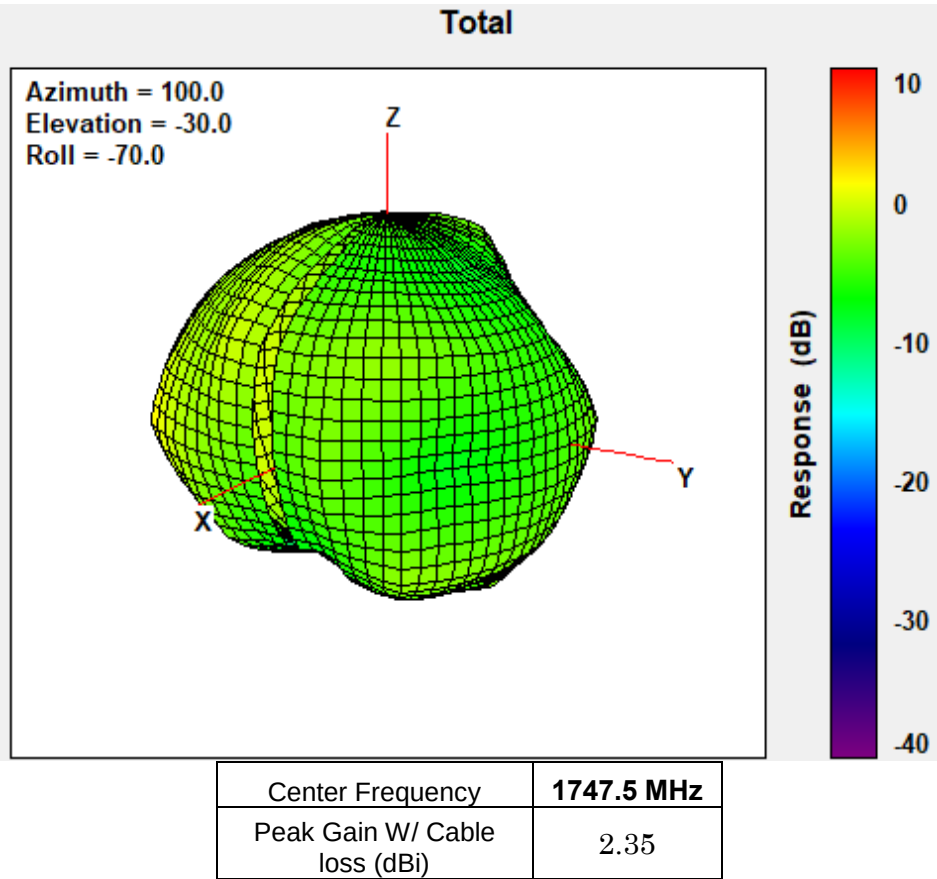


1755 MHz

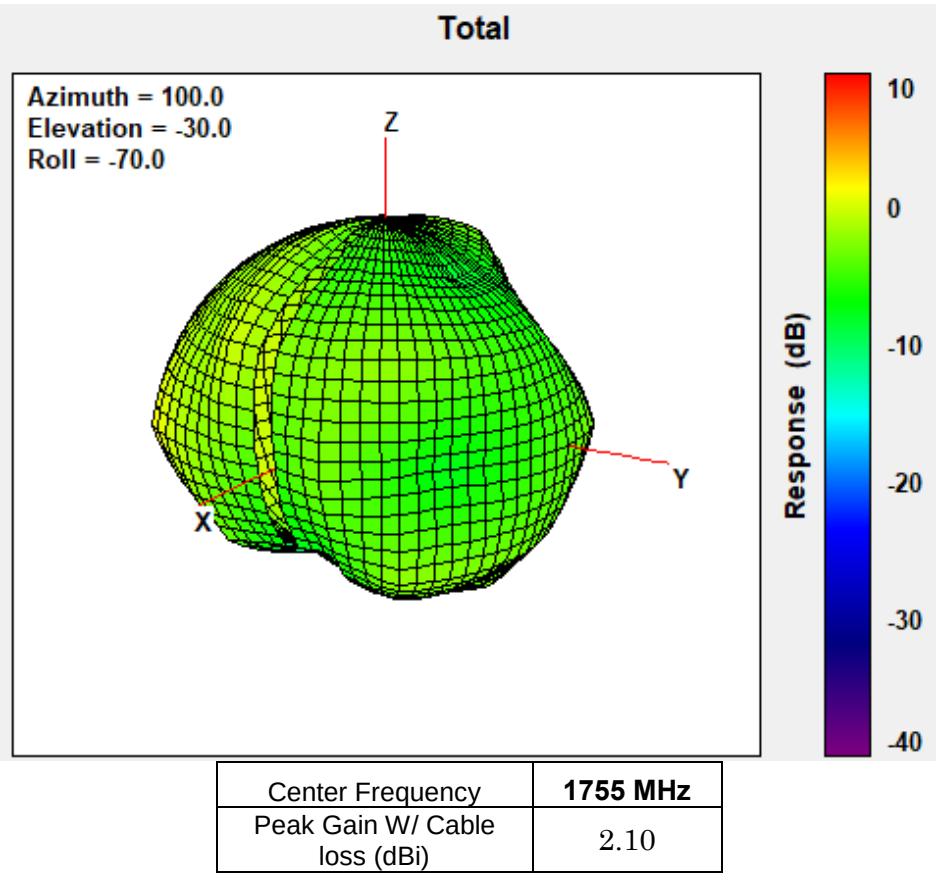


1780 MHz

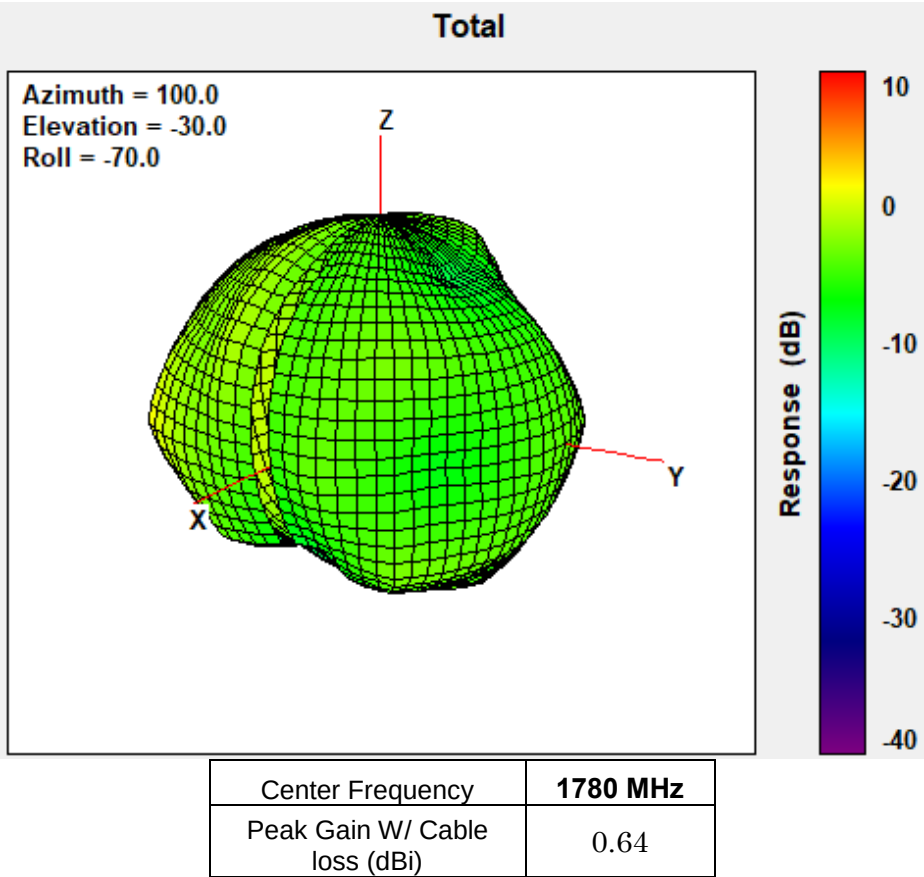


1785 MHz

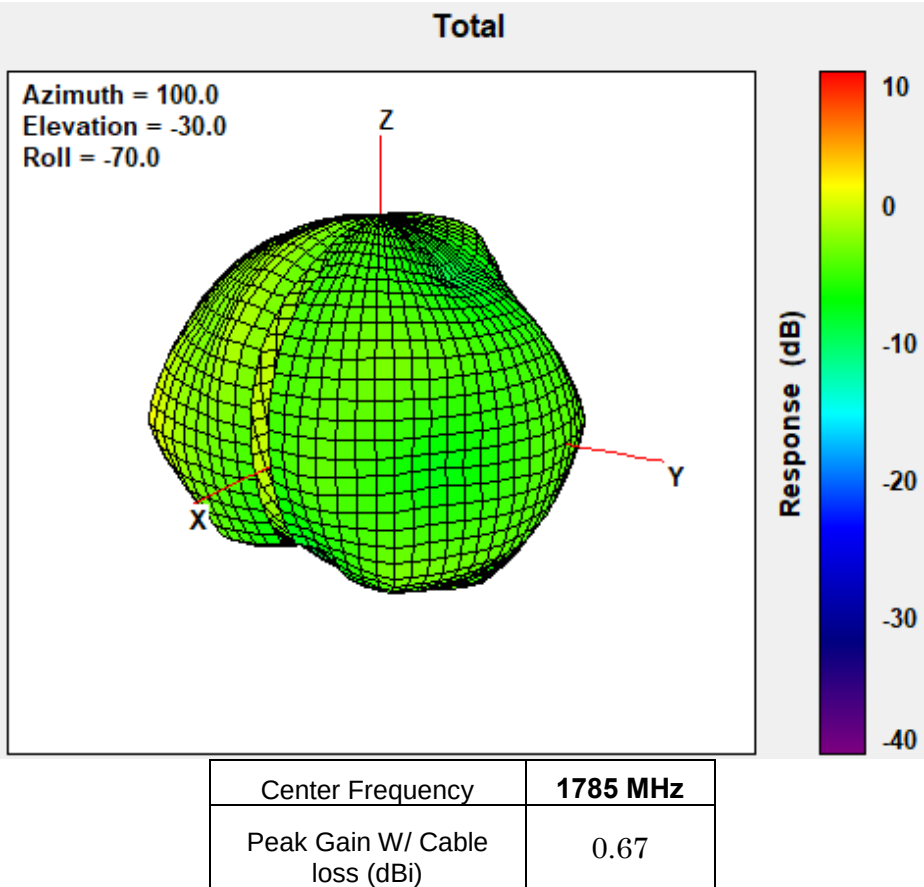


1850 MHz

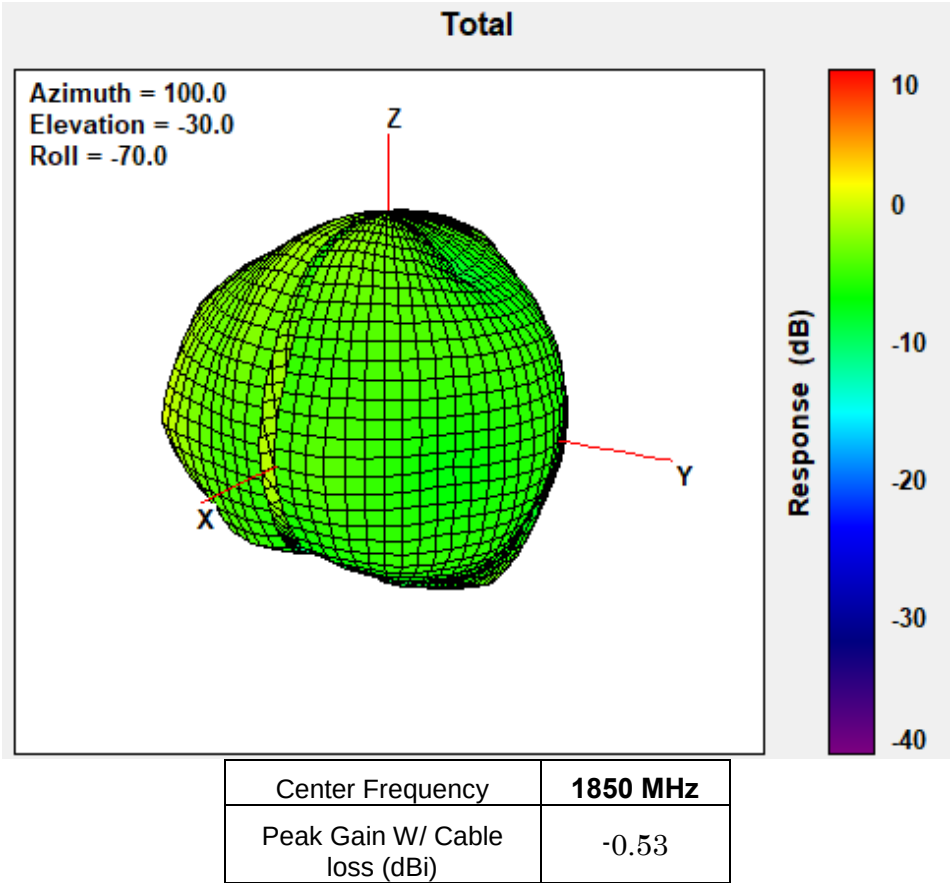


1880 MHz

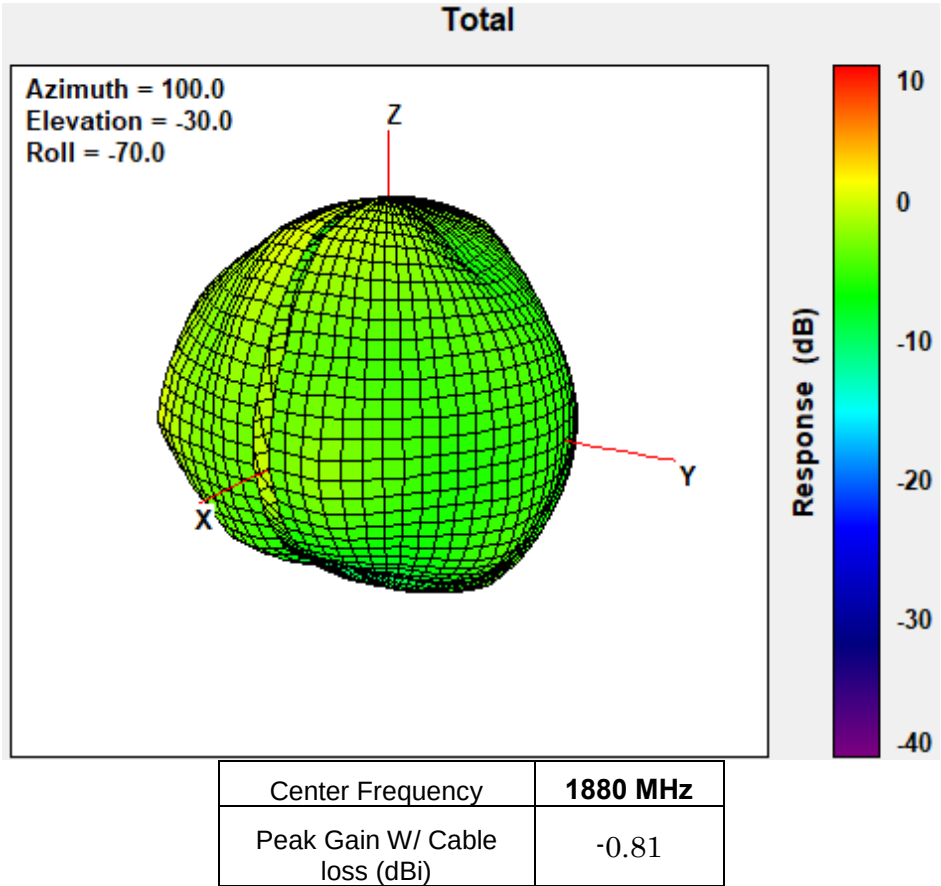


1882.5 MHz

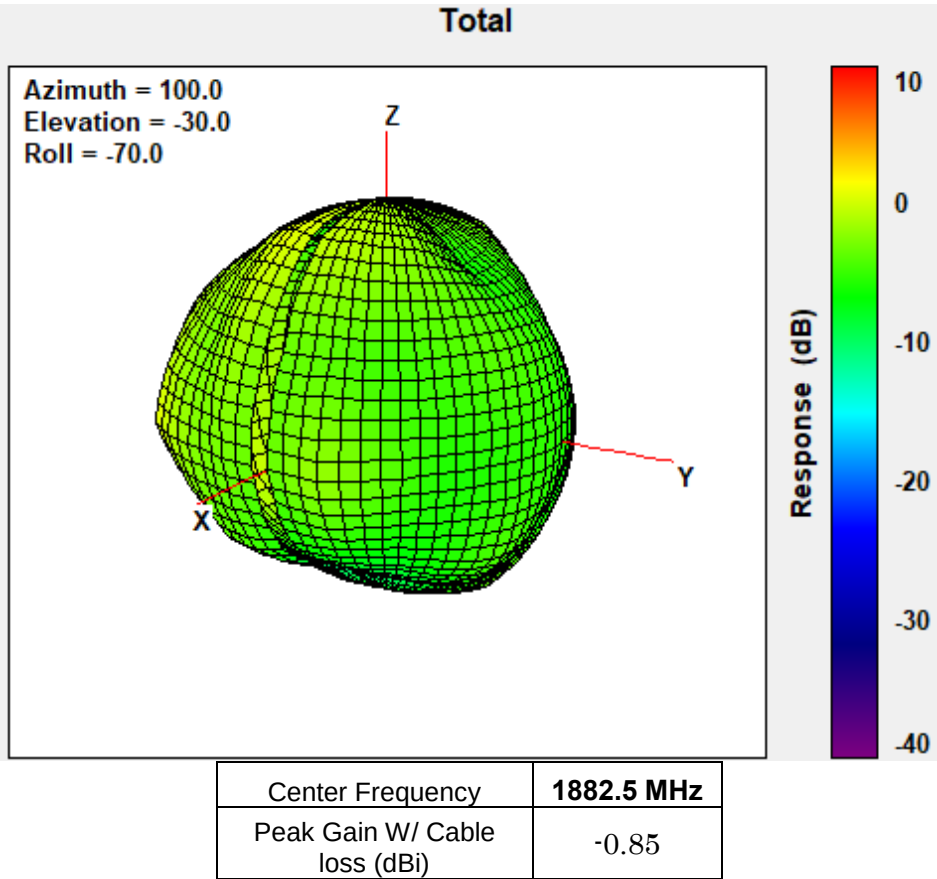


1900MHz

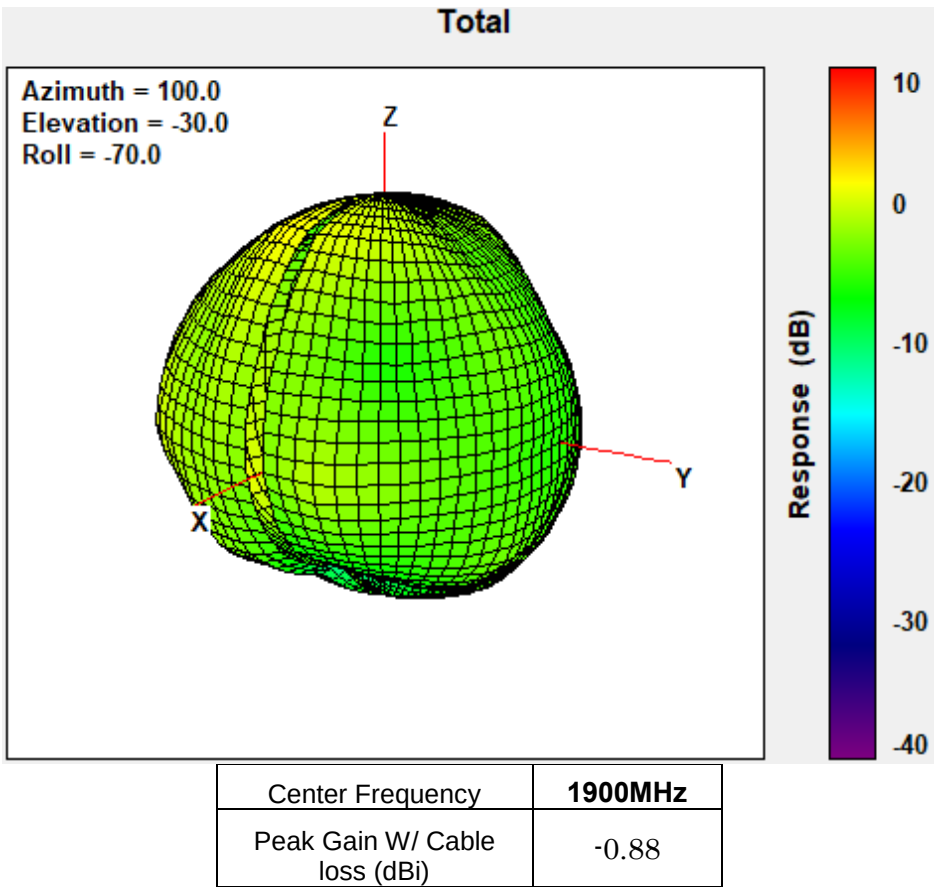


1910MHz

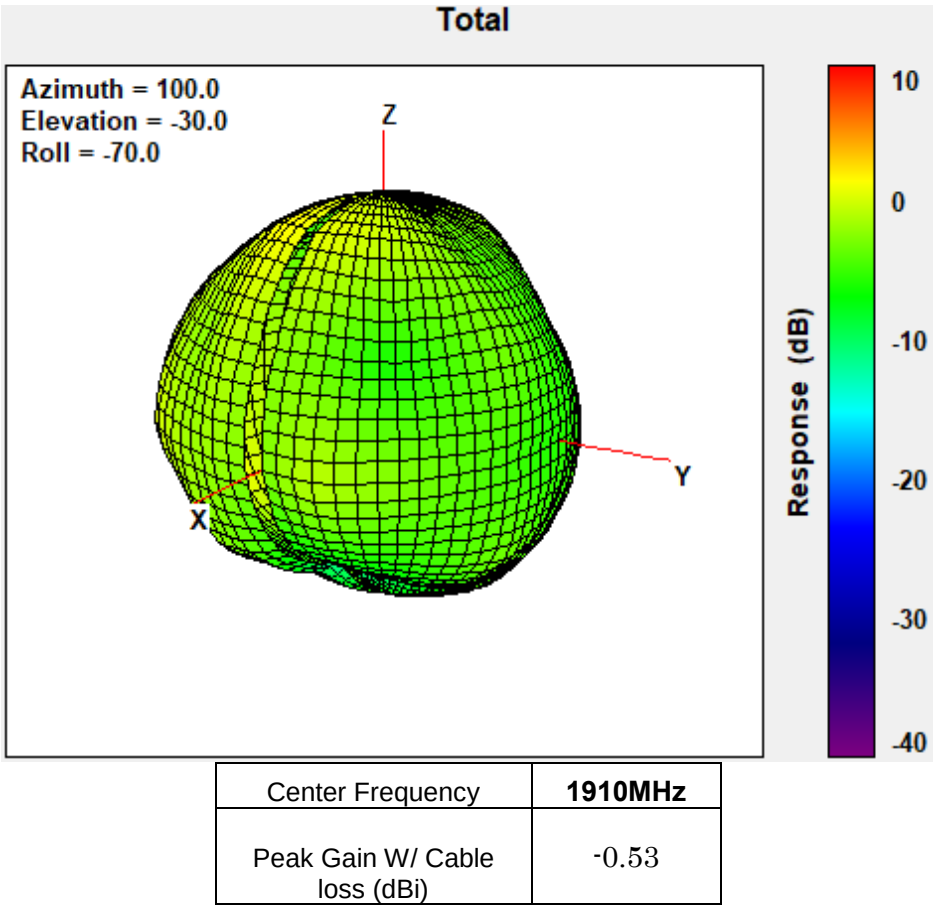


1915MHz

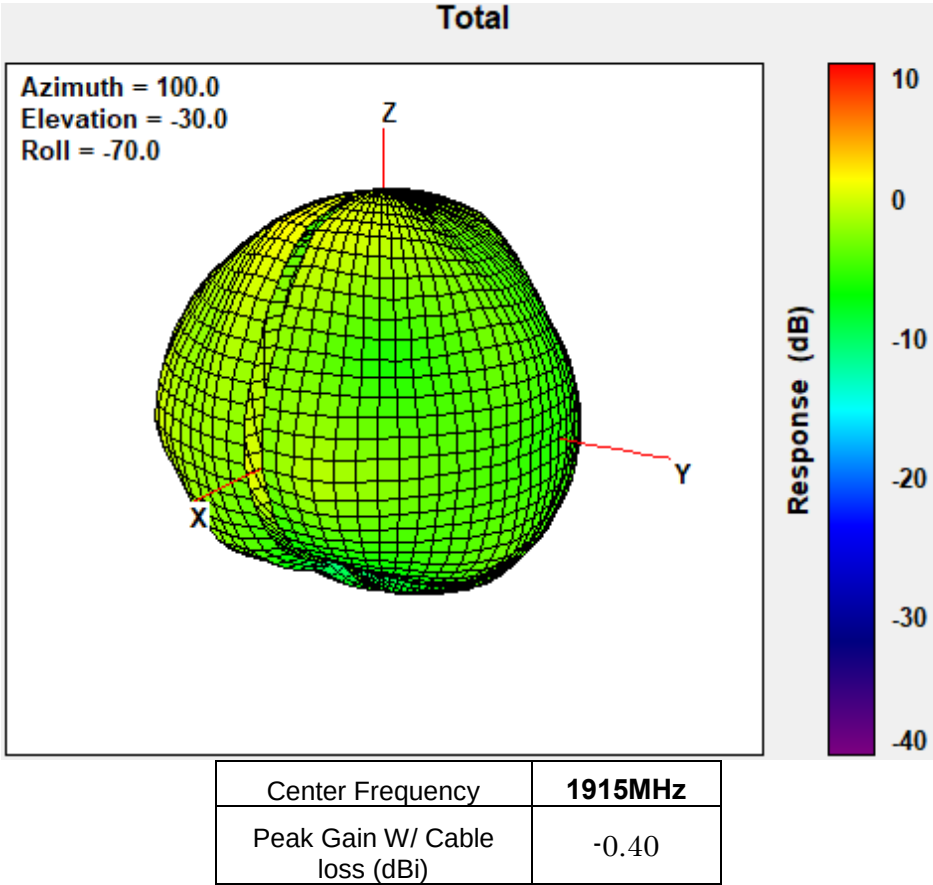


1920MHz

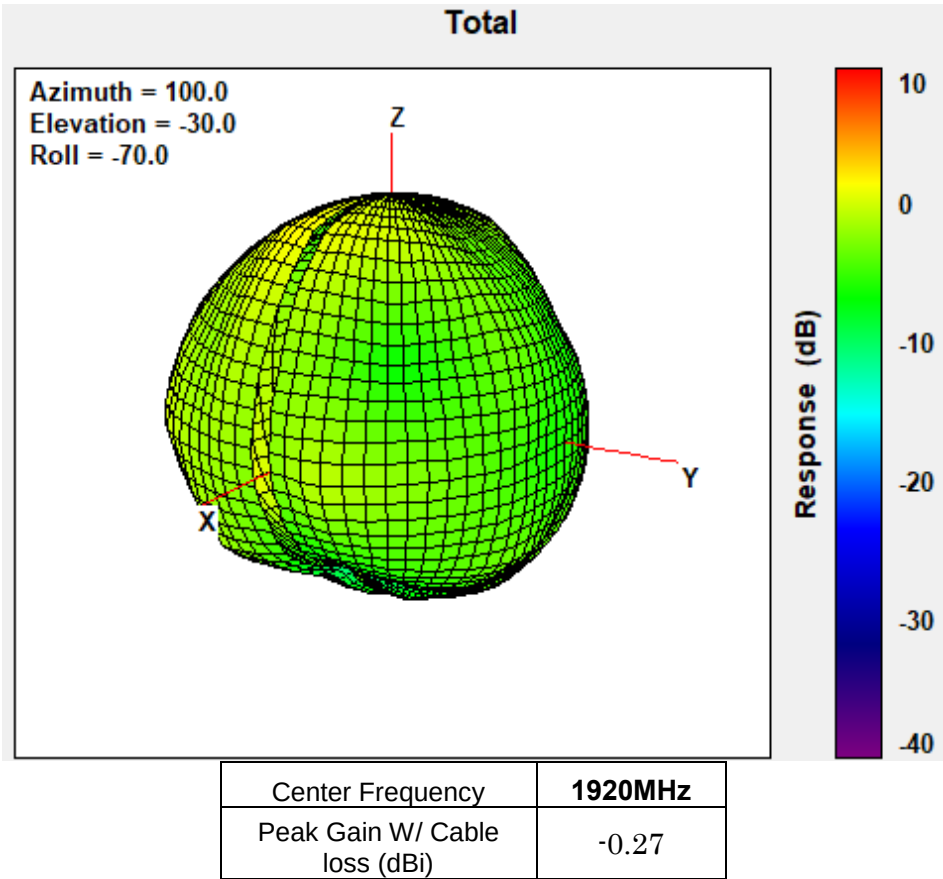


1950MHz

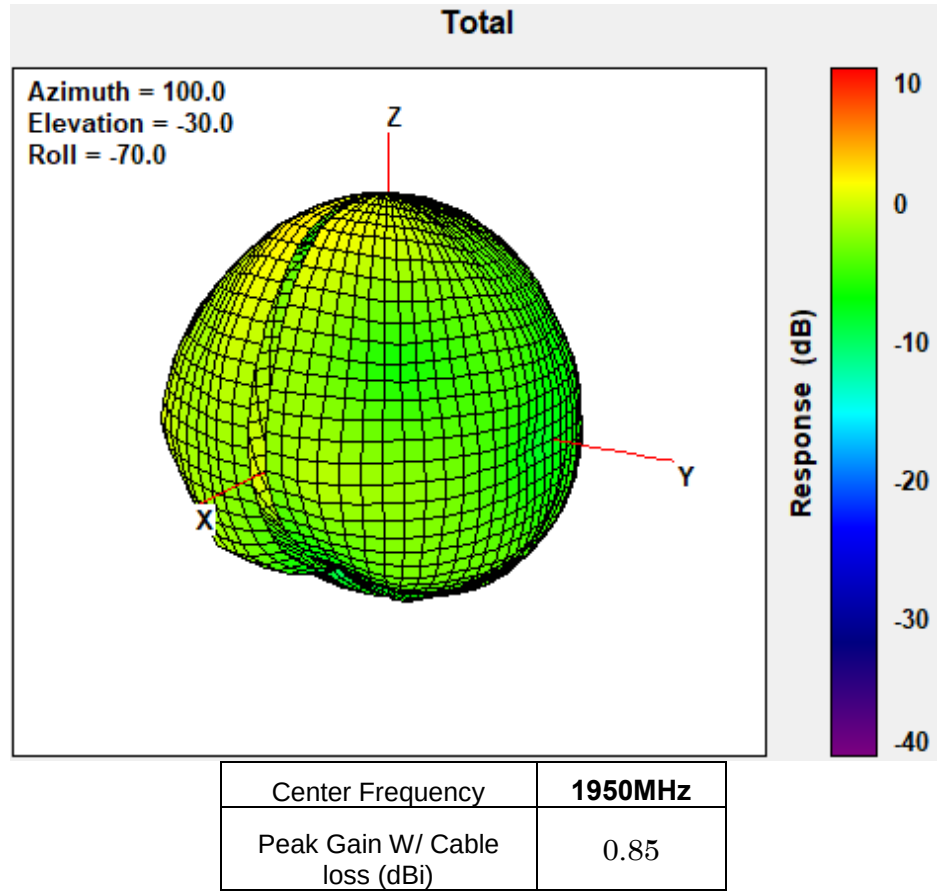


1980MHz

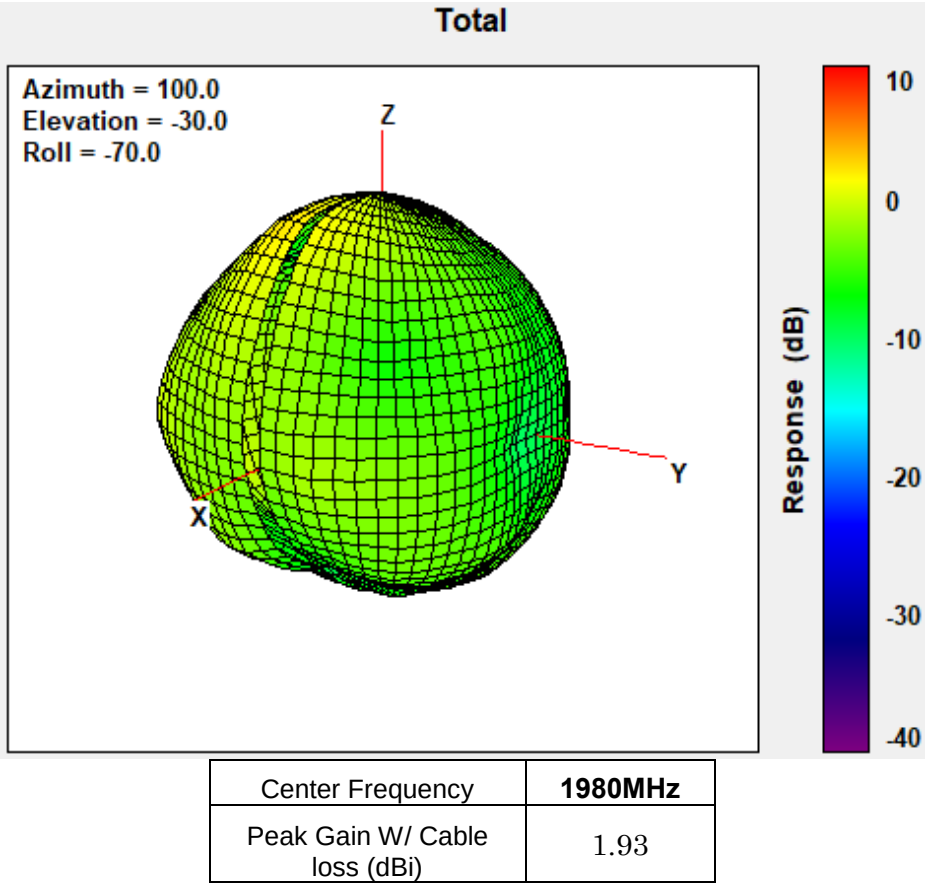


2010MHz

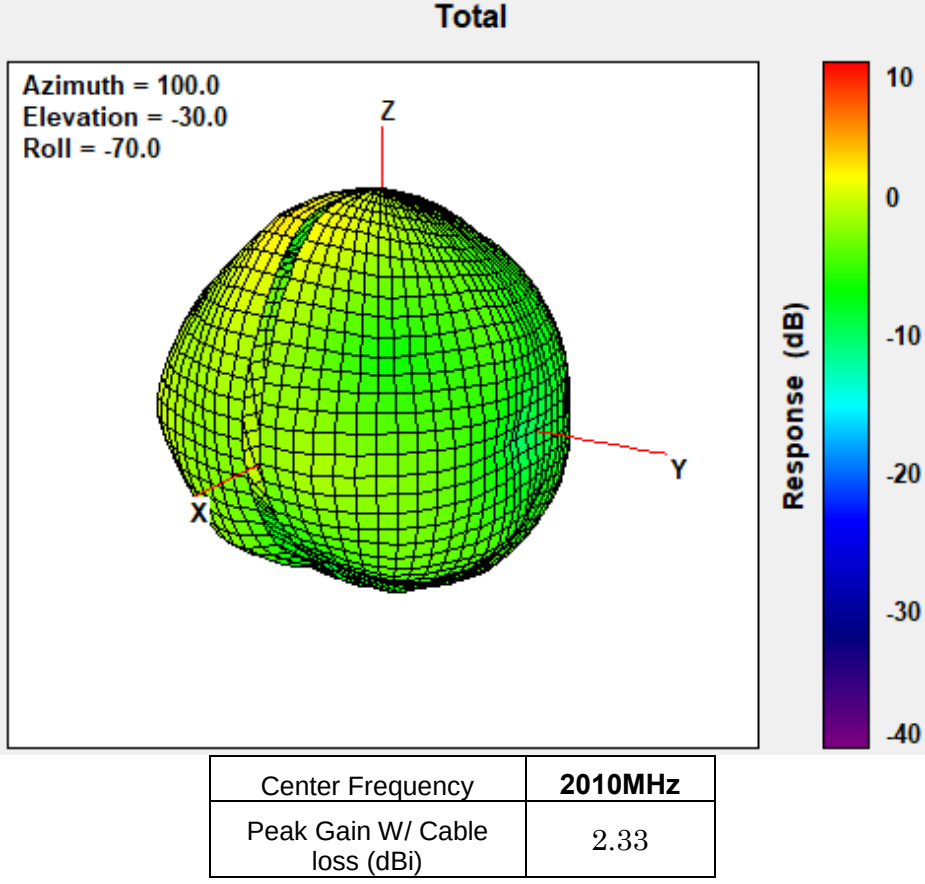


2017.5MHz

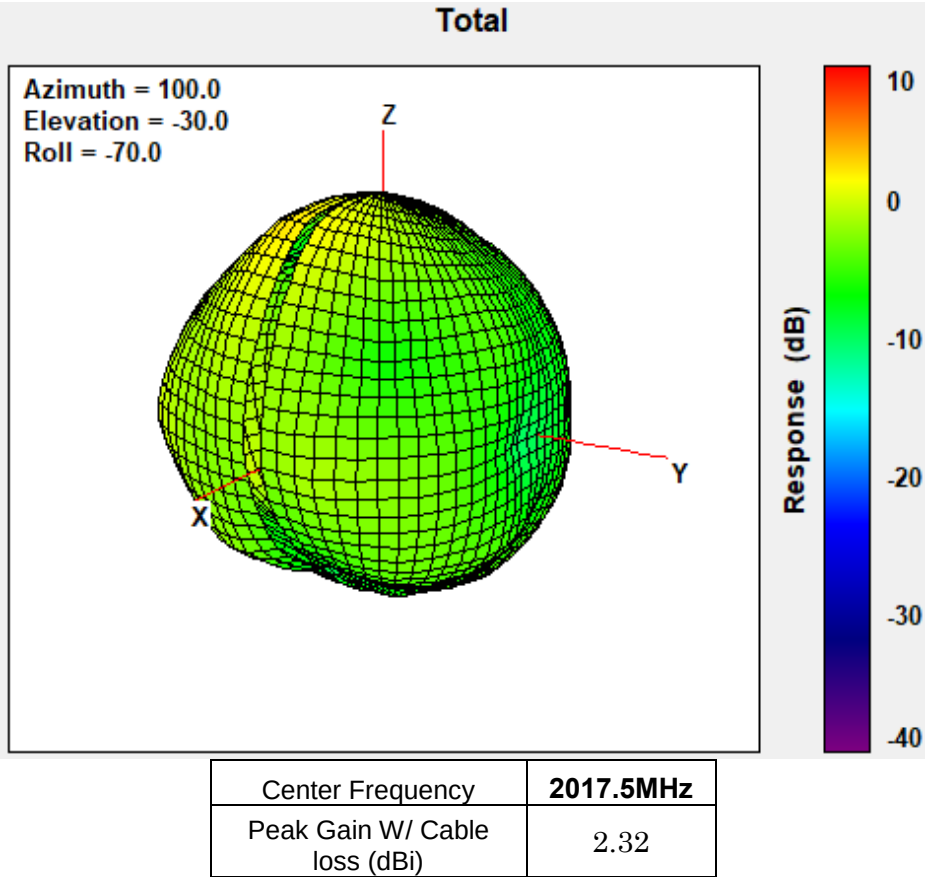


2025MHz

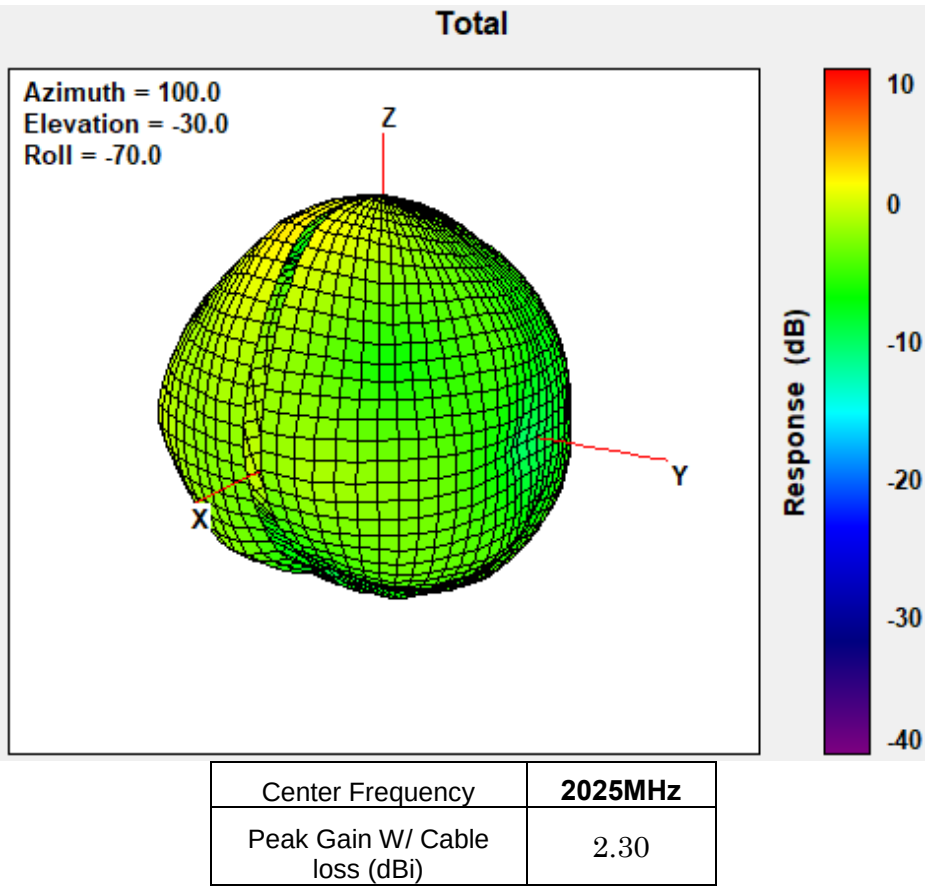


2300MHz

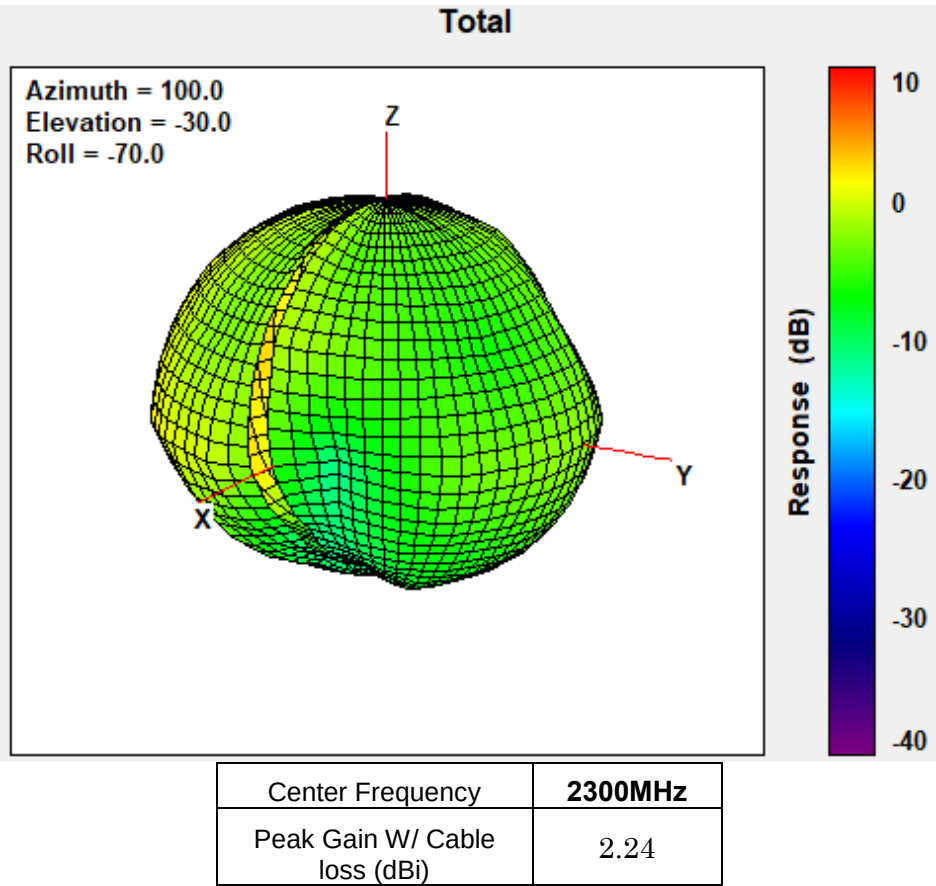


2305MHz

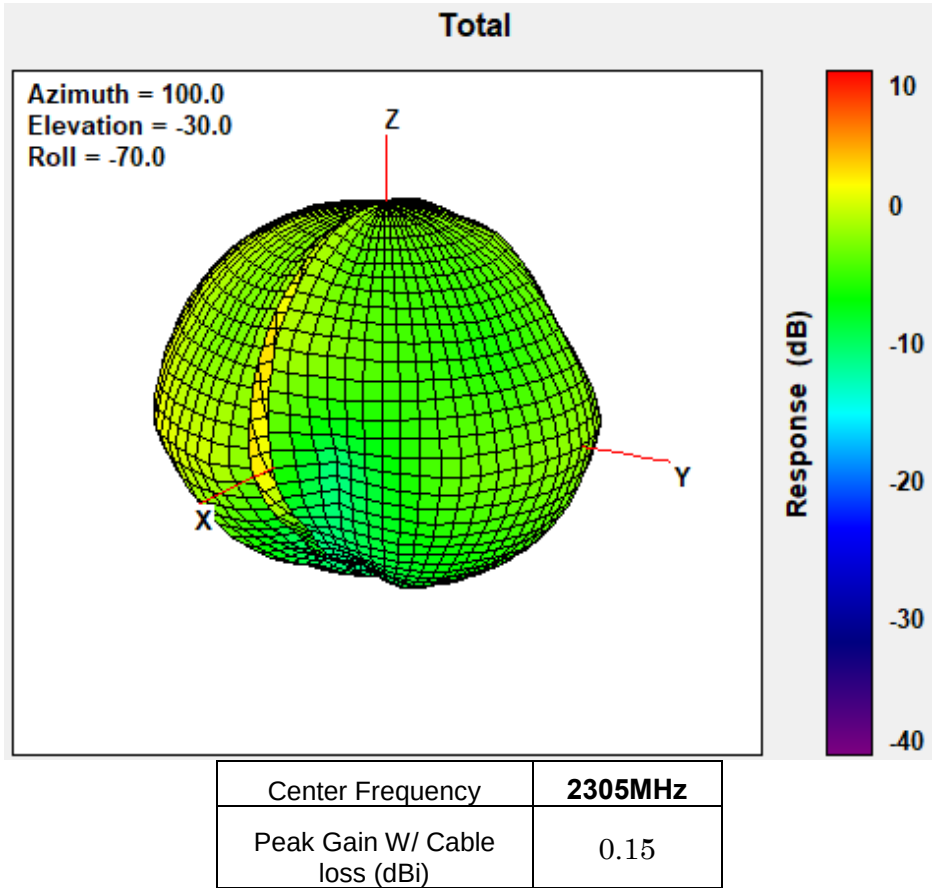


2310MHz

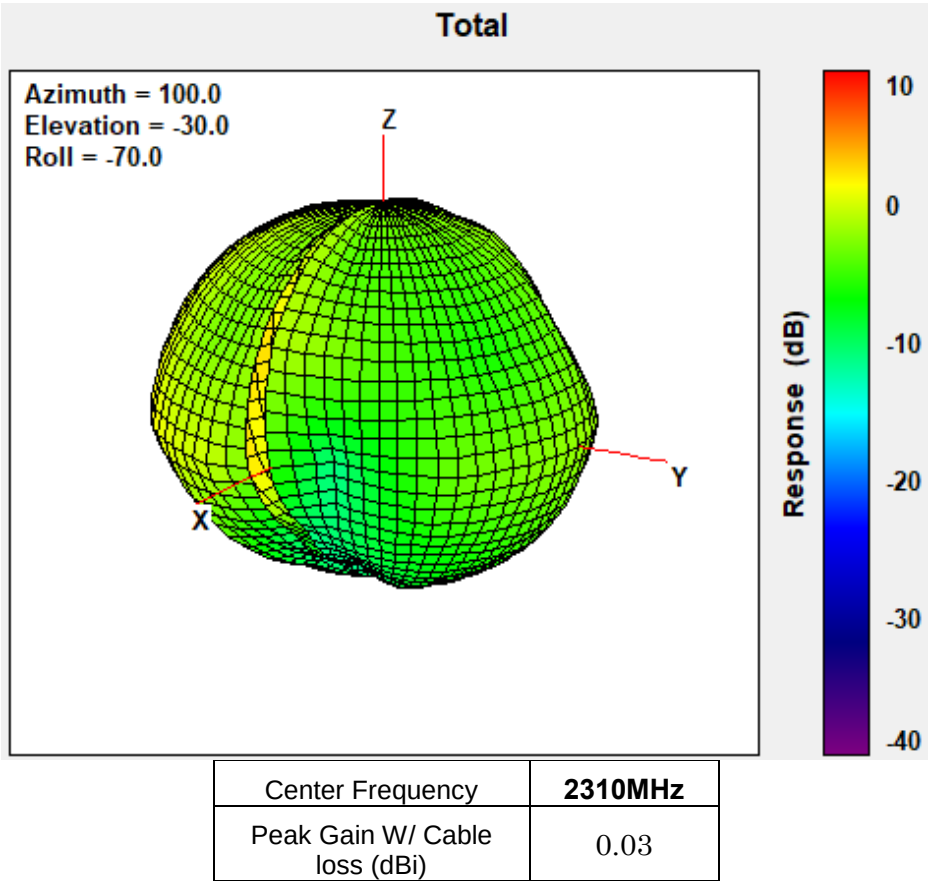


2315MHz

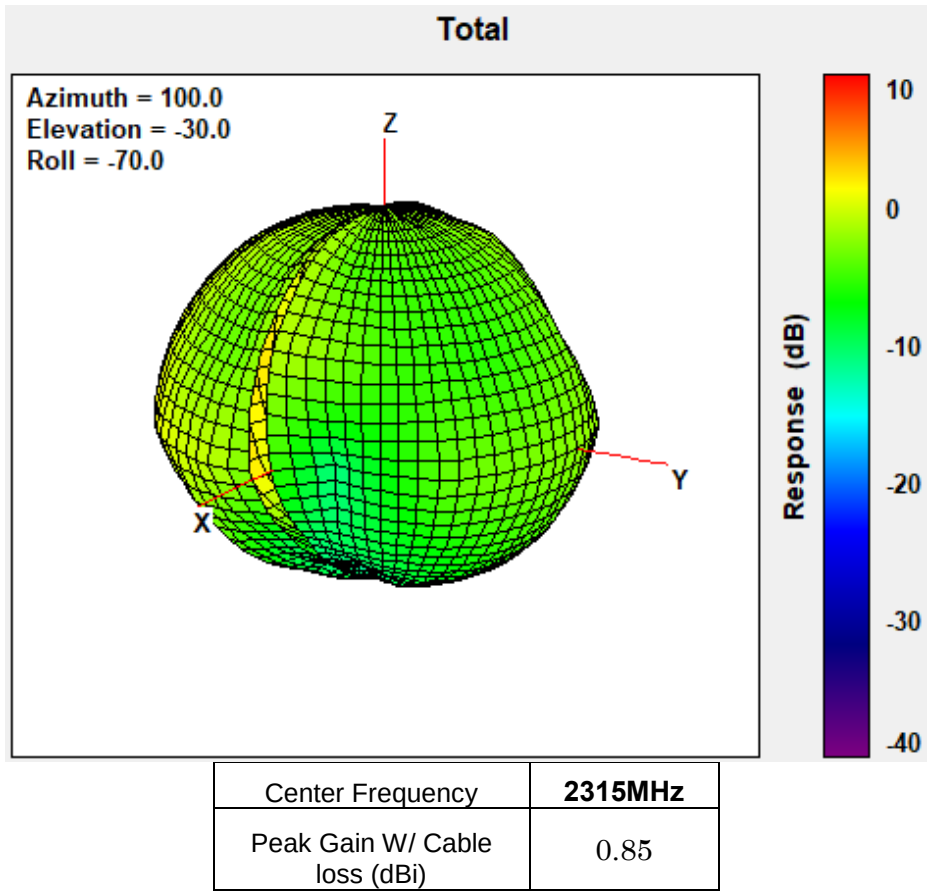


2350MHz

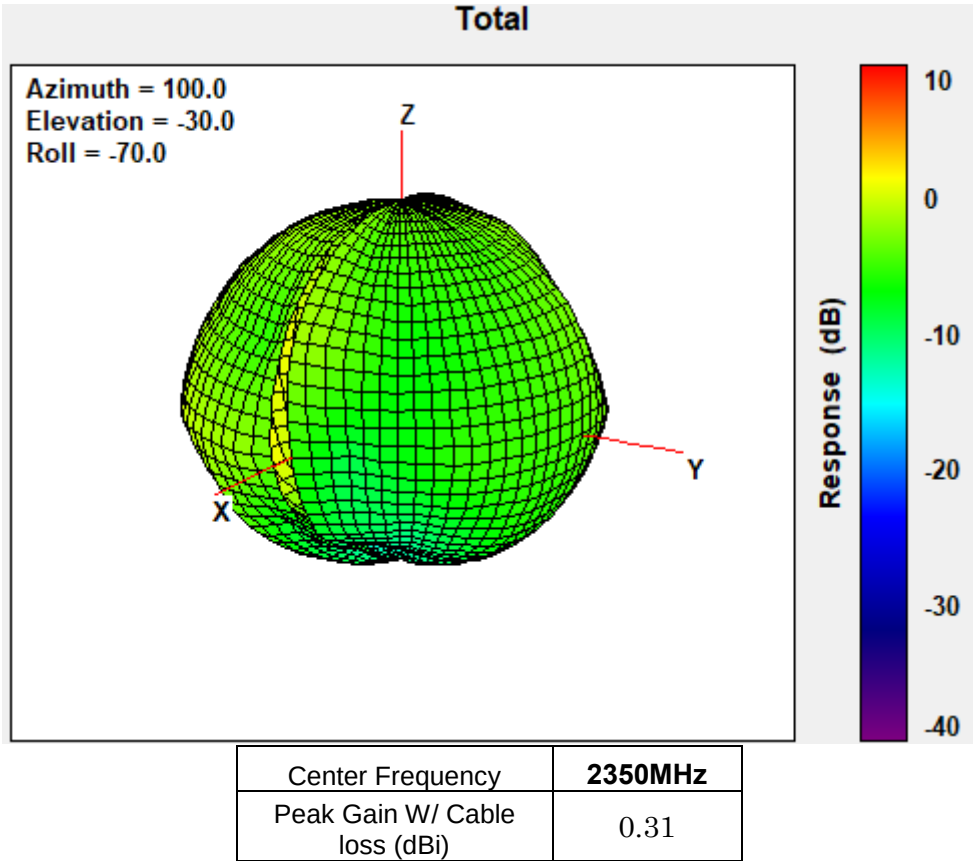


2400MHz

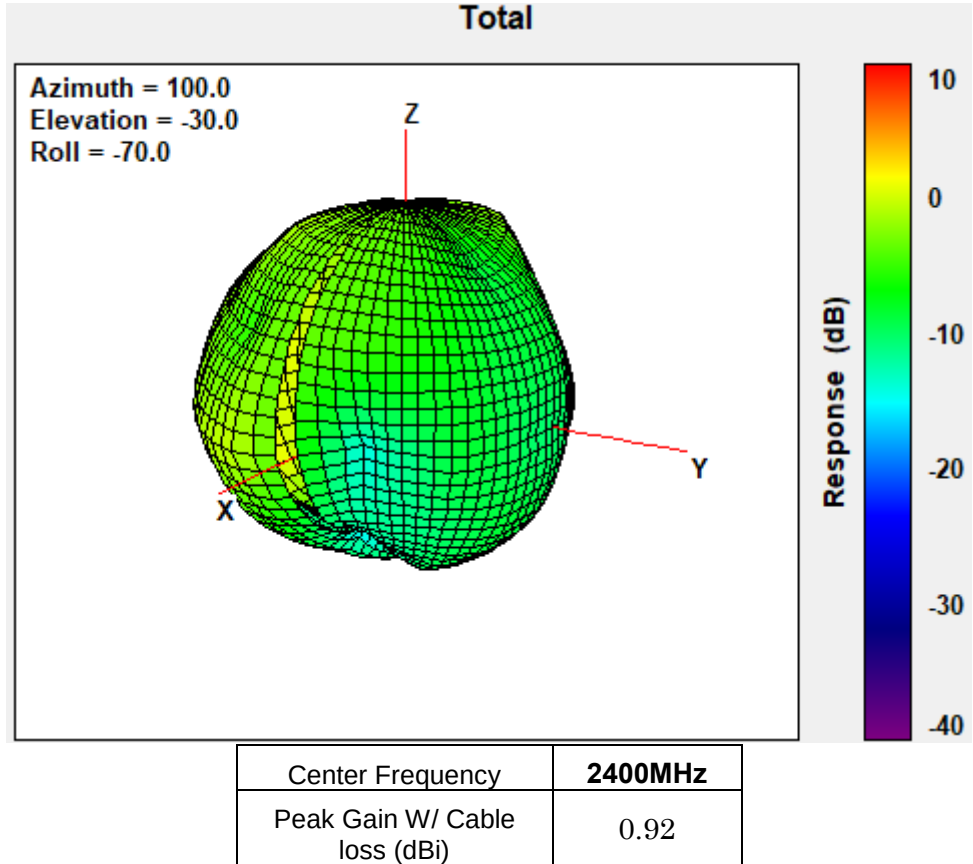


2483.5MHz

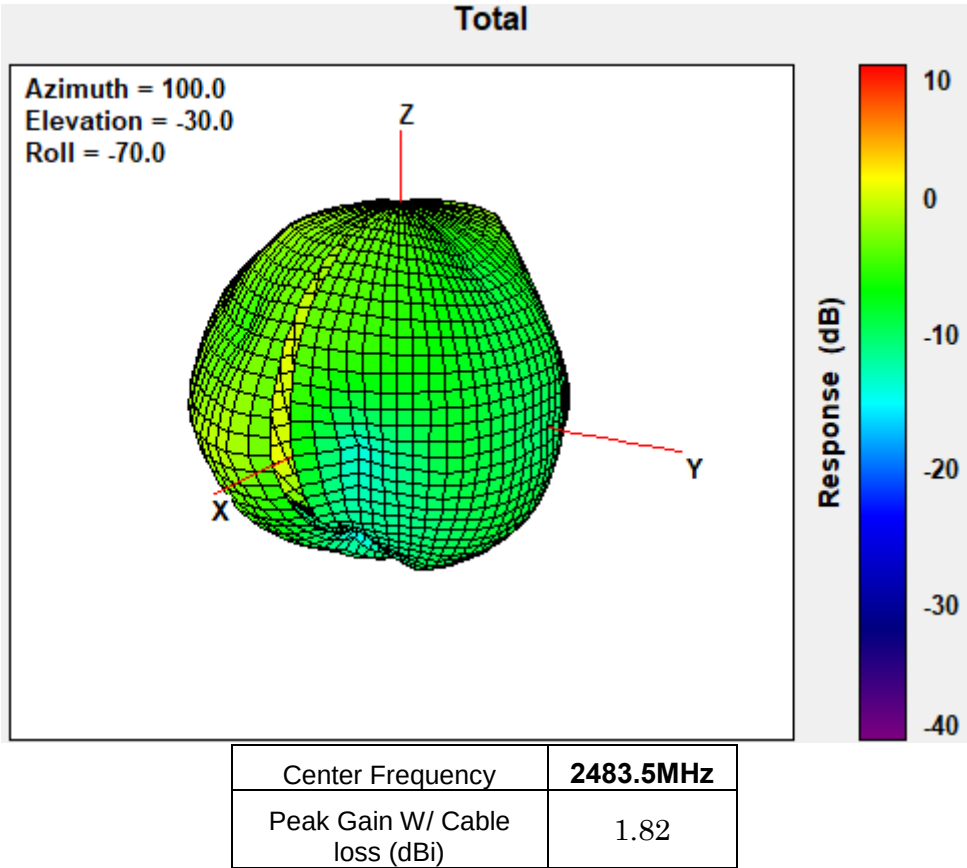


2489.25MHz

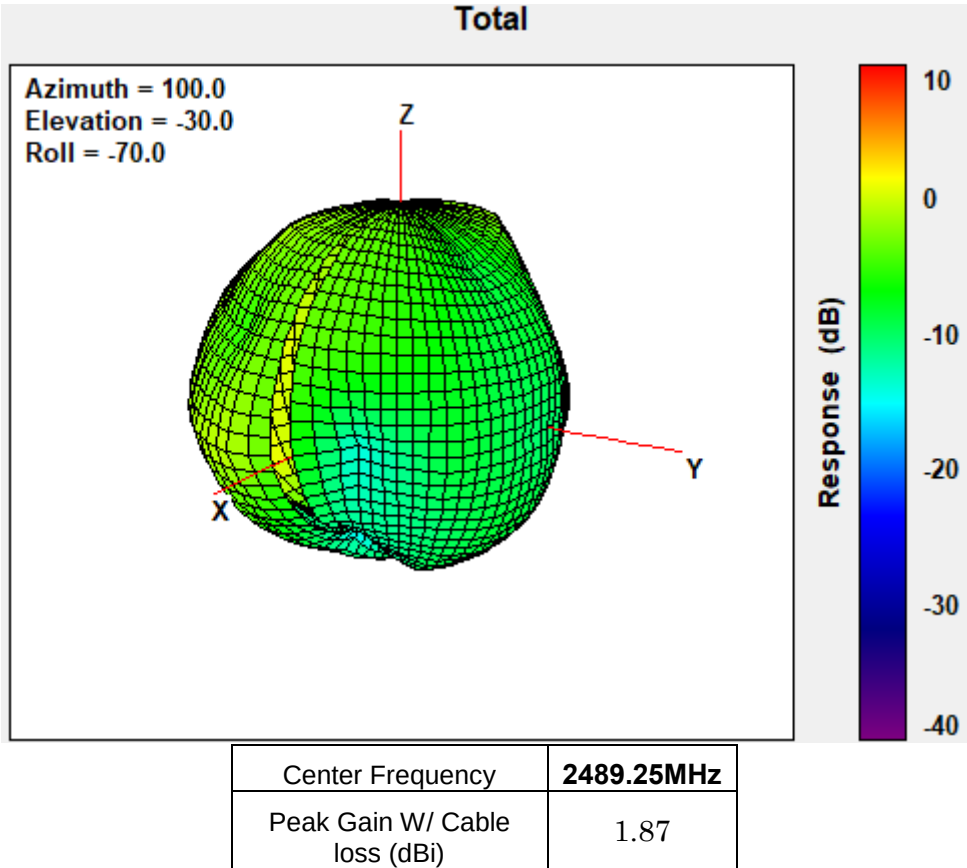


2495MHz

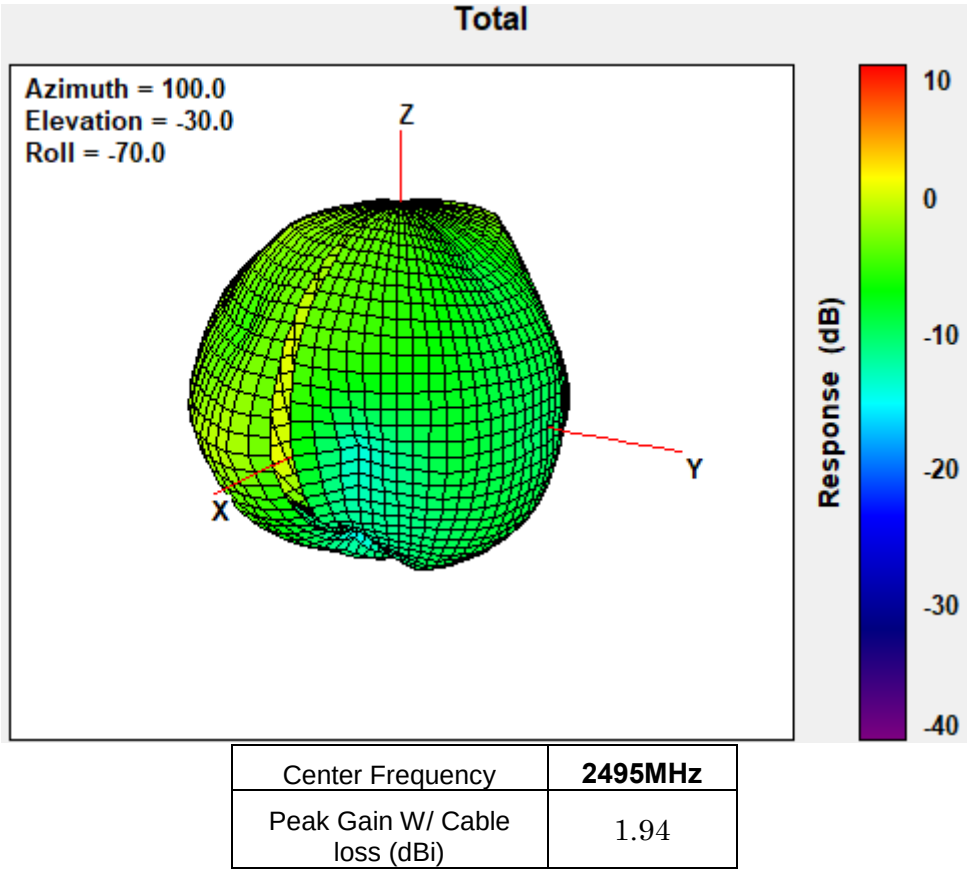


2496MHz

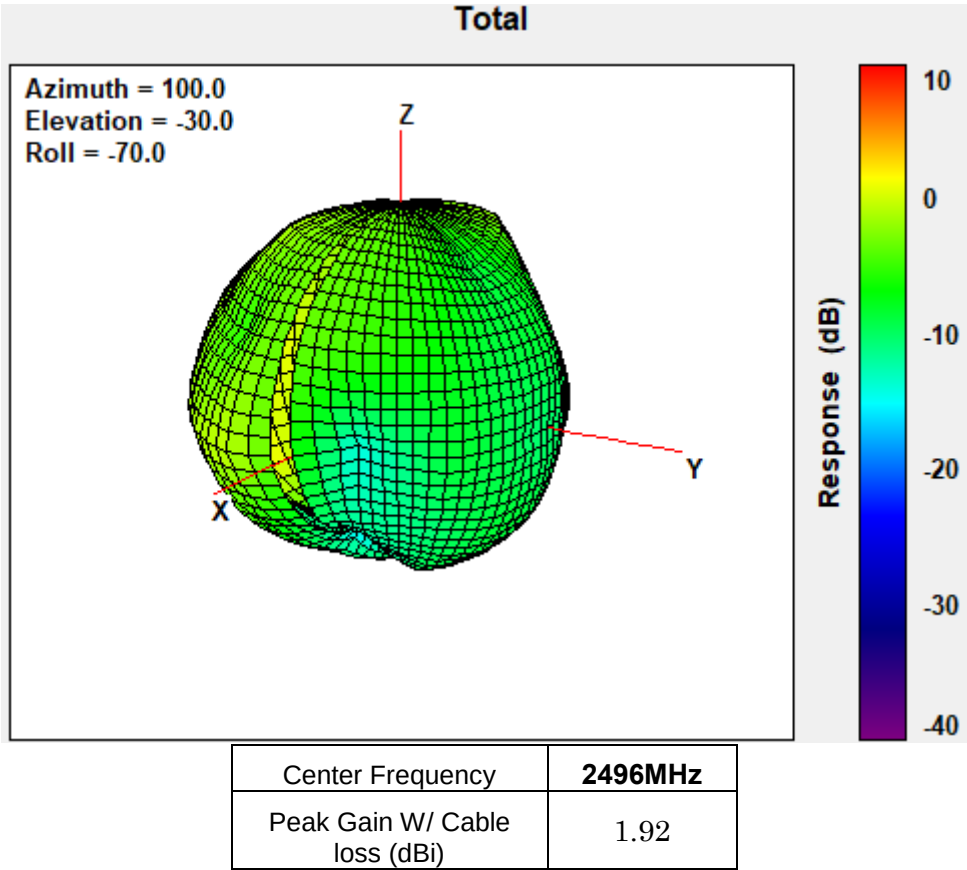


2500MHz

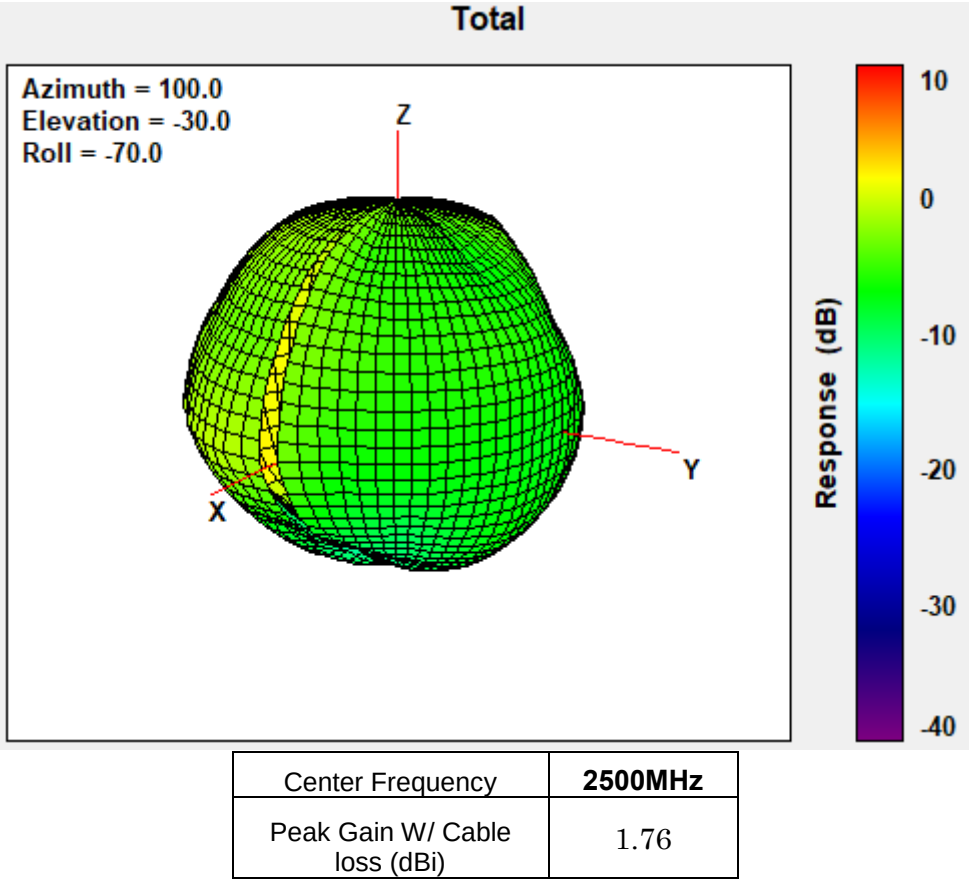


2535MHz

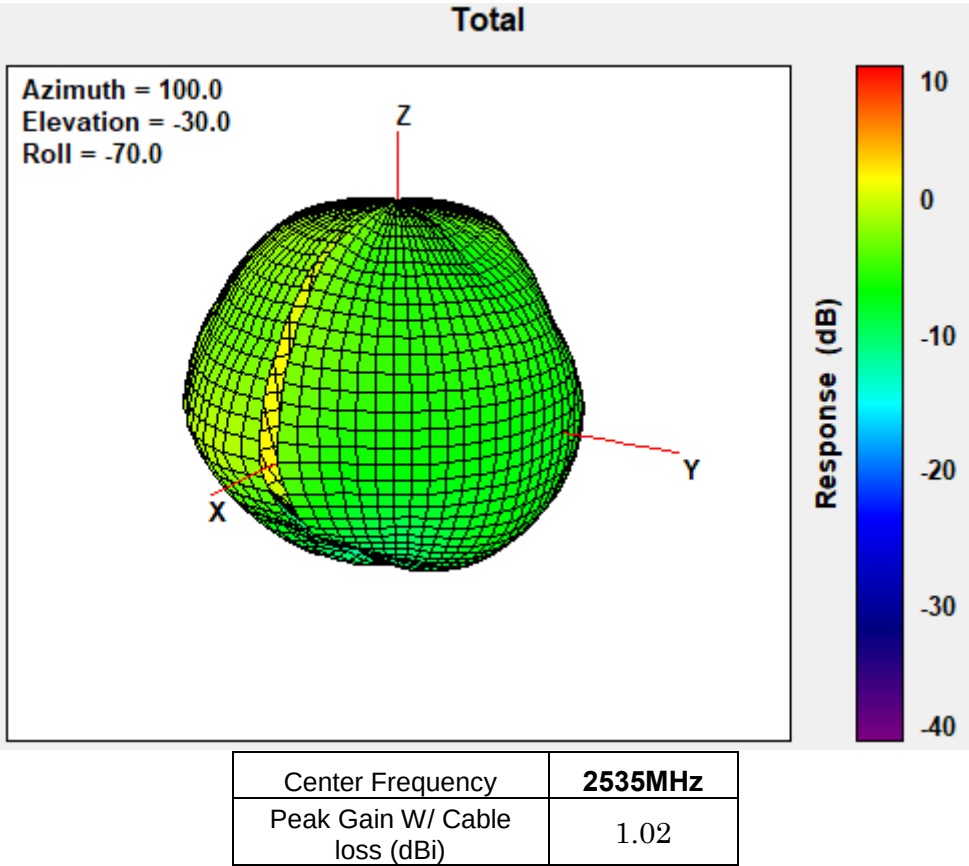


2570MHz

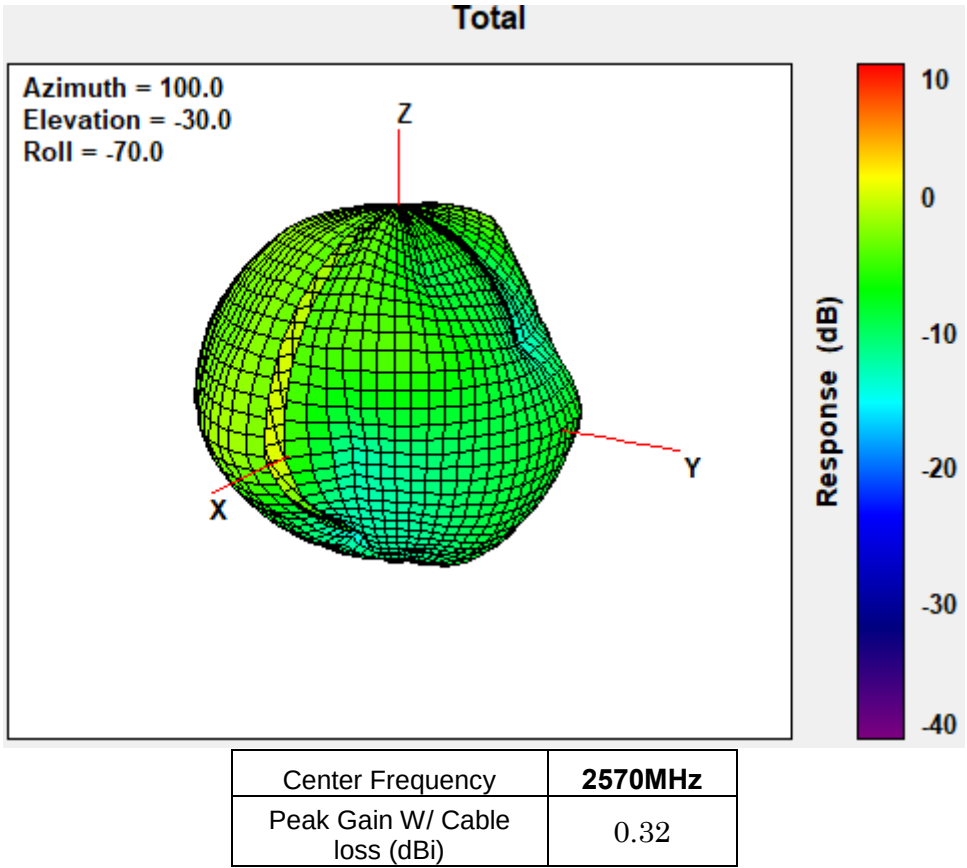


2593MHz

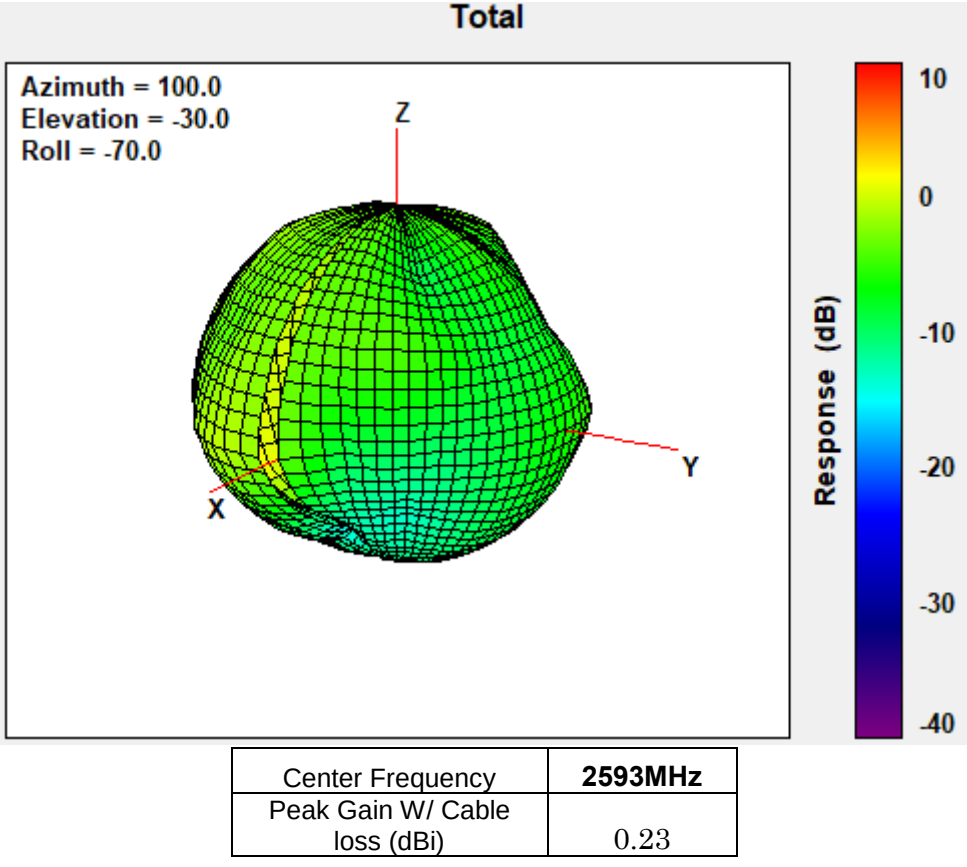


2595MHz

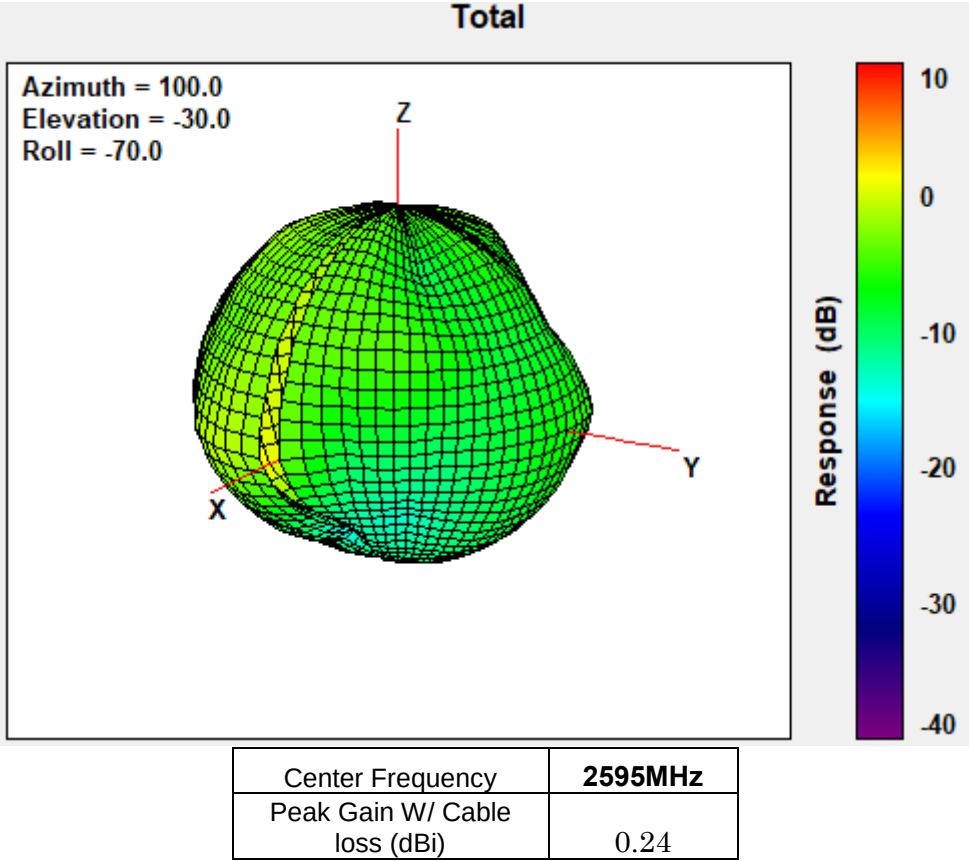


2620MHz

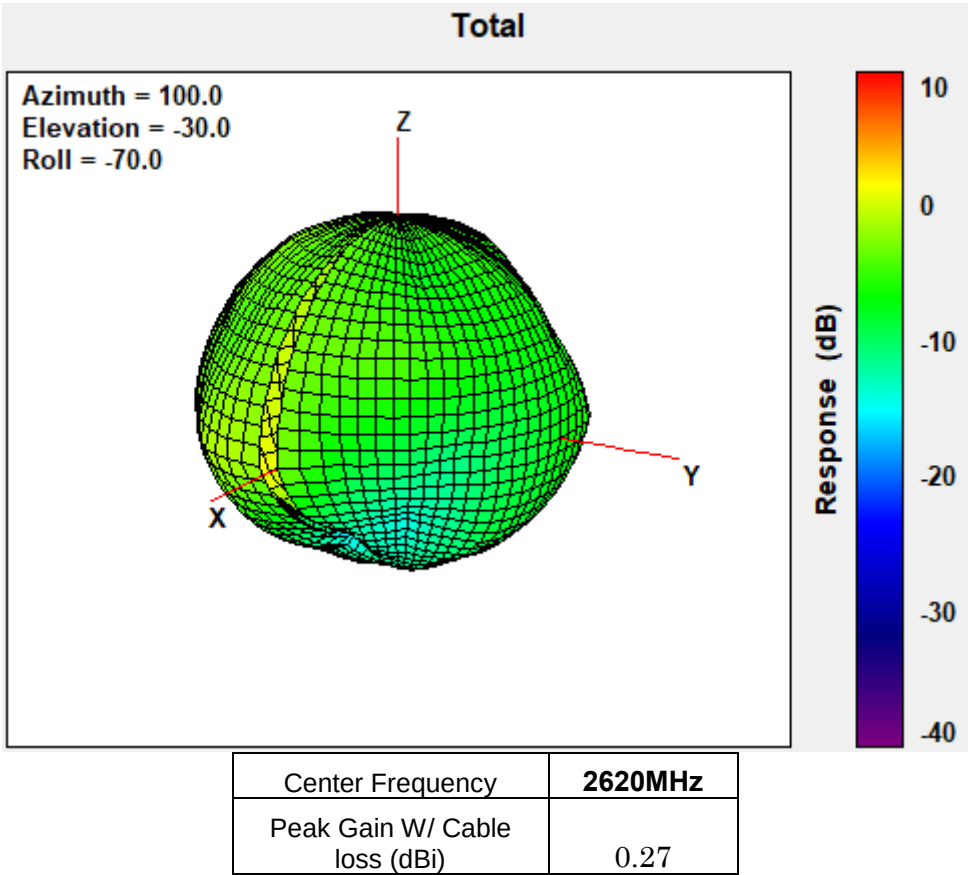


2690MHz

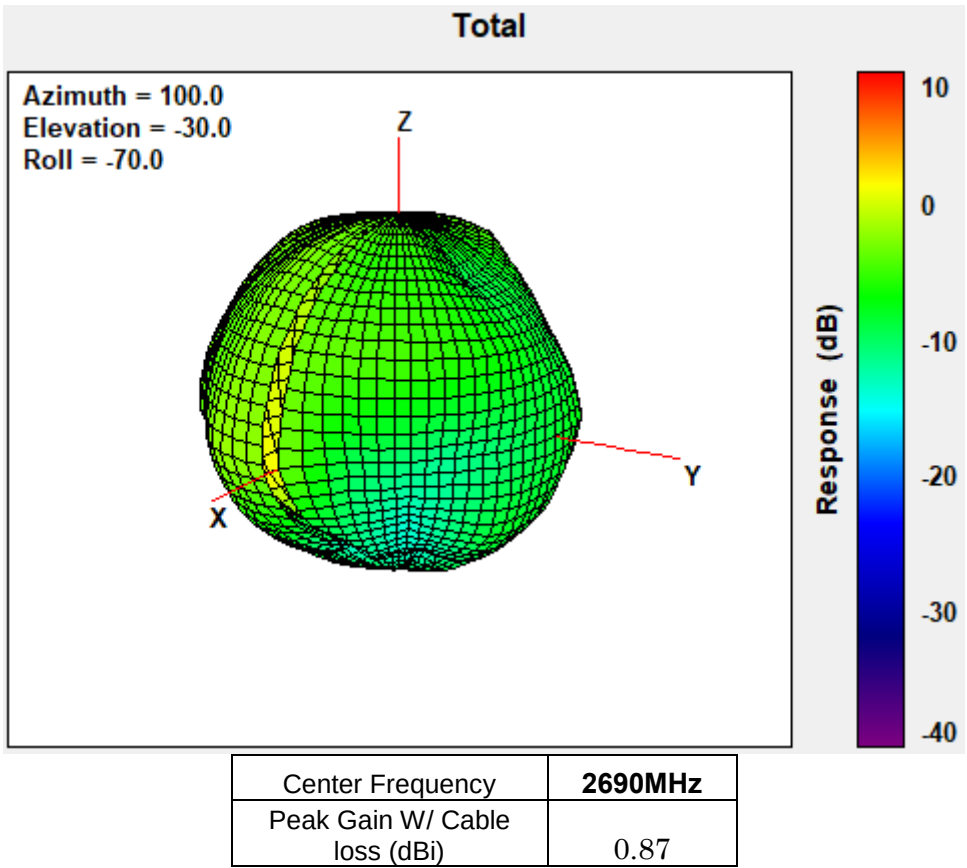


3300MHz

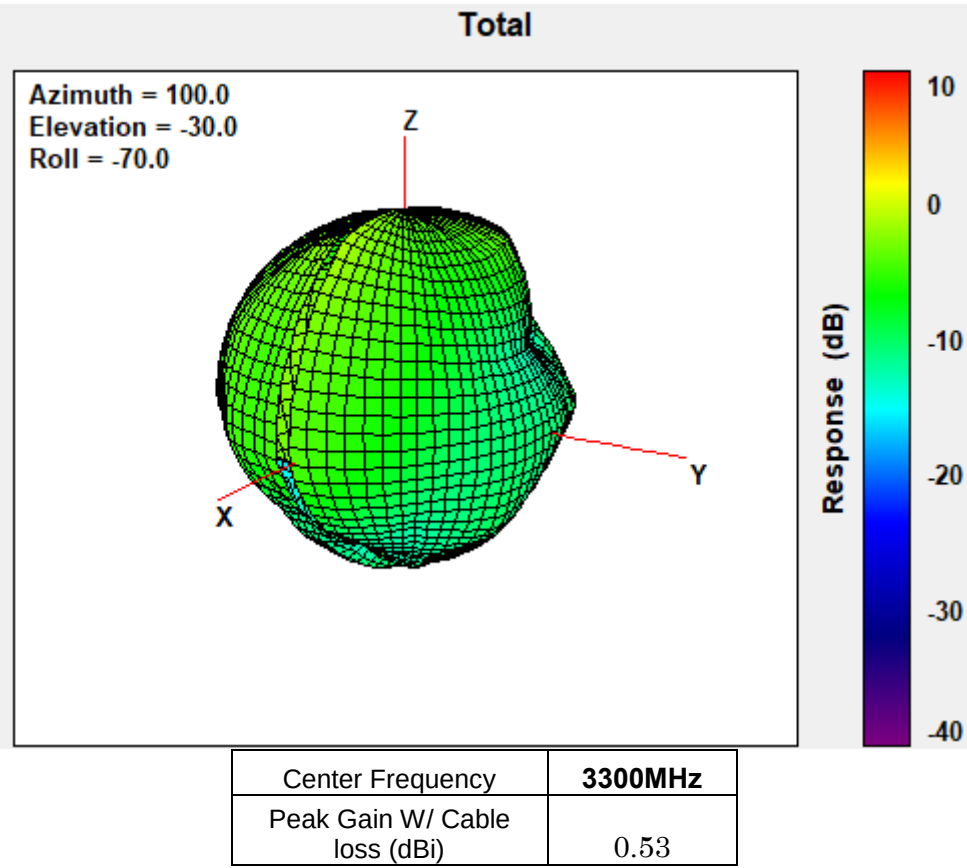


3400MHz

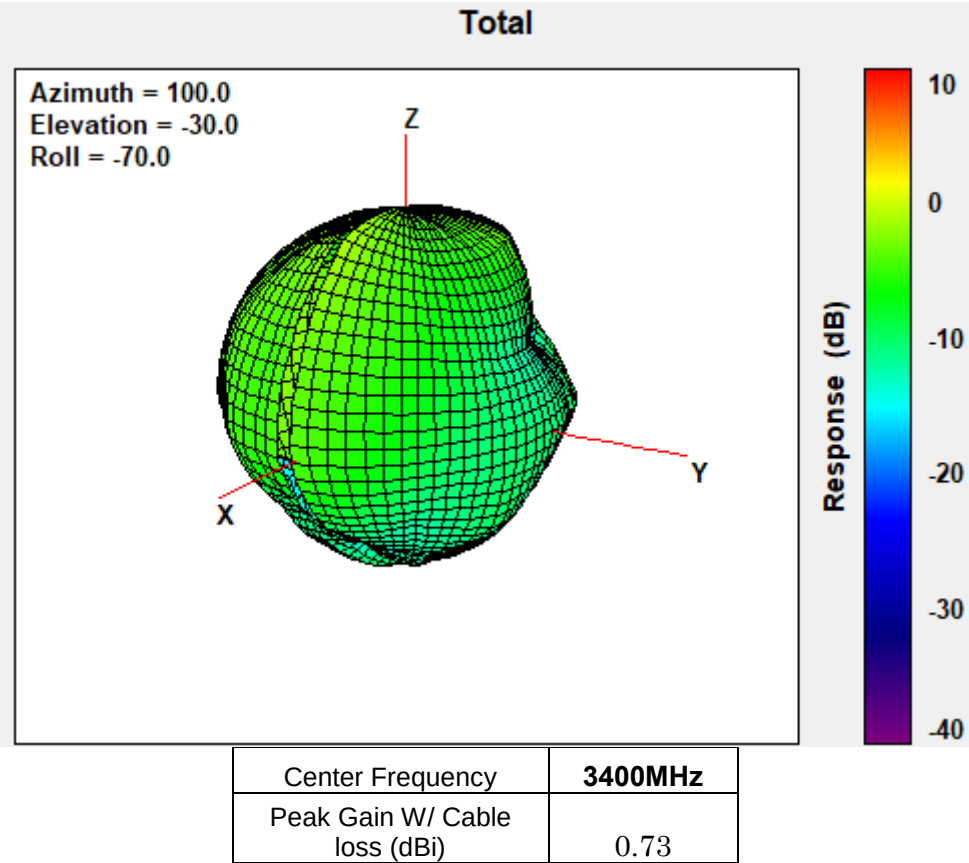


3500MHz

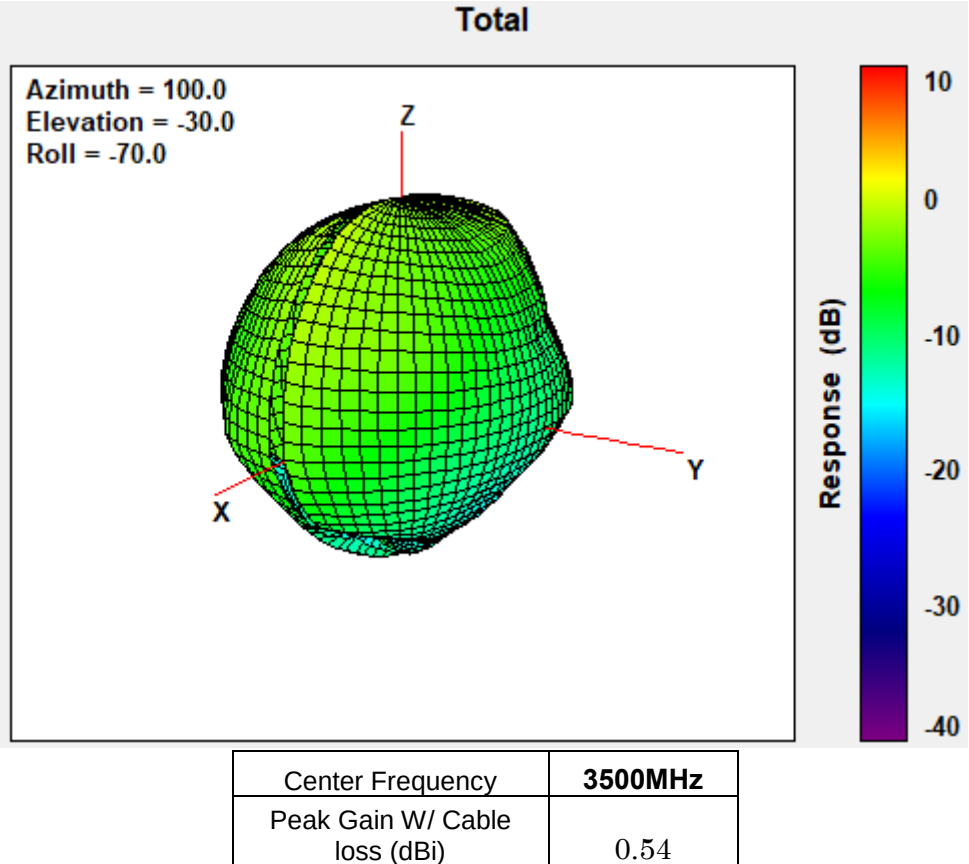


3550MHz

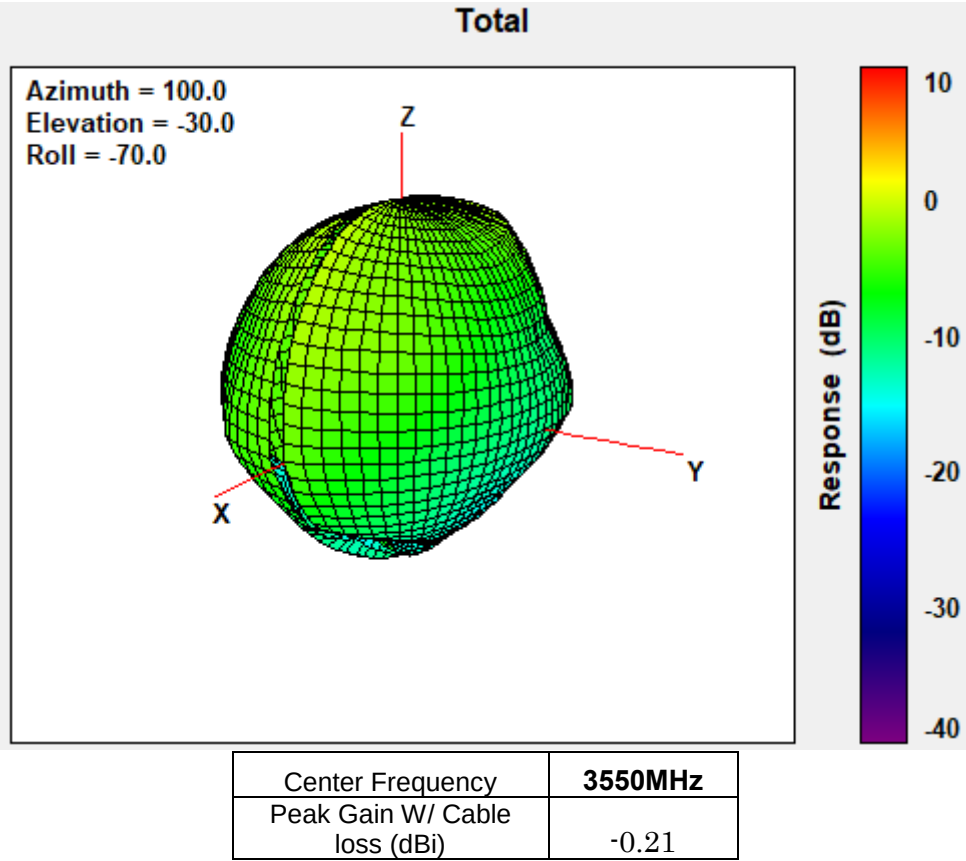


3600MHz

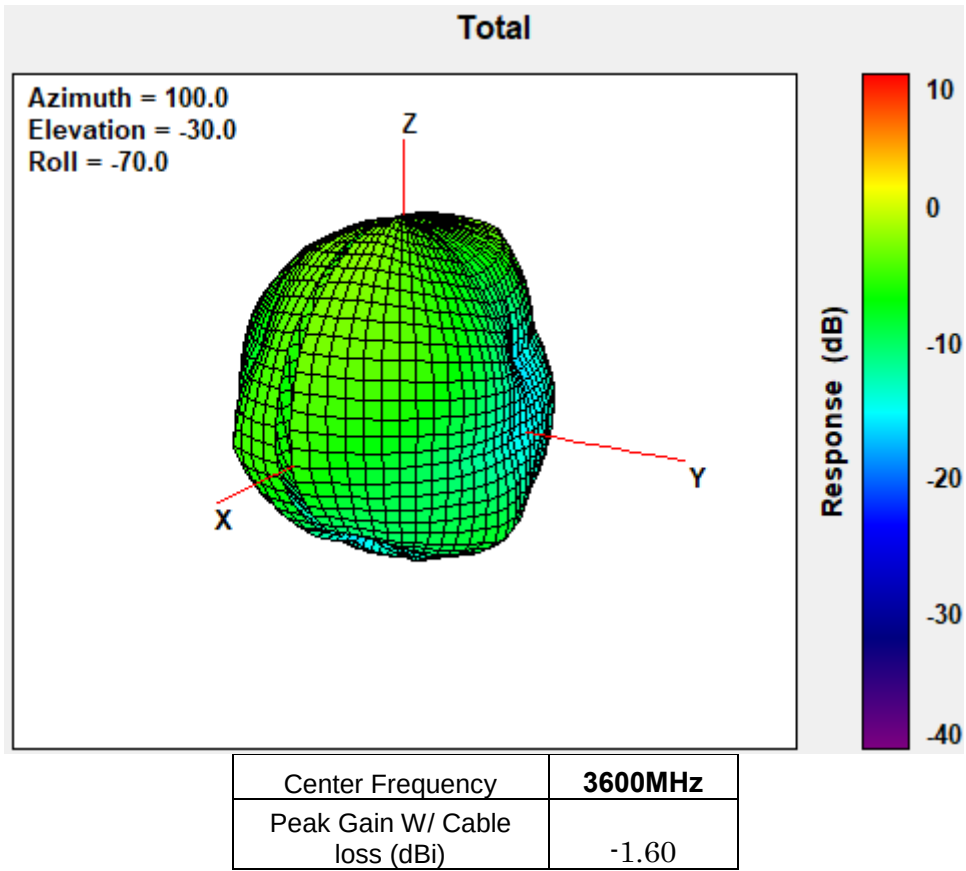


3625MHz

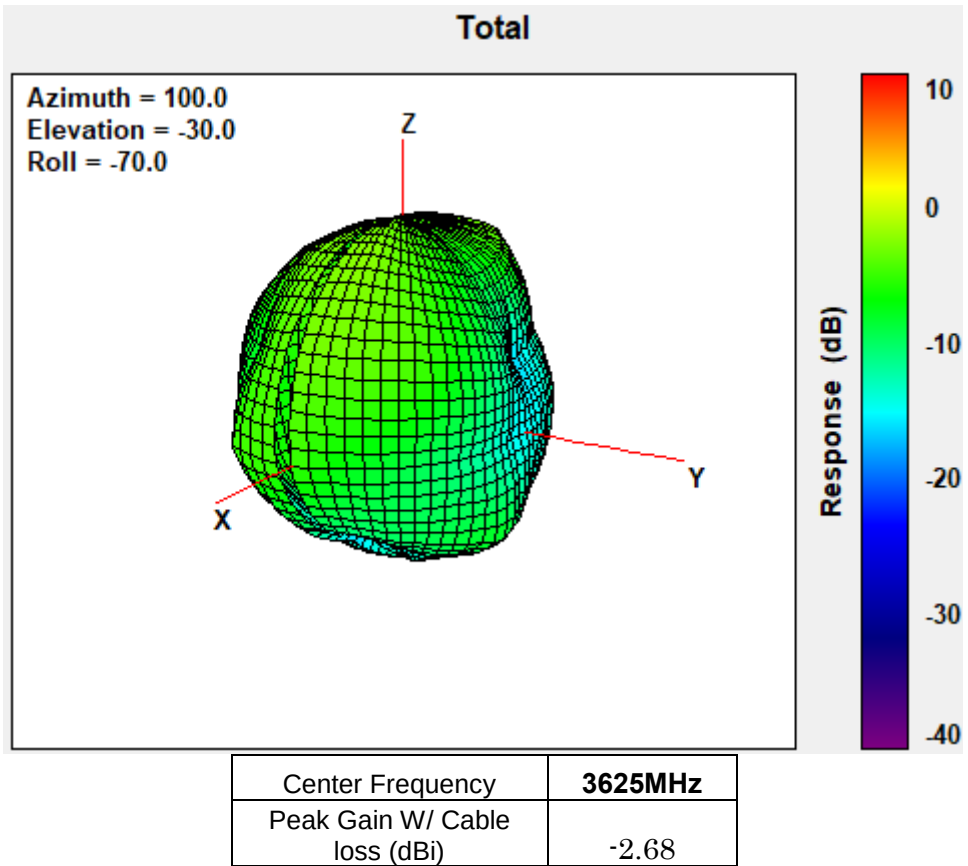


3700MHz

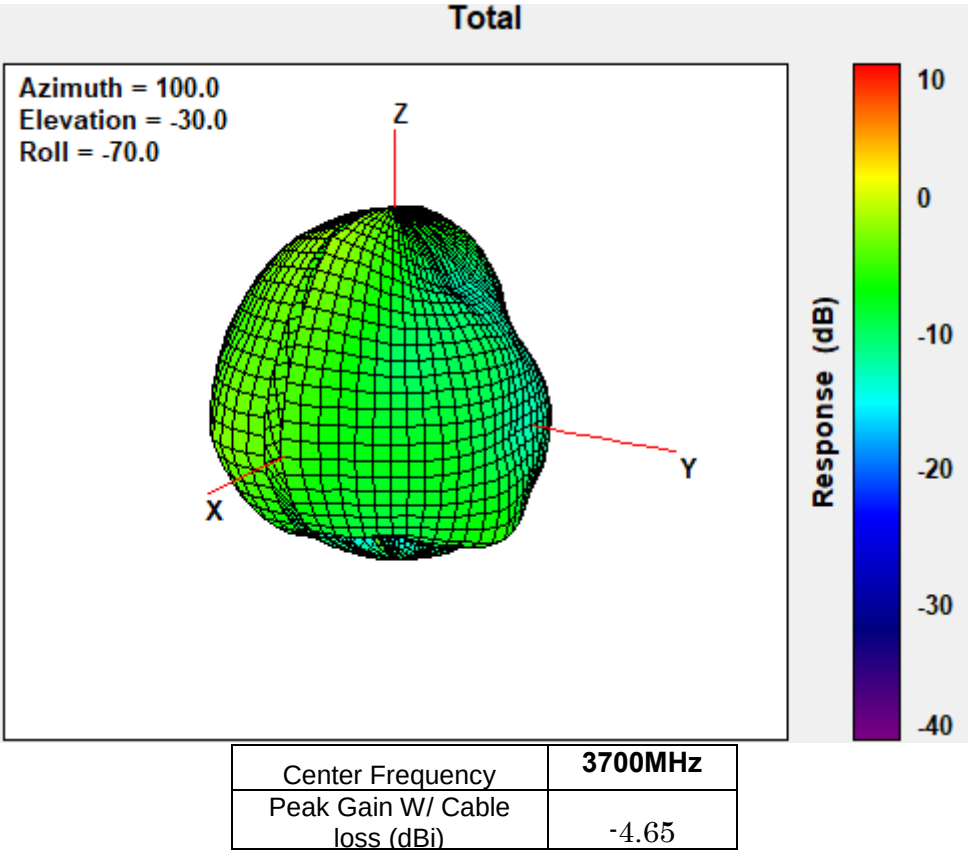


3750MHz

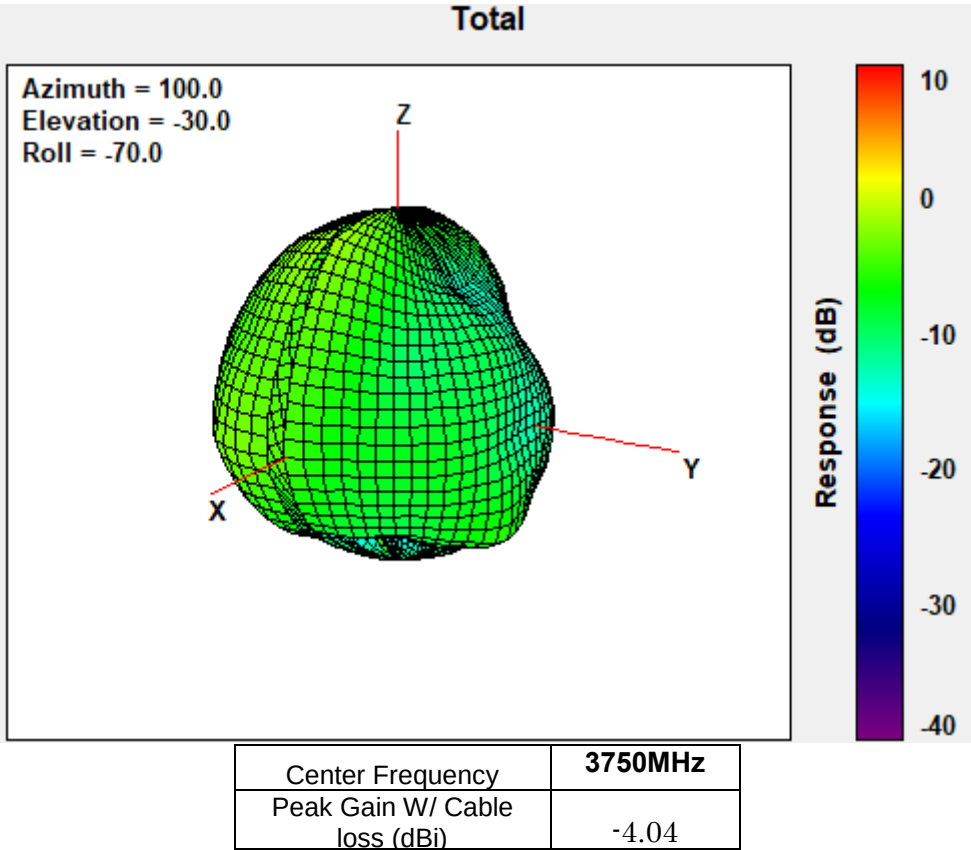


3800MHz

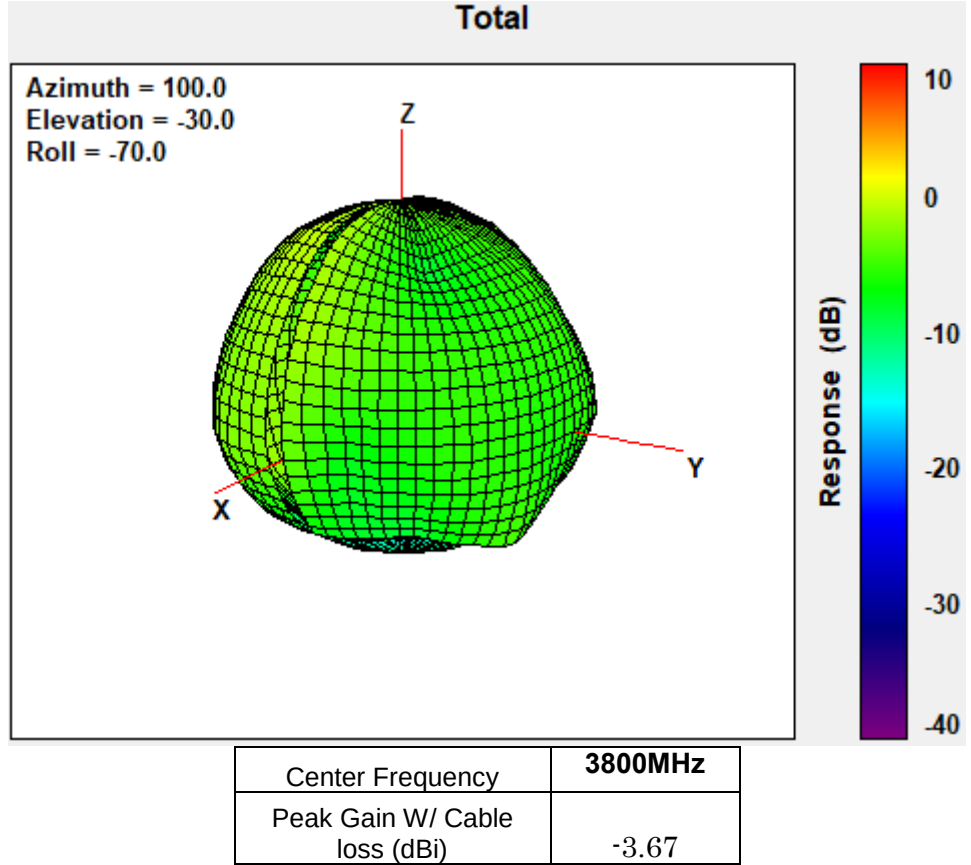


4200MHz

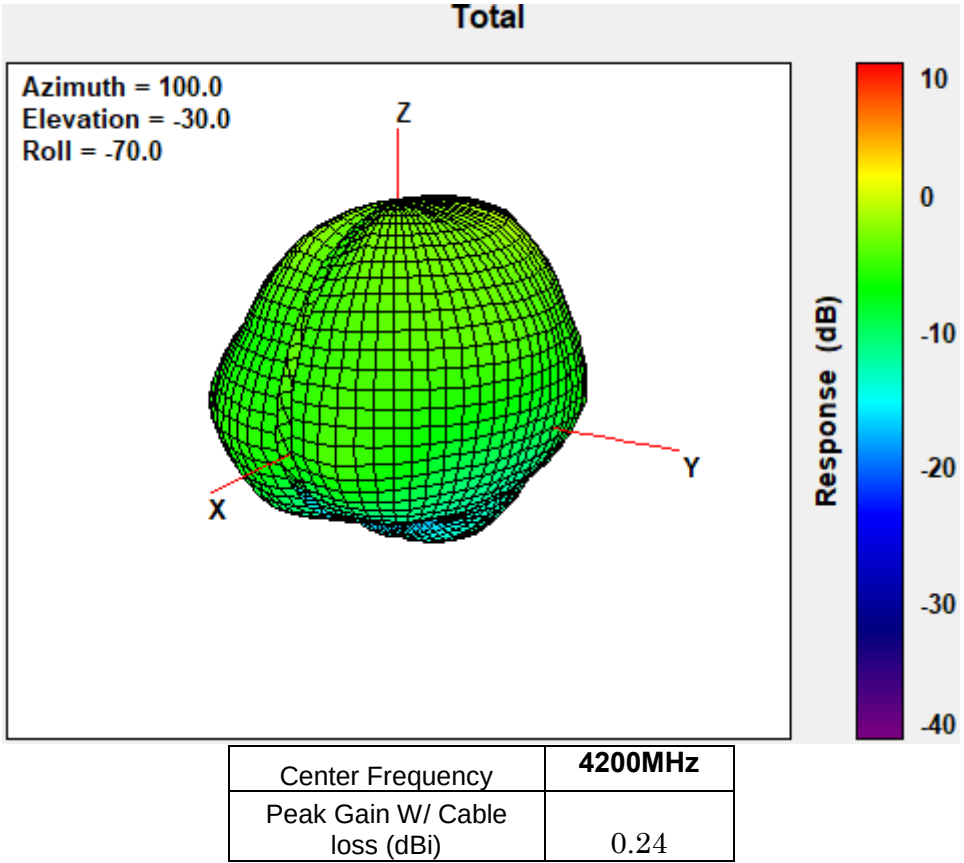


4400MHz

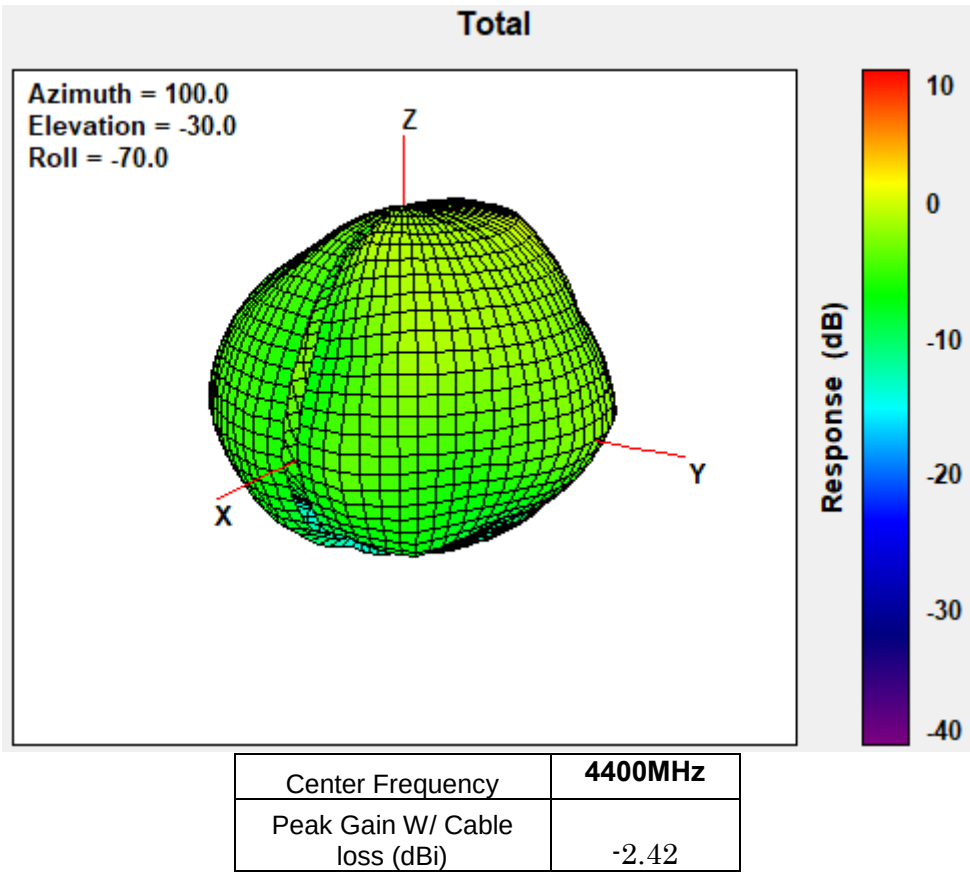

4700MHz

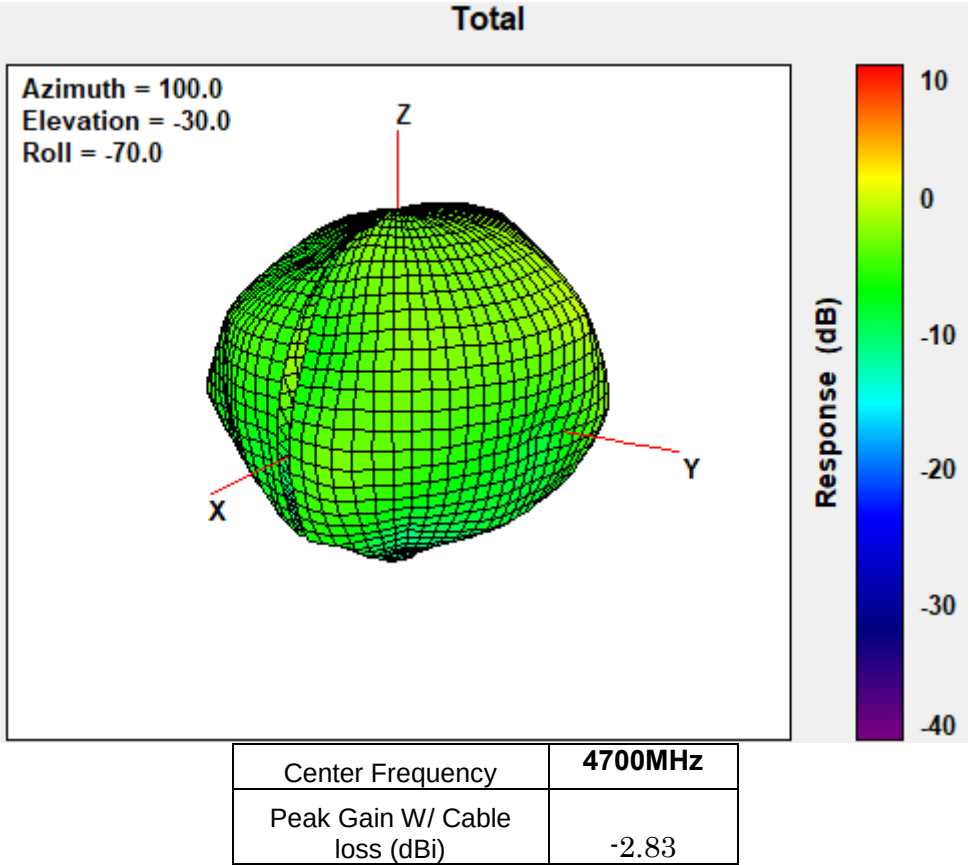


5000MHz

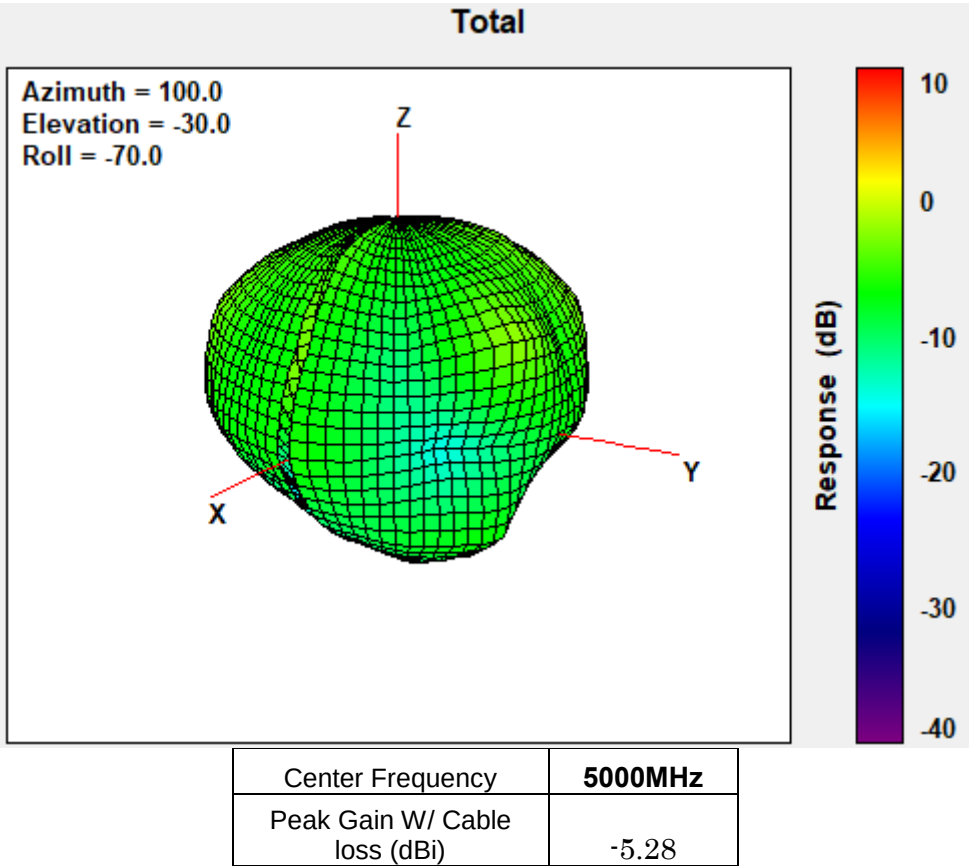


WWAN MIMO2 Antenna (Tx2)


1695 MHz

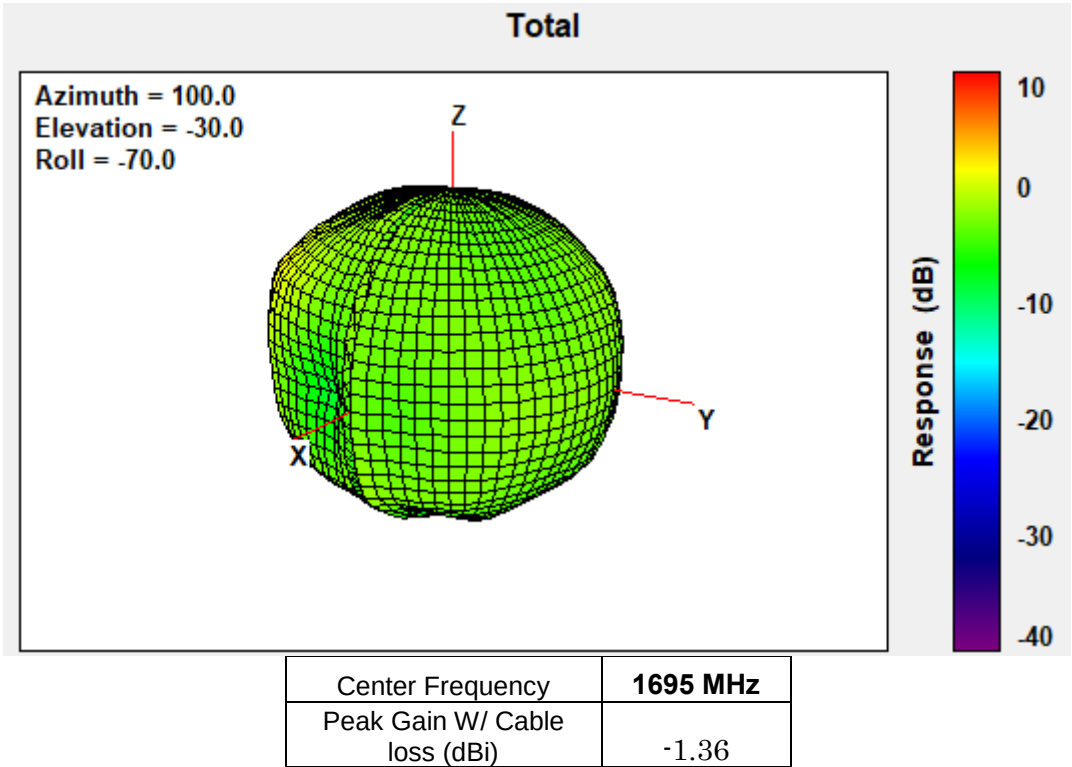


1702.5 MHz

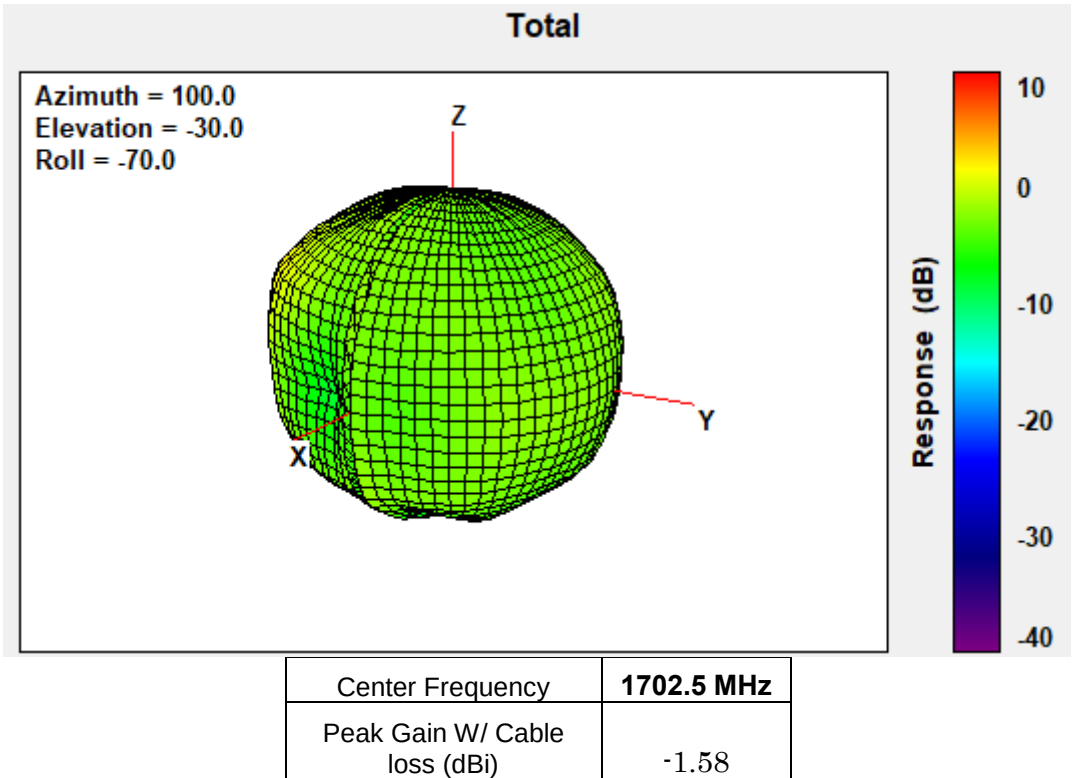


1710 MHz

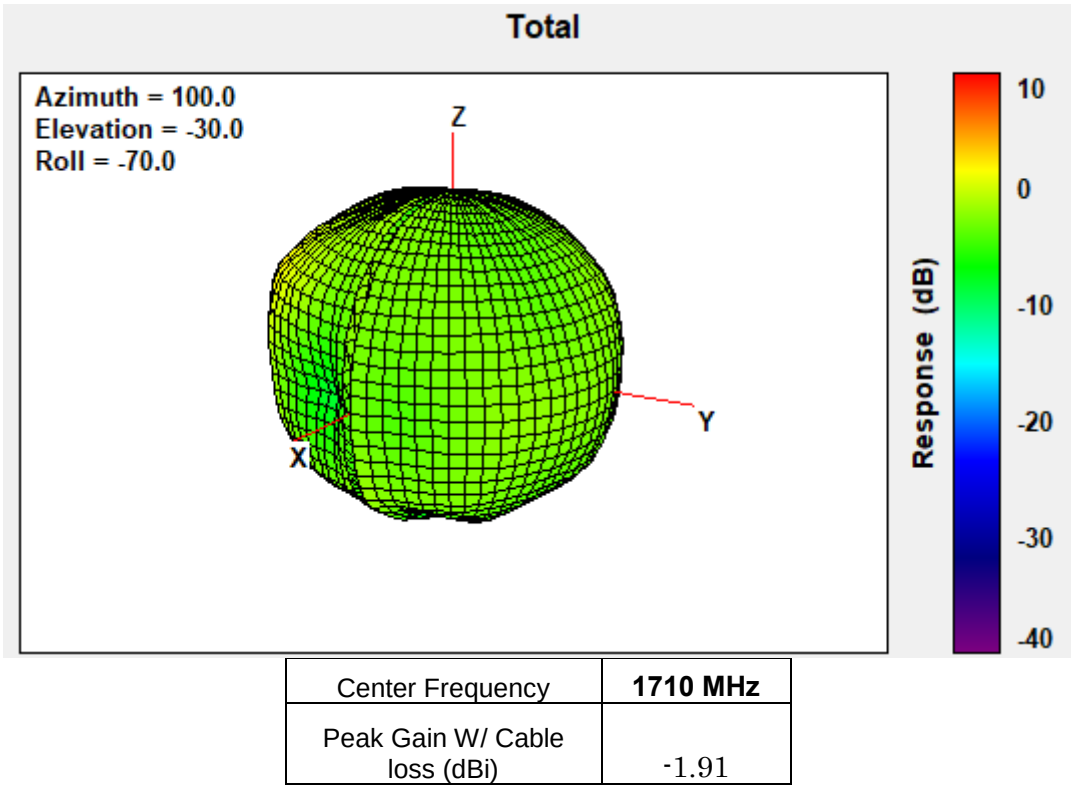


1732.5 MHz

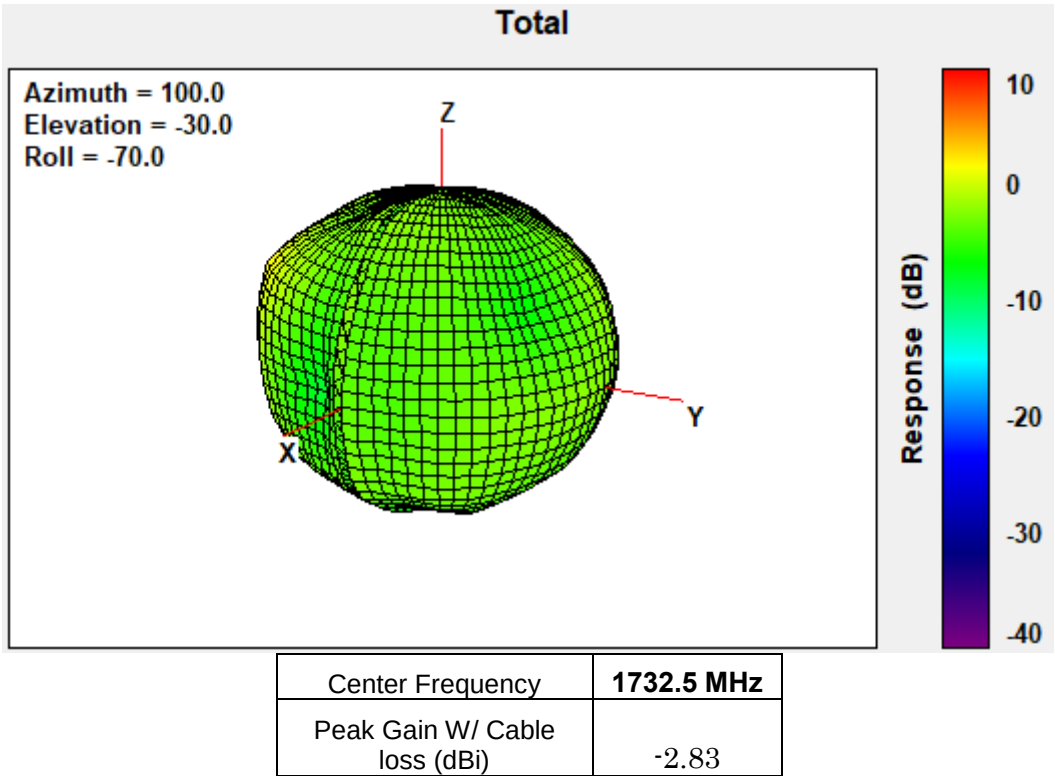


1745 MHz

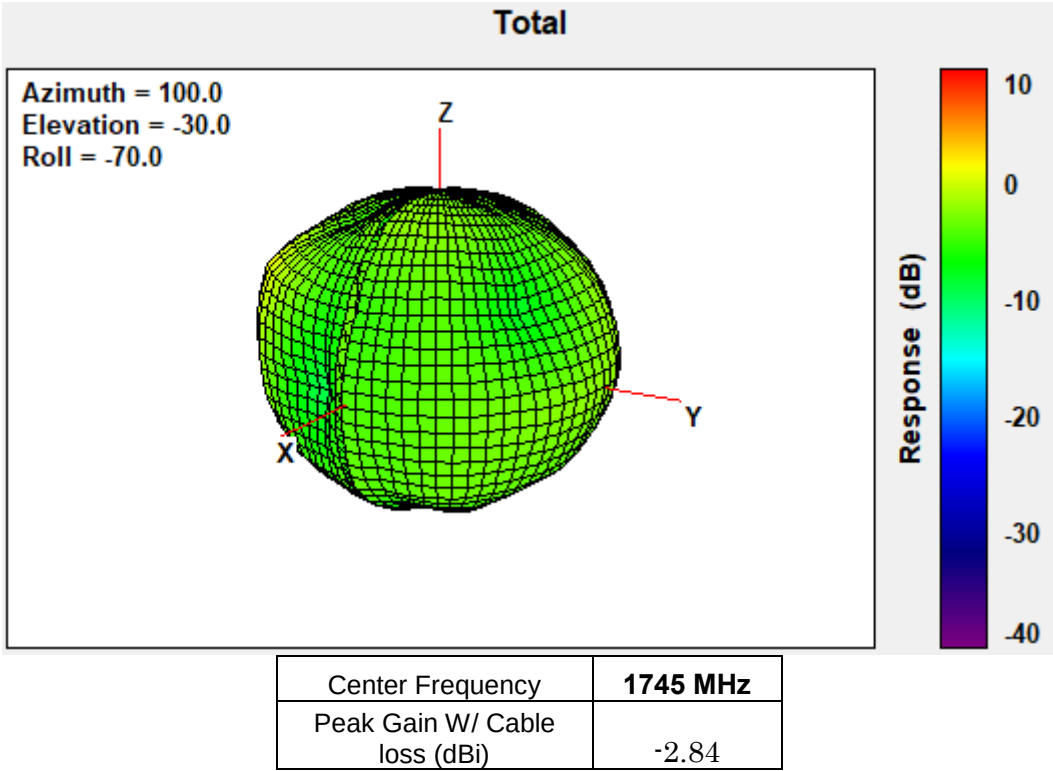


1747.5 MHz

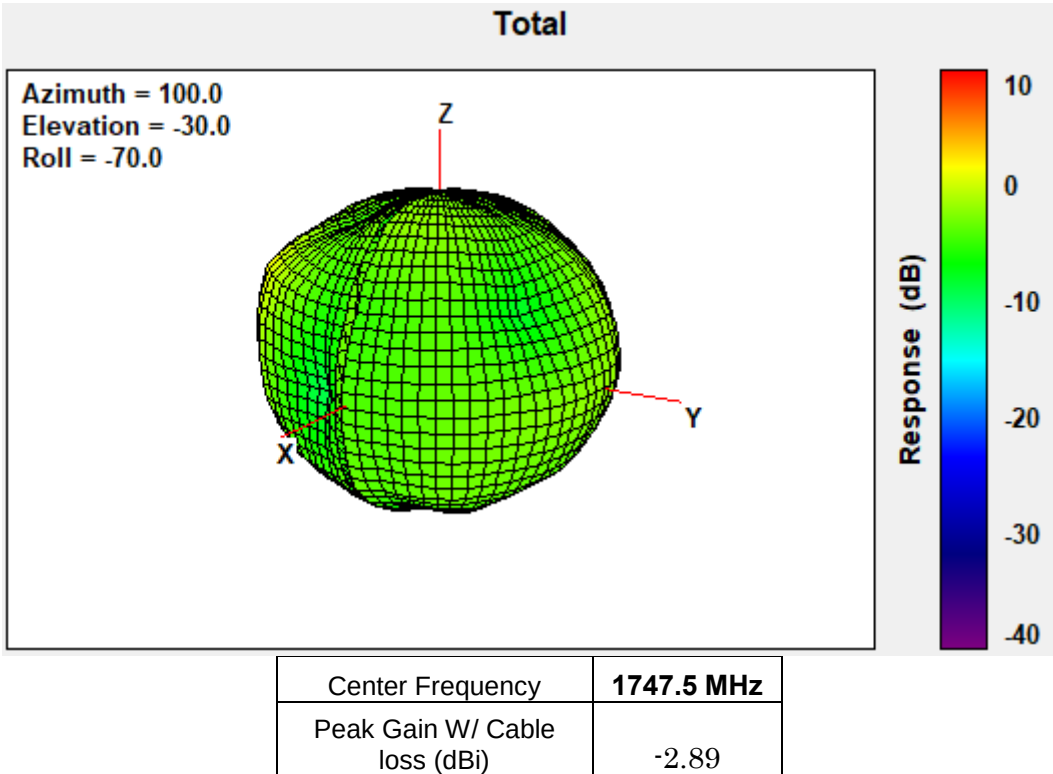


1755 MHz

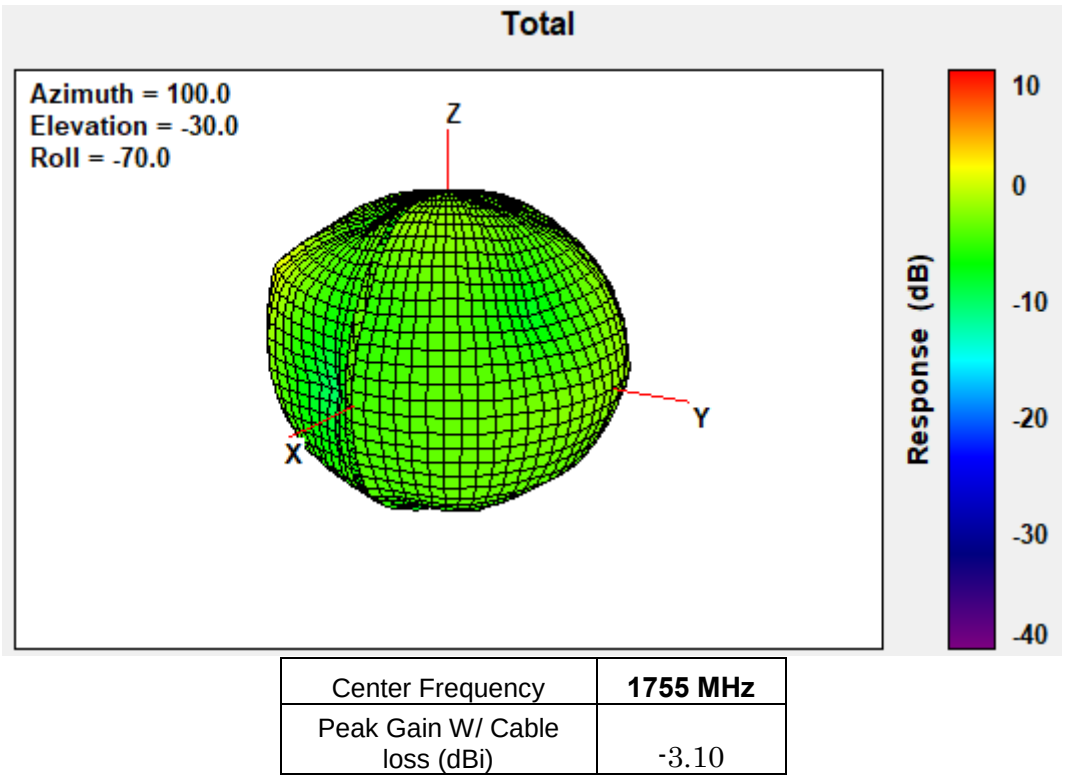


1780 MHz

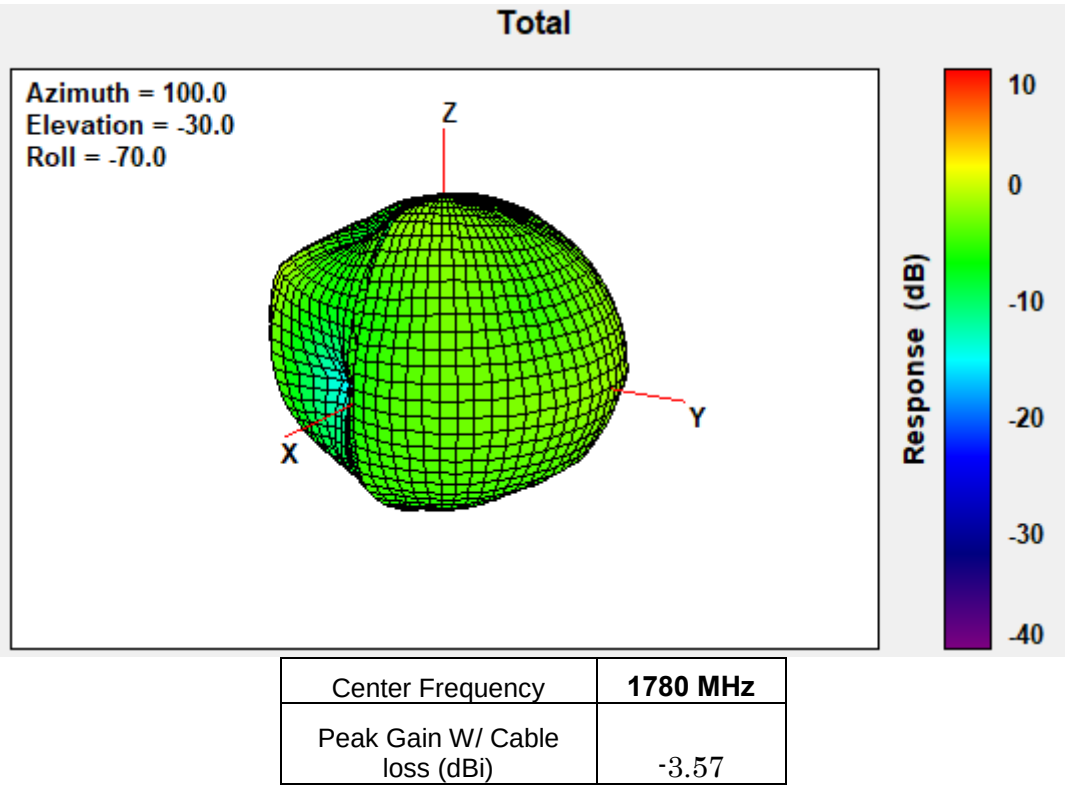


1785 MHz

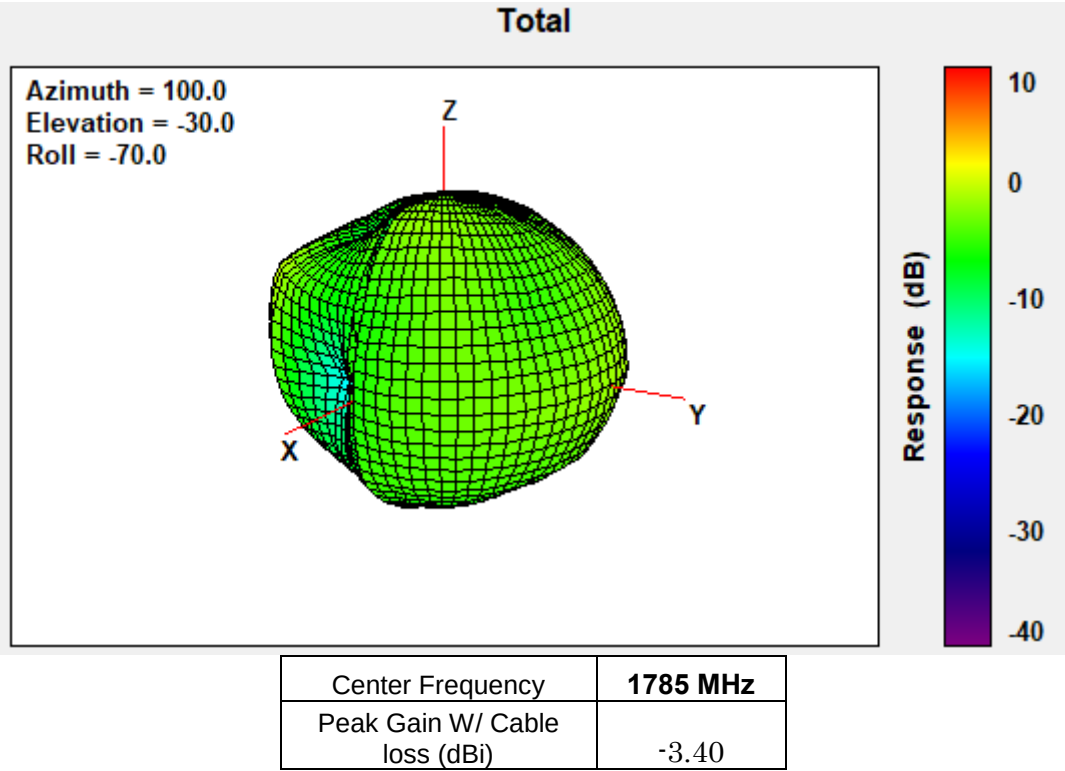


1850 MHz

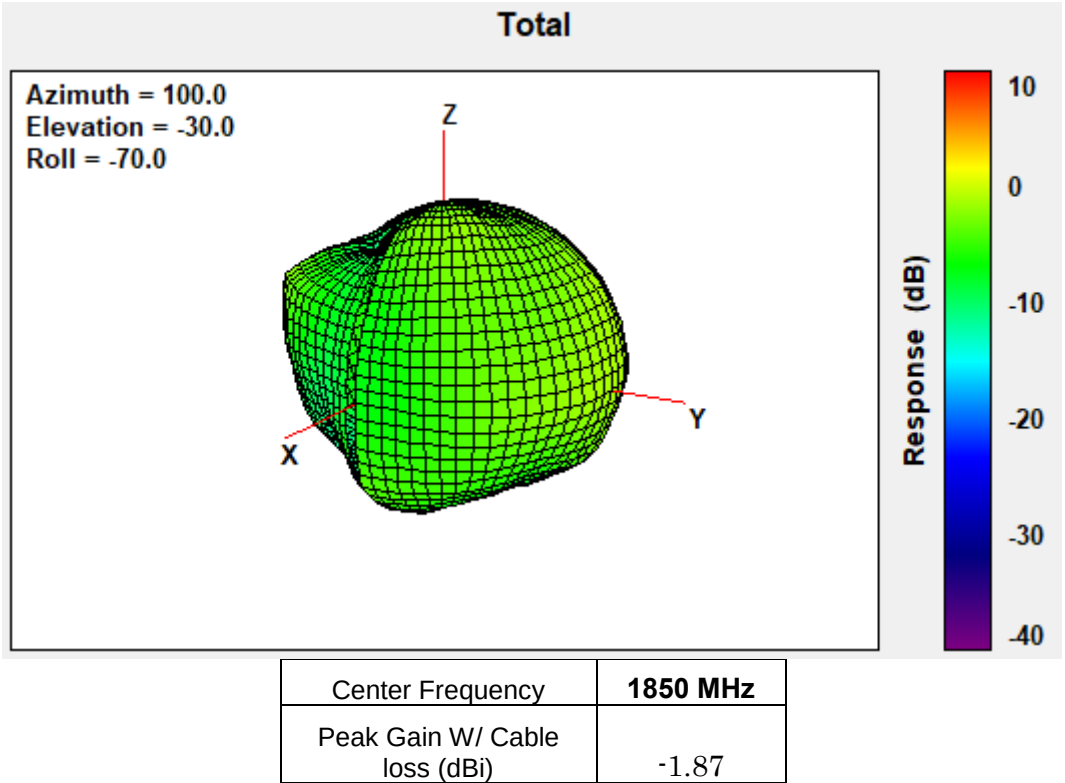


1880 MHz

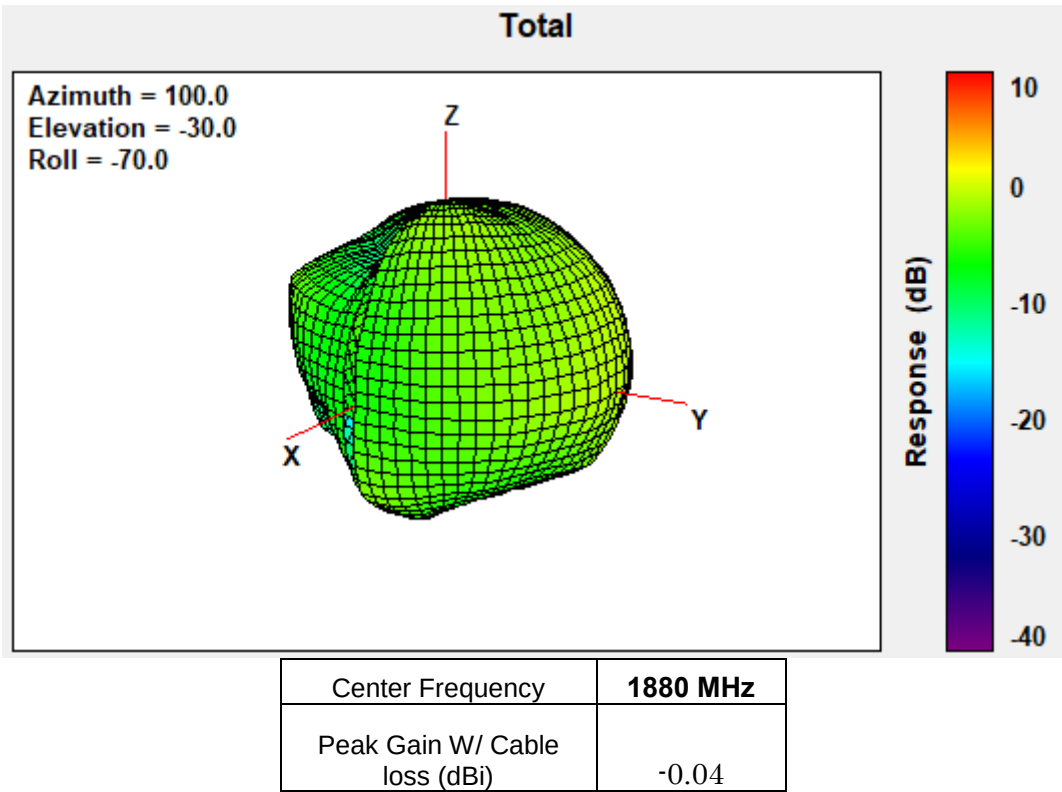


1882.5 MHz

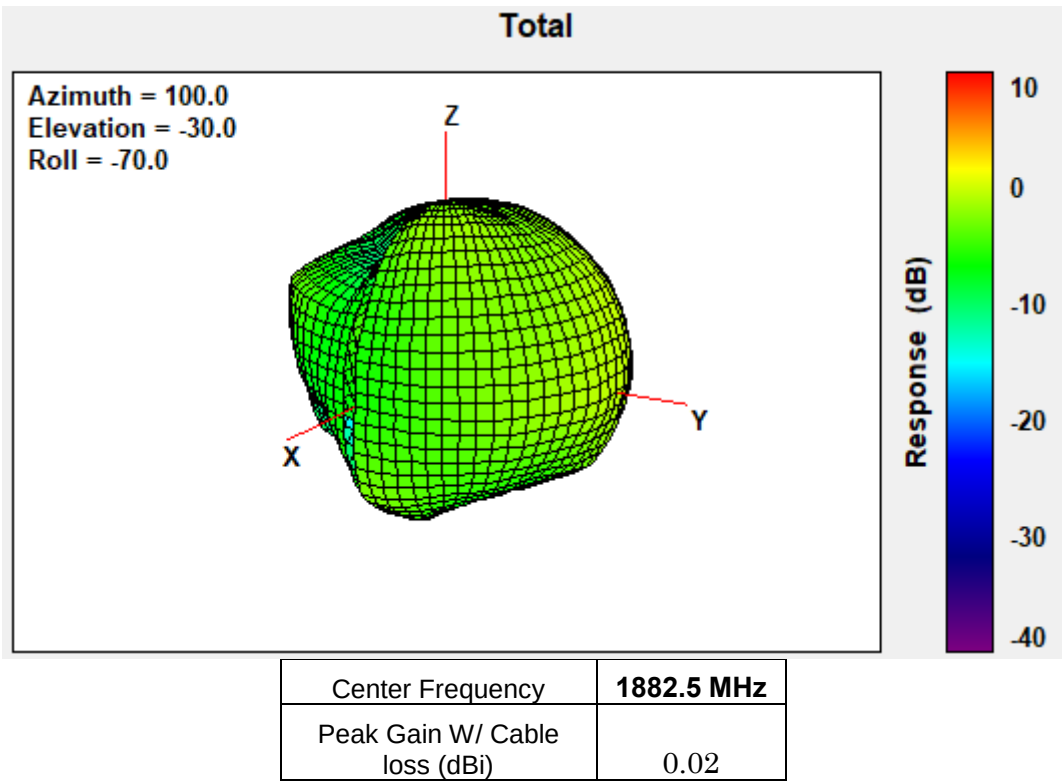


1900MHz

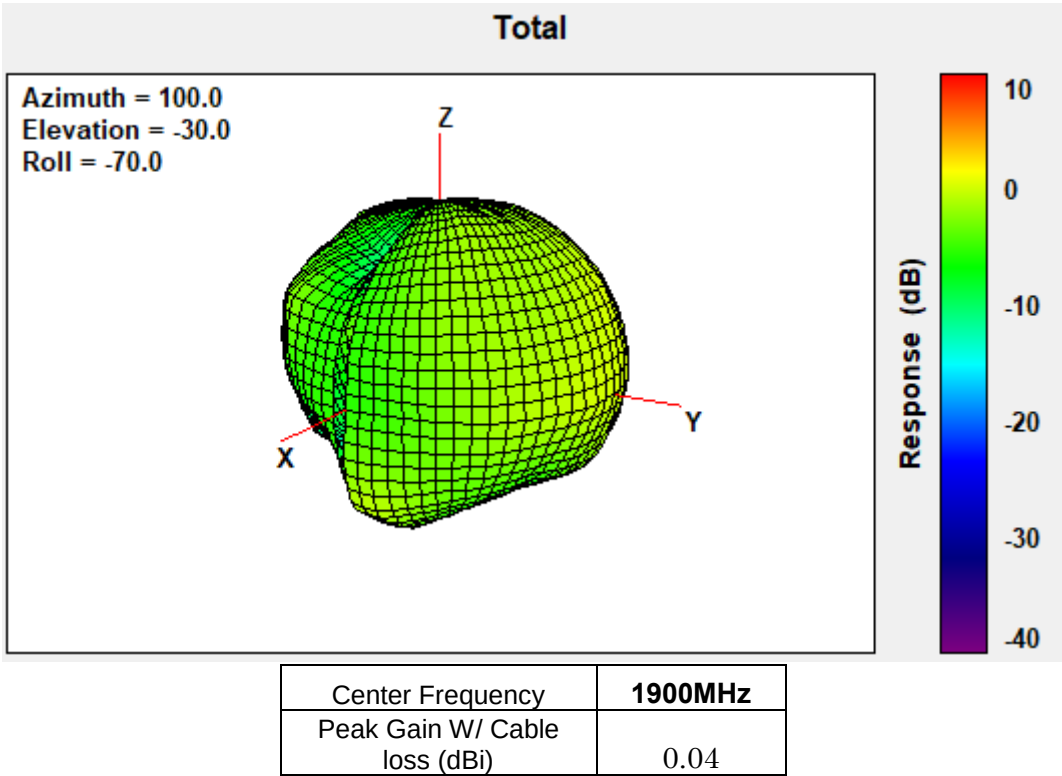


1910MHz

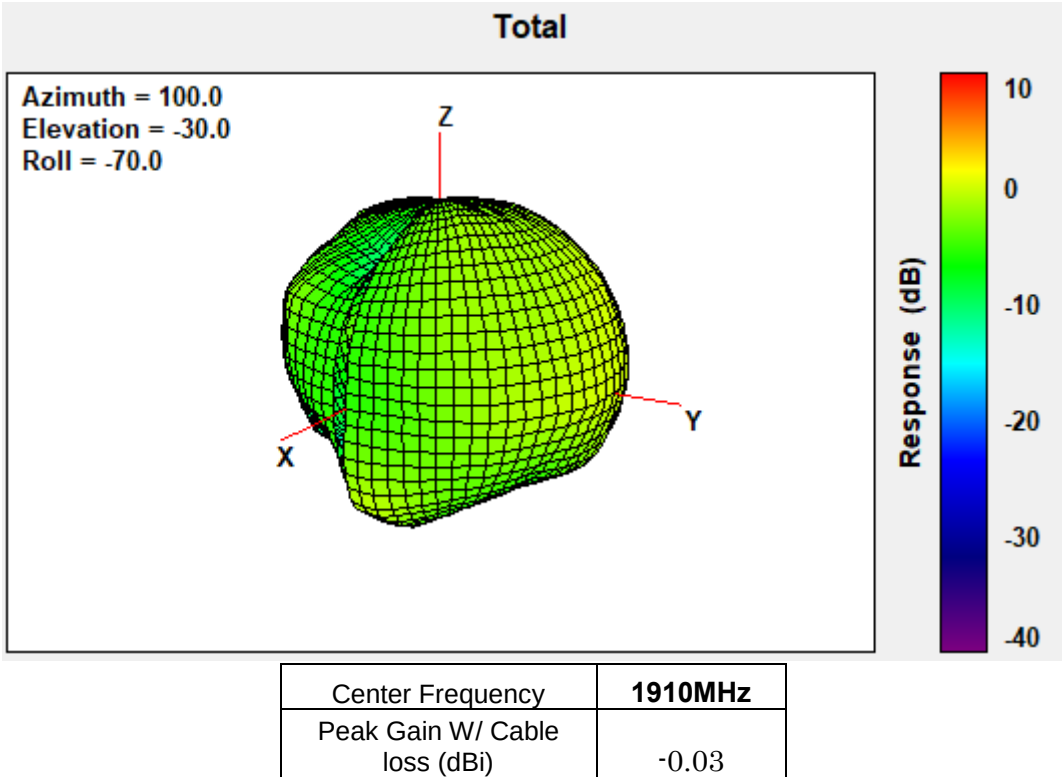


1915MHz

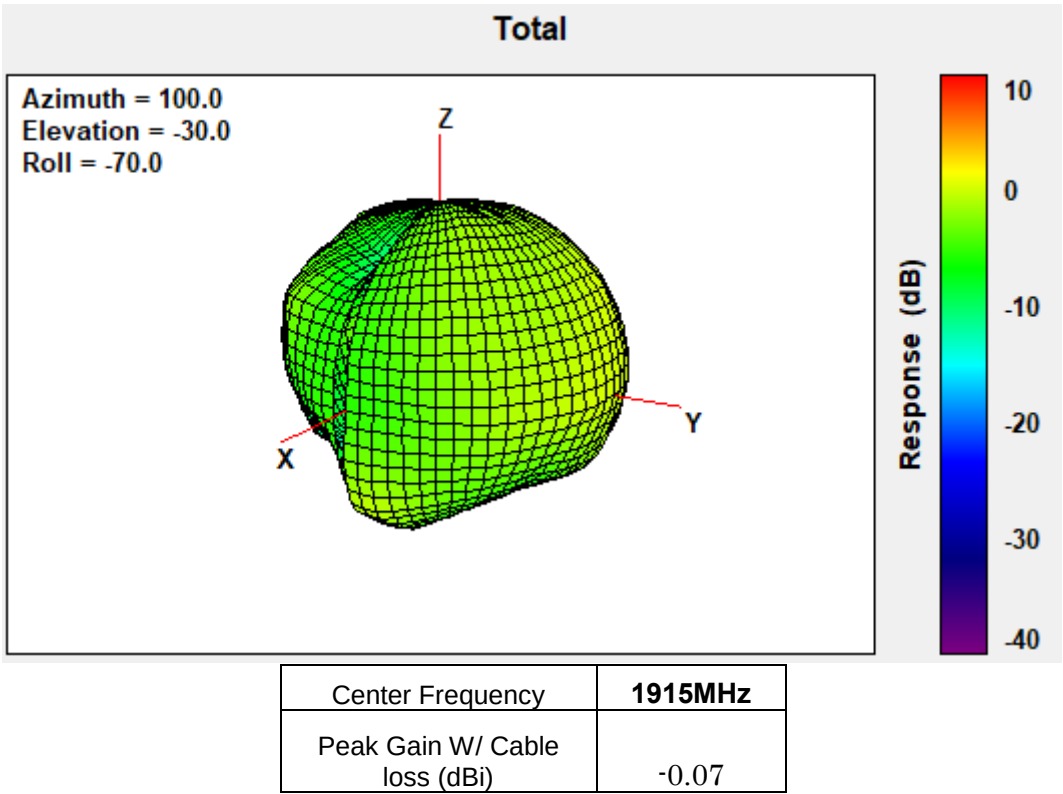


1920MHz

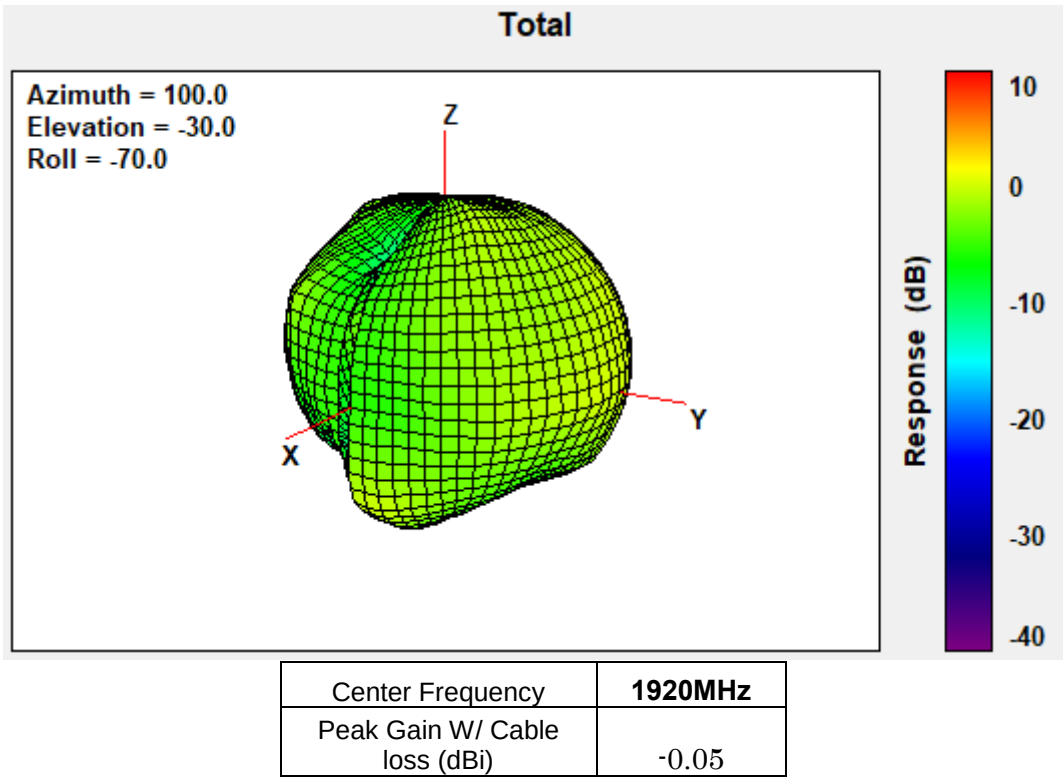


1950MHz

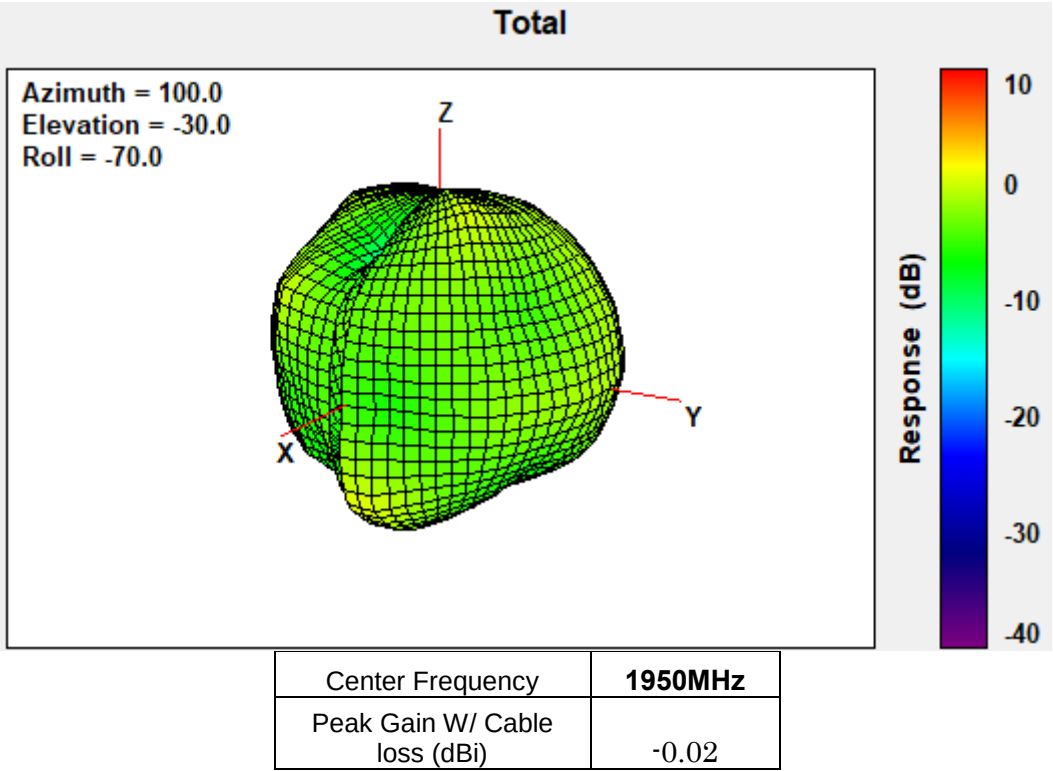

1980MHz

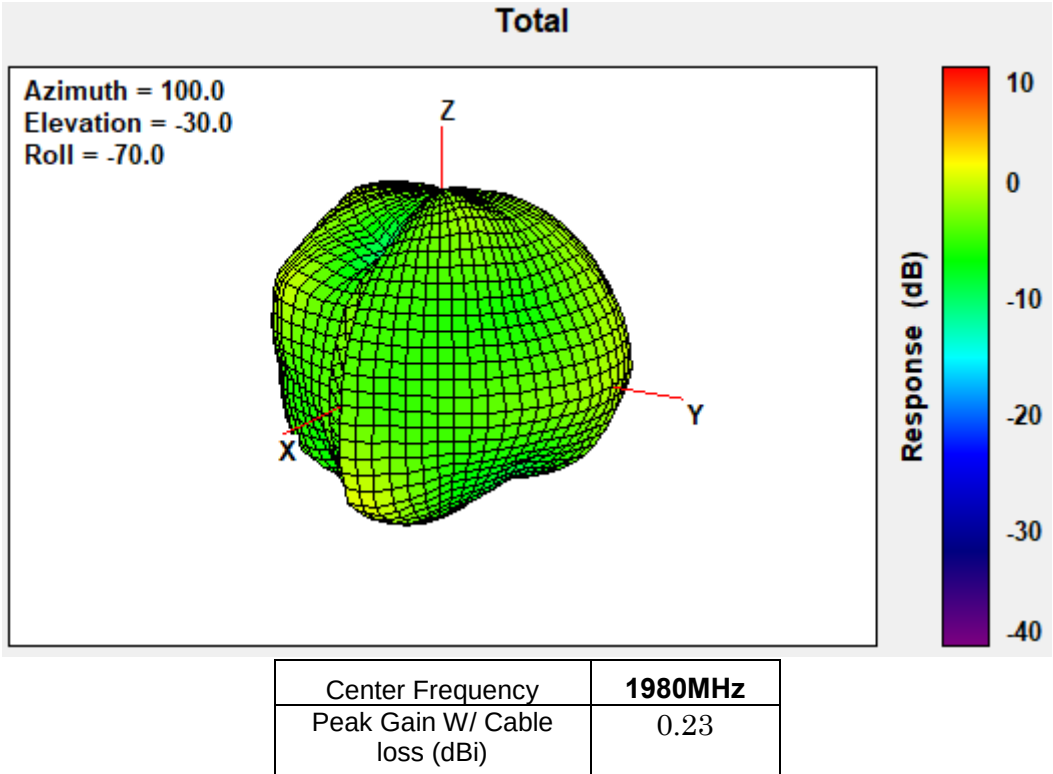


2010MHz

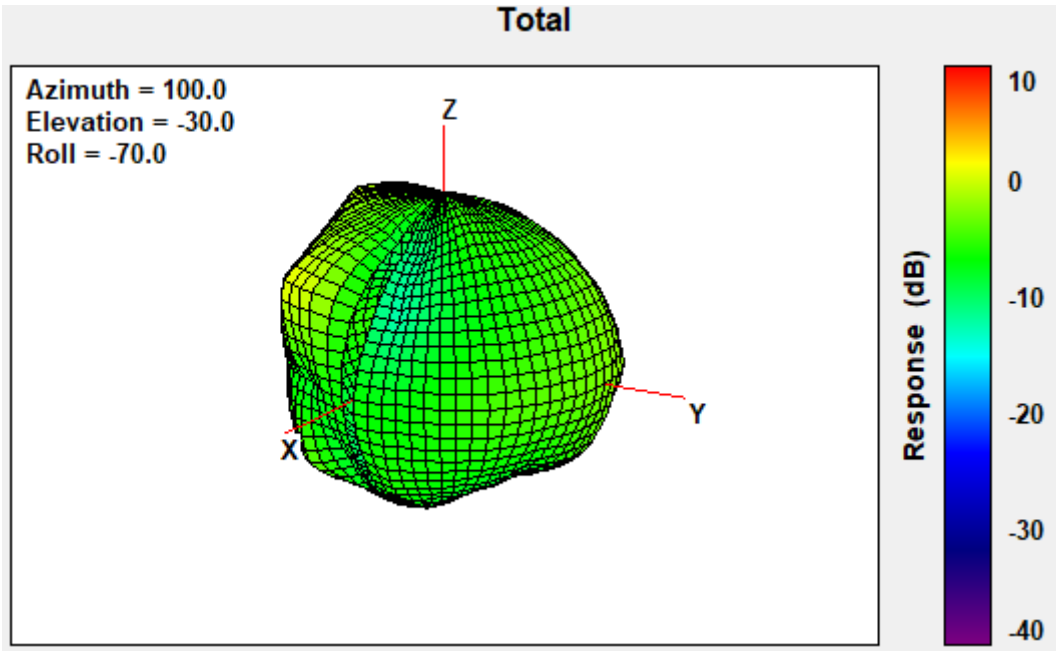


Center Frequency	2010MHz
Peak Gain W/ Cable loss (dBi)	1.09

2017.5MHz

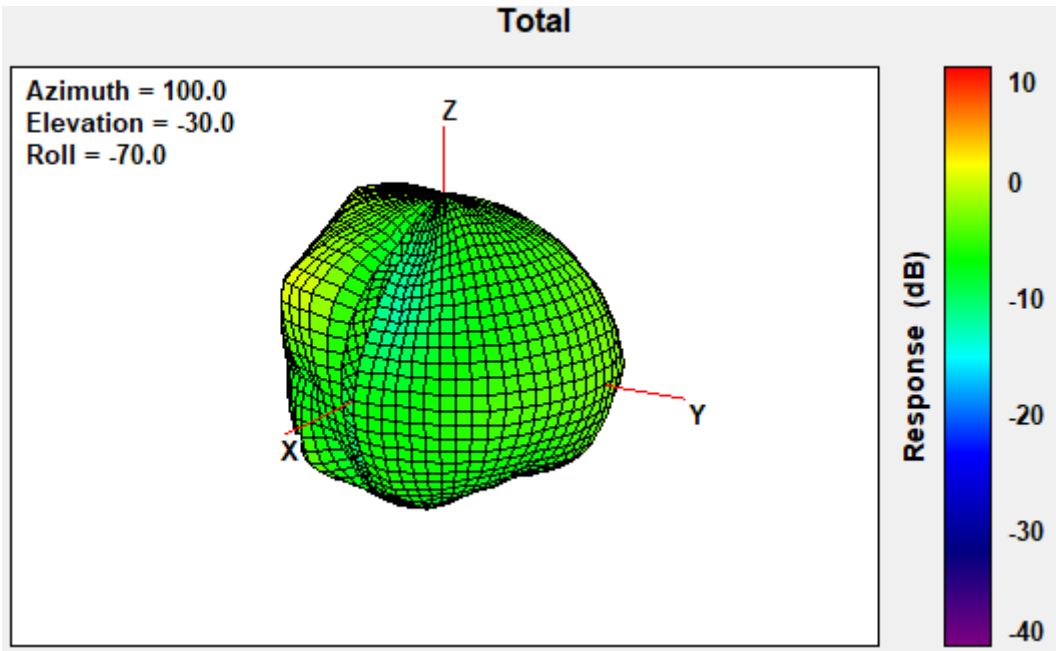


Center Frequency	2017.5MHz
Peak Gain W/ Cable loss (dBi)	1.33

2025MHz

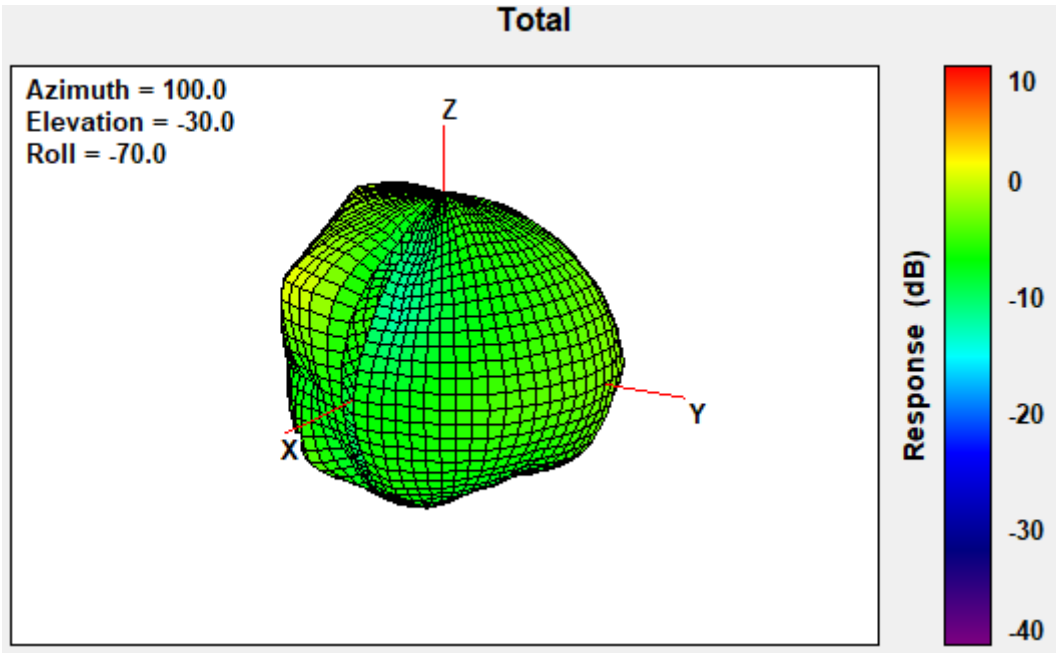


Center Frequency	2025MHz
Peak Gain W/ Cable loss (dBi)	1.36

2300MHz

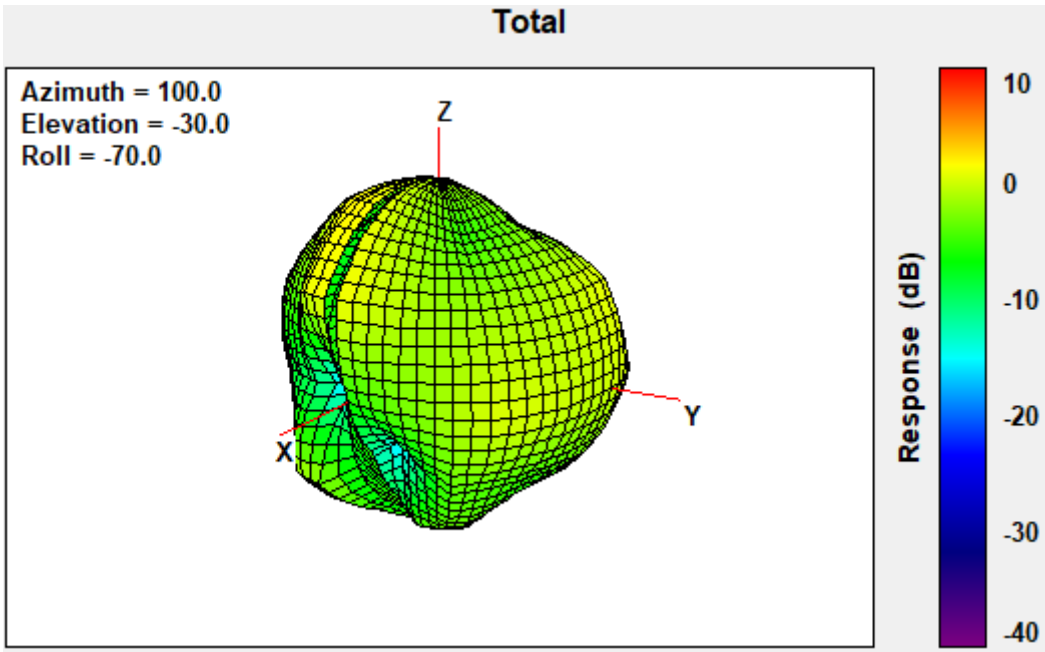


Center Frequency	2300MHz
Peak Gain W/ Cable loss (dBi)	0.53

2305MHz

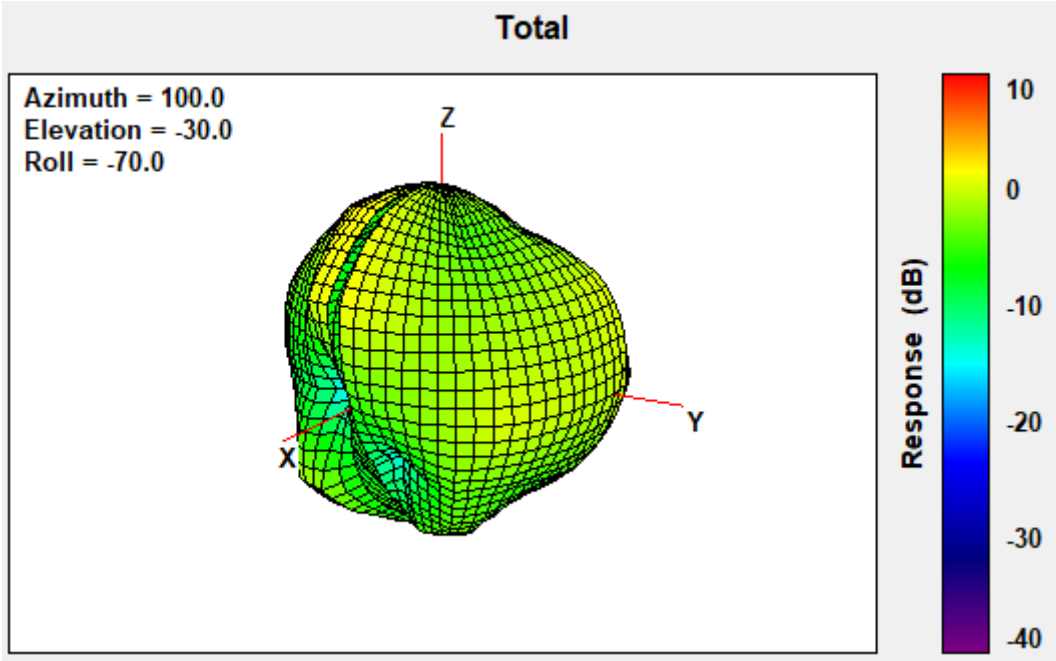


Center Frequency	2305MHz
Peak Gain W/ Cable loss (dBi)	0.52

2310MHz

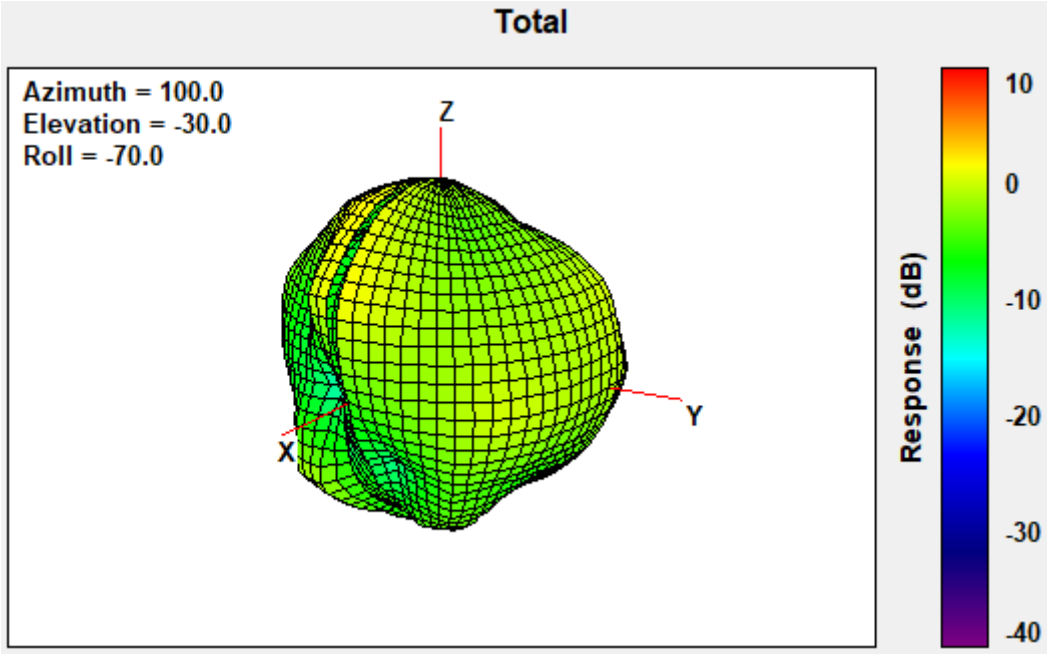




Center Frequency	2310MHz
Peak Gain W/ Cable loss (dBi)	0.54



2315MHz


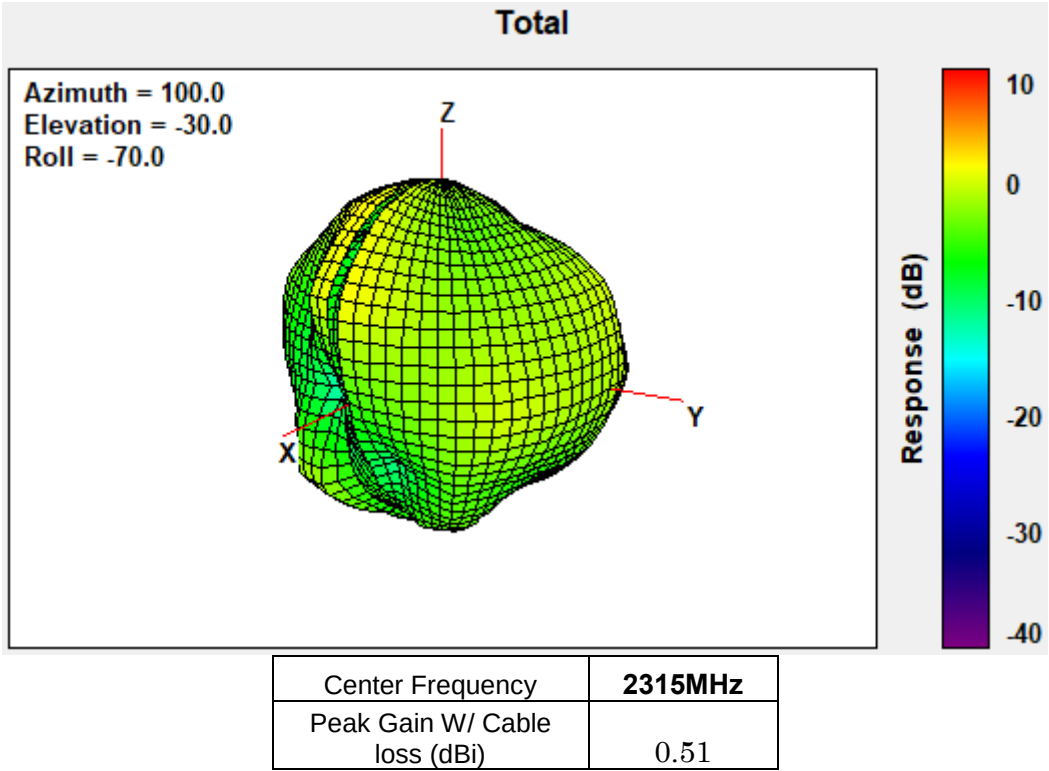


2350MHz

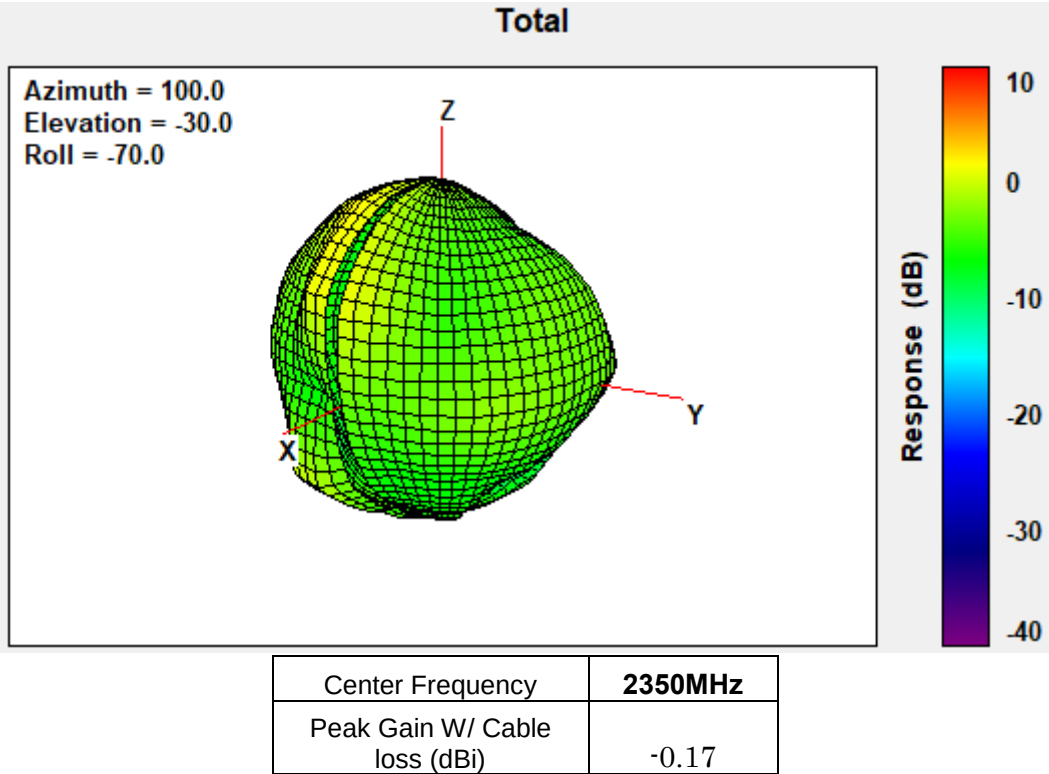


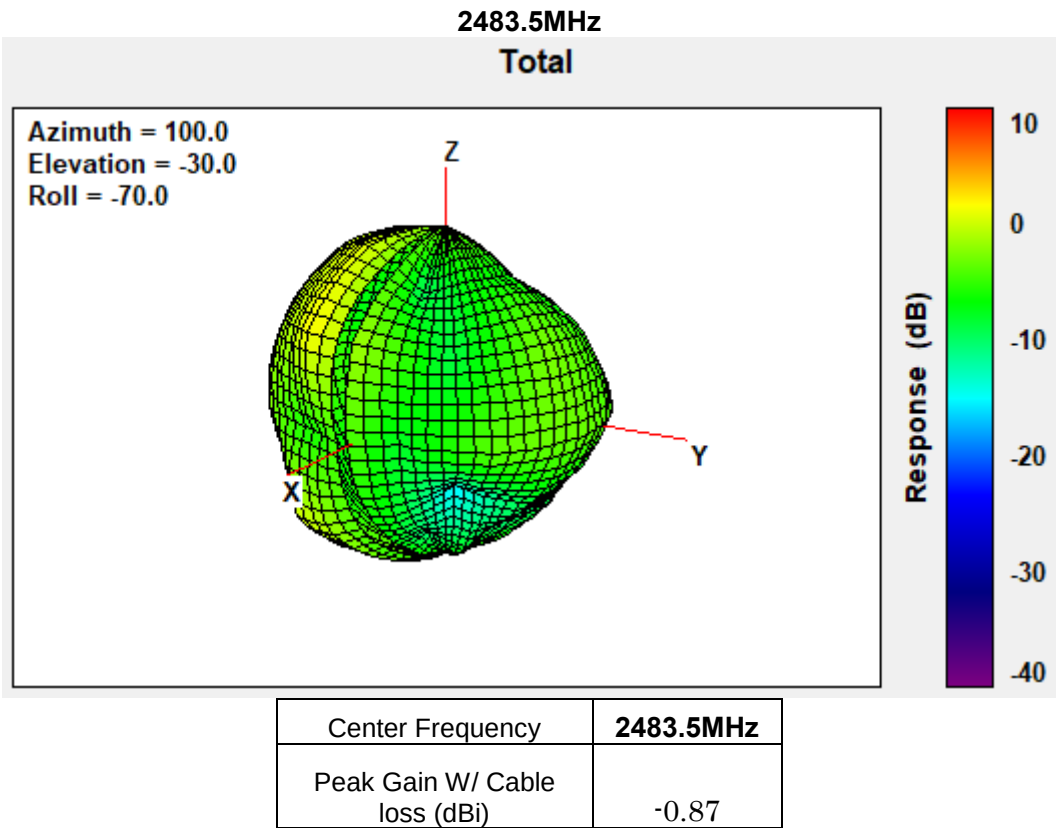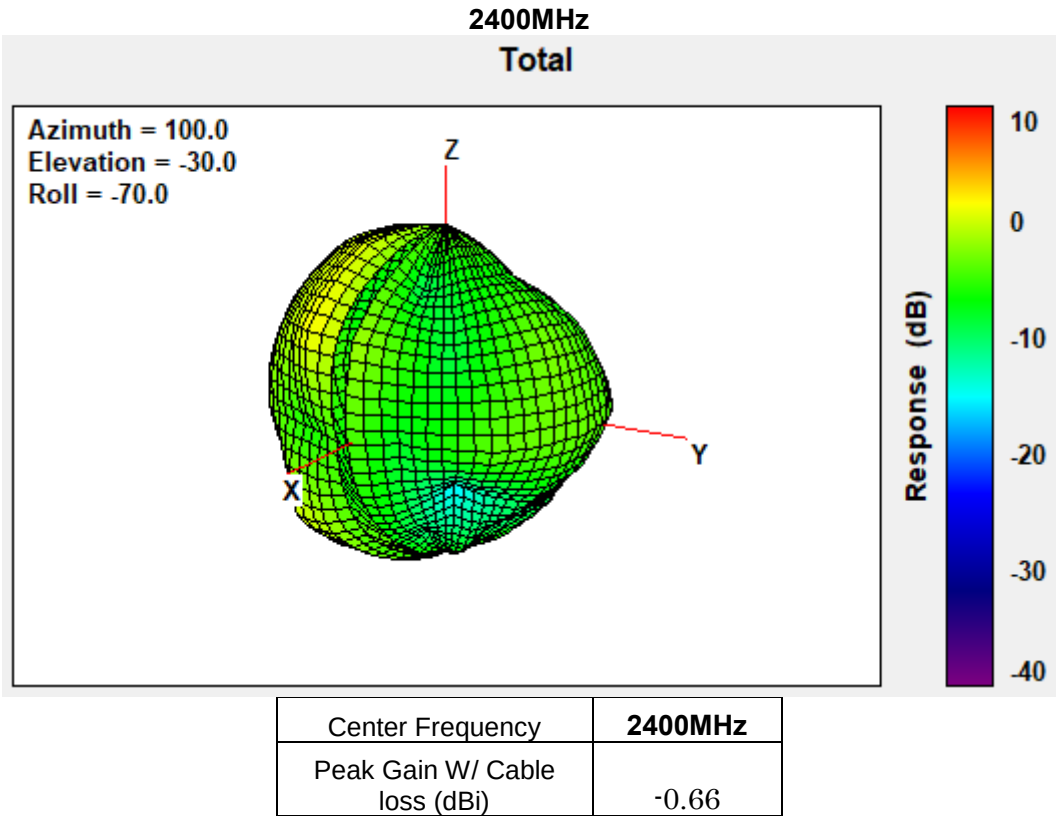

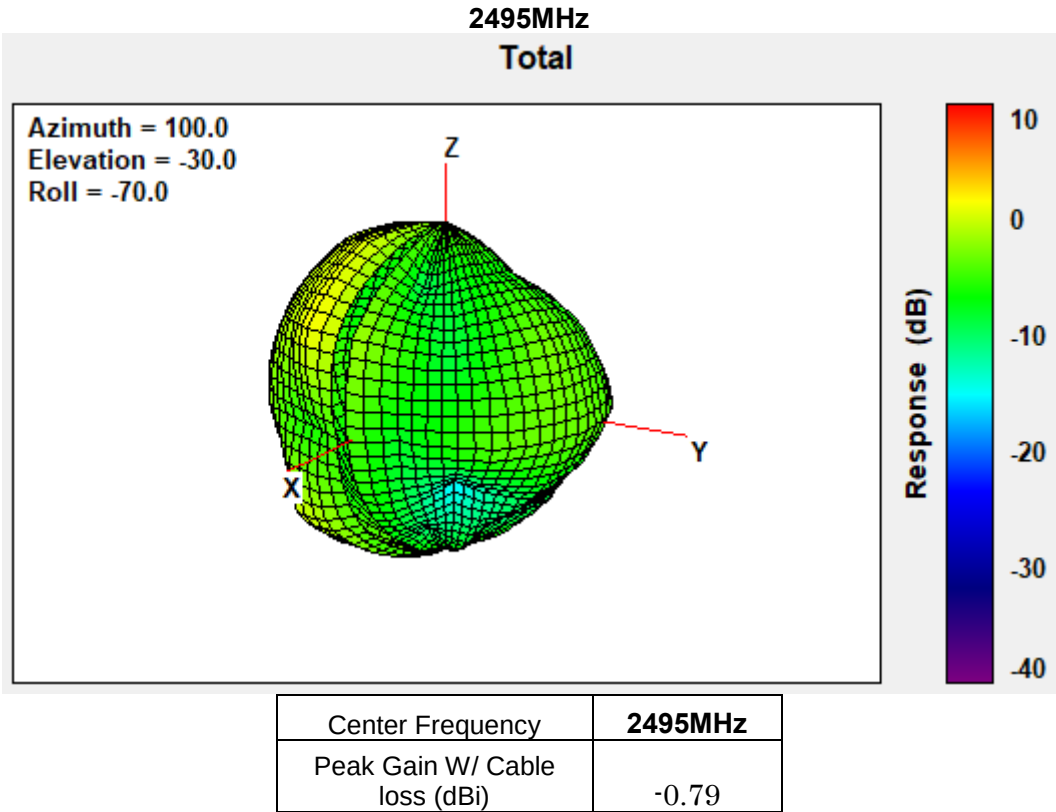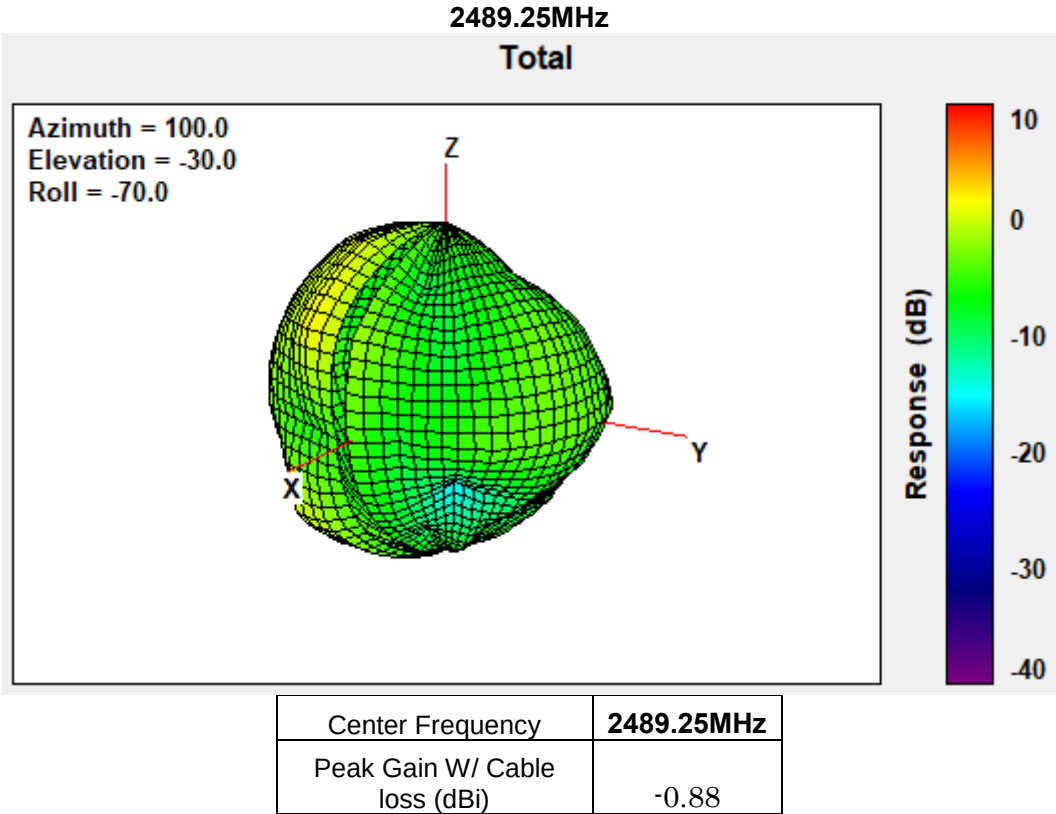


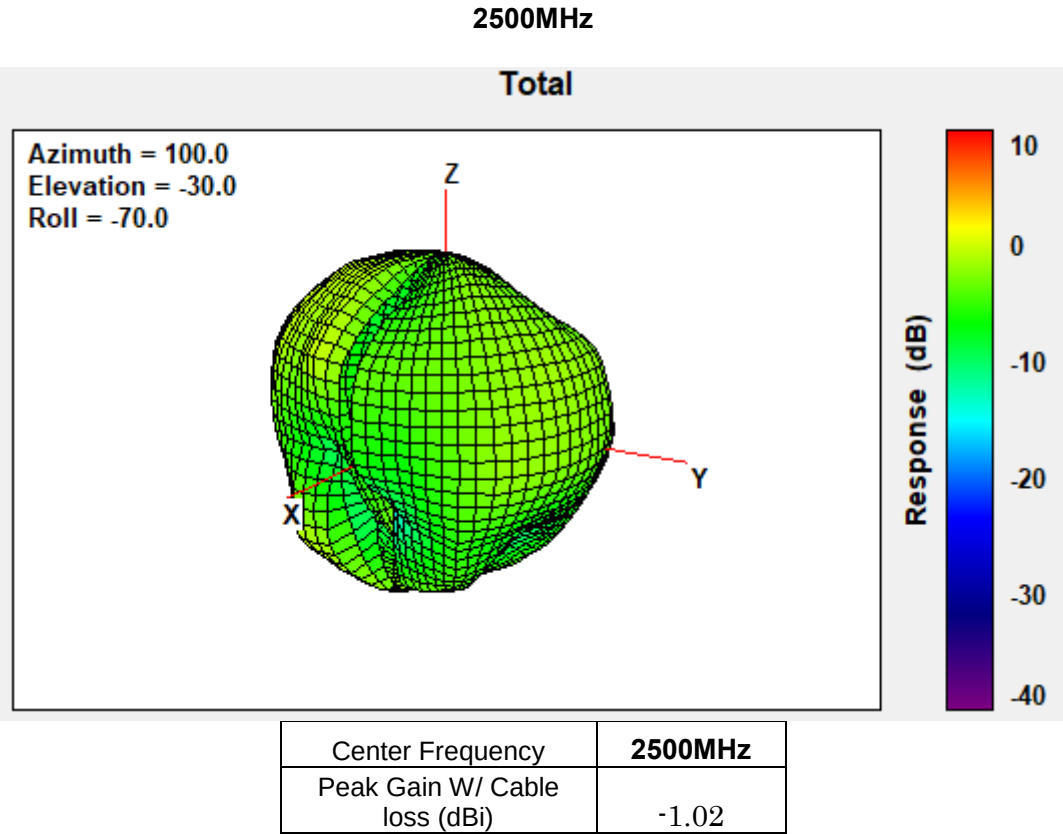
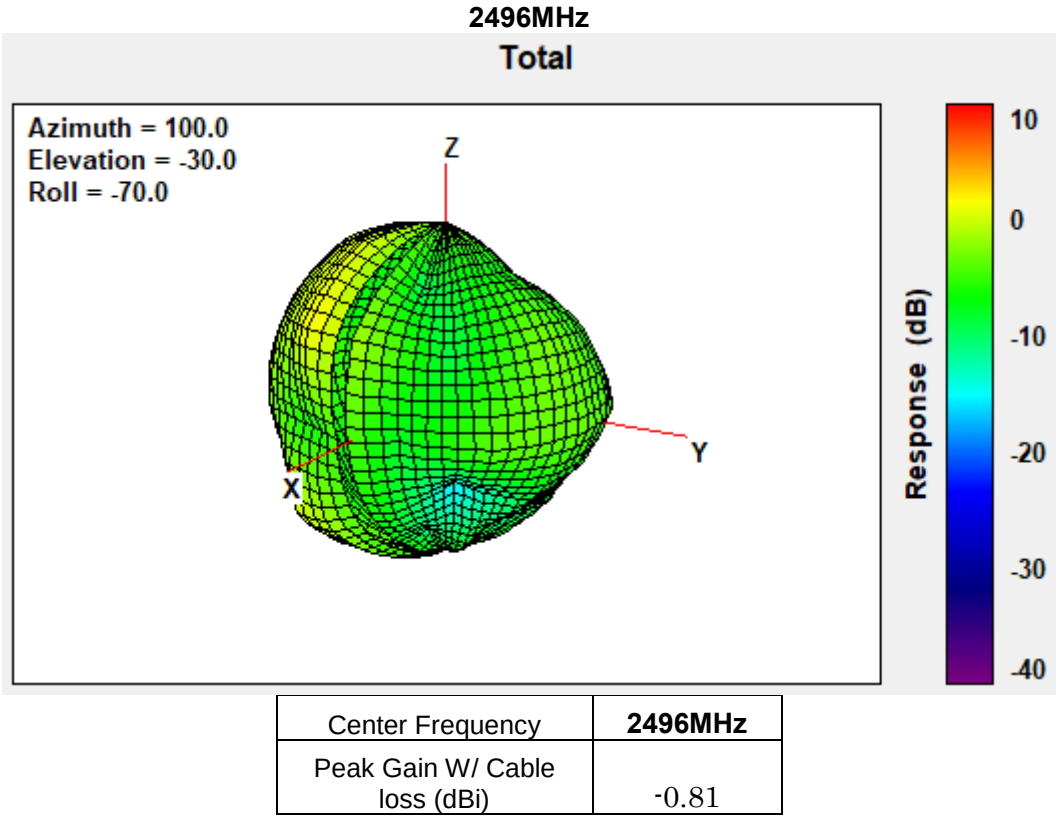




2535MHz

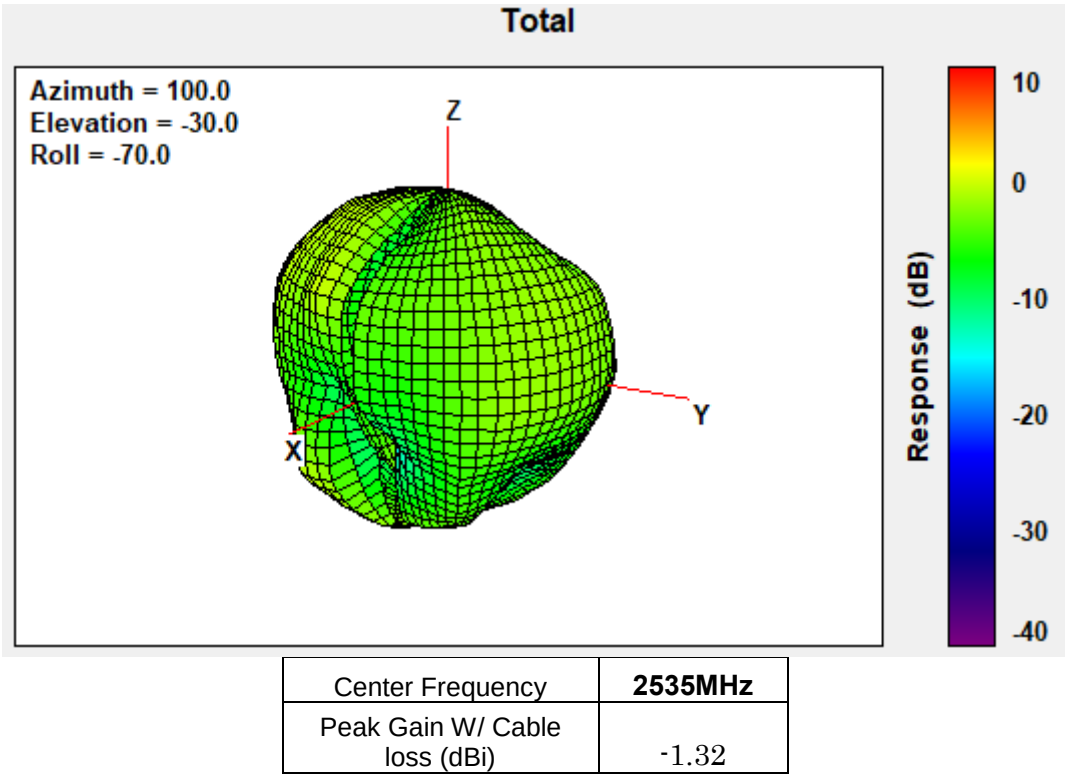


2570MHz

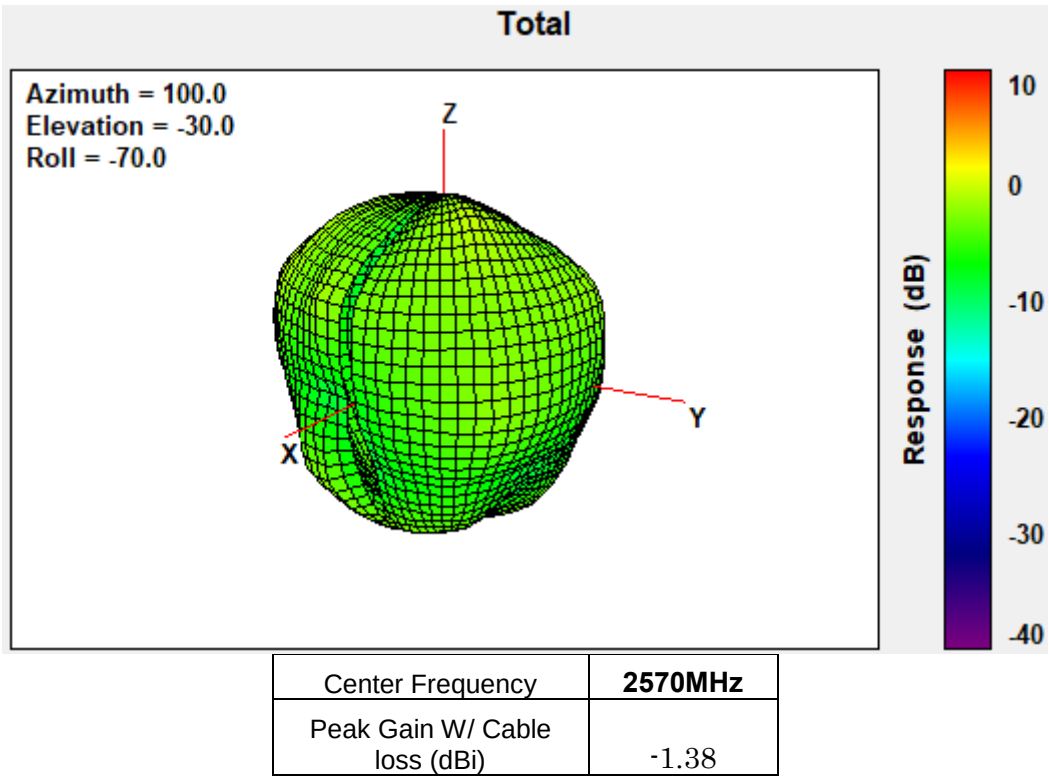

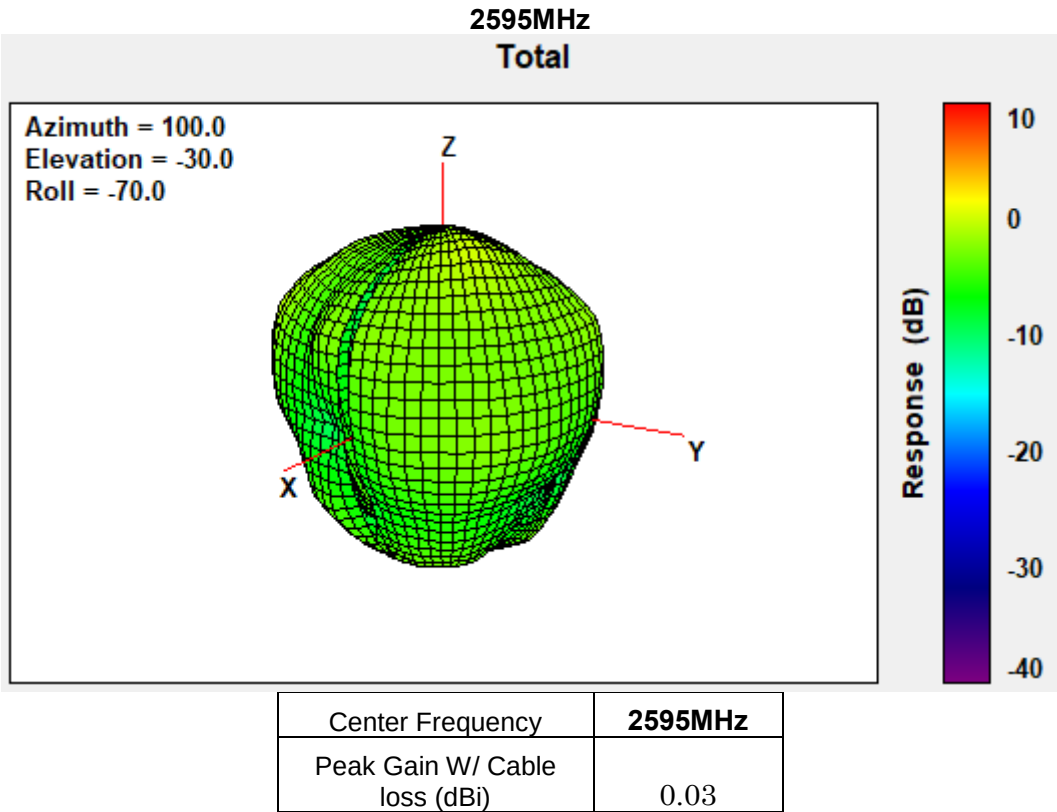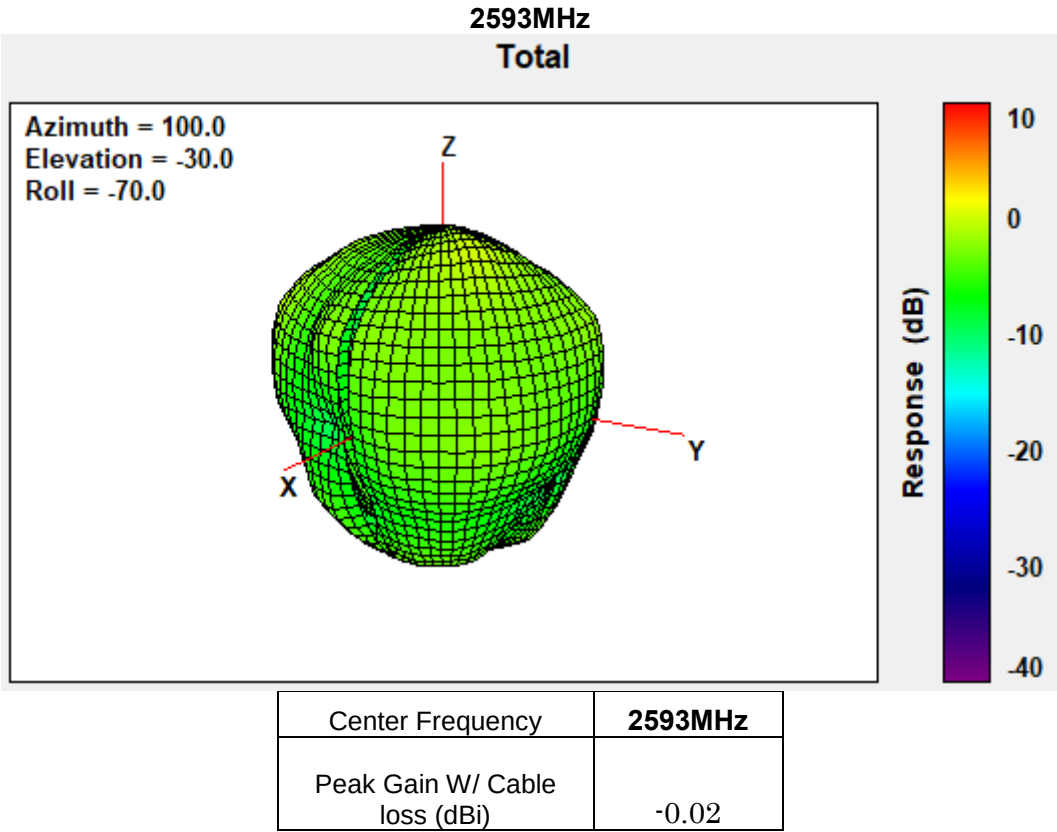


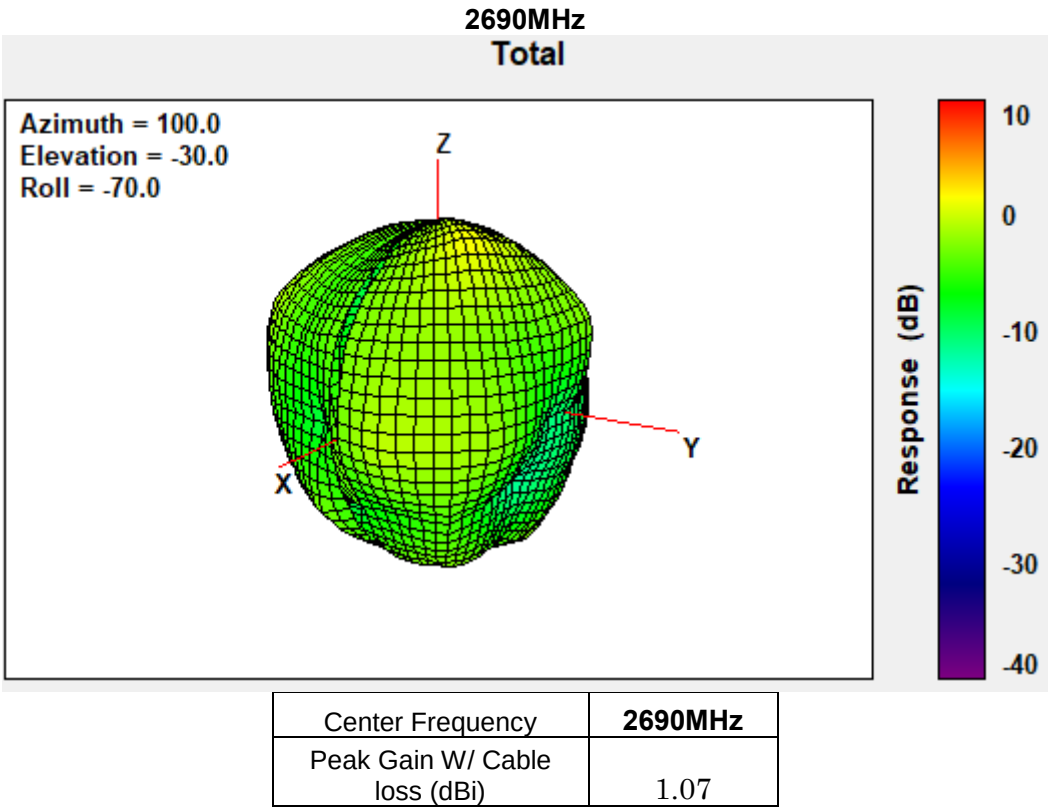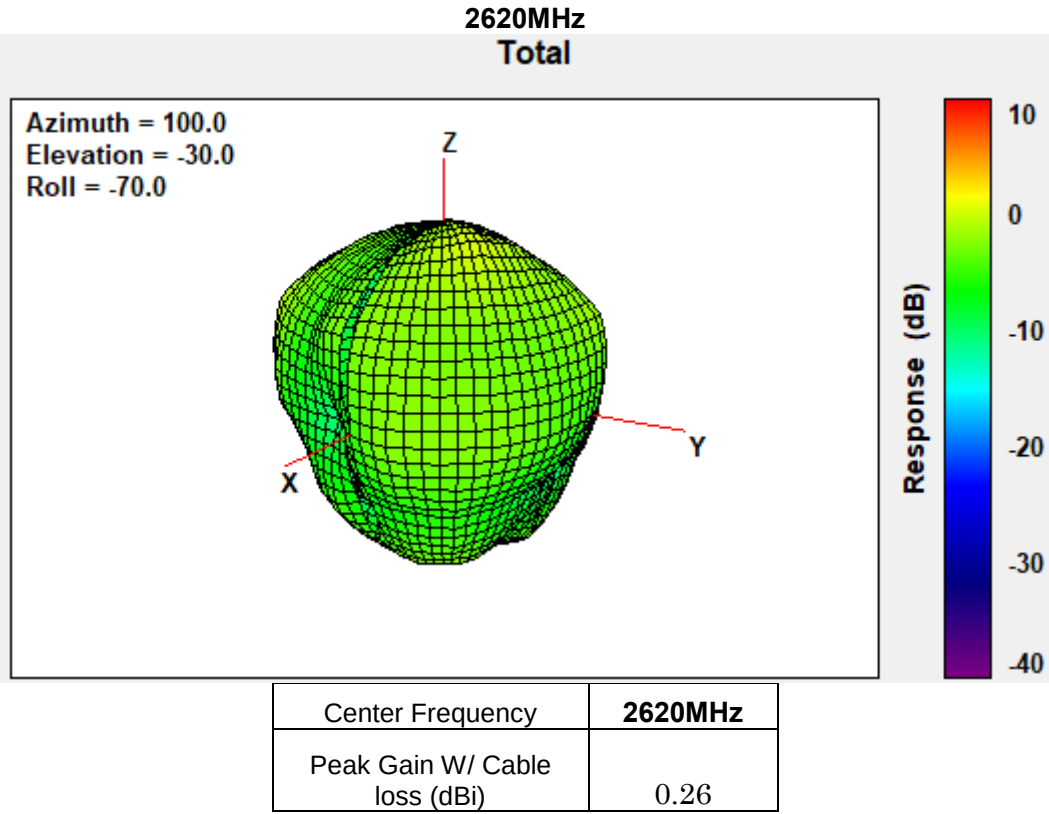


3300MHz

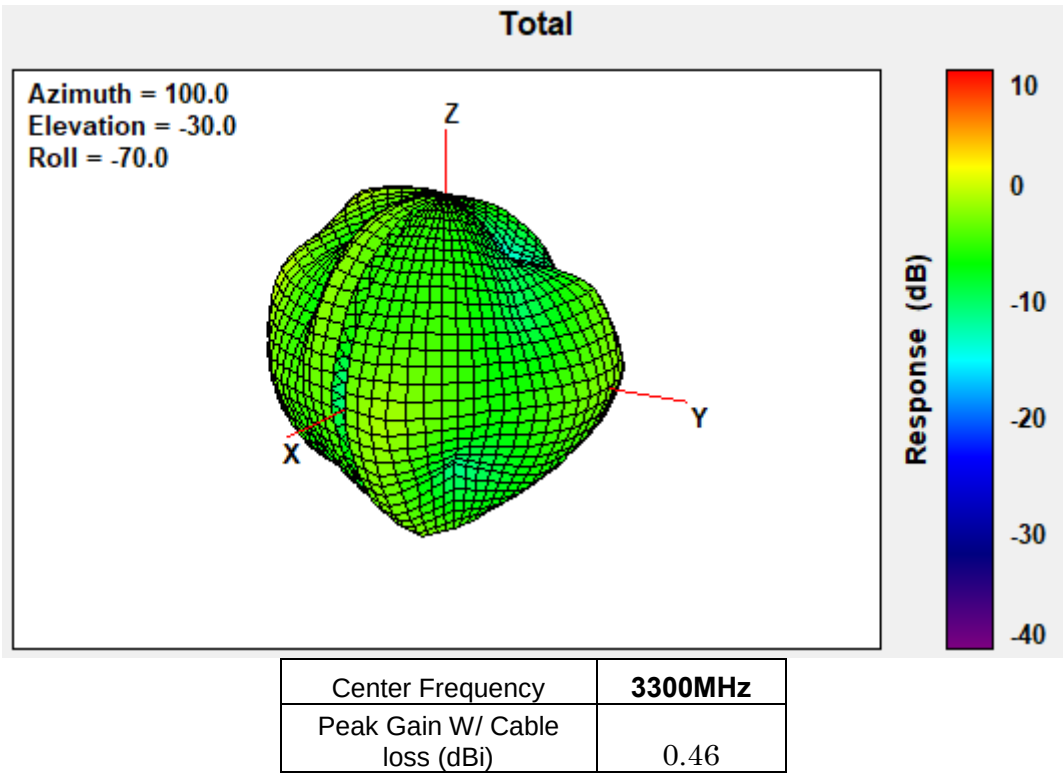


3400MHz

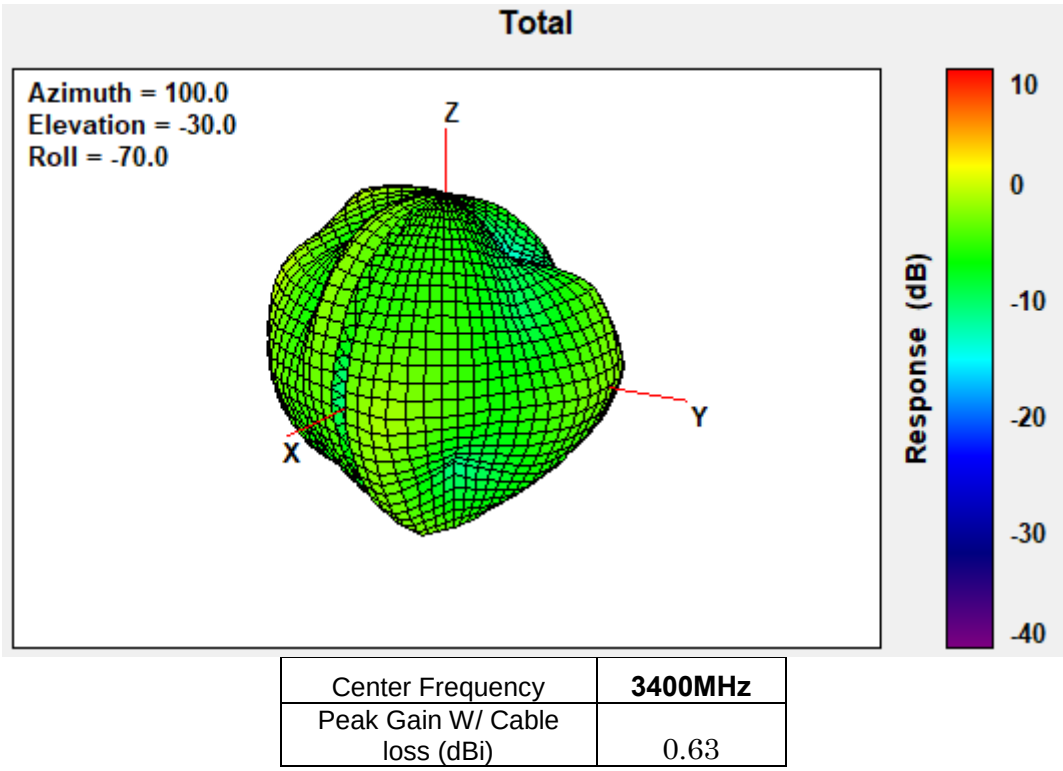


3500MHz

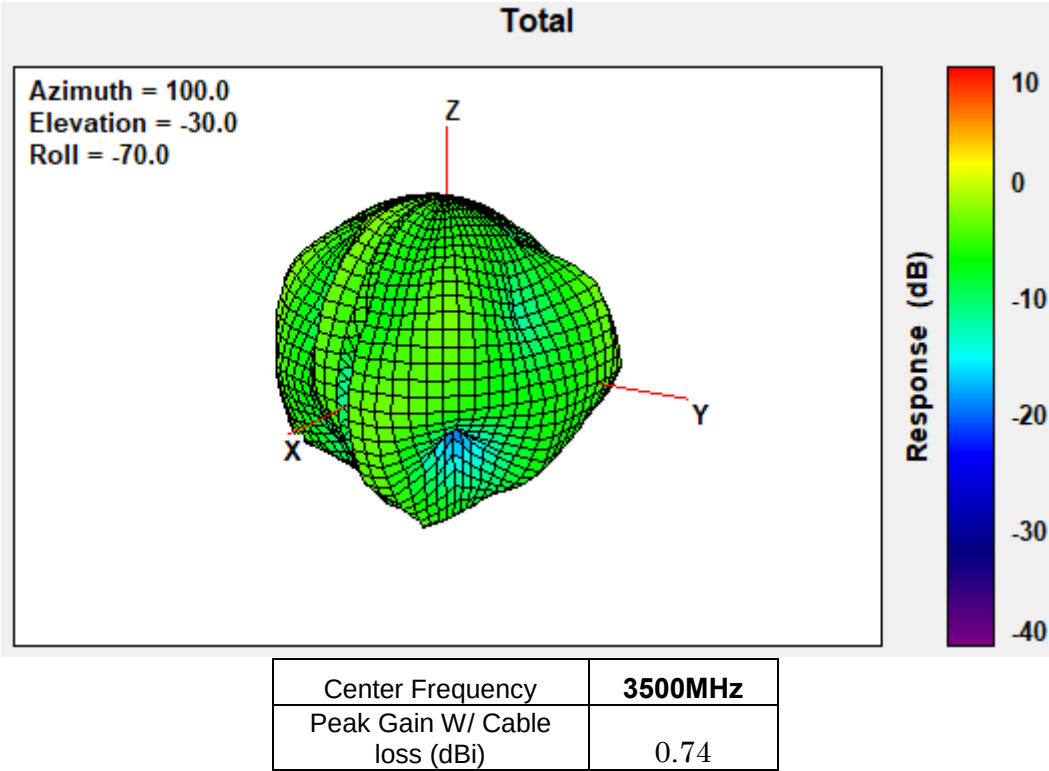


3550MHz

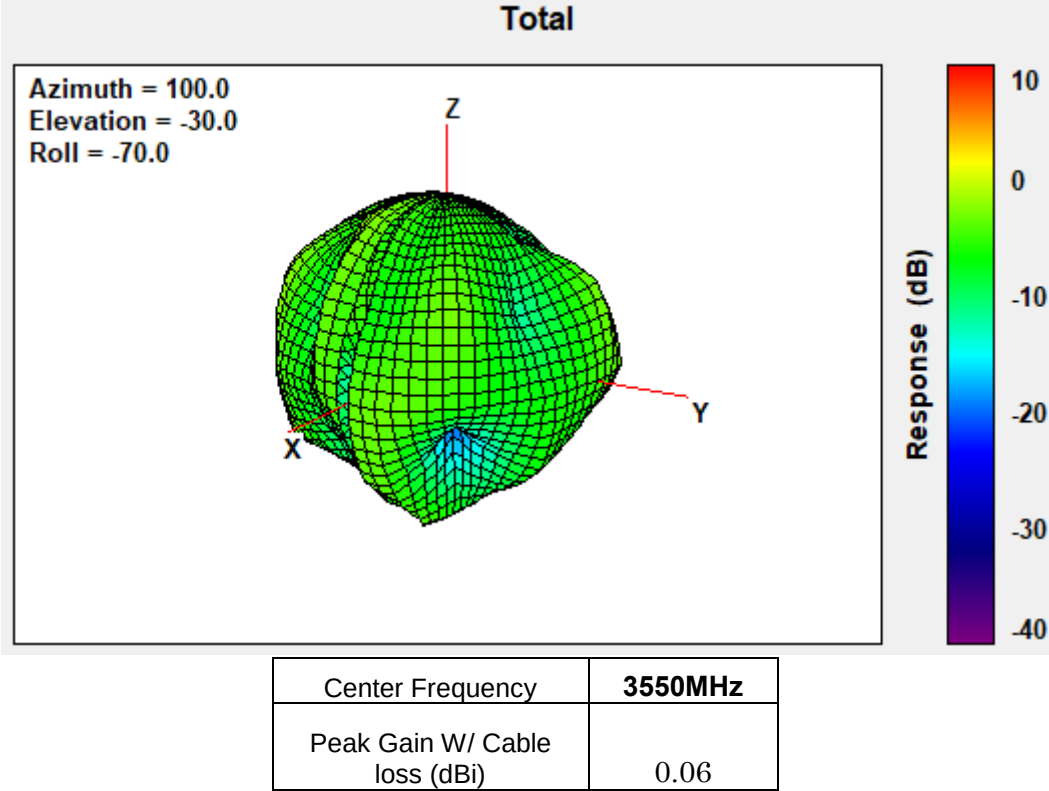


3600MHz

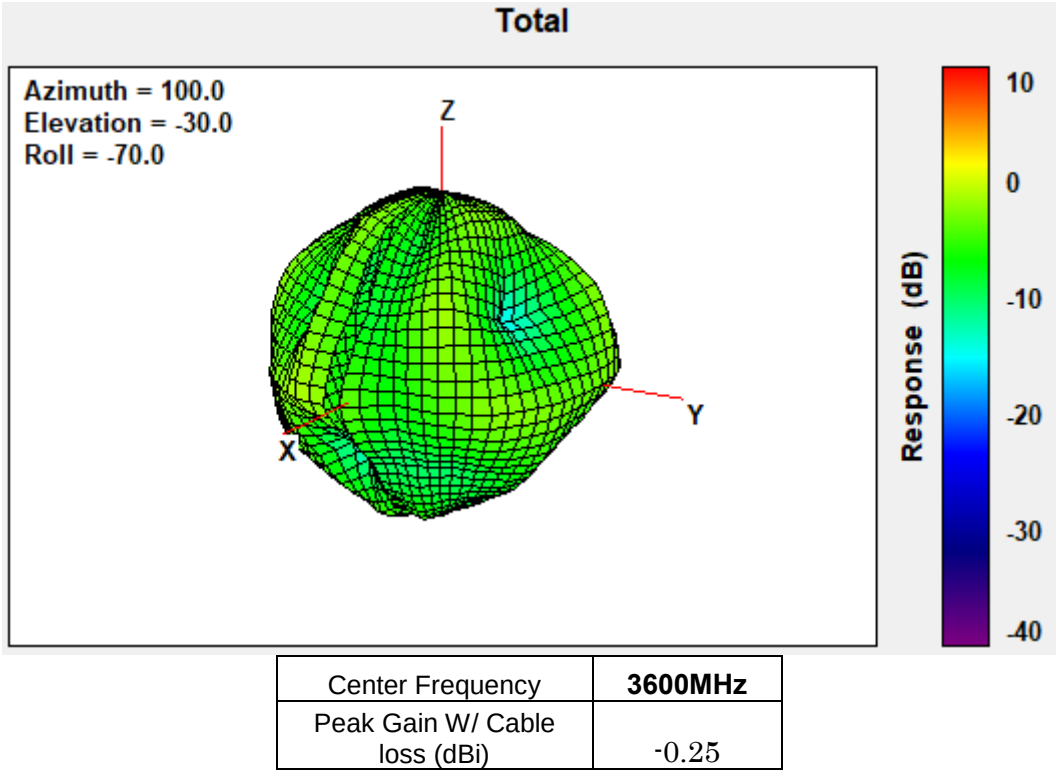


3625MHz

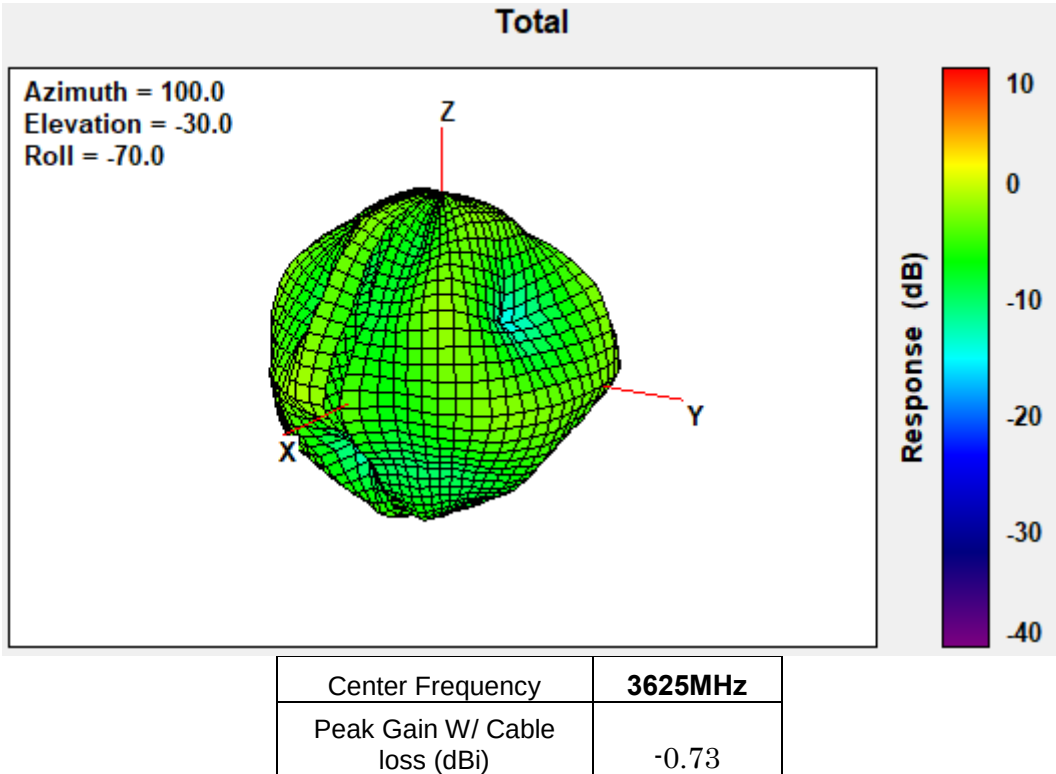


3700MHz

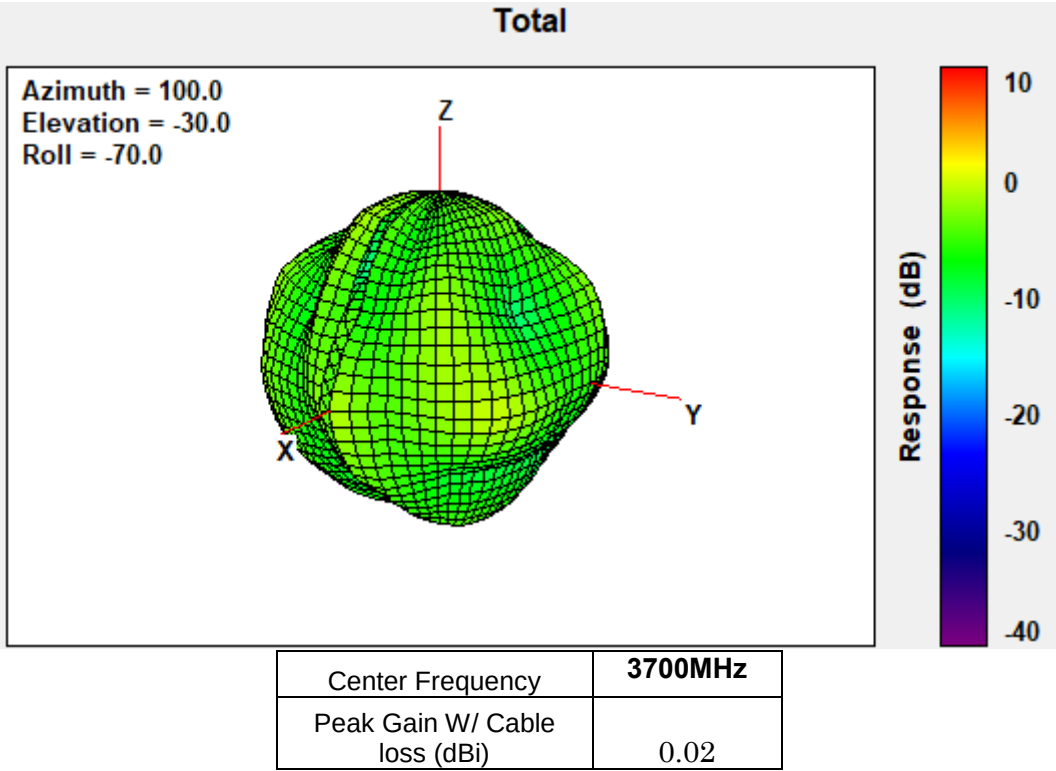


3750MHz

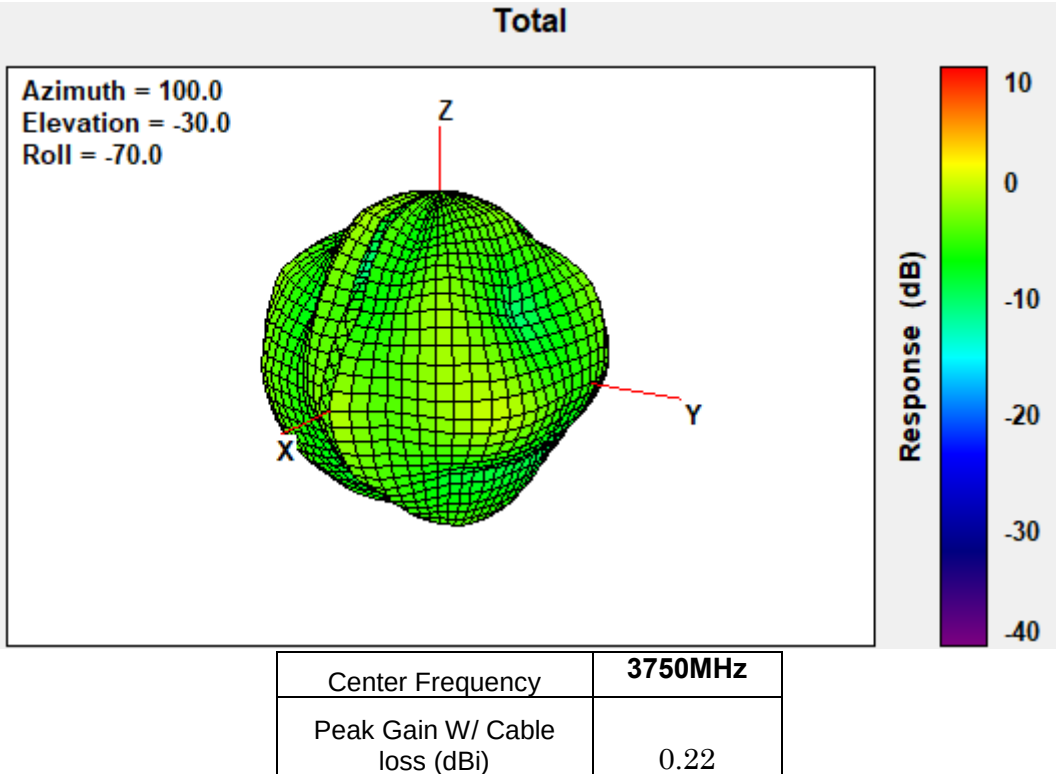


3800MHz

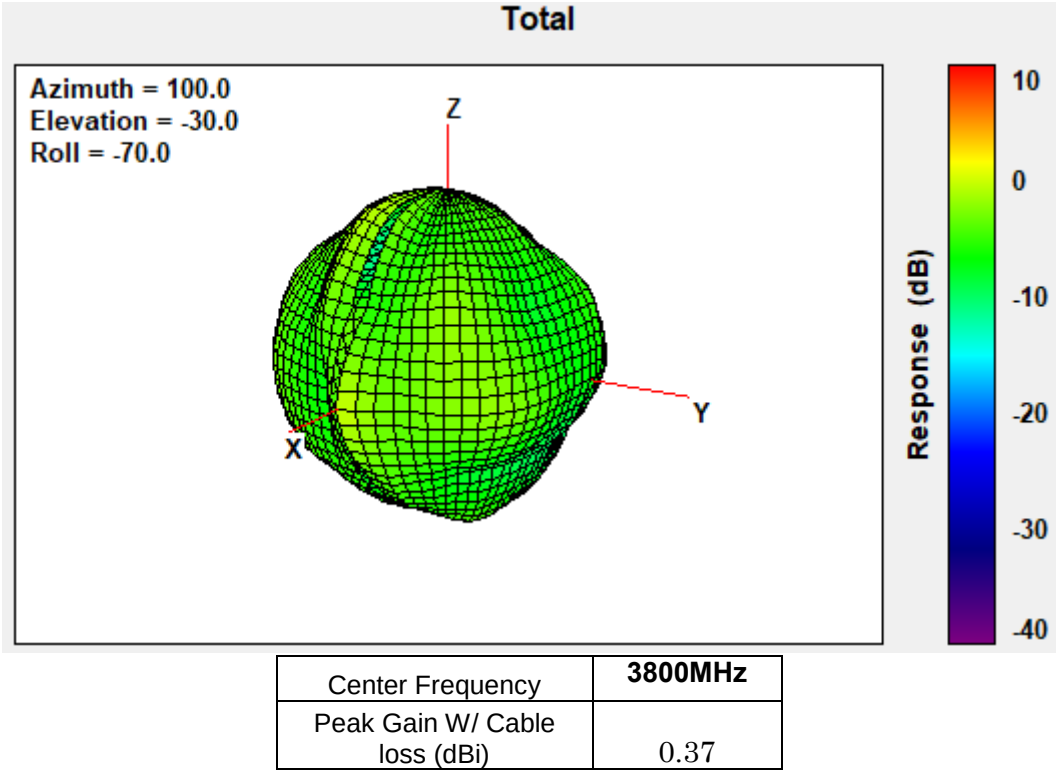


4200MHz

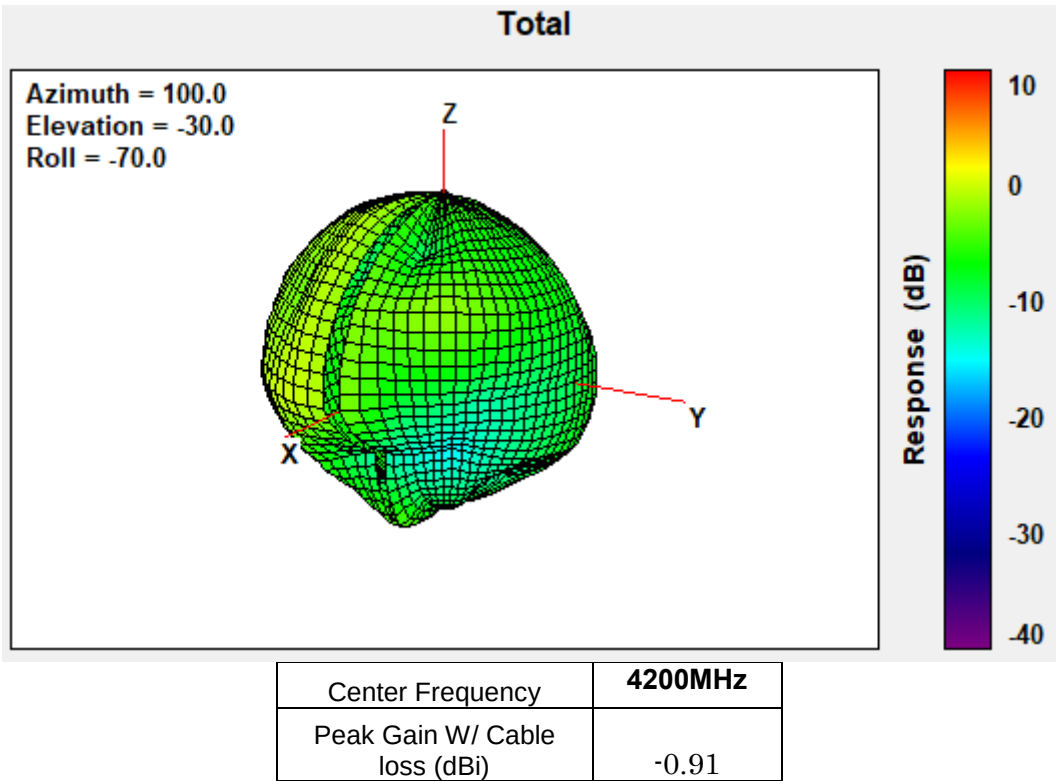


4400MHz

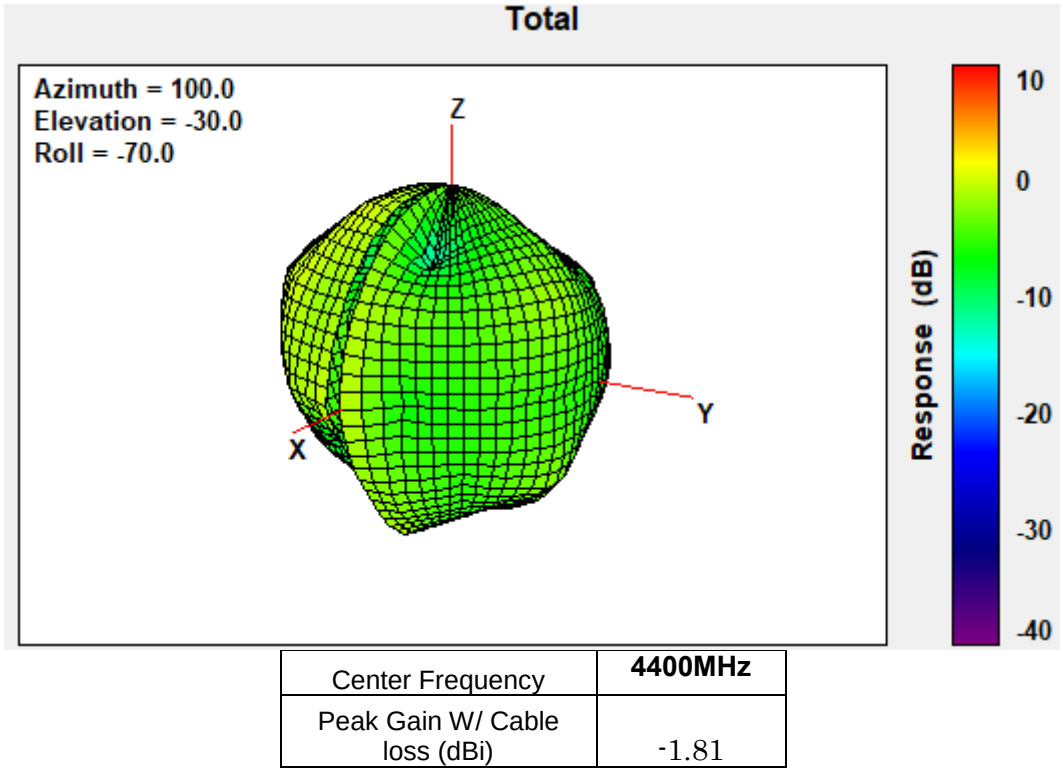

4700MHz

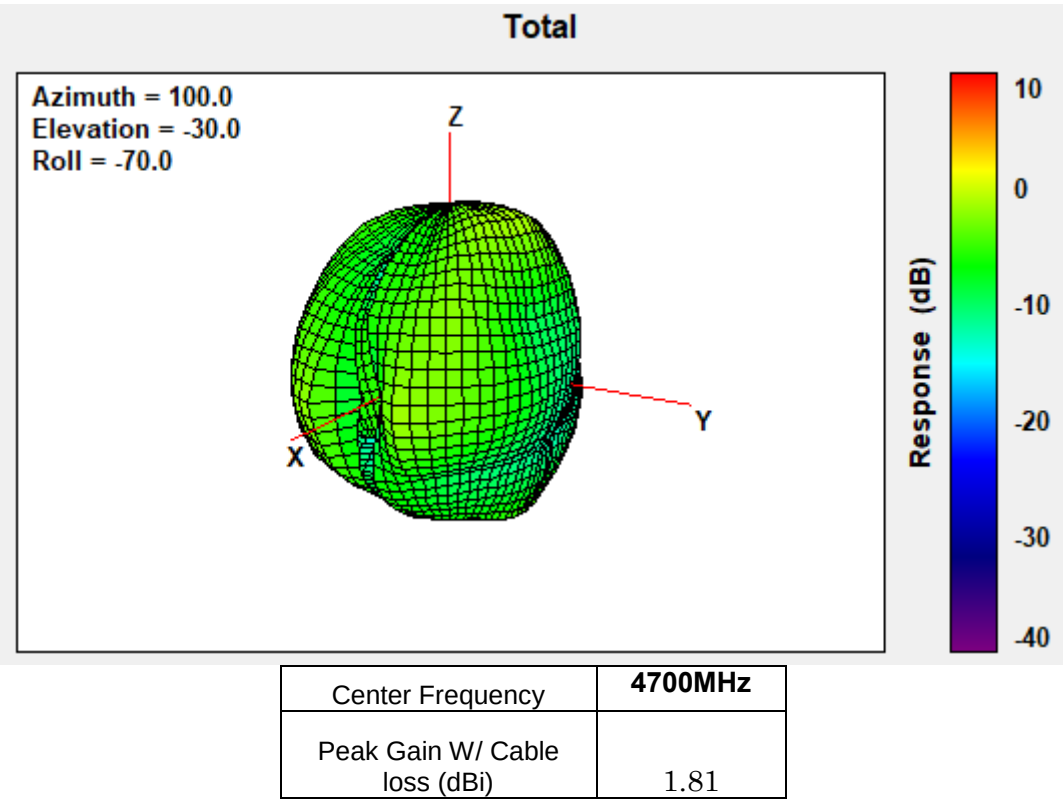


5000MHz

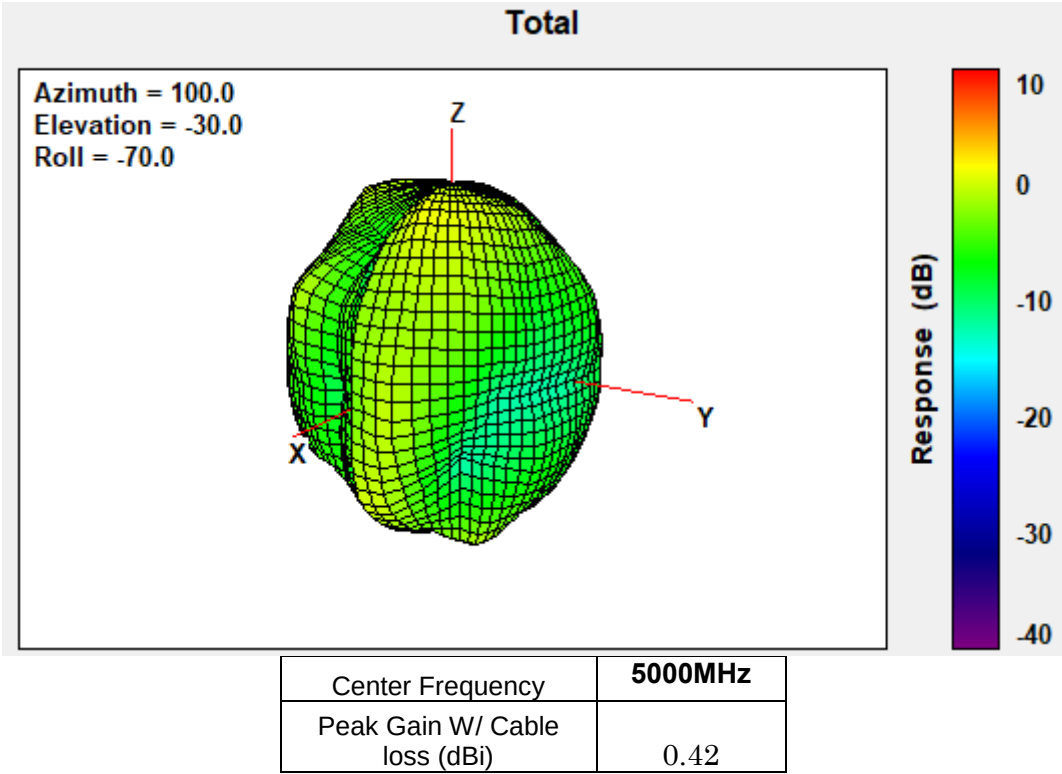

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

<NB mode>

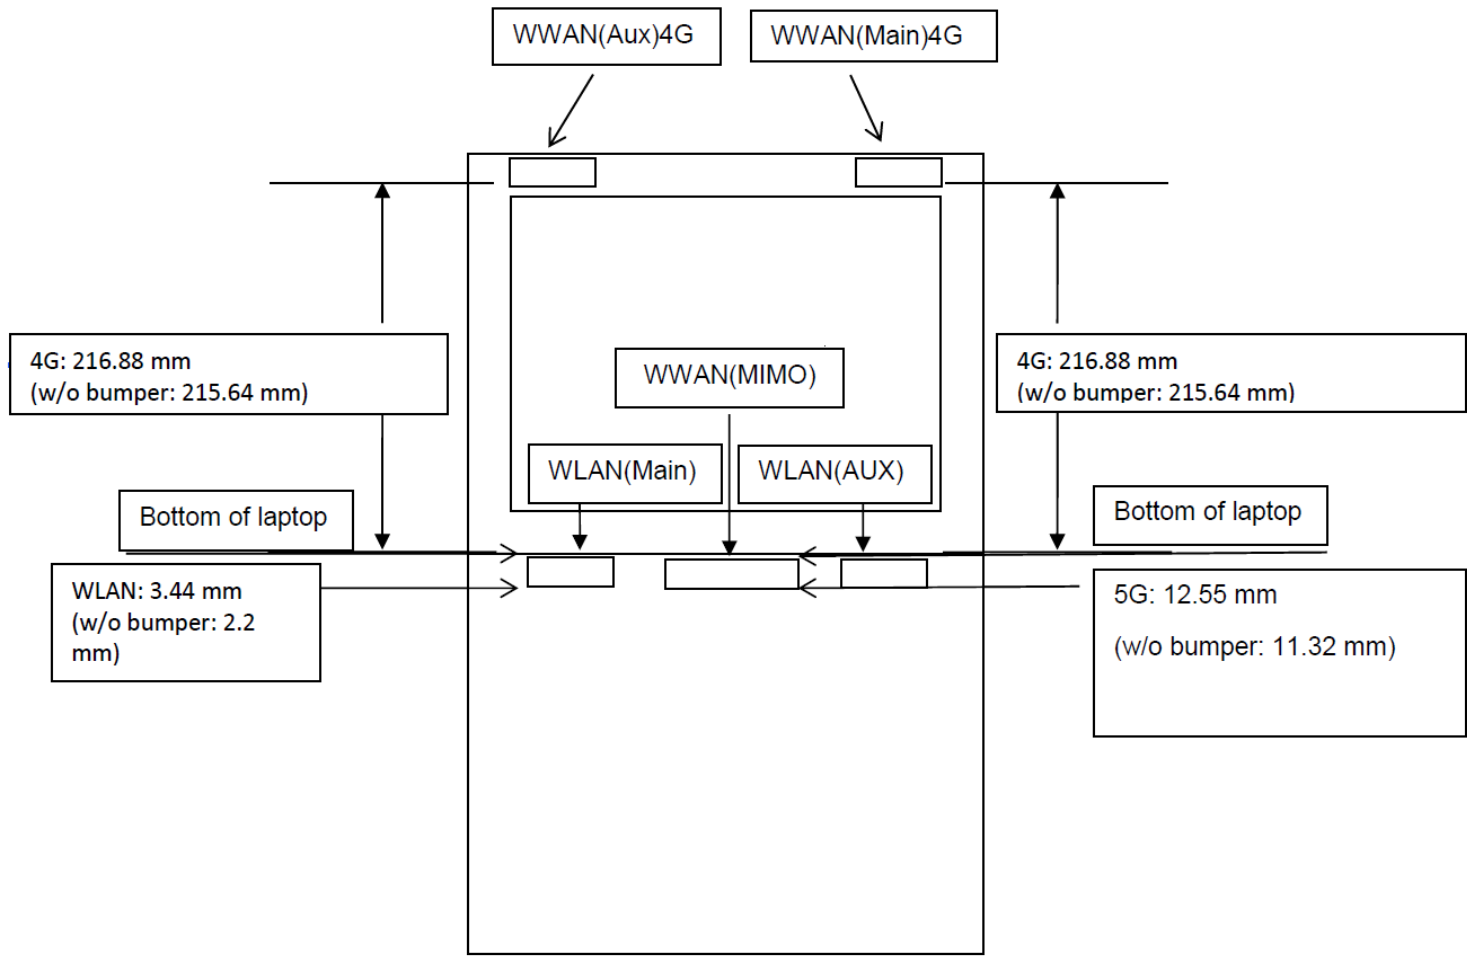

Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

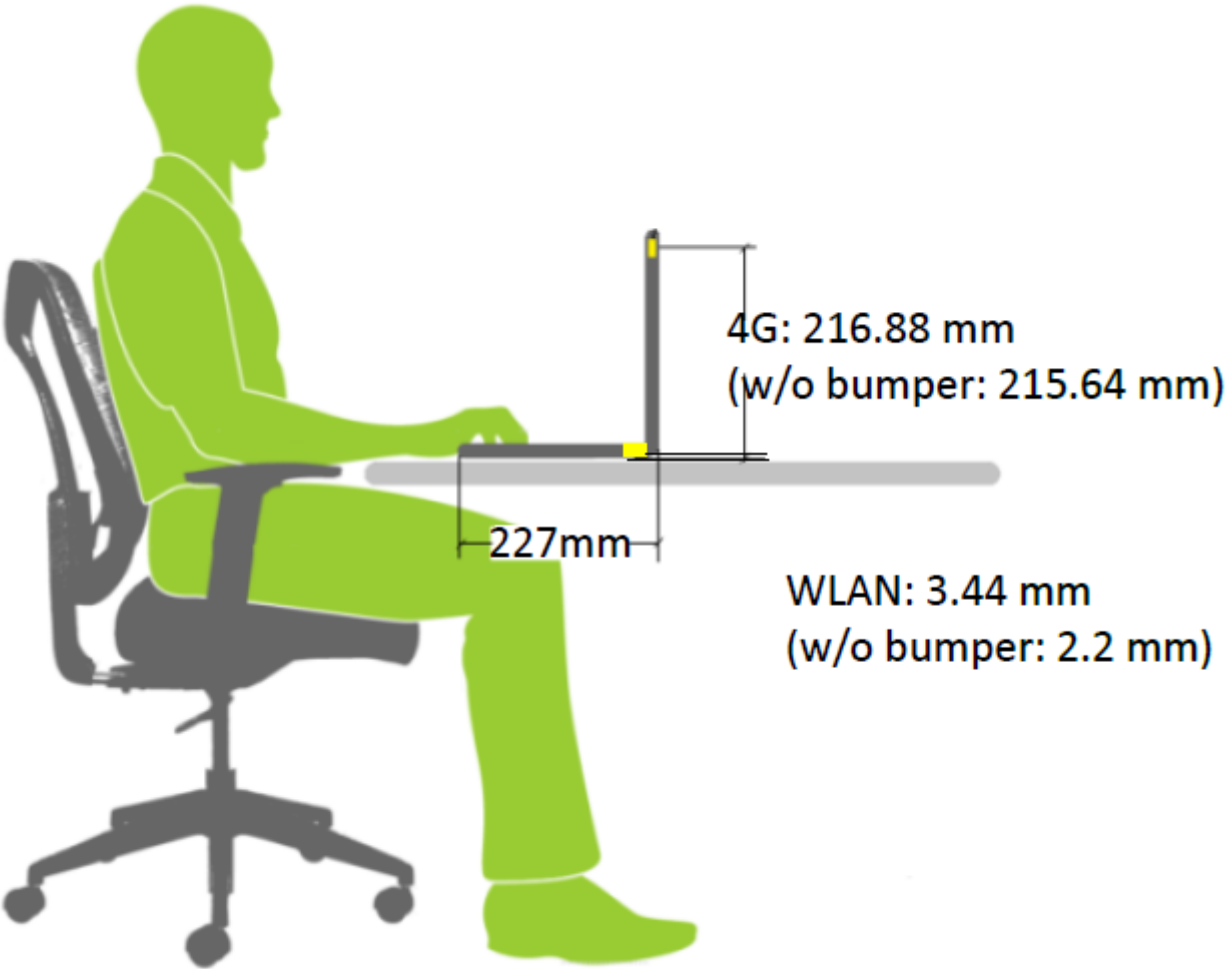

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

