

Date: 2025-01-09

## #01\_LTE Band 7\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL\_2600\_250109 Medium parameters used:  $f=2535.000$  MHz;  $\sigma=1.93$  S/m;  $\epsilon_r=40.0$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.85, 6.68, 7.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.279 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.11 dB

SAR (1g) = 0.555 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

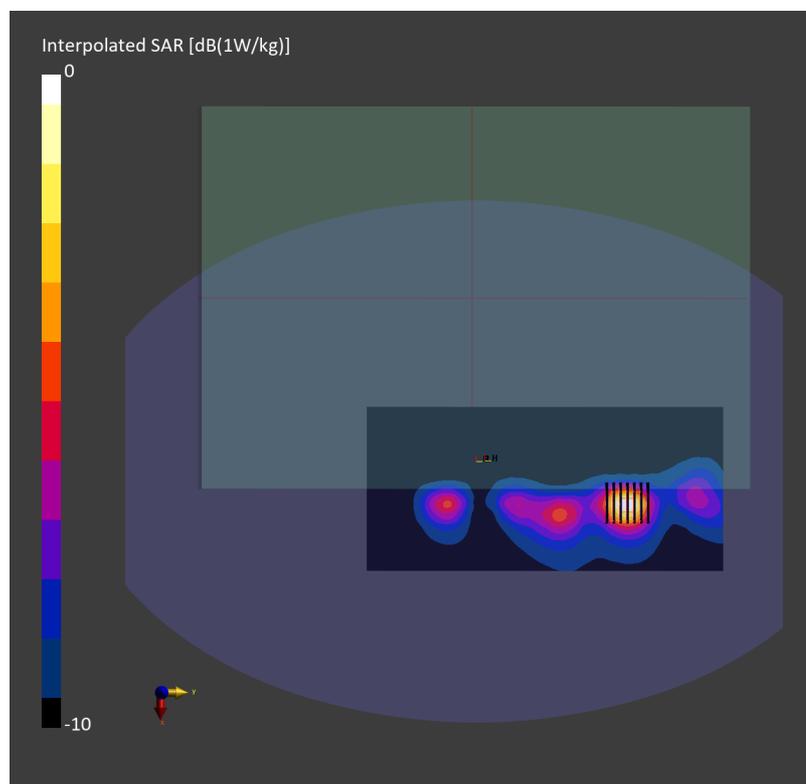

Date: 2025-01-08

**#02\_LTE Band 25\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch26340**

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL\_1900\_250108 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.40$  S/m;  $\epsilon_r=39.5$ 

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.49, 7.31, 7.91); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.166 W/kg; SAR (10g) = 0.099 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.173 W/kg; SAR (8g) = 0.110 W/kg; SAR (10g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

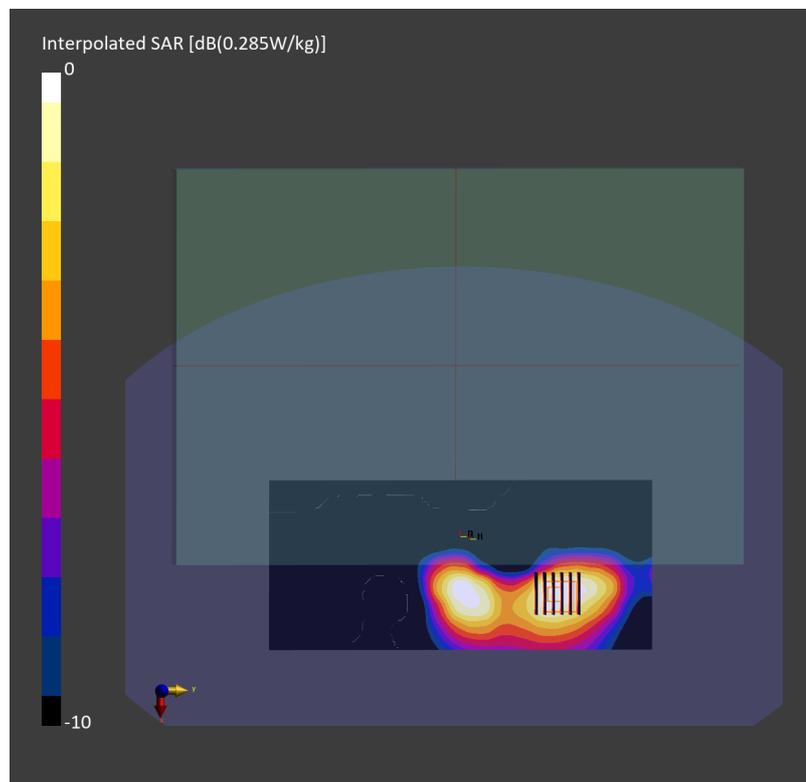

Date: 2025-01-06

## #03\_LTE Band 30\_10M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL\_2300\_250106 Medium parameters used:  $f=2310.000$  MHz;  $\sigma=1.64$  S/m;  $\epsilon_r=39.3$ 

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.16, 6.99, 7.56); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.194 W/kg; SAR (10g) = 0.109 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.188 W/kg; SAR (8g) = 0.115 W/kg; SAR (10g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 15.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.9 %

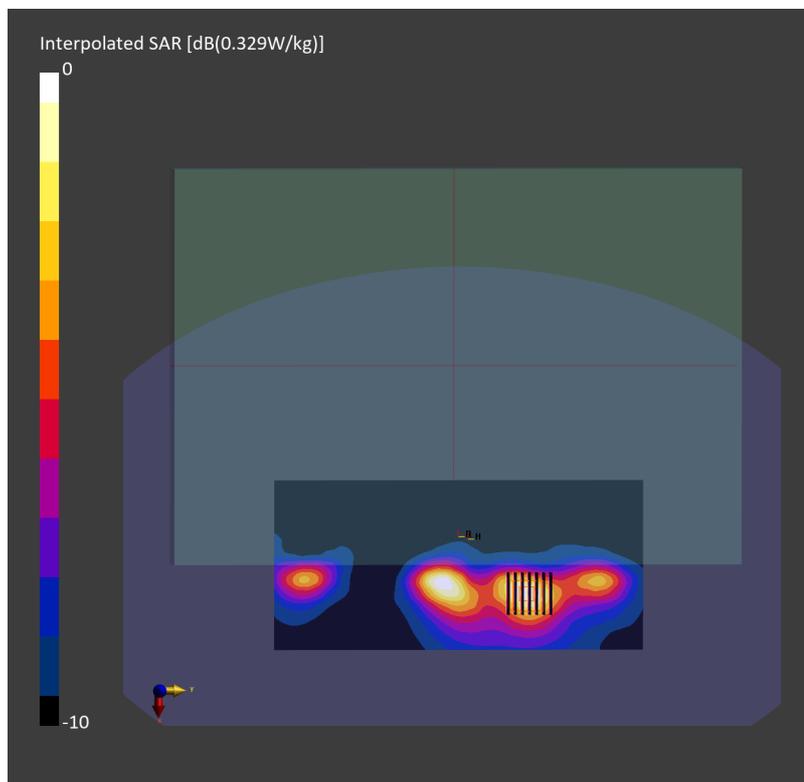

Date: 2025-01-09

**#04\_LTE Band 41\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch40185**

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL\_2600\_250109 Medium parameters used:  $f=2549.500$  MHz;  $\sigma=1.94$  S/m;  $\epsilon_r=39.9$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.85, 6.68, 7.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.235 W/kg; SAR (10g) = 0.115 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.11 dB

SAR (1g) = 0.232 W/kg; SAR (8g) = 0.127 W/kg; SAR (10g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

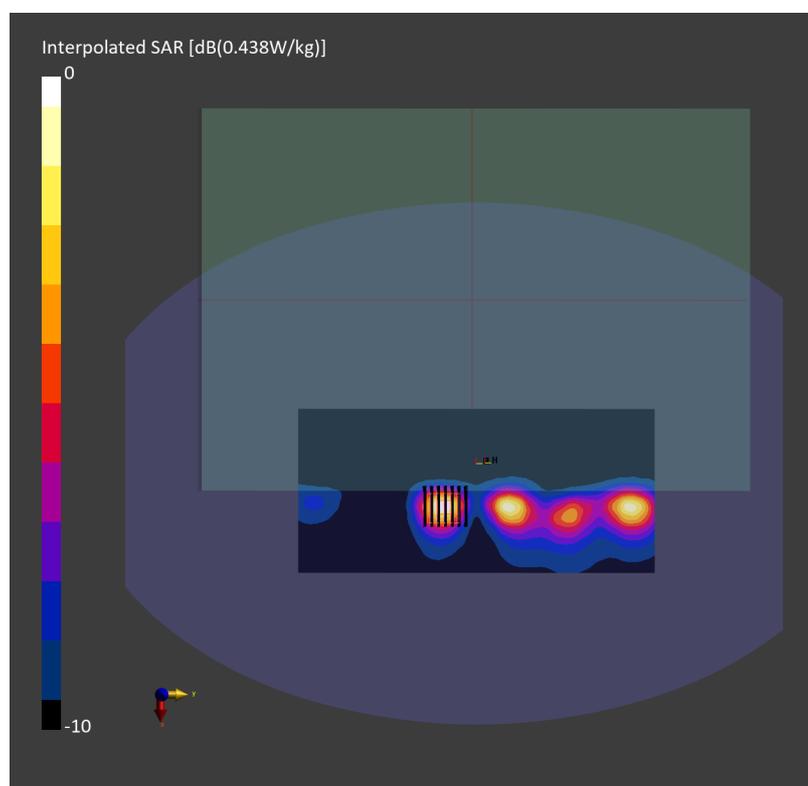

Date: 2025-01-09

**#05\_LTE Band 42\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch42590**

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL\_3500\_250109 Medium parameters used:  $f=3500.000$  MHz;  $\sigma=3.01$  S/m;  $\epsilon_r=37.9$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.51, 6.36, 6.88); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.467 W/kg; SAR (10g) = 0.197 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.454 W/kg; SAR (8g) = 0.212 W/kg; SAR (10g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

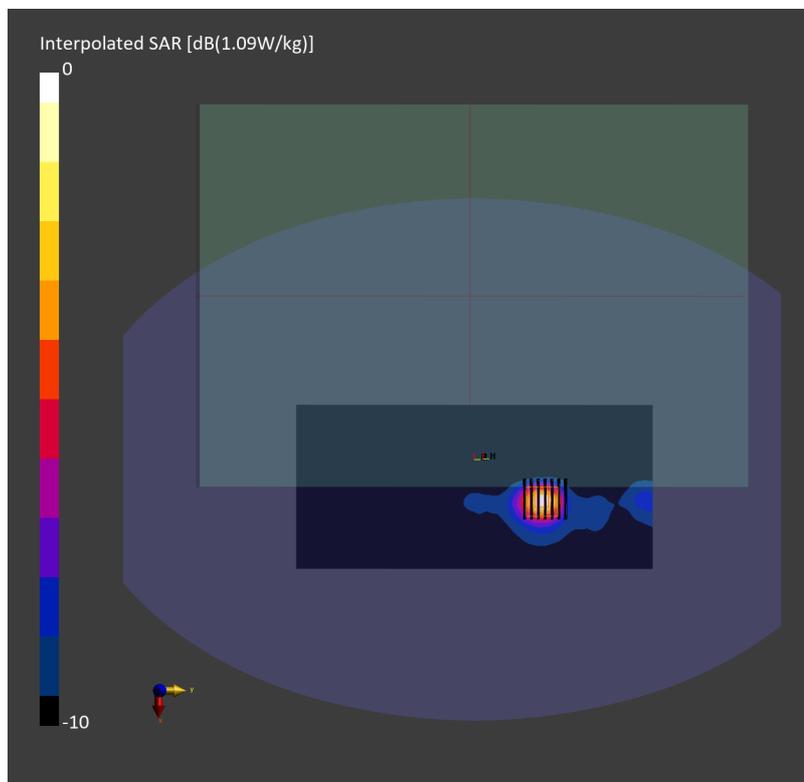

Date: 2025-01-07

## #06\_LTE Band 43\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch44690

Communication System: LTE-TDD ; Frequency: 3710.000 MHz

Medium: HSL\_3700\_250107 Medium parameters used:  $f=3710.000$  MHz;  $\sigma=3.14$  S/m;  $\epsilon_r=36.8$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.4, 6.24, 6.76); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

**Area Scan (100.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.479 W/kg; SAR (10g) = 0.207 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.18 dB

SAR (1g) = 0.479 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

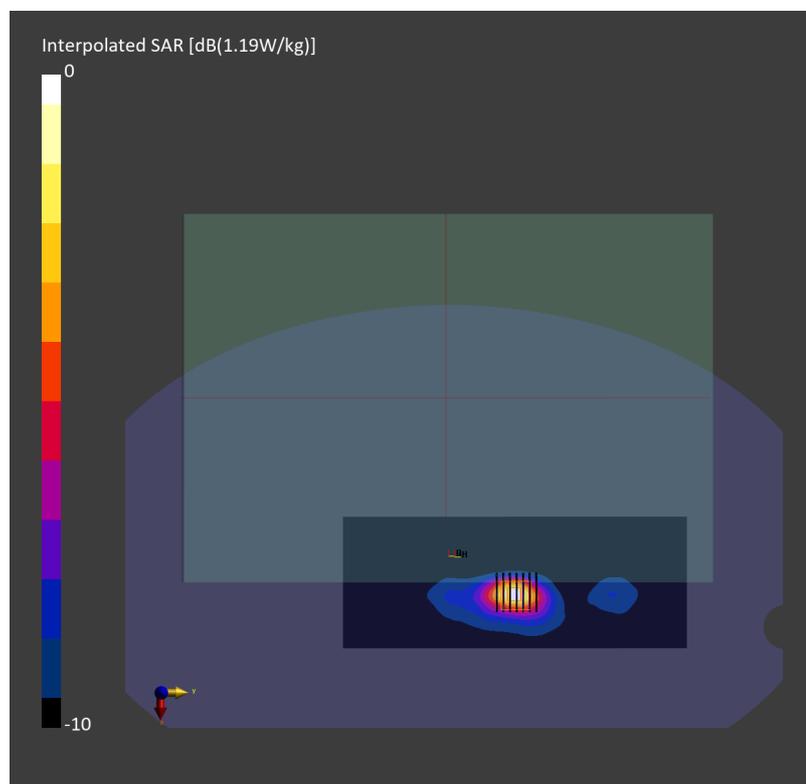

Date: 2025-01-07

**#07\_LTE Band 48\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch55340**

Communication System: LTE-TDD ; Frequency: 3560.000 MHz

Medium: HSL\_3500\_250107 Medium parameters used:  $f=3560.000$  MHz;  $\sigma=3.00$  S/m;  $\epsilon_r=37.0$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.51, 6.36, 6.88); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

**Area Scan (100.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.233 W/kg; SAR (10g) = 0.104 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.229 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.10 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

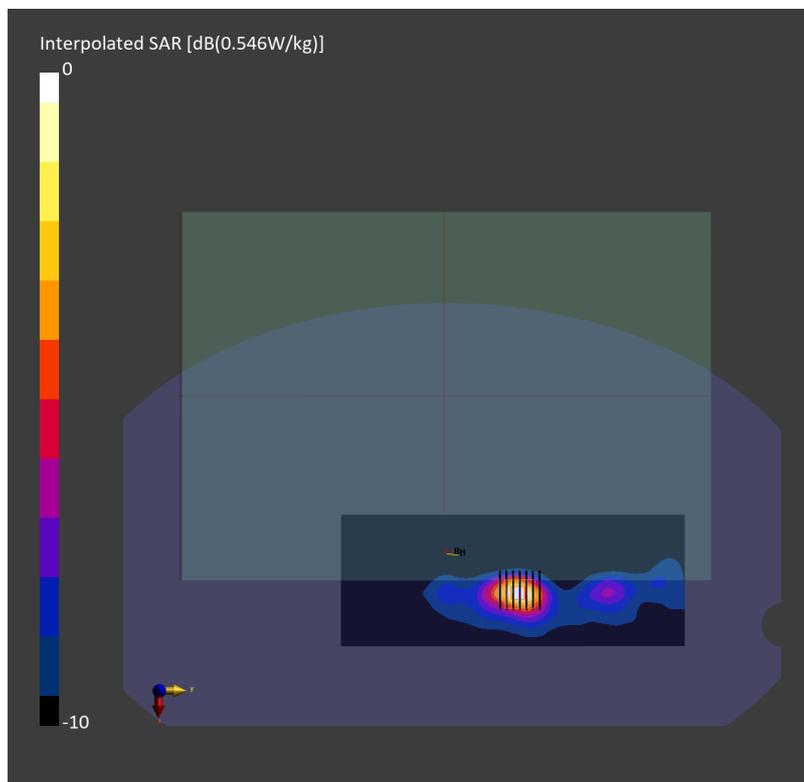

Date: 2025-01-08

## #08\_LTE Band 66\_20M\_QPSK\_1\_0\_Bottom Side\_0mm\_Ch132322

Communication System: LTE-FDD ; Frequency: 1745.000 MHz

Medium: HSL\_1750\_250108 Medium parameters used:  $f=1745.000$  MHz;  $\sigma=1.36$  S/m;  $\epsilon_r=40.2$ 

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.8, 7.61, 8.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.316 W/kg; SAR (10g) = 0.186 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.316 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 87.5 %

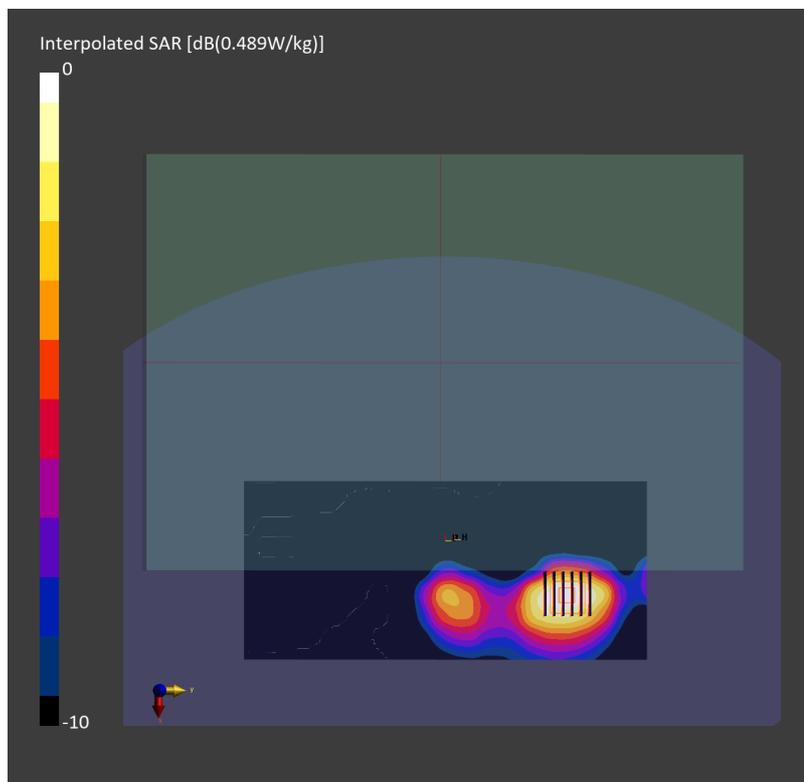

Date: 2025-01-06

## #09\_FR1 n7\_40M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch507000

Communication System: 5G NR ; Frequency: 2535.000 MHz

Medium: HSL\_2600\_250106 Medium parameters used:  $f = 2535.000$  MHz;  $\sigma = 1.89$  S/m;  $\epsilon_r = 38.4$ 

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.85, 6.68, 7.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (100.0 mm x 280.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.151 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.300 W/kg; SAR (8g) = 0.170 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

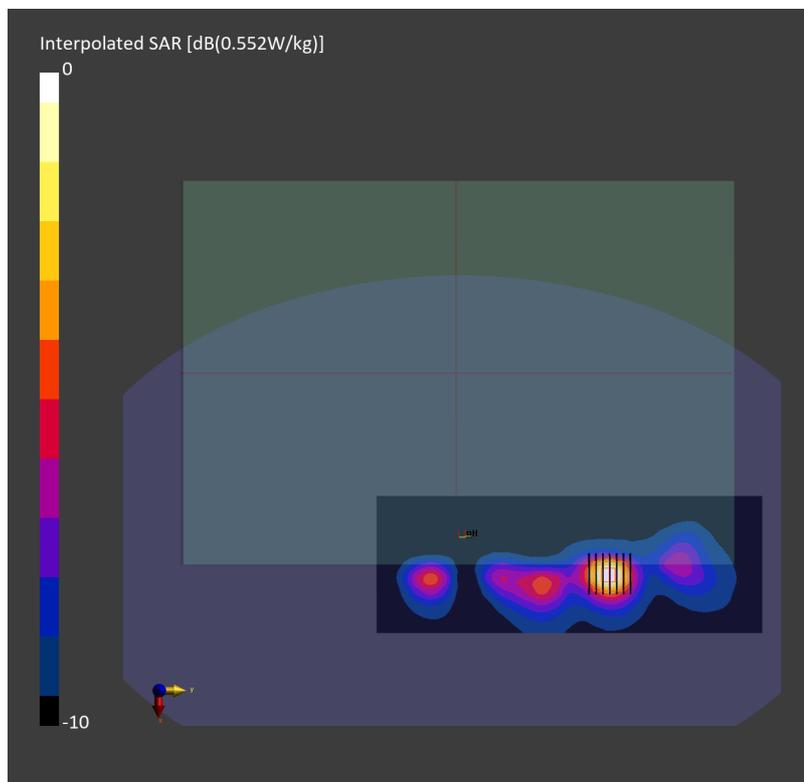

Date: 2025-01-08

## #10\_FR1 n25\_40M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch376500

Communication System: 5G NR ; Frequency: 1882.500 MHz

Medium: HSL\_1900\_250108 Medium parameters used:  $f = 1882.500$  MHz;  $\sigma = 1.40$  S/m;  $\epsilon_r = 39.5$ 

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.49, 7.31, 7.91); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (120.0 mm x 270.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.105 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.175 W/kg; SAR (8g) = 0.113 W/kg; SAR (10g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

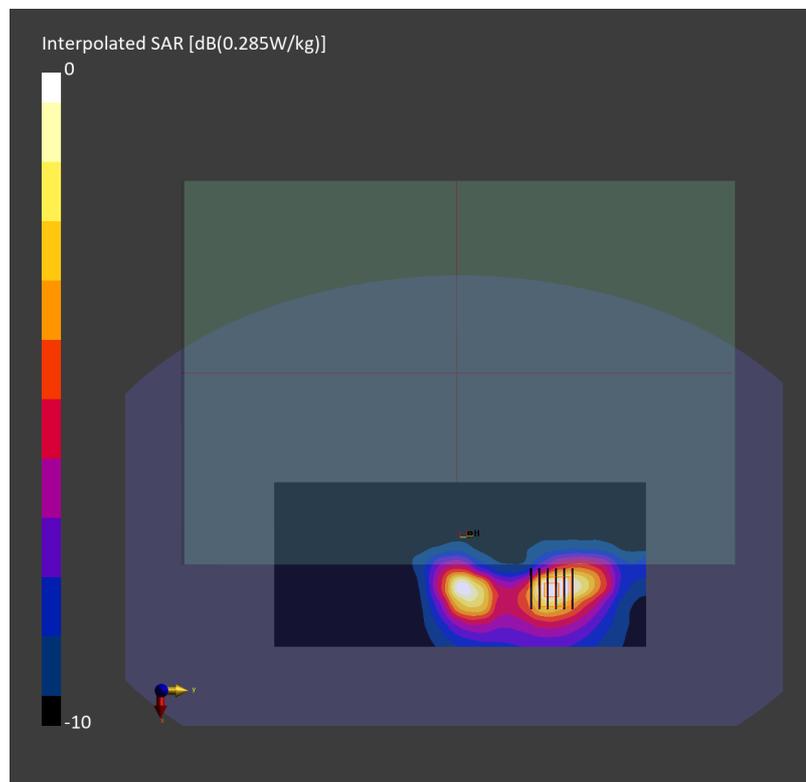

Date: 2025-01-06

## #11\_FR1 n30\_10M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch462000

Communication System: 5G NR ; Frequency: 2310.000 MHz

Medium: HSL\_2300\_250106 Medium parameters used:  $f = 2310.000$  MHz;  $\sigma = 1.64$  S/m;  $\epsilon_r = 39.3$ 

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.16, 6.99, 7.56); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (100.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.144 W/kg; SAR (10g) = 0.078 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.140 W/kg; SAR (8g) = 0.084 W/kg; SAR (10g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 87.4 %

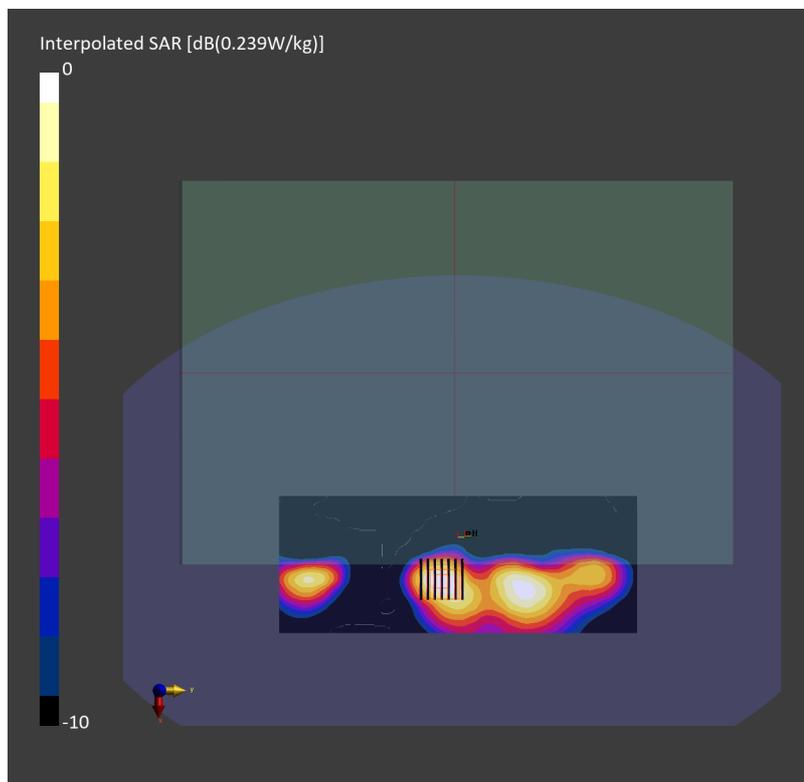

Date: 2025-01-08

## #12\_FR1 n66\_40M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch349000

Communication System: 5G NR ; Frequency: 1745.000 MHz

Medium: HSL\_1750\_250108 Medium parameters used:  $f = 1745.000$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.8$ 

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.8, 7.61, 8.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.416 W/kg; SAR (10g) = 0.247 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.437 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.8 %

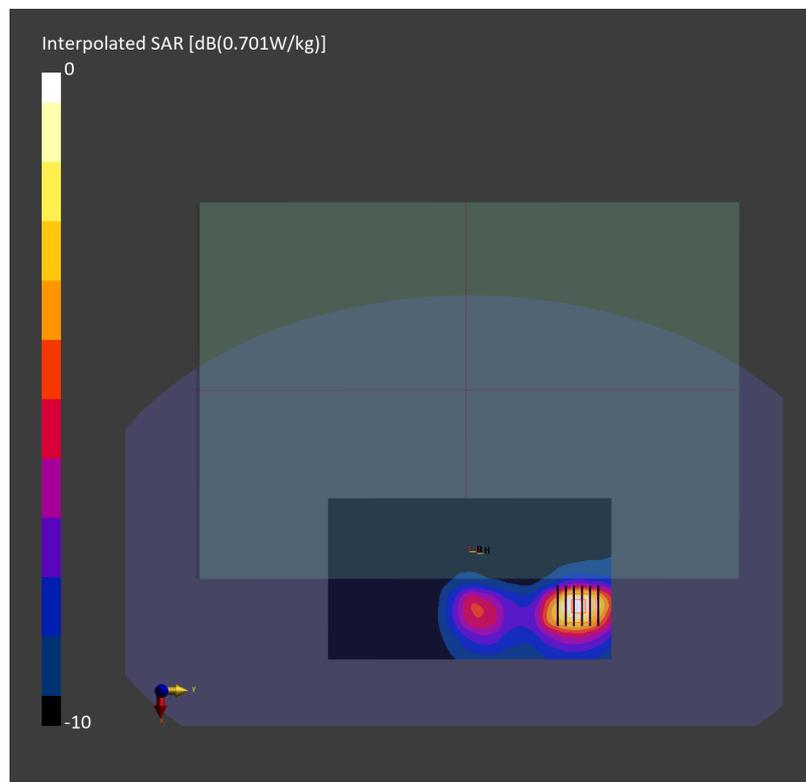

Date: 2025-01-08

## #13\_FR1 n70\_15M\_BPSK\_36\_22\_Bottom Side\_0mm\_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL\_1750\_250108 Medium parameters used:  $f=1702.500$  MHz;  $\sigma=1.32$  S/m;  $\epsilon_r=40.0$ 

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.8, 7.61, 8.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

**Area Scan (120.0 mm x 240.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.359 W/kg; SAR (10g) = 0.209 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.365 W/kg; SAR (8g) = 0.240 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

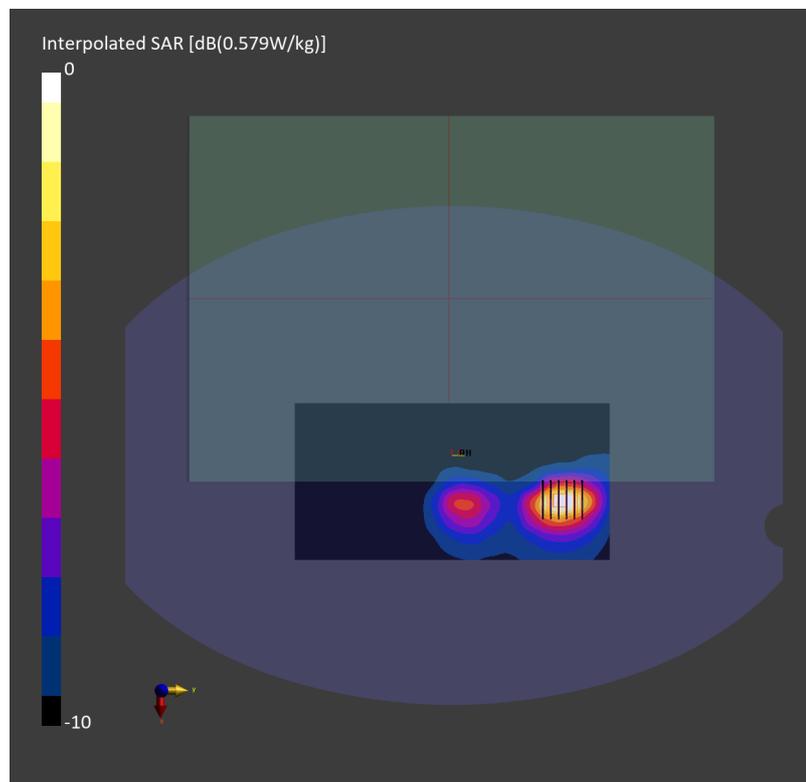

Date: 2025-01-06

## #14\_FR1 n41\_100M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch518598

Communication System: 5G NR ; Frequency: 2592.990 MHz

Medium: HSL\_2600\_250106 Medium parameters used:  $f = 2592.990$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 38.2$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.85, 6.68, 7.24); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (100.0 mm x 300.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.531 W/kg; SAR (10g) = 0.270 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.552 W/kg; SAR (8g) = 0.313 W/kg; SAR (10g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

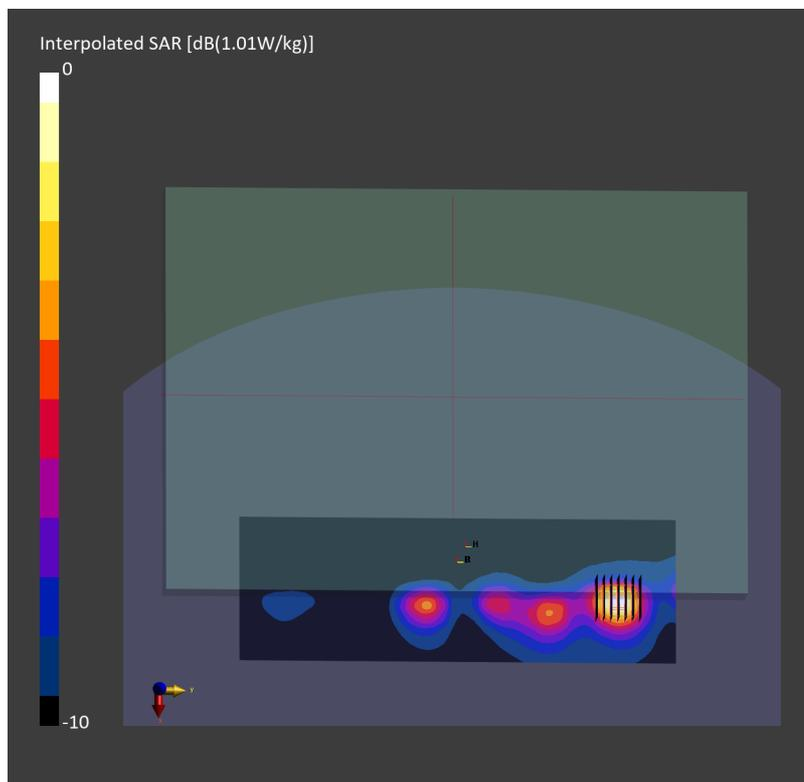

Date: 2025-01-07

## #15\_FR1 n48\_40M\_BPSK\_1\_1\_Bottom Side\_0mm\_Ch641666

Communication System: 5G NR ; Frequency: 3624.985 MHz

Medium: HSL\_3700\_250107 Medium parameters used:  $f = 3624.985$  MHz;  $\sigma = 3.07$  S/m;  $\epsilon_r = 37.0$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.4, 6.24, 6.76); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

**Area Scan (100.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.484 W/kg; SAR (10g) = 0.210 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.492 W/kg; SAR (8g) = 0.231 W/kg; SAR (10g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

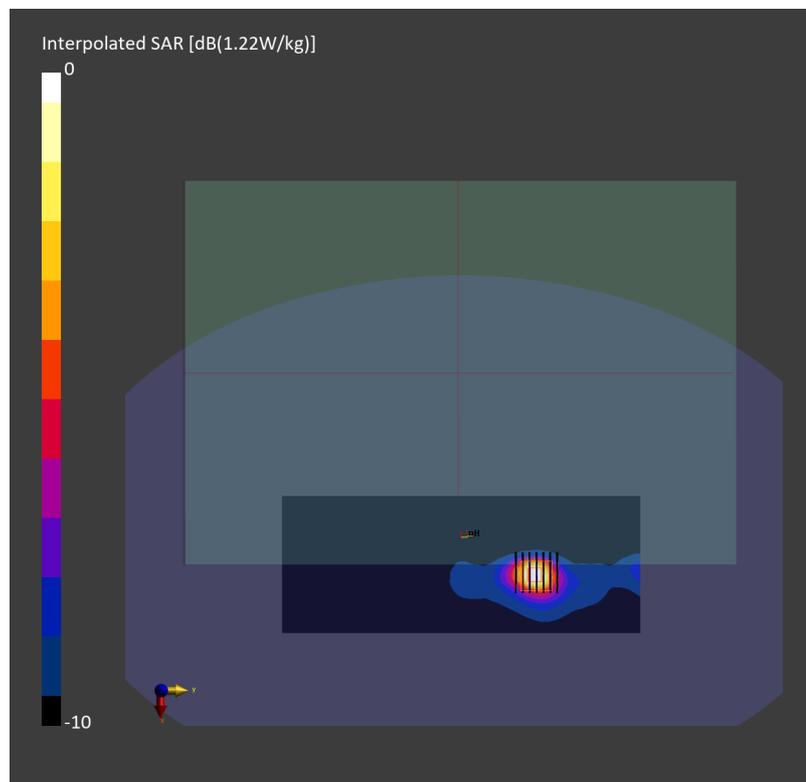

Date: 2025-01-07

## #16\_FR1 n77\_100M\_BPSK\_1\_1\_Bottom Side\_17mm\_Ch656000

Communication System: 5G NR ; Frequency: 3840.000 MHz

Medium: HSL\_3900\_250107 Medium parameters used:  $f = 3840.000$  MHz;  $\sigma = 3.27$  S/m;  $\epsilon_r = 36.7$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

## DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.35, 6.2, 6.72); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (100.0 mm x 260.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.582 W/kg; SAR (10g) = 0.274 W/kg;

**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.596 W/kg; SAR (8g) = 0.304 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

