


2. Block Diagram of RF Mouse

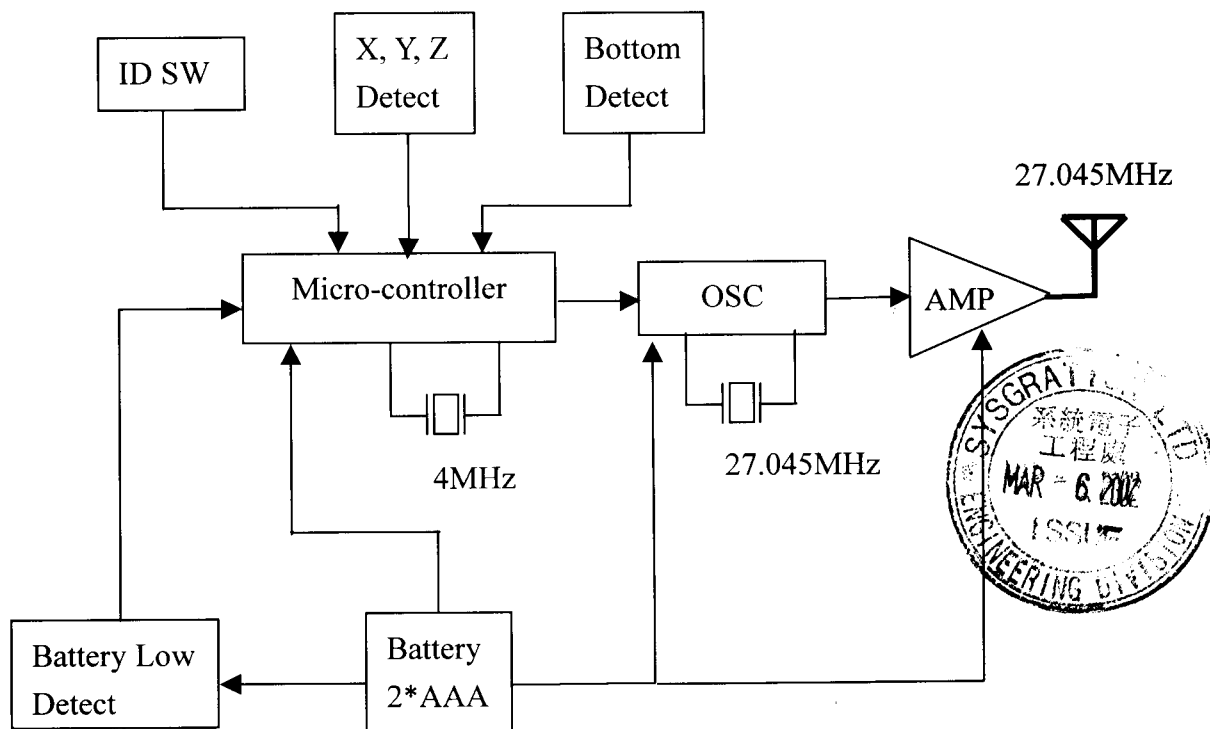

永維複印

DO NOT COPY

Mouse:

When Power on, Micro controller is starting to detect the function input signal.

Ex: ID switch, X,Y,Z axis motion detect, battery low detect.

After detecting signals, micro controller encoder data and send data to OSC and local OSC. Then modulation through AMP and turned to radio signal.

文件編號 20040202005			
版次	/	頁次	15-P 13