



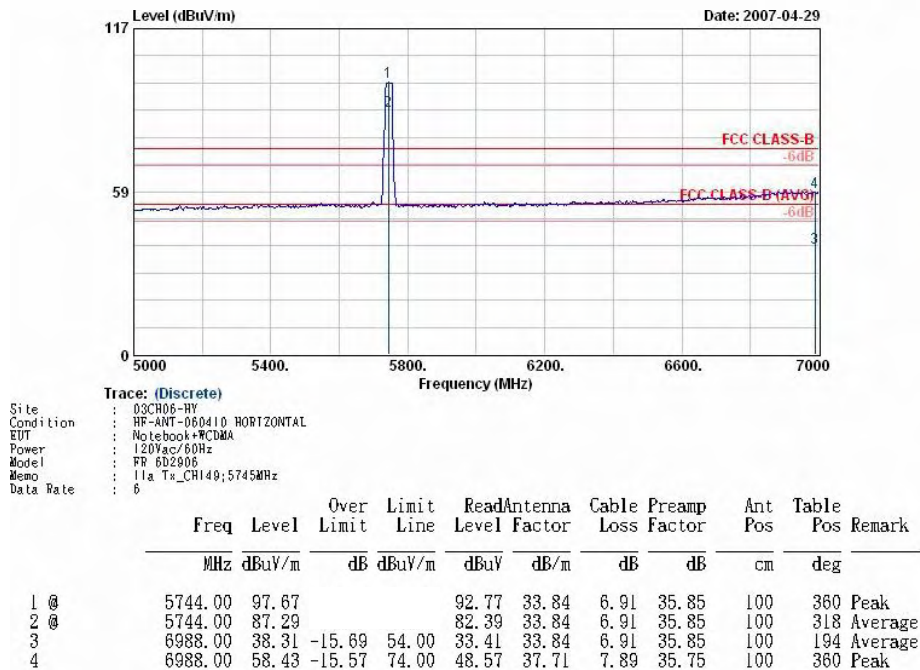

FCC / IC TEST REPORT

Report No. : FR6D2906-A

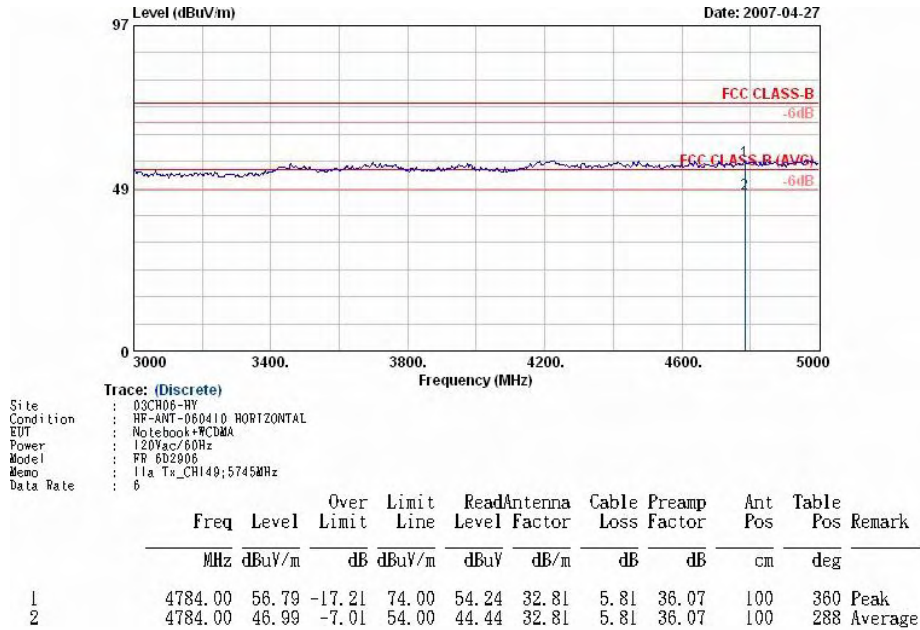


Remark: #1 and #2 Fundamental Signal




FCC / IC TEST REPORT

Report No. : FR6D2906-A

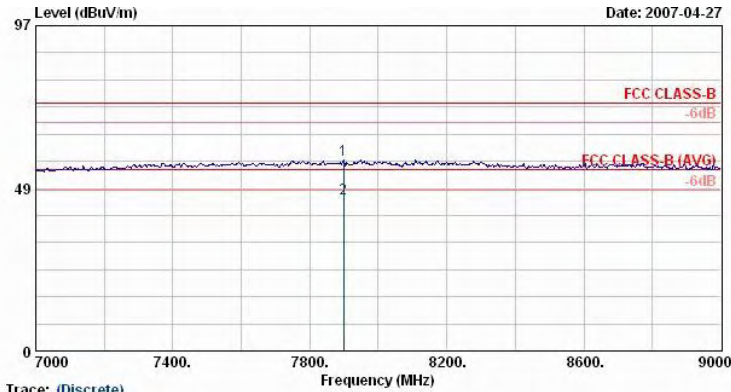

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH149;5745MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7898.00	57.04	-16.96	74.00	45.71	39.46	7.76	35.88	---	Peak
2	7898.00	45.54	-8.46	54.00	34.20	39.46	7.76	35.88	100	142 Average

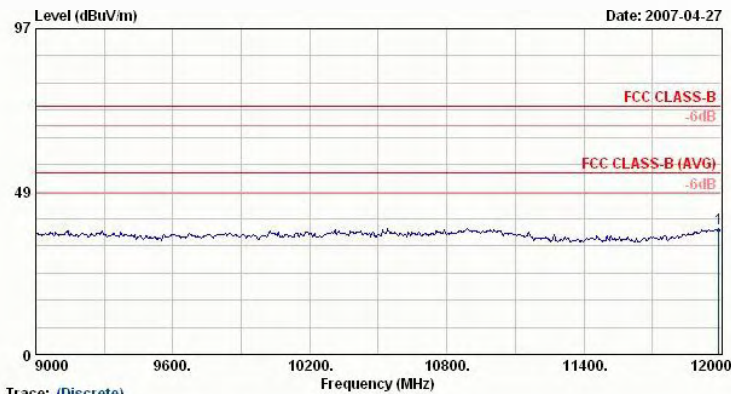



Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH149;5745MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	11991.00	37.56	-36.44	74.00	73.16	-9.64	10.63	36.58	---	Peak



FCC / IC TEST REPORT



Report No. : FR6D2906-A

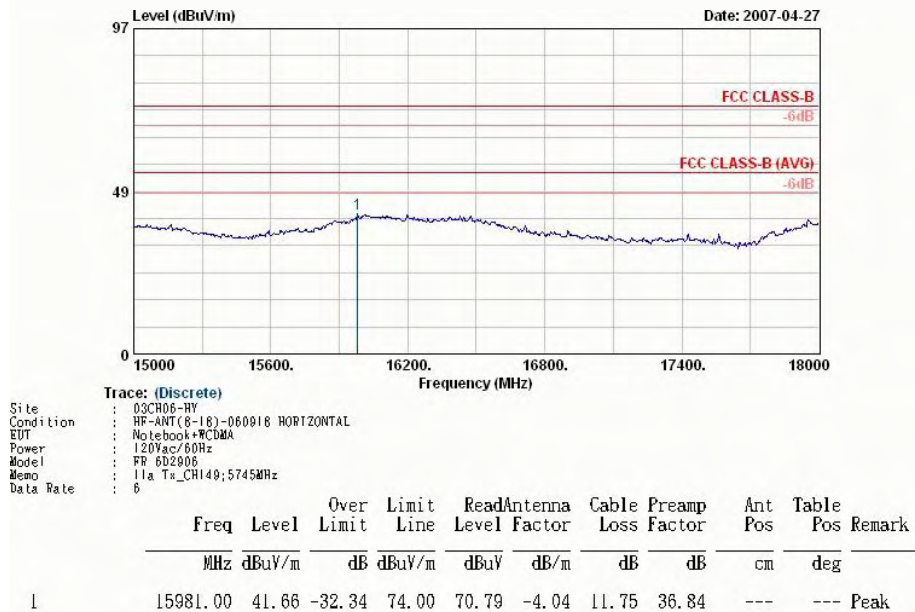
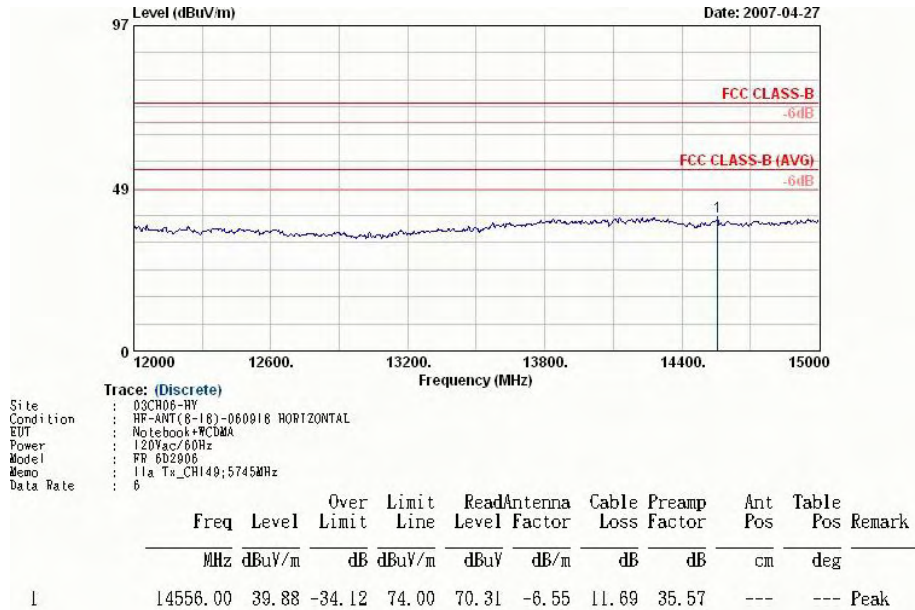





- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

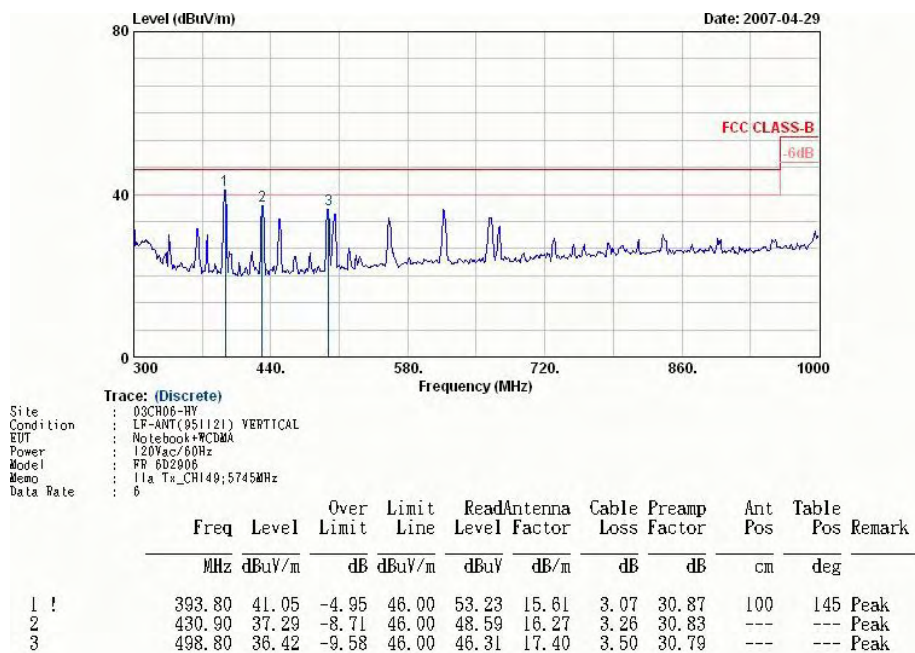
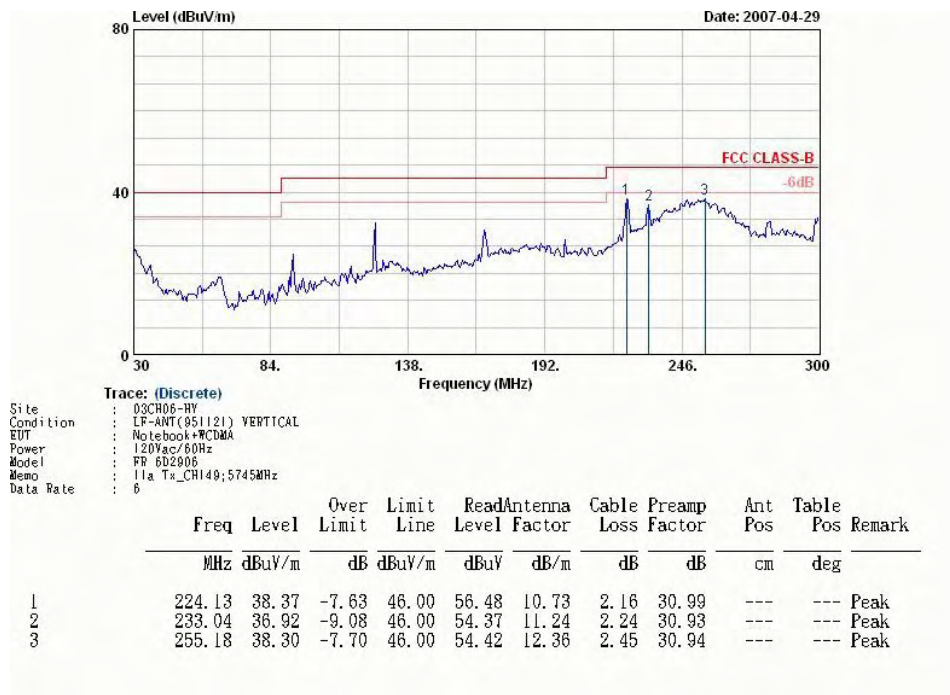


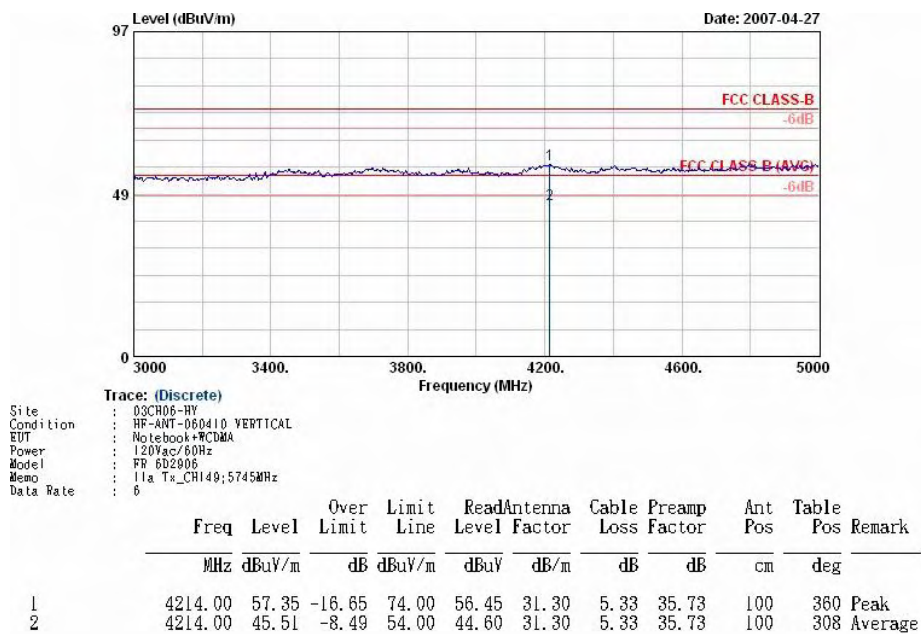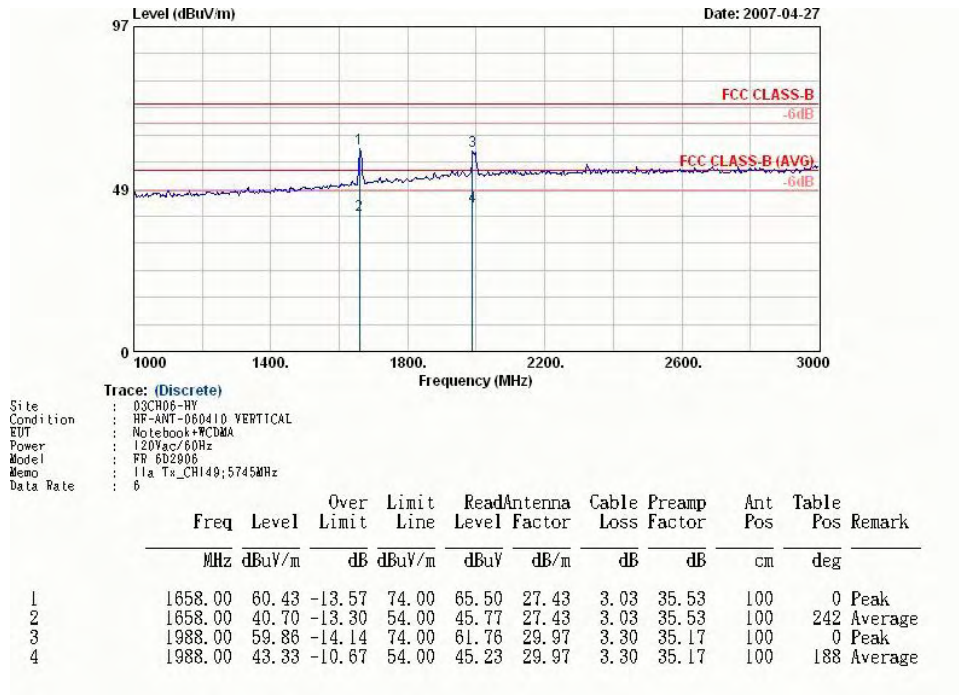


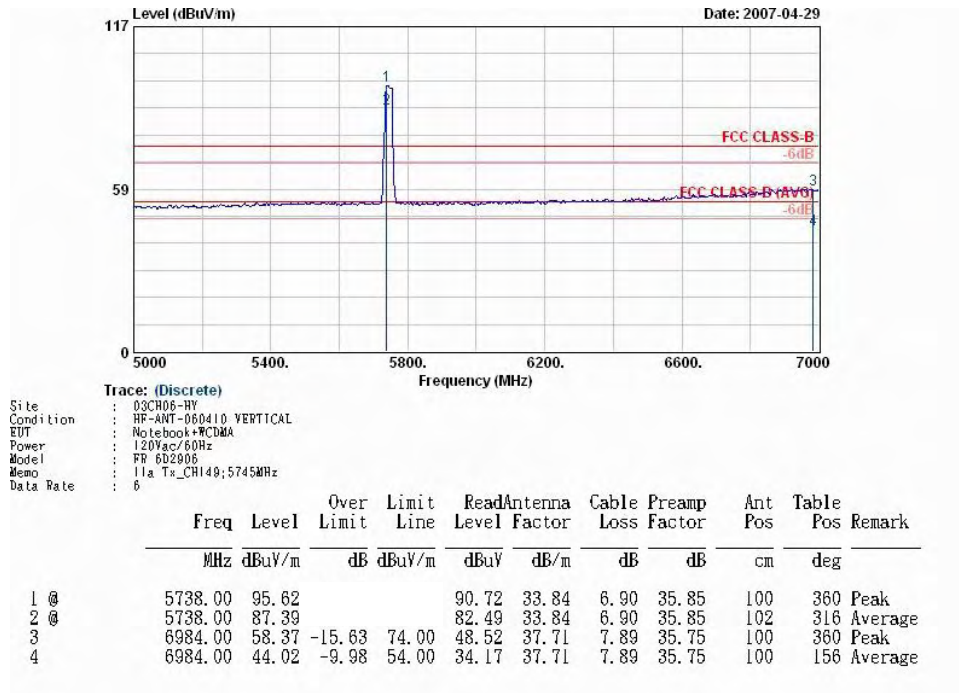

Remark: #1 and #2 Fundamental Signal

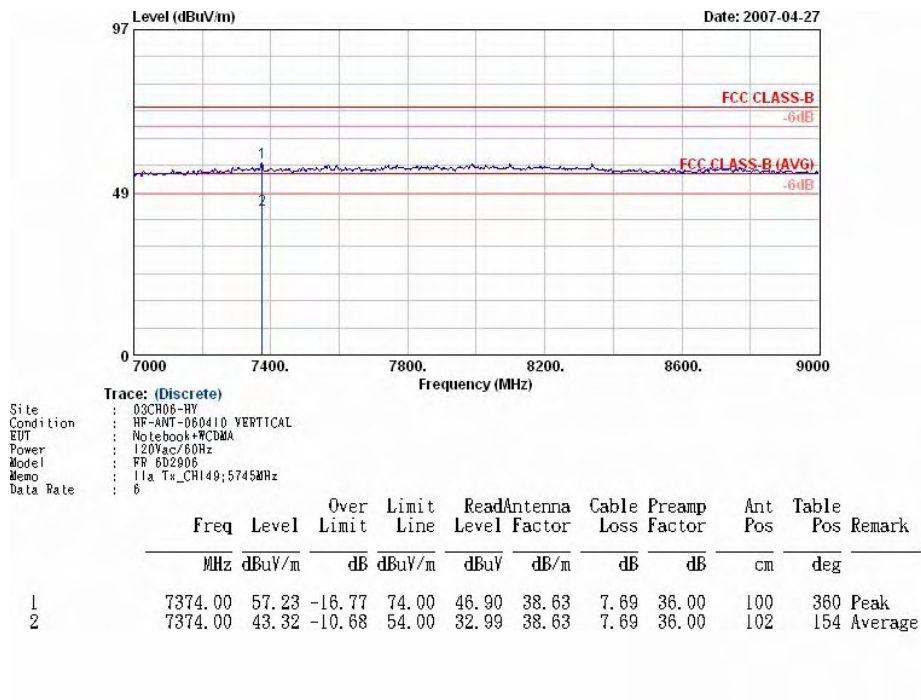

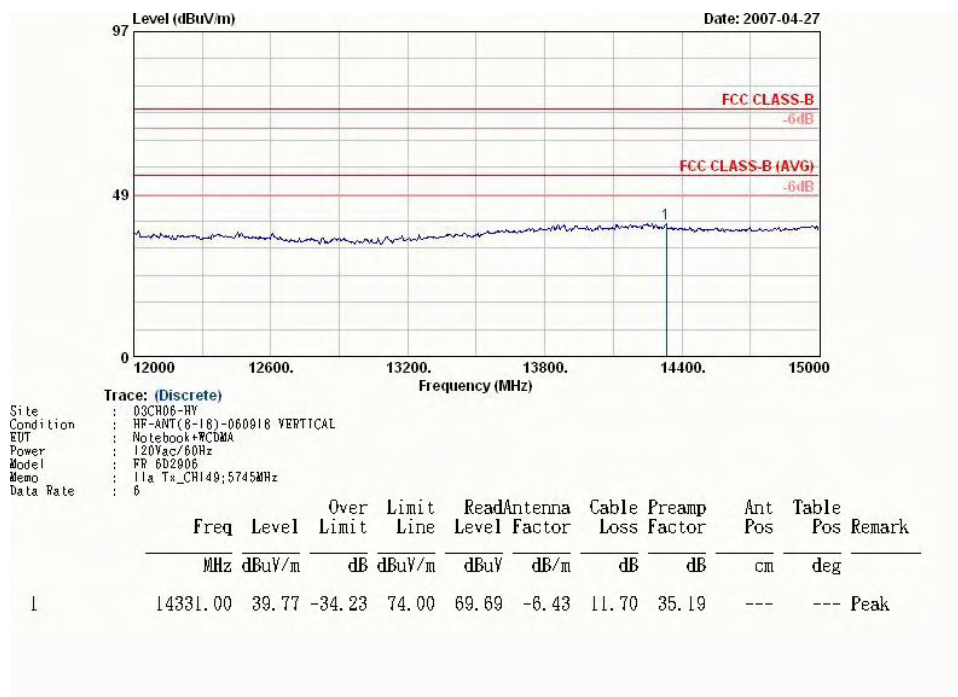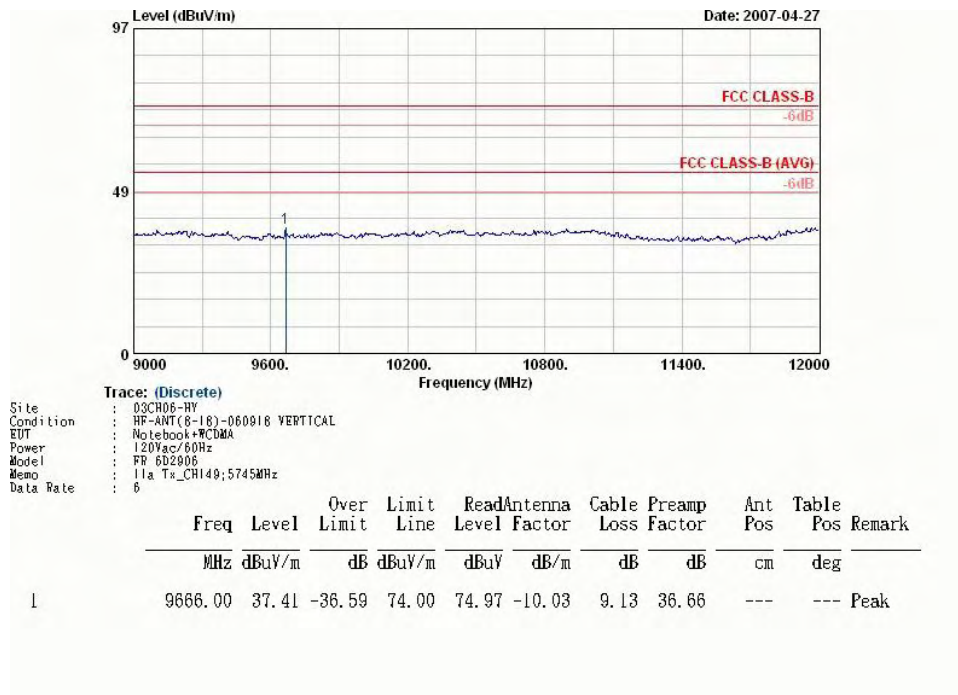


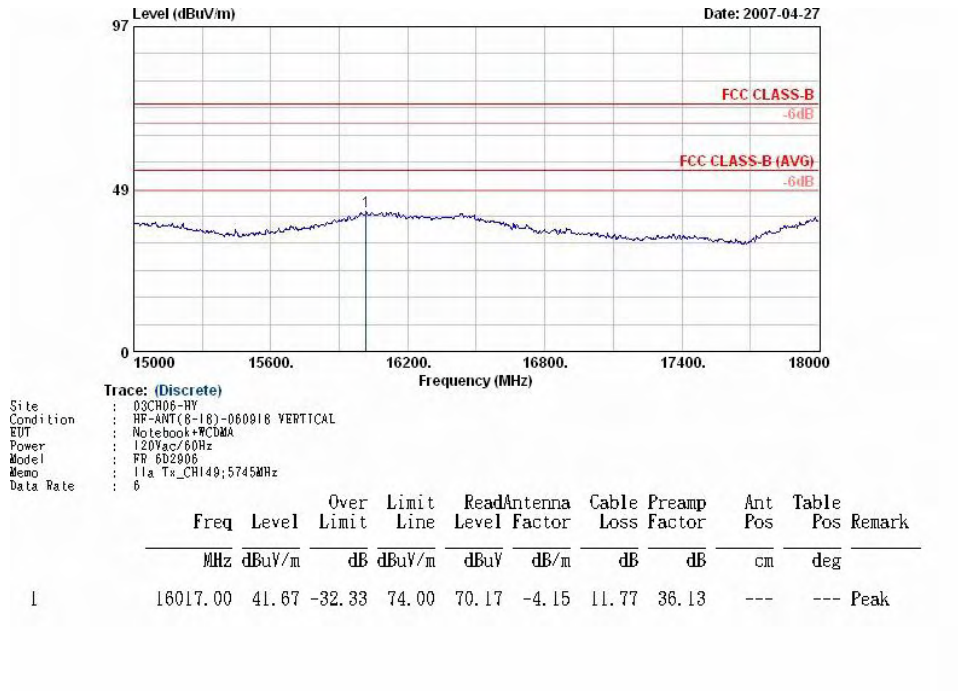


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.



- Test Mode : Mode 8
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

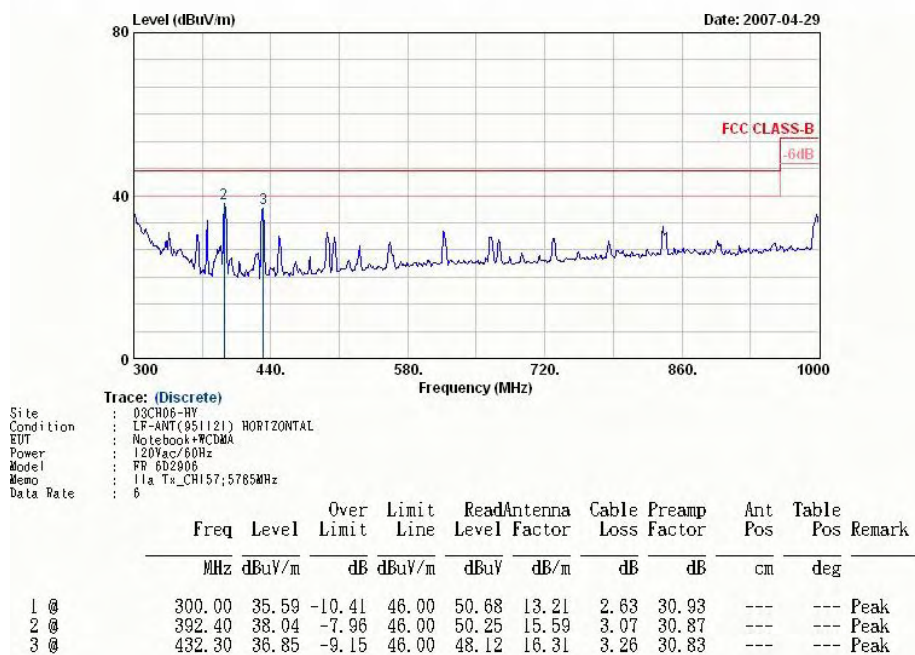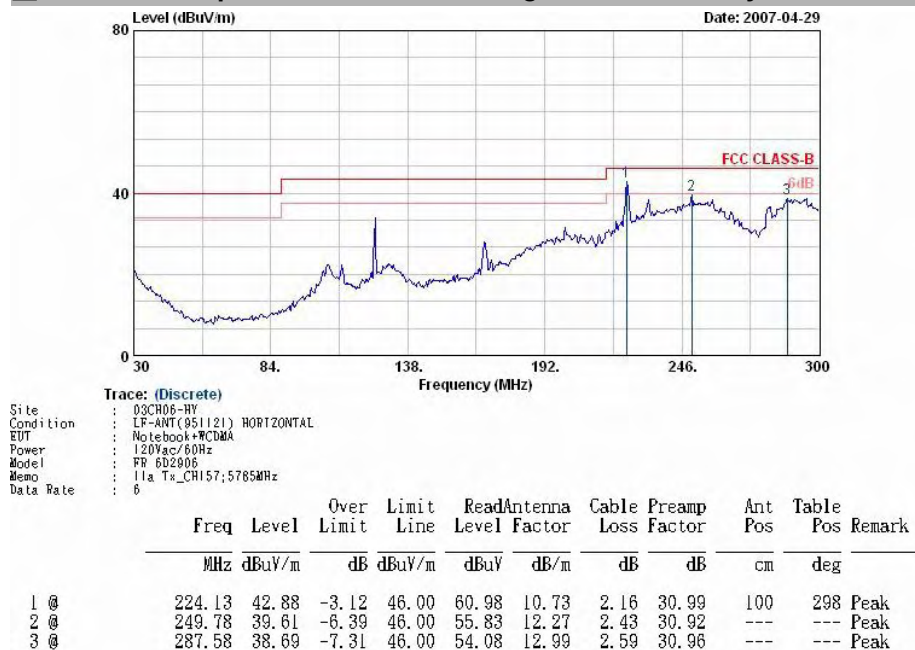




FCC / IC TEST REPORT

Report No. : FR6D2906-A

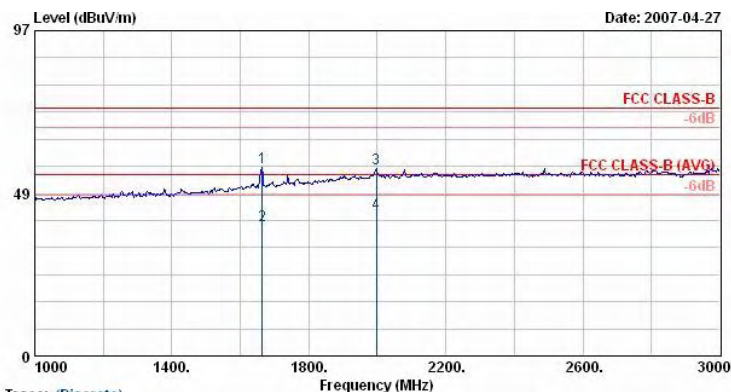

Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH157;5765MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	1664.00	56.28	-17.72	74.00	61.36	27.43	3.03	35.53	100	360 Peak
2 @	1664.00	38.91	-15.09	54.00	43.98	27.43	3.03	35.53	100	360 Average
3 @	1998.00	55.95	-18.05	74.00	57.70	30.10	3.32	35.17	100	360 Peak
4 @	1998.00	42.48	-11.52	54.00	44.23	30.10	3.32	35.17	100	66 Average

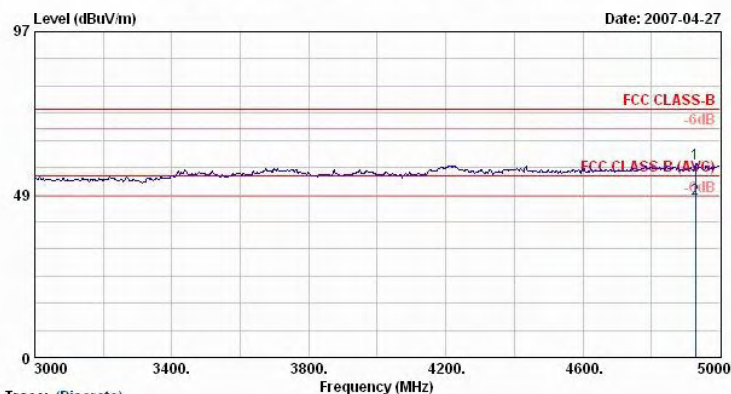


Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH157;5765MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	4928.00	57.57	-16.43	74.00	54.52	33.34	5.92	36.21	100	360 Peak
2 @	4928.00	47.21	-6.79	54.00	44.16	33.34	5.92	36.21	100	288 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-A

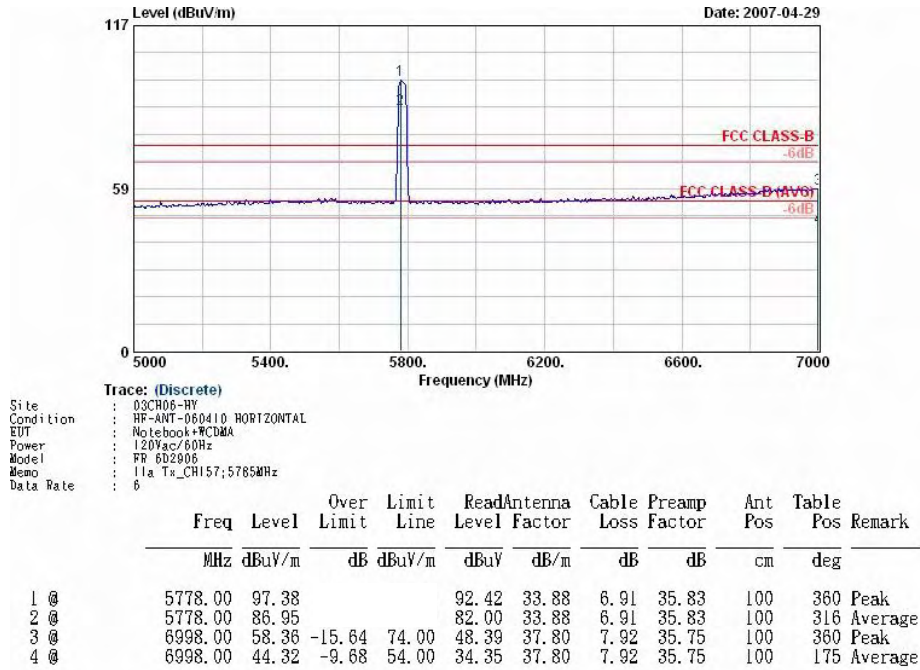



Remark: #1 and #2 Fundamental Signal

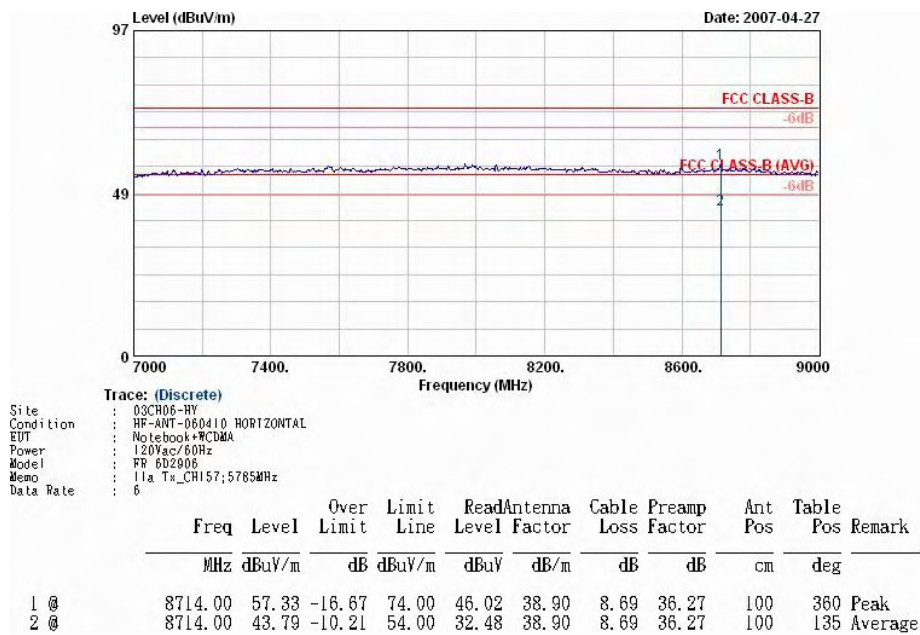



FCC / IC TEST REPORT


Report No. : FR6D2906-A

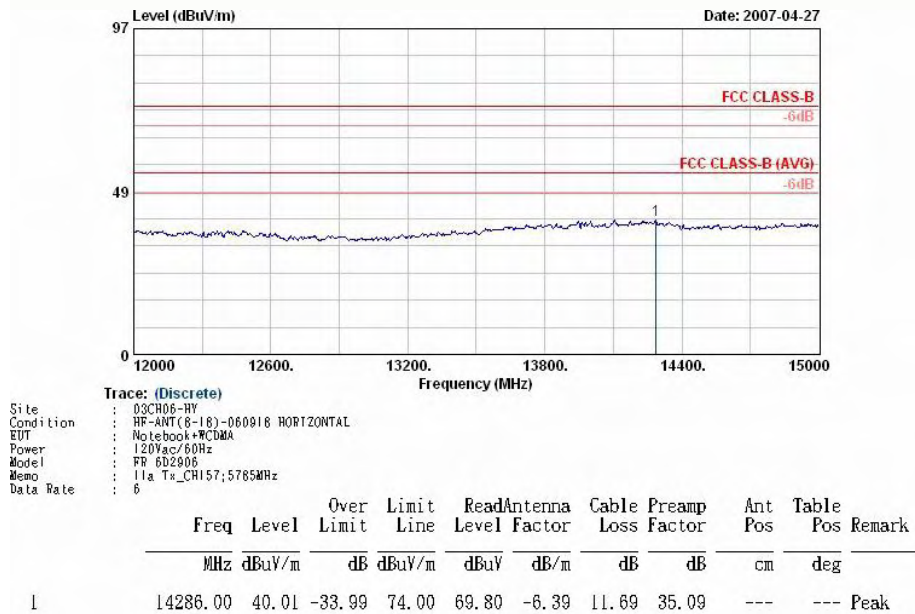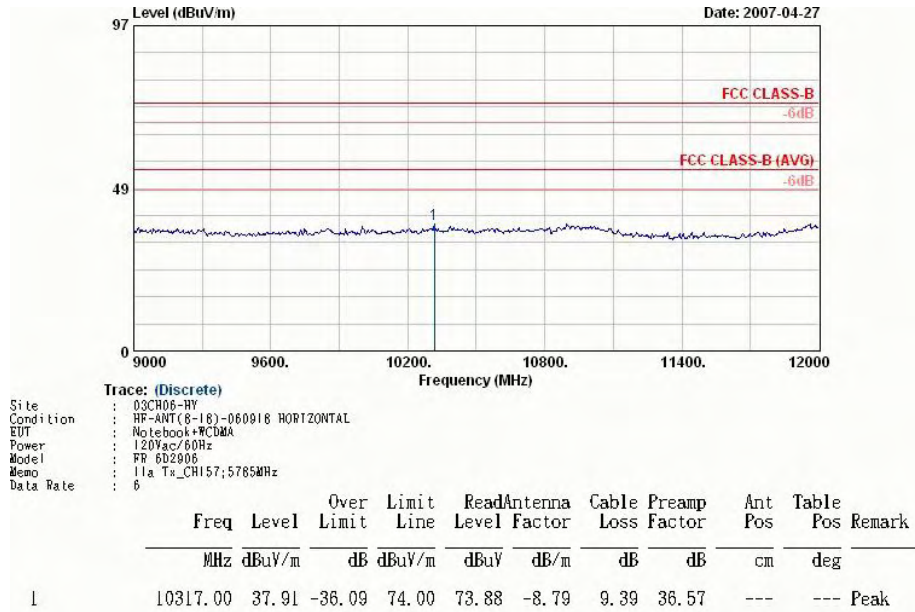



FCC / IC TEST REPORT

Report No. : FR6D2906-A

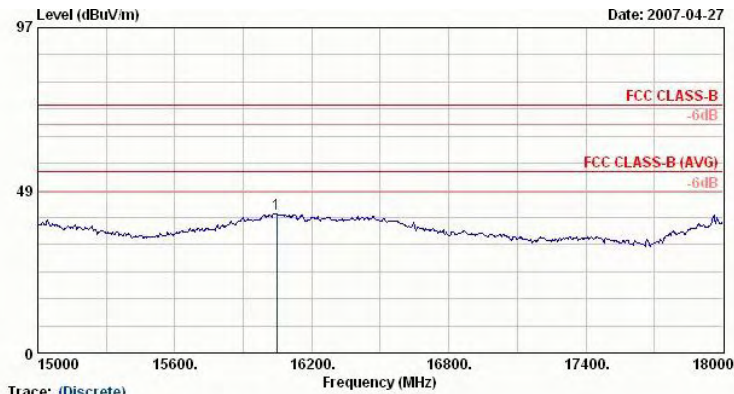



Trace: (Discrete)
Site : 03CH06-HV
Condition : HP-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH157.5765MHz
Data Rate : 6


Data Rate : 0										
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	16047.00	41.53	-32.47	74.00	70.10	-4.52	11.78	35.83	---	--- Peak



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

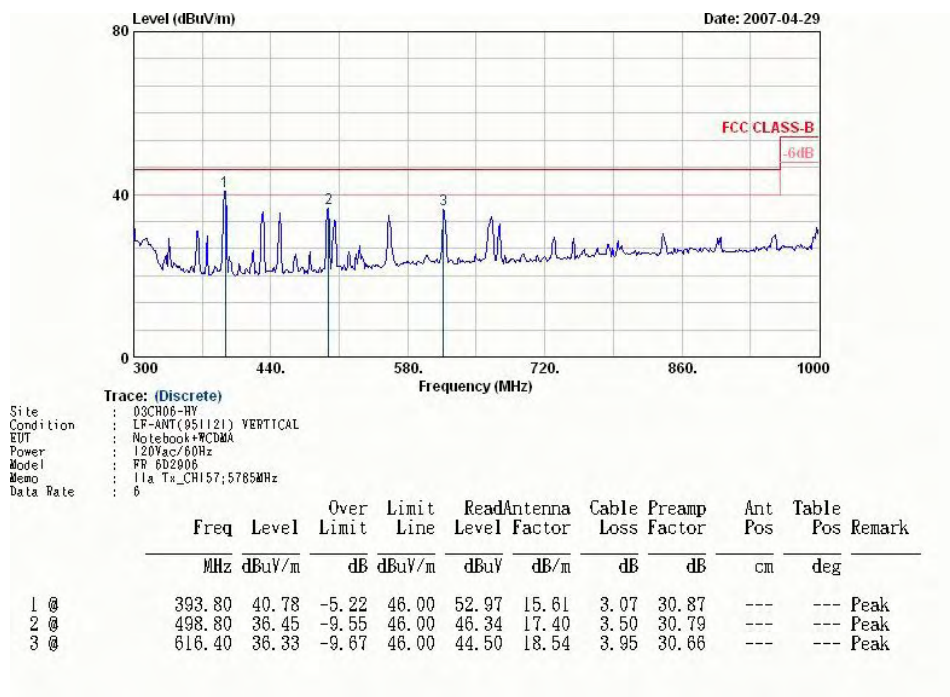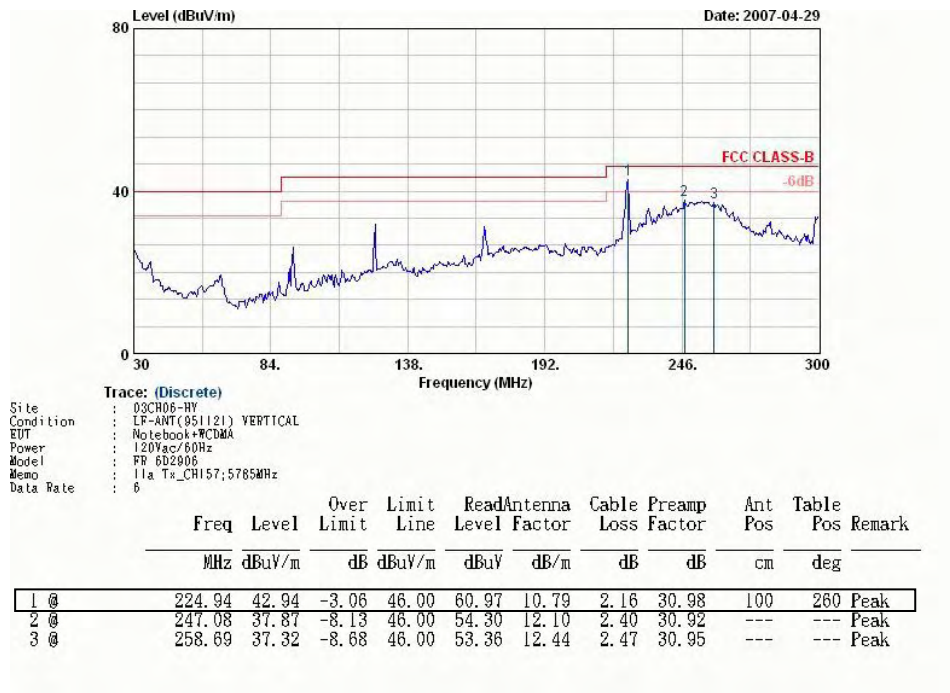

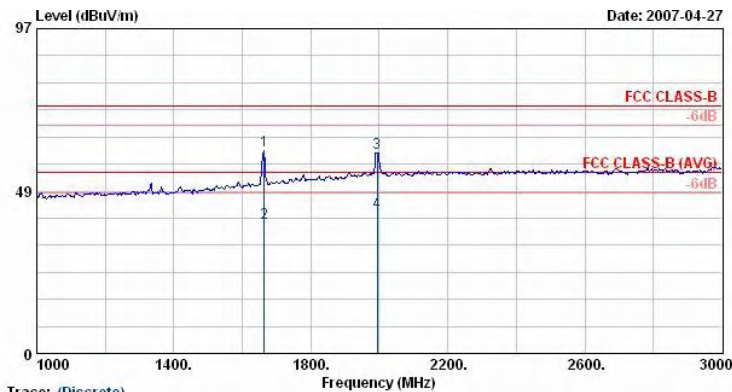


Trace: (Discrete)
Site : 03CH06-WY
Condition : HF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH157;5785MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1 @	1664.00	60.47	-13.53	74.00	65.55	27.43	3.03	35.53	100	360 Peak
2 @	1664.00	38.97	-15.03	54.00	44.04	27.43	3.03	35.53	100	242 Average
3 @	1994.00	59.87	-14.13	74.00	61.78	29.97	3.30	35.17	100	360 Peak
4 @	1994.00	42.31	-11.69	54.00	44.21	29.97	3.30	35.17	100	176 Average

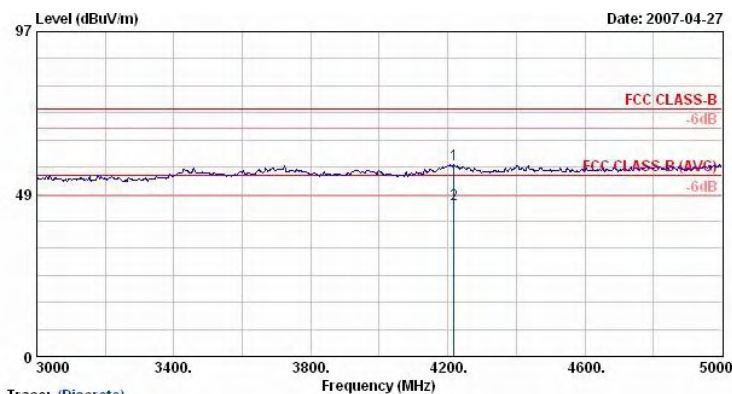




Trace: (Discrete)
Site : 03CH06-WY
Condition : HF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH157;5785MHz
Data Rate : 6


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1 @	4218.00	57.45	-16.55	74.00	56.54	31.30	5.33	35.73	100	360 Peak
2 @	4218.00	45.56	-8.44	54.00	44.65	31.30	5.33	35.73	100	294 Average

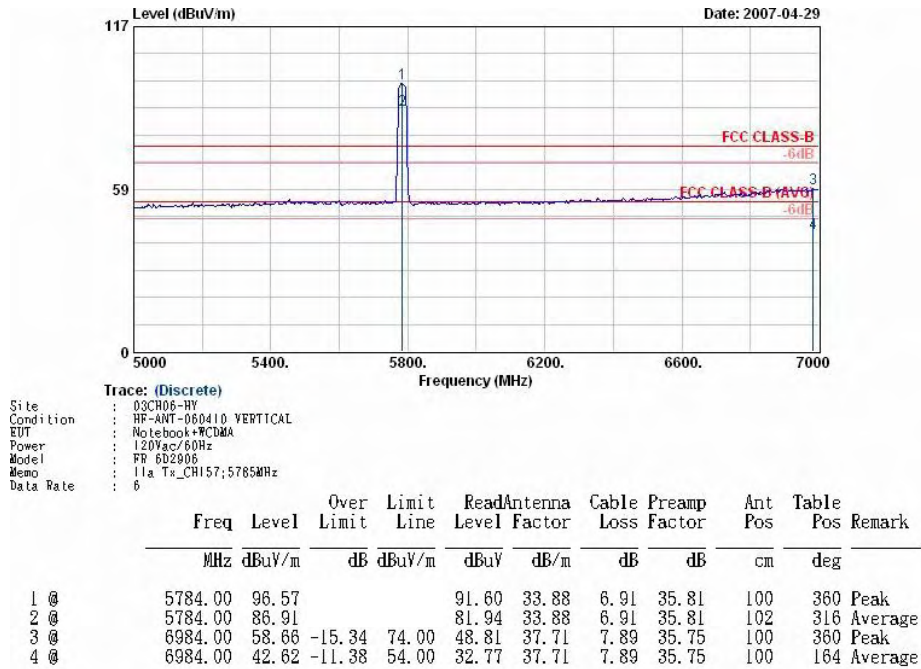

Remark: #1 and #2 Fundamental Signal

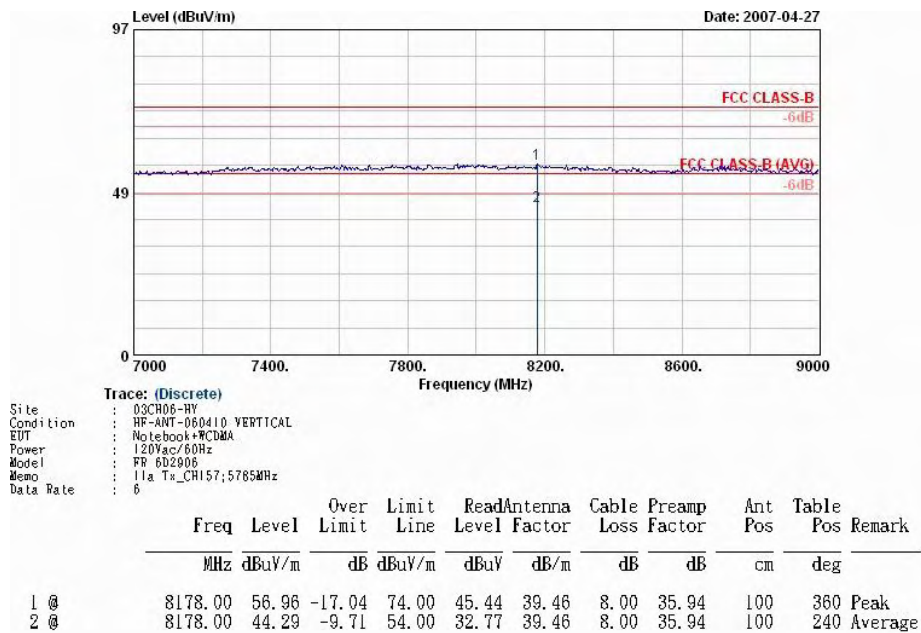

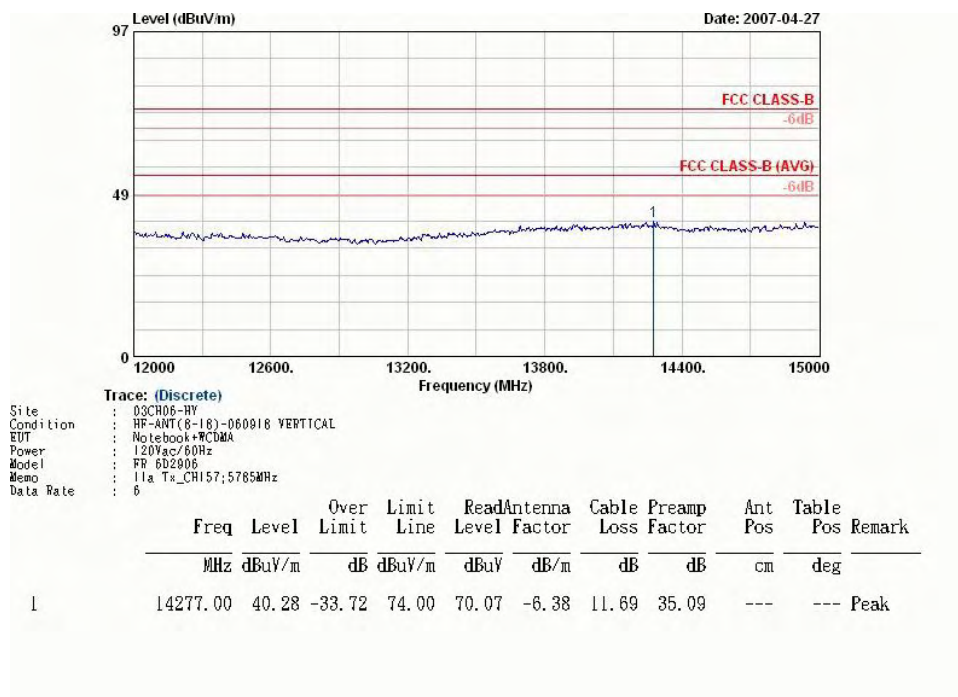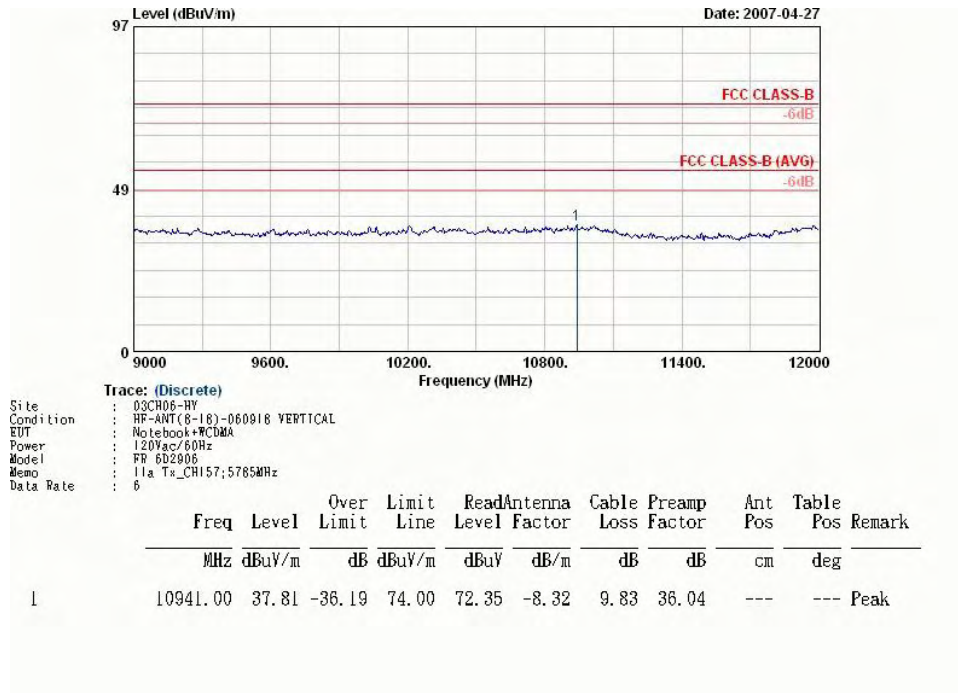


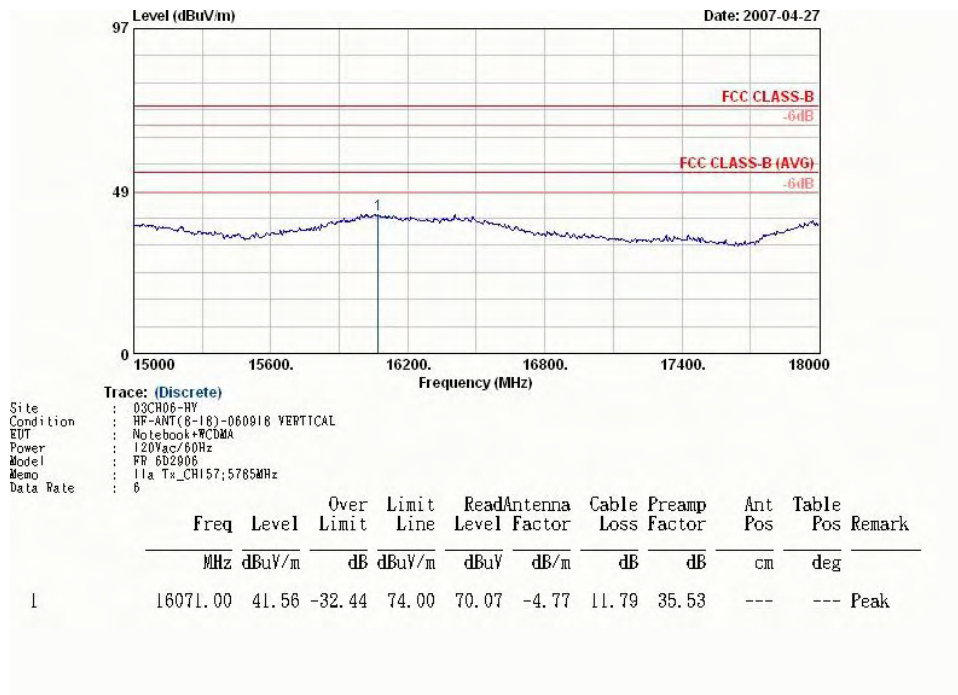


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.



- Test Mode : Mode 9
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

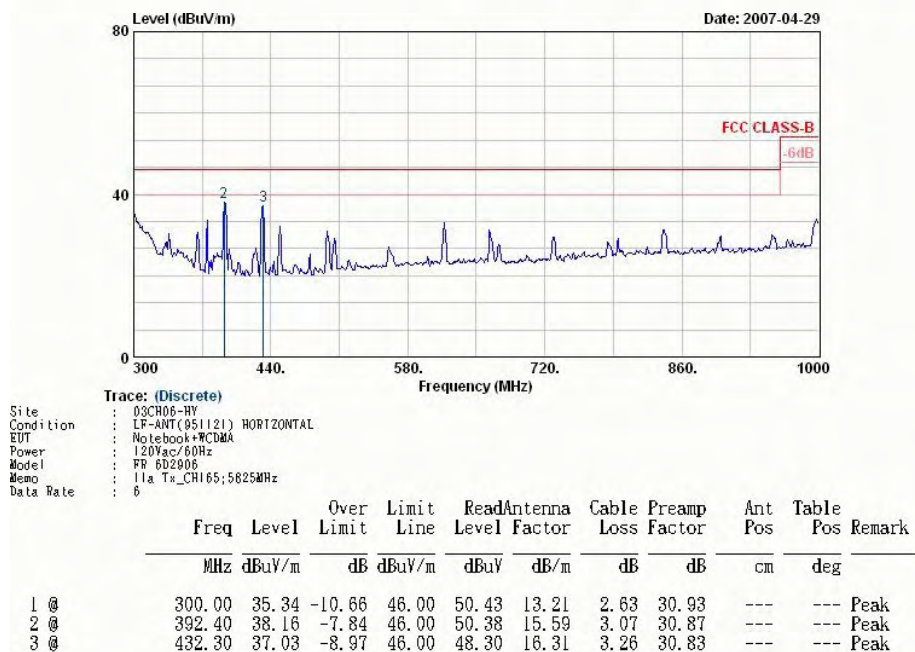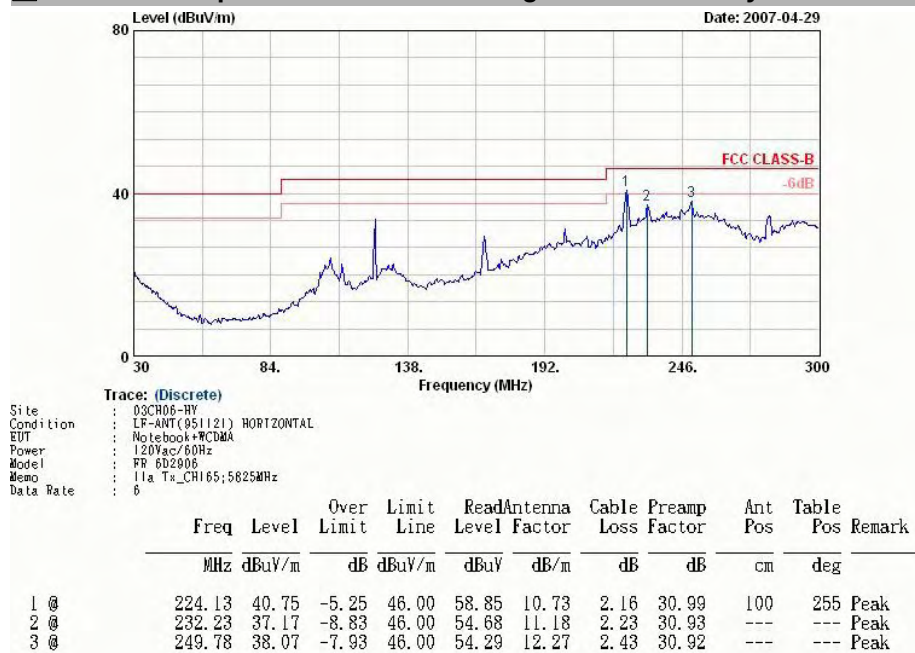




FCC / IC TEST REPORT

Report No. : FR6D2906-A

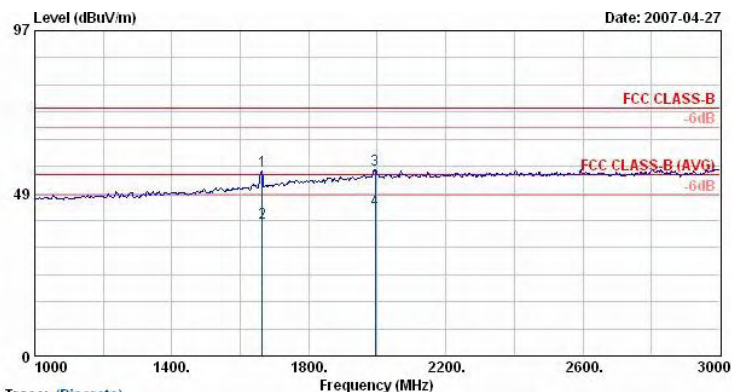


Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH165;5825MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	1664.00	55.02	-18.98	74.00	60.09	27.43	3.03	35.53	100	360 Peak
2 @	1664.00	39.54	-14.46	54.00	44.61	27.43	3.03	35.53	100	357 Average
3 @	1994.00	55.50	-18.50	74.00	57.40	29.97	3.30	35.17	100	360 Peak
4 @	1994.00	43.58	-10.42	54.00	45.48	29.97	3.30	35.17	100	64 Average

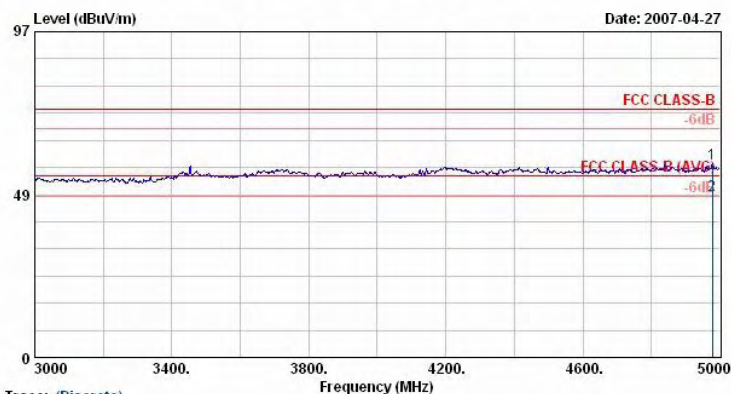


Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH165;5825MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	4978.00	57.59	-16.41	74.00	54.36	33.53	5.94	36.25	100	360 Peak
2 @	4978.00	48.35	-5.65	54.00	45.13	33.53	5.94	36.25	100	290 Average

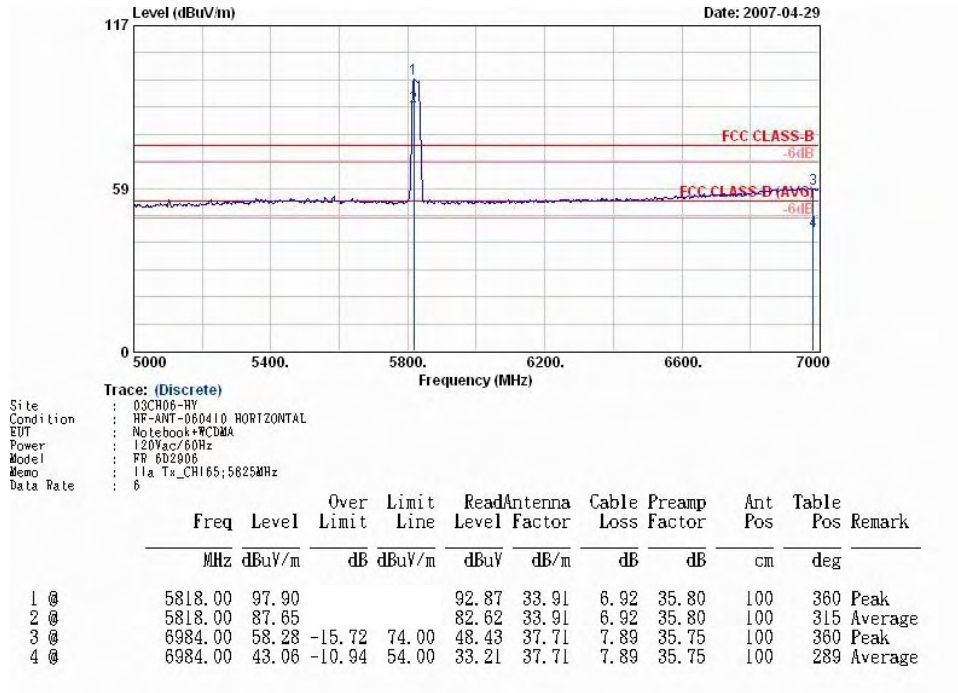



Remark: #1 and #2 Fundamental Signal

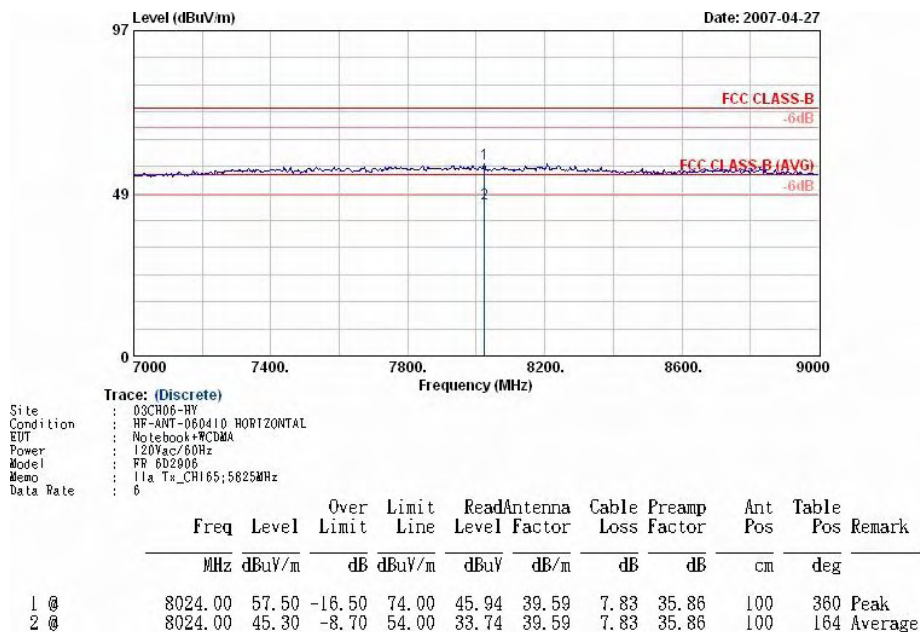



FCC / IC TEST REPORT


Report No. : FR6D2906-A

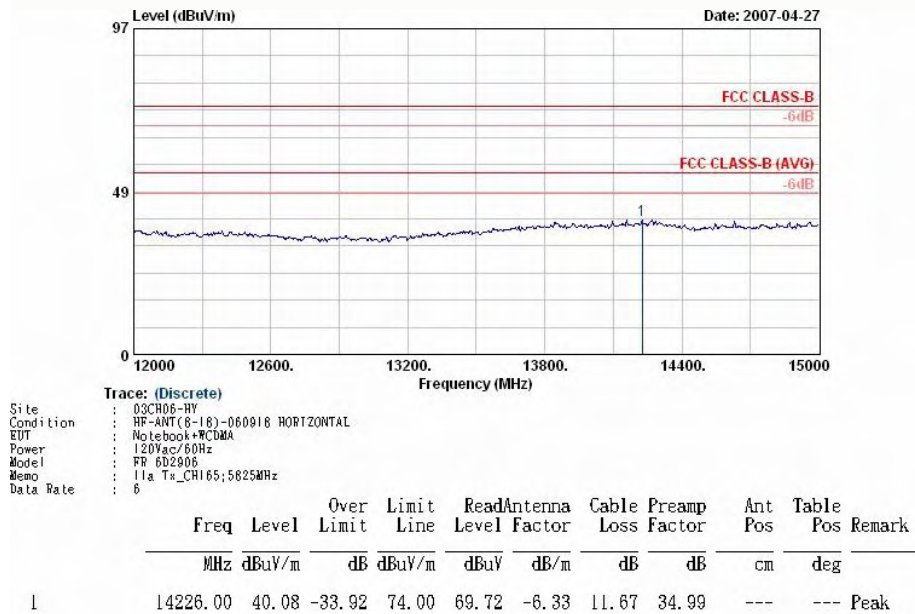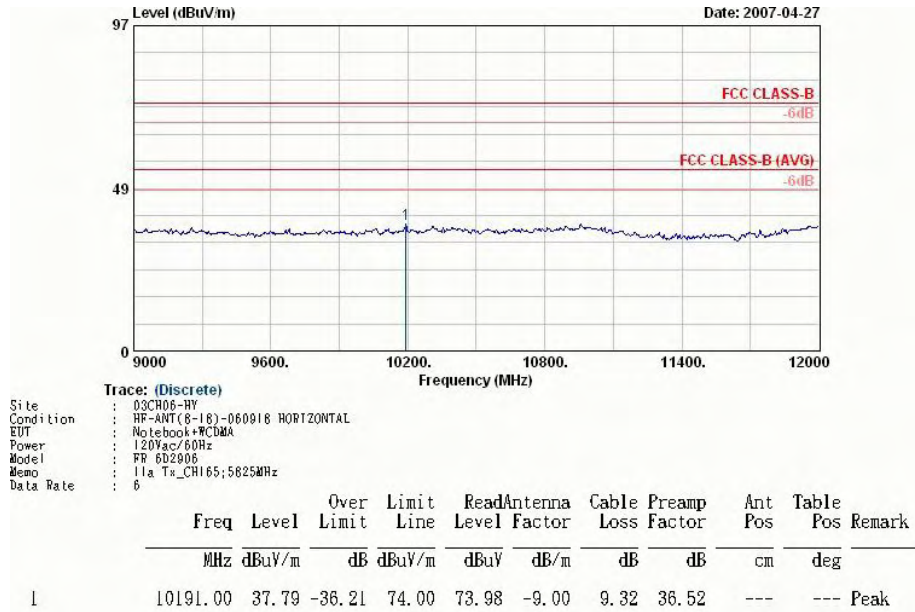



FCC / IC TEST REPORT



Report No. : FR6D2906-A


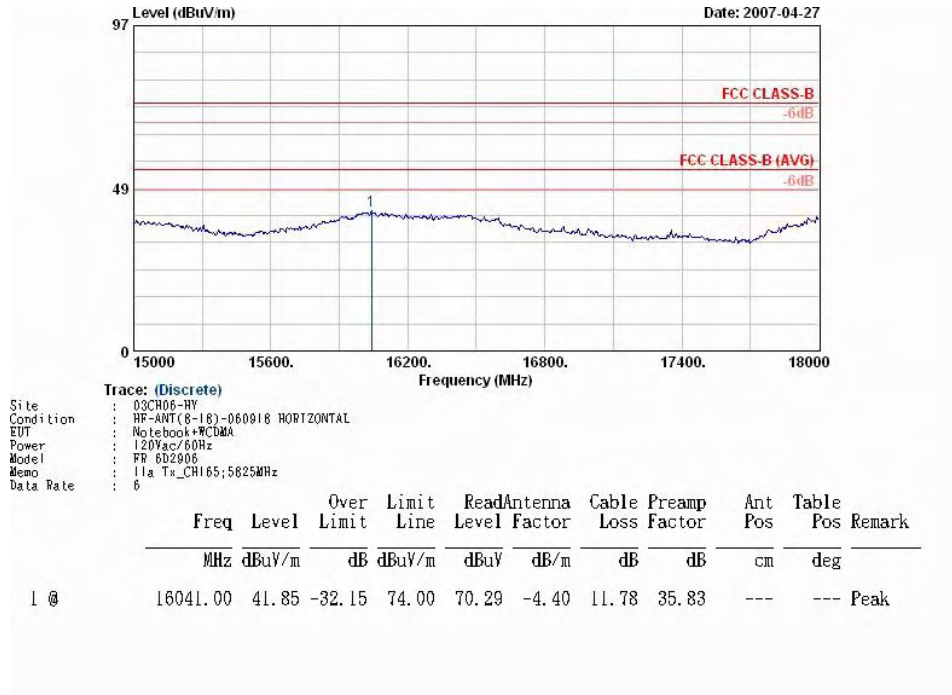





- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

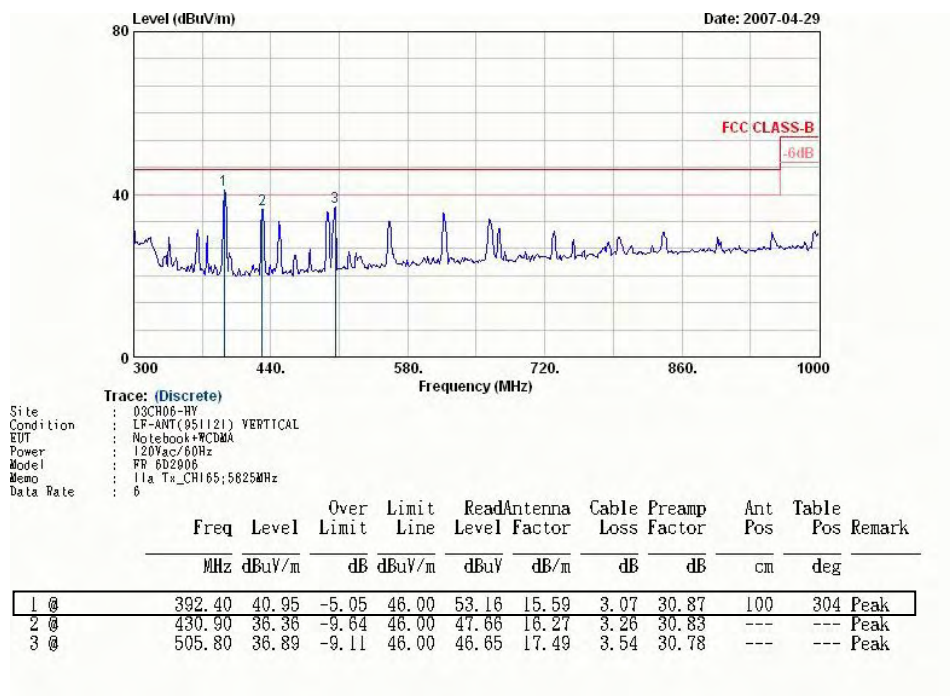
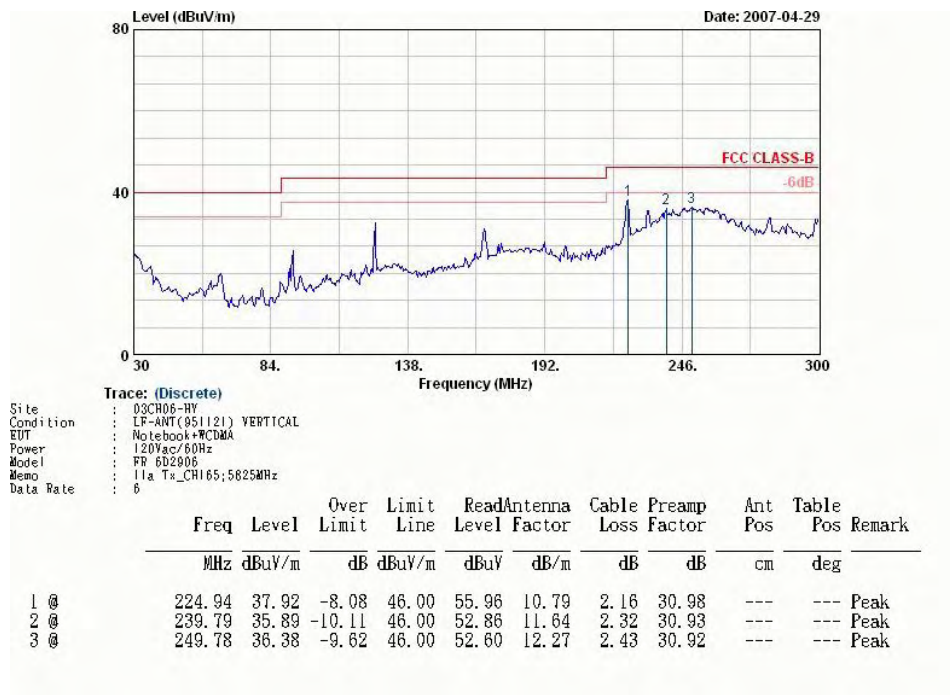


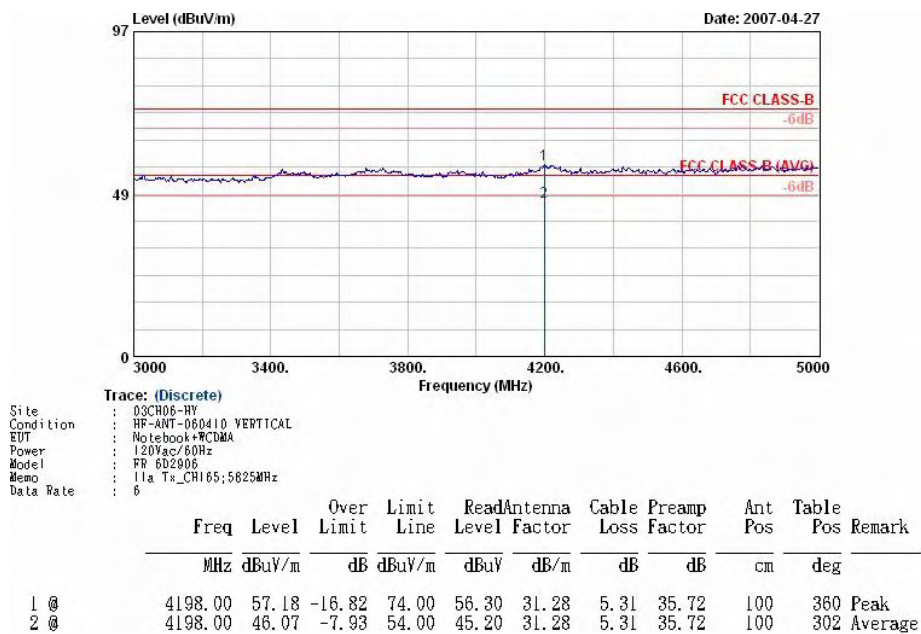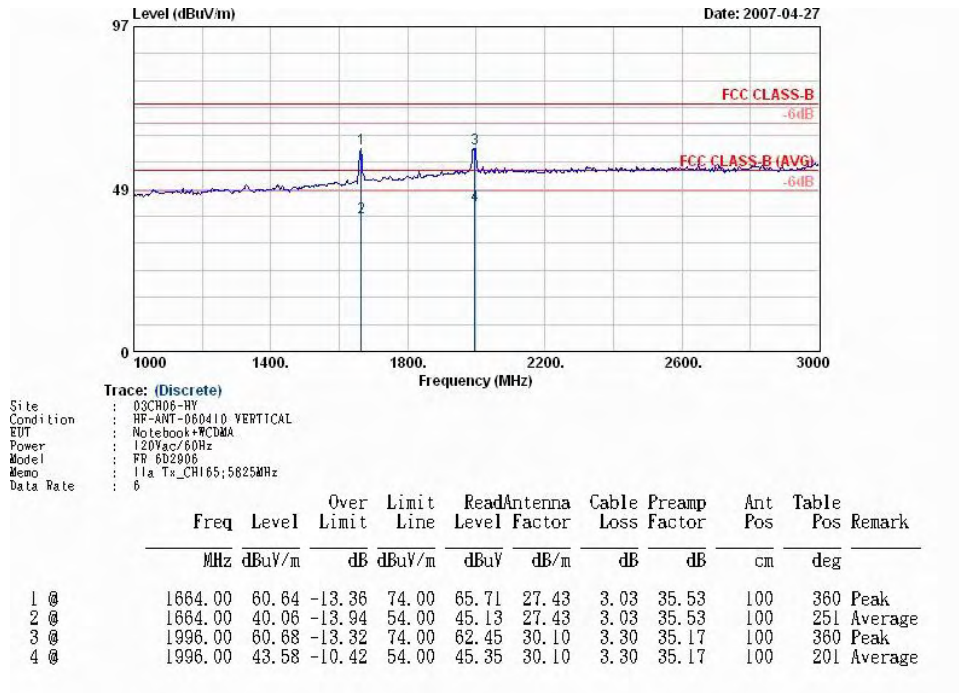


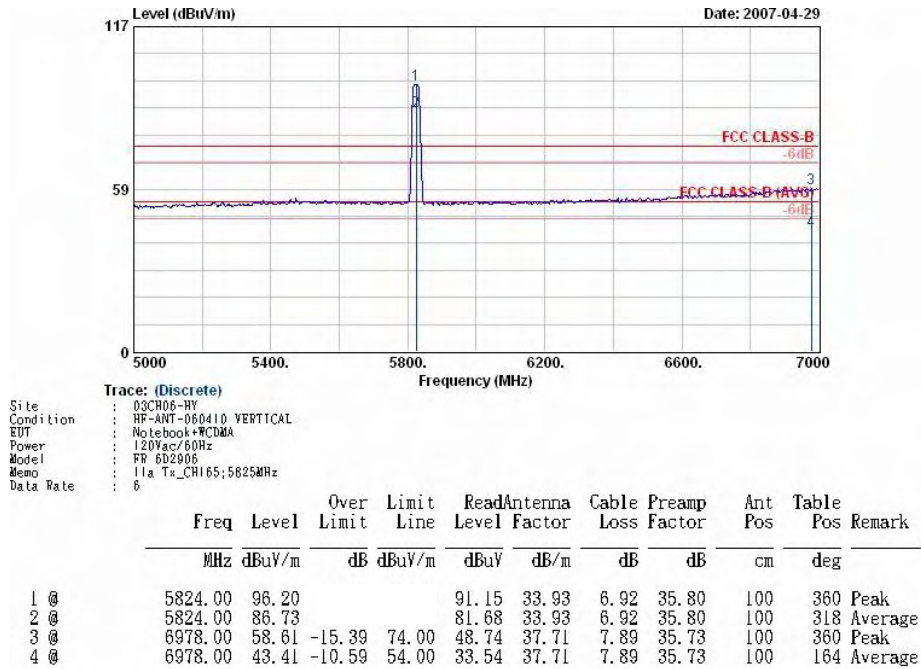

Remark: #1 and #2 Fundamental Signal

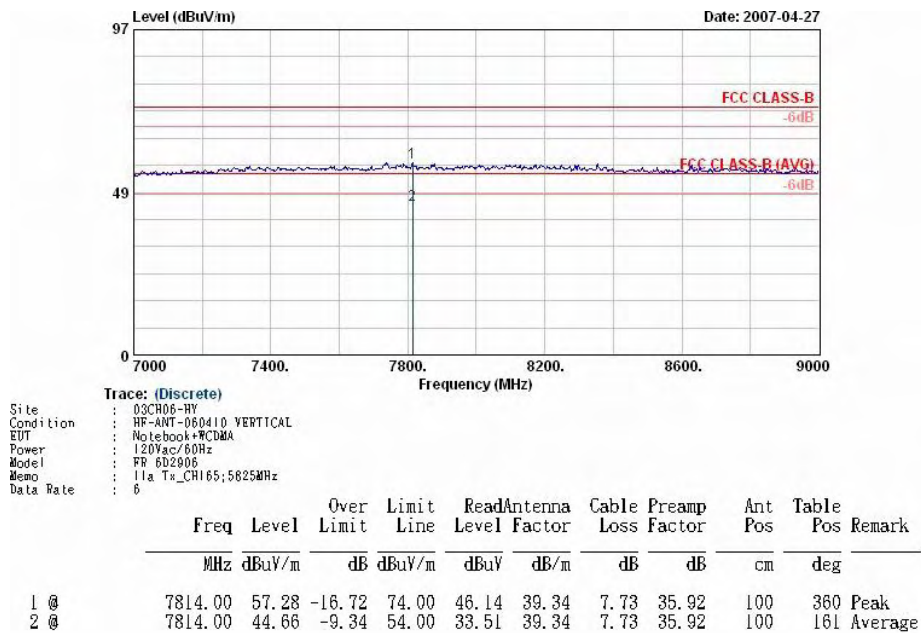

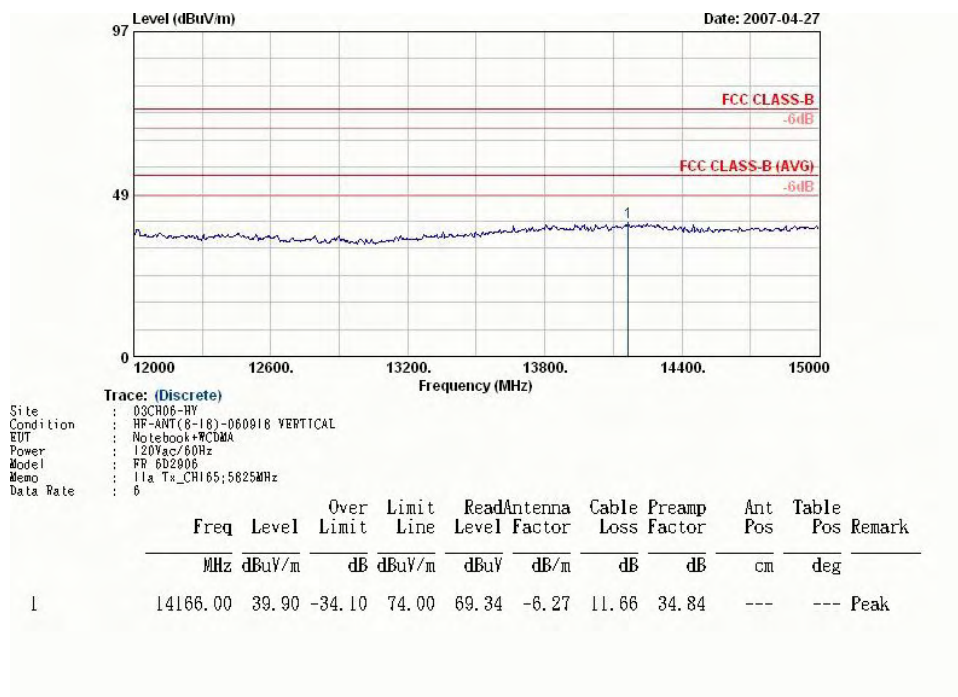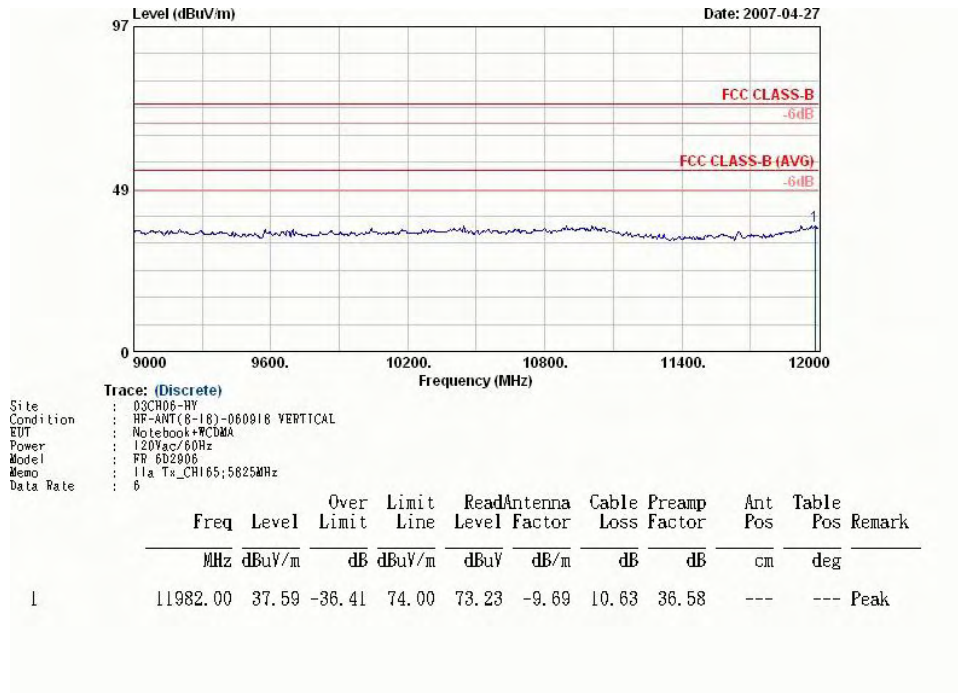

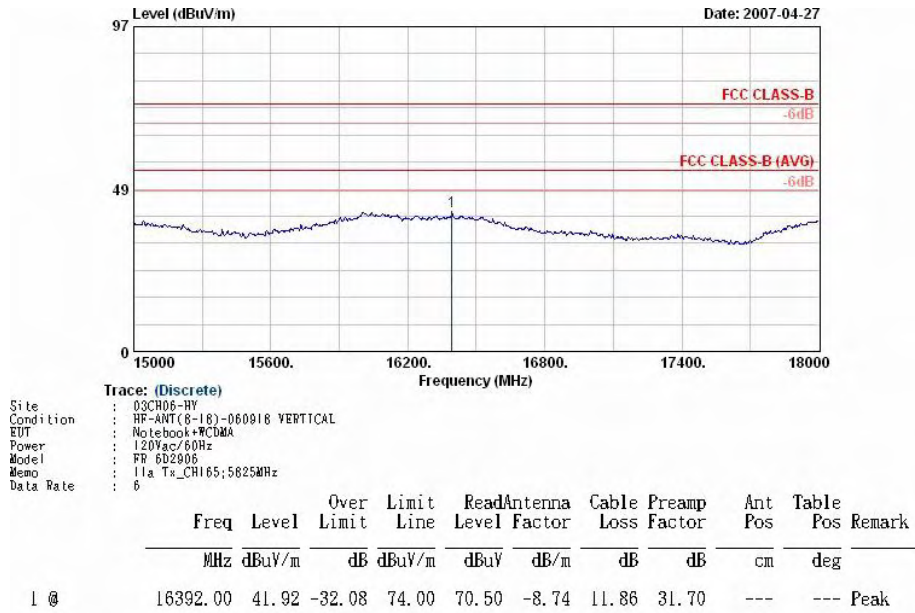


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 10
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

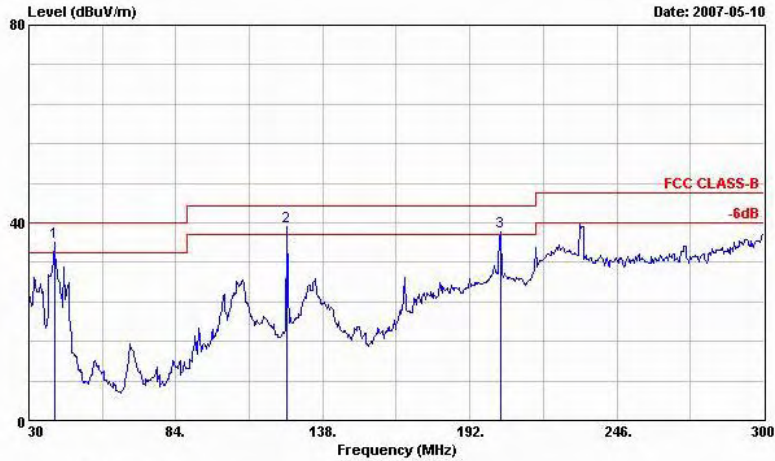

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	39.450	36.17	-3.83	40.00	56.54	11.82	0.71	32.90	100	347 Peak
2 !	124.770	39.13	-4.37	43.50	58.80	11.90	1.28	32.85	---	---
3 !	203.340	38.25	-5.25	43.50	60.36	9.02	1.63	32.76	---	---

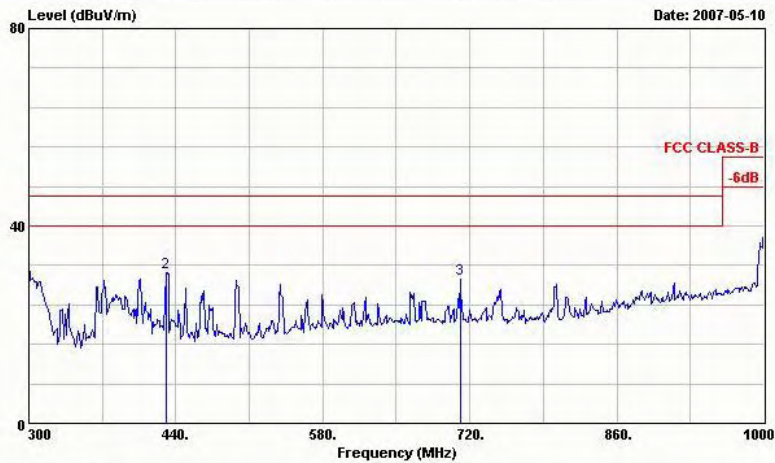


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	300.000	31.58	-14.42	46.00	50.05	12.31	2.03	32.81	---	---
2	430.900	30.56	-15.44	46.00	44.81	16.11	2.43	32.78	---	---
3	710.900	29.21	-16.79	46.00	37.94	20.11	3.16	31.99	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-A

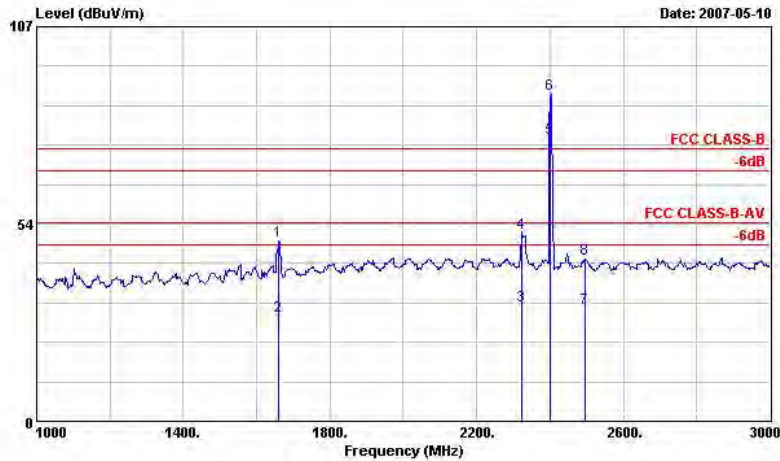

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1660.000	48.75	-25.25	74.00	50.91	28.57	2.97	33.70	100	0 Peak
2	1660.000	28.49	-25.51	54.00	30.65	28.57	2.97	33.70	100	94 Average
3	2324.000	31.25	-22.75	54.00	30.64	30.71	3.66	33.77	100	298 Average
4	2324.000	51.12	-22.88	74.00	50.51	30.71	3.66	33.77	100	0 Peak
5	2402.000	76.82			76.28	30.59	3.74	33.78	100	298 Average
6	2402.000	88.65			88.14	30.56	3.74	33.78	100	0 Peak
7	2494.000	30.77	-23.23	54.00	30.33	30.40	3.84	33.80	100	298 Average
8	2494.000	43.84	-30.16	74.00	43.40	30.40	3.84	33.80	100	0 Peak

Remark: #5 and #6 Fundamental Signal

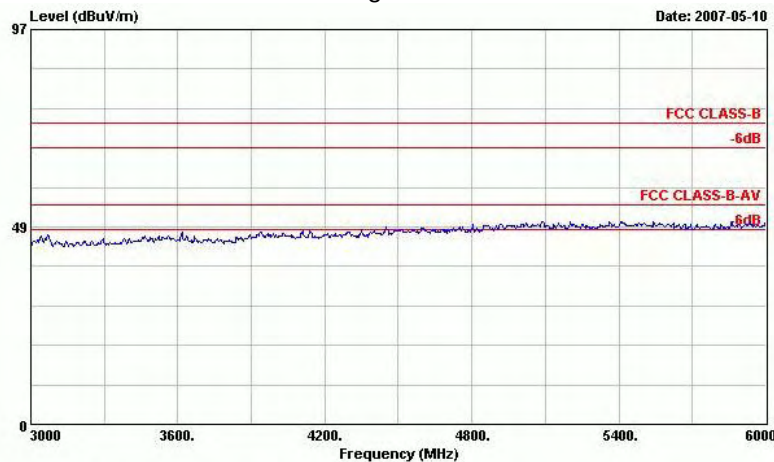


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5




FCC / IC TEST REPORT

Report No. : FR6D2906-A

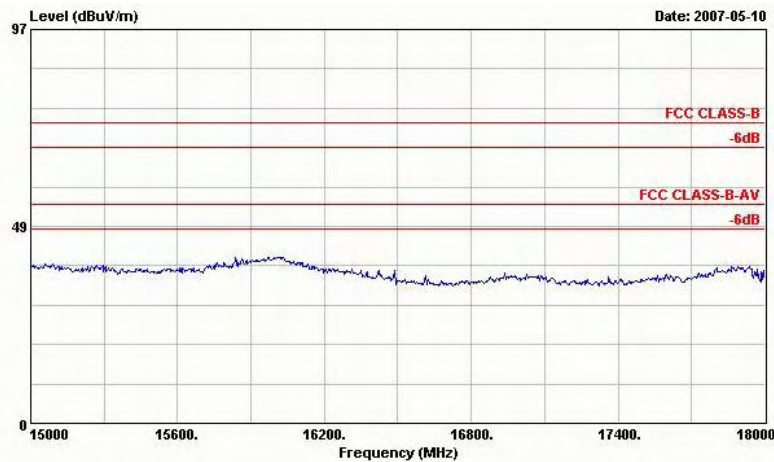

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

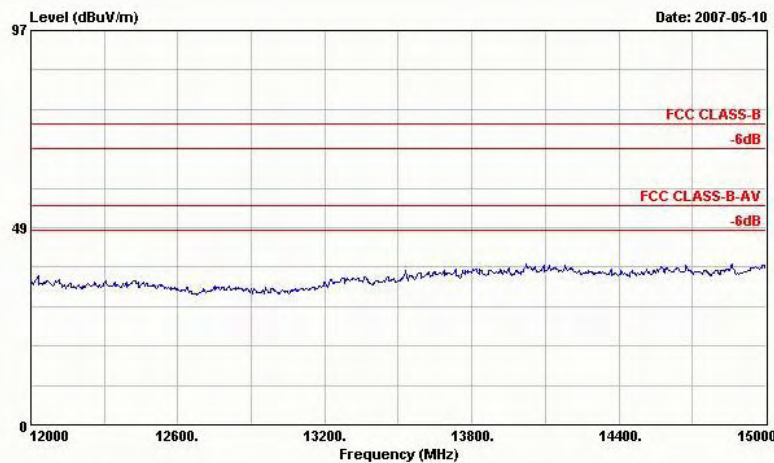


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-A

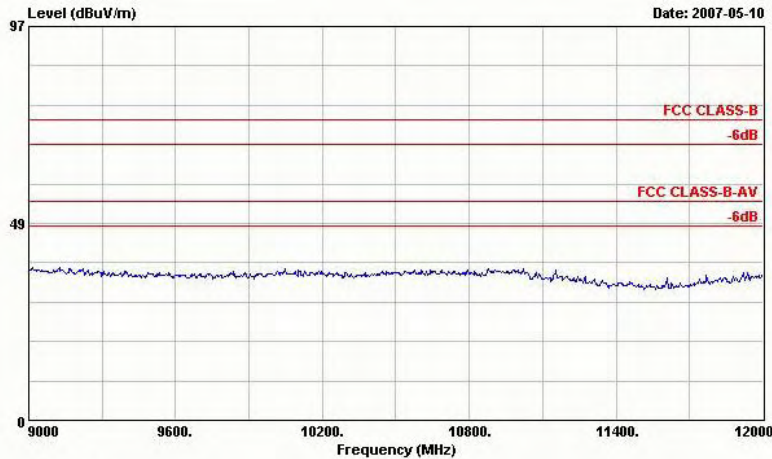

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

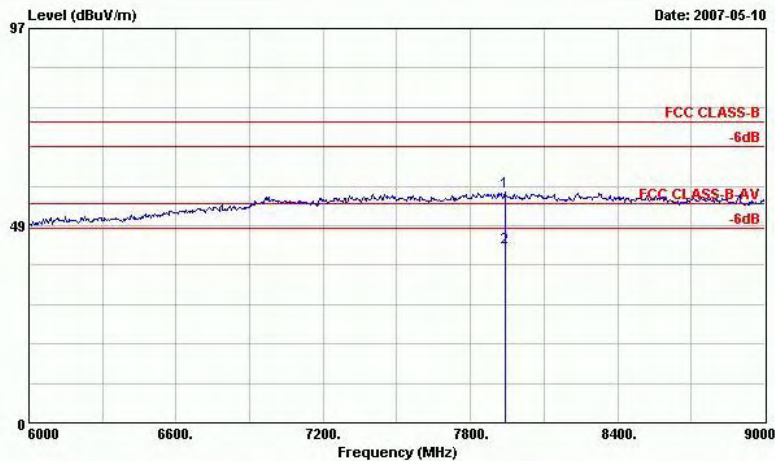


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	7941.000	56.72	-17.28	74.00	44.17	39.45	6.73	33.63	100	0 Peak
2	7941.000	43.08	-10.92	54.00	30.53	39.45	6.73	33.63	100	56 Average



FCC / IC TEST REPORT

Report No. : FR6D2906-A

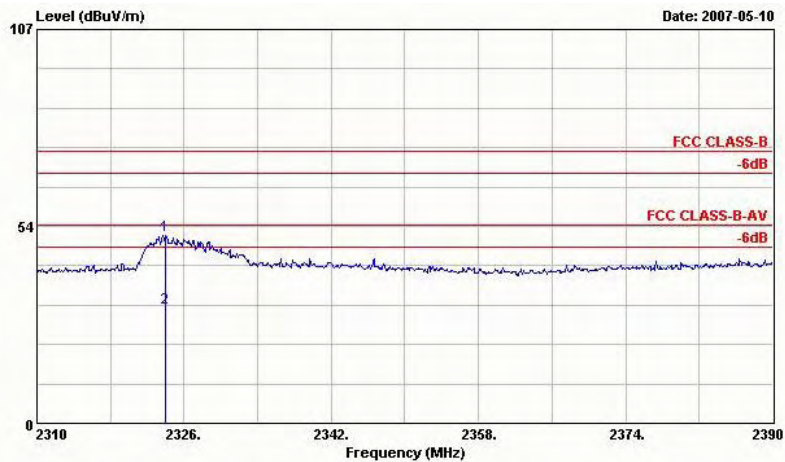


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00,2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV		dB	dB	cm	deg
1	2324.000	51.12	-22.88	74.00	50.51	30.71	3.66	33.77	100	0 Peak
2	2324.000	31.25	-22.75	54.00	30.64	30.71	3.66	33.77	100	298 Average




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

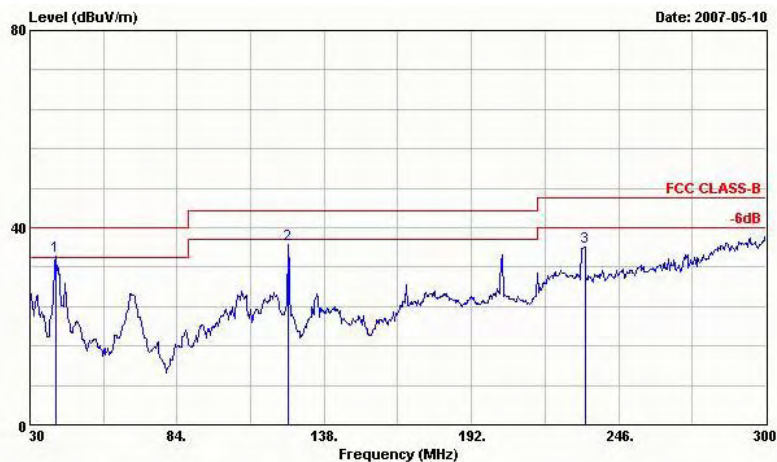

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	39.450	34.34	-5.66	40.00	54.71	11.82	0.71	32.90	107	148 Peak
2	124.770	36.57	-6.93	43.50	56.24	11.90	1.28	32.85	---	---
3	233.580	36.02	-9.98	46.00	55.74	11.31	1.80	32.84	---	---

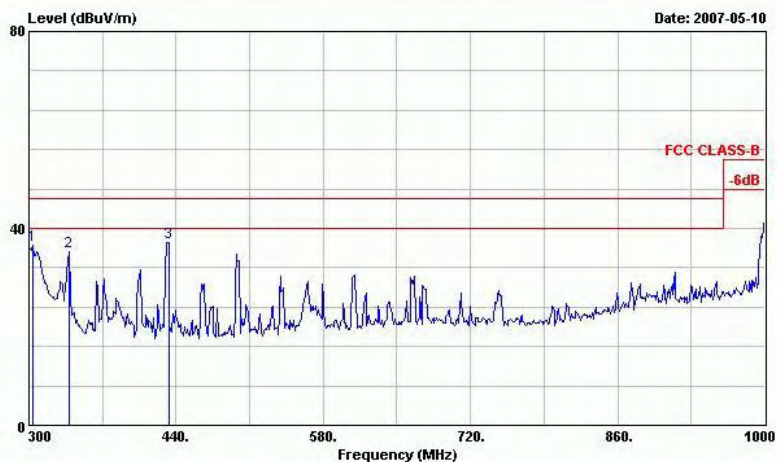


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	304.200	36.70	-9.30	46.00	55.00	12.48	2.04	32.81	---	---
2	337.800	35.16	-10.84	46.00	52.27	13.61	2.10	32.83	---	---
3	433.000	37.04	-8.96	46.00	51.25	16.13	2.43	32.78	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-A

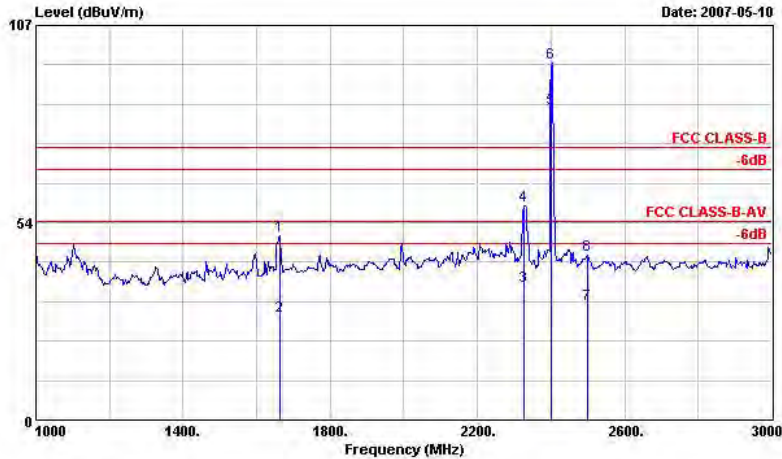

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1662.000	49.90	-24.10	74.00	52.06	28.57	2.97	33.70	100	0 Peak
2	1662.000	28.31	-25.69	54.00	30.47	28.57	2.97	33.70	100	271 Average
3	2326.000	36.12	-17.88	54.00	35.51	30.71	3.66	33.77	104	90 Average
4	2326.000	58.00	-16.00	74.00	57.39	30.71	3.66	33.77	100	0 Peak
5 @	2402.000	84.56			84.02	30.59	3.74	33.78	104	90 Average
6 @	2402.000	96.81			96.30	30.56	3.74	33.78	100	0 Peak
7	2500.000	31.29	-22.71	54.00	30.85	30.40	3.84	33.80	104	90 Average
8	2500.000	44.55	-29.45	74.00	44.11	30.40	3.84	33.80	100	0 Peak

Remark: #5 and #6 Fundamental Signal

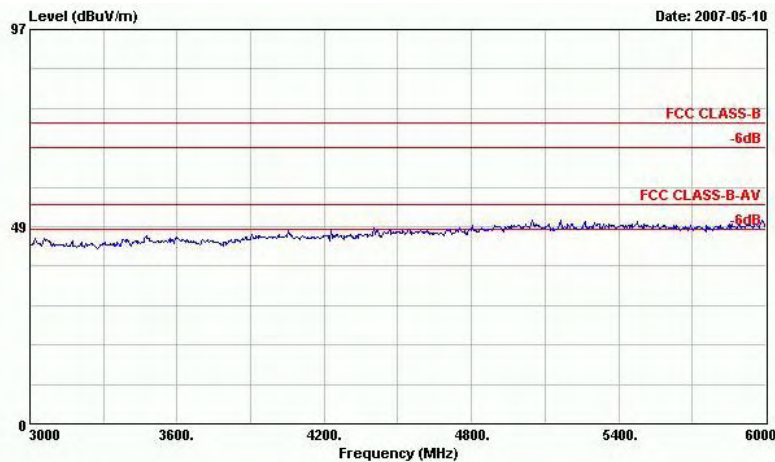


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-A

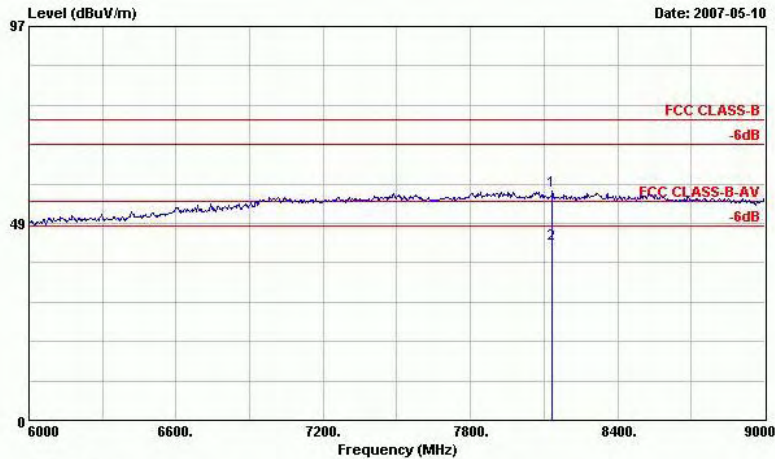

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					Factor					
					dB		dB		cm	deg
1	8133.000	56.37	-17.63	74.00	43.91	39.44	6.82	33.81	100	0 Peak
2	8133.000	43.52	-10.48	54.00	31.06	39.44	6.82	33.81	103	296 Average

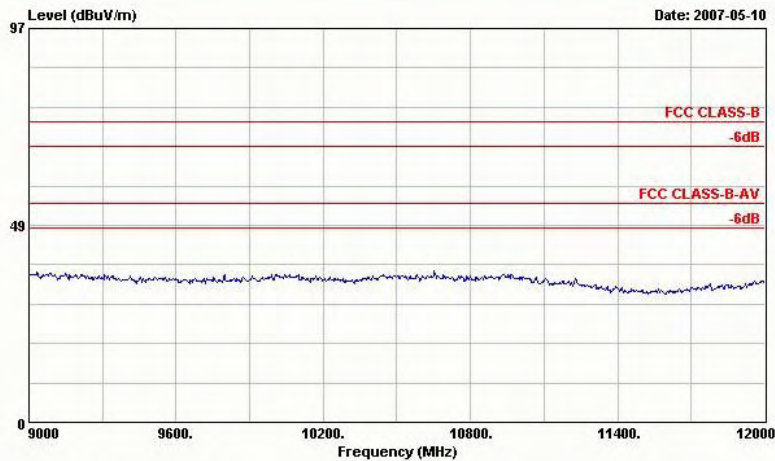


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT


Report No. : FR6D2906-A

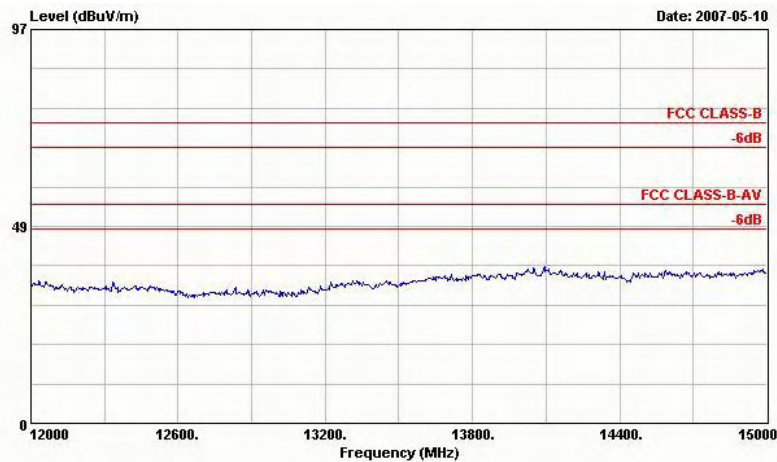

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

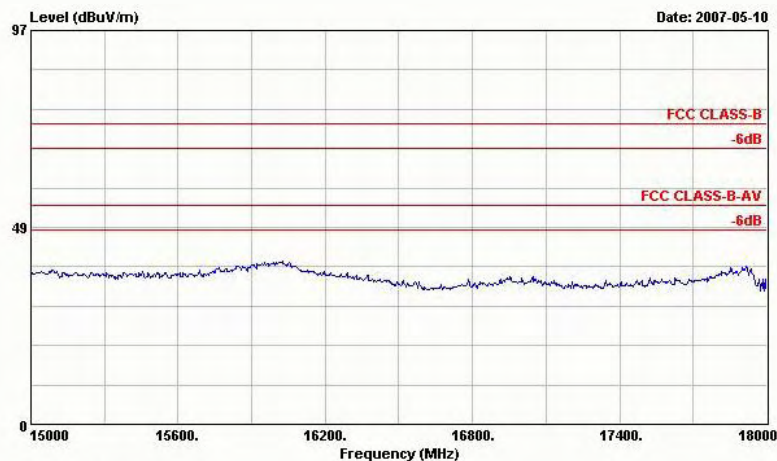

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

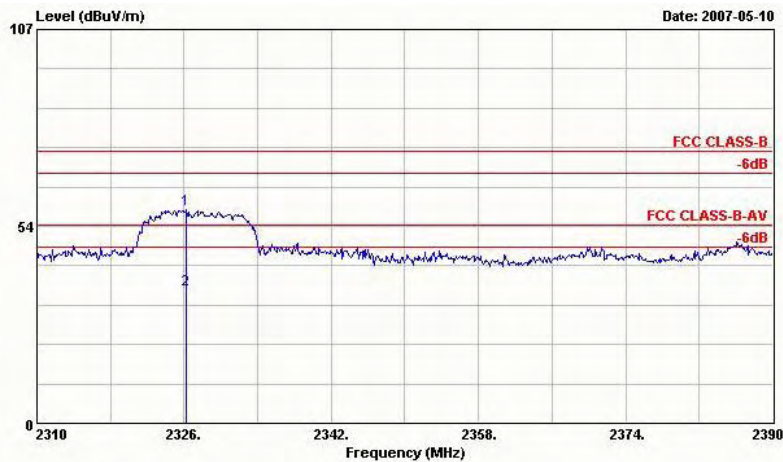

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2326.240	58.00	-16.00	74.00	57.39	30.71	3.66	33.77	100	0 Peak
2	2326.240	36.12	-17.88	54.00	35.51	30.71	3.66	33.77	104	90 Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 11
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

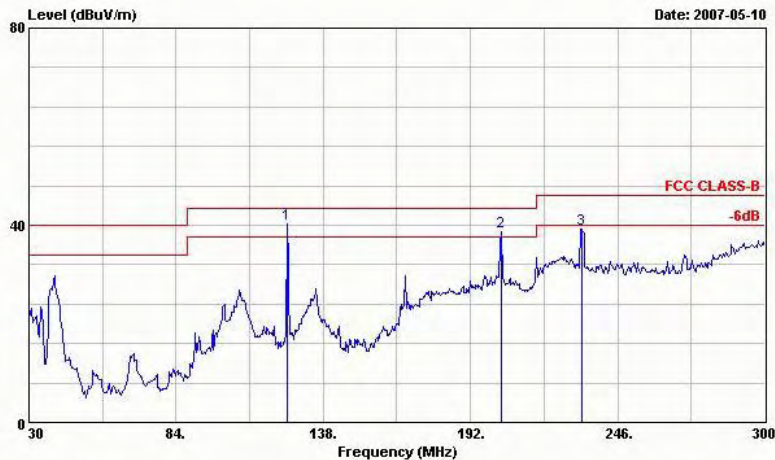

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	124.770	40.20	-3.30	43.50	59.87	11.90	1.28	32.85	105	223 Peak
2 @	203.340	38.56	-4.94	43.50	60.67	9.02	1.63	32.76	---	Peak
3 @	232.770	39.13	-6.87	46.00	58.93	11.24	1.80	32.84	---	Peak

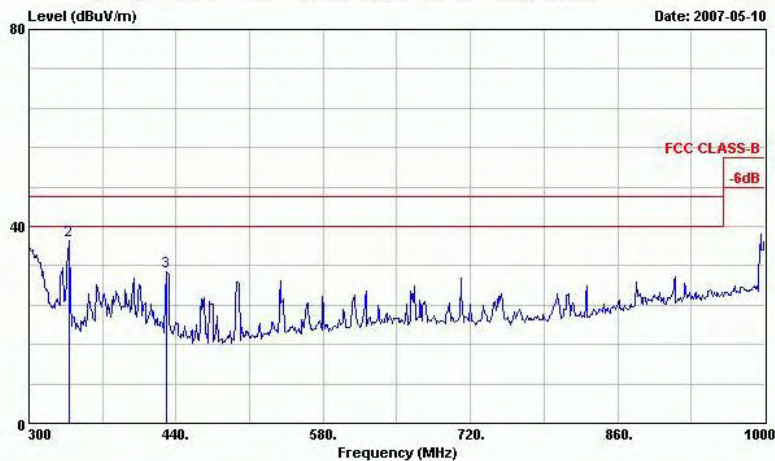


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	300.000	36.02	-9.98	46.00	54.49	12.31	2.03	32.81	---	Peak
2 @	337.800	36.98	-9.02	46.00	54.09	13.61	2.10	32.83	---	Peak
3 @	430.900	30.66	-15.34	46.00	44.91	16.11	2.43	32.78	---	Peak



FCC / IC TEST REPORT


Report No. : FR6D2906-A

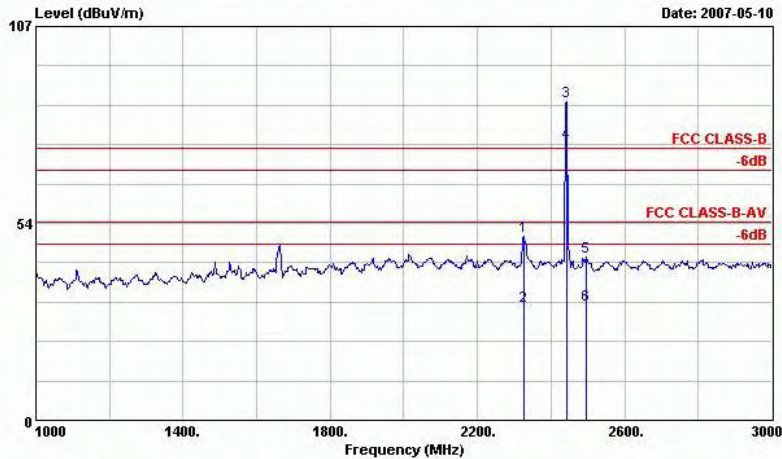

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2326.000	49.92	-24.08	74.00	49.31	30.71	3.66	33.77	100	0 Peak
2 @	2326.000	30.91	-23.09	54.00	30.30	30.71	3.66	33.77	100	277 Average
3 @	2441.000	86.52			86.03	30.49	3.79	33.79	100	0 Peak
4 @	2441.000	75.46			74.97	30.49	3.79	33.79	100	277 Average
5 @	2494.000	44.38	-29.62	74.00	43.94	30.40	3.84	33.80	100	0 Peak
6 @	2494.000	31.25	-22.75	54.00	30.81	30.40	3.84	33.80	100	277 Average

Remark: #3 and #4 Fundamental Signal

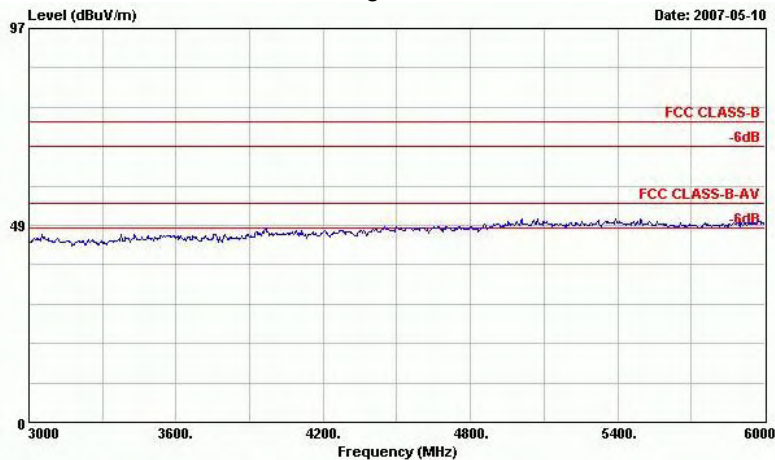

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS