





Label Location

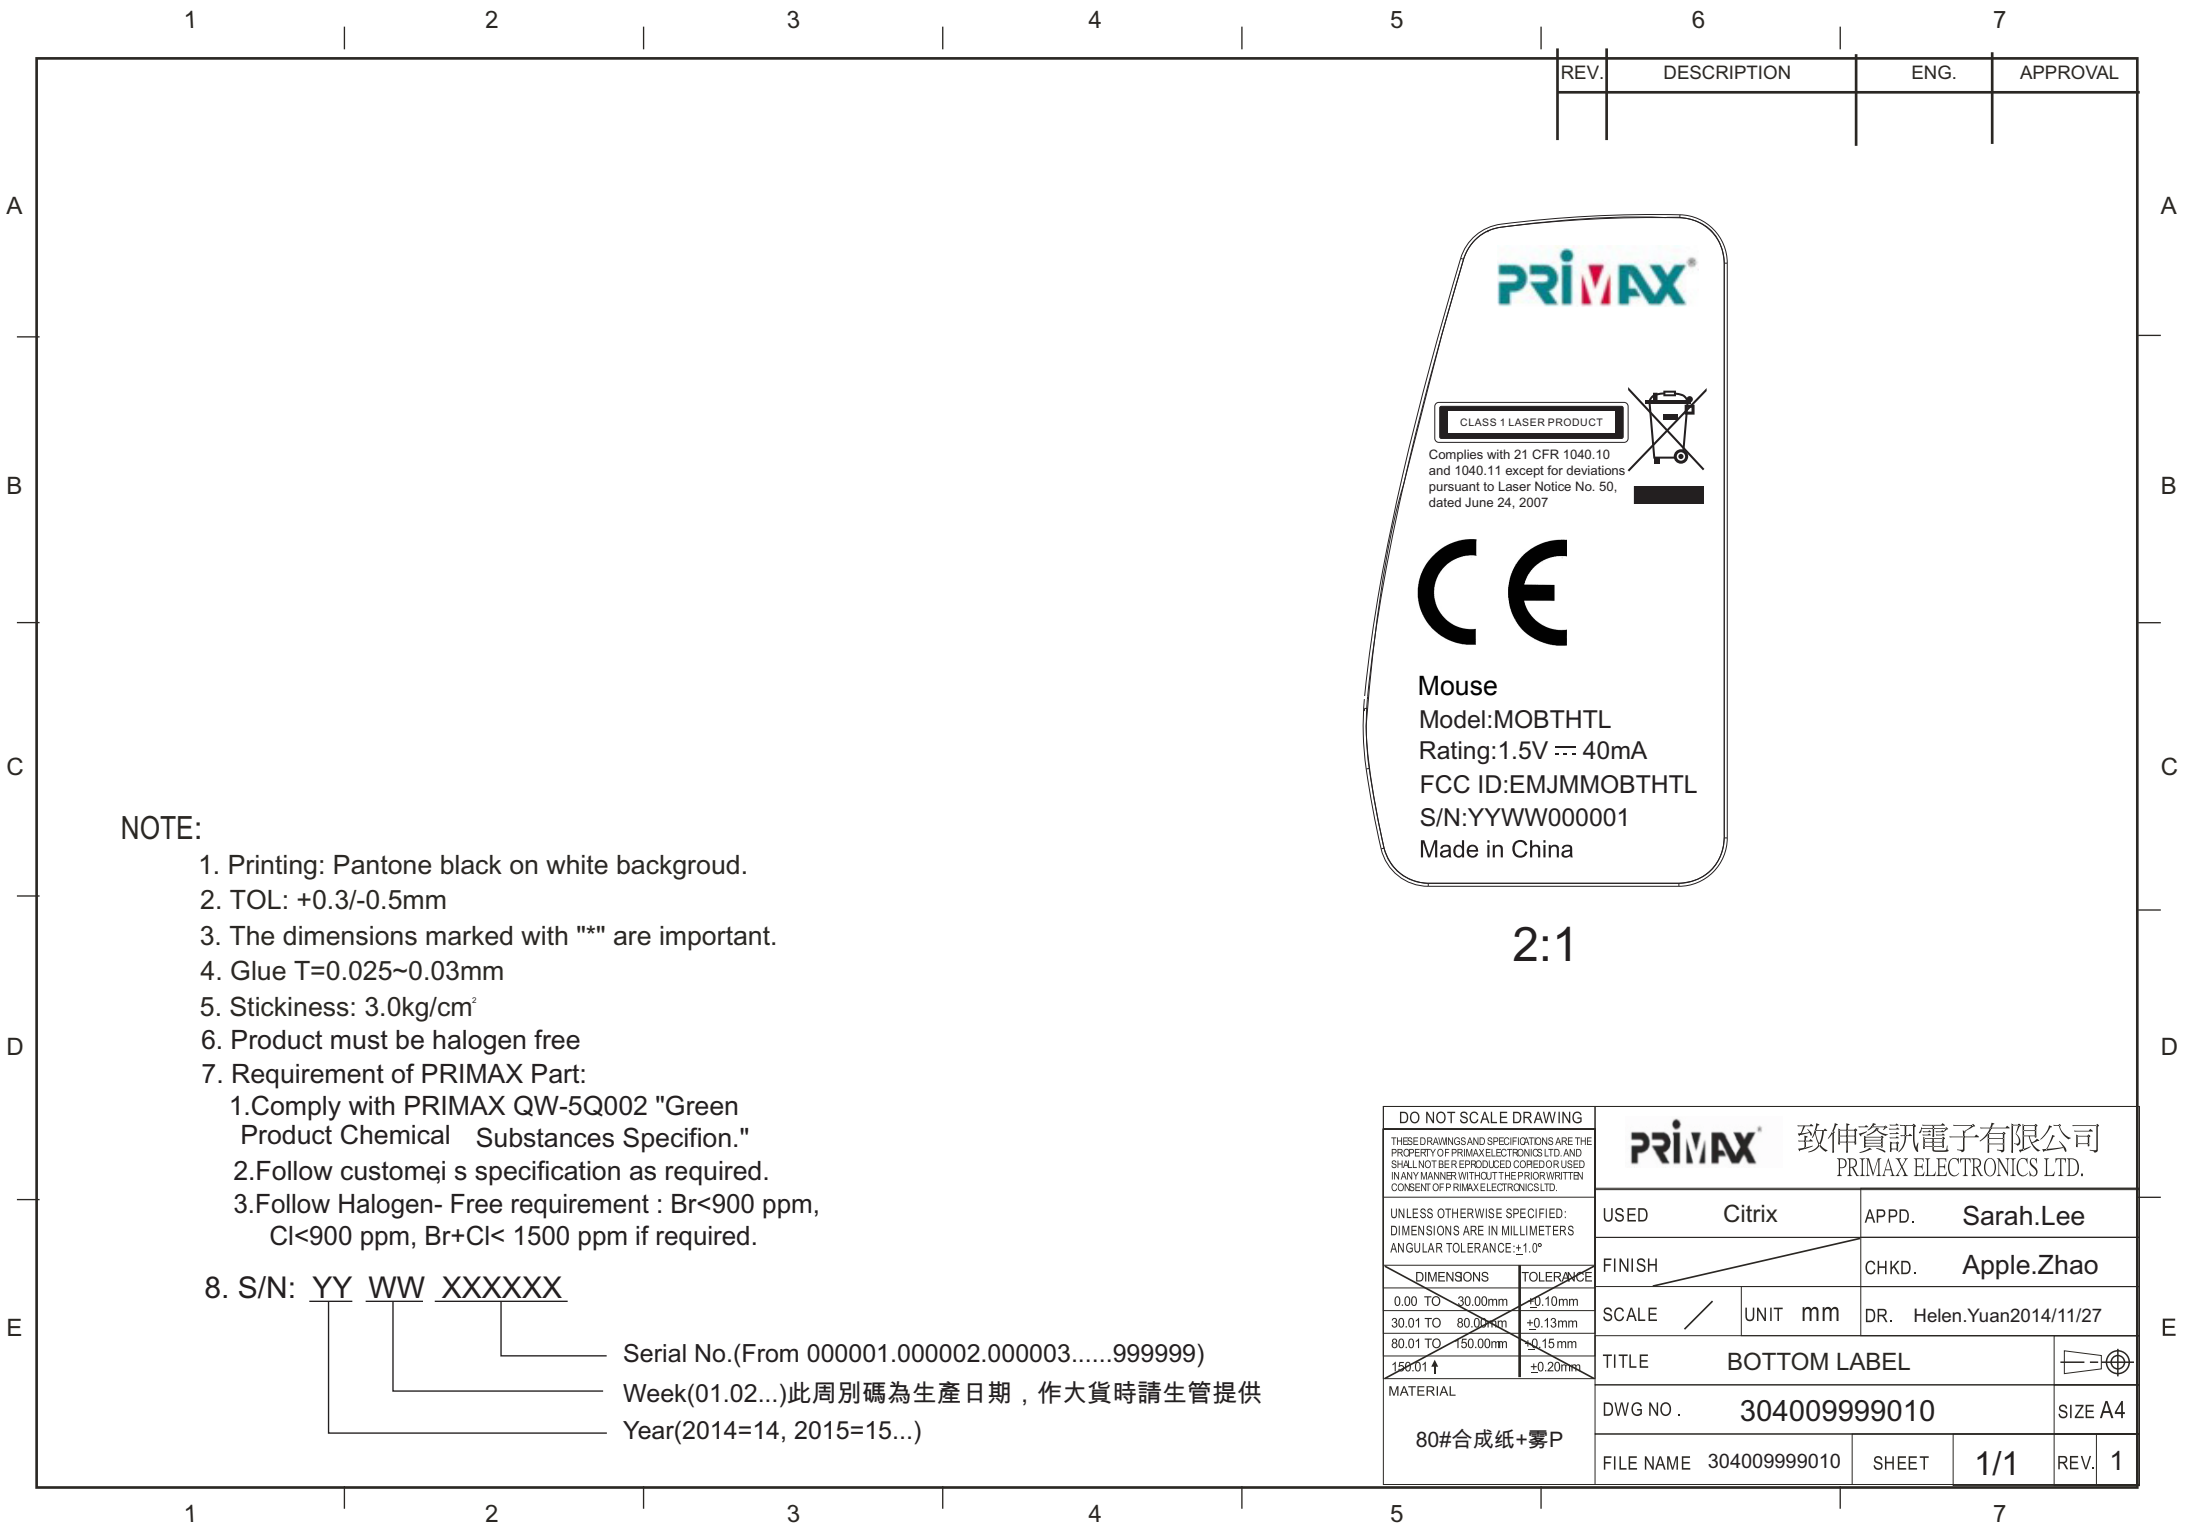

REV.	DESCRIPTION	ENG.	APPROVAL

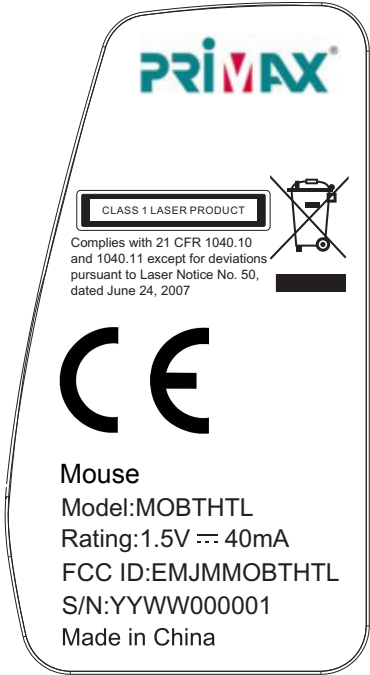

2:1

NOTE:

- 1. Printing: Pantone black on white backgroud.
- 2. TOL: +0.3/-0.5mm
- 3. The dimensions marked with "*" are important.
- 4. Glue T=0.025~0.03mm
- 5. Stickiness: 3.0kg/cm²
- 6. Product must be halogen free
- 7. Requirement of PRIMAX Part:
 - 1.Comply with PRIMAX QW-5Q002 "Green Product Chemical Substances Specifion."
 - 2.Follow customej s specification as required.
 - 3.Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
- 8. S/N: YY WW XXXXXX
 - Serial No.(From 000001.000002.000003.....999999)
 - Week(01.02...)此周別碼為生產日期，作大貨時請生管提供
 - Year(2014=14, 2015=15...)

DO NOT SCALE DRAWING		PRIMAX [®]		致伸資訊電子有限公司											
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		PRIMAX ELECTRONICS LTD.													
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		USED Citrix		APPD.	Sarah.Lee										
		FINISH		CHKD.	Apple.Zhao										
<table><tr><th>DIMENSIONS</th><th>TOLERANCE</th></tr><tr><td>0.00 TO 30.00mm</td><td>±0.10mm</td></tr><tr><td>30.01 TO 80.00mm</td><td>±0.13mm</td></tr><tr><td>80.01 TO 150.00mm</td><td>±0.15mm</td></tr><tr><td>150.01 ↑</td><td>±0.20mm</td></tr></table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01 ↑	±0.20mm	SCALE /	UNIT mm	DR. Helen.Yuan2014/11/27	
DIMENSIONS	TOLERANCE														
0.00 TO 30.00mm	±0.10mm														
30.01 TO 80.00mm	±0.13mm														
80.01 TO 150.00mm	±0.15mm														
150.01 ↑	±0.20mm														
MATERIAL 80#合成紙+霧P		TITLE BOTTOM LABEL													
		DWG NO. 304009999010			SIZE A4										
		FILE NAME 304009999010	SHEET	1/1	REV. 1										