

FCC TEST REPORT

REPORT NO.: RF930518L06C

MODEL NO.: NTR-010(USA)

RECEIVED: Oct. 15, 2004

TESTED: Oct. 15 , 2004 ~ Oct. 12, 2005

ISSUED: Oct. 13, 2005

APPLICANT: Buffalo Inc.

ADDRESS: 4-15, Shibata Hondori, Minami-ku, Nagoya
457-8520, Japan

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 73 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.2.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	27
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	27
4.2.2	TEST INSTRUMENTS	28
4.2.3	TEST PROCEDURES	29
4.2.4	DEVIATION FROM TEST STANDARD	29
4.2.5	TEST SETUP	30
4.2.6	EUT OPERATING CONDITIONS	30
4.2.7	TEST RESULTS	31
4.3	6dB BANDWIDTH MEASUREMENT	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2	TEST INSTRUMENTS	39
4.3.3	TEST PROCEDURE	40
4.3.4	DEVIATION FROM TEST STANDARD	40
4.3.5	TEST SETUP	40
4.3.6	EUT OPERATING CONDITIONS	40
4.3.7	TEST RESULTS	41



4.4	MAXIMUM PEAK OUTPUT POWER.....	47
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47
4.4.2	TEST INSTRUMENTS.....	47
4.4.3	TEST PROCEDURES	48
4.4.4	DEVIATION FROM TEST STANDARD	48
4.4.5	TEST SETUP	48
4.4.6	EUT OPERATING CONDITIONS	48
4.4.7	TEST RESULTS	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	50
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2	TEST INSTRUMENTS.....	50
4.5.3	TEST PROCEDURE	51
4.5.4	DEVIATION FROM TEST STANDARD	51
4.5.5	TEST SETUP	51
4.5.6	EUT OPERATING CONDITIONS	51
4.5.7	TEST RESULTS	52
4.6	BAND EDGES MEASUREMENT.....	58
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE	58
4.6.4	DEVIATION FROM TEST STANDARD	58
4.6.5	EUT OPERATING CONDITION.....	58
4.6.6	TEST RESULTS	59
4.7	ANTENNA REQUIREMENT	67
4.7.1	STANDARD APPLICABLE	67
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	67
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	68
6	INFORMATION ON THE TESTING LABORATORIES	72
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT : Nintendo Wi-Fi USB Connector
BRAND NAME : Nintendo
MODEL NO. : NTR-010(USA)
APPLICANT : Buffalo Inc.
TESTED : Oct. 15 , 2004 ~ Oct. 12, 2005
TEST SAMPLE : Engineering Sample
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model no.: NTR-010(USA)) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Oct. 13, 2005
(Wendy Liao)

TECHNICAL

ACCEPTANCE : Gary Chang , **DATE:** Oct. 13, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Oct. 13, 2005
(Cody Chang, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.26dB at 0.663MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.04dB at 2786.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Nintendo Wi-Fi USB Connector
MODEL NO.	NTR-010(USA)
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	38.194mW
ANTENNA TYPE	Printed inverted F antenna with 1dBi gain
DATA CABLE	0.5m USB shielded cable without core
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The client added the USB cable for test and recorded the test data in the test report.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Mode A

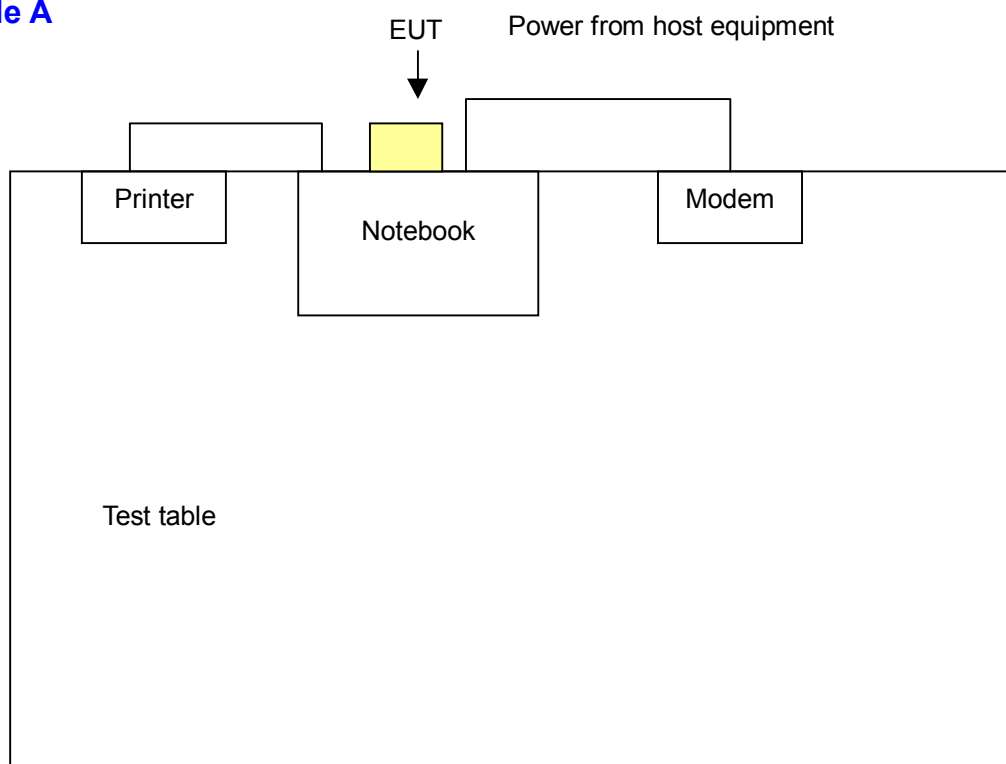

Mode B

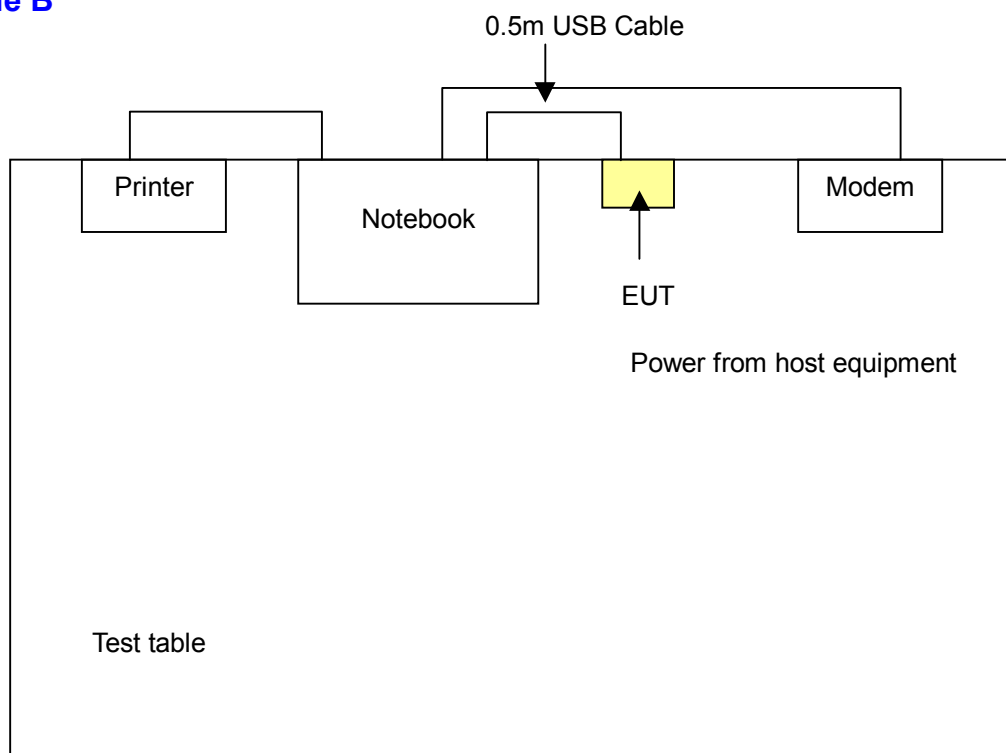

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Without USB Cable
B	√	√	-	-	With USB Cable

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note: “_” No effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	NOTEBOOK COMPUTER	DELL	PP05L	18661245328	E2K24CLNS
3	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
4	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.2m shielded cable without core
4	1.2m shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

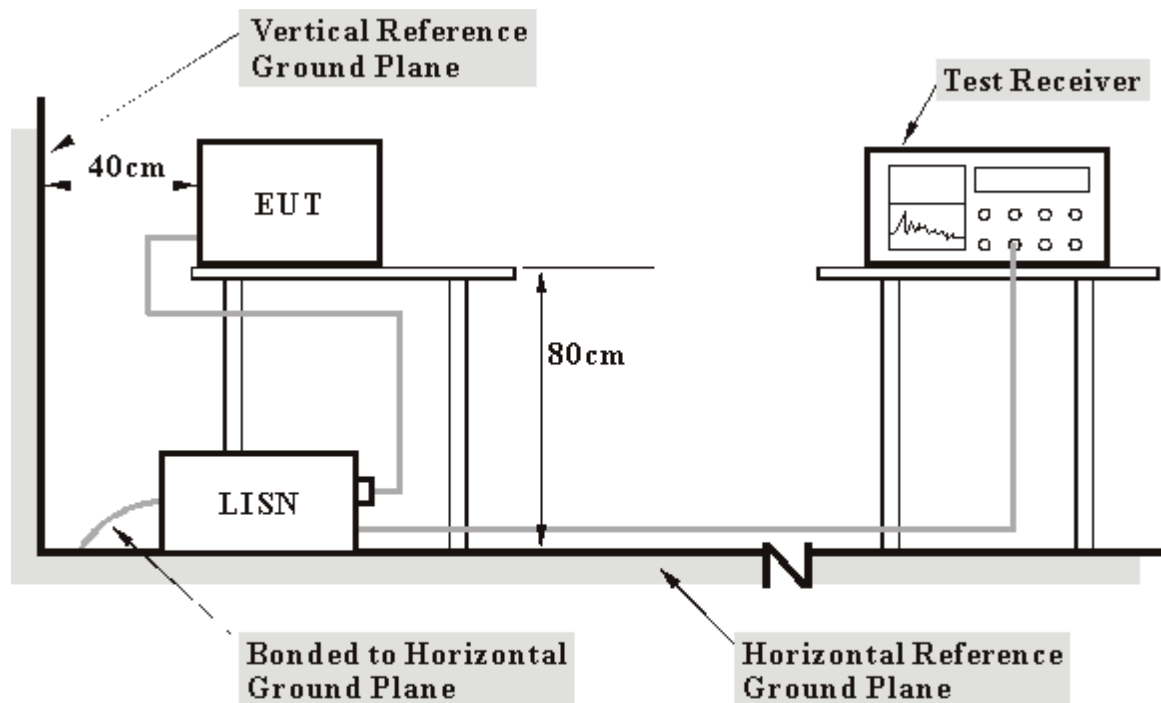

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

Mode A & Mode B

- Connected the EUT to a notebook system placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to modem.
- The notebook system sent "H" messages to printer, and the printer printed them on paper.
- Steps c ~ e were repeated.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	48.06	-	48.16	-	64.98	54.98	-16.82	-
2	0.205	0.10	48.95	-	49.05	-	63.42	53.42	-14.37	-
3	0.306	0.11	34.71	-	34.82	-	60.07	50.07	-25.25	-
4	1.875	0.26	31.58	-	31.84	-	56.00	46.00	-24.16	-
5	3.605	0.30	26.70	-	27.00	-	56.00	46.00	-29.00	-
6	9.594	0.52	33.05	-	33.57	-	60.00	50.00	-26.43	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

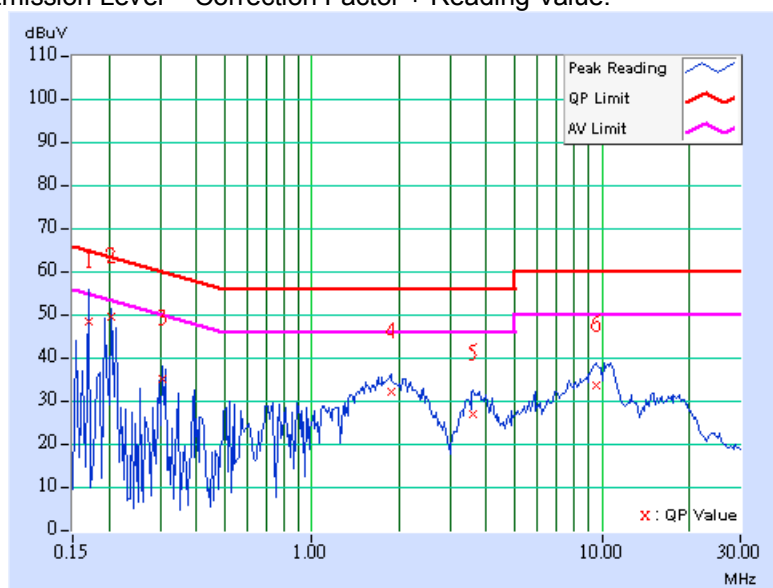

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.10	44.08	-	44.18	-	62.52	52.52	-18.34	-
2	0.291	0.11	32.29	-	32.40	-	60.51	50.51	-28.11	-
3	0.623	0.16	30.13	-	30.29	-	56.00	46.00	-25.71	-
4	1.848	0.25	27.74	-	27.99	-	56.00	46.00	-28.01	-
5	4.004	0.30	24.01	-	24.31	-	56.00	46.00	-31.69	-
6	10.348	0.49	33.71	-	34.20	-	60.00	50.00	-25.80	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

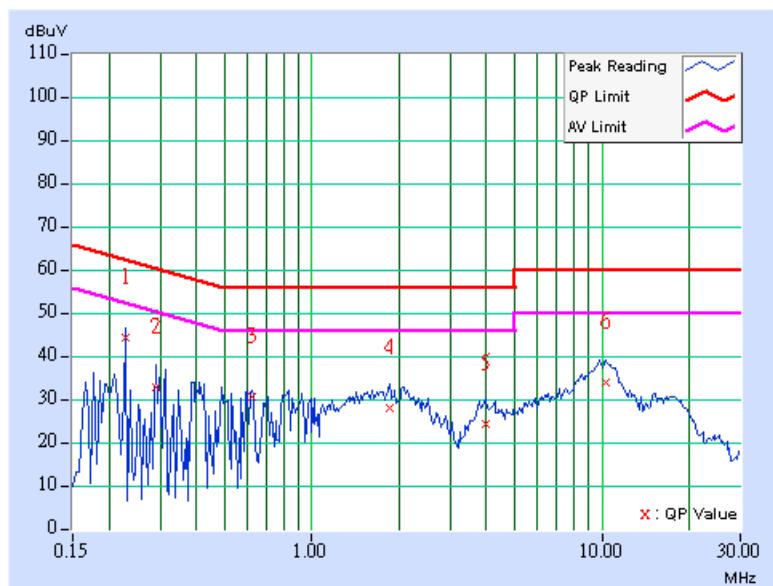

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.10	48.51	-	48.61	-	63.74	53.74	-15.13	-
2	0.392	0.11	30.56	-	30.67	-	58.02	48.02	-27.34	-
3	0.713	0.18	27.03	-	27.21	-	56.00	46.00	-28.79	-
4	1.746	0.26	31.46	-	31.72	-	56.00	46.00	-24.28	-
5	3.777	0.31	26.66	-	26.97	-	56.00	46.00	-29.03	-
6	10.285	0.54	34.23	-	34.77	-	60.00	50.00	-25.23	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

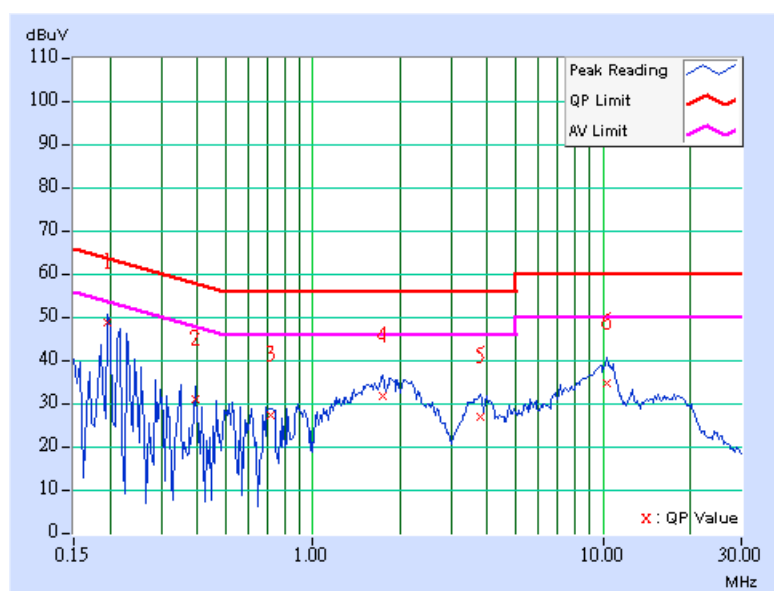

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	WMIA-165G	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.10	45.87	-	45.97	-	63.91	53.91	-17.94	-
2	0.408	0.12	30.01	-	30.13	-	57.69	47.69	-27.57	-
3	0.810	0.20	29.10	-	29.30	-	56.00	46.00	-26.70	-
4	1.887	0.25	28.76	-	29.01	-	56.00	46.00	-26.99	-
5	7.094	0.42	26.04	-	26.46	-	60.00	50.00	-33.54	-
6	10.082	0.49	34.00	-	34.49	-	60.00	50.00	-25.51	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

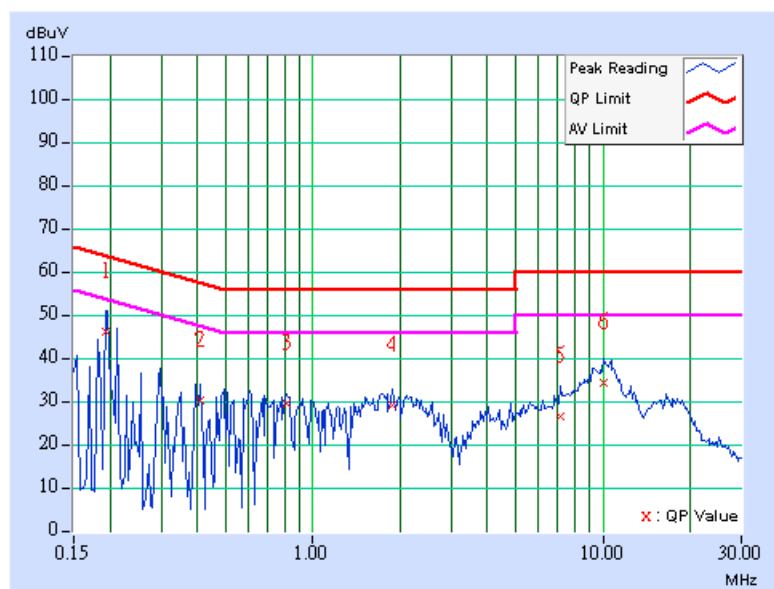

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	WMIA-165G	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	45.32	-	45.42	-	64.98	54.98	-19.56	-
2	0.201	0.10	47.46	-	47.56	-	63.58	53.58	-16.02	-
3	0.732	0.19	26.29	-	26.48	-	56.00	46.00	-29.52	-
4	1.938	0.26	31.02	-	31.28	-	56.00	46.00	-24.72	-
5	3.746	0.31	26.86	-	27.17	-	56.00	46.00	-28.83	-
6	10.234	0.54	34.16	-	34.70	-	60.00	50.00	-25.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

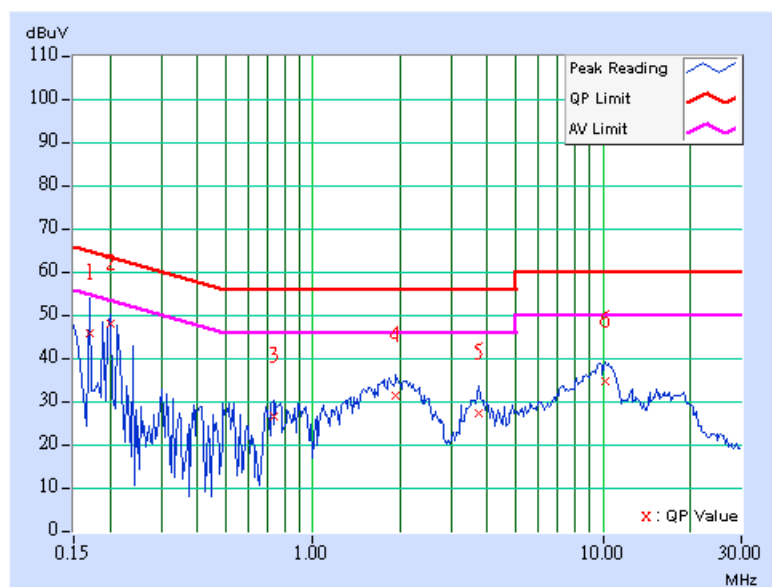

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Leo Hung	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.10	47.36	-	47.46	-	63.42	53.42	-15.96	-
2	0.306	0.11	34.16	-	34.27	-	60.07	50.07	-25.80	-
3	0.693	0.17	28.65	-	28.82	-	56.00	46.00	-27.18	-
4	1.953	0.25	28.81	-	29.06	-	56.00	46.00	-26.94	-
5	5.770	0.37	24.08	-	24.45	-	60.00	50.00	-35.55	-
6	10.797	0.50	33.31	-	33.81	-	60.00	50.00	-26.19	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

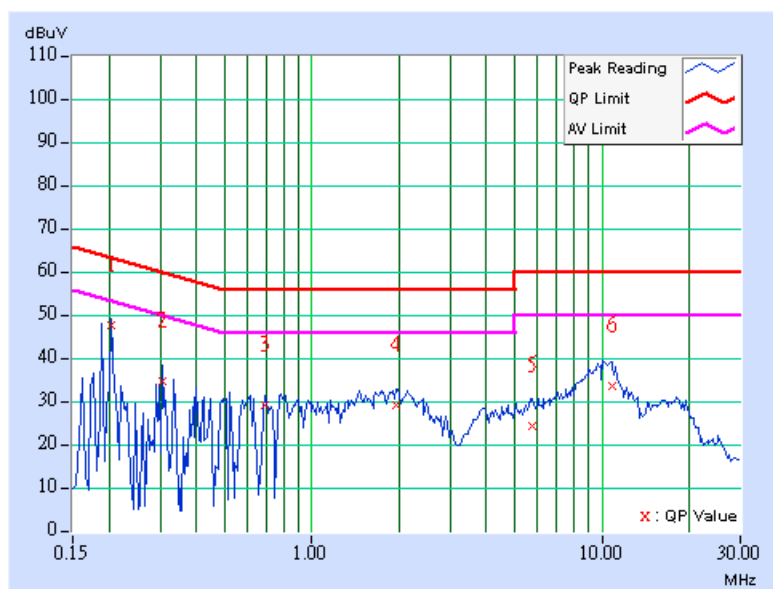

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.332	0.11	50.31	45.30	50.42	45.41	59.39	49.39	-8.97	-3.98
2	0.416	0.11	48.00	37.17	48.11	37.28	57.52	47.52	-9.40	-10.23
3	0.637	0.16	47.08	29.23	47.24	29.39	56.00	46.00	-8.76	-16.61
4	1.349	0.25	44.20	-	44.45	-	56.00	46.00	-11.55	-
5	2.556	0.30	38.60	-	38.90	-	56.00	46.00	-17.10	-
6	10.082	0.54	41.56	-	42.10	-	60.00	50.00	-17.90	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

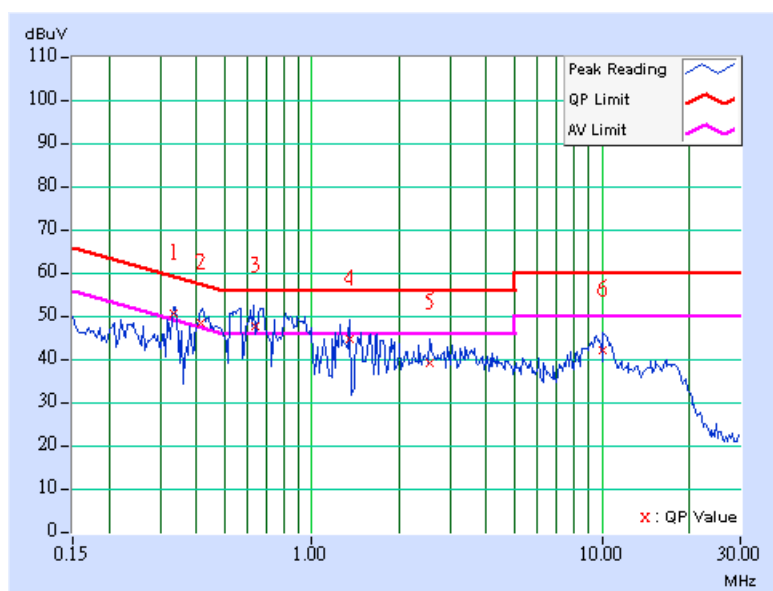

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.329	0.11	48.40	-	48.51	-	59.47	49.47	-10.96	-
2	0.430	0.12	44.79	-	44.91	-	57.25	47.25	-12.35	-
3	0.670	0.17	49.33	43.37	49.50	43.54	56.00	46.00	-6.50	-2.46
4	1.662	0.25	44.20	-	44.45	-	56.00	46.00	-11.55	-
5	3.315	0.35	37.66	-	38.01	-	56.00	46.00	-17.99	-
6	10.159	0.44	41.14	-	41.58	-	60.00	50.00	-18.42	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

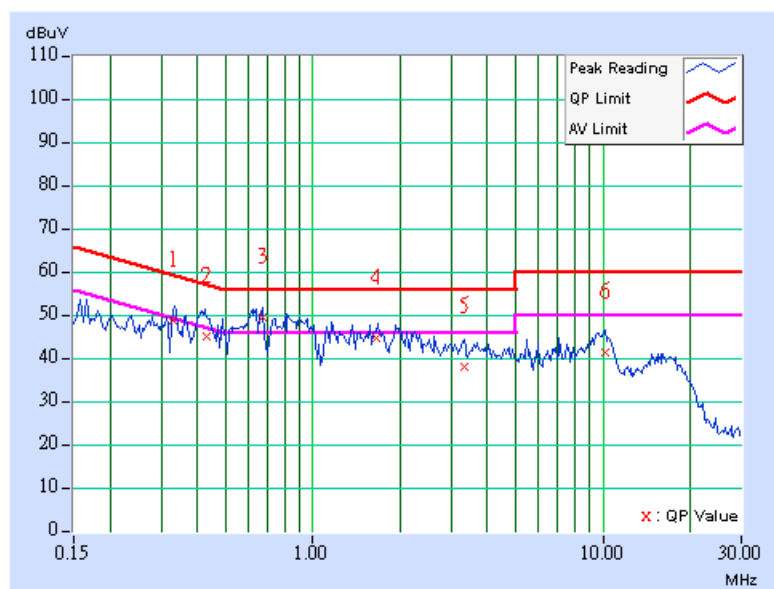

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.334	0.11	50.19	47.15	50.30	47.26	59.36	49.36	-9.06	-2.10
2	0.434	0.12	46.58	-	46.70	-	57.18	47.18	-10.48	-
3	0.664	0.17	49.11	43.72	49.28	43.89	56.00	46.00	-6.72	-2.11
4	1.196	0.24	42.30	-	42.54	-	56.00	46.00	-13.46	-
5	3.234	0.34	38.49	-	38.83	-	56.00	46.00	-17.17	-
6	9.859	0.54	40.82	-	41.36	-	60.00	50.00	-18.64	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

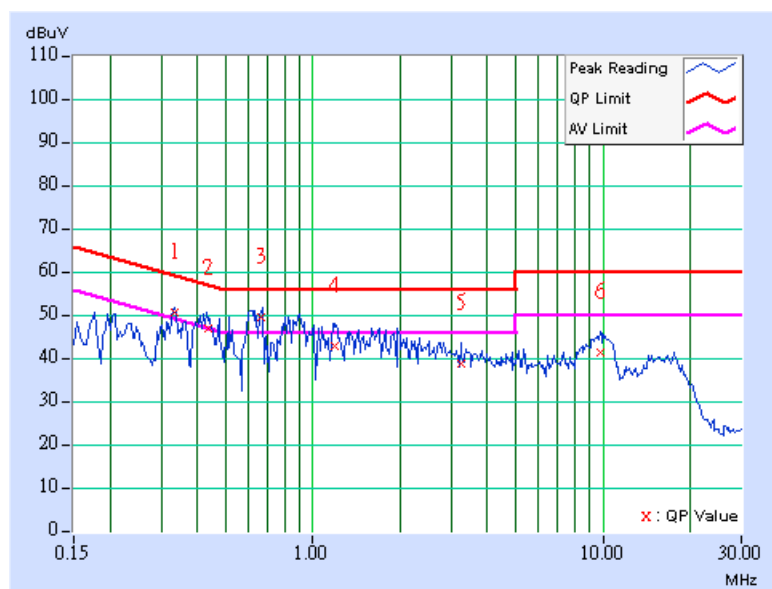

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	WMIA-165G	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.328	0.11	48.19	-	48.30	-	59.50	49.50	-11.20	-
2	0.427	0.12	42.91	-	43.03	-	57.30	47.30	-14.28	-
3	0.663	0.17	49.80	44.57	49.97	44.74	56.00	46.00	-6.03	-1.26
4	1.339	0.25	44.30	-	44.55	-	56.00	46.00	-11.45	-
5	5.152	0.40	35.82	-	36.22	-	60.00	50.00	-23.78	-
6	9.835	0.44	41.36	-	41.80	-	60.00	50.00	-18.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

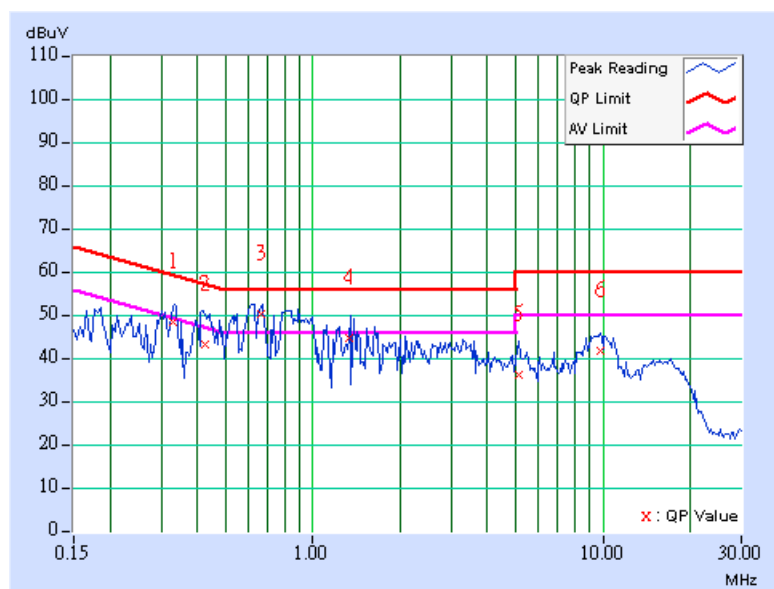

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	WMIA-165G	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.335	0.11	50.00	46.17	50.11	46.28	59.32	49.32	-9.21	-3.04
2	0.424	0.12	44.29	-	44.41	-	57.36	47.36	-12.96	-
3	0.670	0.17	49.53	44.13	49.70	44.30	56.00	46.00	-6.30	-1.70
4	1.344	0.25	44.38	-	44.63	-	56.00	46.00	-11.37	-
5	4.605	0.41	36.30	-	36.71	-	56.00	46.00	-19.29	-
6	10.068	0.54	41.01	-	41.55	-	60.00	50.00	-18.45	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

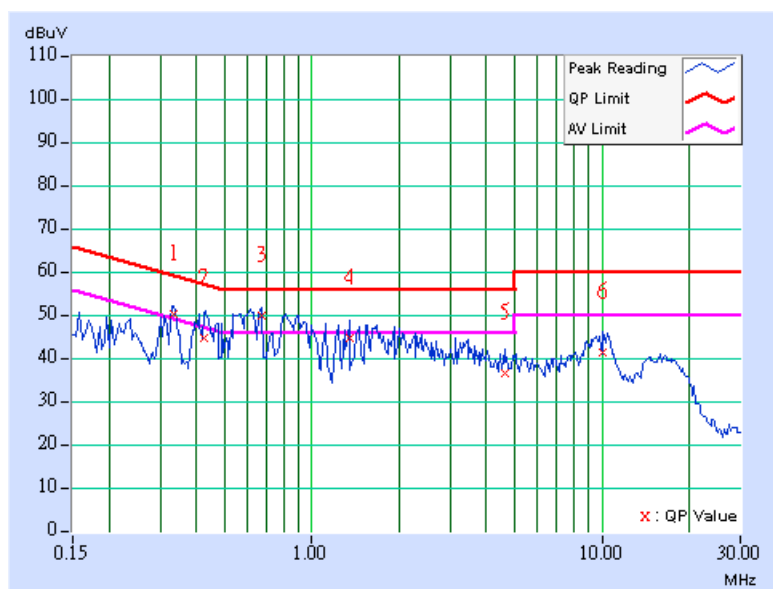

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.333	0.11	50.79	46.83	50.90	46.94	59.37	49.37	-8.47	-2.43
2	0.434	0.12	47.17	44.50	47.29	44.62	57.18	47.18	-9.89	-2.56
3	0.662	0.17	49.27	42.19	49.44	42.36	56.00	46.00	-6.56	-3.64
4	1.302	0.25	41.95	-	42.20	-	56.00	46.00	-13.80	-
5	6.516	0.41	34.99	-	35.40	-	60.00	50.00	-24.60	-
6	10.217	0.44	41.18	-	41.62	-	60.00	50.00	-18.38	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

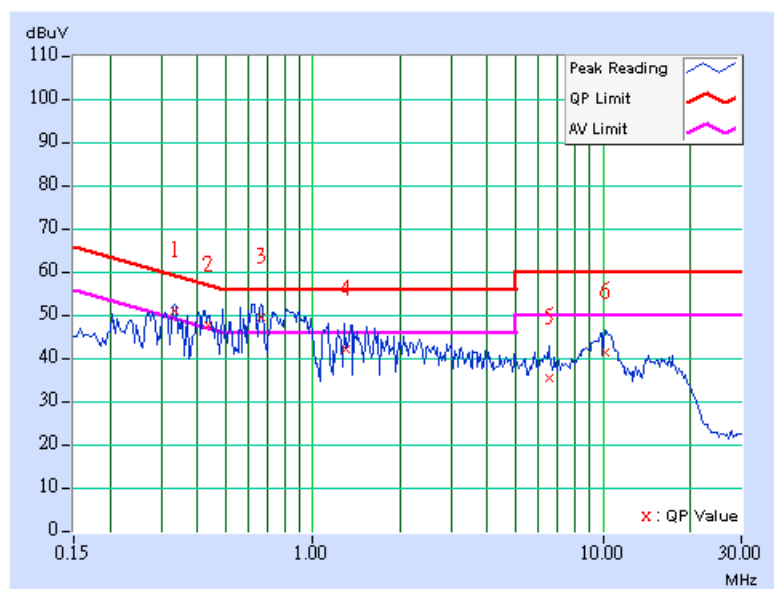

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Nov. 09, 2005
Preamplifier Agilent	8447D	2944A10629	Nov. 09, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

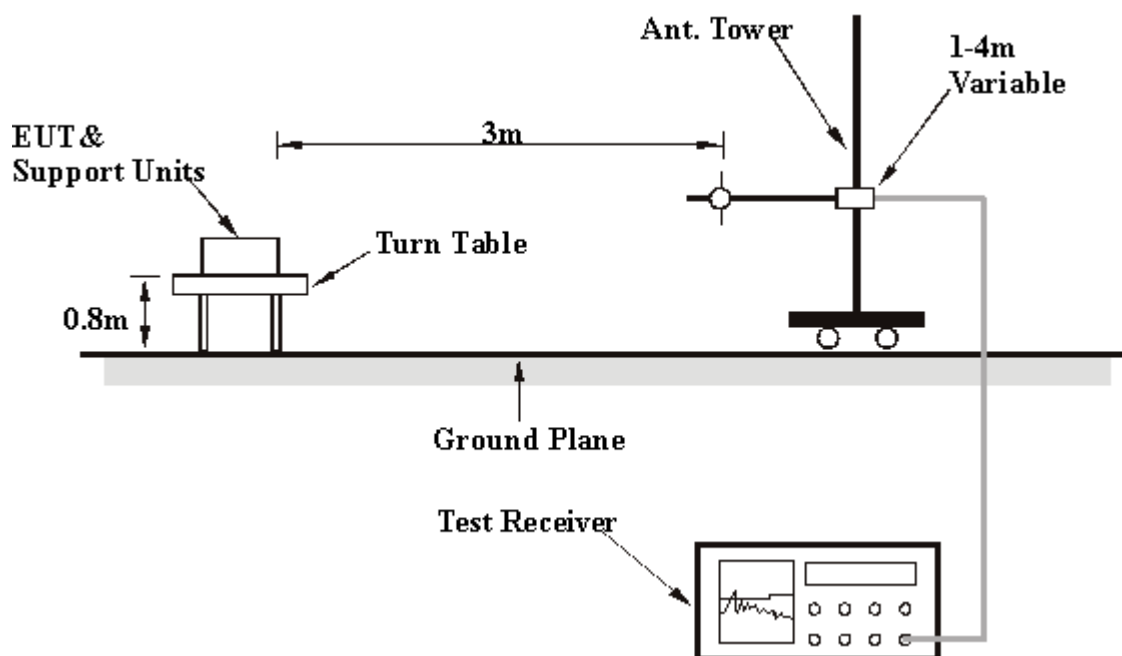

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	350.74	29.06 QP	46.00	-16.94	1.00 H	259	13.52	15.54
2	479.04	27.52 QP	46.00	-18.48	2.00 H	79	9.19	18.33
3	585.95	28.12 QP	46.00	-17.88	3.00 H	235	7.68	20.45
4	702.59	32.33 QP	46.00	-13.67	1.00 H	277	10.26	22.07
5	764.79	27.58 QP	46.00	-18.42	1.00 H	223	4.27	23.31
6	799.78	28.68 QP	46.00	-17.32	1.00 H	133	5.22	23.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	27.35 QP	40.00	-12.65	1.25 V	358	12.68	14.67
2	131.08	27.85 QP	43.50	-15.65	1.00 V	19	14.11	13.74
3	300.20	22.32 QP	46.00	-23.68	1.50 V	289	7.91	14.41
4	533.47	32.96 QP	46.00	-13.04	1.00 V	352	13.80	19.17
5	599.56	34.13 QP	46.00	-11.87	1.00 V	139	13.31	20.82
6	702.59	32.46 QP	46.00	-13.54	1.25 V	181	10.39	22.07

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.59	36.58 QP	43.50	-6.92	1.50 H	49	24.34	12.23
2	148.58	27.59 QP	43.50	-15.91	1.75 H	223	12.94	14.65
3	300.20	31.41 QP	46.00	-14.59	1.00 H	259	16.99	14.41
4	356.57	35.23 QP	46.00	-10.77	1.00 H	145	19.55	15.68
5	389.62	35.26 QP	46.00	-10.74	1.00 H	139	18.78	16.48
6	720.08	30.83 QP	46.00	-15.17	1.00 H	16	8.32	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.82	27.77 QP	40.00	-12.23	1.00 V	301	15.50	12.27
2	113.59	32.78 QP	43.50	-10.72	1.00 V	22	20.54	12.23
3	300.20	33.99 QP	46.00	-12.01	1.75 V	148	19.58	14.41
4	438.22	38.79 QP	46.00	-7.21	2.00 V	256	21.09	17.70
5	599.56	31.67 QP	46.00	-14.33	1.25 V	253	10.85	20.82
6	665.65	34.12 QP	46.00	-11.88	1.00 V	241	12.48	21.64

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.26 PK	74.00	-28.74	1.21 H	116	18.73	26.53
1	1053.00	42.33 AV	54.00	-11.67	1.21 H	116	15.80	26.53
2	2390.00	46.09 PK	74.00	-27.91	1.28 H	123	14.29	31.80
2	2390.00	38.64 AV	54.00	-15.36	1.28 H	123	6.84	31.80
3	*2412.00	105.11 PK			1.28 H	123	73.24	31.87
3	*2412.00	97.66 AV			1.28 H	123	65.79	31.87
4	2786.00	53.01 PK	74.00	-20.99	1.08 H	121	19.70	33.31
4	2786.00	52.66 AV	54.00	-1.34	1.08 H	121	19.35	33.31
5	4824.00	49.15 PK	74.00	-24.85	1.24 H	199	11.04	38.11
5	4824.00	36.59 AV	54.00	-17.41	1.24 H	199	-1.52	38.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.40 PK	74.00	-28.60	1.00 V	138	18.87	26.53
1	1053.00	42.39 AV	54.00	-11.61	1.00 V	138	15.86	26.53
2	*2412.00	104.07 PK			1.09 V	15	72.20	31.87
2	*2412.00	96.38 AV			1.09 V	15	64.51	31.87
3	2786.00	49.94 PK	74.00	-24.06	1.25 V	253	16.63	33.31
3	2786.00	45.88 AV	54.00	-8.12	1.25 V	253	12.57	33.31
4	4824.00	49.78 PK	74.00	-24.22	1.13 V	143	11.67	38.11
4	4824.00	38.07 AV	54.00	-15.93	1.13 V	143	-0.04	38.11

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)WMIA-165G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.68 PK	74.00	-28.32	1.17 H	57	19.15	26.53
1	1053.00	42.47 AV	54.00	-11.53	1.17 H	57	15.94	26.53
2	*2437.00	105.82 PK			1.29 H	121	73.87	31.95
2	*2437.00	78.13 AV			1.29 H	121	66.18	31.95
3	2811.00	51.87 PK	74.00	-22.13	1.07 H	123	18.46	33.41
3	2811.00	49.06 AV	54.00	-4.94	1.07 H	123	15.65	33.41
4	4874.00	49.67 PK	74.00	-24.33	1.19 H	287	11.39	38.28
4	4874.00	37.49 AV	54.00	-16.51	1.19 H	287	-0.79	38.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	46.08 PK	74.00	-27.92	1.00 V	138	19.55	26.53
1	1053.00	42.88 AV	54.00	-11.12	1.00 V	138	16.35	26.53
2	*2437.00	103.92 PK			1.00 V	310	71.97	31.95
2	*2437.00	96.23 AV			1.00 V	310	64.28	31.95
3	2811.00	50.16 PK	74.00	-23.84	1.00 V	340	16.75	33.41
3	2811.00	47.24 AV	54.00	-6.76	1.00 V	340	13.83	33.41
4	4874.00	51.45 PK	74.00	-22.55	1.00 V	264	13.17	38.28
4	4874.00	38.43 AV	54.00	-15.57	1.00 V	264	0.15	38.28

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.38 PK	74.00	-28.62	1.20 H	115	18.85	26.53
1	1053.00	42.13 AV	54.00	-11.87	1.20 H	115	15.60	26.53
2	*2462.00	105.78 PK			1.08 H	303	73.76	32.02
2	*2462.00	98.34 AV			1.08 H	303	66.32	32.02
3	2483.50	43.38 PK	74.00	-30.62	1.08 H	303	11.29	32.09
3	2483.50	35.94 AV	54.00	-18.06	1.08 H	303	3.85	32.09
4	2836.00	49.48 PK	74.00	-24.52	1.06 H	119	15.98	33.50
4	2836.00	45.97 AV	54.00	-8.03	1.06 H	119	12.47	33.50
5	4924.00	50.43 PK	74.00	-23.57	1.02 H	147	11.94	38.49
5	4924.00	37.58 AV	54.00	-16.42	1.02 H	147	-0.91	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	46.37 PK	74.00	-27.63	1.00 V	135	19.84	26.53
1	1053.00	43.02 AV	54.00	-10.98	1.00 V	135	16.49	26.53
2	*2462.00	104.57 PK			1.08 V	14	72.55	32.02
2	*2462.00	97.07 AV			1.08 V	14	65.05	32.02
3	2483.50	42.17 PK	74.00	-31.83	1.08 V	14	10.08	32.09
3	2483.50	34.67 AV	54.00	-19.33	1.08 V	14	2.58	32.09
4	2836.00	48.82 PK	74.00	-25.18	1.00 V	341	15.32	33.50
4	2836.00	44.89 AV	54.00	-9.11	1.00 V	341	11.39	33.50
5	4924.00	50.49 PK	74.00	-23.51	1.02 V	133	12.00	38.49
5	4924.00	38.36 AV	54.00	-15.64	1.02 V	133	-0.13	38.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM MODULATION

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	WMIA-165G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.86 PK	74.00	-24.14	1.30 H	121	18.06	31.80
1	2390.00	41.05 AV	54.00	-12.95	1.30 H	121	9.25	31.80
2	*2412.00	102.01 PK			1.30 H	121	70.14	31.87
2	*2412.00	93.20 AV			1.30 H	121	61.33	31.87
3	2786.00	55.91 PK	74.00	-18.09	1.08 H	122	22.60	33.31
3	2786.00	52.96 AV	54.00	-1.04	1.08 H	122	19.65	33.31
4	4824.00	49.31 PK	74.00	-24.69	1.05 H	323	11.20	38.11
4	4824.00	37.10 AV	54.00	-16.90	1.05 H	323	-1.01	38.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	46.92 PK	74.00	-27.08	1.04 V	161	20.39	26.53
1	1053.00	43.74 AV	54.00	-10.26	1.04 V	161	17.21	26.53
2	2390.00	44.39 PK	74.00	-29.61	1.11 V	351	12.59	31.80
2	2390.00	35.69 AV	54.00	-18.31	1.11 V	351	3.89	31.80
3	*2412.00	96.54 PK			1.11 V	351	64.67	31.87
3	*2412.00	87.84 AV			1.11 V	351	55.97	31.87
4	2786.00	52.03 PK	74.00	-21.97	1.07 V	190	18.72	33.31
4	2786.00	48.57 AV	54.00	-5.43	1.07 V	190	15.26	33.31
5	4824.00	49.47 PK	74.00	-24.53	1.00 V	80	11.36	38.11
5	4824.00	36.83 AV	54.00	-17.17	1.00 V	80	-1.28	38.11

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	46.26 PK	74.00	-27.74	1.23 H	116	19.73	26.53
1	1053.00	42.88 AV	54.00	-11.12	1.23 H	116	16.35	26.53
2	*2437.00	103.64 PK			1.28 H	115	71.69	31.95
2	*2437.00	94.63 AV			1.28 H	115	62.68	31.95
3	2811.00	55.04 PK	74.00	-18.96	1.07 H	120	21.63	33.41
3	2811.00	51.94 AV	54.00	-2.06	1.07 H	120	18.53	33.41
4	4874.00	49.82 PK	74.00	-24.18	1.20 H	15	11.54	38.28
4	4874.00	37.03 AV	54.00	-16.97	1.20 H	15	-1.25	38.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	46.13 PK	74.00	-27.87	1.00 V	138	19.60	26.53
1	1053.00	43.02 AV	54.00	-10.98	1.00 V	138	16.49	26.53
2	*2437.00	95.11 PK			1.15 V	251	63.16	31.95
2	*2437.00	86.32 AV			1.15 V	251	54.37	31.95
3	2811.00	52.51 PK	74.00	-21.49	1.00 V	341	19.10	33.41
3	2811.00	49.16 AV	54.00	-4.84	1.00 V	341	15.75	33.41
4	4874.00	49.49 PK	74.00	-24.51	1.08 V	128	11.21	38.28
4	4874.00	36.80 AV	54.00	-17.20	1.08 V	128	-1.48	38.28

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Nintendo Wi-Fi USB Connector	MEASUREMENT DETAIL	
MODEL	NTR-010(USA)	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.73 PK	74.00	-28.27	1.20 H	55	19.20	26.53
1	1053.00	42.16 AV	54.00	-11.84	1.20 H	55	15.63	26.53
2	*2462.00	104.01 PK			1.00 H	125	71.99	32.02
2	*2462.00	94.57 AV			1.00 H	125	62.55	32.02
3	2483.50	49.71 PK	74.00	-24.29	1.00 H	125	17.62	32.09
3	2483.50	40.27 AV	54.00	-13.73	1.00 H	125	8.18	32.09
4	2836.00	50.97 PK	74.00	-23.03	1.07 H	122	17.47	33.50
4	2836.00	47.11 AV	54.00	-6.89	1.07 H	122	13.61	33.50
5	4924.00	49.80 PK	74.00	-24.20	1.10 H	267	11.31	38.49
5	4924.00	37.16 AV	54.00	-16.84	1.10 H	267	-1.33	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1053.00	45.69 PK	74.00	-28.31	1.00 V	137	19.16	26.53
1	1053.00	42.28 AV	54.00	-11.72	1.00 V	137	15.75	26.53
2	*2462.00	97.21 PK			1.00 V	208	65.19	32.02
2	*2462.00	88.84 AV			1.00 V	208	56.82	32.02
3	2483.50	42.91 PK	74.00	-31.09	1.00 V	208	10.82	32.09
3	2483.50	34.54 AV	54.00	-19.46	1.00 V	208	2.45	32.09
4	2836.00	51.43 PK	74.00	-22.57	1.00 V	341	17.93	33.50
4	2836.00	47.01 AV	54.00	-6.99	1.00 V	341	13.51	33.50
5	4924.00	50.00 PK	74.00	-24.00	1.05 V	47	11.51	38.49
5	4924.00	36.74 AV	54.00	-17.26	1.05 V	47	-1.75	38.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.96	0.5	PASS
6	2437	11.72	0.5	PASS
11	2462	11.68	0.5	PASS


CH1

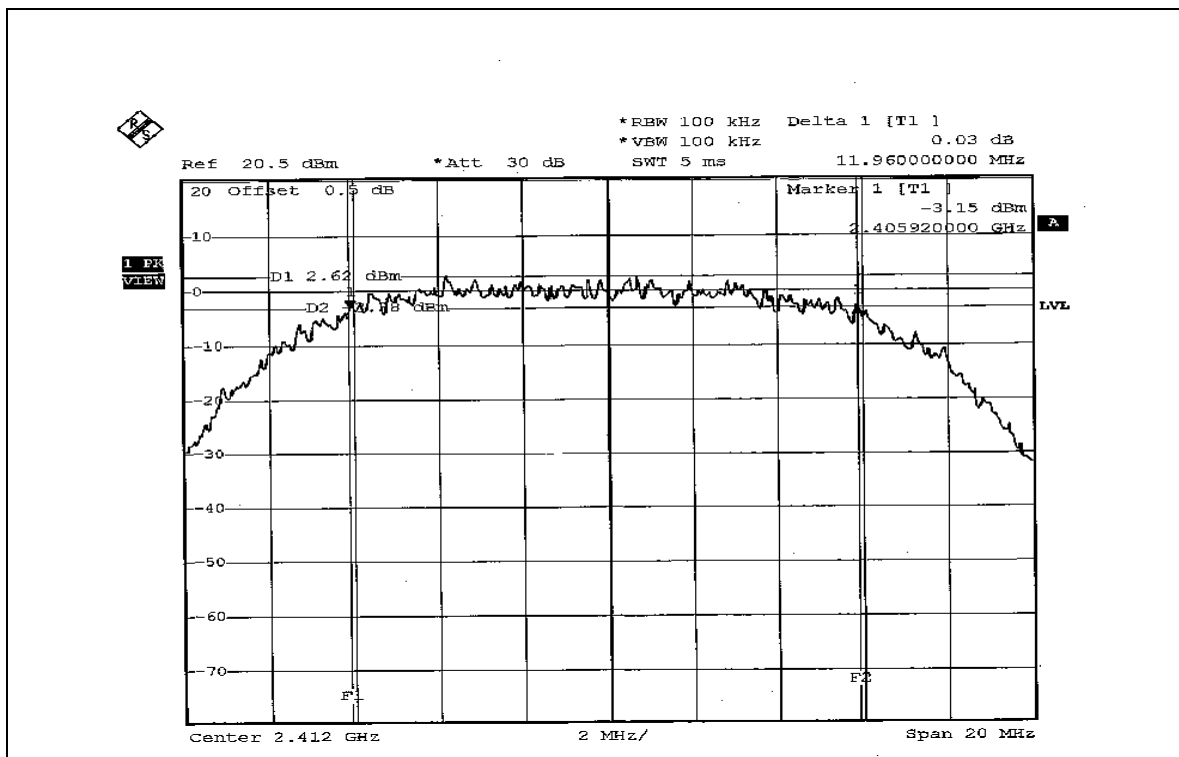

CH6

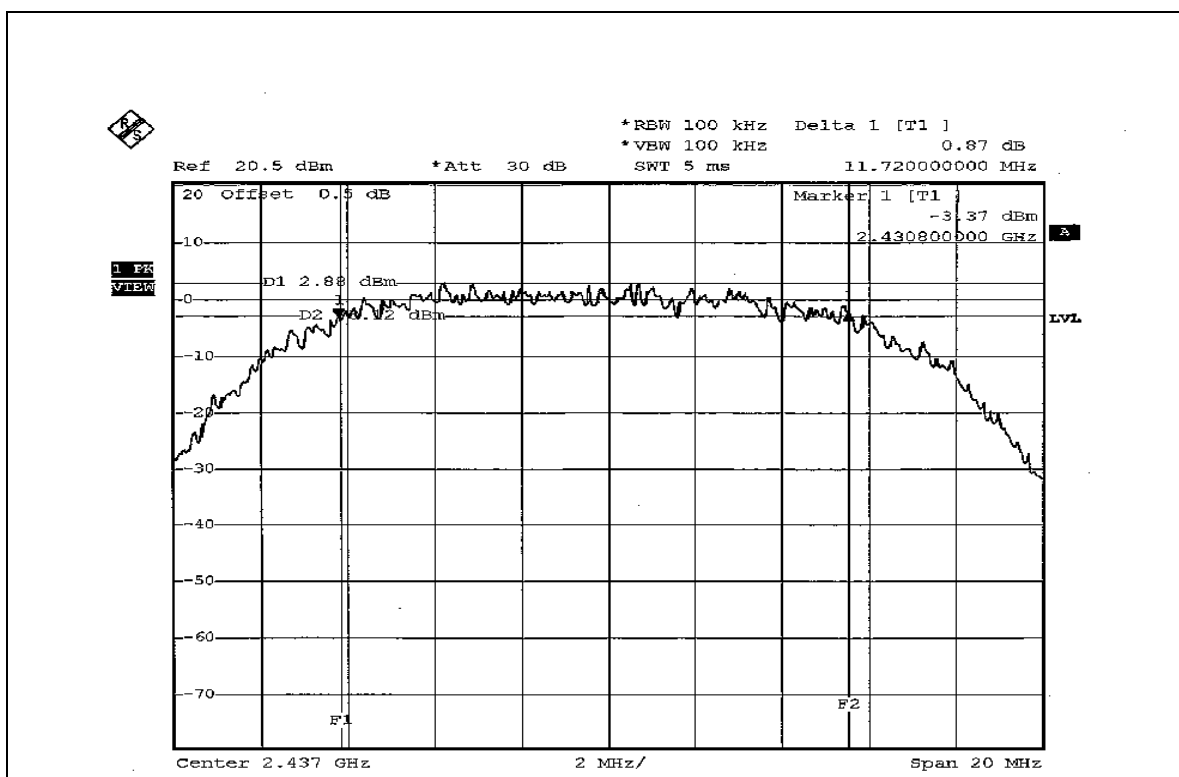

CH11

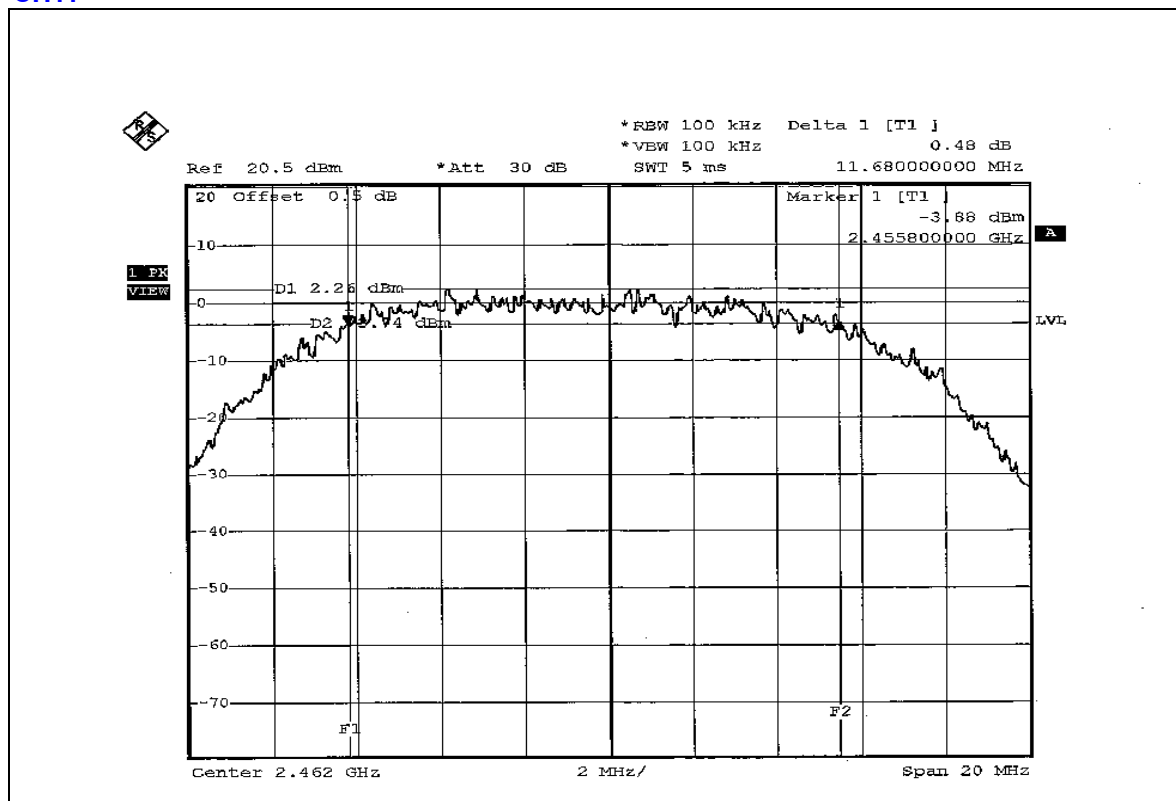


802.11g OFDM MODULATION


EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

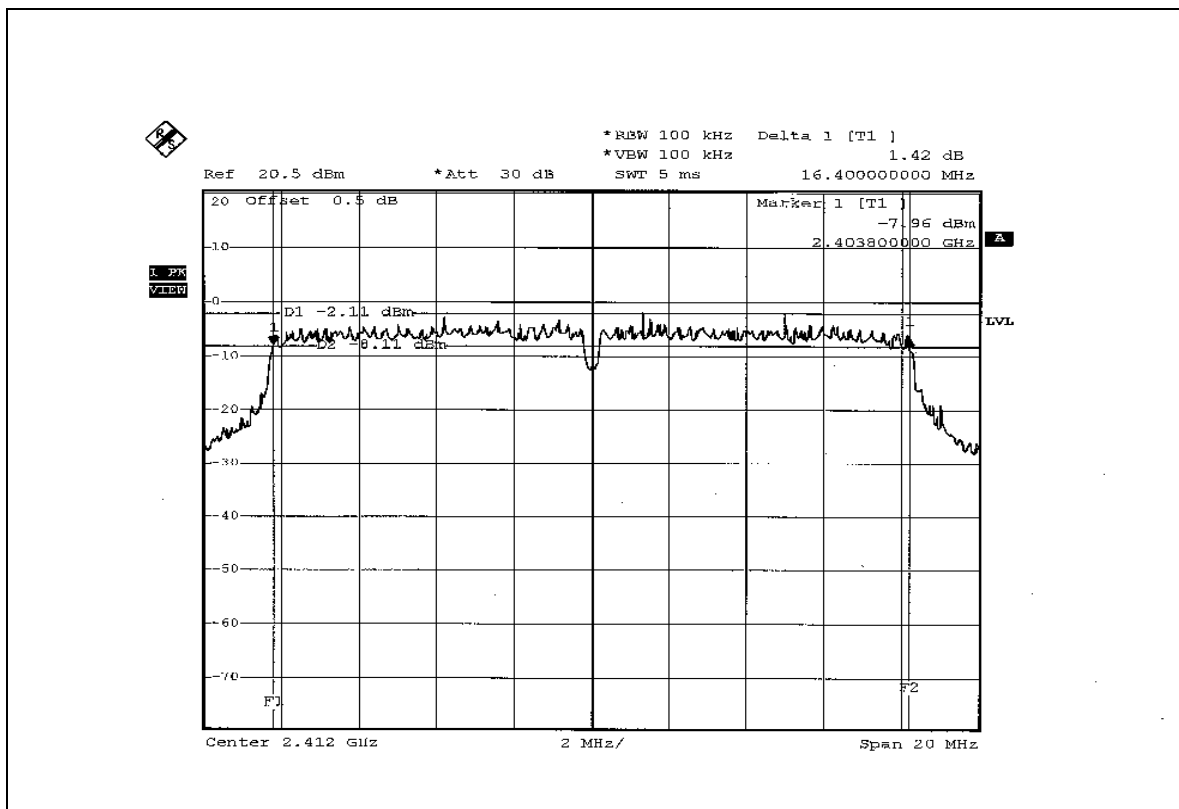

CH6

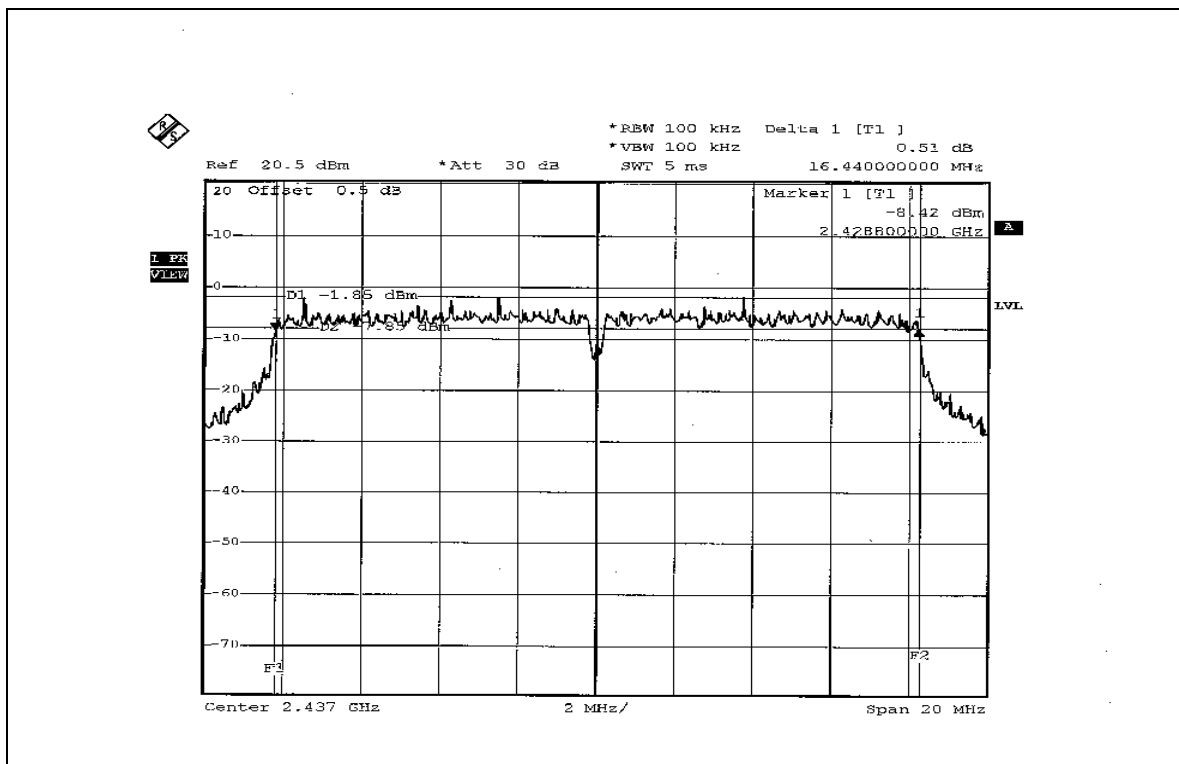

CH11

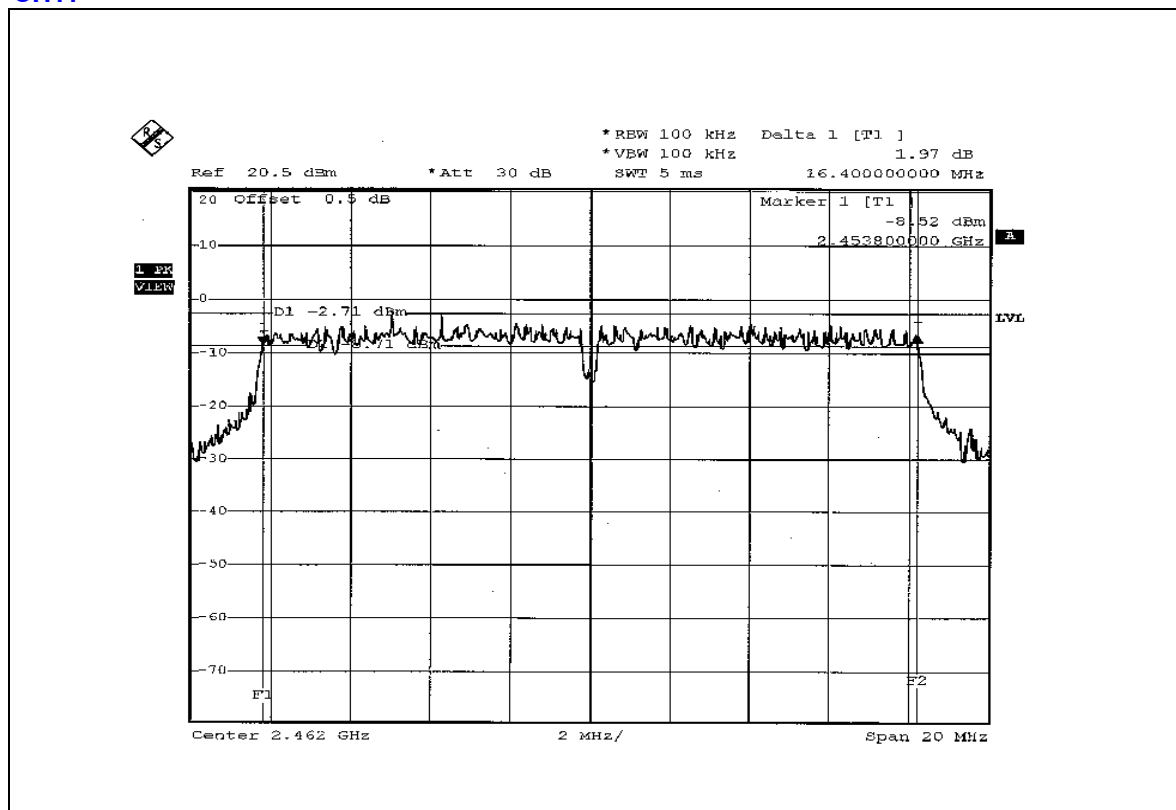

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm. .

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	38.019	15.80	30	PASS
6	2437	38.194	15.82	30	PASS
11	2462	37.411	15.73	30	PASS

802.11g OFDM MODULATION

EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	31.915	15.04	30	PASS
6	2437	31.842	15.03	30	PASS
11	2462	31.915	15.04	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.93	8	PASS
6	2437	-10.80	8	PASS
11	2462	-10.94	8	PASS


CH1

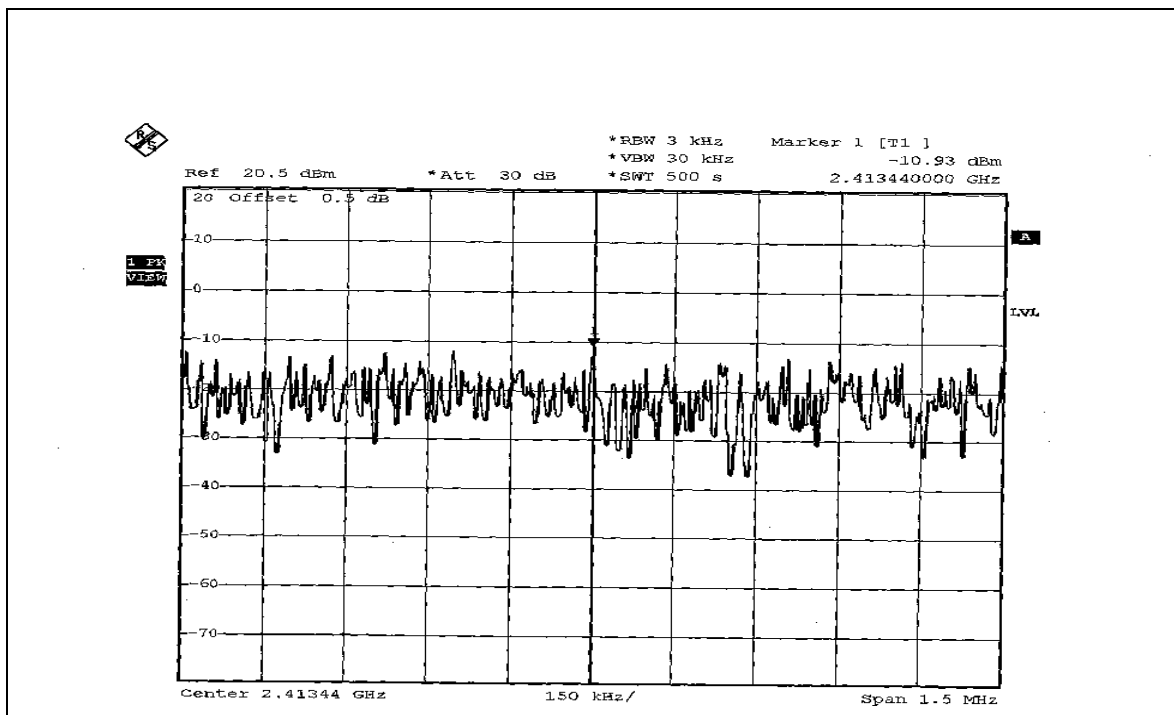

CH6

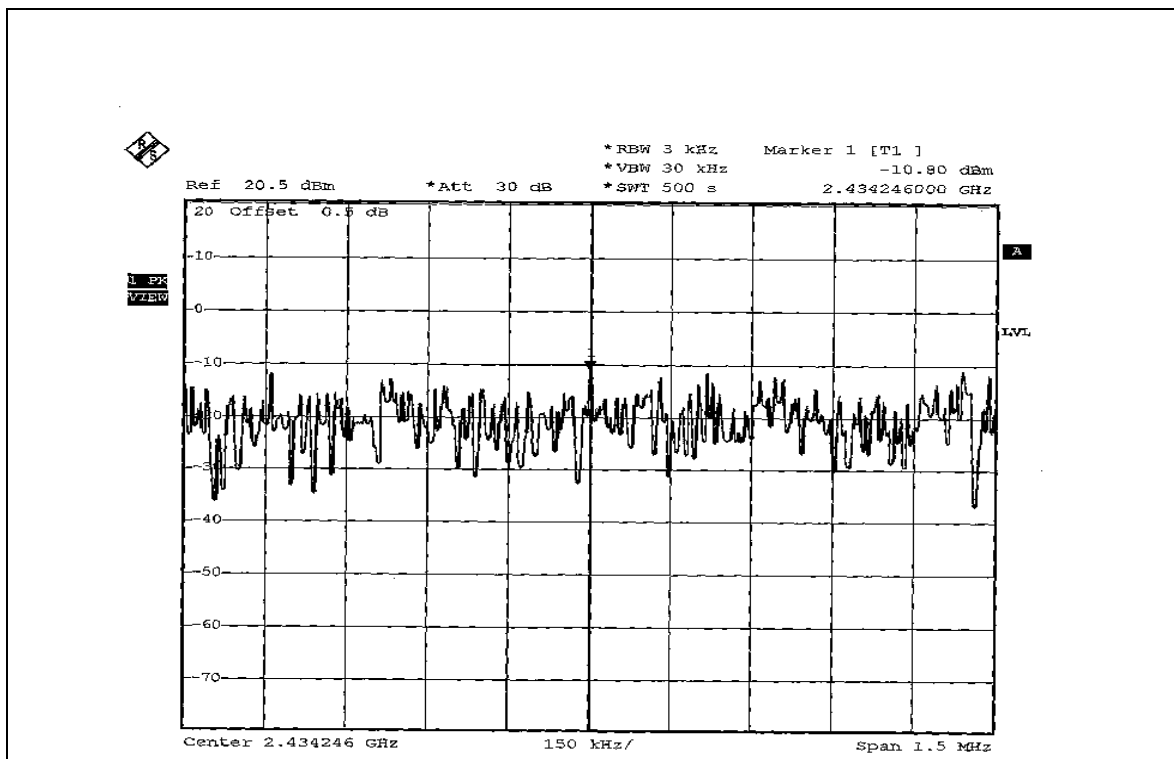

CH11

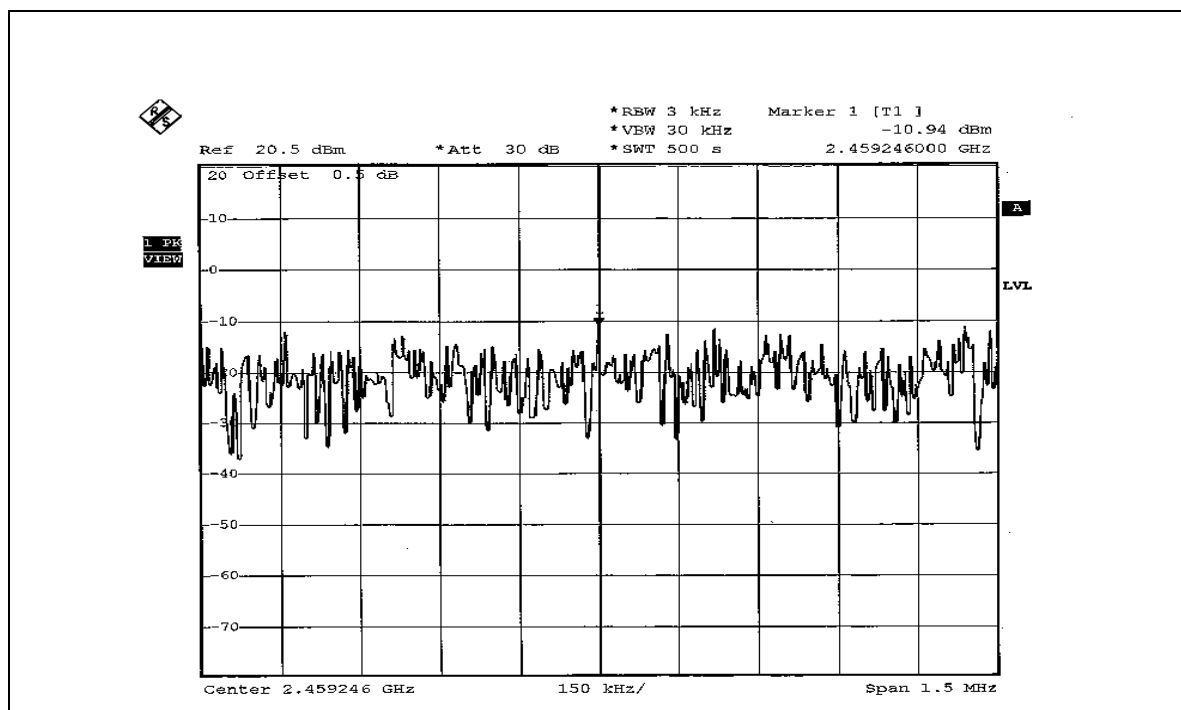


802.11g OFDM MODULATION


EUT	Nintendo Wi-Fi USB Connector	MODEL	NTR-010(USA)
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-17.75	8	PASS
6	2437	-17.25	8	PASS
11	2462	-17.18	8	PASS


CH1

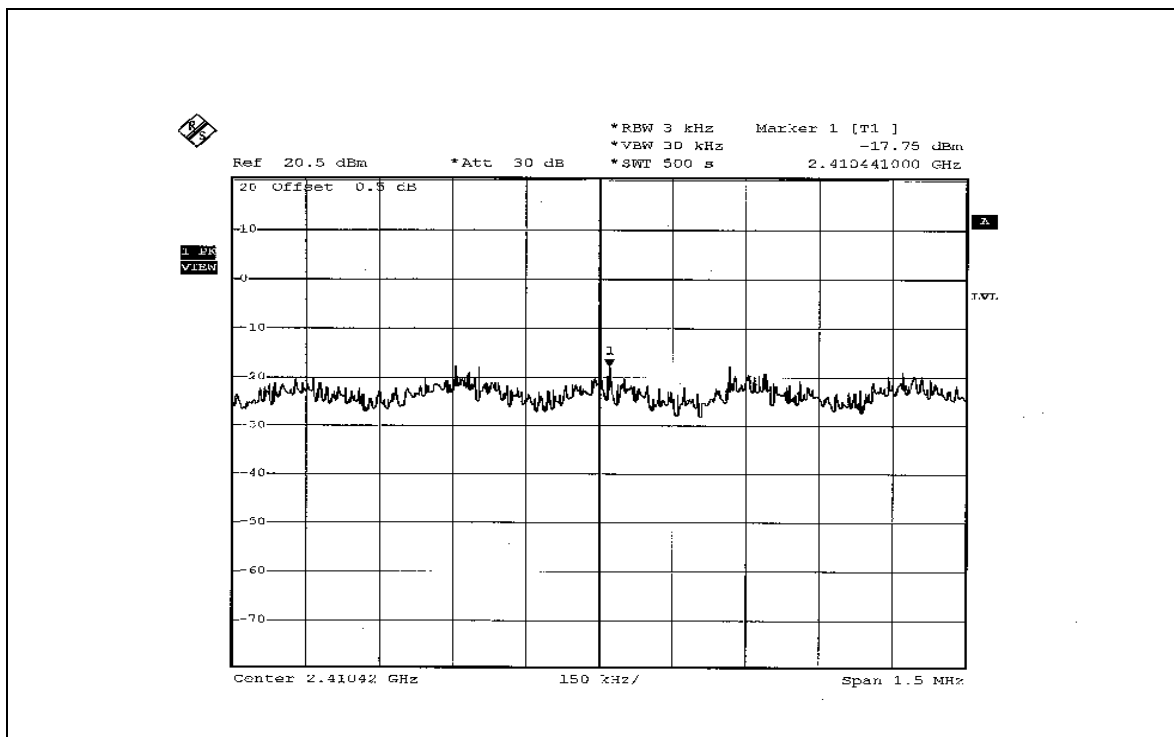

CH6

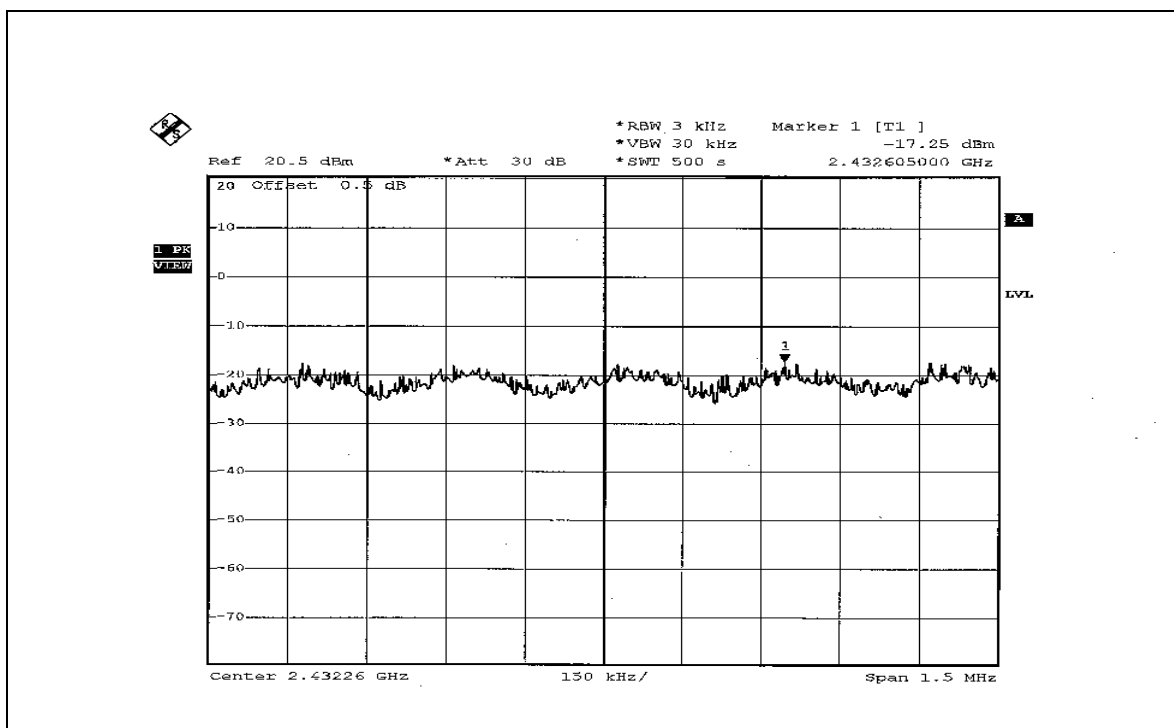

CH11

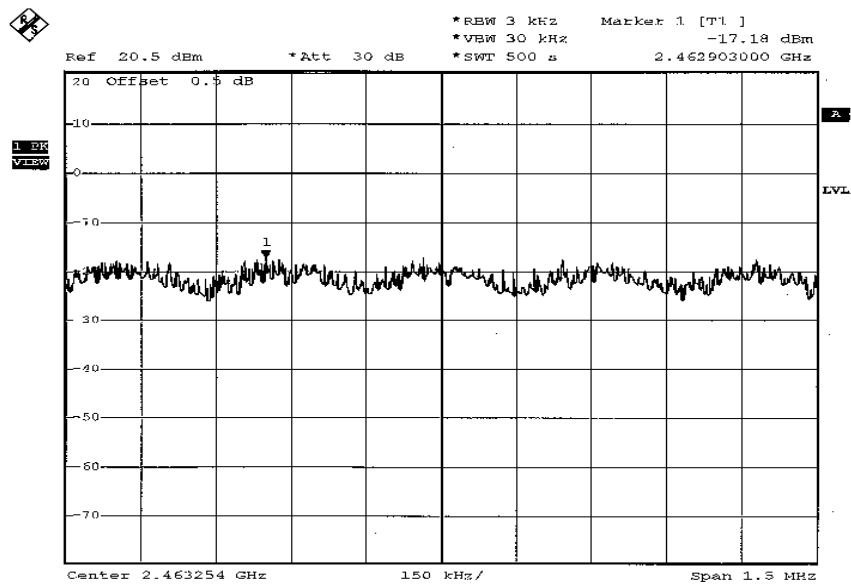

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 8 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

802.11b DSSS MODULATION

NOTE:



The band edge emission plot on page 60 show 49.31dBc delta between carrier maximum power and local maximum emission in restrict band (2.3872GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.11dBuV/m (Peak), so the maximum field strength in restrict band is $105.11 - 49.31 = 55.80$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 60 show 58.76dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.66BuV/m (Average), so the maximum field strength in restrict band is $97.66 - 58.76 = 38.90$ dBuV/m, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 61 show 50.09dBc delta between carrier maximum power and local maximum emission in restrict band (2.4947GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.78dBuV/m (Peak), so the maximum field strength in restrict band is $105.78 - 50.09 = 55.69$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 62 show 61.78dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.34dBuV/m (Average), so the maximum field strength in restrict band is $98.34 - 61.78 = 36.56$ dBuV/m, which is under 54dBuV/m limit.

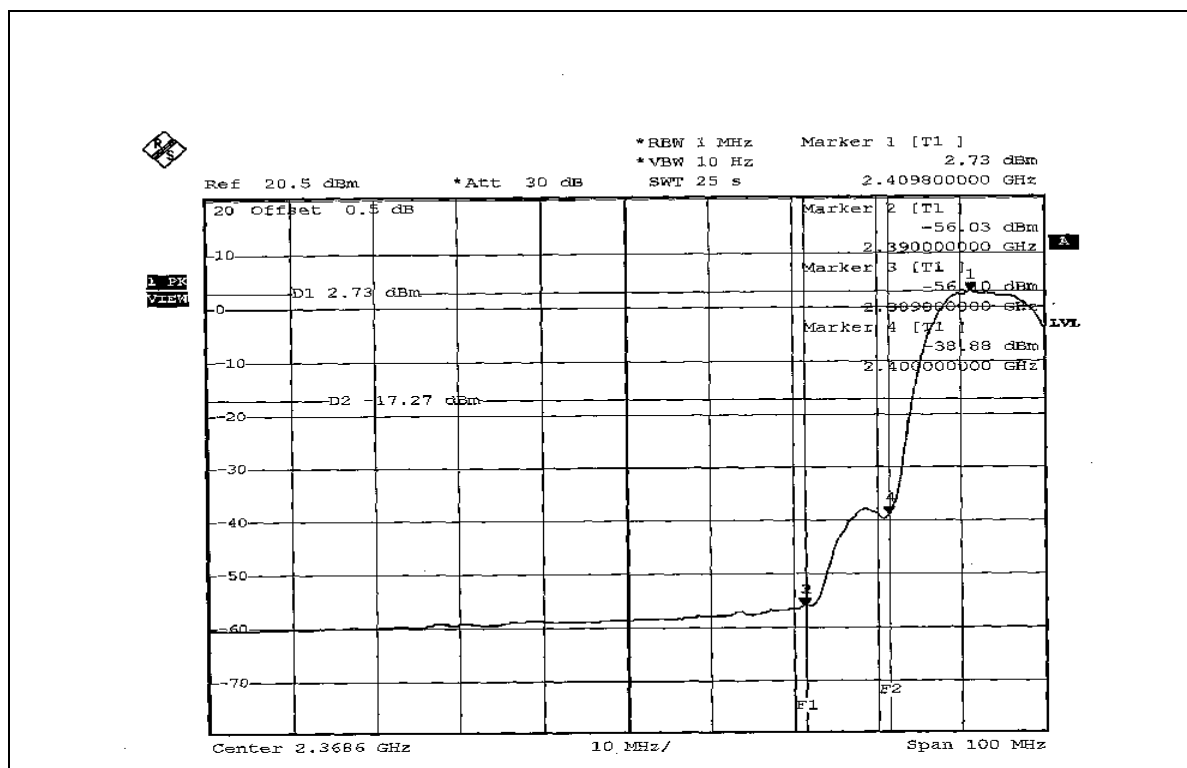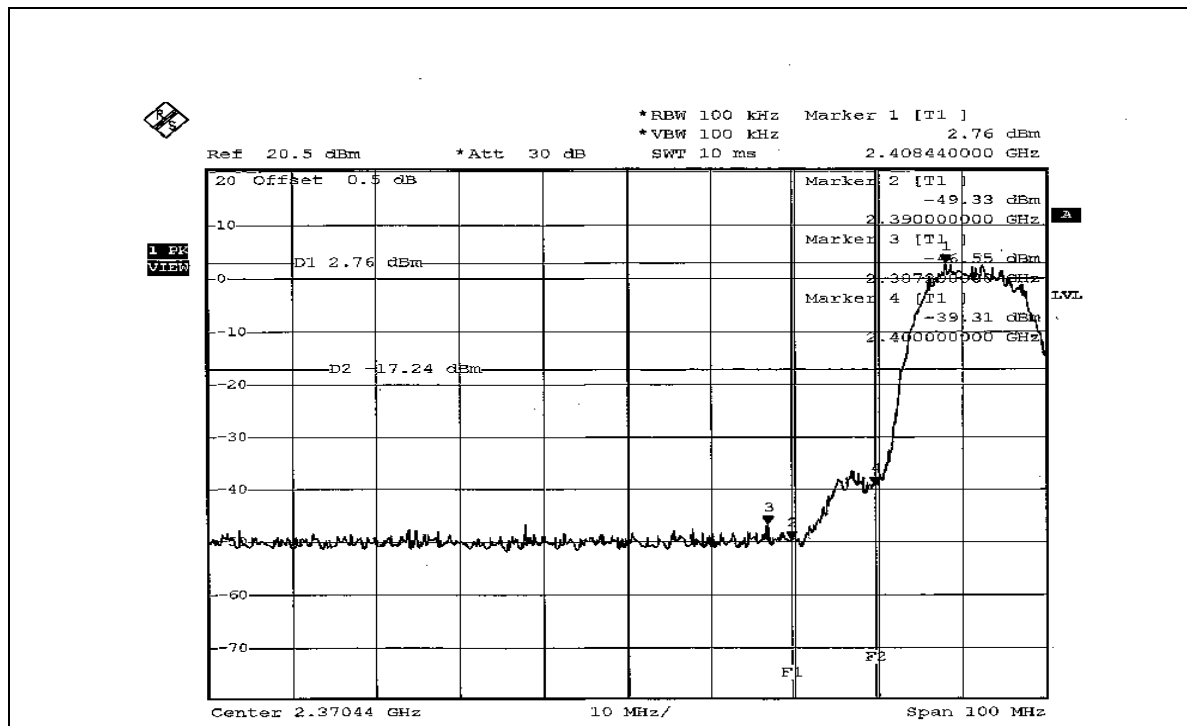

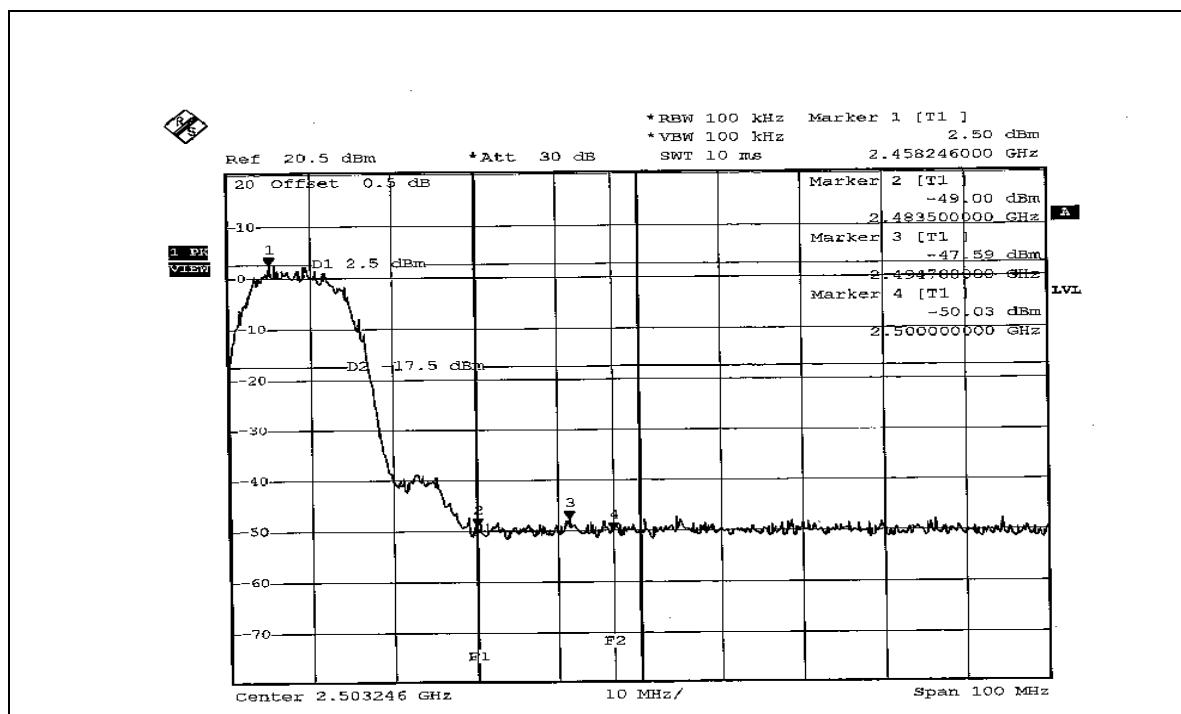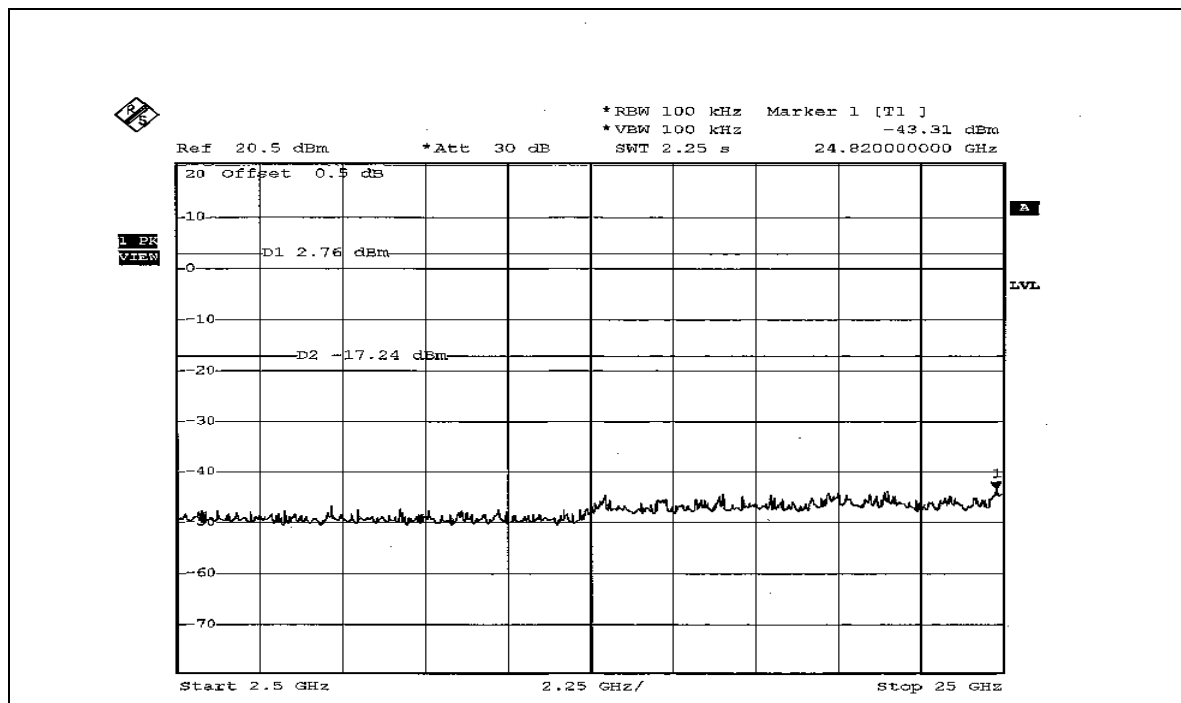

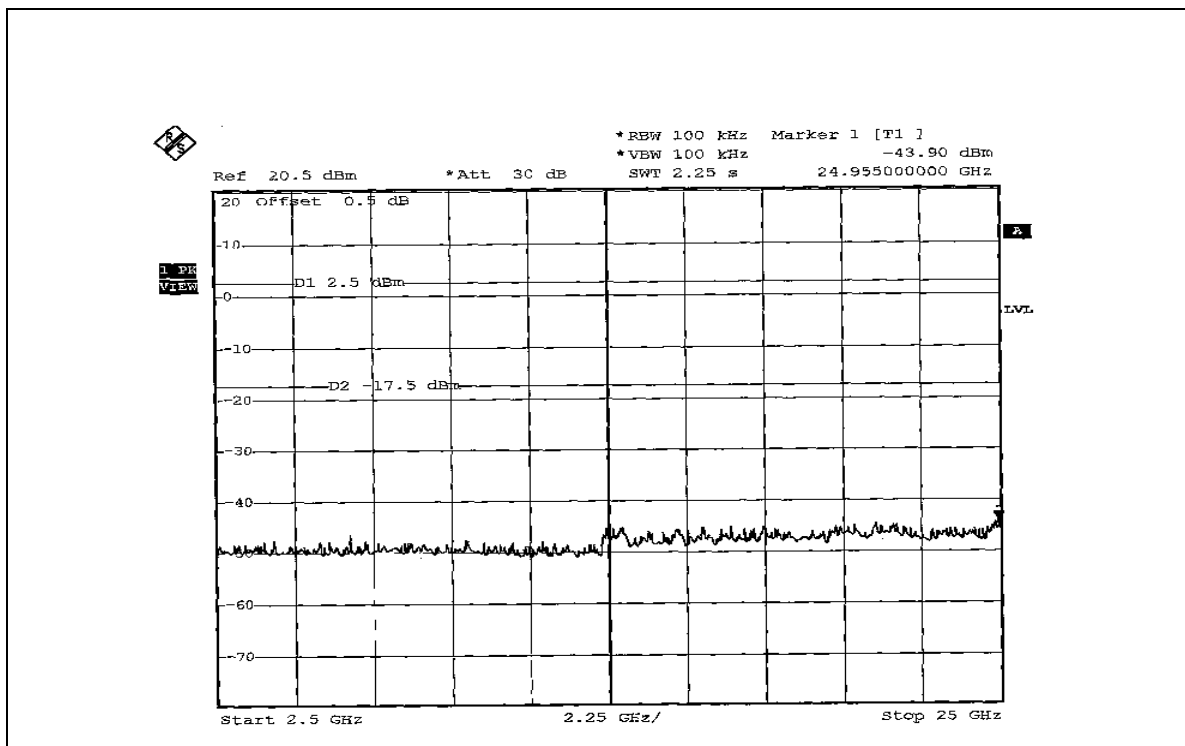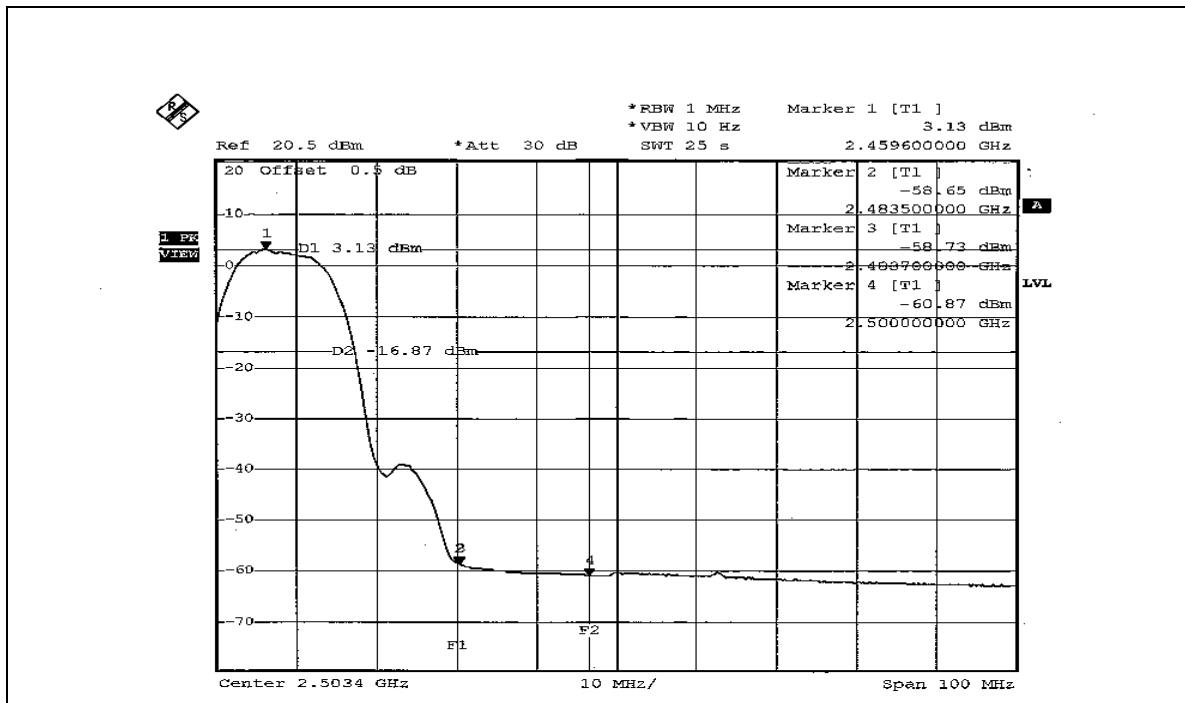

802.11g OFDM MODULATION

NOTE 1:



The band edge emission plot on page 64 show 49.51dBc delta between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.01dBuV/m (Peak), so the maximum field strength in restrict band is $102.01 - 49.51 = 52.50$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 64 show 50.61dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 93.20dBuV/m (Average), so the maximum field strength in restrict band is $93.20 - 50.61 = 42.59$ dBuV/m, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 65 show 45.52dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.01dBuV/m (Peak), so the maximum field strength in restrict band is $104.01 - 45.52 = 58.49$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 66 show 53.65dBc delta between carrier maximum power and local maximum emission in restrict band (2.4847GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 94.57dBuV/m (Average), so the maximum field strength in restrict band is $94.57 - 53.65 = 40.92$ dBuV/m, which is under 54dBuV/m limit.

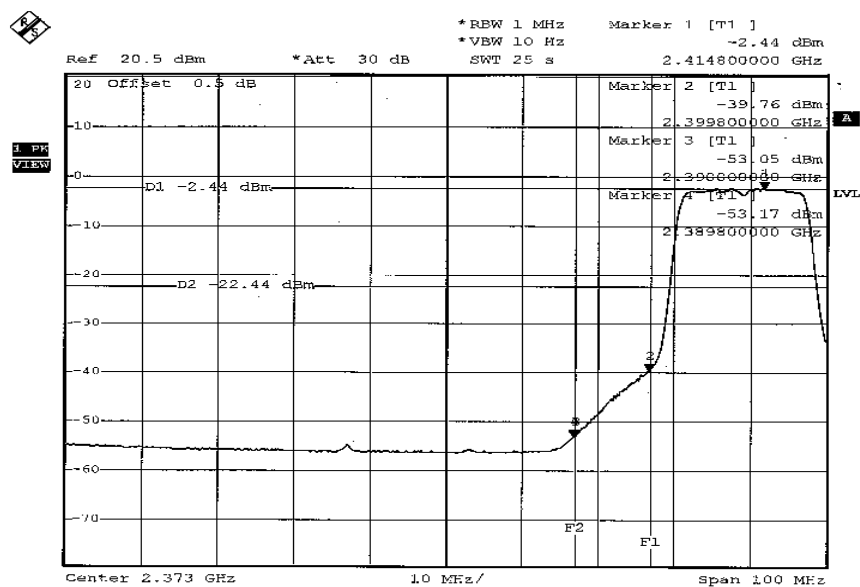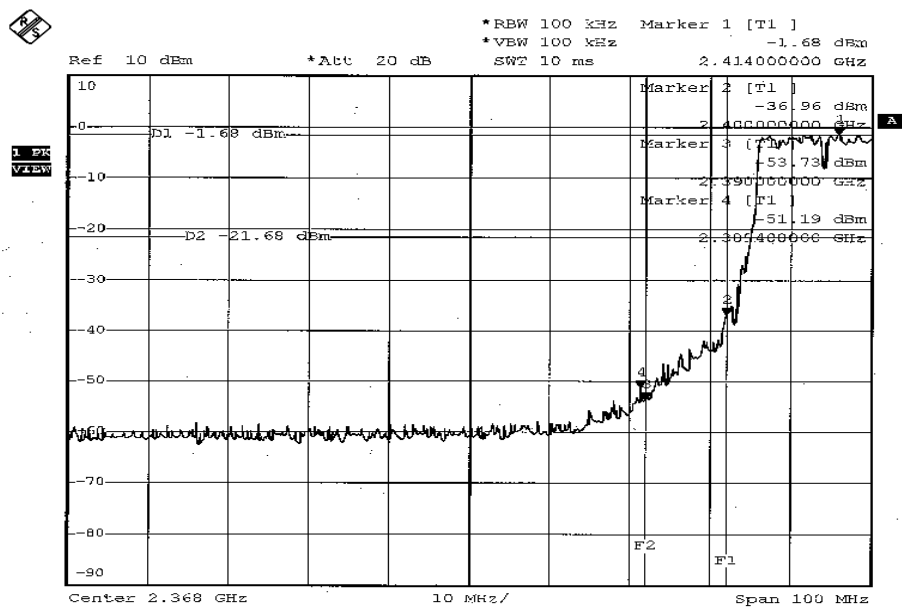

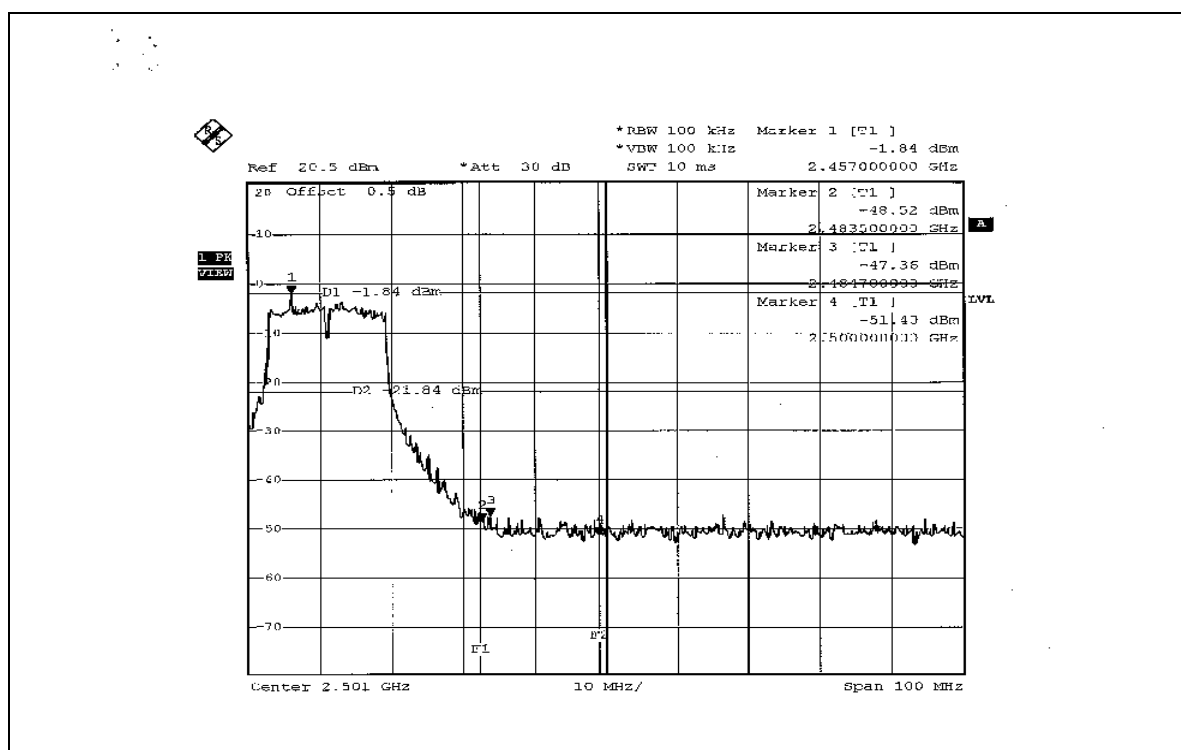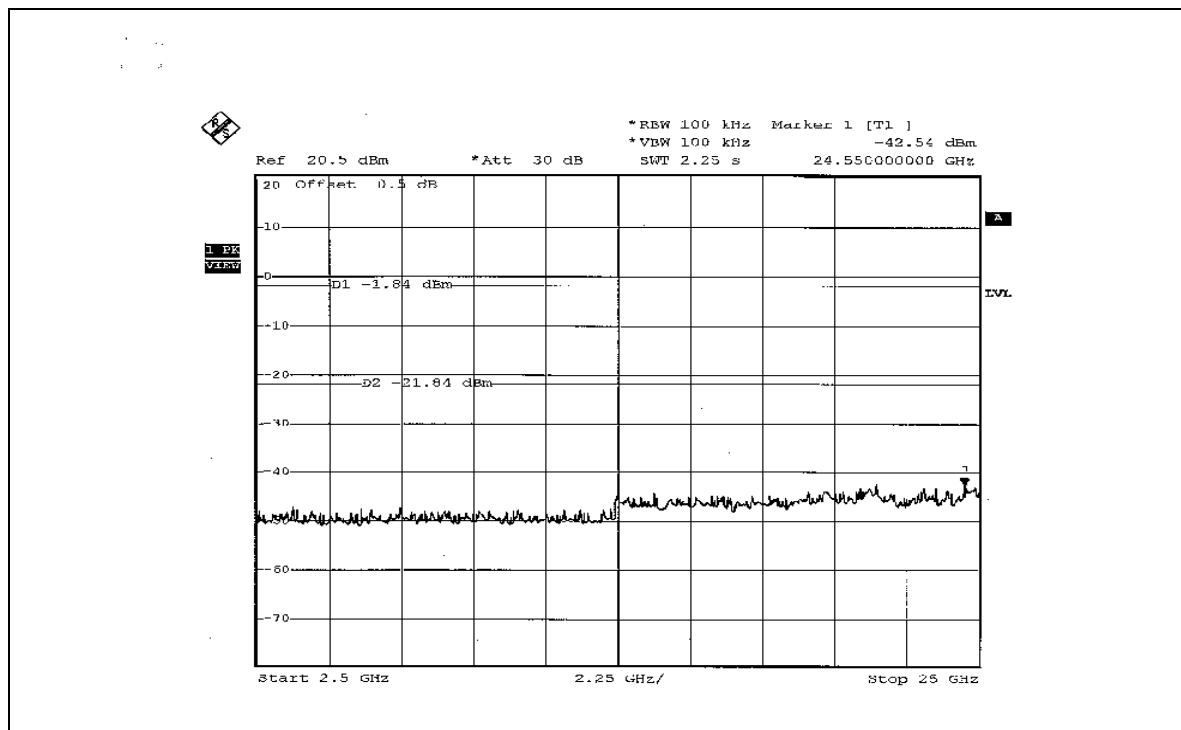

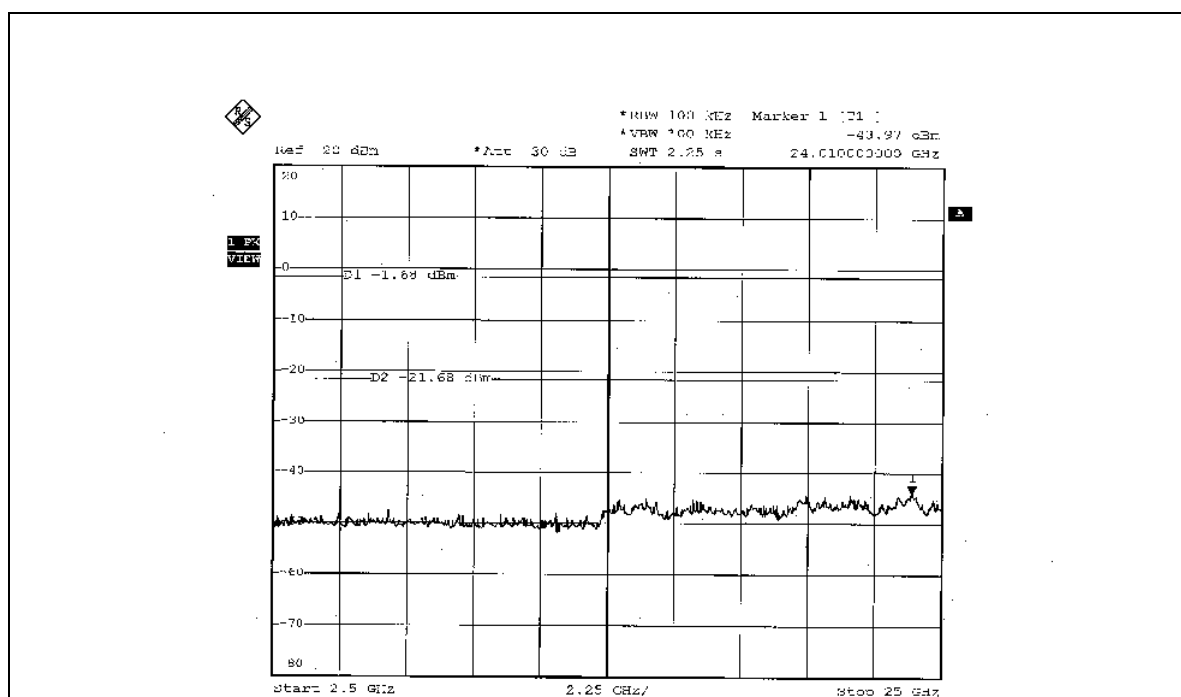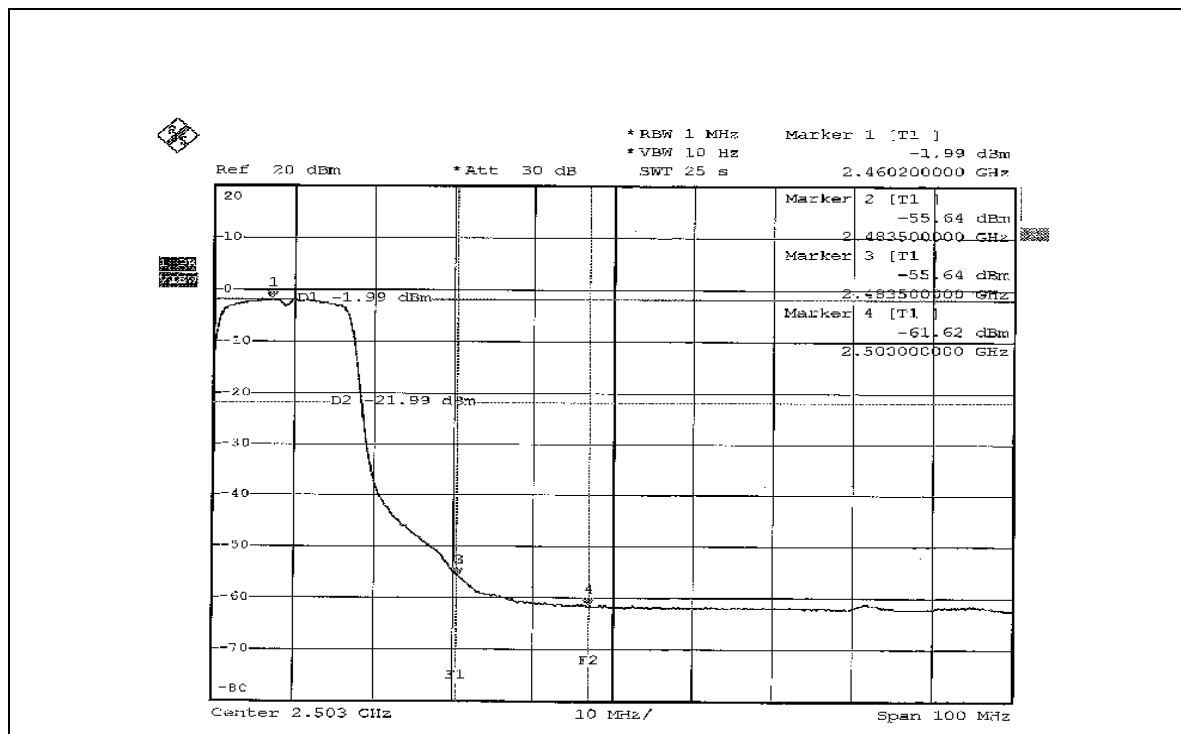



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is printed inverted F antenna without connector. And the maximum Gain of this antenna is 1dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST (Mode A)





(Mode B)



RADIATED EMISSION TEST (Mode A)

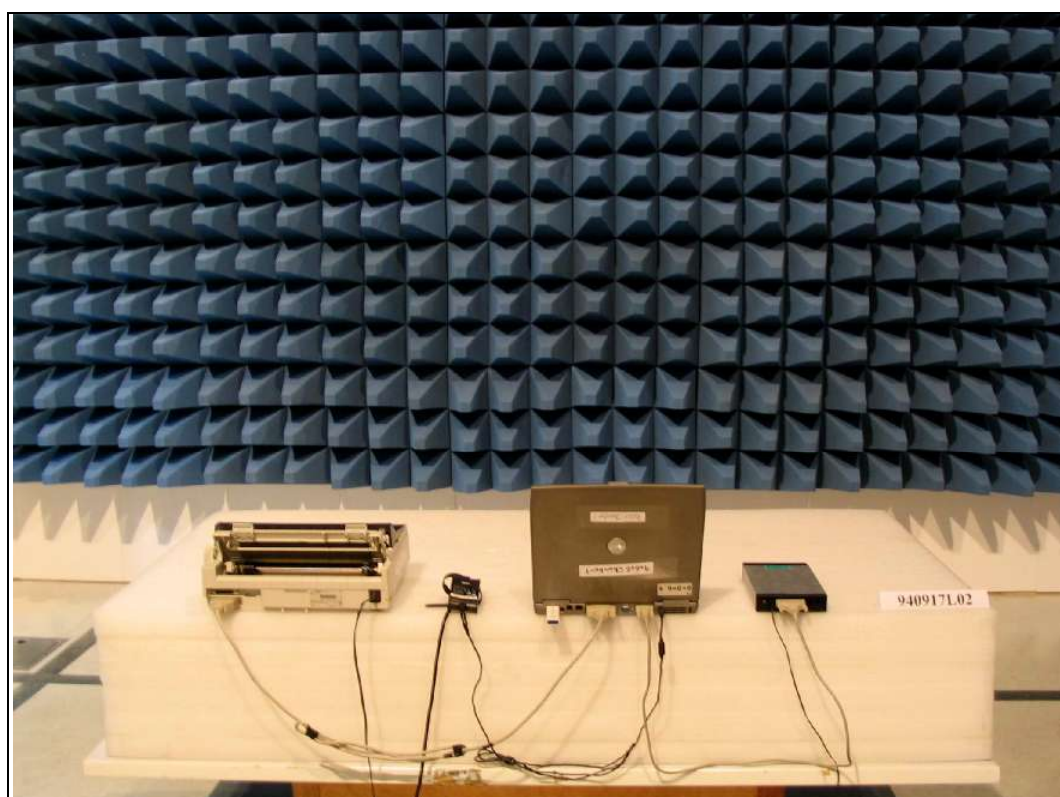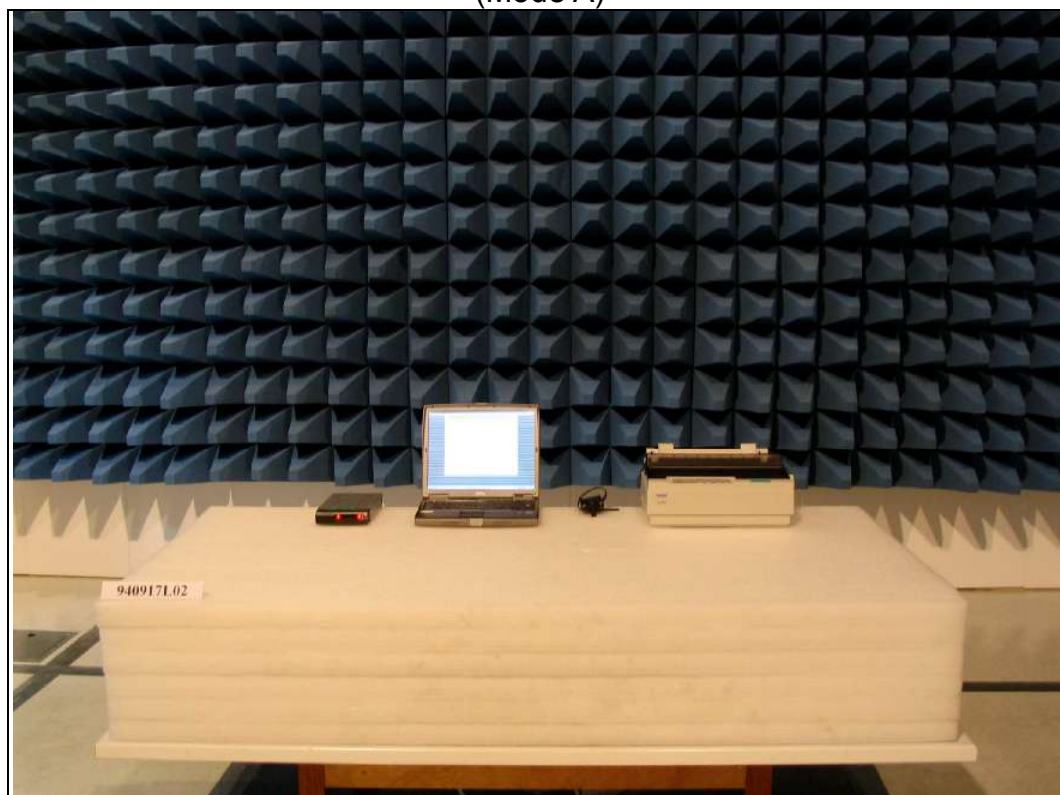

(Mode B)

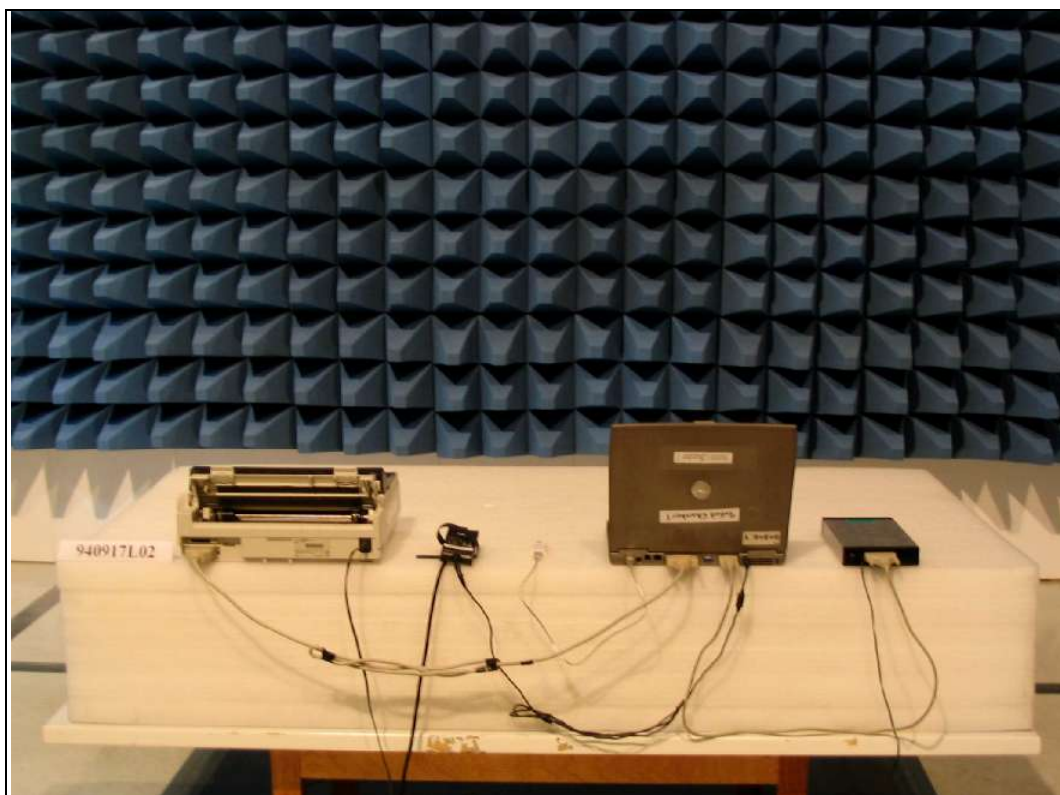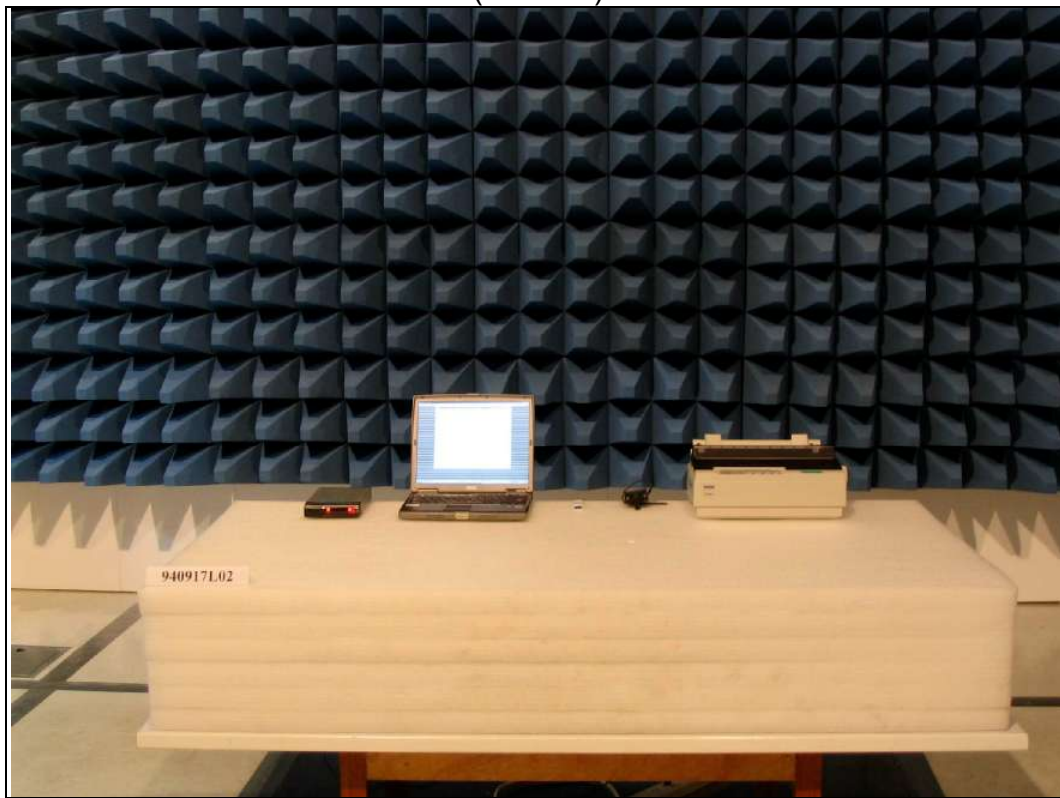

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.