

FCC RADIO TEST REPORT

Applicant's company	BUFFALO INC.
Applicant Address	4-15, Shibata Hondori, Minami-ku, Nagoya 457-8520, Japan
FCC ID	FDI-09102030-0
Manufacturer's company	Cameo Communications, Inc.
Manufacturer Address	No.42 Sec. 6, Mincyuan E. Rd., Neihu District, Taipei City 114, Taiwan

Product Name	EWC USB adapter
Brand Name	BUFFALO INC.
Model Name	WLI-U2-G300N
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Receive Date	Aug. 28, 2006
Final Test Date	Oct. 5, 2006
Submission Type	Original Equipment



Statement

Test result included is only for the 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Lab Code: 200079-0

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	6
3.9. Test Configurations	8
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Peak Output Power Measurement	17
4.3. Power Spectral Density Measurement	20
4.4. 6dB Spectrum Bandwidth Measurement	36
4.5. Radiated Emissions Measurement	52
4.6. Band Edge Emissions Measurement	116
4.7. Antenna Requirements	141
5. LIST OF MEASURING EQUIPMENTS	142
6. SPORTON COMPANY PROFILE	144
6.1. Test Location.....	144
7. NVLAP CERTIFICATE OF ACCREDITATION	145
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A7
APPENDIX B. TEST PHOTOS.....	B1 ~ B9
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C4



History of This Test Report

Original Issue Date: Oct. 19,2006

Report No.: FR682817AB

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : EWC USB adapter
Brand Name : BUFFALO INC.
Model Name : WLI-U2-G300N
Applicant : BUFFALO INC.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 28, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sharon Jiang 20.10.06

Prepared By:

Sharon Jiang / Specialist

Steven Lu 20.10.06

Tested By:

Steven Lu / Engineer

Wayne Hsu 20.10.06

Reviewed By:

Wayne Hsu

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.68 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	10.46 dB
4.3	15.247(e)	Power Spectral Density	Complies	16.3 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.21 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.00 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.26\text{dB}$	Confidence levels of 95%
Maximum Peak Conducted Output Power	$\pm 0.5\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 0.71\text{dB}$	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 6.25 \times 10^{-7}$	Confidence levels of 95%
Radiated Emissions/ Band Edge Emissions	$\pm 3.72\text{dB}$	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host system
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	11b(20MHz) : 13.52 MHz 11b(40MHz- Upper Link) : 13.60 MHz 11g(20MHz) : 16.68 MHz 11g(40MHz) : 36.48 MHz
Conducted Output Power	11b(20MHz) : 19.54 dBm 11b(40MHz- Upper Link) : 19.54 dBm 11g(20MHz) : 16.36 dBm 11g(40MHz) : 16.34 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11b	V	V	V	V
802.11g	V	V	V	V

3.2. Accessories

USB Cable	Cable Lenth
1	0.5m, Shielded
2	2m, Shielded (with Core)

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
A	SmartAnt	CAM04-050060	Dipole Antenna	UFL	2.00
B	SmartAnt	CAM04-050060	Dipole Antenna	UFL	2.00

3.4. Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11b & 802.11g.

For 20MHz bandwidth system, use Channel 1~ Channel 11

For 40MHz bandwidth system, use Channel 3~ Channel 9

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

For IEEE 802.11b, the two TX Ant. A & Ant. B could transmit simultaneously.

For IEEE 802.11g, the two TX Ant. A & Ant. B could transmit simultaneously.

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna	USB Cable
AC Power Line Conducted Emissions	Normal Link	11 Mbps	6	A+B	1 / 2
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK (20MHz)	1 Mbps	1/6/11	A / A+B	NA
	11b/BPSK (40MHz)	1 Mbps	3/6/9	A / A+B	NA
	11g/BPSK (20MHz)	6 Mbps	1/6/11	A / A+B	NA
	11g/BPSK (40MHz)	6 Mbps	3/6/9	A / A+B	NA
Radiated Emissions 9kHz~1GHz	11g/BPSK	6 Mbps	6	A / A+B	1 / 2
Radiated Emissions 1GHz~10 th Harmonic	11b/BPSK (20MHz)	1 Mbps	1/6/11	A / A+B	2
	11b/BPSK (40MHz)	1 Mbps	3/6/9	A / A+B	2
	11g/BPSK (20MHz)	6 Mbps	1/6/11	A / A+B	2
	11g/BPSK (40MHz)	6 Mbps	3/6/9	A / A+B	2
Band Edge Emissions	11b/BPSK (20MHz)	1 Mbps	1/11	A / A+B	2
	11b/BPSK (40MHz)	1 Mbps	3/9	A / A+B	2
	11g/BPSK (20MHz)	6 Mbps	1/11	A / A+B	2
	11g/BPSK (40MHz)	6 Mbps	3/9	A / A+B	2

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	E2K24GBRL
Printer	EPSON	LQ-300	DOC
Modem	ACEEX	DM-1414	IFAXDM1414
AP	3COM	AP2750	O9C-AP2750

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b 20MHz Ant. A Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. A	51	51	51

Power Parameters of IEEE 802.11b 20MHz Ant. A + Ant. B Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. A	51	51	51
IEEE 802.11b Ant. B	54	53	53

Power Parameters of IEEE 802.11b 40MHz Ant. A Antenna Transmitter

Test Software Version	DutApiClient_Usb					
Frequency	2422 MHz		2437 MHz		2452 MHz	
Link	Lower	Upper	Lower	Upper	Lower	Upper
IEEE 802.11b Ant. A	NA	52	52	52	52	NA

Power Parameters of IEEE 802.11b 40MHz Ant. A + Ant. B Antenna Transmitter

Test Software Version	DutApiClient_Usb					
Frequency	2422 MHz		2437 MHz		2452 MHz	
Link	Lower	Upper	Lower	Upper	Lower	Upper
IEEE 802.11b Ant. A	NA	52	52	52	52	NA
IEEE 802.11b Ant. B	NA	54	54	54	54	NA

Power Parameters of IEEE 802.11g 20MHz Ant. A Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g Ant. A	4D	4C	4C

Power Parameters of IEEE 802.11g 20MHz Ant. A + Ant. B Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g Ant. A	4D	4C	4C
IEEE 802.11g Ant. B	4F	4E	4E

Power Parameters of IEEE 802.11g 40MHz Ant. A Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11g Ant. A	4C	4C	4C

Power Parameters of IEEE 802.11g 40MHz Ant. A + Ant. B Antenna Transmitter

Test Software Version	DutApiClient_Usb		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11g Ant. A	4C	4C	4C
IEEE 802.11g Ant. B	4E	4E	4E

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

Turn on the power of all equipment.

The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.

The NB sends " H " messages to the printer, then the printer prints them on the paper.

The NB sends " H " messages to the modem.

At the same time, the following programs were executed:

Executed "ping.exe" to link with the remote workstation to receive and transmit data by WLAN.


Executed " DutApiClient_Usb " to control the EUT continuously transmit RF signal.

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


USB Cable 1

Test Configuration: 9KHz~1GHz

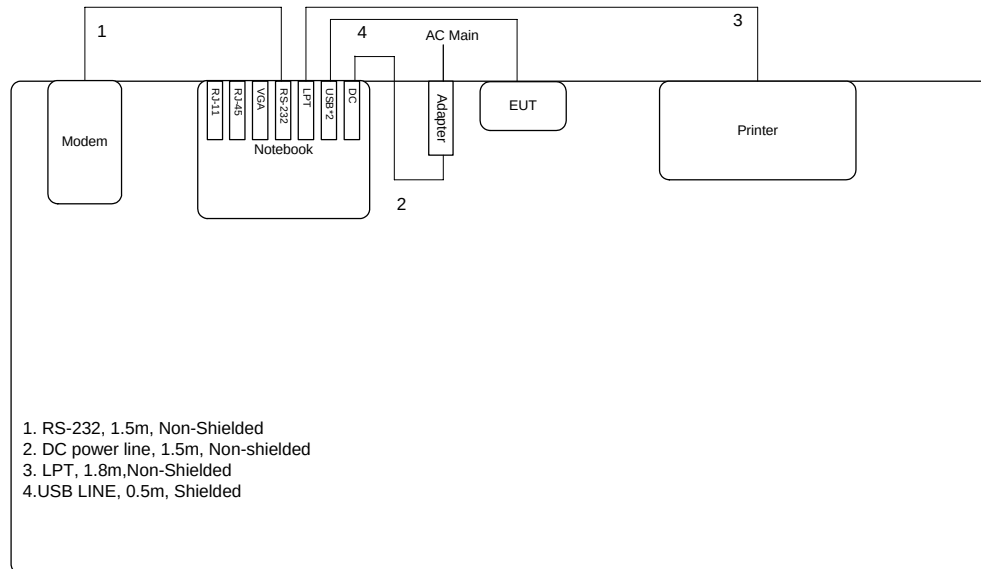


USB Cable 2

Test Configuration: 9KHz~1GHz

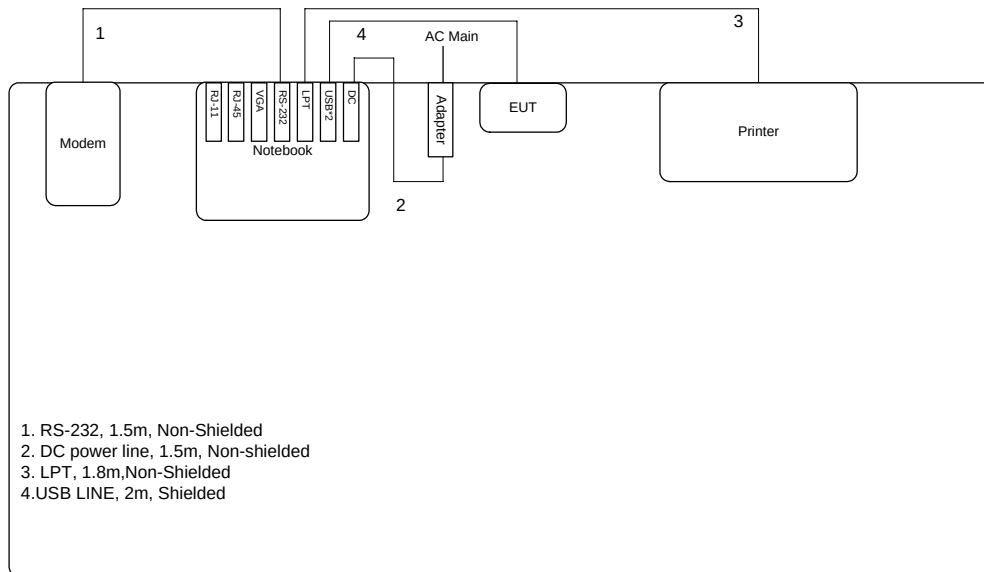


Test Configuration: above 1GHz

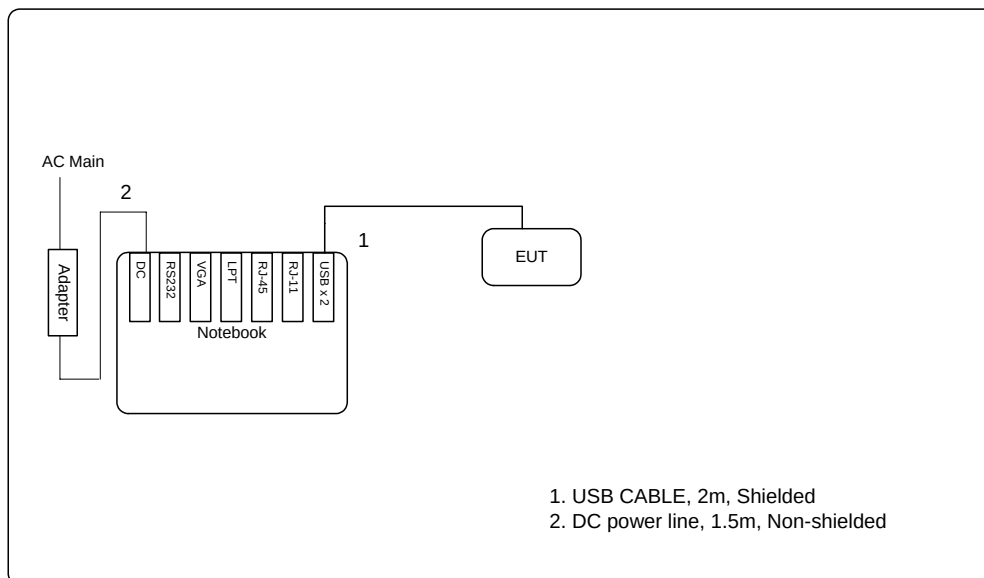


3.9.2. AC Power Line Conduction Emissions Test Configuration

USB Cable 1

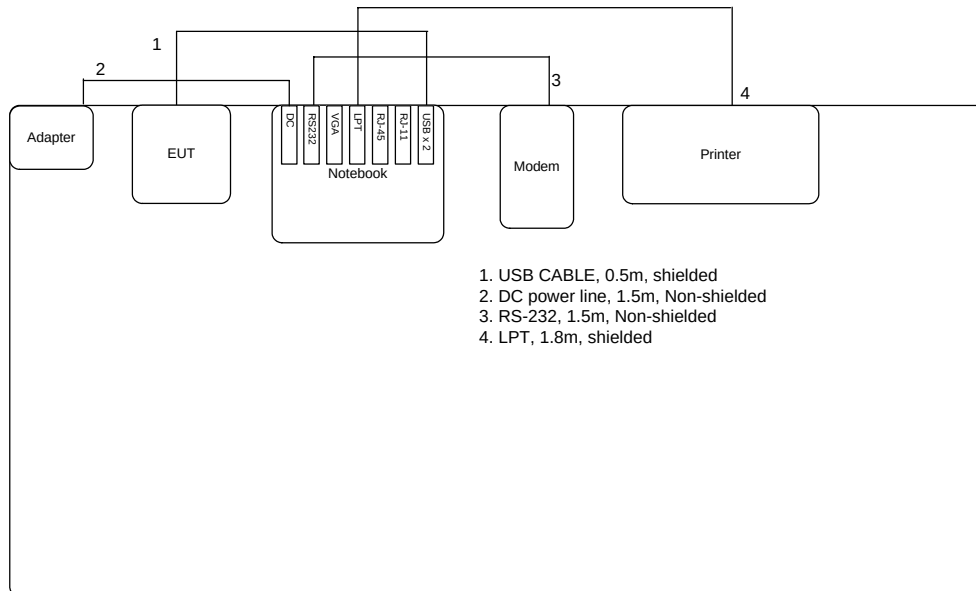

WLAN AP

USB Cable 2

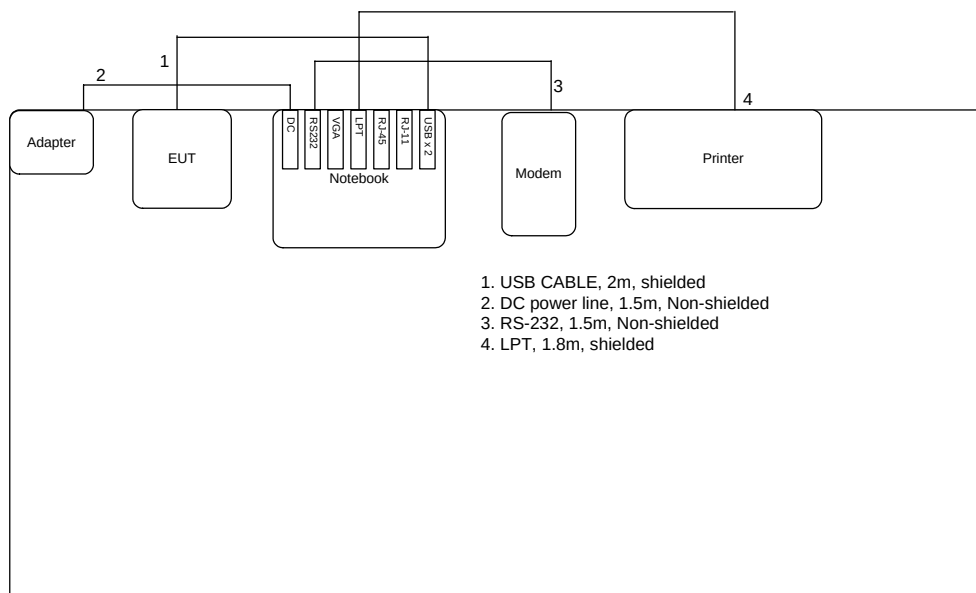

WLAN AP

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

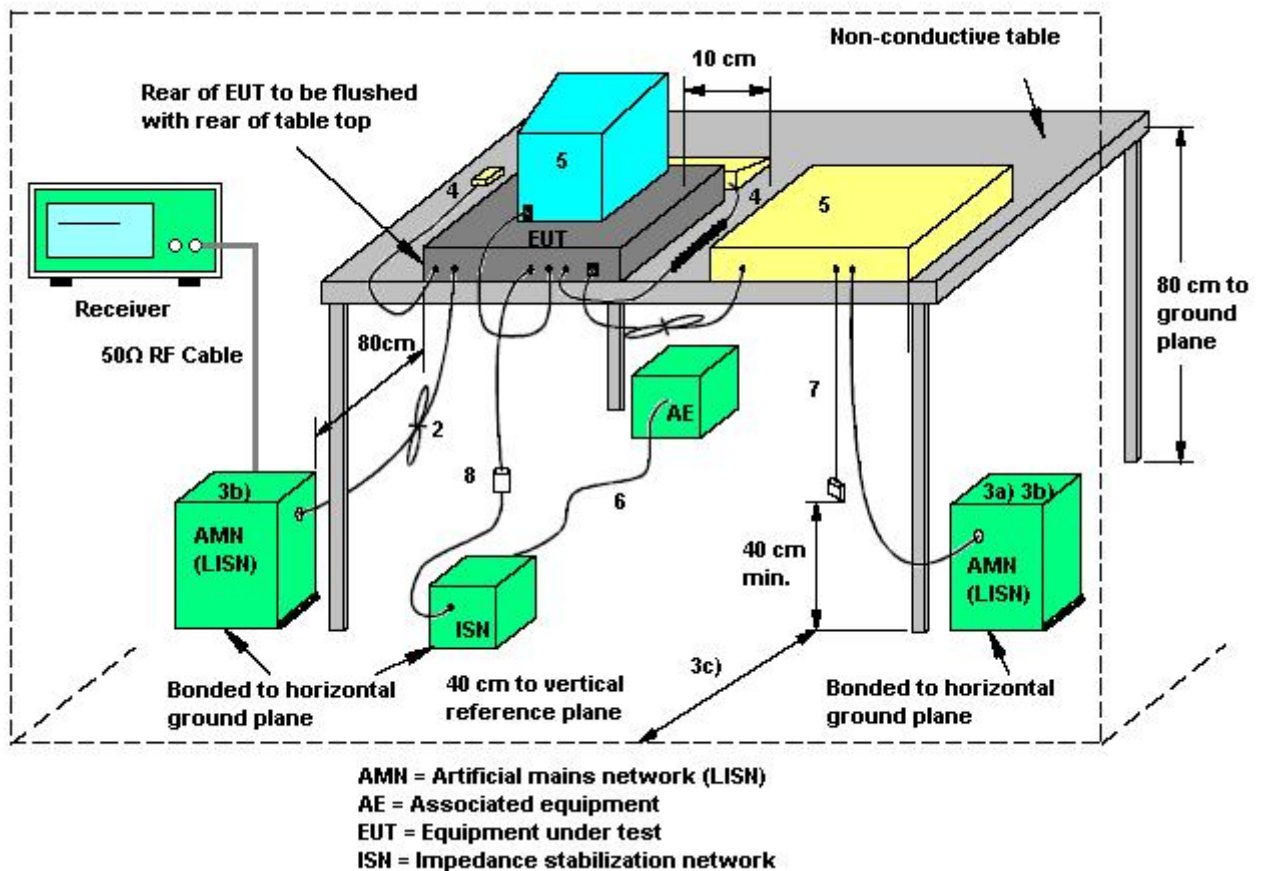

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0.1 m from the ISN.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	58%
Test Engineer	Leo Hung	Phase	Line
Configuration	Normal Link / USB Cable 1		

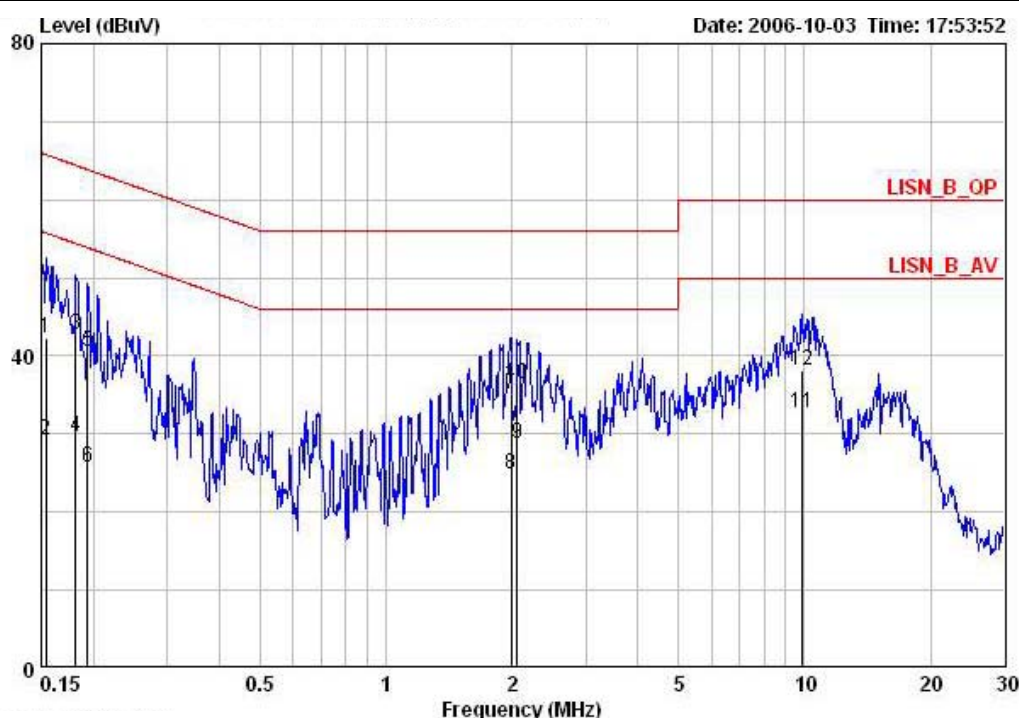

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15403	42.20	-23.58	65.78	39.96	2.04	0.20	QP
2	0.15403	29.13	-26.65	55.78	26.89	2.04	0.20	AVERAGE
3	0.18152	42.67	-21.74	64.42	40.88	1.59	0.20	QP
4	0.18152	29.74	-24.67	54.42	27.95	1.59	0.20	AVERAGE
5	0.19344	40.63	-23.26	63.89	39.26	1.17	0.20	QP
6	0.19344	25.81	-28.08	53.89	24.44	1.17	0.20	AVERAGE
7	1.991	35.19	-20.81	56.00	34.69	0.30	0.20	QP
8	1.991	24.85	-21.15	46.00	24.35	0.30	0.20	AVERAGE
9	2.055	28.73	-17.27	46.00	28.23	0.30	0.20	AVERAGE
10	2.055	36.40	-19.60	56.00	35.90	0.30	0.20	QP
11	9.913	32.79	-17.21	50.00	32.19	0.30	0.30	AVERAGE
12	9.913	38.11	-21.89	60.00	37.51	0.30	0.30	QP

Temperature	24°C	Humidity	64%
Test Engineer	Leo Hung	Phase	Neutral
Configuration	Normal Link / USB Cable 1		

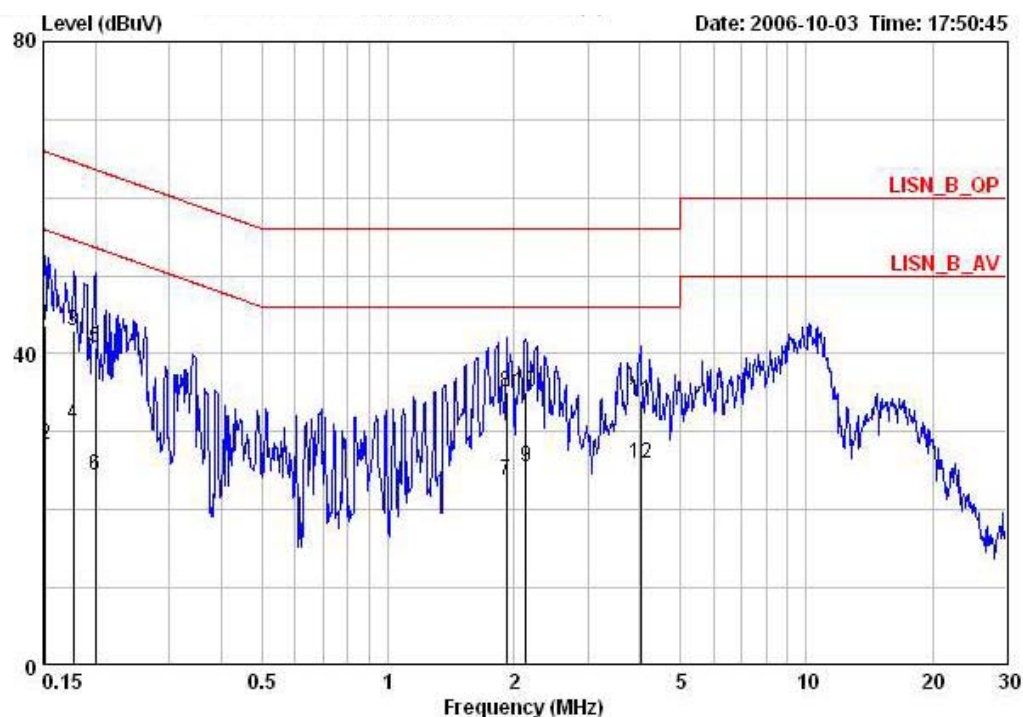


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15160	43.53	-22.38	65.91	41.43	1.90	0.20	QP
2	0.15160	28.29	-27.62	55.91	26.19	1.90	0.20	AVERAGE
3	0.17678	42.90	-21.74	64.64	41.14	1.56	0.20	QP
4	0.17678	30.95	-23.69	54.64	29.19	1.56	0.20	AVERAGE
5	0.19969	40.70	-22.92	63.62	39.30	1.20	0.20	QP
6	0.19969	24.43	-29.19	53.62	23.03	1.20	0.20	AVERAGE
7	1.918	23.73	-22.27	46.00	23.33	0.21	0.19	AVERAGE
8	1.918	35.17	-20.83	56.00	34.77	0.21	0.19	QP
9	2.133	25.54	-20.46	46.00	25.11	0.23	0.20	AVERAGE
10	2.133	35.16	-20.84	56.00	34.73	0.23	0.20	QP
11	4.006	34.03	-21.97	56.00	33.43	0.30	0.30	QP
12	4.006	25.95	-20.05	46.00	25.35	0.30	0.30	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	24°C	Humidity	58%
Test Engineer	Leo Hung	Phase	Line
Configuration	Normal Link / USB Cable 2		

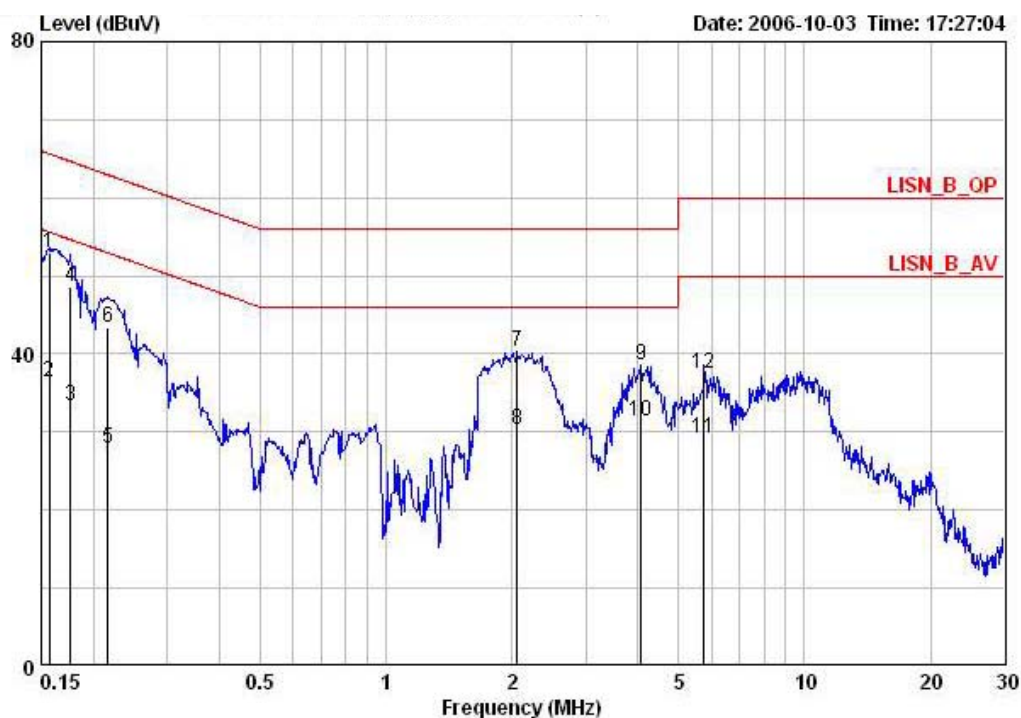

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBrV	dB	dBrV	dBrV	dB	dB	
1	0.15650	52.97	-12.68	65.65	50.70	2.07	0.20	QP
2	0.15650	36.34	-19.31	55.65	34.07	2.07	0.20	AVERAGE
3	0.17584	33.29	-21.39	54.68	31.31	1.78	0.20	AVERAGE
4	0.17584	48.54	-16.14	64.68	46.56	1.78	0.20	QP
5	0.21620	27.85	-25.12	52.96	26.51	1.14	0.20	AVERAGE
6	0.21620	43.48	-19.49	62.96	42.14	1.14	0.20	QP
7	2.055	40.23	-15.77	56.00	39.73	0.30	0.20	QP
8	2.055	30.23	-15.77	46.00	29.73	0.30	0.20	AVERAGE
9	4.070	38.57	-17.43	56.00	37.88	0.39	0.30	QP
10	4.070	31.34	-14.66	46.00	30.65	0.39	0.30	AVERAGE
11	5.744	29.12	-20.88	50.00	28.52	0.30	0.30	AVERAGE
12	5.744	37.56	-22.44	60.00	36.96	0.30	0.30	QP

Temperature	24°C	Humidity	64%
Test Engineer	Leo Hung	Phase	Neutral
Configuration	Normal Link / USB Cable 2		

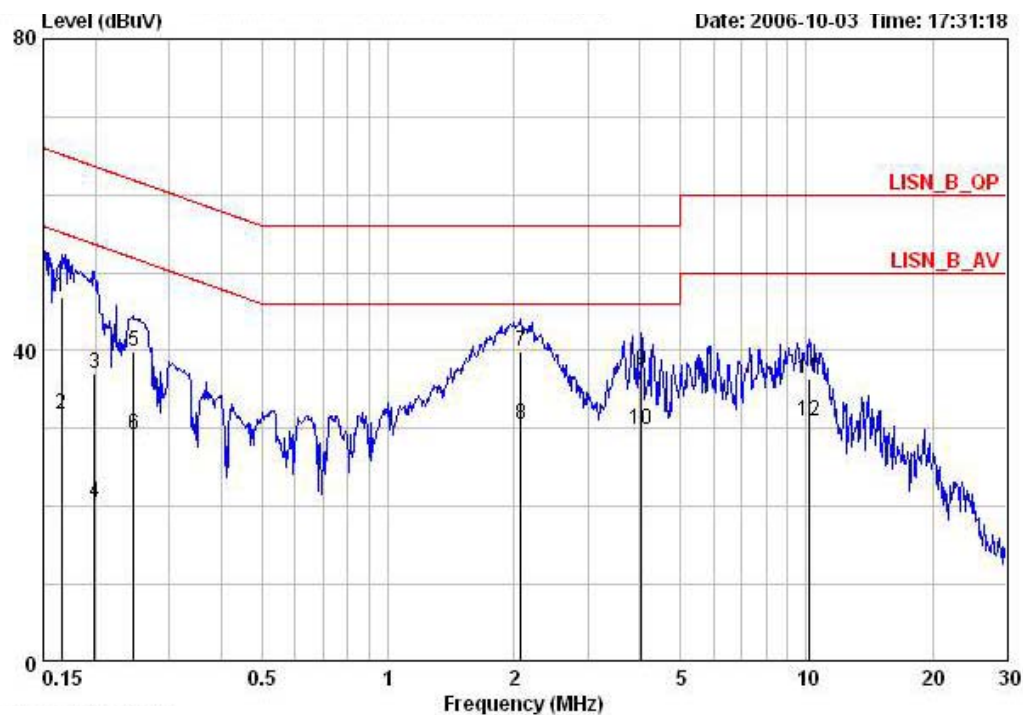

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16589	46.88	-18.28	65.16	44.90	1.78	0.20	QP
2	0.16589	31.86	-23.30	55.16	29.88	1.78	0.20	AVERAGE
3	0.19863	37.07	-26.60	63.67	35.69	1.18	0.20	QP
4	0.19863	20.39	-33.28	53.67	19.01	1.18	0.20	AVERAGE
5	0.24682	39.92	-21.94	61.86	38.89	0.83	0.20	QP
6	0.24682	29.21	-22.65	51.86	28.18	0.83	0.20	AVERAGE
7 ☒	2.077	39.86	-16.14	56.00	39.44	0.22	0.20	QP
8 ☒	2.077	30.60	-15.40	46.00	30.18	0.22	0.20	AVERAGE
9	4.027	37.52	-18.48	56.00	36.92	0.30	0.30	QP
10 ☒	4.027	29.80	-16.20	46.00	29.20	0.30	0.30	AVERAGE
11	10.125	36.39	-23.61	60.00	35.77	0.30	0.32	QP
12	10.125	30.95	-19.05	50.00	30.33	0.30	0.32	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

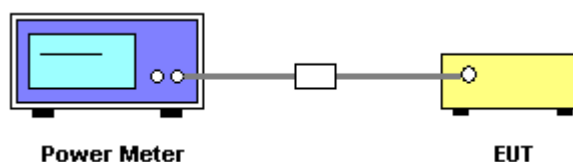

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	24°C	Humidity	58%
Test Engineer	Leo Hung	Configurations	802.11b/g

Configuration IEEE 802.11b 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.57	30.00	Complies
6	2437 MHz	16.47	30.00	Complies
11	2462 MHz	16.54	30.00	Complies

Configuration IEEE 802.11b 20MHz Ant. A + Ant. B

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.57	16.5	19.54	30.00	Complies
6	2437 MHz	16.47	16.28	19.38	30.00	Complies
11	2462 MHz	16.54	16.36	19.46	30.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Lower

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	NA	30.00	Complies
6	2437 MHz	16.35	30.00	Complies
9	2452 MHz	16.4	30.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Lower

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	NA	NA	NA	30.00	Complies
6	2437 MHz	16.35	16.25	18.04	30.00	Complies
9	2452 MHz	16.4	16.22	19.32	30.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Upper

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	16.6	30.00	Complies
6	2437 MHz	16.52	30.00	Complies
9	2452 MHz	NA	30.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Upper

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	16.6	16.47	19.54	30.00	Complies
6	2437 MHz	16.52	16.14	19.34	30.00	Complies
9	2452 MHz	NA	NA	NA	30.00	Complies

Configuration IEEE 802.11g 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.55	30.00	Complies
6	2437 MHz	13.3	30.00	Complies
11	2462 MHz	13.25	30.00	Complies

Configuration IEEE 802.11g 20MHz Ant. A + Ant. B

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.55	13.15	16.36	30.00	Complies
6	2437 MHz	13.3	13.26	16.29	30.00	Complies
11	2462 MHz	13.25	13.14	16.20	30.00	Complies

Configuration IEEE 802.11g 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.36	30.00	Complies
6	2437 MHz	13.47	30.00	Complies
9	2452 MHz	13.24	30.00	Complies

Configuration IEEE 802.11g 40MHz Ant. A + Ant. B

Channel	Frequency	Ant. A Port (dBm)	Ant. B Port (dBm)	Combination Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.36	13.18	16.28	30.00	Complies
6	2437 MHz	13.47	13.2	16.34	30.00	Complies
9	2452 MHz	13.24	13.22	16.24	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

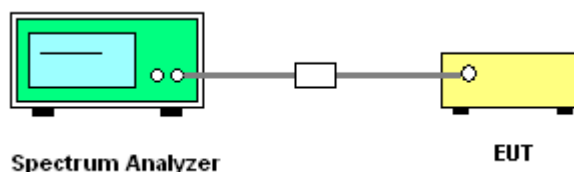

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	58%
Test Engineer	Leo Hung	Configurations	802.11b/g

Configuration IEEE 802.11b 20MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-14.96	8.00	Complies
6	2437 MHz	-14.83	8.00	Complies
11	2462 MHz	-14.75	8.00	Complies

Configuration IEEE 802.11b 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-10.18	8.00	Complies
6	2437 MHz	-10.11	8.00	Complies
11	2462 MHz	-10.15	8.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Lower

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	NA	8.00	Complies
6	2437 MHz	-14.67	8.00	Complies
9	2452 MHz	-14.75	8.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Lower

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	NA	8.00	Complies
6	2437 MHz	-8.53	8.00	Complies
9	2452 MHz	-8.3	8.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Upper

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-14.55	8.00	Complies
6	2437 MHz	-14.94	8.00	Complies
9	2452 MHz	NA	8.00	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Upper

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-8.88	8.00	Complies
6	2437 MHz	-8.88	8.00	Complies
9	2452 MHz	NA	8.00	Complies

Configuration IEEE 802.11g 20MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-19.39	8.00	Complies
6	2437 MHz	-20.07	8.00	Complies
11	2462 MHz	-19.67	8.00	Complies

Configuration IEEE 802.11g 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-15.52	8.00	Complies
6	2437 MHz	-15.2	8.00	Complies
11	2462 MHz	-15.61	8.00	Complies


Configuration IEEE 802.11g 40MHz Ant. A

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-23.46	8.00	Complies
6	2437 MHz	-23.58	8.00	Complies
9	2452 MHz	-24.02	8.00	Complies

Configuration IEEE 802.11g 40MHz Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-18.52	8.00	Complies
6	2437 MHz	-17.89	8.00	Complies
9	2452 MHz	-18.07	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2412 MHz

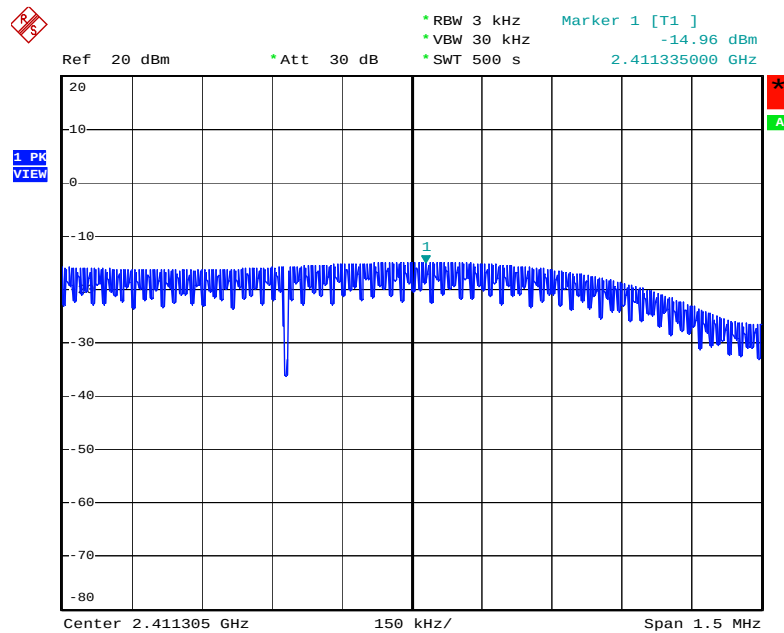


Date: 3.OCT.2006 09:02:33

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2437 MHz

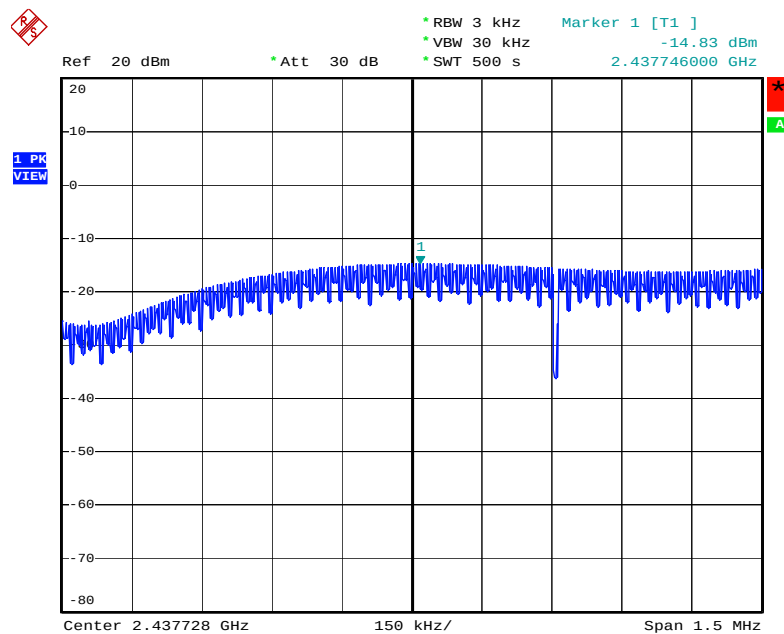


Date: 3.OCT.2006 09:03:43

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2462 MHz

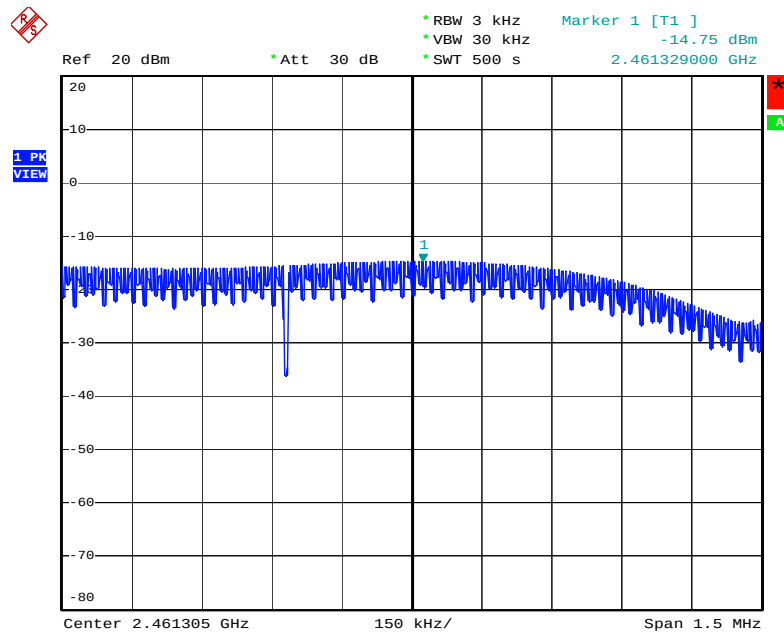


Date: 3.OCT.2006 09:04:37

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2412 MHz

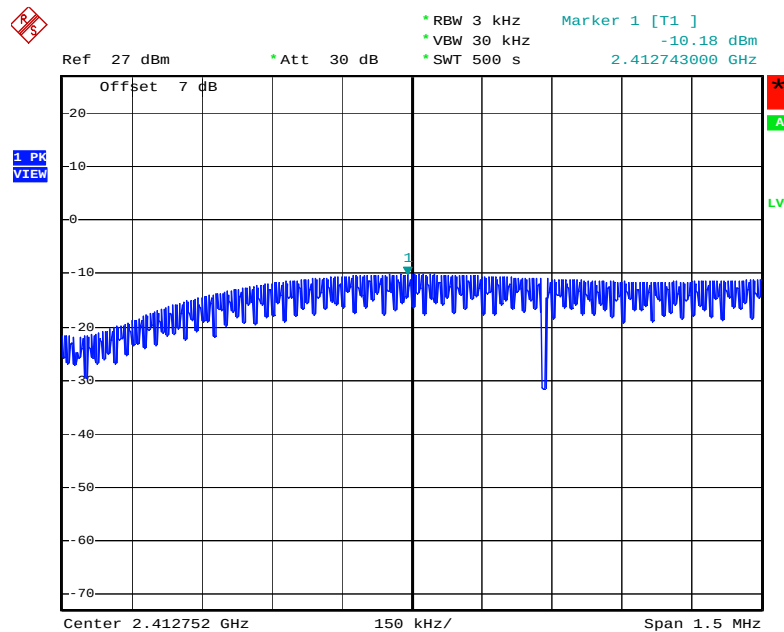


Date: 3.OCT.2006 08:36:31

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2437 MHz

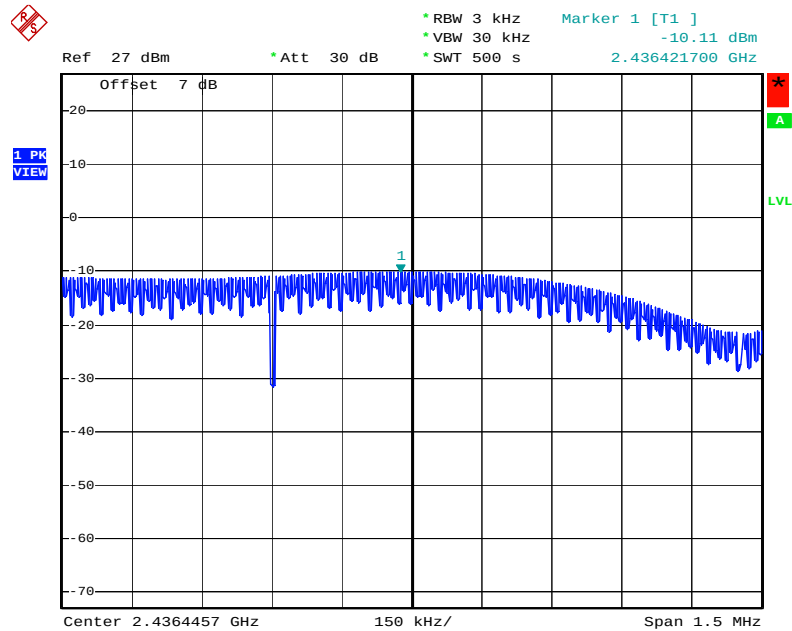


Date: 3.OCT.2006 08:55:19

Power Density Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2462 MHz

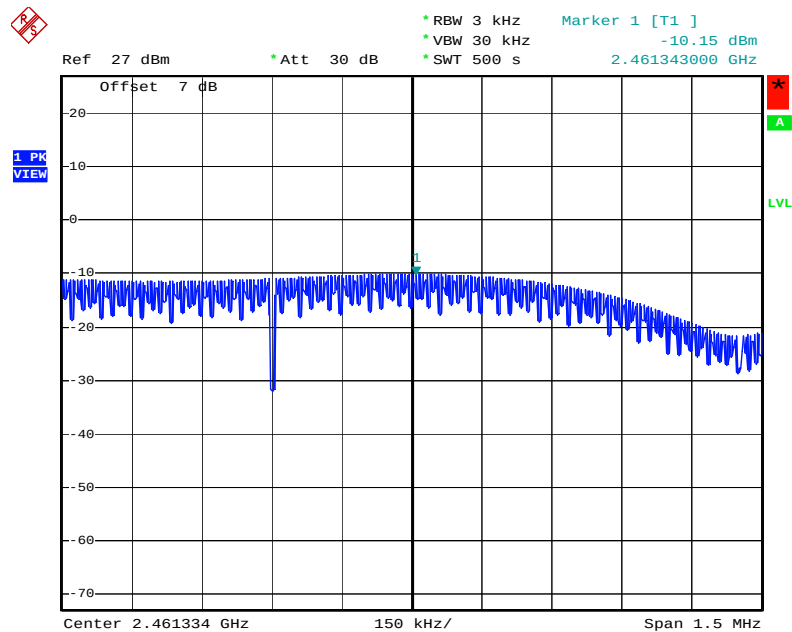


Date: 3.OCT.2006 08:54:48

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2422 MHz (Upper)

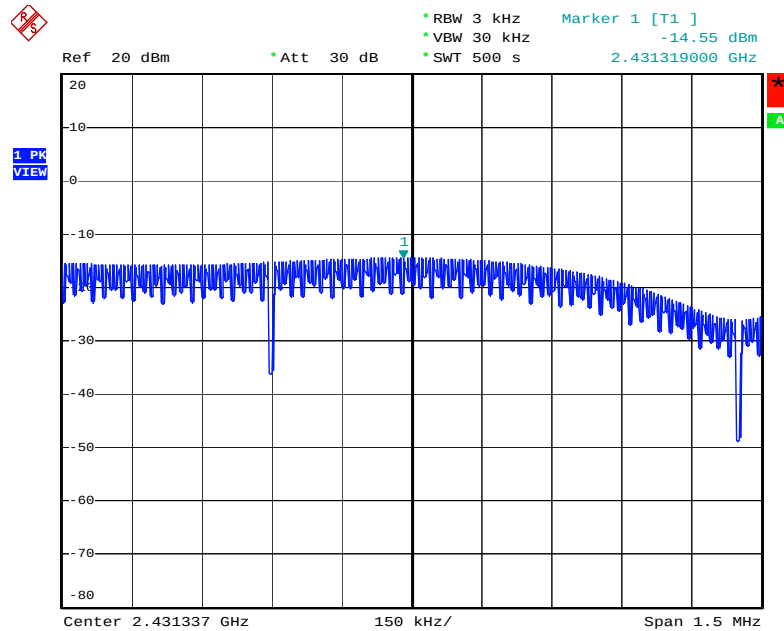


Date: 3.OCT.2006 09:36:14

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2437 MHz (Lower)

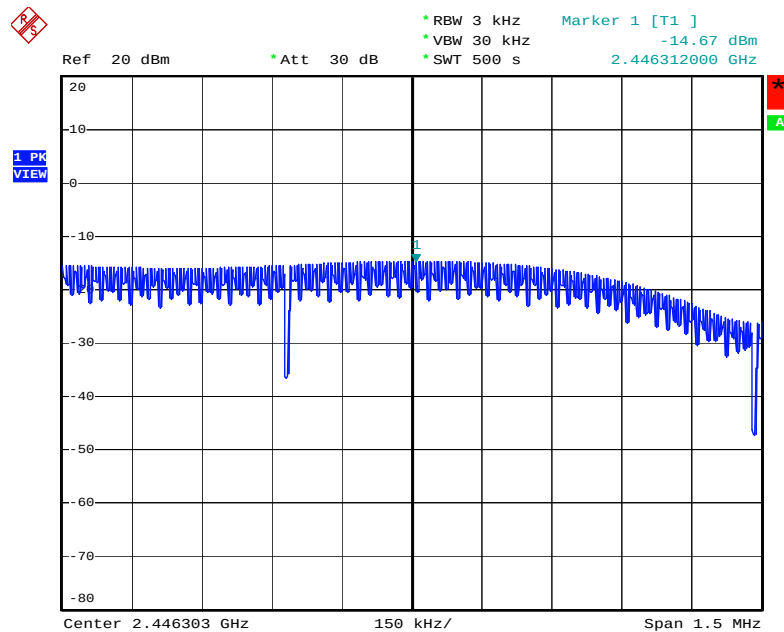


Date: 3.OCT.2006 09:37:56

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2437 MHz (Upper)

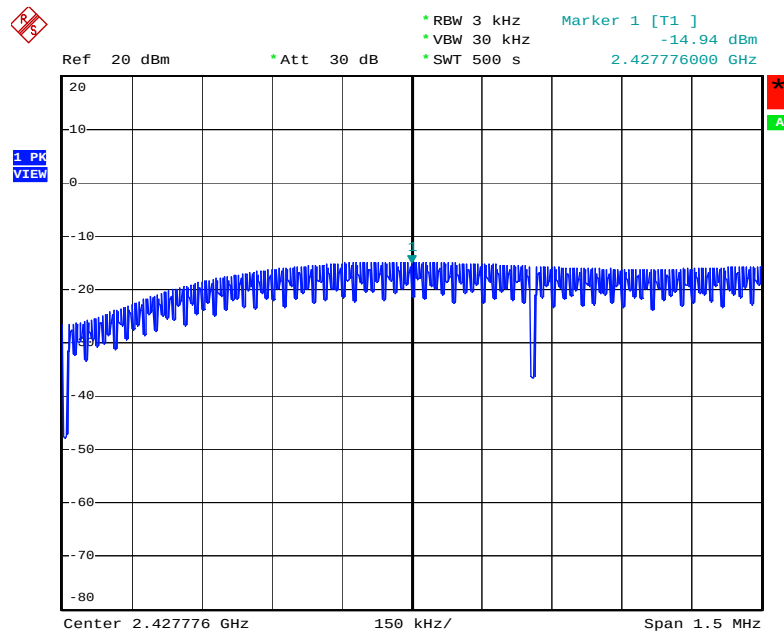


Date: 3.OCT.2006 09:42:47

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2452 MHz (Lower)

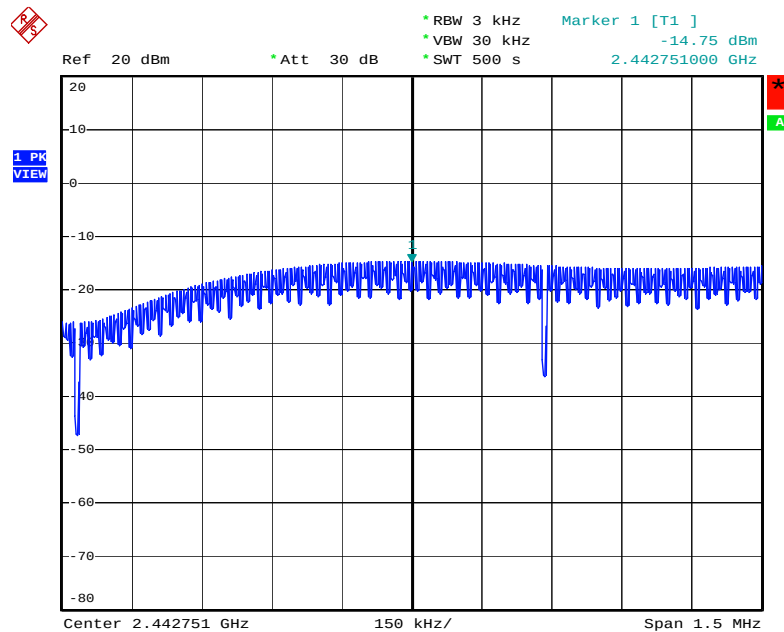


Date: 3.OCT.2006 09:39:21

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2422 MHz (Upper)

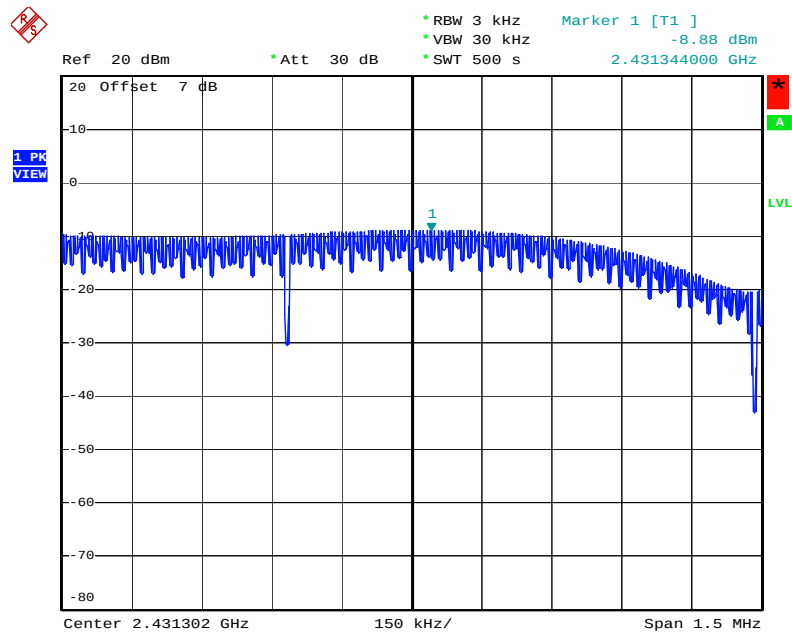


Date: 3.OCT.2006 05:56:01

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2437 MHz (Lower)

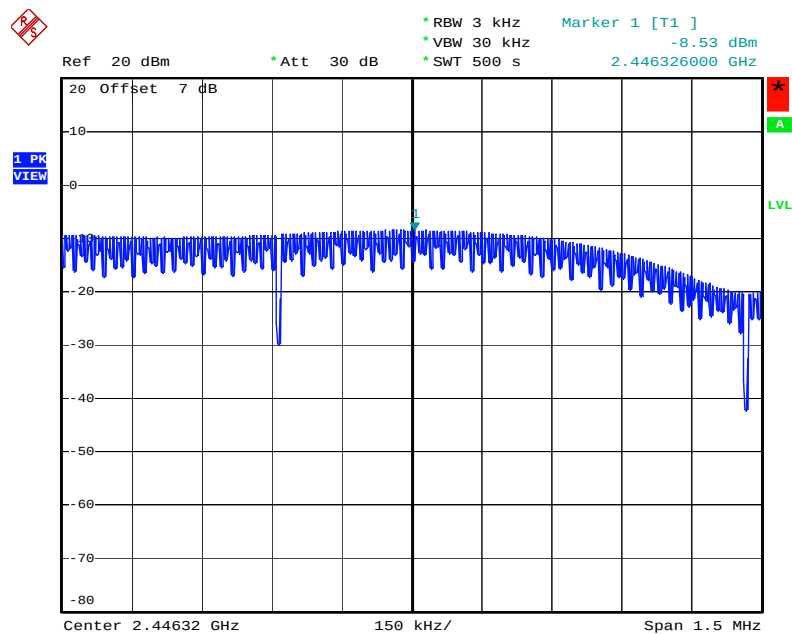


Date: 3.OCT.2006 07:34:36

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2437 MHz (Upper)

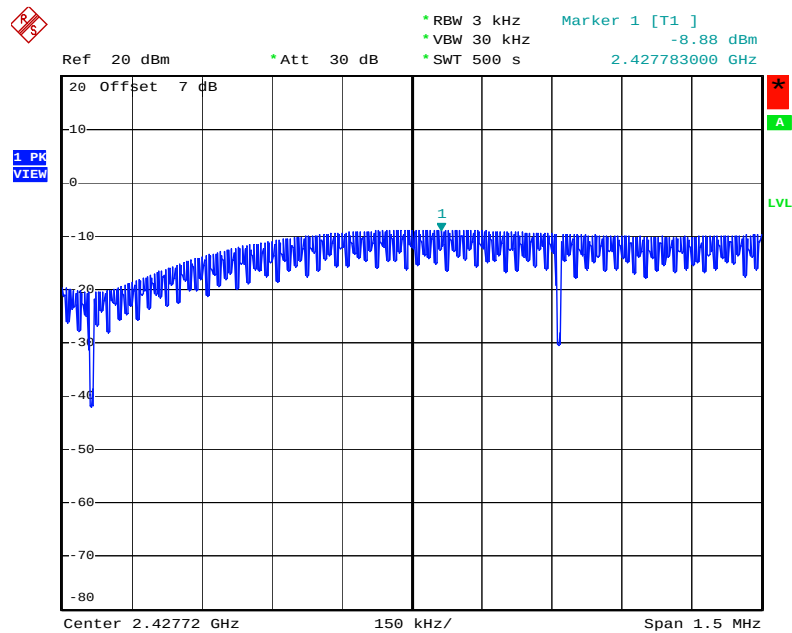


Date: 3.OCT.2006 07:35:43

Power Density Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2452 MHz (Lower)

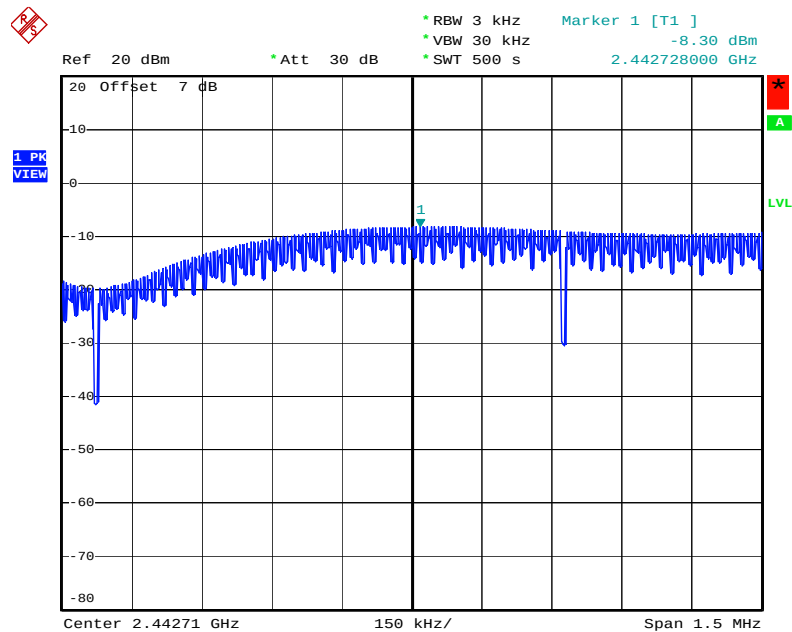


Date: 3.OCT.2006 07:39:04

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2412 MHz

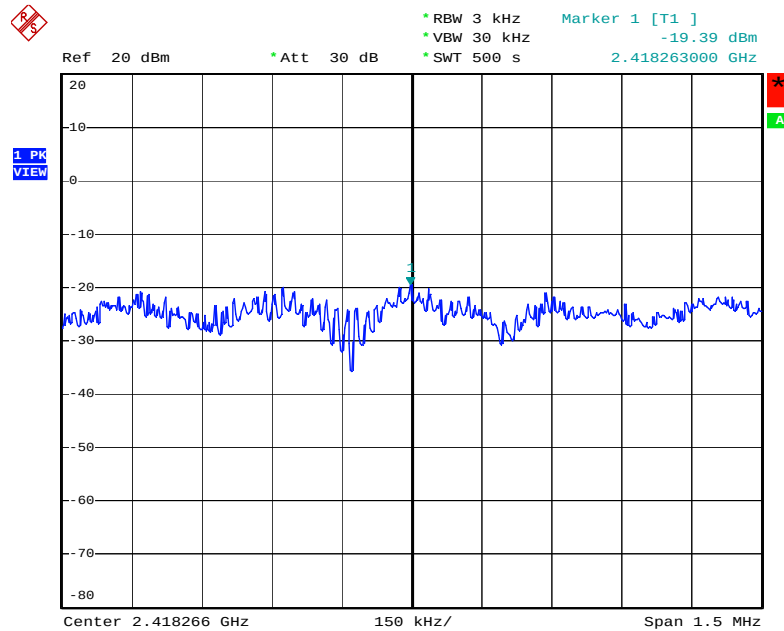


Date: 3.OCT.2006 09:08:03

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2437 MHz

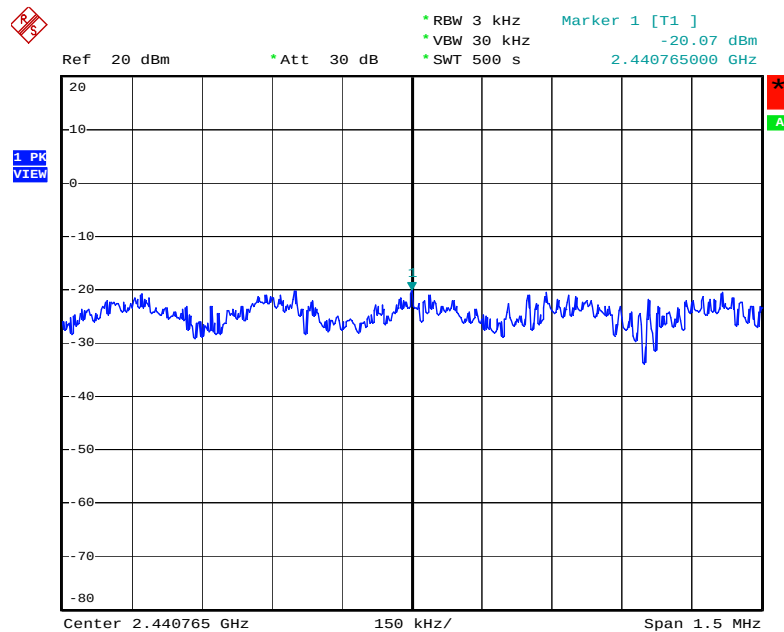


Date: 3.OCT.2006 09:09:17

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2462 MHz

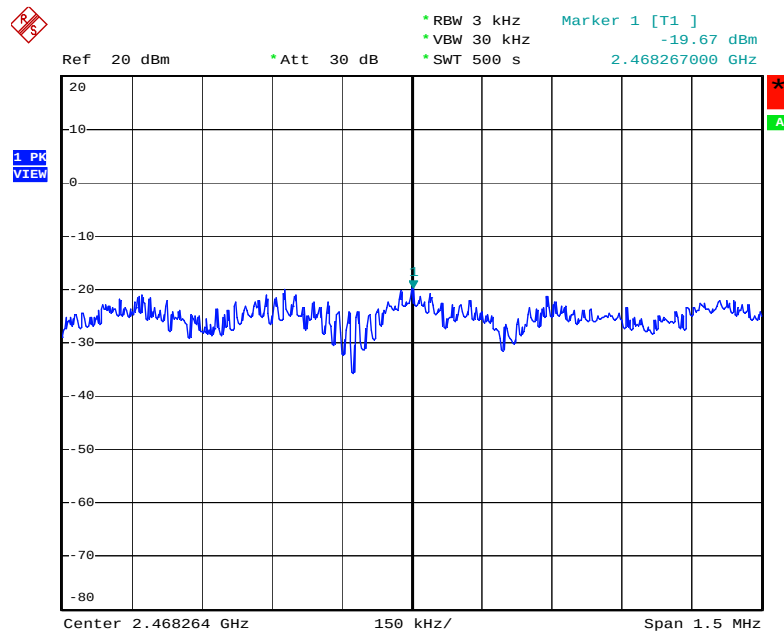


Date: 3.OCT.2006 09:10:03

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A + Ant. B / 2412 MHz

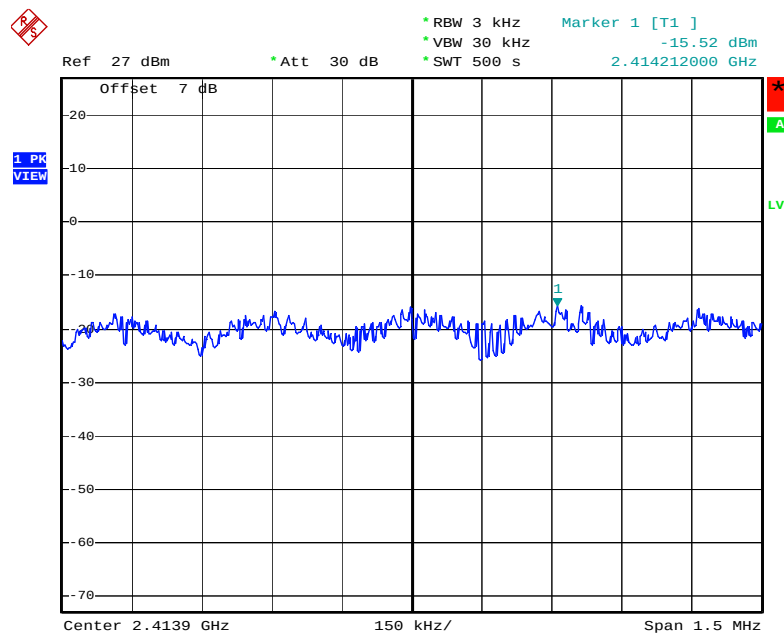


Date: 3.OCT.2006 08:26:54

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A + Ant. B / 2437 MHz

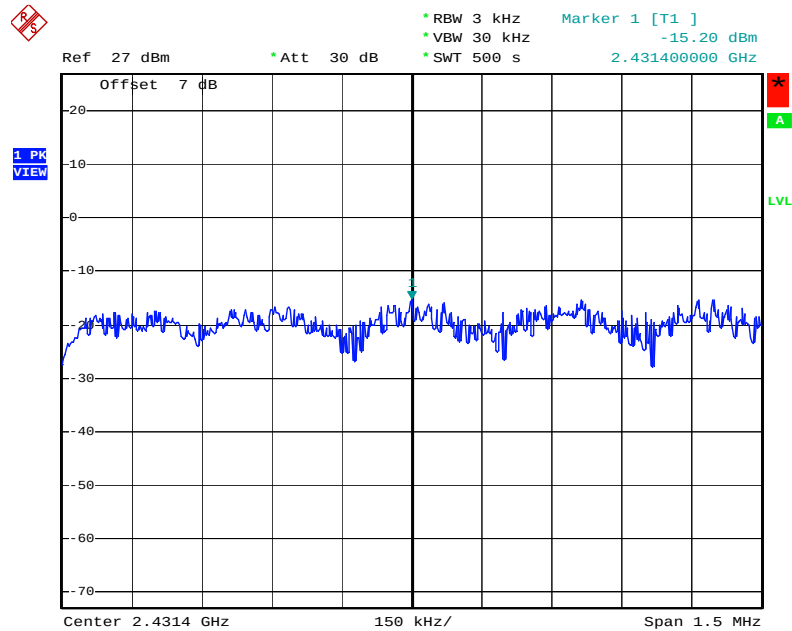


Date: 3.OCT.2006 08:29:03

Power Density Plot on Configuration IEEE 802.11g 20MHz Ant. A + Ant. B / 2462 MHz

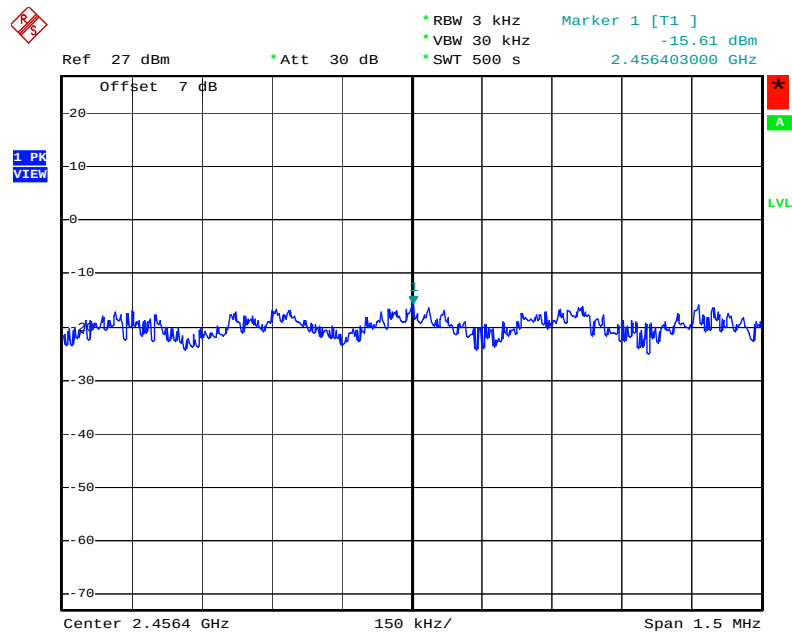


Date: 3.OCT.2006 08:30:11

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A / 2422 MHz

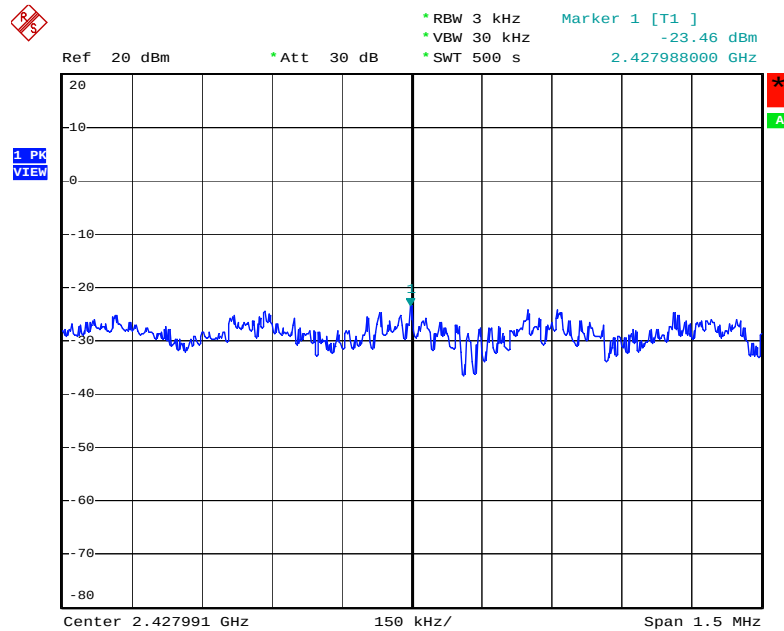


Date: 3.OCT.2006 09:30:05

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A / 2437 MHz

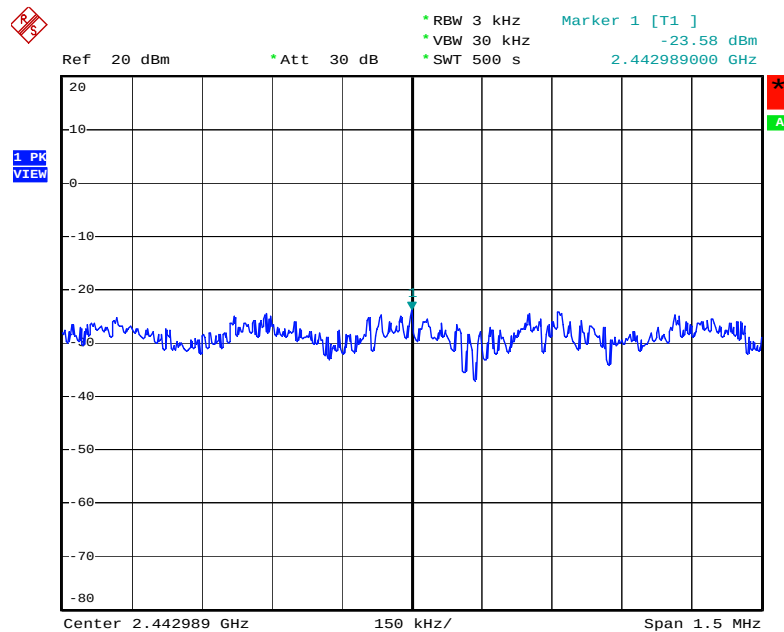


Date: 3.OCT.2006 09:31:18

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A / 2452 MHz

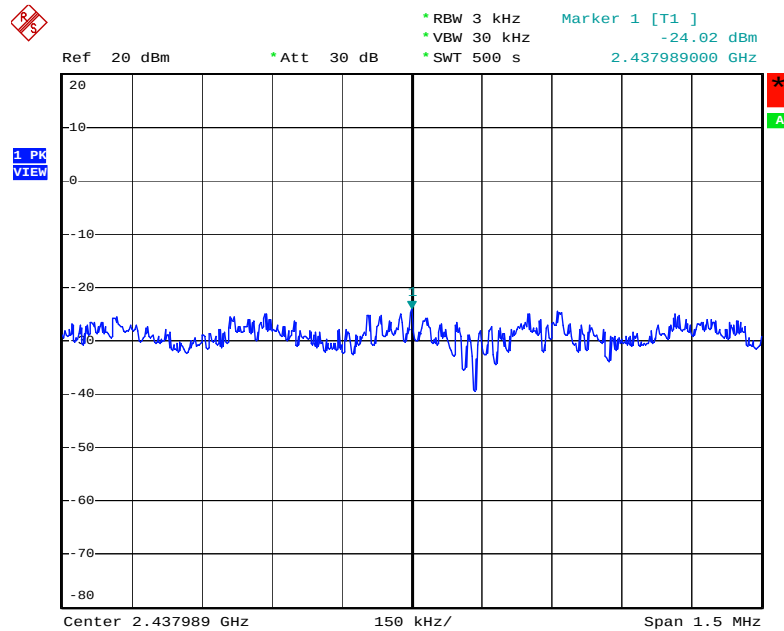


Date: 3.OCT.2006 09:32:11

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A + Ant. B / 2422 MHz

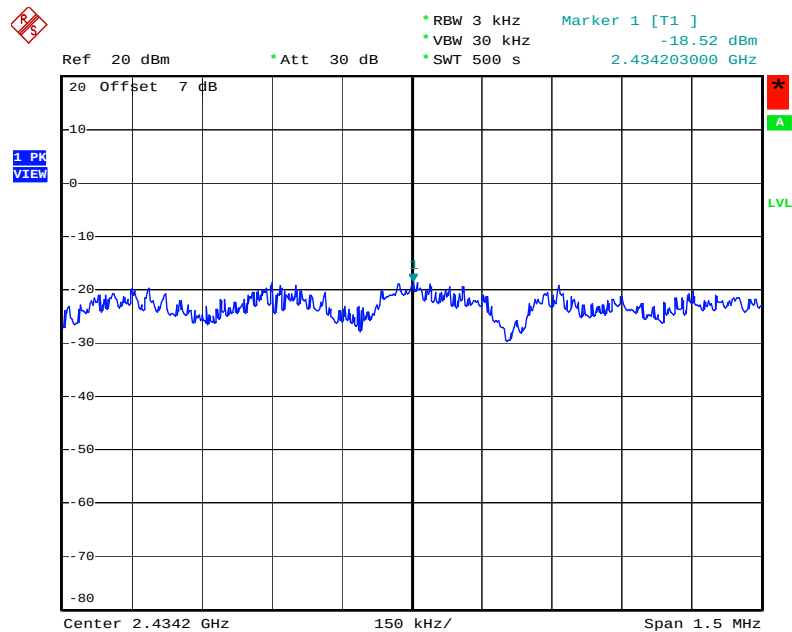


Date: 3.OCT.2006 07:46:46

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A + Ant. B / 2437 MHz

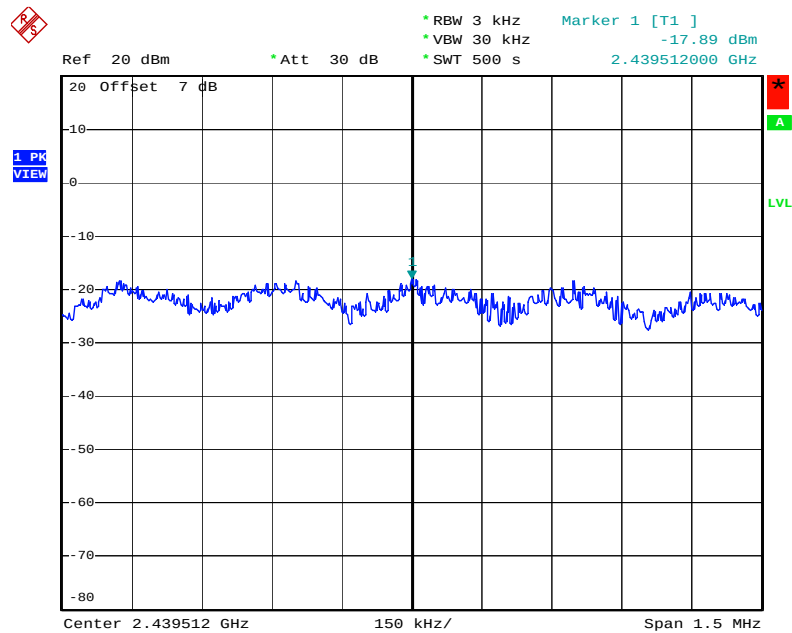

Date: 3.OCT.2006 07:47:53

Power Density Plot on Configuration IEEE 802.11g 40MHz Ant. A + Ant. B / 2452 MHz

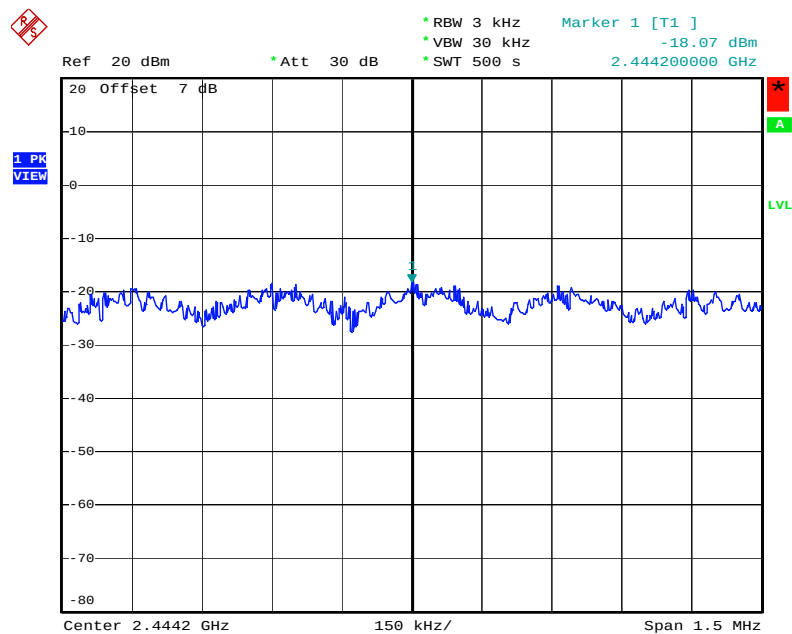

Date: 3.OCT.2006 07:51:07

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

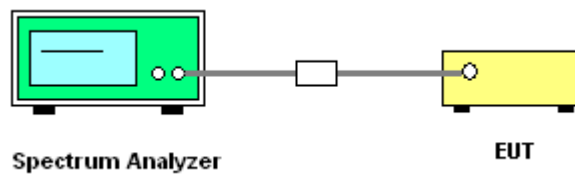

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	58%
Test Engineer	Leo Hung	Configurations	802.11b/g

Configuration IEEE 802.11b 20MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.08	13.52	500	Complies
6	2437 MHz	10.08	13.48	500	Complies
11	2462 MHz	10.08	13.48	500	Complies

Configuration IEEE 802.11b 20MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.12	13.52	500	Complies
6	2437 MHz	10.04	13.32	500	Complies
11	2462 MHz	10.08	13.52	500	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Lower

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	NA	NA	500	Complies
6	2437 MHz	10.08	13.52	500	Complies
9	2452 MHz	10.08	13.52	500	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Lower

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	NA	NA	500	Complies
6	2437 MHz	9.76	13.44	500	Complies
9	2452 MHz	10.08	13.28	500	Complies

Configuration IEEE 802.11b 40MHz Ant. A - Upper

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	10.08	13.6	500	Complies
6	2437 MHz	10	13.6	500	Complies
9	2452 MHz	NA	NA	500	Complies

Configuration IEEE 802.11b 40MHz Ant. A + Ant. B - Upper

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	9.84	13.36	500	Complies
6	2437 MHz	9.6	13.52	500	Complies
9	2452 MHz	NA	NA	500	Complies

Configuration IEEE 802.11g 20MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.56	16.52	500	Complies
6	2437 MHz	16.56	16.52	500	Complies
11	2462 MHz	16.56	16.56	500	Complies

Configuration IEEE 802.11g 20MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.56	16.68	500	Complies
6	2437 MHz	15.12	15.88	500	Complies
11	2462 MHz	12.96	15.84	500	Complies


Configuration IEEE 802.11g 40MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.32	500	Complies
6	2437 MHz	36.56	36.4	500	Complies
9	2452 MHz	36.56	36.32	500	Complies

Configuration IEEE 802.11g 40MHz Ant. A + Ant. B


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.56	36.4	500	Complies
6	2437 MHz	36.56	36.4	500	Complies
9	2452 MHz	36.48	36.48	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2412 MHz

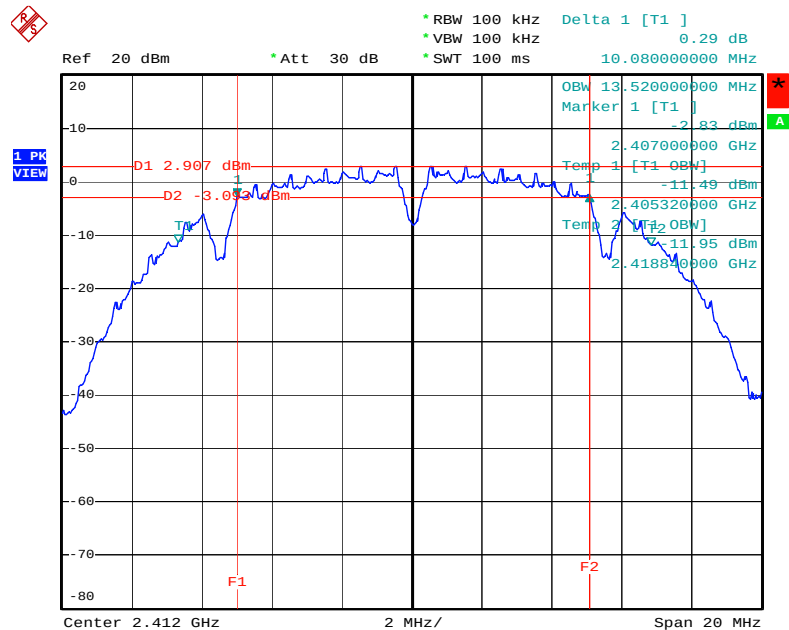


Date: 3.OCT.2006 09:02:08

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2437 MHz

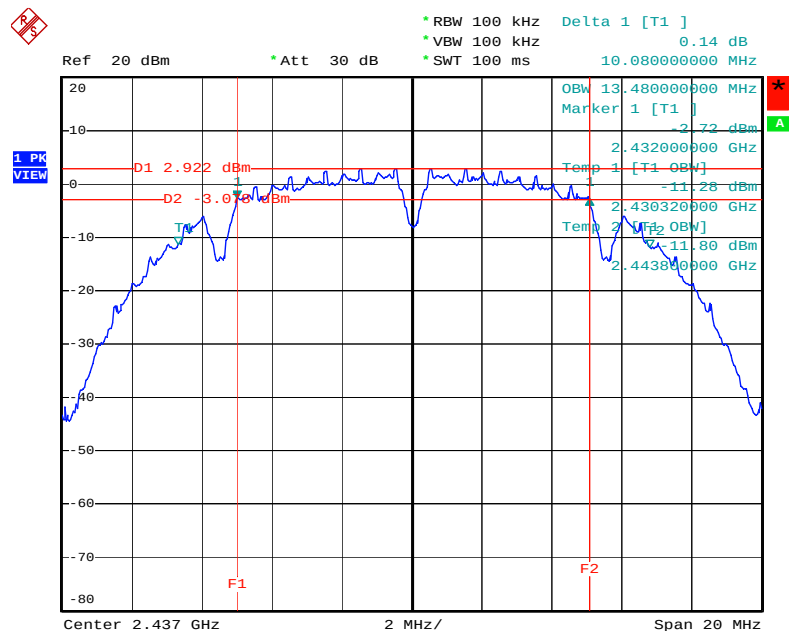


Date: 3.OCT.2006 09:03:27

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A / 2462 MHz

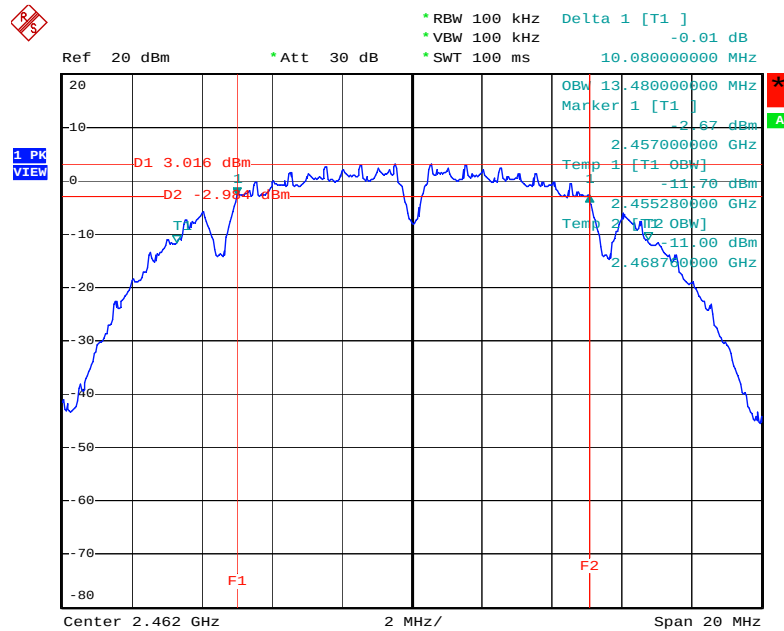


Date: 3.OCT.2006 09:04:21

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2412 MHz

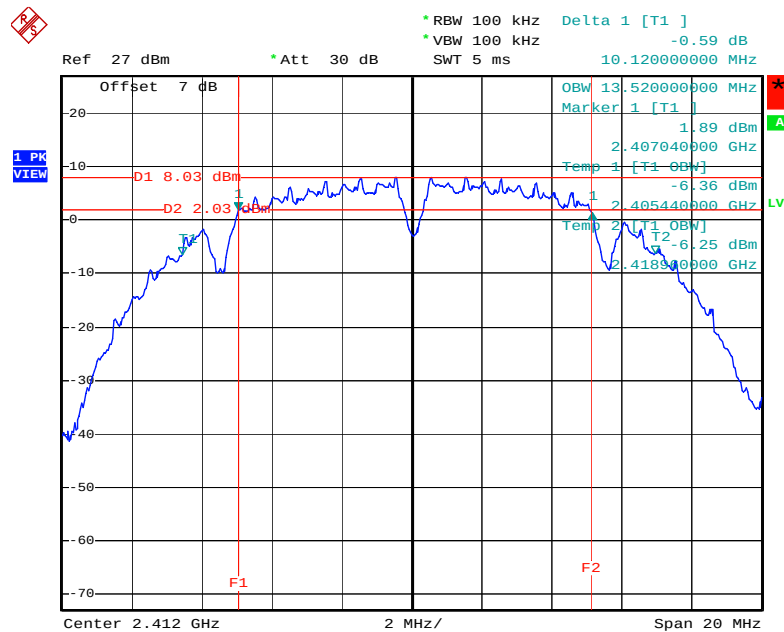


Date: 3.OCT.2006 08:34:47

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2437 MHz

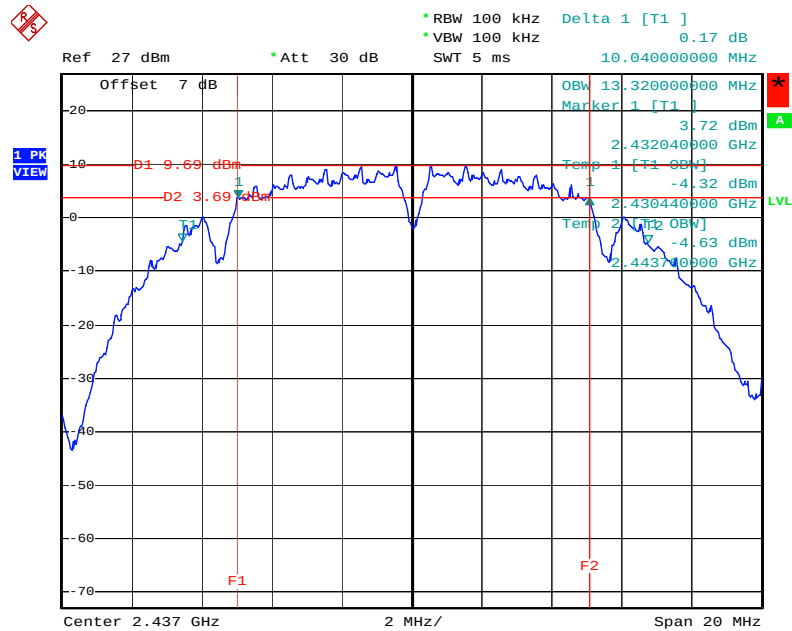


Date: 3.OCT.2006 08:42:42

6 dB Bandwidth Plot on Configuration IEEE 802.11b 20MHz Ant. A + Ant. B / 2462 MHz

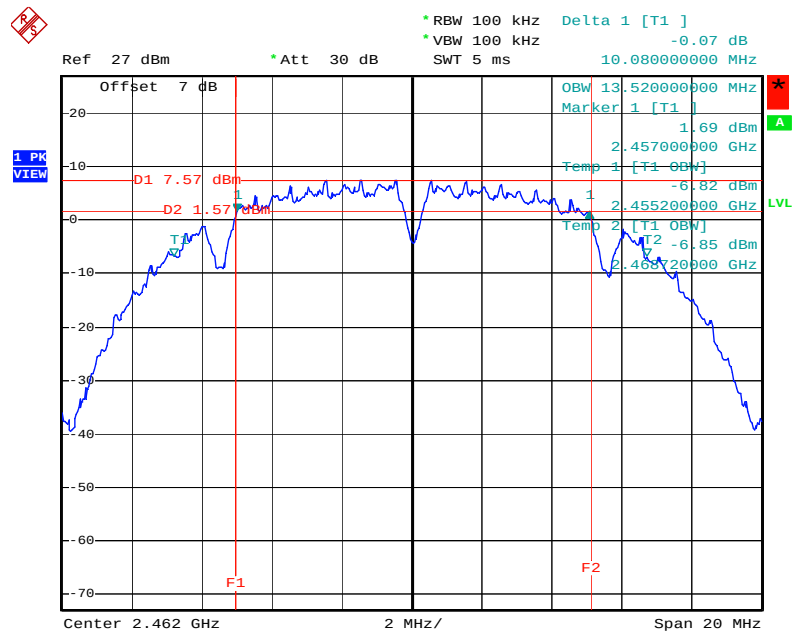


Date: 3.OCT.2006 08:54:11

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2422 MHz (Upper)

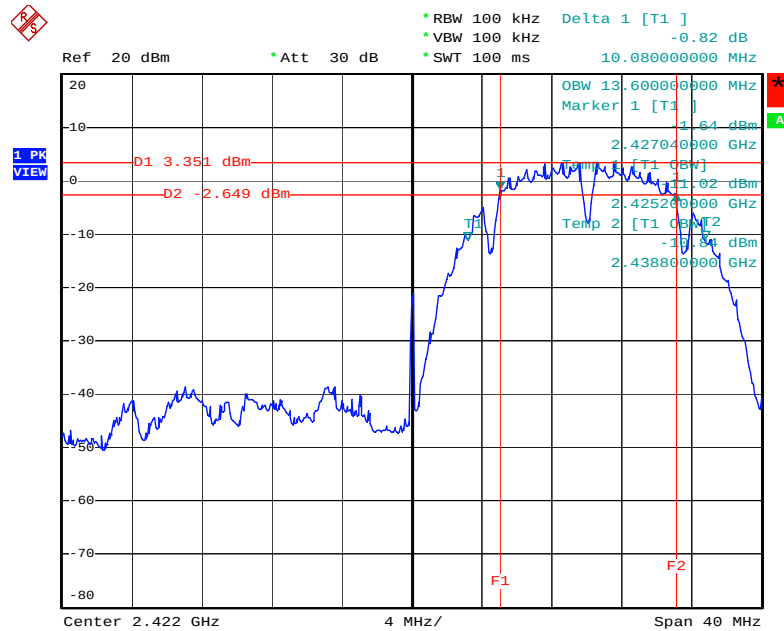


Date: 3.OCT.2006 09:35:48

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2437 MHz (Lower)

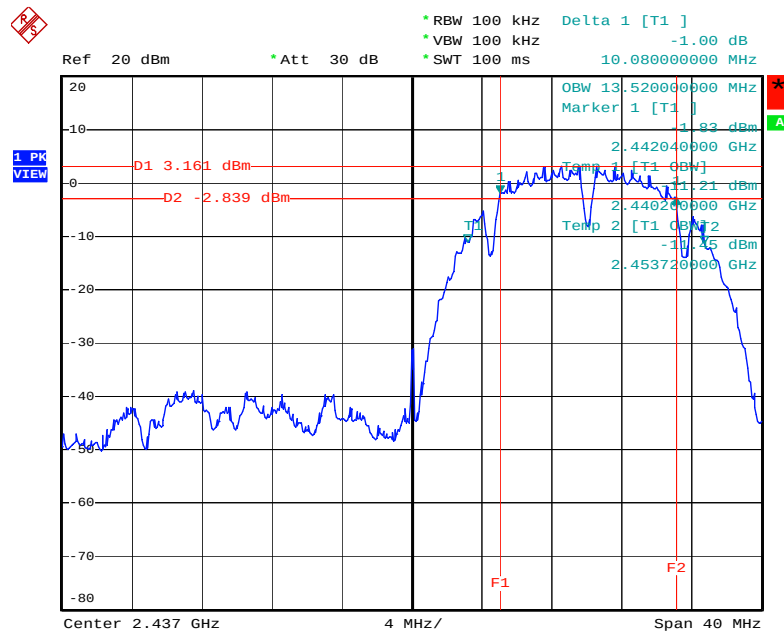


Date: 3.OCT.2006 09:37:31

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2437 MHz (Upper)

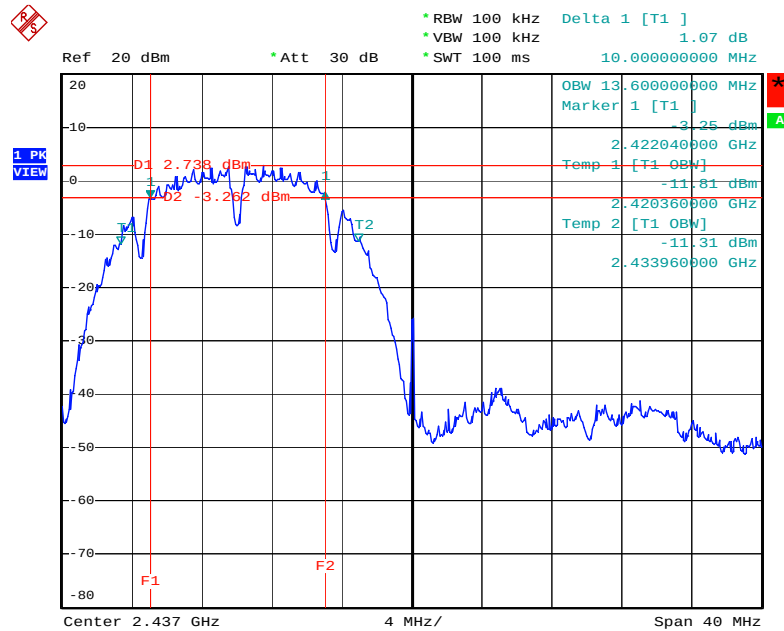


Date: 3.OCT.2006 09:42:22

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A / 2452 MHz (Lower)

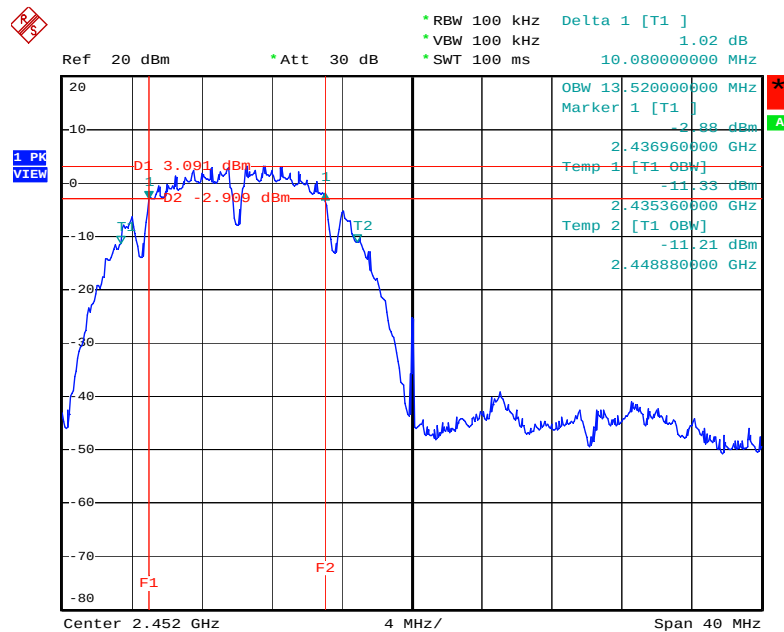


Date: 3.OCT.2006 09:38:56

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2422 MHz (Upper)

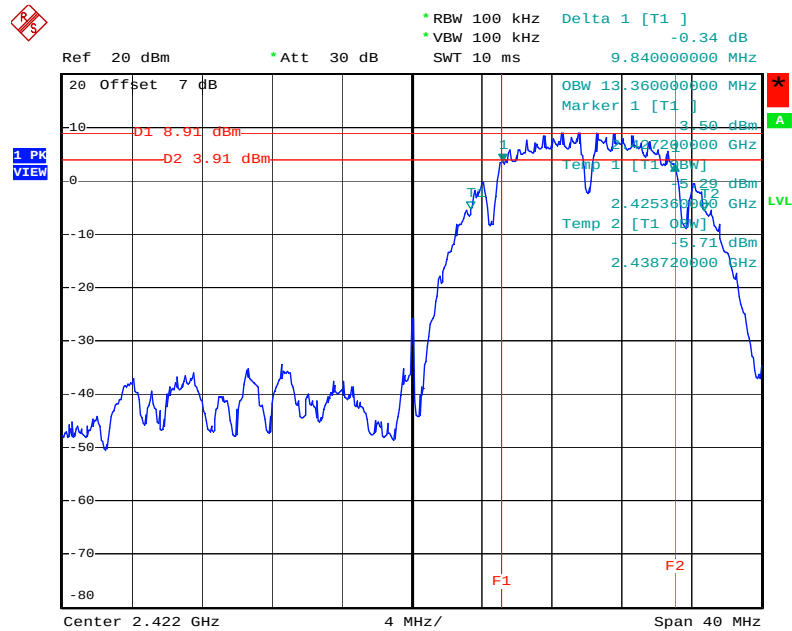


Date: 3.OCT.2006 05:54:34

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2437 MHz (Lower)

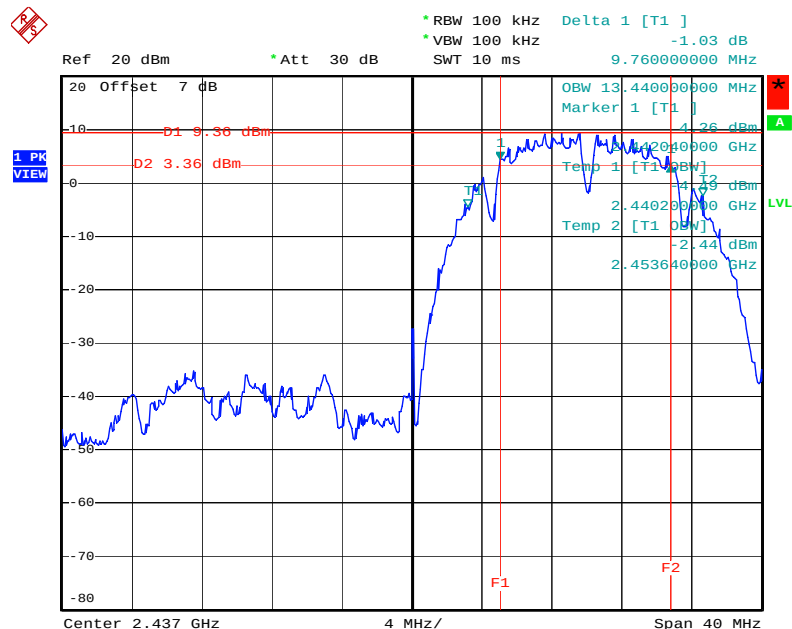


Date: 3.OCT.2006 07:32:24

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2437 MHz (Upper)

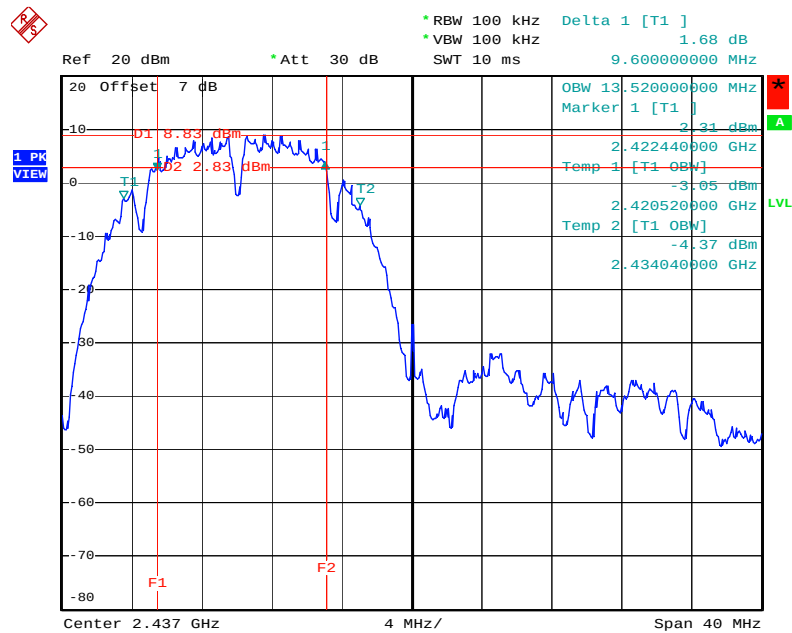


Date: 3.OCT.2006 07:36:41

6 dB Bandwidth Plot on Configuration IEEE 802.11b 40MHz Ant. A + Ant. B / 2452 MHz (Lower)

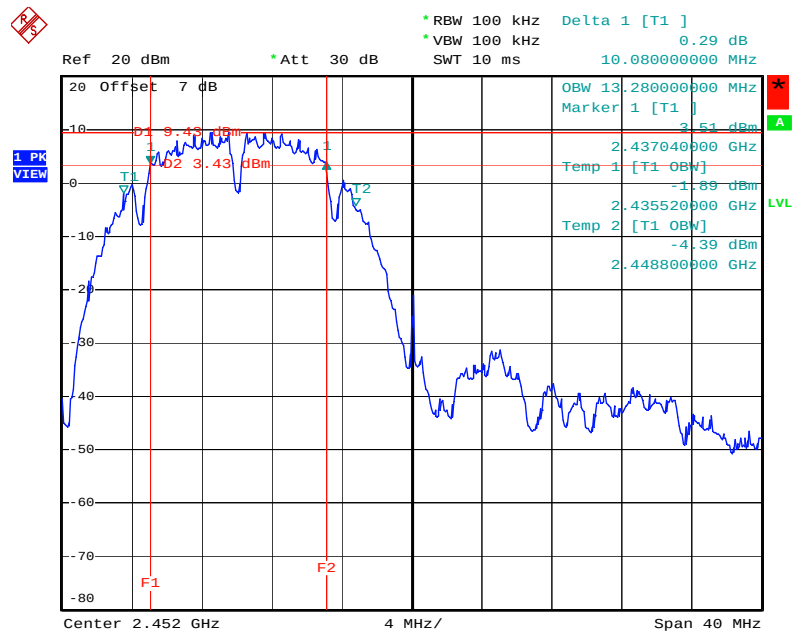


Date: 3.OCT.2006 07:37:45

6 dB Bandwidth Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2412 MHz

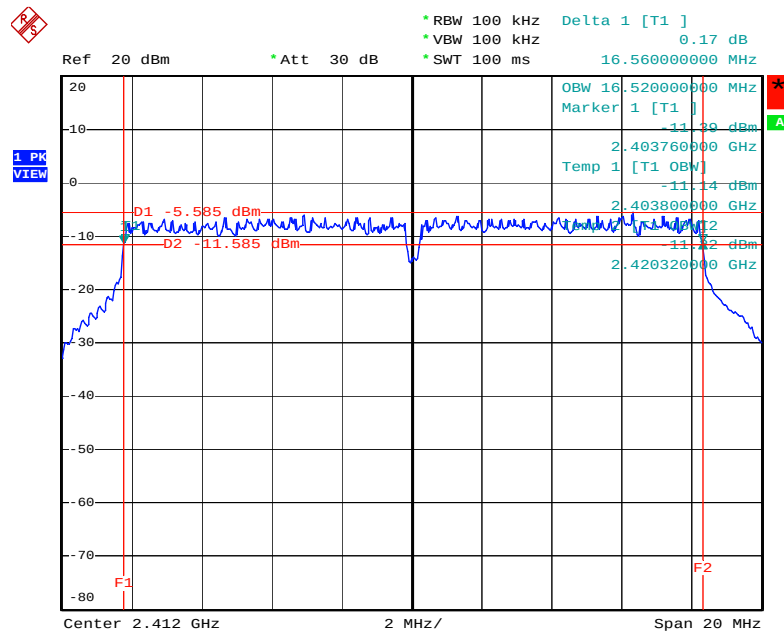


Date: 3.OCT.2006 09:07:37

6 dB Bandwidth Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2437 MHz

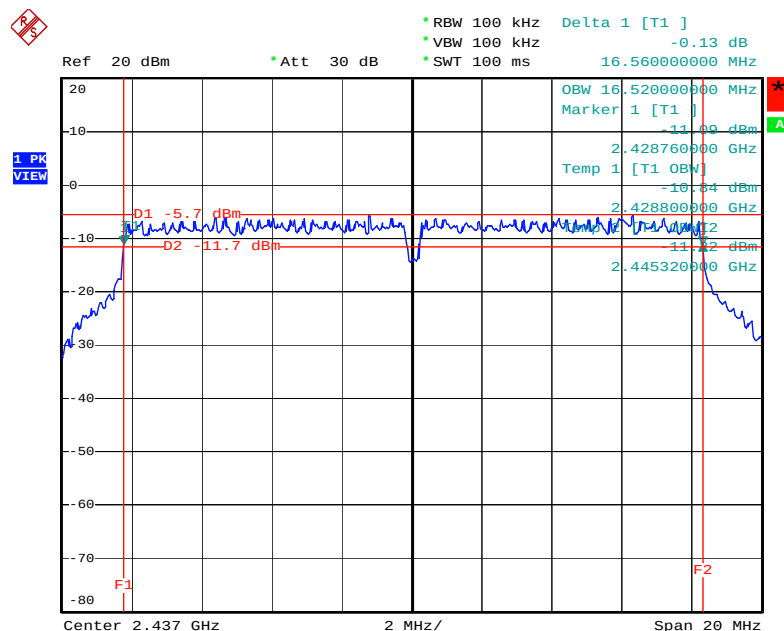


Date: 3.OCT.2006 09:09:01

6 dB Bandwidth Plot on Configuration IEEE 802.11g 20MHz Ant. A / 2462 MHz

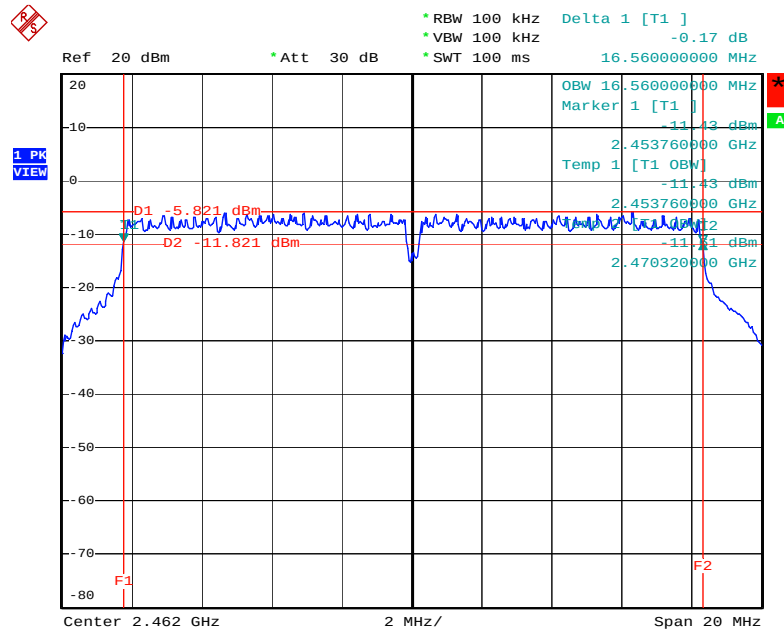

Date: 3.OCT.2006 09:09:47

6 dB Bandwidth Plot on Configuration IEEE 802.11g 20MHz Ant. A + Ant. B / 2412 MHz

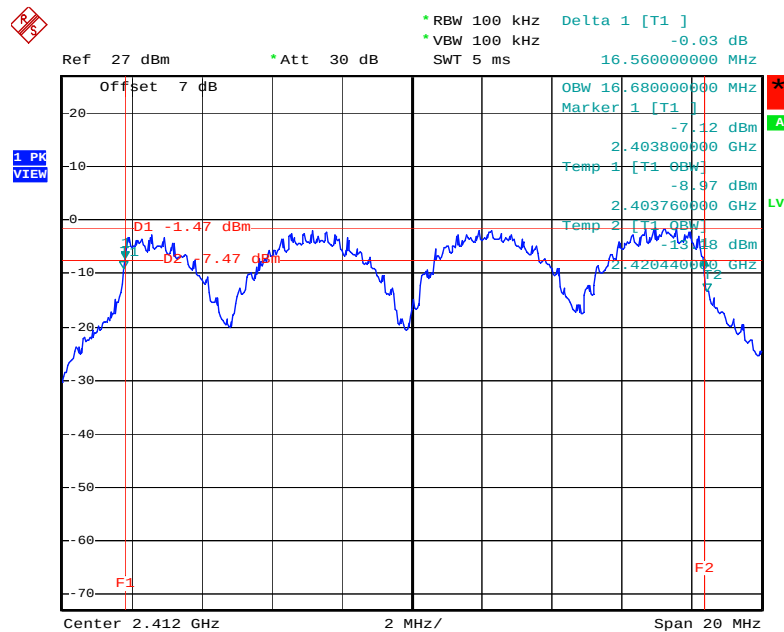

Date: 3.OCT.2006 08:25:30