


Appendix D. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	Serway Li	Configurations	Normal Link / 2.4G+5G

Horizontal

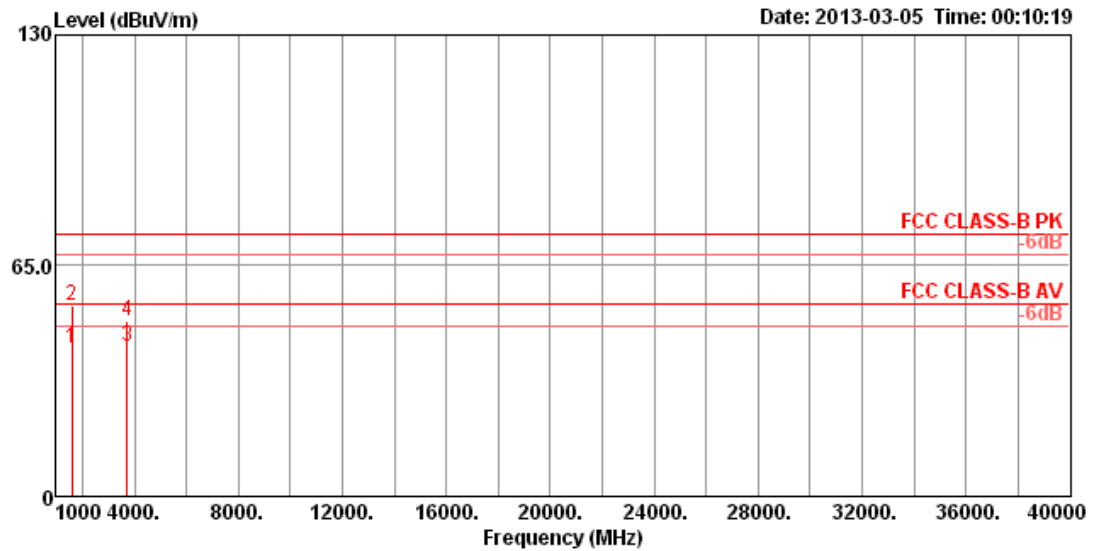

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1599.80	41.85	54.00	-12.15	50.11	2.97	25.66	36.89	100	46	HORIZONTAL	Average
2 pk	1599.92	53.76	74.00	-20.24	62.02	2.97	25.66	36.89	100	46	HORIZONTAL	Peak
3 pp	3733.22	42.10	54.00	-11.90	41.85	4.79	31.27	35.81	100	259	HORIZONTAL	Average
4	3733.58	49.48	74.00	-24.52	49.23	4.79	31.27	35.81	100	259	HORIZONTAL	Peak

Vertical

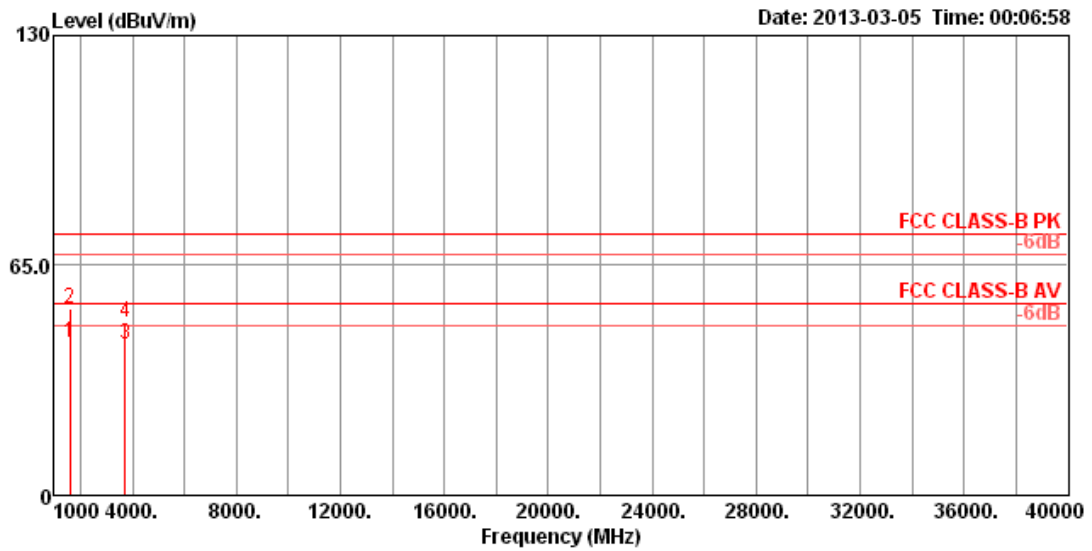

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 pp	1599.92	42.94	54.00	-11.06	51.20	2.97	25.66	36.89	100	184	VERTICAL Average
2 pk	1600.06	52.61	74.00	-21.39	60.87	2.97	25.66	36.89	100	184	VERTICAL Peak
3	3733.24	42.56	54.00	-11.44	42.31	4.79	31.27	35.81	114	47	VERTICAL Average
4	3733.28	48.81	74.00	-25.19	48.56	4.79	31.27	35.81	114	47	VERTICAL Peak