

FCC Test Report

Equipment : MiniStation Air
Brand Name : Buffalo Inc.
Model No. : HDW-PDU3
FCC ID : FDI000000021
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Buffalo Inc.
Manufacturer : Akamon-dori Bldg 30-20,Ohsu
3-chome,Naka-ku,Nagoya 460-8315,Japan

The product sample received on Dec. 05, 2013 and completely tested on Jan. 08, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	7
1.3	Support Equipment.....	7
1.4	Testing Applied Standards	7
1.5	Testing Location Information.....	7
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power.....	18
3.4	Power Spectral Density	22
3.5	Transmitter Bandedge Emissions	24
3.6	Transmitter Unwanted Emissions.....	27
4	TEST EQUIPMENT AND CALIBRATION DATA	56
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1934380MHz 41.27 (Margin 12.62dB) - AV 51.86 (Margin 12.03dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M: 9.06/ 40M: 32.56	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 17.08	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]: -10.96	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.490MHz: 27.16dB Restricted Bands [dBuV/m at 3m]: 2386.380MHz 61.72 (Margin 12.28dB) - PK 51.54 (Margin 2.46dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 455.830MHz 45.00 (Margin 1.00dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
2400-2483.5	b	2412-2462	1-11 [11]	1	16.84
2400-2483.5	g	2412-2462	1-11 [11]	1	17.08
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	14.98
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	15.08
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Chip	0.95

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☒ Production ; ☐ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 97.70% - IEEE 802.11b	0.10
☒ 86.75% - IEEE 802.11g	0.62
☒ 87.18% - IEEE 802.11n (HT20)	0.60
☒ 77.78% - IEEE 802.11n (HT40)	1.09

Note 1: RF Output Power Plots w/o Duty Factor

1.1.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	☐ System
Type of DC Source	☐ Internal DC supply	☒ External DC adapter	☐ Battery

1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	Asian Power Devices	Model Name	WA-10K05FU
	Power Rating	I/P: 100-240V~ 50-60Hz 0.3A Max ; O/P: 5V  2A		

Note: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5530	DoC

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 558074
- ♦ FCC KDB 662911

1.5 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	24°C / 51%
RF Conducted		TH06-HY	Cain	22°C / 62%
Radiated Emission		03CH03-HY	Leo	24.5°C / 48%

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth, 6dB bandwidth		±1.42 %
RF output power, conducted		±0.63 dB
Power density, conducted		±0.81 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b,1-11Mbps	1	1-11 Mbps	1 Mbps
11g,6-54Mbps	1	6-54 Mbps	6 Mbps
HT20,M0-7	1	MCS 0-7	MCS 0
HT40,M0-7	1	MCS 0-7	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software Version	Putty						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b	1	16	16	16	-	-	-
11g	1	14	14	14	-	-	-
HT-20	1	12	12	12	-	-	-
HT-40	1	-	-	-	17	17	17


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)
2	USB Power & Radio link (WLAN)
For operating mode 2 is the worst case and it was record in this test report.	


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20, HT40

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☐ EUT will be placed in fixed position.		
	☒ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Y.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode (Below 1GHz)	☒ 1. AC Power & Radio link (WLAN)		
	☒ 2. USB Power & Radio link (WLAN)		
For operating mode 2 is the worst case and it was record in this test report.			
Operating Mode (Above 1GHz)	☒ 1. AC Power & Radio link (WLAN)		
Modulation Mode	11b, 11g, HT20, HT40		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

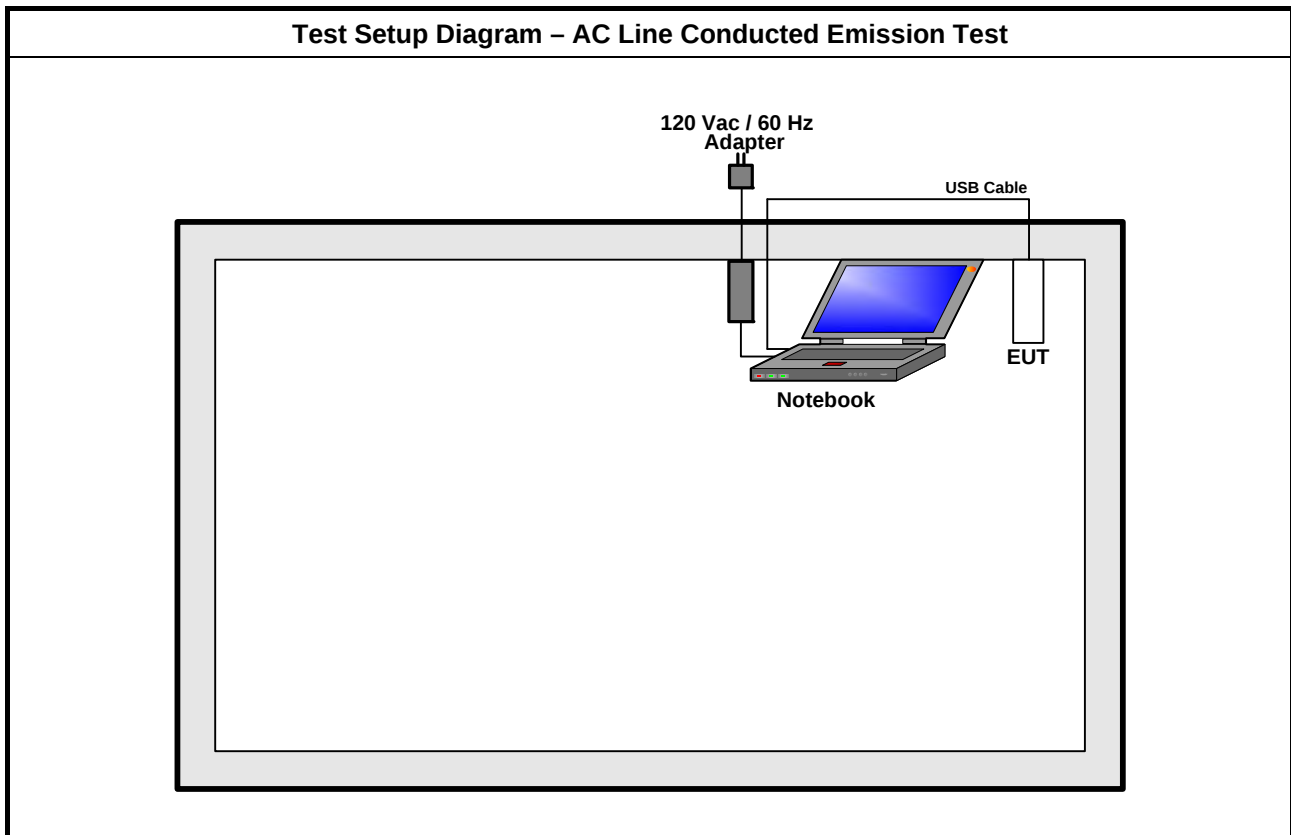

Test Setup Diagram - Radiated Test (Below 1GHz)

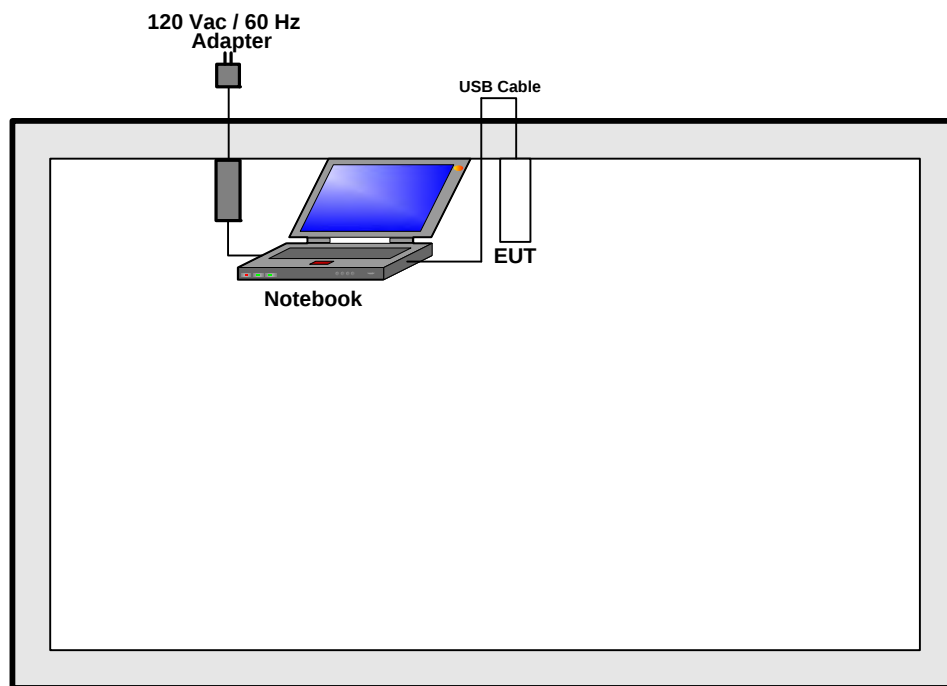

Test Setup Diagram - Radiated Test (Above 1GHz)

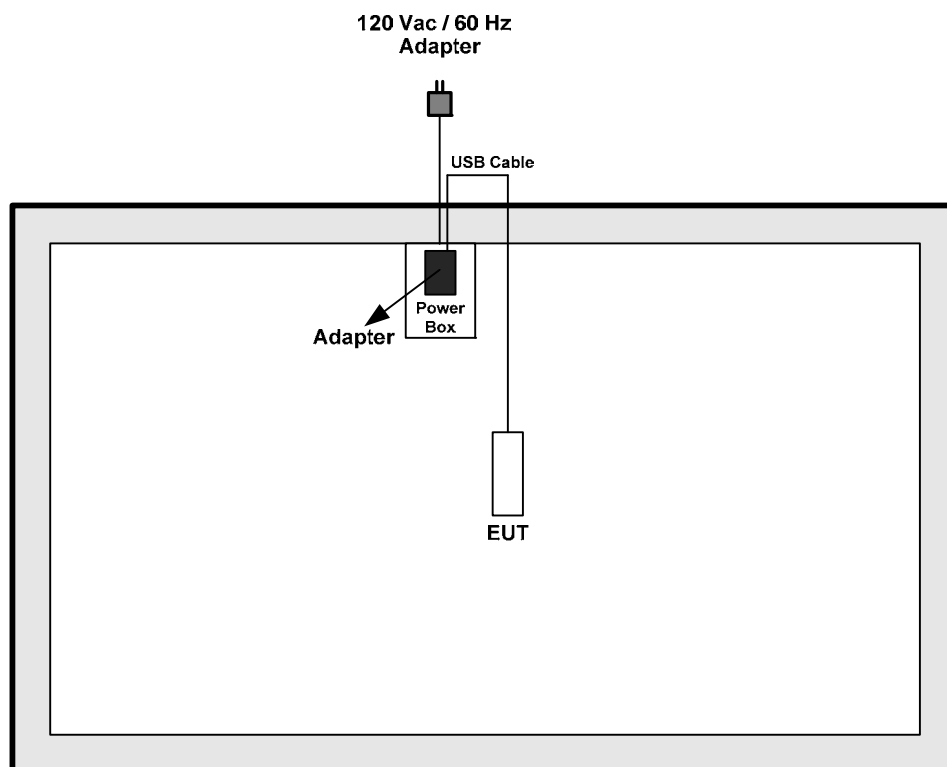

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

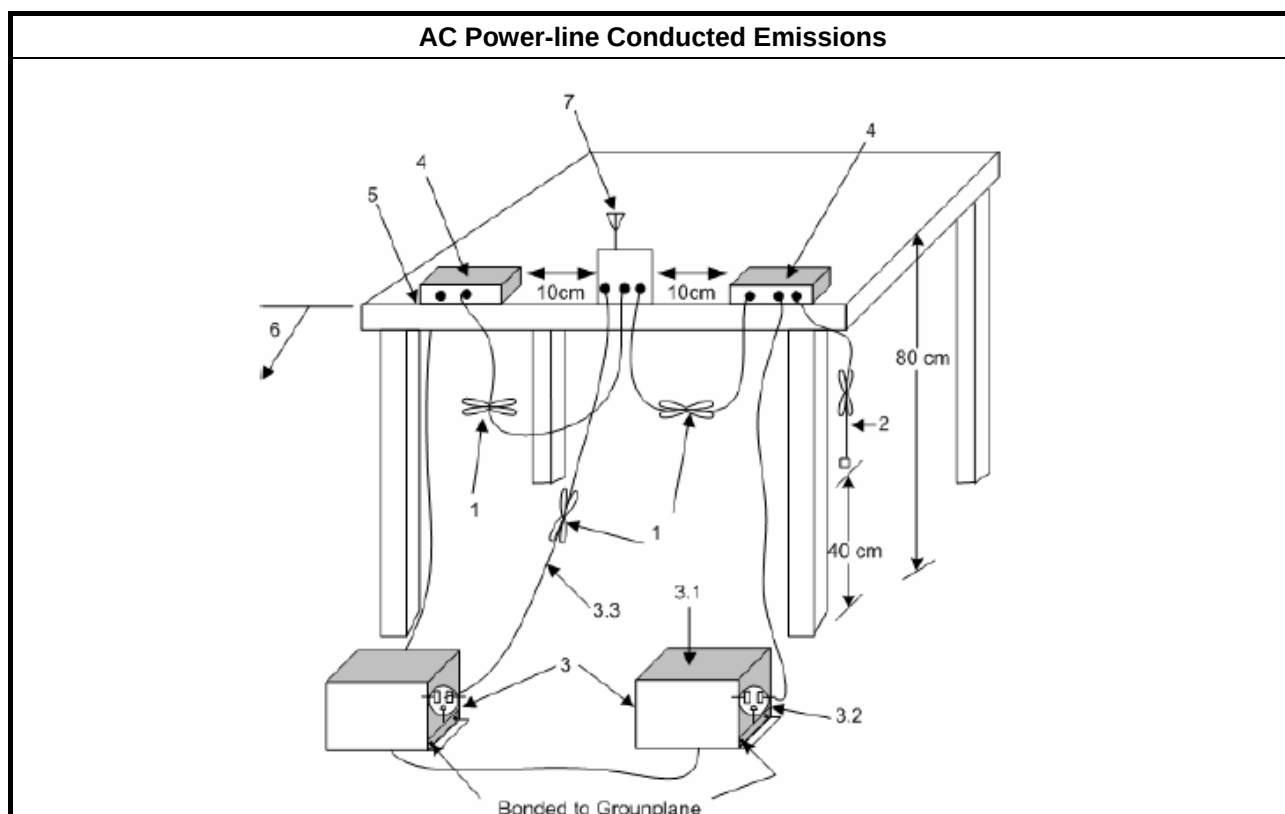


3.1.5 Test Result of AC Power-line Conducted Emissions

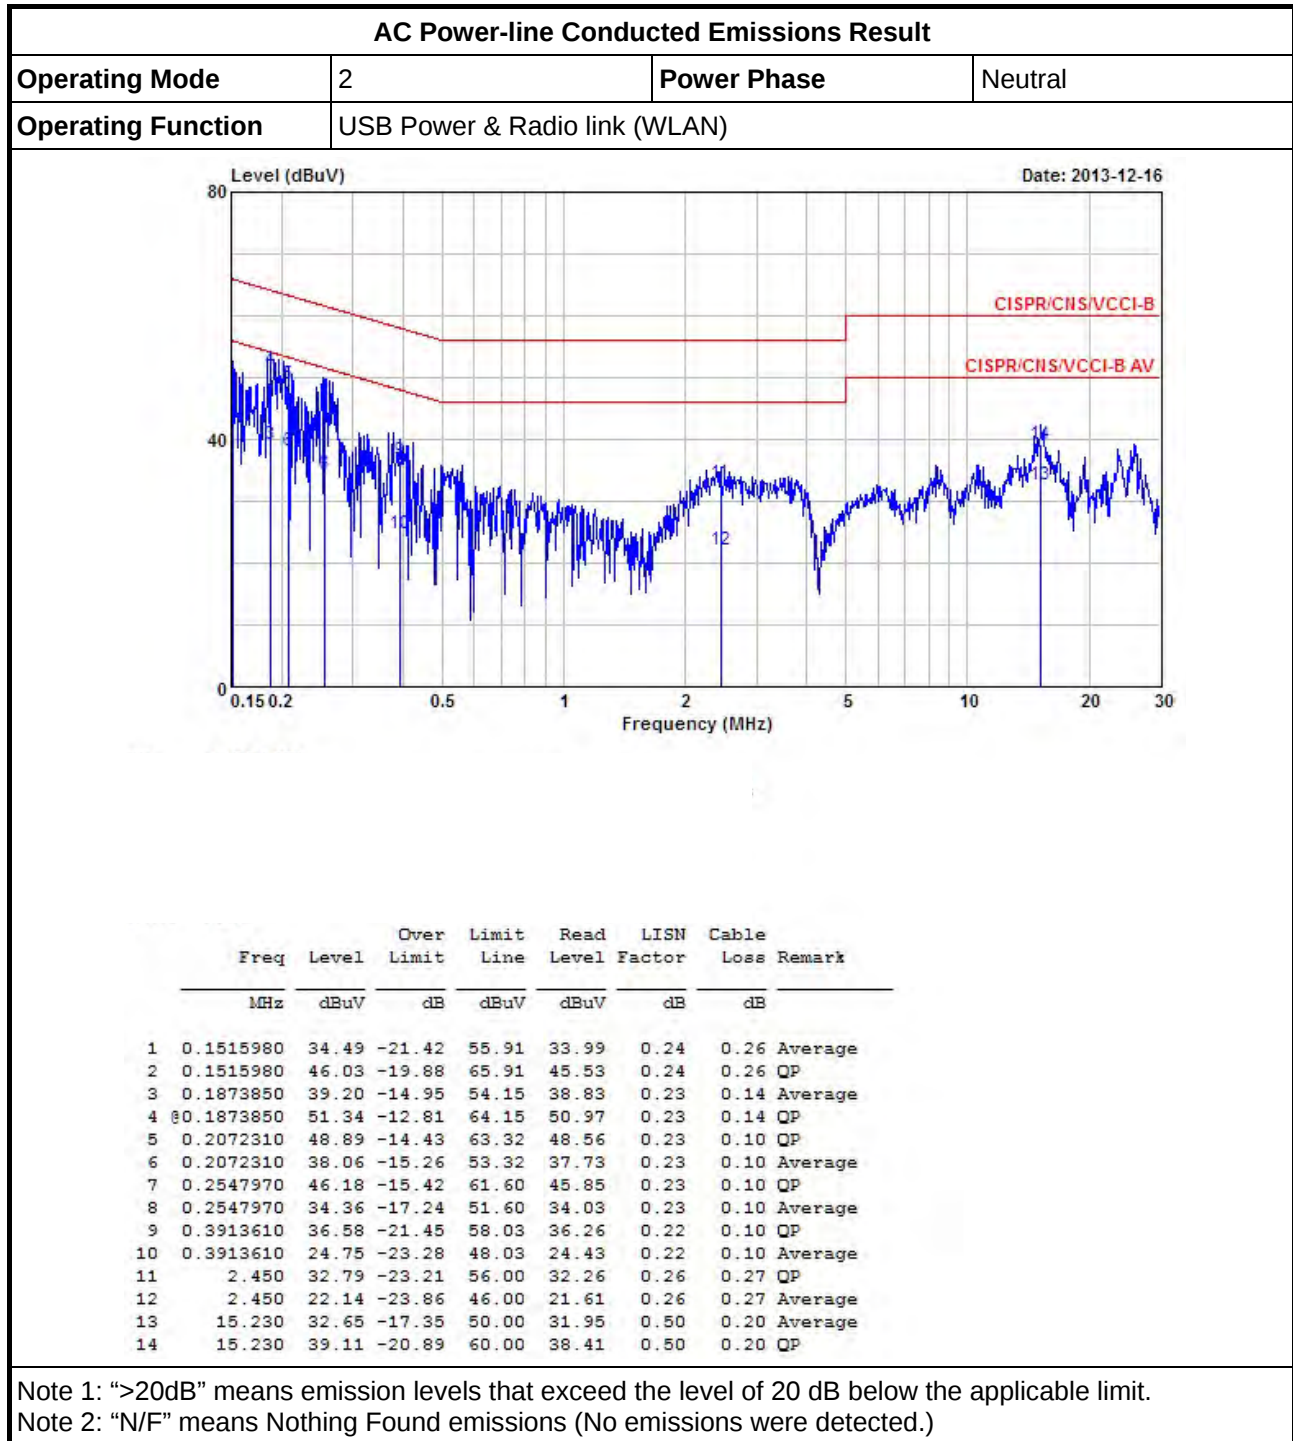

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	USB Power & Radio link (WLAN)		

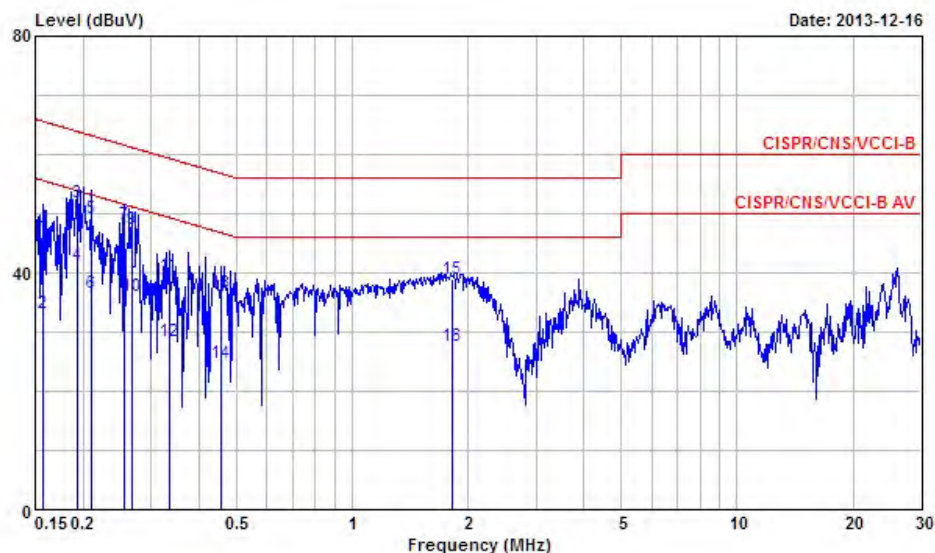

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1564950	46.16	-19.49	65.65	45.81	0.11	0.24	QP
2	0.1564950	33.16	-22.49	55.65	32.81	0.11	0.24	Average
3	0.1934380	51.86	-12.03	63.89	51.63	0.11	0.12	QP
4	0.1934380	41.27	-12.62	53.89	41.04	0.11	0.12	Average
5	0.2094380	49.29	-13.94	63.23	49.08	0.11	0.10	QP
6	0.2094380	36.53	-16.70	53.23	36.32	0.11	0.10	Average
7	0.2547970	48.13	-13.47	61.60	47.92	0.11	0.10	QP
8	0.2547970	36.74	-14.86	51.60	36.53	0.11	0.10	Average
9	0.2672410	47.34	-13.86	61.20	47.13	0.11	0.10	QP
10	0.2672410	35.95	-15.25	51.20	35.74	0.11	0.10	Average
11	0.3338470	39.43	-19.92	59.35	39.23	0.10	0.10	QP
12	0.3338470	28.30	-21.05	49.35	28.10	0.10	0.10	Average
13	0.4563600	36.70	-20.06	56.76	36.49	0.10	0.11	QP
14	0.4563600	24.75	-22.01	46.76	24.54	0.10	0.11	Average
15	1.810	38.89	-17.11	56.00	38.47	0.13	0.29	QP
16	1.810	27.74	-18.26	46.00	27.32	0.13	0.29	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
☒ 6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method		
☒ For the emission bandwidth shall be measured using one of the options below:		
☒ Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement. ☐ Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement. ☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.		
☒ For conducted measurement.		
☒ The EUT supports single transmit chain and measurements performed on this transmit chain. ☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. ☐ The EUT supports multiple transmit chains using options given below: <table border="1" data-bbox="204 1146 1439 1328"> <tbody> <tr> <td>☐ Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.</td> </tr> <tr> <td>☐ Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.</td> </tr> </tbody> </table>	☐ Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.	☐ Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.
☐ Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.		
☐ Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.		


3.2.4 Test Setup

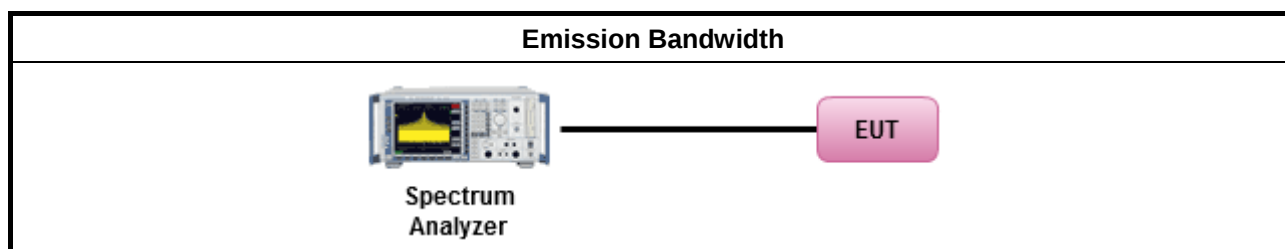

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
11b	1	2412	14.67	9.75
11b	1	2437	14.66	9.33
11b	1	2462	14.28	9.06
11g	1	2412	16.29	13.74
11g	1	2437	16.35	15.43
11g	1	2462	16.28	15.03
HT20	1	2412	17.51	16.65
HT20	1	2437	17.52	15.03
HT20	1	2462	17.30	14.64
HT40	1	2422	35.82	32.56
HT40	1	2437	35.70	34.12
HT40	1	2452	35.70	35.28
Limit			N/A	≥500 kHz
Result			Complied	

Note 1: N_{TX} = Number of Transmit Chains

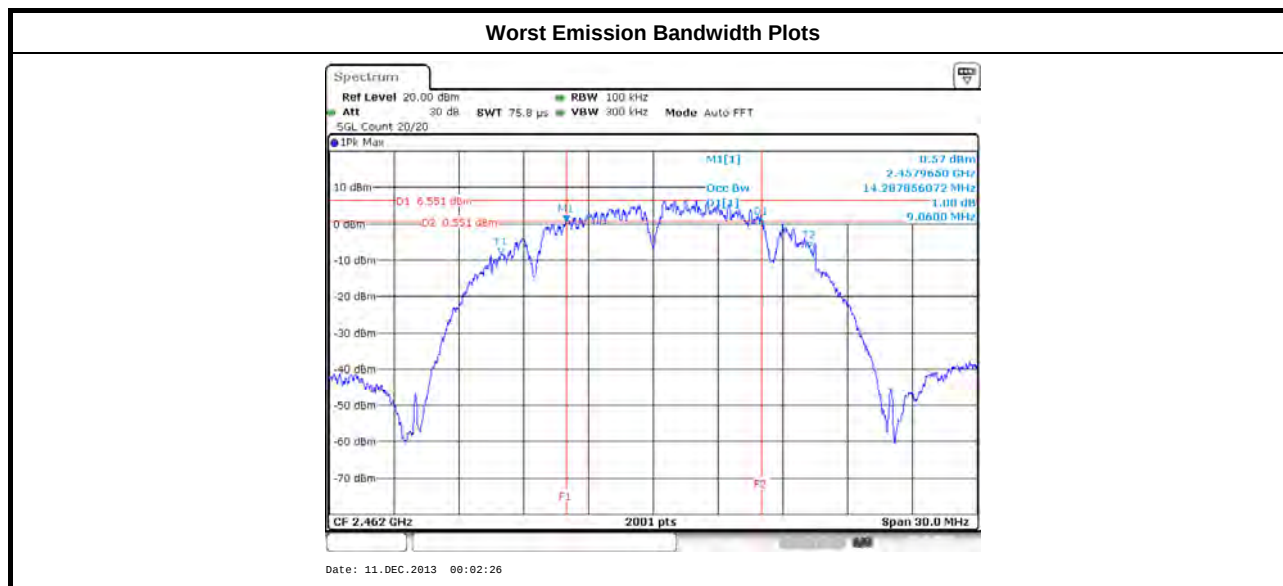

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
☒ 2400-2483.5 MHz Band:	
☒	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
☒	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
☐	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Smart antenna system (SAS):
☐	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
☒ 2400-2483.5 MHz Band	
☒	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
☐	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
☐	Smart antenna system (SAS)
☐	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Peak Conducted Output Power
☐	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
☒	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
☐	Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
☒	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
☐	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

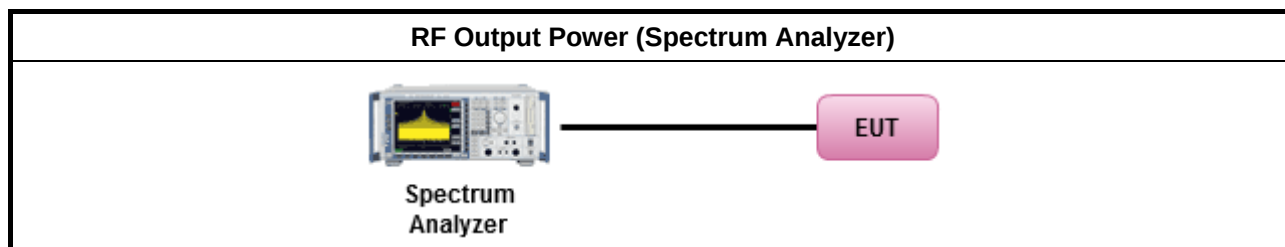

3.3.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
11b	1	2412	16.76	30.00	0.95	17.71	36.00
11b	1	2437	16.78	30.00	0.95	17.73	36.00
11b	1	2462	16.84	30.00	0.95	17.79	36.00
11g	1	2412	17.08	30.00	0.95	18.03	36.00
11g	1	2437	17.00	30.00	0.95	17.95	36.00
11g	1	2462	16.65	30.00	0.95	17.60	36.00
HT20	1	2412	14.98	30.00	0.95	15.93	36.00
HT20	1	2437	14.93	30.00	0.95	15.88	36.00
HT20	1	2462	14.75	30.00	0.95	15.70	36.00
HT40	1	2422	15.08	30.00	0.95	16.03	36.00
HT40	1	2437	14.98	30.00	0.95	15.93	36.00
HT40	1	2452	15.05	30.00	0.95	16.00	36.00
Result			Complied				

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
11b	1	2412	13.89	30.00	0.95	14.84	36.00
11b	1	2437	13.85	30.00	0.95	14.80	36.00
11b	1	2462	13.95	30.00	0.95	14.90	36.00
11g	1	2412	12.47	30.00	0.95	13.42	36.00
11g	1	2437	12.50	30.00	0.95	13.45	36.00
11g	1	2462	11.72	30.00	0.95	12.67	36.00
HT20	1	2412	10.04	30.00	0.95	10.99	36.00
HT20	1	2437	9.98	30.00	0.95	10.93	36.00
HT20	1	2462	9.84	30.00	0.95	10.79	36.00
HT40	1	2422	10.20	30.00	0.95	11.15	36.00
HT40	1	2437	10.10	30.00	0.95	11.05	36.00
HT40	1	2452	10.27	30.00	0.95	11.22	36.00
Result			Complied				



2400-2483.5MHz - Worst RF Output Power Plots

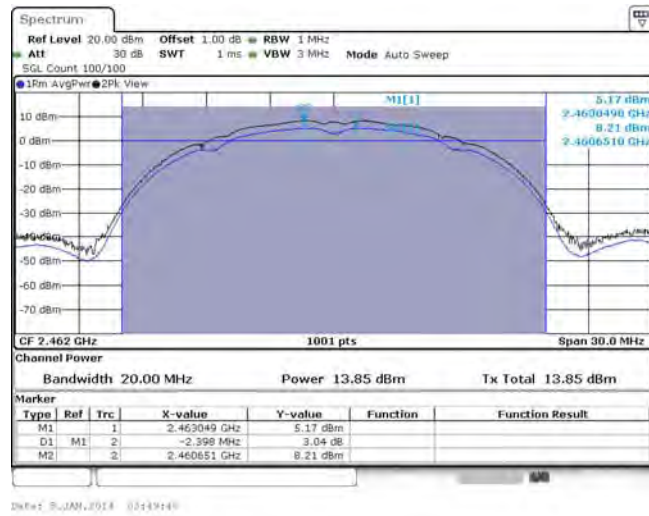

Note 1: RF Output Power Plots w/o Duty Factor

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
☒	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle $\geq$ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 10.3 Method AVGPS-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.4 Method AVGPS-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 558074, clause 10.5 Method AVGPS-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.6 Method AVGPS-2 Alt. (slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

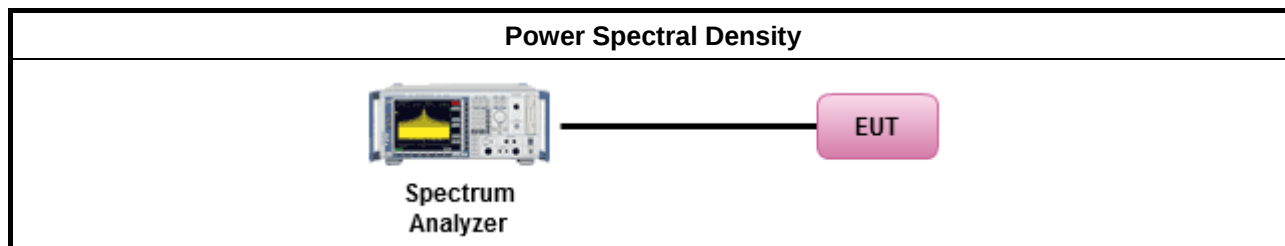


3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density	
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain (dBm/100kHz)	PSD Limit (dBm/3kHz)
11b	1	2412	-10.96	8
11b	1	2437	-11.27	8
11b	1	2462	-12.30	8
11g	1	2412	-15.10	8
11g	1	2437	-16.72	8
11g	1	2462	-16.85	8
HT20	1	2412	-18.99	8
HT20	1	2437	-17.46	8
HT20	1	2462	-18.87	8
HT40	1	2422	-20.93	8
HT40	1	2437	-21.27	8
HT40	1	2452	-20.37	8
Result			Complied	

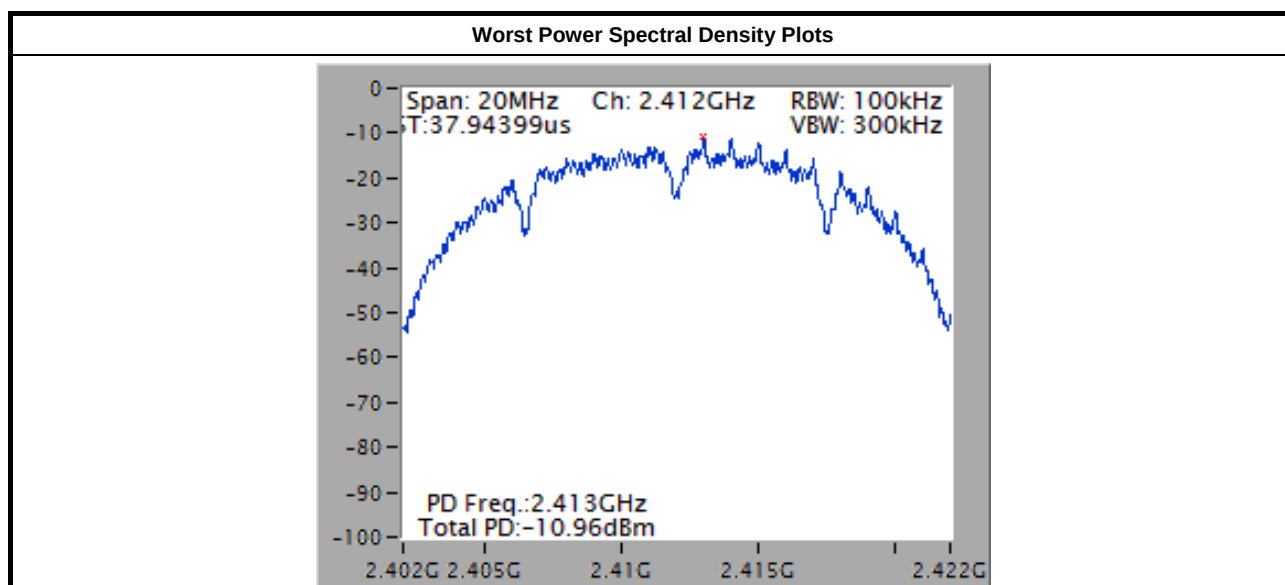

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

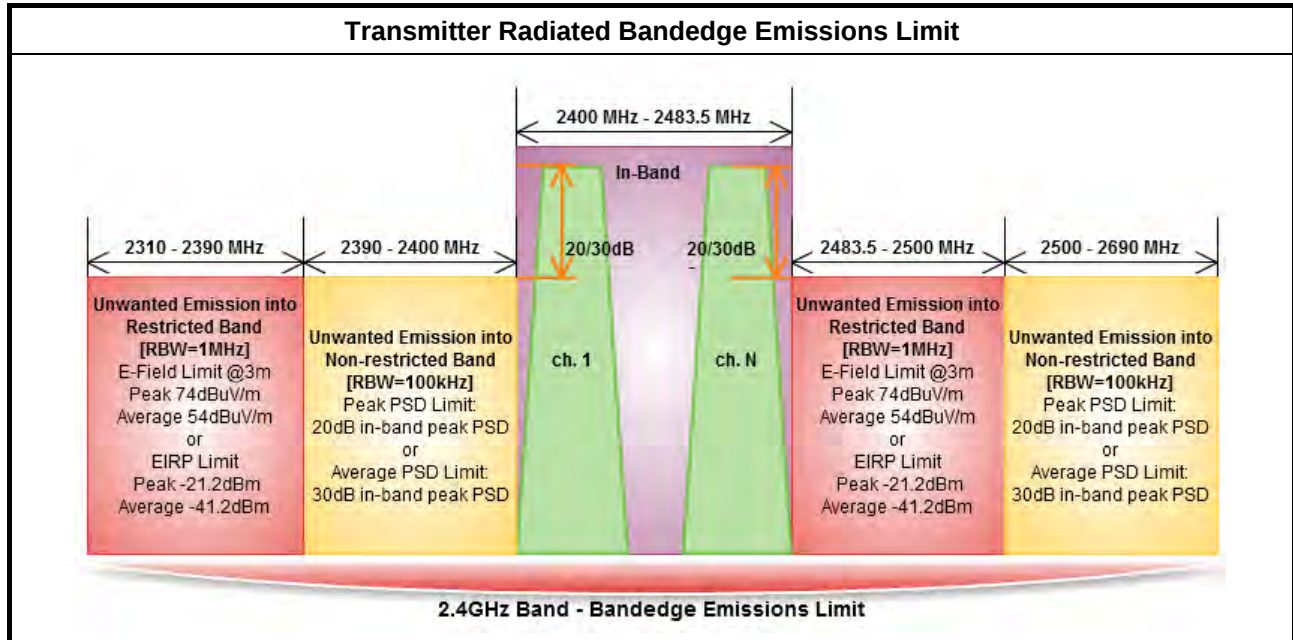


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☐	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.

3.5.4 Test Setup

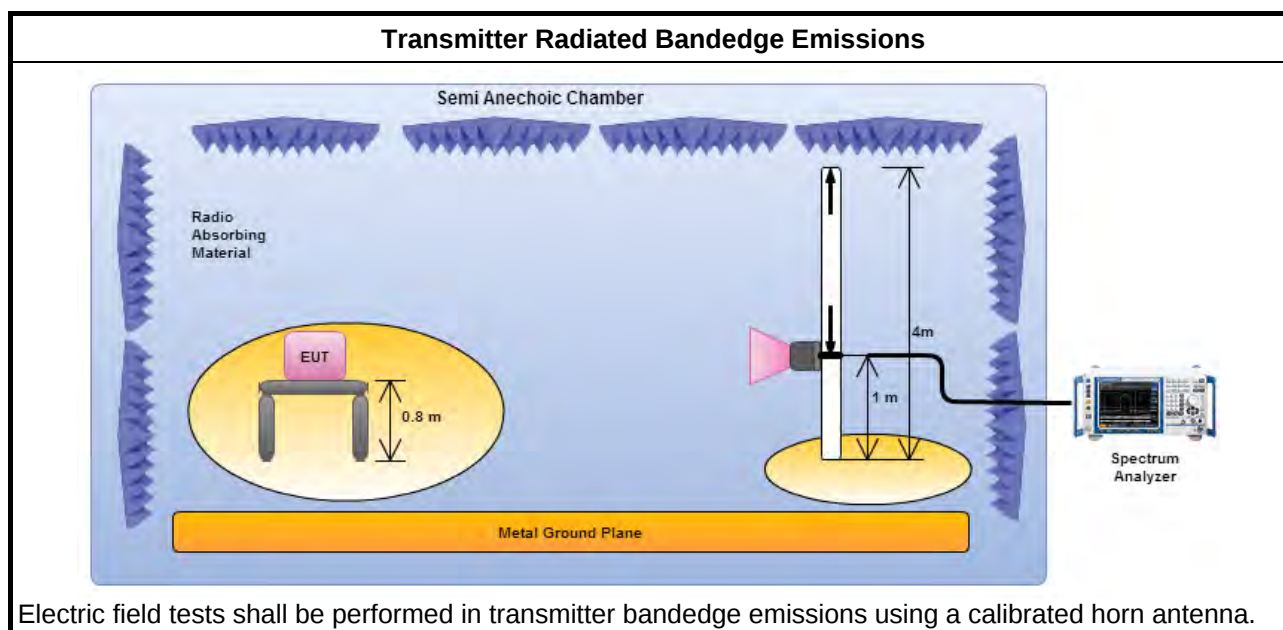

3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	105.61	2393.550	61.41	44.20	20	H
11b	1	2462	104.48	2513.100	59.97	44.51	20	H
11g	1	2412	98.09	2399.490	70.93	27.16	20	H
11g	1	2462	96.65	2539.900	59.12	37.53	20	H
HT20,M0-7	1	2412	95.73	2400.000	65.81	29.92	20	H
HT20,M0-7	1	2462	94.34	2507.000	60.43	33.91	20	H
HT40,M0-7	1	2422	92.58	2400.000	61.46	31.12	20	H
HT40,M0-7	1	2452	92.27	2534.120	60.07	32.20	20	H
Note 1: Measurement worst emissions of receive antenna polarization								

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2385.940	61.72	74	2386.380	51.54	54	H
11b	1	2462	3	2488.200	60.52	74	2488.600	48.26	54	H
11g	1	2412	3	2389.630	72.22	74	2389.970	49.22	54	H
11g	1	2462	3	2483.800	69.49	74	2483.500	47.47	54	H
HT20,M0-7	1	2412	3	2390.000	68.31	74	2390.000	46.63	54	H
HT20,M0-7	1	2462	3	2483.900	67.99	74	2483.500	46.05	54	H
HT40,M0-7	1	2422	3	2387.350	70.77	74	2390.000	46.07	54	H
HT40,M0-7	1	2452	3	2484.200	68.43	74	2483.500	46.08	54	H
Note 1: Measurement worst emissions of receive antenna polarization.										

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☐	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
☒	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

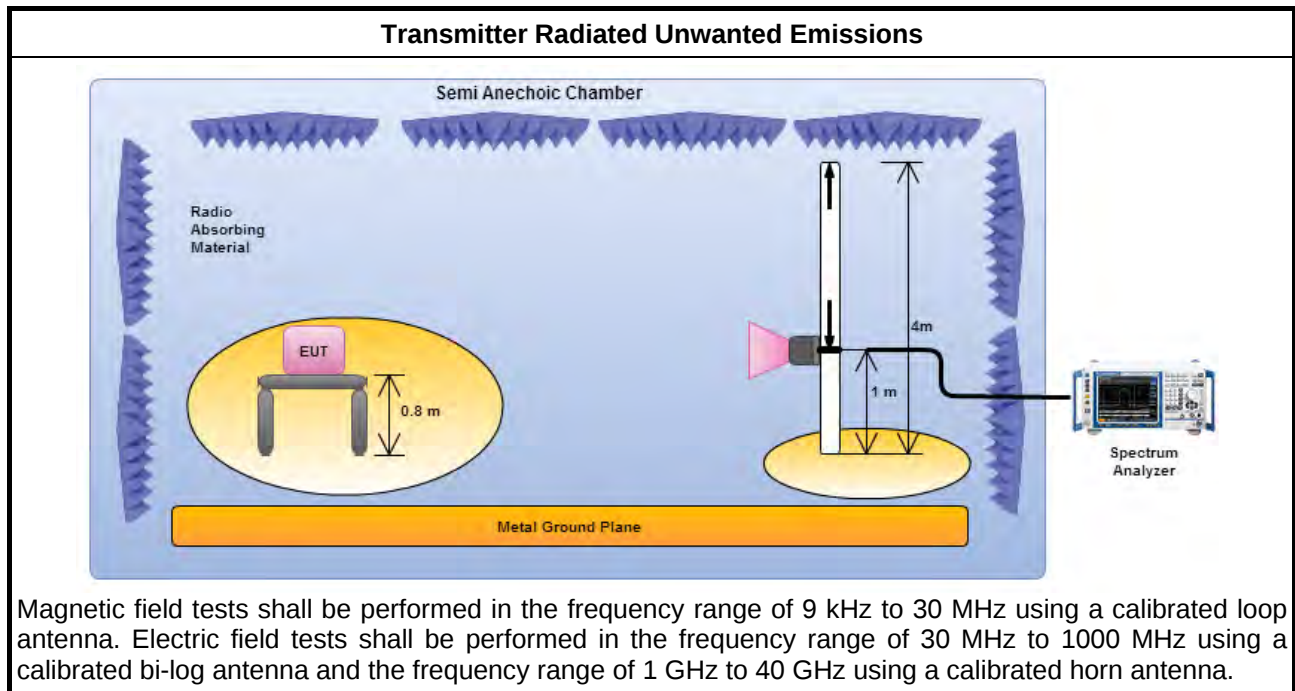

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

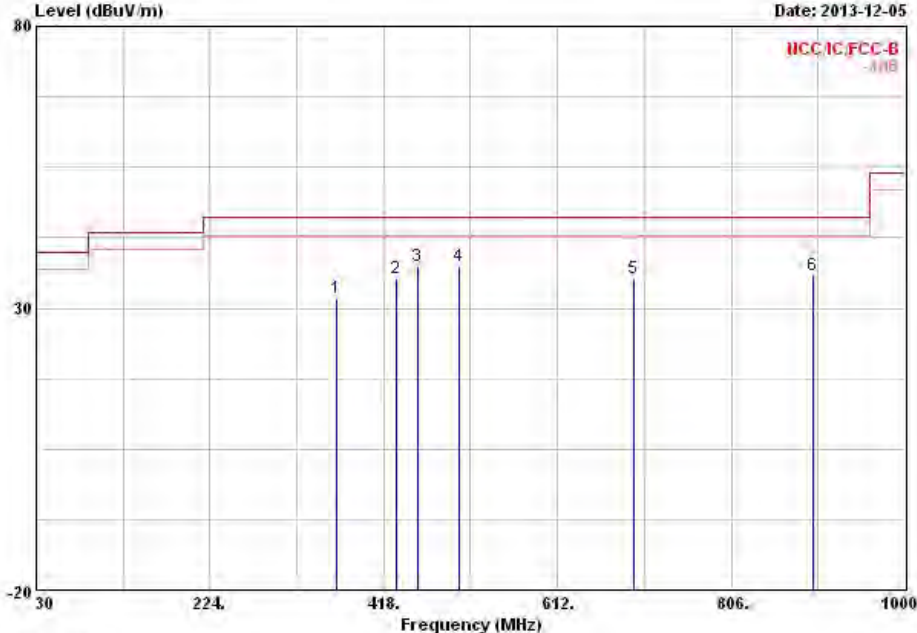Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																																										
Modulation Mode		11g				Test Freq. (MHz)		2437																																																																																																		
N _{TX}		1				Polarization		V																																																																																																		
Level (dBuV/m)  Date: 2013-12-05 NCC/C.FCC-B -1/10 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Remark</th><th>Rnt Pos</th><th>Table Pos</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>365.620</td><td>31.68</td><td>-14.32</td><td>46.00</td><td>40.87</td><td>14.72</td><td>3.19</td><td>27.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>431.580</td><td>35.32</td><td>-10.68</td><td>46.00</td><td>43.07</td><td>16.32</td><td>3.44</td><td>27.51</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>455.830</td><td>37.58</td><td>-8.42</td><td>46.00</td><td>45.06</td><td>16.63</td><td>3.53</td><td>27.64</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>502.390</td><td>37.43</td><td>-8.57</td><td>46.00</td><td>44.37</td><td>17.15</td><td>3.79</td><td>27.88</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>696.390</td><td>35.17</td><td>-10.83</td><td>46.00</td><td>39.80</td><td>18.77</td><td>4.54</td><td>27.94</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>897.180</td><td>35.91</td><td>-10.09</td><td>46.00</td><td>37.81</td><td>20.49</td><td>5.17</td><td>27.56</td><td>Peak</td><td>---</td><td>---</td></tr></table>												Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	1	365.620	31.68	-14.32	46.00	40.87	14.72	3.19	27.10	Peak	---	---	2	431.580	35.32	-10.68	46.00	43.07	16.32	3.44	27.51	Peak	---	---	3	455.830	37.58	-8.42	46.00	45.06	16.63	3.53	27.64	Peak	---	---	4	502.390	37.43	-8.57	46.00	44.37	17.15	3.79	27.88	Peak	---	---	5	696.390	35.17	-10.83	46.00	39.80	18.77	4.54	27.94	Peak	---	---	6	897.180	35.91	-10.09	46.00	37.81	20.49	5.17	27.56	Peak	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg																																																																																															
1	365.620	31.68	-14.32	46.00	40.87	14.72	3.19	27.10	Peak	---	---																																																																																															
2	431.580	35.32	-10.68	46.00	43.07	16.32	3.44	27.51	Peak	---	---																																																																																															
3	455.830	37.58	-8.42	46.00	45.06	16.63	3.53	27.64	Peak	---	---																																																																																															
4	502.390	37.43	-8.57	46.00	44.37	17.15	3.79	27.88	Peak	---	---																																																																																															
5	696.390	35.17	-10.83	46.00	39.80	18.77	4.54	27.94	Peak	---	---																																																																																															
6	897.180	35.91	-10.09	46.00	37.81	20.49	5.17	27.56	Peak	---	---																																																																																															
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																																																										


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	H

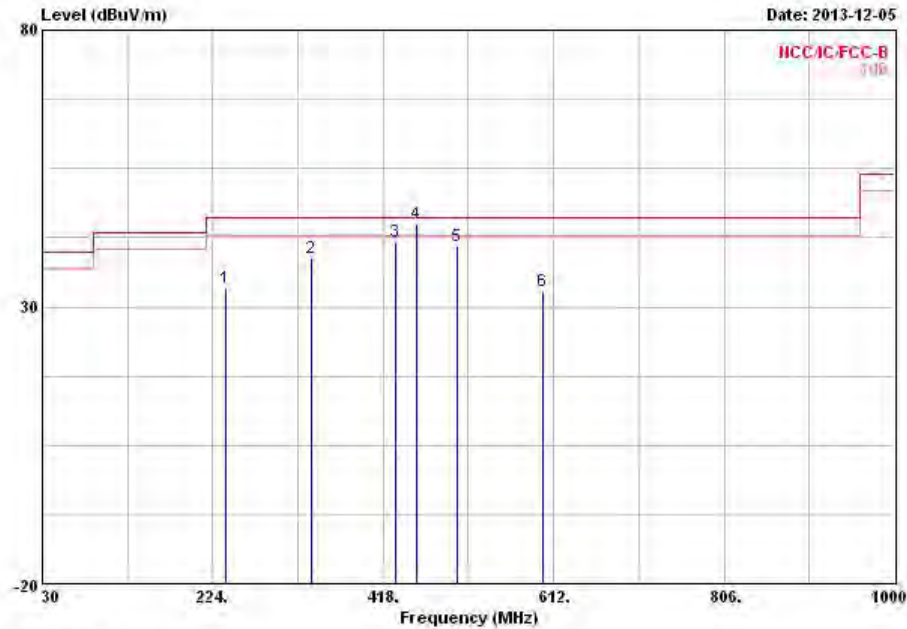


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	238.550	33.42	-12.58	46.00	46.14	11.60	2.55	26.87	Peak	---	---
2	335.550	38.71	-7.29	46.00	48.67	13.87	3.06	26.89	Peak	---	---
3	431.580	41.82	-4.18	46.00	49.57	16.32	3.44	27.51	Peak	---	---
4	455.830	45.00	-1.00	46.00	52.48	16.63	3.53	27.64	OP	---	---
5	502.390	41.11	-4.89	46.00	48.05	17.15	3.79	27.88	Peak	---	---
6	599.390	32.78	-13.22	46.00	38.18	18.44	4.15	27.99	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

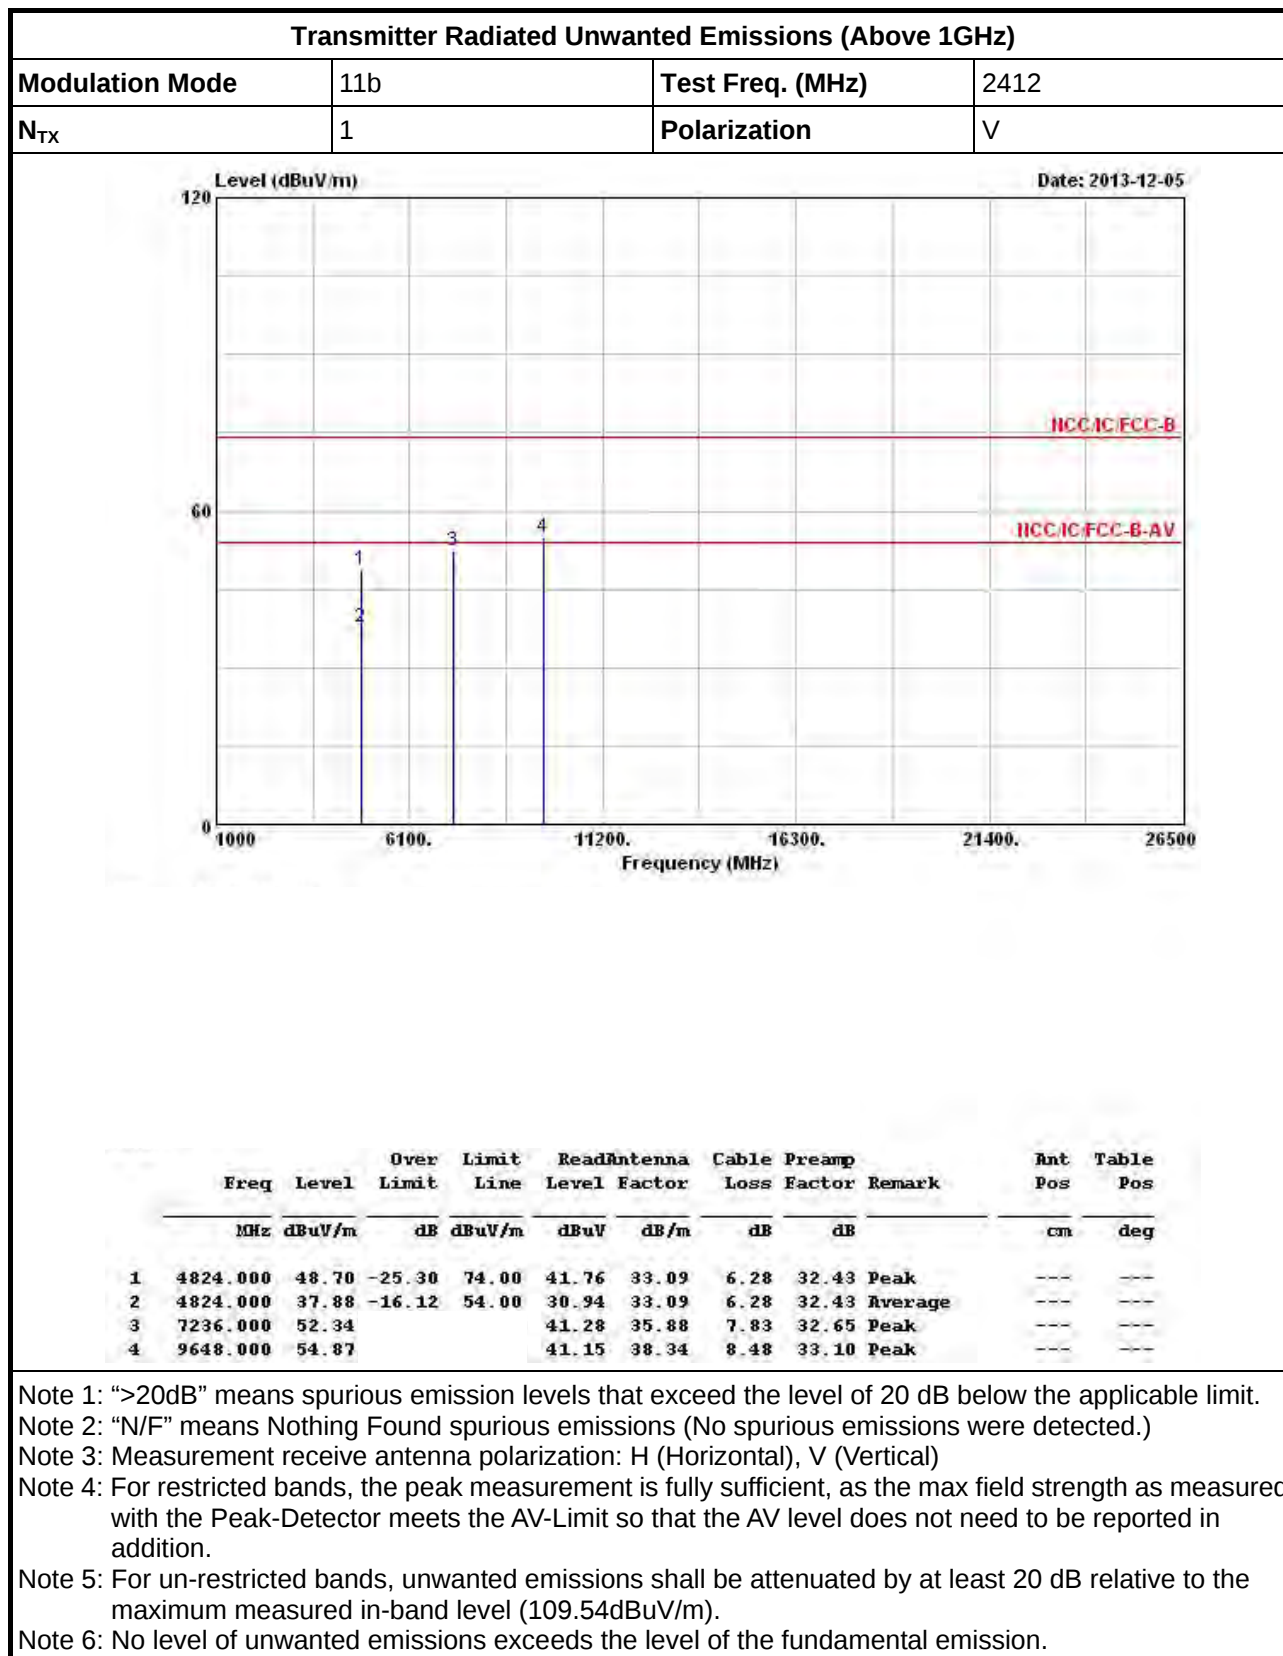3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 2400-2483.5MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

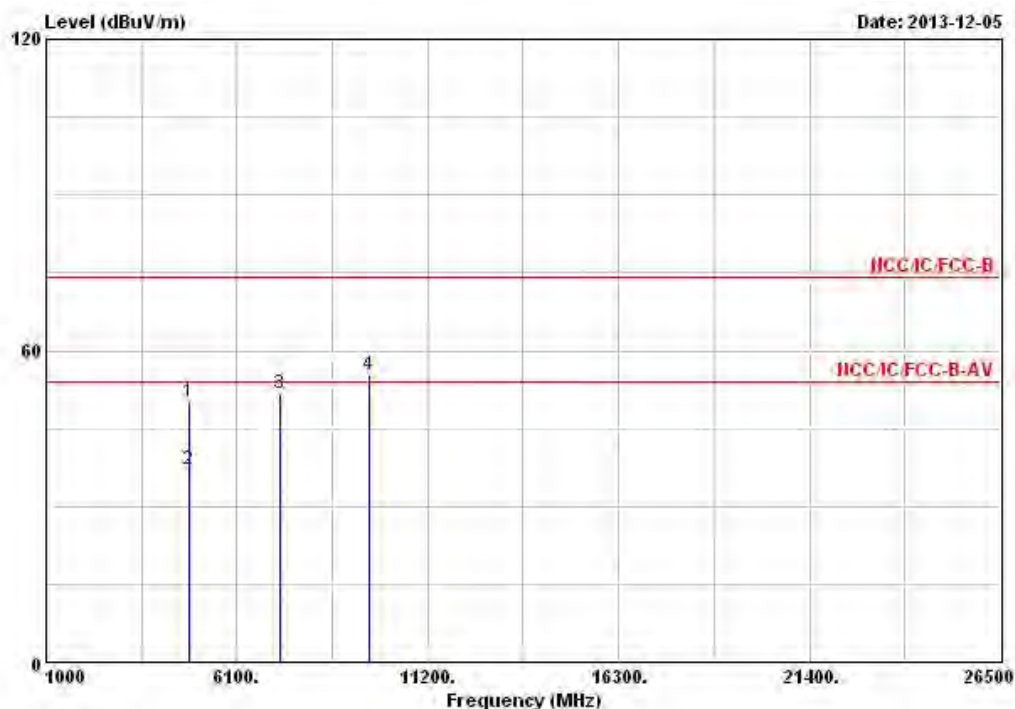

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	50.12	-23.88	74.00	43.18	33.09	6.28	32.43	Peak	---	---
2	4824.000	37.19	-16.81	54.00	30.25	33.09	6.28	32.43	Average	---	---
3	7236.000	51.74			40.68	35.88	7.83	32.65	Peak	---	---
4	9648.000	55.17			41.45	38.34	8.48	33.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.54 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

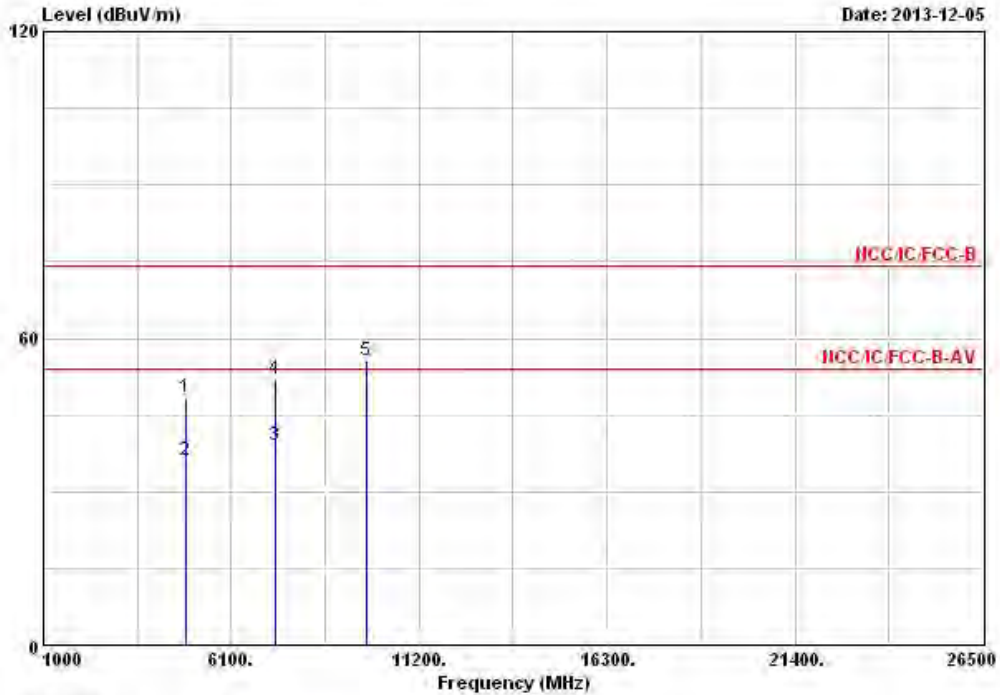

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	48.59	-25.41	74.00	41.51	33.18	6.32	32.42	Peak	---	---
2	4874.000	36.05	-17.95	54.00	28.97	33.18	6.32	32.42	Average	---	---
3	7311.000	39.07	-14.93	54.00	27.82	36.04	7.87	32.66	Average	---	---
4	7311.000	52.19	-21.81	74.00	40.94	36.04	7.87	32.66	Peak	---	---
5	9748.000	55.49			41.56	38.57	8.44	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (108.39 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	H

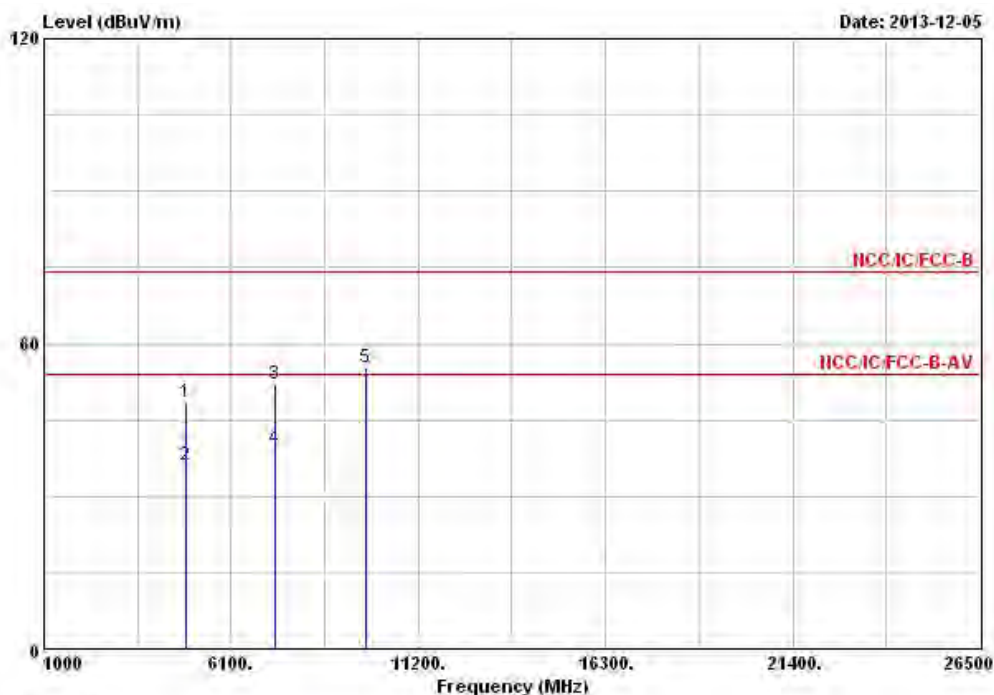

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	48.54	-25.46	74.00	41.46	33.18	6.32	32.42	Peak	---	---
2	4874.000	35.94	-18.06	54.00	28.86	33.18	6.32	32.42	Average	---	---
3	7311.000	51.89	-22.11	74.00	40.64	36.04	7.87	32.66	Peak	---	---
4	7311.000	39.21	-14.79	54.00	27.96	36.04	7.87	32.66	Average	---	---
5	9748.000	55.33			41.40	38.57	8.44	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (108.39 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	V

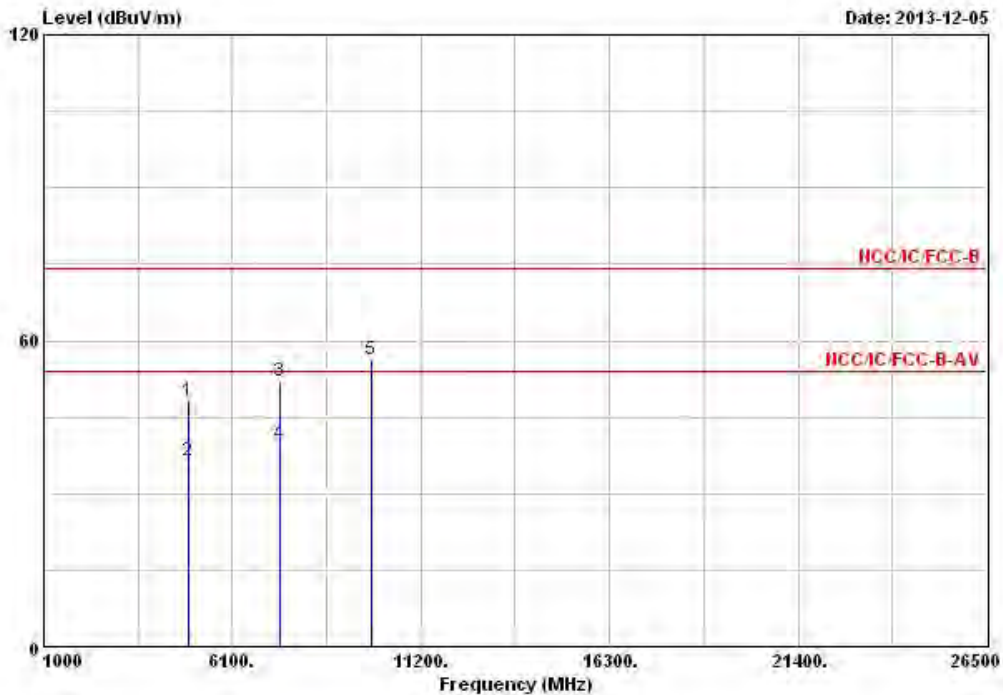

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	48.16	-25.84	74.00	40.89	33.28	6.40	32.41	Peak	---	---
2	4924.000	36.29	-17.71	54.00	29.02	33.28	6.40	32.41	Average	---	---
3	7386.000	51.89	-22.11	74.00	40.42	36.25	7.91	32.69	Peak	---	---
4	7386.000	39.67	-14.33	54.00	28.20	36.25	7.91	32.69	Average	---	---
5	9848.000	56.14			42.09	38.76	8.37	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (108.17 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	H

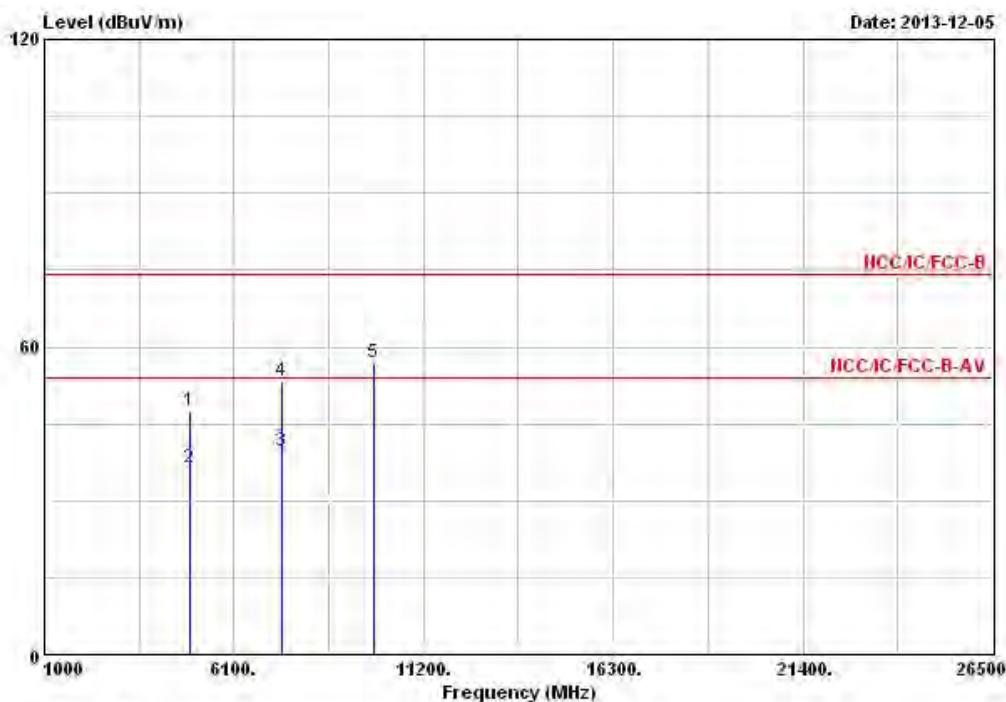

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	47.51	-26.49	74.00	40.24	33.28	6.40	32.41	Peak	---	---
2	4924.000	36.57	-17.43	54.00	29.30	33.28	6.40	32.41	Average	---	---
3	7386.000	39.54	-14.46	54.00	28.07	36.25	7.91	32.69	Average	---	---
4	7386.000	53.45	-20.55	74.00	41.98	36.25	7.91	32.69	Peak	---	---
5	9848.000	56.78			42.73	38.76	8.37	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (108.17 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

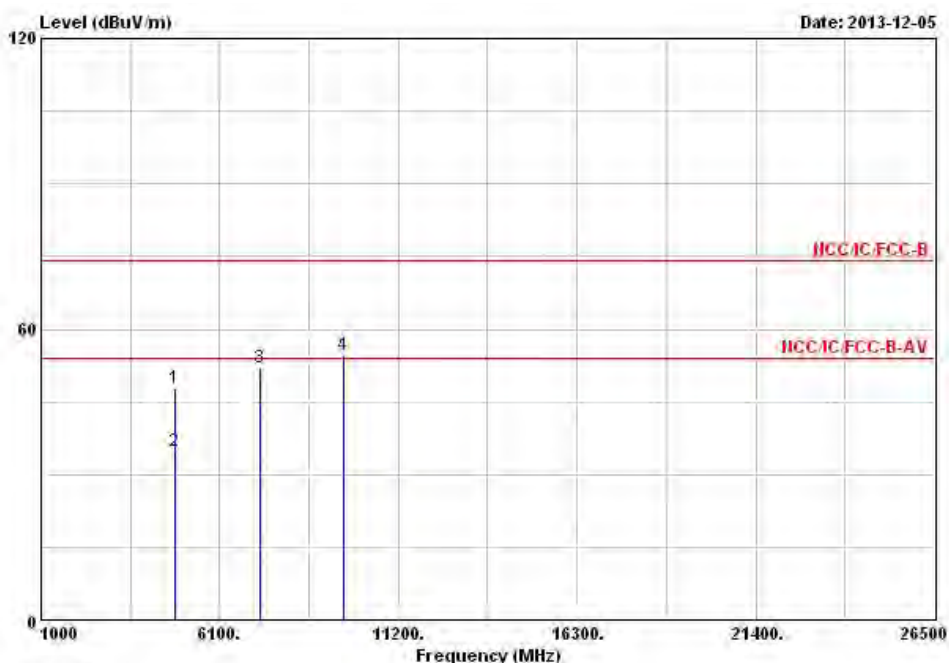

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Preamp	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 4824.000	47.83	-26.17	74.00	40.89	33.09	6.28	32.43	Peak	---	---
2 4824.000	34.86	-19.14	54.00	27.92	33.09	6.28	32.43	Average	---	---
3 7236.000	51.91			40.85	35.88	7.83	32.65	Peak	---	---
4 9648.000	54.71			40.99	38.34	8.48	33.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.76 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N_{TX}	1	Polarization	H

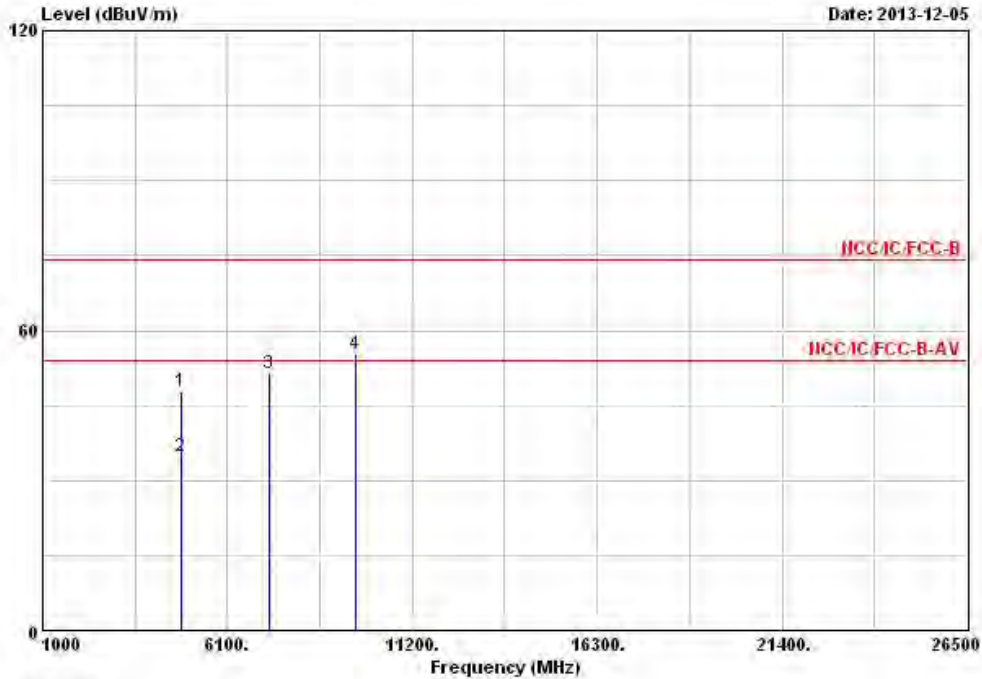

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	47.65	-26.35	74.00	40.71	33.09	6.28	32.43	Peak	---	---
2	4824.000	34.89	-19.11	54.00	27.95	33.09	6.28	32.43	Average	---	---
3	7236.000	51.46			40.40	35.88	7.83	32.65	Peak	---	---
4	9648.000	55.29			41.57	38.34	8.48	33.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.76 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	V

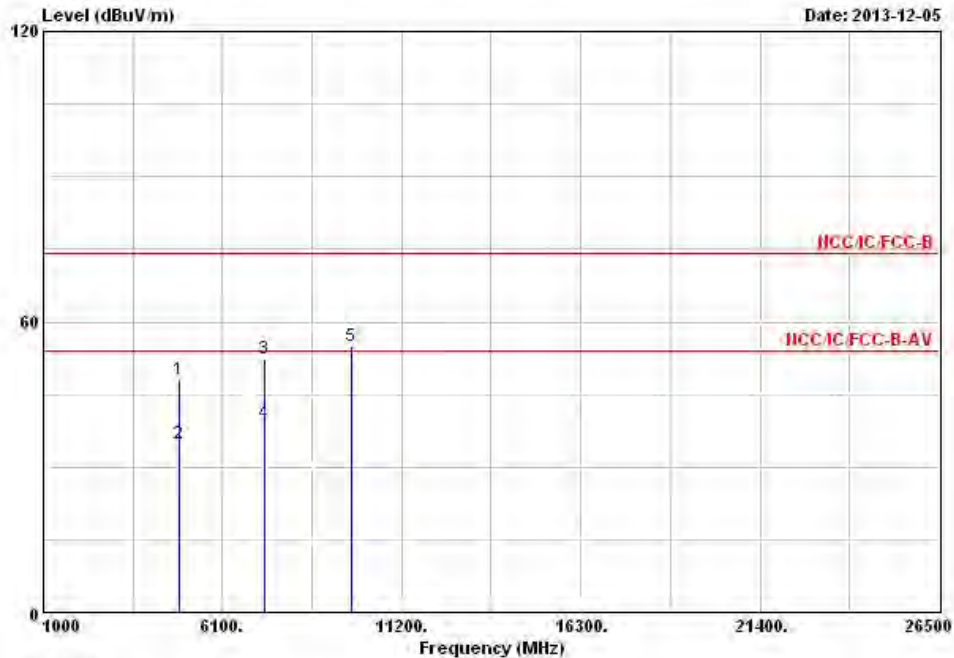

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	48.05	-25.95	74.00	40.97	33.18	6.32	32.42	Peak	---	---
2	4874.000	34.87	-19.13	54.00	27.79	33.18	6.32	32.42	Average	---	---
3	7311.000	52.28	-21.72	74.00	41.03	36.04	7.87	32.66	Peak	---	---
4	7311.000	39.05	-14.95	54.00	27.80	36.04	7.87	32.66	Average	---	---
5	9748.000	54.98			41.05	38.57	8.44	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.96 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	H

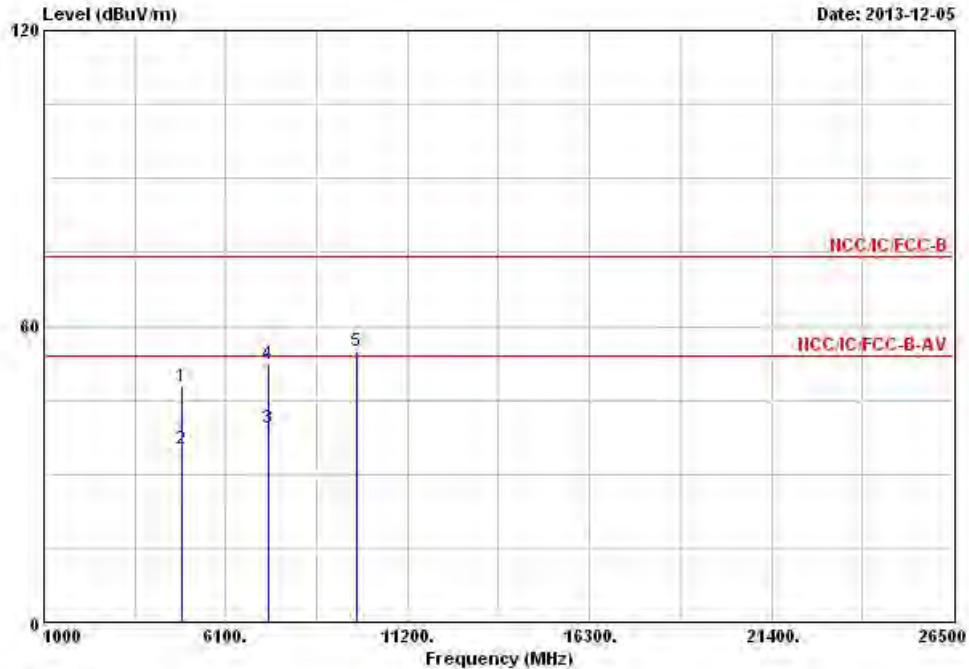

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	47.94	-26.06	74.00	40.86	33.18	6.32	32.42	Peak	---
2	4874.000	35.01	-18.99	54.00	27.93	33.18	6.32	32.42	Average	---
3	7311.000	39.20	-14.80	54.00	27.95	36.04	7.87	32.66	Average	---
4	7311.000	52.21	-21.79	74.00	40.96	36.04	7.87	32.66	Peak	---
5	9748.000	55.06			41.13	38.57	8.44	33.08	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.96 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	V

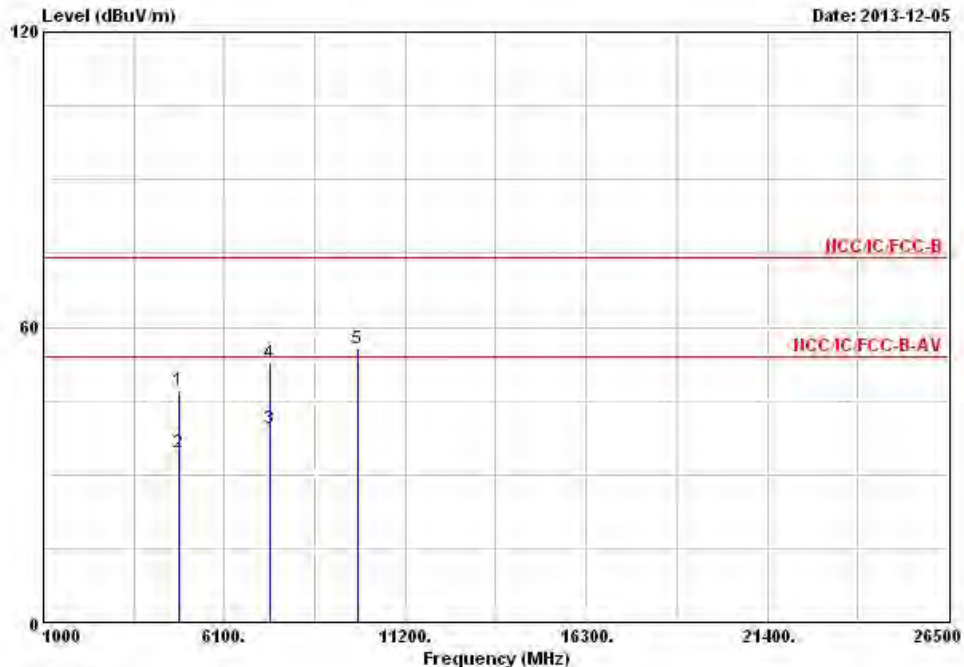

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4824.000	47.06	-26.94	74.00	40.12	33.09	6.28	32.43 Peak	---	---
2	4824.000	34.53	-19.47	54.00	27.59	33.09	6.28	32.43 Average	---	---
3	7386.000	39.45	-14.55	54.00	27.98	36.25	7.91	32.69 Average	---	---
4	7386.000	52.57	-21.43	74.00	41.10	36.25	7.91	32.69 Peak	---	---
5	9848.000	55.46			41.41	38.76	8.37	33.08 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.91 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	H

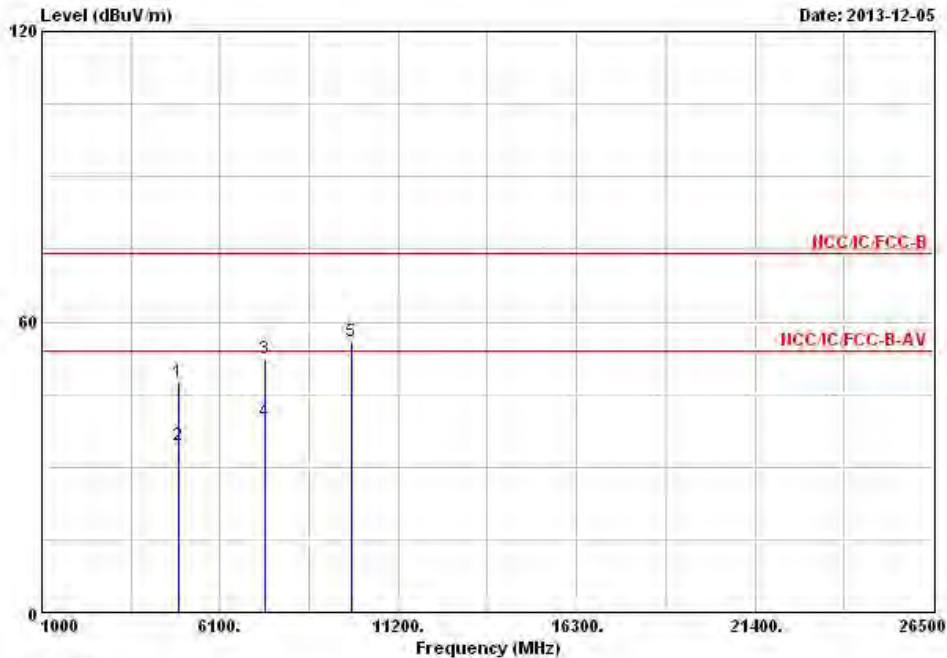

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4924.000	47.33	-26.67	74.00	40.06	33.28	6.40	32.41 Peak	---	---
2	4924.000	34.55	-19.45	54.00	27.28	33.28	6.40	32.41 Average	---	---
3	7386.000	52.21	-21.79	74.00	40.74	36.25	7.91	32.69 Peak	---	---
4	7386.000	39.41	-14.59	54.00	27.94	36.25	7.91	32.69 Average	---	---
5	9848.000	56.01			41.96	38.76	8.37	33.08 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.91 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N_{TX}	1	Polarization	V

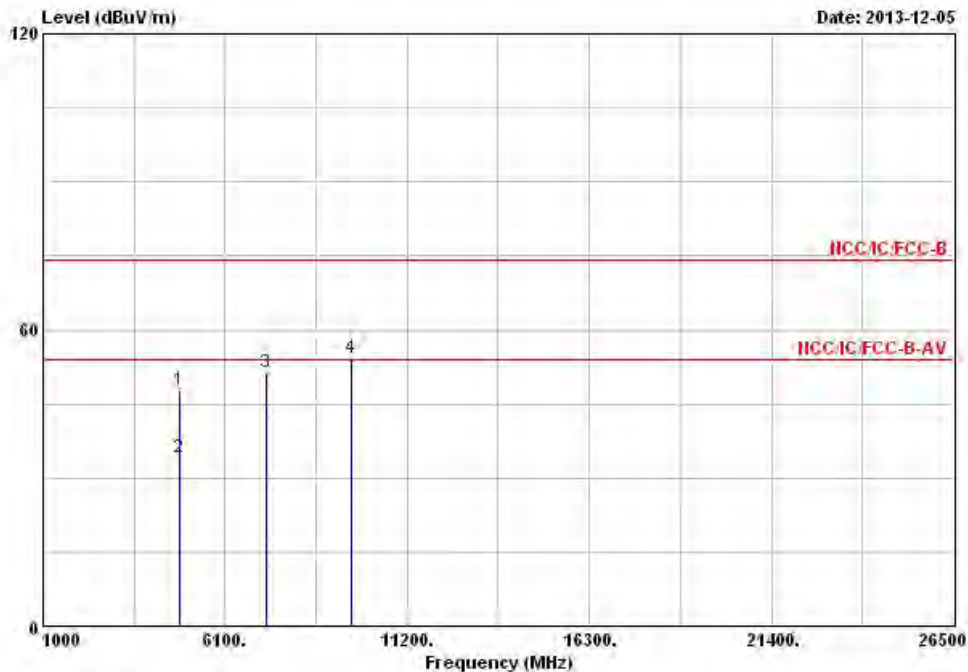

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	47.67	-26.33	74.00	40.73	33.09	6.28	32.43	Peak	---	---
2	4824.000	34.30	-19.70	54.00	27.36	33.09	6.28	32.43	Average	---	---
3	7236.000	51.47			40.41	35.88	7.83	32.65	Peak	---	---
4	9648.000	54.20			40.48	38.34	8.48	33.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.59 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N_{TX}	1	Polarization	H

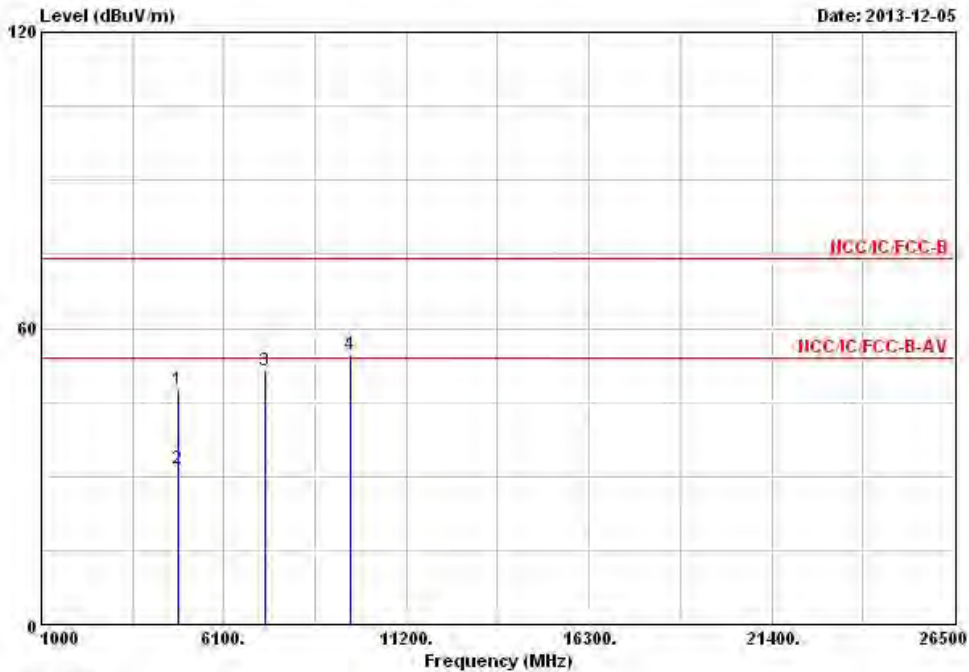

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Remark	Pos	Pos
					dBuV	dB/m	dB	dB	cm	deg
1	4824.000	47.32	-26.68	74.00	40.38	33.09	6.28	32.43	Peak	---
2	4824.000	31.45	-22.55	54.00	24.51	33.09	6.28	32.43	Average	---
3	7236.000	51.48			40.42	35.88	7.83	32.65	Peak	---
4	9648.000	54.54			40.82	38.34	8.48	33.10	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.59 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	V

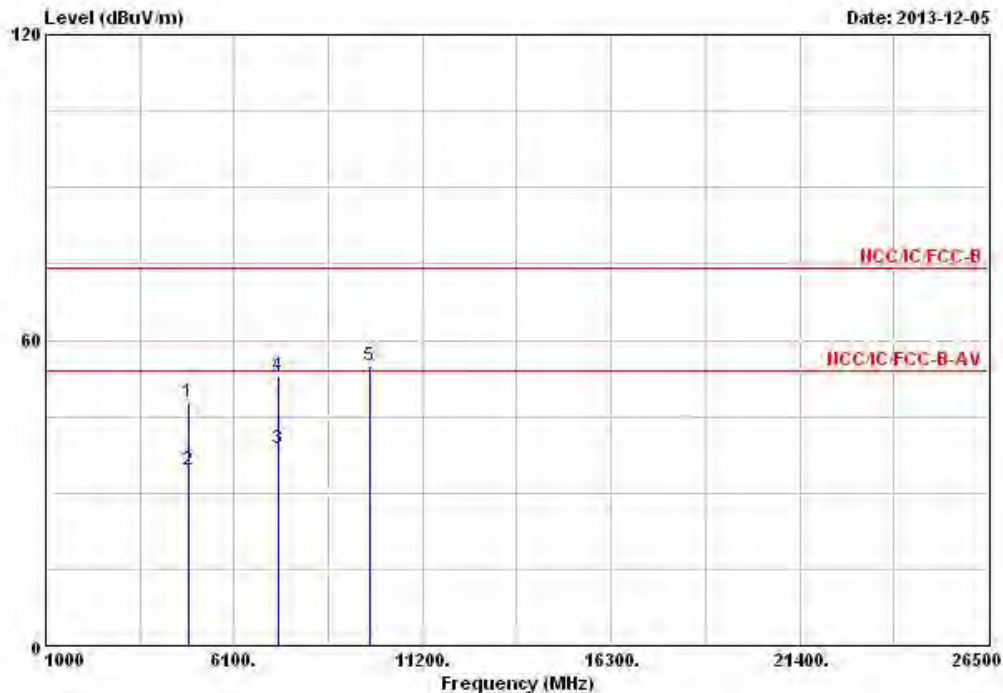

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	47.77	-26.23	74.00	40.69	33.18	6.32	32.42	Peak	---
2	4874.000	34.48	-19.52	54.00	27.40	33.18	6.32	32.42	Average	---
3	7311.000	38.85	-15.15	54.00	27.60	36.04	7.87	32.66	Average	---
4	7311.000	52.93	-21.07	74.00	41.68	36.04	7.87	32.66	Peak	---
5	9748.000	55.04			41.11	38.57	8.44	33.08	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.63 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	H

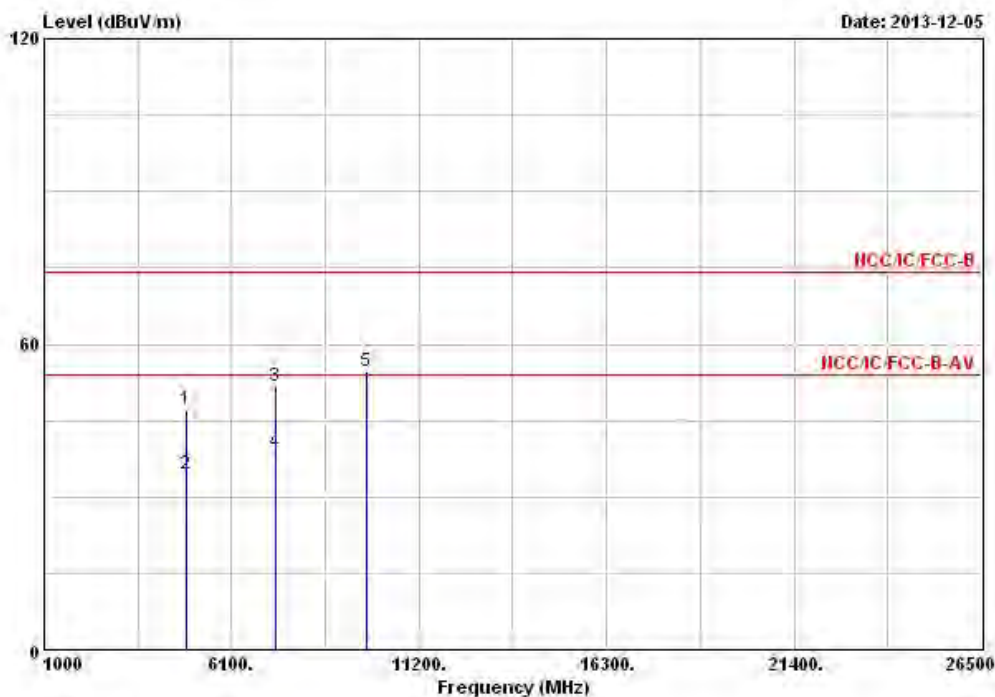

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	47.08	-26.92	74.00	40.00	33.18	6.32	32.42	Peak	---
2	4874.000	34.50	-19.50	54.00	27.42	33.18	6.32	32.42	Average	---
3	7311.000	51.72	-22.28	74.00	40.47	36.04	7.87	32.66	Peak	---
4	7311.000	38.67	-15.33	54.00	27.42	36.04	7.87	32.66	Average	---
5	9748.000	54.66			40.73	38.57	8.44	33.08	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.63 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	V

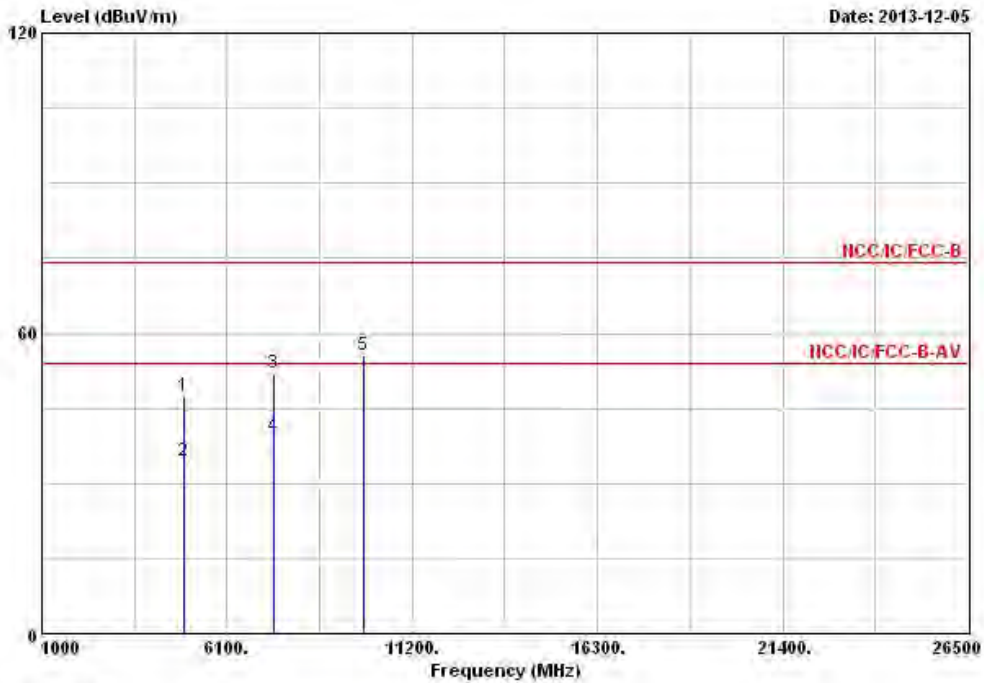

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	47.34	-26.66	74.00	40.07	33.28	6.40	32.41	Peak	---	---
2	4924.000	34.35	-19.65	54.00	27.08	33.28	6.40	32.41	Average	---	---
3	7386.000	52.05	-21.95	74.00	40.58	36.25	7.91	32.69	Peak	---	---
4	7386.000	39.25	-14.75	54.00	27.78	36.25	7.91	32.69	Average	---	---
5	9848.000	55.45			41.40	38.76	8.37	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.16 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N_{TX}	1	Polarization	H

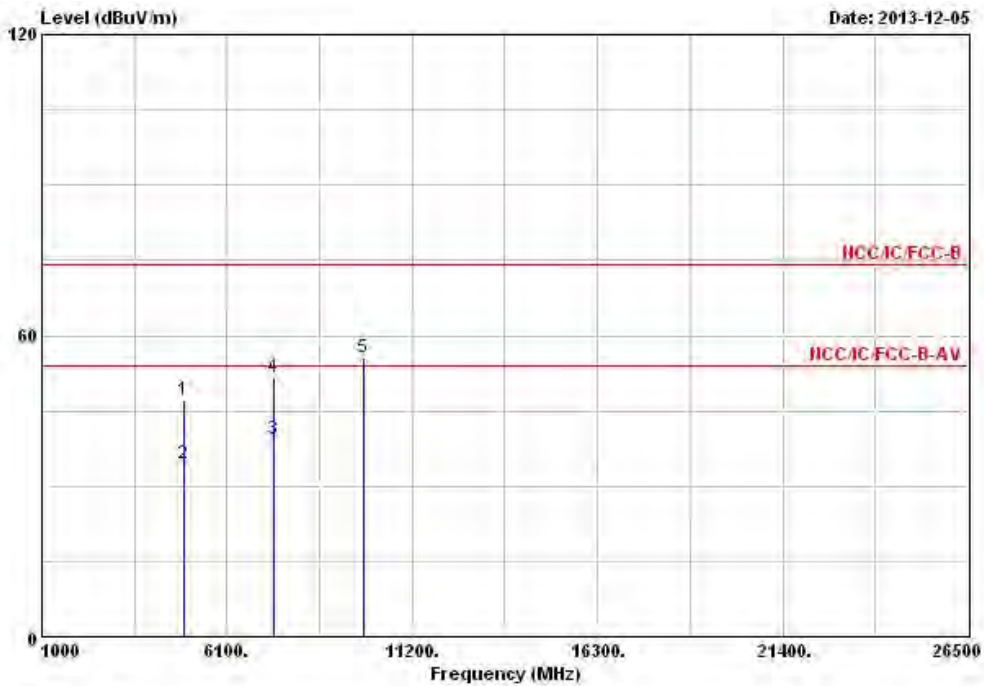

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	47.24	-26.76	74.00	39.97	33.28	6.40	32.41	Peak	---	---
2	4924.000	34.38	-19.62	54.00	27.11	33.28	6.40	32.41	Average	---	---
3	7386.000	39.22	-14.78	54.00	27.75	36.25	7.91	32.69	Average	---	---
4	7386.000	51.75	-22.25	74.00	40.28	36.25	7.91	32.69	Peak	---	---
5	9848.000	55.45			41.40	38.76	8.37	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.16 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N_{TX}	1	Polarization	V

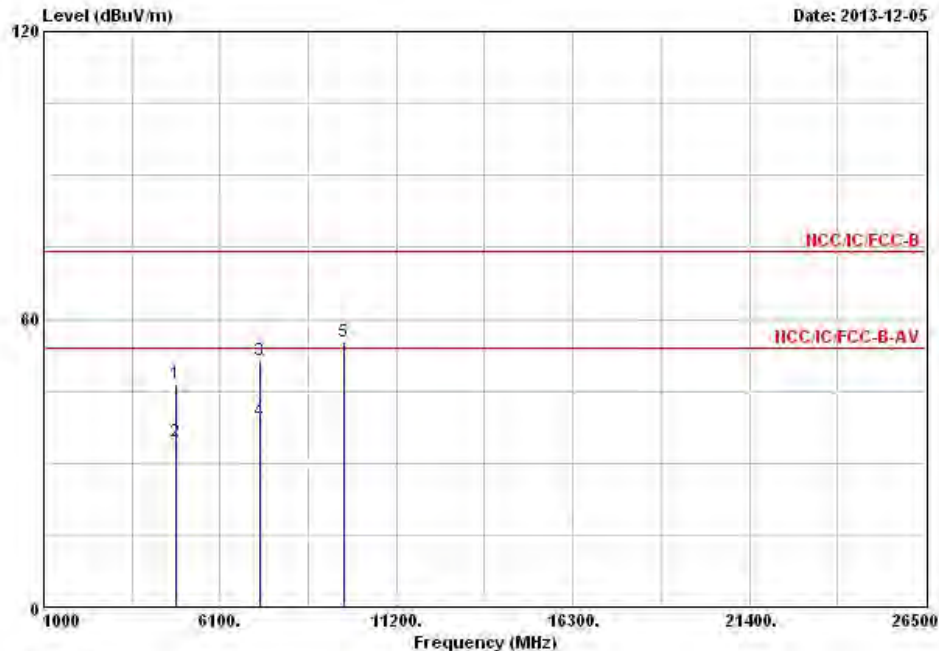

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	46.42	-27.58	74.00	39.41	33.12	6.32	32.43	Peak	---	---
2	4844.000	34.56	-19.44	54.00	27.55	33.12	6.32	32.43	Average	---	---
3	7266.000	51.27	-22.73	74.00	40.12	35.96	7.85	32.66	Peak	---	---
4	7266.000	38.77	-15.23	54.00	27.62	35.96	7.85	32.66	Average	---	---
5	9688.000	55.34			41.55	38.42	8.46	33.09	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.73 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N_{TX}	1	Polarization	H

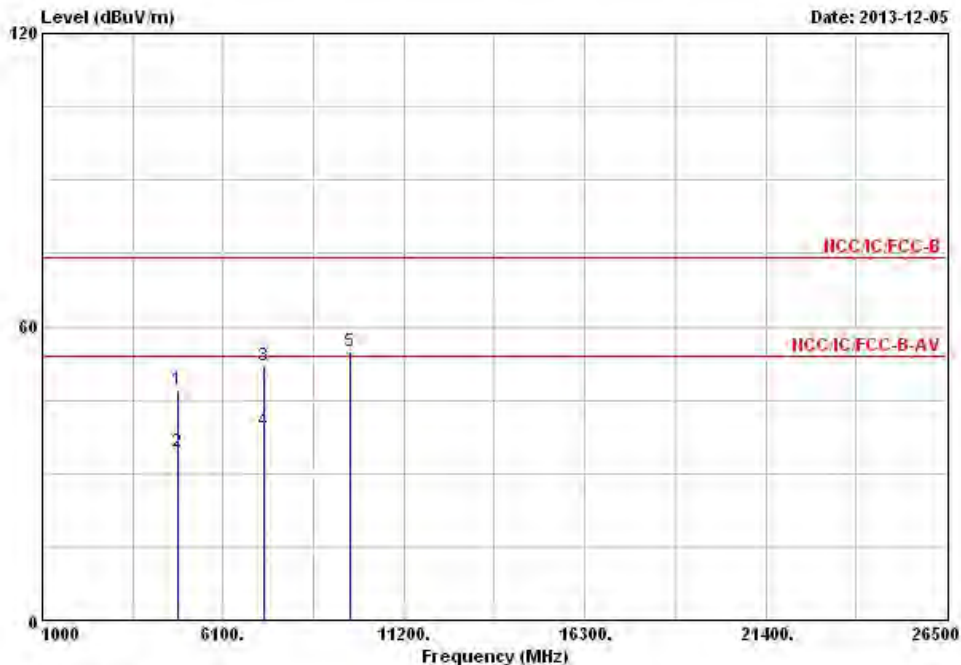

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	47.03	-26.97	74.00	40.02	33.12	6.32	32.43	Peak	---	---
2	4844.000	34.34	-19.66	54.00	27.33	33.12	6.32	32.43	Average	---	---
3	7266.000	52.05	-21.95	74.00	40.90	35.96	7.85	32.66	Peak	---	---
4	7266.000	38.71	-15.29	54.00	27.56	35.96	7.85	32.66	Average	---	---
5	9688.000	55.07			41.28	38.42	8.46	33.09	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.73 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	V

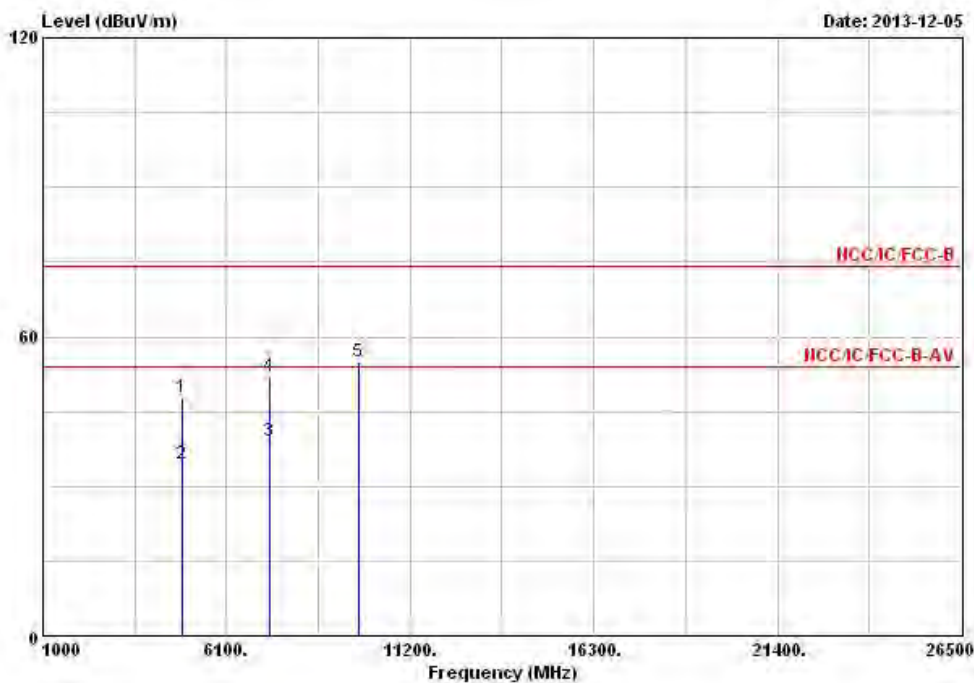

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	47.86	-26.14	74.00	40.78	33.18	6.32	32.42 Peak	---	---
2	4874.000	34.54	-19.46	54.00	27.46	33.18	6.32	32.42 Average	---	---
3	7311.000	38.87	-15.13	54.00	27.62	36.04	7.87	32.66 Average	---	---
4	7311.000	52.18	-21.82	74.00	40.93	36.04	7.87	32.66 Peak	---	---
5	9748.000	54.90			40.97	38.57	8.44	33.08 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.98 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

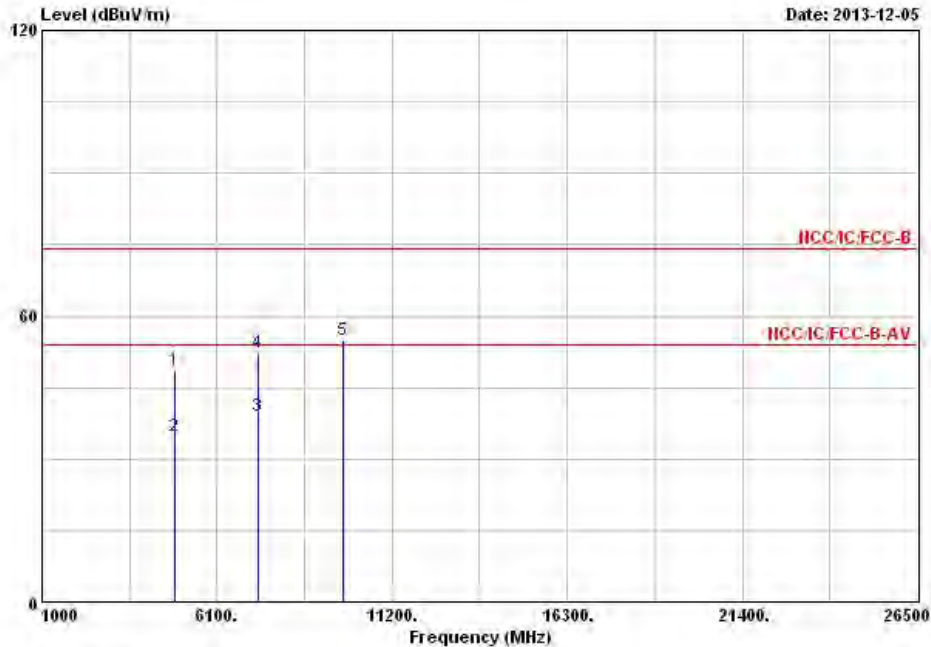

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	48.73	-25.27	74.00	41.65	33.18	6.32	32.42	Peak	---
2	4874.000	34.64	-19.36	54.00	27.56	33.18	6.32	32.42	Average	---
3	7311.000	38.92	-15.08	54.00	27.67	36.04	7.87	32.66	Average	---
4	7311.000	52.33	-21.67	74.00	41.08	36.04	7.87	32.66	Peak	---
5	9748.000	54.83			40.90	38.57	8.44	33.08	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.98 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N_{TX}	1	Polarization	V

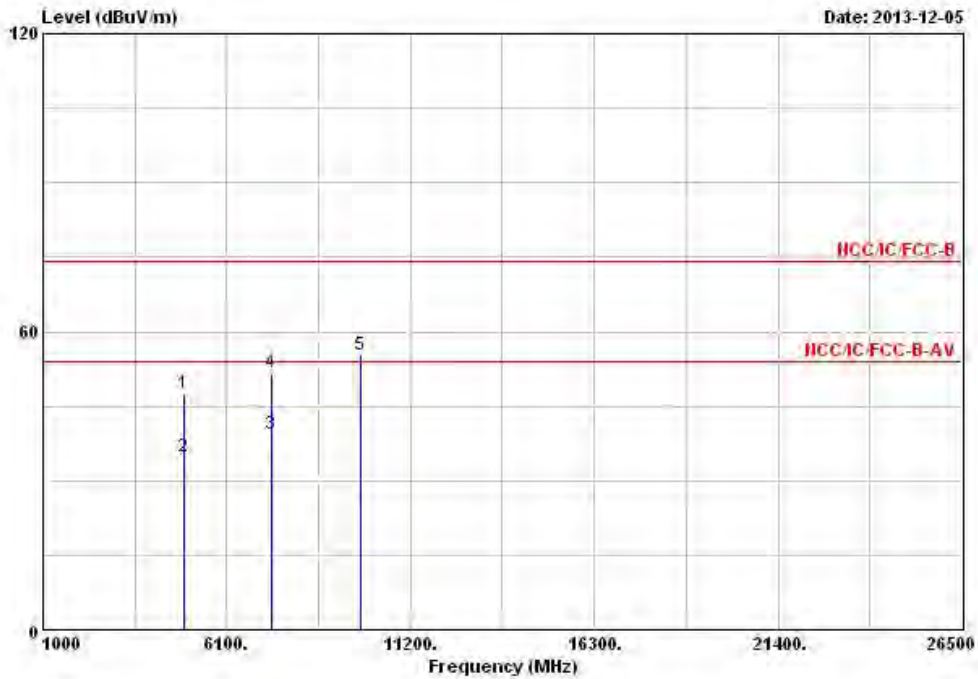

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4904.000	47.39	-26.61	74.00	40.21	33.24	6.36	32.42	Peak	---	---
2	4904.000	34.66	-19.34	54.00	27.48	33.24	6.36	32.42	Average	---	---
3	7356.000	39.24	-14.76	54.00	27.86	36.17	7.89	32.68	Average	---	---
4	7356.000	51.82	-22.18	74.00	40.44	36.17	7.89	32.68	Peak	---	---
5	9808.000	55.16			41.17	38.68	8.39	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.86 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N_{TX}	1	Polarization	H

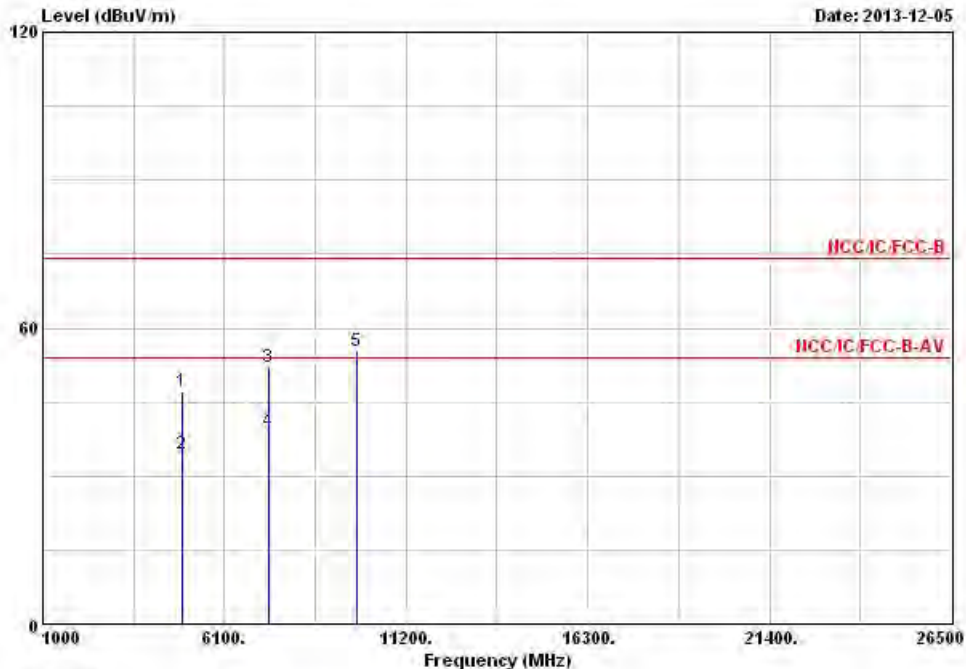

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4904.000	47.14	-26.86	74.00	39.96	33.24	6.36	32.42	Peak	---
2	4904.000	34.49	-19.51	54.00	27.31	33.24	6.36	32.42	Average	---
3	7356.000	52.01	-21.99	74.00	40.63	36.17	7.89	32.68	Peak	---
4	7356.000	39.17	-14.83	54.00	27.79	36.17	7.89	32.68	Average	---
5	9808.000	55.25			41.26	38.68	8.39	33.08	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.86 dBuV/m).

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH06-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH06-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345673/4	30MHz ~ 26.5GHz	Dec. 02, 2013	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 11, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.