



FCC RADIO TEST REPORT

Applicant's company	Buffalo Inc.
Applicant Address	AKAMONDORI Bldg.,30-20, Ohsu 3-chome,Naka-ku, Nagoya 460-8315 Japan
FCC ID	FDI0000000022
Manufacturer's company	Buffalo Inc.
Manufacturer Address	AKAMONDORI Bldg.,30-20, Ohsu 3-chome,Naka-ku, Nagoya 460-8315 Japan

Product Name	AirStation
Brand Name	Buffalo Inc.
Model No.	WXR-1900DHP
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Aug. 15, 2014
Final Test Date	Sep. 25, 2014
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	12
3.10. Duty Cycle.....	13
3.11. Test Configurations	14
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	22
4.3. Maximum Conducted Output Power Measurement.....	33
4.4. Power Spectral Density Measurement	36
4.5. Radiated Emissions Measurement	45
4.6. Band Edge Emissions Measurement	66
4.7. Frequency Stability Measurement	75
4.8. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. MEASUREMENT UNCERTAINTY.....	80
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A18
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3
APPENDIX D. RADIATED EMISSION CO-LOCATION REPORT	D1 ~ D3



History of This Test Report



1. CERTIFICATE OF COMPLIANCE

Product Name : AirStation
Brand Name : Buffalo Inc.
Model No. : WXR-1900DHP
Applicant : Buffalo Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 15, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sam Chen
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.68 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.64 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.38 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.06 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.02 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For Non-Beamforming Mode</u> 802.11ac MCS0/Nss1 (VHT20): 27.84 MHz ; 802.11ac MCS0/Nss1 (VHT40): 35.84 MHz ; 802.11ac MCS0/Nss1 (VHT80): 74.88 MHz <u>For Beamforming Mode</u> 802.11ac MCS0/Nss1 (VHT20): 18.24 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz
Maximum Conducted Output Power	<u>For Non-Beamforming Mode</u> 802.11ac MCS0/Nss1 (VHT20): 28.36 MHz ; 802.11ac MCS0/Nss1 (VHT40): 22.02 MHz ; 802.11ac MCS0/Nss1 (VHT80): 17.55 MHz <u>For Beamforming Mode</u> 802.11ac MCS0/Nss1 (VHT20): 23.27 MHz ; 802.11ac MCS0/Nss1 (VHT40): 21.80 MHz ; 802.11ac MCS0/Nss1 (VHT80): 18.03 MHz
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	24.96 MHz
Maximum Conducted Output Power	27.94 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
Band 1 Information	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Fixed point-to-point
	<input checked="" type="checkbox"/> Indoor	
	<input type="checkbox"/> Outdoor	

Note: The product has beam forming function for 802.11n/ac in 5GHz

Antenna and Band width

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

Note 4: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 5: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac. All test results were recorded in the report.

3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	WA-36A12U	Input: 100-240V ~ 50-60Hz 0.9A Max Output: 12V, 3A
Other			
Cradle*1			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	M.gear	C600-510026-A	Dipole Antenna	Reversed-SMA	2	3
2	M.gear	C600-510026-A	Dipole Antenna	Reversed-SMA	2	3
3	M.gear	C600-510026-A	Dipole Antenna	Reversed-SMA	2	3

Note1: The EUT has three antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (3TX/3RX):

Chain 1, Chain 2 and Chain 3 will transmit/receive the same signal simultaneously.


Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antennas.

For 5GHz function:

For IEEE 802.11 a/n/ac mode (3TX, 3RX):

Chain 1, Chain 2 and Chain 3 will transmit/receive the same signal simultaneously.

Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antennas.

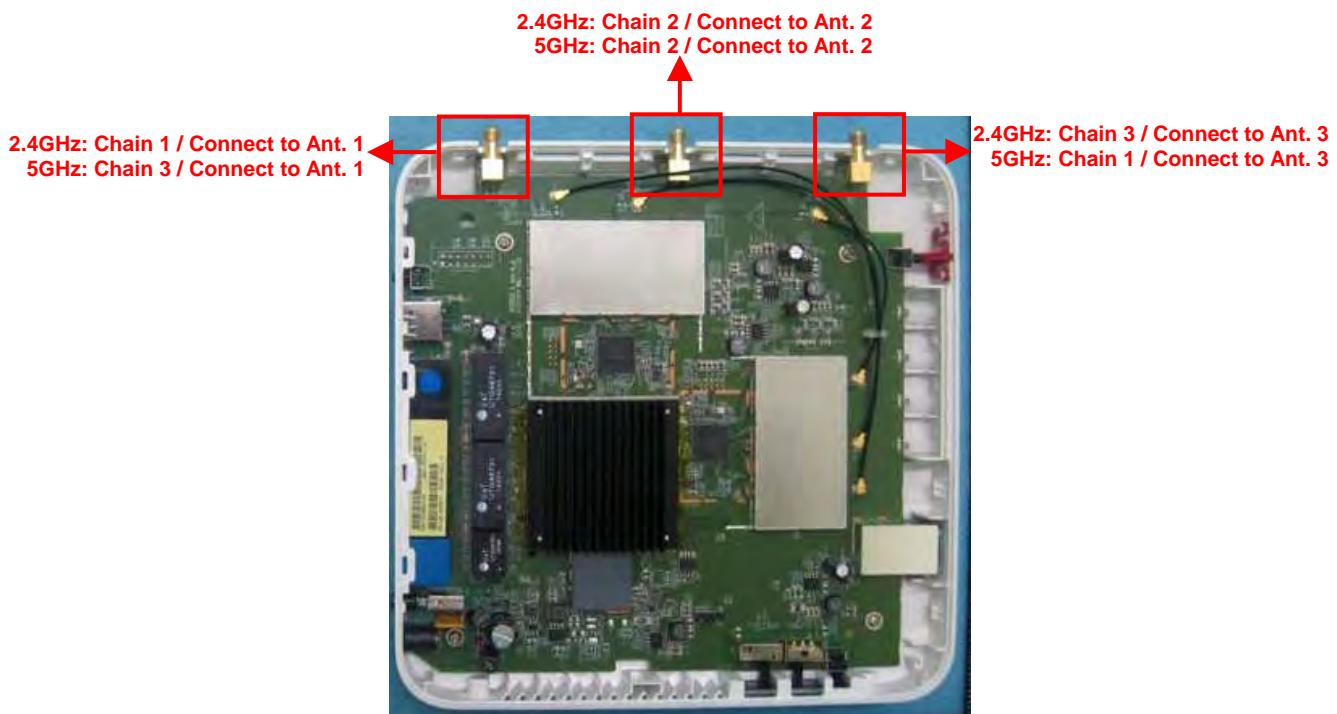

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Power Spectral Density	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Band Edge Emission	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Frequency Stability	Un-modulation		-	40	1+2+3

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - AP Mode

Mode 2. Normal Link - Repeater mode

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Below 1G):

Mode 1. Normal Link - AP Mode

Mode 2. Normal Link - Repeater mode

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test (Above 1G):

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix C) and Radiated Emission Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
NB	DELL	E6430	DoC
NB	DELL	D420	R33002
Flash Disk	Silicon	D33B03	DoC
Flash Disk	Transcend	TS16GJF760	DoC
Wireless ac AP	Netgear	R6300V2	PY313200227

For Test Site No: 03CH01-CB (Above 1GHz)

For Non-Beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

For Beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	M1340	DoC
WLAN ac Dongle	Netgear	A6200	PY312200200

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
Flash Disk	Silicon	I-Series	DoC
Flash Disk3.0	TDK	TF30	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Non-Beamforming Mode:

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Mtool_2.0.1.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	68	58	97

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	Mtool_2.0.1.6	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	59	69

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	Mtool_2.0.1.6	
Frequency	5210 MHz	
MCS0/Nss1 VHT80	50	

Power Parameters of IEEE 802.11a

Test Software Version	Mtool_2.0.1.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	70	54	96

For Beamforming Mode:

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Mtool_2.0.1.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	67	39	75

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	Mtool_2.0.1.6	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	58	69

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	Mtool_2.0.1.6	
Frequency	5210 MHz	
MCS0/Nss1 VHT80	54	

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For Beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by Wireless ac and transmit duty cycle no less 98%

3.10.Duty Cycle

For Non-Beamforming Mode:


Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
5G	802.11ac MCS0/Nss1 VHT20	1.000	1.000	100.00%	0.00	0.01
	802.11ac MCS0/Nss1 VHT40	0.950	0.972	97.78%	0.10	1.05
	802.11ac MCS0/Nss1 VHT80	0.470	0.480	97.92%	0.09	2.13
	802.11a	2.060	2.100	98.10%	0.08	0.01

For beamforming mode:

Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
5G	802.11ac MCS0/Nss1 VHT20	3.830	4.135	92.64%	0.33	0.26
	802.11ac MCS0/Nss1 VHT40	4.647	4.904	94.77%	0.23	0.22
	802.11ac MCS0/Nss1 VHT80	5.128	5.481	93.57%	0.29	0.20

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

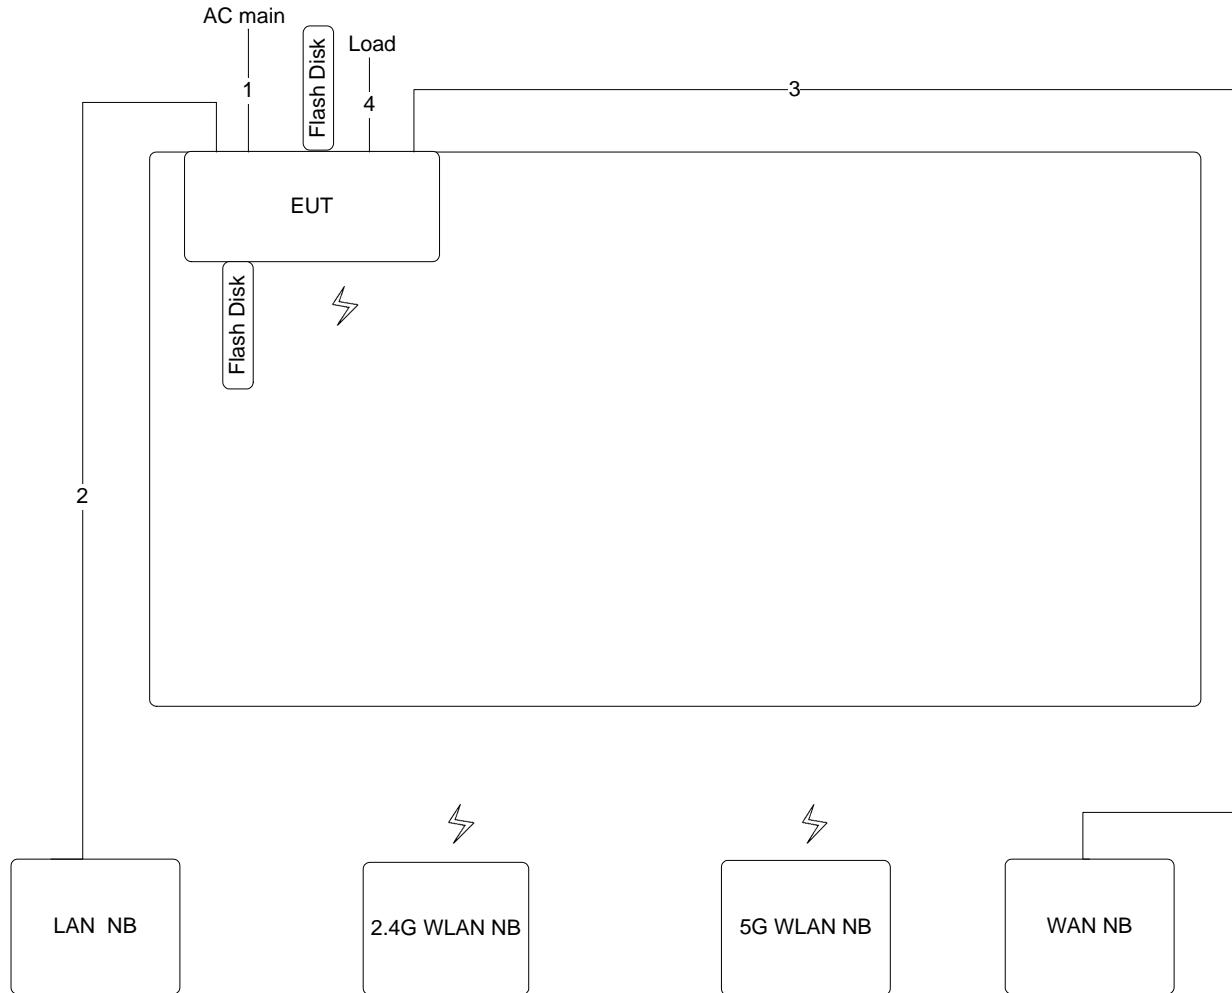

Item	Connection	Shield	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable	No	1.5m	Load*3


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

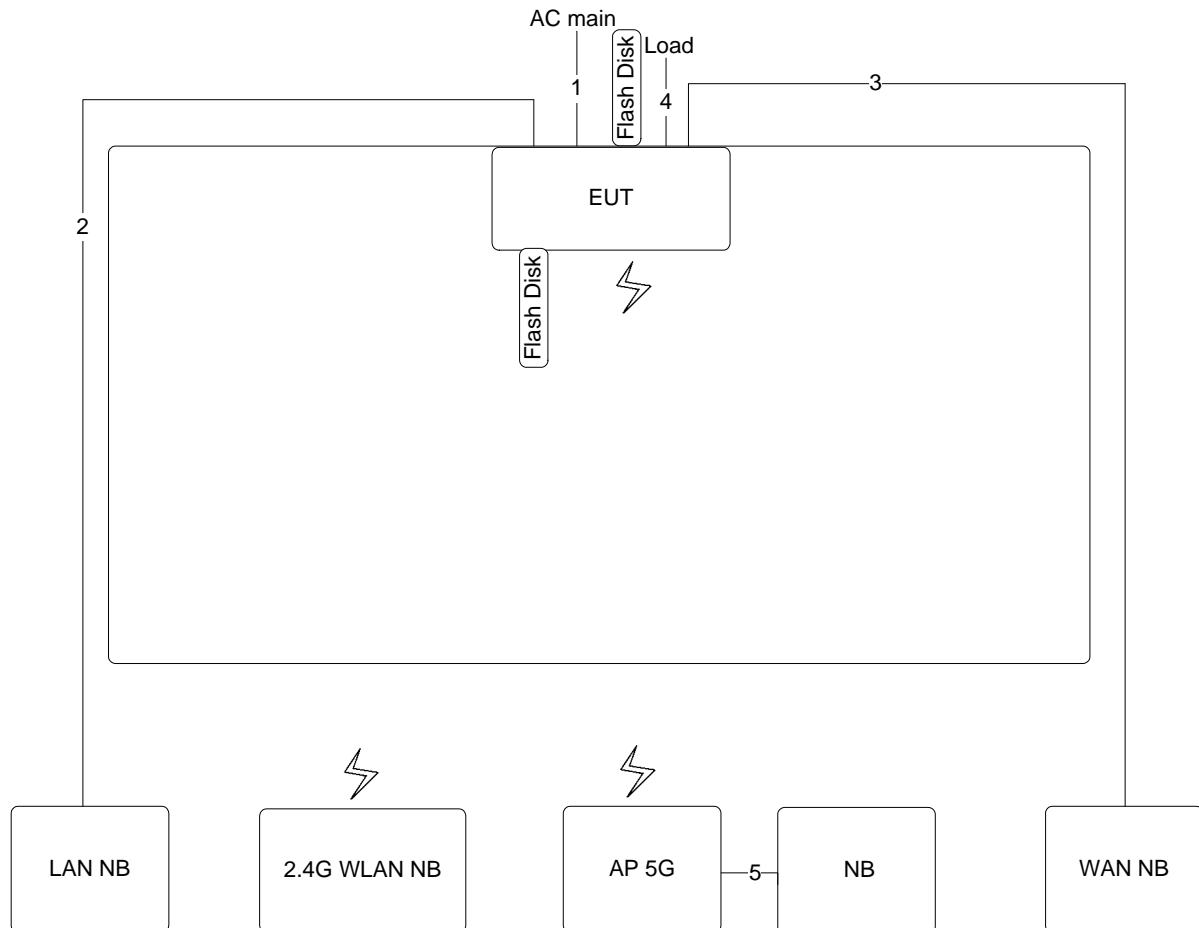


Item	Connection	Shield	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable	No	1.5m	Load*3
5	RJ-45 cable	No	1m	-

Test Configuration: above 1GHz (Non-Beamforming Mode)

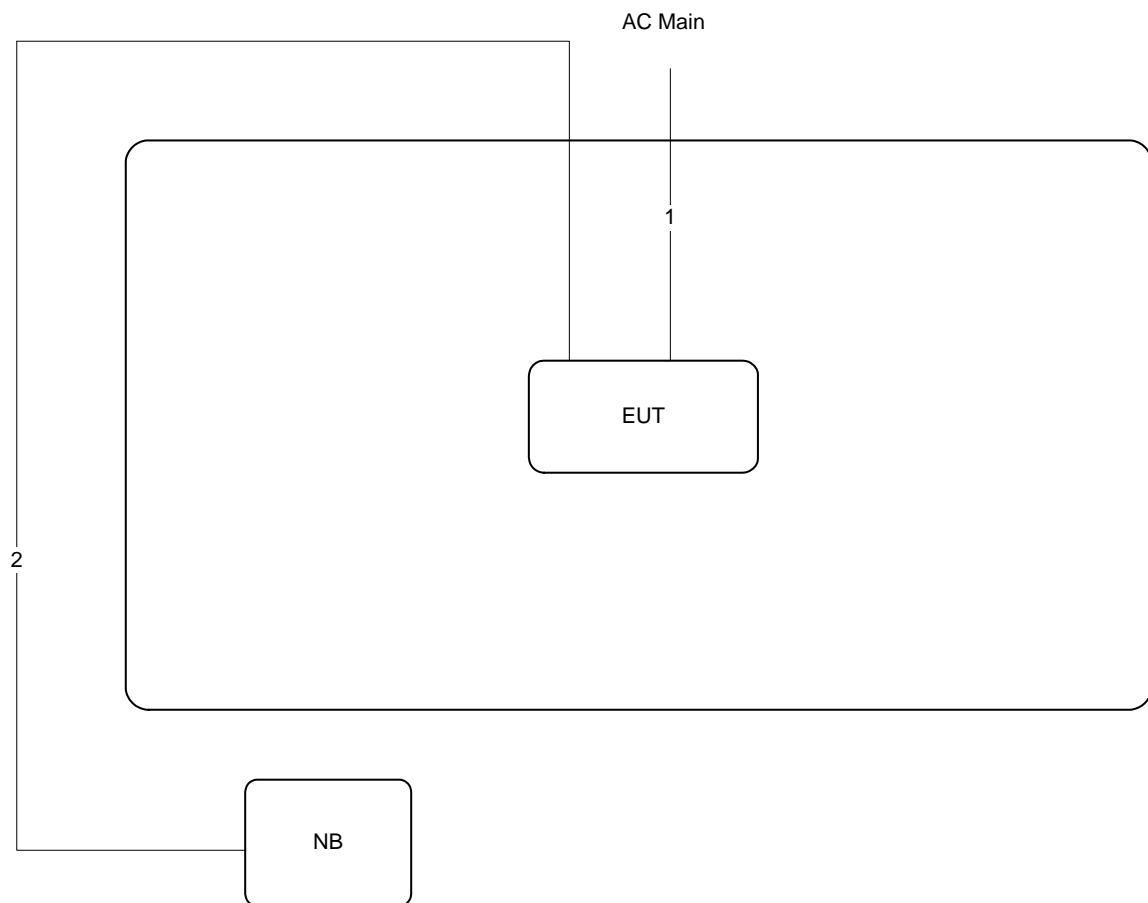

Item	Connection	Shielded	Length(m)	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-

Test Configuration: above 1GHz (Beamforming Mode)

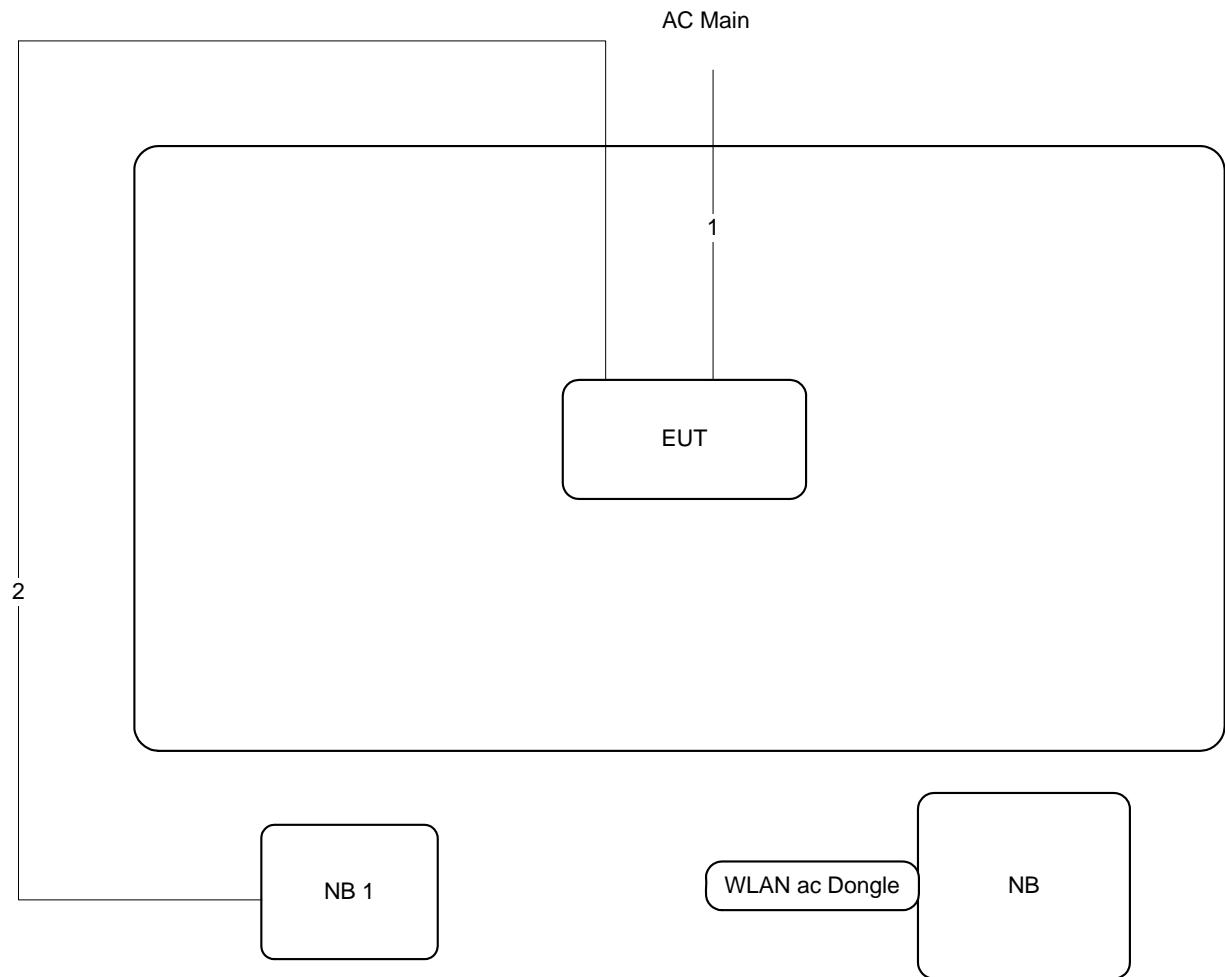

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

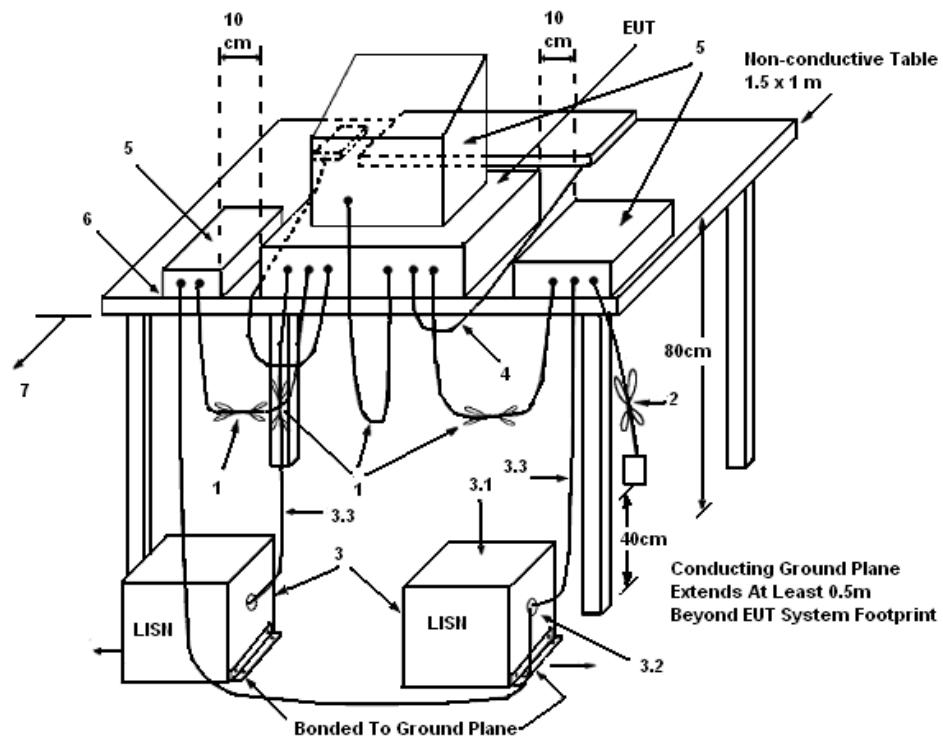

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in $50\ \Omega$. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

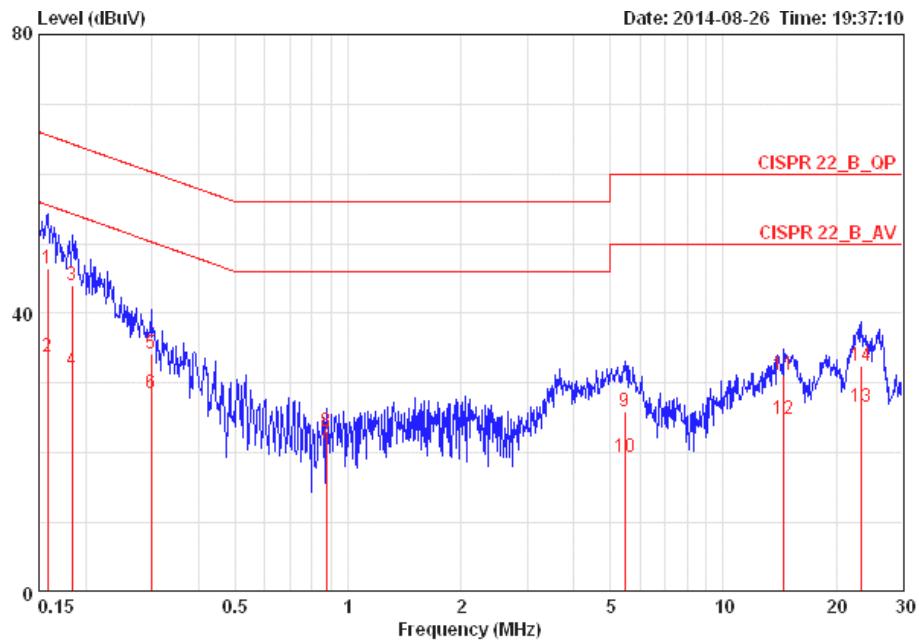

Freq	Level	Over Limit	Limit	LISN	Read Level	Cable Loss	Remark		
							MHz	dBuV	dB
1	0.15816	46.42	-19.14	65.56	0.10	46.16	0.16	LINE	QP
2	0.15816	33.85	-21.71	55.56	0.10	33.59	0.16	LINE	AVERAGE
3	0.18346	44.09	-20.23	64.33	0.10	43.83	0.16	LINE	QP
4	0.18346	31.88	-22.44	54.33	0.10	31.62	0.16	LINE	AVERAGE
5	0.29869	34.20	-26.08	60.28	0.10	33.93	0.17	LINE	QP
6	0.29869	28.62	-21.66	50.28	0.10	28.35	0.17	LINE	AVERAGE
7	0.87566	21.41	-24.59	46.00	0.13	21.09	0.20	LINE	AVERAGE
8	0.87566	23.06	-32.94	56.00	0.13	22.74	0.20	LINE	QP
9	5.476	25.98	-34.02	60.00	0.25	25.40	0.33	LINE	QP
10	5.476	19.35	-30.65	50.00	0.25	18.77	0.33	LINE	AVERAGE
11	14.517	31.11	-28.89	60.00	0.42	30.25	0.44	LINE	QP
12	14.517	24.80	-25.20	50.00	0.42	23.94	0.44	LINE	AVERAGE
13	23.387	26.59	-23.41	50.00	0.48	25.56	0.55	LINE	AVERAGE
14	23.387	32.38	-27.62	60.00	0.48	31.35	0.55	LINE	QP

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

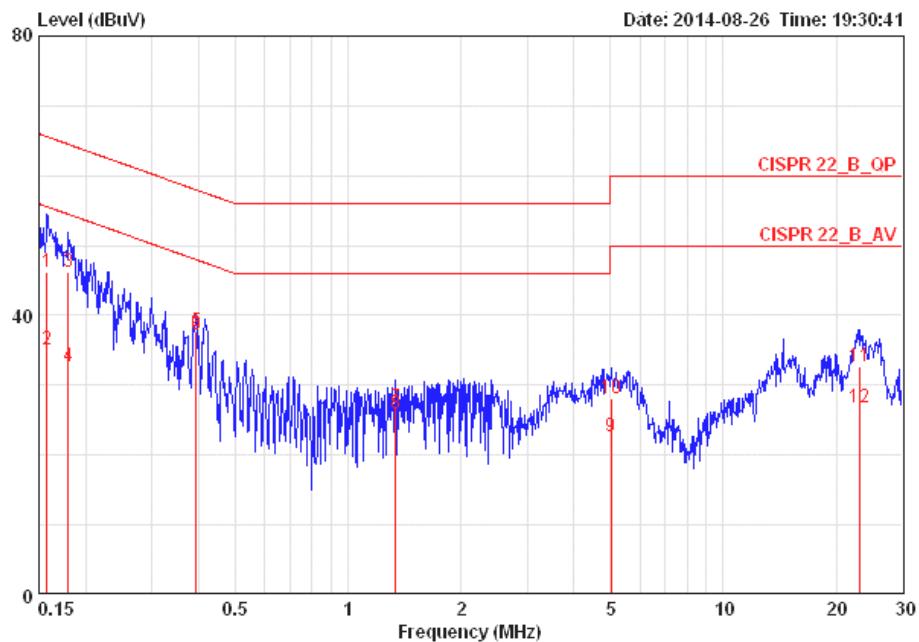

	Freq	Level	Over Limit	Limit	LISN	Read	Cable			Remark
							MHz	dBuV	dB	
1	0.15733	46.11	-19.49	65.60	0.09	45.86	0.16	NEUTRAL	QP	
2	0.15733	35.09	-20.51	55.60	0.09	34.84	0.16	NEUTRAL	AVERAGE	
3	0.17961	46.26	-18.24	64.50	0.09	46.01	0.16	NEUTRAL	QP	
4	0.17961	32.74	-21.76	54.50	0.09	32.49	0.16	NEUTRAL	AVERAGE	
5	0.39344	37.78	-20.21	57.99	0.09	37.51	0.18	NEUTRAL	QP	
6	0.39344	37.31	-10.68	47.99	0.09	37.04	0.18	NEUTRAL	AVERAGE	
7	1.338	26.84	-29.16	56.00	0.13	26.49	0.22	NEUTRAL	QP	
8	1.338	25.98	-20.02	46.00	0.13	25.63	0.22	NEUTRAL	AVERAGE	
9	5.031	22.59	-27.41	50.00	0.22	22.05	0.32	NEUTRAL	AVERAGE	
10	5.031	28.01	-31.99	60.00	0.22	27.47	0.32	NEUTRAL	QP	
11	23.018	32.65	-27.35	60.00	0.45	31.65	0.55	NEUTRAL	QP	
12	23.018	26.71	-23.29	50.00	0.45	25.71	0.55	NEUTRAL	AVERAGE	

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

For Non-Beamforming Mode

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	17.92
40	5200 MHz	19.84	17.92
48	5240 MHz	41.28	27.84

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	38.40	35.84
46	5230 MHz	38.40	35.84

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.28	74.88

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	16.64
40	5200 MHz	20.00	16.80
48	5240 MHz	41.76	24.96

For Beamforming Mode

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	17.92
40	5200 MHz	20.48	17.92
48	5240 MHz	21.76	18.24

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.36	36.48
46	5230 MHz	39.36	36.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	82.56	76.16


For Non-Beamforming Mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

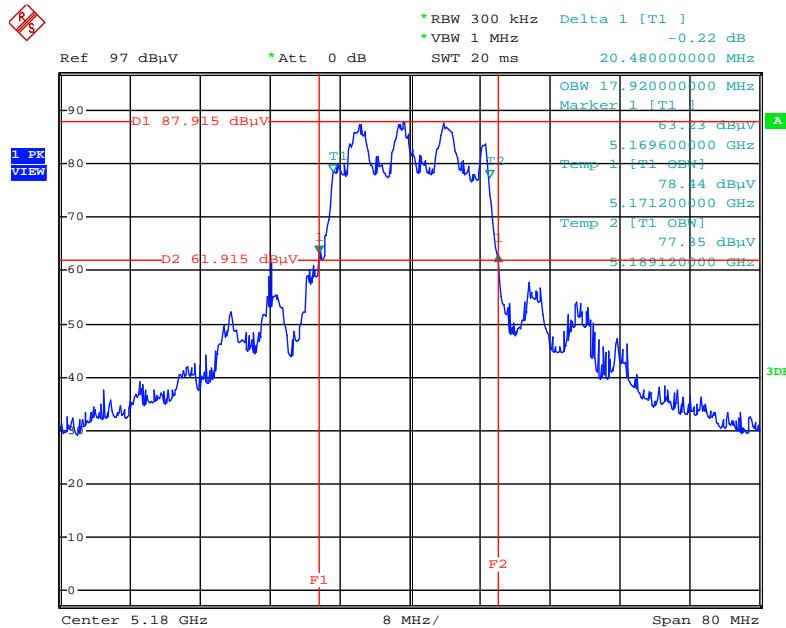


Date: 25.SEP.2014 08:15:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

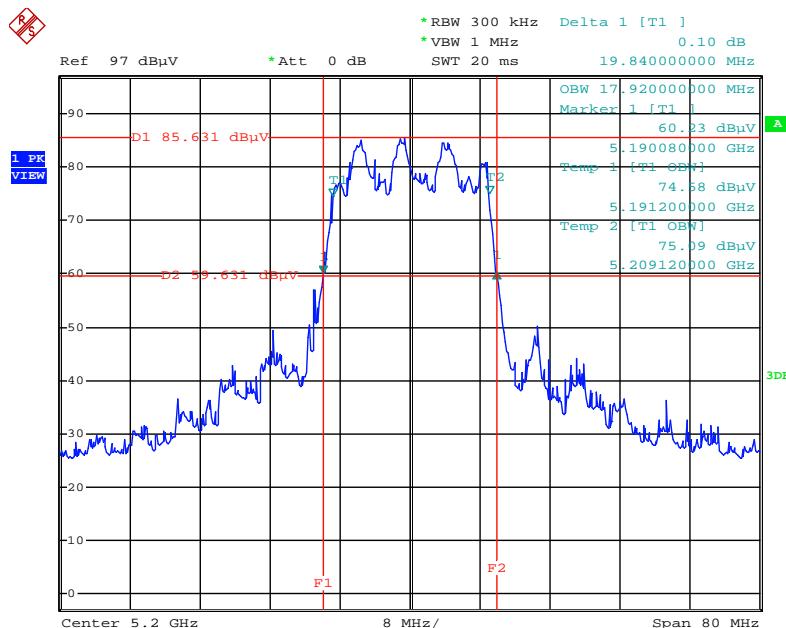


Date: 25.SEP.2014 08:17:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

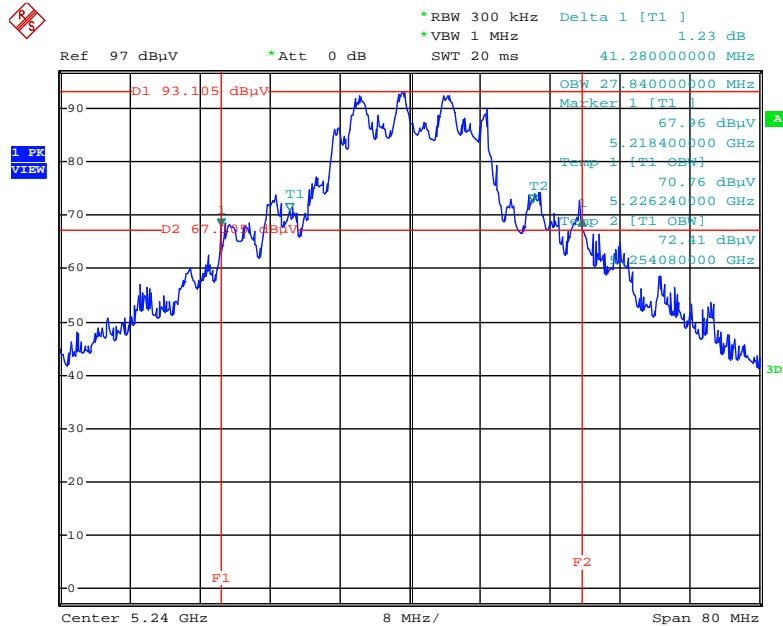


Date: 25.SEP.2014 08:18:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5190 MHz

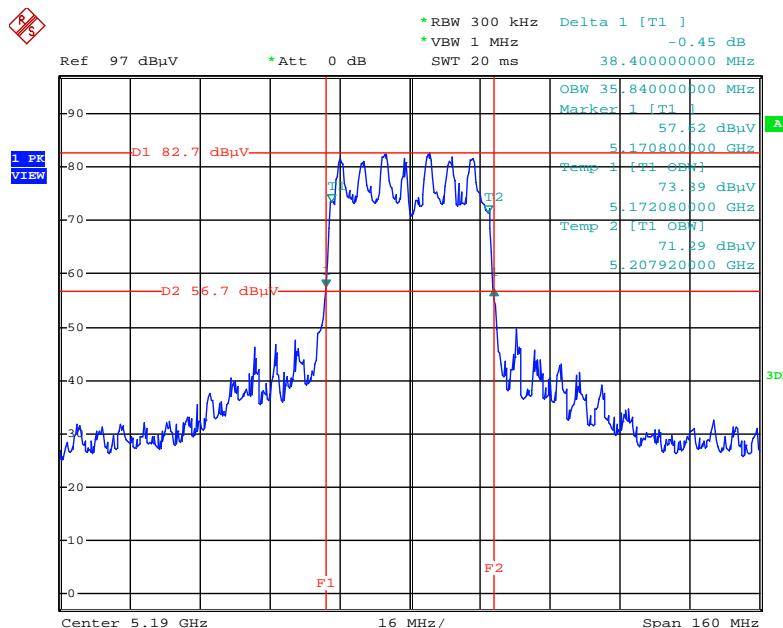


Date: 25.SEP.2014 08:19:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

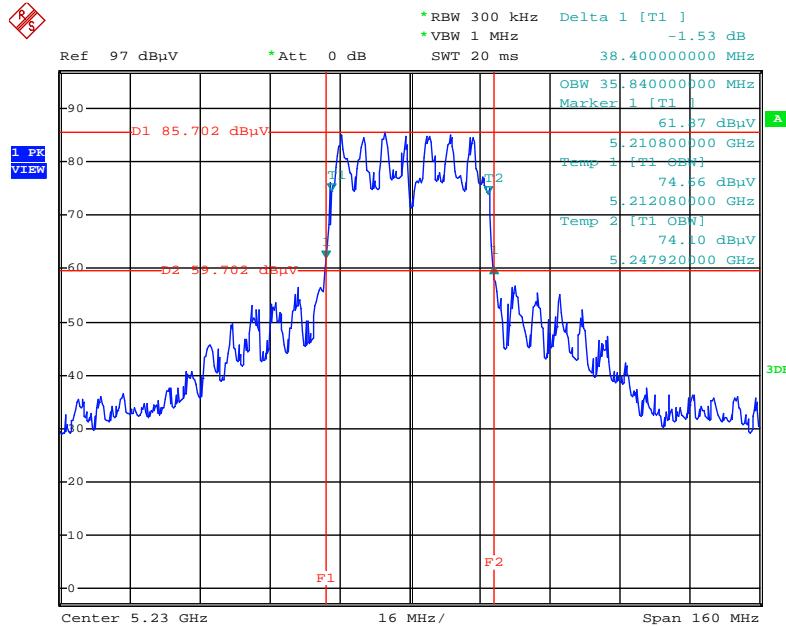


Date: 25.SEP.2014 08:19:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

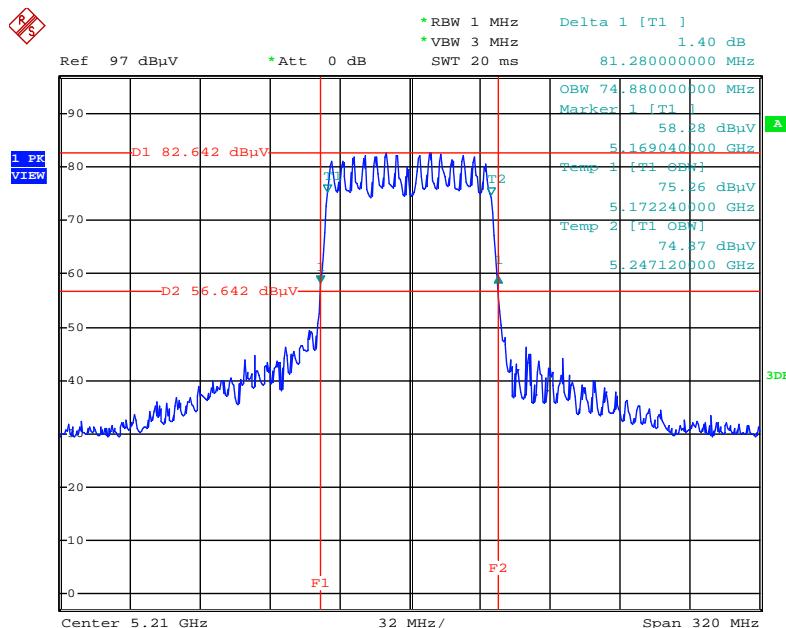


Date: 25.SEP.2014 08:20:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

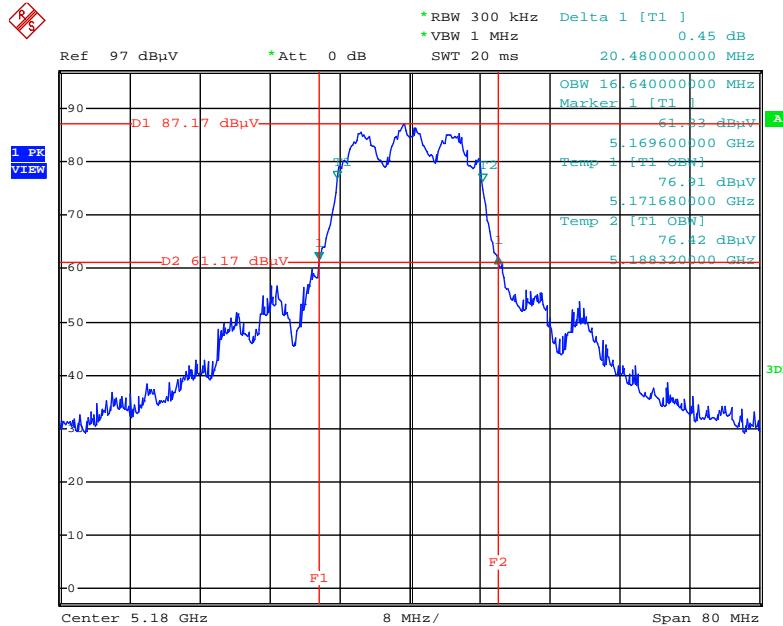


Date: 24.SEP.2014 17:11:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

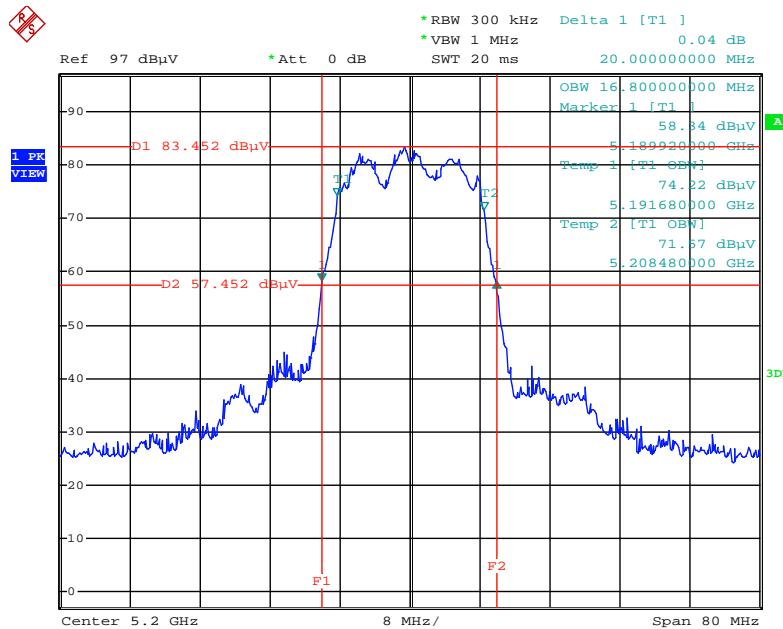

Date: 24.SEP.2014 17:11:53


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

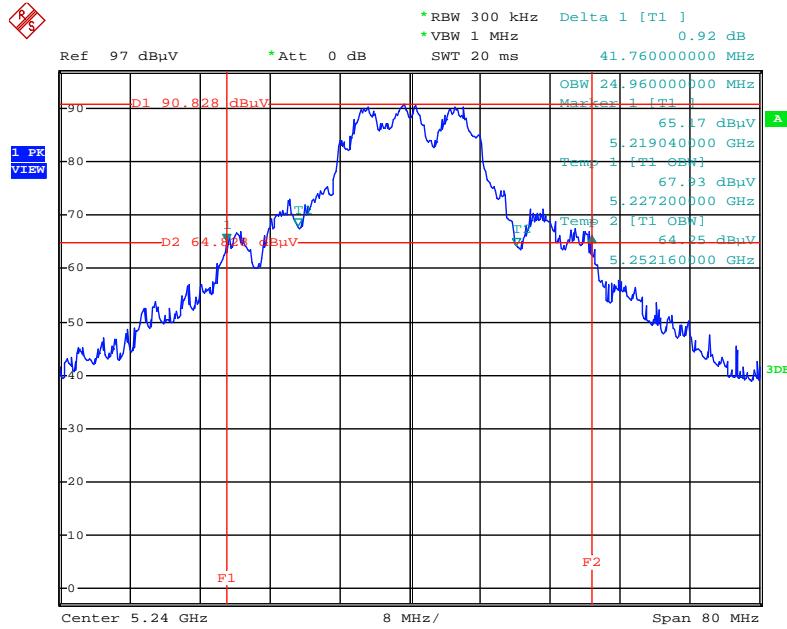

Date: 24.SEP.2014 17:12:26


For Beamforming Mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

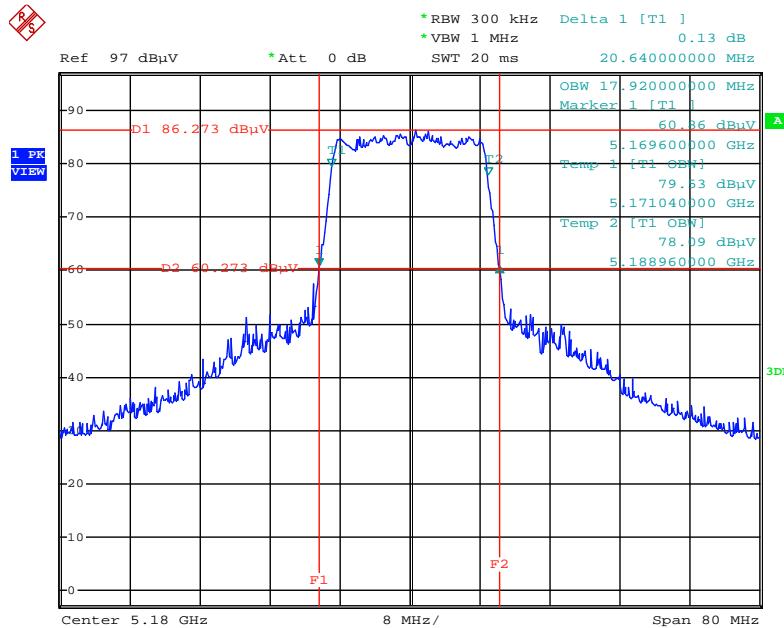


Date: 24.SEP.2014 17:24:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

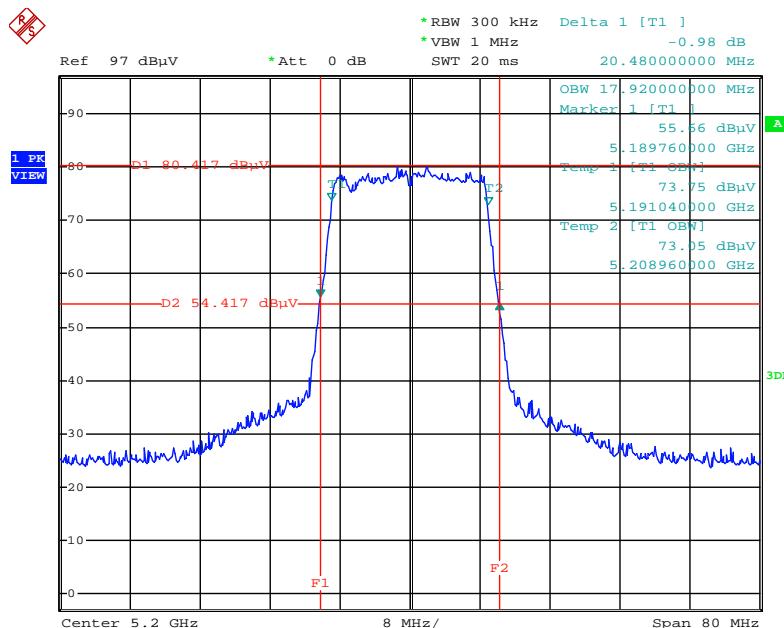


Date: 24.SEP.2014 17:24:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

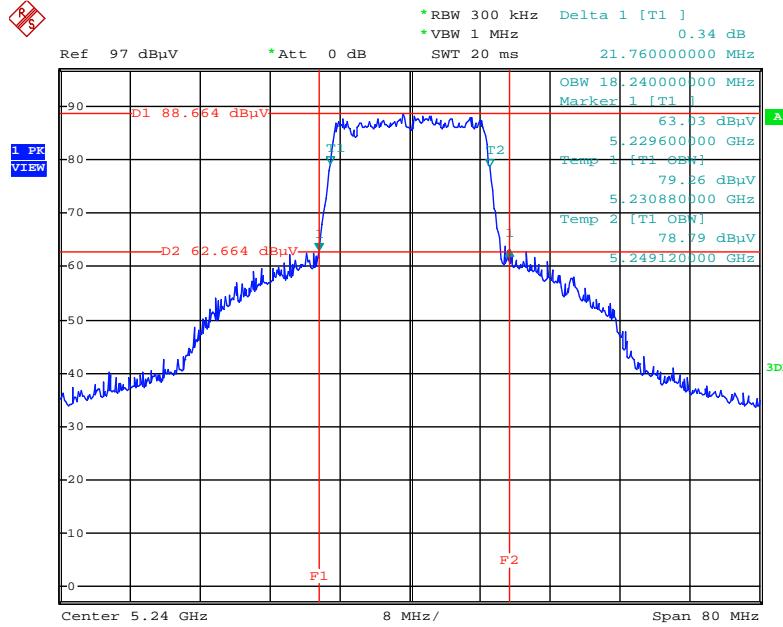


Date: 24.SEP.2014 17:26:20

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5190 MHz

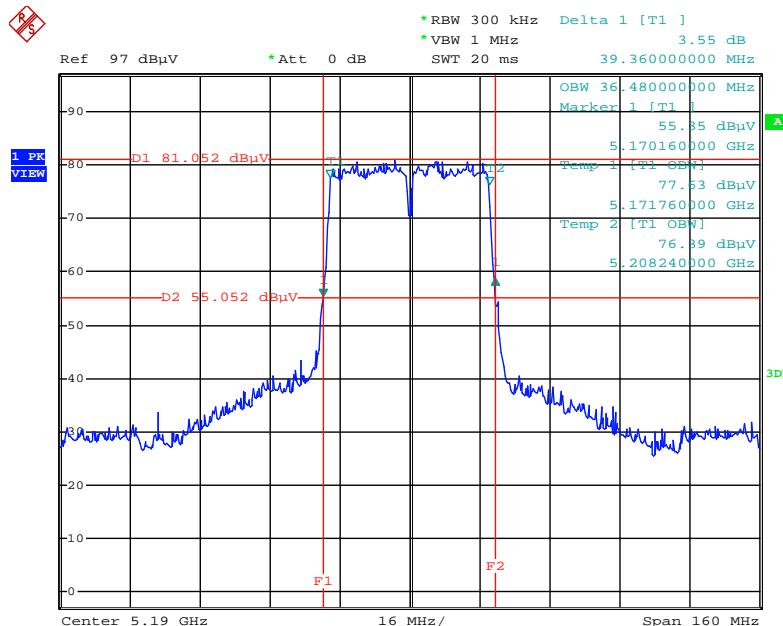


Date: 24.SEP.2014 17:28:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

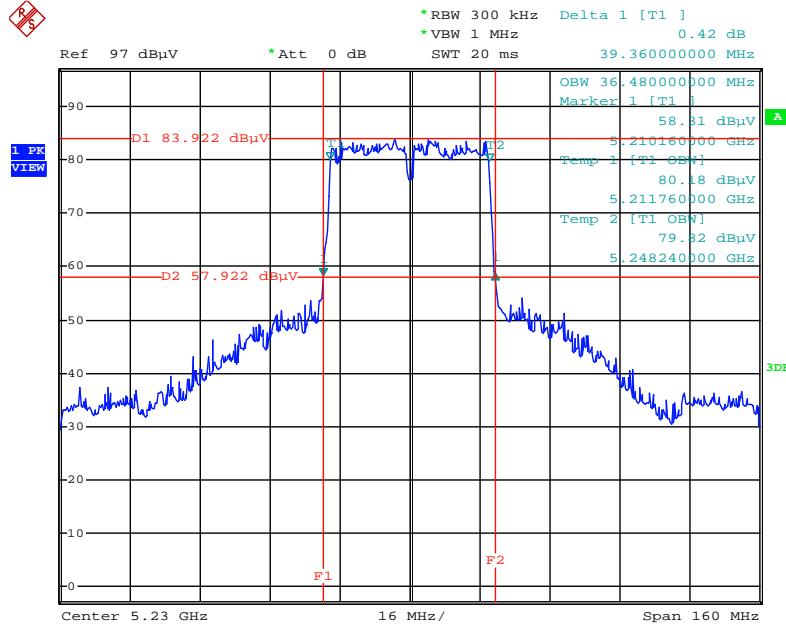

Date: 24.SEP.2014 17:29:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

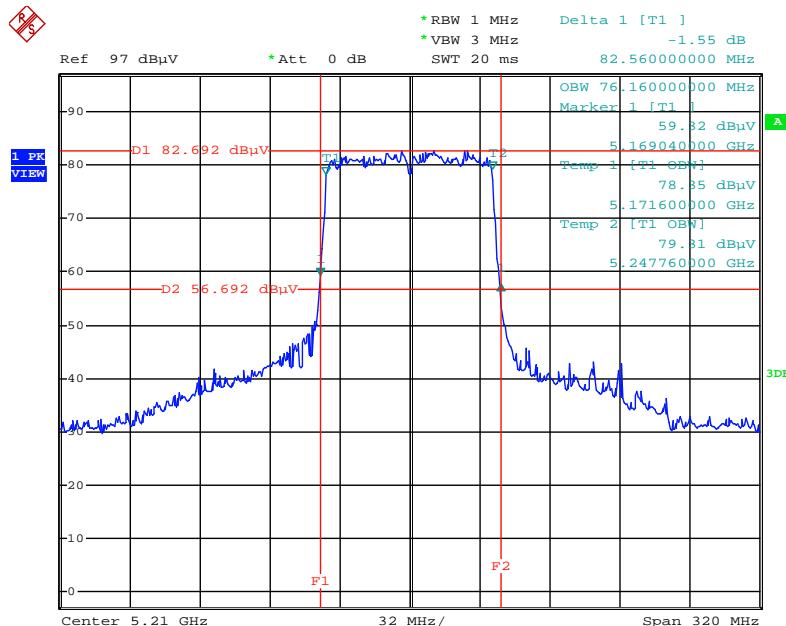

Date: 24.SEP.2014 17:29:57

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

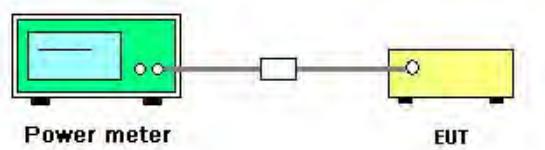

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

For Non-Beamforming Mode

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 25, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
36	5180 MHz	17.12	16.81	17.38	21.88	30.00	Complies
40	5200 MHz	14.37	14.12	14.77	19.20	30.00	Complies
48	5240 MHz	23.54	23.01	24.13	28.36	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
38	5190 MHz	14.65	14.39	15.13	19.51	30.00	Complies
46	5230 MHz	17.17	16.92	17.63	22.02	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
42	5210 MHz	12.79	12.47	13.06	17.55	30.00	Complies

Temperature	24°C	Humidity	61%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Sep. 25, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
36	5180 MHz	17.22	17.02	17.75	22.11	30.00	Complies
40	5200 MHz	13.33	13.03	13.84	18.18	30.00	Complies
48	5240 MHz	23.25	22.81	23.41	27.94	30.00	Complies

For Beamforming Mode

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 23, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
36	5180 MHz	16.32	15.61	17.17	21.18	28.23	Complies
40	5200 MHz	9.89	9.48	10.32	14.68	28.23	Complies
48	5240 MHz	18.35	17.78	19.23	23.27	28.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Power Limit = $30 - (7.77 - 6) = 28.23 \text{dBm}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
38	5190 MHz	14.29	14.01	14.98	19.22	28.23	Complies
46	5230 MHz	16.92	16.23	17.79	21.80	28.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Power Limit = $30 - (7.77 - 6) = 28.23 \text{dBm}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
42	5210 MHz	12.95	12.66	14.05	18.03	28.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Power Limit = $30 - (7.77 - 6) = 28.23 \text{dBm}$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	17

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

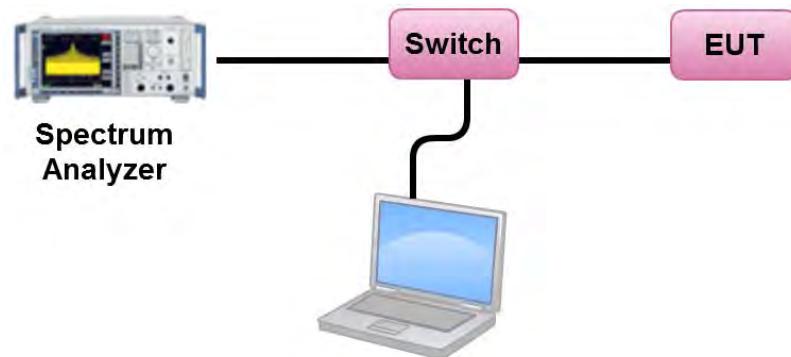

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

For Non-Beamforming Mode:

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 25, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	8.44	15.23	Complies
40	5200 MHz	6.21	15.23	Complies
48	5240 MHz	14.85	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	3.39	15.23	Complies
46	5230 MHz	5.99	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-1.82	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{dBm/MHz}$

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Sep. 25, 2014		

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	9.03	15.23	Complies
40	5200 MHz	5.09	15.23	Complies
48	5240 MHz	14.57	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{dBi} > 6 \text{dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{dBm/MHz}$

For Beamforming Mode:

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac
Test Date	Sep. 23, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	7.75	15.23	Complies
40	5200 MHz	1.52	15.23	Complies
48	5240 MHz	10.10	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{ dBi} > 6 \text{ dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{ dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	2.82	15.23	Complies
46	5230 MHz	5.69	15.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{ dBi} > 6 \text{ dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{ dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-1.33	15.23	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{ dBi} > 6 \text{ dBi}$, So Band1 Limit = $17 - (7.77 - 6) = 15.23 \text{ dBm/MHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For Non-Beamforming Mode:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

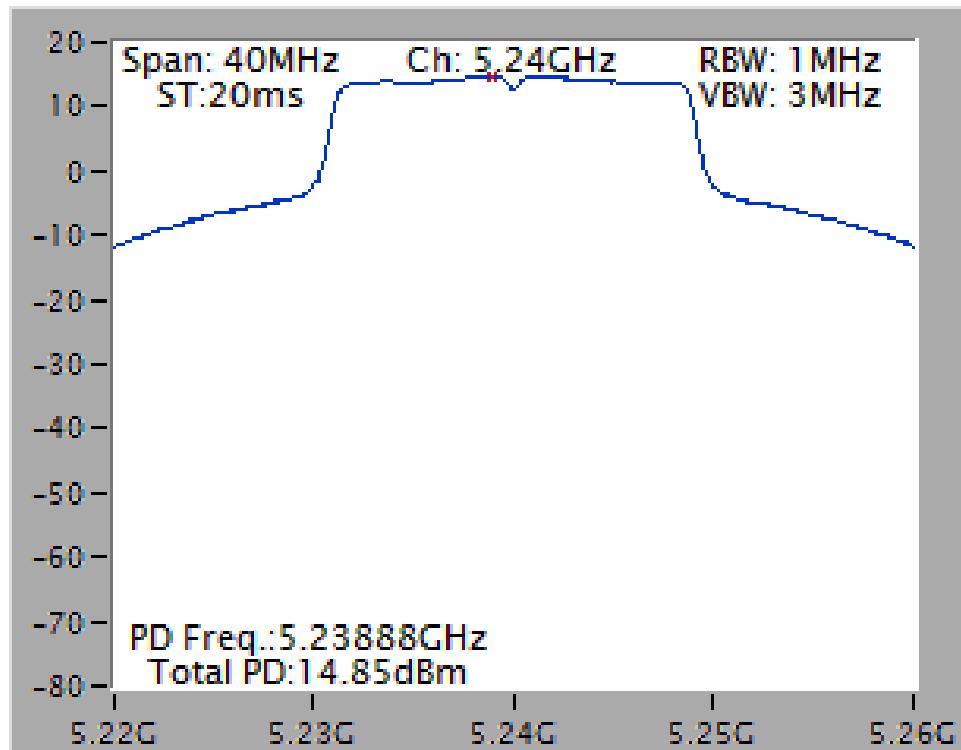


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

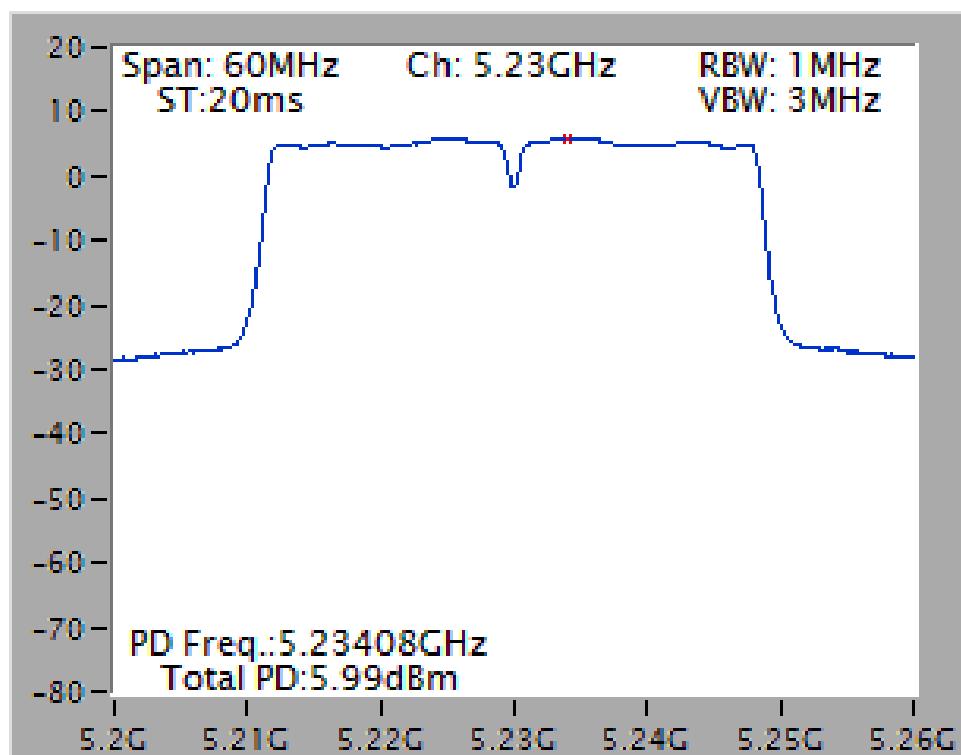

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

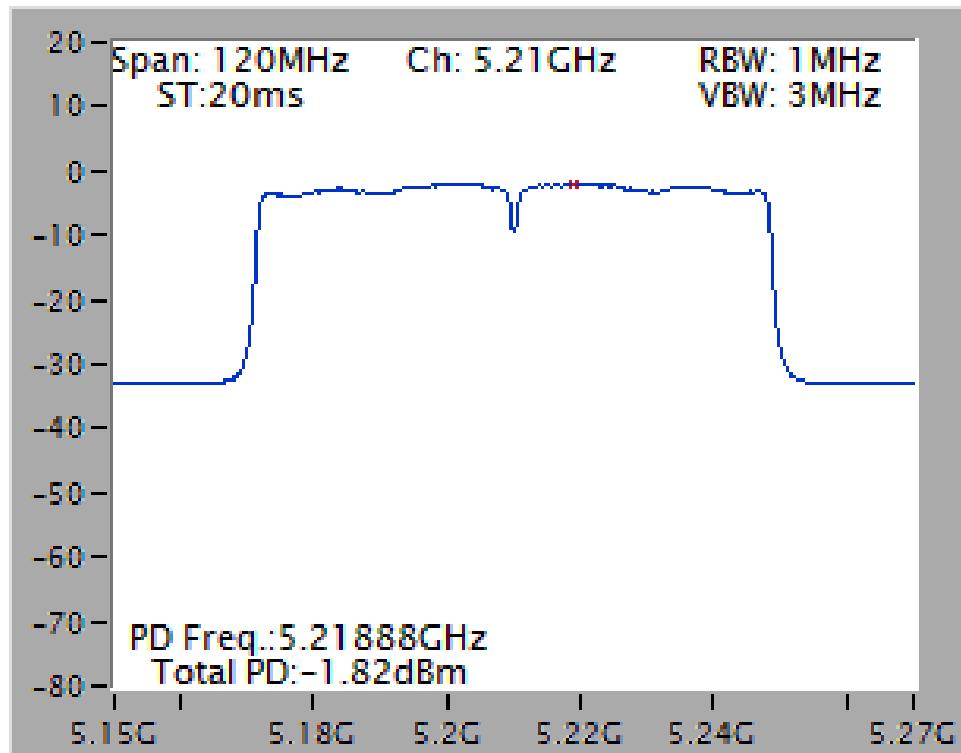


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

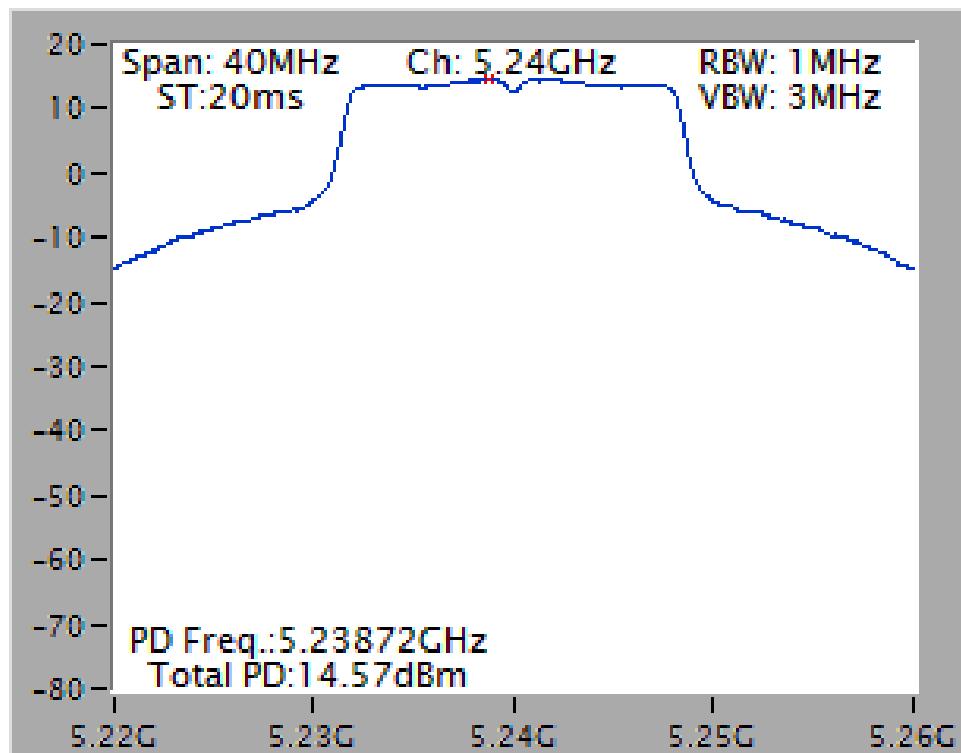


For Beamforming Mode:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

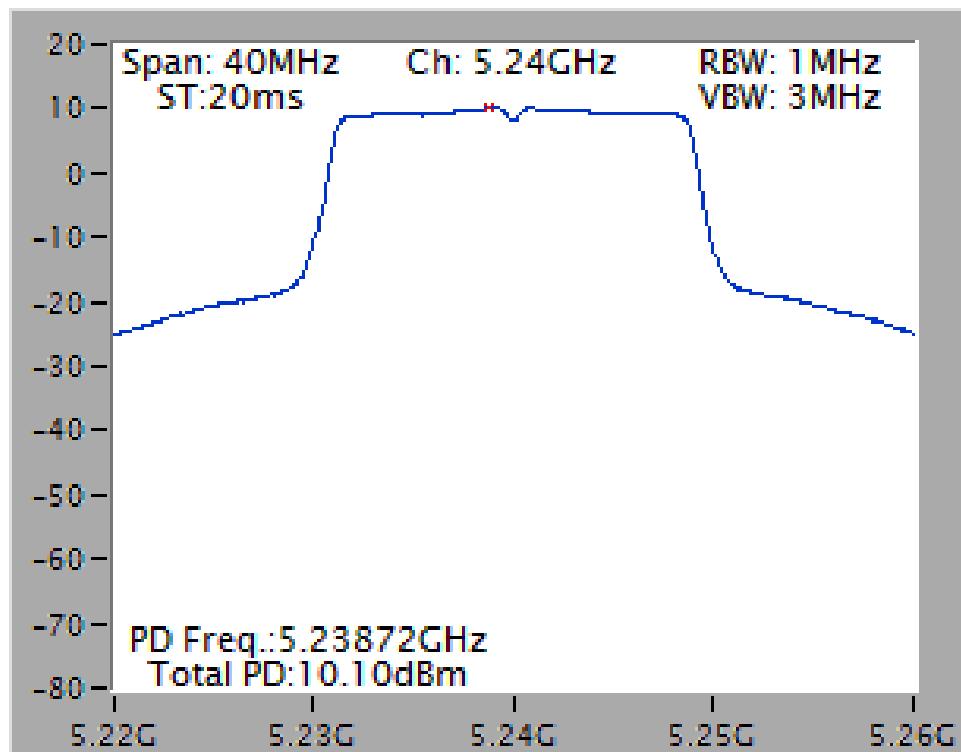

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

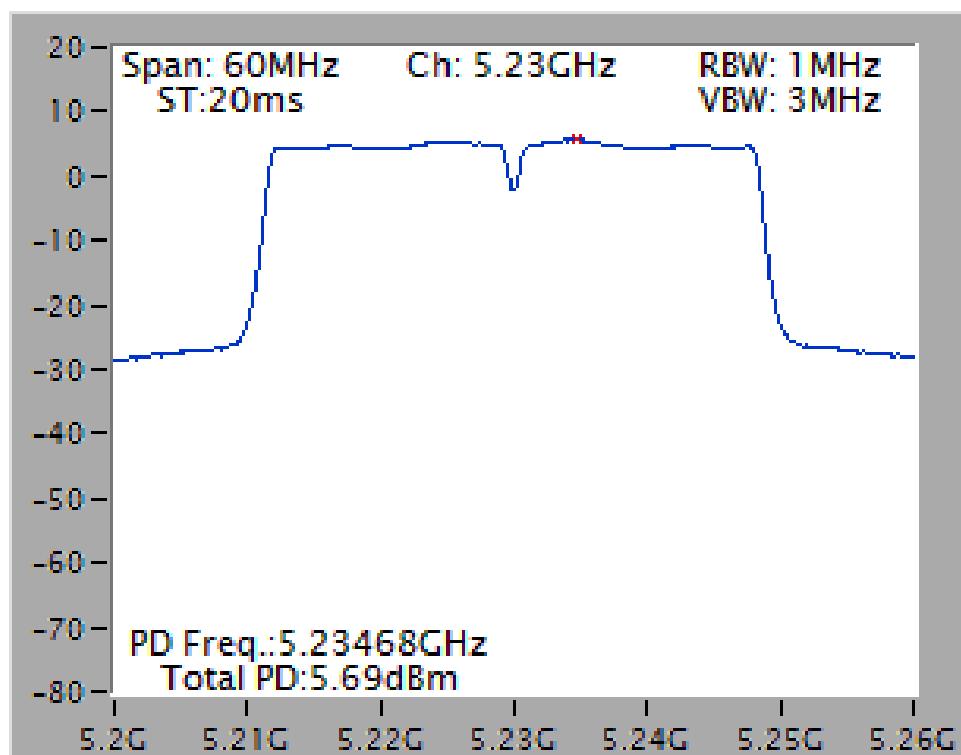

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

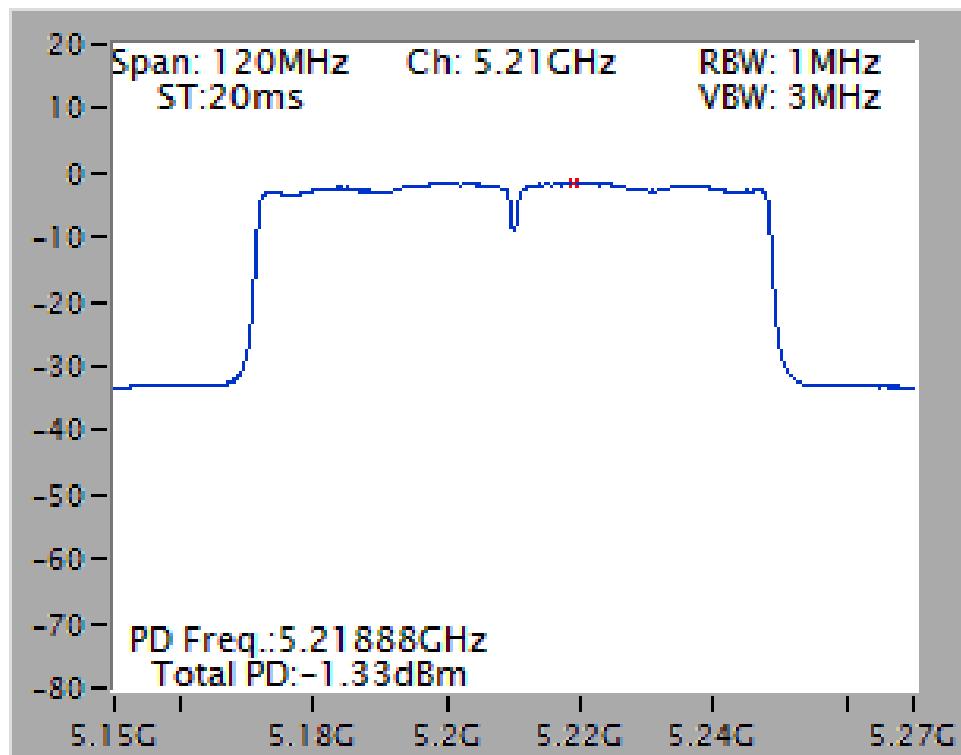

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz .

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~ 30MHz

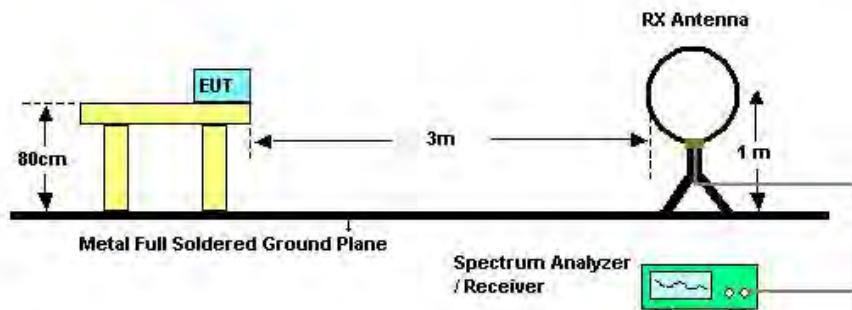

For Radiated Emissions: 30MHz~1GHz

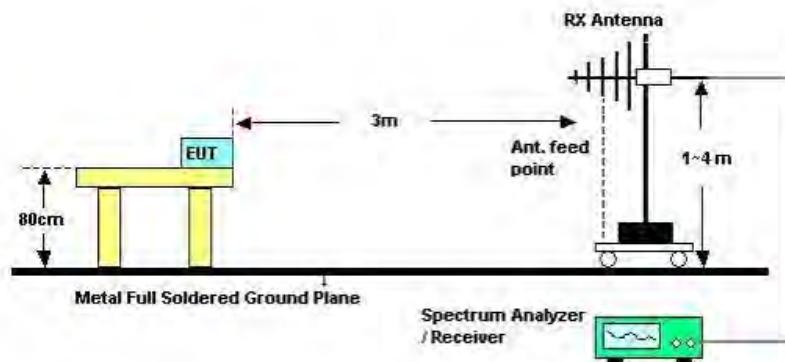

For Radiated Emissions: Above 1GHz

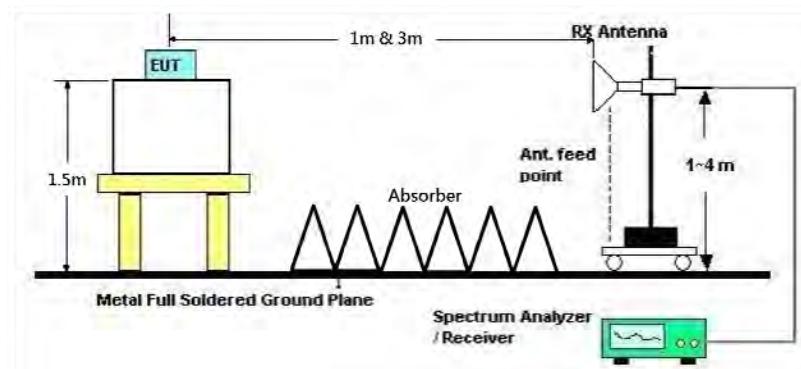

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-Beamforming Mode:

The EUT was programmed to be in continuously transmitting mode.

For Beamforming Mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Sep. 08, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Normal Link

Horizontal

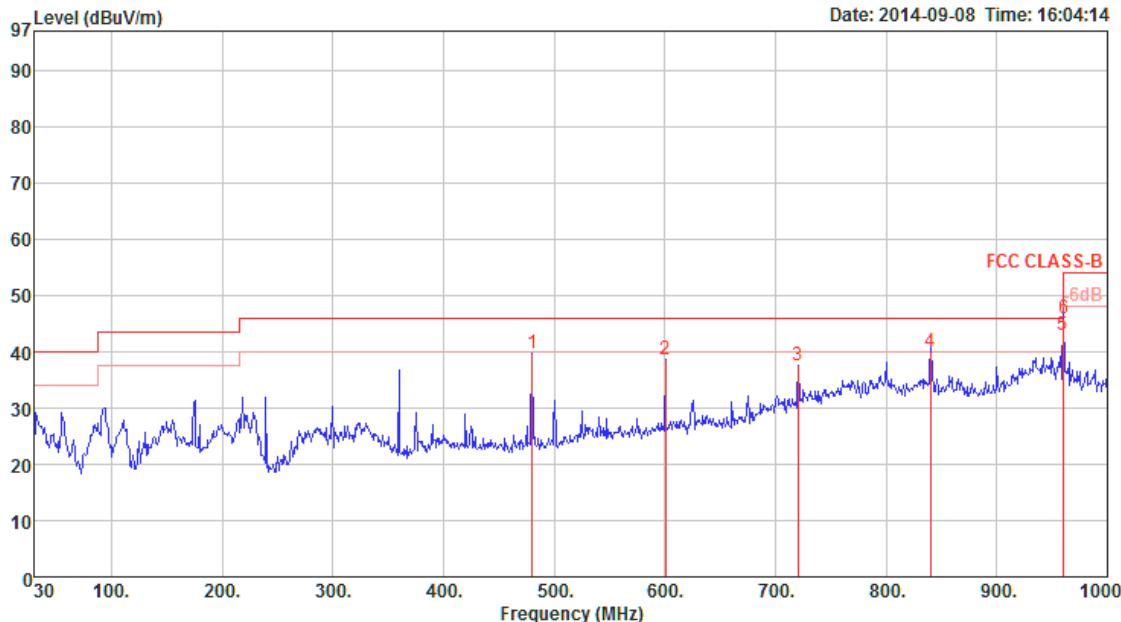

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level					
1	480.08	39.69	46.00	-6.31	48.02	2.05	17.52	27.90	Peak	0	100	HORIZONTAL
2	600.36	38.52	46.00	-7.48	44.16	2.36	19.60	27.60	Peak	0	100	HORIZONTAL
3	720.64	37.65	46.00	-8.35	41.95	2.61	20.19	27.10	Peak	0	100	HORIZONTAL
4	839.95	39.91	46.00	-6.09	42.48	2.81	21.52	26.90	QP	139	100	HORIZONTAL
5	960.00	42.85	46.00	-3.15	43.83	3.05	22.42	26.45	QP	236	100	HORIZONTAL
6	960.23	46.06	54.00	-7.94	47.04	3.05	22.42	26.45	QP	286	100	HORIZONTAL

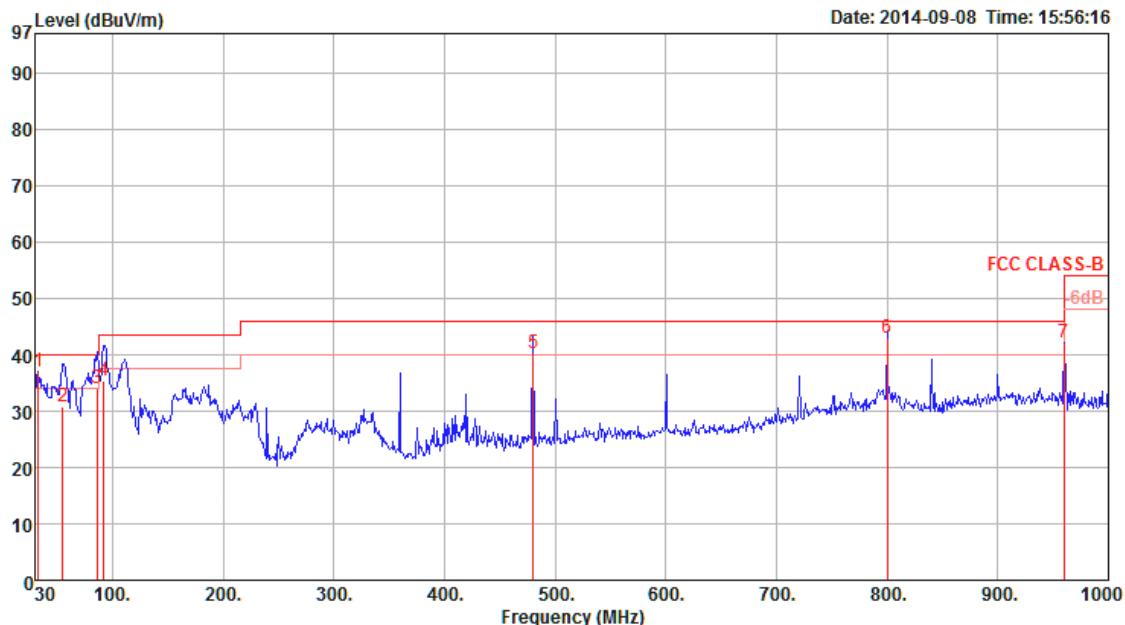Vertical


Freq	Level	Limit	Over	Read	Cable			Preamp	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	deg	cm	
1	32.91	36.94	40.00	-3.06	46.47	0.42	18.04	27.99	Peak	0	400 VERTICAL
2	55.22	30.83	40.00	-9.17	50.36	0.57	7.80	27.90	QP	101	100 VERTICAL
3	86.26	34.06	40.00	-5.94	52.50	0.77	8.68	27.89	QP	186	100 VERTICAL
4	92.08	35.29	43.50	-8.21	52.56	0.79	9.80	27.86	QP	184	100 VERTICAL
5	480.08	40.23	46.00	-5.77	48.56	2.05	17.52	27.90	QP	134	100 VERTICAL
6	800.18	42.91	46.00	-3.09	45.87	2.73	21.20	26.89	QP	345	100 VERTICAL
7	960.00	42.23	46.00	-3.77	43.21	3.05	22.42	26.45	QP	95	100 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For Non-Beamforming Mode:

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Line	Read Limit	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	15532.80	52.06	74.00	-21.94	42.65	6.13	38.45	35.17	Peak	108	250	HORIZONTAL		
2	15539.52	38.73	54.00	-15.27	29.32	6.13	38.45	35.17	Average	108	250	HORIZONTAL		

Vertical

Freq	Level	Limit		Over Line	Read Limit	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	15539.36	38.94	54.00	-15.06	29.53	6.13	38.45	35.17	Average	119	294	VERTICAL		
2	15543.80	51.71	74.00	-22.29	42.32	6.13	38.43	35.17	Peak	119	294	VERTICAL		

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	15602.44	38.80	54.00	-15.20	29.50	6.13	38.36	35.19	Average			100	209	HORIZONTAL
2	15604.04	52.01	74.00	-21.99	42.71	6.13	38.36	35.19	Peak			100	209	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	15601.92	51.76	74.00	-22.24	42.46	6.13	38.36	35.19	Peak			108	278	VERTICAL
2	15609.08	38.78	54.00	-15.22	29.48	6.13	38.36	35.19	Average			108	278	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1 15739.30	40.11	54.00	-13.89	31.03	6.14	38.16	35.22	Average		100	265	HORIZONTAL	
2 15743.70	53.02	74.00	-20.98	43.94	6.14	38.16	35.22	Peak		100	265	HORIZONTAL	

Vertical

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1 15723.70	45.60	54.00	-8.40	36.48	6.14	38.19	35.21	Average		144	217	VERTICAL	
2 15723.80	60.33	74.00	-13.67	51.21	6.14	38.19	35.21	Peak		144	217	VERTICAL	

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m					
1	10370.50	50.36	74.00	-23.64	41.79	4.97	39.01	35.41	Peak		165	256	HORIZONTAL
2	10379.80	36.05	54.00	-17.95	27.47	4.98	38.99	35.39	Average		165	256	HORIZONTAL
3	15556.30	39.04	54.00	-14.96	29.65	6.13	38.43	35.17	Average		165	261	HORIZONTAL
4	15575.20	51.43	74.00	-22.57	42.08	6.13	38.40	35.18	Peak		165	261	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m					
1	10368.10	48.77	74.00	-25.23	40.20	4.97	39.01	35.41	Peak		150	228	VERTICAL
2	10380.00	36.23	54.00	-17.77	27.65	4.98	38.99	35.39	Average		150	228	VERTICAL
3	15559.90	52.00	74.00	-22.00	42.61	6.13	38.43	35.17	Peak		156	104	VERTICAL
4	15575.00	38.87	54.00	-15.13	29.52	6.13	38.40	35.18	Average		156	104	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB						cm	deg	
1	15705.30	39.93	54.00	-14.07	30.79	6.14	38.21	35.21	Average	101	50 HORIZONTAL
2	15709.30	51.95	74.00	-22.05	42.81	6.14	38.21	35.21	Peak	101	50 HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB						cm	deg	
1	15684.50	53.21	74.00	-20.79	44.05	6.14	38.23	35.21	Peak	100	335 VERTICAL
2	15706.00	39.81	54.00	-14.19	30.67	6.14	38.21	35.21	Average	100	335 VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
		MHz	dBuV/m	dBuV/m									cm	deg
1	10420.00	35.93	54.00	-18.07	27.35	4.98	38.97	35.37	Average			150	231	HORIZONTAL
2	10423.90	48.87	74.00	-25.13	40.26	4.99	38.97	35.35	Peak			150	231	HORIZONTAL
3	15637.60	39.14	54.00	-14.86	29.88	6.14	38.31	35.19	Average			160	186	HORIZONTAL
4	15646.80	51.49	74.00	-22.51	42.26	6.14	38.28	35.19	Peak			160	186	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
		MHz	dBuV/m	dBuV/m									cm	deg
1	10406.50	48.90	74.00	-25.10	40.31	4.98	38.98	35.37	Peak			151	220	VERTICAL
2	10419.90	35.92	54.00	-18.08	27.34	4.98	38.97	35.37	Average			151	220	VERTICAL
3	15633.90	51.78	74.00	-22.22	42.52	6.14	38.31	35.19	Peak			158	30	VERTICAL
4	15639.30	39.16	54.00	-14.84	29.90	6.14	38.31	35.19	Average			158	30	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB	dB/m	dB	dB	dB	deg	cm	
1	15530.10	40.31	54.00	-13.69	28.51	7.85	38.67	34.72	Average		86	112	HORIZONTAL	
2	15535.35	54.34	74.00	-19.66	42.54	7.85	38.67	34.72	Peak		91	112	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB	dB/m	dB	dB	dB	deg	cm	
1	15537.53	40.34	54.00	-13.66	28.54	7.85	38.67	34.72	Average		250	100	VERTICAL	
2	15545.10	51.43	74.00	-22.57	39.63	7.86	38.66	34.72	Peak		250	100	VERTICAL	

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	15605.00	40.23	54.00	-13.77	28.52	7.88	38.62	34.79	Average			15	100	HORIZONTAL
2	15609.23	50.84	74.00	-23.16	39.13	7.88	38.62	34.79	Peak			10	100	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	15600.42	52.00	74.00	-22.00	40.29	7.88	38.62	34.79	Peak			146	119	VERTICAL
2	15606.83	40.29	54.00	-13.71	28.58	7.88	38.62	34.79	Average			146	119	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15716.86	40.98	54.00	-13.02	29.42	7.92	38.52	34.88	Average	215	100 HORIZONTAL
2	15729.94	52.28	74.00	-21.72	40.74	7.92	38.52	34.90	Peak	215	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15719.65	50.12	54.00	-3.88	38.56	7.92	38.52	34.88	Average	177	196 VERTICAL
2	15721.25	63.45	74.00	-10.55	51.89	7.92	38.52	34.88	Peak	177	196 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Beamforming Mode:

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	15533.43	51.08	74.00	-22.92	35.22	12.58	38.45	35.17	Peak			175	199	HORIZONTAL
2	15554.10	38.26	54.00	-15.74	22.42	12.58	38.43	35.17	Average			175	199	HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	15559.95	39.55	54.00	-14.45	23.71	12.58	38.43	35.17	Average			158	321	VERTICAL
2	15560.19	51.08	74.00	-22.92	35.24	12.58	38.43	35.17	Peak			158	321	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	15578.37	38.12	54.00	-15.88	22.34	12.58	38.38	35.18	Average			162	97	HORIZONTAL
2	15612.58	51.27	74.00	-22.73	35.55	12.58	38.33	35.19	Peak			162	97	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	15613.86	52.62	74.00	-21.38	36.90	12.58	38.33	35.19	Peak			142	48	VERTICAL
2	15624.60	39.34	54.00	-14.66	23.62	12.58	38.33	35.19	Average			142	48	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit		Over	Read	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB/m	dB				
1	15714.39	40.69	54.00	-13.31	25.14	12.57	38.19	35.21	Average	172	107	HORIZONTAL
2	15735.71	53.21	74.00	-20.79	37.70	12.57	38.16	35.22	Peak	172	107	HORIZONTAL

Vertical

Freq	Level	Limit		Over	Read	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB/m	dB				
1	15725.37	44.66	54.00	-9.34	29.11	12.57	38.19	35.21	Average	161	310	VERTICAL
2	15729.13	58.39	74.00	-15.61	42.85	12.57	38.19	35.22	Peak	161	310	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	dB	dB	cm	deg	
1	15558.70	38.36	54.00	-15.64	22.52	12.58	38.43	35.17	Average		163	166	HORIZONTAL
2	15570.80	50.78	74.00	-23.22	34.97	12.58	38.40	35.17	Peak		163	166	HORIZONTAL

Vertical

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	dB	dB	cm	deg	
1	15564.31	51.42	74.00	-22.58	35.61	12.58	38.40	35.17	Peak		183	70	VERTICAL
2	15573.85	38.49	54.00	-15.51	22.69	12.58	38.40	35.18	Average		183	70	VERTICAL

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	15685.43	51.71	74.00	-22.29	36.11	12.58	38.23	35.21	Peak		181	48	HORIZONTAL	
2	15702.42	39.46	54.00	-14.54	23.89	12.57	38.21	35.21	Average		181	48	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	15693.21	50.98	74.00	-23.02	35.38	12.58	38.23	35.21	Peak		166	53	VERTICAL	
2	15704.74	39.62	54.00	-14.38	24.05	12.57	38.21	35.21	Average		166	53	VERTICAL	

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Horizontal

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	15649.79	51.12	74.00	-22.88	35.46	12.58	38.28	35.20	Peak	175	324 HORIZONTAL
2	15653.96	38.49	54.00	-15.51	22.83	12.58	38.28	35.20	Average	175	324 HORIZONTAL

Vertical

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	15619.98	38.63	54.00	-15.37	22.91	12.58	38.33	35.19	Average	166	70 VERTICAL
2	15636.33	52.29	74.00	-21.71	36.59	12.58	38.31	35.19	Peak	166	70 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz .

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For Non-Beamforming Mode:

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg
1	5099.00	52.92	54.00	-1.08	50.36	3.42	34.04	34.90	Average		206	251	VERTICAL
2	5148.00	65.17	74.00	-8.83	62.54	3.43	34.11	34.91	Peak		206	251	VERTICAL
3	5179.00	105.20			102.51	3.44	34.16	34.91	Average		206	251	VERTICAL
4	5179.00	115.76			113.07	3.44	34.16	34.91	Peak		206	251	VERTICAL
5	5350.00	47.78	54.00	-6.22	44.81	3.49	34.39	34.91	Average		206	251	VERTICAL
6	5350.00	58.33	74.00	-15.67	55.36	3.49	34.39	34.91	Peak		206	251	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg
1	5120.00	52.78	54.00	-1.22	50.20	3.43	34.06	34.91	Average		160	49	VERTICAL
2	5121.00	62.84	74.00	-11.16	60.26	3.43	34.06	34.91	Peak		160	49	VERTICAL
3	5196.00	112.16			109.44	3.45	34.18	34.91	Peak		160	49	VERTICAL
4	5201.00	102.21			99.49	3.45	34.18	34.91	Average		160	49	VERTICAL
5	5356.00	47.68	54.00	-6.32	44.71	3.49	34.39	34.91	Average		160	49	VERTICAL
6	5361.00	59.23	74.00	-14.77	56.24	3.49	34.41	34.91	Peak		160	49	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB					
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg
1	5080.00	51.71	54.00	-2.29	49.18	3.41	34.02	34.90	Average		158	50	VERTICAL
2	5085.00	62.22	74.00	-11.78	59.69	3.41	34.02	34.90	Peak		158	50	VERTICAL
3	5241.00	109.28			106.50	3.46	34.23	34.91	Average		158	50	VERTICAL
4	5241.00	119.78			117.00	3.46	34.23	34.91	Peak		158	50	VERTICAL
5	5401.00	52.65	54.00	-1.35	49.60	3.51	34.46	34.92	Average		158	50	VERTICAL
6	5401.00	62.89	74.00	-11.11	59.84	3.51	34.46	34.92	Peak		158	50	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Channel 38

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	5146.00	66.76	74.00	-7.24	64.13	3.43	34.11	34.91	Peak		158	49	VERTICAL
2	5150.00	52.96	54.00	-1.04	50.33	3.43	34.11	34.91	Average		158	49	VERTICAL
3	5195.60	98.73			96.01	3.45	34.18	34.91	Average		158	49	VERTICAL
4	5195.60	109.92			107.20	3.45	34.18	34.91	Peak		158	49	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	5146.00	52.98	54.00	-1.02	50.35	3.43	34.11	34.91	Average		236	265	VERTICAL
2	5146.00	63.79	74.00	-10.21	61.16	3.43	34.11	34.91	Peak		236	265	VERTICAL
3	5241.20	103.19			100.41	3.46	34.23	34.91	Average		236	265	VERTICAL
4	5241.20	115.10			112.32	3.46	34.23	34.91	Peak		236	265	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Channel 42

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	5146.80	52.98	54.00	-1.02	50.35	3.43	34.11	34.91	Average	229	231 VERTICAL
2	5146.80	68.89	74.00	-5.11	66.26	3.43	34.11	34.91	Peak	229	231 VERTICAL
3	5212.40	107.96			105.22	3.45	34.20	34.91	Peak	229	231 VERTICAL
4	5217.20	94.56			91.82	3.45	34.20	34.91	Average	229	231 VERTICAL
5	5352.40	46.39	54.00	-7.61	43.42	3.49	34.39	34.91	Average	229	231 VERTICAL
6	5358.00	58.26	74.00	-15.74	55.29	3.49	34.39	34.91	Peak	229	231 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5102.00	52.74	54.00	-1.26	50.18	3.42	34.04	34.90	Average		207	259	VERTICAL
2	5147.00	67.81	74.00	-6.19	65.18	3.43	34.11	34.91	Peak		207	259	VERTICAL
3	5182.00	106.01			103.32	3.44	34.16	34.91	Average		207	259	VERTICAL
4	5182.00	116.42			113.73	3.44	34.16	34.91	Peak		207	259	VERTICAL
5	5395.00	46.77	54.00	-7.23	43.73	3.50	34.46	34.92	Average		207	259	VERTICAL
6	5414.00	58.36	74.00	-15.64	55.29	3.51	34.48	34.92	Peak		207	259	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5118.00	64.11	74.00	-9.89	61.53	3.42	34.06	34.90	Peak		234	225	VERTICAL
2	5128.00	52.71	54.00	-1.29	50.10	3.43	34.09	34.91	Average		234	225	VERTICAL
3	5198.00	103.65			100.93	3.45	34.18	34.91	Average		234	225	VERTICAL
4	5198.00	114.08			111.36	3.45	34.18	34.91	Peak		234	225	VERTICAL
5	5359.00	48.40	54.00	-5.60	45.43	3.49	34.39	34.91	Average		234	225	VERTICAL
6	5359.00	60.82	74.00	-13.18	57.85	3.49	34.39	34.91	Peak		234	225	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5072.00	61.39	74.00	-12.61	58.86	3.41	34.02	34.90	Peak		160	57	VERTICAL
2	5081.00	50.72	54.00	-3.28	48.19	3.41	34.02	34.90	Average		160	57	VERTICAL
3	5242.00	110.52			107.72	3.46	34.25	34.91	Average		160	57	VERTICAL
4	5242.00	121.29			118.49	3.46	34.25	34.91	Peak		160	57	VERTICAL
5	5403.00	52.78	54.00	-1.22	49.73	3.51	34.46	34.92	Average		160	57	VERTICAL
6	5404.00	63.52	74.00	-10.48	60.47	3.51	34.46	34.92	Peak		160	57	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

For Beamforming Mode:

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5101.12	52.80	54.00	-1.20	47.52	6.14	34.04	34.90	Average		174	272	VERTICAL
2	5150.00	66.02	74.00	-7.98	60.61	6.21	34.11	34.91	Peak		174	272	VERTICAL
3	5182.40	106.98			101.49	6.24	34.16	34.91	Average		174	272	VERTICAL
4	5183.21	116.69			111.20	6.24	34.16	34.91	Peak		174	272	VERTICAL
5	5350.00	57.82	74.00	-16.18	51.87	6.47	34.39	34.91	Peak		174	272	VERTICAL
6	5396.47	46.49	54.00	-7.51	40.45	6.50	34.46	34.92	Average		174	272	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5111.54	52.83	54.00	-1.17	47.53	6.14	34.06	34.90	Average		233	293	VERTICAL
2	5111.54	62.92	74.00	-11.08	57.62	6.14	34.06	34.90	Peak		233	293	VERTICAL
3	5208.01	102.20			96.64	6.27	34.20	34.91	Average		233	293	VERTICAL
4	5208.01	111.37			105.81	6.27	34.20	34.91	Peak		233	293	VERTICAL
5	5353.21	47.50	54.00	-6.50	41.55	6.47	34.39	34.91	Average		233	293	VERTICAL
6	5354.81	58.42	74.00	-15.58	52.47	6.47	34.39	34.91	Peak		233	293	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5081.09	48.94	54.00	-5.06	43.71	6.11	34.02	34.90	Average		176	273	VERTICAL
2	5084.30	60.26	74.00	-13.74	55.03	6.11	34.02	34.90	Peak		176	273	VERTICAL
3	5241.60	109.69			104.05	6.30	34.25	34.91	Average		176	273	VERTICAL
4	5243.21	120.00			114.36	6.30	34.25	34.91	Peak		176	273	VERTICAL
5	5395.67	63.98	74.00	-10.02	57.94	6.50	34.46	34.92	Peak		176	273	VERTICAL
6	5398.08	52.87	54.00	-1.13	46.83	6.50	34.46	34.92	Average		176	273	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 11, 2014		

Channel 38

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5140.39	71.67	74.00	-2.33	66.30	6.17	34.11	34.91	Peak		235	274	VERTICAL
2	5146.80	52.78	54.00	-1.22	47.37	6.21	34.11	34.91	Average		235	274	VERTICAL
3	5207.63	101.58			96.02	6.27	34.20	34.91	Average		235	274	VERTICAL
4	5207.63	110.59			105.03	6.27	34.20	34.91	Peak		235	274	VERTICAL
5	5363.62	56.45	74.00	-17.55	50.48	6.47	34.41	34.91	Peak		235	274	VERTICAL
6	5367.63	46.69	54.00	-7.31	40.72	6.47	34.41	34.91	Average		235	274	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	5145.19	52.61	54.00	-1.39	47.20	6.21	34.11	34.91	Average		166	54	VERTICAL
2	5148.40	63.17	74.00	-10.83	57.76	6.21	34.11	34.91	Peak		166	54	VERTICAL
3	5234.01	104.42			98.80	6.30	34.23	34.91	Average		166	54	VERTICAL
4	5235.61	113.94			108.32	6.30	34.23	34.91	Peak		166	54	VERTICAL
5	5397.28	59.24	74.00	-14.76	53.20	6.50	34.46	34.92	Peak		166	54	VERTICAL
6	5407.69	48.17	54.00	-5.83	42.10	6.53	34.46	34.92	Average		166	54	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Sep. 03, 2014		

Channel 42

Freq	Level	Limit		Over	Read	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor			
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	
										cm	deg
1	5146.80	52.97	54.00	-1.03	47.56	6.21	34.11	34.91	Average	166	66 VERTICAL
2	5147.60	66.95	74.00	-7.05	61.54	6.21	34.11	34.91	Peak	166	66 VERTICAL
3	5214.81	107.60			102.04	6.27	34.20	34.91	Peak	166	66 VERTICAL
4	5217.21	97.66			92.10	6.27	34.20	34.91	Average	166	66 VERTICAL
5	5358.01	58.07	74.00	-15.93	52.12	6.47	34.39	34.91	Peak	166	66 VERTICAL
6	5359.62	45.79	54.00	-8.21	39.84	6.47	34.39	34.91	Average	166	66 VERTICAL

Item 4, 5 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

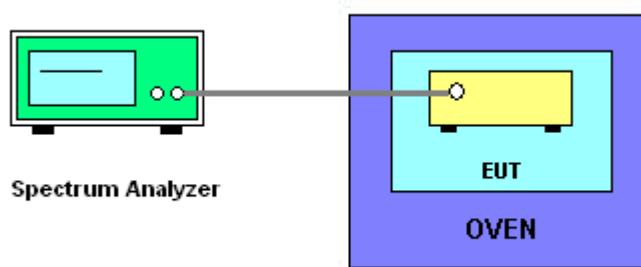

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	24°C	Humidity	63%
Test Engineer	Jim Huang	Test Date	Sep. 25, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9922
110.00	5199.9958
93.50	5199.9976
Max. Deviation (MHz)	0.007800
Max. Deviation (ppm)	1.50

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9864
10	5199.9908
20	5199.9958
30	5199.9982
40	5200.0036
Max. Deviation (MHz)	0.013600
Max. Deviation (ppm)	2.62

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 30, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 30, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

** Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%