

# FCC Radio Test Report

**FCC ID: G95-EWA1230**

**This report concerns: Class II Permissive Change**

|                        |                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Project No.</b>     | : 2103C023A                                                                                                                                                                             |
| <b>Equipment</b>       | : Dual Band Wi-Fi 6 Ethernet Gateway                                                                                                                                                    |
| <b>Brand Name</b>      | : technicolor, Google Fiber                                                                                                                                                             |
| <b>Model Name</b>      | : EWA1230GFR, GRAX210T                                                                                                                                                                  |
| <b>Series Model</b>    | : EWA1230xyz (x/y/z stands or A~Z)                                                                                                                                                      |
| <b>Applicant</b>       | : Technicolor Connected Home USA LLC                                                                                                                                                    |
| <b>Address</b>         | : 5030 Sugarloaf Parkway Building 6, Lawrenceville Georgia, United States                                                                                                               |
| <b>Manufacturer</b>    | : Technicolor Delivery Technologies                                                                                                                                                     |
| <b>Address</b>         | : 8-10 rue du Renard, 75004 Paris, France                                                                                                                                               |
| <b>Date of Receipt</b> | : Mar. 02, 2021<br>May 12, 2021                                                                                                                                                         |
| <b>Date of Test</b>    | : Mar. 03, 2021 ~ Apr. 25, 2021                                                                                                                                                         |
| <b>Issued Date</b>     | : Jun. 08, 2021                                                                                                                                                                         |
| <b>Report Version</b>  | : R00                                                                                                                                                                                   |
| <b>Test Sample</b>     | : Engineering Sample No.: DG202103032 for conducted, DG202103033 for radiated.                                                                                                          |
| <b>Standard(s)</b>     | : FCC CFR Title 47, Part 15, Subpart E<br>FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01<br>FCC KDB 662911 D01 Multiple Transmitter Output v02r01<br>ANSI C63.10-2013 |

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

chella Zheng

**Prepared by : Chella Zheng**

John Ma

**Approved by : Ethan Ma**



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: [www.newbtl.com](http://www.newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>5</b>    |
| <b>1 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 1.1 TEST FACILITY                                            | 7           |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| 1.3 TEST ENVIRONMENT CONDITIONS                              | 8           |
| <b>2 . GENERAL INFORMATION</b>                               | <b>9</b>    |
| 2.1 GENERAL DESCRIPTION OF EUT                               | 9           |
| 2.2 TEST MODES                                               | 13          |
| 2.3 PARAMETERS OF TEST SOFTWARE                              | 19          |
| 2.4 DUTY CYCLE                                               | 21          |
| 2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 25          |
| 2.6 SUPPORT UNITS                                            | 25          |
| <b>3 . AC POWER LINE CONDUCTED EMISSIONS</b>                 | <b>26</b>   |
| 3.1 LIMIT                                                    | 26          |
| 3.2 TEST PROCEDURE                                           | 26          |
| 3.3 DEVIATION FROM TEST STANDARD                             | 26          |
| 3.4 TEST SETUP                                               | 27          |
| 3.5 EUT OPERATION CONDITIONS                                 | 27          |
| 3.6 TEST RESULTS                                             | 27          |
| <b>4 . RADIATED EMISSIONS</b>                                | <b>28</b>   |
| 4.1 LIMIT                                                    | 28          |
| 4.2 TEST PROCEDURE                                           | 29          |
| 4.3 DEVIATION FROM TEST STANDARD                             | 30          |
| 4.4 TEST SETUP                                               | 30          |
| 4.5 EUT OPERATION CONDITIONS                                 | 31          |
| 4.6 TEST RESULTS - 9 KHZ TO 30 MHZ                           | 31          |
| 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 31          |
| 4.8 TEST RESULTS - ABOVE 1000 MHZ                            | 31          |
| <b>5 . BANDWIDTH</b>                                         | <b>32</b>   |
| 5.1 LIMIT                                                    | 32          |
| 5.2 TEST PROCEDURE                                           | 32          |
| 5.3 DEVIATION FROM STANDARD                                  | 32          |
| 5.4 TEST SETUP                                               | 32          |

| <b>Table of Contents</b>                                   | <b>Page</b> |
|------------------------------------------------------------|-------------|
| 5.5 EUT OPERATION CONDITIONS                               | 32          |
| 5.6 TEST RESULTS                                           | 32          |
| <b>6 . MAXIMUM OUTPUT POWER</b>                            | <b>33</b>   |
| 6.1 LIMIT                                                  | 33          |
| 6.2 TEST PROCEDURE                                         | 33          |
| 6.3 DEVIATION FROM STANDARD                                | 33          |
| 6.4 TEST SETUP                                             | 33          |
| 6.5 EUT OPERATION CONDITIONS                               | 33          |
| 6.6 TEST RESULTS                                           | 33          |
| <b>7 . POWER SPECTRAL DENSITY</b>                          | <b>34</b>   |
| 7.1 LIMIT                                                  | 34          |
| 7.2 TEST PROCEDURE                                         | 34          |
| 7.3 DEVIATION FROM STANDARD                                | 34          |
| 7.4 TEST SETUP                                             | 34          |
| 7.5 EUT OPERATION CONDITIONS                               | 34          |
| 7.6 TEST RESULTS                                           | 34          |
| <b>8 . FREQUENCY STABILITY</b>                             | <b>35</b>   |
| 8.1 LIMIT                                                  | 35          |
| 8.2 TEST PROCEDURE                                         | 35          |
| 8.3 DEVIATION FROM STANDARD                                | 35          |
| 8.4 TEST SETUP                                             | 35          |
| 8.5 EUT OPERATION CONDITIONS                               | 35          |
| 8.6 TEST RESULTS                                           | 35          |
| <b>9 . MEASUREMENT INSTRUMENTS LIST</b>                    | <b>36</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>      | <b>38</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>    | <b>41</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b> | <b>46</b>   |
| <b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>     | <b>49</b>   |
| <b>APPENDIX E - BANDWIDTH</b>                              | <b>330</b>  |
| <b>APPENDIX F - MAXIMUM OUTPUT POWER</b>                   | <b>349</b>  |
| <b>APPENDIX G - POWER SPECTRAL DENSITY</b>                 | <b>392</b>  |
| <b>APPENDIX H - FREQUENCY STABILITY</b>                    | <b>475</b>  |

### REPORT ISSUED HISTORY

| Report Version | Description                                                                                                                                                                                                                           | Issued Date   |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| R00            | Compared with original report (BTL-FCCP-2-2103C023), added operation frequency bands: UNII-2A & UNII-2C, so all test items are tested for UNII-2A and UNII-2C. In this report only recorded the test results for UNII-2A and UNII-2C. | Jun. 08, 2021 |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart E |                                        |                                        |          |          |
|--------------------------------------|----------------------------------------|----------------------------------------|----------|----------|
| Standard(s)<br>Section               | Test Item                              | Test Result                            | Judgment | Remark   |
| 15.207<br>15.407(b)                  | AC Power Line Conducted Emissions      | APPENDIX A                             | PASS     | -----    |
| 15.407(b)<br>15.205(a)<br>15.209(a)  | Radiated Emissions                     | APPENDIX B<br>APPENDIX C<br>APPENDIX D | PASS     | -----    |
| 15.407(a)<br>15.407(e)               | Bandwidth                              | APPENDIX E                             | PASS     | -----    |
| 15.407(a)                            | Maximum Output Power                   | APPENDIX F                             | PASS     | -----    |
| 15.407(a)                            | Power Spectral Density                 | APPENDIX G                             | PASS     | -----    |
| 15.407(g)                            | Frequency Stability                    | APPENDIX H                             | PASS     | -----    |
| 15.203                               | Antenna Requirements                   | -----                                  | PASS     | NOTE (2) |
| 15.407(c)                            | Automatically Discontinue Transmission | -----                                  | PASS     | NOTE (3) |

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150kHz ~ 30MHz              | 2.68    |

### B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------|--------|-----------------------------|---------------|---------|
| DG-CB03   | CISPR  | 9kHz ~ 30MHz                | -             | 3.02    |
|           |        | 30MHz ~ 200MHz              | V             | 4.26    |
|           |        | 30MHz ~ 200MHz              | H             | 3.38    |
|           |        | 200MHz ~ 1,000MHz           | V             | 3.98    |
|           |        | 200MHz ~ 1,000MHz           | H             | 3.94    |
|           |        | 1GHz ~ 6GHz                 | -             | 3.96    |
|           |        | 6GHz ~ 18GHz                | -             | 5.24    |
|           |        | 18GHz ~ 26.5GHz             | -             | 3.62    |
|           |        | 26.5GHz ~ 40GHz             | -             | 4.00    |

### C. Other Measurement test:

| Test Item              | Uncertainty |
|------------------------|-------------|
| Bandwidth              | ±3.8 %      |
| Maximum Output Power   | ±0.95 dB    |
| Power Spectral Density | ±0.86 dB    |
| Frequency Stability    | ±0.16 dB    |
| Temperature            | ±0.08 °C    |
| Humidity               | ±1.5%       |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

| Test Item                           | Temperature      | Humidity | Test Voltage     | Tested By   |
|-------------------------------------|------------------|----------|------------------|-------------|
| AC Power Line Conducted Emissions   | 25°C             | 53%      | AC 240V/50Hz     | Hand Huang  |
| Radiated Emissions-9kHz to 30MHz    | 25°C             | 60%      | AC 120V/60Hz     | Hayden Chen |
| Radiated Emissions-30MHz to 1000MHz | 26°C             | 52%      | AC 120V/60Hz     | Hayden Chen |
| Radiated Emissions-Above 1000 MHz   | 26°C             | 52%      | AC 120V/60Hz     | Grani Zhou  |
| Bandwidth                           | 25°C             | 51%      | DC 12V           | Jesse Wang  |
| Maximum Output Power                | 25°C             | 51%      | DC 12V           | Hand Huang  |
| Power Spectral Density              | 25°C             | 51%      | DC 12V           | Jesse Wang  |
| Frequency Stability                 | Normal & Extreme | 51%      | Normal & Extreme | Jesse Wang  |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                                                 |                                                                                                                                                                                                                                                      |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                                       | Dual Band Wi-Fi 6 Ethernet Gateway                                                                                                                                                                                                                   |
| Brand Name                                      | technicolor, Google Fiber                                                                                                                                                                                                                            |
| Model Name                                      | EWA1230GFR, GRAX210T                                                                                                                                                                                                                                 |
| Series Model                                    | EWA1230xyz (x/y/z stands or A~Z)                                                                                                                                                                                                                     |
| Model Difference(s)                             | 1# For EWA1230GFR and EWA1230xyz (x/y/z stands or A~Z):<br>All models are identical and xyz changes represent different country distributions for marketing purpose.<br>2# For EWA1230GFR and GRAX210T:<br>Only differ in model name and brand name. |
| Product Code                                    | EWA1230                                                                                                                                                                                                                                              |
| HW                                              | LAB4                                                                                                                                                                                                                                                 |
| PCB Version                                     | V0.1                                                                                                                                                                                                                                                 |
| SW                                              | 19.4.0528                                                                                                                                                                                                                                            |
| Power Source                                    | DC voltage supplied from AC adapter.<br>Model: ADS-24FUA-12 12024EPCU                                                                                                                                                                                |
| Power Rating                                    | I/P: 100-240V ~50/60Hz Max. 0.7A    O/P: 12V  2.0A                                                                                                                |
| Operation Frequency Band(s)                     | UNII-2A: 5250 MHz ~ 5350 MHz<br>UNII-2C: 5470 MHz ~ 5725 MHz                                                                                                                                                                                         |
| Modulation Type                                 | IEEE 802.11a/n/ac: OFDM<br>IEEE 802.11ax: OFDMA                                                                                                                                                                                                      |
| Bit Rate of Transmitter                         | IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps<br>IEEE 802.11n: up to 600 Mbps<br>IEEE 802.11ac: up to 3466.8 Mbps<br>IEEE 802.11ax: up to 4804 Mbps                                                                                                       |
| Maximum Output Power<br>UNII-2A Non Beamforming | IEEE 802.11ac(VHT40): 23.96 dBm (0.2487 W)                                                                                                                                                                                                           |
| Maximum Output Power<br>UNII-2C Non Beamforming | IEEE 802.11ac(VHT80): 23.97 dBm (0.2495 W)                                                                                                                                                                                                           |
| Maximum Output Power<br>UNII-2A Beamforming     | IEEE 802.11ax(HE80): 23.14 dBm (0.2061 W)                                                                                                                                                                                                            |
| Maximum Output Power<br>UNII-2C Beamforming     | IEEE 802.11ax(HE80): 23.12 dBm (0.2051 W)                                                                                                                                                                                                            |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

| IEEE 802.11a<br>IEEE 802.11n(HT20)<br>IEEE 802.11ac(VHT20)<br>IEEE 802.11ax(HE20) |                 | IEEE 802.11n(HT40)<br>IEEE 802.11ac(VHT40)<br>IEEE 802.11ax(HE40) |                 | IEEE 802.11ac(VHT80)<br>IEEE 802.11ax(HE80) |                 |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------|-----------------|---------------------------------------------|-----------------|
| UNII-2A                                                                           |                 | UNII-2A                                                           |                 | UNII-2A                                     |                 |
| Channel                                                                           | Frequency (MHz) | Channel                                                           | Frequency (MHz) | Channel                                     | Frequency (MHz) |
| 52                                                                                | 5260            | 54                                                                | 5270            | 58                                          | 5290            |
| 56                                                                                | 5280            | 62                                                                | 5310            |                                             |                 |
| 60                                                                                | 5300            |                                                                   |                 |                                             |                 |
| 64                                                                                | 5320            |                                                                   |                 |                                             |                 |

| IEEE 802.11a<br>IEEE 802.11n(HT20)<br>IEEE 802.11ac(VHT20)<br>IEEE 802.11ax(HE20) |                 | IEEE 802.11n(HT40)<br>IEEE 802.11ac(VHT40)<br>IEEE 802.11ax(HE40) |                 | IEEE 802.11ac(VHT80)<br>IEEE 802.11ax(HE80) |                 |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------|-----------------|---------------------------------------------|-----------------|
| UNII-2C                                                                           |                 | UNII-2C                                                           |                 | UNII-2C                                     |                 |
| Channel                                                                           | Frequency (MHz) | Channel                                                           | Frequency (MHz) | Channel                                     | Frequency (MHz) |
| 100                                                                               | 5500            | 102                                                               | 5510            | 106                                         | 5530            |
| 104                                                                               | 5520            | 110                                                               | 5550            | 122                                         | 5610            |
| 108                                                                               | 5540            | 118                                                               | 5590            |                                             |                 |
| 112                                                                               | 5560            | 126                                                               | 5630            |                                             |                 |
| 116                                                                               | 5580            | 134                                                               | 5670            |                                             |                 |
| 120                                                                               | 5600            |                                                                   |                 |                                             |                 |
| 124                                                                               | 5620            |                                                                   |                 |                                             |                 |
| 128                                                                               | 5640            |                                                                   |                 |                                             |                 |
| 132                                                                               | 5660            |                                                                   |                 |                                             |                 |
| 136                                                                               | 5680            |                                                                   |                 |                                             |                 |
| 140                                                                               | 5700            |                                                                   |                 |                                             |                 |

| IEEE 802.11ac(VHT160)<br>IEEE 802.11ax(HE160) |                 |
|-----------------------------------------------|-----------------|
| Channel                                       | Frequency (MHz) |
| 50                                            | 5250            |
| 114                                           | 5570            |

### 3. Antenna Specification:

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|-------|------------|--------------|-----------|------------|
| 1    | N/A   | N/A        | Internal     | N/A       | 4.01       |
| 2    | N/A   | N/A        | Internal     | N/A       | 3.14       |
| 3    | N/A   | N/A        | Internal     | N/A       | 3.46       |
| 4    | N/A   | N/A        | Internal     | N/A       | 4.92       |

Note:

- 1) For CDD: Directional Gain=2.50 dBi

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k/20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

- 2) For TXBF: Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.83 \text{ dBi}$ .

Then, the output power limit is  $23.98 - (6.83 - 6) = 23.15$ , the power spectral density limit is  $11 - (6.83 - 6) = 10.17$ .

- 3) The antenna gain is provided by the manufacturer.

### 4. Table for Antenna Configuration:

For Non Beamforming:

| Operating Mode        | TX Mode | 4TX                                   |
|-----------------------|---------|---------------------------------------|
| IEEE 802.11a          |         | V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4) |
| IEEE 802.11n(HT20)    |         | V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4) |
| IEEE 802.11n(HT40)    |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT20)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT40)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT80)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT160) |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE20)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE40)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE80)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE160)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |

For Beamforming:

| Operating Mode        | TX Mode | 4TX                                   |
|-----------------------|---------|---------------------------------------|
| IEEE 802.11n(HT20)    |         | V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4) |
| IEEE 802.11n(HT40)    |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT20)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT40)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT80)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ac(VHT160) |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE20)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE40)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE80)   |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |
| IEEE 802.11ax(HE160)  |         | V(Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)  |

## 2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description                                     |
|--------------|-------------------------------------------------|
| Mode 1       | TX A Mode Channel 52/60/64 (UNII-2A)            |
| Mode 2       | TX N(HT20) Mode Channel 52/60/64 (UNII-2A)      |
| Mode 3       | TX N(HT40) Mode Channel 54/62 (UNII-2A)         |
| Mode 4       | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5       | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6       | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7       | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8       | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9       | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10      | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11      | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 12      | TX A Mode Channel 100/116/140 (UNII-2C)         |
| Mode 13      | TX N(HT20) Mode Channel 100/116/140 (UNII-2C)   |
| Mode 14      | TX N(HT40) Mode Channel 102/110/134 (UNII-2C)   |
| Mode 15      | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16      | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17      | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18      | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19      | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20      | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21      | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22      | TX AX(HE160) Mode Channel 114 (UNII-2C)         |
| Mode 23      | TX AC(VHT80) Mode Channel 122 (UNII-2C)         |

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test |                                         |
|----------------------------------------|-----------------------------------------|
| Final Test Mode                        | Description                             |
| Mode 23                                | TX AC(VHT80) Mode Channel 122 (UNII-2C) |

| Radiated Emissions Test - Below 1GHz |                                         |
|--------------------------------------|-----------------------------------------|
| Final Test Mode                      | Description                             |
| Mode 23                              | TX AC(VHT80) Mode Channel 122 (UNII-2C) |

| Radiated Emissions Test - Above 1GHz_Non Beamforming |                                                 |
|------------------------------------------------------|-------------------------------------------------|
| Final Test Mode                                      | Description                                     |
| Mode 1                                               | TX A Mode Channel 52/60/64 (UNII-2A)            |
| Mode 4                                               | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                               | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                               | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                               | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                               | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                               | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                                              | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                                              | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 12                                              | TX A Mode Channel 100/116/140 (UNII-2C)         |
| Mode 15                                              | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                                              | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                                              | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                                              | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                                              | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                                              | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                                              | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                                              | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Radiated Emissions Test - Above 1GHz_Beamforming |                                                 |
|--------------------------------------------------|-------------------------------------------------|
| Final Test Mode                                  | Description                                     |
| Mode 4                                           | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                           | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                           | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                           | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                           | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                           | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                                          | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                                          | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 15                                          | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                                          | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                                          | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                                          | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                                          | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                                          | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                                          | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                                          | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Maximum Output Power Test_Non Beamforming |                                                 |
|-------------------------------------------|-------------------------------------------------|
| Final Test Mode                           | Description                                     |
| Mode 1                                    | TX A Mode Channel 52/60/64 (UNII-2A)            |
| Mode 2                                    | TX N(HT20) Mode Channel 52/60/64 (UNII-2A)      |
| Mode 3                                    | TX N(HT40) Mode Channel 54/62 (UNII-2A)         |
| Mode 4                                    | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                    | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                    | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                    | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                    | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                    | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                                   | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                                   | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 12                                   | TX A Mode Channel 100/116/140 (UNII-2C)         |
| Mode 13                                   | TX N(HT20) Mode Channel 100/116/140 (UNII-2C)   |
| Mode 14                                   | TX N(HT40) Mode Channel 102/110/134 (UNII-2C)   |
| Mode 15                                   | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                                   | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                                   | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                                   | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                                   | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                                   | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                                   | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                                   | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Maximum Output Power Test_Beamforming |                                                 |
|---------------------------------------|-------------------------------------------------|
| Final Test Mode                       | Description                                     |
| Mode 2                                | TX N(HT20) Mode Channel 52/60/64 (UNII-2A)      |
| Mode 3                                | TX N(HT40) Mode Channel 54/62 (UNII-2A)         |
| Mode 4                                | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                               | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                               | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 13                               | TX N(HT20) Mode Channel 100/116/140 (UNII-2C)   |
| Mode 14                               | TX N(HT40) Mode Channel 102/110/134 (UNII-2C)   |
| Mode 15                               | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                               | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                               | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                               | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                               | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                               | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                               | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                               | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Power Spectral Density Test_Non Beamforming |                                                 |
|---------------------------------------------|-------------------------------------------------|
| Final Test Mode                             | Description                                     |
| Mode 1                                      | TX A Mode Channel 52/60/64 (UNII-2A)            |
| Mode 4                                      | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                      | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                      | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                      | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                      | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                      | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                                     | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                                     | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 12                                     | TX A Mode Channel 100/116/140 (UNII-2C)         |
| Mode 15                                     | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                                     | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                                     | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                                     | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                                     | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                                     | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                                     | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                                     | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Power Spectral Density Test_Beamforming |                                                 |
|-----------------------------------------|-------------------------------------------------|
| Final Test Mode                         | Description                                     |
| Mode 4                                  | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                                  | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                                  | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                                  | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                                  | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                                  | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                                 | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                                 | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 15                                 | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                                 | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                                 | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                                 | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                                 | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                                 | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                                 | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                                 | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

| Other Conducted Test_Non Beamforming |                                                 |
|--------------------------------------|-------------------------------------------------|
| Final Test Mode                      | Description                                     |
| Mode 1                               | TX A Mode Channel 52/60/64 (UNII-2A)            |
| Mode 4                               | TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)    |
| Mode 5                               | TX AC(VHT40) Mode Channel 54/62 (UNII-2A)       |
| Mode 6                               | TX AC(VHT80) Mode Channel 58 (UNII-2A)          |
| Mode 7                               | TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)     |
| Mode 8                               | TX AX(HE40) Mode Channel 54/62 (UNII-2A)        |
| Mode 9                               | TX AX(HE80) Mode Channel 58 (UNII-2A)           |
| Mode 10                              | TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)  |
| Mode 11                              | TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)   |
| Mode 12                              | TX A Mode Channel 100/116/140 (UNII-2C)         |
| Mode 15                              | TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C) |
| Mode 16                              | TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C) |
| Mode 17                              | TX AC(VHT80) Mode Channel 106/122 (UNII-2C)     |
| Mode 18                              | TX AC(VHT160) Mode Channel 114 (UNII-2C)        |
| Mode 19                              | TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)  |
| Mode 20                              | TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)  |
| Mode 21                              | TX AX(HE80) Mode Channel 106/122 (UNII-2C)      |
| Mode 22                              | TX AX(HE160) Mode Channel 114 (UNII-2C)         |

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11ac80 channel 122 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11ac(VHT20) mode, IEEE 802.11ac(VHT40) mode, IEEE 802.11ac(VHT80) mode, IEEE 802.11ac(VHT160) mode, IEEE 802.11ax(HE20) mode, IEEE 802.11ax(HE40) mode, IEEE 802.11ax(HE80) mode and IEEE 802.11ax(HE160) mode, only the worst cases are documented for other test items.
- (5) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items except Radiated Emissions Above 1GHz and Power Spectral Density test.
- (6) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

## 2.3 PARAMETERS OF TEST SOFTWARE

### Non Beamforming

| UNII-2A               |                         |      |      |
|-----------------------|-------------------------|------|------|
| Test Software Version | accessMTool_REL_3_1_0_6 |      |      |
| Frequency (MHz)       | 5260                    | 5300 | 5320 |
| IEEE 802.11a          | 64                      | 64   | 64   |
| IEEE 802.11n(HT20)    | 63                      | 63   | 63   |
| IEEE 802.11ac(VHT20)  | 63                      | 63   | 63   |
| IEEE 802.11ax(HE20)   | 63                      | 63   | 63   |
| Frequency (MHz)       | 5270                    | 5310 |      |
| IEEE 802.11n(HT40)    | 73                      | 73   |      |
| IEEE 802.11ac(VHT40)  | 72                      | 72   |      |
| IEEE 802.11ax(HE40)   | 72                      | 72   |      |
| Frequency (MHz)       | 5290                    |      |      |
| IEEE 802.11ac(VHT80)  | 73                      |      |      |
| IEEE 802.11ax(HE80)   | 72                      |      |      |

| UNII-1+UNII-2A        |                         |
|-----------------------|-------------------------|
| Test Software Version | accessMTool_REL_3_1_0_6 |
| Frequency (MHz)       | 5250                    |
| IEEE 802.11ac(VHT160) | 68                      |
| IEEE 802.11ax(HE160)  | 68                      |

| UNII-2C               |                         |      |      |
|-----------------------|-------------------------|------|------|
| Test Software Version | accessMTool_REL_3_1_0_6 |      |      |
| Frequency (MHz)       | 5500                    | 5580 | 5700 |
| IEEE 802.11a          | 58                      | 58   | 58   |
| IEEE 802.11n(HT20)    | 57                      | 57   | 57   |
| IEEE 802.11ac(VHT20)  | 57                      | 57   | 58   |
| IEEE 802.11ax(HE20)   | 58                      | 58   | 58   |
| Frequency (MHz)       | 5510                    | 5550 | 5670 |
| IEEE 802.11n(HT40)    | 69                      | 69   | 68   |
| IEEE 802.11ac(VHT40)  | 69                      | 69   | 68   |
| IEEE 802.11ax(HE40)   | 69                      | 69   | 68   |
| Frequency (MHz)       | 5530                    | 5610 |      |
| IEEE 802.11ac(VHT80)  | 70                      | 70   |      |
| IEEE 802.11ax(HE80)   | 69                      | 68   |      |
| Frequency (MHz)       | 5570                    |      |      |
| IEEE 802.11ac(VHT160) | 70                      |      |      |
| IEEE 802.11ax(HE160)  | 70                      |      |      |

### Beamforming

| UNII-2A               |                         |      |      |
|-----------------------|-------------------------|------|------|
| Test Software Version | accessMTool_REL_3_1_0_6 |      |      |
| Frequency (MHz)       | 5260                    | 5300 | 5320 |
| IEEE 802.11n(HT20)    | 61                      | 61   | 60   |
| IEEE 802.11ac(VHT20)  | 61                      | 61   | 60   |
| IEEE 802.11ax(HE20)   | 60                      | 60   | 59   |
| Frequency (MHz)       | 5270                    | 5310 |      |
| IEEE 802.11n(HT40)    | 68                      | 68   |      |
| IEEE 802.11ac(VHT40)  | 68                      | 68   |      |
| IEEE 802.11ax(HE40)   | 68                      | 68   |      |
| Frequency (MHz)       | 5290                    |      |      |
| IEEE 802.11ac(VHT80)  | 70                      |      |      |
| IEEE 802.11ax(HE80)   | 68                      |      |      |

| UNII-1+UNII-2A        |                         |
|-----------------------|-------------------------|
| Test Software Version | accessMTool_REL_3_1_0_6 |
| Frequency (MHz)       | 5250                    |
| IEEE 802.11ac(VHT160) | 56                      |
| IEEE 802.11ax(HE160)  | 54                      |

| UNII-2C               |                         |      |      |
|-----------------------|-------------------------|------|------|
| Test Software Version | accessMTool_REL_3_1_0_6 |      |      |
| Frequency (MHz)       | 5500                    | 5580 | 5700 |
| IEEE 802.11n(HT20)    | 55                      | 55   | 55   |
| IEEE 802.11ac(VHT20)  | 55                      | 55   | 55   |
| IEEE 802.11ax(HE20)   | 54                      | 54   | 54   |
| Frequency (MHz)       | 5510                    | 5550 | 5670 |
| IEEE 802.11n(HT40)    | 66                      | 66   | 66   |
| IEEE 802.11ac(VHT40)  | 67                      | 67   | 67   |
| IEEE 802.11ax(HE40)   | 66                      | 66   | 66   |
| Frequency (MHz)       | 5530                    | 5610 |      |
| IEEE 802.11ac(VHT80)  | 68                      | 68   |      |
| IEEE 802.11ax(HE80)   | 68                      | 68   |      |
| Frequency (MHz)       | 5570                    |      |      |
| IEEE 802.11ac(VHT160) | 51                      |      |      |
| IEEE 802.11ax(HE160)  | 51                      |      |      |

## 2.4 DUTY CYCLE


If duty cycle is  $\geq 98\%$ , duty factor is not required.

If duty cycle is  $< 98\%$ , duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

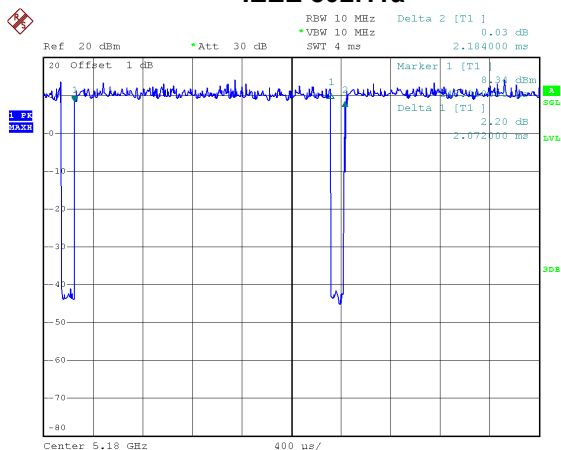

Date: 4.MAR.2021 10:39:24

Duty cycle =  $2.072 \text{ ms} / 2.184 \text{ ms} = 94.87\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.23$


IEEE 802.11n(HT20)

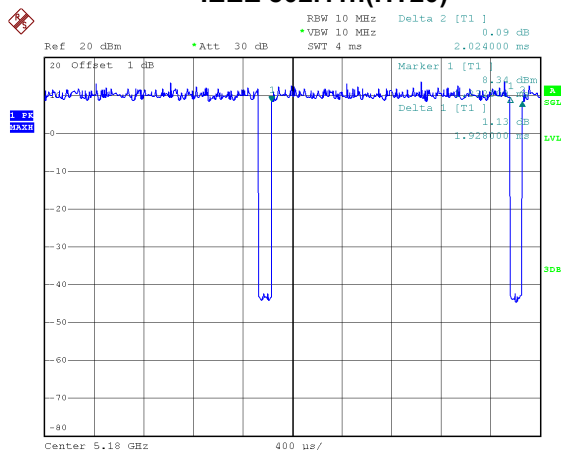

Date: 4.MAR.2021 10:40:28

Duty cycle =  $1.928 \text{ ms} / 2.024 \text{ ms} = 95.26\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.21$


IEEE 802.11n(HT40)

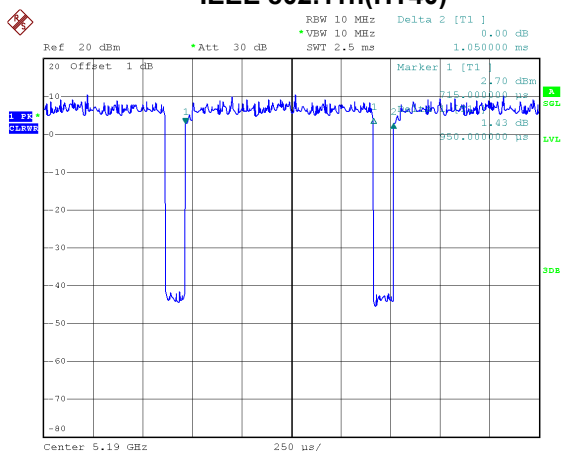

Date: 4.MAR.2021 10:41:53

Duty cycle =  $0.950 \text{ ms} / 1.050 \text{ ms} = 90.48\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.43$


IEEE 802.11ac(VHT20)

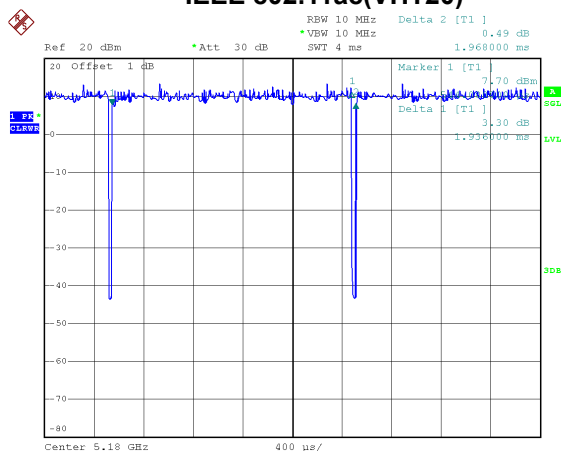

Date: 4.MAR.2021 10:41:31

Duty cycle =  $1.936 \text{ ms} / 1.968 \text{ ms} = 98.37\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.00$


## IEEE 802.11ac(VHT40)

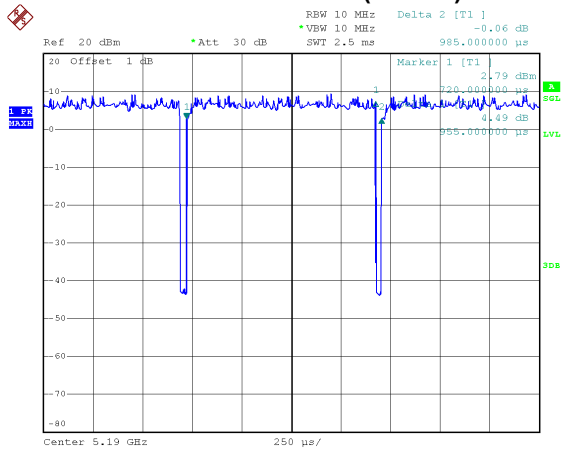

Date: 4.MAR.2021 10:42:47

Duty cycle = 0.955 ms / 0.985 ms = 96.95%  
Duty Factor = 10 log(1 / Duty cycle) = 0.13


## IEEE 802.11ac(VHT80)

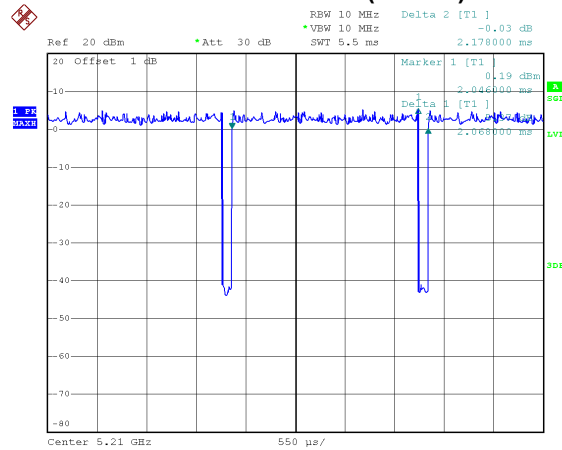

Date: 4.MAR.2021 10:43:31

Duty cycle = 2.068 ms / 2.178 ms = 94.95%  
Duty Factor = 10 log(1 / Duty cycle) = 0.23


## IEEE 802.11ac(VHT160)

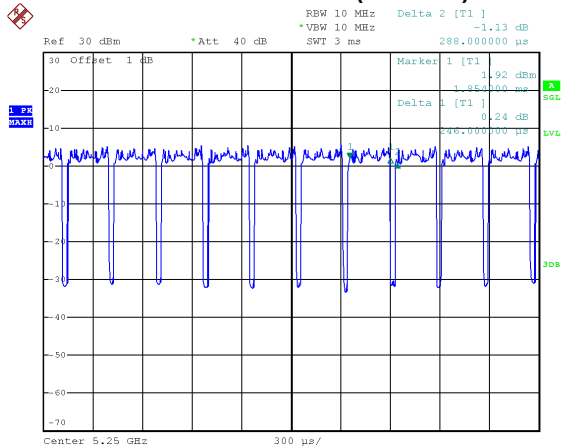

Date: 4.MAR.2021 17:09:56

Duty cycle = 0.246 ms / 0.288 ms = 85.42%  
Duty Factor = 10 log(1 / Duty cycle) = 0.68


## IEEE 802.11ax(HE20)

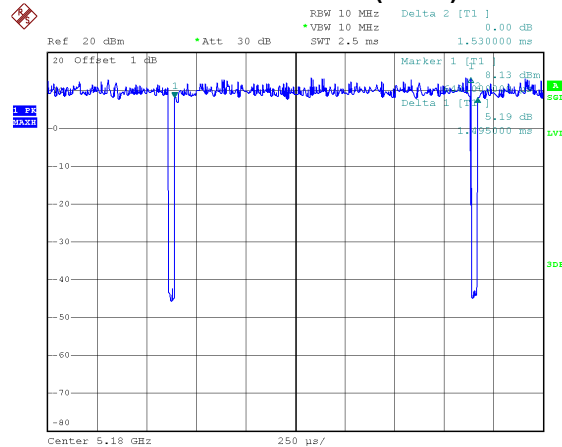

Date: 4.MAR.2021 10:44:23

Duty cycle = 1.495 ms / 1.530 ms = 97.71%  
Duty Factor = 10 log(1 / Duty cycle) = 0.10


## IEEE 802.11ax(HE40)

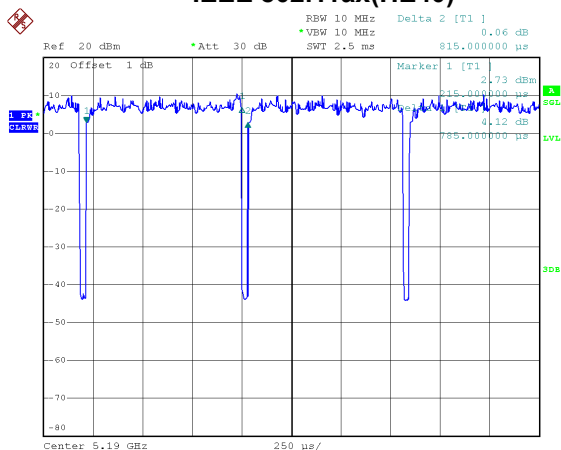

Date: 4.MAR.2021 10:45:11

Duty cycle = 0.785 ms / 0.815 ms = 96.32%  
 Duty Factor = 10 log(1 / Duty cycle) = 0.16


## IEEE 802.11ax(HE80)

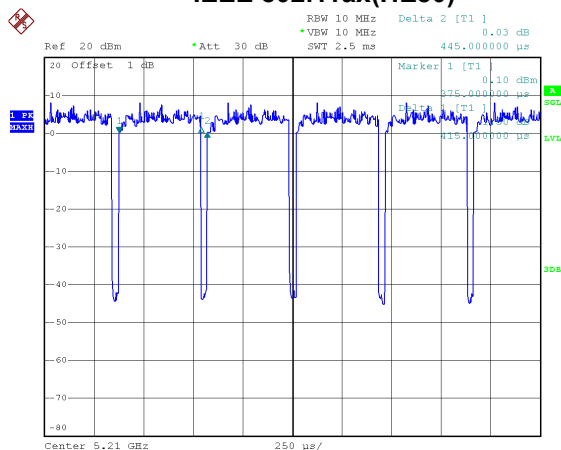

Date: 4.MAR.2021 10:46:07

Duty cycle = 0.415 ms / 0.445 ms = 93.26%  
 Duty Factor = 10 log(1 / Duty cycle) = 0.30

## IEEE 802.11ax(HE160)

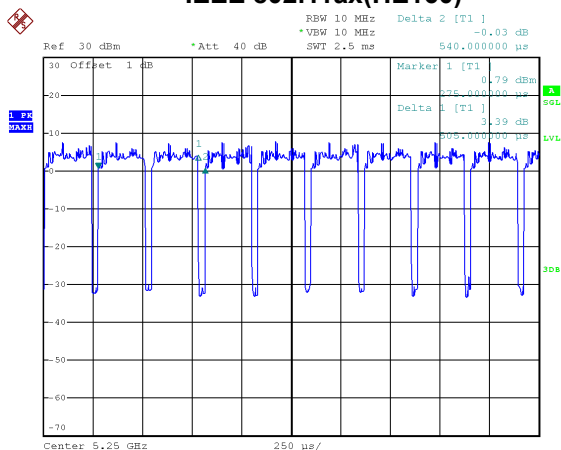

Date: 4.MAR.2021 17:06:36

Duty cycle = 0.505 ms / 0.540 ms = 93.52%  
 Duty Factor = 10 log(1 / Duty cycle) = 0.29

**NOTE:**

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0 kHz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle  $\geq$  98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 4 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11ax(HE80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

## 2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

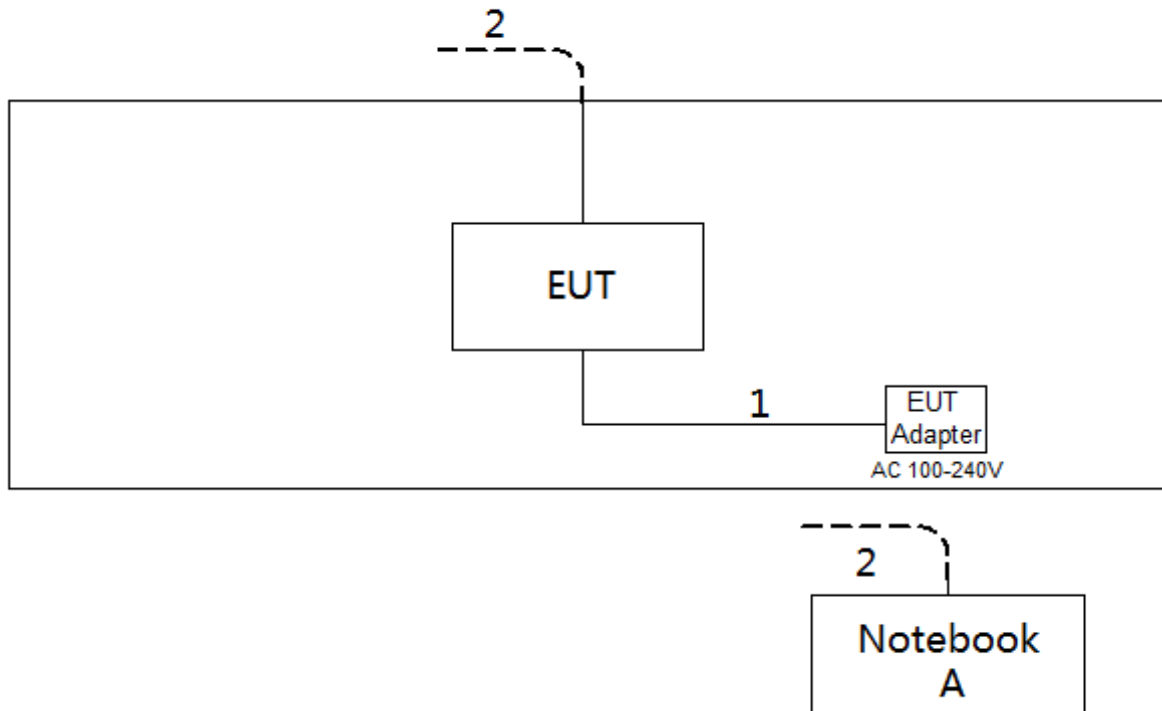

## 2.6 SUPPORT UNITS

| Item | Equipment | Brand | Model No.        | Series No. |
|------|-----------|-------|------------------|------------|
| A    | Notebook  | Dell  | Inspiron 15-7559 | N/A        |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | DC Cable   | NO            | NO           | 1.5m   |
| 2    | RJ45 Cable | NO            | NO           | 10m    |

### 3. AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

| Frequency<br>(MHz) | Limit (dB $\mu$ V) |           |
|--------------------|--------------------|-----------|
|                    | Quasi-peak         | Average   |
| 0.15 - 0.5         | 66 to 56*          | 56 to 46* |
| 0.5 - 5.0          | 56                 | 46        |
| 5.0 - 30.0         | 60                 | 50        |

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

| Receiver Parameter | Setting  |
|--------------------|----------|
| Start Frequency    | 0.15 MHz |
| Stop Frequency     | 30 MHz   |
| IF Bandwidth       | 9 kHz    |

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

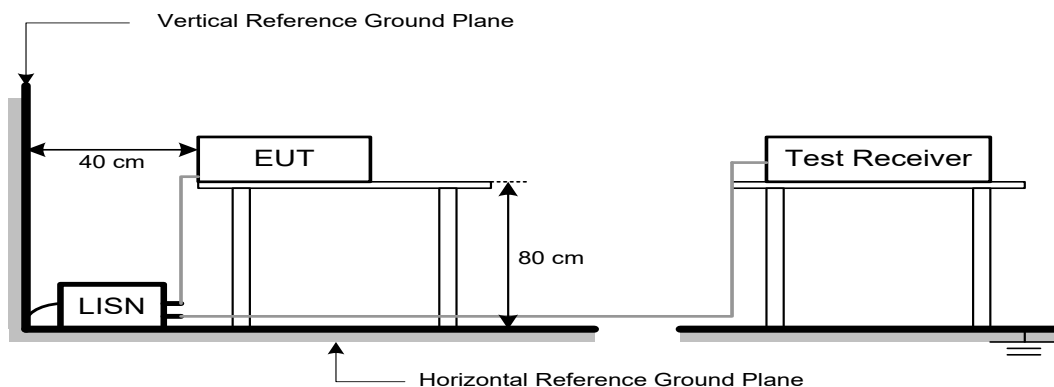

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

| Frequency (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dBμV/m) |
|-----------------|----------------------|------------------------------------------|
| 5250-5350       | -27                  | 68.2                                     |
| 5470-5725       | -27                  | 68.2                                     |

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

## 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

| Spectrum Parameters    | Setting                         |
|------------------------|---------------------------------|
| Start ~ Stop Frequency | 9 kHz~150 kHz for RBW 200 Hz    |
| Start ~ Stop Frequency | 0.15 MHz~30 MHz for RBW 9 kHz   |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for RBW 100 kHz |


| Spectrum Parameters                        | Setting                                                    |
|--------------------------------------------|------------------------------------------------------------|
| Start Frequency                            | 1000 MHz                                                   |
| Stop Frequency                             | 10th carrier harmonic or 40 GHz, whichever is lower        |
| RBW / VBW<br>(Emission in restricted band) | 1 MHz / 3 MHz for PK value<br>1 MHz / 1/T Hz for AVG value |


| Receiver Parameters    | Setting                             |
|------------------------|-------------------------------------|
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |
| Start ~ Stop Frequency | 1 GHz~40 GHz for PK/AVG detector    |

## 4.3 DEVIATION FROM TEST STANDARD

No deviation.

## 4.4 TEST SETUP

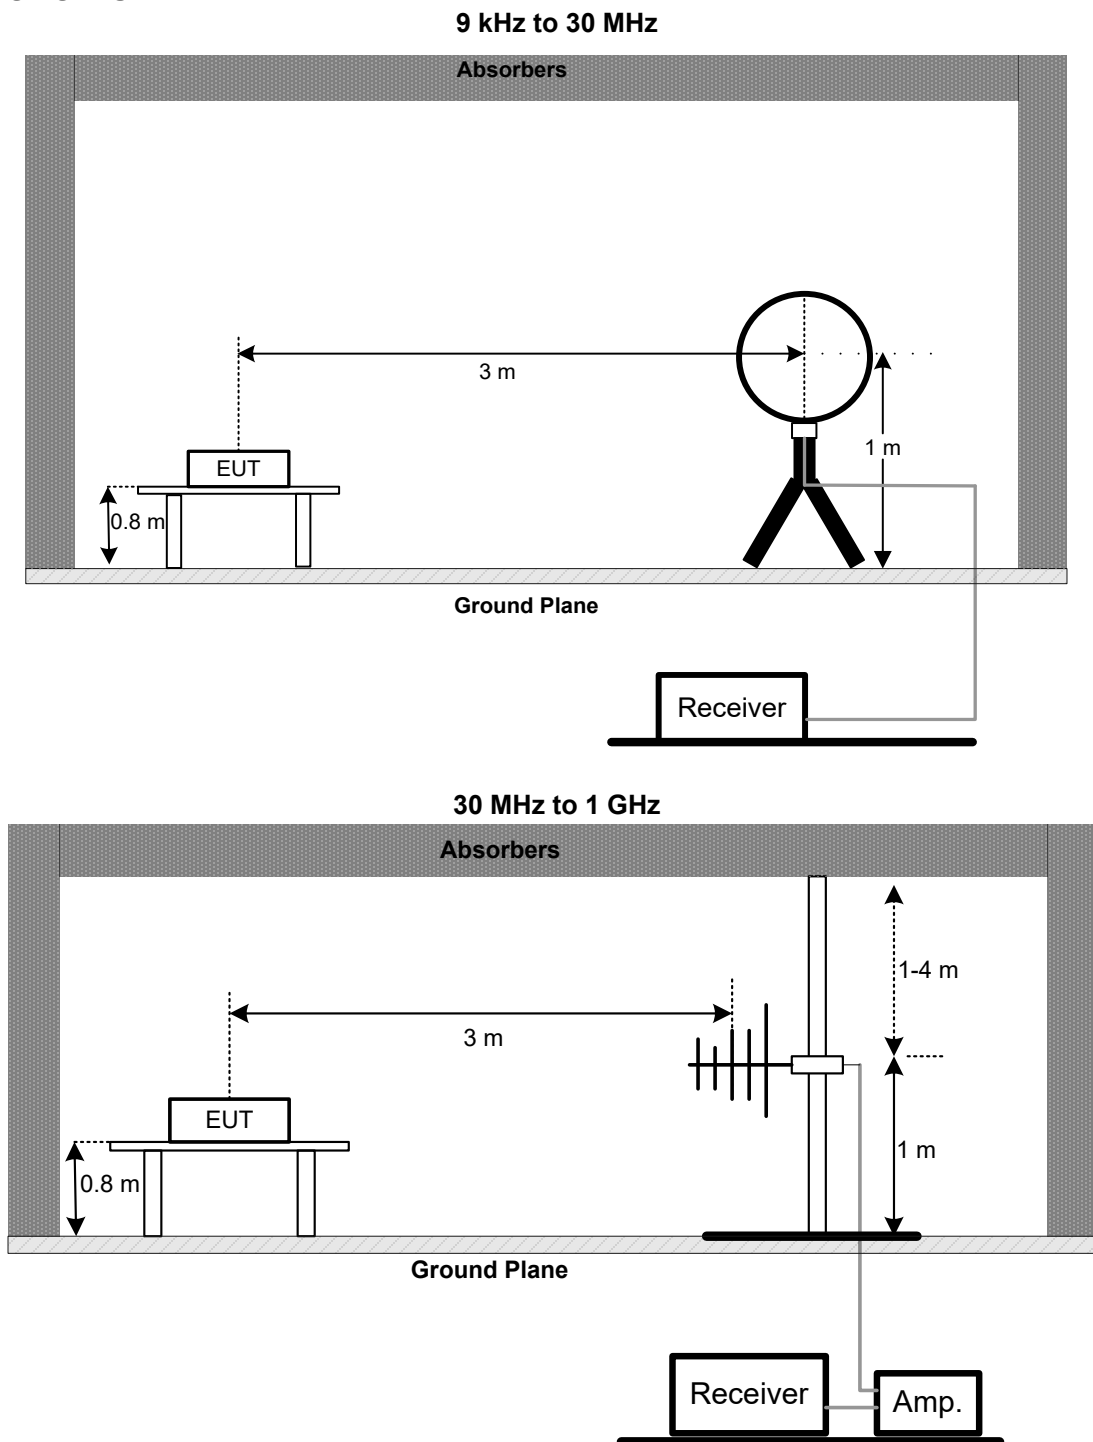

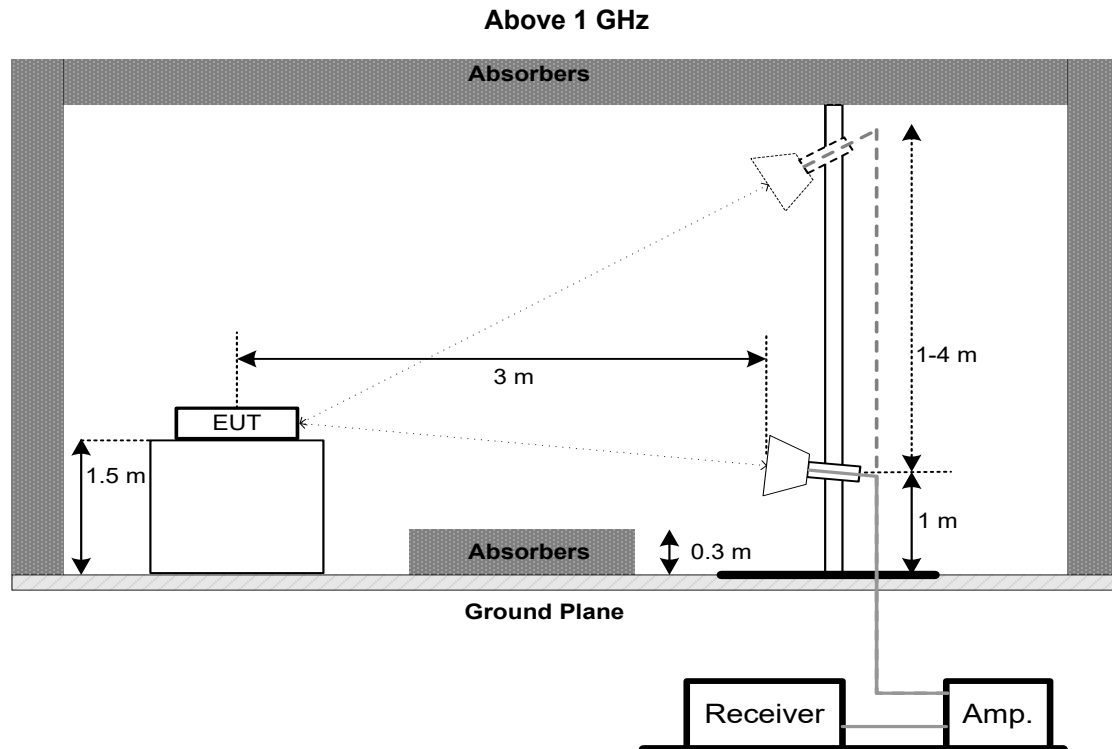

## 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

## 4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

## 4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH

### 5.1 LIMIT

| Section       | Test Item       | Limit | Frequency Range (MHz) |
|---------------|-----------------|-------|-----------------------|
| FCC 15.407(a) | 26 dB Bandwidth | -     | 5250-5350             |
|               | 26 dB Bandwidth | -     | 5470-5725             |

### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:

| Spectrum Parameter | Setting                                      |
|--------------------|----------------------------------------------|
| Span Frequency     | > 26 dB Bandwidth                            |
| RBW                | Appromiximately 1% of the emission bandwidth |
| VBW                | > RBW                                        |
| Detector           | Peak                                         |
| Trace              | Max Hold                                     |
| Sweep Time         | Auto                                         |

- c. Measured the spectrum width with power higher than 26 dB below carrier.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6 TEST RESULTS

Please refer to the APPENDIX E.

## 6. MAXIMUM OUTPUT POWER

### 6.1 LIMIT

| Section       | Test Item            | Limit              | Frequency Range (MHz) |
|---------------|----------------------|--------------------|-----------------------|
| FCC 15.407(a) | Maximum Output Power | 250 mW (23.98 dBm) | 5250-5350             |
|               |                      | 250 mW (23.98 dBm) | 5470-5725             |

Note:

- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


### 6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

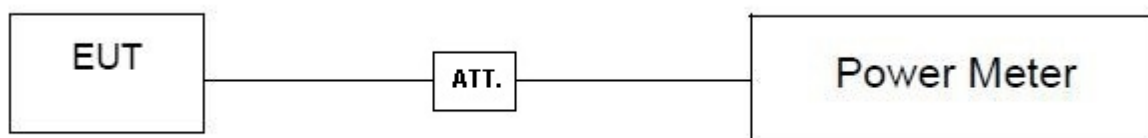

### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F.

## 7. POWER SPECTRAL DENSITY

### 7.1 LIMIT

| Section       | Test Item              | Limit      | Frequency Range (MHz) |
|---------------|------------------------|------------|-----------------------|
| FCC 15.407(a) | Power Spectral Density | 11 dBm/MHz | 5250-5350             |
|               |                        | 11 dBm/MHz | 5470-5725             |

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

| Spectrum Parameter | Setting                                                      |
|--------------------|--------------------------------------------------------------|
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                | 1 MHz.                                                       |
| VBW                | 3 MHz.                                                       |
| Detector           | RMS                                                          |
| Trace average      | 100 trace                                                    |
| Sweep Time         | Auto                                                         |

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX G.

## 8. FREQUENCY STABILITY

### 8.1 LIMIT

| Section       | Test Item           | Limit                                                                                                                             | Frequency Range (MHz) |
|---------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| FCC 15.407(g) | Frequency Stability | An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual. | 5250-5350             |
|               |                     |                                                                                                                                   | 5470-5725             |

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


| Spectrum Parameter | Setting                                          |
|--------------------|--------------------------------------------------|
| Span Frequency     | Entire absence of modulation emissions bandwidth |
| RBW                | 10 kHz                                           |
| VBW                | 10 kHz                                           |
| Detector           | Peak                                             |
| Trace              | Max Hold                                         |
| Sweep Time         | Auto                                             |

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

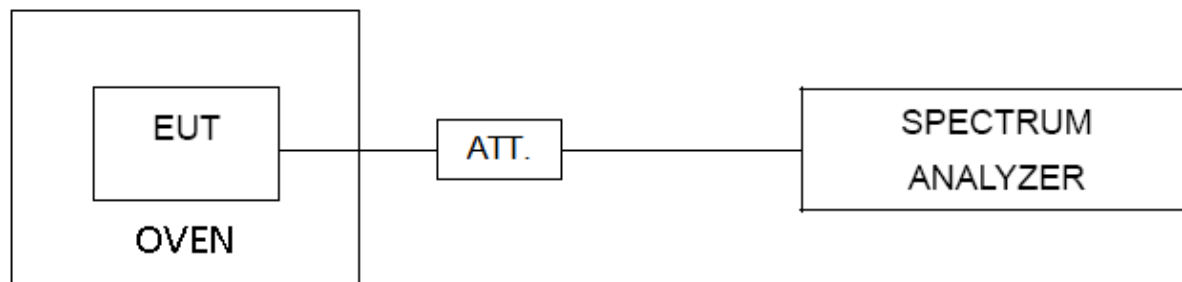

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX H.

## 9. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions |                      |              |                       |            |                                |
|-----------------------------------|----------------------|--------------|-----------------------|------------|--------------------------------|
| Item                              | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until               |
| 1                                 | EMI Test Receiver    | R&S          | ESCI                  | 100382     | Feb. 28, 2022                  |
| 2                                 | LISN                 | EMCO         | 3816/2                | 52765      | Feb. 27, 2022                  |
| 3                                 | TWO-LINE V-NETWORK   | R&S          | ENV216                | 101447     | Feb. 27, 2022                  |
| 4                                 | 50Ω Terminator       | SHX          | TF5-3                 | 15041305   | Feb. 27, 2022                  |
| 5                                 | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A                            |
| 6                                 | Cable                | N/A          | RG223                 | 12m        | Mar. 09, 2021<br>Mar. 09, 2022 |
| 7                                 | 643 Shield Room      | ETS          | 6*4*3m                | N/A        | N/A                            |

| Radiated Emissions - 9 kHz to 30 MHz |                      |              |                       |            |                                |
|--------------------------------------|----------------------|--------------|-----------------------|------------|--------------------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until               |
| 1                                    | Antenna              | EM           | EM-6876-1             | 230        | Apr. 15, 2021<br>Apr. 15, 2022 |
| 2                                    | Cable                | N/A          | RG 213/U              | N/A        | May 29, 2021                   |
| 3                                    | EMI Test Receiver    | R&S          | ESCI                  | 100895     | Feb. 27, 2022                  |
| 4                                    | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A                            |
| 5                                    | 966 Chambe Room      | RM           | 9*6*6m                | N/A        | Jul. 25, 2021                  |

| Radiated Emissions - 30 MHz to 1 GHz |                          |              |                             |             |                  |
|--------------------------------------|--------------------------|--------------|-----------------------------|-------------|------------------|
| Item                                 | Kind of Equipment        | Manufacturer | Type No.                    | Serial No.  | Calibrated until |
| 1                                    | Trilog-Broadband Antenna | Schwarzbeck  | VULB9168                    | 586         | Nov. 27, 2021    |
| 2                                    | Amplifier                | HP           | 8447D                       | 2944A08742  | Feb. 28, 2022    |
| 3                                    | Receiver                 | Agilent      | N9038A                      | MY52130039  | Jul. 25, 2021    |
| 4                                    | Cable                    | emci         | LMR-400(30MHz-1 GHz)(8m+5m) | N/A         | May 22, 2021     |
| 5                                    | Controller               | CT           | SC100                       | N/A         | N/A              |
| 6                                    | Controller               | MF           | MF-7802                     | MF780208416 | N/A              |
| 7                                    | Measurement Software     | Farad        | EZ-EMC Ver.NB-03A1-01       | N/A         | N/A              |
| 8                                    | 966 Chambe Room          | RM           | 9*6*6m                      | N/A         | Jul. 25, 2021    |

| Radiated Emissions - Above 1 GHz |                                     |                |                       |               |                  |
|----------------------------------|-------------------------------------|----------------|-----------------------|---------------|------------------|
| Item                             | Kind of Equipment                   | Manufacturer   | Type No.              | Serial No.    | Calibrated until |
| 1                                | Double Ridged Guide Antenna         | ETS            | 3115                  | 75789         | May 12, 2021     |
| 2                                | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170             | 9170319       | Jul. 07, 2021    |
| 3                                | Amplifier                           | Agilent        | 8449B                 | 3008A02584    | Jul. 25, 2021    |
| 4                                | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045            | 980039 & HA01 | Feb. 28, 2022    |
| 5                                | Receiver                            | Agilent        | N9038A                | MY52130039    | Jul. 25, 2021    |
| 6                                | Controller                          | CT             | SC100                 | N/A           | N/A              |
| 7                                | Controller                          | MF             | MF-7802               | MF780208416   | N/A              |
| 8                                | Cable                               | N/A            | EMC104-SM-SM-6000     | N/A           | Oct. 16, 2021    |
| 9                                | Measurement Software                | Farad          | EZ-EMC Ver.NB-03A1-01 | N/A           | N/A              |
| 10                               | Band Reject Filter                  | Micro-Tronics  | BRC50704-01           | 8             | Feb. 27, 2022    |
| 11                               | Band Reject Filter                  | Micro-Tronics  | BRC50703-01           | 7             | Feb. 27, 2022    |
| 12                               | 966 Chambe Room                     | RM             | 9*6*6m                | N/A           | Jul. 25, 2021    |

| Bandwidth & Power Spectral Density |                   |              |          |            |                  |
|------------------------------------|-------------------|--------------|----------|------------|------------------|
| Item                               | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                                  | Spectrum Analyzer | R&S          | FSP40    | 100185     | Jul. 25, 2021    |
| 2                                  | Attenuator        | WOKEN        | 6SM3502  | VAS1214NL  | Feb. 07, 2022    |
| 3                                  | RF Cable          | Tongkaichuan | N/A      | N/A        | N/A              |
| 4                                  | DC Block          | Mini         | N/A      | N/A        | N/A              |

| Maximum Output Power |                       |              |          |            |                  |
|----------------------|-----------------------|--------------|----------|------------|------------------|
| Item                 | Kind of Equipment     | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                    | Peak Power Analyzer   | Keysight     | 8990B    | MY51000506 | Aug. 07, 2021    |
| 2                    | Wideband power sensor | Keysight     | N1923A   | MY58310004 | Jul. 25, 2021    |
| 3                    | Attenuator            | WOKEN        | 6SM3502  | VAS1214NL  | Feb. 07, 2022    |
| 4                    | RF Cable              | Tongkaichuan | N/A      | N/A        | N/A              |


| Frequency Stability |                       |              |              |            |                  |
|---------------------|-----------------------|--------------|--------------|------------|------------------|
| Item                | Kind of Equipment     | Manufacturer | Type No.     | Serial No. | Calibrated until |
| 1                   | Spectrum Analyzer     | R&S          | FSP40        | 100185     | Jul. 25, 2021    |
| 2                   | Precision Oven Tester | CEPREI       | CEEC-M64T-40 | 15-008     | Feb. 27, 2022    |
| 3                   | Attenuator            | WOKEN        | 6SM3502      | VAS1214NL  | Feb. 07, 2022    |
| 4                   | RF Cable              | Tongkaichuan | N/A          | N/A        | N/A              |
| 5                   | DC Block              | Mini         | N/A          | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

|           |                               |       |      |
|-----------|-------------------------------|-------|------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Phase | Line |
|-----------|-------------------------------|-------|------|

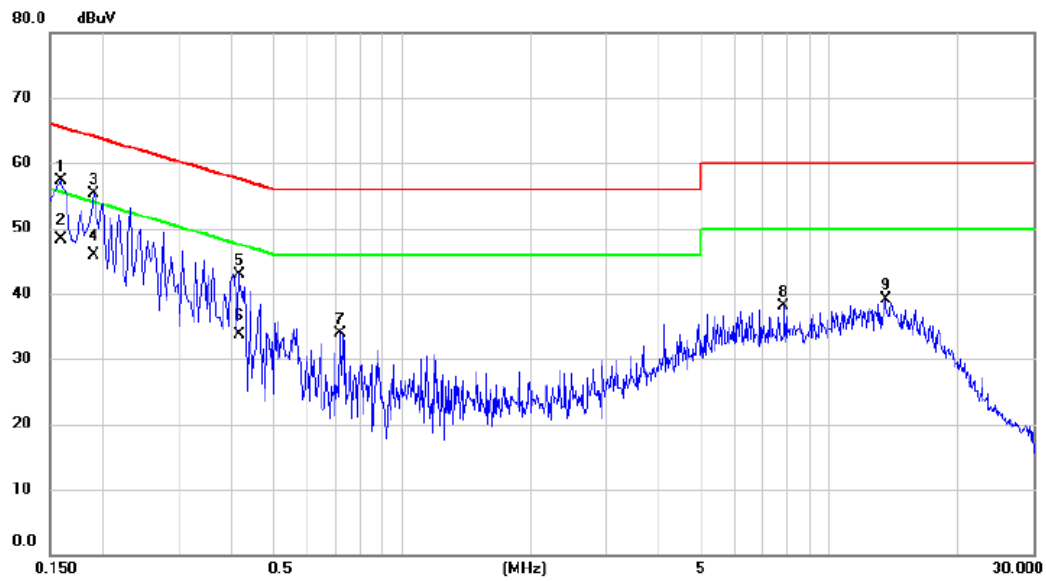


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1590       | 47.54                    | 9.73                    | 57.27                    | 65.52         | -8.25        | peak     |         |
| 2   | *   | 0.1590       | 38.50                    | 9.73                    | 48.23                    | 55.52         | -7.29        | AVG      |         |
| 3   |     | 0.1905       | 45.47                    | 9.88                    | 55.35                    | 64.01         | -8.66        | peak     |         |
| 4   |     | 0.1905       | 36.10                    | 9.88                    | 45.98                    | 54.01         | -8.03        | AVG      |         |
| 5   |     | 0.4153       | 33.10                    | 9.90                    | 43.00                    | 57.54         | -14.54       | peak     |         |
| 6   |     | 0.4155       | 23.80                    | 9.90                    | 33.70                    | 47.54         | -13.84       | AVG      |         |
| 7   |     | 0.7170       | 23.94                    | 9.87                    | 33.81                    | 56.00         | -22.19       | peak     |         |
| 8   |     | 7.8135       | 27.65                    | 10.49                   | 38.14                    | 60.00         | -21.86       | peak     |         |
| 9   |     | 13.5060      | 28.30                    | 10.80                   | 39.10                    | 60.00         | -20.90       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

|           |                               |       |         |
|-----------|-------------------------------|-------|---------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Phase | Neutral |
|-----------|-------------------------------|-------|---------|

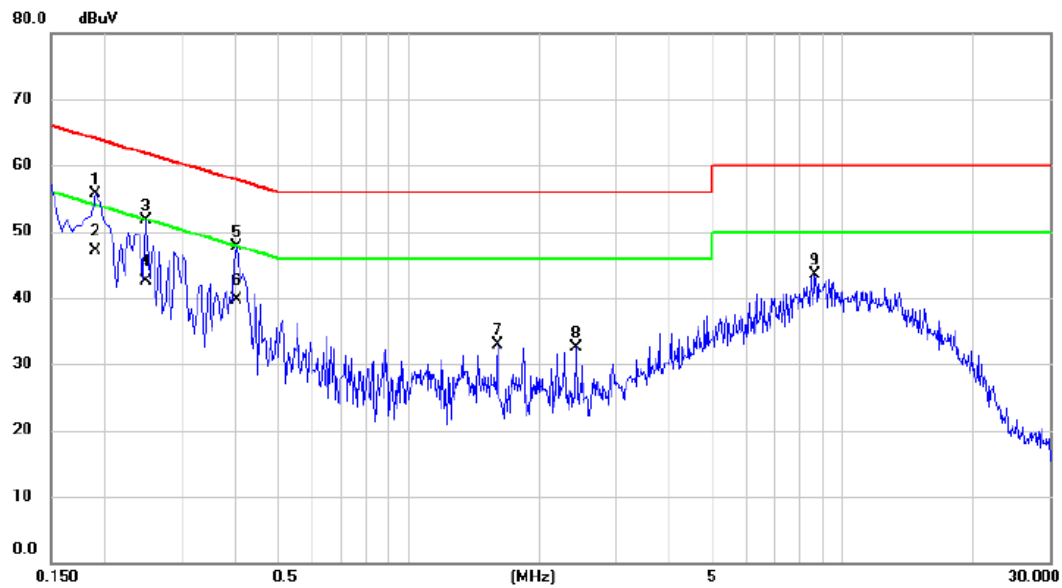


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1905       | 45.67                    | 9.98                    | 55.65                    | 64.01         | -8.36        | peak     |         |
| 2   | *   | 0.1905       | 37.20                    | 9.98                    | 47.18                    | 54.01         | -6.83        | AVG      |         |
| 3   |     | 0.2490       | 41.66                    | 9.97                    | 51.63                    | 61.79         | -10.16       | peak     |         |
| 4   |     | 0.2490       | 32.50                    | 9.97                    | 42.47                    | 51.79         | -9.32        | AVG      |         |
| 5   |     | 0.4020       | 37.55                    | 10.07                   | 47.62                    | 57.81         | -10.19       | peak     |         |
| 6   |     | 0.4020       | 29.60                    | 10.07                   | 39.67                    | 47.81         | -8.14        | AVG      |         |
| 7   |     | 1.6034       | 22.63                    | 10.34                   | 32.97                    | 56.00         | -23.03       | peak     |         |
| 8   |     | 2.4314       | 22.18                    | 10.42                   | 32.60                    | 56.00         | -23.40       | peak     |         |
| 9   |     | 8.6460       | 32.64                    | 10.90                   | 43.54                    | 60.00         | -16.46       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

|           |                               |              |        |
|-----------|-------------------------------|--------------|--------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Ant 0° |
|-----------|-------------------------------|--------------|--------|

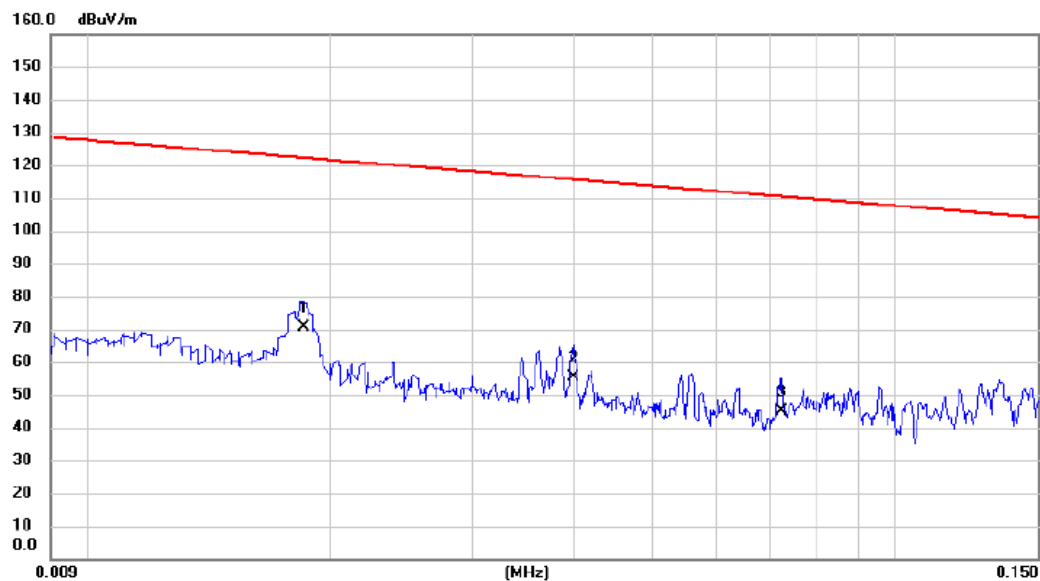

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 0.018        | 57.01                    | 13.68                   | 70.69                      | 122.26          | -51.57       | AVG      |         |
| 2       | 0.040        | 42.81                    | 12.69                   | 55.50                      | 115.56          | -60.06       | AVG      |         |
| 3       | 0.072        | 32.64                    | 12.55                   | 45.19                      | 110.41          | -65.22       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                               |              |        |
|-----------|-------------------------------|--------------|--------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Ant 0° |
|-----------|-------------------------------|--------------|--------|




| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 0.400        | 47.35                    | 12.26                   | 59.61                      | 95.57           | -35.96       | AVG      |         |
| 2 *     | 0.844        | 46.25                    | 11.86                   | 58.11                      | 69.08           | -10.97       | QP       |         |
| 3       | 3.491        | 39.84                    | 10.88                   | 50.72                      | 69.54           | -18.82       | QP       |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                               |              |         |
|-----------|-------------------------------|--------------|---------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Ant 90° |
|-----------|-------------------------------|--------------|---------|

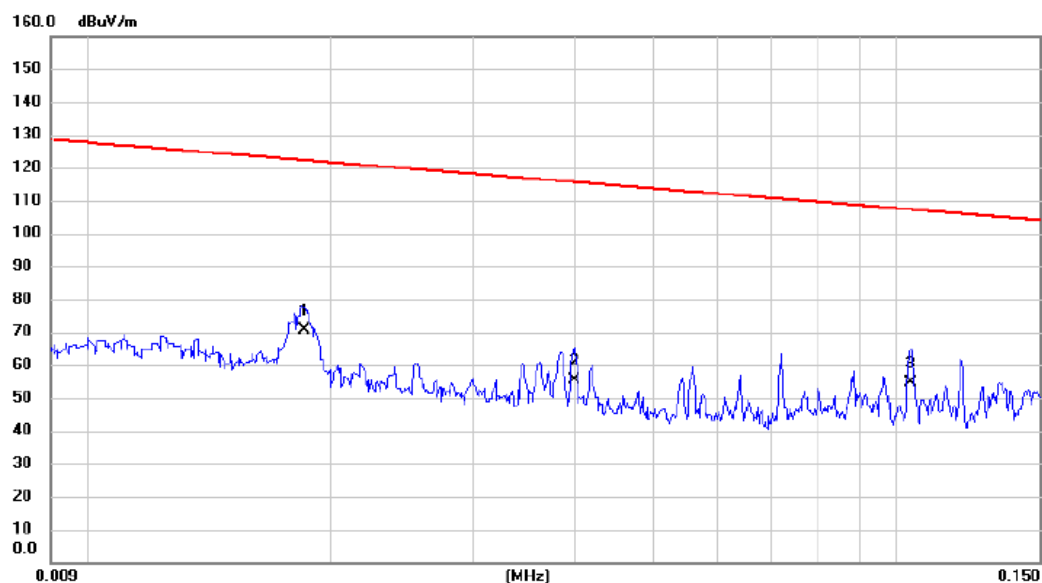

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 0.018        | 56.85                    | 13.68                   | 70.53                      | 122.26          | -51.73       | AVG      |         |
| 2   |     | 0.040        | 42.53                    | 12.69                   | 55.22                      | 115.56          | -60.34       | AVG      |         |
| 3   |     | 0.104        | 41.75                    | 12.72                   | 54.47                      | 107.26          | -52.79       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                               |              |         |
|-----------|-------------------------------|--------------|---------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Ant 90° |
|-----------|-------------------------------|--------------|---------|



| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 0.190        | 54.01                    | 12.76                   | 66.77                      | 102.01          | -35.24       | AVG      |         |
| 2 *     | 0.817        | 45.92                    | 11.87                   | 57.79                      | 69.36           | -11.57       | QP       |         |
| 3       | 3.720        | 39.52                    | 10.91                   | 50.43                      | 69.54           | -19.11       | QP       |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

|           |                               |              |          |
|-----------|-------------------------------|--------------|----------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Vertical |
|-----------|-------------------------------|--------------|----------|

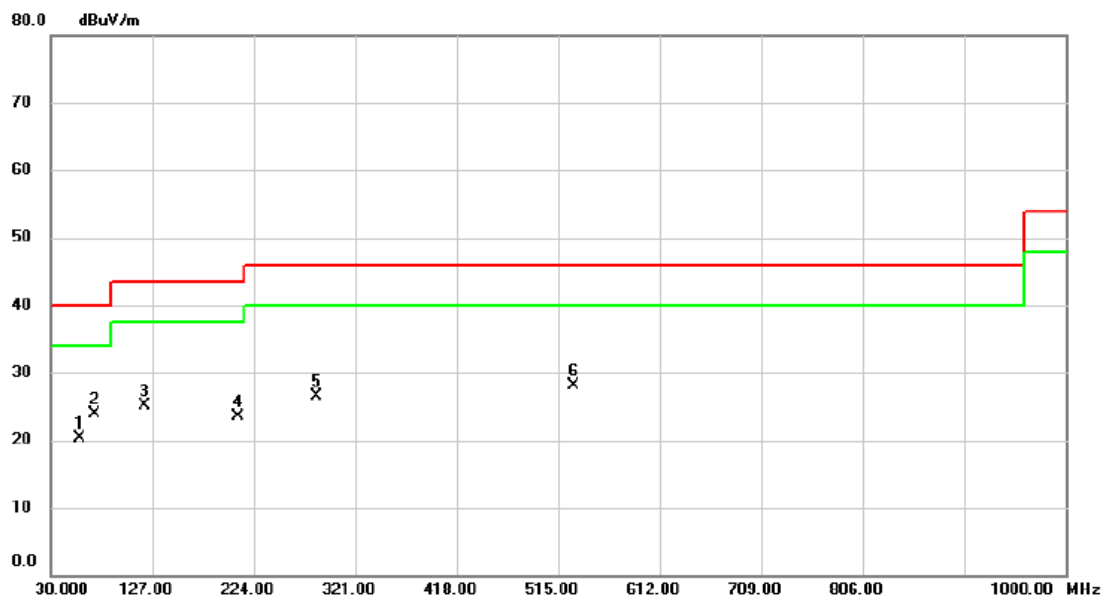


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 58.130       | 34.47                    | -14.25                  | 20.22                      | 40.00           | -19.78       | peak     |         |
| 2 *     | 72.590       | 40.65                    | -16.79                  | 23.86                      | 40.00           | -16.14       | peak     |         |
| 3       | 119.240      | 39.31                    | -14.22                  | 25.09                      | 43.50           | -18.41       | peak     |         |
| 4       | 209.450      | 38.66                    | -15.24                  | 23.42                      | 43.50           | -20.08       | peak     |         |
| 5       | 284.140      | 38.01                    | -11.43                  | 26.58                      | 46.00           | -19.42       | peak     |         |
| 6       | 529.550      | 34.30                    | -6.16                   | 28.14                      | 46.00           | -17.86       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                               |              |            |
|-----------|-------------------------------|--------------|------------|
| Test Mode | TX AC(VHT80) Mode Channel 122 | Polarization | Horizontal |
|-----------|-------------------------------|--------------|------------|

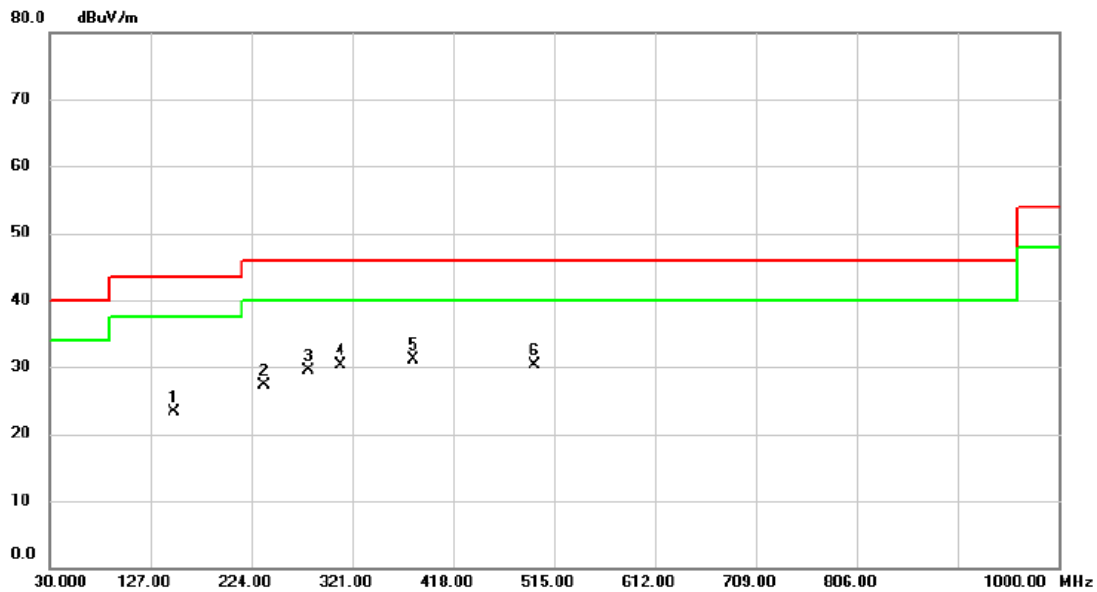

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 149.310      | 35.87                    | -12.64                  | 23.23                      | 43.50           | -20.27       | peak     |         |
| 2       | 235.640      | 40.95                    | -13.62                  | 27.33                      | 46.00           | -18.67       | peak     |         |
| 3       | 278.320      | 41.20                    | -11.68                  | 29.52                      | 46.00           | -16.48       | peak     |         |
| 4       | 309.360      | 41.08                    | -10.72                  | 30.36                      | 46.00           | -15.64       | peak     |         |
| 5 *     | 379.200      | 40.34                    | -9.27                   | 31.07                      | 46.00           | -14.93       | peak     |         |
| 6       | 495.600      | 36.95                    | -6.62                   | 30.33                      | 46.00           | -15.67       | peak     |         |

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

## Non Beamforming

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5260 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

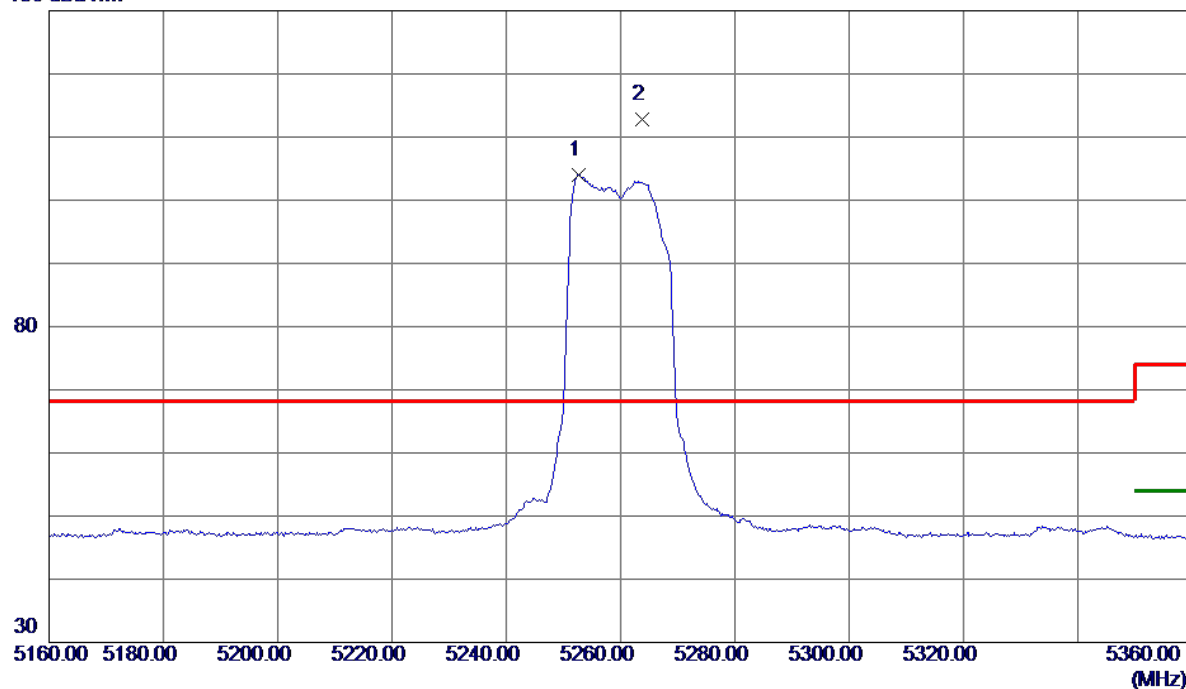


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5252.6000    | 88.44                      | 15.50                   | 103.94                    | 999.00          | -895.06      | AVG      | No Limit |
| 2 * | 5263.8000    | 97.27                      | 15.52                   | 112.79                    | 68.20           | 44.59        | Peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5260 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

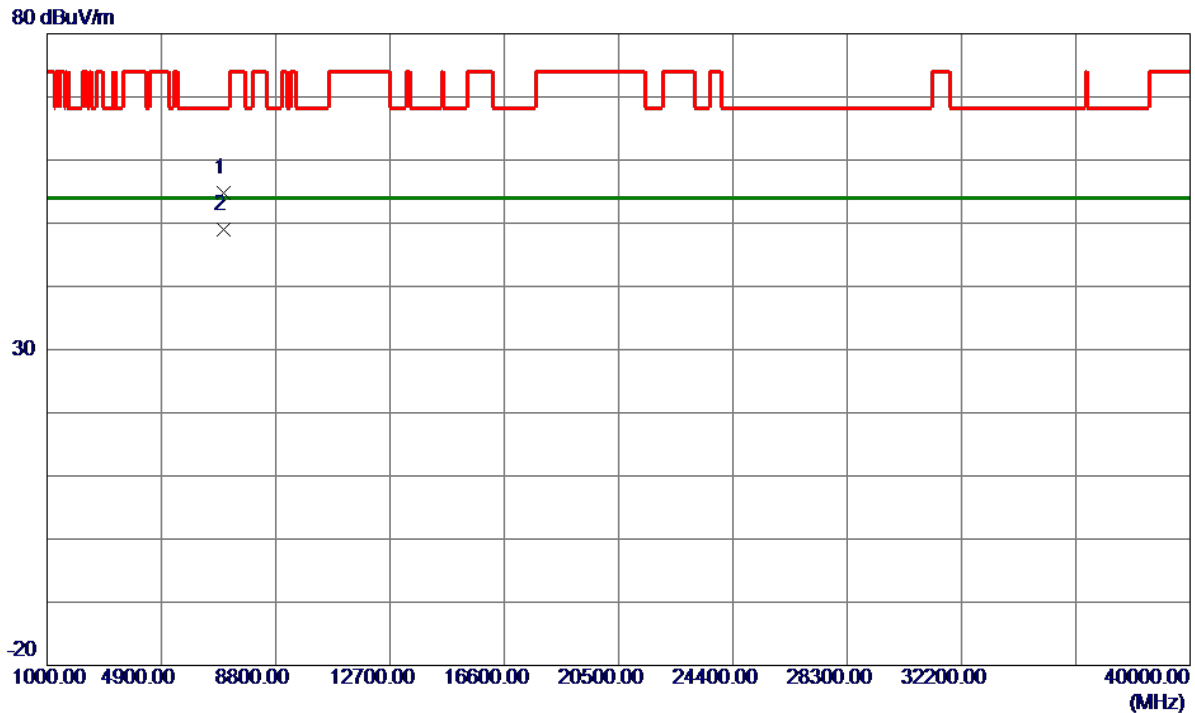


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7013.2200    | 44.95                      | 9.81                    | 54.76                     | 68.20           | -13.44       | Peak     |         |
| 2 * | 7013.2700    | 39.20                      | 9.81                    | 49.01                     | 54.00           | -4.99        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5260 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

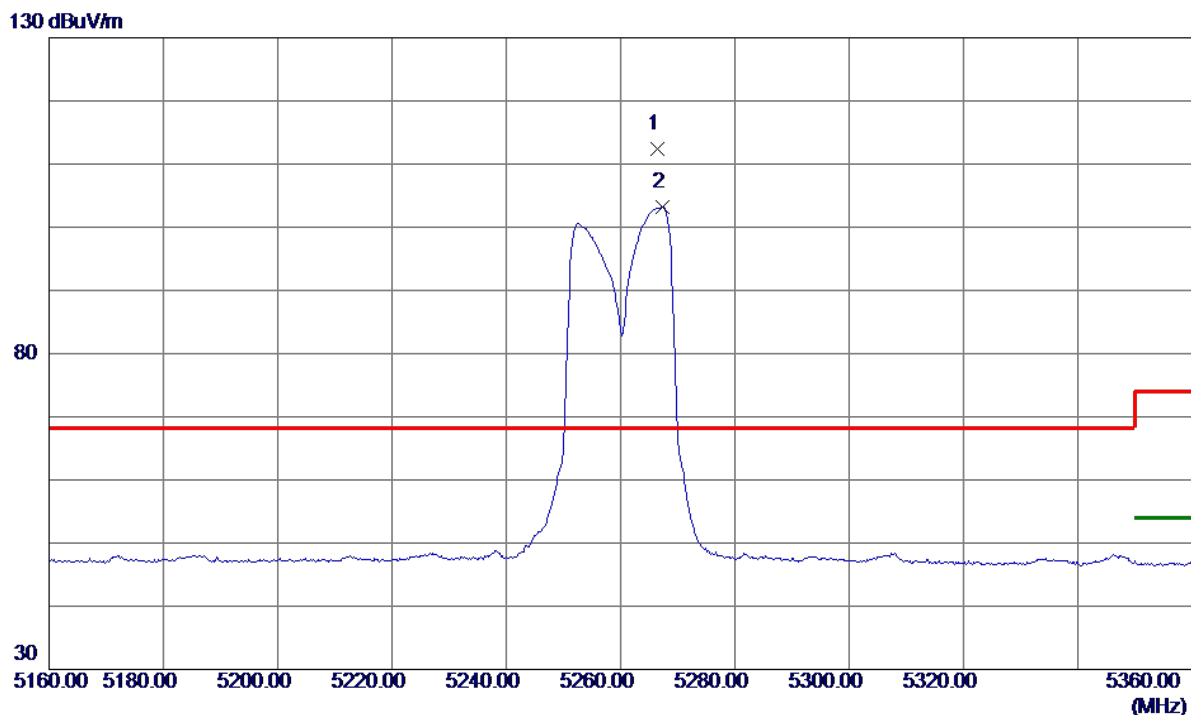


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5266.4000    | 96.96                      | 15.53                   | 112.49                    | 68.20           | 44.29        | Peak     | No Limit |
| 2   | 5267.4000    | 87.70                      | 15.53                   | 103.23                    | 999.00          | -895.77      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5260 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

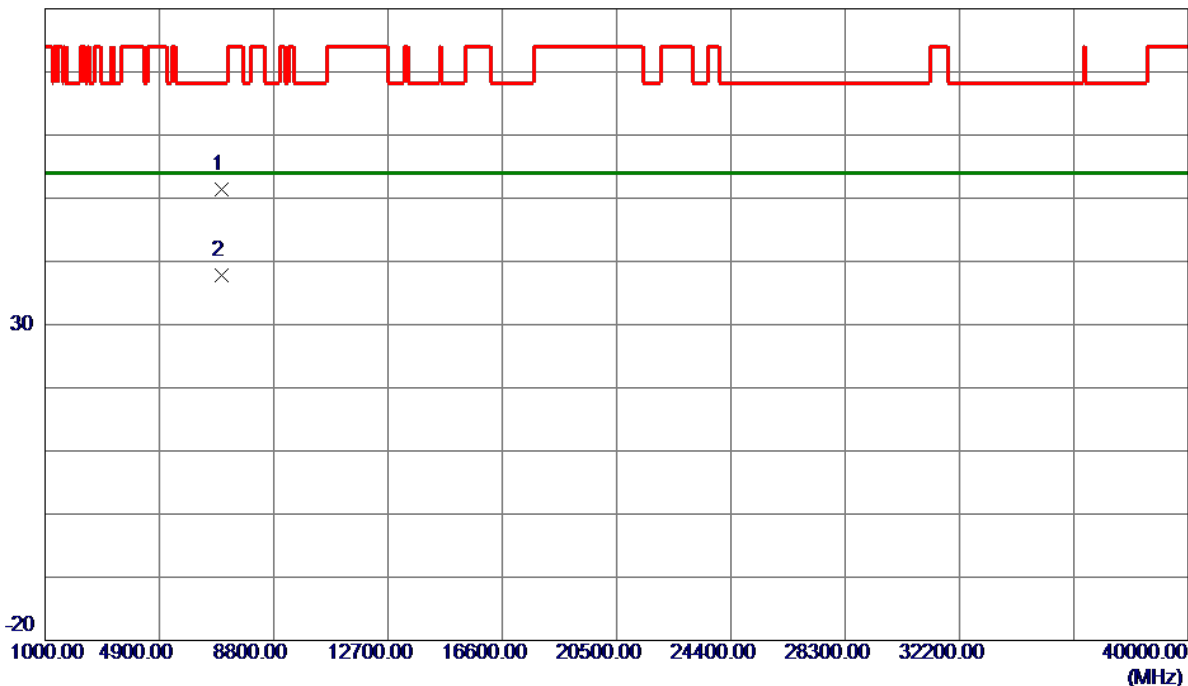


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7012.9780    | 41.51                      | 9.81                    | 51.32                     | 68.20           | -16.88       | Peak     |         |
| 2 * | 7013.8140    | 27.93                      | 9.81                    | 37.74                     | 54.00           | -16.26       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5300 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

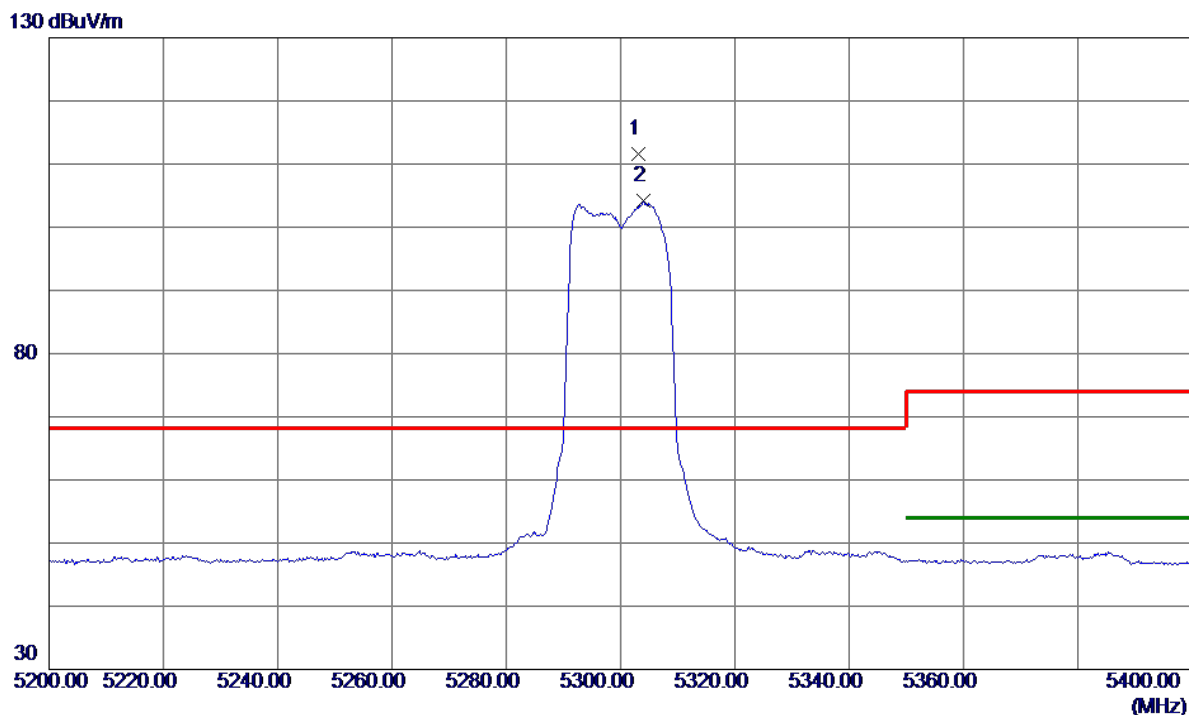


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5303.2000    | 96.00                      | 15.61                   | 111.61                    | 68.20           | 43.41        | Peak     | No Limit |
| 2   | 5304.0000    | 88.51                      | 15.62                   | 104.13                    | 999.00          | -894.87      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5300 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

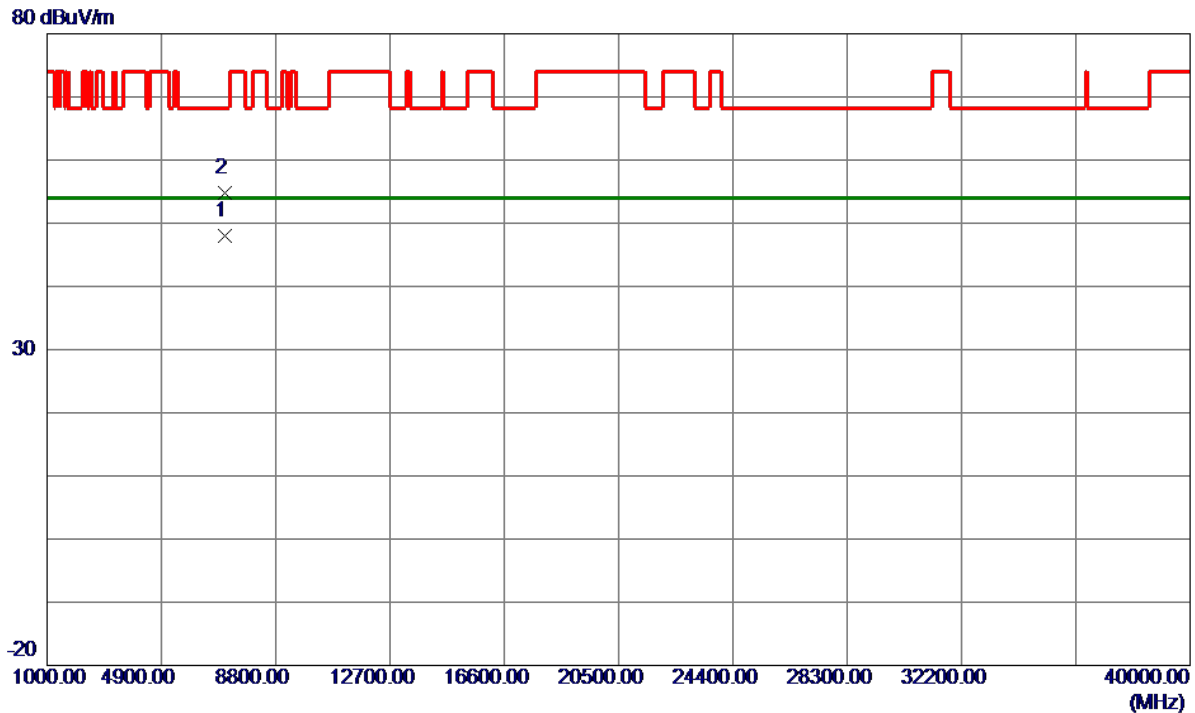


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7066.7450    | 38.08                      | 9.90                    | 47.98                     | 54.00           | -6.02        | AVG      |         |
| 2   | 7066.8600    | 44.98                      | 9.90                    | 54.88                     | 68.20           | -13.32       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5300 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

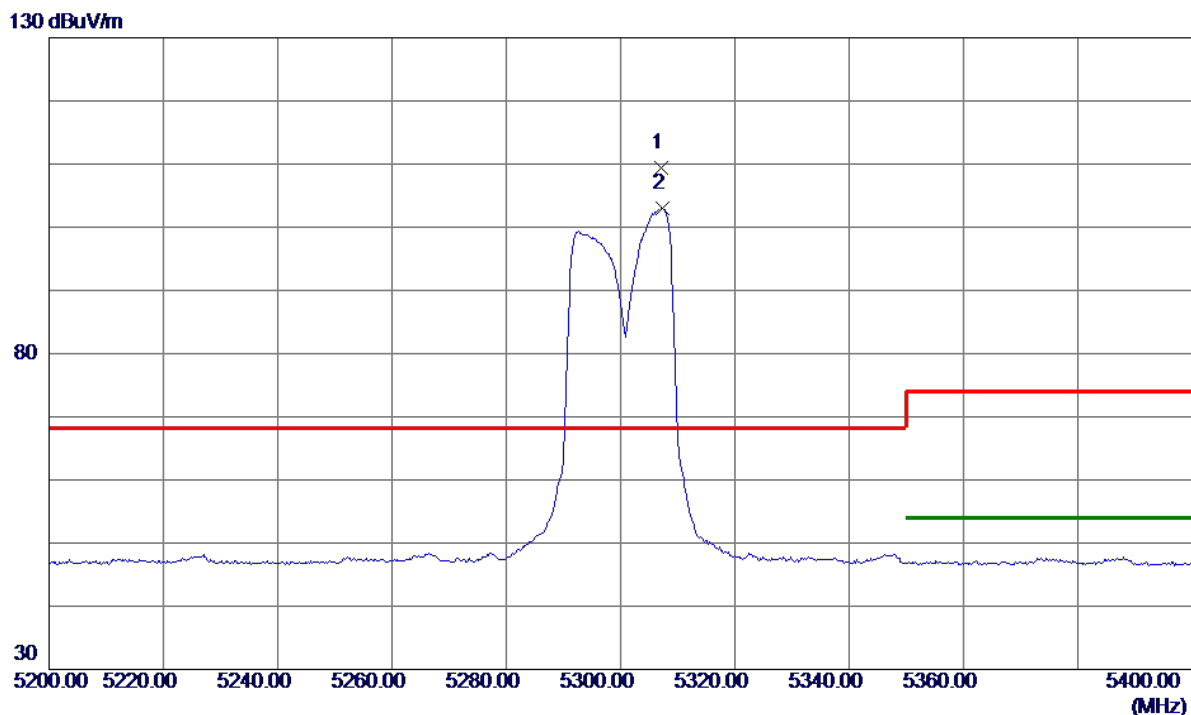


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5307.2000    | 93.75                      | 15.62                   | 109.37                    | 68.20           | 41.17        | Peak     | No Limit |
| 2   | 5307.4000    | 87.48                      | 15.62                   | 103.10                    | 999.00          | -895.90      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5300 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

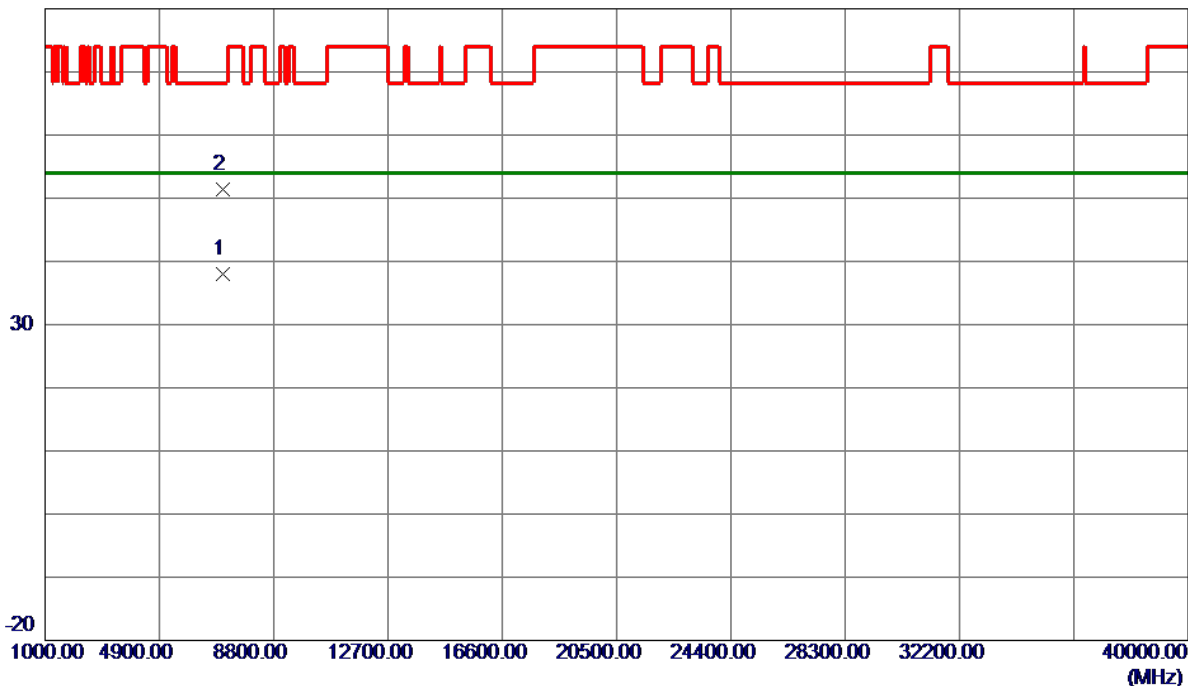


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7066.0540    | 28.18                      | 9.90                    | 38.08                     | 54.00           | -15.92       | AVG      |         |
| 2   | 7067.9440    | 41.56                      | 9.91                    | 51.47                     | 68.20           | -16.73       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5320 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

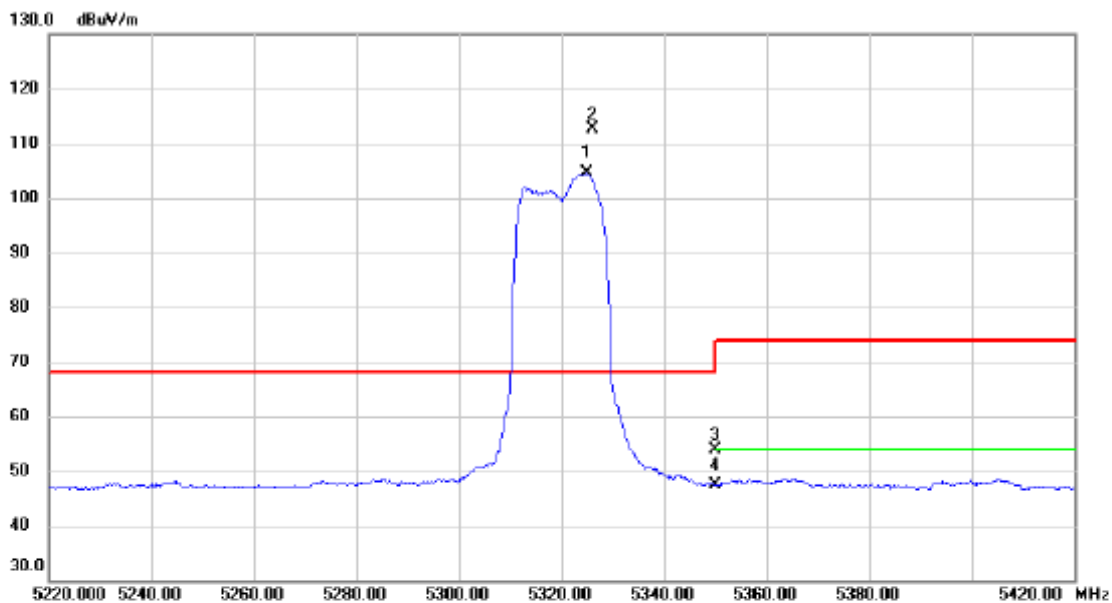


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5325.000     | 88.94                    | 15.67                   | 104.61                     | 68.20           | 36.41        | AVG      | No Limit |
| 2   | *   | 5326.000     | 96.92                    | 15.67                   | 112.59                     | 68.20           | 44.39        | peak     | No Limit |
| 3   |     | 5350.000     | 38.24                    | 15.72                   | 53.96                      | 74.00           | -20.04       | peak     |          |
| 4   |     | 5350.000     | 31.74                    | 15.72                   | 47.46                      | 54.00           | -6.54        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2A_TX A Mode 5320 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

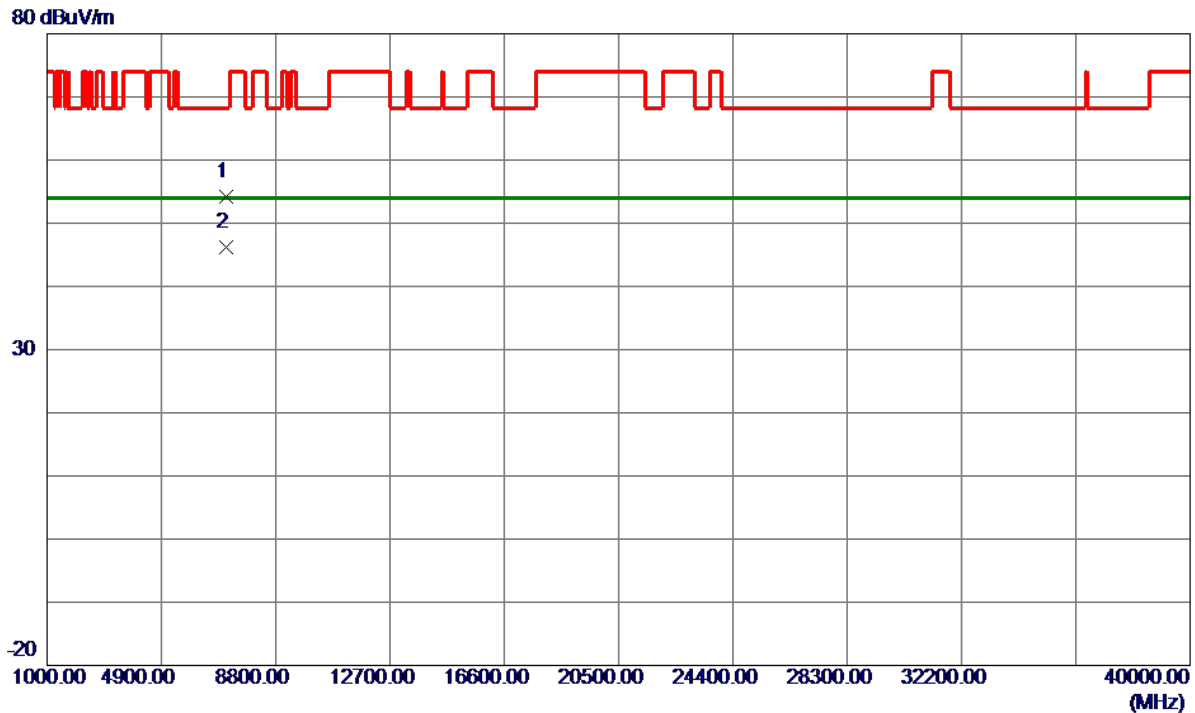


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 7093.1850 | 44.21         | 9.95           | 54.16       | 68.20  | -14.04 | Peak     |         |
| 2 * | 7093.3200 | 36.20         | 9.95           | 46.15       | 54.00  | -7.85  | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5320 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

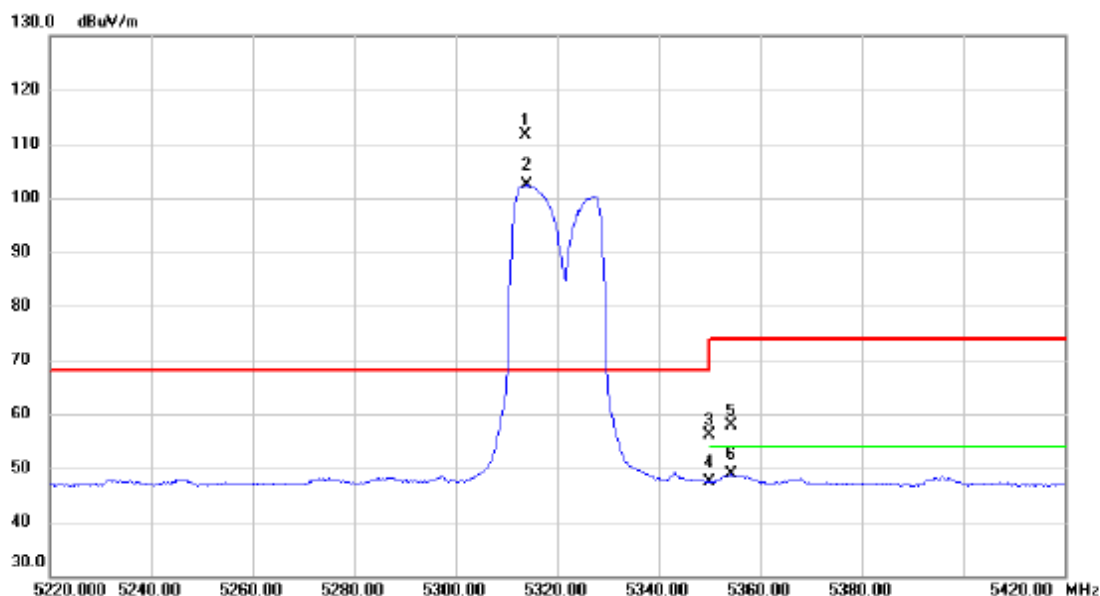


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5313.600     | 95.95                    | 15.63                   | 111.58                     | 68.20           | 43.38        | peak     | No Limit |
| 2   | X   | 5314.000     | 86.73                    | 15.64                   | 102.37                     | 68.20           | 34.17        | AVG      | No Limit |
| 3   |     | 5350.000     | 40.29                    | 15.72                   | 56.01                      | 74.00           | -17.99       | peak     |          |
| 4   |     | 5350.000     | 31.70                    | 15.72                   | 47.42                      | 54.00           | -6.58        | AVG      |          |
| 5   |     | 5354.400     | 42.24                    | 15.73                   | 57.97                      | 74.00           | -16.03       | peak     |          |
| 6   |     | 5354.400     | 33.06                    | 15.73                   | 48.79                      | 54.00           | -5.21        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2A_TX A Mode 5320 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

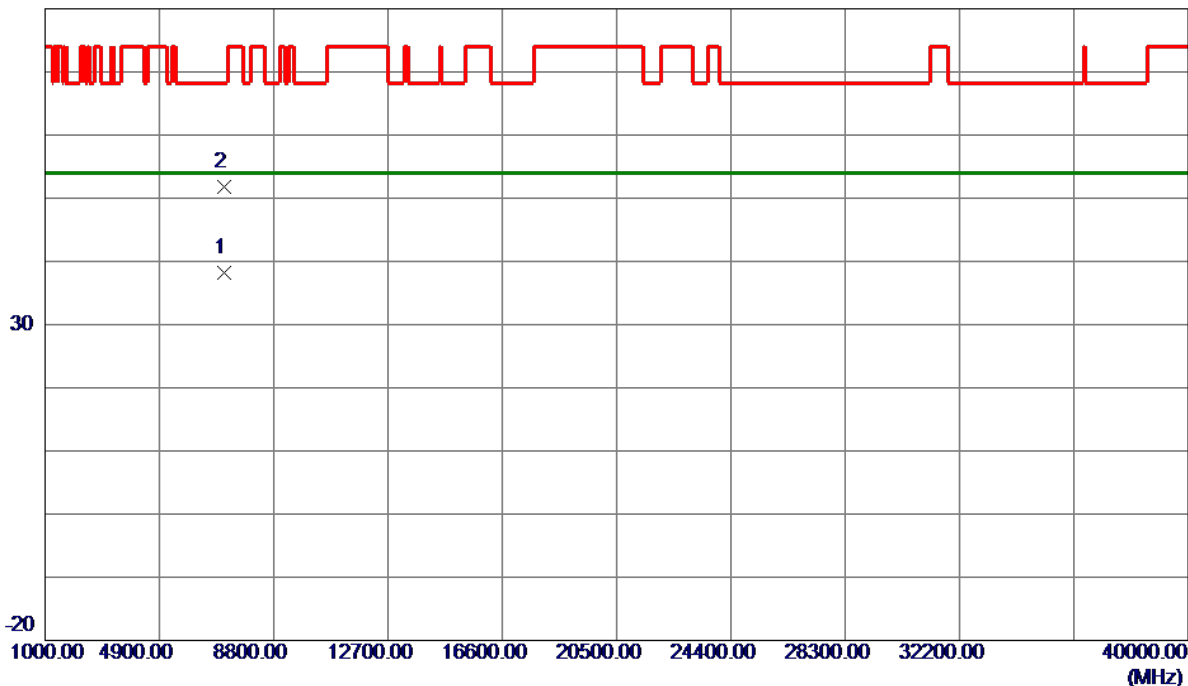


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7093.0900    | 28.29                      | 9.95                    | 38.24                     | 54.00           | -15.76       | AVG      |         |
| 2   | 7093.1320    | 41.83                      | 9.95                    | 51.78                     | 68.20           | -16.42       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

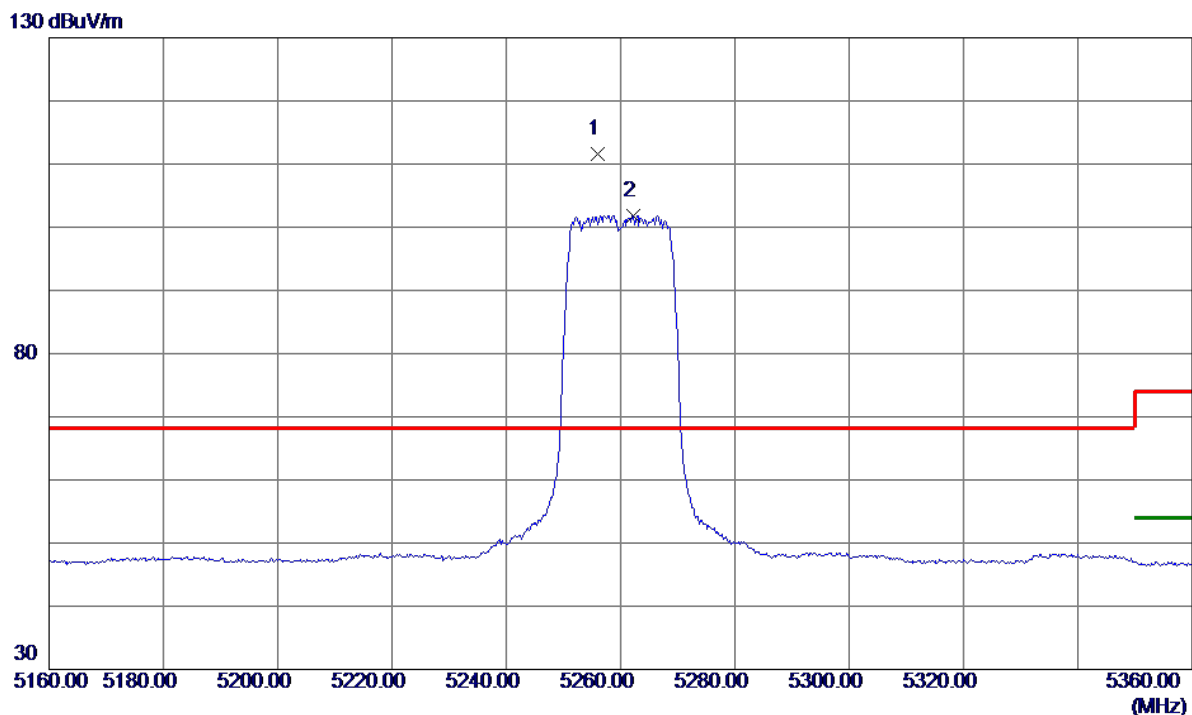


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5256.0000    | 96.15                      | 15.51                   | 111.66                    | 68.20           | 43.46        | Peak     | No Limit |
| 2   | 5262.2000    | 86.37                      | 15.52                   | 101.89                    | 999.00          | -897.11      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

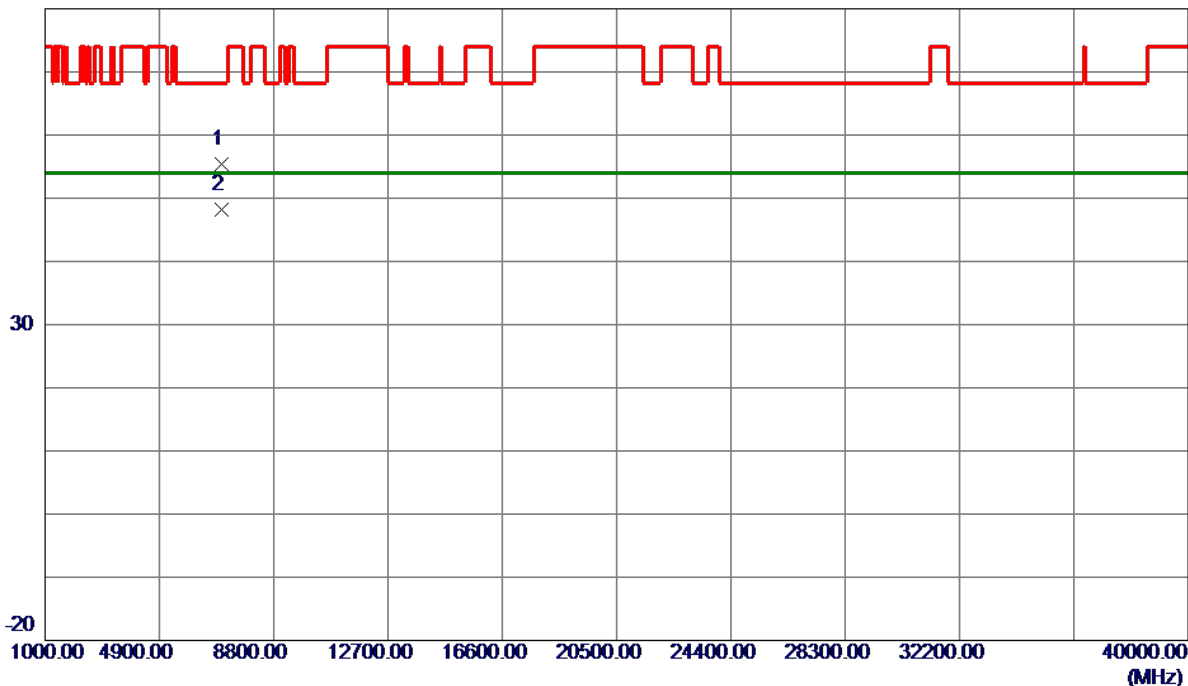


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7012.9900    | 45.66                      | 9.81                    | 55.47                     | 68.20           | -12.73       | Peak     |         |
| 2 * | 7013.3200    | 38.31                      | 9.81                    | 48.12                     | 54.00           | -5.88        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

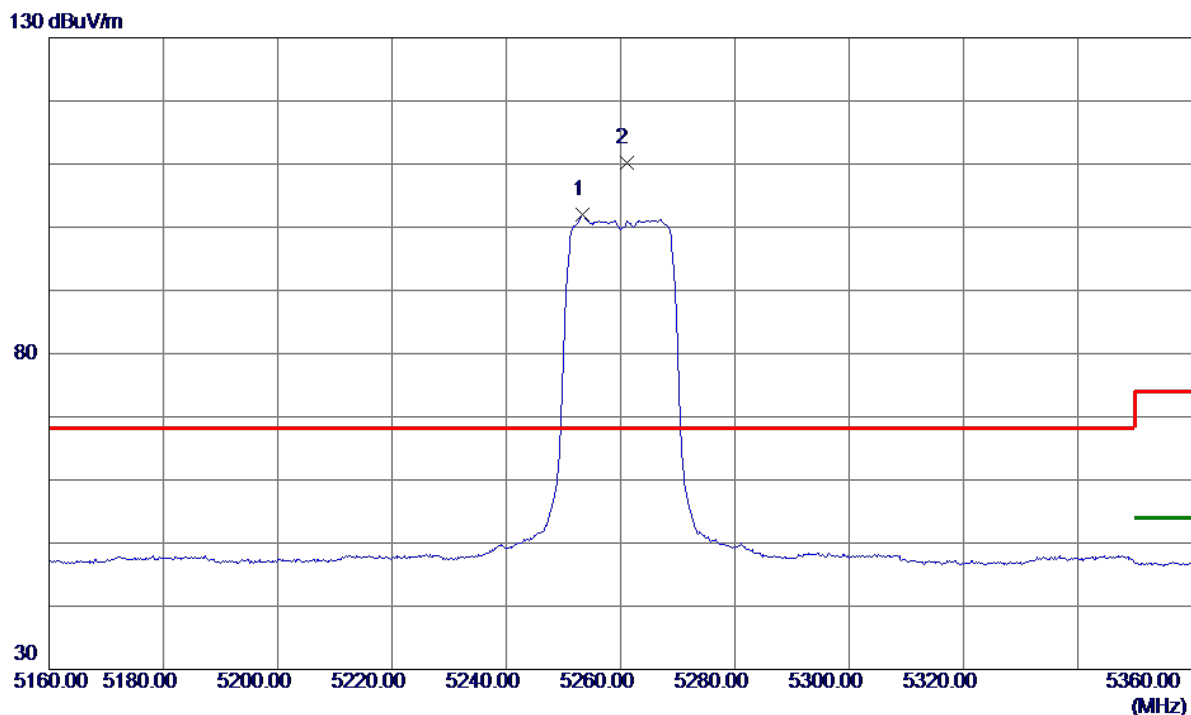


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5253.4000    | 86.49                      | 15.50                   | 101.99                    | 999.00          | -897.01      | AVG      | No Limit |
| 2 * | 5261.0000    | 94.71                      | 15.52                   | 110.23                    | 68.20           | 42.03        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

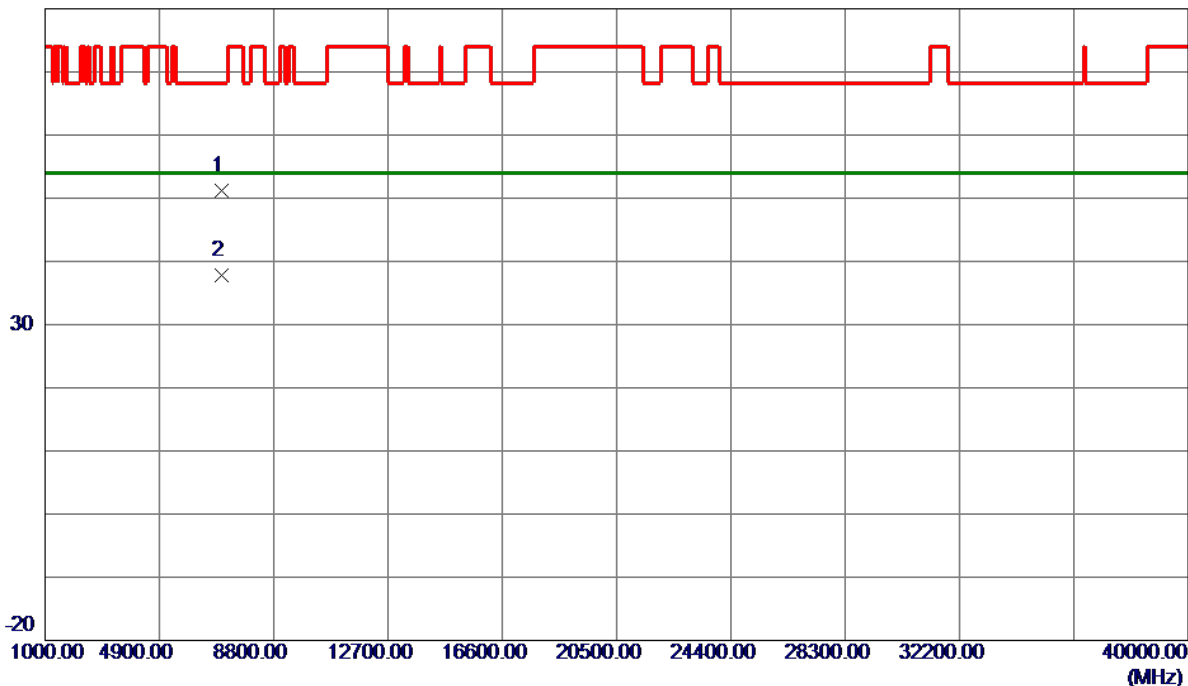


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7012.6100    | 41.39                      | 9.81                    | 51.20                     | 68.20           | -17.00       | Peak     |         |
| 2 * | 7012.7100    | 27.92                      | 9.81                    | 37.73                     | 54.00           | -16.27       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

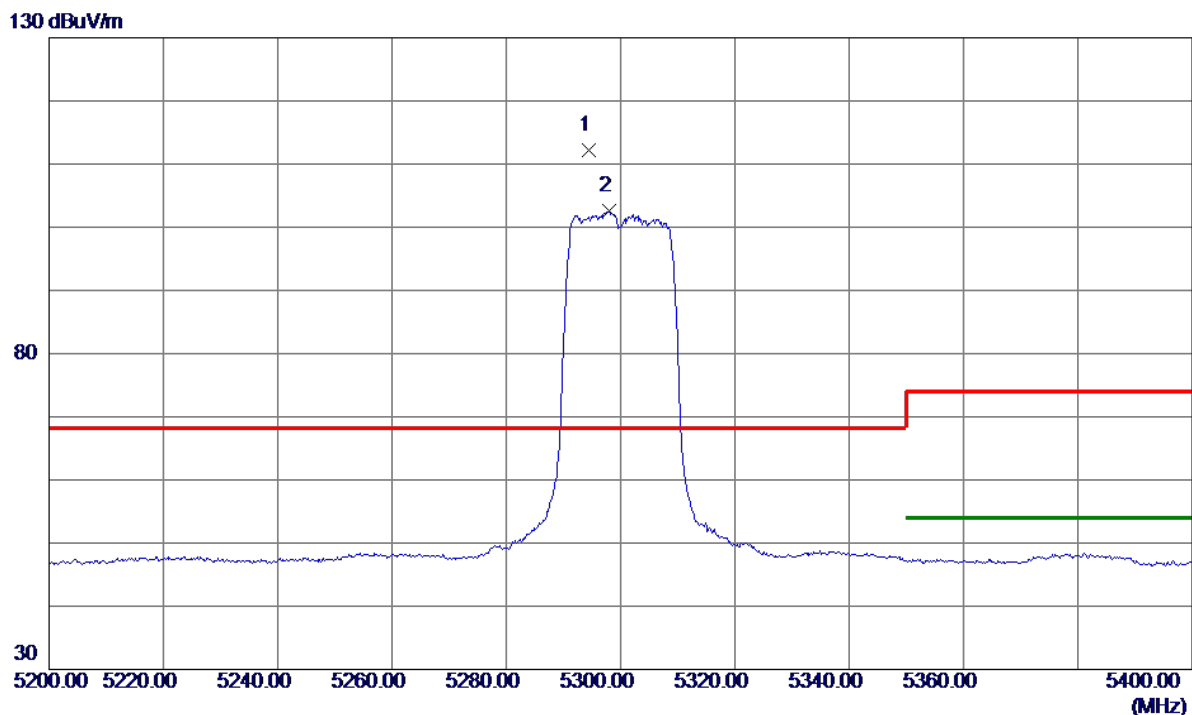


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5294.4000    | 96.64                      | 15.59                   | 112.23                    | 68.20           | 44.03        | Peak     | No Limit |
| 2   | 5298.0000    | 86.99                      | 15.60                   | 102.59                    | 999.00          | -896.41      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

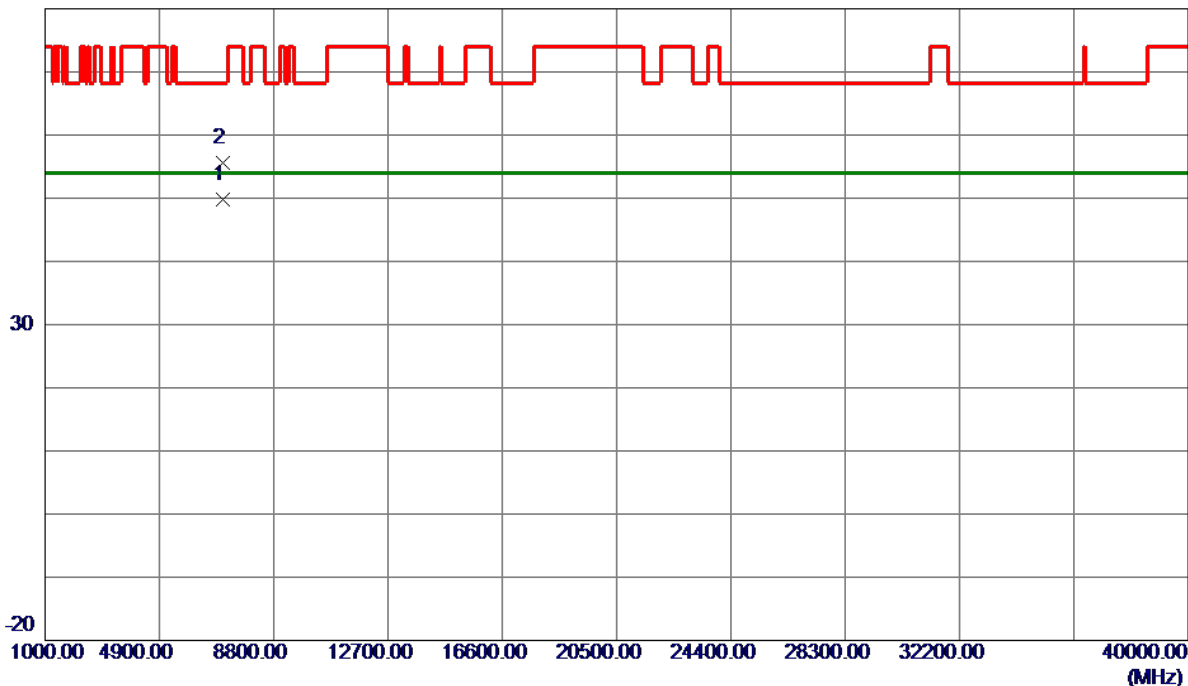


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7066.6200    | 39.96                      | 9.90                    | 49.86                     | 54.00           | -4.14        | AVG      |         |
| 2   | 7066.6550    | 45.68                      | 9.90                    | 55.58                     | 68.20           | -12.62       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

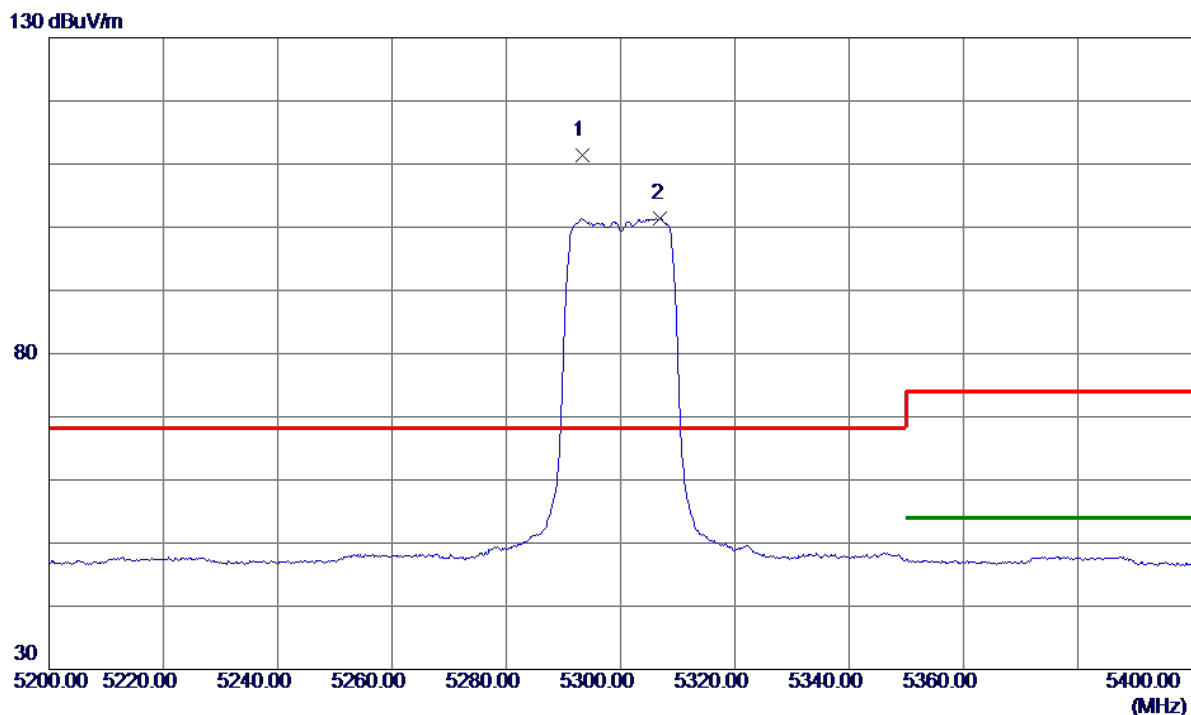


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5293.4000    | 95.87                      | 15.59                   | 111.46                    | 68.20           | 43.26        | Peak     | No Limit |
| 2   | 5307.0000    | 85.80                      | 15.62                   | 101.42                    | 999.00          | -897.58      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

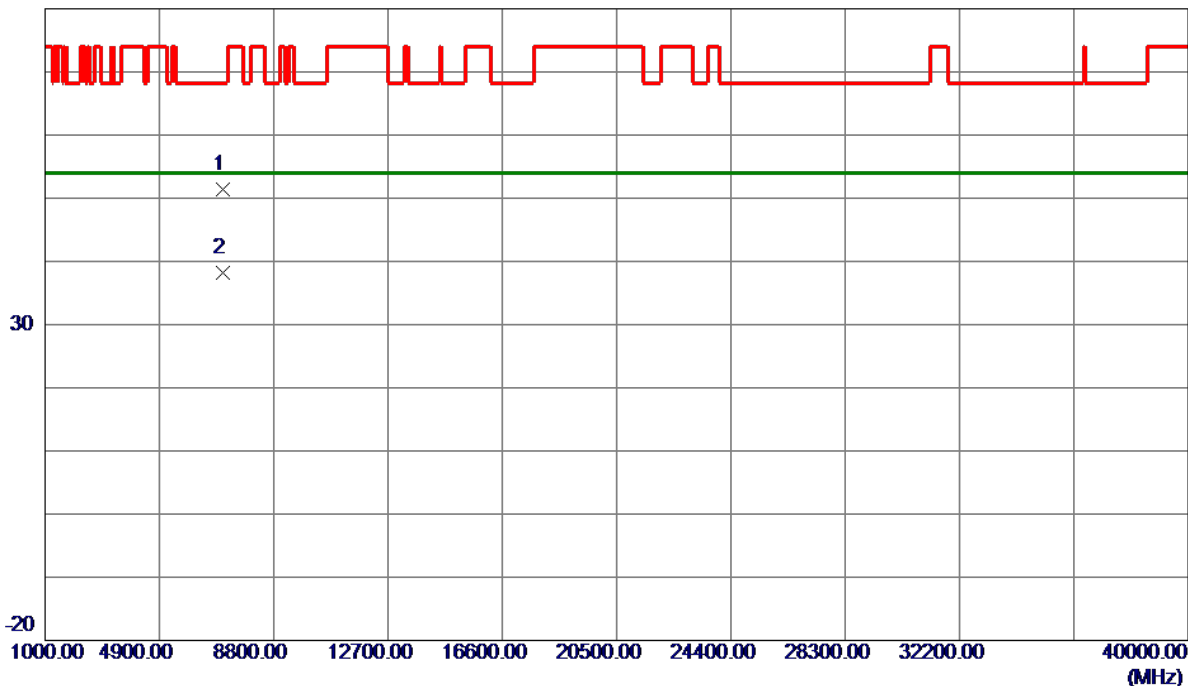


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 7066.1160 | 41.44         | 9.90           | 51.34       | 68.20  | -16.86 | Peak     |         |
| 2 * | 7066.8440 | 28.21         | 9.90           | 38.11       | 54.00  | -15.89 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

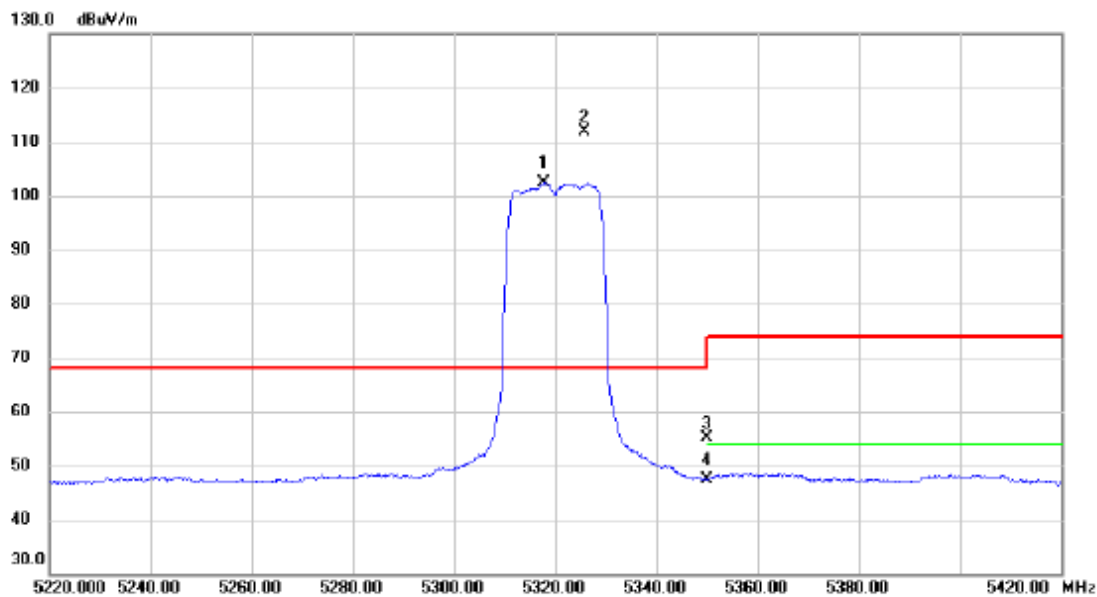


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5317.800     | 86.68                    | 15.64                   | 102.32                     | 68.20           | 34.12        | AVG      | No Limit |
| 2   | *   | 5325.800     | 96.21                    | 15.67                   | 111.88                     | 68.20           | 43.68        | peak     | No Limit |
| 3   |     | 5350.000     | 39.42                    | 15.72                   | 55.14                      | 74.00           | -18.86       | peak     |          |
| 4   |     | 5350.000     | 31.71                    | 15.72                   | 47.43                      | 54.00           | -6.57        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

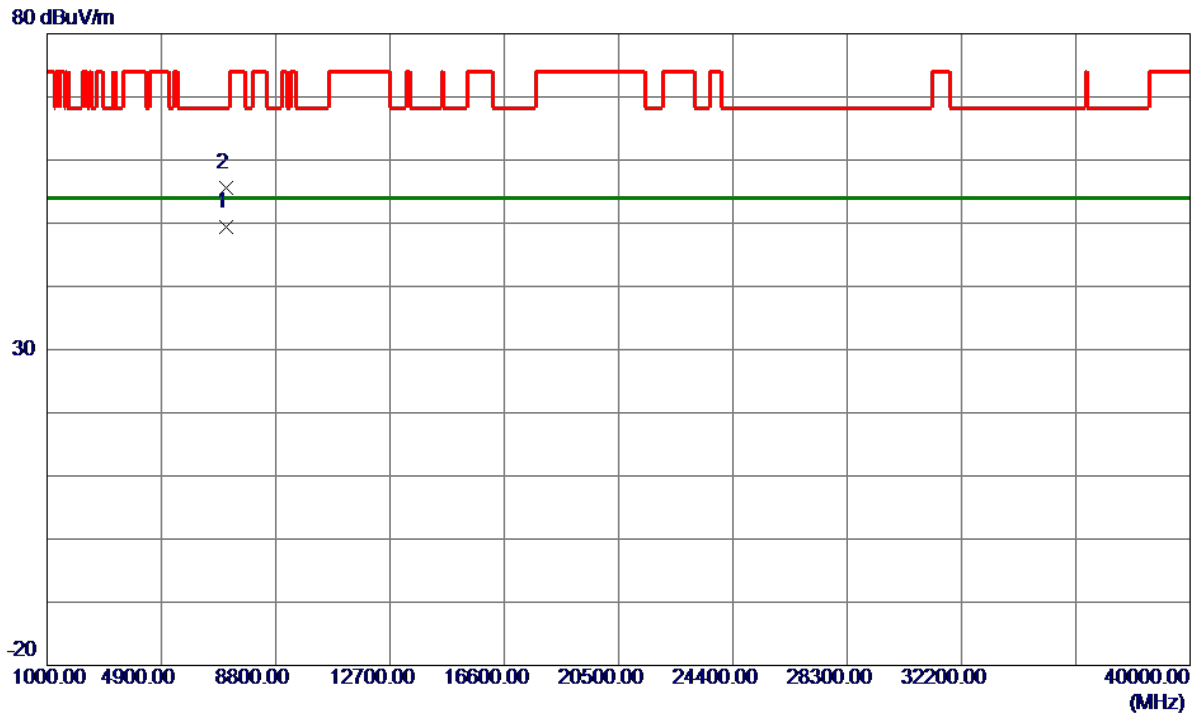


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7093.3050    | 39.49                      | 9.95                    | 49.44                     | 54.00           | -4.56        | AVG      |         |
| 2   | 7093.3350    | 45.56                      | 9.95                    | 55.51                     | 68.20           | -12.69       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

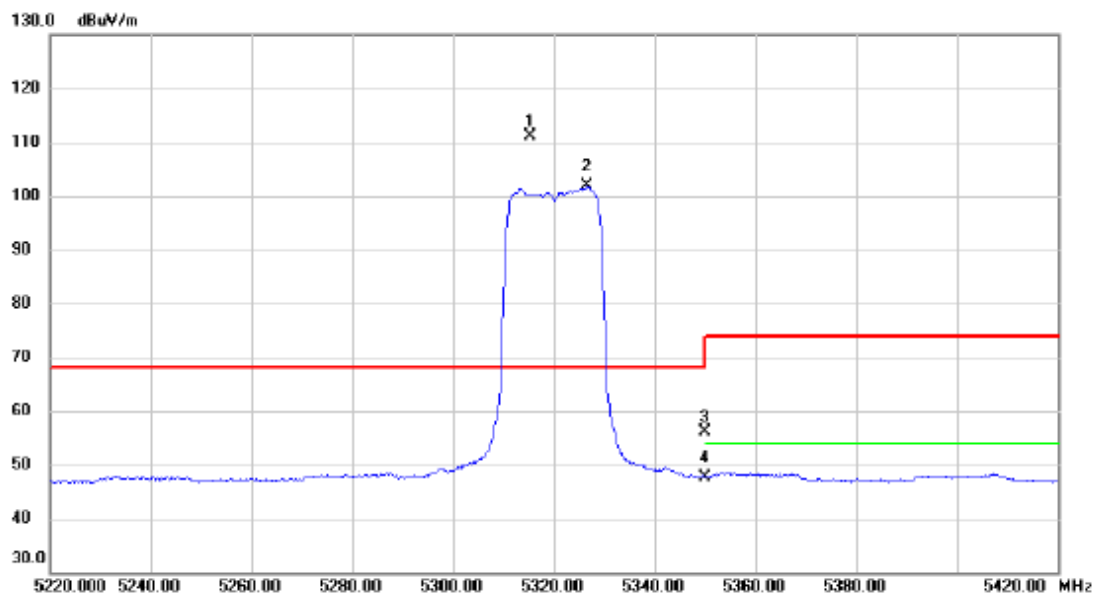

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5315.400     | 95.55                    | 15.64                   | 111.19                     | 68.20           | 42.99        | peak     | No Limit |
| 2   | X   | 5326.600     | 86.24                    | 15.67                   | 101.91                     | 68.20           | 33.71        | AVG      | No Limit |
| 3   |     | 5350.000     | 40.32                    | 15.72                   | 56.04                      | 74.00           | -17.96       | peak     |          |
| 4   |     | 5350.000     | 31.89                    | 15.72                   | 47.61                      | 54.00           | -6.39        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

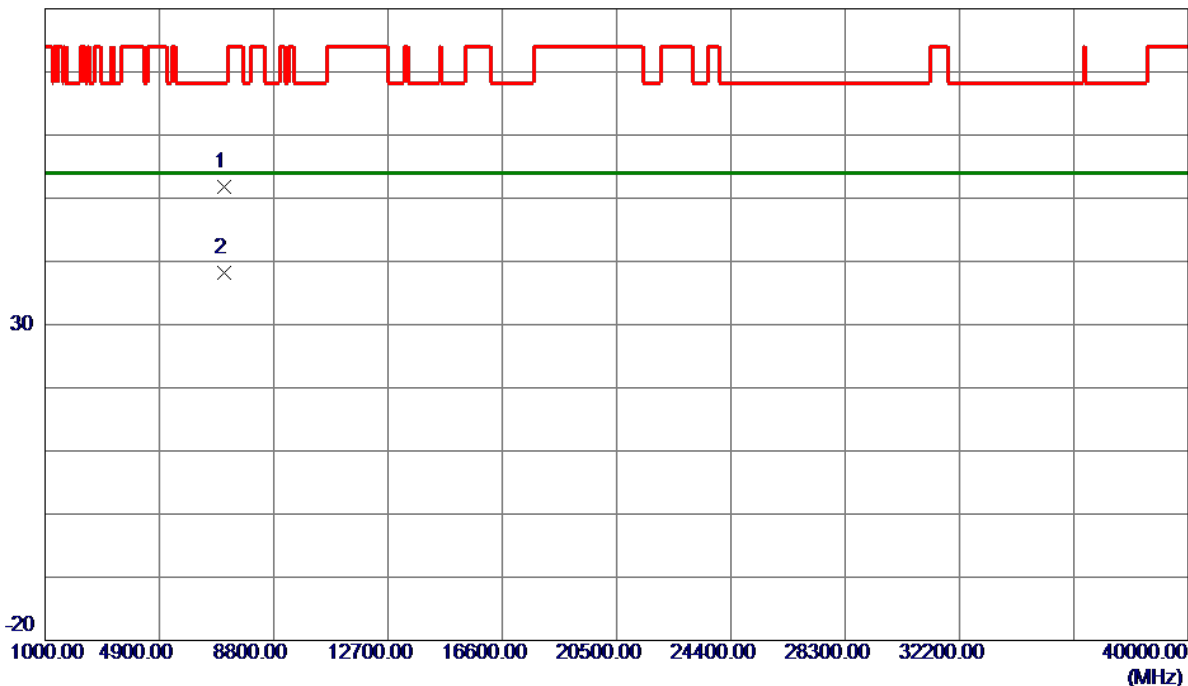


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7092.4260    | 41.82                      | 9.95                    | 51.77                     | 68.20           | -16.43       | Peak     |         |
| 2 * | 7093.4620    | 28.23                      | 9.95                    | 38.18                     | 54.00           | -15.82       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

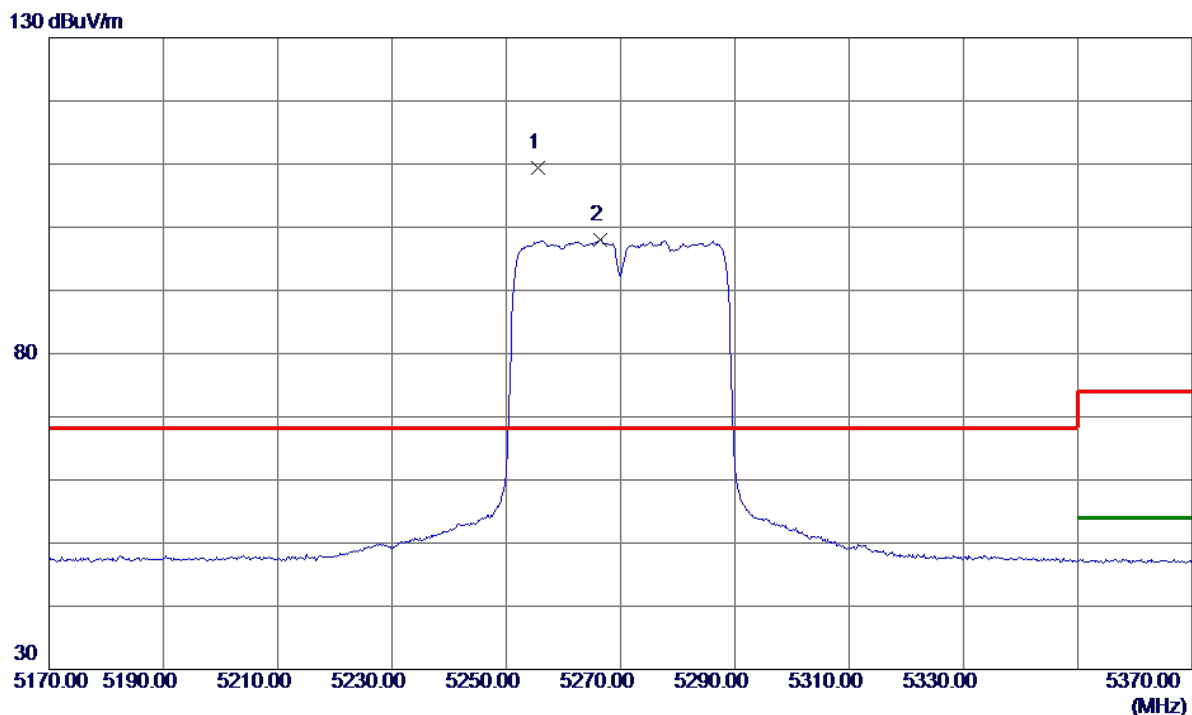


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5255.6000    | 93.84                      | 15.51                   | 109.35                    | 68.20           | 41.15        | Peak     | No Limit |
| 2   | 5266.4000    | 82.49                      | 15.53                   | 98.02                     | 999.00          | -900.98      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

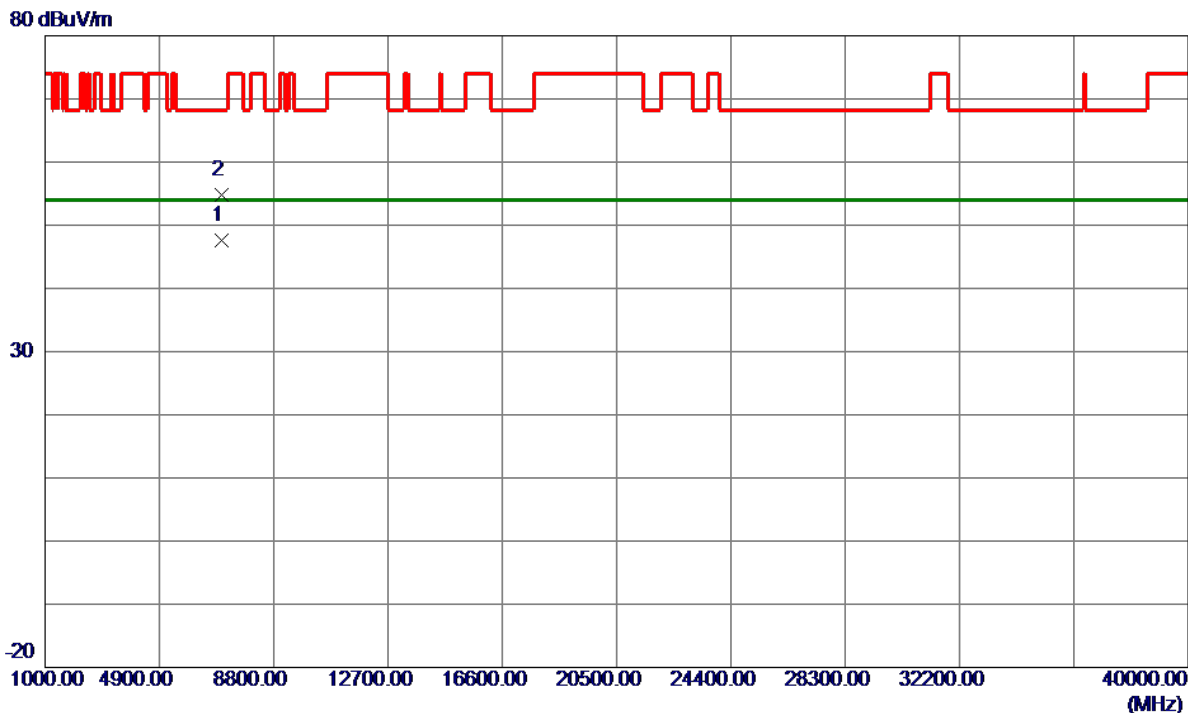


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7026.5500    | 37.76                      | 9.84                    | 47.60                     | 54.00           | -6.40        | AVG      |         |
| 2   | 7026.6400    | 44.99                      | 9.84                    | 54.83                     | 68.20           | -13.37       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

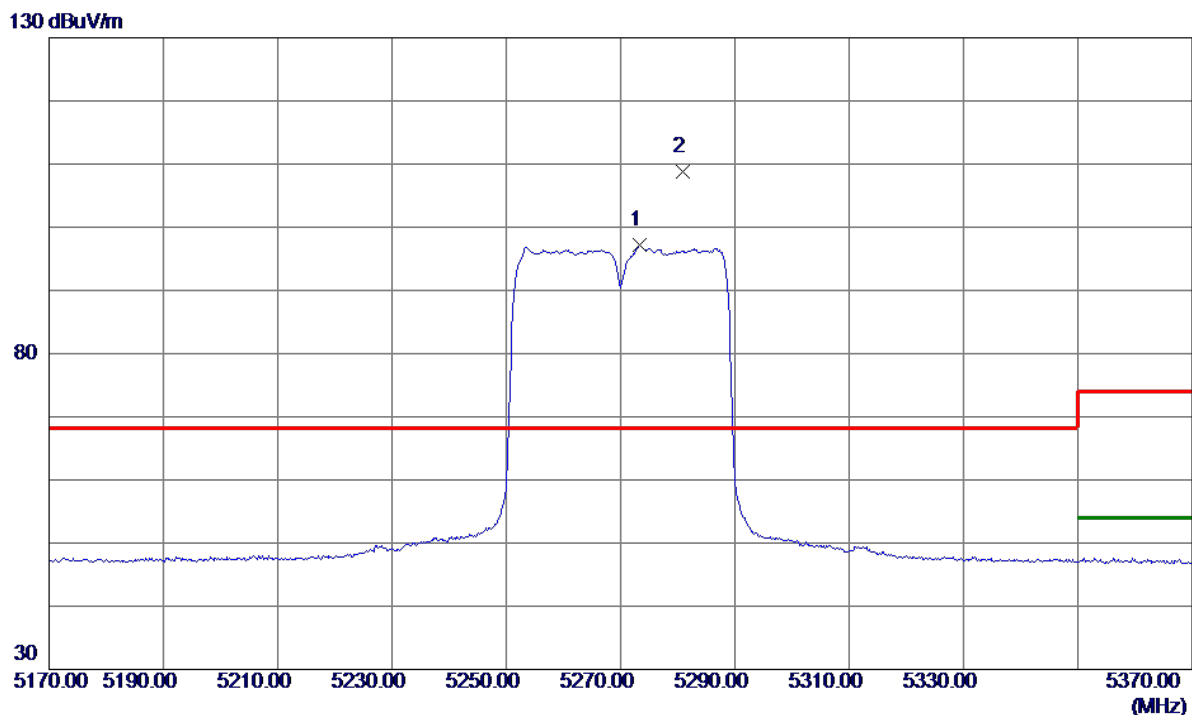


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5273.4000    | 81.58                      | 15.55                   | 97.13                     | 999.00          | -901.87      | AVG      | No Limit |
| 2 * | 5280.8000    | 93.24                      | 15.56                   | 108.80                    | 68.20           | 40.60        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

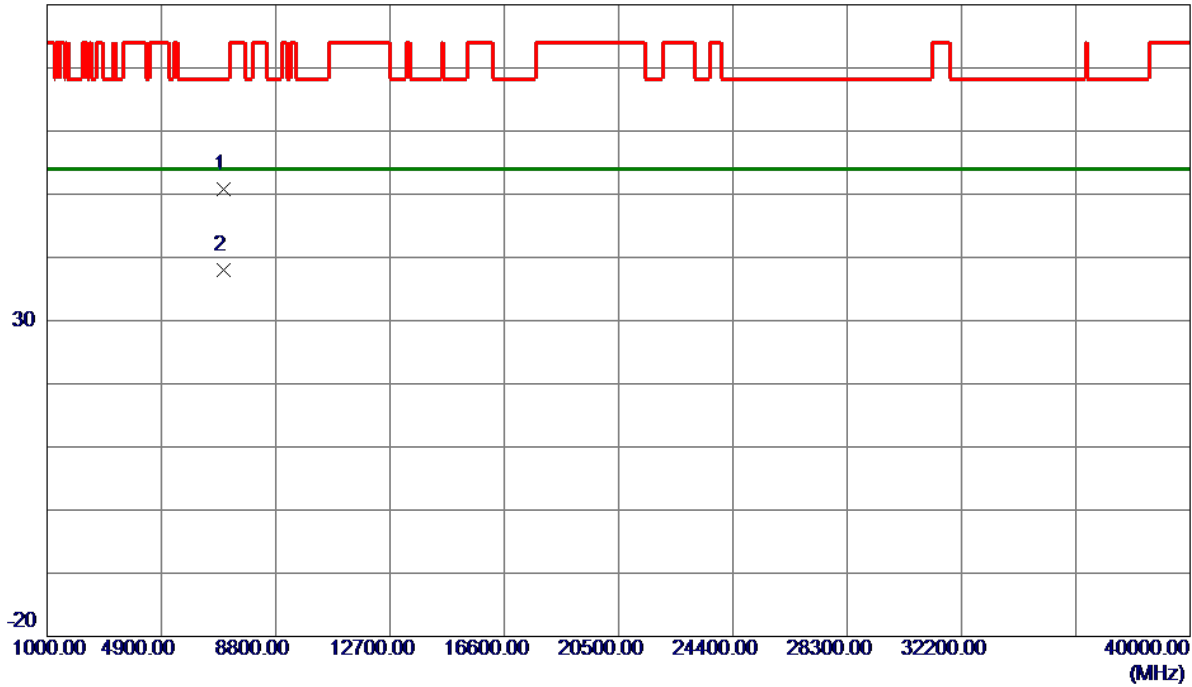


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7026.6780    | 41.04                      | 9.84                    | 50.88                     | 68.20           | -17.32       | Peak     |         |
| 2 * | 7027.1000    | 28.17                      | 9.84                    | 38.01                     | 54.00           | -15.99       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5310 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

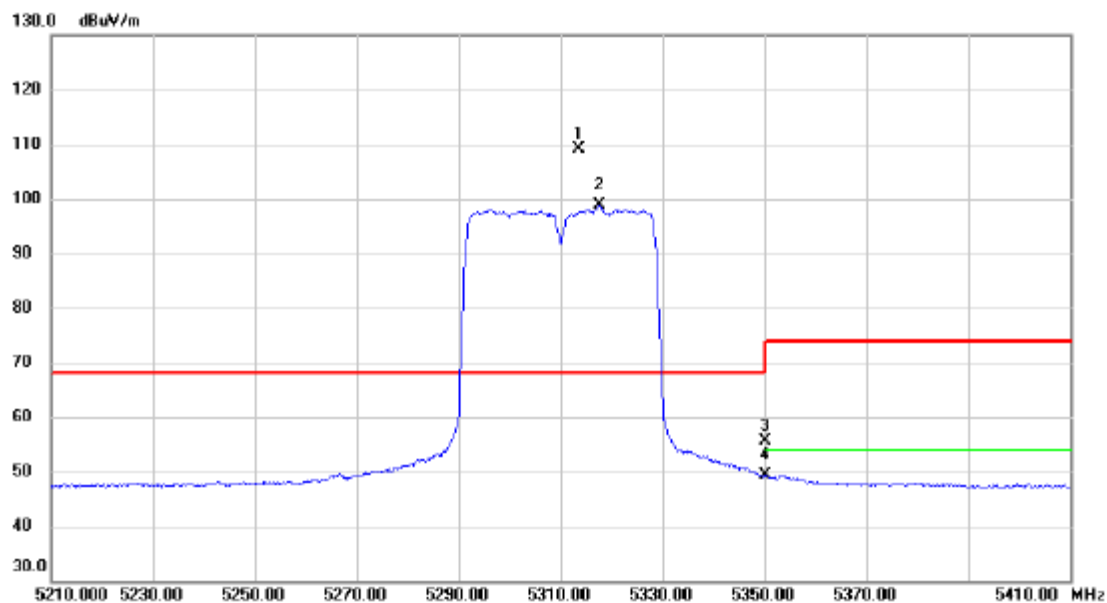


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1 *     | 5313.600     | 93.53                    | 15.63                   | 109.16                     | 68.20           | 40.96        | peak     | No Limit |
| 2 X     | 5317.600     | 83.14                    | 15.64                   | 98.78                      | 68.20           | 30.58        | AVG      | No Limit |
| 3       | 5350.000     | 39.88                    | 15.72                   | 55.60                      | 74.00           | -18.40       | peak     |          |
| 4       | 5350.000     | 33.57                    | 15.72                   | 49.29                      | 54.00           | -4.71        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5310 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

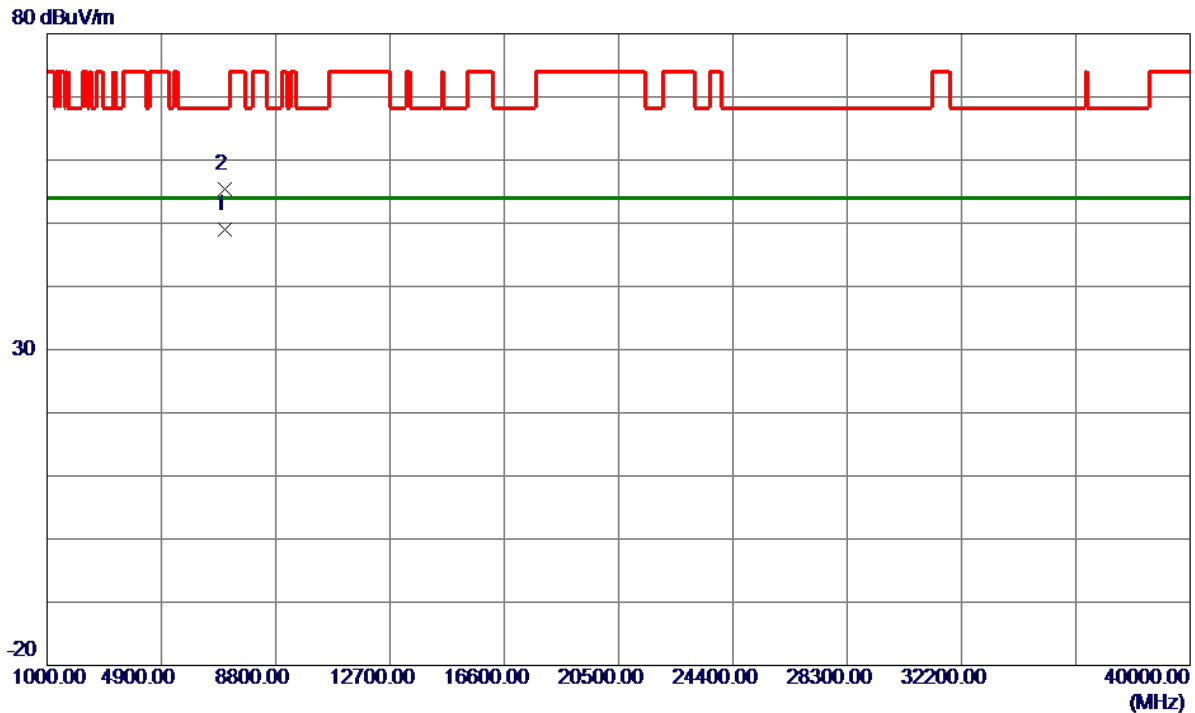


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7079.9800    | 39.04                      | 9.93                    | 48.97                     | 54.00           | -5.03        | AVG      |         |
| 2   | 7080.1750    | 45.48                      | 9.93                    | 55.41                     | 68.20           | -12.79       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5310 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

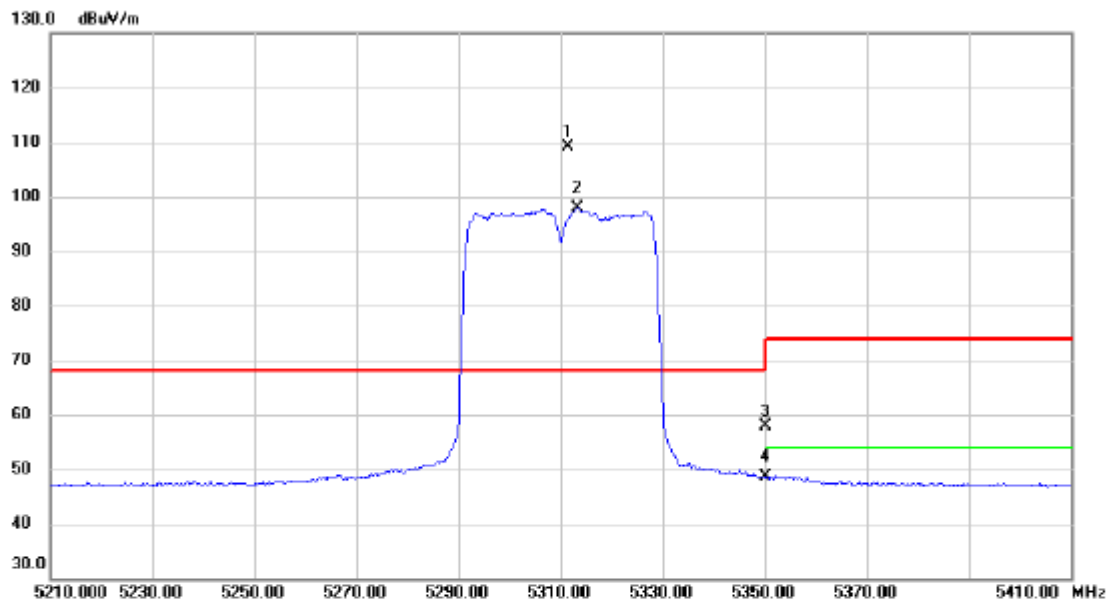


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5311.400     | 93.62                    | 15.63                   | 109.25                     | 68.20           | 41.05        | peak     | No Limit |
| 2   | X   | 5313.400     | 82.22                    | 15.63                   | 97.85                      | 68.20           | 29.65        | AVG      | No Limit |
| 3   |     | 5350.000     | 42.16                    | 15.72                   | 57.88                      | 74.00           | -16.12       | peak     |          |
| 4   |     | 5350.000     | 32.88                    | 15.72                   | 48.60                      | 54.00           | -5.40        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5310 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

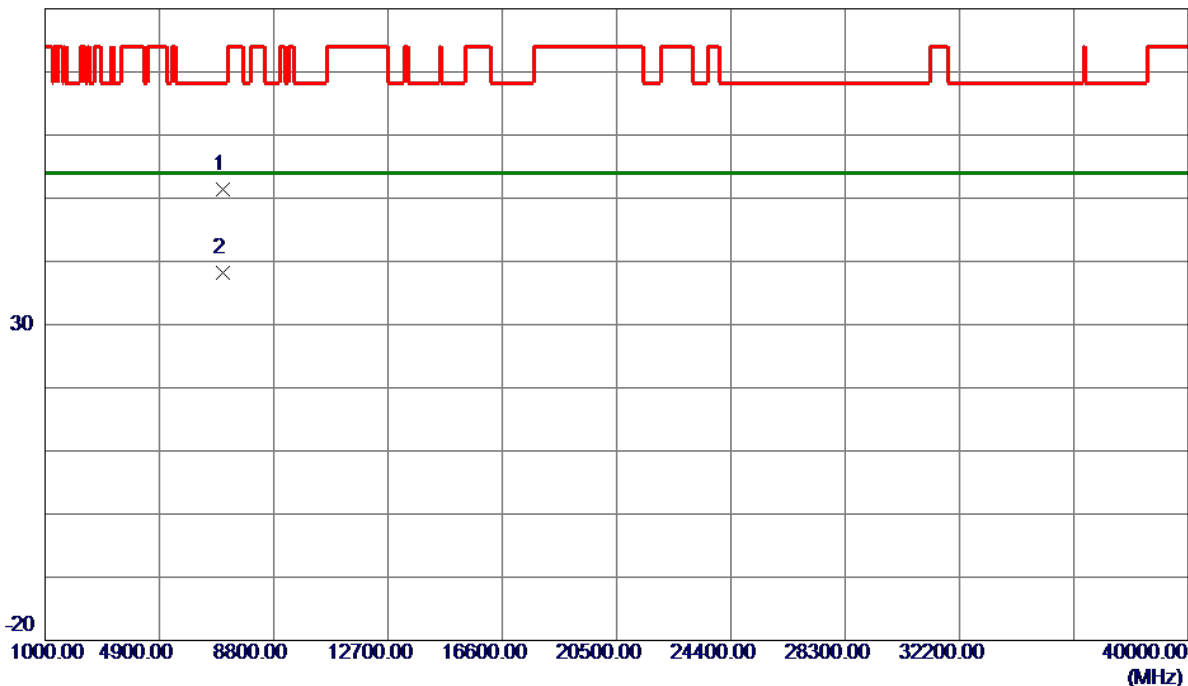


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7079.7680    | 41.40                      | 9.93                    | 51.33                     | 68.20           | -16.87       | Peak     |         |
| 2 * | 7080.5480    | 28.18                      | 9.93                    | 38.11                     | 54.00           | -15.89       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode 5290 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

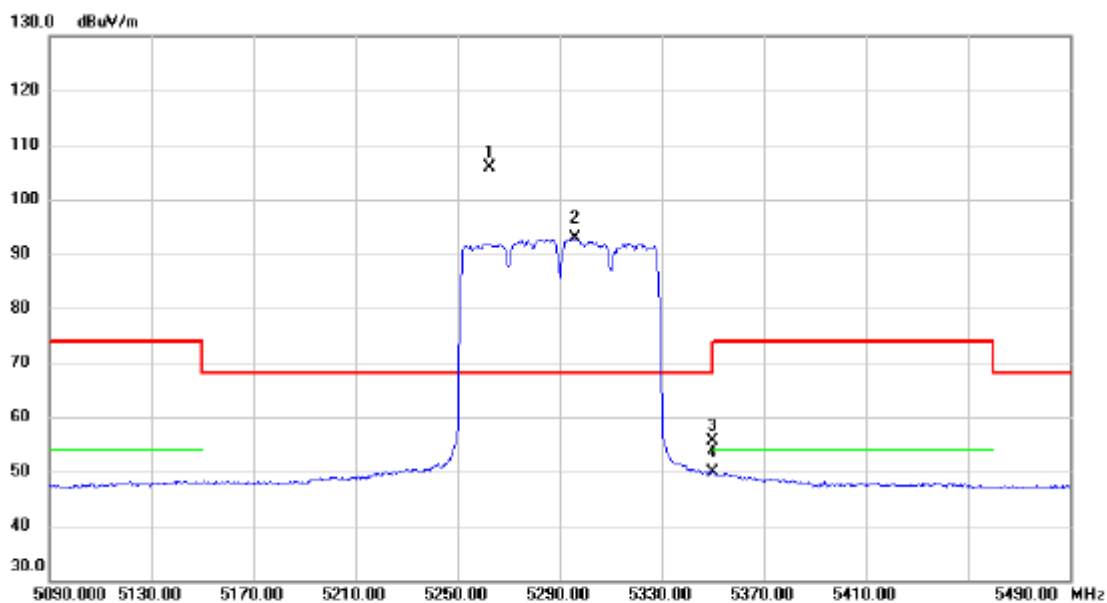


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5262.400     | 90.30                    | 15.52                   | 105.82                     | 68.20           | 37.62        | peak     | No Limit |
| 2   | X   | 5296.400     | 77.18                    | 15.60                   | 92.78                      | 68.20           | 24.58        | AVG      | No Limit |
| 3   |     | 5350.000     | 39.97                    | 15.72                   | 55.69                      | 74.00           | -18.31       | peak     |          |
| 4   |     | 5350.000     | 34.05                    | 15.72                   | 49.77                      | 54.00           | -4.23        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode 5290 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

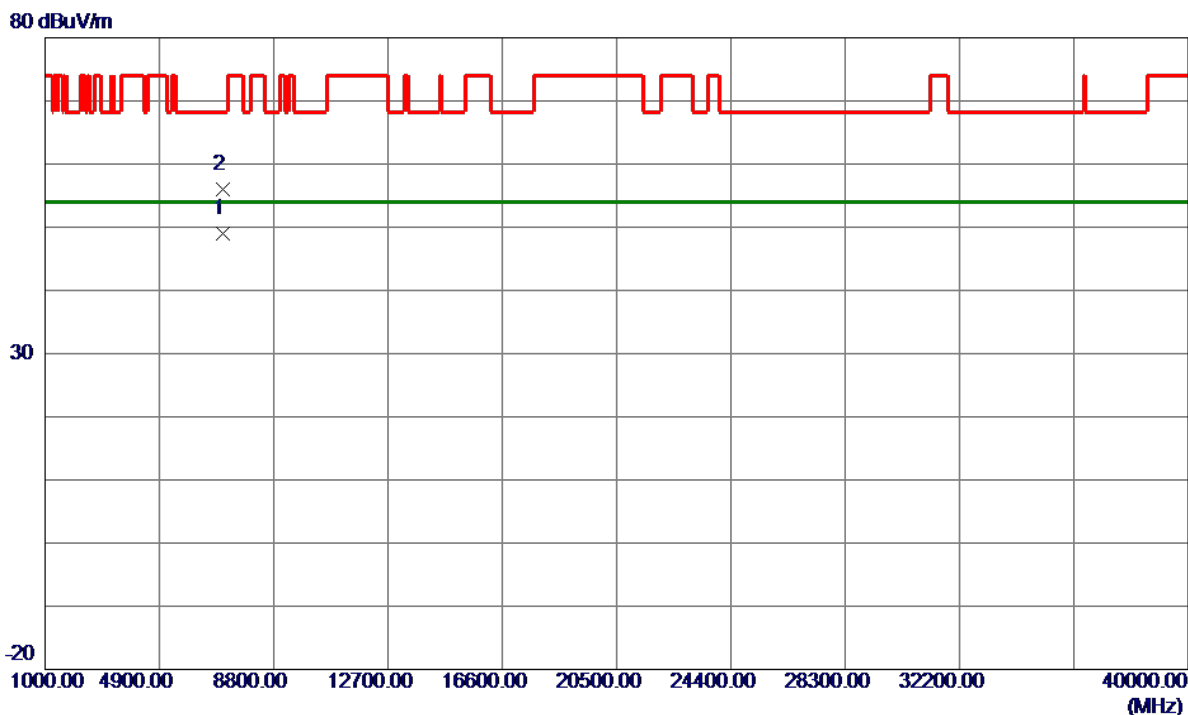


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7053.3250    | 39.11                      | 9.88                    | 48.99                     | 54.00           | -5.01        | AVG      |         |
| 2   | 7053.3450    | 46.09                      | 9.88                    | 55.97                     | 68.20           | -12.23       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode 5290 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

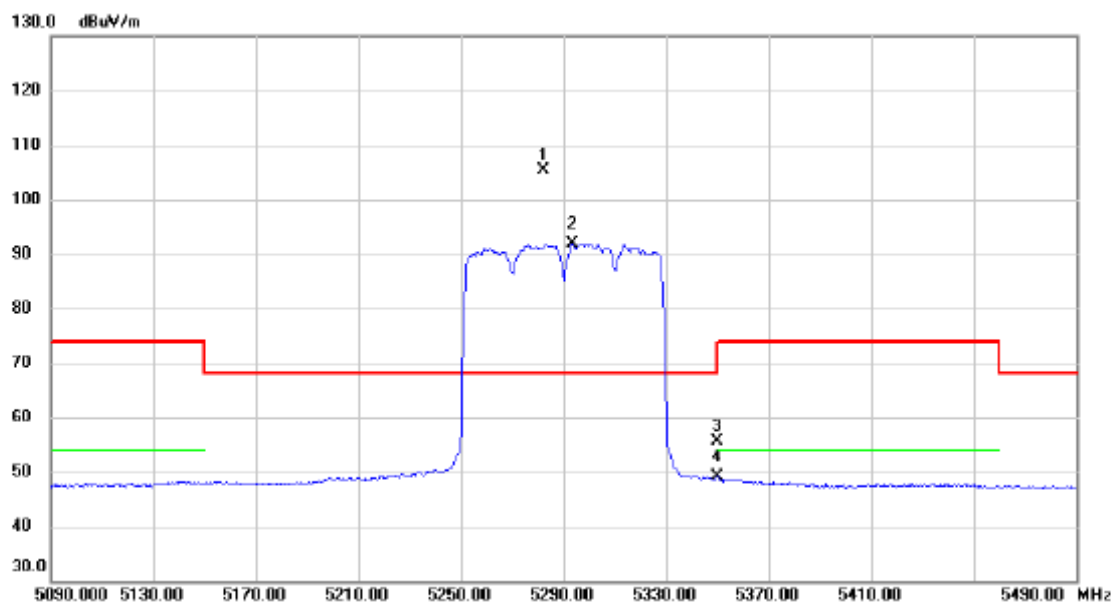


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5282.400     | 89.87                    | 15.57                   | 105.44                     | 68.20           | 37.24        | peak     | No Limit |
| 2   | X   | 5293.600     | 76.31                    | 15.60                   | 91.91                      | 68.20           | 23.71        | AVG      | No Limit |
| 3   |     | 5350.000     | 39.95                    | 15.72                   | 55.67                      | 74.00           | -18.33       | peak     |          |
| 4   |     | 5350.000     | 33.30                    | 15.72                   | 49.02                      | 54.00           | -4.98        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode 5290 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

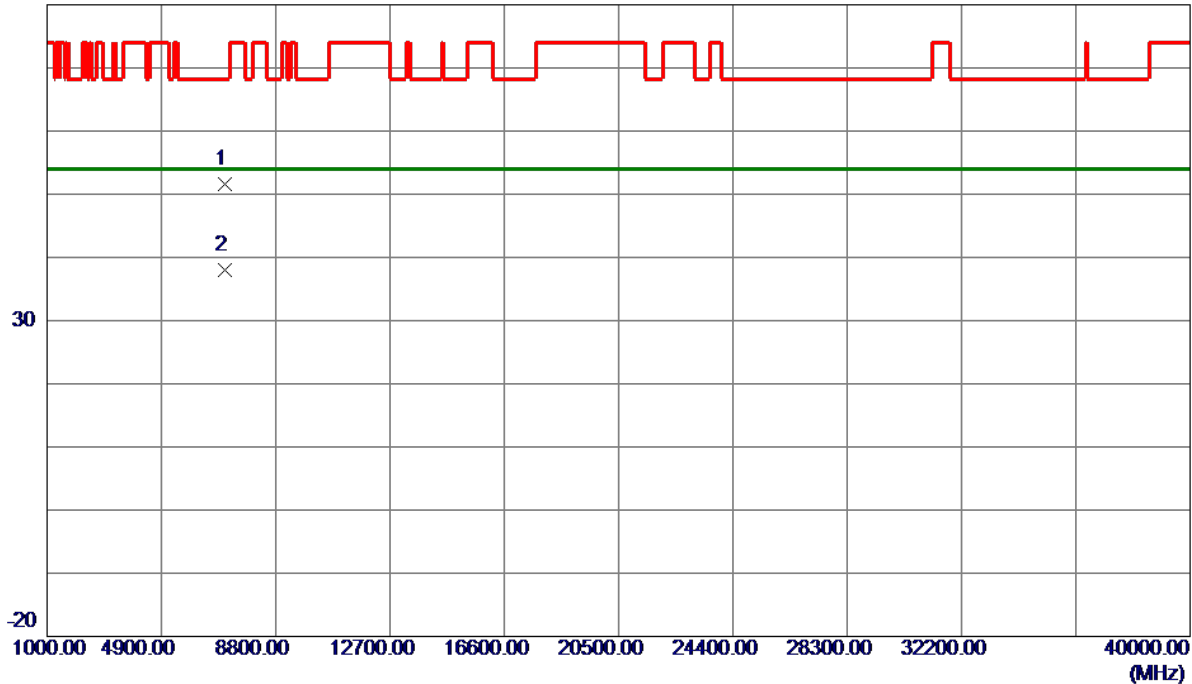


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7053.2920    | 41.67                      | 9.88                    | 51.55                     | 68.20           | -16.65       | Peak     |         |
| 2 * | 7053.4560    | 28.07                      | 9.88                    | 37.95                     | 54.00           | -16.05       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5260 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

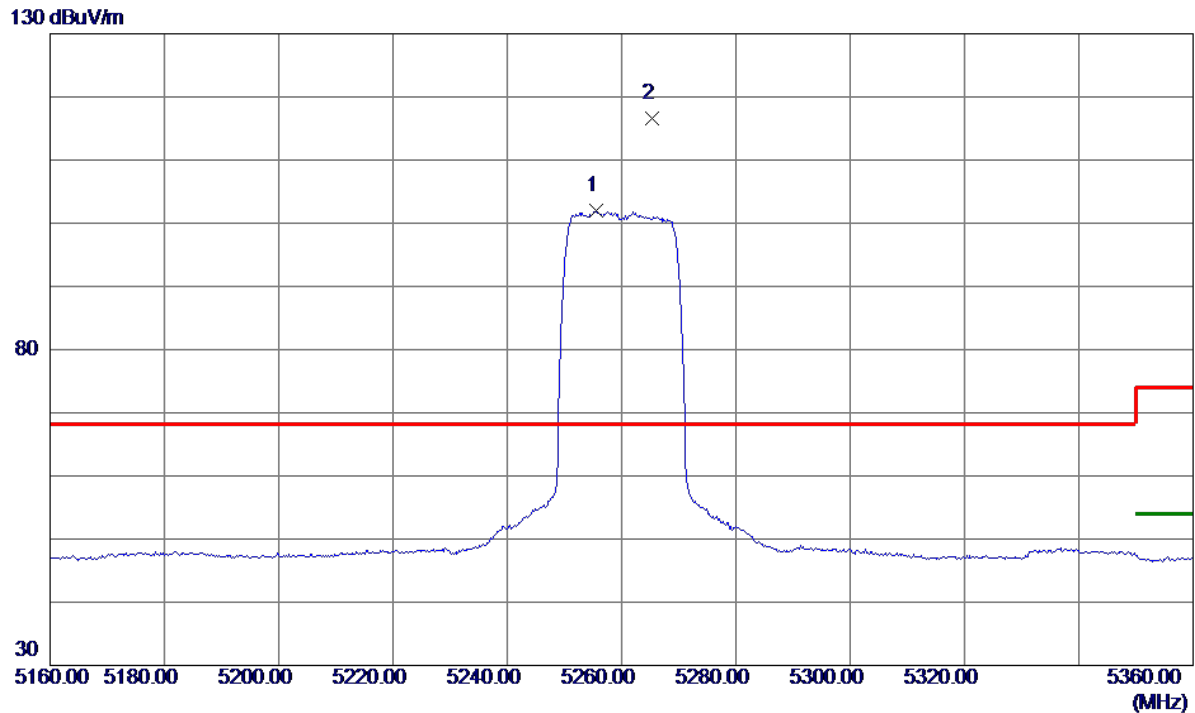


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5255.6000    | 86.45                      | 15.51                   | 101.96                    | 999.00          | -897.04      | AVG      | No Limit |
| 2 * | 5265.4000    | 101.05                     | 15.53                   | 116.58                    | 68.20           | 48.38        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5260 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

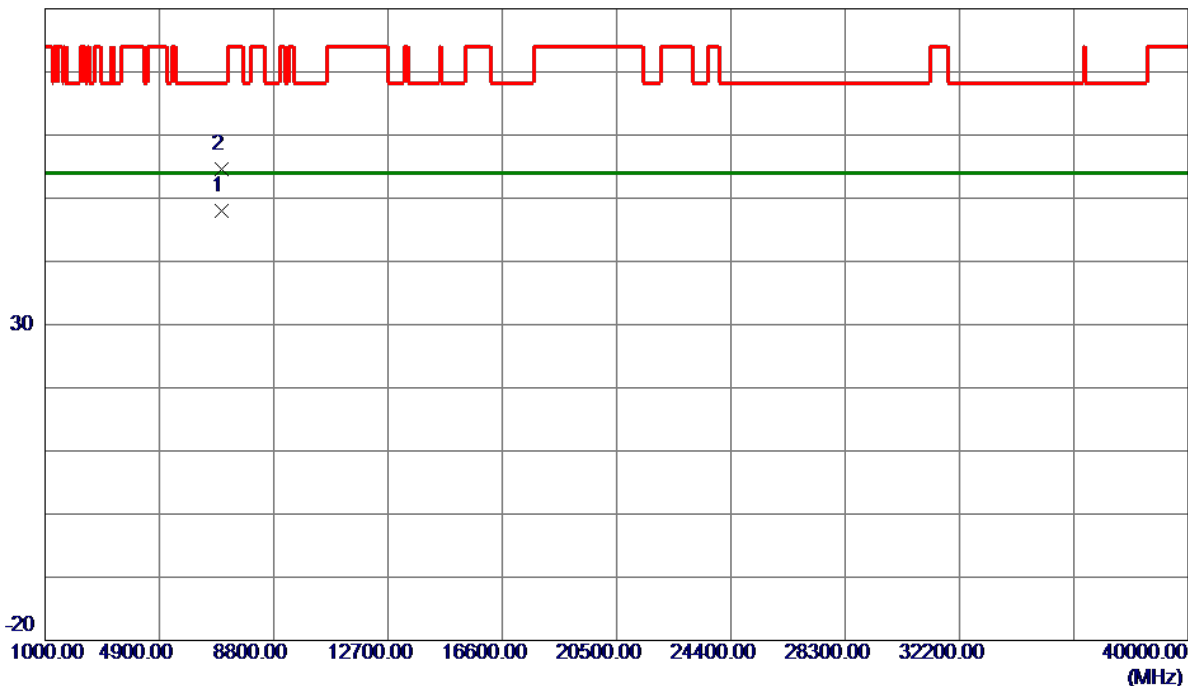


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7013.3550    | 38.14                      | 9.81                    | 47.95                     | 54.00           | -6.05        | AVG      |         |
| 2   | 7013.4050    | 44.88                      | 9.81                    | 54.69                     | 68.20           | -13.51       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

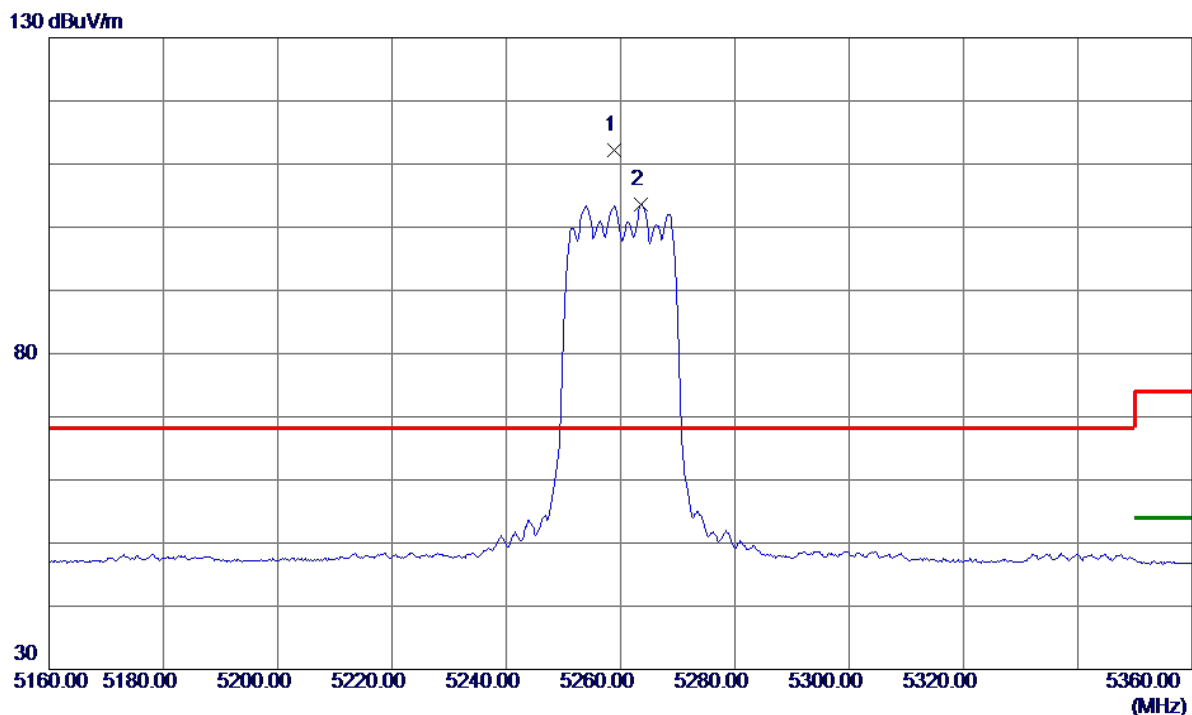


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5258.8000    | 96.61                      | 15.51                   | 112.12                    | 68.20           | 43.92        | Peak     | No Limit |
| 2   | 5263.6000    | 88.17                      | 15.52                   | 103.69                    | 999.00          | -895.31      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

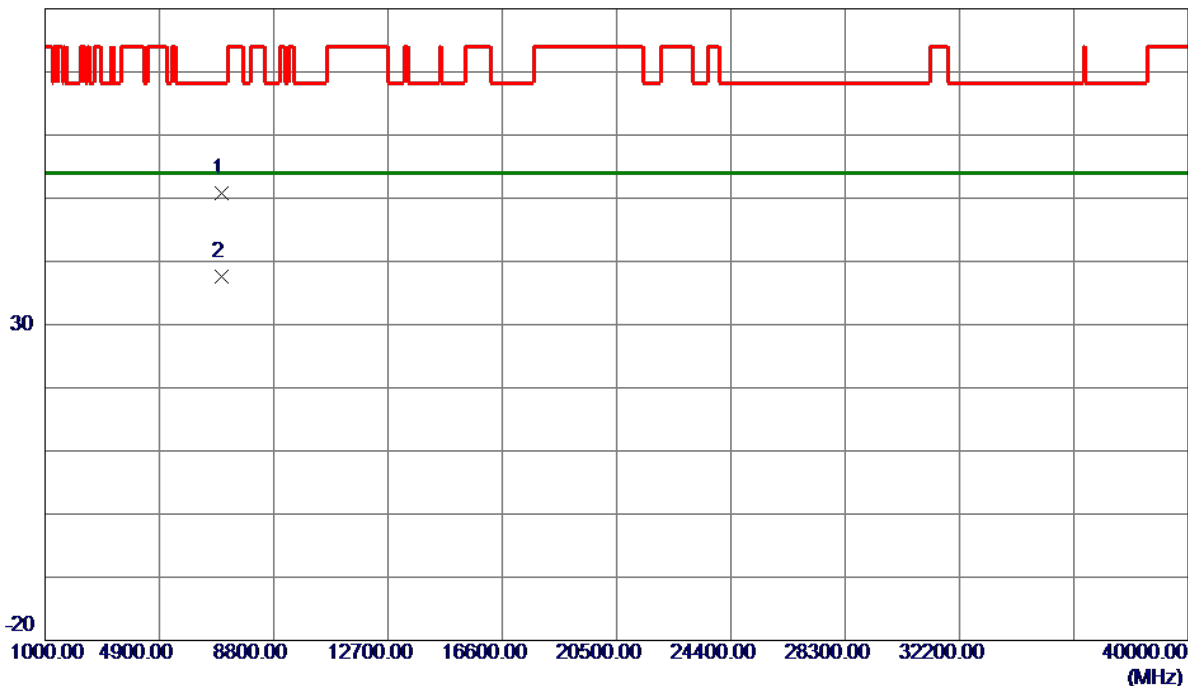


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7012.5180    | 40.98                      | 9.81                    | 50.79                     | 68.20           | -17.41       | Peak     |         |
| 2 * | 7013.4580    | 27.86                      | 9.81                    | 37.67                     | 54.00           | -16.33       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5300 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

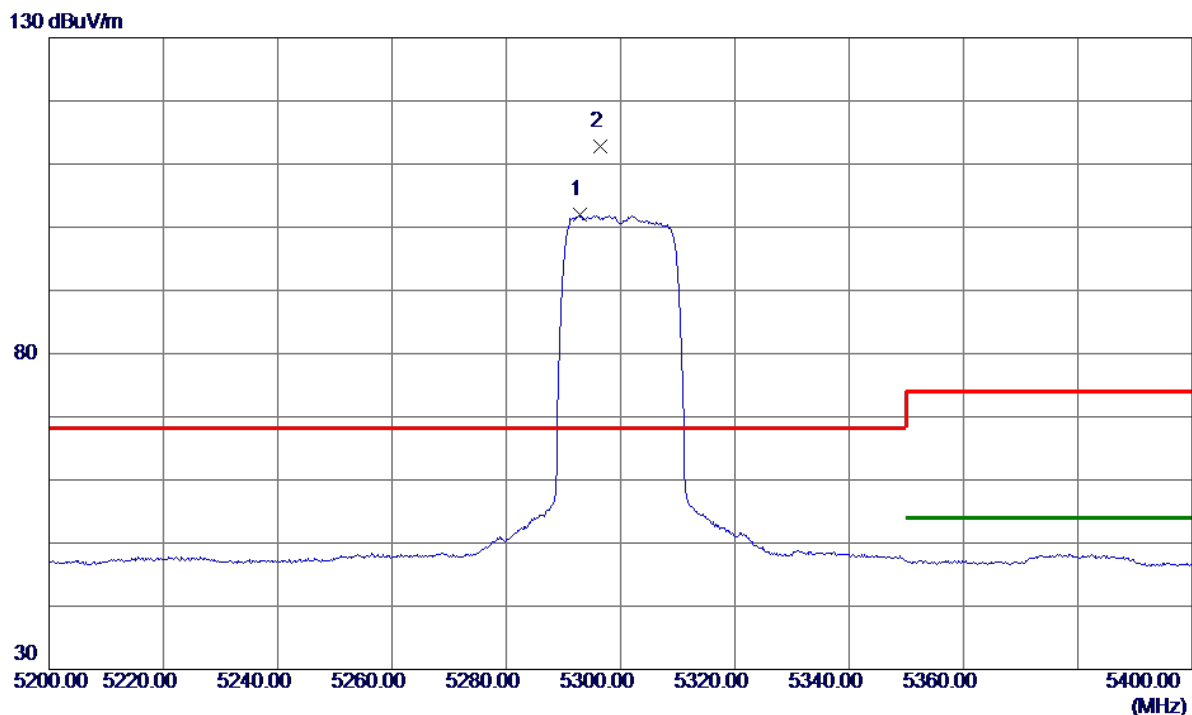


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5292.8000    | 86.35                      | 15.59                   | 101.94                    | 999.00          | -897.06      | AVG      | No Limit |
| 2 * | 5296.4000    | 97.26                      | 15.60                   | 112.86                    | 68.20           | 44.66        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5300 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

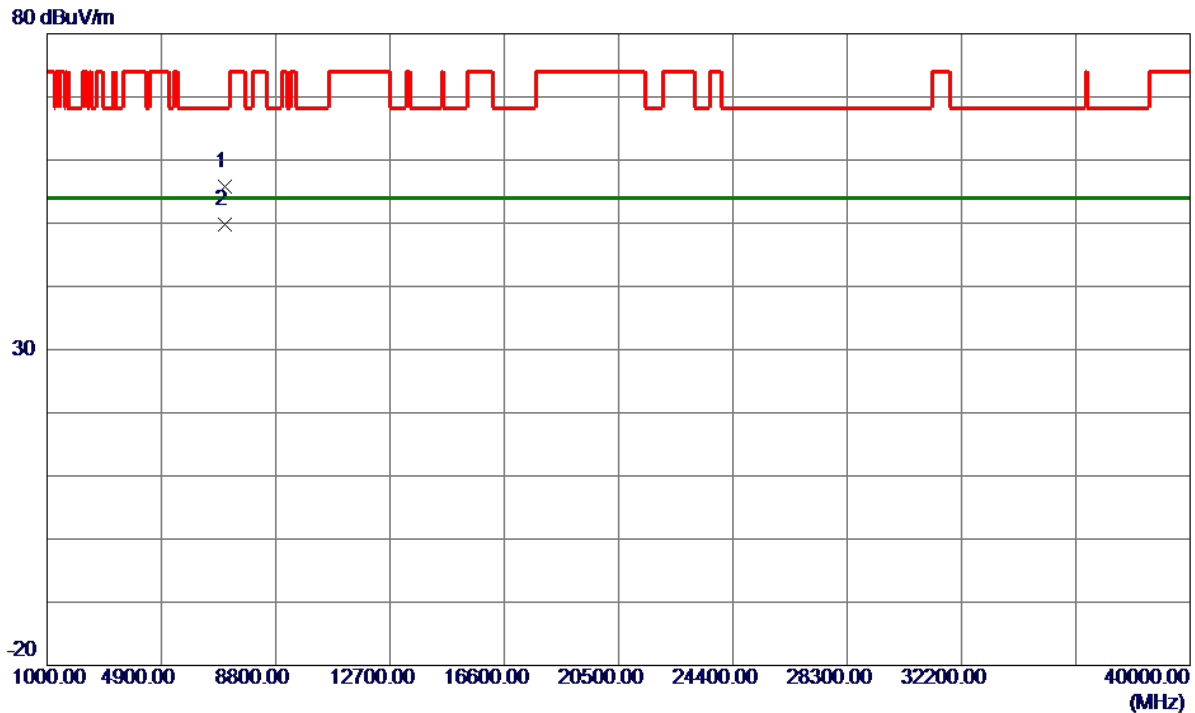


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7066.4400    | 45.94                      | 9.90                    | 55.84                     | 68.20           | -12.36       | Peak     |         |
| 2 * | 7066.6300    | 39.85                      | 9.90                    | 49.75                     | 54.00           | -4.25        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

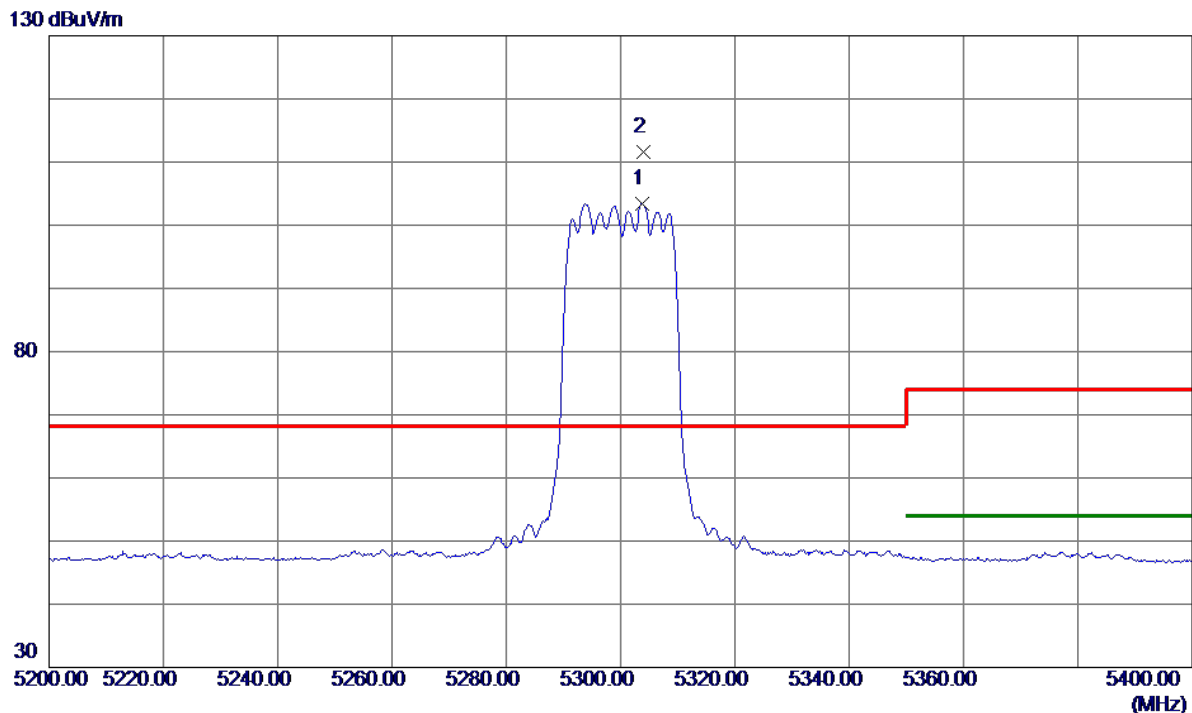


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5303.8000    | 87.83                      | 15.62                   | 103.45                    | 999.00          | -895.55      | AVG      | No Limit |
| 2 * | 5304.0000    | 95.89                      | 15.62                   | 111.51                    | 68.20           | 43.31        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

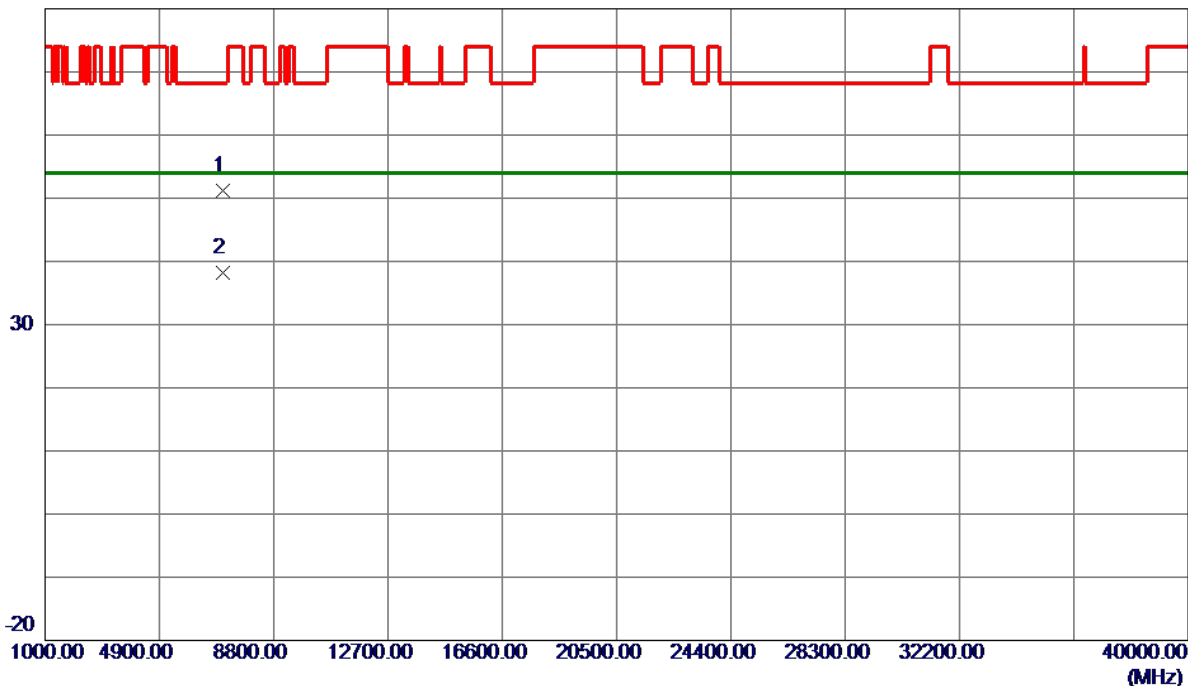


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7066.1960    | 41.29                      | 9.90                    | 51.19                     | 68.20           | -17.01       | Peak     |         |
| 2 * | 7067.2300    | 28.27                      | 9.90                    | 38.17                     | 54.00           | -15.83       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5320 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

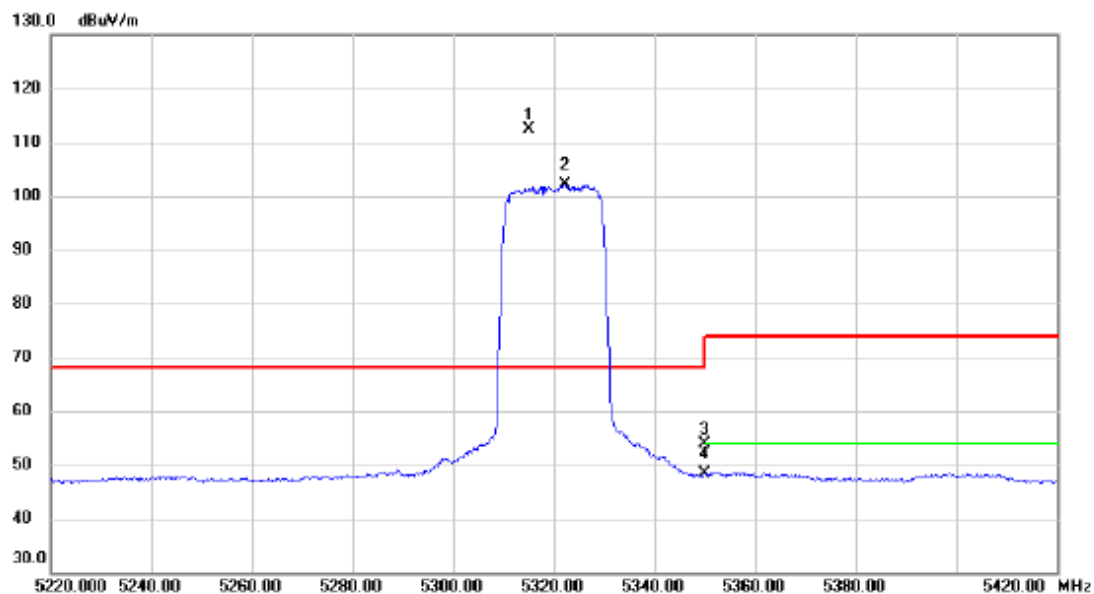

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5315.200     | 96.83                    | 15.64                   | 112.47                     | 68.20           | 44.27        | peak     | No Limit |
| 2   | X   | 5322.400     | 86.46                    | 15.65                   | 102.11                     | 68.20           | 33.91        | AVG      | No Limit |
| 3   |     | 5350.000     | 38.09                    | 15.72                   | 53.81                      | 74.00           | -20.19       | peak     |          |
| 4   |     | 5350.000     | 32.55                    | 15.72                   | 48.27                      | 54.00           | -5.73        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5320 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

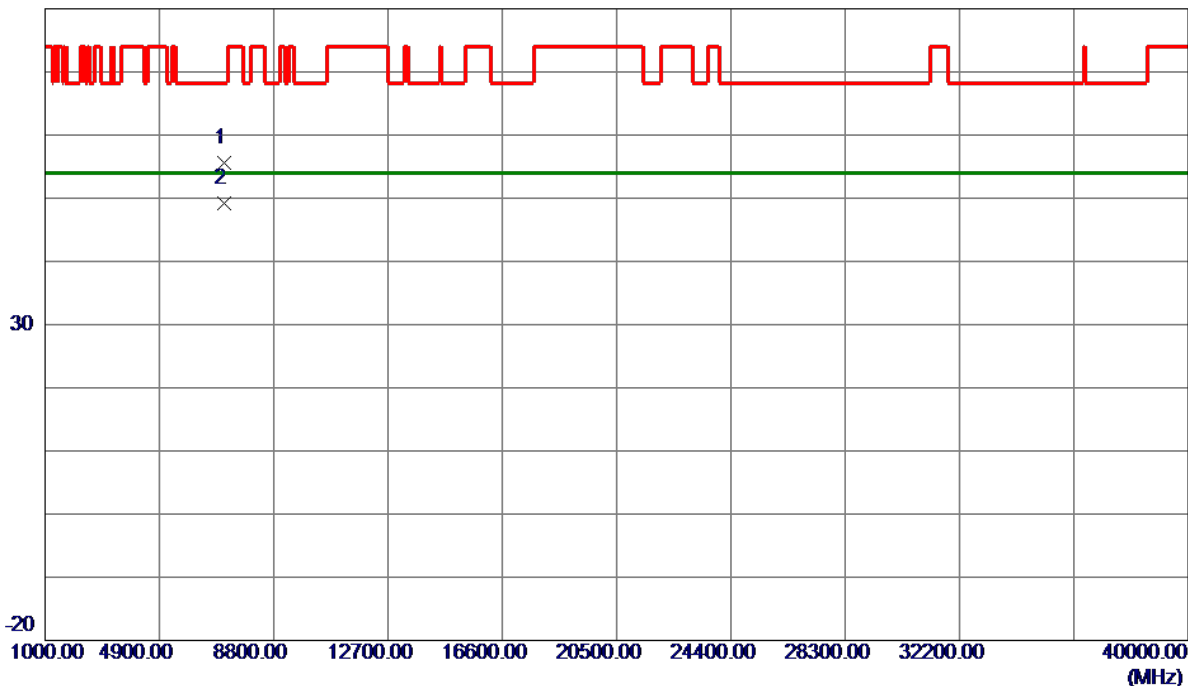


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7093.1950    | 45.64                      | 9.95                    | 55.59                     | 68.20           | -12.61       | Peak     |         |
| 2 * | 7093.2600    | 39.34                      | 9.95                    | 49.29                     | 54.00           | -4.71        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

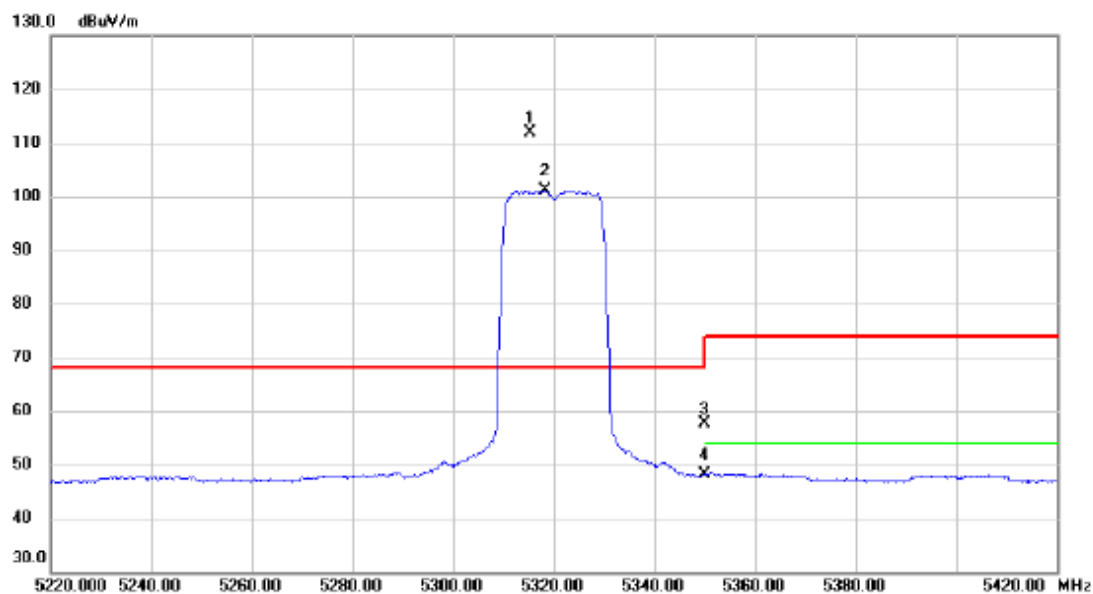


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5315.400     | 96.27                    | 15.64                   | 111.91                     | 68.20           | 43.71        | peak     | No Limit |
| 2   | X   | 5318.200     | 85.59                    | 15.64                   | 101.23                     | 68.20           | 33.03        | AVG      | No Limit |
| 3   |     | 5350.000     | 41.80                    | 15.72                   | 57.52                      | 74.00           | -16.48       | peak     |          |
| 4   |     | 5350.000     | 32.33                    | 15.72                   | 48.05                      | 54.00           | -5.95        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

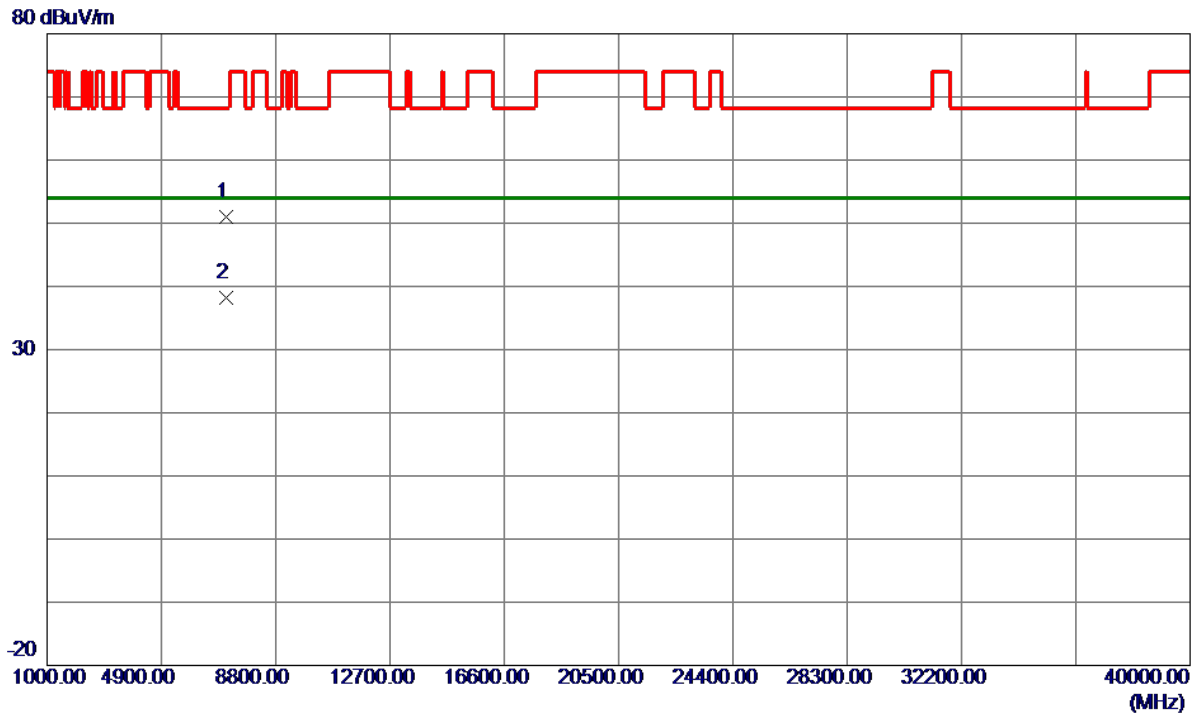


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7092.0960    | 41.12                      | 9.95                    | 51.07                     | 68.20           | -17.13       | Peak     |         |
| 2 * | 7092.5380    | 28.27                      | 9.95                    | 38.22                     | 54.00           | -15.78       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5270 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

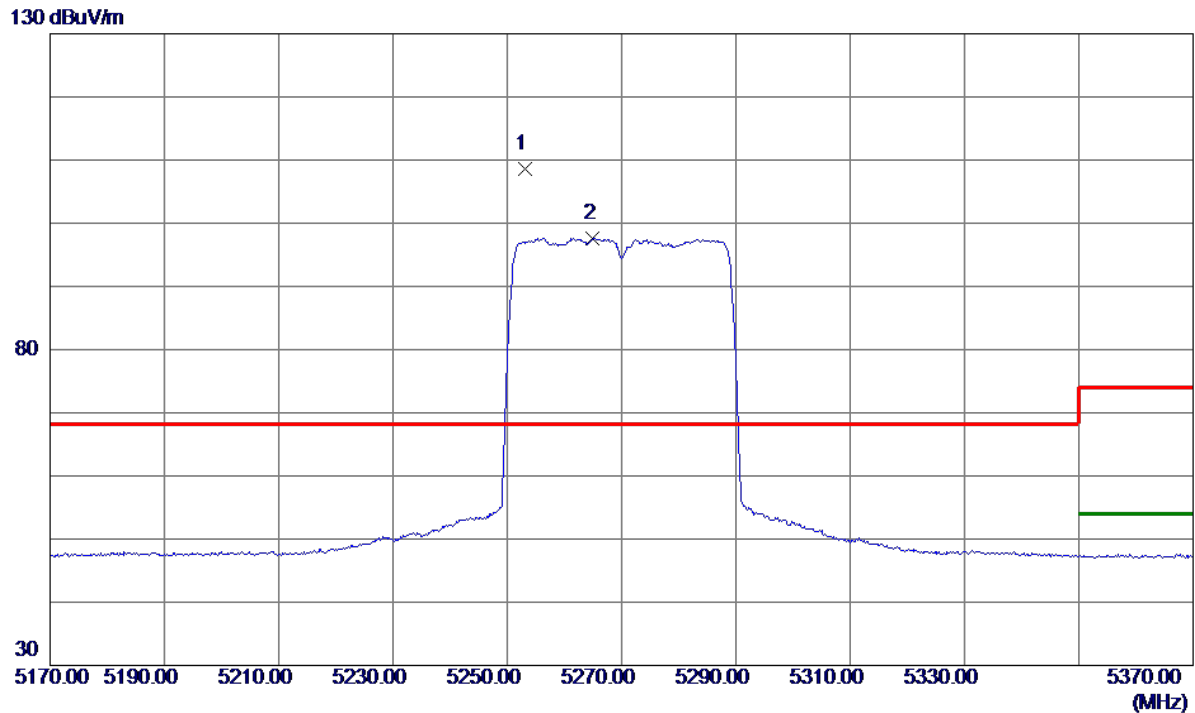


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5253.2000    | 93.12                      | 15.50                   | 108.62                    | 68.20           | 40.42        | Peak     | No Limit |
| 2   | 5265.0000    | 82.14                      | 15.53                   | 97.67                     | 999.00          | -901.33      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5270 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

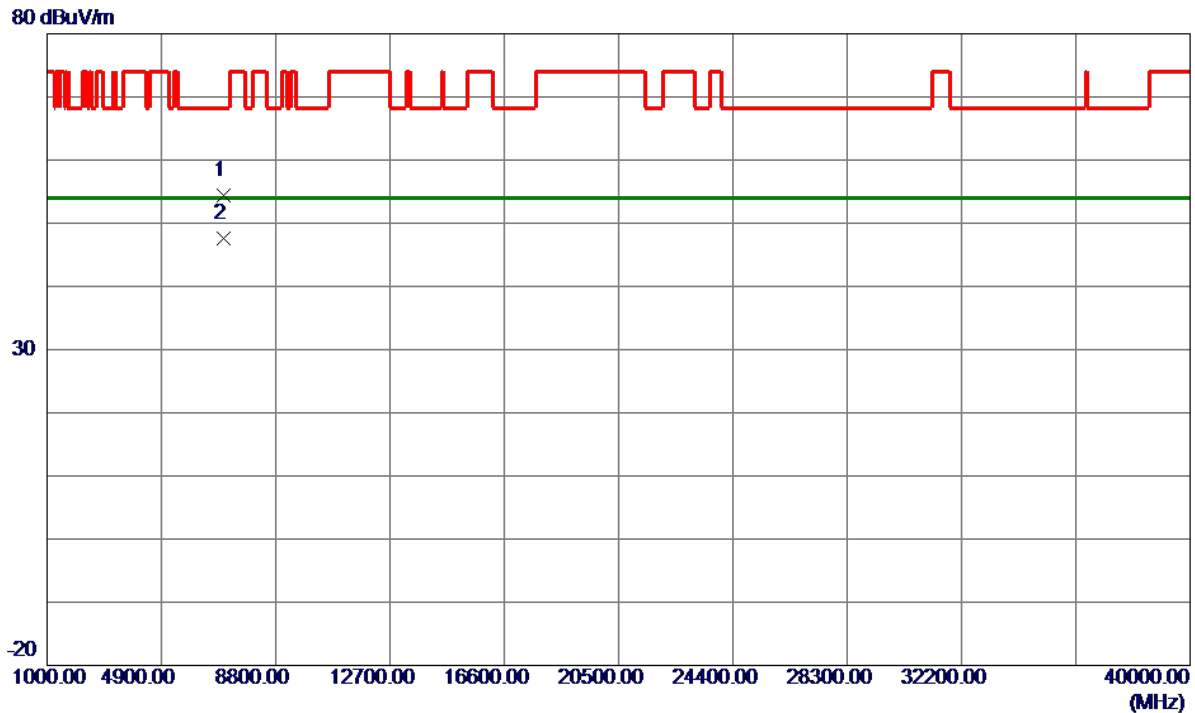


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7026.2350    | 44.55                      | 9.83                    | 54.38                     | 68.20           | -13.82       | Peak     |         |
| 2 * | 7026.5950    | 37.80                      | 9.84                    | 47.64                     | 54.00           | -6.36        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

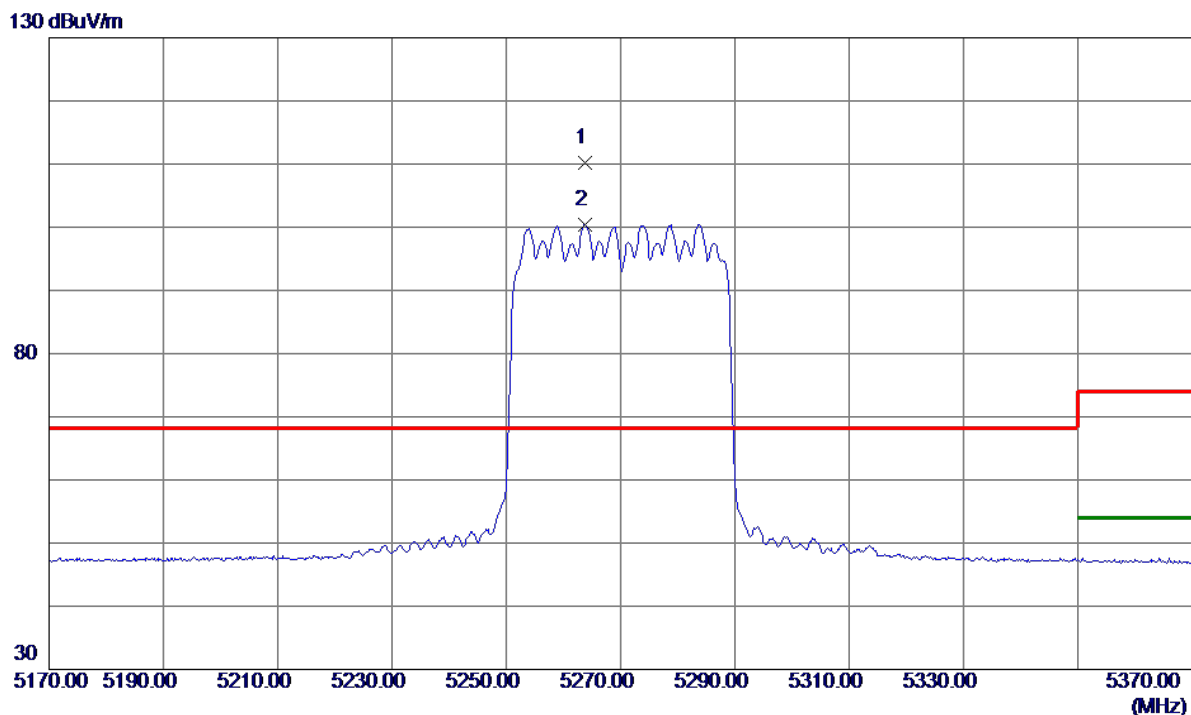


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5263.8000    | 94.70                      | 15.52                   | 110.22                    | 68.20           | 42.02        | Peak     | No Limit |
| 2   | 5263.8000    | 84.94                      | 15.52                   | 100.46                    | 999.00          | -898.54      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

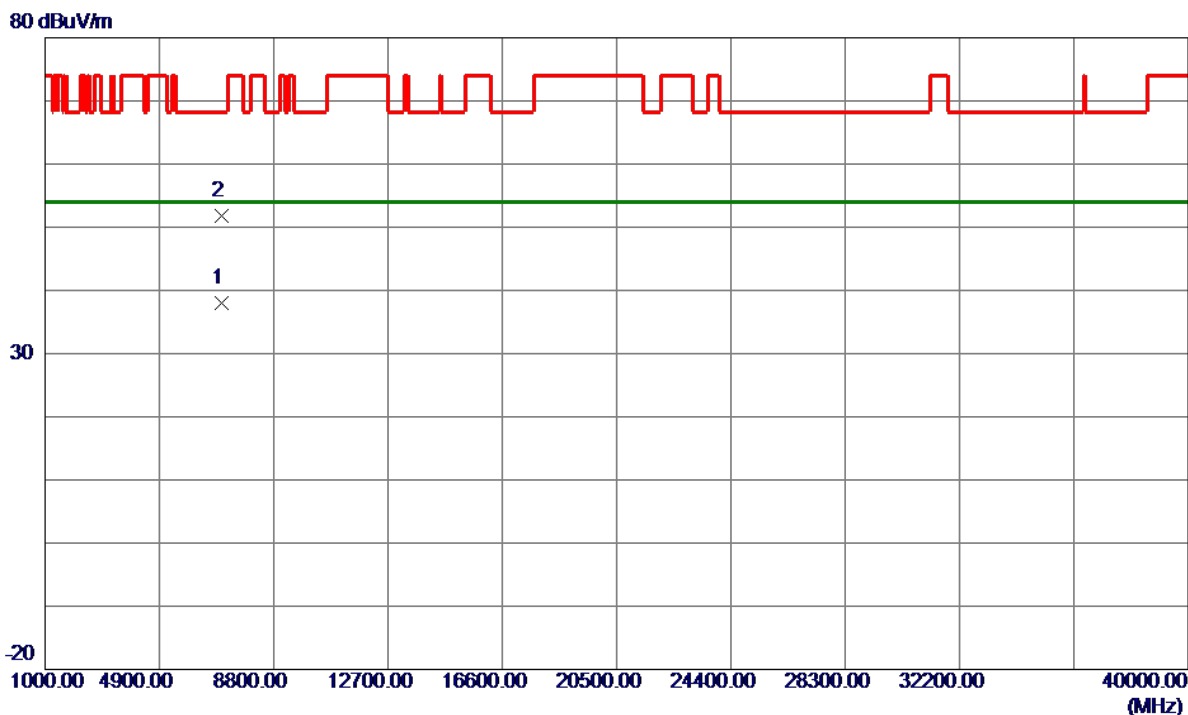


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7027.0360    | 28.14                      | 9.84                    | 37.98                     | 54.00           | -16.02       | AVG      |         |
| 2   | 7027.5140    | 41.99                      | 9.84                    | 51.83                     | 68.20           | -16.37       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

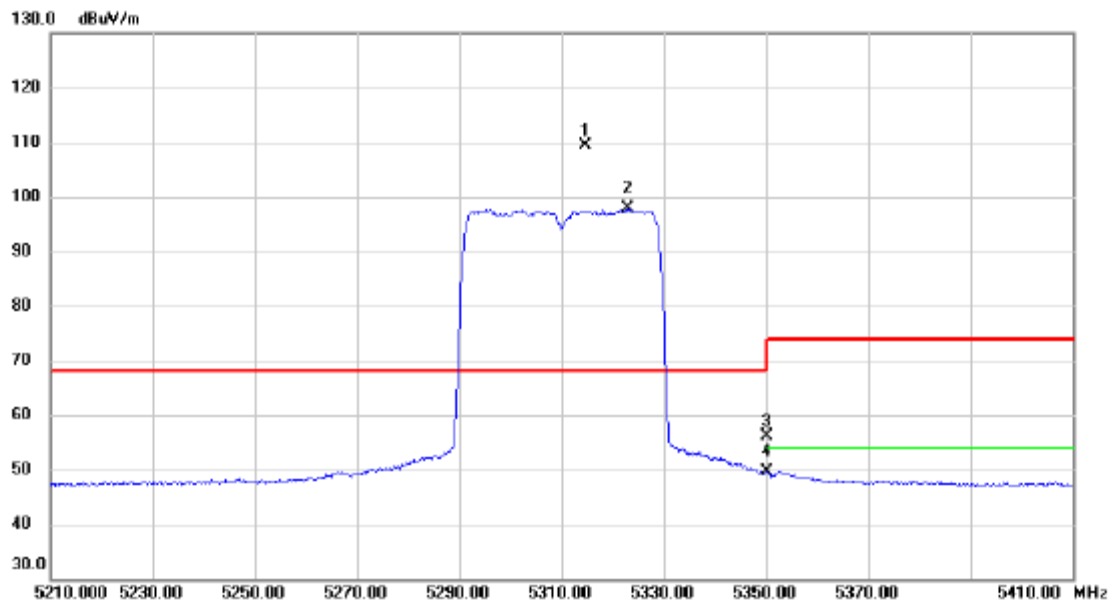


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5314.600     | 93.69                    | 15.64                   | 109.33                     | 68.20           | 41.13        | peak     | No Limit |
| 2   | X   | 5322.800     | 82.11                    | 15.65                   | 97.76                      | 68.20           | 29.56        | AVG      | No Limit |
| 3   |     | 5350.000     | 40.43                    | 15.72                   | 56.15                      | 74.00           | -17.85       | peak     |          |
| 4   |     | 5350.000     | 33.87                    | 15.72                   | 49.59                      | 54.00           | -4.41        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

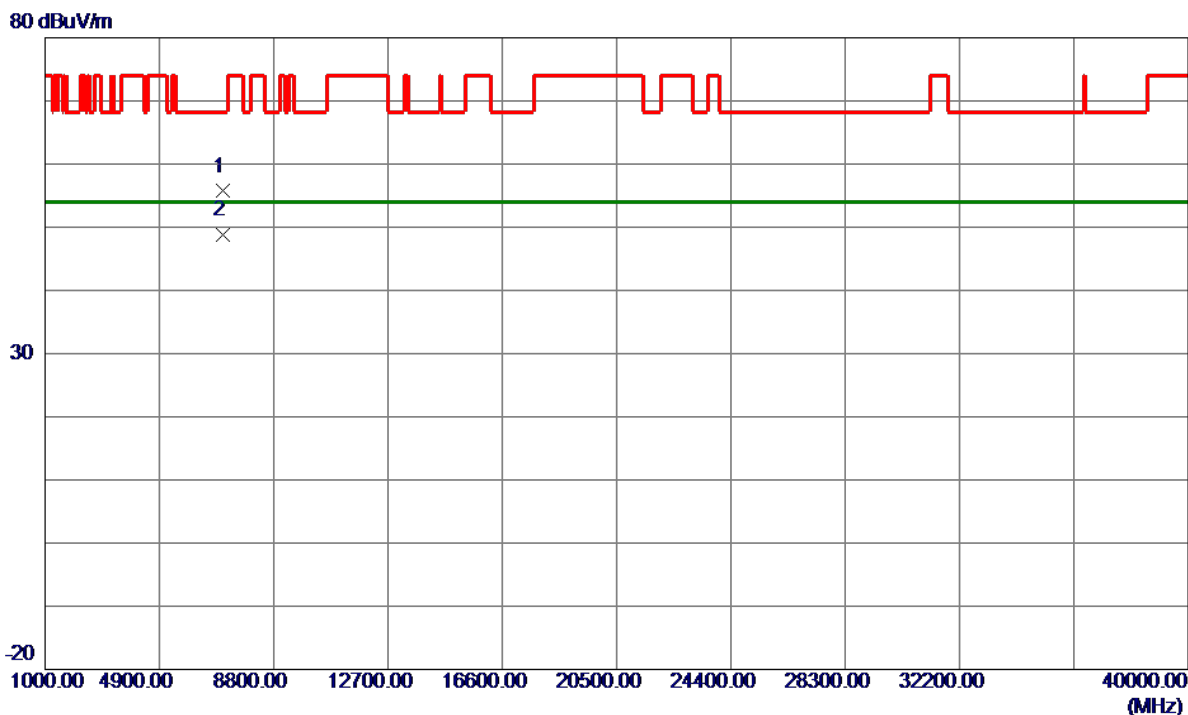


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7079.9000    | 45.77                      | 9.93                    | 55.70                     | 68.20           | -12.50       | Peak     |         |
| 2 * | 7079.9650    | 38.92                      | 9.93                    | 48.85                     | 54.00           | -5.15        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

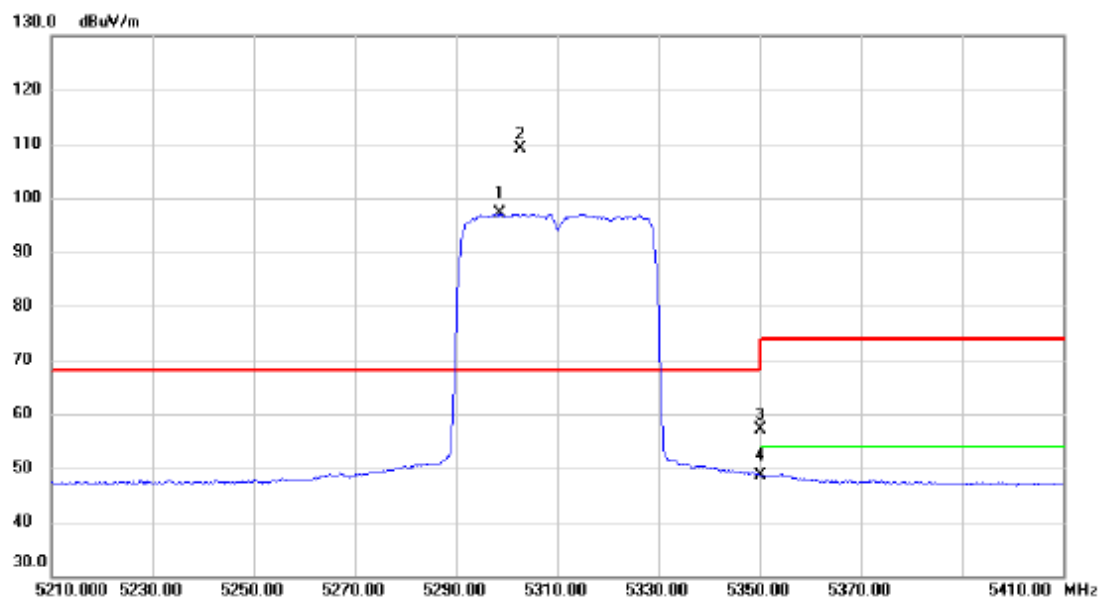


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5298.600     | 81.44                    | 15.61                   | 97.05                      | 68.20           | 28.85        | AVG      | No Limit |
| 2   | *   | 5302.600     | 93.50                    | 15.60                   | 109.10                     | 68.20           | 40.90        | peak     | No Limit |
| 3   |     | 5350.000     | 41.44                    | 15.72                   | 57.16                      | 74.00           | -16.84       | peak     |          |
| 4   |     | 5350.000     | 32.84                    | 15.72                   | 48.56                      | 54.00           | -5.44        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

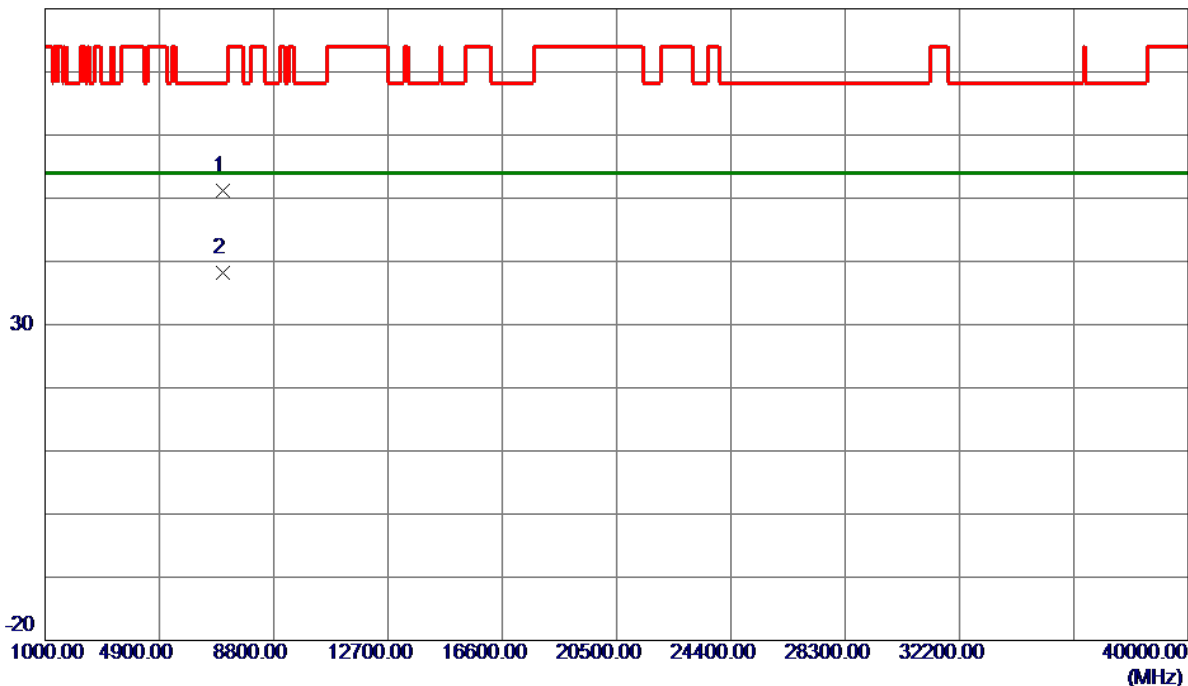


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7080.2880    | 41.20                      | 9.93                    | 51.13                     | 68.20           | -17.07       | Peak     |         |
| 2 * | 7080.3980    | 28.18                      | 9.93                    | 38.11                     | 54.00           | -15.89       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

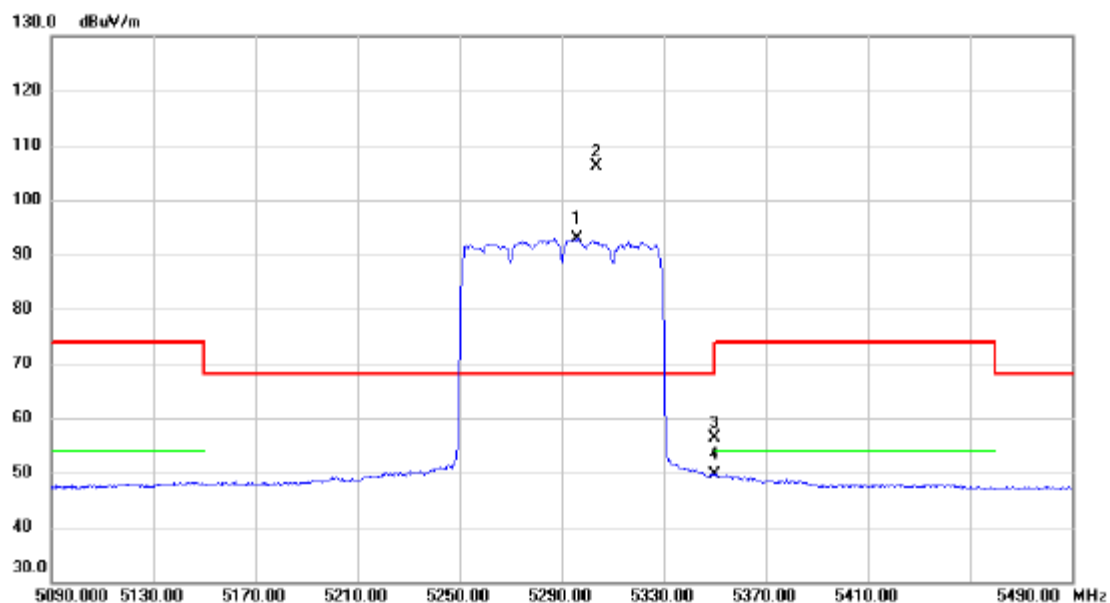


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1 X     | 5296.400     | 77.27                    | 15.60                   | 92.87                      | 68.20           | 24.67        | AVG      | No Limit |
| 2 *     | 5303.600     | 90.55                    | 15.61                   | 106.16                     | 68.20           | 37.96        | peak     | No Limit |
| 3       | 5350.000     | 40.57                    | 15.72                   | 56.29                      | 74.00           | -17.71       | peak     |          |
| 4       | 5350.000     | 34.01                    | 15.72                   | 49.73                      | 54.00           | -4.27        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

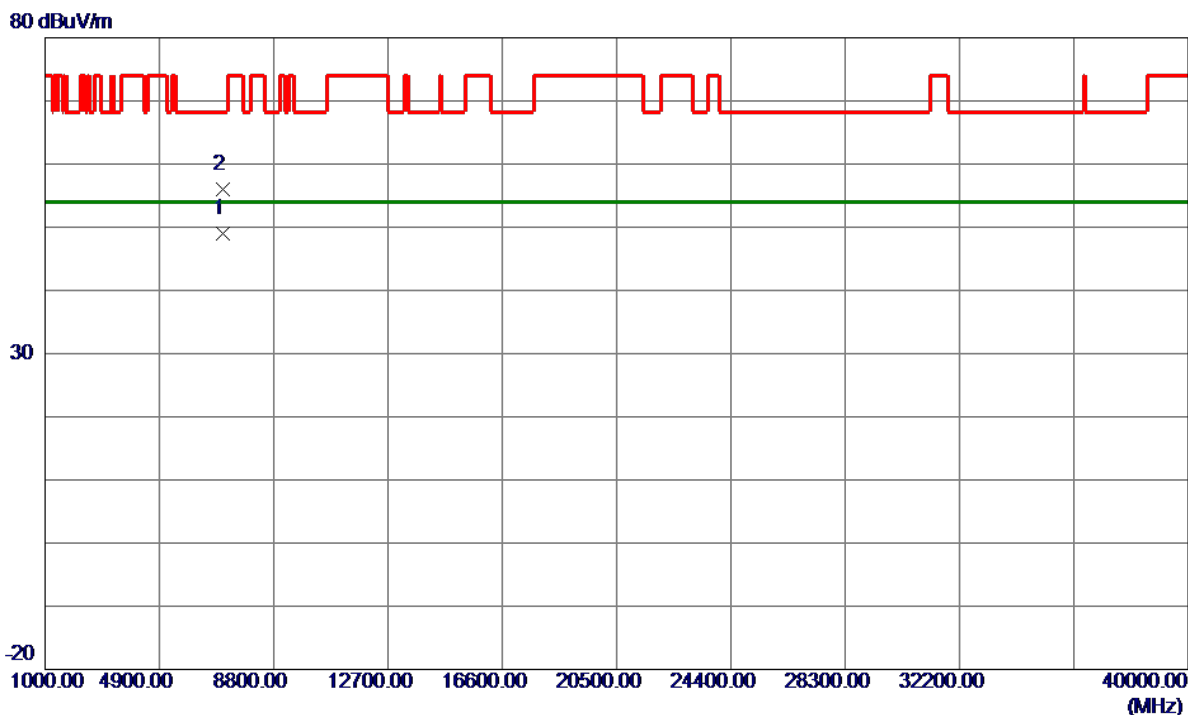


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7053.2600    | 39.13                      | 9.88                    | 49.01                     | 54.00           | -4.99        | AVG      |         |
| 2   | 7053.3600    | 46.06                      | 9.88                    | 55.94                     | 68.20           | -12.26       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

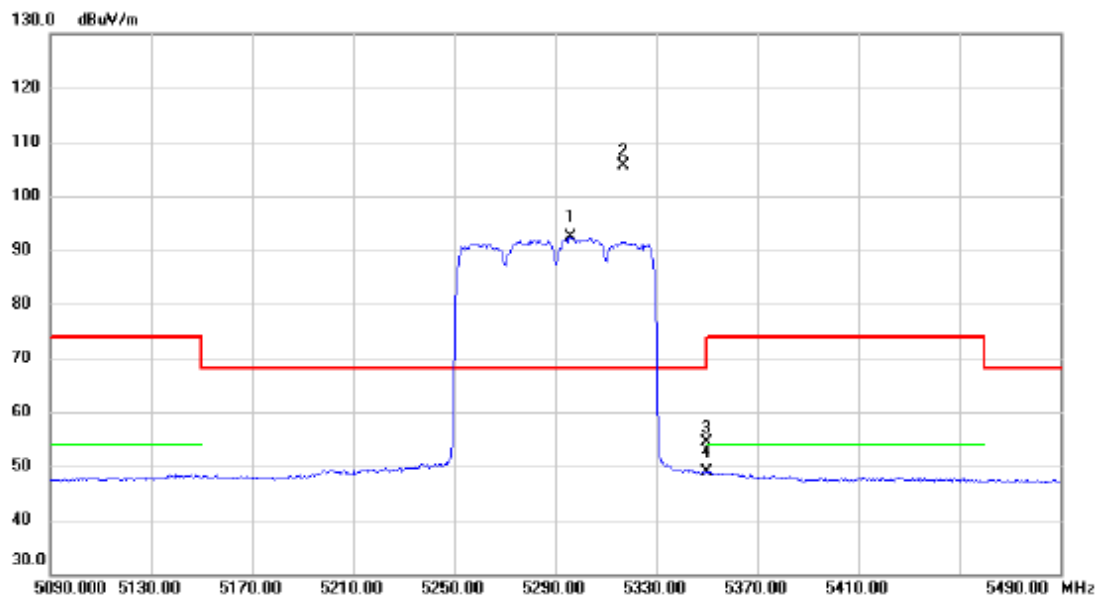


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 5296.400     | 76.86                    | 15.60                   | 92.46                      | 68.20           | 24.26        | AVG      | No Limit |
| 2   | *   | 5317.200     | 89.95                    | 15.64                   | 105.59                     | 68.20           | 37.39        | peak     | No Limit |
| 3   |     | 5350.000     | 38.72                    | 15.72                   | 54.44                      | 74.00           | -19.56       | peak     |          |
| 4   |     | 5350.000     | 33.11                    | 15.72                   | 48.83                      | 54.00           | -5.17        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

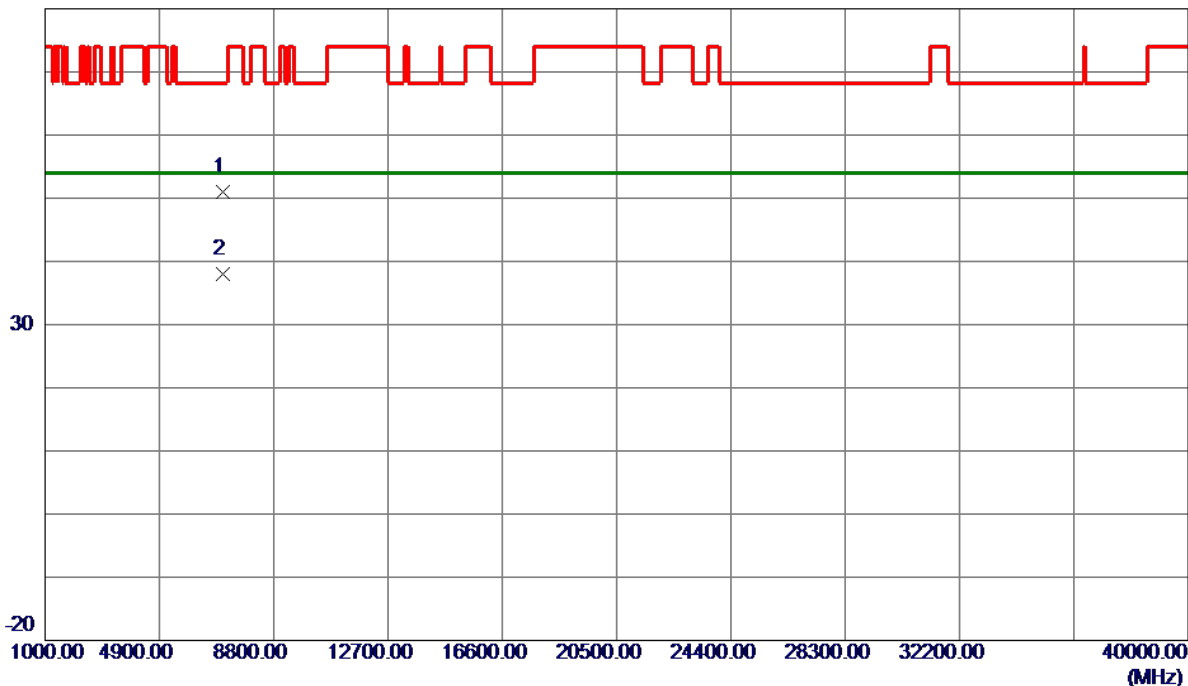


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 7053.9620 | 41.08         | 9.88           | 50.96       | 68.20  | -17.24 | Peak     |         |
| 2 * | 7053.9680 | 28.03         | 9.88           | 37.91       | 54.00  | -16.09 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                            |              |          |
|-----------|--------------------------------------------|--------------|----------|
| Test Mode | UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz | Polarization | Vertical |
|-----------|--------------------------------------------|--------------|----------|

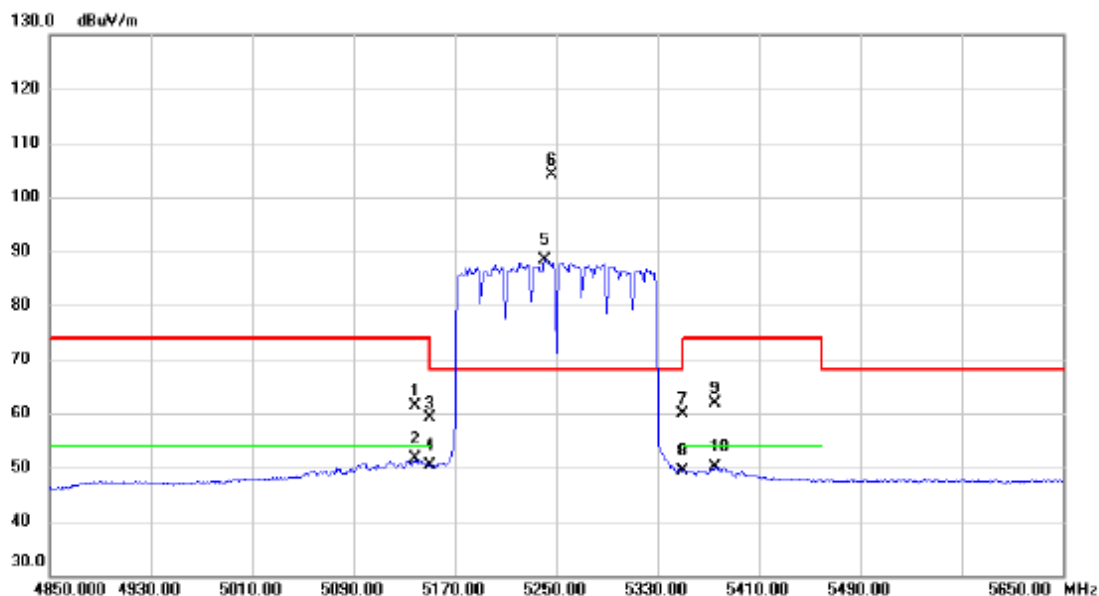


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5138.800     | 46.17                    | 15.23                   | 61.40                      | 74.00           | -12.60       | peak     |          |
| 2   |     | 5138.800     | 36.31                    | 15.23                   | 51.54                      | 54.00           | -2.46        | AVG      |          |
| 3   |     | 5150.000     | 43.99                    | 15.26                   | 59.25                      | 74.00           | -14.75       | peak     |          |
| 4   |     | 5150.000     | 35.01                    | 15.26                   | 50.27                      | 54.00           | -3.73        | AVG      |          |
| 5   | X   | 5241.200     | 73.00                    | 15.47                   | 88.47                      | 68.20           | 20.27        | AVG      | No Limit |
| 6   | *   | 5246.000     | 88.77                    | 15.48                   | 104.25                     | 68.20           | 36.05        | peak     | No Limit |
| 7   |     | 5350.000     | 44.27                    | 15.72                   | 59.99                      | 74.00           | -14.01       | peak     |          |
| 8   |     | 5350.000     | 33.62                    | 15.72                   | 49.34                      | 54.00           | -4.66        | AVG      |          |
| 9   |     | 5374.800     | 46.04                    | 15.77                   | 61.81                      | 74.00           | -12.19       | peak     |          |
| 10  |     | 5374.800     | 34.24                    | 15.77                   | 50.01                      | 54.00           | -3.99        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                            |              |          |
|-----------|--------------------------------------------|--------------|----------|
| Test Mode | UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz | Polarization | Vertical |
|-----------|--------------------------------------------|--------------|----------|

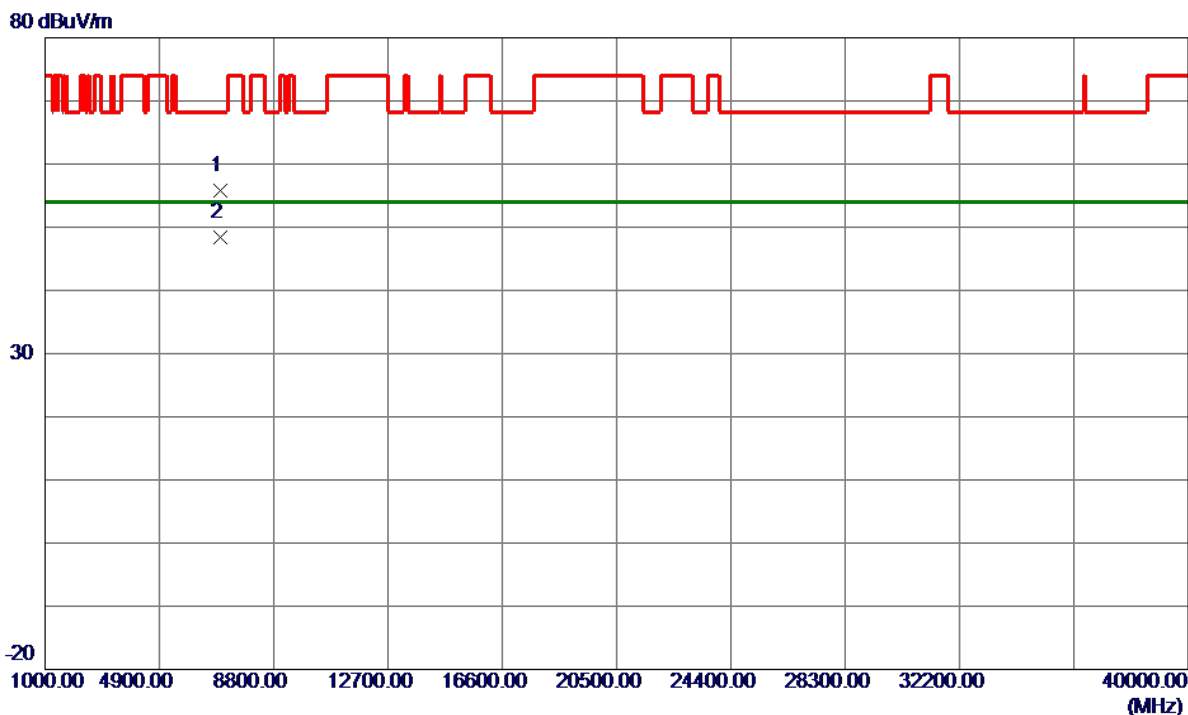


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 6999.8550    | 45.93                      | 9.79                    | 55.72                     | 68.20           | -12.48       | Peak     |         |
| 2 * | 6999.8550    | 38.55                      | 9.79                    | 48.34                     | 54.00           | -5.66        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                            |              |            |
|-----------|--------------------------------------------|--------------|------------|
| Test Mode | UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz | Polarization | Horizontal |
|-----------|--------------------------------------------|--------------|------------|

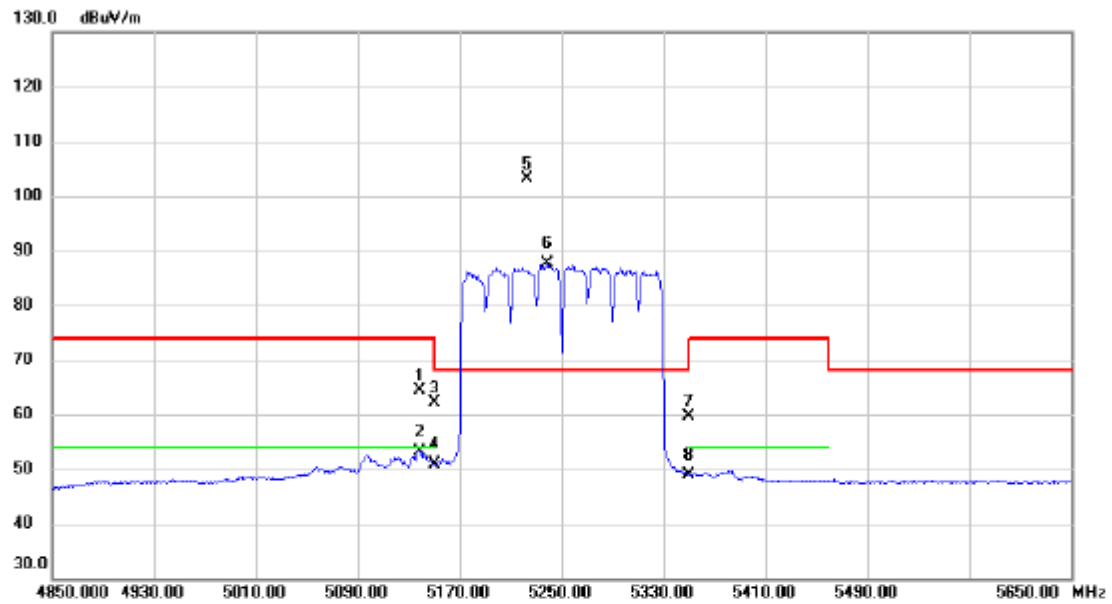


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5138.000     | 49.23                    | 15.23                   | 64.46                      | 74.00           | -9.54        | peak     |          |
| 2   |     | 5138.000     | 37.80                    | 15.23                   | 53.03                      | 54.00           | -0.97        | AVG      |          |
| 3   |     | 5150.000     | 46.84                    | 15.26                   | 62.10                      | 74.00           | -11.90       | peak     |          |
| 4   |     | 5150.000     | 35.53                    | 15.26                   | 50.79                      | 54.00           | -3.21        | AVG      |          |
| 5   | *   | 5222.800     | 87.60                    | 15.43                   | 103.03                     | 68.20           | 34.83        | peak     | No Limit |
| 6   | X   | 5238.800     | 72.16                    | 15.47                   | 87.63                      | 68.20           | 19.43        | AVG      | No Limit |
| 7   |     | 5350.000     | 43.81                    | 15.72                   | 59.53                      | 74.00           | -14.47       | peak     |          |
| 8   |     | 5350.000     | 33.28                    | 15.72                   | 49.00                      | 54.00           | -5.00        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                            |              |            |
|-----------|--------------------------------------------|--------------|------------|
| Test Mode | UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz | Polarization | Horizontal |
|-----------|--------------------------------------------|--------------|------------|

80 dBuV/m

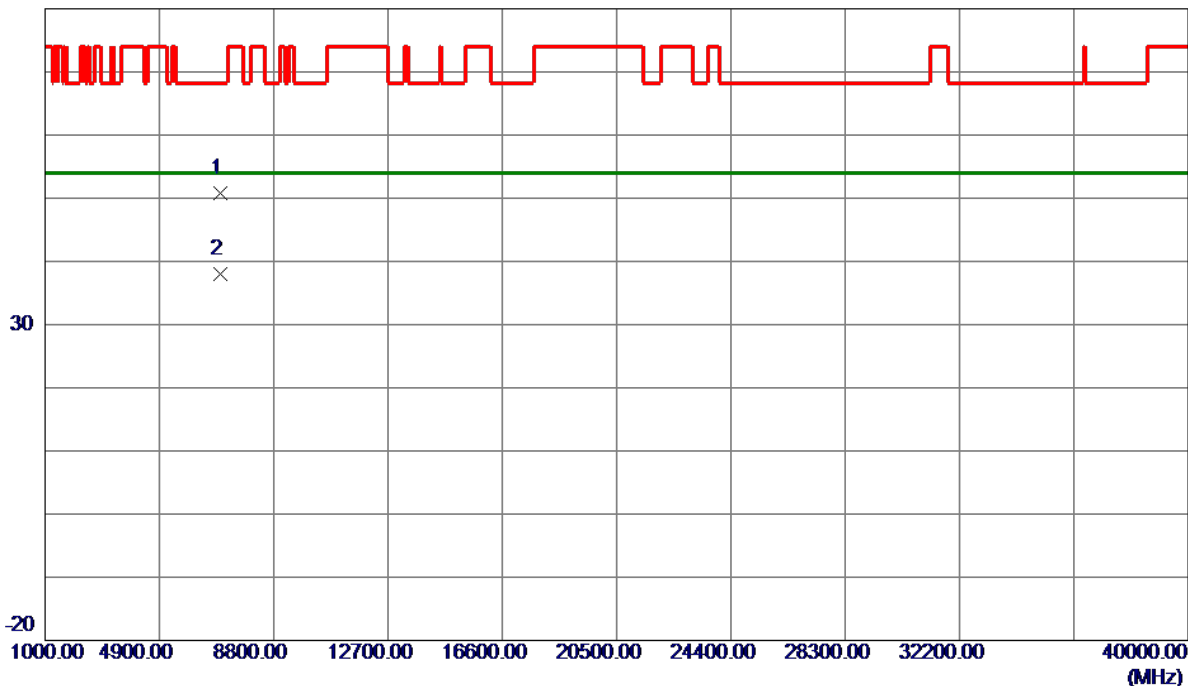


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 6999.6760    | 40.94                      | 9.79                    | 50.73                     | 68.20           | -17.47       | Peak     |         |
| 2 * | 7000.9200    | 28.30                      | 9.79                    | 38.09                     | 54.00           | -15.91       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                           |              |          |
|-----------|-------------------------------------------|--------------|----------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz | Polarization | Vertical |
|-----------|-------------------------------------------|--------------|----------|

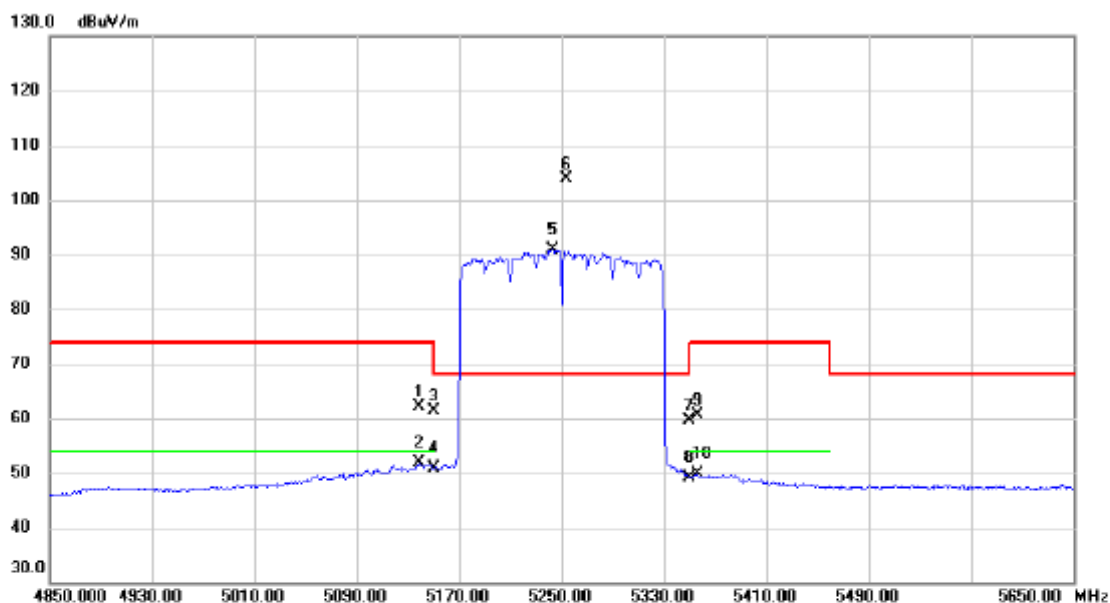


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1       | 5138.000     | 46.88                    | 15.23                   | 62.11                      | 74.00           | -11.89       | peak     |          |
| 2       | 5138.000     | 36.69                    | 15.23                   | 51.92                      | 54.00           | -2.08        | AVG      |          |
| 3       | 5150.000     | 46.02                    | 15.26                   | 61.28                      | 74.00           | -12.72       | peak     |          |
| 4       | 5150.000     | 35.63                    | 15.26                   | 50.89                      | 54.00           | -3.11        | AVG      |          |
| 5 X     | 5242.800     | 75.30                    | 15.48                   | 90.78                      | 68.20           | 22.58        | AVG      | No Limit |
| 6 *     | 5254.000     | 88.49                    | 15.51                   | 104.00                     | 68.20           | 35.80        | peak     | No Limit |
| 7       | 5350.000     | 43.88                    | 15.72                   | 59.60                      | 74.00           | -14.40       | peak     |          |
| 8       | 5350.000     | 33.53                    | 15.72                   | 49.25                      | 54.00           | -4.75        | AVG      |          |
| 9       | 5355.600     | 44.81                    | 15.73                   | 60.54                      | 74.00           | -13.46       | peak     |          |
| 10      | 5355.600     | 34.12                    | 15.73                   | 49.85                      | 54.00           | -4.15        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                           |              |          |
|-----------|-------------------------------------------|--------------|----------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz | Polarization | Vertical |
|-----------|-------------------------------------------|--------------|----------|

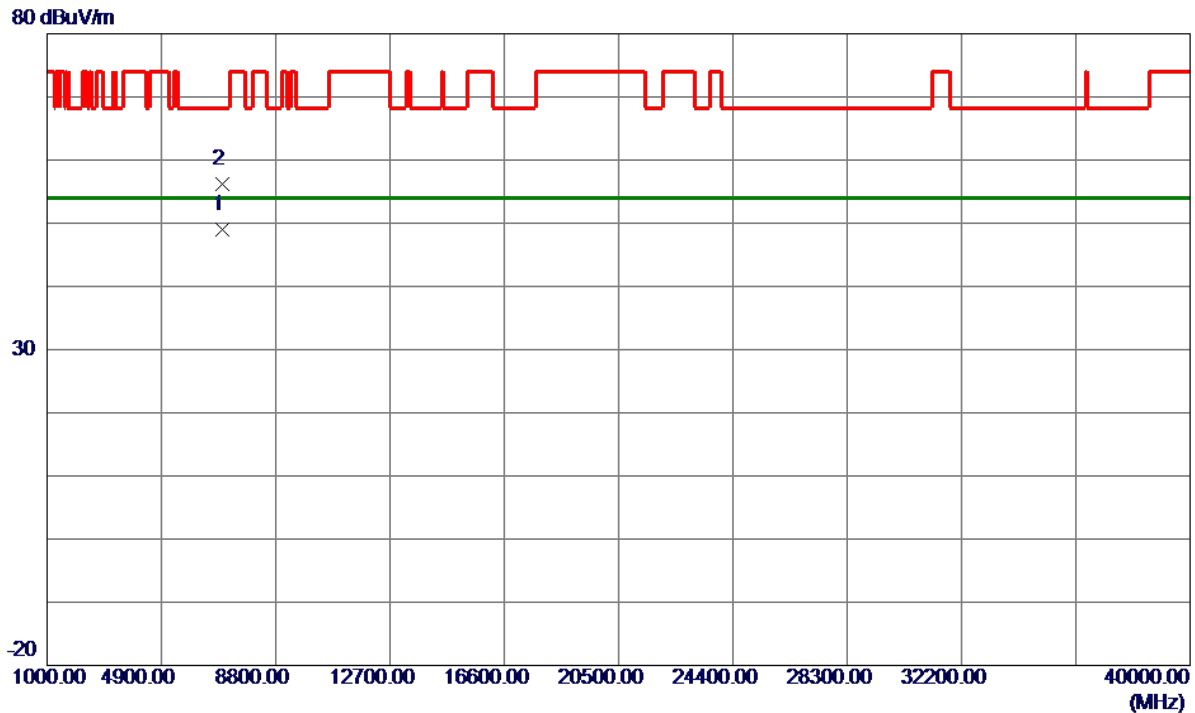


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 7000.0050 | 39.28         | 9.79           | 49.07       | 54.00  | -4.93  | AVG      |         |
| 2   | 7000.2650 | 46.33         | 9.79           | 56.12       | 68.20  | -12.08 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                           |              |            |
|-----------|-------------------------------------------|--------------|------------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz | Polarization | Horizontal |
|-----------|-------------------------------------------|--------------|------------|

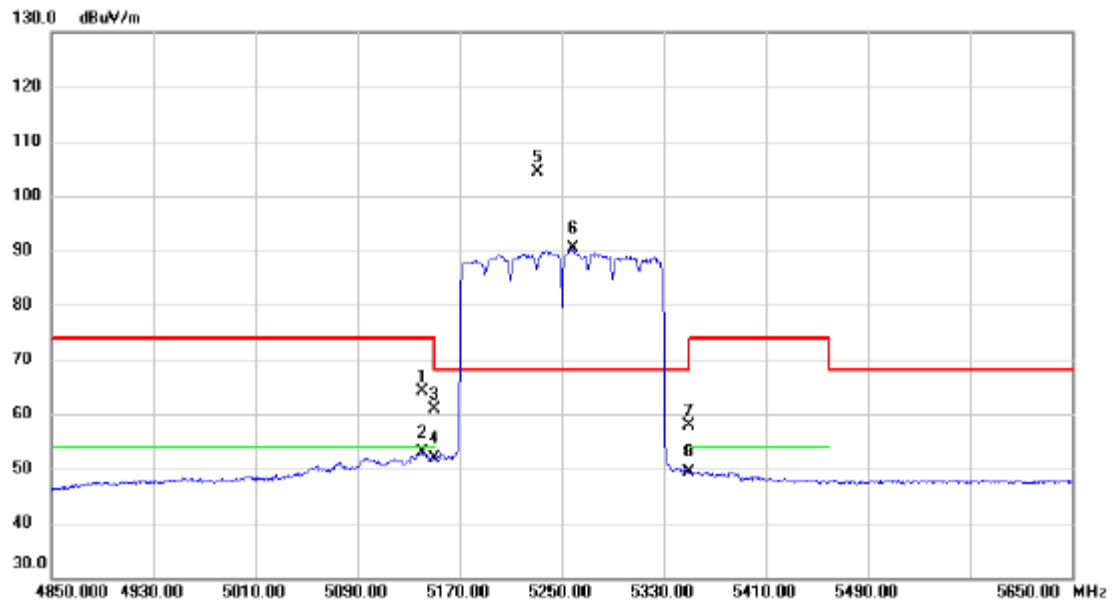


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1       | 5141.200     | 48.95                    | 15.24                   | 64.19                      | 74.00           | -9.81        | peak     |          |
| 2       | 5141.200     | 37.68                    | 15.24                   | 52.92                      | 54.00           | -1.08        | AVG      |          |
| 3       | 5150.000     | 45.72                    | 15.26                   | 60.98                      | 74.00           | -13.02       | peak     |          |
| 4       | 5150.000     | 36.60                    | 15.26                   | 51.86                      | 54.00           | -2.14        | AVG      |          |
| 5 *     | 5231.600     | 88.91                    | 15.46                   | 104.37                     | 68.20           | 36.17        | peak     | No Limit |
| 6 X     | 5258.800     | 74.76                    | 15.52                   | 90.28                      | 68.20           | 22.08        | AVG      | No Limit |
| 7       | 5350.000     | 42.13                    | 15.72                   | 57.85                      | 74.00           | -16.15       | peak     |          |
| 8       | 5350.000     | 33.54                    | 15.72                   | 49.26                      | 54.00           | -4.74        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                           |              |            |
|-----------|-------------------------------------------|--------------|------------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz | Polarization | Horizontal |
|-----------|-------------------------------------------|--------------|------------|

80 dBuV/m

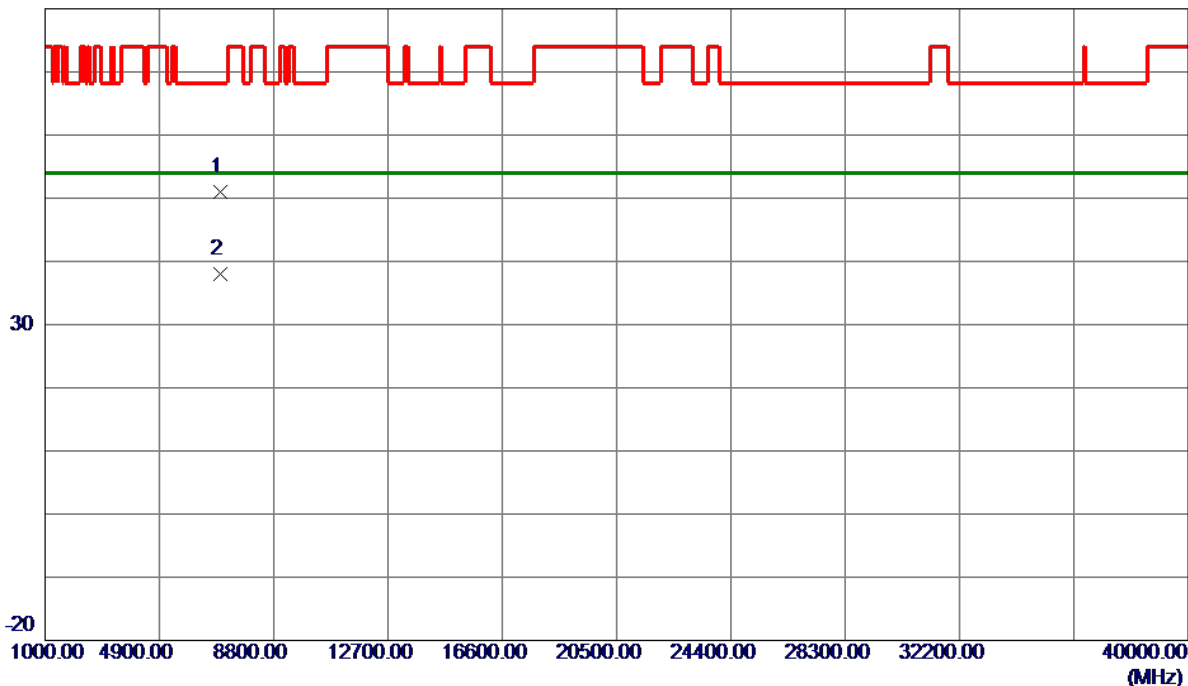


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 7000.4360 | 41.25         | 9.79           | 51.04       | 68.20  | -17.16 | Peak     |         |
| 2 * | 7000.9660 | 28.21         | 9.79           | 38.00       | 54.00  | -16.00 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

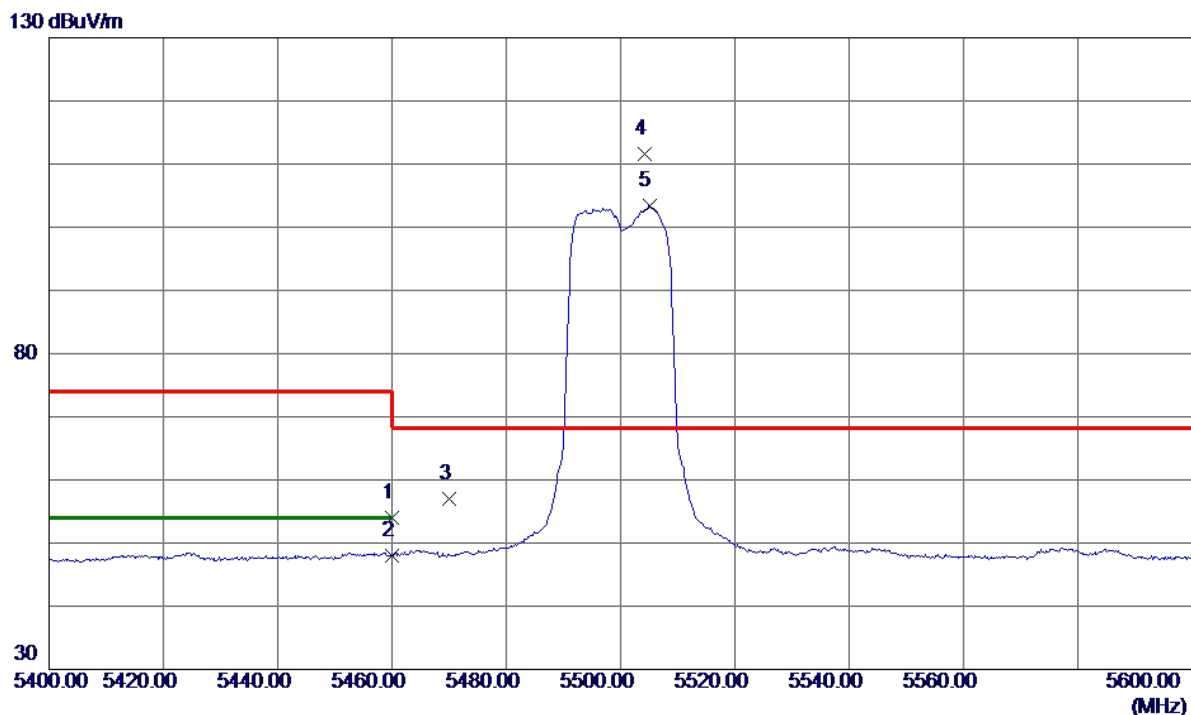


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 38.11                      | 15.97                   | 54.08                     | 74.00           | -19.92       | Peak     |          |
| 2   | 5460.0000    | 31.95                      | 15.97                   | 47.92                     | 54.00           | -6.08        | AVG      |          |
| 3   | 5470.0000    | 41.08                      | 16.00                   | 57.08                     | 68.20           | -11.12       | Peak     |          |
| 4 * | 5504.2000    | 95.51                      | 16.07                   | 111.58                    | 68.20           | 43.38        | Peak     | No Limit |
| 5   | 5505.0000    | 87.24                      | 16.07                   | 103.31                    | 999.00          | -895.69      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

80 dBuV/m

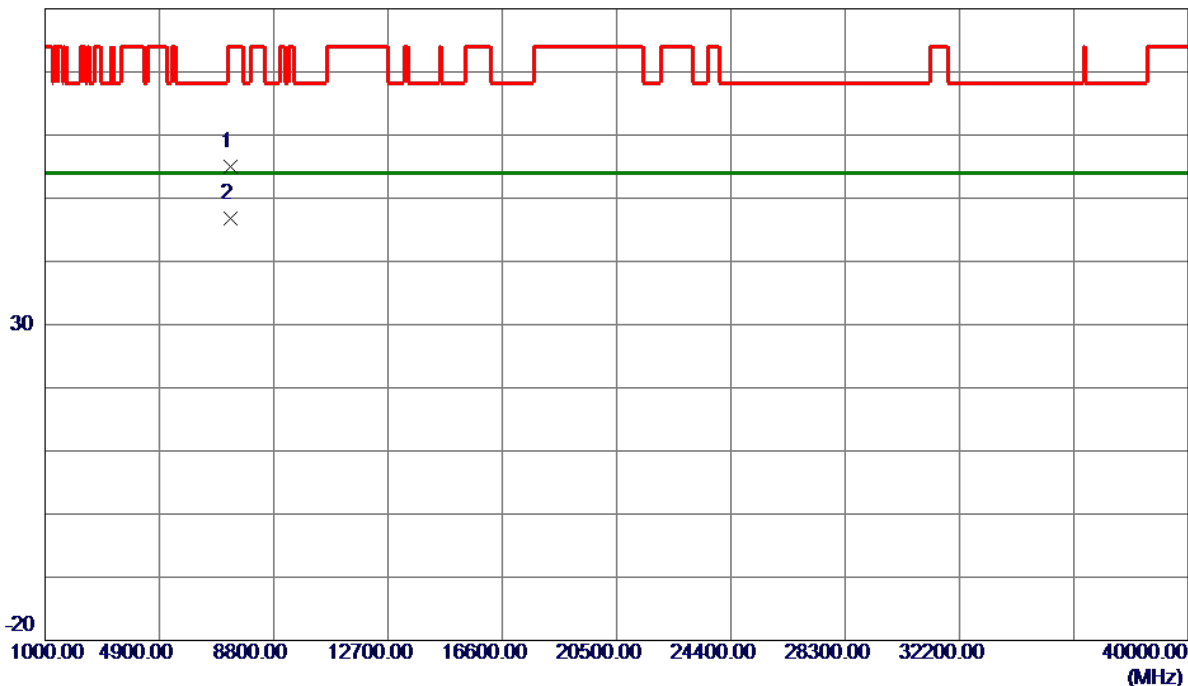


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7333.2050    | 44.58                      | 10.36                   | 54.94                     | 74.00           | -19.06       | Peak     |         |
| 2 * | 7333.2450    | 36.35                      | 10.36                   | 46.71                     | 54.00           | -7.29        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

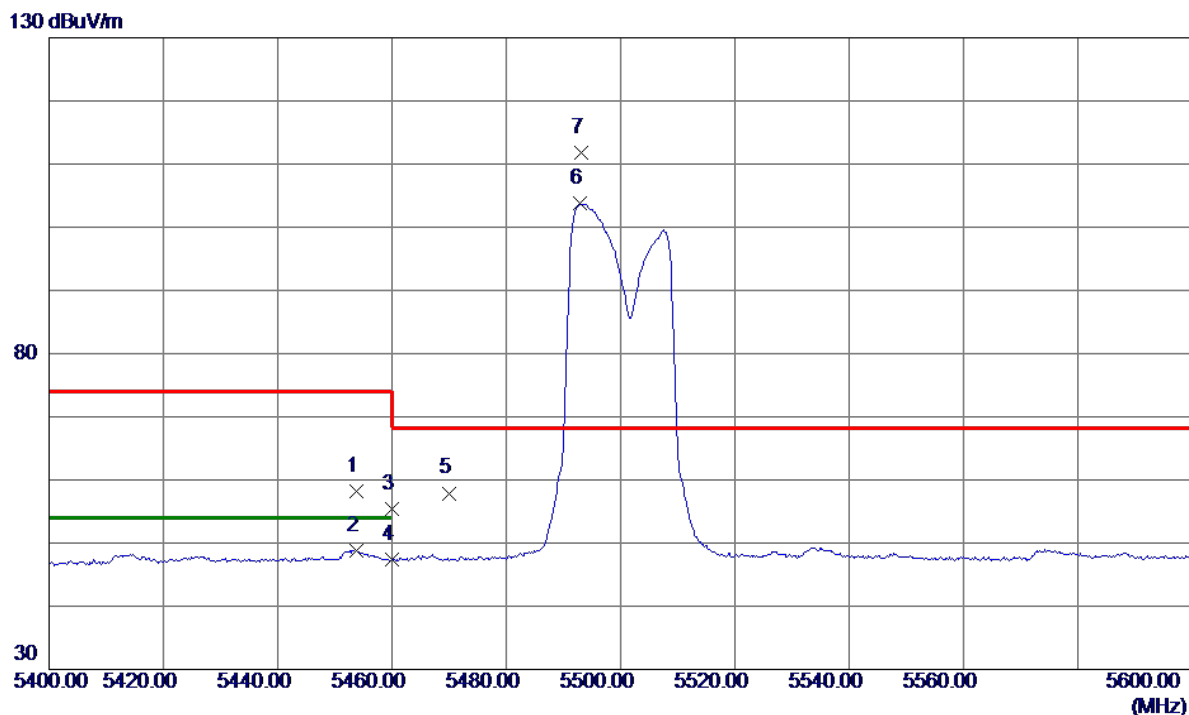


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5453.8000    | 42.26                      | 15.96                   | 58.22                     | 74.00           | -15.78       | Peak     |          |
| 2   | 5453.8000    | 32.82                      | 15.96                   | 48.78                     | 54.00           | -5.22        | AVG      |          |
| 3   | 5460.0000    | 39.50                      | 15.97                   | 55.47                     | 74.00           | -18.53       | Peak     |          |
| 4   | 5460.0000    | 31.34                      | 15.97                   | 47.31                     | 54.00           | -6.69        | AVG      |          |
| 5   | 5470.0000    | 41.90                      | 16.00                   | 57.90                     | 68.20           | -10.30       | Peak     |          |
| 6   | 5492.8000    | 87.73                      | 16.05                   | 103.78                    | 999.00          | -895.22      | AVG      | No Limit |
| 7 * | 5493.2000    | 95.80                      | 16.05                   | 111.85                    | 68.20           | 43.65        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

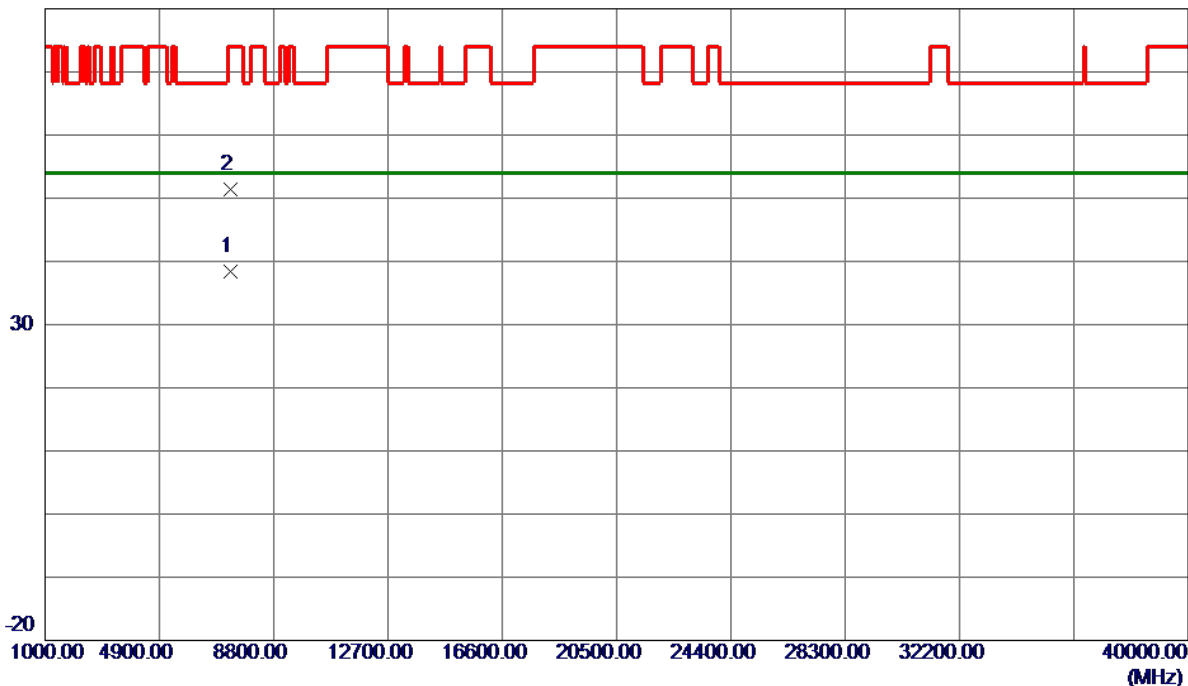


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7332.0260    | 27.98                      | 10.35                   | 38.33                     | 54.00           | -15.67       | AVG      |         |
| 2   | 7332.2920    | 40.96                      | 10.35                   | 51.31                     | 74.00           | -22.69       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

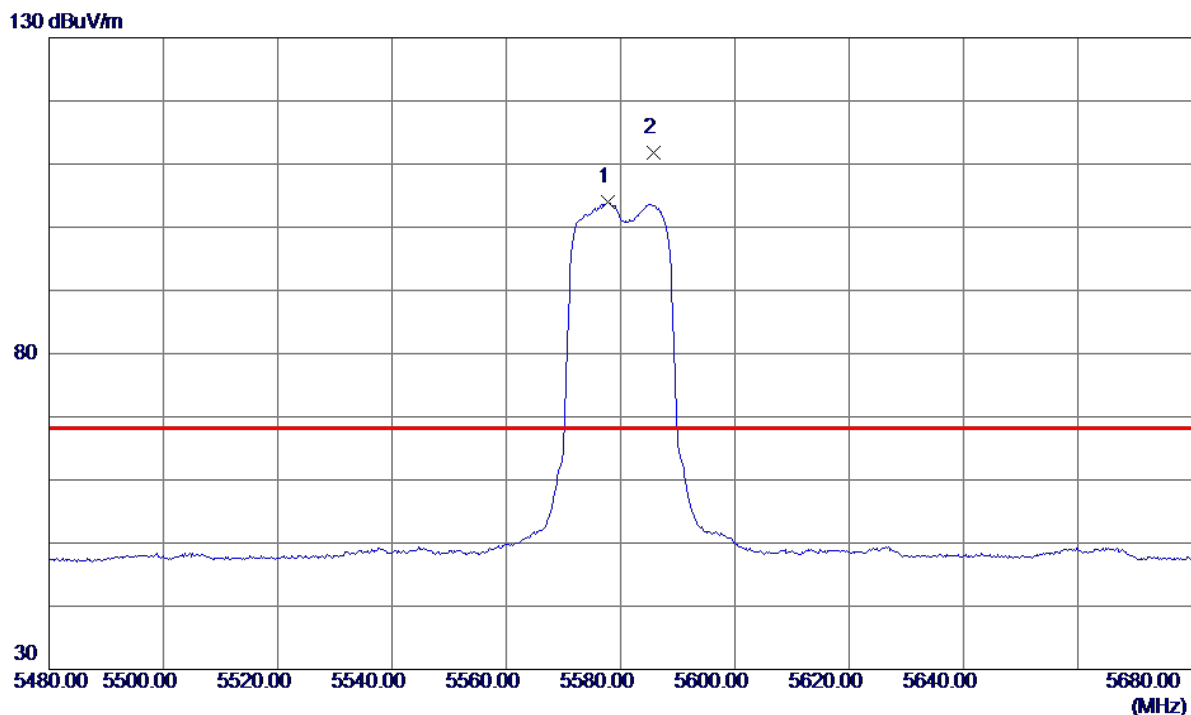


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5577.8000    | 87.82                      | 16.22                   | 104.04                    | 999.00          | -894.96      | AVG      | No Limit |
| 2 * | 5585.8000    | 95.64                      | 16.24                   | 111.88                    | 68.20           | 43.68        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

80 dBuV/m

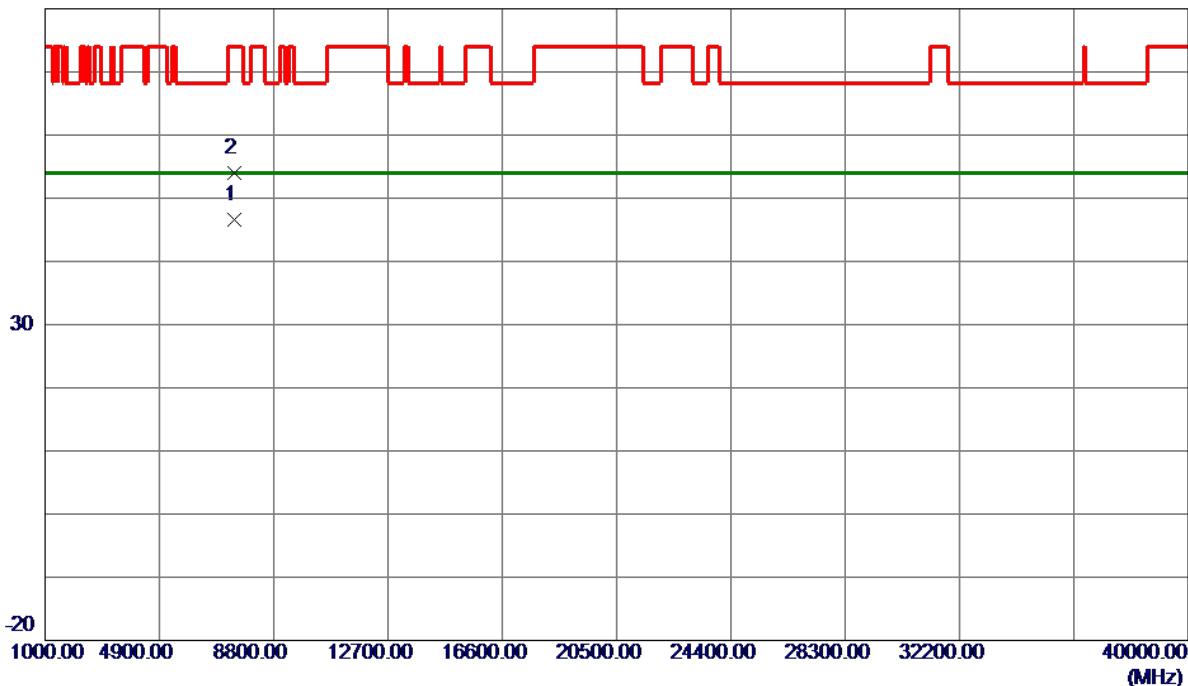


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7439.9950    | 36.08                      | 10.54                   | 46.62                     | 54.00           | -7.38        | AVG      |         |
| 2   | 7440.1100    | 43.38                      | 10.54                   | 53.92                     | 74.00           | -20.08       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

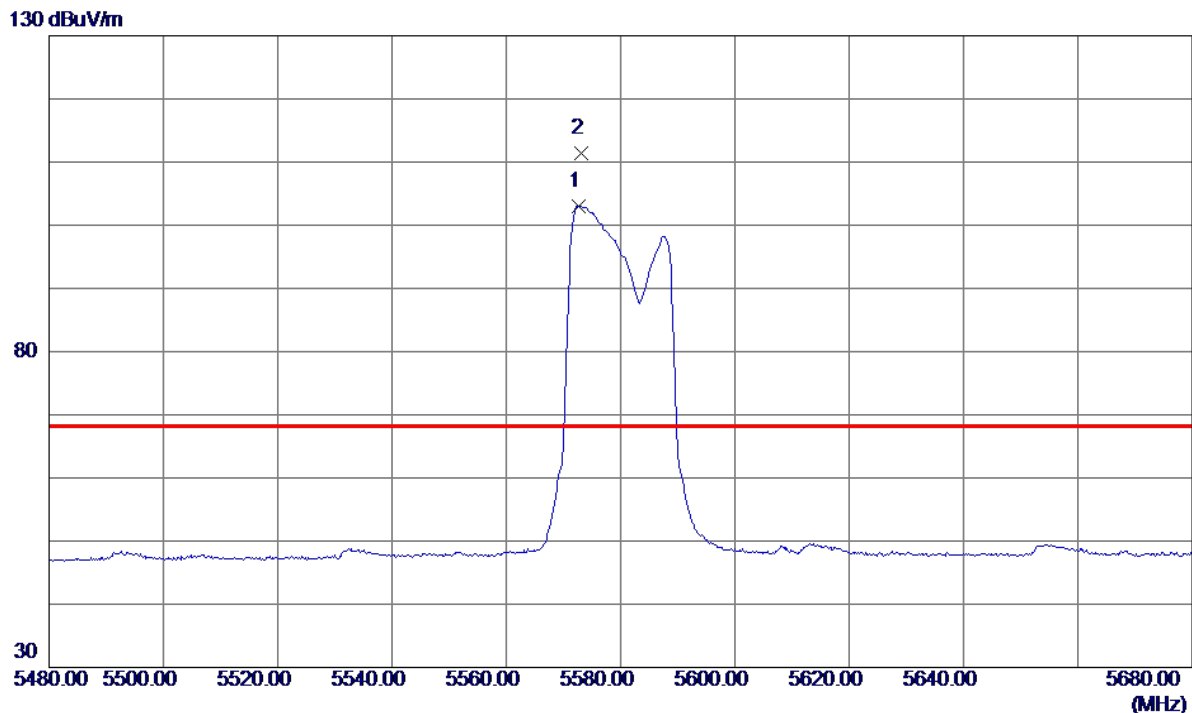


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5572.6000    | 86.77                      | 16.21                   | 102.98                    | 999.00          | -896.02      | AVG      | No Limit |
| 2 * | 5573.2000    | 95.17                      | 16.21                   | 111.38                    | 68.20           | 43.18        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

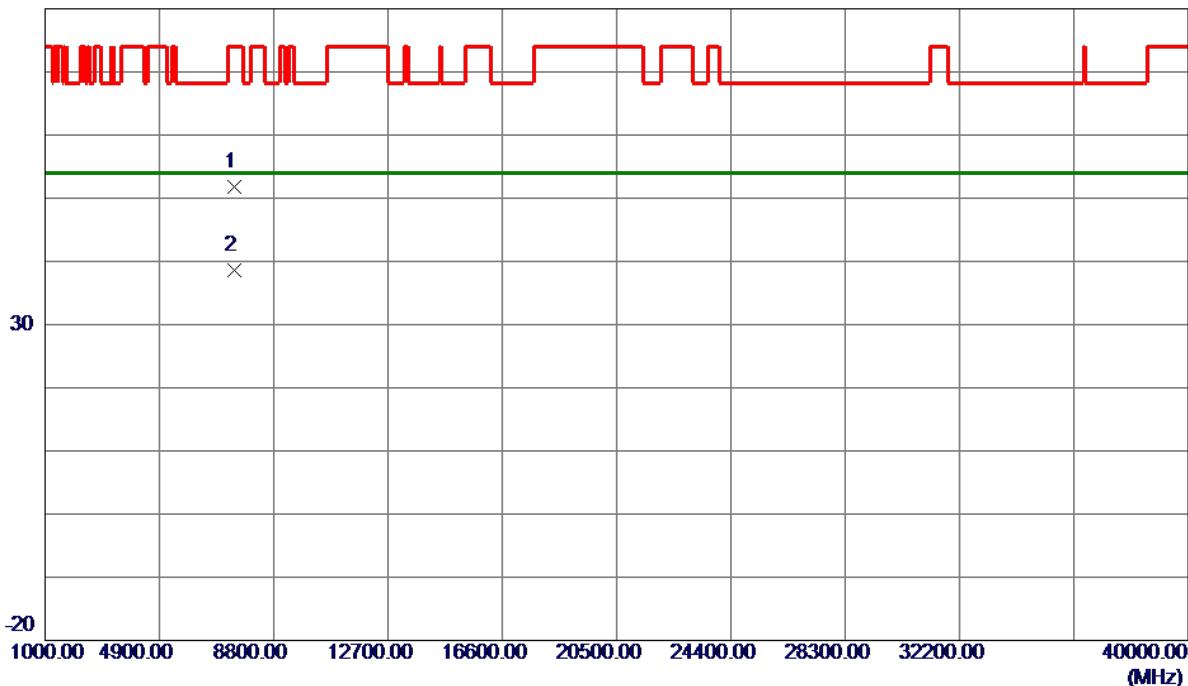


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7439.2380    | 41.24                      | 10.54                   | 51.78                     | 74.00           | -22.22       | Peak     |         |
| 2 * | 7440.9860    | 27.97                      | 10.54                   | 38.51                     | 54.00           | -15.49       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

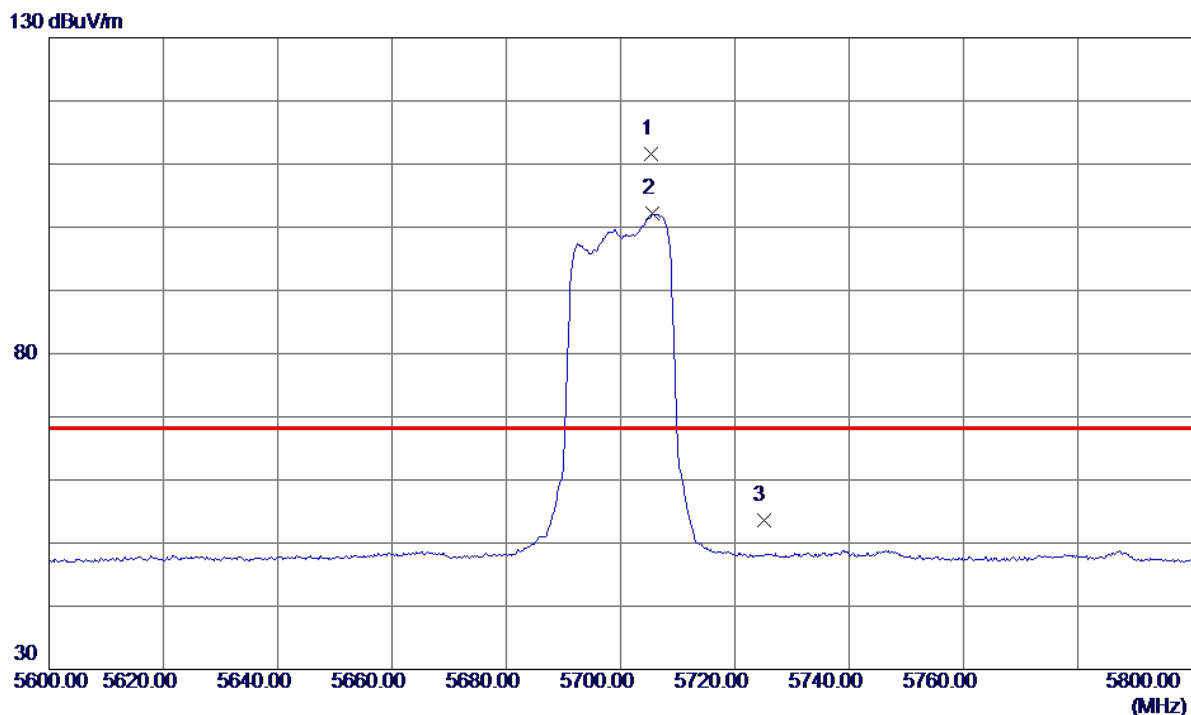


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5705.4000    | 95.08                      | 16.47                   | 111.55                    | 68.20           | 43.35        | Peak     | No Limit |
| 2   | 5705.6000    | 85.68                      | 16.47                   | 102.15                    | 999.00          | -896.85      | AVG      | No Limit |
| 3   | 5725.0000    | 37.08                      | 16.51                   | 53.59                     | 68.20           | -14.61       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

80 dBuV/m

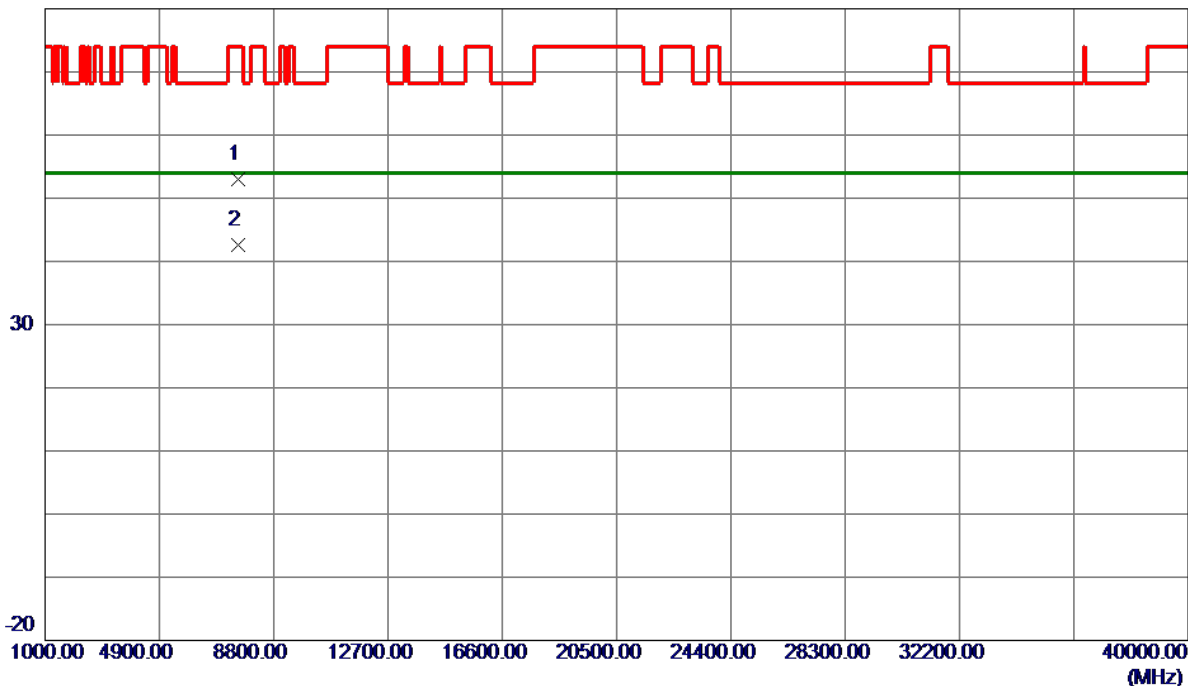


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7600.0000    | 42.43                      | 10.57                   | 53.00                     | 74.00           | -21.00       | Peak     |         |
| 2 * | 7600.0050    | 31.99                      | 10.57                   | 42.56                     | 54.00           | -11.44       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

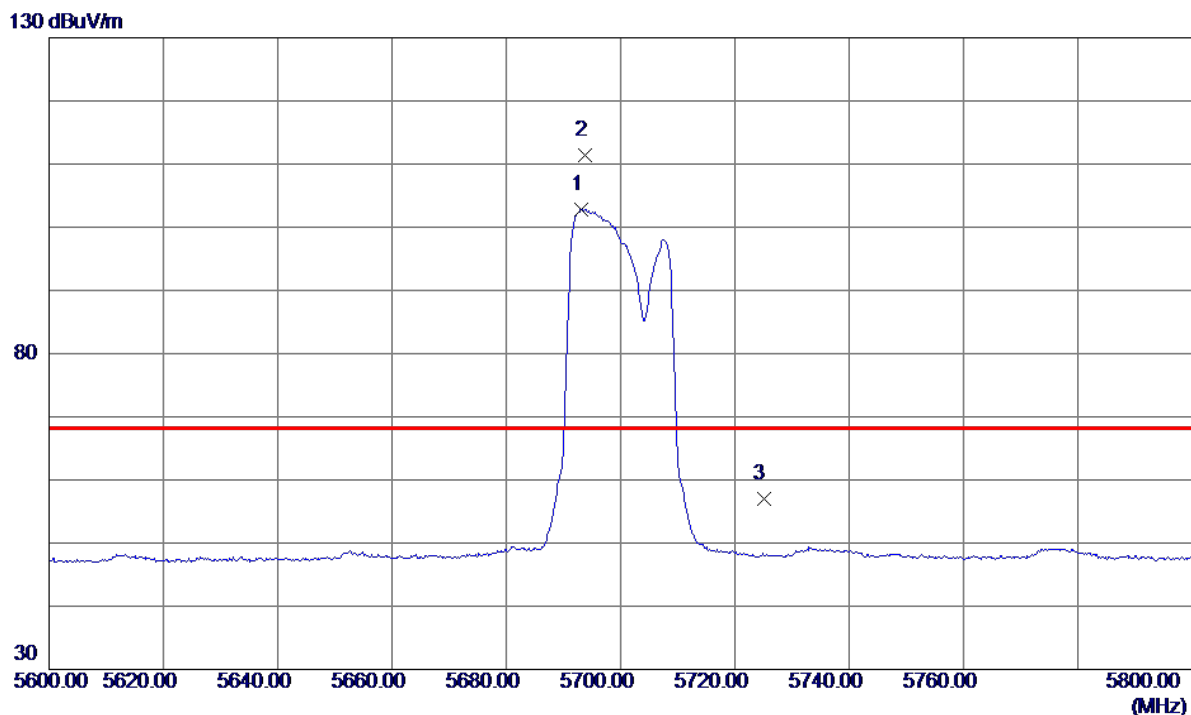


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5693.2000    | 86.31                      | 16.45                   | 102.76                    | 999.00          | -896.24      | AVG      | No Limit |
| 2 * | 5693.8000    | 94.90                      | 16.45                   | 111.35                    | 68.20           | 43.15        | Peak     | No Limit |
| 3   | 5725.0000    | 40.45                      | 16.51                   | 56.96                     | 68.20           | -11.24       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

80 dBuV/m

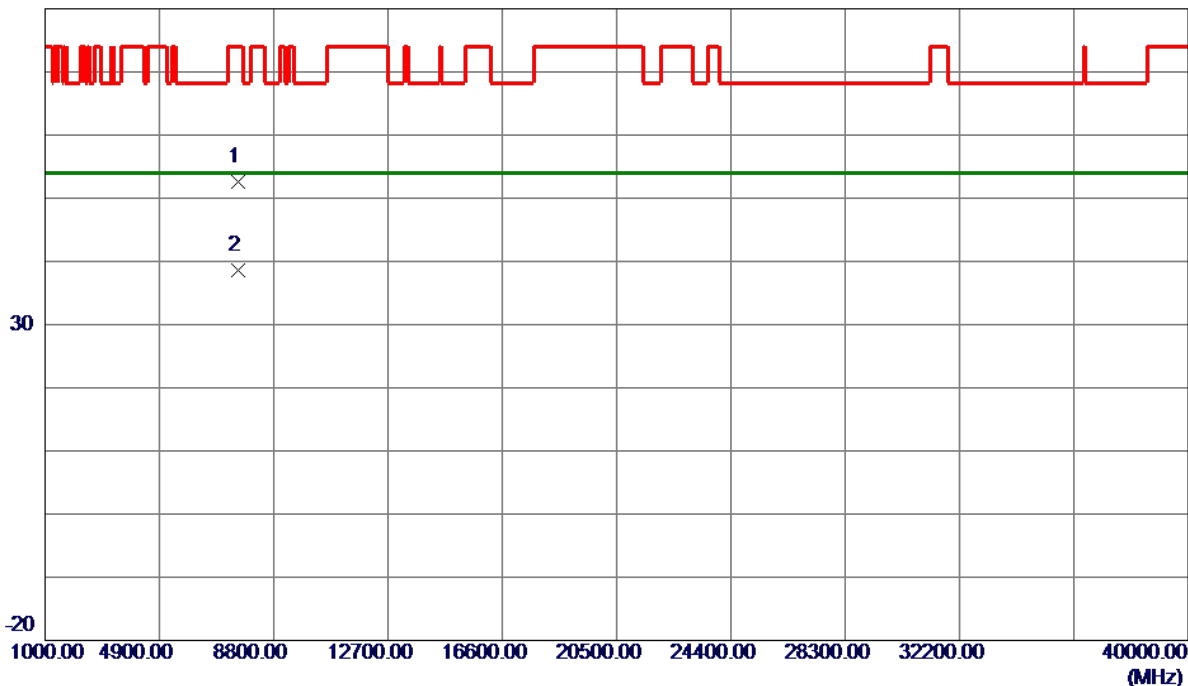


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7599.2840    | 42.06                      | 10.57                   | 52.63                     | 74.00           | -21.37       | Peak     |         |
| 2 * | 7600.4540    | 28.02                      | 10.57                   | 38.59                     | 54.00           | -15.41       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

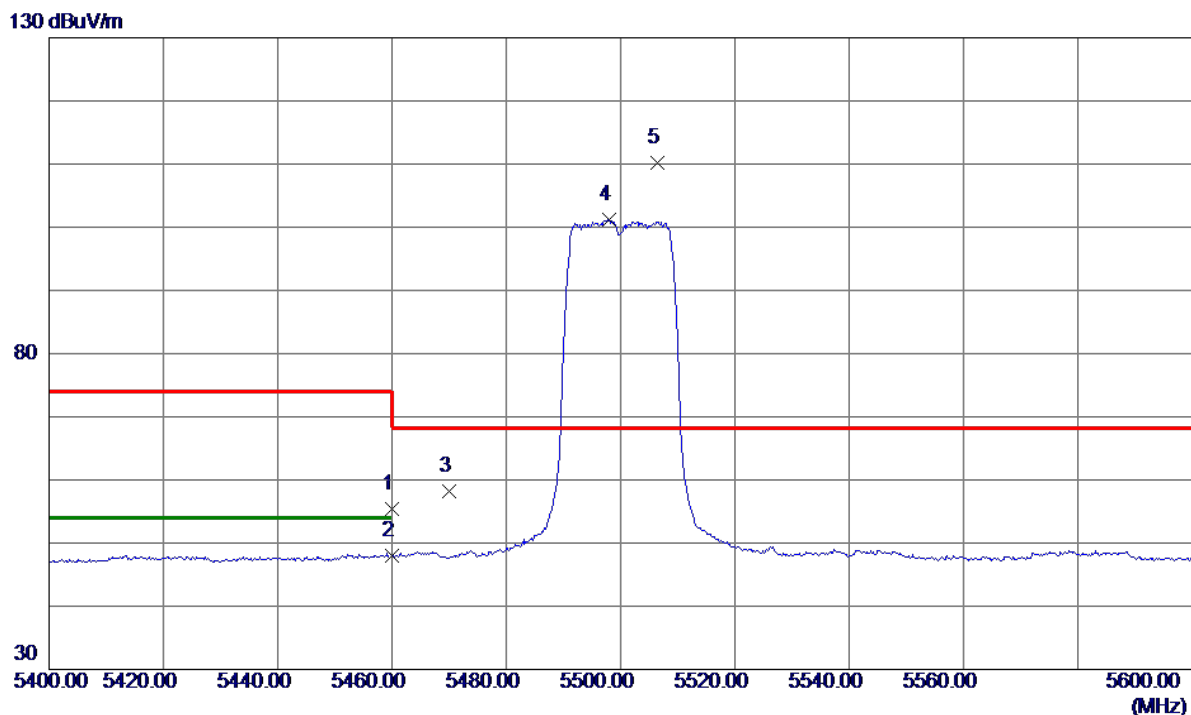


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.51                      | 15.97                   | 55.48                     | 74.00           | -18.52       | Peak     |          |
| 2   | 5460.0000    | 32.02                      | 15.97                   | 47.99                     | 54.00           | -6.01        | AVG      |          |
| 3   | 5470.0000    | 42.18                      | 16.00                   | 58.18                     | 68.20           | -10.02       | Peak     |          |
| 4   | 5498.0000    | 85.22                      | 16.06                   | 101.28                    | 999.00          | -897.72      | AVG      | No Limit |
| 5 * | 5506.4000    | 94.11                      | 16.08                   | 110.19                    | 68.20           | 41.99        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

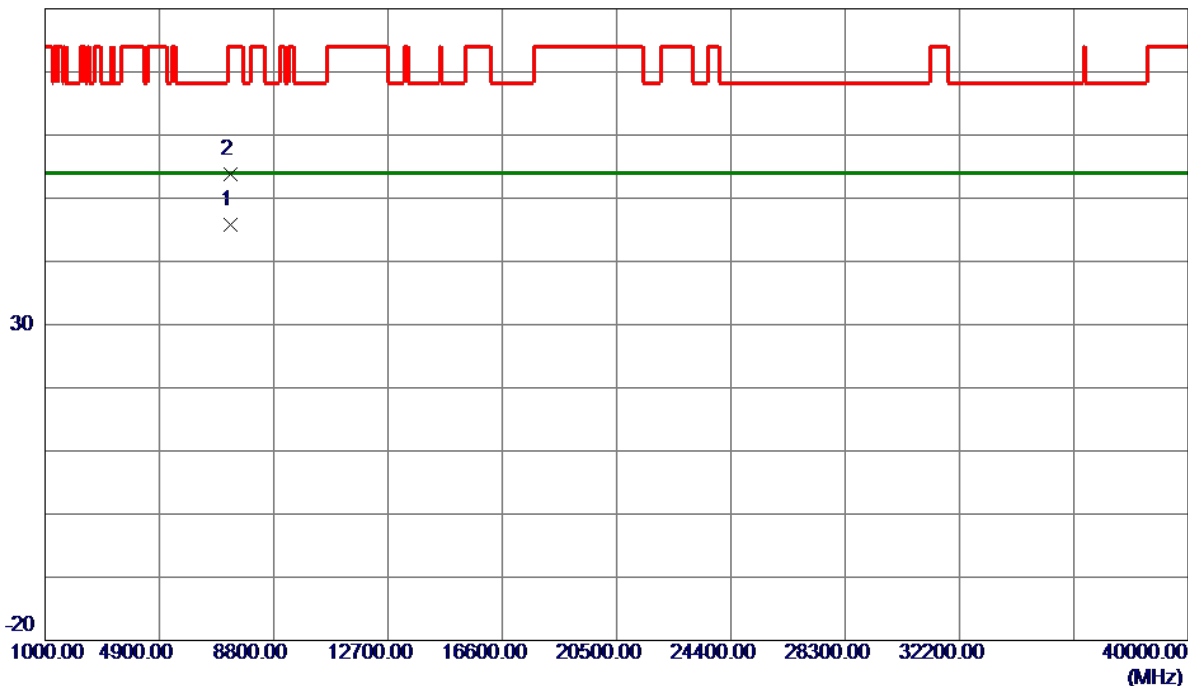


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7333.3600    | 35.48                      | 10.36                   | 45.84                     | 54.00           | -8.16        | AVG      |         |
| 2   | 7333.6700    | 43.42                      | 10.36                   | 53.78                     | 74.00           | -20.22       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

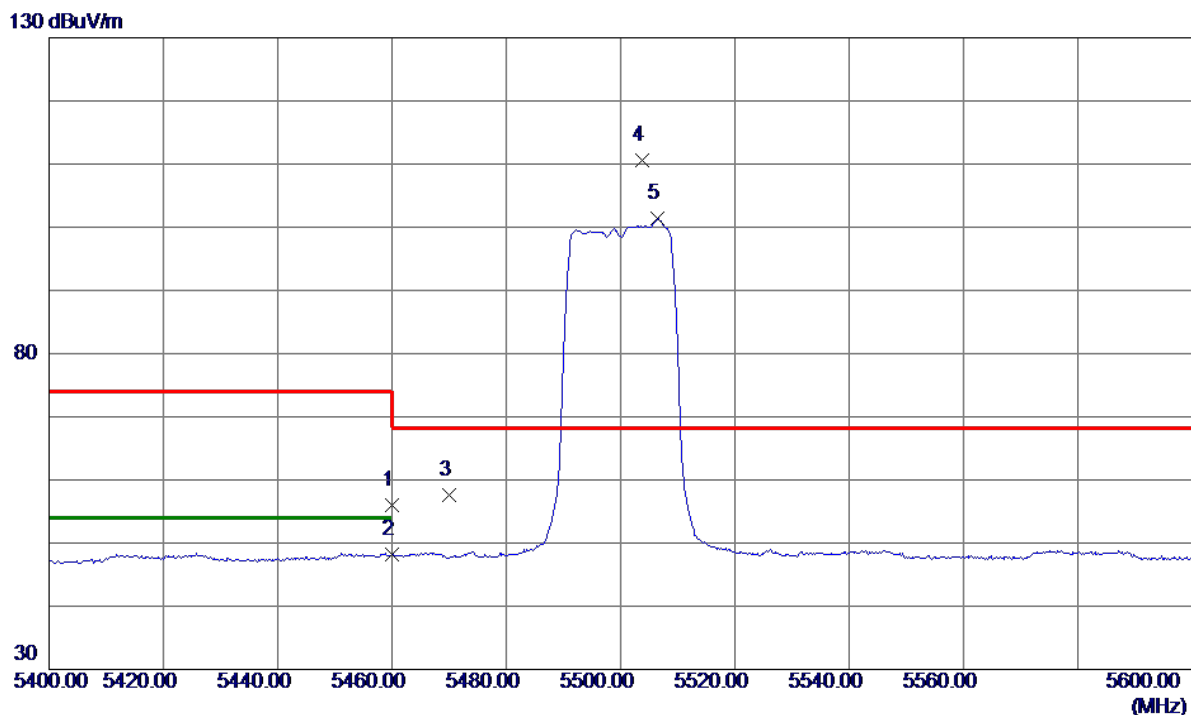


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.97                      | 15.97                   | 55.94                     | 74.00           | -18.06       | Peak     |          |
| 2   | 5460.0000    | 32.27                      | 15.97                   | 48.24                     | 54.00           | -5.76        | AVG      |          |
| 3   | 5470.0000    | 41.56                      | 16.00                   | 57.56                     | 68.20           | -10.64       | Peak     |          |
| 4 * | 5503.8000    | 94.59                      | 16.07                   | 110.66                    | 68.20           | 42.46        | Peak     | No Limit |
| 5   | 5506.4000    | 85.35                      | 16.08                   | 101.43                    | 999.00          | -897.57      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

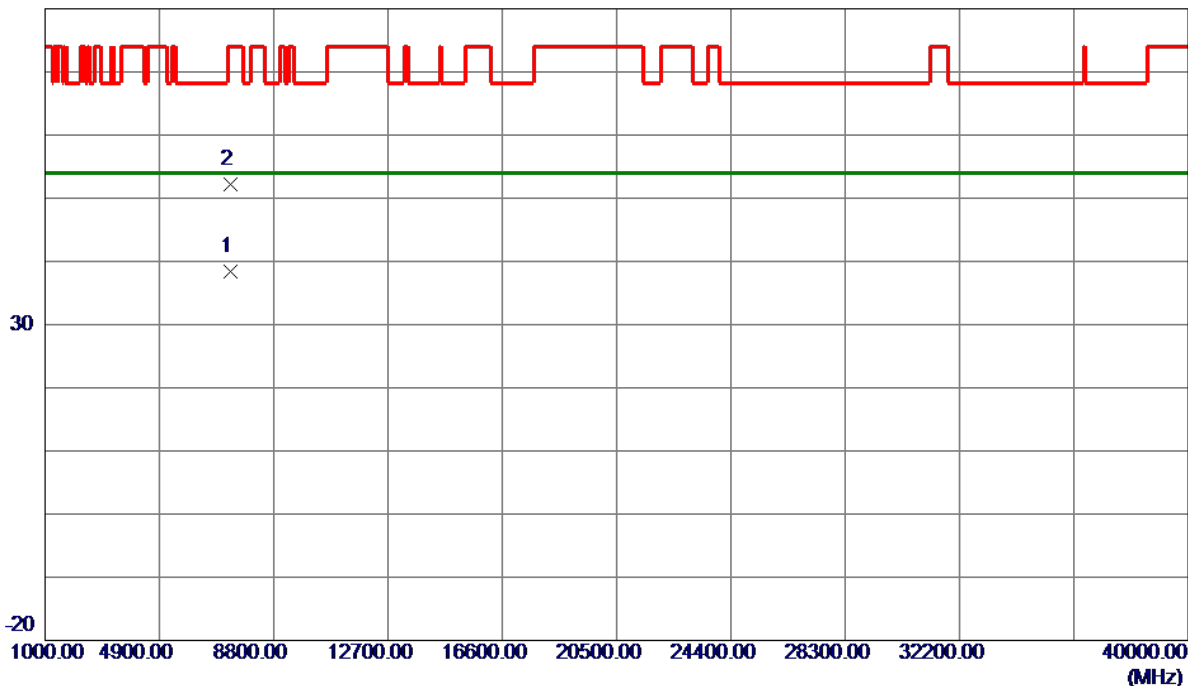


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7332.1060    | 28.09                      | 10.35                   | 38.44                     | 54.00           | -15.56       | AVG      |         |
| 2   | 7332.3860    | 41.77                      | 10.36                   | 52.13                     | 74.00           | -21.87       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

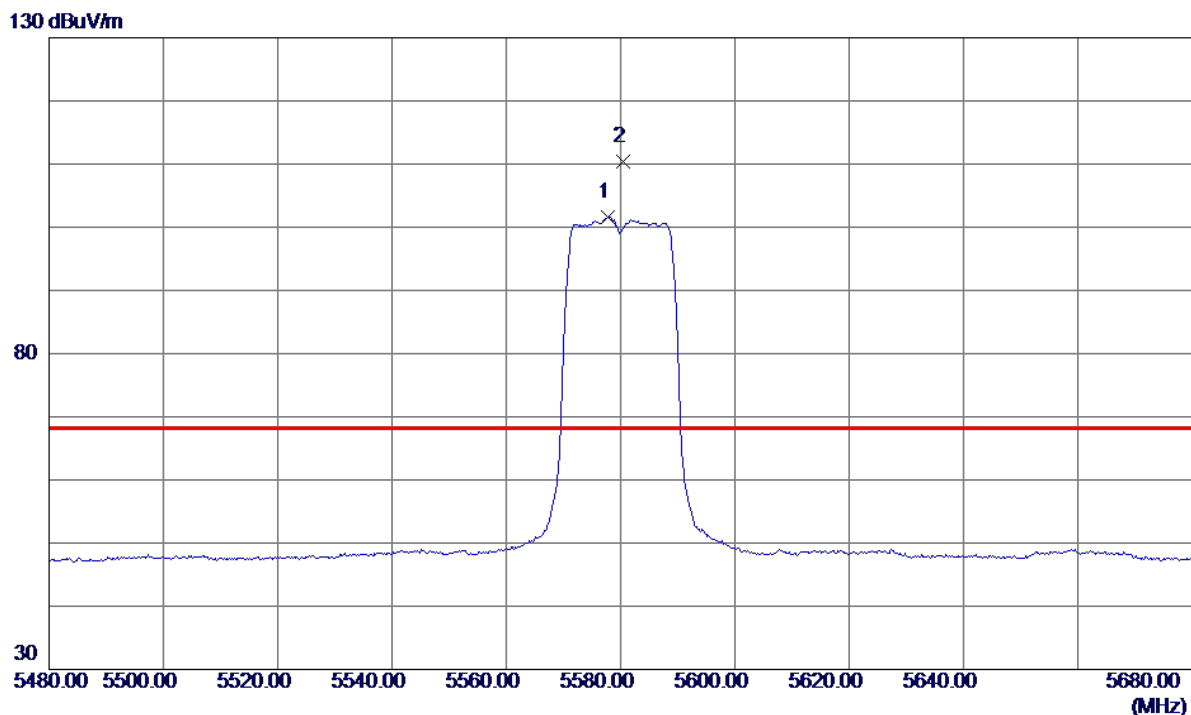


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5577.8000    | 85.40                      | 16.22                   | 101.62                    | 999.00          | -897.38      | AVG      | No Limit |
| 2 * | 5580.4000    | 94.20                      | 16.22                   | 110.42                    | 68.20           | 42.22        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

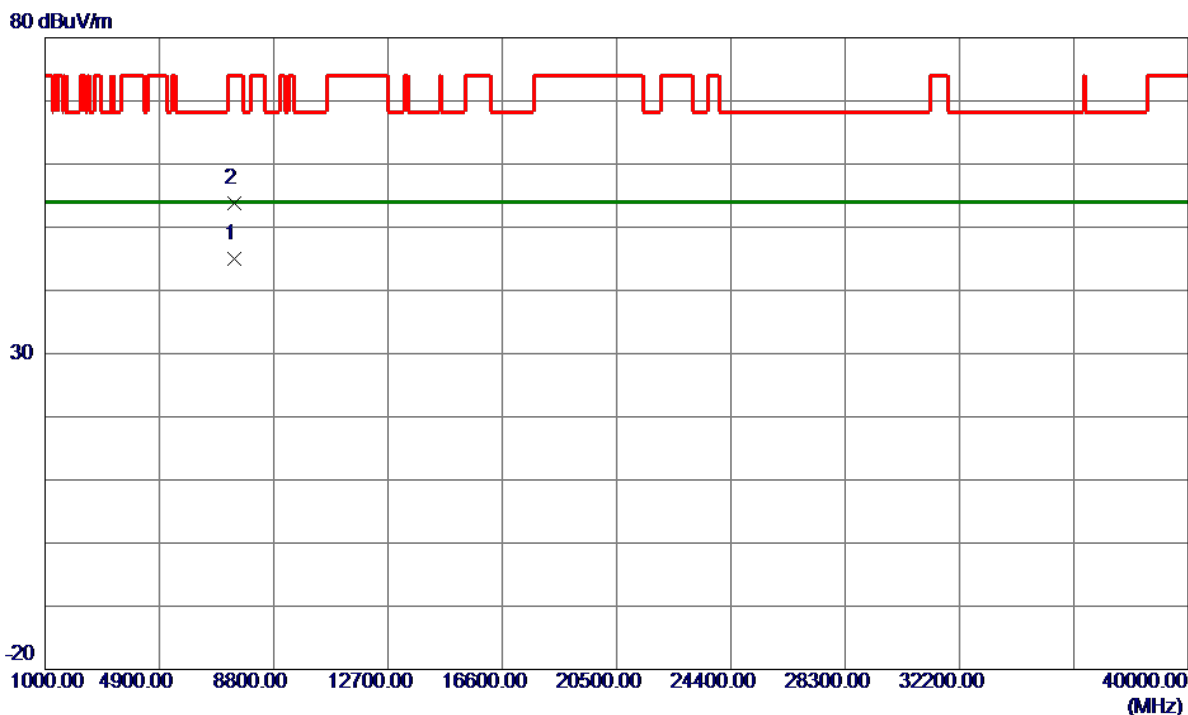


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7439.9100    | 34.43                      | 10.54                   | 44.97                     | 54.00           | -9.03        | AVG      |         |
| 2   | 7440.0250    | 43.20                      | 10.54                   | 53.74                     | 74.00           | -20.26       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

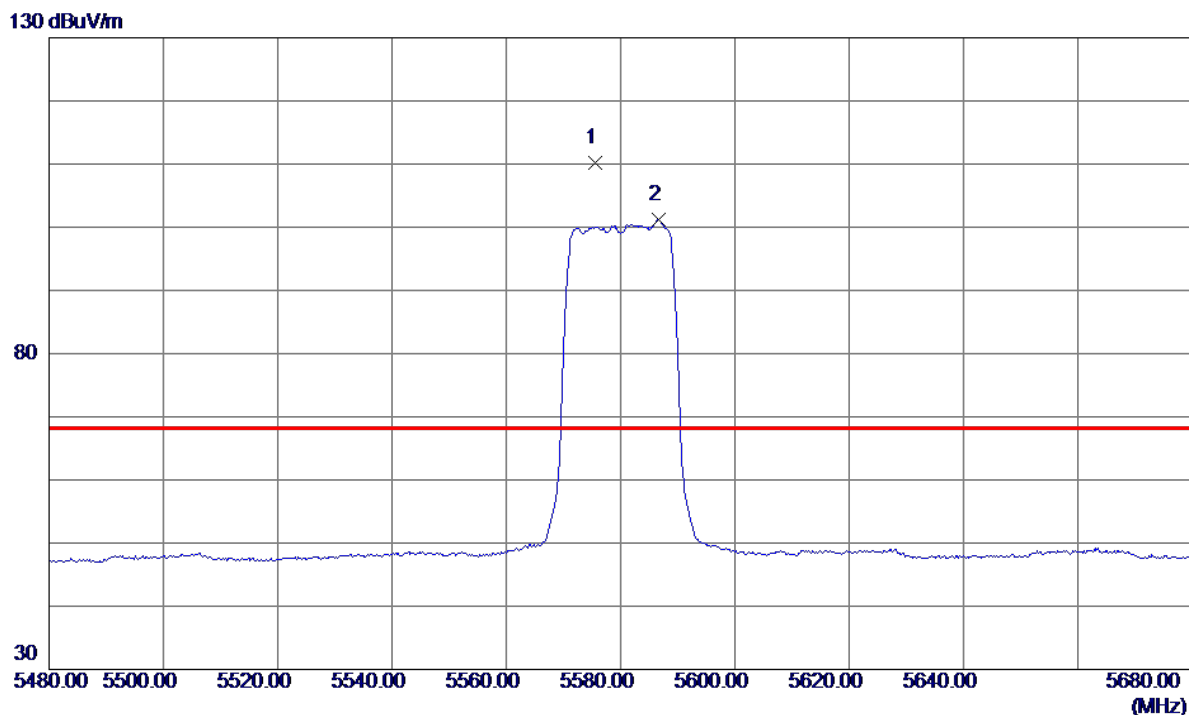


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5575.6000    | 94.06                      | 16.22                   | 110.28                    | 68.20           | 42.08        | Peak     | No Limit |
| 2   | 5586.6000    | 85.03                      | 16.24                   | 101.27                    | 999.00          | -897.73      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

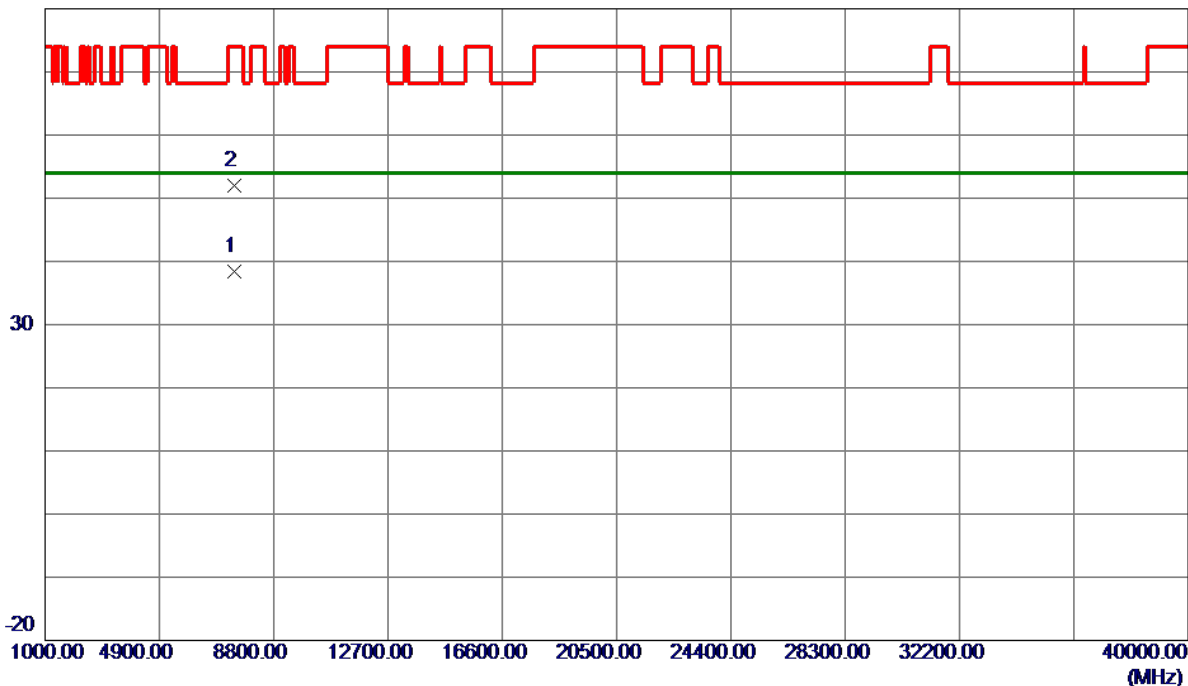


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7439.0180    | 27.77                      | 10.54                   | 38.31                     | 54.00           | -15.69       | AVG      |         |
| 2   | 7440.4920    | 41.45                      | 10.54                   | 51.99                     | 74.00           | -22.01       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

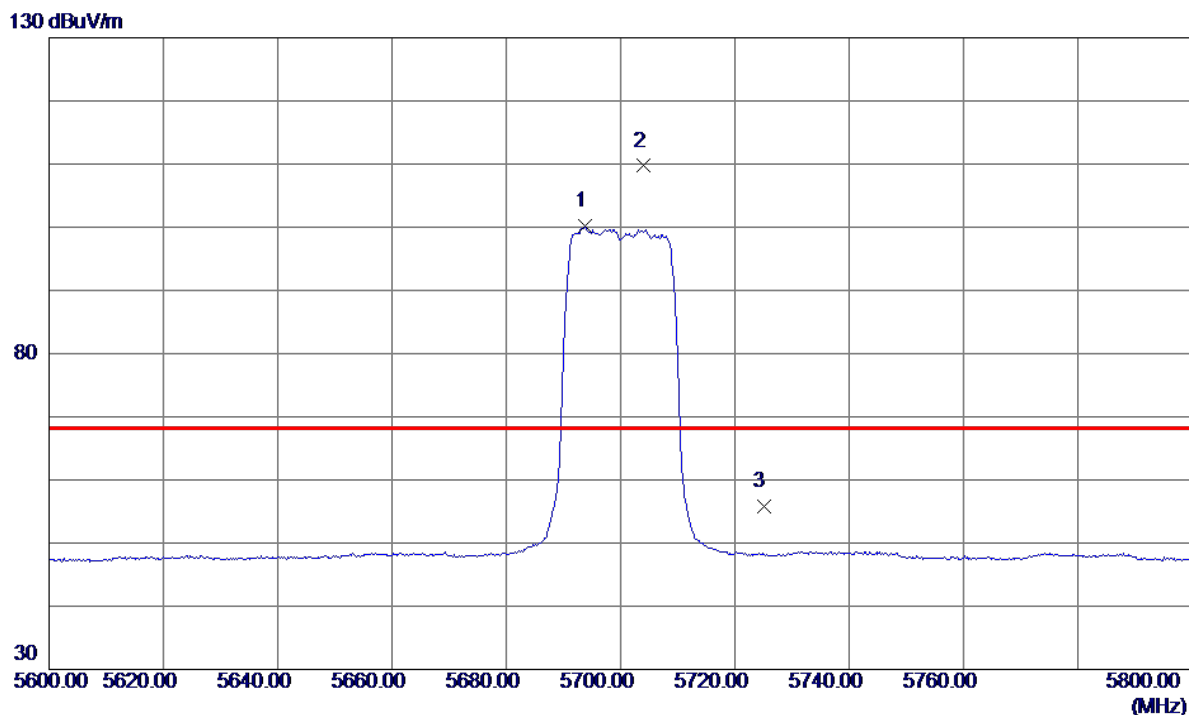


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5693.8000    | 83.70                      | 16.45                   | 100.15                    | 999.00          | -898.85      | AVG      | No Limit |
| 2 * | 5704.0000    | 93.23                      | 16.47                   | 109.70                    | 68.20           | 41.50        | Peak     | No Limit |
| 3   | 5725.0000    | 39.32                      | 16.51                   | 55.83                     | 68.20           | -12.37       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

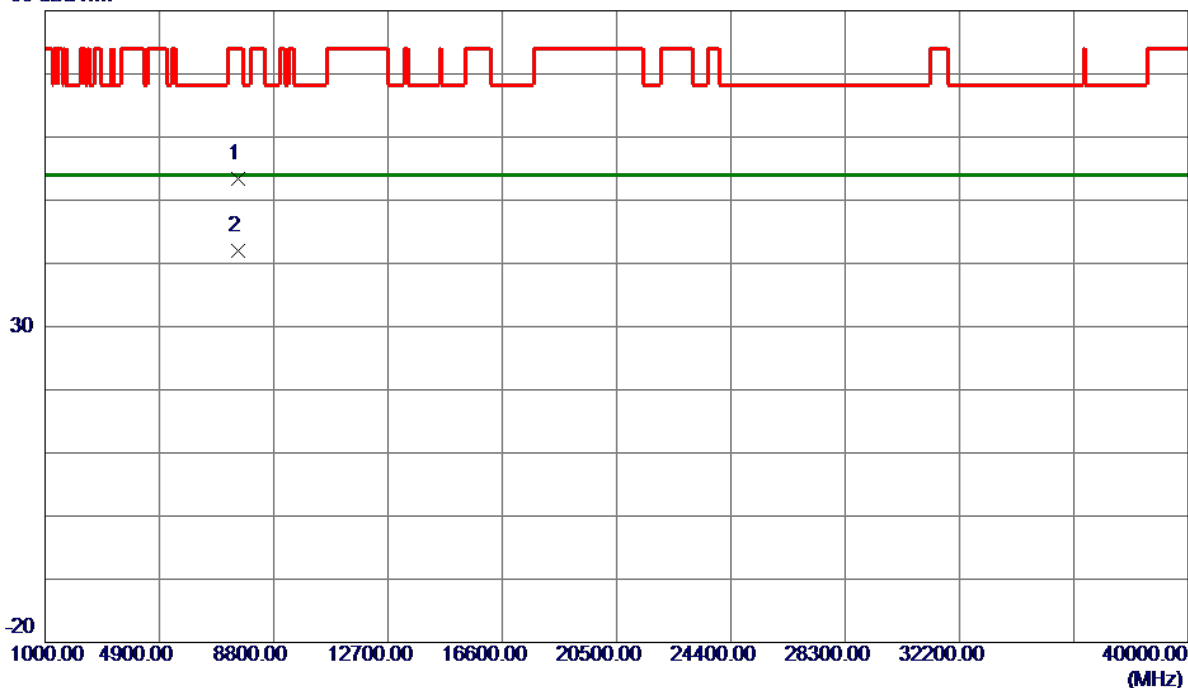


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7599.7100    | 42.91                      | 10.57                   | 53.48                     | 74.00           | -20.52       | Peak     |         |
| 2 * | 7600.0450    | 31.52                      | 10.57                   | 42.09                     | 54.00           | -11.91       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

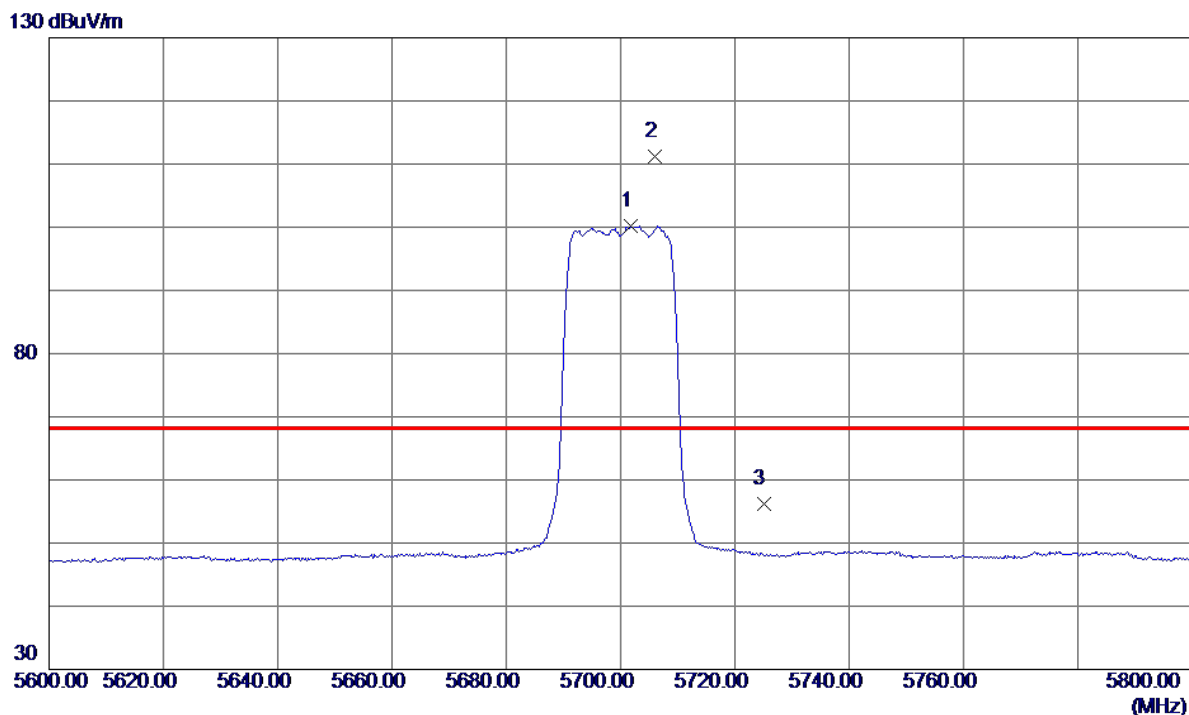


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5701.8000    | 83.69                      | 16.47                   | 100.16                    | 999.00          | -898.84      | AVG      | No Limit |
| 2 * | 5706.0000    | 94.77                      | 16.47                   | 111.24                    | 68.20           | 43.04        | Peak     | No Limit |
| 3   | 5725.0000    | 39.60                      | 16.51                   | 56.11                     | 68.20           | -12.09       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

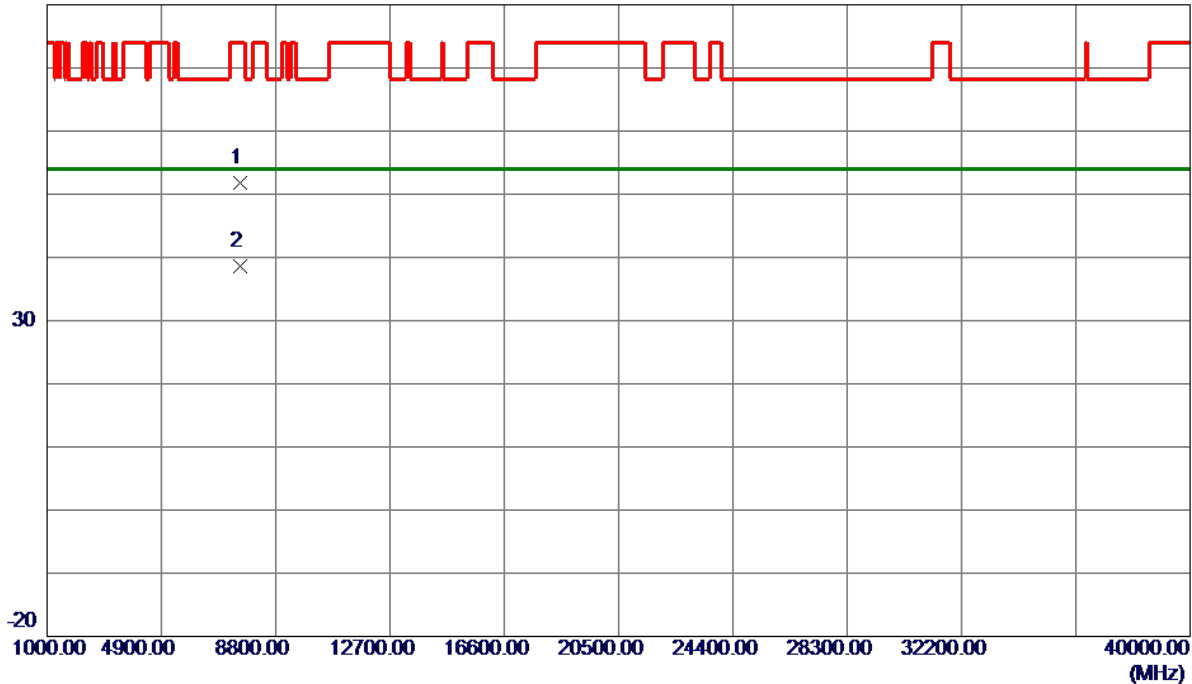


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7599.3800    | 41.24                      | 10.57                   | 51.81                     | 74.00           | -22.19       | Peak     |         |
| 2 * | 7600.5460    | 28.00                      | 10.57                   | 38.57                     | 54.00           | -15.43       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

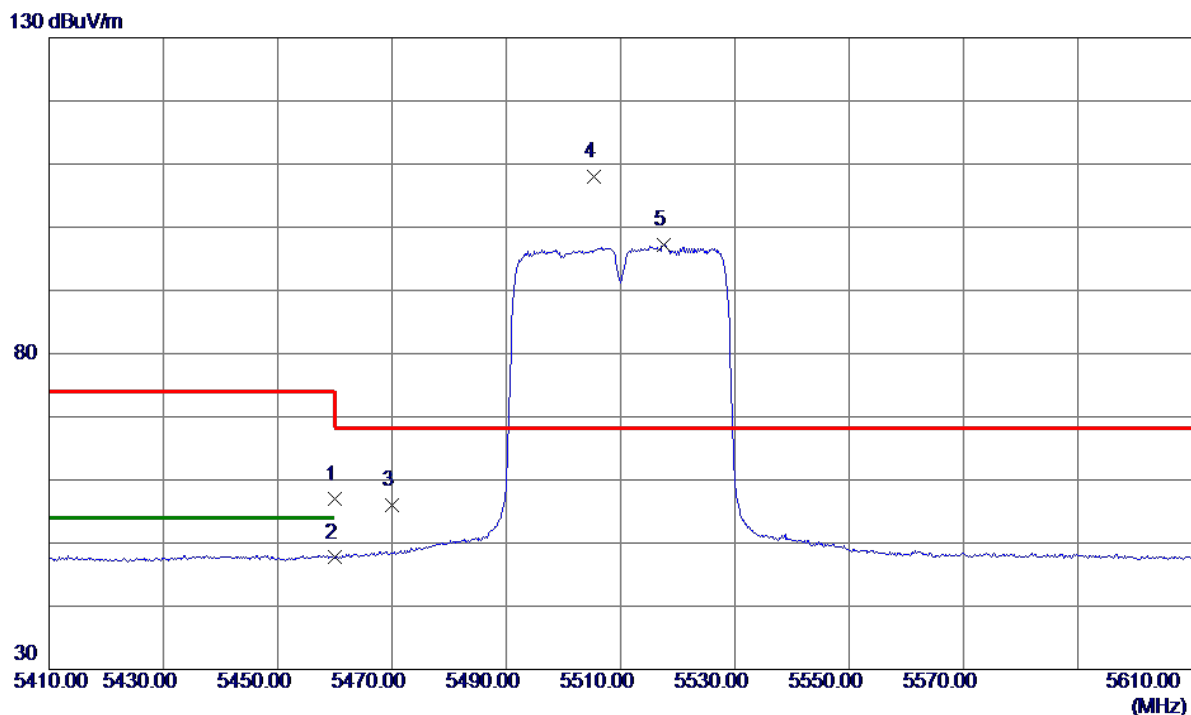


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.93                      | 15.97                   | 56.90                     | 74.00           | -17.10       | Peak     |          |
| 2   | 5460.0000    | 31.73                      | 15.97                   | 47.70                     | 54.00           | -6.30        | AVG      |          |
| 3   | 5470.0000    | 39.91                      | 16.00                   | 55.91                     | 68.20           | -12.29       | Peak     |          |
| 4 * | 5505.4000    | 91.83                      | 16.08                   | 107.91                    | 68.20           | 39.71        | Peak     | No Limit |
| 5   | 5517.6000    | 81.17                      | 16.10                   | 97.27                     | 999.00          | -901.73      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

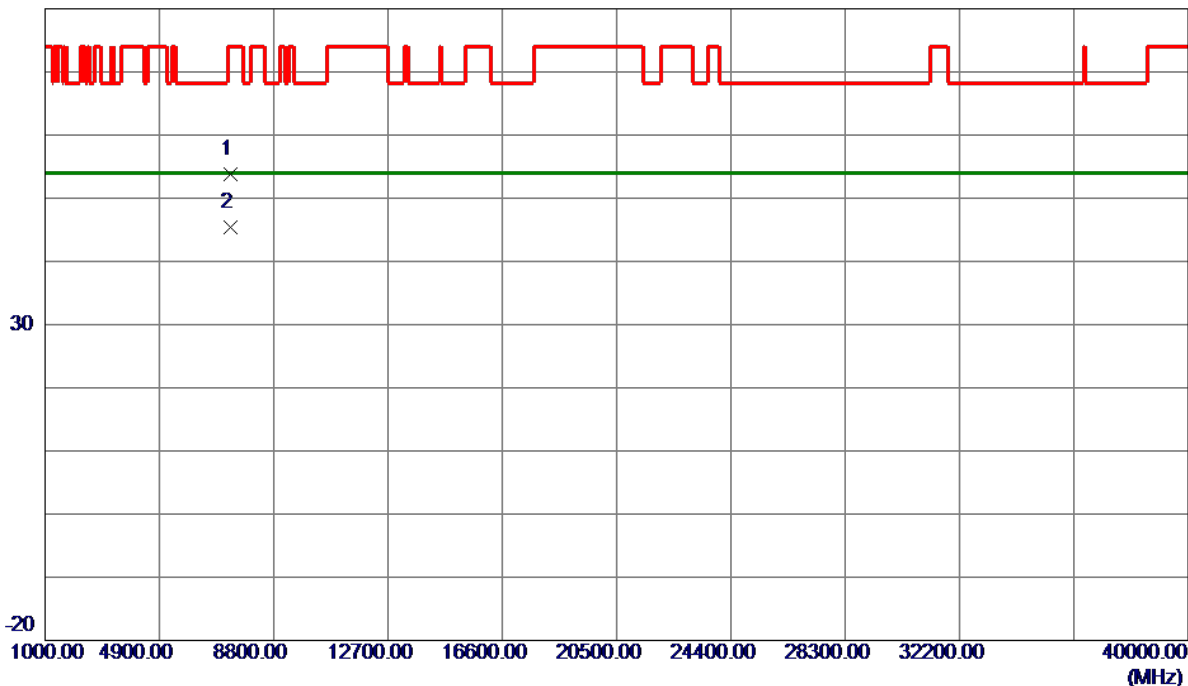


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7346.4800    | 43.45                      | 10.38                   | 53.83                     | 74.00           | -20.17       | Peak     |         |
| 2 * | 7346.6950    | 35.04                      | 10.38                   | 45.42                     | 54.00           | -8.58        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

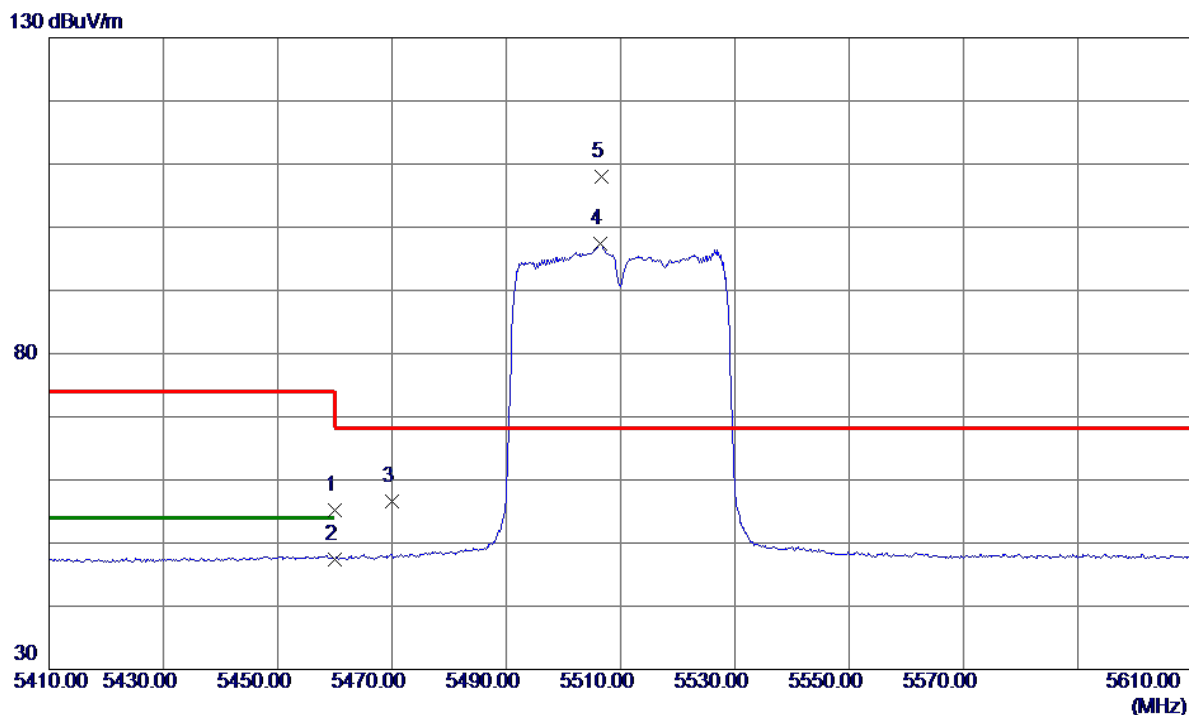


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.29                      | 15.97                   | 55.26                     | 74.00           | -18.74       | Peak     |          |
| 2   | 5460.0000    | 31.43                      | 15.97                   | 47.40                     | 54.00           | -6.60        | AVG      |          |
| 3   | 5470.0000    | 40.57                      | 16.00                   | 56.57                     | 68.20           | -11.63       | Peak     |          |
| 4   | 5506.4000    | 81.23                      | 16.08                   | 97.31                     | 999.00          | -901.69      | AVG      | No Limit |
| 5 * | 5506.6000    | 92.02                      | 16.08                   | 108.10                    | 68.20           | 39.90        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

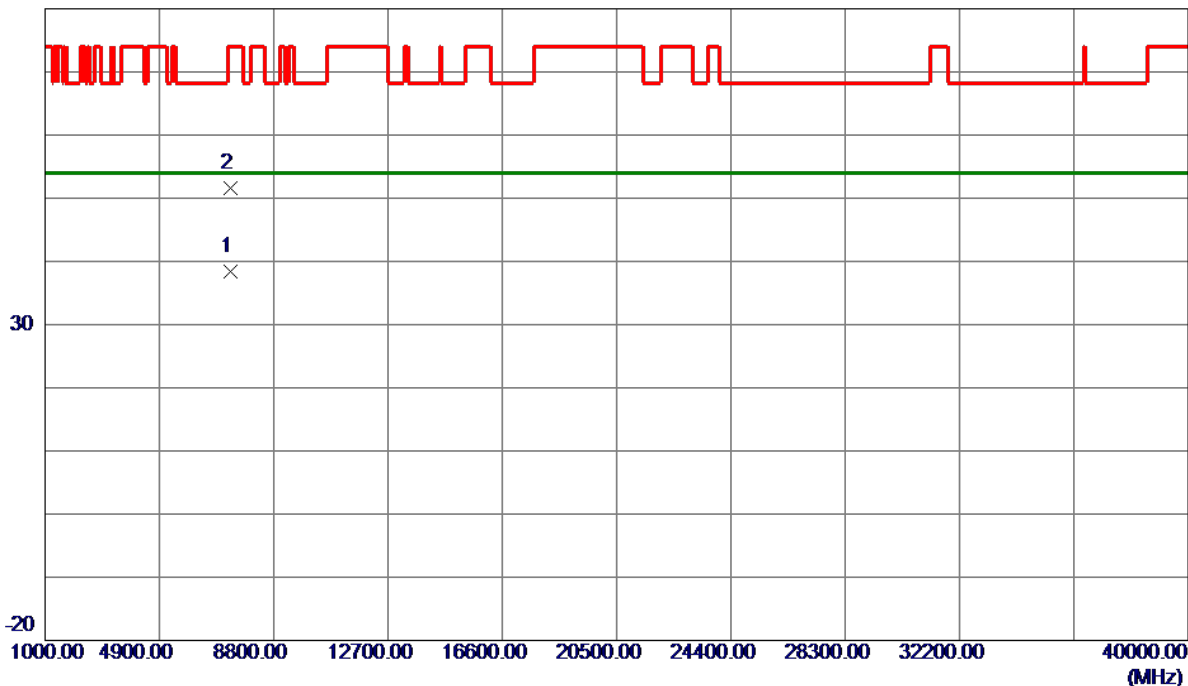


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7346.0360    | 28.11                      | 10.38                   | 38.49                     | 54.00           | -15.51       | AVG      |         |
| 2   | 7347.0620    | 41.23                      | 10.38                   | 51.61                     | 74.00           | -22.39       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

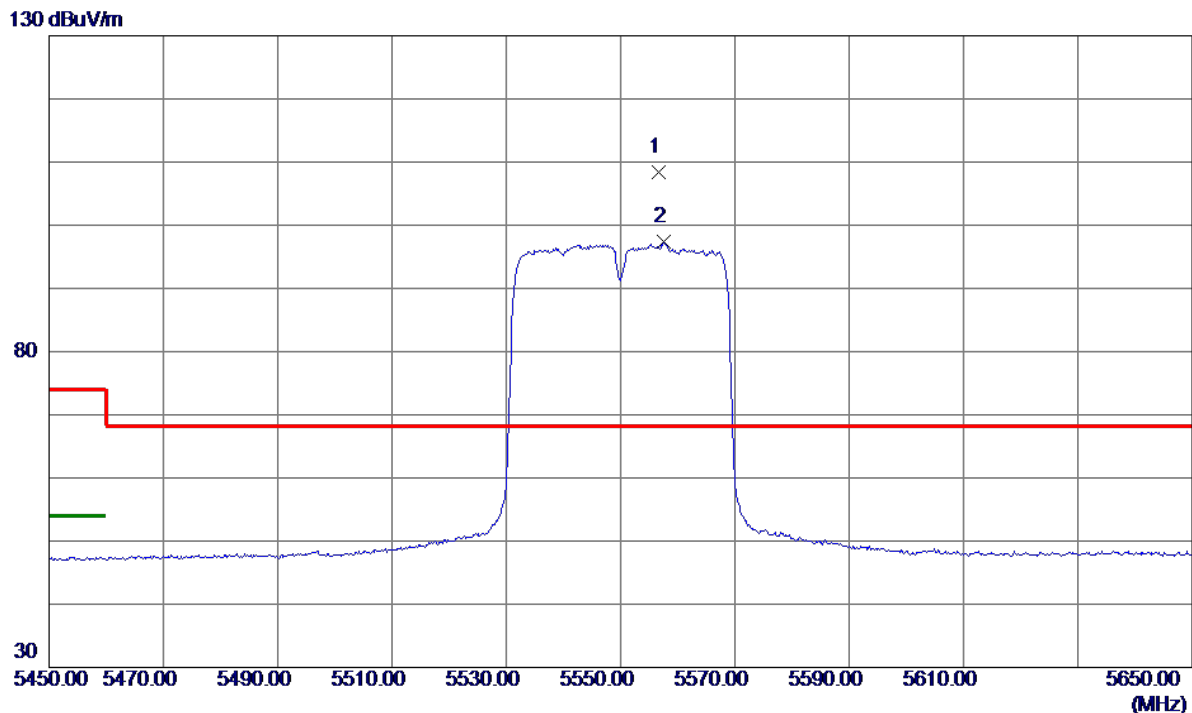


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5556.6000    | 92.29                      | 16.18                   | 108.47                    | 68.20           | 40.27        | Peak     | No Limit |
| 2   | 5557.6000    | 81.15                      | 16.18                   | 97.33                     | 999.00          | -901.67      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

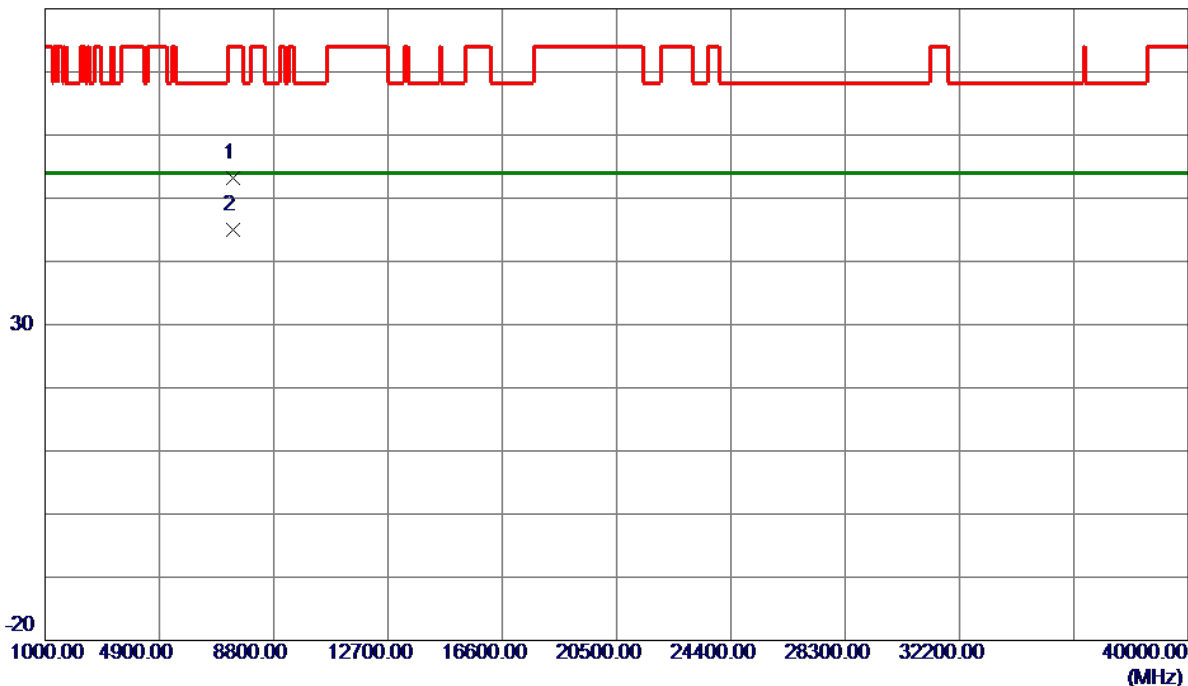


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7399.9450    | 42.70                      | 10.47                   | 53.17                     | 74.00           | -20.83       | Peak     |         |
| 2 * | 7400.1050    | 34.58                      | 10.47                   | 45.05                     | 54.00           | -8.95        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

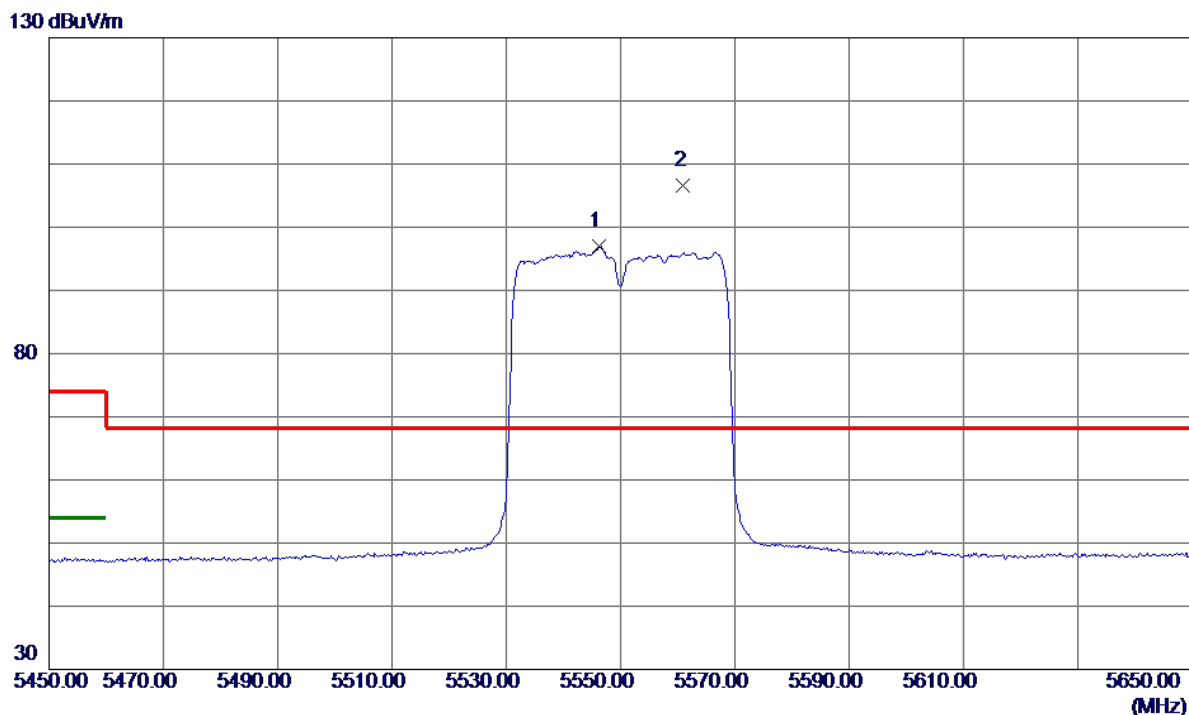


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5546.2000    | 80.84                      | 16.16                   | 97.00                     | 999.00          | -902.00      | AVG      | No Limit |
| 2 * | 5561.0000    | 90.45                      | 16.19                   | 106.64                    | 68.20           | 38.44        | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

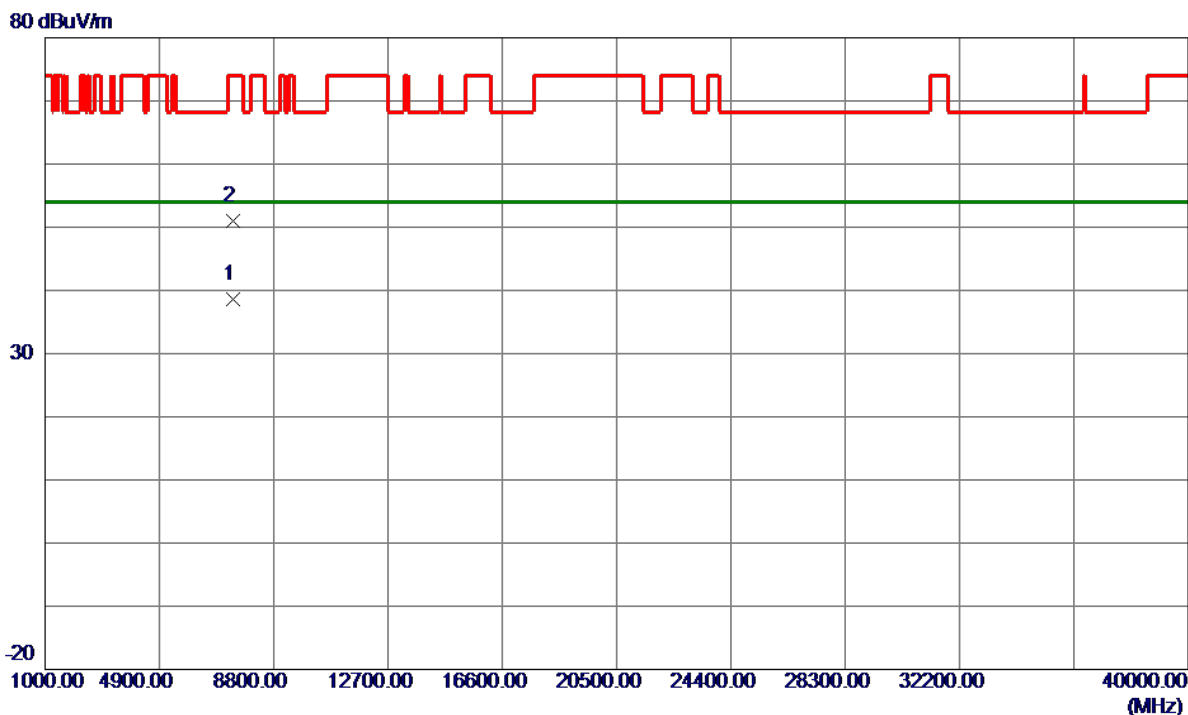


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7399.0240    | 28.21                      | 10.47                   | 38.68                     | 54.00           | -15.32       | AVG      |         |
| 2   | 7400.5640    | 40.56                      | 10.47                   | 51.03                     | 74.00           | -22.97       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

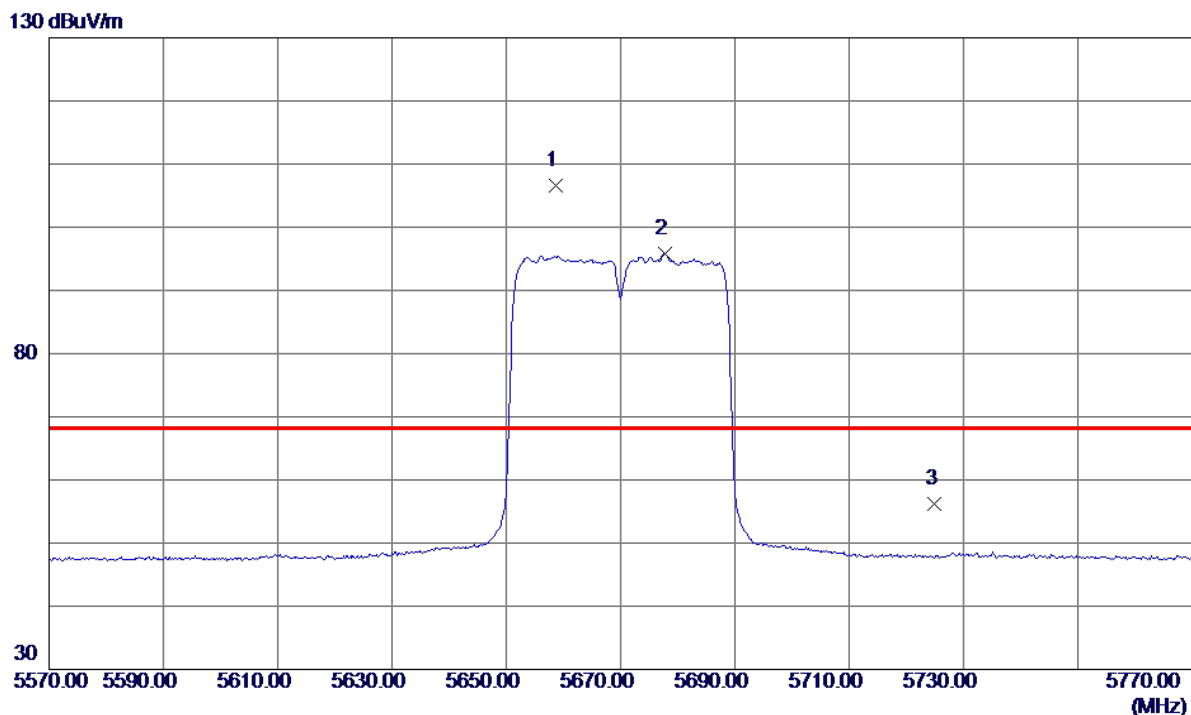


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5658.6000    | 90.14                      | 16.38                   | 106.52                    | 68.20           | 38.32        | Peak     | No Limit |
| 2   | 5677.8000    | 79.40                      | 16.42                   | 95.82                     | 999.00          | -903.18      | AVG      | No Limit |
| 3   | 5725.0000    | 39.62                      | 16.51                   | 56.13                     | 68.20           | -12.07       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

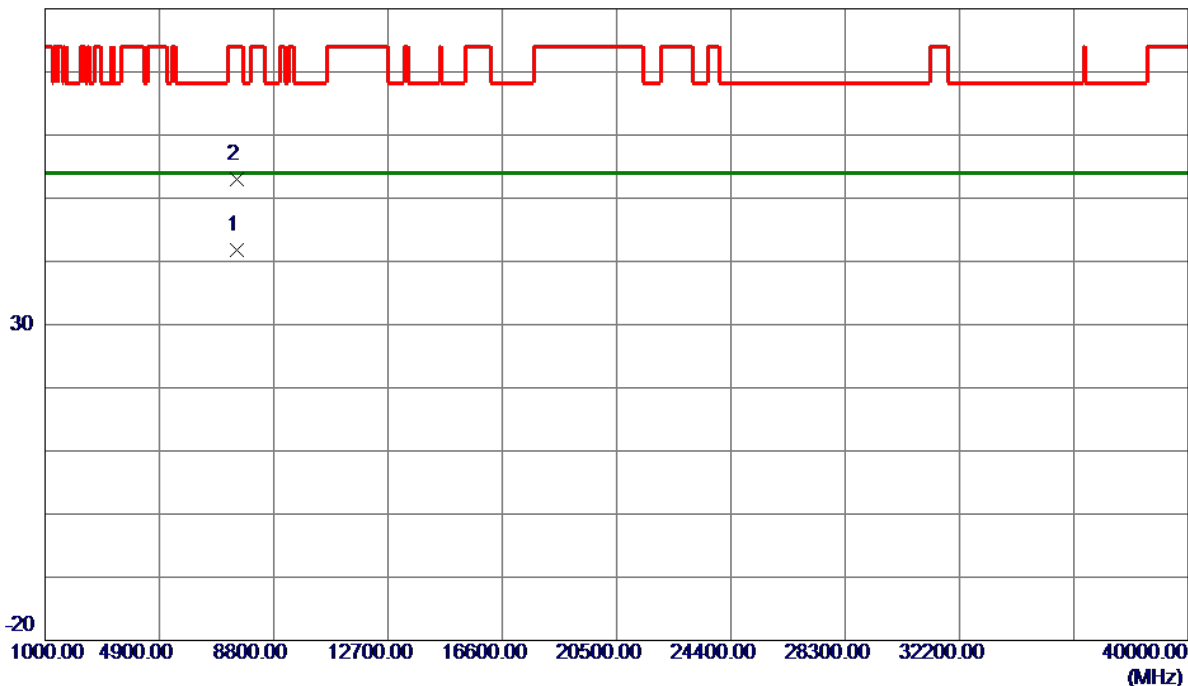


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7559.9850    | 31.27                      | 10.60                   | 41.87                     | 54.00           | -12.13       | AVG      |         |
| 2   | 7560.3500    | 42.46                      | 10.60                   | 53.06                     | 74.00           | -20.94       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

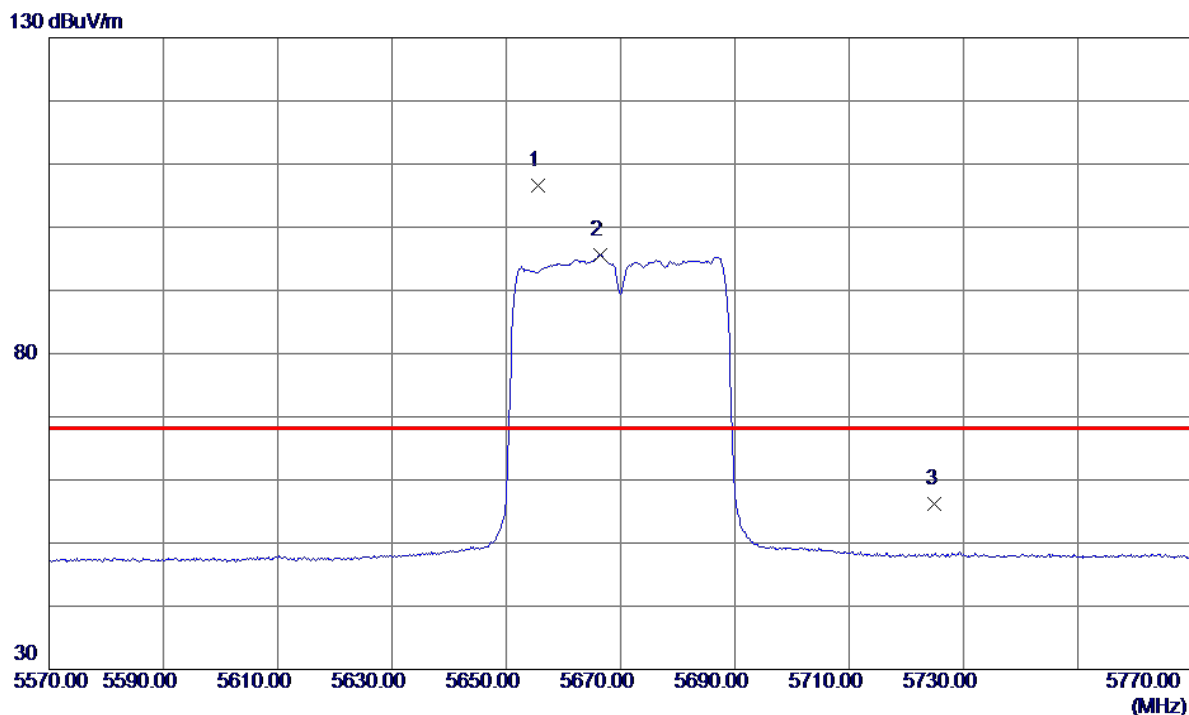


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5655.6000    | 90.18                      | 16.37                   | 106.55                    | 68.20           | 38.35        | Peak     | No Limit |
| 2   | 5666.4000    | 79.29                      | 16.40                   | 95.69                     | 999.00          | -903.31      | AVG      | No Limit |
| 3   | 5725.0000    | 39.66                      | 16.51                   | 56.17                     | 68.20           | -12.03       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

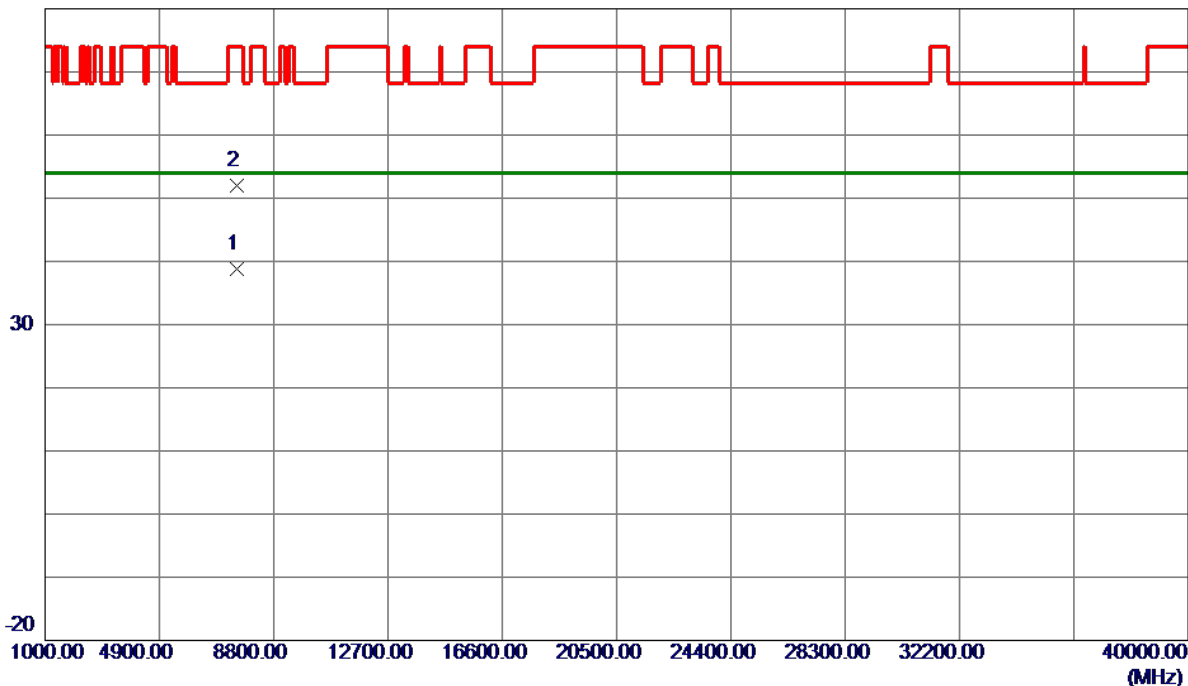


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7559.8040    | 28.21                      | 10.60                   | 38.81                     | 54.00           | -15.19       | AVG      |         |
| 2   | 7560.0620    | 41.42                      | 10.60                   | 52.02                     | 74.00           | -21.98       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

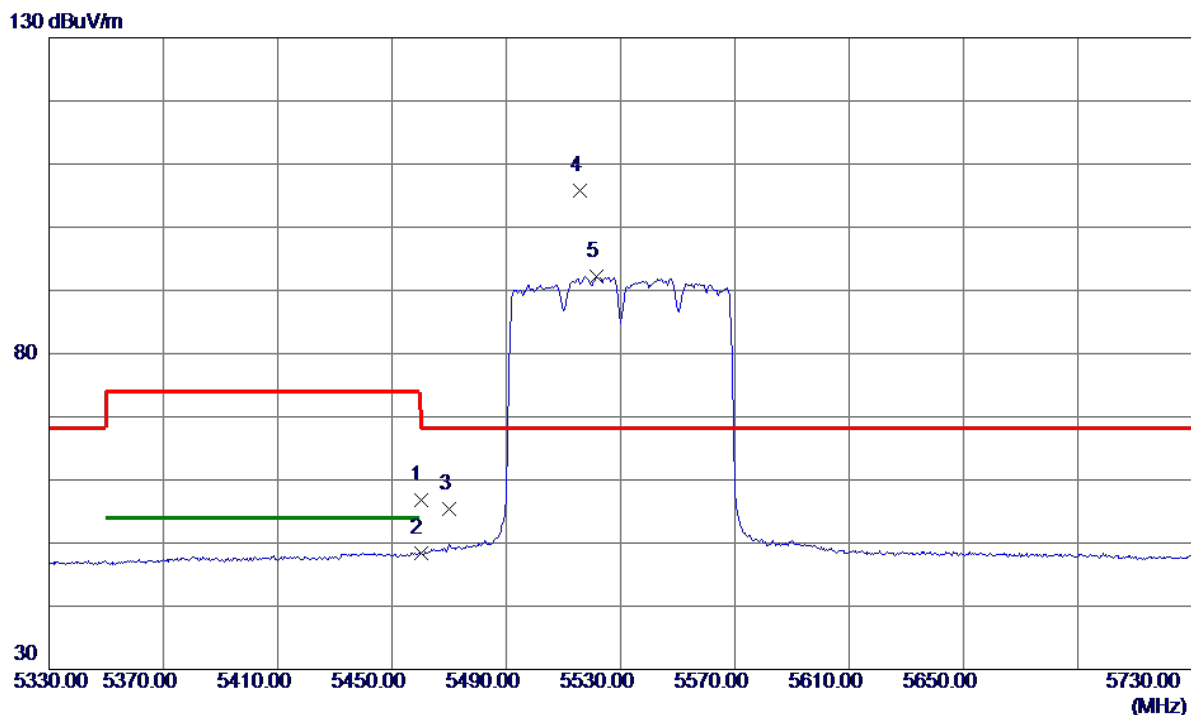


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.89                      | 15.97                   | 56.86                     | 74.00           | -17.14       | Peak     |          |
| 2   | 5460.0000    | 32.42                      | 15.97                   | 48.39                     | 54.00           | -5.61        | AVG      |          |
| 3   | 5470.0000    | 39.35                      | 16.00                   | 55.35                     | 68.20           | -12.85       | Peak     |          |
| 4 * | 5515.6000    | 89.78                      | 16.10                   | 105.88                    | 68.20           | 37.68        | Peak     | No Limit |
| 5   | 5521.6000    | 76.05                      | 16.11                   | 92.16                     | 999.00          | -906.84      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

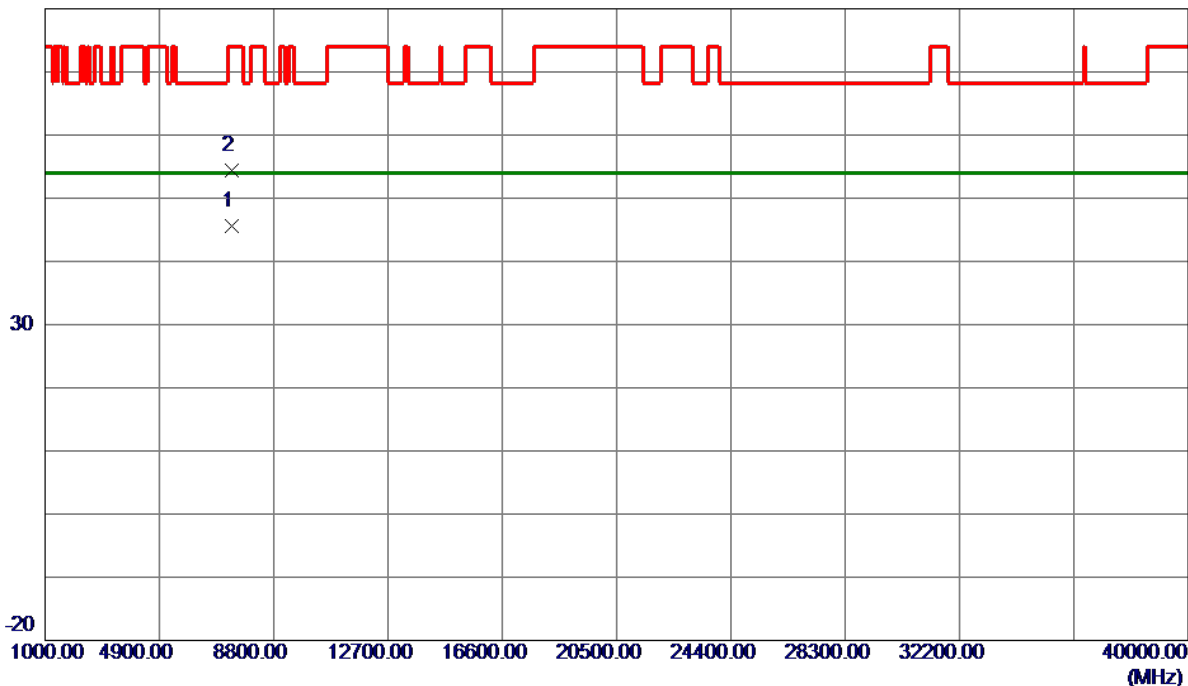


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7373.3700    | 35.24                      | 10.42                   | 45.66                     | 54.00           | -8.34        | AVG      |         |
| 2   | 7373.4950    | 44.00                      | 10.42                   | 54.42                     | 74.00           | -19.58       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

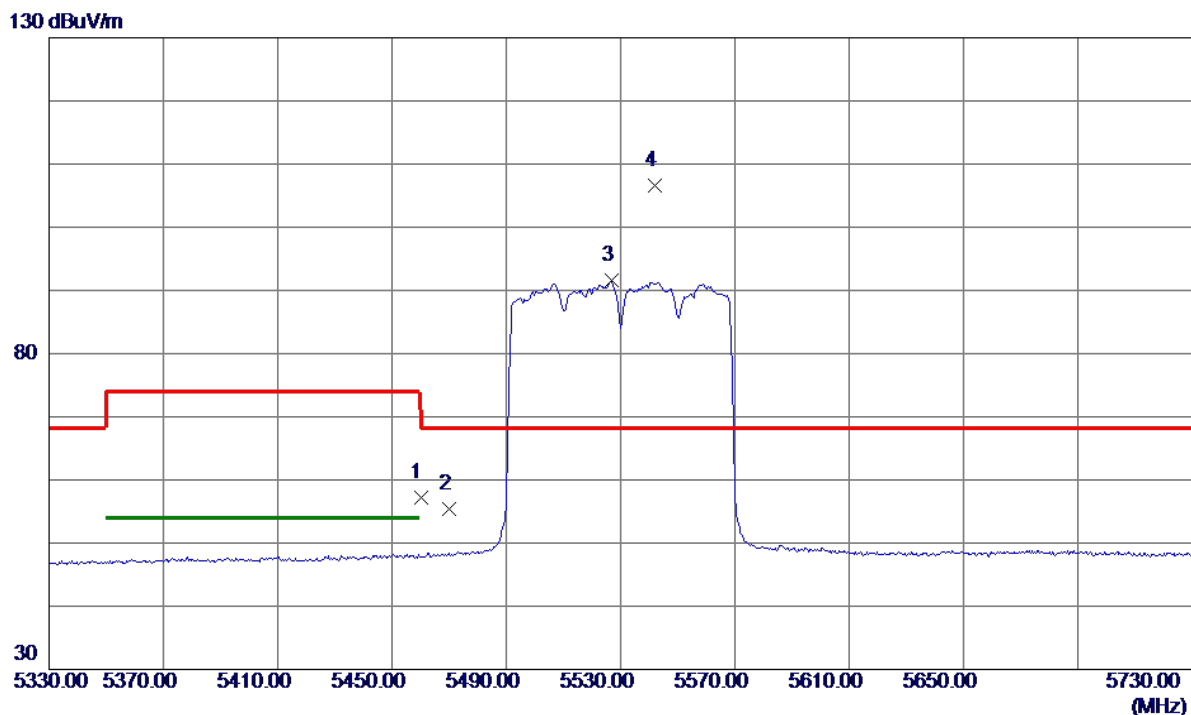


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 41.29                      | 15.97                   | 57.26                     | 74.00           | -16.74       | Peak     |          |
| 2   | 5470.0000    | 39.37                      | 16.00                   | 55.37                     | 68.20           | -12.83       | Peak     |          |
| 3   | 5526.8000    | 75.49                      | 16.12                   | 91.61                     | 999.00          | -907.39      | AVG      | No Limit |
| 4 * | 5542.0000    | 90.36                      | 16.15                   | 106.51                    | 68.20           | 38.31        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

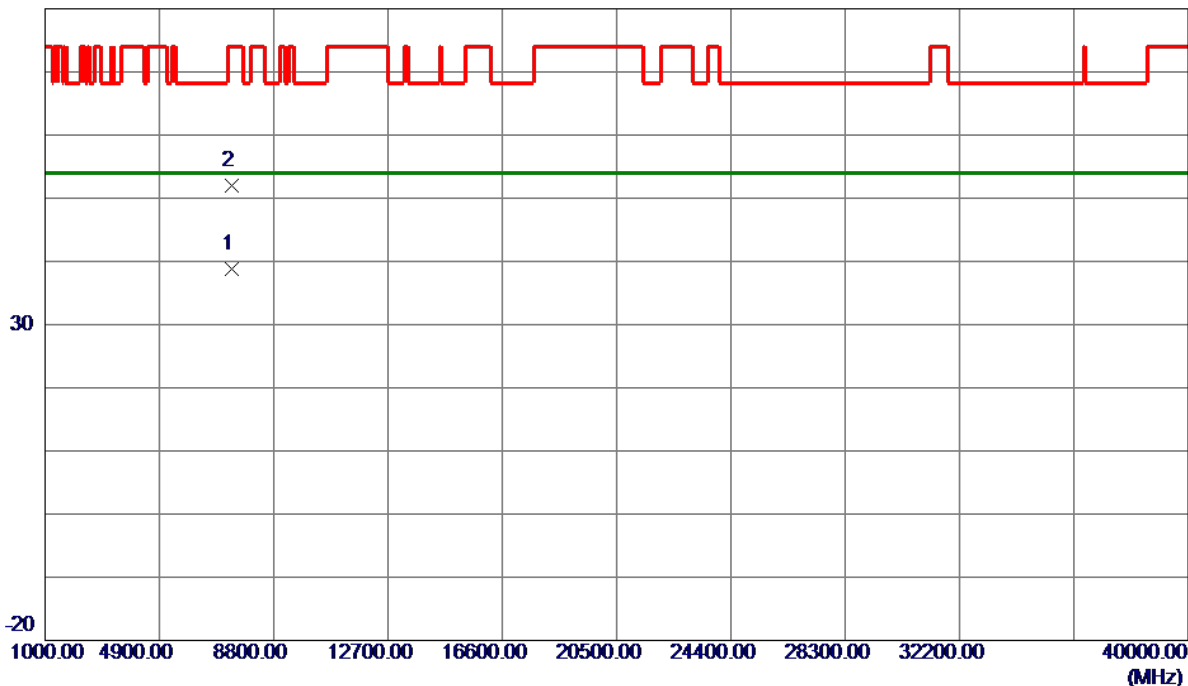


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7372.0080    | 28.30                      | 10.42                   | 38.72                     | 54.00           | -15.28       | AVG      |         |
| 2   | 7372.3180    | 41.65                      | 10.42                   | 52.07                     | 74.00           | -21.93       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

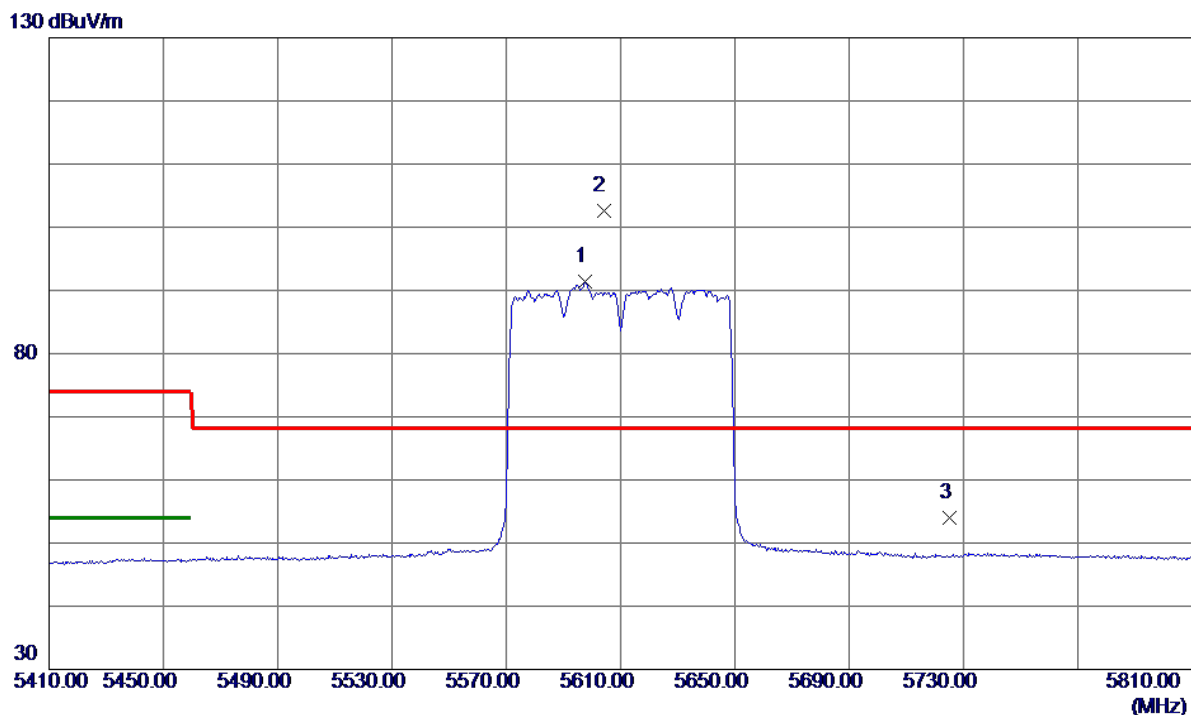


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5597.6000    | 75.15                      | 16.26                   | 91.41                     | 999.00          | -907.59      | AVG      | No Limit |
| 2 * | 5604.0000    | 86.41                      | 16.27                   | 102.68                    | 68.20           | 34.48        | Peak     | No Limit |
| 3   | 5725.0000    | 37.53                      | 16.51                   | 54.04                     | 68.20           | -14.16       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

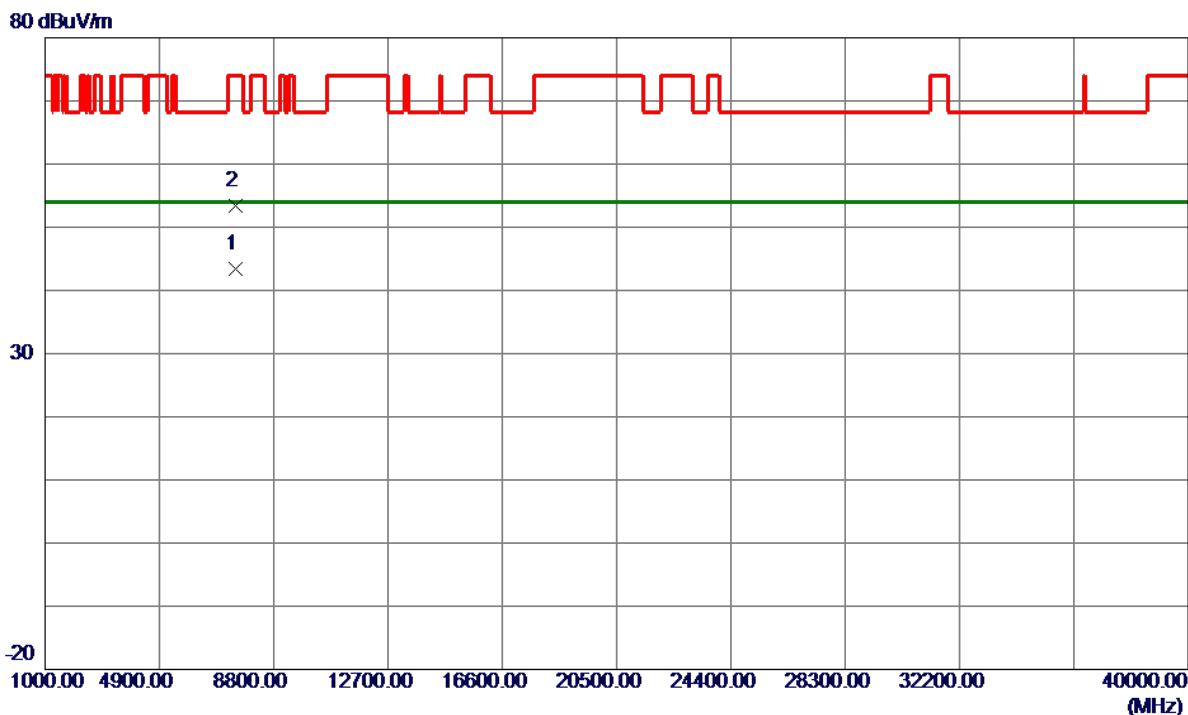


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7479.9450    | 32.87                      | 10.61                   | 43.48                     | 54.00           | -10.52       | AVG      |         |
| 2   | 7480.0450    | 42.73                      | 10.61                   | 53.34                     | 74.00           | -20.66       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

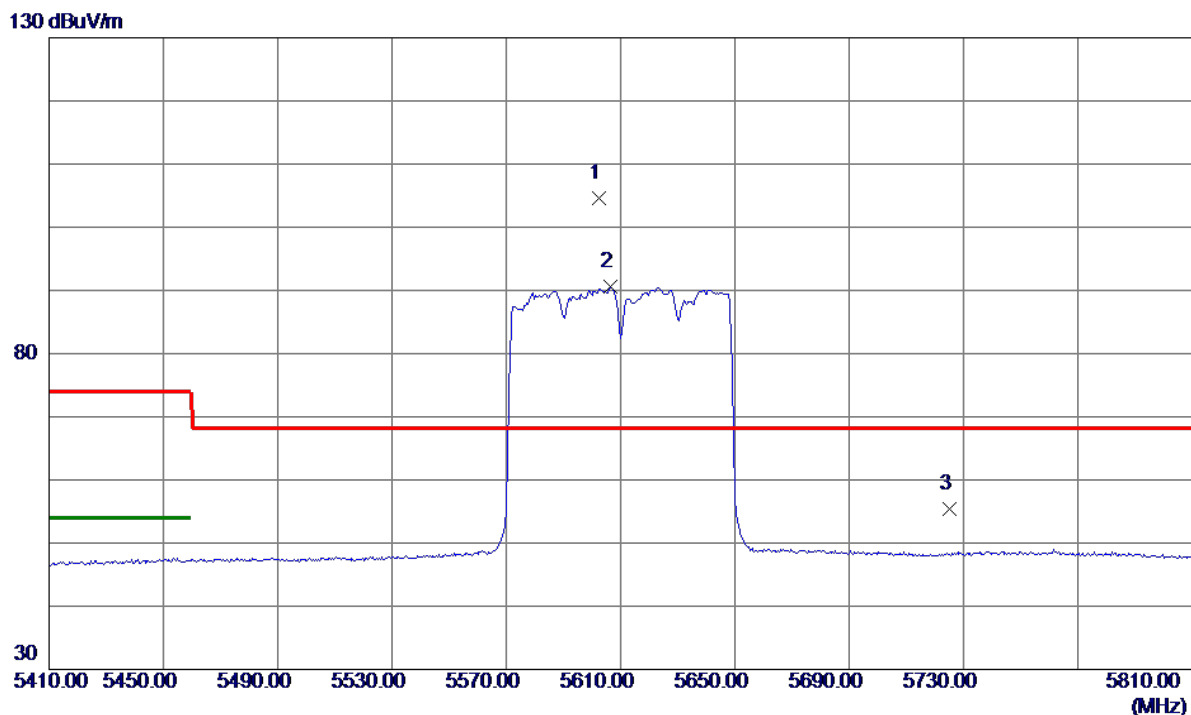


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5602.4000    | 88.29                      | 16.27                   | 104.56                    | 68.20           | 36.36        | Peak     | No Limit |
| 2   | 5606.4000    | 74.23                      | 16.28                   | 90.51                     | 999.00          | -908.49      | AVG      | No Limit |
| 3   | 5725.0000    | 38.91                      | 16.51                   | 55.42                     | 68.20           | -12.78       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

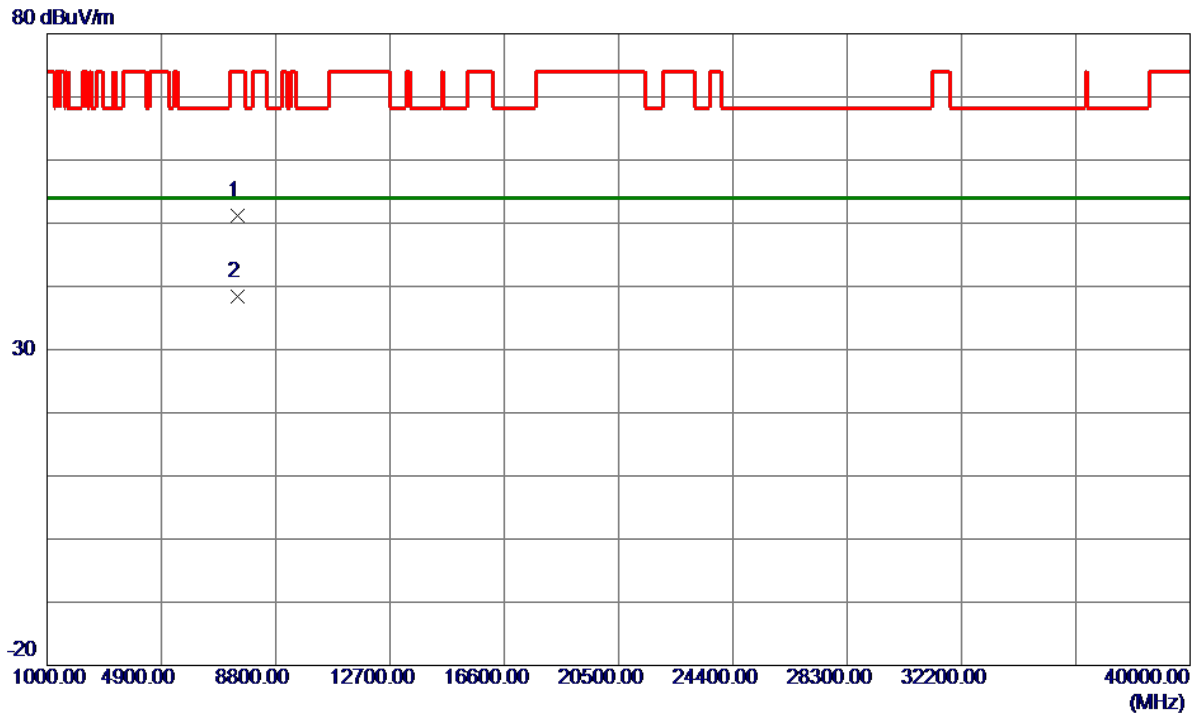


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7480.3780    | 40.60                      | 10.61                   | 51.21                     | 74.00           | -22.79       | Peak     |         |
| 2 * | 7480.6500    | 27.71                      | 10.61                   | 38.32                     | 54.00           | -15.68       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |          |
|-----------|-------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Vertical |
|-----------|-------------------------------------|--------------|----------|

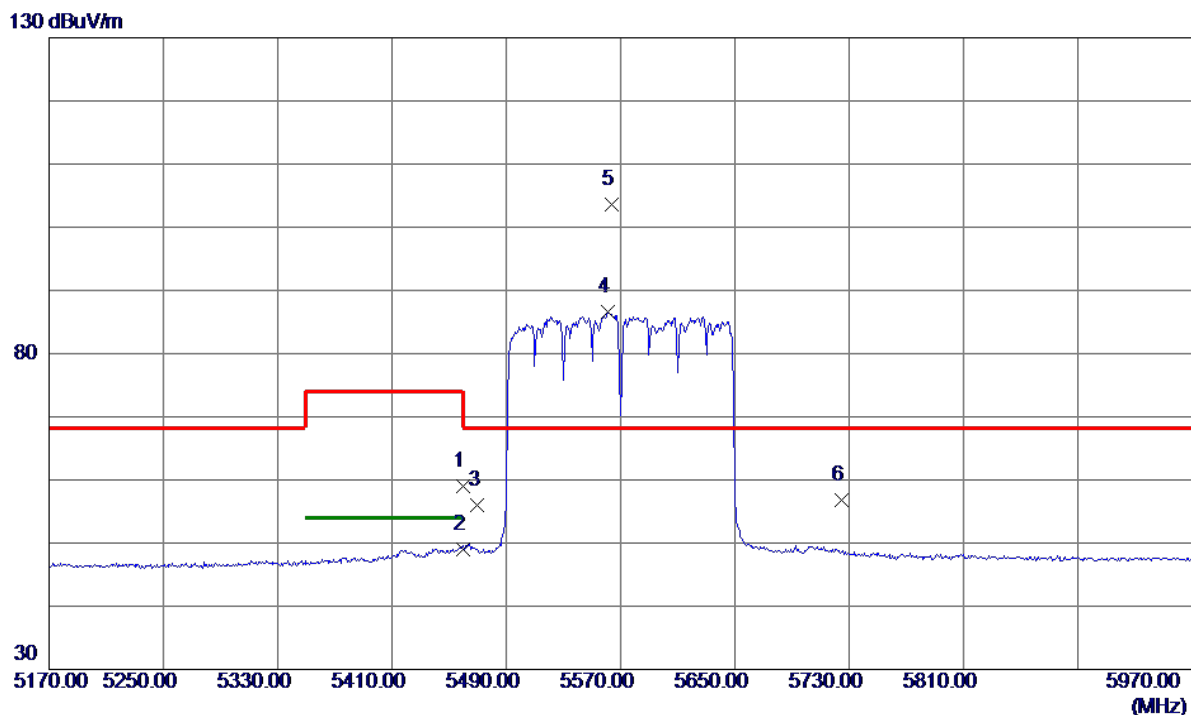


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 43.09                      | 15.97                   | 59.06                     | 74.00           | -14.94       | Peak     |          |
| 2   | 5460.0000    | 33.11                      | 15.97                   | 49.08                     | 54.00           | -4.92        | AVG      |          |
| 3   | 5470.0000    | 40.09                      | 16.00                   | 56.09                     | 68.20           | -12.11       | Peak     |          |
| 4   | 5561.2000    | 70.34                      | 16.19                   | 86.53                     | 999.00          | -912.47      | AVG      | No Limit |
| 5 * | 5563.6000    | 87.36                      | 16.19                   | 103.55                    | 68.20           | 35.35        | Peak     | No Limit |
| 6   | 5725.0000    | 40.25                      | 16.51                   | 56.76                     | 68.20           | -11.44       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |          |
|-----------|-------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Vertical |
|-----------|-------------------------------------|--------------|----------|

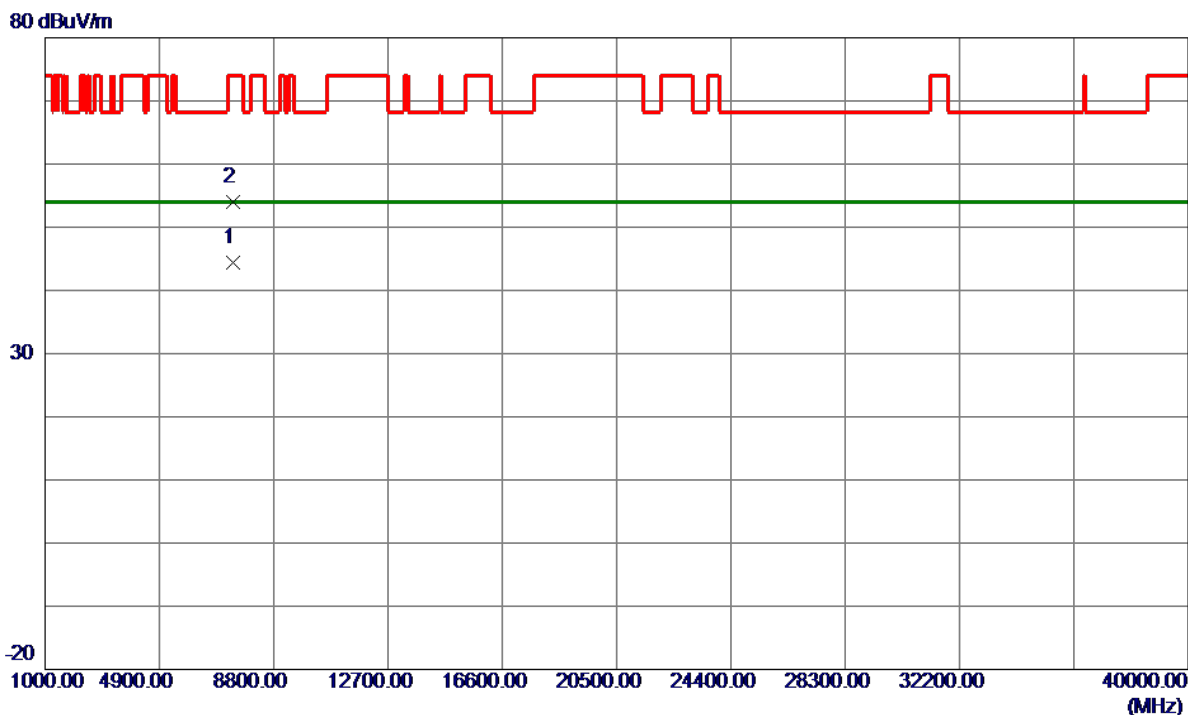


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7426.6400    | 33.81                      | 10.52                   | 44.33                     | 54.00           | -9.67        | AVG      |         |
| 2   | 7426.6800    | 43.56                      | 10.52                   | 54.08                     | 74.00           | -19.92       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |            |
|-----------|-------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|-------------------------------------|--------------|------------|

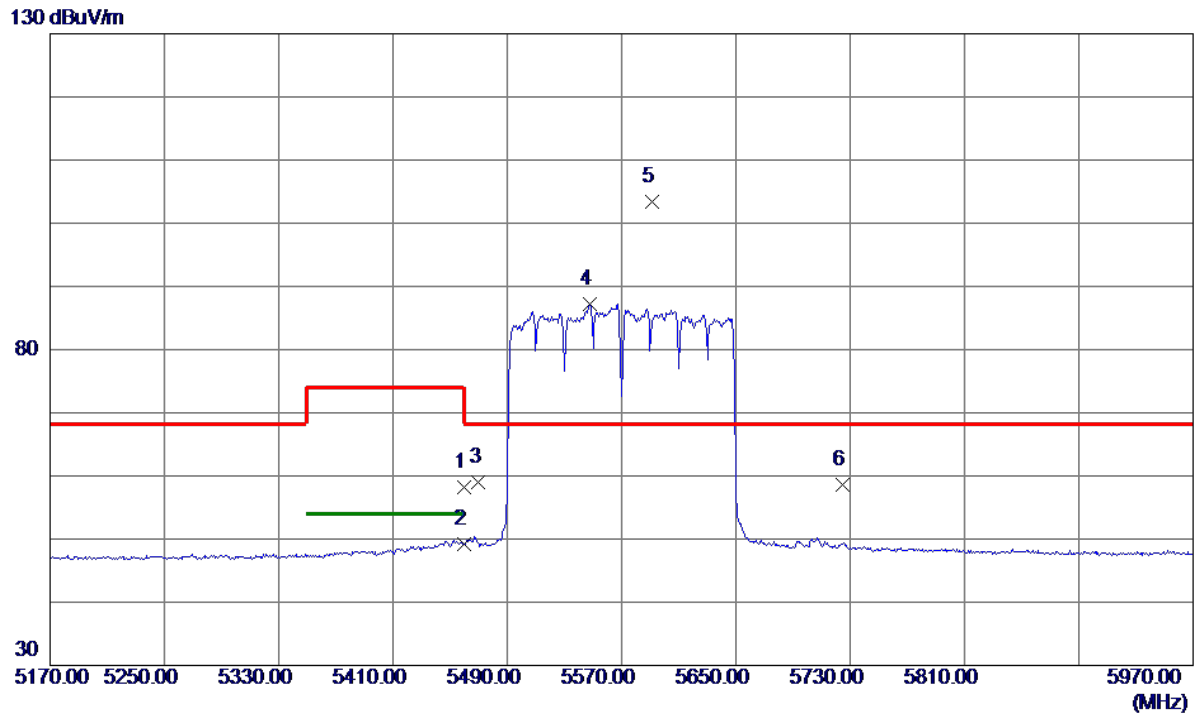


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 42.14                      | 15.97                   | 58.11                     | 74.00           | -15.89       | Peak     |          |
| 2   | 5460.0000    | 33.32                      | 15.97                   | 49.29                     | 54.00           | -4.71        | AVG      |          |
| 3   | 5470.0000    | 43.03                      | 16.00                   | 59.03                     | 68.20           | -9.17        | Peak     |          |
| 4   | 5547.6000    | 71.04                      | 16.16                   | 87.20                     | 999.00          | -911.80      | AVG      | No Limit |
| 5 * | 5591.6000    | 87.12                      | 16.25                   | 103.37                    | 68.20           | 35.17        | Peak     | No Limit |
| 6   | 5725.0000    | 42.03                      | 16.51                   | 58.54                     | 68.20           | -9.66        | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |            |
|-----------|-------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|-------------------------------------|--------------|------------|

80 dBuV/m

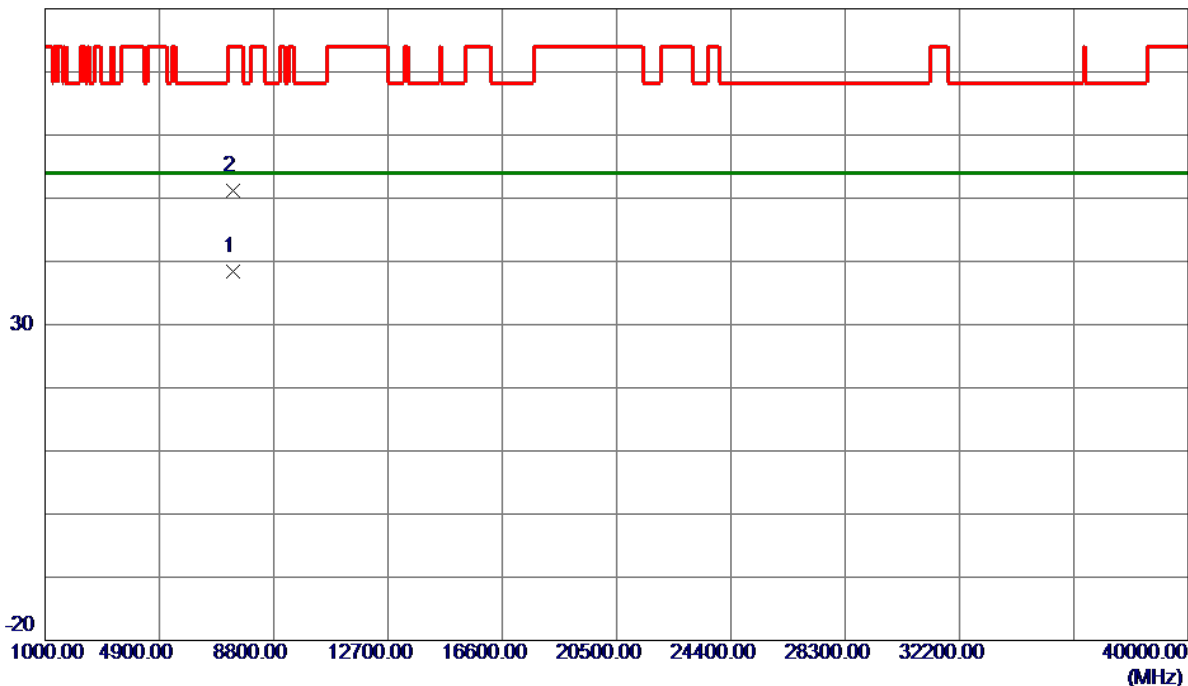


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7426.0360    | 27.84                      | 10.51                   | 38.35                     | 54.00           | -15.65       | AVG      |         |
| 2   | 7426.5080    | 40.61                      | 10.52                   | 51.13                     | 74.00           | -22.87       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

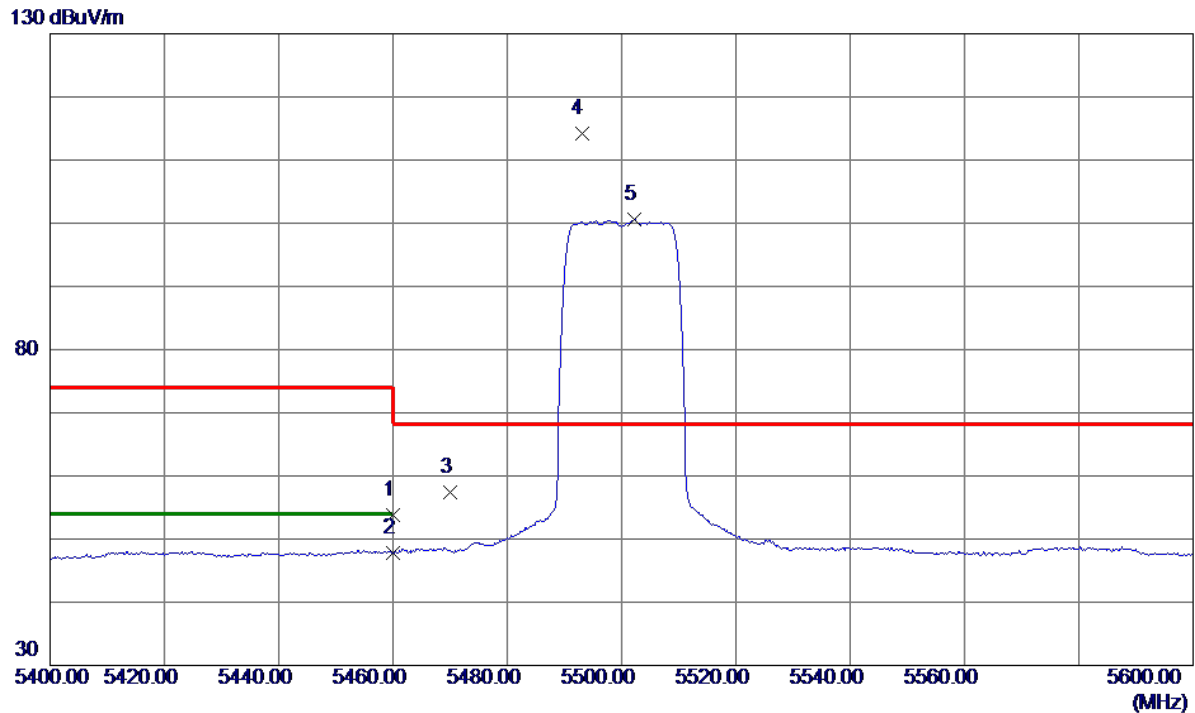


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 37.80                      | 15.97                   | 53.77                     | 74.00           | -20.23       | Peak     |          |
| 2   | 5460.0000    | 31.90                      | 15.97                   | 47.87                     | 54.00           | -6.13        | AVG      |          |
| 3   | 5470.0000    | 41.38                      | 16.00                   | 57.38                     | 68.20           | -10.82       | Peak     |          |
| 4 * | 5493.0000    | 98.17                      | 16.05                   | 114.22                    | 68.20           | 46.02        | Peak     | No Limit |
| 5   | 5502.2000    | 84.47                      | 16.07                   | 100.54                    | 999.00          | -898.46      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

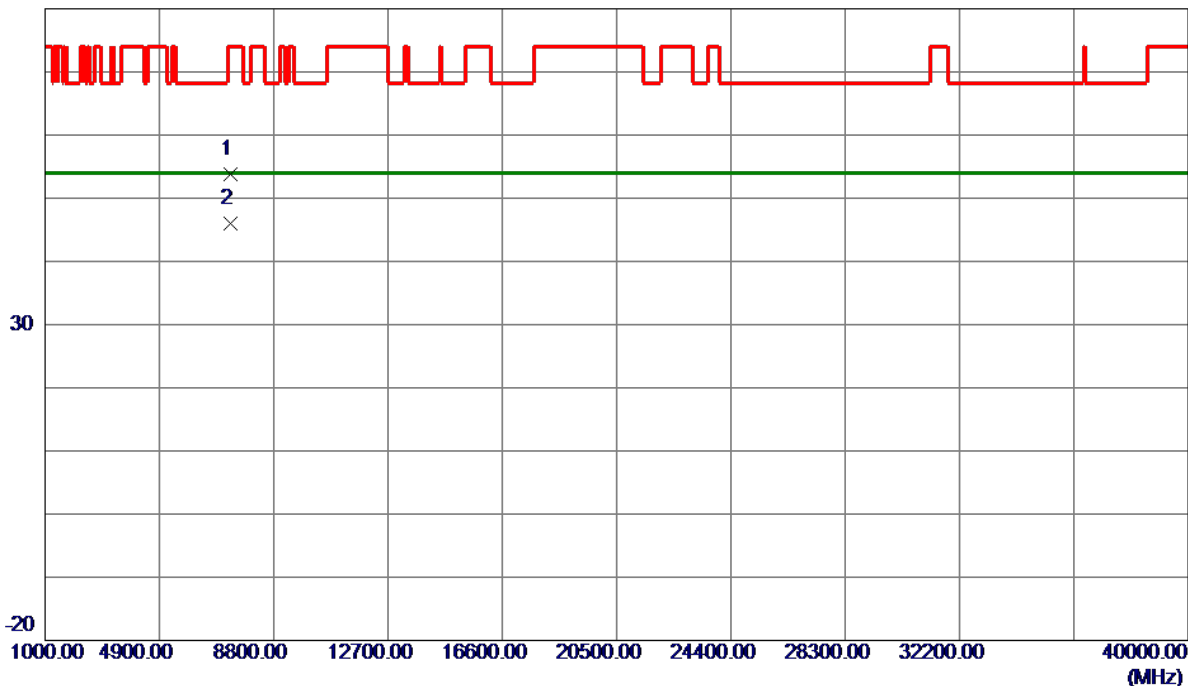


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7333.2500    | 43.49                      | 10.36                   | 53.85                     | 74.00           | -20.15       | Peak     |         |
| 2 * | 7333.3050    | 35.65                      | 10.36                   | 46.01                     | 54.00           | -7.99        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

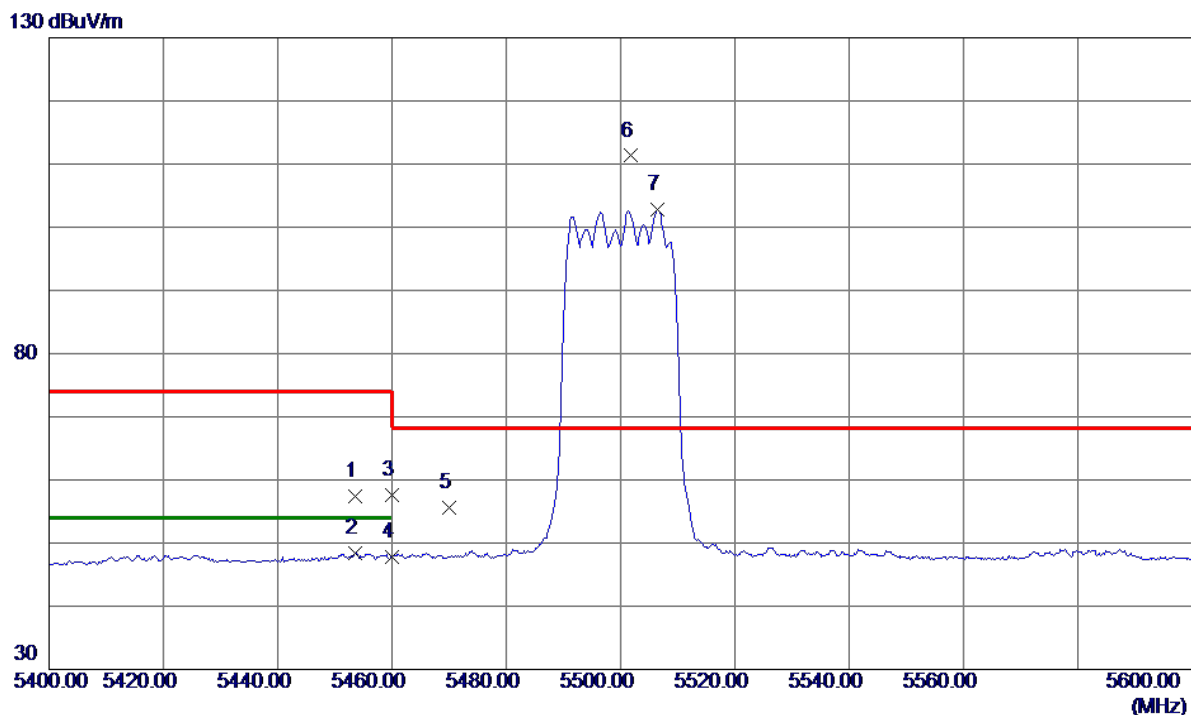


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5453.6000    | 41.52                      | 15.96                   | 57.48                     | 74.00           | -16.52       | Peak     |          |
| 2   | 5453.6000    | 32.40                      | 15.96                   | 48.36                     | 54.00           | -5.64        | AVG      |          |
| 3   | 5460.0000    | 41.62                      | 15.97                   | 57.59                     | 74.00           | -16.41       | Peak     |          |
| 4   | 5460.0000    | 31.84                      | 15.97                   | 47.81                     | 54.00           | -6.19        | AVG      |          |
| 5   | 5470.0000    | 39.56                      | 16.00                   | 55.56                     | 68.20           | -12.64       | Peak     |          |
| 6 * | 5501.8000    | 95.23                      | 16.07                   | 111.30                    | 68.20           | 43.10        | Peak     | No Limit |
| 7   | 5506.4000    | 86.69                      | 16.08                   | 102.77                    | 999.00          | -896.23      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

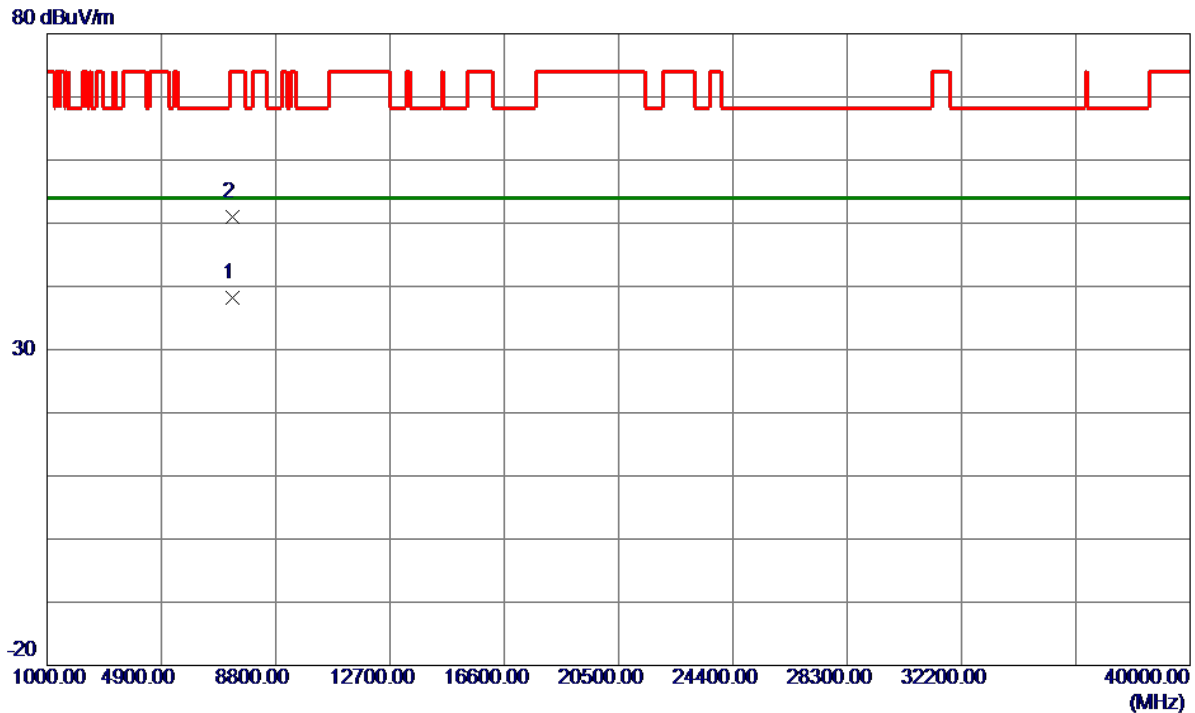


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7332.1060    | 27.92                      | 10.35                   | 38.27                     | 54.00           | -15.73       | AVG      |         |
| 2   | 7333.0100    | 40.64                      | 10.36                   | 51.00                     | 74.00           | -23.00       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

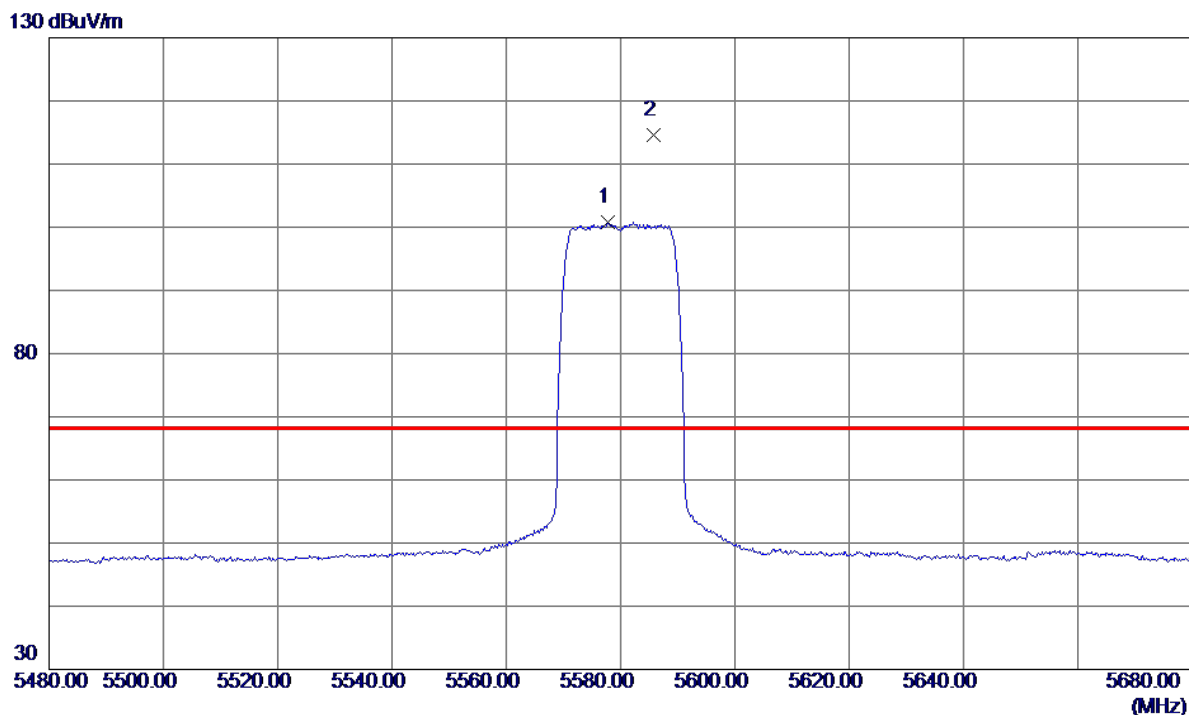


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5577.8000    | 84.60                      | 16.22                   | 100.82                    | 999.00          | -898.18      | AVG      | No Limit |
| 2 * | 5585.8000    | 98.27                      | 16.24                   | 114.51                    | 68.20           | 46.31        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

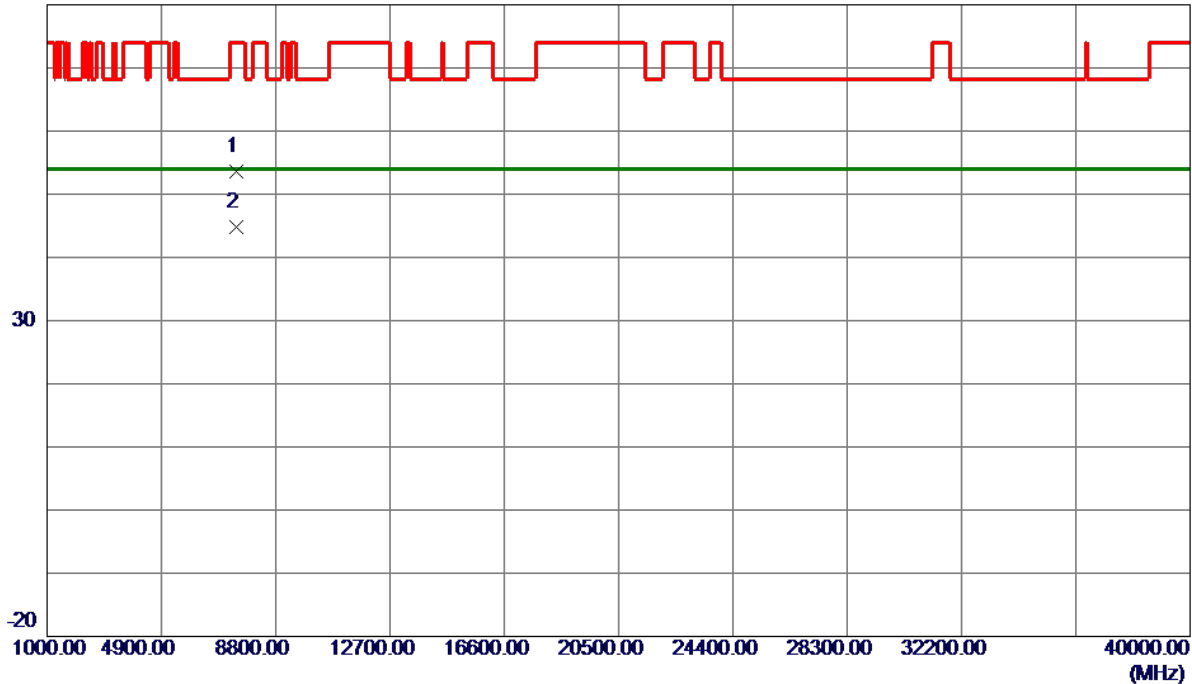


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7439.9400    | 43.08                      | 10.54                   | 53.62                     | 74.00           | -20.38       | Peak     |         |
| 2 * | 7439.9900    | 34.33                      | 10.54                   | 44.87                     | 54.00           | -9.13        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

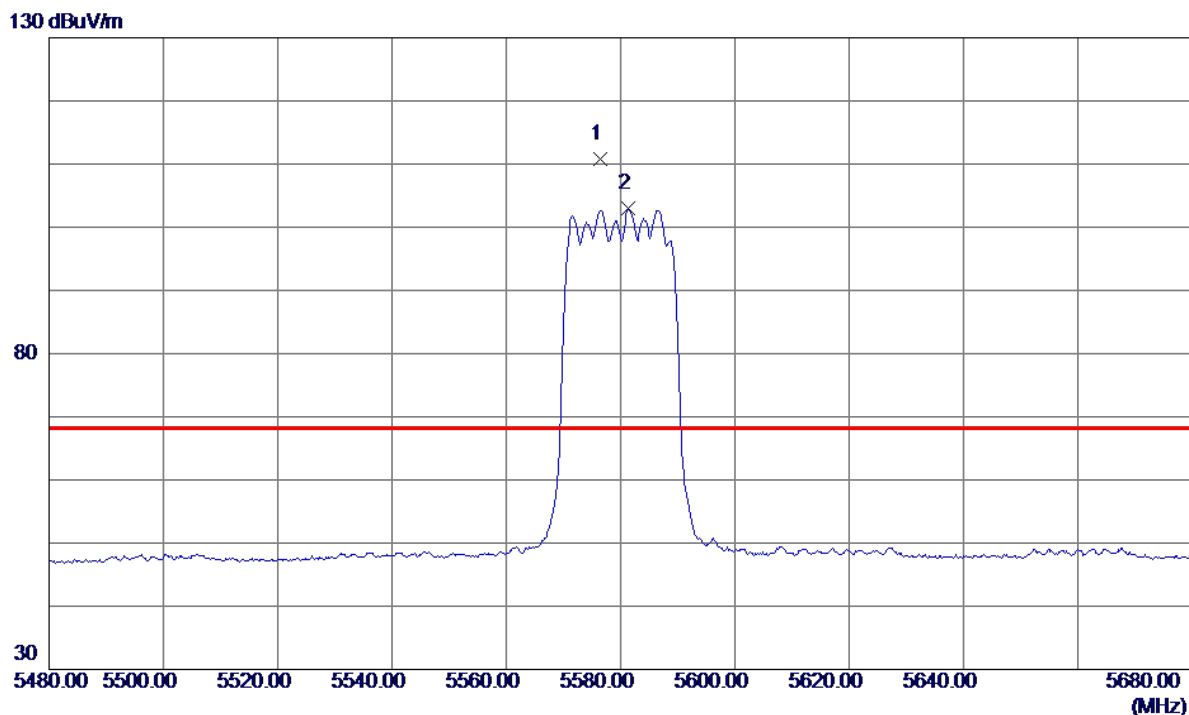


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5576.4000    | 94.51                      | 16.22                   | 110.73                    | 68.20           | 42.53        | Peak     | No Limit |
| 2   | 5581.4000    | 86.71                      | 16.23                   | 102.94                    | 999.00          | -896.06      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

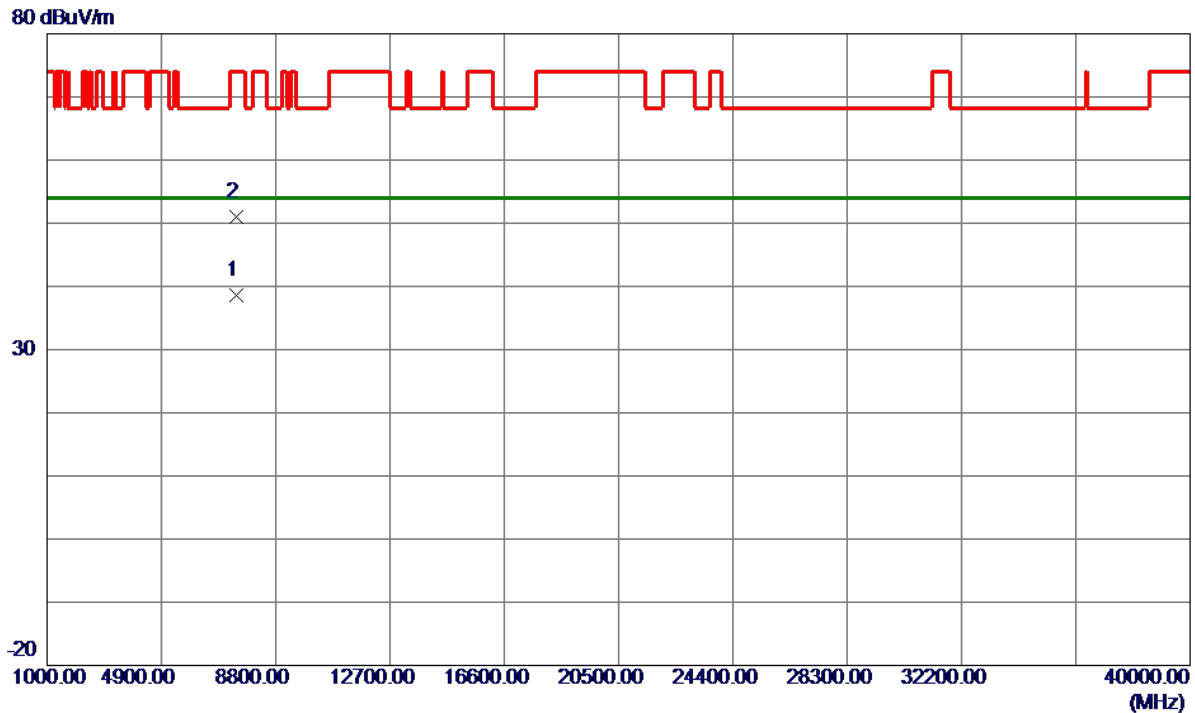


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7439.1020    | 27.99                      | 10.54                   | 38.53                     | 54.00           | -15.47       | AVG      |         |
| 2   | 7440.9760    | 40.52                      | 10.54                   | 51.06                     | 74.00           | -22.94       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

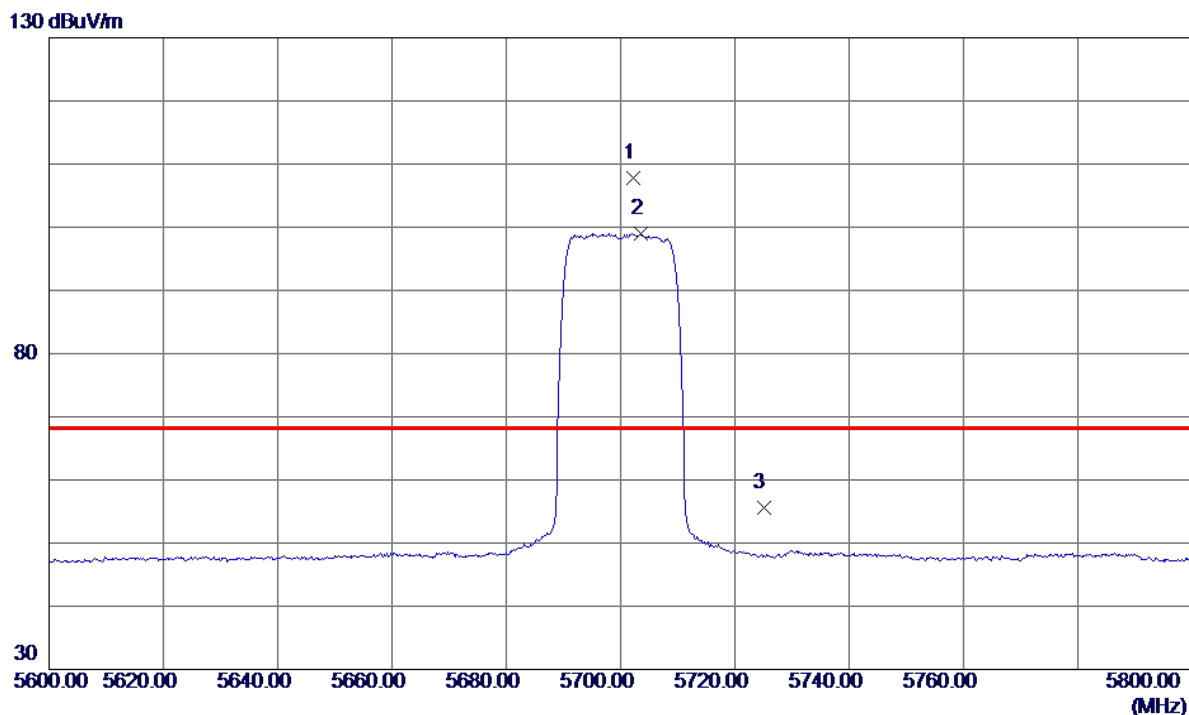


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5702.2000    | 91.30                      | 16.47                   | 107.77                    | 68.20           | 39.57        | Peak     | No Limit |
| 2   | 5703.6000    | 82.56                      | 16.47                   | 99.03                     | 999.00          | -899.97      | AVG      | No Limit |
| 3   | 5725.0000    | 39.13                      | 16.51                   | 55.64                     | 68.20           | -12.56       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

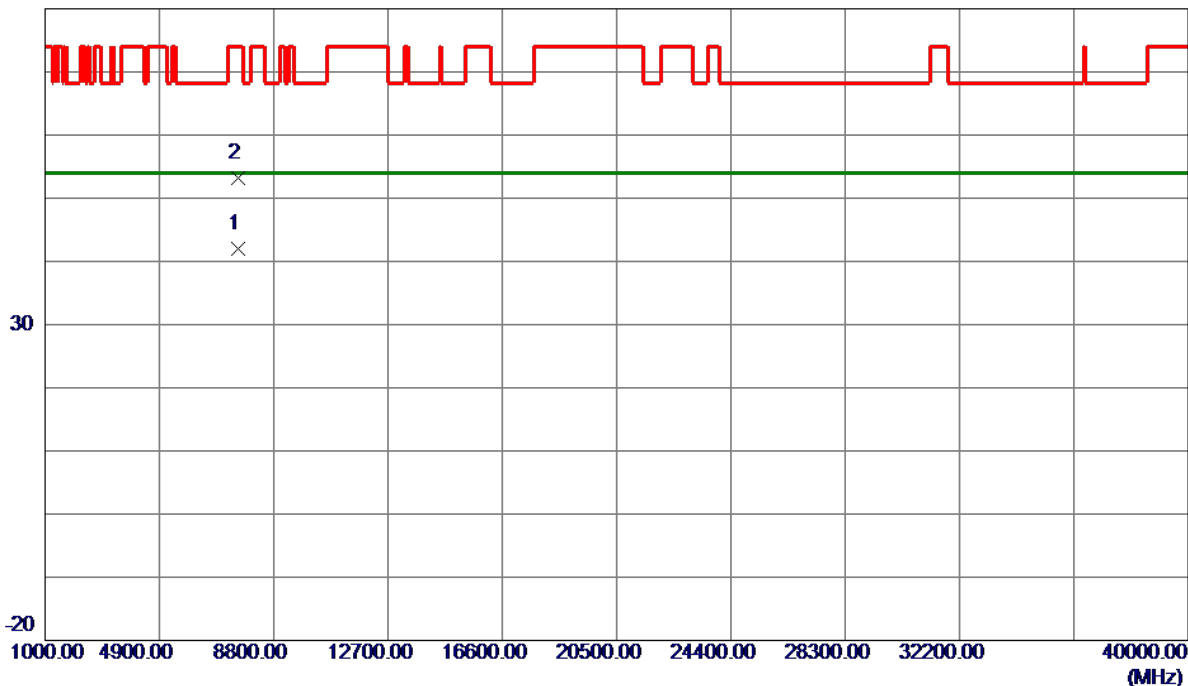


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7599.9650    | 31.34                      | 10.57                   | 41.91                     | 54.00           | -12.09       | AVG      |         |
| 2   | 7599.9750    | 42.65                      | 10.57                   | 53.22                     | 74.00           | -20.78       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

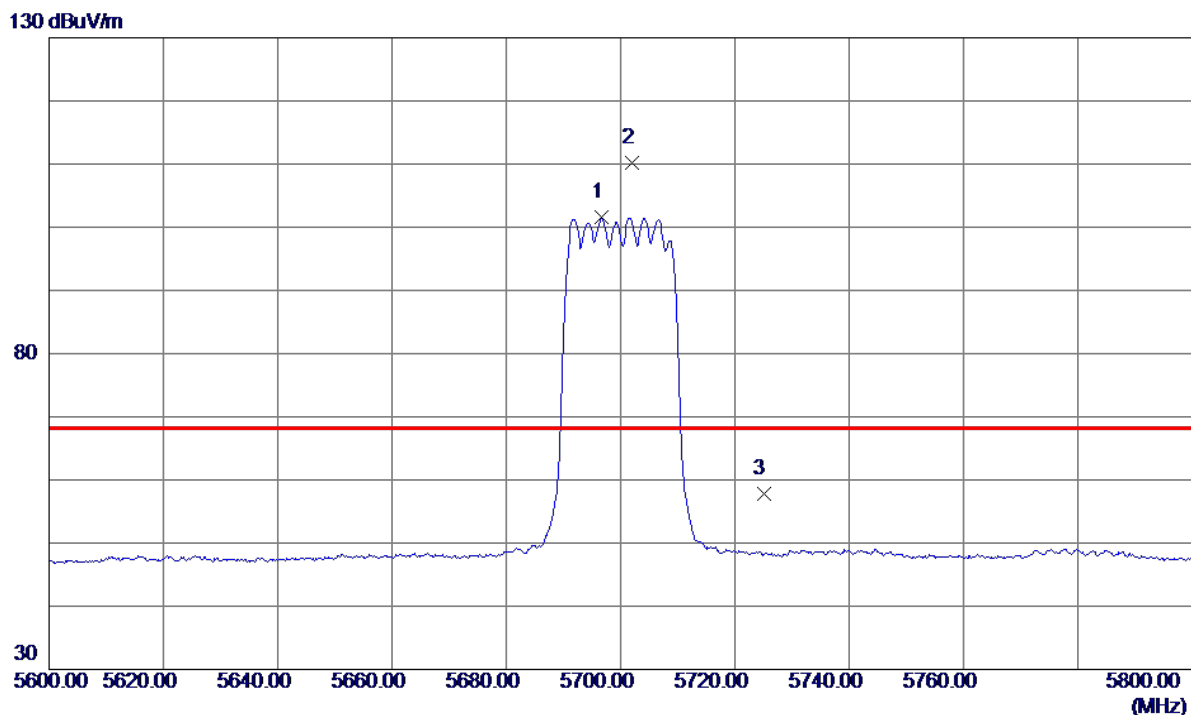


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5696.6000    | 85.10                      | 16.46                   | 101.56                    | 999.00          | -897.44      | AVG      | No Limit |
| 2 * | 5702.0000    | 93.70                      | 16.47                   | 110.17                    | 68.20           | 41.97        | Peak     | No Limit |
| 3   | 5725.0000    | 41.31                      | 16.51                   | 57.82                     | 68.20           | -10.38       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

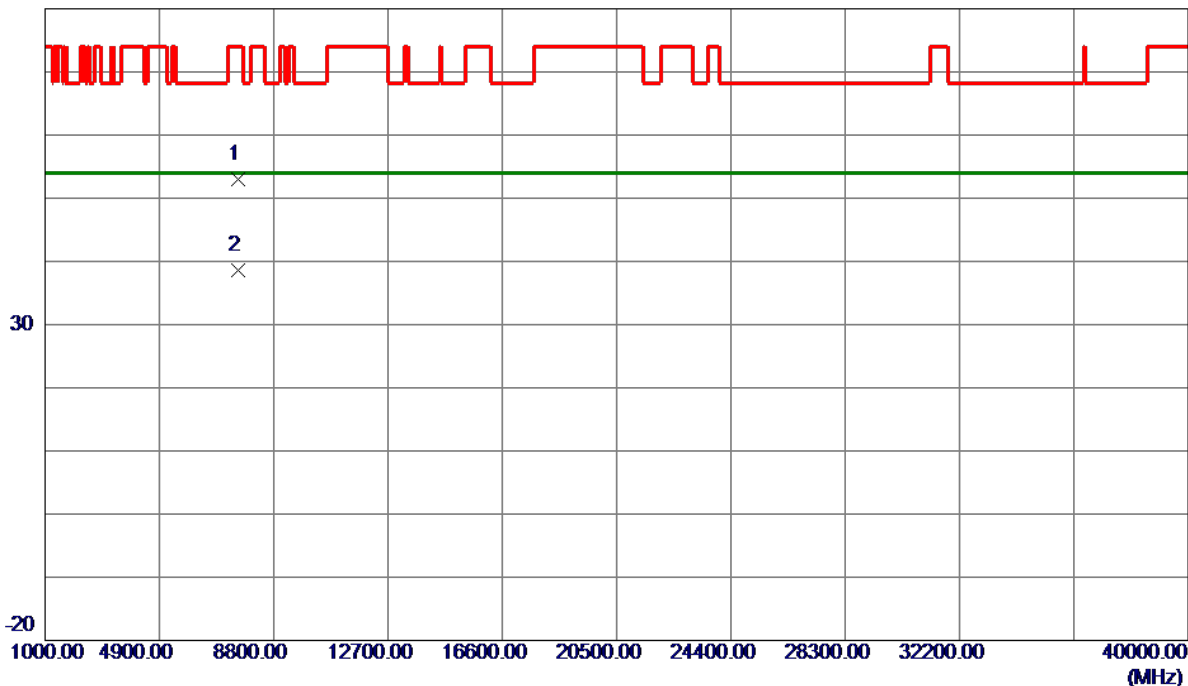


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7599.3420    | 42.41                      | 10.57                   | 52.98                     | 74.00           | -21.02       | Peak     |         |
| 2 * | 7599.4660    | 28.07                      | 10.57                   | 38.64                     | 54.00           | -15.36       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

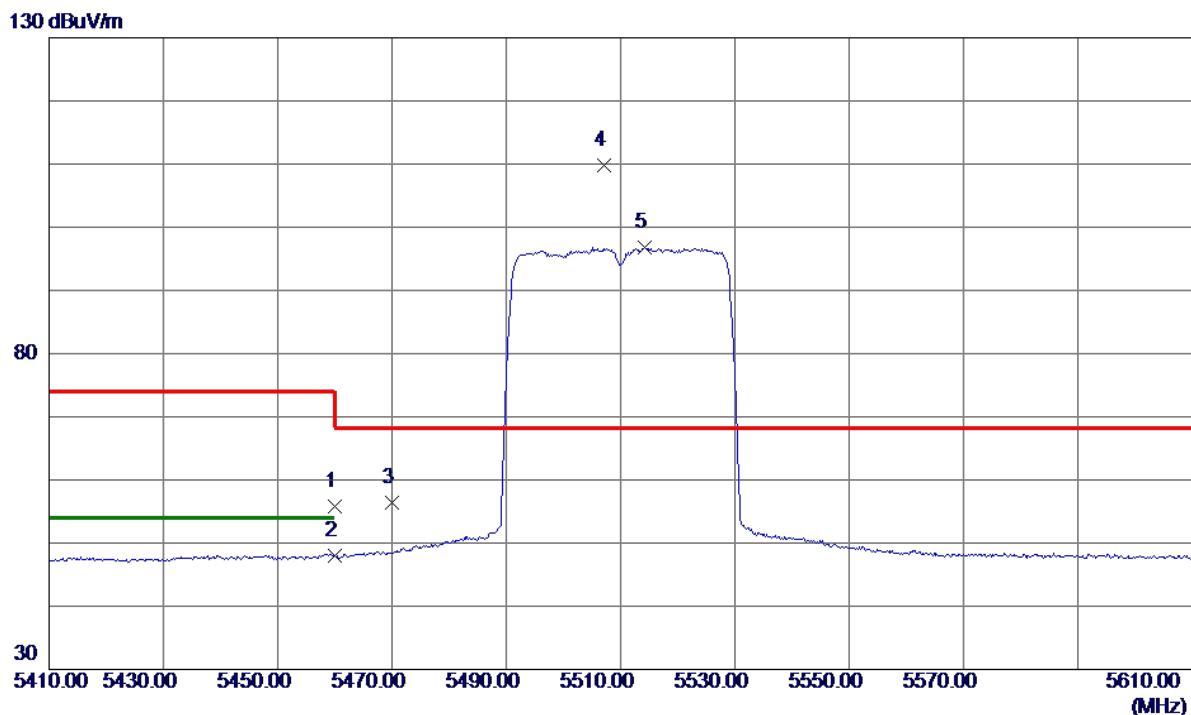


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.75                      | 15.97                   | 55.72                     | 74.00           | -18.28       | Peak     |          |
| 2   | 5460.0000    | 31.95                      | 15.97                   | 47.92                     | 54.00           | -6.08        | AVG      |          |
| 3   | 5470.0000    | 40.47                      | 16.00                   | 56.47                     | 68.20           | -11.73       | Peak     |          |
| 4 * | 5507.2000    | 93.75                      | 16.08                   | 109.83                    | 68.20           | 41.63        | Peak     | No Limit |
| 5   | 5514.2000    | 80.68                      | 16.09                   | 96.77                     | 999.00          | -902.23      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

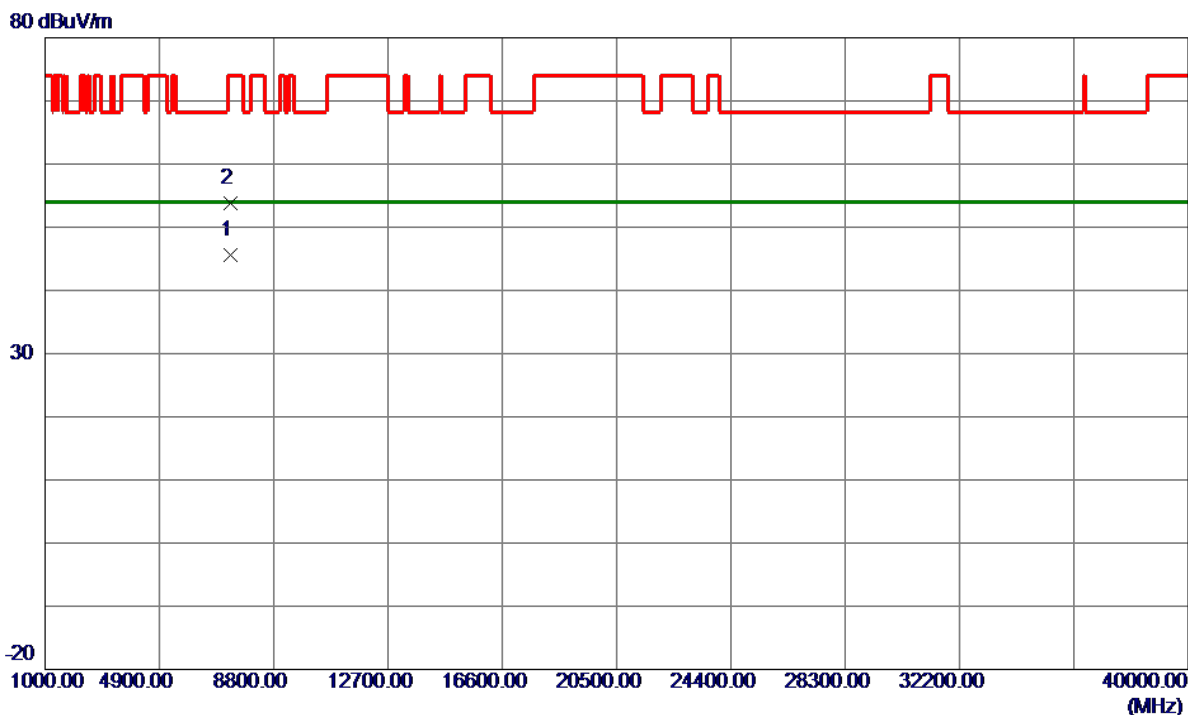


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7346.5650    | 35.16                      | 10.38                   | 45.54                     | 54.00           | -8.46        | AVG      |         |
| 2   | 7346.8500    | 43.46                      | 10.38                   | 53.84                     | 74.00           | -20.16       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

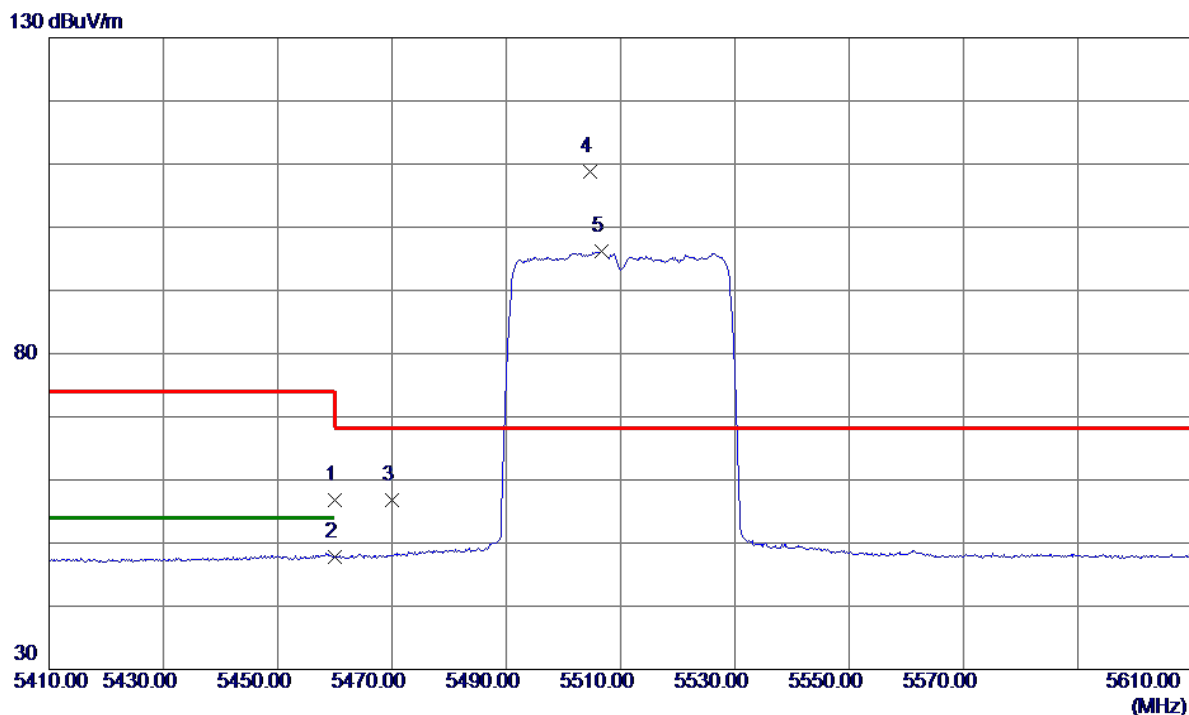


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.87                      | 15.97                   | 56.84                     | 74.00           | -17.16       | Peak     |          |
| 2   | 5460.0000    | 31.81                      | 15.97                   | 47.78                     | 54.00           | -6.22        | AVG      |          |
| 3   | 5470.0000    | 40.89                      | 16.00                   | 56.89                     | 68.20           | -11.31       | Peak     |          |
| 4 * | 5504.6000    | 92.77                      | 16.07                   | 108.84                    | 68.20           | 40.64        | Peak     | No Limit |
| 5   | 5506.6000    | 80.06                      | 16.08                   | 96.14                     | 999.00          | -902.86      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

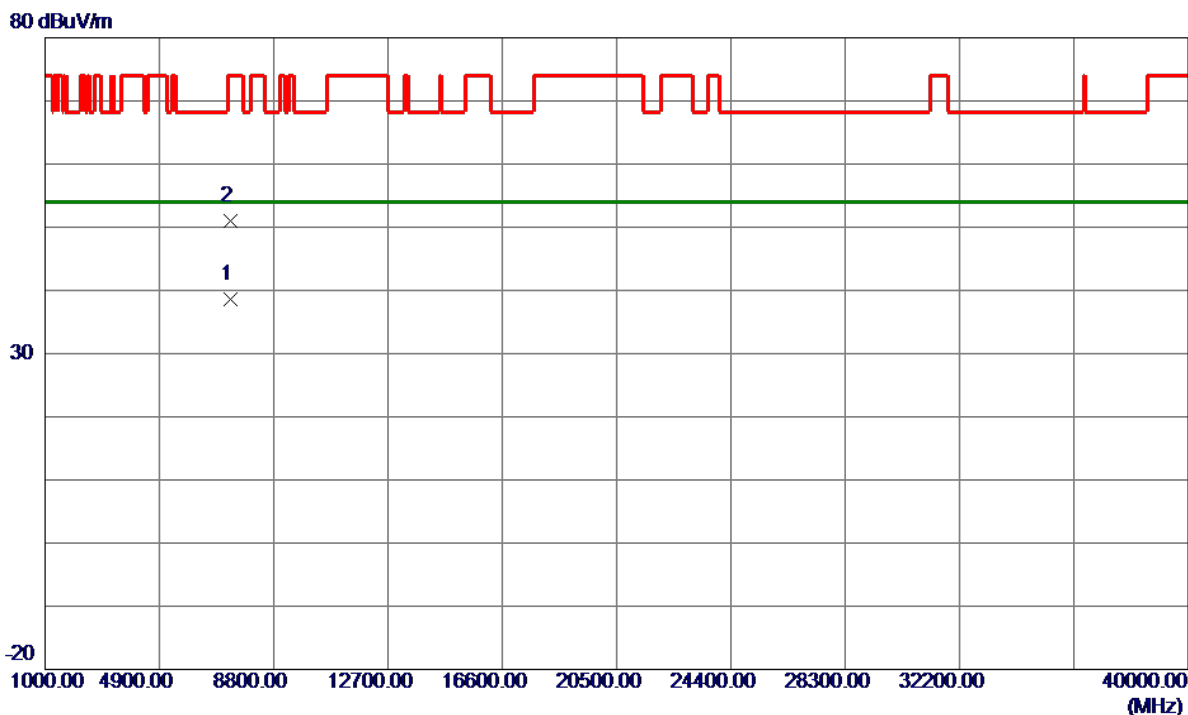


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7346.0060    | 28.28                      | 10.38                   | 38.66                     | 54.00           | -15.34       | AVG      |         |
| 2   | 7346.2380    | 40.71                      | 10.38                   | 51.09                     | 74.00           | -22.91       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

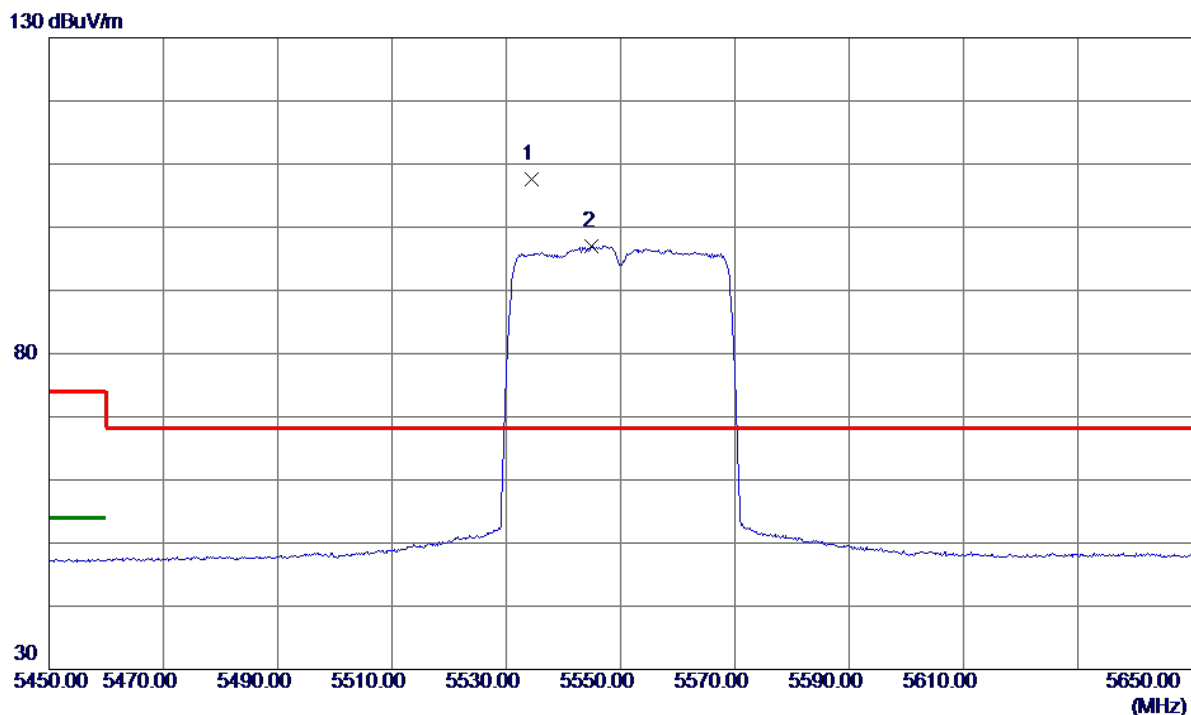


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5534.4000    | 91.45                      | 16.13                   | 107.58                    | 68.20           | 39.38        | Peak     | No Limit |
| 2   | 5545.0000    | 80.90                      | 16.15                   | 97.05                     | 999.00          | -901.95      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

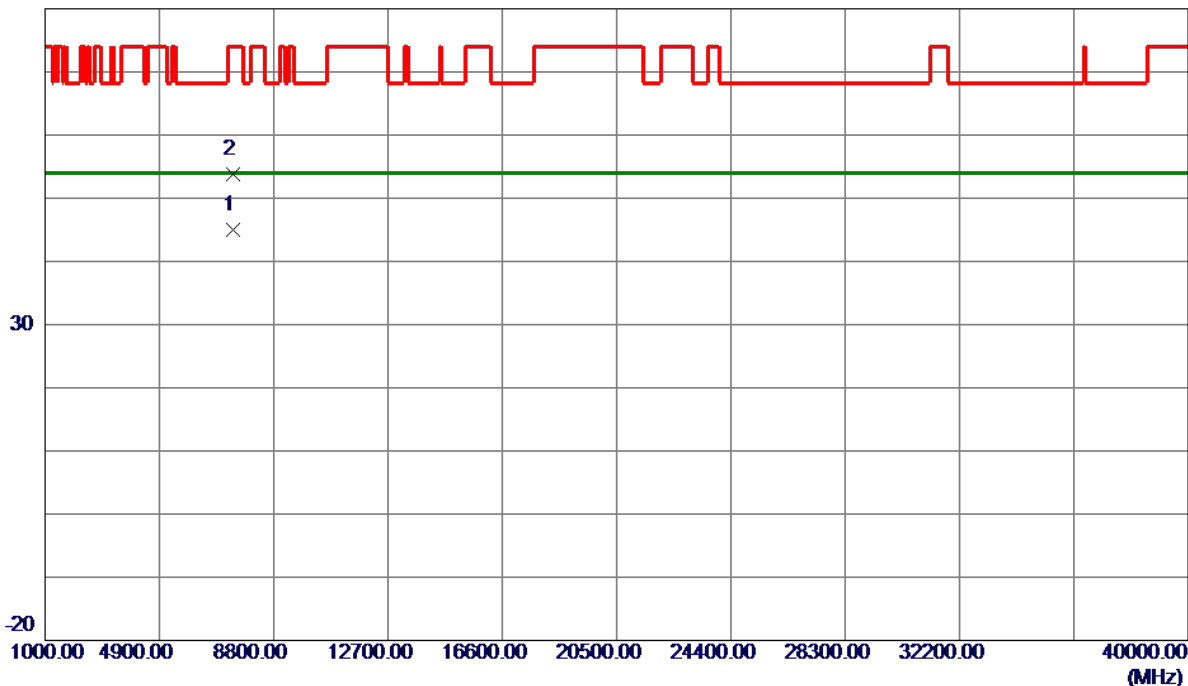


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7400.0300    | 34.54                      | 10.47                   | 45.01                     | 54.00           | -8.99        | AVG      |         |
| 2   | 7400.2600    | 43.42                      | 10.47                   | 53.89                     | 74.00           | -20.11       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

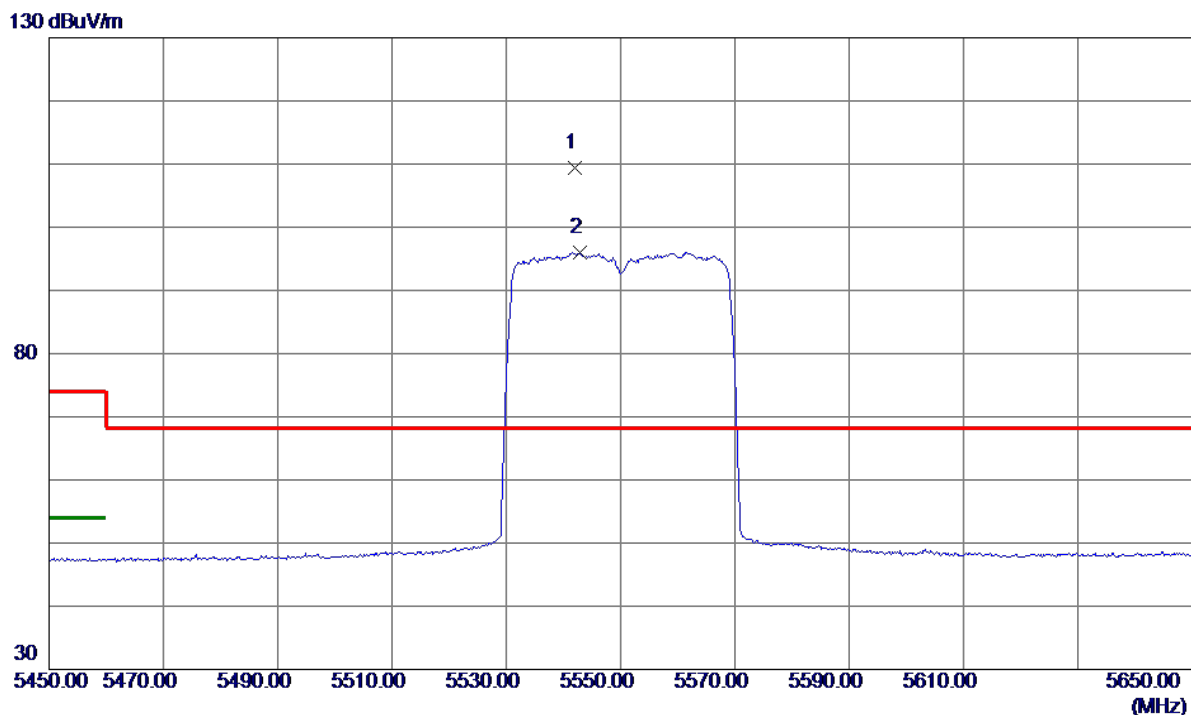


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5542.0000    | 93.20                      | 16.15                   | 109.35                    | 68.20           | 41.15        | Peak     | No Limit |
| 2   | 5542.8000    | 79.82                      | 16.15                   | 95.97                     | 999.00          | -903.03      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

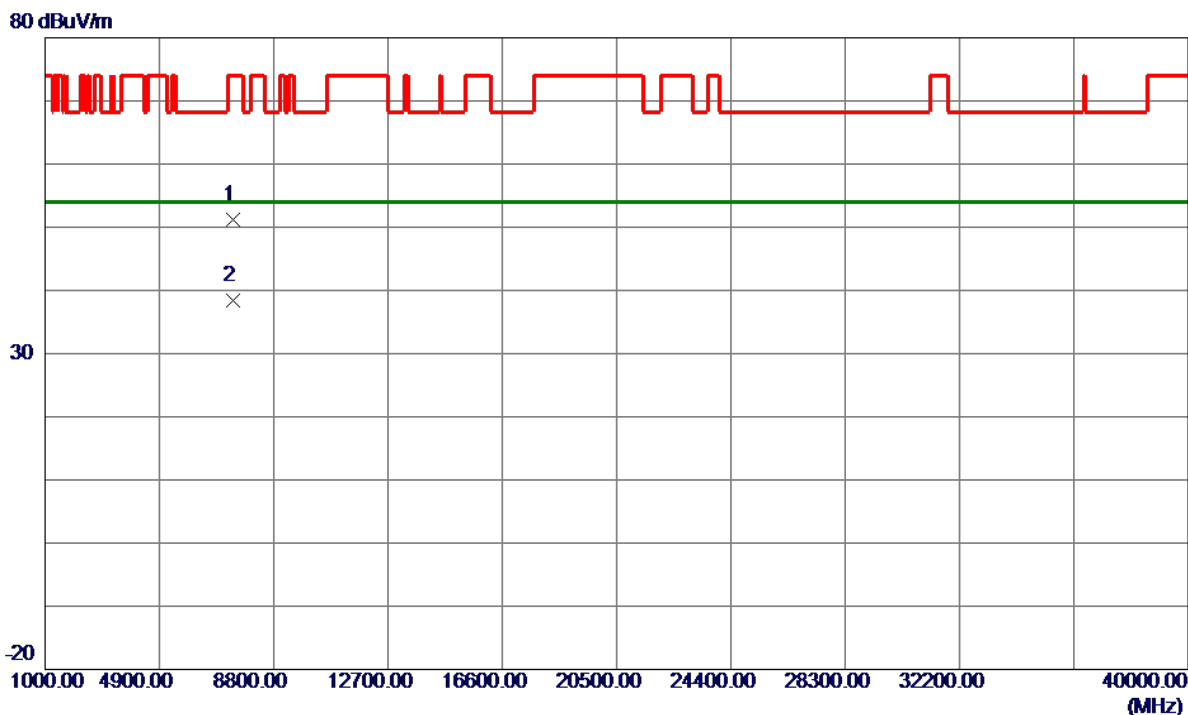


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7399.8600    | 40.66                      | 10.47                   | 51.13                     | 74.00           | -22.87       | Peak     |         |
| 2 * | 7400.4880    | 28.00                      | 10.47                   | 38.47                     | 54.00           | -15.53       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

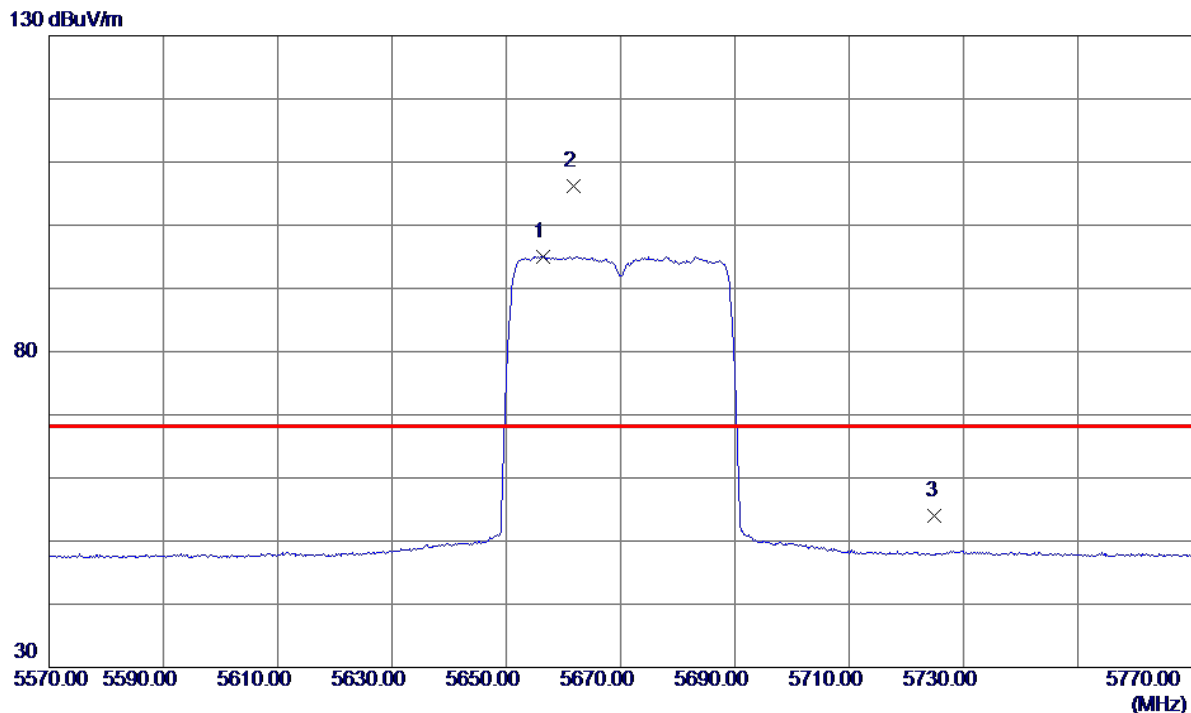


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5656.4000    | 78.71                      | 16.38                   | 95.09                     | 999.00          | -903.91      | AVG      | No Limit |
| 2 * | 5661.8000    | 89.72                      | 16.39                   | 106.11                    | 68.20           | 37.91        | Peak     | No Limit |
| 3   | 5725.0000    | 37.42                      | 16.51                   | 53.93                     | 68.20           | -14.27       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

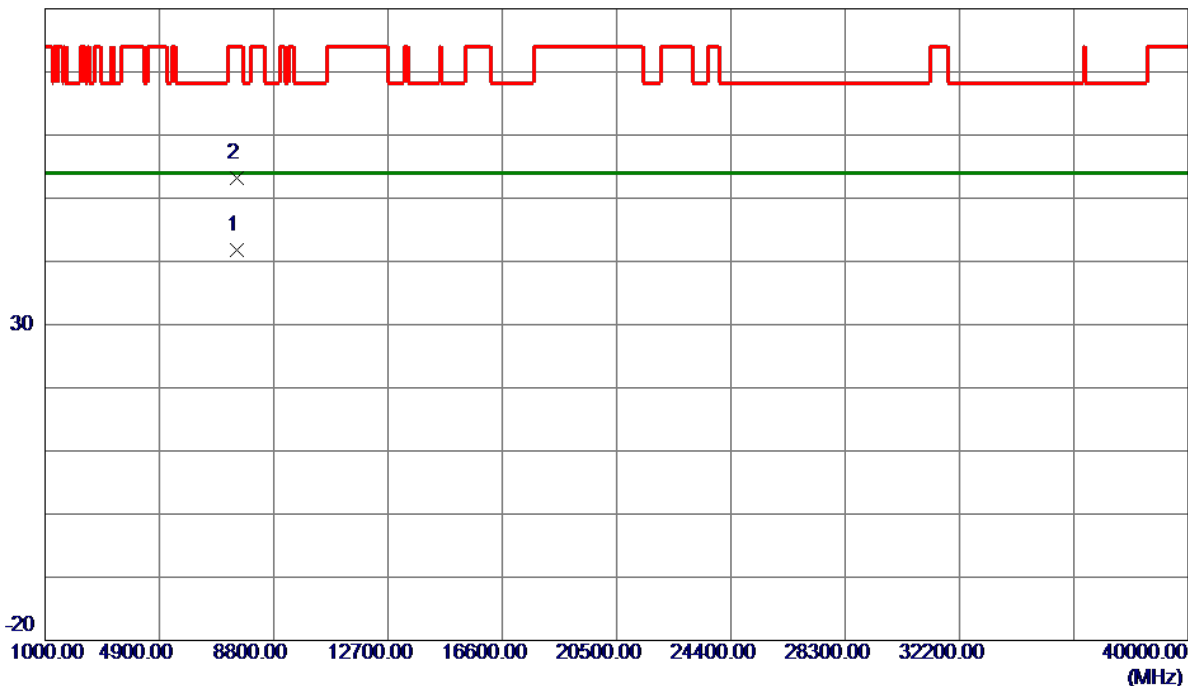


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7560.0150    | 31.15                      | 10.60                   | 41.75                     | 54.00           | -12.25       | AVG      |         |
| 2   | 7560.6200    | 42.67                      | 10.60                   | 53.27                     | 74.00           | -20.73       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

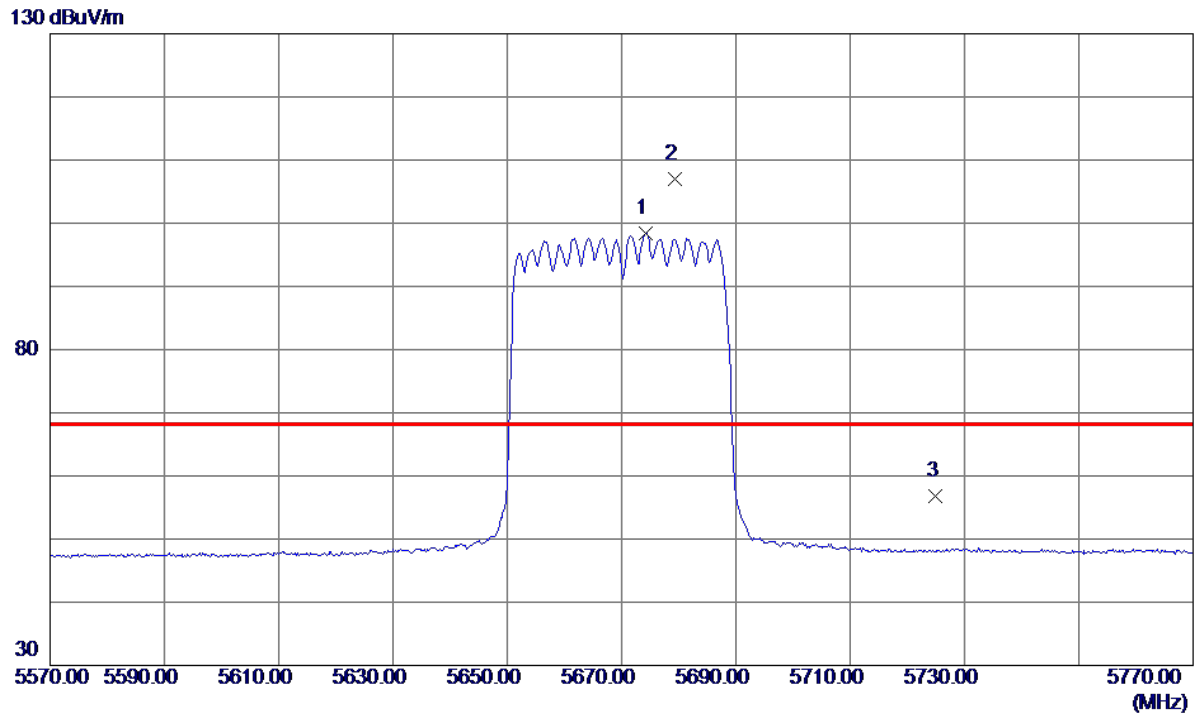


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5674.2000    | 81.94                      | 16.41                   | 98.35                     | 999.00          | -900.65      | AVG      | No Limit |
| 2 * | 5679.4000    | 90.50                      | 16.42                   | 106.92                    | 68.20           | 38.72        | Peak     | No Limit |
| 3   | 5725.0000    | 40.29                      | 16.51                   | 56.80                     | 68.20           | -11.40       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

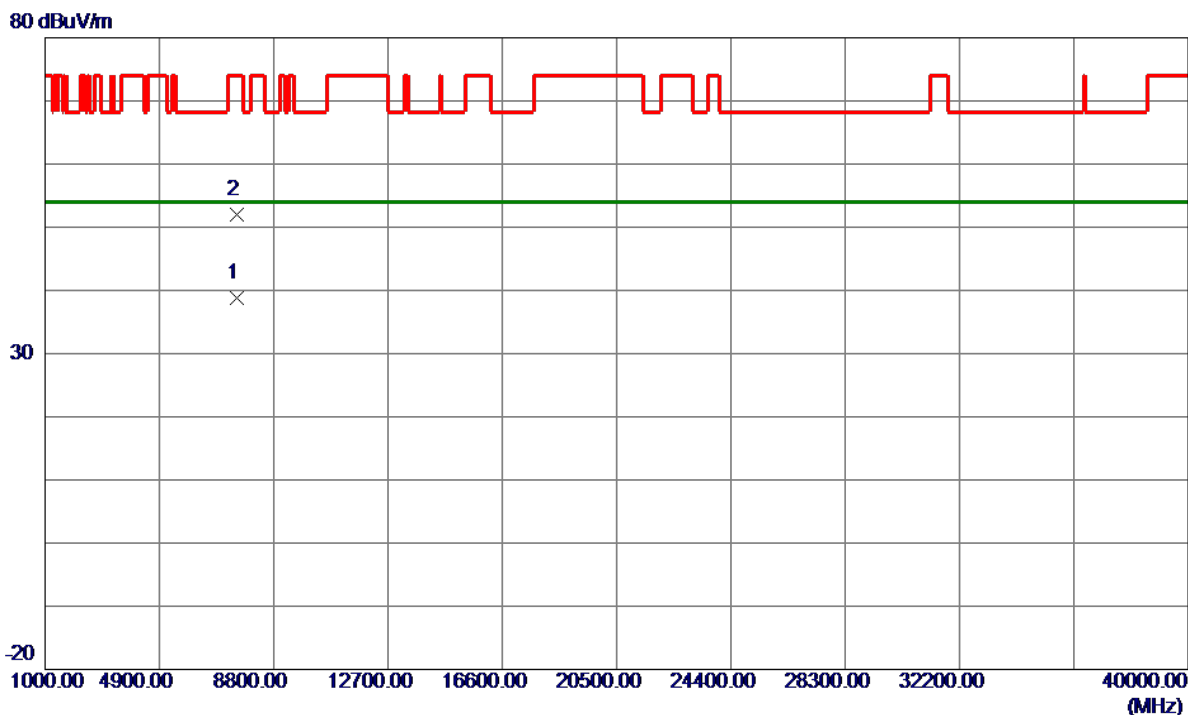


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7560.2700    | 28.19                      | 10.60                   | 38.79                     | 54.00           | -15.21       | AVG      |         |
| 2   | 7560.5360    | 41.39                      | 10.60                   | 51.99                     | 74.00           | -22.01       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

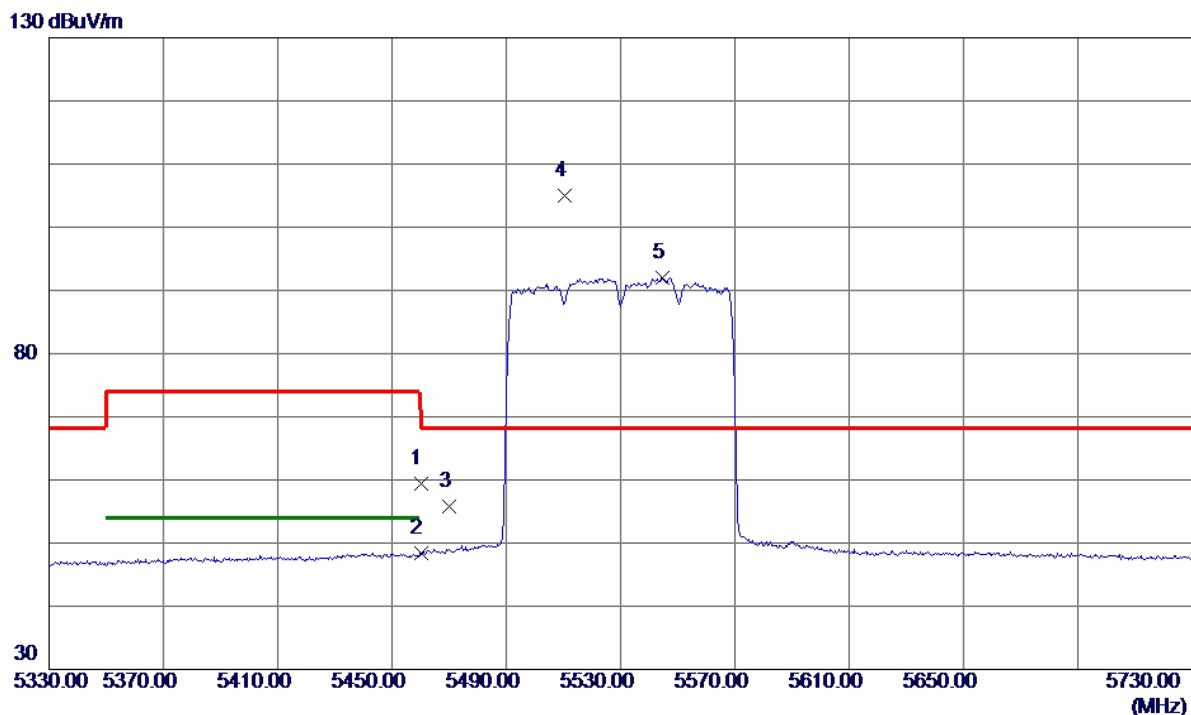


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 43.38                      | 15.97                   | 59.35                     | 74.00           | -14.65       | Peak     |          |
| 2   | 5460.0000    | 32.43                      | 15.97                   | 48.40                     | 54.00           | -5.60        | AVG      |          |
| 3   | 5470.0000    | 39.81                      | 16.00                   | 55.81                     | 68.20           | -12.39       | Peak     |          |
| 4 * | 5510.4000    | 88.95                      | 16.09                   | 105.04                    | 68.20           | 36.84        | Peak     | No Limit |
| 5   | 5544.8000    | 75.80                      | 16.15                   | 91.95                     | 999.00          | -907.05      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

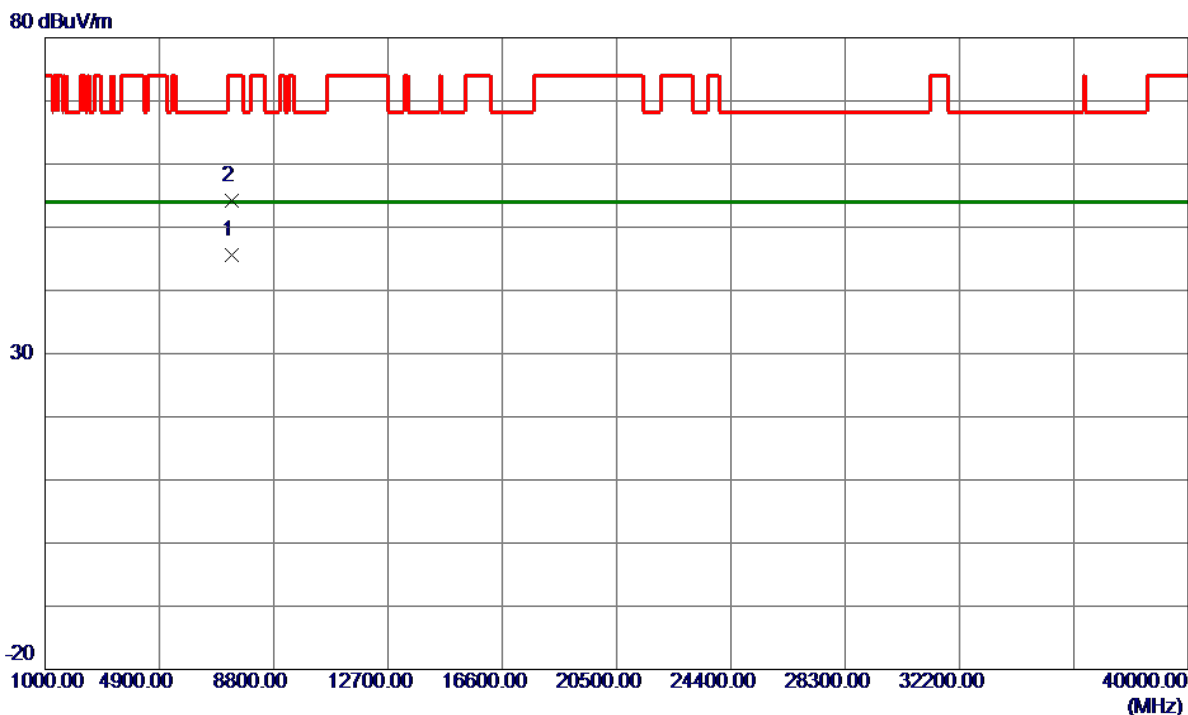


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7373.1900    | 35.18                      | 10.42                   | 45.60                     | 54.00           | -8.40        | AVG      |         |
| 2   | 7373.2750    | 43.86                      | 10.42                   | 54.28                     | 74.00           | -19.72       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

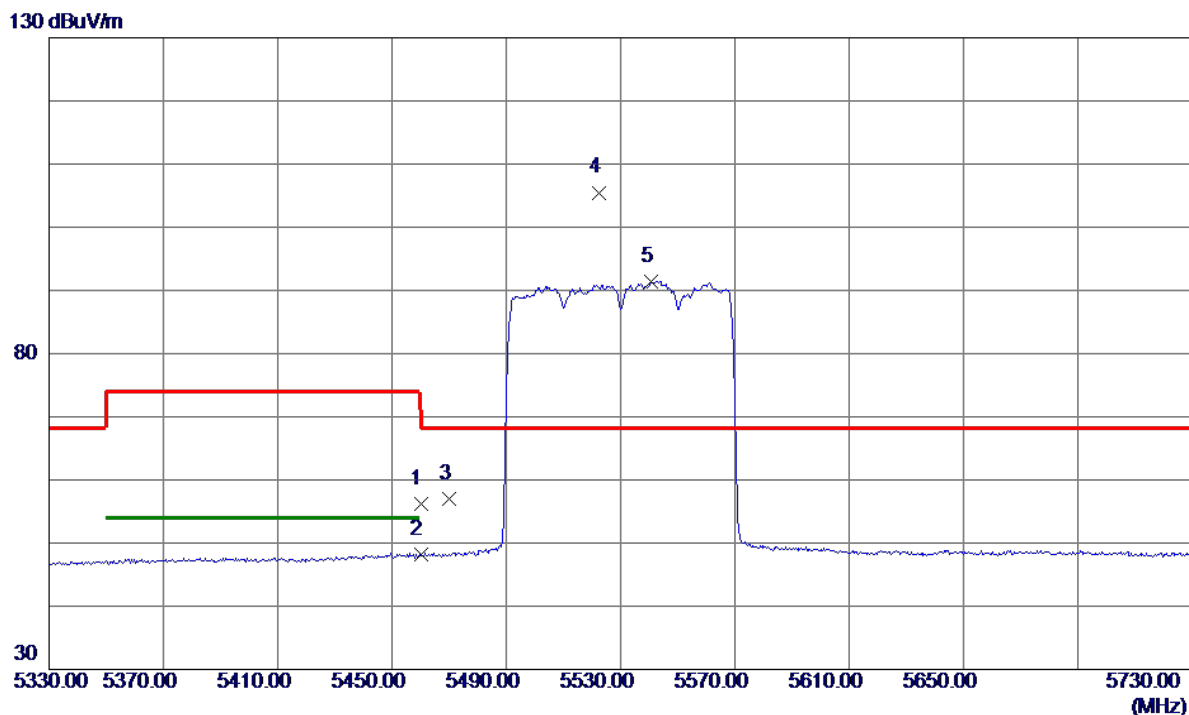


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.18                      | 15.97                   | 56.15                     | 74.00           | -17.85       | Peak     |          |
| 2   | 5460.0000    | 32.20                      | 15.97                   | 48.17                     | 54.00           | -5.83        | AVG      |          |
| 3   | 5470.0000    | 40.95                      | 16.00                   | 56.95                     | 68.20           | -11.25       | Peak     |          |
| 4 * | 5522.4000    | 89.39                      | 16.11                   | 105.50                    | 68.20           | 37.30        | Peak     | No Limit |
| 5   | 5540.8000    | 75.28                      | 16.15                   | 91.43                     | 999.00          | -907.57      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

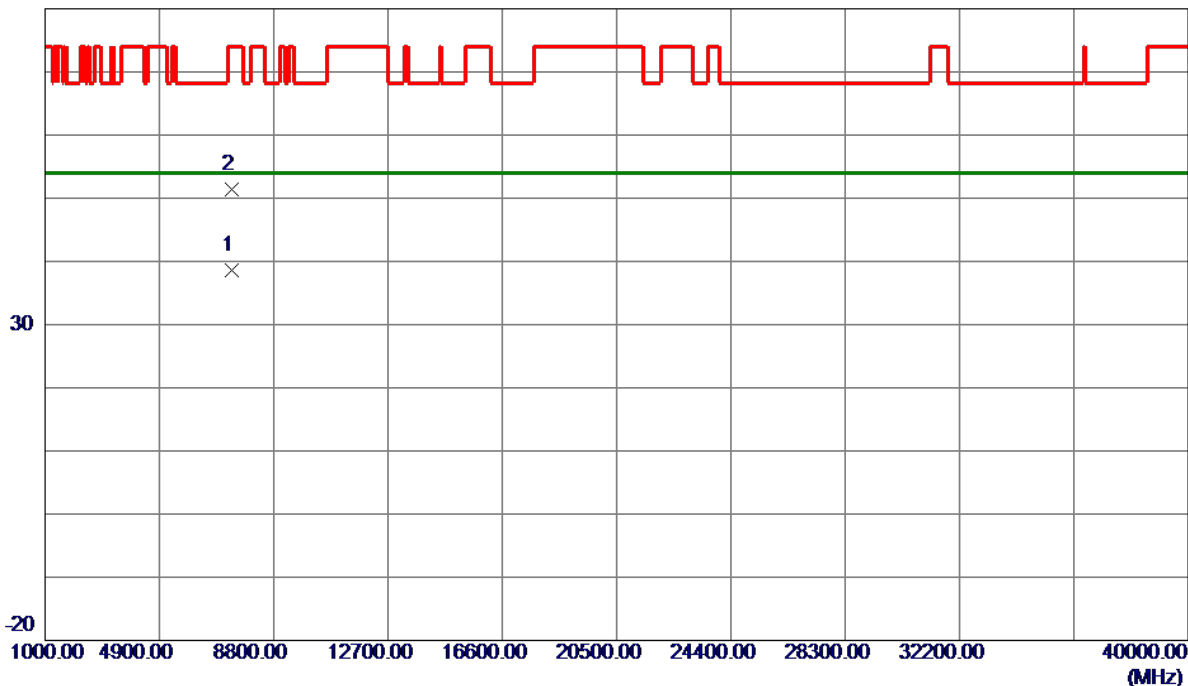


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7372.0480    | 28.10                      | 10.42                   | 38.52                     | 54.00           | -15.48       | AVG      |         |
| 2   | 7372.4100    | 41.06                      | 10.42                   | 51.48                     | 74.00           | -22.52       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

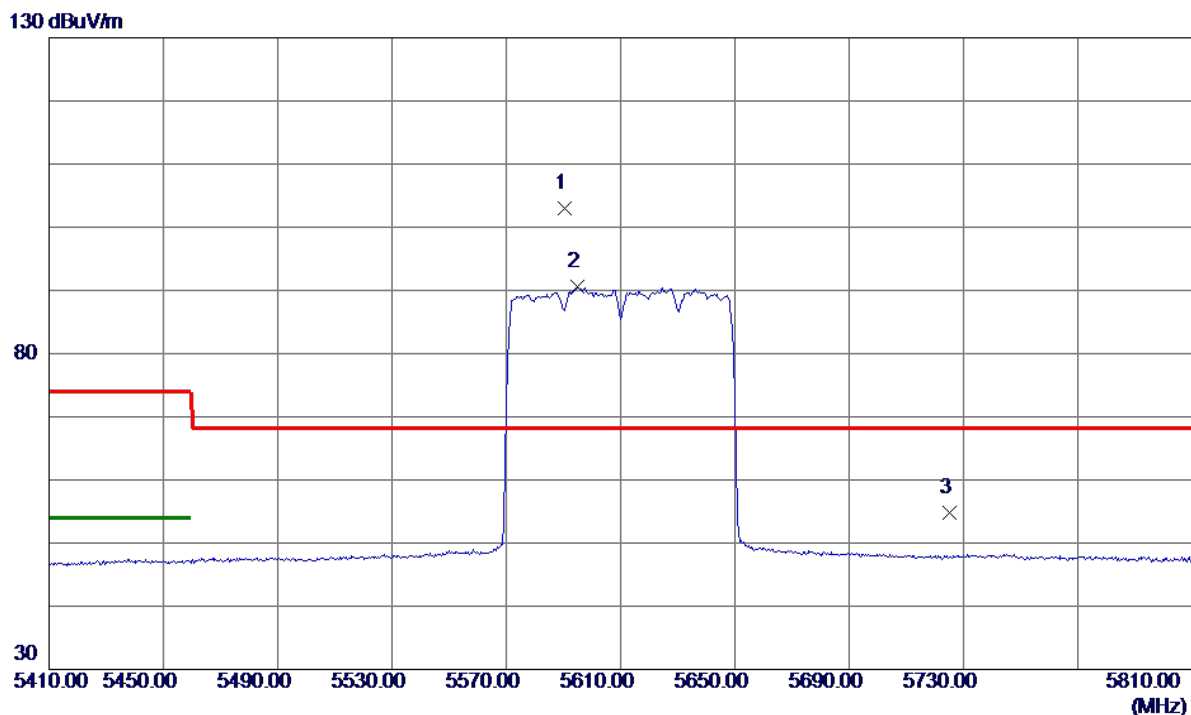


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5590.4000    | 86.86                      | 16.24                   | 103.10                    | 68.20           | 34.90        | Peak     | No Limit |
| 2   | 5594.8000    | 74.26                      | 16.25                   | 90.51                     | 999.00          | -908.49      | AVG      | No Limit |
| 3   | 5725.0000    | 38.31                      | 16.51                   | 54.82                     | 68.20           | -13.38       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

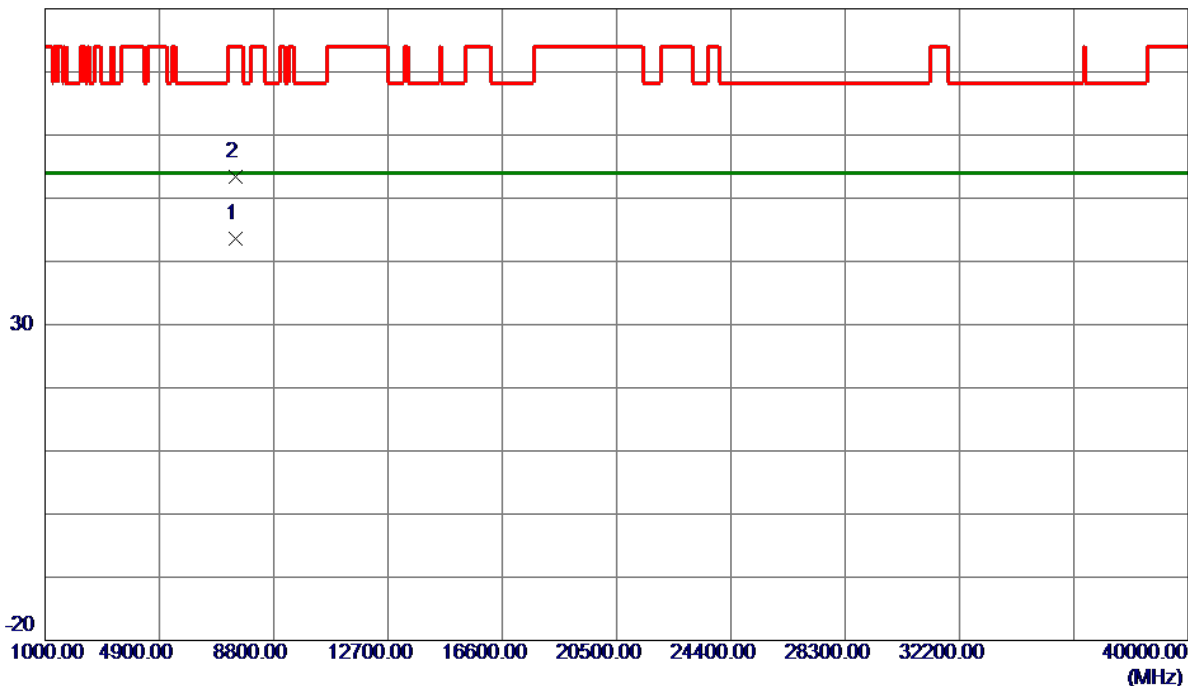


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7479.8550    | 32.96                      | 10.61                   | 43.57                     | 54.00           | -10.43       | AVG      |         |
| 2   | 7480.2800    | 42.72                      | 10.61                   | 53.33                     | 74.00           | -20.67       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

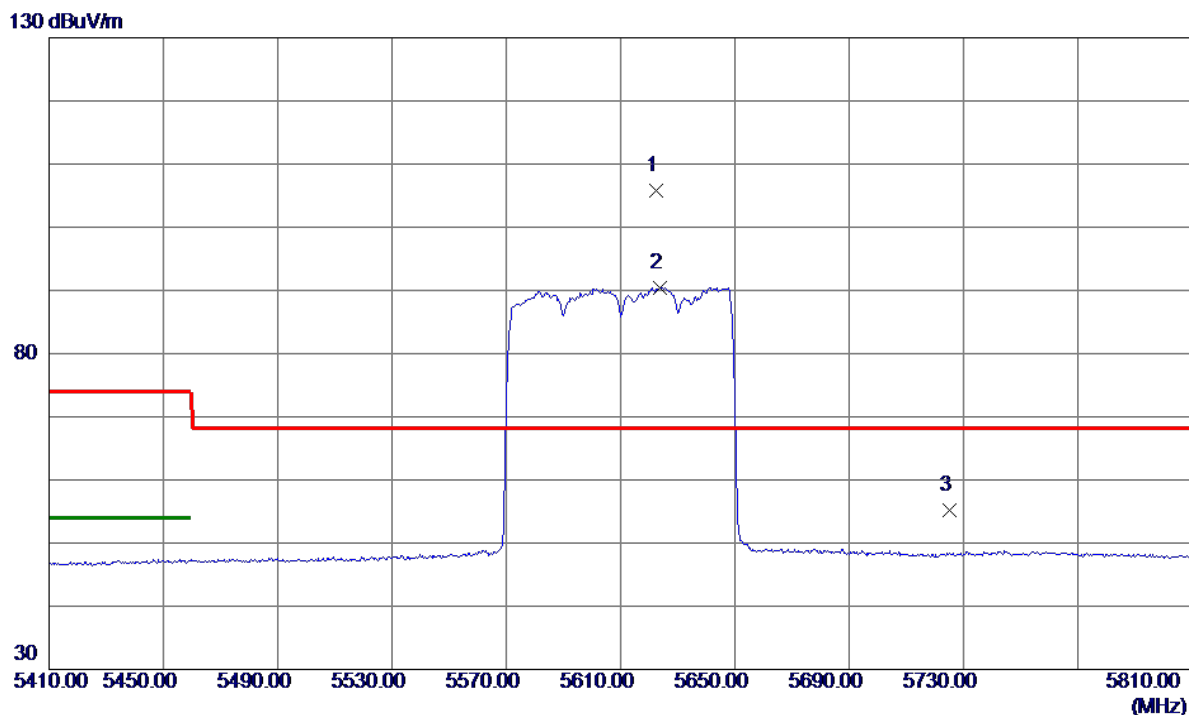


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5622.4000    | 89.54                      | 16.31                   | 105.85                    | 68.20           | 37.65        | Peak     | No Limit |
| 2   | 5623.6000    | 74.15                      | 16.31                   | 90.46                     | 999.00          | -908.54      | AVG      | No Limit |
| 3   | 5725.0000    | 38.65                      | 16.51                   | 55.16                     | 68.20           | -13.04       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

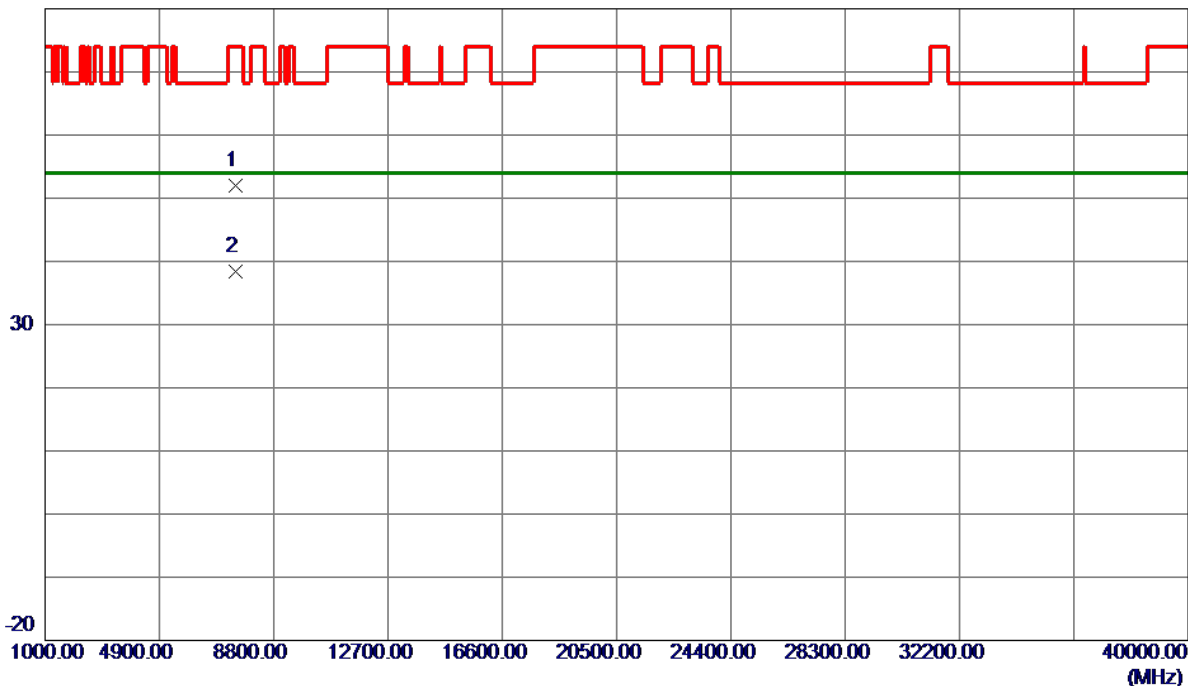


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7480.1860    | 41.31                      | 10.61                   | 51.92                     | 74.00           | -22.08       | Peak     |         |
| 2 * | 7480.4180    | 27.74                      | 10.61                   | 38.35                     | 54.00           | -15.65       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

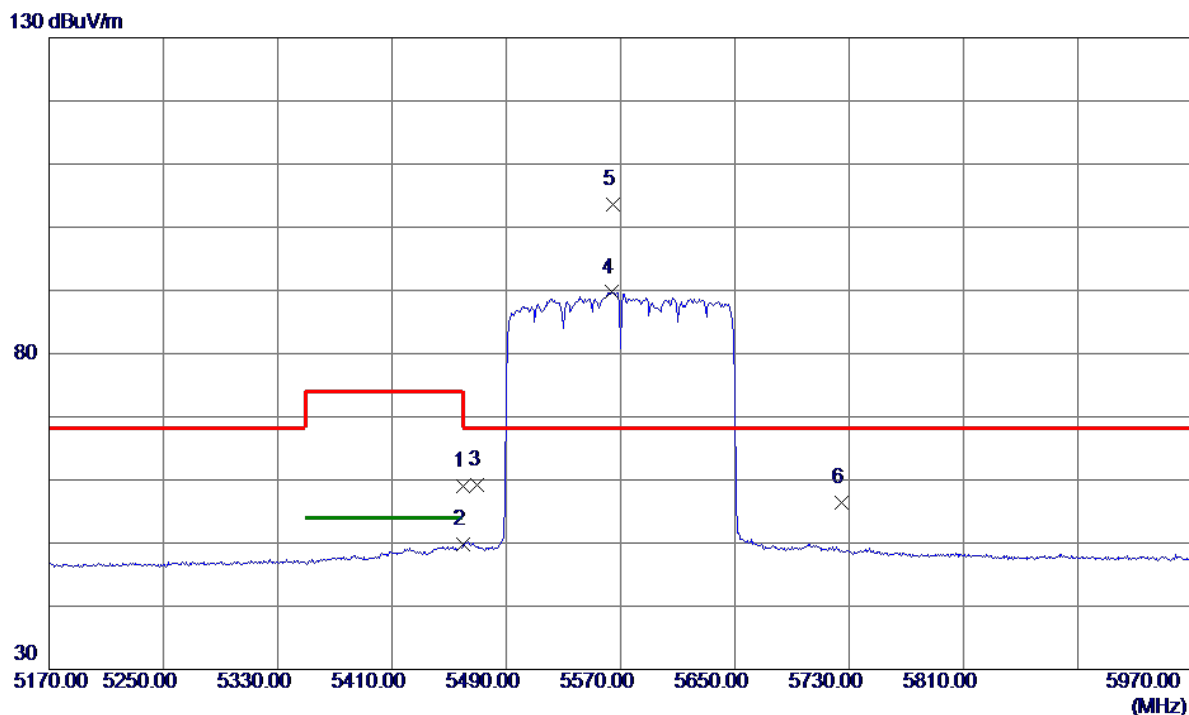


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 42.97                      | 15.97                   | 58.94                     | 74.00           | -15.06       | Peak     |          |
| 2   | 5460.0000    | 33.79                      | 15.97                   | 49.76                     | 54.00           | -4.24        | AVG      |          |
| 3   | 5470.0000    | 43.14                      | 16.00                   | 59.14                     | 68.20           | -9.06        | Peak     |          |
| 4   | 5563.6000    | 73.51                      | 16.19                   | 89.70                     | 999.00          | -909.30      | AVG      | No Limit |
| 5 * | 5564.4000    | 87.43                      | 16.19                   | 103.62                    | 68.20           | 35.42        | Peak     | No Limit |
| 6   | 5725.0000    | 39.89                      | 16.51                   | 56.40                     | 68.20           | -11.80       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

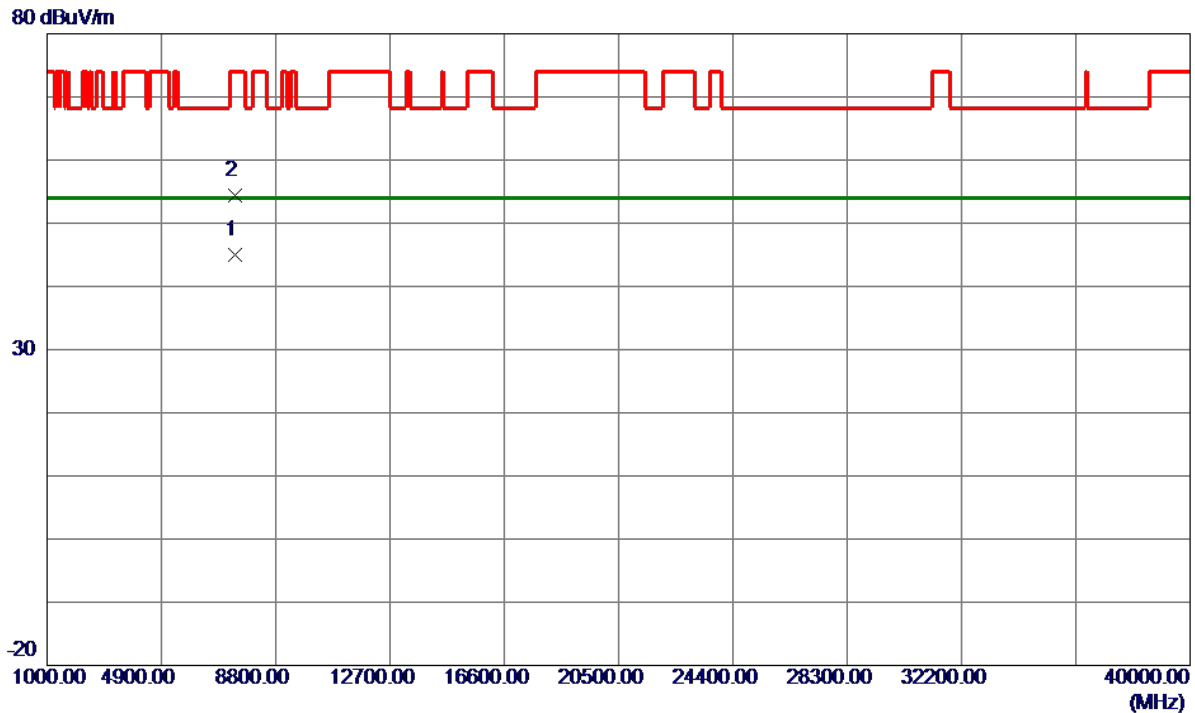


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7426.6350    | 34.44                      | 10.52                   | 44.96                     | 54.00           | -9.04        | AVG      |         |
| 2   | 7426.8100    | 43.90                      | 10.52                   | 54.42                     | 74.00           | -19.58       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

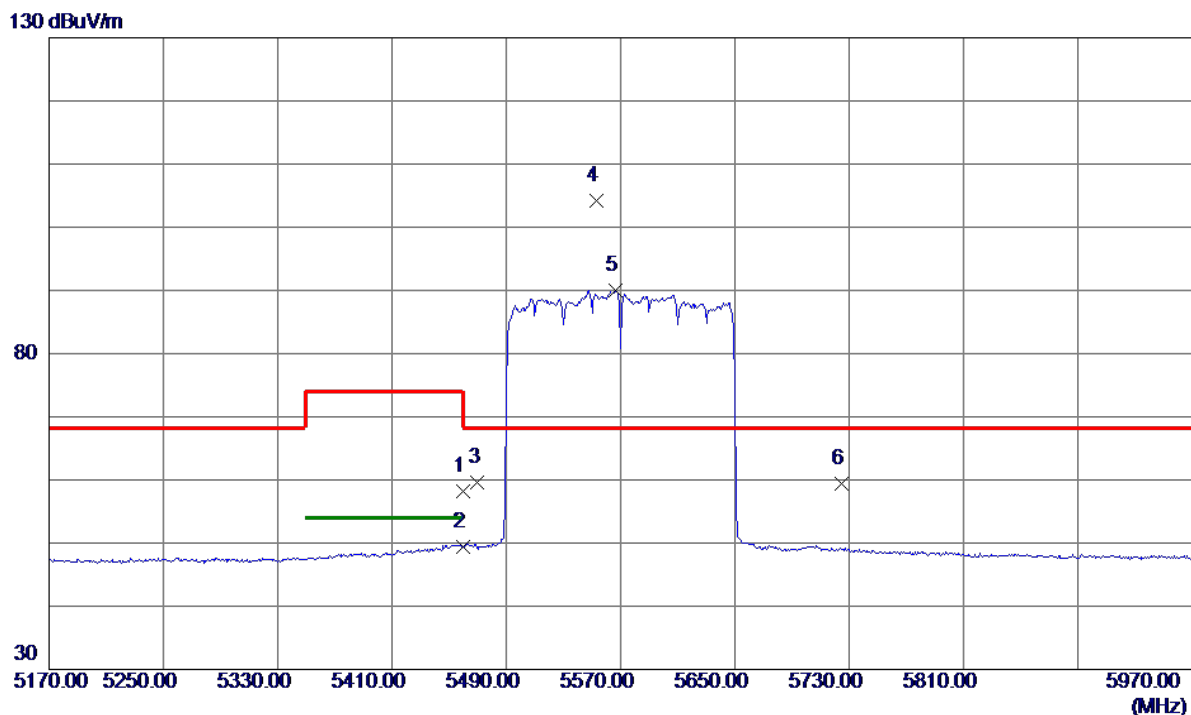


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 42.15                      | 15.97                   | 58.12                     | 74.00           | -15.88       | Peak     |          |
| 2   | 5460.0000    | 33.48                      | 15.97                   | 49.45                     | 54.00           | -4.55        | AVG      |          |
| 3   | 5470.0000    | 43.58                      | 16.00                   | 59.58                     | 68.20           | -8.62        | Peak     |          |
| 4 * | 5553.2000    | 88.05                      | 16.17                   | 104.22                    | 68.20           | 36.02        | Peak     | No Limit |
| 5   | 5566.8000    | 73.77                      | 16.20                   | 89.97                     | 999.00          | -909.03      | AVG      | No Limit |
| 6   | 5725.0000    | 42.83                      | 16.51                   | 59.34                     | 68.20           | -8.86        | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

80 dBuV/m

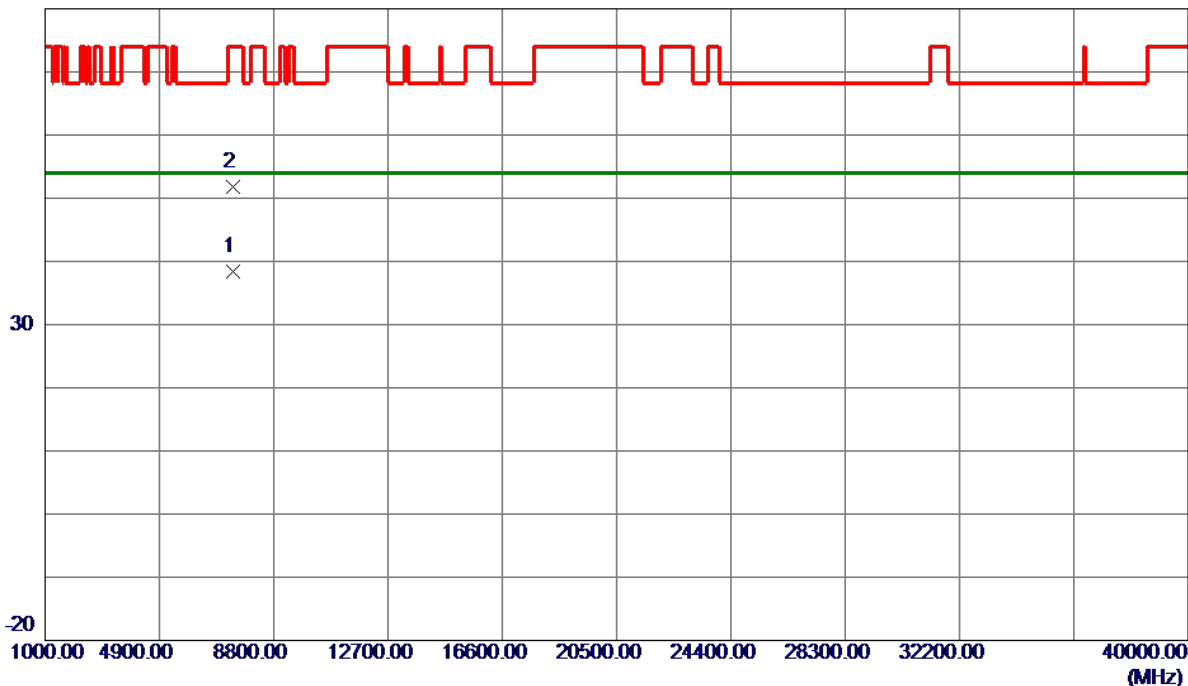

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7426.0220    | 27.89                      | 10.51                   | 38.40                     | 54.00           | -15.60       | AVG      |         |
| 2   | 7427.9160    | 41.26                      | 10.52                   | 51.78                     | 74.00           | -22.22       | Peak     |         |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## Beamforming

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

130 dBuV/m

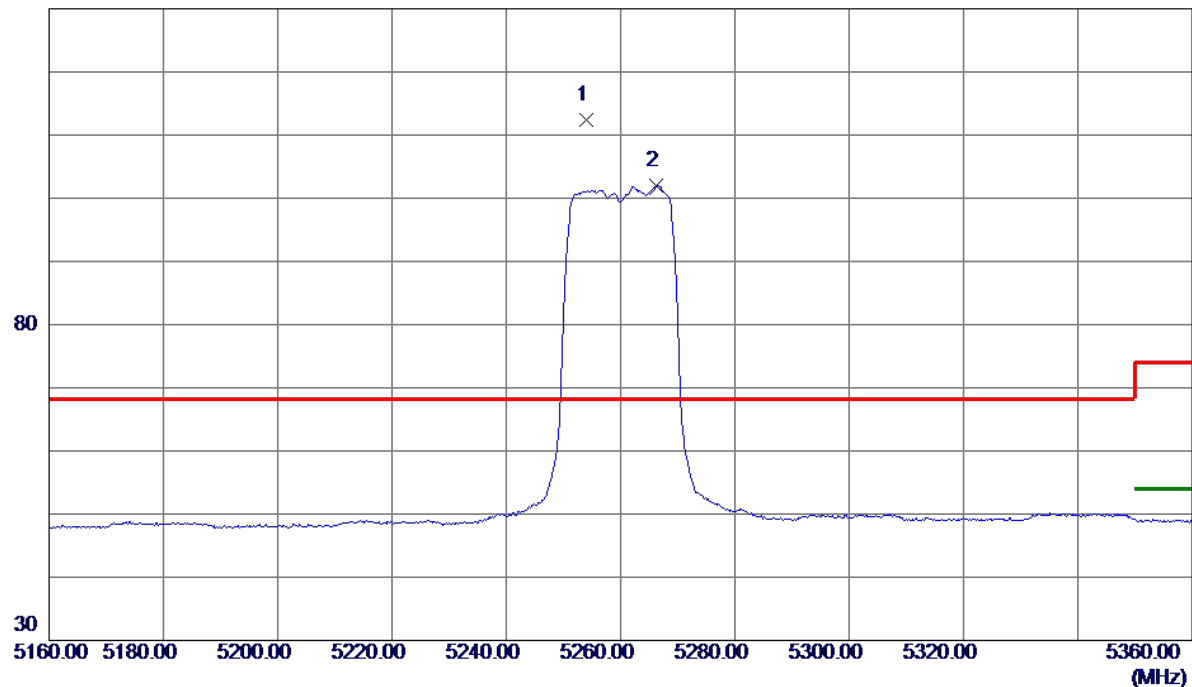


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5254.0000    | 96.89                      | 15.50                   | 112.39                    | 68.20           | 44.19        | Peak     | No Limit |
| 2   | 5266.2000    | 86.46                      | 15.53                   | 101.99                    | 999.00          | -897.01      | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

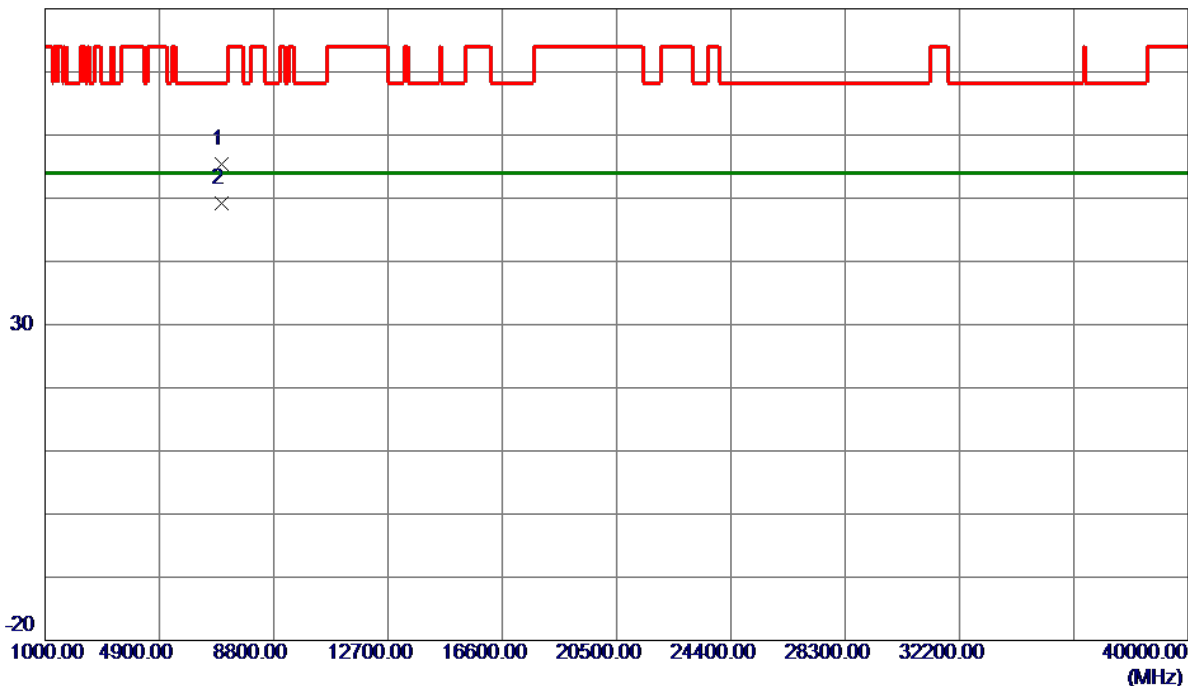


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7013.2440    | 45.53                      | 9.81                    | 55.34                     | 68.20           | -12.86       | Peak     |         |
| 2 * | 7013.3800    | 39.43                      | 9.81                    | 49.24                     | 54.00           | -4.76        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

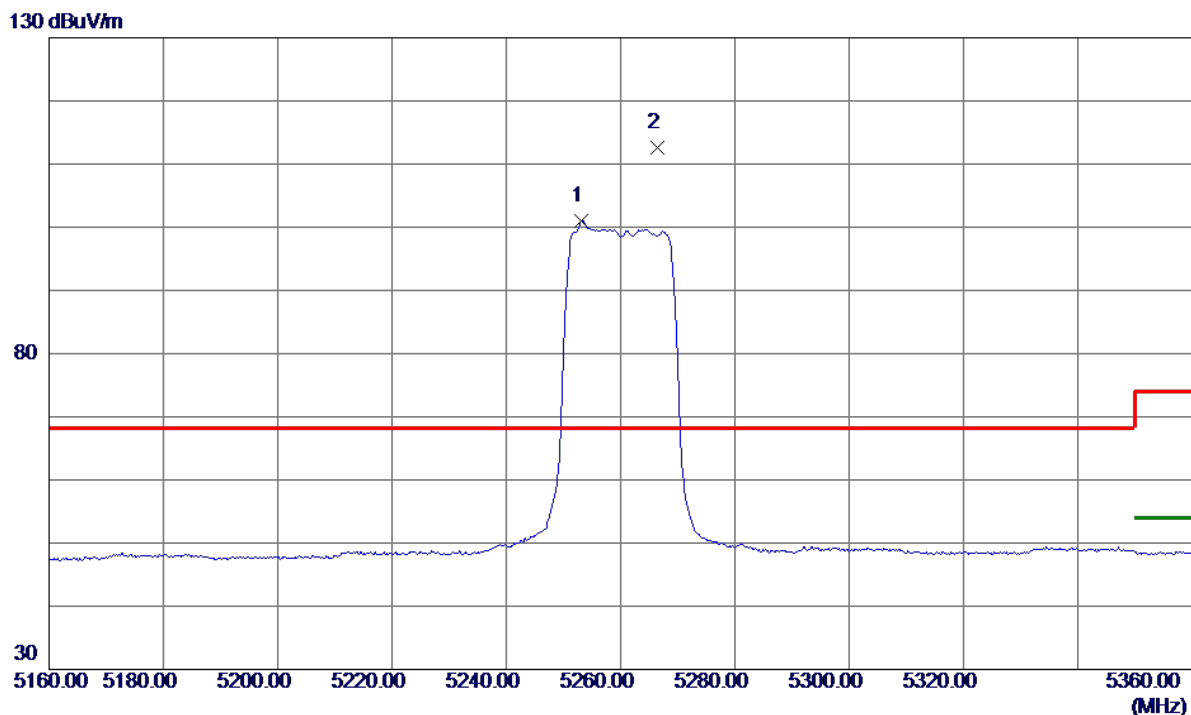


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5253.2000    | 85.59                      | 15.50                   | 101.09                    | 999.00          | -897.91      | AVG      | No Limit |
| 2 * | 5266.4000    | 97.03                      | 15.53                   | 112.56                    | 68.20           | 44.36        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5260 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

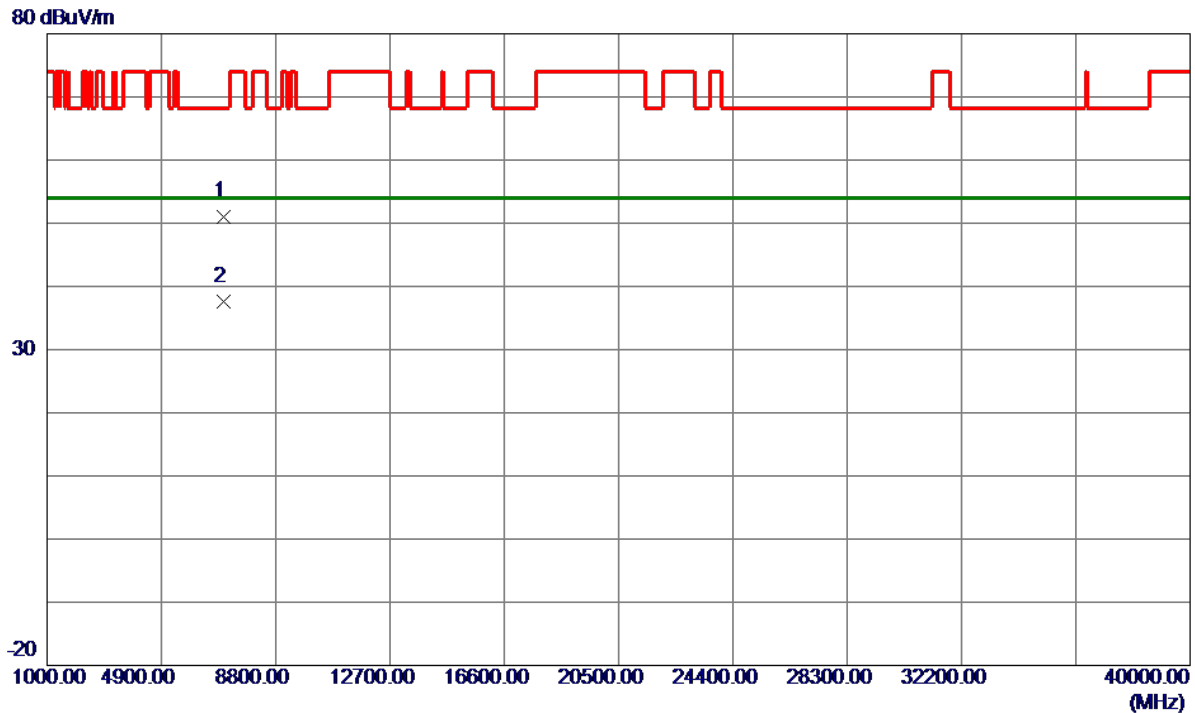


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 7012.4600 | 41.29         | 9.81           | 51.10       | 68.20  | -17.10 | Peak     |         |
| 2 * | 7013.1840 | 27.85         | 9.81           | 37.66       | 54.00  | -16.34 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

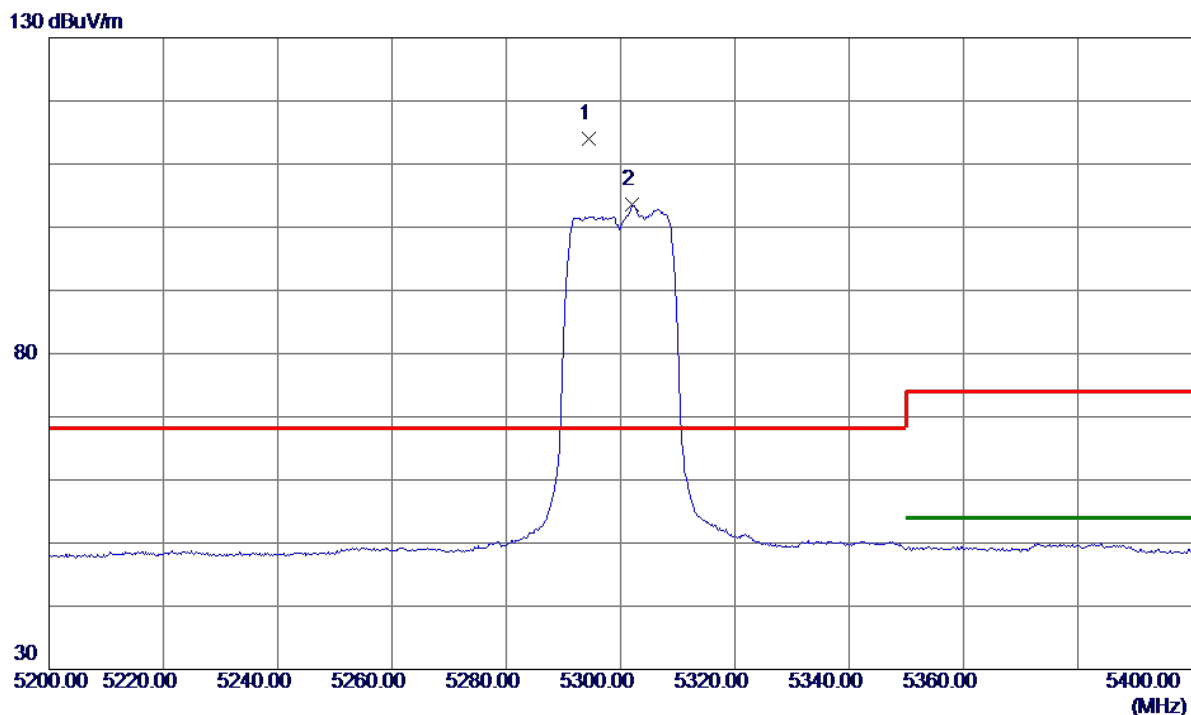


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5294.4000    | 98.45                      | 15.59                   | 114.04                    | 68.20           | 45.84        | Peak     | No Limit |
| 2   | 5302.0000    | 87.91                      | 15.61                   | 103.52                    | 99.00           | -895.48      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

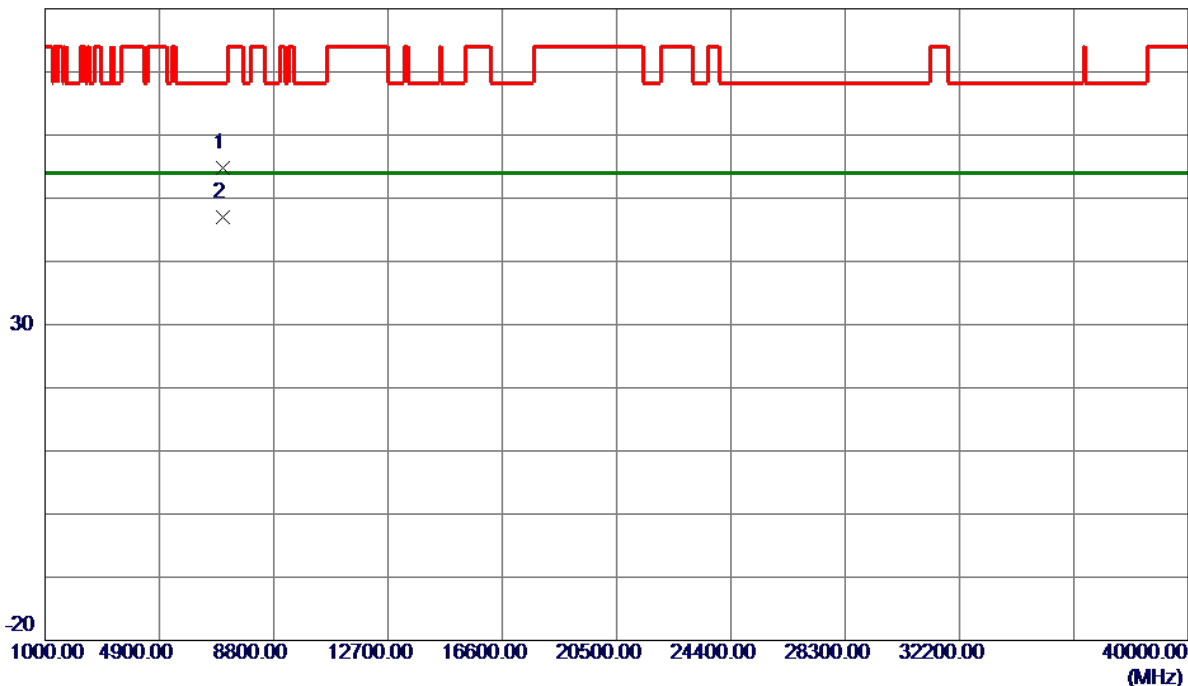


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7066.3840    | 44.93                      | 9.90                    | 54.83                     | 68.20           | -13.37       | Peak     |         |
| 2 * | 7066.6240    | 37.05                      | 9.90                    | 46.95                     | 54.00           | -7.05        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

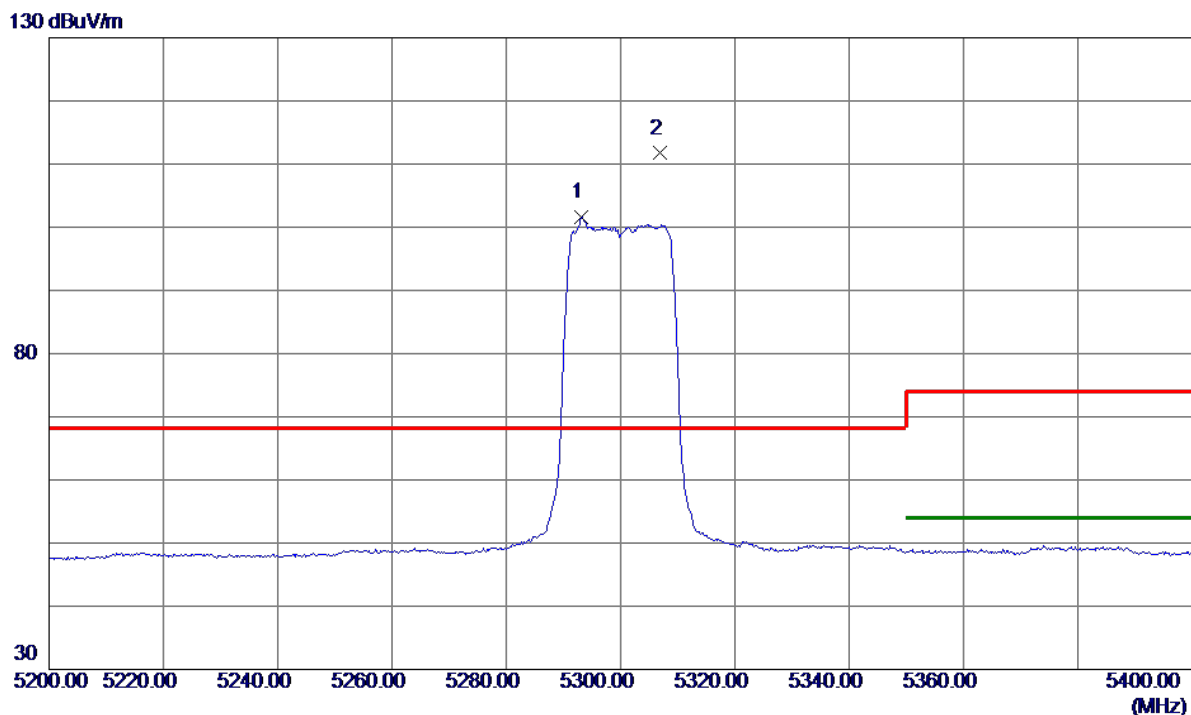


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5293.2000    | 85.92                      | 15.59                   | 101.51                    | 999.00          | -897.49      | AVG      | No Limit |
| 2 * | 5306.8000    | 96.08                      | 15.62                   | 111.70                    | 68.20           | 43.50        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5300 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

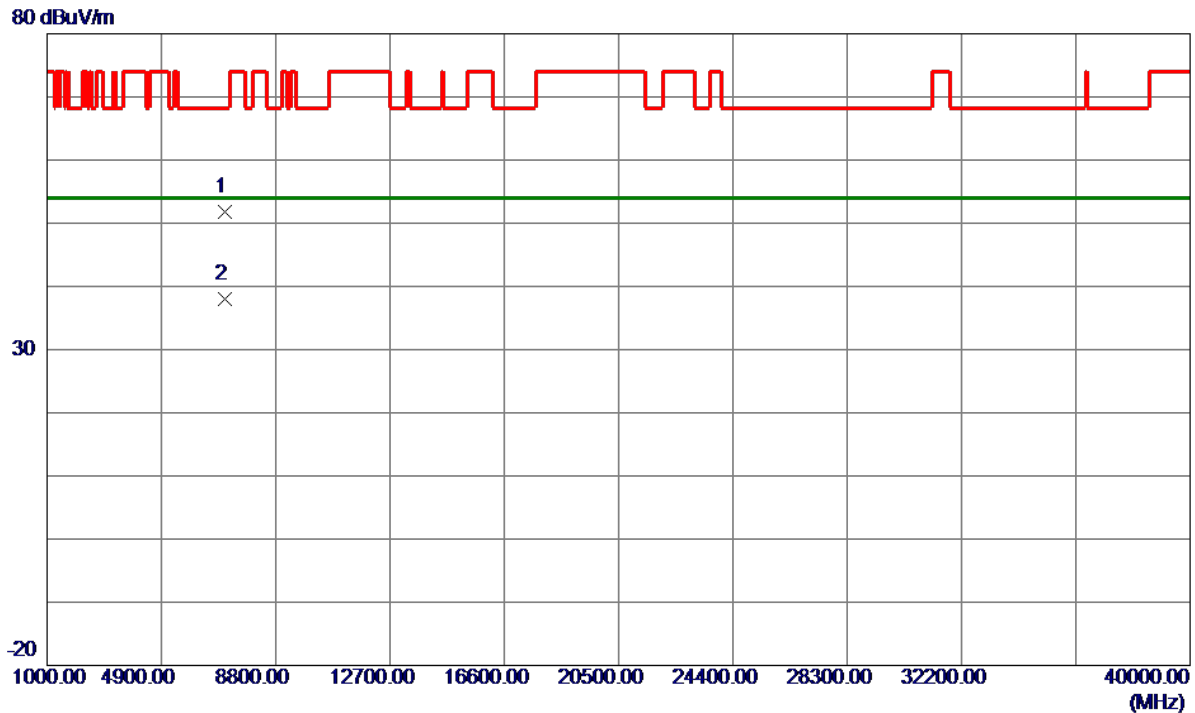


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7067.3000    | 41.90                      | 9.90                    | 51.80                     | 68.20           | -16.40       | Peak     |         |
| 2 * | 7067.5540    | 28.04                      | 9.90                    | 37.94                     | 54.00           | -16.06       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

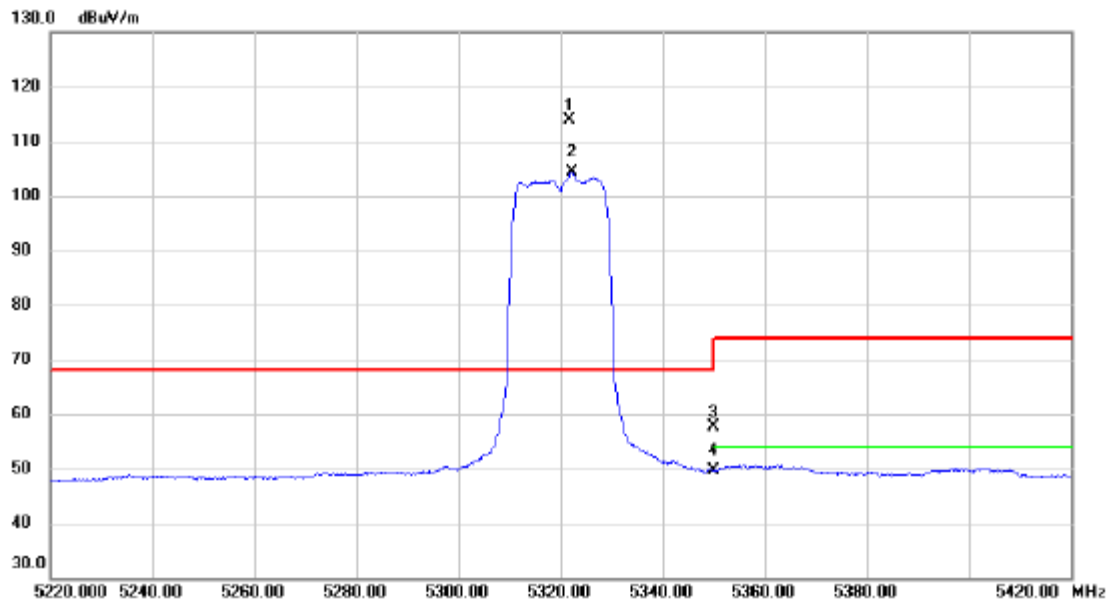


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 5321.800     | 98.34                    | 15.65                   | 113.99                     | 68.20           | 45.79        | peak     | No Limit |
| 2   | X   | 5322.200     | 88.83                    | 15.65                   | 104.48                     | 68.20           | 36.28        | AVG      | No Limit |
| 3   |     | 5350.000     | 41.84                    | 15.72                   | 57.56                      | 74.00           | -16.44       | peak     |          |
| 4   |     | 5350.000     | 33.96                    | 15.72                   | 49.68                      | 54.00           | -4.32        | AVG      |          |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

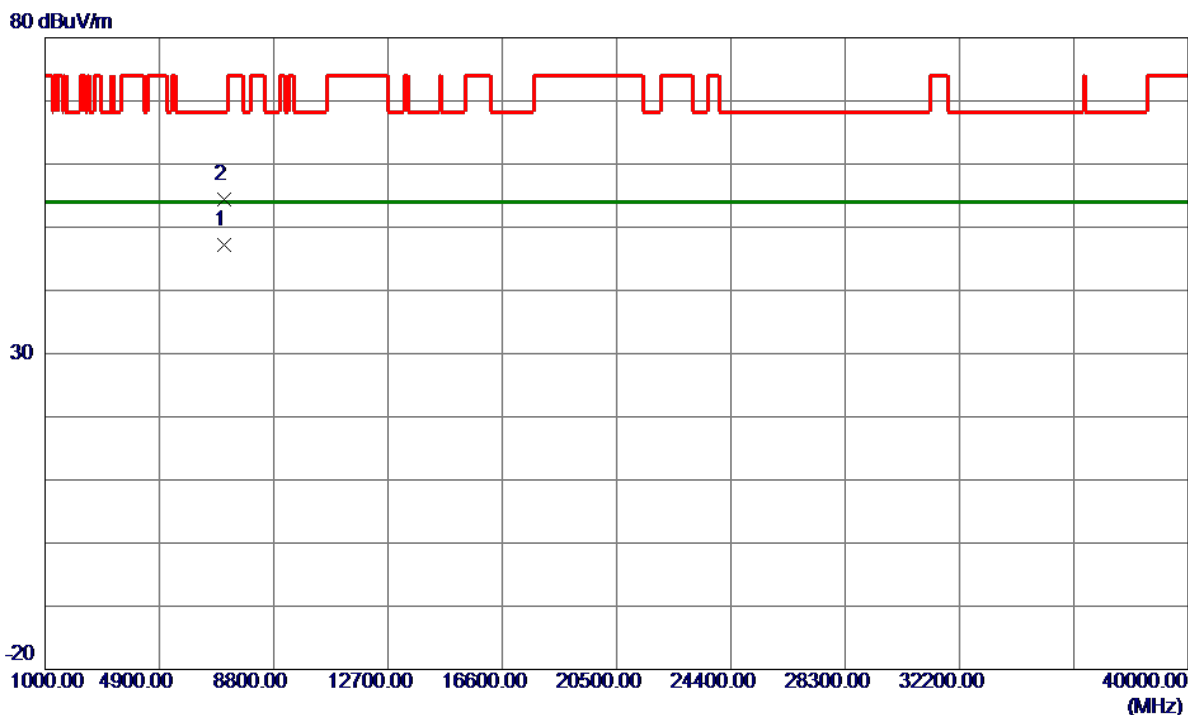


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7093.3060    | 37.28                      | 9.95                    | 47.23                     | 54.00           | -6.77        | AVG      |         |
| 2   | 7093.4640    | 44.54                      | 9.95                    | 54.49                     | 68.20           | -13.71       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

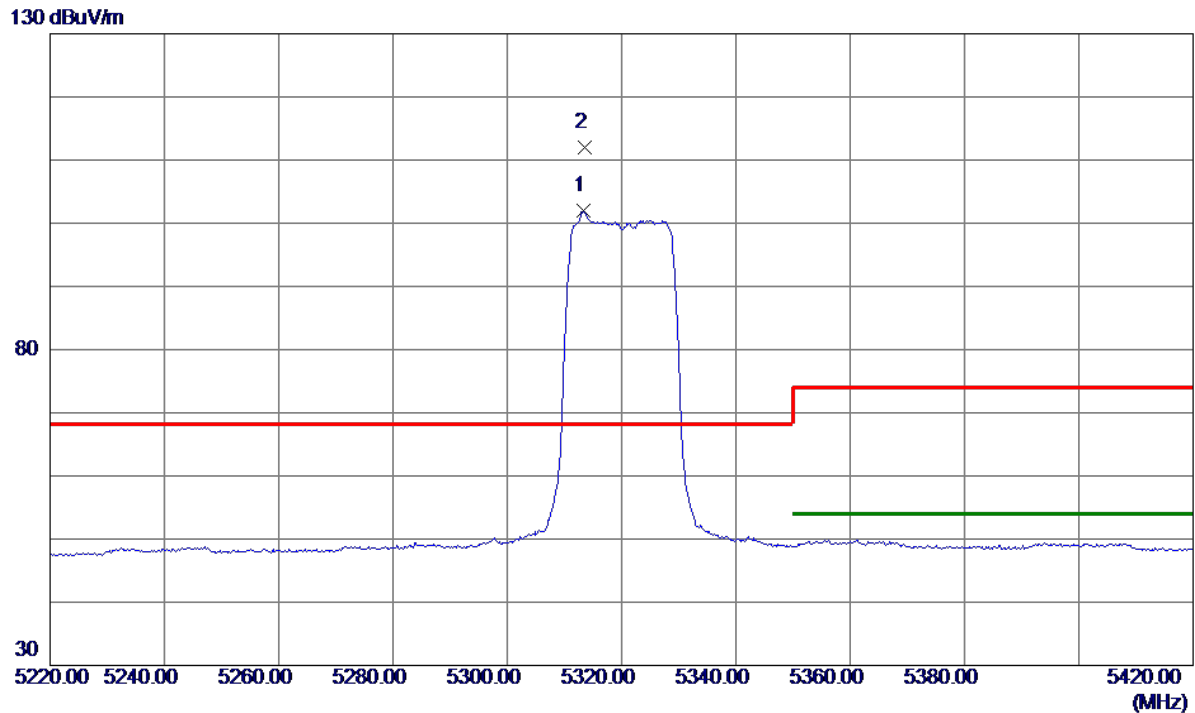


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5313.4000    | 86.32                      | 15.64                   | 101.96                    | 999.00          | -897.04      | AVG      | No Limit |
| 2 * | 5313.6000    | 96.37                      | 15.64                   | 112.01                    | 68.20           | 43.81        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode 5320 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

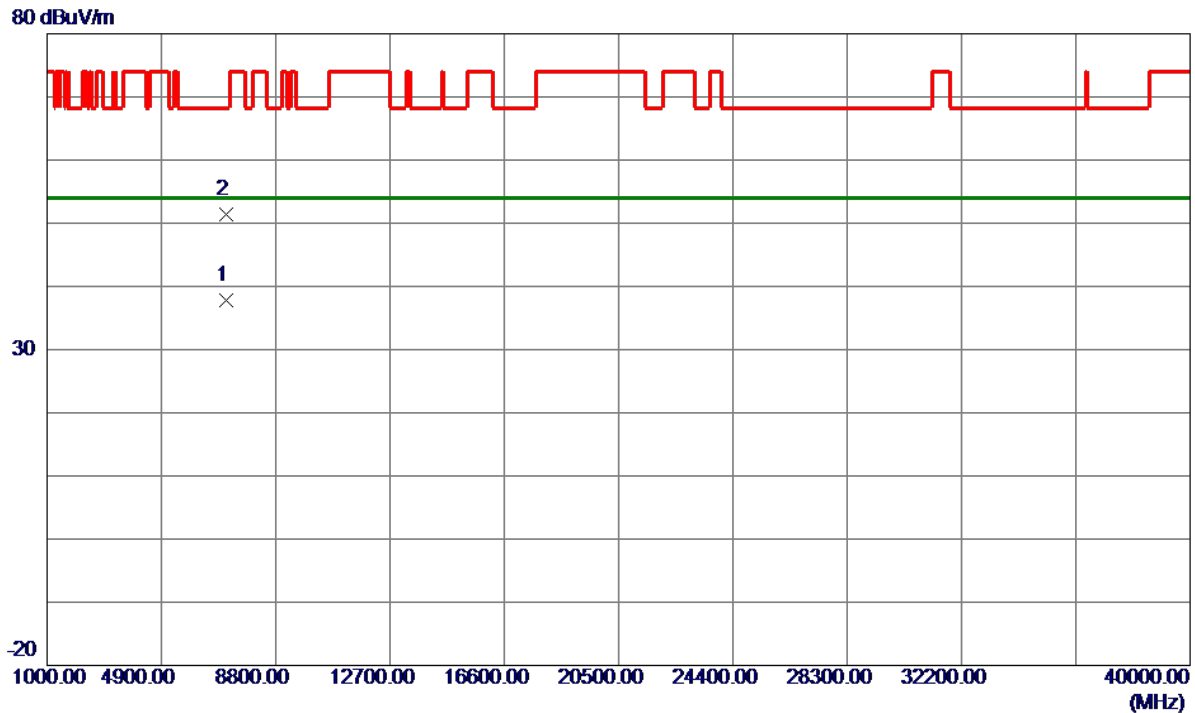


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7093.3060    | 27.93                      | 9.95                    | 37.88                     | 54.00           | -16.12       | AVG      |         |
| 2   | 7093.3640    | 41.39                      | 9.95                    | 51.34                     | 68.20           | -16.86       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

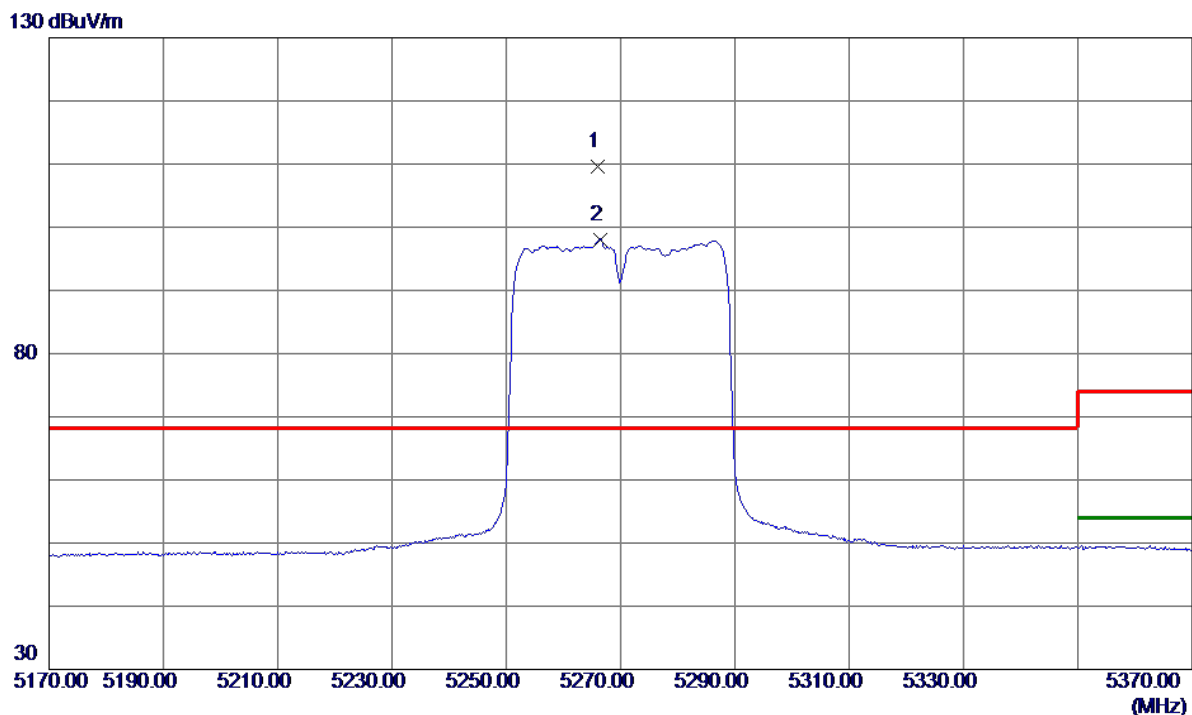


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5266.0000    | 94.15                      | 15.53                   | 109.68                    | 68.20           | 41.48        | Peak     | No Limit |
| 2   | 5266.4000    | 82.57                      | 15.53                   | 98.10                     | 999.00          | -900.90      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

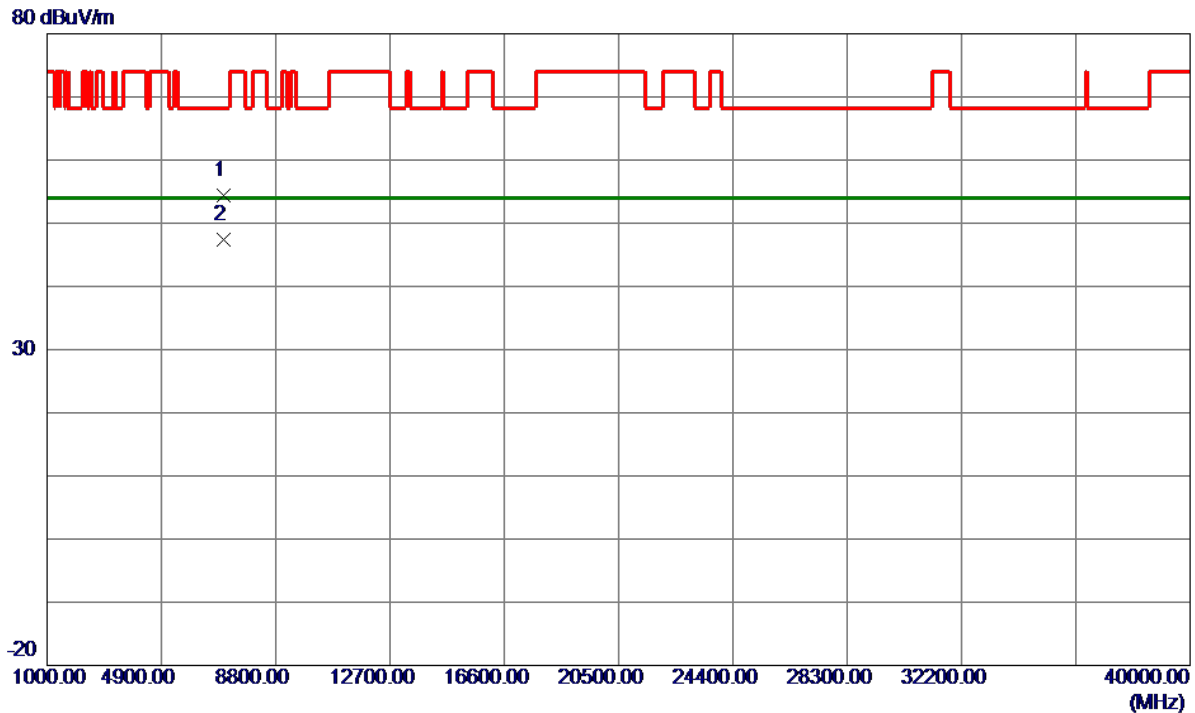


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 7026.5860    | 44.61                      | 9.84                    | 54.45                     | 68.20           | -13.75       | Peak     |         |
| 2 * | 7026.6700    | 37.50                      | 9.84                    | 47.34                     | 54.00           | -6.66        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

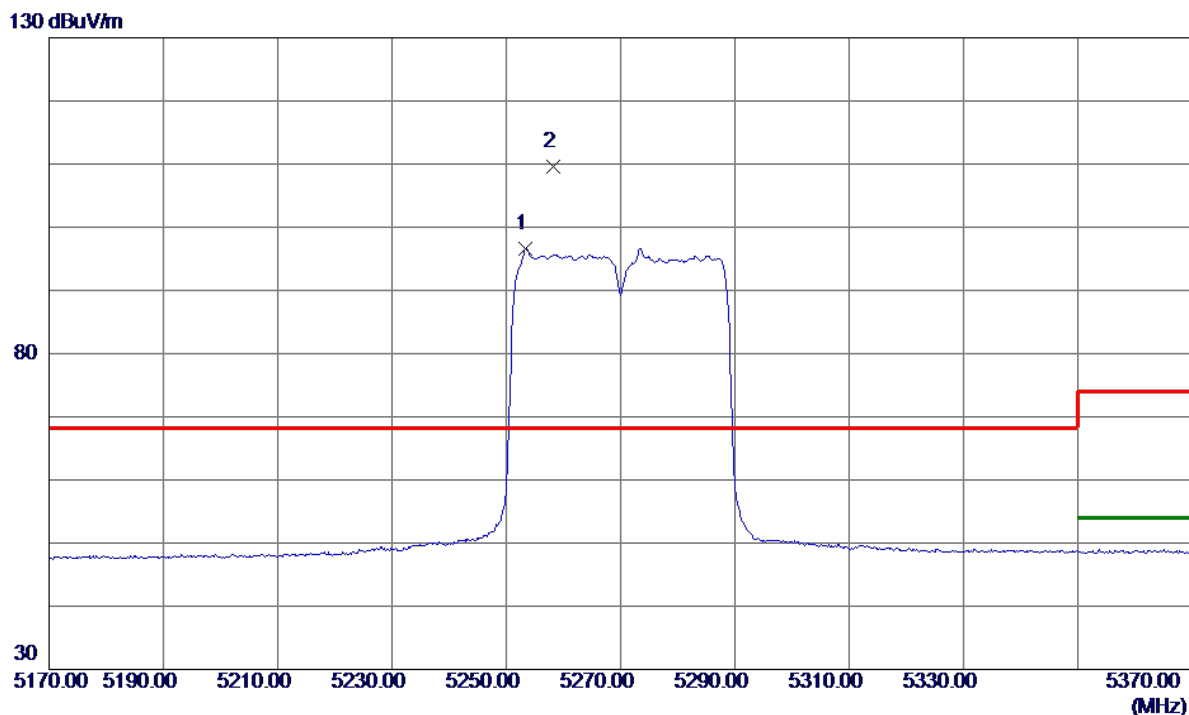

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5253.4000    | 81.15                      | 15.50                   | 96.65                     | 999.00          | -902.35      | AVG      | No Limit |
| 2 * | 5258.2000    | 94.17                      | 15.51                   | 109.68                    | 68.20           | 41.48        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.