

No.198 Kezhu Road, Science Town Economic& Technology  
Development District Guangzhou, China 510663  
Telephone: +86 (0) 20 8215 5555  
Fax: +86 (0) 20 8207 5059  
Email: sgs\_internet\_operations@sgs.com  
**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 556682

Report No.: SZEMO060400784AVF-2  
Page: 1 of 34  
FCC ID: G95RS2100A

# FCC TEST REPORT

**Application No.:** SZEMO060400784AV  
**Applicant:** Thomson Industry (Shenzhen) Co., Ltd.  
**Fundamental Frequency :** 2.401GHz to 2.470GHz  
**FCC ID:** G95RS2100A  
**Equipment under Test (EUT):**  
Name: audio system with 2.4G wireless\*  
Model: RS2100  
\* This report is only about the Remote controller of the audio system with 2.4G wireless.  
**Standards:** FCC PART 15, SUBPART C : 2006  
**Date of Receipt:** 25 April 2006  
**Date of Test:** 26 April to 14 June 2006  
**Date of Issue:** 15 June 2006

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.



Robinson Lo  
Laboratory Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf.  
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.  
This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.  
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.  
All test results in this report can be traceable to National or International Standards.



## 2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Number of hopping Frequency	FCC PART 15 2006	Section 15.247	PASS
Occupied Bandwidth	FCC PART 15 2006	Section 15.247 (a2)	PASS
Channel Separated	FCC PART 15 2006	Section 15.247(a)	PASS
Occupied Time	FCC PART 15 2006	Section 15.247(a1)	PASS
Band edge	FCC PART 15 2006	Section 15.247	PASS
Maximum Peak Output Power	FCC PART 15 :2006	Section 15.247 (b)	PASS
Radiated Emission (30MHz to 25GHz)	FCC PART 15 :2006	Section 15.107	PASS

The test result is only about the remote controller of the audio system with 2.4G wireless.



### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 CLIENT INFORMATION .....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 TEST LOCATION .....	6
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
4.6 TEST FACILITY .....	6
<b>5 TEST RESULTS</b> .....	<b>7</b>
5.1 TEST INSTRUMENTS .....	7
5.2 E.U.T. OPERATION .....	7
5.3 TEST PROCEDURE & MEASUREMENT DATA .....	8
5.3.1 <i>Number of Hopping Frequency</i> .....	8
5.3.2 <i>Pseudorandom Hopping Algorithm</i> .....	10
5.3.3 <i>Channel Separation</i> .....	11
5.3.4 <i>Occupied Bandwidth</i> .....	12
5.3.5 <i>Occupancy Time</i> .....	16
5.3.6 <i>Bandwidth of Frequency Band Edges</i> .....	19
5.3.7 <i>Radiated Emissions which fall in the restricted bands</i> .....	22
5.3.8 <i>Peak power Output</i> .....	25
5.3.9 <i>Spurious Emissions (Radiated)</i> .....	29-34

## 4 General Information


### 4.1 Client Information

Applicant: Thomson Industry (shenzhen) Co., Ltd.  
Address of Applicant: 2/F, Block B, Shen Fu Bao Science & Technology Industrial Group, 3 Huanghuai Road, Futian Bonded Zone, ShenZhen, PRC

### 4.2 Details of E.U.T.

Product Name: audio system with 2.4G wireless  
Model: RS2100  
Power Supply: 4.5DC(3\*1.5V batteries)

### 4.3 Description of Support Units

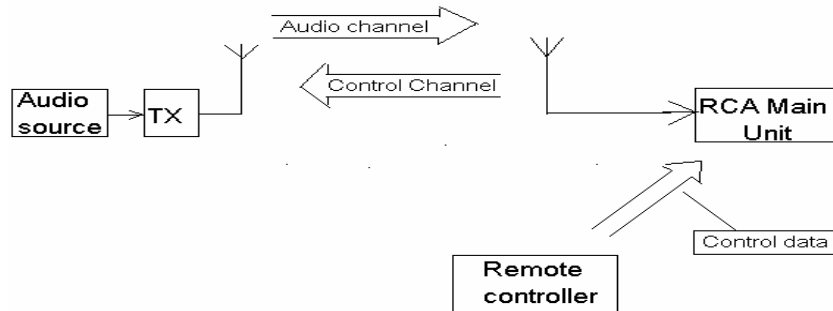

The MAIN UNIT(MU), USB DUNGLE(UD) and REMOTE CONTROLLER(RC) are a complete system. The system is based on wireless digital audio transfer from an audio source to MAIN UNIT, and REMOTE CONTROLLER can control MAIN UNIT by radio. It is noted that the communication between USB DUNGLE and MAIN UNIT are based on half-duplex transmission, MAIN UNIT and REMOTE CONTROLLER are based on simplex transmission.

The jack on the UD unit is connected with an audio source like CD player or MP3 player. The 3.5mm jack on the MU unit is connected with MP3 player. The jack on the MU unit is connected with the headphones.



Note:

1. All frequencies are in 2.404GHz to 2.478GHz for MU/UD, 2.401GHz to 2.470GHz for RC.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.  
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)

3. So all the items as

followed in testing report are need to test these three frequencies:

Top: Channel – 1; Middle: Channel – 38; Bottom: Channel – 75.

MU: MAIN UNIT

UB: USB DUNGLER

RC: REMOTE CONTROLLER



#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic & Technology Development District Guangzhou, China 510663

Tel: +86 20 8215 5555 Fax: +86 20 8207 5059

No tests were sub-contracted.

#### 4.5 Other Information Requested by the Customer

None.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**  
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through December 31, 2004.
- **ACA**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**  
The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively. Date of Registration: September 29, 2005. Valid until September 28, 2008.
- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**  
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 556682**  
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, Aug. 04, 2005
- **Industry Canada (IC)**  
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6002.

## 5 Test Results

### 5.1 Test Instruments

Item	Test Equipment	Manufacturer	Serial No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	SEL0017	28-04-2005	27-04-2007
2	EMI Test Receiver	Rohde & Schwarz	100249	22-09-2005	21-09-2006
3	EMI Test software	AUDIX	E3	N/A	N/A
4	Coaxial cable	SGS	SEL0028	20-05-2006	19-05-2007
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	00042673	03-03-2006	02-03-2007
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	2944A10861	26-08-2005	25-08-2006
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	00035926	30-12-2004	29-12-2006
8	Pre-amplifier (1-18GHz)	Rohde & Schwarz	1091457	29-07-2005	28-07-2007
9	Cable (0-18GHz)	MCE Mobile Communications	249439	20-05-2006	19-05-2007
9	Shielding Room	ZhongYu Electron	SEL0042	N/A	N/A
10	LISN	ETS-LINDGREN	00033512	19-09-2005	18-09-2006
11	EMI Test Receiver	Rohde & Schwarz	100119	03-03-2006	02-03-2007
12	Coaxial Cable	SGS	SEL0024	20-05-2006	19-05-2007

### 5.2 E.U.T. Operation

Input voltage: 4.5VDC(3\*1.5V batteries)

Operating Environment:

Temperature: 24.0 °C  
Humidity: 52 % RH  
Atmospheric Pressure: 1008 mbar



### 5.3 Test Procedure & Measurement Data

#### 5.3.1 Number of Hopping Frequency

Test Requirement: FCC Part15 C  
 Test Method: Based on FCC Part15 C Section 15.247:  
 Test Date: 09 June 2006  
 Operating Environment:  
 Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1012 Mbar  
 Test Results: PASS  
 Test Procedure:  
 1 The transmitter output was connected to the spectrum analyze directly.  
 2 Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz  
 3 The number of hopping frequency used is defined as the device has the numbers of total channel.

Requirement:  
 Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

Number of Hopping Frequency Channel	Limits Channel
75	15






\* RBW 100 kHz  
\* VBW 100 kHz  
\* SWT 500 ms

Ref 80 dBpW

\* Att 10 dB

1 PK  
VIEW

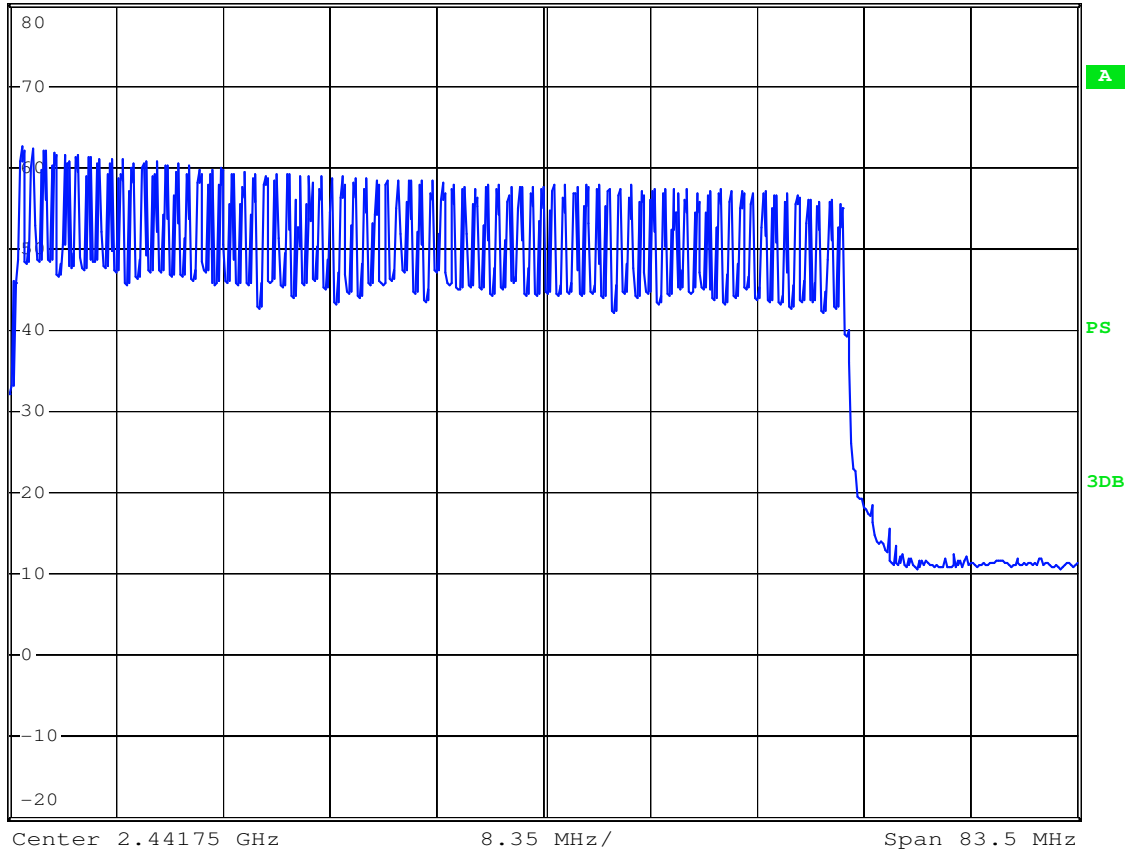

Date: 19.JUN.2006 14:44:19



5.3.2 Pseudorandom Hopping Algorithm

Test Requirement: FCC Part15.247(a)(1)  
Test Method: Based on FCC Part15 C Section 15.247:  
Test Date: 09 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1010 Mbar  
Test Results: PASS  
Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies.  
Each frequency must be used equally by transmitters

Base sequence hopping frequency locations


Hopping Frequency Location	Frequency /UDC* (GHz)	Hopping Frequency Location	Frequency /UDC* (GHz)	Hopping Frequency Location	Frequency /UDC* (GHz)
1	2.4075	26	2.4271	51	2.4224
2	2.4243	27	2.4122	52	2.4374
3	2.4047	28	2.4252	53	2.4672
4	2.4318	29	2.4010	54	2.4029
5	2.4019	30	2.4336	55	2.4308
6	2.4262	31	2.4364	56	2.4141
7	2.4299	32	2.4038	57	2.4691
8	2.4357	33	2.4681	58	2.4280
9	2.4131	34	2.4327	59	2.4066
10	2.4383	35	2.4057	60	2.4486
11	2.4392	36	2.4402	61	2.4348
12	2.4420	37	2.4290	62	2.4670
13	2.4495	38	2.4159	63	2.4411
14	2.4150	39	2.4476	64	2.4169
15	2.4504	40	2.4430	65	2.4448
16	2.4439	41	2.4094	66	2.4178
17	2.4085	42	2.4551	67	2.4560
18	2.4541	43	2.4456	68	2.4103
19	2.4196	44	2.4187	69	2.4616
20	2.4569	45	2.4523	70	2.4532
21	2.4700	46	2.4644	71	2.4206
22	2.4653	47	2.4113	72	2.4607
23	2.4514	48	2.4579	73	2.4625
24	2.4597	49	2.4467	74	2.4215
25	2.4635	50	2.4663	75	2.4588

### 5.3.3 Channel Separation

Test Requirement: FCC Part15 C  
 Test Method: Based on FCC Part15 C Section 15.247:  
 Test Date: 09 June 2006  
 Operating Environment:  
 Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1012 Mbar  
 Test Results: PASS

Requirements:  
 15.247 (a1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 KHz or the hopping channel, whichever is greater.  
 Or  
 Frequency hopping systems shall have hopping channel carrier frequencies channel, whichever is greater, provided the system operates with an output power no greater than 125mW

Measurement Data:  
 Channel Separation: 872 KHz

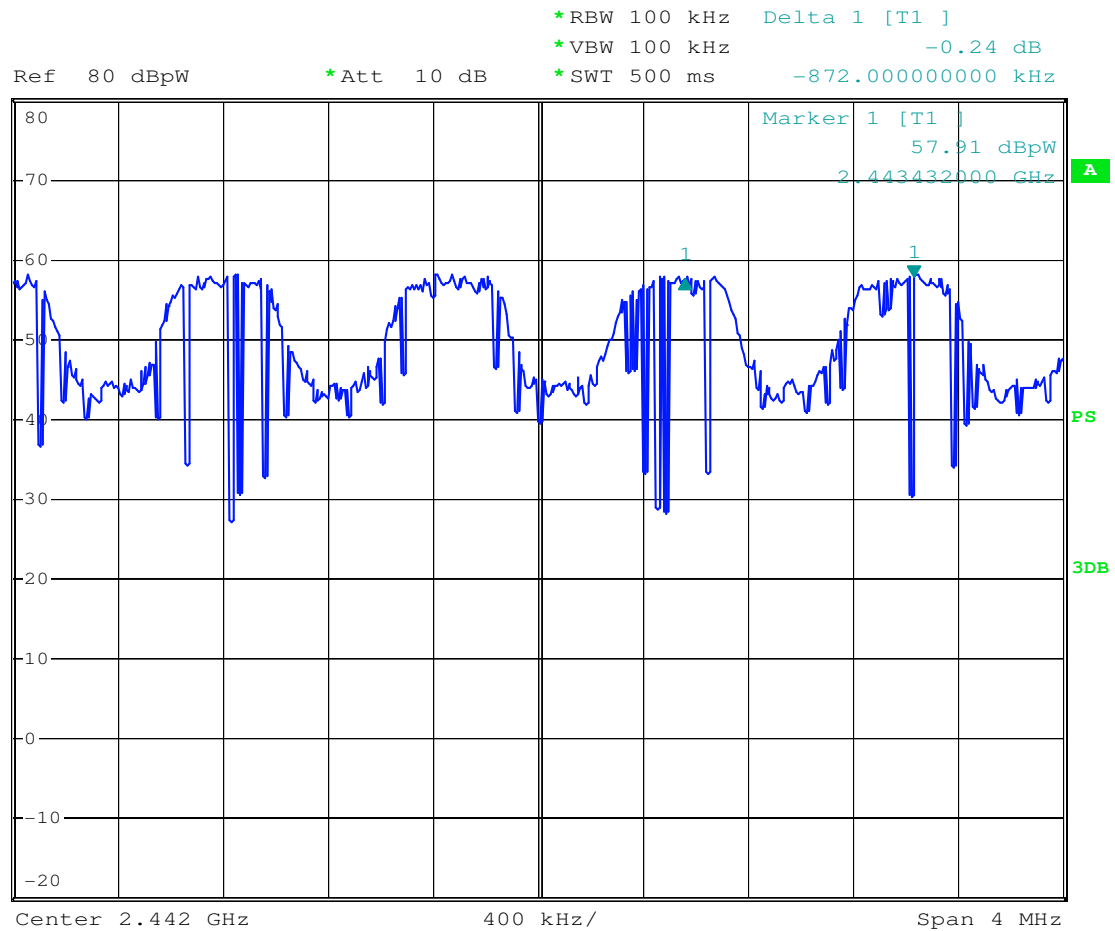

Date: 19.JUN.2006 14:35:04



### 5.3.4 Occupied Bandwith

Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 Section 15.15.247  
Test Date: 05 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1012 Mbar

Teat Results: PASS

Test Procedure:

- 1 The transmitter output was connected to the spectrum analyzer directly.
- 2 Set RBW of spectrum analyzer to 100k and VBW to 300K.
- 3 The Hopping Channel bandwidth is defined as the frequency range where the power is higher than peak power minus 20dB.

Requirments:


Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 non-overlapping channels. No requirements for bandwidth for this frequency band.

No requirements for Digital Transmitter.

Measurement Data: 75 RF channels are in use for RC  
The 75 defined channel(UDC) centre frequencies used by the RC is below. The values are in GHz.  
RC in Tx-mode:20dB Bandwidth of the hopping channel:1.2-1.27MH




RC 20dB bandwidth 2.401

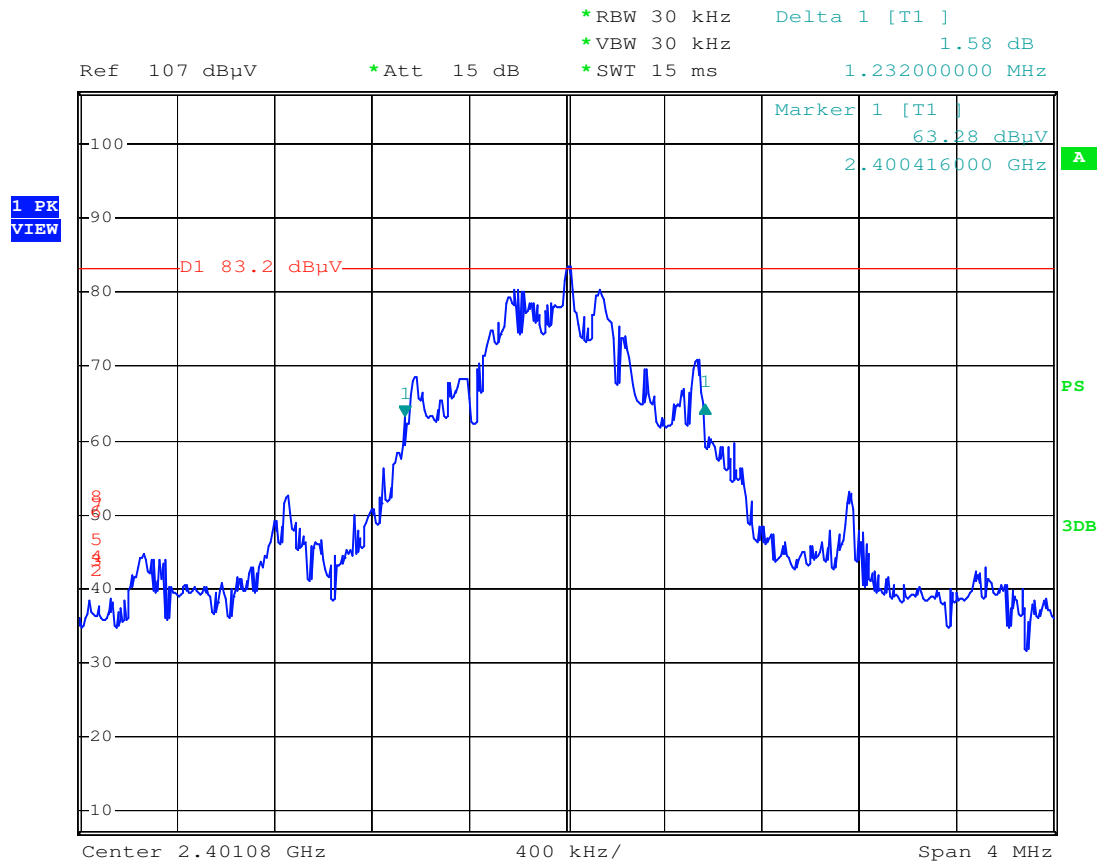

Date: 9.JUN.2006 13:24:03




RC 20dB bandwidth 2.4357

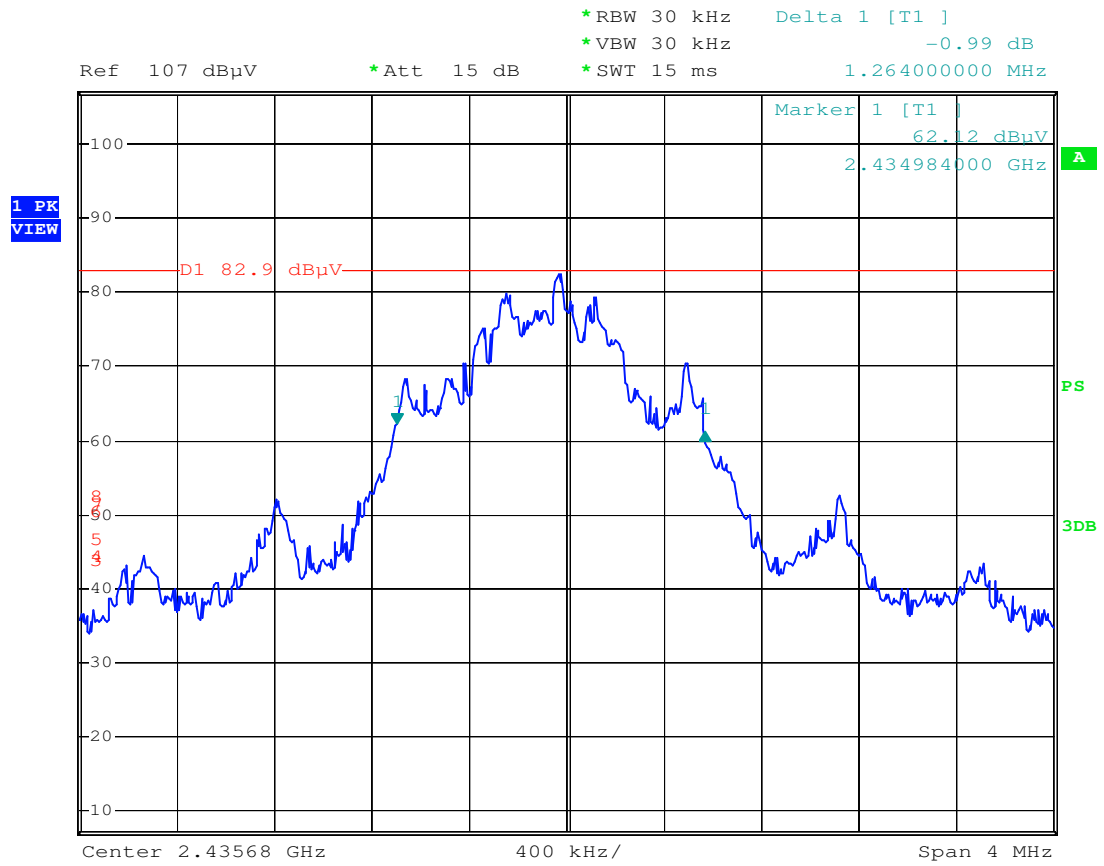

Date: 9.JUN.2006 13:28:43



RC 20dB bandwidth 2.4700

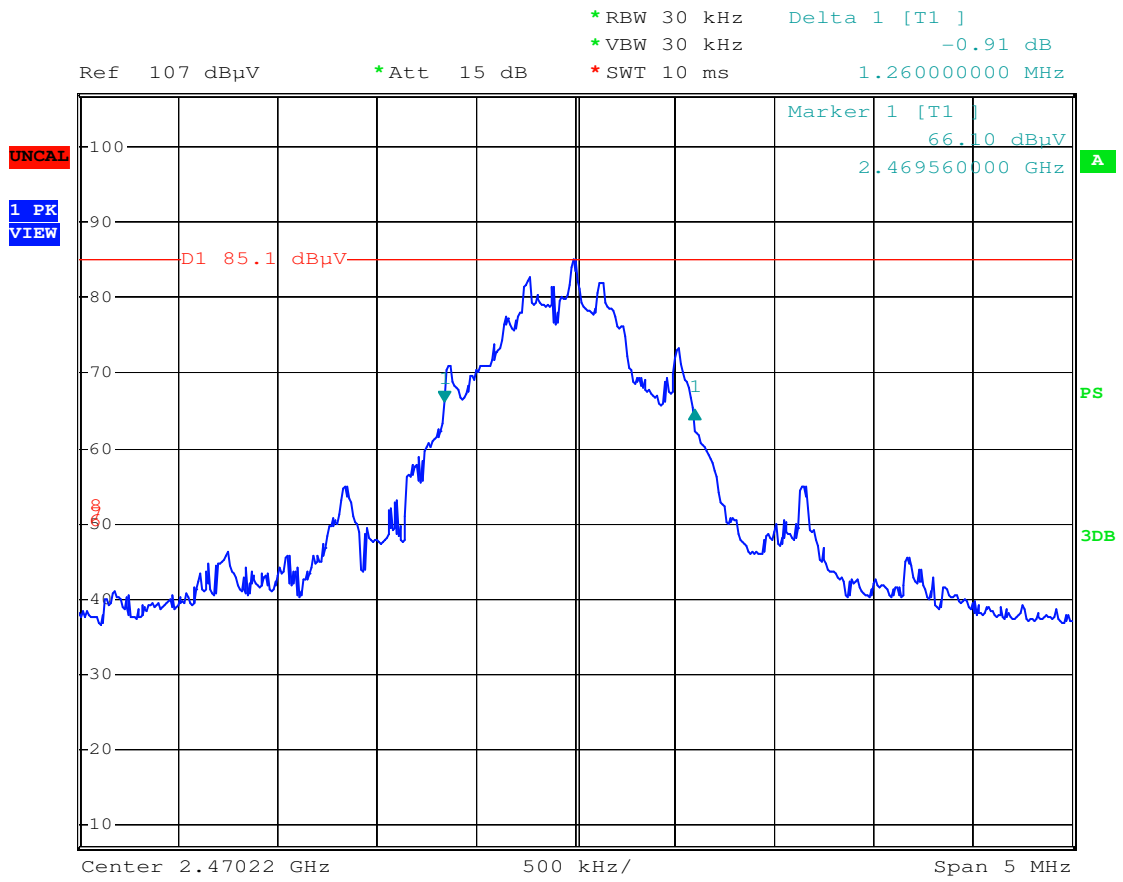

Date: 9.JUN.2006 13:20:20



**5.3.5 Occupancy Time**

Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 C Section 15.247.  
Test Date: 14 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1012 Mbar

Test result PASS

Test Procedure:

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
3. Set the center frequency would be measured and set frequency span to zero span.

Requirements:

The average time of occupancy on channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


Measurement Data:

RC Dwell time: 0.004S






RC Dwell Time

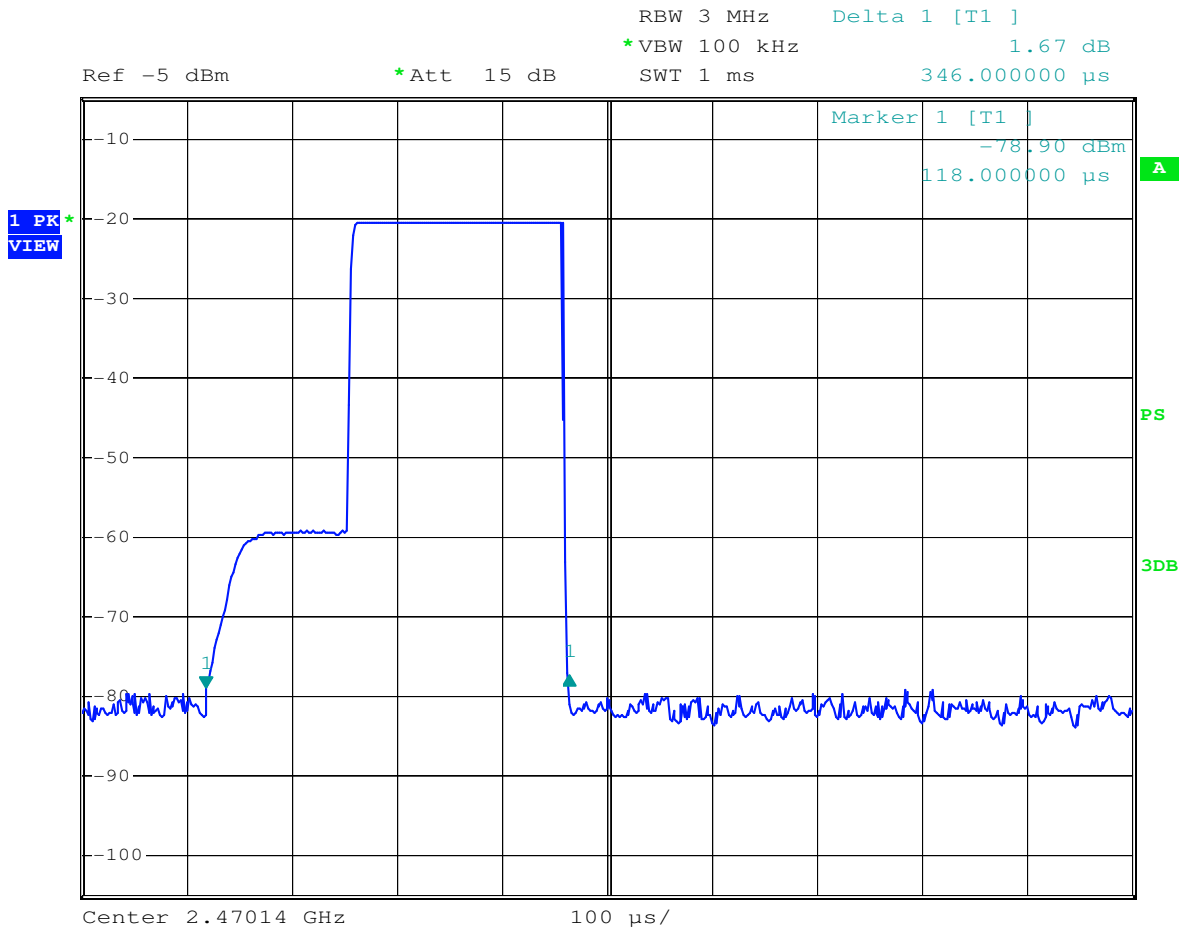

Date: 7.JUN.2006 16:13:38

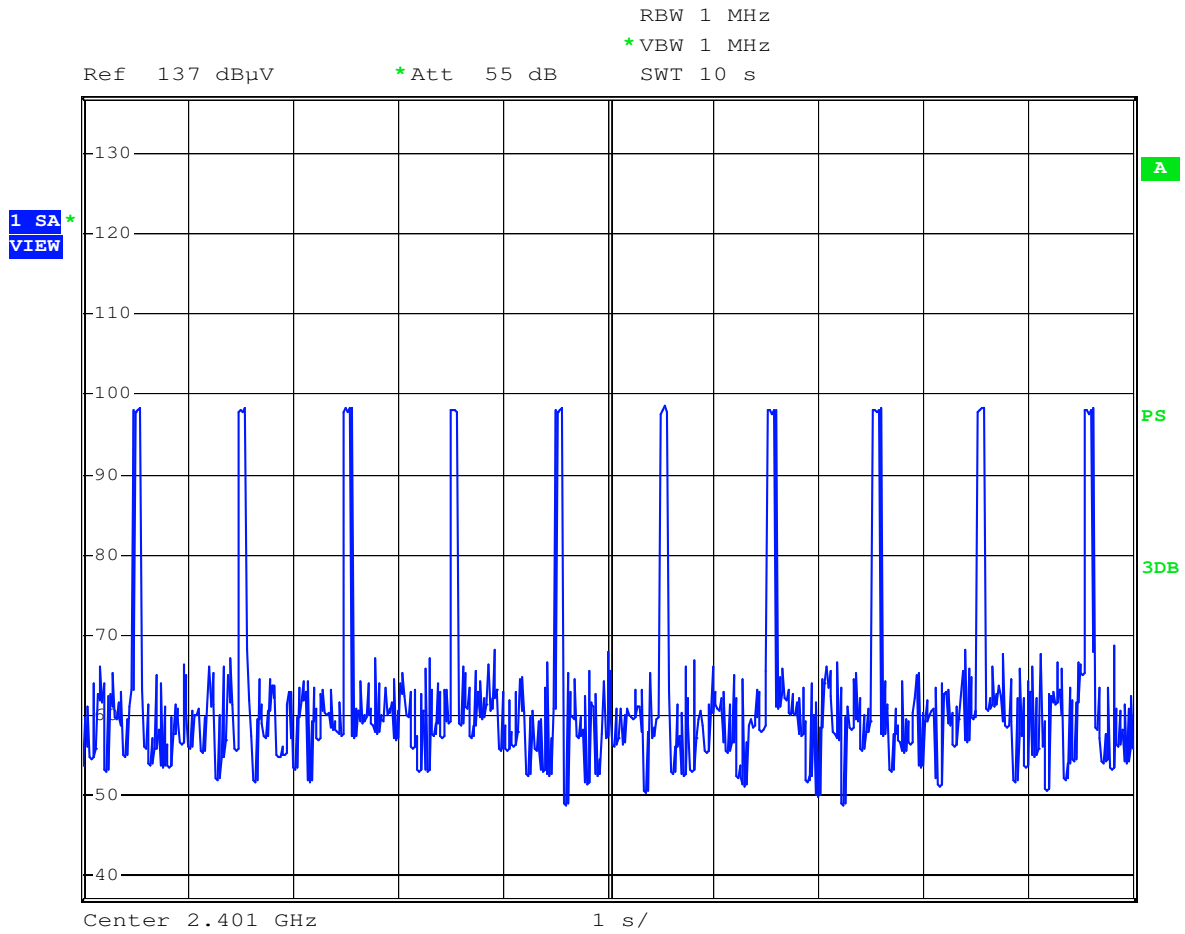

Date: 14.JUN.2006 18:35:29

\*\*Remark:

1. Dwell Time=Channel Number x 0.4(S) x average hopping channel x package transfer time.
2. Average Hopping Channel=hops/sweep time.



5.3.6 Bandwidth of Frequency Band Edges

Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 C Section 15.247.  
Test Date: 13 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1012 Mbar

- Test Procedure:
1. The transmitter output was connected to the spectrum analyzer via a low loss cable.
  2. Set both Rbw and VBW of spectrum analyzer to 100KHz with suitable frequency span including 100KHz bandwidth from band edge.
  3. The band edges was measured and recorded.


Test result: PASS  
Band-edge conducted power  
MU Tx-mode

Frequency GHz	Power below nearest channel, dB RF channel 2404/2478MHz, Frequencyhopping		Limit dB	Margin dB
2.4	Peak	57.44	74	16.56
	Average	37.44	54	16.56
2.4835	Peak	49.66	74	24.34
	Average	29.66	54	24.34

\*Remark: Measured: Peak-Average=-23dB But maxium duty cycle according to Para(b):-20Db




RC Band-edge field strength 2.4GHz

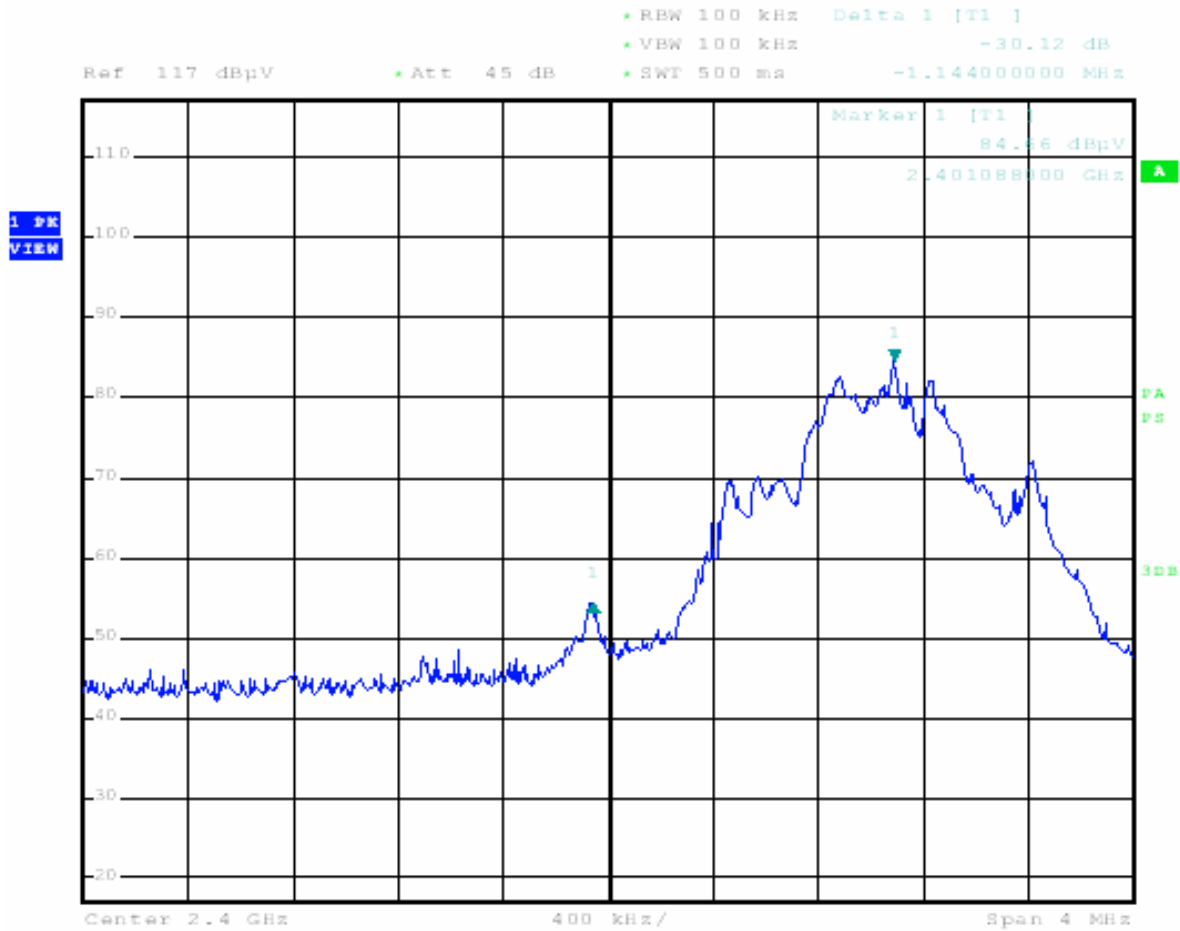

Date: 13.JUN.2006 18:06:18



MU Band-edge field strength 2.4835GHz

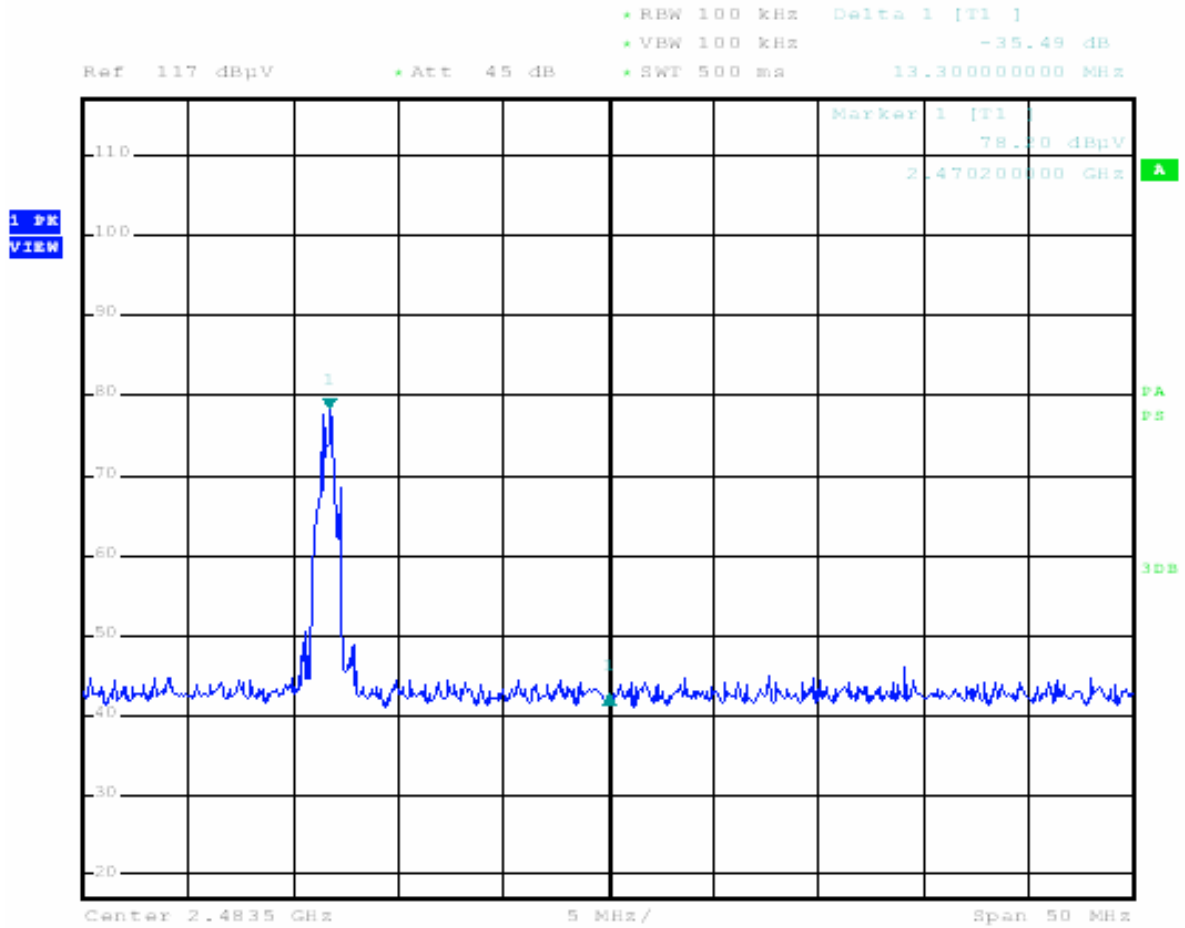

Date: 13.JUN.2006 18:14:05

**5.3.7 Radiated Emissions which fall in the restricted bands**

Test Requirement: Section 15.247 (c) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: Base on ANSI 63.4.


Test Date: 15 June 2006

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dB $\mu$ V/m between 30MHz & 88MHz  
43.5 dB $\mu$ V/m between 88MHz & 216MHz  
46.0 dB $\mu$ V/m between 216MHz & 960MHz  
54.0 dB $\mu$ V/m above 960MHz

Detector: Peak for pre-scan , 120kHz resolution bandwidth within 1GHz,  
1MHz resolution bandwidth above 1GHz

**Test Configuration:**

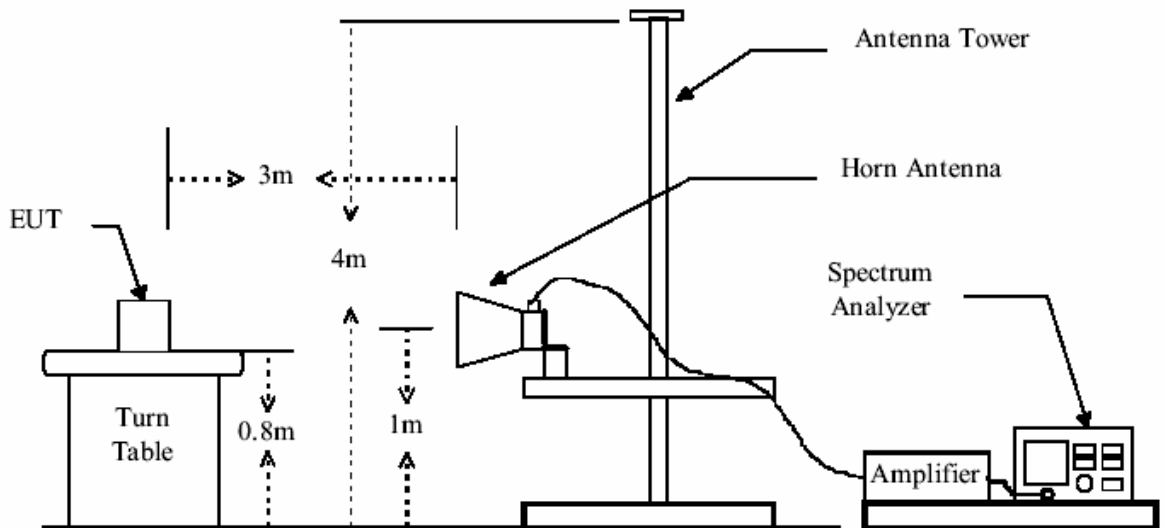

**Test Procedure:** The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

**Test Result:**

**1. Channel 1 ( 2.402GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	40.7	31.2	74.0	54.0	33.3	22.8
2483.500	41.3	32.9	74.0	54.0	32.7	21.1

**2. Channel 38 ( 2.435GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	40.4	30.8	74.0	54.0	33.6	23.2
2483.500	41.9	32.7	74.0	54.0	32.1	21.3

**3. Channel 75 ( 2.470GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	40.0	31.1	74.0	54.0	34.0	22.9
2483.500	41.6	33.5	74.0	54.0	32.4	20.5

**The unit does meet the FCC requirements.**



Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			





**5.3.8 Peak power Output**

Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 C Section 15.247.  
Test Date: 13 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1012 Mbar

Test result: PASS

Test Procedure:

- 1 The transmitter output was connected to the spectrum analyzer directly
- 2 The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW 3MHz and VBW to 3MHz.

Requirements:

The maximum peak output power shall not exceed the following limits:

For frequency hopping systems at least 75 hopping channels:1 Watt

For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 Watts

For Digital Thansmission Systems in the 2400-2483.5MHz band: 1Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB the directional gain of the antenna exceeds 6dBi.

Measurement Data:


Maximum Conducted Peak Power, mWatts

RC in mode

RF Channel	2401MHz	2435MHz	2470MHz
Measured value(dBm)	-23.69	-23.36	-25.45




RC Conducted peak power at 2401 MHz

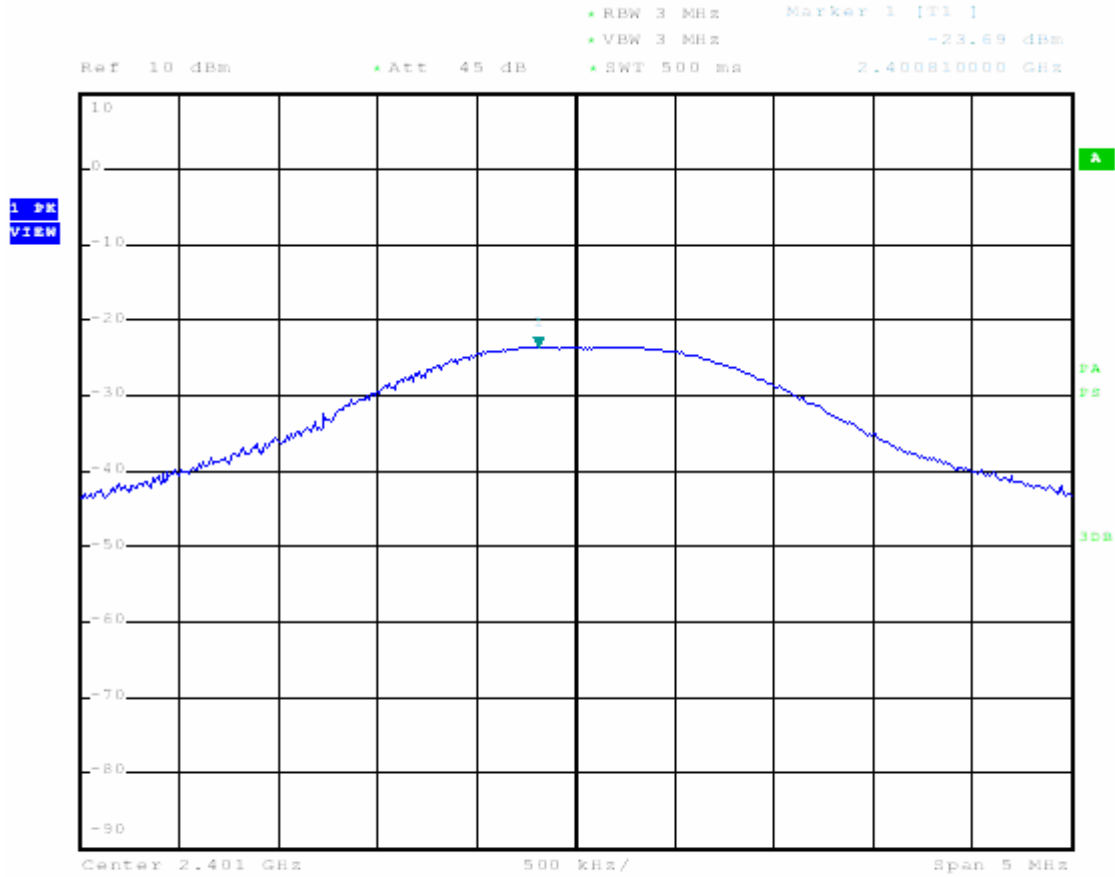

Date: 13.JUN.2006 18:11:02




RC Conducted peak power at 2435 MHz

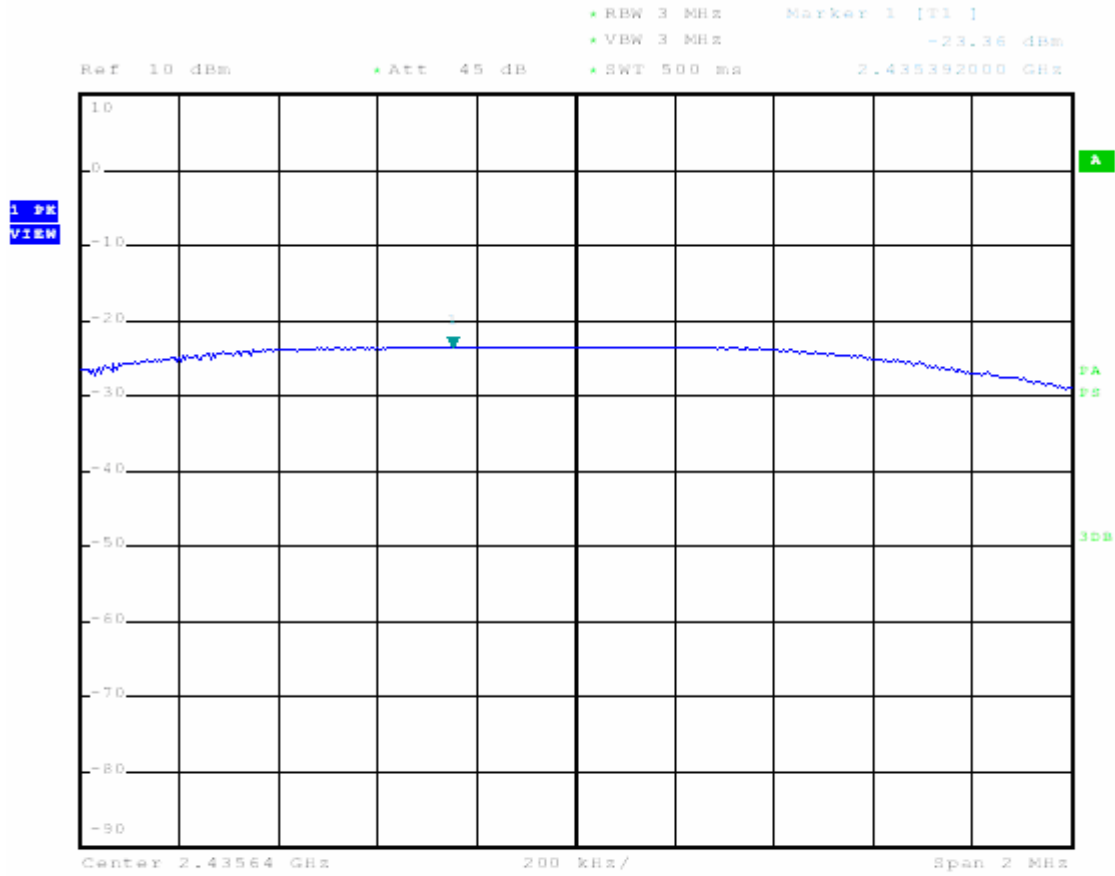

Date: 13.JUN.2006 18:08:13



RC Conducted peak power at 2470 MHz

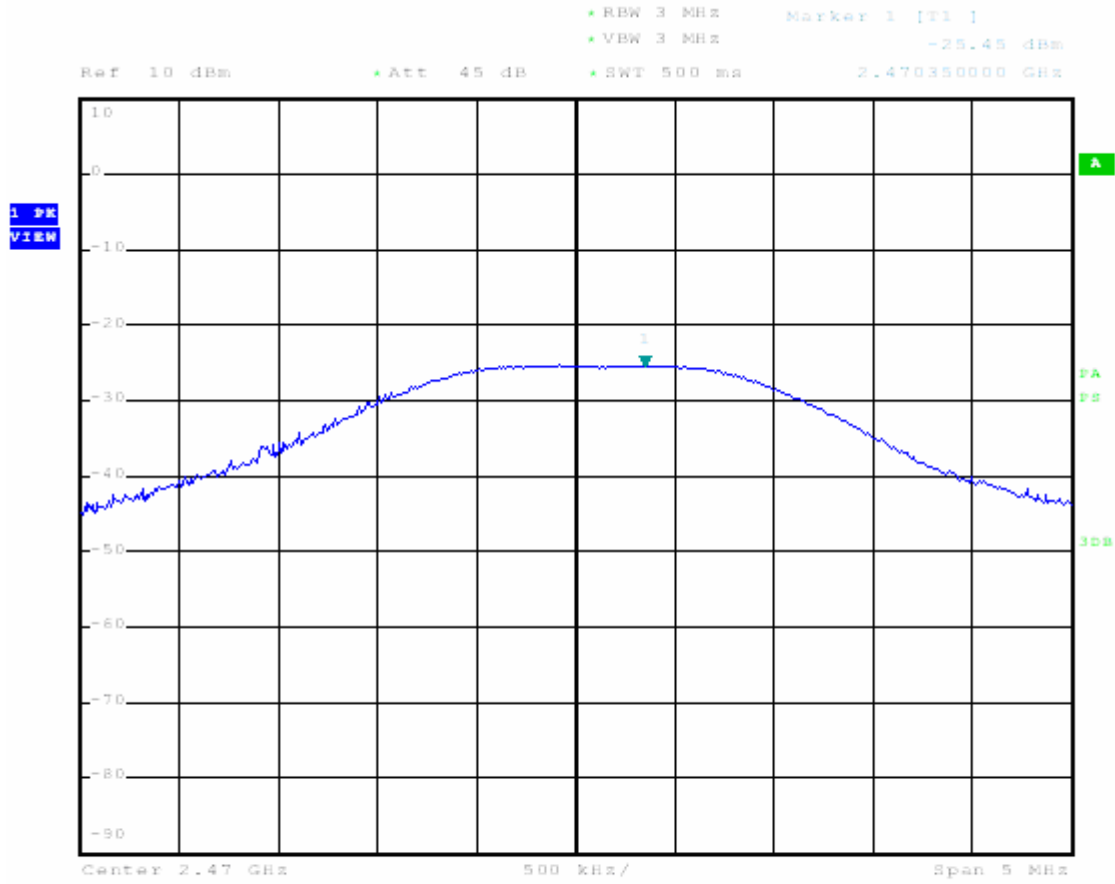

Date: 13.JUN.2006 18:09:17



**5.3.9 Spurious Emissions (Radiated)**

Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 C Section 15.247.  
Test Date: 05 June 2006  
Operating Environment:  
Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1012 Mbar

Requirements:

**Regulation 15.247 (C)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Test Procedures:**

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and Four meters above ground to find the maximum value of the field strength for both horizontal horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1m to 4m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3dB lower than average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. 30 MHz – 10GHz for transmitting mode. Test instrumentation resolution bandwidth 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 M – 25GHz)



**Test Result: Pass**

Please refer to the measurement graph and data.

Measurement Data:


Band-edge conducted power

**RC in Tx-mode**

Frequency	Power below nearest channel, dB	Limit	Margin
GHz	RF channel 2404/2478MHz, Frequencyhopping	dB	dB
2.4	-45.15	-20	25.15
2.4835	-61.80	-20	41.80




RC Band-edge field strength 2.4GHz

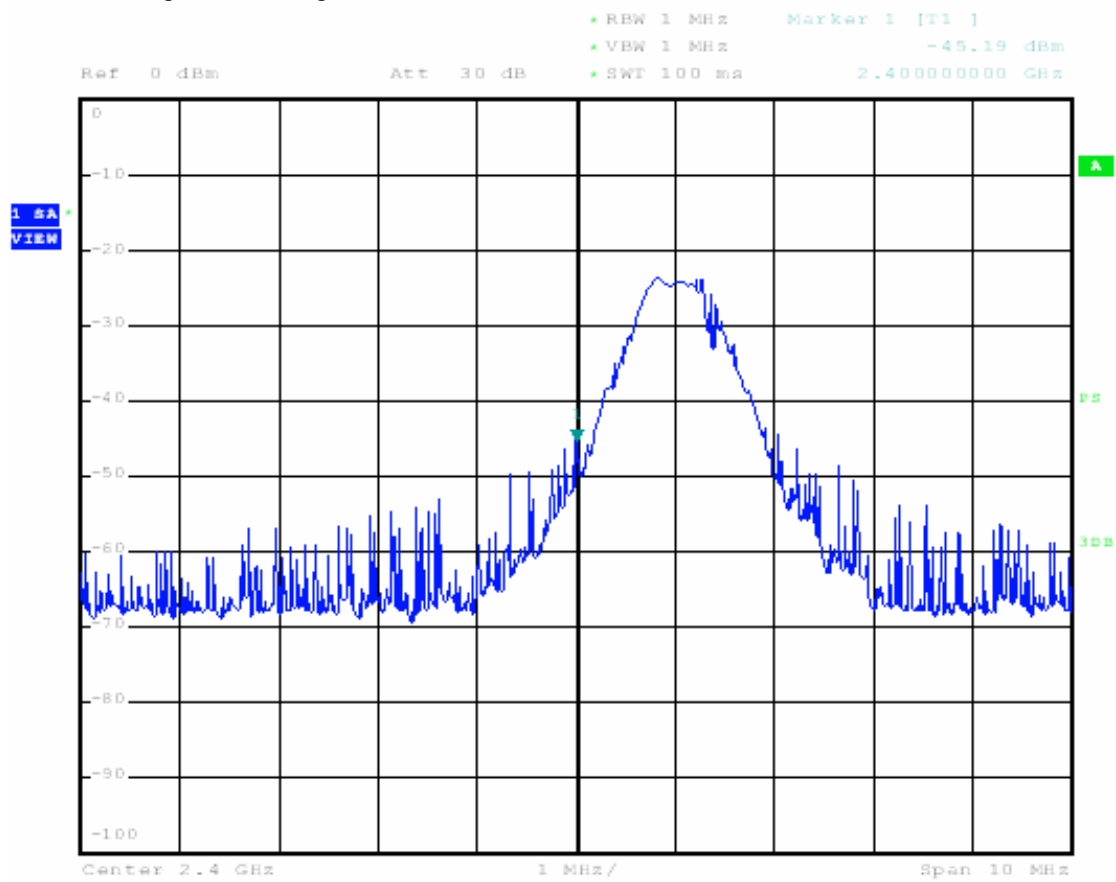

Date: 14.JUN.2006 10:41:44



RC Band-edge field strength 2.4835GHz

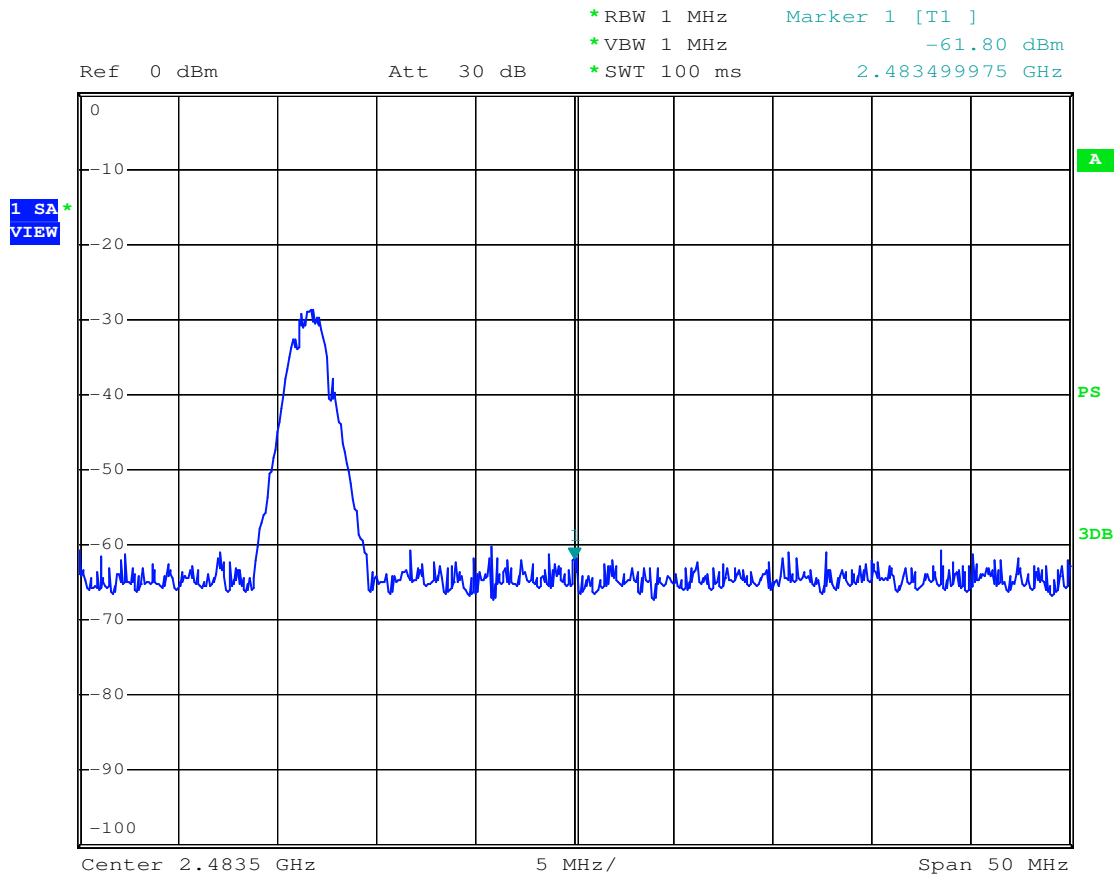

Date: 14.JUN.2006 10:43:58





Radiated Emission, 30MHz—25GHz

30MHz—18GHz measured at a distance of 3m, 18-25GHz measured by conducted.

\*Antenna factor, amplifier gain and cable loss are included in spectrum analyzer.

The following test results was performed on the RC at 30MHz-1000MHz.

Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
67.830	0.80	6.96	28.01	27.09	6.84	40.00	-33.16
102.750	1.21	8.97	27.85	25.29	7.62	43.50	-35.88
162.890	1.34	9.57	27.37	26.05	9.59	43.50	-33.91
288.020	1.85	13.40	26.76	26.64	15.13	46.00	-30.87
483.960	2.54	17.80	27.66	25.27	17.95	46.00	-28.05
628.490	2.76	20.51	27.52	25.88	21.63	46.00	-24.37

Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
70.740	0.83	6.97	28.00	27.22	7.02	40.00	-32.98
97.900	1.18	9.02	27.89	27.24	9.55	43.50	-33.95
151.250	1.32	9.07	27.45	25.87	8.81	43.50	-34.69
297.720	1.89	13.81	26.73	25.11	14.08	46.00	-31.92
444.190	2.39	16.77	27.55	26.88	18.49	46.00	-27.51
566.410	2.67	19.03	27.65	25.82	19.87	46.00	-26.13

The following test results were performed on the RC at above 1 GHz

RC at the Lowest Channel (2.401GHz)

Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
4802.507	2.70	34.04	45.40	39.70	31.04	54.00	-22.96
8310.000	3.30	36.00	43.40	37.83	33.73	54.00	-20.27
10775.000	3.62	38.10	42.43	38.92	38.21	54.00	-15.79
12968.000	3.94	39.20	44.53	38.09	36.70	54.00	-17.30
16385.000	4.34	41.15	43.91	38.84	40.42	54.00	-13.58

RC at the Middle Channel (2.435GHz)

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
4870.769	2.72	34.02	45.42	43.51	34.83	54.00	-19.17
6967.000	3.11	36.67	44.76	46.13	41.15	54.00	-12.85
8939.000	3.38	36.27	42.82	38.56	35.39	54.00	-18.61
11676.000	3.76	38.40	43.08	38.91	37.99	54.00	-16.01
15722.000	4.27	40.39	44.64	40.23	40.25	54.00	-13.75



RC at the Highest Channel (2.470GHz)

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pream p Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
4939.850	2.73	34.01	45.44	42.31	33.61	54.00	-20.39
8769.000	3.36	36.17	42.98	38.18	34.73	54.00	-19.27
10469.000	3.57	37.83	42.20	39.30	38.50	54.00	-15.50
12373.000	3.86	39.01	43.78	39.70	38.79	54.00	-15.21
15127.000	4.20	40.01	45.06	40.01	39.16	54.00	-14.84