

EXHIBIT B

Measurement Report

MEASUREMENT REPORT of CORDLESS TELEPHONE

Applicant : Thomson Consumer Electronics Inc. Audio &
Communications
Model : 2-911SSTC
EUT : 900 MHz S.S.T. Cordless Phone
FCC ID : G9H2-911SSTC
Report No. : K1215742

Test by :

Training Research Co., Ltd.

TEL : 886-2-27881332 FAX : 886-2-27857408

No. 5-3, Lane 21, Yen Chiu Yuan Rd., Sec. 4, Taipei, 11521 Taiwan R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by *Training Research Co., Ltd.*, No. 5-3, Lane 21, Yen-Chiu-Yuan Rd., Sec. 4, Taipei, 11521 Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.233.

Applicant : Thomson Consumer Electronics Inc. Audio & Communications
Model : 2-911SSTC
EUT : 900 MHz S.S.T. Cordless Phone
FCC ID : G9H2-911SSTC
Report No. : K1215742
Test Date : SEP. 11, 1998

Prepared by:


JACK TSAI

Approved by:

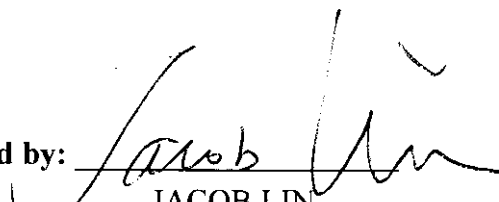
JACOB LIN

Test by :

Training Research Co., Ltd.

TEL: 886-2-27881332

FAX: 886-2-7857408

No. 5-3, Lane 21, Yen Chiu Yuan Rd., Sec. 4, Taipei, 11521 Taiwan R.O.C.

Tables of Contents

I. GENERAL	3
1.1 Introduction	3
1.2 Description of EUT	3
1.3 Description of Support Equipment	3
1.4 Configuration of System Under Test	4
1.5 Verify the frequency and channel	4
1.5.1 Verify the Frequency Pairs	4
1.6 Test Procedure	5
1.7 Location of the Test Site	5
1.8 General Test Condition	5
II. Section 15.207: Power line conducted emissions for AC powered units	6
2.1 Test Condition & Setup	6
2.2 List of Test Instruments	6
2.3 Test configuration	7
2.4 Test Result of Conducted Emissions	8
2.4.1 Base station transmit only	8
III. Section 15.247(a)(2): Bandwidth for direct sequence system.	13
3.1 Test Condition & Setup	13
3.2 Test Instruments Configuration	13
3.3 List of Test Instruments	13
3.4 Test Result of Bandwidth	14
IV. Section 15.247(a) (2) : Power Output	15
4.1 Test Condition & Setup	15
4.2 List of Test Instruments	16
4.3 Test Result of Fundamental Emission	17

V. Section 15.247©(2): Spurious emissions (Radiated)	18
5.1 Test Condition & Setup	18
5.2 List of Test Instruments	19
5.2.1 Duty Cycle Factor Measurement	19
5.3 Test Instruments Configuration	20
5.4 Test Result of Second Harmonic	22
5.5 Test Result of Spurious Radiated Emissions	23
5.5.1 Base and handset station transmit only	23
 VI. Section 15.247(d): Power spectral density.	 47
6.1 Test Condition & Setup	47
6.2 Test Instruments Configuration	47
6.3 List of Test Instruments	47
6.4 Required of Carrier Frequency	48
6.5 Test Result of Power spectral density	50
 VII. Section 15.247(e): Processing Gain.	 51
7.1 Test Condition & Setup	51
7.2 Test Instruments Configuration	53
7.3 List of Test Instruments	54
7.4 Test Procedure	54
7.5 Test Result of Processing Gain.	55
 Appendix A : Set Up Procedure	 57
Appendix B : Antenna Sketch	58
Appendix C : Part15.203	59
Appendix D : Security Code	60

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of Applicant in support of a Cordless Telephone certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

EUT : 900MHz S.S.T. Cordless Phone
Model : 2-911SSTC
FCC ID : G9H2-911SSTC
Frequency Range : Base : 902 - 928 MHz
Handset: 902 - 928 MHz
Support Channel : 20 Channel
Modulation Skill : TDMA / Spread spectrum
Security Code : 12-bit P/N code, 8-bit scramble, 16-bit 2D
Power Type : Base Powered by 120 Vac 60 Hz / 3 Vdc 600 mA
Handset powered by 3.6 V / 720 mAh.
Power Cord : Nonshielded
Phone Line : RJ-11C => Nonshielded, 7' long, Plastic hoods, No bead
Applicant : Thomson Consumer Electronics Inc. Audio &
Communications
Product develop. 101 West 103 Rd. Street, Indianapolis,
IN 46290, U.S.A.

1.3 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PSTN Simulator: King Design Public Switched Telephone Network Simulator
Model No. : 8705-A
Serial No. : N/A
Notebook : CER Notebook
Model No. : 386SL
Serial No. : 001855
Power Type: Linear
Power Core: unshielded, 6' long, Plastic hoods, No ferrite bead
FCC ID : Q8V486S

1.4 Configuration of System Under Test

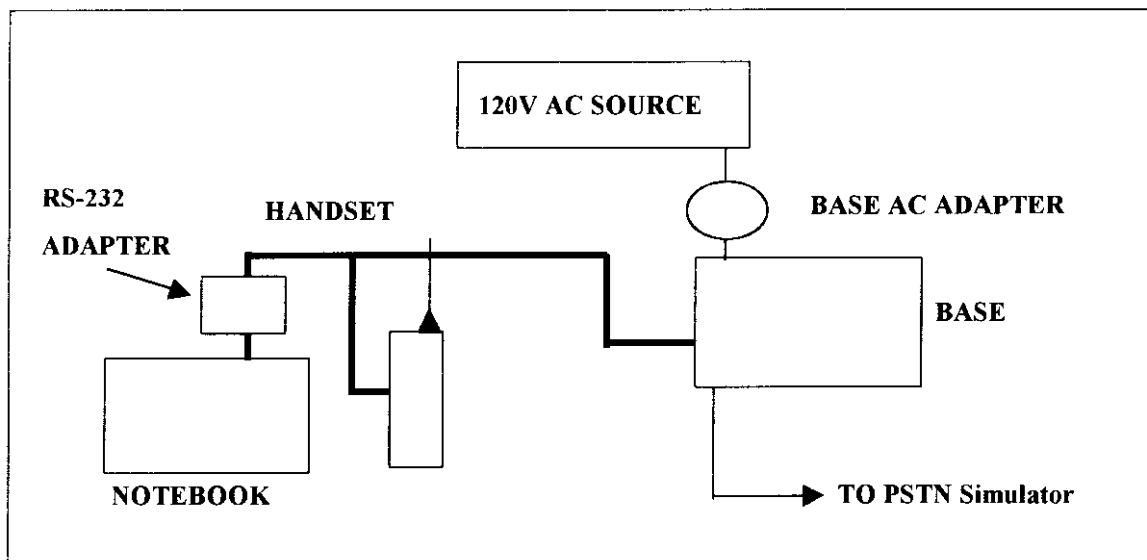


Fig. 1 Configuration of system under test

The tests below are run with the DCT transmitter set at high power in TDD mode. A serial port from a computer to the DCT UUT is needed to force selection of output power level and channel number.

The setting up procedure was recorded in Appendix A.

1.5 Verify the frequency and channel

1.5.1 Verify the Frequency Pairs

Channel	Base (MHz)	Handset (MHz)	Channel	Base (MHz)	Handset (MHz)
1	904.33800	904.28700	11	915.60859	915.59969
2	905.43100	905.42800	12	916.78849	916.80297
3	906.42345	906.49008	13	918.04680	918.04989
4	907.39980	907.39802	14	919.25862	919.26188
5	908.43390	908.42859	15	920.39998	920.39898
6	909.59996	909.59897	16	921.59899	921.61848
7	910.81590	910.79886	17	922.80084	922.80012
8	912.00890	912.01848	18	924.00848	924.00688
9	913.21990	913.20849	19	925.18888	925.18898
10	914.62500	914.62500	20	926.16300	926.16300

Note:

1. This is for sure that all frequencies are in 902 MHz to 928 MHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz. (The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 903 MHz to 927 MHz. So all the items as followed in testing report are need to test these three frequencies: top: channel 1, middle: channel 10, bottom: channel 20.

1.6 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on Appendix A, the detail setup was written on each test item.

1.7 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the three-meter, open-field test site maintained by Training Research Co., Ltd. No. 5-3, Lane 21, Yen-Chiu-Yuan Rd., Sec. 4, Taipei, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a shielded enclosure also located at Training Research Co., Ltd. 1F, No. 569, Chung Hsiao E. Sec. 7, Taipei, Taiwan, R.O.C. Training Research Co., Ltd. is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.

In test , the base and handset are tested separately. They were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch10 and ch20 of base and handset were all tested .The setting up procedure is recorded on Appendix A.

II. Section 15.207: Power line conducted emissions for AC powered units

2.1 Test Condition & Setup

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4. There are three test conditions apply in this test item, the test procedure description as the following.

1. Base station transmit only.
Using the RS-232 port of notebook and Rockwell software to control the base, handset.
Then making access to the mode of continuous transmission. Three channel is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).
2. Idle state (handset park, on hook mode)

The setting up procedure is recorded on Appendix A.

2.2 List of Test Instruments

Manufacturer	Device	Model	Input impedance
Hewlett Packard	100Hz-1.5GHz Spectrum Analyzer	HP8591EM	50.00
EMCO	Line Impedance Stabilization Network	3825/2	50.00
TRC	Shielded Room	TRC-SRI	N/A

2.4 Test Result of Conducted Emissions

2.4.1 Base station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the HOT and NATURAL conductors of the EUT power cord.

Model No. : 2-911SSTC
EUT : 900MHz S.S.T. Cordless Phone

Table 1 Power Line Conducted Emissions (Channel 1)

Power Conductor	Connected Frequency (KHz)	Emissions Peak Amplitude (dBuV)	FCC Limit (dBuV)	Class B Margin (dB)
Line 1	480.00	27.94	48.00	-20.06
	754.00	21.94	48.00	-26.06
	783.00	21.28	48.00	-26.72
	818.00	22.33	48.00	-25.67
	1034.00	30.68	48.00	-17.32
	1063.00	23.27	48.00	-24.73
	1135.00	25.11	48.00	-22.89
	1156.00	22.55	48.00	-25.45
	1257.00	21.49	48.00	-26.51
	24120.00	23.86	48.00	-24.14
LINE 2	701.00	20.38	48.00	-27.62
	788.00	21.37	48.00	-26.63
	966.00	27.53	48.00	-20.47
	1027.00	32.59	48.00	-15.41
	1063.00	21.38	48.00	-26.62
	1120.00	28.99	48.00	-19.01
	1163.00	25.55	48.00	-22.45
	1257.00	21.85	48.00	-26.15
	1564.00	24.84	48.00	-23.16
	24120.00	23.32	48.00	-24.68

NOTE:

1. Margin = Peak Amplitude - Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

Table 2 Power Line Conducted Emissions (Channel 10)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	684.00	21.17	48.00	-26.83
	773.00	23.51	48.00	-24.49
	788.00	21.37	48.00	-26.63
	1021.00	31.48	48.00	-16.52
	1063.00	21.74	48.00	-26.26
	1120.00	24.80	48.00	-23.20
	1156.00	23.08	48.00	-24.92
	2440.00	29.63	48.00	-18.37
	2610.00	24.75	48.00	-23.25
	24120.00	23.70	48.00	-24.30
LINE 2	615.00	24.07	48.00	-23.93
	916.00	22.58	48.00	-25.42
	941.00	29.76	48.00	-18.24
	1027.00	29.01	48.00	-18.99
	1063.00	22.43	48.00	-25.57
	1120.00	23.02	48.00	-24.98
	1215.00	27.81	48.00	-20.19
	2040.00	30.21	48.00	-17.79
	3810.00	21.58	48.00	-26.42
	24120.00	21.79	48.00	-26.21

NOTE:

1. Margin = Peak Amplitude - Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

Table 3 Power Line Conducted Emissions (Channel 20)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	684.00	21.77	48.00	-26.23
	709.00	25.87	48.00	-22.13
	764.00	24.34	48.00	-23.66
	823.00	20.51	48.00	-27.49
	1034.00	31.21	48.00	-16.79
	1063.00	23.33	48.00	-24.67
	1120.00	25.34	48.00	-22.66
	1257.00	21.44	48.00	-26.56

LINE 2	684.00	21.86	48.00	-26.14
	818.00	23.28	48.00	-24.72
	1021.00	31.87	48.00	-16.13
	1063.00	23.71	48.00	-24.29
	1120.00	24.75	48.00	-23.25
	1156.00	22.11	48.00	-25.89
	1207.00	39.17	48.00	-8.83
	1257.00	22.49	48.00	-25.51
	1332.00	29.38	48.00	-18.62
	26910.00	21.81	48.00	-26.19

NOTE:

1. Margin = Peak Amplitude- Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

Table 4 Power Line Conducted Emissions (CHARGING)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBUV)	Limit (dBUV)	Margin (dB)
Line 1	637.00	26.72	48.00	-21.28
	729.00	25.80	48.00	-22.20
	764.00	24.09	48.00	-23.91
	783.00	22.86	48.00	-25.14
	1034.00	32.73	48.00	-15.27
	1063.00	41.59	48.00	-6.41
	1120.00	26.45	48.00	-21.55
	3190.00	26.15	48.00	-21.85
	3700.00	23.16	48.00	-24.84
	24120.00	23.58	48.00	-24.42
LINE 2	701.00	21.65	48.00	-26.35
	759.00	21.80	48.00	-26.20
	803.00	40.09	48.00	-7.91
	1027.00	31.30	48.00	-16.70
	1077.00	32.10	48.00	-15.90
	1120.00	25.69	48.00	-22.31
	1156.00	22.80	48.00	-25.20
	1257.00	21.53	48.00	-26.47
	2180.00	32.08	48.00	-15.92
	24120.00	20.86	48.00	-27.14

NOTE:

1. Margin = Peak Amplitude - Limit.
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

Table 5 Power Line Conducted Emissions (PAGING)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	684.00	23.43	48.00	-24.57
	764.00	23.37	48.00	-24.63
	793.00	21.76	48.00	-26.24
	1021.00	29.46	48.00	-18.54
	1063.00	20.65	48.00	-27.35
	1120.00	26.99	48.00	-21.01
	1257.00	20.49	48.00	-27.51
	1439.00	28.49	48.00	-19.51
	1909.00	24.52	48.00	-23.48
	24120.00	24.40	48.00	-23.60
LINE 2	571.00	22.65	48.00	-25.35
	680.00	21.29	48.00	-26.71
	692.00	20.45	48.00	-27.55
	714.00	20.09	48.00	-27.91
	818.00	21.99	48.00	-26.01
	960.00	26.29	48.00	-21.71
	1027.00	28.02	48.00	-19.98
	1063.00	20.75	48.00	-27.25
	1135.00	24.69	48.00	-23.31
	24120.00	23.13	48.00	-24.87

NOTE:

3. Margin = Peak Amplitude - Limit.
4. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

III. Section 15.247(a)(2): Bandwidth for direct sequence system.


3.1 Test Condition & Setup

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height. The EUT was set to transmit continuously. Various channels were also investigated to find the maximum occupied bandwidth. The minimum 6 dB bandwidth shall be at least 500 KHz.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Set the span>> RBW. The detector function was set to peak and hold mode to clearly observe the components.

Setting up procedure is written on Appendix A.

3.2 Test Instruments Configuration

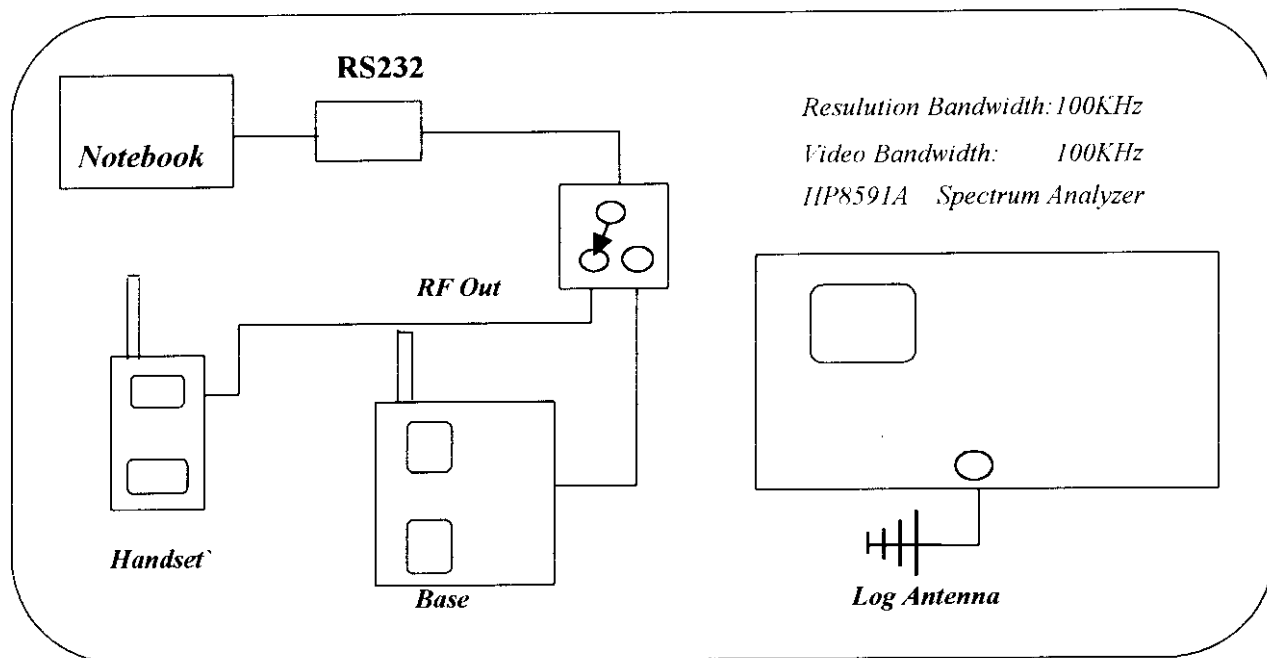

P.S.A serial port from notebook computer to control the EUT at maximal power output and channel Number.

Fig 10. Test Configuration of bandwidth for direct sequence system

3.3 List of Test Instruments

Manufacturer	Device	Model	Input	Impedance
Hewlett Packard	0.9KHz – 40 GHz Spectrum Analyzer	HP8591A	50.00	
EMCO	Log-Antenna	3146	50.00	

3.4 Test Result of Bandwidth

Bandwidth of Channel 1

Bandwidth of Base : 1.58 MHz

Bandwidth of Handset : 1.65 MHz

The min. 6 dB BW at least : 500 KHz

Bandwidth of Channel 10

Bandwidth of Base : 1.63 MHz

Bandwidth of Handset : 1.68 MHz

The min. 6 dB BW at least : 500 KHz

Bandwidth of Channel 20

Bandwidth of Base : 1.63 MHz

Bandwidth of Handset : 1.65 MHz

The min. 6 dB BW at least : 500 KHz

Note:

1. The data in the above table are summarize the following attachment spectrum analyzer hard copy.
2. The attachment follow by this page and there is no page number.

19:05:56 SEP 11, 1998

B\S CH01

REF .0 dBm

ATTEN 10 dB

MKR Δ -1.05 MHz

-6.20 dB

PEAK
LOG
10
dB/VA SB
SC FC
CORRMARKER Δ
-1.05 MHz
-6.20 dBCENTER 904.65 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msecCLEAR
WRITE AMAX
HOLD A

VIEW A

BLANK A

TRACE
A B CMORE
1 of 3

19:06:26 SEP 11, 1998

B\S CH01

REF .0 dBm

ATTEN 10 dB

MKR Δ 1.58 MHz

-.51 dB

PEAK
LOG
10
dB/VA SB
SC FC
CORRMARKER Δ
1.58 MHz
-.51 dBCENTER 904.65 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msecMARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2

19:26:18 SEP 11, 1998

H\S CH01

REF .0 dBm

ATTEN 10 dB

MKR Δ 1.10 MHz

-6.41 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORR

CENTER 904.07 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

19:26:39 SEP 11, 1998

H\S CH01

REF .0 dBm

ATTEN 10 dB

MKR Δ -1.65 MHz

-.87 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORR

CENTER 904.07 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

18:59:57 SEP 11, 1998

B\S CH10

REF .0 dBm

ATTEN 10 dB

-6.32 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMARKER Δ
1.23 MHz
-6.32 dBMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORRCENTER 914.12 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

19:00:25 SEP 11, 1998

B\S CH10

REF .0 dBm

ATTEN 10 dB

MKR Δ -1.63 MHz

-.49 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMARKER Δ
-1.63 MHz
-.49 dBMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORRCENTER 914.12 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

19:45:39 SEP 11, 1998

H\S CH10

REF .0 dBm ATTEN 10 dB

-6.85 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2A SB
C FC
CORRCENTER 914.12 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

19:46:11 SEP 11, 1998

H\S CH10

REF .0 dBm ATTEN 10 dB

MKR Δ -1.68 MHz
-1.32 dBPEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2A SB
C FC
CORRENTER 914.12 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

18:55:11 SEP 11, 1998

B\S CH20

REF .0 dBm

ATTEN 10 dB

MKR Δ -1.08 MHz

-6.36 dB

MARKER
NORMALPEAK
LOG
10
dB/MARKER Δ
-1.08 MHz
-6.36 dBMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORRCENTER 926.22 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

18:55:46 SEP 11, 1998

B\S CH20

REF .0 dBm

ATTEN 10 dB

MKR Δ 1.63 MHz

-.64 dB

MARKER
NORMALPEAK
LOG
10
dB/MARKER Δ
1.63 MHz
-.64 dBMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORRCENTER 926.22 MHz
#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 20 msec

19:42:51 SEP 11, 1998

H\S CH20

REF .0 dBm

ATTEN 10 dB

MKR Δ 1.10 MHz

-6.69 dB

PEAK
LOG
10
dB/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORR

CENTER 926.20 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

19:43:38 SEP 11, 1998

H\S CH20

REF .0 dBm

ATTEN 10 dB

MKR Δ -1.65 MHz

-.43 dB

EAK
OG
0
B/MARKER
NORMALMARKER
DELTAMKR CNT
ON OFFMKNOISE
ON OFFMARKERS
OFFMORE
1 of 2VA SB
SC FC
CORR

CENTER 926.20 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

IV. Section 15.247(B): Power Output

4.1 Test Condition & Setup

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591A Spectrum Analyzer, EMCO Biconical Antenna (Model 3110) for 30 - 200 MHz, EMCO Log-Periodic Antenna (Model 3146) for 200 - 1000 MHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. The spectrum analyzer HP8568b used on this testing for frequency 30MHz to 1000MHz. No post-detector video filters were used in the test. Set the RB= 3 MHz, VB = 3MHz and the span = 5 MHz. The analyzer was operated in the maximum hold mode.

There are two test condition apply in this test item, the test procedure description as the following:

(1) Base and handset station transmit only:

Using the RS-232 port of notebook and Rockwell software to control the base, handset. Then making access to the mode of continuous transmission. Three channel is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).

With the transmitter operating from a fully charged battery and using the internal antenna.

Radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to low, mid and high channels in the 902-928 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.

4.2 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	100Hz-1.5GHz Spectrum Analyze	HP8568B	50.00
Hewlett Packard	50kHz-22GHz Spectrum Analyzer	HP8592B	50.00
Hewlett Packard	10KHz-1GHz Quasi-peak Adapte	HP85650A	50.00
Hewlett Packard	20Hz-2GHz RF Preselector	HP85685A	50.00
Anritsu	0.1-1200MHz Preamplifier	MH648A	50.00
EMCO	20-300MHz Biconical Antenna	3110.00	50.00
EMCO	200-1000MHz Log-Periodic Antenna	3146.00	50.00
TRC	Open Field Test Site	TRC-OFTS1	N/A
TRC	Notch Filter	N/A	50.00

4.3 Test Result of Fundamental Emissions

The peak values of fundamental emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Model No. : 2-911SSTC

EUT : 900MHz S.S.T. Cordless Phone

Table 6 Open Field Fundamental Emissions

Channel	Frequency (MHz)	A.P. (H/V)	A.H. (CM)	Table (degree)	Amplitude (Peak) (dBuV/m)	E.R.P.(Peak)	
						mW	dBm
Base 01	904.338	H	100.00	146	101.06	3.828	5.830
		V	100.00	244	107.69	17.620	12.460
Base 10	914.625	H	100.00	15	100.45	3.327	5.220
		V	100.00	85	107.97	18.798	12.740
Base 20	926.163	H	100.00	291	99.35	2.583	4.120
		V	100.00	318	107.67	17.544	12.440
Handset 01	904.287	H	100.00	155	95.42	1.045	0.191
		V	100.00	23	105.10	9.708	9.871
Handset 10	914.625	H	100.00	129	93.58	0.684	-1.648
		V	100.00	58	106.37	13.005	11.14
Handset 20	926.013	H	100.00	135	94.20	0.789	-1.028
		V	100.00	197	104.28	8.037	9.051

Note:

1. A.P. means antenna polarization, horizontal and vertical.
2. A.H. means antenna height.
3. Table means turntable turning position.
4. Amplitude means the fundamental emission measured.
5. Effective Radiation Power (E.R.P.) = $(E d)^2 / 30G$

E is the measured maximum field strength in V/m utilizing the maximum hold mode RBW (3MHz).

G is the numeric gain of the transmitting antenna over an isotropic radiator (1.00).

d is the distance in meters from which the field strength was measured (3M).

Example: the Max Radiation Emission of base ch01 = 101.06 dBuV/m

$$10^{(101.06/20)} \times 10^{-6} = 0.11297 \text{ V}$$

$$\begin{aligned} \text{E.R.P.} &= (0.11297 \times 3)^2 / 30 = 3.828 \text{ mW} = 10 \times \log (3.828 \text{ mW}/1\text{mW}) \\ &= 5.830 \text{ dBm} \end{aligned}$$

V. Section 15.247 (C)(2): Spurious emissions (Radiated)

5.1 Test Condition & Setup

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591A Spectrum Analyzer, EMCO Biconical Antenna (Model 3110) for 30 - 200 MHz, EMCO Log-Periodic Antenna (Model 3146) for 200 - 1000 MHz and spectrum was examined from 1 GHz to 18GHz using an Hewlett Packard 8592A Spectrum Analyzer, EMCO Horn Antenna (Model 3115) for 1 G - 18 GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP8568b for frequency 30MHz to 1000MHz, and HP8592A for frequency 1 GHz to 18 GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1 GHz to 18GHz) and the analyzer was operated in the maximum hold mode.

There are two test condition apply in this test item, the test procedure description as the following:

(1) Base and handset station transmit only:

Using the RS-232 port of notebook and Rockwell software to control the base , handset. Then making access to the mode of continuous transmission. Three channel is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).

With the transmitter operating from a fully charged battery and using the internal antenna, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to low, mid and high channels in the 902-928 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.

For frequency between 30MHz to 1000MHz

$F_{ia} (dBuV/m) = F_{lr} (dBuV) + \text{Correction Factors}$
 $F_{ia} : \text{Actual Field Intensity}$
 $F_{lr} : \text{Reading of the Field Intensity}$
 $\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss}$

For frequency between 1 GHz to 18 GHz

$F_{ia}(dBuV/m) = F_{lr}(dBuV) + \text{Correction Factor} - \text{Duty Cycle}$
 $F_{ia} : \text{Actual Field Intensity}$
 $F_{lr} : \text{Reading of the Field Intensity}$
 $\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} + \text{Distance Factor (9.54dB)} - \text{Amplifier Gain}$

The setting up procedure is recorded on Appendix A.



5.2 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	9KHz-2.9 GHz Spectrum Analyzer	HP8594EM	50.00
Hewlett Packard	50kHz-22GHz Spectrum Analyzer	HP8592A	50.00
Hewlett Packard	10KHz-1GHz Quasi-peak Adapter	HP85650A	50.00
Hewlett Packard	20Hz-2GHz RF Preselector	HP85685A	50.00
Hewlett Packard	1GHz-26.5GHz Preamplifier	HP8449B	50.00
Anritsu	0.1-1200MHz Preamplifier	MH648A	50.00
EMCO	20-300MHz Biconical Antenna	3110.00	50.00
EMCO	200-1000MHz Log-Periodic Antenna	3146.00	50.00
EMCO	1G-18GMHz Double Ridge Antenna	3115.00	50.00
TRC	Open Field Test Site	TRC-OFTS1	N/A
TRC	Notch Filter	N/A	50.00
TRC	Horn Antenna with Amplifier	TRC1	50.00

5.2.1 Duty Cycle Factor Measurement

The duty cycle factor measurement is performed in a shield enclosure. The test condition and setup is as same as paragraph III. Set the RB = 1MHz, VB=1MHz, and span = 0 MHz. Link the base and handset, then get the Time of duty and cycle as follow page.

The duty cycle factor = $20 \log (T_{duty} / T_{cycle}) = 20 \log (0.9500/2.0000) = -6.46$

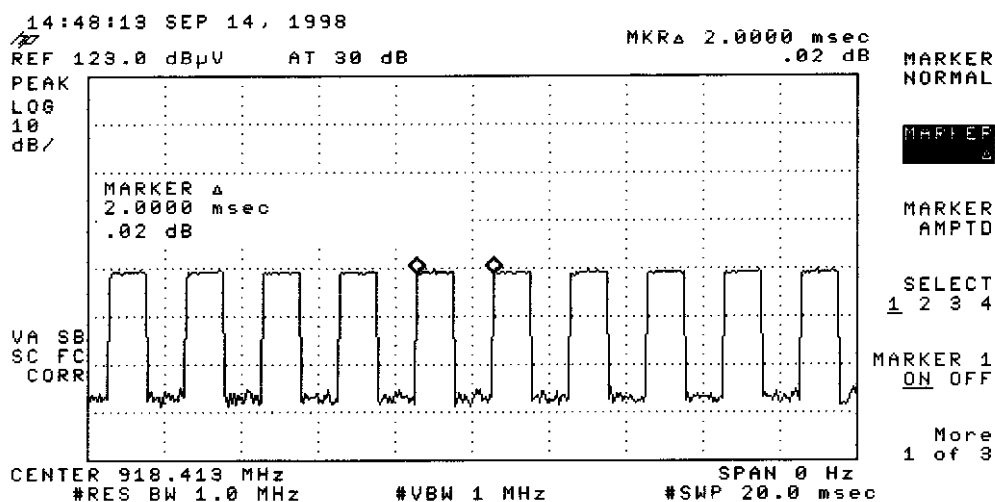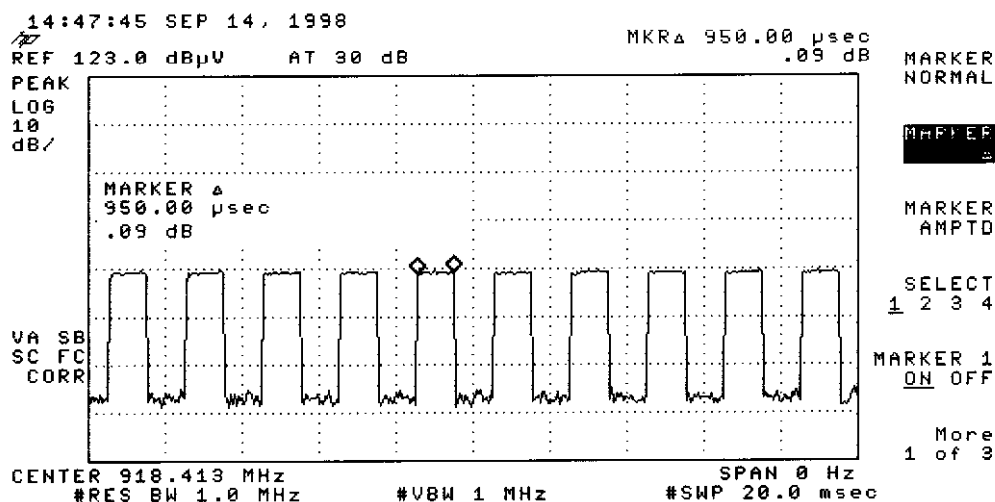

5.4 Test Result of Second Harmonic

Set the spectrum RB= 3 MHz, VB = 3MHz and span = 5MHz. The correction factors of the second harmonic is. The second harmonic must lower 20 dB than the fundamental.

Model No. : 2-911SSTC

EUT : 900MHz S.S.T. Cordless Phone

Table7 Second Harmonic Attenuation

Channel	Fundamental (MHz)	Fundamental (dBuV/m)	2 nd Harmonic (GHz)	2 nd Har. (dBuV/m)	Result (F/H dB)	Limit (dB)	Margin (dB)
B/S CH 01	904.338	107.69	1.808	33.66	74.03	20.00	54.03
B/S CH 10	914.625	107.97	1.826	34.66	73.31	20.00	53.31
B/S CH 20	926.163	107.67	1.840	34.49	73.18	20.00	53.18
H/S CH 01	904.287	105.10	1.803	32.82	72.28	20.00	52.28
H/S CH 10	914.625	106.37	1.821	36.66	69.71	20.00	49.71
H/S CH 20	926.013	104.28	1.839	32.16	72.12	20.00	52.12

Note:

1. The data in the above table are summarize the following attachment spectrum analyzer hard copy.
2. Result = Fundamental – 2nd Harmonic must over 20 dB.

5.5 Test Result of Spurious Radiated Emissions

5.5.1 Base and handset station transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Model No. : 2-911SSTC

EUT : 900MHz S.S.T. Cordless Phone

Table 8. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 1, Base Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
297.630	47.98	1.00	182	-16.03	31.95	46.00	-14.05
336.040	49.90	1.00	128	-14.54	35.36	46.00	-10.64
441.640	46.73	1.00	176	-7.88	38.85	46.00	-7.15
499.240	47.57	1.00	19	-10.04	37.53	46.00	-8.47
518.440	47.15	1.00	26	-11.11	36.04	46.00	-9.96
537.640	46.81	1.00	299	-10.99	35.82	46.00	-10.18
547.240	45.51	1.00	182	-11.19	34.32	46.00	-11.68
643.250	44.87	1.00	145	-13.30	31.57	46.00	-14.43
662.450	44.64	1.00	136	-12.76	31.88	46.00	-14.12
700.860	47.99	1.00	154	-12.83	35.16	46.00	-10.84
739.260	48.54	1.00	249	-13.82	34.72	46.00	-11.28
883.280	48.14	1.00	77	-13.87	34.27	46.00	-11.73
892.880	46.99	1.00	260	-14.00	32.99	46.00	-13.01

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 9. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 1, Base Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.708	49.79	100.00	8	-6.84	-6.46	36.49	54	-17.51
3.615	51.59	100.00	265	-5.64	-6.46	39.49	54	-14.51
4.515	35.54	100.00	95	3.91	-6.46	32.99	54	-21.01

- Note:
- Margin = Corrected - Limit.
 - Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 10. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 1, Base Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)			Limit (dBuV/m)	Margin (dB)
297.630	45.01	1.00	173	-16.03	28.98	46.00	-17.02
336.040	45.58	1.00	183	-14.54	31.04	46.00	-14.96
441.640	42.62	3.02	89	-7.88	34.74	46.00	-11.26
499.240	44.59	1.00	137	-10.04	34.55	46.00	-11.45
518.440	44.97	1.00	97	-11.11	33.86	46.00	-12.14
537.640	45.76	1.00	131	-10.99	34.77	46.00	-11.23
547.240	44.60	1.00	162	-11.19	33.41	46.00	-12.59
643.250	44.30	3.02	236	-13.30	31.00	46.00	-15.00
662.450	45.40	1.00	215	-12.76	32.64	46.00	-13.36
700.860	46.80	1.00	109	-12.83	33.97	46.00	-12.03
739.260	47.25	1.00	220	-13.82	33.43	46.00	-12.57
883.280	48.58	1.00	187	-13.87	34.71	46.00	-11.29
892.880	51.18	1.00	131	-14.00	37.18	46.00	-8.82

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 11. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 1, Base Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.708	56.79	100.00	81	-6.84	-6.46	43.49	54	-10.51
3.615	51.09	100.00	65	-5.64	-6.46	38.99	54	-15.01
4.515	32.87	100.00	295	3.91	-6.46	30.32	54	-23.68

- Note:
- Margin = Corrected - Limit.
 - Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 12. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 10, Base Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
336.043	48.89	1.00	184	-14.54	34.35	46.00	-11.65
384.048	45.66	1.00	120	-13.45	32.21	46.00	-13.79
441.640	47.61	1.00	303	-7.88	39.73	46.00	-6.27
499.240	48.53	1.00	29	-10.04	38.49	46.00	-7.51
528.040	46.45	1.00	313	-10.95	35.50	46.00	-10.50
547.260	47.08	1.00	141	-11.19	35.89	46.00	-10.11
566.460	44.16	1.00	313	-11.82	32.34	46.00	-13.66
624.060	46.78	1.00	139	-13.59	33.19	46.00	-12.81
643.260	46.58	1.00	191	-13.30	33.28	46.00	-12.72
700.866	49.64	1.00	144	-12.83	36.81	46.00	-9.19
720.066	49.64	1.00	255	-13.79	35.85	46.00	-10.15
873.683	45.48	1.00	117	-13.75	31.73	46.00	-14.27
892.883	47.47	1.00	212	-14.00	33.47	46.00	-12.53

Note :

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 13. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 10, Base Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.733	49.96	100.00	21	-6.84	-6.46	36.66	54	-17.34
3.653	50.42	100.00	255	-5.64	-6.46	38.32	54	-15.68
4.570	32.21	100.00	197	3.91	-6.46	29.66	54	-24.34
5.480	24.23	100.00	55	9.72	-6.46	27.49	54	-26.51

Note :

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors + Duty Cycle = Corrected

Table 14. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 10, Base Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
336.043	46.16	1.00	252	-14.54	31.62	46.00	-14.38
384.048	43.24	1.00	217	-13.45	29.79	46.00	-16.21
441.640	42.23	1.00	234	-7.88	34.35	46.00	-11.65
499.240	42.50	1.00	128	-10.04	32.46	46.00	-13.54
528.040	44.91	1.00	127	-10.95	33.96	46.00	-12.04
547.260	44.61	1.00	207	-11.19	33.42	46.00	-12.58
566.460	45.03	1.00	119	-11.82	33.21	46.00	-12.79
624.060	48.08	1.00	130	-13.59	34.49	46.00	-11.51
643.260	48.89	1.00	206	-13.30	35.59	46.00	-10.41
700.866	49.52	1.00	113	-12.83	36.69	46.00	-9.31
720.066	48.81	1.00	58	-13.79	35.02	46.00	-10.98
873.683	47.24	1.00	157	-13.75	33.49	46.00	-12.51
892.883	49.27	3.02	213	-14.00	35.27	46.00	-10.73

Note :

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 15. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 10, Base Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.733	56.29	100.00	210	-6.84	-6.46	42.99	54	-11.01
3.653	57.09	100.00	325	-5.64	-6.46	44.99	54	-9.01
4.570	33.37	100.00	17	3.91	-6.46	30.82	54	-23.18
5.480	27.90	100.00	5	9.72	-6.46	31.16	54	-22.84

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 16. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 20, Base Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
336.040	50.04	1.00	162	-14.54	35.50	46.00	-10.50
412.840	47.06	1.00	13	-13.13	33.93	46.00	-12.07
441.640	46.12	1.00	309	-7.88	38.24	46.00	-7.76
499.240	49.12	1.00	22	-10.04	39.08	46.00	-6.92
518.440	49.72	1.00	301	-11.11	38.61	46.00	-7.39
537.655	48.09	1.00	24	-10.99	37.10	46.00	-8.90
547.255	49.19	1.00	292	-11.19	38.00	46.00	-8.00
604.855	42.11	1.00	56	-13.23	28.88	46.00	-17.12
662.455	44.48	1.00	196	-12.76	31.72	46.00	-14.28
700.863	48.79	1.00	145	-12.83	35.96	46.00	-10.04
720.063	46.54	1.00	183	-13.79	32.75	46.00	-13.25
873.683	46.23	1.00	131	-13.75	32.48	46.00	-13.52
892.878	48.35	1.00	206	-14.00	34.35	46.00	-11.65

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 17. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 20, Base Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.761	49.29	100.00	33	-6.84	-6.46	35.99	54	-18.01
3.710	46.59	100.00	123	-5.64	-6.46	34.49	54	-19.51
4.631	34.37	100.00	258	3.91	-6.46	31.82	54	-22.18
5.552	28.73	100.00	65	9.72	-6.46	31.99	54	-22.01

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 18. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 20, Base Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)		Limit (dBuV/m)	Margin (dB)
336.040	44.92	1.00	128	-14.54	30.38	46.00	-15.62
412.840	42.32	1.00	280	-13.13	29.19	46.00	-16.81
441.640	41.35	1.00	250	-7.88	33.47	46.00	-12.53
499.240	45.68	1.00	146	-10.04	35.64	46.00	-10.36
518.440	47.27	1.00	148	-11.11	36.16	46.00	-9.84
537.655	46.51	1.00	185	-10.99	35.52	46.00	-10.48
547.255	46.75	1.00	0	-11.19	35.56	46.00	-10.44
604.855	46.27	1.00	184	-13.23	33.04	46.00	-12.96
662.455	46.51	1.00	212	-12.76	33.75	46.00	-12.25
700.863	47.57	1.00	259	-12.83	34.74	46.00	-11.26
720.063	46.66	1.00	67	-13.79	32.87	46.00	-13.13
873.683	48.33	1.00	202	-13.75	34.58	46.00	-11.42
892.878	50.96	1.00	127	-14.00	36.96	46.00	-9.04

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 19. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 20, Base Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.761	55.12	100.00	325	-6.84	-6.46	41.82	54	-12.18
3.710	54.09	100.00	165	-5.64	-6.46	41.99	54	-12.01
4.631	33.21	100.00	84	3.91	-6.46	30.66	54	-23.34
5.552	27.56	100.00	98	9.72	-6.46	30.82	54	-23.18

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 20. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 01, Handset Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
240.020	52.22	1.00	162	-19.20	33.02	46.00	-12.98
249.630	53.85	1.00	38	-18.69	35.16	46.00	-10.84
364.840	38.25	1.00	129	-13.73	24.52	46.00	-21.48
384.040	37.35	1.00	141	-13.45	23.90	46.00	-22.10
430.240	37.67	1.00	92	-13.17	24.50	46.00	-21.50
422.440	37.85	1.00	123	-11.87	25.98	46.00	-20.02
441.650	39.19	1.00	88	-7.88	31.31	46.00	-14.69
460.850	38.47	1.00	112	-10.73	27.74	46.00	-18.26
489.650	37.46	1.00	103	-10.36	27.10	46.00	-18.90
508.860	38.14	1.00	309	-11.51	26.63	46.00	-19.37
528.050	36.70	1.00	276	-10.95	25.75	46.00	-20.25
849.720	40.13	1.00	149	-13.73	26.40	46.00	-19.60

Note :

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 21. Open Field Radiated Emissions For 1 GHz - 18GHz [Channel 01, Handset Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (")	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.701	53.12	100.00	323	-6.84	-6.46	39.82	54	-14.18
3.618	53.42	100.00	12	-5.64	-6.46	41.32	54	-12.68
4.516	42.37	100.00	288	3.91	-6.46	39.82	54	-14.18

Note :

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 22. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 01, Handset Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
240.030	48.38	3.02	90	-19.20	29.18	46.00	-16.82
249.630	50.06	3.02	128	-18.69	31.37	46.00	-14.63
364.840	47.13	1.00	186	-13.73	33.40	46.00	-12.60
384.040	48.23	1.00	230	-13.45	34.78	46.00	-11.22
430.240	49.52	1.00	175	-13.17	36.35	46.00	-9.65
422.440	51.96	1.00	70	-11.87	40.09	46.00	-5.91
441.650	52.84	1.00	196	-7.88	44.96	46.00	-1.04
460.850	51.18	1.00	228	-10.73	40.45	46.00	-5.55
489.650	50.10	1.00	196	-10.36	39.74	46.00	-6.26
508.850	48.49	1.00	230	-11.51	36.98	46.00	-9.02
528.060	46.20	1.00	198	-10.95	35.25	46.00	-10.75
849.700	40.69	1.00	137	-13.73	26.96	46.00	-19.04

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 23. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 01, Handset Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.701	48.62	100.00	32	-6.84	-6.46	35.32	54	-18.68
3.618	46.76	100.00	129	-5.64	-6.46	34.66	54	-19.34
4.516	34.04	100.00	287	3.91	-6.46	31.49	54	-22.51

- Note:
- Margin = Corrected - Limit.
 - Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 24. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 10, Handset Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
259.240	59.59	1.00	313	-18.35	41.24	46.00	-4.76
364.840	38.87	1.00	91	-13.73	25.14	46.00	-20.86
384.040	39.08	1.00	71	-13.45	25.63	46.00	-20.37
403.240	37.90	1.00	102	-13.17	24.73	46.00	-21.27
441.650	40.72	1.00	24	-7.88	32.84	46.00	-13.16
451.250	37.87	1.00	56	-10.18	27.69	46.00	-18.31
460.850	39.57	1.00	25	-10.73	28.84	46.00	-17.16
470.450	39.83	1.00	299	-10.88	28.95	46.00	-17.05
480.050	39.11	1.00	38	-10.52	28.59	46.00	-17.41
489.650	37.83	1.00	306	-10.36	27.47	46.00	-18.53
508.850	38.15	1.00	31	-11.51	26.64	46.00	-19.36
528.050	36.79	1.00	304	-10.95	25.84	46.00	-20.16

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 25. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 10, Handset Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.738	54.46	100.00	65	-6.84	-6.46	41.16	54	-12.84
3.654	52.76	100.00	253	-5.64	-6.46	40.66	54	-13.34
4.571	41.87	100.00	78	3.91	-6.46	39.32	54	-14.68

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 26. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 10, Handset Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
259.230	55.09	1.00	262	-18.35	36.74	46.00	-9.26
364.840	46.96	1.00	219	-13.73	33.23	46.00	-12.77
384.040	48.33	1.00	139	-13.45	34.88	46.00	-11.12
403.240	49.55	1.00	215	-13.17	36.38	46.00	-9.62
441.650	52.70	1.00	199	-7.88	44.82	46.00	-1.18
451.250	50.38	1.00	236	-10.18	40.20	46.00	-5.80
460.850	51.03	1.00	199	-10.73	40.30	46.00	-5.70
470.450	50.81	1.00	236	-10.88	39.93	46.00	-6.07
480.050	48.04	1.00	204	-10.52	37.52	46.00	-8.48
489.650	49.40	1.00	234	-10.36	39.04	46.00	-6.96
508.860	47.81	1.00	202	-11.51	36.30	46.00	-9.70
528.060	45.48	1.00	236	-10.95	34.53	46.00	-11.47

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor = Corrected

Table 27. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 10, Handset Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.738	46.96	100.00	265	-6.84	-6.46	33.66	54	-20.34
3.654	44.92	100.00	23	-5.64	-6.46	32.82	54	-21.18
4.571	33.04	100.00	178	3.91	-6.46	30.49	54	-23.51

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 28. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 20, Handset Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)		Limit (dBuV/m)	Margin (dB)
240.200	35.45	1.00	204	-19.19	16.26	46.00	-29.74
259.230	60.47	1.00	347	-18.35	42.12	46.00	-3.88
384.040	38.68	1.00	35	-13.45	25.23	46.00	-20.77
403.240	38.38	1.00	72	-13.17	25.21	46.00	-20.79
441.650	40.04	1.00	27	-7.88	32.16	46.00	-13.84
451.250	37.71	1.00	63	-10.18	27.53	46.00	-18.47
460.850	38.42	1.00	32	-10.73	27.69	46.00	-18.31
470.450	37.46	1.00	310	-10.88	26.58	46.00	-19.42
480.050	35.83	1.00	29	-10.52	25.31	46.00	-20.69
489.650	35.67	1.00	68	-10.36	25.31	46.00	-20.69
508.860	37.16	1.00	50	-11.51	25.65	46.00	-20.35
528.060	36.09	1.00	100	-10.95	25.14	46.00	-20.86

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 29. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 20, Handset Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.765	50.62	100.00	5	-6.84	-6.46	37.32	54	-16.68
3.700	46.92	100.00	53	-5.64	-6.46	34.82	54	-19.18
4.626	36.04	100.00	279	3.91	-6.46	33.49	54	-20.51

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

Table 30. Open Field Radiated Emissions For 30 MHz - 1 GHz [Channel 20, Handset Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)		Limit (dBuV/m)	Margin (dB)
240.200	37.47	1.00	319	-19.19	18.28	46.00	-27.72
259.230	55.56	1.00	271	-18.35	37.21	46.00	-8.79
384.040	48.02	1.00	134	-13.45	34.57	46.00	-11.43
403.240	49.52	1.00	168	-13.17	36.35	46.00	-9.65
441.650	52.25	1.00	175	-7.88	44.37	46.00	-1.63
451.250	50.10	1.00	231	-10.18	39.92	46.00	-6.08
460.850	50.75	1.00	193	-10.73	40.02	46.00	-5.98
470.450	50.42	1.00	230	-10.88	39.54	46.00	-6.46
480.050	47.69	1.00	198	-10.52	37.17	46.00	-8.83
489.650	49.15	1.00	232	-10.36	38.79	46.00	-7.21
508.860	46.87	1.00	199	-11.51	35.36	46.00	-10.64
528.060	45.97	1.00	231	-10.95	35.02	46.00	-10.98

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 31. Open Field Radiated Emissions For 1 GHz - 18 GHz [Channel 20, Handset Vertical]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ()	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
2.765	43.96	100.00	259	-6.84	-6.46	30.66	54	-23.34
3.700	40.76	100.00	38	-5.64	-6.46	28.66	54	-25.34
4.626	31.04	100.00	72	3.91	-6.46	28.49	54	-25.51

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

VI Section 15.247(d): Power spectral density.


6.1 Test Condition & Setup

The tests below are running with the DCT transmitter set at high power in TDD mode. A serial port from a computer to the DCT UUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. A log antenna was connected with the spectrum analyzer.

The EUT is tested in open field site. Put EUT on the middle of a wooden table. Set spectrum analyzer RBW = 3 KHz, VBW > RBW (e.g. VBW = 10 KHz), Span = 1.5 MHz. Turn around the table to find maximum emission. Then set the Span = 300 KHz and sweep time = 100 sec. Peak the maximum emission again. The peak level measured must be no greater than +8 dBm.

The setting up procedure is recorded on Appendix A.

6.2 Test Instruments Configuration

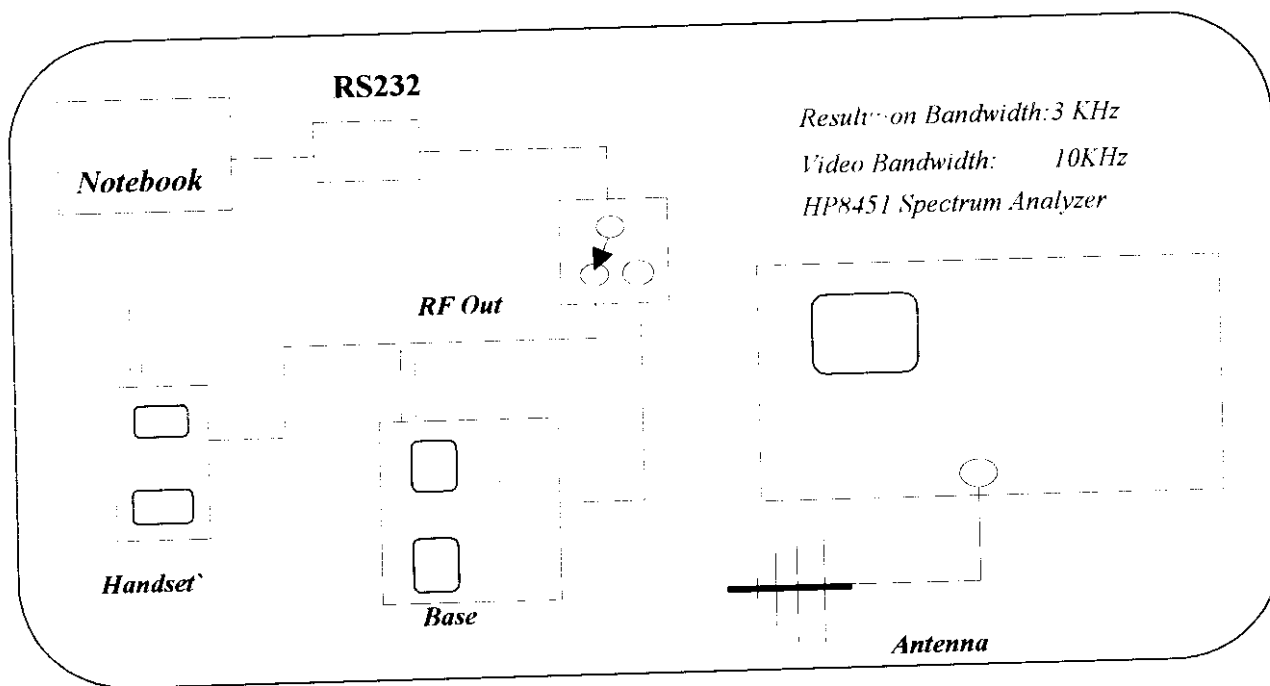

P.S.A serial port from notebook computer to control the EUT at maximal power output and channel Number

Fig 12. Test Configuration of power spectral density



6.3 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	9KHz-2.9 GHz Spectrum Analyze	HP8594EM	50.00

6.4 Required of Carrier frequency

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

Test Condition & Setup: same as 3.1

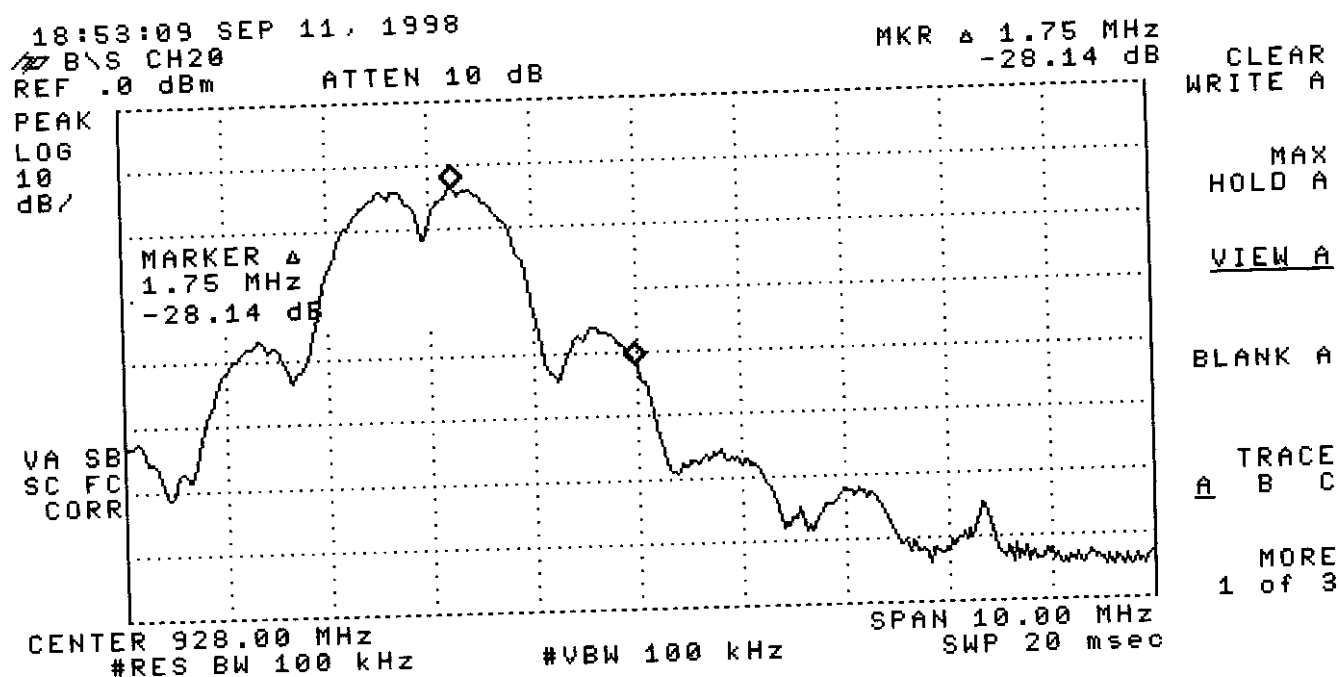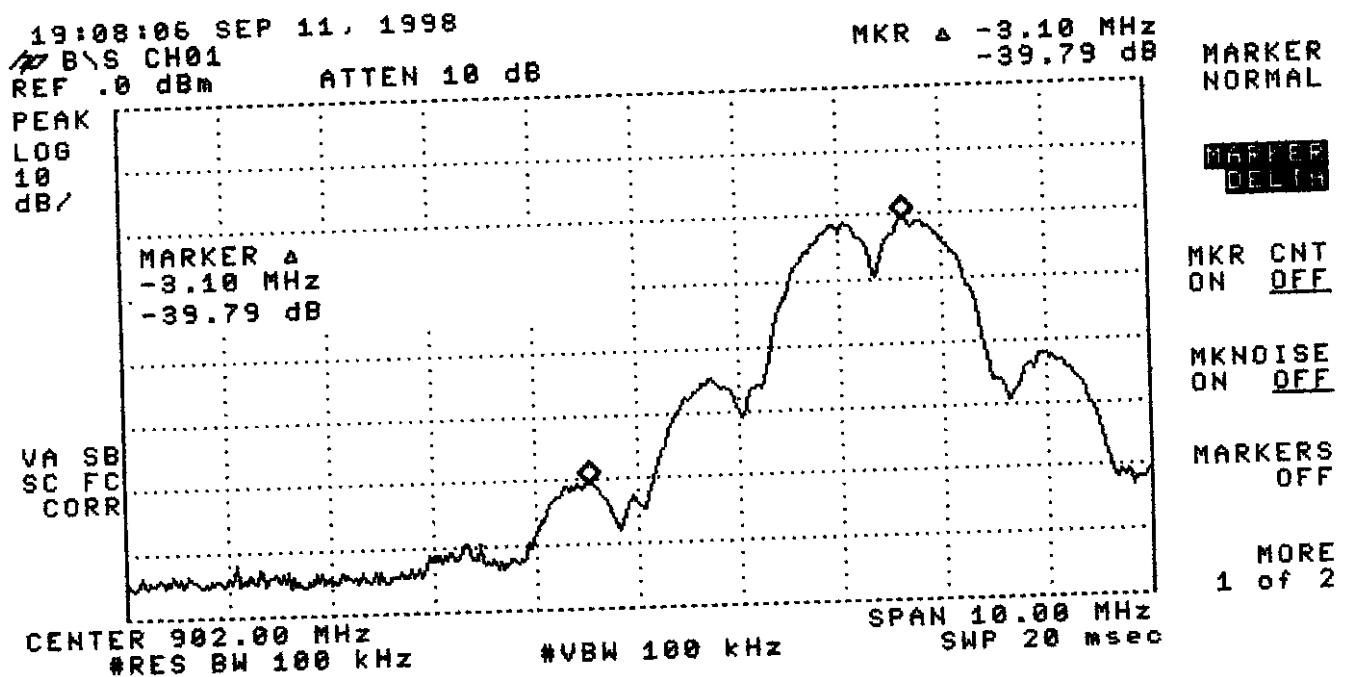

19:24:51 SEP 11, 1998

H\S CH01

REF .0 dBm

ATTEN 10 dB

MKR Δ -2.40 MHz
-43.12 dB

MARKER
NORMAL

PEAK
LOG
10
dB/

MARKER
DELTA

MARKER Δ
-2.40 MHz
-43.12 dB

MKR CNT
ON OFF

MKNOISE
ON OFF

MARKERS
OFF

MORE
1 of 2

VA SB
SC FC
CORR


CENTER 902.00 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

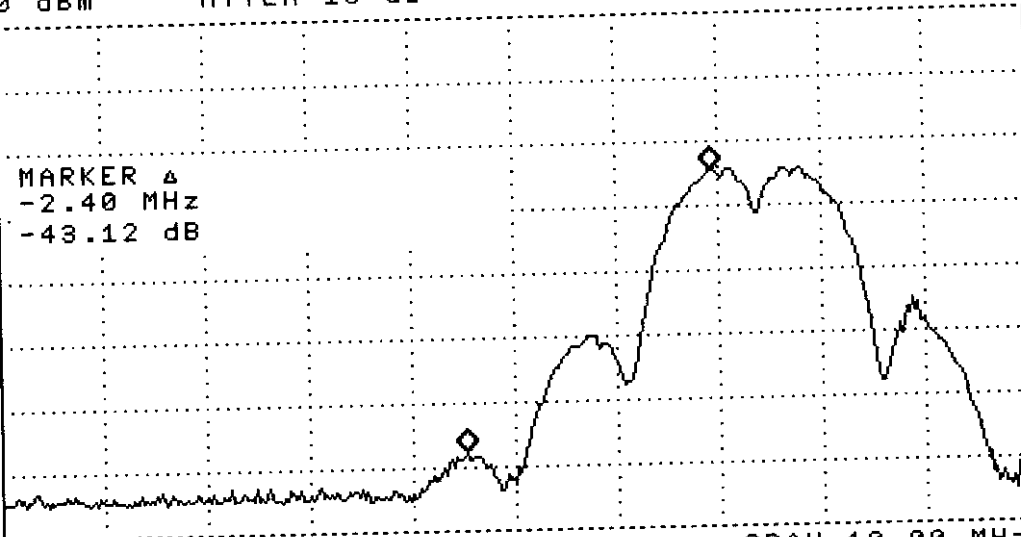

19:41:18 SEP 11, 1998

H\S CH20

REF .0 dBm

ATTEN 10 dB

MKR Δ 2.48 MHz
-34.52 dB

MARKER
NORMAL

PEAK
LOG
10
dB/

MARKER
DELTA

MARKER Δ
2.48 MHz
-34.52 dB

MKR CNT
ON OFF

MKNOISE
ON OFF

MARKERS
OFF

MORE
1 of 2

VA SB
SC FC
CORR


CENTER 928.00 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 20 msec

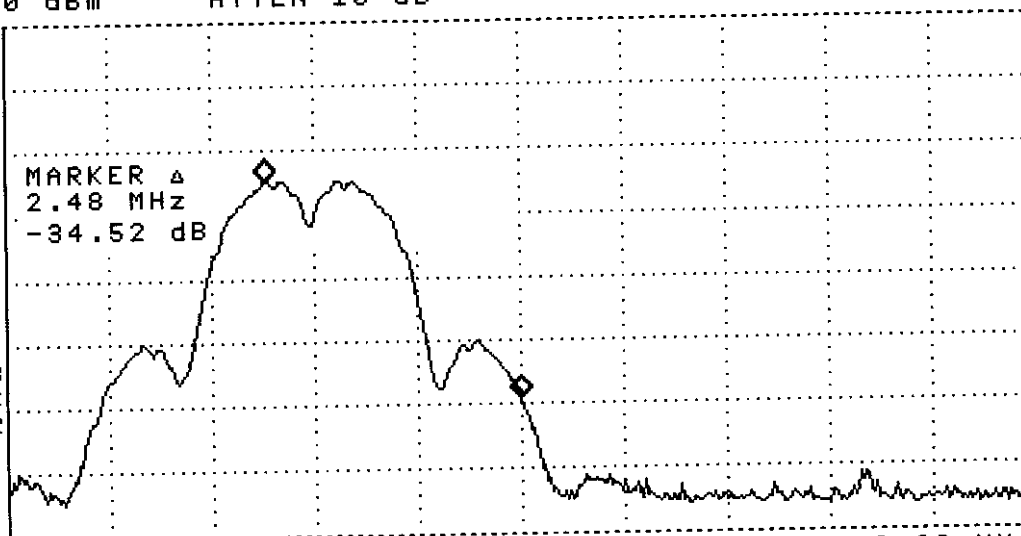


10:26:24 14 SEP 1998
 B/S CH01
 REF 136.0 dBpV AT 40 dB

MRK 904.7275 MHz
 110.79 dBpV

PEAK
 LOG
 10
 dB/

VA WB
 SC FC
 CORR

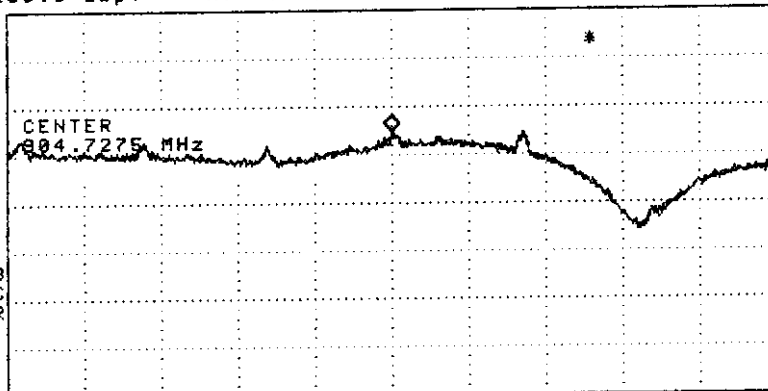

CENTER 904.7275 MHz
 #RES BW 3.0 kHz #VBW 10 kHz SPAN 300.0 kHz
 #SWP 100 sec

CLEAR
 WRITE A

MAX
 HOLD A

VIEW A

BLANK A

Trace
 A B C


More
 1 of 4

10:37:45 14 SEP 1998
 B/S CH10
 REF 136.0 dBpV AT 40 dB

MRK 914.0290 MHz
 109.87 dBpV

PEAK
 LOG
 10
 dB/

VA WB
 SC FC
 CORR

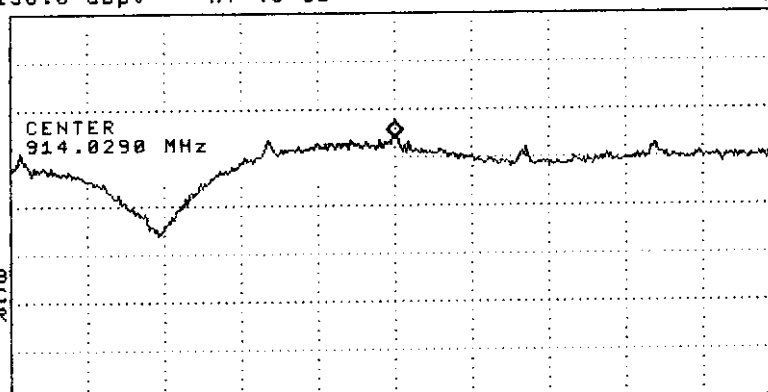

CENTER 914.0290 MHz
 #RES BW 3.0 kHz #VBW 10 kHz SPAN 300.0 kHz
 #SWP 100 sec

CLEAR
 WRITE A

MAX
 HOLD A

VIEW A

BLANK A

Trace
 A B C


More
 1 of 4

10:43:29 14 SEP 1998
 B/S CH20
 REF 136.0 dBpV AT 40 dB

MRK 926.3305 MHz
 110.95 dBpV

PEAK
 LOG
 10
 dB/

VA WB
 SC FC
 CORR

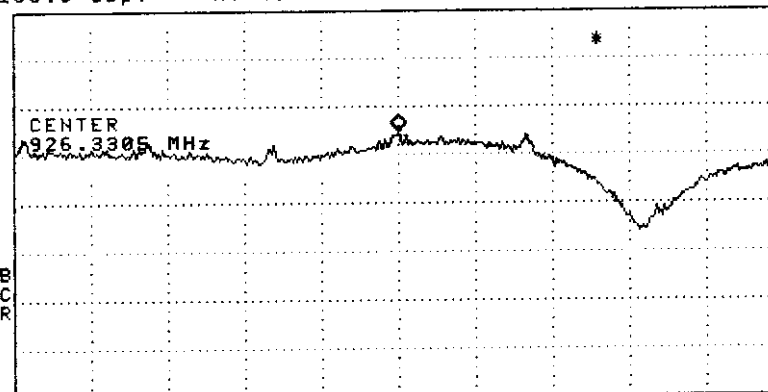

CENTER 926.3305 MHz
 #RES BW 3.0 kHz #VBW 10 kHz SPAN 300.0 kHz
 #SWP 100 sec

CLEAR
 WRITE A




MAX
 HOLD A

VIEW A

BLANK A

Trace
 A B C

More
 1 of 4

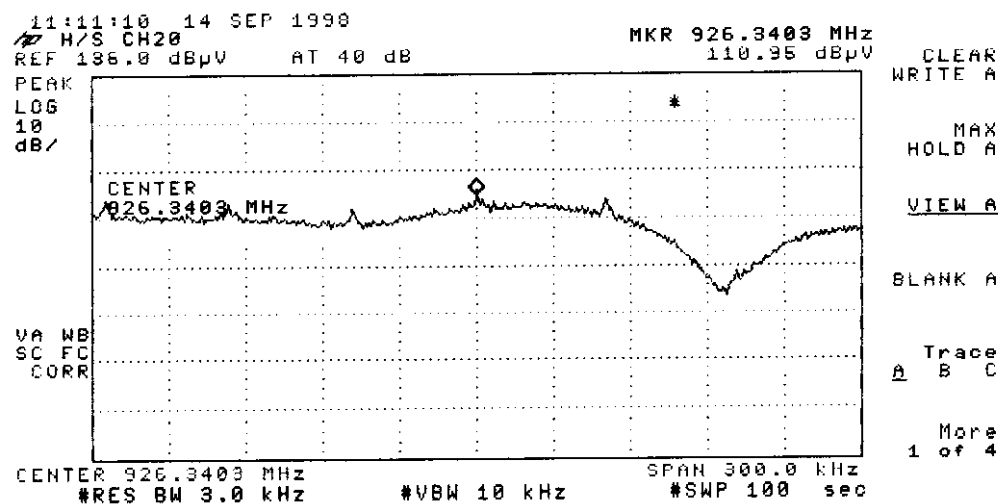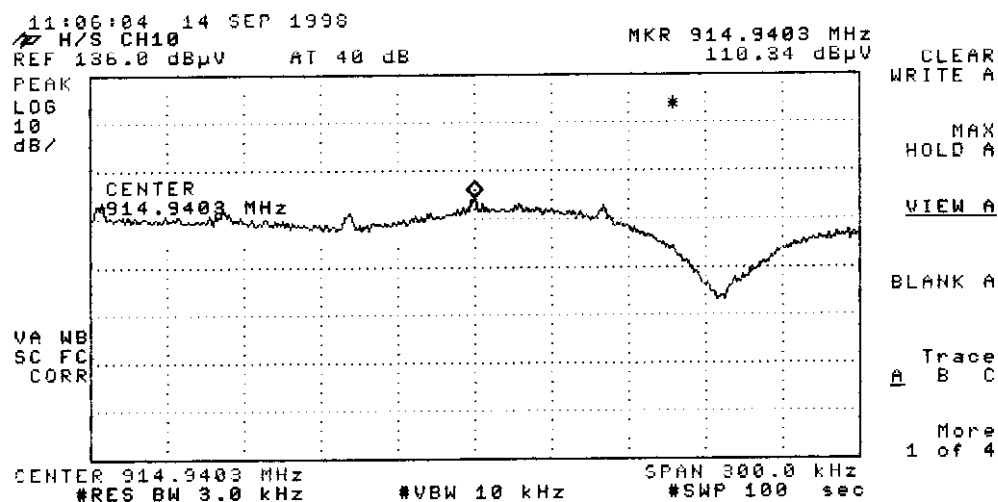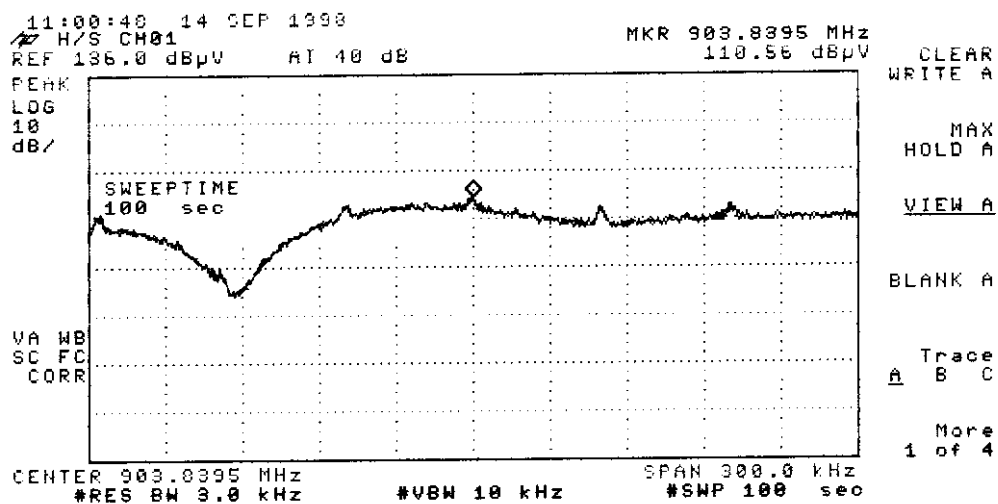

6.5 Test Result of Power spectral density.

The following table shows a summary of the highest power out of UT.

Model No. : 2-911SSTC

EUT : 900MHz S.S.T. Cordless Phone

Table 33. Power Spectral Density

Channel	Frequency (MHz)	Ppr (dBuV)	CF (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
B/S CH 01	904.7275	110.79	-14.20	1.361	8.00	-6.639
B/S CH 10	914.0290	109.87	-14.48	0.161	8.00	-7.839
B/S CH 20	926.3305	110.95	-14.84	0.881	8.00	-7.119
H/S CH 01	903.8395	110.56	-14.18	1.151	8.00	-6.849
H/S CH 10	914.9403	110.34	-14.51	0.601	8.00	-7.399
H/S CH 20	926.3403	110.95	-14.84	0.881	8.00	-7.119

Note:

1. The attachment follow by this page and there is no page number.
2. Ppr: spectrum read power density (using peak search mode). CF: correct factor Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + CF$
4. Effective Radiation Power (E.R.P.) = $(E d)^2 / 30G$

E is the measured maximum field strength in V/m utilizing the maximum hold mode
RBW (3KHz).

G is the numeric gain of the transmitting antenna over an isotropic radiator (1.00).

d is the distance in meters from which the field strength was measured (3M).

Example: the Max Radiation Emission of base ch01 = $110.79 - 14.20 = 96.59$ dBuV/m

$$10^{(96.59/20)} \times 10^{-6} = 0.06753V$$

$$\begin{aligned} \text{E.R.P.} &= (0.06753 \times 3)^2 / 30 = 1.368 \text{ mW} = 10 \times \log (1.368 \text{ mW}/1\text{mW}) \\ &= 1.61 \text{ dBm} \end{aligned}$$

VII Section 15.247(e): Processing Gain.

7.1 Test Condition & Setup

A. Bit Error Rate (Pe)

The subjective device RF module (base & handset) digital modulation by Differential Phase -Shift Keying (DPSK). the DPSK can use it's previous waveform as the phase reference for demodulation and thus requires no coherent detection. which greatly simplifies the receiver structure but with some Bit Error Rate (BER) degradation because of noisy phase reference. There is tradeoff between system complexity and system performance. In order to driver the DPSK error probability, we observe that DPSK using differential coding, we observable that DPSK using different coding is essentially an orthogonal signal scheme. A binary 1 is transmitted a sequence of two pulse (P,P) or (-P,-P) over 2 To seconds (no transition). Similarly, a binary 0 is transmitted by a sequence of two plus (P,-P) or (-P,P) over 2 TO seconds (transition). Either of the pulse sequences used for binary 1 is orthogonal to either of the pulse sequences used for binary 0. Because no local carrier is generated for demodulation, the detection is noncoherent. with an effective pulse energy equal to 2 Ep (twice the energy of pulse P). The actual energy transmitted per digit only Ep, however, the same as in noncoherent FSK. Consequently, the performance of DPSK is 3 dB superior to that of noncoherent FSK. We can write Pe for DPSK as :

The major component inside the subjective device are supplied by Rock well, Included RF block transmitter (RF101), Receiver (RF 100), and Base band block ASIC (c8502-13), CODEC (10497-14), above 4 IC chips are affected the processing gain as following :

$$J/S = (W/RD) / (ED/NO) \text{ [without CODING]}$$

Where : W= Spread Chip Rate = Required Transmitted Base band Bandwidth.

Rb = Information Data Rate

Eb/No = Require Energy per Bit over noise Spectral Density for a Specific Bit Error Probability.

✓ The subjective Device Information Data Rate are 80k and the Spread Chip Rate are 960k So the processing gain (10 log w/Rb) at least 10.79 dB(without Coding).

The ASIC (c8502-13) and CODEC (10497-14) these two chip included the coding function. So, it is great improve the processing gain and also improve the J/S ratio.

The Engineer work for Rock well System in Taiwan had pass us the information about the probability of error rate (Pe) must be lower than 0.001 that the system performance will satisfy for communication between Handset and Base station.

Why we need the Pe lower than 0.001, the Rockwell Semiconductor System is not explained, Since it relative with ASIC and Codec, it is confidential area that Rockwell is not allow to disdouse to the public.

When Pe = 0.001 and then Signal to Noise Ratio (S/N) = 6.2194 = 7.9dB.

B. Jamming Margin Method

The Rockwell Semiconductor System give us a software operated in the personal computer, and use the computer series port COM1 and COM2 connect Handset and Base than we can measure the Bit Error Rate.

Using this software we can perform Jamming Margin method testing. The test consists of stepping a signal generator in 50 KHz increments across the pass band of the system (up to 960 KHz away in RI's DCT). At each point, the generator level required to produce the recommend Bit Error Rate ($BER = 10e - 3$) is recorded. This level is the jamming level. The maximum implementation loss a system can claim in calculating processing gain is 2 dB. The equation to calculate the processing gain (Gp) is the following:

$$Gp = (S/N) + Mj + Lsys$$

$$Gp = 8 \text{ dB} + Mj + 2 \text{ dB}$$

FCC regulation section 15.247 (e) require the processing gain of a direct sequence system shall be at least 10 dB, when Gp must be greater than 10 dB, then the Jammer must be greater than 0 dB.

The processing gain may be measured using the CW jamming margin method. The Jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data points.

1. For avoid the handset and basestation are situation, so, the UUT were in low power mode.
2. The signal generator was selected in interference band, using this software we can perform Jamming Margin method testing, the test consists of stepping a signal generator is 50 KHz increments across the pass band of the system (up to 960 KHz away in RI's DCT). So, the BER will keep in 0.1%.

The setting up procedure is recorded on Appendix A.

7.2 Test Instruments Configuration

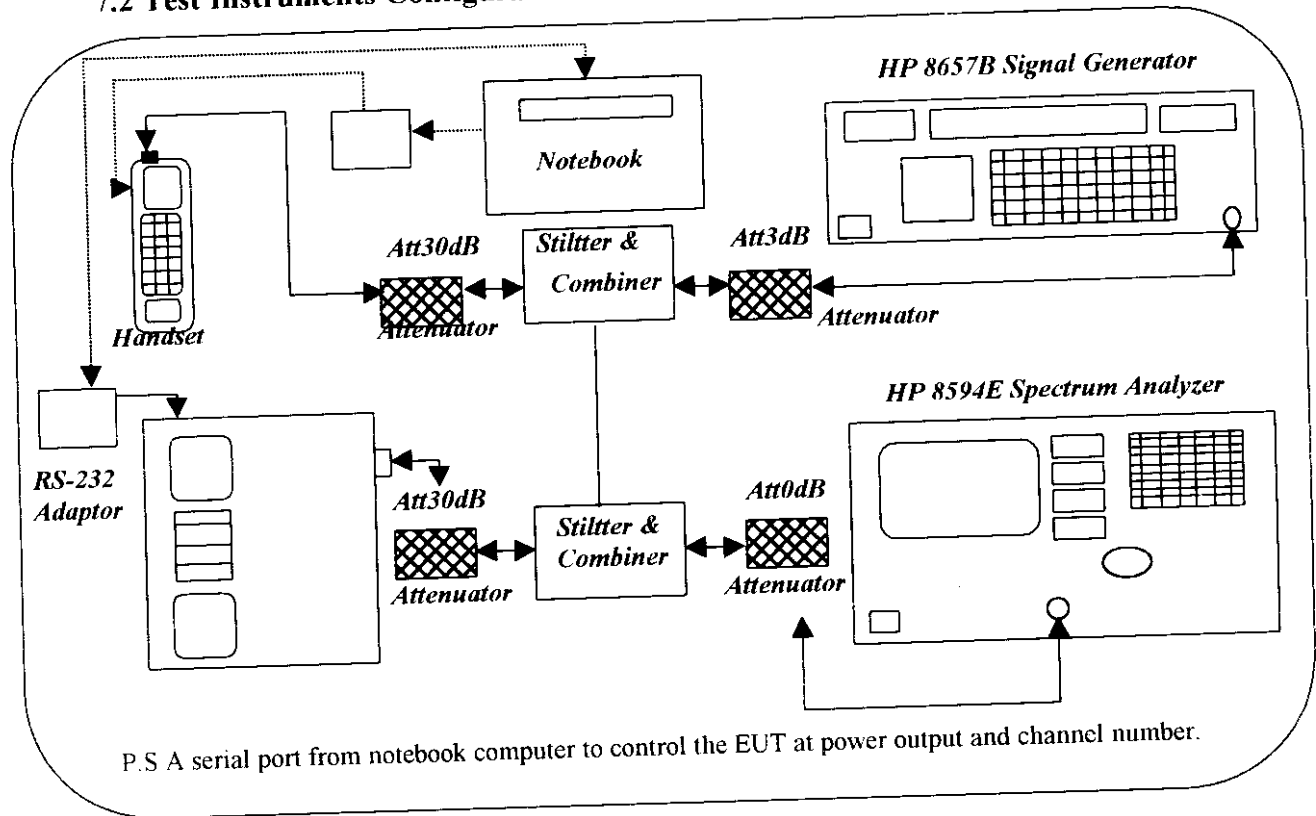


Fig. 13. Test Configuration of processing gain for base station

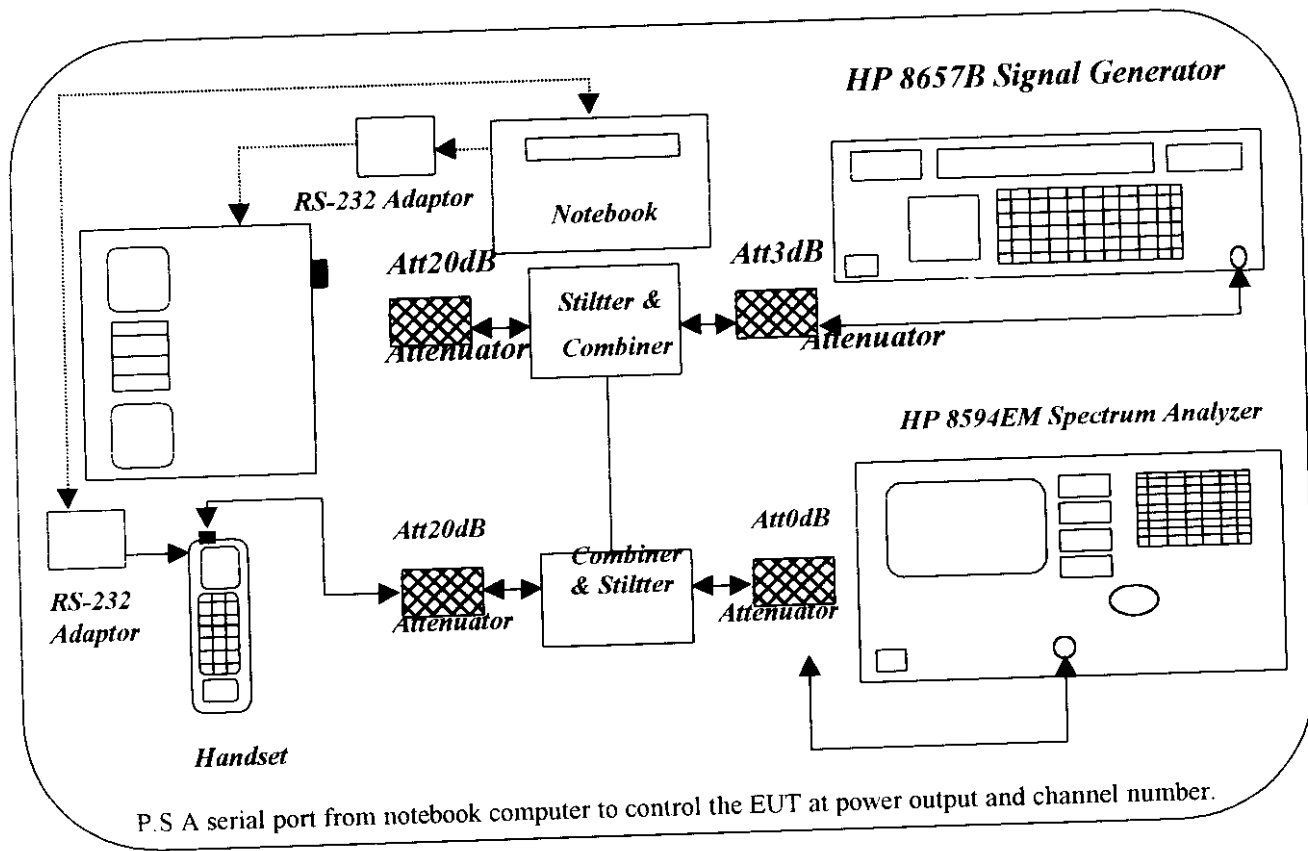


Fig. 14 Test Configuration of processing gain for handset

7.3 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	100Hz-1.8GHz Spectrum Analyzer	HP8592A	50.00
Hewlett Packard	100Hz-2.6GHz Signal Generator	HP8657B	50.00
Mini Circuits	10MHz-2GHz Power Splitter/Combiner	ZESC-2-11	50.00
Mini Circuits	DC-1.5GHz 3dB Attenuator	CAT-3	50.00
Mini Circuits	DC-1.5GHz 20dB Attenuator	CAT-20	50.00
Mini Circuits	DC-1.5GHz 30dB Attenuator	CAT-30	50.00

7.4 Test Procedure

According to the Fig. 13 of the page 42, combine the stuffs.

Measure the low power output of the channel 10 of the handset while the handset is in "Transmit-Only-Test" and the whole circuit is as same as Fig. 13. What we measure in this step is "S".

Change to the "BER Test " program. Increase the RF output of the signal generator till the BER is close to the 0.1% but under 0.1%.

Stop the program and turn off the base, handset then record the highest point of the spectrum. What we measure in this step is "J".

Star the Program again and test the next point.

Test Report**7.5 Test Result of Processing Gain.****Model No. :** 2-911SSTC**EUT :** 900MHz S.S.T. Cordless Phone**Table 34 Processing Gain [Channel 10, Base]**

Jammer Frequency (MHz)	S (dBm)	J (dBm)	Mj (J/S)	Process Gain (dB)
914.600	-41.06	-37.19	3.87	13.77
914.650	-41.06	-37.18	3.88	13.78
914.700	-41.06	-37.21	3.85	13.75
914.750	-41.06	-36.04	5.02	14.92
914.800	-41.06	-37.11	3.95	13.85
914.850	-41.06	-37.12	3.94	13.84
914.900	-41.06	-37.13	3.93	13.83
914.950	-41.06	-38.14	2.92	12.82
915.000	-41.06	-36.03	5.03	14.93
915.050	-41.06	-38.12	2.94	12.84
915.100	-41.06	-38.01	3.05	12.95
915.150	-41.06	-38.07	2.99	12.89
915.200	-41.06	-35.05	6.01	15.91
915.250	-41.06	-37.04	4.02	13.92
915.300	-41.06	-37.03	4.03	13.93
915.350	-41.06	-39.98	1.08	10.98
915.400	-41.06	-36.02	5.04	14.94
915.450	-41.06	-36.98	4.08	13.98
915.500	-41.06	-35.97	5.09	14.99
915.550	-41.06	-36.02	5.04	14.94
915.600	-41.06	-35.08	5.98	15.88
915.650	-41.06	-36.04	5.02	14.92
915.700	-41.06	-36.09	4.97	14.87
915.750	-41.06	-36.03	5.03	14.93
915.800	-41.06	-36.01	5.05	14.95
915.850	-41.06	-36.05	5.01	14.91
915.900	-41.06	-36.09	4.97	14.87
915.950	-41.06	-36.07	4.99	14.89
916.000	-41.06	-36.08	4.98	14.88
916.050	-41.06	-36.09	4.97	14.87

Test -Result:

Processing Gain: 13.77 dB

Note:

1. $GP = (S/No) + Mj + L_{sys} = 7.9dB + Mj + 2 dB$
2. S = Signal Level
3. J = Signal Generator RF Output

Table 35 Processing Gain [Channel 10, Handset]

Jammer Frequency (MHz)	S (dBm)	J (Dbm)	Mj (J/S)	Process Gain (dB)
914.600	-41.28	-38.14	3.14	13.04
914.650	-41.28	-38.15	3.13	13.03
914.700	-41.28	-38.17	3.11	13.01
914.750	-41.28	-38.00	3.28	13.18
914.800	-41.28	-38.56	2.72	12.62
914.850	-41.28	-38.25	3.03	12.93
914.900	-41.28	-39.22	2.06	11.96
914.950	-41.28	-37.14	4.14	14.04
915.000	-41.28	-36.05	5.23	15.13
915.050	-41.28	-38.15	3.13	13.03
915.100	-41.28	-34.57	6.71	16.61
915.150	-41.28	-38.15	3.13	13.03
915.200	-41.28	-37.41	3.87	13.77
915.250	-41.28	-37.05	4.23	14.13
915.300	-41.28	-39.01	2.27	12.17
915.350	-41.28	-39.06	2.22	12.12
915.400	-41.28	-38.09	3.19	13.09
915.450	-41.28	-39.05	2.23	12.13
915.500	-41.28	-38.85	2.43	12.33
915.550	-41.28	-38.89	2.39	12.29
915.600	-41.28	-37.64	3.64	13.54
915.650	-41.28	-37.58	3.70	13.60
915.700	-41.28	-37.55	3.73	13.63
915.750	-41.28	-37.56	3.72	13.62
915.800	-41.28	-37.92	3.36	13.26
915.850	-41.28	-37.54	3.74	13.64
915.900	-41.28	-37.62	3.66	13.56
915.950	-41.28	-37.69	3.59	13.49
916.000	-41.28	-37.51	3.77	13.67
915.050	-41.28	-37.21	4.07	13.97

Test Result:

Processing Gain: 12.62 dB

Note:

1. $GP = (S/No) + Mj + Lsys = 7.9 \text{ dB} + Mj + 2 \text{ dB}$
2. S = Signal Level
3. J = Signal Generator RF Output

Appendix B

Antenna Sketch

THOMSON MULTI MEDIA

DM+: 20704280

CONT ON SHEET F SH NO. 2

1111120704280
*****ANTENNA RUBBER BASE

FAMILY DESCRIPTION

ANTENNA RUBBER BASE

FIRST MADE FOR RCS100A


FILE: 20704281

TEST CIRCUIT

VSW: VOLTAGE STANDING WAVE.

VSWR: VOLTAGE STANDING WAVE RATIO

VSW & VSWR ARE TO BE MEASURED WITH THE FOLLOWING METHOD:
ELECTRICAL DELAY MUST BE COMPENSATED AT COPPER PLANE.

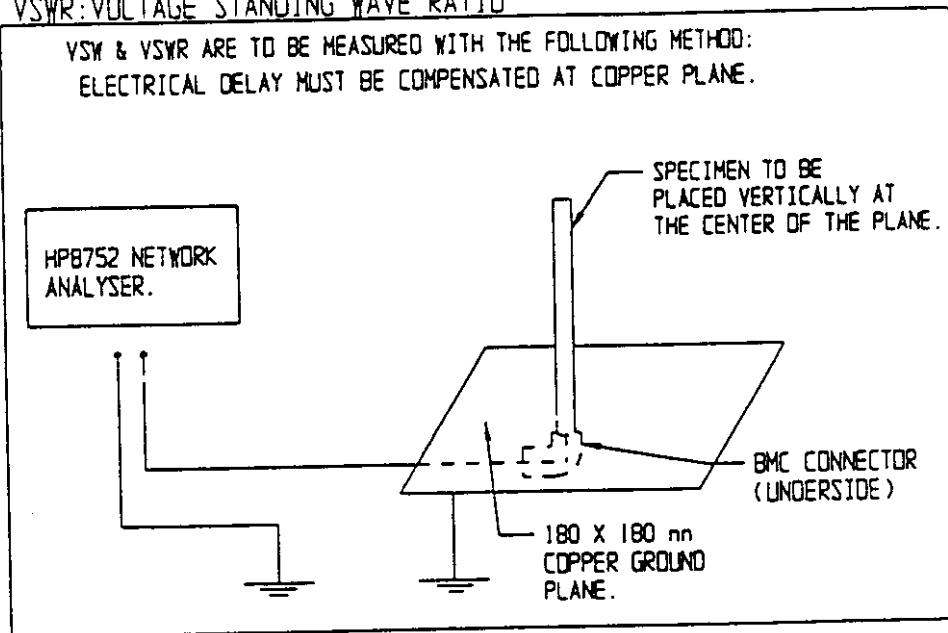

ALL REVISION SEE SHT.AA

THOMSON MULTI MEDIA

DM+: 20704310

CONT ON SHEET F SH NO. 2

20704310
ANTENNA RUBBER HANDSET

FAMILY DESCRIPTION

ANTENNA RUBBER HANDSET

FIRST MADE FOR RCS100A


FILE: 2070431E

TEST CIRCUIT

VSW: VOLTAGE STANDING WAVE.

VSWR: VOLTAGE STANDING WAVE RATIO

VSW & VSWR ARE TO BE MEASURED WITH THE FOLLOWING METHOD:
ELECTRICAL DELAY MUST BE COMPENSATED AT COPPER PLANE.

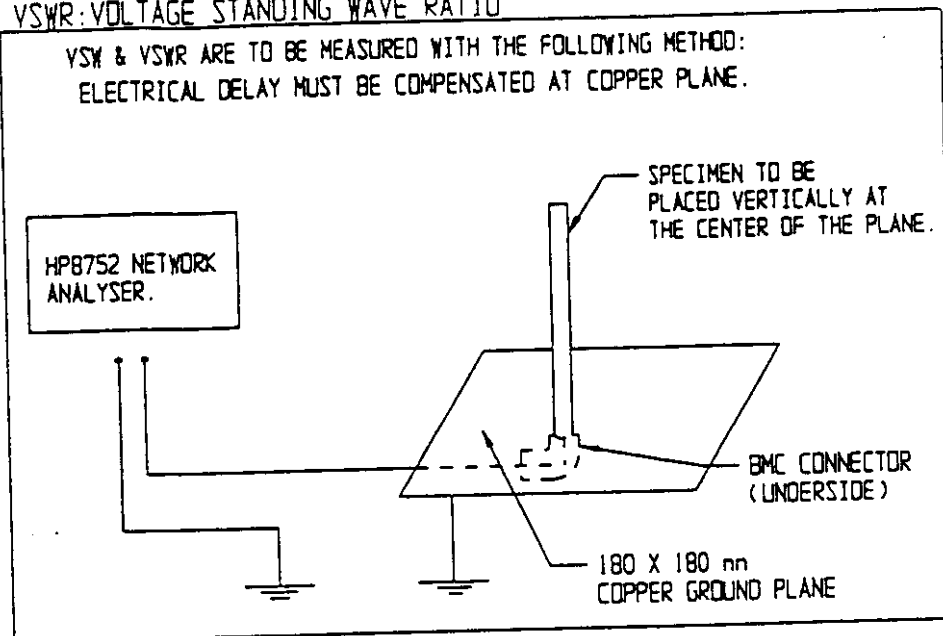

ALL REVISION SEE SHT. AA

Made By BEE KHIM

Approval

ENGINEERING

Div. or Dept

FAMILY CODE: 80604B

DM+: 20704310

THOMSON MULTI MEDIA

DM+: 20704310

CONT ON SHEET 2 SH NO 1

20704310
ANTENNA RUBBER HANDSET

FAMILY DESCRIPTION


ANTENNA RUBBER HANDSET

FIRST MADE FOR RCS100A

FILE: 2070431A

TOCOM PT# 20716040 (NSB46-H900-GE14-B-01) 天 76913
TOCOM PT# 20808050 (NSB46-H900-GE14-G-01) 天

- NOTES: 1) FREQUENCY RANGE: 885 TO 931 MHz (APPLICATION). $\diamond$
2) IMPEDANCE: 30 OHM $\pm$ 10 OHM. $\diamond$
3) V.S.W.R: LESS THAN 2.5:1 $\diamond$
4) GAIN(dBi): UNITY
5) RADIATION PATTERN: OMNI-DIRECTIONAL
6) POLARIZATION: VERTICAL
7) RESONANCE FREQUENCY: 720 $\pm$ 2% MHz (SEE SHT 2 FOR FIXTURE AND METHOD). $\diamond$
8) PULLING STRENGTH: LESS THAN 3kgf
9) SWIVEL TORQUE: LESS THAN 3kgf
10) TEMPERATURE: -30°C TO +60°C

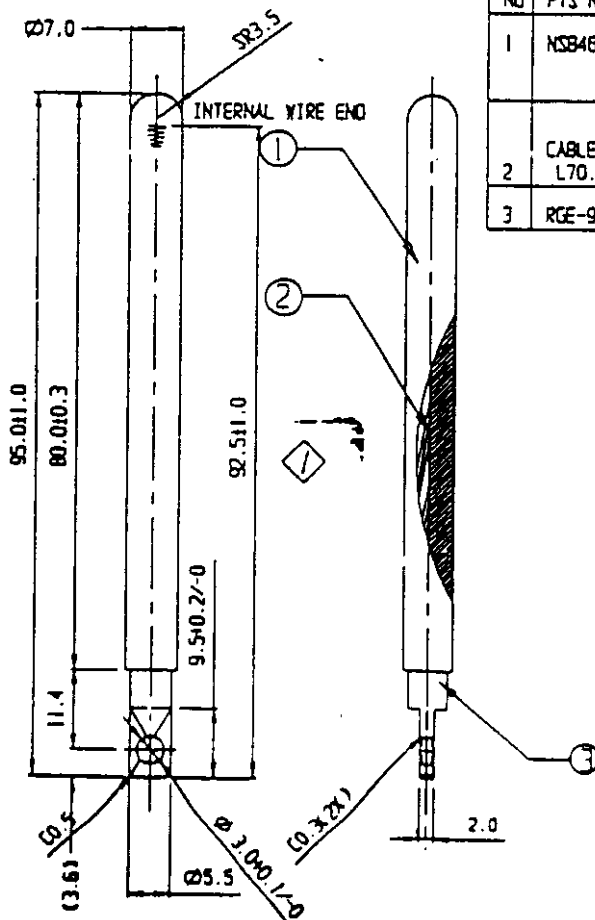

NO	PTS NAME	NAME	MATERIAL	FINISH	QTY	COLOR	
						20716040	20808050
1	NSB46	PIPE	POLYURETHANE		1	BLACK	FRESH IVORY 8052
2	CABLE L70.5		STEEL WIRE		1	BLACK	FRESH IVORY 8052
3	RCE-9001	METAL ROD	BRASS	NI PLATED	1		

TOLERANCE: $\pm$ 0.1, UNLESS OTHERWISE SPECIFIED.

ALL REVISION SEE SHT AA

Made By BEE KHIM

Approval

ENGINEERING

Div. or Dept

FAMILY CODE: 60604B

DM+: 20704310

Appendix C

The antenna of the device is screwed inside the device, the user can not remove it freely without any tools from outside the device. This is comply with the FCC rules part 15.203

Appendix D

Security Code

Description of 900 MHz Direct Spectrum Cordless Phone

The subject device's 20 independent channels, autoscans at link establishment and smart channel hopping combine to find the clearest channels at all times, automatically.

Spread spectrum technology ensures the highest level of security available in a cordless phone.

The spread spectrum technique provides better security than other solutions since only the receiver has a copy of the pre-assigned spreading code, making interception virtually impossible. The transmitting signal is diluted over a large bandwidth with power density at any point being very light, so the signal goes unnoticed by other systems since they are not tuned to receive it. Moreover the scrambling code changes every 8 times the phone is parked, and there are millions of codes.

Scrambler / Descrambler A 16-code randomizes the voice and supervisory data for transmission and reception, more than 64K scramble codes are available from the 16-bit maximal length pseudo-noise sequence generator.

Spread Spectrum Spreader Each transmitted bit is multiplied with a 12-chip spreading code, meeting FCC Part 15.247 requirements.