


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.23 dBm VBW 1 MHz
25 dBm 2.40202104 GHz SWT 5 ms Unit dBm

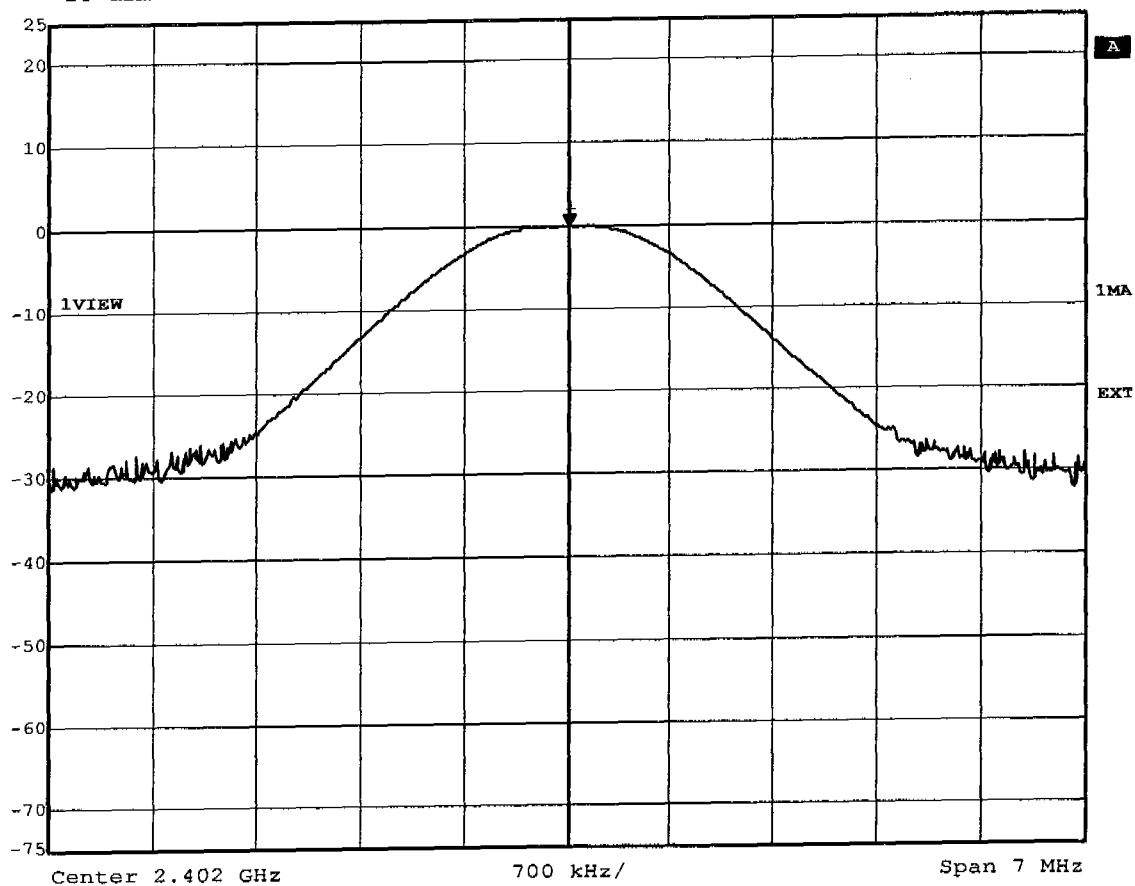

Title: Peak Output Power conducted Ch.: 0
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 11:36:38




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.61 dBm VBW 1 MHz
- 25 dBm 2.44102104 GHz SWT 5 ms Unit dBm

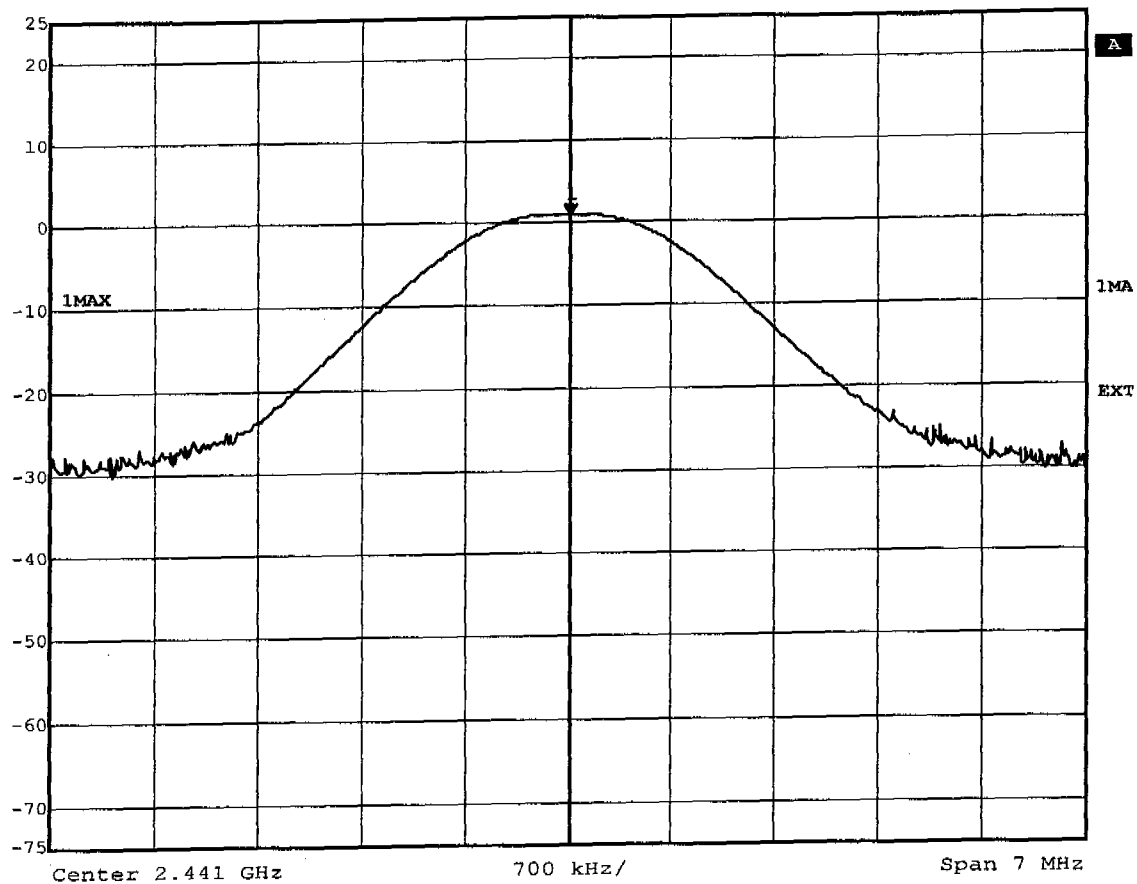

Title: Peak Output Power conducted Ch.: 39
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 11:43:13




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.97 dBm VBW 1 MHz
.25 dBm 2.48004910 GHz SWT 5 ms Unit dBm

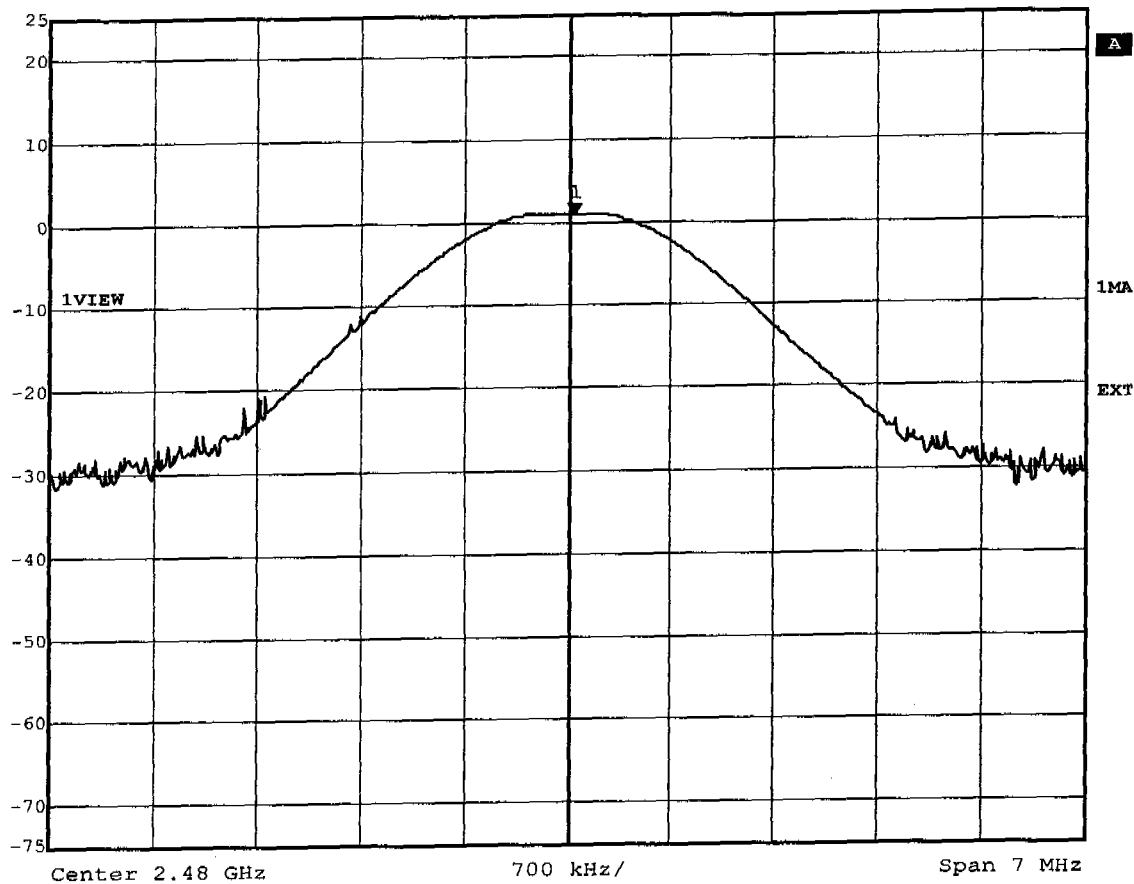

Title: Peak Output Power conducted Ch.: 78
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 11:46:58


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -14.47dBm, RBW: 5MHz

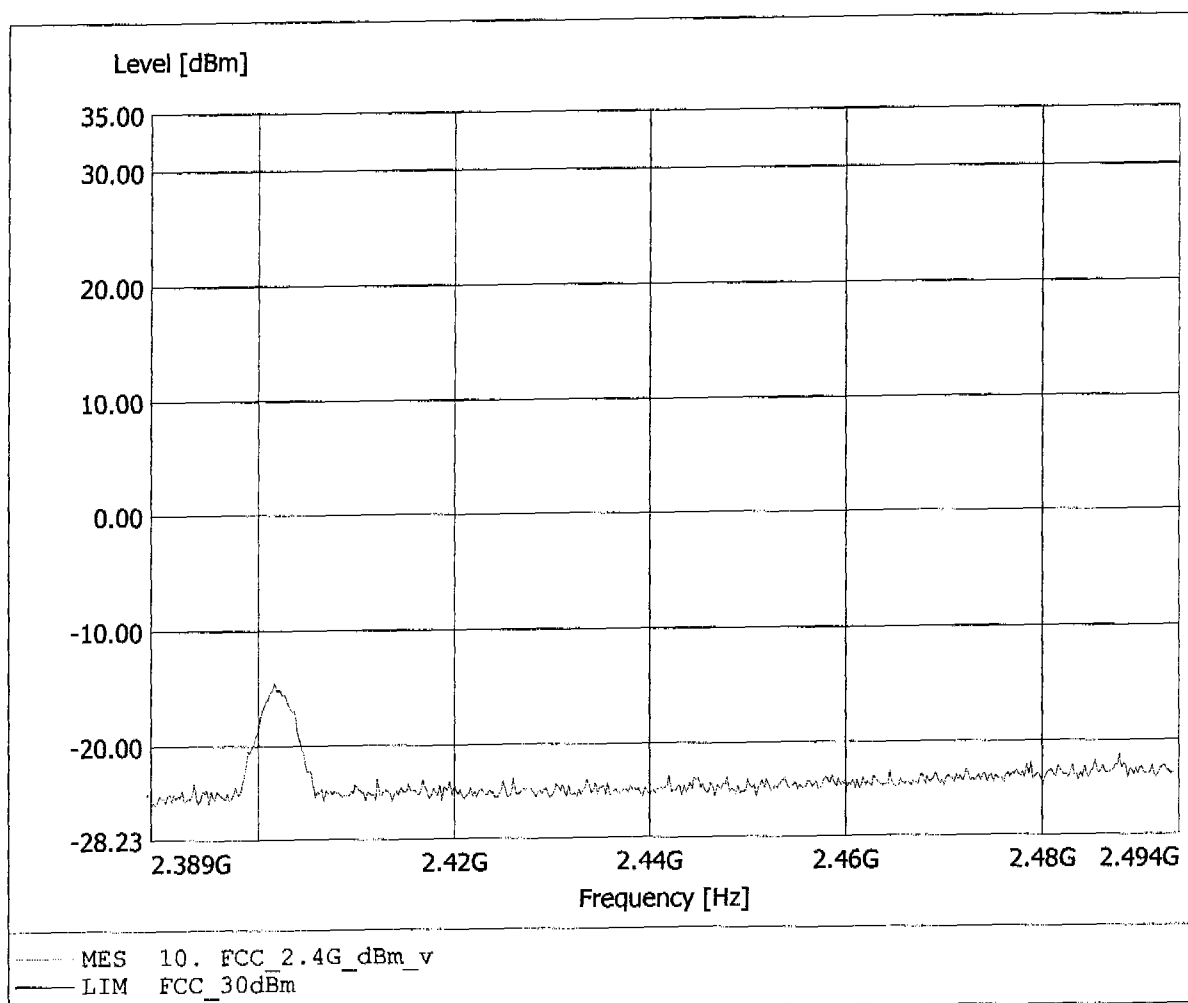


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.14dBm, RBW: 5MHz

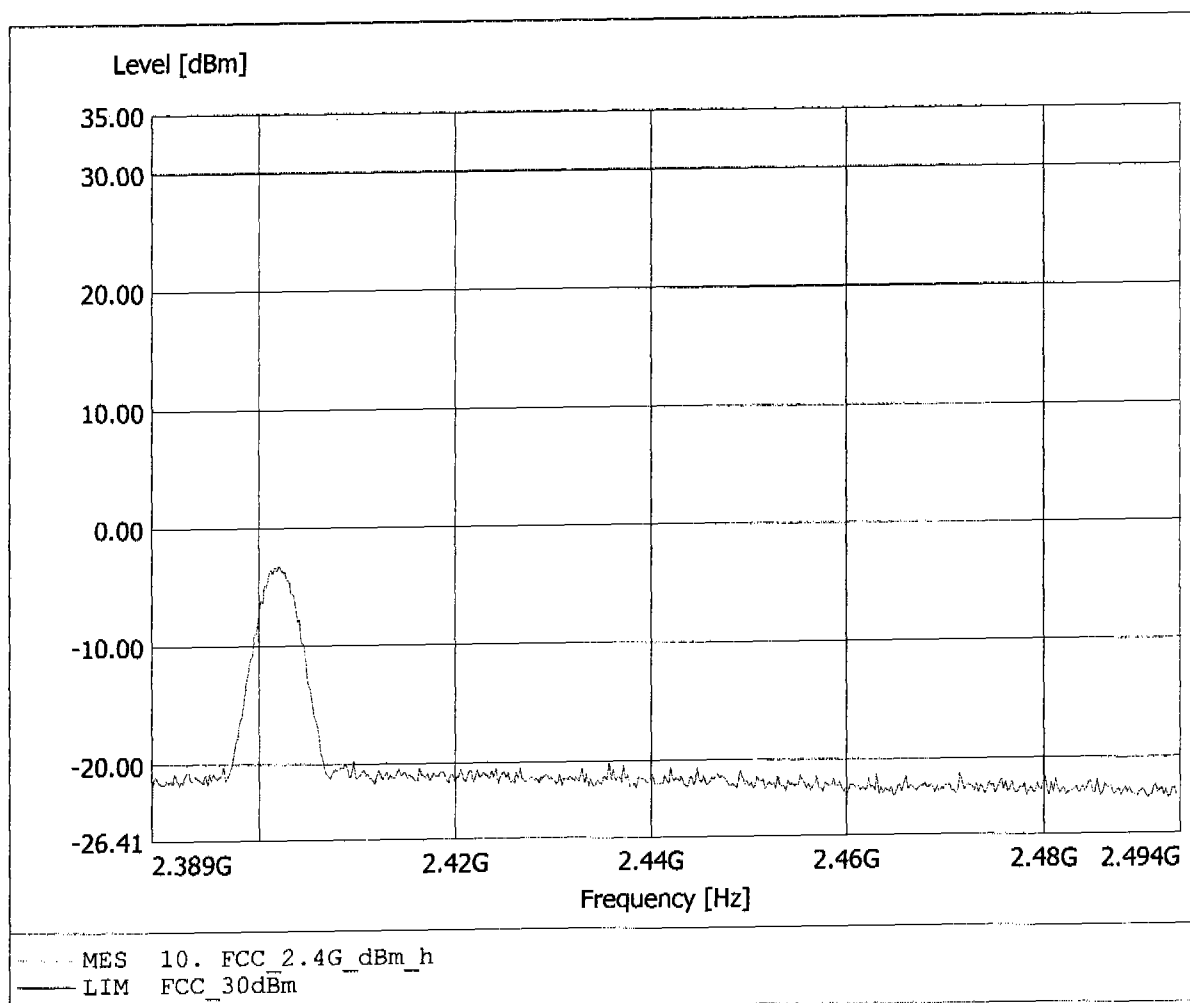


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -10.57dBm, RBW: 5MHz

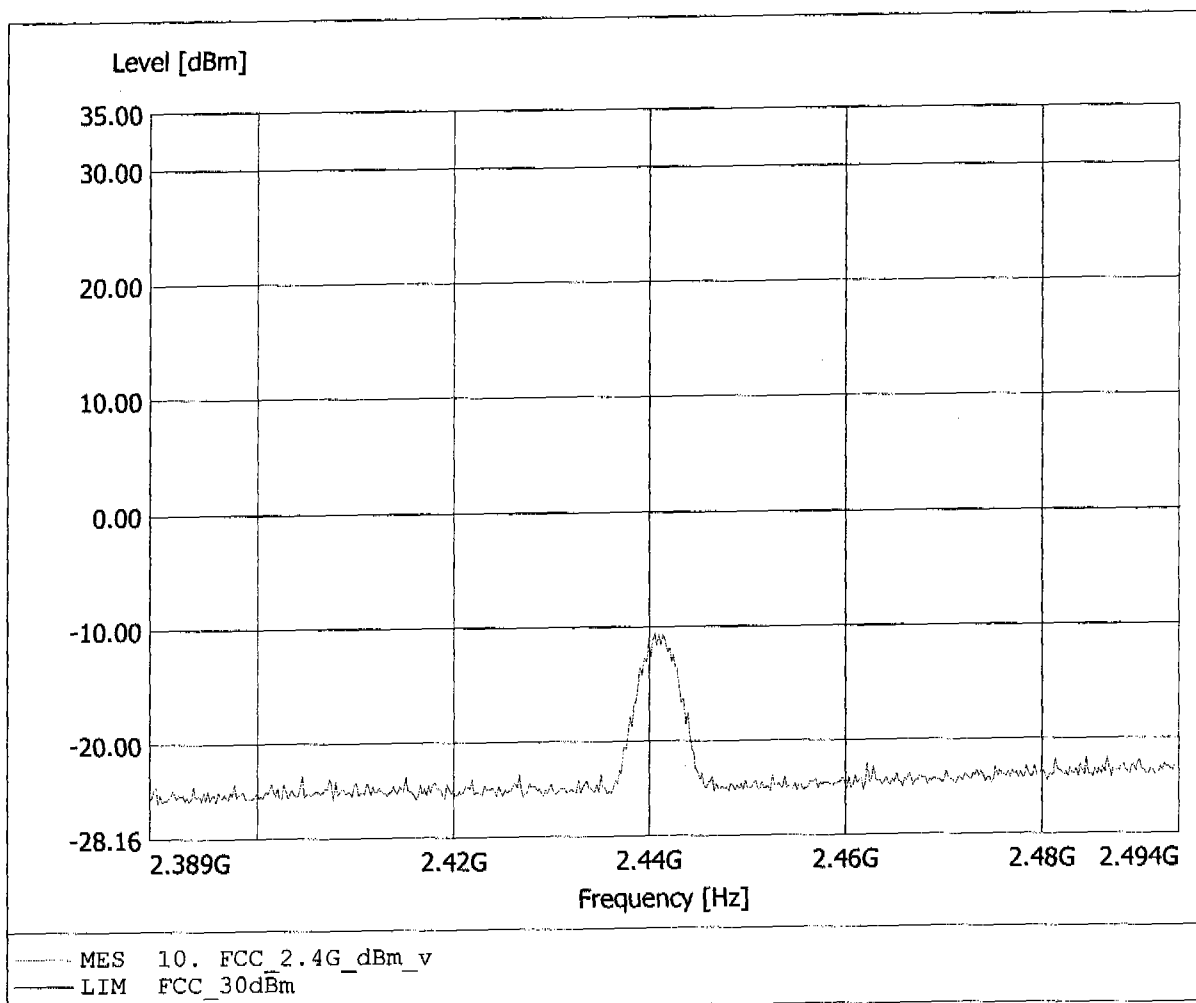


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -3.02dBm, RBW: 5MHz

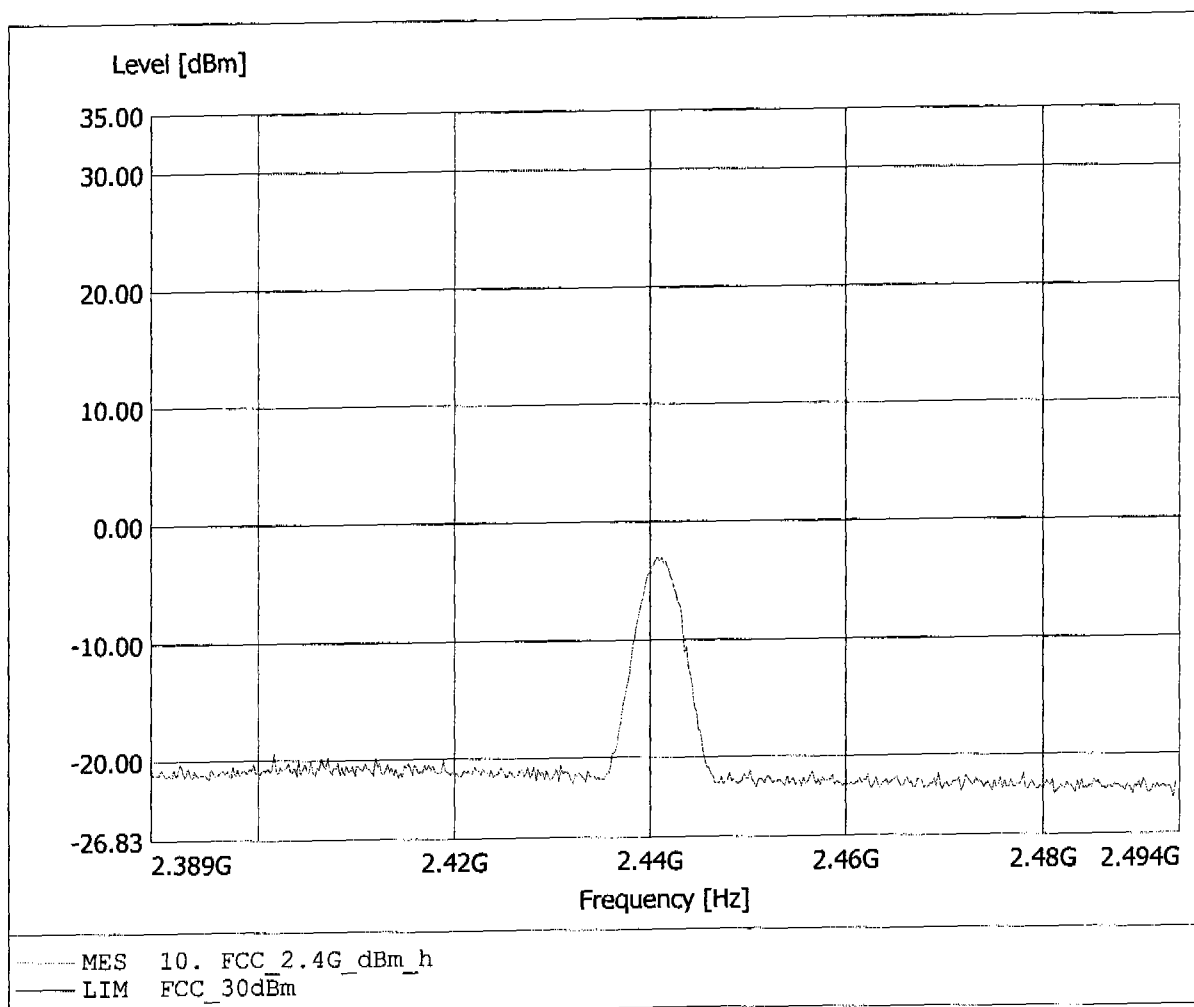


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -7.34dBm, RBW: 5MHz

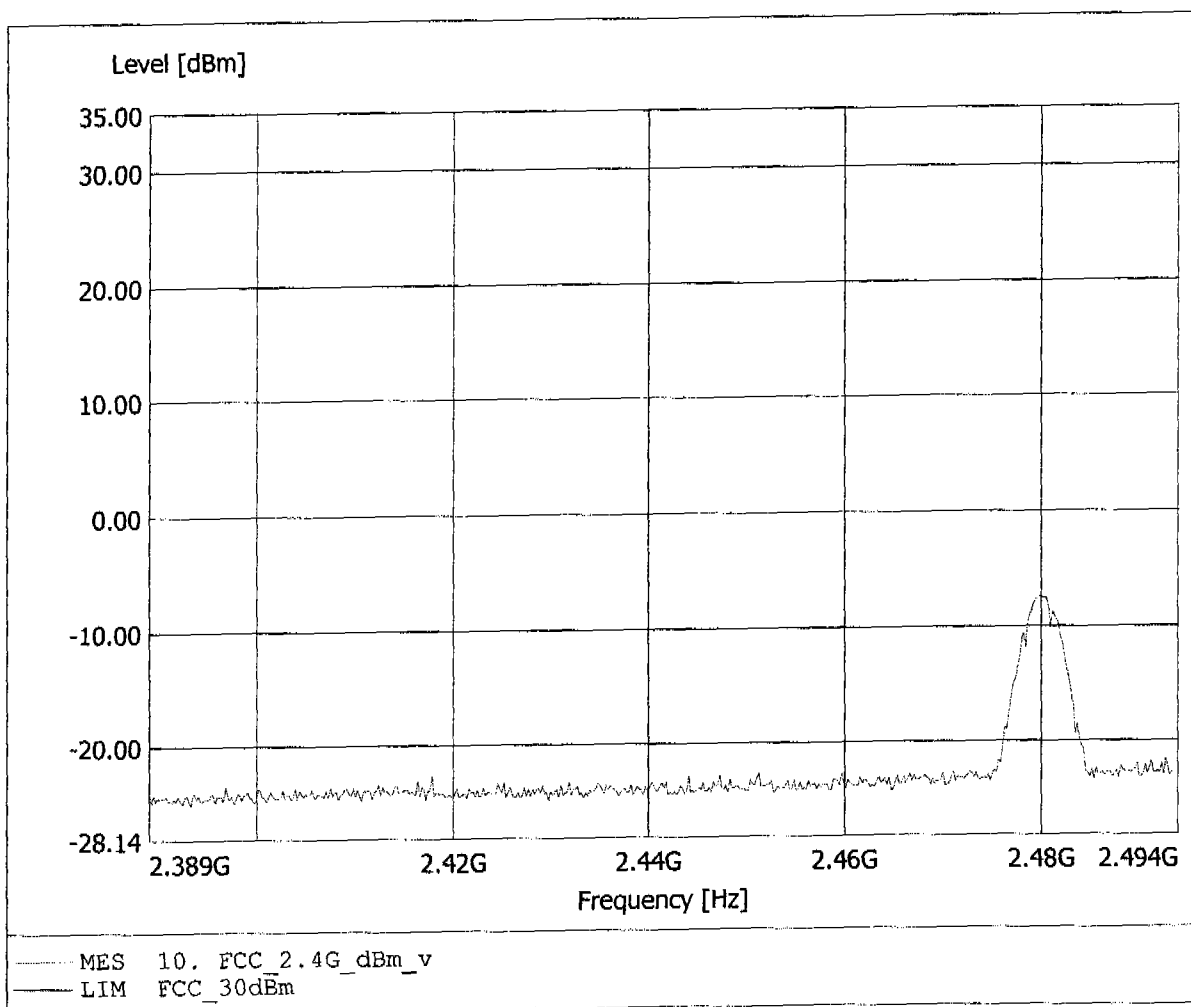


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.69dBm, RBW: 5MHz

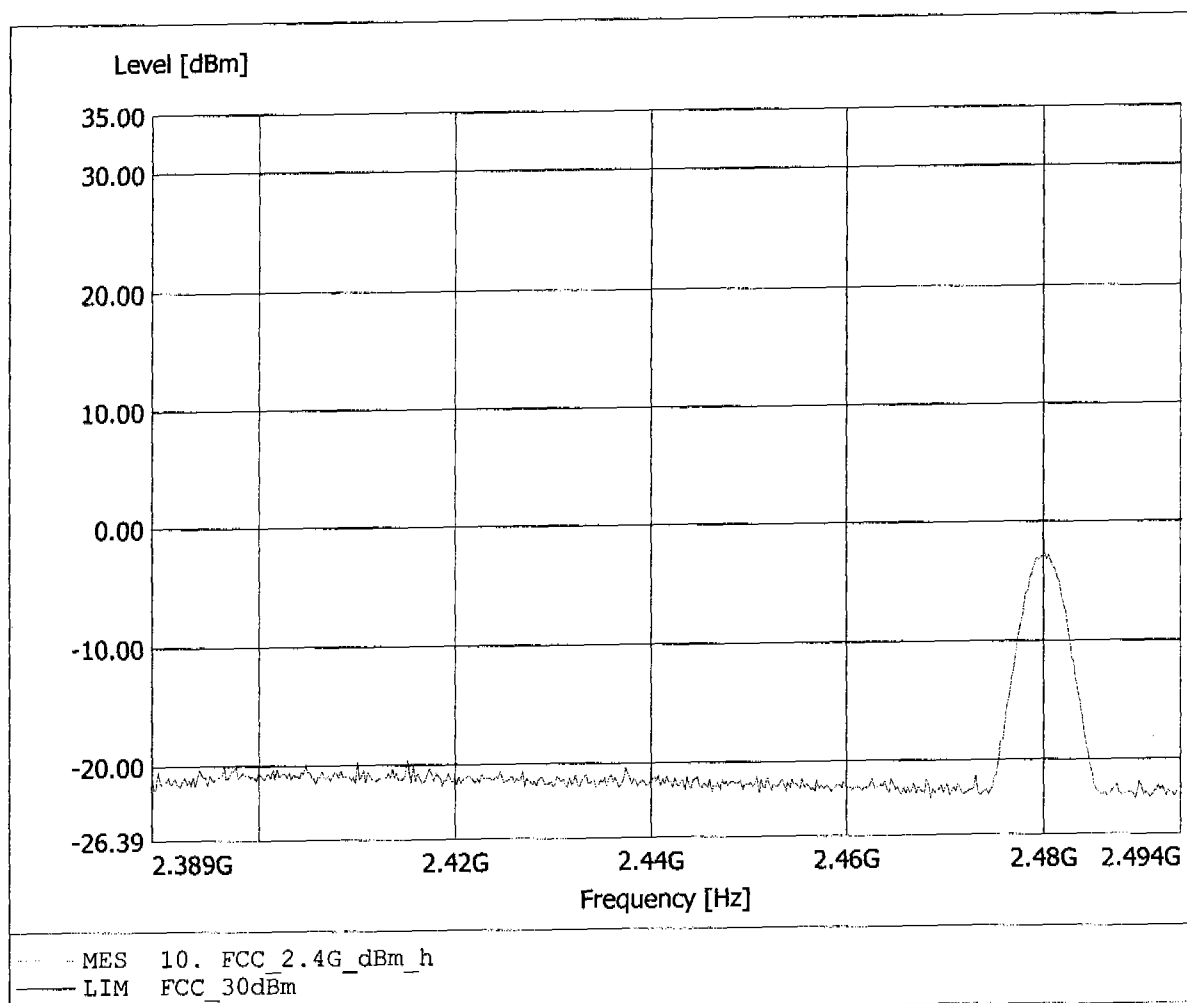


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -14.98dBm, RBW: 5MHz

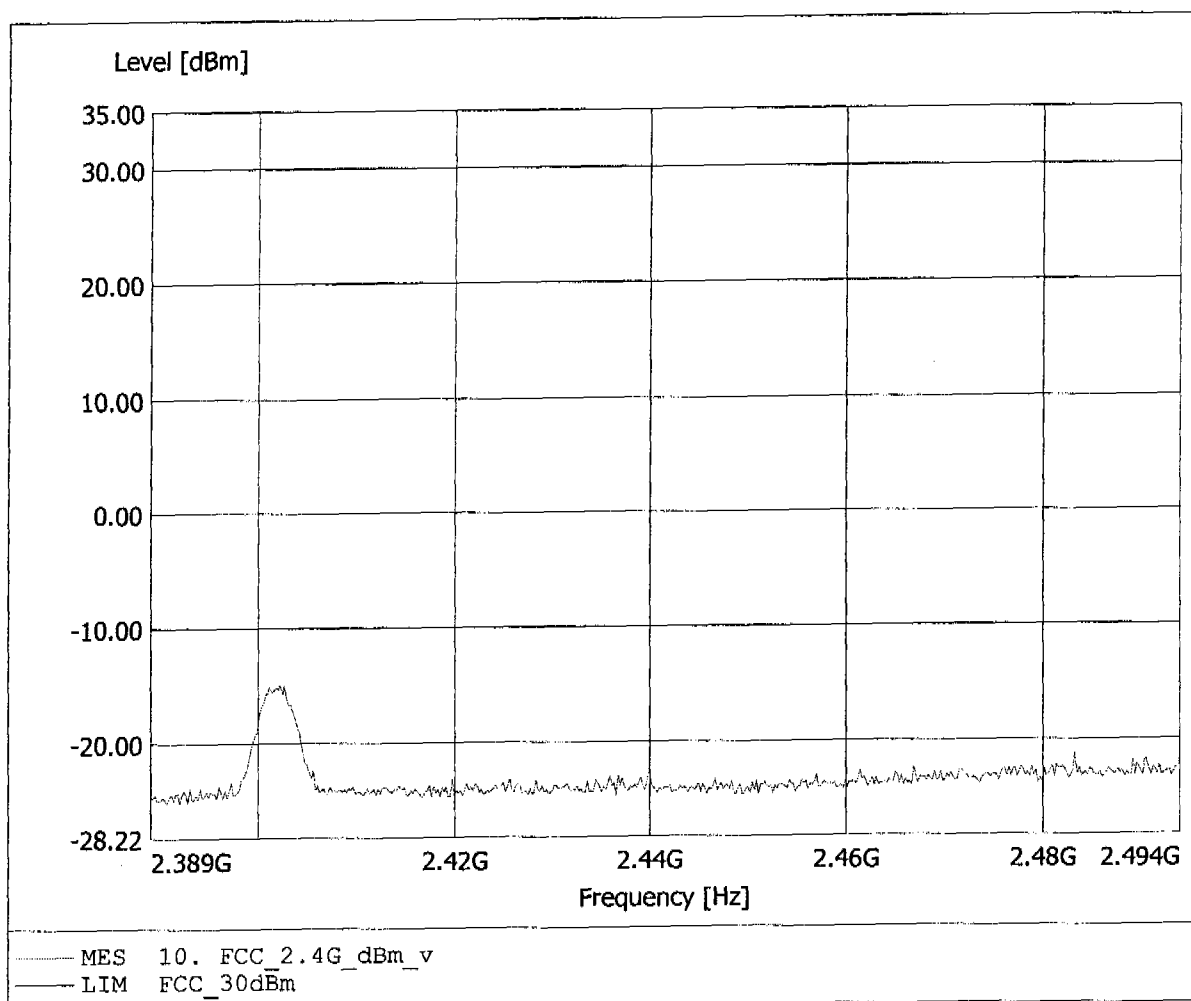


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.36dBm, RBW: 5MHz

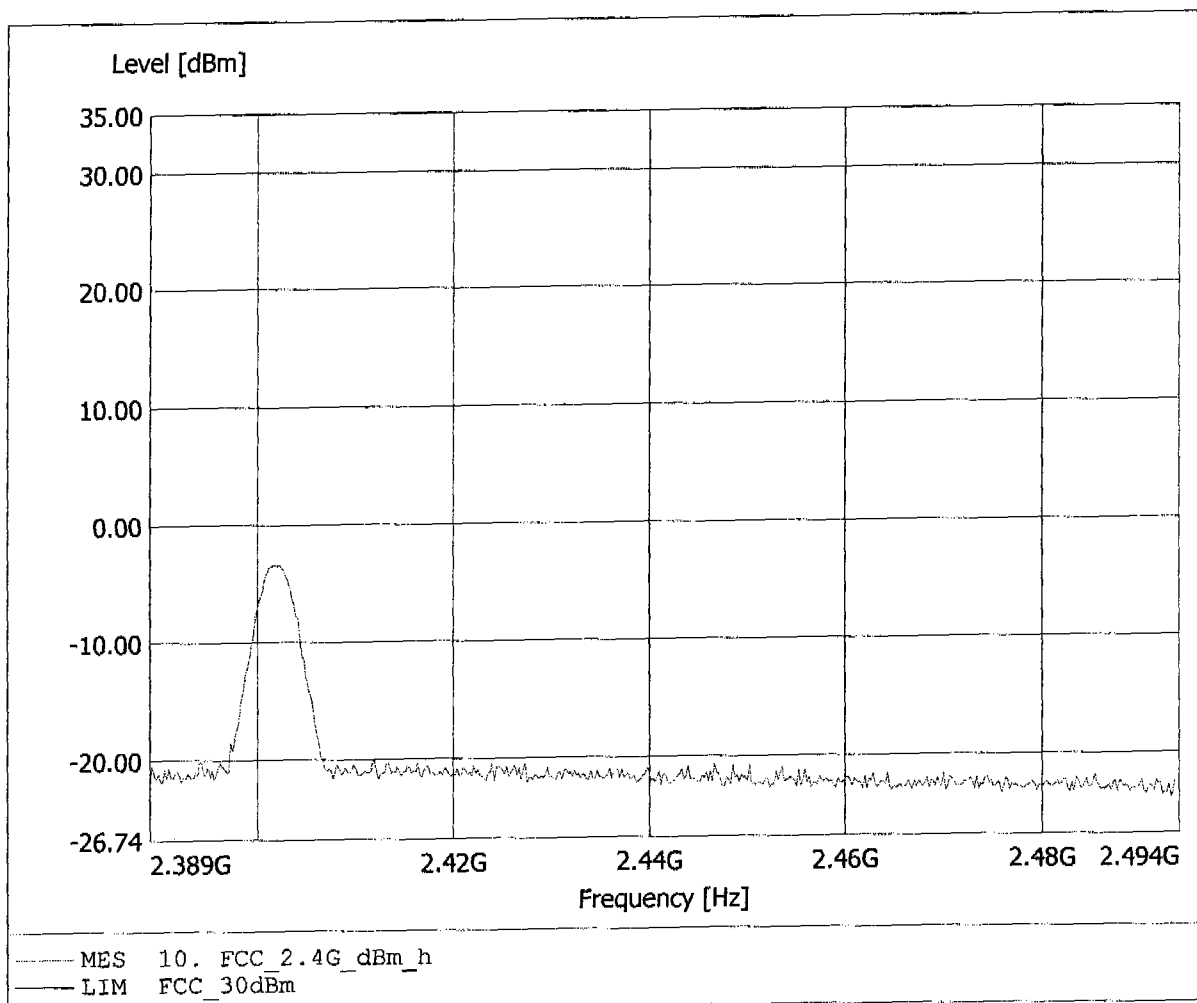


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -10.61dBm, RBW: 5MHz

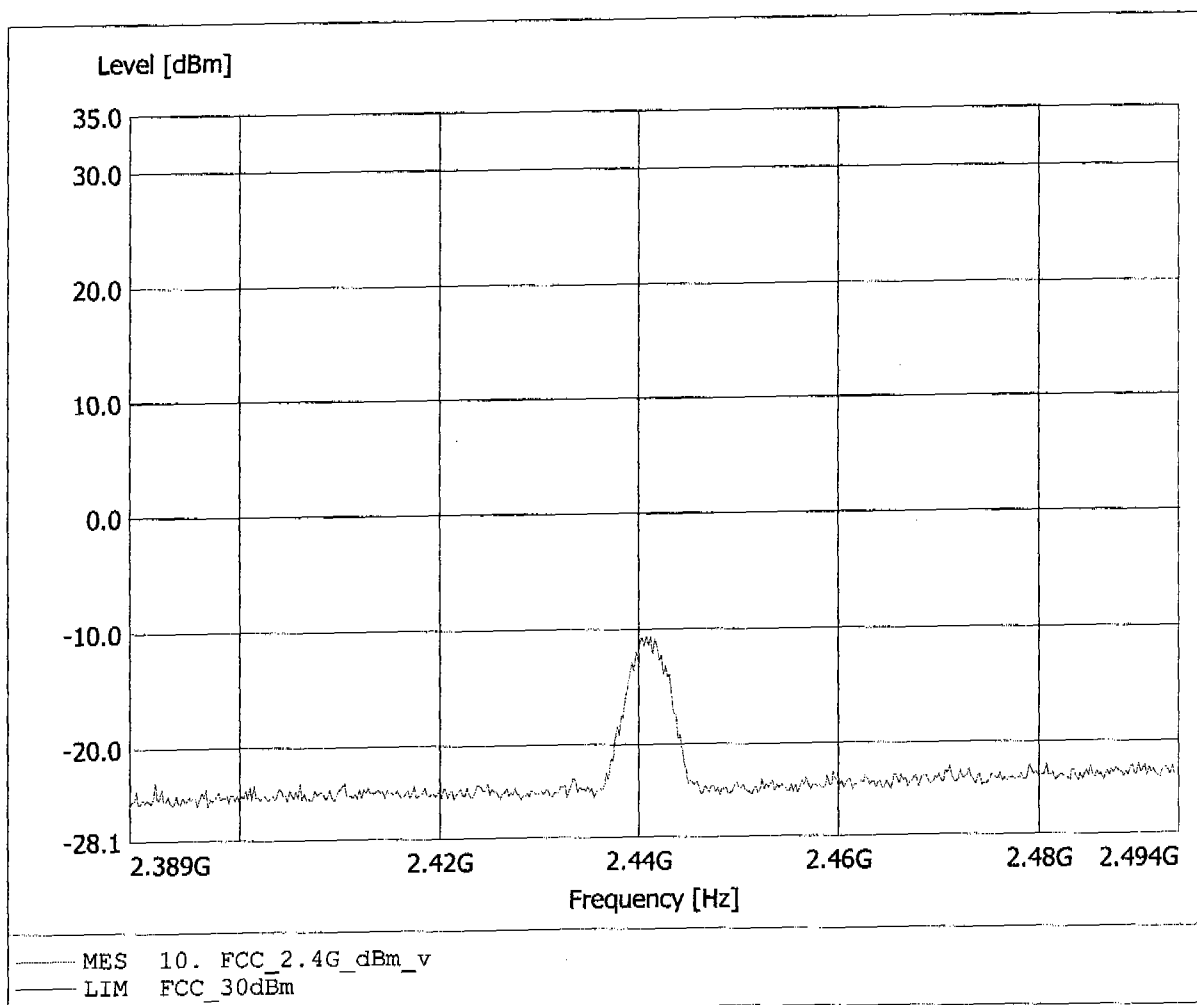


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.98dBm, RBW: 5MHz

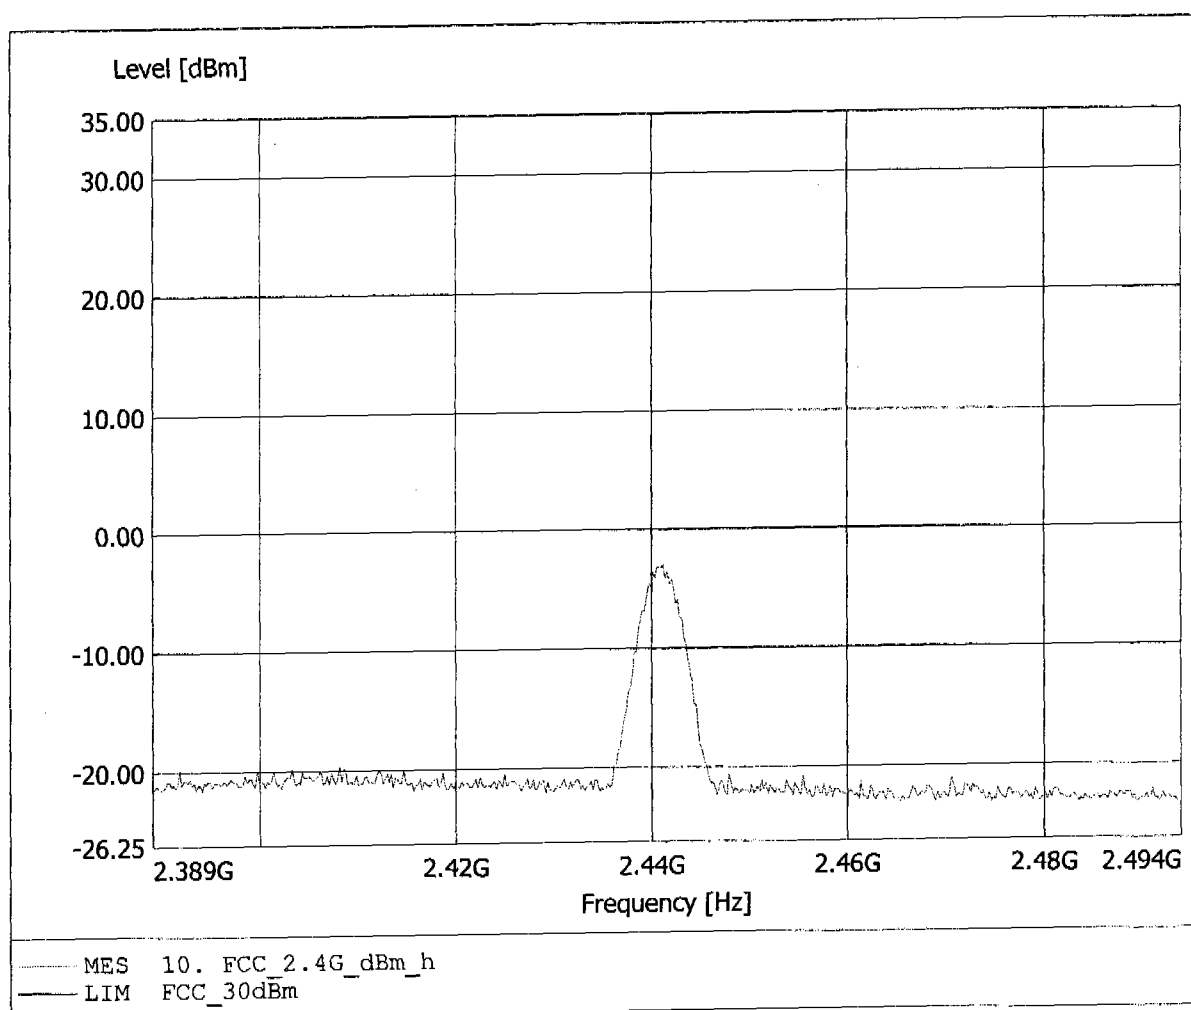


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -7.33dBm, RBW: 5MHz

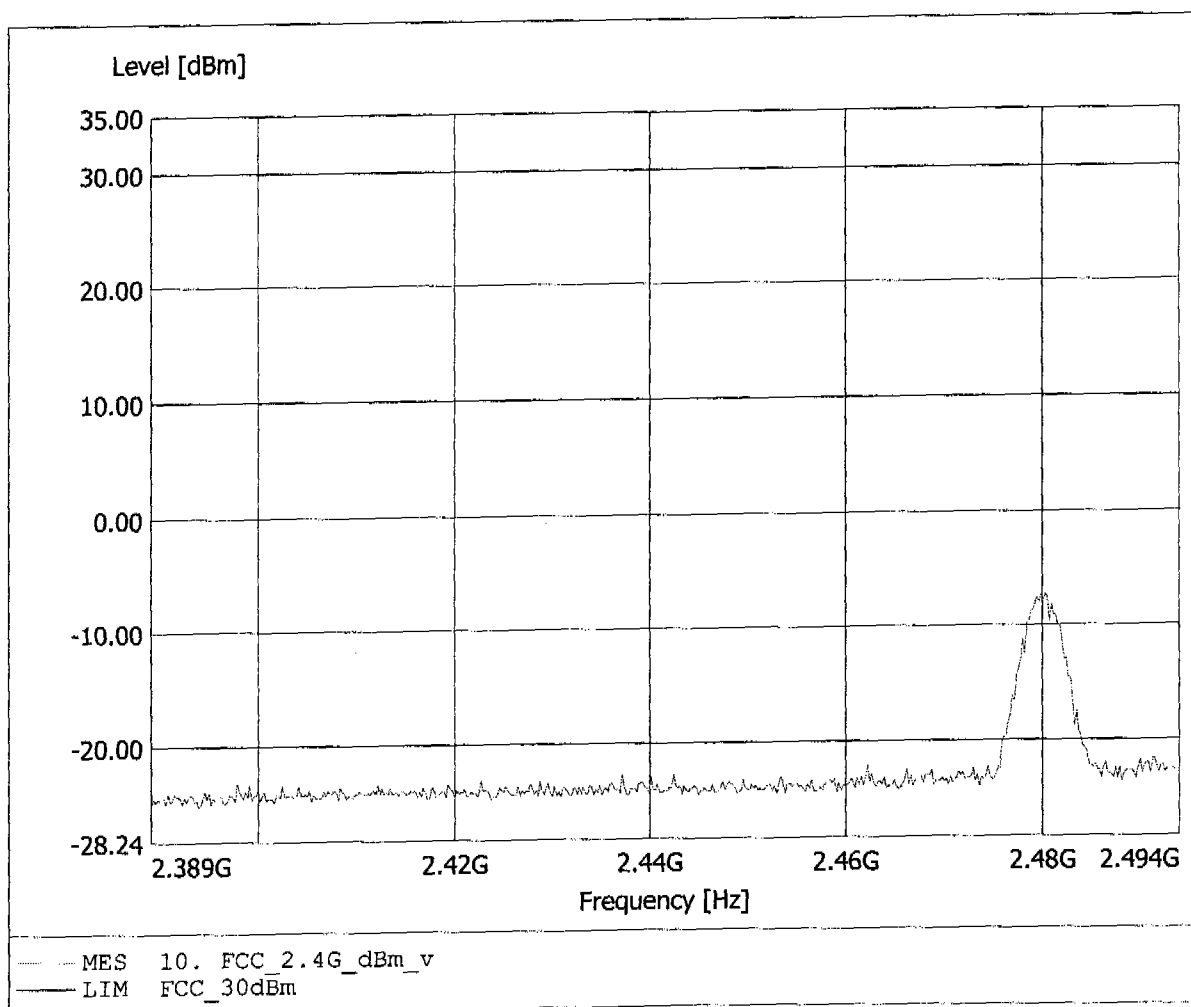


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.56dBm, RBW: 5MHz

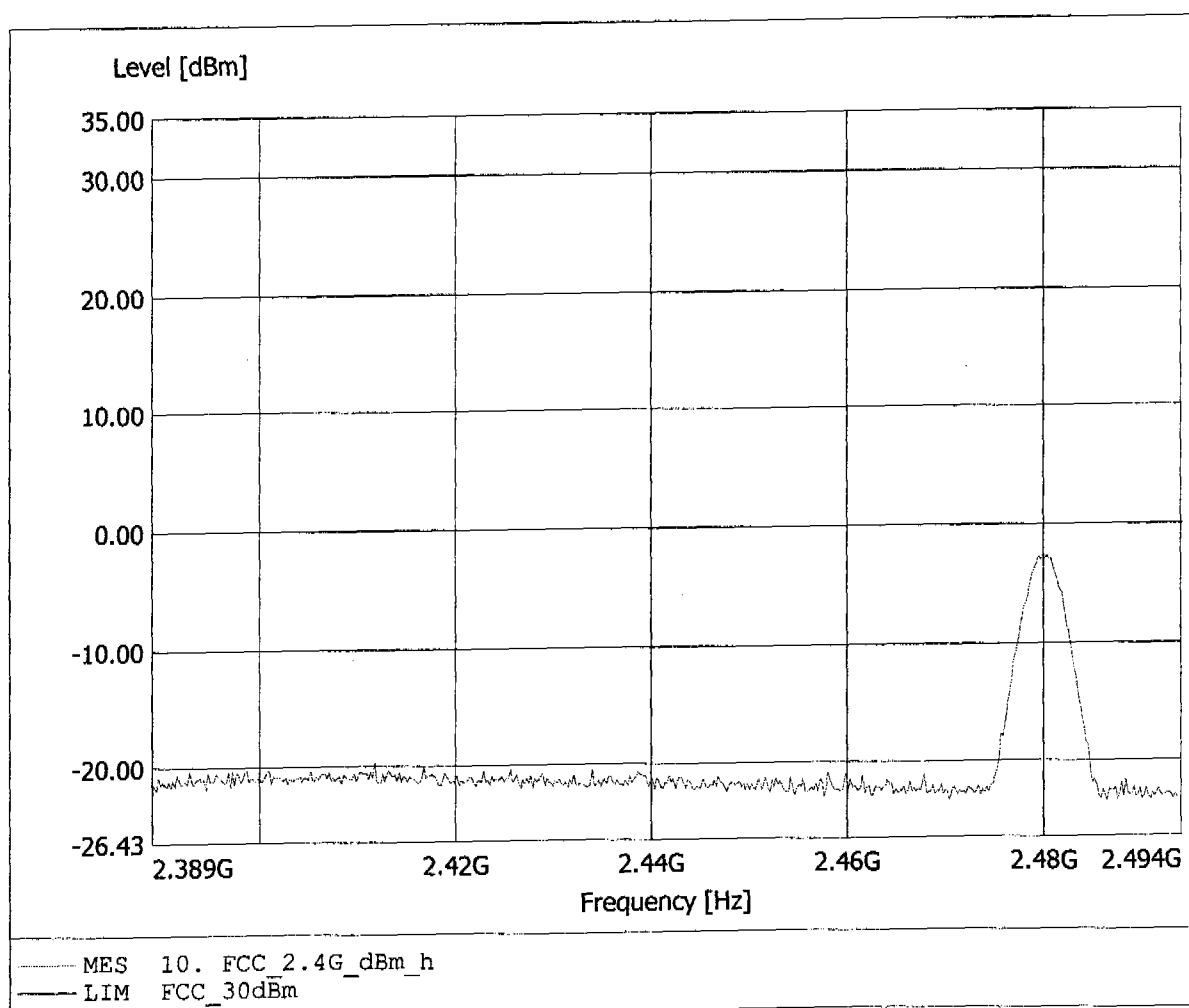


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -14.94dBm, RBW: 5MHz

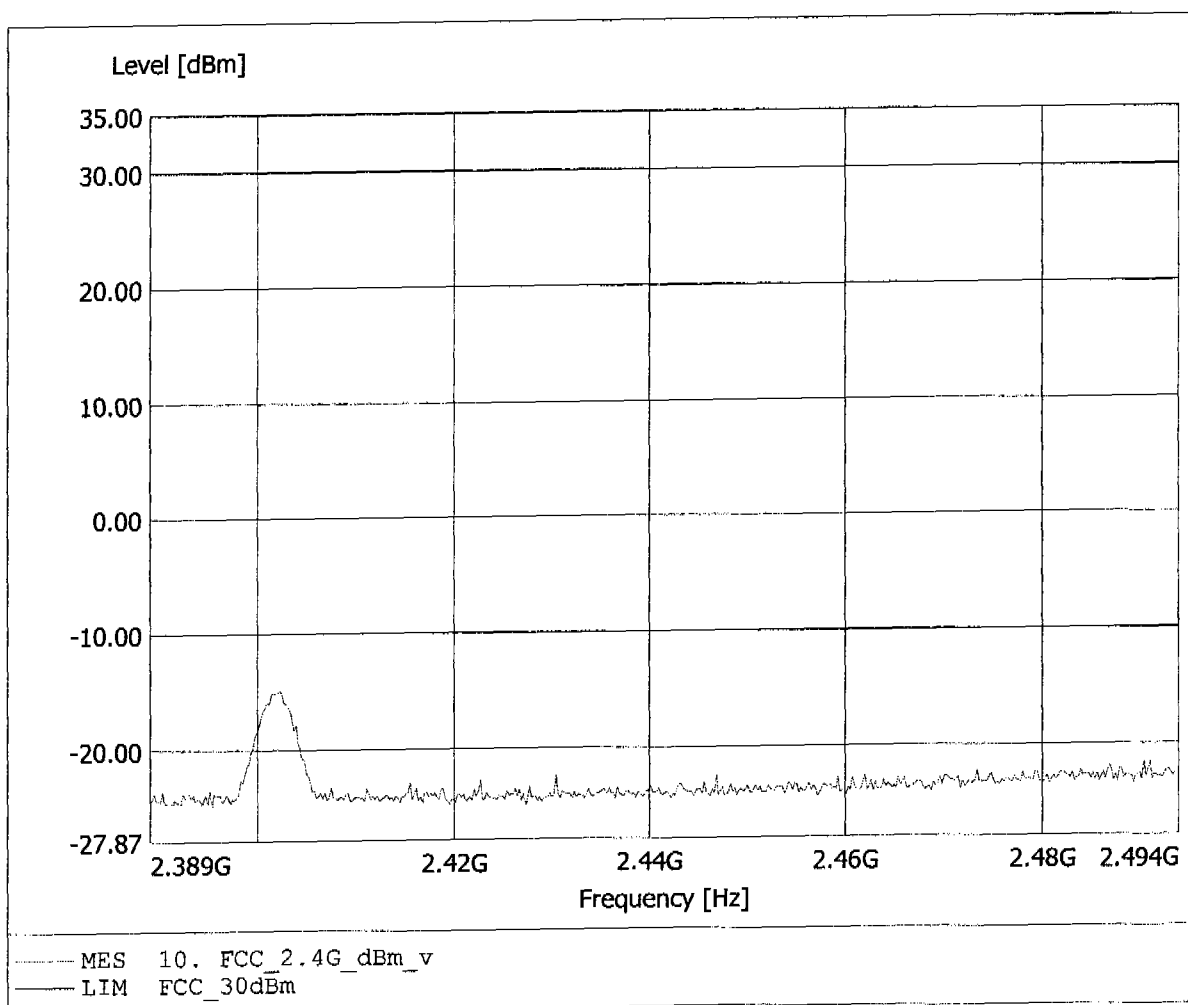


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.10dBm, RBW: 5MHz

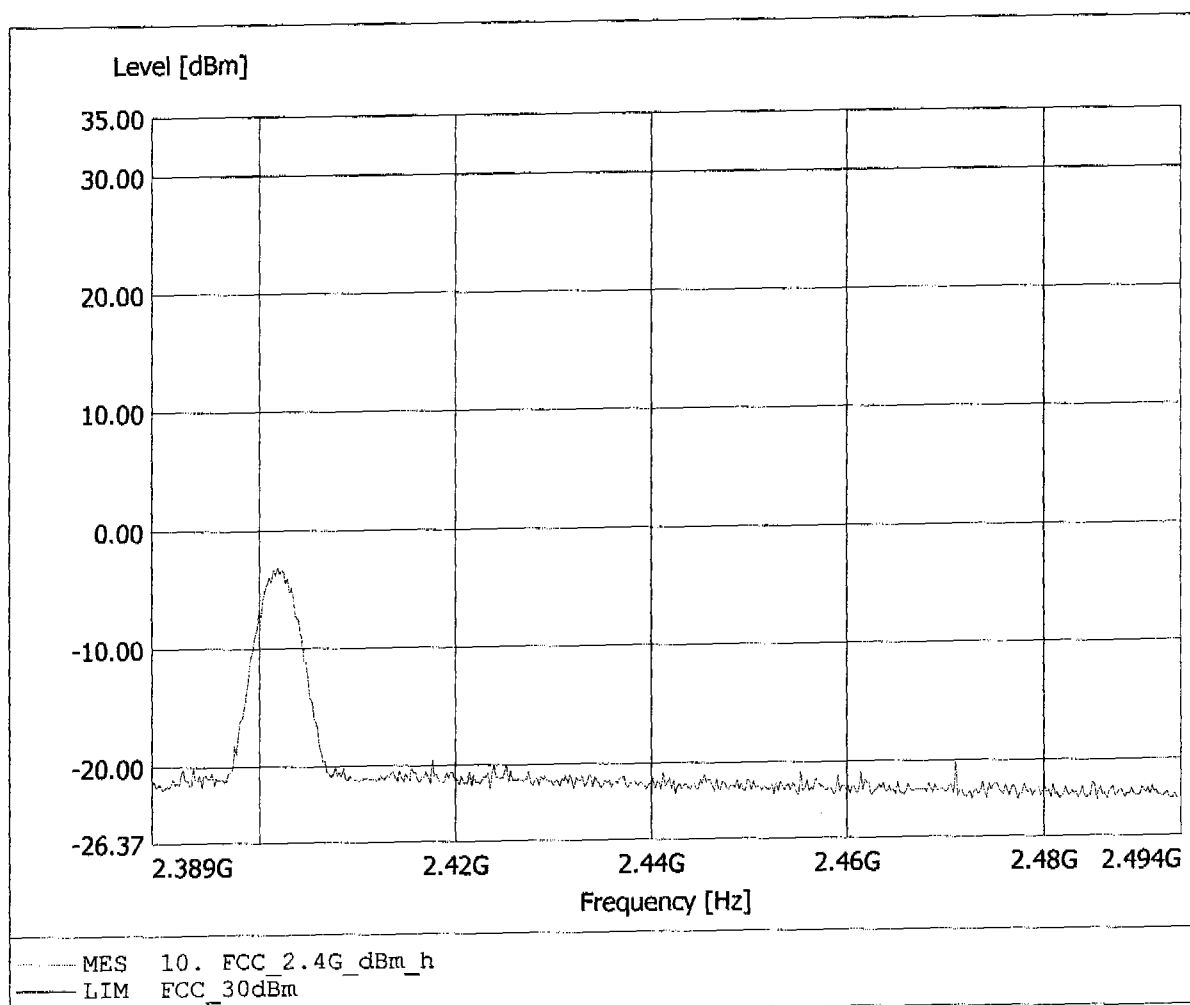


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -10.59dBm, RBW: 5MHz

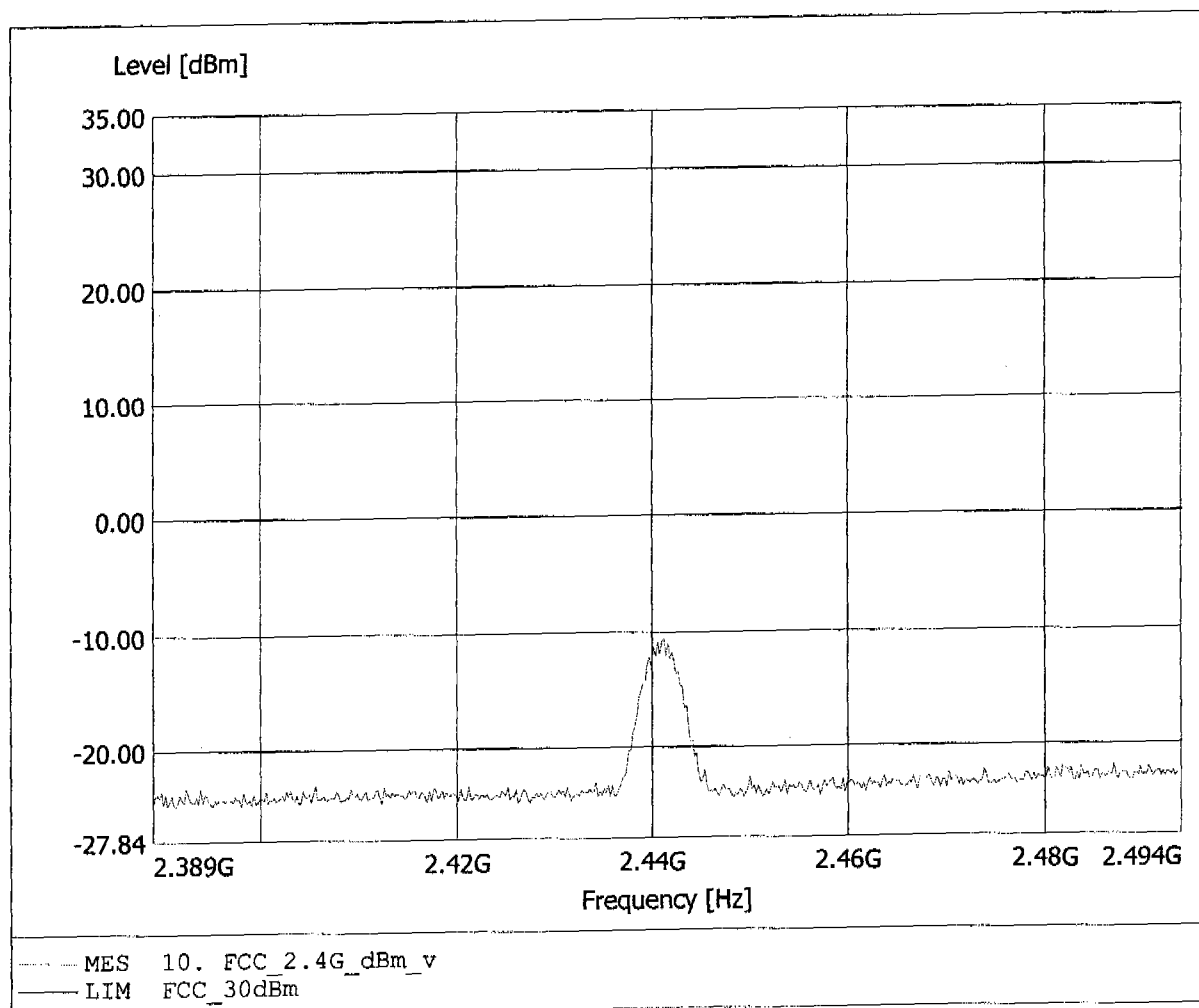


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -3.00dBm, RBW: 5MHz

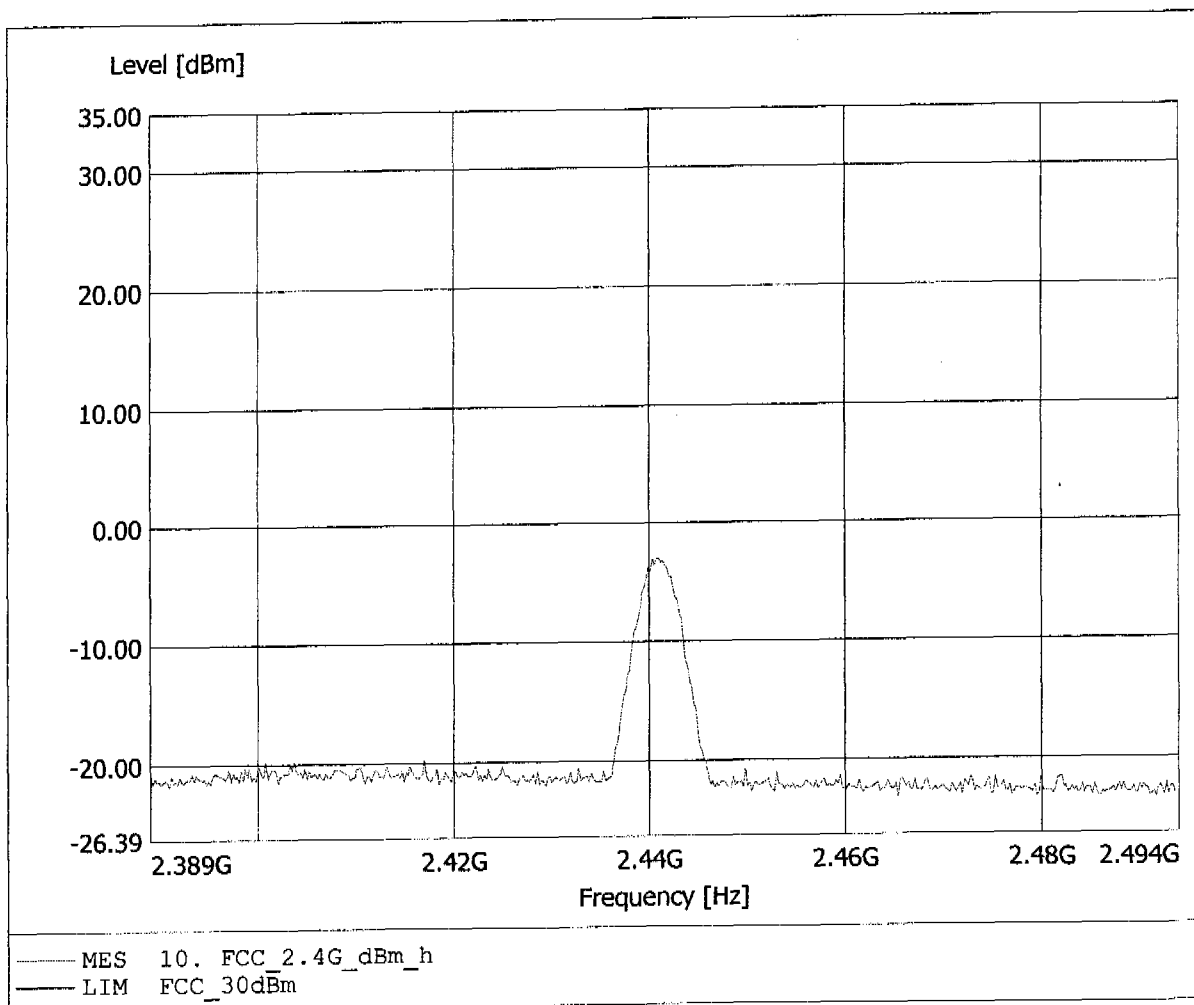


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -7.12dBm, RBW: 5MHz

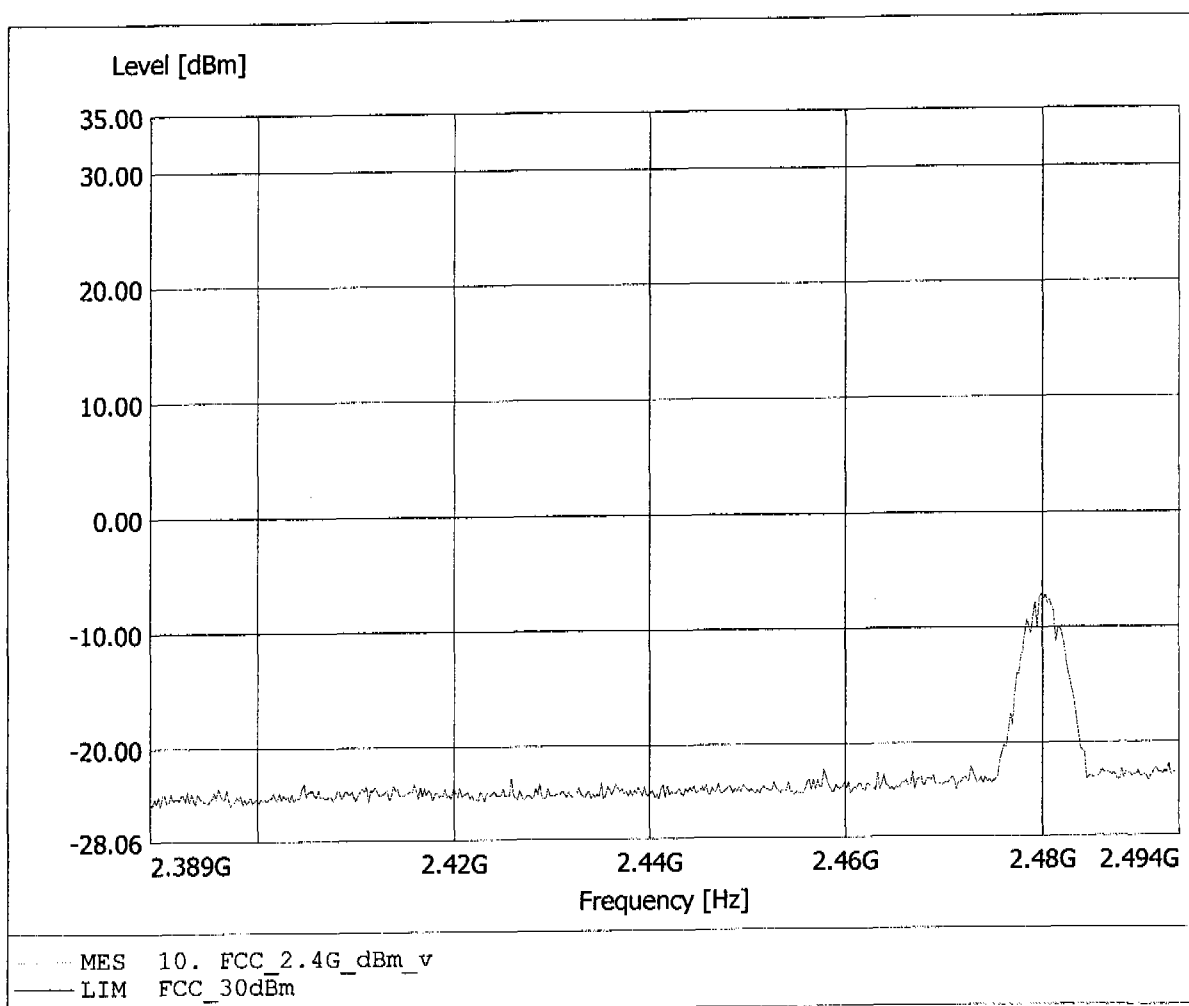

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
 Model: HSTNH-C01C / Pmax / 2480 MHz
 Manufacturer: COMPAL ELECTRONICS, INC.
 Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V-15% AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.480GHz, Pmax: -2.64dBm, RBW: 5MHz

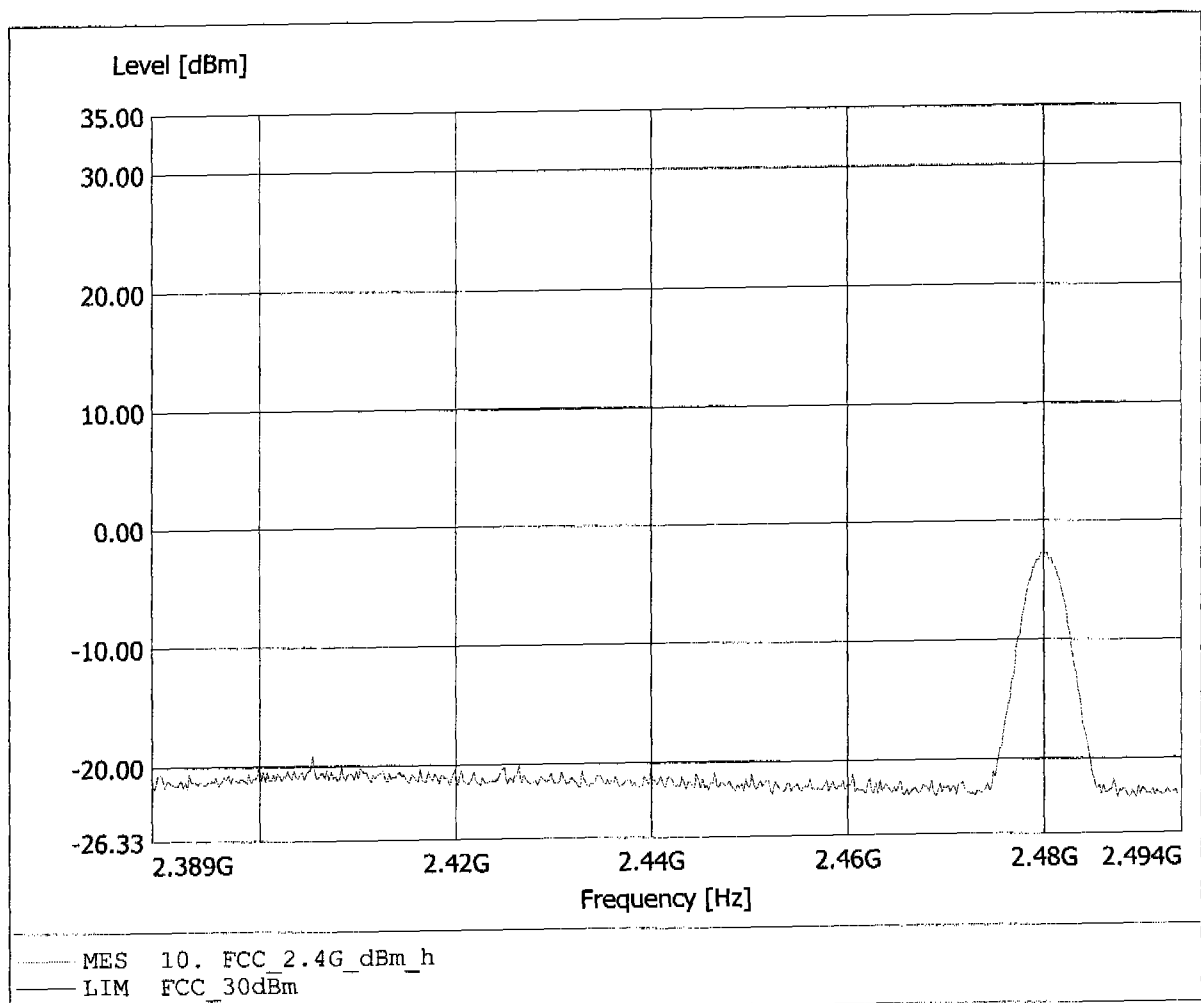


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 90.22dBµV/m, RBW: 100kHz

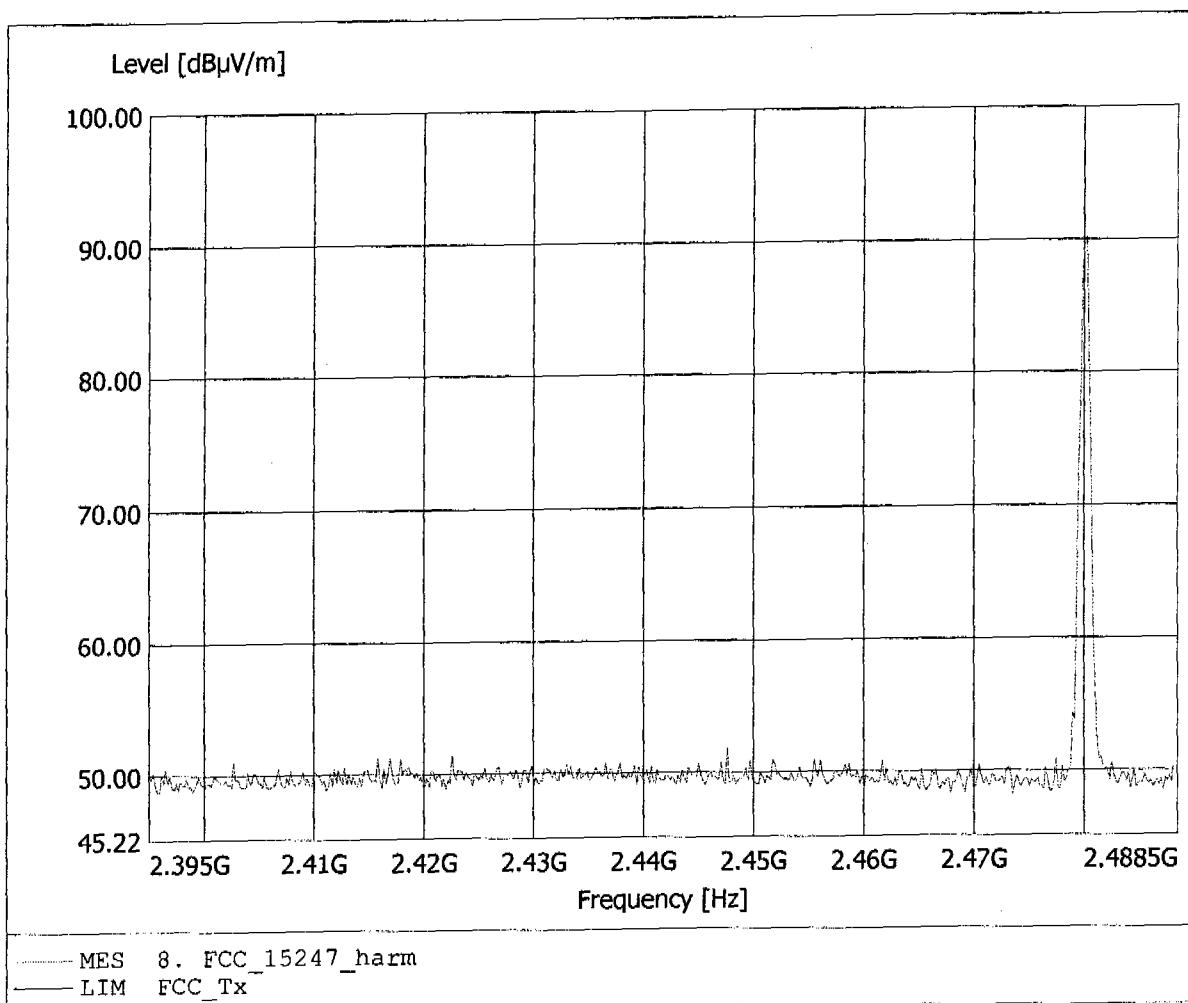


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Emax: 29.72dBμV/m, RBW: 100kHz

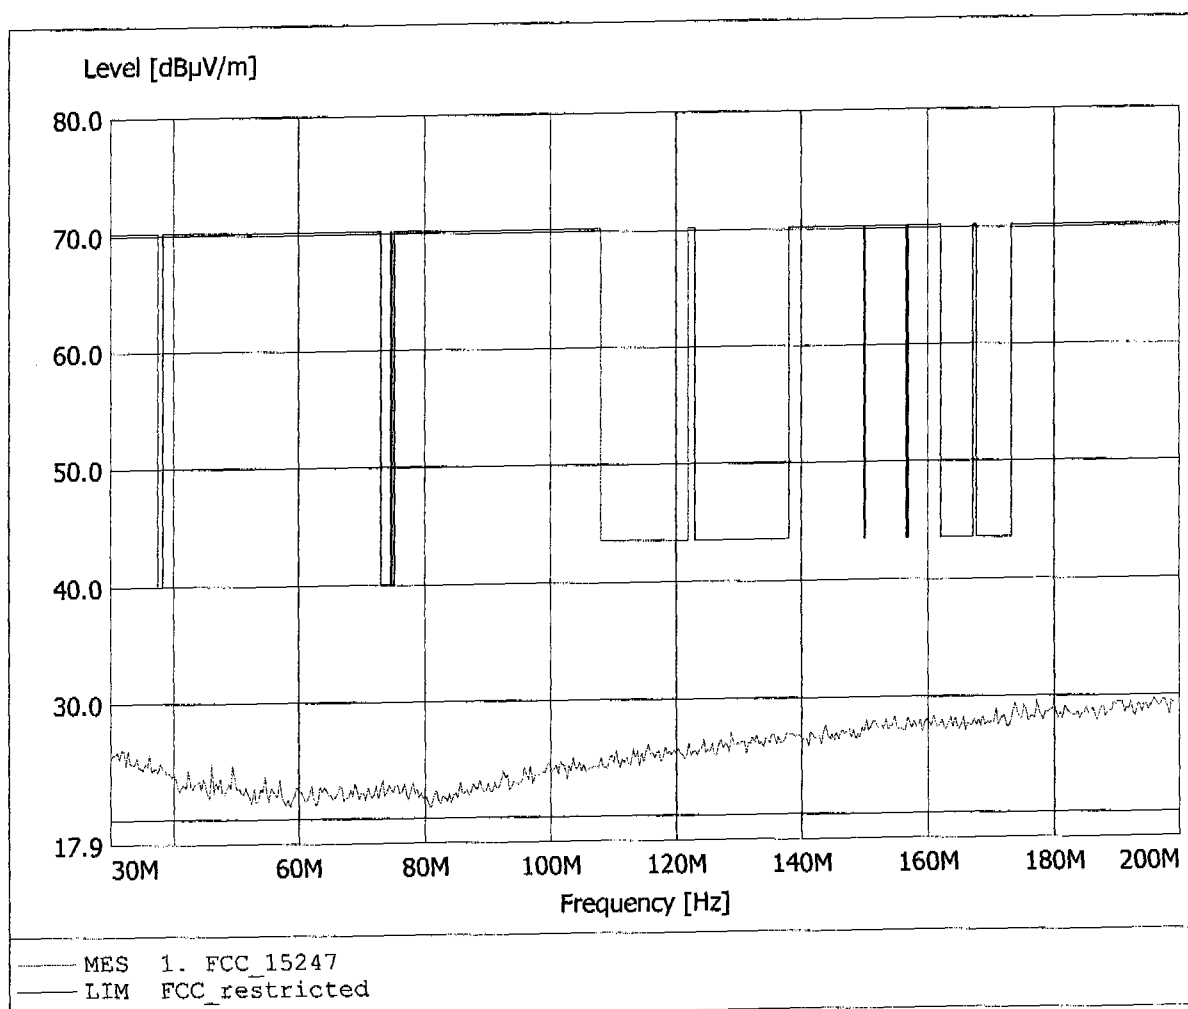


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 30.53dBµV/m, RBW: 100kHz

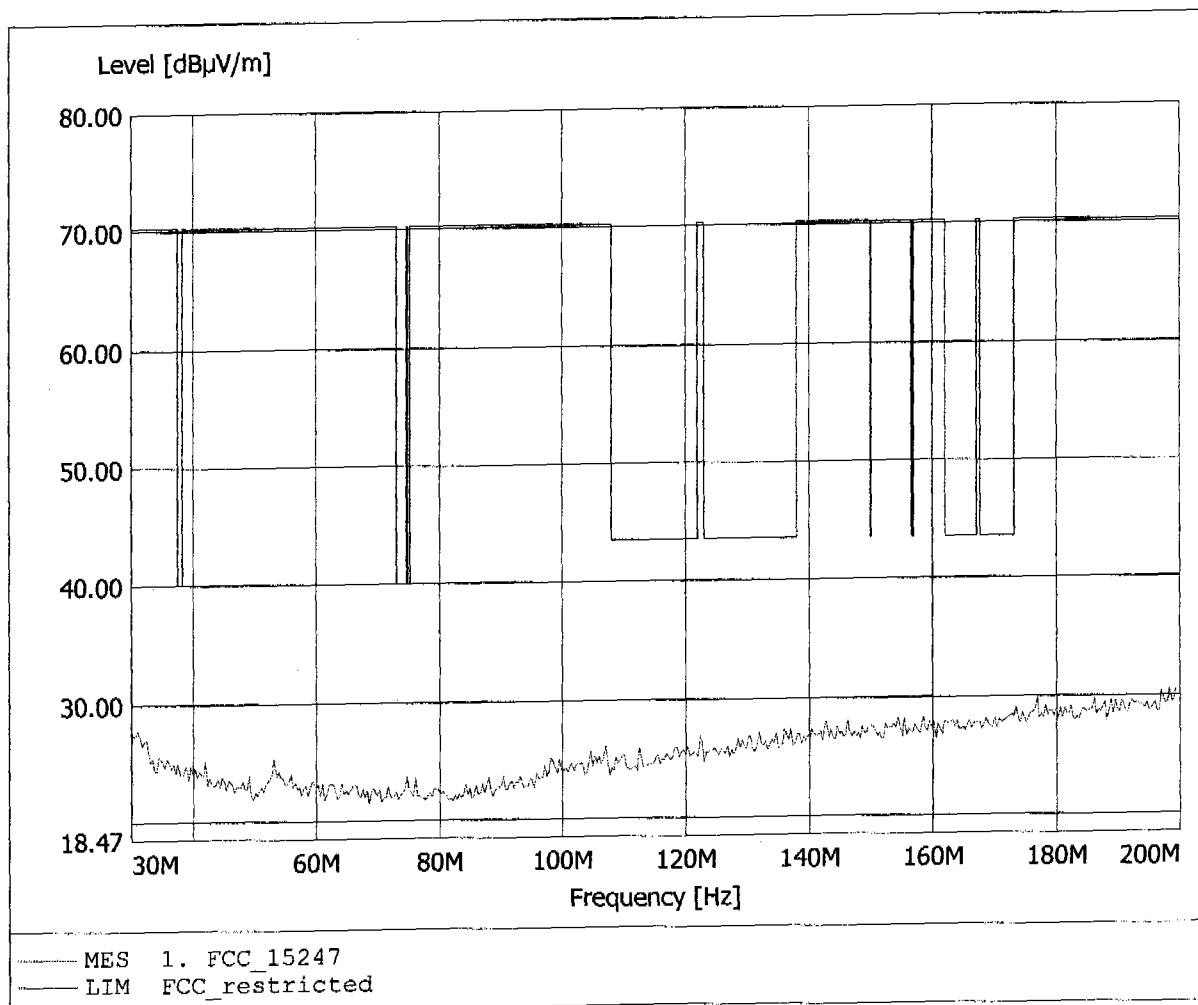


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 879.760MHz, Emax: 21.25dBµV/m, RBW: 100kHz

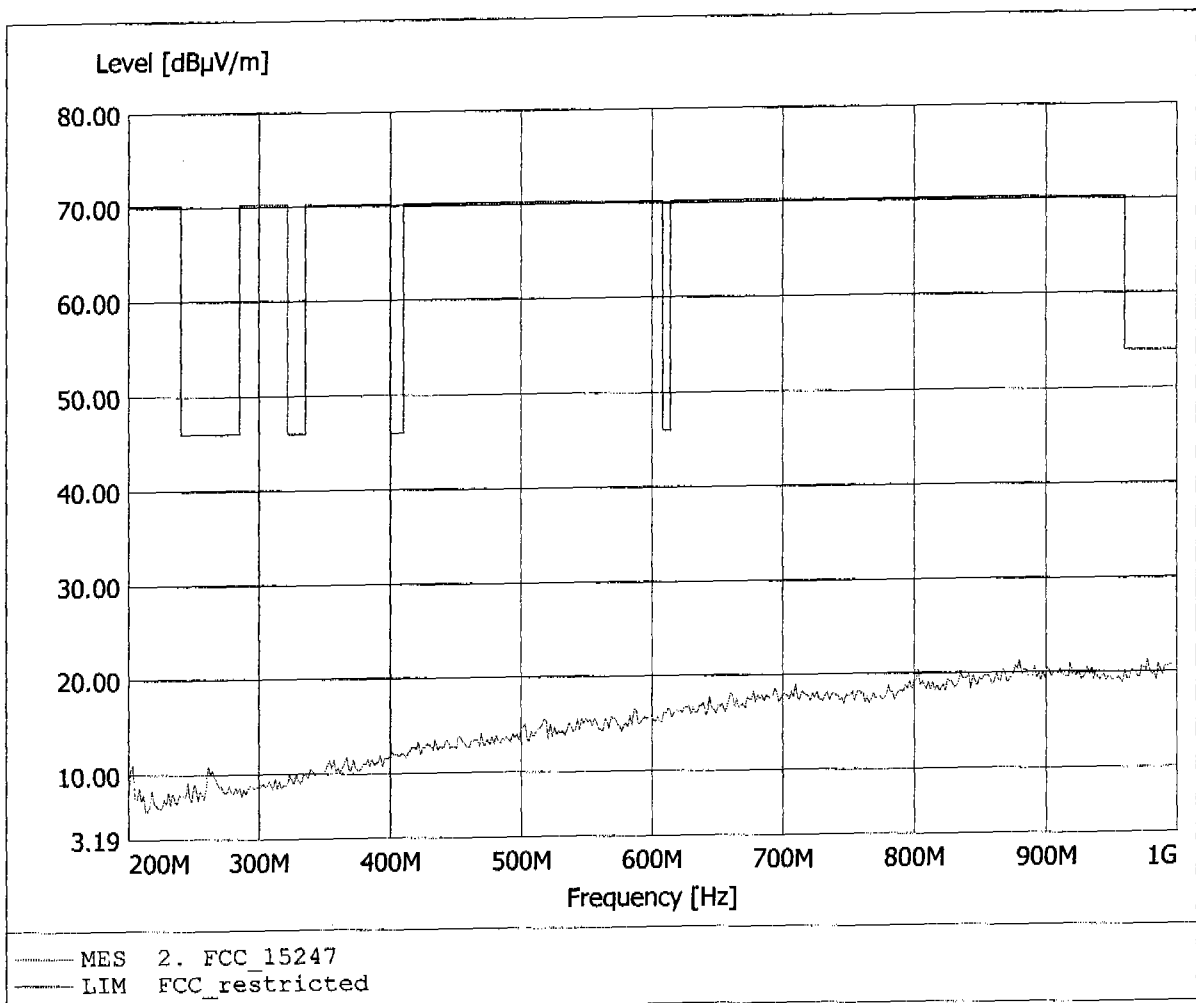


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 21.02dBμV/m, RBW: 100kHz

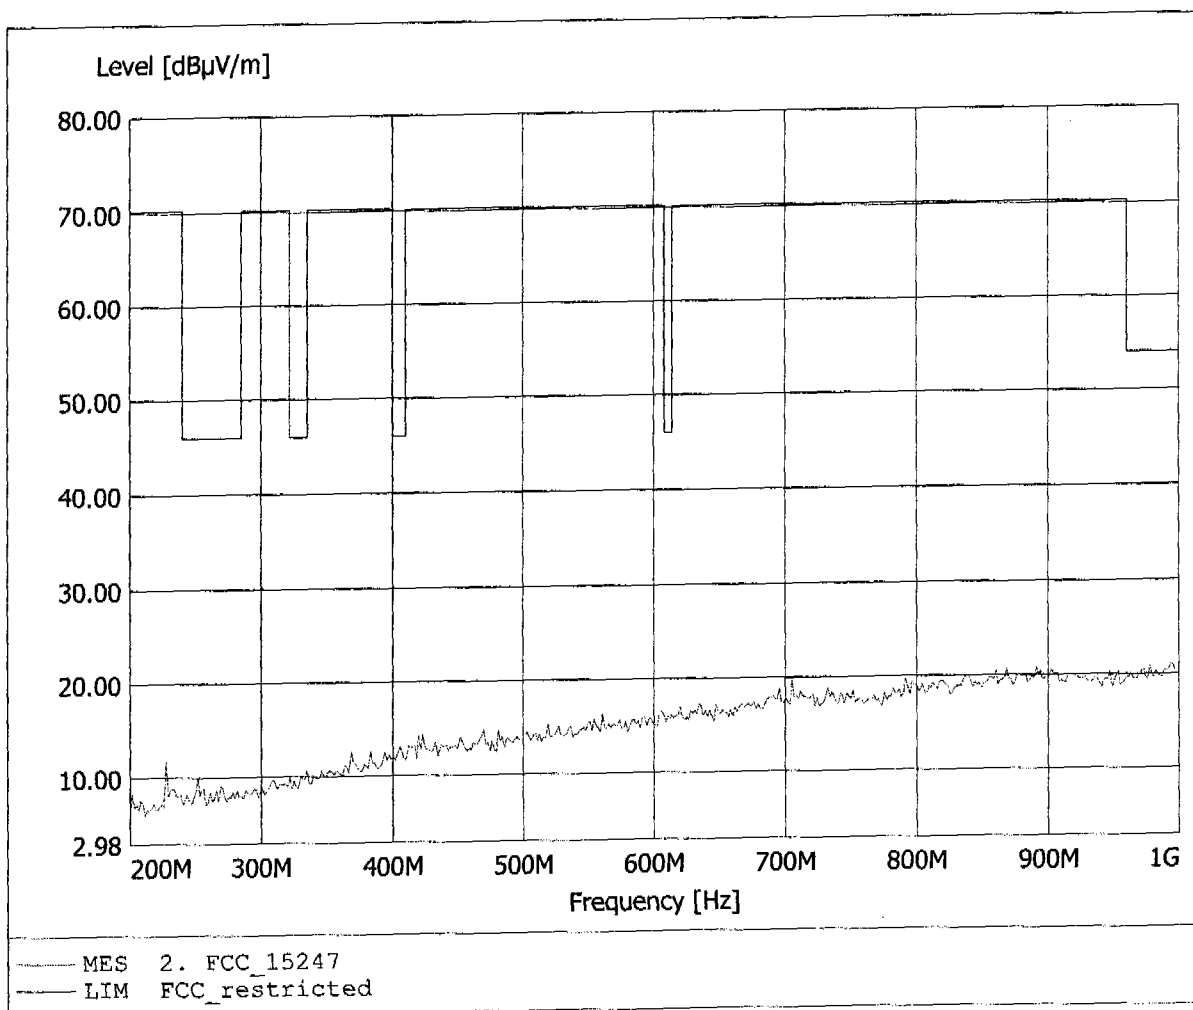


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 55.69dBuV/m, RBW: 1MHz

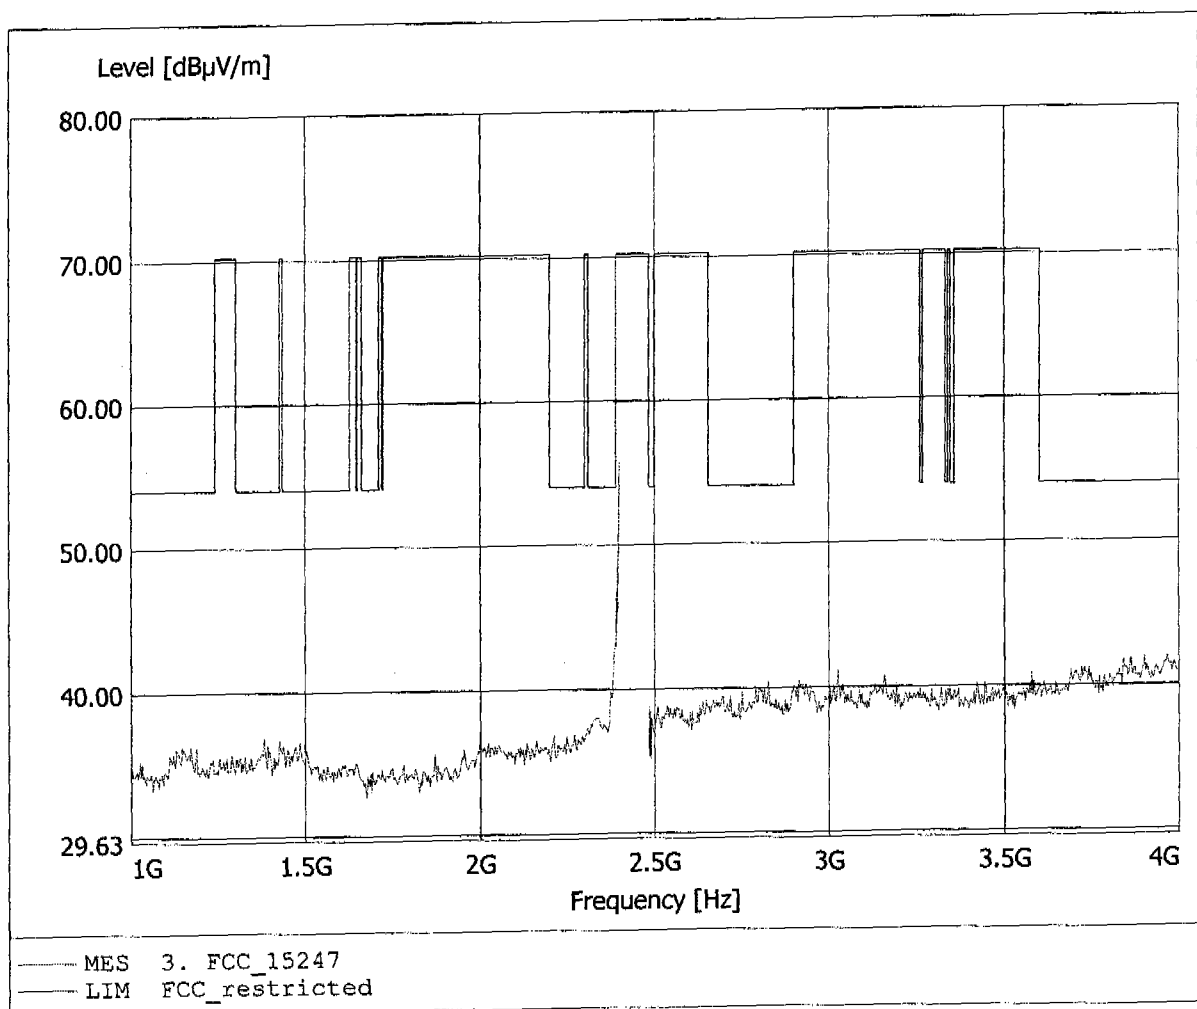


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 55.69dBµV/m, RBW: 1MHz

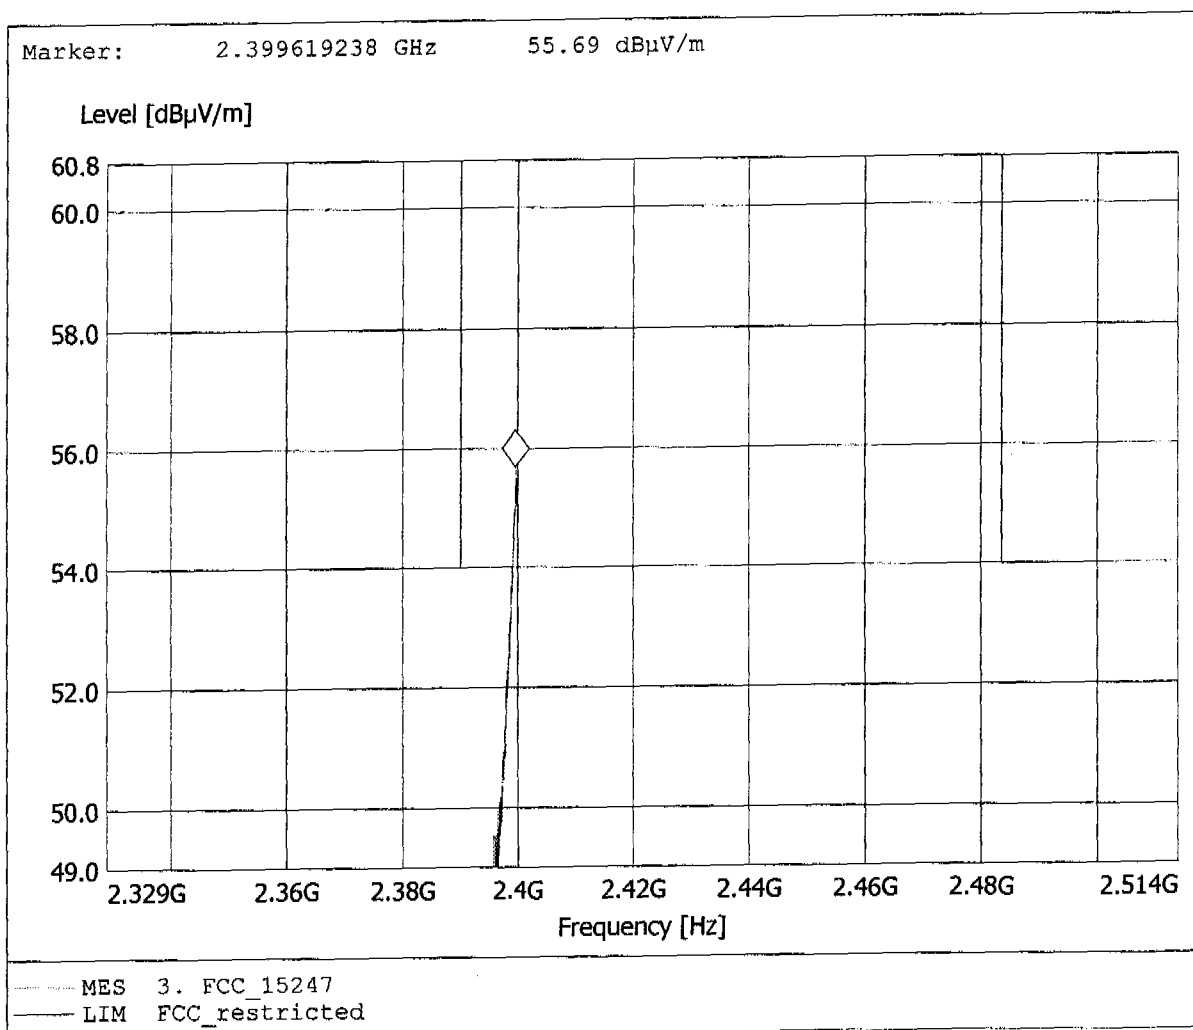


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
 Model: HSTNH-C01C / Pmax / 2402 MHz
 Manufacturer: COMPAL ELECTRONICS, INC.
 Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
 Comment 2: Freq: 2.400GHz, Emax: 49.72dBµV/m, RBW: 1MHz

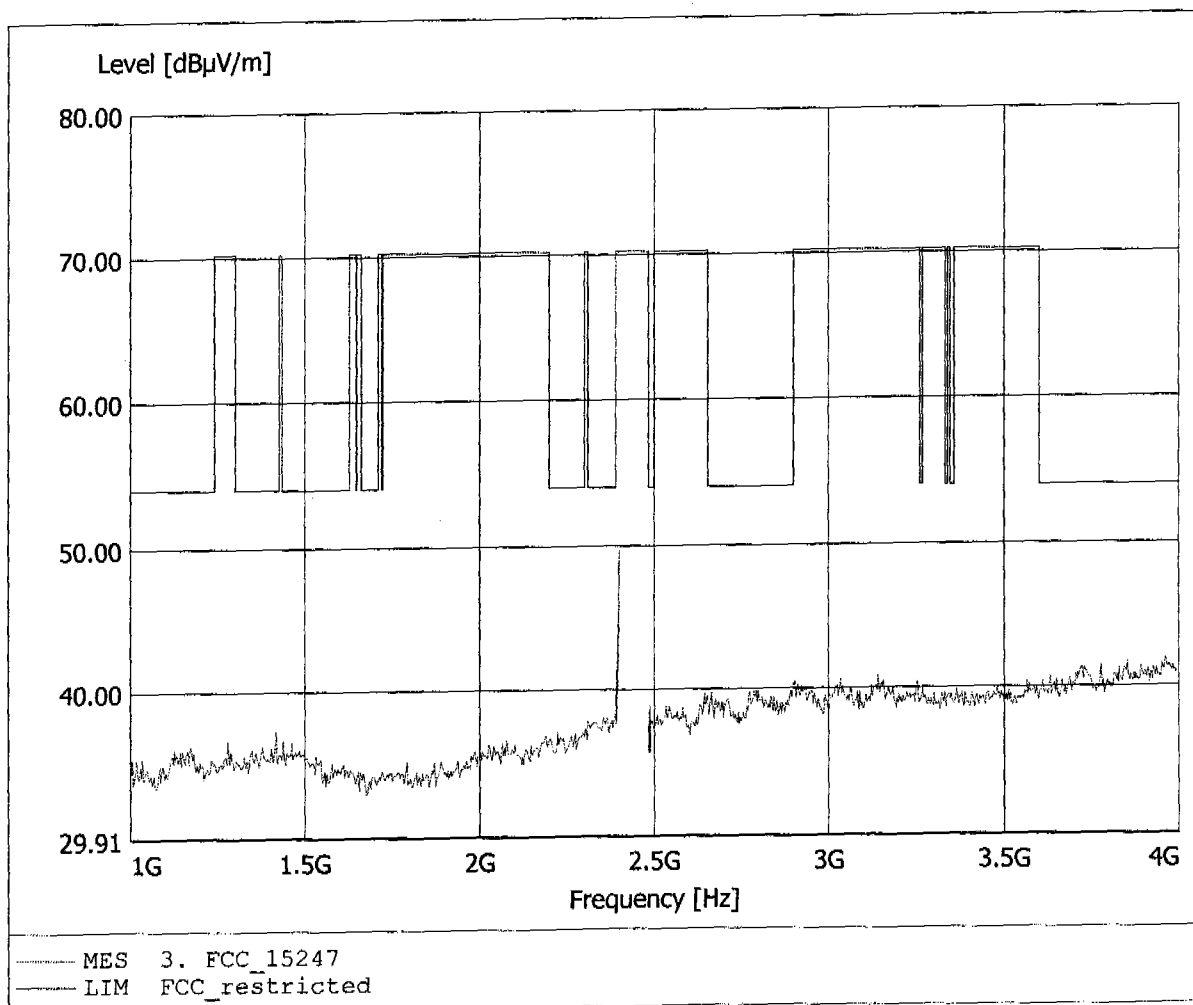


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 44.91dBµV/m, RBW: 1MHz

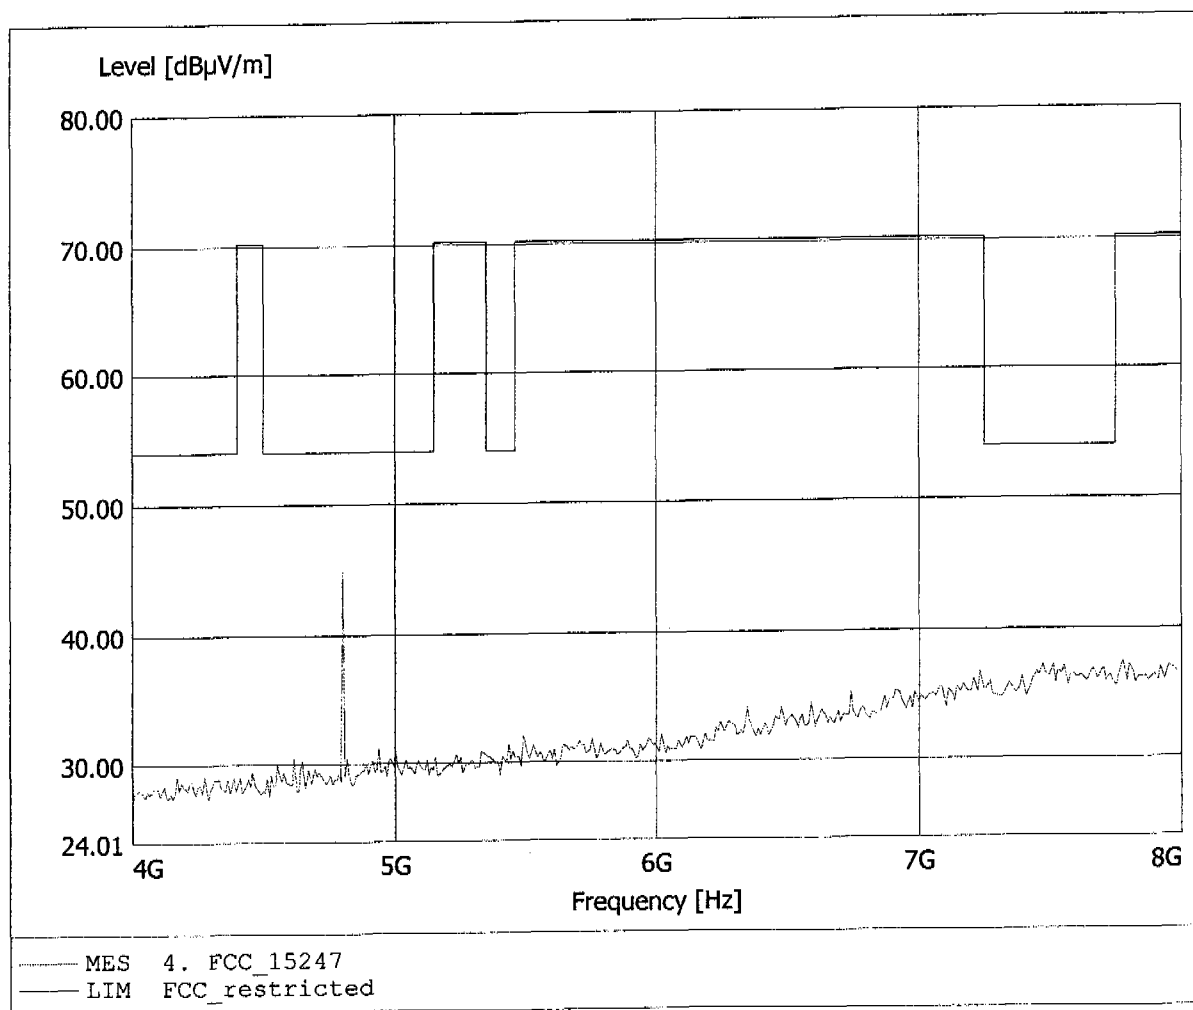


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 39.98dBμV/m, RBW: 1MHz

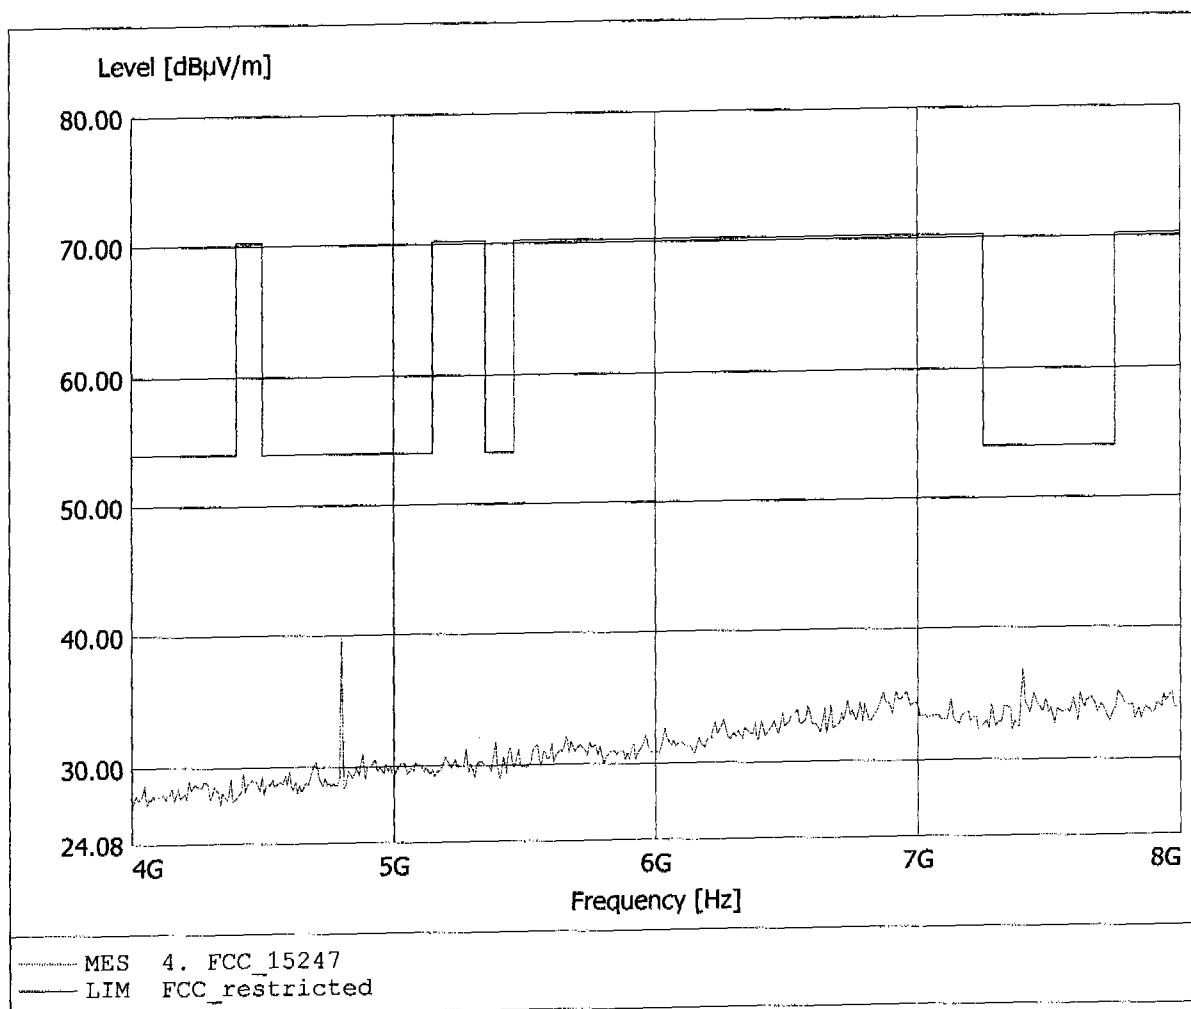


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.611GHz, Emax: 43.47dBuV/m, RBW: 1MHz

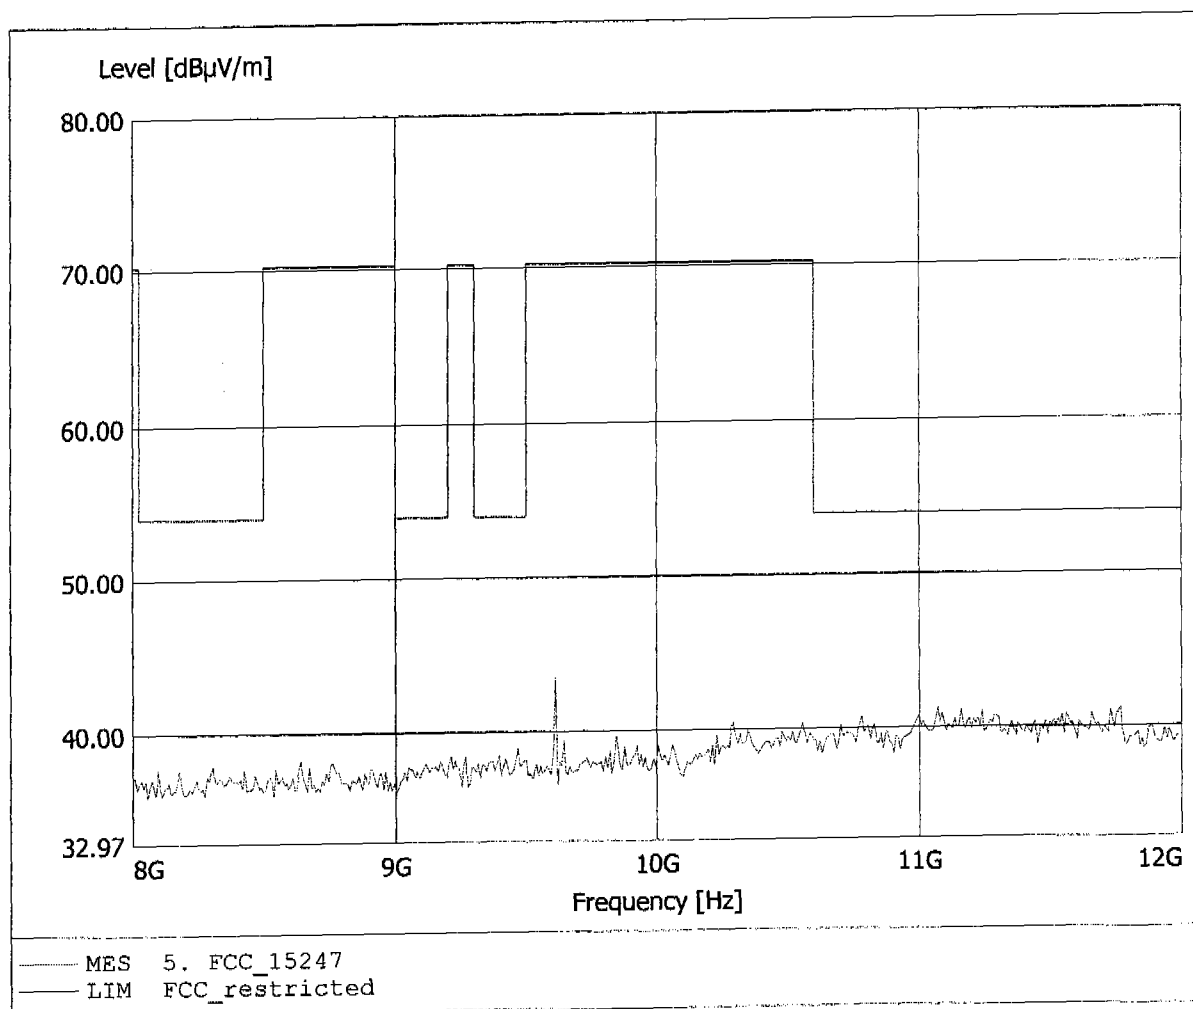


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.230GHz, Emax: 42.07dBµV/m, RBW: 1MHz

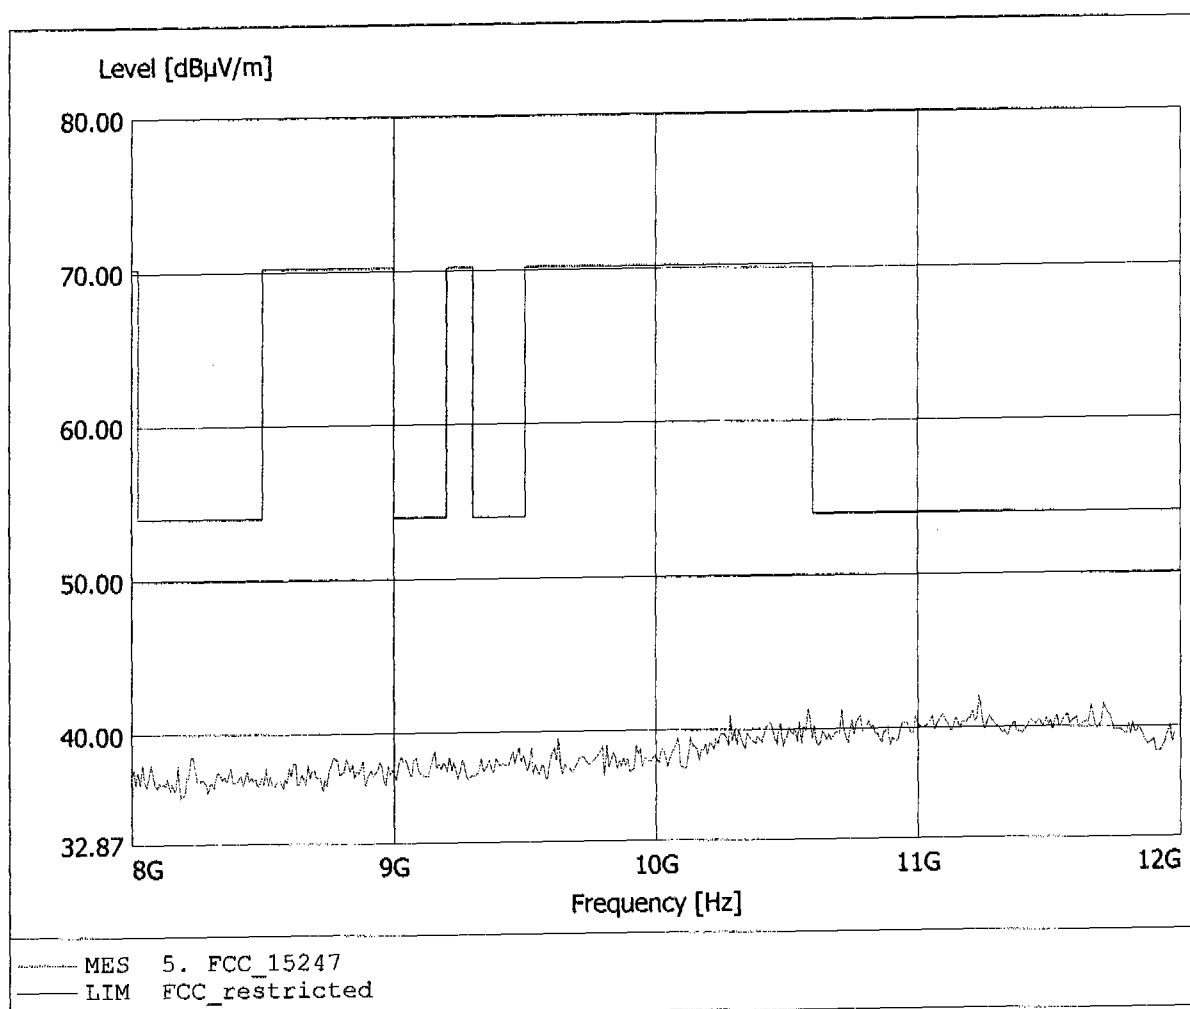


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.144GHz, Emax: 43.64dBuV/m, RBW: 1MHz

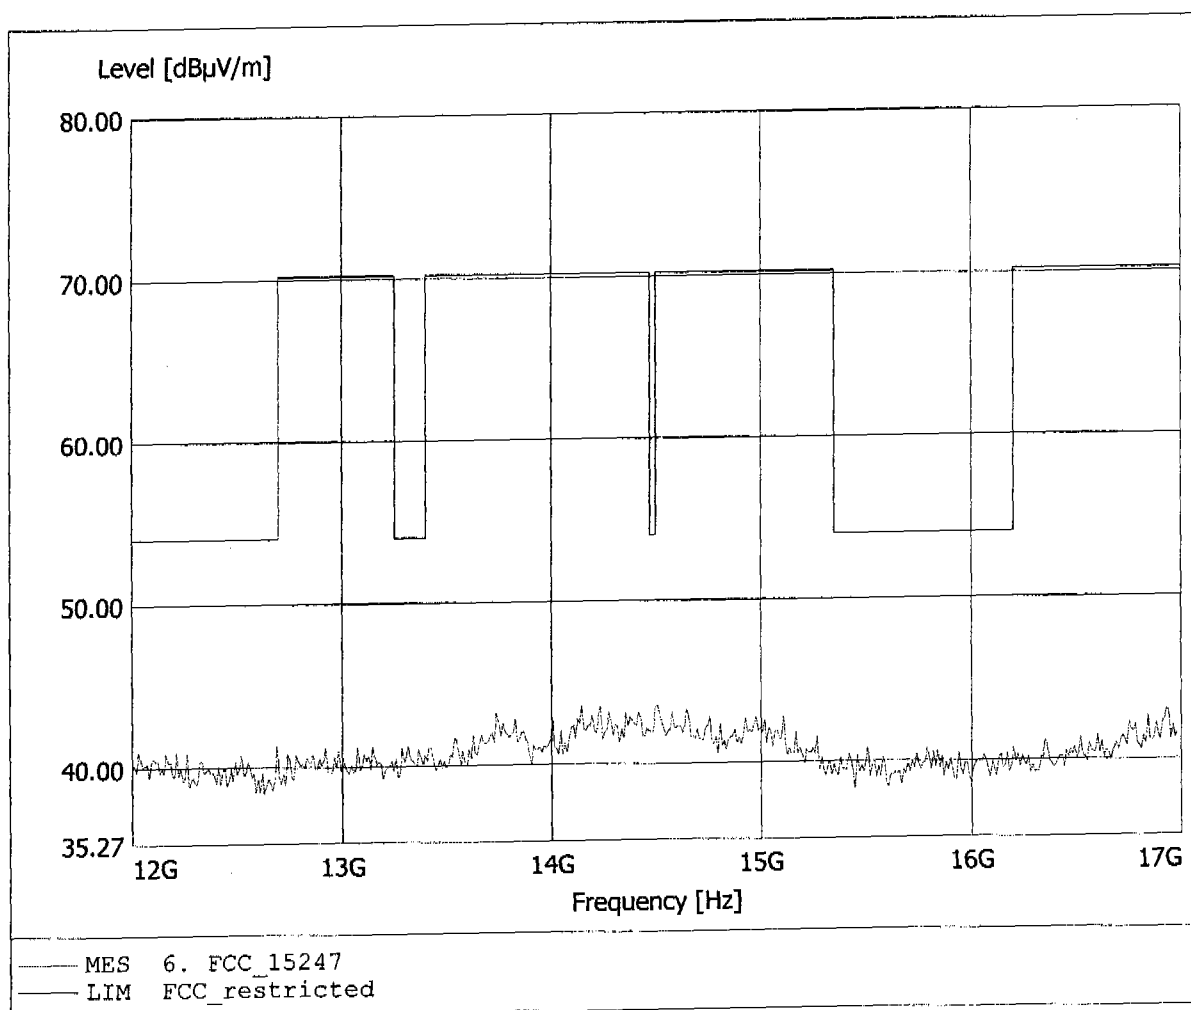


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.764GHz, Emax: 43.54dBμV/m, RBW: 1MHz

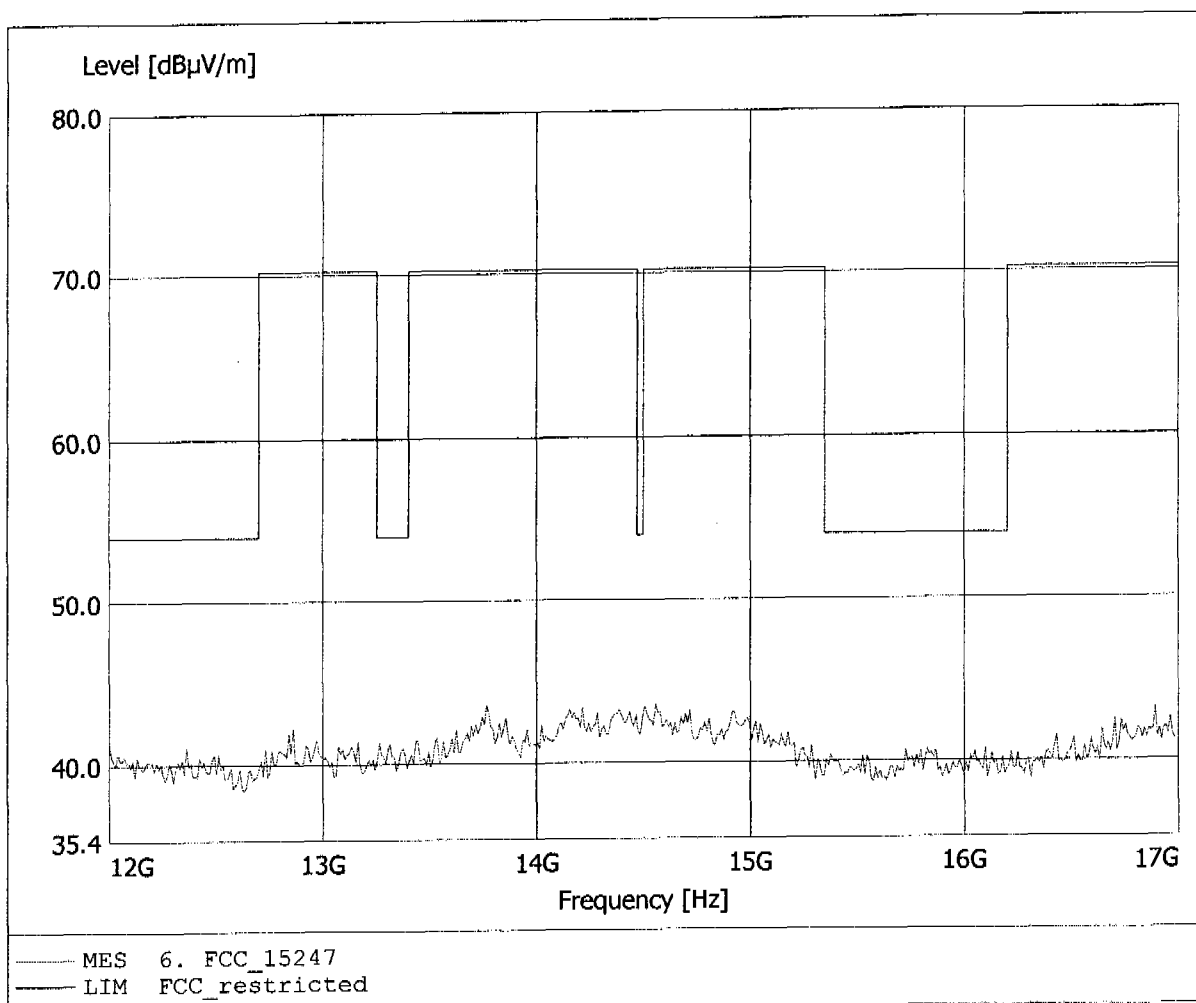


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 44.75dBuV/m, RBW: 1MHz

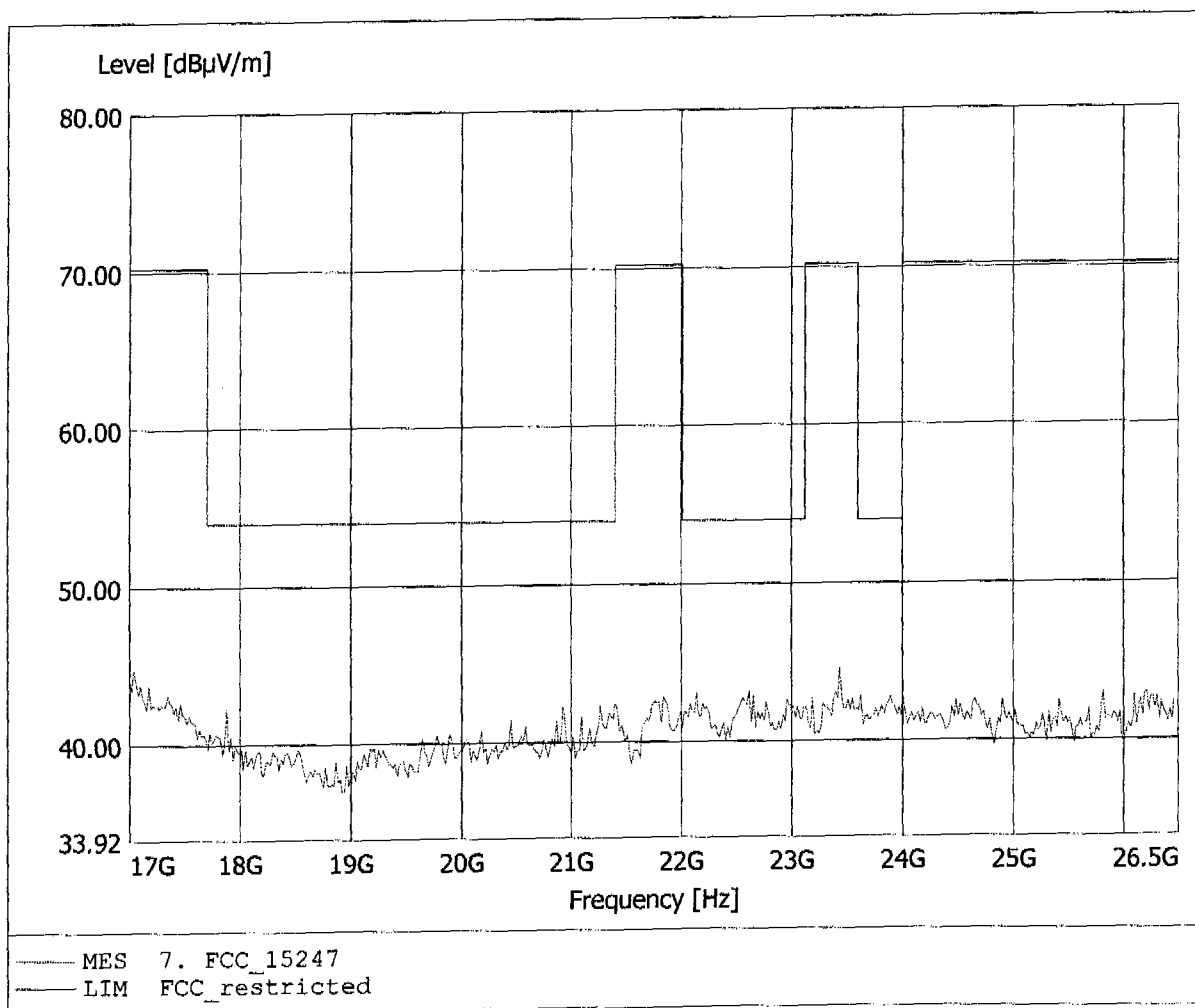


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Emax / 2402 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 44.72dBV/m, RBW: 1MHz

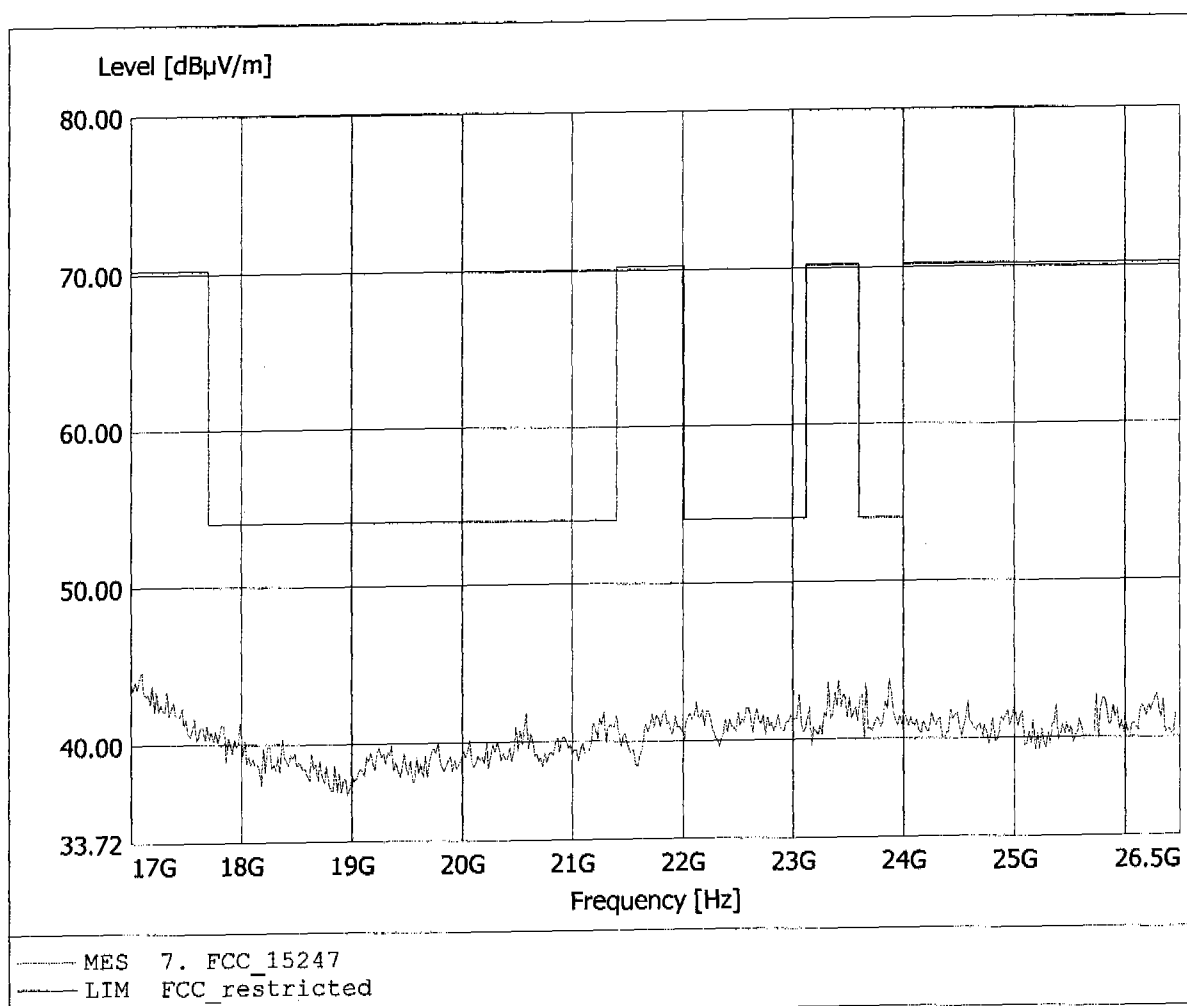


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 30.29dBµV/m, RBW: 100kHz

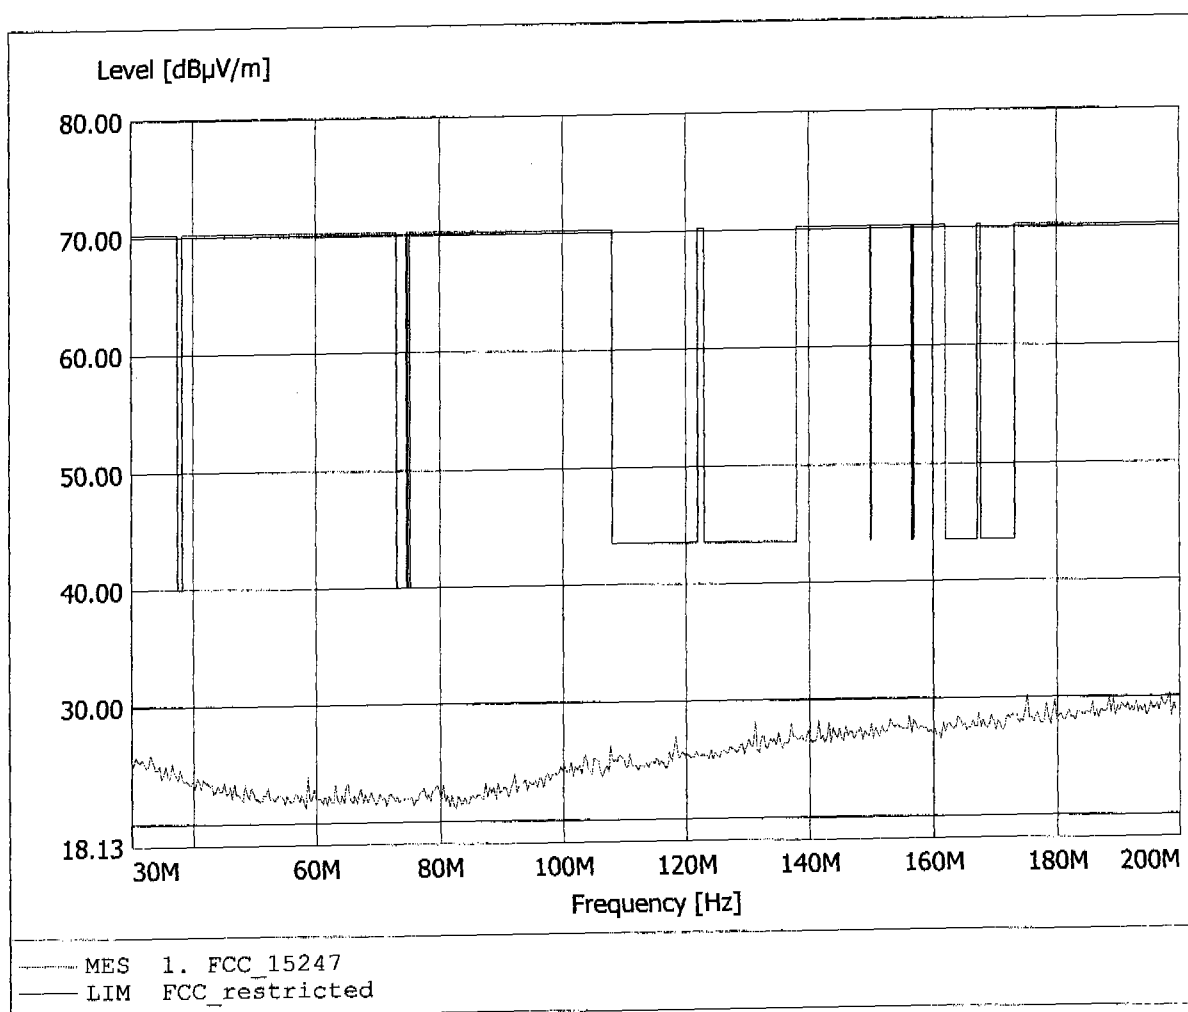


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.890MHz, Emax: 30.74dBµV/m, RBW: 100kHz

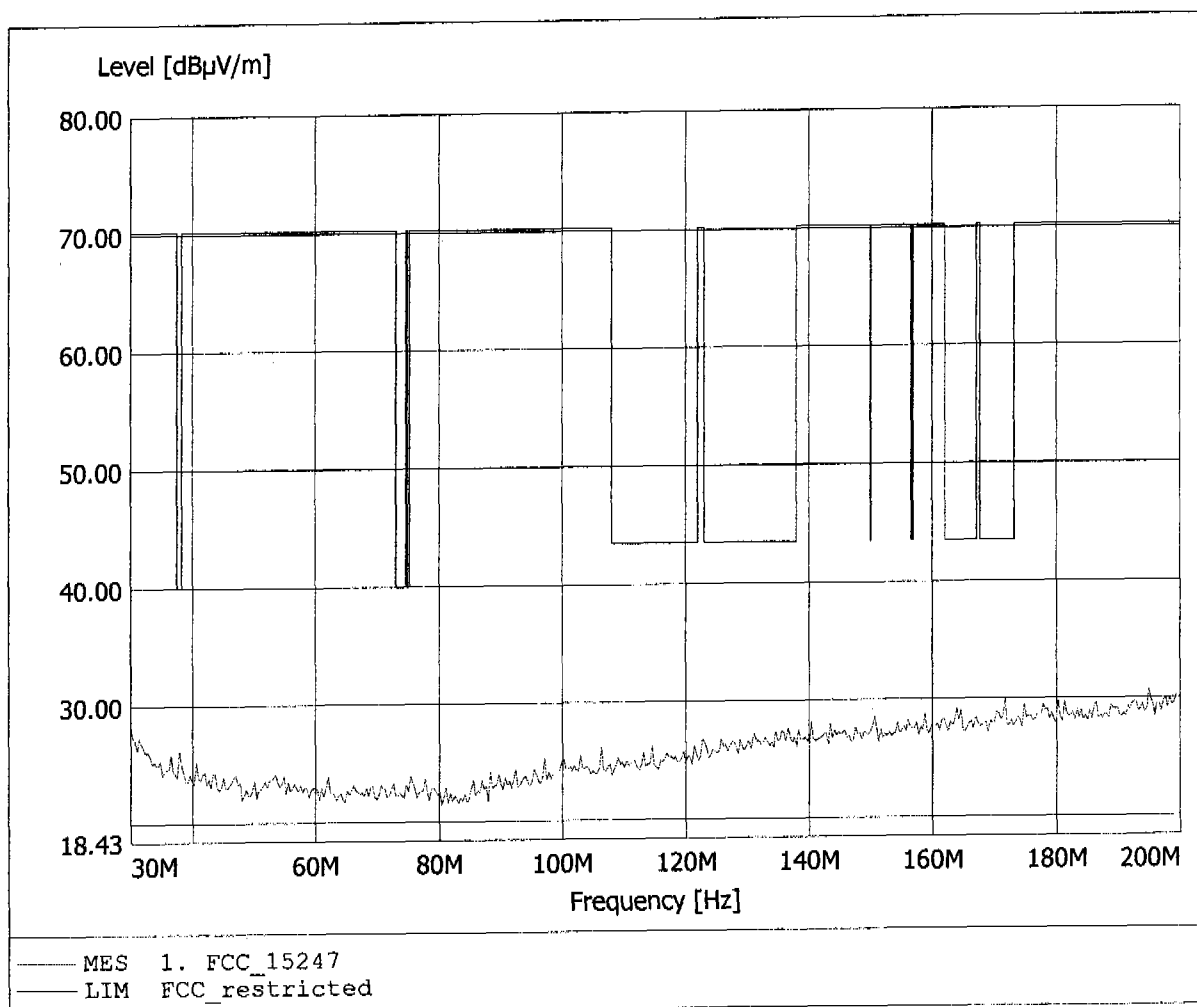


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 20.86dBµV/m, RBW: 100kHz

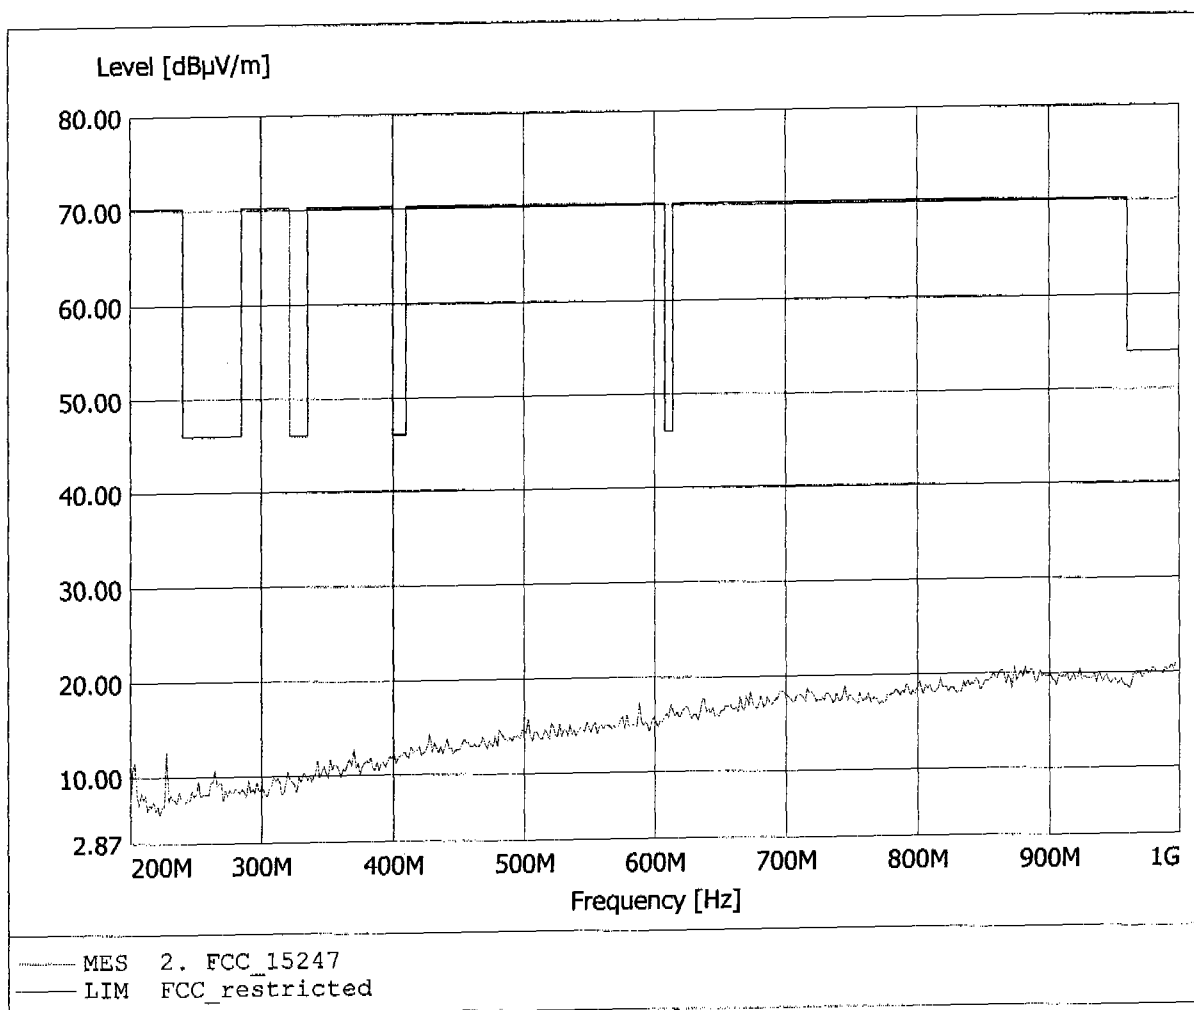


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif. -
Comment 2: Freq: 924.649MHz, Emax: 21.19dBµV/m, RBW: 100kHz

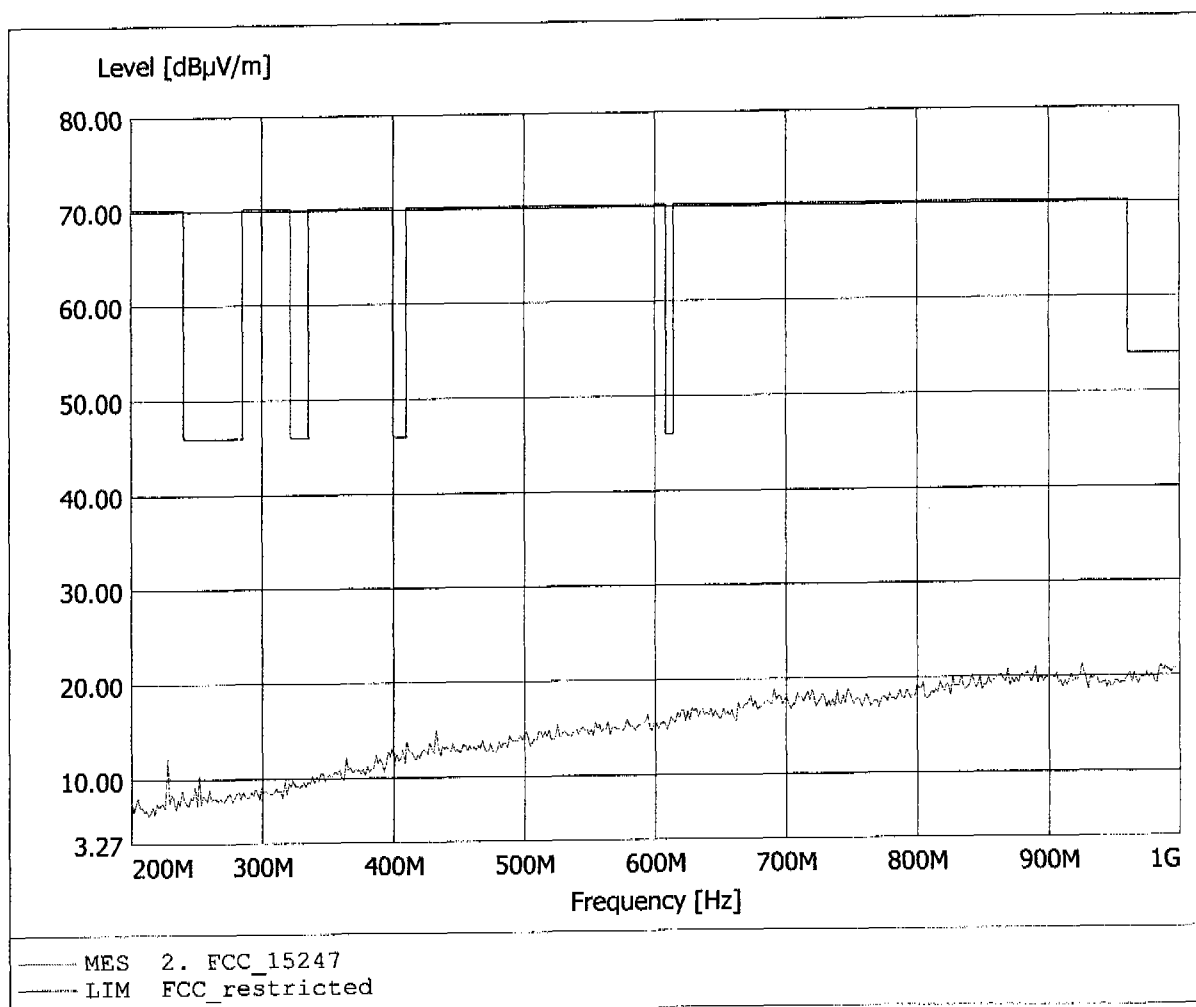


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.939GHz, Emax: 42.38dBuV/m, RBW: 1MHz

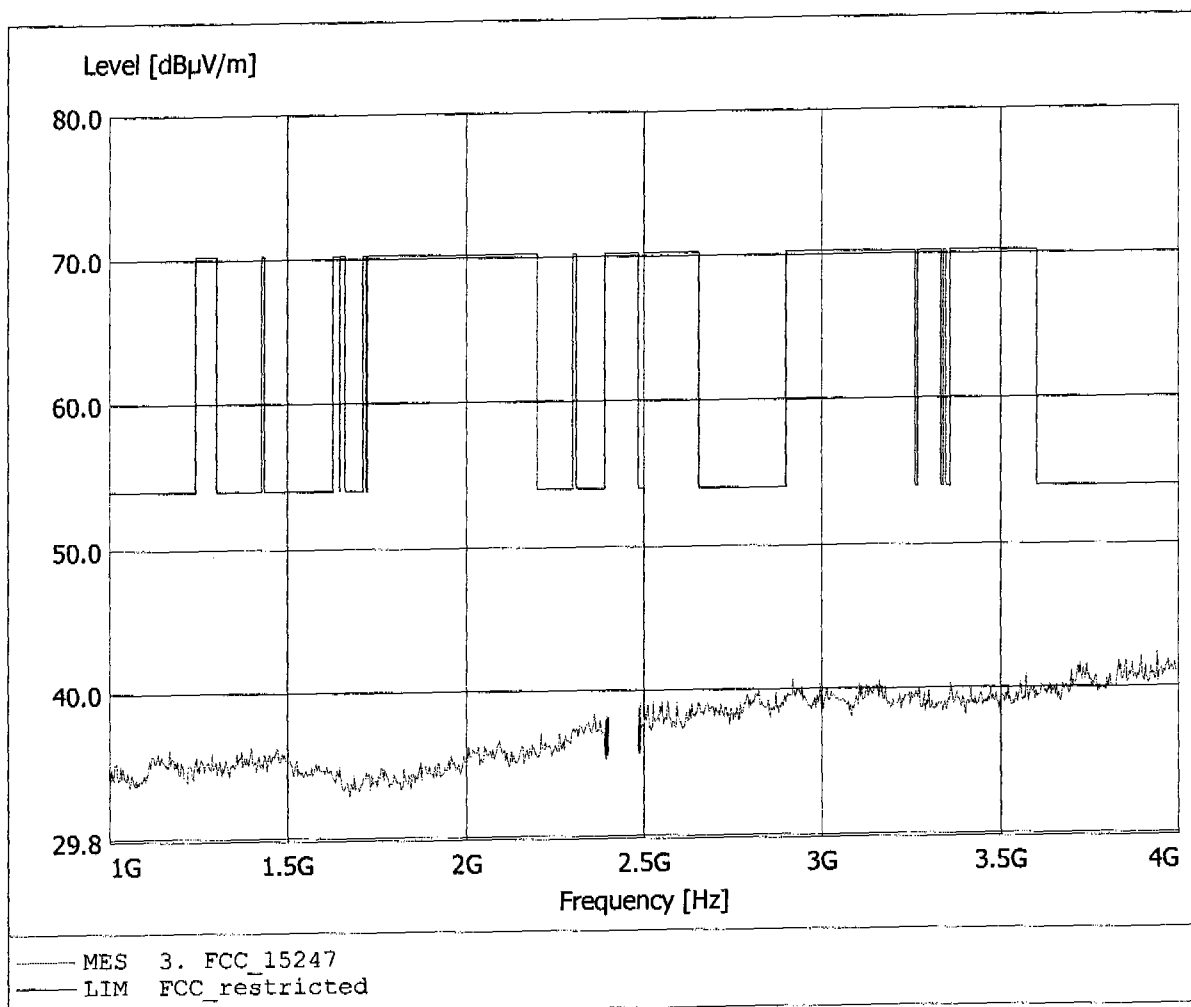


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.933GHz, Emax: 41.81dBµV/m, RBW: 1MHz

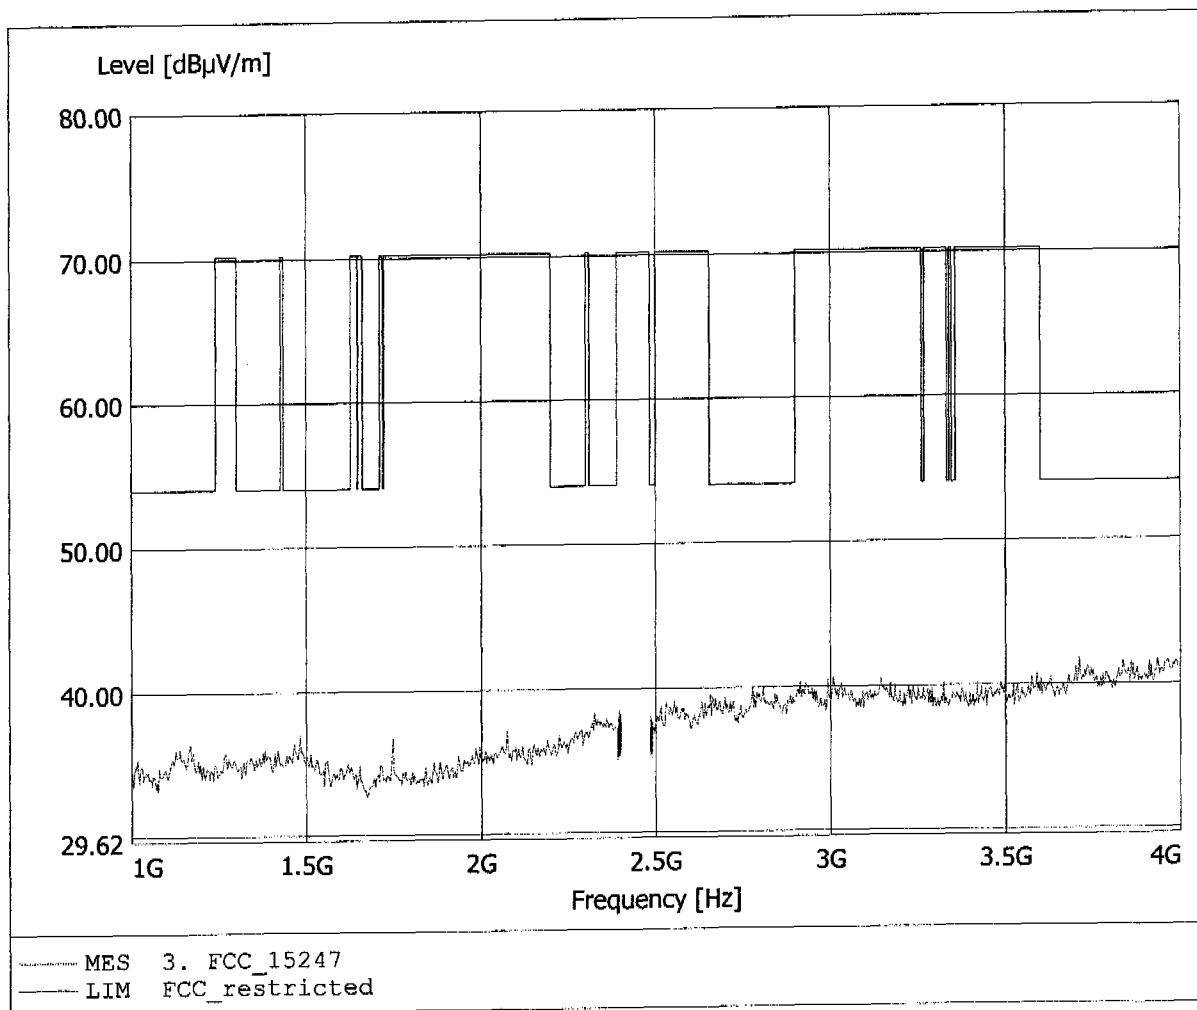


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 44.62dBµV/m, RBW: 1MHz

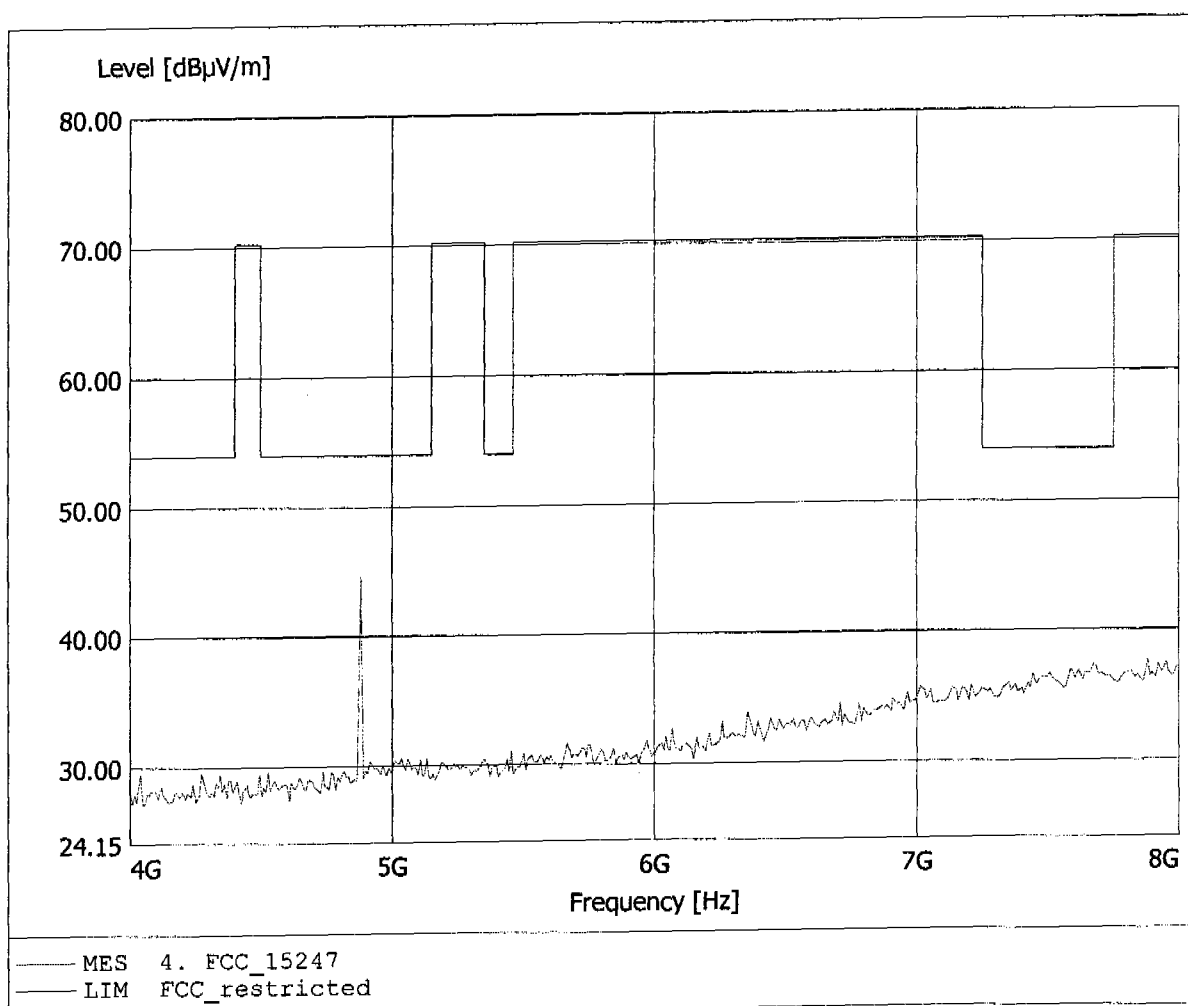


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.00dBuV/m, RBW: 1MHz

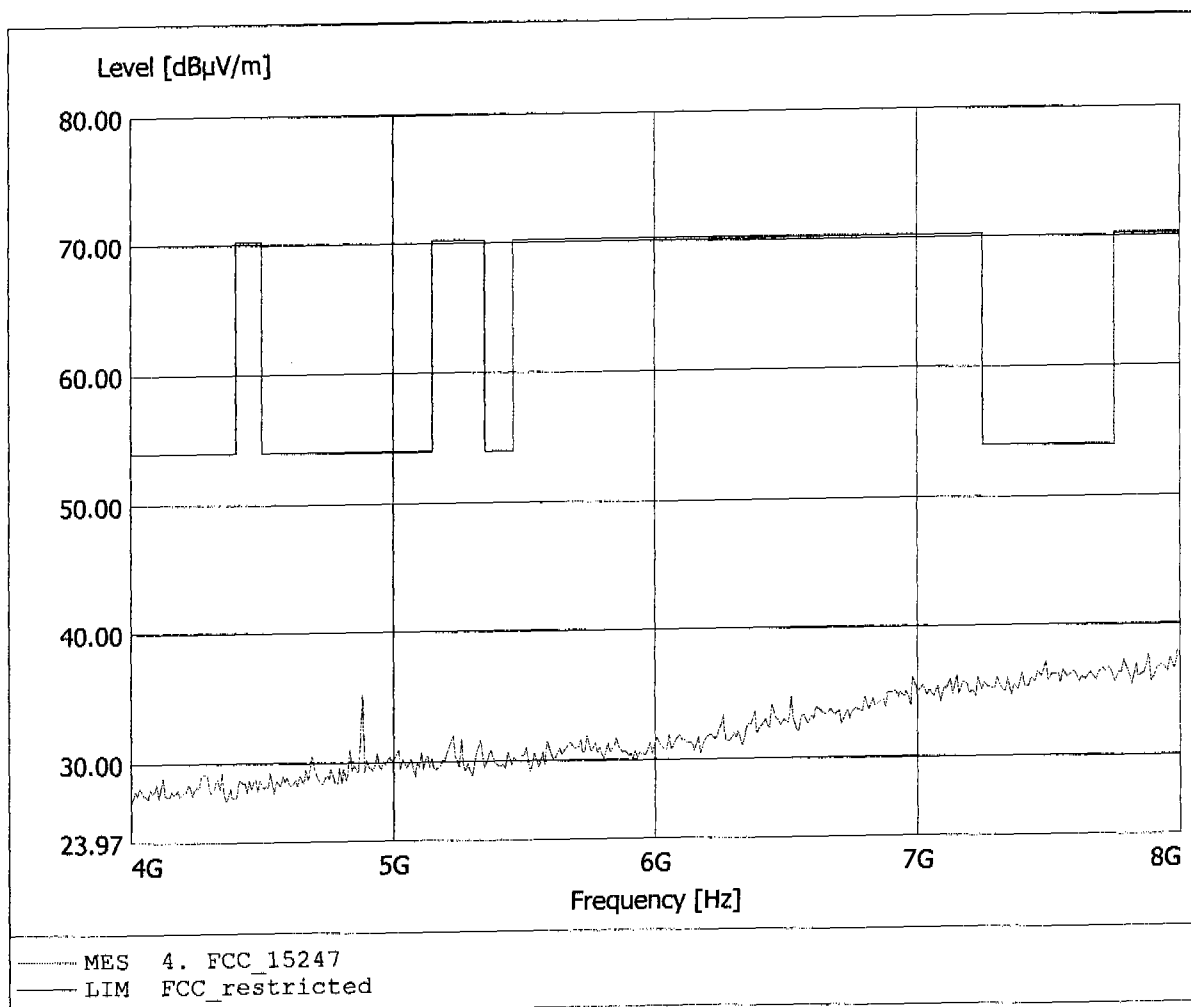


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 43.29dBµV/m, RBW: 1MHz

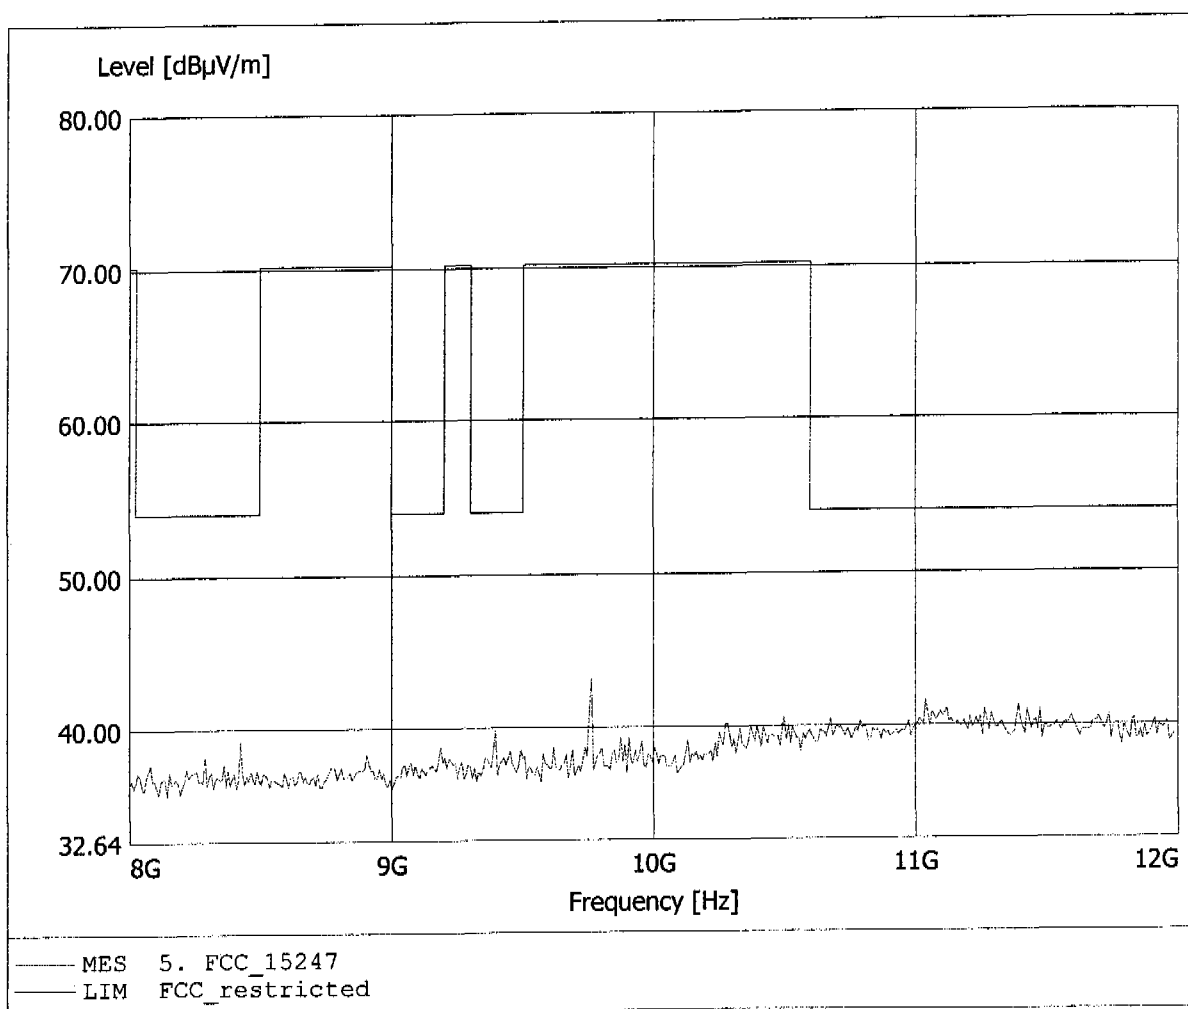


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.142GHz, Emax: 41.34dBuV/m, RBW: 1MHz

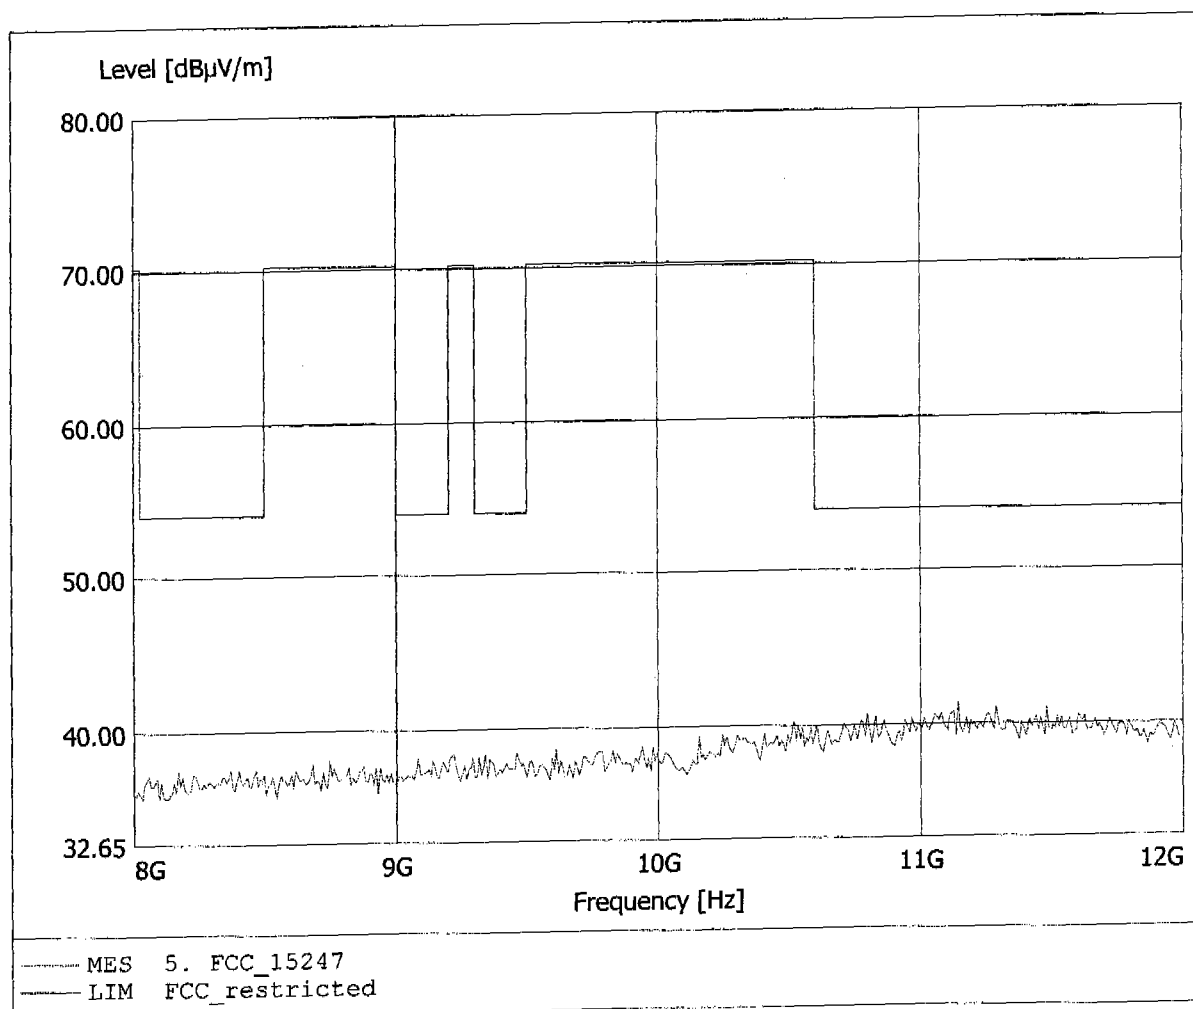


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Emax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.725GHz, Emax: 44.31dBuV/m, RBW: 1MHz

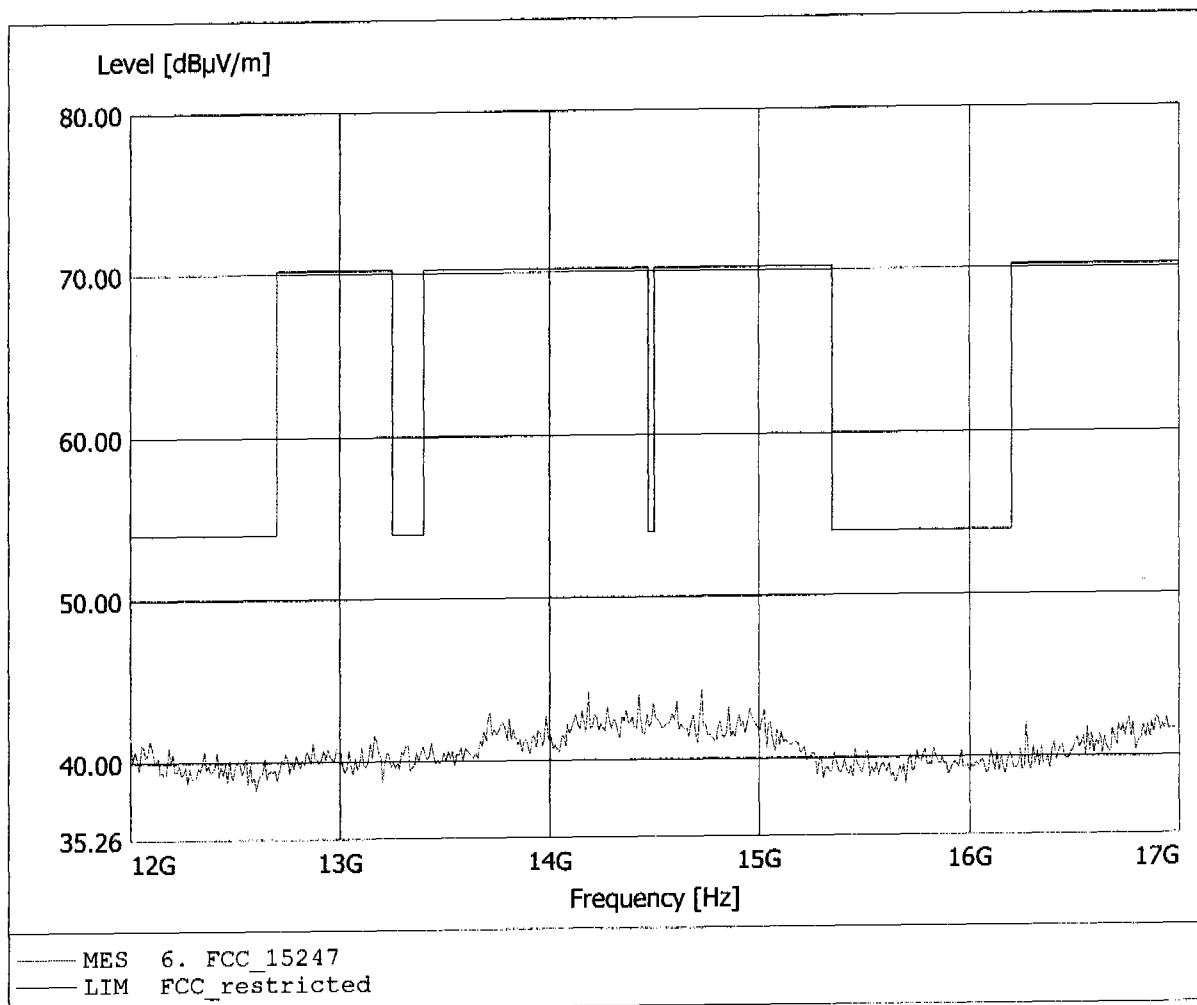


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.575GHz, Emax: 43.49dBμV/m, RBW: 1MHz

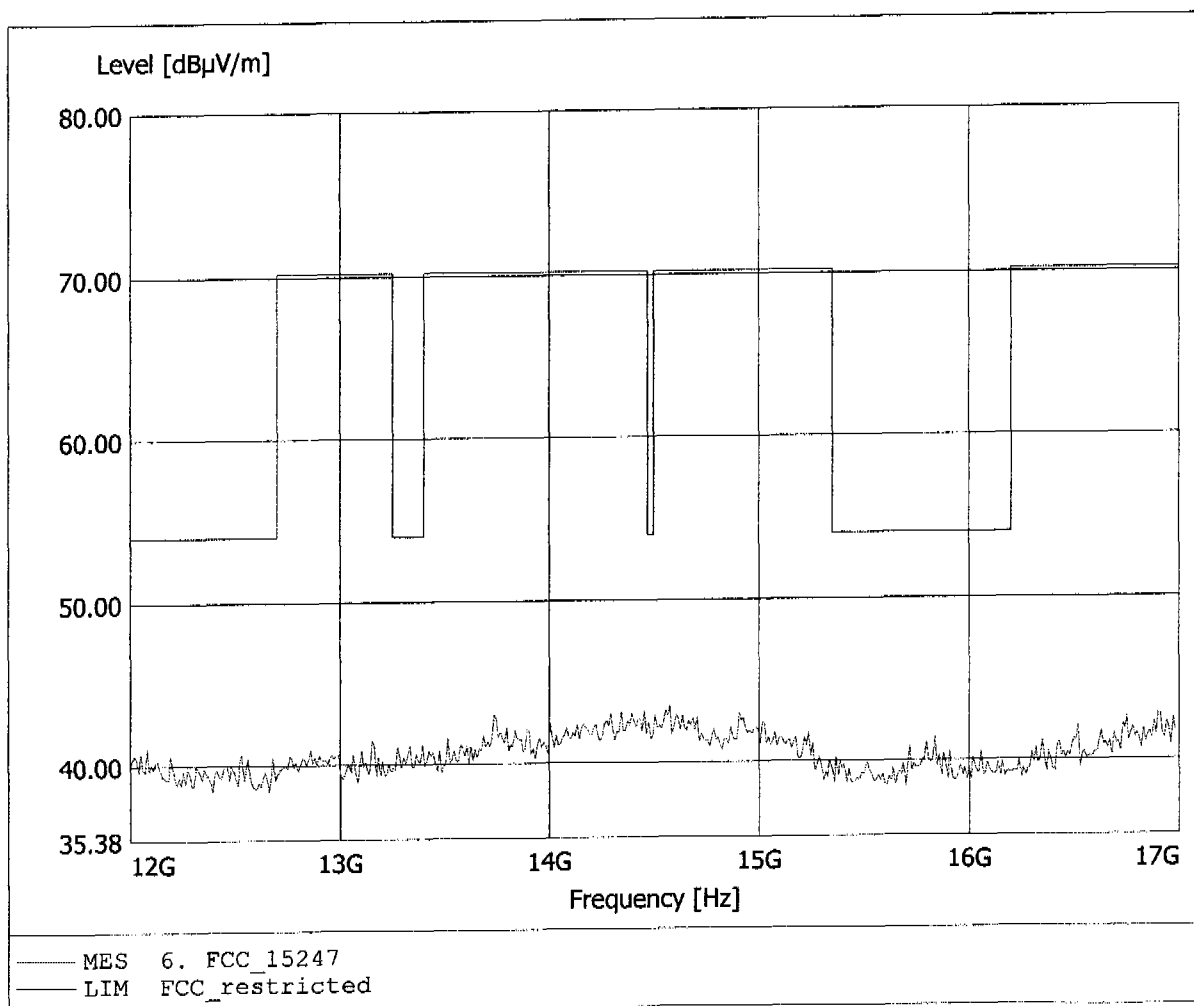


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.65dBμV/m, RBW: 1MHz

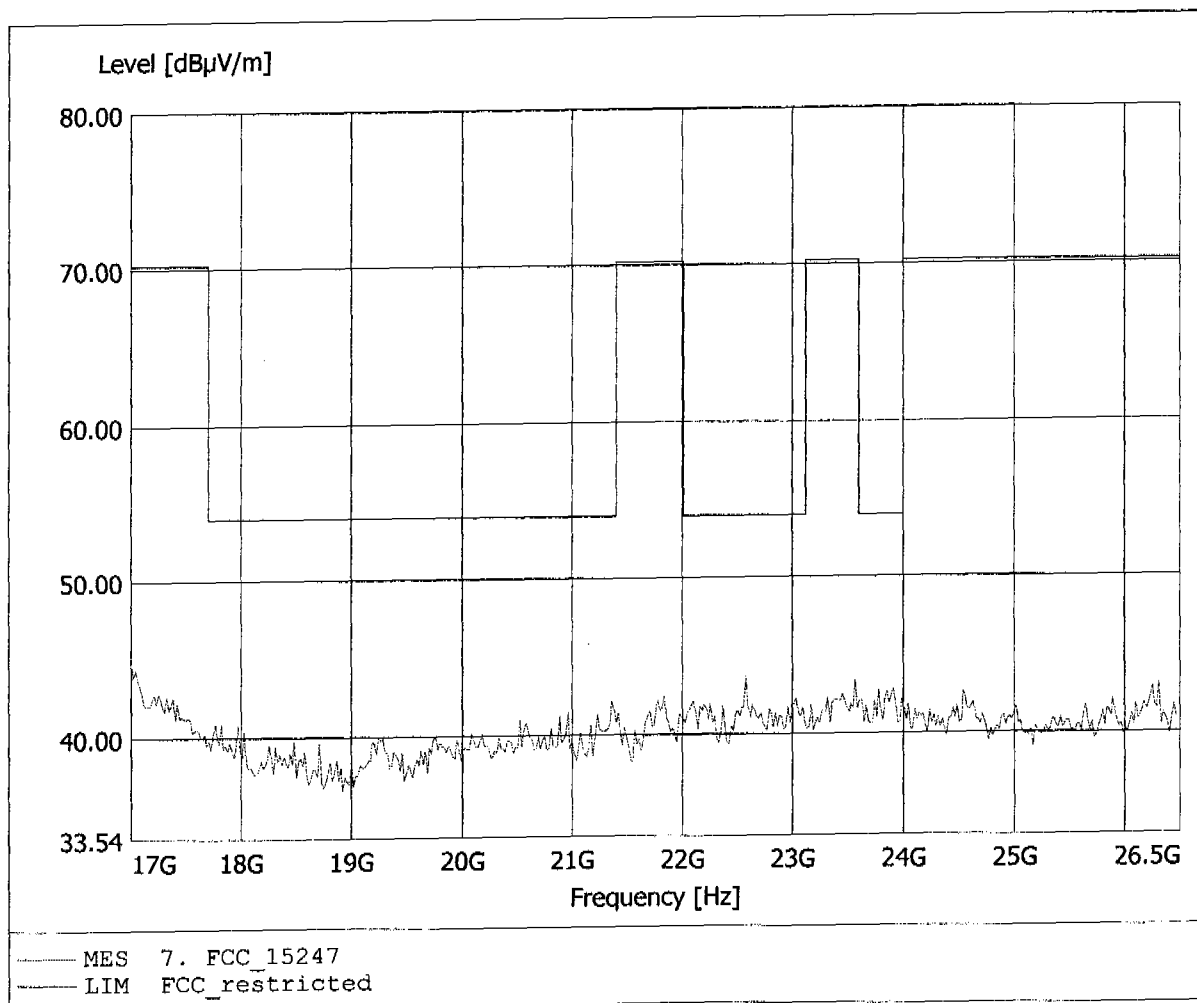


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2441 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.88dBµV/m, RBW: 1MHz

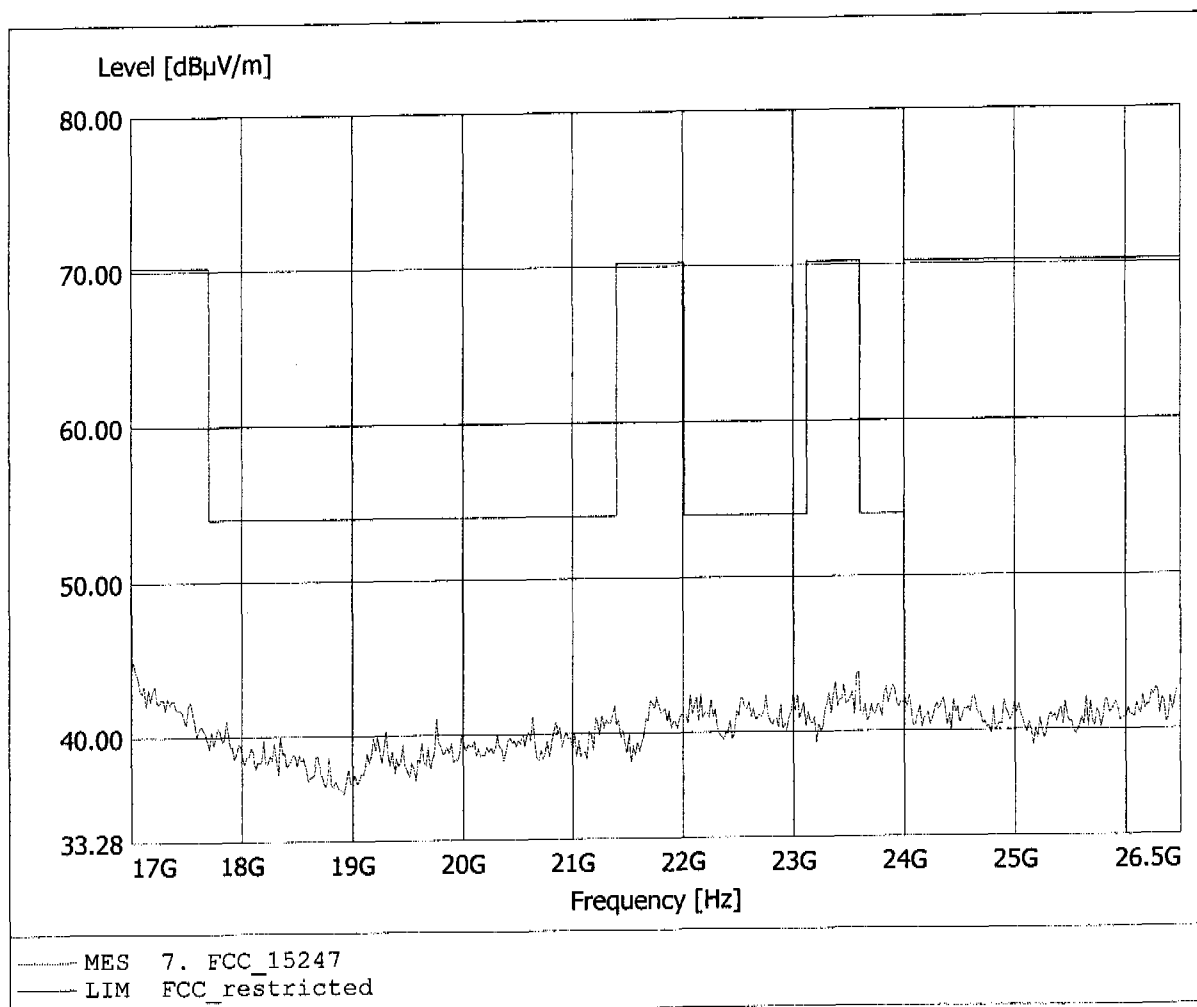


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 30.25dBµV/m, RBW: 100kHz

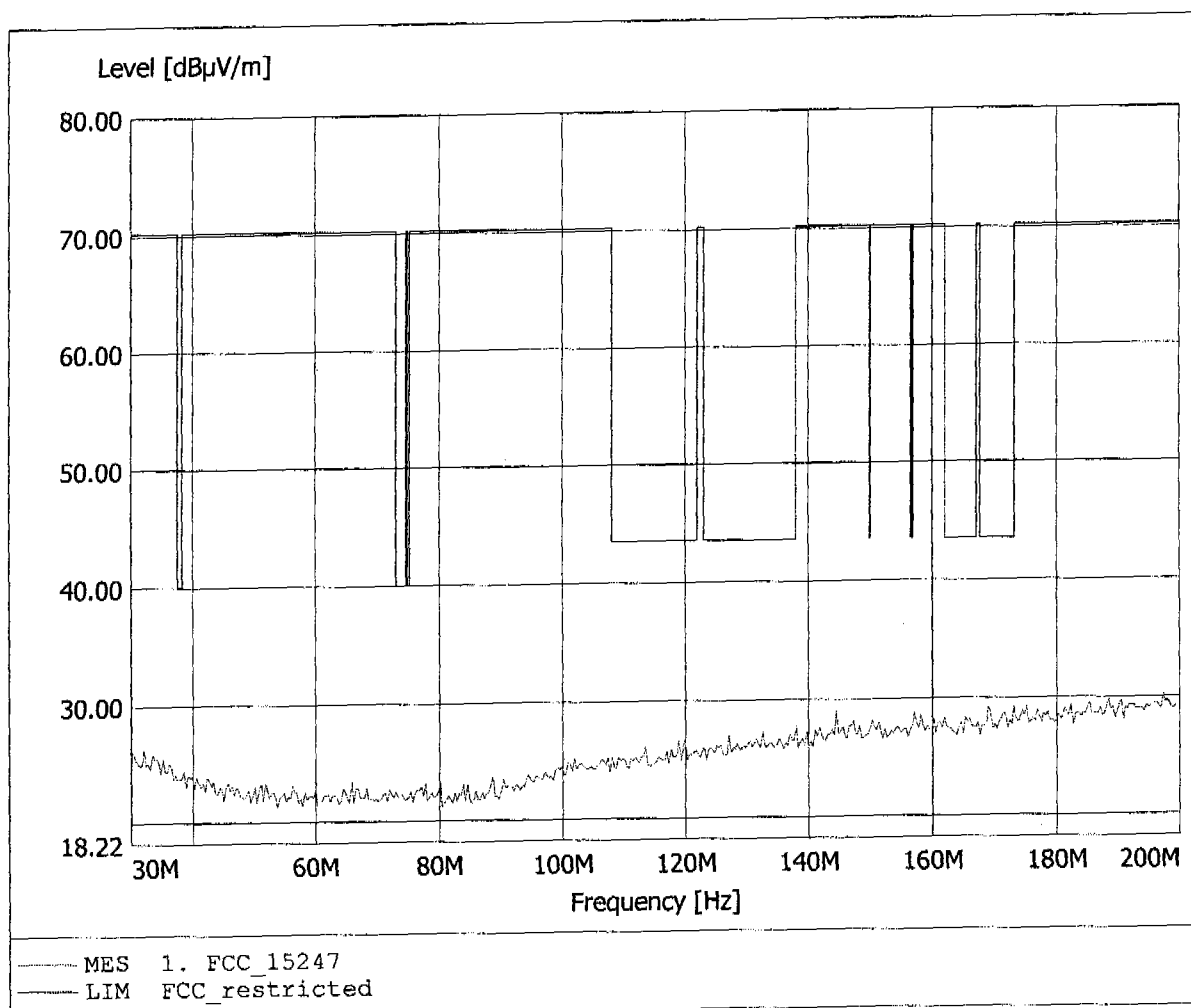


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 31.11dBuV/m, RBW: 100kHz

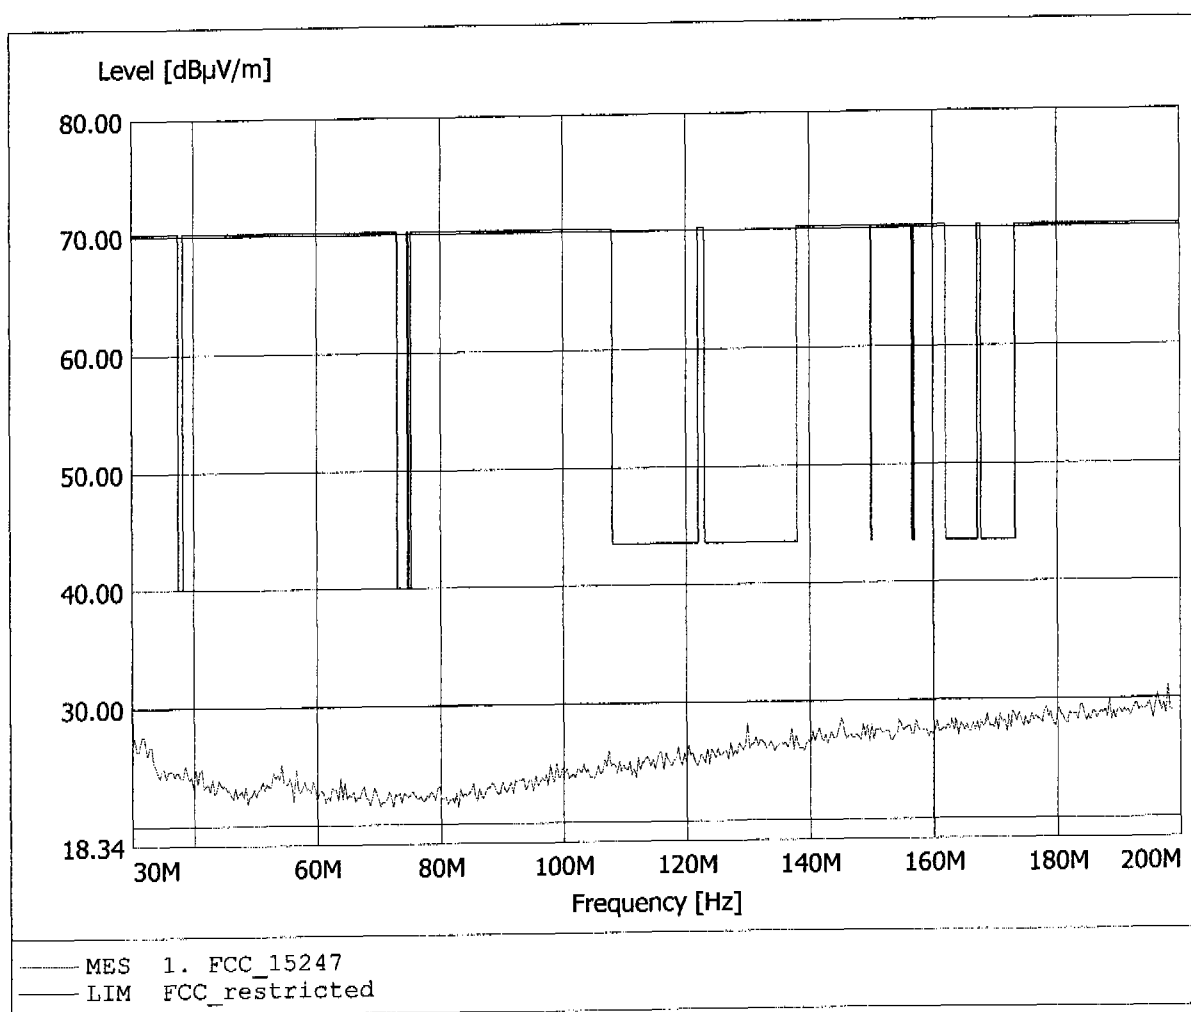


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 802.806MHz, Emax: 21.12dBµV/m, RBW: 100kHz

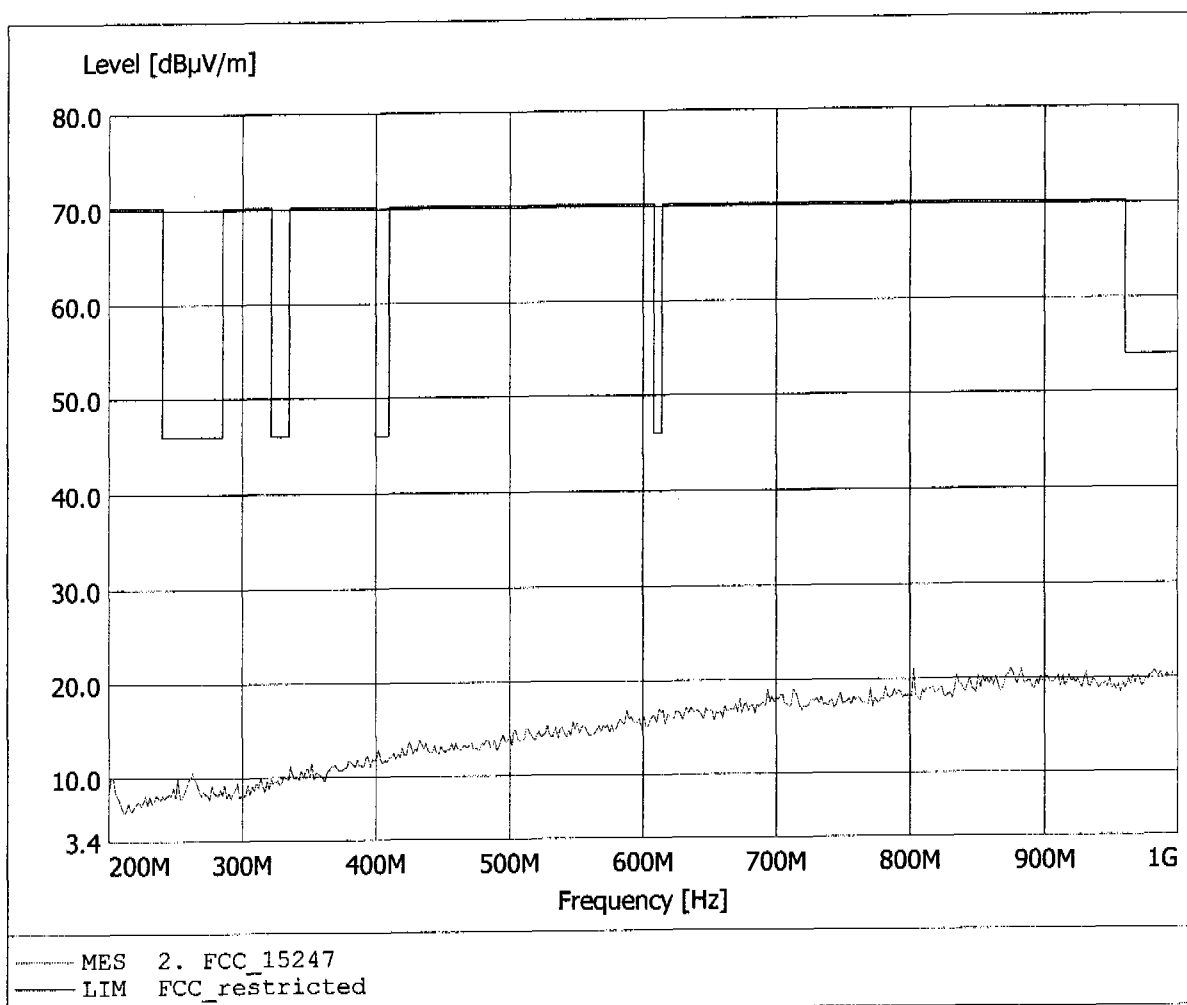


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 21.61dBµV/m, RBW: 100kHz

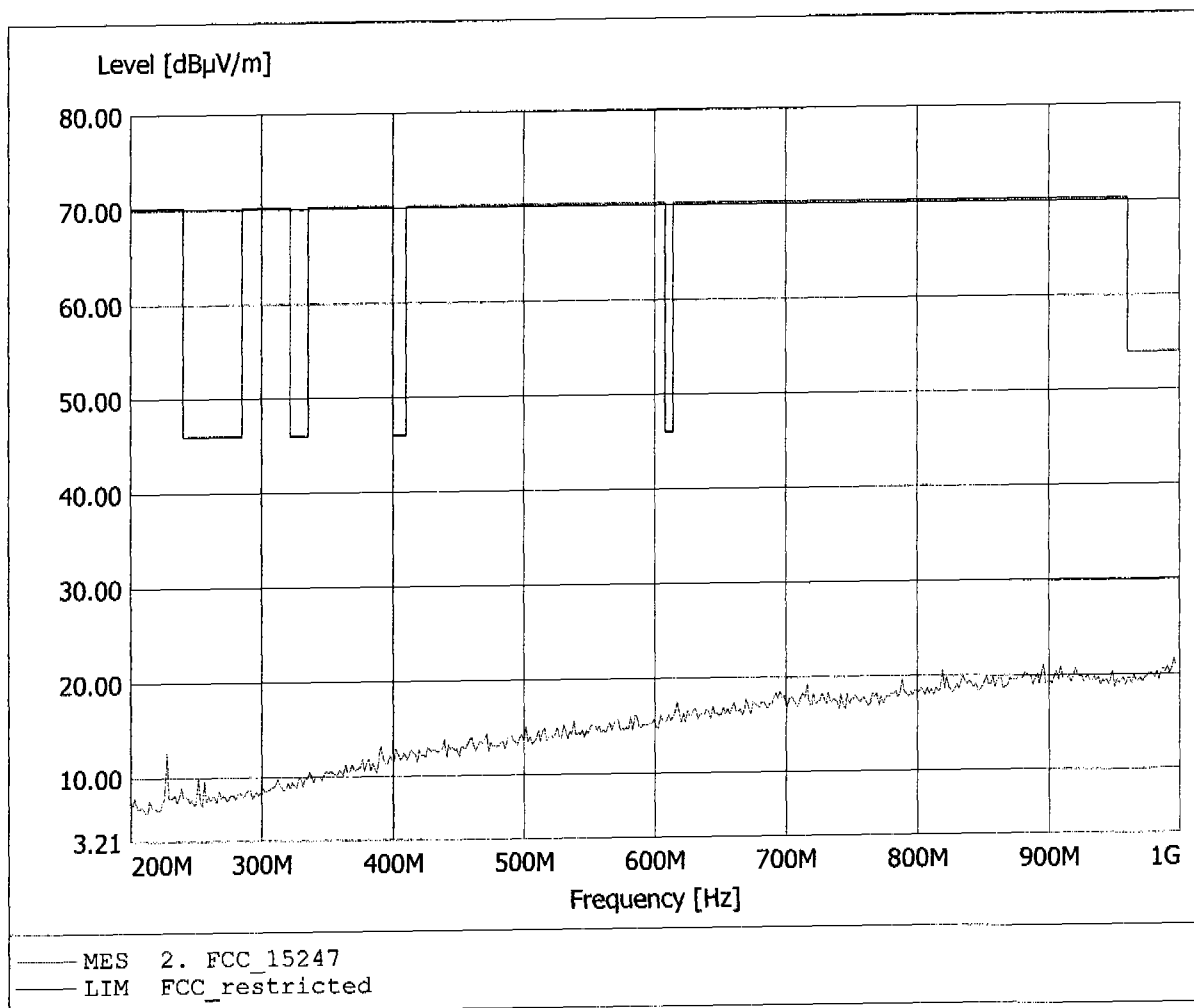


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 55.98dBµV/m, RBW: 1MHz

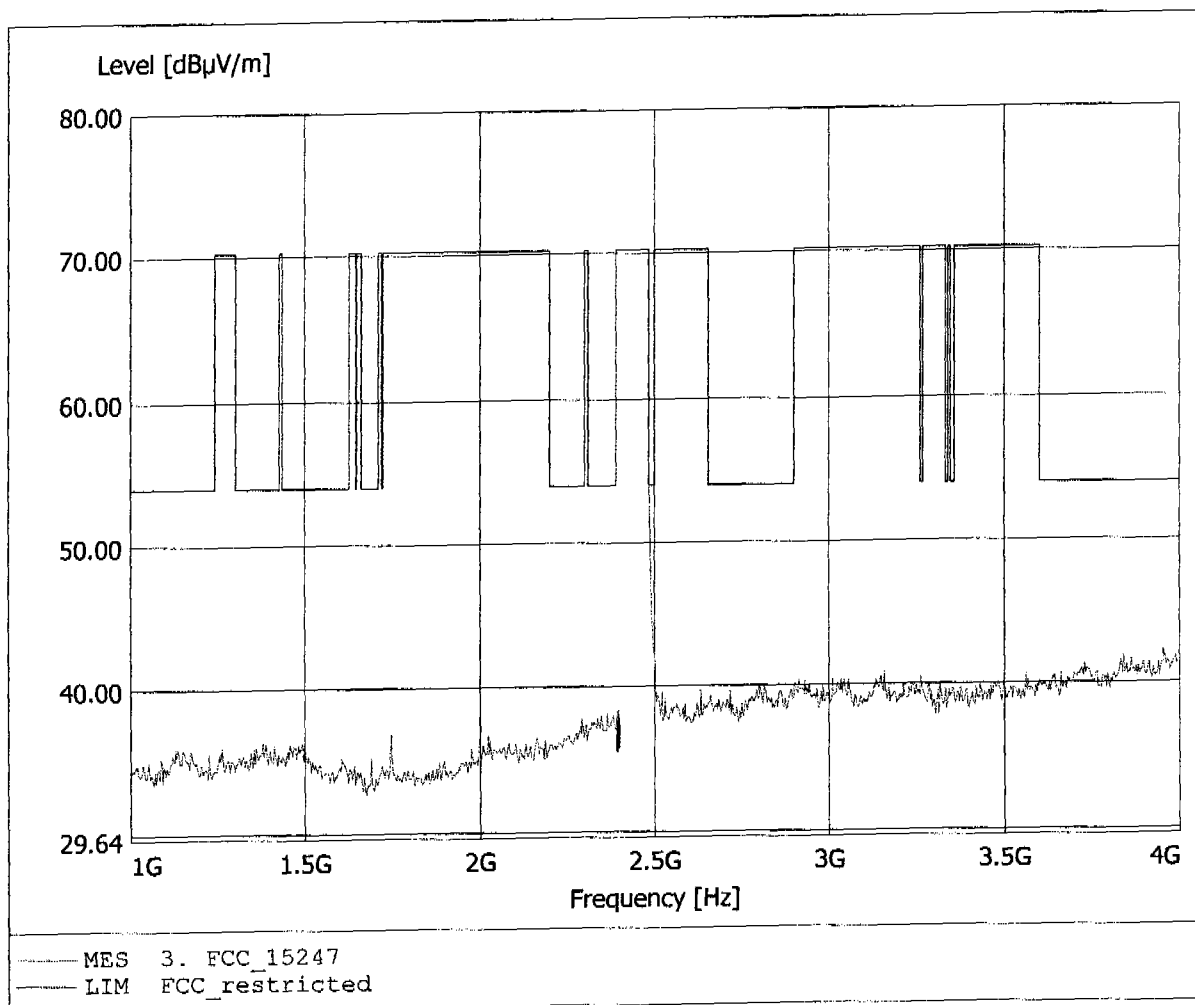


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 55.98dBµV/m, RBW: 1MHz

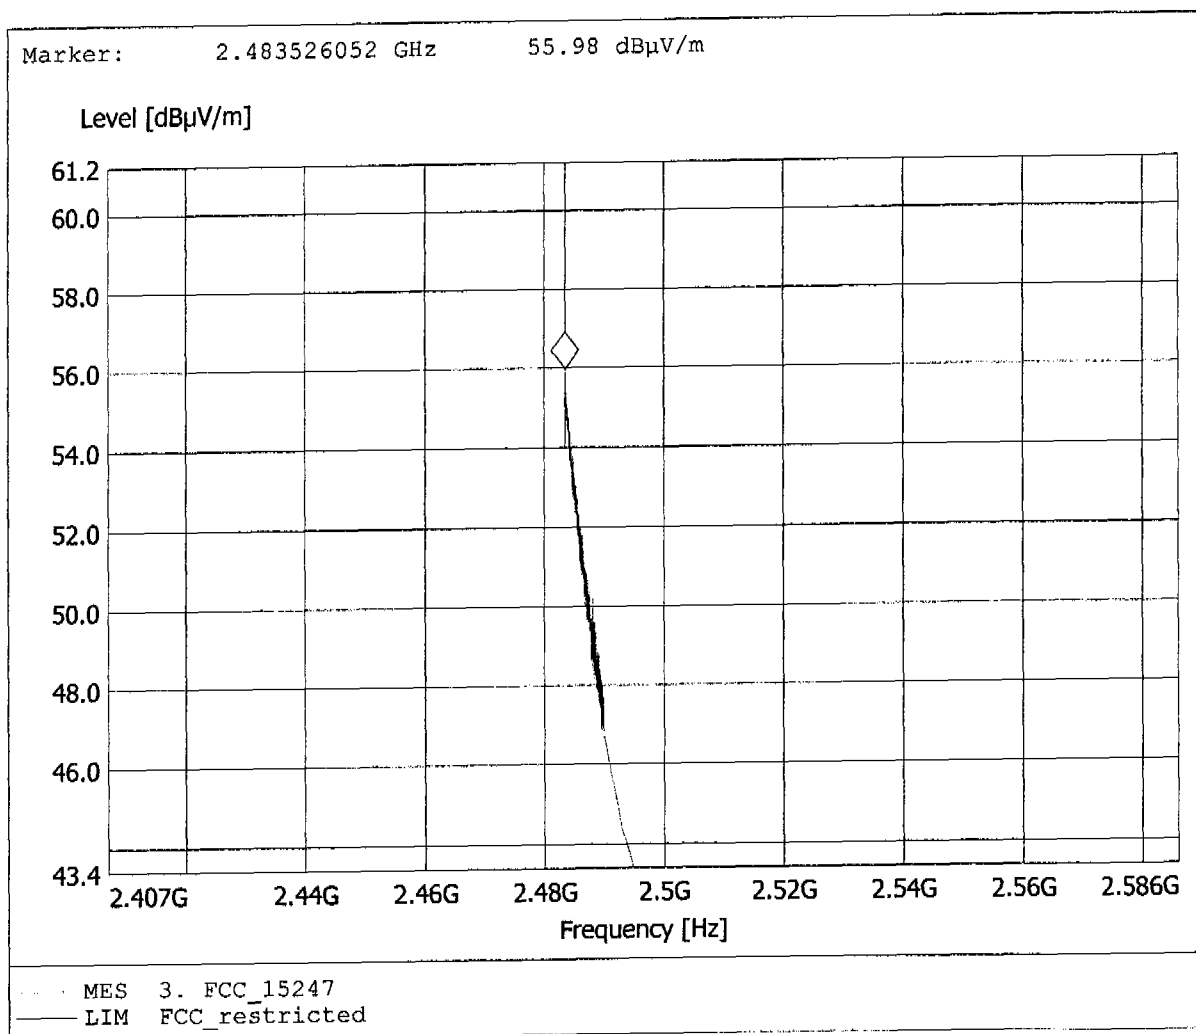


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.964GHz, Emax: 31.44dBuV/m, RBW: 1MHz

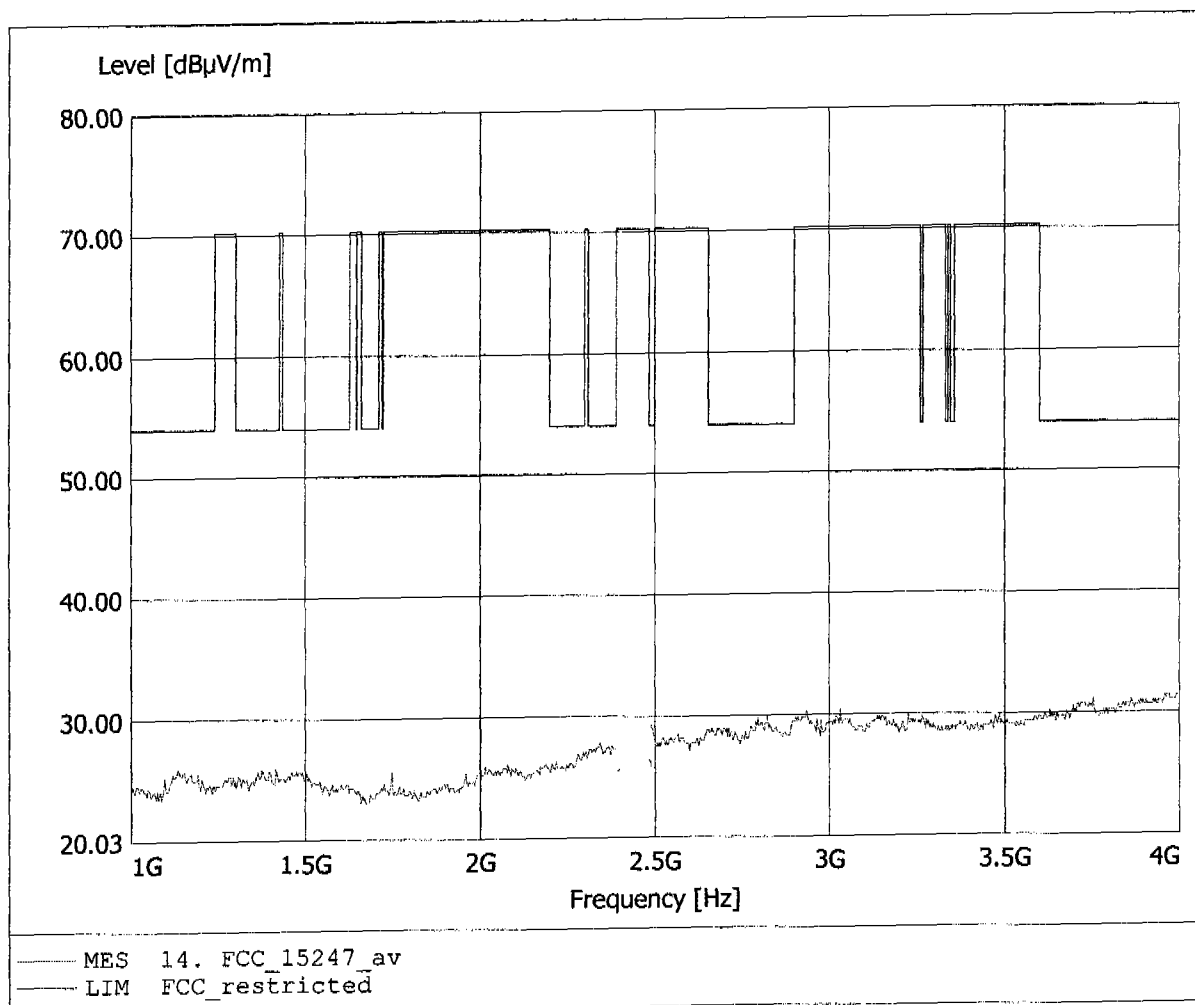


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 51.75dBμV/m, RBW: 1MHz

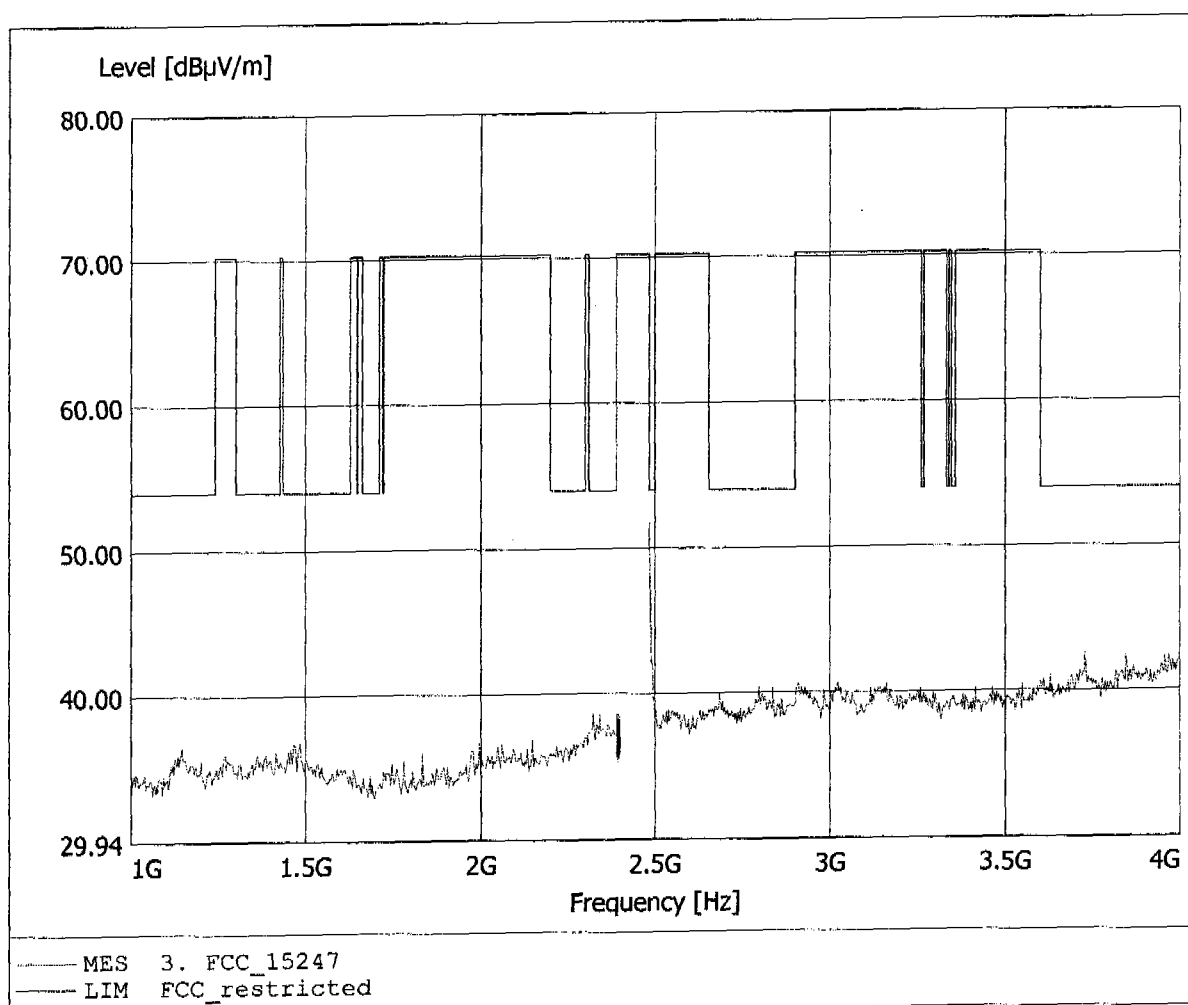


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 38.77dBμV/m, RBW: 1MHz

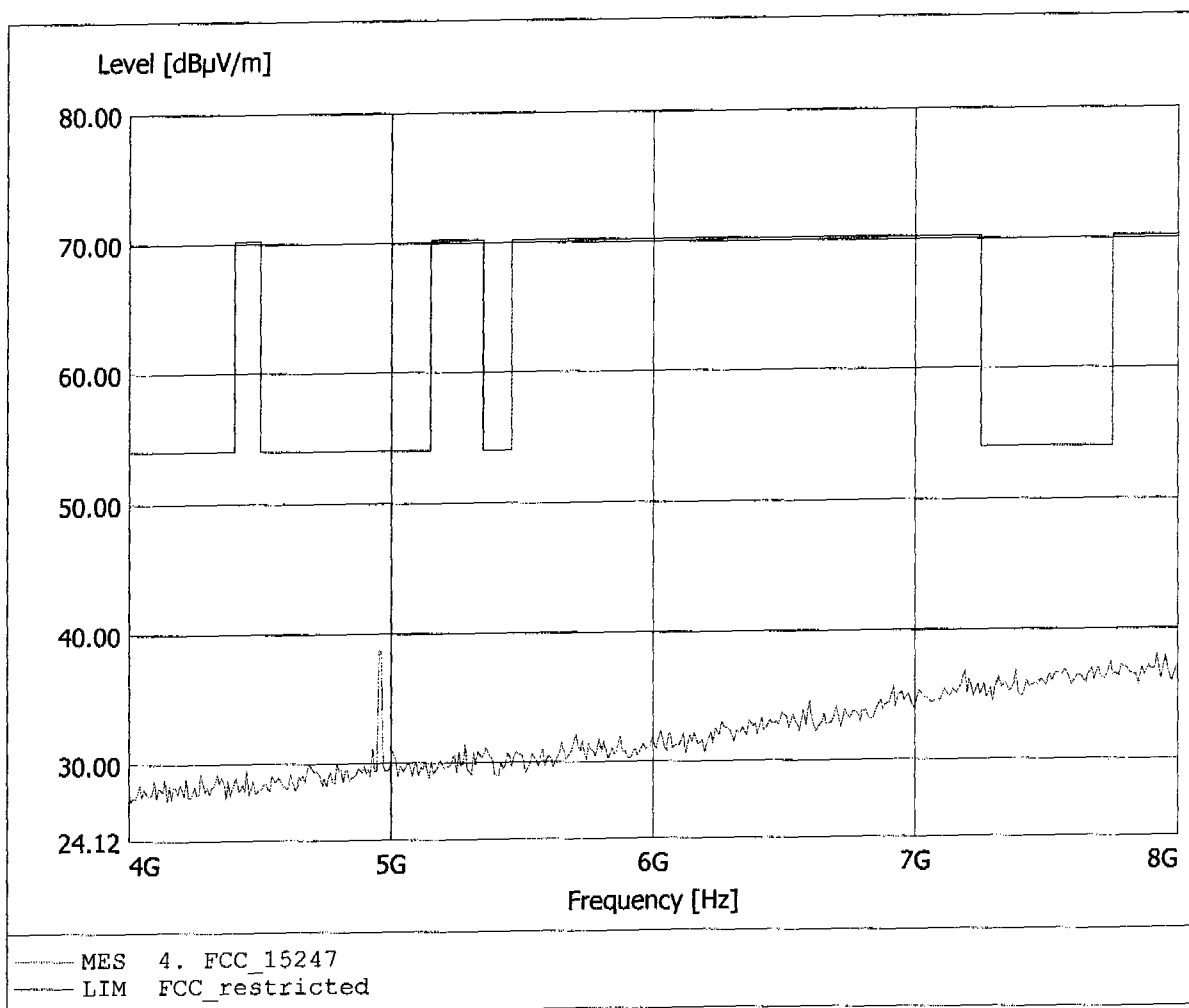


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.920GHz, Emax: 37.62dBμV/m, RBW: 1MHz

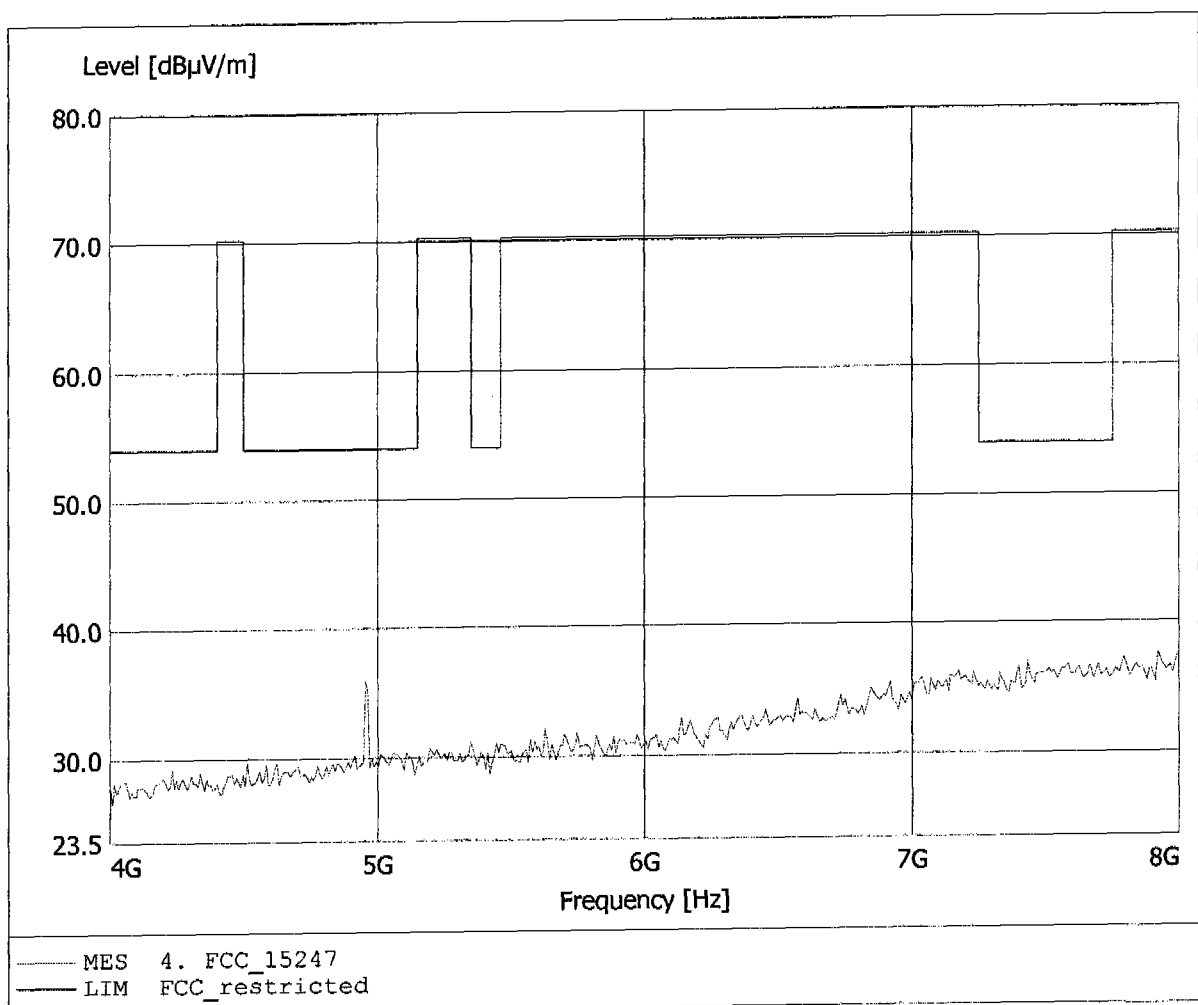


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.271GHz, Emax: 41.12dBµV/m, RBW: 1MHz

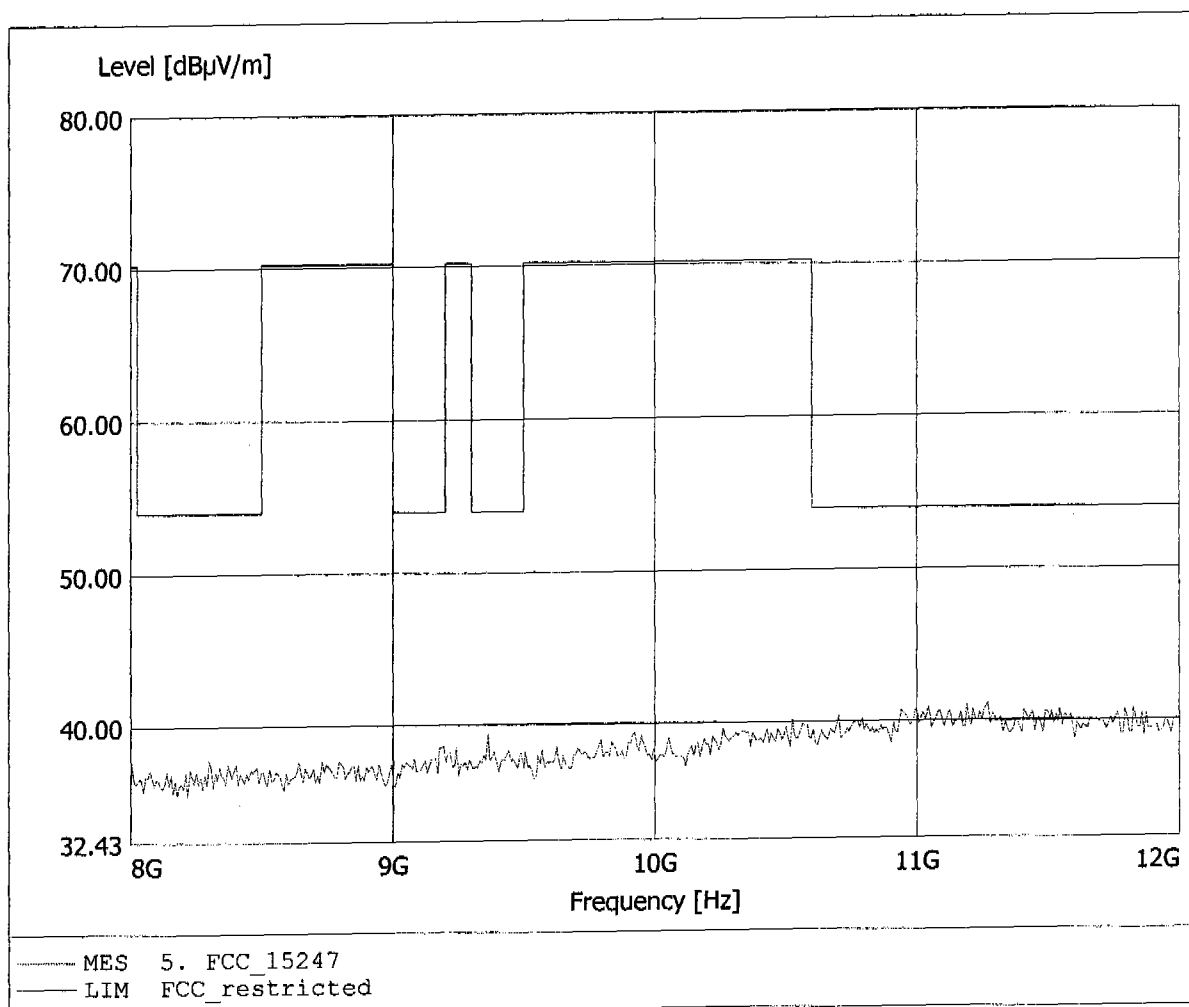


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.054GHz, Emax: 41.61dBμV/m, RBW: 1MHz

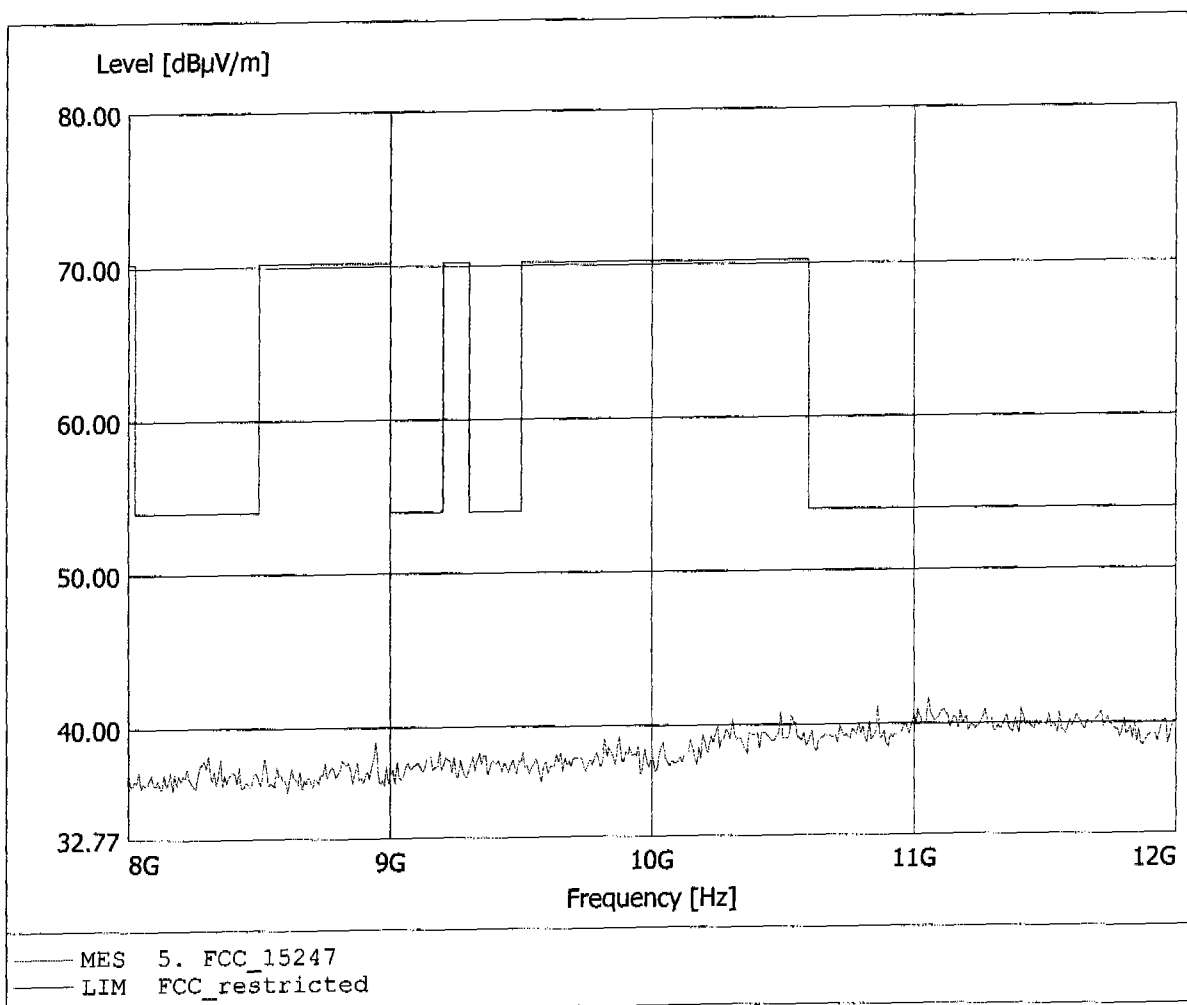


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.435GHz, Emax: 44.27dBµV/m, RBW: 1MHz

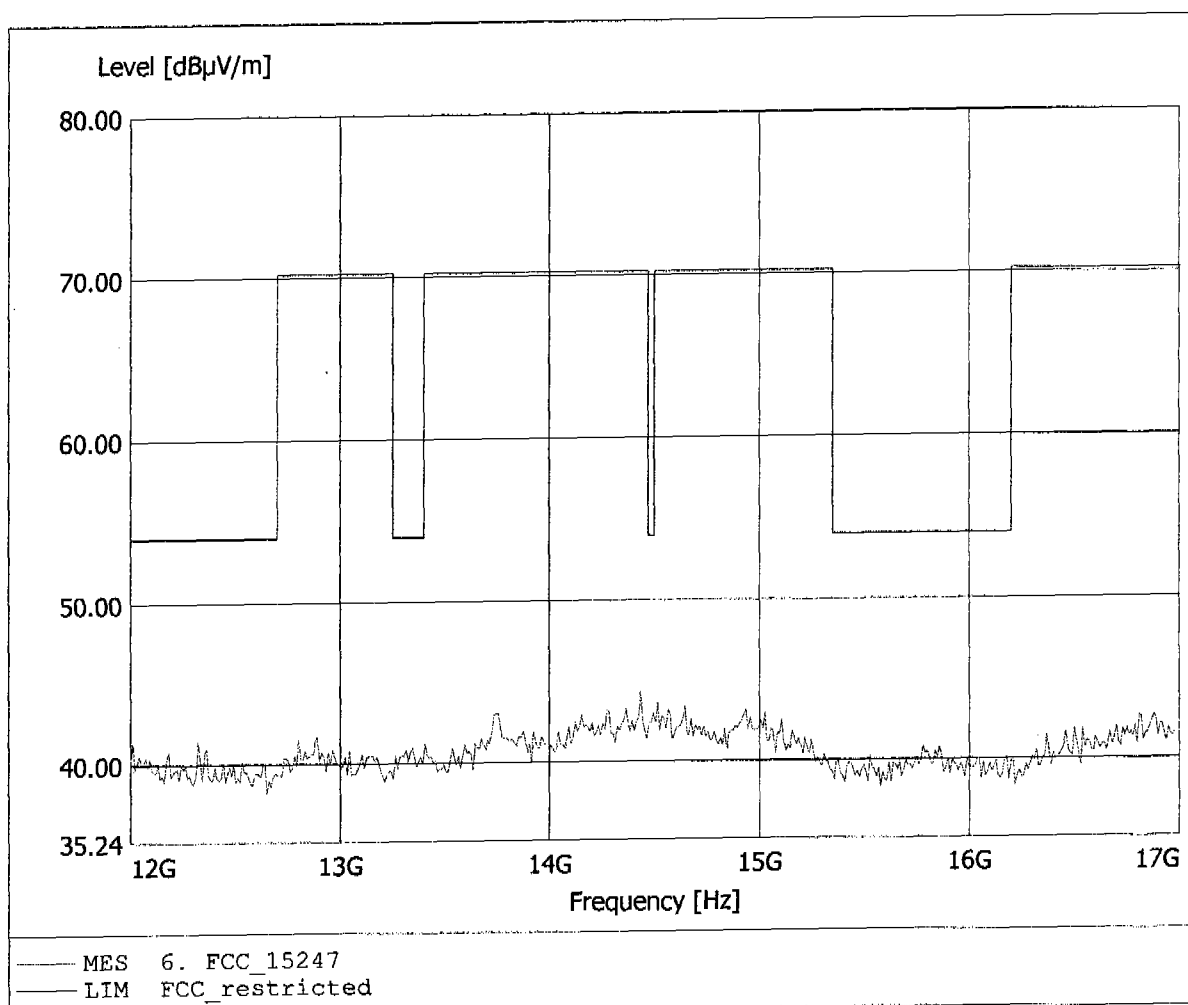


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.465GHz, Emax: 43.44dBuV/m, RBW: 1MHz

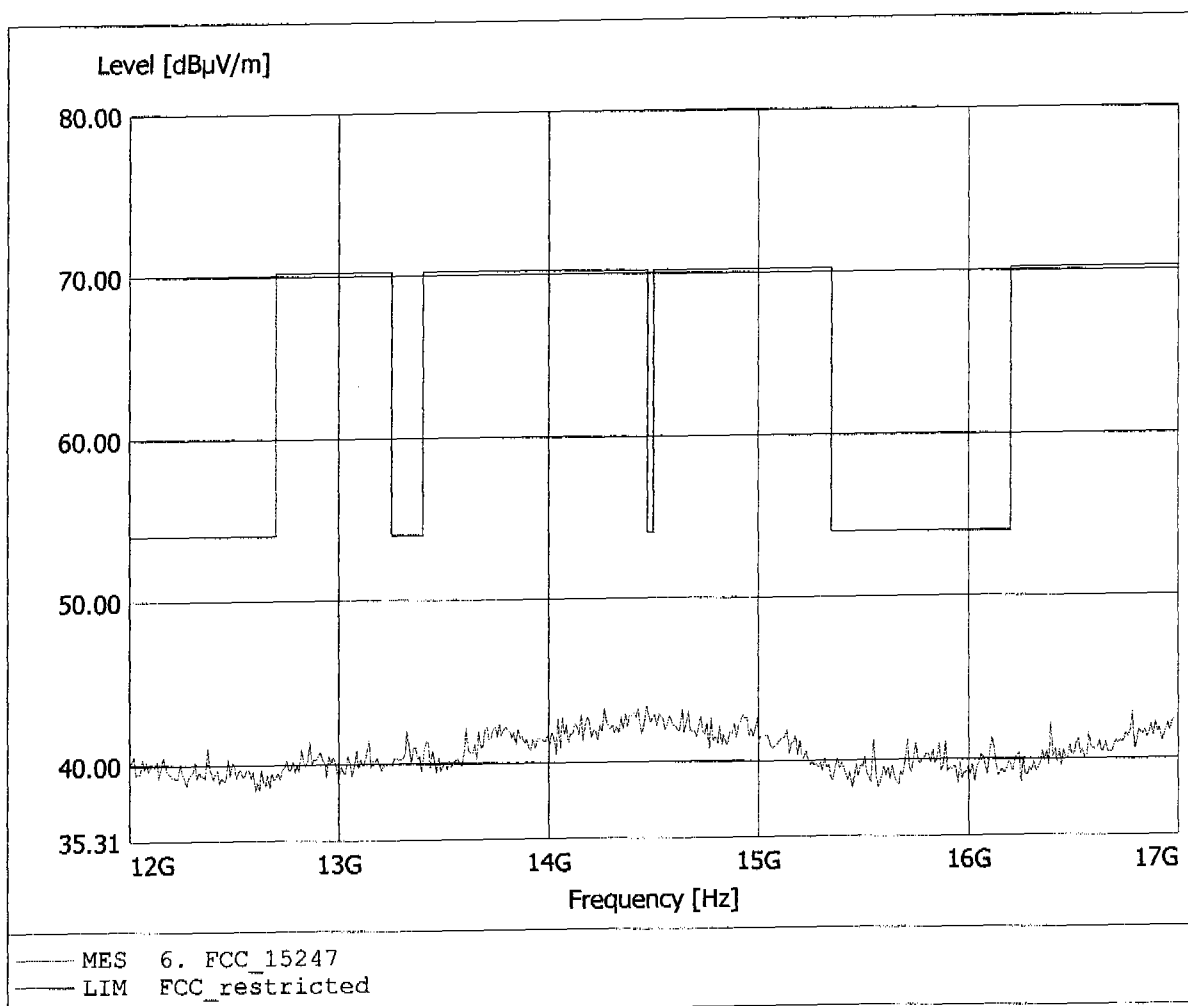


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.53dBμV/m, RBW: 1MHz

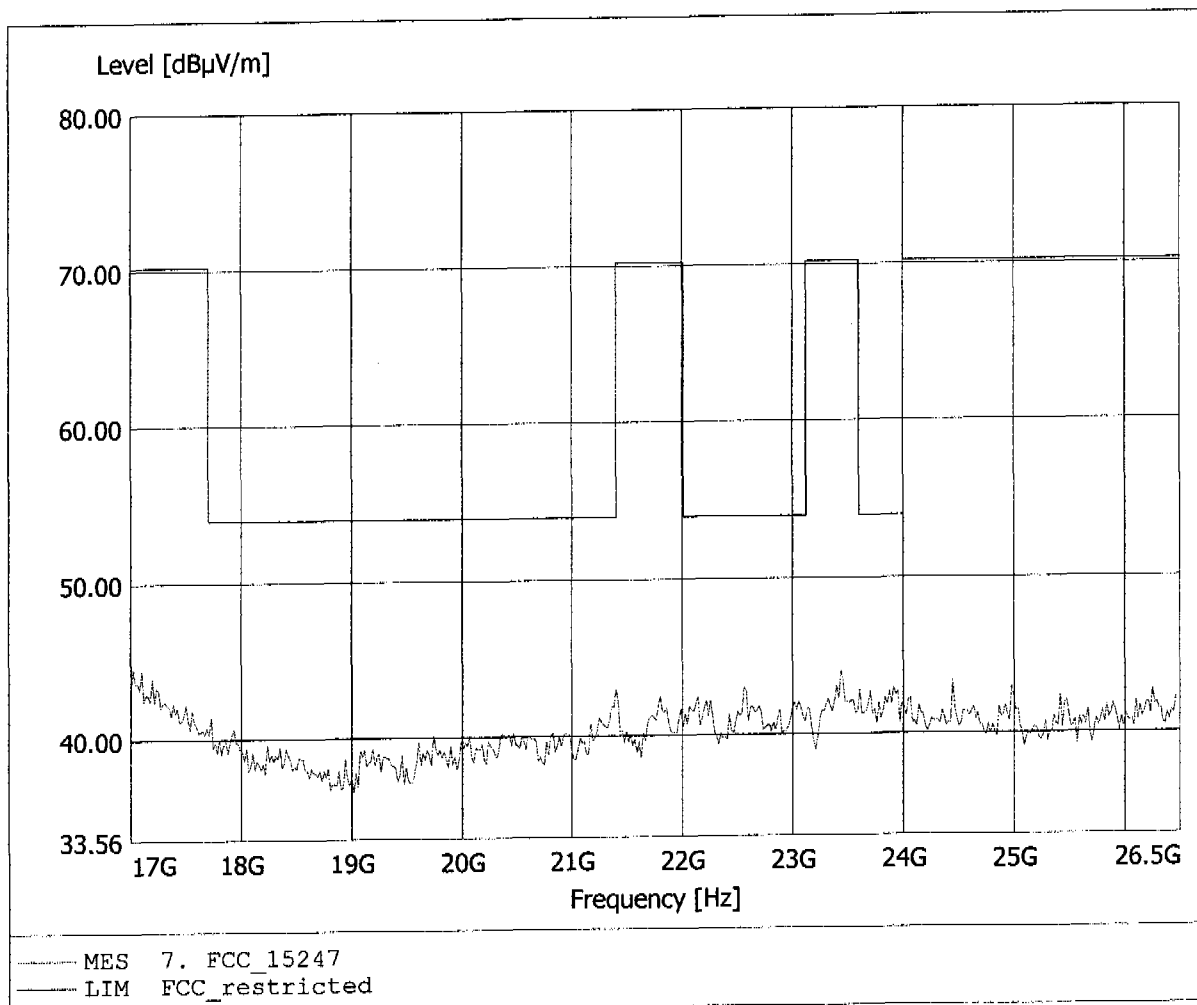

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Model: HSTNH-C01C / Pmax / 2480 MHz
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Tnom: 23°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.08dBuV/m, RBW: 1MHz

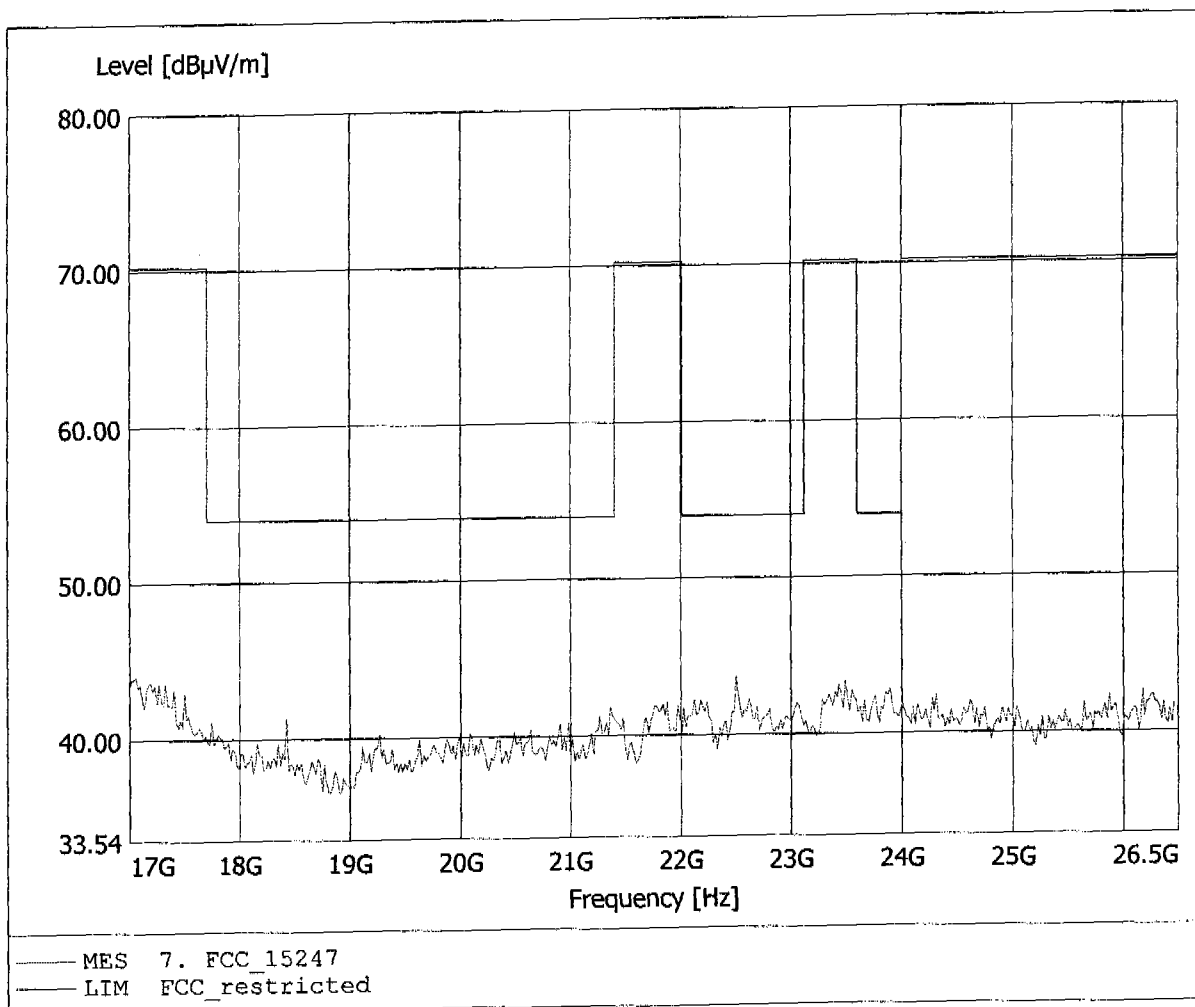

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.49 dB VBW 100 kHz
25 dBm 1.00080160 MHz SWT 5 ms Unit dBm

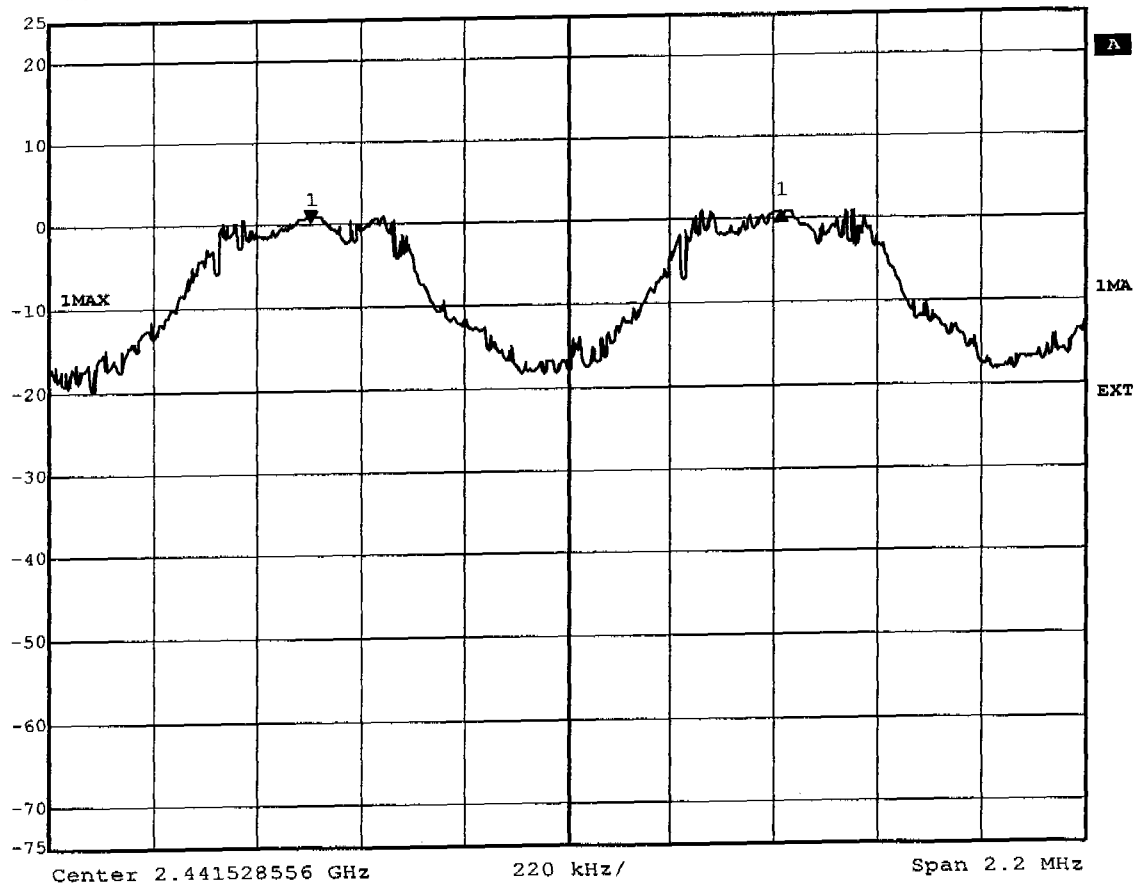


Title: Carrier Frequency Separation
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:20:39

Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.48 dBm VBW 300 kHz
25-dBm 2.41504910 GHz SWT 5 ms Unit dBm

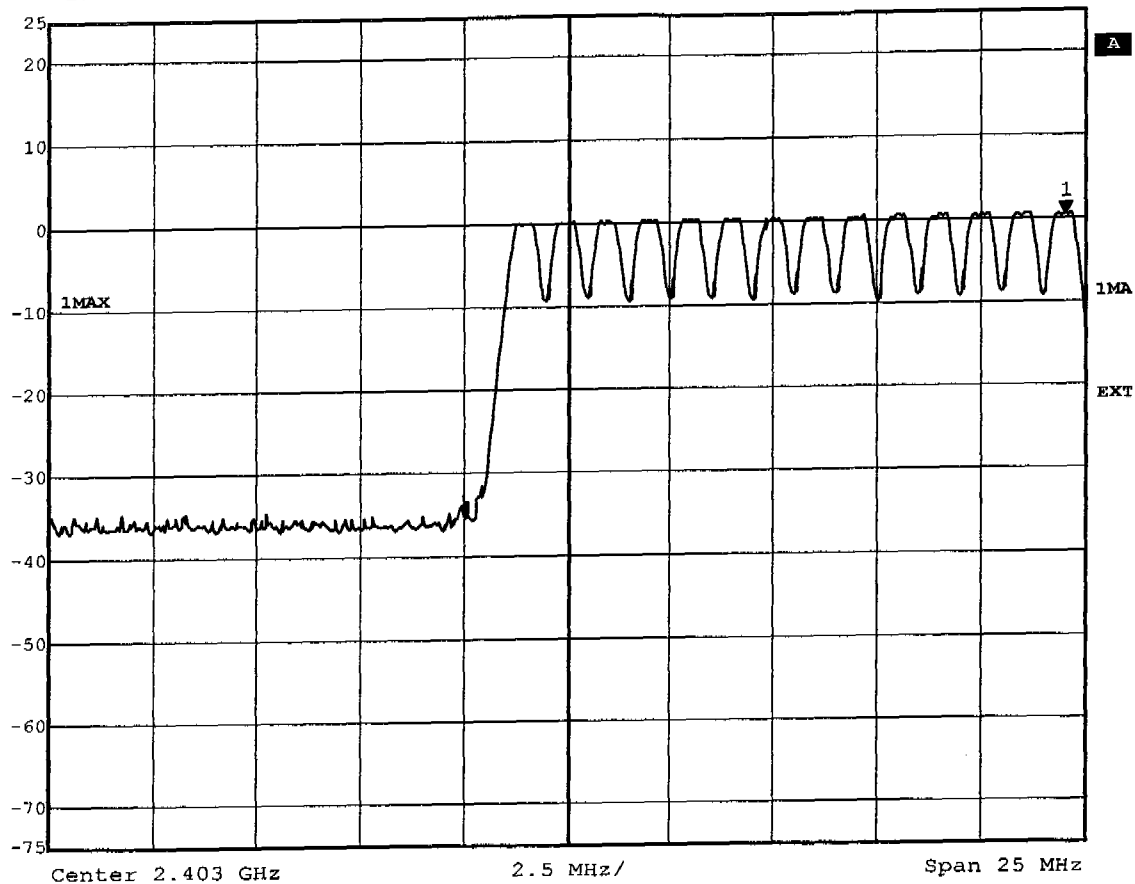

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:47:24




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.88 dBm VBW 300 kHz
25 dBm 2.43714329 GHz SWT 5 ms Unit dBm

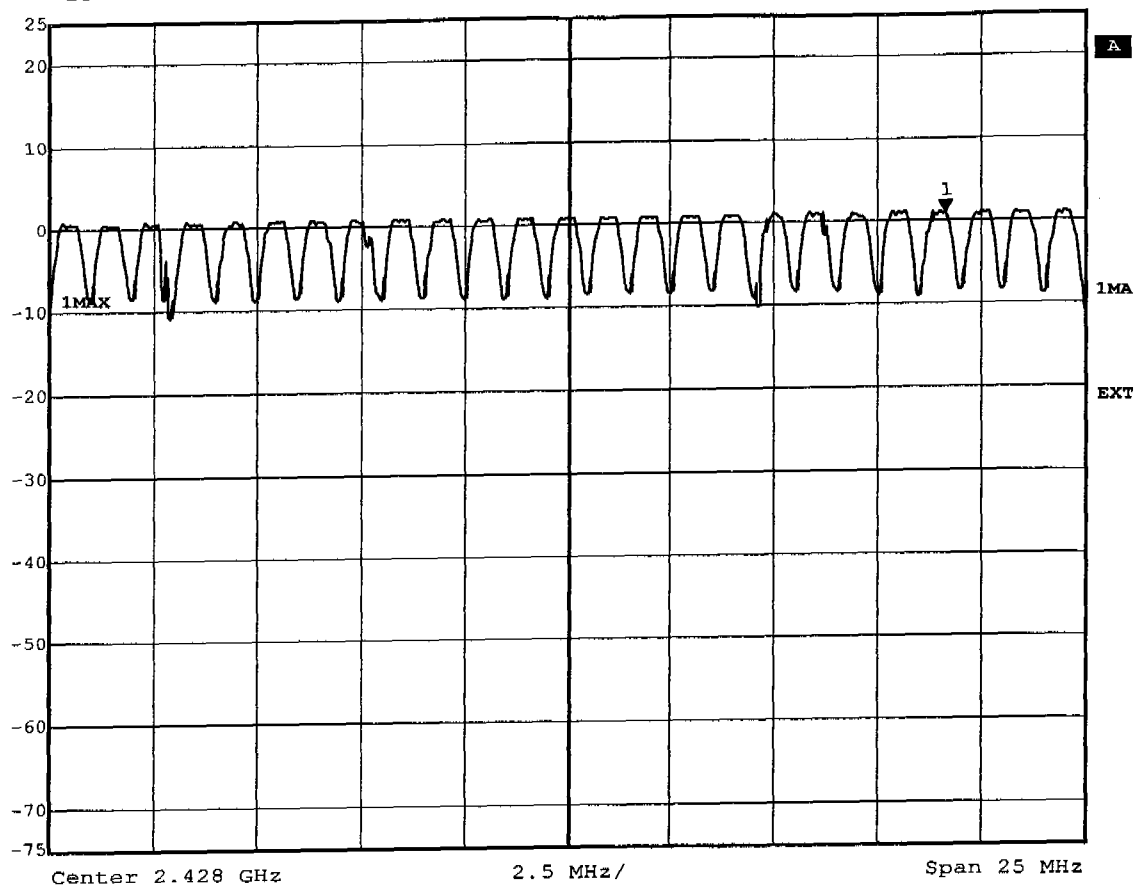

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:50:44




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.09 dBm VBW 300 kHz
25 dBm 2.46404709 GHz SWT 5 ms Unit dBm

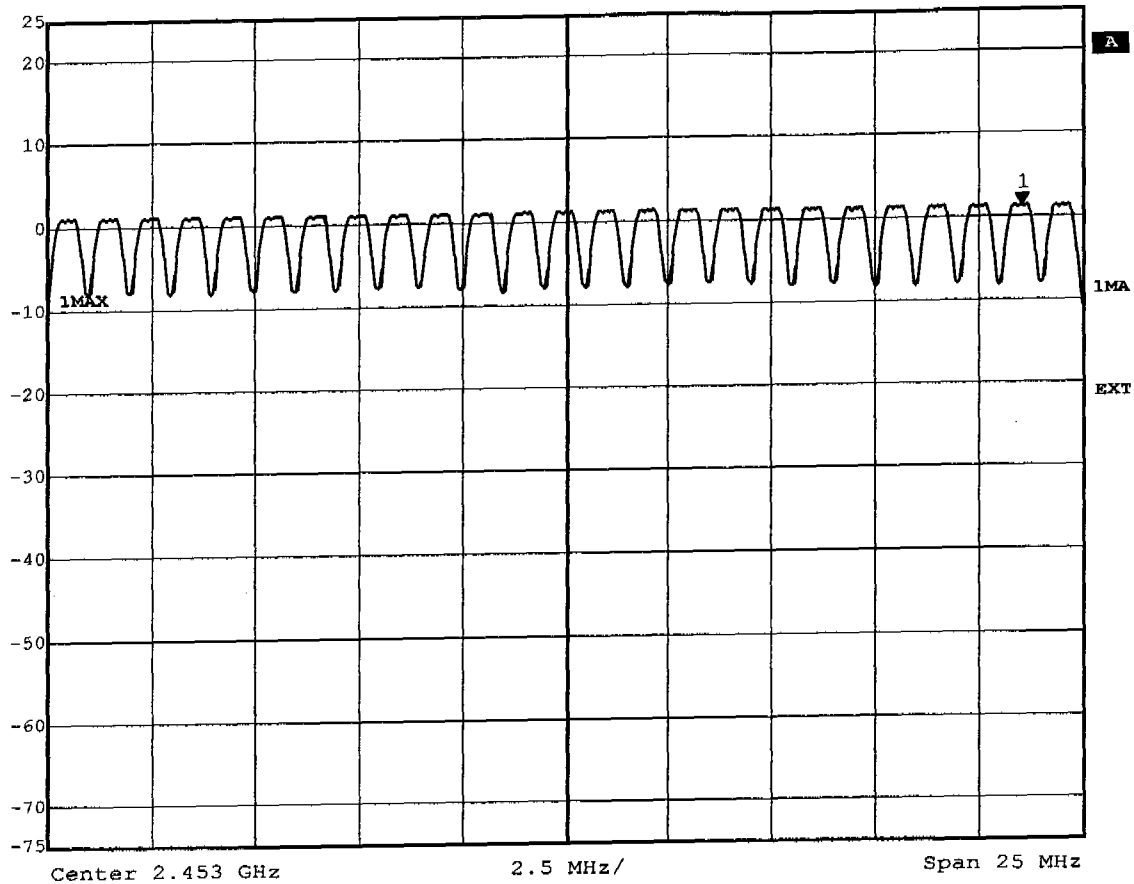

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:16:59




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.22 dBm VBW 300 kHz
25 dBm 2.48002906 GHz SWT 5 ms Unit dBm

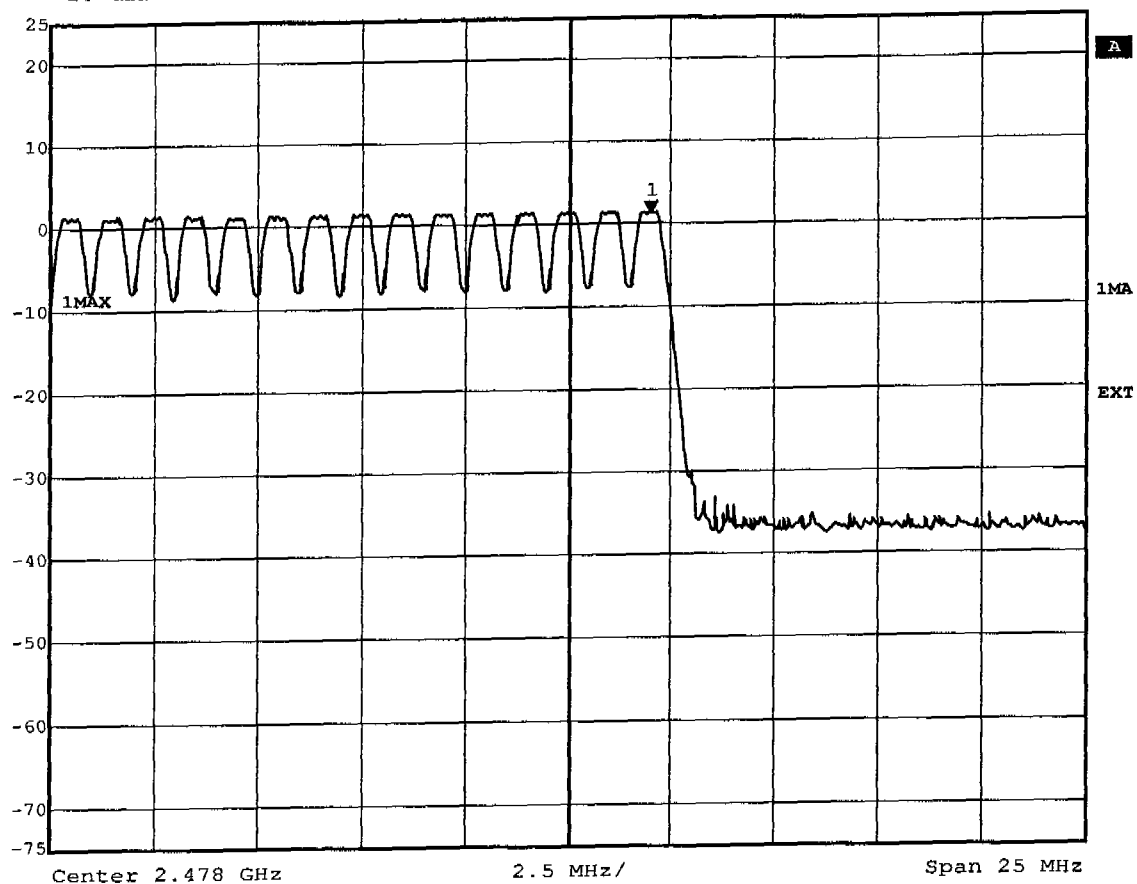

Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:21:37




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -3.68 dBm VBW 300 kHz
25 dBm 2.41204309 GHz SWT 5 ms Unit dBm

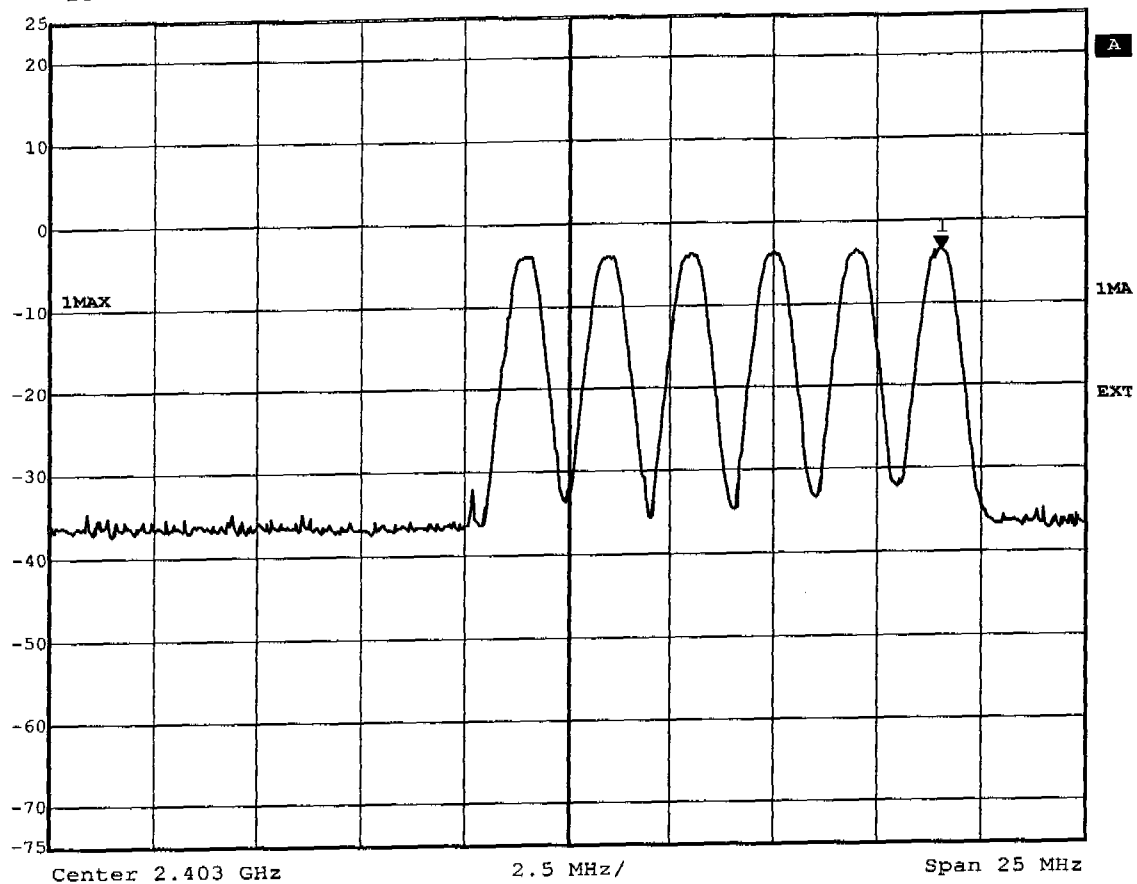

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:34:10




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -3.06 dBm VBW 300 kHz
25 dBm 2.43899699 GHz SWT 5 ms Unit dBm

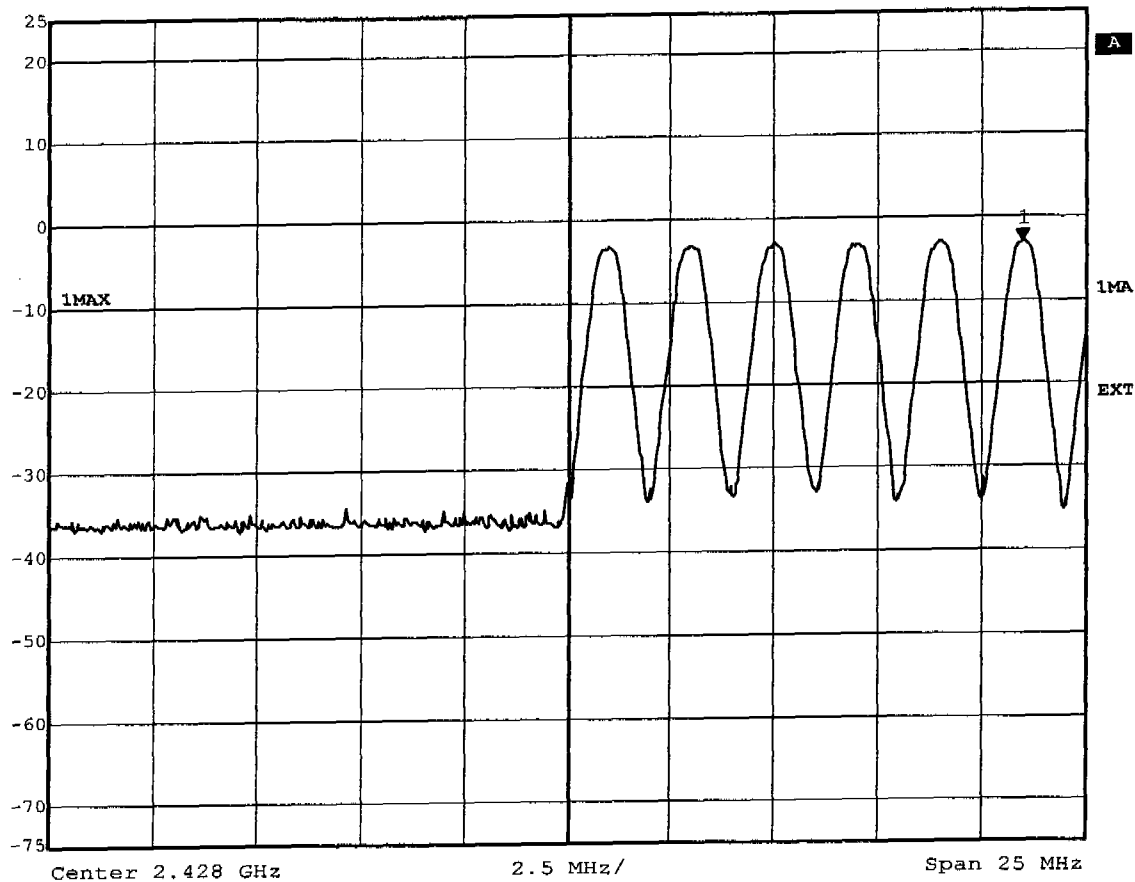

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:37:41




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
-2.79 dBm VBW 300 kHz
2.46304509 GHz SWT 5 ms Unit dBm
Ref Lvl 25 dBm

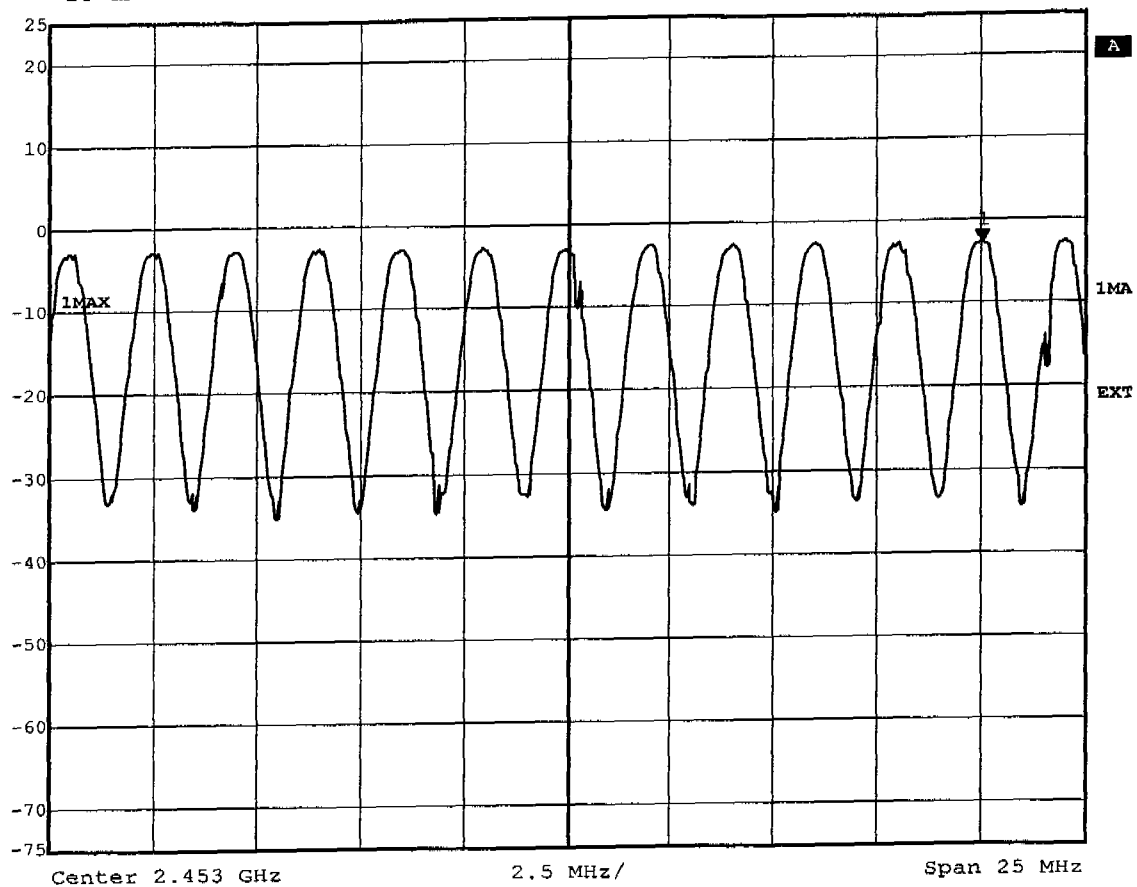

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:41:03



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -2.69 dBm VBW 300 kHz
25 dBm 2.47902705 GHz SWT 5 ms Unit dBm

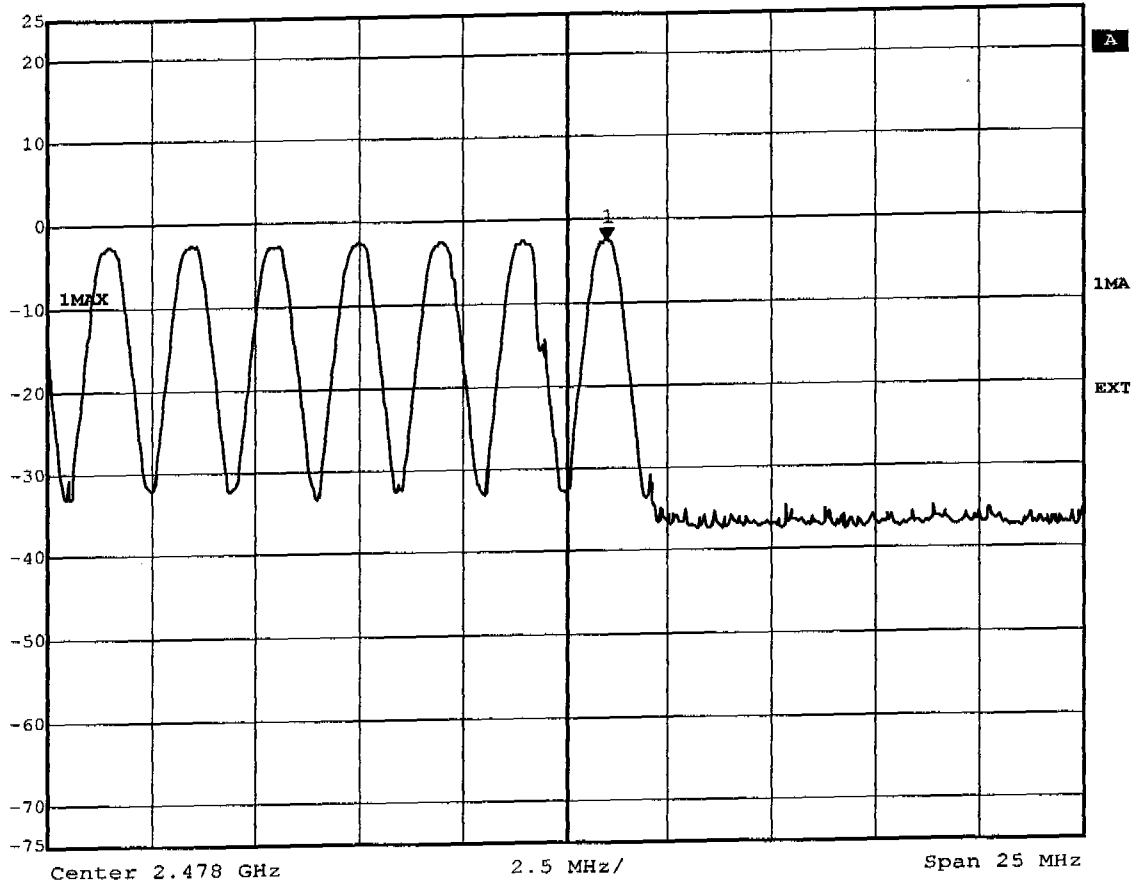


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:44:37

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 (T1) RBW 1 MHz RF Att 20 dB
Ref Lvl -0.01 dB VBW 1 MHz
5 dBm 2.865731 ms SWT 5 ms Unit dBm

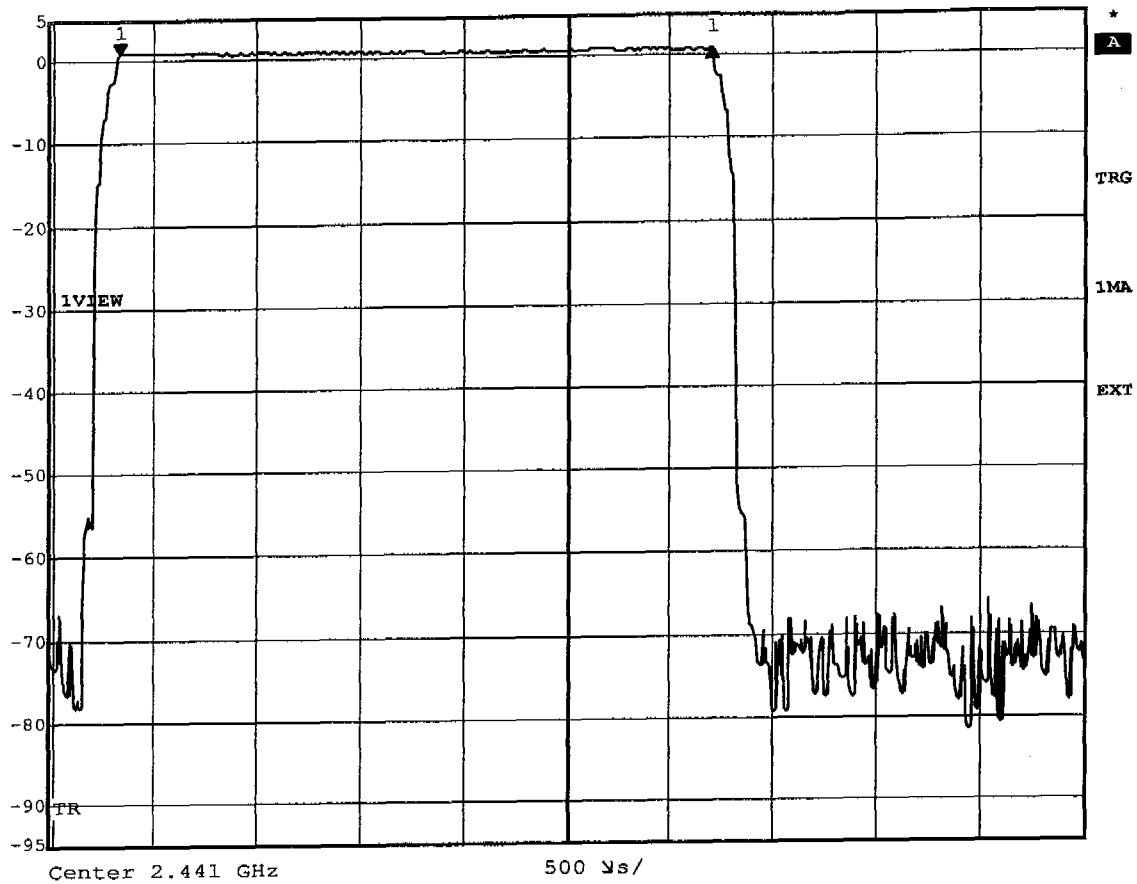

Title: Time of occupancy (Hopping DH5) 63 events * 2.865ms=180.5ms
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:42:22




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 3.82 dB VBW 1 MHz
5 dBm 98.870942 μ s SWT 300 μ s Unit dBm

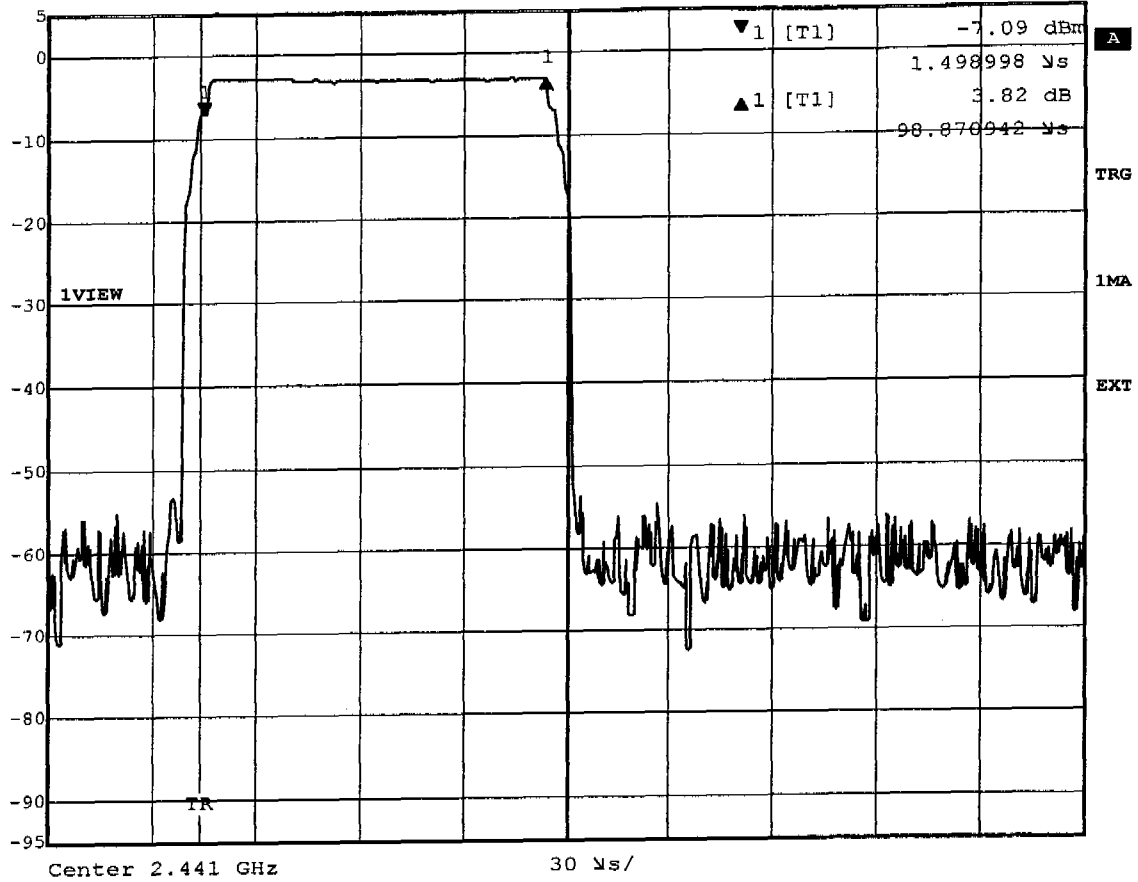

Title: Time of occupancy (Inquiry mode) 634 events * 0.117ms=11.9ms
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 13:31:48



Delta 2 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 0.06 dB VBW 1 MHz
30 dBm 1.252721 ms SWT 1.65 ms Unit dBm

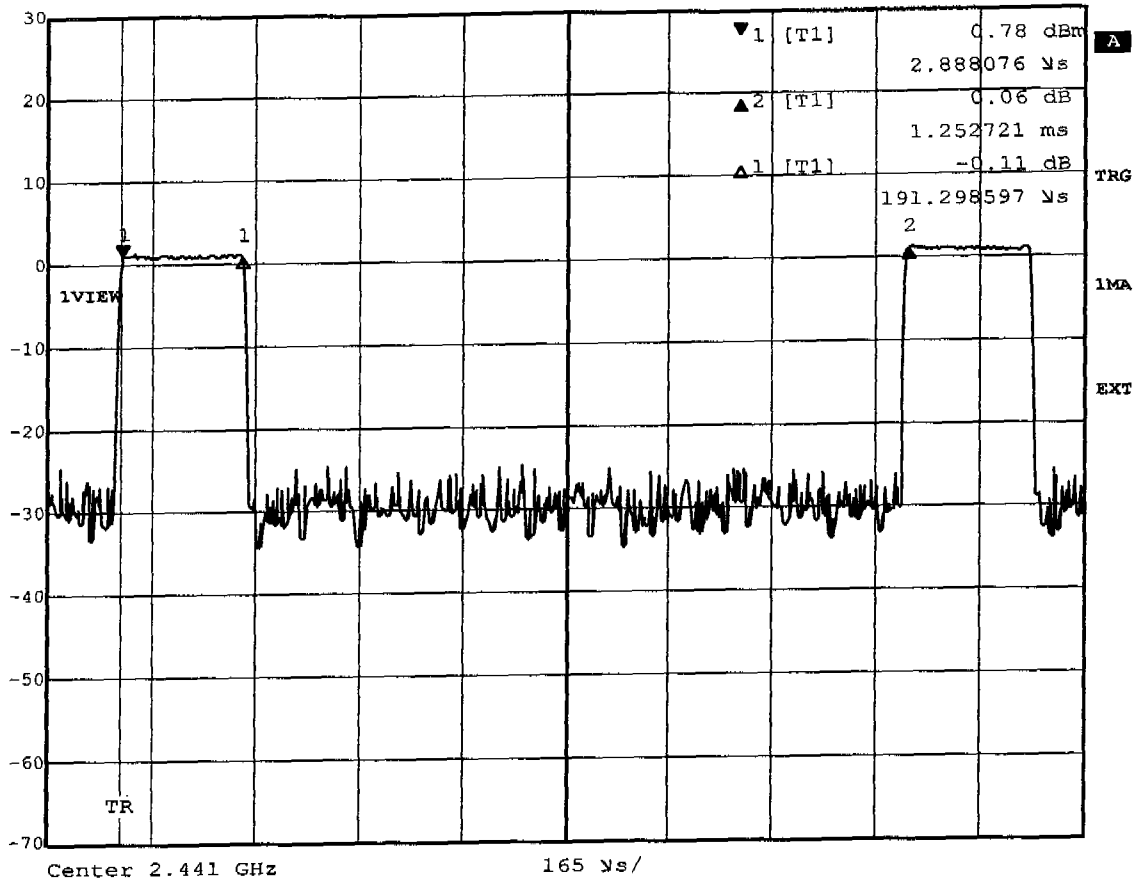


Title: Duty Cycle
Comment A: Compal HstnH-C01C
Date: 13.DEC.2003 14:11:23

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.12 dB VBW 10 kHz
25 dBm 740.68136272 kHz SWT 56 ms Unit dBm

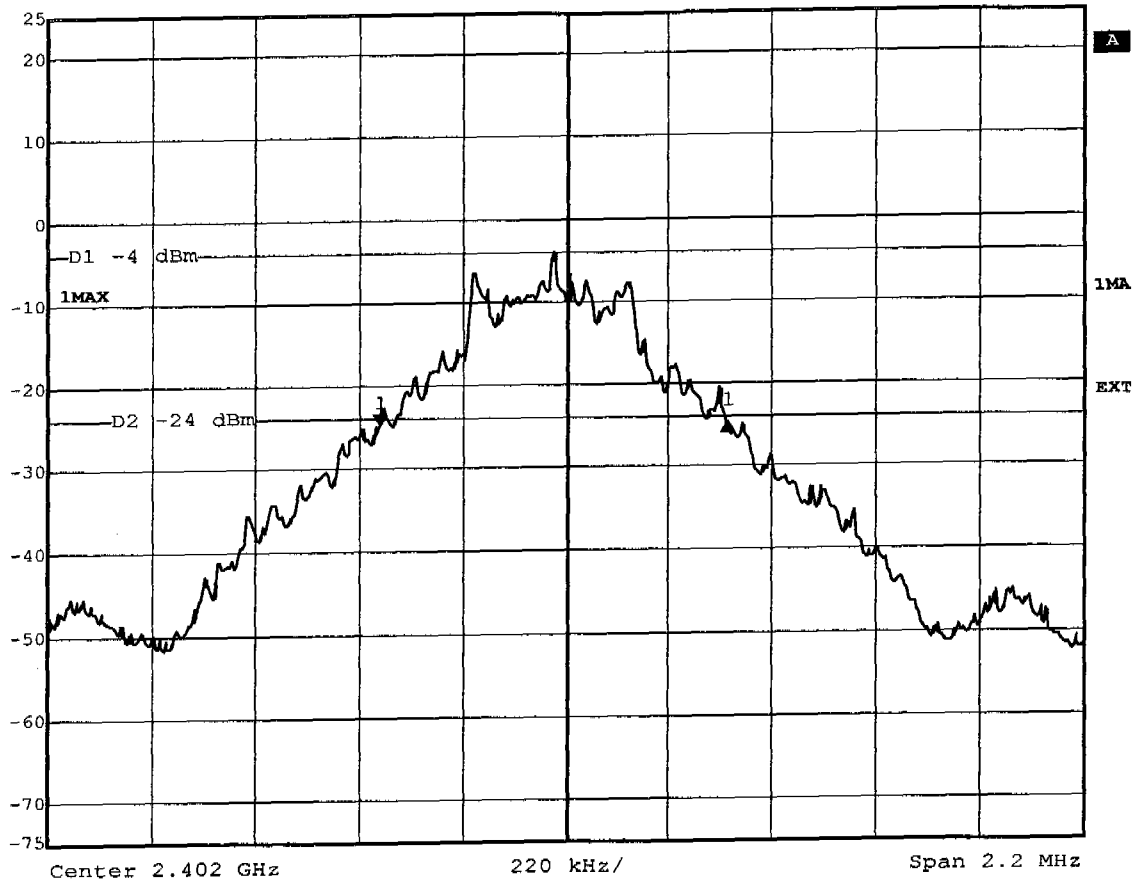

Title: -20dB Bandwidth Ch.: 0
Comment A: HSTNH-C01C
Date: 13.DEC.2003 11:02:46




Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	-0.31 dB	VBW	10 kHz	
25 dBm	740.68136273 kHz	SWT	56 ms	Unit dBm

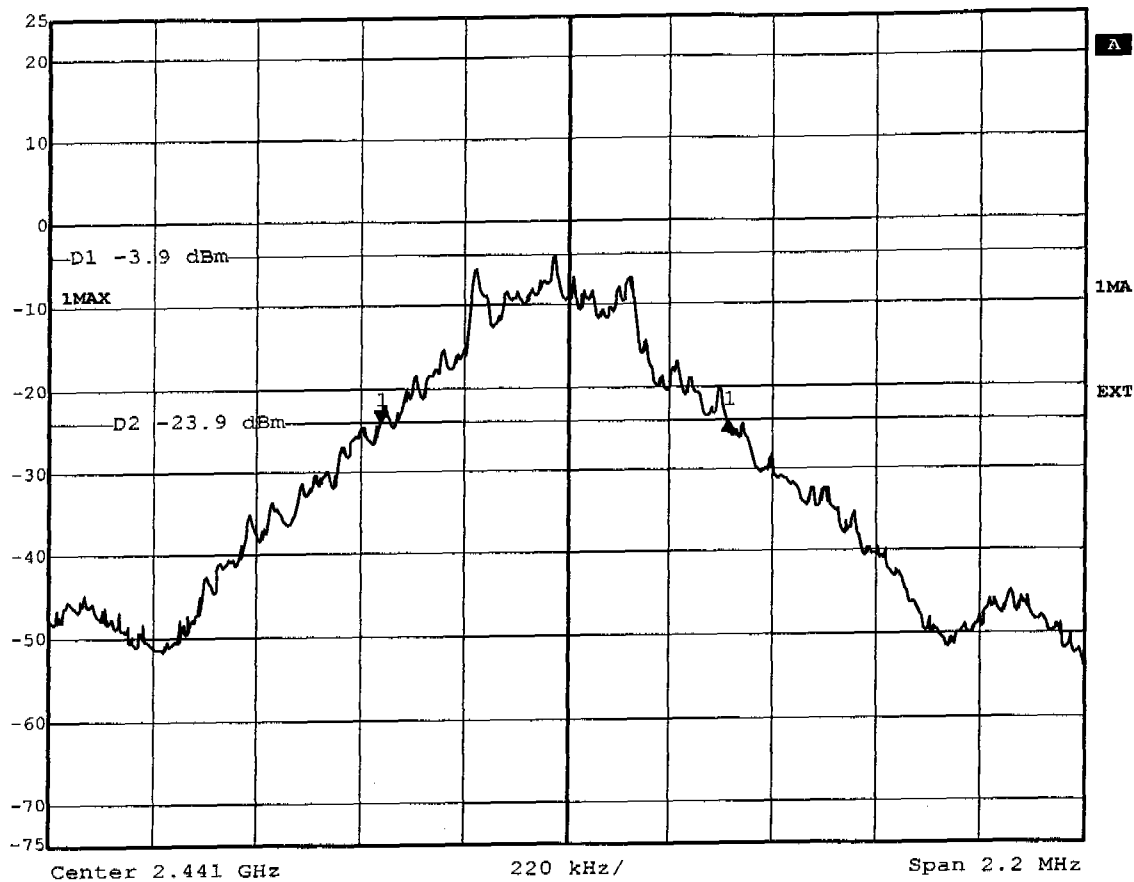

Title: -20dB Bandwidth Ch.: 39
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 11:09:28



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.24 dB VBW 10 kHz
25 dBm 740.68136273 kHz SWT 56 ms Unit dBm

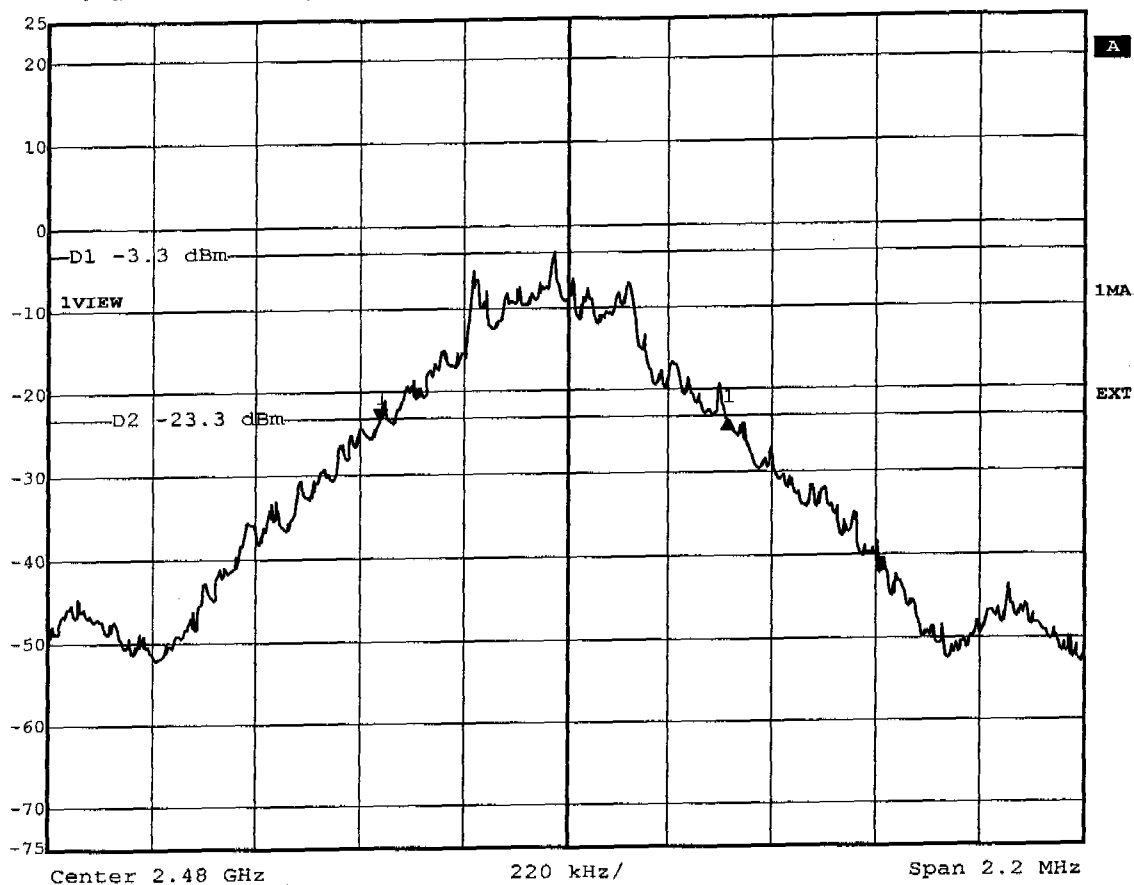


Title: -20dB Bandwidth Ch.: 78
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 11:12:18

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.72 dB VBW 50 kHz
25 dBm 2.00300601 MHz SWT 5 ms Unit dBm

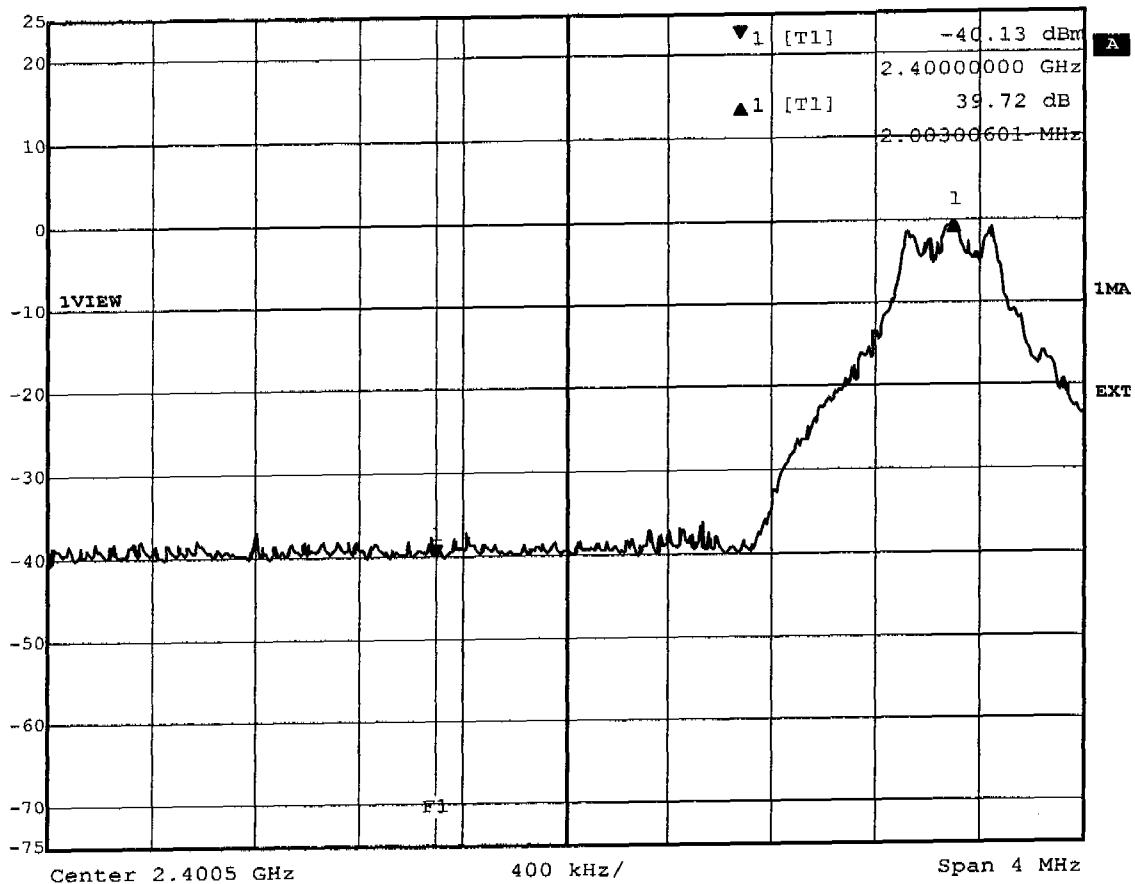

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Compal HSTNH-C01C
Date: 15.DEC.2003 06:49:52




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 40.17 dB VBW 50 kHz
25 dBm -3.35498998 MHz SWT 5 ms Unit dBm

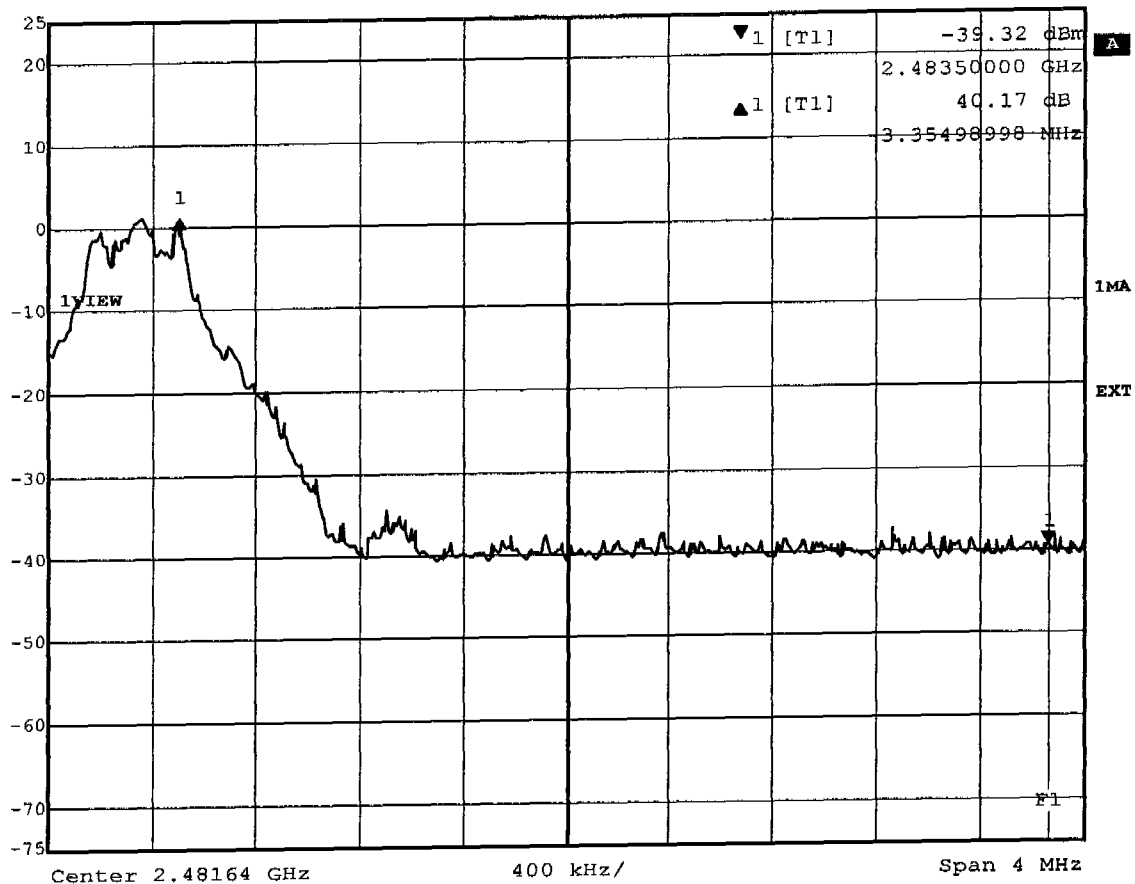

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Compal HSTNH-C01C
Date: 15.DEC.2003 06:53:06




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.00 dB VBW 50 kHz
25 dBm 2.00300601 MHz SWT 5 ms Unit dBm

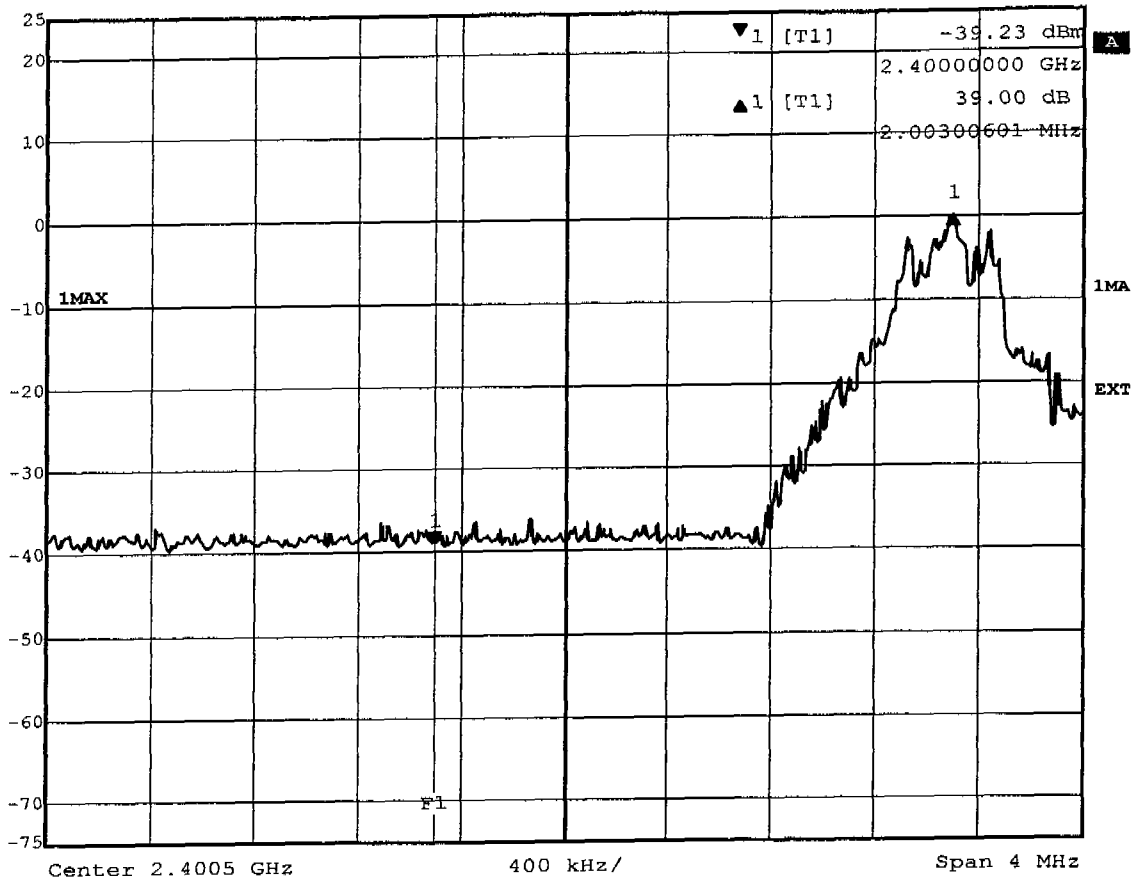

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:24:26



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.87 dB VBW 50 kHz
25 dBm -3.37102204 MHz SWT 5 ms Unit dBm

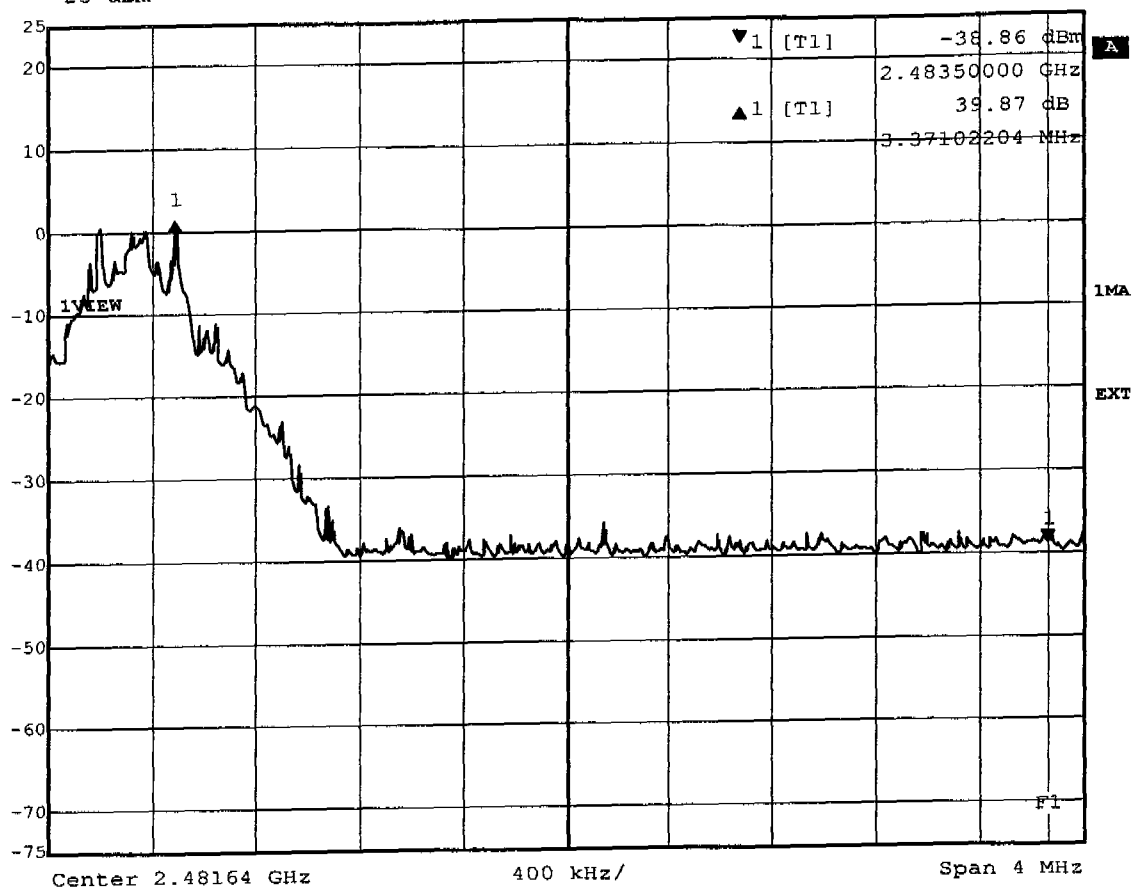


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Compal HSTNH-C01C
Date: 13.DEC.2003 12:30:33

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 VAC (AC/DC-adaptor ADP-10SB REV.BH) Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: HSTNH-C01C mode: GSM + BT + WLAN link
charger + headset connected

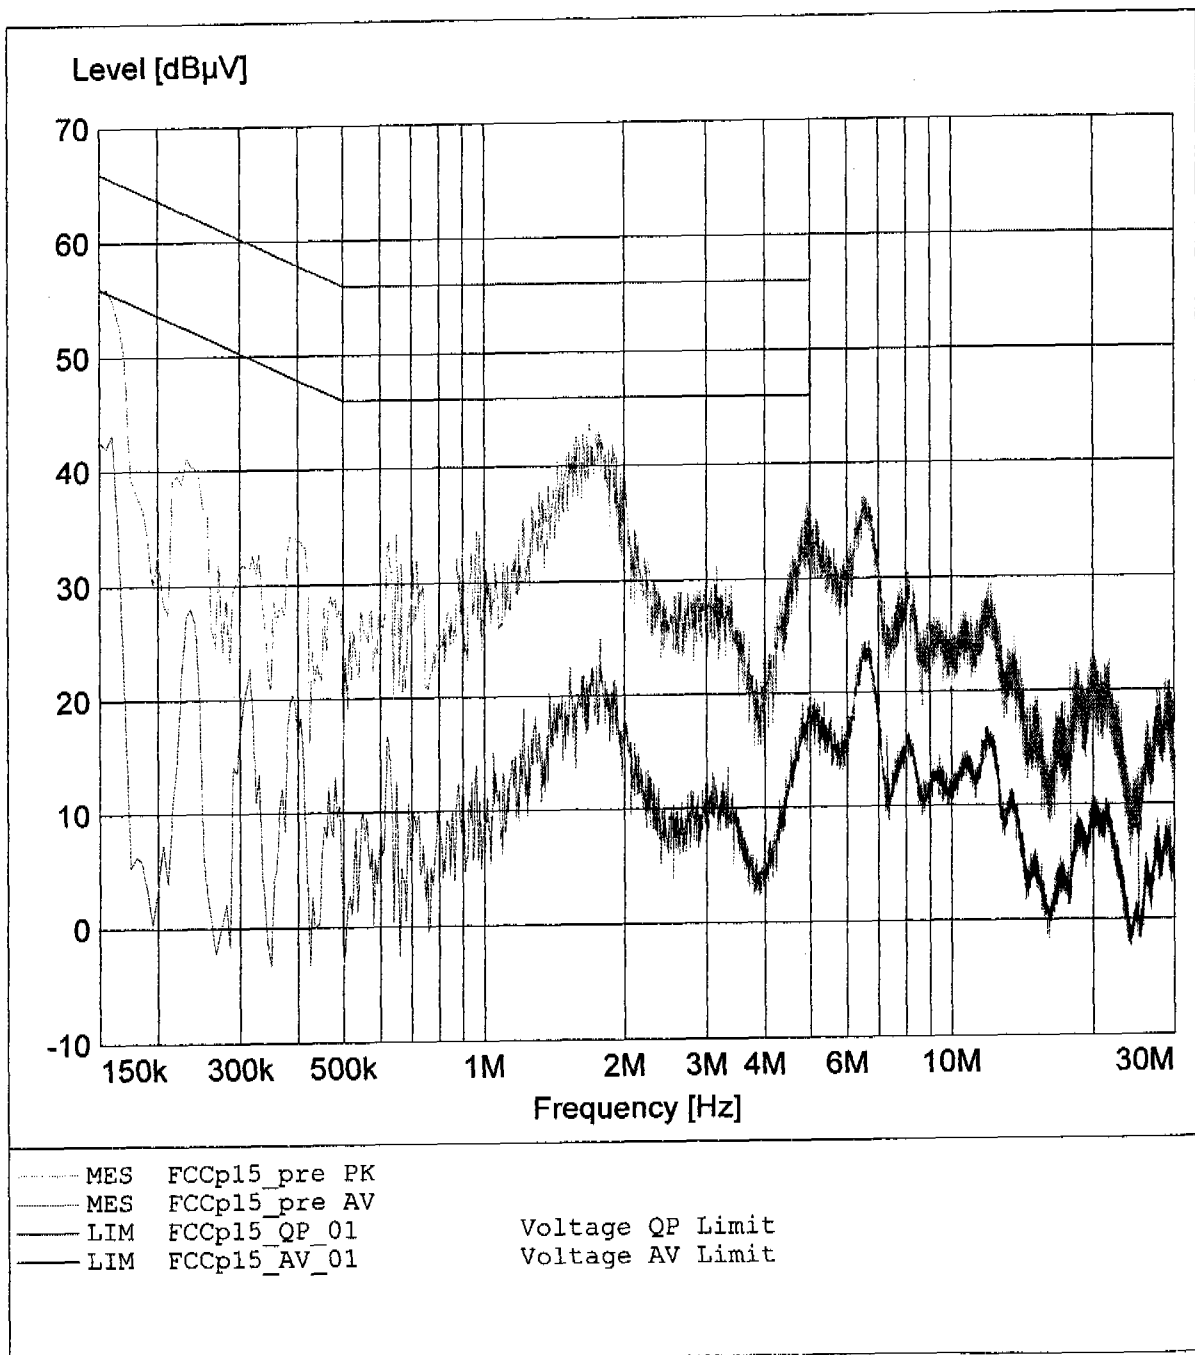

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA with Quad-Band GPRS/GSM+WLAN+BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 VAC (AC/DC-adaptor ADP-10SB REV.BH) Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: HSTNH-C01C mode: GSM + BT + WLAN link
charger + headset connected

