

**CFR 47 FCC PART 15 SUBPART C****TEST REPORT***For***Wifi module****MODEL NUMBER: VB-Wifi-IN03****REPORT NUMBER: 4791717723-1-RF-3****ISSUE DATE: April 3, 2025****FCC ID: GSS-IN03***Prepared for***ViewSonic Corporation  
10 Pointe Dr. Suite 200, Brea, CA 92821, USA***Prepared by***UL Verification Services (Guangzhou) Co., Ltd., Song Shan Lake Branch****Room 101, Building 2, Zhihui City Phase I, No.4, Information Road, Songshan Lake,  
Dongguan, Guangdong, China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 3, 2025	Initial Issue	

## Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST .....</i>	<i>9</i>
5.3. <i>MAXIMUM POWER .....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>12</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>13</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
7.1. <i>CONDUCTED OUTPUT POWER.....</i>	<i>17</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY .....</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>21</i>
7.5. <i>DUTY CYCLE.....</i>	<i>23</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>24</b>
8.1. <i>RESTRICTED BANDEdge .....</i>	<i>31</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....</i>	<i>57</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....</i>	<i>63</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....</i>	<i>99</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....</i>	<i>102</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ) .....</i>	<i>104</i>
<b>9. ANTENNA REQUIREMENT .....</b>	<b>106</b>
<b>10. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>107</b>
<b>11. TEST DATA.....</b>	<b>111</b>

11.1.	<i>APPENDIX A: DTS BANDWIDTH</i> .....	111
11.1.1.	Test Result.....	111
11.1.2.	Test Graphs .....	112
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i> .....	118
11.2.1.	Test Result.....	118
11.2.2.	Test Graphs .....	119
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i> .....	125
11.3.1.	Test Result.....	125
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i> .....	126
11.4.1.	Test Result.....	126
11.4.2.	Test Graphs .....	127
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i> .....	133
11.5.1.	Test Result.....	133
11.5.2.	Test Graphs .....	134
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i> .....	138
11.6.1.	Test Result.....	138
11.6.2.	Test Graphs .....	139
11.7.	<i>APPENDIX G: DUTY CYCLE</i> .....	157
11.7.1.	Test Result.....	157
11.7.2.	Test Graphs .....	158

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: ViewSonic Corporation  
Address: 10 Pointe Dr. Suite 200, Brea, CA 92821, USA

### Manufacturer Information

Company Name: ViewSonic Corporation  
Address: 10 Pointe Dr. Suite 200, Brea, CA 92821, USA

### EUT Information

EUT Name: Wifi module  
Model: VB-Wifi-IN03  
Brand: ViewSonic  
Sample Received Date: February 06, 2025  
Sample Status: Normal  
Sample ID: 8262438  
Date of Tested: March 25, 2025 to April 3, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Daniel Zhang  
Project Engineer

Checked By:



Kebo Zhang  
Senior Project Engineer

Approved By:



Stephen Guo  
Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p>
---------------------------	--

### Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, Zhihui City Phase I, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

### Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

### Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Wifi module
Model	VB-Wifi-IN03

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDM(1024-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n: Up to MCS7 IEEE 802.11ax: Up to MCS7
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40/ax HE20/ax HE40
Normal Test Voltage:	DC 3.3V

### 5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	14.90	18.96
g	2412 ~ 2462	1-11[11]	13.83	17.89
n HT20	2412 ~ 2462	1-11[11]	12.95	17.01
n HT40	2422 ~ 2452	3-9[7]	14.63	18.69
ax HE20	2412 ~ 2462	1-11[11]	12.90	16.96
ax HE40	2422 ~ 2452	3-9[7]	13.43	17.49

## 5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
ax HE40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		AIC8800					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	15	15	15	/		
802.11g	1	15	15	13			
802.11n HT20	1	13	13	12	/		
802.11n HT40	1	/			15	15	13
802.11ax HE20	1	13	13	12	/		
802.11ax HE40	1	/			14	13	13

## WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20 mode: MCS0  
802.11n HT40 mode: MCS0  
802.11ax HE20 mode: MCS0  
802.11ax HE40 mode: MCS0

802.11b/g/n HT20/HT40/ax HE20/HE40 only support SISO mode.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	Coaxial antenna	4.06

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
<b>Note:</b> 1.BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)		

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/
2	Adapter	Frecom	F24L9-120200SPKU	Input: 100-240V~50/60Hz 0.6A Output: 12V/2A 24W

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

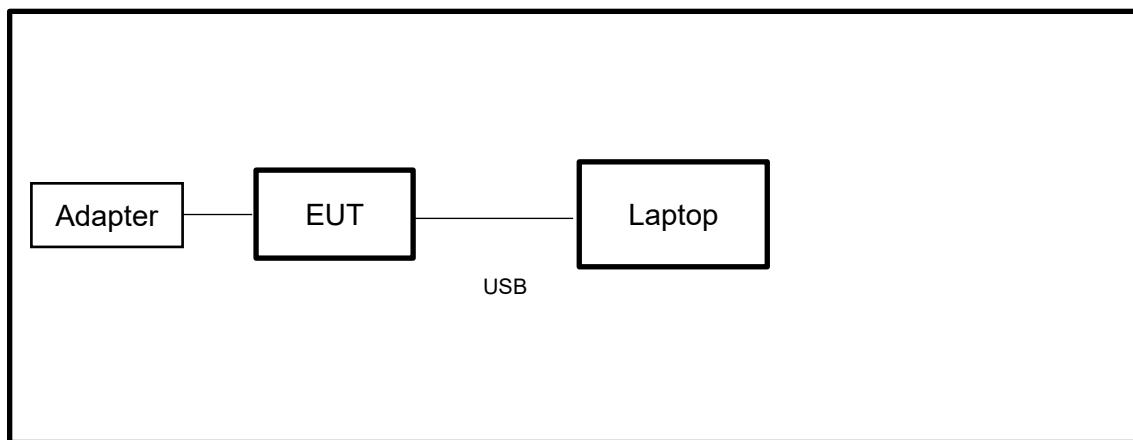

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonsend	JS0806-2	23B80620666	Dec.27,2024	Dec.26,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP

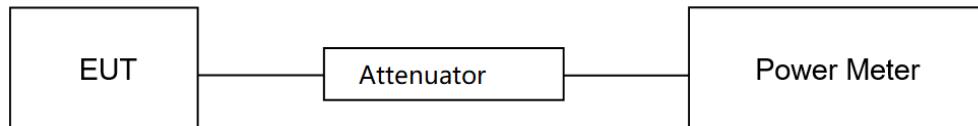

#### TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

#### TEST DATE / ENGINEER

Test Date	March 25, 2025	Test By	Bairong Liu
-----------	----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
/	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5


### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

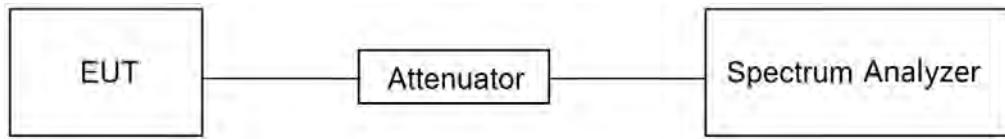**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	March 25, 2025	Test By	Bairong Liu
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x OBW bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

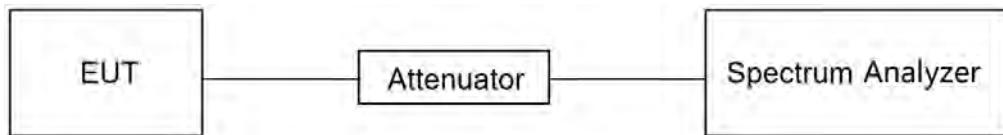

#### TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

#### TEST DATE / ENGINEER

Test Date	March 25, 2025	Test By	Bairong Liu
-----------	----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix D

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

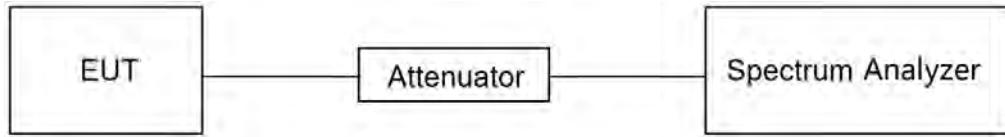**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	March 25, 2025	Test By	Bairong Liu
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E&F

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP

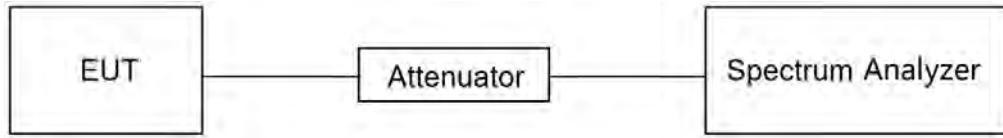

### TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

### TEST DATE / ENGINEER

Test Date	March 25, 2025	Test By	Bairong Liu
-----------	----------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix G

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency  $X$  kHz resulted in a level of  $Y$  dB<sub>V</sub>/m, which is equivalent to  $Y-51.5 = Z$  dB<sub>A</sub>/m, which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


## Above 1 GHz

### The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

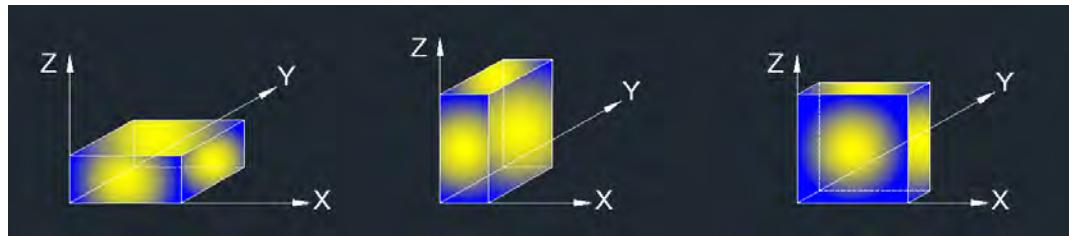

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


### **TEST SETUP**

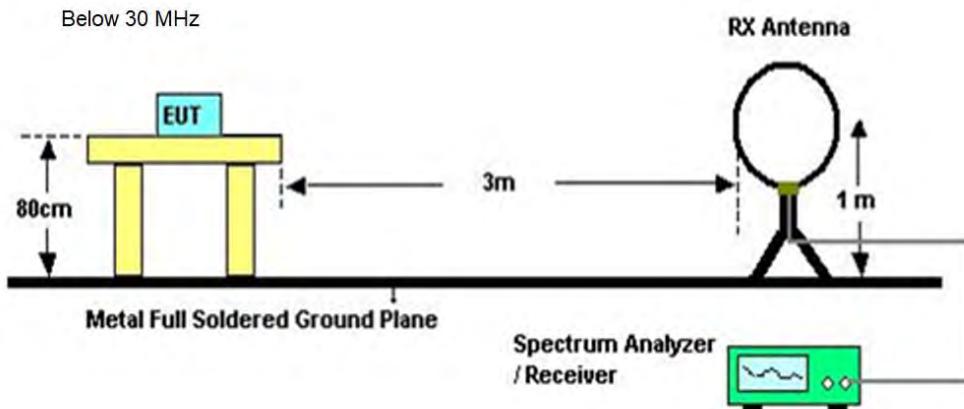

Below 1 GHz and above 30 MHz

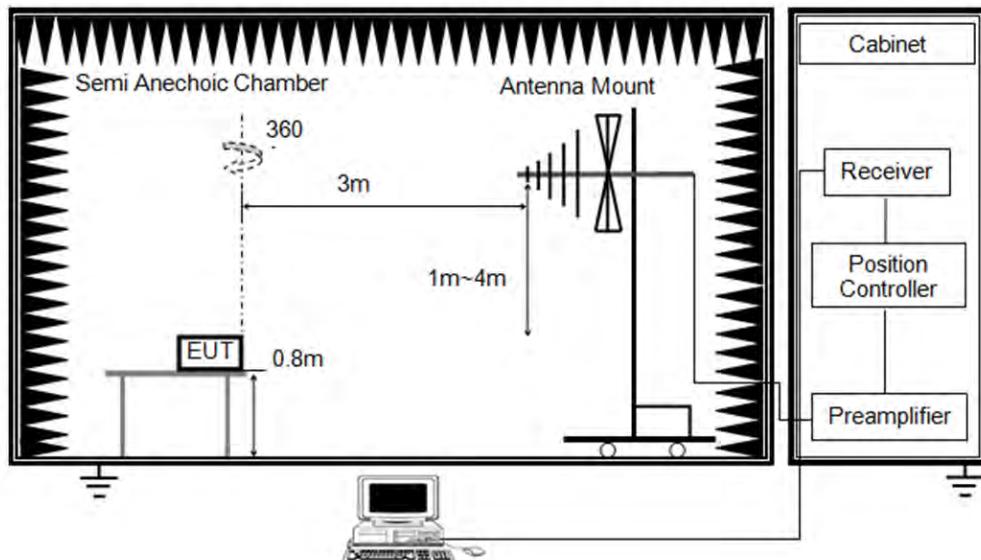

Above 1GHz

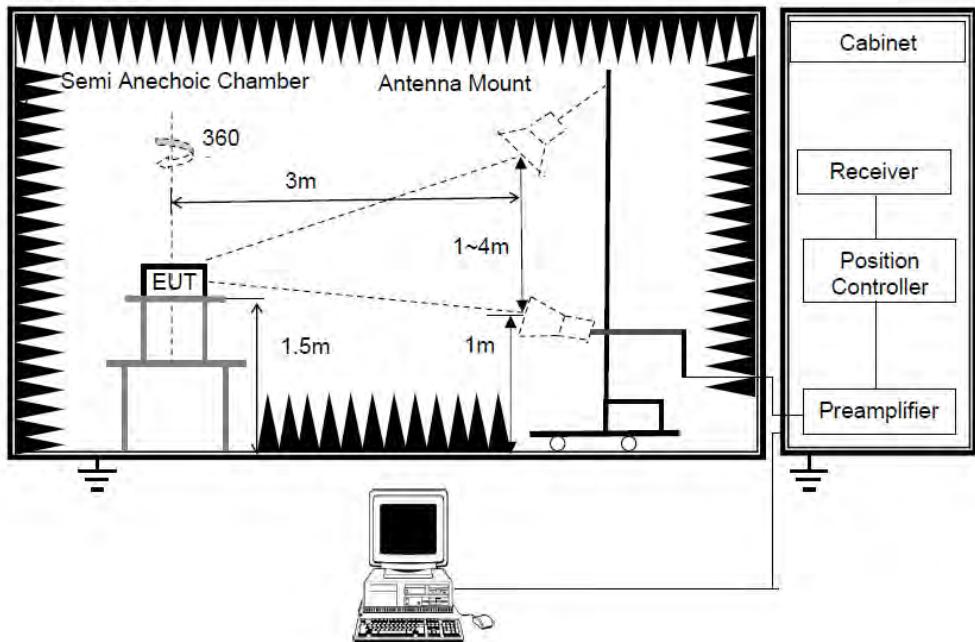

### TEST ENVIRONMENT

Temperature	20.3°C	Relative Humidity	56.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V


### TEST DATE / ENGINEER

Test Date	April 2, 2025	Test By	Mason Wang
-----------	---------------	---------	------------

### TEST RESULTS


## 8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

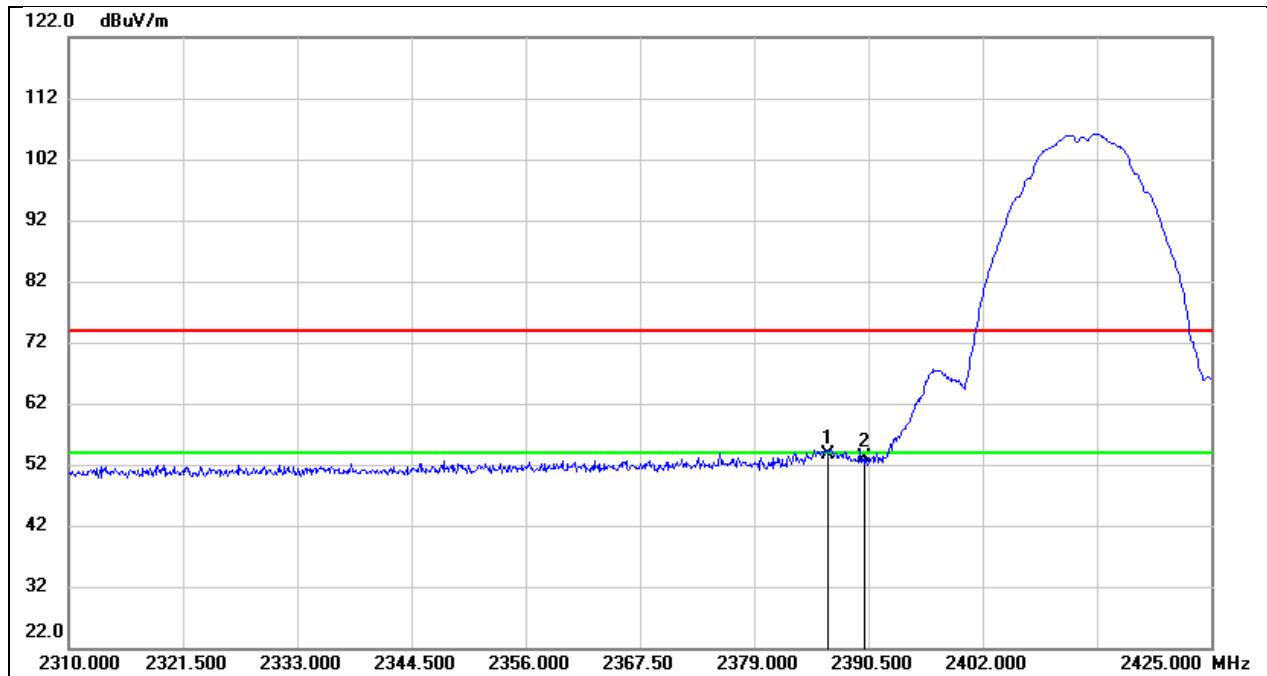


No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Correct (dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	2386.360	21.96	31.71	53.67	74.00	-20.33	peak
2	2390.000	21.49	31.73	53.22	74.00	-20.78	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

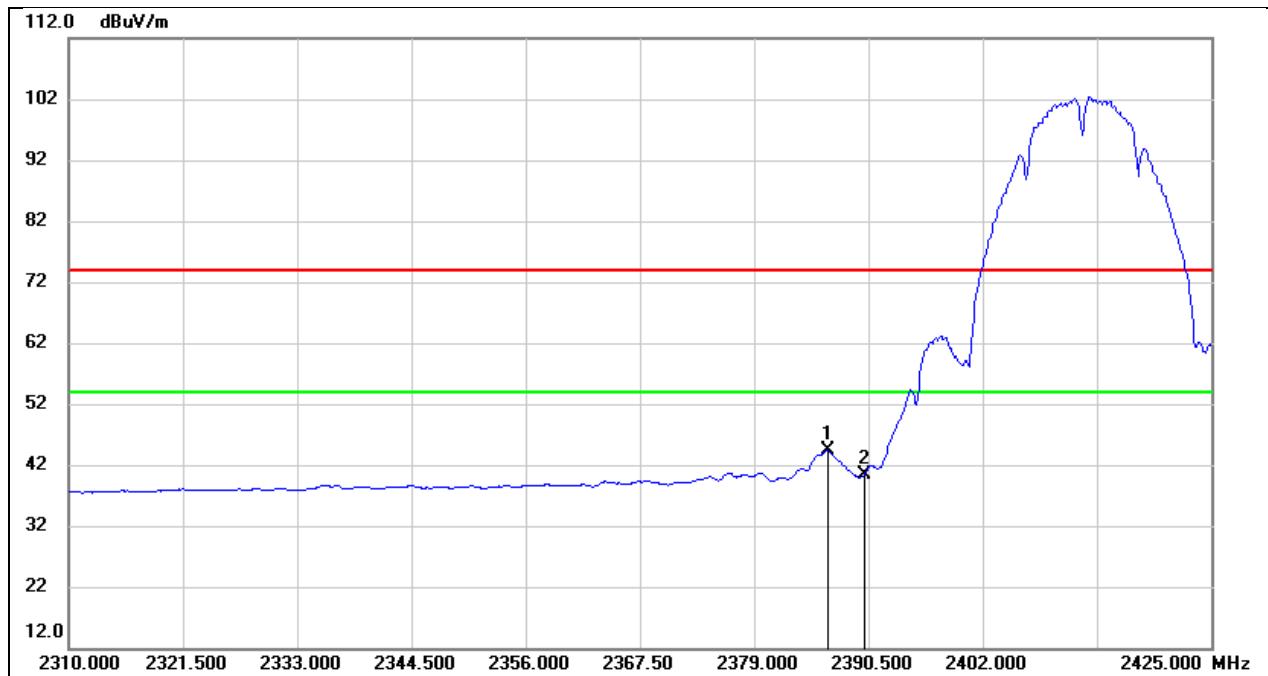


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.360	12.63	31.71	44.34	54.00	-9.66	AVG
2	2390.000	8.58	31.73	40.31	54.00	-13.69	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

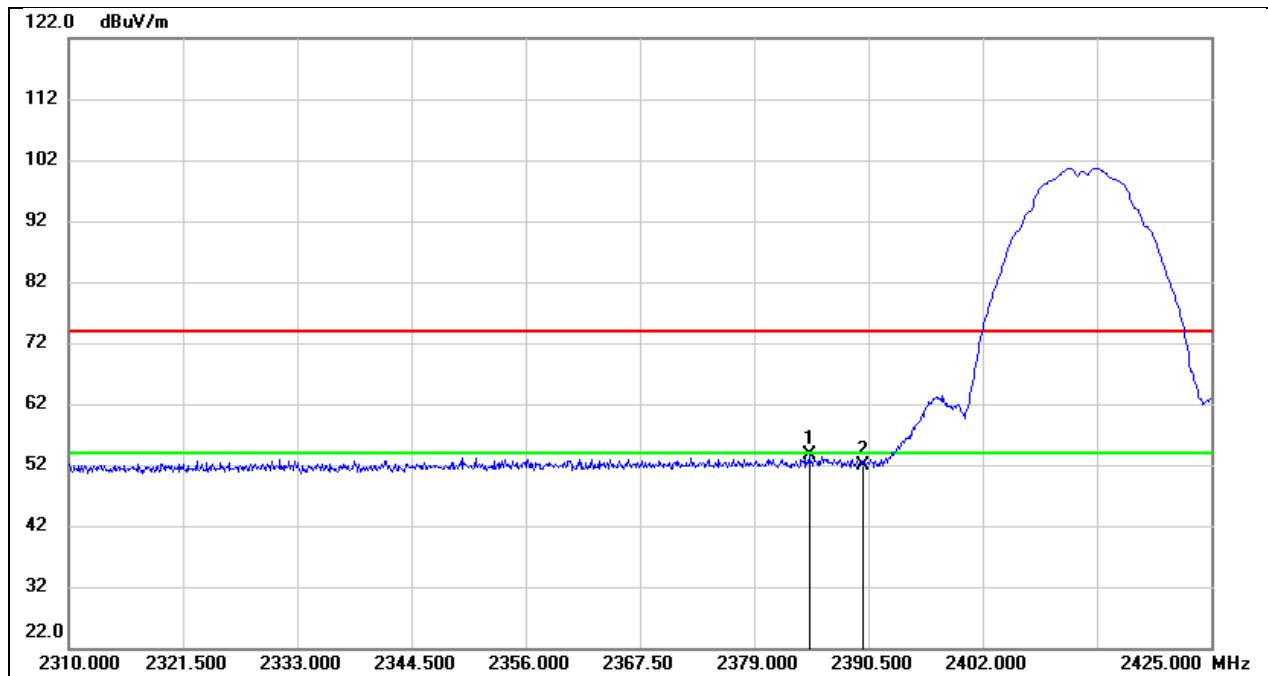


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.520	21.00	32.53	53.53	74.00	-20.47	peak
2	2390.000	19.31	32.55	51.86	74.00	-22.14	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

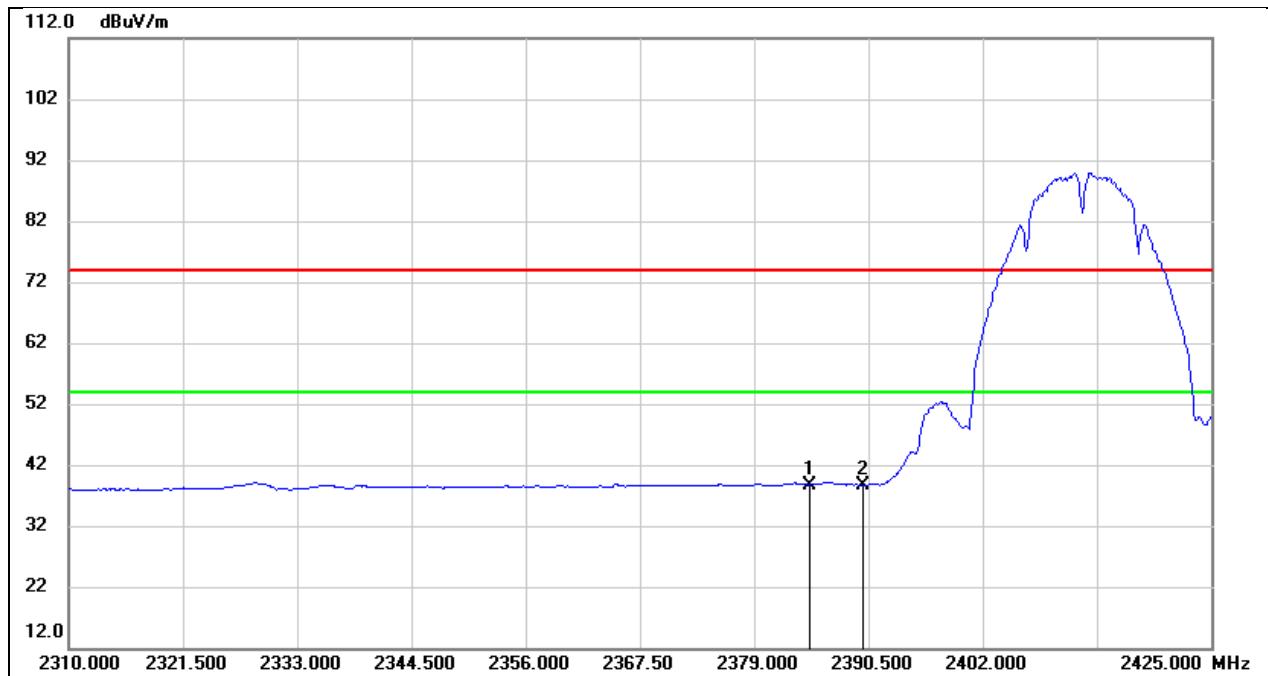


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.520	6.20	32.53	38.73	54.00	-15.27	AVG
2	2390.000	6.17	32.55	38.72	54.00	-15.28	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

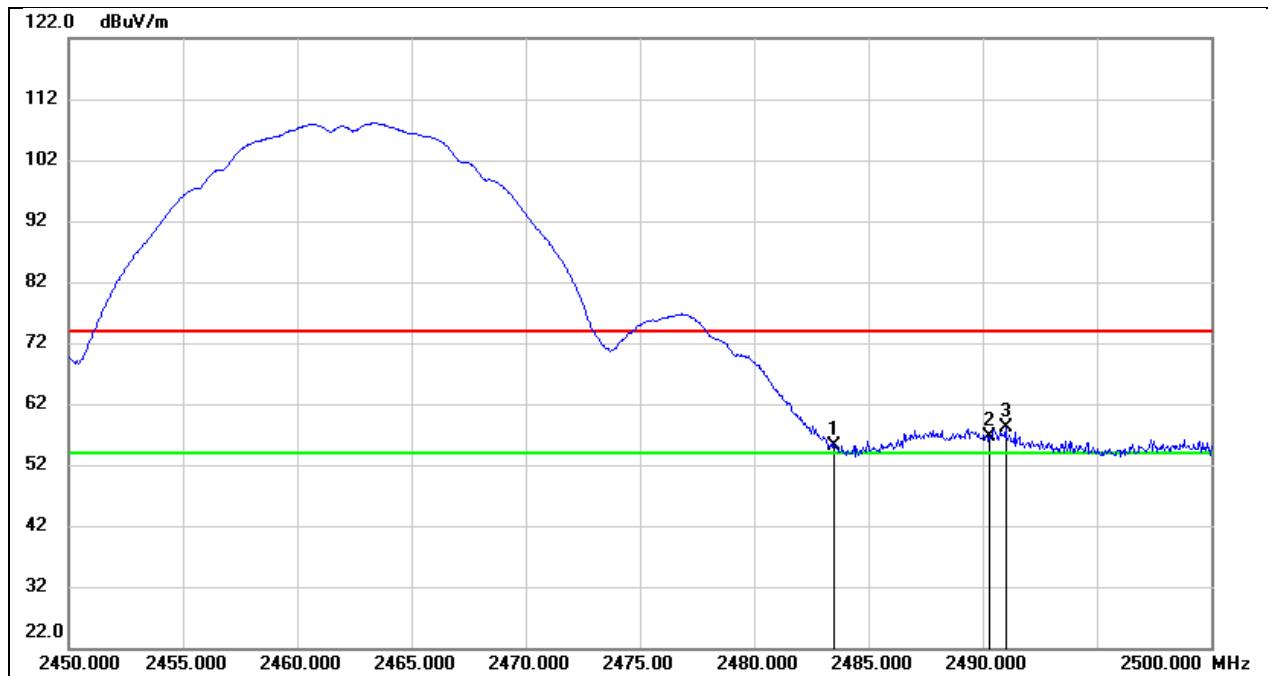


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.09	32.00	55.09	74.00	-18.91	peak
2	2490.300	24.71	32.01	56.72	74.00	-17.28	peak
3	2491.000	26.11	32.01	58.12	74.00	-15.88	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

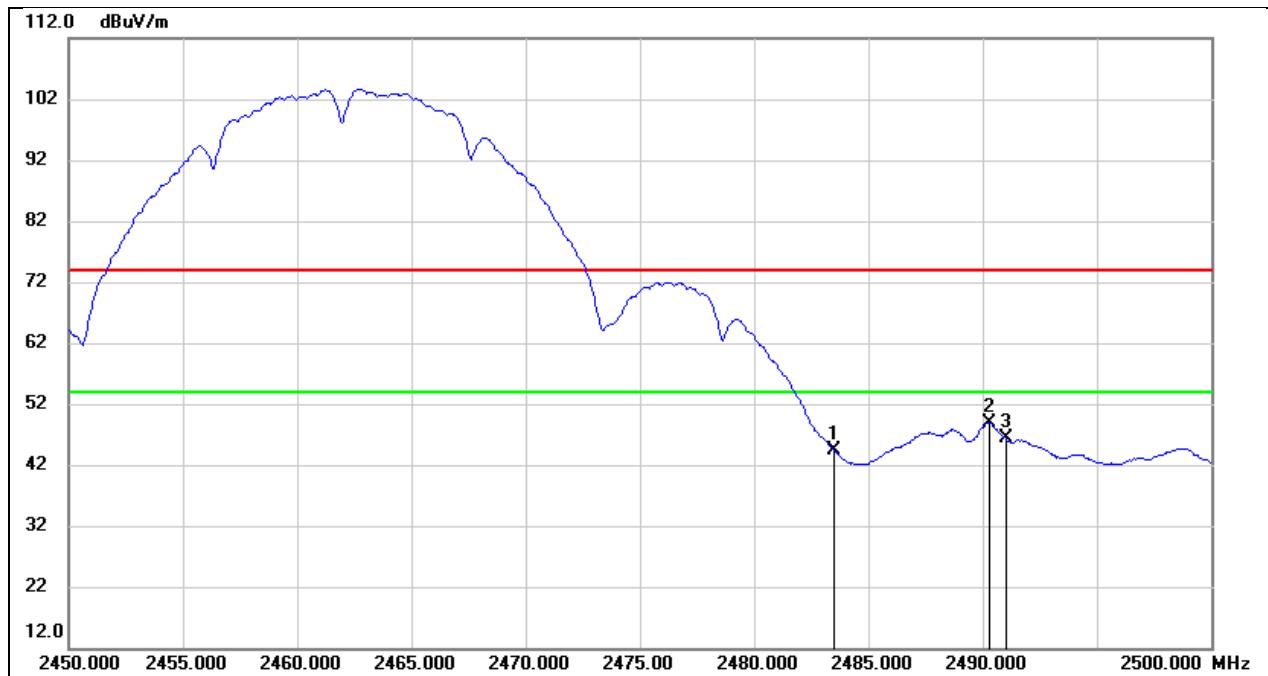


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.41	32.00	44.41	54.00	-9.59	AVG
2	2490.300	16.97	32.01	48.98	54.00	-5.02	AVG
3	2491.000	14.45	32.01	46.46	54.00	-7.54	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

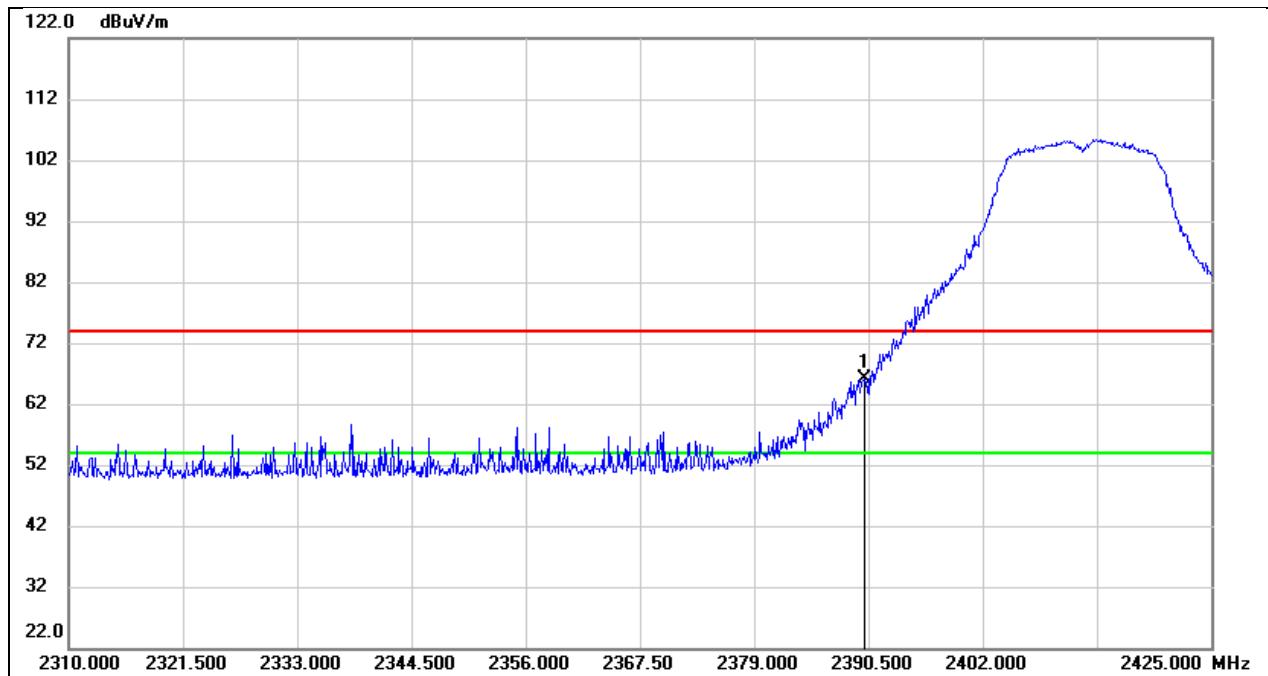


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	34.37	31.73	66.10	74.00	-7.90	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

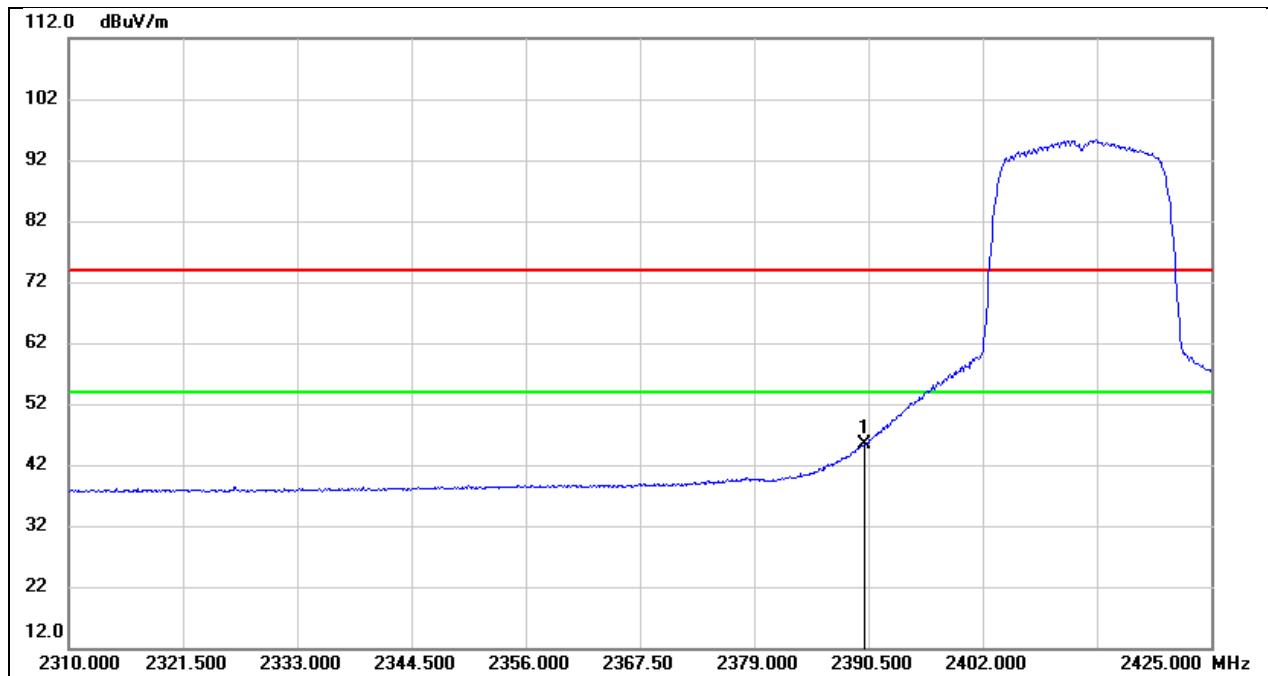


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.67	31.73	45.40	54.00	-8.60	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

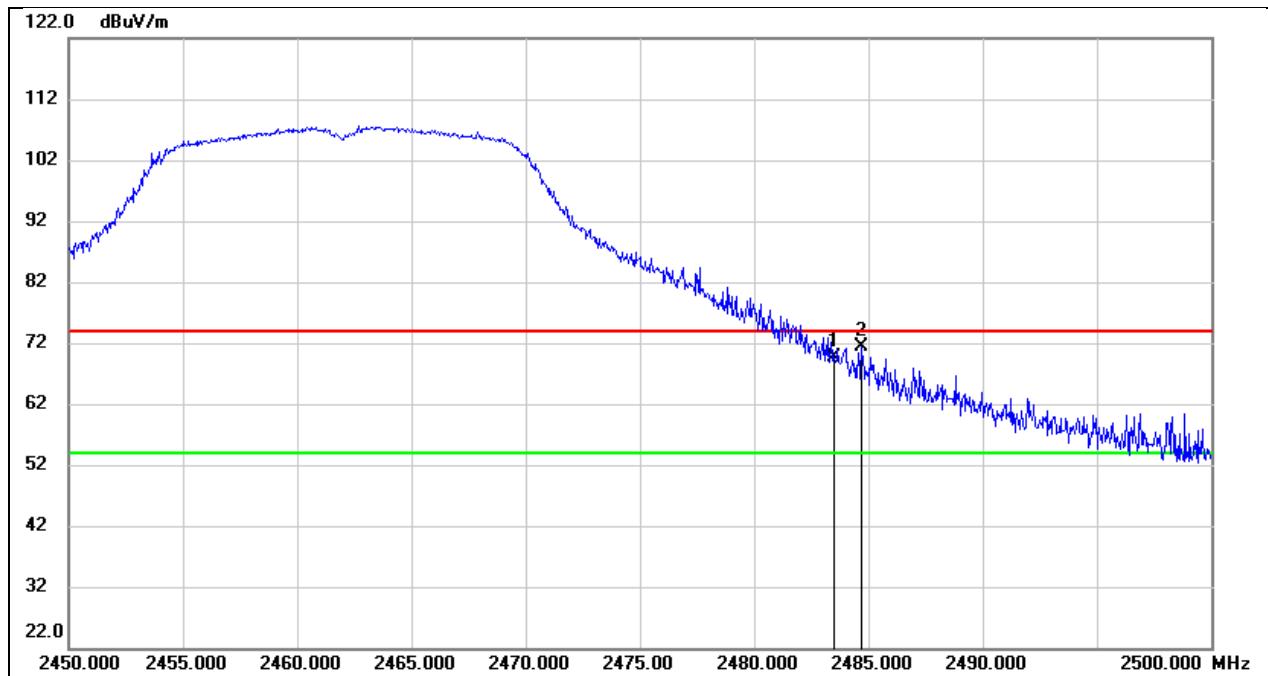


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.65	32.00	69.65	74.00	-4.35	peak
2	2484.700	39.36	32.00	71.36	74.00	-2.64	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

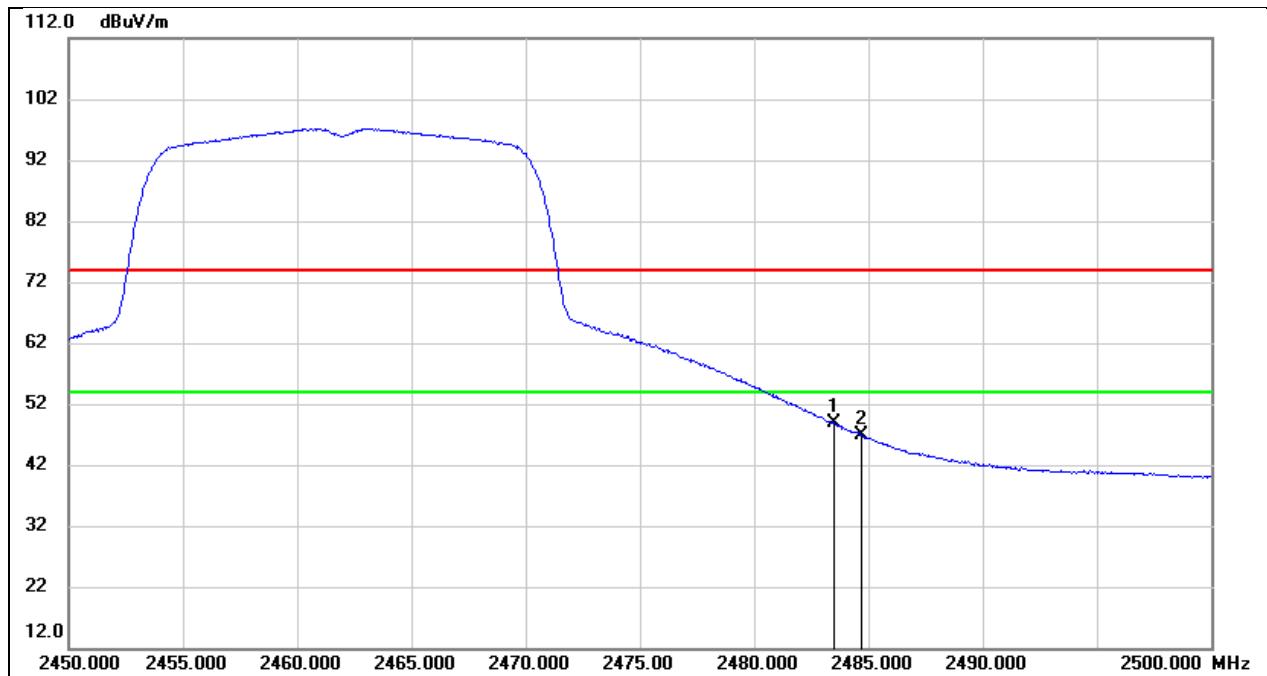


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.76	32.00	48.76	54.00	-5.24	AVG
2	2484.700	14.79	32.00	46.79	54.00	-7.21	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

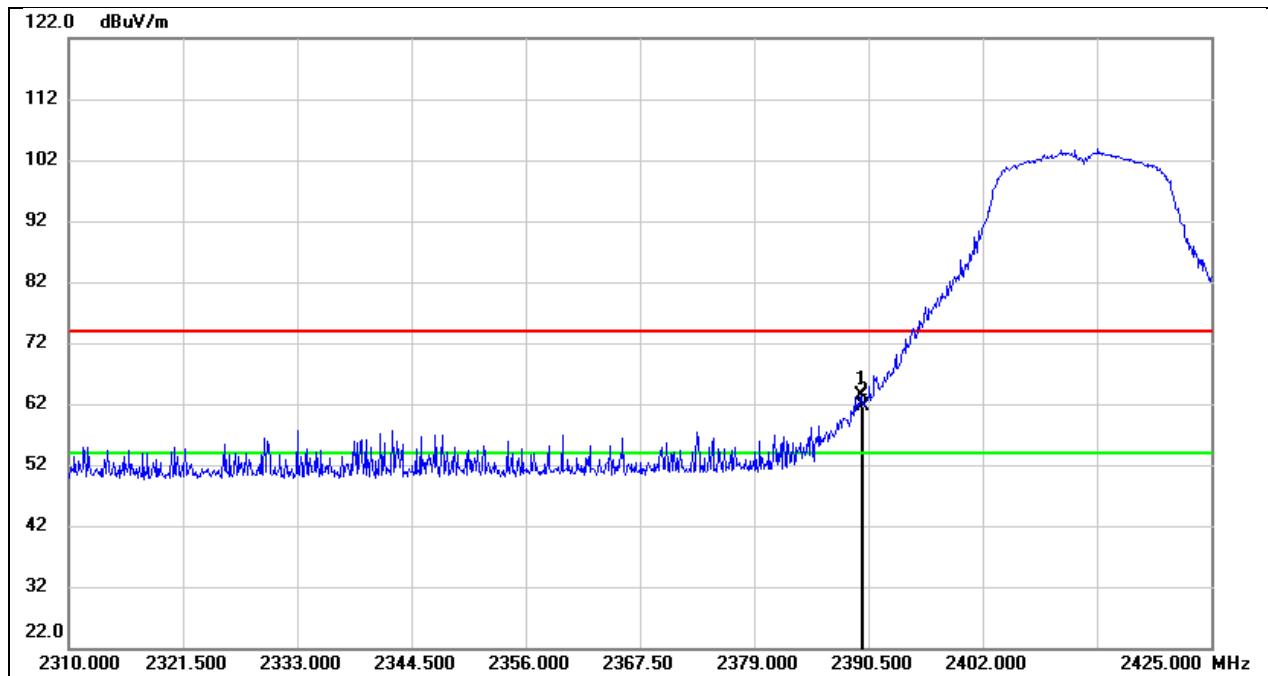


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.810	31.61	31.73	63.34	74.00	-10.66	peak
2	2390.000	30.00	31.73	61.73	74.00	-12.27	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

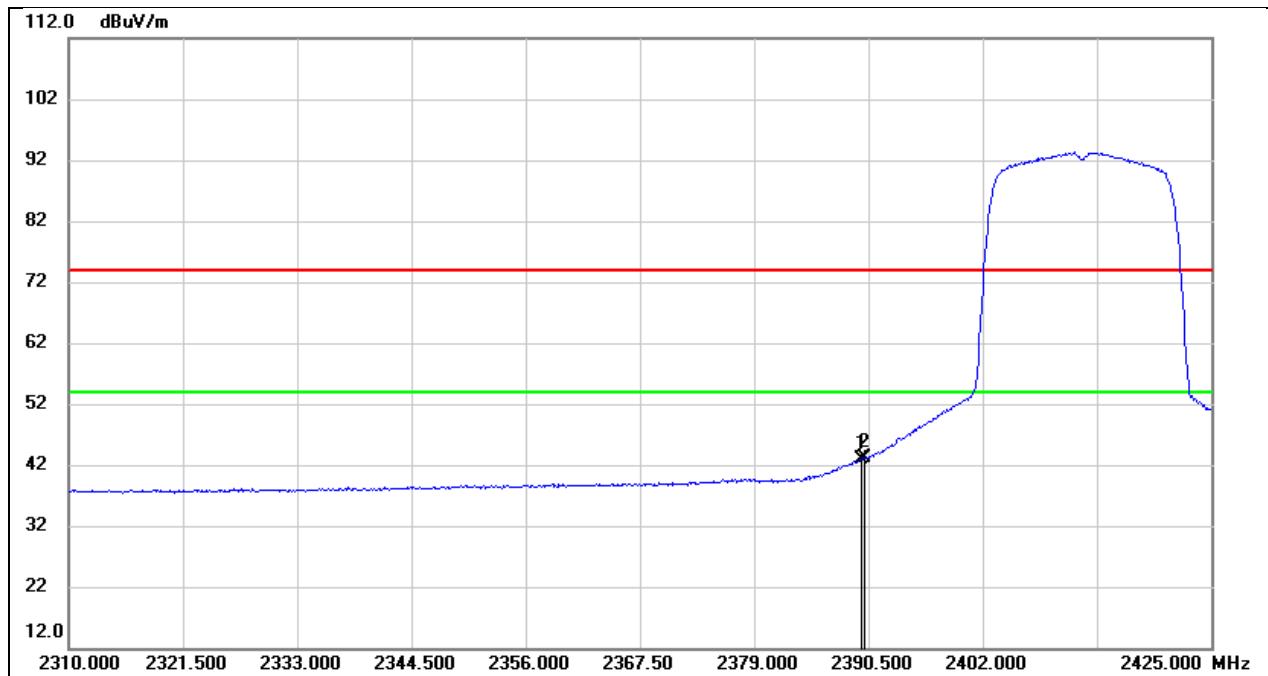


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.810	11.13	31.73	42.86	54.00	-11.14	AVG
2	2390.000	11.36	31.73	43.09	54.00	-10.91	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

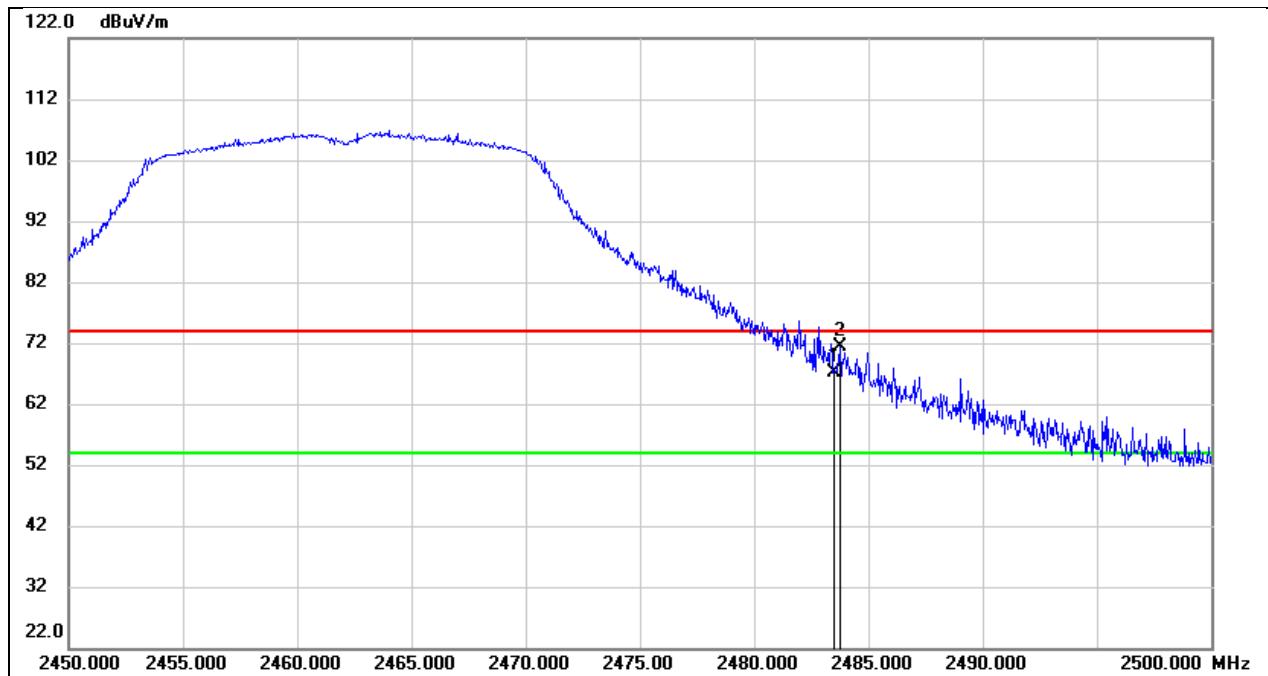


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.21	32.00	67.21	74.00	-6.79	peak
2	2483.750	39.46	32.00	71.46	74.00	-2.54	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

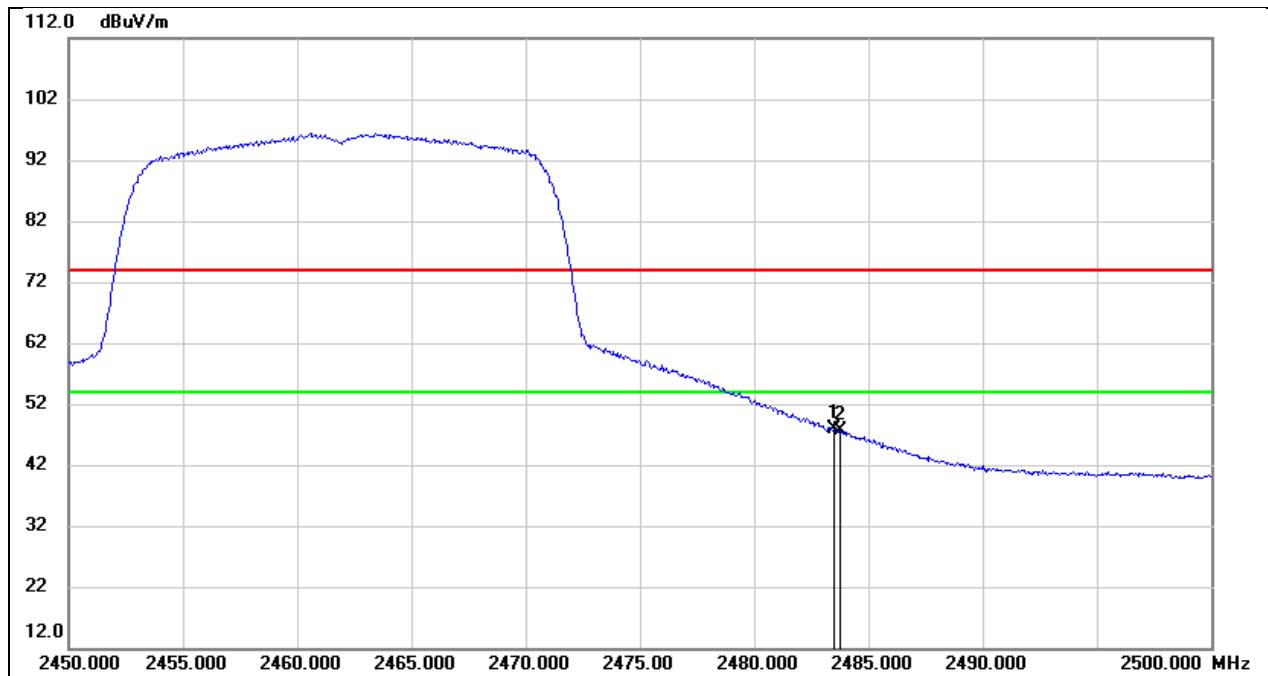


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.78	32.00	47.78	54.00	-6.22	AVG
2	2483.750	15.74	32.00	47.74	54.00	-6.26	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

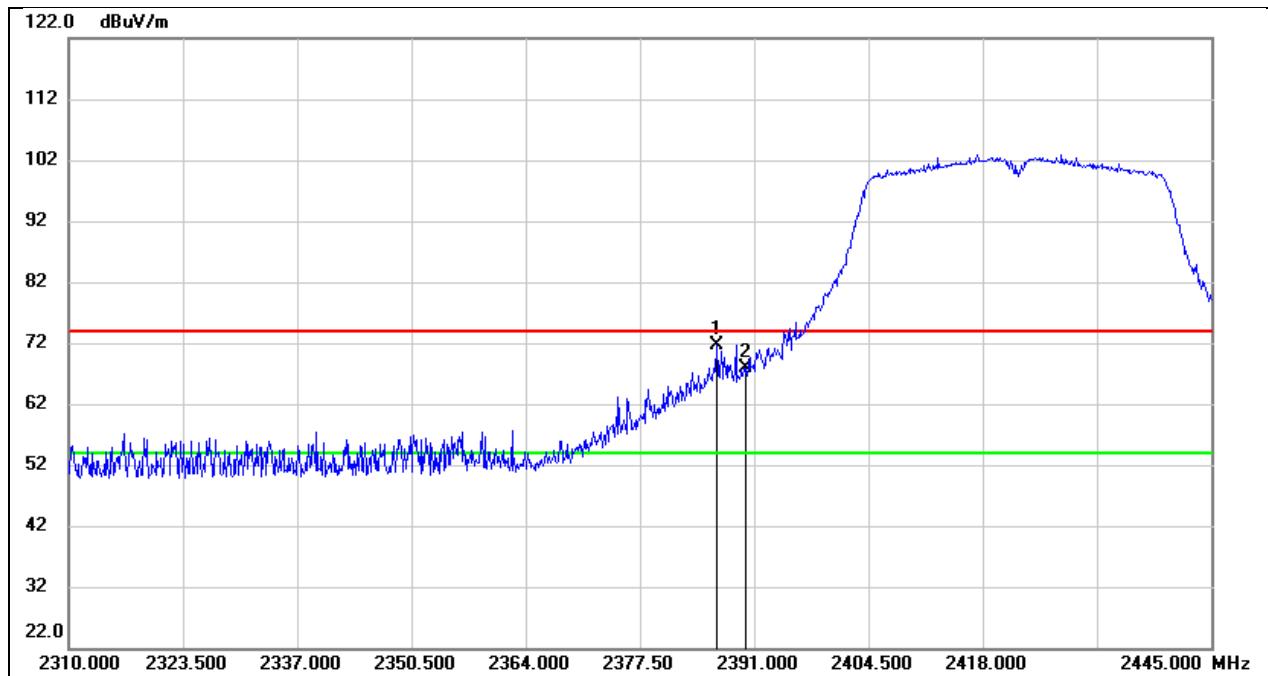


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.545	39.84	31.72	71.56	74.00	-2.44	peak
2	2390.000	36.16	31.73	67.89	74.00	-6.11	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

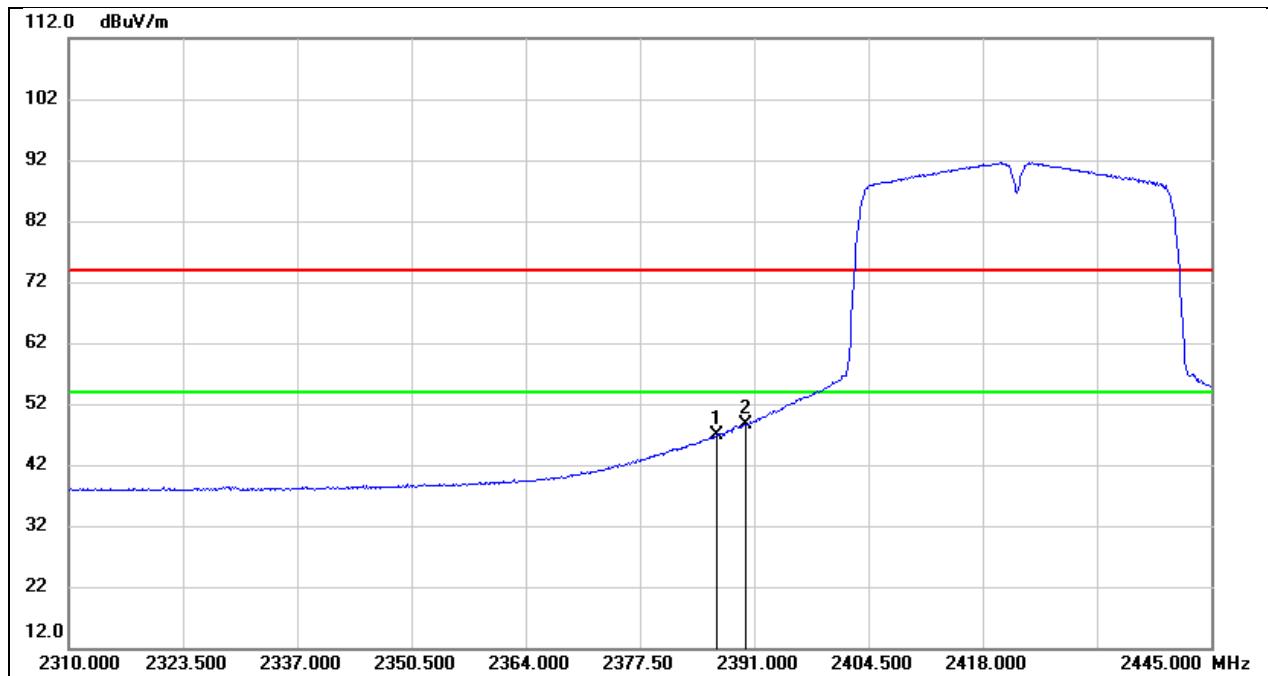


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.545	15.08	31.72	46.80	54.00	-7.20	AVG
2	2390.000	16.78	31.73	48.51	54.00	-5.49	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

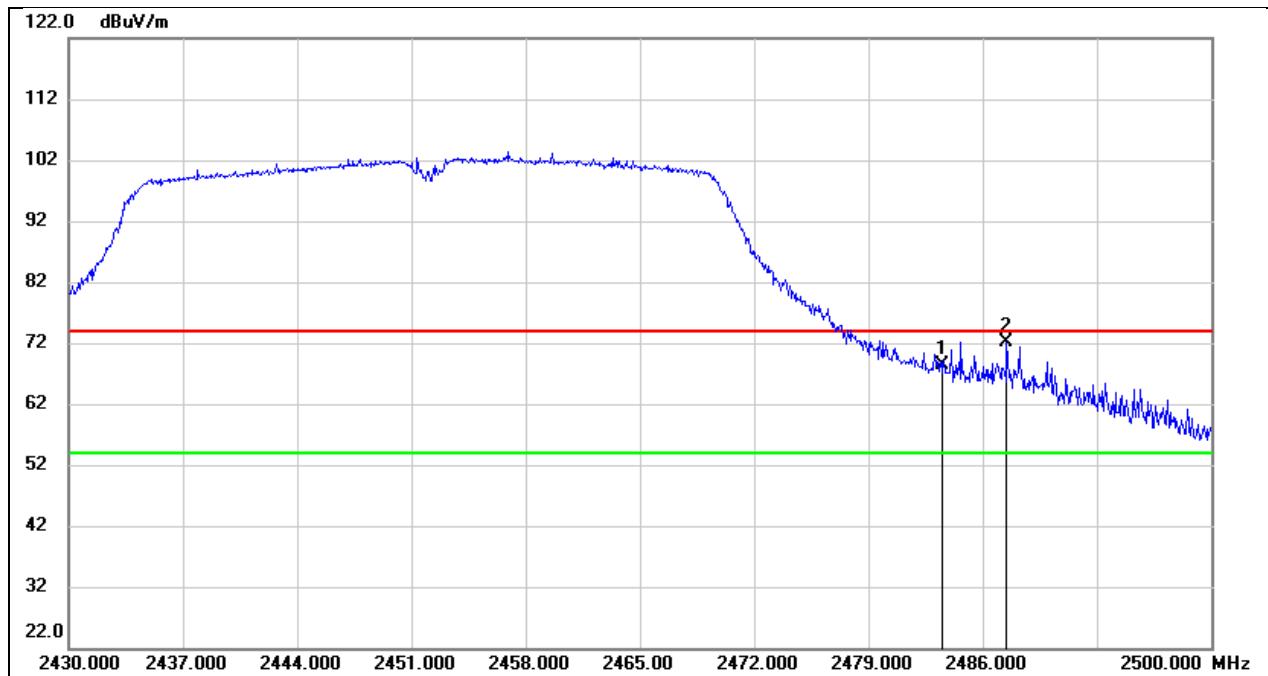


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.32	32.00	68.32	74.00	-5.68	peak
2	2487.470	40.24	32.00	72.24	74.00	-1.76	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

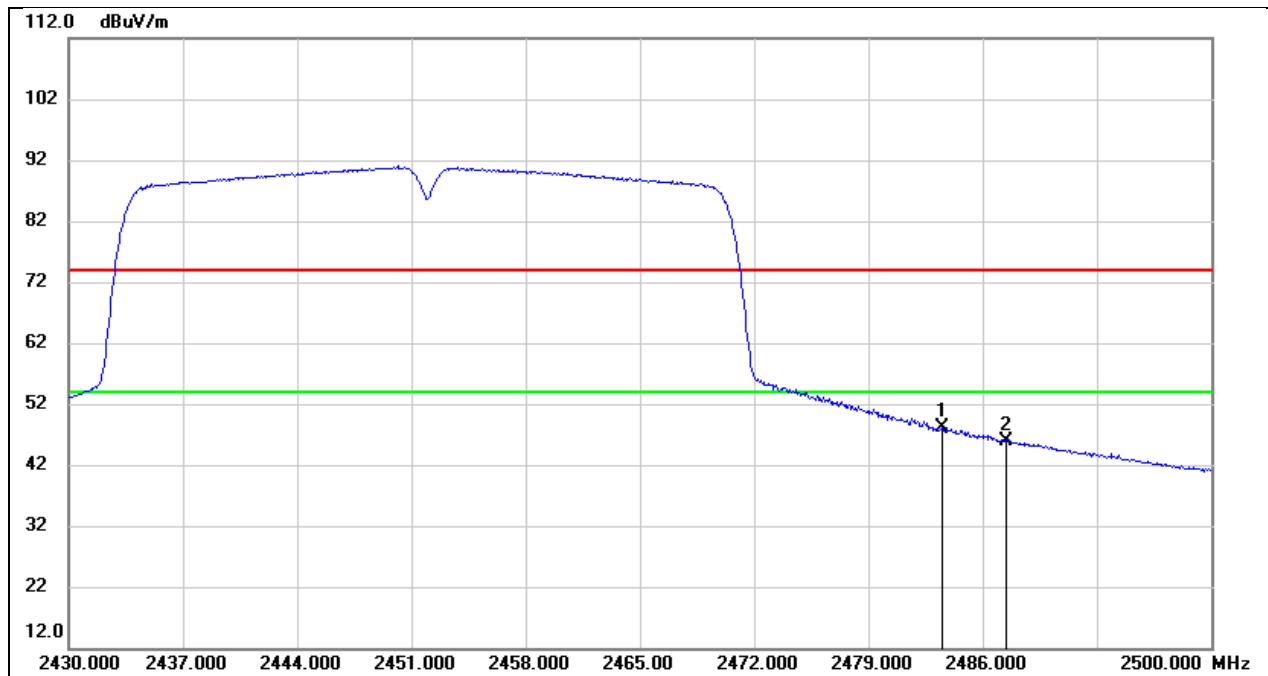


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.04	32.00	48.04	54.00	-5.96	AVG
2	2487.470	13.84	32.00	45.84	54.00	-8.16	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

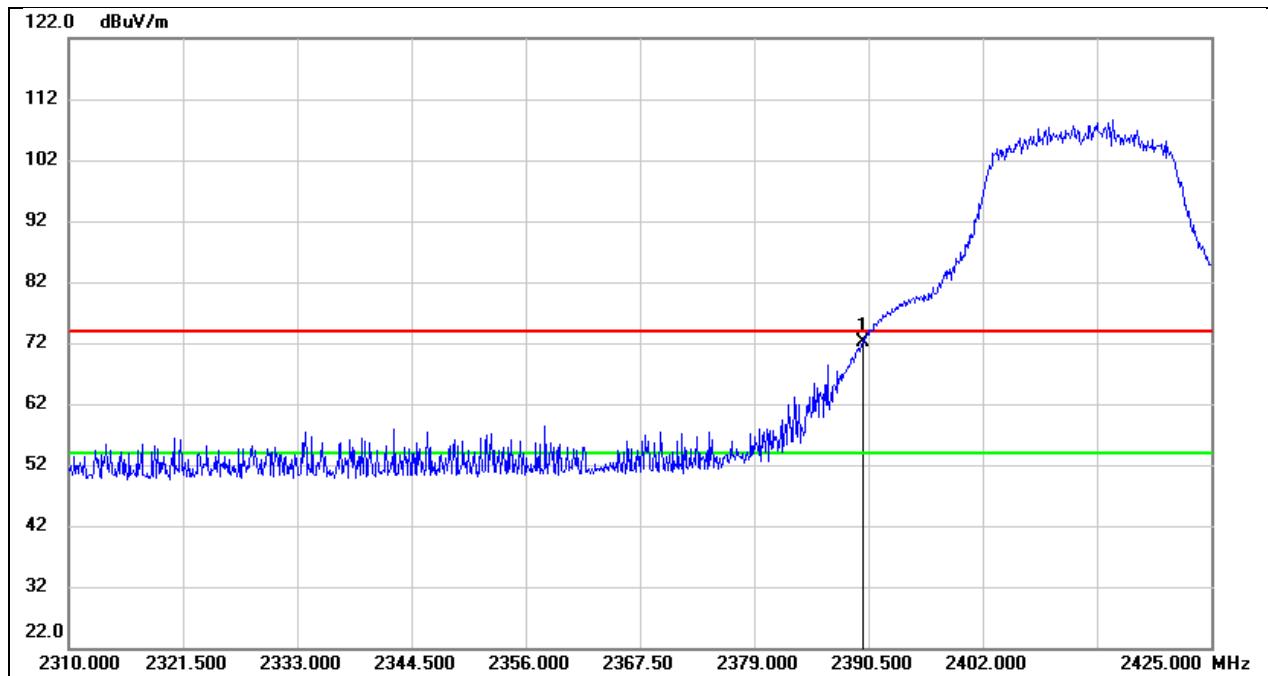


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	40.37	31.73	72.10	74.00	-1.90	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

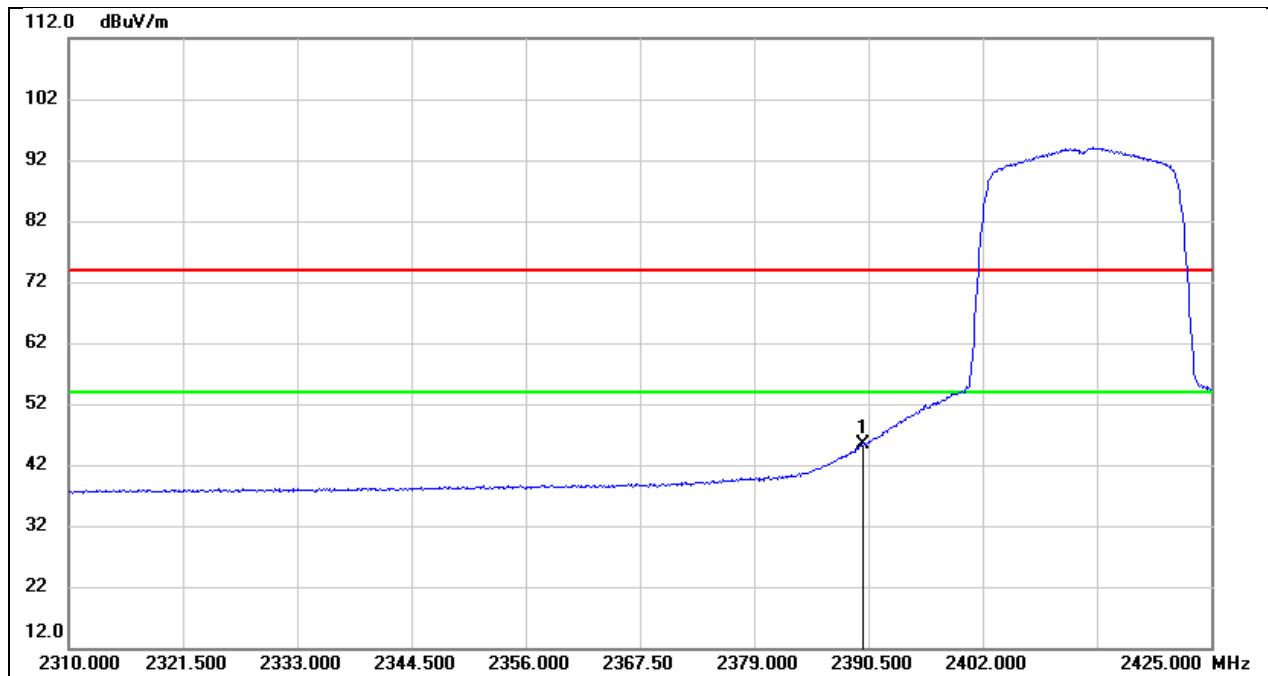


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.53	31.73	45.26	54.00	-8.74	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

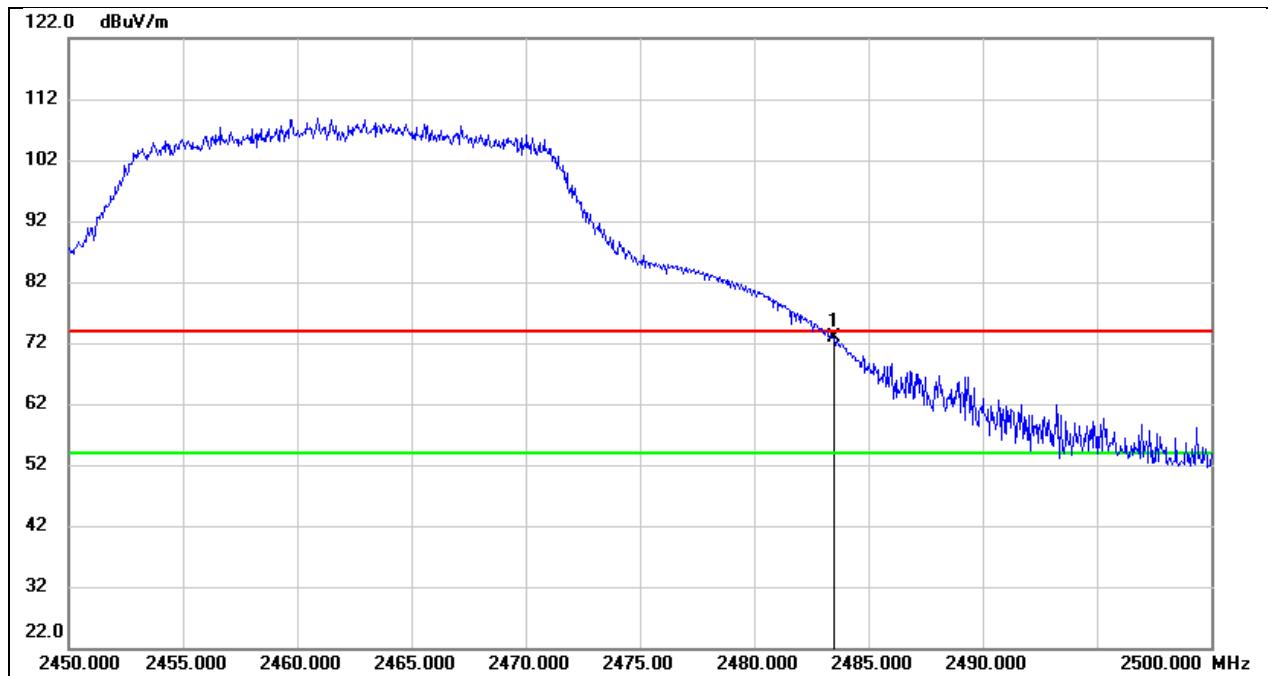


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.78	32.00	72.78	74.00	-1.22	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

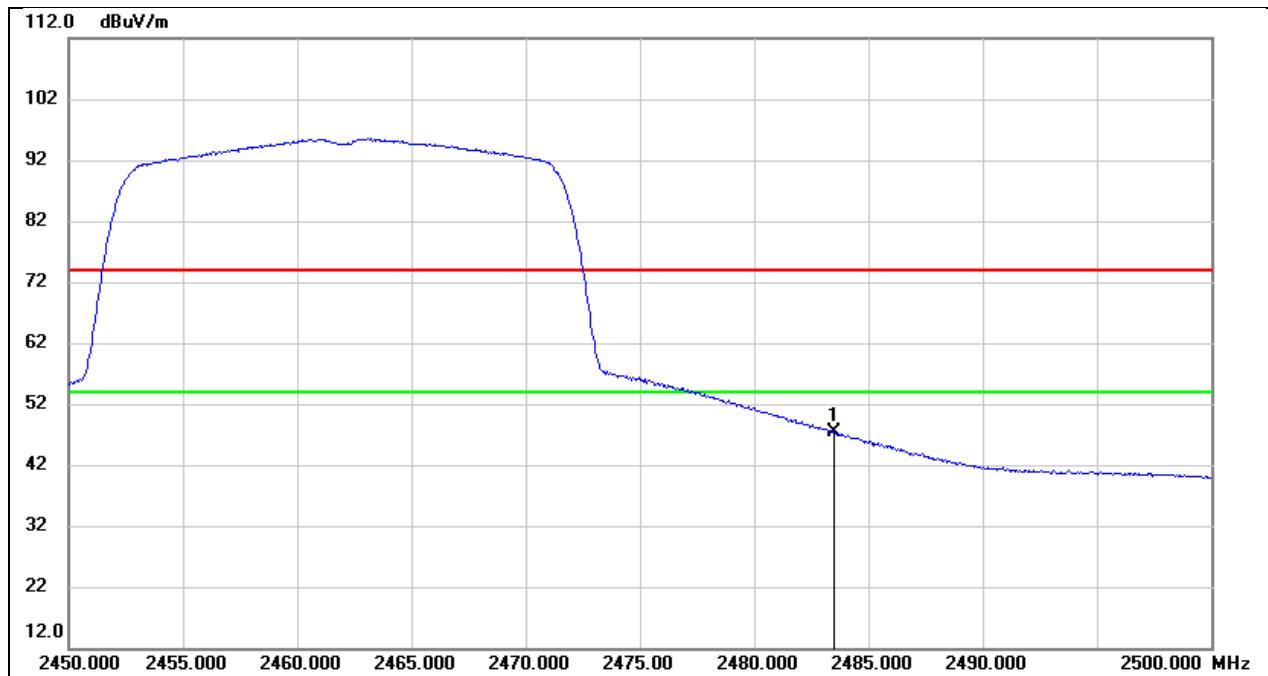


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.32	32.00	47.32	54.00	-6.68	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

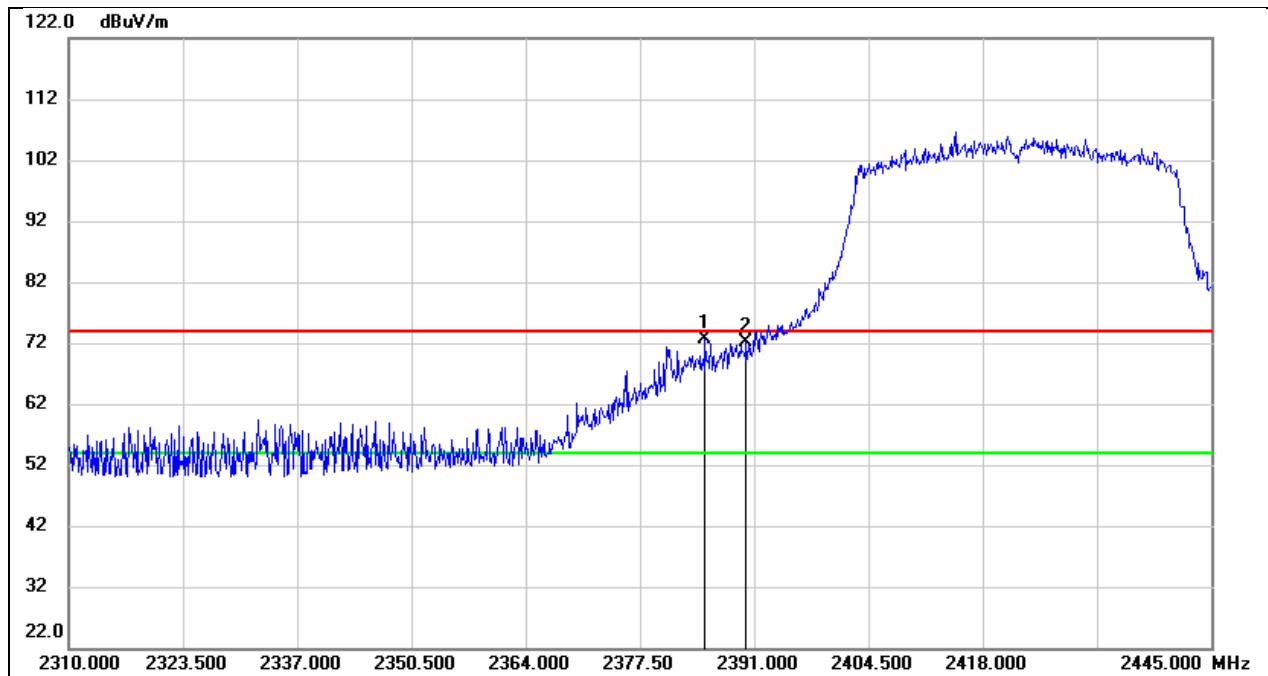


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.195	40.95	31.71	72.66	74.00	-1.34	peak
2	2390.000	40.33	31.73	72.06	74.00	-1.94	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

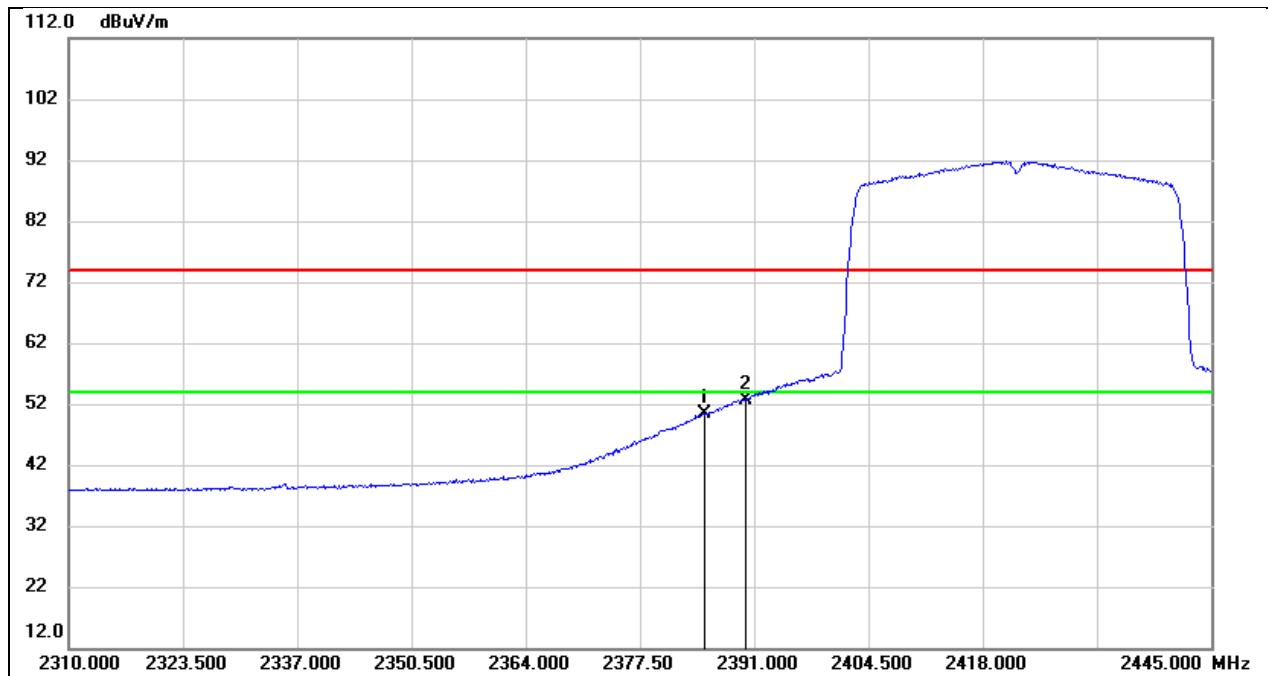


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.195	18.61	31.71	50.32	54.00	-3.68	AVG
2	2390.000	20.90	31.73	52.63	54.00	-1.37	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

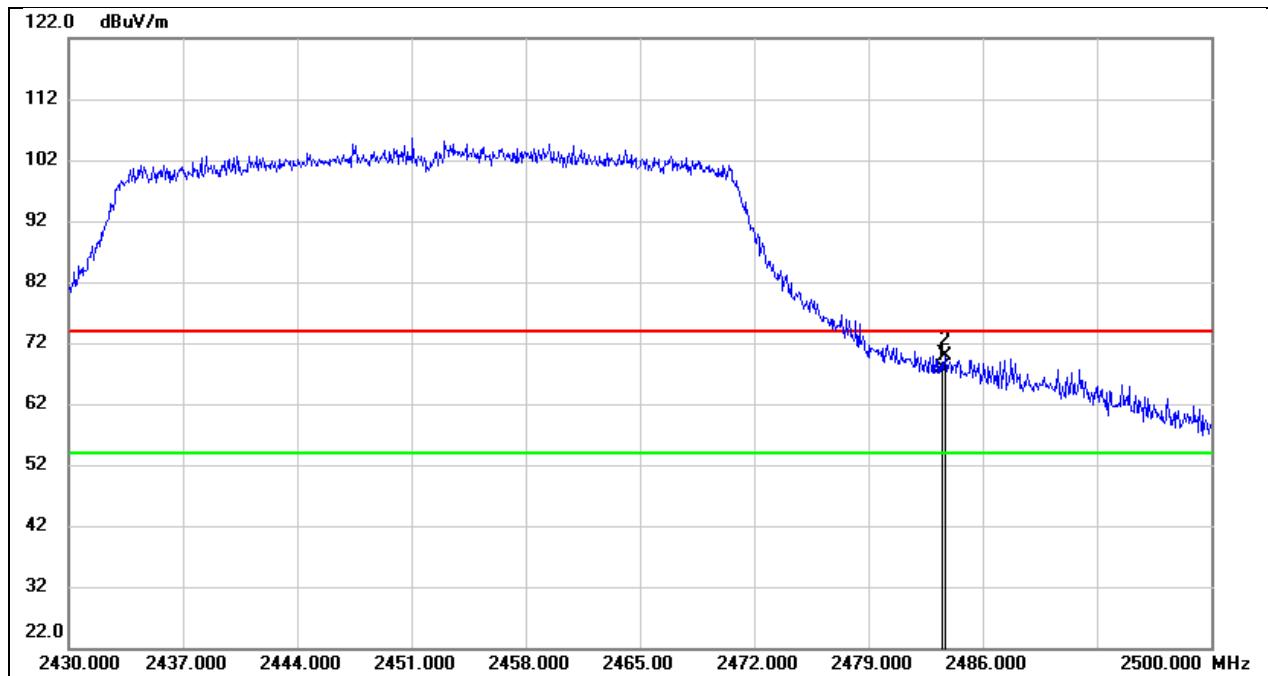

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.84	32.00	67.84	74.00	-6.16	peak
2	2483.690	37.81	32.00	69.81	74.00	-4.19	peak


Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

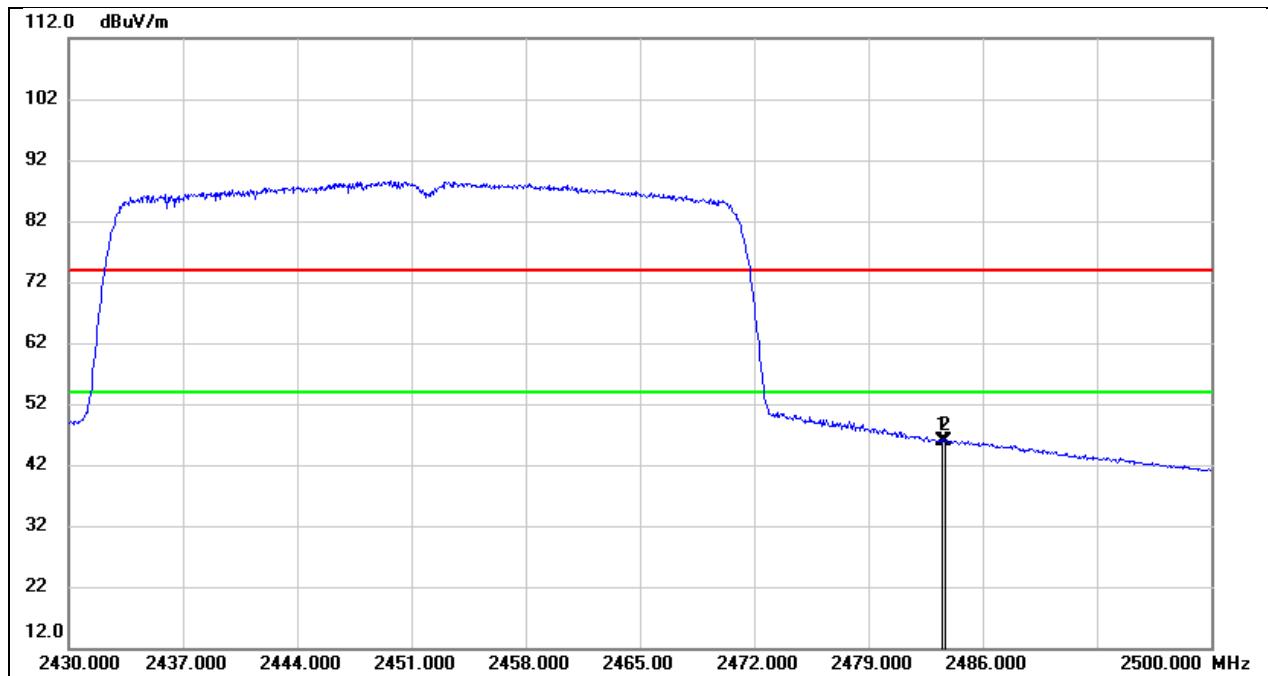

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.83	32.00	45.83	54.00	-8.17	AVG
2	2483.690	13.83	32.00	45.83	54.00	-8.17	AVG


## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

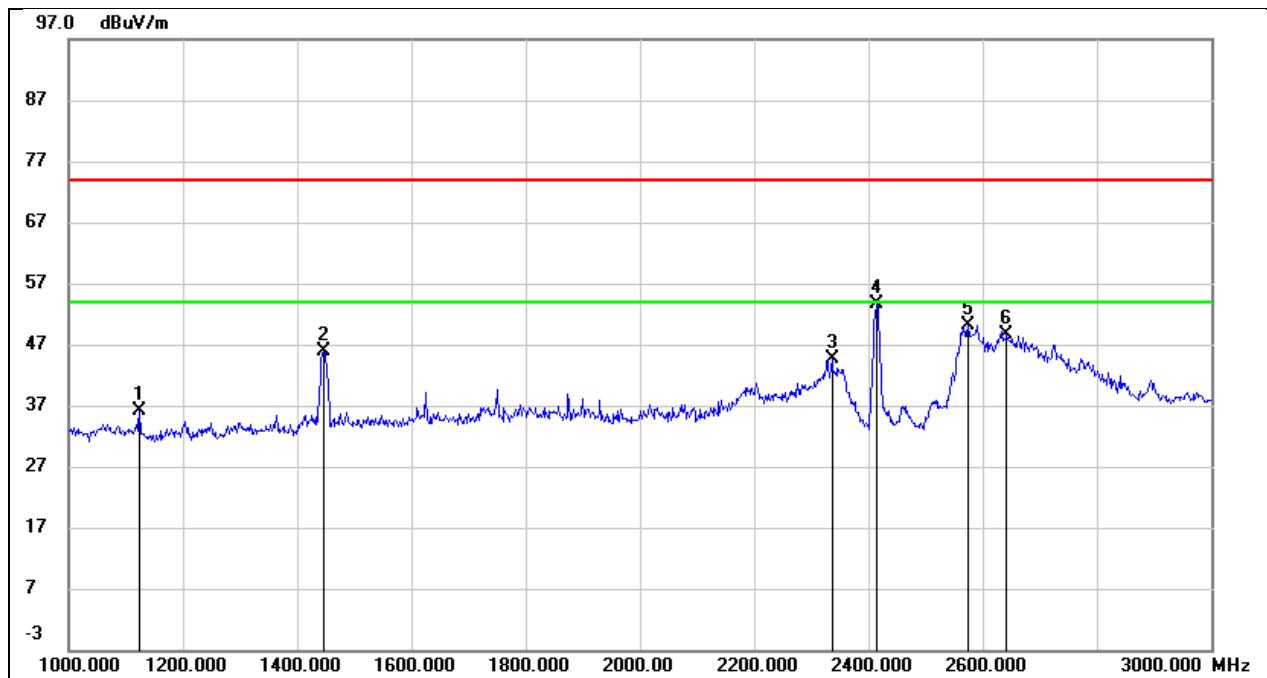


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	50.10	-13.85	36.25	74.00	-37.75	peak
2	1446.000	57.96	-12.19	45.77	74.00	-28.23	peak
3	2336.000	53.43	-8.83	44.60	74.00	-29.40	peak
4	2412.000	62.14	-8.53	53.61	/	/	Fundamental
5	2574.000	58.13	-7.88	50.25	74.00	-23.75	peak
6	2642.000	56.13	-7.58	48.55	74.00	-25.45	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

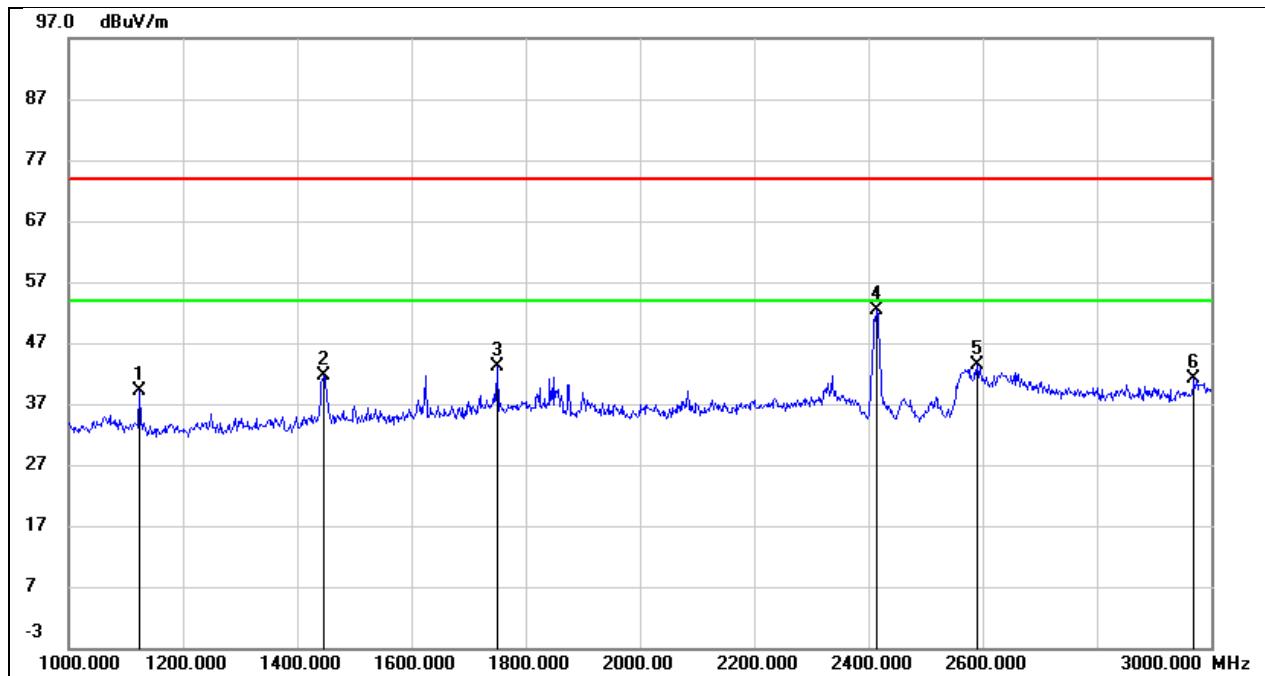


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	52.36	-13.30	39.06	74.00	-34.94	peak
2	1446.000	53.67	-12.03	41.64	74.00	-32.36	peak
3	1750.000	52.96	-9.82	43.14	74.00	-30.86	peak
4	2412.000	60.02	-7.71	52.31	/	/	Fundamental
5	2590.000	50.23	-6.92	43.31	74.00	-30.69	peak
6	2970.000	46.05	-4.88	41.17	74.00	-32.83	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

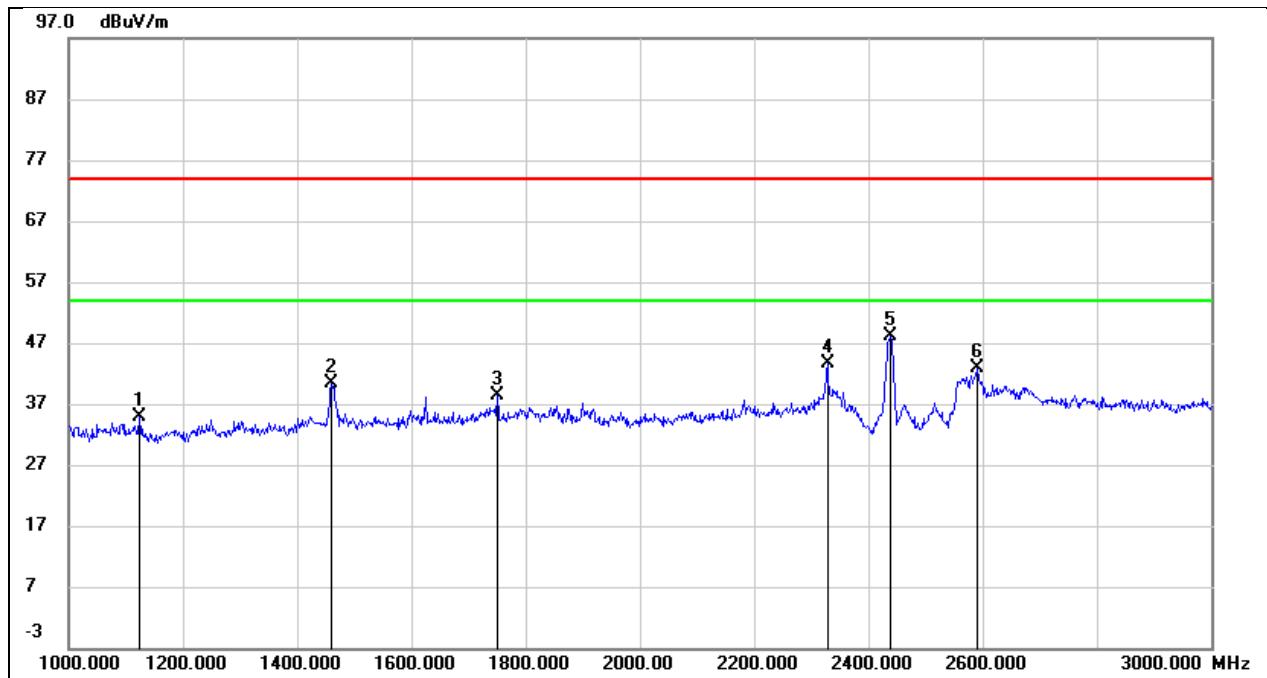


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	48.82	-13.85	34.97	74.00	-39.03	peak
2	1460.000	52.57	-12.11	40.46	74.00	-33.54	peak
3	1750.000	48.68	-10.32	38.36	74.00	-35.64	peak
4	2328.000	52.46	-8.85	43.61	74.00	-30.39	peak
5	2437.000	56.47	-8.44	48.03	/	/	Fundamental
6	2590.000	50.62	-7.81	42.81	74.00	-31.19	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

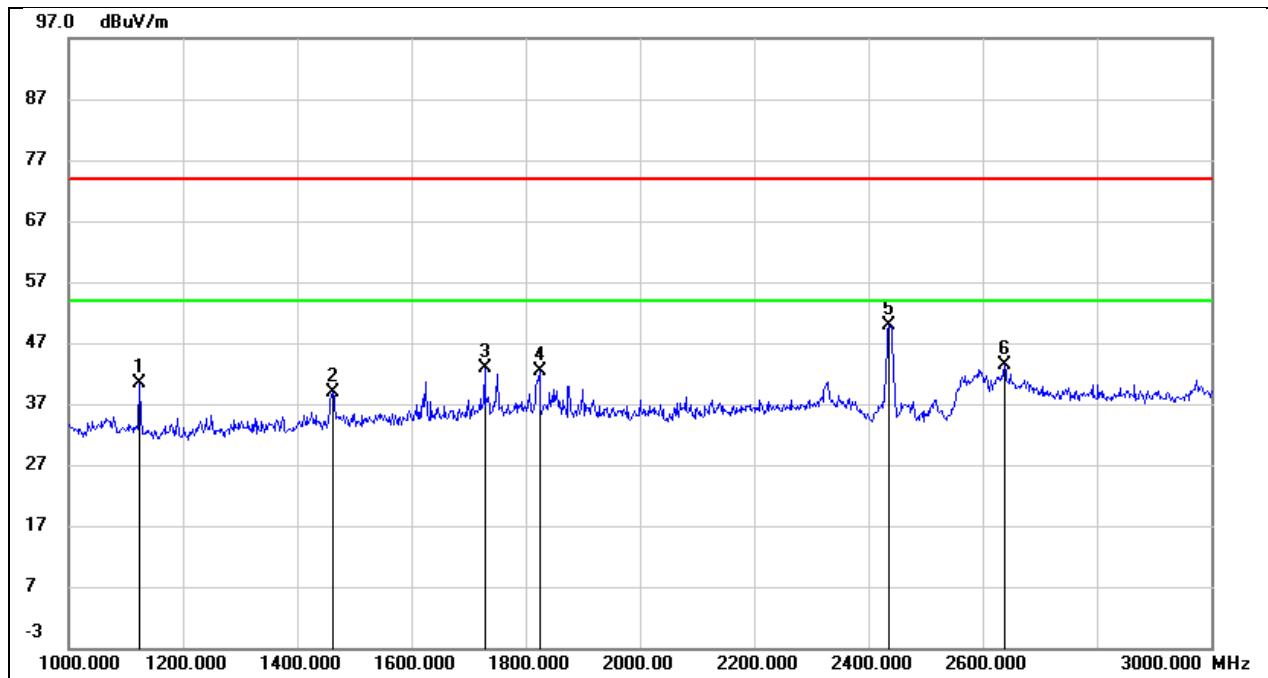


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	54.23	-13.85	40.38	74.00	-33.62	peak
2	1462.000	50.97	-12.10	38.87	74.00	-35.13	peak
3	1728.000	53.31	-10.47	42.84	74.00	-31.16	peak
4	1824.000	52.33	-9.98	42.35	74.00	-31.65	peak
5	2437.000	58.27	-8.46	49.81	/	/	Fundamental
6	2638.000	51.04	-7.60	43.44	74.00	-30.56	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

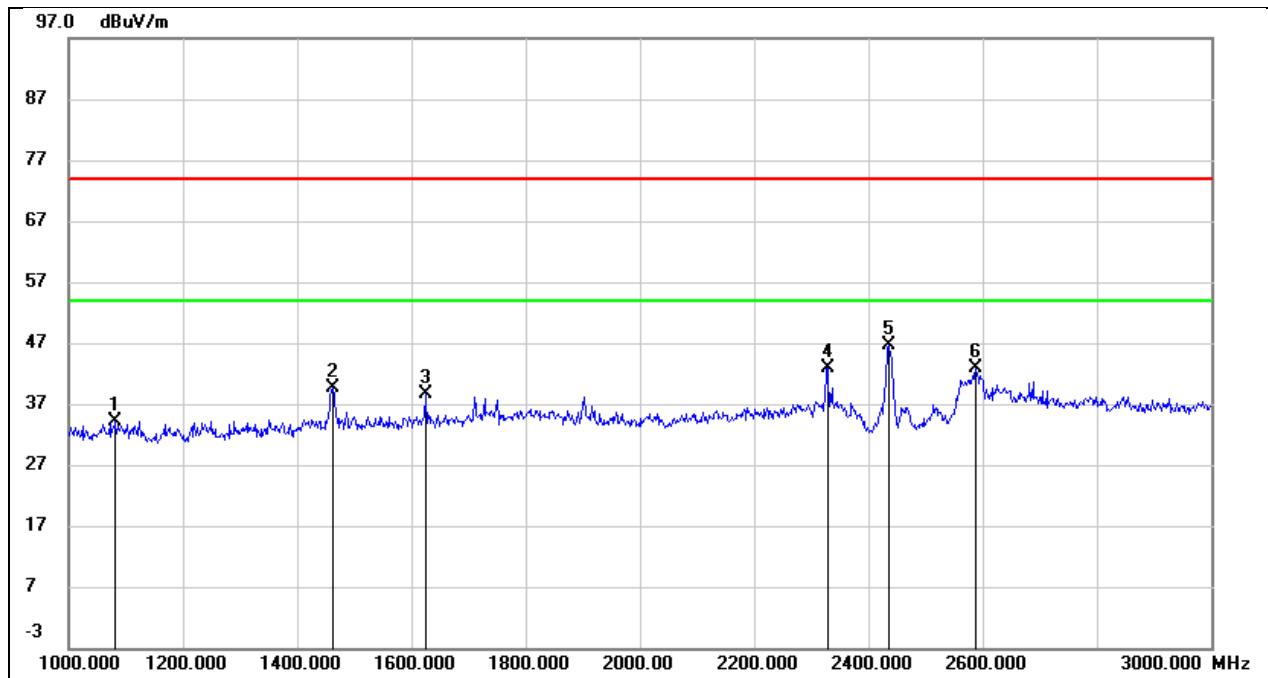

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1082.000	48.26	-14.03	34.23	74.00	-39.77	peak
2	1462.000	51.85	-12.10	39.75	74.00	-34.25	peak
3	1624.000	49.80	-11.22	38.58	74.00	-35.42	peak
4	2328.000	51.83	-8.85	42.98	74.00	-31.02	peak
5	2436.000	55.07	-8.46	46.61	74.00	-27.39	peak
6	2588.000	50.66	-7.82	42.84	74.00	-31.16	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3V

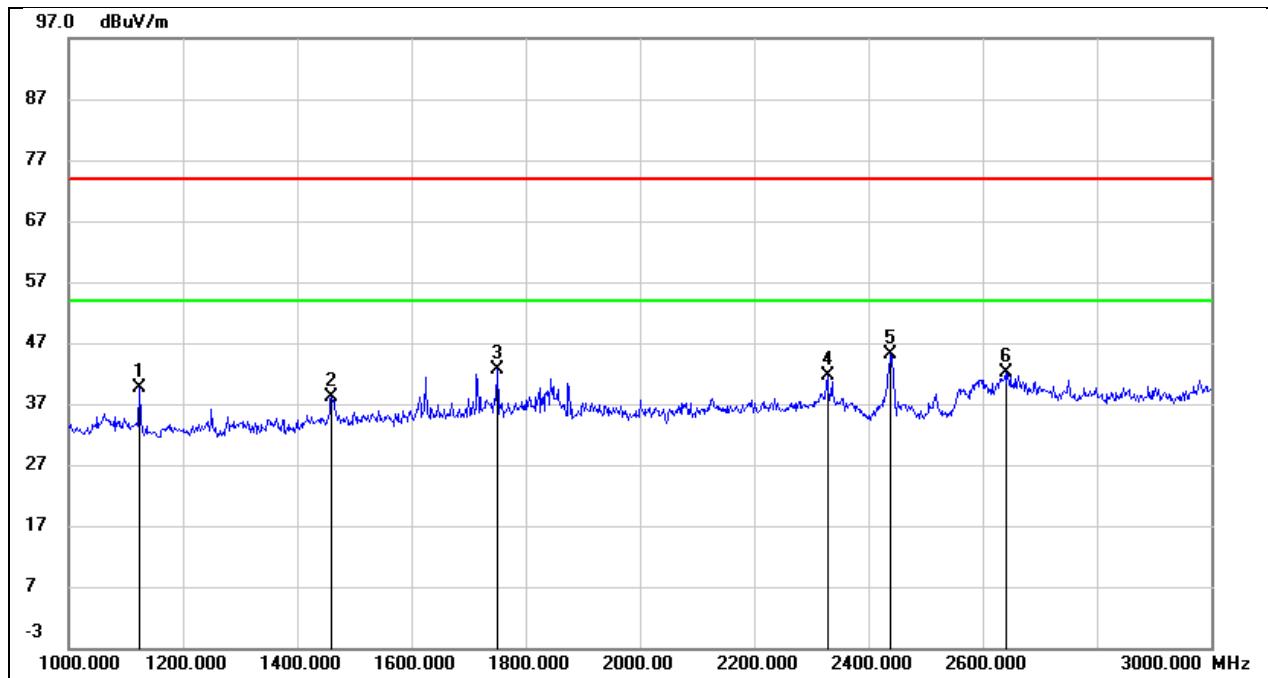

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	52.83	-13.30	39.53	74.00	-34.47	peak
2	1460.000	50.00	-11.96	38.04	74.00	-35.96	peak
3	1750.000	52.54	-9.82	42.72	74.00	-31.28	peak
4	2328.000	49.56	-8.02	41.54	74.00	-32.46	peak
5	2438.000	52.73	-7.63	45.10	74.00	-28.90	peak
6	2640.000	48.87	-6.66	42.21	74.00	-31.79	peak


### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

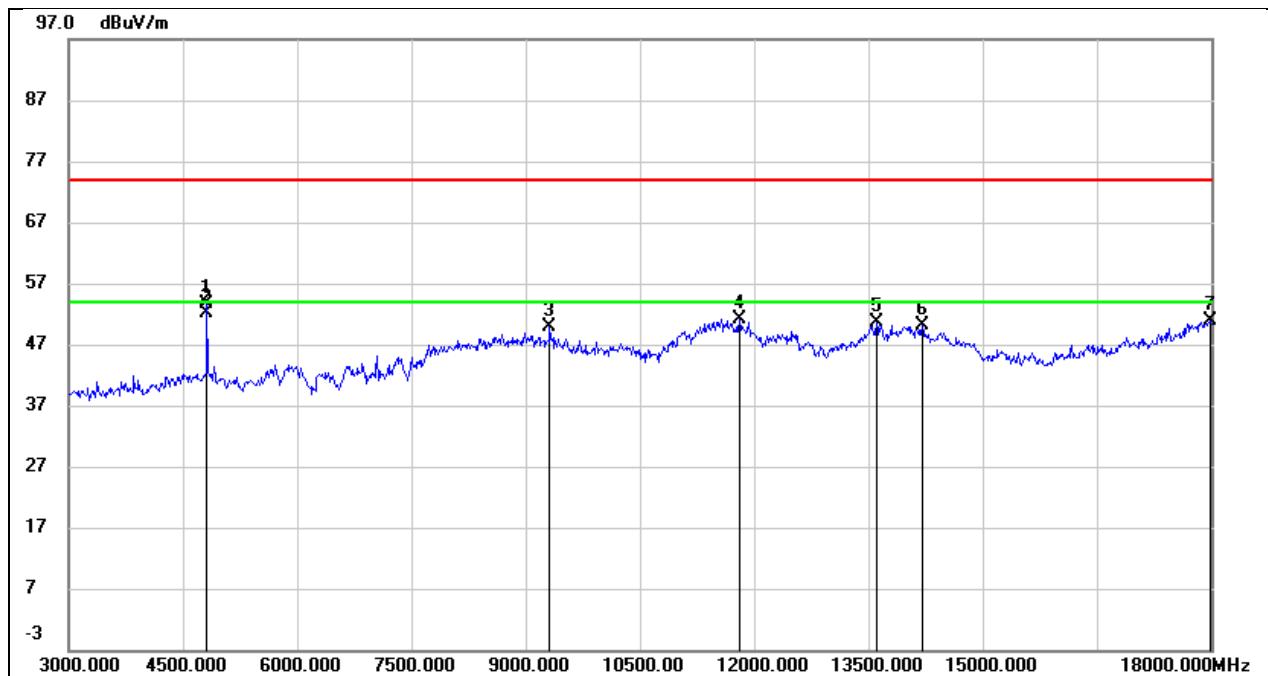


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	53.03	0.50	53.53	74.00	-20.47	peak
2	4815.000	51.61	0.50	52.11	54.00	-1.89	AVG
3	9315.000	38.27	11.58	49.85	74.00	-24.15	peak
4	11805.000	32.54	18.50	51.04	74.00	-22.96	peak
5	13605.000	28.02	22.63	50.65	74.00	-23.35	peak
6	14205.000	26.70	23.32	50.02	74.00	-23.98	peak
7	17985.000	21.47	29.49	50.96	74.00	-23.04	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

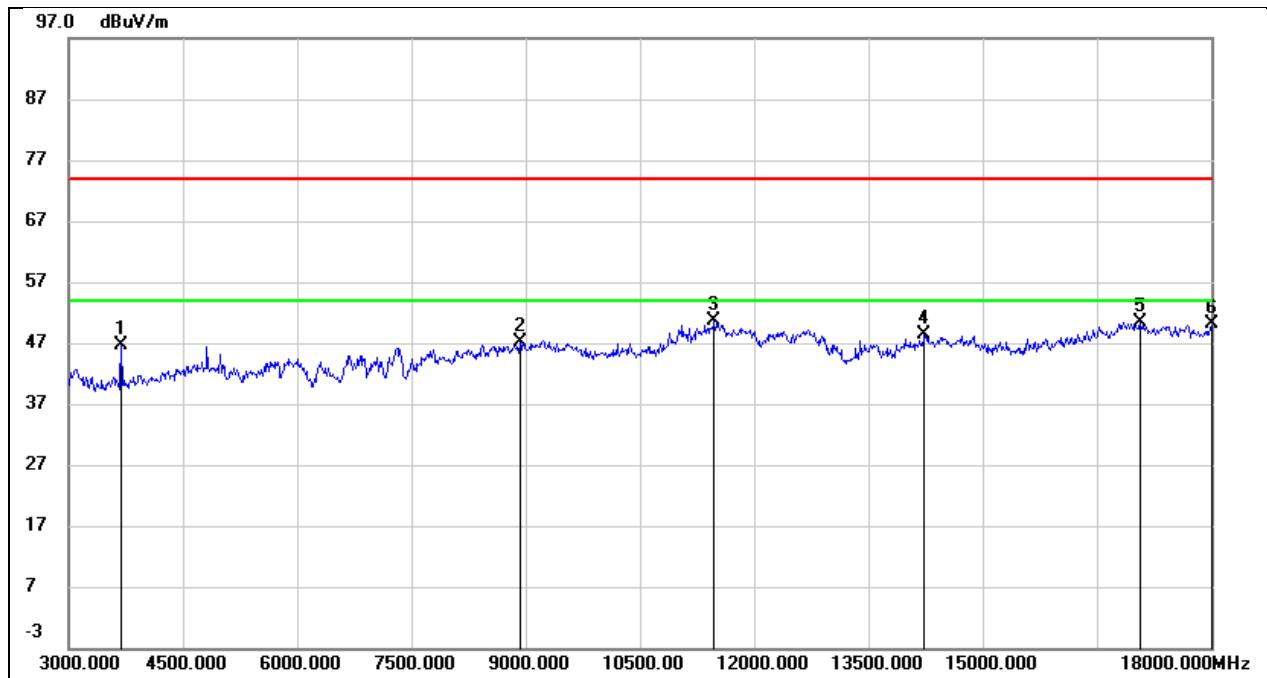


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	48.97	-2.25	46.72	74.00	-27.28	peak
2	8925.000	36.80	10.37	47.17	74.00	-26.83	peak
3	11475.000	34.14	16.42	50.56	74.00	-23.44	peak
4	14235.000	26.09	22.17	48.26	74.00	-25.74	peak
5	17070.000	25.14	25.23	50.37	74.00	-23.63	peak
6	18000.000	22.57	27.44	50.01	74.00	-23.99	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

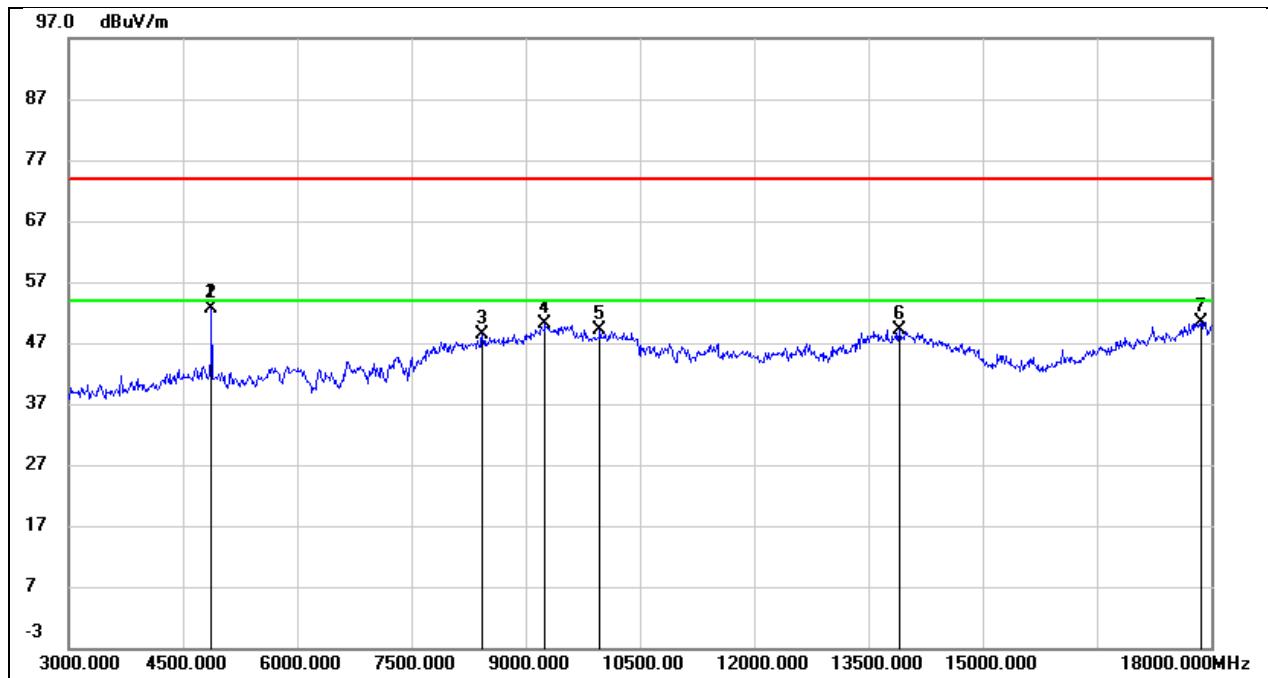


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	52.08	0.65	52.73	74.00	-21.27	peak
2	4875.000	51.61	0.65	52.26	54.00	-1.74	AVG
3	8430.000	39.57	8.93	48.50	74.00	-25.50	peak
4	9255.000	38.73	11.32	50.05	74.00	-23.95	peak
5	9975.000	35.67	13.34	49.01	74.00	-24.99	peak
6	13905.000	25.70	23.38	49.08	74.00	-24.92	peak
7	17865.000	22.19	28.26	50.45	74.00	-23.55	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

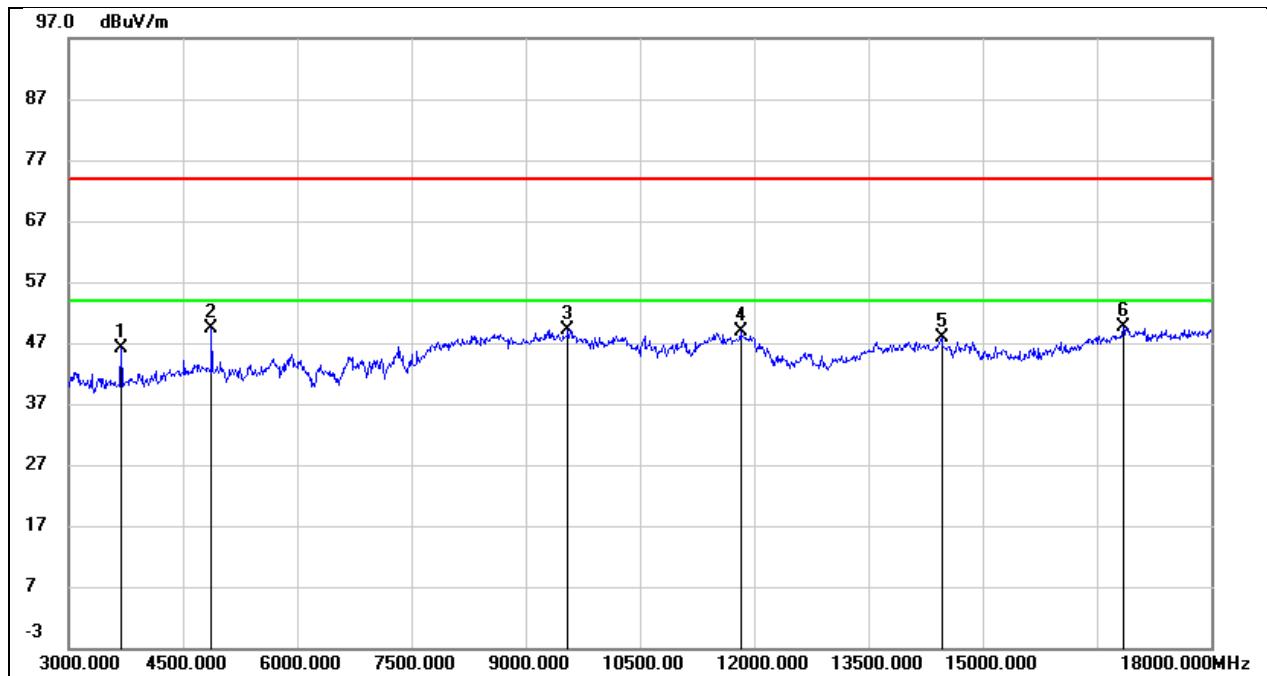


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	48.36	-2.25	46.11	74.00	-27.89	peak
2	4875.000	47.53	1.78	49.31	74.00	-24.69	peak
3	9555.000	36.60	12.57	49.17	74.00	-24.83	peak
4	11820.000	31.53	17.27	48.80	74.00	-25.20	peak
5	14460.000	26.26	21.64	47.90	74.00	-26.10	peak
6	16845.000	24.52	24.99	49.51	74.00	-24.49	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

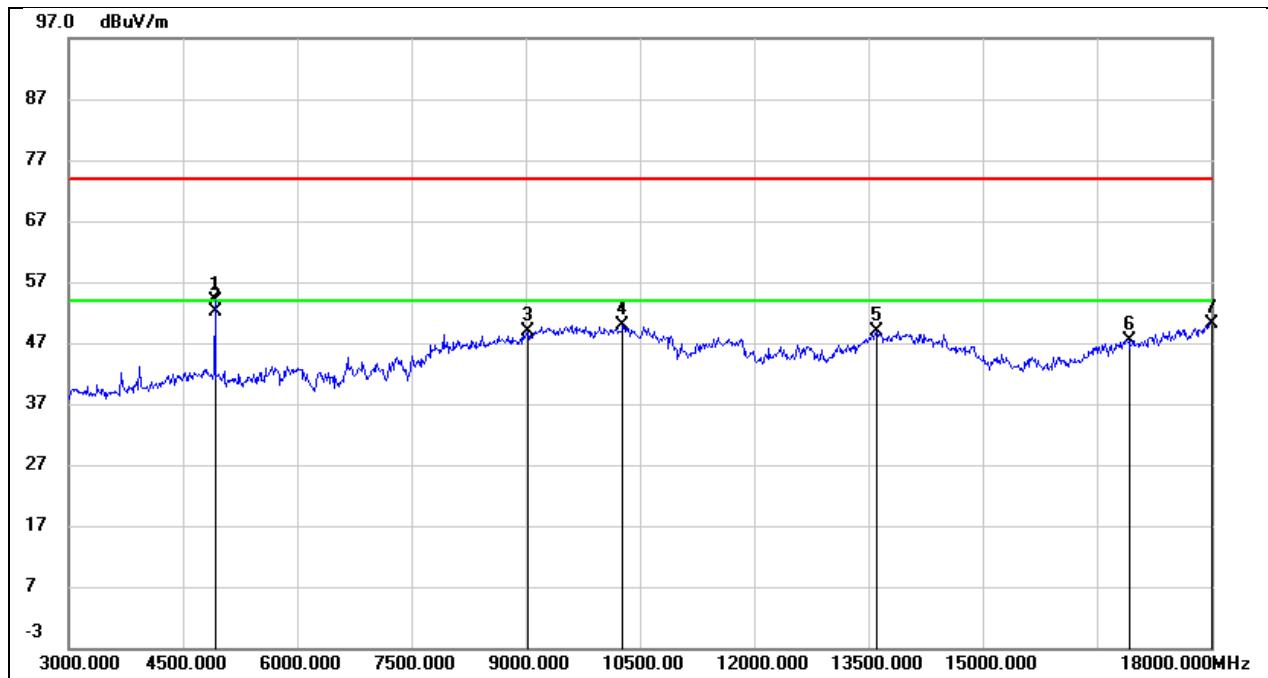


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	53.22	0.76	53.98	74.00	-20.02	peak
2	4920.000	51.49	0.76	52.25	54.00	-1.75	AVG
3	9030.000	38.64	10.31	48.95	74.00	-25.05	peak
4	10275.000	36.41	13.36	49.77	74.00	-24.23	peak
5	13605.000	26.33	22.63	48.96	74.00	-25.04	peak
6	16920.000	24.11	23.38	47.49	74.00	-26.51	peak
7	18000.000	20.60	29.64	50.24	74.00	-23.76	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3V

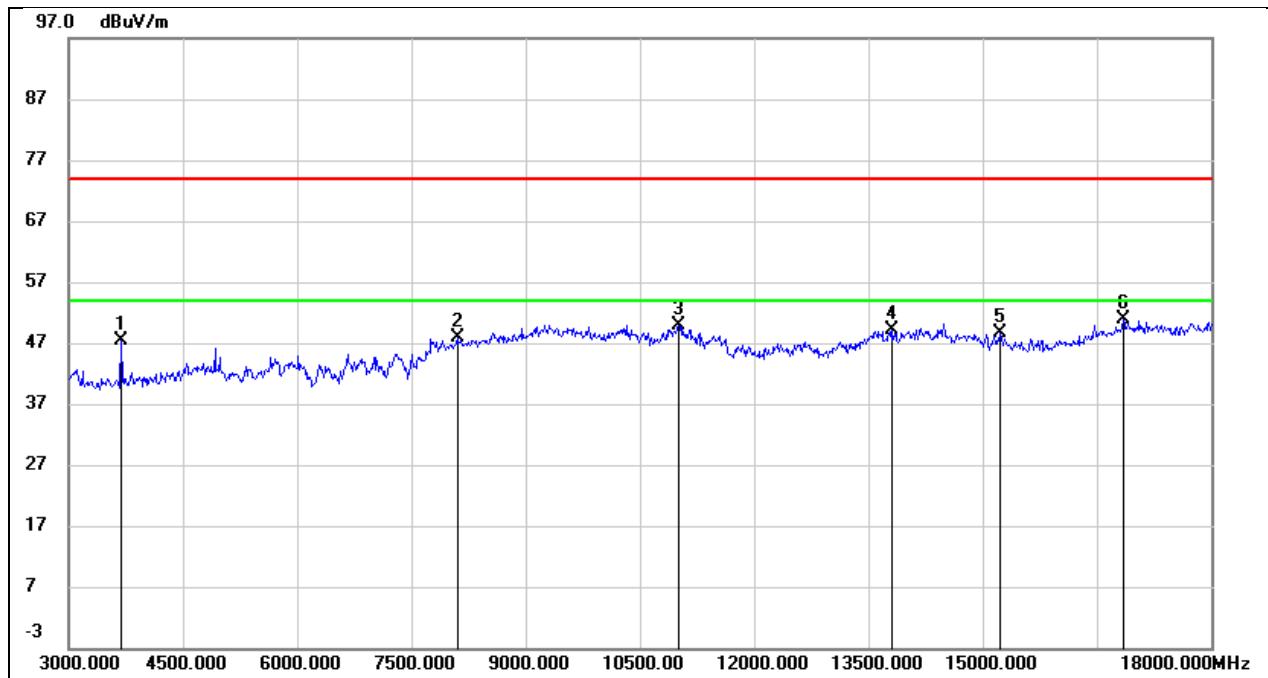


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	49.71	-2.25	47.46	74.00	-26.54	peak
2	8100.000	39.17	8.81	47.98	74.00	-26.02	peak
3	11010.000	34.73	15.20	49.93	74.00	-24.07	peak
4	13815.000	27.78	21.36	49.14	74.00	-24.86	peak
5	15225.000	28.09	20.48	48.57	74.00	-25.43	peak
6	16845.000	26.01	24.99	51.00	74.00	-23.00	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

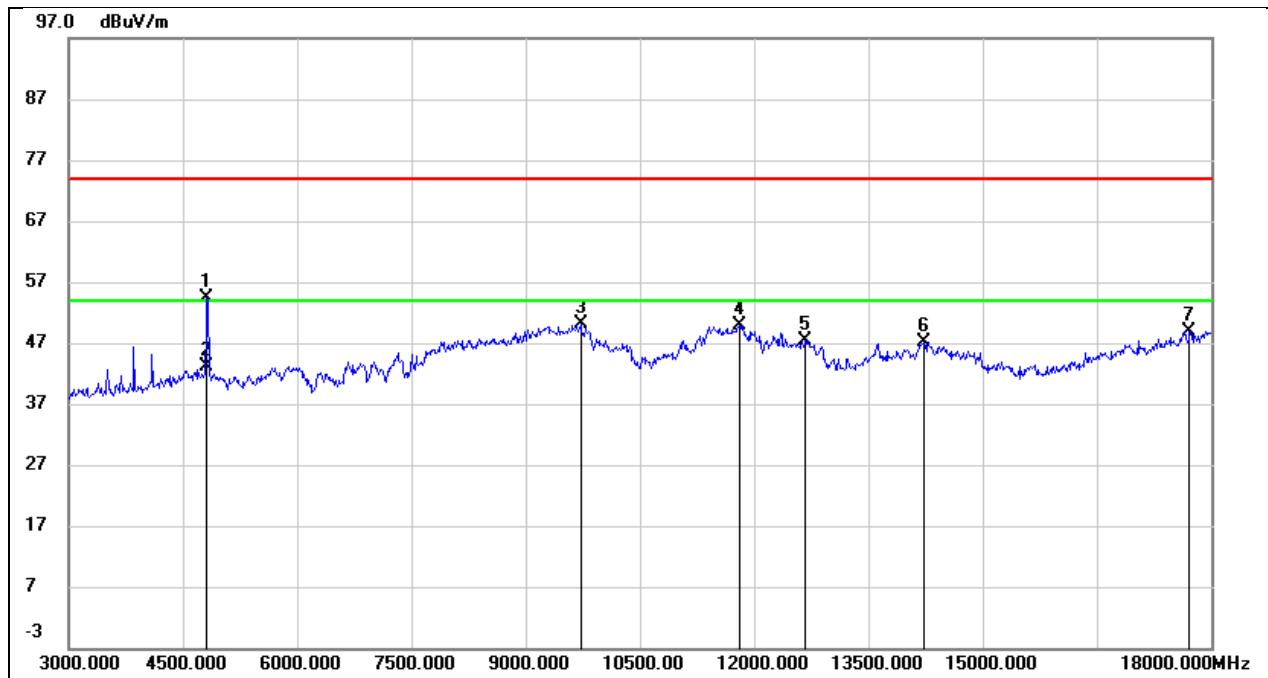


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	53.77	0.50	54.27	74.00	-19.73	peak
2	4815.000	42.65	0.50	43.15	54.00	-10.85	AVG
3	9720.000	37.07	13.11	50.18	74.00	-23.82	peak
4	11805.000	31.33	18.50	49.83	74.00	-24.17	peak
5	12675.000	28.27	19.18	47.45	74.00	-26.55	peak
6	14235.000	23.90	23.16	47.06	74.00	-26.94	peak
7	17715.000	21.99	26.98	48.97	74.00	-25.03	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

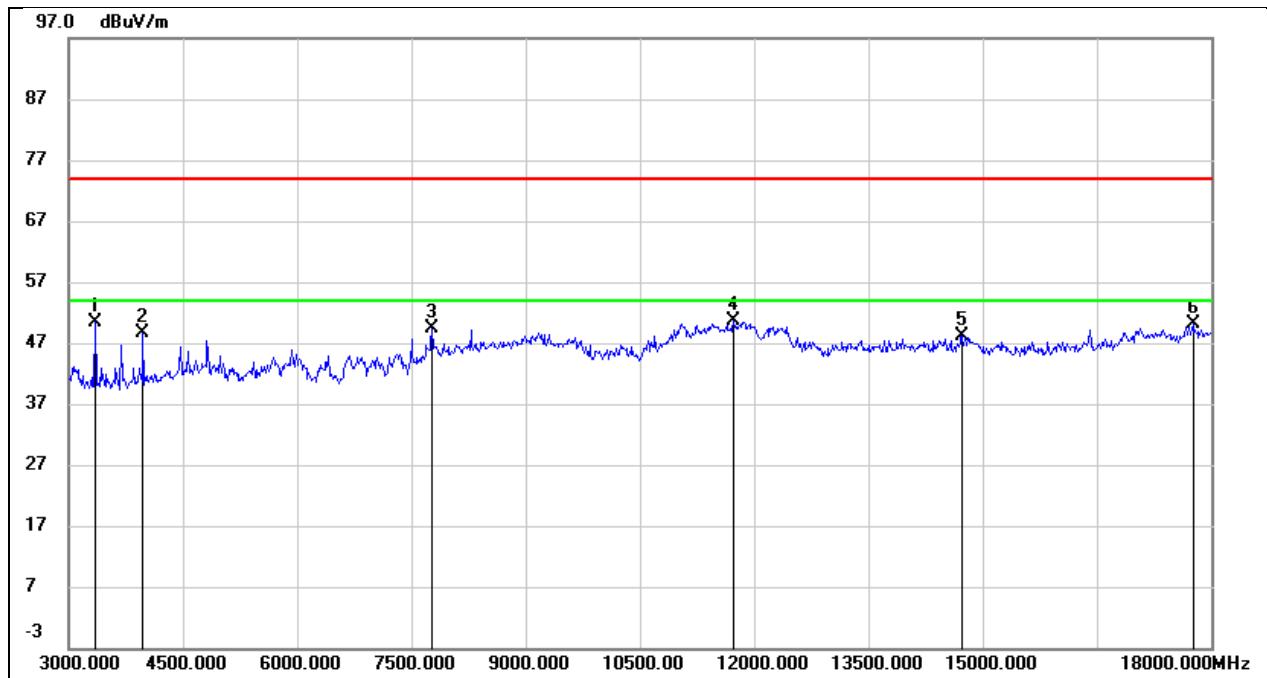


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3345.000	53.41	-2.96	50.45	74.00	-23.55	peak
2	3975.000	49.92	-1.25	48.67	74.00	-25.33	peak
3	7770.000	41.27	8.18	49.45	74.00	-24.55	peak
4	11730.000	33.69	17.06	50.75	74.00	-23.25	peak
5	14730.000	27.09	21.07	48.16	74.00	-25.84	peak
6	17760.000	23.96	26.16	50.12	74.00	-23.88	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

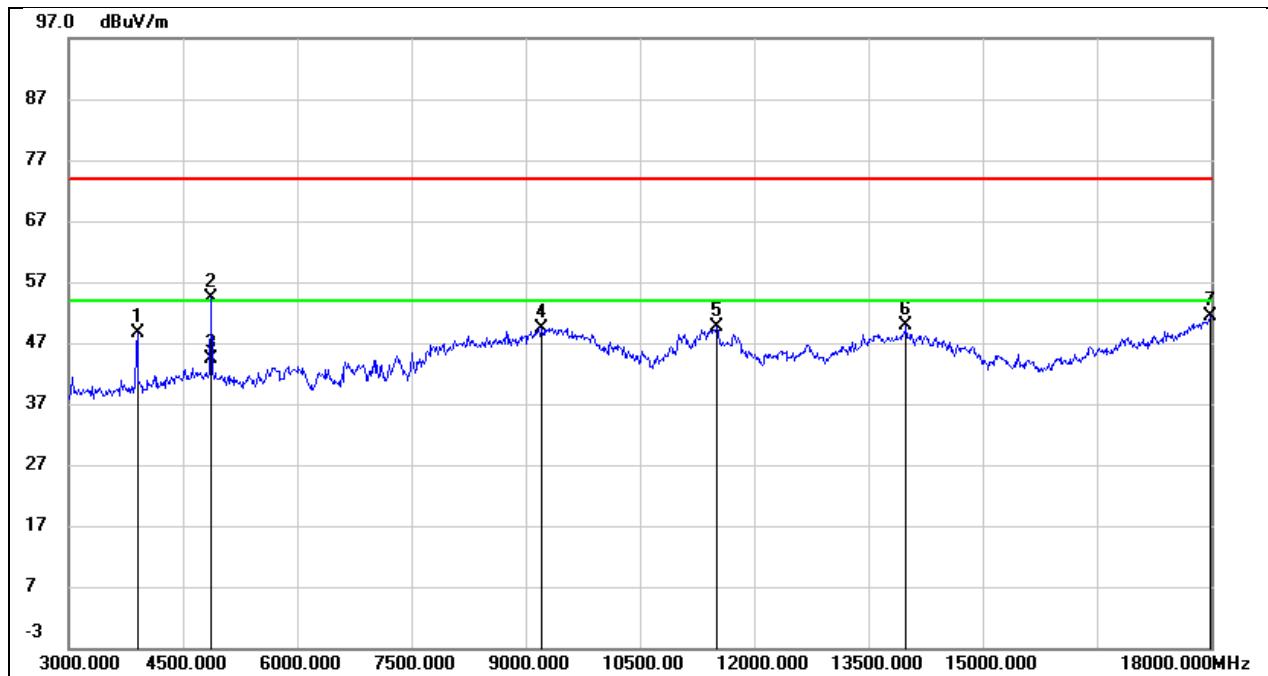


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3900.000	51.11	-2.60	48.51	74.00	-25.49	peak
2	4875.000	53.70	0.65	54.35	74.00	-19.65	peak
3	4875.000	43.70	0.65	44.35	54.00	-9.65	AVG
4	9210.000	38.29	11.13	49.42	74.00	-24.58	peak
5	11505.000	31.56	17.99	49.55	74.00	-24.45	peak
6	13995.000	26.01	23.78	49.79	74.00	-24.21	peak
7	17985.000	21.92	29.49	51.41	74.00	-22.59	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

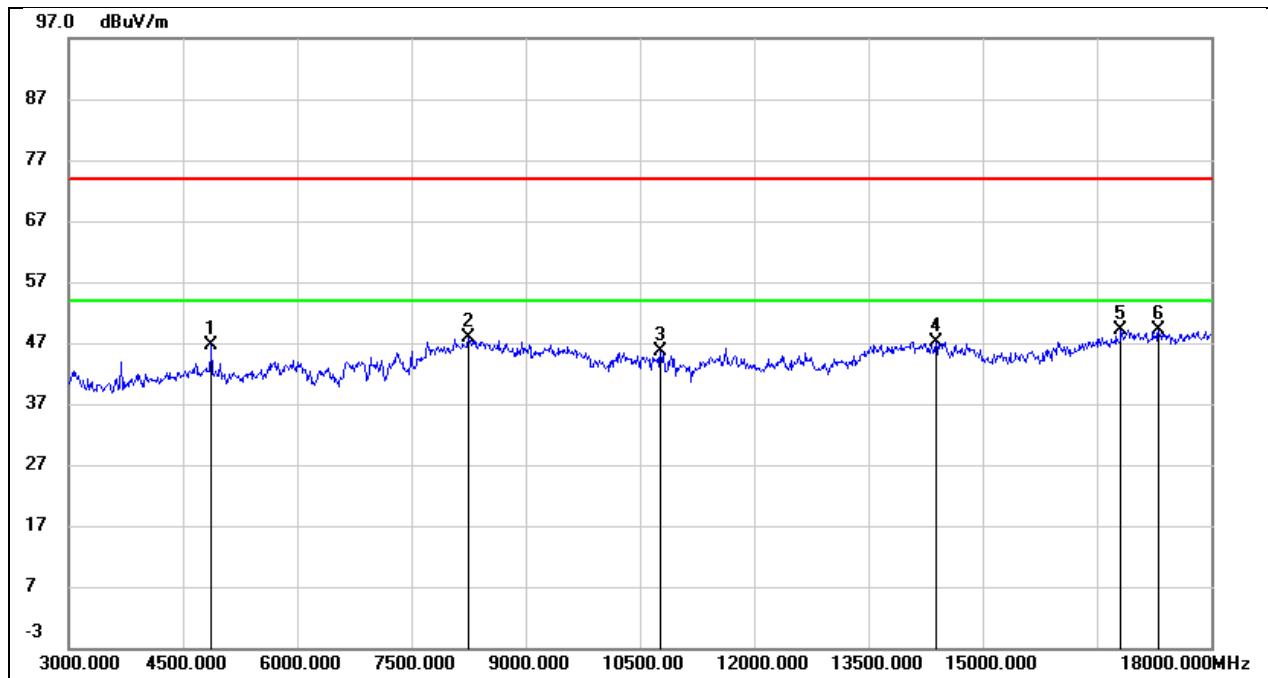


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.85	1.78	46.63	74.00	-27.37	peak
2	8250.000	38.72	9.18	47.90	74.00	-26.10	peak
3	10770.000	31.43	14.23	45.66	74.00	-28.34	peak
4	14385.000	25.48	21.77	47.25	74.00	-26.75	peak
5	16815.000	24.27	24.95	49.22	74.00	-24.78	peak
6	17310.000	23.73	25.36	49.09	74.00	-24.91	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

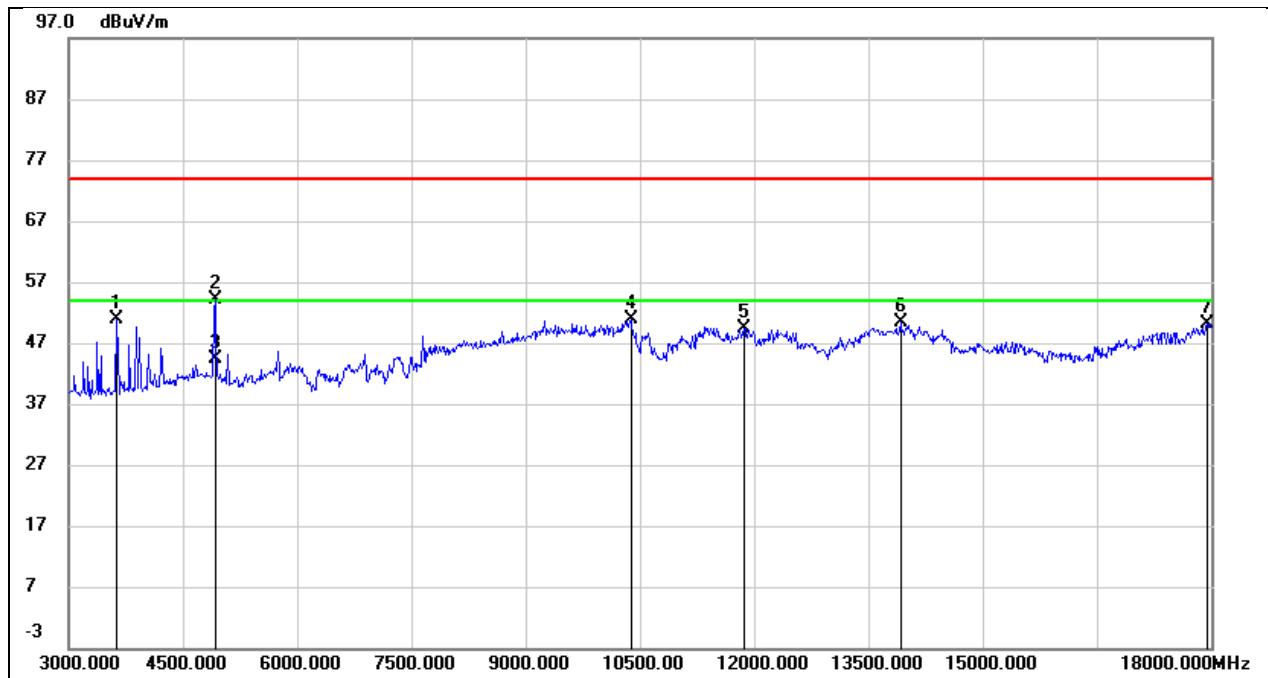


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3630.000	54.41	-3.48	50.93	74.00	-23.07	peak
2	4920.000	53.30	0.76	54.06	74.00	-19.94	peak
3	4920.000	43.55	0.76	44.31	54.00	-9.69	AVG
4	10380.000	37.50	13.46	50.96	74.00	-23.04	peak
5	11865.000	30.92	18.57	49.49	74.00	-24.51	peak
6	13920.000	26.84	23.45	50.29	74.00	-23.71	peak
7	17955.000	20.93	29.18	50.11	74.00	-23.89	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3V

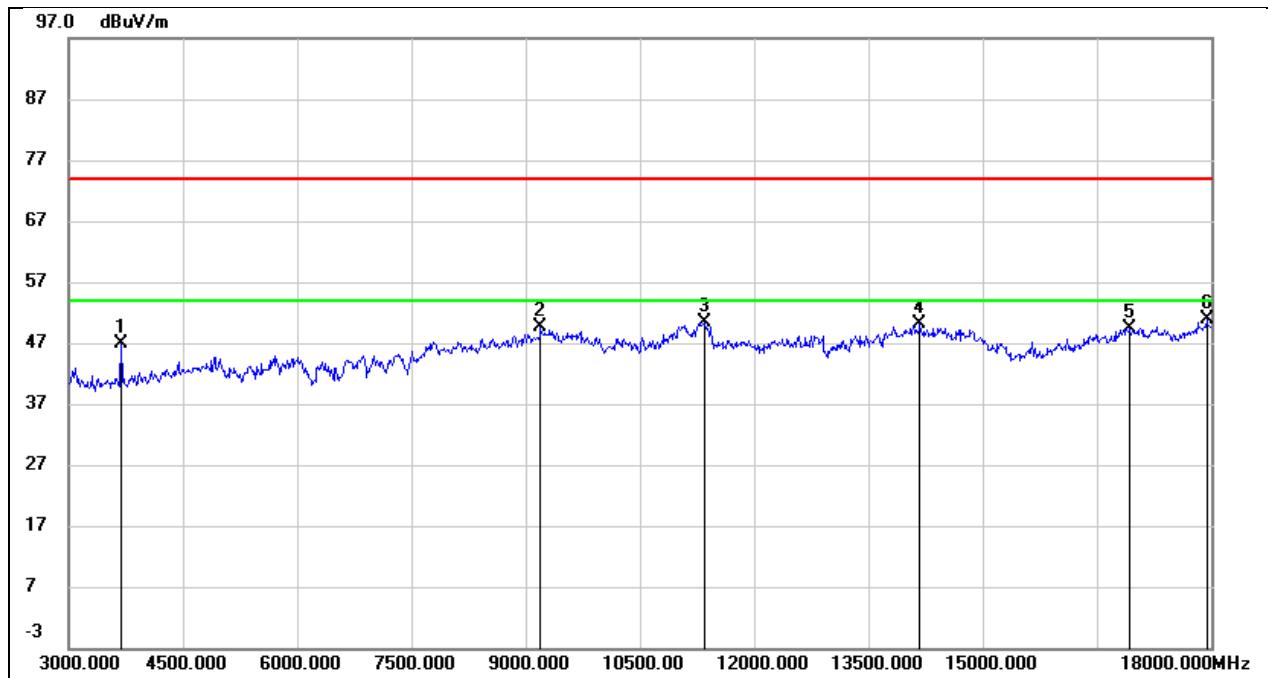


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	49.08	-2.25	46.83	74.00	-27.17	peak
2	9195.000	38.41	11.31	49.72	74.00	-24.28	peak
3	11355.000	34.16	16.20	50.36	74.00	-23.64	peak
4	14175.000	27.83	22.26	50.09	74.00	-23.91	peak
5	16935.000	24.34	25.10	49.44	74.00	-24.56	peak
6	17940.000	23.70	27.10	50.80	74.00	-23.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

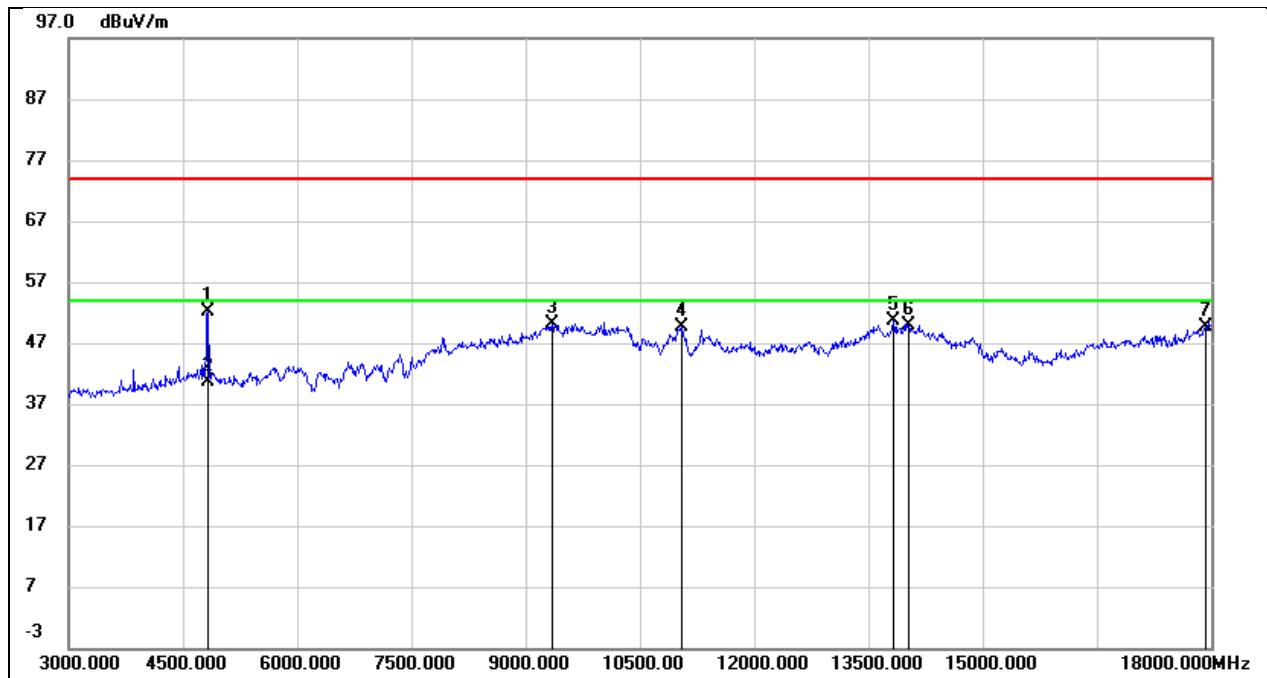


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	51.66	0.54	52.20	74.00	-21.80	peak
2	4830.000	40.19	0.54	40.73	54.00	-13.27	AVG
3	9345.000	38.30	11.71	50.01	74.00	-23.99	peak
4	11040.000	33.36	16.19	49.55	74.00	-24.45	peak
5	13830.000	27.47	23.06	50.53	74.00	-23.47	peak
6	14025.000	26.21	23.74	49.95	74.00	-24.05	peak
7	17925.000	20.72	28.87	49.59	74.00	-24.41	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

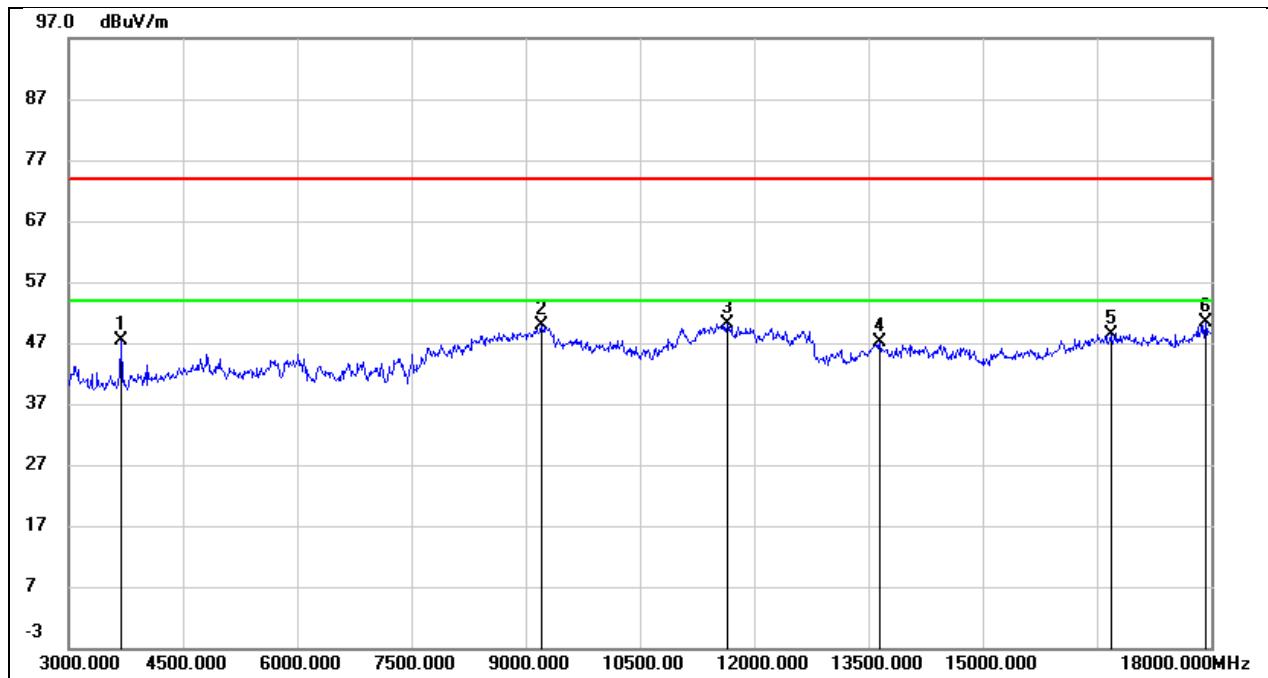


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	49.74	-2.25	47.49	74.00	-26.51	peak
2	9210.000	38.50	11.36	49.86	74.00	-24.14	peak
3	11655.000	33.36	16.88	50.24	74.00	-23.76	peak
4	13650.000	26.02	21.02	47.04	74.00	-26.96	peak
5	16680.000	23.75	24.58	48.33	74.00	-25.67	peak
6	17925.000	23.37	27.00	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

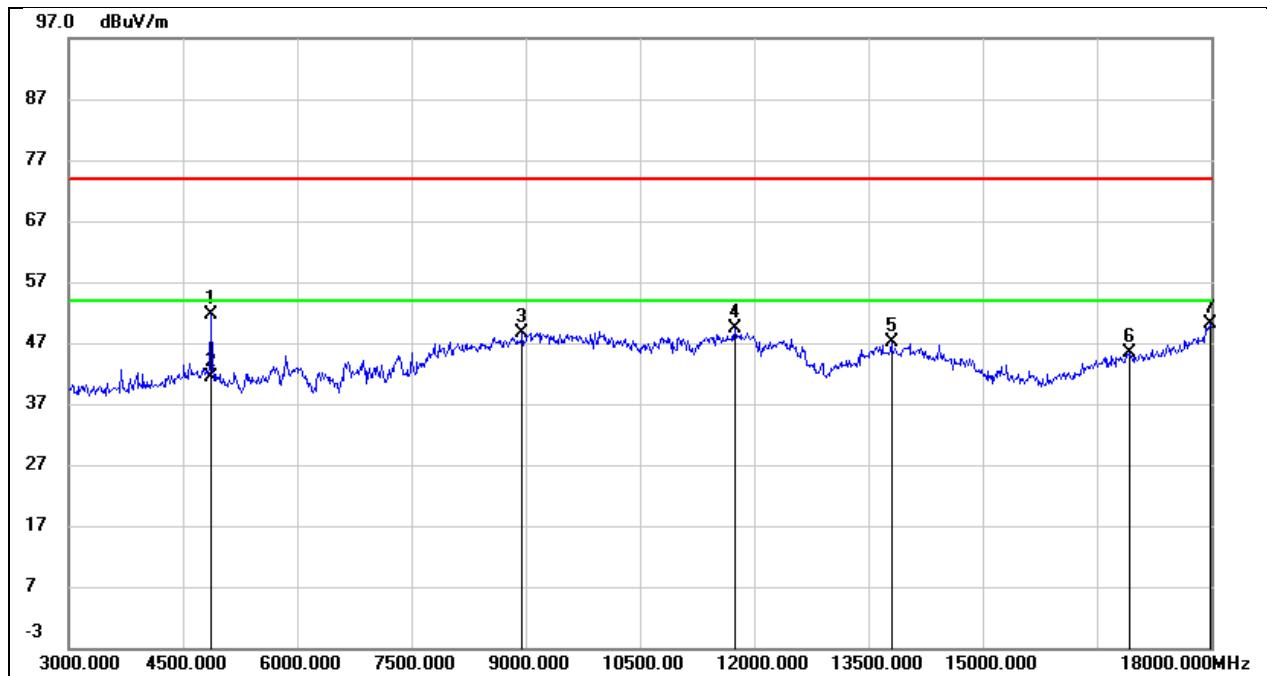


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	51.01	0.62	51.63	74.00	-22.37	peak
2	4860.000	40.75	0.62	41.37	54.00	-12.63	AVG
3	8955.000	38.55	10.04	48.59	74.00	-25.41	peak
4	11745.000	31.02	18.41	49.43	74.00	-24.57	peak
5	13800.000	24.29	22.93	47.22	74.00	-26.78	peak
6	16920.000	21.93	23.38	45.31	74.00	-28.69	peak
7	17985.000	20.67	29.49	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

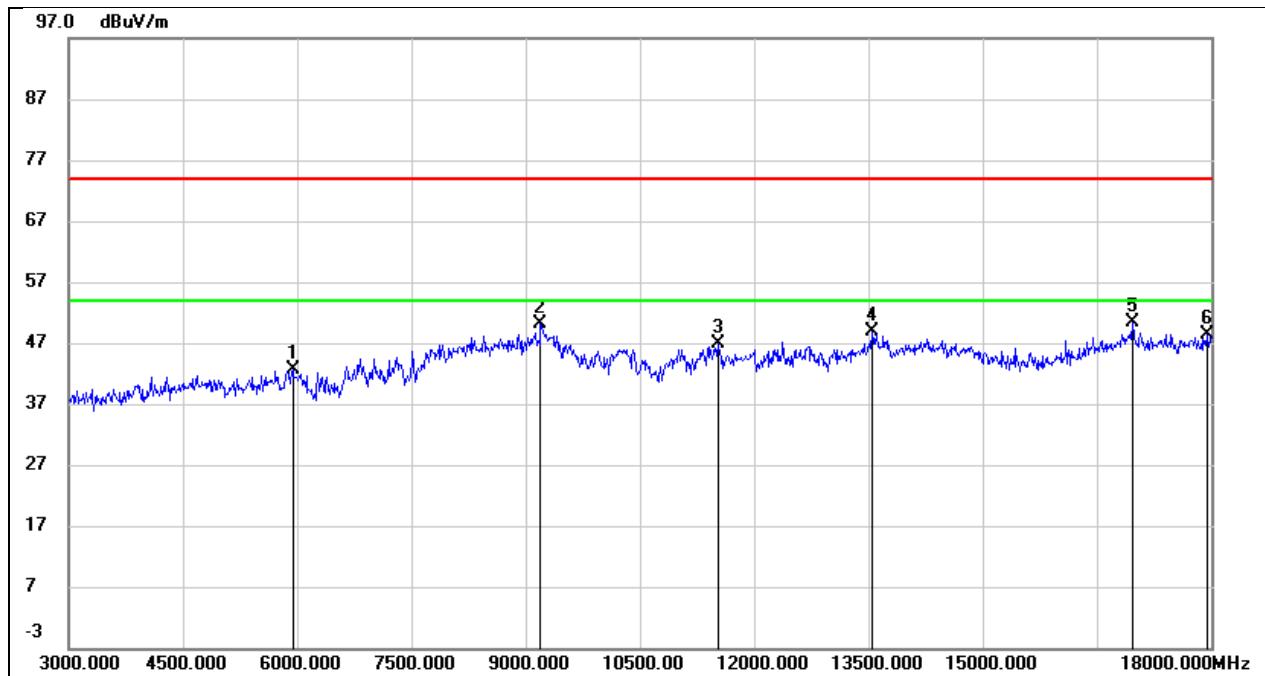


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	38.71	4.04	42.75	74.00	-31.25	peak
2	9195.000	38.82	11.31	50.13	74.00	-23.87	peak
3	11520.000	30.41	16.53	46.94	74.00	-27.06	peak
4	13545.000	28.02	20.83	48.85	74.00	-25.15	peak
5	16965.000	25.35	25.14	50.49	74.00	-23.51	peak
6	17940.000	21.24	27.10	48.34	74.00	-25.66	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

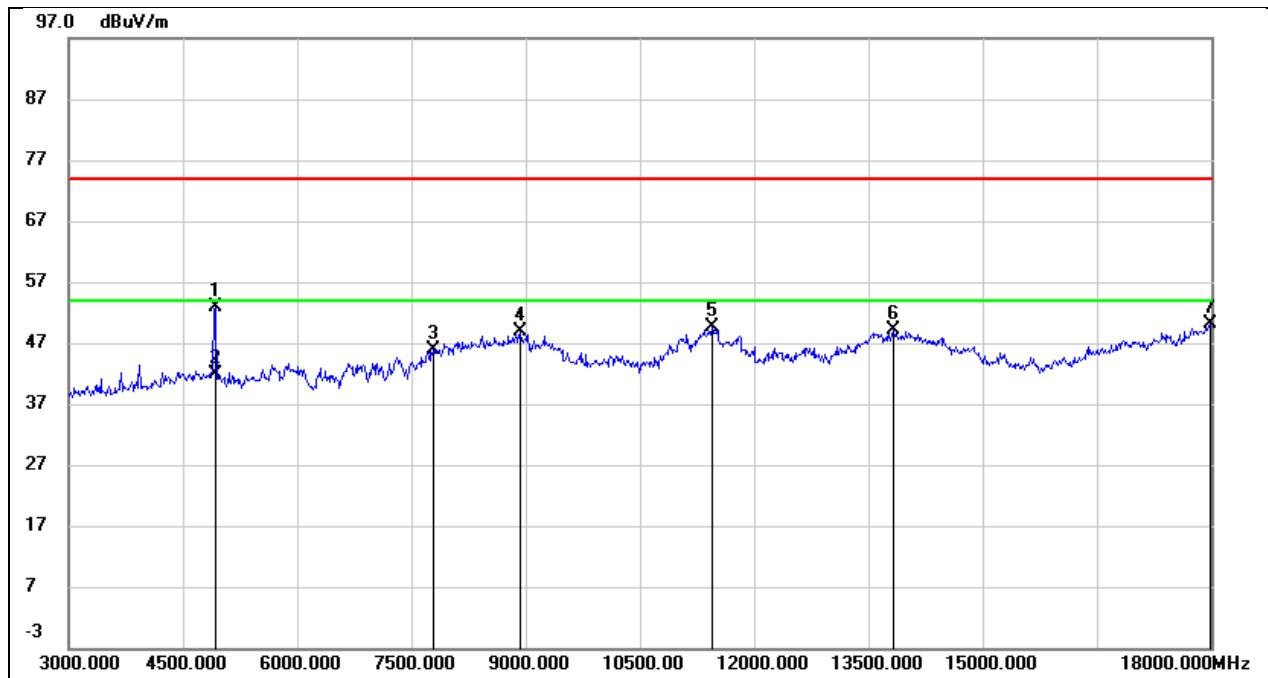


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	52.07	0.76	52.83	74.00	-21.17	peak
2	4920.000	41.24	0.76	42.00	54.00	-12.00	AVG
3	7785.000	38.27	7.68	45.95	74.00	-28.05	peak
4	8925.000	38.86	9.94	48.80	74.00	-25.20	peak
5	11445.000	31.81	17.78	49.59	74.00	-24.41	peak
6	13830.000	26.05	23.06	49.11	74.00	-24.89	peak
7	17985.000	20.54	29.49	50.03	74.00	-23.97	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3V

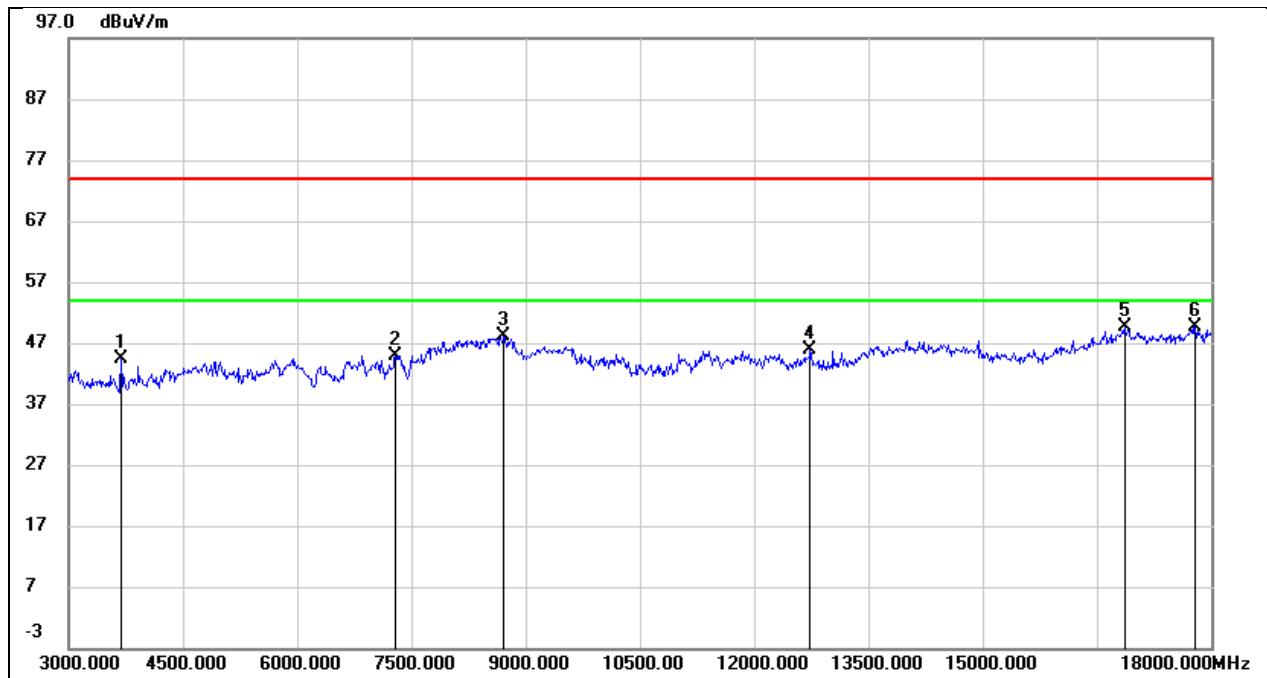


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	46.53	-2.25	44.28	74.00	-29.72	peak
2	7290.000	37.26	7.68	44.94	74.00	-29.06	peak
3	8715.000	38.28	9.97	48.25	74.00	-25.75	peak
4	12735.000	27.57	18.29	45.86	74.00	-28.14	peak
5	16860.000	24.74	25.00	49.74	74.00	-24.26	peak
6	17790.000	23.44	26.25	49.69	74.00	-24.31	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

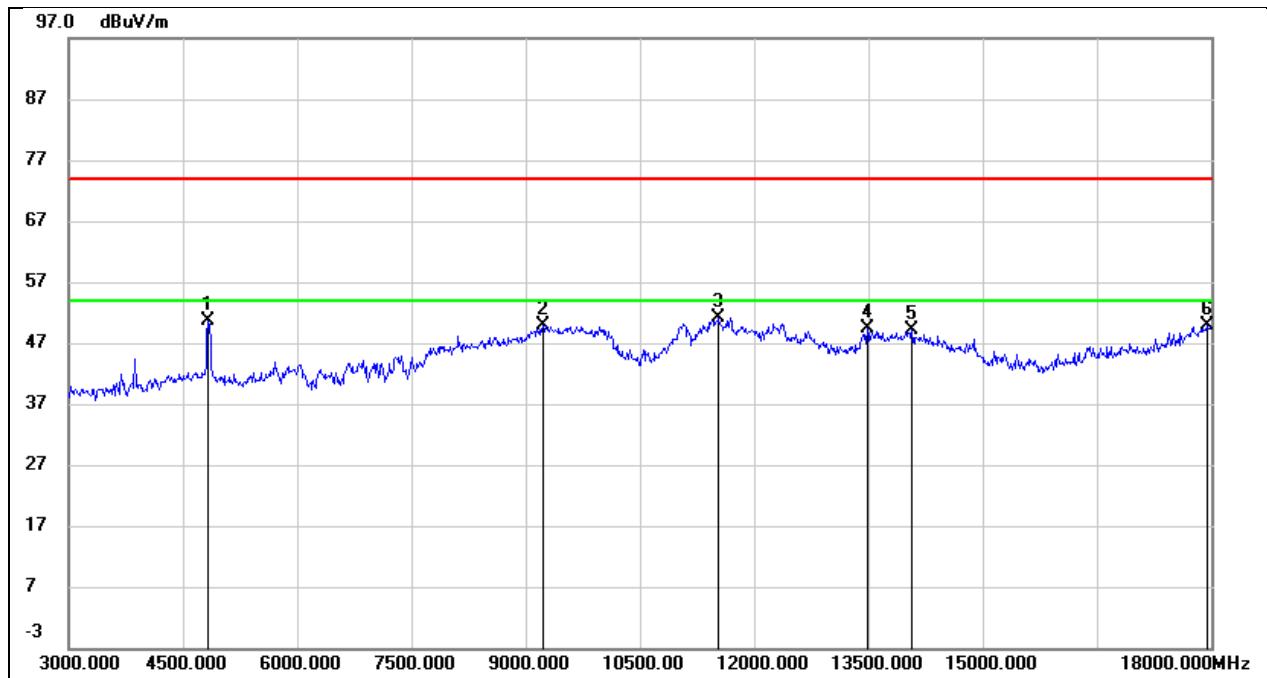


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	50.09	0.54	50.63	74.00	-23.37	peak
2	9225.000	38.75	11.19	49.94	74.00	-24.06	peak
3	11535.000	33.14	18.05	51.19	74.00	-22.81	peak
4	13485.000	27.00	22.39	49.39	74.00	-24.61	peak
5	14070.000	25.52	23.65	49.17	74.00	-24.83	peak
6	17940.000	20.90	29.03	49.93	74.00	-24.07	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 3.3V

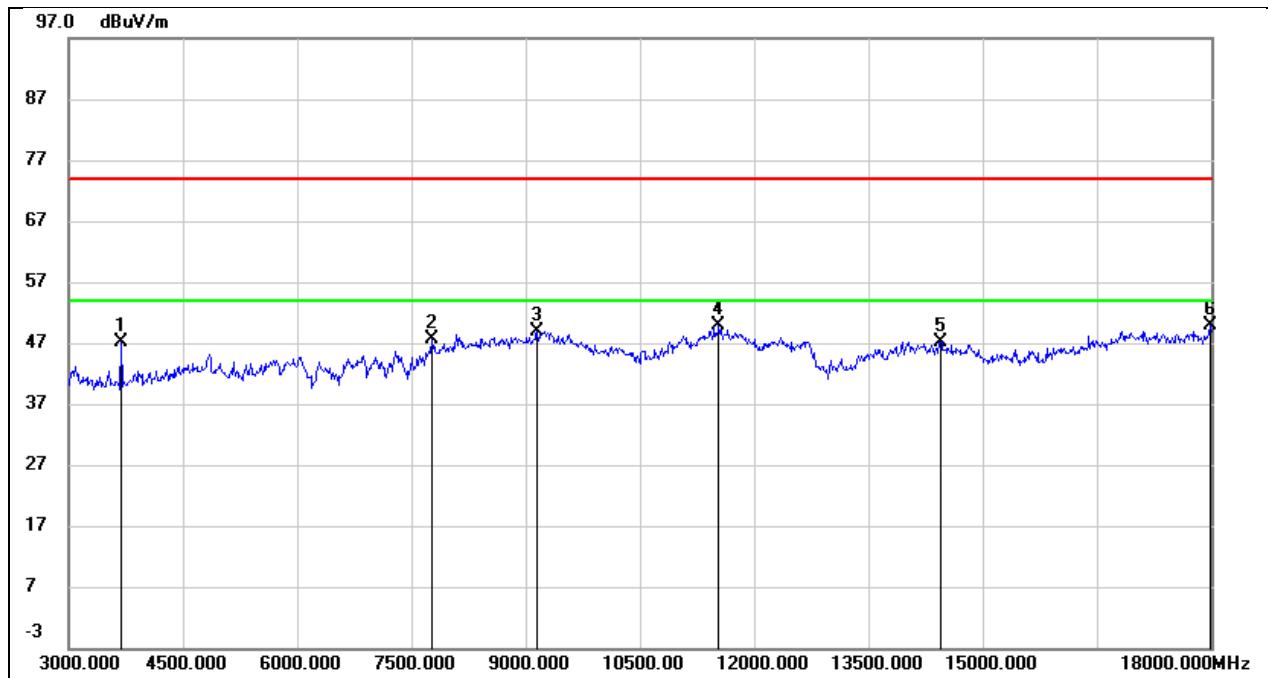


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	49.31	-2.25	47.06	74.00	-26.94	peak
2	7770.000	39.46	8.18	47.64	74.00	-26.36	peak
3	9150.000	37.78	11.15	48.93	74.00	-25.07	peak
4	11535.000	33.31	16.57	49.88	74.00	-24.12	peak
5	14445.000	25.58	21.66	47.24	74.00	-26.76	peak
6	17985.000	22.47	27.35	49.82	74.00	-24.18	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

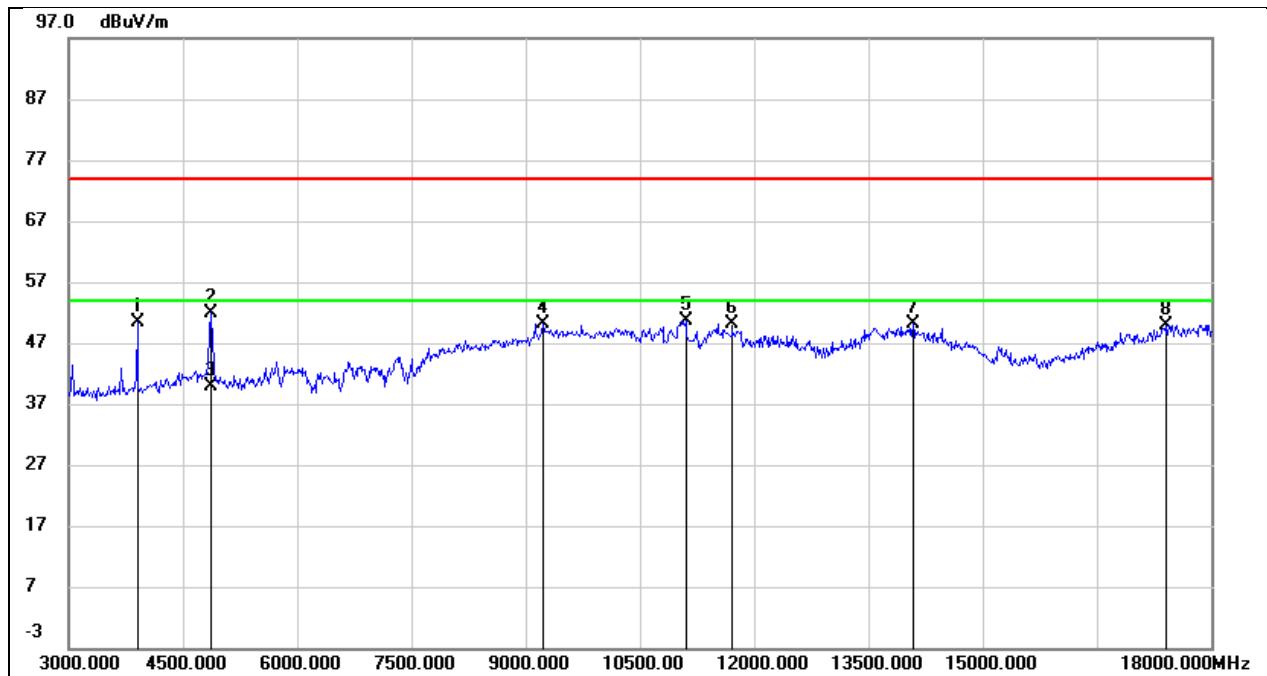


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3900.000	52.87	-2.60	50.27	74.00	-23.73	peak
2	4860.000	51.37	0.62	51.99	74.00	-22.01	peak
3	4860.000	39.17	0.62	39.79	54.00	-14.21	AVG
4	9225.000	38.93	11.19	50.12	74.00	-23.88	peak
5	11100.000	34.17	16.54	50.71	74.00	-23.29	peak
6	11715.000	31.66	18.35	50.01	74.00	-23.99	peak
7	14085.000	26.43	23.61	50.04	74.00	-23.96	peak
8	17400.000	24.88	25.05	49.93	74.00	-24.07	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

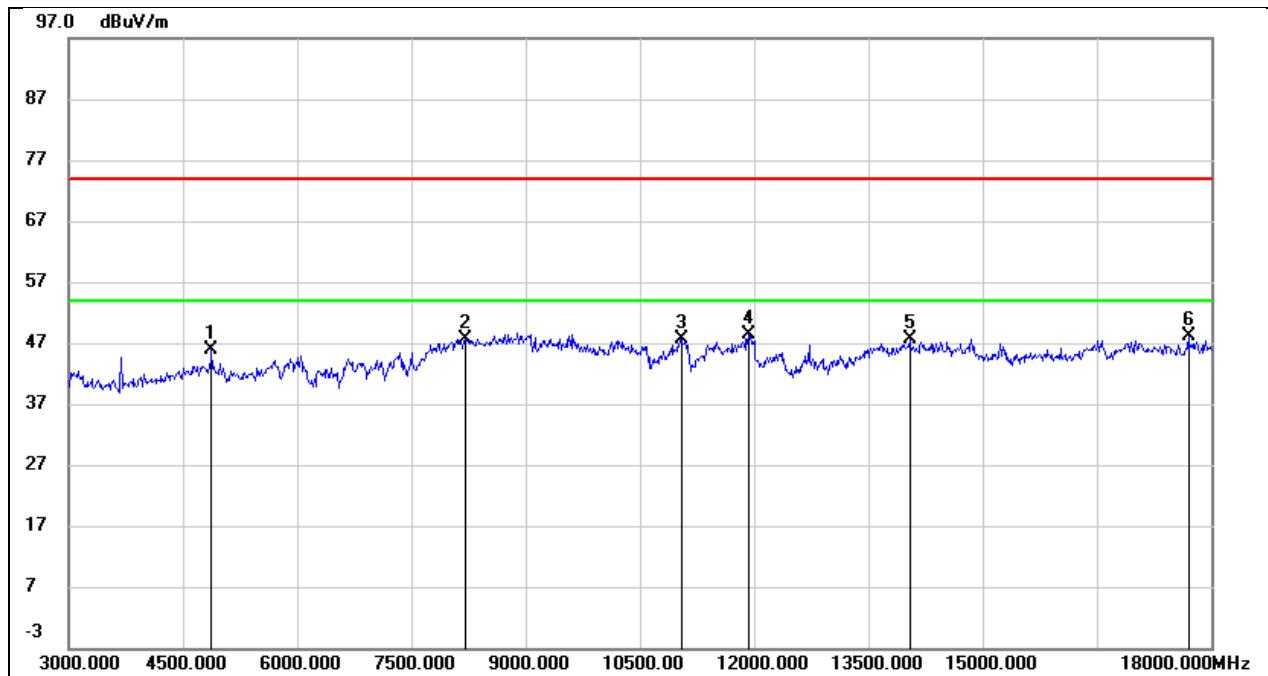


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.05	1.78	45.83	74.00	-28.17	peak
2	8205.000	38.60	9.10	47.70	74.00	-26.30	peak
3	11040.000	32.34	15.33	47.67	74.00	-26.33	peak
4	11925.000	30.91	17.47	48.38	74.00	-25.62	peak
5	14040.000	25.49	22.21	47.70	74.00	-26.30	peak
6	17700.000	22.17	25.99	48.16	74.00	-25.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

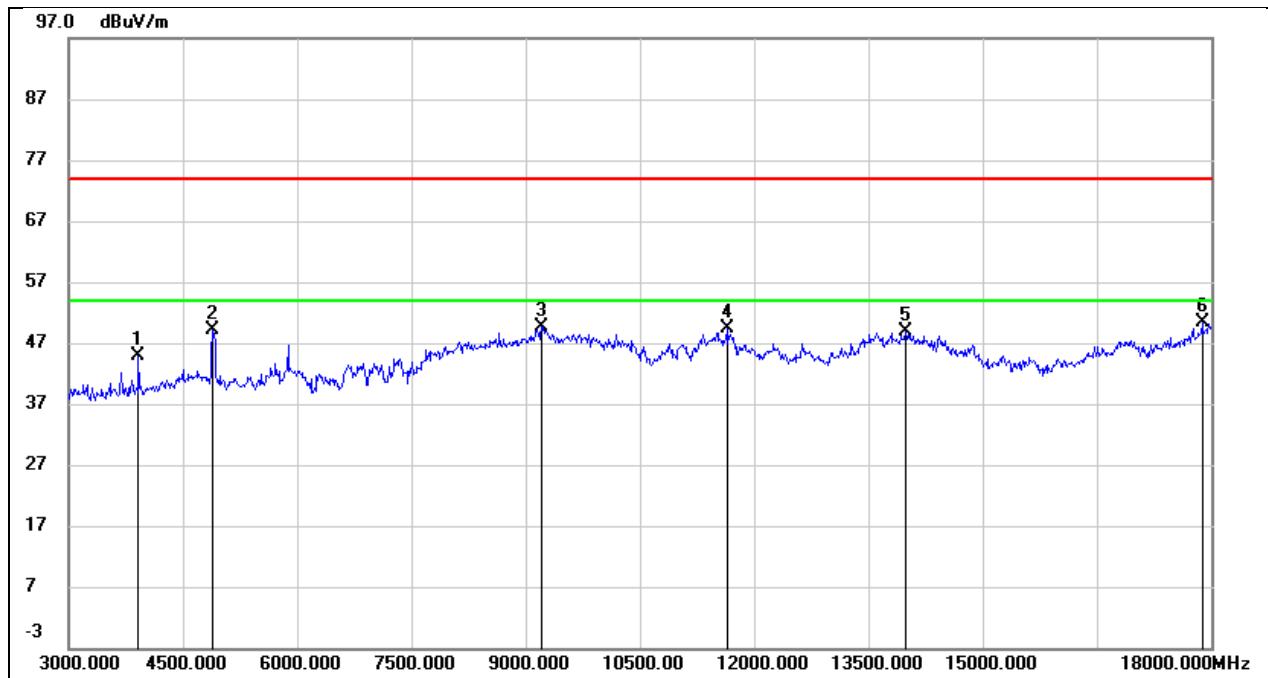


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3915.000	47.30	-2.54	44.76	74.00	-29.24	peak
2	4890.000	48.43	0.68	49.11	74.00	-24.89	peak
3	9210.000	38.49	11.13	49.62	74.00	-24.38	peak
4	11640.000	31.15	18.23	49.38	74.00	-24.62	peak
5	13995.000	25.01	23.78	48.79	74.00	-25.21	peak
6	17880.000	22.06	28.42	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 3.3V

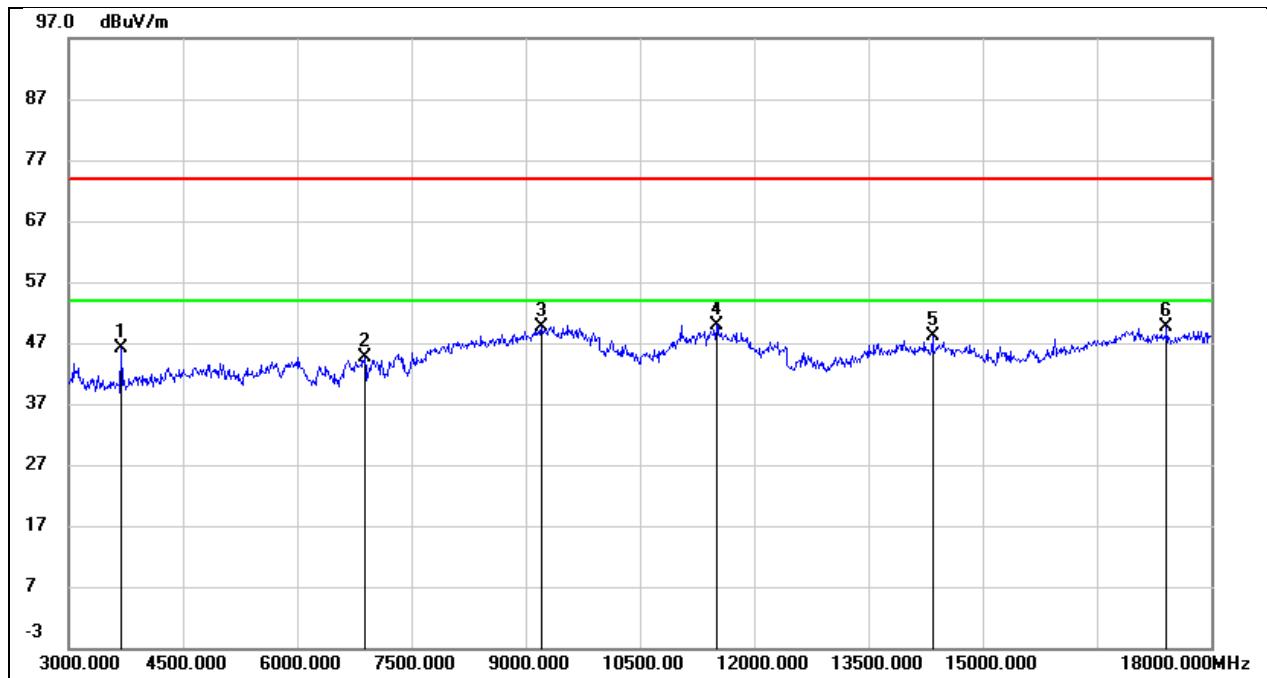


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	48.35	-2.25	46.10	74.00	-27.90	peak
2	6885.000	37.77	6.95	44.72	74.00	-29.28	peak
3	9210.000	38.21	11.36	49.57	74.00	-24.43	peak
4	11505.000	33.34	16.50	49.84	74.00	-24.16	peak
5	14340.000	26.14	21.89	48.03	74.00	-25.97	peak
6	17415.000	24.17	25.40	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

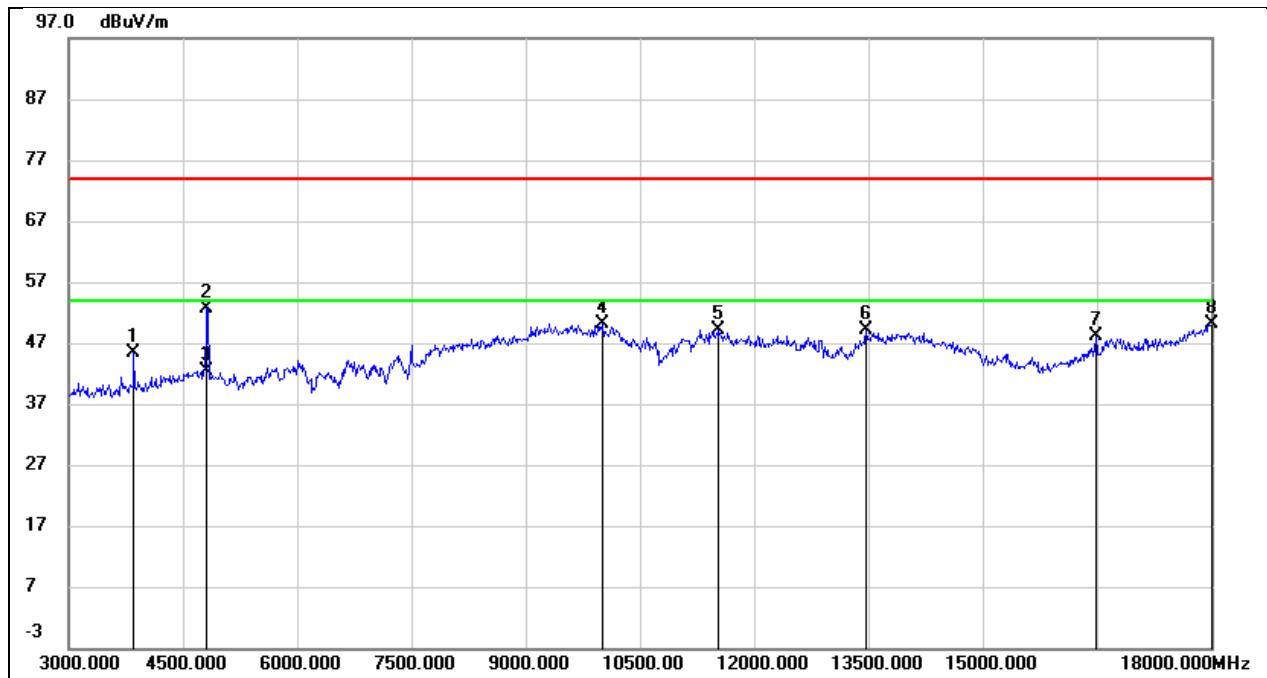


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3855.000	48.25	-2.75	45.50	74.00	-28.50	peak
2	4815.000	52.16	0.50	52.66	74.00	-21.34	peak
3	4815.000	41.90	0.50	42.40	54.00	-11.60	AVG
4	10005.000	36.74	13.33	50.07	74.00	-23.93	peak
5	11535.000	31.08	18.05	49.13	74.00	-24.87	peak
6	13470.000	26.85	22.32	49.17	74.00	-24.83	peak
7	16485.000	25.80	22.28	48.08	74.00	-25.92	peak
8	18000.000	20.50	29.64	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

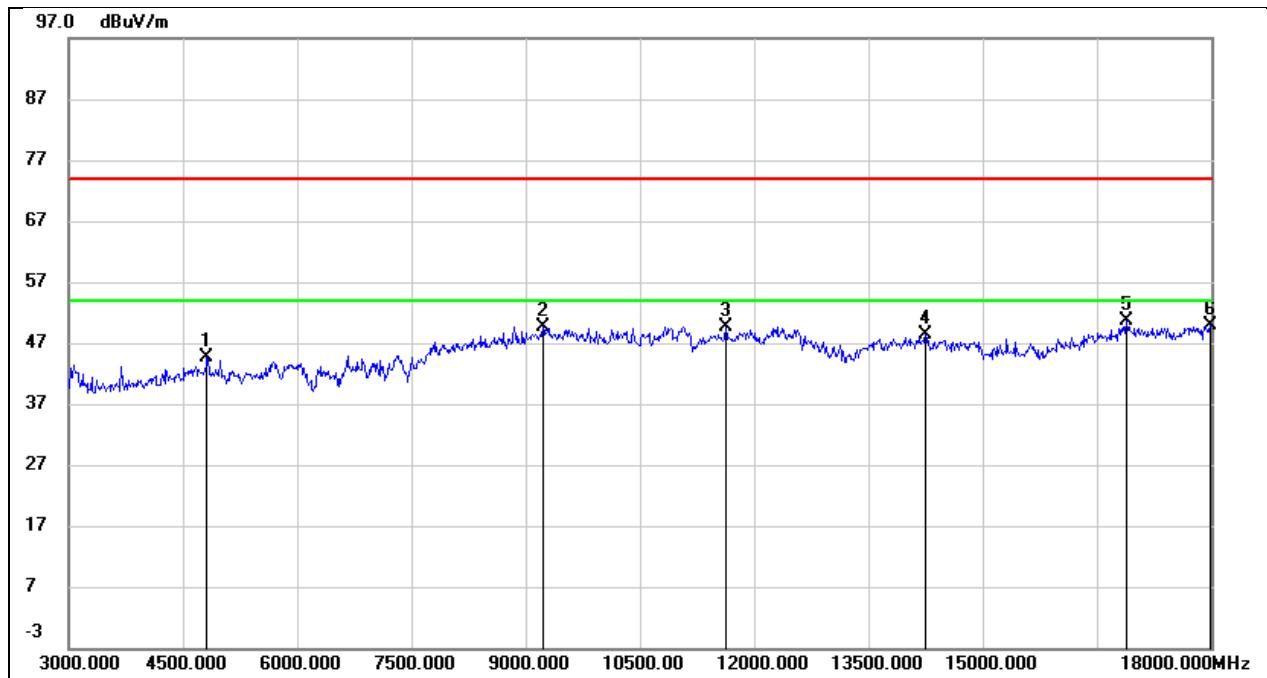


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.11	1.59	44.70	74.00	-29.30	peak
2	9225.000	38.15	11.41	49.56	74.00	-24.44	peak
3	11625.000	32.87	16.81	49.68	74.00	-24.32	peak
4	14250.000	26.21	22.13	48.34	74.00	-25.66	peak
5	16890.000	25.49	25.05	50.54	74.00	-23.46	peak
6	17985.000	22.48	27.35	49.83	74.00	-24.17	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

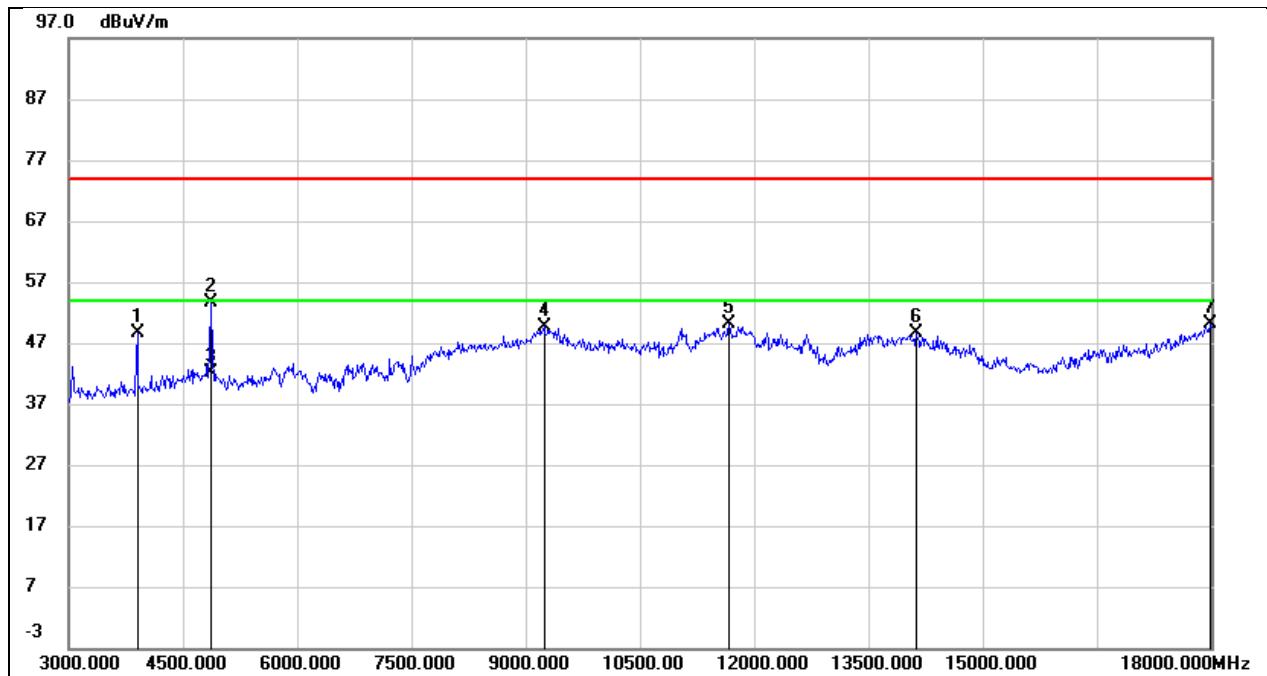


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3900.000	51.20	-2.60	48.60	74.00	-25.40	peak
2	4875.000	52.97	0.65	53.62	74.00	-20.38	peak
3	4875.000	41.44	0.65	42.09	54.00	-11.91	AVG
4	9240.000	38.41	11.25	49.66	74.00	-24.34	peak
5	11670.000	31.74	18.27	50.01	74.00	-23.99	peak
6	14130.000	25.02	23.50	48.52	74.00	-25.48	peak
7	17985.000	20.58	29.49	50.07	74.00	-23.93	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

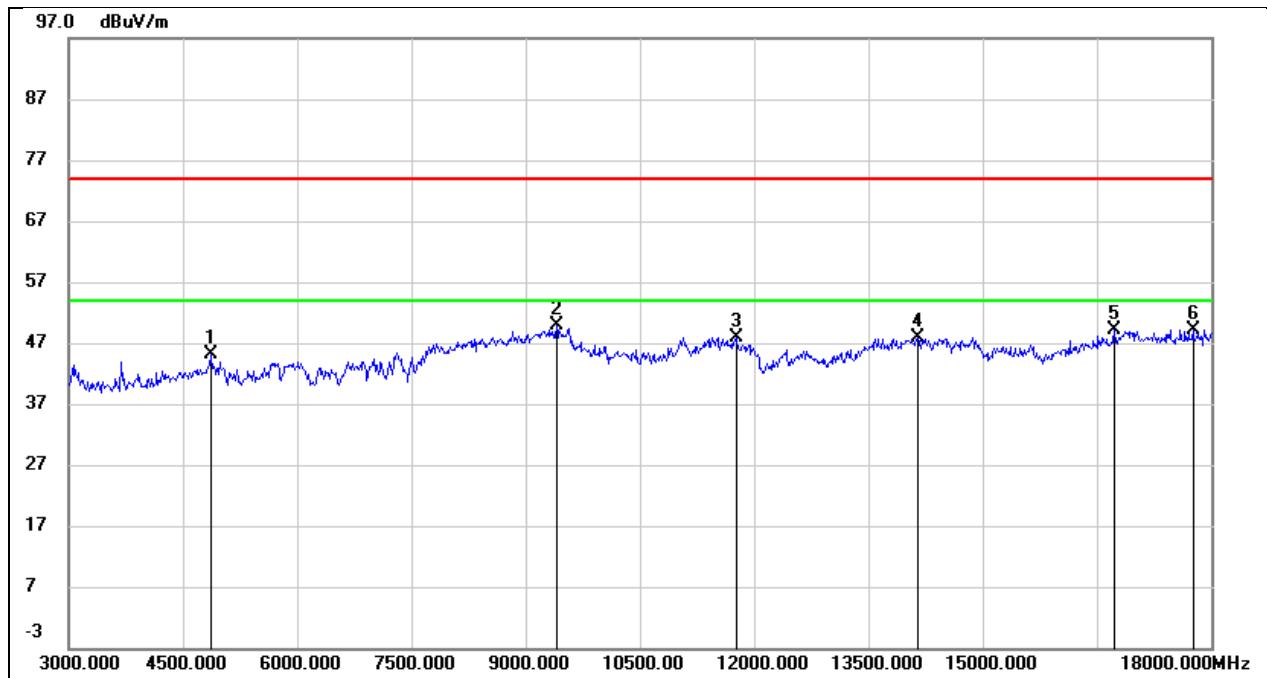


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	43.47	1.73	45.20	74.00	-28.80	peak
2	9405.000	37.74	12.04	49.78	74.00	-24.22	peak
3	11760.000	30.71	17.13	47.84	74.00	-26.16	peak
4	14145.000	25.74	22.24	47.98	74.00	-26.02	peak
5	16725.000	24.44	24.72	49.16	74.00	-24.84	peak
6	17760.000	23.04	26.16	49.20	74.00	-24.80	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3V

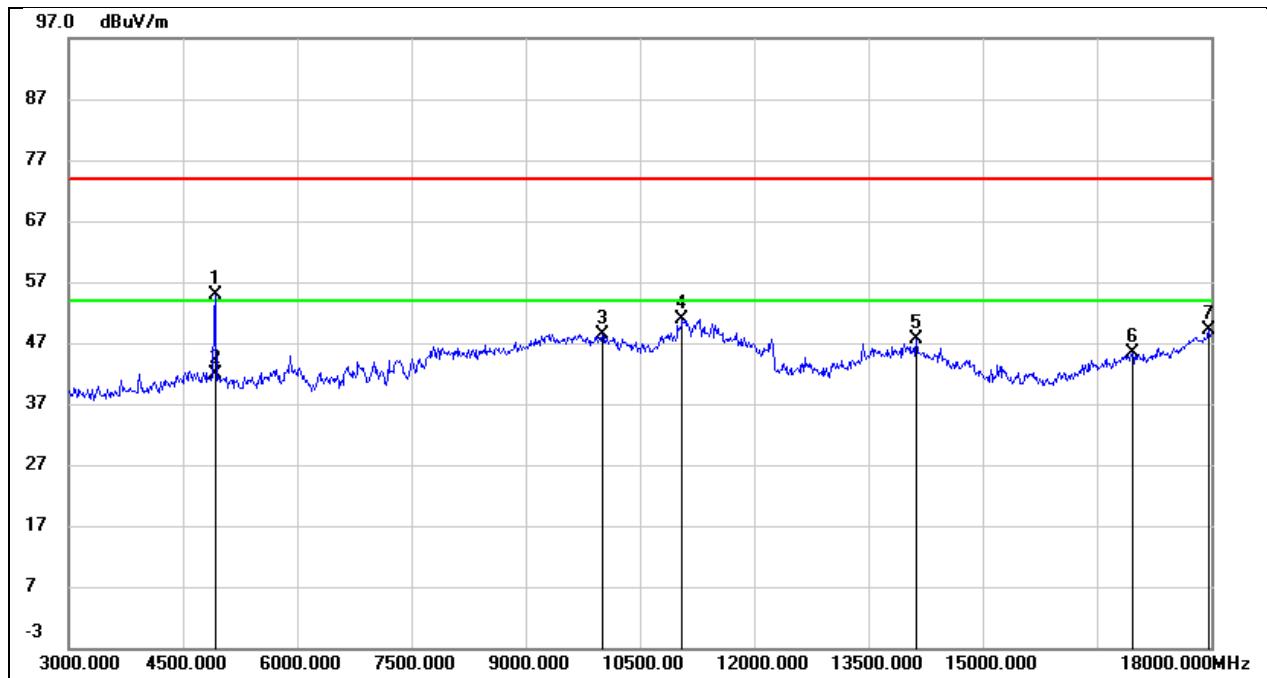


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	54.23	0.76	54.99	74.00	-19.01	peak
2	4920.000	41.24	0.76	42.00	54.00	-12.00	AVG
3	10005.000	35.12	13.33	48.45	74.00	-25.55	peak
4	11055.000	34.68	16.28	50.96	74.00	-23.04	peak
5	14130.000	24.03	23.50	47.53	74.00	-26.47	peak
6	16965.000	21.82	23.44	45.26	74.00	-28.74	peak
7	17970.000	19.87	29.33	49.20	74.00	-24.80	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3V

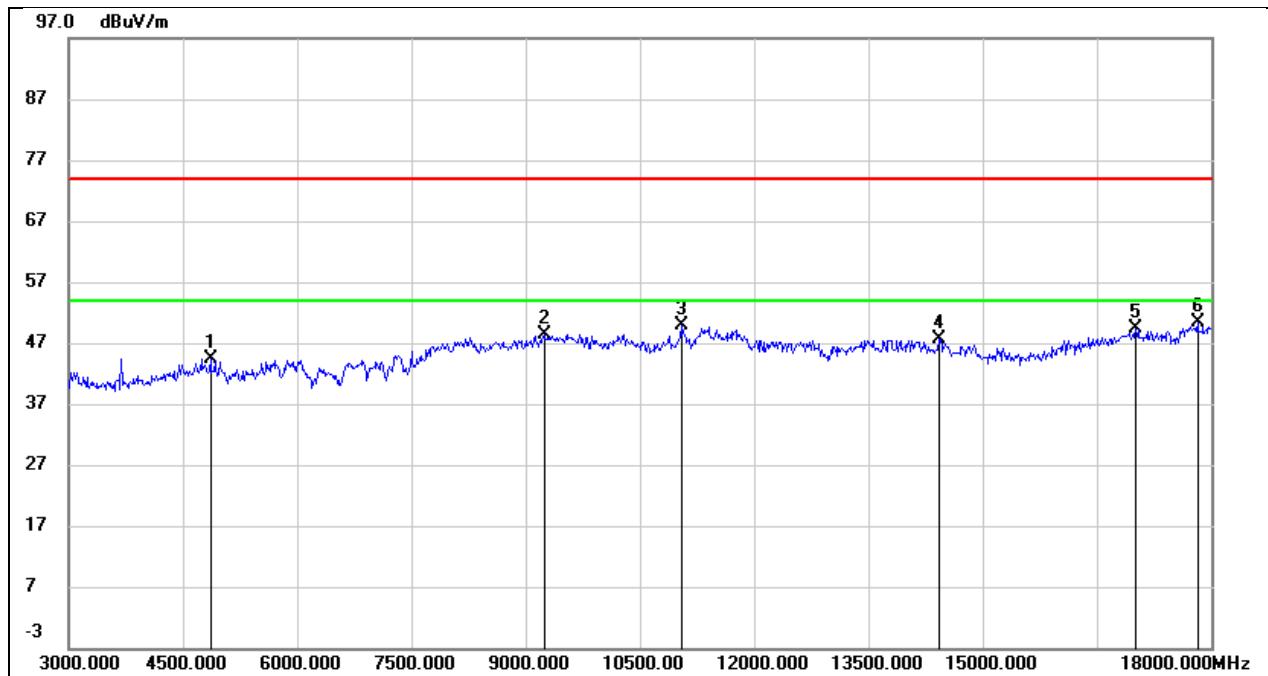


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	42.68	1.73	44.41	74.00	-29.59	peak
2	9240.000	36.88	11.46	48.34	74.00	-25.66	peak
3	11040.000	34.58	15.33	49.91	74.00	-24.09	peak
4	14430.000	26.00	21.68	47.68	74.00	-26.32	peak
5	17010.000	24.19	25.19	49.38	74.00	-24.62	peak
6	17820.000	23.93	26.39	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3V

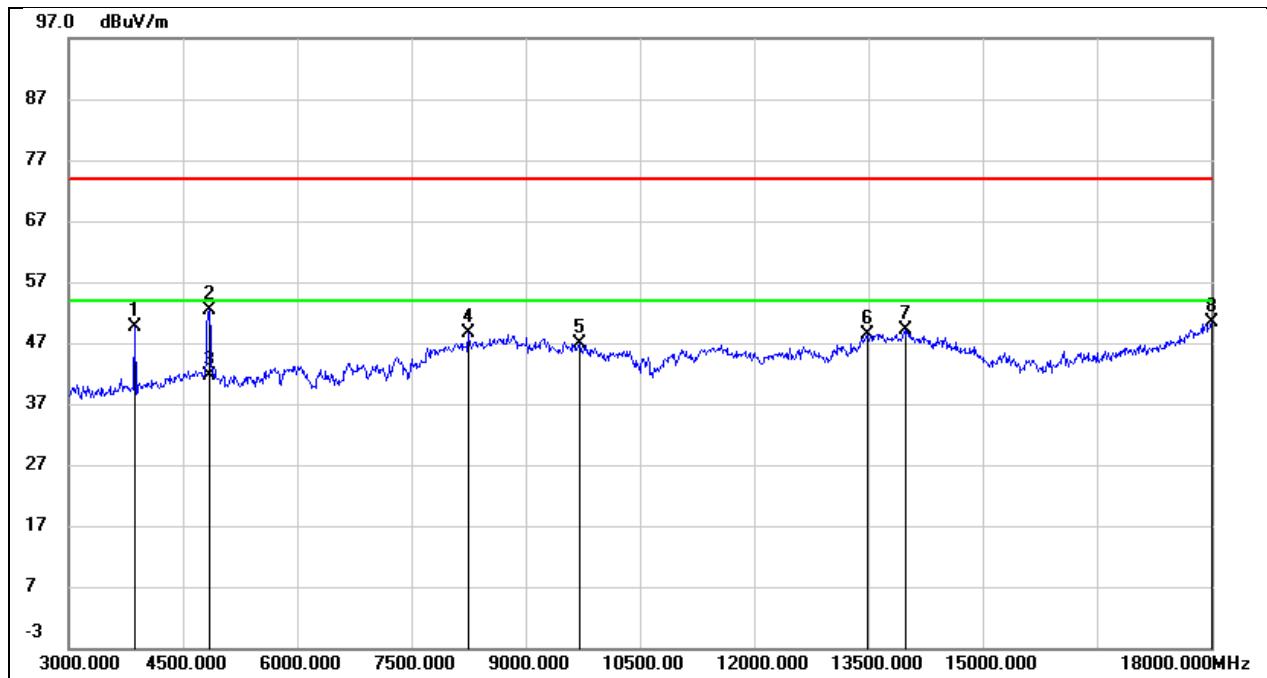


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3870.000	52.36	-2.69	49.67	74.00	-24.33	peak
2	4845.000	51.80	0.58	52.38	74.00	-21.62	peak
3	4845.000	41.08	0.58	41.66	54.00	-12.34	AVG
4	8250.000	40.02	8.63	48.65	74.00	-25.35	peak
5	9705.000	33.83	13.08	46.91	74.00	-27.09	peak
6	13485.000	25.99	22.39	48.38	74.00	-25.62	peak
7	13995.000	25.38	23.78	49.16	74.00	-24.84	peak
8	18000.000	20.86	29.64	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 3.3V

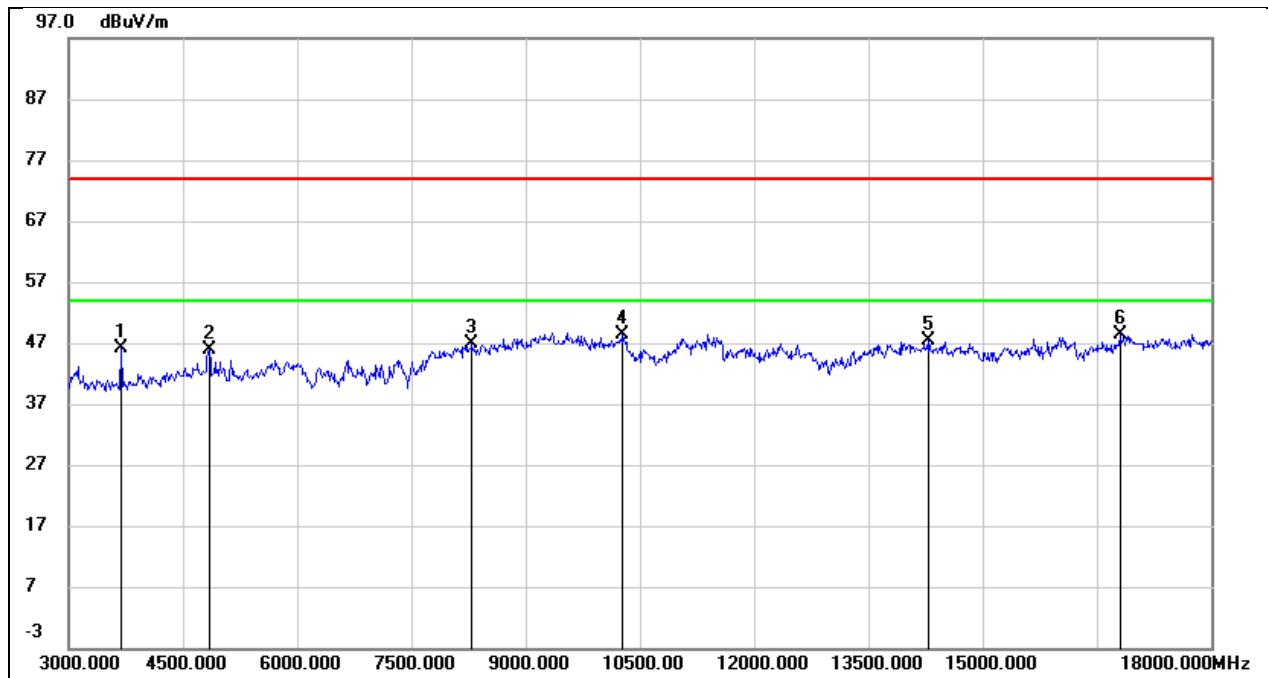


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	48.40	-2.25	46.15	74.00	-27.85	peak
2	4845.000	44.18	1.69	45.87	74.00	-28.13	peak
3	8295.000	37.65	9.26	46.91	74.00	-27.09	peak
4	10275.000	35.50	12.93	48.43	74.00	-25.57	peak
5	14295.000	25.37	22.01	47.38	74.00	-26.62	peak
6	16800.000	23.37	24.93	48.30	74.00	-25.70	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3V

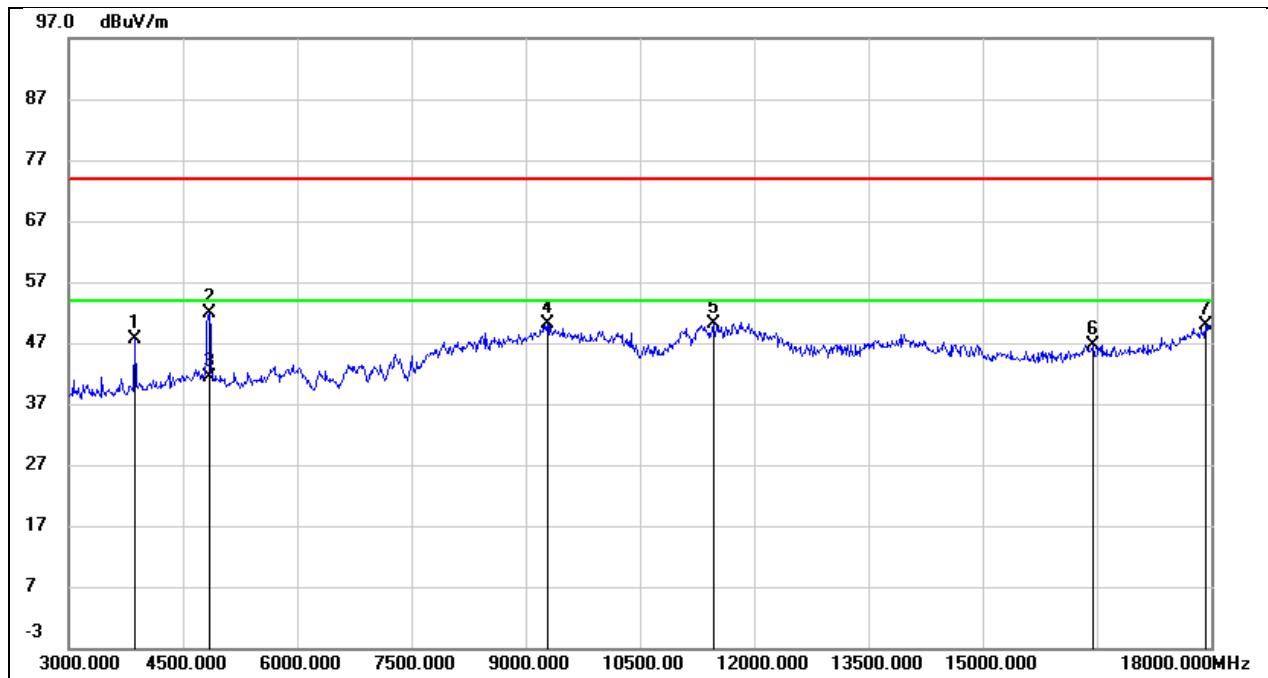


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3870.000	50.29	-2.69	47.60	74.00	-26.40	peak
2	4845.000	51.31	0.58	51.89	74.00	-22.11	peak
3	4845.000	40.88	0.58	41.46	54.00	-12.54	AVG
4	9285.000	38.57	11.45	50.02	74.00	-23.98	peak
5	11460.000	32.27	17.83	50.10	74.00	-23.90	peak
6	16440.000	24.57	22.08	46.65	74.00	-27.35	peak
7	17925.000	21.11	28.87	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3V

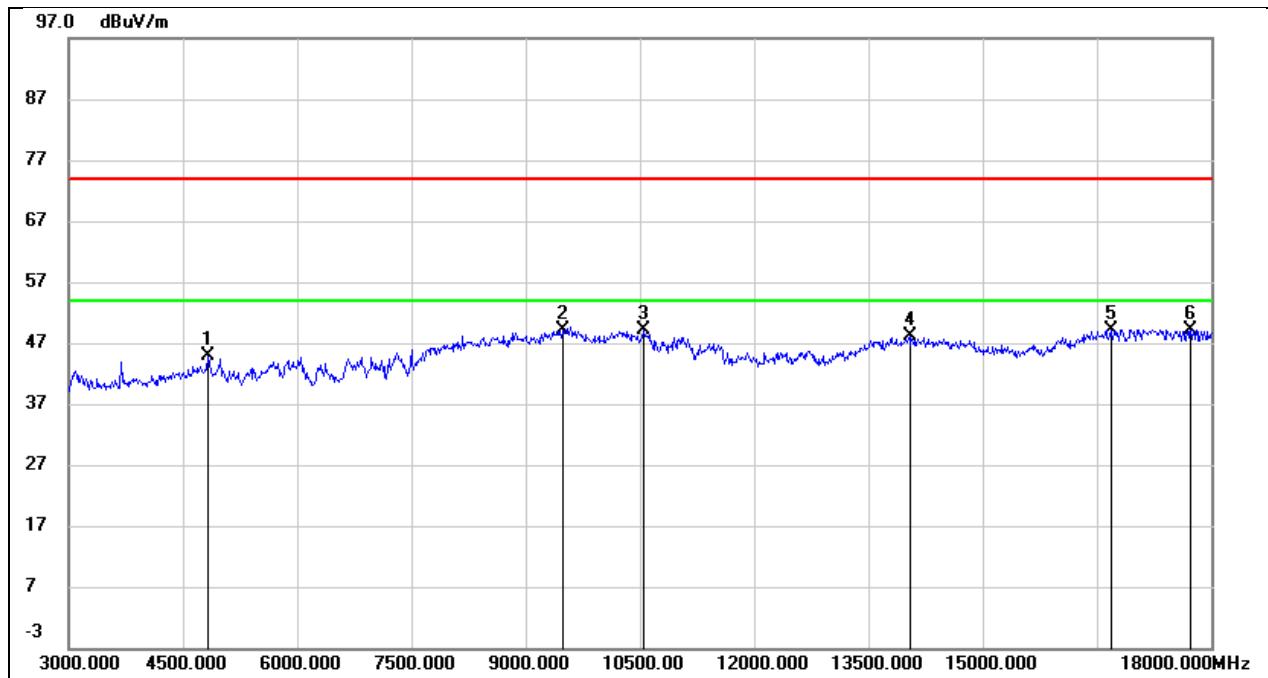


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	43.12	1.64	44.76	74.00	-29.24	peak
2	9495.000	36.63	12.40	49.03	74.00	-24.97	peak
3	10545.000	35.58	13.61	49.19	74.00	-24.81	peak
4	14040.000	25.88	22.21	48.09	74.00	-25.91	peak
5	16680.000	24.61	24.58	49.19	74.00	-24.81	peak
6	17730.000	23.11	26.08	49.19	74.00	-24.81	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3V

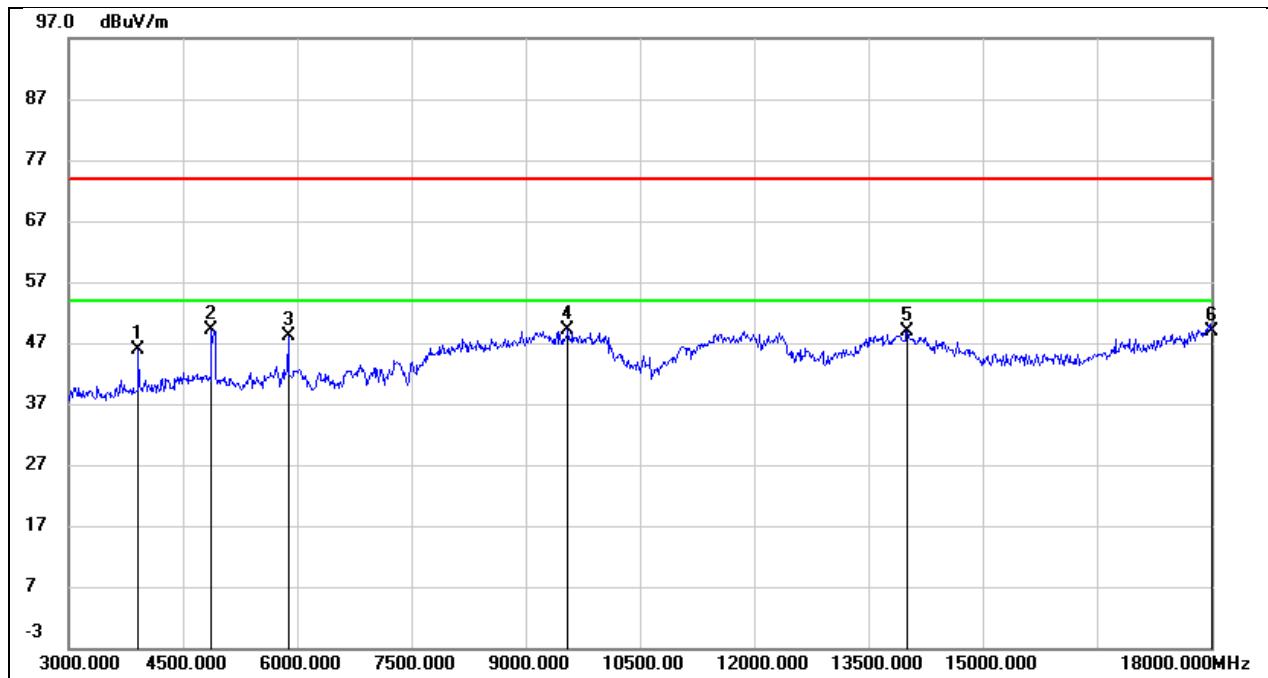

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3915.000	48.34	-2.54	45.80	74.00	-28.20	peak
2	4875.000	48.42	0.65	49.07	74.00	-24.93	peak
3	5880.000	45.24	2.90	48.14	74.00	-25.86	peak
4	9555.000	36.57	12.65	49.22	74.00	-24.78	peak
5	14010.000	25.14	23.78	48.92	74.00	-25.08	peak
6	18000.000	19.22	29.64	48.86	74.00	-25.14	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 3.3V

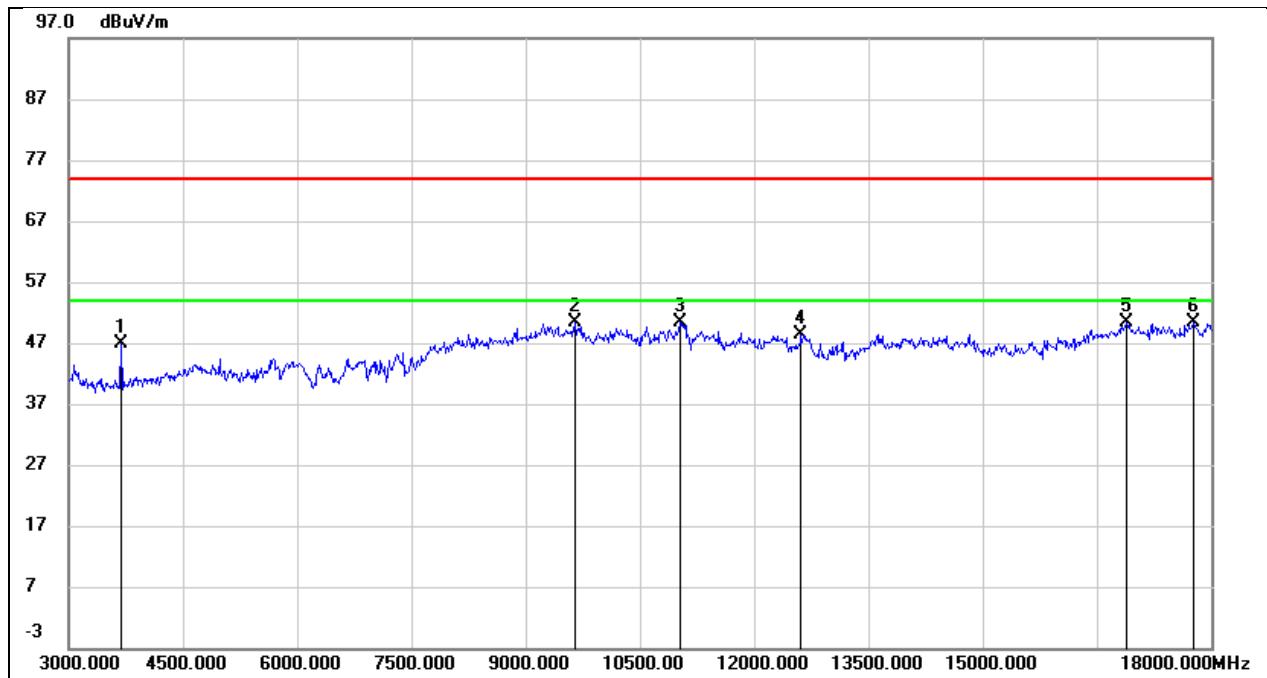

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3690.000	49.06	-2.25	46.81	74.00	-27.19	peak
2	9645.000	37.54	12.73	50.27	74.00	-23.73	peak
3	11025.000	35.17	15.27	50.44	74.00	-23.56	peak
4	12615.000	30.33	18.04	48.37	74.00	-25.63	peak
5	16890.000	25.21	25.05	50.26	74.00	-23.74	peak
6	17775.000	24.12	26.21	50.33	74.00	-23.67	peak


#### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

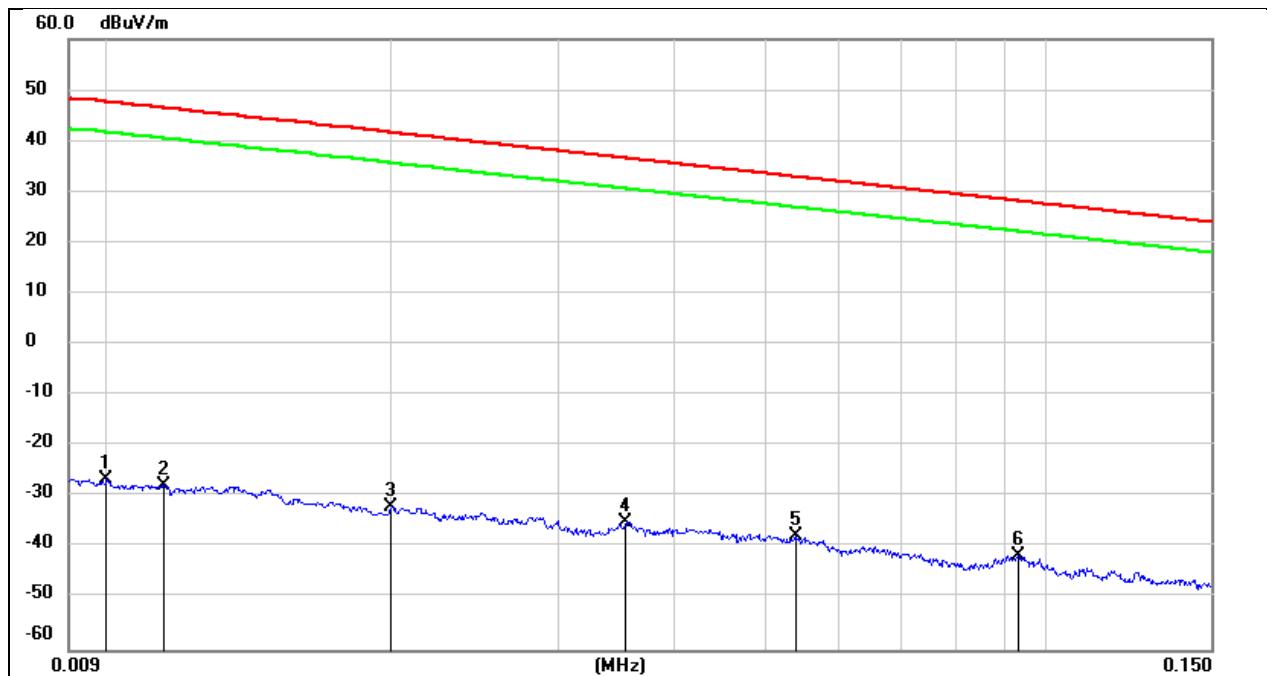


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	74.72	-101.40	-26.68	47.60	-74.28	peak
2	0.0114	73.50	-101.40	-27.90	46.46	-74.36	peak
3	0.0200	69.36	-101.34	-31.98	41.58	-73.56	peak
4	0.0354	66.47	-101.41	-34.94	36.62	-71.56	peak
5	0.0539	63.76	-101.50	-37.74	32.97	-70.71	peak
6	0.0932	60.29	-101.74	-41.45	28.21	-69.66	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

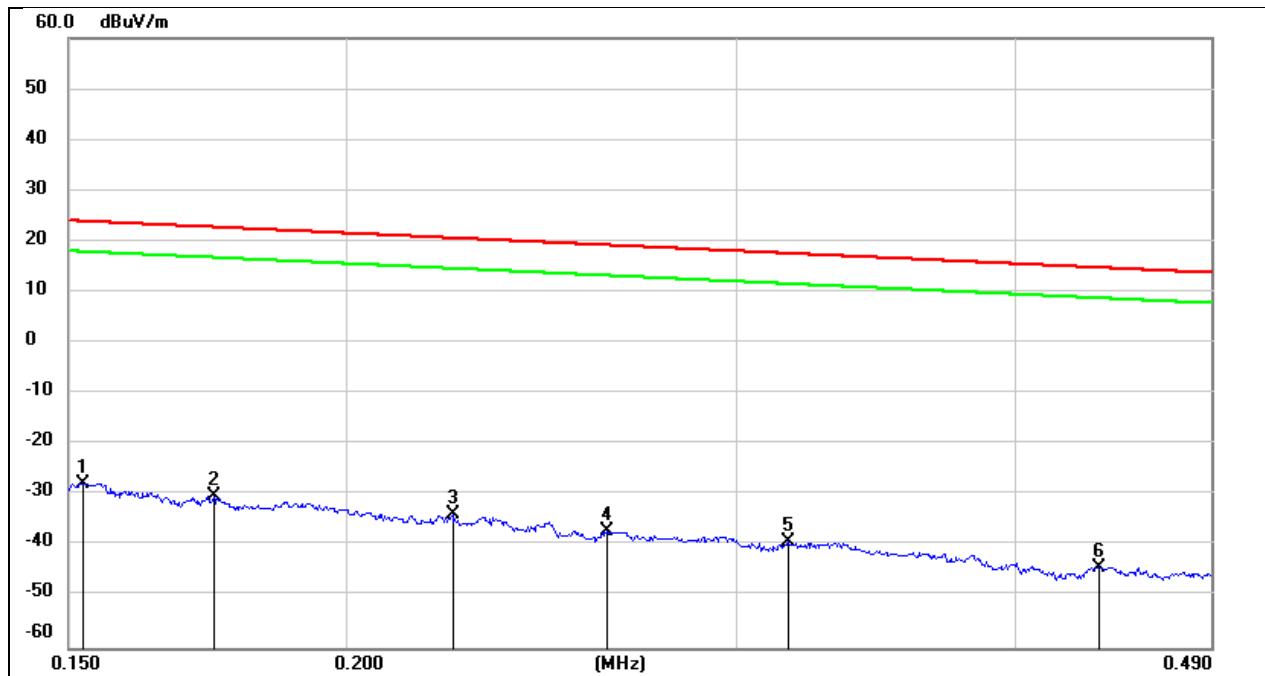

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1524	73.80	-101.63	-27.83	23.94	-51.77	peak
2	0.1743	71.66	-101.67	-30.01	22.78	-52.79	peak
3	0.2232	67.89	-101.75	-33.86	20.63	-54.49	peak
4	0.2620	64.81	-101.81	-37.00	19.24	-56.24	peak
5	0.3163	62.70	-101.87	-39.17	17.60	-56.77	peak
6	0.4364	57.86	-101.99	-44.13	14.80	-58.93	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

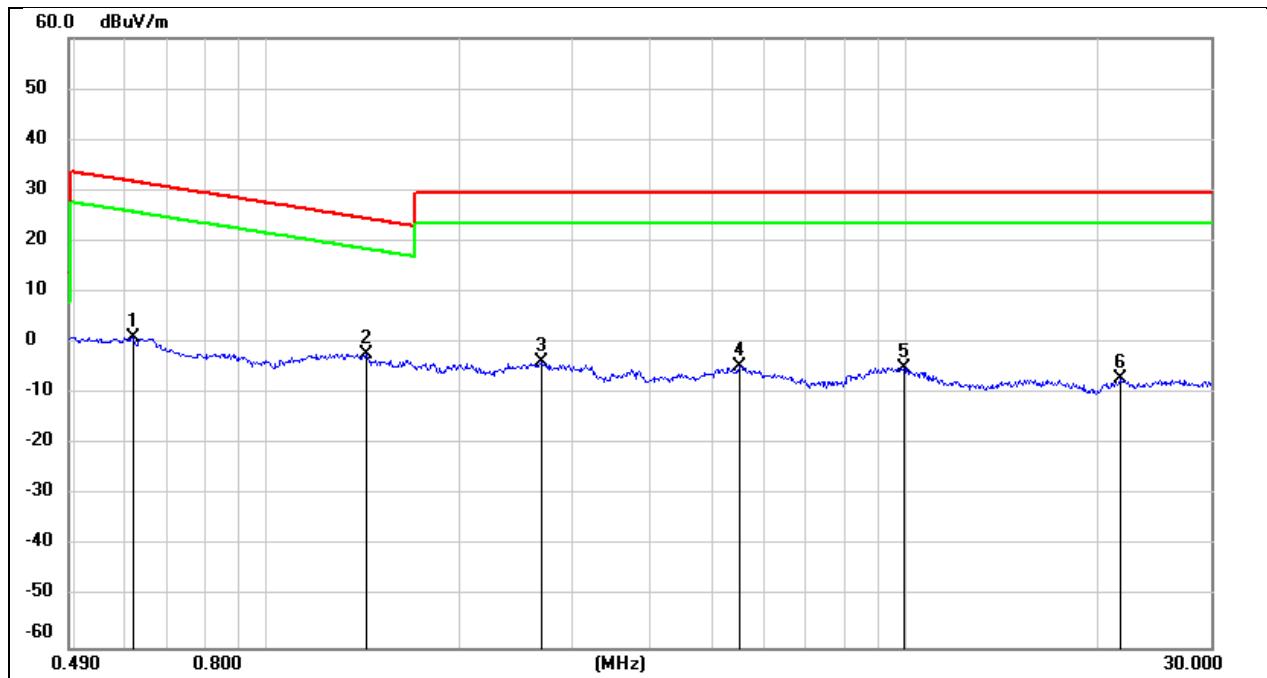

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6169	63.05	-62.08	0.97	31.80	-30.83	peak
2	1.4274	59.88	-62.08	-2.20	24.51	-26.71	peak
3	2.6913	57.80	-61.65	-3.85	29.54	-33.39	peak
4	5.5066	56.89	-61.42	-4.53	29.54	-34.07	peak
5	9.9329	55.99	-60.81	-4.82	29.54	-34.36	peak
6	21.6487	53.54	-60.71	-7.17	29.54	-36.71	peak


## 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

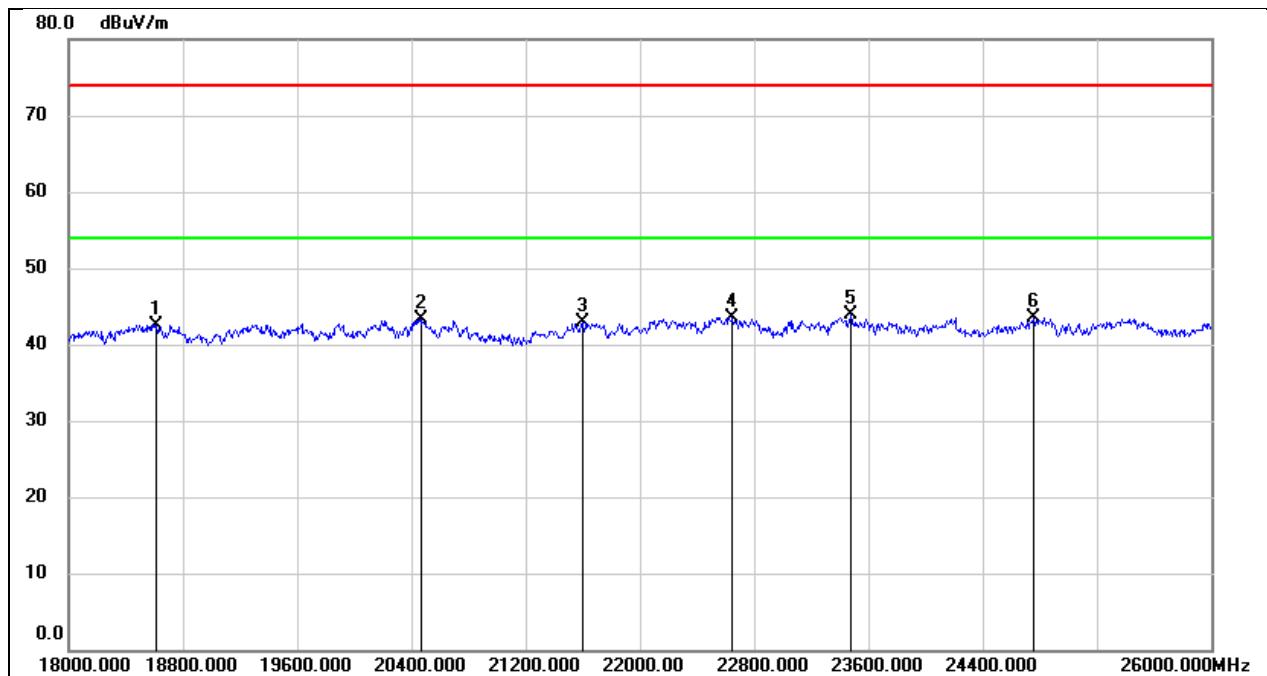

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	47.83	-5.34	42.49	74.00	-31.51	peak
2	20472.000	48.69	-5.39	43.30	74.00	-30.70	peak
3	21600.000	47.52	-4.54	42.98	74.00	-31.02	peak
4	22648.000	47.26	-3.77	43.49	74.00	-30.51	peak
5	23480.000	47.04	-3.16	43.88	74.00	-30.12	peak
6	24760.000	45.79	-2.32	43.47	74.00	-30.53	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

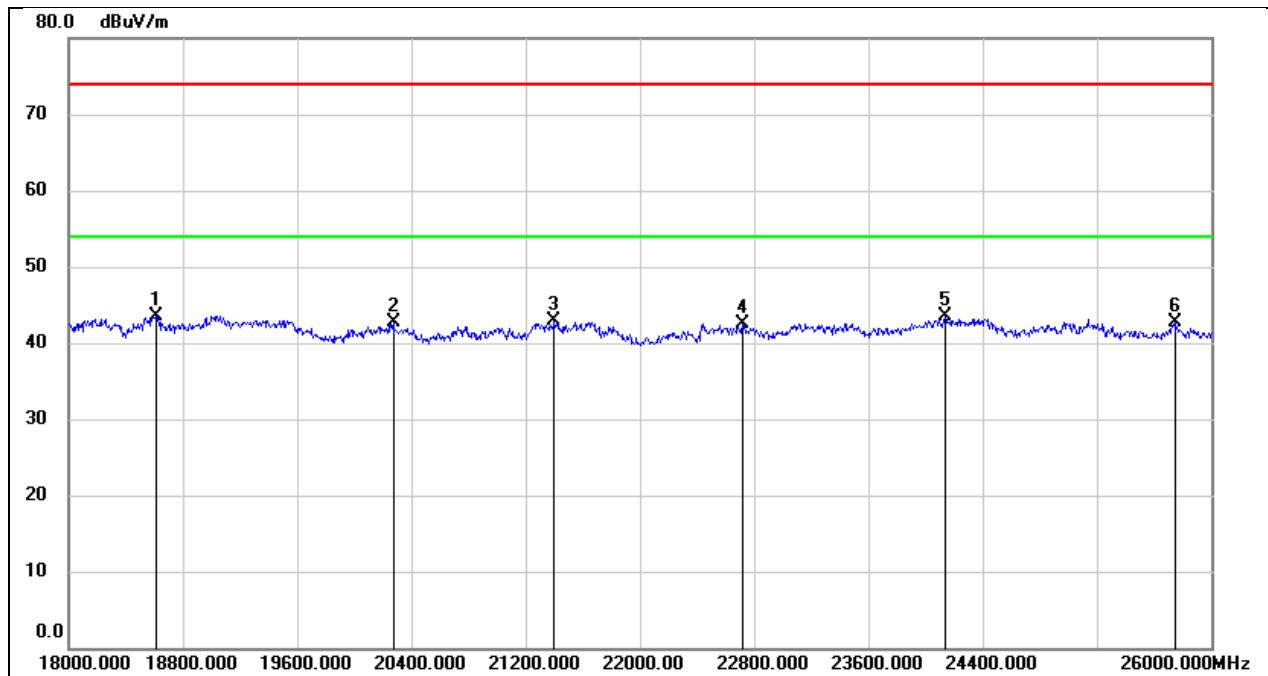

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	48.89	-5.34	43.55	74.00	-30.45	peak
2	20272.000	48.27	-5.60	42.67	74.00	-31.33	peak
3	21400.000	47.54	-4.72	42.82	74.00	-31.18	peak
4	22720.000	46.23	-3.71	42.52	74.00	-31.48	peak
5	24136.000	46.27	-2.79	43.48	74.00	-30.52	peak
6	25744.000	43.30	-0.64	42.66	74.00	-31.34	peak


## 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

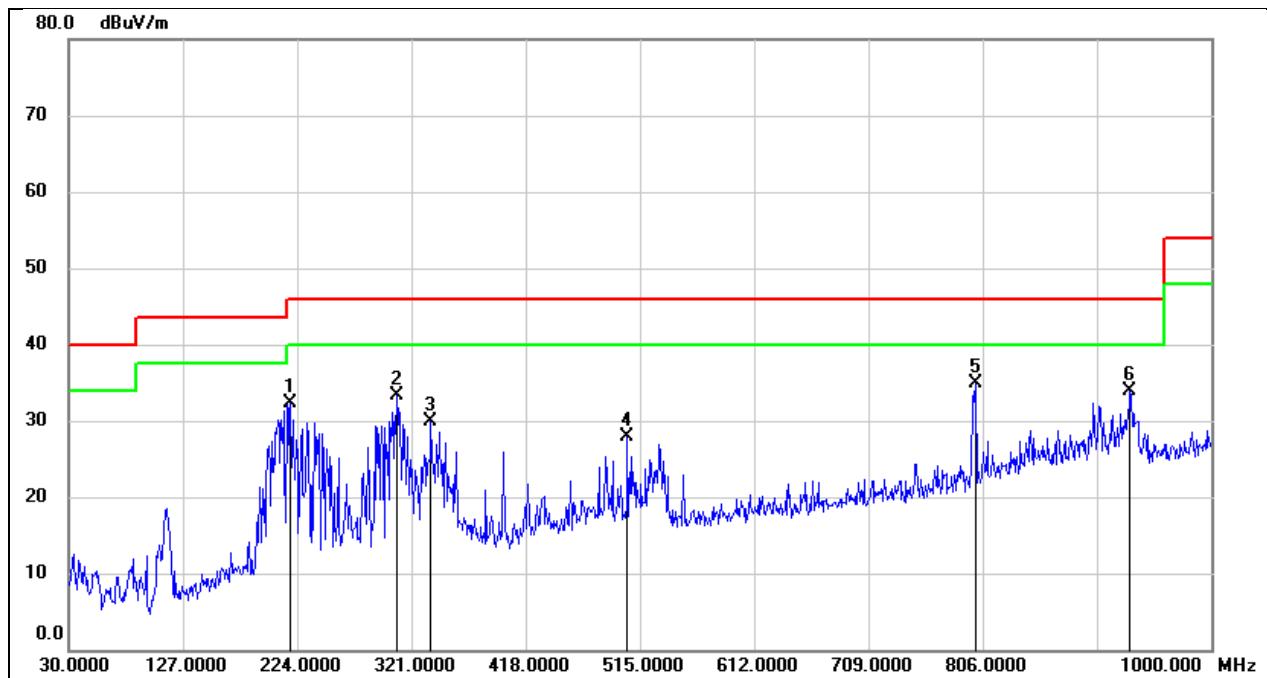

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	218.1800	45.35	-13.02	32.33	46.00	-13.67	QP
2	308.3900	44.50	-11.18	33.32	46.00	-12.68	QP
3	337.4900	39.95	-10.03	29.92	46.00	-16.08	QP
4	504.3300	35.53	-7.63	27.90	46.00	-18.10	QP
5	800.1800	37.44	-2.62	34.82	46.00	-11.18	QP
6	931.1300	34.49	-0.68	33.81	46.00	-12.19	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

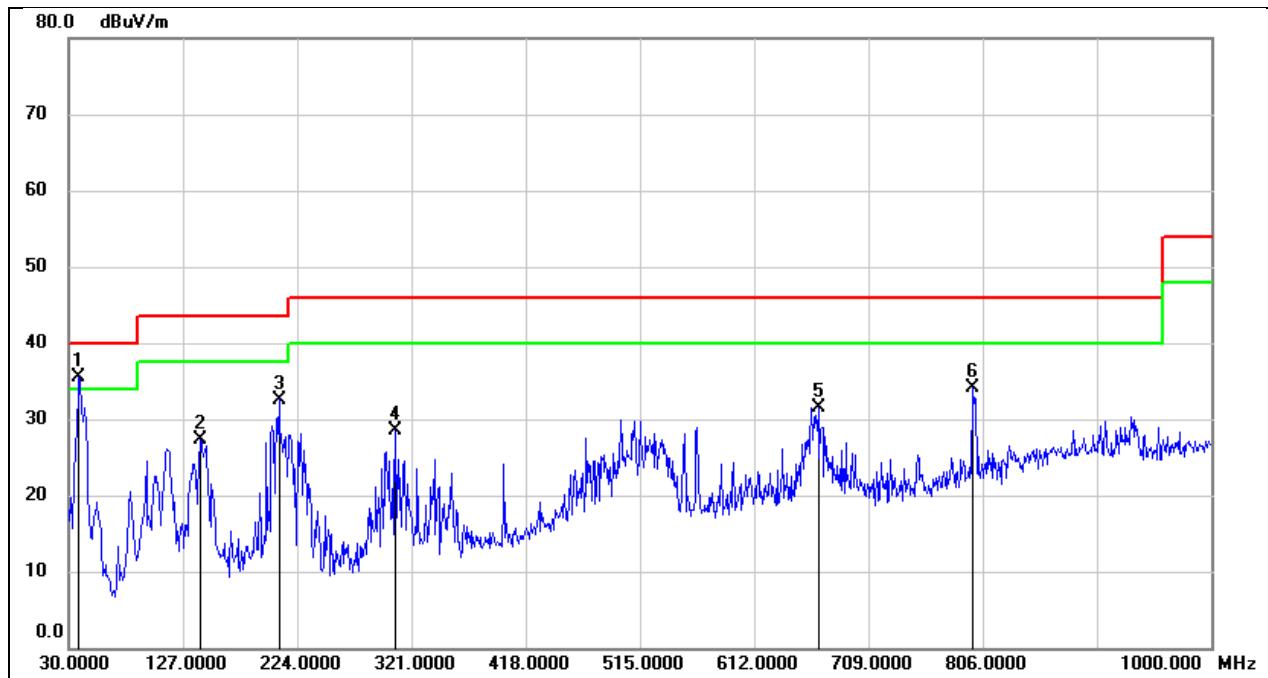

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	50.28	-14.69	35.59	40.00	-4.41	QP
2	141.5500	41.16	-13.90	27.26	43.50	-16.24	QP
3	208.4800	45.24	-12.64	32.60	43.50	-10.90	QP
4	307.4200	39.74	-11.22	28.52	46.00	-17.48	QP
5	666.3200	36.72	-5.15	31.57	46.00	-14.43	QP
6	797.2700	36.76	-2.68	34.08	46.00	-11.92	QP

## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a)


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

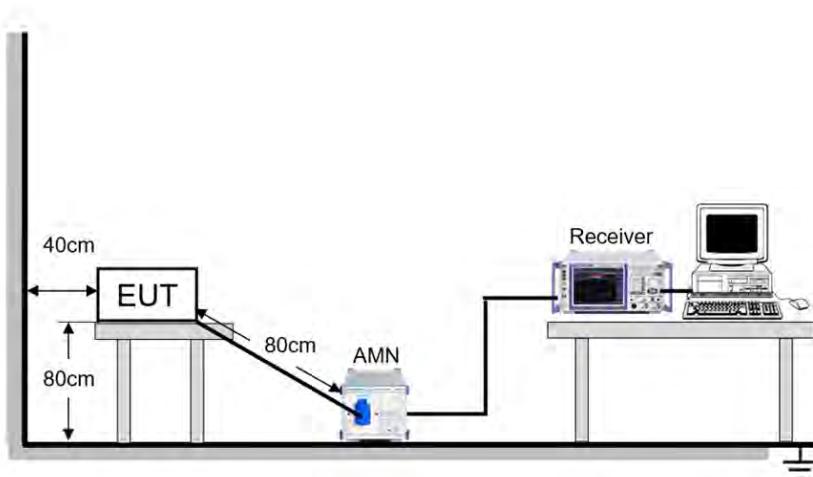

**TEST ENVIRONMENT**


Temperature	22.3°C	Relative Humidity	57.1%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 3, 2025	Test By	Deacon Tan
-----------	---------------	---------	------------

**TEST RESULTS**

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

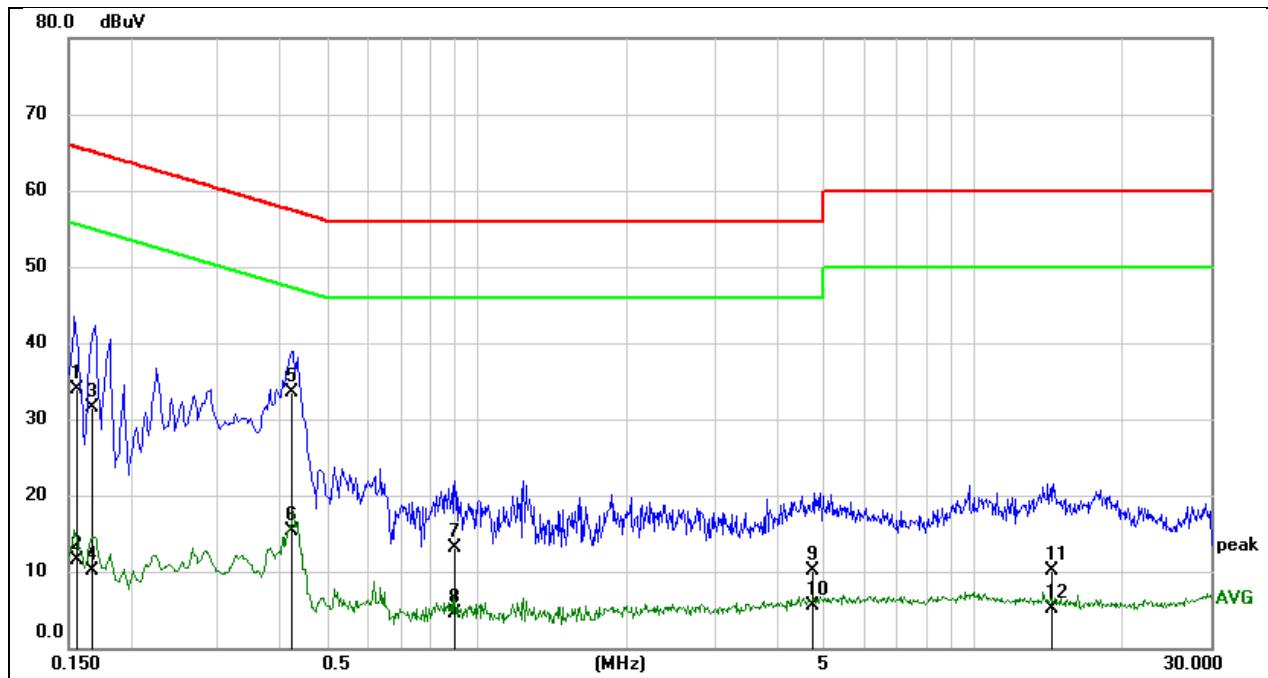


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1563	24.22	9.64	33.86	65.66	-31.80	QP
2	0.1563	1.87	9.64	11.51	55.66	-44.15	AVG
3	0.1664	21.88	9.64	31.52	65.14	-33.62	QP
4	0.1664	0.42	9.64	10.06	55.14	-45.08	AVG
5	0.4235	23.79	9.64	33.43	57.38	-23.95	QP
6	0.4235	5.74	9.64	15.38	47.38	-32.00	AVG
7	0.9024	3.55	9.63	13.18	56.00	-42.82	QP
8	0.9024	-5.16	9.63	4.47	46.00	-41.53	AVG
9	4.7189	0.36	9.65	10.01	56.00	-45.99	QP
10	4.7189	-4.13	9.65	5.52	46.00	-40.48	AVG
11	14.3971	0.44	9.74	10.18	60.00	-49.82	QP
12	14.3971	-4.59	9.74	5.15	50.00	-44.85	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

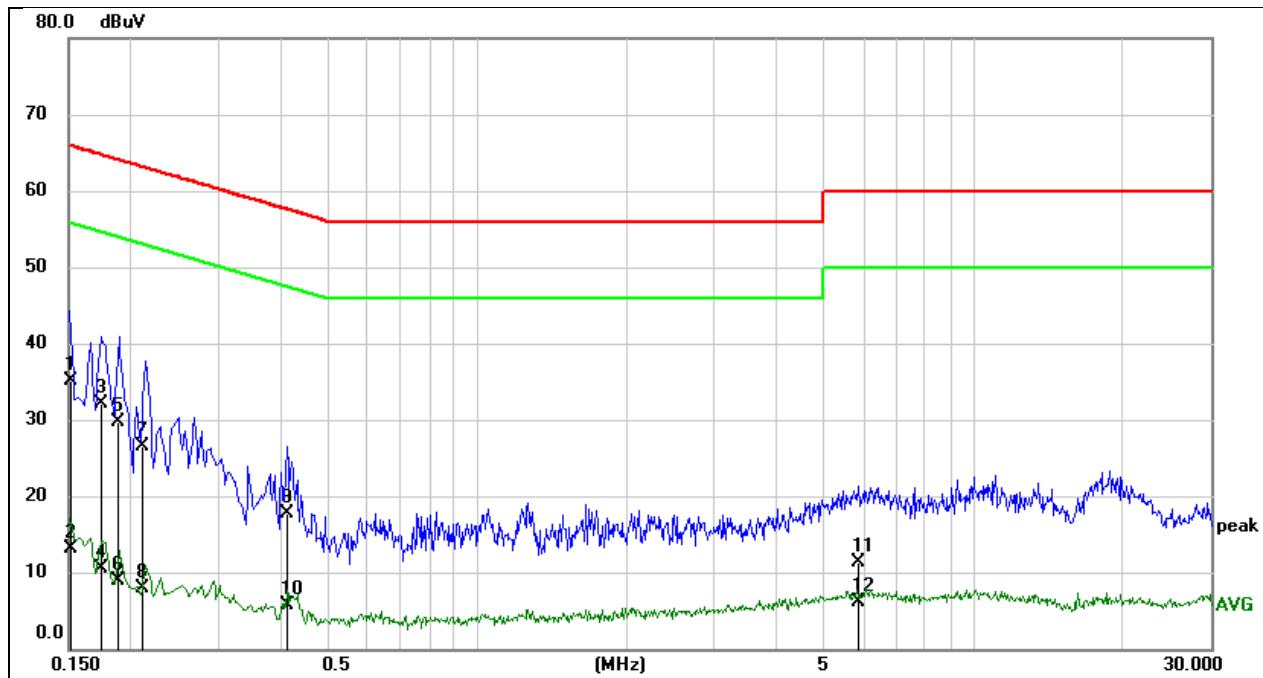

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	25.29	9.74	35.03	65.88	-30.85	QP
2	0.1522	3.31	9.74	13.05	55.88	-42.83	AVG
3	0.1749	22.44	9.69	32.13	64.72	-32.59	QP
4	0.1749	0.90	9.69	10.59	54.72	-44.13	AVG
5	0.1884	20.00	9.66	29.66	64.11	-34.45	QP
6	0.1884	-0.72	9.66	8.94	54.11	-45.17	AVG
7	0.2115	16.96	9.64	26.60	63.15	-36.55	QP
8	0.2115	-1.78	9.64	7.86	53.15	-45.29	AVG
9	0.4146	8.01	9.64	17.65	57.56	-39.91	QP
10	0.4146	-3.92	9.64	5.72	47.56	-41.84	AVG
11	5.8543	1.59	9.73	11.32	60.00	-48.68	QP
12	5.8543	-3.61	9.73	6.12	50.00	-43.88	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 11. TEST DATA

### 11.1. APPENDIX A: DTS BANDWIDTH


#### 11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.040	2407.040	2416.080	$\geq 0.5$	PASS
		2437	8.600	2432.480	2441.080	$\geq 0.5$	PASS
		2462	9.560	2457.000	2466.560	$\geq 0.5$	PASS
11G	Ant1	2412	16.280	2403.880	2420.160	$\geq 0.5$	PASS
		2437	15.280	2429.280	2444.560	$\geq 0.5$	PASS
		2462	14.800	2455.120	2469.920	$\geq 0.5$	PASS
11N20SISO	Ant1	2412	16.280	2403.880	2420.160	$\geq 0.5$	PASS
		2437	17.120	2428.400	2445.520	$\geq 0.5$	PASS
		2462	15.400	2454.480	2469.880	$\geq 0.5$	PASS
11N40SISO	Ant1	2422	33.200	2404.480	2437.680	$\geq 0.5$	PASS
		2437	32.560	2421.960	2454.520	$\geq 0.5$	PASS
		2452	35.440	2434.160	2469.600	$\geq 0.5$	PASS
11AX20SISO	Ant1	2412	14.600	2403.480	2418.080	$\geq 0.5$	PASS
		2437	17.440	2428.600	2446.040	$\geq 0.5$	PASS
		2462	16.360	2453.240	2469.600	$\geq 0.5$	PASS
11AX40SISO	Ant1	2422	36.320	2403.200	2439.520	$\geq 0.5$	PASS
		2437	36.560	2418.200	2454.760	$\geq 0.5$	PASS
		2452	32.240	2435.680	2467.920	$\geq 0.5$	PASS

## 11.1.2. Test Graphs





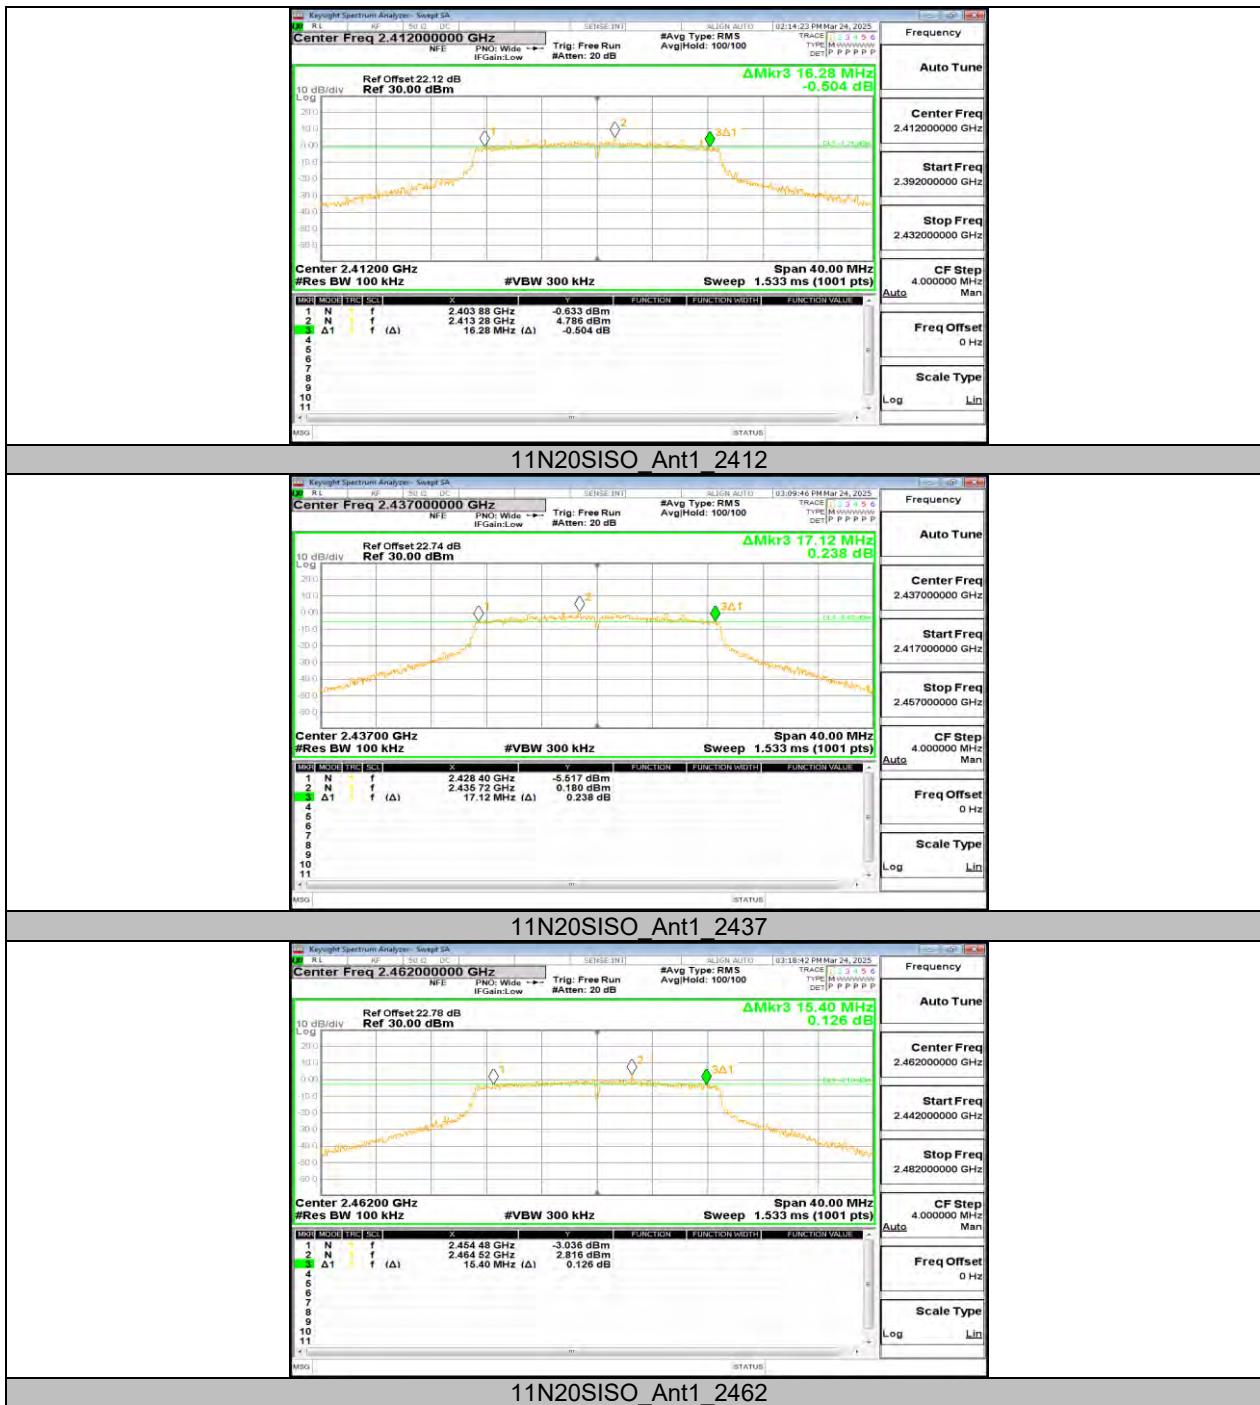







## 11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

### 11.2.1. Test Result


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	Ant1	2412	15.016	2404.5786	2419.5946
		2437	15.044	2429.5787	2444.6227
		2462	15.056	2454.5495	2469.6055
11G	Ant1	2412	17.367	2403.3063	2420.6733
		2437	17.093	2428.4307	2445.5237
		2462	17.193	2453.4365	2470.6295
11N20SISO	Ant1	2412	18.318	2402.7984	2421.1164
		2437	18.374	2427.8252	2446.1992
		2462	18.316	2452.8632	2471.1792
11N40SISO	Ant1	2422	36.501	2403.9051	2440.4061
		2437	36.269	2418.9516	2455.2206
		2452	36.486	2433.7800	2470.2660
11AX20SISO	Ant1	2412	19.149	2402.4720	2421.6210
		2437	19.135	2427.4835	2446.6185
		2462	19.075	2452.4684	2471.5434
11AX40SISO	Ant1	2422	37.816	2403.1153	2440.9313
		2437	37.779	2418.1464	2455.9254
		2452	37.789	2433.1425	2470.9315

## 11.2.2. Test Graphs







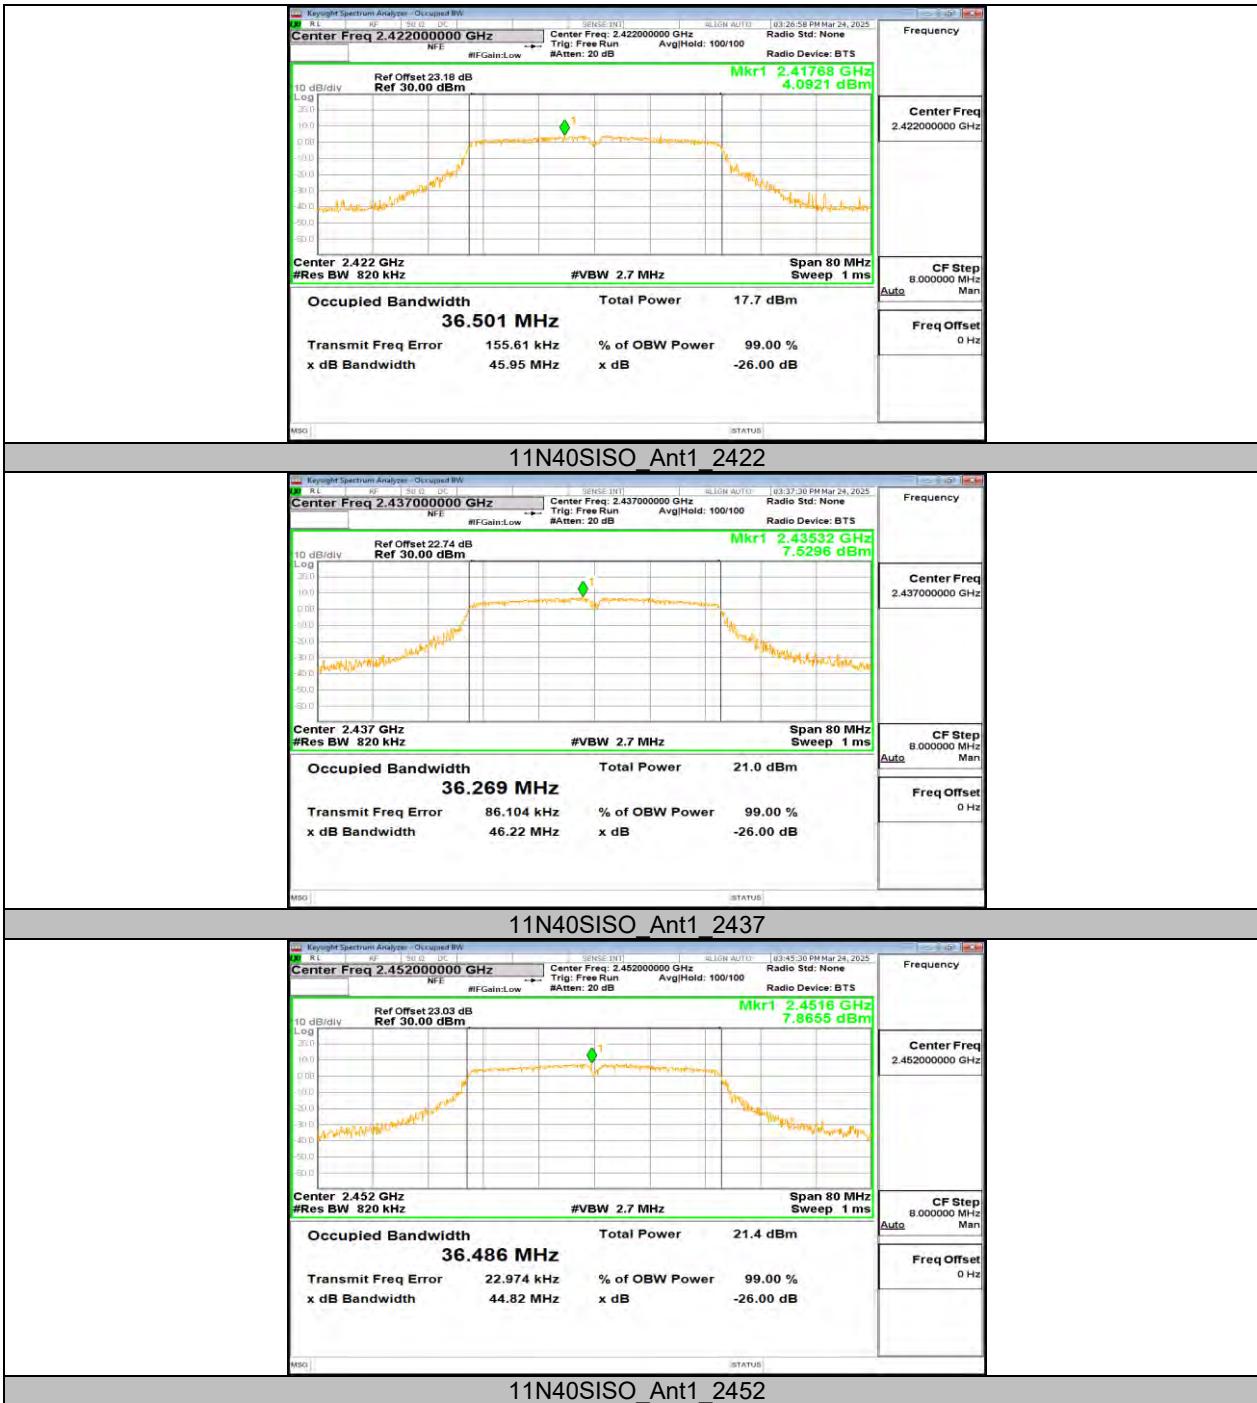





## 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

### 11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.90	≤30.00	PASS
		2437	14.45	≤30.00	PASS
		2462	13.95	≤30.00	PASS
11G	Ant1	2412	13.55	≤30.00	PASS
		2437	13.66	≤30.00	PASS
		2462	13.83	≤30.00	PASS
11N20SISO	Ant1	2412	12.42	≤30.00	PASS
		2437	12.74	≤30.00	PASS
		2462	12.95	≤30.00	PASS
11N40SISO	Ant1	2422	14.57	≤30.00	PASS
		2437	14.63	≤30.00	PASS
		2452	14.26	≤30.00	PASS
11AX20SISO	Ant1	2412	12.90	≤30.00	PASS
		2437	12.51	≤30.00	PASS
		2462	12.52	≤30.00	PASS
11AX40SISO	Ant1	2422	13.43	≤30.00	PASS
		2437	13.25	≤30.00	PASS
		2452	13.16	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.


## 11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY


### 11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-16.50	≤8.00	PASS
		2437	-17.26	≤8.00	PASS
		2462	-17.92	≤8.00	PASS
11G	Ant1	2412	-19.49	≤8.00	PASS
		2437	-19.20	≤8.00	PASS
		2462	-15.06	≤8.00	PASS
11N20SISO	Ant1	2412	-21.32	≤8.00	PASS
		2437	-20.05	≤8.00	PASS
		2462	-20.17	≤8.00	PASS
11N40SISO	Ant1	2422	-19.74	≤8.00	PASS
		2437	-19.74	≤8.00	PASS
		2452	-16.29	≤8.00	PASS
11AX20SISO	Ant1	2412	-18.74	≤8.00	PASS
		2437	-18.92	≤8.00	PASS
		2462	-19.61	≤8.00	PASS
11AX40SISO	Ant1	2422	-21.87	≤8.00	PASS
		2437	-22.33	≤8.00	PASS
		2452	-21.87	≤8.00	PASS


Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.


## 11.4.2. Test Graphs

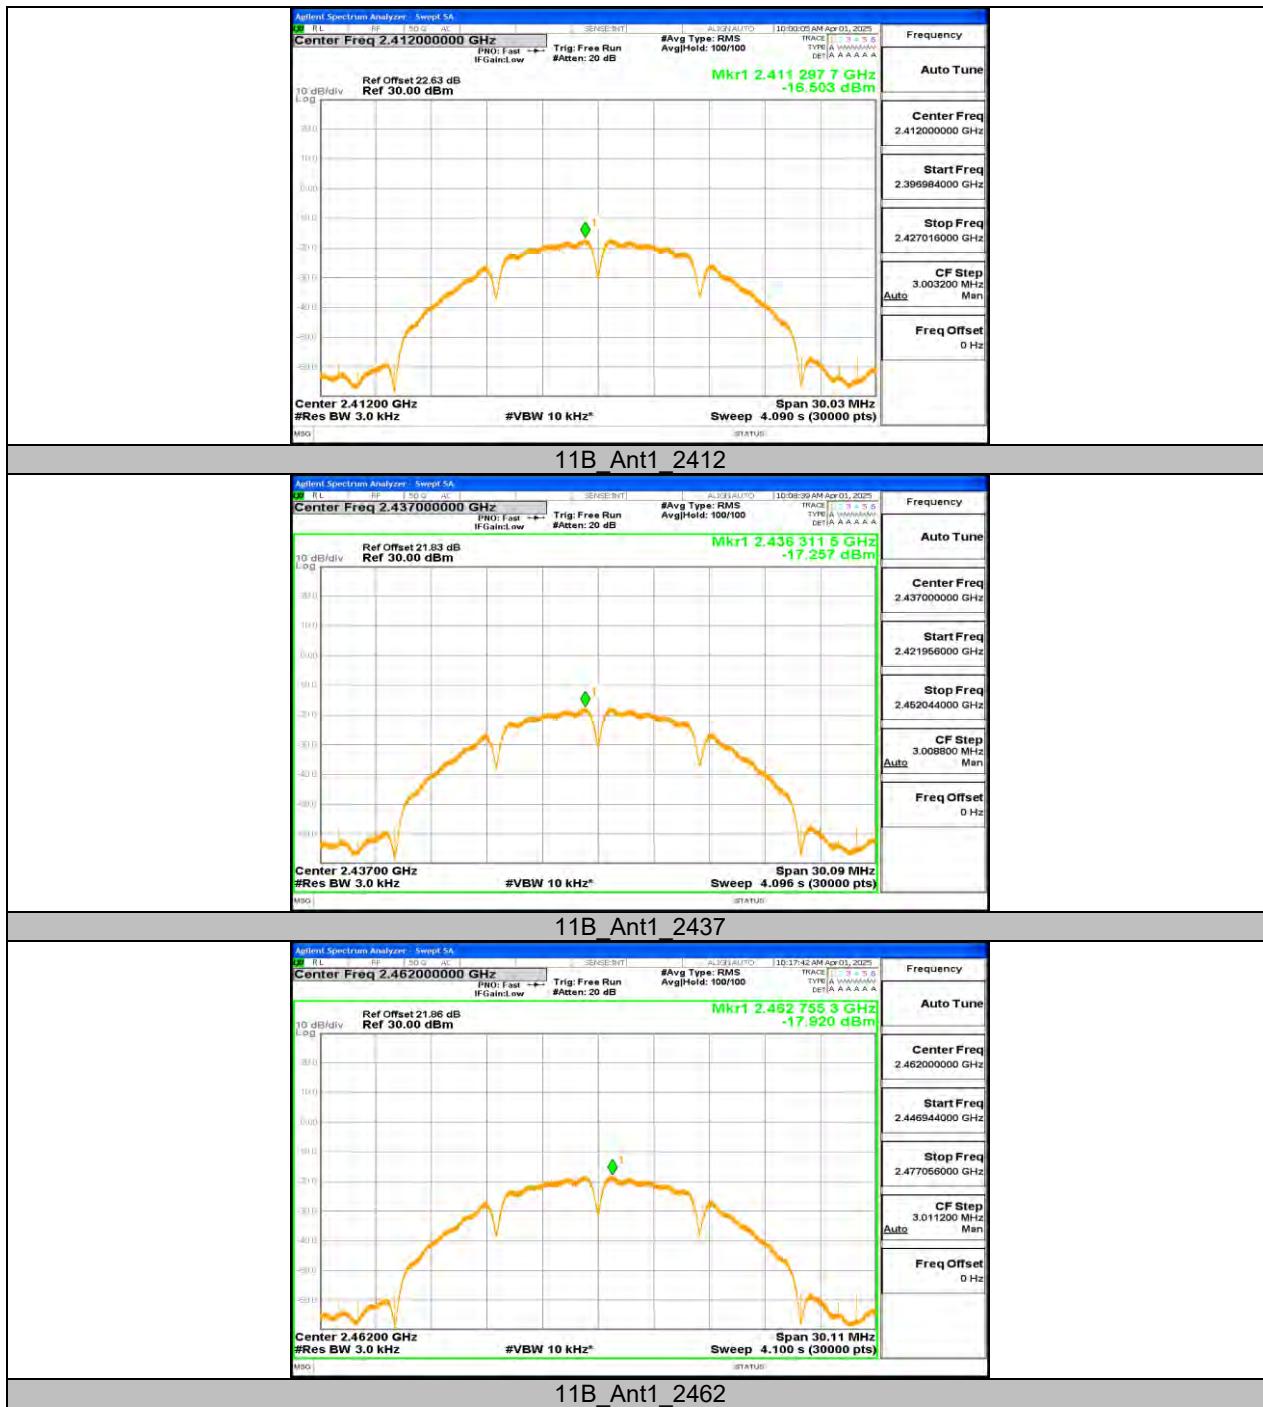


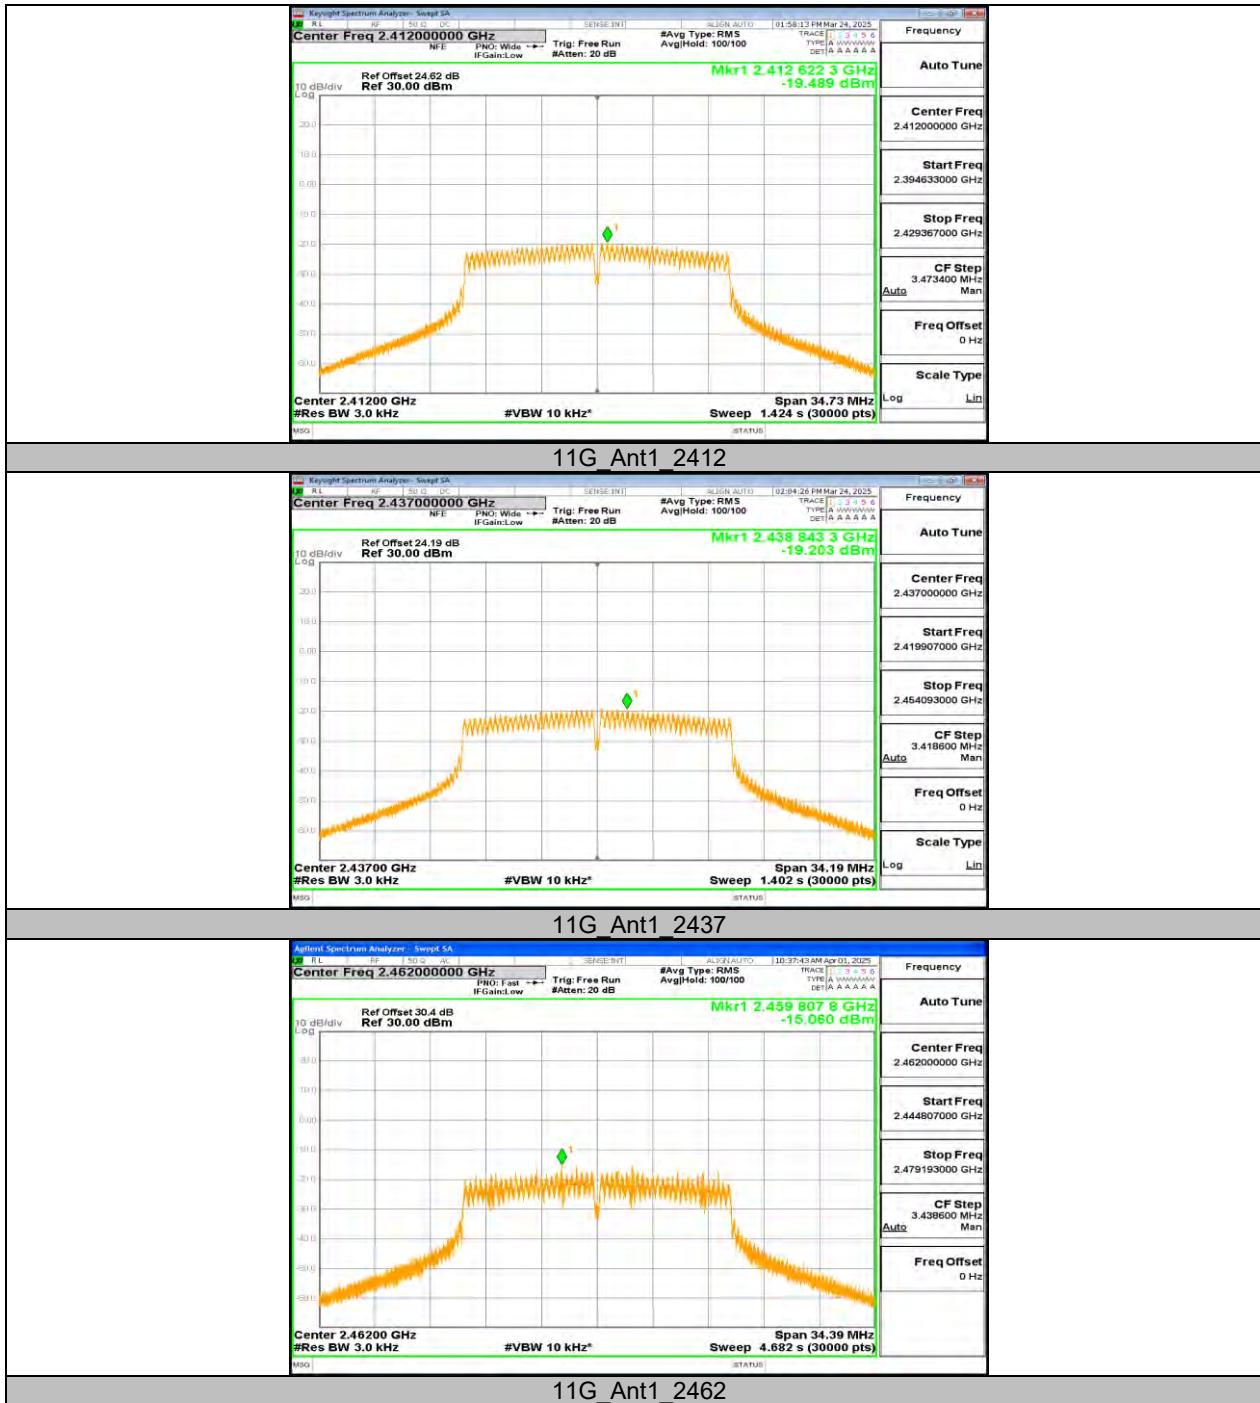

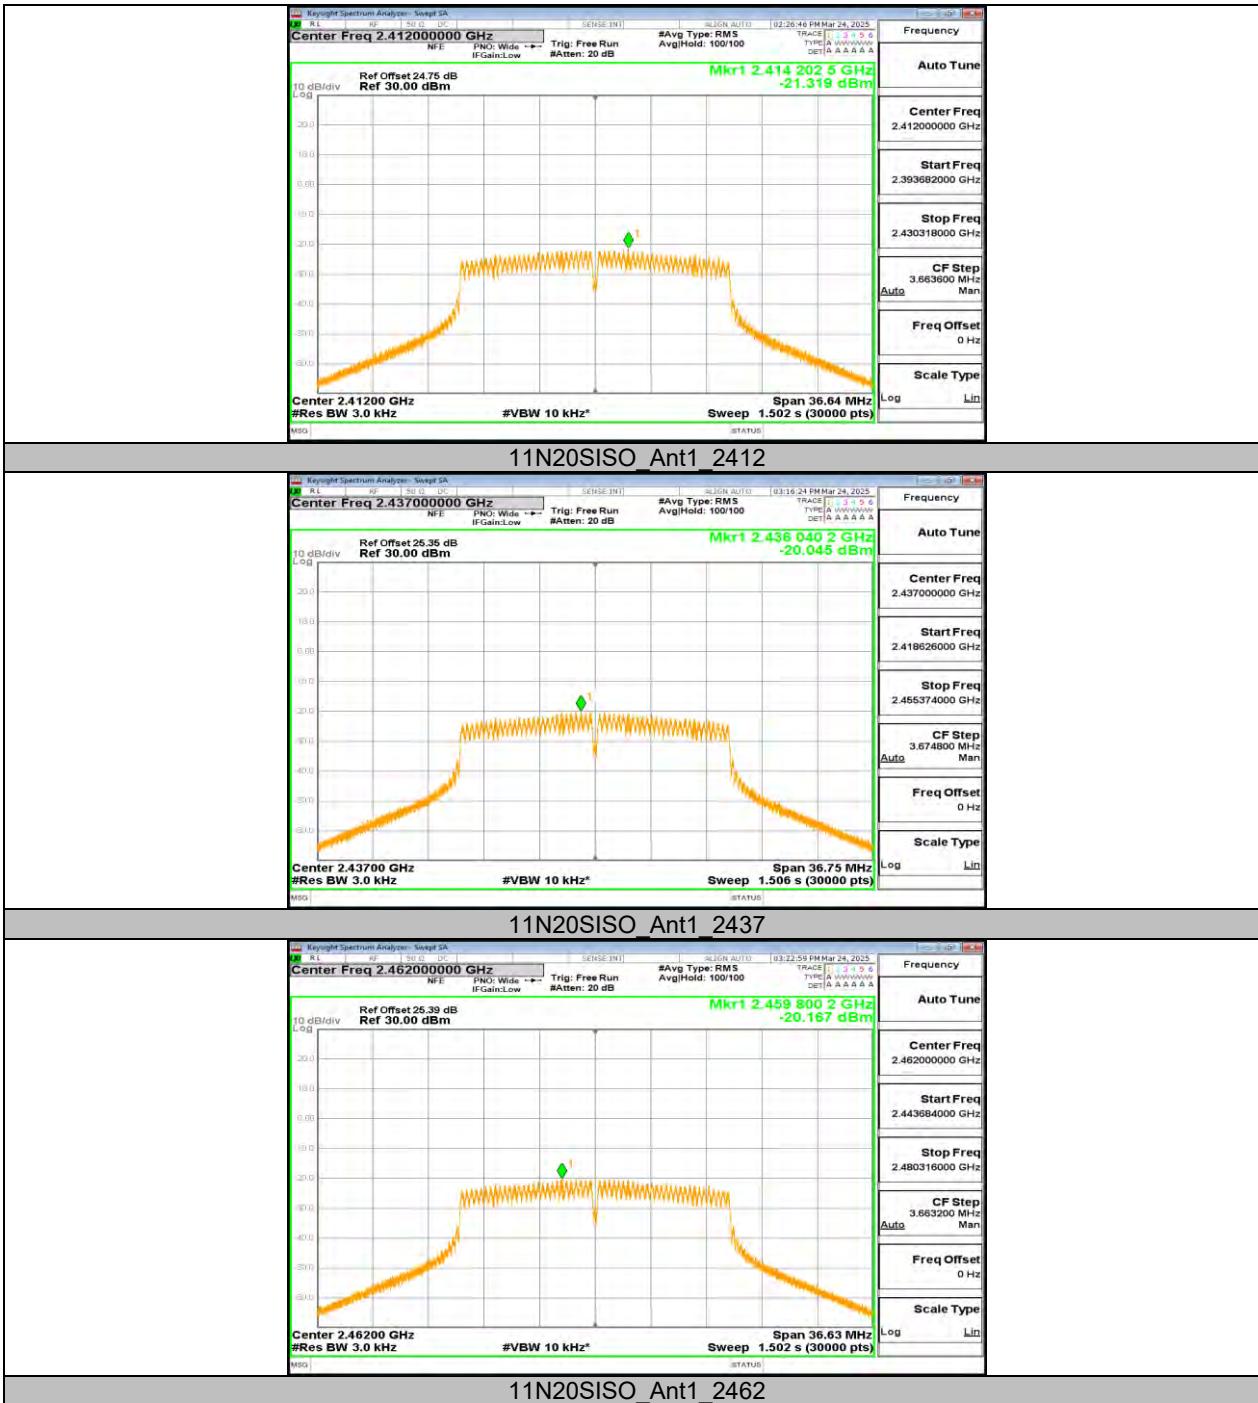

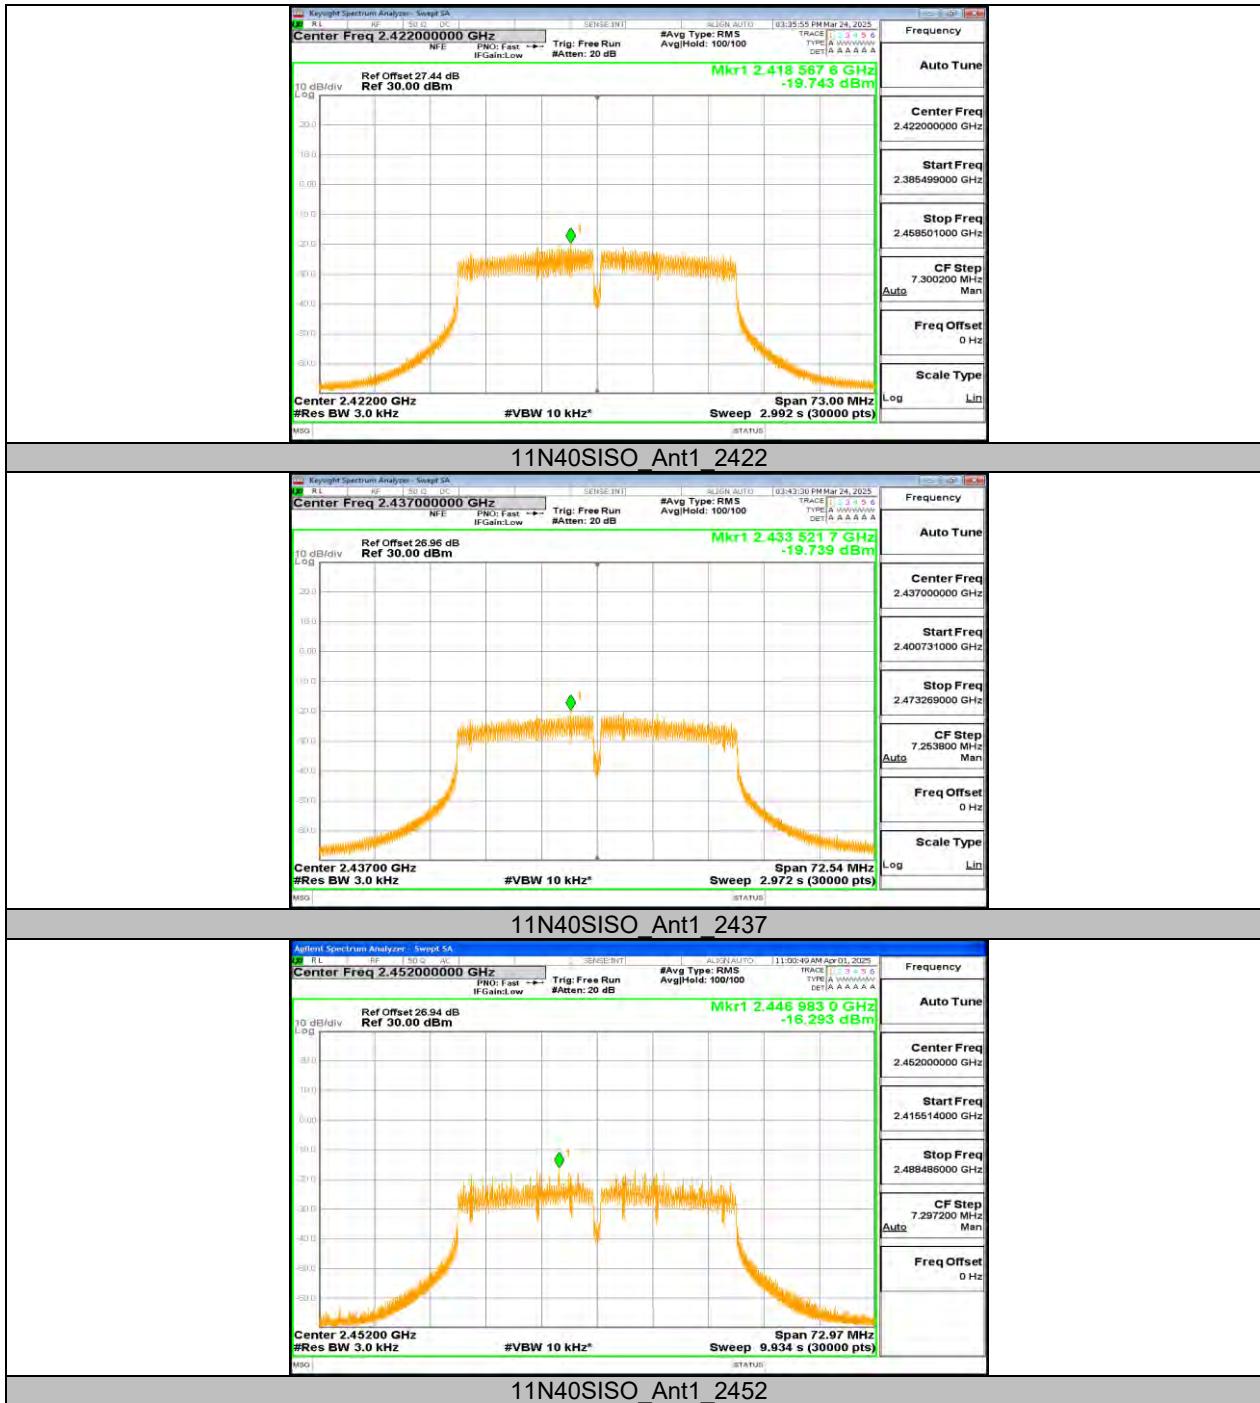

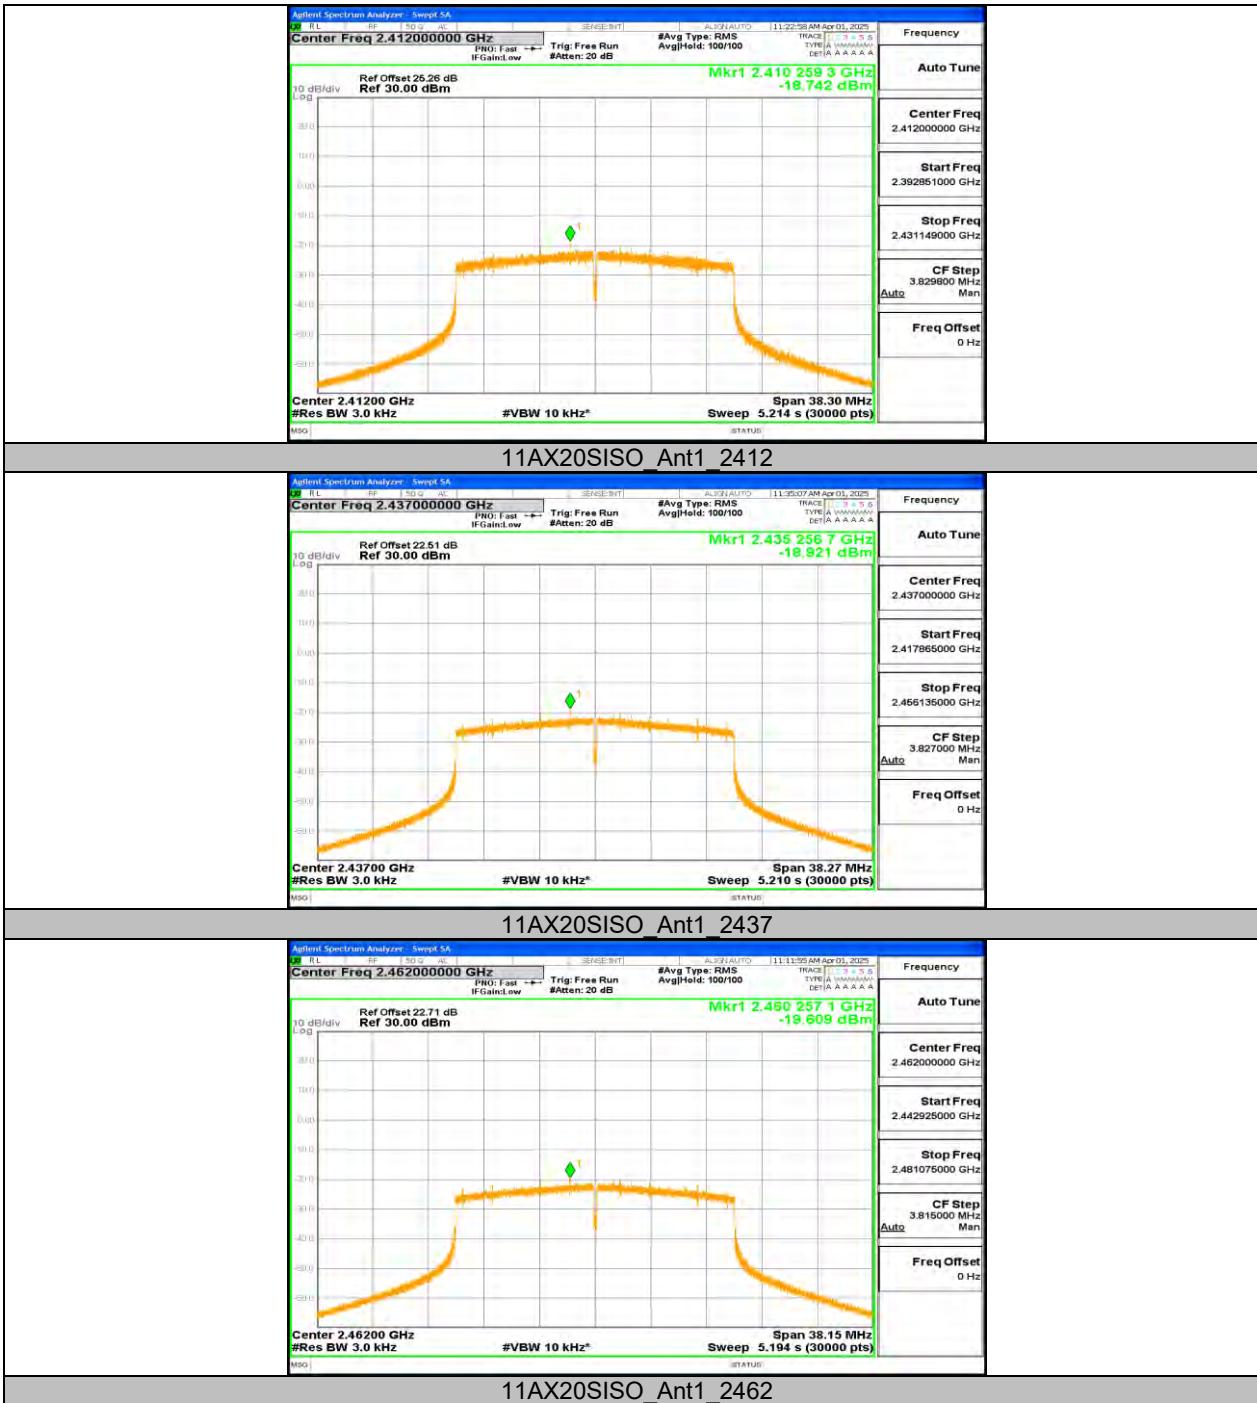

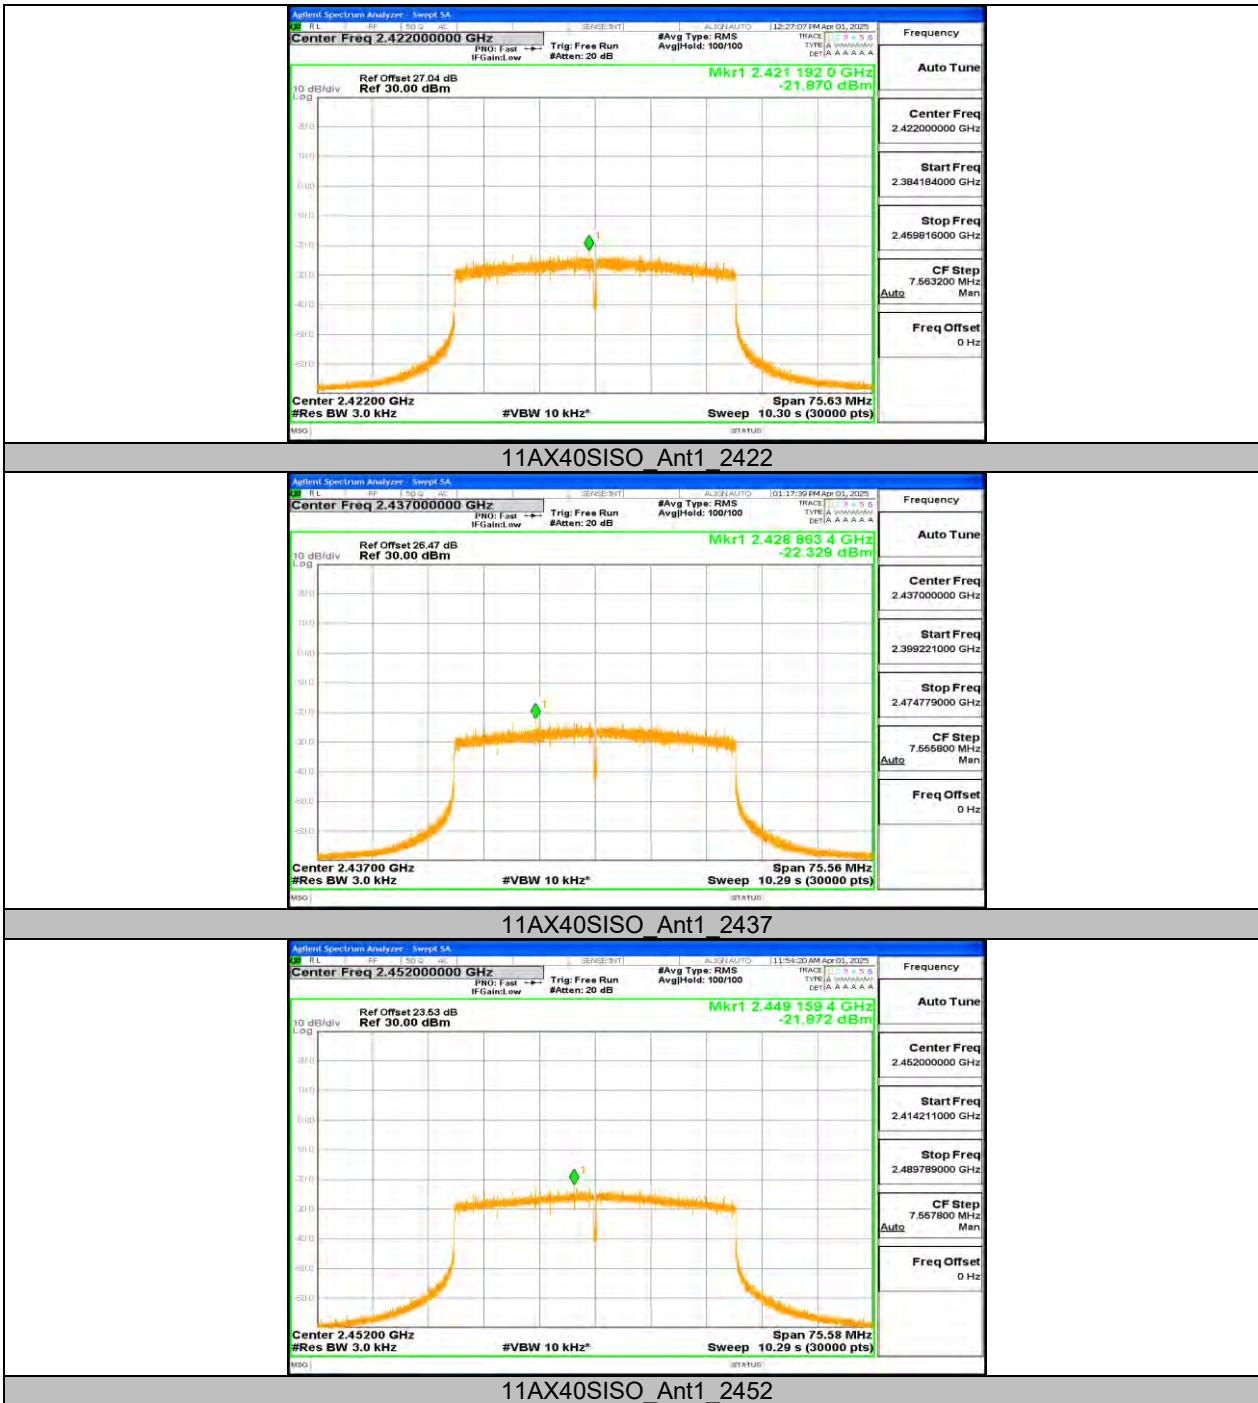


## 11.5. APPENDIX E: BAND EDGE MEASUREMENTS

### 11.5.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	8.16	-27.12	≤-21.85	PASS
		High	2462	8.87	-46.29	≤-21.13	PASS
11G	Ant1	Low	2412	2.69	-28.43	≤-27.32	PASS
		High	2462	2.08	-43.4	≤-27.93	PASS
11N20SISO	Ant1	Low	2412	0.70	-30.53	≤-29.3	PASS
		High	2462	1.16	-45.65	≤-28.84	PASS
11N40SISO	Ant1	Low	2422	0.15	-31.89	≤-29.85	PASS
		High	2452	1.37	-41.39	≤-28.63	PASS
11AX20SISO	Ant1	Low	2412	3.57	-29.19	≤-26.43	PASS
		High	2462	4.35	-43.2	≤-25.65	PASS
11AX40SISO	Ant1	Low	2422	1.09	-29.43	≤-28.91	PASS
		High	2452	1.60	-35.87	≤-28.4	PASS

## 11.5.2. Test Graphs



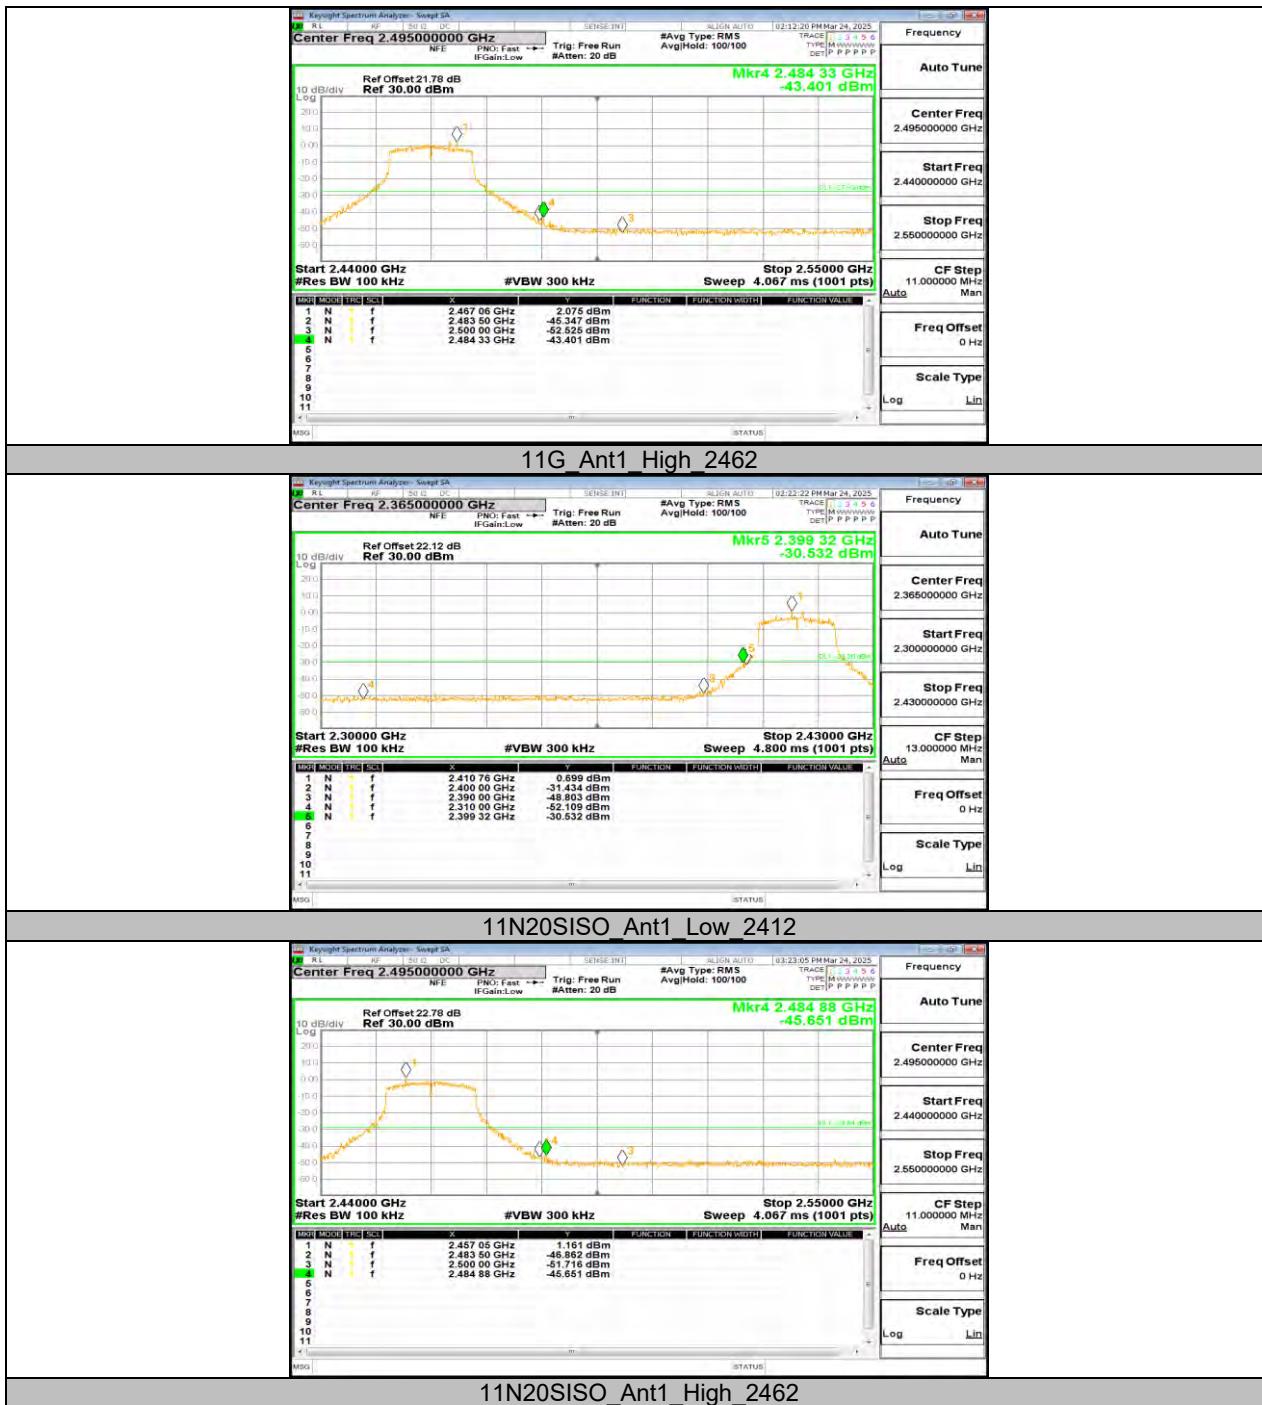






## 11.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION


### 11.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	7.72	---	PASS
			30~1000	-50.17	≤-22.28	PASS
			1000~26500	-36.82	≤-22.28	PASS
		2437	Reference	6.25	---	PASS
			30~1000	-51.2	≤-23.75	PASS
			1000~26500	-37	≤-23.75	PASS
		2462	Reference	6.16	---	PASS
			30~1000	-50.74	≤-23.84	PASS
			1000~26500	-35.71	≤-23.84	PASS
11G	Ant1	2412	Reference	-1.18	---	PASS
			30~1000	-50.58	≤-31.18	PASS
			1000~26500	-35.7	≤-31.18	PASS
		2437	Reference	0.65	---	PASS
			30~1000	-51.5	≤-29.35	PASS
			1000~26500	-35.84	≤-29.35	PASS
		2462	Reference	0.89	---	PASS
			30~1000	-51.67	≤-29.11	PASS
			1000~26500	-36.53	≤-29.11	PASS
11N20SISO	Ant1	2412	Reference	-2.52	---	PASS
			30~1000	-50.99	≤-32.52	PASS
			1000~26500	-36.16	≤-32.52	PASS
		2437	Reference	-1.30	---	PASS
			30~1000	-49.41	≤-31.3	PASS
			1000~26500	-34.92	≤-31.3	PASS
		2462	Reference	-1.11	---	PASS
			30~1000	-49.31	≤-31.11	PASS
			1000~26500	-34.72	≤-31.11	PASS
11N40SISO	Ant1	2422	Reference	-0.61	---	PASS
			30~1000	-49.32	≤-30.61	PASS
			1000~26500	-34.53	≤-30.61	PASS
		2437	Reference	-2.75	---	PASS
			30~1000	-50.18	≤-32.75	PASS
			1000~26500	-35.63	≤-32.75	PASS
		2452	Reference	-2.64	---	PASS
			30~1000	-49.7	≤-32.64	PASS
			1000~26500	-35.2	≤-32.64	PASS
11AX20SISO	Ant1	2412	Reference	0.38	---	PASS
			30~1000	-50.08	≤-29.62	PASS
			1000~26500	-34.68	≤-29.62	PASS
		2437	Reference	0.47	---	PASS
			30~1000	-49.5	≤-29.53	PASS
			1000~26500	-35.55	≤-29.53	PASS
		2462	Reference	0.32	---	PASS
			30~1000	-48.89	≤-29.68	PASS
			1000~26500	-35.28	≤-29.68	PASS
11AX40SISO	Ant1	2422	Reference	0.50	---	PASS
			30~1000	-49.63	≤-29.5	PASS
			1000~26500	-35.44	≤-29.5	PASS
		2437	Reference	1.71	---	PASS
			30~1000	-50.12	≤-28.29	PASS
			1000~26500	-35.2	≤-28.29	PASS
		2452	Reference	-0.68	---	PASS
			30~1000	-50.67	≤-30.68	PASS
			1000~26500	-35.46	≤-30.68	PASS

## 11.6.2. Test Graphs




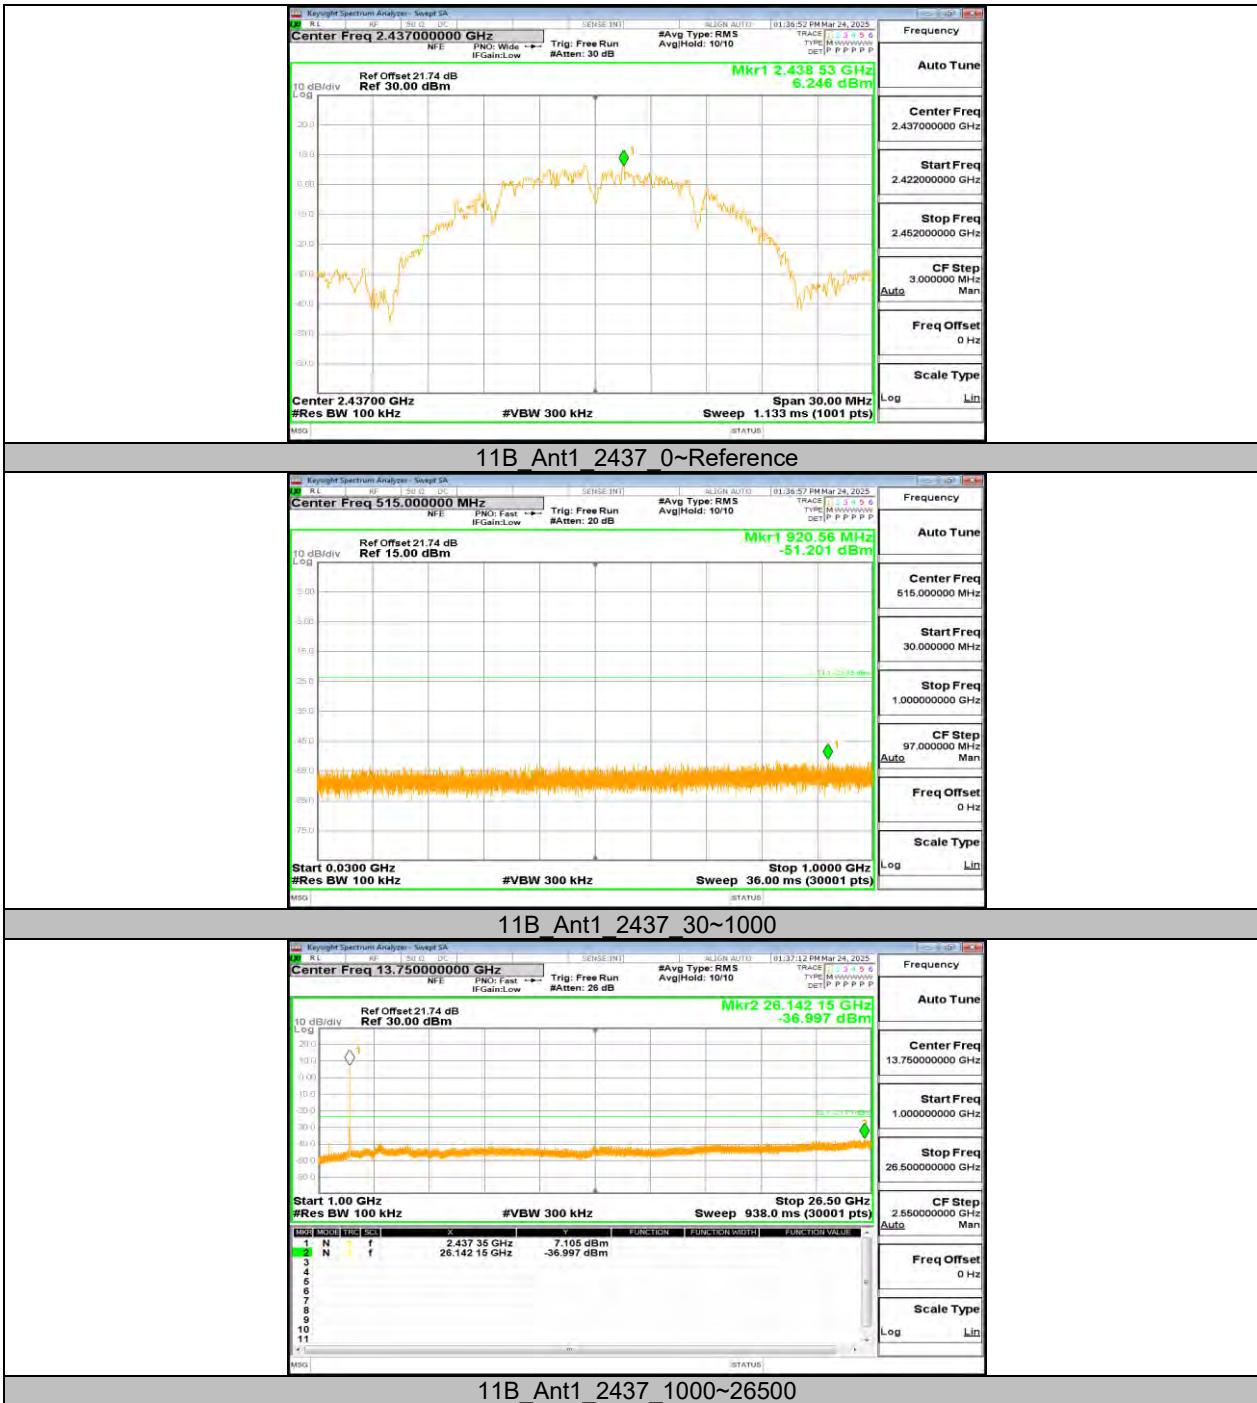

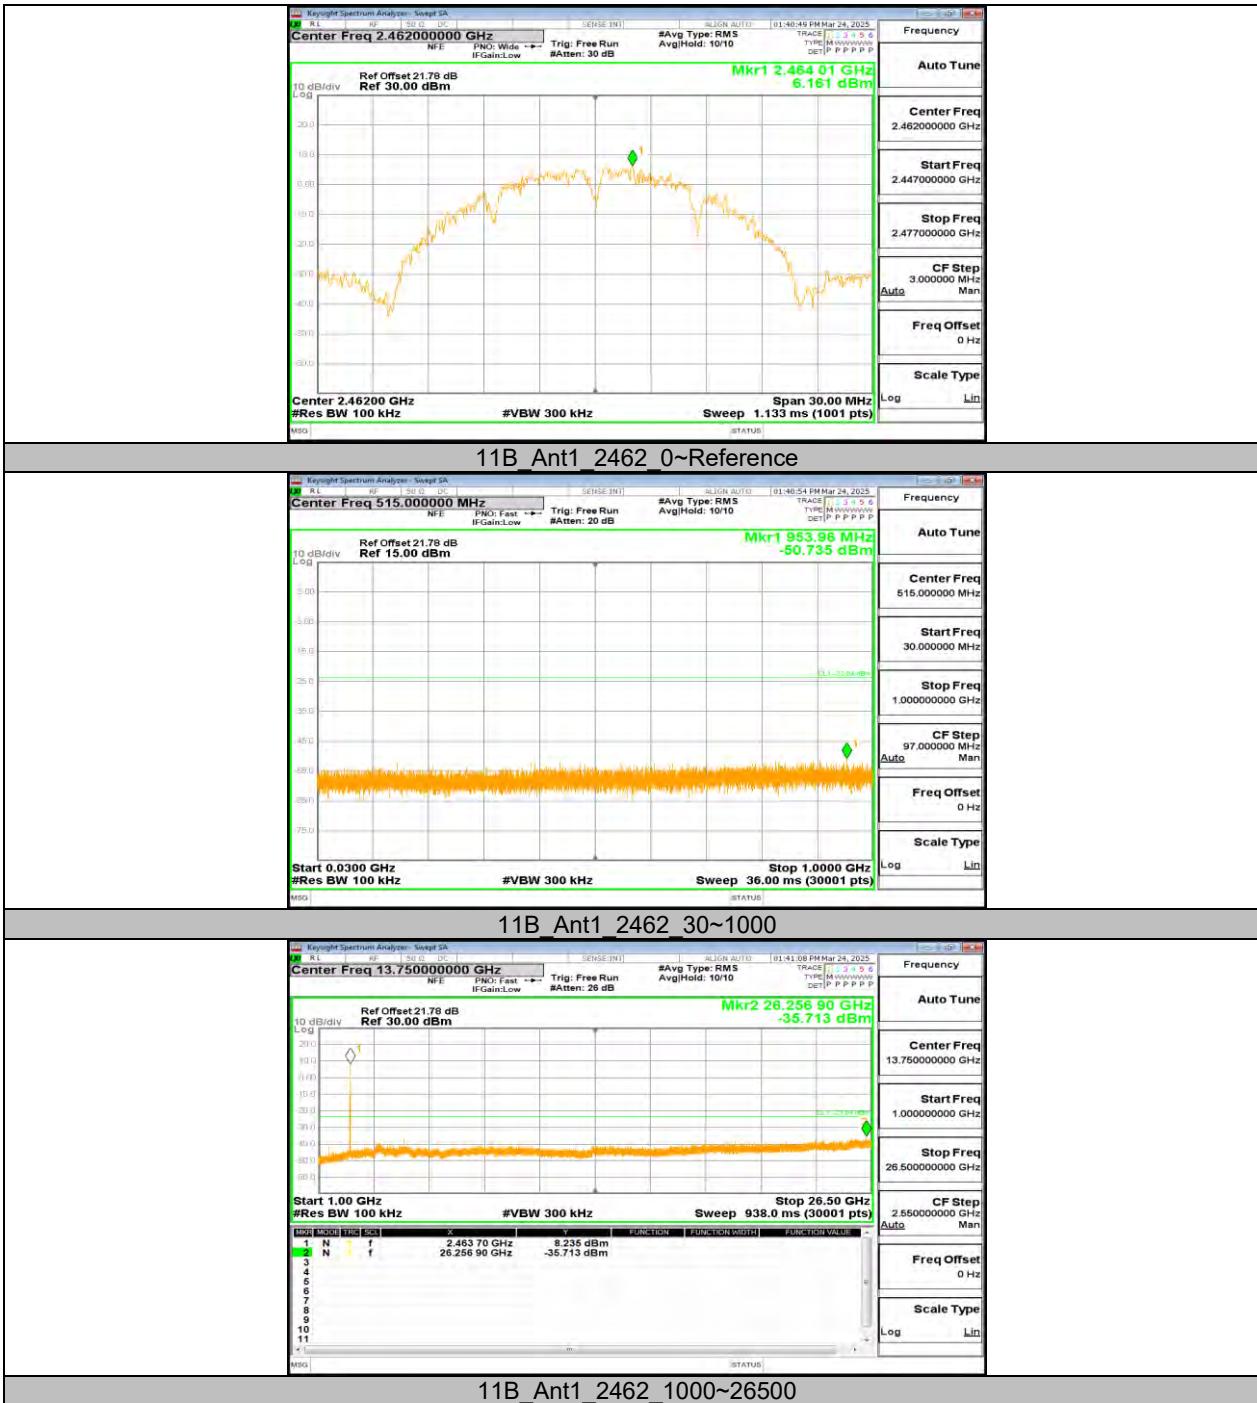








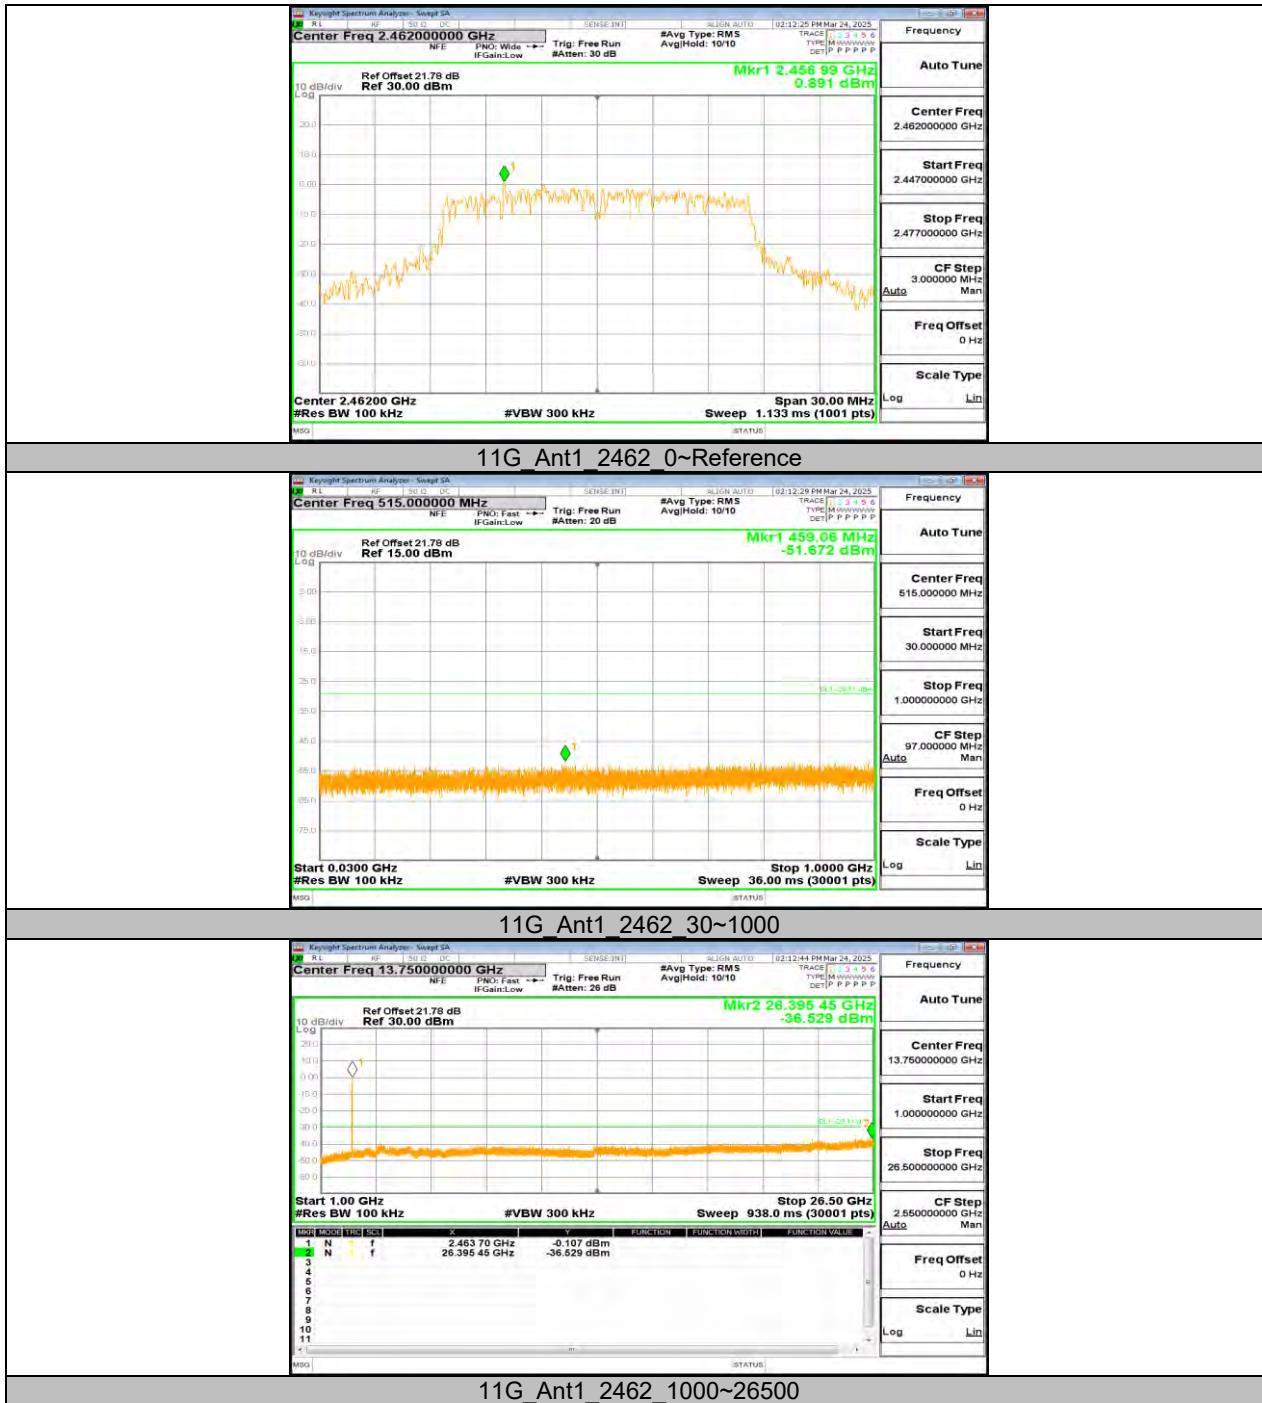





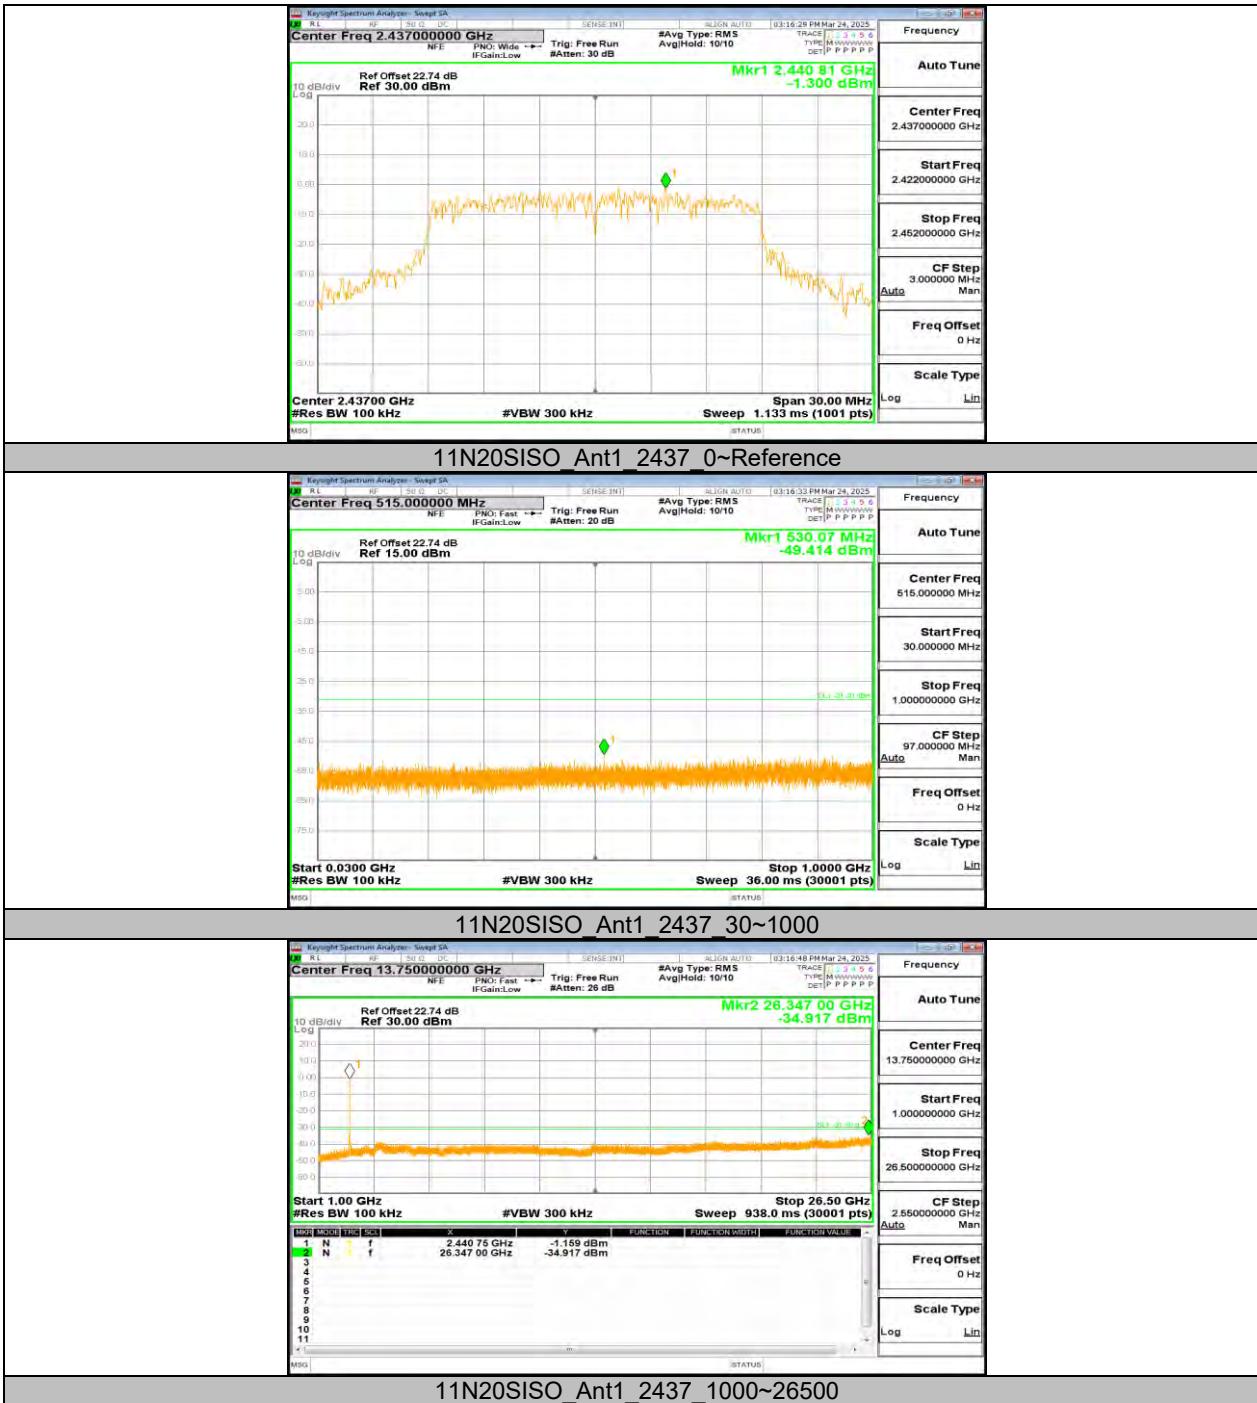


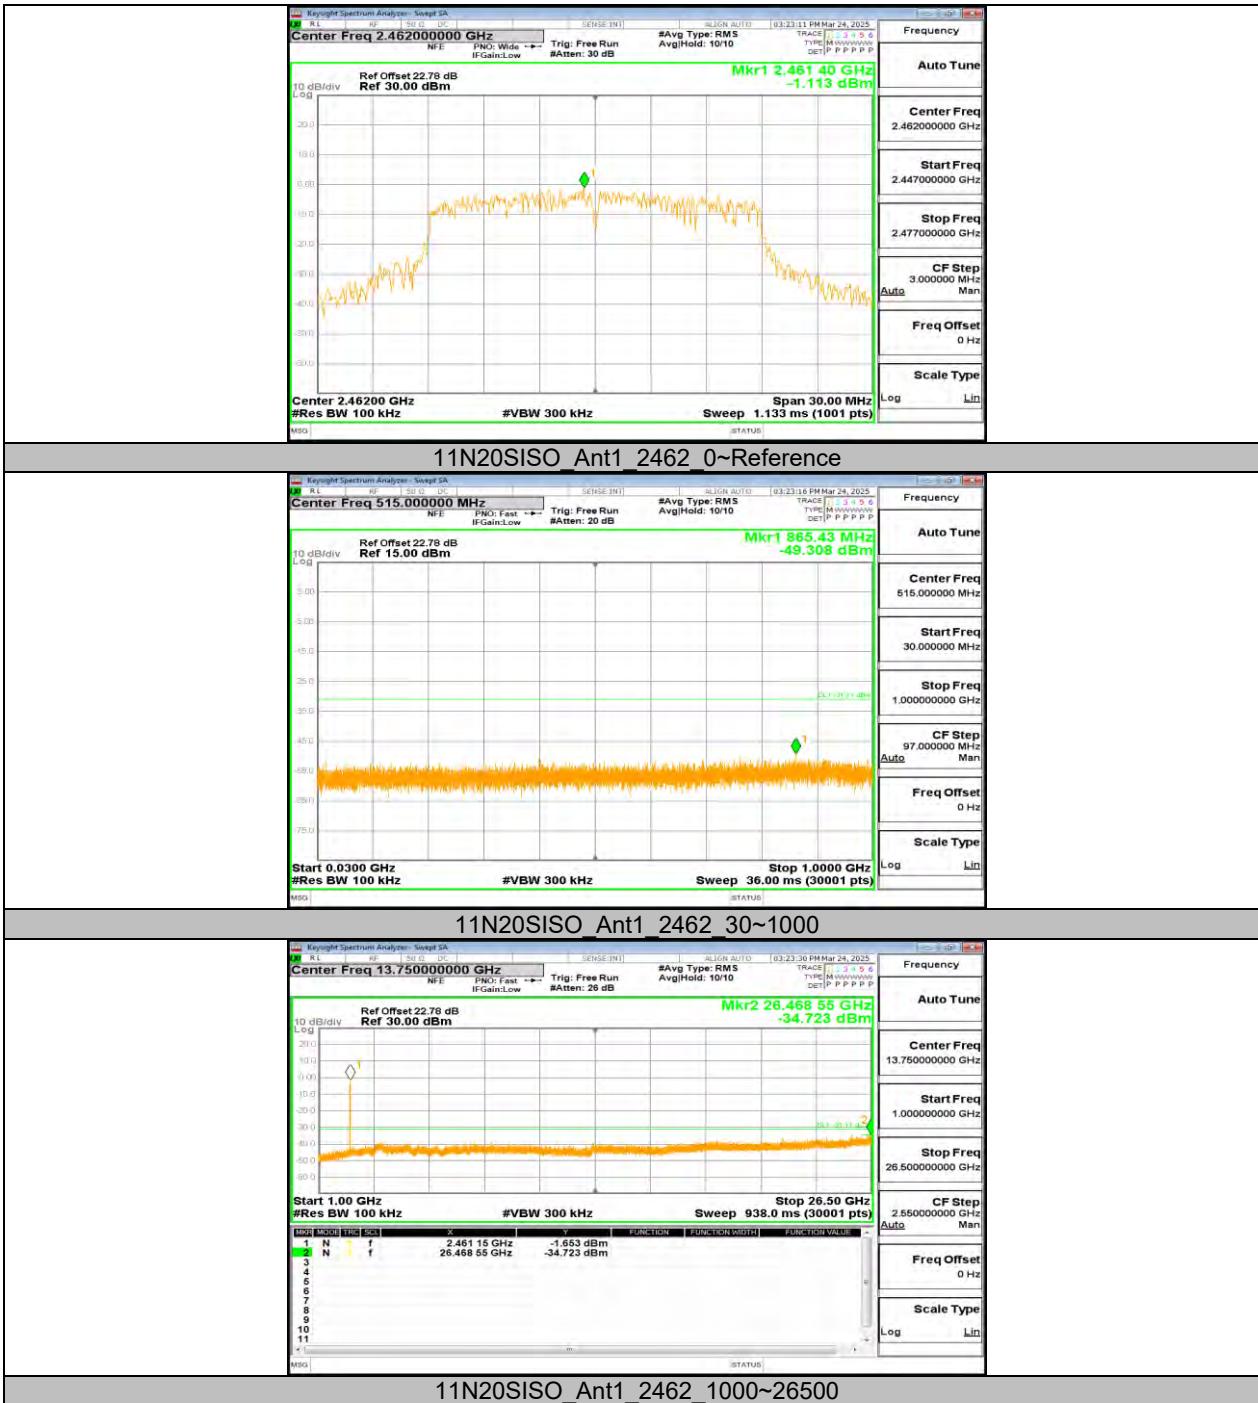


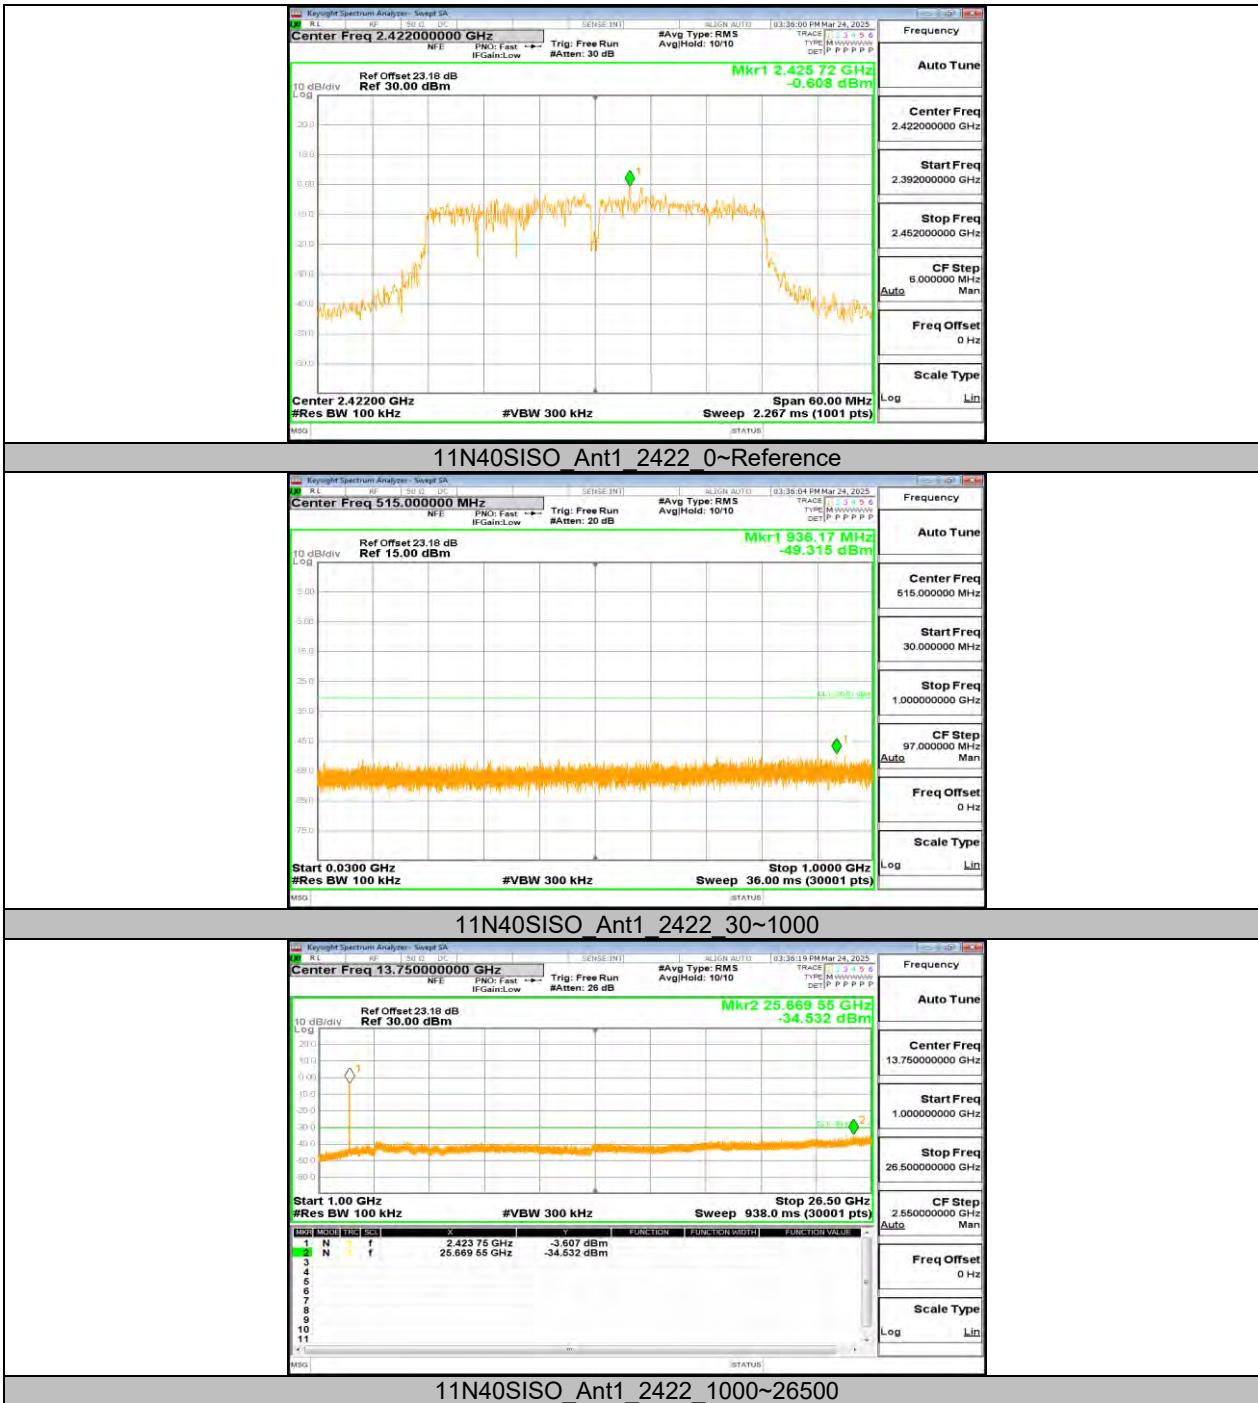


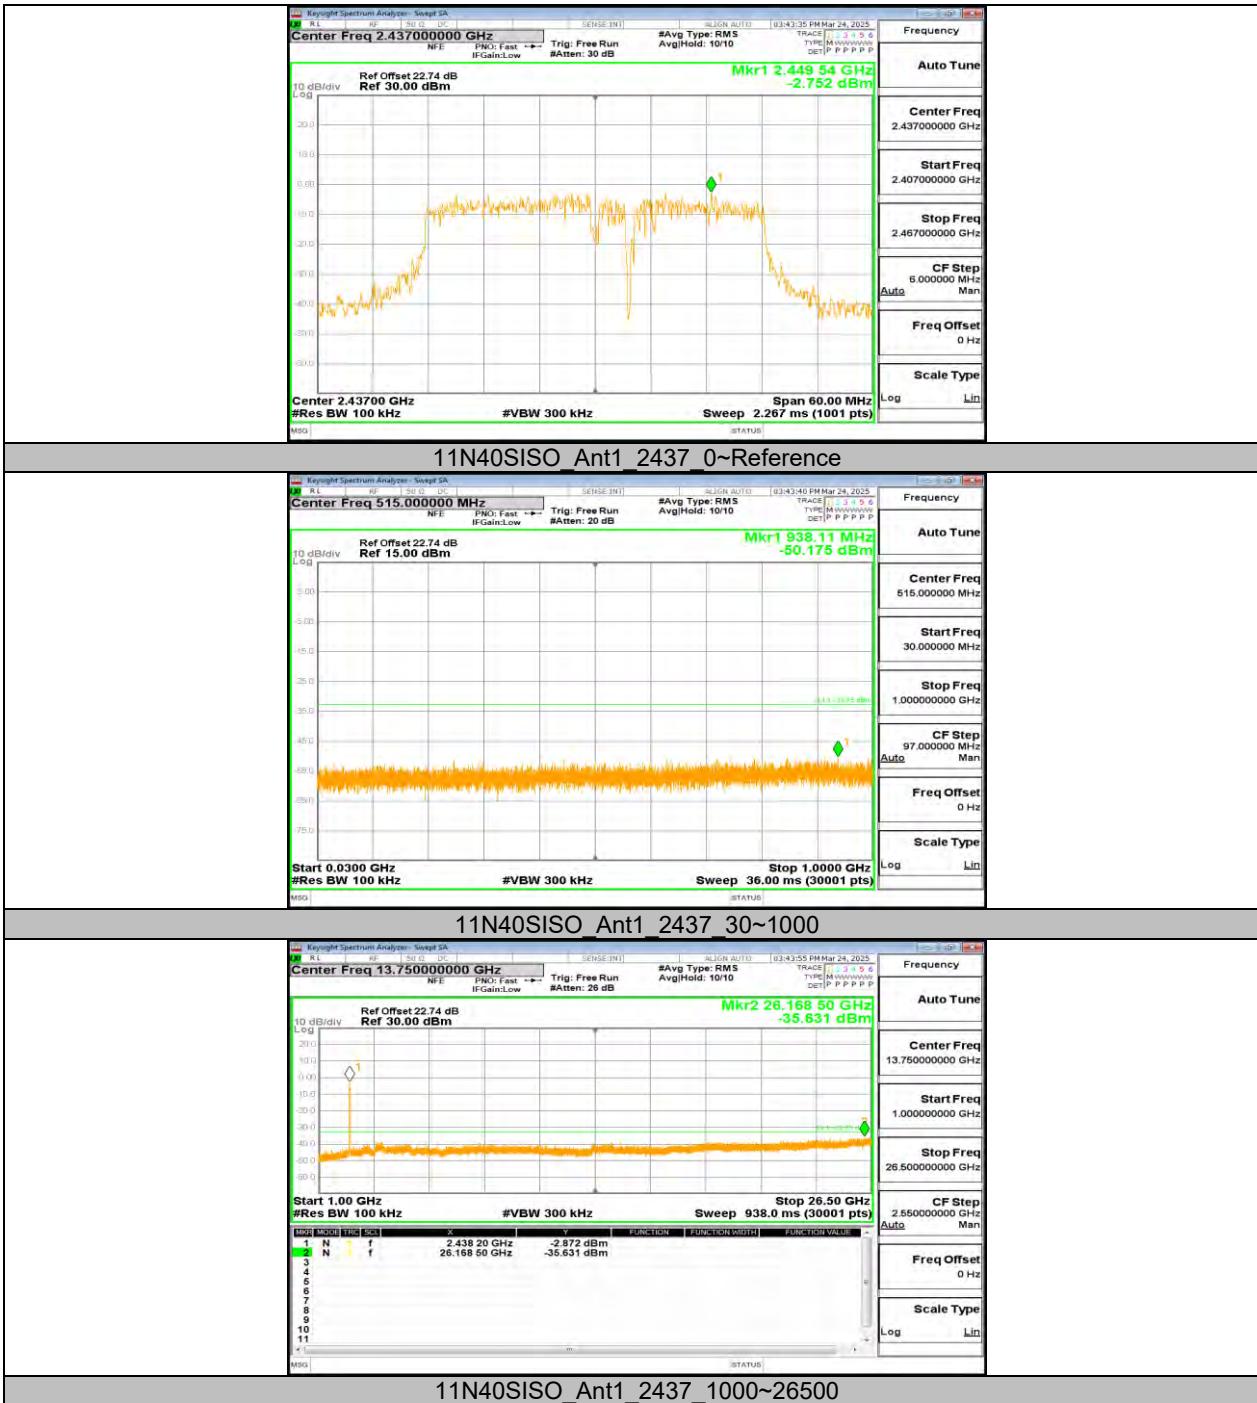

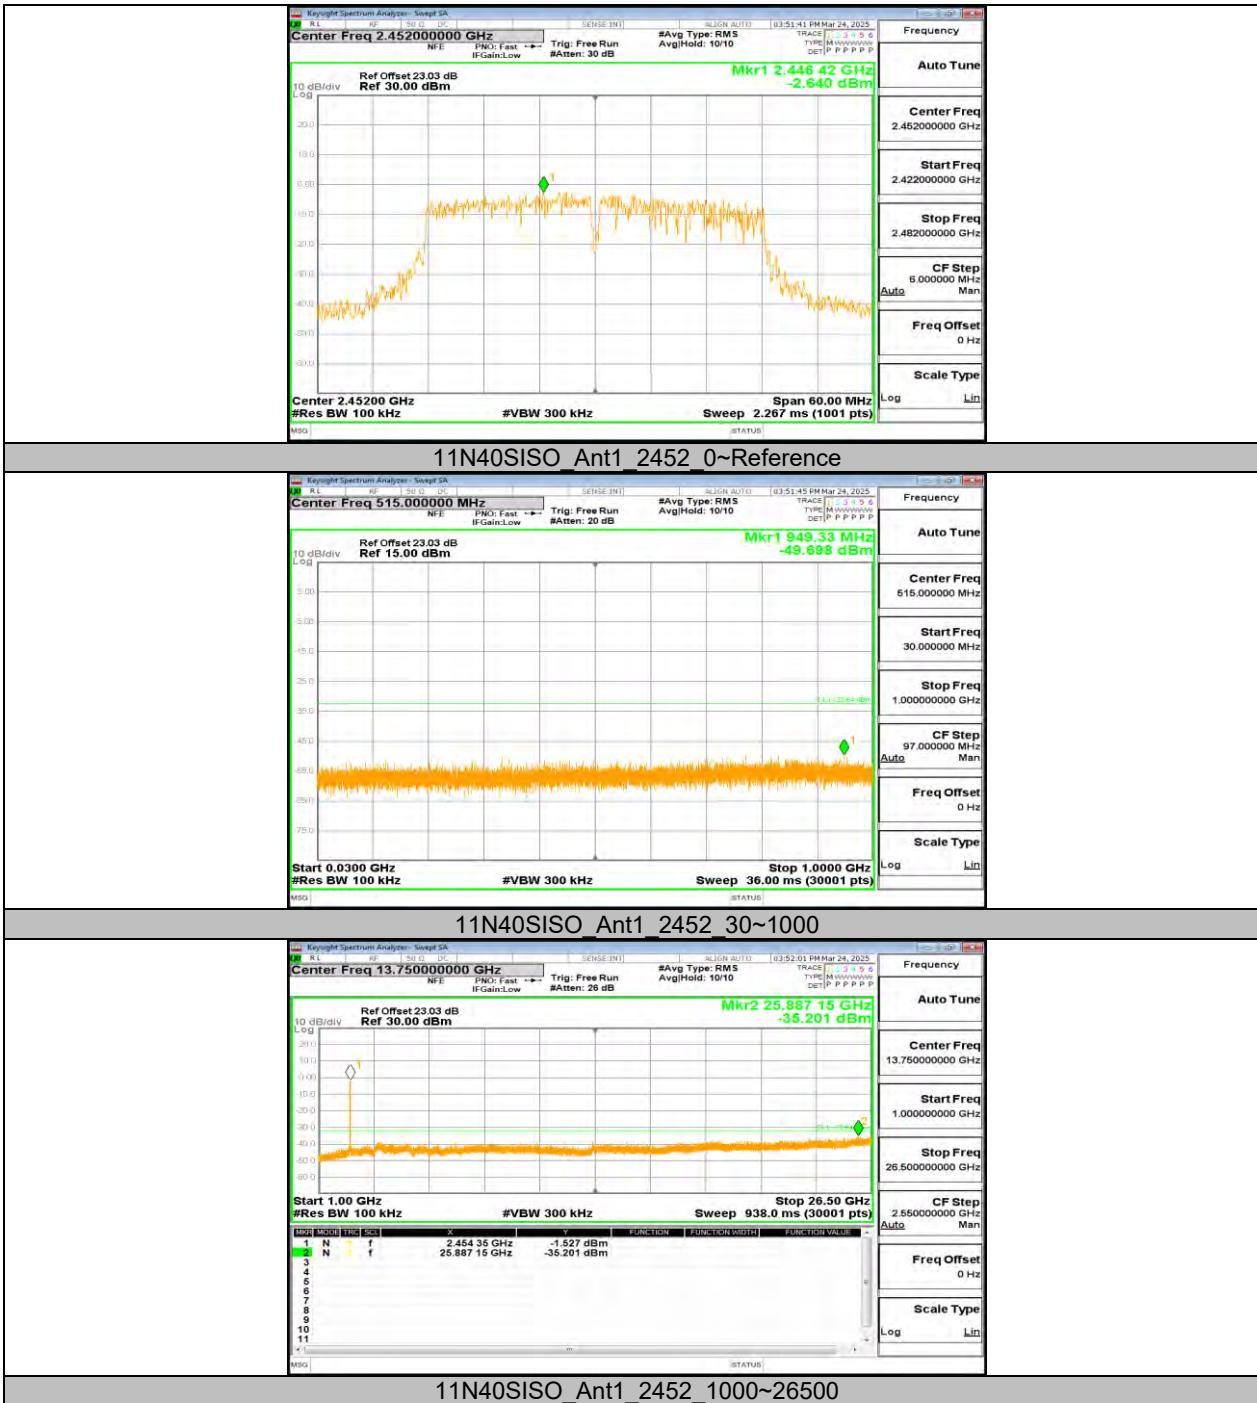


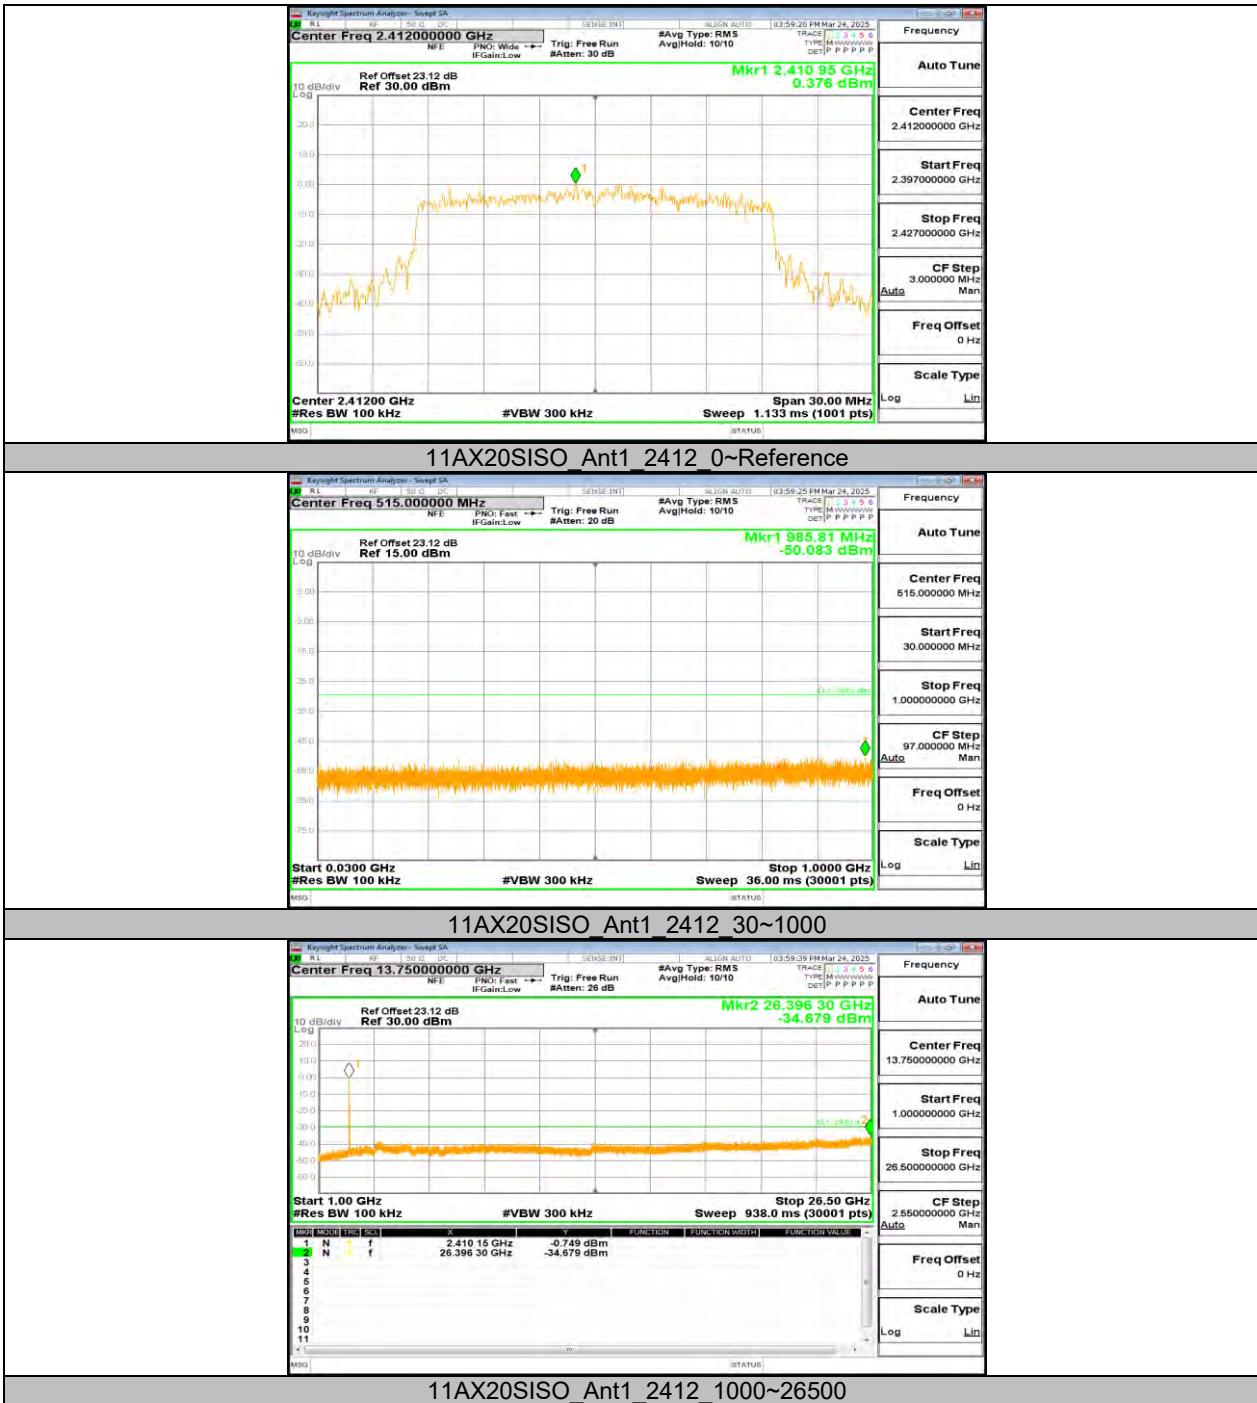

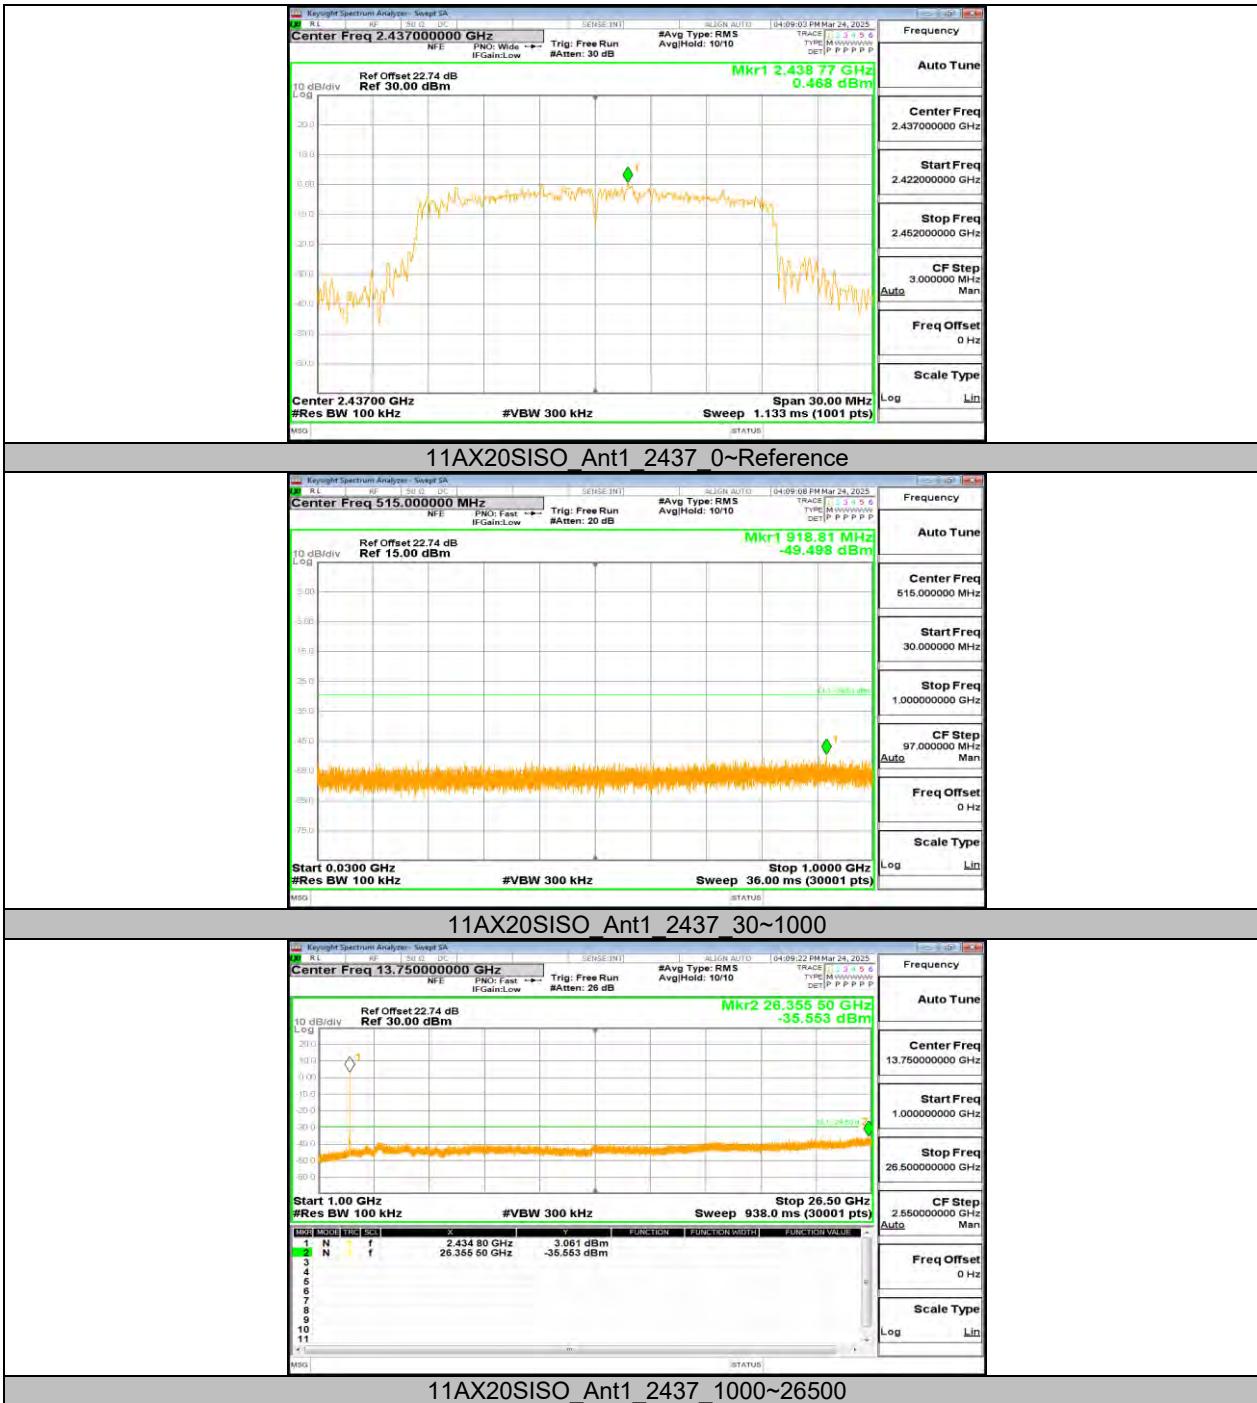

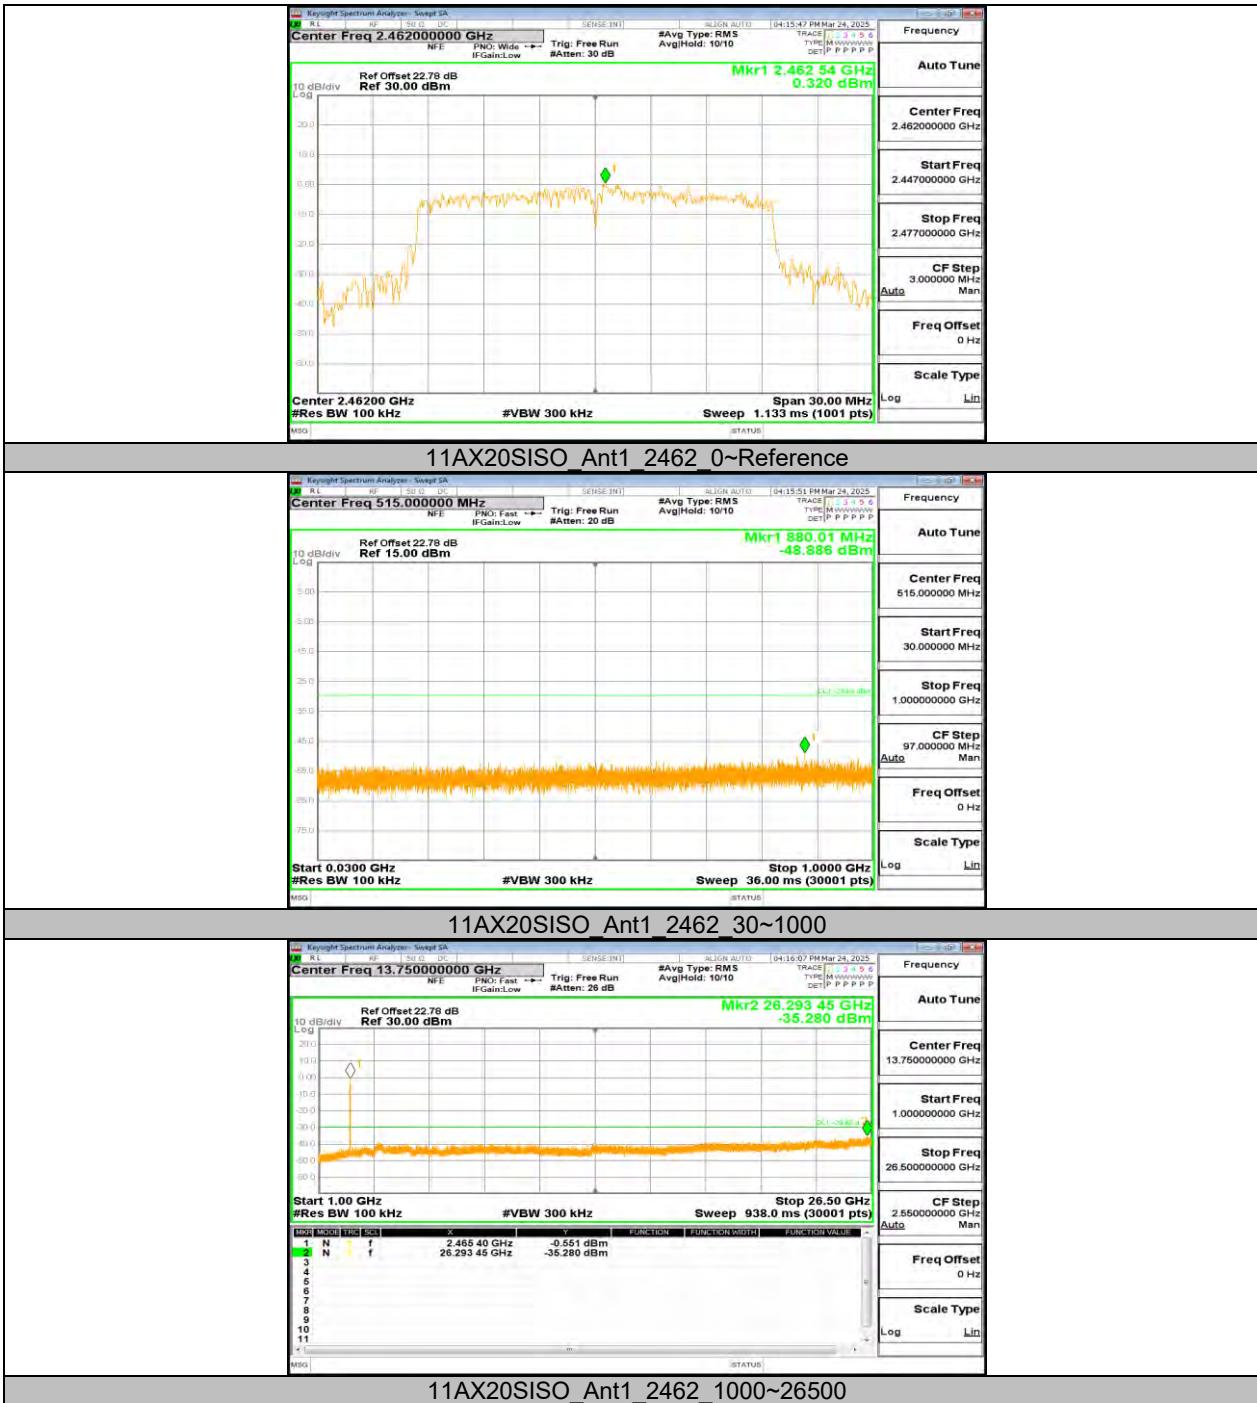



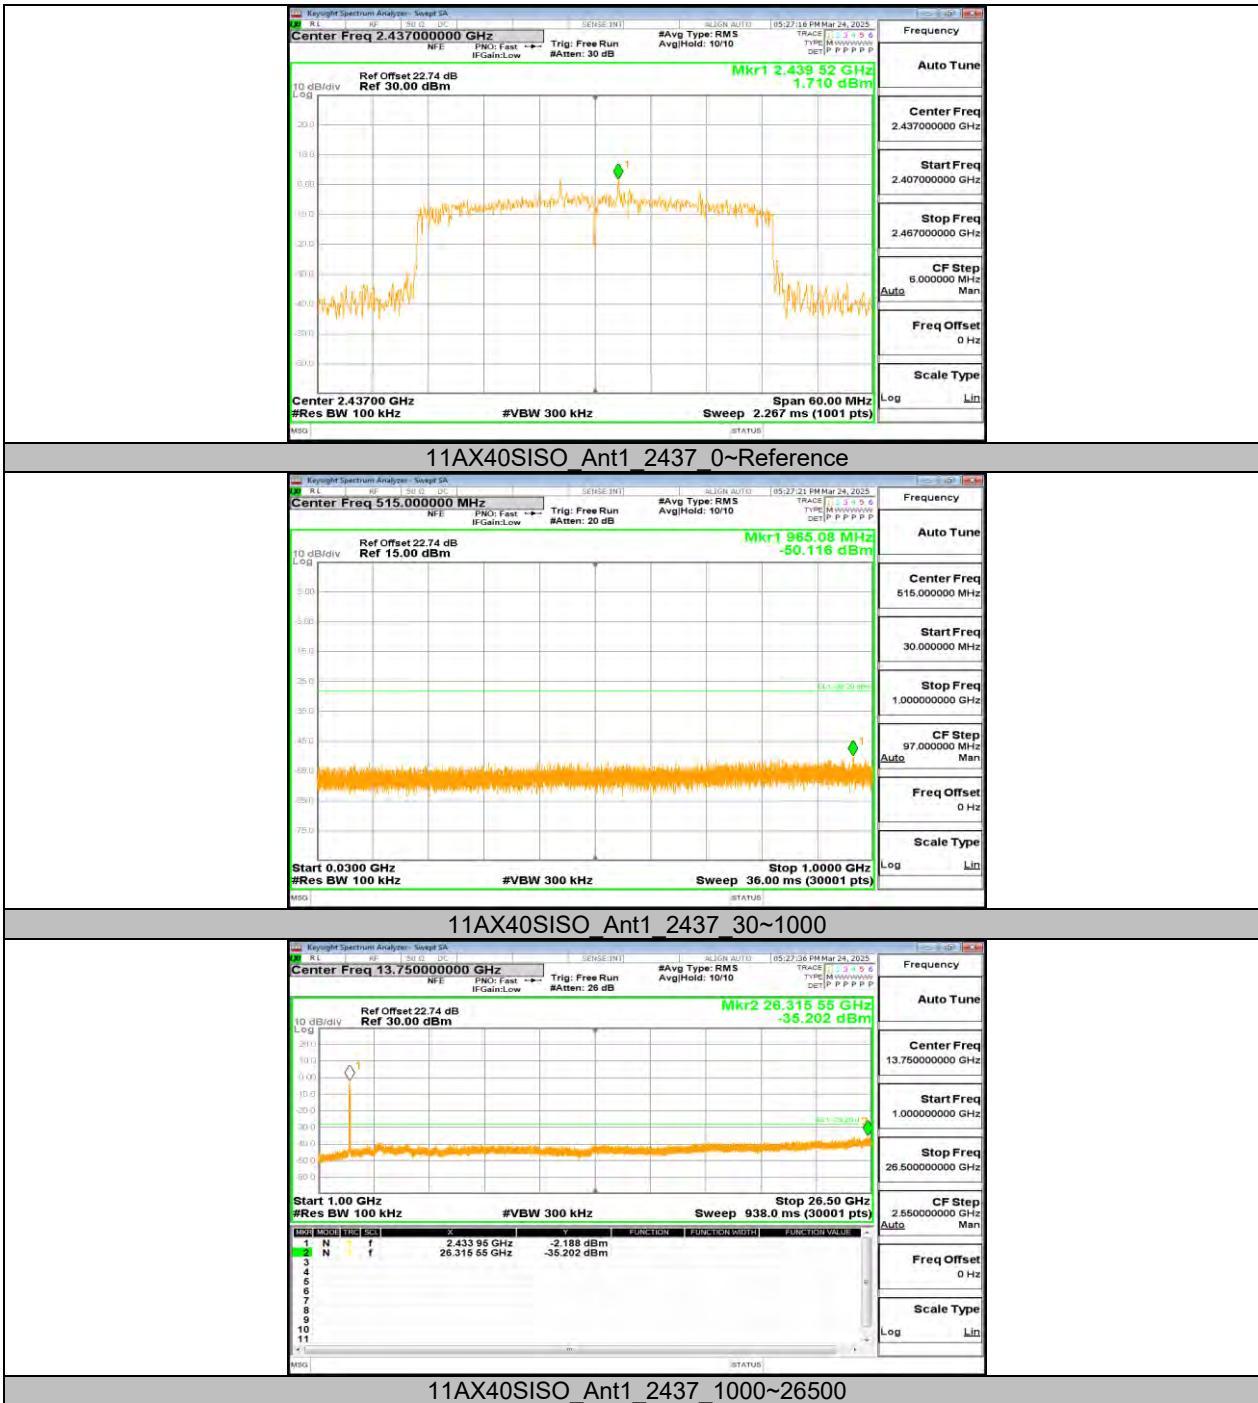



## 11.7. APPENDIX G: DUTY CYCLE

### 11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.22	9.24	0.8896	88.96	0.51	0.12	1
11G	1.35	2.40	0.5625	56.25	2.50	0.74	1
11N20SISO	1.26	2.31	0.5455	54.55	2.63	0.79	1
11N40SISO	0.63	1.68	0.3750	37.50	4.26	1.59	2
11AX20SISO	0.99	2.04	0.4853	48.53	3.14	1.01	2
11AX40SISO	0.51	1.56	0.3269	32.69	4.86	1.96	2

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

## 11.7.2. Test Graphs



