

TEST REPORT

Report No. : CHTEW21070042 Report verification: 

Project No. : SHT2105011003EW

FCC ID : GVQS020

Applicant's name : Skyroam Technology Co., Ltd.

Address : No.902,9th Floor, Weisheng Technology Building, No.9966
Shennan Avenue, Shenzhen, Guangdong, China

Test item description : Journey1, The Odyssey, E1

Trade Mark : Travlfi, OTR MOBILE, SIMO, SKYROAM

Model/Type reference : S020

Listed Model(s) : -

Standard : FCC 47 CFR Part2.1093
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Jun. 03, 2021

Date of testing : Jun. 04, 2021- Jul. 08, 2021

Date of issue : Jul. 09, 2021

Result : PASS

Compiled by
(position+printedname+signature).... : File administrators: Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Test Engineer: Patrick Qiu

Patrick Qiu

Approved by
(position+printedname+signature).... : Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genny Road, Tianliao,
Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Statement of Compliance</u>	<u>3</u>
<u>2.</u>	<u>Test Standards and Report version</u>	<u>4</u>
2.1.	Test Standards	4
2.2.	Report version	4
<u>3.</u>	<u>Summary</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	RF Specification Description	5
3.4.	Testing Laboratory Information	7
3.5.	Environmental conditions	7
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>8</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>9</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>10</u>
6.1.	SAR Measurement Set-up	10
6.2.	DASY5 E-field Probe System	11
6.3.	Phantoms	12
6.4.	Device Holder	12
<u>7.</u>	<u>SAR Test Procedure</u>	<u>13</u>
7.1.	Scanning Procedure	13
7.2.	Data Storage and Evaluation	15
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>17</u>
8.1.	Hotspot Mode Exposure conditions	17
<u>9.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>18</u>
9.1.	Tissue Dielectric Parameters	18
9.2.	System Check	20
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>30</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>31</u>
11.1.	WCDMA	31
11.2.	LTE	34
11.3.	Wi-Fi	53
11.4.	Bluetooth	54
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>55</u>
<u>13.</u>	<u>Antenna Location</u>	<u>67</u>
<u>14.</u>	<u>Measured and Reported SAR Results</u>	<u>68</u>
<u>15.</u>	<u>SAR Measurement Variability</u>	<u>94</u>
<u>16.</u>	<u>Simultaneous Transmission analysis</u>	<u>95</u>
<u>17.</u>	<u>TestSetup Photos</u>	<u>111</u>
<u>18.</u>	<u>External and Internal Photos of the EUT</u>	<u>113</u>

1. Statement of Compliance

Maximum Reported SAR (W/kg @1g)				
RF Exposure Conditions	PCB	DTS	NII	Simultaneous TX
Body(Dist.= 5mm)	1.050	0.237	0.529	1.579

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Test Standards and Report version

2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

2.2. Report version

Revision No.	Date of issue	Description
N/A	2021-07-09	Original

3. Summary

3.1. Client Information

Applicant:	Skyroam Technology Co., Ltd.
Address:	No.902,9th Floor,Weisheng Technology Building,No.9966 Shennan Avenue,Shenzhen,Guangdong,China
Manufacturer:	Skyroam Technology Co., Ltd.
Address:	No.902,9th Floor,Weisheng Technology Building,No.9966 Shennan Avenue,Shenzhen,Guangdong,China

3.2. Product Description

Main unit	
Name of EUT:	Journey1, The Odyssey, E1
Trade Mark:	Travfi, OTR MOBILE, SIMO,SKYROAM
Model No.:	S020
Listed Model(s):	-
Power supply:	DC3.8V
Device Category:	Portable
Product stage:	Production unit
RF Exposure Environment:	General Population/Uncontrolled
HTW test sample No.:	YPHT21050110002
Hardware version:	Y3919A-V1.1
Software version:	y3919a_skyroam_mifi_2019082913
Device Dimension:	Overall (Length x Width x Thickness): 90 x 90 x 20 mm

3.3. RF Specification Description

WCDMA	
Operation Band:	FDD Band II FDD Band IV FDD Band V
Power Class:	Class 3
Operating Mode:	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA
Antenna Type:	Integral permanent antenna
LTE	
Operation Band:	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 17 TDD Band 38 TDD Band 41
Power Class:	Class 3
Operating Mode:	QPSK 16QAM

Antenna Type:	Integral permanent antenna
Does this device support Carrier Aggregation (CA)? ☐ Yes ☒ No	
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No	
Wi-Fi 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Antenna Type:	Integral permanent antenna
Does this device 2.4GHz Wi-Fi support hotspot operation? ☒ Yes ☐ No	
Wi-Fi 5G	
Operation Band:	U-NII-1 U-NII-3
Operating Mode:	802.11a 802.11n(HT20) 802.11n(HT40) 802.11ac(VHT20) 802.11ac(VHT40)
Antenna Type:	Integral permanent antenna
Does this device 5GHz Wi-Fi support hotspot operation? ☐ Yes ☒ No	
Bluetooth	
Bluetooth version:	V4.2
Support function:	EDR
Operating Mode:	GFSK $\pi/4$ DQPSK 8DPSK
Antenna Type:	Integral permanent antenna
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Bluetooth	
Bluetooth version:	V4.2
Support function:	BLE
Operating Mode:	GFSK
Antenna Type:	Integral permanent antenna
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Remark: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2021/05/27	2022/05/26
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2020/10/15	2021/10/14
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
●	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2020/08/11	2021/08/10
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2020/08/11	2021/08/10
●	Power sensor	R&S	NRP18A	101386	2021/05/27	2022/05/26
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2020/11/12	2021/11/11
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2020/11/12	2021/11/11
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2020/11/12	2021/11/11

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

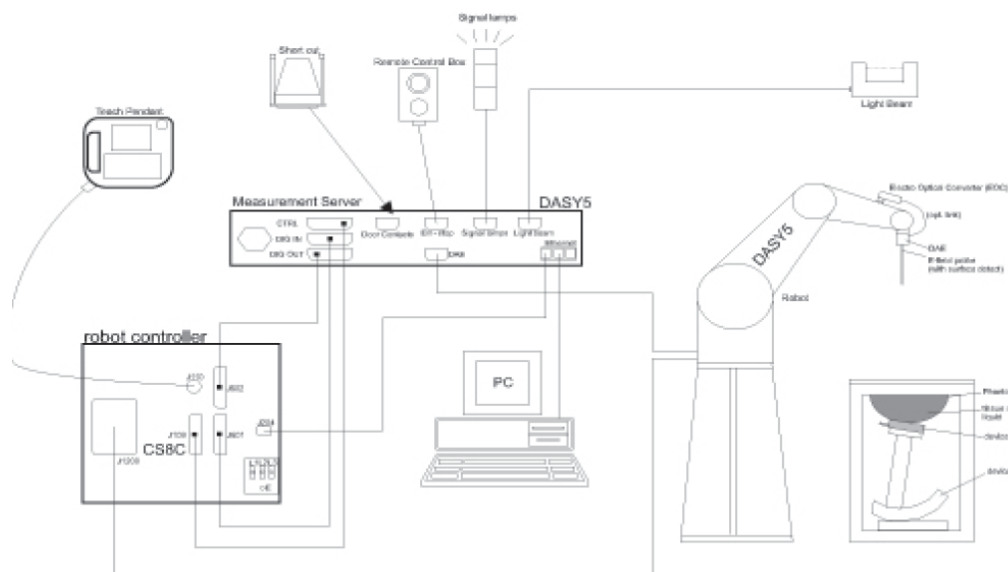

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

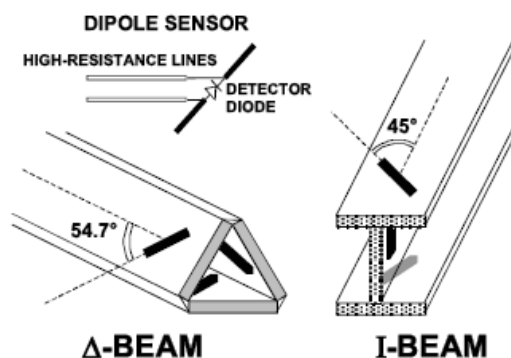

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM-Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Resolutions per FCC KDB Publication 865664 D01v04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within $\pm 5 \%$.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : \quad E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H - \text{fieldprobes} : \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$


SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom

8.1. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either 10 mm or that used in the body-worn accessory configuration, whichever is less for devices with dimension $> 9\text{ cm} \times 5\text{ cm}$. For smaller devices with dimensions $\leq 9\text{ cm} \times 5\text{ cm}$ because of a greater potential for next to body use a test separation of $\leq 5\text{ mm}$ must be used.

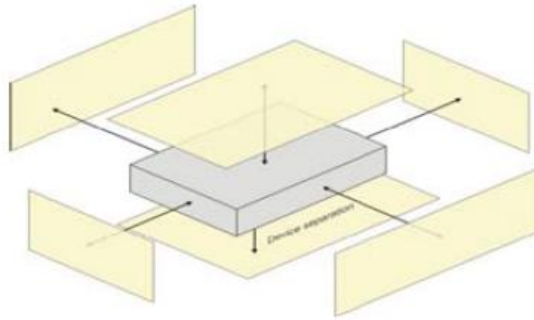

Picture 5 Test positions for Hotspot Mode

9. Dielectric Property Measurements & System Check

9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Tissue dielectric parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:


Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (S/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.17	0.890	0.933	-1.74%	4.88%	±5%	22.3	2021/6/7
835	41.50	40.88	0.900	0.907	-1.49%	0.78%	±5%	22.4	2021/6/8
1750	40.10	38.81	1.370	1.360	-3.22%	-0.73%	±5%	22.2	2021/6/9
1900	40.00	38.61	1.400	1.445	-3.48%	3.21%	±5%	22.0	2021/6/12
2450	39.20	38.07	1.800	1.799	-2.88%	-0.06%	±5%	22.5	2021/6/13
2600	39.00	37.84	1.960	1.911	-2.97%	-2.50%	±5%	22.6	2021/6/14
5250	35.93	35.18	4.706	4.554	-2.09%	-3.23%	±5%	22.5	2021/6/13
5750	35.36	34.34	5.219	5.134	-2.88%	-1.63%	±5%	22.5	2021/6/13

9.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- The results are normalized to 1 W input power.

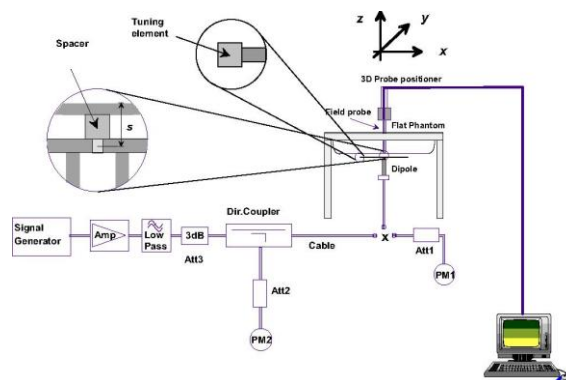

System Performance Check Setup

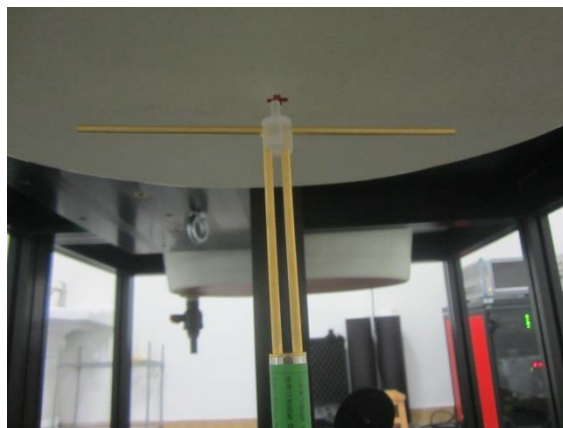


Photo of Dipole Setup

System Check Result:

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target.

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
750	8.43	8.84	2.21	5.59	5.72	1.43	4.86%	2.33%	$\pm 10\%$	22.3	2021/6/7
835	9.39	9.48	2.37	6.14	6.08	1.52	0.96%	-0.98%	$\pm 10\%$	22.4	2021/6/8
1750	36.40	37.40	9.35	19.20	19.76	4.94	2.75%	2.92%	$\pm 10\%$	22.2	2021/6/9
1900	39.80	43.60	10.90	20.30	22.28	5.57	9.55%	9.75%	$\pm 10\%$	22.0	2021/6/12
2450	52.00	55.60	13.90	23.90	25.52	6.38	6.92%	6.78%	$\pm 10\%$	22.5	2021/6/13
2600	56.50	61.60	15.40	25.00	27.44	6.86	9.03%	9.76%	$\pm 10\%$	22.6	2021/6/14

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 100mW	Target 1W	Normalize to 1W	Measured 100mW					
5250	78.20	85.50	8.55	22.30	24.50	2.45	9.34%	9.87%	$\pm 10\%$	22.5	2021/6/13
5750	79.30	87.00	8.70	22.50	24.70	2.47	9.71%	9.78%	$\pm 10\%$	22.5	2021/6/13

Plots of System Performance Check

System Performance Check-Head 750MHz

DUT: D750V3; Type: D750V3; Serial: 1180

Date: 2021-06-07

Communication System: UID 0, A-CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 41.172$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5°C ; Liquid Temperature: 22.3°C ;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW, dist=1.4mm/Area Scan (51x121x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.60 W/kg

Head/d=15mm, Pin=250mW, dist=1.4mm/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.83 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 2.21 W/kg ; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

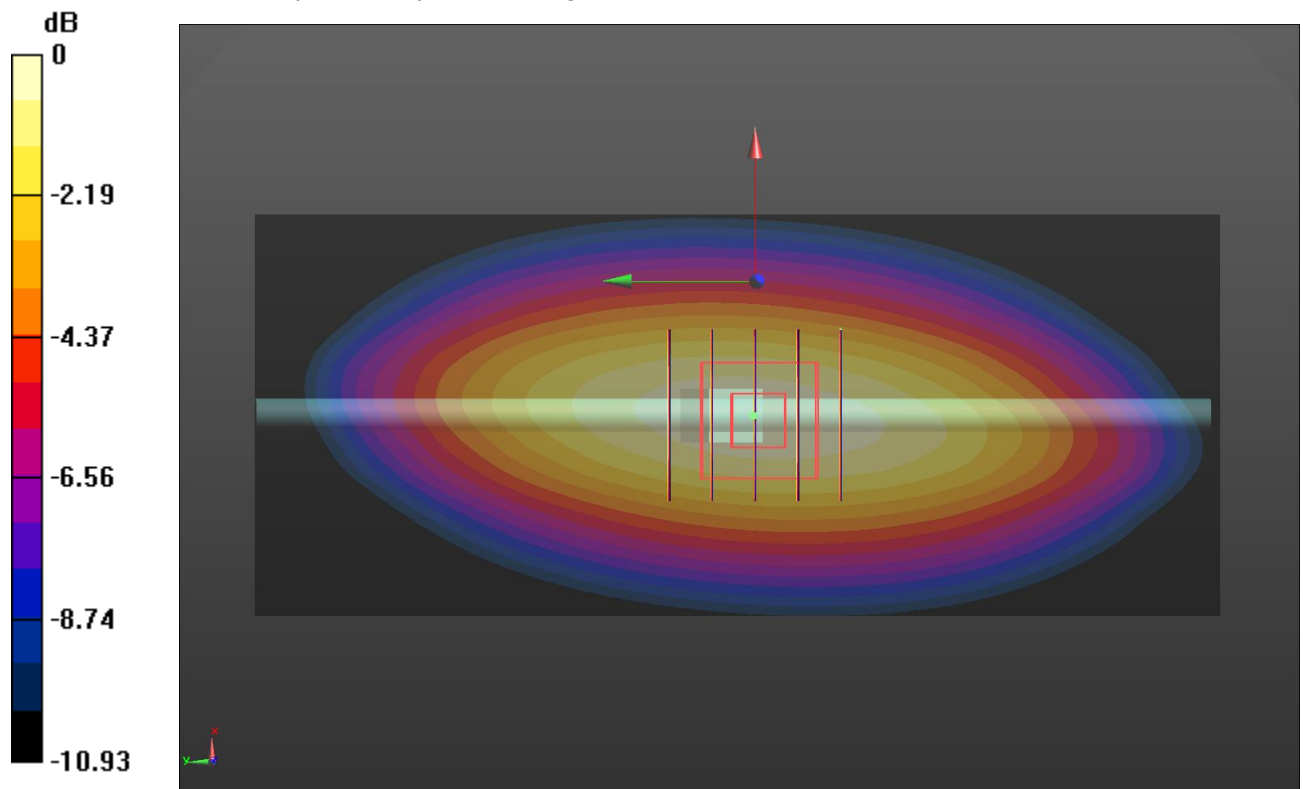

0 dB = 2.60 W/kg = 4.15 dBW/kg

System Performance Check-Head 835MHz

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2021-06-08

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 40.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.24 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 2.79 W/kg

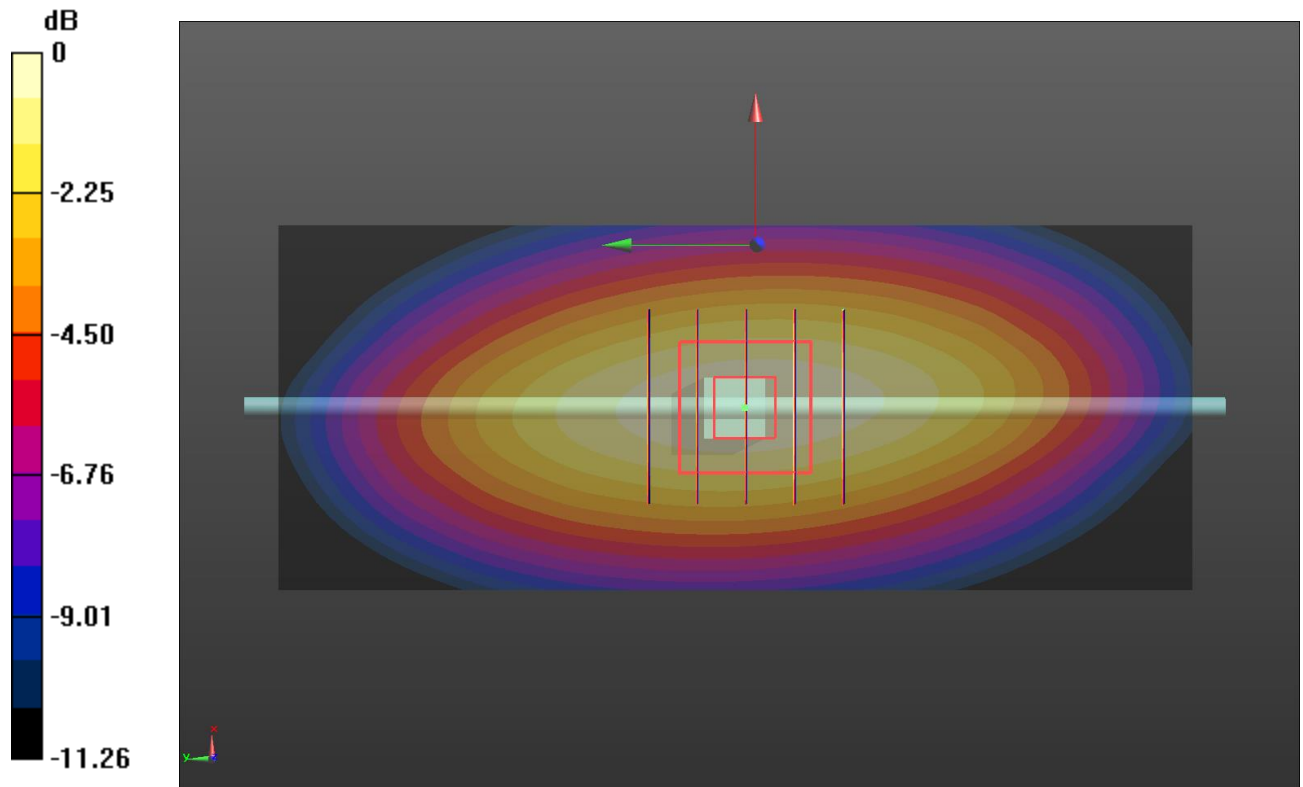

0 dB = 2.79 W/kg = 4.46 dBW/kg

System Performance Check-Head 1750MHz

DUT: D1750V2; Type: D1750V2; Serial: 1164

Date: 2021-06-09

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.81$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.0 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.35 W/kg; SAR(10 g) = 4.94 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

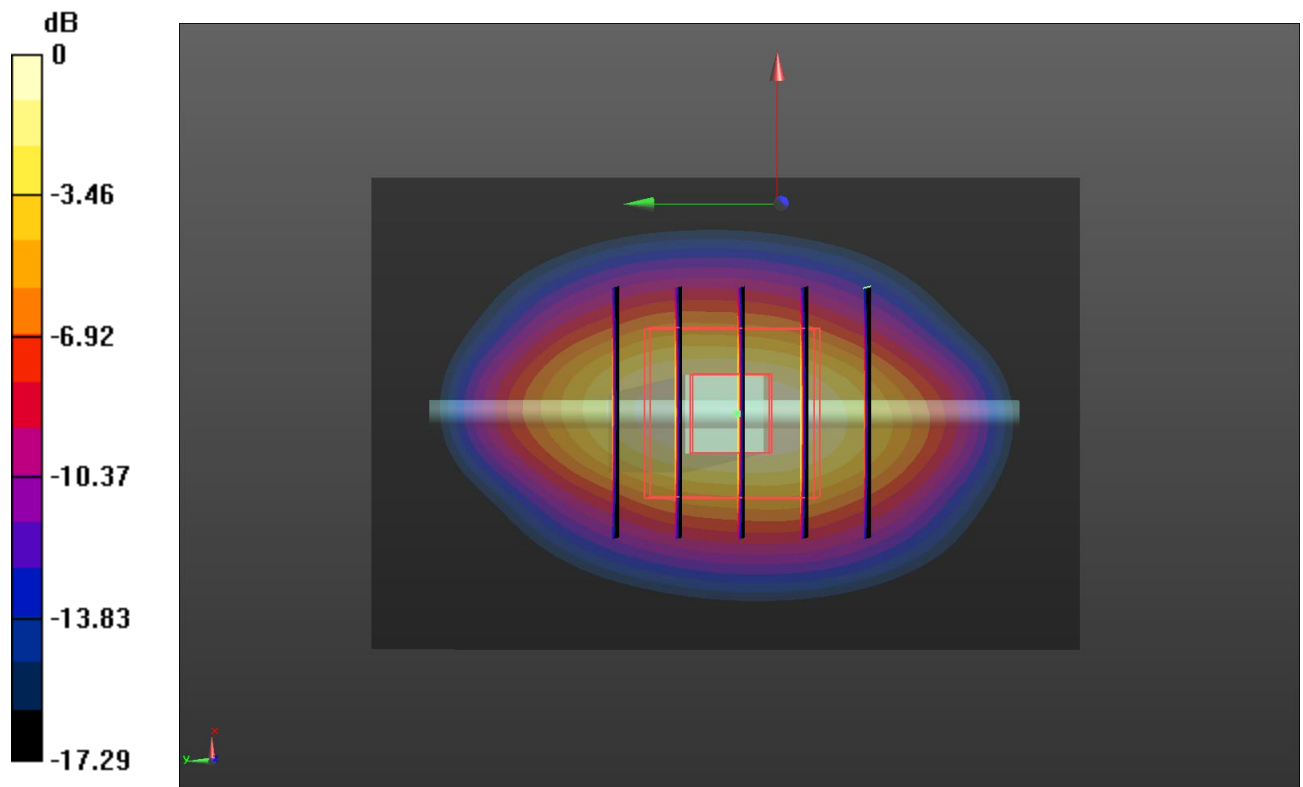

0 dB = 11.9 W/kg = 10.76 dBW/kg

System Performance Check-Head 1900MHz

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date: 2021-06-12

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 38.614$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C; Liquid Temperature: 22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.6 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.95 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 10.9 W/kg; SAR(10 g) = 5.57 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

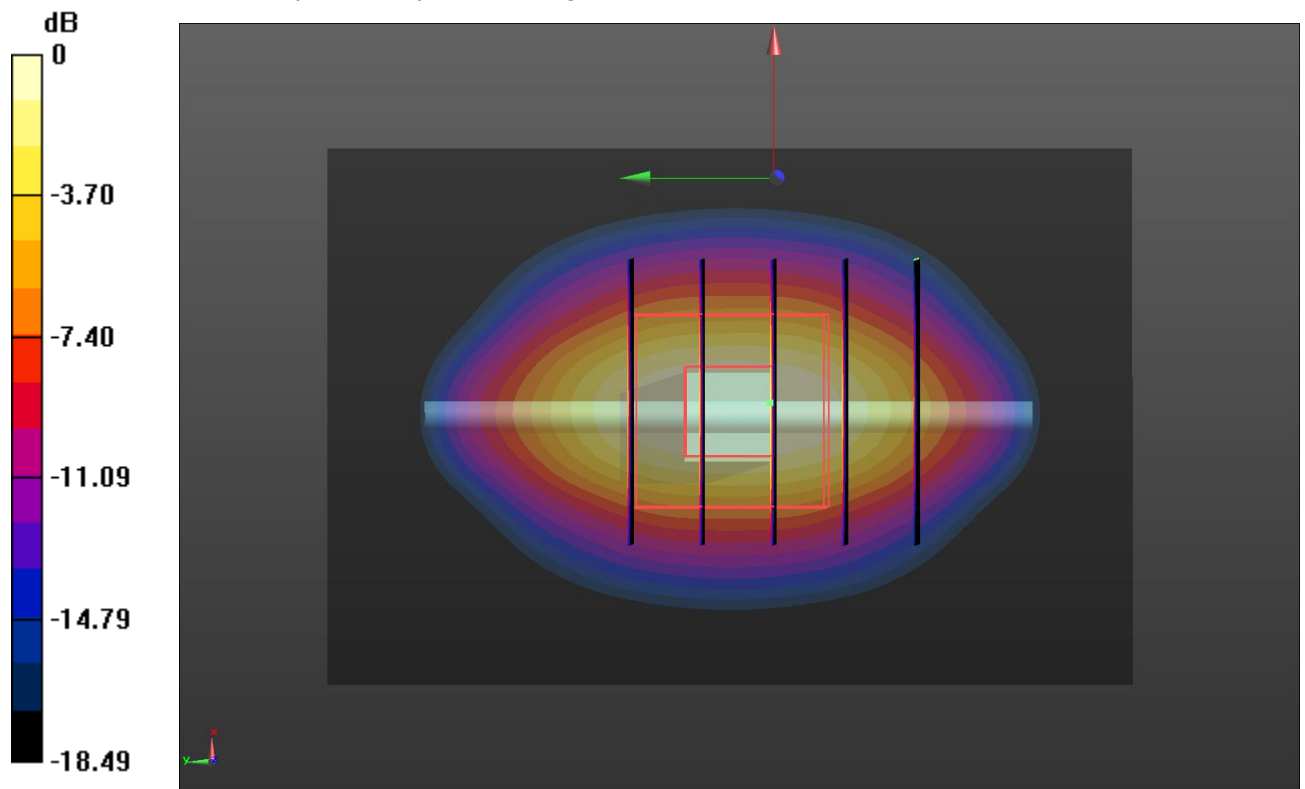

0 dB = 13.9 W/kg = 11.43 dBW/kg

SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-06-13

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 38.073$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C; Liquid Temperature: 22.5°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.5 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.38 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

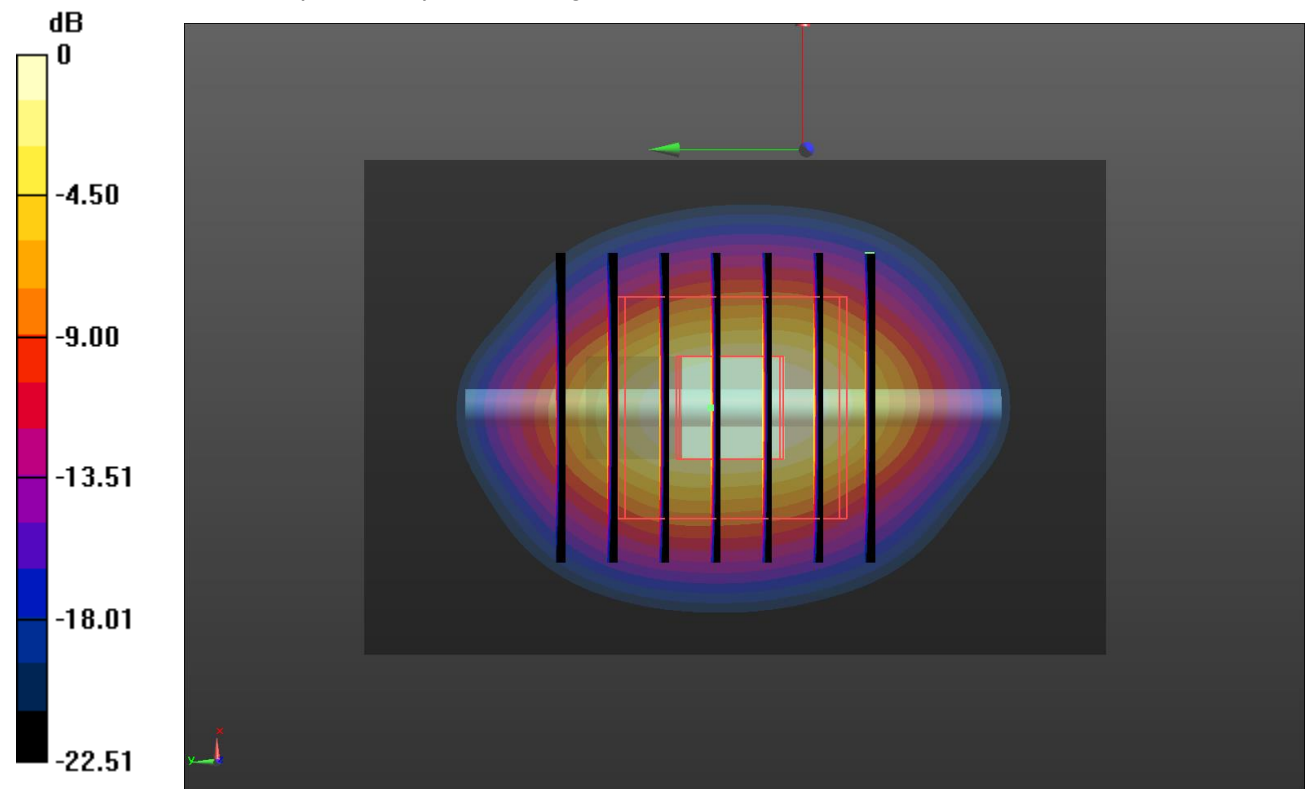

0 dB = 18.3 W/kg = 12.62 dBW/kg

SystemPerformanceCheck-Head 2600MHz

DUT: D2600V2; Type: D2600V2; Serial: 1150

Date: 2021-06-14

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 37.836$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C; Liquid Temperature: 22.6°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 28.4 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 15.4 W/kg; SAR(10 g) = 6.86 W/kg

Maximum value of SAR (measured) = 26.8 W/kg

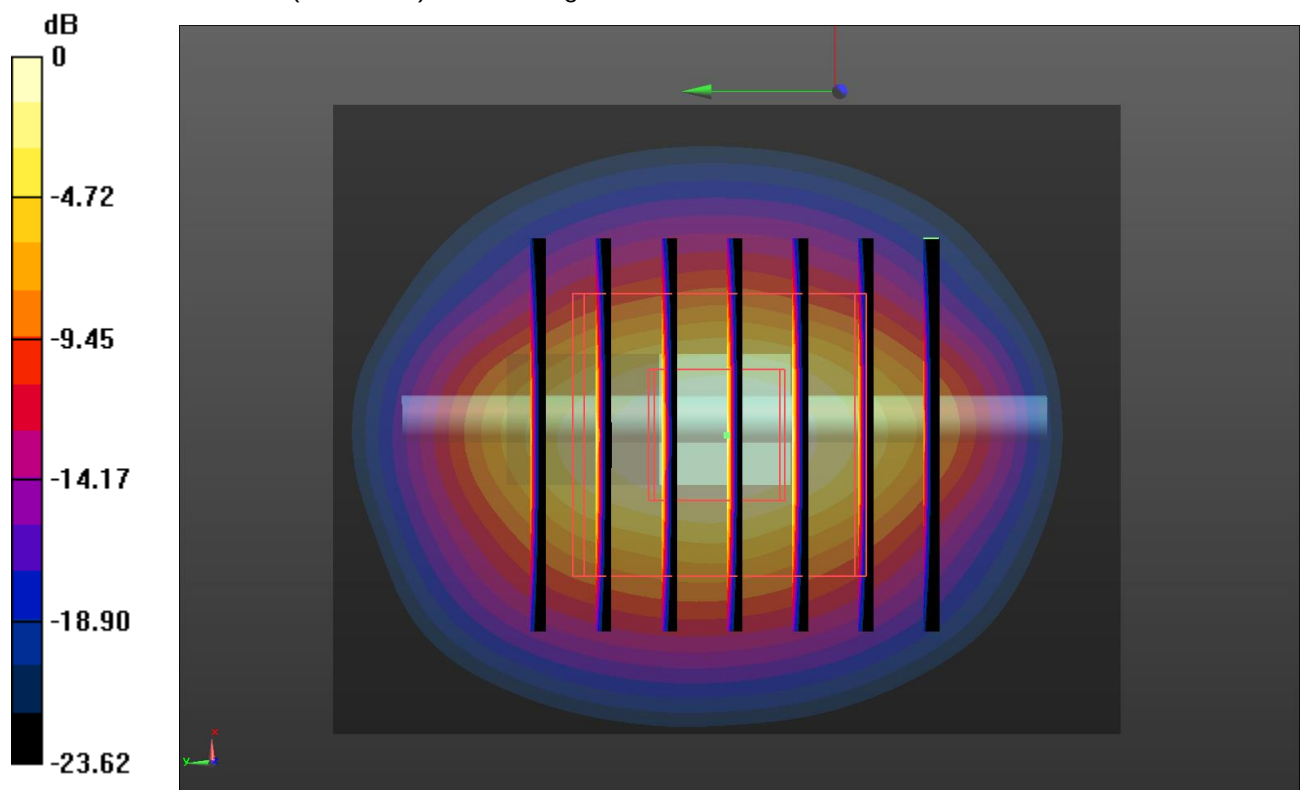

0 dB = 26.8 W/kg = 14.28 dBW/kg

SystemPerformanceCheck-Head 5250MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-06-13

Communication System: UID 0, Generic WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.554$ S/m; $\epsilon_r = 35.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C; Liquid Temperature: 22.5°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(5.65, 5.65, 5.65) @ 5250 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, pin=100mW/Area Scan (31x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 23.2 W/kg


Head/d=10mm, pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.86 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 8.55 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 20.5 W/kg

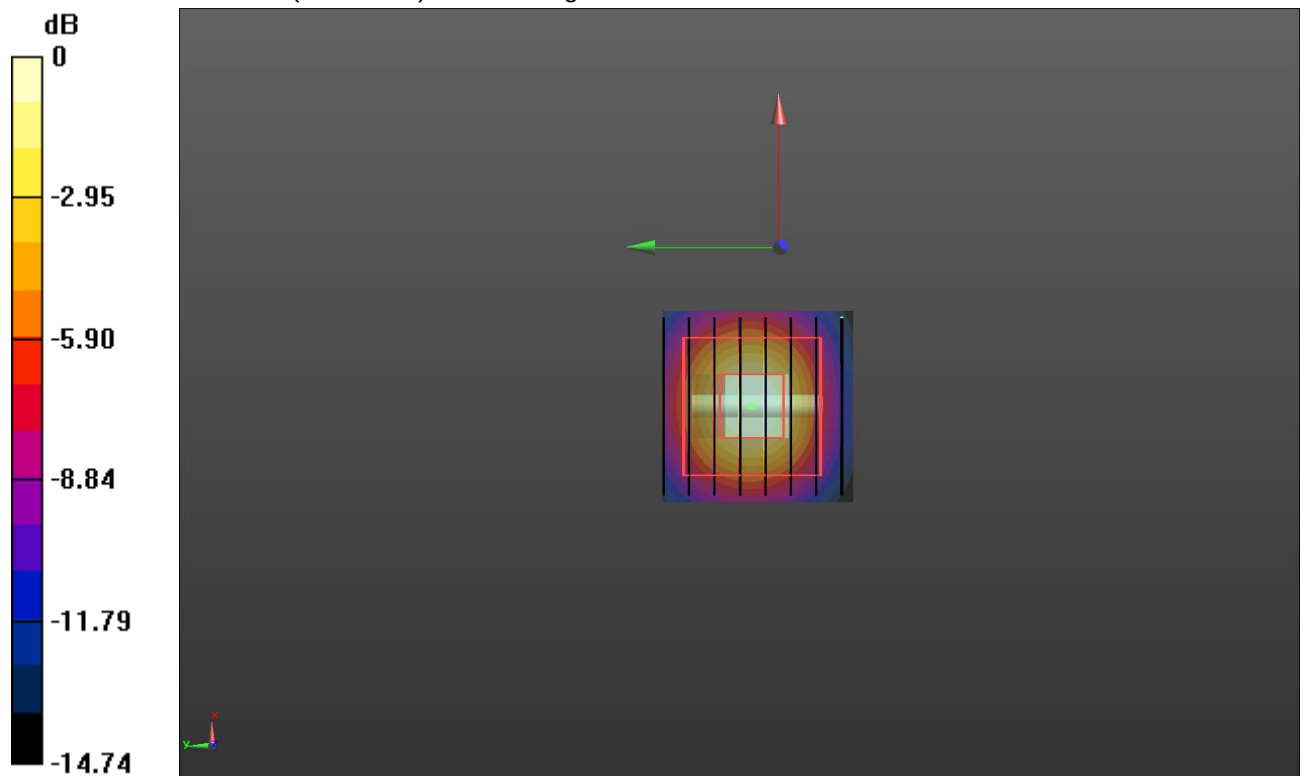

0 dB = 20.5 W/kg = 13.12 dBW/kg

SystemPerformanceCheck-Head 5750MHz

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1273

Date: 2021-06-13

Communication System: UID 0, Generic WIFI (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.134 \text{ S/m}$; $\epsilon_r = 34.343$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.7°C; Liquid Temperature: 22.5°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 29.0 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 80.40 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 43.4 W/kg

SAR(1 g) = 8.7 W/kg; SAR(10 g) = 2.47 W/kg

Maximum value of SAR (measured) = 25.3 W/kg

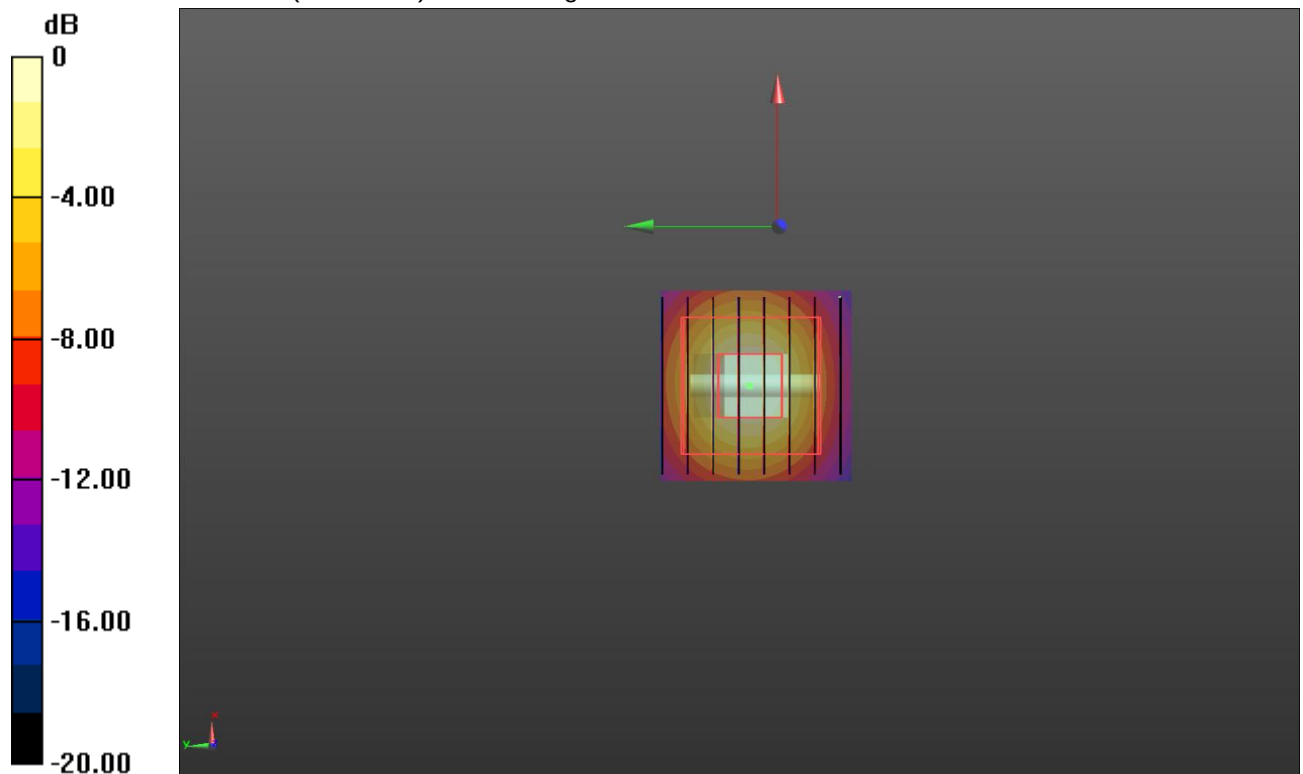

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

11. Conducted Power Measurement Results

11.1. WCDMA

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of the setting are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ED} (Note 5) (Note 6)	β_{ED} (SF)	β_{ED} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ED1} : 47/15 β_{ED2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
- Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
- Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
- Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 6: β_{ED} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band II			WCDMA Band IV		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH9262	CH9400	CH9538	CH1312	CH1413	CH1513
		1852.4MHz	1880MHz	1907.6MHz	1712.4MHz	1732.6MHz	1752.6MHz
AMR 12.2K		22.26	22.25	22.20	22.32	22.20	21.99
RMC 12.2K		22.29	22.28	22.23	22.35	22.23	22.02
HSDPA	Subtest-1	20.70	21.35	21.31	21.60	21.41	21.23
	Subtest-2	20.16	20.85	20.79	21.04	20.86	20.67
	Subtest-3	20.15	20.86	20.78	21.05	20.88	20.68
	Subtest-4	20.14	20.92	20.80	21.03	20.89	20.66
HSUPA	Subtest-1	19.27	19.26	19.20	19.42	19.30	19.10
	Subtest-2	19.80	19.73	19.66	19.94	19.81	19.60
	Subtest-3	20.28	20.23	20.18	20.47	20.28	20.08
	Subtest-4	19.34	19.32	19.24	19.49	19.38	19.11
	Subtest-5	21.26	21.24	21.14	21.45	21.32	21.14

Mode		WCDMA Band V		
		Conducted Power (dBm)		
		CH4132	CH4183	CH4233
		826.4MHz	836.6MHz	846.6MHz
AMR 12.2K		22.84	22.86	22.73
RMC 12.2K		22.87	22.89	22.76
HSDPA	Subtest-1	21.97	22.08	21.89
	Subtest-2	21.44	21.57	21.38
	Subtest-3	21.47	21.59	21.41
	Subtest-4	21.47	21.54	21.39
HSUPA	Subtest-1	19.90	20.08	19.81
	Subtest-2	20.39	20.53	20.34
	Subtest-3	20.91	21.06	20.81
	Subtest-4	19.92	20.04	19.83
	Subtest-5	21.91	22.02	21.81

11.2. LTE

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
 - LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
 - LTE Band 5 (824-849 MHz) is covered by LTE Band 26 (814-849 MHz)
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18607	18900	19193
				1850.7MHz	1880MHz	1909.3MHz
1.4MHz	QPSK	1	0	22.21	22.44	22.60
			2	22.24	22.49	22.74
			5	22.22	22.48	22.68
		3	0	22.36	22.60	22.75
			1	22.38	22.61	22.76
			3	22.39	22.60	22.84
		6	0	21.36	21.60	21.74
	16QAM	1	0	21.32	21.53	21.76
			2	21.48	21.81	21.92
			5	21.36	21.56	21.78
		3	0	21.25	21.50	21.71
			1	21.28	21.56	21.69
			3	21.28	21.49	21.72
		6	0	20.39	20.62	20.63
Band-width	Modulation	RB allocation	RB offset	18615	18900	19185
				1851.5MHz	1880MHz	1908.5MHz
3MHz	QPSK	1	0	22.48	22.72	22.78
			8	22.53	22.73	22.82
			14	22.51	22.76	22.83
		8	0	21.60	21.78	21.64
			4	21.58	21.76	21.80
			7	21.50	21.75	21.62
		15	0	21.54	21.71	21.38
	16QAM	1	0	21.67	21.66	21.98
			8	21.63	21.63	21.99
			14	21.69	21.66	21.96
		8	0	20.57	20.76	20.49
			4	20.56	20.76	20.55
			7	20.52	20.72	20.49
		15	0	20.48	20.65	20.38

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18625	18900	19175
				1852.5MHz	1880MHz	1907.5MHz
5MHz	QPSK	1	0	22.59	22.86	22.90
			12	22.71	22.97	23.04
			24	22.63	22.79	22.54
		12	0	21.65	21.91	21.61
			7	21.62	21.87	21.59
			13	21.51	21.76	21.40
		25	0	21.49	21.92	21.53
	16QAM	1	0	21.73	21.83	21.86
			12	21.91	21.97	21.73
			24	21.88	21.79	21.50
		12	0	20.73	20.95	20.70
			7	20.76	20.93	20.68
			13	20.68	20.82	20.41
		25	0	20.47	20.89	20.62
Band-width	Modulation	RB allocation	RB offset	18650	18900	19150
				1855MHz	1880MHz	1905MHz
10MHz	QPSK	1	0	22.66	22.91	22.99
			24	22.76	22.95	22.60
			49	22.53	22.60	22.58
		25	0	21.40	22.04	21.70
			24	21.46	22.02	21.65
			49	21.37	21.90	21.42
		50	0	21.36	22.02	21.55
	16QAM	1	0	21.74	21.81	21.82
			24	21.99	21.82	21.78
			49	21.58	21.41	21.77
		25	0	20.47	21.15	20.67
			24	20.49	21.17	20.68
			49	20.38	20.94	20.46
		50	0	20.45	21.01	20.57

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18675	18900	19125
				1857.5MHz	1880MHz	1902.5MHz
15MHz	QPSK	1	0	22.62	22.80	22.46
			38	22.75	22.64	22.52
			74	22.46	22.42	22.47
		38	0	21.34	21.23	21.57
			18	21.59	21.60	21.66
			37	21.49	21.32	21.64
		75	0	21.42	21.48	21.47
	16QAM	1	0	21.83	21.43	21.58
			38	22.06	21.46	21.68
			74	21.50	21.27	21.65
		38	0	21.38	21.26	21.60
			18	21.59	21.63	21.66
			37	21.50	21.31	21.66
		75	0	20.45	20.58	20.41
Band-width	Modulation	RB allocation	RB offset	18700	18900	19100
				1860MHz	1880MHz	1900MHz
20MHz	QPSK	1	0	22.44	22.39	22.71
			49	22.93	22.66	22.76
			99	22.61	22.21	22.40
		50	0	21.88	21.49	21.42
			25	21.88	21.87	21.42
			50	21.84	21.54	21.28
		100	0	21.55	21.61	21.40
	16QAM	1	0	21.53	21.07	21.34
			49	21.15	21.74	21.65
			99	21.75	21.26	21.42
		50	0	20.90	20.86	20.47
			25	20.87	20.97	20.46
			50	20.80	20.36	20.31
		100	0	20.52	20.74	20.39

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19957	20175	20393
				1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	21.68	21.93	22.09
			2	21.84	22.02	22.18
			5	21.82	21.90	22.12
		3	0	21.94	22.01	22.20
			1	21.94	22.00	22.21
			3	21.94	22.04	22.24
		6	0	20.93	21.05	21.19
	16QAM	1	0	20.93	21.08	21.27
			2	21.19	21.46	21.47
			5	21.06	21.09	21.31
		3	0	20.92	21.00	21.18
			1	20.94	21.03	21.18
			3	20.93	21.02	21.21
		6	0	19.99	19.89	20.07
Band-width	Modulation	RB allocation	RB offset	19965	20175	20385
				1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	21.19	21.43	21.59
			8	21.36	21.44	21.45
			14	21.31	21.45	21.44
		8	0	20.49	20.52	20.48
			4	20.61	20.53	20.42
			7	20.56	20.56	20.84
		15	0	20.51	20.53	20.83
	16QAM	1	0	20.45	20.67	20.52
			8	20.52	20.68	20.37
			14	20.43	20.64	20.38
		8	0	19.60	19.58	19.47
			4	19.65	19.56	19.70
			7	19.62	19.56	19.80
		15	0	19.55	19.48	19.74

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19975	20175	20375
				1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	21.95	21.99	22.02
			12	22.16	22.12	22.18
			24	22.01	21.99	22.03
		12	0	20.99	20.96	21.10
			7	21.03	21.00	21.11
			13	20.88	21.02	21.09
		25	0	21.10	21.05	21.16
	16QAM	1	0	21.21	20.98	21.07
			12	21.38	21.15	21.22
			24	21.22	21.07	21.09
		12	0	20.12	20.07	20.11
			7	20.09	20.09	20.12
			13	20.16	20.05	20.14
		25	0	20.08	20.08	20.19
Band-width	Modulation	RB allocation	RB offset	20000	20175	20350
				1715MHz	1732.5MHz	1750MHz
10MHz	QPSK	1	0	22.09	22.10	22.13
			24	22.18	22.33	22.32
			49	22.11	22.13	22.19
		25	0	21.18	21.24	21.28
			24	21.24	21.26	21.31
			49	21.27	21.18	21.36
		50	0	21.16	21.21	21.30
	16QAM	1	0	21.29	21.11	21.35
			24	21.49	21.21	21.46
			49	21.31	21.08	21.36
		25	0	20.25	20.26	20.30
			24	20.24	20.28	20.29
			49	20.28	20.26	20.36
		50	0	20.33	20.22	20.32

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20025	20175	20325
				1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	22.19	22.11	22.10
			38	22.31	22.25	22.25
			74	22.17	22.06	21.63
		38	0	21.10	21.35	21.47
			18	21.24	21.51	21.64
			37	21.04	21.35	21.53
		75	0	21.31	21.33	21.42
	16QAM	1	0	21.12	21.34	21.46
			38	21.27	21.46	21.62
			74	21.12	21.37	21.53
		38	0	21.13	21.35	21.43
			18	21.23	21.46	21.60
			37	21.10	21.36	21.56
		75	0	20.33	20.28	20.33
Band-width	Modulation	RB allocation	RB offset	20050	20175	20300
				1720MHz	1732.5MHz	1745MHz
20MHz	QPSK	1	0	22.03	21.85	22.00
			49	22.39	22.25	22.48
			99	21.98	21.87	22.14
		50	0	21.27	21.28	21.28
			25	21.28	21.30	21.27
			50	21.35	21.29	21.37
		100	0	21.30	21.28	21.30
	16QAM	1	0	21.28	21.02	21.07
			49	21.63	21.46	21.58
			99	21.21	21.04	21.15
		50	0	20.26	20.39	20.27
			25	20.28	20.36	20.31
			50	20.36	20.35	20.35
		100	0	20.33	20.29	20.29

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20407	20525	20643
				8.4.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	23.14	23.09	23.19
			2	23.26	23.27	23.32
			5	23.21	23.11	23.17
		3	0	23.24	23.18	23.23
			1	23.22	23.21	23.24
			3	23.25	23.24	23.22
		6	0	22.23	22.23	22.27
	16QAM	1	0	22.23	22.22	22.25
			2	22.53	22.37	22.44
			5	22.28	22.26	22.25
		3	0	22.11	22.10	22.12
			1	22.15	22.09	22.14
			3	22.16	22.04	22.09
		6	0	21.09	21.05	21.23
Band-width	Modulation	RB allocation	RB offset	20415	20525	20635
				825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	23.19	23.21	23.15
			8	23.24	23.24	23.20
			14	23.23	23.22	23.16
		8	0	22.20	22.21	22.28
			4	22.21	22.22	22.24
			7	22.22	22.21	22.24
		15	0	22.17	22.17	22.18
	16QAM	1	0	22.34	22.07	22.34
			8	22.34	22.13	22.32
			14	22.31	22.06	22.28
		8	0	21.17	21.15	21.26
			4	21.16	21.16	21.24
			7	21.19	21.17	21.20
		15	0	21.06	21.01	21.17

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20425	20525	20625
				826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	23.17	23.21	23.18
			12	23.33	23.33	23.30
			24	23.16	23.15	23.14
		12	0	22.13	22.04	22.21
			7	22.17	22.02	22.29
			13	22.15	22.14	22.13
		25	0	22.20	22.11	22.18
	16QAM	1	0	22.33	22.11	22.15
			12	22.48	22.26	22.29
			24	22.28	22.16	22.10
		12	0	21.20	21.03	21.17
			7	21.20	20.99	21.21
			13	21.16	21.13	21.07
		25	0	21.13	21.08	21.17
Band-width	Modulation	RB allocation	RB offset	20450	20525	20600
				829MHz	836.5MHz	844MHz
10MHz	QPSK	1	0	23.25	23.20	23.15
			24	23.35	23.29	23.32
			49	23.25	23.21	23.16
		25	0	22.32	22.09	22.35
			24	22.33	22.13	22.36
			49	22.40	22.21	22.17
		50	0	22.33	22.13	22.27
	16QAM	1	0	22.15	22.33	22.34
			24	22.23	22.41	22.47
			49	22.11	22.32	22.28
		25	0	21.30	21.04	21.29
			24	21.31	21.04	21.30
			49	21.38	21.17	21.10
		50	0	21.30	21.09	21.14

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20775	21100	21425
				2502.5MHz	2535MHz	2567.5MHz
5MHz	QPSK	1	0	22.56	23.04	23.16
			12	22.76	23.22	23.28
			24	22.64	23.08	23.20
		12	0	21.66	21.98	22.21
			7	21.64	21.98	22.24
			13	21.73	22.04	22.25
		25	0	21.75	22.00	22.28
	16QAM	1	0	21.74	21.87	22.08
			12	21.93	21.98	22.23
			24	21.87	21.93	22.13
		12	0	20.71	20.94	21.18
			7	20.68	20.94	21.22
			13	20.83	21.01	21.25
		25	0	20.73	20.95	21.23
Band-width	Modulation	RB allocation	RB offset	20800	21100	21400
				2505MHz	2535MHz	2565MHz
10MHz	QPSK	1	0	22.59	23.03	23.09
			24	22.84	23.20	23.34
			49	22.73	23.01	23.15
		25	0	21.73	22.01	22.31
			24	21.73	21.99	22.31
			49	21.88	22.15	22.36
		50	0	21.80	22.06	22.34
	16QAM	1	0	21.76	21.83	22.26
			24	21.99	22.05	22.39
			49	21.89	21.89	22.28
		25	0	20.72	20.93	21.24
			24	20.71	20.95	21.25
			49	20.88	21.10	21.32
		50	0	20.81	21.01	21.30

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20825	21100	21375
				2507.5MHz	2535MHz	2562.5MHz
15MHz	QPSK	1	0	22.63	22.96	22.98
			38	22.76	23.10	23.17
			74	22.78	22.93	23.11
		38	0	21.81	21.80	22.19
			18	22.06	21.93	22.37
			37	21.99	21.84	22.26
		75	0	21.88	22.28	22.48
	16QAM	1	0	21.82	21.81	22.19
			38	22.04	21.94	22.34
			74	21.98	21.84	22.26
		38	0	21.81	21.81	22.20
			18	22.02	21.95	22.37
			37	22.00	21.83	22.27
		75	0	20.80	21.12	21.33
Band-width	Modulation	RB allocation	RB offset	20850	21100	21350
				2510MHz	2535MHz	2560MHz
20MHz	QPSK	1	0	22.46	22.68	22.85
			49	22.89	23.18	23.40
			99	22.72	22.67	23.08
		50	0	21.73	21.91	22.32
			25	21.69	21.90	22.31
			50	21.70	22.22	22.28
		100	0	21.67	22.12	22.27
	16QAM	1	0	21.54	21.62	21.89
			49	22.04	22.09	22.41
			99	21.74	21.77	22.05
		50	0	20.71	20.87	21.29
			25	20.72	20.90	21.30
			50	20.68	21.23	21.23
		100	0	20.68	21.03	21.26

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23017	23095	23173
				699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	23.15	23.20	23.22
			2	23.22	23.34	23.38
			5	23.21	23.20	23.29
		3	0	23.19	23.21	23.18
			1	23.21	23.23	23.18
			3	23.24	23.22	23.19
		6	0	22.38	22.35	22.40
	16QAM	1	0	22.25	22.24	22.21
			2	22.41	22.41	22.37
			5	22.28	22.26	22.20
		3	0	22.10	22.12	22.09
			1	22.10	22.14	22.11
			3	22.17	22.15	22.07
		6	0	21.17	21.14	21.17
Band-width	Modulation	RB allocation	RB offset	23025	23095	23165
				700.5MHz	707.5MHz	714.5MHz
3MHz	QPSK	1	0	22.98	23.11	22.98
			8	23.04	23.05	23.04
			14	23.07	23.07	23.07
		8	0	22.14	22.16	22.14
			4	22.17	22.16	22.17
			7	22.18	22.14	22.18
		15	0	22.13	22.10	22.13
	16QAM	1	0	22.19	22.21	21.92
			8	22.16	22.16	21.95
			14	22.11	22.15	21.91
		8	0	21.12	21.09	21.03
			4	21.15	21.10	21.04
			7	21.14	21.07	21.07
		15	0	21.12	20.95	20.89

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23035	23095	23155
				701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	23.07	23.02	22.96
			12	23.16	23.13	23.06
			24	23.00	23.01	23.01
		12	0	22.12	22.03	22.09
			7	22.14	22.00	22.08
			13	22.17	22.06	22.04
		25	0	22.16	22.02	22.09
	16QAM	1	0	22.19	22.00	21.94
			12	22.25	22.09	21.98
			24	22.15	22.07	21.93
		12	0	21.13	20.96	21.06
			7	21.13	20.99	21.06
			13	21.15	21.02	20.98
		25	0	21.08	20.99	21.05
Band-width	Modulation	RB allocation	RB offset	23060	23095	23130
				704MHz	707.5MHz	711MHz
10MHz	QPSK	1	0	23.11	23.04	23.07
			24	23.19	23.14	23.15
			49	23.08	23.04	23.15
		25	0	22.13	21.99	22.22
			24	22.11	22.00	22.21
			49	22.25	22.05	22.08
		50	0	22.19	22.01	22.08
	16QAM	1	0	22.01	22.16	22.18
			24	22.10	22.28	22.27
			49	22.00	22.17	22.11
		25	0	21.11	20.91	21.16
			24	21.11	20.93	21.16
			49	21.21	21.03	21.05
		50	0	21.12	20.97	21.05

LTE-FDD Band 17				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23755	23790	23825
				706.5MHz	710MHz	713.5MHz
5MHz	QPSK	1	0	23.22	23.25	23.29
			12	23.33	23.34	23.42
			24	23.21	23.22	23.31
		12	0	22.21	22.29	22.31
			7	22.23	22.29	21.36
			13	22.29	22.19	21.63
		25	0	22.28	22.26	21.33
	16QAM	1	0	22.09	22.34	22.20
			12	22.27	22.47	22.26
			24	22.14	22.32	22.13
		12	0	21.12	21.28	21.29
			7	21.14	21.31	20.33
			13	21.20	21.19	20.63
		25	0	21.19	21.20	20.69
Band-width	Modulation	RB allocation	RB offset	23780	23790	23800
				709MHz	710MHz	711MHz
10MHz	QPSK	1	0	23.21	23.20	23.22
			24	23.33	23.32	23.37
			49	23.22	23.20	23.24
		25	0	22.18	22.24	22.32
			24	22.18	22.24	22.31
			49	22.15	22.12	22.24
		50	0	22.16	22.17	22.26
	16QAM	1	0	22.08	22.26	22.21
			24	22.26	22.48	22.40
			49	22.09	22.19	22.15
		25	0	21.15	21.13	21.25
			24	21.11	21.15	21.22
			49	21.11	21.07	21.19
		50	0	21.07	21.08	21.20

LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplinkdownlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	U	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used-configuration 0 at 63.3% duty cycle.

LTE-TDD Band 38				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	37775	38000	38225
				2572.5MHz	2595MHz	2617.5MHz
5MHz	QPSK	1	0	22.86	22.92	22.77
			12	22.98	23.06	22.88
			24	22.90	22.94	22.73
		12	0	21.95	22.01	21.87
			7	21.92	21.99	21.86
			13	21.90	21.98	21.83
		25	0	21.95	22.00	21.85
	16QAM	1	0	22.10	21.96	21.75
			12	22.22	22.06	21.86
			24	22.13	21.94	21.74
		12	0	20.99	21.05	20.84
			7	20.99	21.05	20.82
			13	20.96	20.99	20.77
		25	0	20.93	21.06	20.81
Band-width	Modulation	RB allocation	RB offset	37800	38000	38200
				2575MHz	2595MHz	2615MHz
10MHz	QPSK	1	0	22.96	23.04	22.88
			24	23.28	23.30	23.15
			49	23.05	23.01	22.81
		25	0	22.03	22.11	21.90
			24	22.02	22.12	21.89
			49	22.05	22.05	21.93
		50	0	22.03	22.10	21.92
	16QAM	1	0	22.04	21.91	22.01
			24	22.36	22.17	22.23
			49	22.11	21.91	21.94
		25	0	21.52	21.13	21.69
			24	21.06	21.13	21.67
			49	21.02	21.52	21.63
		50	0	21.02	21.09	20.89

LTE-TDD Band 38				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	37825	38000	38175
				2577.5MHz	2595MHz	2612.5MHz
15MHz	QPSK	1	0	22.90	22.96	22.88
			38	23.03	23.05	22.91
			74	22.97	22.91	22.73
		38	0	22.09	21.88	21.96
			18	22.18	21.94	22.01
			37	22.15	21.79	21.86
		75	0	22.05	22.14	22.02
	16QAM	1	0	22.11	21.91	21.99
			38	22.22	21.97	21.99
			74	22.15	21.82	21.87
		38	0	22.09	21.86	21.95
			18	22.23	21.94	21.98
			37	22.13	21.77	21.86
		75	0	20.98	21.03	20.87
Band-width	Modulation	RB allocation	RB offset	37850	38000	38150
				2580MHz	2595MHz	2610MHz
20MHz	QPSK	1	0	22.78	22.77	22.71
			49	23.34	23.25	23.15
			99	22.88	22.69	22.59
		50	0	22.01	22.04	21.89
			25	22.03	22.06	21.88
			50	21.98	22.00	21.87
		100	0	22.02	22.03	21.89
	16QAM	1	0	22.00	21.75	21.73
			49	22.57	22.21	22.10
			99	22.09	21.66	21.61
		50	0	21.03	21.11	20.84
			25	20.68	21.12	20.83
			50	20.68	21.00	20.83
		100	0	21.01	20.98	20.85

LTE-TDD Band 41				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	40265	40740	41215
				2557.5MHz	2605MHz	2652.5MHz
5MHz	QPSK	1	0	22.05	22.19	21.80
			12	22.21	22.25	21.89
			24	22.12	22.19	21.96
		12	0	21.08	21.19	21.11
			7	21.06	21.13	21.06
			13	21.10	21.14	21.09
		25	0	21.07	21.21	21.07
	16QAM	1	0	21.27	21.18	20.80
			12	21.39	21.23	20.92
			24	21.34	21.17	21.04
		12	0	20.12	20.19	20.06
			7	20.13	20.14	20.05
			13	20.11	20.16	20.04
		25	0	20.03	20.24	20.07
Band-width	Modulation	RB allocation	RB offset	40290	40740	41190
				2560MHz	2605MHz	2650MHz
10MHz	QPSK	1	0	22.17	22.30	22.01
			24	22.54	22.61	22.34
			49	22.26	22.24	22.02
		25	0	21.11	21.33	21.14
			24	21.11	21.34	21.17
			49	21.23	21.29	21.12
		50	0	21.24	21.32	21.17
	16QAM	1	0	21.19	21.22	21.19
			24	21.56	21.41	21.54
			49	21.29	21.11	21.25
		25	0	21.52	21.51	21.69
			24	21.13	21.33	21.67
			49	21.23	21.52	21.63
		50	0	21.16	21.33	21.12

LTE-TDD Band 41				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	40315	40740	41165
				2562.5MHz	2605MHz	2647.5MHz
15MHz	QPSK	1	0	22.23	22.28	22.41
			38	22.35	22.34	22.08
			74	22.25	22.12	22.35
		38	0	21.30	21.13	21.15
			18	21.53	21.17	21.30
			37	21.40	21.05	21.15
		75	0	21.22	21.39	21.19
	16QAM	1	0	21.28	21.13	21.15
			38	21.50	21.17	21.29
			74	21.41	21.05	21.13
		38	0	21.27	21.14	21.13
			18	21.52	21.21	21.30
			37	21.39	21.02	21.14
		75	0	20.21	20.31	20.06
Band-width	Modulation	RB allocation	RB offset	40340	40740	41140
				2565MHz	2605MHz	2645MHz
20MHz	QPSK	1	0	22.04	22.14	21.89
			49	22.72	22.61	22.43
			99	22.24	22.03	21.94
		50	0	21.23	21.41	21.14
			25	21.24	21.39	21.15
			50	21.35	21.37	21.20
		100	0	21.30	21.38	21.19
	16QAM	1	0	21.26	21.08	20.94
			49	21.89	21.56	21.52
			99	21.45	21.04	21.00
		50	0	20.25	20.44	20.10
			25	20.68	20.43	20.10
			50	20.68	20.41	20.14
		100	0	20.29	20.37	20.13

11.3. Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Wi-Fi 2.4G				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
802.11b	1	2412	10.88	8.34
	6	2437	11.16	8.67
	11	2462	16.36	13.81
802.11g	1	2412	11.52	9.05
	6	2437	12.36	10.04
	11	2462	16.49	14.15
802.11n (HT20)	1	2412	11.24	8.72
	6	2437	12.39	9.80
	11	2462	16.39	14.10
802.11n (HT40)	3	2422	10.4	7.82
	6	2437	12.34	9.07
	9	2452	12.63	10.16

Wi-Fi 5G U-NII-1			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11ac (VHT20)	36	5180	13.62
	40	5200	14.48
	48	5240	15.38
802.11n (HT20)	36	5180	13.35
	40	5200	14.52
	48	5240	15.23
802.11a	36	5180	13.44
	40	5200	14.35
	48	5240	15.33
802.11ac (VHT40)	38	5190	12.00
	46	5230	13.34
802.11n (HT40)	38	5190	13.03
	46	5230	14.19

Wi-Fi 5G U-NII-3			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11ac (VHT20)	149	5745	14.37
	157	5785	14.14
	165	5825	14.16
802.11n (HT20)	149	5745	14.22
	157	5785	14.20
	165	5825	14.15
802.11a	149	5745	14.29
	157	5785	14.08
	165	5825	14.19
802.11ac (VHT40)	151	5755	13.68
	159	5795	13.64
802.11n (HT40)	151	5755	13.72
	159	5795	13.70

11.4. Bluetooth

Bluetooth				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
GFSK	0	2402	-1.40	-1.41
	39	2441	-6.87	-6.89
	78	2480	-4.92	-4.95
$\pi/4$ QPSK	0	2402	-2.00	-2.50
	39	2441	-7.36	-7.78
	78	2480	-5.41	-5.82
8DPSK	0	2402	-2.25	-2.68
	39	2441	-7.25	-7.64
	78	2480	-5.27	-5.72
BLE	0	2402	-1.36	-1.37
	19	2440	-6.99	-7.00
	39	2480	-4.86	-4.88

12. Maximum Tune-up Limit

WCDMA			
Mode	Maximum Tune-up (dBm)		
	FDD Band II	FDD Band IV	FDD Band V
AMR 12.2Kbps	22.50	22.50	23.00
RMC 12.2Kbps	22.50	22.50	23.00
HSDPA Subtest-1	21.50	22.00	22.50
HSDPA Subtest-2	21.00	21.50	22.00
HSDPA Subtest-3	21.00	21.50	22.00
HSDPA Subtest-4	21.00	21.50	22.00
HSUPA Subtest-1	19.50	19.50	20.50
HSUPA Subtest-2	20.00	20.00	21.00
HSUPA Subtest-3	20.50	20.50	21.50
HSUPA Subtest-4	19.50	19.50	20.50
HSUPA Subtest-5	21.50	21.50	22.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 2	1.4	QPSK	1	23.00
			3	23.00
			6	22.00
		16QAM	1	22.00
			3	22.00
			6	21.00
	3	QPSK	1	23.00
			8	22.00
			15	22.00
		16QAM	1	22.00
			8	21.00
			15	21.00
	5	QPSK	1	23.50
			12	22.00
			25	22.00
		16QAM	1	22.00
			12	21.00
			25	21.00
	10	QPSK	1	23.00
			25	22.50
			50	22.50
		16QAM	1	22.00
			25	21.50
			50	21.50
	15	QPSK	1	23.00
			38	22.00
			75	21.50
		16QAM	1	22.50
			38	22.00
			75	21.00
	20	QPSK	1	23.00
			50	22.00
			100	22.00
		16QAM	1	22.00
			50	21.00
			100	21.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 4	1.4	QPSK	1	22.50
			3	22.50
			6	21.50
		16QAM	1	21.50
			3	21.50
			6	20.50
	3	QPSK	1	22.00
			8	21.00
			15	21.00
		16QAM	1	21.00
			8	20.00
			15	20.00
	5	QPSK	1	22.50
			12	21.50
			25	21.50
		16QAM	1	21.50
			12	20.50
			25	20.50
	10	QPSK	1	22.50
			25	21.50
			50	21.50
		16QAM	1	21.50
			25	20.50
			50	20.50
	15	QPSK	1	22.50
			38	22.00
			75	21.50
		16QAM	1	22.00
			38	22.00
			75	20.50
	20	QPSK	1	22.50
			50	21.50
			100	21.50
		16QAM	1	22.00
			50	20.50
			100	20.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 5	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	23.00
			3	22.50
			6	21.50
	3	QPSK	1	23.50
			8	22.50
			15	22.50
		16QAM	1	22.50
			8	21.50
			15	21.50
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 7	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50
	15	QPSK	1	23.50
			38	22.50
			75	22.50
		16QAM	1	22.50
			38	22.50
			75	21.50
	20	QPSK	1	23.50
			50	22.50
			100	22.50
		16QAM	1	22.50
			50	21.50
			100	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 12	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.50
			3	22.50
			6	21.50
	3	QPSK	1	23.50
			8	22.50
			15	22.50
		16QAM	1	22.50
			8	21.50
			15	21.50
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 17	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
TDD Band 38	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.50
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	22.00
			50	21.50
	15	QPSK	1	23.50
			38	22.50
			75	22.50
		16QAM	1	22.50
			38	22.50
			75	21.50
	20	QPSK	1	23.50
			50	22.50
			100	22.50
		16QAM	1	23.00
			50	21.50
			100	21.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
TDD Band 41	5	QPSK	1	22.50
			12	21.50
			25	21.50
		16QAM	1	21.50
			12	20.50
			25	20.50
	10	QPSK	1	23.00
			25	21.50
			50	21.50
		16QAM	1	22.00
			25	22.00
			50	21.50
	15	QPSK	1	22.50
			38	22.00
			75	21.50
		16QAM	1	22.00
			38	22.00
			75	20.50
	20	QPSK	1	23.00
			50	21.50
			100	21.50
		16QAM	1	22.00
			50	21.00
			100	20.50

The allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≤ 1						≤ 5

Wi-Fi 2.4G		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11b	1	8.50
	6	9.00
	11	14.00
802.11g	1	9.50
	6	10.50
	11	14.50
802.11n(HT20)	1	9.00
	6	10.00
	11	14.50
802.11n(HT40)	3	8.00
	6	9.50
	9	10.50

Wi-Fi 5G U-NII-1		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11ac (VHT20)	36	14.00
	40	14.50
	48	15.50
802.11n (HT20)	36	13.50
	40	15.00
	48	15.50
802.11a	36	13.50
	40	14.50
	48	15.50
802.11ac (VHT40)	38	12.00
	46	13.50
802.11n (HT40)	38	13.50
	46	14.50

Wi-Fi 5G U-NII-3		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11ac (VHT20)	149	14.50
	157	14.50
	165	14.50
802.11n (HT20)	149	14.50
	157	14.50
	165	14.50
802.11a	149	14.50
	157	14.50
	165	14.50
802.11ac (VHT40)	151	14.00
	159	14.00
802.11n (HT40)	151	14.00
	159	14.00

Bluetooth		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
GFSK	0	-1.00
	39	-6.50
	78	-4.50
$\pi/4$ QPSK	0	-2.50
	39	-7.50
	78	-5.50
8DPSK	0	-2.50
	39	-7.50
	78	-5.50
BLE	0	-1.00
	19	-7.00
	39	-4.50

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by:


$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.402	Body	5	0.1	0.033

Per KDB 447498 D01, when the minimum test separation distance is $< 5\text{mm}$, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. Antenna Location

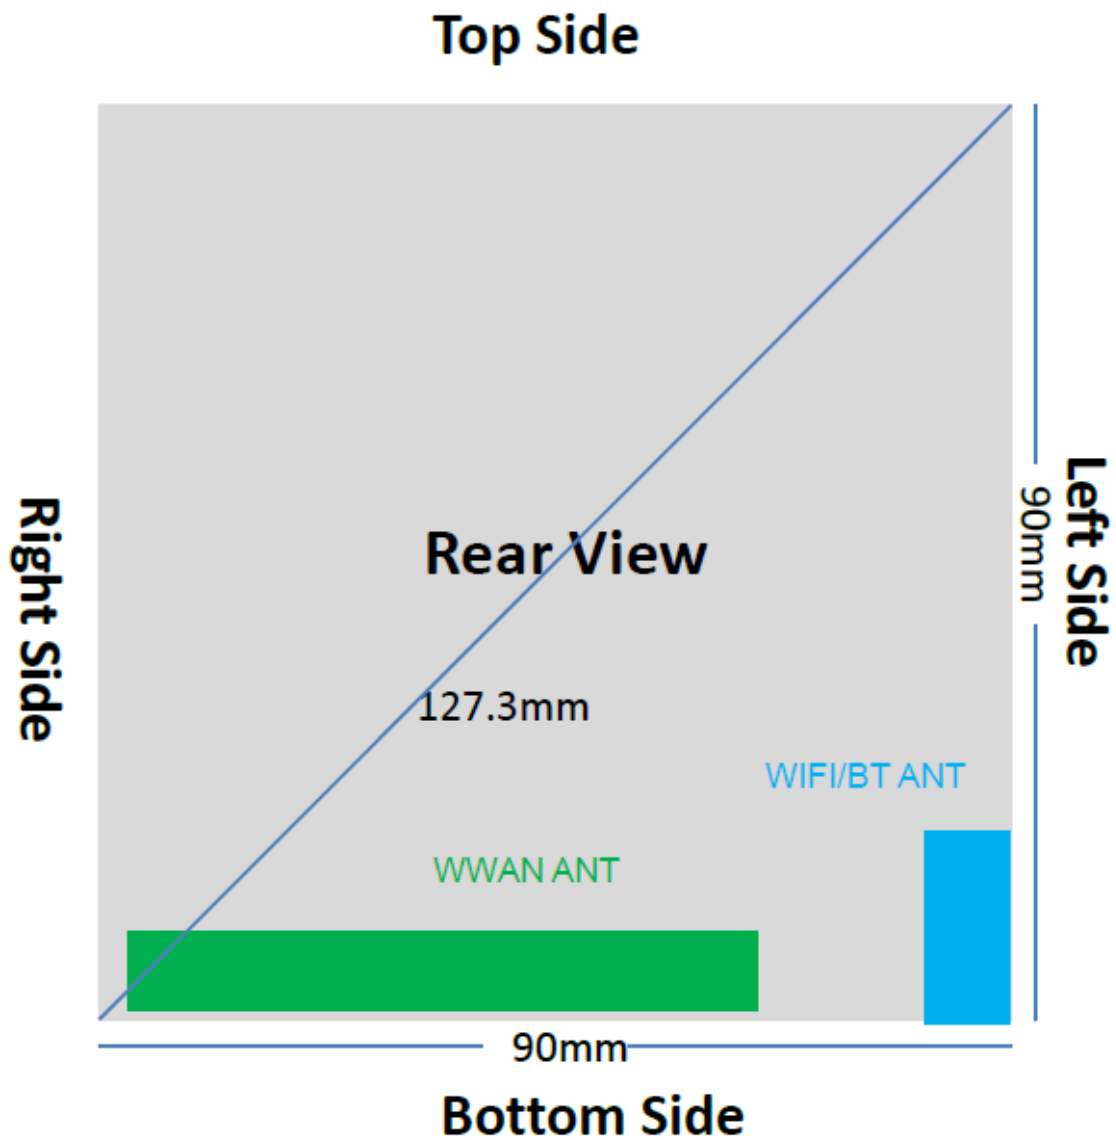

14. Measured and Reported SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G SAR Test Reduction Procedure:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

W-CDMA Guidance

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC (Head) and other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC (Body-Worn Accessory) as the primary mode.

SAR measurement is not required for the HSDPA, HSUPA, DC-HSDPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	9262	1852.4	22.29	22.50	1.050	-0.04	0.681	0.715	-
		9400	1880	22.28	22.50	1.052	-	-	-	-
		9538	1907.6	22.23	22.50	1.064	-	-	-	-
	Rear	9262	1852.4	22.29	22.50	1.050	-0.11	1.000	1.050	1
		9400	1880	22.28	22.50	1.052	-0.19	0.982	1.033	-
		9538	1907.6	22.23	22.50	1.064	-0.02	0.897	0.955	-
	Left	9262	1852.4	22.29	22.50	1.050	-0.10	0.250	0.262	-
		9400	1880	22.28	22.50	1.052	-	-	-	-
		9538	1907.6	22.23	22.50	1.064	-	-	-	-
	Right	9262	1852.4	22.29	22.50	1.050	-0.19	0.175	0.184	-
		9400	1880	22.28	22.50	1.052	-	-	-	-
		9538	1907.6	22.23	22.50	1.064	-	-	-	-
	Top	9262	1852.4	22.29	22.50	1.050	0.15	0.085	0.089	-
		9400	1880	22.28	22.50	1.052	-	-	-	-
		9538	1907.6	22.23	22.50	1.064	-	-	-	-
	Bottom	9262	1852.4	22.29	22.50	1.050	0.02	0.315	0.331	-
		9400	1880	22.28	22.50	1.052	-	-	-	-
		9538	1907.6	22.23	22.50	1.064	-	-	-	-

WCDMA Band IV										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	1312	1712.4	22.35	22.50	1.035	-0.19	0.786	0.814	-
		1413	1732.6	22.23	22.50	1.064	-0.18	0.652	0.694	-
		1513	1752.6	22.02	22.50	1.117	-0.15	0.589	0.658	-
	Rear	1312	1712.4	22.35	22.50	1.035	-0.21	0.963	0.997	2
		1413	1732.6	22.23	22.50	1.064	-0.10	0.865	0.920	-
		1513	1752.6	22.02	22.50	1.117	-0.08	0.756	0.844	-
	Left	1312	1712.4	22.35	22.50	1.035	-0.15	0.220	0.228	-
		1413	1732.6	22.23	22.50	1.064	-	-	-	-
		1513	1752.6	22.02	22.50	1.117	-	-	-	-
	Right	1312	1712.4	22.35	22.50	1.035	-0.18	0.156	0.161	-
		1413	1732.6	22.23	22.50	1.064	-	-	-	-
		1513	1752.6	22.02	22.50	1.117	-	-	-	-
	Top	1312	1712.4	22.35	22.50	1.035	0.15	0.060	0.062	-
		1413	1732.6	22.23	22.50	1.064	-	-	-	-
		1513	1752.6	22.02	22.50	1.117	-	-	-	-
	Bottom	1312	1712.4	22.35	22.50	1.035	0.05	0.256	0.265	-
		1413	1732.6	22.23	22.50	1.064	-	-	-	-
		1513	1752.6	22.02	22.50	1.117	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	0.01	0.444	0.455	3
		4233	846.6	22.76	23.00	1.057	-	-	-	-
	Rear	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	-0.07	0.377	0.387	-
		4233	846.6	22.76	23.00	1.057	-	-	-	-
	Left	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	0.15	0.045	0.046	-
		4233	846.6	22.76	23.00	1.057	-	-	-	-
	Right	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	-0.01	0.177	0.182	-
		4233	846.6	22.76	23.00	1.057	-	-	-	-
	Top	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	-0.07	0.039	0.040	-
		4233	846.6	22.76	23.00	1.057	-	-	-	-
	Bottom	4132	826.4	22.87	23.00	1.030	-	-	-	-
		4183	836.6	22.89	23.00	1.026	0.01	0.142	0.146	-
		4233	846.6	22.76	23.00	1.057	-	-	-	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	18700	1860	22.93	23.00	1.016	-0.12	0.656	0.667	-
		18900	1880	22.66	23.00	1.081	-	-	-	-
		19100	1900	22.76	23.00	1.057	-	-	-	-
	Rear	18700	1860	22.93	23.00	1.016	-0.06	0.960	0.976	4
		18900	1880	22.66	23.00	1.081	-0.15	0.900	0.973	-
		19100	1900	22.76	23.00	1.057	-0.05	0.869	0.918	-
	Left	18700	1860	22.93	23.00	1.016	-0.07	0.235	0.239	-
		18900	1880	22.66	23.00	1.081	-	-	-	-
		19100	1900	22.76	23.00	1.057	-	-	-	-
	Right	18700	1860	22.93	23.00	1.016	-0.02	0.155	0.158	-
		18900	1880	22.66	23.00	1.081	-	-	-	-
		19100	1900	22.76	23.00	1.057	-	-	-	-
	Top	18700	1860	22.93	23.00	1.016	-0.15	0.076	0.077	-
		18900	1880	22.66	23.00	1.081	-	-	-	-
		19100	1900	22.76	23.00	1.057	-	-	-	-
	Bottom	18700	1860	22.93	23.00	1.016	0.05	0.305	0.310	-
		18900	1880	22.66	23.00	1.081	-	-	-	-
		19100	1900	22.76	23.00	1.057	-	-	-	-
20M QPSK 50RB	Front	18700	1860	21.88	22.00	1.028	-0.02	0.621	0.638	-
		18900	1880	21.49	22.00	1.125	-	-	-	-
		19100	1900	21.42	22.00	1.143	-	-	-	-
	Rear	18700	1860	21.88	22.00	1.028	0.05	0.944	0.970	-
		18900	1880	21.49	22.00	1.125	0.01	0.862	0.969	-
		19100	1900	21.42	22.00	1.143	-0.02	0.774	0.885	-
	Left	18700	1860	21.88	22.00	1.028	0.04	0.216	0.222	-

		18900	1880	21.49	22.00	1.125	-	-	-	-
		19100	1900	21.42	22.00	1.143	-	-	-	-
	Right	18700	1860	21.88	22.00	1.028	0.09	0.126	0.130	-
		18900	1880	21.49	22.00	1.125	-	-	-	-
		19100	1900	21.42	22.00	1.143	-	-	-	-
	Top	18700	1860	21.88	22.00	1.028	0.15	0.056	0.058	-
		18900	1880	21.49	22.00	1.125	-	-	-	-
		19100	1900	21.42	22.00	1.143	-	-	-	-
	Bottom	18700	1860	21.88	22.00	1.028	-0.12	0.295	0.303	-
		18900	1880	21.49	22.00	1.125	-	-	-	-
		19100	1900	21.42	22.00	1.143	-	-	-	-
20M QPSK 100RB	Front	18700	1860	21.55	22.00	1.109	-0.02	0.621	0.689	-
		18900	1880	21.61	22.00	1.094	-	-	-	-
		19100	1900	21.40	22.00	1.148	-	-	-	-
	Rear	18700	1860	21.55	22.00	1.109	-0.05	0.842	0.934	-
		18900	1880	21.61	22.00	1.094	0.08	0.820	0.897	-
		19100	1900	21.40	22.00	1.148	0.10	0.766	0.879	-
	Left	18700	1860	21.55	22.00	1.109	0.12	0.195	0.216	-
		18900	1880	21.61	22.00	1.094	-	-	-	-
		19100	1900	21.40	22.00	1.148	-	-	-	-
	Right	18700	1860	21.55	22.00	1.109	0.15	0.115	0.128	-
		18900	1880	21.61	22.00	1.094	-	-	-	-
		19100	1900	21.40	22.00	1.148	-	-	-	-
	Top	18700	1860	21.55	22.00	1.109	-0.13	0.026	0.029	-
		18900	1880	21.61	22.00	1.094	-	-	-	-
		19100	1900	21.40	22.00	1.148	-	-	-	-
	Bottom	18700	1860	21.55	22.00	1.109	0.12	0.265	0.294	-
		18900	1880	21.61	22.00	1.094	-	-	-	-

		19100	1900	21.40	22.00	1.148	-	-	-	-
--	--	-------	------	-------	-------	-------	---	---	---	---

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20050	1720	22.39	22.50	1.026	-	-	-	-
		20175	1732.5	22.25	22.50	1.059	-	-	-	-
		20300	1745	22.48	22.50	1.005	-0.05	0.689	0.692	-
	Rear	20050	1720	22.39	22.50	1.026	-0.08	0.689	0.707	-
		20175	1732.5	22.25	22.50	1.059	-0.10	0.756	0.801	-
		20300	1745	22.48	22.50	1.005	-0.12	0.852	0.856	5
	Left	20050	1720	22.39	22.50	1.026	-	-	-	-
		20175	1732.5	22.25	22.50	1.059	-	-	-	-
		20300	1745	22.48	22.50	1.005	-0.08	0.205	0.206	-
	Right	20050	1720	22.39	22.50	1.026	-	-	-	-
		20175	1732.5	22.25	22.50	1.059	-	-	-	-
		20300	1745	22.48	22.50	1.005	-0.10	0.145	0.146	-
	Top	20050	1720	22.39	22.50	1.026	-	-	-	-
		20175	1732.5	22.25	22.50	1.059	-	-	-	-
		20300	1745	22.48	22.50	1.005	0.09	0.045	0.045	-
	Bottom	20050	1720	22.39	22.50	1.026	-	-	-	-
		20175	1732.5	22.25	22.50	1.059	-	-	-	-
		20300	1745	22.48	22.50	1.005	0.12	0.245	0.246	-
20M QPSK 50RB	Front	20050	1720	21.35	21.50	1.035	-	-	-	-
		20175	1732.5	21.29	21.50	1.050	-	-	-	-
		20300	1745	21.37	21.50	1.030	0.06	0.675	0.696	-
	Rear	20050	1720	21.35	21.50	1.035	0.10	0.625	0.647	-
		20175	1732.5	21.29	21.50	1.050	0.05	0.749	0.786	-
		20300	1745	21.37	21.50	1.030	0.04	0.845	0.871	-
	Left	20050	1720	21.35	21.50	1.035	-	-	-	-

		20175	1732.5	21.29	21.50	1.050	-	-	-	-
		20300	1745	21.37	21.50	1.030	0.08	0.195	0.201	-
		20050	1720	21.35	21.50	1.035	-	-	-	-
	Right	20175	1732.5	21.29	21.50	1.050	-	-	-	-
		20300	1745	21.37	21.50	1.030	0.02	0.140	0.144	-
		20050	1720	21.35	21.50	1.035	-	-	-	-
	Top	20175	1732.5	21.29	21.50	1.050	-	-	-	-
		20300	1745	21.37	21.50	1.030	0.15	0.040	0.041	-
		20050	1720	21.35	21.50	1.035	-	-	-	-
	Bottom	20175	1732.5	21.29	21.50	1.050	-	-	-	-
		20300	1745	21.37	21.50	1.030	0.19	0.242	0.249	-
		20050	1720	21.30	21.50	1.047	-	-	-	-
20M QPSK 100RB	Front	20175	1732.5	21.28	21.50	1.052	-	-	-	-
		20300	1745	21.30	21.50	1.047	-0.05	0.655	0.686	-
		20050	1720	21.30	21.50	1.047	0.06	0.642	0.672	-
	Rear	20175	1732.5	21.28	21.50	1.052	-0.12	0.715	0.752	-
		20300	1745	21.30	21.50	1.047	0.10	0.825	0.864	-
		20050	1720	21.30	21.50	1.047	-	-	-	-
	Left	20175	1732.5	21.28	21.50	1.052	-	-	-	-
		20300	1745	21.30	21.50	1.047	0.13	0.176	0.184	-
		20050	1720	21.30	21.50	1.047	-	-	-	-
	Right	20175	1732.5	21.28	21.50	1.052	-	-	-	-
		20300	1745	21.30	21.50	1.047	0.04	0.116	0.121	-
		20050	1720	21.30	21.50	1.047	-	-	-	-
	Top	20175	1732.5	21.28	21.50	1.052	-	-	-	-
		20300	1745	21.30	21.50	1.047	0.15	0.020	0.021	-
		20050	1720	21.30	21.50	1.047	-	-	-	-
	Bottom	20175	1732.5	21.28	21.50	1.052	-	-	-	-
		20050	1720	21.30	21.50	1.047	-	-	-	-

		20300	1745	21.30	21.50	1.047	0.08	0.215	0.225	-
--	--	-------	------	-------	-------	-------	------	-------	-------	---

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829	23.35	23.50	1.035	-0.08	0.306	0.317	6
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
	Rear	20450	829	23.35	23.50	1.035	0.05	0.298	0.308	-
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
	Left	20450	829	23.35	23.50	1.035	0.10	0.038	0.039	-
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
	Right	20450	829	23.35	23.50	1.035	-0.12	0.165	0.171	-
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
	Top	20450	829	23.35	23.50	1.035	0.08	0.035	0.036	-
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
	Bottom	20450	829	23.35	23.50	1.035	-0.04	0.138	0.143	-
		20525	836.5	23.29	23.50	1.050	-	-	-	-
		20600	844	23.32	23.50	1.042	-	-	-	-
10M QPSK 25RB	Front	20450	829	22.40	22.50	1.023	-0.05	0.299	0.306	-
		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-
	Rear	20450	829	22.40	22.50	1.023	-0.12	0.278	0.284	-
		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-
	Left	20450	829	22.40	22.50	1.023	-0.03	0.029	0.030	-

		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-
	Right	20450	829	22.40	22.50	1.023	-0.06	0.157	0.161	-
		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-
	Top	20450	829	22.40	22.50	1.023	0.12	0.030	0.031	-
		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-
	Bottom	20450	829	22.40	22.50	1.023	0.06	0.128	0.131	-
		20525	836.5	22.21	22.50	1.069	-	-	-	-
		20600	844	22.17	22.50	1.079	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	-0.12	0.286	0.293	-
	Rear	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	-0.16	0.450	0.460	7
	Left	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	-0.05	0.189	0.193	-
	Right	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	0.06	0.094	0.096	-
	Top	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	0.10	0.021	0.021	-
	Bottom	20850	2510	22.89	23.50	1.151	-	-	-	-
		21100	2535	23.18	23.50	1.076	-	-	-	-
		21350	2560	23.40	23.50	1.023	0.15	0.156	0.160	-
20M QPSK 50RB	Front	20850	2510	21.73	22.50	1.194	-	-	-	-
		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	0.08	0.276	0.288	-
	Rear	20850	2510	21.73	22.50	1.194	-	-	-	-
		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	0.02	0.425	0.443	-
	Left	20850	2510	21.73	22.50	1.194	-	-	-	-

		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	0.09	0.184	0.192	-
	Right	20850	2510	21.73	22.50	1.194	-	-	-	-
		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	-0.04	0.085	0.089	-
	Top	20850	2510	21.73	22.50	1.194	-	-	-	-
		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	0.13	0.016	0.017	-
	Bottom	20850	2510	21.73	22.50	1.194	-	-	-	-
		21100	2535	21.91	22.50	1.146	-	-	-	-
		21350	2560	22.32	22.50	1.042	-0.16	0.145	0.151	-

LTE Band 12										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	23060	704	23.19	23.50	1.074	-0.11	0.539	0.579	8
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Rear	23060	704	23.19	23.50	1.074	-0.08	0.515	0.553	-
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Left	23060	704	23.19	23.50	1.074	-0.04	0.098	0.105	-
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Right	23060	704	23.19	23.50	1.074	-0.09	0.189	0.203	-
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Top	23060	704	23.19	23.50	1.074	-0.02	0.056	0.060	-
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
	Bottom	23060	704	23.19	23.50	1.074	-0.10	0.167	0.179	-
		23095	707.5	23.14	23.50	1.086	-	-	-	-
		23130	711	23.15	23.50	1.084	-	-	-	-
10M QPSK 25RB	Front	23060	704	22.25	22.50	1.059	0.16	0.525	0.556	-
		23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
	Rear	23060	704	22.25	22.50	1.059	0.15	0.506	0.536	-
		23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
	Left	23060	704	22.25	22.50	1.059	0.18	0.086	0.091	-

		23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
		23060	704	22.25	22.50	1.059	-0.12	0.175	0.185	-
	Right	23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
		23060	704	22.25	22.50	1.059	-0.05	0.059	0.062	-
	Top	23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
		23060	704	22.25	22.50	1.059	-0.08	0.156	0.165	-
	Bottom	23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
		23060	704	22.25	22.50	1.059	-0.08	0.156	0.165	-
		23095	707.5	22.05	22.50	1.109	-	-	-	-
		23130	711	22.08	22.50	1.102	-	-	-	-
		23060	704	22.25	22.50	1.059	-0.08	0.156	0.165	-

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	-0.17	0.510	0.525	9
	Rear	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	0.08	0.502	0.517	-
	Left	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	0.06	0.085	0.088	-
	Right	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	-0.05	0.156	0.161	-
	Top	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	0.09	0.048	0.049	-
	Bottom	23780	709	23.33	23.50	1.040	-	-	-	-
		23790	710	23.32	23.50	1.042	-	-	-	-
		23800	711	23.37	23.50	1.030	0.12	0.146	0.150	-
10M QPSK 25RB	Front	23780	709	22.18	22.50	1.076	-	-	-	-
		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	-0.13	0.501	0.522	-
	Rear	23780	709	22.18	22.50	1.076	-	-	-	-
		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	0.08	0.495	0.516	-
	Left	23780	709	22.18	22.50	1.076	-	-	-	-

		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	0.05	0.075	0.078	-
	Right	23780	709	22.18	22.50	1.076	-	-	-	-
		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	0.09	0.152	0.158	-
	Top	23780	709	22.18	22.50	1.076	-	-	-	-
		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	0.15	0.042	0.044	-
	Bottom	23780	709	22.18	22.50	1.076	-	-	-	-
		23790	710	22.24	22.50	1.062	-	-	-	-
		23800	711	22.32	22.50	1.042	-0.06	0.138	0.144	-

LTE Band 38											
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	37850	2580	23.34	23.50	1.038	1.006	0.14	0.275	0.287	-
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
	Rear	37850	2580	23.34	23.50	1.038	1.006	0.16	0.457	0.477	10
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
	Left	37850	2580	23.34	23.50	1.038	1.006	-0.09	0.180	0.188	-
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
	Right	37850	2580	23.34	23.50	1.038	1.006	0.06	0.090	0.094	-
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
	Top	37850	2580	23.34	23.50	1.038	1.006	0.12	0.025	0.026	-
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
	Bottom	37850	2580	23.34	23.50	1.038	1.006	0.15	0.152	0.159	-
		38000	2595	23.25	23.50	1.059	1.006	-	-	-	-
		38150	2610	23.15	23.50	1.084	1.006	-	-	-	-
20M QPSK 50RB	Front	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-
		38000	2595	22.06	22.50	1.107	1.006	-0.10	0.270	0.301	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-
	Rear	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-
		38000	2595	22.06	22.50	1.107	1.006	0.19	0.448	0.499	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-
	Left	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-

		38000	2595	22.06	22.50	1.107	1.006	-0.14	0.175	0.195	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-
	Right	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-
		38000	2595	22.06	22.50	1.107	1.006	0.12	0.087	0.097	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-
	Top	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-
		38000	2595	22.06	22.50	1.107	1.006	0.10	0.022	0.024	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-
	Bottom	37850	2580	22.03	22.50	1.114	1.006	-	-	-	-
		38000	2595	22.06	22.50	1.107	1.006	0.08	0.150	0.167	-
		38150	2610	21.88	22.50	1.153	1.006	-	-	-	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

LTE Band 41											
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz						(W/kg)	(W/kg)	
20M QPSK 1RB	Front	40340	2562	22.72	23.00	1.067	1.006	0.07	0.189	0.203	-
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
	Rear	40340	2562	22.72	23.00	1.067	1.006	-0.12	0.360	0.386	11
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
	Left	40340	2562	22.72	23.00	1.067	1.006	-0.11	0.125	0.134	-
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
	Right	40340	2562	22.72	23.00	1.067	1.006	-0.16	0.050	0.054	-
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
	Top	40340	2562	22.72	23.00	1.067	1.006	0.08	0.012	0.013	-
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
	Bottom	40340	2562	22.72	23.00	1.067	1.006	-0.13	0.112	0.120	-
		40740	2605	22.61	23.00	1.094	1.006	-	-	-	-
		41140	2645	22.43	23.00	1.140	1.006	-	-	-	-
20M QPSK 50RB	Front	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-
		40740	2605	21.41	21.50	1.021	1.006	0.04	0.185	0.190	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-
	Rear	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-
		40740	2605	21.41	21.50	1.021	1.006	0.10	0.355	0.365	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-
	Left	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-

		40740	2605	21.41	21.50	1.021	1.006	-0.17	0.120	0.123	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-
	Right	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-
		40740	2605	21.41	21.50	1.021	1.006	-0.12	0.045	0.046	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-
	Top	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-
		40740	2605	21.41	21.50	1.021	1.006	-0.16	0.010	0.010	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-
	Bottom	40340	2562	21.23	21.50	1.064	1.006	-	-	-	-
		40740	2605	21.41	21.50	1.021	1.006	0.09	0.105	0.108	-
		41140	2645	21.14	21.50	1.086	1.006	-	-	-	-

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

WIFI 2.4G											
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)
		CH	MHz							(W/kg)	(W/kg)
802.11b 1Mbps	Front	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.14	0.176	0.185
	Rear	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.04	0.226	0.237
	Left	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.14	0.155	0.163
	Right	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.08	0.089	0.093
	Top	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.16	0.032	0.034
	Bottom	1	2412	8.34	8.50	1.038	99.50%	1.01	-	-	-
		6	2437	8.67	9.00	1.079	99.50%	1.01	-	-	-
		11	2462	13.81	14.00	1.045	99.50%	1.01	-0.12	0.135	0.142

WIFI 5G U-NII-1												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11ac (VHT20)	Front	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	-0.12	0.395	0.418	-
	Rear	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	-0.15	0.500	0.529	13
	Left	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	0.05	0.258	0.273	-
	Right	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	-0.10	0.132	0.140	-
	Top	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	-0.11	0.075	0.079	-
	Bottom	36	5180	13.62	14.00	1.091	97.18%	1.03	-	-	-	-
		44	5220	14.48	14.50	1.005	97.18%	1.03	-	-	-	-
		48	5240	15.38	15.50	1.028	97.09%	1.03	-0.15	0.235	0.249	-

WIFI 5G U-NII-3												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11ac (VHT20)	Front	149	5745	14.37	14.50	1.030	97.18%	1.03	-0.07	0.335	0.355	-
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-
	Rear	149	5745	14.37	14.50	1.030	97.18%	1.03	-0.14	0.489	0.518	14
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-
	Left	149	5745	14.37	14.50	1.030	97.18%	1.03	0.10	0.268	0.284	-
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-
	Right	149	5745	14.37	14.50	1.030	97.18%	1.03	-0.13	0.175	0.186	-
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-
	Top	149	5745	14.37	14.50	1.030	97.18%	1.03	-0.16	0.075	0.080	-
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-
	Bottom	149	5745	14.37	14.50	1.030	97.18%	1.03	-0.09	0.246	0.261	-
		157	5785	14.14	14.50	1.086	97.18%	1.03	-	-	-	-
		165	5825	14.16	14.50	1.081	97.18%	1.03	-	-	-	-

SAR Test Data Plots to the Appendix A.

15. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Frequency		Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
		CH	MHz		Measured SAR(W/kg)	Largest to Smallest SAR Ratio	Measured SAR(W/kg)	Largest to Smallest SAR Ratio
WCDMA Band II	Rear	9262	1852.4	1.000	0.995	1.005	N/A	N/A
WCDMA Band IV	Rear	1312	1712.4	0.963	0.955	1.008	N/A	N/A
LTE Band 2	Rear	18700	1860	0.960	0.925	1.037	N/A	N/A
LTE Band 4	Rear	20300	1745	0.852	0.845	1.008	N/A	N/A

16. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Hotspot	Note
1	WCDMA (data) + Bluetooth (data)	NA	
2	WCDMA (data) + WLAN (data)	Yes	
3	LTE + Bluetooth (data)	NA	
4	LTE + WLAN (data)	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Body
	Test separation	5mm
-1.00dBm	Estimated SAR (W/kg)	0.033

PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN DTS	(W/kg)
WCDMA	Band II	Front	0.715	0.185	0.900
		Rear	1.050	0.237	1.287
		Left	0.262	0.163	0.425
		Right	0.184	0.093	0.277
		Top	0.089	0.034	0.123
		Bottom	0.331	0.142	0.473
	Band IV	Front	0.814	0.185	0.999
		Rear	0.997	0.237	1.234
		Left	0.228	0.163	0.391
		Right	0.161	0.093	0.254
		Top	0.062	0.034	0.096
		Bottom	0.265	0.142	0.407
	Band V	Front	0.455	0.185	0.640
		Rear	0.387	0.237	0.624
		Left	0.046	0.163	0.209
		Right	0.182	0.093	0.275
		Top	0.040	0.034	0.074
		Bottom	0.146	0.142	0.288
LTE	B2 1RB	Front	0.667	0.185	0.852
		Rear	0.976	0.237	1.213
		Left	0.239	0.163	0.402
		Right	0.158	0.093	0.251
		Top	0.077	0.034	0.111
		Bottom	0.310	0.142	0.452
	B2 50RB	Front	0.638	0.185	0.823

		Rear	0.970	0.237	1.207
		Left	0.222	0.163	0.385
		Right	0.130	0.093	0.223
		Top	0.058	0.034	0.092
		Bottom	0.303	0.142	0.445
	B2 100RB	Front	0.621	0.185	0.806
		Rear	0.934	0.237	1.171
		Left	0.195	0.163	0.358
		Right	0.115	0.093	0.208
		Top	0.026	0.034	0.060
		Bottom	0.265	0.142	0.407
	B4 1RB	Front	0.692	0.185	0.877
		Rear	0.856	0.237	1.093
		Left	0.206	0.163	0.369
		Right	0.146	0.093	0.239
		Top	0.045	0.034	0.079
		Bottom	0.246	0.142	0.388
	B4 50RB	Front	0.696	0.185	0.881
		Rear	0.871	0.237	1.108
		Left	0.201	0.163	0.364
		Right	0.144	0.093	0.237
		Top	0.041	0.034	0.075
		Bottom	0.249	0.142	0.391
	B4 100RB	Front	0.655	0.185	0.840
		Rear	0.825	0.237	1.062
		Left	0.176	0.163	0.339
		Right	0.116	0.093	0.209
		Top	0.020	0.034	0.054

		Bottom	0.215	0.142	0.357
	B5 1RB	Front	0.317	0.185	0.502
		Rear	0.308	0.237	0.545
		Left	0.039	0.163	0.202
		Right	0.171	0.093	0.264
		Top	0.036	0.034	0.070
		Bottom	0.143	0.142	0.285
	B5 25RB	Front	0.306	0.185	0.491
		Rear	0.284	0.237	0.521
		Left	0.030	0.163	0.193
		Right	0.161	0.093	0.254
		Top	0.031	0.034	0.065
		Bottom	0.131	0.142	0.273
	B7 1RB	Front	0.293	0.185	0.478
		Rear	0.460	0.237	0.697
		Left	0.193	0.163	0.356
		Right	0.096	0.093	0.189
		Top	0.021	0.034	0.055
		Bottom	0.160	0.142	0.302
	B7 50RB	Front	0.288	0.185	0.473
		Rear	0.443	0.237	0.680
		Left	0.192	0.163	0.355
		Right	0.089	0.093	0.182
		Top	0.017	0.034	0.051
		Bottom	0.151	0.142	0.293
	B12 1RB	Front	0.579	0.185	0.764
		Rear	0.553	0.237	0.790
		Left	0.105	0.163	0.268

		Right	0.203	0.093	0.296
		Top	0.060	0.034	0.094
		Bottom	0.179	0.142	0.321
	B12 25RB	Front	0.556	0.185	0.741
		Rear	0.536	0.237	0.773
		Left	0.091	0.163	0.254
		Right	0.185	0.093	0.278
		Top	0.062	0.034	0.096
		Bottom	0.165	0.142	0.307
	B17 1RB	Front	0.525	0.185	0.710
		Rear	0.517	0.237	0.754
		Left	0.088	0.163	0.251
		Right	0.161	0.093	0.254
		Top	0.049	0.034	0.083
		Bottom	0.150	0.142	0.292
	B17 25RB	Front	0.522	0.185	0.707
		Rear	0.516	0.237	0.753
		Left	0.078	0.163	0.241
		Right	0.158	0.093	0.251
		Top	0.044	0.034	0.078
		Bottom	0.144	0.142	0.286
	B38 1RB	Front	0.287	0.185	0.472
		Rear	0.477	0.237	0.714
		Left	0.188	0.163	0.351
		Right	0.094	0.093	0.187
		Top	0.026	0.034	0.060
		Bottom	0.159	0.142	0.301
	B38 50RB	Front	0.301	0.185	0.486

		Rear	0.499	0.237	0.736
		Left	0.195	0.163	0.358
		Right	0.097	0.093	0.190
		Top	0.024	0.034	0.058
		Bottom	0.167	0.142	0.309
	B41 1RB	Front	0.203	0.185	0.388
		Rear	0.386	0.237	0.623
		Left	0.134	0.163	0.297
		Right	0.054	0.093	0.147
		Top	0.013	0.034	0.047
		Bottom	0.120	0.142	0.262
	B41 50RB	Front	0.190	0.185	0.375
		Rear	0.365	0.237	0.602
		Left	0.123	0.163	0.286
		Right	0.046	0.093	0.139
		Top	0.010	0.034	0.044
		Bottom	0.108	0.142	0.250

PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN U-NII	(W/kg)
WCDMA	Band II	Front	0.715	0.418	1.133
		Rear	1.050	0.529	1.579
		Left	0.262	0.273	0.535
		Right	0.184	0.140	0.324
		Top	0.089	0.079	0.168
		Bottom	0.331	0.249	0.580
	Band IV	Front	0.814	0.418	1.232
		Rear	0.997	0.529	1.526
		Left	0.228	0.273	0.501
		Right	0.161	0.140	0.301
		Top	0.062	0.079	0.141
		Bottom	0.265	0.249	0.514
	Band V	Front	0.455	0.418	0.873
		Rear	0.387	0.529	0.916
		Left	0.046	0.273	0.319
		Right	0.182	0.140	0.322
		Top	0.040	0.079	0.119
		Bottom	0.146	0.249	0.395
LTE	B2 1RB	Front	0.667	0.418	1.085
		Rear	0.976	0.529	1.505
		Left	0.239	0.273	0.512
		Right	0.158	0.140	0.298
		Top	0.077	0.079	0.156
		Bottom	0.310	0.249	0.559
	B2 50RB	Front	0.638	0.418	1.056

		Rear	0.970	0.529	1.499
		Left	0.222	0.273	0.495
		Right	0.130	0.140	0.270
		Top	0.058	0.079	0.137
		Bottom	0.303	0.249	0.552
	B2 100RB	Front	0.621	0.418	1.039
		Rear	0.934	0.529	1.463
		Left	0.195	0.273	0.468
		Right	0.115	0.140	0.255
		Top	0.026	0.079	0.105
		Bottom	0.265	0.249	0.514
	B4 1RB	Front	0.692	0.418	1.110
		Rear	0.856	0.529	1.385
		Left	0.206	0.273	0.479
		Right	0.146	0.140	0.286
		Top	0.045	0.079	0.124
		Bottom	0.246	0.249	0.495
	B4 50RB	Front	0.696	0.418	1.114
		Rear	0.871	0.529	1.400
		Left	0.201	0.273	0.474
		Right	0.144	0.140	0.284
		Top	0.041	0.079	0.120
		Bottom	0.249	0.249	0.498
	B4 100RB	Front	0.655	0.418	1.073
		Rear	0.825	0.529	1.354
		Left	0.176	0.273	0.449
		Right	0.116	0.140	0.256
		Top	0.020	0.079	0.099

		Bottom	0.215	0.249	0.464
	B5 1RB	Front	0.317	0.418	0.735
		Rear	0.308	0.529	0.837
		Left	0.039	0.273	0.312
		Right	0.171	0.140	0.311
		Top	0.036	0.079	0.115
		Bottom	0.143	0.249	0.392
	B5 25RB	Front	0.306	0.418	0.724
		Rear	0.284	0.529	0.813
		Left	0.030	0.273	0.303
		Right	0.161	0.140	0.301
		Top	0.031	0.079	0.110
		Bottom	0.131	0.249	0.380
	B7 1RB	Front	0.293	0.418	0.711
		Rear	0.460	0.529	0.989
		Left	0.193	0.273	0.466
		Right	0.096	0.140	0.236
		Top	0.021	0.079	0.100
		Bottom	0.160	0.249	0.409
	B7 50RB	Front	0.288	0.418	0.706
		Rear	0.443	0.529	0.972
		Left	0.192	0.273	0.465
		Right	0.089	0.140	0.229
		Top	0.017	0.079	0.096
		Bottom	0.151	0.249	0.400
	B12 1RB	Front	0.579	0.418	0.997
		Rear	0.553	0.529	1.082
		Left	0.105	0.273	0.378

		Right	0.203	0.140	0.343
		Top	0.060	0.079	0.139
		Bottom	0.179	0.249	0.428
	B12 25RB	Front	0.556	0.418	0.974
		Rear	0.536	0.529	1.065
		Left	0.091	0.273	0.364
		Right	0.185	0.140	0.325
		Top	0.062	0.079	0.141
		Bottom	0.165	0.249	0.414
	B17 1RB	Front	0.525	0.418	0.943
		Rear	0.517	0.529	1.046
		Left	0.088	0.273	0.361
		Right	0.161	0.140	0.301
		Top	0.049	0.079	0.128
		Bottom	0.150	0.249	0.399
	B17 25RB	Front	0.522	0.418	0.940
		Rear	0.516	0.529	1.045
		Left	0.078	0.273	0.351
		Right	0.158	0.140	0.298
		Top	0.044	0.079	0.123
		Bottom	0.144	0.249	0.393
	B38 1RB	Front	0.287	0.418	0.705
		Rear	0.477	0.529	1.006
		Left	0.188	0.273	0.461
		Right	0.094	0.140	0.234
		Top	0.026	0.079	0.105
		Bottom	0.159	0.249	0.408
	B38 50RB	Front	0.301	0.418	0.719

		Rear	0.499	0.529	1.028
		Left	0.195	0.273	0.468
		Right	0.097	0.140	0.237
		Top	0.024	0.079	0.103
		Bottom	0.167	0.249	0.416
	B41 1RB	Front	0.203	0.418	0.621
		Rear	0.386	0.529	0.915
		Left	0.134	0.273	0.407
		Right	0.054	0.140	0.194
		Top	0.013	0.079	0.092
		Bottom	0.120	0.249	0.369
	B41 50RB	Front	0.190	0.418	0.608
		Rear	0.365	0.529	0.894
		Left	0.123	0.273	0.396
		Right	0.046	0.140	0.186
		Top	0.010	0.079	0.089
		Bottom	0.108	0.249	0.357

PCE +BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	BT	(W/kg)
WCDMA	Band II	Front	0.715	0.033	0.748
		Rear	1.050	0.033	1.083
		Left	0.262	0.033	0.295
		Right	0.184	0.033	0.217
		Top	0.089	0.033	0.122
		Bottom	0.331	0.033	0.364
	Band IV	Front	0.814	0.033	0.847
		Rear	0.997	0.033	1.030
		Left	0.228	0.033	0.261
		Right	0.161	0.033	0.194
		Top	0.062	0.033	0.095
		Bottom	0.265	0.033	0.298
	Band V	Front	0.455	0.033	0.488
		Rear	0.387	0.033	0.420
		Left	0.046	0.033	0.079
		Right	0.182	0.033	0.215
		Top	0.040	0.033	0.073
		Bottom	0.146	0.033	0.179
LTE	B2 1RB	Front	0.667	0.033	0.700
		Rear	0.976	0.033	1.009
		Left	0.239	0.033	0.272
		Right	0.158	0.033	0.191
		Top	0.077	0.033	0.110
		Bottom	0.310	0.033	0.343
	B2 50RB	Front	0.638	0.033	0.671


		Rear	0.970	0.033	1.003
		Left	0.222	0.033	0.255
		Right	0.130	0.033	0.163
		Top	0.058	0.033	0.091
		Bottom	0.303	0.033	0.336
	B2 100RB	Front	0.621	0.033	0.654
		Rear	0.934	0.033	0.967
		Left	0.195	0.033	0.228
		Right	0.115	0.033	0.148
		Top	0.026	0.033	0.059
		Bottom	0.265	0.033	0.298
	B4 1RB	Front	0.692	0.033	0.725
		Rear	0.856	0.033	0.889
		Left	0.206	0.033	0.239
		Right	0.146	0.033	0.179
		Top	0.045	0.033	0.078
		Bottom	0.246	0.033	0.279
	B4 50RB	Front	0.696	0.033	0.729
		Rear	0.871	0.033	0.904
		Left	0.201	0.033	0.234
		Right	0.144	0.033	0.177
		Top	0.041	0.033	0.074
		Bottom	0.249	0.033	0.282
	B4 100RB	Front	0.655	0.033	0.688
		Rear	0.825	0.033	0.858
		Left	0.176	0.033	0.209
		Right	0.116	0.033	0.149
		Top	0.020	0.033	0.053

		Bottom	0.215	0.033	0.248
	B5 1RB	Front	0.317	0.033	0.350
		Rear	0.308	0.033	0.341
		Left	0.039	0.033	0.072
		Right	0.171	0.033	0.204
		Top	0.036	0.033	0.069
		Bottom	0.143	0.033	0.176
	B5 25RB	Front	0.306	0.033	0.339
		Rear	0.284	0.033	0.317
		Left	0.030	0.033	0.063
		Right	0.161	0.033	0.194
		Top	0.031	0.033	0.064
		Bottom	0.131	0.033	0.164
	B7 1RB	Front	0.293	0.033	0.326
		Rear	0.460	0.033	0.493
		Left	0.193	0.033	0.226
		Right	0.096	0.033	0.129
		Top	0.021	0.033	0.054
		Bottom	0.160	0.033	0.193
	B7 50RB	Front	0.288	0.033	0.321
		Rear	0.443	0.033	0.476
		Left	0.192	0.033	0.225
		Right	0.089	0.033	0.122
		Top	0.017	0.033	0.050
		Bottom	0.151	0.033	0.184
	B12 1RB	Front	0.579	0.033	0.612
		Rear	0.553	0.033	0.586
		Left	0.105	0.033	0.138

		Right	0.203	0.033	0.236
		Top	0.060	0.033	0.093
		Bottom	0.179	0.033	0.212
	B12 25RB	Front	0.556	0.033	0.589
		Rear	0.536	0.033	0.569
		Left	0.091	0.033	0.124
		Right	0.185	0.033	0.218
		Top	0.062	0.033	0.095
		Bottom	0.165	0.033	0.198
	B17 1RB	Front	0.525	0.033	0.558
		Rear	0.517	0.033	0.550
		Left	0.088	0.033	0.121
		Right	0.161	0.033	0.194
		Top	0.049	0.033	0.082
		Bottom	0.150	0.033	0.183
	B17 25RB	Front	0.522	0.033	0.555
		Rear	0.516	0.033	0.549
		Left	0.078	0.033	0.111
		Right	0.158	0.033	0.191
		Top	0.044	0.033	0.077
		Bottom	0.144	0.033	0.177
	B38 1RB	Front	0.287	0.033	0.320
		Rear	0.477	0.033	0.510
		Left	0.188	0.033	0.221
		Right	0.094	0.033	0.127
		Top	0.026	0.033	0.059
		Bottom	0.159	0.033	0.192
	B38 50RB	Front	0.301	0.033	0.334

		Rear	0.499	0.033	0.532
		Left	0.195	0.033	0.228
		Right	0.097	0.033	0.130
		Top	0.024	0.033	0.057
		Bottom	0.167	0.033	0.200
	B41 1RB	Front	0.203	0.033	0.236
		Rear	0.386	0.033	0.419
		Left	0.134	0.033	0.167
		Right	0.054	0.033	0.087
		Top	0.013	0.033	0.046
		Bottom	0.120	0.033	0.153
	B41 50RB	Front	0.190	0.033	0.223
		Rear	0.365	0.033	0.398
		Left	0.123	0.033	0.156
		Right	0.046	0.033	0.079
		Top	0.010	0.033	0.043
		Bottom	0.108	0.033	0.141

17. TestSetup Photos

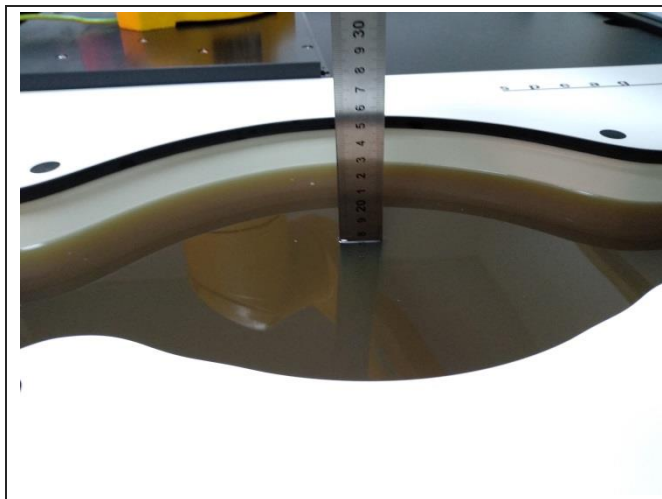

Liquid depth in the Body phantom



Front (5mm)




Rear (5mm)



Left Side (5mm)



Right Side (5mm)

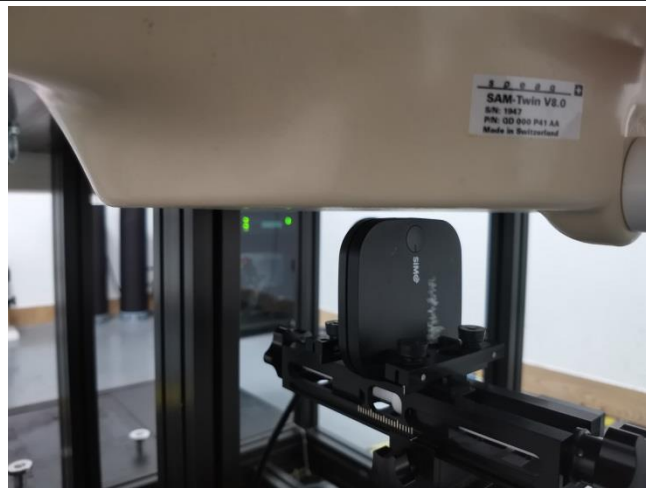

Top Side (5mm)



Bottom Side (5mm)

18. External and Internal Photos of the EUT

Please reference to the report No.: CHTEW21070077

-----End of Report-----