

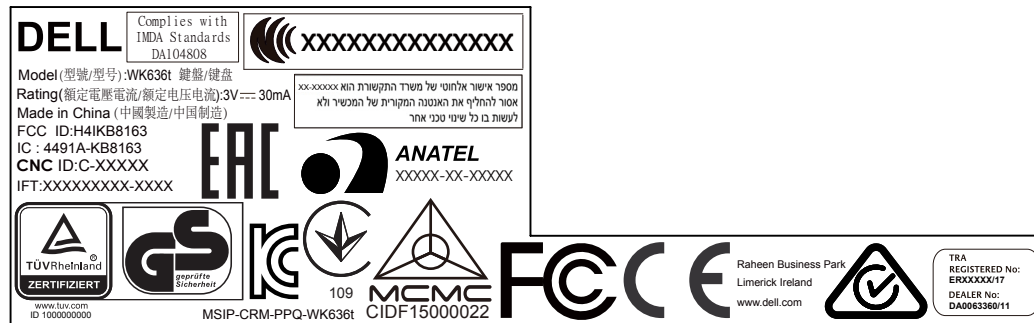


MARK	ISSUE	DATE	VER.	DCN NO.
------	-------	------	------	---------

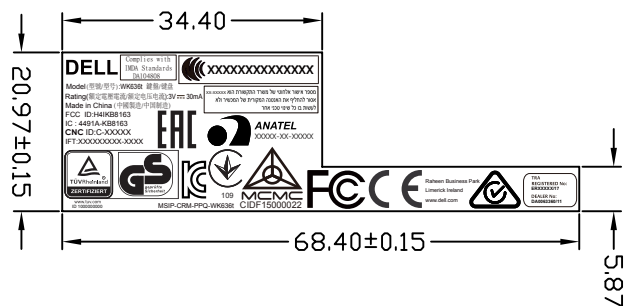

SCALE 2:1

字体正面


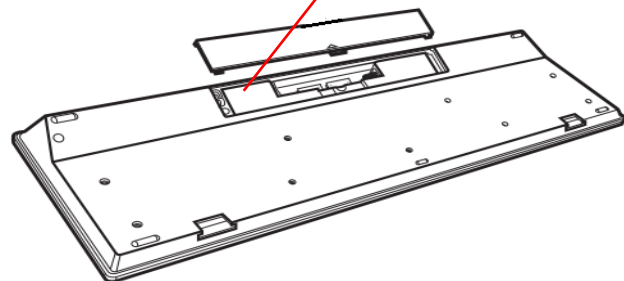


Note:


1. Material is: PP(合成紙)
2. All content in Pantone 425C on matte black background
3. QR code & PPID can be black on white background (打印条码区域白色)
4. Battery Icons should be in white
5. The part is according to the latest version HS-301 of LITEON.
6. Unit: mm
7. Tolerance: +/-0.2mm
8. The adhesive force: 3.5kgf min(90度拉拔測試規格) or 1.2kgf min(180度剝離測試規格)
9. Rolling style: the letter is positive when pick up the label.
10. Array: single file.

PART NO	DESCRIPTION	Q'TY	MAT'L	COLOR	REMARK
SCALE:	TOLERANCE UNSPECIFIED:	SILITEK ELECTRONICS(DONGGUAN)CO.,LTD DONGGUAN LITE-ON COMPUTER CO., LTD.			
1:1	.XXX ±0.05				
UNIT:	.XX ±0.10				
mm	.X ±0.15				
	. ±0.25				
	ANGLE ±0.5°				
DRAWN:				TITLE:	
DESIGNER:		PAGE:		FCC Label-Left	
CHECKED:		1 of 1		SK 8163	
APPROVED:		DRAWING NO.:		836-	

MARK	ISSUE	DATE	VER.	DCN NO.
------	-------	------	------	---------

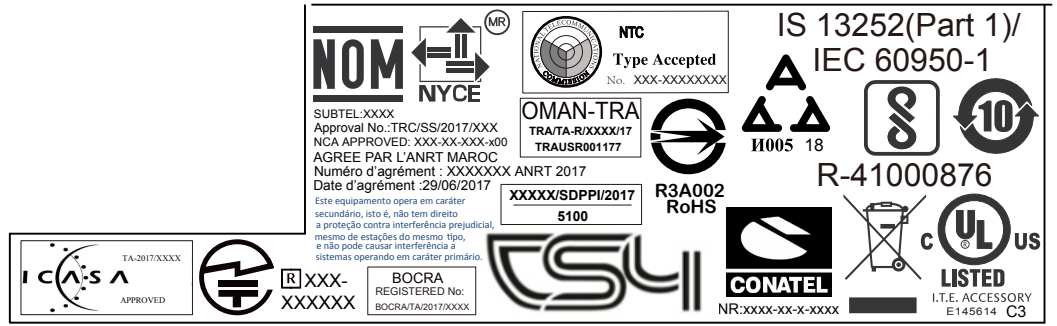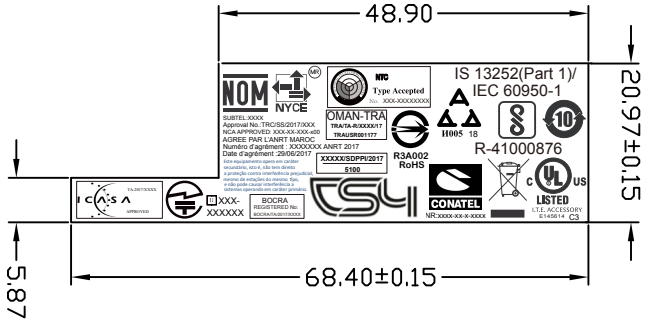

SCALE 2:1
字体正面

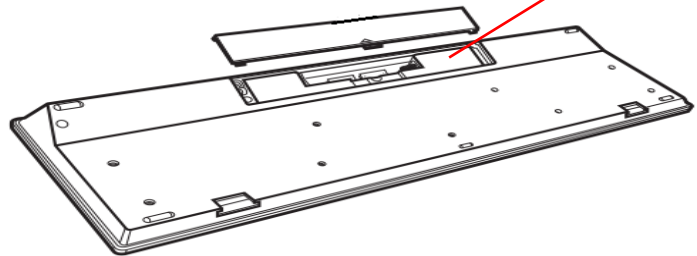

- Note:
1. Material is: PP(合成紙)
 2. All content in Pantone 425C on matte black background
 3. QR code & PPID can be black on white background (打印条码区域白色)
 4. Battery Icons should be in white
 5. The part is according to the latest version HS-301 of LITEON.
 6. Unit: mm
 7. Tolerance: +/-0.2mm
 8. The adhesive force: 3.5kgf min(90度拉拔測試規格) or 1.2kgf min(180度剝離測試規格)
 9. Rolling style: the letter is positive when pick up the label.
 10. Array: single file.

PART NO	DESCRIPTION	Q'TY	MAT'L	COLOR	REMARK
SCALE: 1:1	TOLERANCE UNSPECIFIED: .XXX ±0.05 .XX ±0.10 .X ±0.15 . ±0.25 ANGLE ±0.5°	SILITEK ELECTRONICS(DONGGUAN)CO.,LTD DONGGUAN LITE-ON COMPUTER CO., LTD.			
UNIT: mm		DRAWN:		TITLE: FCC Label-Right SK 8163	
DESIGNER:		PAGE: 1 of 1			
CHECKED:		DRAWING NO.: 836-			
APPROVED:					