

F C C -

TEST REPORT

REPORT NO.: 47741

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 2 of 17

FCC listed testlab acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of
ANSI C63.4 - 2003

Product : Radio Controller For Model Toys

Product Class : Low Power Communication Device -
Transmitter

Brand Name : --

Model : H6C-TX2038

Applicant : WAVECON ELECTRONICS LIMITED

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 3 of 17

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Test Location and Summary of Test Results
6. Test Equipment List
7. Radiated Emission Test Setup (9kHz – 30MHz)
8. Radiated Emission Test Setup (> 30 MHz)
9. Conducted Emission Test Setup
10. Test Procedure
11. Test Results
12. Measurement Data
- 13-14. Time Domain Plot
15. Measurement Data
16. Measurement of Emissions within Band Edges (Band Edges Plot)
17. Photo of sample

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 4 of 17

LABORATORY - REPORT

APPLICANT: WAVECON ELECTRONICS LIMITED
ADDRESS: Room 2208, Metropole Square
2 On Yiu Street, Siu Lek Yuen, Shatin, N.T.
Hong Kong

DATE OF SAMPLE RECEIVED: 2007-04-10

DATE OF TESTING: 2007-04-16 to 2007-04-21 and 2007-05-02 to 2007-05-03

DESCRIPTION OF SAMPLE:


Product: Radio Controller For Model Toys
Product class: Low Power Communication Device - Transmitter
Model number: H6C-TX2038
Rating: DC 9V ('6F22' Size Battery x 1)

CONDITION OF TEST SAMPLE: The received sample was under good condition. Modification was performed on the sample to improve the sample to pass the radiated emission test:
- The inductor L1 (2.2 μ H) was changed to a choke coil of 15 μ H (part number BA1203033534 or equivalent)

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached sheets

CONCLUSIONS: From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

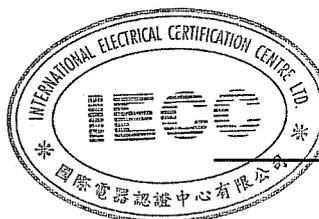

Stephen Wong

Authorized Signature

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 5 of 17

Test Location

International Electrical Certification Centre Ltd.
Unit 602-605, 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong
Tel : +852 23052570
Fax : +852 27564480
Email : info@iecc.com.hk

Summary of Test Results

Radiated Emission:

Test result: O.K.
Test data: See attached data sheet

Conducted Emission:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 6 of 17

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
Test Receiver	Rohde & Schwarz	ESCS 30	100388	12/4/2007	11/4/2008
Antenna	Schaffner	CBL6111C	2791	25/05/2005	24/05/2008
Antenna Mast System	Schwarzbeck	AM9104	--	--	--
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	18/11/2006	17/11/2009
Turntable with Controller	Drehtisch	DT312	--	--	--
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	16/11/2005	15/11/2007


FCC – Test Report

No. 47741

Date: 2007-05-08

Page 7 of 17

Radiated Emission Test Setup (9kHz – 30MHz)

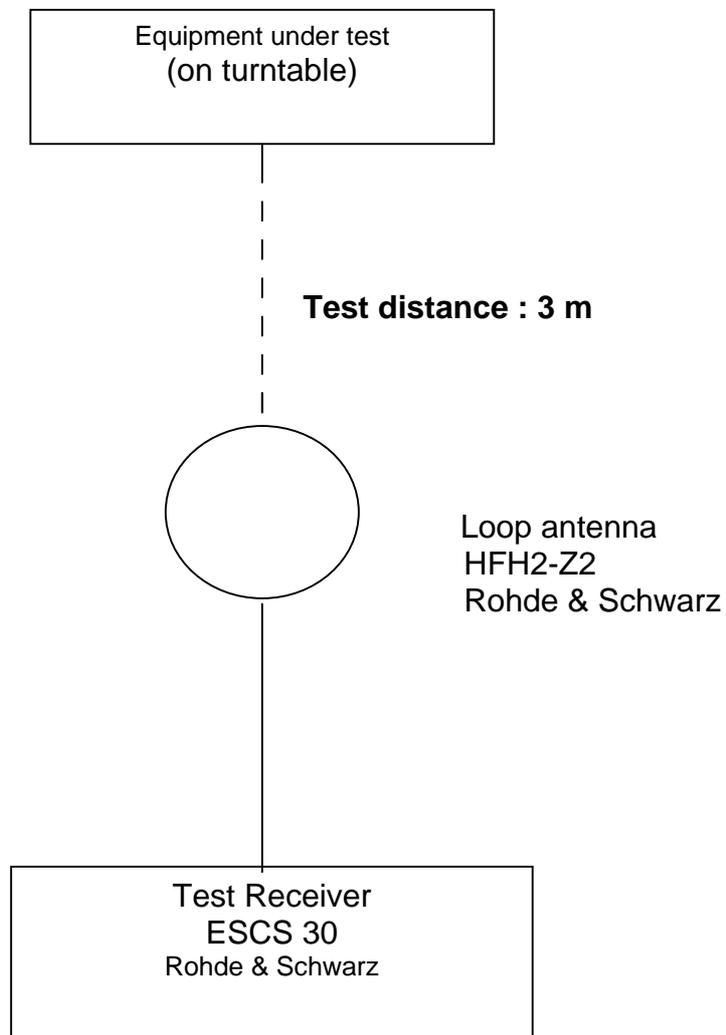


FCC – Test Report

No. 47741


Date: 2007-05-08

Page 8 of 17

Radiated Emission Test Setup (3 m distance) (> 30MHz)

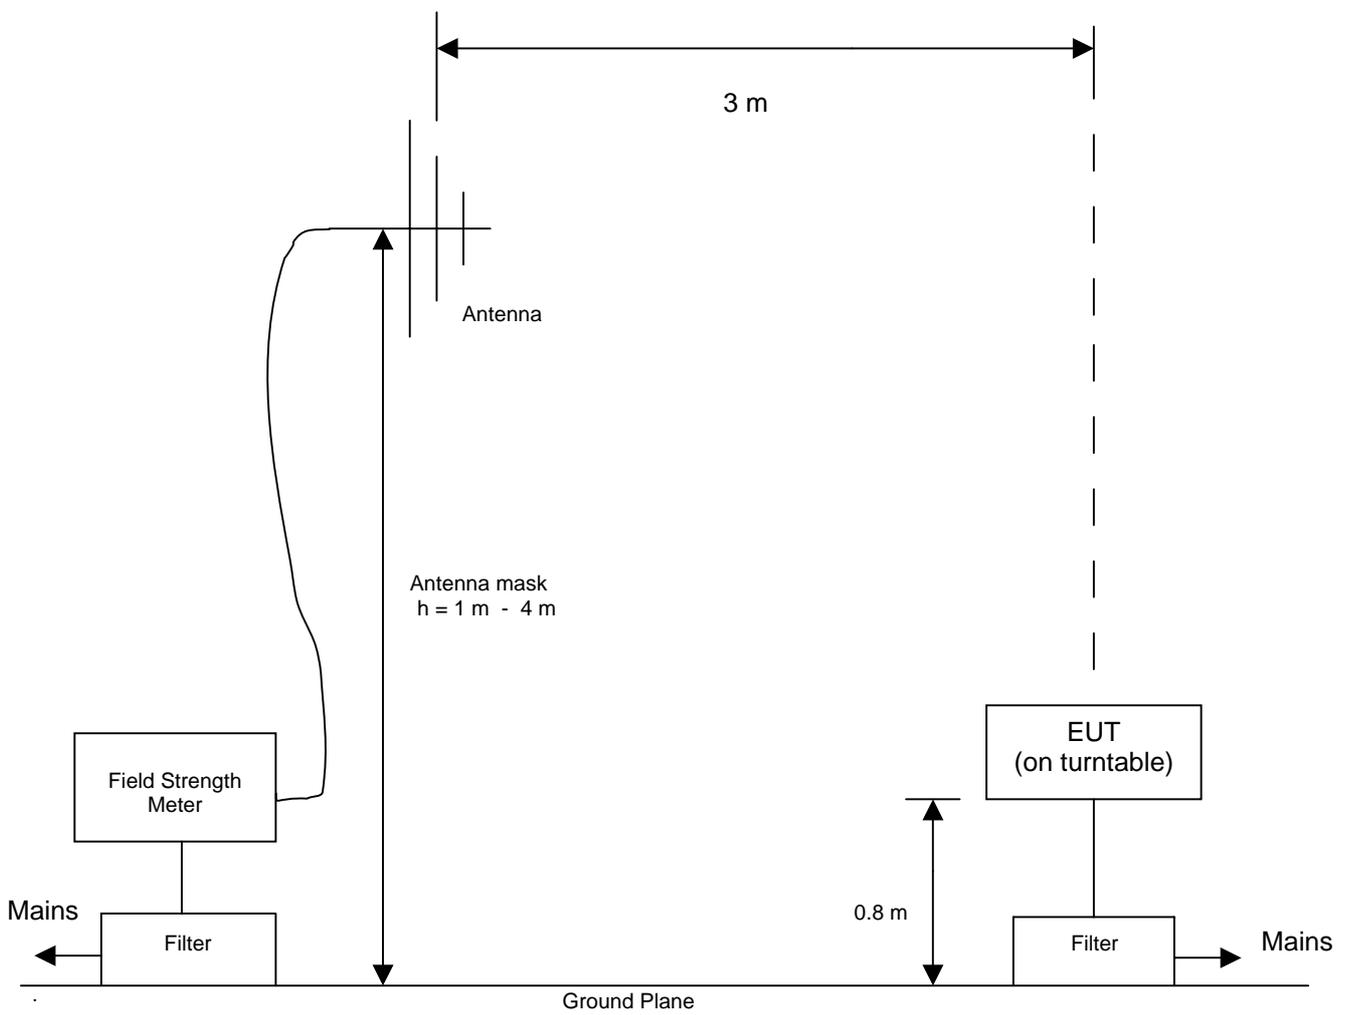

Conducted Emission Test Setup

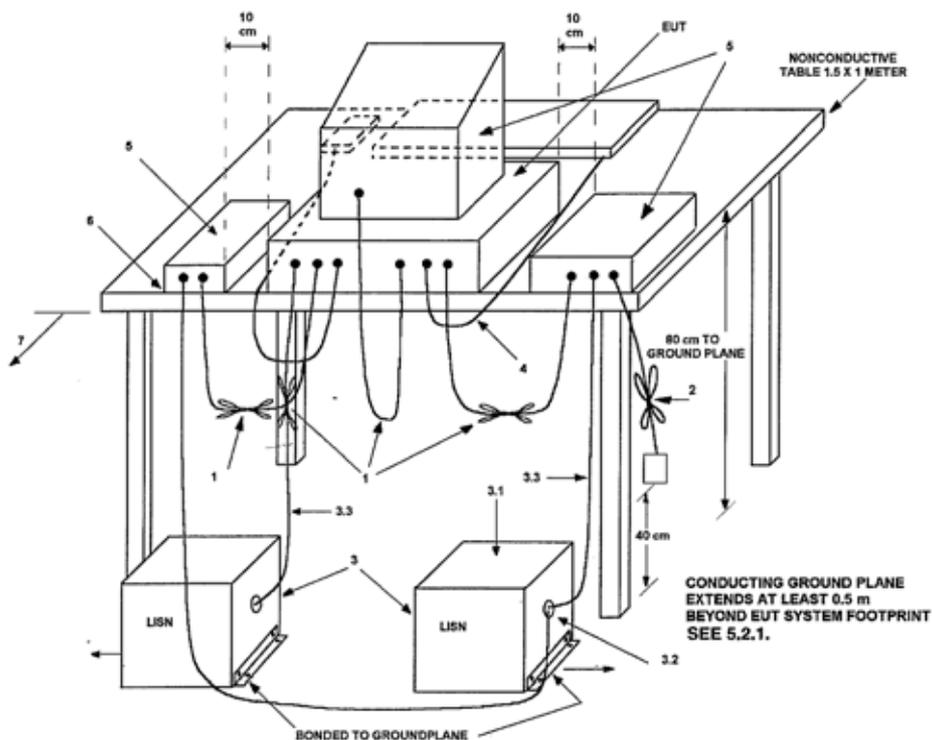

LEGEND:

- 1) Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long (see 6.1.4 and 11.2.4).
- 2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.1.4).
- 3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference groundplane (see 5.2.3 and 7.2.1).
 - 3.1) All other equipment powered from additional LISN(s).
 - 3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3) LISN at least 80 cm from nearest part of EUT chassis.
- 4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use (See 6.2.1.3 and 11.2.4).
- 5) Non-EUT components of EUT system being tested (see also Figure 13).
- 6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.1.1 and 6.2.1.2).
- 7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the groundplane (see 5.2.2 for options).

Test Procedure

Radiated Emission :

The EUT was tested according to ANSI 63.4-2003 for the requirements of FCC Part 15 Subpart C Section 15.227 & 15.209.

1. Measurement Frequencies below 30MHz :

During the test, the sample was placed on a turn table and operated under various modes with supply from new battery. The table is 0.8 meter and can rotate 360 degrees to determine the position of the maximum emission level. A loop antenna for the frequency range 9kHz - 30MHz, connected with 10 meters coaxial cable to the test receiver was used for measurement. The center of the loop 1 m above the floor, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

An initial pre-scan was performed to find out the maximum emission level of the sample placed at 3 orthogonal planes. Final measurement was then performed to record the data for fundamental emission within the operation band and spurious emissions outside the band under worst-case condition for combination of the antenna orientation and turn table position.

Note : Fundamental emission for this pulse modulated device was measured with the peak detector function of the test receiver and was properly adjusted for the duty cycle correction factor as pulse desensitization to calculate the average emission value.

2. Measurement Frequencies 30MHz – 1000 MHz :

During the test, the sample was also placed on a turn table and operated under various modes with supply from new battery. The table is 0.8 meter above the reference ground plane on the Open Aera Test Site and can rotate 360 degrees to determine the position of the maximum emission level. A broad-band antenna for the frequency range 30 - 1000 MHz, connected with 10 meters coaxial cable to the test receiver was used for measurement. The antenna is capable of measuring both horizontal and vertical polarizations. The antenna was raised from 1 to 4 meters to find out the maximum emission level from the EUT.

An initial pre-scan was performed to find out the maximum emission level of the sample placed at 3 orthogonal planes. Final measurement (30 MHz –1000 MHz) was then performed to record the data for the spurious emissions under worst-case condition for combination of the antenna orientation / height and turn table position.

Note : The Open Aera Test Site located at IECC was placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

Conducted Emission :

Not Applicable

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 11 of 17

Test Results

Radiated Emission :

Test Requirement:	FCC Part 15 Subpart C Section 15.227, 15.209
Test Method:	ANSI C63.4 : 2003
Deviations from Standard Test Method:	Nil
Frequency Range:	9kHz – 1000MHz
Measurement Distance:	3 m
Detector:	Peak (Measurement within the operation band) Quasi-Peak (Measurement outside the operation band)

Refer to page 12- 15 for emission measurement data
Refer to page 16 for band edge plot

Conducted Emission :

Not Applicable

Radiated Emission

Date : 2007-05-08

Page 12 of 17

Measurement of Radiated Emissions
FCC Part 15 Subpart C (15.227)

IECC Ref: 47741
Model: H6C-TX2038
Applicant: WAVECON ELECTRONICS LIMITED

Test Equipment
Receiver: ESCS 30 Rohde & Schwarz
Antenna: HFH2-Z2 Rohde & Schwarz

Sample No.: 1

Set under test: Radio Controller For Model Toys

Connected sets: -

Operating mode: Operate

Radiation Measurement (3 m) below 30MHz

a. Fundamental Frequency

Frequency (MHz)	Maximum Test Result (dB(μV/m))		FCC Limit (dB(μV/m))	
	Peak	Average *	Peak	Average
27.145	66.0	62.1	100	80

Note : (1) The above peak value is the maximum value of the measurement in 3 orthogonal planes

(2) * Calculation for radiation (average) :

Formula :

$$\text{Duty cycle} = (N1L1 + N2L2 + \dots + Nn-1Ln-1 + NnLn) / 100 \text{ or } T$$

where N1 is number of type 1 pluse, L1 is length of type 1 pulse, etc.
T is the period of the pulse train (if less than 100 ms)

According to the time domain plots shown in page 11 & 12 :

$$\text{Duty cycle of the EUT} = (4 \times 1.53 + 10 \times 0.54) / 18 = 0.64$$

$$\begin{aligned} \text{Av correction factor} &= 20 \times \log(0.64) \text{ dB} \\ &= -3.9 \text{ dB} \end{aligned}$$

$$\text{Radiation (average)} = \text{Radiation (peak)} + \text{Av correction factor}$$

$$\begin{aligned} \text{Radiation (average) of the EUT} &= 66.0 - 3.9 \text{ dB}(\mu\text{V/m}) \\ &= 62.1 \text{ dB}(\mu\text{V/m}) \end{aligned}$$


b. The measured radiation outside the operation band were negligible

Radiated Emission

Date : 2007-05-08

Page 13 of 17

Transmitter Emission - Time Domain Plots

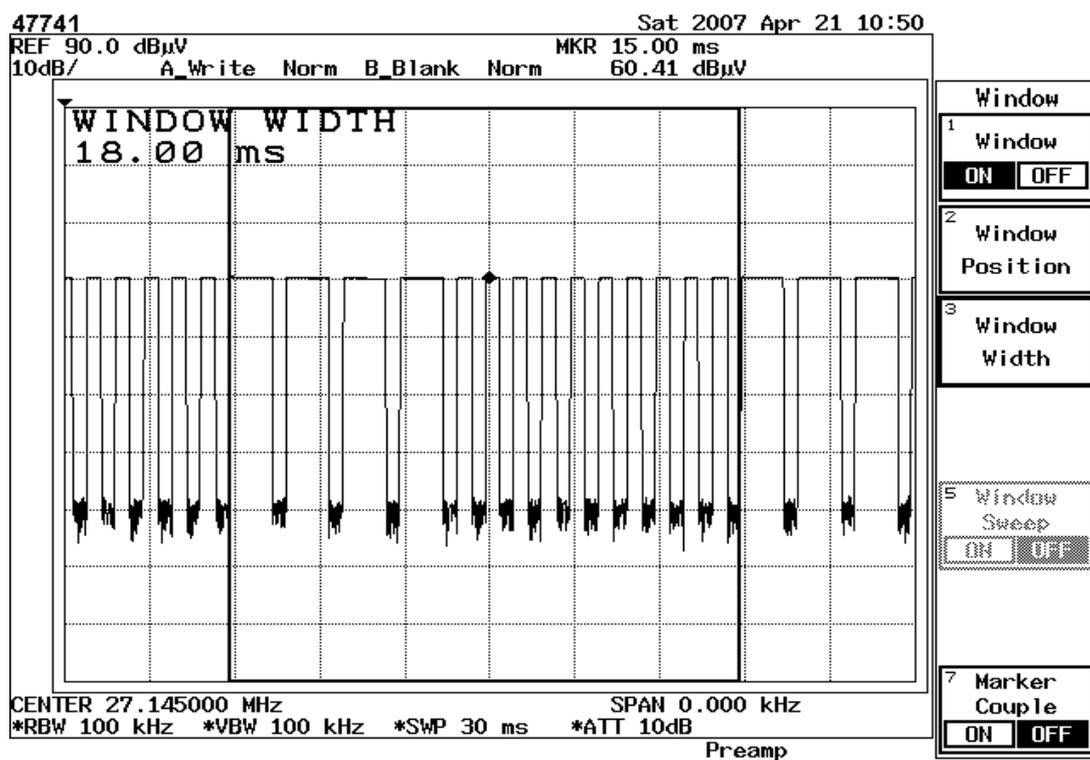


Pulse cycle period = 18 ms

Radiated Emission


Date : 2007-05-08

Page 14 of 17

Transmitter Emission - Time Domain Plots

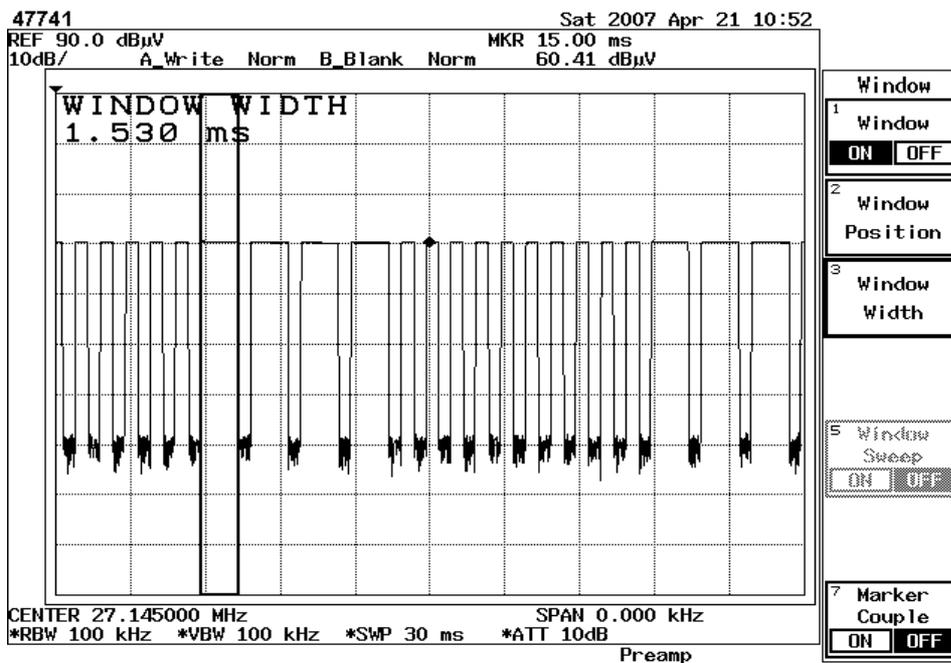

Pulse width = 1.53 ms (total number of pulse : 4)

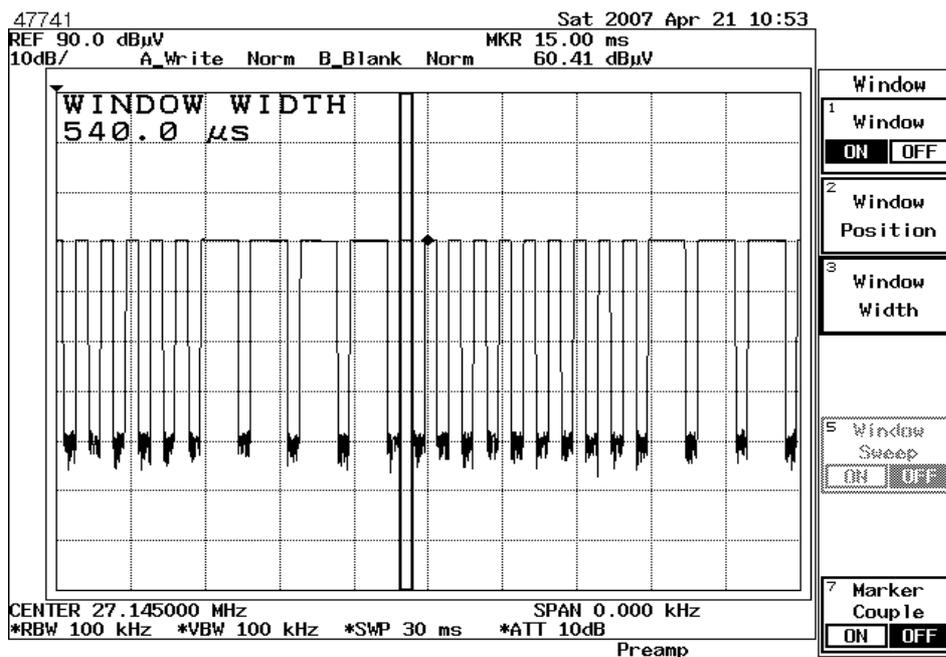

Pulse width = 0.54 ms (total number of pulse : 10)

Radiated Emission

Measurement of Radiated Emissions
FCC Part 15 Subpart C (15.209)

Date : 2007-05-08
Page 15 of 17

IECC Ref: 47741
 Model: H6C-TX2038
 Applicant: WAVECON ELECTRONICS
 LIMITED
 Sample No. : 1
 Set under test: Radio Controller For Model Toys
 Connected sets: -
 Operating mode: Operate

Test Equipment
 Receiver: ESCS 30 Rohde & Schwarz
 Antenna: Schaffner CBL6111C

Fundamental Frequency : 27.145 MHz

Radiation Measurement over 30MHz

	Frequency (MHz)	Horz. Reading dB(µV)	Vert. Reading dB(µV)	Corr. Factor (dB)	Horiz. Test Result dB(µV/m)	Vert. Test Result dB(µV/m)	Limit dB(µV/m)
Harm. 2	54.29	< 16	< 16	6.3	< 22.3	< 22.3	40.0
Harm. 3	81.44	< 16	< 16	7.4	< 23.4	< 23.4	40.0
Harm. 4	108.58	< 16	< 16	10.6	< 26.6	< 26.6	43.5
Harm. 5	135.73	< 16	< 16	11.5	< 27.5	< 27.5	43.5
Harm. 6	162.87	< 16	< 16	9.9	< 25.9	< 25.9	43.5
Harm. 7	190.02	< 16	< 16	8.6	< 24.6	< 24.6	43.5
Harm. 8	217.16	< 16	< 16	8.7	< 24.7	< 24.7	46.0
Harm. 9	244.31	< 16	< 16	11.9	< 27.9	< 27.9	46.0
Harm. 10	271.45	< 16	< 16	13.4	< 29.4	< 29.4	46.0
Harm. 11	298.60	< 16	< 16	13.8	< 29.8	< 29.8	46.0
Harm. 12	325.74	< 16	< 16	14.6	< 30.6	< 30.6	46.0
Harm. 13	352.89	< 16	< 16	15.4	< 31.4	< 31.4	46.0
Harm. 14	380.03	< 16	< 16	16.3	< 32.3	< 32.3	46.0
Harm. 15	407.18	< 16	< 16	17.0	< 33.0	< 33.0	46.0
Harm. 16	434.32	< 16	< 16	17.8	< 33.8	< 33.8	46.0
Harm. 17	461.47	< 16	< 16	18.4	< 34.4	< 34.4	46.0
Harm. 18	488.61	< 16	< 16	18.9	< 34.9	< 34.9	46.0
Harm. 19	515.76	< 16	< 16	19.4	< 35.4	< 35.4	46.0
Harm. 20	542.90	< 16	< 16	20.5	< 36.5	< 36.5	46.0
Harm. 21	570.05	< 16	< 16	21.1	< 37.1	< 37.1	46.0
Harm. 22	597.19	< 16	< 16	20.7	< 36.7	< 36.7	46.0
Harm. 23	624.34	< 16	< 16	21.9	< 37.9	< 37.9	46.0
Harm. 24	651.48	< 16	< 16	21.6	< 37.6	< 37.6	46.0
Harm. 25	678.63	< 16	< 16	22.0	< 38.0	< 38.0	46.0
Harm. 26	705.77	< 16	< 16	22.7	< 38.7	< 38.7	46.0
Harm. 27	732.92	< 16	< 16	23.9	< 39.9	< 39.9	46.0
Harm. 28	760.06	< 16	< 16	24.1	< 40.1	< 40.1	46.0
Harm. 29	787.21	< 16	< 16	24.0	< 40.0	< 40.0	46.0
Harm. 30	814.35	< 16	< 16	24.2	< 40.2	< 40.2	46.0
Harm. 31	841.50	< 16	< 16	25.3	< 41.3	< 41.3	46.0
Harm. 32	868.64	< 16	< 16	25.4	< 41.4	< 41.4	46.0
Harm. 33	895.79	< 16	< 16	25.3	< 41.3	< 41.3	46.0
Harm. 34	922.93	< 16	< 16	26.3	< 42.3	< 42.3	46.0
Harm. 35	950.08	< 16	< 16	27.6	< 43.6	< 43.6	46.0
Harm. 36	977.22	< 16	< 16	27.0	< 43.0	< 43.0	54.0

Note: Unless otherwise indicated, the recorded readings are in quasi-peak values.
 The above results were the worse case results with the sample positioned in all 3 axis during the test.

Operator : KS


FCC – Test Report

Date: 2007-05-08

No. 47741

Page 16 of 17

Measurement Data of Emissions within Band Edges

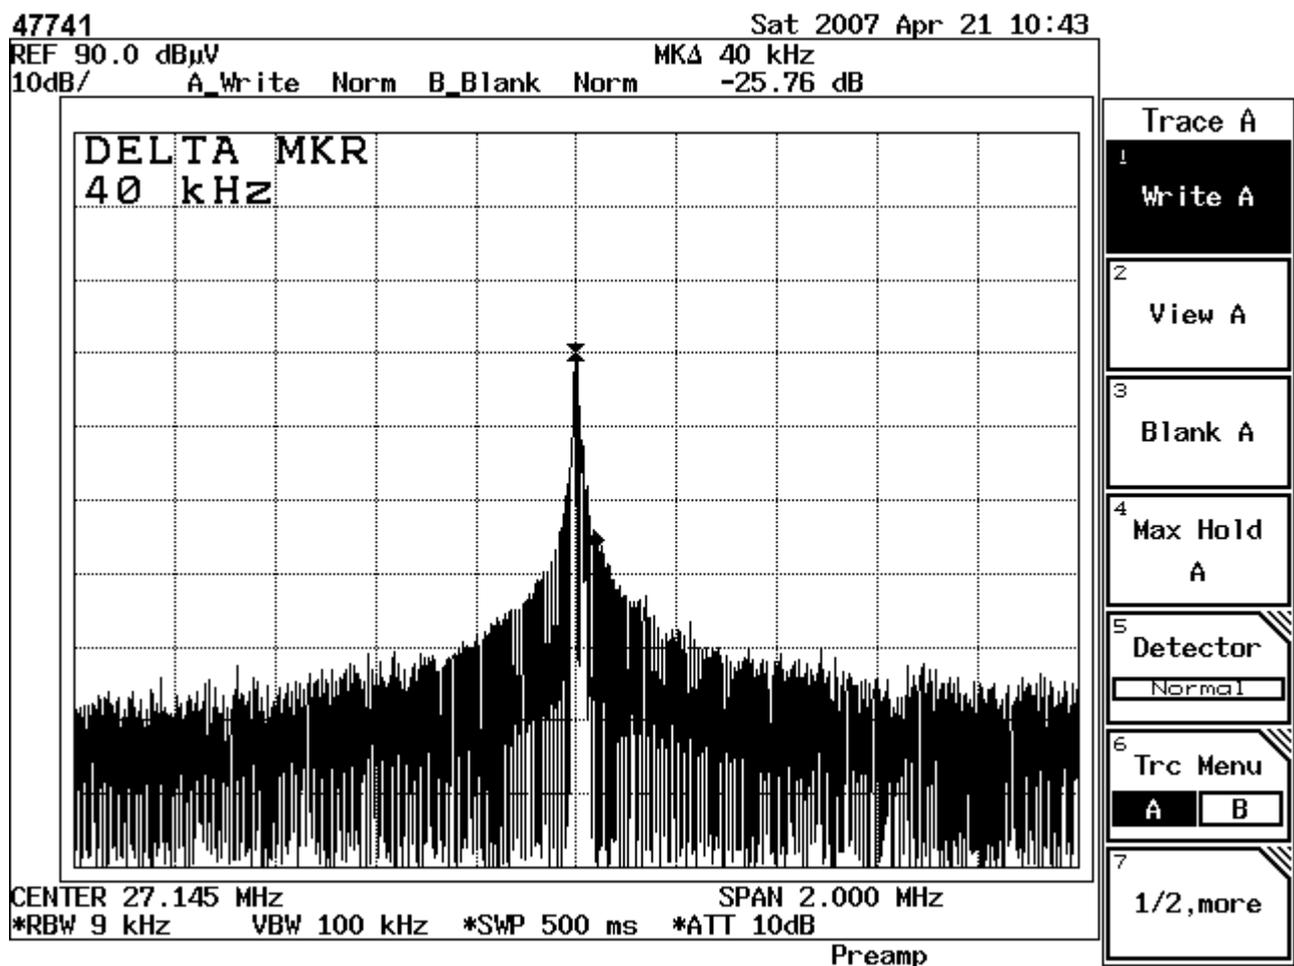

Result : The field strength of any emission within the operation band did not exceed 80 dB(μ V/m) for average value or 100 dB(μ V/m) for peak value. Refer to page 12 for the recorded value for the emission at the fundamental frequency.

FCC – Test Report

Date: 2007-05-08

No. 47741

Page 17 of 17

Photo of Sample

