



# Radio Test Report

**FCC ID: H8GG7750D**

This report concerns (check one) :  Original Grant  Class I Change

**Issued Date** : Mar. 31, 2012

**Project No.** : 1202106

**Equipment** : 2.4G RF Mouse

**Model Name** : G7-750D; G7-750N

**Applicant** : A-FOUR TECH CO., LTD.

**Address** : 6F, No. 108, Min-Chuan Rd., Hsin-Tien,  
Taipei, Taiwan, R.O.C.

**Tested by:** Neutron Engineering Inc. EMC Laboratory

**Date of Receipt:** Mar. 07, 2012

**Date of Test:** Mar. 07, 2012 ~ Mar. 14, 2012

**Testing Engineer:** Rush Kao

(Rush Kao)

**Technical Manager:** Jeff Yang

(Jeff Yang)

**Authorized Signatory:** Andy Chiu

(Andy Chiu)

**Neutron Engineering Inc.**

B1, No. 37, Lane 365, YangGuang St.,  
NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





## Declaration

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

**Neutron**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>2.1 TEST FACILITY</b>	<b>7</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>7</b>
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>8</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>10</b>
<b>3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>11</b>
<b>3.4 DESCRIPTION OF SUPPORT UNITS</b>	<b>12</b>
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
<b>4.1 RADIATED EMISSION MEASUREMENT</b>	<b>13</b>
<b>4.1.1 RADIATED EMISSION LIMITS</b>	<b>13</b>
<b>4.1.2 MEASUREMENT INSTRUMENTS LIST</b>	<b>14</b>
<b>4.1.3 TEST PROCEDURE</b>	<b>15</b>
<b>4.1.4 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>4.1.5 TEST SETUP</b>	<b>16</b>
<b>4.1.6 EUT OPERATING CONDITIONS</b>	<b>16</b>
<b>4.1.7 TEST RESULTS-BETWEEN 30MHz – 1000MHz</b>	<b>17</b>
<b>4.1.8 TEST RESULTS-ABOVE 1000MHz</b>	<b>19</b>
<b>4.1.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS</b>	<b>31</b>
<b>5 . BANDWIDTH TEST</b>	<b>37</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	<b>37</b>
<b>5.1.1 MEASUREMENT INSTRUMENTS LIST</b>	<b>37</b>
<b>5.1.2 TEST PROCEDURE</b>	<b>37</b>
<b>5.1.3 DEVIATION FROM STANDARD</b>	<b>37</b>
<b>5.1.4 TEST SETUP</b>	<b>37</b>
<b>5.1.5 EUT OPERATION CONDITIONS</b>	<b>37</b>
<b>5.1.6 TEST RESULTS</b>	<b>38</b>
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>40</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>40</b>
<b>6.1.1 MEASUREMENT INSTRUMENTS LIST</b>	<b>40</b>
<b>6.1.2 TEST PROCEDURE</b>	<b>40</b>
<b>6.1.3 DEVIATION FROM STANDARD</b>	<b>40</b>
<b>6.1.4 TEST SETUP</b>	<b>40</b>
<b>6.1.5 EUT OPERATION CONDITIONS</b>	<b>40</b>
<b>6.1.6 TEST RESULTS</b>	<b>41</b>



Table of Contents	Page
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>42</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>42</b>
<b>7.1.1 MEASUREMENT INSTRUMENTS LIST</b>	<b>42</b>
<b>7.1.2 TEST PROCEDURE</b>	<b>42</b>
<b>7.1.3 DEVIATION FROM STANDARD</b>	<b>42</b>
<b>7.1.4 TEST SETUP</b>	<b>42</b>
<b>7.1.5 EUT OPERATION CONDITIONS</b>	<b>42</b>
<b>7.1.6 TEST RESULTS</b>	<b>43</b>
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>47</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>47</b>
<b>8.1.1 MEASUREMENT INSTRUMENTS LIST</b>	<b>47</b>
<b>8.1.2 TEST PROCEDURE</b>	<b>47</b>
<b>8.1.3 DEVIATION FROM STANDARD</b>	<b>47</b>
<b>8.1.4 TEST SETUP</b>	<b>47</b>
<b>8.1.5 EUT OPERATION CONDITIONS</b>	<b>47</b>
<b>8.1.6 TEST RESULTS</b>	<b>48</b>
<b>9 . RF EXPOSURE TEST</b>	<b>50</b>
<b>9.1 APPLIED PROCEDURES / LIMIT</b>	<b>50</b>
<b>9.1.1 MEASUREMENT INSTRUMENTS LIST</b>	<b>50</b>
<b>9.1.2 MPE CALCULATION METHOD &amp; TEST RESULTS</b>	<b>50</b>
<b>10 . EUT TEST PHOTO</b>	<b>51</b>



## **1. CERTIFICATION**

Equipment: 2.4G RF Mouse

Brand Name: A4TECH

Model Name: G7-750D; G7-750N

Applicant: A-FOUR TECH CO., LTD.

Date of Test: Mar. 07, 2012 ~ Mar. 14, 2012

Standards: FCC Part15, Subpart C: 2010(15.247) / ANCI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1202106) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15, Subpart C: 2010</b>			
Standard Section	Test Item	Judgment	Remark
<b>15.207</b>	Conducted Emission	N/A	
<b>15.247 (c)</b>	Antenna conducted Spurious Emission	PASS	
<b>15.247 (a)(2)</b>	6dB Bandwidth	PASS	
<b>15.247 (b)</b>	Peak Output Power	PASS	
<b>15.247 (c)</b>	Radiated Spurious Emission	PASS	
<b>15.247 (d)</b>	Power Spectral Density	PASS	
<b>15.203</b>	Antenna Requirement	PASS	
<b>1.1307 1.1310 2.1091 2.1093</b>	RF Exposure Compliance	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054;  
IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08	ANSI	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.35	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1000MHz ~ 18000MHz	V	4.05	
		1000MHz ~ 18000MHz	H	3.97	
		18000MHz ~ 40000MHz	V	4.04	
		18000MHz ~ 40000MHz	H	4.01	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .



## 3. GENERAL INFORMATION

### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G RF Mouse												
Brand Name	A4TECH												
Model Name	G7-750D; G7-750N												
OEM Brand/Model Name	N/A												
Model Difference	<p>All models are based on similar electrical circuit except the difference of list below:</p> <table border="1"><tr><td>Model Name</td><td>Lens Type</td></tr><tr><td>G7-750D</td><td>Holeless (Sealed lens, completely closed bottom, without any sensor opening)</td></tr><tr><td>G7-750N</td><td>V-Track (Vertical reinforced light, tiny lens hole)</td></tr></table> <p>All models have two optional sets of Boost IC+Schottky Diode:</p> <table border="1"><tr><td>No.</td><td>Boost IC+Schottky Diode</td></tr><tr><td>1</td><td>Schottky Diode is in the Boost IC (U3) and nothing on PCB location D2.</td></tr><tr><td>2</td><td>Schottky Diode is not in the Boost IC (U3) but on PCB location D2.</td></tr></table> <p>All the above models were tested, and the model: G7-740DX (No. 1) was found to be the worst case during the pre-scanning test. This model of the worst case was used for final testing and collecting test data included in this report.</p>	Model Name	Lens Type	G7-750D	Holeless (Sealed lens, completely closed bottom, without any sensor opening)	G7-750N	V-Track (Vertical reinforced light, tiny lens hole)	No.	Boost IC+Schottky Diode	1	Schottky Diode is in the Boost IC (U3) and nothing on PCB location D2.	2	Schottky Diode is not in the Boost IC (U3) but on PCB location D2.
Model Name	Lens Type												
G7-750D	Holeless (Sealed lens, completely closed bottom, without any sensor opening)												
G7-750N	V-Track (Vertical reinforced light, tiny lens hole)												
No.	Boost IC+Schottky Diode												
1	Schottky Diode is in the Boost IC (U3) and nothing on PCB location D2.												
2	Schottky Diode is not in the Boost IC (U3) but on PCB location D2.												
Product Description	<p>The EUT is a 2.4G RF Mouse.</p> <table border="1"><tr><td>Operation Frequency:</td><td>2407~2473MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Number Of Channel</td><td>14CH (Note 2)</td></tr><tr><td>Antenna Designation:</td><td>Please refer to the Note 3.</td></tr><tr><td>Antenna Gain(Peak)</td><td>Please refer to the Note 3.</td></tr><tr><td>Output Power:</td><td>-6.34 dBm (Max.)</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2407~2473MHz	Modulation Type:	GFSK	Number Of Channel	14CH (Note 2)	Antenna Designation:	Please refer to the Note 3.	Antenna Gain(Peak)	Please refer to the Note 3.	Output Power:	-6.34 dBm (Max.)
Operation Frequency:	2407~2473MHz												
Modulation Type:	GFSK												
Number Of Channel	14CH (Note 2)												
Antenna Designation:	Please refer to the Note 3.												
Antenna Gain(Peak)	Please refer to the Note 3.												
Output Power:	-6.34 dBm (Max.)												
Power Source	Battery supplied												
Power Rating	DC 1.5V												
Connecting I/O Port(s)	Please refer to the User's Manual												
Products Covered	NA												

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2407	06	2430	11	2456
02	2411	07	2434	12	2460
03	2415	08	2437	13	2468
04	2422	09	2445	14	2473
05	2426	10	2451		

3. Table of Filed Antenna:

Antenna	Brand	Model Name	Type	Connector Type	Gain (dBi)
1	N/A	N/A	Ant. On PCB	N/A	-5.24



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Test Mode	Description
Mode 1	2407MHz
Mode 2	2437MHz
Mode 3	2473MHz

For Radiated Test (30 -1000MHz)	
Final Test Mode	Description
Mode 2	2437MHz

For Radiated Test (Above 1000MHz)	
Final Test Mode	Description
Mode 1	2407MHz
Mode 2	2437MHz
Mode 3	2473MHz



**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

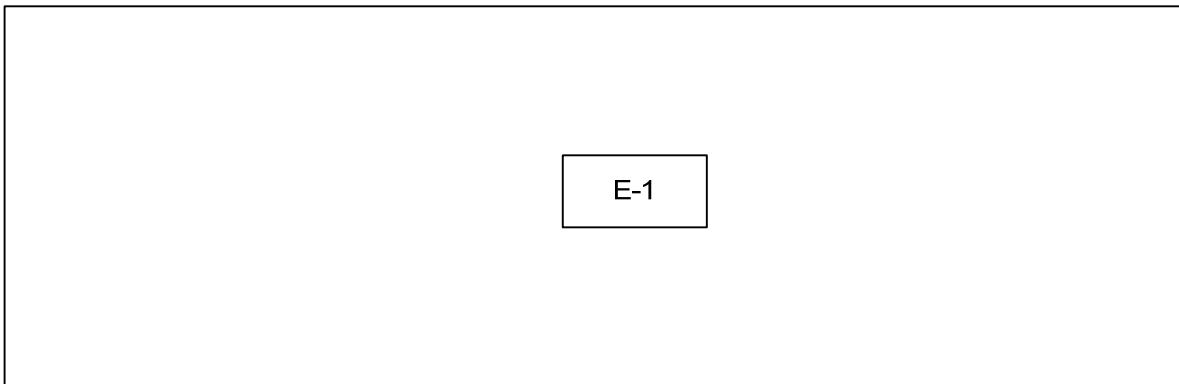



## 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	2.4G RF Mouse	A4TECH	G7-750D	H8GG7750D	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 4. EMC EMISSION TEST

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value



#### **4.1.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 06, 2012
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Dec. 15, 2012
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 18, 2012
4	Microflex Cable	N/A	N/A	1m	May. 18, 2012
5	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 21, 2012
6	Microflex Cable	N/A	N/A	3m	Aug. 21, 2012
7	Test Cable	N/A	LMR-400	966_12m	Jun. 16, 2012
8	Test Cable	N/A	LMR-400	966_3m	Jun. 16, 2012
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 02, 2012
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 20, 2012

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.



### 4.1.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- h. EUT Orthogonal Axis :  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- i. During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

#### NOTE: (30-1000MHz)

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=120 kHz, VBW =120 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

#### NOTE: (Above 1000MHz)

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.




## 4.1.4 DEVIATION FROM TEST STANDARD


No deviation

## 4.1.5 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

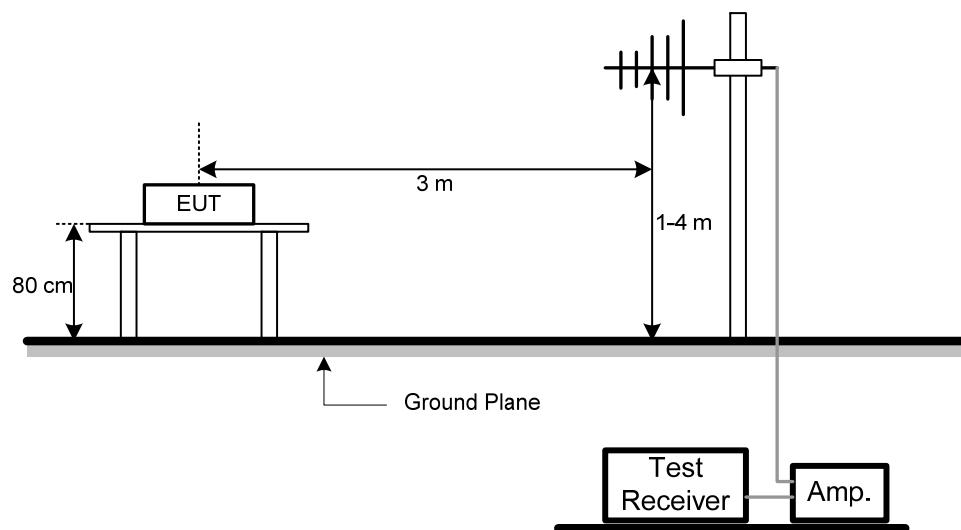

Radiated Emission Test Set-Up Frequency Above 1 GHz

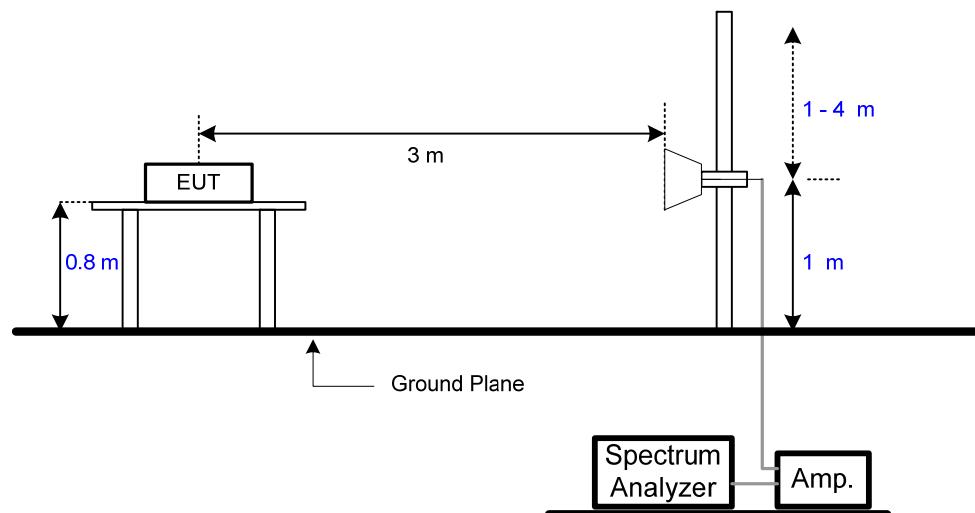


## 4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operation condition was tested and used to collect the included data.

**4.1.7 TEST RESULTS-BETWEEN 30MHz – 1000MHz**

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

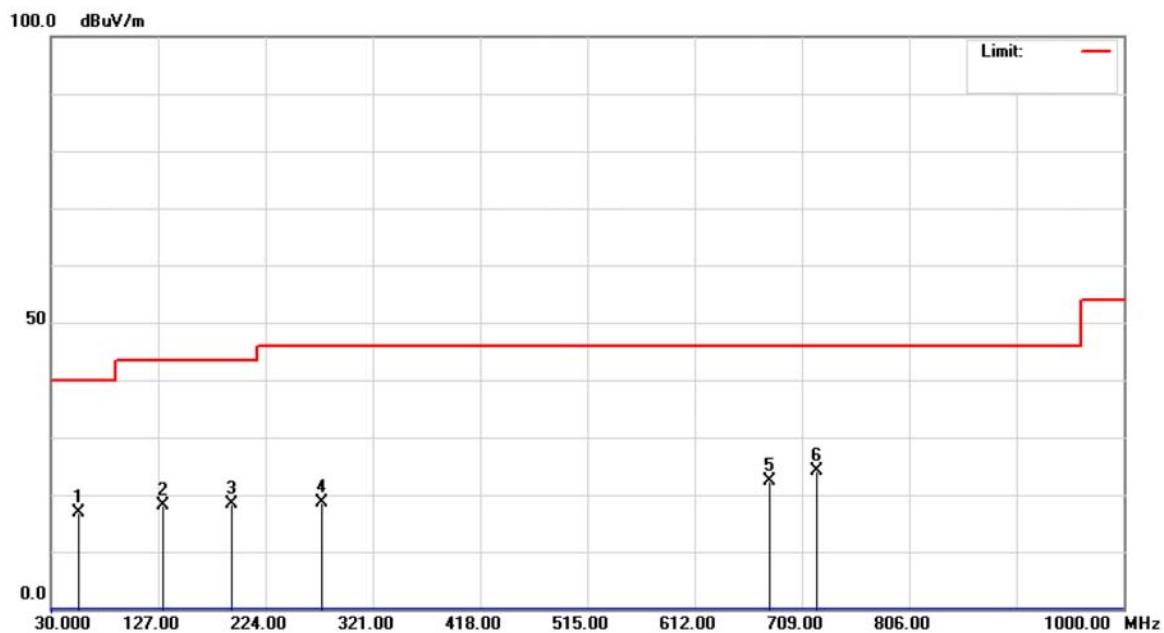
**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			Level						
MHz		dBuV	dB	dBuV/m	dBuV/m	dB			
1	55.2200	29.62	-12.82	16.80	40.00	-23.20	peak		
2	130.8800	32.50	-14.26	18.24	43.50	-25.26	peak		
3	192.9600	34.64	-16.16	18.48	43.50	-25.02	peak		
4	274.4400	31.92	-13.24	18.68	46.00	-27.32	peak		
5	679.9000	27.07	-4.78	22.29	46.00	-23.71	peak		
6	* 722.5800	28.16	-4.05	24.11	46.00	-21.89	peak		



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

### Polarization: Horizontal

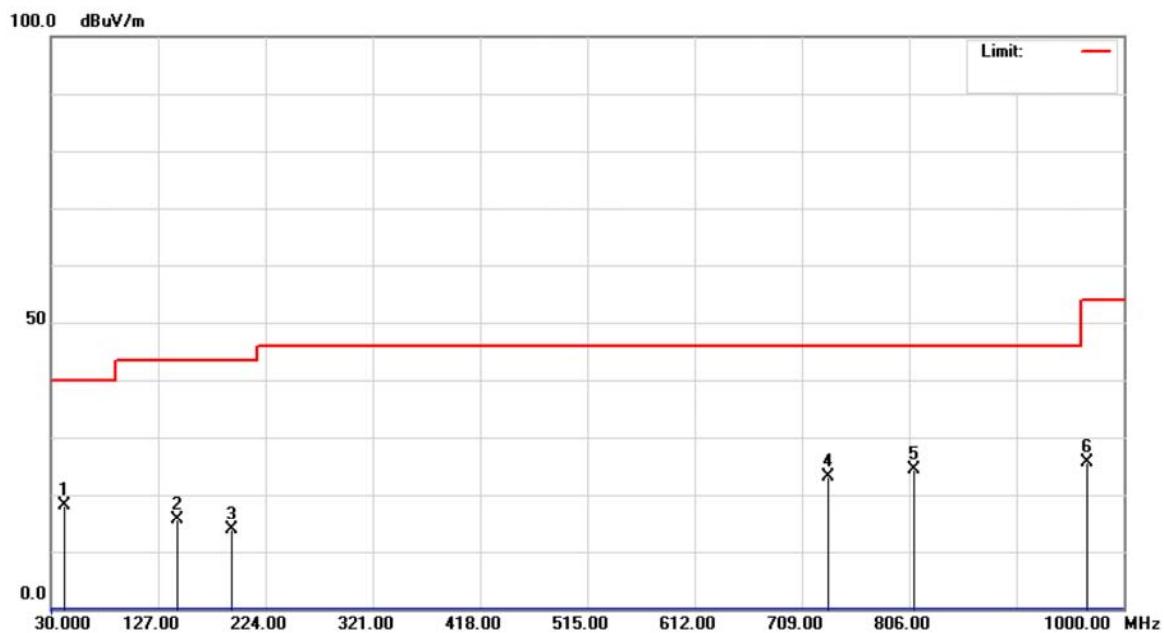


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
							dB	Detector
1		41.6400	30.40	-12.35	18.05	40.00	-21.95	peak
2		144.4600	28.95	-13.22	15.73	43.50	-27.77	peak
3		192.9600	30.00	-16.16	13.84	43.50	-29.66	peak
4		732.2800	27.01	-3.84	23.17	46.00	-22.83	peak
5	*	809.8800	27.10	-2.83	24.27	46.00	-21.73	peak
6		967.0200	27.32	-1.67	25.65	54.00	-28.35	peak



#### 4.1.8 TEST RESULTS-ABOVE 1000MHz

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz		

**Polarization: Vertical**

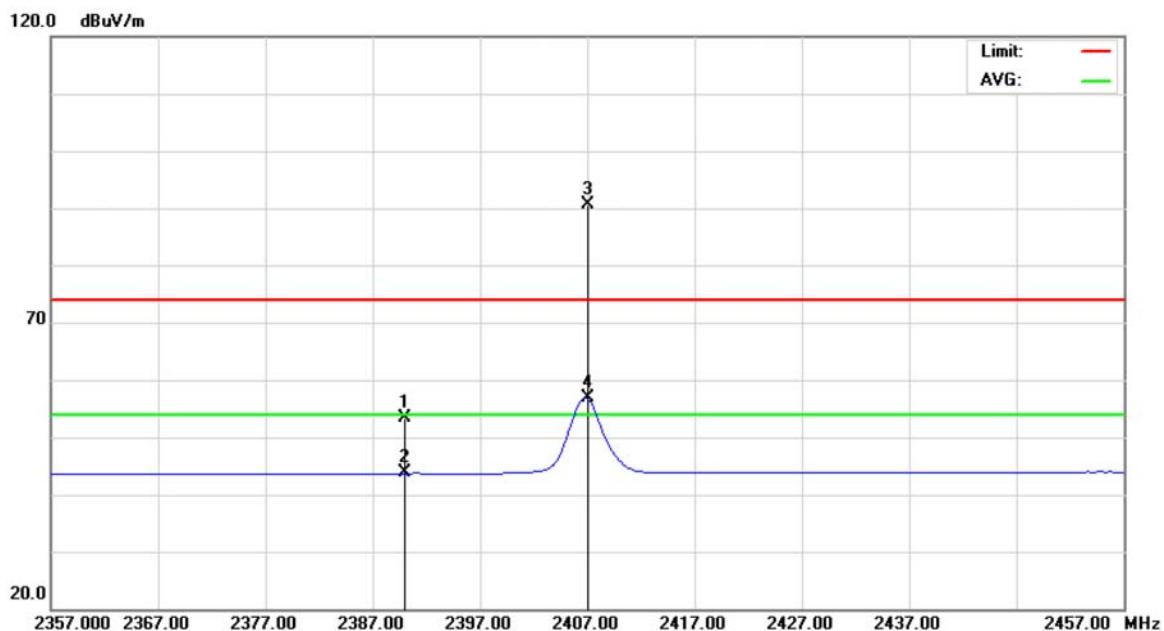


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	21.04	32.32	53.36	74.00	-20.64		peak
2		2390.000	11.47	32.32	43.79	54.00	-10.21		AVG
3	*	2407.000	58.28	32.41	90.69	74.00	16.69		peak
4	X	2407.000	24.39	32.41	56.80	54.00	2.80		AVG



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz		

### Polarization: Vertical

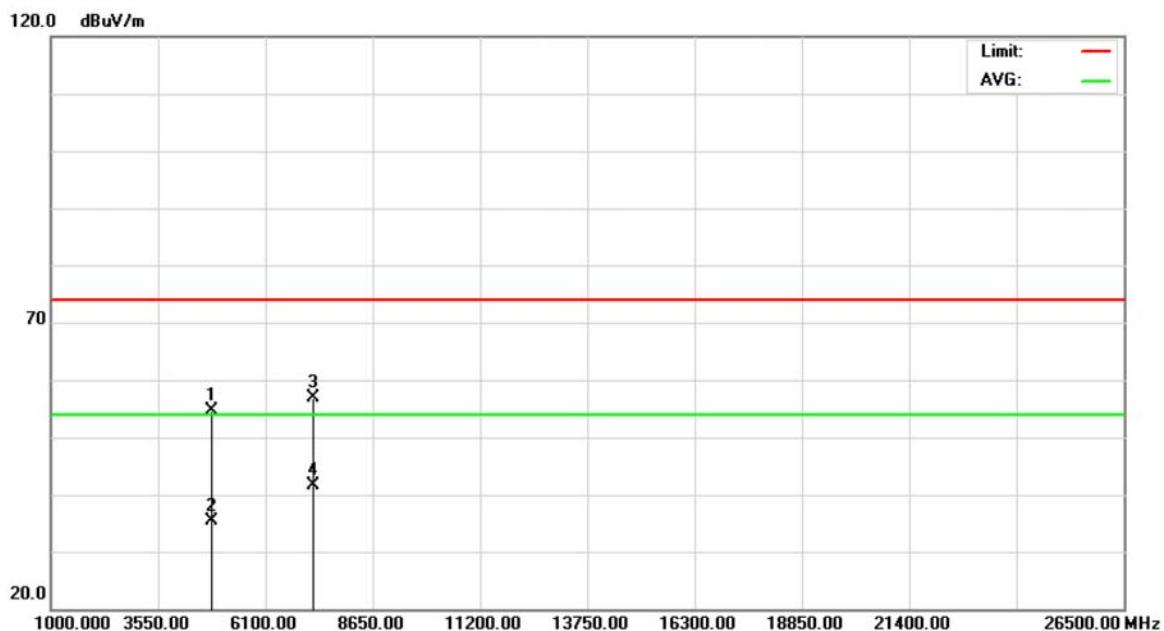


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4812.640	51.36	3.16	54.52	74.00	-19.48	peak	
2		4812.640	32.30	3.16	35.46	54.00	-18.54	AVG	
3		7221.000	46.58	10.41	56.99	74.00	-17.01	peak	
4	*	7221.000	31.24	10.41	41.65	54.00	-12.35	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz		

### Polarization: Horizontal

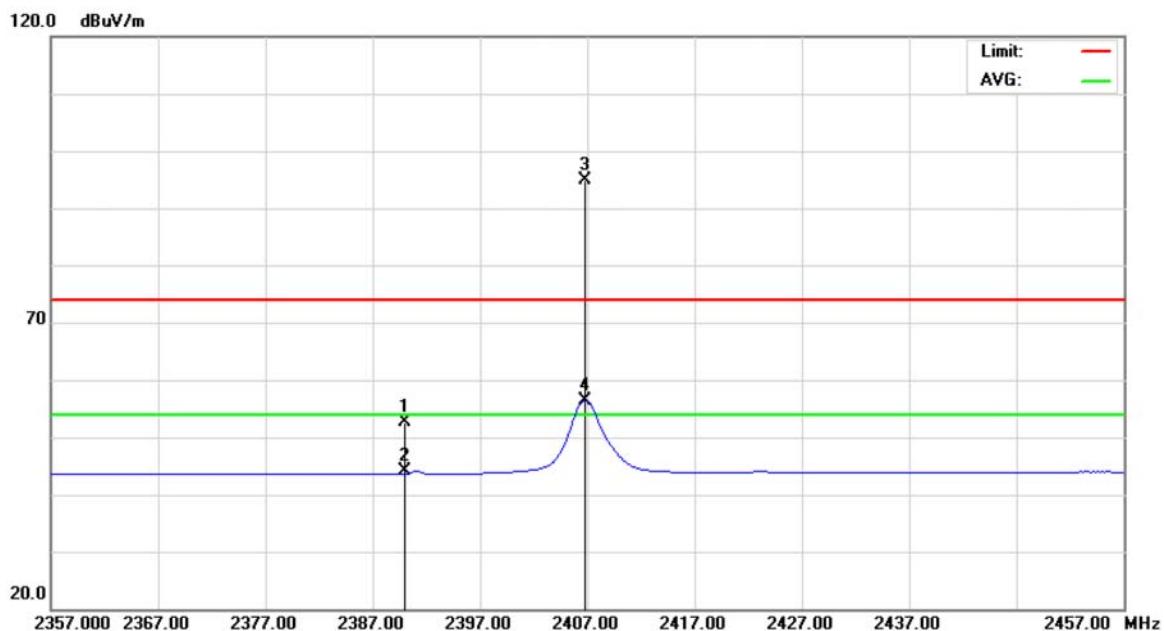


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	20.36	32.32	52.68	74.00	-21.32	peak	
2		2390.000	11.73	32.32	44.05	54.00	-9.95	AVG	
3	*	2406.800	62.57	32.41	94.98	74.00	20.98	peak	
4	X	2406.800	24.05	32.41	56.46	54.00	2.46	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz		

### Polarization: Horizontal

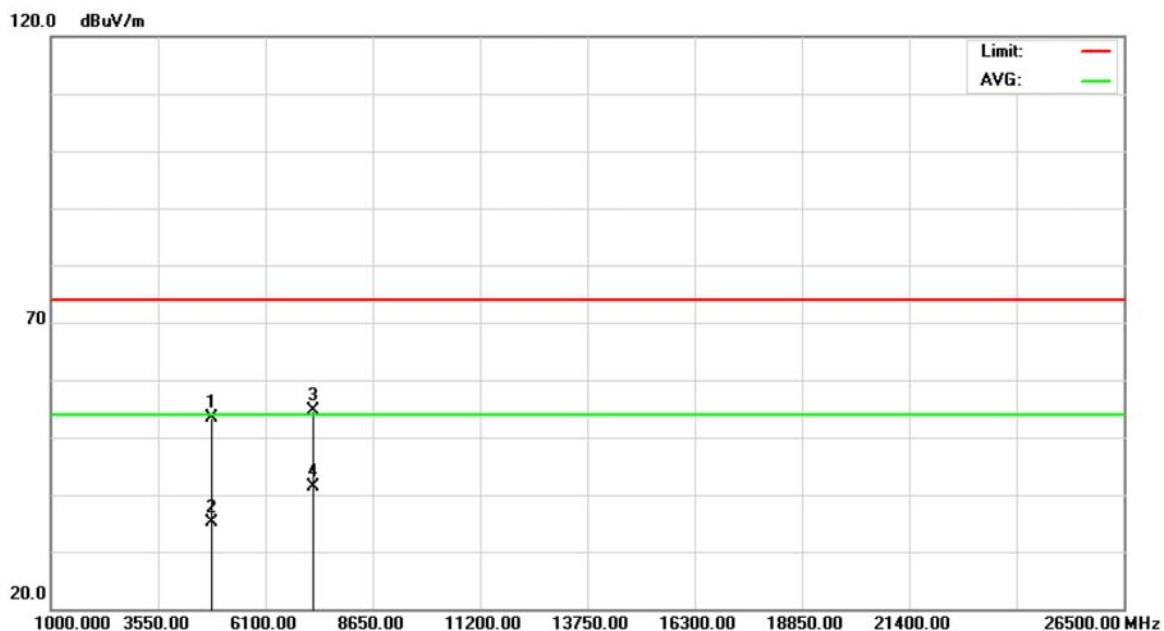


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4812.560	50.24	3.16	53.40	74.00	-20.60	peak	
2		4812.560	31.94	3.16	35.10	54.00	-18.90	AVG	
3		7221.000	44.10	10.41	54.51	74.00	-19.49	peak	
4	*	7221.000	30.91	10.41	41.32	54.00	-12.68	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

### Polarization: Vertical

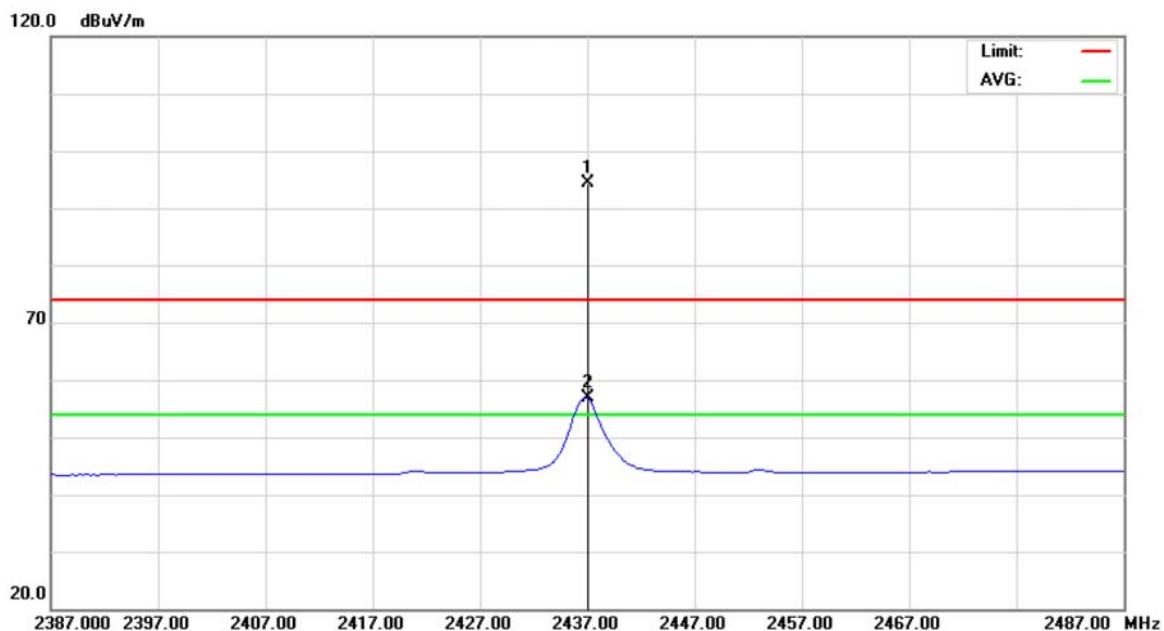


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	2437.000	61.88	32.56	94.44	74.00	20.44	peak	
2	X	2437.000	24.28	32.56	56.84	54.00	2.84	Avg	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

### Polarization: Vertical

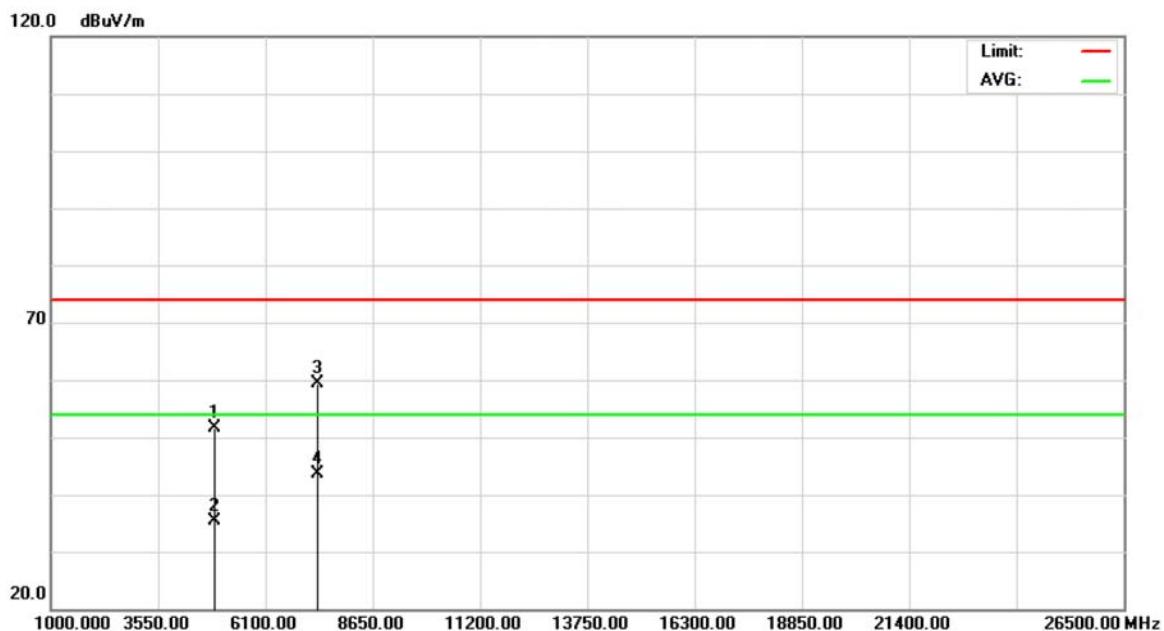


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4874.000	48.25	3.29	51.54	74.00	-22.46	peak	
2		4874.000	32.12	3.29	35.41	54.00	-18.59	AVG	
3		7311.000	48.89	10.55	59.44	74.00	-14.56	peak	
4	*	7311.000	33.15	10.55	43.70	54.00	-10.30	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

### Polarization: Horizontal

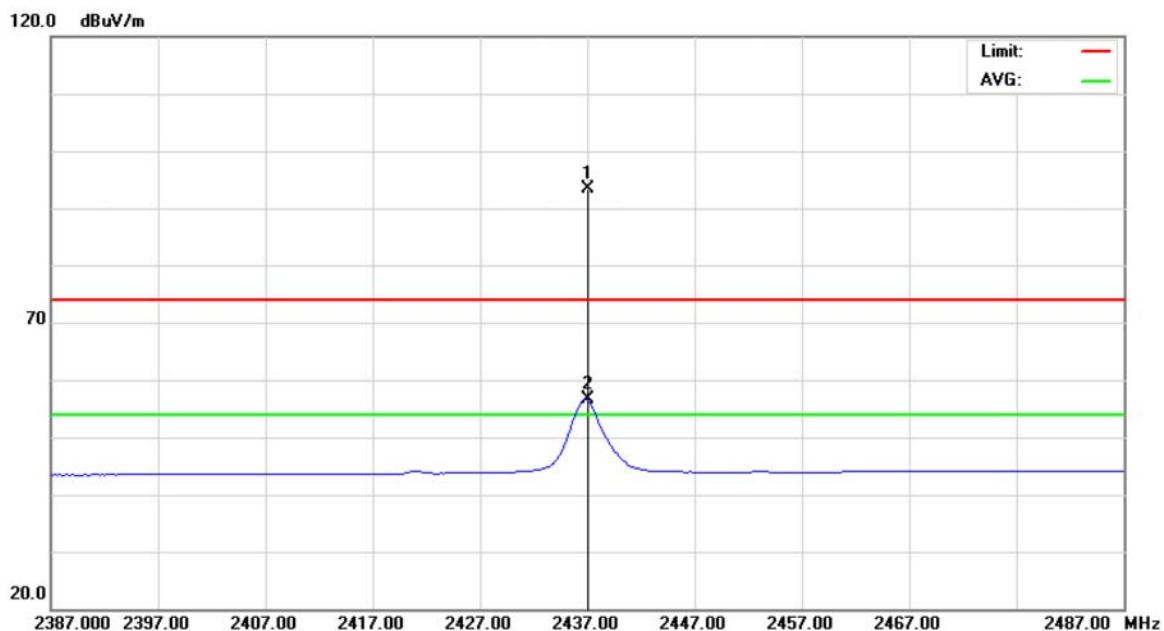


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	2437.000	60.85	32.56	93.41	74.00	19.41	peak	
2	X	2437.000	23.97	32.56	56.53	54.00	2.53	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2437MHz		

### Polarization: Horizontal

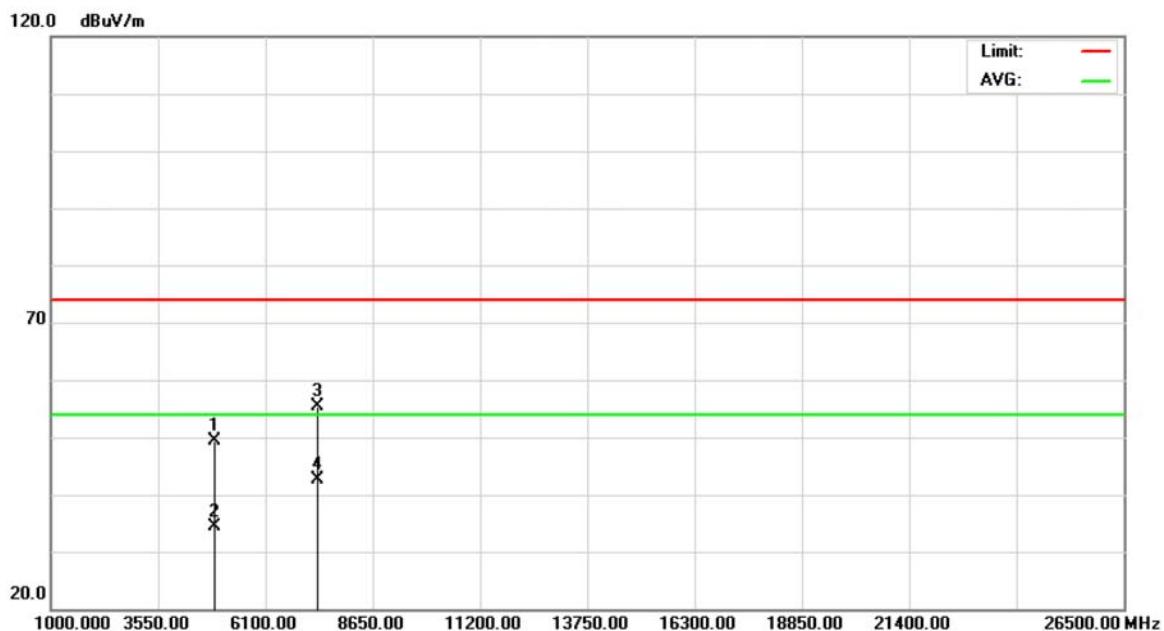


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4874.000	46.18	3.29	49.47	74.00	-24.53	peak	
2		4874.000	31.17	3.29	34.46	54.00	-19.54	AVG	
3		7311.000	44.89	10.55	55.44	74.00	-18.56	peak	
4	*	7311.000	32.03	10.55	42.58	54.00	-11.42	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2473MHz		

### Polarization: Vertical

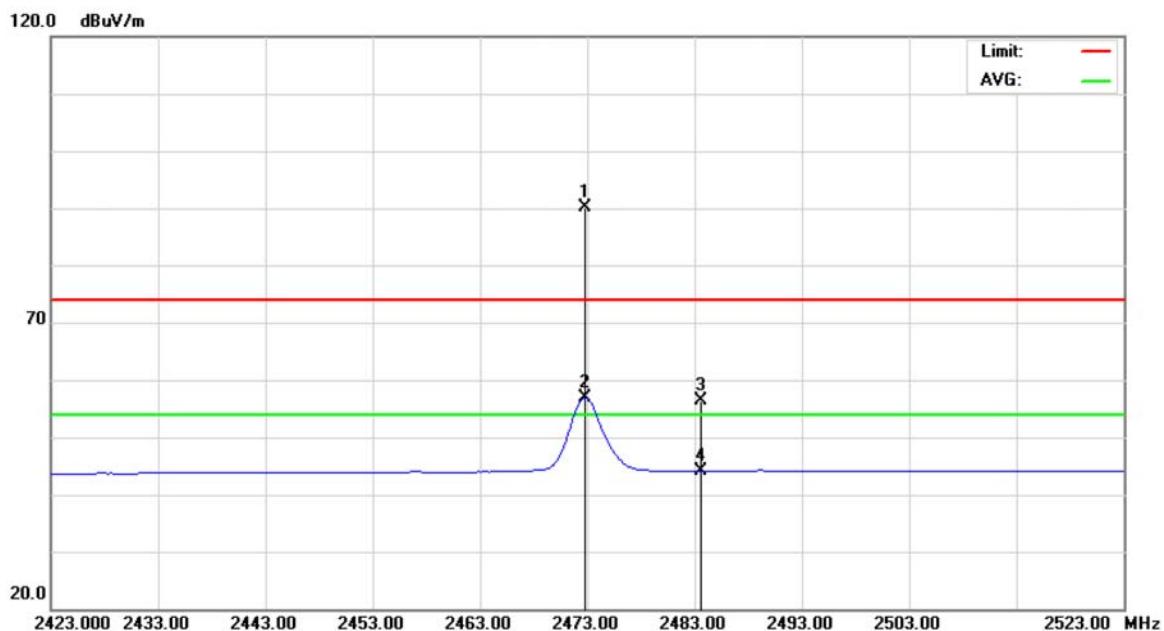


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	2472.800	57.31	32.73	90.04	74.00	16.04	peak	
2	X	2472.800	24.22	32.73	56.95	54.00	2.95	AVG	
3		2483.500	23.64	32.79	56.43	74.00	-17.57	peak	
4		2483.500	11.28	32.79	44.07	54.00	-9.93	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2473MHz		

### Polarization: Vertical

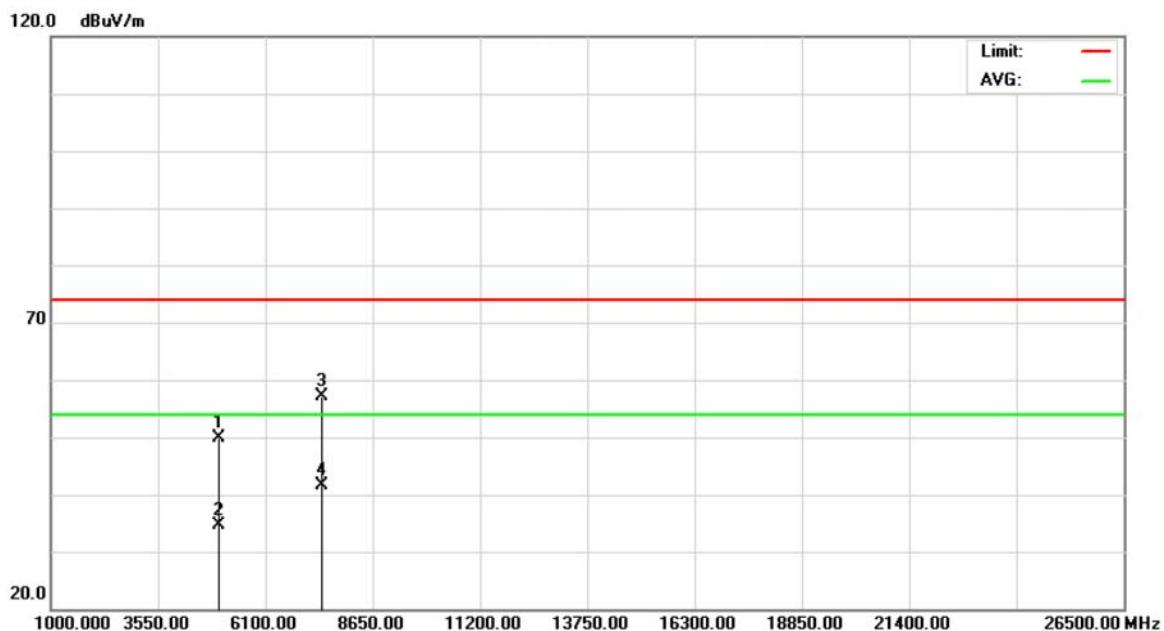


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4946.040	46.55	3.44	49.99	74.00	-24.01	peak	
2		4946.040	31.20	3.44	34.64	54.00	-19.36	Avg	
3		7419.594	46.36	10.72	57.08	74.00	-16.92	peak	
4	*	7419.594	30.97	10.72	41.69	54.00	-12.31	Avg	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2473MHz		

### Polarization: Horizontal

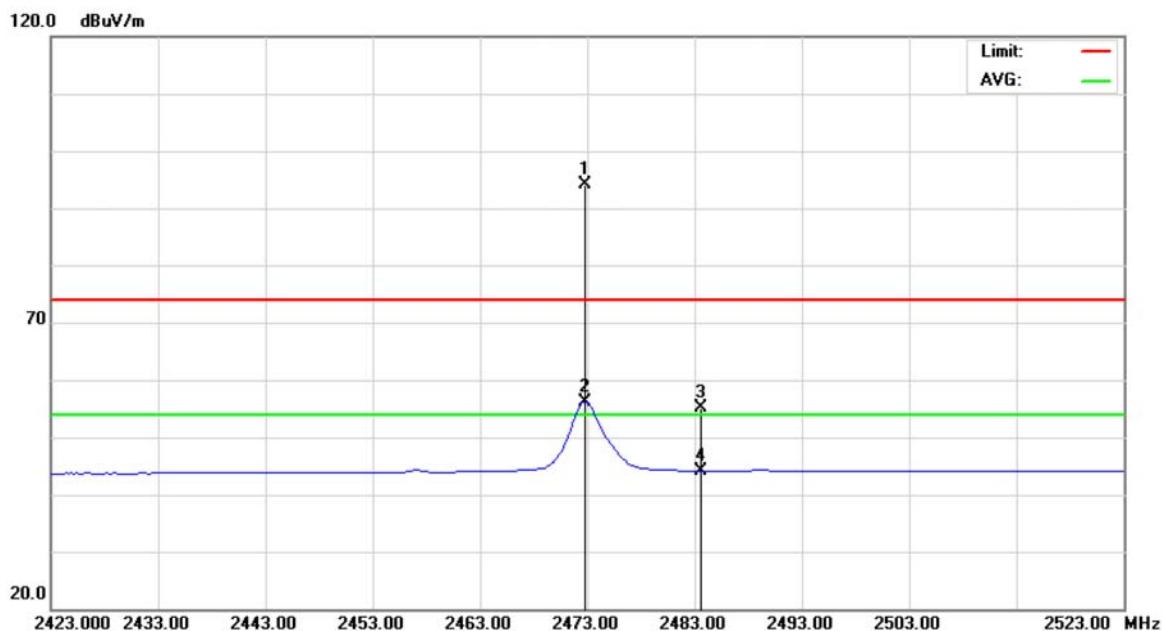


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	2472.800	61.28	32.73	94.01	74.00	20.01	peak	
2	X	2472.800	23.49	32.73	56.22	54.00	2.22	AVG	
3		2483.500	22.24	32.79	55.03	74.00	-18.97	peak	
4		2483.500	11.34	32.79	44.13	54.00	-9.87	AVG	



EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26°C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2473MHz		

### Polarization: Horizontal

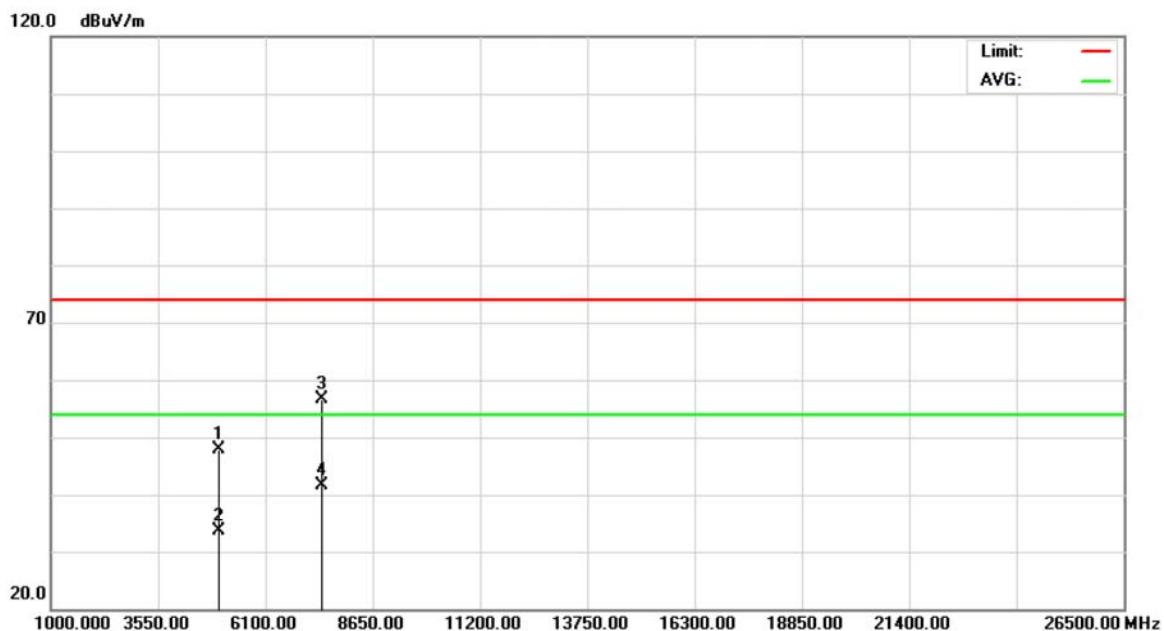

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4946.960	44.45	3.44	47.89	74.00	-26.11	peak	
2		4946.960	30.12	3.44	33.56	54.00	-20.44	AVG	
3		7418.680	45.82	10.72	56.54	74.00	-17.46	peak	
4	*	7418.680	30.80	10.72	41.52	54.00	-12.48	AVG	


**4.1.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS**

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26 °C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	TX CH 2407MHz/2473MHz(Vertical)		
Note :	<p>The emission of the carrier radiated field strength is measured for (Peak and AV) as following:</p> <ol style="list-style-type: none"><li>1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (2407MHz). Then the field strength was measured at 2310-2390 MHz.</li><li>2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (2473MHz). Then the field strength was measured at 2483.5-2500 MHz.</li></ol>		



2407MHz/ Orthogonal Axes: X

Polarization: Vertical

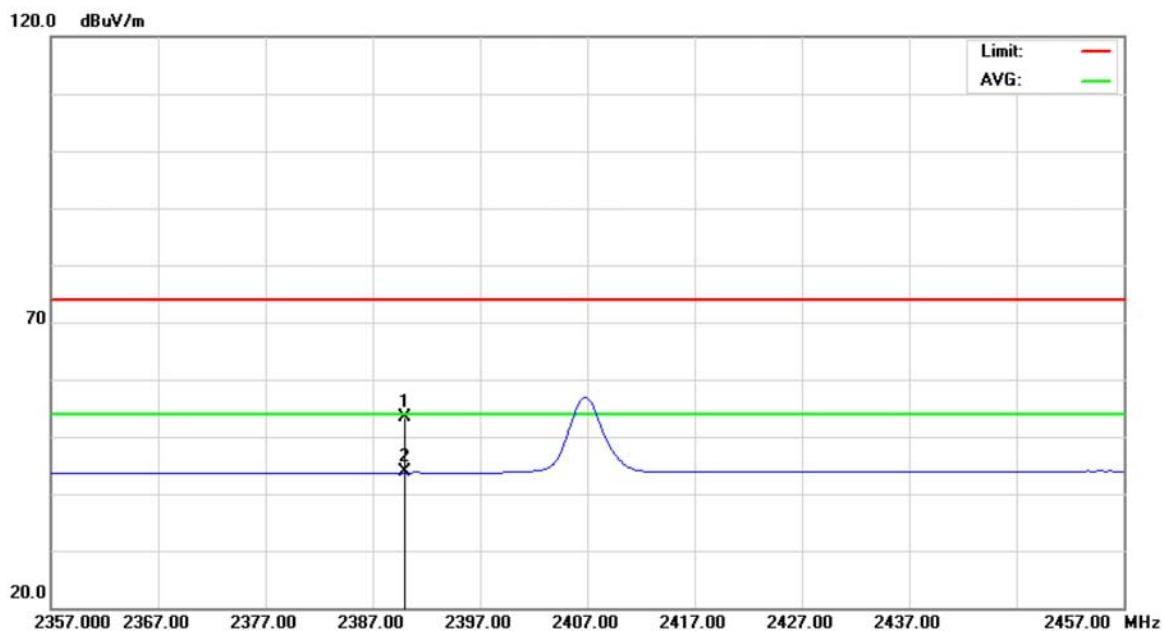


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		2390.000	21.04	32.32	53.36	74.00	-20.64	peak
2	*	2390.000	11.47	32.32	43.79	54.00	-10.21	AVG



2473MHz/ Orthogonal Axes: X

Polarization: Vertical

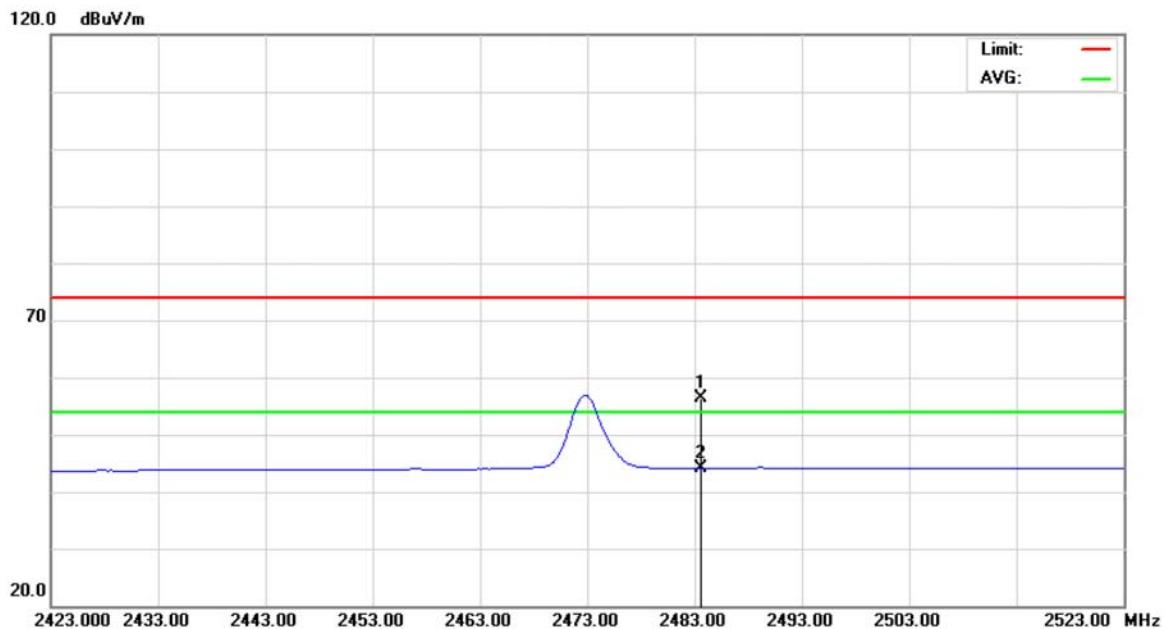

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	23.64	32.79	56.43	74.00	-17.57	peak	
2	*	2483.500	11.28	32.79	44.07	54.00	-9.93	AVG	




EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26 °C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	TX CH 2407MHz/2473MHz (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for (Peak and AV) as following:</p> <ol style="list-style-type: none"><li>1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (2407MHz). Then the field strength was measured at 2310-2390 MHz.</li><li>2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (2473MHz). Then the field strength was measured at 2483.5-2500 MHz.</li></ol>		



2407MHz/ Orthogonal Axes: X

Polarization: Horizontal

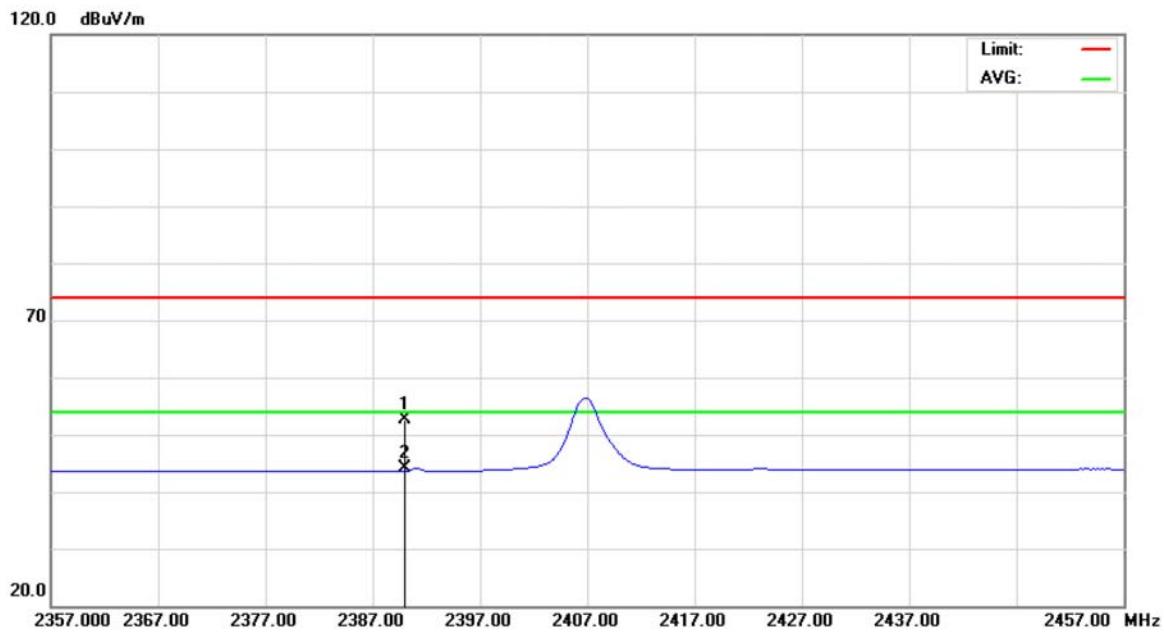


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	20.36	32.32	52.68	74.00	-21.32	peak	
2	*	2390.000	11.73	32.32	44.05	54.00	-9.95	AVG	



2473MHz/ Orthogonal Axes: X

Polarization: Horizontal

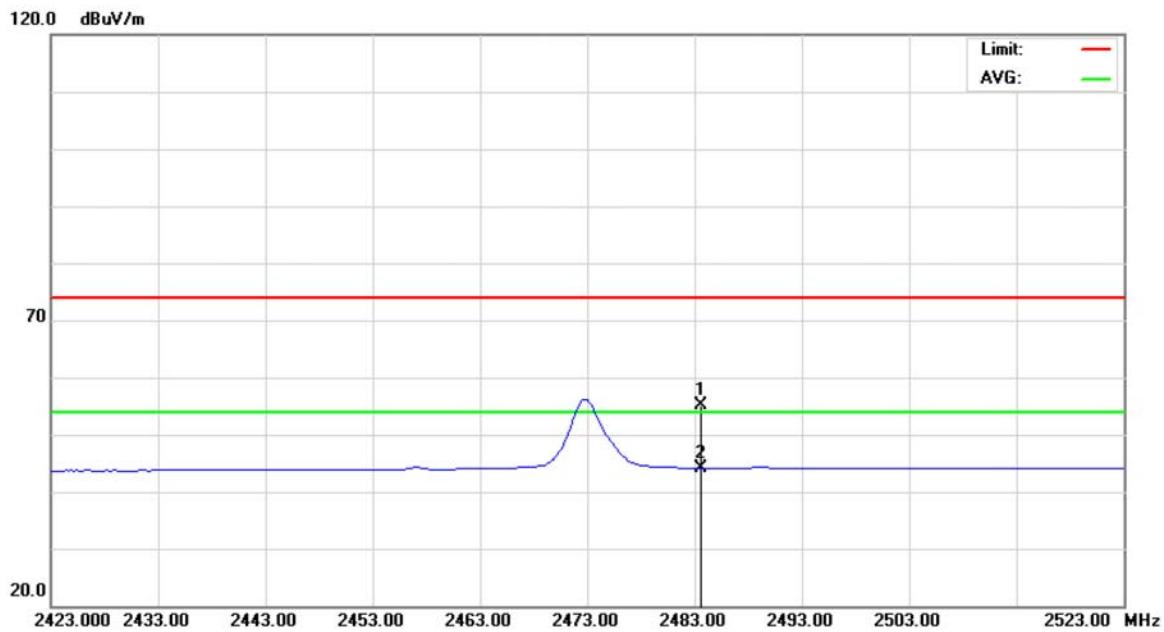

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	22.24	32.79	55.03	74.00	-18.97	peak	
2	*	2483.500	11.34	32.79	44.13	54.00	-9.87	AVG	



## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C: 2010			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 06, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

#### 5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

#### 5.1.3 DEVIATION FROM STANDARD

No deviation.

#### 5.1.4 TEST SETUP



#### 5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




## 5.1.6 TEST RESULTS

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26 °C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz/2437MHz/2473MHz		


Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
01	2407	0.56	1.43	>=500KHz
08	2437	0.57	1.47	>=500KHz
14	2473	0.56	1.43	>=500KHz

### 2407MHz

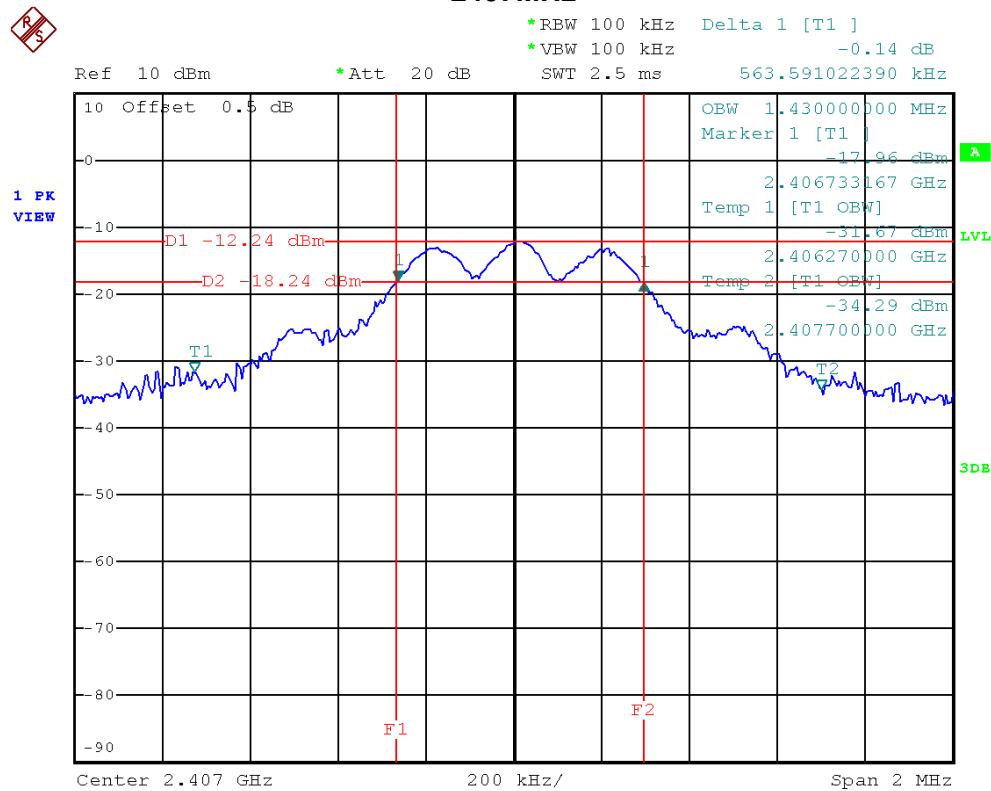




## 2437MHz

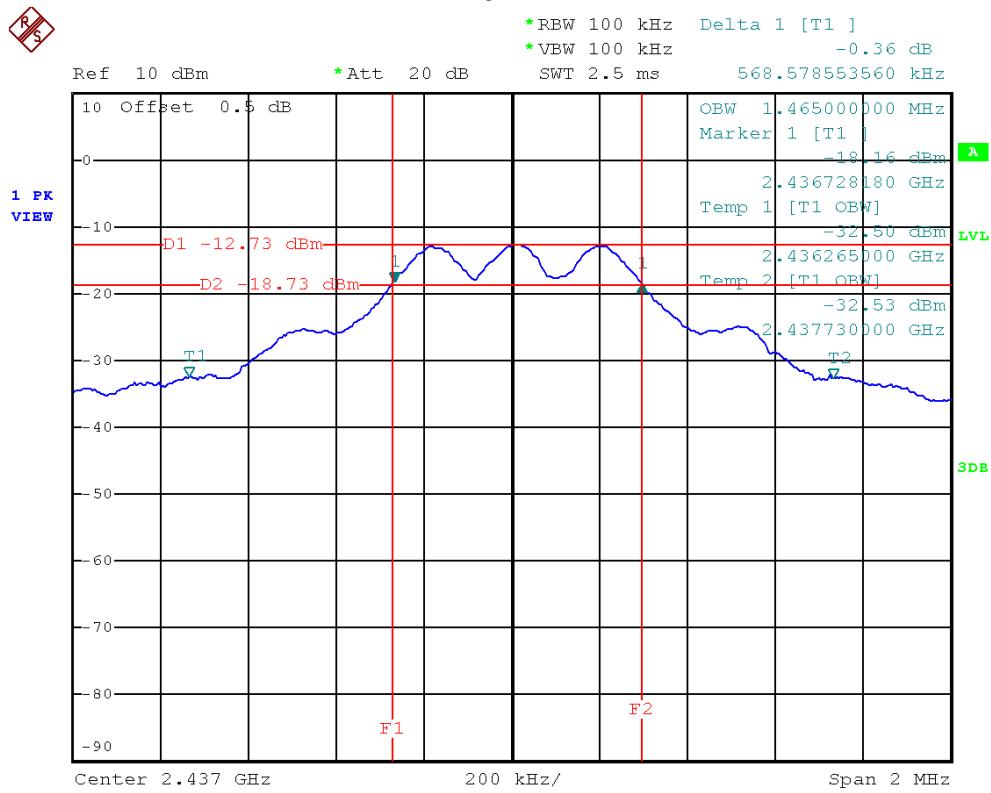

## 2473MHz

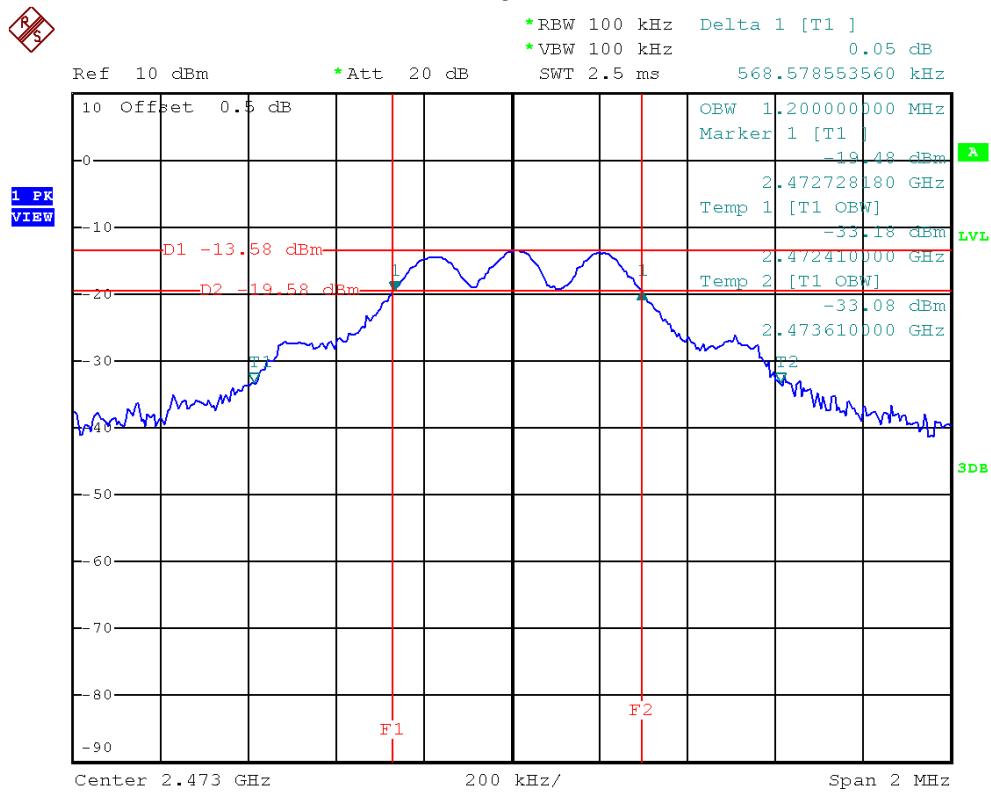



## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C: 2010			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Jul. 13, 2012
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Jul. 18, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

#### 6.1.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

#### 6.1.3 DEVIATION FROM STANDARD

No deviation.

#### 6.1.4 TEST SETUP



#### 6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



#### **6.1.6 TEST RESULTS**

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	26 °C	Relative Humidity :	60%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz/2437MHz/2473MHz		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
01	2407	-7.35	30	1
08	2437	-6.34	30	1
14	2473	-7.11	30	1



## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C: 2010			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

#### 7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 06, 2012

Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

#### 7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

#### 7.1.3 DEVIATION FROM STANDARD

No deviation.

#### 7.1.4 TEST SETUP



#### 7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 7.1.6 TEST RESULTS

EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	24 °C	Relative Humidity :	54%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz/2473MHz		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2391.25	-58.10	2489.00	-58.64
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			



## 2407MHz/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

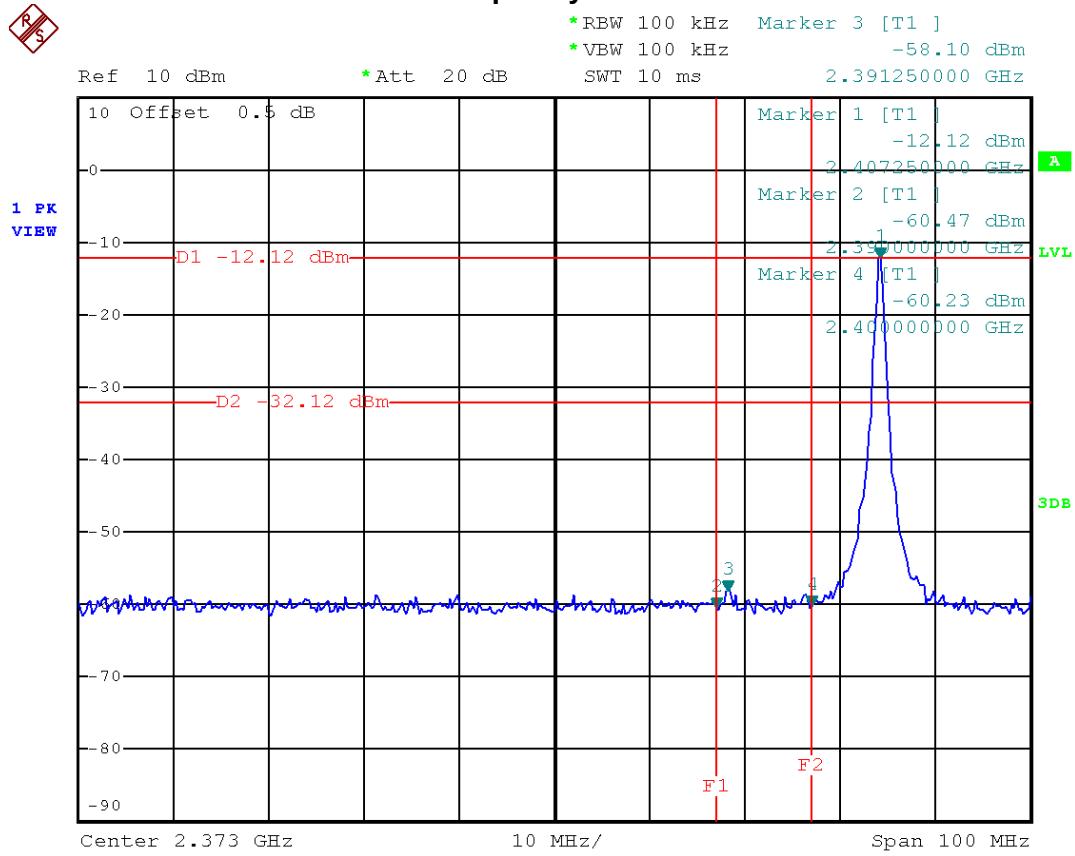


## 2473MHz/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

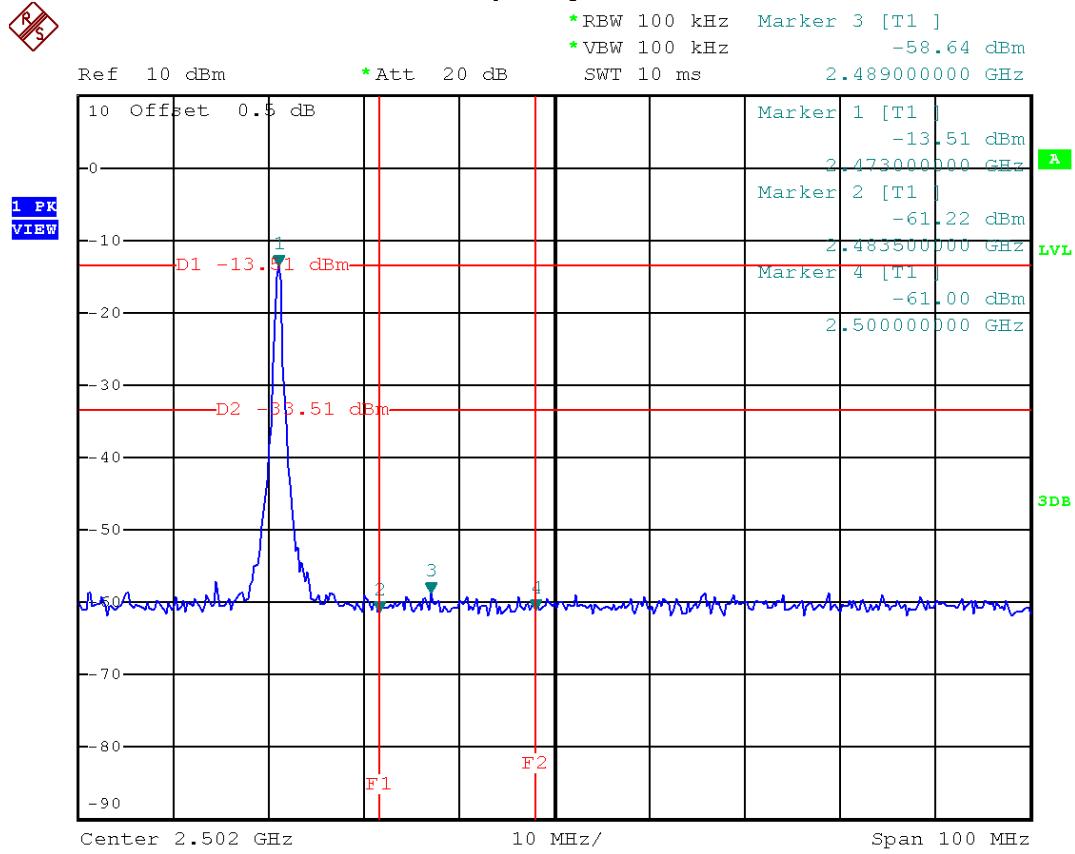




RS

## 2407MHz/10 Harmonic of the frequency

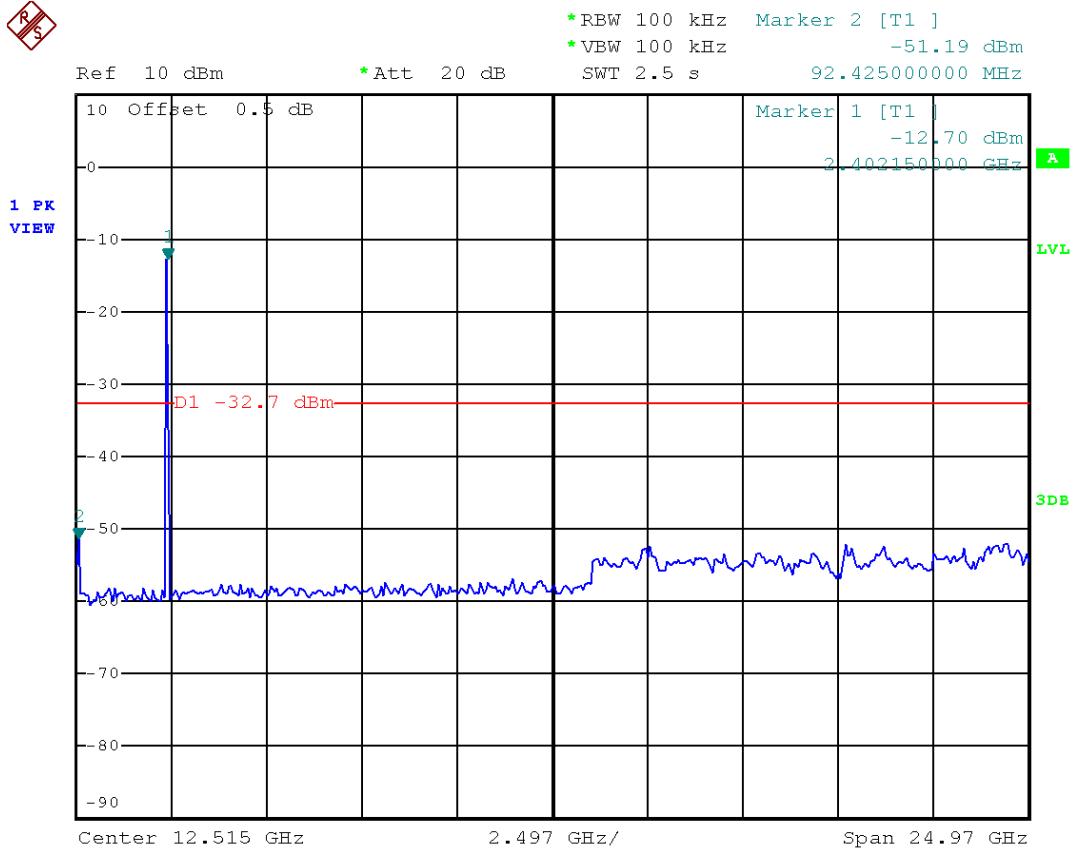

RS


## 2437MHz/10 Harmonic of the frequency

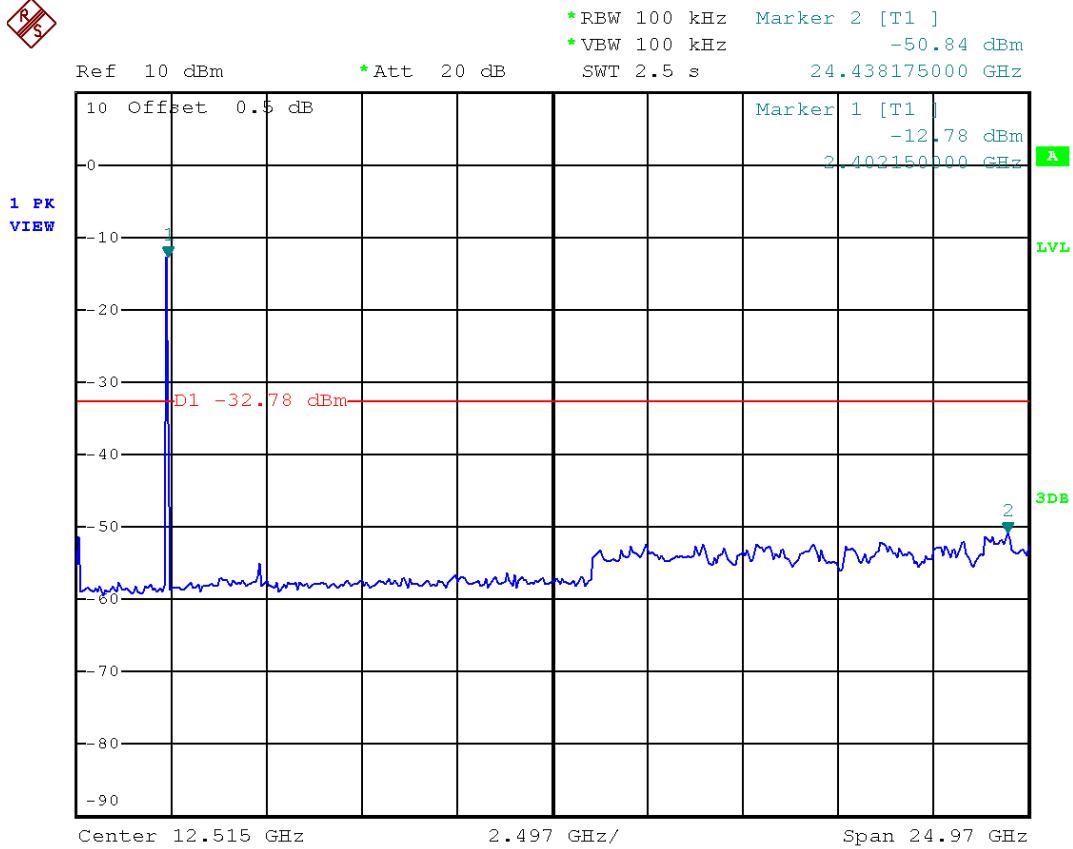



RS

## 2473MHz/10 Harmonic of the frequency

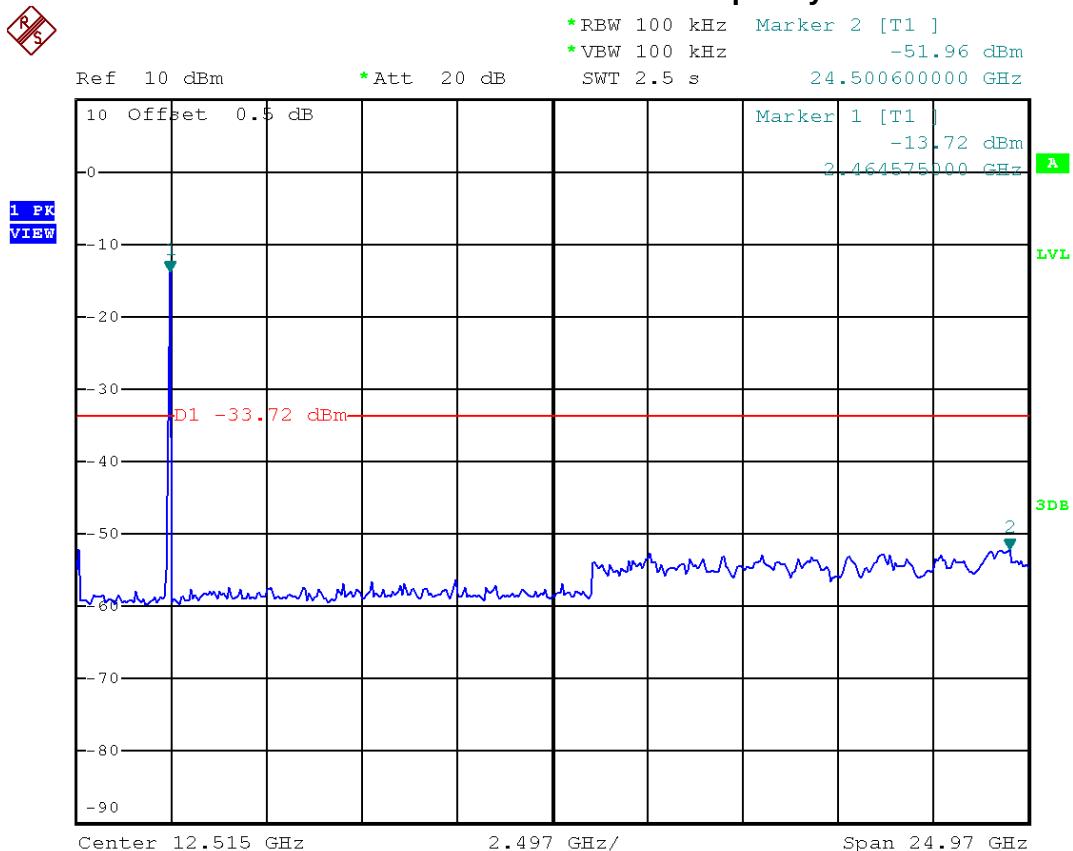



## 8. POWER SPECTRAL DENSITY TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C: 2010			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 06, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

#### 8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

#### 8.1.3 DEVIATION FROM STANDARD

No deviation.

#### 8.1.4 TEST SETUP



#### 8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 8.1.6 TEST RESULTS


EUT :	2.4G RF Mouse	Model Name :	G7-750D
Temperature :	24 °C	Relative Humidity :	54%
Test Voltage :	DC 1.5V		
Test Mode :	2407MHz/2437MHz/2473MHz		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
01	2407	-19.47	8
08	2437	-19.90	8
14	2473	-20.75	8

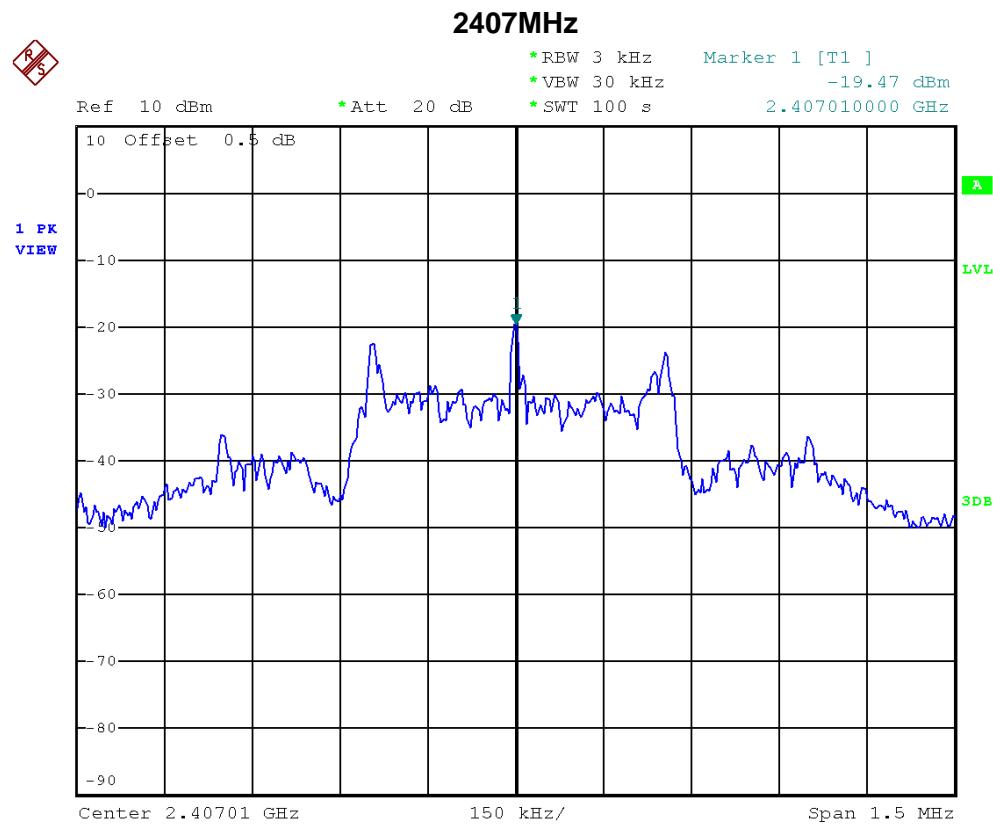




## 2437MHz

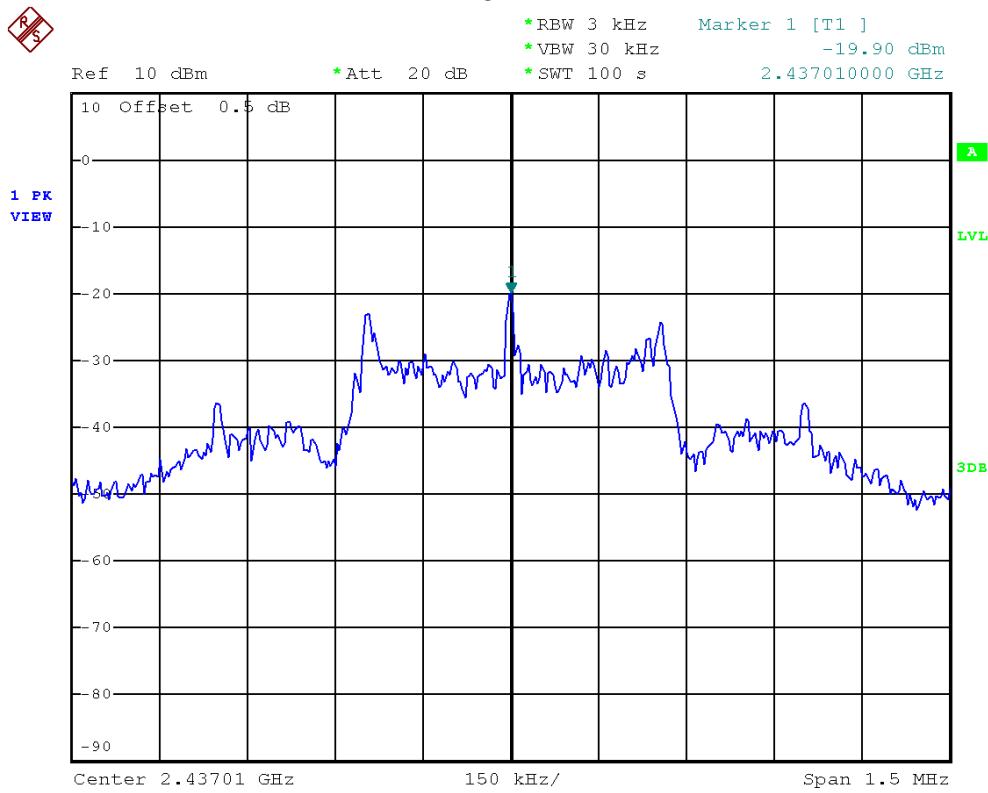

## 2473MHz

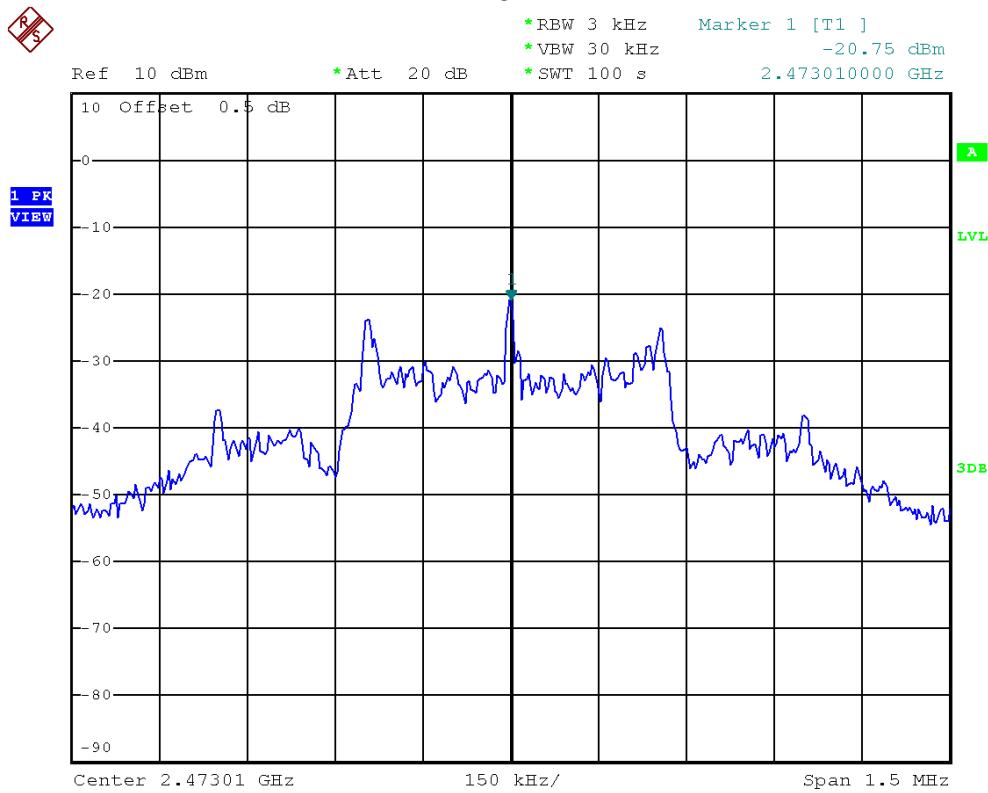



## 9. RF EXPOSURE TEST

### 9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure.

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Jul. 13, 2012
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Jul. 18, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

### 9.1.2 MPE CALCULATION METHOD & TEST RESULTS

The power is too low, so no RF calculations are needed.