



Radio Test Report

FCC ID: H8GR8A

This report concerns (check one) : Original Grant Class II Change

Issued Date : Oct. 02, 2013

Project No. : 1305197A

Equipment : 2.4G RF Gaming Mouse

Model Name : R8; R8-1; R8a; R8ma

Applicant : A-FOUR TECH CO., LTD.

Address : 6F., No.108, Min-Chuan Rd.,
Xindian Dist., New Taipei City,
Taiwan R.O.C.

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Sep. 04, 2013

Date of Test: Sep. 04, 2013 ~ Sep. 10, 2013

Testing Engineer: Josh Lin
(Josh Lin)

Technical Manager: Jeff Yang
(Jeff Yang)

Authorized Signatory: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	10
3 GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 DESCRIPTION OF TEST MODES	13
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.4 DESCRIPTION OF SUPPORT UNITS	15
4 CONDUCTED EMISSION	16
4.1 LIMIT	16
4.2 MEASUREMENT INSTRUMENTS LIST	16
4.3 TEST PROCEDURES	17
4.4 TEST SETUP LAYOUT	17
4.5 DEVIATION FROM TEST STANDARD	17
4.6 EUT OPERATING CONDITIONS	18
4.7 TEST RESULTS	19
5 ANTENNA CONDUCTED SPURIOUS EMISSION	21
5.1 LIMIT	21
5.2 MEASUREMENT INSTRUMENTS LIST	21
5.3 TEST PROCEDURES	21
5.4 TEST SETUP LAYOUT	21
5.5 DEVIATION FROM TEST STANDARD	21
5.6 EUT OPERATING CONDITIONS	21
5.7 TEST RESULTS	22
6 6 DB BANDWIDTH	26
6.1 LIMIT	26
6.2 MEASUREMENT INSTRUMENTS LIST	26
6.3 TEST PROCEDURES	26
6.4 TEST SETUP LAYOUT	26
6.5 DEVIATION FROM TEST STANDARD	26
6.6 EUT OPERATING CONDITIONS	26
6.7 TEST RESULTS	27
7 MAXIMUM PEAK CONDUCTED OUTPUT POWER	29
7.1 LIMIT	29
7.2 MEASUREMENT INSTRUMENTS LIST	29
7.3 TEST PROCEDURES	29



Table of Contents

7.4	TEST SETUP LAYOUT	29
7.5	DEVIATION FROM TEST STANDARD	29
7.6	EUT OPERATING CONDITIONS	29
7.7	TEST RESULTS	30
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	31
8.1	LIMIT	31
8.2	MEASUREMENT INSTRUMENTS LIST	32
8.3	MEASURING INSTRUMENTS SETTING	32
8.4	TEST PROCEDURES	33
8.5	DEVIATION FROM TEST STANDARD	33
8.6	TEST SETUP LAYOUT	33
8.7	EUT OPERATING CONDITIONS	34
8.8	TEST RESULTS	35
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	37
9.1	LIMIT	37
9.2	MEASUREMENT INSTRUMENTS LIST	38
9.3	MEASURING INSTRUMENTS SETTING	38
9.4	TEST PROCEDURES	39
9.5	DEVIATION FROM TEST STANDARD	39
9.6	TEST SETUP LAYOUT	39
9.7	EUT OPERATING CONDITIONS	40
9.8	TEST RESULTS	41
9.9	TEST RESULTS (RESTRICTED BANDS)	53
10	POWER SPECTRAL DENSITY	57
10.1	LIMIT	57
10.2	MEASUREMENT INSTRUMENTS LIST	57
10.3	TEST PROCEDURES	57
10.4	TEST SETUP LAYOUT	57
10.5	DEVIATION FROM TEST STANDARD	57
10.6	EUT OPERATING CONDITIONS	57
10.7	TEST RESULTS	58
11	RF EXPOSURE COMPLIANCE	60
11.1	LIMIT	60
11.2	MEASUREMENT INSTRUMENTS LIST	60
11.3	MPE CALCULATION METHOD	60
11.4	TEST SETUP LAYOUT	61
11.5	DEVIATION FROM TEST STANDARD	61
11.6	EUT OPERATING CONDITIONS	61



Table of Contents

11.7	TEST RESULTS	62
12	EUT TEST PHOTO	63



REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Oct. 02, 2013



1 CERTIFICATION

Equipment : 2.4G RF Gaming Mouse

Brand Name : bloodY;  ; A4TECH

Model Name : R8; R8-1; R8a; R8ma

Applicant : A-FOUR TECH CO., LTD.

Date of Test : Sep. 04, 2013 ~ Sep. 10, 2013

Standards : FCC Part 15, Subpart C: 2012

ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1305197A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

Standard Clause	Test Item	Result
15.207	Conducted Emission	PASS
15.247 (c)	Antenna conducted Spurious Emission	PASS
15.247 (a)(2)	6dB Bandwidth	PASS
15.247 (b)	Maximum Peak Conducted Output Power	PASS
15.247 (c)	Radiated Spurious Emission	PASS
15.247 (d)(e)	Power Spectral Density	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

- (1) N/A: denotes test is not applicable in this Test Report
- (2) Portable device; SAR report is required.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

CO2: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)



2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U, (dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
OS02	30 MHz ~ 200 MHz	V	2.48	
	30 MHz ~ 200 MHz	H	2.16	
	200 MHz ~ 1, 000 MHz	V	2.50	
	200 MHz ~ 1, 000 MHz	H	2.66	

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G RF Gaming Mouse														
Brand Name	bloodY;  ; A4TECH														
Model Name	R8; R8-1; R8a; R8ma														
OEM Brand/Model Name	N/A														
Model Difference	Models' differences between each other only the changes of model name which do not affect the EMI performance. Model R8 was used for final testing and collecting test data included in this report.														
Product Description	<p>The EUT is a 2.4G RF Gaming Mouse.</p> <table border="1"><tr><td>Operation Frequency</td><td>2403 MHz - 2473 MHz</td></tr><tr><td>Modulation Type</td><td>GFSK</td></tr><tr><td>Bit Rate of Transmitter</td><td>500 Kbps</td></tr><tr><td>Number Of Channel</td><td>Please refer to the Note 2.</td></tr><tr><td>Antenna Designation</td><td>Please refer to the Note 3.</td></tr><tr><td>Antenna Gain(Peak)</td><td>Please refer to the Note 3.</td></tr><tr><td>Maximum Peak Conducted Output Power:</td><td>1.69 dBm</td></tr></table> <p>More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency	2403 MHz - 2473 MHz	Modulation Type	GFSK	Bit Rate of Transmitter	500 Kbps	Number Of Channel	Please refer to the Note 2.	Antenna Designation	Please refer to the Note 3.	Antenna Gain(Peak)	Please refer to the Note 3.	Maximum Peak Conducted Output Power:	1.69 dBm
Operation Frequency	2403 MHz - 2473 MHz														
Modulation Type	GFSK														
Bit Rate of Transmitter	500 Kbps														
Number Of Channel	Please refer to the Note 2.														
Antenna Designation	Please refer to the Note 3.														
Antenna Gain(Peak)	Please refer to the Note 3.														
Maximum Peak Conducted Output Power:	1.69 dBm														
Power Source	1. Supplied from USB DC Source. 2. Battery supplied.														
Power Rating	1. I/P: DC 5V 2. I/P: DC 3.7V 600mAh														
Connecting I/O Port(s)	Please refer to the User's Manual														
Products Covered	1 * Lithium Battery: TE-PL602030-2P, 3.7V 600mAh 1 * USB Cable														
EUT Modification(s)	N/A														



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2407	24	2430	47	2453
02	2408	25	2431	48	2454
03	2409	26	2432	49	2455
04	2410	27	2433	50	2456
05	2411	28	2434	51	2457
06	2412	29	2435	52	2458
07	2413	30	2436	53	2459
08	2414	31	2437	54	2460
09	2415	32	2438	55	2461
10	2416	33	2439	56	2462
11	2417	34	2440	57	2463
12	2418	35	2441	58	2464
13	2419	36	2442	59	2465
14	2420	37	2443	60	2466
15	2421	38	2444	61	2467
16	2422	39	2445	62	2468
17	2423	40	2446	63	2469
18	2424	41	2447	64	2470
19	2425	42	2448	65	2471
20	2426	43	2449	66	2472
21	2427	44	2450	67	2473
22	2428	45	2451		
23	2429	46	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-1.20



3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel	Note
Conducted Emission	GFSK	500 Kbps	2437 MHz	
Antenna conducted Spurious Emission	GFSK	500 Kbps	2407 MHz / 2437 MHz / 2473 MHz	
6 dB Bandwidth	GFSK	500 Kbps	2407 MHz / 2437 MHz / 2473 MHz	
Maximum Peak Conducted Output Power	GFSK	500 Kbps	2407 MHz / 2437 MHz / 2473 MHz	
Radiated Spurious Emission (30 MHz to 1 GHz)	GFSK	500 Kbps	2437 MHz	
Radiated Spurious Emission (above 1 GHz)	GFSK	500 Kbps	2407 MHz / 2437 MHz / 2473 MHz	
Restricted Bands	GFSK	500 Kbps	2407 MHz / 2437 MHz / 2473 MHz	
Antenna Requirement	-----	-----	-----	
RF Exposure Compliance	-----	-----	-----	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

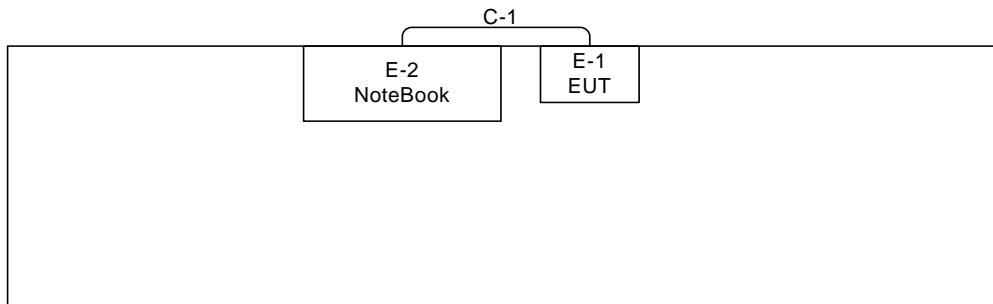

C-1 USB Cable



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	2.4G RF Gaming Mouse	bloodY;  ; A4TECH	R8	H8GR8A	N/A	EUT
E-2	Notebook PC	DELL	D620	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.2M	

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 CONDUCTED EMISSION

4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

NOTE:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	Schwarzbeck	NSLK 8127	8127685	Jun. 03, 2014
2	Test Cable	TIMES	CFD300-NL	130	Jun. 13, 2014
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Feb. 24, 2014
4	TRANSIENT LIMITER	EM	EM-7600	772	Aug. 21, 2014
5	Measurement Software	EZ	EZ_EMCA (Version NB-03A)	N/A	N/A

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.


4.3 TEST PROCEDURES

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

- a. Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- b. All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

4.4 TEST SETUP LAYOUT

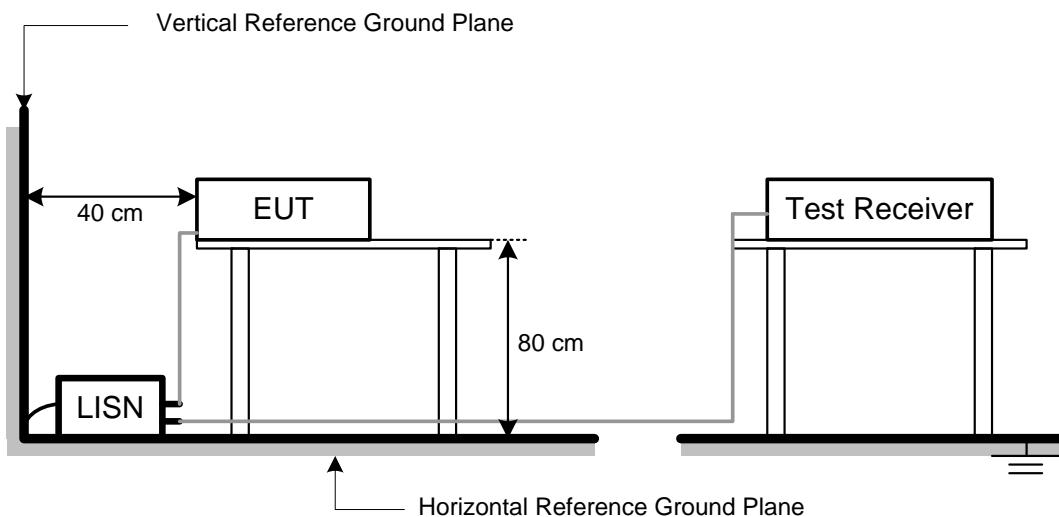

4.5 DEVIATION FROM TEST STANDARD

No deviation




4.6 EUT OPERATING CONDITIONS

The EUT used during radiated and/or conducted emission measurement was designed to exercise in a manner similar to a typical use.



4.7 TEST RESULTS


EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

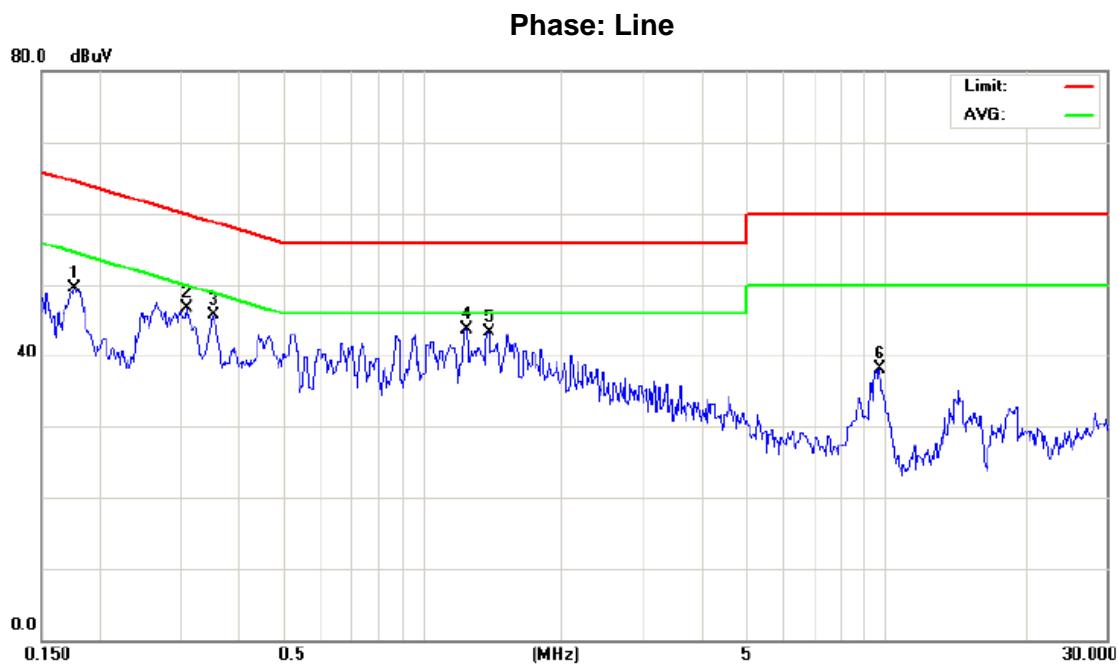

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
		dBuV	dB	dBuV	dB	Detector	
1	0.1765	40.30	9.11	49.41	64.65	-15.24	peak
2	0.3081	38.90	7.83	46.73	60.02	-13.29	peak
3	0.3536	37.81	7.80	45.61	58.88	-13.27	peak
4 *	1.2379	34.07	9.61	43.68	56.00	-12.32	peak
5	1.3819	33.70	9.55	43.25	56.00	-12.75	peak
6	9.7000	28.73	9.35	38.08	60.00	-21.92	peak



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

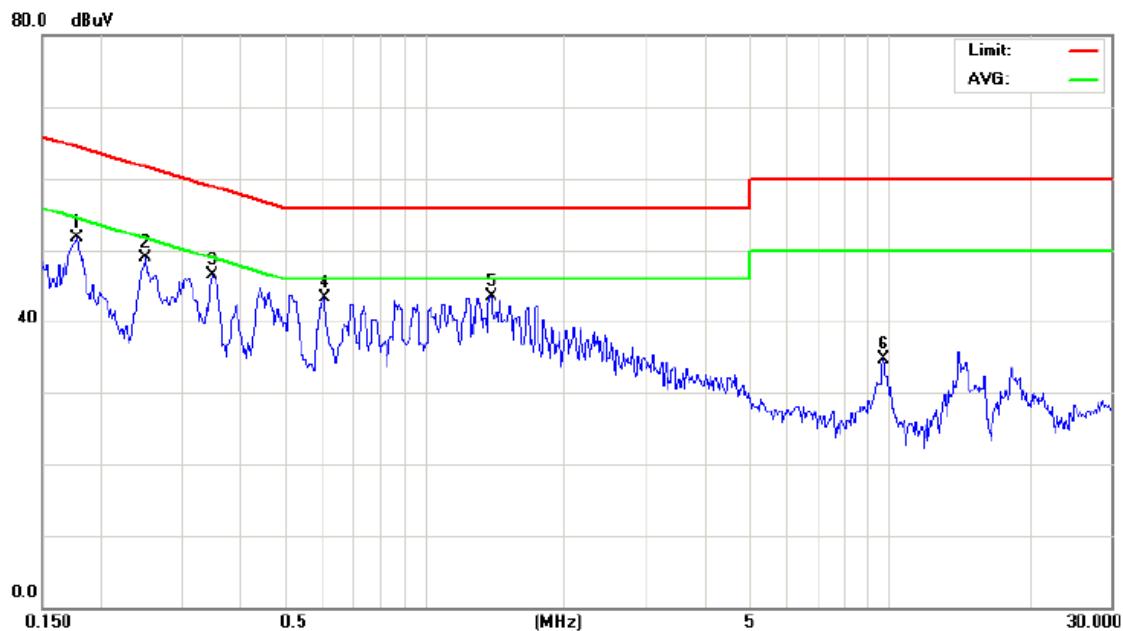Phase: Neutral

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over Detector	Comment
1		0.1779	42.01	9.70	51.71	64.58	-12.87	peak
2		0.2507	39.74	9.15	48.89	61.73	-12.84	peak
3	*	0.3472	38.77	7.80	46.57	59.03	-12.46	peak
4		0.6080	34.57	8.77	43.34	56.00	-12.66	peak
5		1.3819	33.89	9.55	43.44	56.00	-12.56	peak
6		9.7000	25.34	9.36	34.70	60.00	-25.30	peak



5 ANTENNA CONDUCTED SPURIOUS EMISSION

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

5.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT

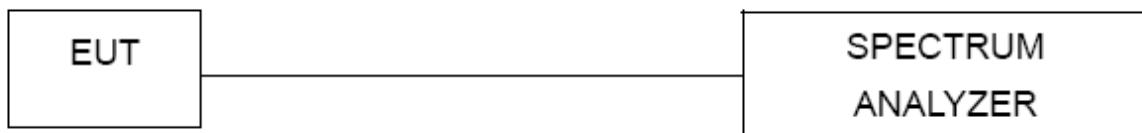

5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.7 TEST RESULTS**

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz/2473 MHz		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2391.00	-43.12	2489.00	-44.96
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			



The max. radio frequency power in any 100kHz bandwidth outside the frequency band

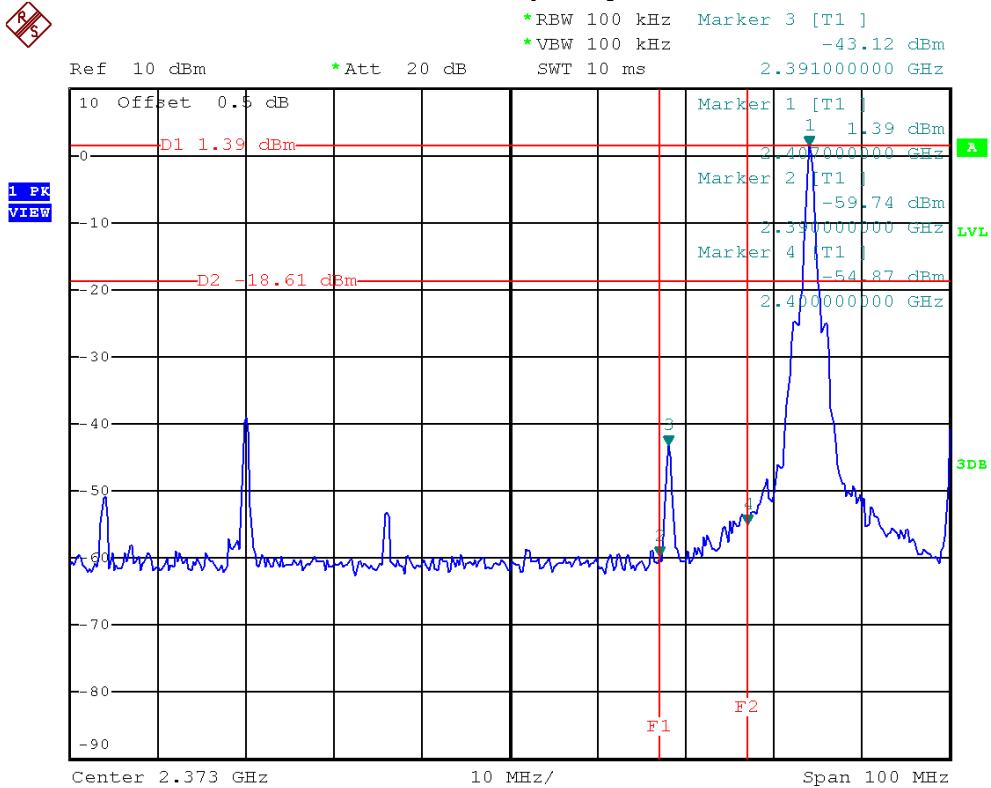


The max. radio frequency power in any 100 kHz bandwidth within the frequency band

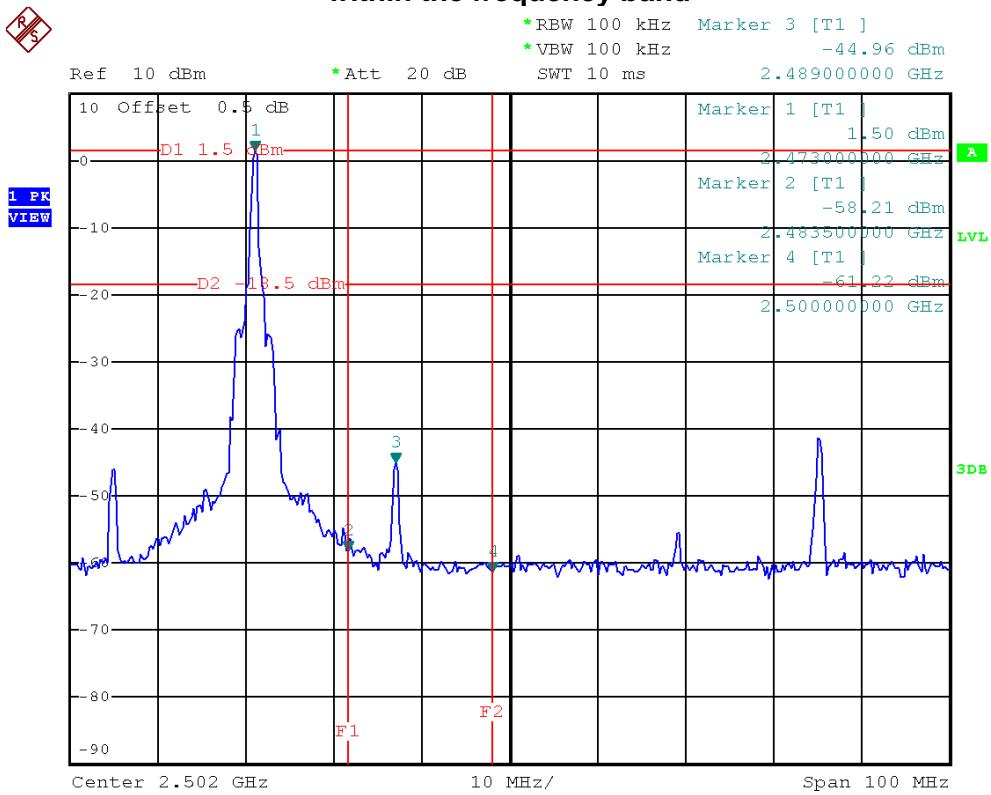




2403 MHz/10 Harmonic of the frequency

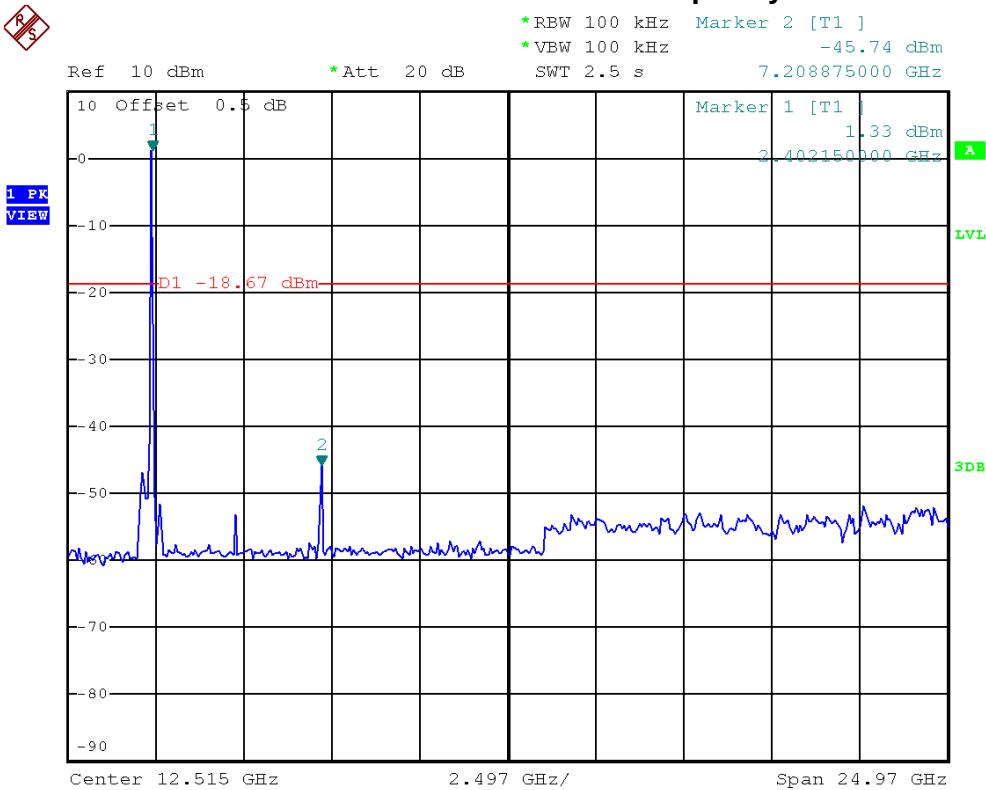


2437 MHz/10 Harmonic of the frequency

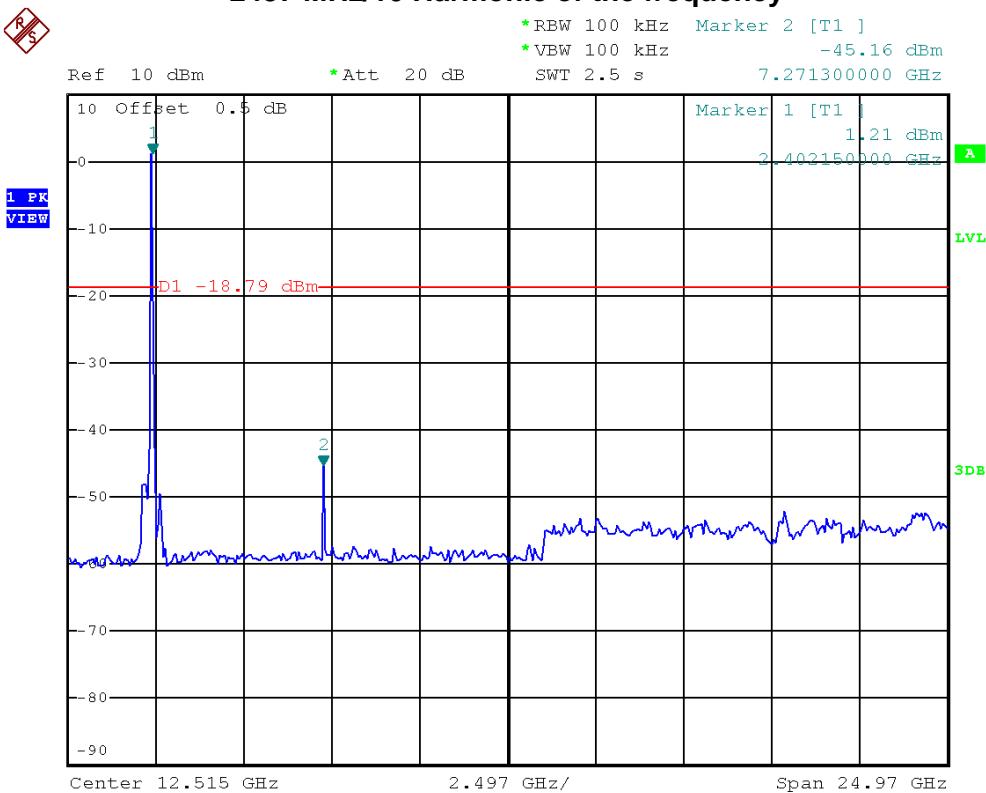



2473 MHz/10 Harmonic of the frequency

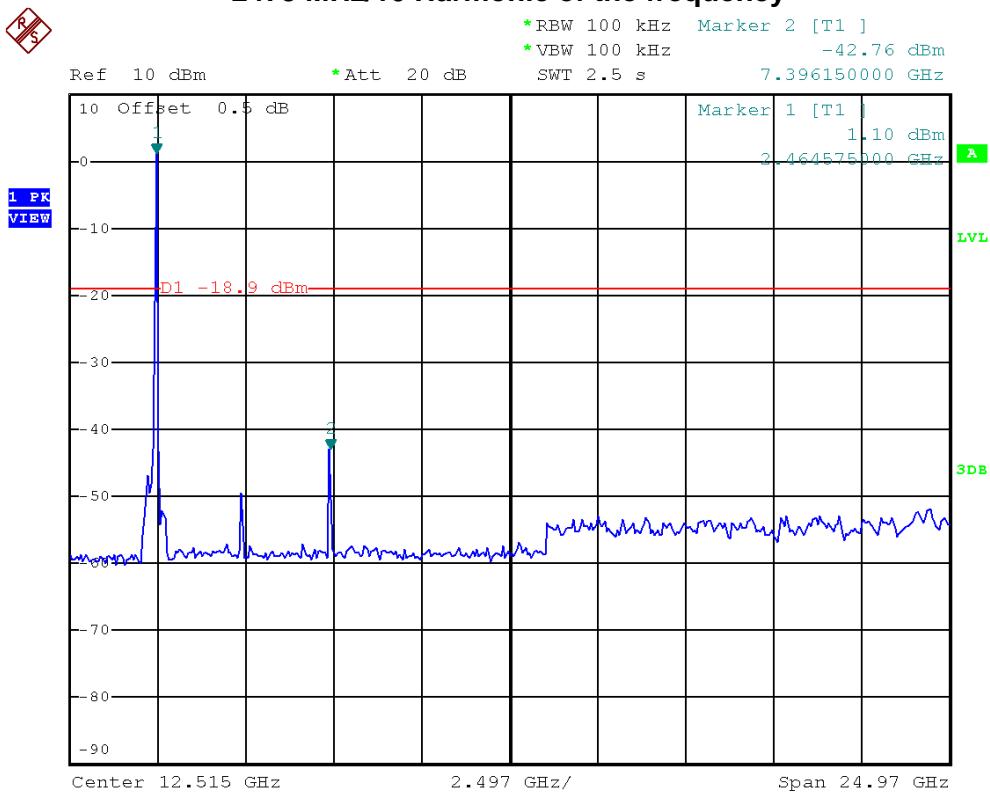



6 6 DB BANDWIDTH

6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Bandwidth	2400-2483.5	>= 500KHz (6 dB bandwidth)

6.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

6.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

6.4 TEST SETUP LAYOUT

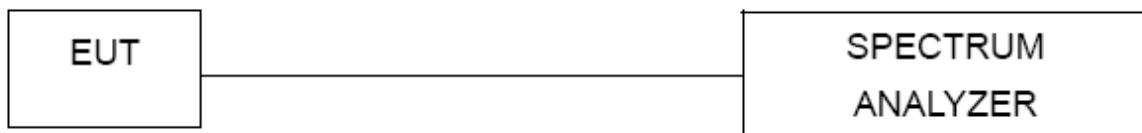

6.5 DEVIATION FROM TEST STANDARD

No deviation

6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.7 TEST RESULTS

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz, 2437 MHz, 2473 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2407 MHz	0.56	1.52	>=500 kHz	PASS
2437 MHz	0.56	1.43	>=500 kHz	PASS
2473 MHz	0.57	1.31	>=500 kHz	PASS

2403 MHz/6 dB and 99% Occupied Bandwidth

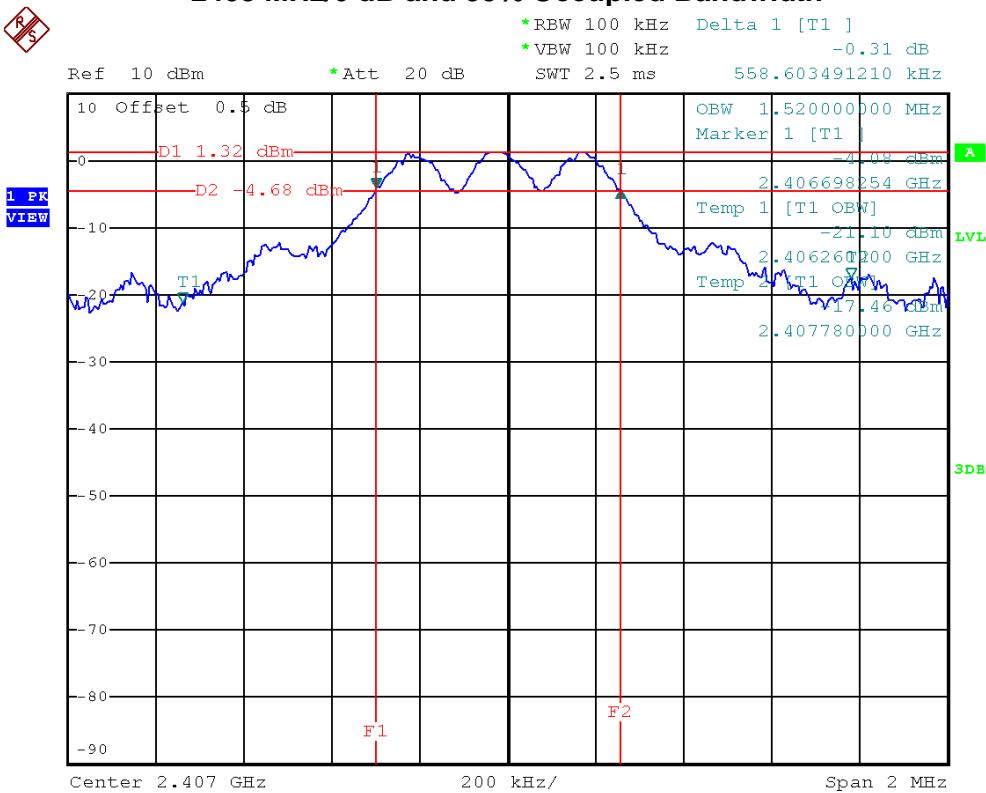




2437 MHz/6 dB and 99% Occupied Bandwidth

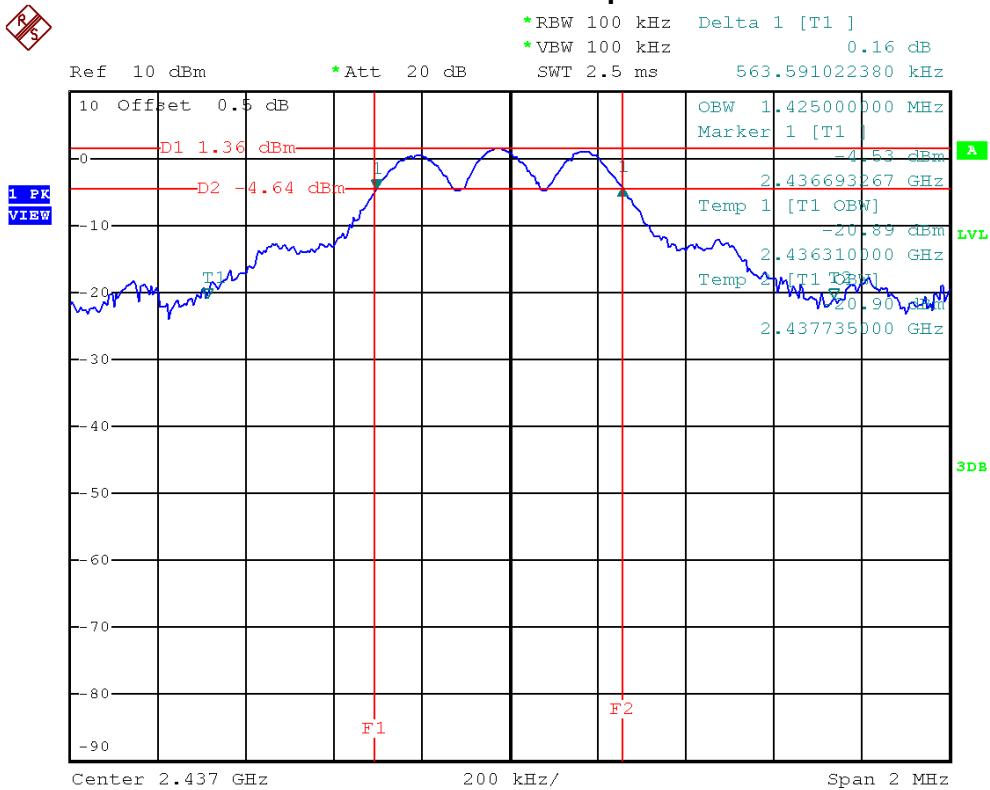

2473 MHz/6 dB and 99% Occupied Bandwidth

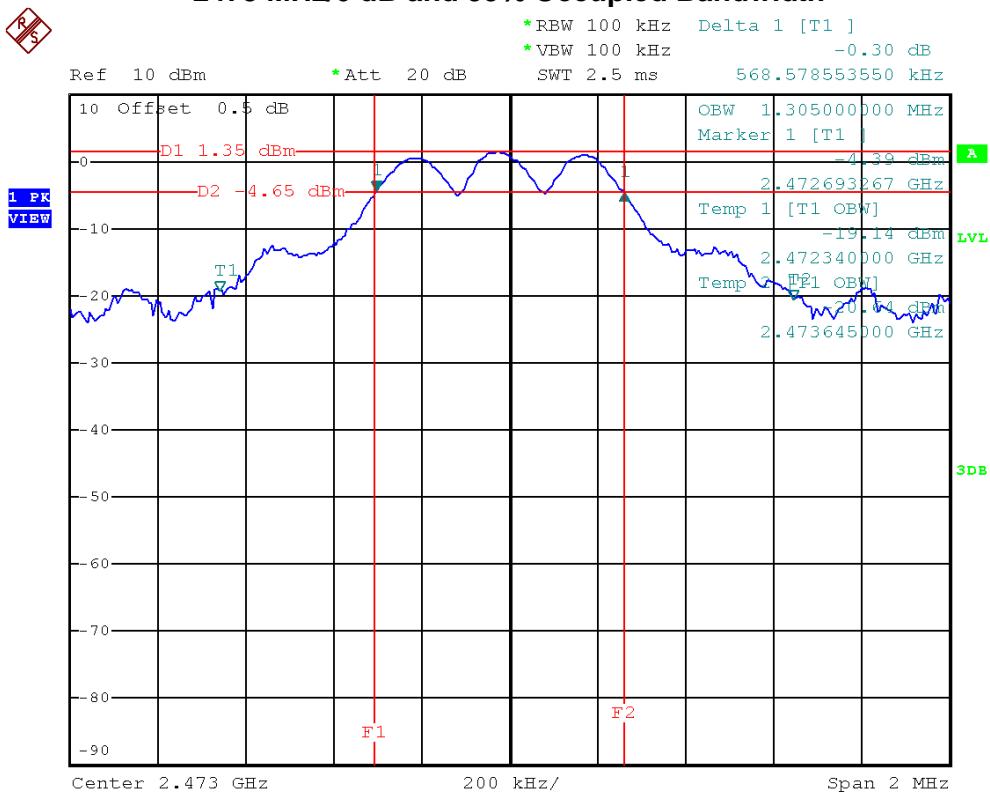



7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

7.3 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

7.4 TEST SETUP LAYOUT



7.5 DEVIATION FROM TEST STANDARD

No deviation

7.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



7.7 TEST RESULTS

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz, 2437 MHz, 2473 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2407 MHz	1.66	30	PASS
2437 MHz	1.69	30	PASS
2473 MHz	1.65	30	PASS

**8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)****8.1 LIMIT**

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

1. The limit for radiated test was performed according to FCC PART 15B.

2. The tighter limit applies at the band edges.

3. Emission level (dBuV/m)=20log Emission level (uV/m).

4. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value



8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 18, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

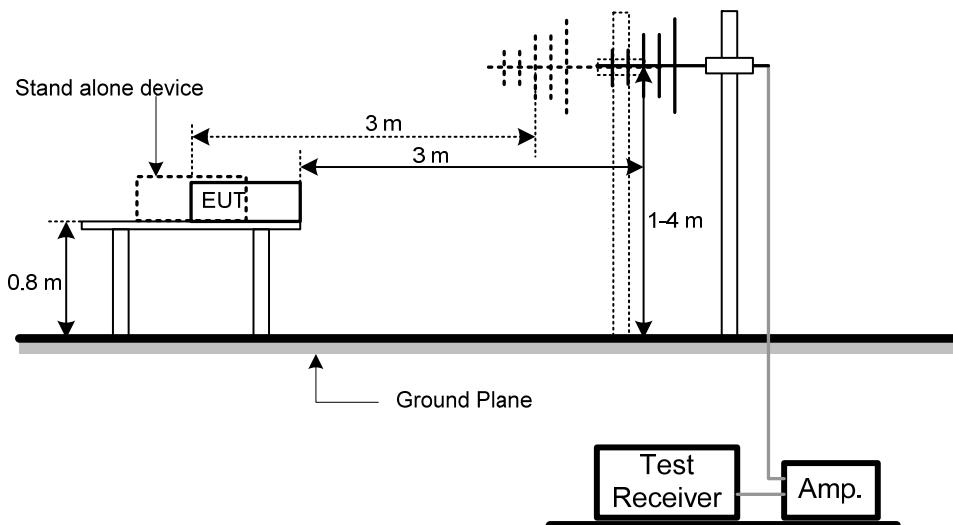



8.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

Polarization: Vertical

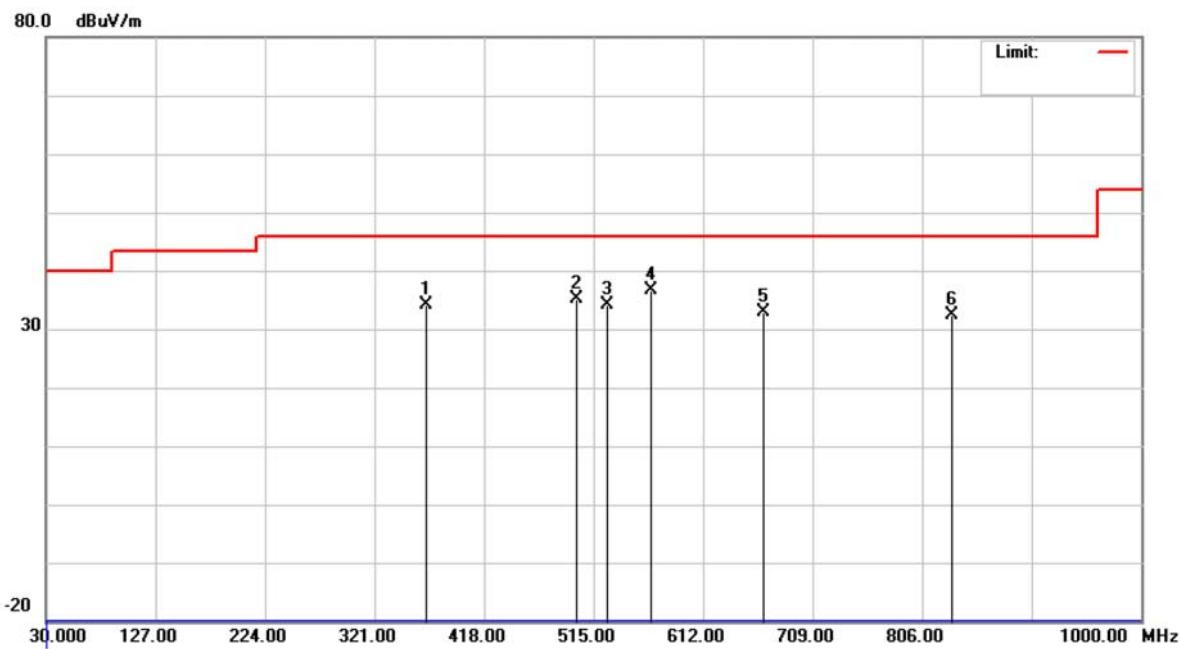


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	367.0750	46.38	-12.20	34.18	46.00	-11.82	peak
2	500.4500	44.73	-9.48	35.25	46.00	-10.75	peak
3	527.1250	42.95	-8.80	34.15	46.00	-11.85	peak
4 *	565.9250	44.38	-7.76	36.62	46.00	-9.38	peak
5	665.3500	39.74	-6.76	32.98	46.00	-13.02	peak
6	832.6750	36.62	-4.31	32.31	46.00	-13.69	peak



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

Polarization: Horizontal

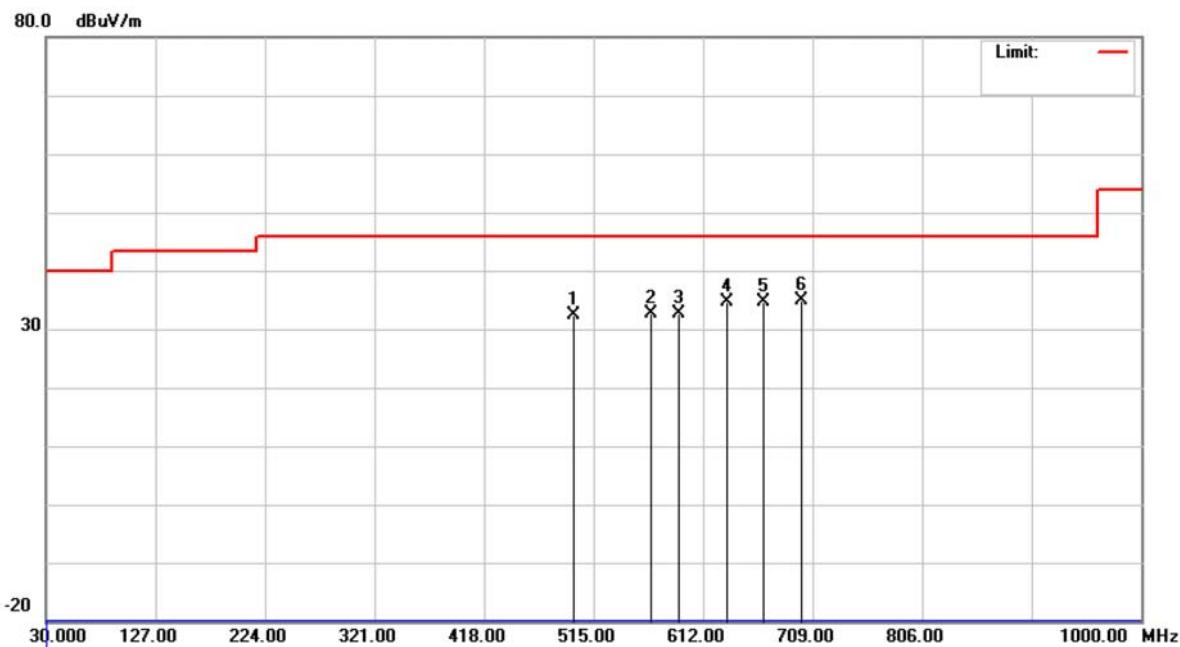

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over		
						Detector	Comment	
1	498.0250	41.95	-9.50	32.45	46.00	-13.55	peak	
2	565.9250	40.45	-7.76	32.69	46.00	-13.31	peak	
3	590.1750	39.61	-7.05	32.56	46.00	-13.44	peak	
4	633.8250	41.54	-6.85	34.69	46.00	-11.31	peak	
5	665.3500	41.49	-6.76	34.73	46.00	-11.27	peak	
6 *	699.3000	41.34	-6.48	34.86	46.00	-11.14	peak	

**9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)****9.1 LIMIT**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

(1) The limit for radiated test was performed according to FCC PART 15B.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value



9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 18, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

9.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AVG means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 TEST SETUP LAYOUT

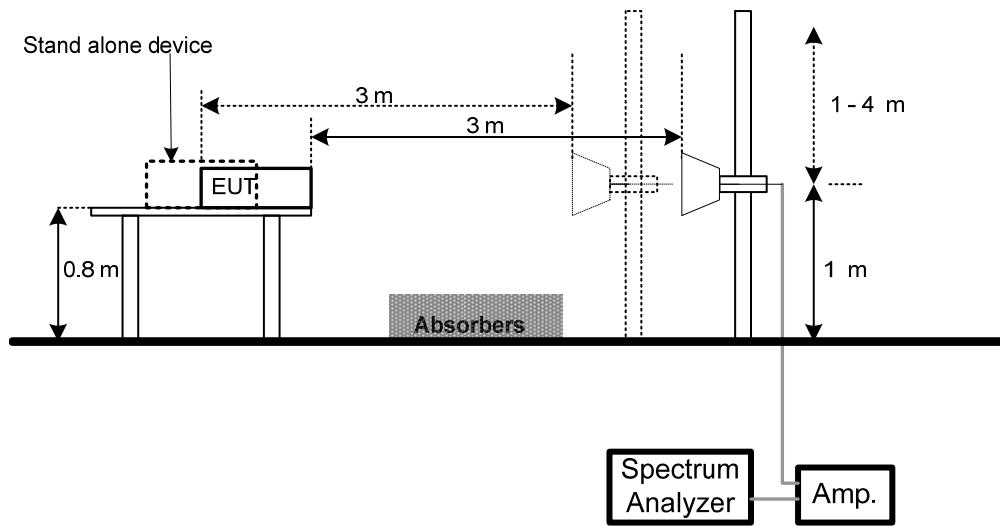




9.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.8 TEST RESULTS


EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		

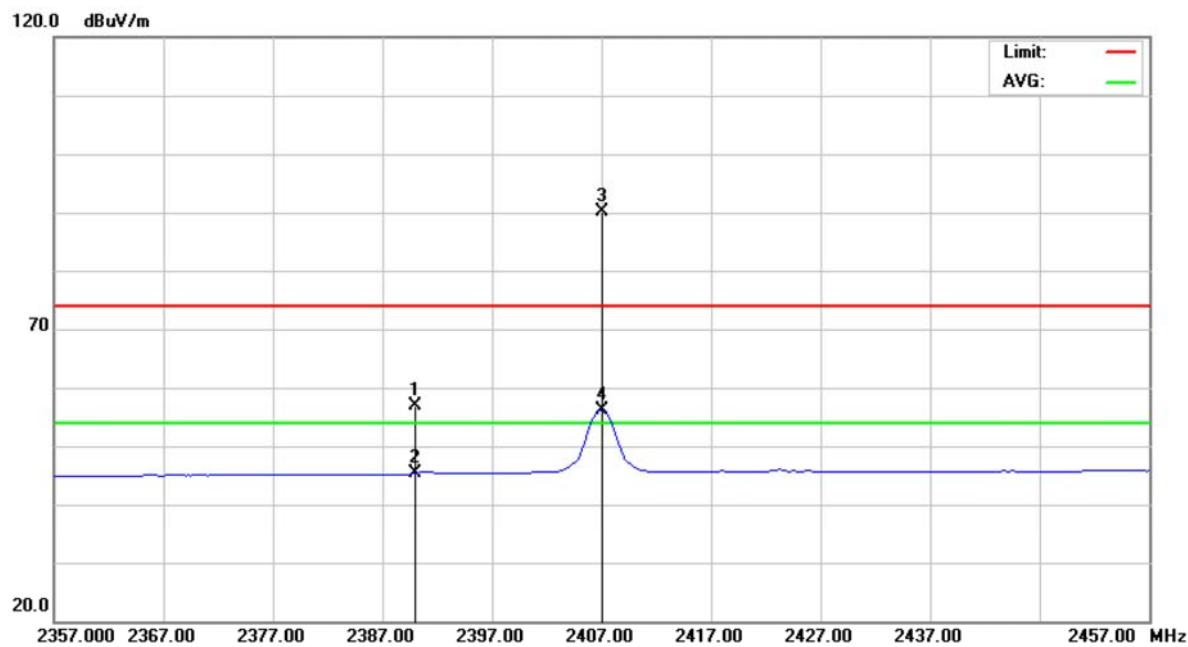Polarization: Vertical

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	2390.000	29.78	27.03	56.81	74.00	-17.19	peak
2	2390.000	18.33	27.03	45.36	54.00	-8.64	AVG
3 *	2407.000	63.04	27.08	90.12	74.00	16.12	peak
4 X	2407.000	29.06	27.08	56.14	54.00	2.14	AVG




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		

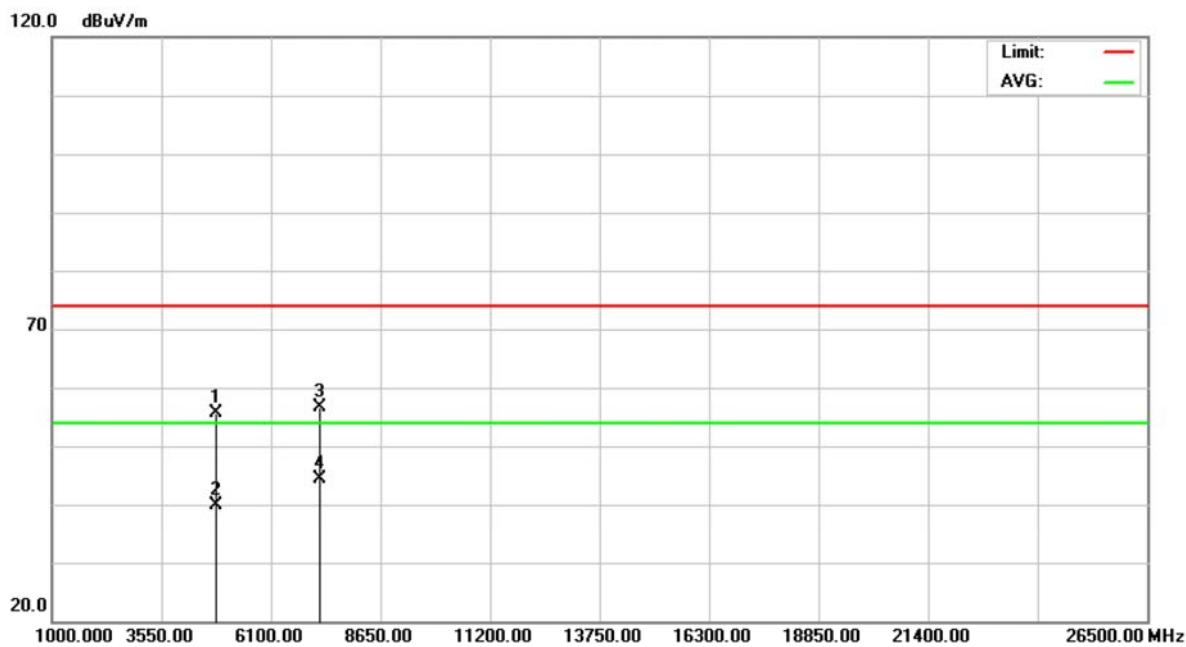Polarization: Vertical

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4813.900	56.52	-0.88	55.64	74.00	-18.36	peak
2	4813.900	40.66	-0.88	39.78	54.00	-14.22	AVG
3	7221.075	52.44	4.25	56.69	74.00	-17.31	peak
4 *	7221.075	40.11	4.25	44.36	54.00	-9.64	AVG




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		

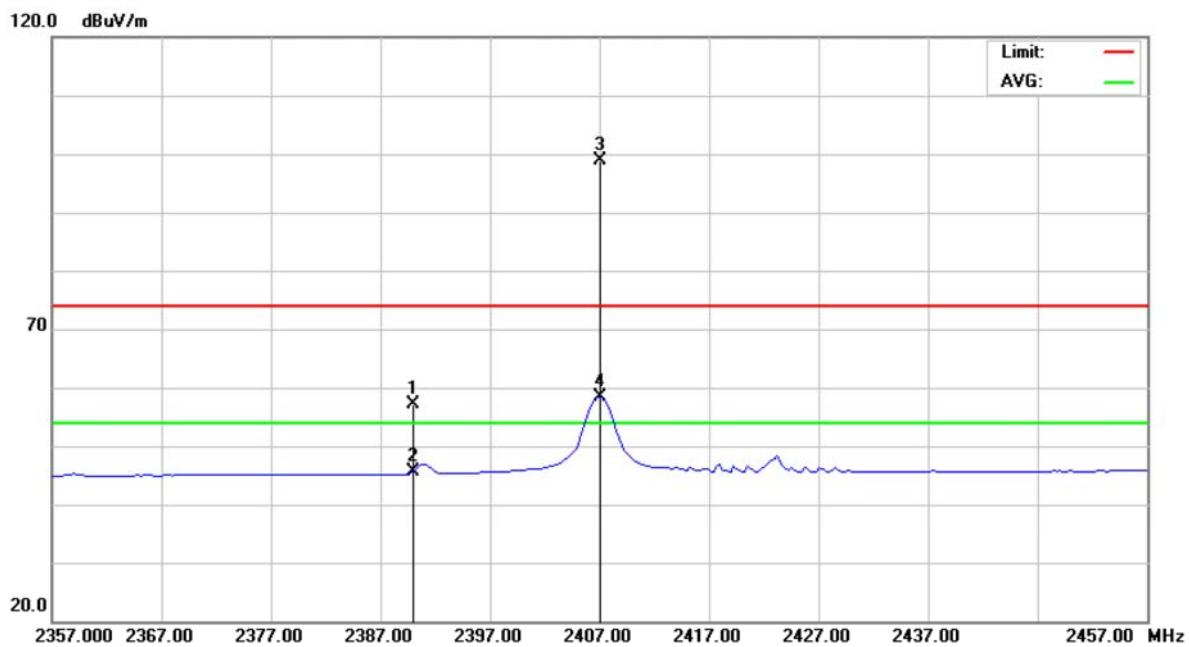Polarization: Horizontal

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over		Comment
						Detector		
1	2390.000	30.00	27.03	57.03	74.00	-16.97		peak
2	2390.000	18.67	27.03	45.70	54.00	-8.30		AVG
3 *	2407.000	71.71	27.08	98.79	74.00	24.79		peak
4 X	2407.000	31.32	27.08	58.40	54.00	4.40		AVG




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		

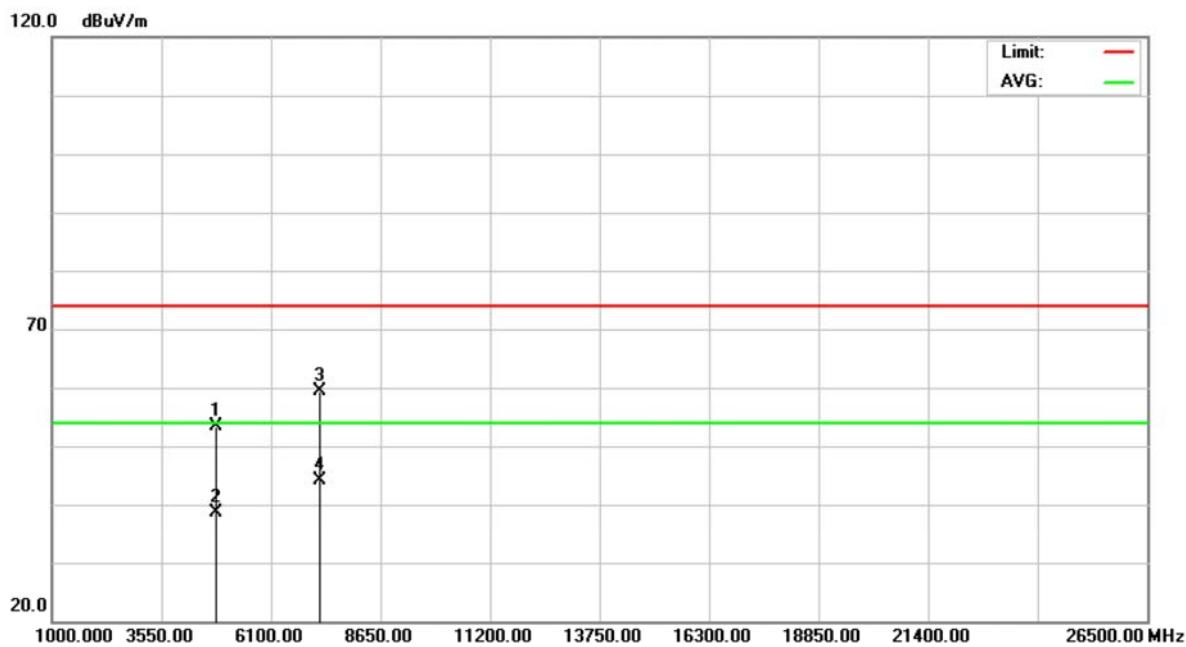Polarization: Horizontal

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4813.938	54.29	-0.88	53.41	74.00	-20.59	peak
2	4813.938	39.40	-0.88	38.52	54.00	-15.48	AVG
3	7220.737	55.07	4.25	59.32	74.00	-14.68	peak
4 *	7220.737	39.80	4.25	44.05	54.00	-9.95	AVG



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

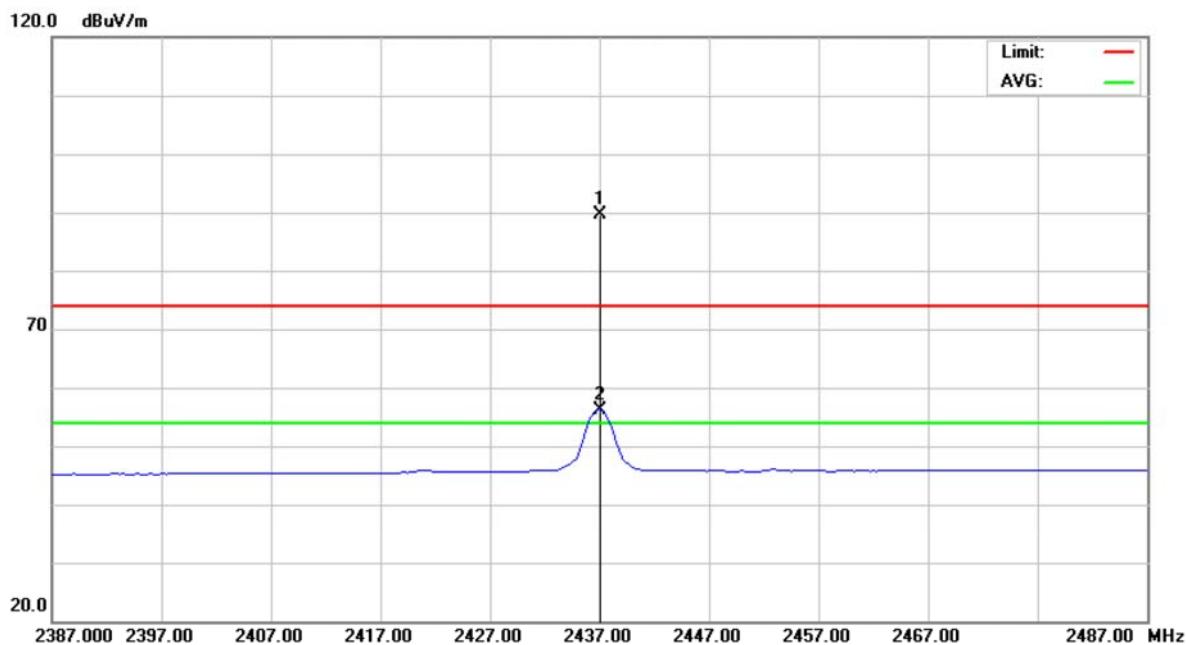
Polarization: Vertical

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1 *	2437.000	62.56	27.19	89.75	74.00	15.75	peak
2 X	2437.000	29.06	27.19	56.25	54.00	2.25	AVG



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		


Polarization: Vertical

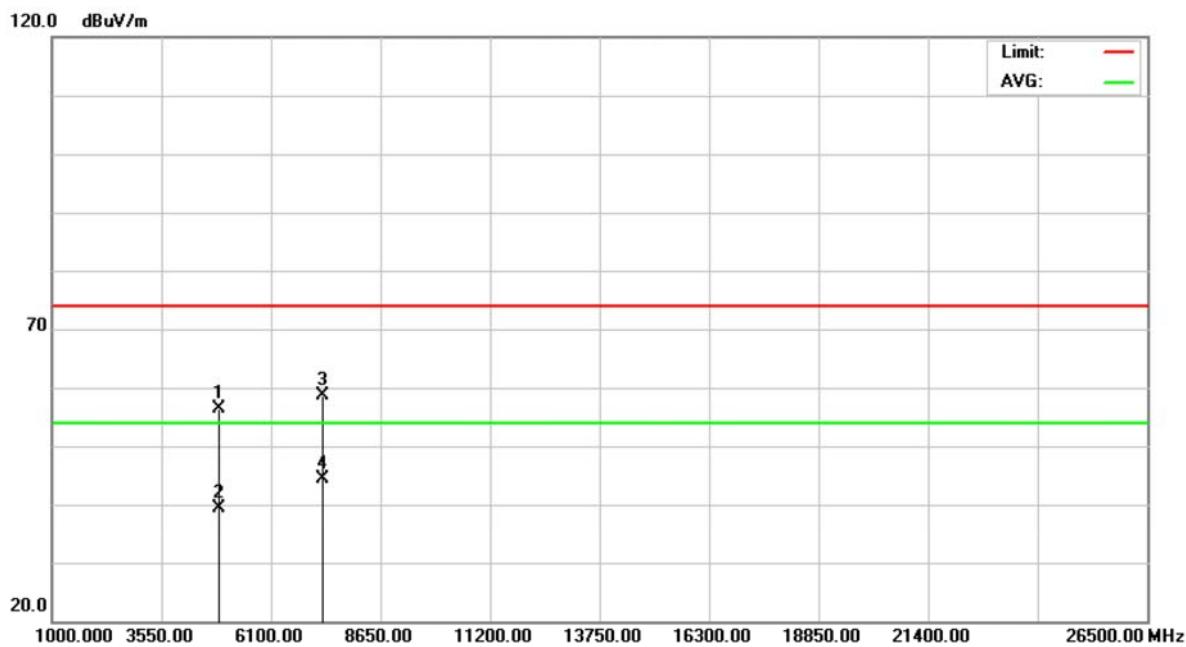

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4873.925	57.28	-0.82	56.46	74.00	-17.54	peak
2	4873.925	40.13	-0.82	39.31	54.00	-14.69	AVG
3	7310.975	53.95	4.56	58.51	74.00	-15.49	peak
4 *	7310.975	39.85	4.56	44.41	54.00	-9.59	AVG




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

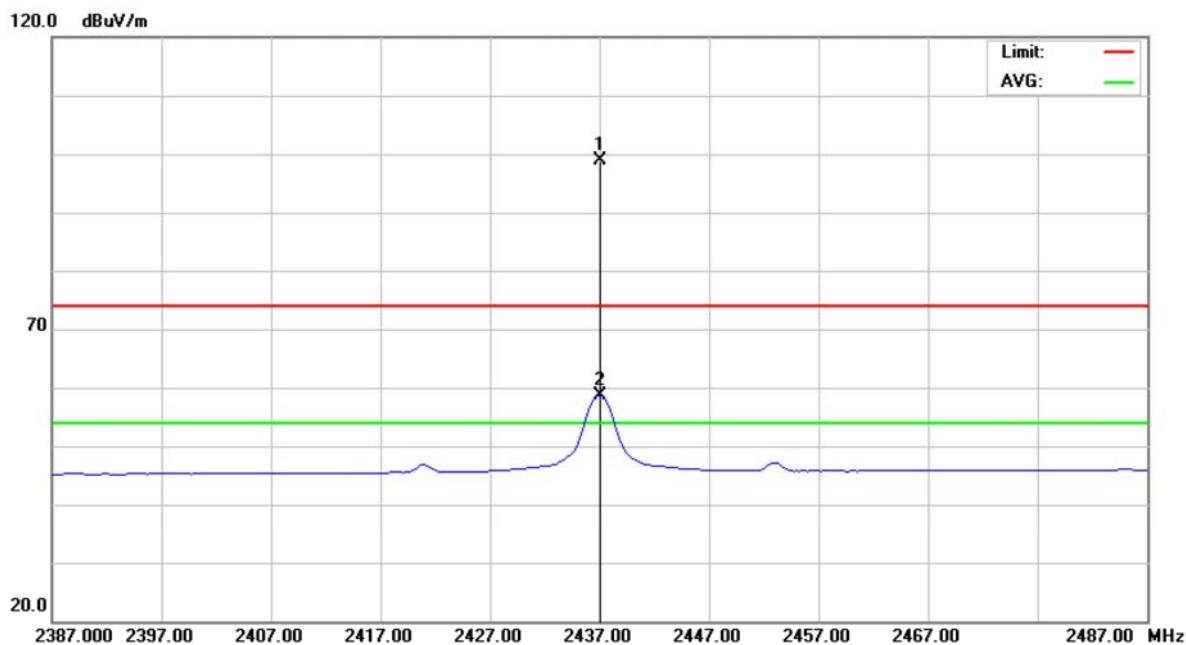Polarization: Horizontal

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1 *	2437.000	71.81	27.19	99.00	74.00	25.00	peak
2 X	2437.000	31.51	27.19	58.70	54.00	4.70	AVG




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

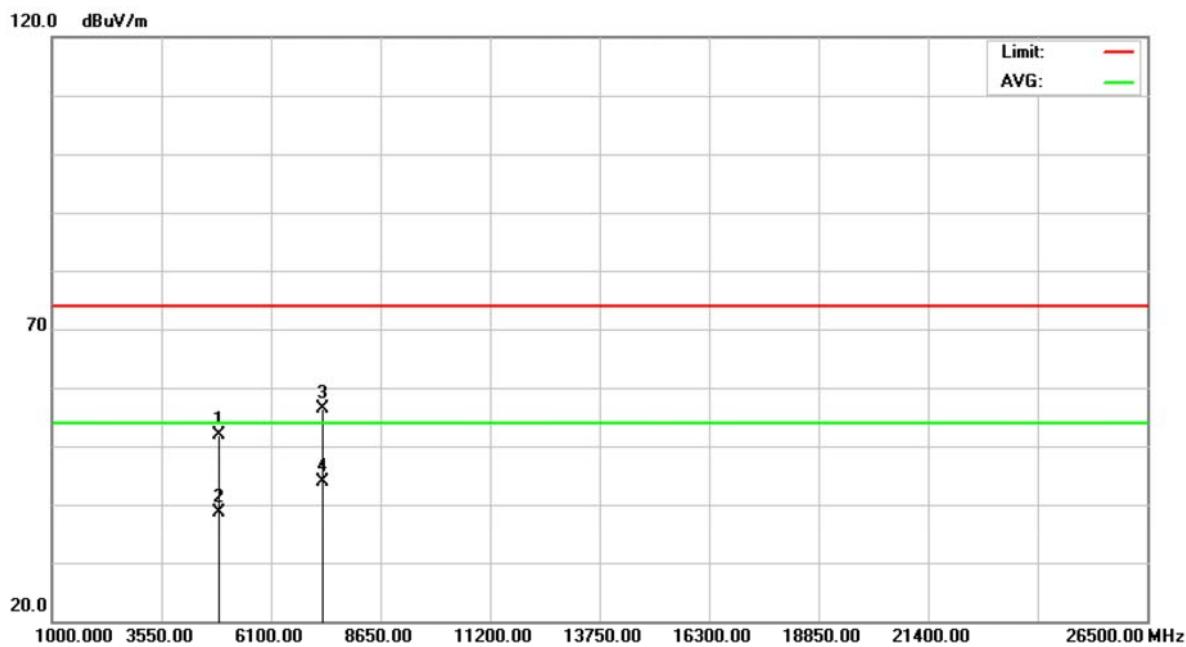Polarization: Horizontal

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4873.913	52.82	-0.82	52.00	74.00	-22.00	peak
2	4873.913	39.50	-0.82	38.68	54.00	-15.32	AVG
3	7310.925	51.92	4.55	56.47	74.00	-17.53	peak
4 *	7310.925	39.38	4.55	43.93	54.00	-10.07	AVG



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

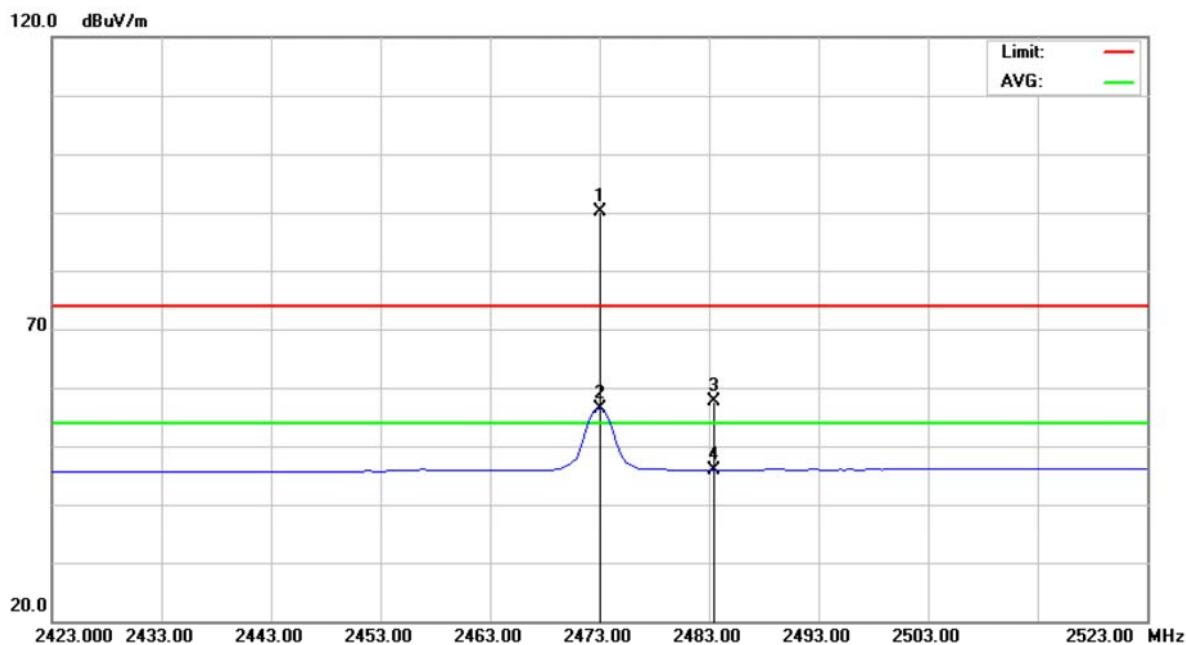
Polarization: Vertical

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1 *	2473.000	62.74	27.31	90.05	74.00	16.05	peak
2 X	2473.000	29.18	27.31	56.49	54.00	2.49	AVG
3	2483.500	30.35	27.34	57.69	74.00	-16.31	peak
4	2483.500	18.56	27.34	45.90	54.00	-8.10	AVG



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		


Polarization: Vertical

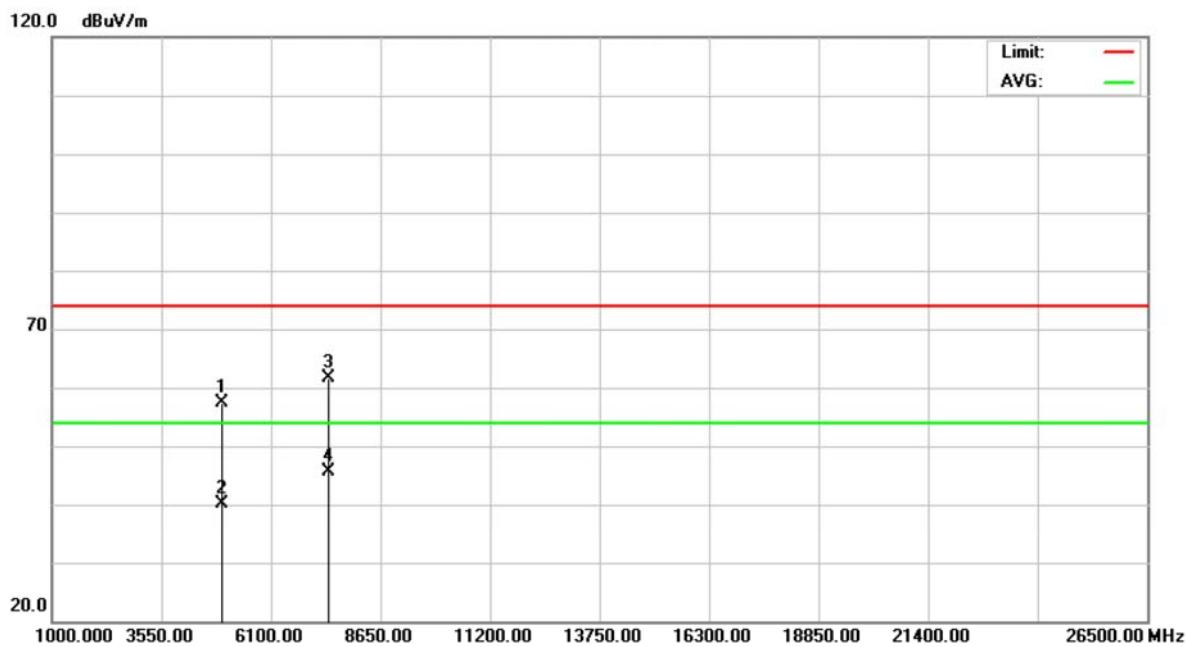

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4946.000	58.03	-0.75	57.28	74.00	-16.72	peak
2	4946.000	40.96	-0.75	40.21	54.00	-13.79	AVG
3	7418.875	56.76	4.92	61.68	74.00	-12.32	peak
4 *	7418.875	40.77	4.92	45.69	54.00	-8.31	AVG



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

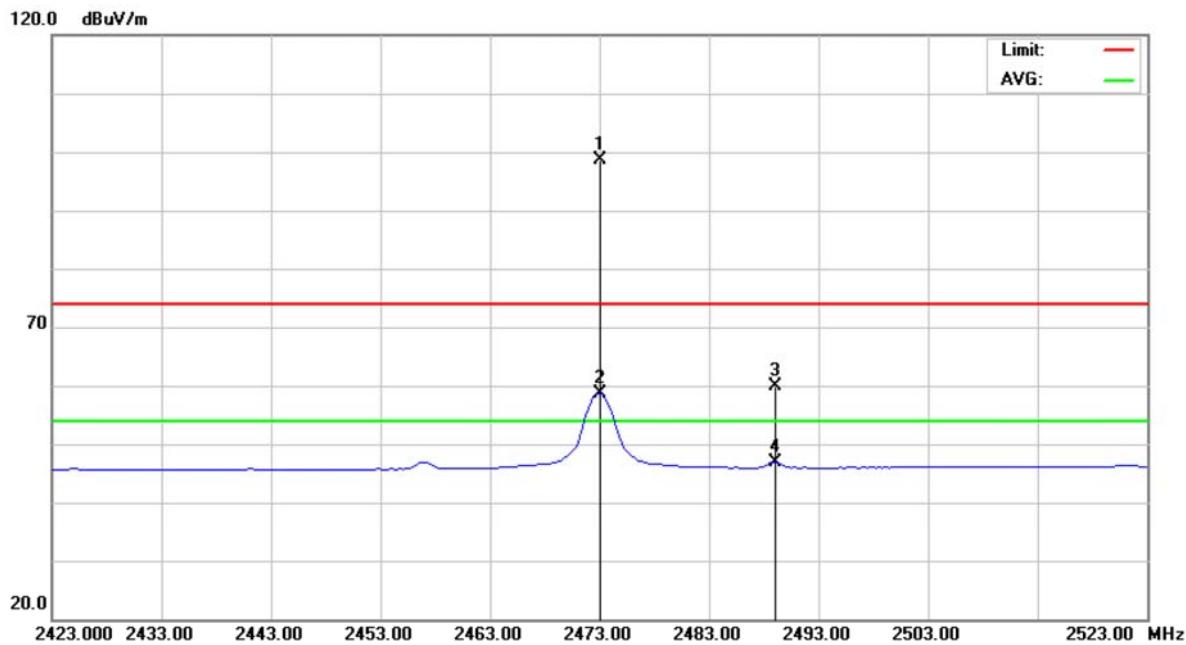
Polarization: Horizontal

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		Level	Factor	ment				
1 *	2473.000	71.43	27.31	98.74	74.00	24.74	peak	
2 X	2473.000	31.40	27.31	58.71	54.00	4.71	AVG	
3	2489.000	32.44	27.36	59.80	74.00	-14.20	peak	
4	2489.000	19.64	27.36	47.00	54.00	-7.00	AVG	



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

Polarization: Horizontal

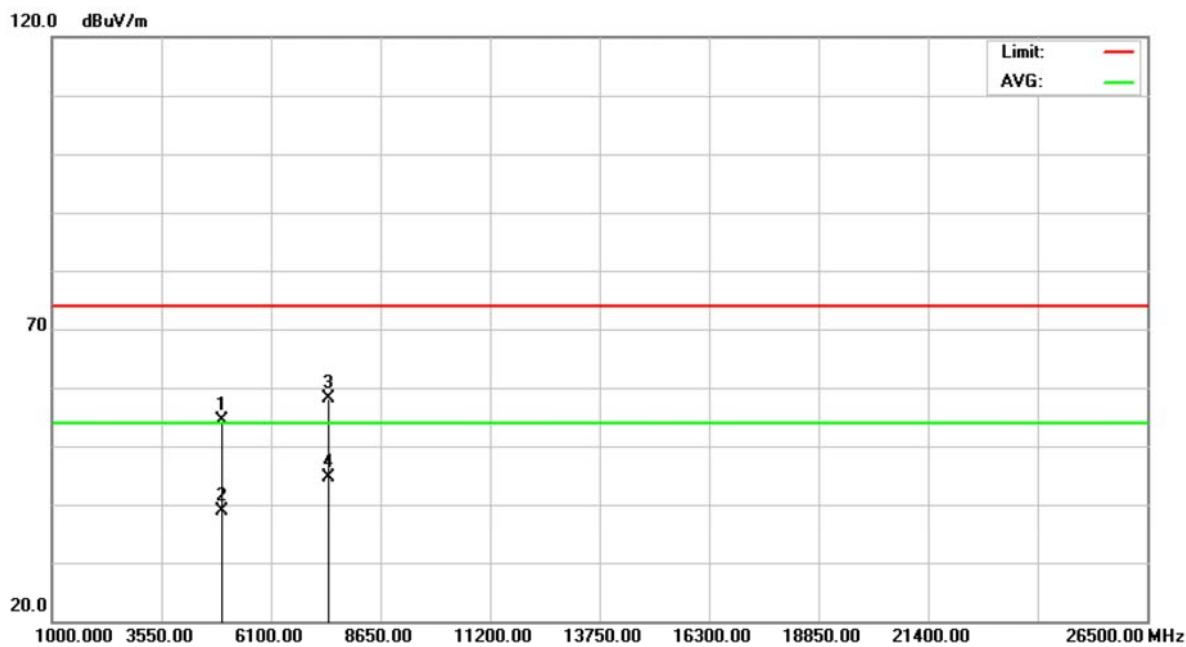


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	4945.950	55.14	-0.75	54.39	74.00	-19.61	peak
2	4945.950	39.57	-0.75	38.82	54.00	-15.18	AVG
3	7419.075	53.13	4.92	58.05	74.00	-15.95	peak
4 *	7419.075	39.76	4.92	44.68	54.00	-9.32	AVG



9.9 TEST RESULTS (RESTRICTED BANDS)

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Vertical

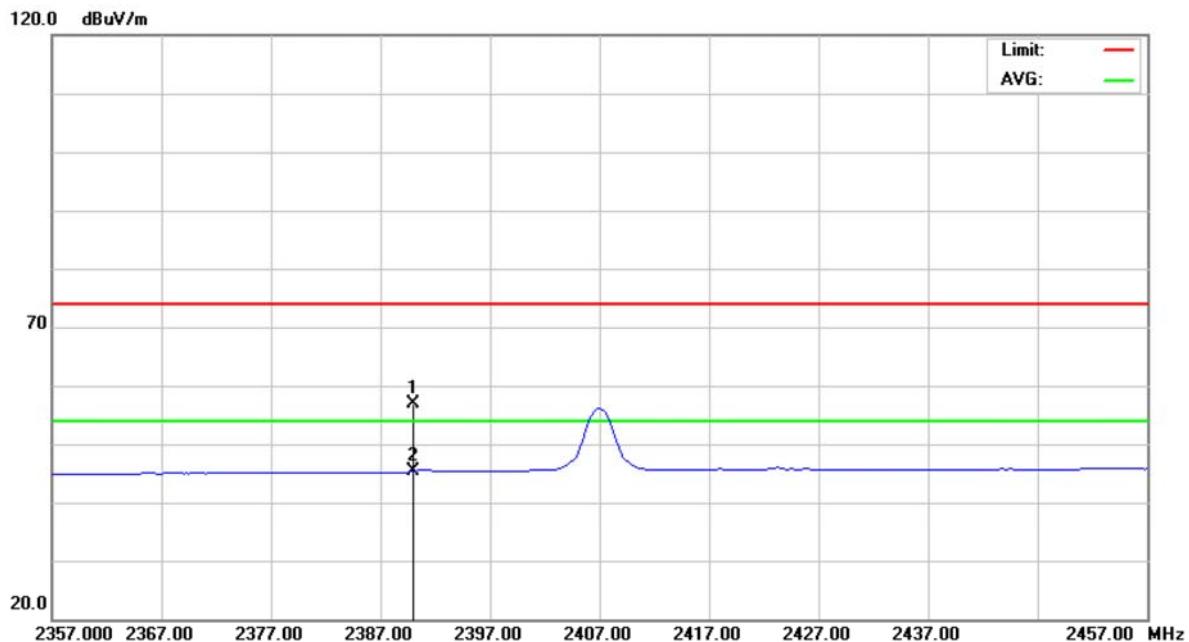


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
			Level	Factor	ment					
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	29.78	27.03	56.81	74.00	-17.19		peak	
2	*	2390.000	18.33	27.03	45.36	54.00	-8.64		AVG	



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		


Polarization: Horizontal

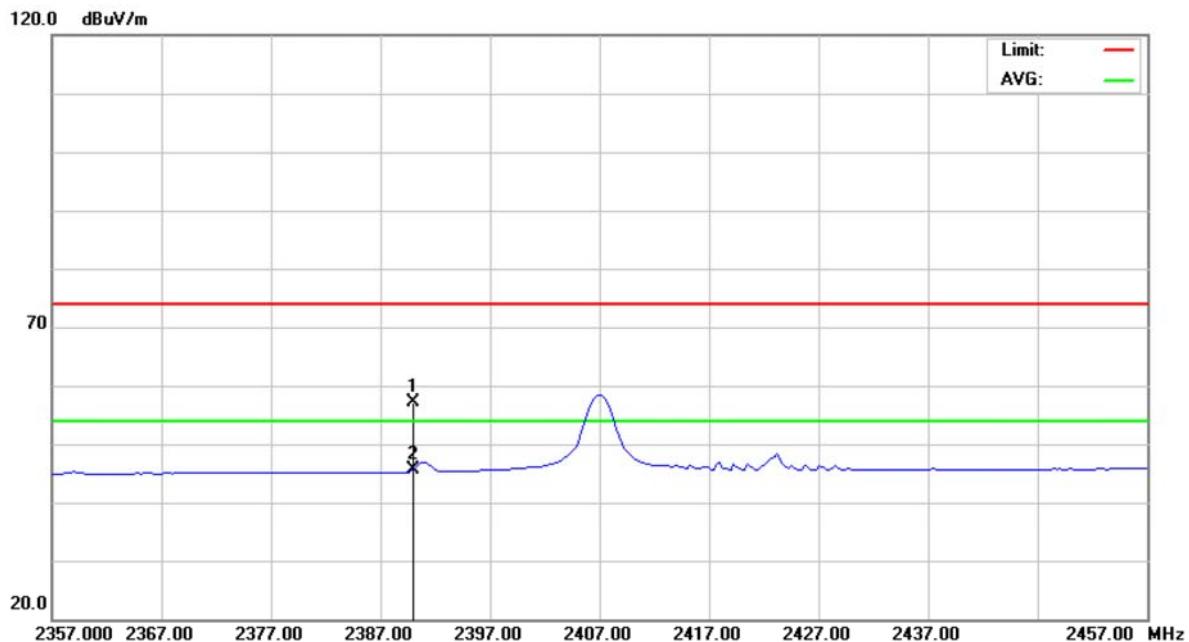

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
			Level	Factor	ment					
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	30.00	27.03	57.03	74.00	-16.97		peak	
2	*	2390.000	18.67	27.03	45.70	54.00	-8.30		AVG	




EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

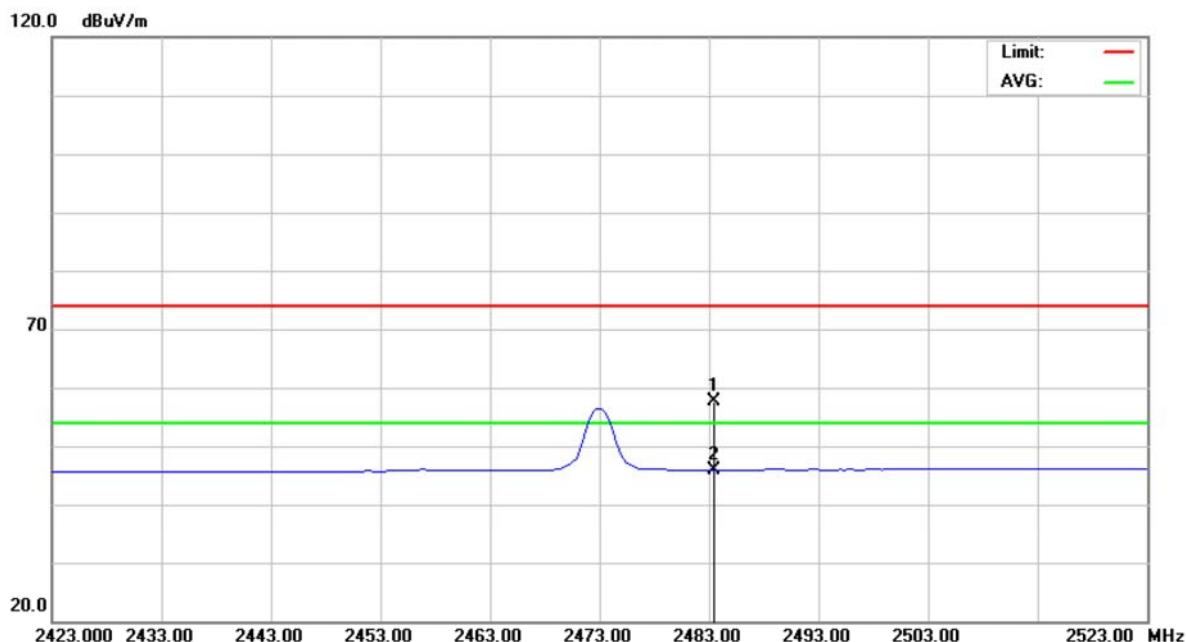Polarization: Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB _{uV}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1		2483.500	30.35	27.34	57.69	74.00	-16.31	peak	
2	*	2483.500	18.56	27.34	45.90	54.00	-8.10	Avg	



EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

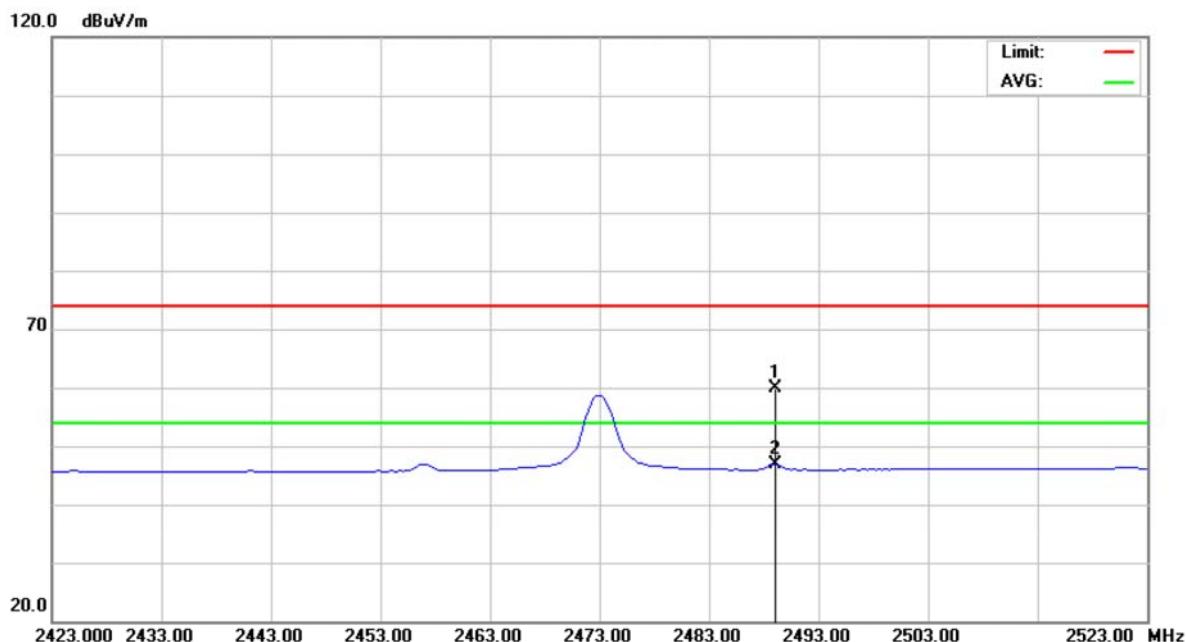Polarization: Horizontal

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB _{uV}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1		2489.000	32.44	27.36	59.80	74.00	-14.20	peak	
2	*	2489.000	19.64	27.36	47.00	54.00	-7.00	Avg	



10 POWER SPECTRAL DENSITY

10.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	2400-2483.5	8 dBm (in any 3 kHz)

10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.

10.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=30 kHz, Sweep time = 500s.

10.4 TEST SETUP LAYOUT



10.5 DEVIATION FROM TEST STANDARD

No deviation


10.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**10.7 TEST RESULTS**


EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz, 2437 MHz, 2473 MHz		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2407 MHz	-6.52	8	PASS
2437 MHz	-6.65	8	PASS
2473 MHz	-6.65	8	PASS

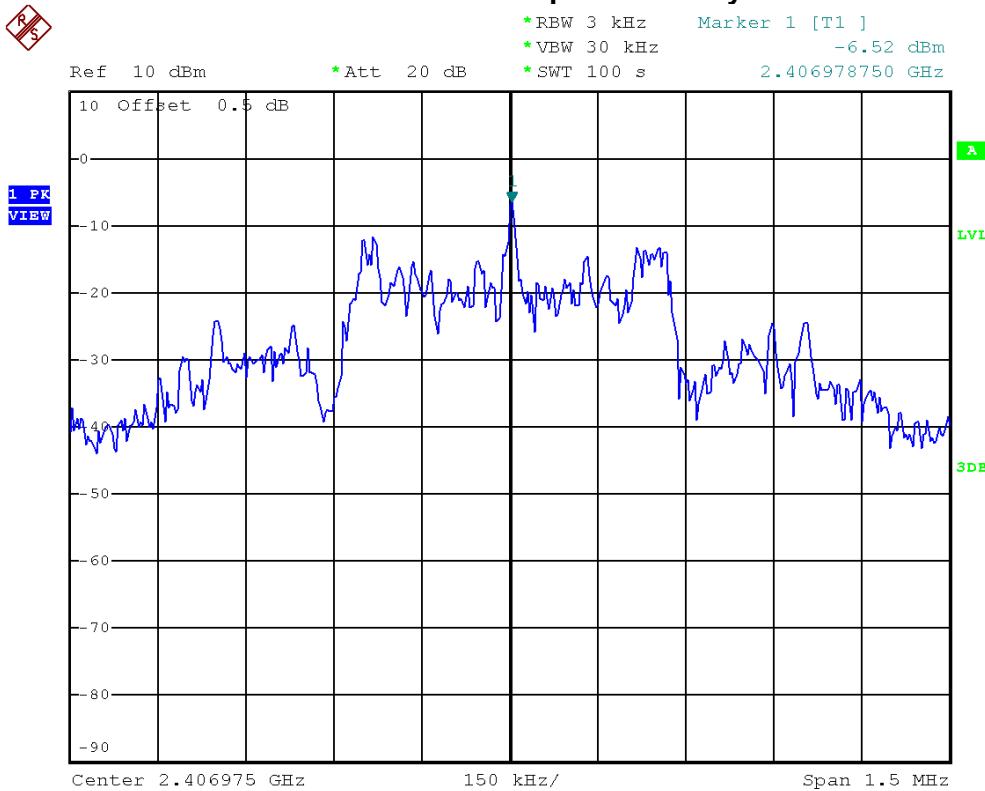
2403 MHz/Power Sepctral Density



2437 MHz/Power Sepctral Density

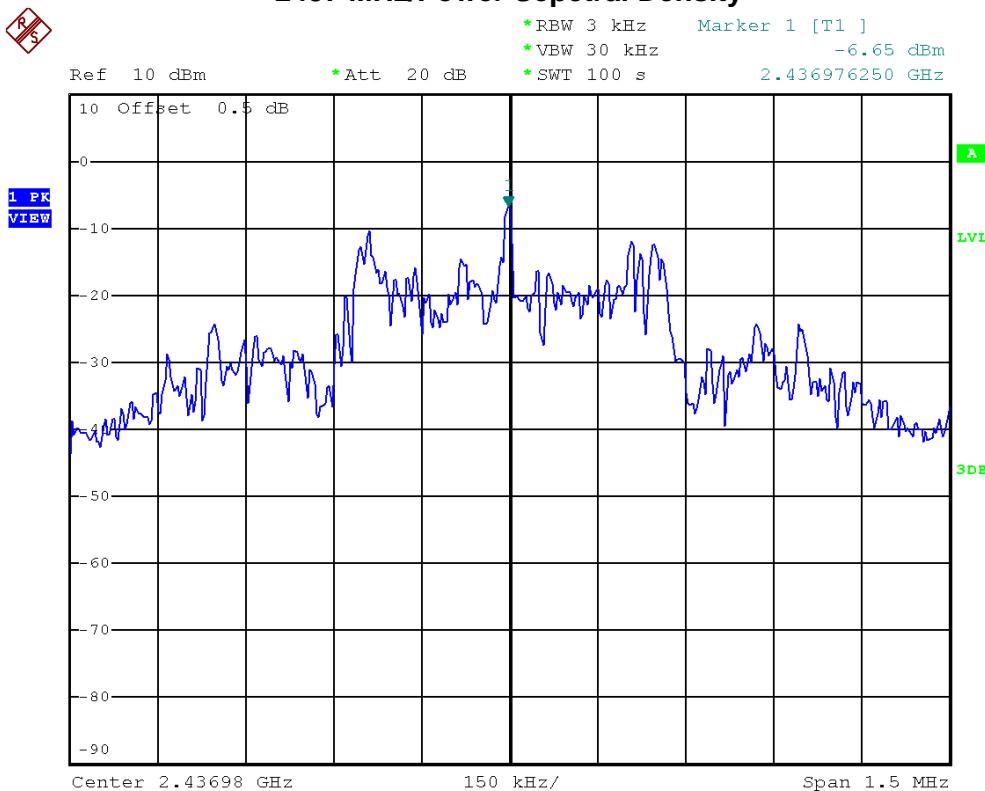

2473 MHz/Power Sepctral Density

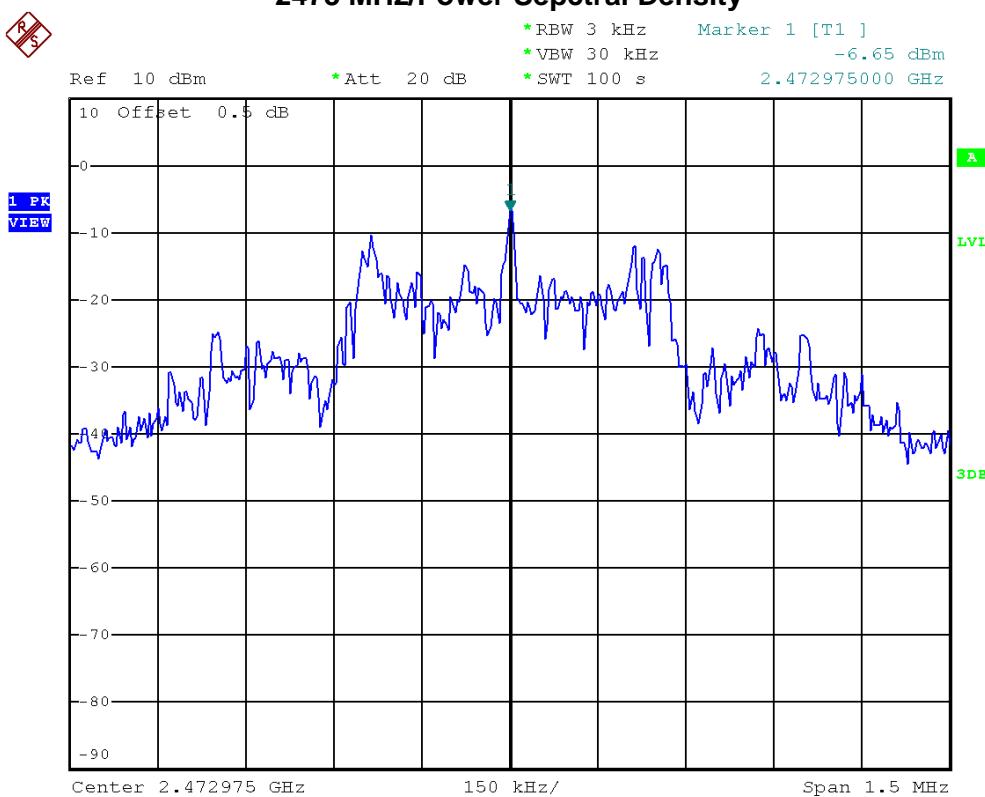



11 RF EXPOSURE COMPLIANCE

11.1 LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

NOTE: f = frequency in MHz ; *Plane-wave equivalent power density.

11.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

11.3 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



11.4 TEST SETUP LAYOUT



11.5 DEVIATION FROM TEST STANDARD

No deviation

11.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**11.7 TEST RESULTS**

EUT	2.4G RF Gaming Mouse	Model Name	R8
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2403 MHz, 2437 MHz, 2473 MHz		

Frequency	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Result
2407 MHz	-1.20	0.7586	1.6600	1.4655	0.000221	1	PASS
2437 MHz	-1.20	0.7586	1.6900	1.4757	0.000223	1	PASS
2473 MHz	-1.20	0.7586	1.6500	1.4622	0.000221	1	PASS