



DOOR SENSOR MODELS MYQ-G0302, 821LMB-SENSOR AND 041D8726

INSTALL THE DOOR SENSOR

Install with Fastening Strips

1. Remove the pull tab from the door sensor to activate the battery.
2. Position the door sensor vertically and attach to a clean, dry location on the top panel of the garage door with fastening strips (provided).

OR

Install with Screws

1. Press in the bottom of the door sensor and remove the front cover.
2. Remove the pull tab from the door sensor to activate the battery.
3. Position the door sensor vertically and attach to the top panel of the garage door with screws (provided).
4. Replace the front cover.

PROGRAM THE DOOR SENSOR

1. Use the MyQ® App to add a new door sensor.

OR

1. Press and release BUTTON 1 for door 1 or BUTTON 2 for door 2 on the Wi-Fi Hub. The yellow LED will turn solid.
2. Press the Test BUTTON on door sensor until the red LED on the door sensor turns on. The yellow LED on the Wi-Fi Hub will turn off when successfully programmed.
3. Press the Test BUTTON again on the door sensor and the Wi-Fi Hub will beep once for door 1 and twice for door 2.

TEST DOOR SENSOR

Test your door sensor every 6 months or if the MyQ system is not working as expected.

1. Press the test BUTTON on the door sensor, the LED on the door sensor should flash and the Wi-Fi Hub should beep.
2. Perform this test 6 times. If the LED doesn't flash or the Wi-Fi Hub doesn't beep each time, replace the battery in the door sensor with a CR2450 battery.



DOOR SENSOR COMPATIBILITY

Visit www.LiftMaster.com/door-sensor or www.chamberlain.com/door-sensor to see which products are compatible with this door sensor.

⚠ WARNING

To reduce the risk of SEVERE INJURY to persons:

- DO NOT enable the SMART GARAGE™ HUB or the MyQ® Garage if operating either one-piece or swinging doors. To be enabled ONLY on a sectional door.

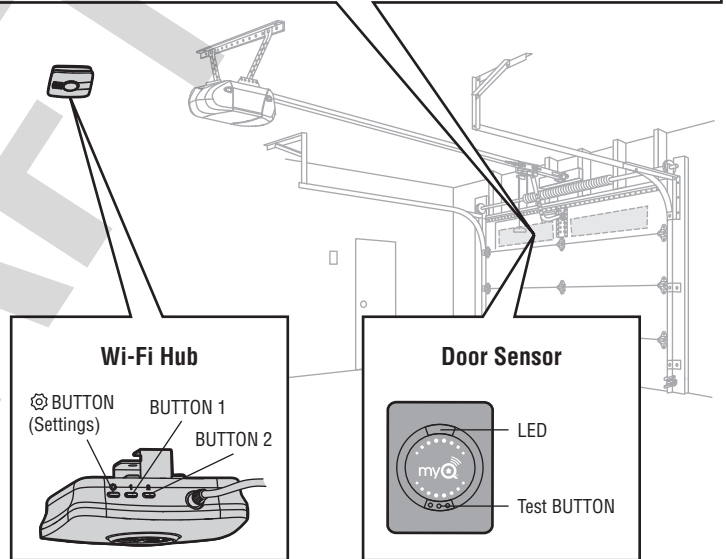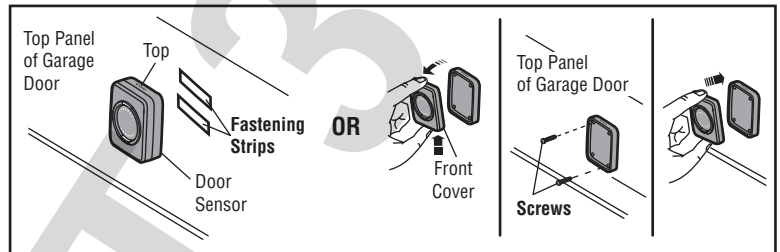

ONE YEAR LIMITED WARRANTY

The Chamberlain Group, Inc. warrants to the first consumer purchaser of this product that it is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.

NEED HELP?

Go to the Help section at www.mychamberlain.com or www.myliftmaster.com, or call Chamberlain Technical Support at 1-800-528-9131.

This device complies with Part 15 of the FCC rules and IC RSS-210. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.