


Test Photograph


Description: Conducted Emission Test Setup

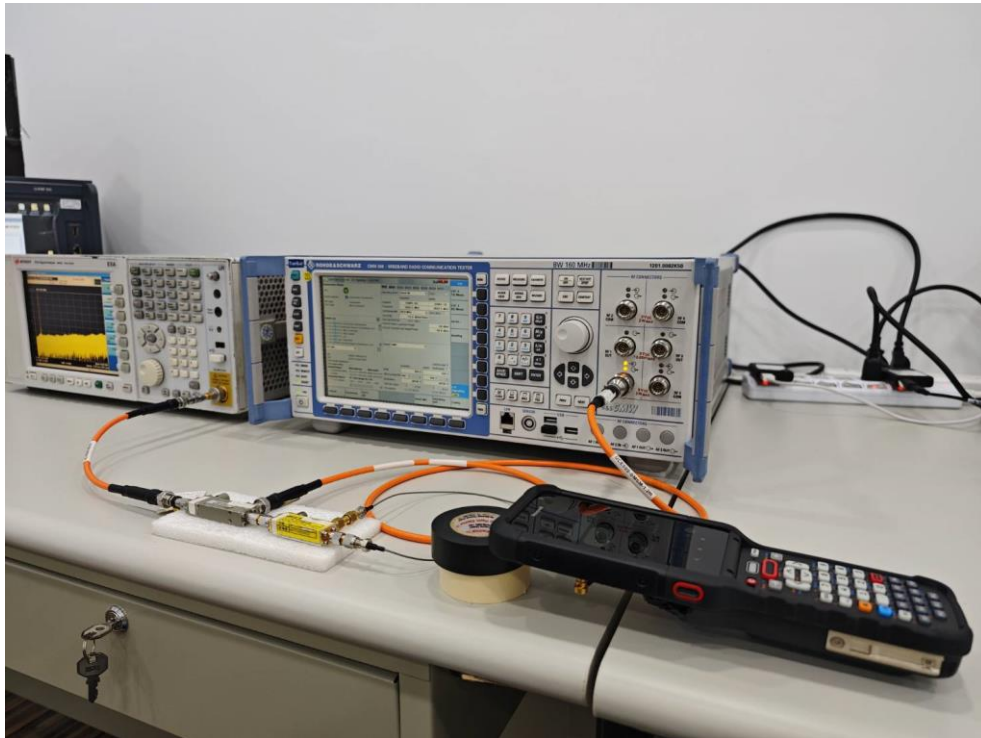


IMEI

CMW 500 V 4.0.190 - LTE Signaling 1 - V4.0.190

Connection Status

Cell:  Connection Established

Packet Switched:  Connected

RRC State: Connected

Event Log

- 01:16:23 State 'Connection Established'
- 01:16:23 EPS Dedicated Bearer Established, Id 7
- 01:16:20 State 'Attached'
- 01:16:20 EPS Default Bearer Established, Id 6
- 01:16:20 EPS Default Bearer Established, Id 5
- 01:16:17 RRC Connection Established
- 01:15:43 State 'Cell On', 1CC 1x1

UE Info

IMEI: 990021490036207

IMSI: 001012345678901

Voice Domain Preference: —

UE's Usage Setting: —

Default Bearer

IPv4 address: 172.22.1.100 fc01:abab:cdcd:efe

IPv6 prefix: 172.22.1.101 fc01:abab:cdcd:efe

TFT Port Range DL / UL: 5005 - 5008 / 5005 - 5008

Dedicated Bearer

7 (->5, Default)

Operating Band: Band 2 FDD

Channel: 900 Ch 18900 Ch

Frequency: 1960.0 MHz 1880.0 MHz

Cell Bandwidth: 10.0 MHz 10.0 MHz

RS EPRE: -77.8 dBm/15kHz

Full Cell BW Pow.: -50.0 dBm

PUSCH Open Loop Nom.Power: -20 dBm

PUSCH Closed Loop Target Power: -20.0 dBm

Sched.: RMC

RB: 50 50

RB Pos./Start RB: low 0 low 0

Modulation: QPSK QPSK

TBS Idx / Value: 5 4392 6 5160

Throughput: 3.953 Mbit/s 5.160 Mbit/s

64/256-QAM: ☐

Multicaster: ☐

LTE Signaling: **Run**