


The Result of Radiated Emission below 1GHz:

Site	SIP-AC3	Test Date	2025-01-22
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Fusco Pan
Factor	VULB 9168_00997	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

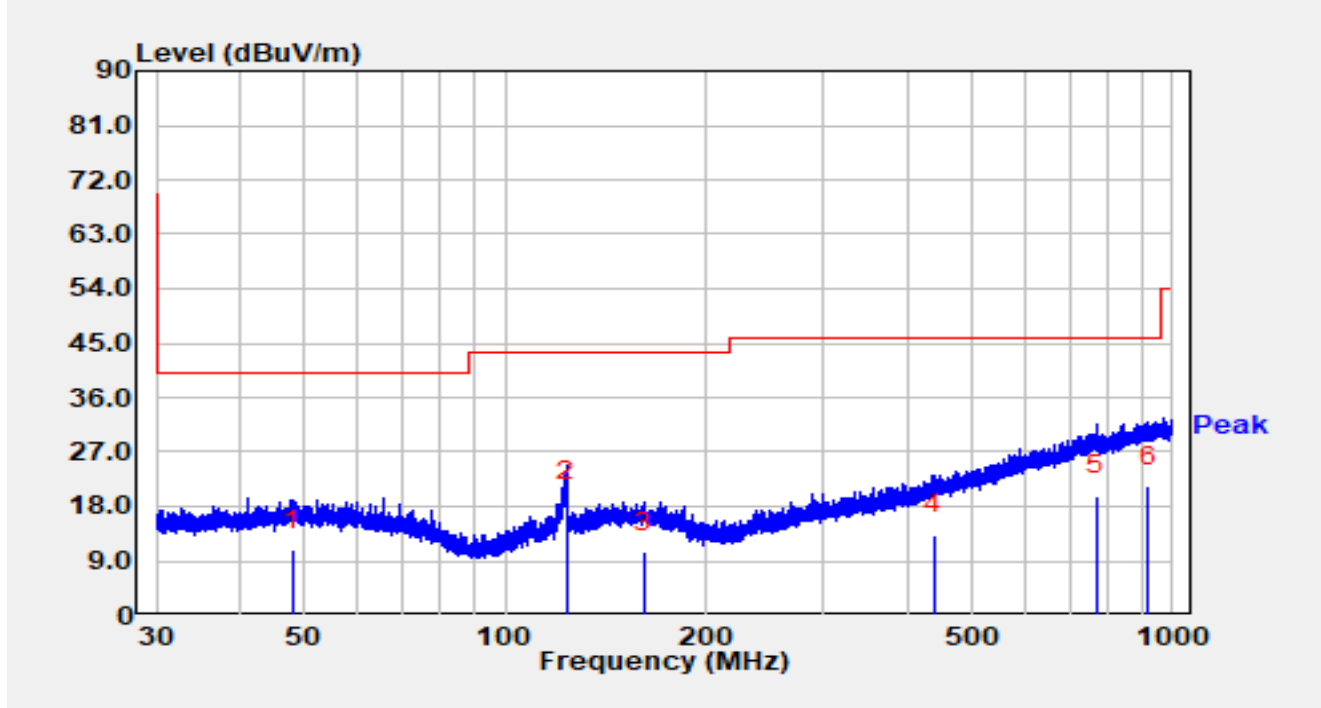


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		48.045	-7.84	18.64	10.80	-29.20	40.00	QP
2	*	123.395	2.40	16.42	18.82	-24.68	43.50	QP
3		161.191	-7.85	18.26	10.41	-33.09	43.50	QP
4		439.425	-8.80	22.05	13.25	-32.75	46.00	QP
5		767.132	-8.74	28.61	19.87	-26.13	46.00	QP
6		919.609	-8.69	30.00	21.31	-24.69	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-01-22
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Fusco Pan
Factor	VULB 9168_00997	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

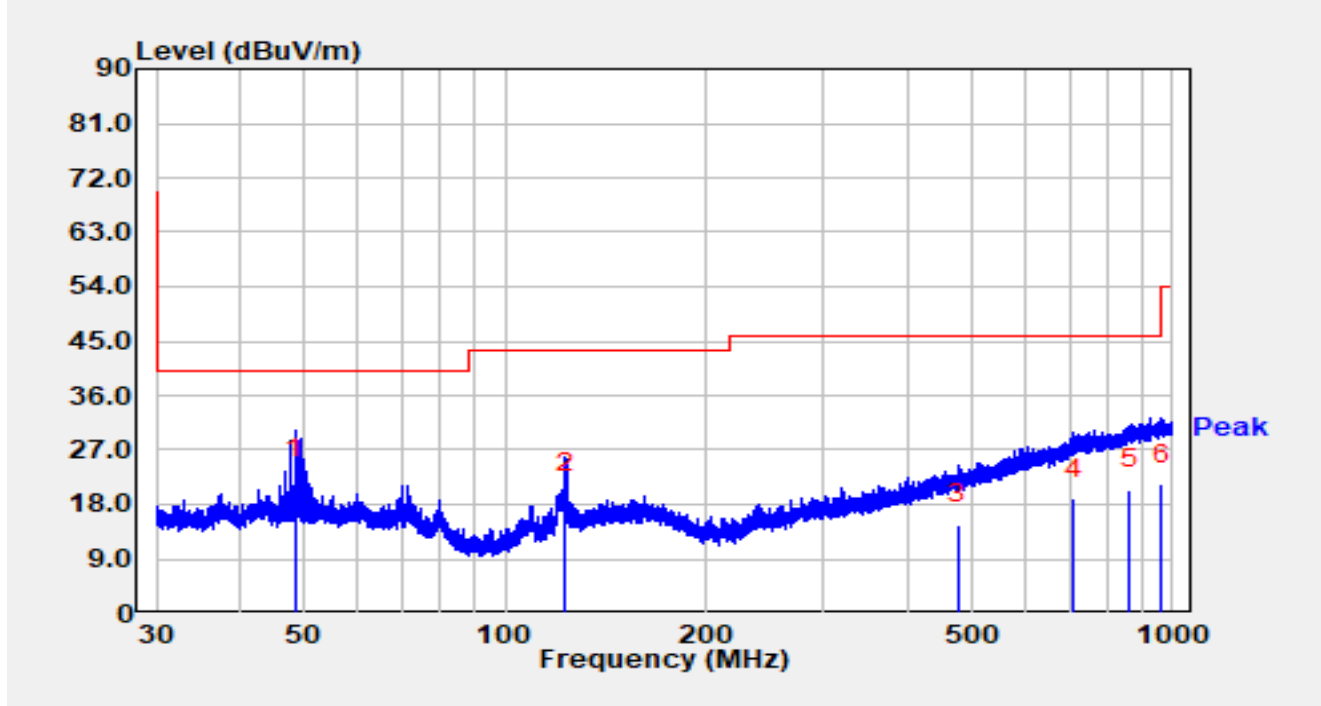

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	48.417	3.75	18.64	22.39	-17.61	40.00	QP
2		122.963	3.36	16.38	19.74	-23.76	43.50	QP
3		476.501	-7.96	22.71	14.75	-31.25	46.00	QP
4		712.672	-8.26	27.27	19.01	-26.99	46.00	QP
5		861.242	-8.85	29.29	20.44	-25.56	46.00	QP
6		964.865	-8.96	30.25	21.29	-32.71	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Data for EUT with Engine S0703

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-02-26	Test Mode	802.11a – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10040.6	47.5	-1.4	46.1	68.2	-22.1	Peak	Horizontal
	12328.8	47.7	-1.0	46.7	74.0	-27.3	Peak	Horizontal
	15701.6	44.8	6.0	50.8	74.0	-23.2	Peak	Horizontal
*	17051.4	45.1	8.1	53.2	68.2	-15.0	Peak	Horizontal
*	7092.8	53.7	-5.0	48.7	68.2	-19.5	Peak	Vertical
	10640.7	49.0	-1.8	47.2	74.0	-26.8	Peak	Vertical
	15727.1	45.5	5.4	50.9	74.0	-23.1	Peak	Vertical
*	17131.3	45.4	8.1	53.5	68.2	-14.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

A.8 Radiated Restricted Band Edge Test Result

Test Data for EUT with Engine S0803FR

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

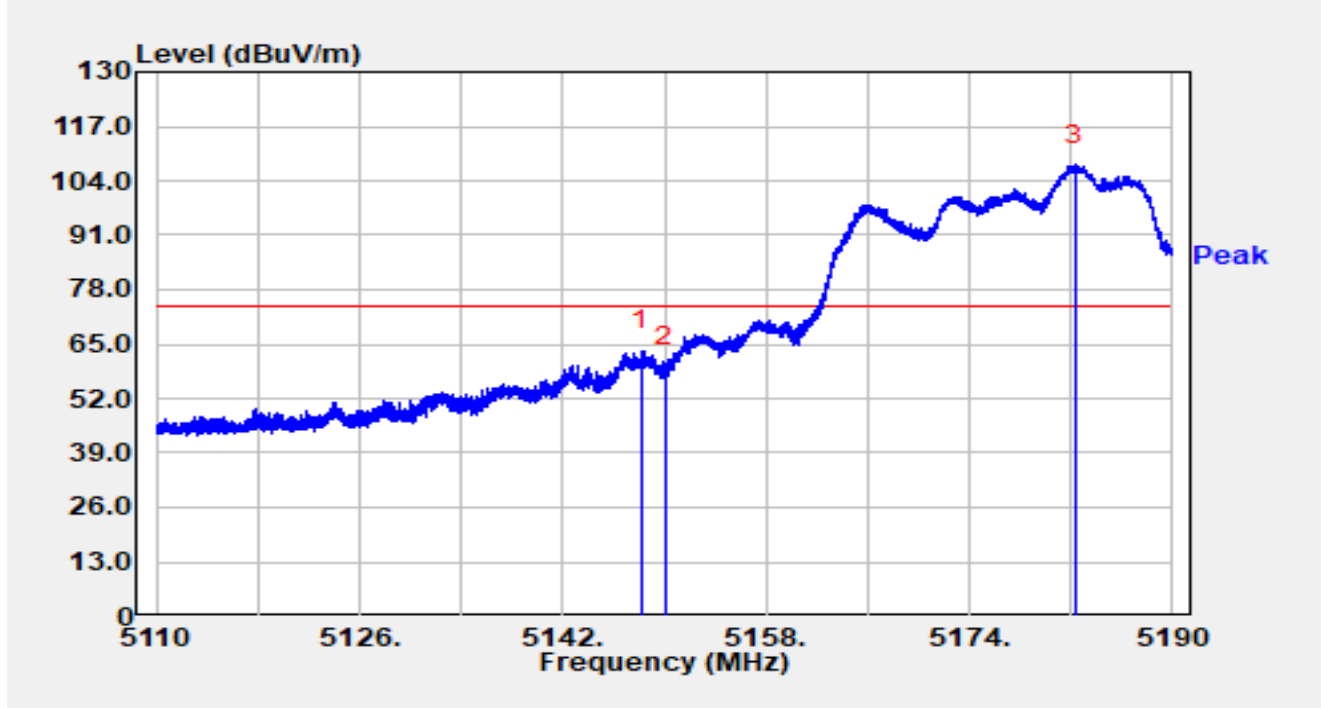


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.200	66.02	-2.55	63.47	-10.53	74.00	Peak
2		5150.000	61.94	-2.21	59.73	-14.27	74.00	Peak
3		5182.344	67.81	39.88	107.69	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

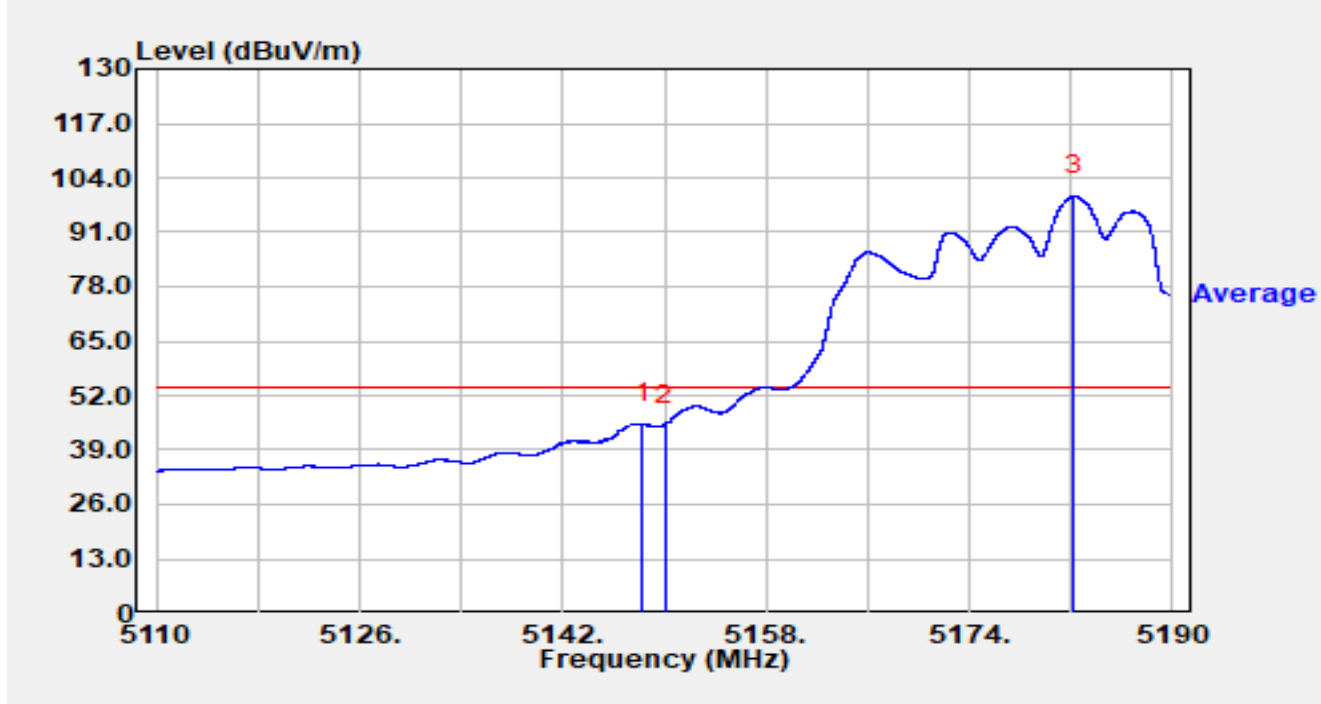


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.248	47.72	-2.55	45.17	-8.83	54.00	Average
2		5150.000	47.17	-2.21	44.96	-9.04	54.00	Average
3		5182.272	59.67	40.03	99.70	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

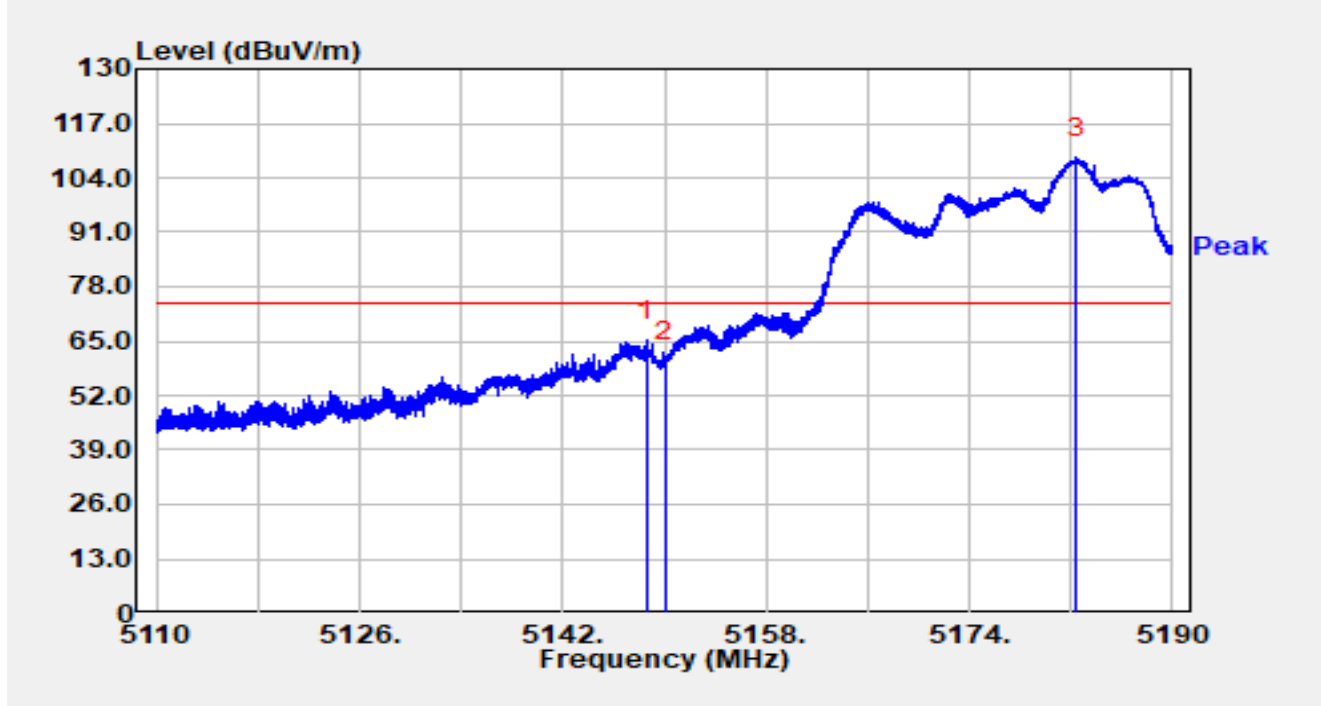


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.536	67.68	-2.49	65.19	-8.81	74.00	Peak
2		5150.000	62.42	-2.21	60.21	-13.79	74.00	Peak
3		5182.424	69.15	39.71	108.86	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

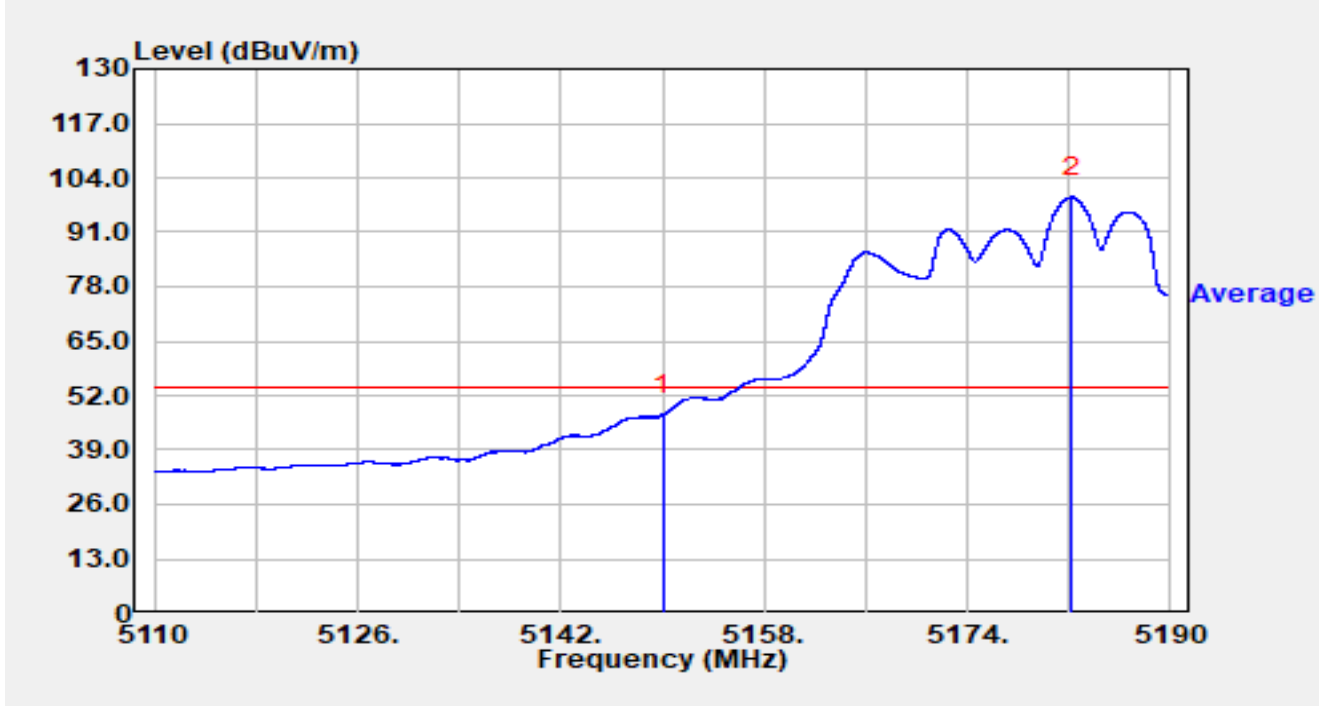


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	49.63	-2.21	47.42	-6.58	54.00	Average
2		5182.192	59.25	40.19	99.44	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

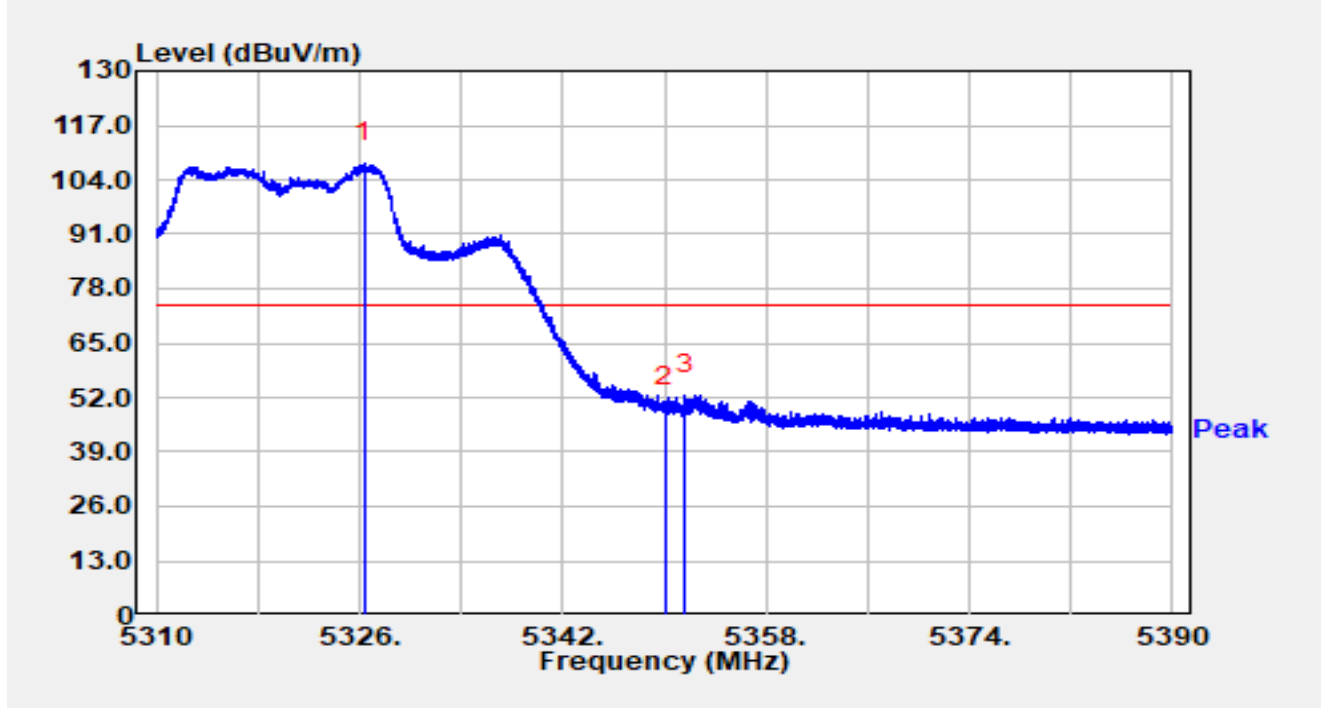


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.392	68.97	39.10	108.07	N/A	N/A	Peak
2		5350.000	51.25	-1.38	49.88	-24.12	74.00	Peak
3	*	5351.608	54.82	-2.14	52.67	-21.33	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

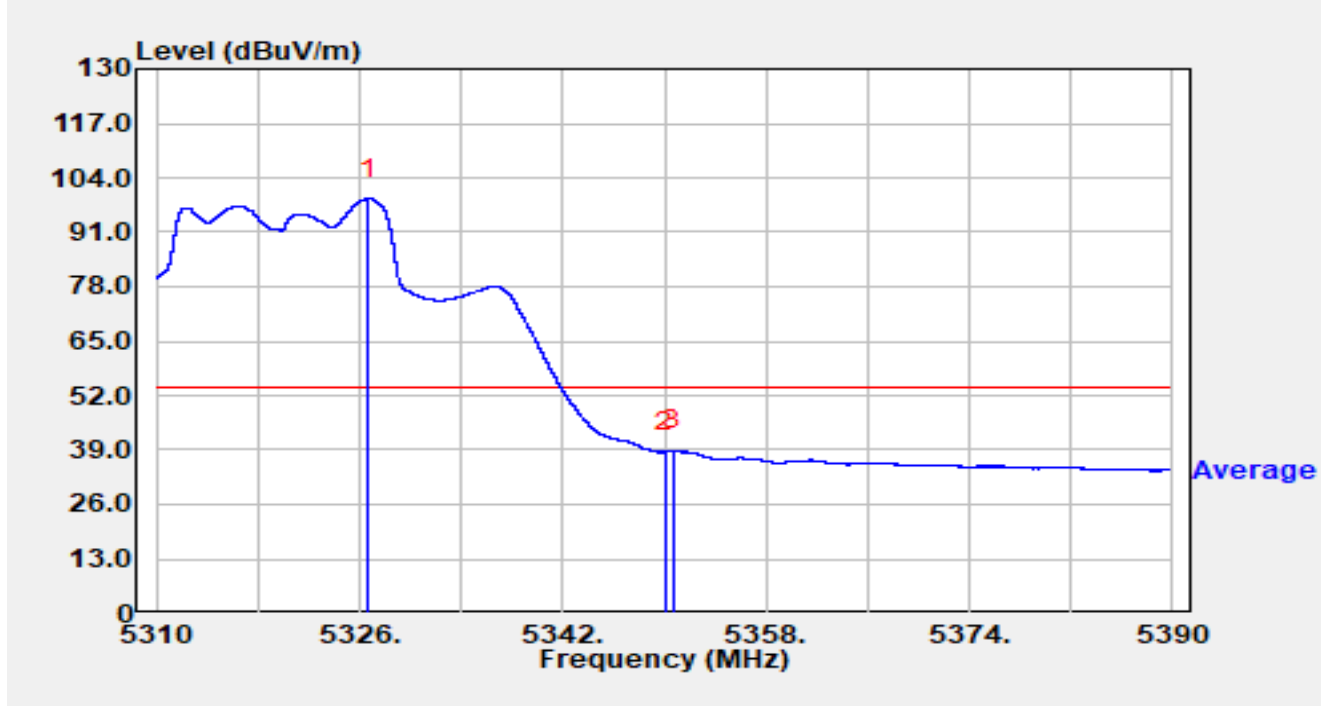


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.648	59.82	39.23	99.05	N/A	N/A	Average
2		5350.000	39.91	-1.38	38.53	-15.47	54.00	Average
3	*	5350.656	40.54	-1.72	38.82	-15.18	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

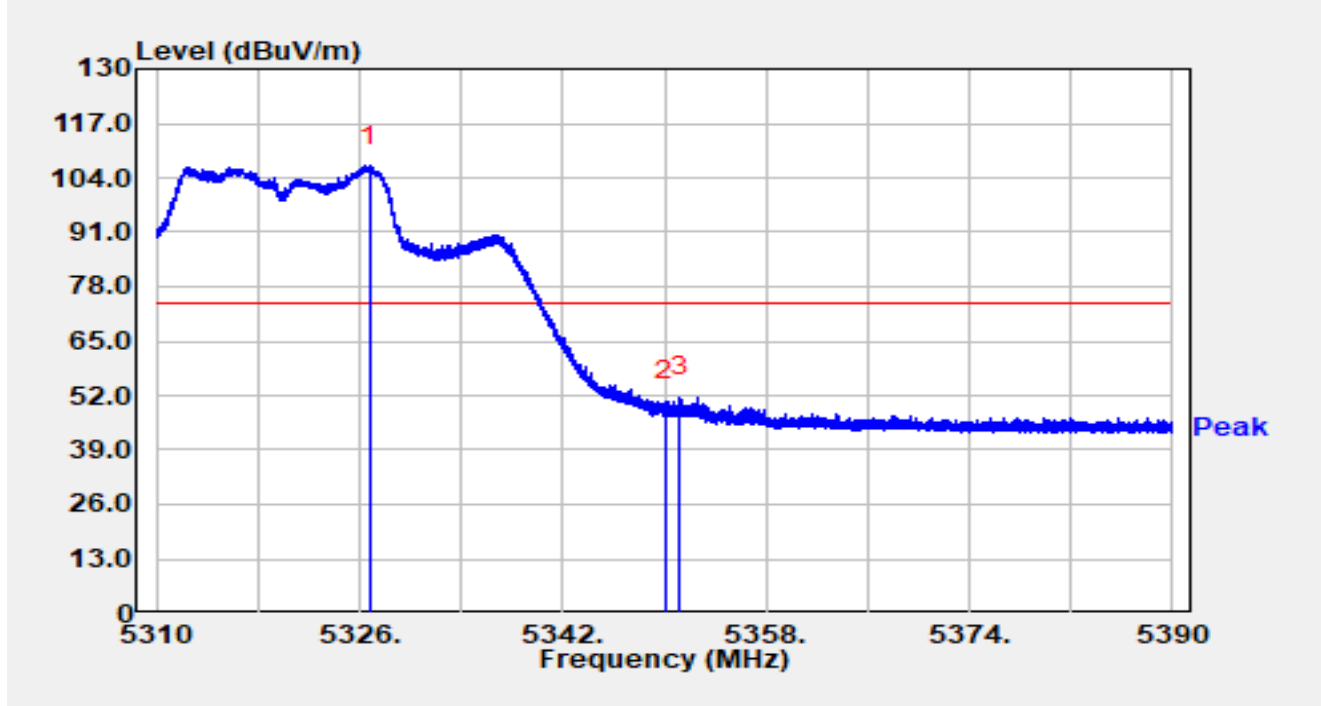


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.808	67.51	39.31	106.82	N/A	N/A	Peak
2		5350.000	52.06	-1.38	50.68	-23.32	74.00	Peak
3	*	5351.168	53.67	-1.97	51.71	-22.29	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

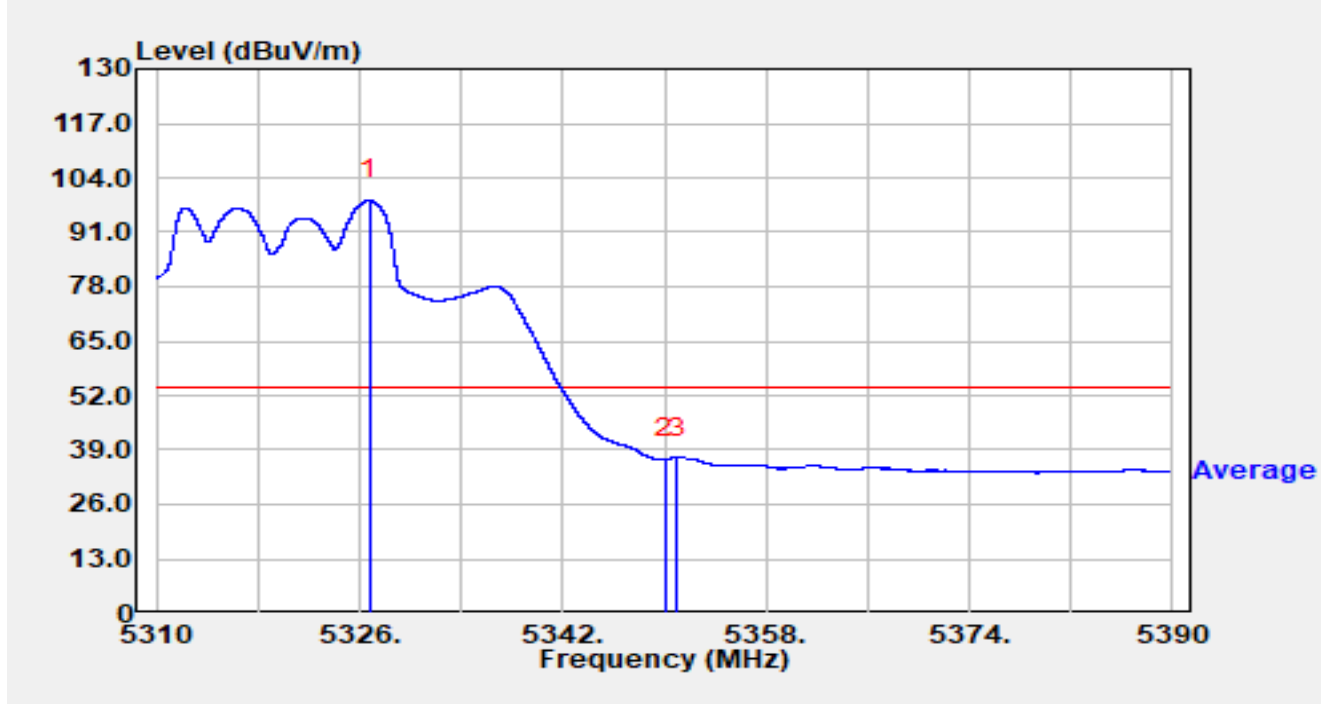


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.800	59.37	39.30	98.68	N/A	N/A	Average
2		5350.000	38.28	-1.38	36.90	-17.10	54.00	Average
3	*	5351.008	39.15	-1.89	37.26	-16.74	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

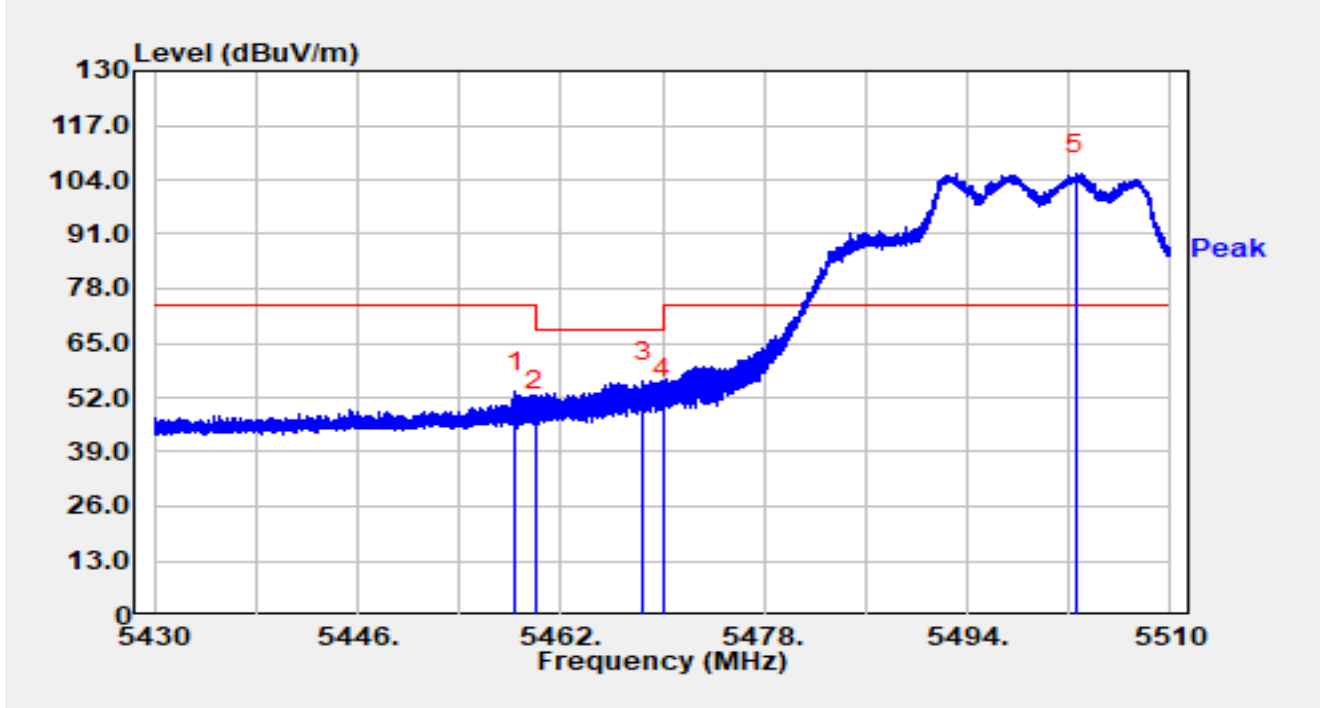


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.376	55.90	-2.66	53.23	-20.77	74.00	Peak
2		5460.000	51.30	-2.55	48.75	-19.45	68.20	Peak
3	*	5468.488	57.16	-1.25	55.90	-12.30	68.20	Peak
4		5470.000	52.75	-0.76	51.99	-16.21	68.20	Peak
5		5502.576	63.39	41.95	105.34	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

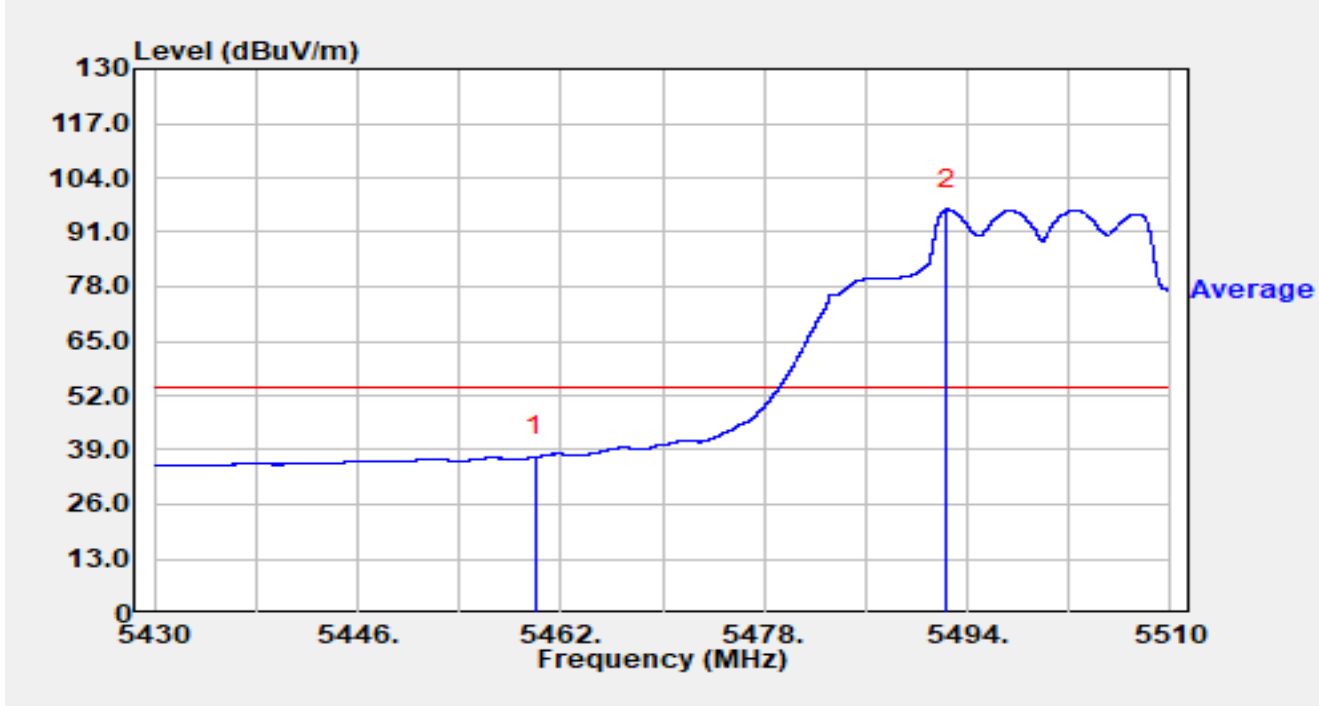


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	39.90	-2.55	37.35	-16.65	54.00	Average
2		5492.400	50.71	45.70	96.42	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

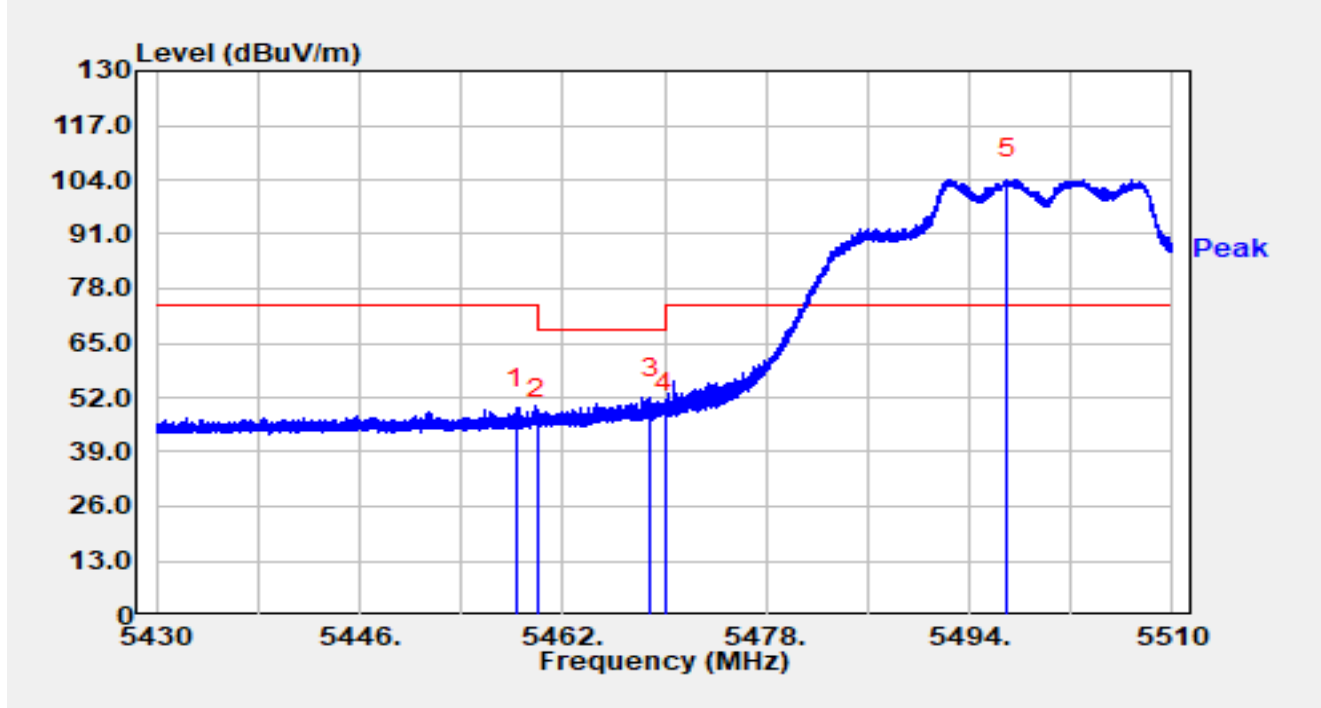


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.328	52.04	-2.67	49.37	-24.63	74.00	Peak
2		5460.000	49.24	-2.55	46.68	-21.52	68.20	Peak
3	*	5468.896	53.03	-1.14	51.88	-16.32	68.20	Peak
4		5470.000	49.30	-0.76	48.54	-19.66	68.20	Peak
5		5496.952	65.16	38.88	104.04	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

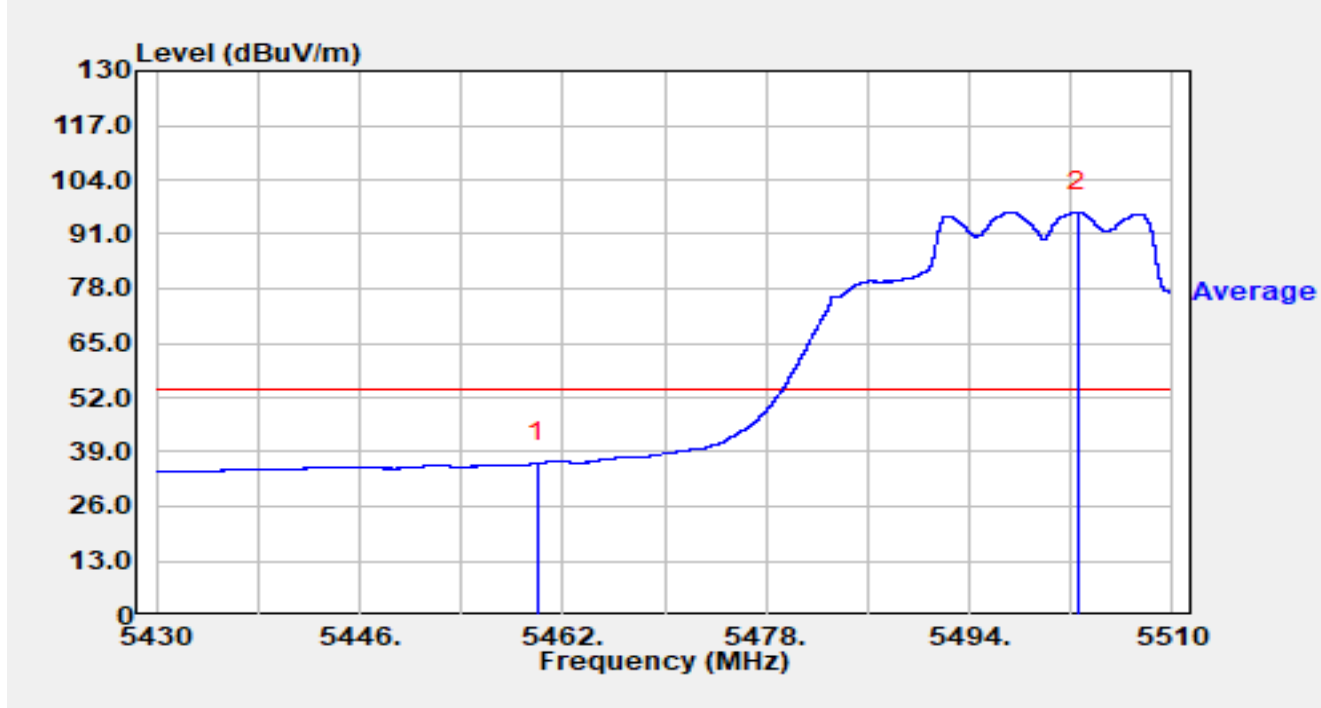


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	38.95	-2.55	36.40	-17.60	54.00	Average
2		5502.504	54.42	41.80	96.22	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

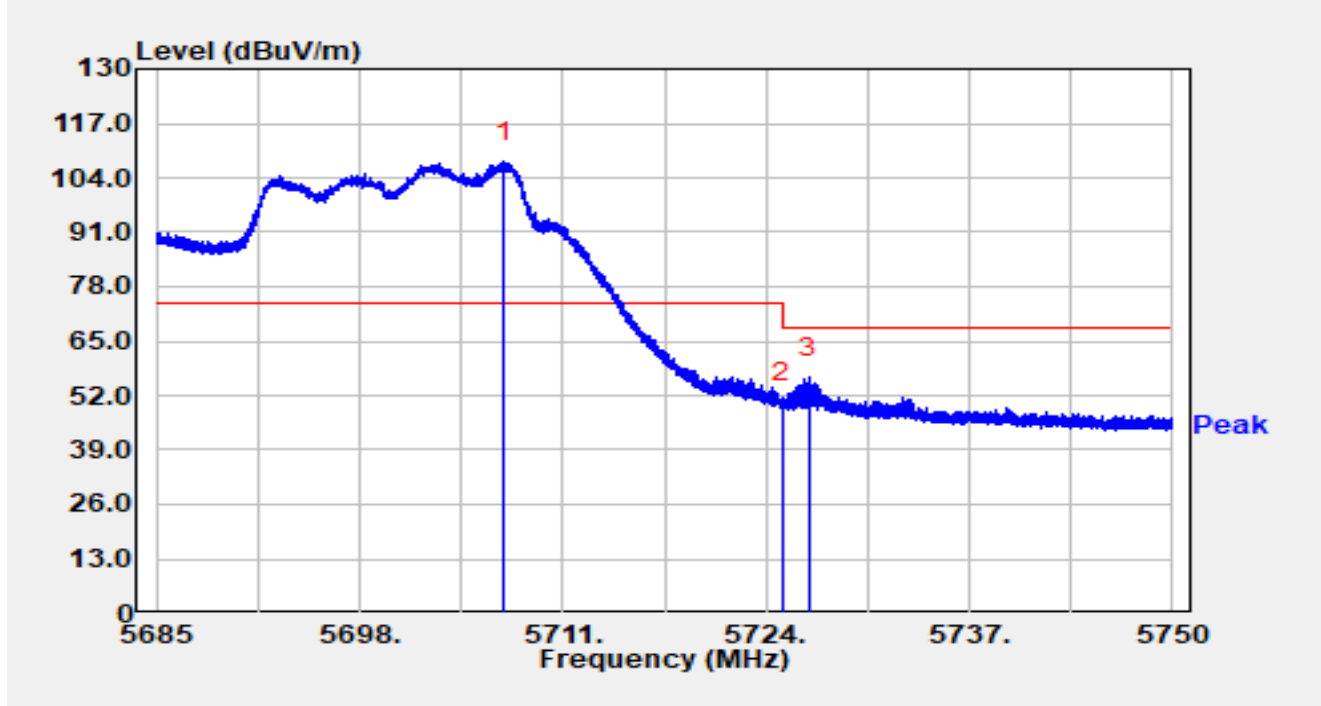


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.236	67.28	40.40	107.68	N/A	N/A	Peak
2		5725.000	51.27	-0.89	50.37	-17.83	68.20	Peak
3	*	5726.704	58.10	-1.73	56.37	-11.83	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

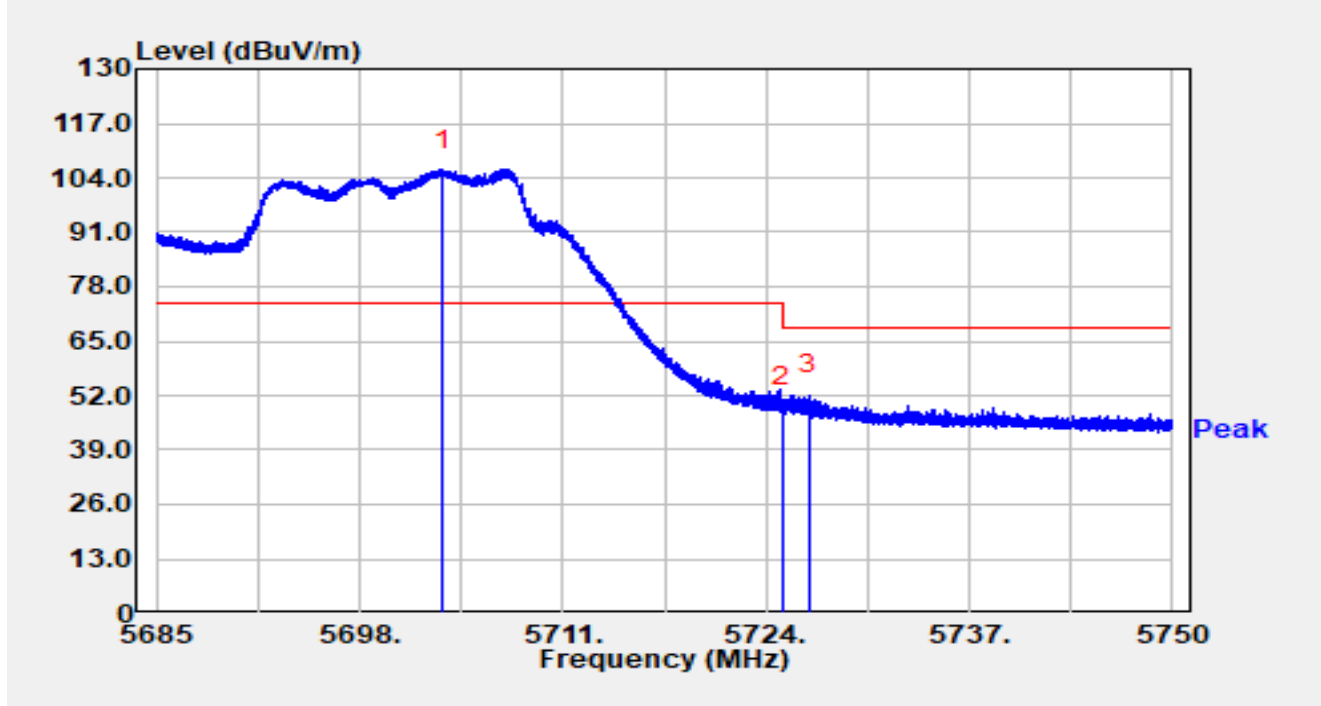


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.291	67.07	38.79	105.86	N/A	N/A	Peak
2		5725.000	49.99	-0.89	49.09	-19.11	68.20	Peak
3	*	5726.724	53.89	-1.74	52.15	-16.05	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

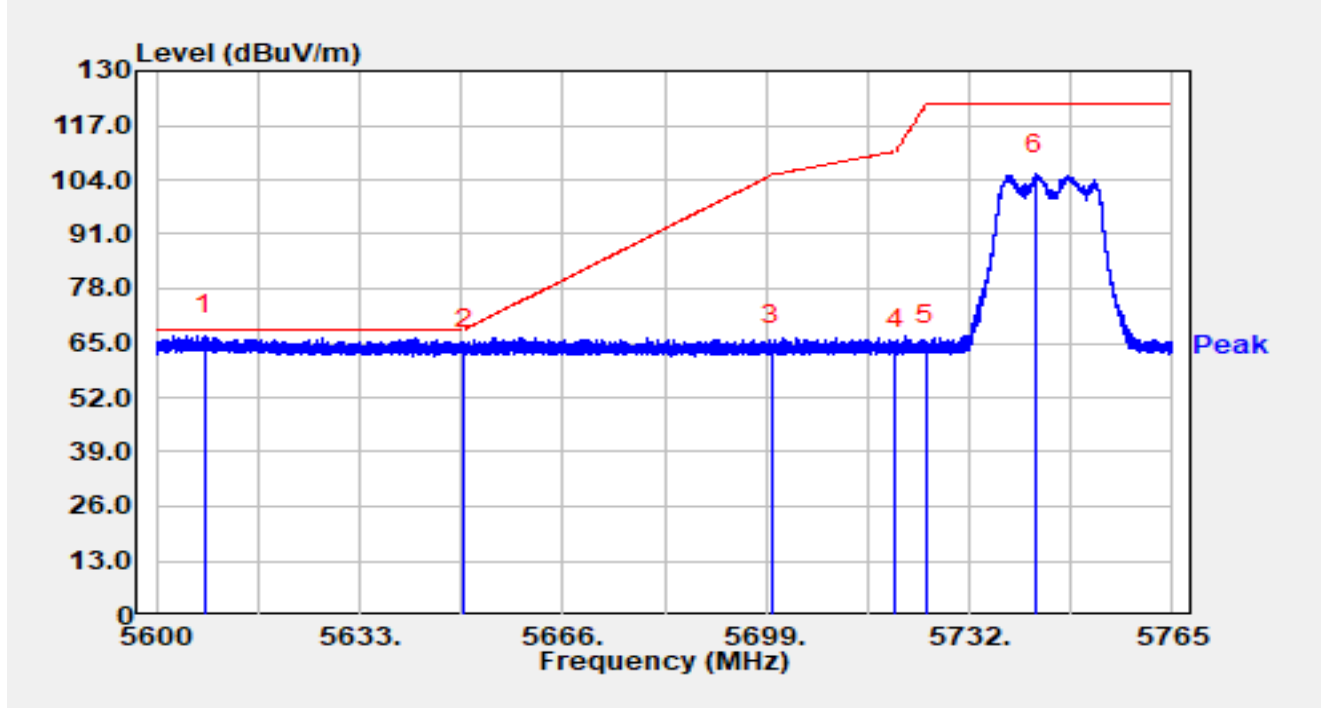


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5607.887	59.53	7.30	66.84	-1.36	68.20	Peak
2		5650.000	57.16	6.58	63.74	-4.46	68.20	Peak
3		5700.000	58.19	6.47	64.66	-40.54	105.20	Peak
4		5720.000	56.98	6.65	63.64	-47.16	110.80	Peak
5		5725.000	58.00	6.66	64.66	-57.54	122.20	Peak
6		5742.774	99.08	6.32	105.40	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

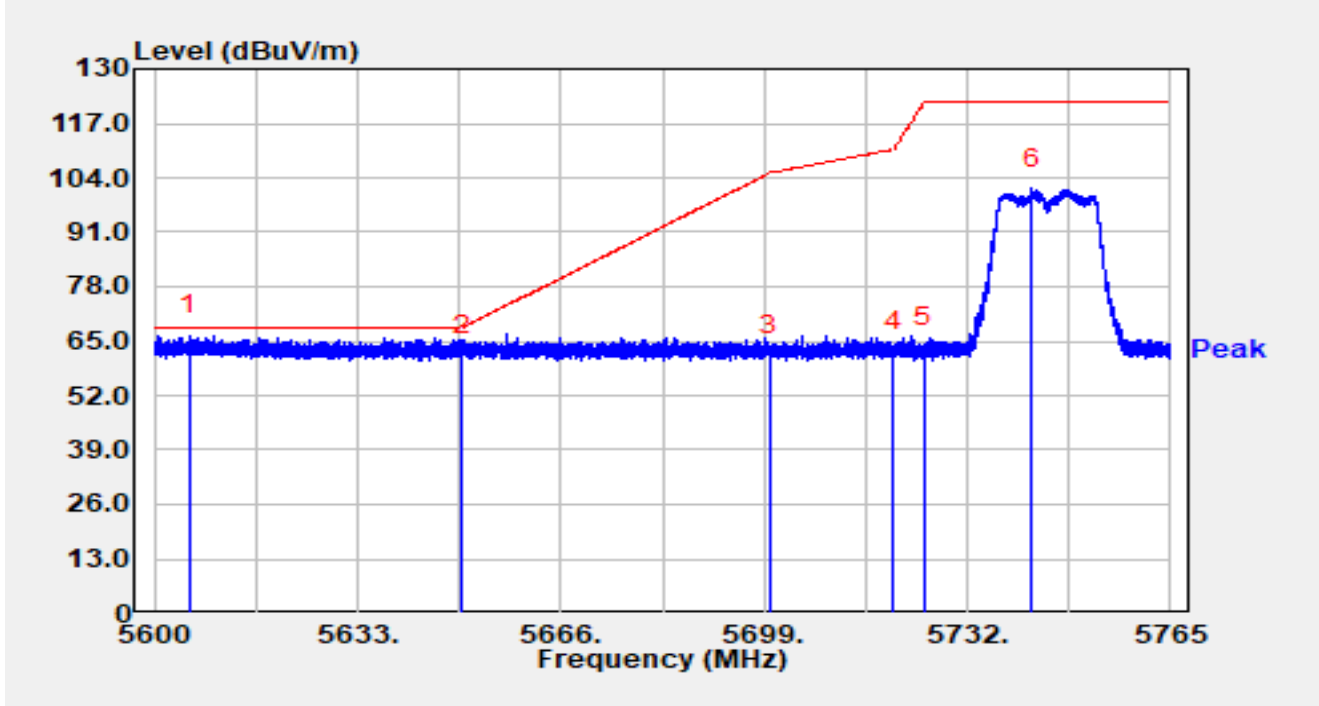


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5605.660	59.14	7.30	66.44	-1.76	68.20	Peak
2		5650.000	55.13	6.58	61.71	-6.49	68.20	Peak
3		5700.000	54.90	6.47	61.37	-43.83	105.20	Peak
4		5720.000	55.91	6.65	62.57	-48.23	110.80	Peak
5		5725.000	56.94	6.66	63.61	-58.59	122.20	Peak
6		5742.444	95.00	6.33	101.33	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

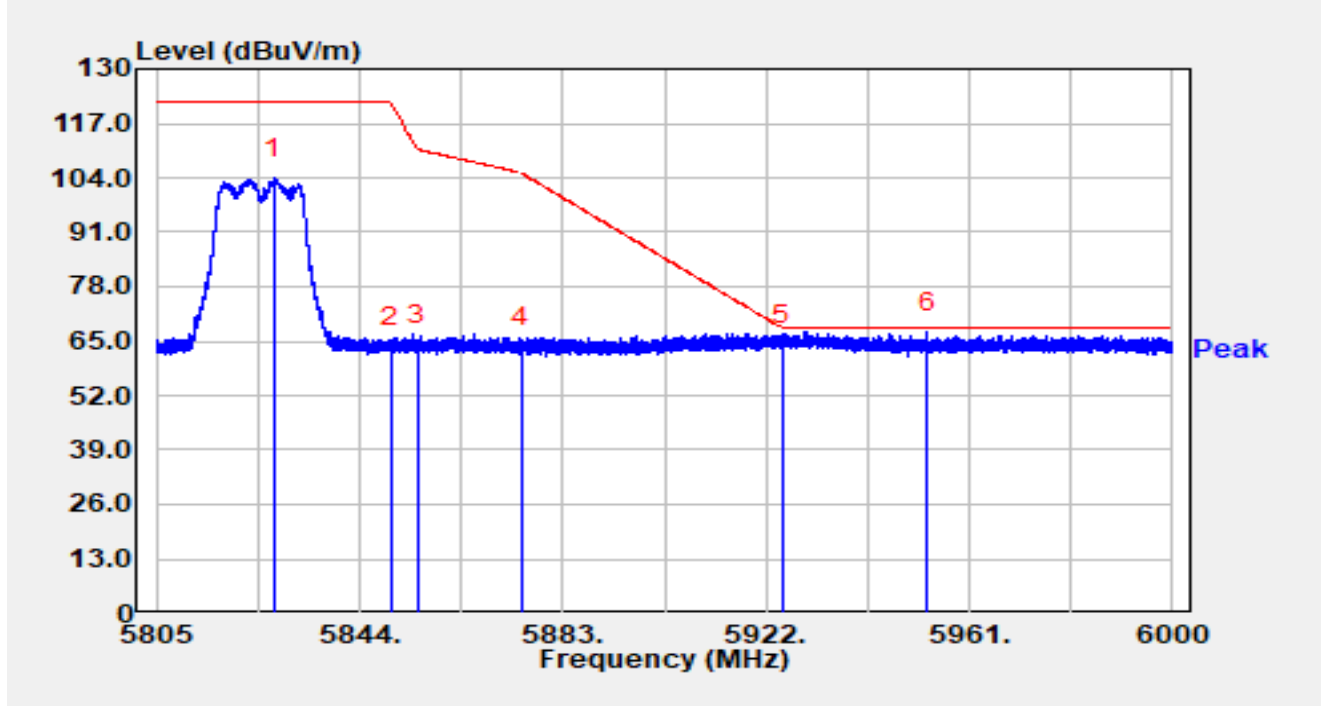


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.503	97.31	6.56	103.87	N/A	N/A	Peak
2		5850.000	56.90	6.85	63.75	-58.45	122.20	Peak
3		5855.000	57.04	6.91	63.95	-46.85	110.80	Peak
4		5875.000	56.72	6.65	63.38	-41.82	105.20	Peak
5		5925.000	56.07	7.73	63.80	-4.40	68.20	Peak
6	*	5952.966	60.37	6.83	67.20	-1.00	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

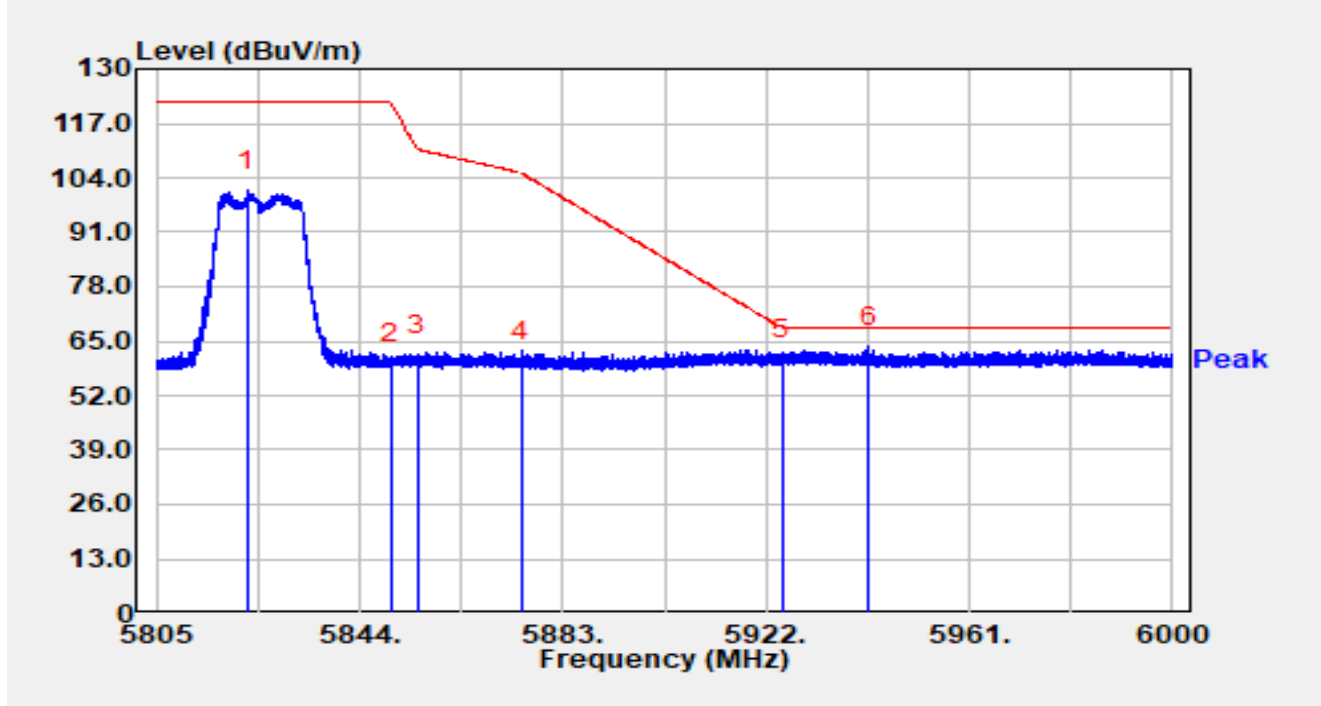


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.530	94.30	6.55	100.85	N/A	N/A	Peak
2		5850.000	52.79	6.85	59.65	-62.55	122.20	Peak
3		5855.000	54.87	6.91	61.78	-49.02	110.80	Peak
4		5875.000	53.34	6.65	59.99	-45.21	105.20	Peak
5		5925.000	52.78	7.73	60.51	-7.69	68.20	Peak
6	*	5941.598	56.64	7.10	63.74	-4.46	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

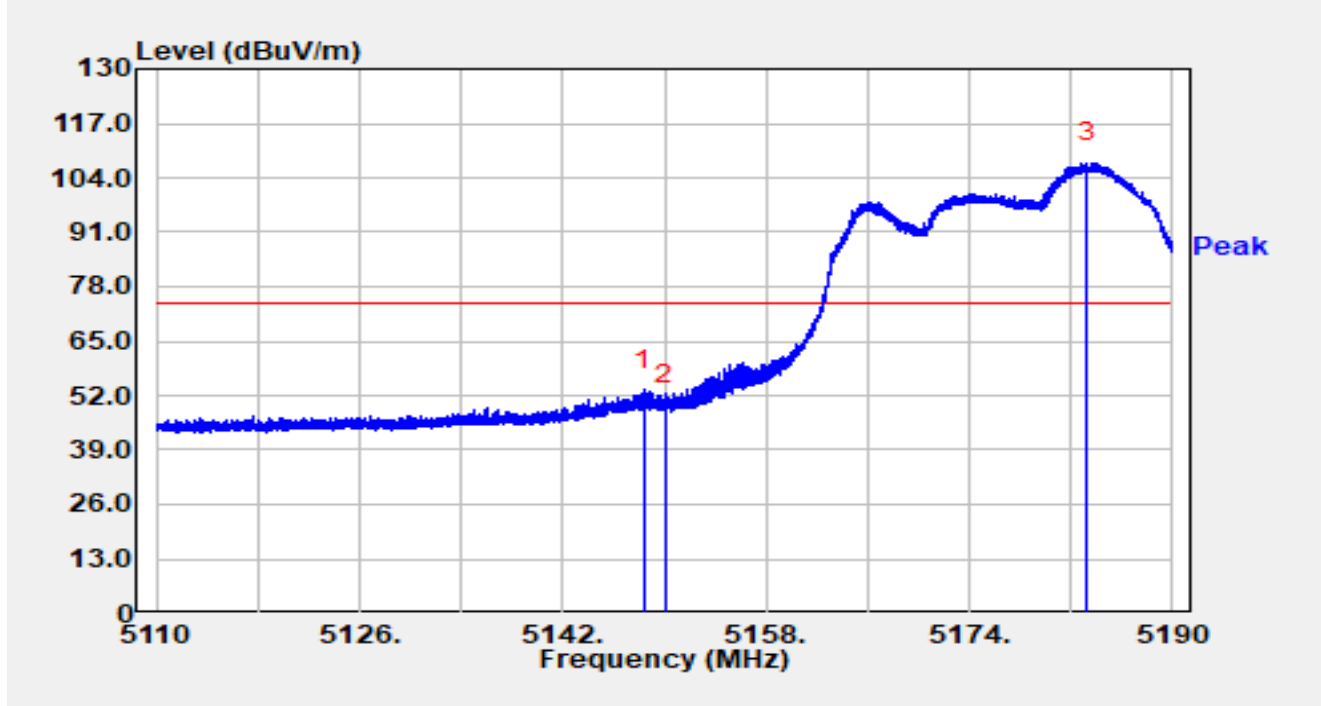


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.384	55.90	-2.52	53.37	-20.63	74.00	Peak
2		5150.000	51.97	-2.21	49.76	-24.24	74.00	Peak
3		5183.232	69.53	38.14	107.67	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

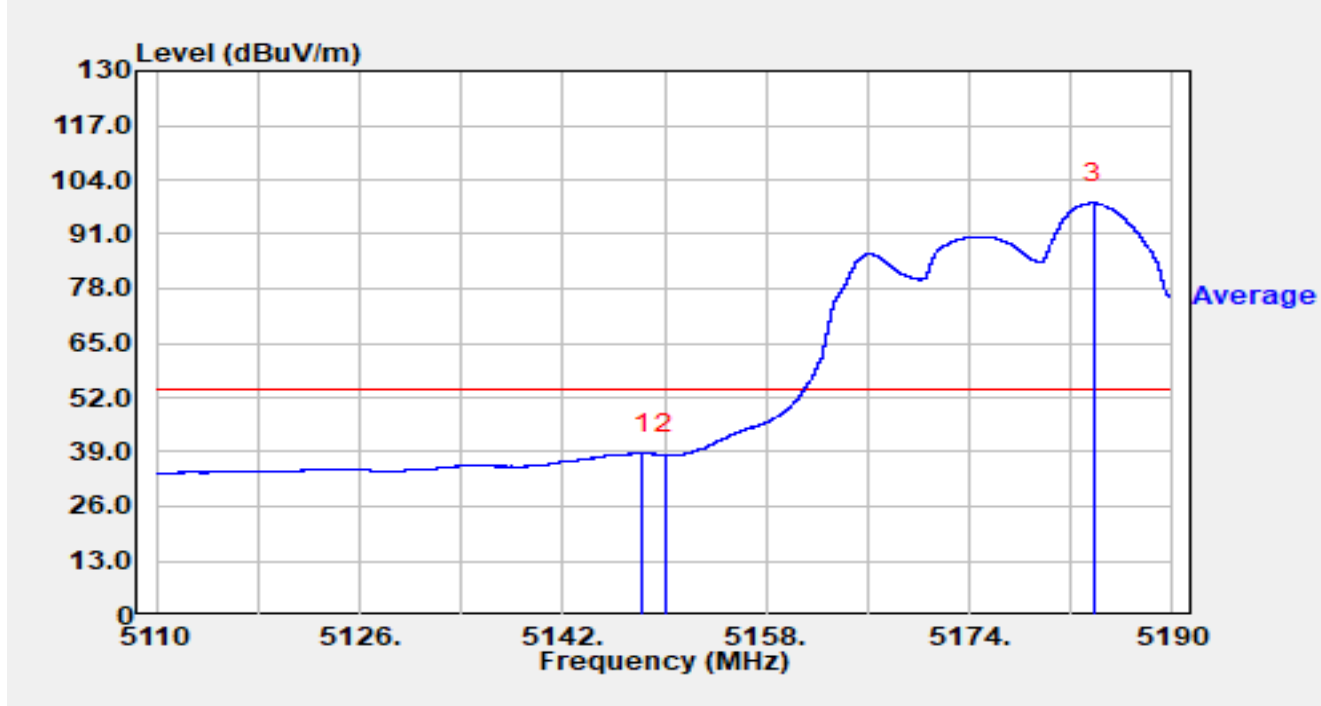


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.264	41.16	-2.54	38.62	-15.38	54.00	Average
2		5150.000	40.51	-2.21	38.30	-15.70	54.00	Average
3		5183.832	61.12	37.31	98.43	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

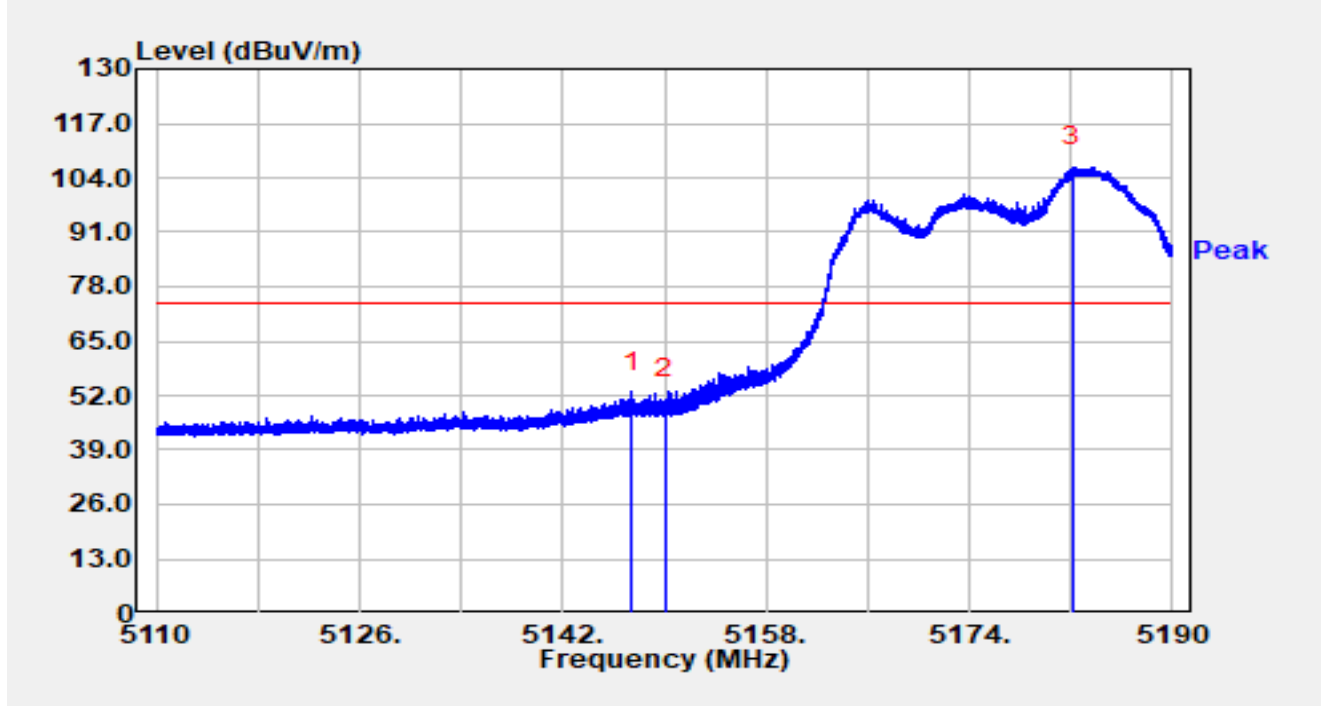


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.480	55.49	-2.71	52.78	-21.22	74.00	Peak
2		5150.000	53.24	-2.21	51.03	-22.97	74.00	Peak
3		5182.136	66.28	40.29	106.57	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

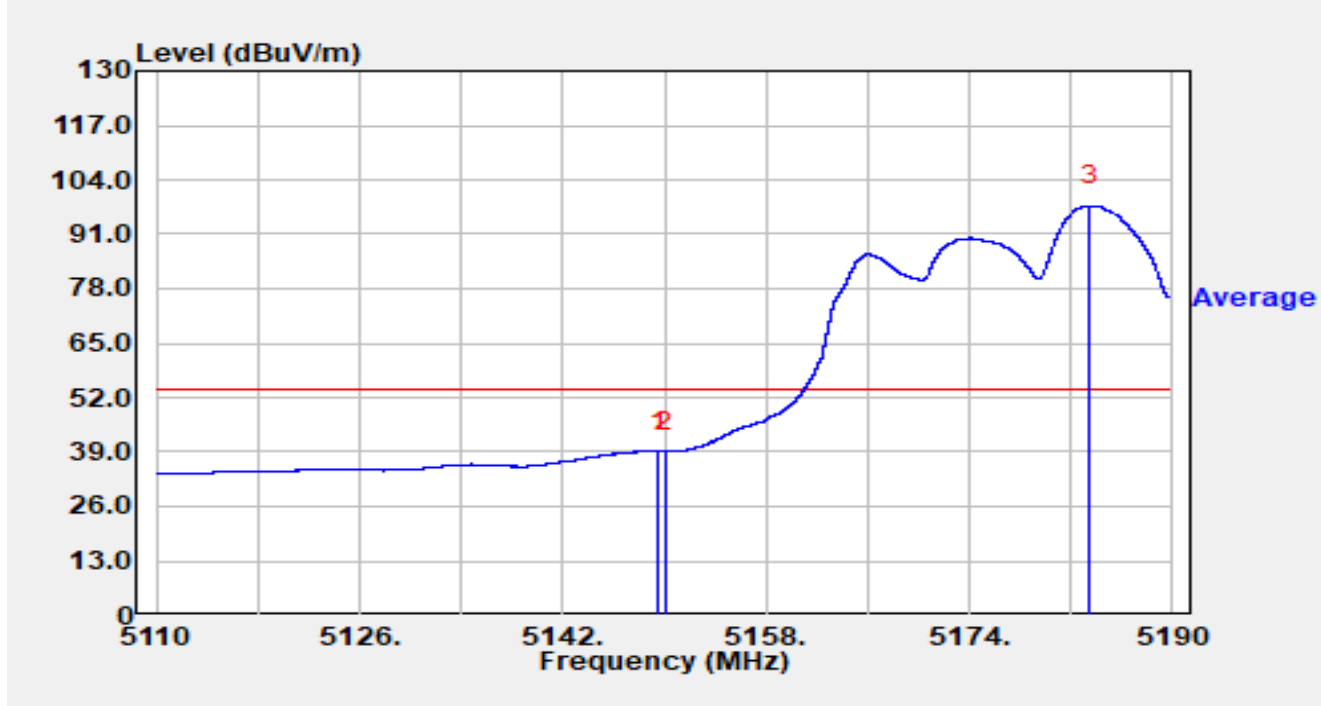


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.560	41.56	-2.32	39.24	-14.76	54.00	Average
2		5150.000	41.34	-2.21	39.13	-14.87	54.00	Average
3		5183.528	60.12	37.73	97.85	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

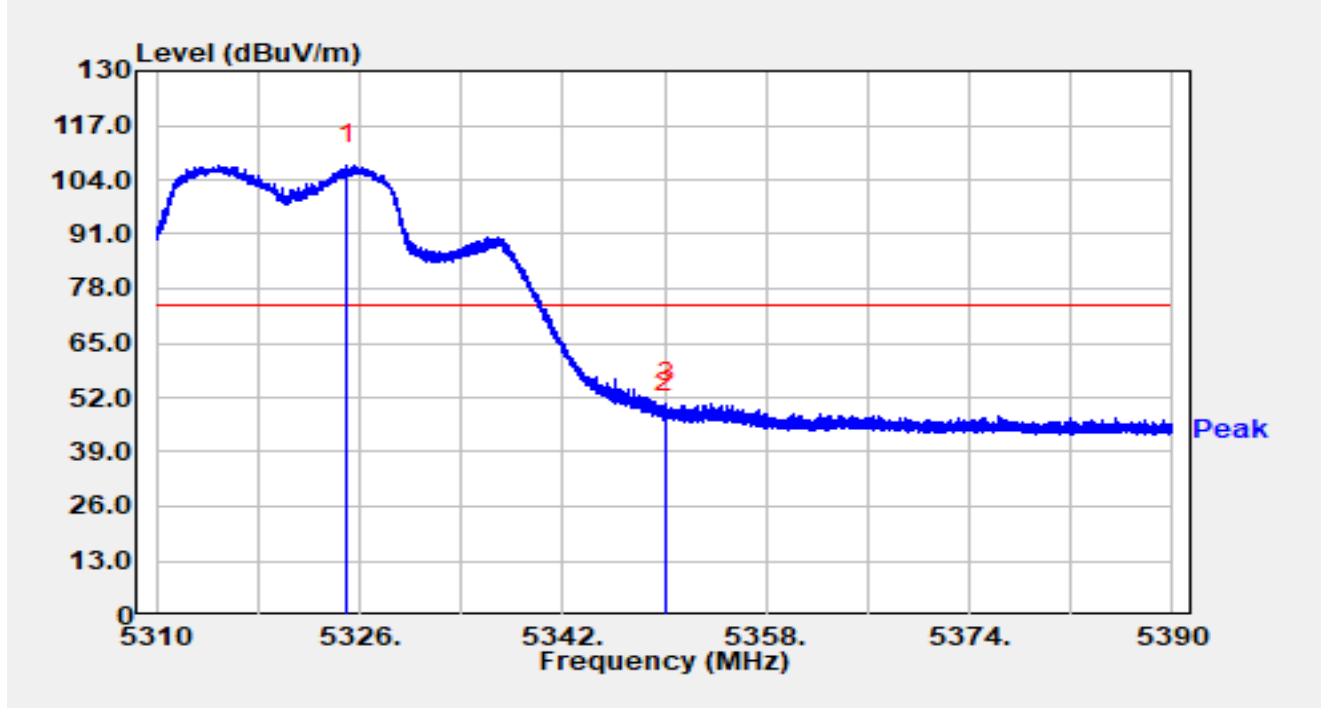


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.048	68.04	39.43	107.47	N/A	N/A	Peak
2		5350.000	49.90	-1.38	48.52	-25.48	74.00	Peak
3	*	5350.120	52.09	-1.44	50.65	-23.35	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

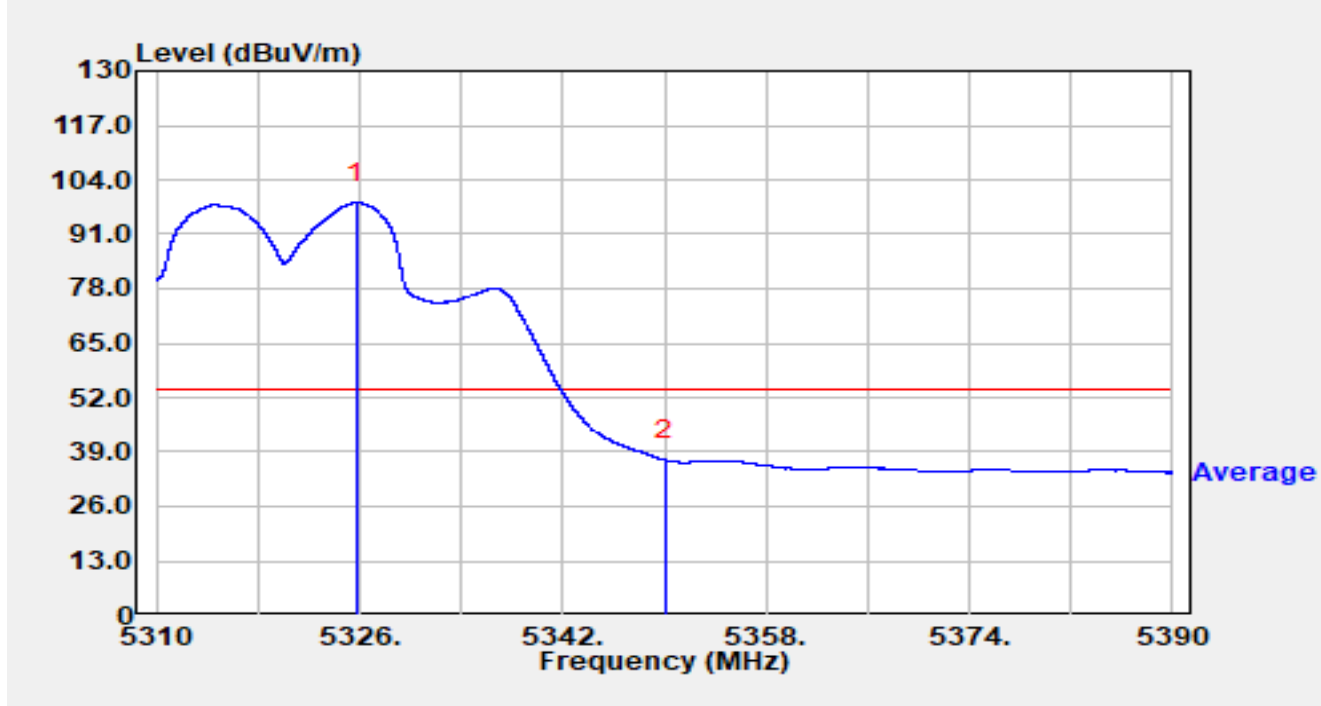


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.768	59.44	39.10	98.54	N/A	N/A	Average
2	*	5350.000	38.48	-1.38	37.10	-16.90	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

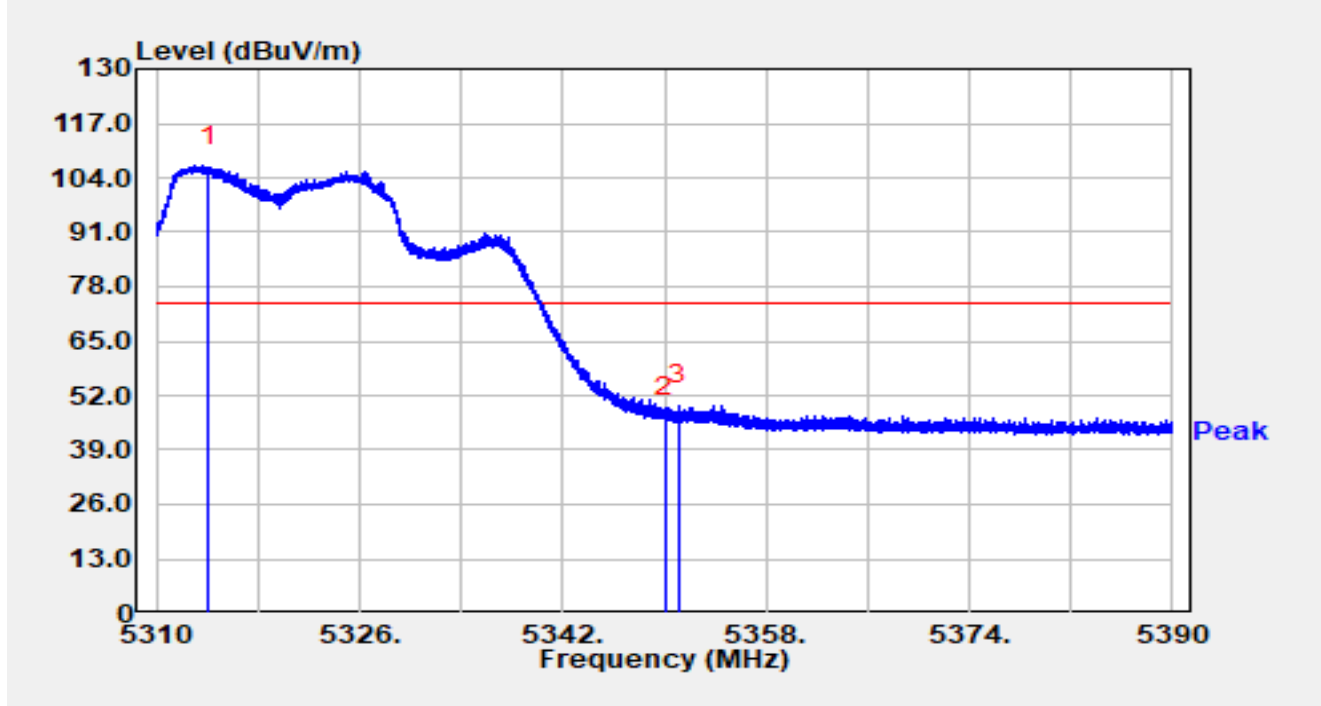


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.120	59.36	47.22	106.58	N/A	N/A	Peak
2		5350.000	48.18	-1.38	46.81	-27.19	74.00	Peak
3	*	5351.088	51.51	-1.93	49.58	-24.42	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

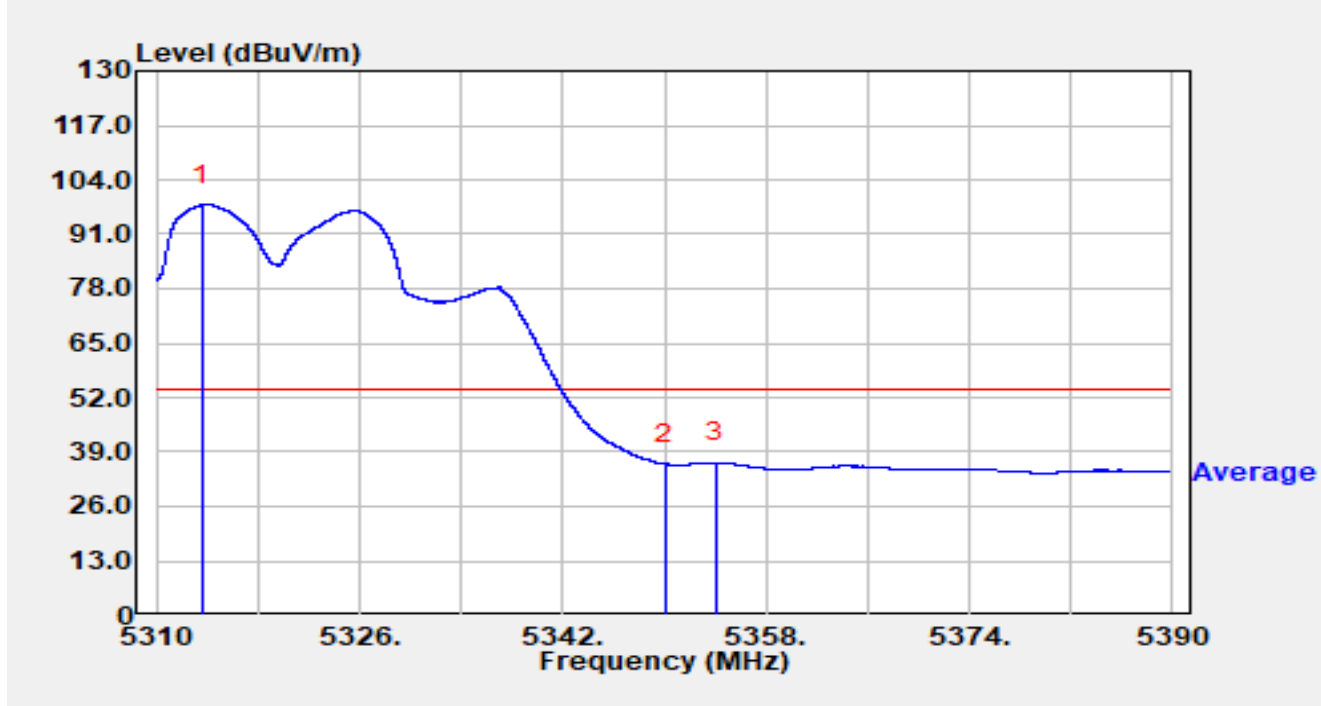


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.600	50.32	47.65	97.96	N/A	N/A	Average
2		5350.000	37.49	-1.38	36.11	-17.89	54.00	Average
3	*	5354.008	39.22	-2.84	36.38	-17.62	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

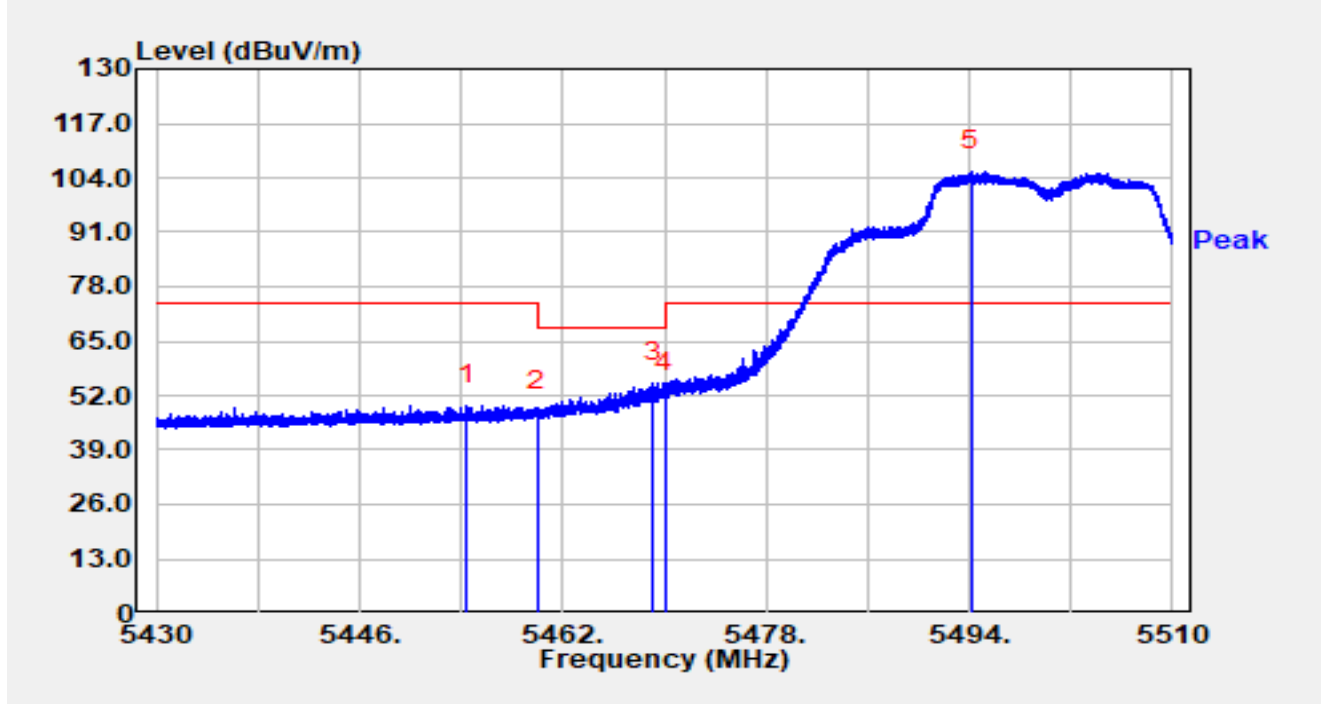


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.448	52.57	-2.97	49.60	-24.40	74.00	Peak
2		5460.000	50.70	-2.55	48.14	-20.06	68.20	Peak
3	*	5469.064	56.05	-1.06	54.99	-13.21	68.20	Peak
4		5470.000	53.66	-0.76	52.90	-15.30	68.20	Peak
5		5494.184	63.16	42.36	105.52	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

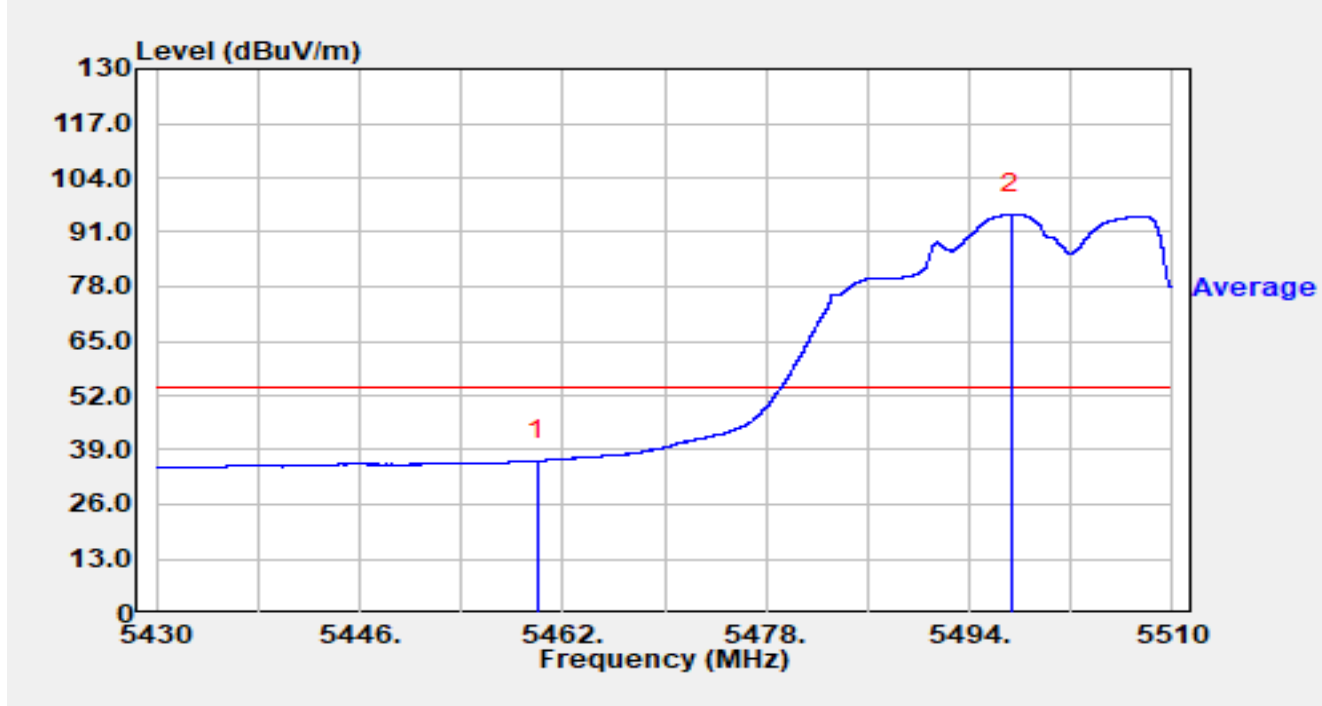


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	39.00	-2.55	36.44	-17.56	54.00	Average
2		5497.328	56.66	38.71	95.37	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

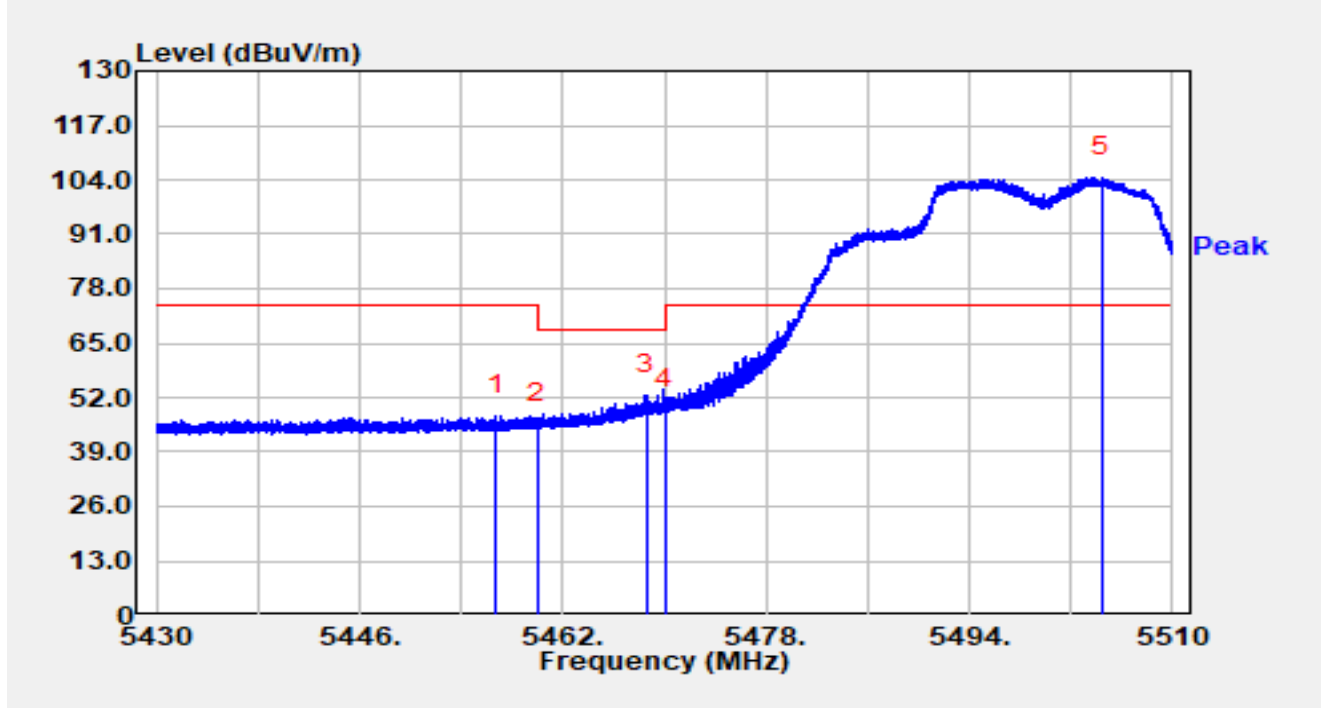


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.712	50.56	-2.84	47.72	-26.28	74.00	Peak
2		5460.000	48.48	-2.55	45.93	-22.27	68.20	Peak
3	*	5468.592	53.89	-1.23	52.66	-15.54	68.20	Peak
4		5470.000	50.21	-0.76	49.45	-18.75	68.20	Peak
5		5504.472	59.86	44.72	104.58	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

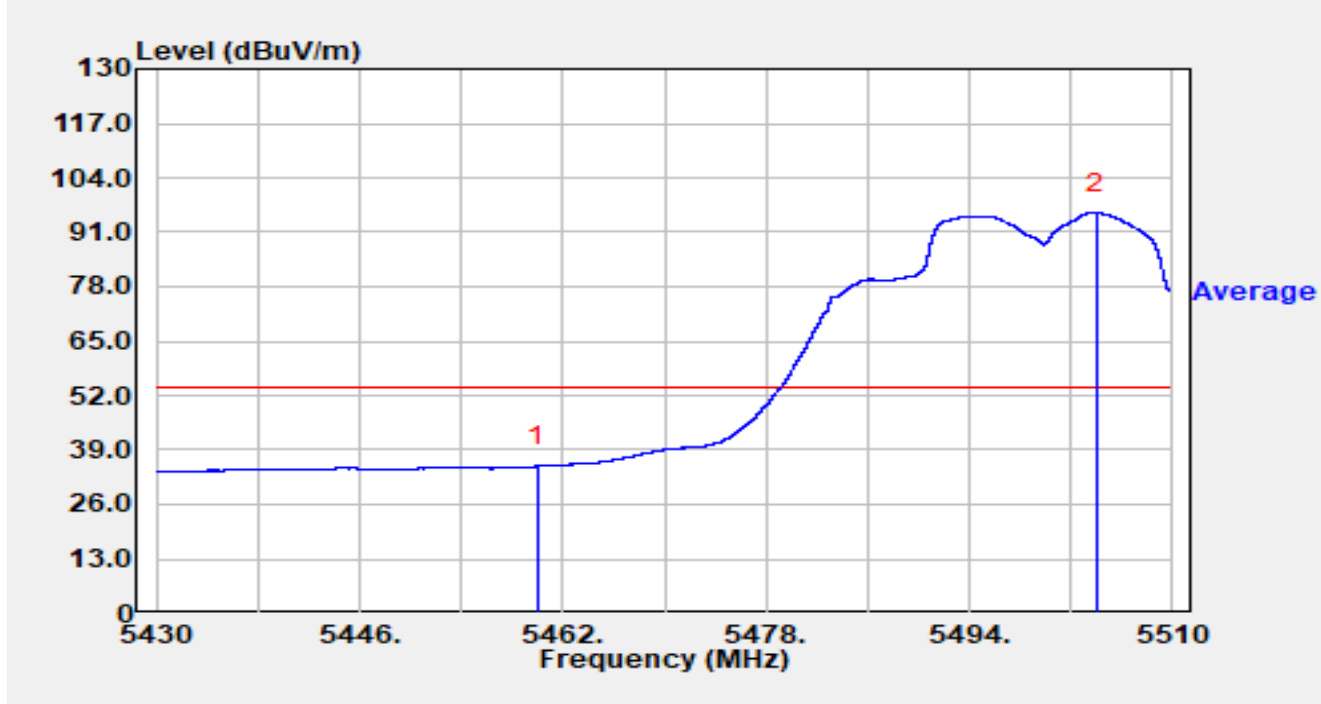


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	37.66	-2.55	35.10	-18.90	54.00	Average
2		5504.008	51.21	44.38	95.59	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

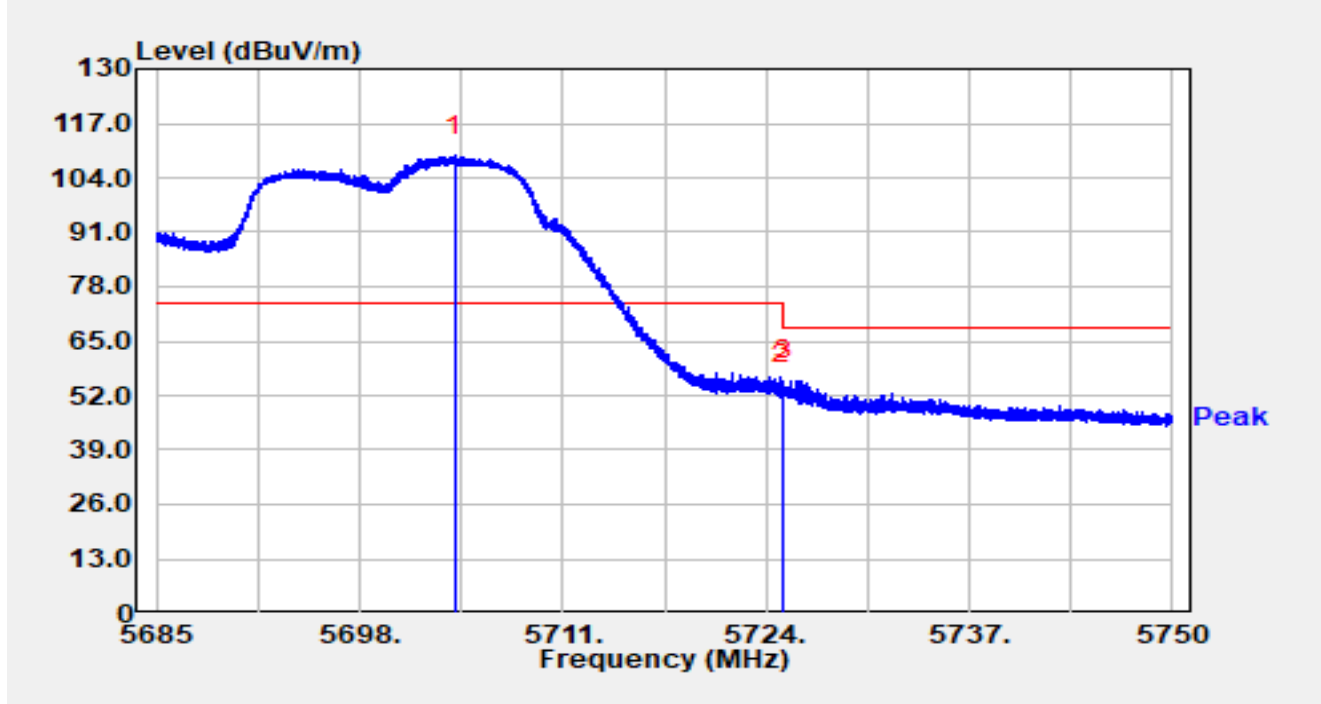


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.084	70.03	39.18	109.21	N/A	N/A	Peak
2		5725.000	55.48	-0.89	54.58	-13.62	68.20	Peak
3	*	5725.111	56.46	-0.96	55.50	-12.70	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

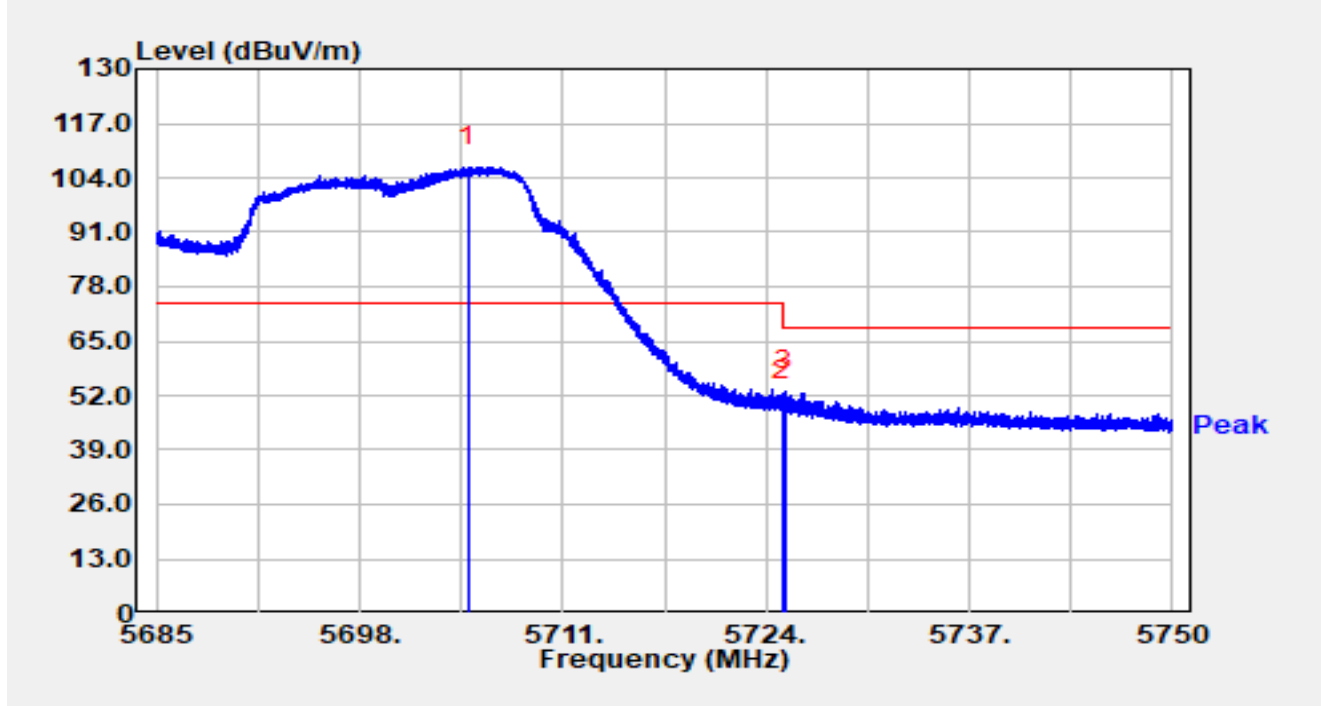


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.942	67.35	39.32	106.67	N/A	N/A	Peak
2		5725.000	51.87	-0.89	50.98	-17.22	68.20	Peak
3	*	5725.235	54.20	-1.03	53.17	-15.03	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

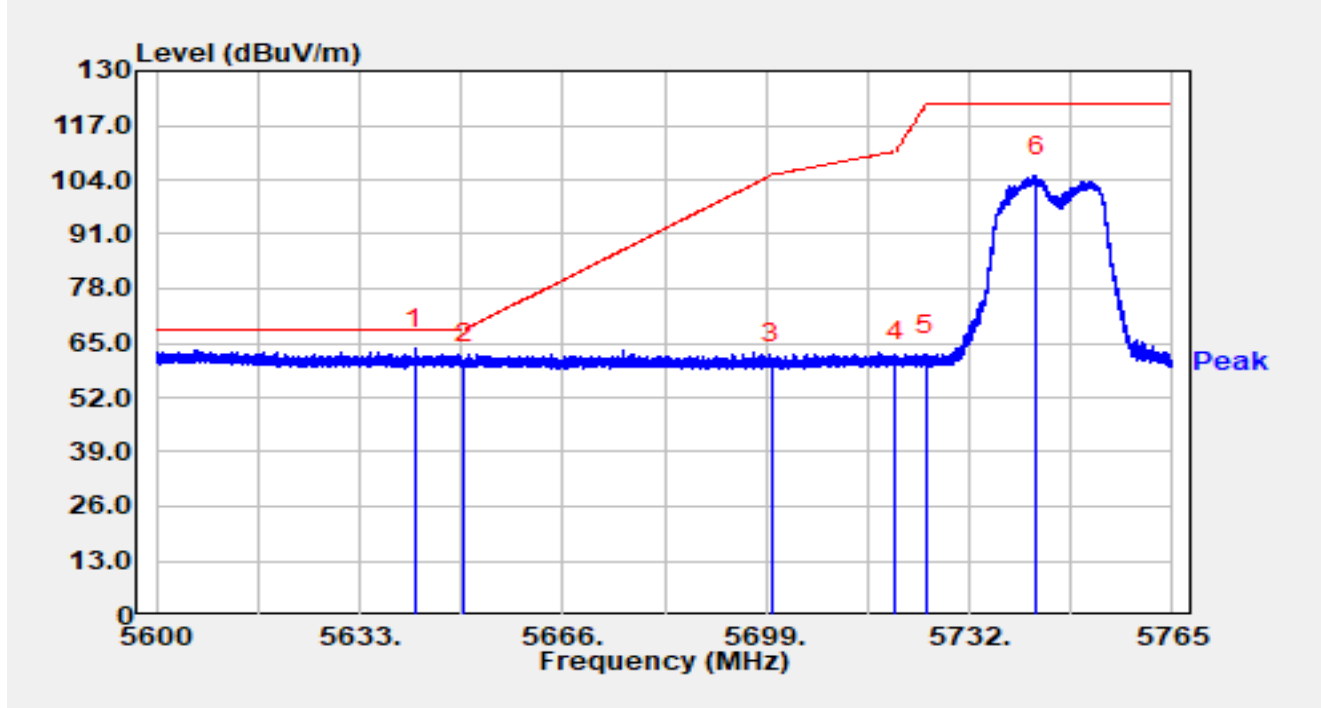


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.025	57.25	6.49	63.75	-4.45	68.20	Peak
2		5650.000	53.64	6.58	60.22	-7.98	68.20	Peak
3		5700.000	53.47	6.47	59.93	-45.27	105.20	Peak
4		5720.000	54.01	6.65	60.66	-50.14	110.80	Peak
5		5725.000	55.50	6.66	62.17	-60.03	122.20	Peak
6		5742.939	98.63	6.32	104.95	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

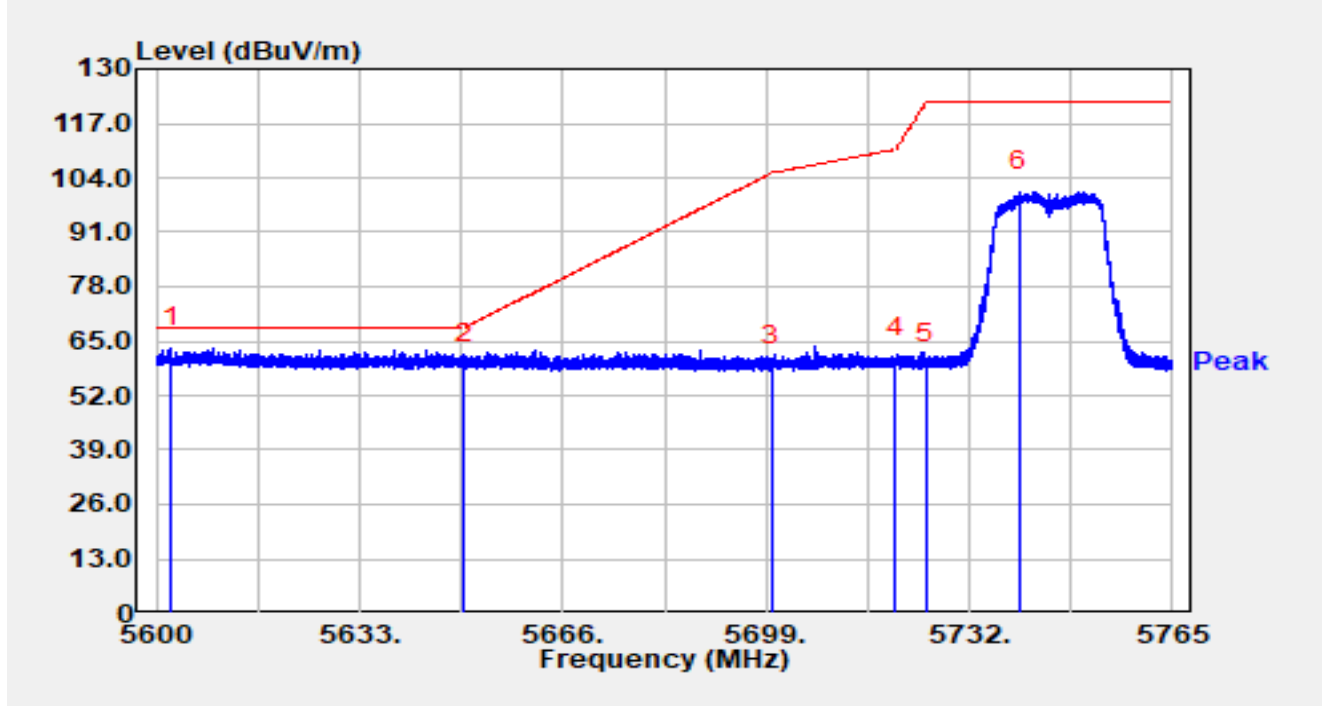


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5602.359	56.36	7.16	63.52	-4.68	68.20	Peak
2		5650.000	53.26	6.58	59.84	-8.36	68.20	Peak
3		5700.000	52.84	6.47	59.31	-45.89	105.20	Peak
4		5720.000	54.18	6.65	60.83	-49.97	110.80	Peak
5		5725.000	52.94	6.66	59.61	-62.59	122.20	Peak
6		5740.201	94.24	6.38	100.61	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

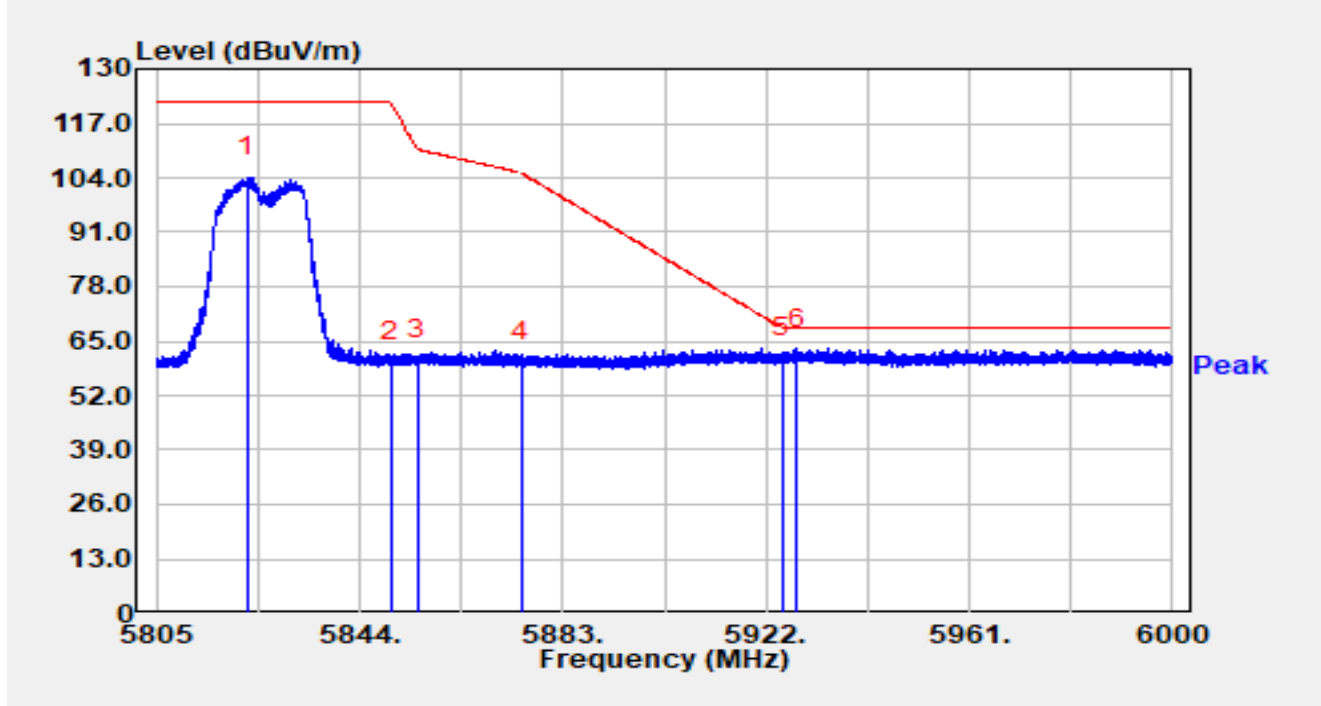


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.550	97.48	6.55	104.04	N/A	N/A	Peak
2		5850.000	53.11	6.85	59.96	-62.24	122.20	Peak
3		5855.000	53.67	6.91	60.58	-50.22	110.80	Peak
4		5875.000	53.32	6.65	59.97	-45.23	105.20	Peak
5		5925.000	53.17	7.73	60.89	-7.31	68.20	Peak
6	*	5927.947	55.37	7.82	63.19	-5.01	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

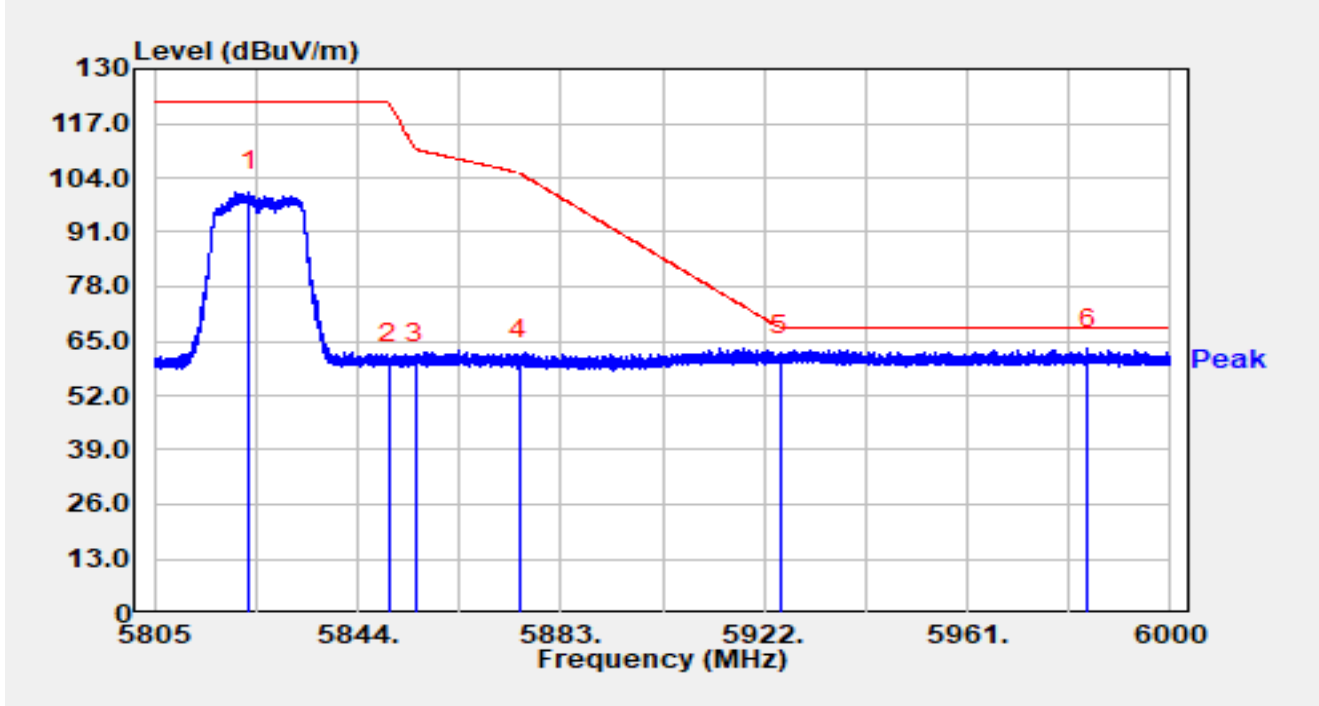


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.271	94.05	6.56	100.61	N/A	N/A	Peak
2		5850.000	52.91	6.85	59.76	-62.44	122.20	Peak
3		5855.000	52.72	6.91	59.64	-51.16	110.80	Peak
4		5875.000	53.97	6.65	60.63	-44.57	105.20	Peak
5		5925.000	53.92	7.73	61.65	-6.55	68.20	Peak
6	*	5984.010	55.90	7.16	63.06	-5.14	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

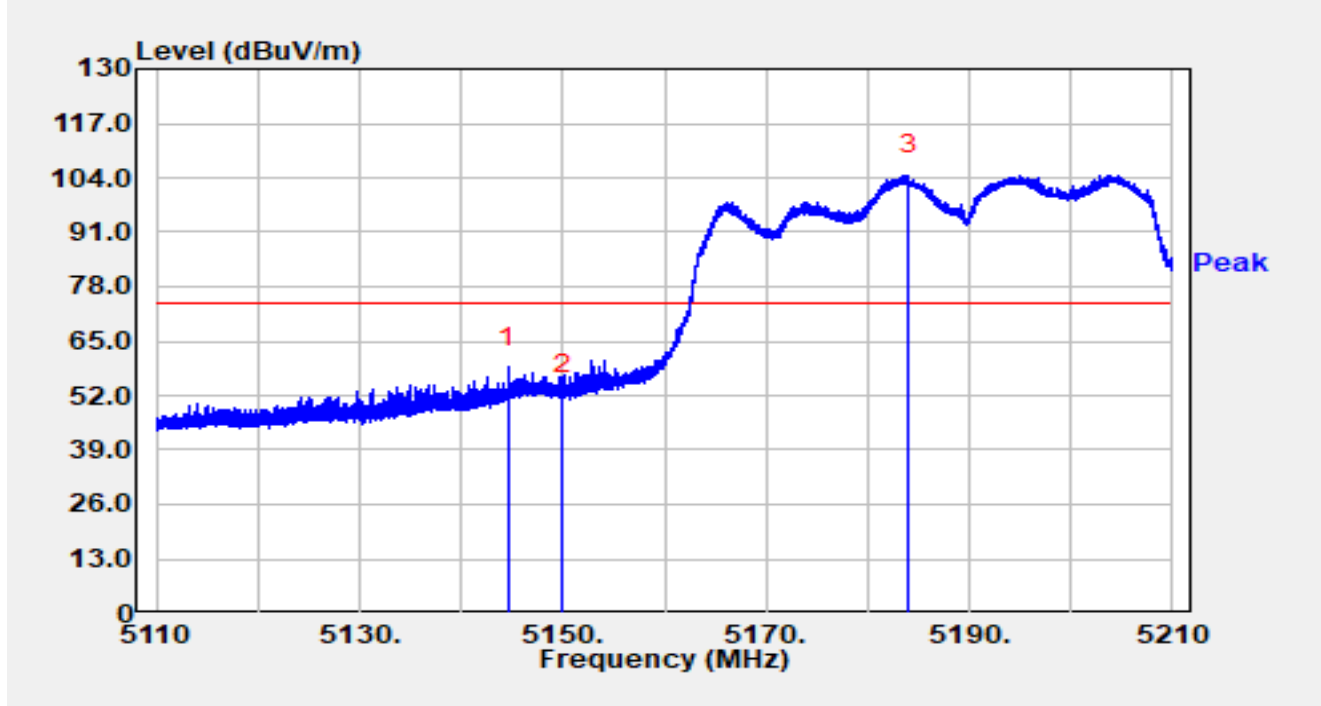


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.590	61.88	-3.09	58.79	-15.21	74.00	Peak
2		5150.000	54.41	-2.21	52.19	-21.81	74.00	Peak
3		5183.970	67.53	37.12	104.65	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

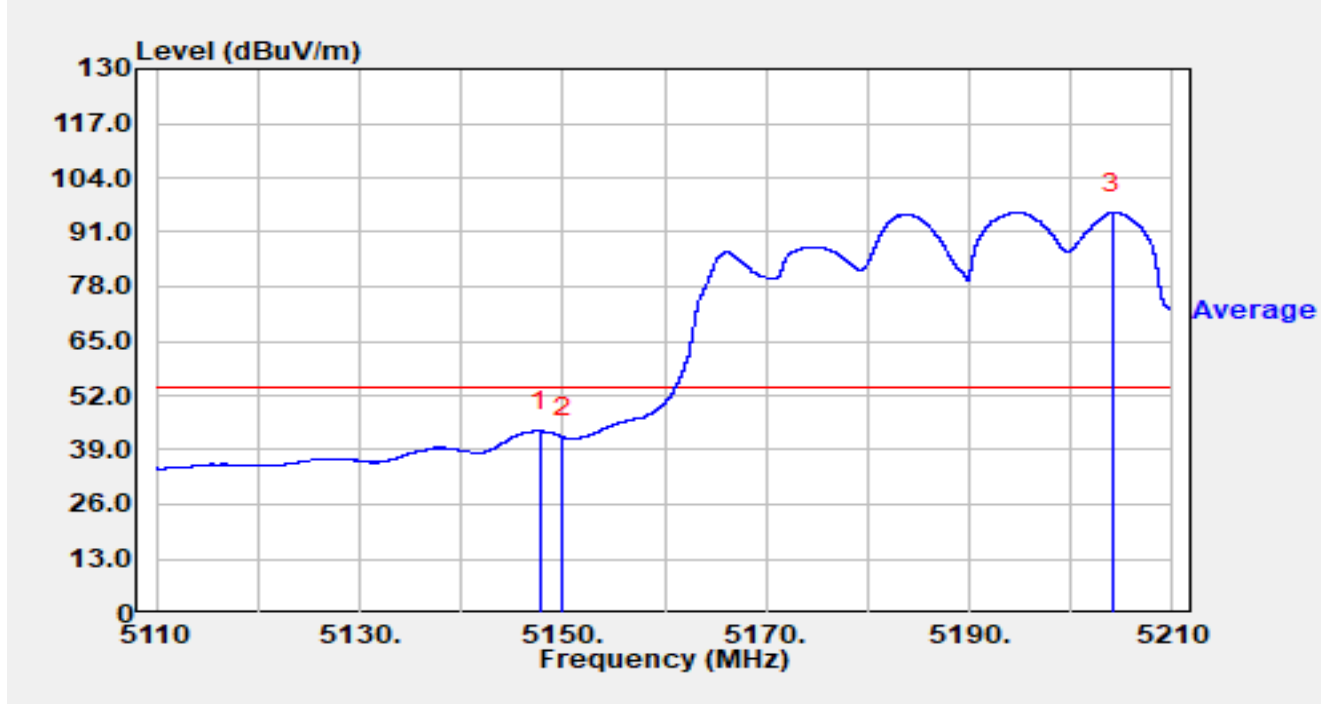


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.800	46.15	-2.64	43.52	-10.48	54.00	Average
2		5150.000	44.27	-2.21	42.06	-11.94	54.00	Average
3		5204.020	52.66	42.98	95.65	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

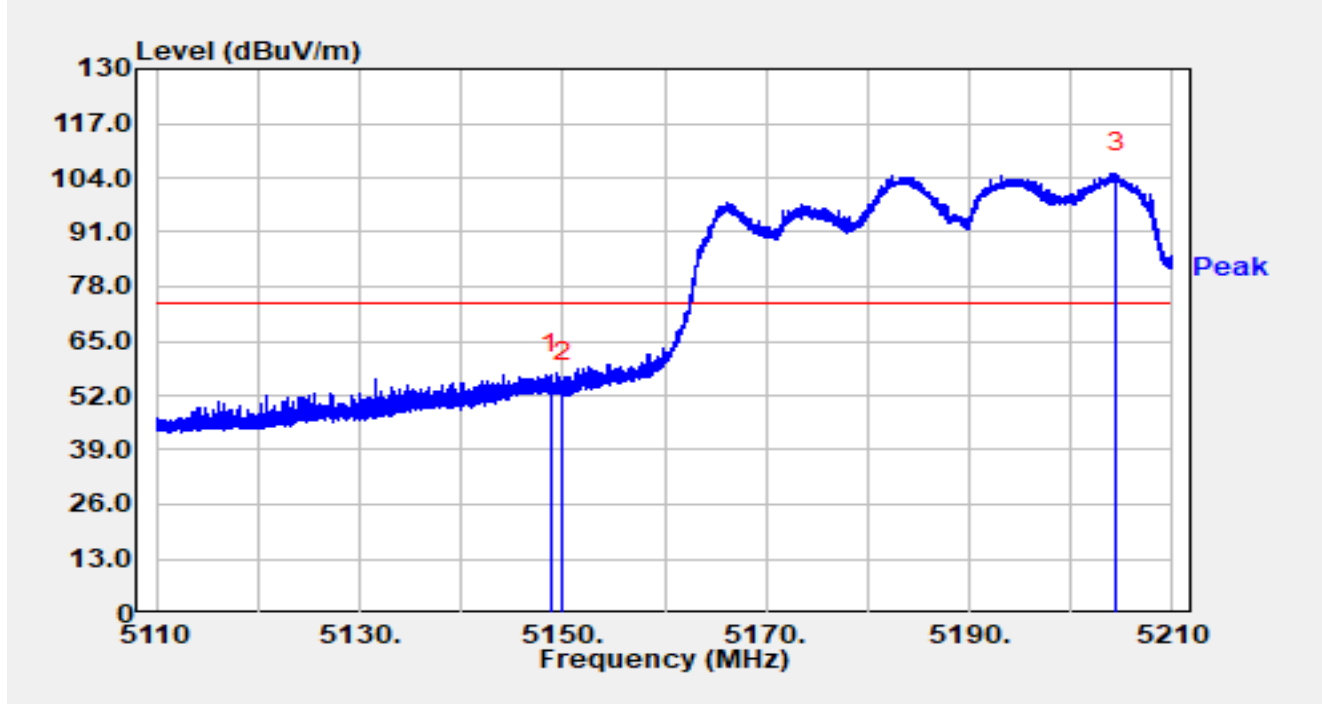


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.760	59.50	-2.45	57.05	-16.95	74.00	Peak
2		5150.000	57.59	-2.21	55.38	-18.62	74.00	Peak
3		5204.520	62.77	42.24	105.01	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

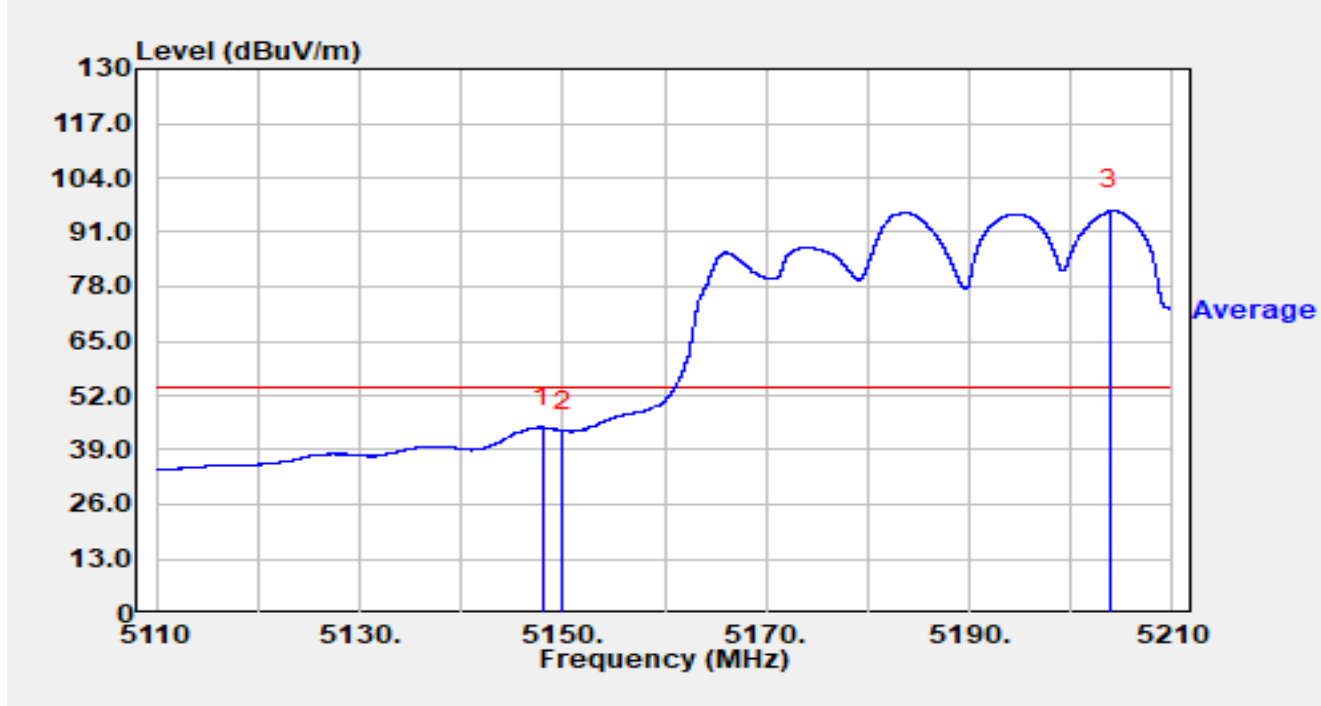


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.010	47.06	-2.59	44.47	-9.53	54.00	Average
2		5150.000	45.75	-2.21	43.54	-10.46	54.00	Average
3		5203.820	53.01	43.28	96.29	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

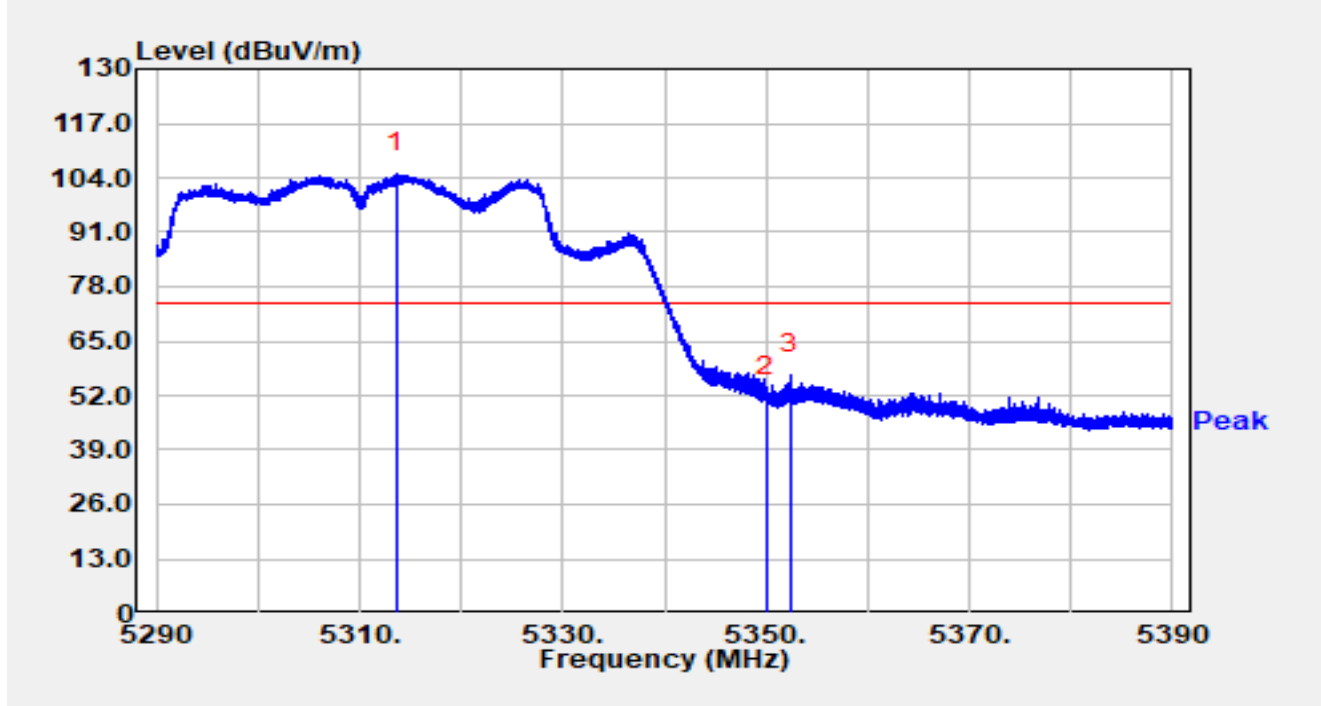


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.570	57.51	47.63	105.14	N/A	N/A	Peak
2		5350.000	53.05	-1.38	51.67	-22.33	74.00	Peak
3	*	5352.410	59.33	-2.37	56.96	-17.04	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

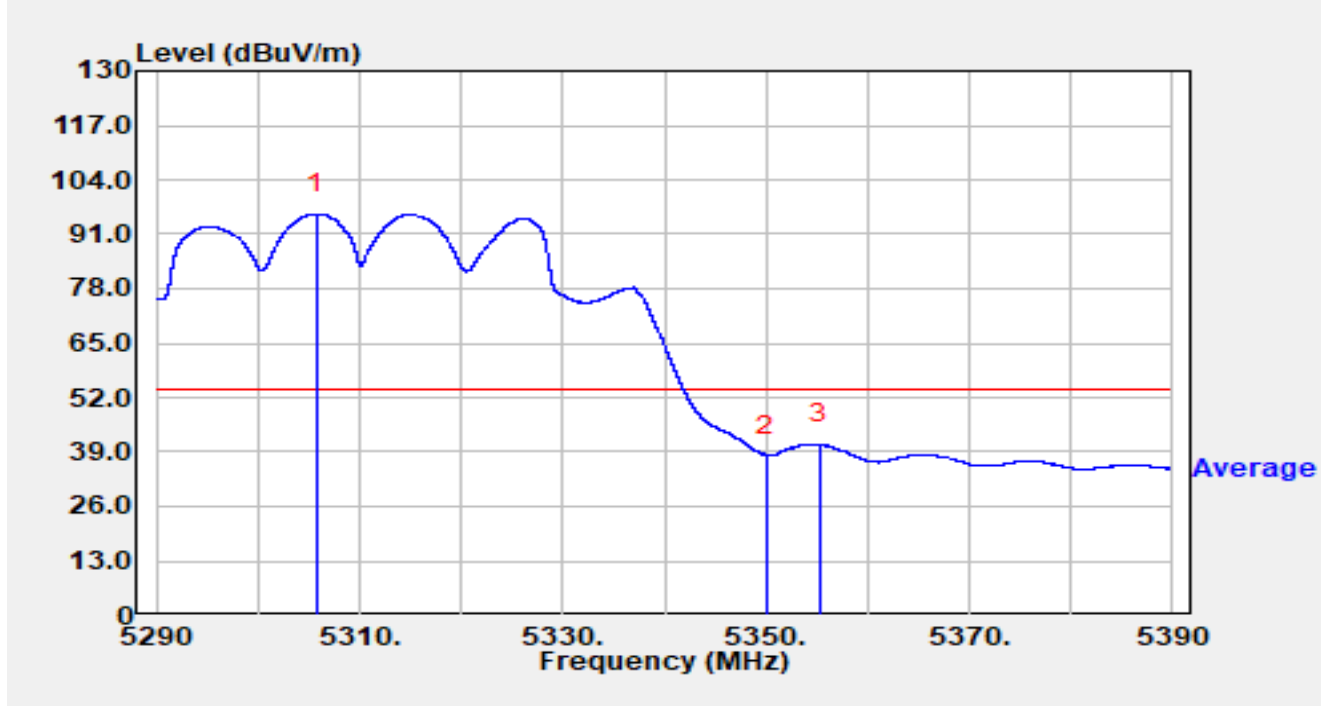


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5305.800	56.40	39.42	95.82	N/A	N/A	Average
2		5350.000	39.61	-1.38	38.23	-15.77	54.00	Average
3	*	5355.200	43.97	-3.03	40.94	-13.06	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

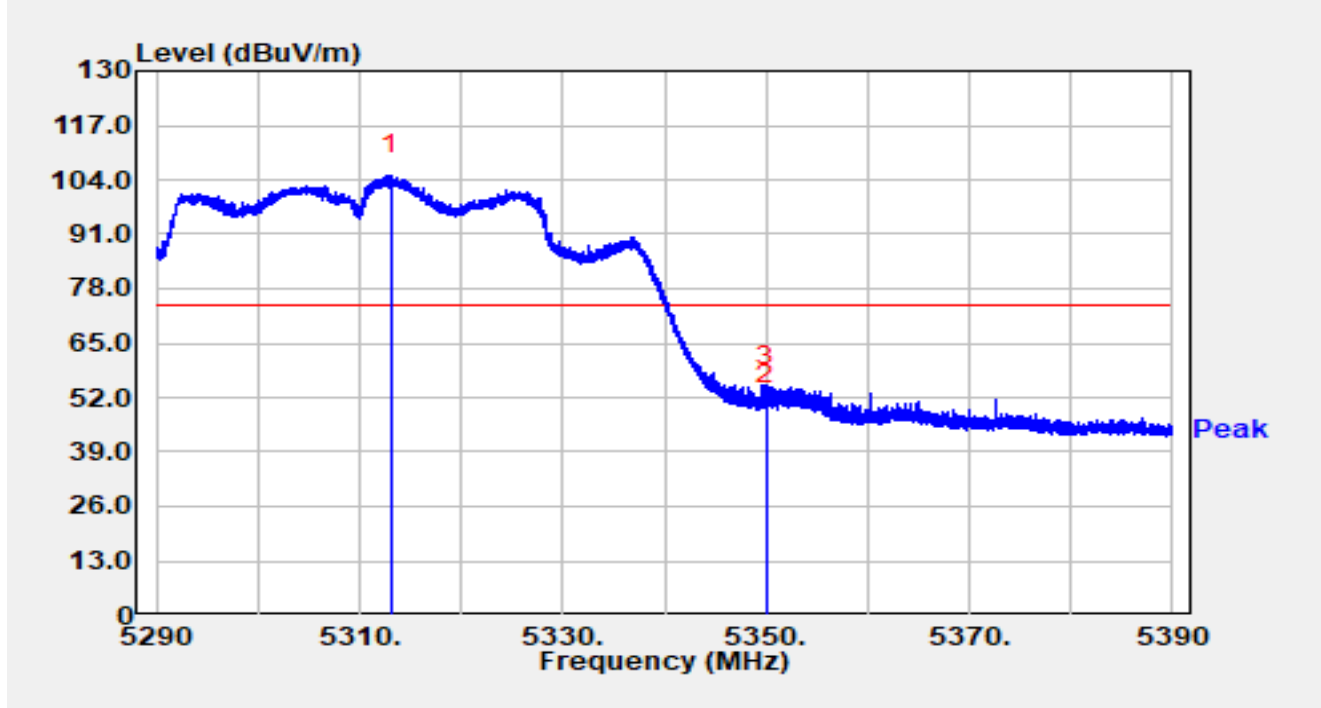


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.030	57.85	47.35	105.19	N/A	N/A	Peak
2		5350.000	51.87	-1.38	50.49	-23.51	74.00	Peak
3	*	5350.080	56.19	-1.42	54.76	-19.24	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

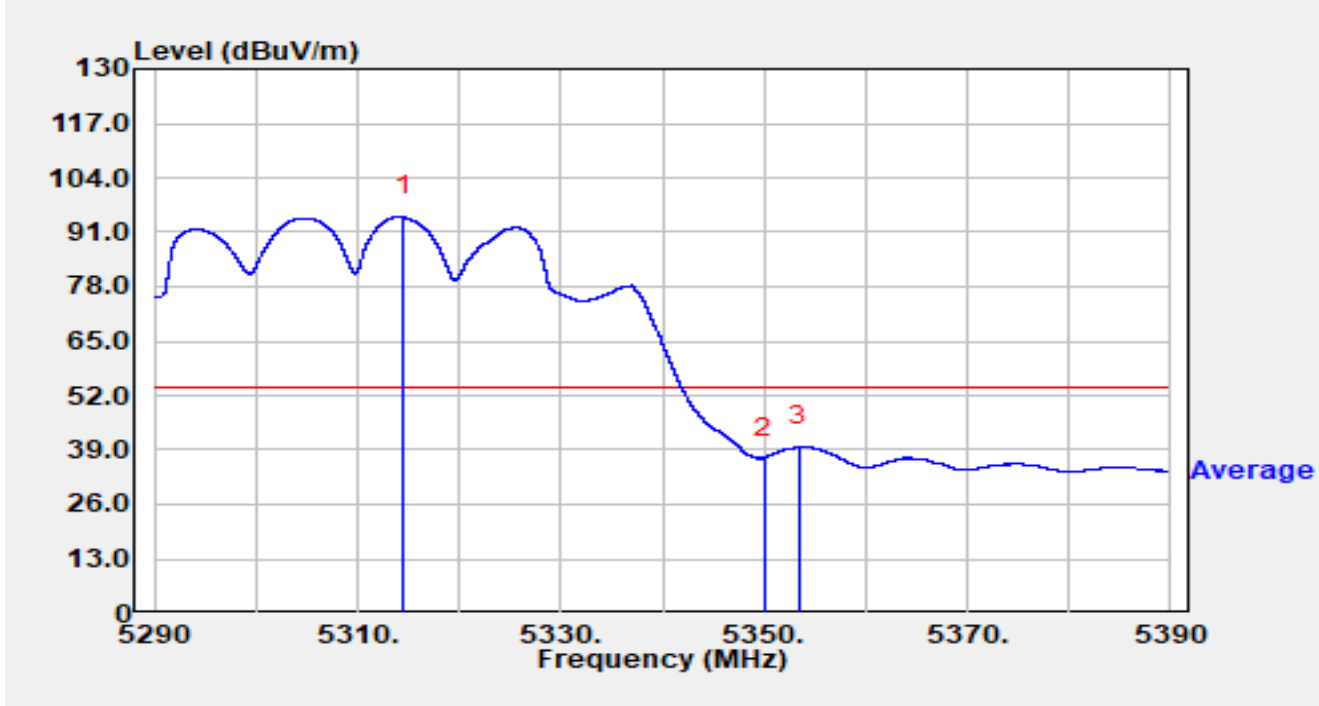


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.470	47.78	46.93	94.71	N/A	N/A	Average
2		5350.000	38.55	-1.38	37.17	-16.83	54.00	Average
3	*	5353.470	42.57	-2.70	39.88	-14.12	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

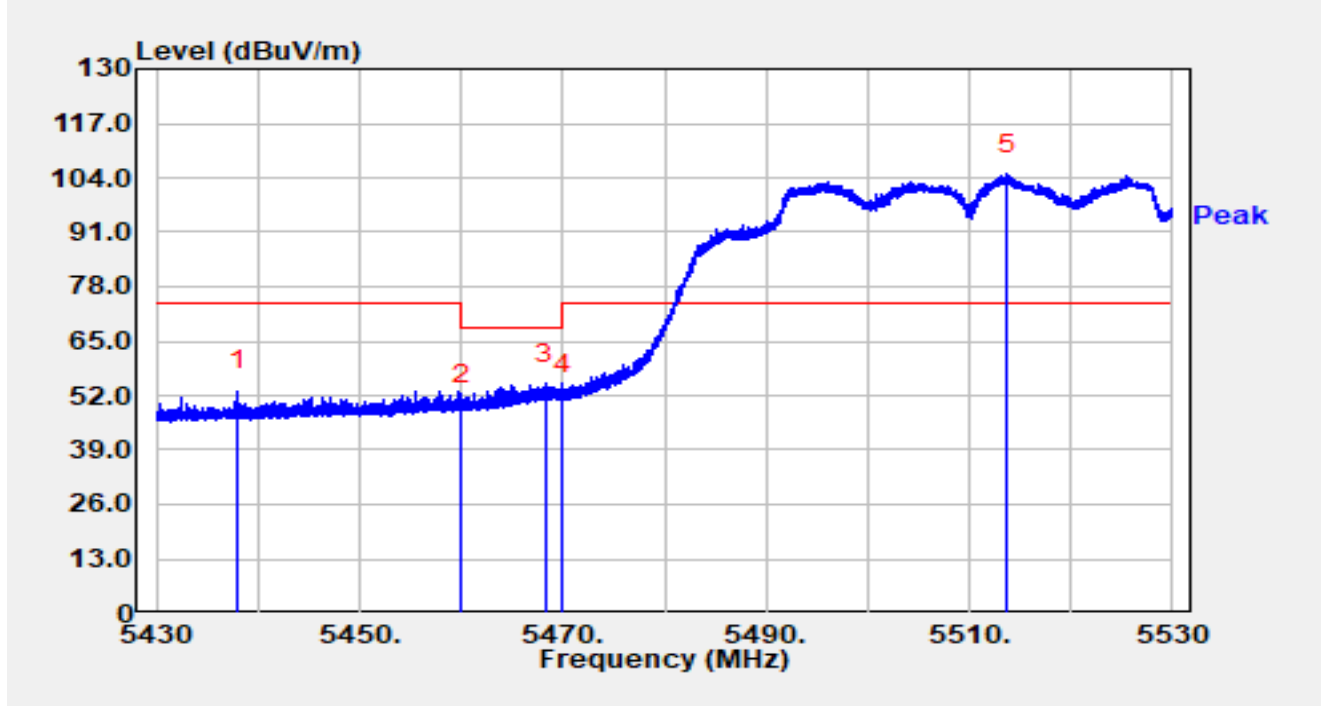


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5437.970	56.82	-3.61	53.21	-20.79	74.00	Peak
2		5460.000	52.14	-2.55	49.59	-18.61	68.20	Peak
3	*	5468.230	56.23	-1.34	54.89	-13.31	68.20	Peak
4		5470.000	53.02	-0.76	52.26	-15.94	68.20	Peak
5		5513.780	61.72	43.03	104.74	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

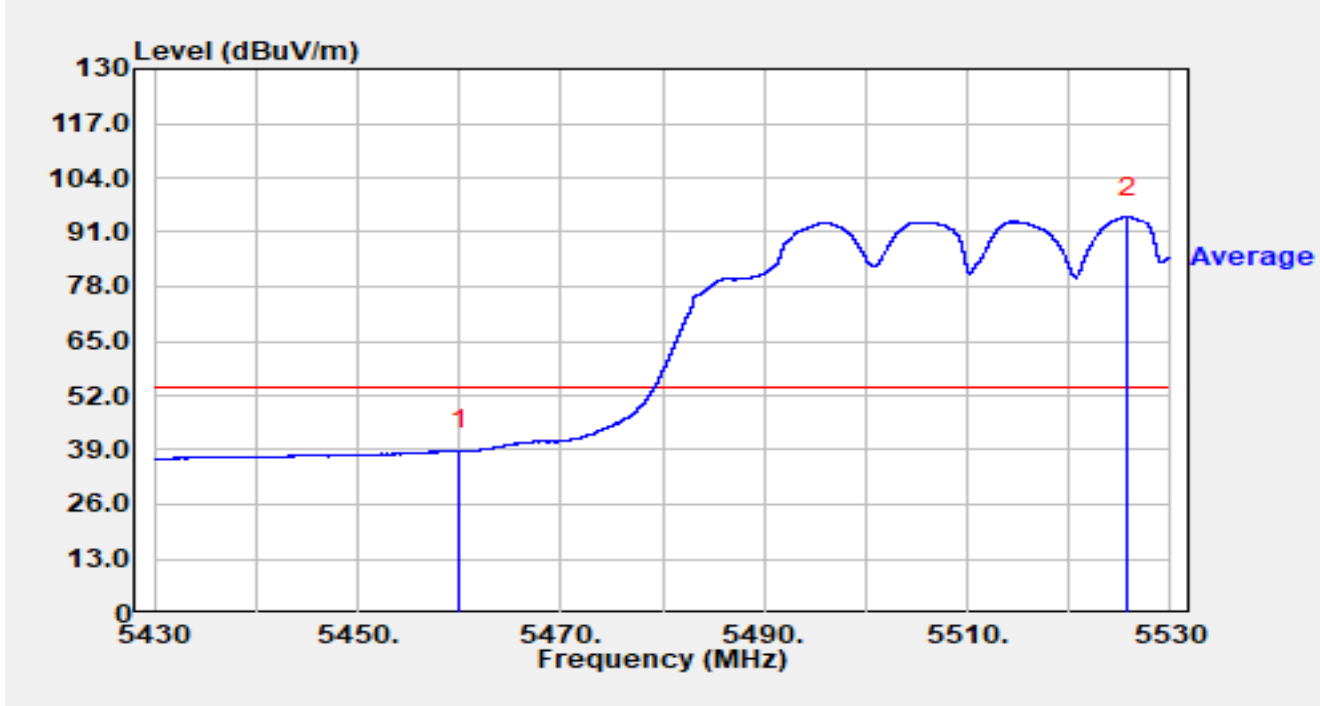


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	41.32	-2.55	38.77	-15.23	54.00	Average
2		5525.740	52.85	41.79	94.64	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

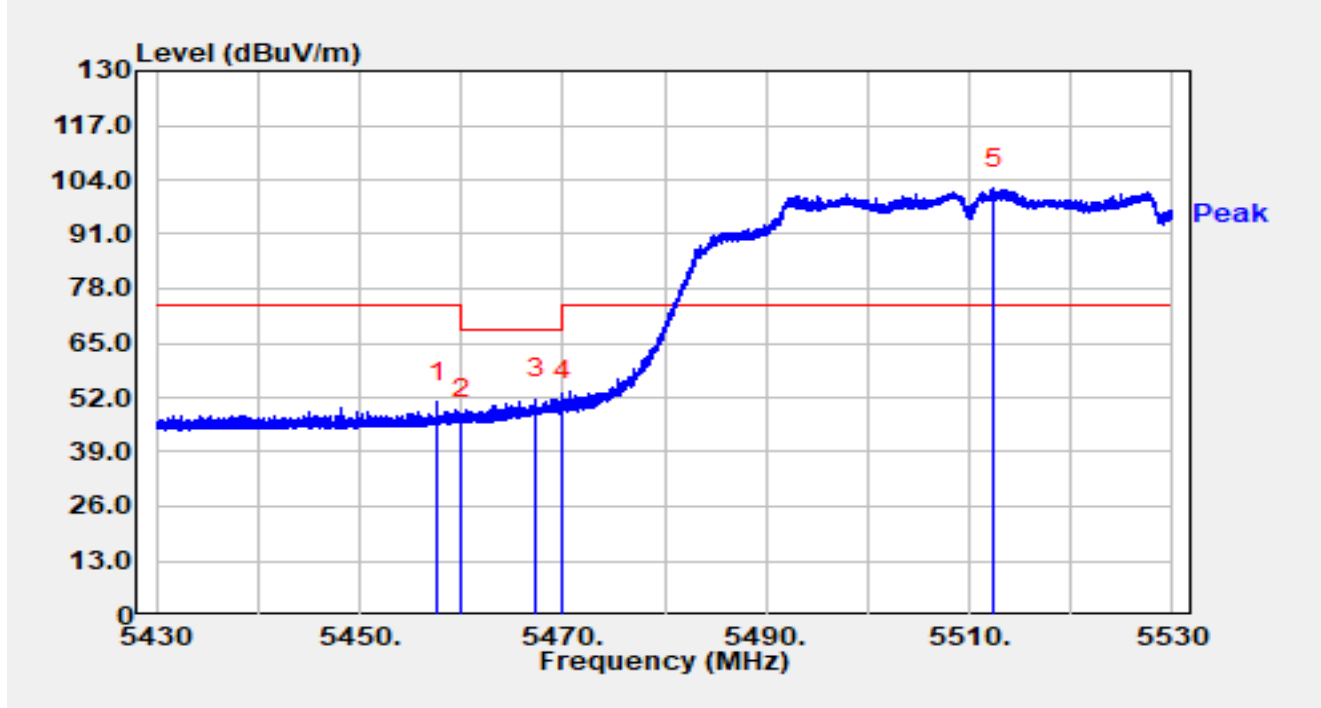


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.660	53.66	-2.79	50.87	-23.13	74.00	Peak
2		5460.000	49.54	-2.55	46.98	-21.22	68.20	Peak
3	*	5467.340	53.22	-1.59	51.63	-16.57	68.20	Peak
4		5470.000	51.95	-0.76	51.19	-17.01	68.20	Peak
5		5512.460	60.34	41.52	101.86	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

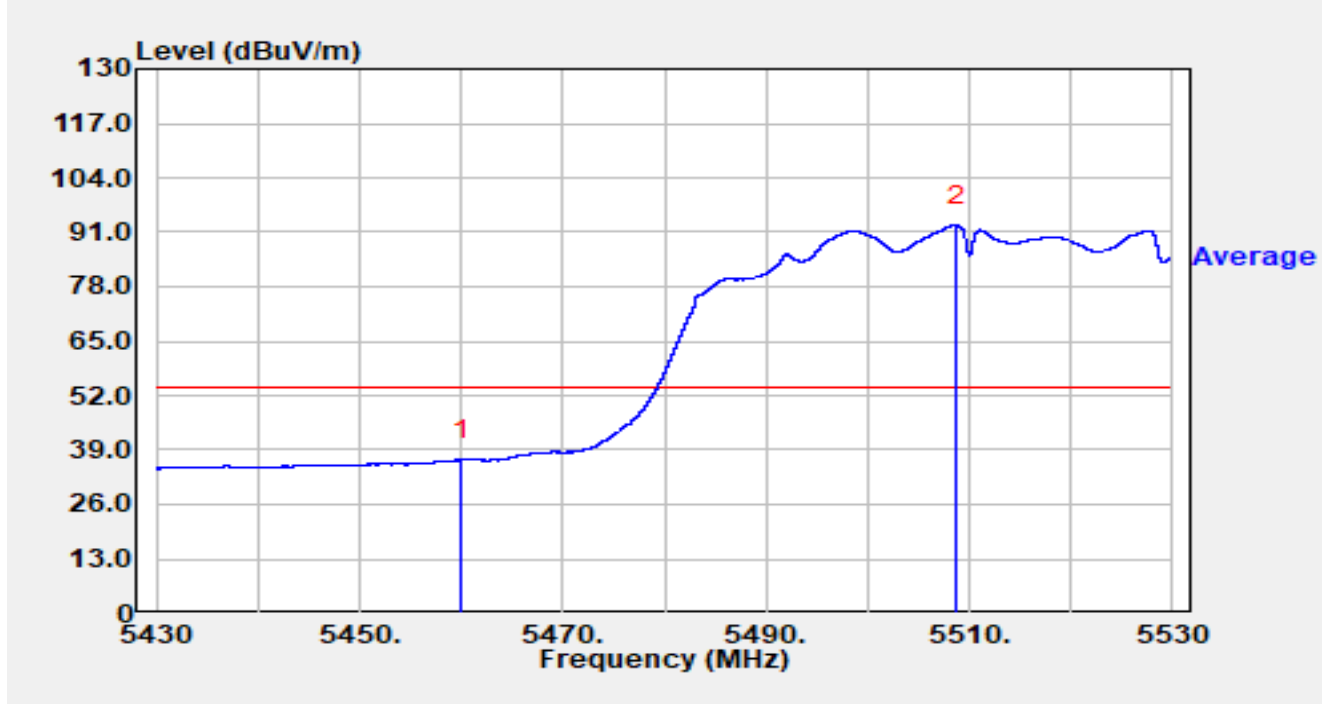


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	39.22	-2.55	36.67	-17.33	54.00	Average
2		5508.740	52.48	40.18	92.65	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

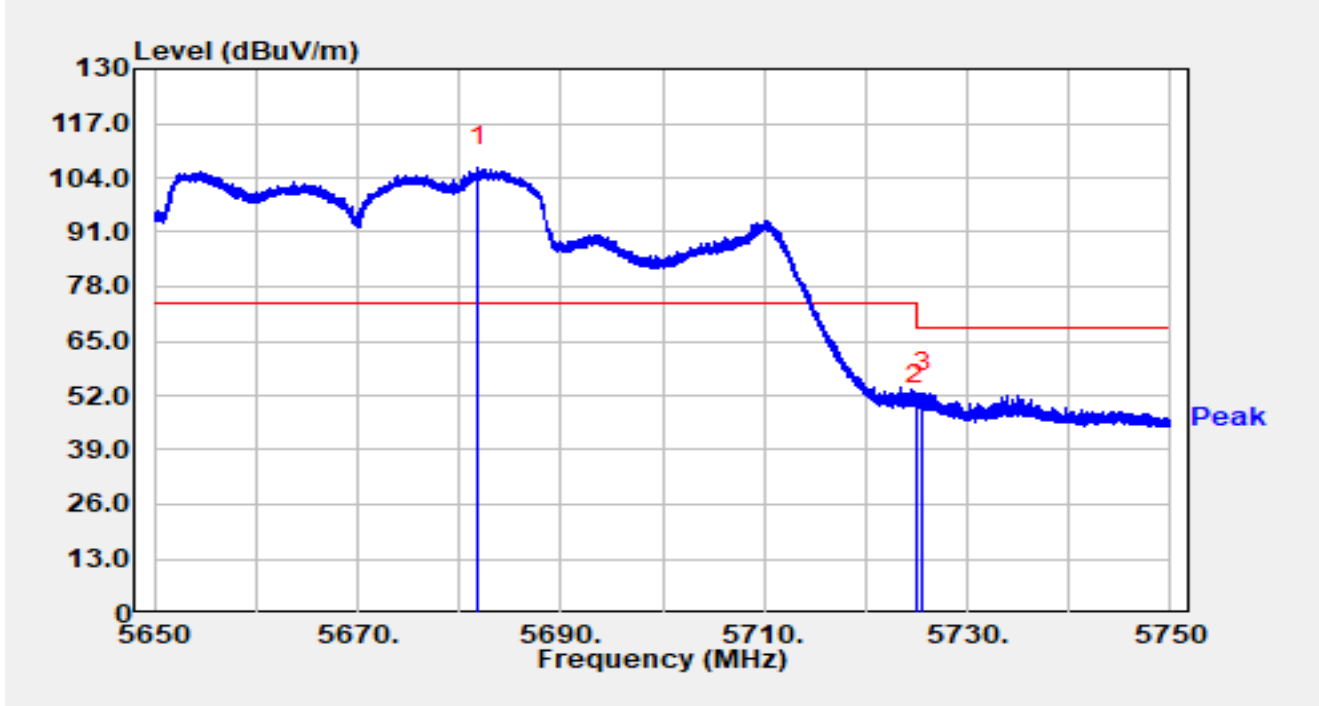


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5681.850	60.63	45.90	106.53	N/A	N/A	Peak
2		5725.000	50.85	-0.89	49.95	-18.25	68.20	Peak
3	*	5725.600	53.89	-1.22	52.67	-15.53	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

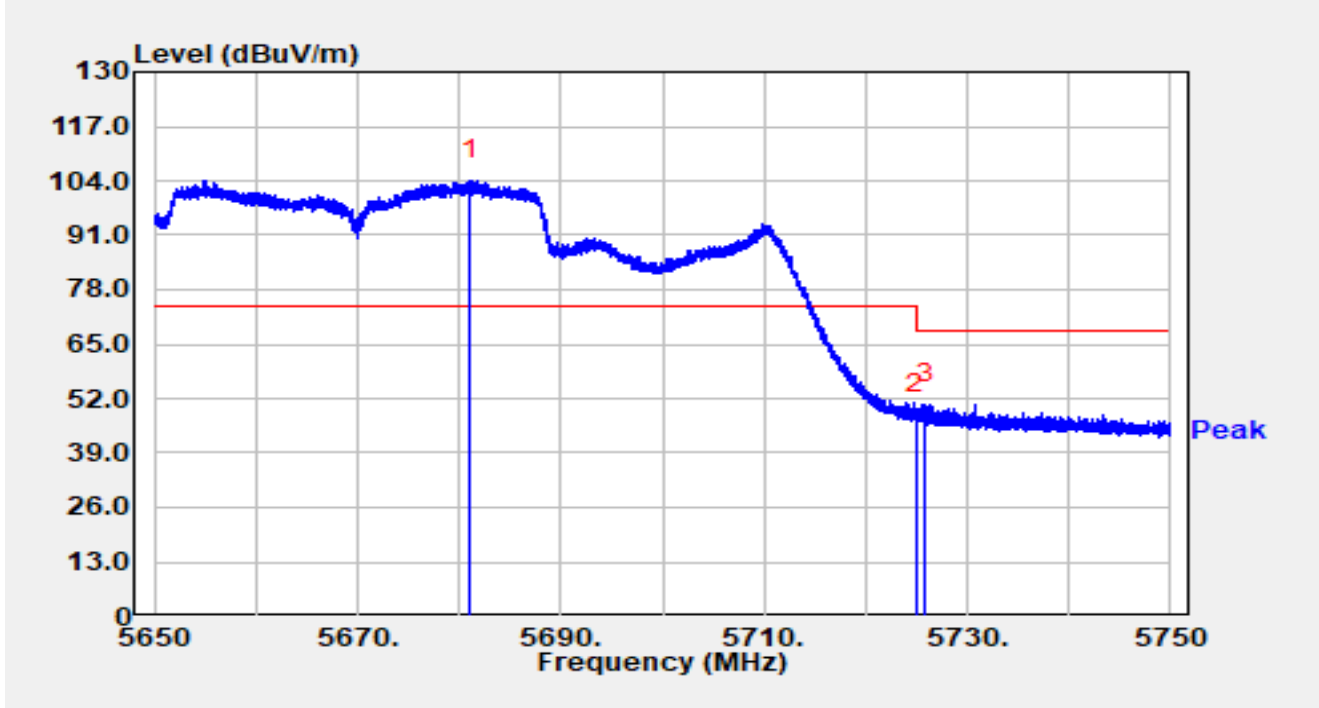


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5681.060	58.58	45.54	104.12	N/A	N/A	Peak
2		5725.000	49.05	-0.89	48.15	-20.05	68.20	Peak
3	*	5725.900	52.00	-1.40	50.61	-17.59	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

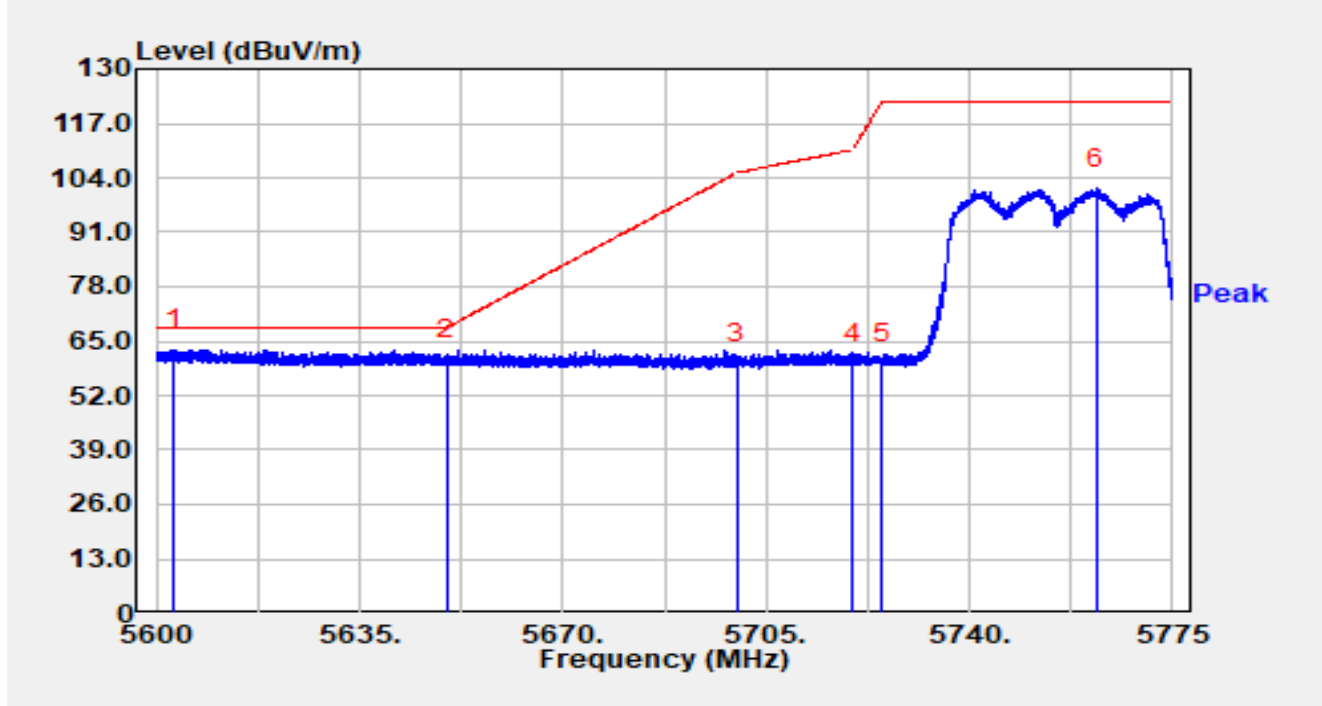


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5602.993	55.85	7.18	63.03	-5.17	68.20	Peak
2		5650.000	54.02	6.58	60.60	-7.60	68.20	Peak
3		5700.000	53.03	6.47	59.49	-45.71	105.20	Peak
4		5720.000	52.73	6.65	59.38	-51.42	110.80	Peak
5		5725.000	53.09	6.66	59.76	-62.44	122.20	Peak
6		5761.945	94.53	6.79	101.32	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

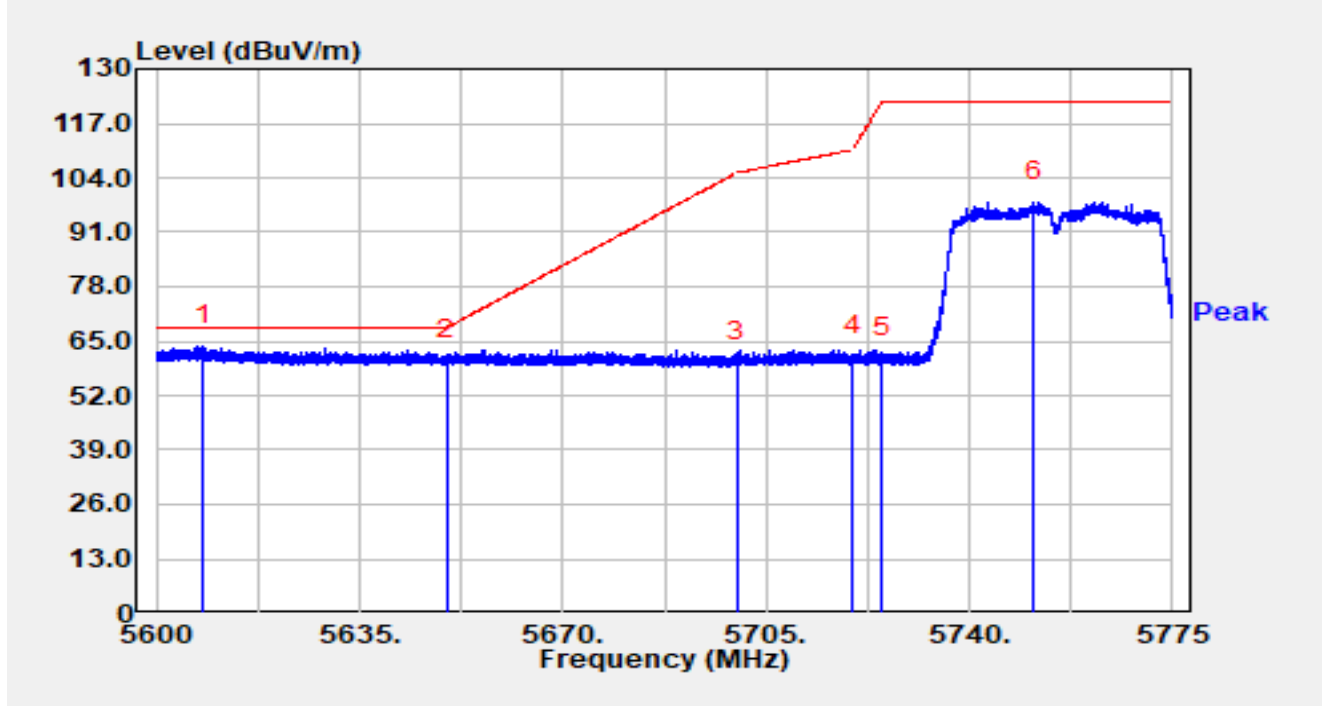


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.050	56.48	7.30	63.78	-4.42	68.20	Peak
2		5650.000	54.25	6.58	60.83	-7.37	68.20	Peak
3		5700.000	53.53	6.47	60.00	-45.20	105.20	Peak
4		5720.000	54.77	6.65	61.42	-49.38	110.80	Peak
5		5725.000	54.46	6.66	61.12	-61.08	122.20	Peak
6		5751.165	91.76	6.59	98.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

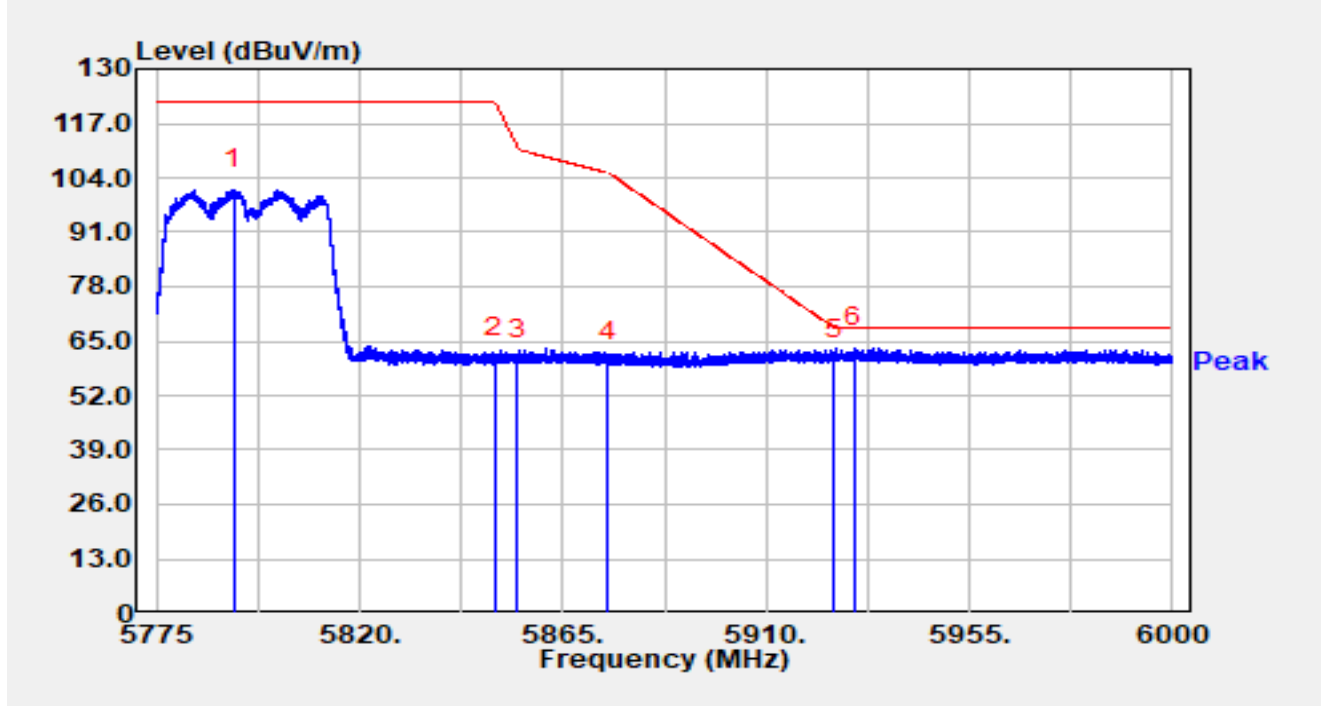


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5792.190	95.01	6.26	101.26	N/A	N/A	Peak
2		5850.000	54.22	6.85	61.08	-61.12	122.20	Peak
3		5855.000	53.89	6.91	60.80	-50.00	110.80	Peak
4		5875.000	53.29	6.65	59.95	-45.25	105.20	Peak
5		5925.000	52.73	7.73	60.46	-7.74	68.20	Peak
6	*	5929.530	55.66	7.87	63.52	-4.68	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

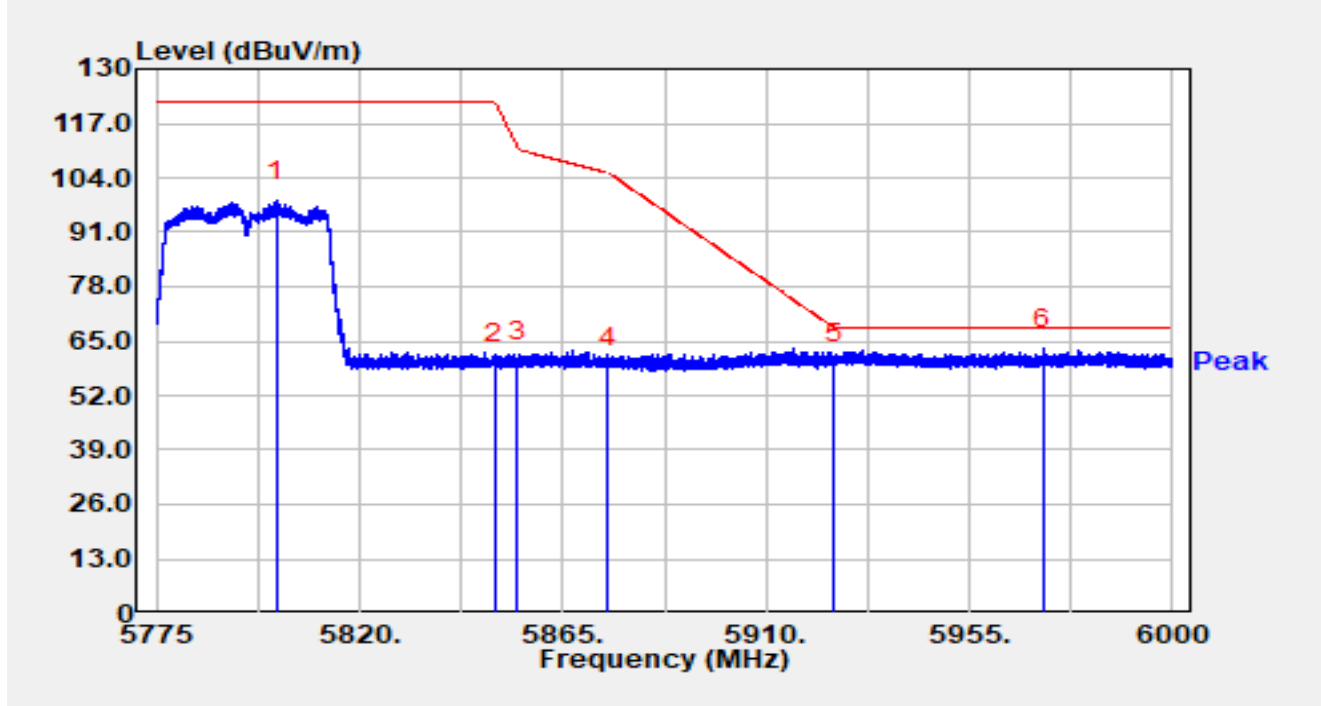


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5801.663	92.05	6.39	98.44	N/A	N/A	Peak
2		5850.000	52.96	6.85	59.81	-62.39	122.20	Peak
3		5855.000	53.08	6.91	59.99	-50.81	110.80	Peak
4		5875.000	52.21	6.65	58.86	-46.34	105.20	Peak
5		5925.000	52.01	7.73	59.74	-8.46	68.20	Peak
6	*	5971.335	56.00	7.08	63.08	-5.12	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

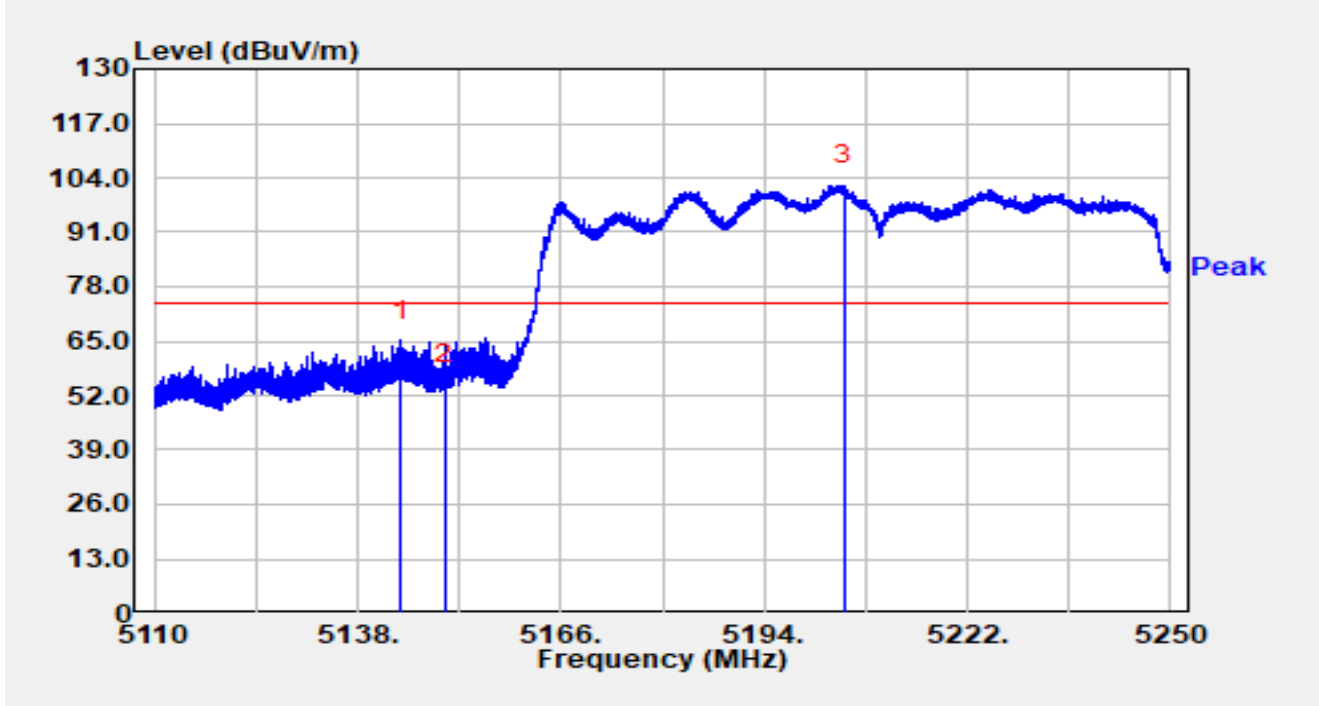


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.922	68.21	-3.15	65.05	-8.95	74.00	Peak
2		5150.000	56.84	-2.21	54.63	-19.37	74.00	Peak
3		5205.060	60.91	41.33	102.24	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

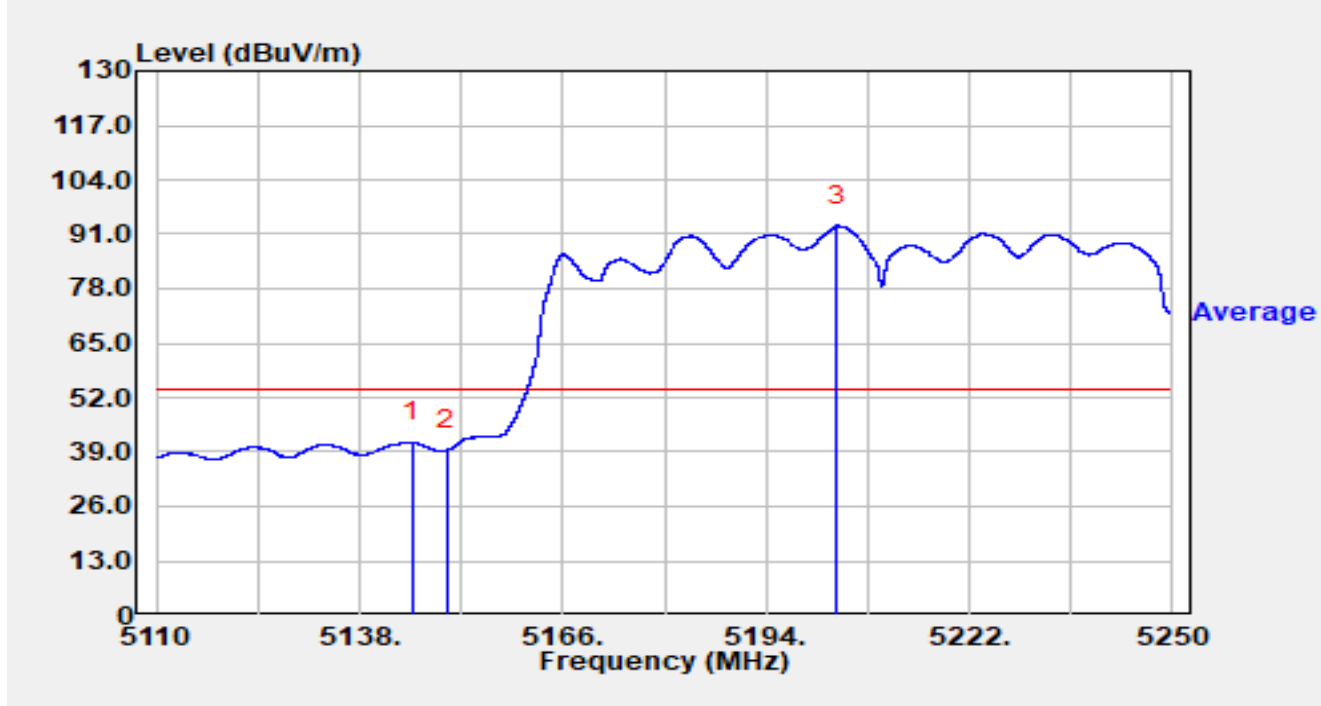


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.266	44.25	-2.99	41.25	-12.75	54.00	Average
2		5150.000	41.61	-2.21	39.40	-14.60	54.00	Average
3		5203.800	49.75	43.31	93.06	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

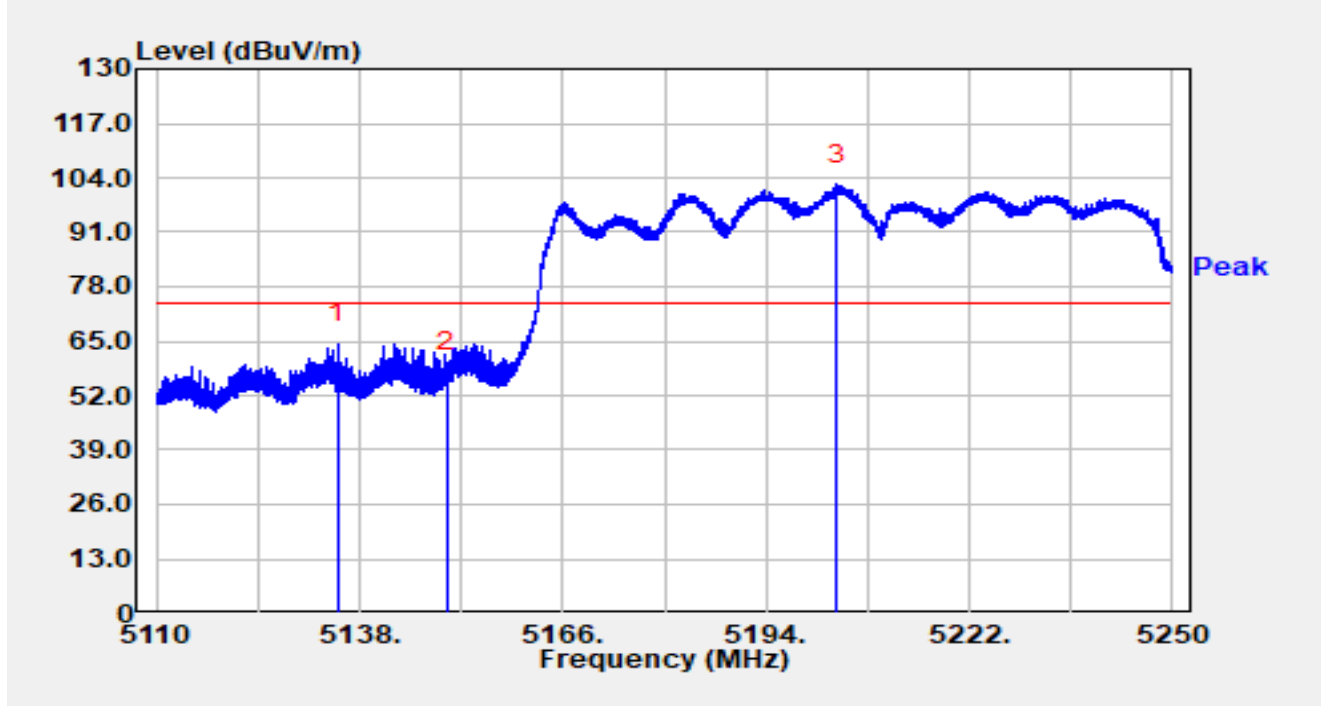


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5135.004	68.02	-3.55	64.47	-9.53	74.00	Peak
2		5150.000	59.77	-2.21	57.56	-16.44	74.00	Peak
3		5203.814	59.01	43.29	102.30	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

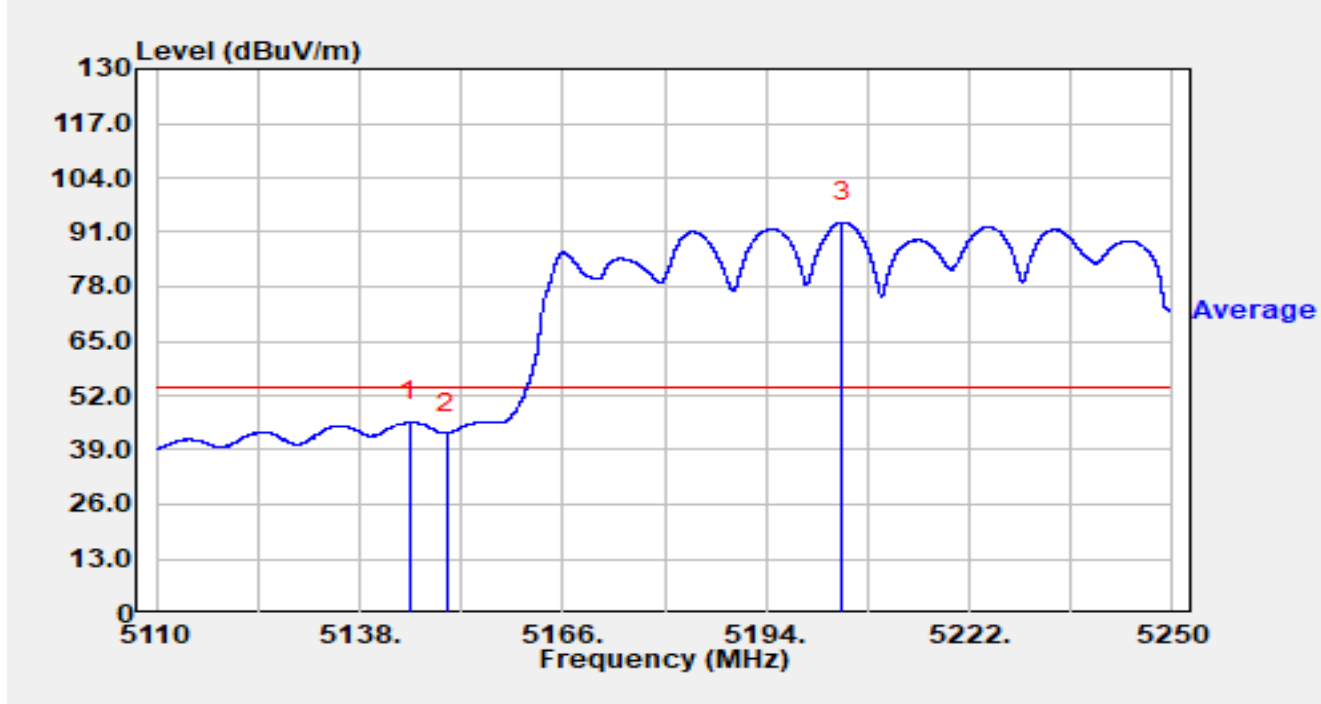


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.972	48.72	-3.03	45.69	-8.31	54.00	Average
2		5150.000	45.34	-2.21	43.12	-10.88	54.00	Average
3		5204.514	51.12	42.25	93.37	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

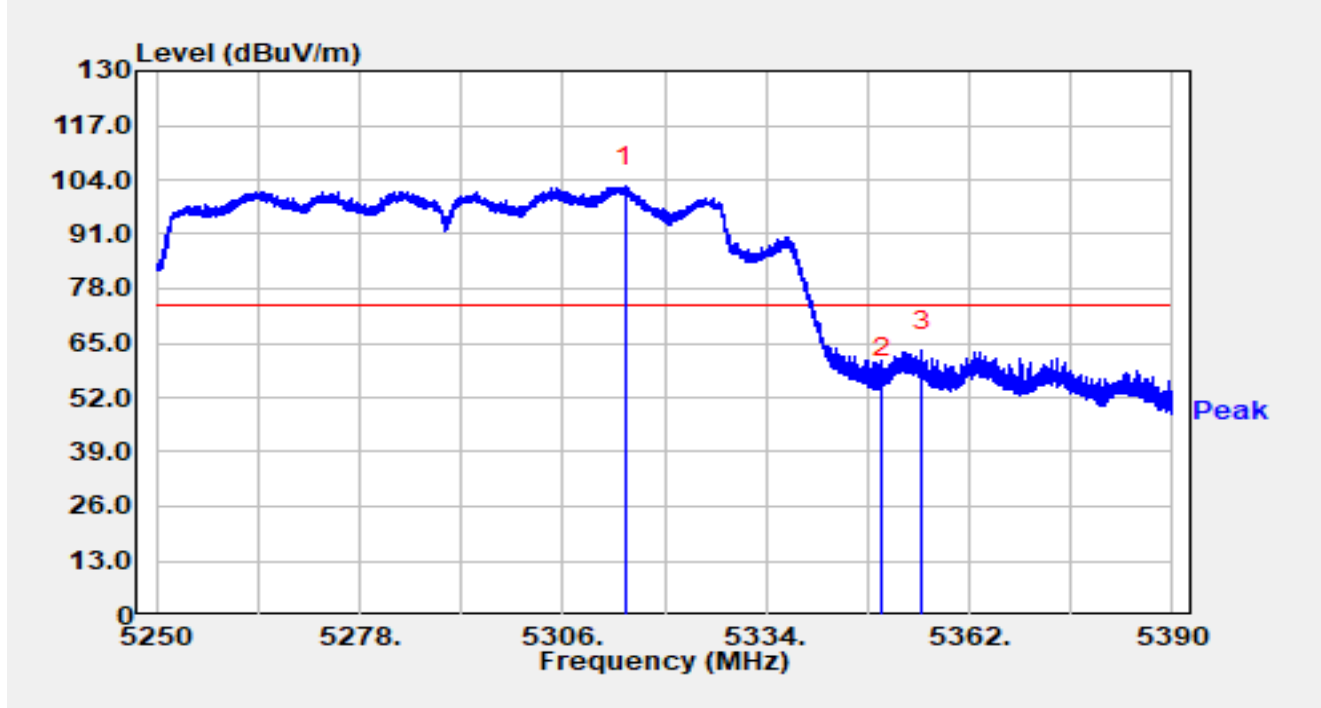


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.568	55.60	46.78	102.37	N/A	N/A	Peak
2		5350.000	58.02	-1.38	56.64	-17.36	74.00	Peak
3	*	5355.434	66.36	-3.07	63.28	-10.72	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

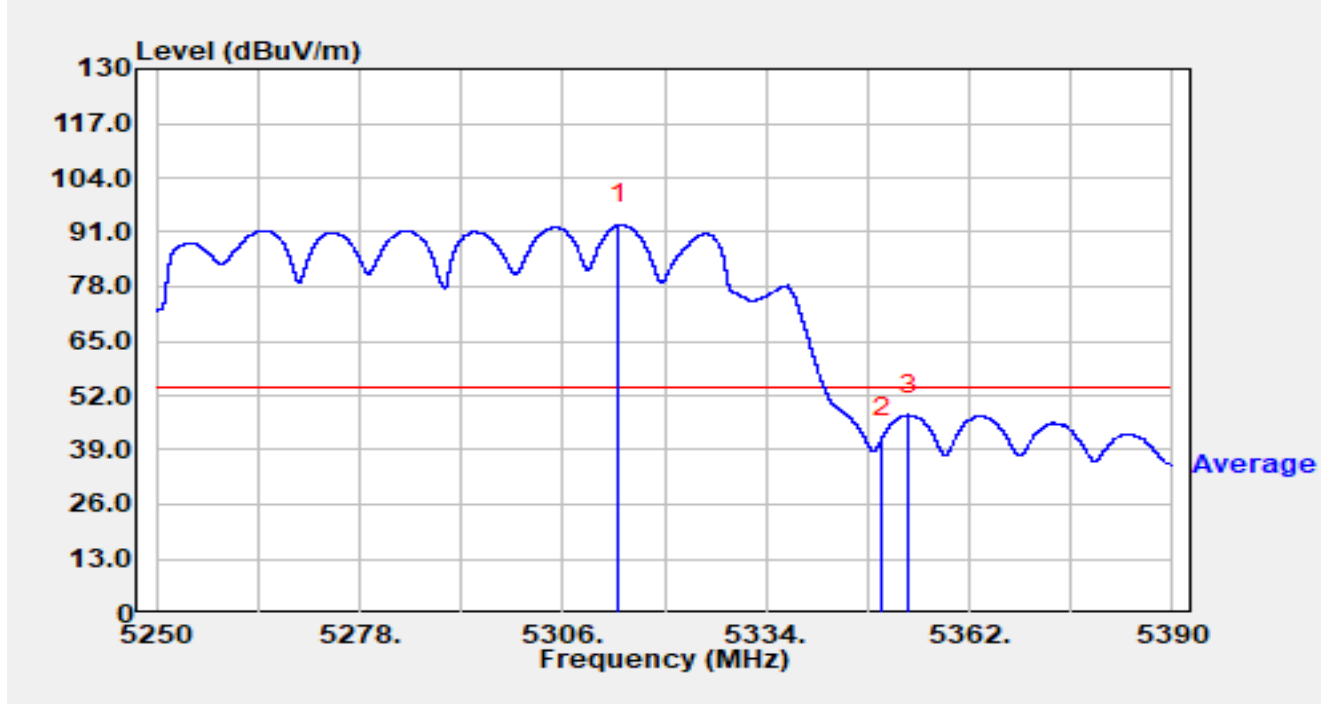


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.700	45.28	47.57	92.85	N/A	N/A	Average
2		5350.000	43.10	-1.38	41.73	-12.27	54.00	Average
3	*	5353.600	50.08	-2.73	47.35	-6.65	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

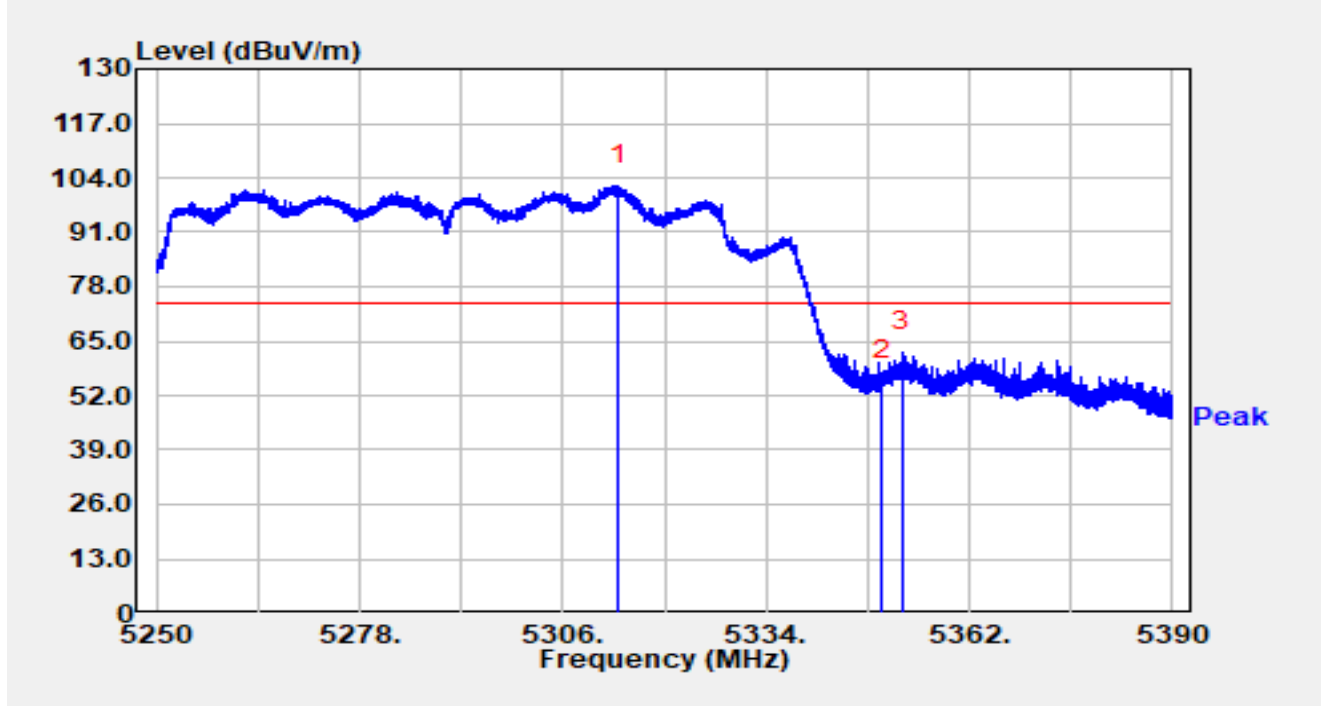


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.700	54.62	47.57	102.18	N/A	N/A	Peak
2		5350.000	56.95	-1.38	55.57	-18.43	74.00	Peak
3	*	5352.704	64.90	-2.47	62.43	-11.57	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

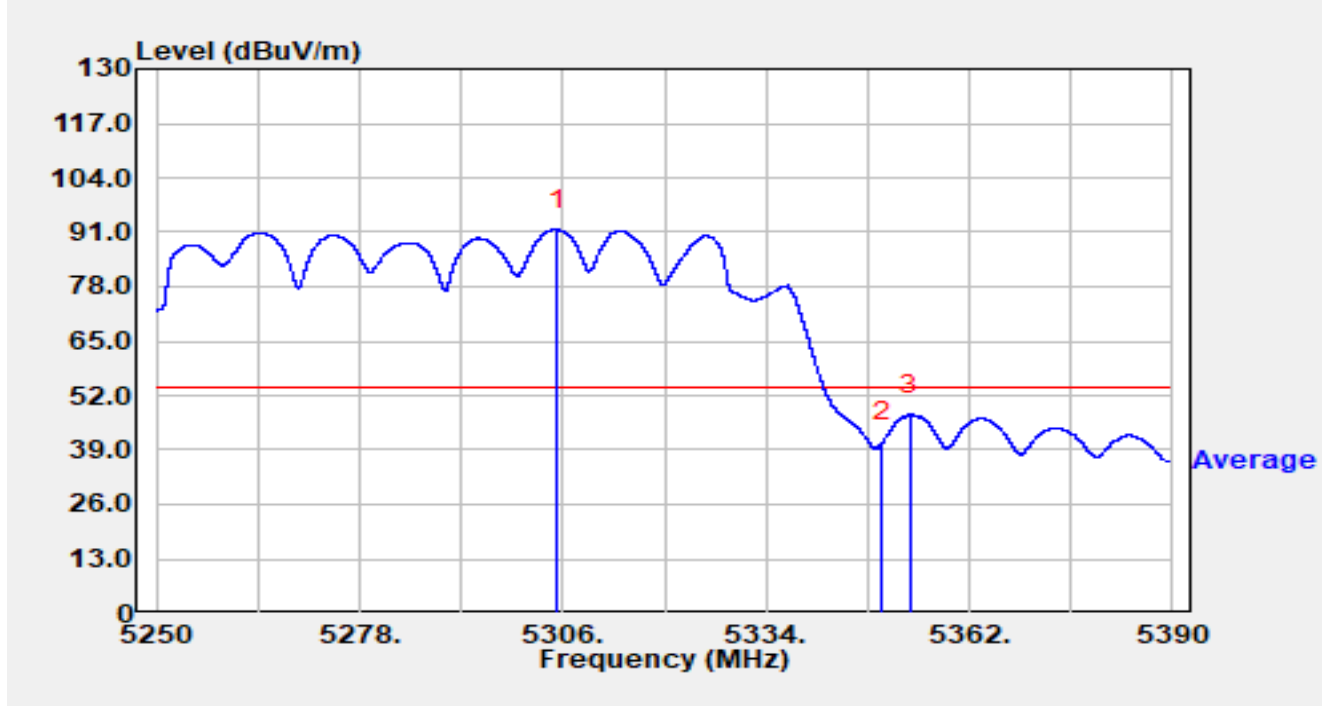


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5305.300	52.35	39.27	91.62	N/A	N/A	Average
2		5350.000	42.10	-1.38	40.72	-13.28	54.00	Average
3	*	5353.880	50.22	-2.81	47.41	-6.59	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

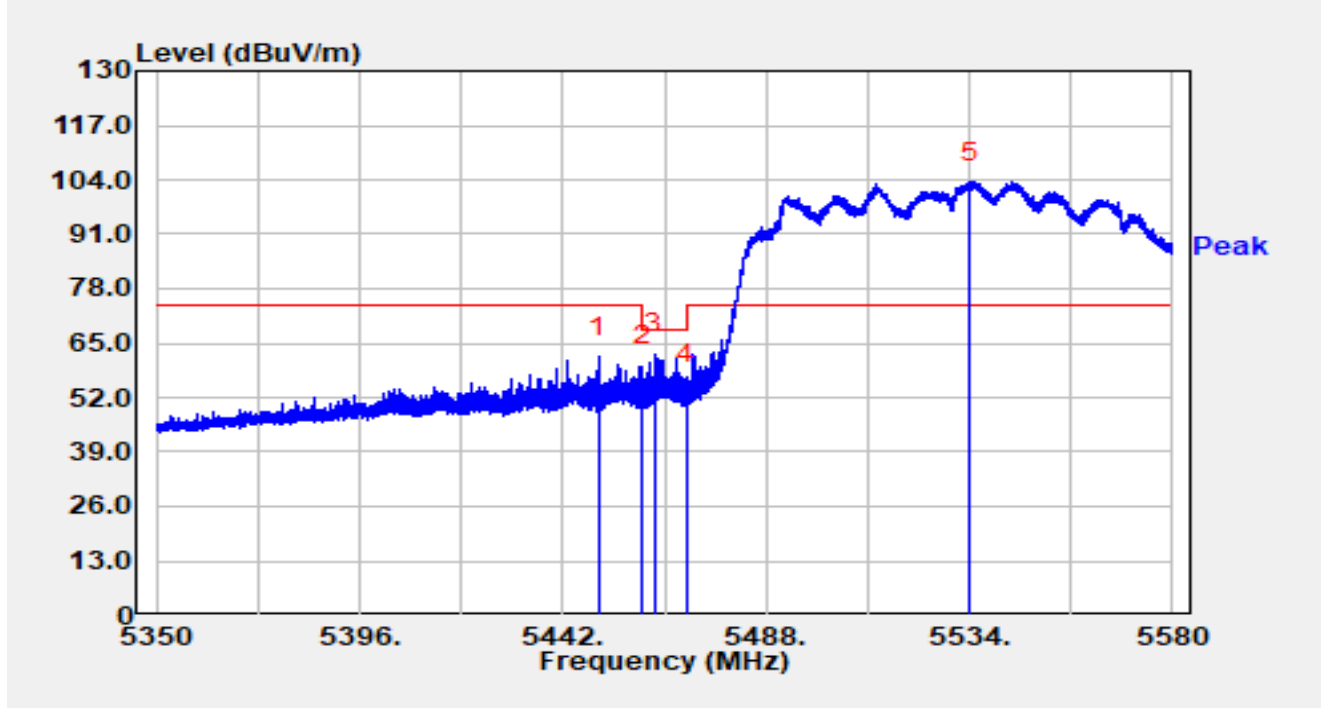


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.027	64.77	-3.16	61.61	-12.39	74.00	Peak
2		5460.000	62.01	-2.55	59.46	-8.74	68.20	Peak
3	*	5462.792	64.80	-2.33	62.47	-5.73	68.20	Peak
4		5470.000	55.80	-0.76	55.04	-13.16	68.20	Peak
5		5534.230	59.42	44.08	103.50	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

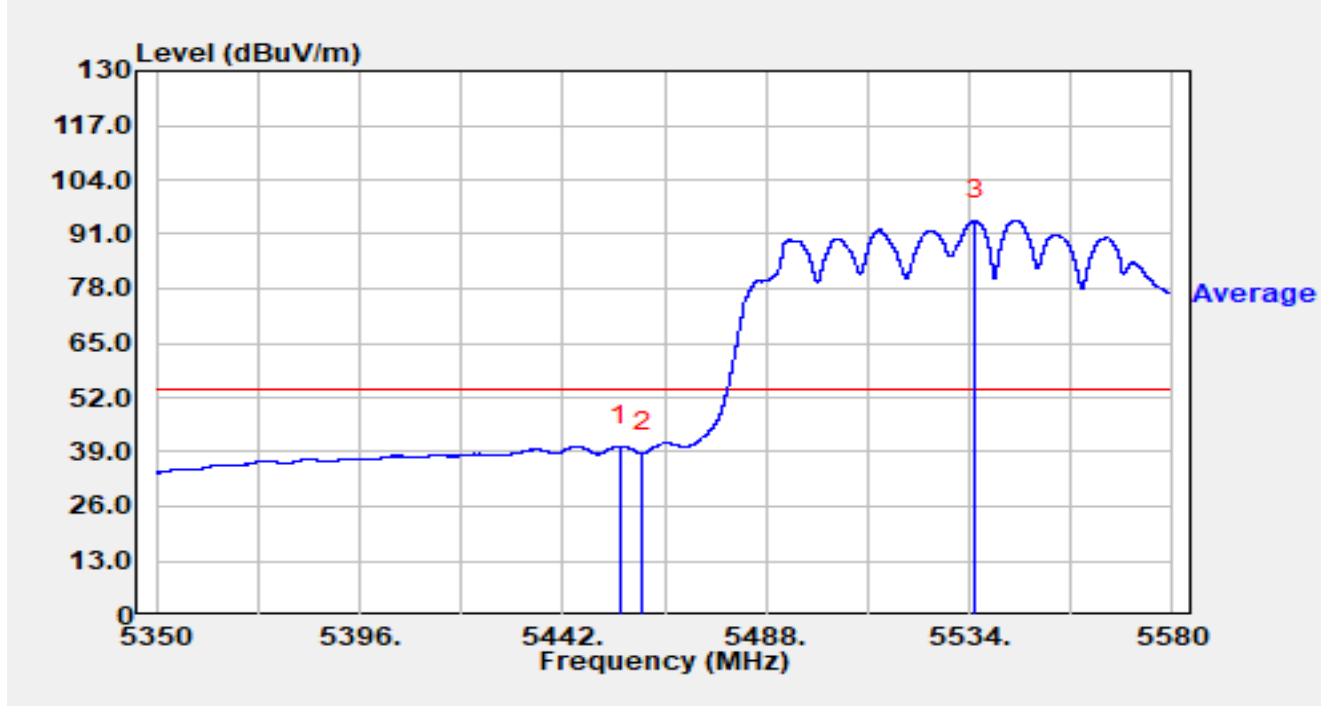


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.041	43.36	-2.93	40.44	-13.56	54.00	Average
2		5460.000	41.36	-2.55	38.80	-15.20	54.00	Average
3		5535.426	51.51	42.77	94.28	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

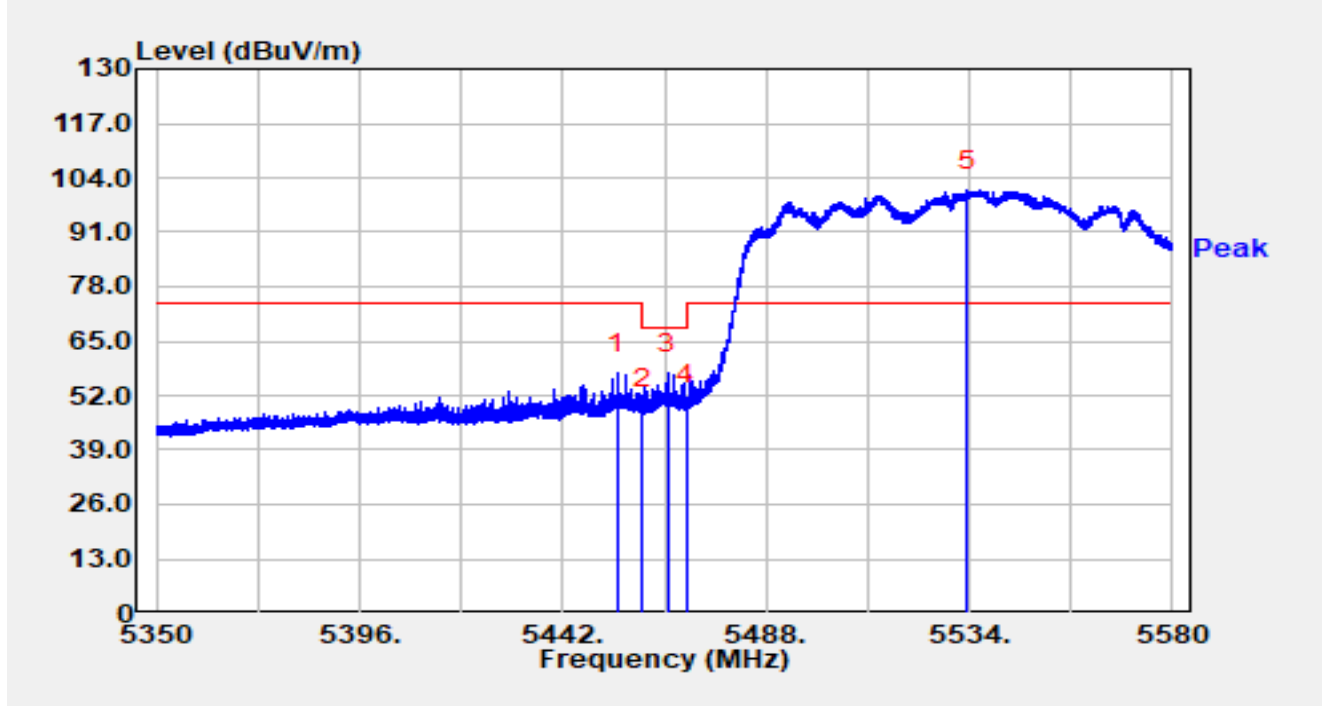


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.282	60.28	-2.98	57.30	-16.70	74.00	Peak
2		5460.000	51.44	-2.55	48.89	-19.31	68.20	Peak
3	*	5465.713	59.32	-1.92	57.40	-10.80	68.20	Peak
4		5470.000	50.36	-0.76	49.60	-18.60	68.20	Peak
5		5533.609	55.99	45.04	101.04	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

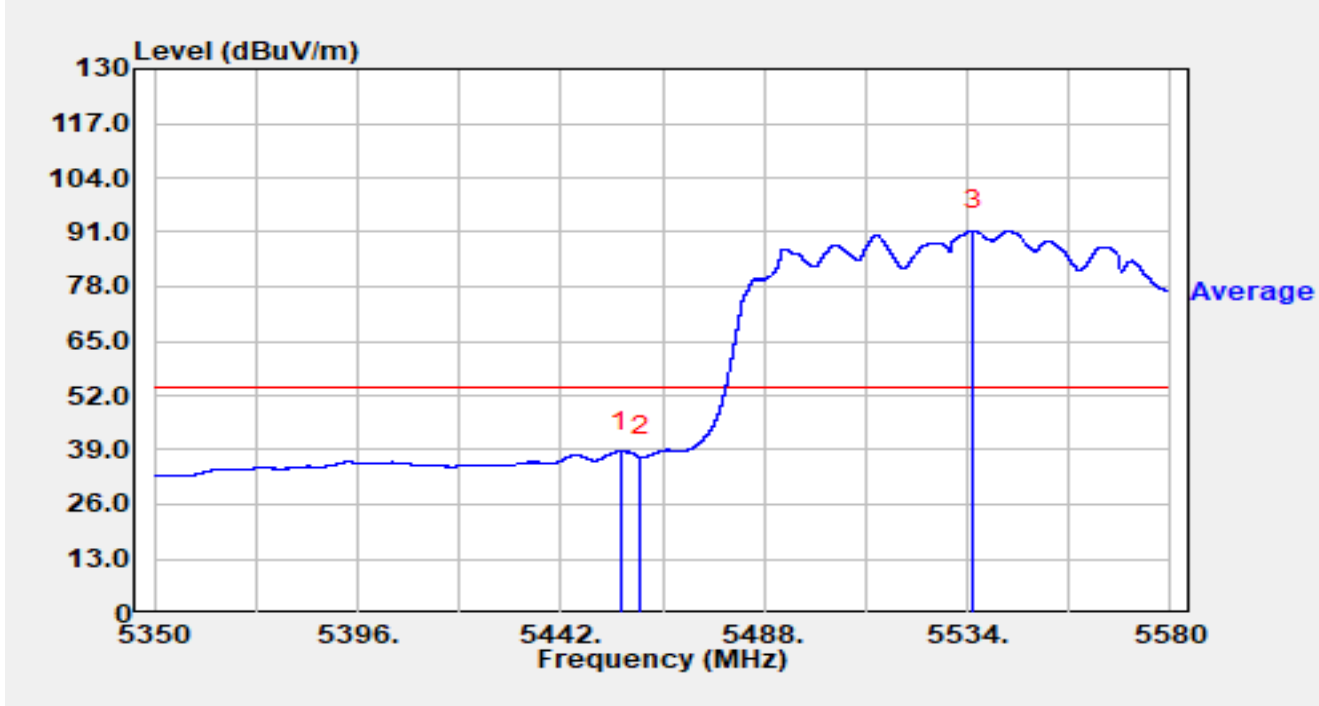


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.639	41.64	-2.90	38.74	-15.26	54.00	Average
2		5460.000	40.00	-2.55	37.45	-16.55	54.00	Average
3		5535.265	48.43	42.94	91.37	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

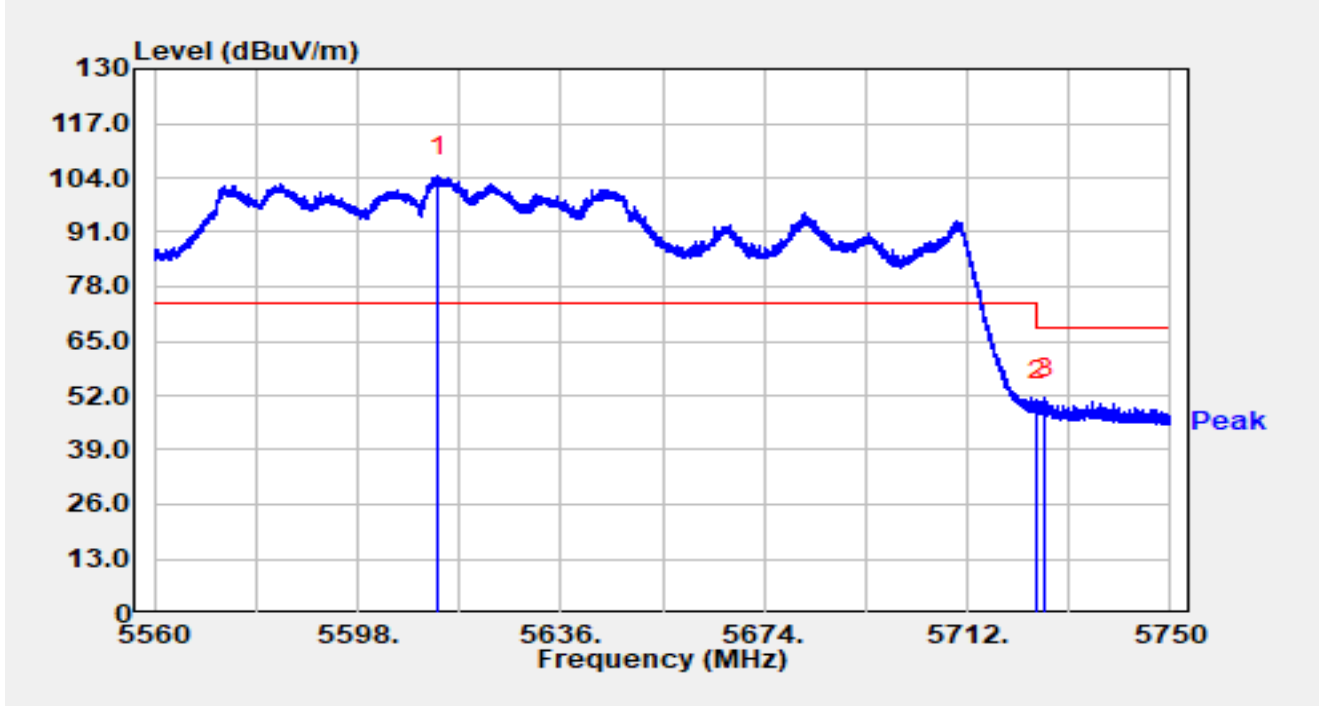


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5613.048	56.23	48.17	104.40	N/A	N/A	Peak
2		5725.000	51.69	-0.89	50.80	-17.40	68.20	Peak
3	*	5726.497	53.08	-1.63	51.44	-16.76	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

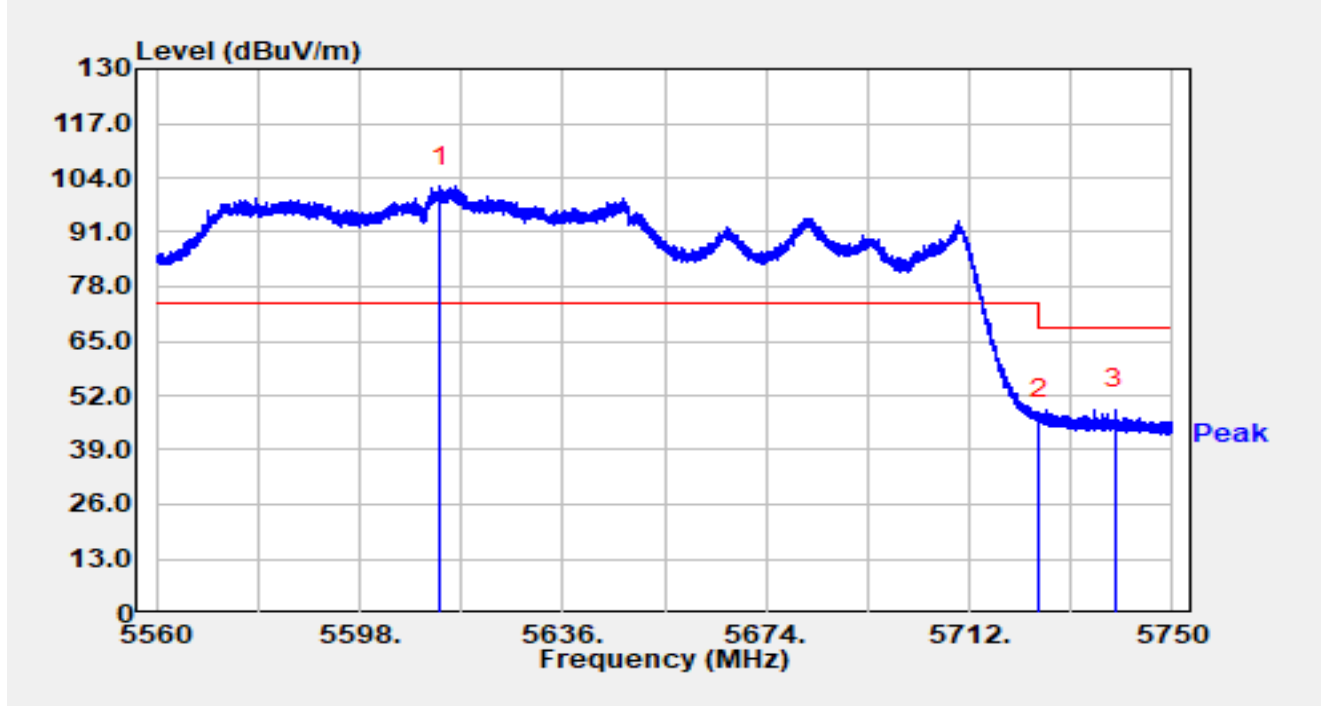


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5612.972	53.56	48.31	101.86	N/A	N/A	Peak
2		5725.000	47.20	-0.89	46.31	-21.89	68.20	Peak
3	*	5739.151	52.40	-3.65	48.74	-19.46	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

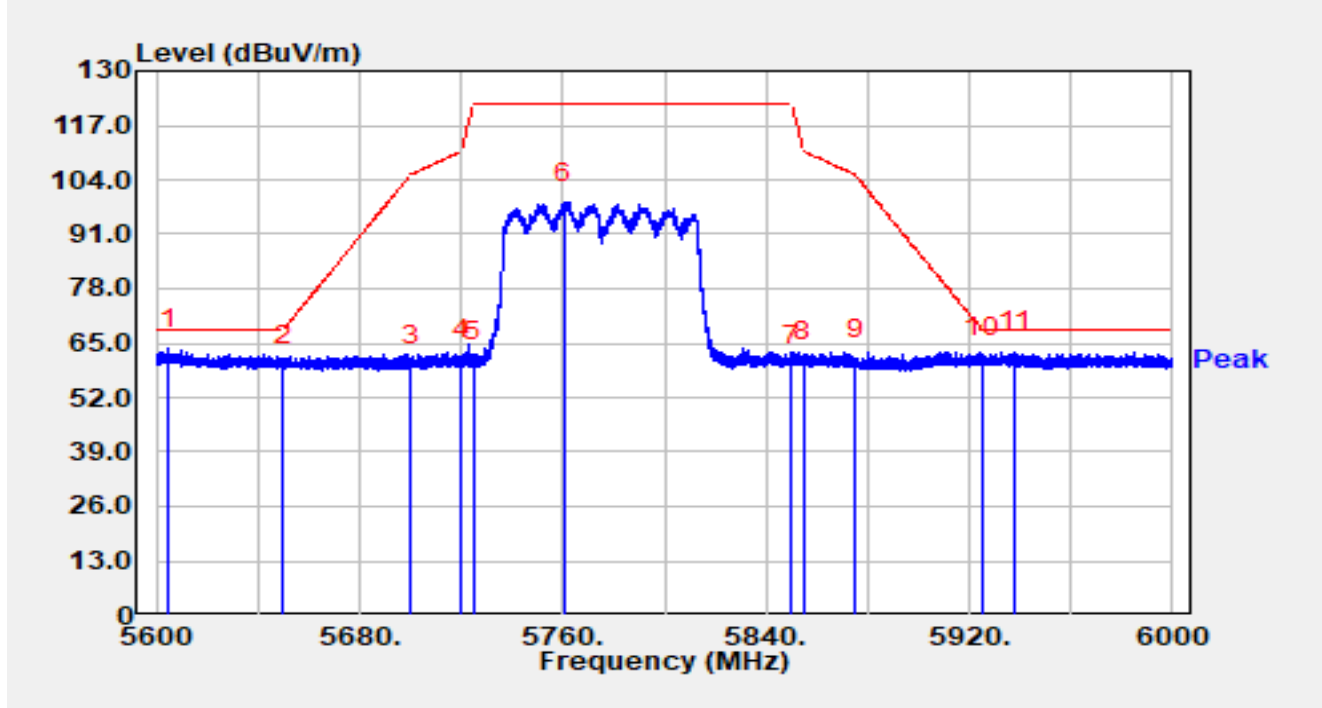

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5604.760	56.50	7.26	63.76	-4.44	68.20	Peak
2		5650.000	53.01	6.58	59.59	-8.61	68.20	Peak
3		5700.000	53.04	6.47	59.51	-45.69	105.20	Peak
4		5720.000	54.39	6.65	61.04	-49.76	110.80	Peak
5		5725.000	53.77	6.66	60.44	-61.76	122.20	Peak
6		5760.520	91.74	6.85	98.59	N/A	N/A	Peak
7		5850.000	52.92	6.85	59.77	-62.43	122.20	Peak
8		5855.000	53.67	6.91	60.58	-50.22	110.80	Peak
9		5875.000	54.37	6.65	61.03	-44.17	105.20	Peak
10		5925.000	53.79	7.73	61.52	-6.68	68.20	Peak
11		5938.200	55.50	7.33	62.83	-5.37	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

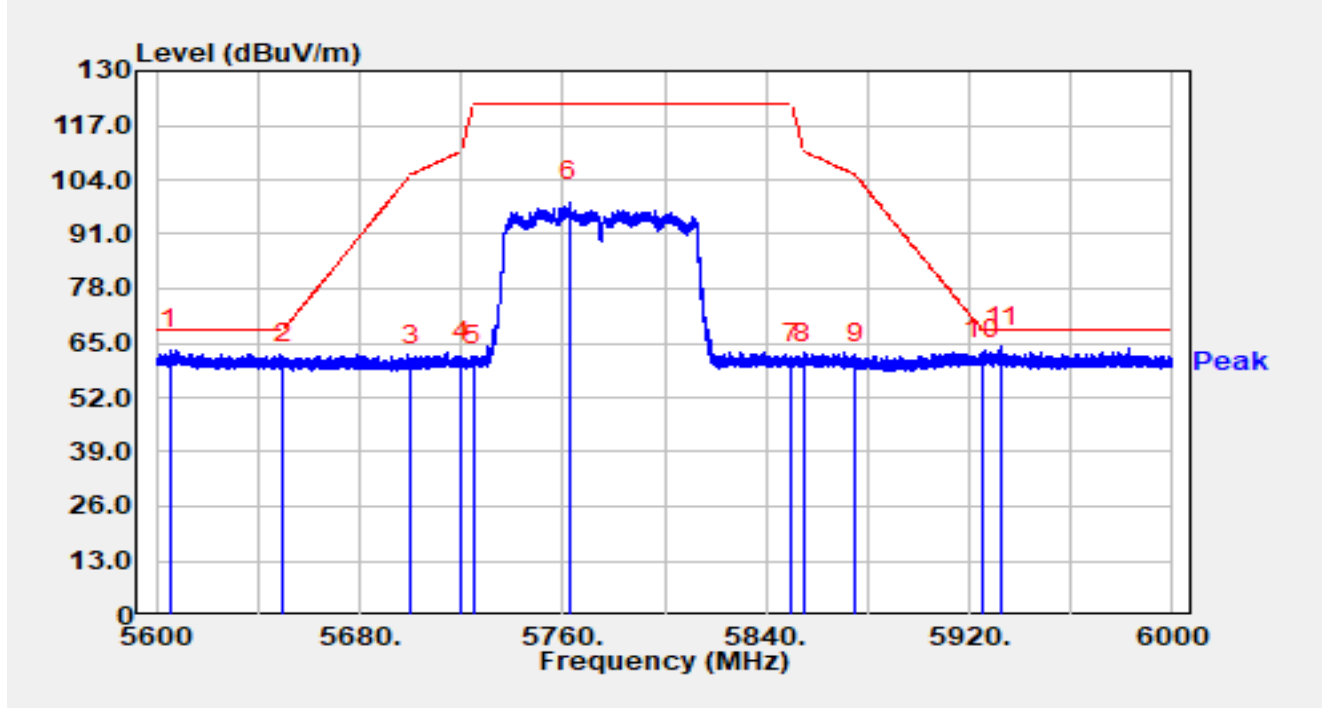

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5605.520	56.11	7.29	63.40	-4.80	68.20	Peak
2		5650.000	53.61	6.58	60.19	-8.01	68.20	Peak
3		5700.000	52.92	6.47	59.39	-45.81	105.20	Peak
4		5720.000	53.86	6.65	60.52	-50.28	110.80	Peak
5		5725.000	53.15	6.66	59.81	-62.39	122.20	Peak
6		5762.680	92.04	6.76	98.80	N/A	N/A	Peak
7		5850.000	53.24	6.85	60.10	-62.10	122.20	Peak
8		5855.000	53.23	6.91	60.14	-50.66	110.80	Peak
9		5875.000	53.60	6.65	60.25	-44.95	105.20	Peak
10		5925.000	53.30	7.73	61.02	-7.18	68.20	Peak
11	*	5933.040	56.34	7.68	64.02	-4.18	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

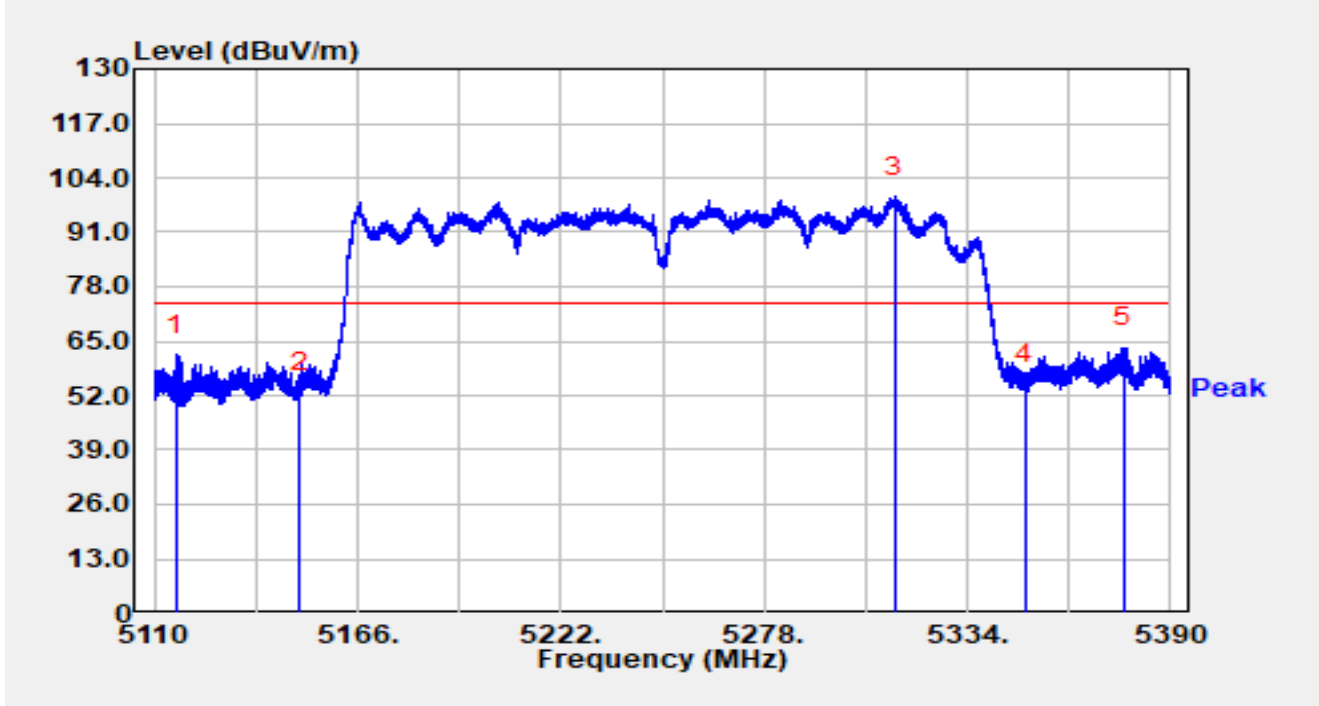


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5116.020	66.10	-4.33	61.77	-12.23	74.00	Peak
2		5150.000	55.00	-2.21	52.79	-21.21	74.00	Peak
3		5314.036	52.27	47.29	99.56	N/A	N/A	Peak
4		5350.000	55.94	-1.38	54.56	-19.44	74.00	Peak
5	*	5377.092	67.56	-4.11	63.45	-10.55	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

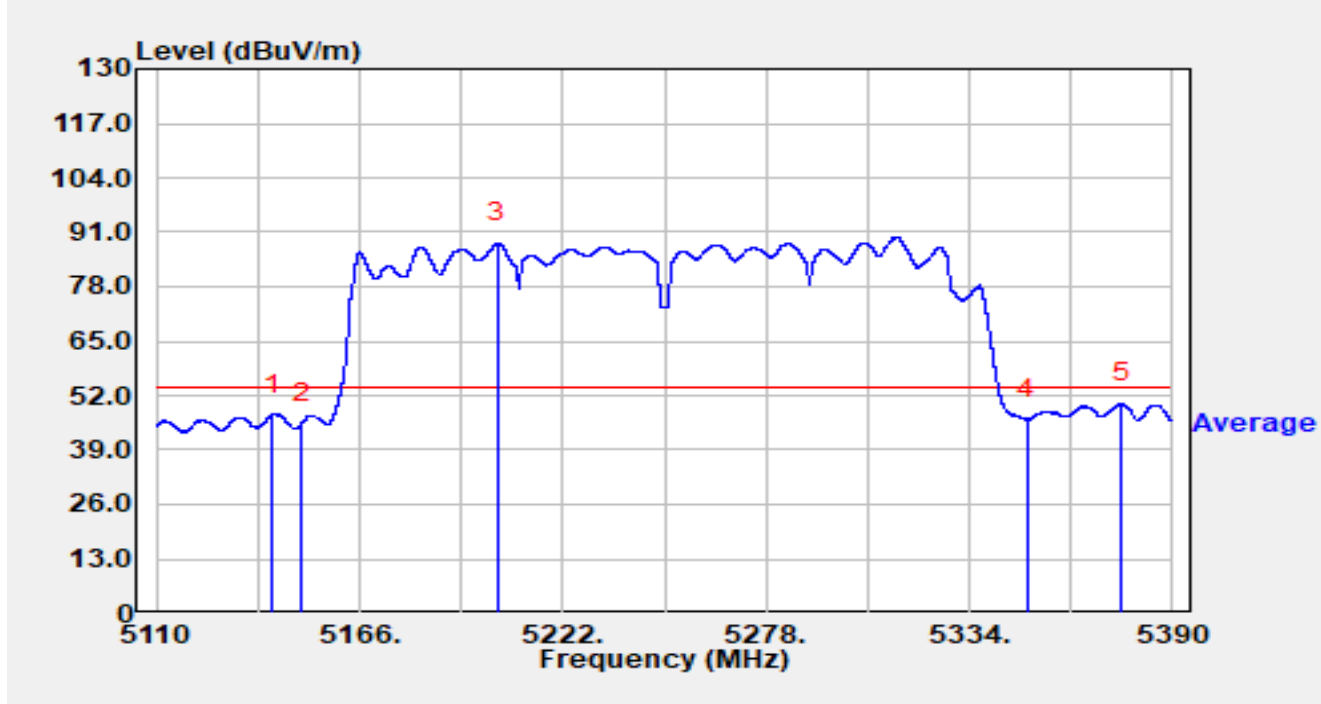


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5142.060	50.62	-3.16	47.45	-6.55	54.00	Average
2		5150.000	47.44	-2.21	45.23	-8.77	54.00	Average
3		5203.828	45.19	43.27	88.46	N/A	N/A	Average
4		5350.000	47.72	-1.38	46.34	-7.66	54.00	Average
5	*	5376.000	54.18	-4.13	50.05	-3.95	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

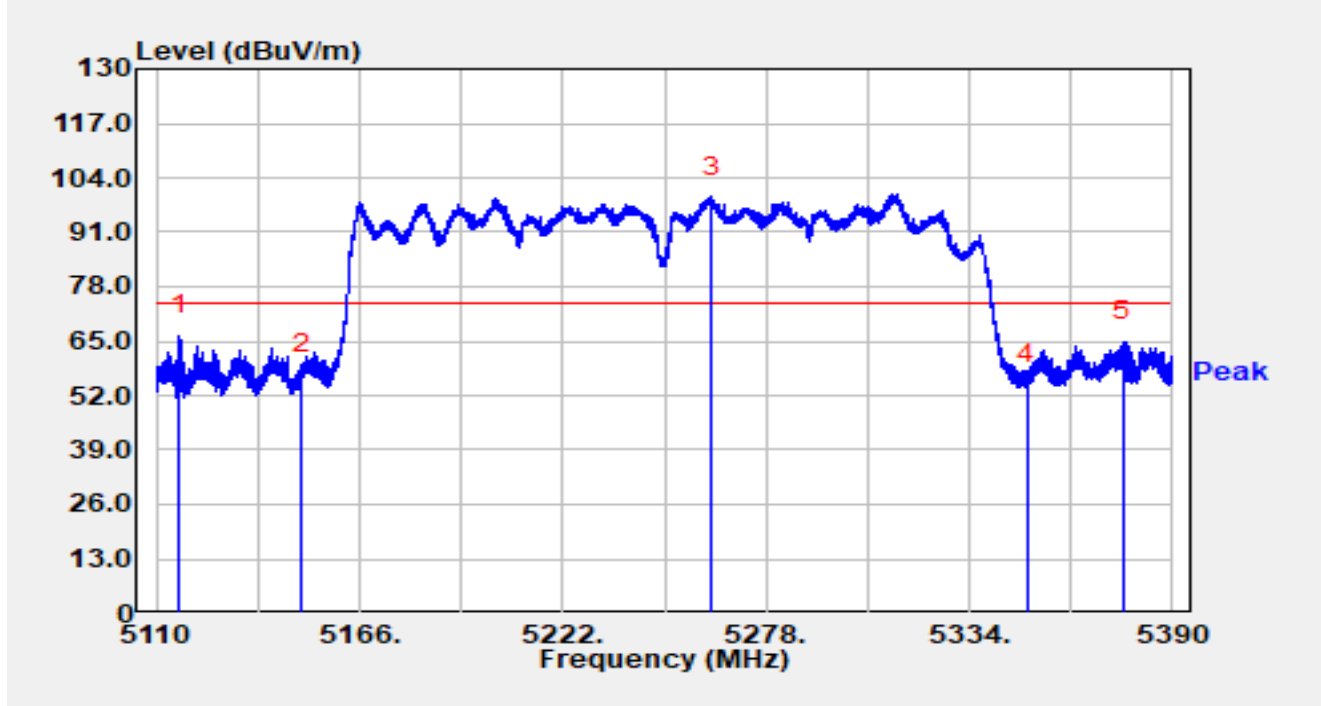


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5116.384	70.56	-4.33	66.23	-7.77	74.00	Peak
2		5150.000	59.41	-2.21	57.20	-16.80	74.00	Peak
3		5263.076	55.71	43.68	99.38	N/A	N/A	Peak
4		5350.000	55.97	-1.38	54.59	-19.41	74.00	Peak
5		5376.252	68.88	-4.12	64.76	-9.24	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	13.3°C	Humidity	34.2%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

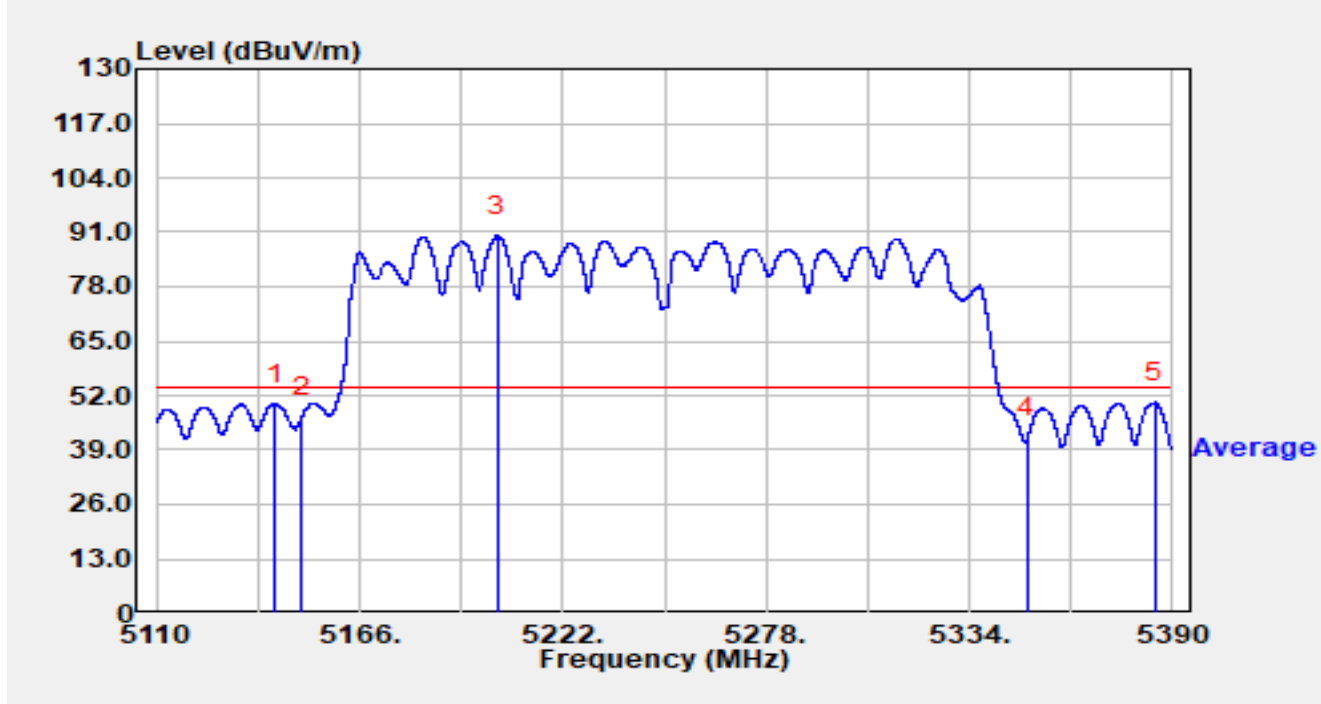


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5142.732	53.22	-3.19	50.02	-3.98	54.00	Average
2		5150.000	48.91	-2.21	46.70	-7.30	54.00	Average
3		5203.800	46.89	43.31	90.20	N/A	N/A	Average
4		5350.000	43.19	-1.38	41.81	-12.19	54.00	Average
5	*	5385.016	54.54	-4.21	50.33	-3.67	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

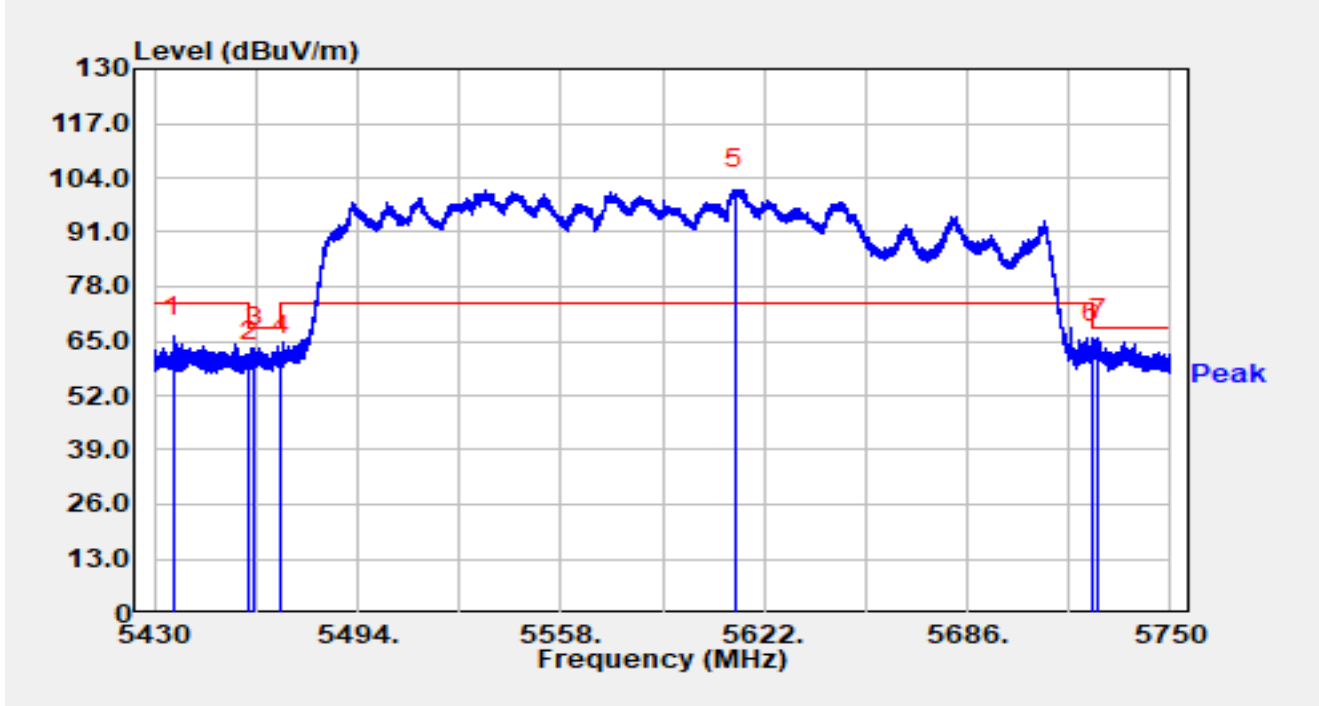


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5435.984	69.77	-3.65	66.13	-7.87	74.00	Peak
2		5460.000	62.76	-2.55	60.20	-8.00	68.20	Peak
3		5461.584	65.94	-2.47	63.46	-4.74	68.20	Peak
4		5470.000	62.37	-0.76	61.61	-6.59	68.20	Peak
5		5612.688	52.51	48.76	101.27	N/A	N/A	Peak
6		5725.000	65.19	-0.89	64.30	-3.90	68.20	Peak
7	*	5727.216	67.68	-1.95	65.73	-2.47	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

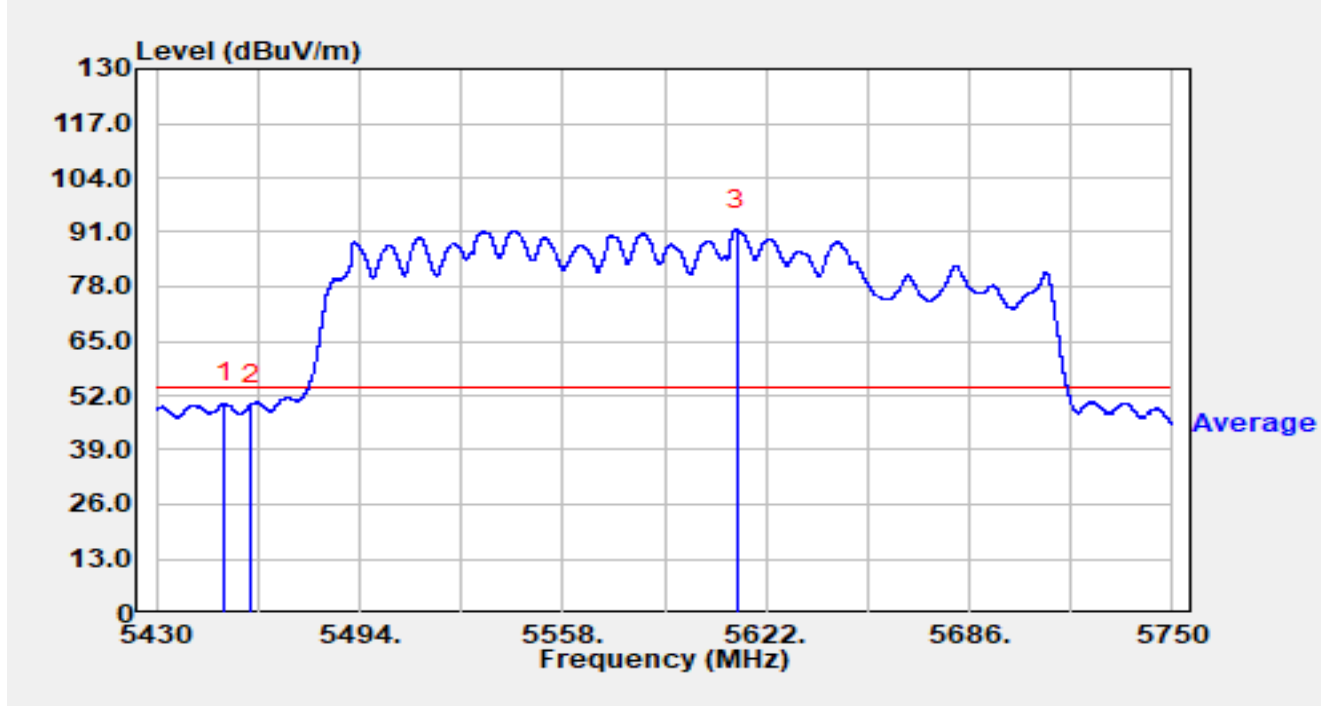


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5451.408	53.22	-3.11	50.11	-3.89	54.00	Average
2		5460.000	52.34	-2.55	49.79	-4.21	54.00	Average
3		5612.688	42.83	48.76	91.59	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

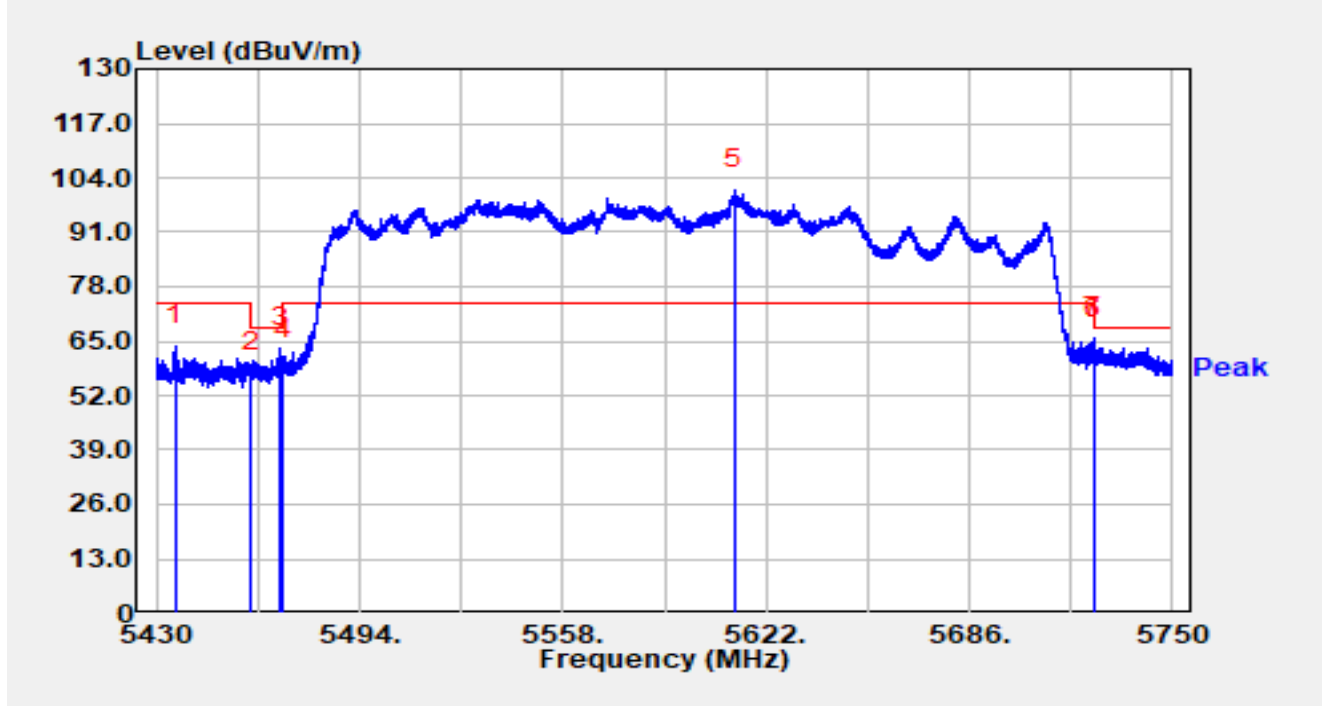


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.016	67.49	-3.65	63.84	-10.16	74.00	Peak
2		5460.000	60.11	-2.55	57.56	-10.64	68.20	Peak
3		5469.168	64.46	-1.00	63.46	-4.74	68.20	Peak
4		5470.000	61.36	-0.76	60.60	-7.60	68.20	Peak
5		5611.984	51.87	49.36	101.23	N/A	N/A	Peak
6		5725.000	66.36	-0.89	65.46	-2.74	68.20	Peak
7	*	5725.200	66.79	-1.01	65.78	-2.42	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

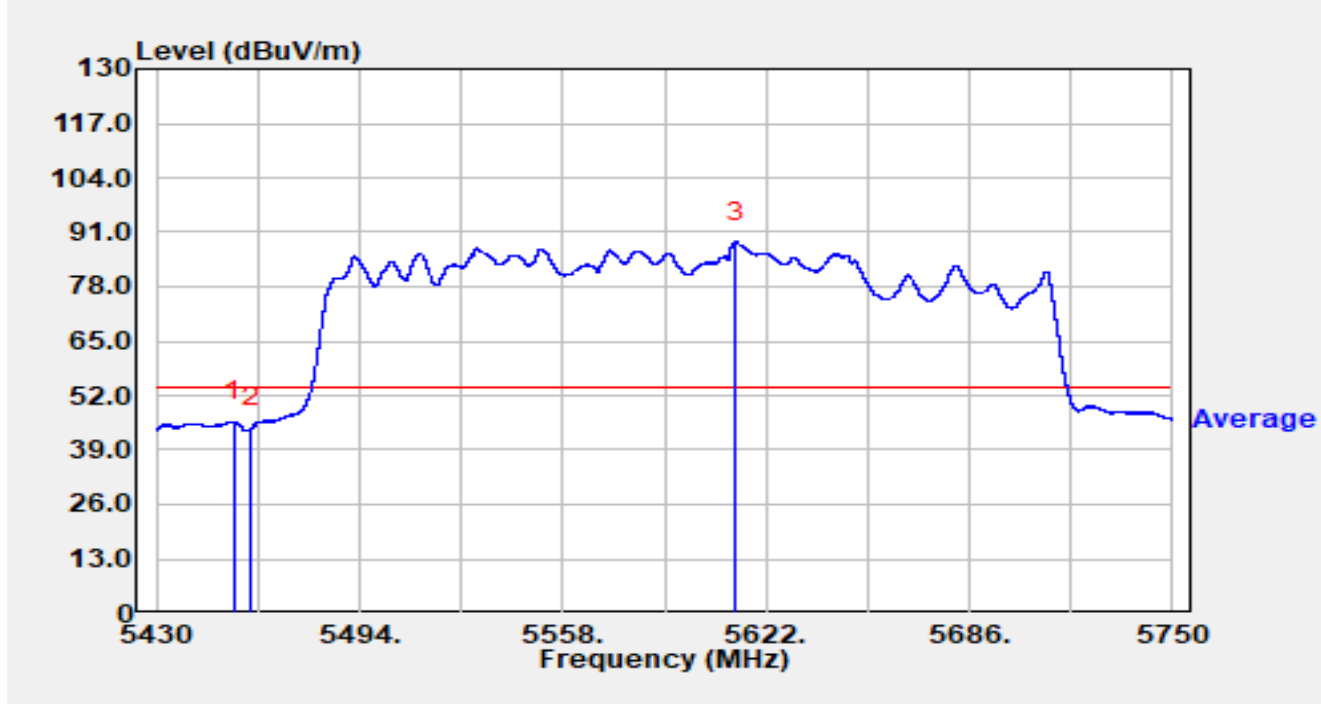


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.288	48.66	-2.98	45.68	-8.32	54.00	Average
2		5460.000	46.76	-2.55	44.20	-9.80	54.00	Average
3		5612.496	39.65	49.02	88.67	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

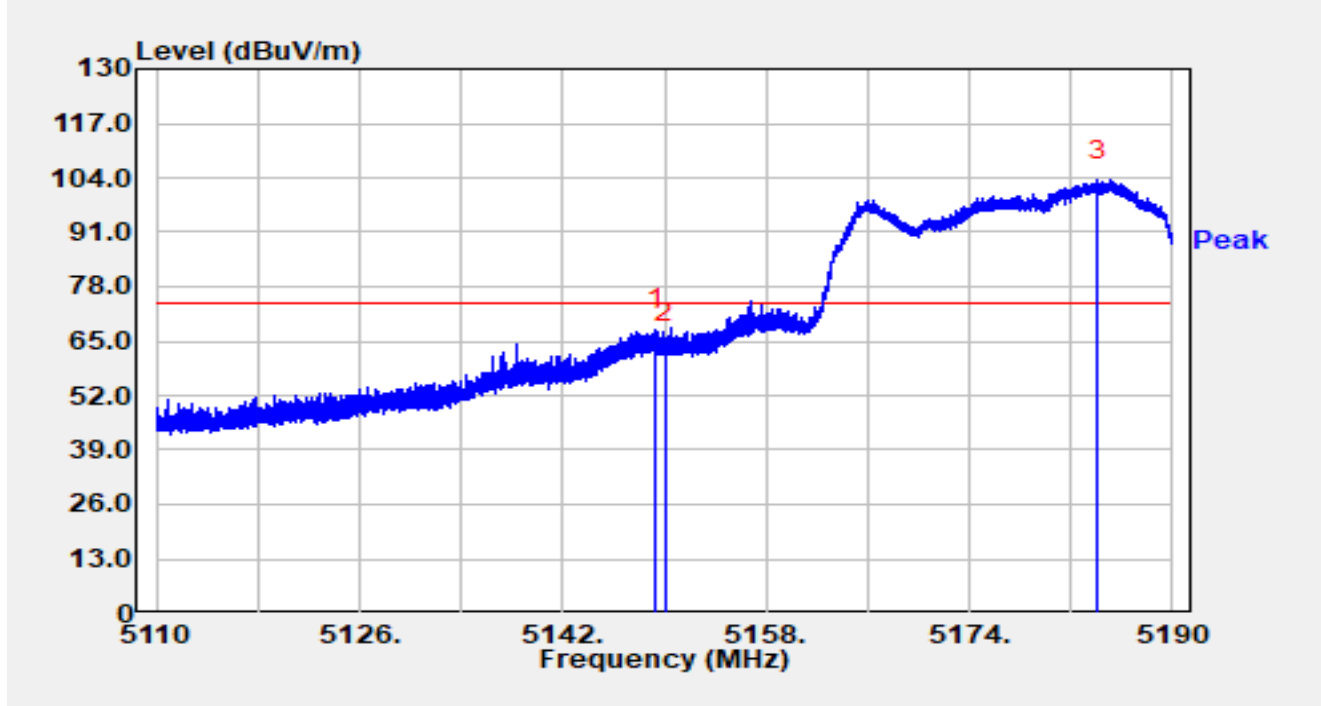


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.288	70.18	-2.36	67.82	-6.18	74.00	Peak
2		5150.000	66.84	-2.21	64.63	-9.37	74.00	Peak
3		5184.152	66.47	36.90	103.37	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

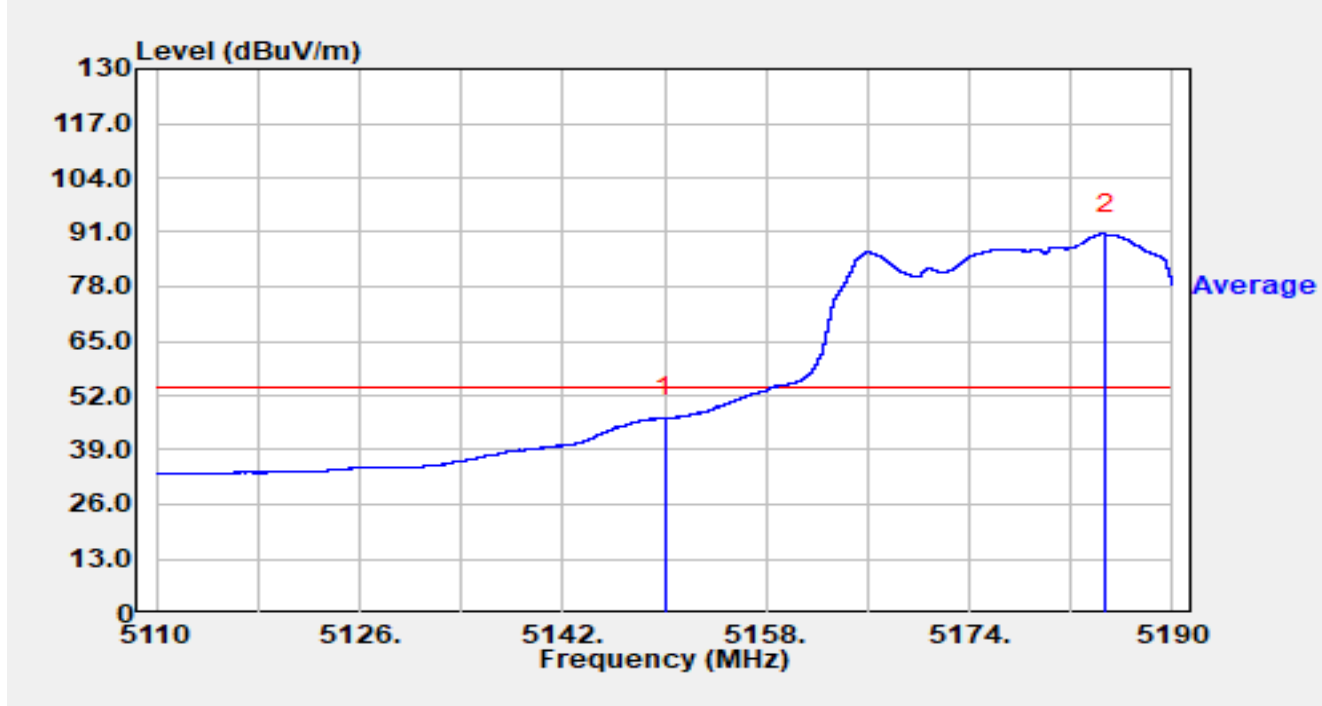


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	48.92	-2.21	46.71	-7.29	54.00	Average
2		5184.688	54.30	36.27	90.57	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

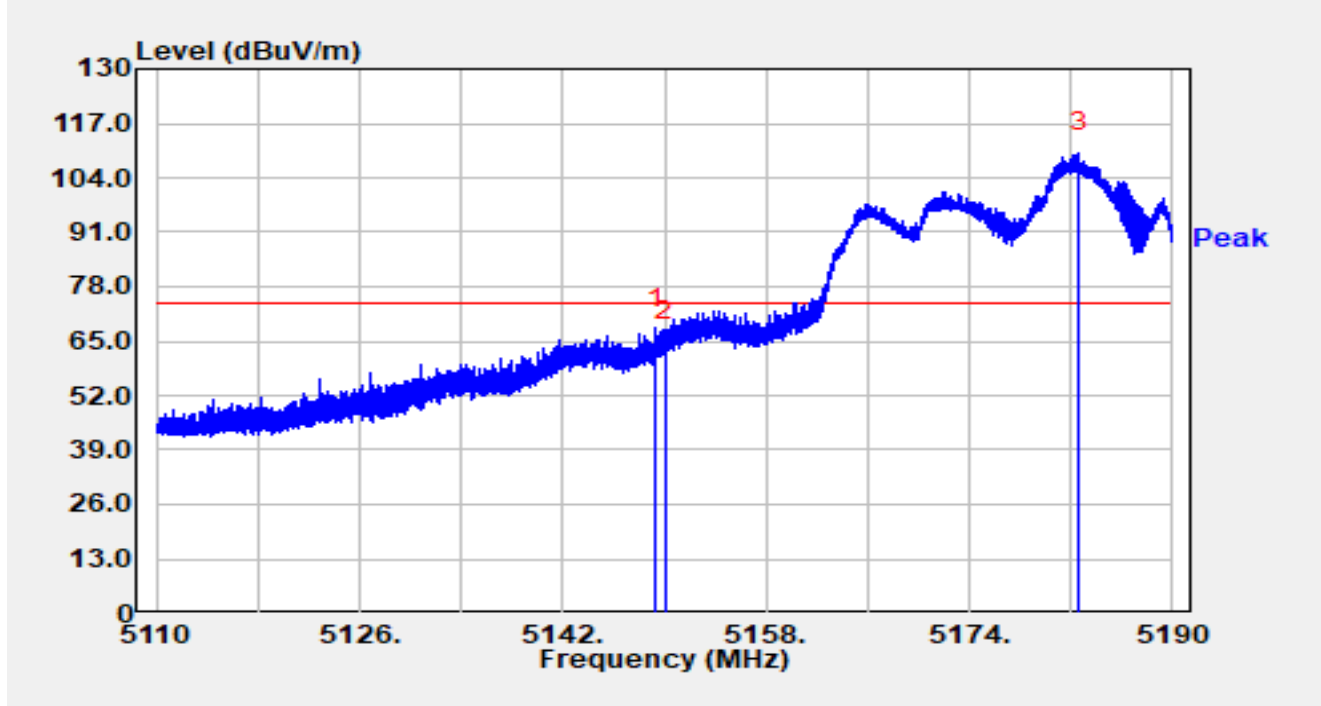


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.272	70.53	-2.36	68.16	-5.84	74.00	Peak
2		5150.000	66.99	-2.21	64.78	-9.22	74.00	Peak
3		5182.616	70.70	39.32	110.02	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

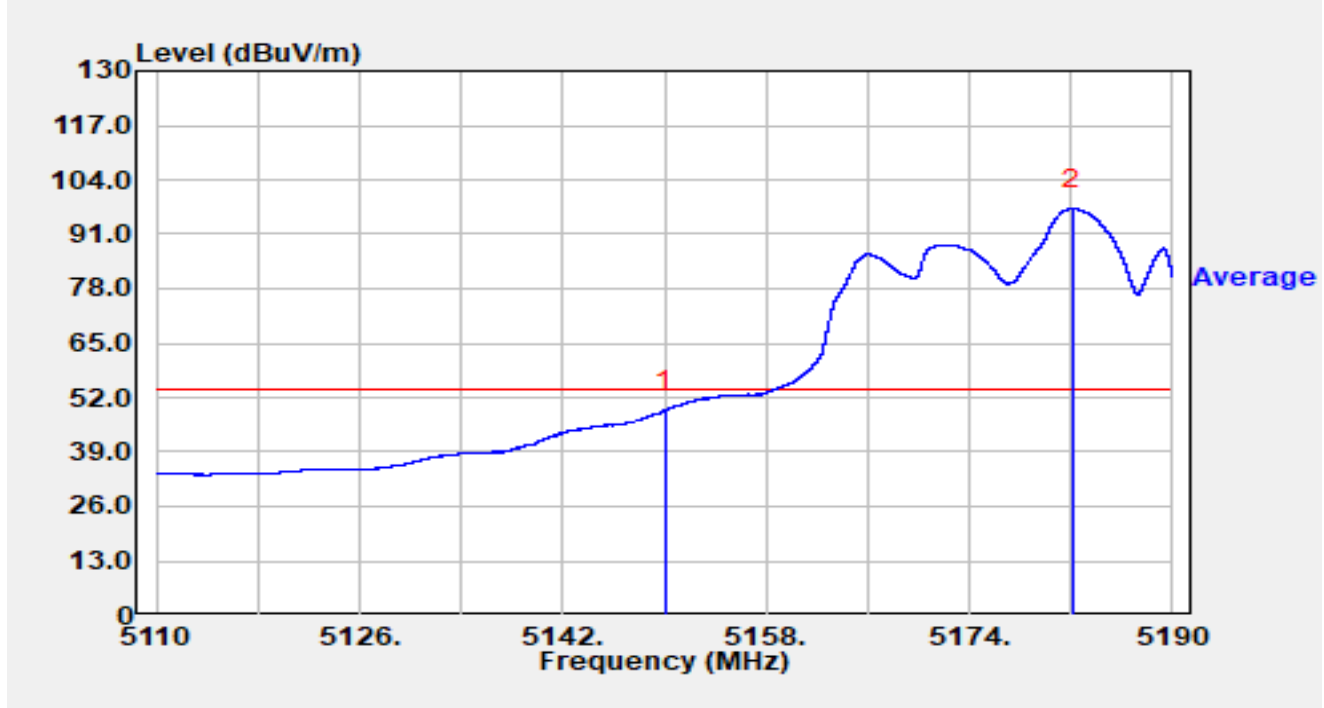


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	51.12	-2.21	48.91	-5.09	54.00	Average
2		5182.168	56.86	40.23	97.09	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

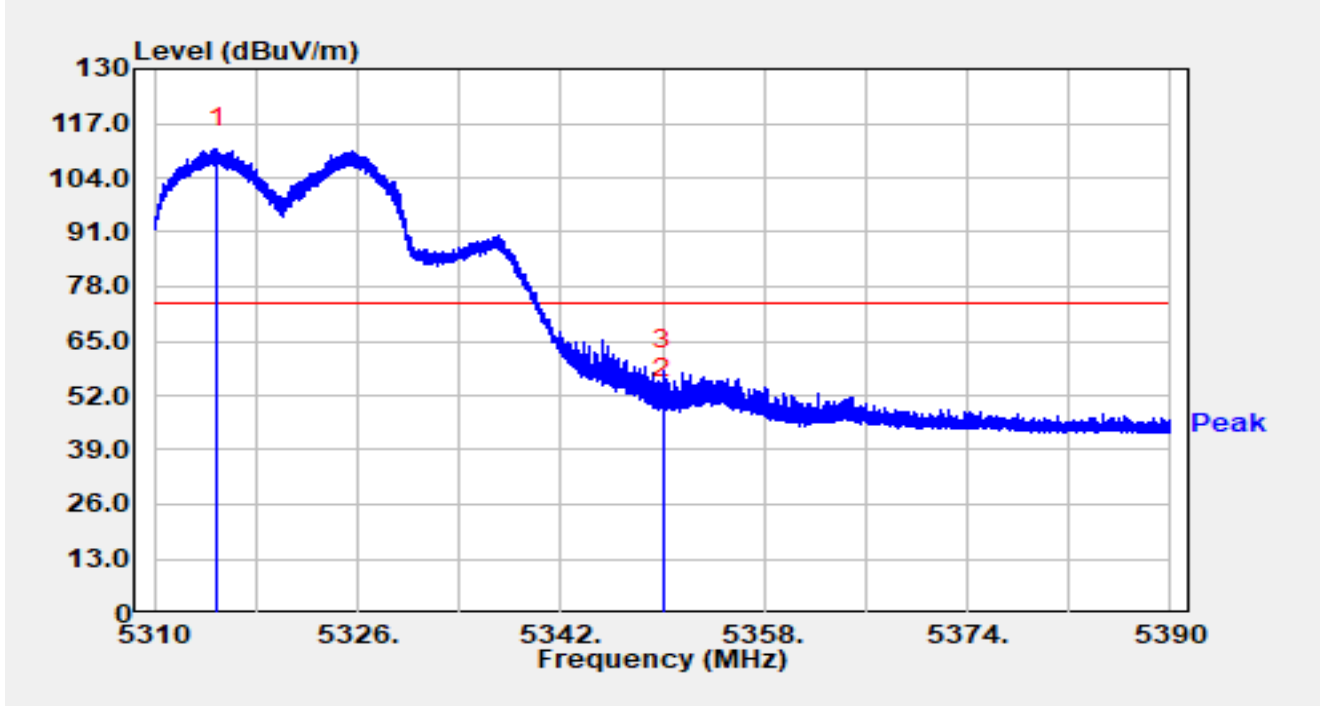


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.968	64.91	46.02	110.93	N/A	N/A	Peak
2		5350.000	52.87	-1.38	51.49	-22.51	74.00	Peak
3	*	5350.056	59.50	-1.41	58.09	-15.91	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

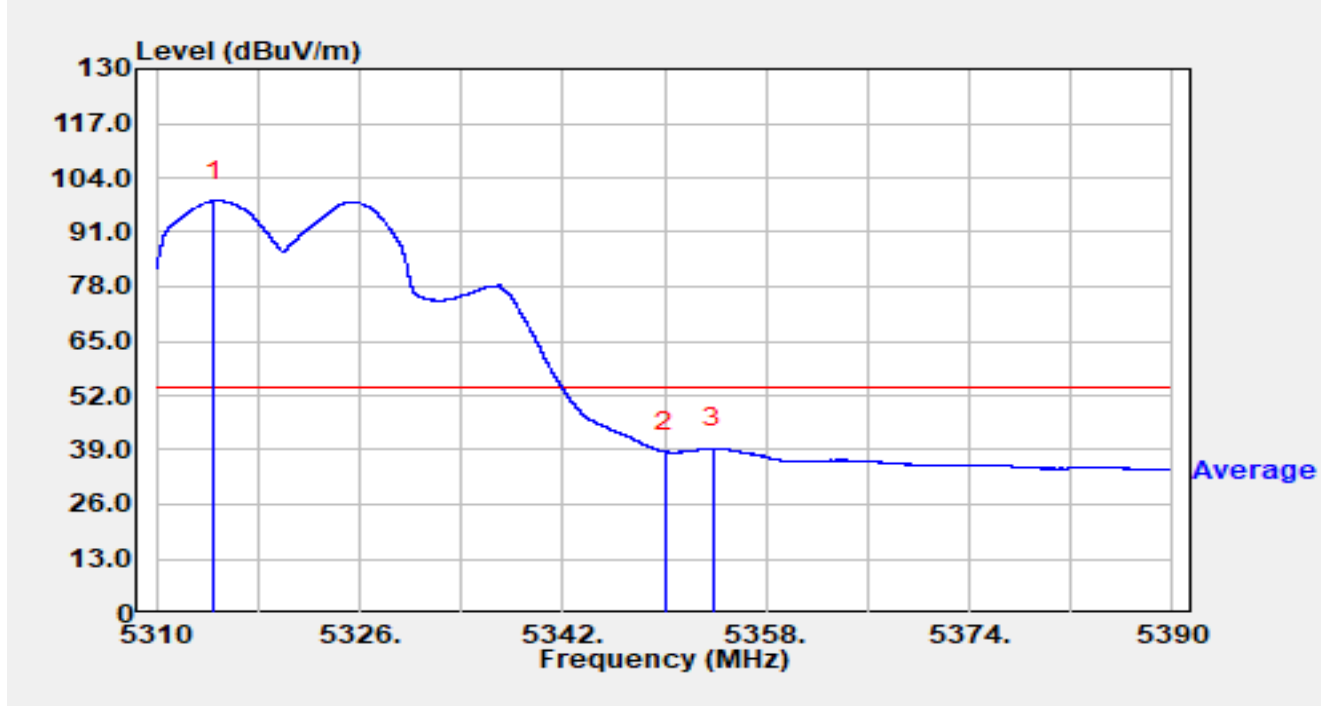


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.536	51.75	46.84	98.59	N/A	N/A	Average
2		5350.000	40.00	-1.38	38.62	-15.38	54.00	Average
3	*	5353.816	42.09	-2.79	39.30	-14.70	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

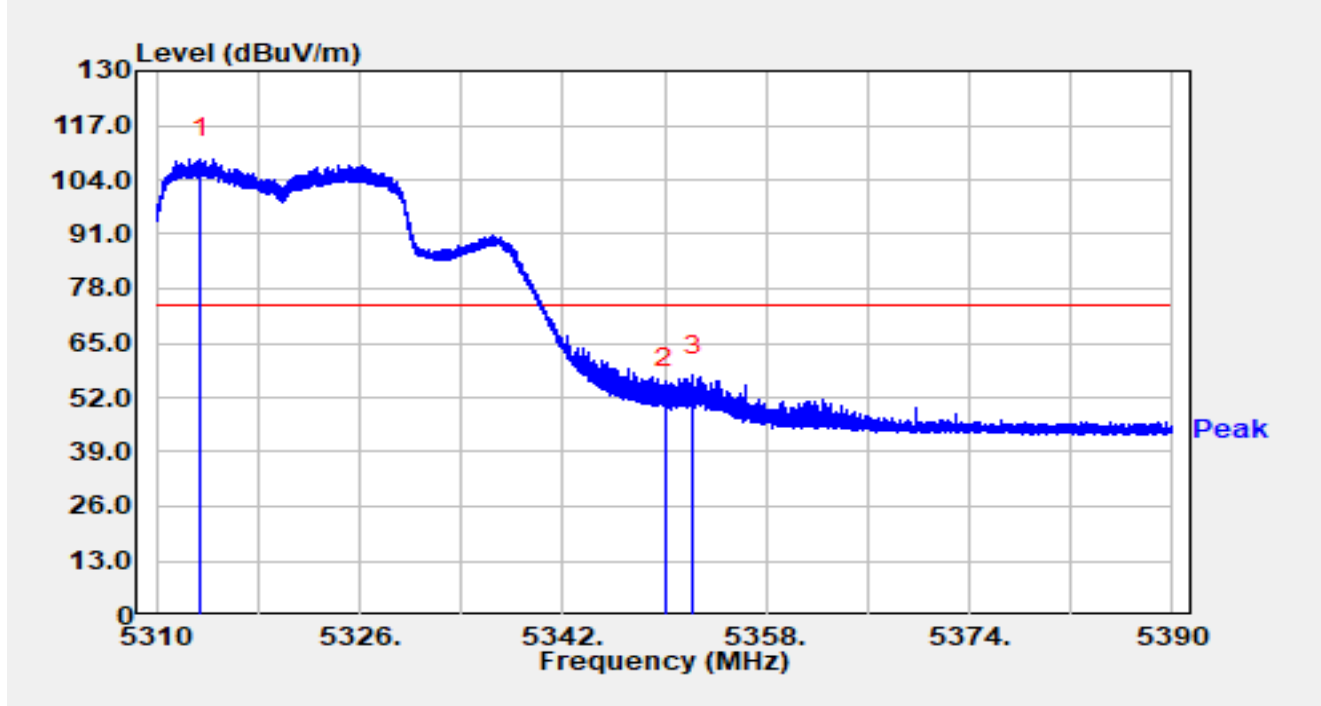


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.448	61.52	47.57	109.09	N/A	N/A	Peak
2		5350.000	55.57	-1.38	54.19	-19.81	74.00	Peak
3	*	5352.248	59.57	-2.33	57.25	-16.75	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

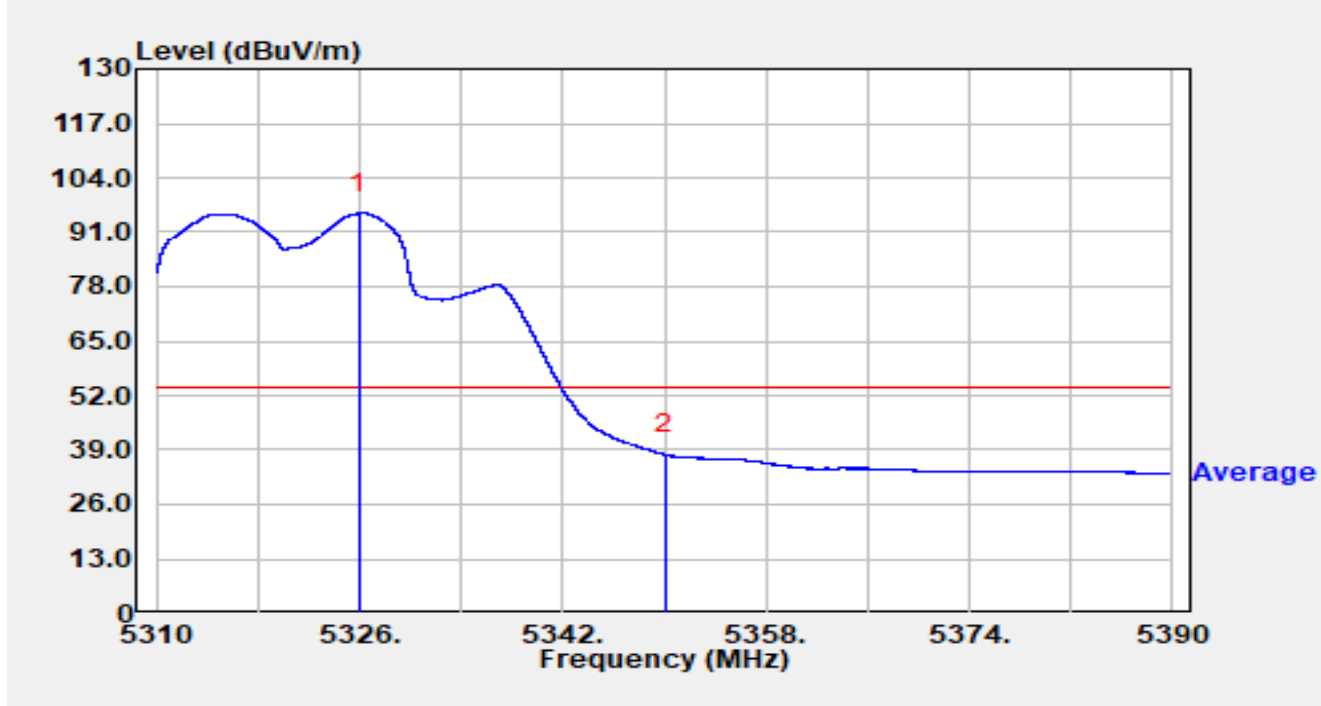


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.000	56.48	39.05	95.53	N/A	N/A	Average
2	*	5350.000	39.32	-1.38	37.94	-16.06	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

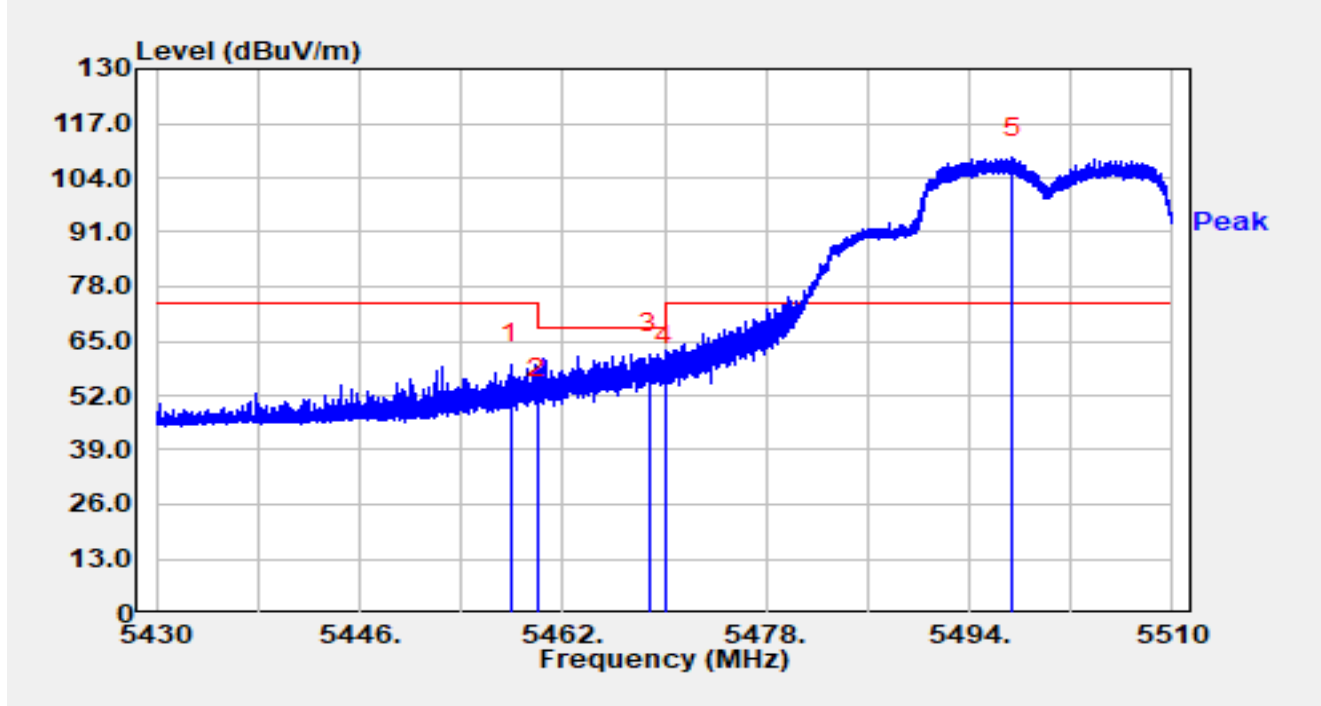


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.896	62.16	-2.74	59.41	-14.59	74.00	Peak
2		5460.000	53.82	-2.55	51.27	-16.93	68.20	Peak
3	*	5468.776	63.14	-1.20	61.94	-6.26	68.20	Peak
4		5470.000	59.67	-0.76	58.91	-9.29	68.20	Peak
5		5497.448	70.13	38.68	108.80	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

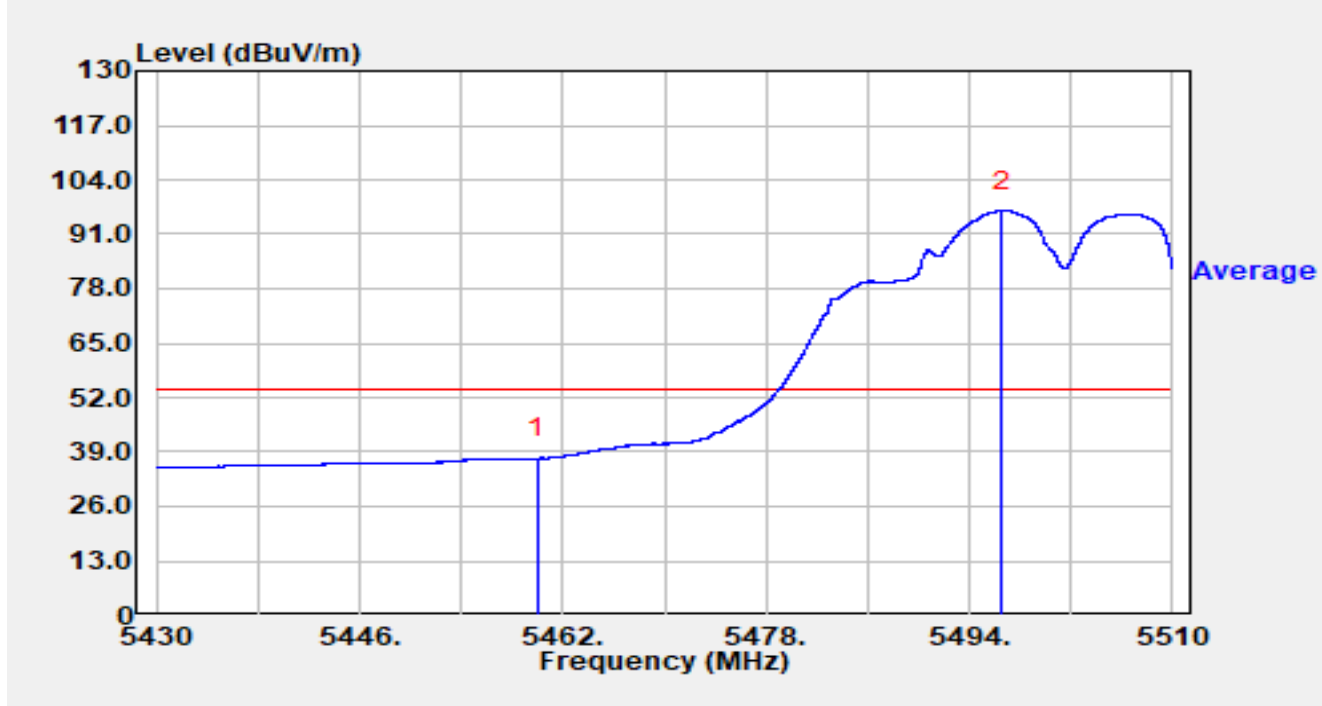


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	40.08	-2.55	37.53	-16.47	54.00	Average
2		5496.608	57.43	39.12	96.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

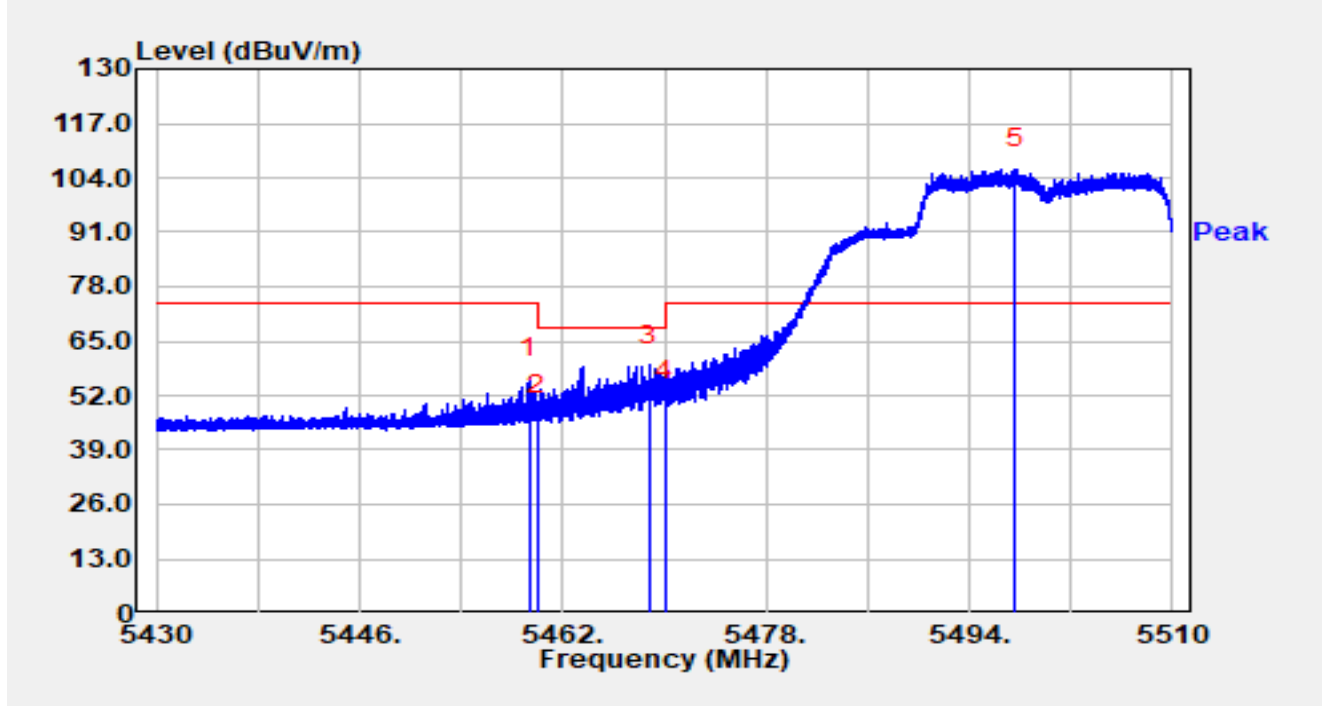


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.384	58.82	-2.64	56.19	-17.81	74.00	Peak
2		5460.000	49.67	-2.55	47.12	-21.08	68.20	Peak
3	*	5468.792	60.46	-1.20	59.27	-8.93	68.20	Peak
4		5470.000	51.49	-0.76	50.73	-17.47	68.20	Peak
5		5497.592	67.44	38.63	106.07	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

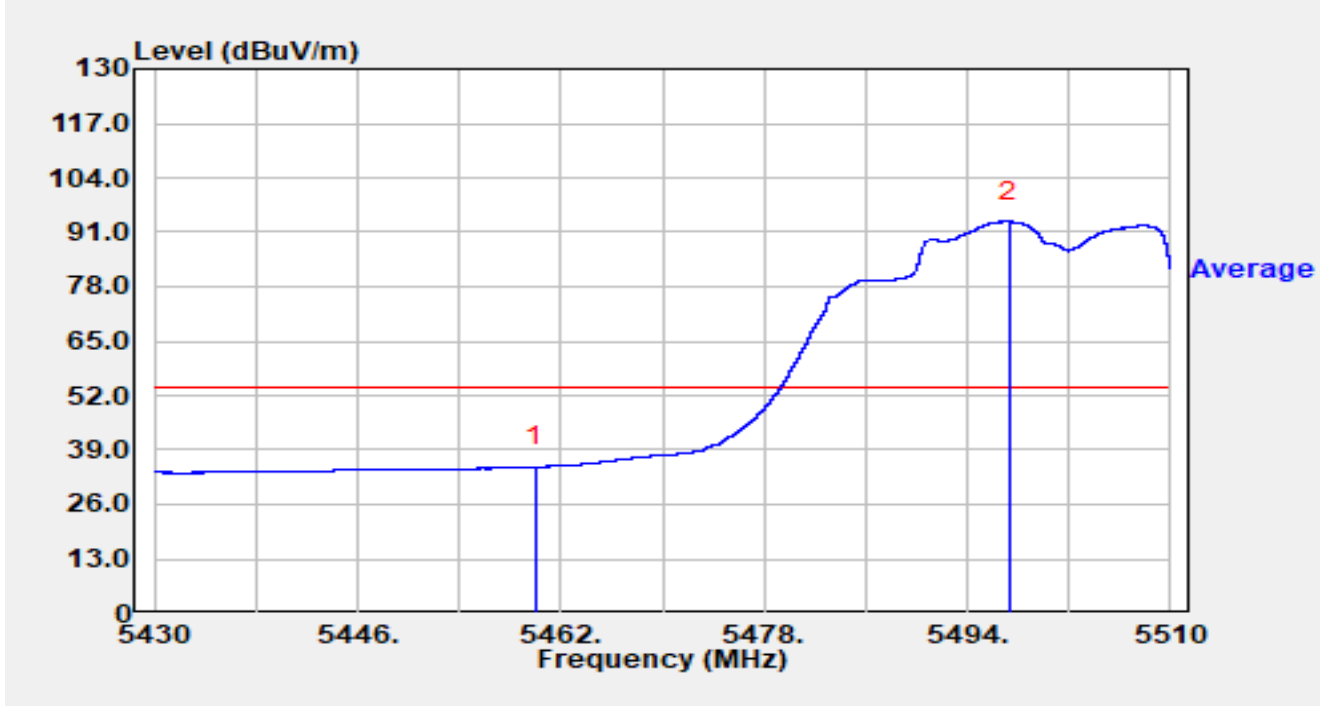


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	37.58	-2.55	35.03	-18.97	54.00	Average
2		5497.296	54.82	38.73	93.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

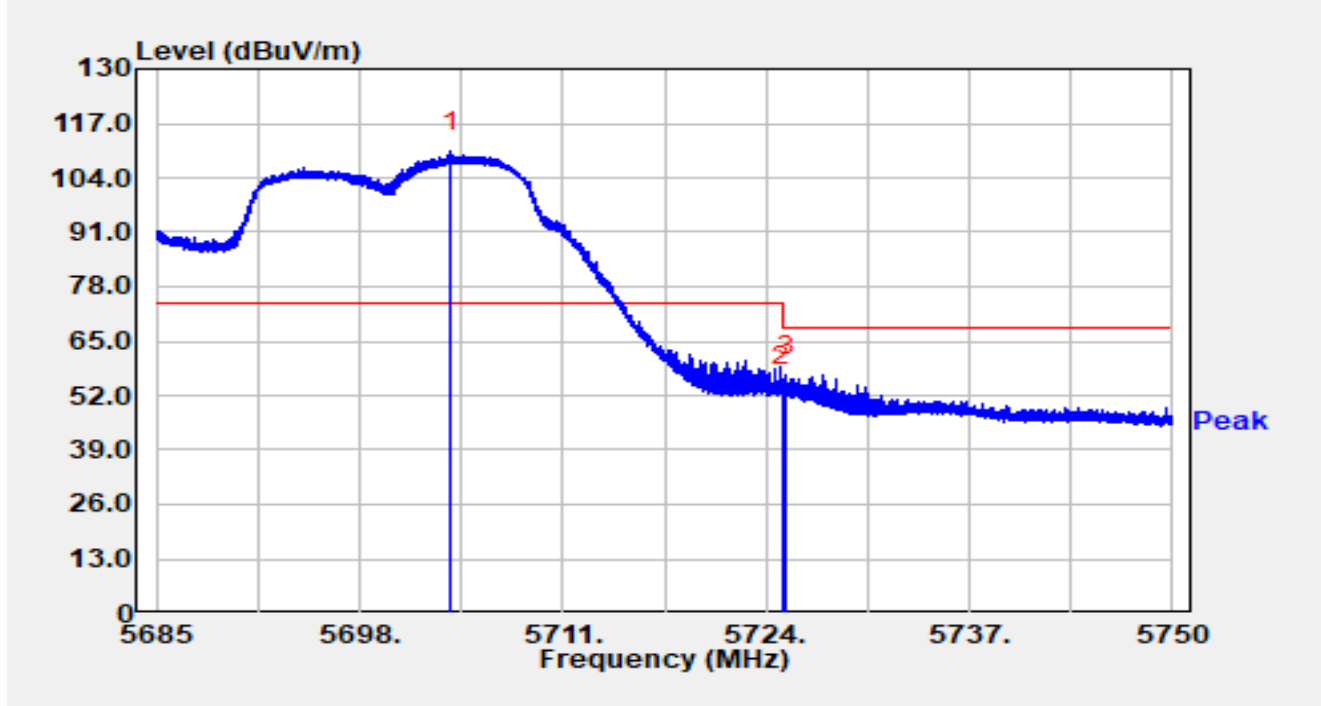


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.863	71.08	39.10	110.18	N/A	N/A	Peak
2		5725.000	55.12	-0.89	54.22	-13.98	68.20	Peak
3	*	5725.248	57.74	-1.03	56.70	-11.50	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

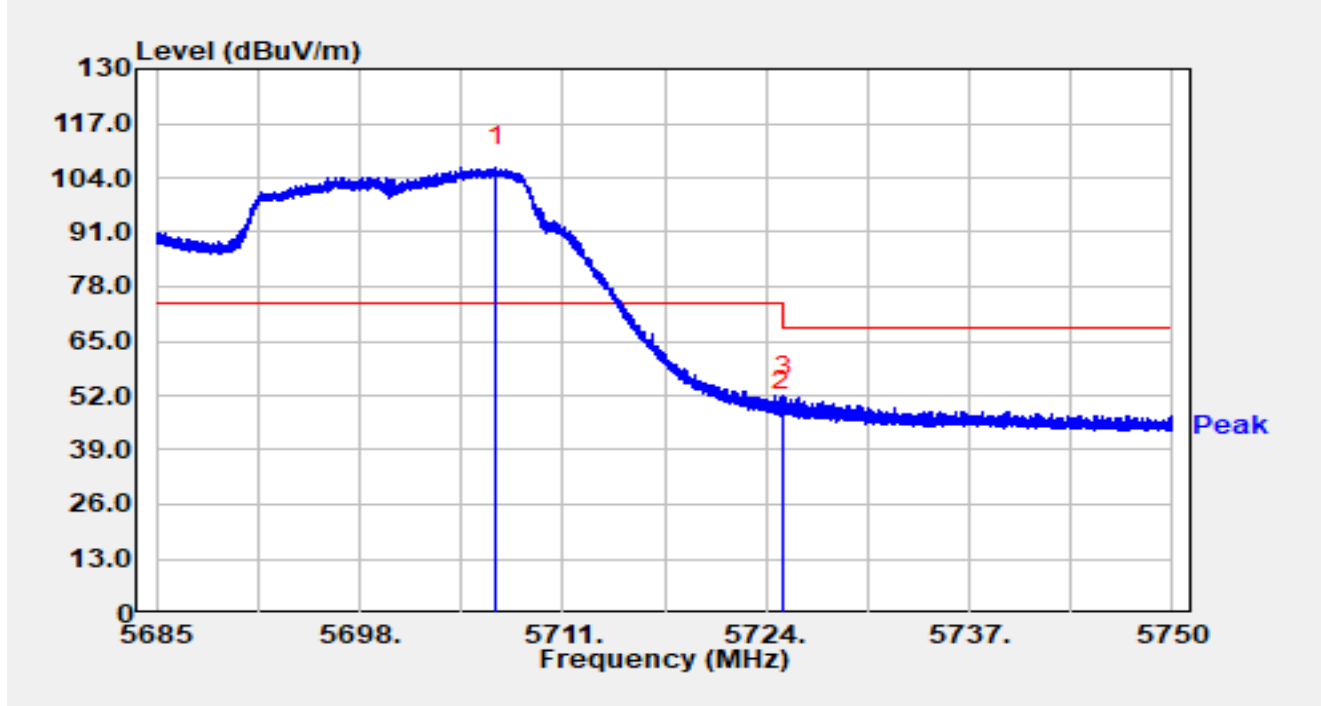


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5706.736	66.61	39.96	106.57	N/A	N/A	Peak
2		5725.000	49.17	-0.89	48.28	-19.92	68.20	Peak
3	*	5725.079	52.84	-0.94	51.90	-16.30	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

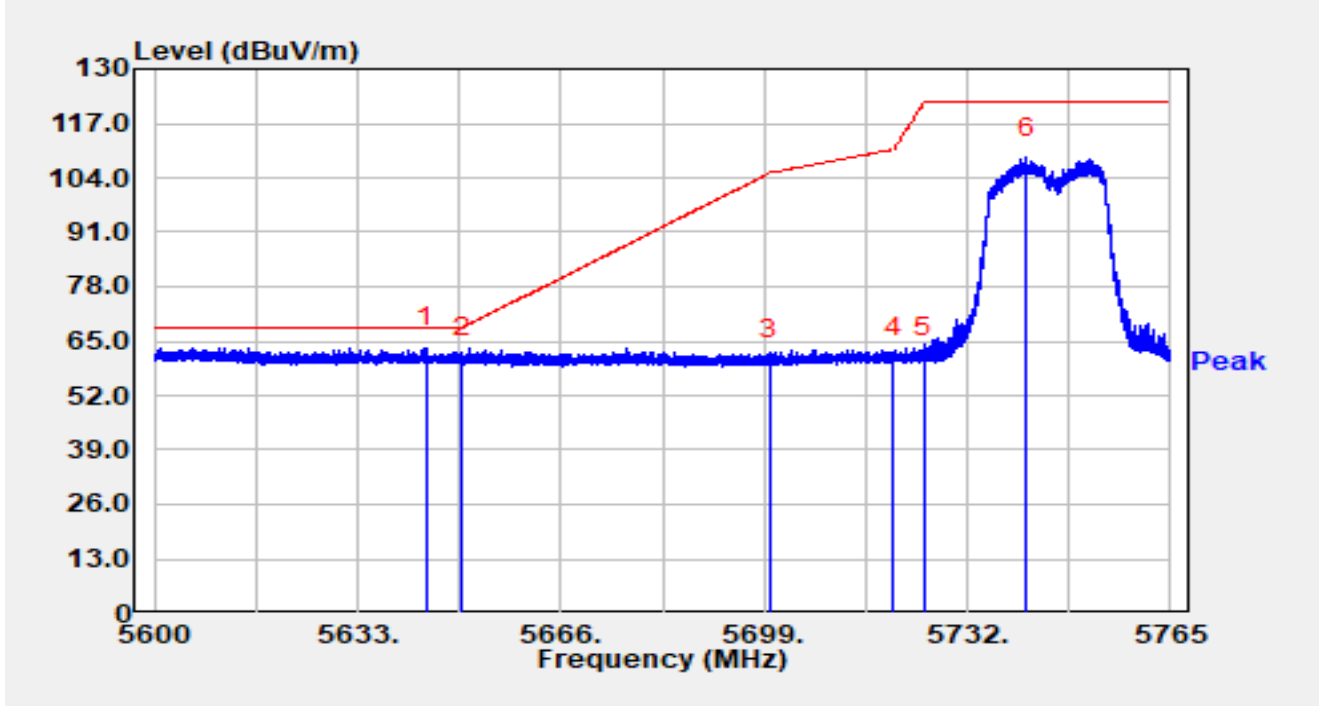


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.088	56.84	6.56	63.40	-4.80	68.20	Peak
2		5650.000	54.46	6.63	61.09	-7.11	68.20	Peak
3		5700.000	54.08	6.54	60.62	-44.58	105.20	Peak
4		5720.000	54.24	6.74	60.98	-49.82	110.80	Peak
5		5725.000	54.36	6.75	61.11	-61.09	122.20	Peak
6		5741.620	102.42	6.44	108.86	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

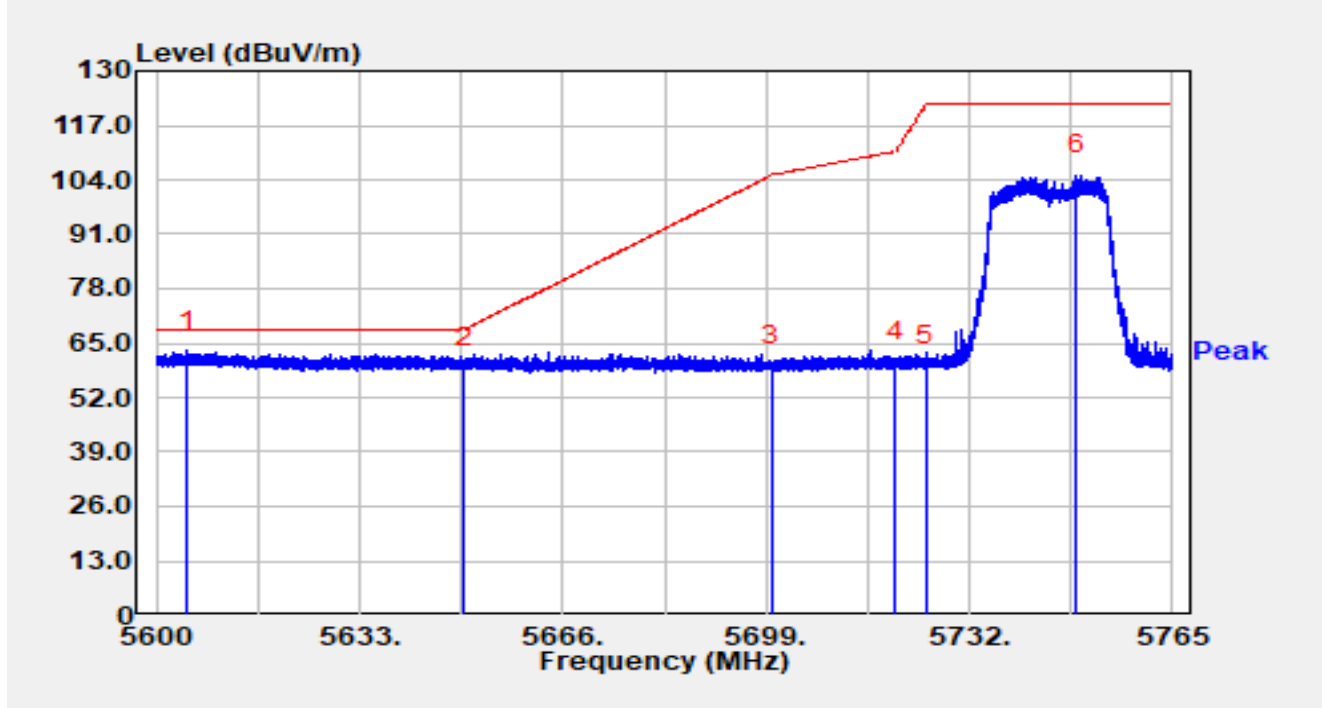


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5604.966	55.89	7.28	63.17	-5.03	68.20	Peak
2		5650.000	52.49	6.63	59.11	-9.09	68.20	Peak
3		5700.000	52.88	6.54	59.42	-45.78	105.20	Peak
4		5720.000	53.74	6.74	60.47	-50.33	110.80	Peak
5		5725.000	52.90	6.75	59.64	-62.56	122.20	Peak
6		5749.292	98.36	6.62	104.98	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

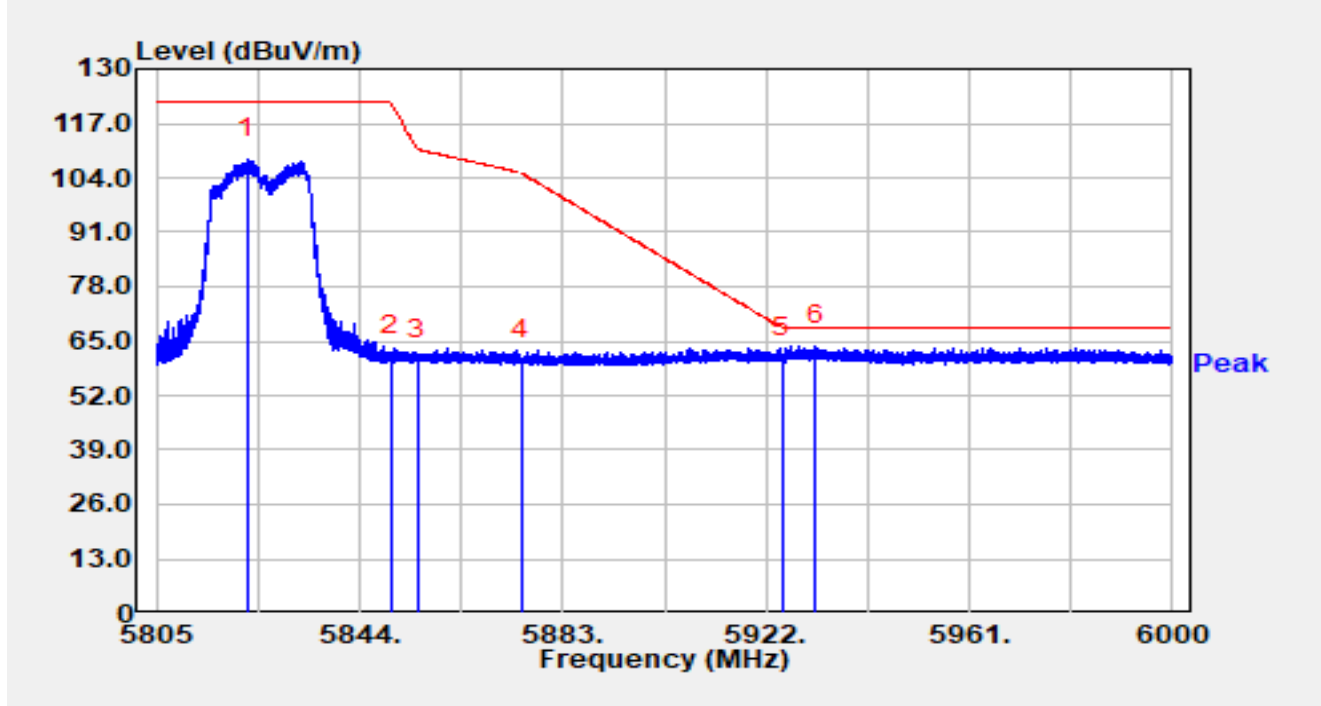


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.492	101.93	6.70	108.63	N/A	N/A	Peak
2		5850.000	54.49	7.00	61.49	-60.71	122.20	Peak
3		5855.000	53.62	7.06	60.68	-50.12	110.80	Peak
4		5875.000	53.59	6.81	60.40	-44.80	105.20	Peak
5		5925.000	53.08	7.88	60.96	-7.24	68.20	Peak
6	*	5931.399	55.88	7.94	63.82	-4.38	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

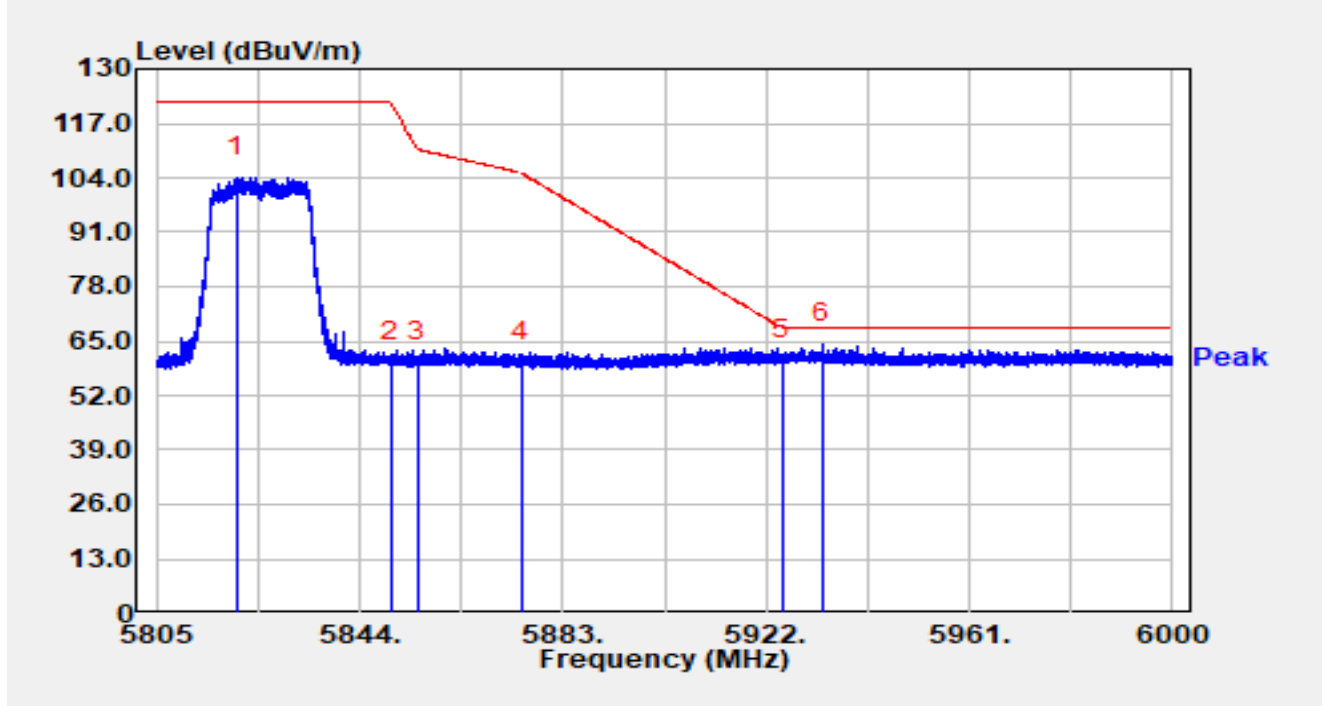


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.366	97.31	6.69	104.01	N/A	N/A	Peak
2		5850.000	53.05	7.00	60.05	-62.15	122.20	Peak
3		5855.000	53.23	7.06	60.29	-50.51	110.80	Peak
4		5875.000	53.21	6.81	60.02	-45.18	105.20	Peak
5		5925.000	52.53	7.88	60.41	-7.79	68.20	Peak
6	*	5932.667	56.43	7.86	64.29	-3.91	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

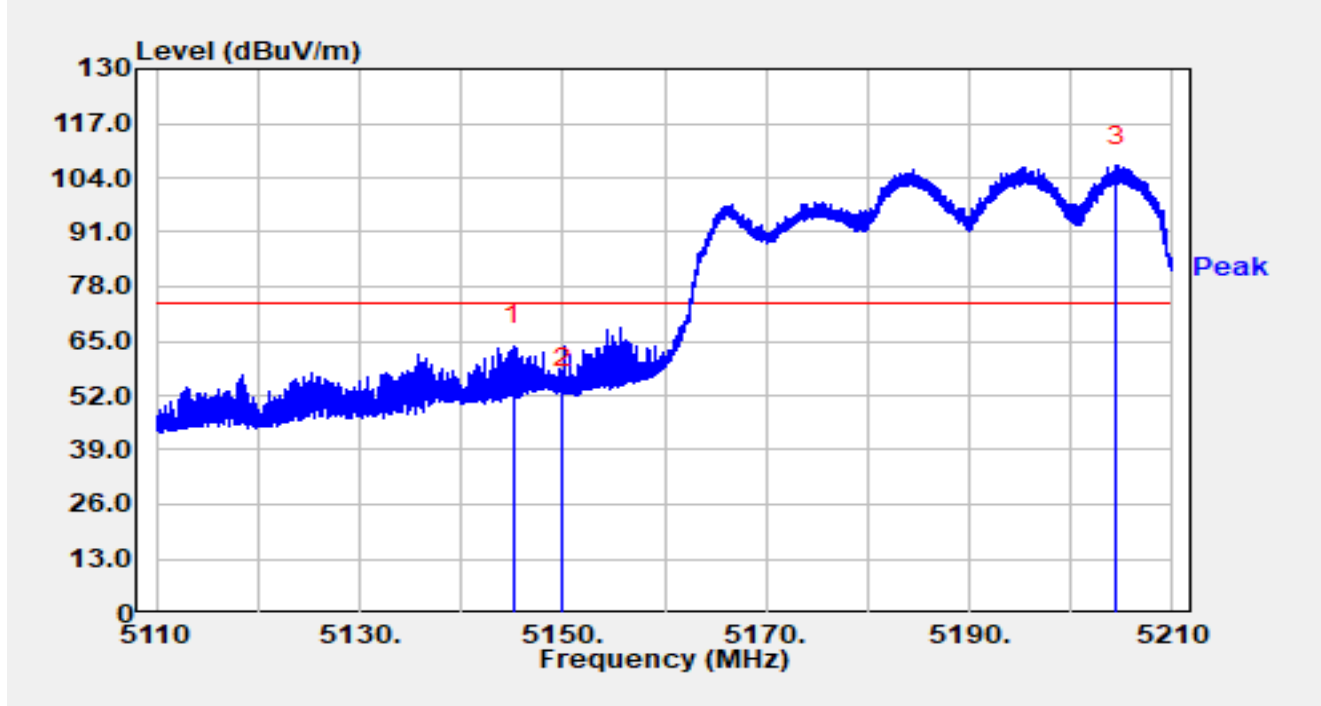


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.170	66.95	-3.01	63.94	-10.06	74.00	Peak
2		5150.000	55.76	-2.21	53.55	-20.45	74.00	Peak
3		5204.510	64.58	42.25	106.84	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

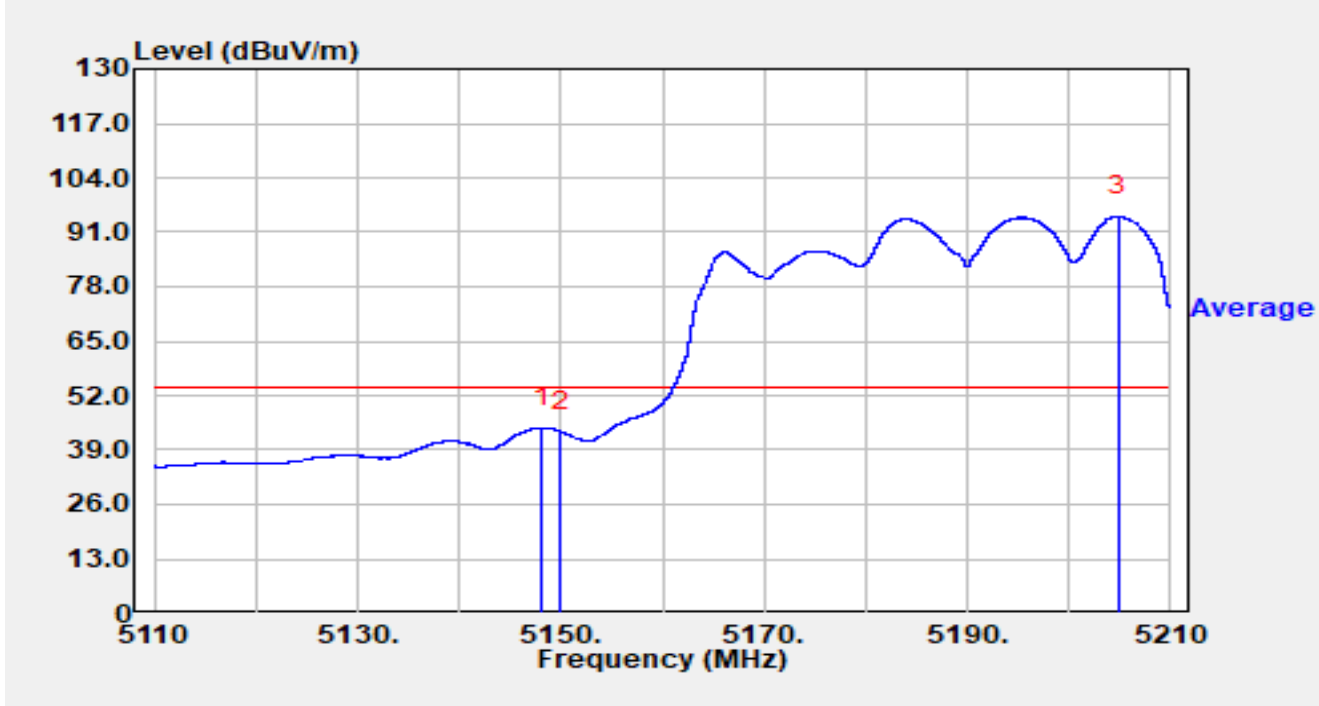


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.120	46.95	-2.57	44.38	-9.62	54.00	Average
2		5150.000	45.56	-2.21	43.35	-10.65	54.00	Average
3		5204.810	53.13	41.77	94.90	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

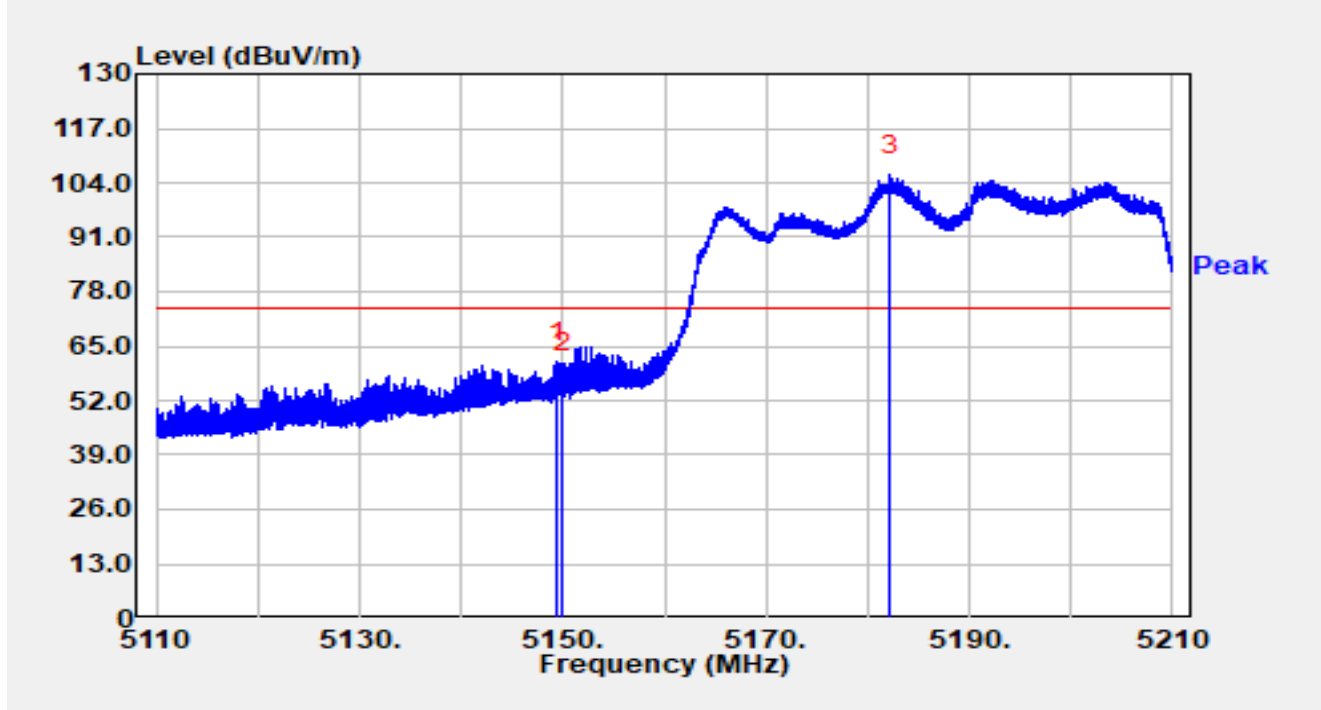


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.400	63.49	-2.34	61.15	-12.85	74.00	Peak
2		5150.000	60.73	-2.21	58.52	-15.48	74.00	Peak
3		5182.240	65.83	40.09	105.92	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

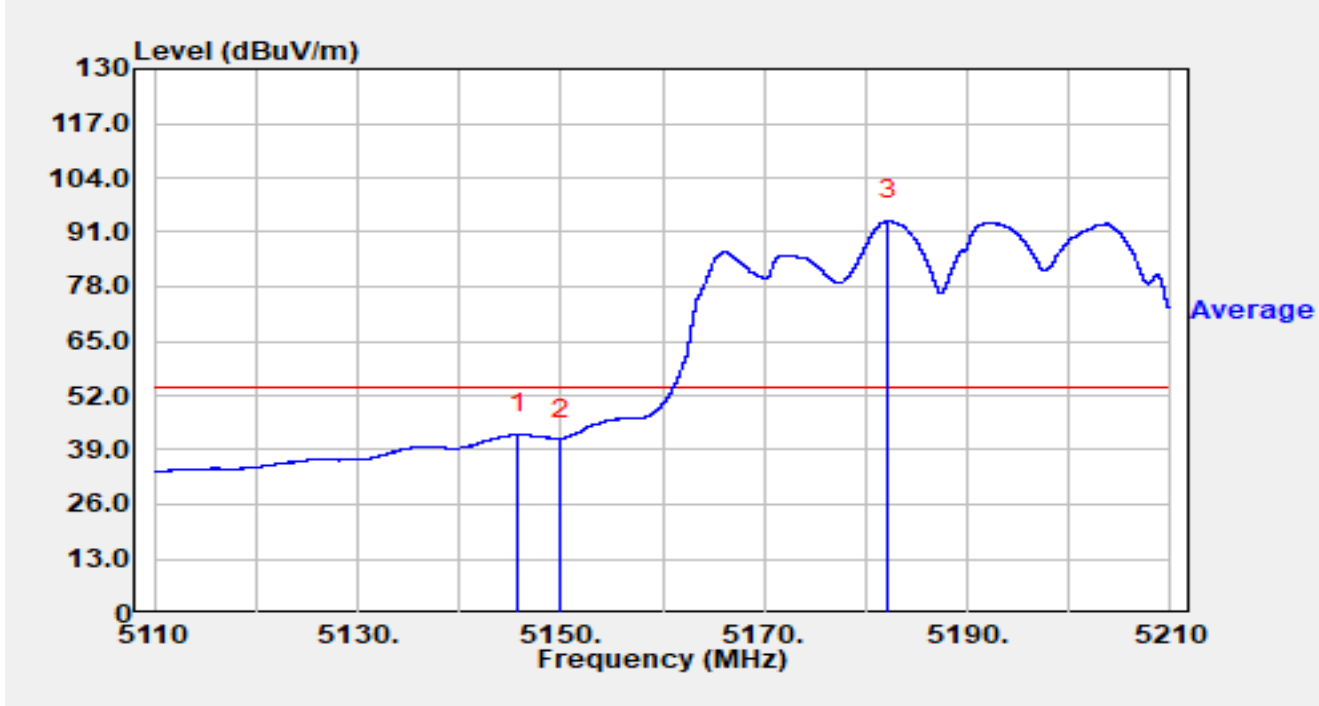


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.730	45.62	-2.94	42.68	-11.32	54.00	Average
2		5150.000	43.88	-2.21	41.67	-12.33	54.00	Average
3		5182.210	53.60	40.15	93.76	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

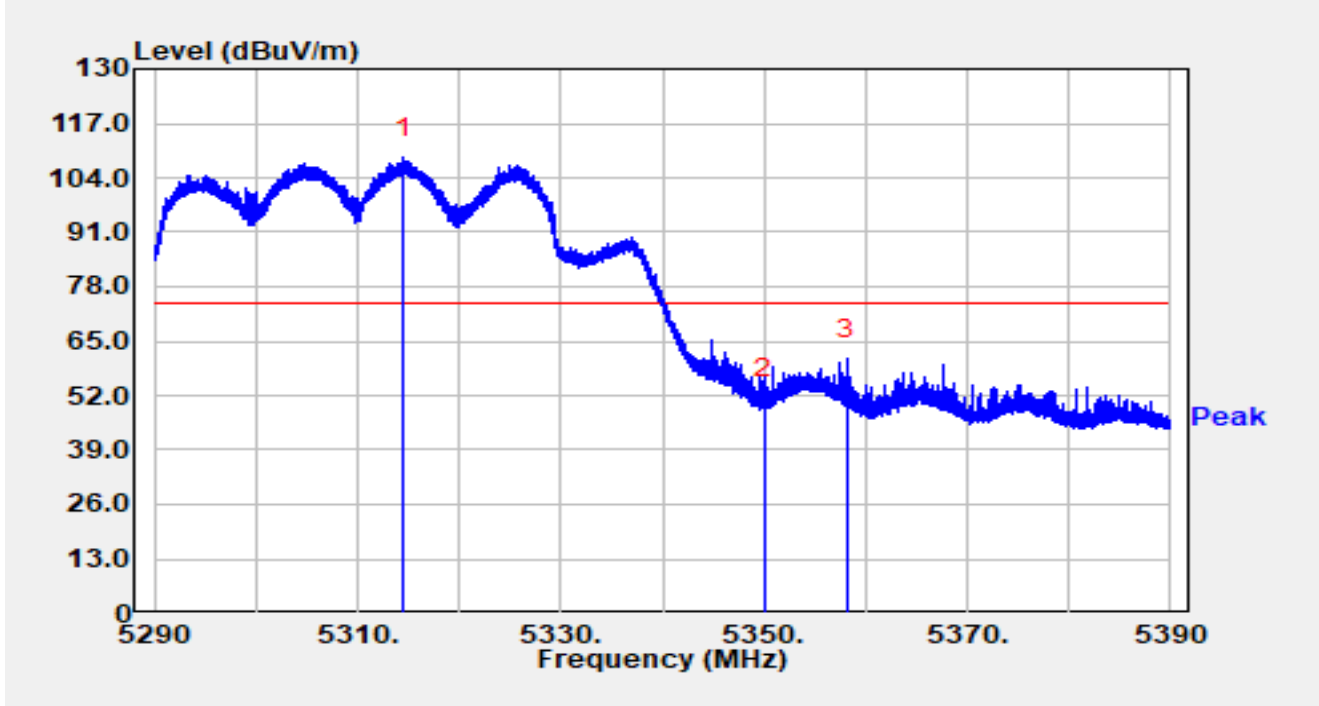


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.490	61.79	46.92	108.71	N/A	N/A	Peak
2		5350.000	52.88	-1.38	51.51	-22.49	74.00	Peak
3	*	5358.170	64.13	-3.48	60.65	-13.35	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

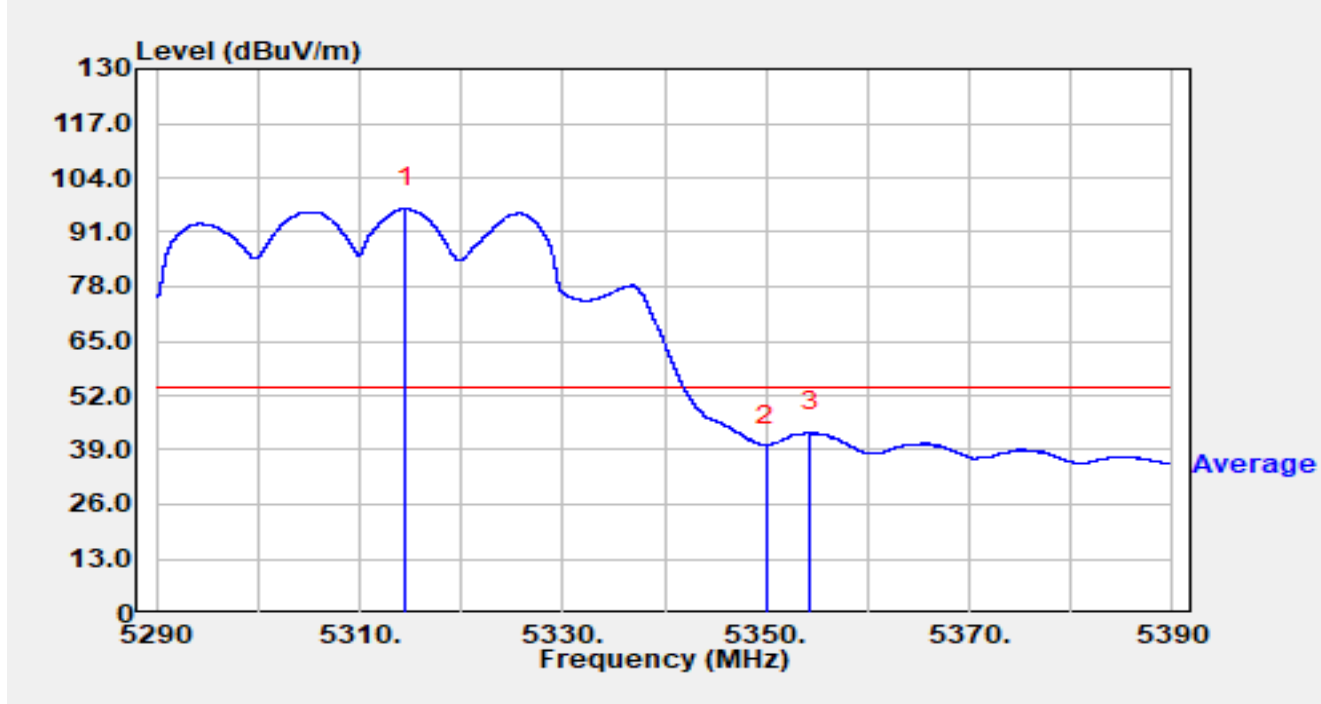


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.480	49.72	46.92	96.65	N/A	N/A	Average
2		5350.000	41.46	-1.38	40.08	-13.92	54.00	Average
3	*	5354.340	46.12	-2.90	43.22	-10.78	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

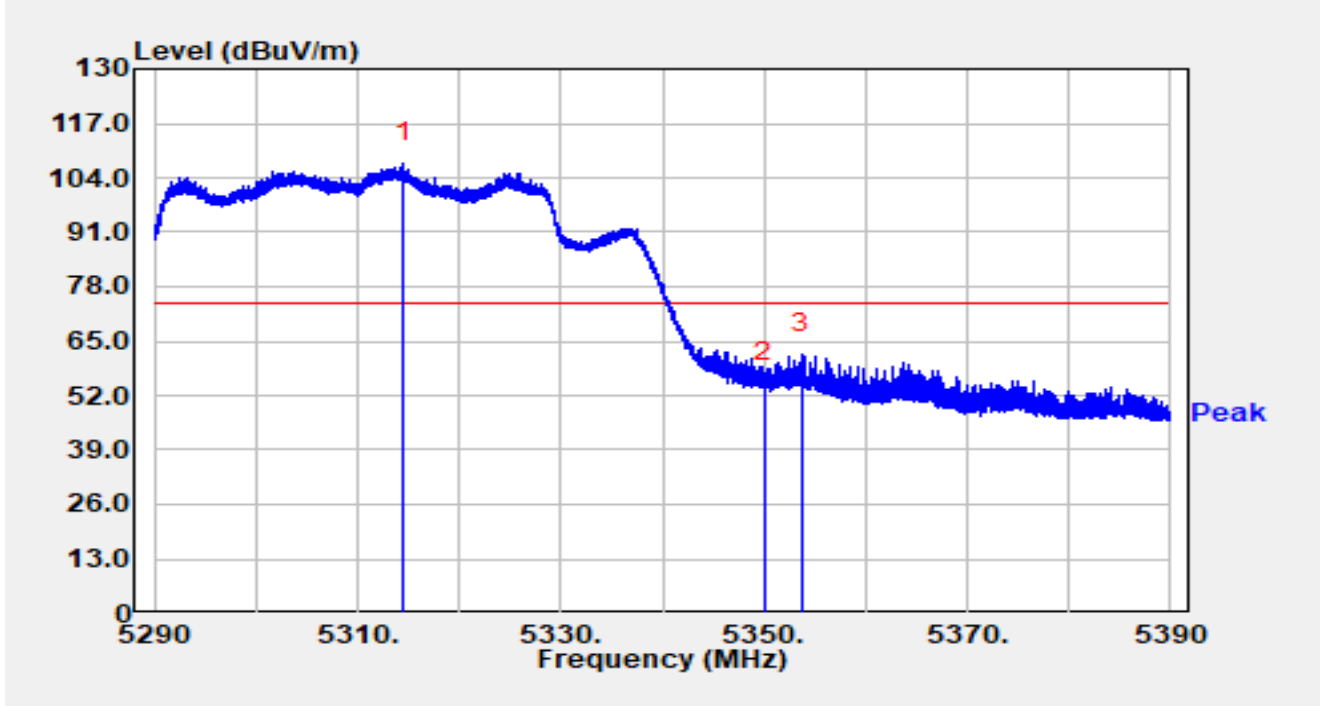


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.540	60.70	46.83	107.53	N/A	N/A	Peak
2		5350.000	56.55	-1.38	55.17	-18.83	74.00	Peak
3	*	5353.700	64.57	-2.76	61.82	-12.18	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

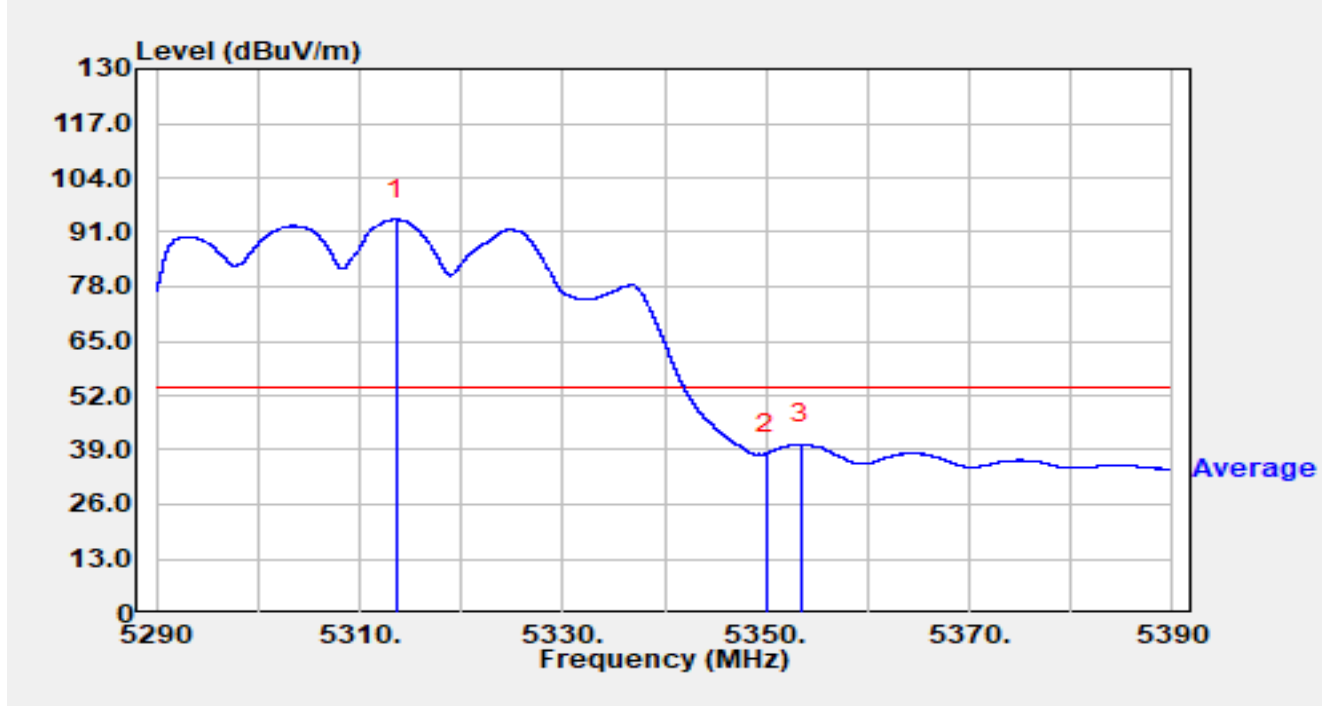


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.600	46.49	47.65	94.14	N/A	N/A	Average
2		5350.000	39.64	-1.38	38.26	-15.74	54.00	Average
3	*	5353.460	43.10	-2.69	40.41	-13.59	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

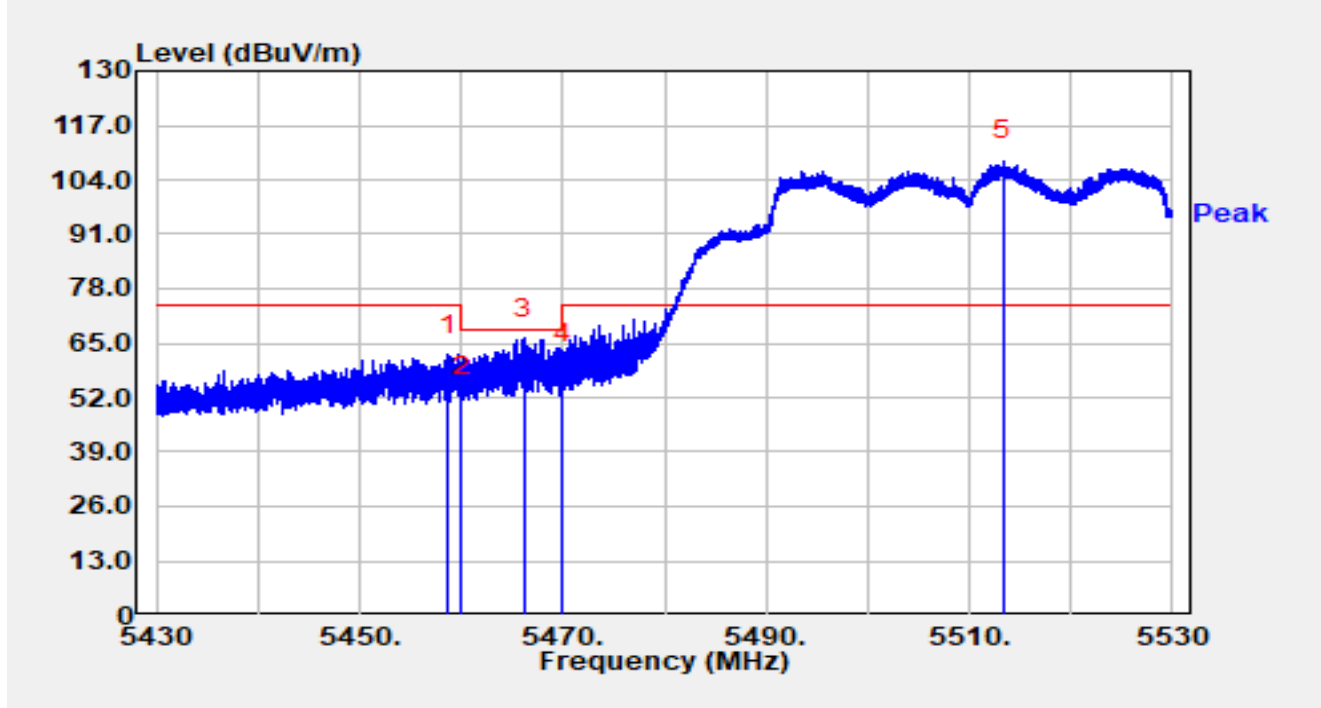


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.650	64.81	-2.68	62.13	-11.87	74.00	Peak
2		5460.000	54.79	-2.55	52.24	-15.96	68.20	Peak
3	*	5466.230	67.91	-1.84	66.07	-2.13	68.20	Peak
4		5470.000	60.67	-0.76	59.91	-8.29	68.20	Peak
5		5513.320	65.93	42.65	108.58	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

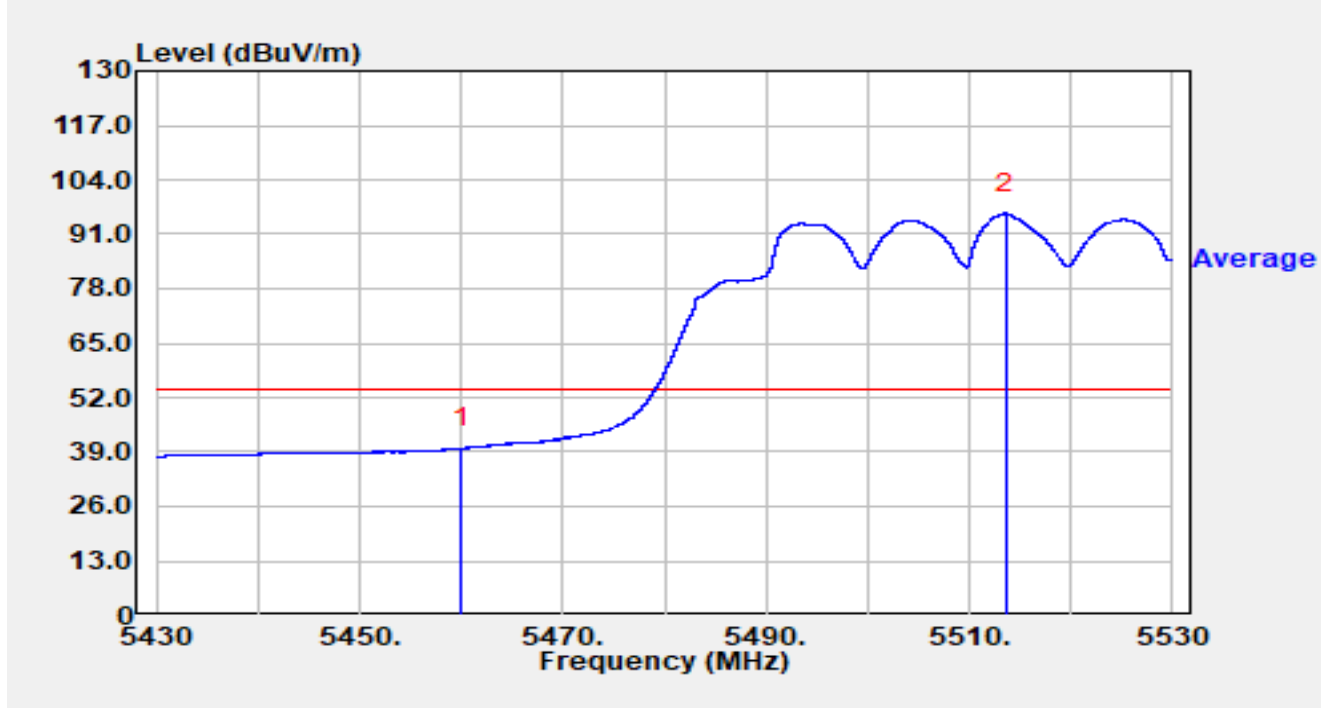


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	42.41	-2.55	39.85	-14.15	54.00	Average
2		5513.540	53.03	42.90	95.92	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

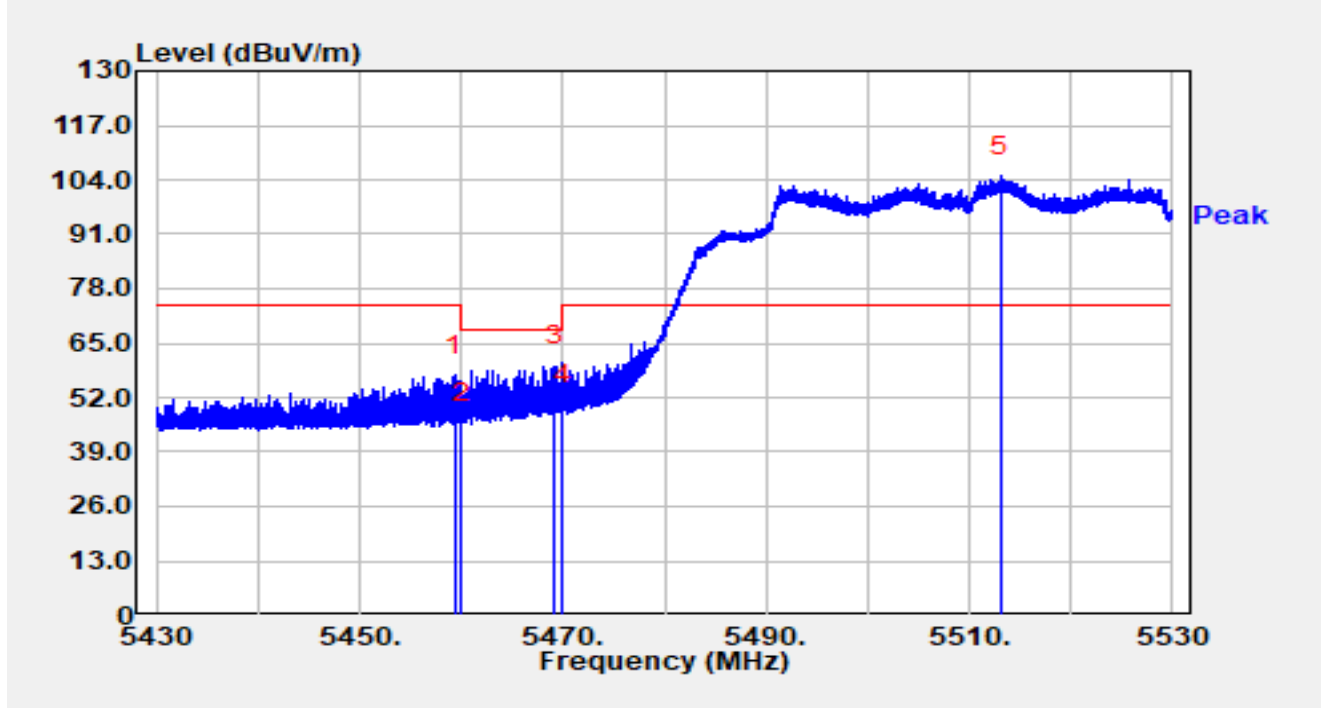


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.350	60.03	-2.64	57.39	-16.61	74.00	Peak
2		5460.000	48.50	-2.55	45.95	-22.25	68.20	Peak
3	*	5469.160	60.51	-1.01	59.50	-8.70	68.20	Peak
4		5470.000	51.26	-0.76	50.50	-17.70	68.20	Peak
5		5513.040	62.53	42.30	104.84	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

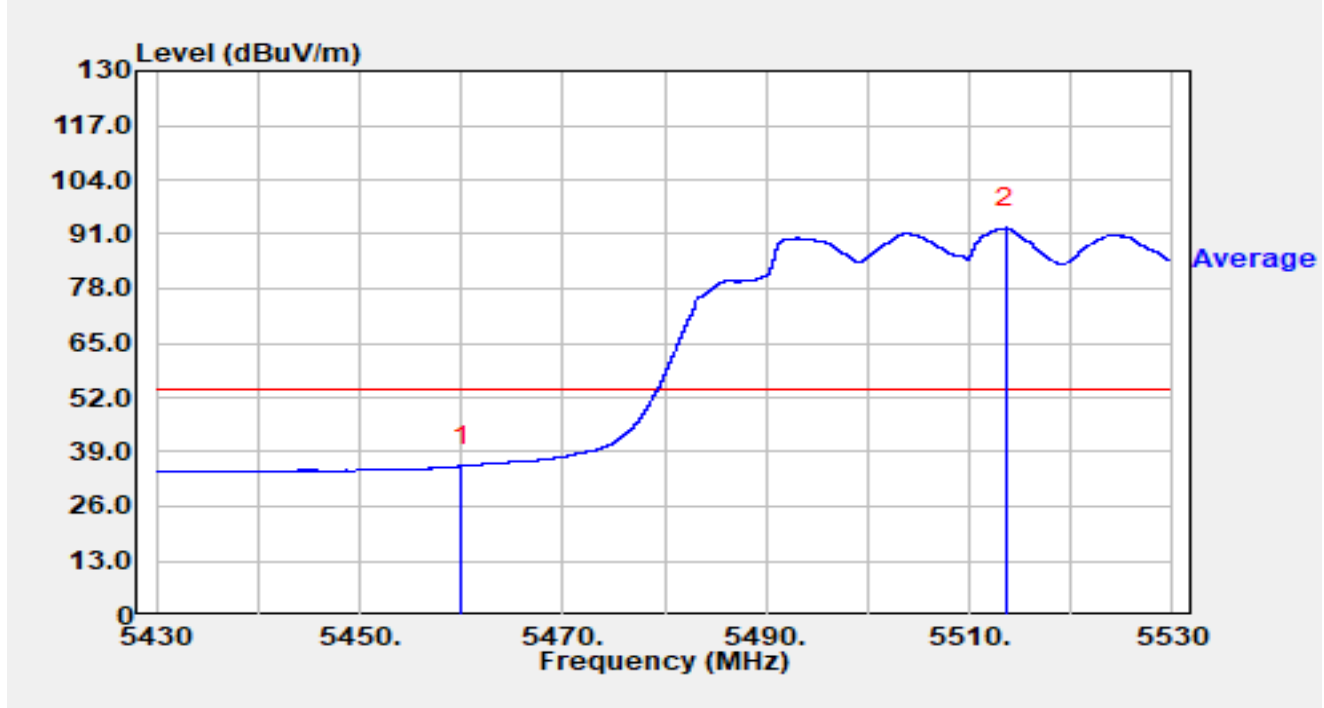


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	38.23	-2.55	35.68	-18.32	54.00	Average
2		5513.600	49.52	42.96	92.48	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

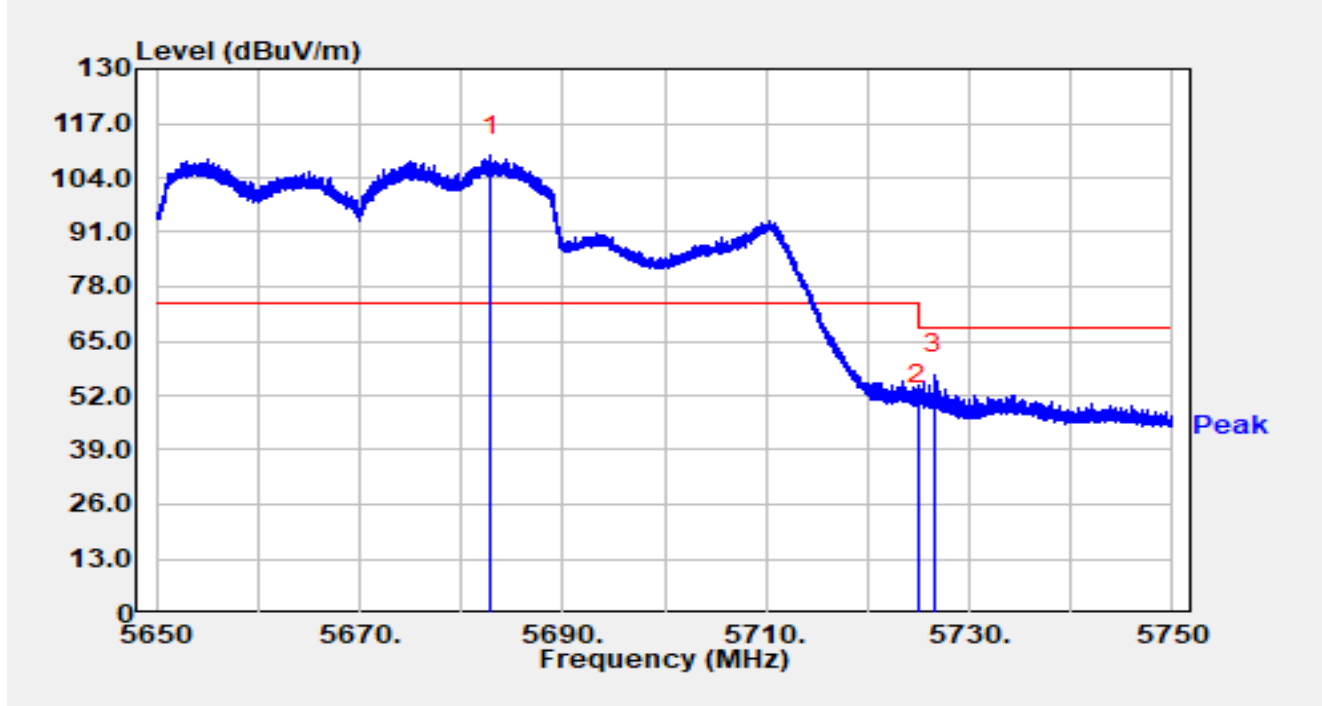


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5682.890	64.39	44.80	109.20	N/A	N/A	Peak
2		5725.000	50.86	-0.89	49.97	-18.23	68.20	Peak
3	*	5726.570	58.64	-1.67	56.97	-11.23	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

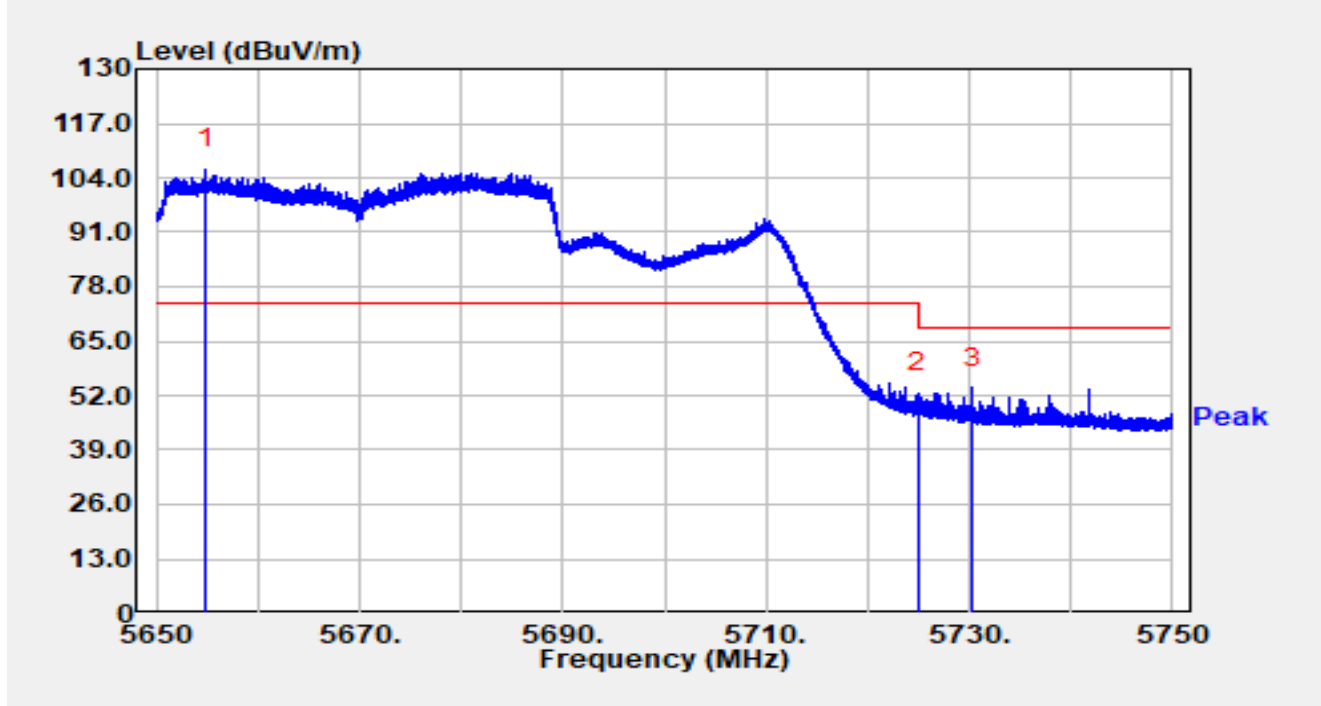


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5654.930	65.45	40.52	105.97	N/A	N/A	Peak
2		5725.000	53.48	-0.89	52.59	-15.61	68.20	Peak
3	*	5730.350	56.52	-2.72	53.80	-14.40	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

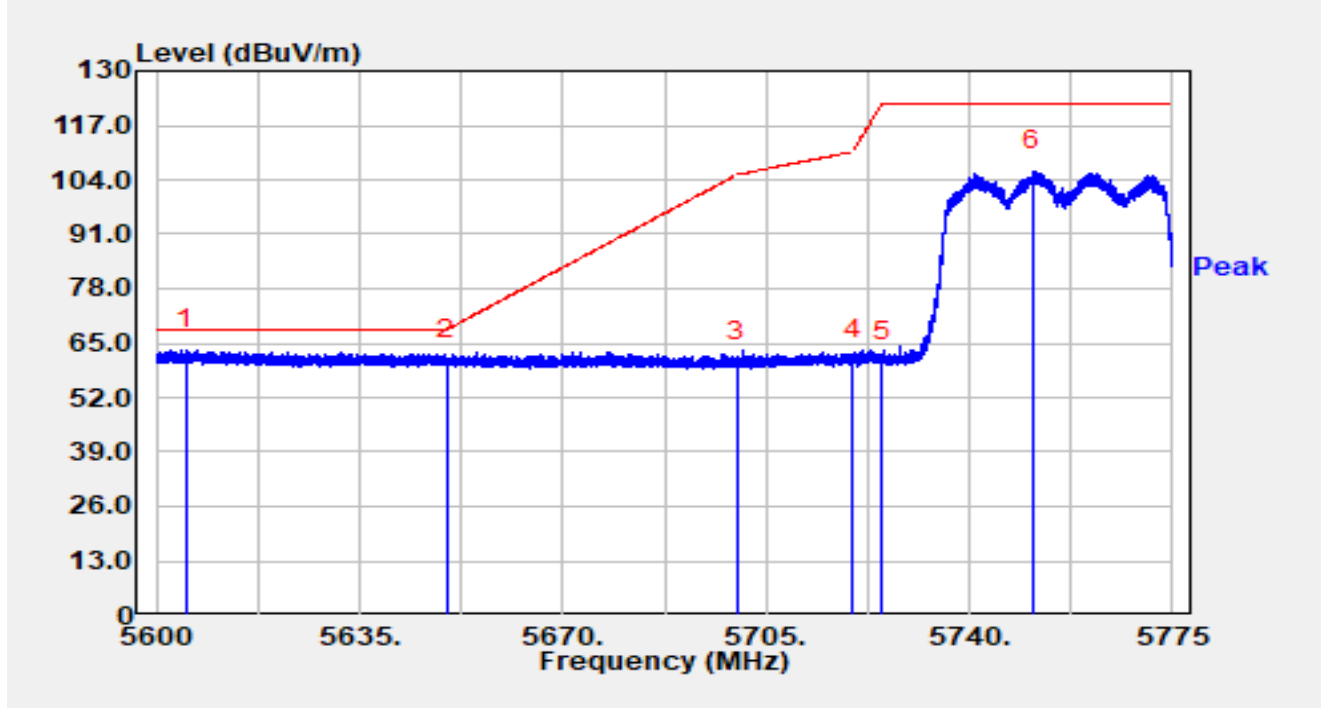


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5605.180	56.16	7.29	63.45	-4.75	68.20	Peak
2		5650.000	54.42	6.63	61.05	-7.15	68.20	Peak
3		5700.000	53.86	6.54	60.40	-44.80	105.20	Peak
4		5720.000	54.18	6.74	60.91	-49.89	110.80	Peak
5		5725.000	54.03	6.75	60.78	-61.42	122.20	Peak
6		5750.833	99.35	6.68	106.02	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

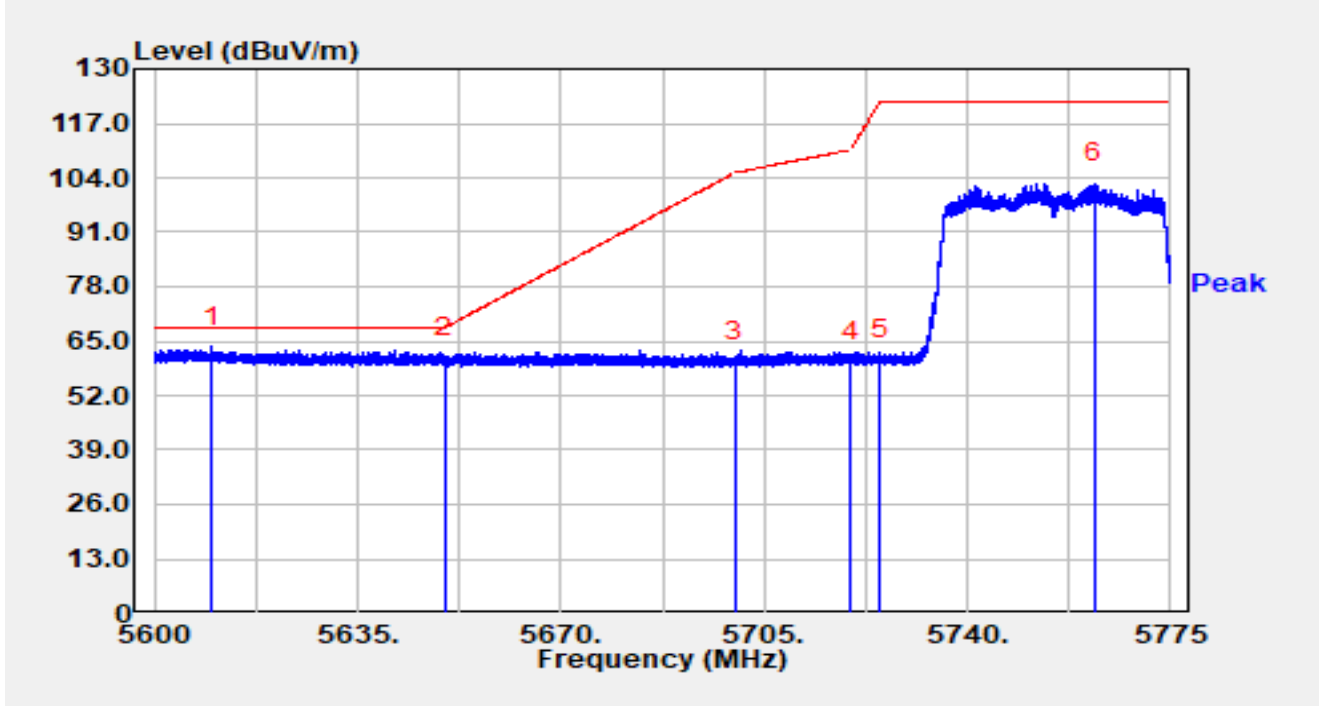


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5609.958	56.37	7.21	63.58	-4.62	68.20	Peak
2		5650.000	54.57	6.63	61.20	-7.00	68.20	Peak
3		5700.000	53.35	6.54	59.89	-45.31	105.20	Peak
4		5720.000	53.37	6.74	60.10	-50.70	110.80	Peak
5		5725.000	53.62	6.75	60.37	-61.83	122.20	Peak
6		5761.910	95.79	6.90	102.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

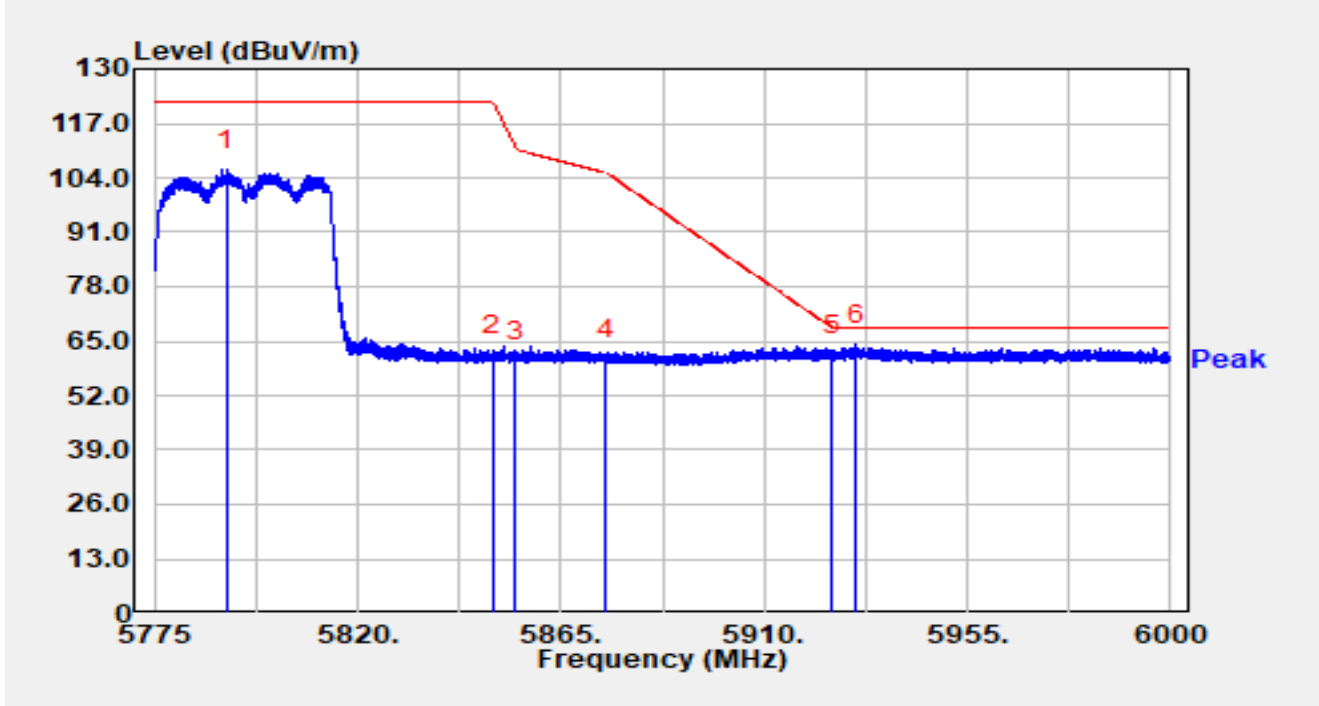


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.065	99.54	6.38	105.92	N/A	N/A	Peak
2		5850.000	54.33	7.00	61.33	-60.87	122.20	Peak
3		5855.000	53.18	7.06	60.25	-50.55	110.80	Peak
4		5875.000	53.79	6.81	60.60	-44.61	105.20	Peak
5		5925.000	53.79	7.88	61.67	-6.53	68.20	Peak
6	*	5930.362	56.17	8.01	64.18	-4.02	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

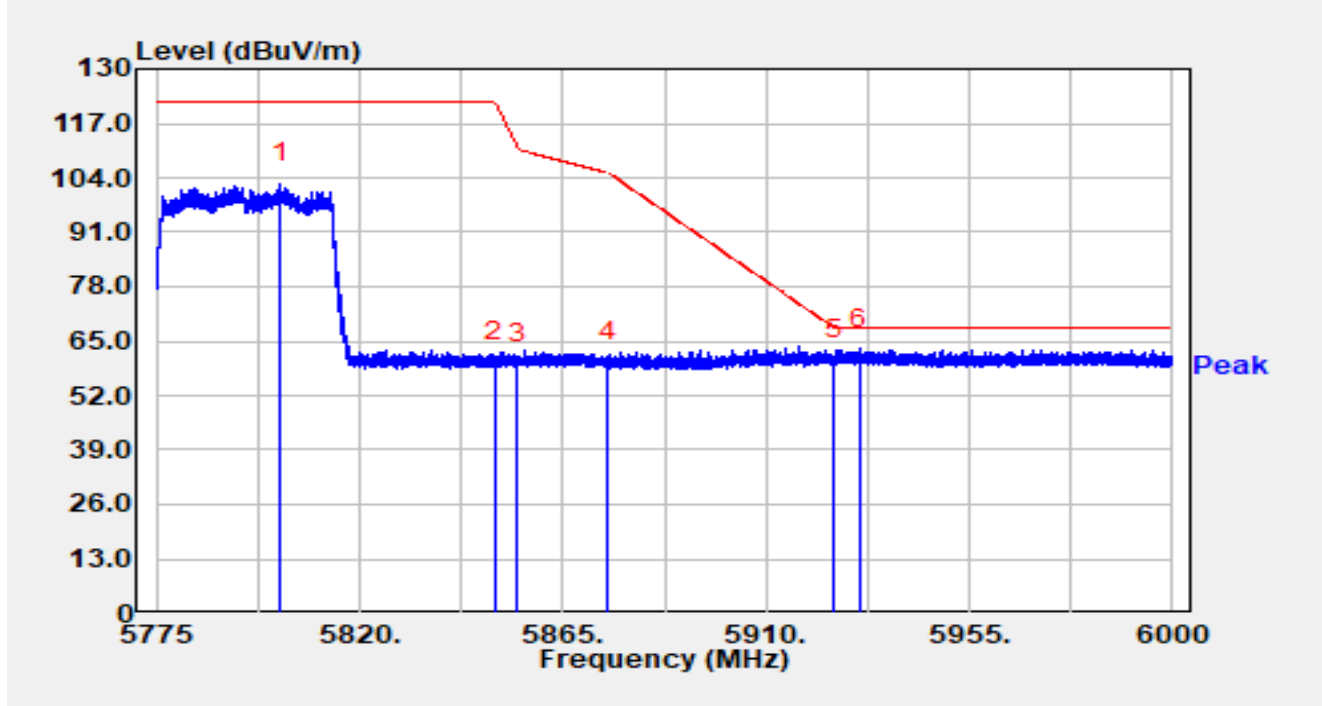

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5802.450	96.15	6.54	102.69	N/A	N/A	Peak
2		5850.000	53.01	7.00	60.01	-62.19	122.20	Peak
3		5855.000	52.48	7.06	59.54	-51.26	110.80	Peak
4		5875.000	53.34	6.81	60.15	-45.05	105.20	Peak
5		5925.000	52.79	7.88	60.67	-7.53	68.20	Peak
6	*	5930.678	55.16	7.99	63.15	-5.05	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).