



RF MEASUREMENT REPORT

FCC ID: HD5-EDA560

Applicant: Honeywell International Inc
Honeywell Safety and Productivity Solutions

Product: Mobile Computer

Model No.: EDA56-0

Trademark: Honeywell

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Test Date: 2022-04-28 ~ 2022-06-09

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU084-U4	Rev. 01	Initial Report	2022-06-11	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification	7
1.6. Antenna Details	8
1.7. Working Frequencies	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test System Connection Diagram	11
2.3. Test Software	11
2.4. Applied Standards	12
2.5. Test Environment Condition	12
3. Antenna Requirements	13
4. Measuring Instrument	14
5. Decision Rules and Measurement Uncertainty	16
5.1. Decision Rules	16
5.2. Measurement Uncertainty	16
6. Test Result	17
6.1. Summary	17
6.2. 26dB & 99% Bandwidth Measurement	18
6.2.1. Test Limit	18
6.2.2. Test Procedure	18
6.2.3. Test Setting	18
6.2.4. Test Setup	19
6.2.5. Test Result	19
6.3. 6dB Bandwidth Measurement	20
6.3.1. Test Limit	20
6.3.2. Test Procedure	20
6.3.3. Test Setting	20
6.3.4. Test Setup	21
6.3.5. Test Result	21
6.4. Output Power Measurement	22
6.4.1. Test Limit	22

6.4.2.	Test Procedure	22
6.4.3.	Test Setting	22
6.4.4.	Test Setup.....	22
6.4.5.	Test Result	22
6.5.	Transmit Power Control Measurement.....	23
6.5.1.	Test Limit.....	23
6.5.2.	Test Procedure	23
6.5.3.	Test Setting	23
6.5.4.	Test Setup.....	23
6.5.5.	Test Result	23
6.6.	Power Spectral Density Measurement	24
6.6.1.	Test Limit.....	24
6.6.2.	Test Procedure	24
6.6.3.	Test Setting	24
6.6.4.	Test Setup.....	25
6.6.5.	Test Result	25
6.7.	Frequency Stability Measurement.....	26
6.7.1.	Test Limit.....	26
6.7.2.	Test Procedure	26
6.7.3.	Test Setup.....	26
6.7.4.	Test Result	27
6.8.	Radiated Spurious Emission Measurement	28
6.8.1.	Test Limit.....	28
6.8.2.	Test Procedure	28
6.8.3.	Test Setting	28
6.8.4.	Test Setup.....	30
6.8.5.	Test Result	30
6.9.	Radiated Restricted Band Edge Measurement.....	31
6.9.1.	Test Limit.....	31
6.9.2.	Test Procedure	33
6.9.3.	Test Setting	33
6.9.4.	Test Setup.....	34
6.9.5.	Test Result	34
6.10.	AC Conducted Emissions Measurement.....	35
6.10.1.	Test Limit.....	35
6.10.2.	Test Setup.....	35
6.10.3.	Test Result	35
Appendix A – Test Result.....		36
A.1	Duty Cycle Test Result.....	36

A.2	26dB & 99% Bandwidth Test Result	39
A.3	6dB Bandwidth Test Result	100
A.4	Output Power Test Result	115
A.5	Power Spectral Density Test Result.....	131
A.6	Frequency Stability Test Result.....	275
A.7	Radiated Spurious Emission Test Result.....	276
A.8	Radiated Restricted Band Edge Test Result.....	549
A.9	AC Conducted Emissions Test Result	1233
Appendix B – Test Setup Photograph		1235
Appendix C – EUT Photograph		1236

1. General Information

1.1. Applicant

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Bales Road, Fort Mill, SC 29707 United States

1.2. Manufacturer

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Bales Road, Fort Mill, SC 29707 United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☒	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Mobile Computer
Model No.	EDA56-0
Serial No	22083B5009 For radiated testing 22083B494F For conducted testing
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	v5.1 dual mode
NFC Specification	13.56MHz
Antenna Information	Refer to section 1.6
Accessories	
Adapter	Model Name: ADS-12B-06 05010E INPUT: 100~240V-50/60Hz Max 0.3A OUTPUT: 5V 2A 10.0W
Rechargeable Li-ion Battery	Model Name: EDA52-BAT-US Rating: 4500mAh/17.1Wh/3.8V
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Resource Units	802.11ax-HE20 (RU 26/52/106/242) 802.11ax-HE40 (RU 26/52/106/242/484) 802.11ax-HE80 (RU 26/52/106/242/484/996)
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps
Remark: Wi-Fi specification support SISO and MIMO function.	

1.6. Antenna Details

Antenna Type	Frequency Band (GHz)	Ant 1 Max Peak Gain (dBi)	Ant 2 Max Peak Gain (dBi)	Directional Gain (dBi)	
				For Power	For PSD
Wi-Fi Antenna (2*2 MIMO)					
PIFA	2.4 ~ 2.5	1.36	2.51	2.51	5.52
	5.15 ~ 5.25	0.98	2.78	2.78	5.79
	5.25 ~ 5.35	1.63	3.42	3.42	6.43
	5.47 ~ 5.725	2.15	2.26	2.26	5.27
	5.725 ~ 5.85	2.26	2.06	2.26	5.27

Note 1: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01$;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

Note 2: The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Beamforming Directional Gain = CDD Directional Gain of PSD.

Note 3: For beamforming operation, software automatically backs power down based on a factor based on CDD power. Therefore, only the CDD mode was evaluated in this report.

1.7. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2. Test Configuration

2.1. Test Mode


Mode 1: Transmit by 802.11a (6Mbps) (SISO Mode)
Mode 2: Transmit by 802.11ac-VHT20 (MCS0) (SISO Mode)
Mode 3: Transmit by 802.11ac-VHT40 (MCS0) (SISO Mode)
Mode 4: Transmit by 802.11ac-VHT80 (MCS0) (SISO Mode)
Mode 5: Transmit by 802.11ax-HE20 (MCS0) (SISO Mode)
Mode 6: Transmit by 802.11ax-HE40 (MCS0) (SISO Mode)
Mode 7: Transmit by 802.11ax-HE80 (MCS0) (SISO Mode)
Mode 8: Transmit by 802.11a (6Mbps) (MIMO Mode)
Mode 9: Transmit by 802.11ac-VHT20 (MCS0) (MIMO Mode)
Mode 10: Transmit by 802.11ac-VHT40 (MCS0) (MIMO Mode)
Mode 11: Transmit by 802.11ac-VHT80 (MCS0) (MIMO Mode)
Mode 12: Transmit by 802.11ax-HE20 (MCS0) (MIMO Mode)
Mode 13: Transmit by 802.11ax-HE40 (MCS0) (MIMO Mode)
Mode 14: Transmit by 802.11ax-HE80 (MCS0) (MIMO Mode)

Note: 802.11n and 802.11ac have same modulation type and same power parameter, so we only show 802.11ac test data in report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

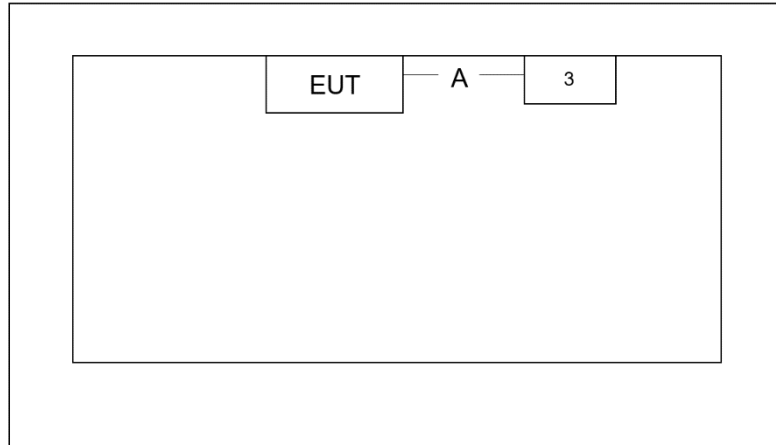

Cable Type		Cable Description	
A	USB Cable	Shielding, 1.5m	
Product		Manufacturer	Model No.
1	Notebook	Lenovo	E431

2.3. Test Software

The EUT could transmit or receive after entering engineer Order.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESL3	MRTSUE06576	1 year	2022-06-27	NS-SR2
Shielding Room	BOOMWAVE	NS-SR2	MRTSUE06551	N/A	N/A	NS-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06577	1 year	2022-07-04	NS-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06578	1 year	2022-07-04	NS-SR2
Thermohygrometer	DELI	NO.8813	MRTSUE06587	1 year	2022-06-30	NS-SR2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2022-10-20	NS-AC1
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2022-07-24	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06572	1 year	2023-04-01	NS-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2022-06-29	NS-AC1
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2022-07-12	NS-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06575	1 year	2022-06-27	NS-AC1
Thermohygrometer	DELI	NO.8813	MRTSUE06588	1 year	2022-06-30	NS-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2023-01-13	NS-AC1
Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2023-04-13	NS-AC1
Signal Analyzer	Keysight	N9020A	MRTSUE10065	1 year	2022-06-17	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2022-10-20	NS-AC1
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2022-07-24	NS-AC1
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022-12-29	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2022-09-16	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2022-11-12	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2023-04-21	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2023-06-06	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022-12-29	WZ-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11039	1 year	2022-11-11	WZ-AC1
Anechoic Chamber	TDK	WZ-AC2	MRTSUE06212	1 year	2023-04-21	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2022-06-28	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022-12-29	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2022-10-28	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2022-6-28	WZ-SR5
Directional Coupler	narda	4226-10	MRTSUE06562	1 year	2022-10-28	WZ-SR5
USB Power Sensor	Agilent	U2021XA	MRTSUE06030	1 year	2022-10-10	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11066	1 year	2023-06-09	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11093	1 year	2023-06-09	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2022-6-24	WZ-SR5

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
BenchVue Power Meter	2018.1	Power
Controller_T-E-TAC-2	1.02	RE Antenna & Turntable
Controller_MF 7802	2.03C	RE Antenna & Turntable
Agilent Power Panel	V R03.09.00	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(a)(1)(ii), (2), (3)(i), (12)	Peak Power Spectral Density		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions		Pass
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 802.11ax supports full RU and partial RU groups, the following worst case modes were selected for the final testing.

Test Description	Test Mode for RU configuration
Occupied Bandwidth	802.11ax-HE20 (RU 26//242), 802.11ax-HE40 (RU 26/484) 802.11ax-HE80 (RU 26/996)
Output Power	802.11ax-HE20 (RU 26/242), 802.11ax-HE40 (RU 26/484) 802.11ax-HE40 (RU 26/968)
Power Spectral Density	802.11ax-HE20 (RU 26/242), 802.11ax-HE40 (RU 26/484) 802.11ax-HE40 (RU 26/968)
Band Edge	802.11ax-HE20 (RU 26/242), 802.11ax-HE40 (RU 26/484) 802.11ax-HE40 (RU 26/968)
Undesirable Emissions	802.11ax-HE20 (RU 26/242), 802.11ax-HE40 (RU 26/484) 802.11ax-HE40 (RU 26/968)

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Partial RU 26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB relative to the maximum level measured in the fundamental emission.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

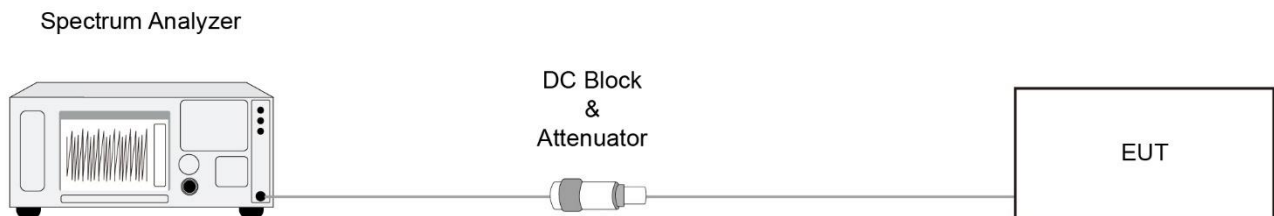6.2.4. Test Setup**6.2.5. Test Result**

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

Partial RU

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure

KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup



6.4.5. Test Result

Refer to Appendix A.4.

6.5. Transmit Power Control Measurement

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.

6.5.2. Test Procedure

KDB 789033 D02v01- Section II)E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.5.4. Test Setup



6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.6.2. Test Procedure


KDB 789033 D02v02r01-Section II)F)

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = $3 \times \text{RBW}$
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.

6.6.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.6.5. Test Result

Refer to Appendix A.5.

6.7. Frequency Stability Measurement

6.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.7.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.7.3. Test Setup

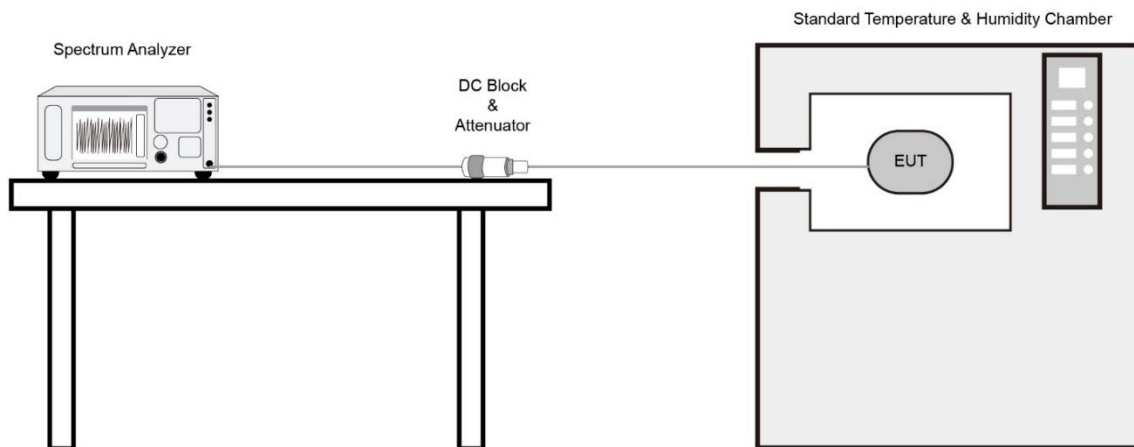

6.7.4. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

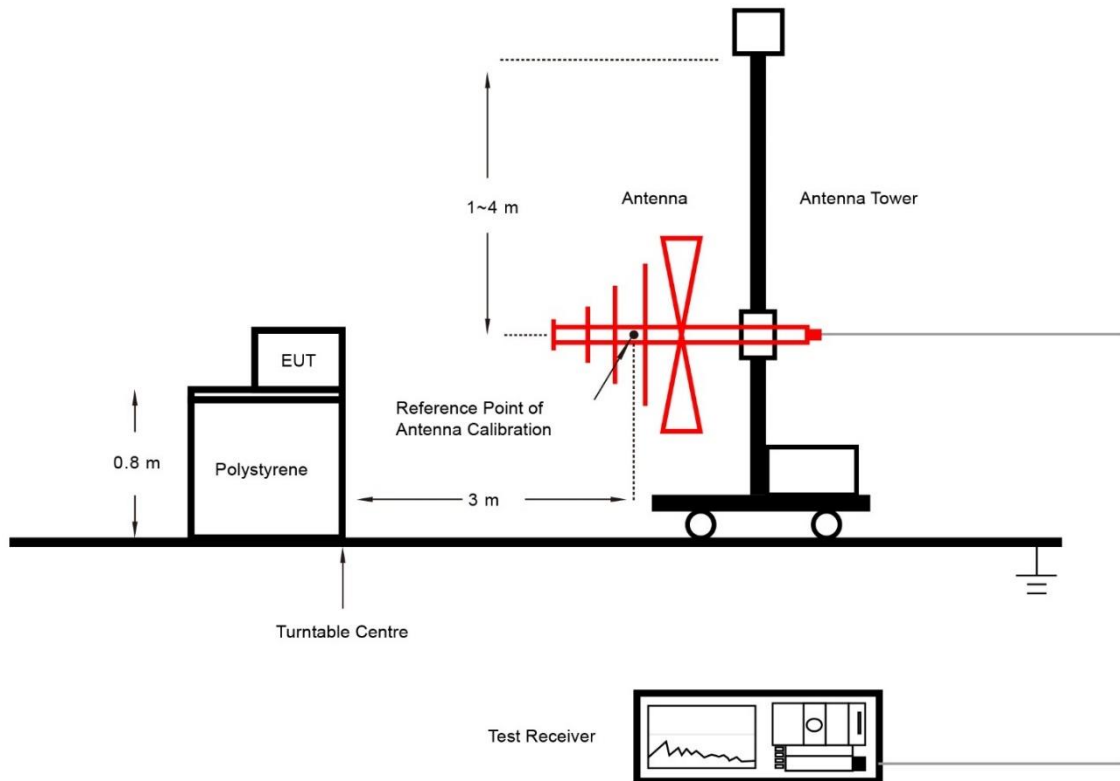

Above 1GHz Test Setup:

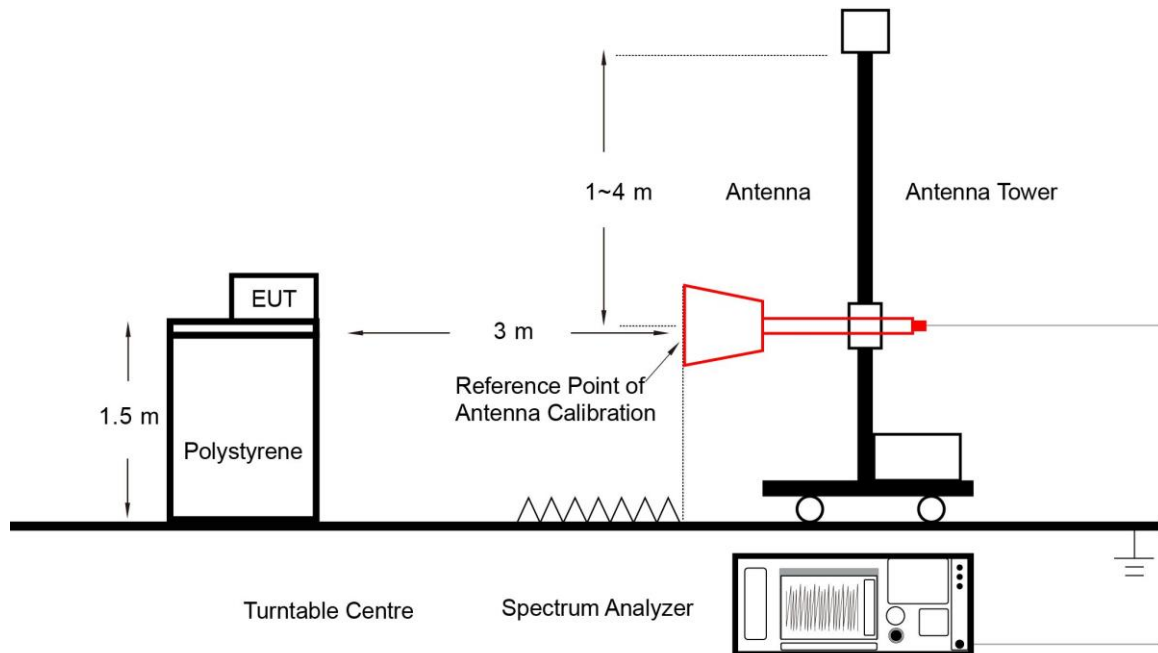

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

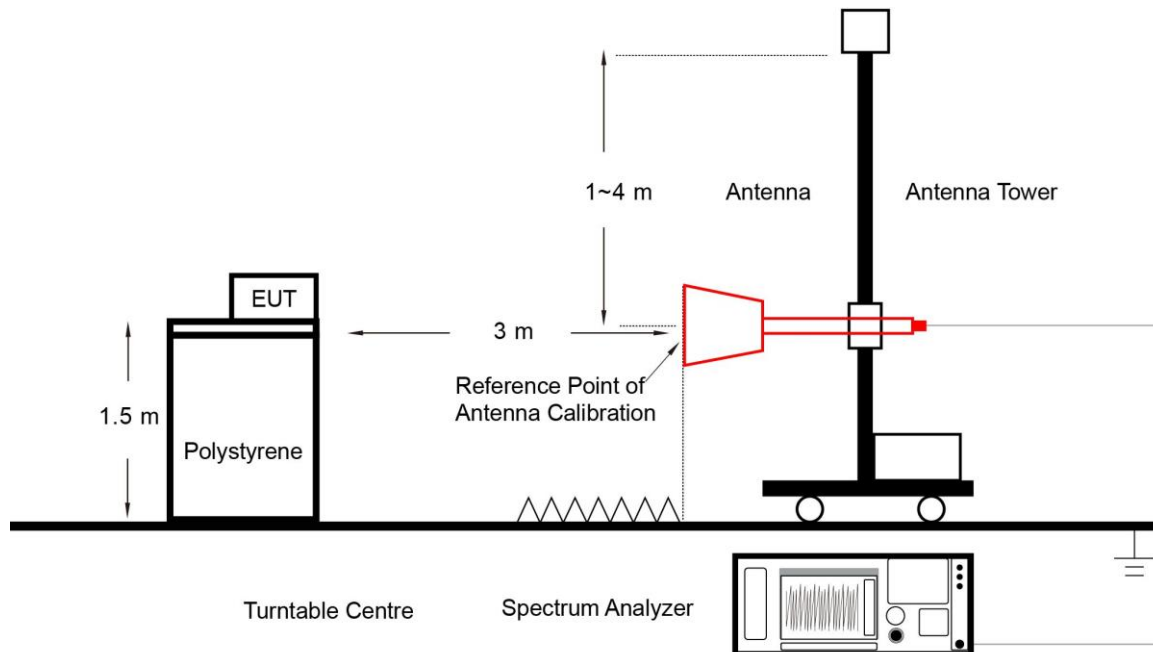

6.9.5. Test Result

Refer to Appendix A.8.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

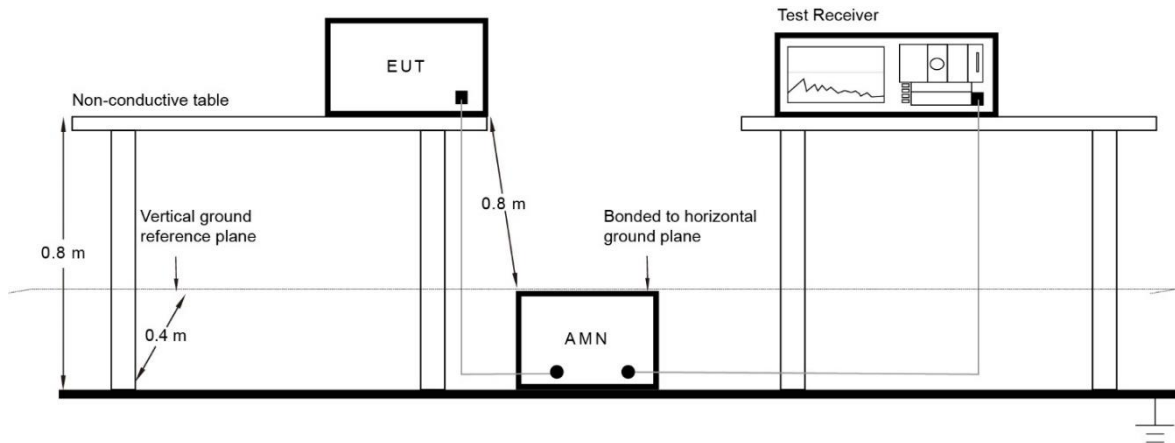

6.10.3. Test Result


Refer to Appendix A.9.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/04/29		

Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11a	90.59%	802.11ax-HE20	87.51%
802.11ac-VHT20	90.00%	802.11ax-HE40	78.50%
802.11ac-VHT40	87.26%	802.11ax-HE80	66.37%
802.11ac-VHT80	68.50%	--	--

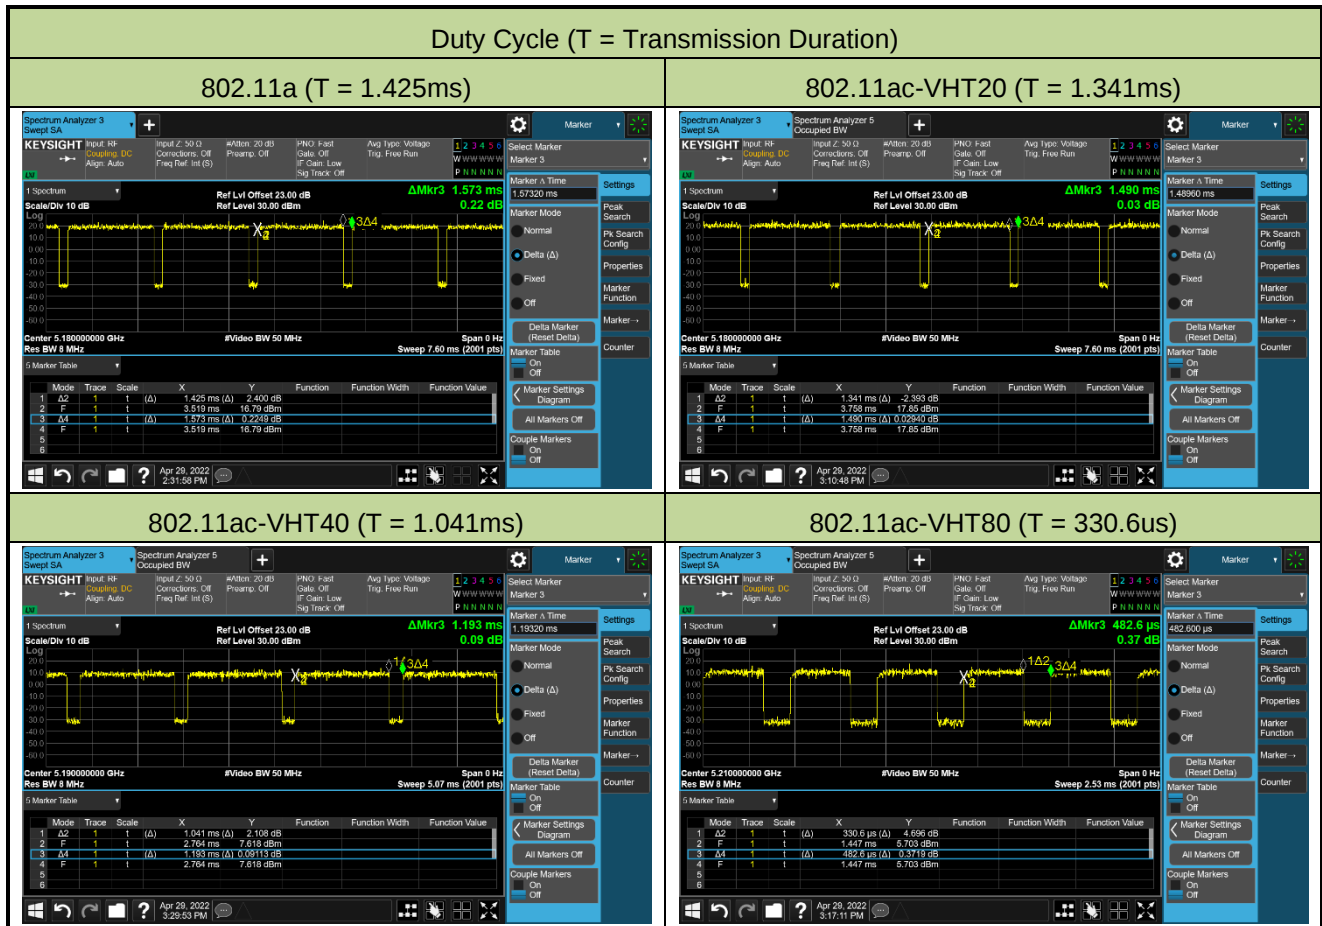


Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 1.044ms)

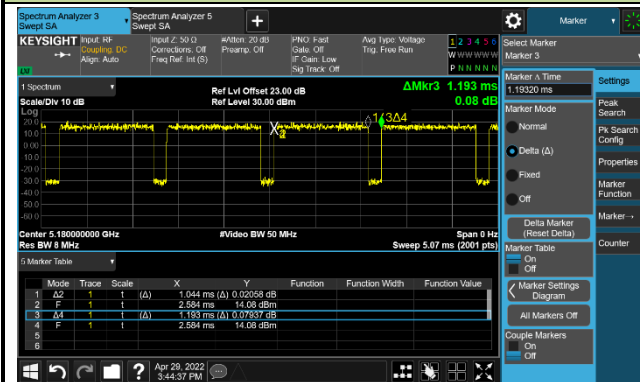

802.11ax-HE40 (T = 548.9us)

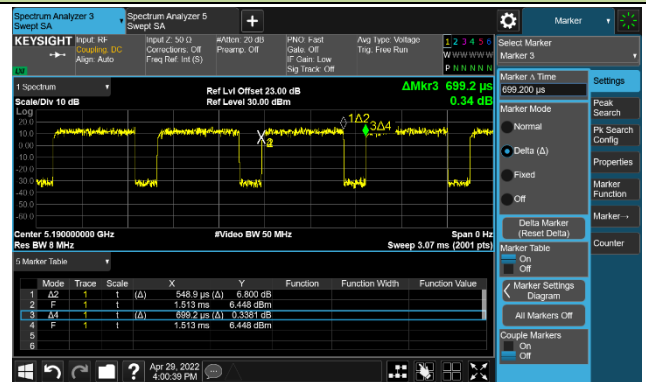

802.11ax-HE80 (T = 296.0us)

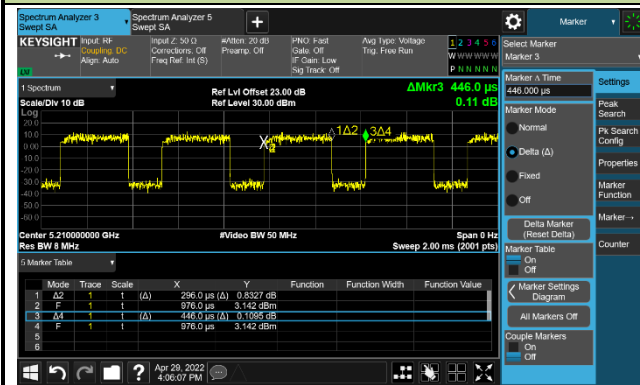


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/06/07		
Test Mode	802.11ax-HE, RU		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11ax-HE20 – 26Tone	82.11%	802.11ax-HE80– 26Tone	82.27%
802.11ax-HE20 – 242Tone	68.29%	802.11ax-HE80– 996Tone	67.03%
802.11ax-HE40– 26Tone	82.27%	--	--
802.11ax-HE40– 484Tone	67.46%	--	--

Duty Cycle (T = Transmission Duration)


802.11ax-HE20 – 26 Tone (T = 692.1µs)

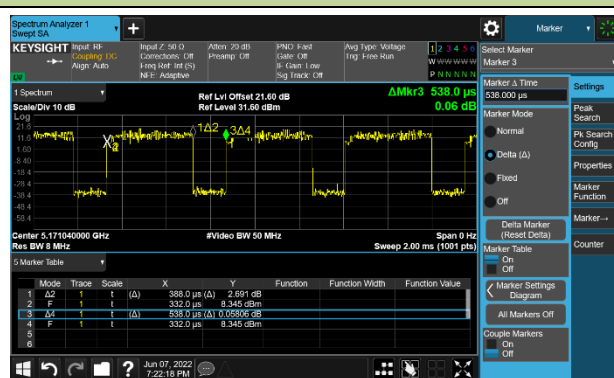


802.11ax-HE20 – 242 Tone (T = 323.0µs)

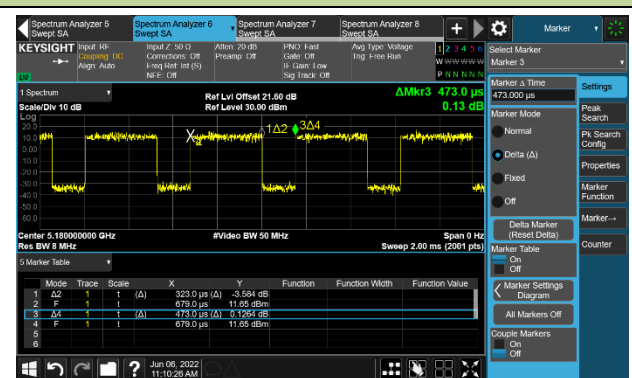


802.11ax-HE40 – 26 Tone (T = 696.0µs)

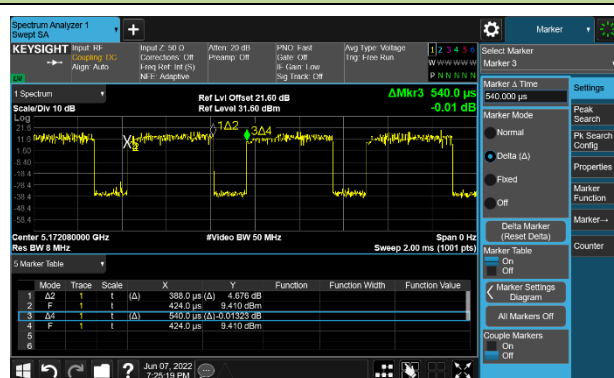


802.11ax-HE40 – 484 Tone (T = 311.0µs)

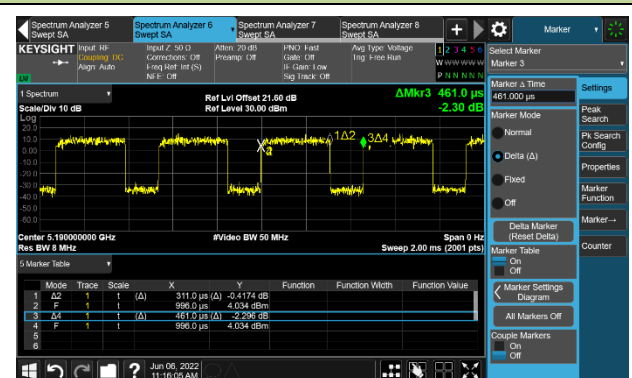

802.11ax-HE80 – 26 Tone (T = 696.0µs)

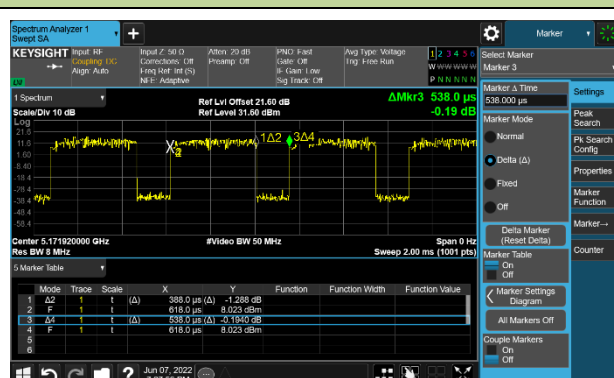

802.11ax-HE80 – 996 Tone (T = 305.0µs)

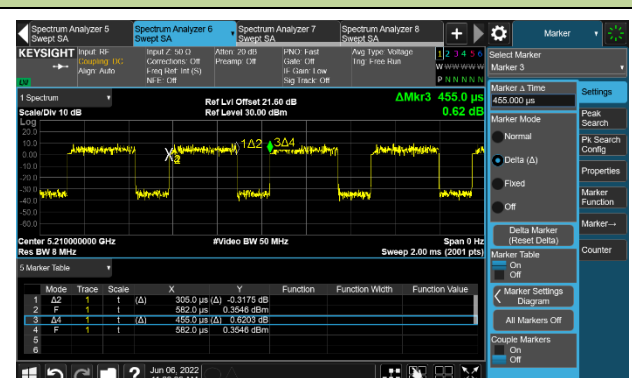

A.2 26dB & 99% Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/05/03~2022/05/05		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	21.15	16.744
11a	6Mbps	44	5220	31.77	17.912
11a	6Mbps	48	5240	31.29	17.530
11a	6Mbps	52	5260	27.27	17.101
11a	6Mbps	60	5300	22.29	16.789
11a	6Mbps	64	5320	27.07	17.238
11a	6Mbps	100	5500	21.17	16.694
11a	6Mbps	116	5580	23.48	16.867
11a	6Mbps	140	5700	23.99	16.887
11a	6Mbps	144	5720	21.21	16.777
11a	6Mbps	149	5745	21.69	16.750
11a	6Mbps	157	5785	21.56	16.699
11a	6Mbps	165	5825	22.87	16.770
11ac-VHT20	MCS0	36	5180	27.32	18.137
11ac-VHT20	MCS0	44	5220	29.34	18.215
11ac-VHT20	MCS0	48	5240	30.92	18.475
11ac-VHT20	MCS0	52	5260	32.39	18.379
11ac-VHT20	MCS0	60	5300	28.65	18.231
11ac-VHT20	MCS0	64	5320	23.33	17.921
11ac-VHT20	MCS0	100	5500	23.31	17.901
11ac-VHT20	MCS0	116	5580	24.51	17.905
11ac-VHT20	MCS0	140	5700	24.58	18.001
11ac-VHT20	MCS0	144	5720	27.22	18.152
11ac-VHT20	MCS0	149	5745	24.44	17.889
11ac-VHT20	MCS0	157	5785	24.62	17.933
11ac-VHT20	MCS0	165	5825	24.52	17.946

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT40	MCS0	38	5190	41.61	36.317
11ac-VHT40	MCS0	46	5230	40.52	36.311
11ac-VHT40	MCS0	54	5270	39.60	36.270
11ac-VHT40	MCS0	62	5310	40.04	36.285
11ac-VHT40	MCS0	102	5510	44.29	36.394
11ac-VHT40	MCS0	110	5550	45.98	36.286
11ac-VHT40	MCS0	134	5670	60.97	36.656
11ac-VHT40	MCS0	142	5710	61.34	36.603
11ac-VHT40	MCS0	151	5755	60.58	36.622
11ac-VHT40	MCS0	159	5795	53.75	36.294
11ac-VHT80	MCS0	42	5210	81.66	75.718
11ac-VHT80	MCS0	58	5290	81.80	75.653
11ac-VHT80	MCS0	106	5530	81.43	75.654
11ac-VHT80	MCS0	122	5610	81.49	75.889
11ac-VHT80	MCS0	138	5690	81.52	75.690
11ac-VHT80	MCS0	155	5775	81.55	75.753
11ax-HE20	MCS0	36	5180	31.18	19.161
11ax-HE20	MCS0	44	5220	21.05	18.887
11ax-HE20	MCS0	48	5240	20.98	18.899
11ax-HE20	MCS0	52	5260	20.97	18.879
11ax-HE20	MCS0	60	5300	21.10	18.867
11ax-HE20	MCS0	64	5320	21.20	18.885
11ax-HE20	MCS0	100	5500	20.87	18.856
11ax-HE20	MCS0	116	5580	21.23	18.900
11ax-HE20	MCS0	140	5700	20.64	18.936
11ax-HE20	MCS0	144	5720	21.18	18.899
11ax-HE20	MCS0	149	5745	21.12	18.860
11ax-HE20	MCS0	157	5785	20.85	18.880
11ax-HE20	MCS0	165	5825	20.92	18.902

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	39.74	37.658
11ax-HE40	MCS0	46	5230	40.26	37.636
11ax-HE40	MCS0	54	5270	40.07	37.576
11ax-HE40	MCS0	62	5310	39.97	37.605
11ax-HE40	MCS0	102	5510	39.68	37.595
11ax-HE40	MCS0	110	5550	39.98	37.549
11ax-HE40	MCS0	134	5670	39.71	37.573
11ax-HE40	MCS0	142	5710	39.94	37.592
11ax-HE40	MCS0	151	5755	40.17	37.542
11ax-HE40	MCS0	159	5795	39.72	37.499
11ax-HE80	MCS0	42	5210	81.19	77.212
11ax-HE80	MCS0	58	5290	81.27	77.164
11ax-HE80	MCS0	106	5530	81.54	77.123
11ax-HE80	MCS0	122	5610	81.46	77.159
11ax-HE80	MCS0	138	5690	81.87	77.255
11ax-HE80	MCS0	155	5775	81.36	77.193


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.77	< 5250
802.11ac-VHT20	MCS0	48	5240	5249.24	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.16	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.86	< 5250
802.11ax-HE20	MCS0	48	5240	5249.45	< 5250
802.11ax-HE40	MCS0	46	5230	5248.82	< 5250
802.11ax-HE80	MCS0	42	5210	5248.61	< 5250

Note: F_H = Centre frequency + 99% OBW / 2


For example, 802.11a 5240MHz, F_H = 5240 MHz + 17.53 MHz / 2 = 5248.77MHz.

802.11a 26dB & 99% Bandwidth – Ant 1


Channel 36 (5180MHz)

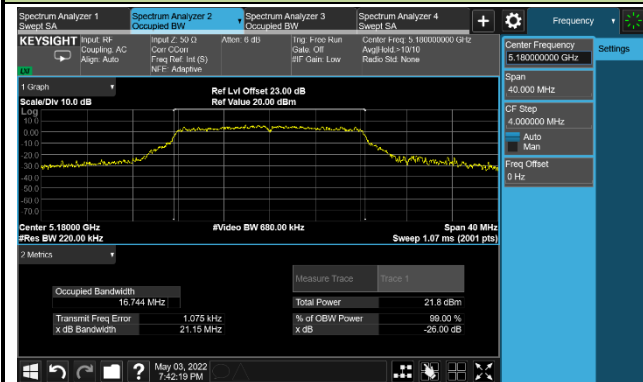


Channel 44 (5220MHz)

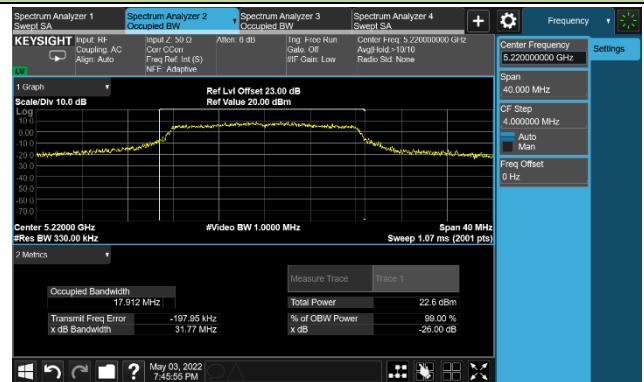


Channel 48 (5240MHz)

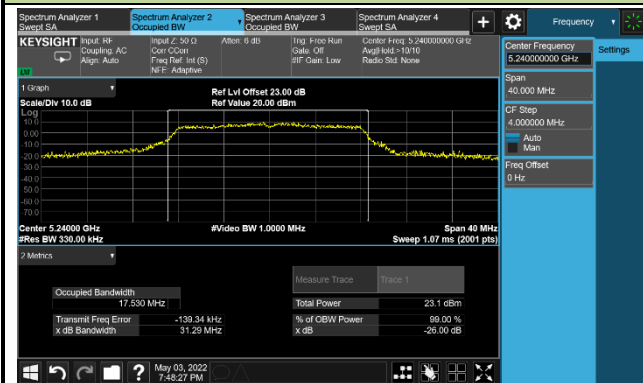


Channel 52 (5260MHz)

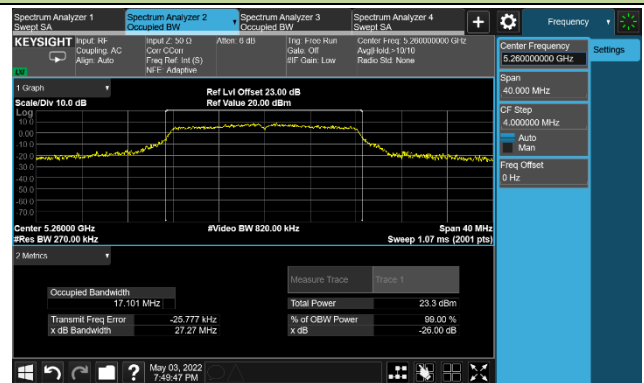


Channel 60 (5300MHz)

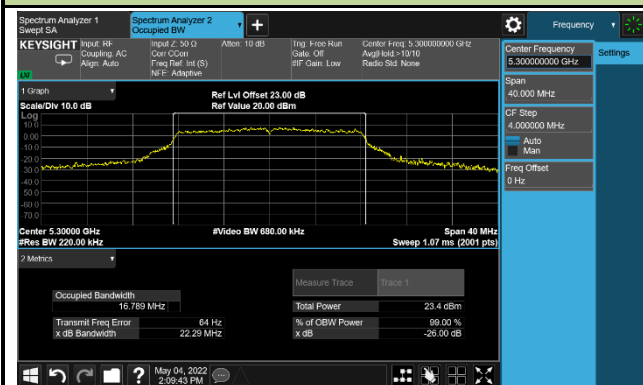


Channel 64 (5320MHz)

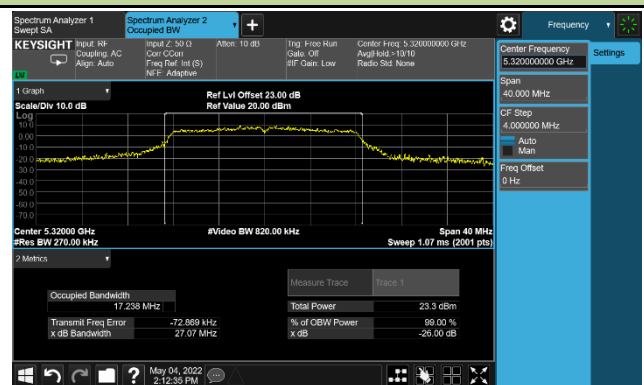


Channel 100 (5500MHz)

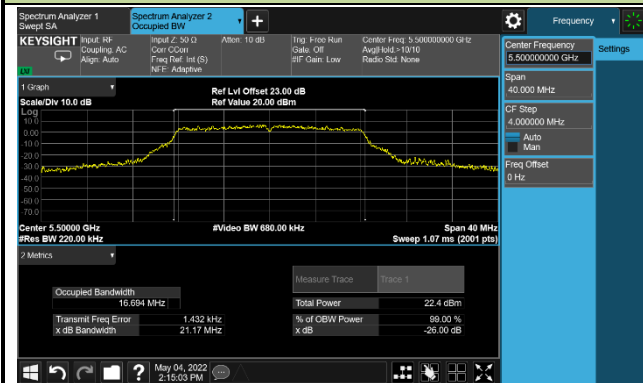


Channel 116 (5580MHz)

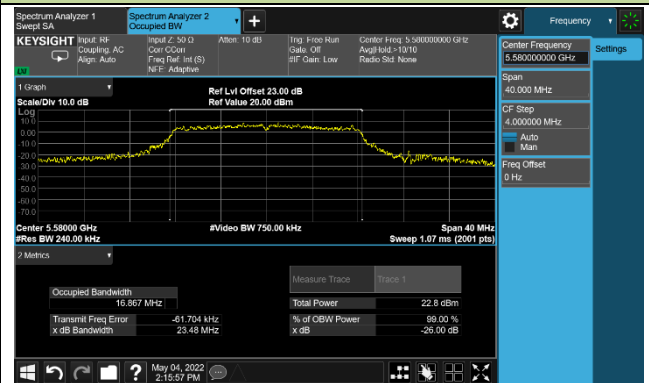


Channel 140 (5700MHz)

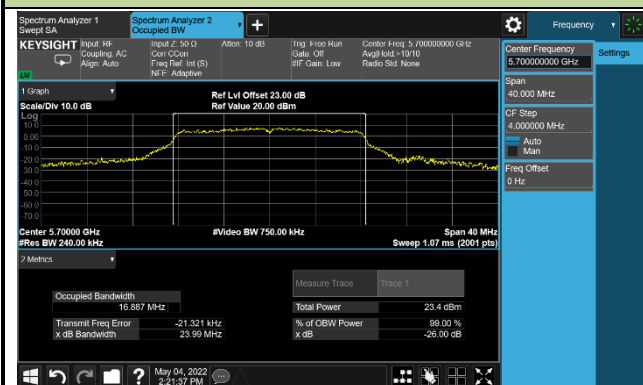


Channel 144(5720MHz)

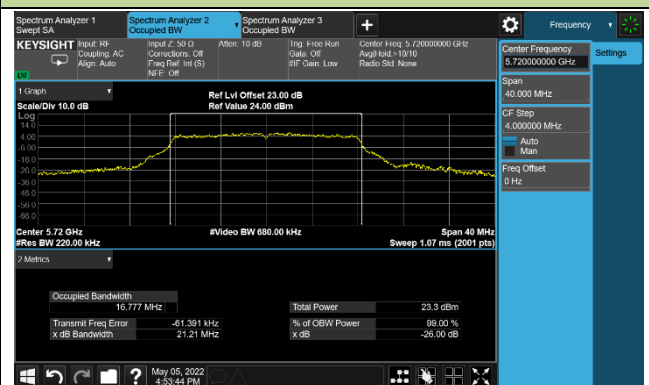


Channel 149 (5745MHz)

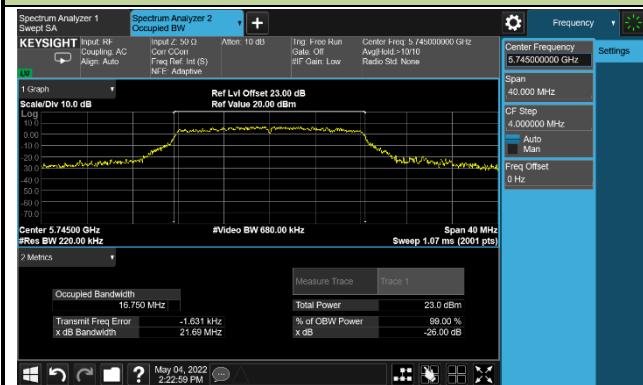

Channel 157(5785MHz)

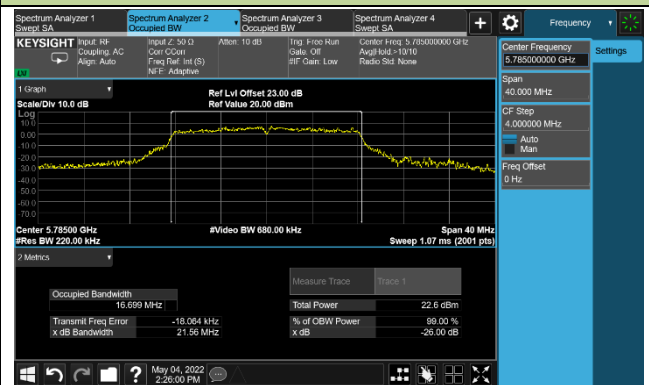


Channel 165 (5825MHz)

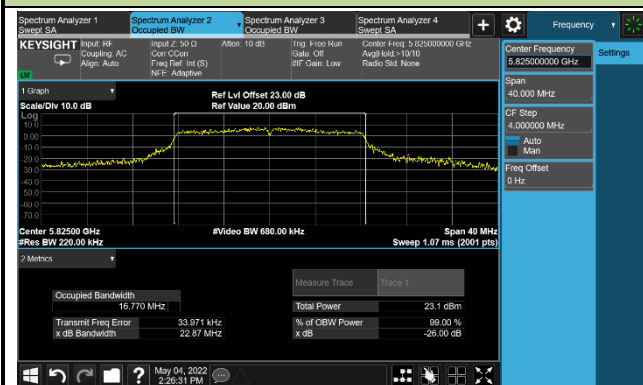


802.11ac-VHT20 26dB & 99% Bandwidth – Ant 1


Channel 36 (5180MHz)

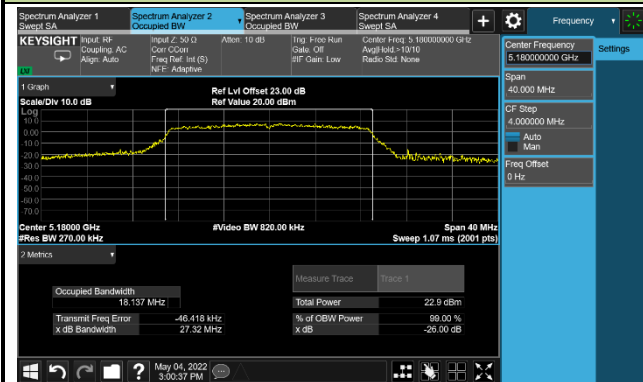


Channel 44 (5220MHz)

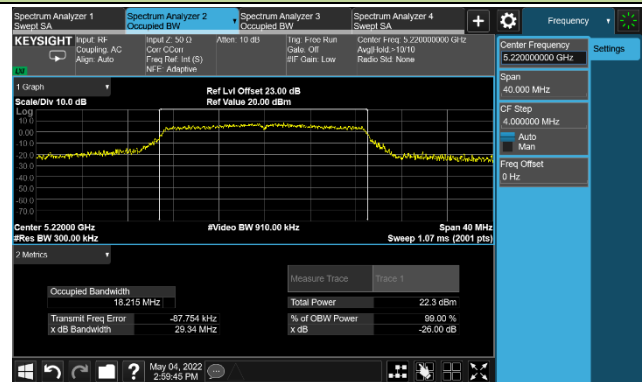


Channel 48 (5240MHz)

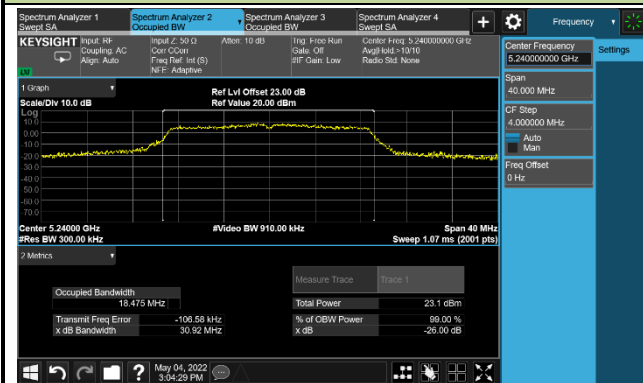


Channel 52 (5260MHz)

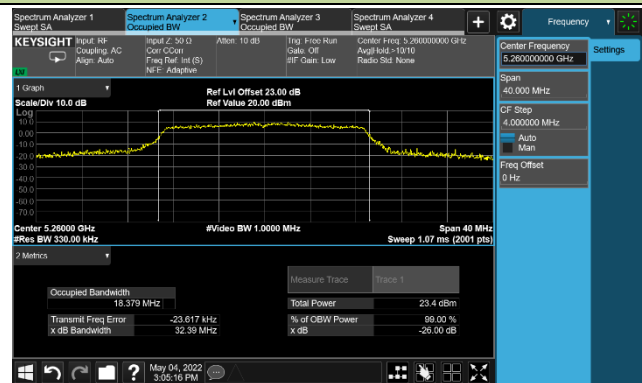

Channel 60 (5300MHz)

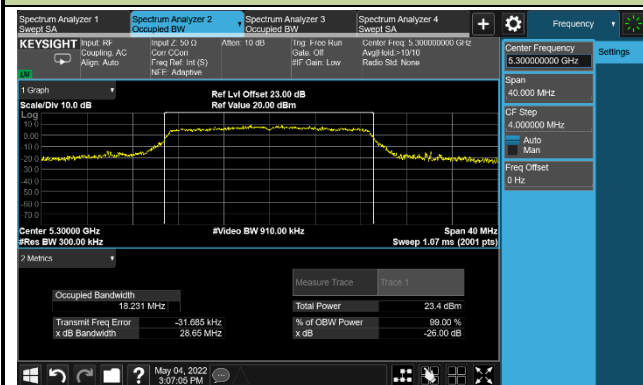


Channel 64 (5320MHz)

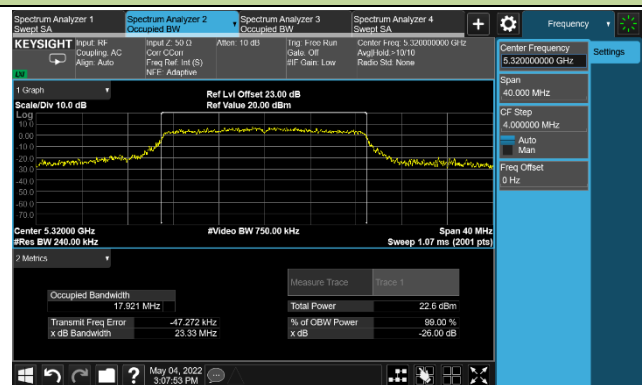


802.11ac-VHT20 26dB & 99% Bandwidth – Ant 1


Channel 100 (5500MHz)

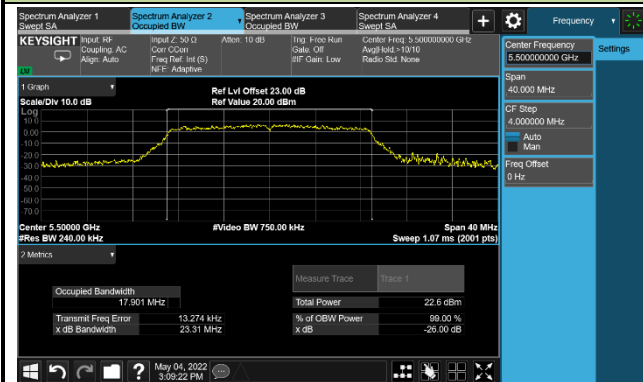


Channel 116 (5580MHz)

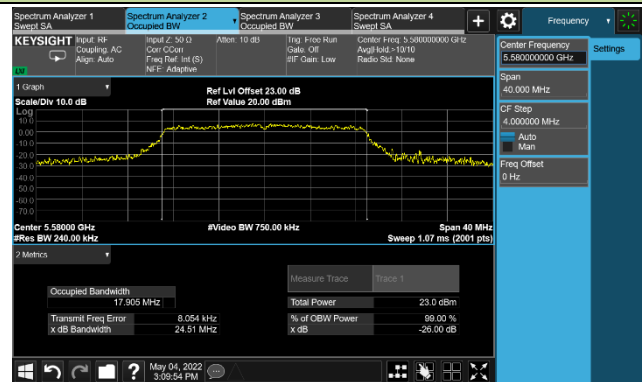


Channel 140 (5700MHz)

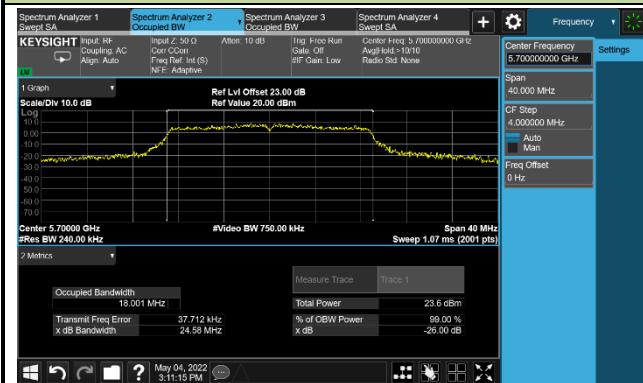


Channel 144(5720MHz)

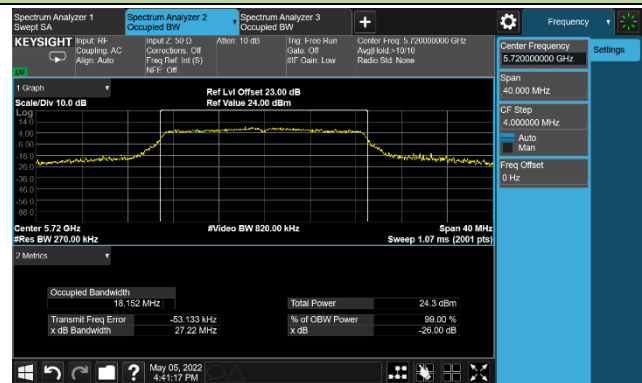


Channel 149 (5745MHz)

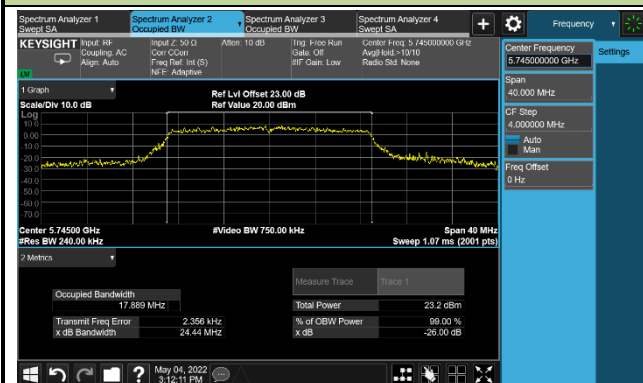

Channel 157(5785MHz)

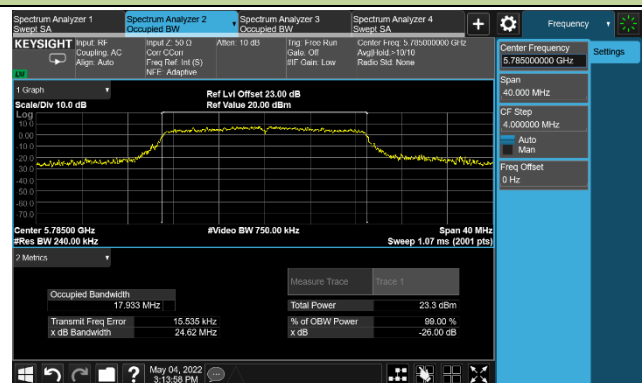


Channel 165 (5825MHz)

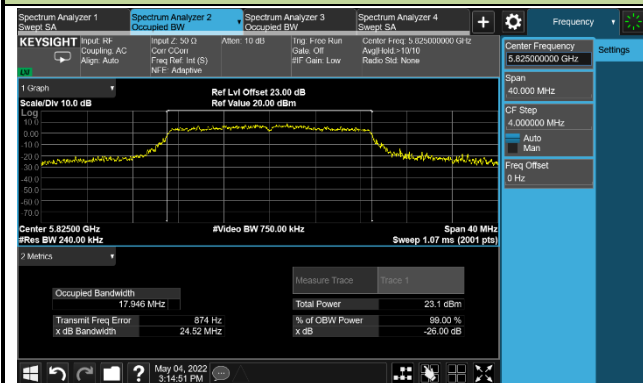


802.11ac-VHT40 26dB & 99% Bandwidth – Ant 1


Channel 38 (5190MHz)

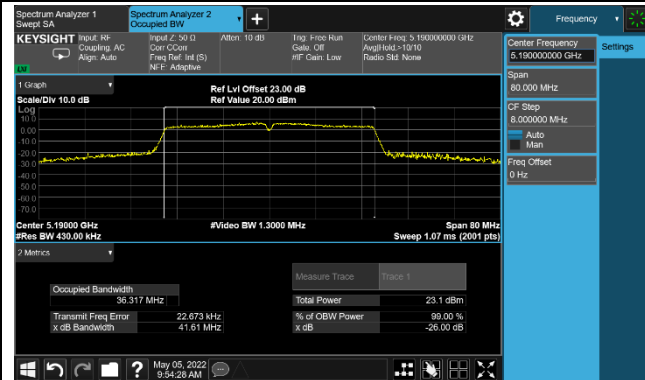


Channel 46 (5230MHz)

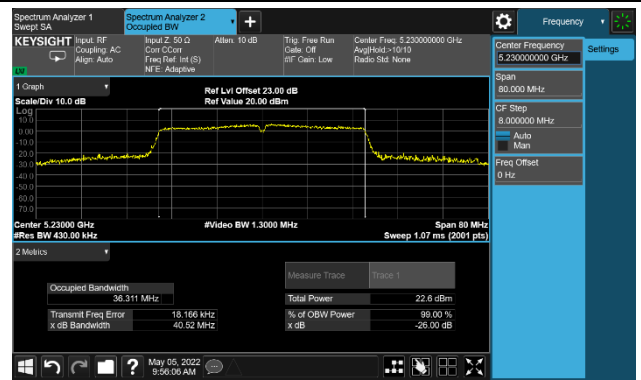


Channel 54 (5270MHz)

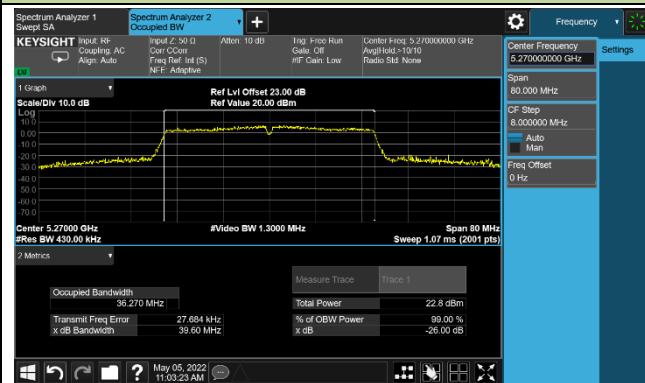


Channel 62 (5310MHz)

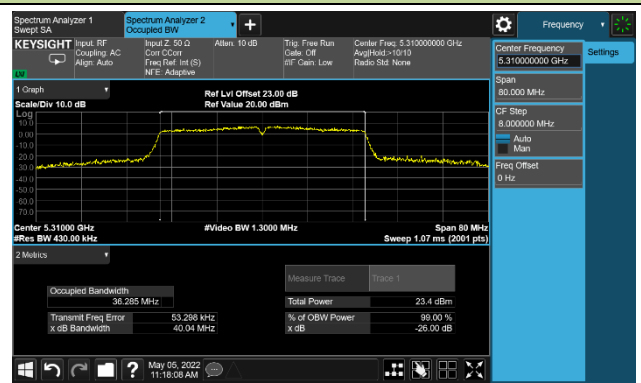

Channel 102 (5510MHz)

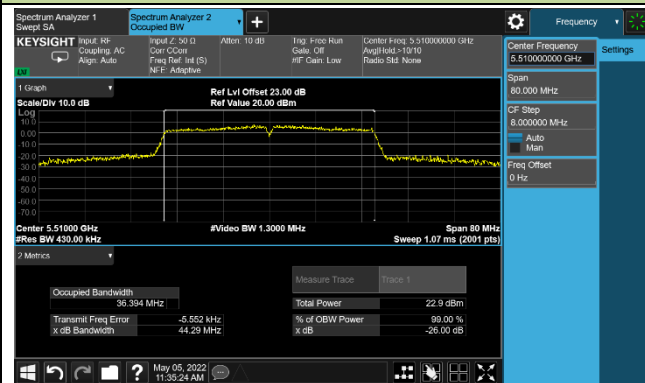


Channel 110 (5550MHz)

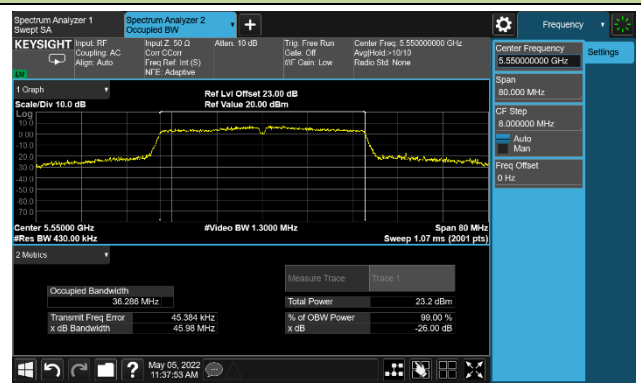


802.11ac-VHT40 26dB & 99% Bandwidth – Ant 1


Channel 134 (5670MHz)

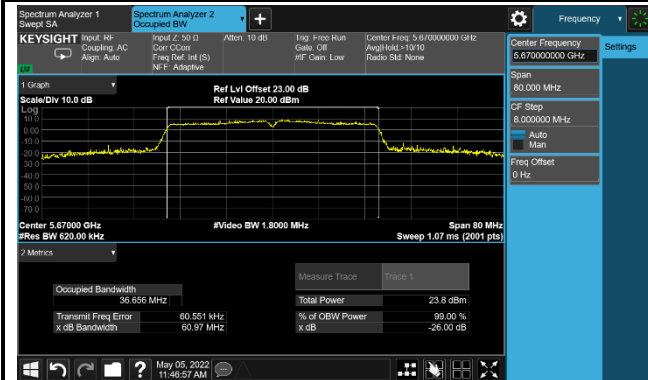


Channel 142(5710MHz)

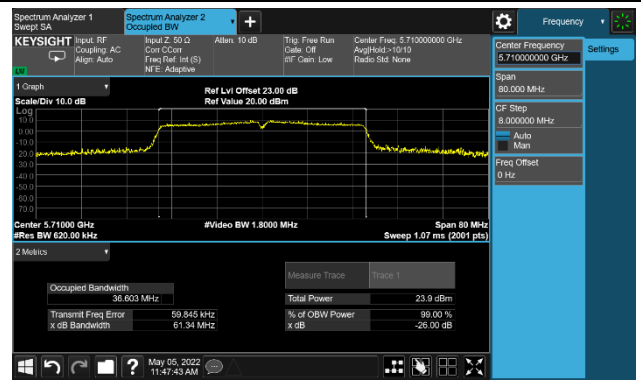

Channel 151 (5755MHz)

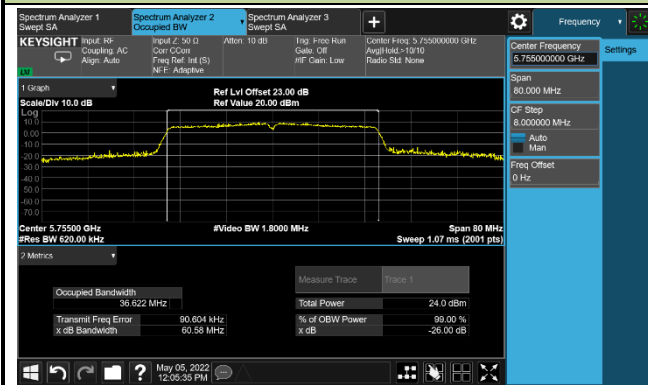


Channel 159(5795MHz)

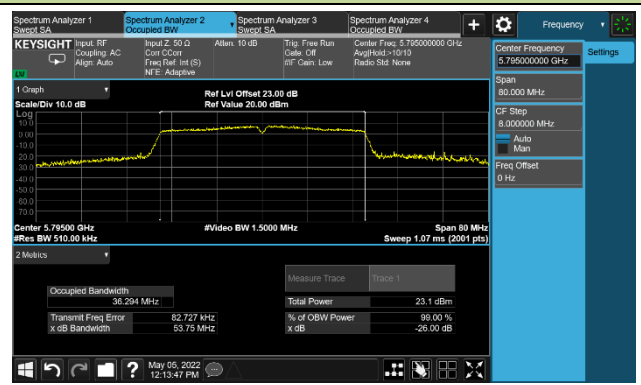


802.11ac-VHT80 26dB & 99% Bandwidth – Ant 1


Channel 42 (5210MHz)

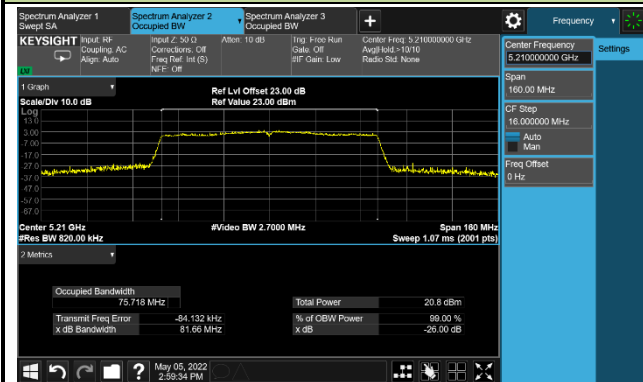


Channel 58 (5290MHz)

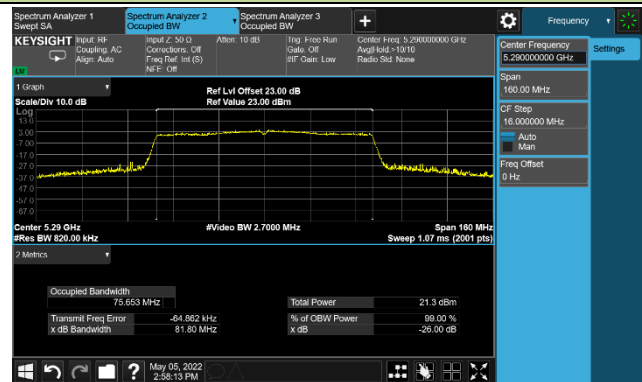


Channel 106 (5530MHz)

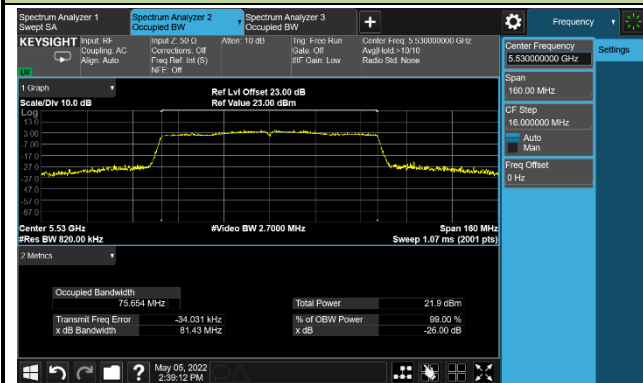


Channel 122 (5610MHz)

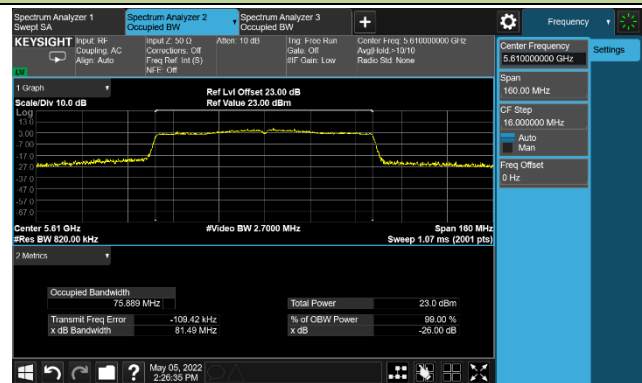

Channel 138 (5690MHz)

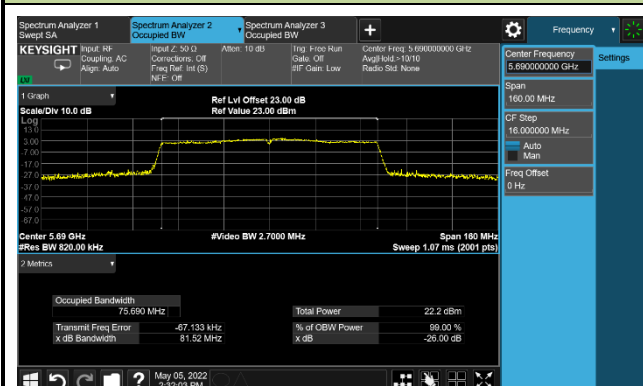


Channel 155 (5775MHz)

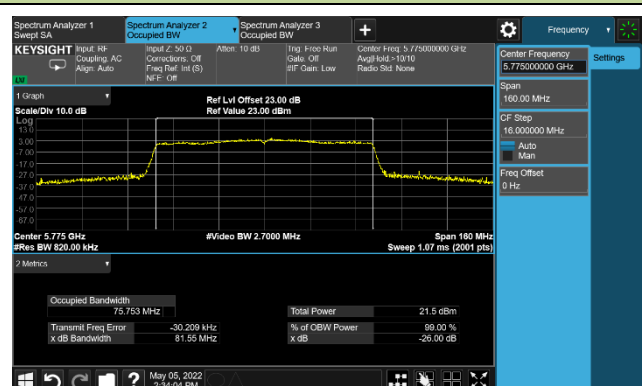


802.11ax-HE20 26dB & 99% Bandwidth – Ant 1


Channel 36 (5180MHz)

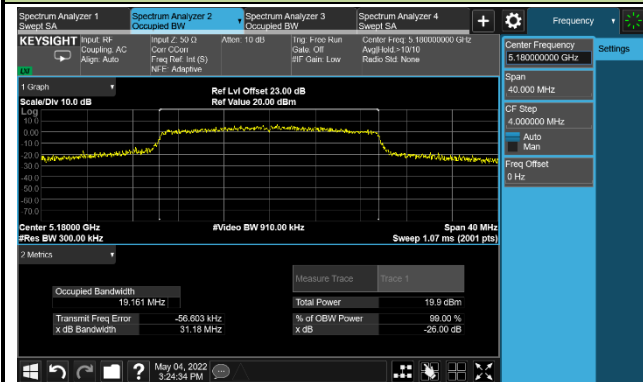


Channel 44 (5220MHz)

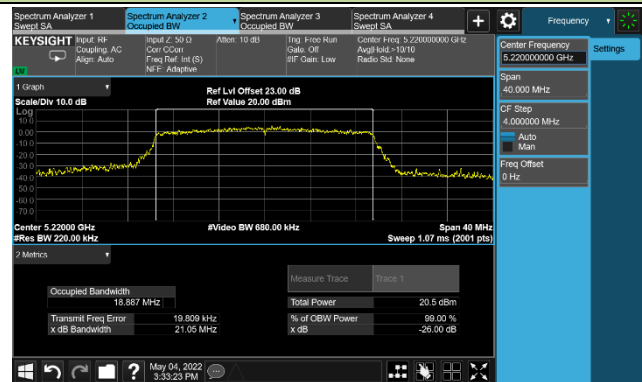


Channel 48 (5240MHz)

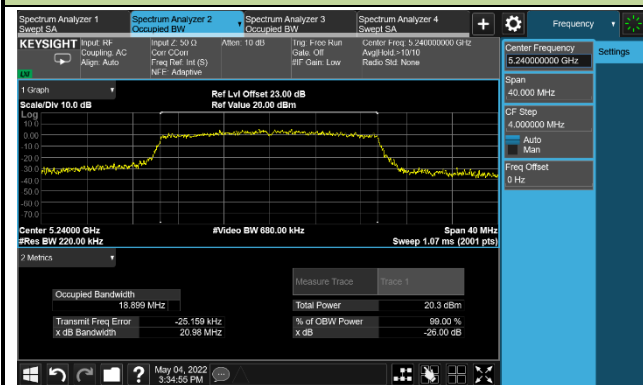


Channel 52 (5260MHz)

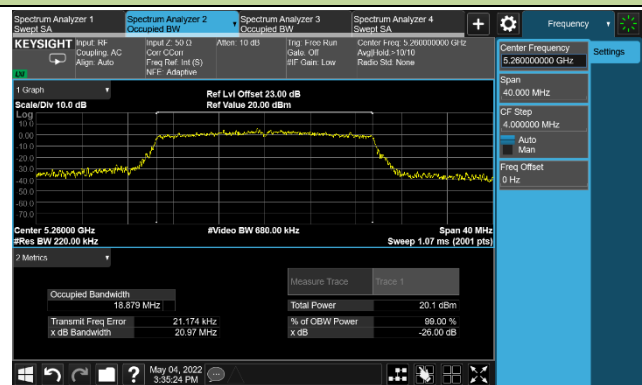

Channel 60 (5300MHz)

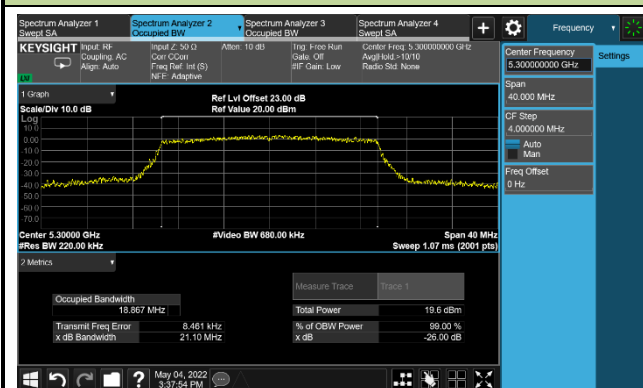


Channel 64 (5320MHz)

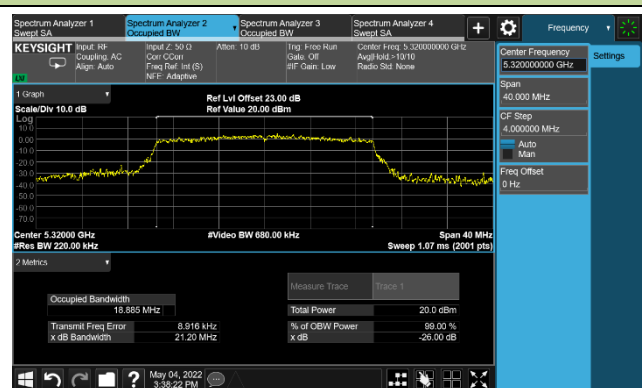


802.11ax-HE20 26dB & 99% Bandwidth – Ant 1


Channel 100 (5500MHz)

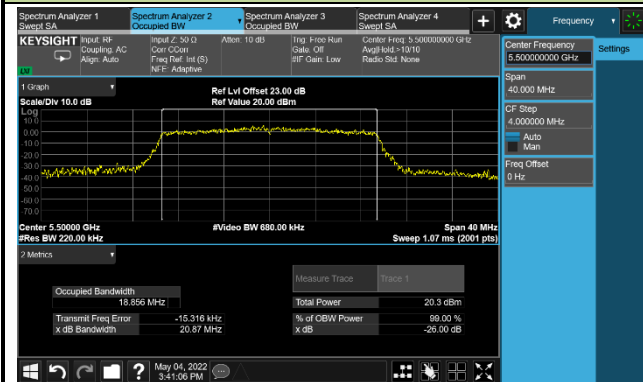


Channel 116 (5580MHz)

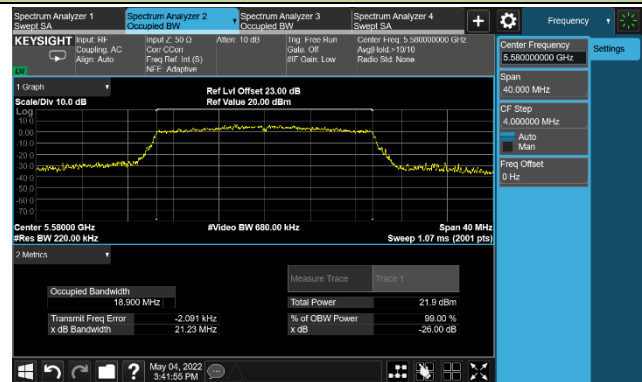


Channel 140 (5700MHz)

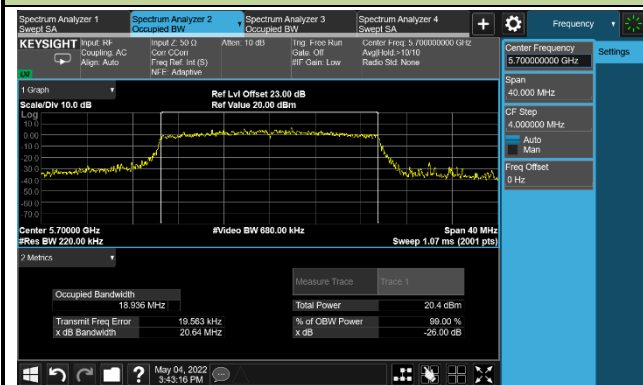


Channel 144(5720MHz)

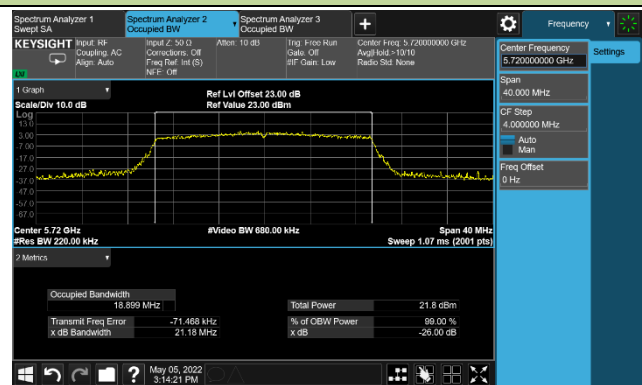

Channel 149 (5745MHz)

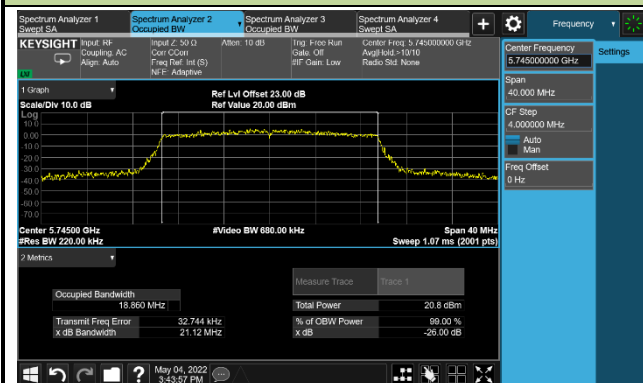

Channel 157(5785MHz)

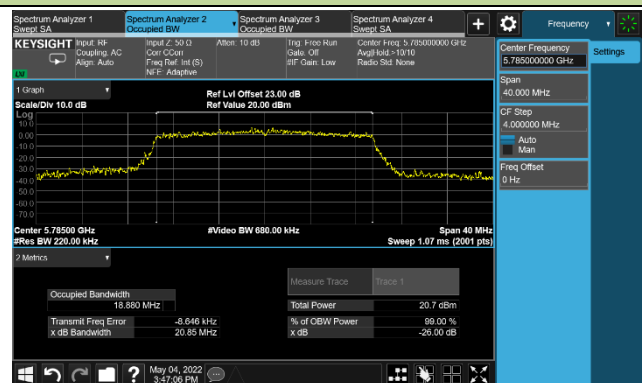

Channel 165 (5825MHz)

