



802.11ax-HE40 Out-of-Band Emissions –MIMO-Ant 2- 26 Tone RU 8

Channel 03 (2422MHz)


Reference Level

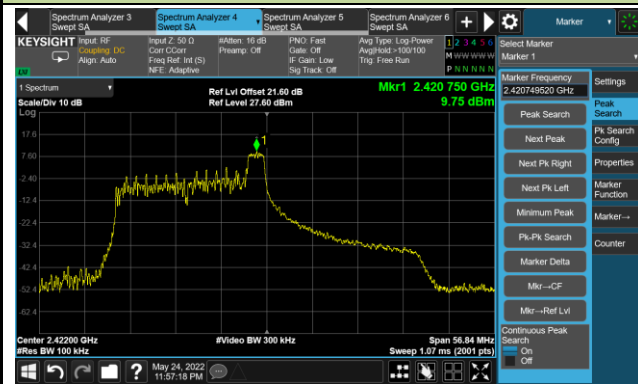

Low Band Edge

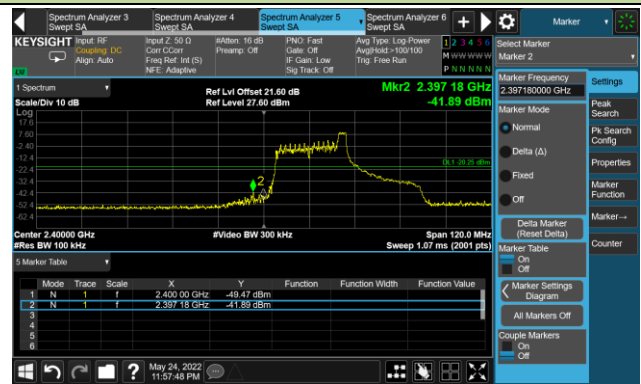


Spurious Emission

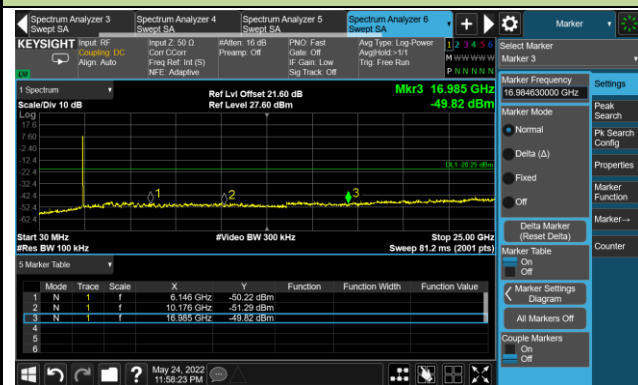


Channel 06 (2437MHz)

Reference Level

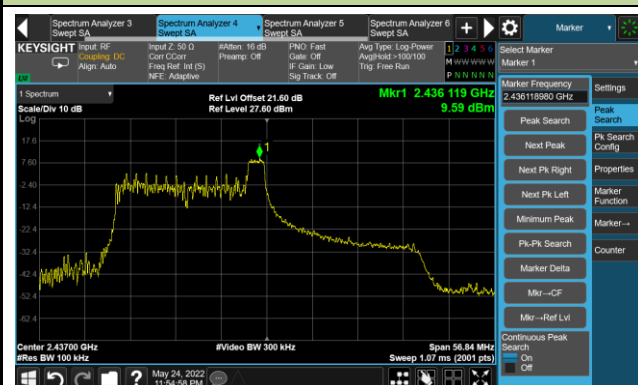


Spurious Emission

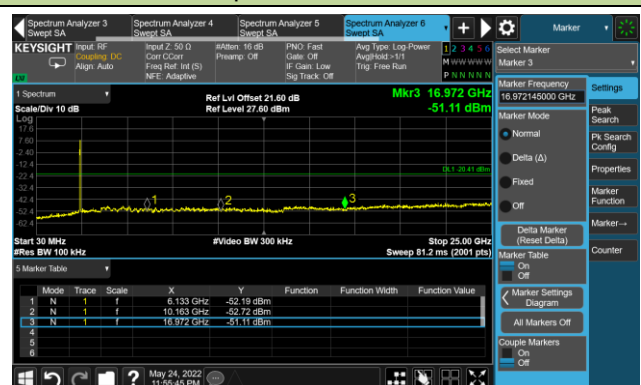


Channel 09 (2452MHz)


Reference Level

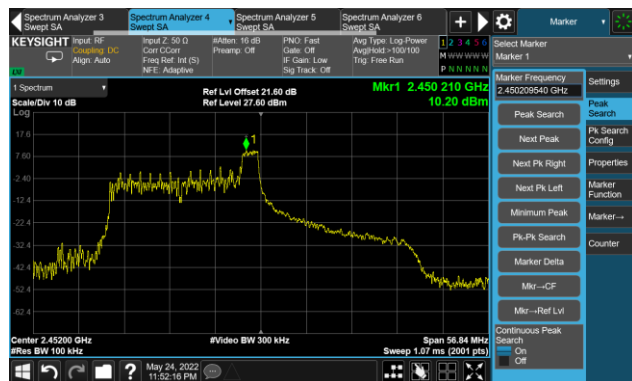

High Band Edge

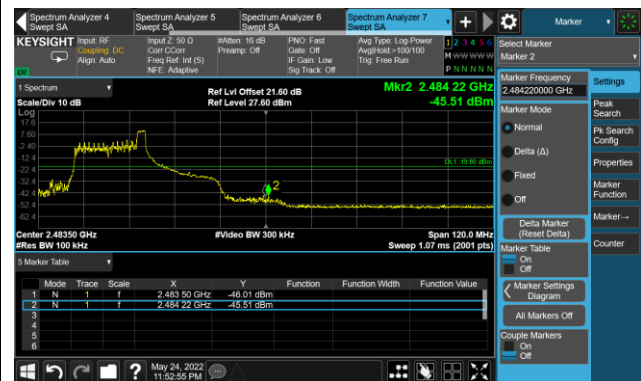

Spurious Emission

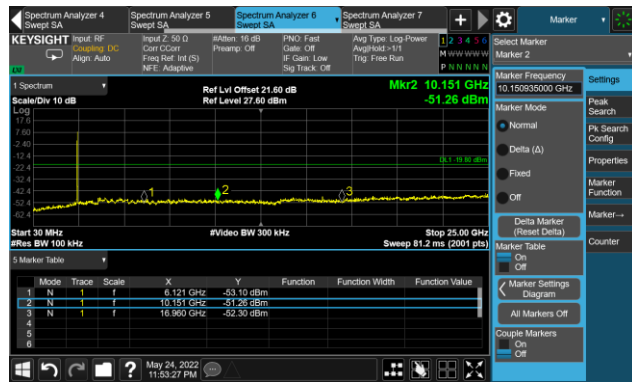


802.11ax-HE40 Out-of-Band Emissions –MIMO-Ant 2- 26 Tone RU 17

Channel 03 (2422MHz)


Reference Level



Low Band Edge

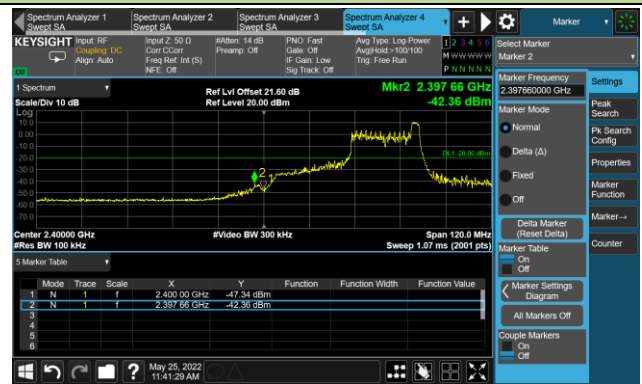


Spurious Emission

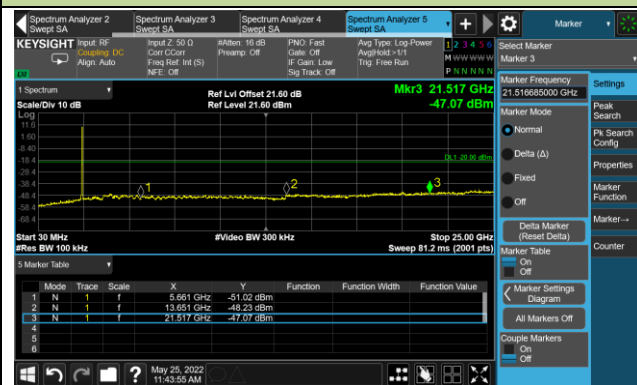


Channel 06 (2437MHz)

Reference Level

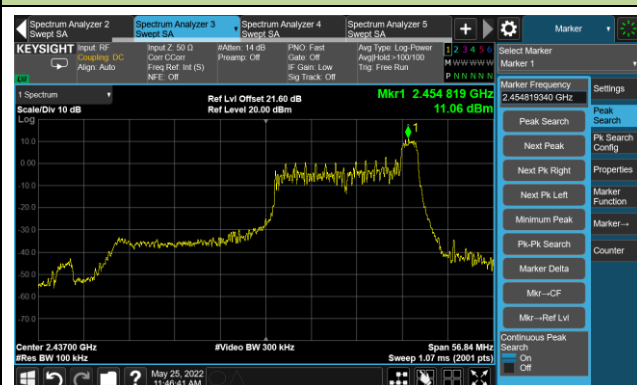


Spurious Emission

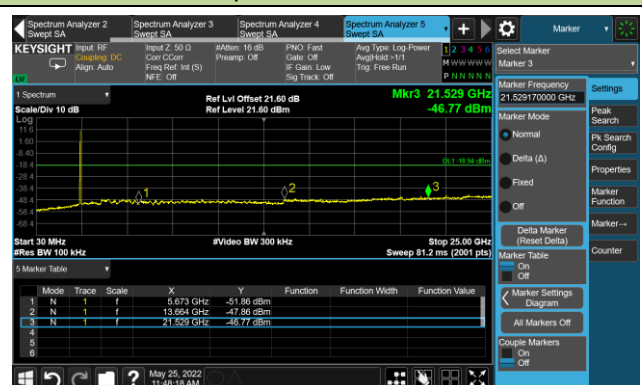

Channel 09 (2452MHz)


Reference Level

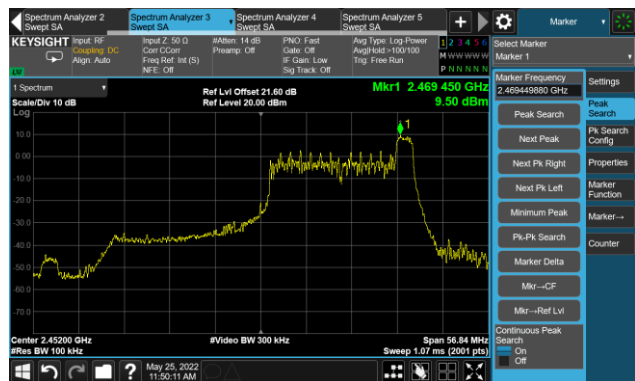

High Band Edge



Spurious Emission

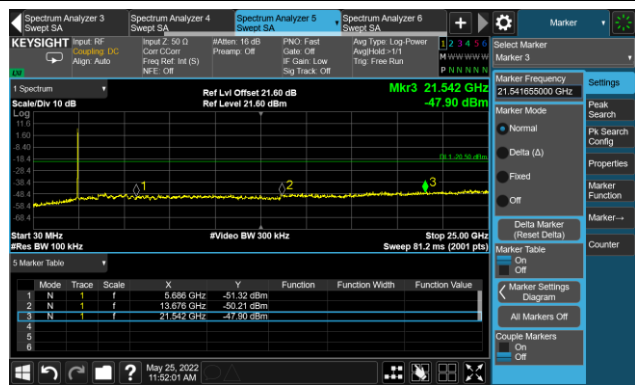


802.11ax-HE40 Out-of-Band Emissions – MIMO -Ant 2- 484 Tone RU 65

Channel 03 (2422MHz)


Reference Level



Low Band Edge

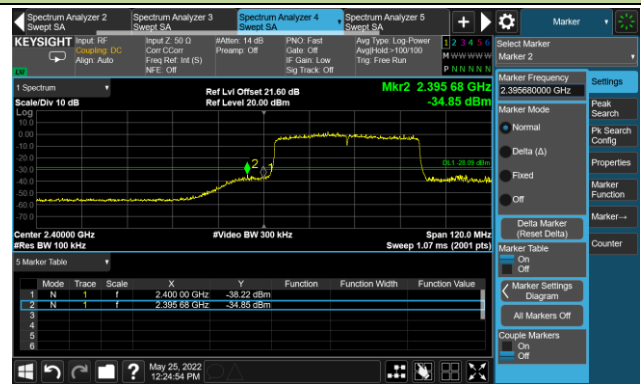


Spurious Emission

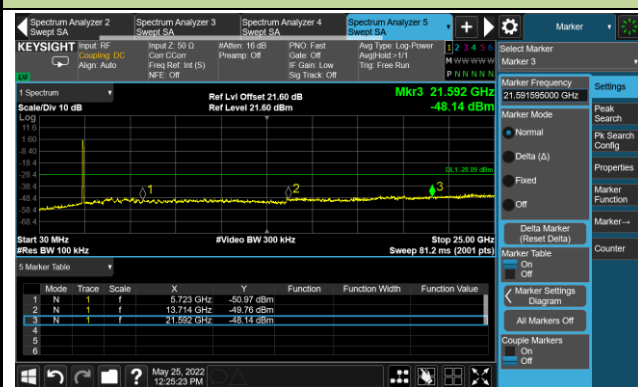


Channel 06 (2437MHz)

Reference Level

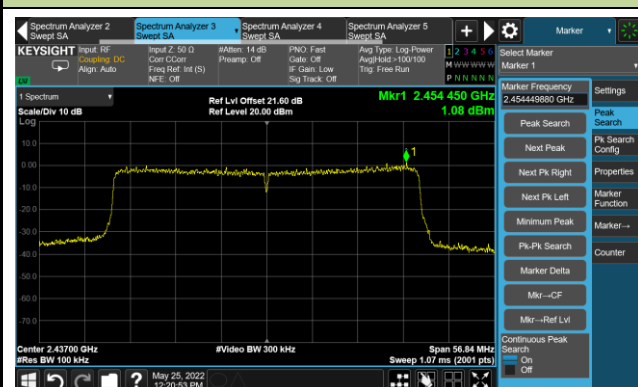


Spurious Emission

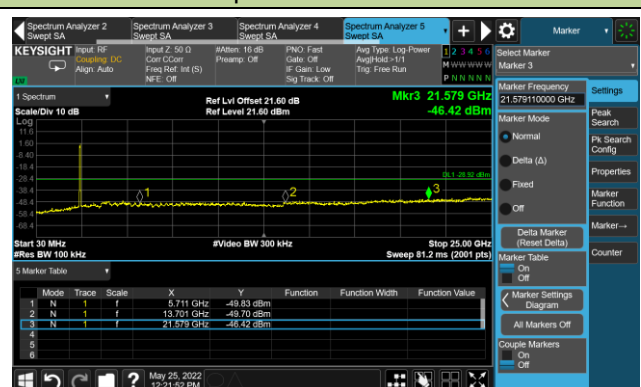


Channel 09 (2452MHz)


Reference Level

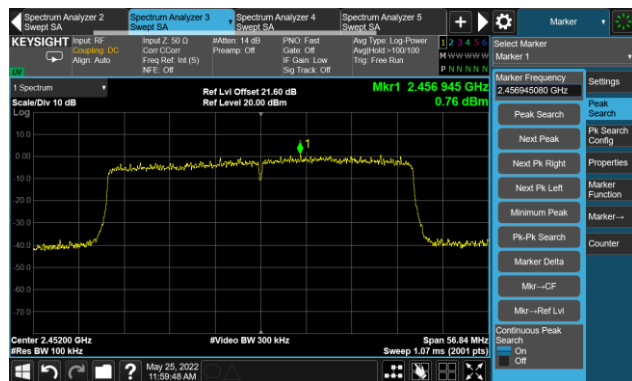

High Band Edge

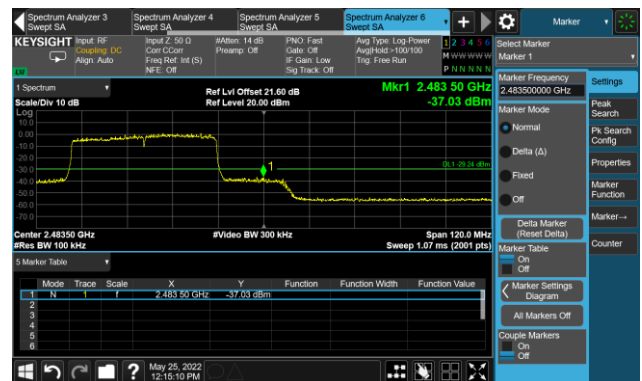

Spurious Emission

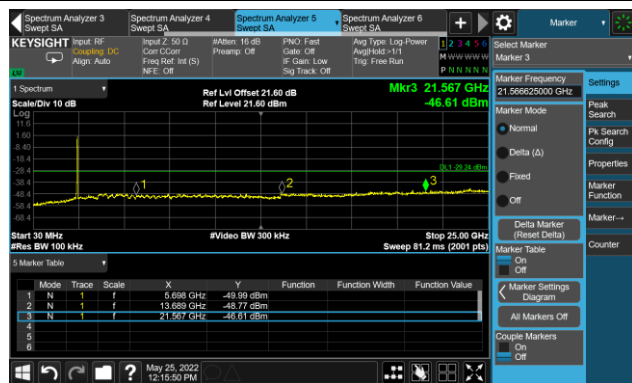

A.6 Radiated Spurious Emission Test Result

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11b – SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4859.0	36.0	1.5	37.5	74.0	-36.5	Peak	Horizontal
	7434.5	34.3	9.5	43.8	74.0	-30.2	Peak	Horizontal
	11531.5	31.3	15.5	46.8	74.0	-27.2	Peak	Horizontal
	4646.5	35.5	1.4	36.9	74.0	-37.1	Peak	Vertical
	7434.5	32.7	9.5	42.2	74.0	-31.8	Peak	Vertical
	11378.5	33.2	14.8	48.0	74.0	-26.0	Peak	Vertical
06	4901.5	37.0	1.2	38.2	74.0	-35.8	Peak	Horizontal
	7400.5	34.0	9.4	43.4	74.0	-30.6	Peak	Horizontal
	10970.5	34.3	14.5	48.8	74.0	-25.2	Peak	Horizontal
	4825.0	36.6	1.4	38.0	74.0	-36.0	Peak	Vertical
	7434.5	35.3	9.5	44.8	74.0	-29.2	Peak	Vertical
	11174.5	33.7	15.4	49.1	74.0	-24.9	Peak	Vertical
11	4859.0	36.1	1.5	37.6	74.0	-36.4	Peak	Horizontal
	7536.5	33.1	9.1	42.2	74.0	-31.8	Peak	Horizontal
	11633.5	32.0	15.9	47.9	74.0	-26.1	Peak	Horizontal
	4816.5	34.2	1.4	35.6	74.0	-38.4	Peak	Vertical
	7366.5	33.8	9.3	43.1	74.0	-30.9	Peak	Vertical
	11327.5	32.7	14.8	47.5	74.0	-26.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11g – SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4170.5	37.6	-0.7	36.9	74.0	-37.1	Peak	Horizontal
	7468.5	32.5	9.3	41.8	74.0	-32.2	Peak	Horizontal
	11531.5	31.7	15.5	47.2	74.0	-26.8	Peak	Horizontal
	4247.0	35.4	-0.4	35.0	74.0	-39.0	Peak	Vertical
	7366.5	34.0	9.3	43.3	74.0	-30.7	Peak	Vertical
	11174.5	33.0	15.4	48.4	74.0	-25.6	Peak	Vertical
06	4842.0	38.7	1.5	40.2	74.0	-33.8	Peak	Horizontal
	8199.5	35.5	9.1	44.6	74.0	-29.4	Peak	Horizontal
	10894.0	36.3	14.9	51.2	74.0	-22.8	Peak	Horizontal
	3992.0	40.7	-1.9	38.8	74.0	-35.2	Peak	Vertical
	7570.5	34.8	8.9	43.7	74.0	-30.3	Peak	Vertical
	10783.5	33.8	14.6	48.4	74.0	-25.6	Peak	Vertical
11	4230.0	34.5	-0.3	34.2	74.0	-39.8	Peak	Horizontal
	7332.5	32.7	9.3	42.0	74.0	-32.0	Peak	Horizontal
	11378.5	32.2	14.8	47.0	74.0	-27.0	Peak	Horizontal
	4060.0	38.5	-1.6	36.9	74.0	-37.1	Peak	Vertical
	7570.5	33.9	8.9	42.8	74.0	-31.2	Peak	Vertical
	11276.5	31.9	15.3	47.2	74.0	-26.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11n-HT20 – SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4043.0	36.3	-1.7	34.6	74.0	-39.4	Peak	Horizontal
	7468.5	32.5	9.3	41.8	74.0	-32.2	Peak	Horizontal
	11174.5	31.9	15.4	47.3	74.0	-26.7	Peak	Horizontal
	4043.0	42.8	-1.7	41.1	74.0	-32.9	Peak	Vertical
	7638.5	32.8	8.8	41.6	74.0	-32.4	Peak	Vertical
	11276.5	31.9	15.3	47.2	74.0	-26.8	Peak	Vertical
06	3881.5	38.6	-1.7	36.9	74.0	-37.1	Peak	Horizontal
	7570.5	34.4	8.9	43.3	74.0	-30.7	Peak	Horizontal
	11480.5	34.0	15.4	49.4	74.0	-24.6	Peak	Horizontal
	3941.0	41.1	-2.0	39.1	74.0	-34.9	Peak	Vertical
	7468.5	34.4	9.3	43.7	74.0	-30.3	Peak	Vertical
	11327.5	33.1	14.8	47.9	74.0	-26.1	Peak	Vertical
11	4026.0	37.3	-2.0	35.3	74.0	-38.7	Peak	Horizontal
	7332.5	33.3	9.3	42.6	74.0	-31.4	Peak	Horizontal
	11327.5	32.5	14.8	47.3	74.0	-26.7	Peak	Horizontal
	4213.0	34.5	-0.8	33.7	74.0	-40.3	Peak	Vertical
	7468.5	33.9	9.3	43.2	74.0	-30.8	Peak	Vertical
	11327.5	32.8	14.8	47.6	74.0	-26.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11n-HT40 – SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4153.5	35.8	-0.9	34.9	74.0	-39.1	Peak	Horizontal
	7468.5	33.1	9.3	42.4	74.0	-31.6	Peak	Horizontal
	11531.5	32.9	15.5	48.4	74.0	-25.6	Peak	Horizontal
	4247.0	35.4	-0.4	35.0	74.0	-39.0	Peak	Vertical
	7502.5	33.2	9.3	42.5	74.0	-31.5	Peak	Vertical
	11378.5	32.9	14.8	47.7	74.0	-26.3	Peak	Vertical
06	4094.0	40.1	-1.5	38.6	74.0	-35.4	Peak	Horizontal
	7502.5	34.5	9.3	43.8	74.0	-30.2	Peak	Horizontal
	11276.5	33.5	15.3	48.8	74.0	-25.2	Peak	Horizontal
	4009.0	40.5	-1.9	38.6	74.0	-35.4	Peak	Vertical
	7434.5	34.0	9.5	43.5	74.0	-30.5	Peak	Vertical
	11225.5	33.2	15.0	48.2	74.0	-25.8	Peak	Vertical
09	3992.0	36.4	-1.9	34.5	74.0	-39.5	Peak	Horizontal
	7570.5	32.5	8.9	41.4	74.0	-32.6	Peak	Horizontal
	10877.0	31.7	14.6	46.3	74.0	-27.7	Peak	Horizontal
	4060.0	36.3	-1.6	34.7	74.0	-39.3	Peak	Vertical
	7434.5	33.0	9.5	42.5	74.0	-31.5	Peak	Vertical
	11276.5	31.2	15.3	46.5	74.0	-27.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11ax-HE20- SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3975.0	38.3	-1.9	36.4	74.0	-37.6	Peak	Horizontal
	7502.5	32.6	9.3	41.9	74.0	-32.1	Peak	Horizontal
	11378.5	31.8	14.8	46.6	74.0	-27.4	Peak	Horizontal
	3881.5	36.3	-1.7	34.6	74.0	-39.4	Peak	Vertical
	7400.5	33.3	9.4	42.7	74.0	-31.3	Peak	Vertical
	10970.5	32.4	14.5	46.9	74.0	-27.1	Peak	Vertical
06	4306.5	37.0	-0.3	36.7	74.0	-37.3	Peak	Horizontal
	7434.5	34.8	9.5	44.3	74.0	-29.7	Peak	Horizontal
	11072.5	33.8	15.1	48.9	74.0	-25.1	Peak	Horizontal
	4136.5	39.0	-1.0	38.0	74.0	-36.0	Peak	Vertical
	7434.5	33.7	9.5	43.2	74.0	-30.8	Peak	Vertical
	11684.5	33.1	15.3	48.4	74.0	-25.6	Peak	Vertical
11	4009.0	37.3	-1.9	35.4	74.0	-38.6	Peak	Horizontal
	7468.5	34.3	9.3	43.6	74.0	-30.4	Peak	Horizontal
	11429.5	33.1	15.1	48.2	74.0	-25.8	Peak	Horizontal
	3992.0	41.1	-1.9	39.2	74.0	-34.8	Peak	Vertical
	7706.5	34.3	8.5	42.8	74.0	-31.2	Peak	Vertical
	11480.5	32.2	15.4	47.6	74.0	-26.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11ax-HE40 – SISO Ant 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4077.0	35.6	-1.6	34.0	74.0	-40.0	Peak	Horizontal
	7740.5	34.5	8.6	43.1	74.0	-30.9	Peak	Horizontal
	11378.5	32.8	14.8	47.6	74.0	-26.4	Peak	Horizontal
	3728.5	36.0	-1.5	34.5	74.0	-39.5	Peak	Vertical
	7502.5	33.3	9.3	42.6	74.0	-31.4	Peak	Vertical
	11897.0	33.3	14.1	47.4	74.0	-26.6	Peak	Vertical
06	3975.0	38.8	-1.9	36.9	74.0	-37.1	Peak	Horizontal
	7468.5	34.4	9.3	43.7	74.0	-30.3	Peak	Horizontal
	12381.5	34.2	14.3	48.5	74.0	-25.5	Peak	Horizontal
	4026.0	38.8	-2.0	36.8	74.0	-37.2	Peak	Vertical
	7536.5	33.6	9.1	42.7	74.0	-31.3	Peak	Vertical
	11378.5	34.9	14.8	49.7	74.0	-24.3	Peak	Vertical
09	4026.0	36.4	-2.0	34.4	74.0	-39.6	Peak	Horizontal
	7434.5	33.6	9.5	43.1	74.0	-30.9	Peak	Horizontal
	11735.5	31.3	14.7	46.0	74.0	-28.0	Peak	Horizontal
	3915.5	36.8	-1.8	35.0	74.0	-39.0	Peak	Vertical
	7332.5	33.1	9.3	42.4	74.0	-31.6	Peak	Vertical
	10928.0	33.5	14.9	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11b – SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4026.0	38.6	-2.0	36.6	74.0	-37.4	Peak	Horizontal
	7468.5	35.5	9.3	44.8	74.0	-29.2	Peak	Horizontal
	11072.5	33.7	15.1	48.8	74.0	-25.2	Peak	Horizontal
	4187.5	38.1	-0.8	37.3	74.0	-36.7	Peak	Vertical
	7332.5	36.5	9.3	45.8	74.0	-28.2	Peak	Vertical
	11735.5	33.7	14.7	48.4	74.0	-25.6	Peak	Vertical
06	4060.0	38.2	-1.6	36.6	74.0	-37.4	Peak	Horizontal
	7366.5	36.4	9.3	45.7	74.0	-28.3	Peak	Horizontal
	11072.5	34.5	15.1	49.6	74.0	-24.4	Peak	Horizontal
	4077.0	37.8	-1.6	36.2	74.0	-37.8	Peak	Vertical
	7468.5	35.1	9.3	44.4	74.0	-29.6	Peak	Vertical
	11429.5	35.2	15.1	50.3	74.0	-23.7	Peak	Vertical
11	4119.5	38.9	-1.2	37.7	74.0	-36.3	Peak	Horizontal
	8386.5	35.4	9.8	45.2	74.0	-28.8	Peak	Horizontal
	11429.5	34.7	15.1	49.8	74.0	-24.2	Peak	Horizontal
	3975.0	39.4	-1.9	37.5	74.0	-36.5	Peak	Vertical
	8386.5	35.6	9.8	45.4	74.0	-28.6	Peak	Vertical
	11429.5	34.3	15.1	49.4	74.0	-24.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11g – SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4043.0	38.9	-1.7	37.2	74.0	-36.8	Peak	Horizontal
	7468.5	35.8	9.3	45.1	74.0	-28.9	Peak	Horizontal
	11948.0	34.9	13.8	48.7	74.0	-25.3	Peak	Horizontal
	4094.0	37.6	-1.5	36.1	74.0	-37.9	Peak	Vertical
	7536.5	34.9	9.1	44.0	74.0	-30.0	Peak	Vertical
	11174.5	34.9	15.4	50.3	74.0	-23.7	Peak	Vertical
06	3975.0	40.6	-1.9	38.7	74.0	-35.3	Peak	Horizontal
	7468.5	35.8	9.3	45.1	74.0	-28.9	Peak	Horizontal
	11531.5	34.5	15.5	50.0	74.0	-24.0	Peak	Horizontal
	4281.0	37.9	-0.5	37.4	74.0	-36.6	Peak	Vertical
	8165.5	36.9	9.2	46.1	74.0	-27.9	Peak	Vertical
	11786.5	34.0	14.3	48.3	74.0	-25.7	Peak	Vertical
11	3915.5	38.9	-1.8	37.1	74.0	-36.9	Peak	Horizontal
	7434.5	35.5	9.5	45.0	74.0	-29.0	Peak	Horizontal
	11327.5	33.1	14.8	47.9	74.0	-26.1	Peak	Horizontal
	4094.0	38.4	-1.5	36.9	74.0	-37.1	Peak	Vertical
	8310.0	36.3	9.7	46.0	74.0	-28.0	Peak	Vertical
	11531.5	33.3	15.5	48.8	74.0	-25.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11n-HT20 – SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4060.0	38.7	-1.6	37.1	74.0	-36.9	Peak	Horizontal
	8352.5	35.6	9.8	45.4	74.0	-28.6	Peak	Horizontal
	11633.5	33.1	15.9	49.0	74.0	-25.0	Peak	Horizontal
	4094.0	37.7	-1.5	36.2	74.0	-37.8	Peak	Vertical
	7468.5	34.5	9.3	43.8	74.0	-30.2	Peak	Vertical
	11429.5	34.3	15.1	49.4	74.0	-24.6	Peak	Vertical
06	4026.0	38.4	-2.0	36.4	74.0	-37.6	Peak	Horizontal
	7536.5	34.7	9.1	43.8	74.0	-30.2	Peak	Horizontal
	11276.5	33.6	15.3	48.9	74.0	-25.1	Peak	Horizontal
	3728.5	37.9	-1.5	36.4	74.0	-37.6	Peak	Vertical
	7570.5	34.2	8.9	43.1	74.0	-30.9	Peak	Vertical
	11531.5	34.3	15.5	49.8	74.0	-24.2	Peak	Vertical
11	3949.5	39.0	-1.9	37.1	74.0	-36.9	Peak	Horizontal
	7570.5	34.6	8.9	43.5	74.0	-30.5	Peak	Horizontal
	11327.5	34.4	14.8	49.2	74.0	-24.8	Peak	Horizontal
	4043.0	38.9	-1.7	37.2	74.0	-36.8	Peak	Vertical
	7604.5	35.5	9.1	44.6	74.0	-29.4	Peak	Vertical
	11531.5	33.0	15.5	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11n-HT40 – SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4060.0	37.9	-1.6	36.3	74.0	-37.7	Peak	Horizontal
	7604.5	35.0	9.1	44.1	74.0	-29.9	Peak	Horizontal
	11480.5	33.7	15.4	49.1	74.0	-24.9	Peak	Horizontal
	3898.5	39.0	-1.8	37.2	74.0	-36.8	Peak	Vertical
	7604.5	34.6	9.1	43.7	74.0	-30.3	Peak	Vertical
	11582.5	32.3	15.4	47.7	74.0	-26.3	Peak	Vertical
06	3992.0	38.6	-1.9	36.7	74.0	-37.3	Peak	Horizontal
	7400.5	35.0	9.4	44.4	74.0	-29.6	Peak	Horizontal
	11633.5	32.6	15.9	48.5	74.0	-25.5	Peak	Horizontal
	3915.5	39.0	-1.8	37.2	74.0	-36.8	Peak	Vertical
	8242.0	35.7	9.3	45.0	74.0	-29.0	Peak	Vertical
	11276.5	33.1	15.3	48.4	74.0	-25.6	Peak	Vertical
09	4621.0	39.2	1.5	40.7	74.0	-33.3	Peak	Horizontal
	7434.5	35.1	9.5	44.6	74.0	-29.4	Peak	Horizontal
	11684.5	33.2	15.3	48.5	74.0	-25.5	Peak	Horizontal
	3992.0	39.3	-1.9	37.4	74.0	-36.6	Peak	Vertical
	7400.5	35.2	9.4	44.6	74.0	-29.4	Peak	Vertical
	11633.5	33.3	15.9	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11ax-HE20- SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3932.5	39.2	-1.9	37.3	74.0	-36.7	Peak	Horizontal
	7434.5	34.5	9.5	44.0	74.0	-30.0	Peak	Horizontal
	11123.5	35.1	15.4	50.5	74.0	-23.5	Peak	Horizontal
	3975.0	40.7	-1.9	38.8	74.0	-35.2	Peak	Vertical
	7638.5	35.1	8.8	43.9	74.0	-30.1	Peak	Vertical
	11174.5	34.0	15.4	49.4	74.0	-24.6	Peak	Vertical
06	4264.0	37.3	-0.5	36.8	74.0	-37.2	Peak	Horizontal
	7502.5	34.4	9.3	43.7	74.0	-30.3	Peak	Horizontal
	11684.5	33.3	15.3	48.6	74.0	-25.4	Peak	Horizontal
	4060.0	38.6	-1.6	37.0	74.0	-37.0	Peak	Vertical
	7604.5	34.5	9.1	43.6	74.0	-30.4	Peak	Vertical
	11378.5	34.3	14.8	49.1	74.0	-24.9	Peak	Vertical
11	3864.5	38.5	-1.8	36.7	74.0	-37.3	Peak	Horizontal
	7638.5	35.5	8.8	44.3	74.0	-29.7	Peak	Horizontal
	11582.5	32.5	15.4	47.9	74.0	-26.1	Peak	Horizontal
	3941.0	40.6	-2.0	38.6	74.0	-35.4	Peak	Vertical
	7570.5	34.0	8.9	42.9	74.0	-31.1	Peak	Vertical
	12058.5	35.1	15.0	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022/04/26	Test Mode:	802.11ax-HE40 – SISO Ant 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4009.0	38.8	-1.9	36.9	74.0	-37.1	Peak	Horizontal
	7638.5	36.1	8.8	44.9	74.0	-29.1	Peak	Horizontal
	11786.5	33.8	14.3	48.1	74.0	-25.9	Peak	Horizontal
	4009.0	38.9	-1.9	37.0	74.0	-37.0	Peak	Vertical
	7570.5	33.9	8.9	42.8	74.0	-31.2	Peak	Vertical
	11072.5	34.7	15.1	49.8	74.0	-24.2	Peak	Vertical
06	4136.5	37.1	-1.0	36.1	74.0	-37.9	Peak	Horizontal
	7366.5	34.1	9.3	43.4	74.0	-30.6	Peak	Horizontal
	11531.5	33.8	15.5	49.3	74.0	-24.7	Peak	Horizontal
	3992.0	39.0	-1.9	37.1	74.0	-36.9	Peak	Vertical
	7400.5	35.3	9.4	44.7	74.0	-29.3	Peak	Vertical
	11582.5	32.0	15.4	47.4	74.0	-26.6	Peak	Vertical
09	3847.5	38.0	-1.6	36.4	74.0	-37.6	Peak	Horizontal
	7434.5	34.5	9.5	44.0	74.0	-30.0	Peak	Horizontal
	11327.5	33.8	14.8	48.6	74.0	-25.4	Peak	Horizontal
	4009.0	39.3	-1.9	37.4	74.0	-36.6	Peak	Vertical
	7468.5	35.5	9.3	44.8	74.0	-29.2	Peak	Vertical
	11276.5	33.8	15.3	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11b – MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4638.0	40.9	1.2	42.1	74.0	-31.9	Peak	Horizontal
	6737.5	37.7	6.3	44.0	74.0	-30.0	Peak	Horizontal
	10256.5	37.7	13.3	51.0	74.0	-23.0	Peak	Horizontal
	4621.0	38.5	1.5	40.0	74.0	-34.0	Peak	Vertical
	6134.0	38.1	4.3	42.4	74.0	-31.6	Peak	Vertical
	9517.0	38.1	11.4	49.5	74.0	-24.5	Peak	Vertical
06	4629.5	38.8	1.4	40.2	74.0	-33.8	Peak	Horizontal
	7256.0	36.0	8.9	44.9	74.0	-29.1	Peak	Horizontal
	10256.5	37.1	13.3	50.4	74.0	-23.6	Peak	Horizontal
	4621.0	38.4	1.5	39.9	74.0	-34.1	Peak	Vertical
	6712.0	37.6	6.0	43.6	74.0	-30.4	Peak	Vertical
	9491.5	37.5	11.7	49.2	74.0	-24.8	Peak	Vertical
11	5063.0	38.7	1.9	40.6	74.0	-33.4	Peak	Horizontal
	6848.0	37.9	6.8	44.7	74.0	-29.3	Peak	Horizontal
	9474.5	37.8	11.5	49.3	74.0	-24.7	Peak	Horizontal
	5981.0	38.1	4.0	42.1	74.0	-31.9	Peak	Vertical
	8412.0	37.1	9.9	47.0	74.0	-27.0	Peak	Vertical
	10724.0	35.8	14.7	50.5	74.0	-23.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11g – MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4612.5	39.1	1.5	40.6	74.0	-33.4	Peak	Horizontal
	6091.5	38.3	4.3	42.6	74.0	-31.4	Peak	Horizontal
	8820.0	37.4	11.6	49.0	74.0	-25.0	Peak	Horizontal
	3975.0	40.6	-1.9	38.7	74.0	-35.3	Peak	Vertical
	6788.5	37.7	6.2	43.9	74.0	-30.1	Peak	Vertical
	8811.5	37.4	11.8	49.2	74.0	-24.8	Peak	Vertical
06	4332.0	40.7	-0.4	40.3	74.0	-33.7	Peak	Horizontal
	6091.5	38.2	4.3	42.5	74.0	-31.5	Peak	Horizontal
	8743.5	36.6	12.0	48.6	74.0	-25.4	Peak	Horizontal
	4697.5	39.3	1.6	40.9	74.0	-33.1	Peak	Vertical
	6856.5	37.7	6.7	44.4	74.0	-29.6	Peak	Vertical
	9449.0	38.3	11.8	50.1	74.0	-23.9	Peak	Vertical
11	4986.5	39.2	1.4	40.6	74.0	-33.4	Peak	Horizontal
	6941.5	37.1	7.3	44.4	74.0	-29.6	Peak	Horizontal
	10341.5	36.9	14.0	50.9	74.0	-23.1	Peak	Horizontal
	5012.0	39.0	2.1	41.1	74.0	-32.9	Peak	Vertical
	7468.5	36.5	9.3	45.8	74.0	-28.2	Peak	Vertical
	9449.0	37.9	11.8	49.7	74.0	-24.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11n-HT20- MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	5054.5	38.4	1.8	40.2	74.0	-33.8	Peak	Horizontal
	7162.5	36.6	8.6	45.2	74.0	-28.8	Peak	Horizontal
	9984.5	36.9	12.8	49.7	74.0	-24.3	Peak	Horizontal
	5071.5	39.1	2.0	41.1	74.0	-32.9	Peak	Vertical
	7409.0	36.6	9.5	46.1	74.0	-27.9	Peak	Vertical
	10885.5	36.3	14.8	51.1	74.0	-22.9	Peak	Vertical
06	4621.0	38.5	1.5	40.0	74.0	-34.0	Peak	Horizontal
	6788.5	38.2	6.2	44.4	74.0	-29.6	Peak	Horizontal
	9568.0	38.2	11.6	49.8	74.0	-24.2	Peak	Horizontal
	6032.0	37.9	4.0	41.9	74.0	-32.1	Peak	Vertical
	7298.5	36.1	9.1	45.2	74.0	-28.8	Peak	Vertical
	9474.5	37.8	11.5	49.3	74.0	-24.7	Peak	Vertical
11	4595.5	39.3	1.3	40.6	74.0	-33.4	Peak	Horizontal
	6695.0	37.9	6.0	43.9	74.0	-30.1	Peak	Horizontal
	9372.5	37.7	11.8	49.5	74.0	-24.5	Peak	Horizontal
	4578.5	38.9	1.1	40.0	74.0	-34.0	Peak	Vertical
	6848.0	37.7	6.8	44.5	74.0	-29.5	Peak	Vertical
	9568.0	38.0	11.6	49.6	74.0	-24.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11n-HT40- MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3966.5	39.0	-1.8	37.2	74.0	-36.8	Peak	Horizontal
	4842.0	36.8	1.5	38.3	74.0	-35.7	Peak	Horizontal
	7638.5	33.4	8.8	42.2	74.0	-31.8	Peak	Horizontal
	3949.5	37.1	-1.9	35.2	74.0	-38.8	Peak	Vertical
	5063.0	36.0	1.9	37.9	74.0	-36.1	Peak	Vertical
	7502.5	31.8	9.3	41.1	74.0	-32.9	Peak	Vertical
06	3958.0	38.1	-1.8	36.3	74.0	-37.7	Peak	Horizontal
	4842.0	36.4	1.5	37.9	74.0	-36.1	Peak	Horizontal
	7366.5	34.2	9.3	43.5	74.0	-30.5	Peak	Horizontal
	3983.5	38.1	-1.9	36.2	74.0	-37.8	Peak	Vertical
	5012.0	36.5	2.1	38.6	74.0	-35.4	Peak	Vertical
	7655.5	35.0	8.9	43.9	74.0	-30.1	Peak	Vertical
09	3992.0	37.4	-1.9	35.5	74.0	-38.5	Peak	Horizontal
	4859.0	35.5	1.5	37.0	74.0	-37.0	Peak	Horizontal
	11659.0	30.2	14.7	44.9	74.0	-29.1	Peak	Horizontal
	3822.0	37.0	-1.3	35.7	74.0	-38.3	Peak	Vertical
	4867.5	34.5	1.5	36.0	74.0	-38.0	Peak	Vertical
	11574.0	30.8	15.4	46.2	74.0	-27.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11ax-HE20- MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4017.5	38.0	-2.0	36.0	74.0	-38.0	Peak	Horizontal
	4884.5	35.9	1.3	37.2	74.0	-36.8	Peak	Horizontal
	7434.5	34.3	9.5	43.8	74.0	-30.2	Peak	Horizontal
	3975.0	39.1	-1.9	37.2	74.0	-36.8	Peak	Vertical
	4918.5	37.2	1.3	38.5	74.0	-35.5	Peak	Vertical
	7596.0	34.0	9.3	43.3	74.0	-30.7	Peak	Vertical
06	3966.5	38.0	-1.8	36.2	74.0	-37.8	Peak	Horizontal
	4876.0	36.2	1.5	37.7	74.0	-36.3	Peak	Horizontal
	7451.5	34.3	9.5	43.8	74.0	-30.2	Peak	Horizontal
	4323.5	37.0	-0.2	36.8	74.0	-37.2	Peak	Vertical
	7519.5	32.6	9.3	41.9	74.0	-32.1	Peak	Vertical
	11667.5	30.2	14.9	45.1	74.0	-28.9	Peak	Vertical
11	4017.5	38.9	-2.0	36.9	74.0	-37.1	Peak	Horizontal
	4689.0	36.8	1.7	38.5	74.0	-35.5	Peak	Horizontal
	7434.5	33.7	9.5	43.2	74.0	-30.8	Peak	Horizontal
	3941.0	38.1	-2.0	36.1	74.0	-37.9	Peak	Vertical
	4655.0	37.4	1.5	38.9	74.0	-35.1	Peak	Vertical
	11659.0	30.6	14.7	45.3	74.0	-28.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/04/27~2022/04/28	Test Mode:	802.11ax-HE40- MIMO
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3890.0	37.9	-1.7	36.2	74.0	-37.8	Peak	Horizontal
	4850.5	36.9	1.5	38.4	74.0	-35.6	Peak	Horizontal
	7596.0	34.1	9.3	43.4	74.0	-30.6	Peak	Horizontal
	3907.0	38.4	-1.9	36.5	74.0	-37.5	Peak	Vertical
	4850.5	36.4	1.5	37.9	74.0	-36.1	Peak	Vertical
	7417.5	33.8	9.5	43.3	74.0	-30.7	Peak	Vertical
06	3805.0	37.7	-1.5	36.2	74.0	-37.8	Peak	Horizontal
	4799.5	36.6	1.4	38.0	74.0	-36.0	Peak	Horizontal
	7553.5	31.9	8.9	40.8	74.0	-33.2	Peak	Horizontal
	3992.0	38.0	-1.9	36.1	74.0	-37.9	Peak	Vertical
	4935.5	36.8	1.5	38.3	74.0	-35.7	Peak	Vertical
	7621.5	35.9	8.7	44.6	74.0	-29.4	Peak	Vertical
09	3941.0	38.5	-2.0	36.5	74.0	-37.5	Peak	Horizontal
	5003.5	37.1	1.8	38.9	74.0	-35.1	Peak	Horizontal
	7400.5	33.4	9.4	42.8	74.0	-31.2	Peak	Horizontal
	3975.0	38.9	-1.9	37.0	74.0	-37.0	Peak	Vertical
	4850.5	36.2	1.5	37.7	74.0	-36.3	Peak	Vertical
	7434.5	34.5	9.5	44.0	74.0	-30.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Partial RU Mode

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/05/19	Test Mode:	802.11ax20-MIMO-26 Tone
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7460.000	34.8	9.4	44.2	74.0	-29.8	Peak	Horizontal
	8327.000	34.6	9.4	44.0	74.0	-30.0	Peak	Horizontal
	11429.500	32.4	15.1	47.5	74.0	-26.5	Peak	Horizontal
	7468.500	35.0	9.3	44.3	74.0	-29.7	Peak	Vertical
	8395.000	34.7	9.8	44.5	74.0	-29.5	Peak	Vertical
	11200.000	33.5	15.6	49.1	74.0	-24.9	Peak	Vertical
06	7502.500	34.9	9.3	44.2	74.0	-29.8	Peak	Horizontal
	8165.500	35.6	9.2	44.8	74.0	-29.2	Peak	Horizontal
	11132.000	33.1	15.3	48.4	74.0	-25.6	Peak	Horizontal
	7485.500	34.5	9.2	43.7	74.0	-30.3	Peak	Vertical
	8301.500	34.4	9.6	44.0	74.0	-30.0	Peak	Vertical
	11446.500	34.2	15.1	49.3	74.0	-24.7	Peak	Vertical
11	7358.000	36.0	9.2	45.2	74.0	-28.8	Peak	Horizontal
	8395.000	35.6	9.8	45.4	74.0	-28.6	Peak	Horizontal
	11446.500	34.2	15.1	49.3	74.0	-24.7	Peak	Horizontal
	7681.000	36.2	8.8	45.0	74.0	-29.0	Peak	Vertical
	8242.000	34.6	9.3	43.9	74.0	-30.1	Peak	Vertical
	11132.000	33.9	15.3	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/05/19	Test Mode:	802.11ax20-MIMO-242 Tone
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7375.000	35.0	9.4	44.4	74.0	-29.6	Peak	Horizontal
	8352.500	34.2	9.8	44.0	74.0	-30.0	Peak	Horizontal
	11387.000	32.8	14.9	47.7	74.0	-26.3	Peak	Horizontal
	7494.000	35.2	9.2	44.4	74.0	-29.6	Peak	Vertical
	8259.000	35.6	9.1	44.7	74.0	-29.3	Peak	Vertical
	11336.000	34.3	14.9	49.2	74.0	-24.8	Peak	Vertical
06	7536.500	35.5	9.1	44.6	74.0	-29.4	Peak	Horizontal
	8242.000	34.7	9.3	44.0	74.0	-30.0	Peak	Horizontal
	11438.000	32.1	15.2	47.3	74.0	-26.7	Peak	Horizontal
	7443.000	33.8	9.5	43.3	74.0	-30.7	Peak	Vertical
	8165.500	37.3	9.2	46.5	74.0	-27.5	Peak	Vertical
	11149.000	33.4	15.5	48.9	74.0	-25.1	Peak	Vertical
11	7400.500	34.7	9.4	44.1	74.0	-29.9	Peak	Horizontal
	8276.000	35.2	9.3	44.5	74.0	-29.5	Peak	Horizontal
	11336.000	34.3	14.9	49.2	74.0	-24.8	Peak	Horizontal
	7519.500	34.5	9.3	43.8	74.0	-30.2	Peak	Vertical
	8276.000	34.7	9.3	44.0	74.0	-30.0	Peak	Vertical
	11344.500	31.8	15.0	46.8	74.0	-27.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/05/19	Test Mode:	802.11ax40-MIMO-26 Tone
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7434.500	34.2	9.5	43.7	74.0	-30.3	Peak	Horizontal
	8310.000	34.7	9.7	44.4	74.0	-29.6	Peak	Horizontal
	11327.500	31.9	14.8	46.7	74.0	-27.3	Peak	Horizontal
	7383.500	35.7	9.4	45.1	74.0	-28.9	Peak	Vertical
	8233.500	35.9	9.4	45.3	74.0	-28.7	Peak	Vertical
	11438.000	33.9	15.2	49.1	74.0	-24.9	Peak	Vertical
06	7460.000	34.4	9.4	43.8	74.0	-30.2	Peak	Horizontal
	8140.000	34.6	9.5	44.1	74.0	-29.9	Peak	Horizontal
	11225.500	32.3	15.0	47.3	74.0	-26.7	Peak	Horizontal
	7426.000	33.1	9.5	42.6	74.0	-31.4	Peak	Vertical
	8403.500	35.4	9.9	45.3	74.0	-28.7	Peak	Vertical
	12058.500	33.9	15.0	48.9	74.0	-25.1	Peak	Vertical
09	7485.500	34.0	9.2	43.2	74.0	-30.8	Peak	Horizontal
	8199.500	34.1	9.1	43.2	74.0	-30.8	Peak	Horizontal
	11293.500	31.8	15.1	46.9	74.0	-27.1	Peak	Horizontal
	7511.000	34.7	9.4	44.1	74.0	-29.9	Peak	Vertical
	8403.500	35.0	9.9	44.9	74.0	-29.1	Peak	Vertical
	11548.500	33.0	15.7	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ben Wen
Test Date	2022/05/19	Test Mode:	802.11ax40-MIMO-484 Tone
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7477.000	35.2	9.1	44.3	74.0	-29.7	Peak	Horizontal
	8318.500	35.3	9.6	44.9	74.0	-29.1	Peak	Horizontal
	11693.000	31.6	15.3	46.9	74.0	-27.1	Peak	Horizontal
	7596.000	35.1	9.3	44.4	74.0	-29.6	Peak	Vertical
	8344.000	33.9	9.9	43.8	74.0	-30.2	Peak	Vertical
	11693.000	31.6	15.3	46.9	74.0	-27.1	Peak	Vertical
06	7383.500	34.9	9.4	44.3	74.0	-29.7	Peak	Horizontal
	8225.000	35.1	9.4	44.5	74.0	-29.5	Peak	Horizontal
	11531.500	32.6	15.5	48.1	74.0	-25.9	Peak	Horizontal
	7400.500	33.7	9.4	43.1	74.0	-30.9	Peak	Vertical
	8242.000	34.4	9.3	43.7	74.0	-30.3	Peak	Vertical
	11684.500	33.8	15.3	49.1	74.0	-24.9	Peak	Vertical
09	7536.500	33.6	9.1	42.7	74.0	-31.3	Peak	Horizontal
	8259.000	34.8	9.1	43.9	74.0	-30.1	Peak	Horizontal
	11480.500	33.8	15.4	49.2	74.0	-24.8	Peak	Horizontal
	7400.500	34.5	9.4	43.9	74.0	-30.1	Peak	Vertical
	8446.000	35.1	10.1	45.2	74.0	-28.8	Peak	Vertical
	11285.000	32.2	15.3	47.5	74.0	-26.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Test Result of Radiated Emission below 1GHz:

Site: NS-AC1	Test Data: 2022/05/12
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz – MIMO Mode	

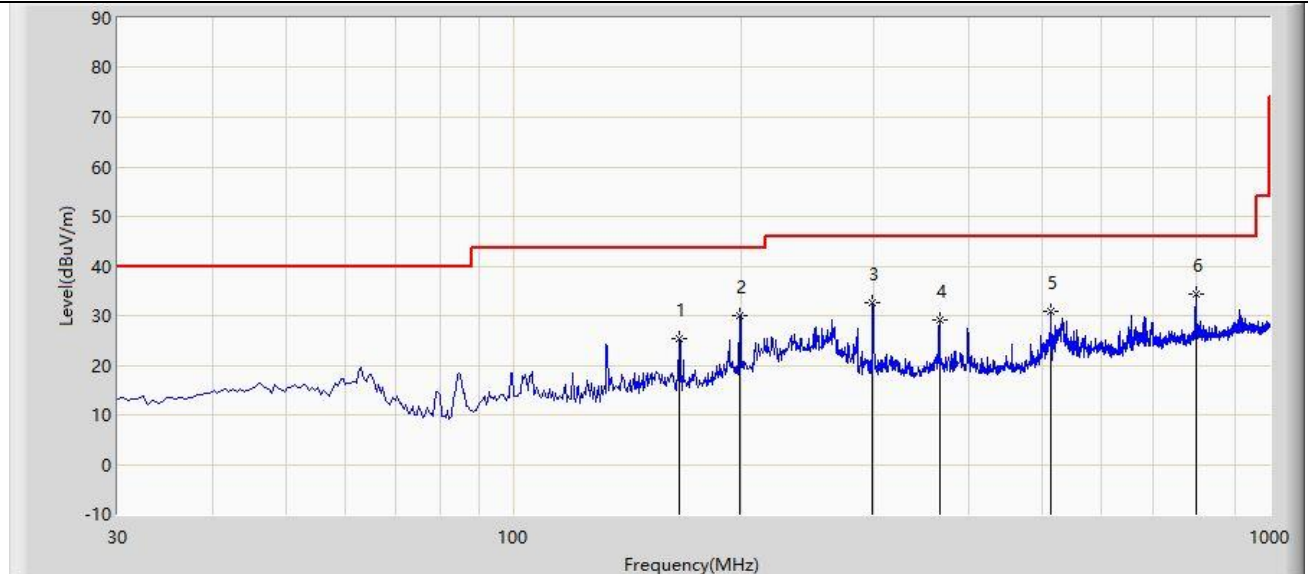

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		165.800	25.489	13.119	-18.011	43.500	12.369	PK
2		199.265	29.904	14.823	-13.596	43.500	15.082	PK
3		298.690	32.553	15.598	-13.447	46.000	16.955	PK
4		366.590	29.256	11.120	-16.744	46.000	18.136	PK
5		513.060	30.984	9.315	-15.016	46.000	21.669	PK
6	*	798.240	34.355	8.240	-11.645	46.000	26.114	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: NS-AC1	Test Data: 2022/05/12
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz – MIMO Mode	

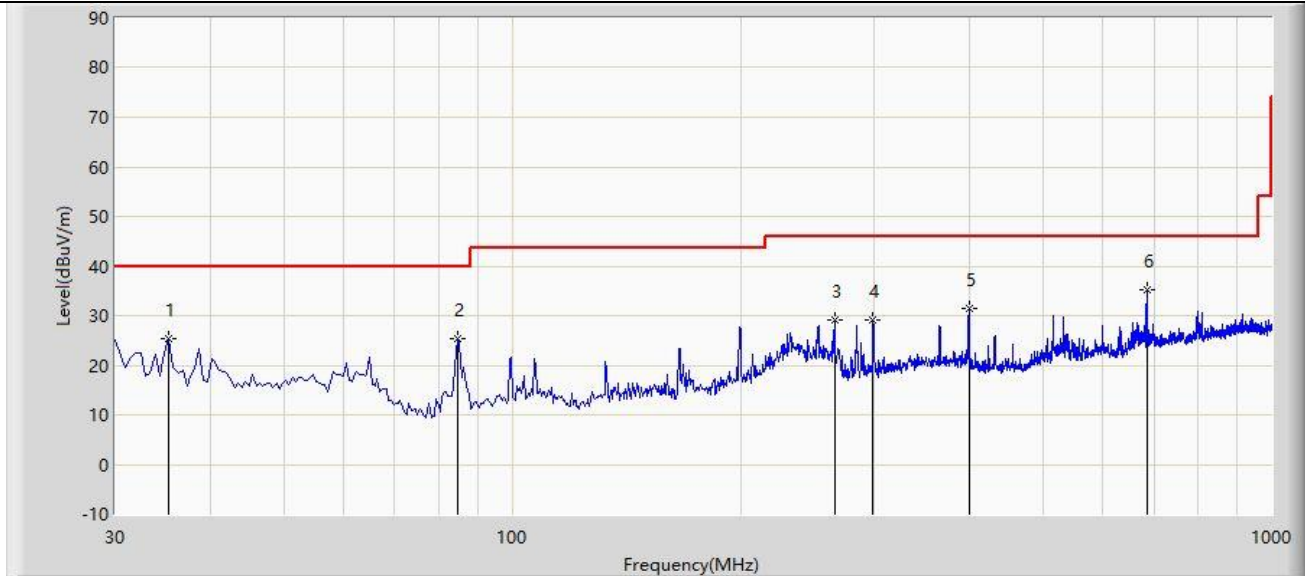

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		35.335	25.491	10.720	-14.509	40.000	14.770	PK
2		84.805	25.431	13.790	-14.569	40.000	11.641	PK
3		266.195	29.131	12.641	-16.869	46.000	16.490	PK
4		298.690	29.231	12.276	-16.769	46.000	16.955	PK
5		400.055	31.478	12.071	-14.522	46.000	19.407	PK
6	*	684.750	35.257	10.389	-10.743	46.000	24.868	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.


Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

SISO Mode

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 1	

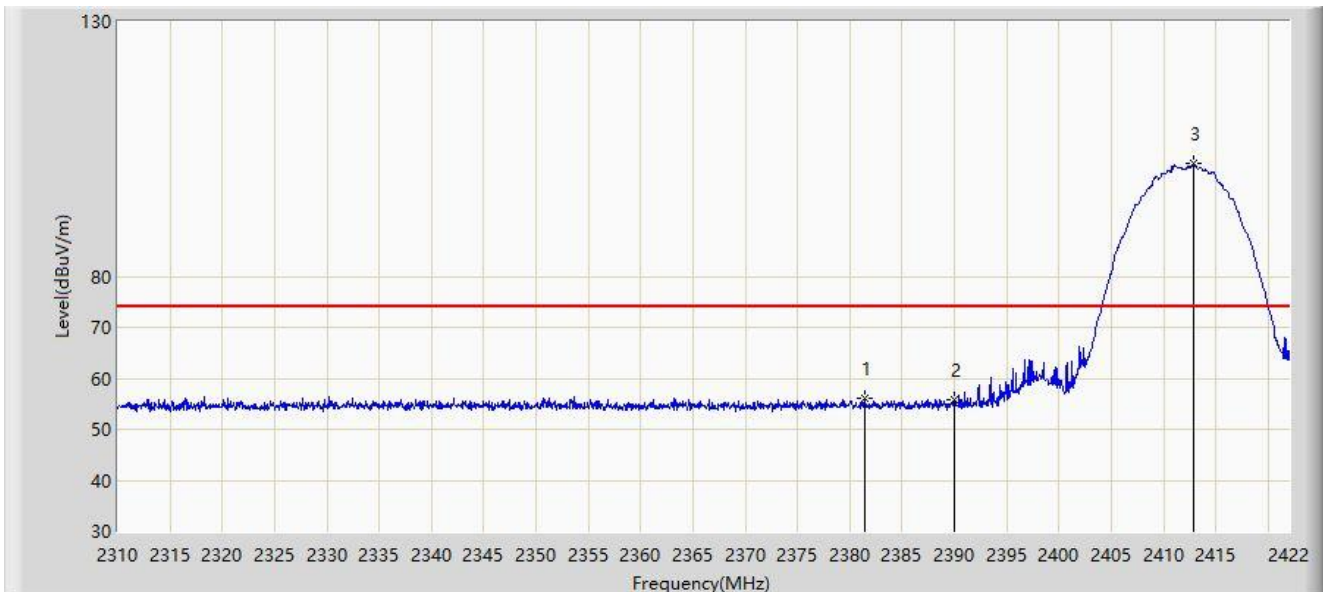


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2381.400	56.077	25.157	-17.923	74.000	30.919	PK
2			2390.000	55.770	24.853	-18.230	74.000	30.917	PK
3		*	2412.872	102.043	71.055	N/A	N/A	30.988	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 1	

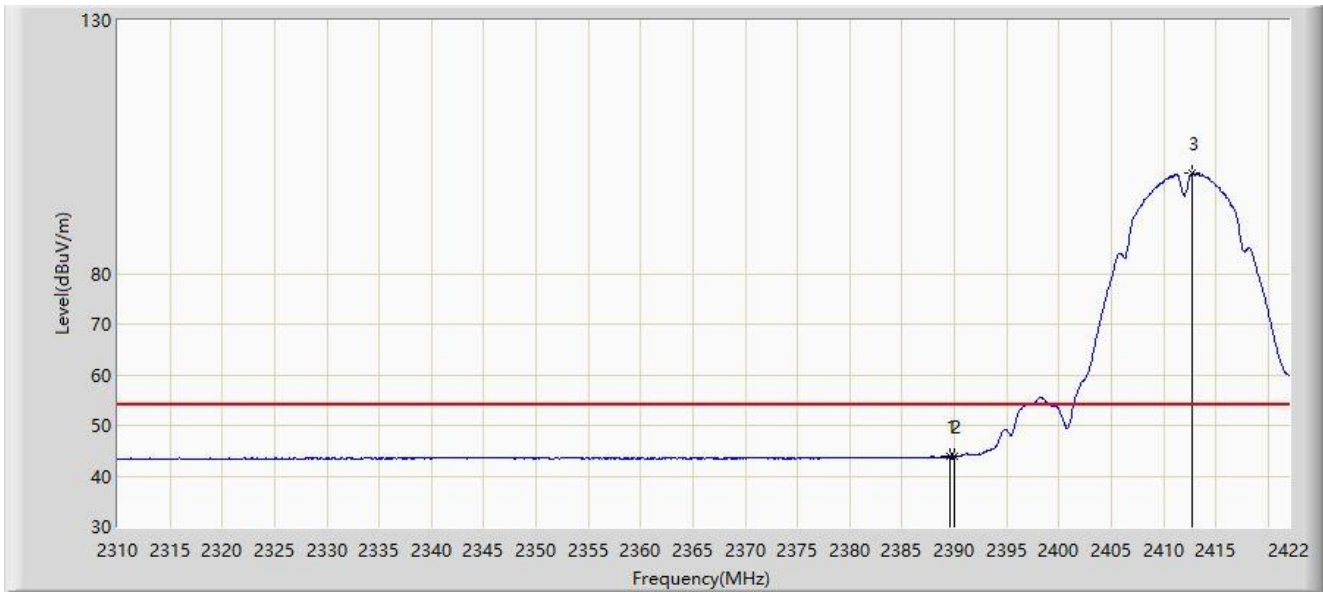


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.576	43.946	13.029	-10.054	54.000	30.917	AV
2			2390.000	43.771	12.854	-10.229	54.000	30.917	AV
3		*	2412.704	99.743	68.755	N/A	N/A	30.988	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 1	

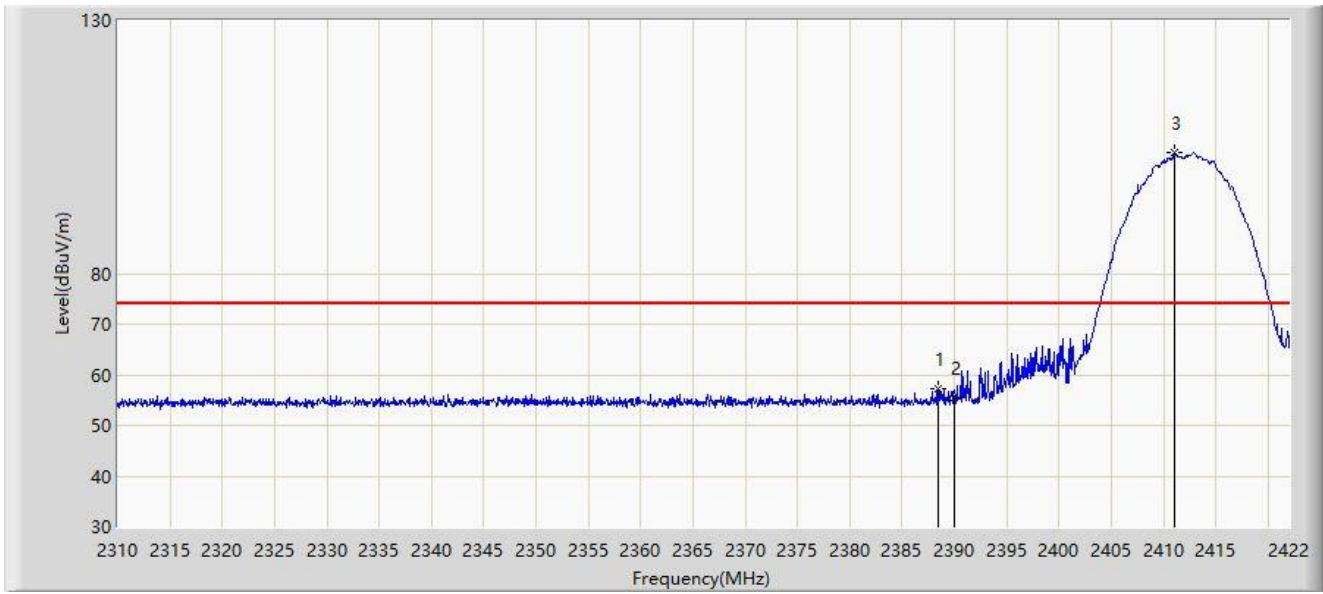


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2388.512	57.143	26.226	-16.857	74.000	30.917	PK
2			2390.000	55.577	24.660	-18.423	74.000	30.917	PK
3		*	2411.080	103.877	72.883	N/A	N/A	30.994	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 1	

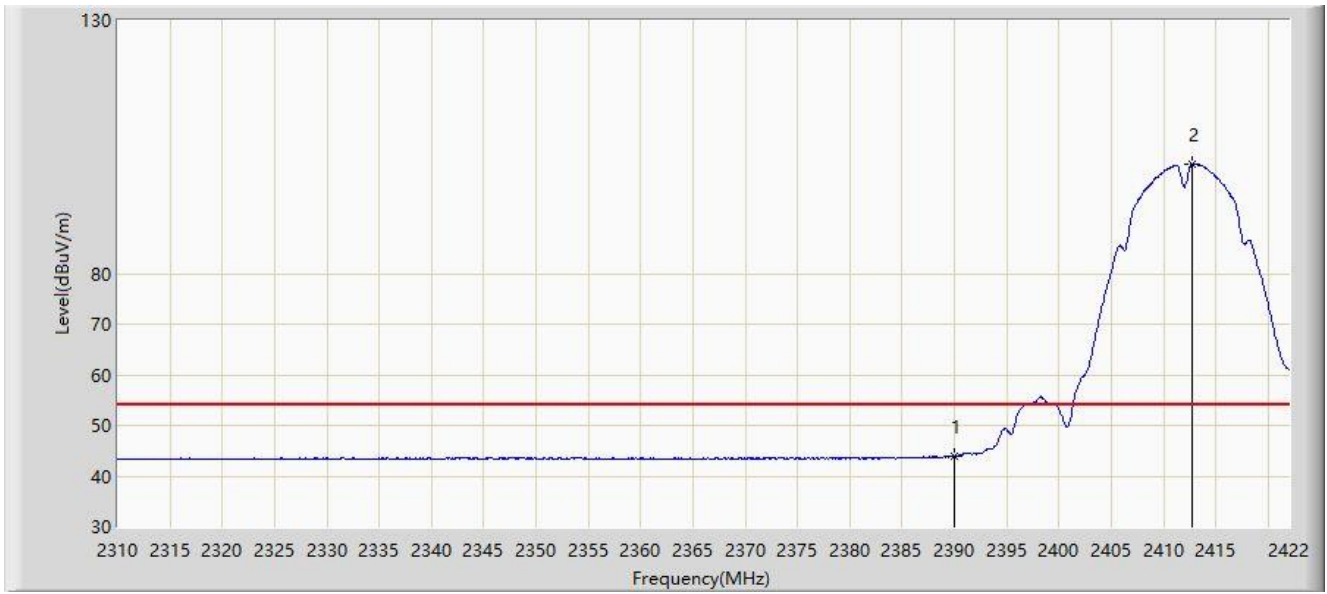


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	43.888	12.971	-10.112	54.000	30.917	AV
2		*	2412.760	101.611	70.623	N/A	N/A	30.988	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 1	

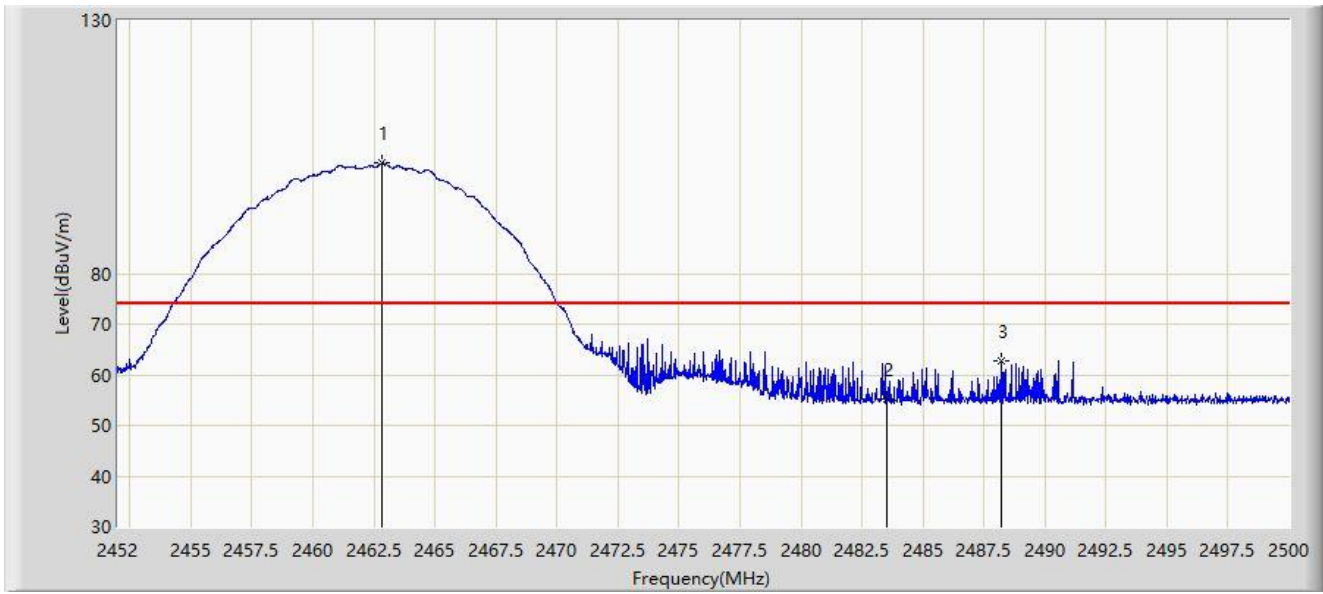


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.848	101.743	70.862	N/A	N/A	30.881	PK
2			2483.500	55.217	24.343	-18.783	74.000	30.874	PK
3			2488.216	62.680	31.784	-11.320	74.000	30.895	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 1	

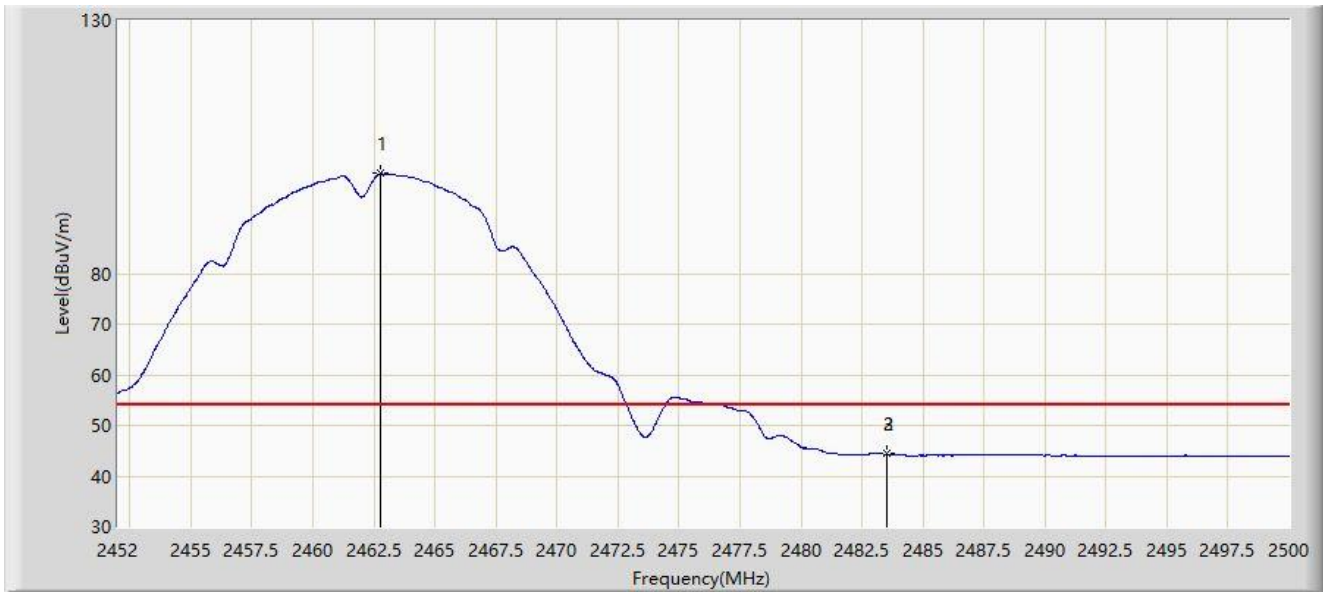


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.752	99.742	68.861	N/A	N/A	30.881	AV
2			2483.500	44.374	13.500	-9.626	54.000	30.874	AV
3			2483.536	44.412	13.538	-9.588	54.000	30.874	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 1	

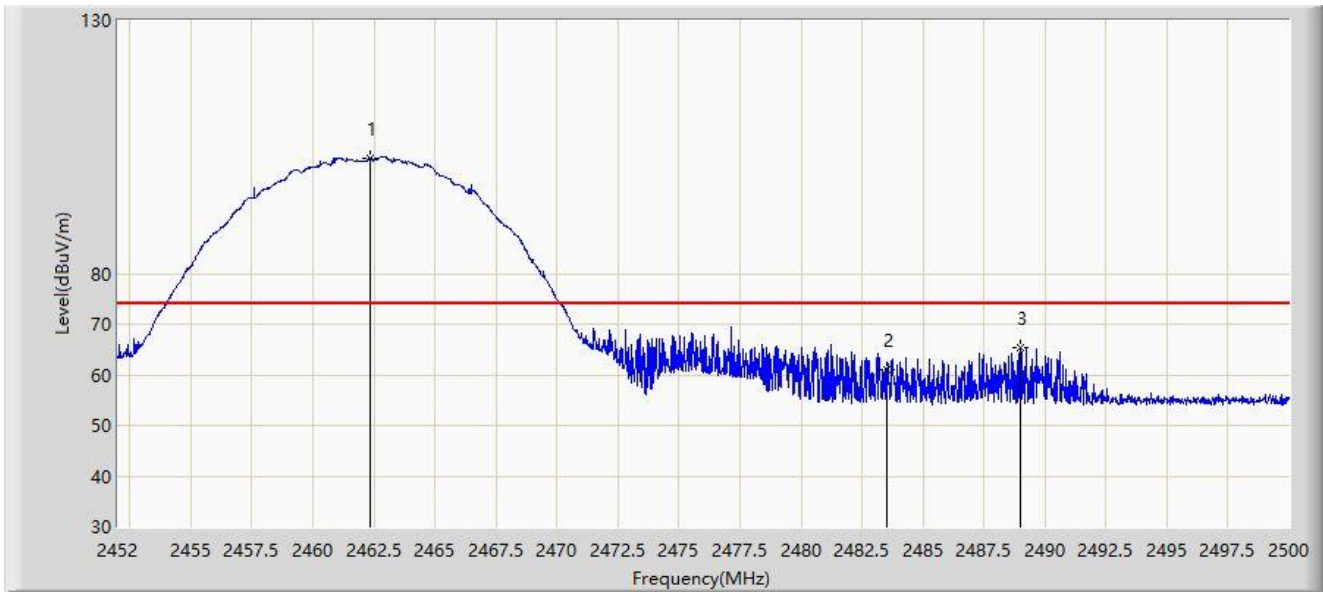


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.344	102.865	71.983	N/A	N/A	30.882	PK
2			2483.500	61.039	30.165	-12.961	74.000	30.874	PK
3			2489.008	65.396	34.497	-8.604	74.000	30.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 1	

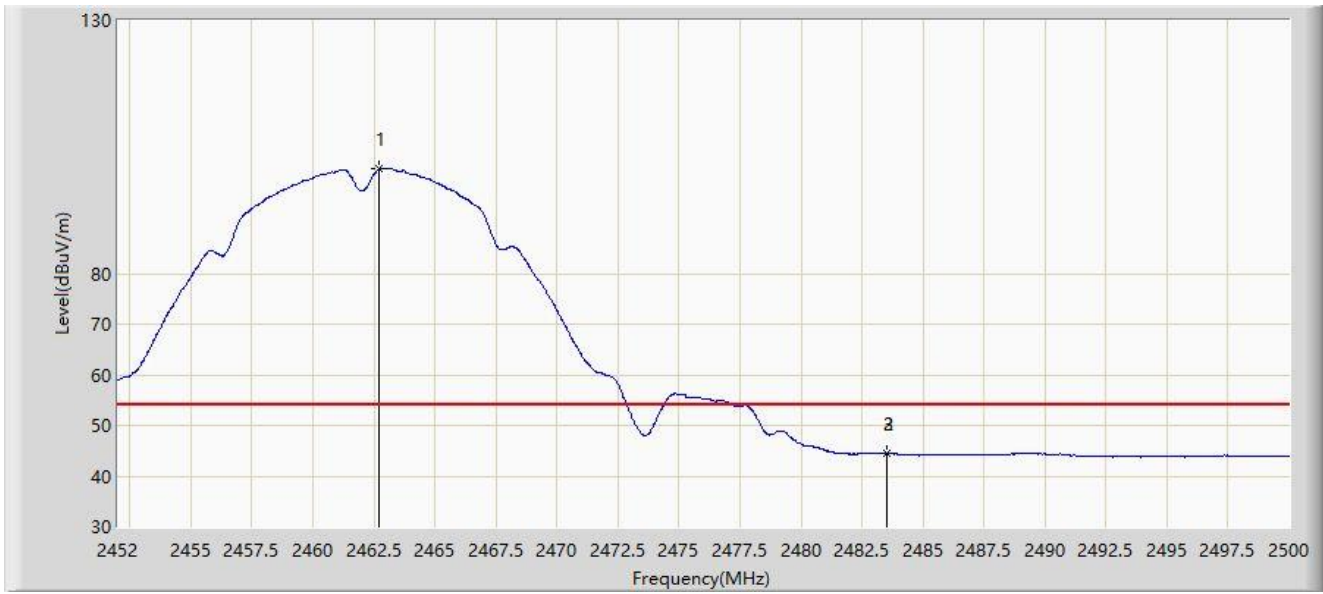


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.728	100.680	69.799	N/A	N/A	30.881	AV
2			2483.500	44.585	13.711	-9.415	54.000	30.874	AV
3			2483.512	44.589	13.715	-9.411	54.000	30.874	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 1	

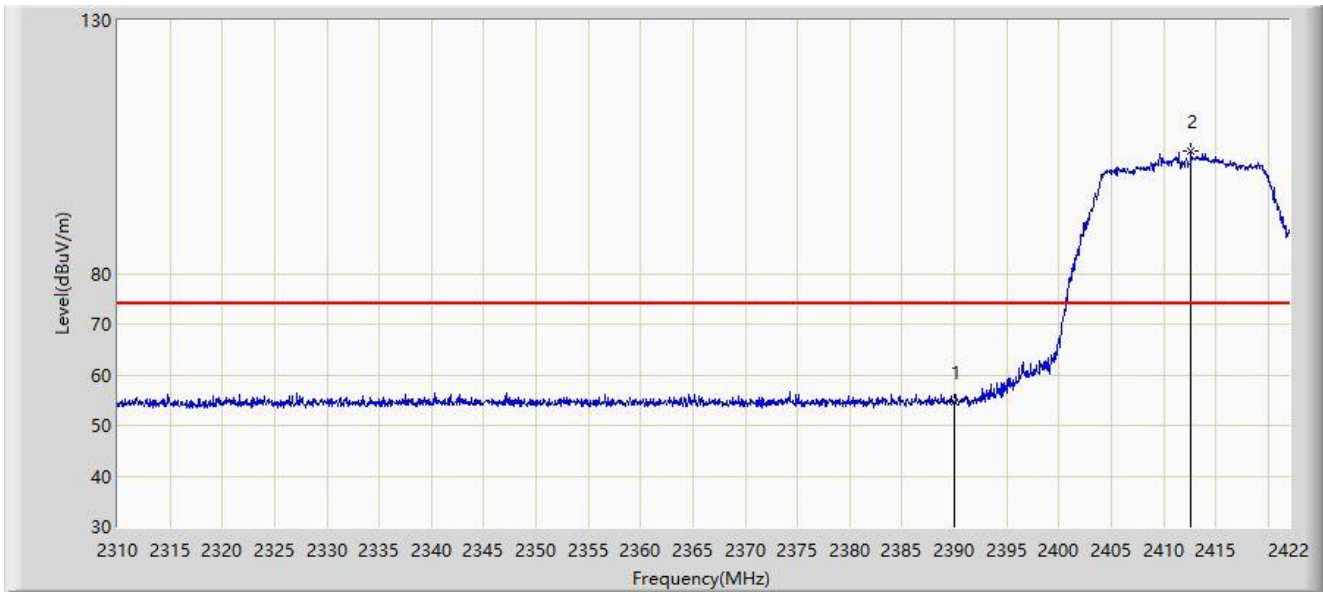


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	54.511	23.594	-19.489	74.000	30.917	PK
2		*	2412.648	104.078	73.089	N/A	N/A	30.989	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 1	

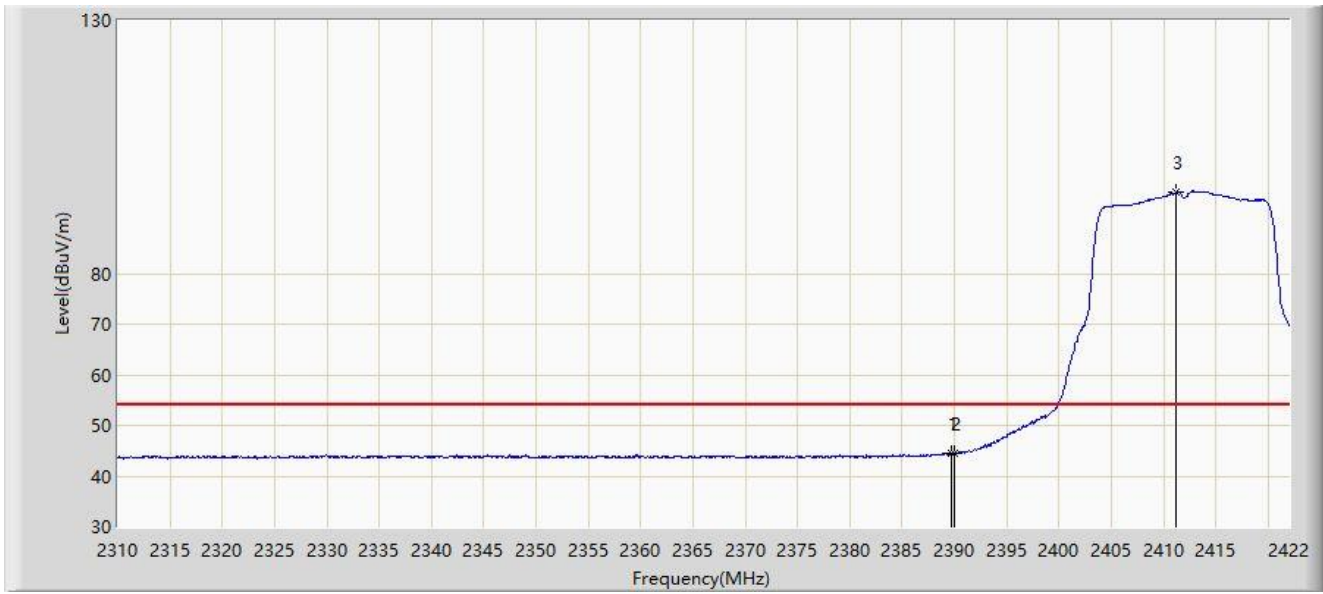


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.744	44.555	13.638	-9.445	54.000	30.917	AV
2			2390.000	44.470	13.553	-9.530	54.000	30.917	AV
3		*	2411.248	96.040	65.046	N/A	N/A	30.993	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 1	

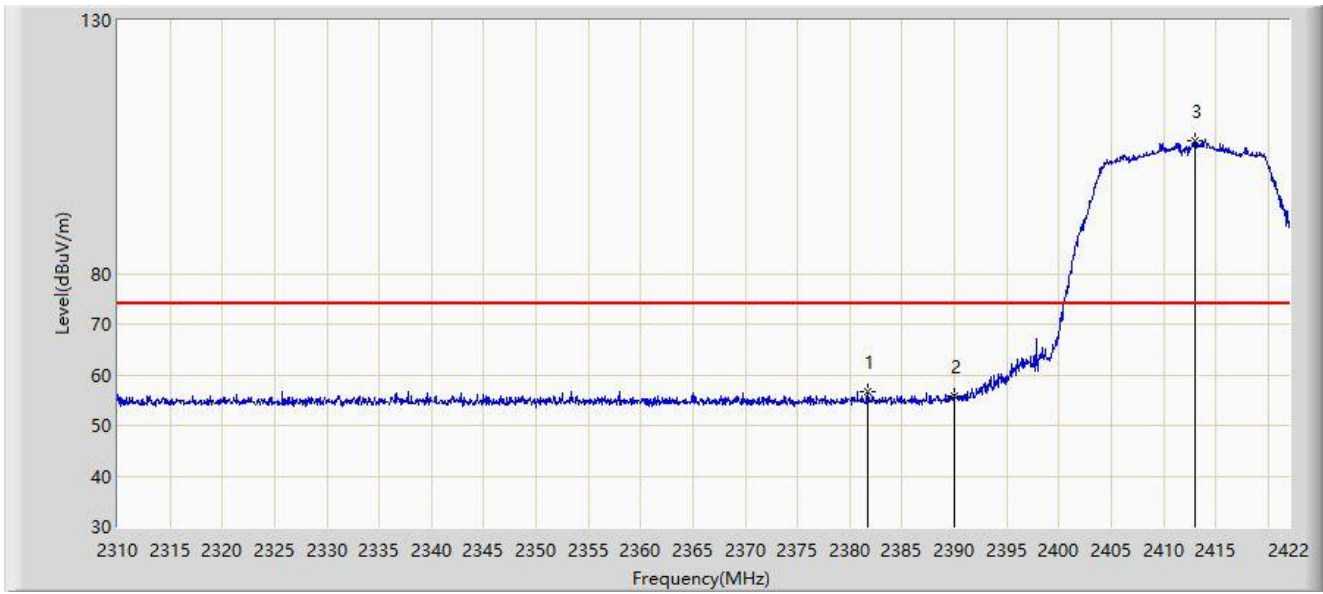


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2381.736	56.636	25.717	-17.364	74.000	30.920	PK
2			2390.000	55.824	24.907	-18.176	74.000	30.917	PK
3		*	2412.984	106.252	75.265	N/A	N/A	30.987	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 1	

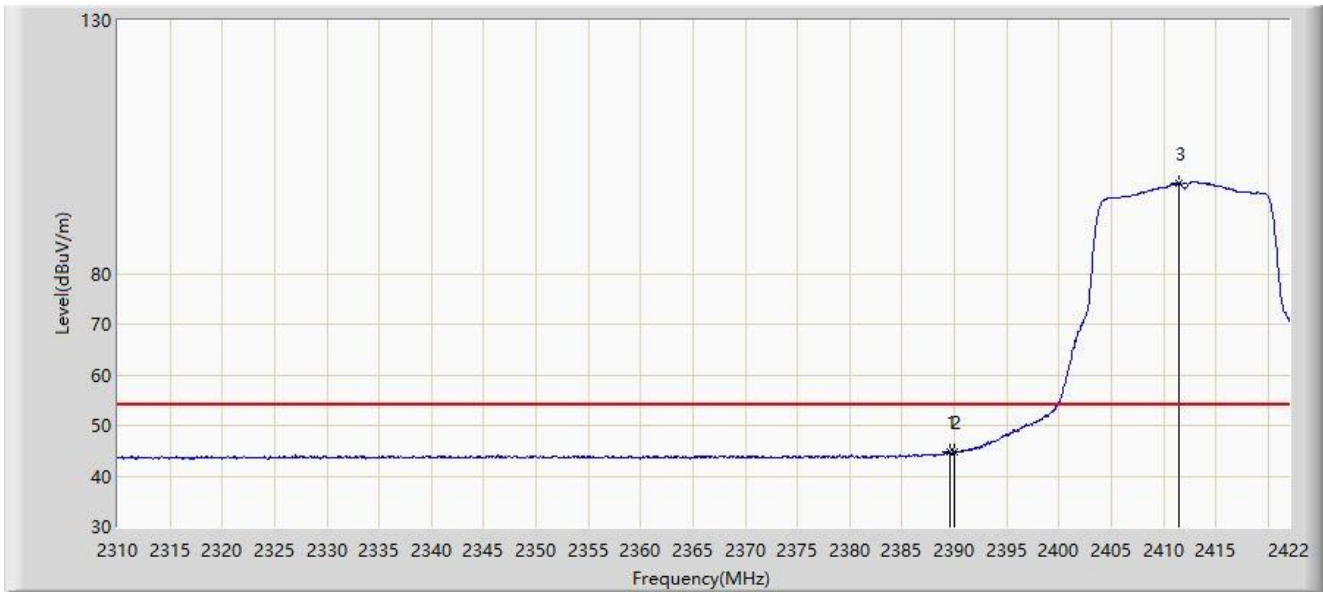


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.632	44.721	13.804	-9.279	54.000	30.918	AV
2			2390.000	44.691	13.774	-9.309	54.000	30.917	AV
3		*	2411.472	97.920	66.927	N/A	N/A	30.993	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 1	

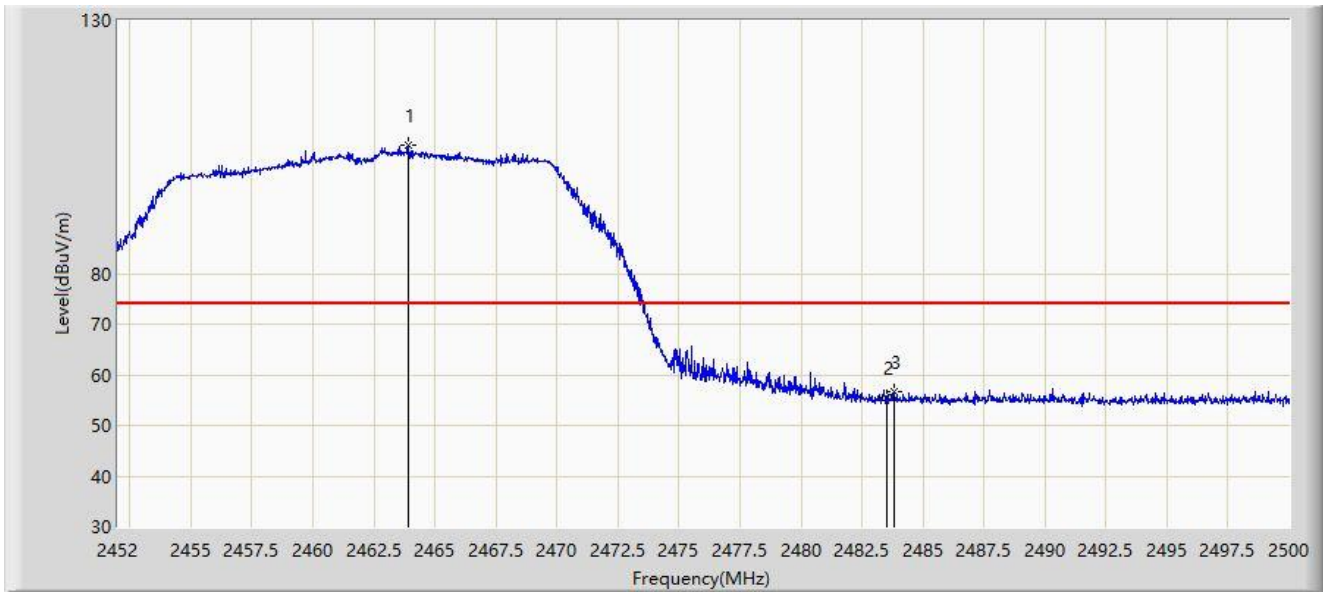


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2463.928	105.413	74.534	N/A	N/A	30.879	PK
2			2483.500	55.411	24.537	-18.589	74.000	30.874	PK
3			2483.800	56.810	25.935	-17.190	74.000	30.875	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 1	

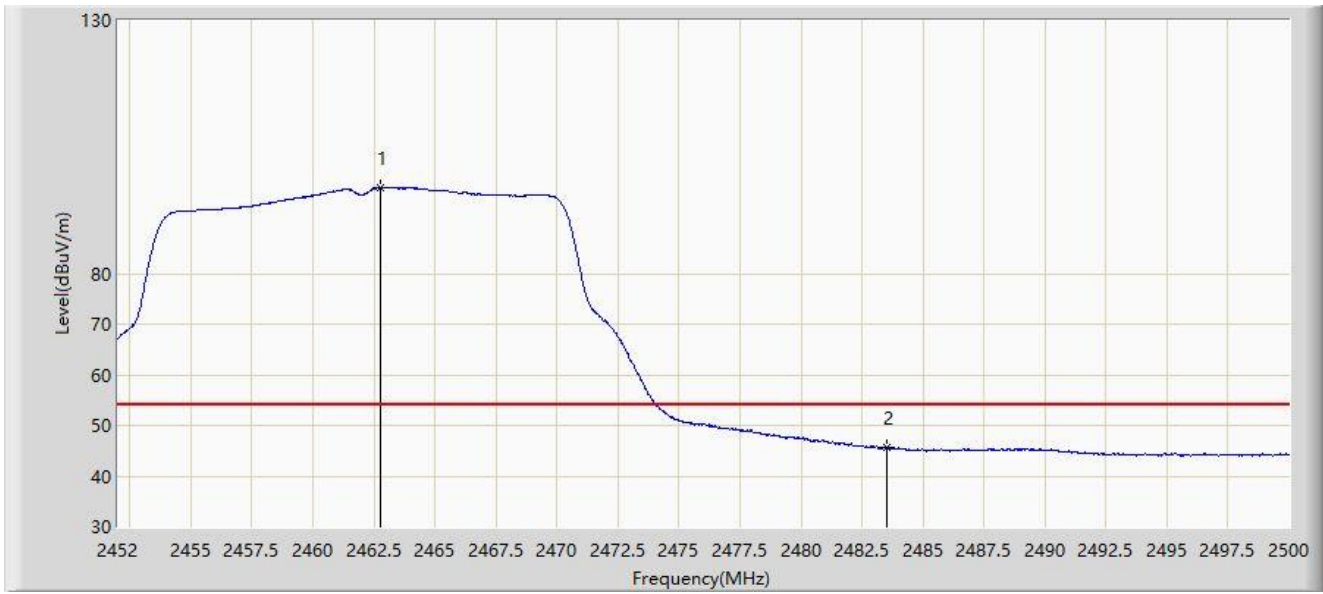


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.776	96.941	66.060	N/A	N/A	30.881	AV
2			2483.500	45.725	14.851	-8.275	54.000	30.874	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
D	Humidity: 59%
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 1	

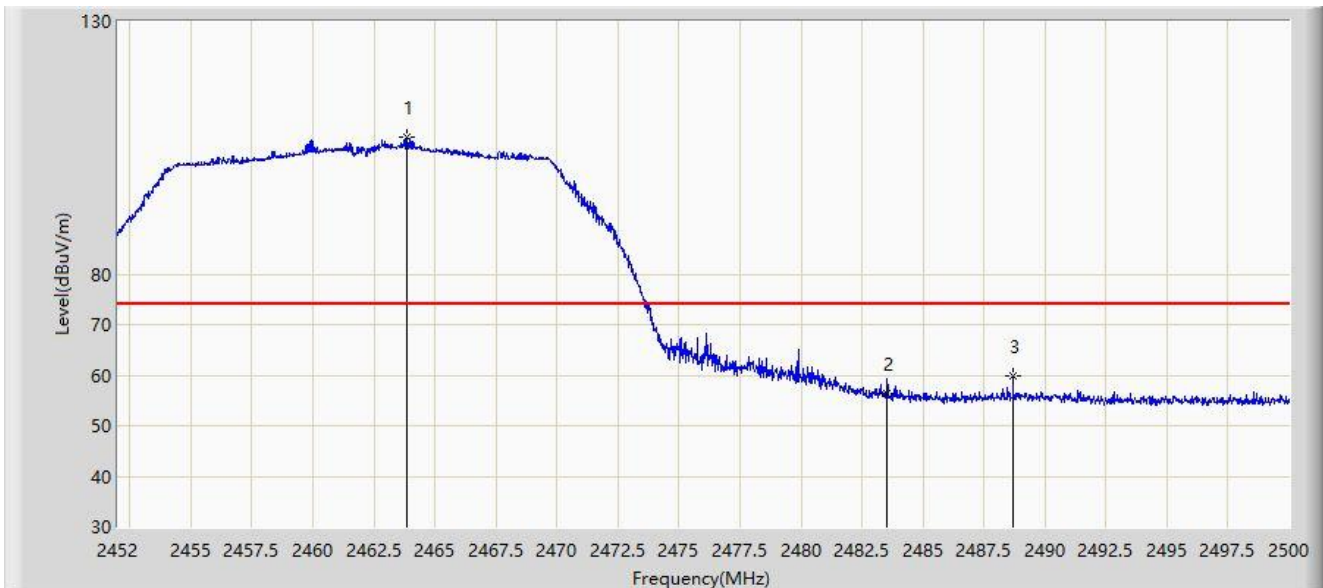


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2463.832	107.070	76.191	N/A	N/A	30.879	PK
2			2483.500	56.420	25.546	-17.580	74.000	30.874	PK
3			2488.696	59.746	28.848	-14.254	74.000	30.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 1	

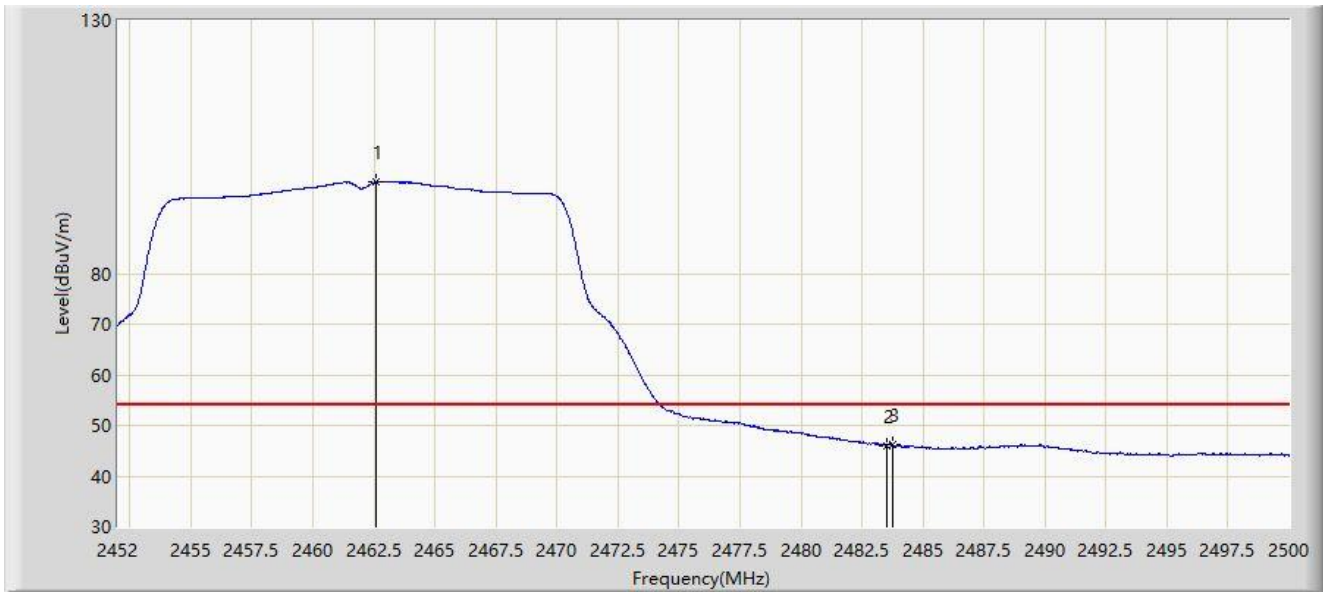


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.608	98.178	67.297	N/A	N/A	30.881	AV
2			2483.500	46.031	15.157	-7.969	54.000	30.874	AV
3			2483.752	46.300	15.425	-7.700	54.000	30.875	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2412MHz, Ant 1	

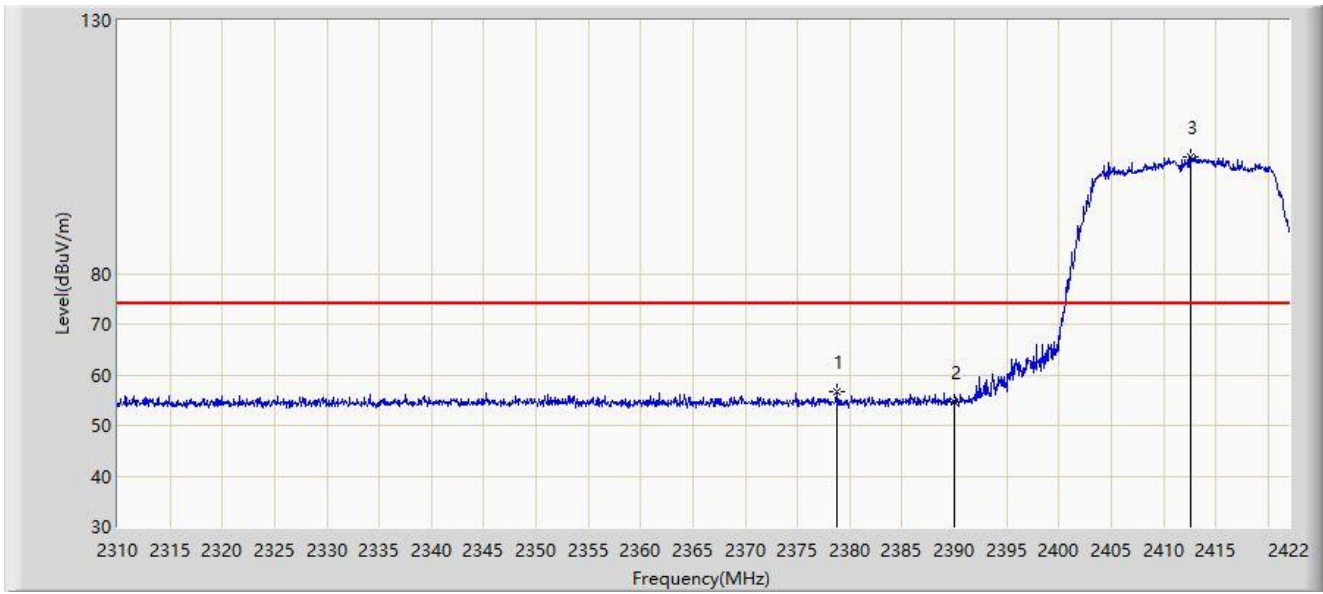


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2378.824	56.786	25.866	-17.214	74.000	30.921	PK
2			2390.000	54.777	23.860	-19.223	74.000	30.917	PK
3		*	2412.648	103.156	72.167	N/A	N/A	30.989	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2412MHz, Ant 1	

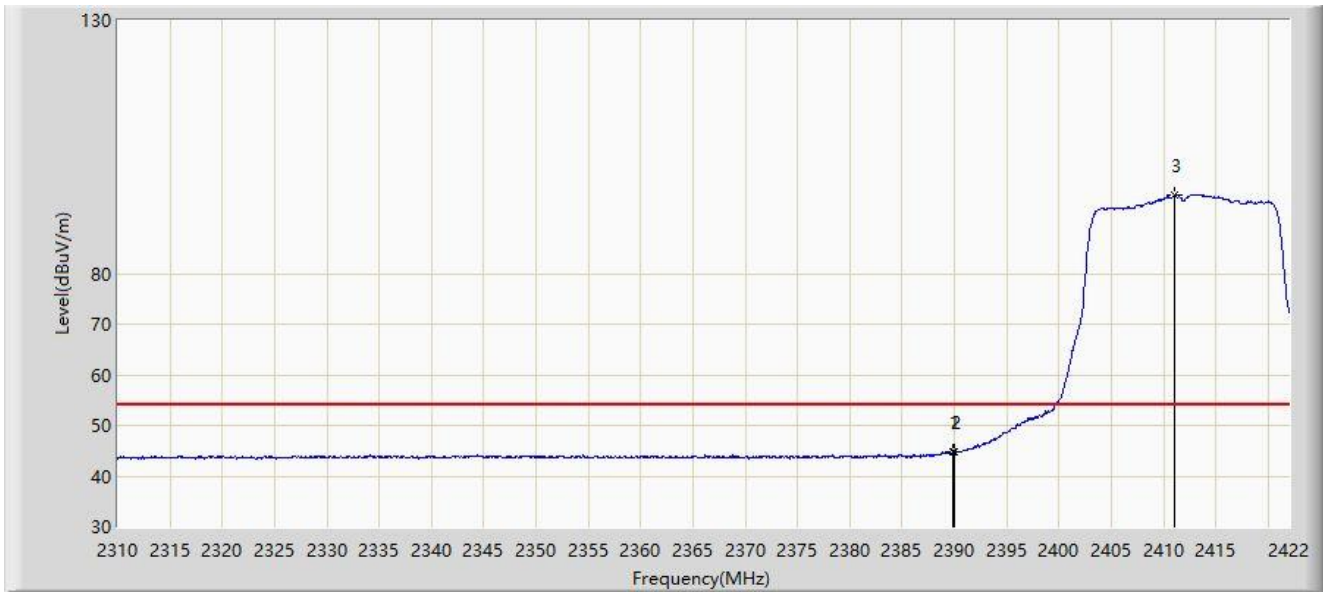


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.800	44.781	13.864	-9.219	54.000	30.917	AV
2			2390.000	44.762	13.845	-9.238	54.000	30.917	AV
3		*	2411.024	95.409	64.415	N/A	N/A	30.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2412MHz, Ant 1	

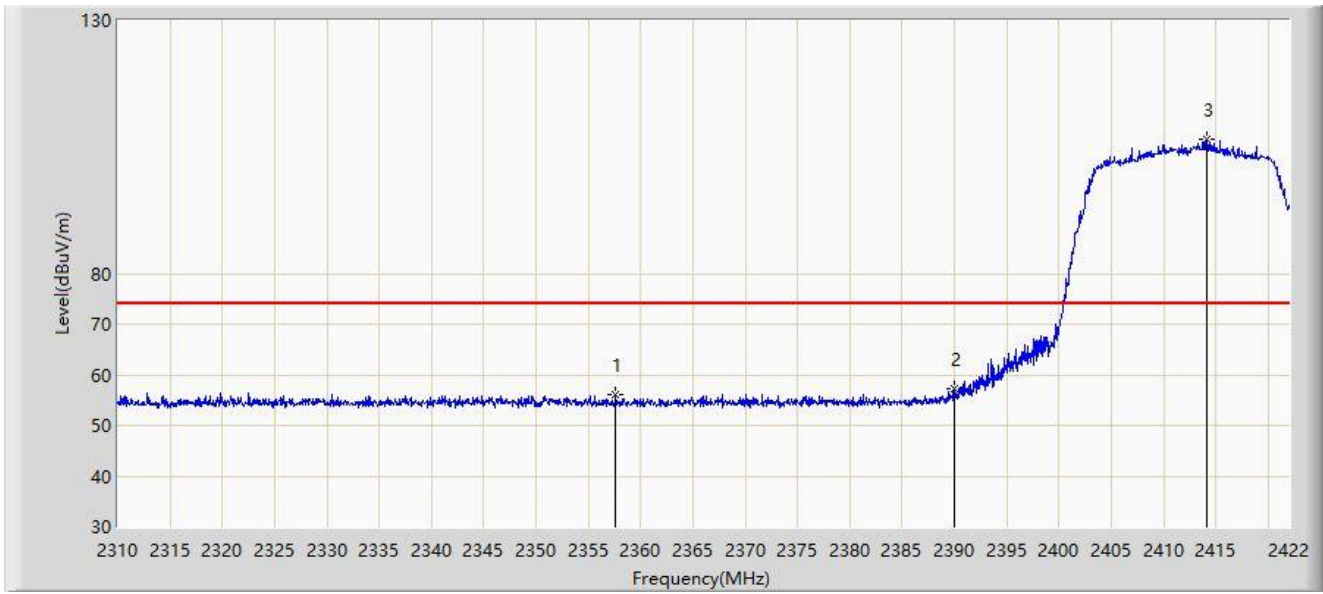


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2357.600	56.116	25.092	-17.884	74.000	31.024	PK
2			2390.000	57.109	26.192	-16.891	74.000	30.917	PK
3		*	2414.104	106.423	75.440	N/A	N/A	30.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2412MHz, Ant 1	

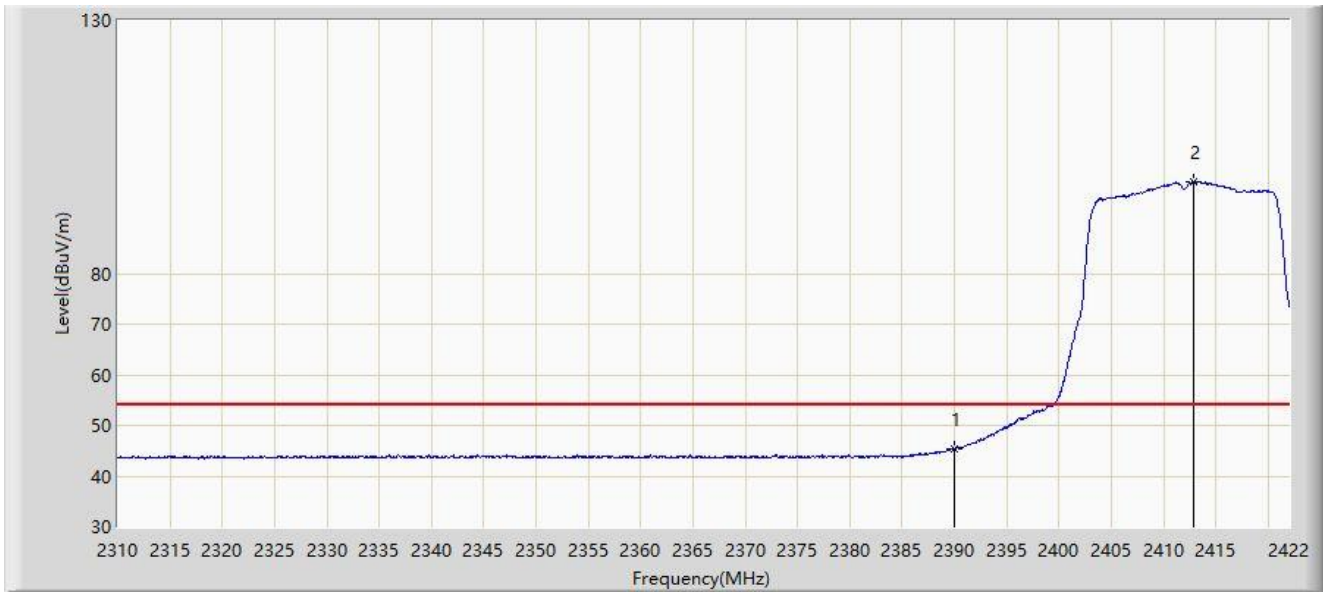


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	45.399	14.482	-8.601	54.000	30.917	AV
2		*	2412.872	98.211	67.223	N/A	N/A	30.988	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz, Ant 1	

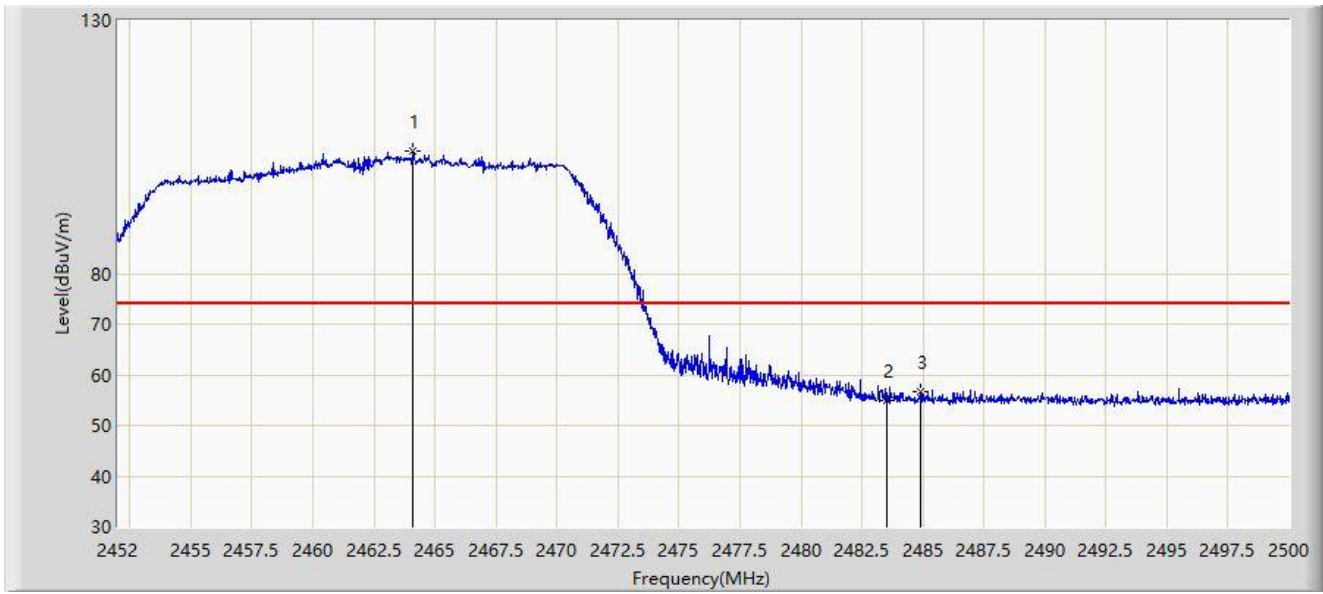


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2464.072	104.210	73.331	N/A	N/A	30.879	PK
2			2483.500	54.972	24.098	-19.028	74.000	30.874	PK
3			2484.904	56.771	25.891	-17.229	74.000	30.881	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz, Ant 1	

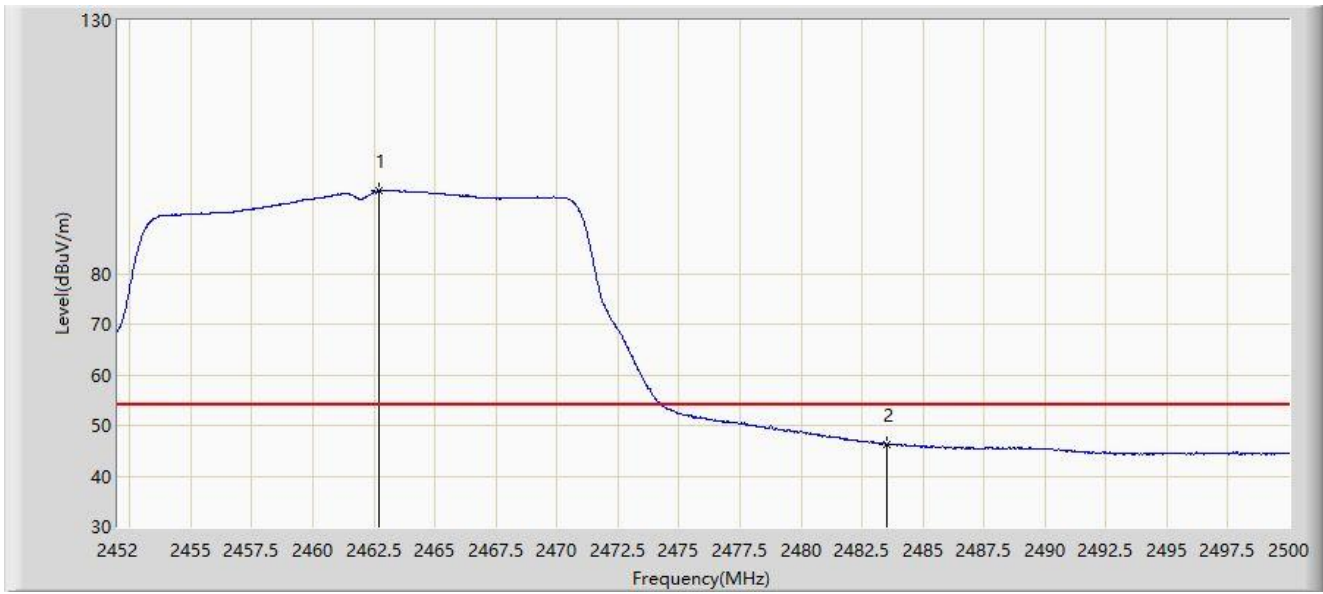


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.680	96.306	65.425	N/A	N/A	30.881	AV
2			2483.500	46.366	15.492	-7.634	54.000	30.874	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz, Ant 1	

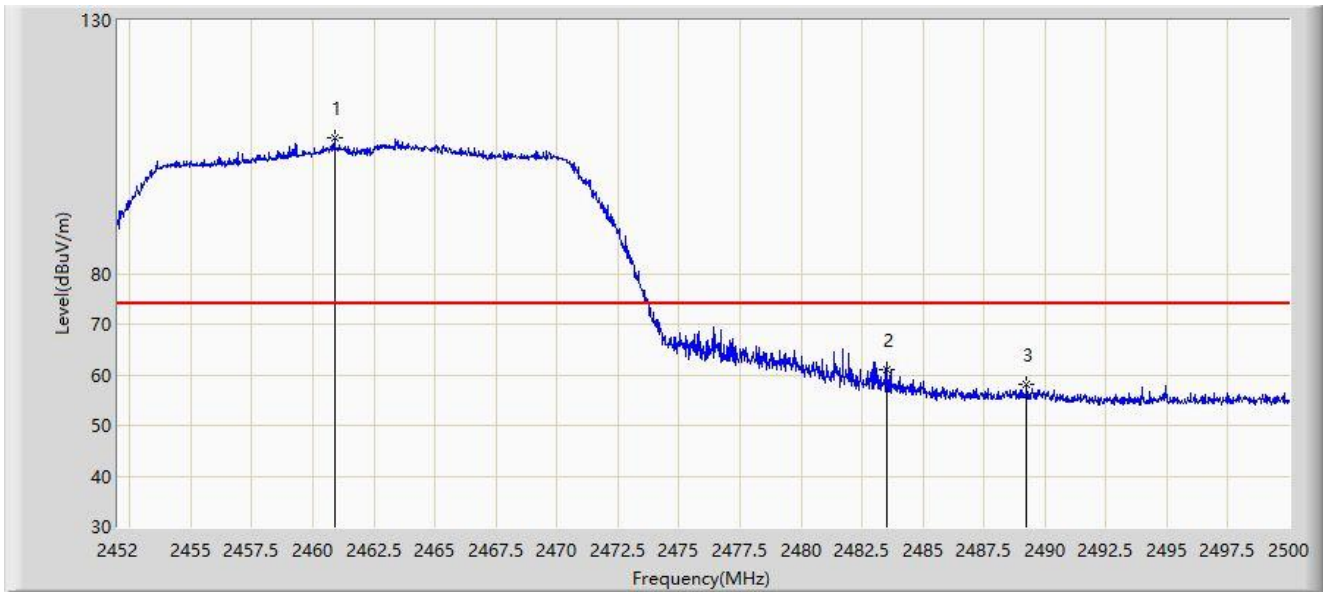


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2460.880	106.800	75.917	N/A	N/A	30.883	PK
2			2483.500	60.991	30.117	-13.009	74.000	30.874	PK
3			2489.248	58.162	27.262	-15.838	74.000	30.901	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz, Ant 1	

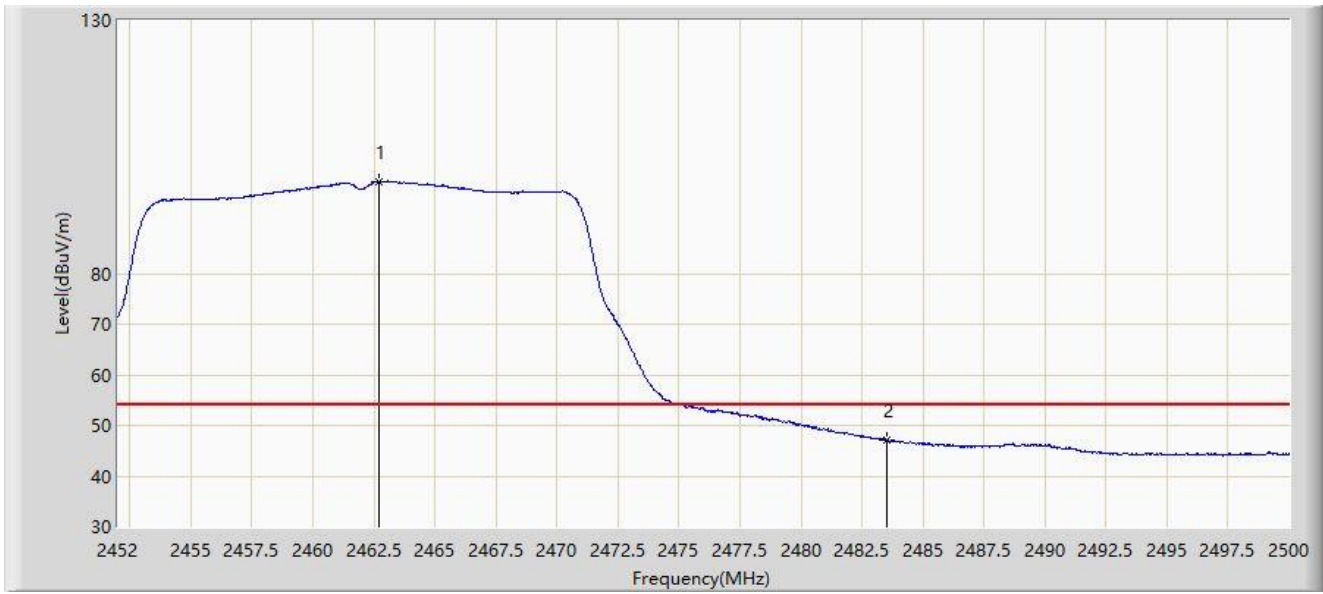


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.680	98.215	67.334	N/A	N/A	30.881	AV
2			2483.500	47.144	16.270	-6.856	54.000	30.874	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2422MHz, Ant 1	

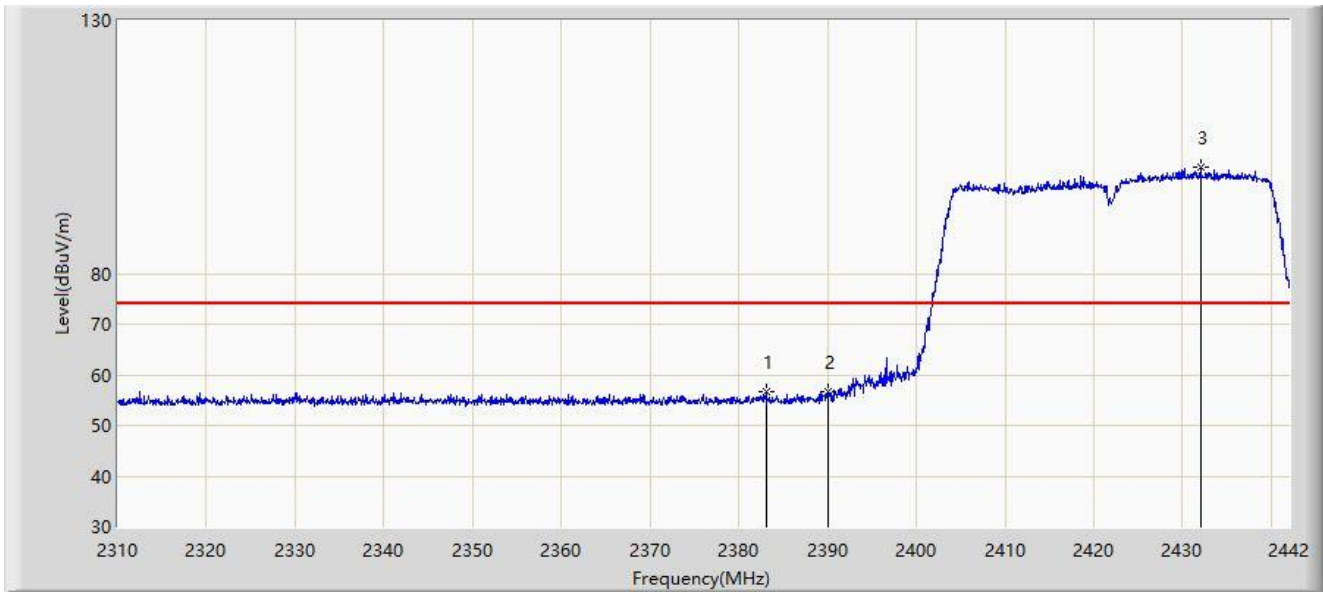


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2383.062	56.586	25.667	-17.414	74.000	30.919	PK
2			2390.000	56.562	25.645	-17.438	74.000	30.917	PK
3		*	2432.034	100.973	70.049	N/A	N/A	30.925	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2422MHz, Ant 1	

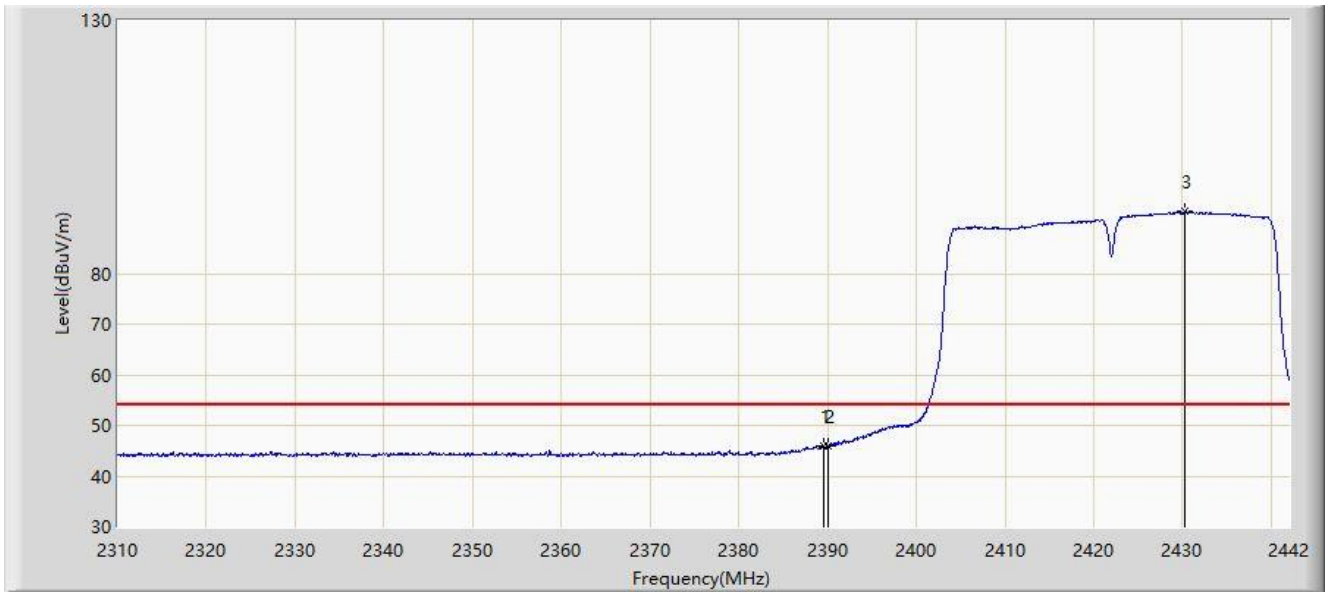


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.596	45.923	15.006	-8.077	54.000	30.917	AV
2			2390.000	45.858	14.941	-8.142	54.000	30.917	AV
3		*	2430.318	92.185	61.257	N/A	N/A	30.929	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2422MHz, Ant 1	

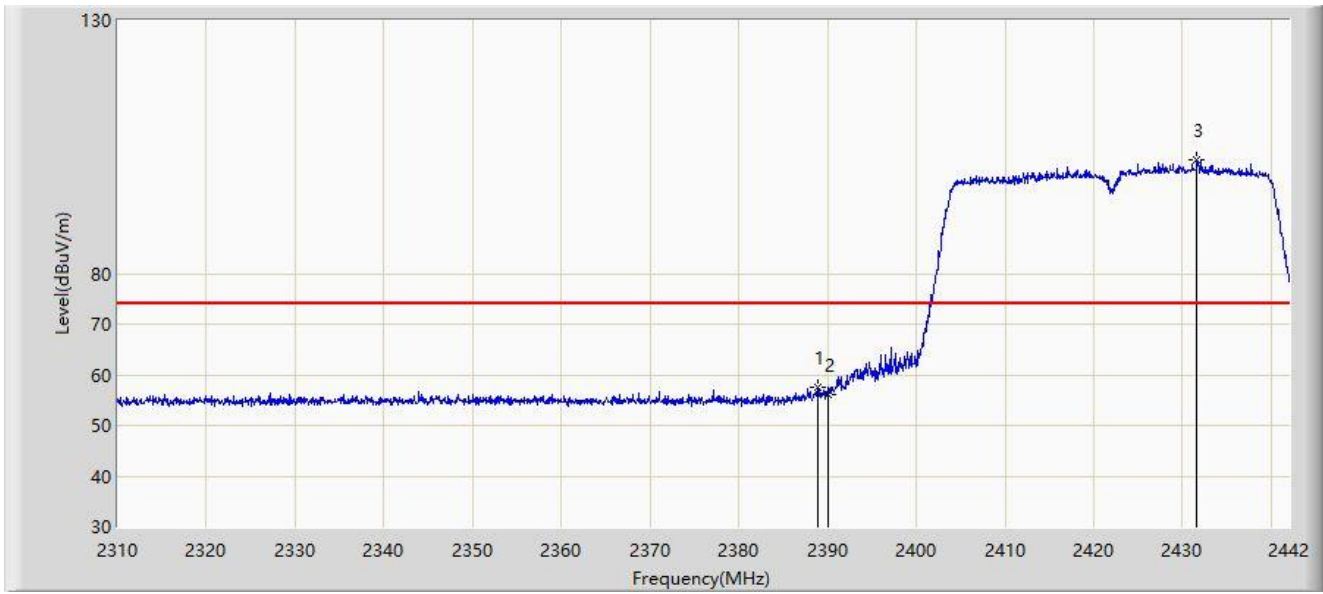


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.870	57.485	26.568	-16.515	74.000	30.917	PK
2			2390.000	56.022	25.105	-17.978	74.000	30.917	PK
3		*	2431.638	102.460	71.535	N/A	N/A	30.925	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2422MHz, Ant 1	

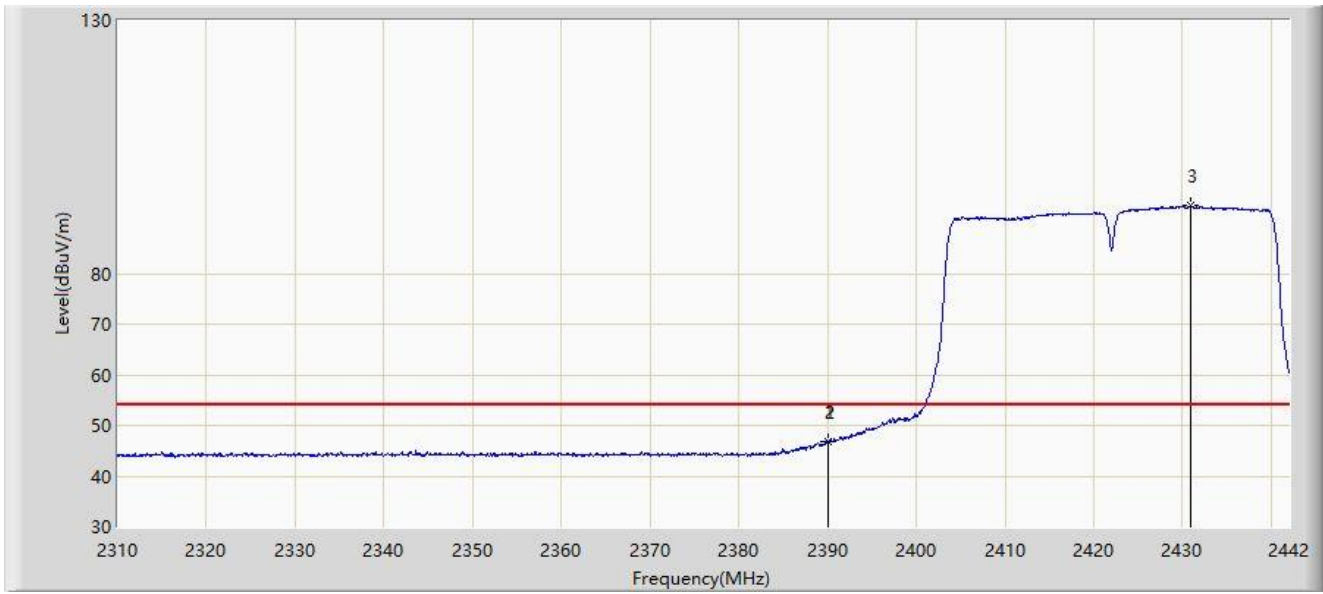


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.992	46.808	15.891	-7.192	54.000	30.917	AV
2			2390.000	46.798	15.881	-7.202	54.000	30.917	AV
3		*	2430.846	93.437	62.510	N/A	N/A	30.927	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/05
Limit: FCC_2.4G_RE(3m)	Engineer: Ryan Cai
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz, Ant 1	

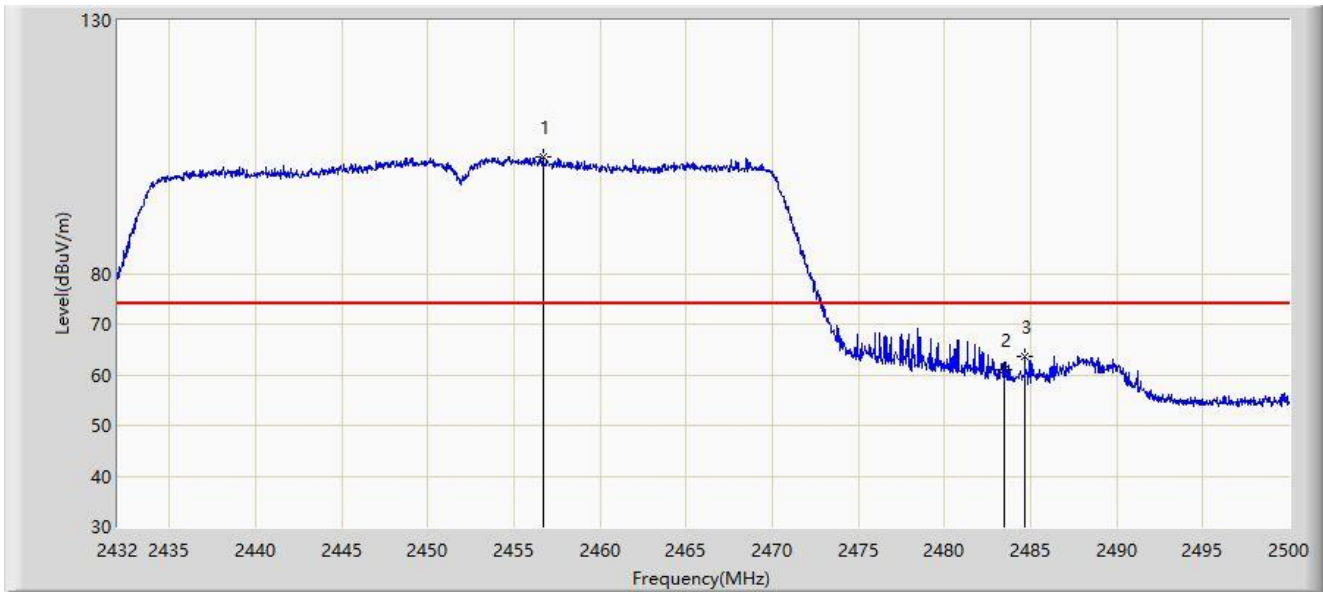


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2456.684	103.087	72.201	N/A	N/A	30.887	PK
2			2483.500	60.978	30.104	-13.022	74.000	30.874	PK
3			2484.666	63.698	32.819	-10.302	74.000	30.880	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/05
Limit: FCC_2.4G_RE(3m)	Engineer: Ryan Cai
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz, Ant 1	

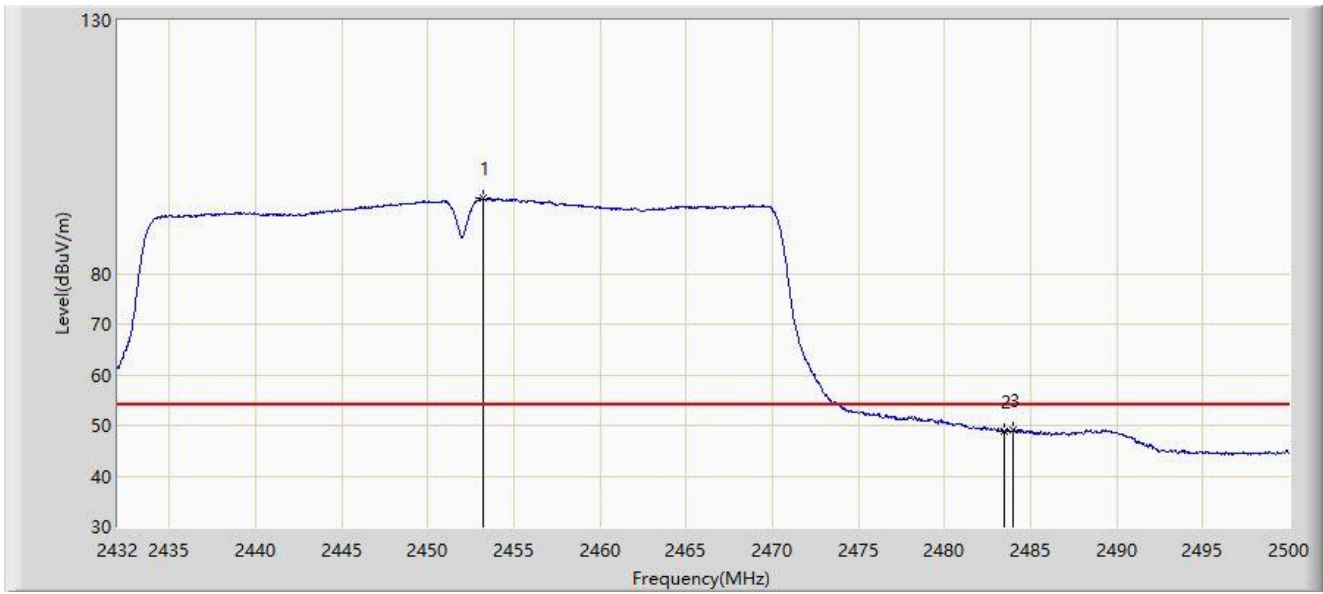


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2453.182	94.905	64.016	N/A	N/A	30.889	AV
2			2483.500	48.981	18.107	-5.019	54.000	30.874	AV
3			2483.986	49.123	18.247	-4.877	54.000	30.876	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/05
Limit: FCC_2.4G_RE(3m)	Engineer: Ryan Cai
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz, Ant 1	

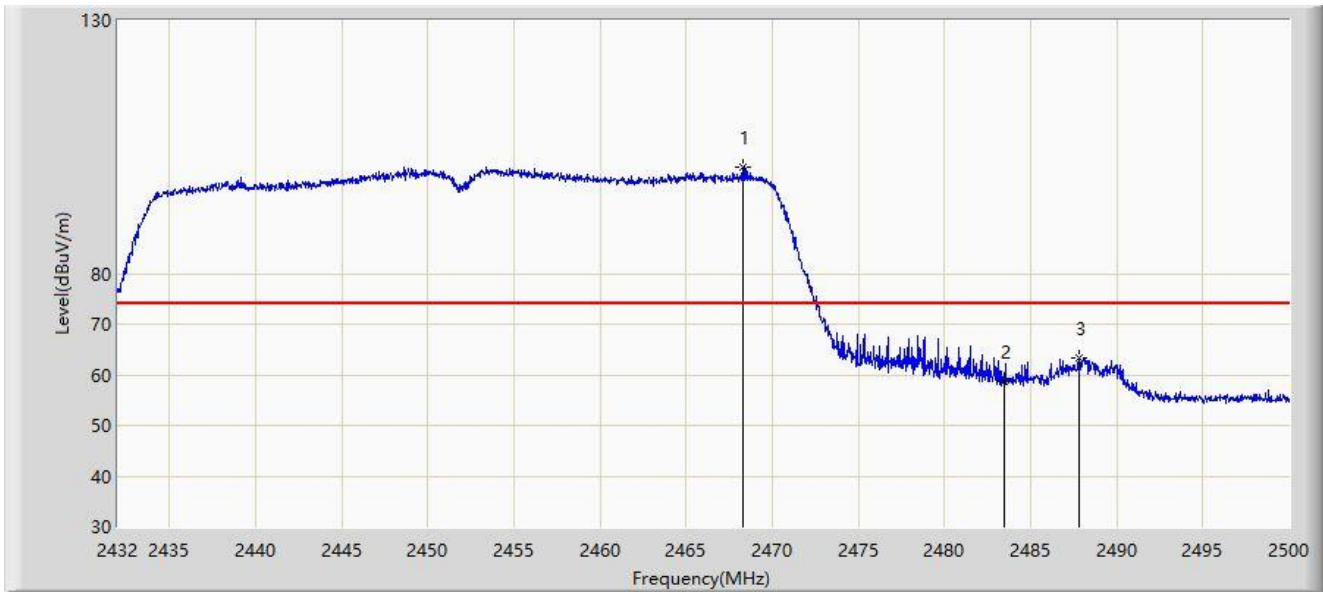


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2468.278	101.024	70.152	N/A	N/A	30.872	PK
2			2483.500	58.781	27.907	-15.219	74.000	30.874	PK
3			2487.794	63.317	32.423	-10.683	74.000	30.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/05
Limit: FCC_2.4G_RE(3m)	Engineer: Ryan Cai
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz, Ant 1	

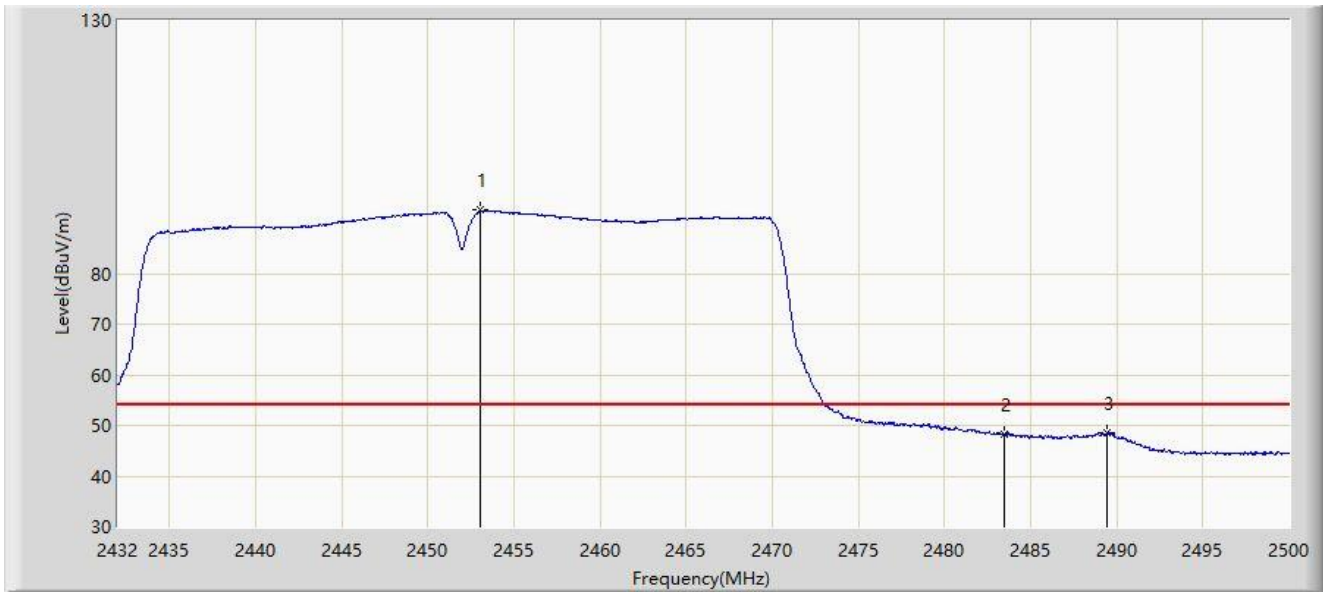


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2453.080	92.510	61.621	N/A	N/A	30.889	AV
2			2483.500	48.129	17.255	-5.871	54.000	30.874	AV
3			2489.460	48.667	17.766	-5.333	54.000	30.902	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz, Ant 1	

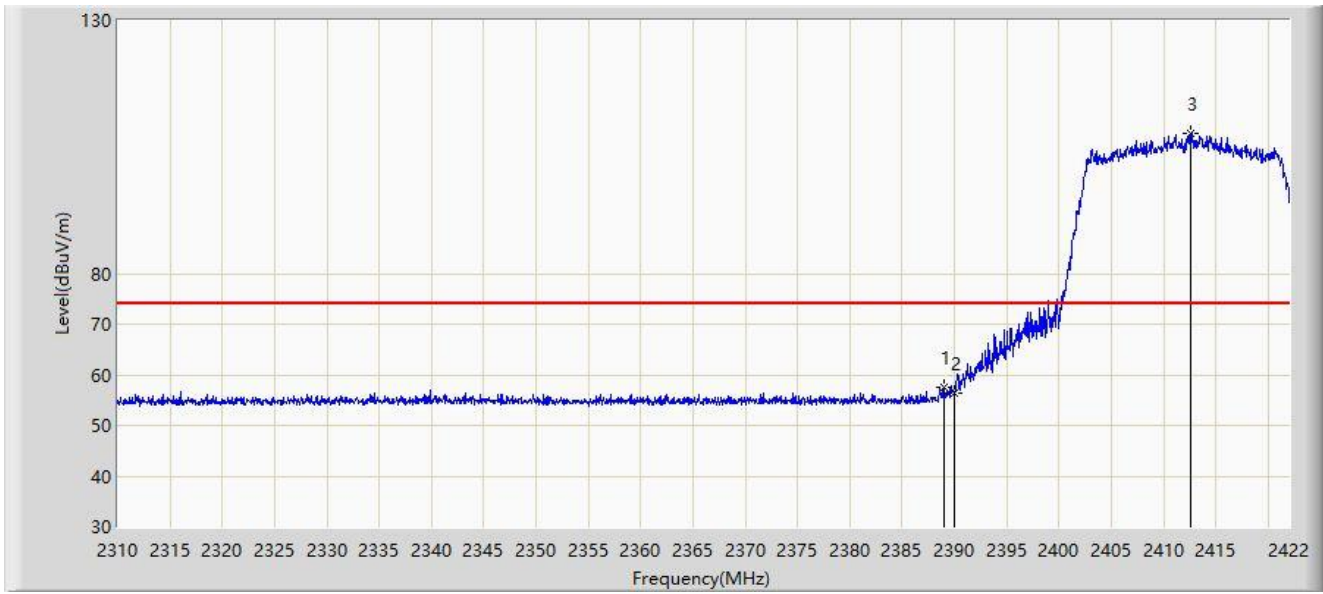


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.016	57.483	26.566	-16.517	74.000	30.917	PK
2			2390.000	56.386	25.469	-17.614	74.000	30.917	PK
3		*	2412.536	107.650	76.661	N/A	N/A	30.989	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz, Ant 1	

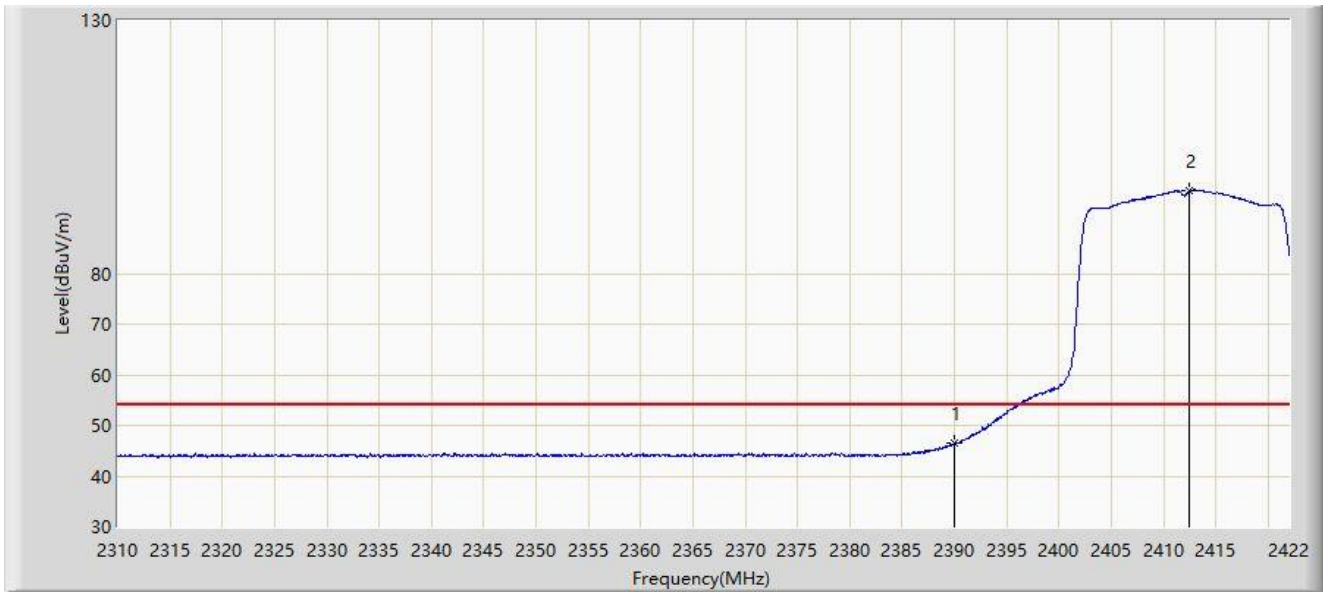


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	46.382	15.465	-7.618	54.000	30.917	AV
2		*	2412.480	96.354	65.365	N/A	N/A	30.989	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz, Ant 1	

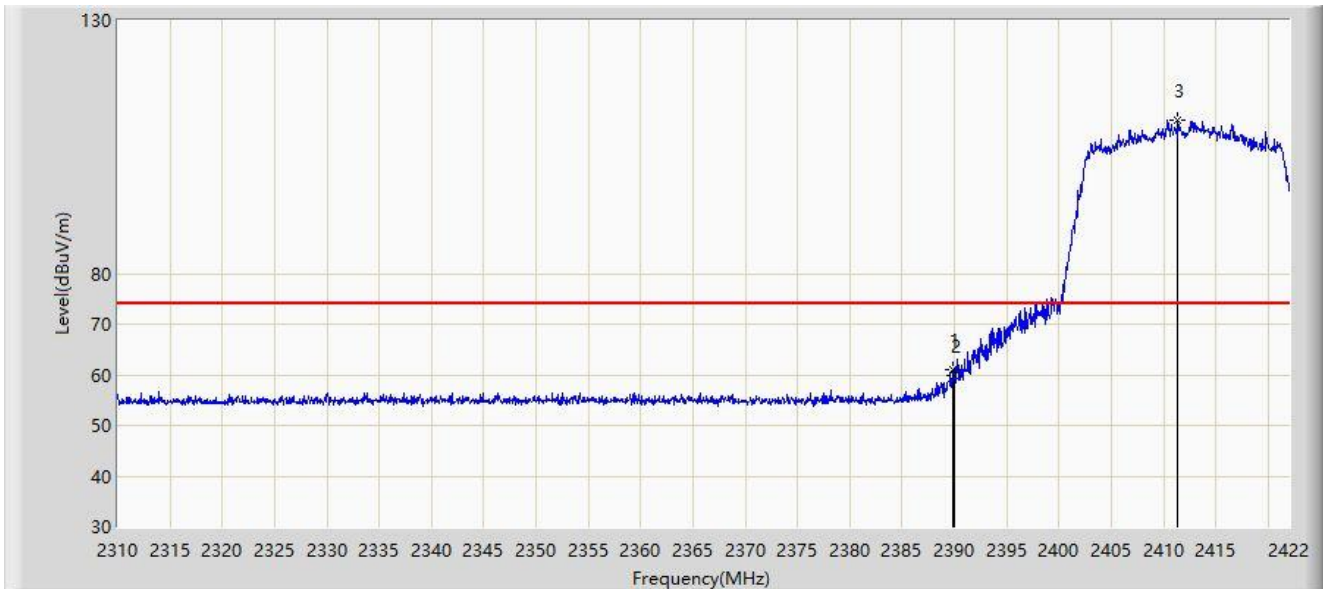


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.856	61.132	30.215	-12.868	74.000	30.917	PK
2			2390.000	59.947	29.030	-14.053	74.000	30.917	PK
3		*	2411.360	110.403	79.410	N/A	N/A	30.993	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz, Ant 1	

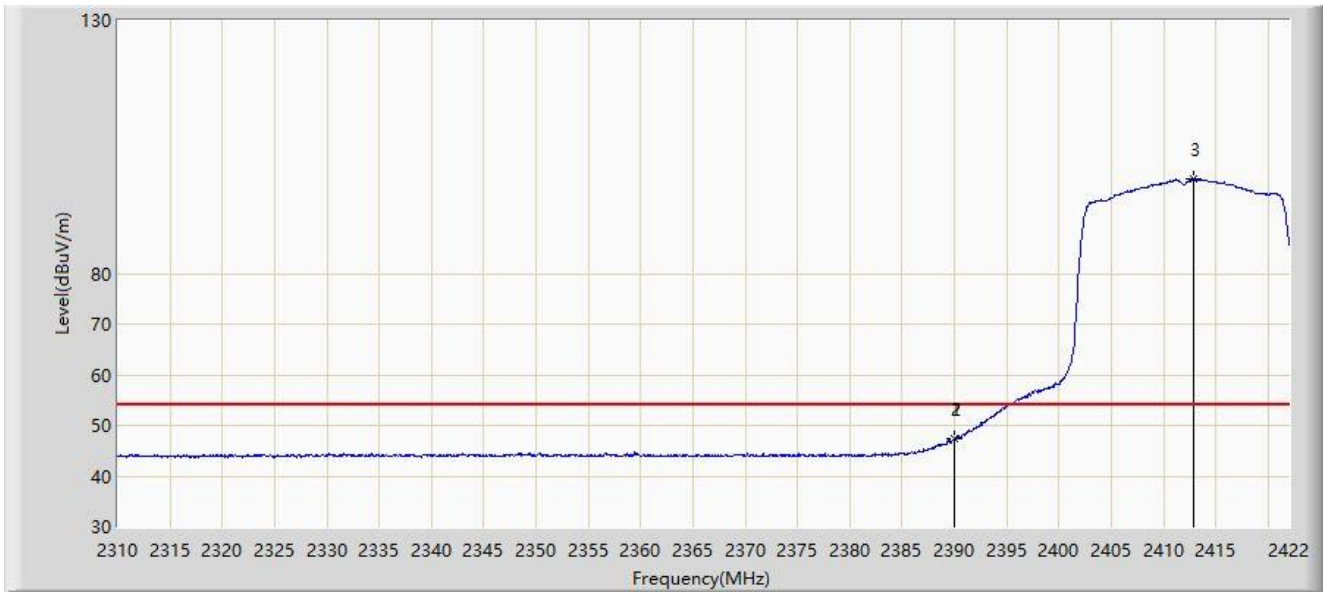


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.968	47.527	16.610	-6.473	54.000	30.917	AV
2			2390.000	47.513	16.596	-6.487	54.000	30.917	AV
3		*	2412.872	98.800	67.812	N/A	N/A	30.988	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz, Ant 1	

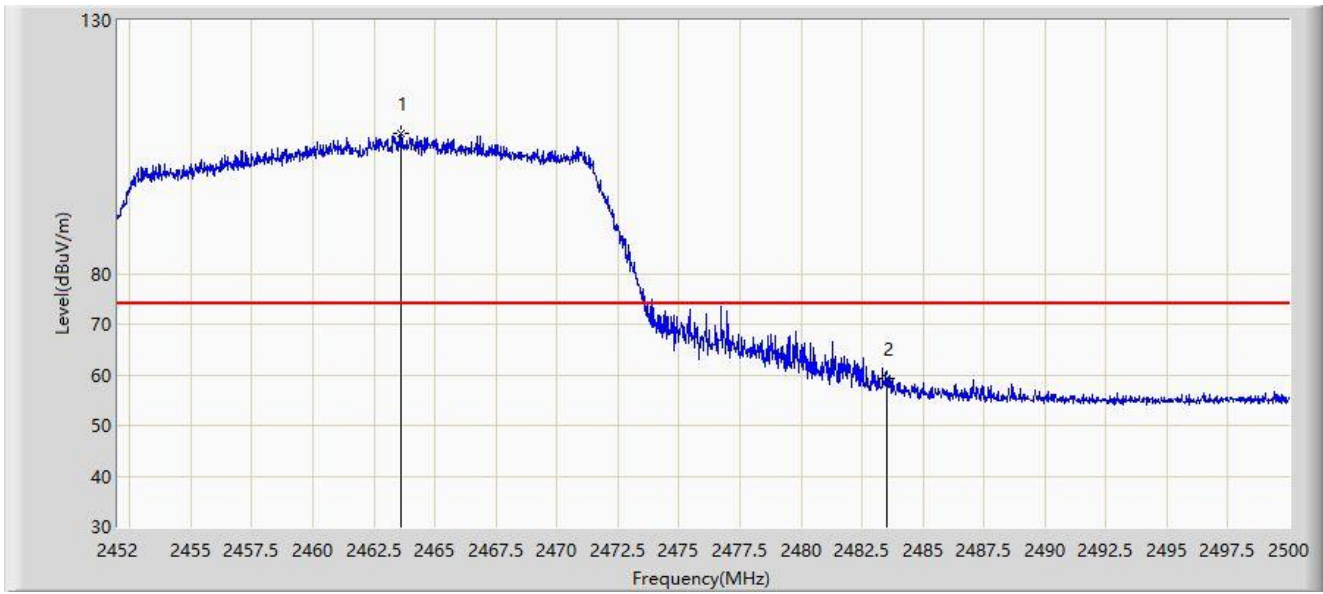


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2463.616	107.649	76.769	N/A	N/A	30.879	PK
2			2483.500	59.309	28.435	-14.691	74.000	30.874	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz, Ant 1	

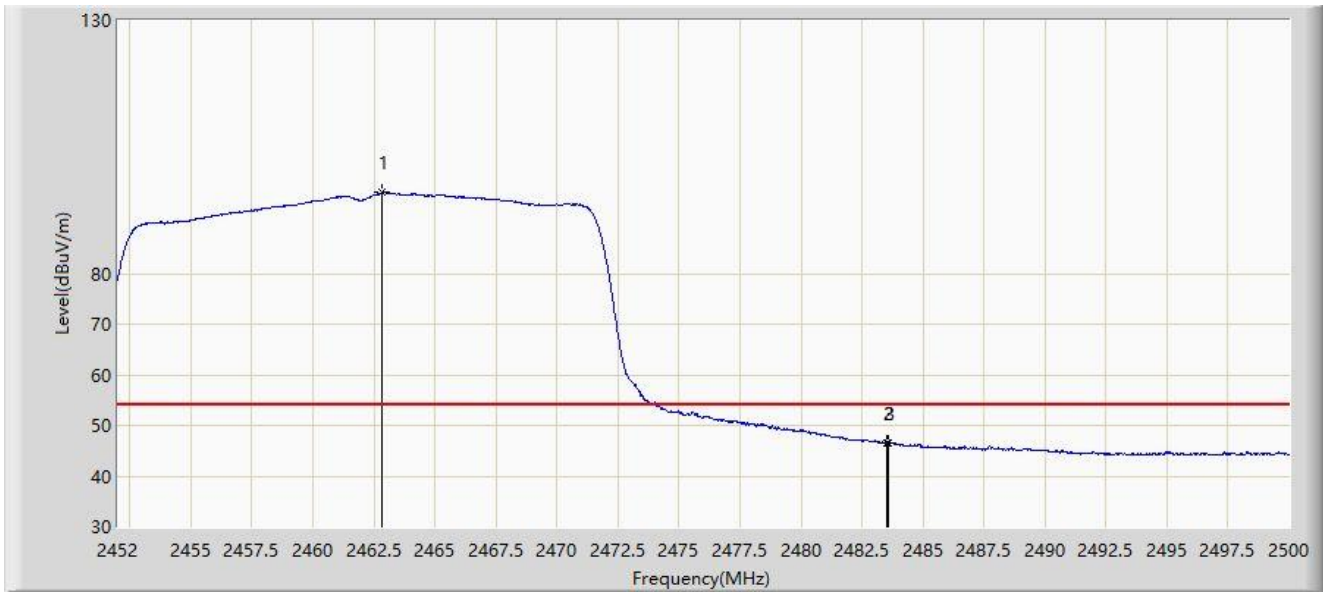


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.848	96.011	65.130	N/A	N/A	30.881	AV
2			2483.500	46.498	15.624	-7.502	54.000	30.874	AV
3			2483.560	46.613	15.739	-7.387	54.000	30.874	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz, Ant 1	

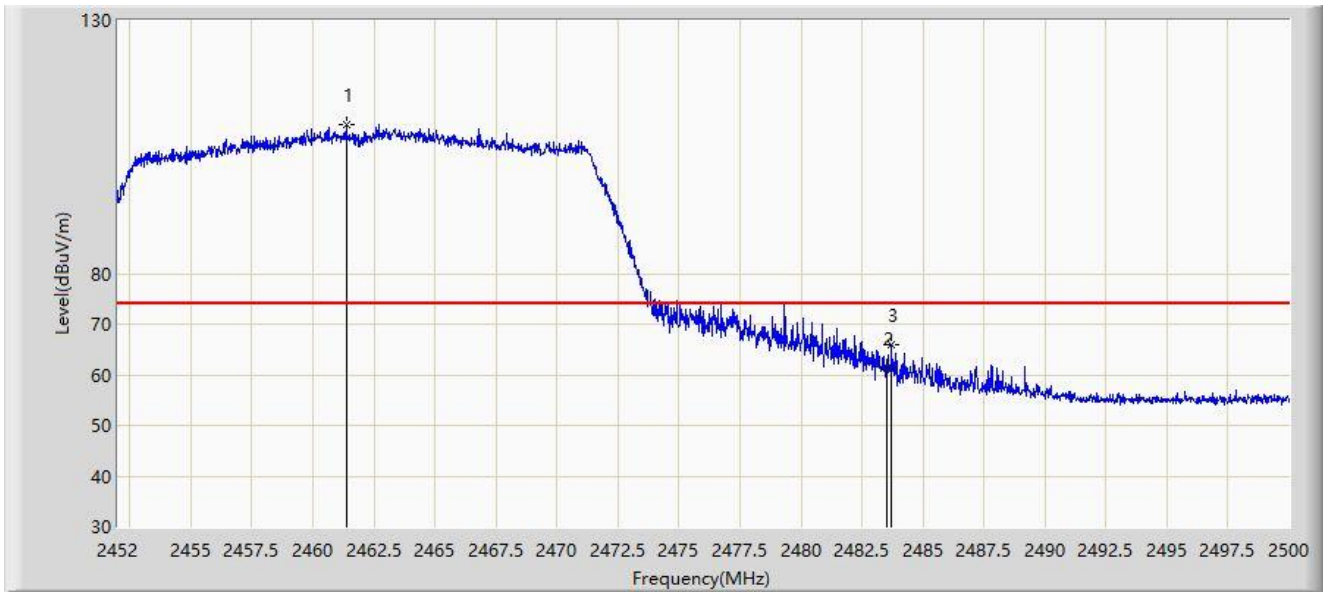


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2461.360	109.402	78.519	N/A	N/A	30.883	PK
2			2483.500	61.303	30.429	-12.697	74.000	30.874	PK
3			2483.728	65.832	34.957	-8.168	74.000	30.875	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz, Ant 1	

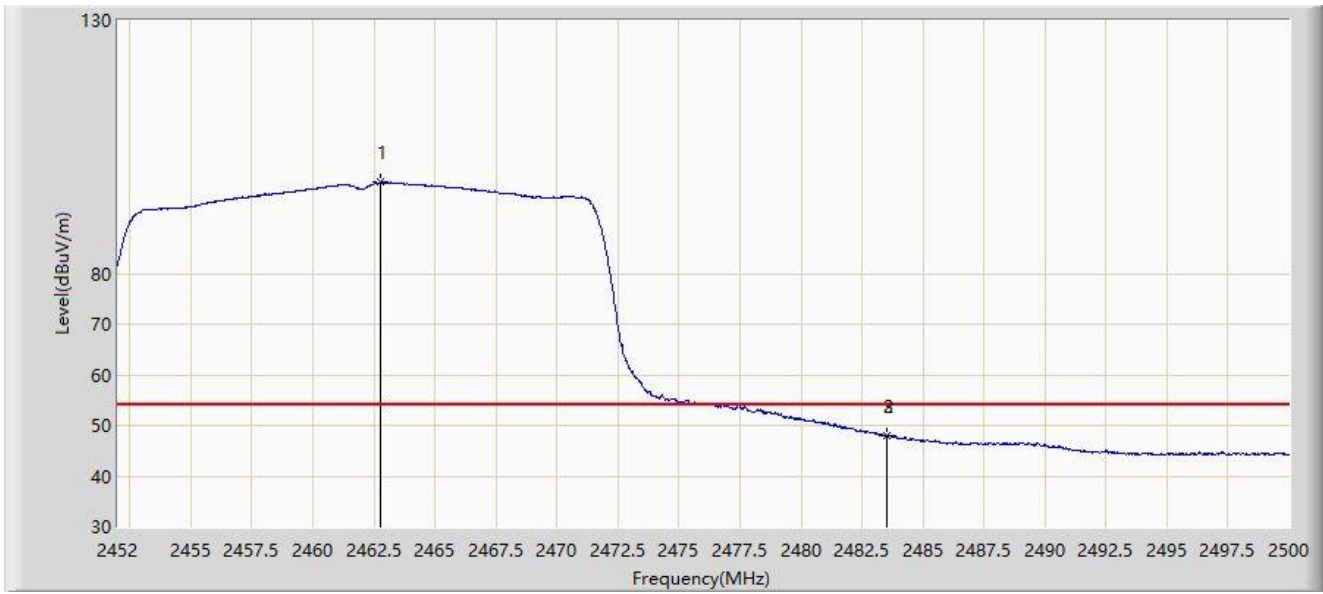


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.752	98.034	67.153	N/A	N/A	30.881	AV
2			2483.500	48.040	17.166	-5.960	54.000	30.874	AV
3			2483.512	48.091	17.217	-5.909	54.000	30.874	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz, Ant 1	

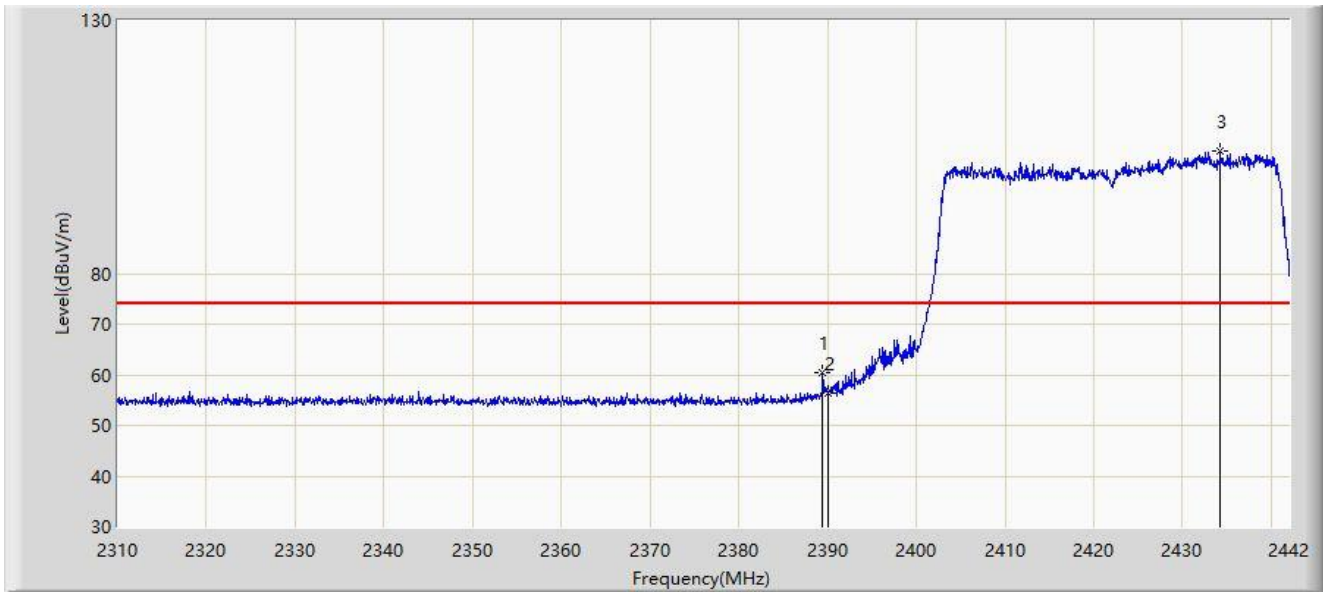


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.464	60.525	29.608	-13.475	74.000	30.917	PK
2			2390.000	56.236	25.319	-17.764	74.000	30.917	PK
3		*	2434.278	104.332	73.413	N/A	N/A	30.920	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz, Ant 1	

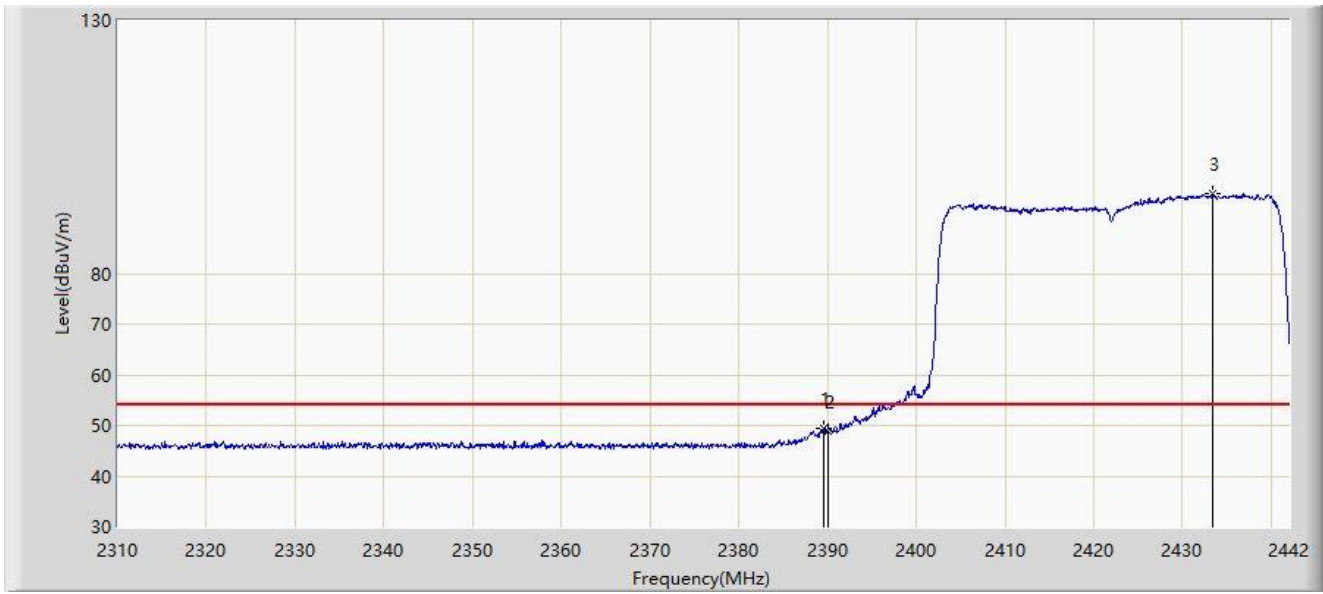


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.530	49.286	18.369	-4.714	54.000	30.917	AV
2			2390.000	48.784	17.867	-5.216	54.000	30.917	AV
3		*	2433.420	95.723	64.802	N/A	N/A	30.922	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz, Ant 1	

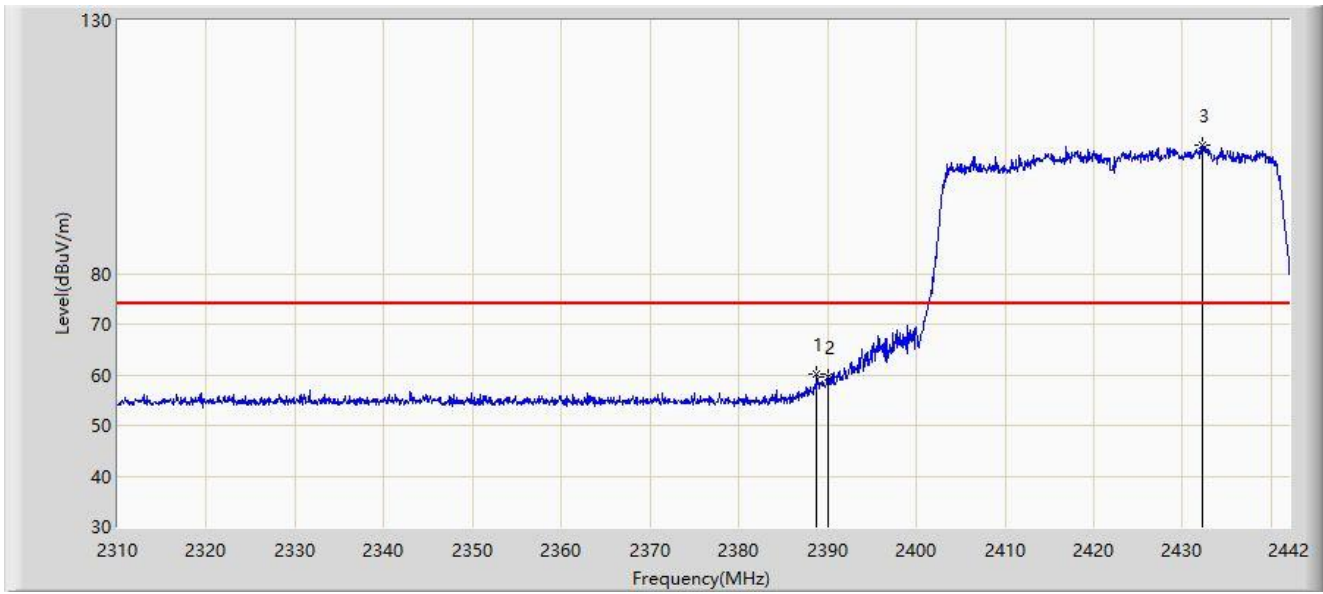


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.738	60.019	29.102	-13.981	74.000	30.918	PK
2			2390.000	59.648	28.731	-14.352	74.000	30.917	PK
3		*	2432.298	105.274	74.350	N/A	N/A	30.924	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz, Ant 1	

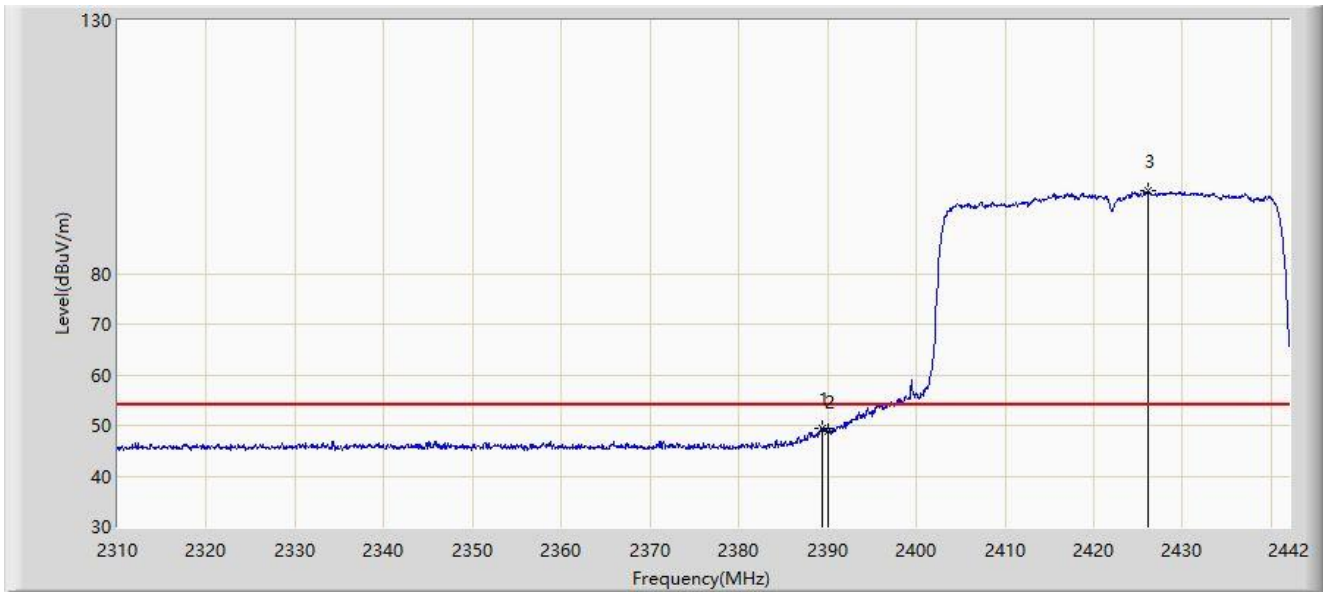


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.332	49.528	18.611	-4.472	54.000	30.917	AV
2			2390.000	48.780	17.863	-5.220	54.000	30.917	AV
3		*	2426.094	96.460	65.520	N/A	N/A	30.941	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz, Ant 1	

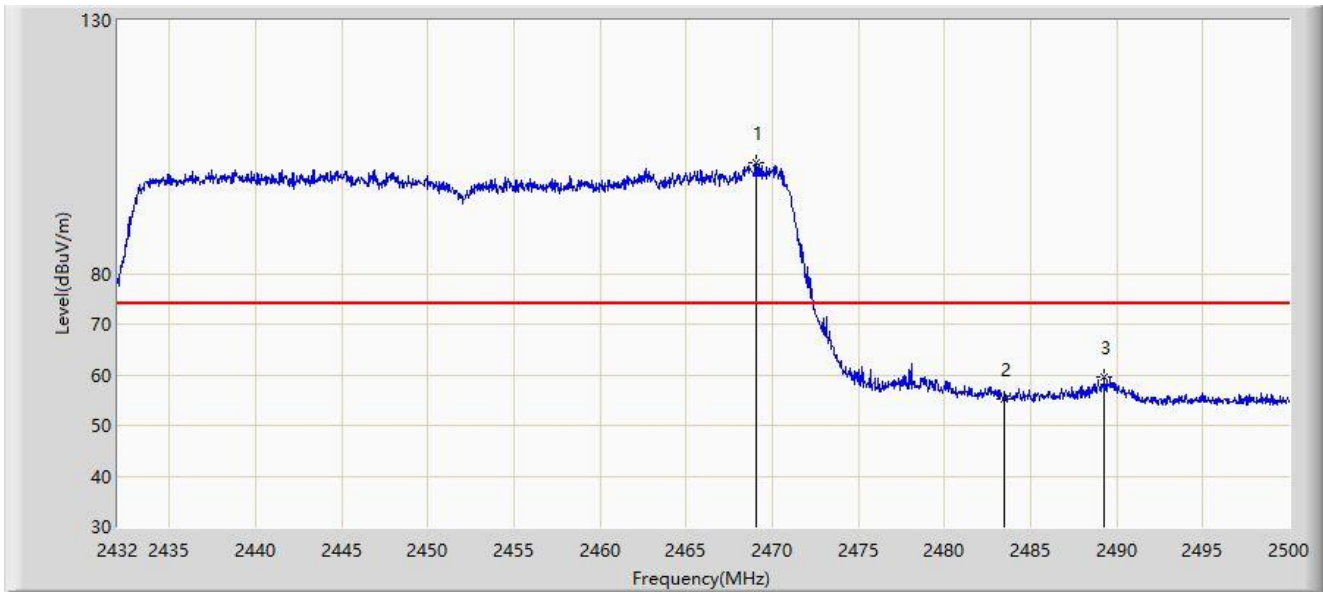


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2469.060	101.954	71.084	N/A	N/A	30.870	PK
2			2483.500	55.352	24.478	-18.648	74.000	30.874	PK
3			2489.290	59.495	28.594	-14.505	74.000	30.901	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz, Ant 1	

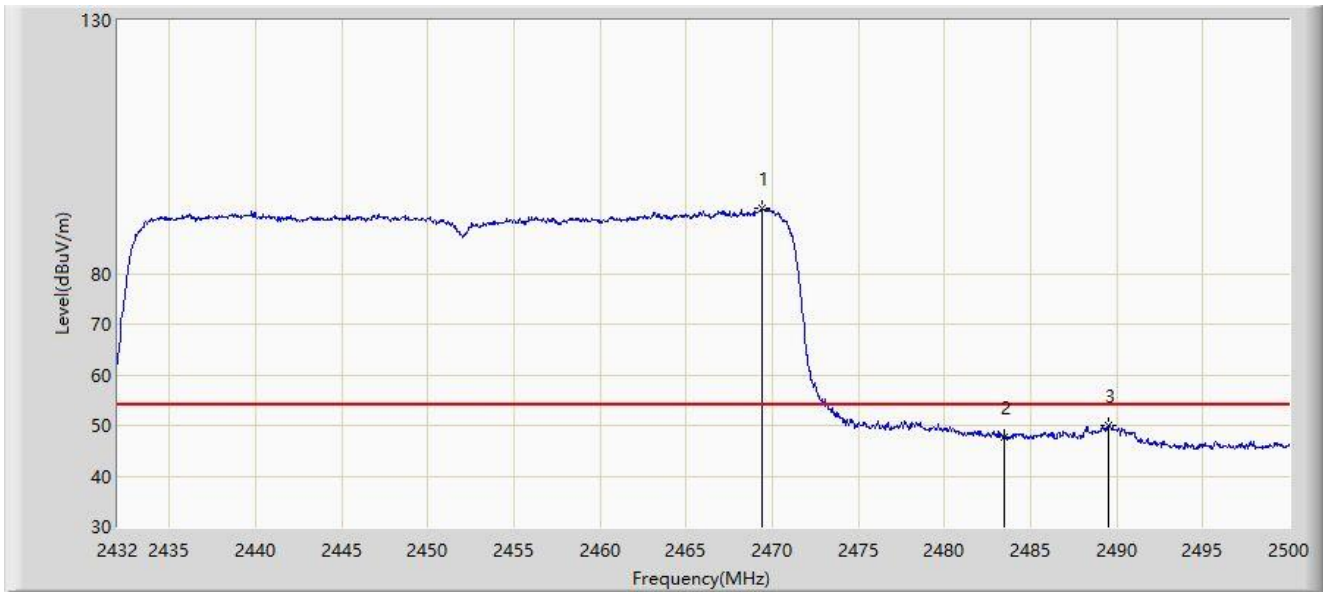


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2469.400	92.758	61.888	N/A	N/A	30.870	AV
2			2483.500	47.670	16.796	-6.330	54.000	30.874	AV
3			2489.528	50.107	19.205	-3.893	54.000	30.902	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz, Ant 1	

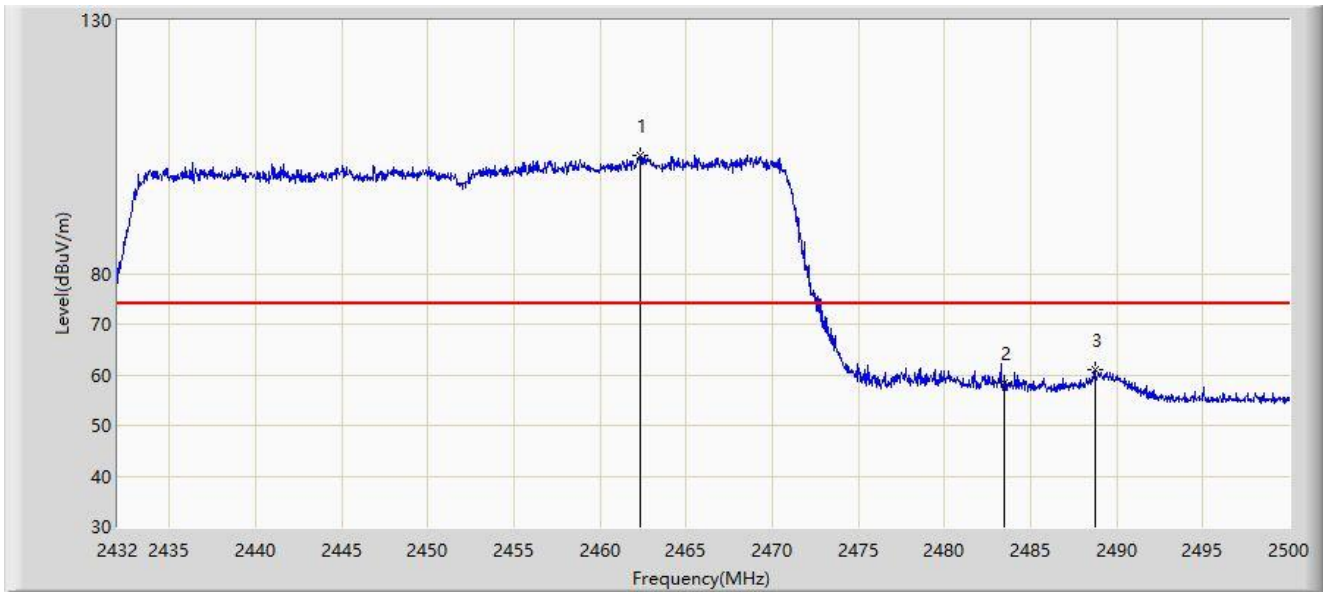


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.362	103.431	72.549	N/A	N/A	30.882	PK
2			2483.500	58.451	27.577	-15.549	74.000	30.874	PK
3			2488.712	61.102	30.204	-12.898	74.000	30.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz, Ant 1	

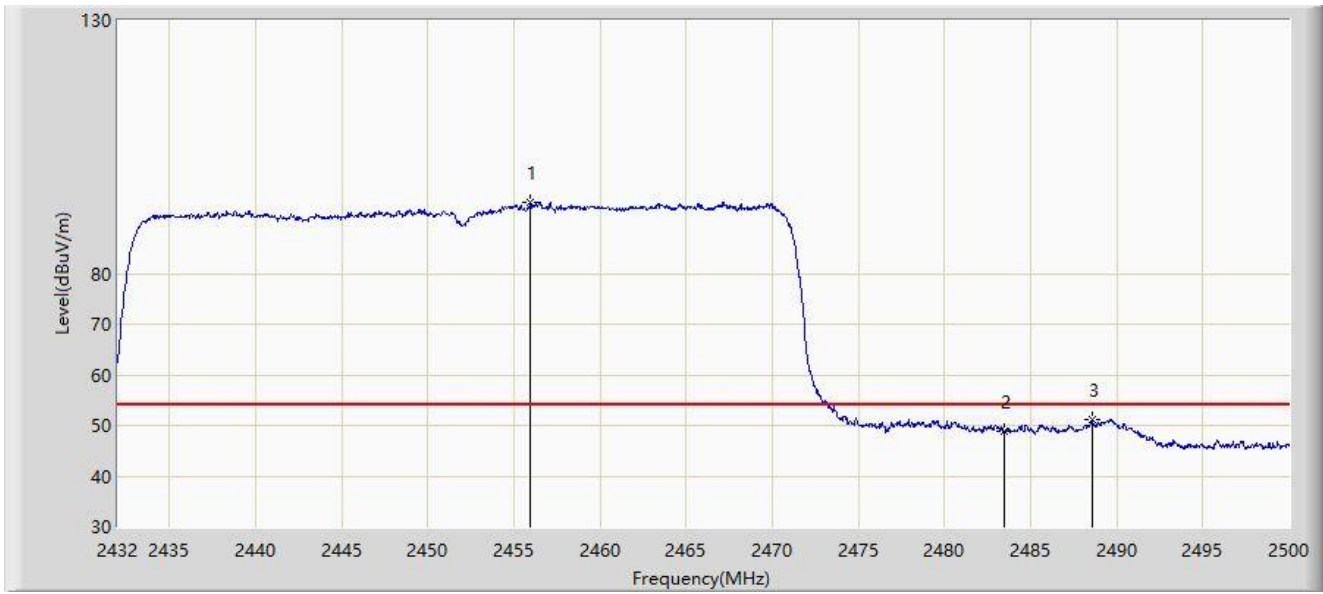


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2455.970	93.976	63.089	N/A	N/A	30.887	AV
2			2483.500	48.934	18.060	-5.066	54.000	30.874	AV
3			2488.542	51.018	20.121	-2.982	54.000	30.897	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:33
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 2	

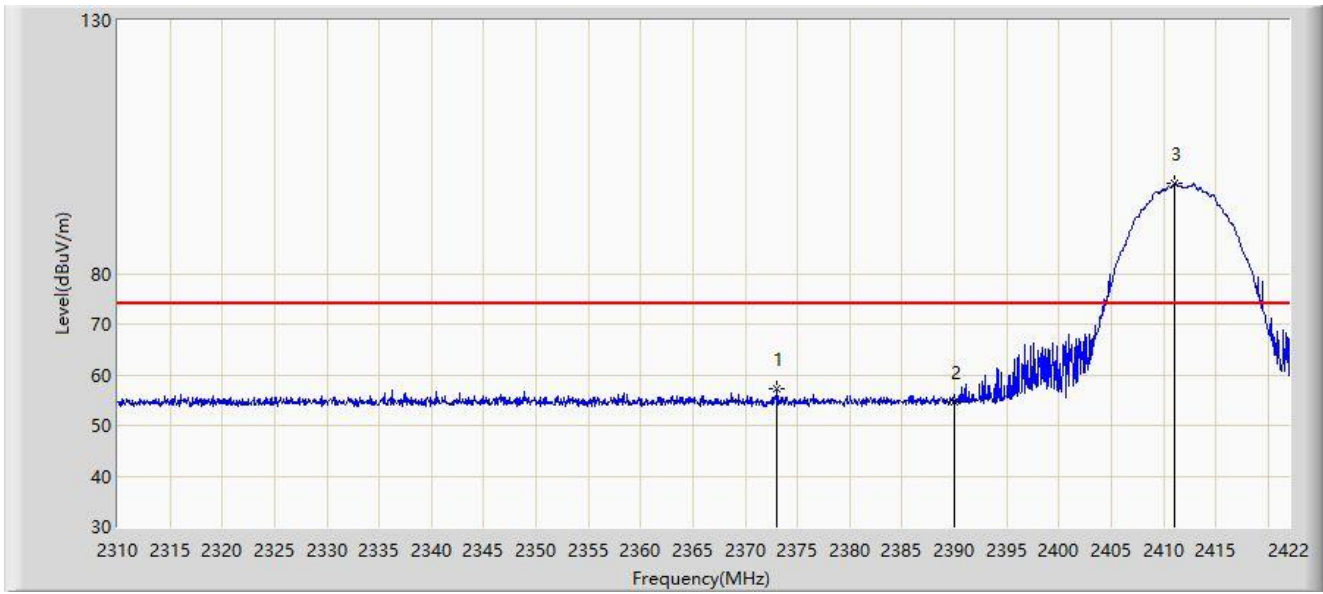


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2373.056	57.358	26.420	-16.642	74.000	30.938	PK
2		2390.000	54.688	23.771	-19.312	74.000	30.917	PK
3		2411.080	97.818	66.824	N/A	N/A	30.994	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:36
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 2	

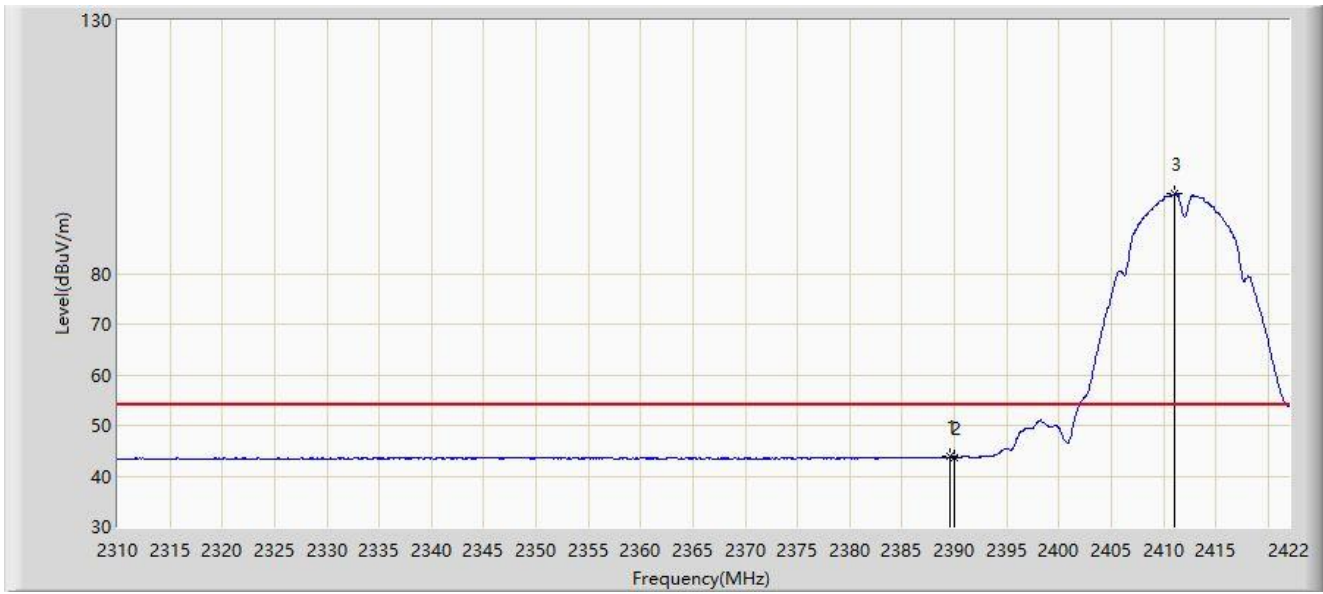


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.632	43.820	12.903	-10.180	54.000	30.918	AV
2		2390.000	43.745	12.828	-10.255	54.000	30.917	AV
3		2411.024	95.653	64.659	N/A	N/A	30.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:37
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 2	

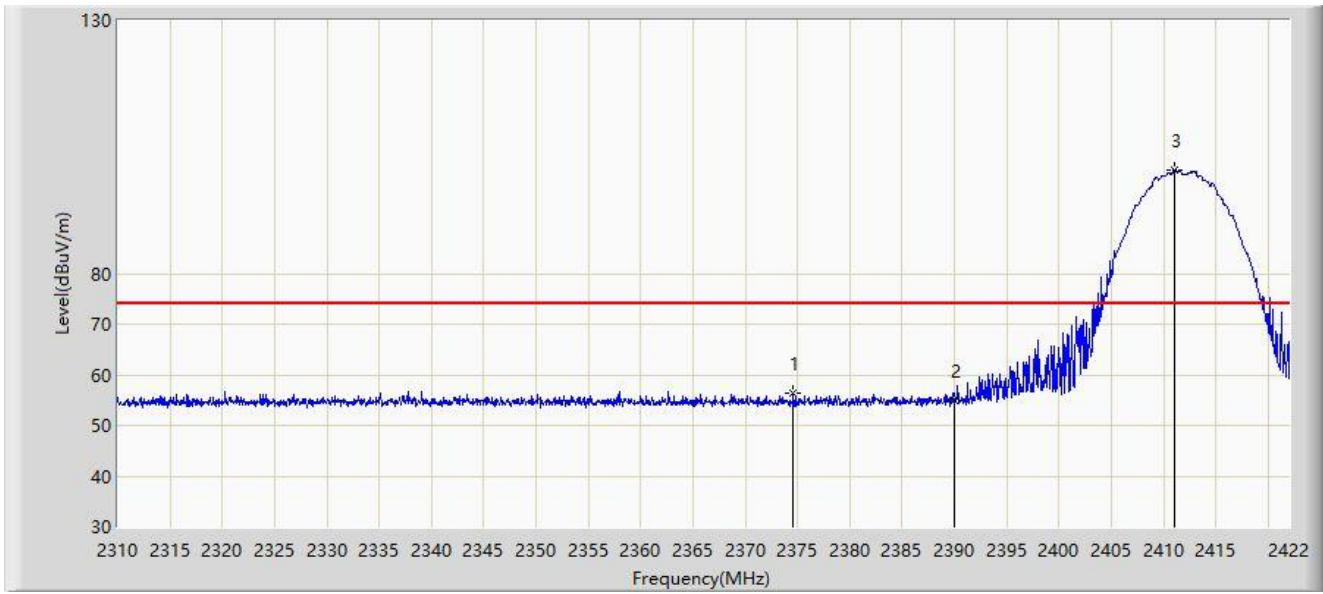


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2374.624	56.287	25.356	-17.713	74.000	30.931	PK
2		2390.000	54.791	23.874	-19.209	74.000	30.917	PK
3		2411.024	100.513	69.519	N/A	N/A	30.994	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:39
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2412MHz, Ant 2	

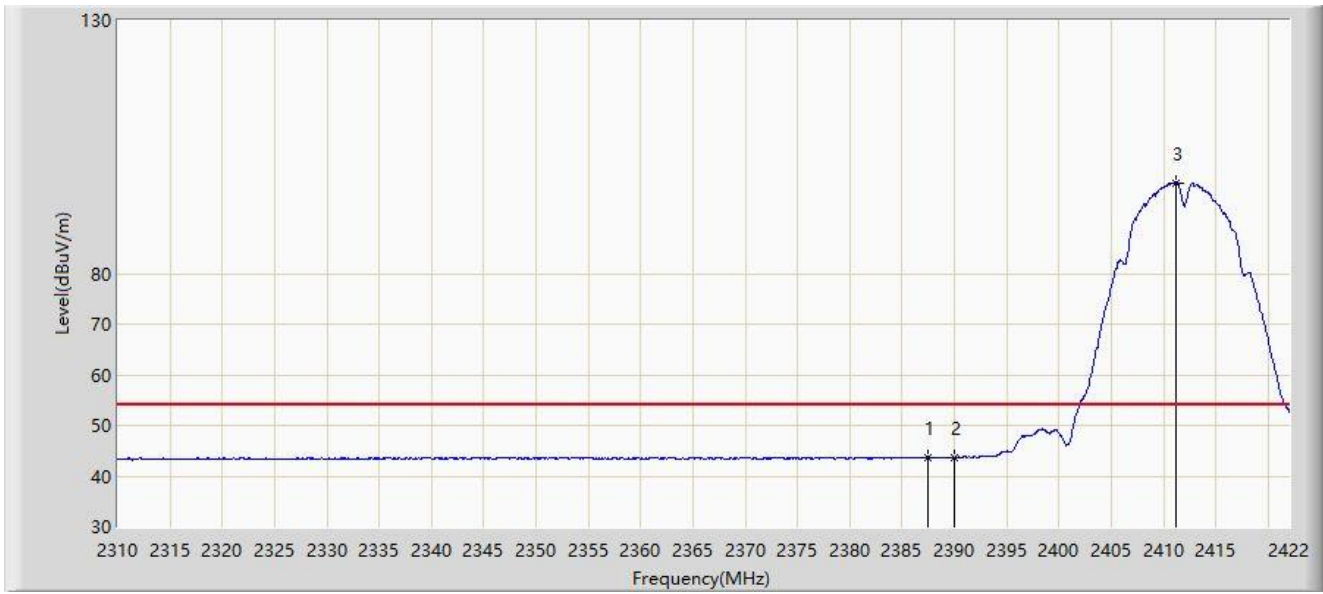


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.448	43.736	12.818	-10.264	54.000	30.918	AV
2		2390.000	43.710	12.793	-10.290	54.000	30.917	AV
3		2411.136	97.921	66.927	N/A	N/A	30.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:41
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 2	

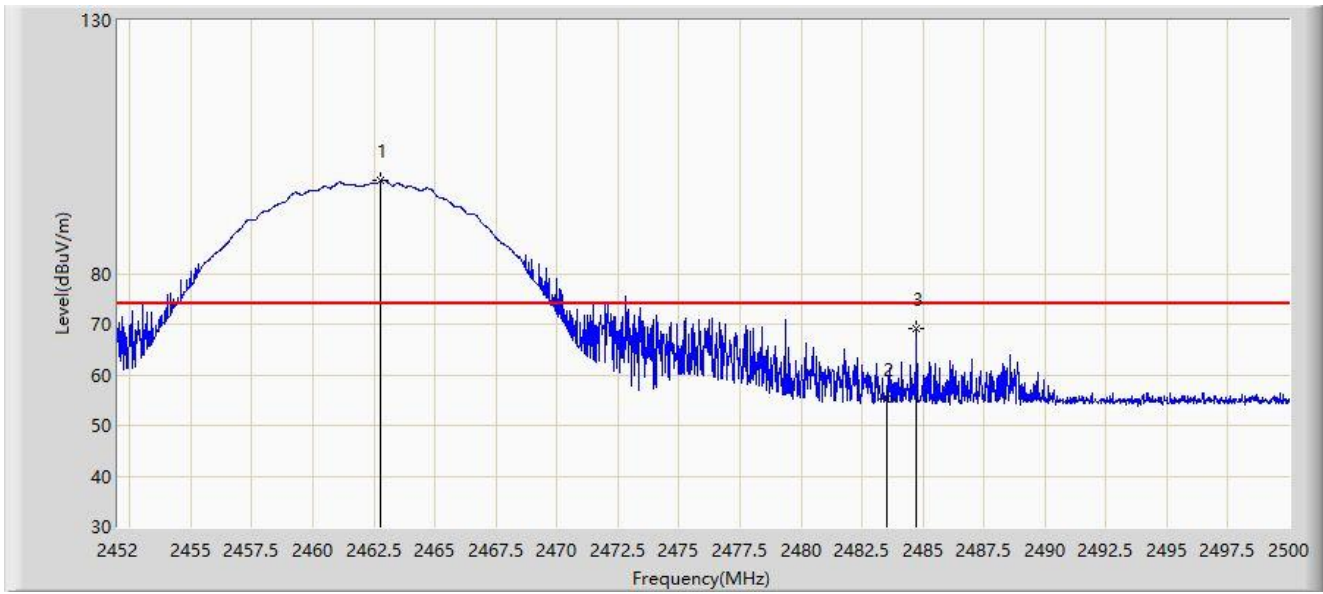


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.776	98.291	67.410	N/A	N/A	30.881	PK
2		2483.500	55.168	24.294	-18.832	74.000	30.874	PK
3	*	2484.736	69.073	38.193	-4.927	74.000	30.880	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:43
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 2	

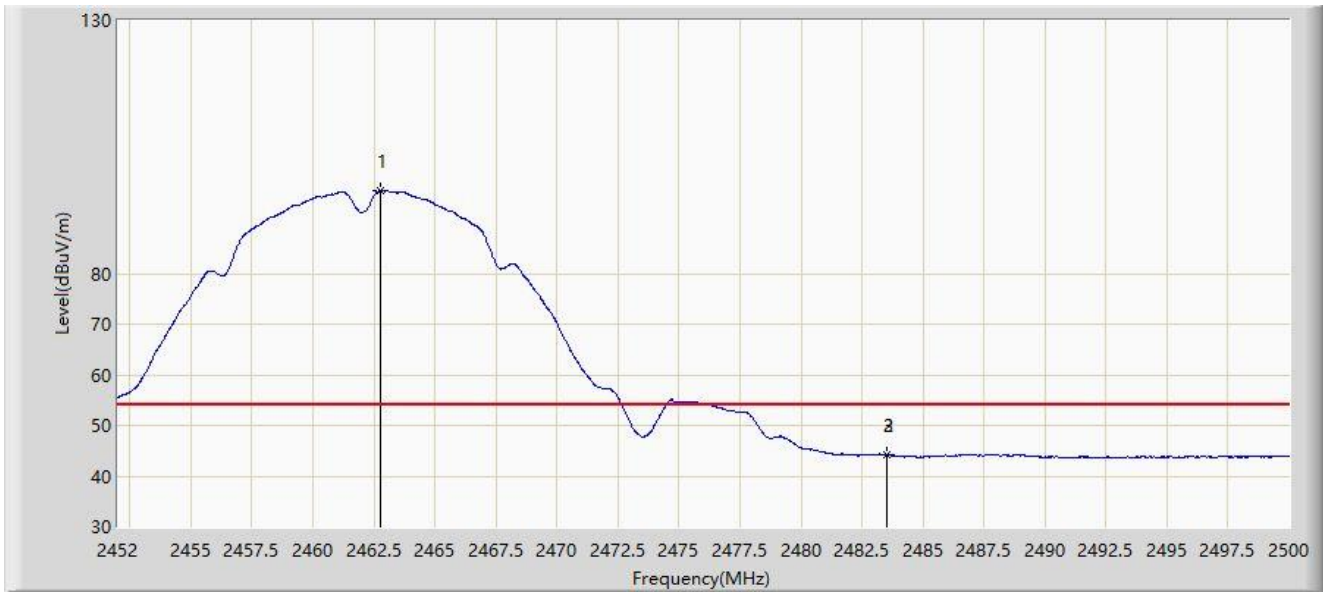


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.752	96.411	65.530	N/A	N/A	30.881	AV
2		2483.500	44.203	13.329	-9.797	54.000	30.874	AV
3	*	2483.512	44.204	13.330	-9.796	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:45
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 2	

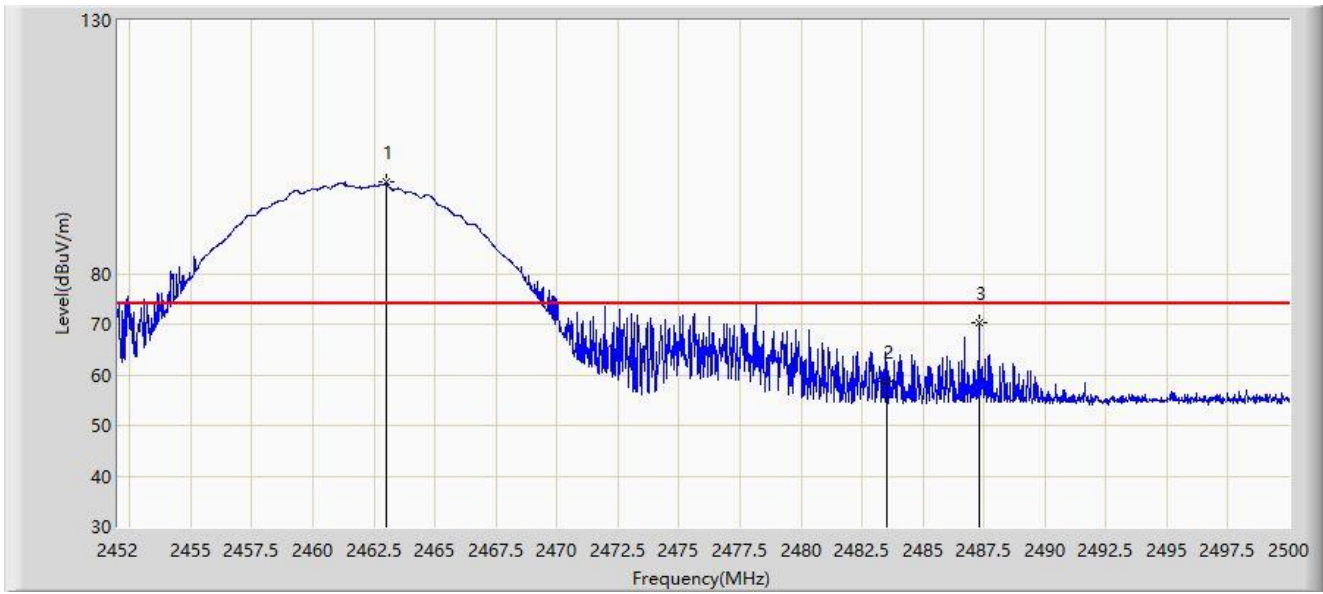

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.016	98.051	67.170	N/A	N/A	30.881	PK
2		2483.500	58.574	27.700	-15.426	74.000	30.874	PK
3	*	2487.280	70.341	39.450	-3.659	74.000	30.892	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:49
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz, Ant 2	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.096	95.831	64.948	N/A	N/A	30.883	AV
2	*	2483.500	44.298	13.424	-9.702	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 15:51
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 2	

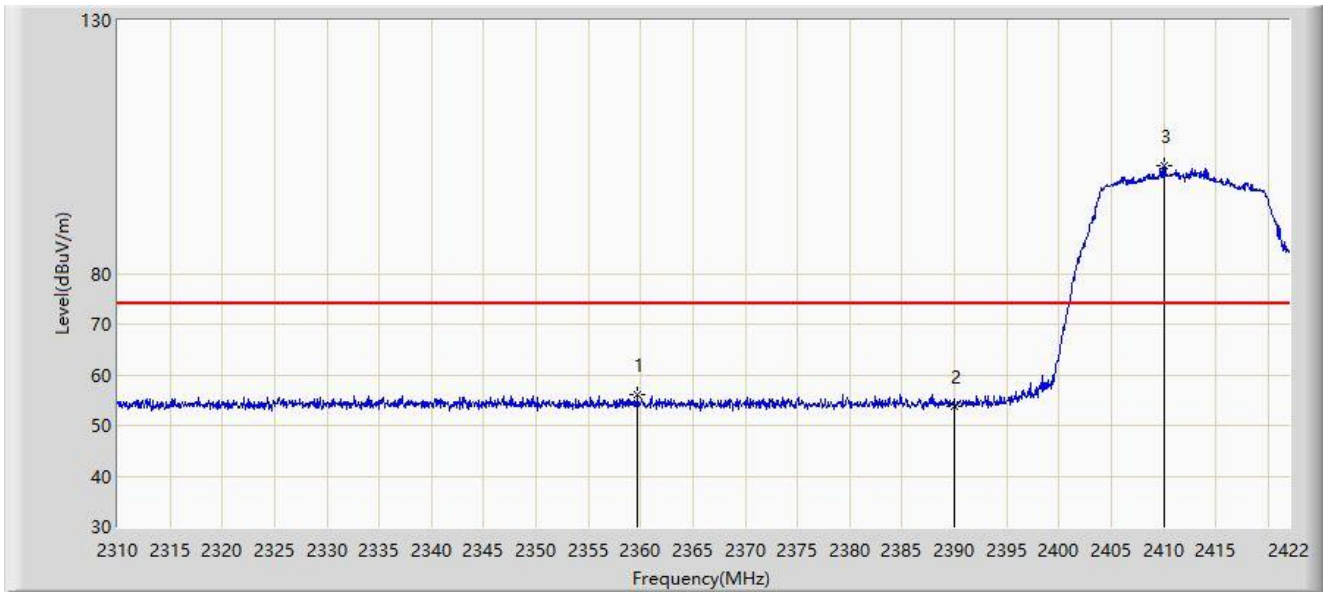


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2359.672	56.125	25.126	-17.875	74.000	30.999	PK
2		2390.000	53.739	22.822	-20.261	74.000	30.917	PK
3		2410.072	101.276	70.286	N/A	N/A	30.991	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:18
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 2	

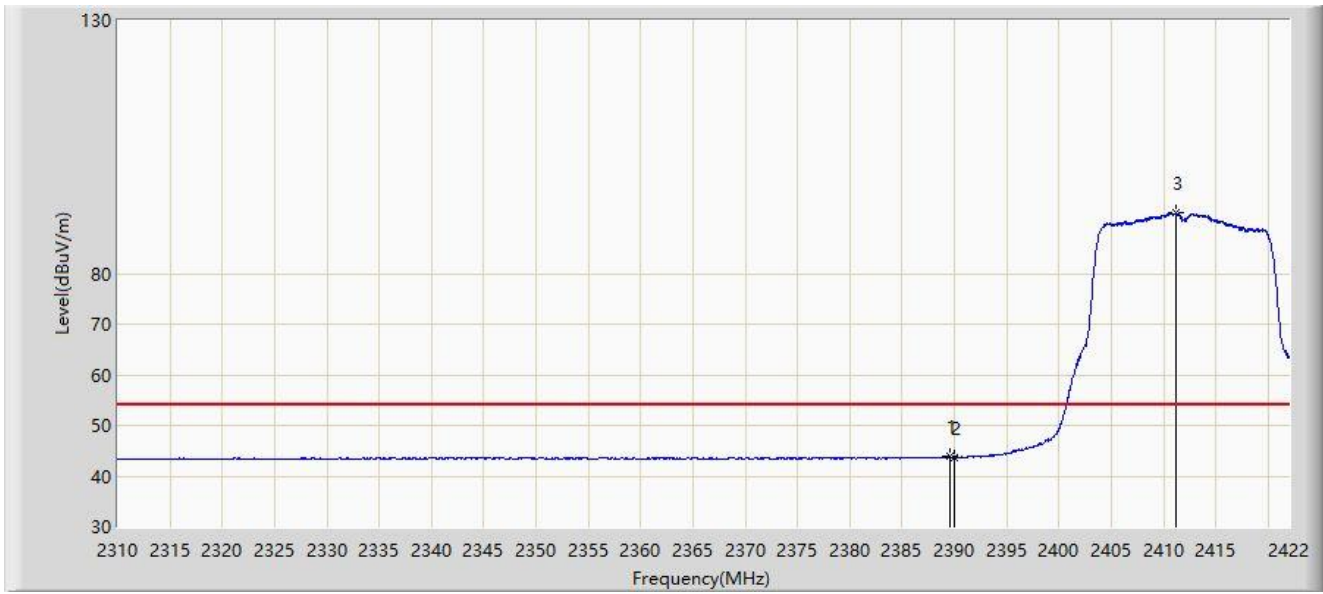


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	43.896	12.979	-10.104	54.000	30.917	AV
2		2390.000	43.726	12.809	-10.274	54.000	30.917	AV
3		2411.248	92.084	61.090	N/A	N/A	30.993	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:19
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 2	

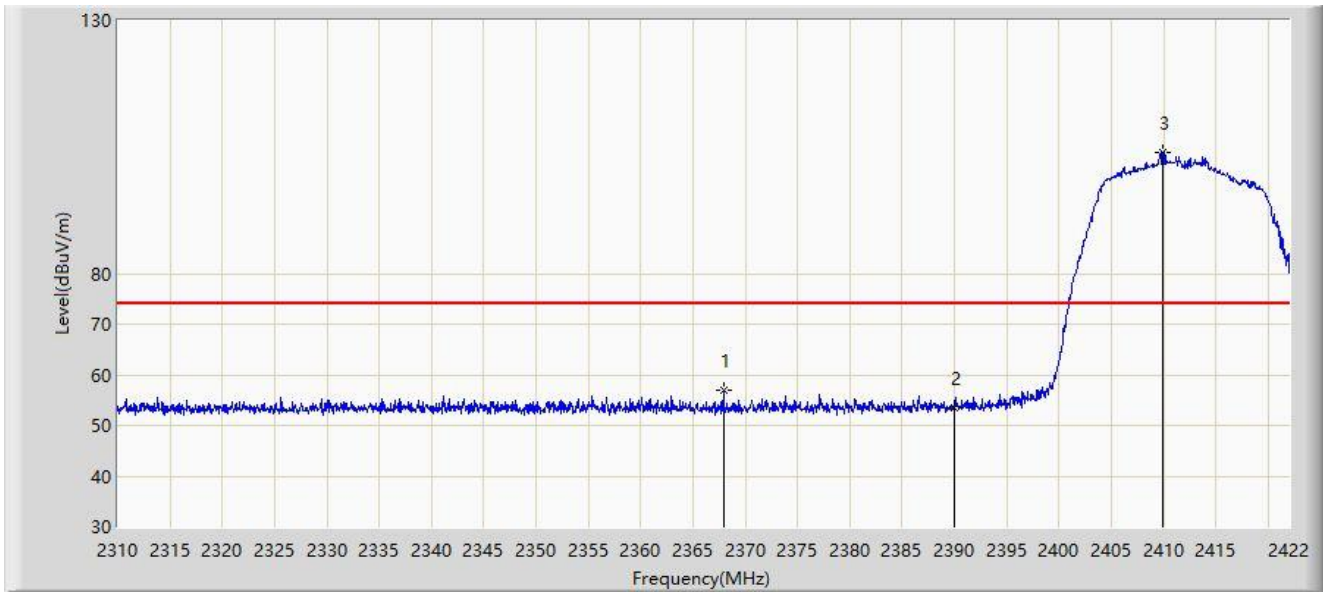


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2367.904	56.855	25.894	-17.145	74.000	30.961	PK
2		2390.000	53.613	22.696	-20.387	74.000	30.917	PK
3		2409.904	104.040	73.051	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:20
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz, Ant 2	

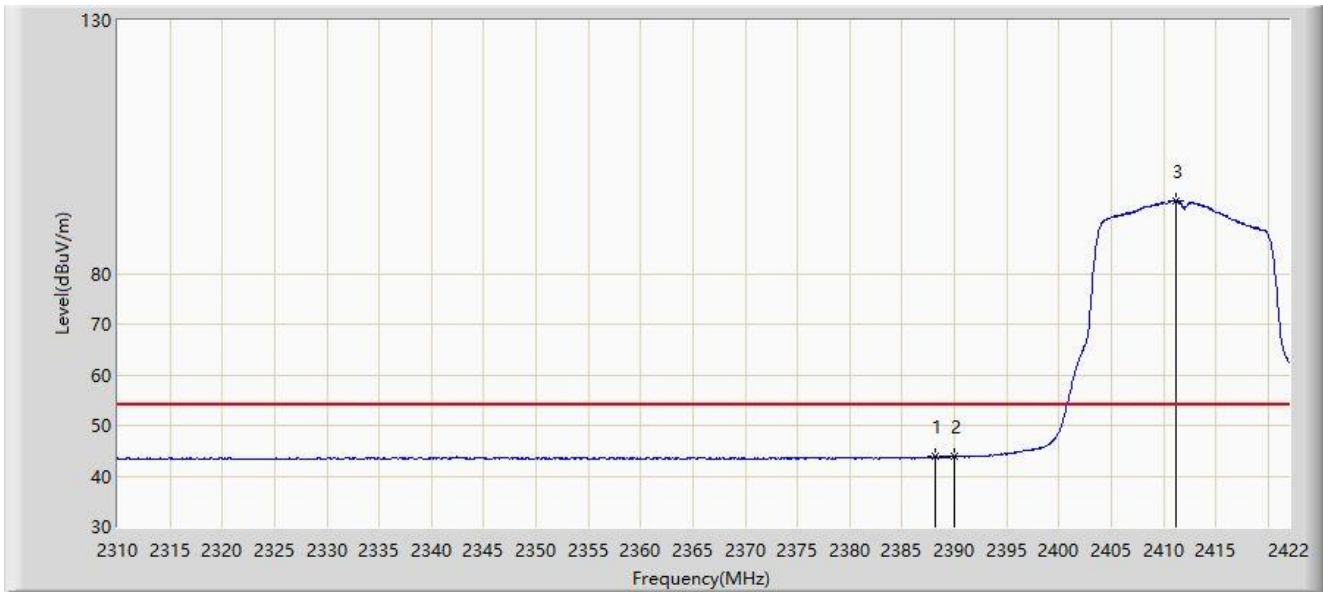


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.176	43.854	12.936	-10.146	54.000	30.917	AV
2		2390.000	43.851	12.934	-10.149	54.000	30.917	AV
3		2411.248	94.476	63.482	N/A	N/A	30.993	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:20
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 2	

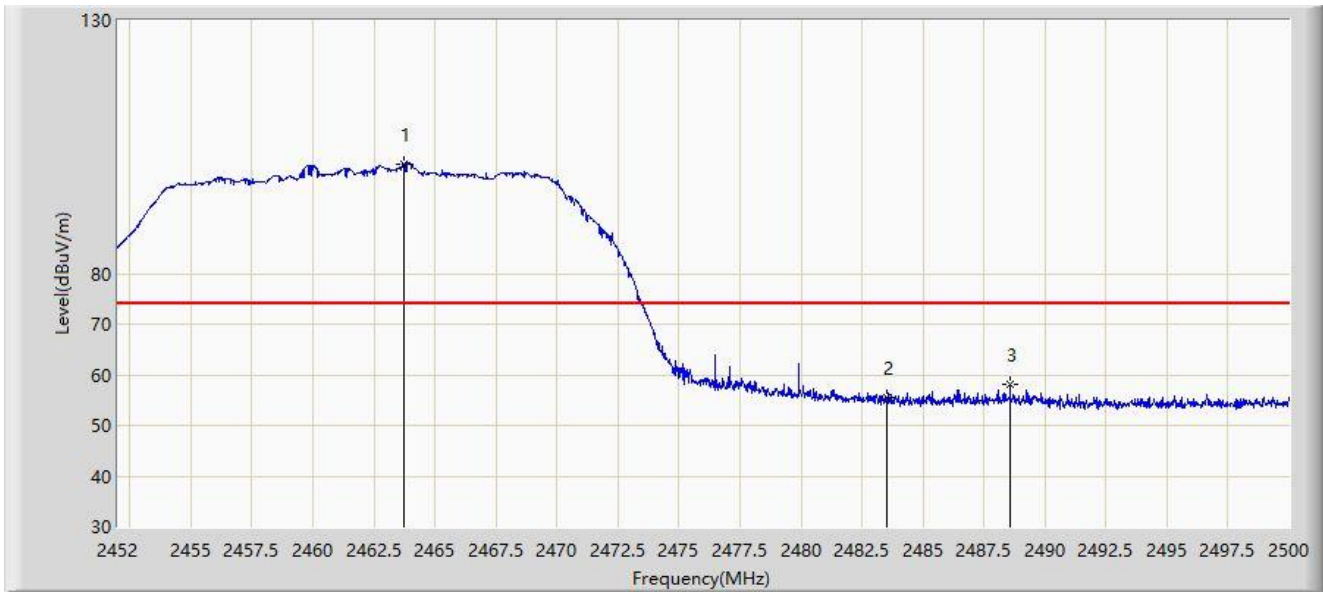


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.712	101.611	70.731	N/A	N/A	30.879	PK
2		2483.500	55.593	24.719	-18.407	74.000	30.874	PK
3	*	2488.576	58.085	27.188	-15.915	74.000	30.897	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:22
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 2	

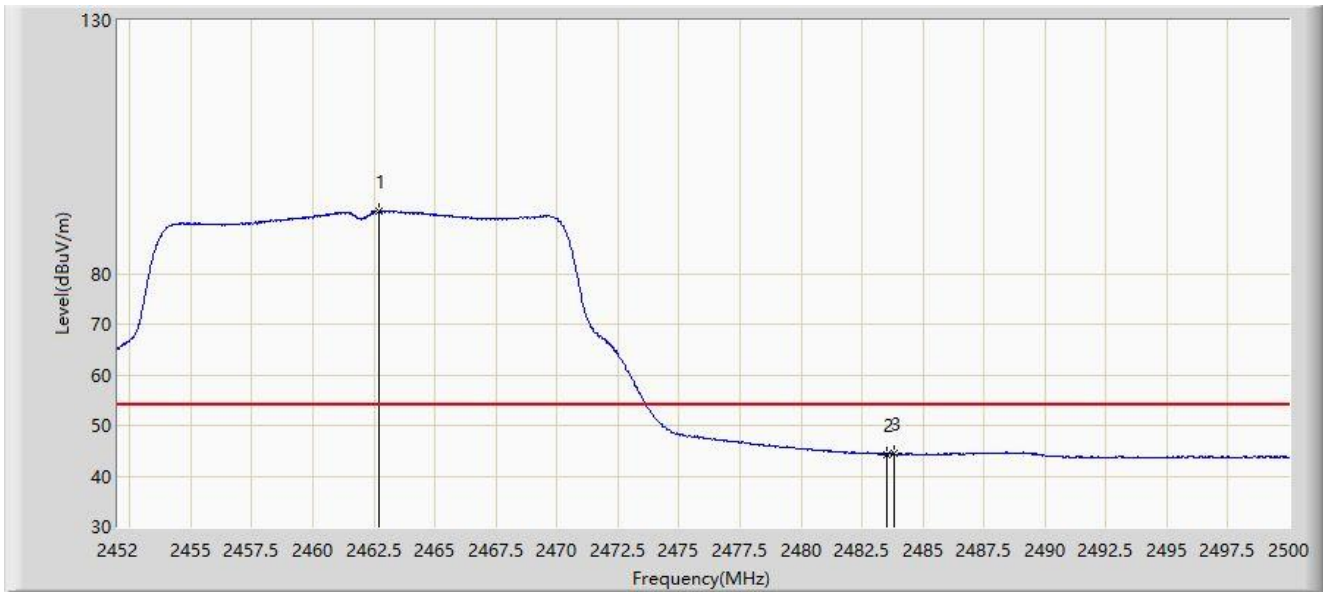


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.704	92.305	61.424	N/A	N/A	30.881	AV
2		2483.500	44.296	13.422	-9.704	54.000	30.874	AV
3	*	2483.800	44.403	13.528	-9.597	54.000	30.875	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:22
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 2	

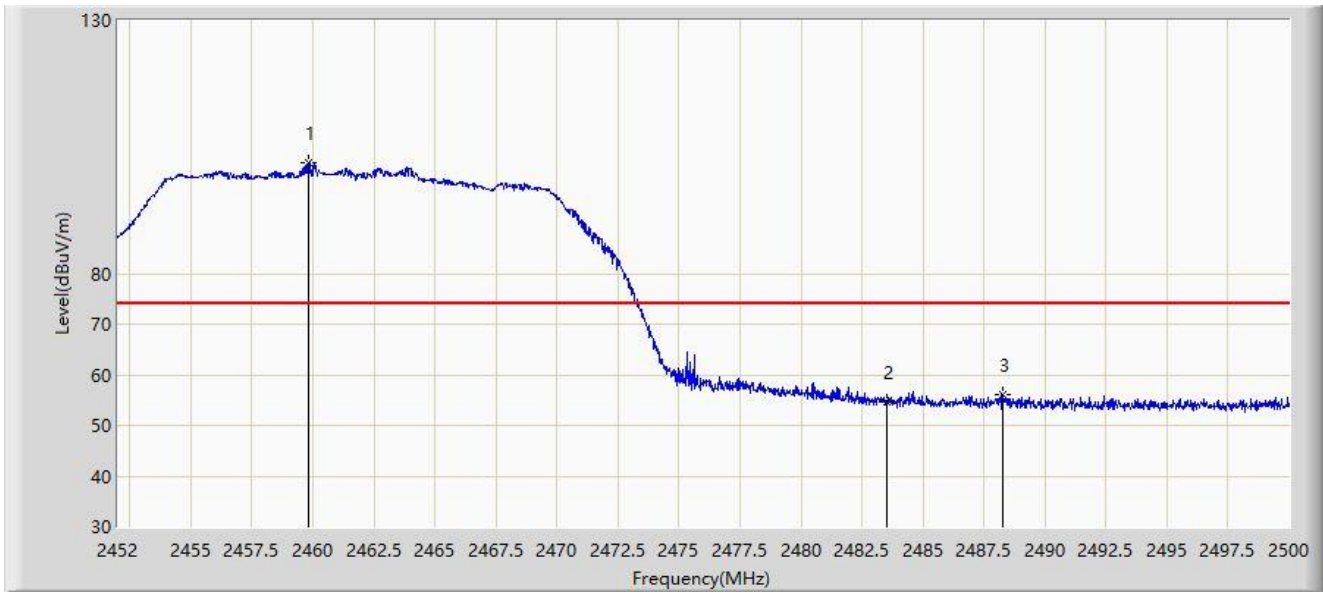


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.824	101.749	70.865	N/A	N/A	30.884	PK
2		2483.500	54.521	23.647	-19.479	74.000	30.874	PK
3	*	2488.264	55.953	25.057	-18.047	74.000	30.896	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:23
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at 2462MHz, Ant 2	

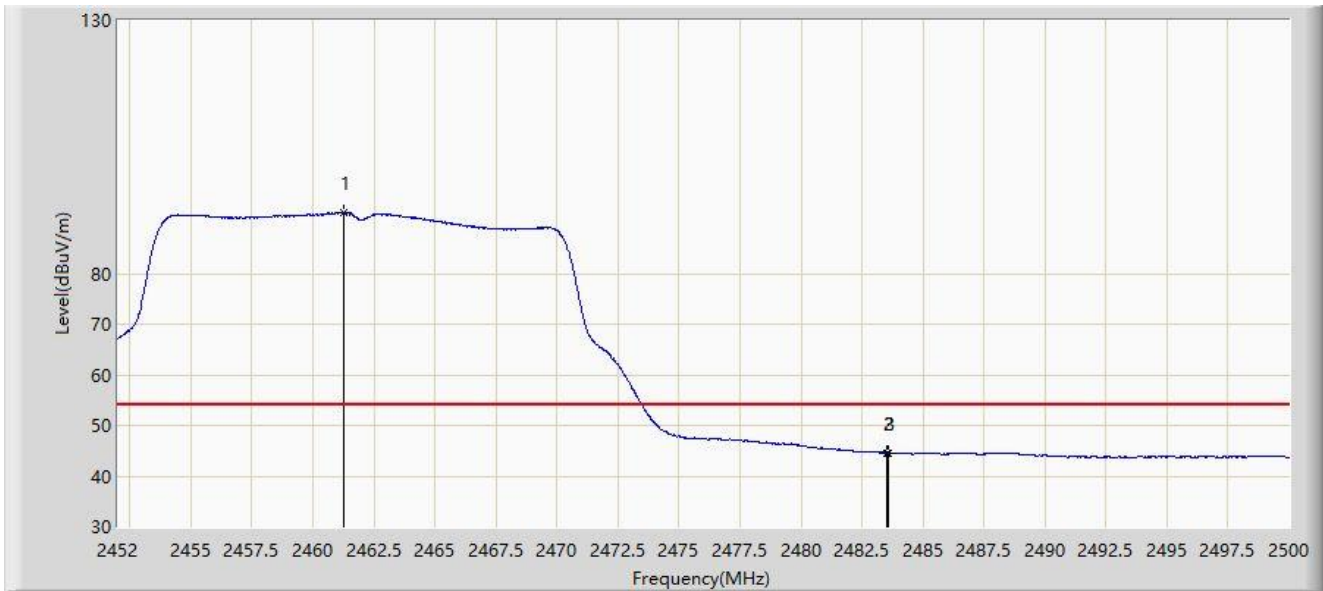


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.288	92.150	61.267	N/A	N/A	30.883	AV
2		2483.500	44.558	13.684	-9.442	54.000	30.874	AV
3	*	2483.560	44.587	13.713	-9.413	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/04/25 - 16:24
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2412MHz, Ant 2	

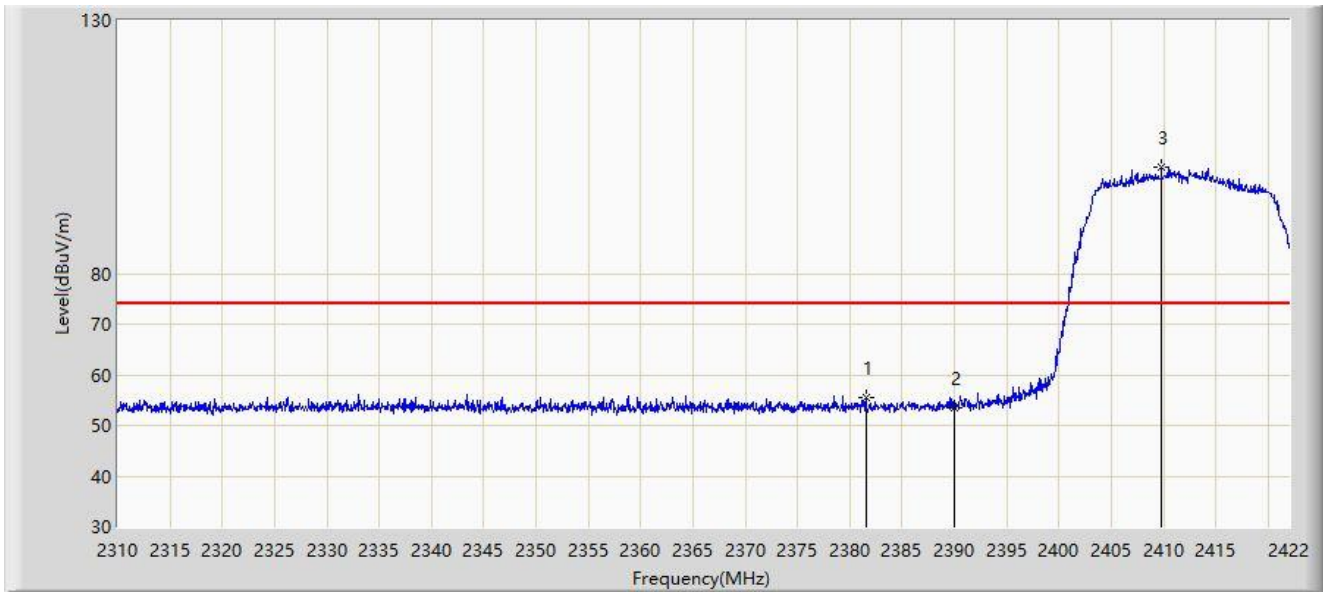

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2381.512	55.629	24.709	-18.371	74.000	30.919	PK
2		2390.000	53.404	22.487	-20.596	74.000	30.917	PK
3		2409.792	100.993	70.004	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).