

# FCC RF Test Report

APPLICANT : Quanta Computer Inc.  
EQUIPMENT : Clover Mobile WiFi  
BRAND NAME : Clover  
MODEL NAME : C200  
FCC ID : HFS-C200  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 25, 2014 and testing was completed on Dec. 26, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## TABLE OF CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                    | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                              | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                               | <b>5</b>  |
| 1.1 Applicant .....                                              | 5         |
| 1.2 Manufacturer .....                                           | 5         |
| 1.3 Product Feature of Equipment Under Test .....                | 5         |
| 1.4 Product Specification subjective to this standard .....      | 6         |
| 1.5 Modification of EUT .....                                    | 6         |
| 1.6 Testing Location .....                                       | 7         |
| 1.7 Applicable Standards .....                                   | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>        | <b>8</b>  |
| 2.1 Carrier Frequency and Channel .....                          | 8         |
| 2.2 Pre-Scanned RF Power .....                                   | 9         |
| 2.3 Test Mode .....                                              | 10        |
| 2.4 Connection Diagram of Test System .....                      | 11        |
| 2.5 Support Unit used in test configuration and system .....     | 12        |
| 2.6 EUT Operation Test Setup .....                               | 12        |
| 2.7 Measurement Results Explanation Example .....                | 12        |
| <b>3 TEST RESULT .....</b>                                       | <b>13</b> |
| 3.1 6dB and 99% Bandwidth Measurement .....                      | 13        |
| 3.2 Peak Output Power Measurement .....                          | 15        |
| 3.3 Power Spectral Density Measurement .....                     | 17        |
| 3.4 Conducted Band Edges and Spurious Emission Measurement ..... | 19        |
| 3.5 Radiated Band Edges and Spurious Emission Measurement .....  | 32        |
| 3.6 AC Conducted Emission Measurement .....                      | 36        |
| 3.7 Antenna Requirements .....                                   | 40        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                       | <b>42</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                         | <b>43</b> |
| <b>APPENDIX A. CONDUCTED TEST RESULTS</b>                        |           |
| <b>APPENDIX B. RADIATED TEST RESULTS</b>                         |           |
| <b>APPENDIX C. SETUP PHOTOGRAPHS</b>                             |           |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR4O2508C  | Rev. 01 | Initial issue of report | Jan. 27, 2015 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | IC Rule         | Description                                        | Limit                   | Result | Remark                              |
|----------------|--------------------|-----------------|----------------------------------------------------|-------------------------|--------|-------------------------------------|
| 3.1            | 15.247(a)(2)       | RSS-210 A8.2(a) | 6dB Bandwidth                                      | $\geq 0.5\text{MHz}$    | Pass   | -                                   |
| 3.1            | -                  | RSS-Gen 4.6.1   | 99% Bandwidth                                      | -                       | Pass   | -                                   |
| 3.2            | 15.247(b)          | RSS-210 A8.4    | Power Output Measurement                           | $\leq 30\text{dBm}$     | Pass   | -                                   |
| 3.3            | 15.247(e)          | RSS-210 A8.2(b) | Power Spectral Density                             | $\leq 8\text{dBm/3kHz}$ | Pass   | -                                   |
| 3.4            | 15.247(d)          | RSS-210 A8.5    | Conducted Band Edges                               | $\leq 20\text{dBc}$     | Pass   | -                                   |
|                |                    |                 | Conducted Spurious Emission                        |                         | Pass   | -                                   |
| 3.5            | 15.247(d)          | RSS-210 A8.5    | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d)   | Pass   | Under limit 0.04 dB at 2389.830 MHz |
| 3.6            | 15.207             | RSS-Gen 7.2.4   | AC Conducted Emission                              | 15.207(a)               | Pass   | Under limit 13.20 dB at 0.582 MHz   |
| 3.7            | 15.203 & 15.247(b) | RSS-210 A8.4    | Antenna Requirement                                | N/A                     | Pass   | -                                   |

# 1 General Description

## 1.1 Applicant

Quanta Computer Inc.

No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan

## 1.2 Manufacturer

Quanta Computer Inc.

No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                           |
|---------------------------------|---------------------------------------------------------------------------|
| Equipment                       | Clover Mobile WiFi                                                        |
| Brand Name                      | Clover                                                                    |
| Model Name                      | C200                                                                      |
| FCC ID                          | HFS-C200                                                                  |
| EUT supports Radios application | NFC<br>WLAN 11b/g/n HT20<br>WLAN 11a/n HT20/HT40<br>Bluetooth v4.0 EDR/LE |
| EUT Stage                       | Identical Prototype                                                       |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

| Accessory List |                                         |
|----------------|-----------------------------------------|
| AC Adapter 1   | Brand Name: Clover                      |
|                | Model Name: WB-10G05FU                  |
| AC Adapter 2   | Brand Name: Clover                      |
|                | Model Name: WB-10G05R                   |
| USB Cable      | Brand Name: Golden Bridge Electech Inc. |
|                | Model Name: AA002GB-B0308BX             |
| Battery        | Brand Name: CELXPRT ENERGY CORPORATION  |
|                | Model Name: CQT-1401                    |

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |  |                                                                                                                                                                                                                                                                                                                                                                                                         |        |
|---------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Tx/Rx Channel Frequency Range                     |  | 802.11b/g/n : 2412 MHz ~ 2462 MHz                                                                                                                                                                                                                                                                                                                                                                       |        |
| Maximum (Peak) Output Power to antenna            |  | <b>&lt;Ant. 1&gt;</b><br>802.11b : 19.27 dBm (0.0845 W)<br>802.11g : 23.07 dBm (0.2028 W)<br><b>&lt;Ant. 2&gt;</b><br>802.11b : 18.88 dBm (0.0773 W)<br>802.11g : 22.78 dBm (0.1897 W)<br><b>SISO &lt;Ant. 1&gt;</b><br>802.11n HT20 : 22.59 dBm (0.1816 W)<br><b>SISO &lt;Ant. 2&gt;</b><br>802.11n HT20 : 22.36 dBm (0.1722 W)<br><b>MIMO &lt;Ant. 1+2&gt;</b><br>802.11n HT20 : 25.33 dBm (0.3412 W) |        |
| 99% Occupied Bandwidth                            |  | 802.11b : 11.60MHz<br>802.11g : 17.25MHz<br>802.11n HT20 : 18.10MHz                                                                                                                                                                                                                                                                                                                                     |        |
| Antenna Type                                      |  | <b>&lt;Ant 1&gt;</b><br>802.11b/g/n :PIFA Antenna type with gain -2.84 dBi<br><b>&lt;Ant 2&gt;</b><br>802.11b/g/n : PIFA Antenna type with gain -3.79 dBi                                                                                                                                                                                                                                               |        |
| Type of Modulation                                |  | 802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                                                                                                                                                                                  |        |
| Antenna Function for Transmitter                  |  |                                                                                                                                                                                                                                                                                                                                                                                                         |        |
|                                                   |  | Ant. 1                                                                                                                                                                                                                                                                                                                                                                                                  | Ant. 2 |
|                                                   |  | 802.11 b                                                                                                                                                                                                                                                                                                                                                                                                | -      |
|                                                   |  | 802.11 g                                                                                                                                                                                                                                                                                                                                                                                                | -      |
|                                                   |  | 802.11 n SISO                                                                                                                                                                                                                                                                                                                                                                                           | V      |
| 802.11 n MIMO                                     |  | V                                                                                                                                                                                                                                                                                                                                                                                                       | V      |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                      |         |           |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                           |         |           |
| Test Site Location | No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |         |           |
| Test Site No.      | Sporton Site No.                                                                                                                                     |         |           |
|                    | TH02-HY                                                                                                                                              | CO05-HY | 03CH07-HY |

**Note:** The test site complies with ANSI C63.4 2009 requirement.

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table for frequency above 1GHz as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

| Frequency Band  | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|-----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 1       | 2412           | 7       | 2442           |
|                 | 2       | 2417           | 8       | 2447           |
|                 | 3       | 2422           | 9       | 2452           |
|                 | 4       | 2427           | 10      | 2457           |
|                 | 5       | 2432           | 11      | 2462           |
|                 | 6       | 2437           |         |                |

## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

### <Ant. 1>

| 802.11b          |        |        |          |         |
|------------------|--------|--------|----------|---------|
| Data Rate (MHz)  | 1M bps | 2M bps | 5.5M bps | 11M bps |
| Peak Power (dBm) | 19.27  | 19.21  | 19.24    | 19.26   |

| 802.11g          |        |        |         |         |         |         |         |         |
|------------------|--------|--------|---------|---------|---------|---------|---------|---------|
| Data Rate (MHz)  | 6M bps | 9M bps | 12M bps | 18M bps | 24M bps | 36M bps | 48M bps | 54M bps |
| Peak Power (dBm) | 23.07  | 23.01  | 22.89   | 22.85   | 22.78   | 22.83   | 22.85   | 22.89   |

### <Ant. 2>

| 802.11b          |        |        |          |         |
|------------------|--------|--------|----------|---------|
| Data Rate (MHz)  | 1M bps | 2M bps | 5.5M bps | 11M bps |
| Peak Power (dBm) | 18.88  | 18.76  | 18.79    | 18.75   |

| 802.11g          |        |        |         |         |         |         |         |         |
|------------------|--------|--------|---------|---------|---------|---------|---------|---------|
| Data Rate (MHz)  | 6M bps | 9M bps | 12M bps | 18M bps | 24M bps | 36M bps | 48M bps | 54M bps |
| Peak Power (dBm) | 22.78  | 22.69  | 22.60   | 22.58   | 22.61   | 22.53   | 22.52   | 22.71   |

### SISO <Ant. 1>

| 2.4GHz 802.11n HT20 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| Peak Power (dBm)    | 22.59 | 22.50 | 22.39 | 22.41 | 22.39 | 22.47 | 22.50 | 22.52 |

### SISO <Ant. 1>

| 2.4GHz 802.11n HT20 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| Peak Power (dBm)    | 22.36 | 22.01 | 22.01 | 22.11 | 22.10 | 22.01 | 22.02 | 22.11 |

### MIMO <Ant. 1+2>

| 2.4GHz 802.11n HT20 |       |       |       |       |       |       |       |       |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz)     | MCS8  | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 | MCS15 |
| Peak Power (dBm)    | 25.33 | 25.07 | 25.13 | 25.10 | 25.15 | 25.20 | 25.19 | 25.09 |

**Note:** MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

## 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

### Single Antenna

<2.4GHz>

| Modulation   | Data Rate |
|--------------|-----------|
| 802.11b      | 1 Mbps    |
| 802.11g      | 6 Mbps    |
| 802.11n HT20 | MCS0      |

### MIMO Antenna


<2.4GHz>

| Modulation   | Data Rate |
|--------------|-----------|
| 802.11n HT20 | MCS8      |


| Test Cases                   |                                                                                                                        |
|------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission</b> | Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + Camera (Back) + Earphone + USB Cable (Charging from Adapter) + TF       |
| <b>Remark:</b>               | TF stands for Test Fuction, and consists of Barcode Scan, Magnetic Stripe Card Read, Chipcard Read, and NFC Card Read. |

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

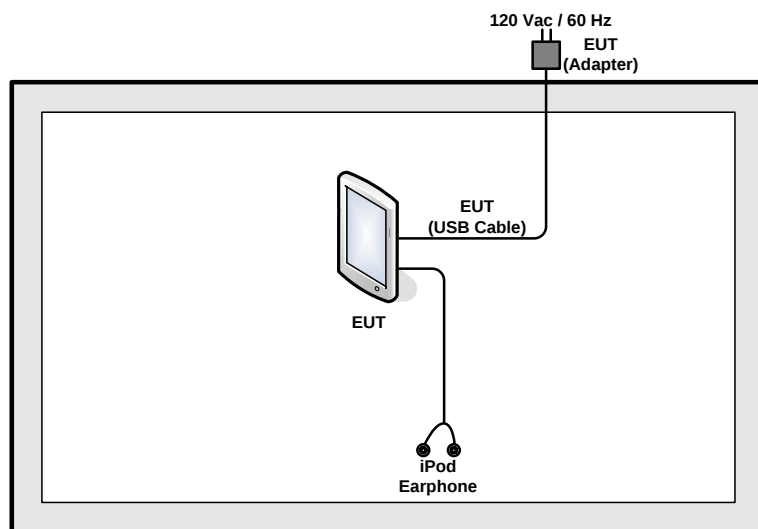

### <AC Conducted Emission Mode>

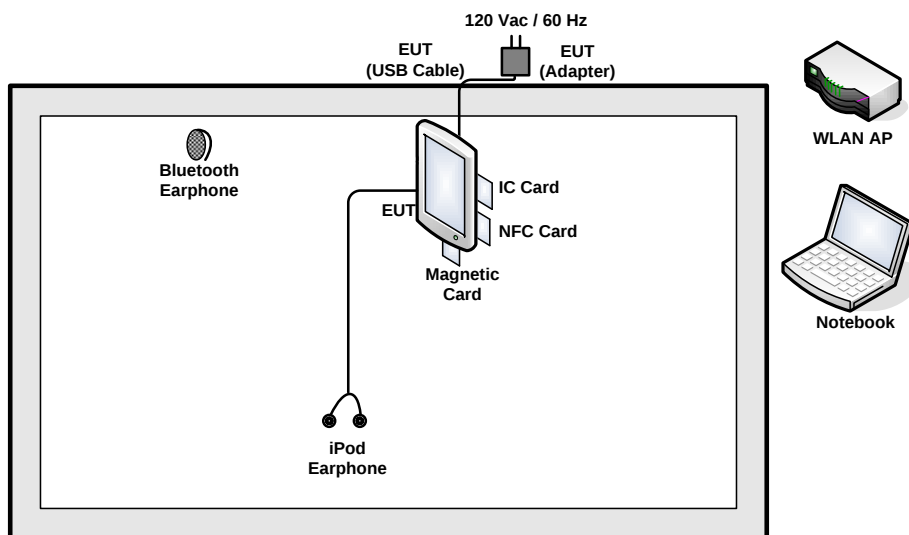

## 2.5 Support Unit used in test configuration and system

| Item | Equipment          | Trade Name    | Model Name     | FCC ID                                       | Data Cable        | Power Cord                                                 |
|------|--------------------|---------------|----------------|----------------------------------------------|-------------------|------------------------------------------------------------|
| 1.   | WLAN AP            | D-Link        | DIR-628        | KA2DIR628A2                                  | N/A               | Unshielded, 1.8 m                                          |
| 2.   | Notebook           | DELL          | Latitude E6320 | FCC DoC/<br>Contains FCC ID:<br>QDS-BRCM1054 | N/A               | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 3.   | Bluetooth Earphone | Sony Ericsson | MW600          | PY7DDA-2029                                  | N/A               | N/A                                                        |
| 4.   | iPod Earphone      | Apple         | N/A            | Verification                                 | Unshielded, 1.0 m | N/A                                                        |
| 5.   | IC Card            | N/A           | N/A            | N/A                                          | N/A               | N/A                                                        |
| 6.   | Magnetic Card      | N/A           | N/A            | N/A                                          | N/A               | N/A                                                        |
| 7.   | NFC Card           | N/A           | N/A            | N/A                                          | N/A               | N/A                                                        |

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

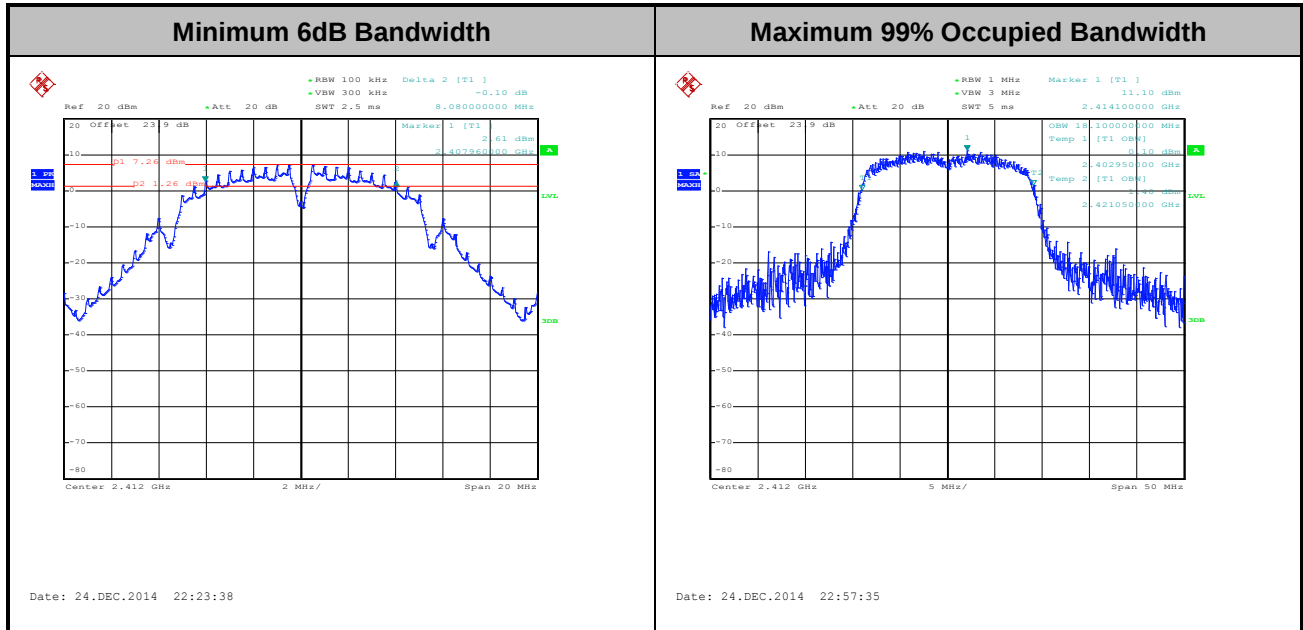

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup





### **3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A of this test report.

### **3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus  $10 \log(N)$  exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add  $10 \log(N)$  dB, where N is the number of outputs. (N=2)

### 3.3.4 Test Setup

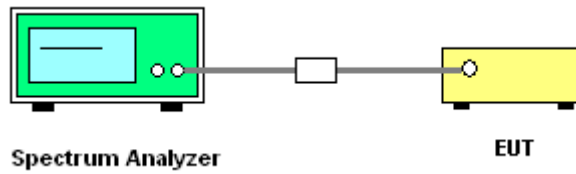

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

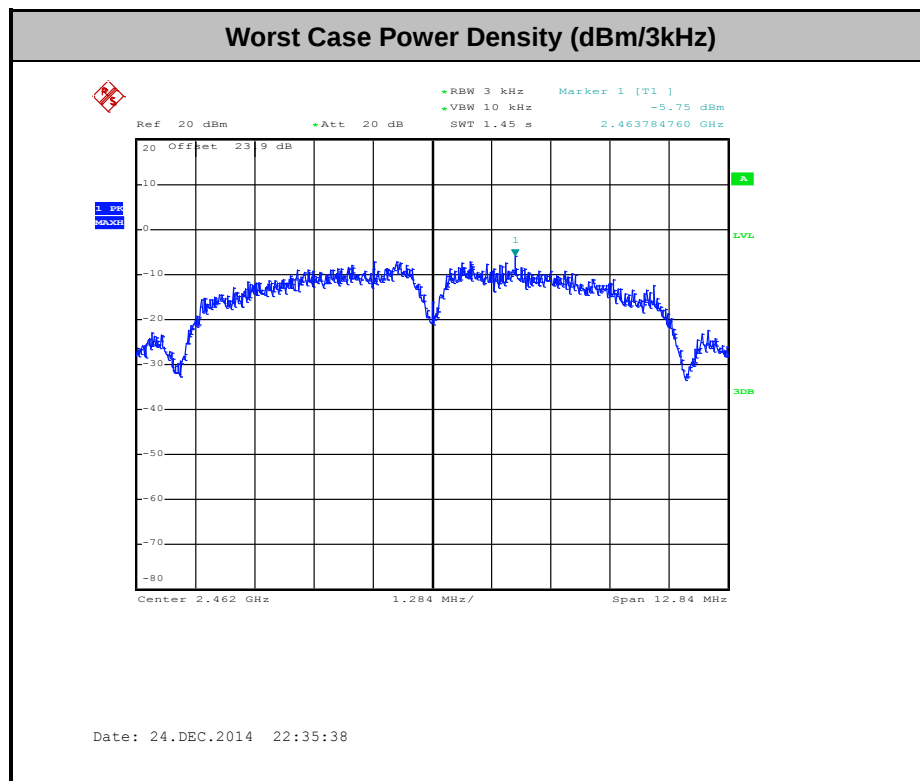

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

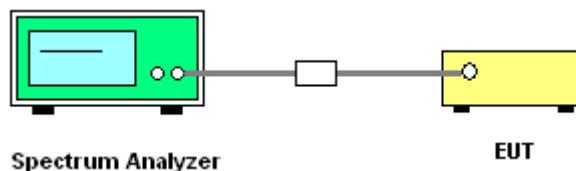




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)

|                |            |                     |                       |
|----------------|------------|---------------------|-----------------------|
| Number of TX   | 1          | Ant. :              | 1                     |
| Test Mode :    | 802.11b    | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 51~54%                |
| Test Channel : | 01         | Test Engineer :     | Bill Kuo and AC Chang |

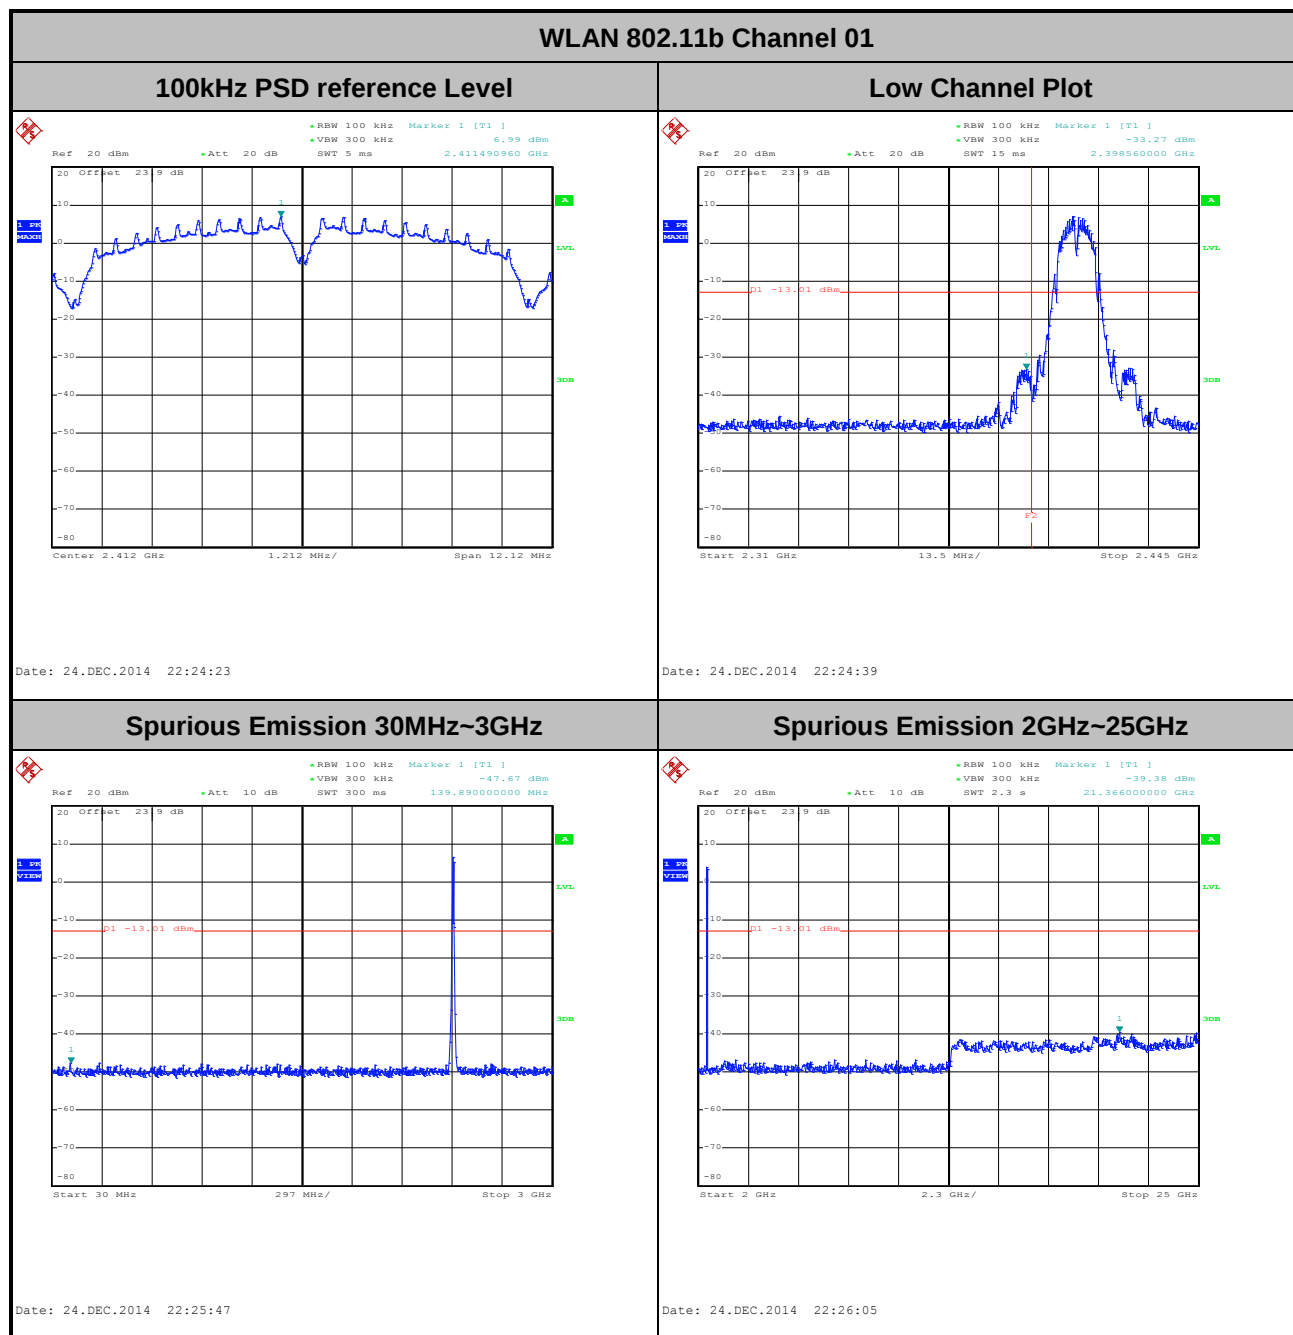




|                |            |                     |                       |
|----------------|------------|---------------------|-----------------------|
| Number of TX : | 1          | Ant. :              | 1                     |
| Test Mode :    | 802.11b    | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Mid | Relative Humidity : | 51~54%                |
| Test Channel : | 06         | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11b Channel 06

## 100kHz PSD reference Level

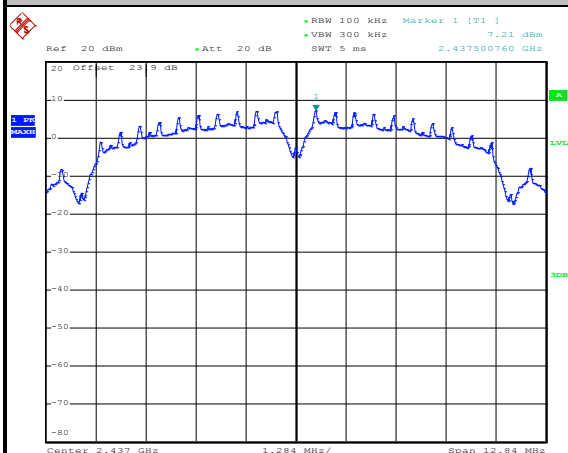


Date: 24.DEC.2014 22:32:50

## Spurious Emission 30MHz~3GHz

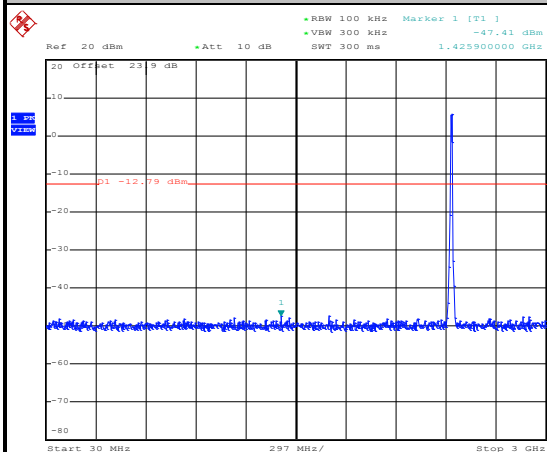

Date: 24.DEC.2014 22:33:21

## Spurious Emission 2GHz~25GHz

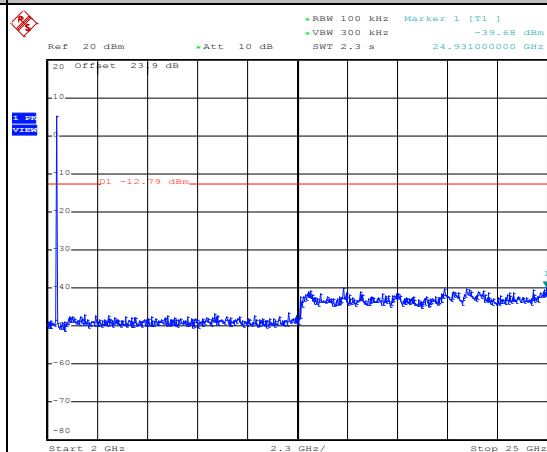


Date: 24.DEC.2014 22:33:39



|                |             |                     |                       |
|----------------|-------------|---------------------|-----------------------|
| Number of TX : | 1           | Ant. :              | 1                     |
| Test Mode :    | 802.11b     | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz High | Relative Humidity : | 51~54%                |
| Test Channel : | 11          | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11b Channel 11

## 100kHz PSD reference Level

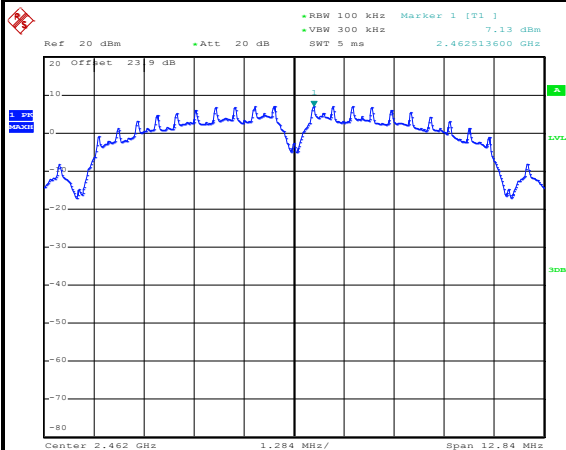


Date: 24.DEC.2014 22:36:05

## High Channel Plot

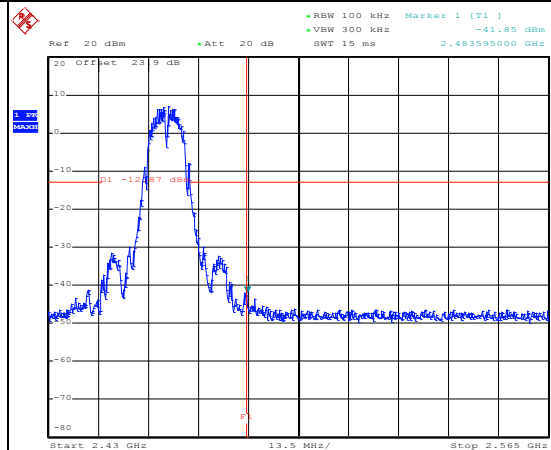


Date: 24.DEC.2014 23:35:54

## Spurious Emission 30MHz~3GHz

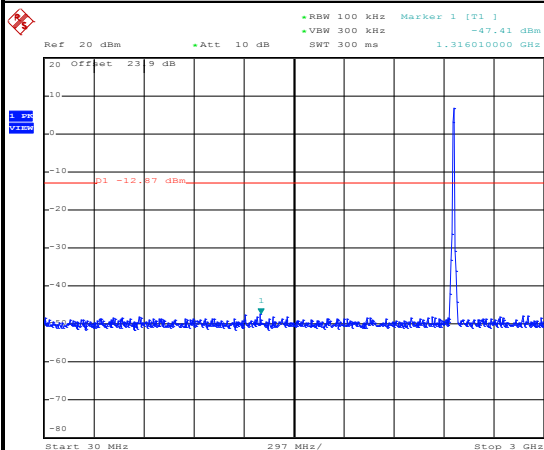

Date: 24.DEC.2014 22:38:50

## Spurious Emission 2GHz~25GHz

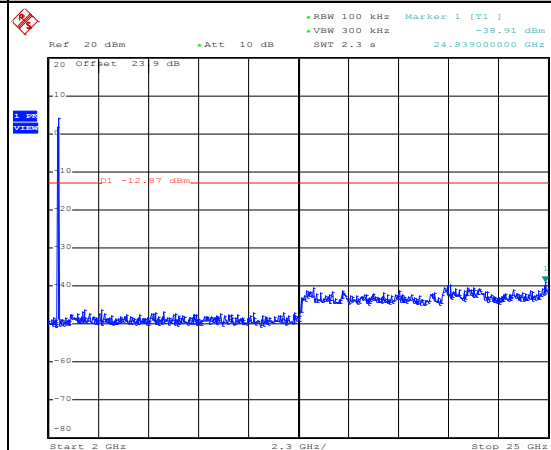


Date: 24.DEC.2014 22:39:08



|                |            |                     |                       |
|----------------|------------|---------------------|-----------------------|
| Number of TX : | 1          | Ant. :              | 1                     |
| Test Mode :    | 802.11g    | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 51~54%                |
| Test Channel : | 01         | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11g Channel 01

## 100kHz PSD reference Level

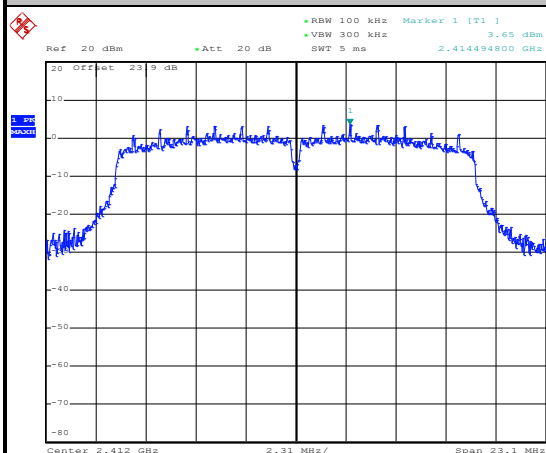


Date: 24.DEC.2014 22:52:21

## Low Channel Plot

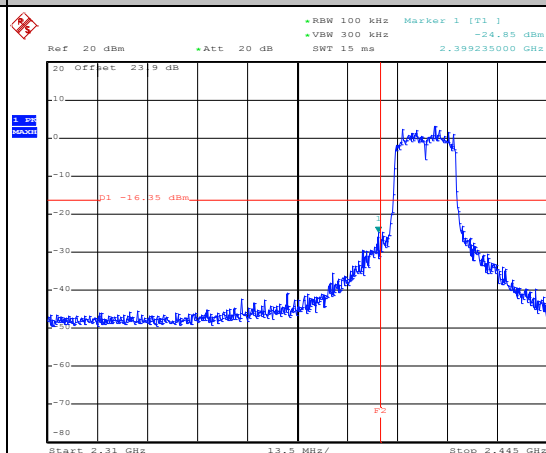


Date: 24.DEC.2014 22:52:43

## Spurious Emission 30MHz~3GHz

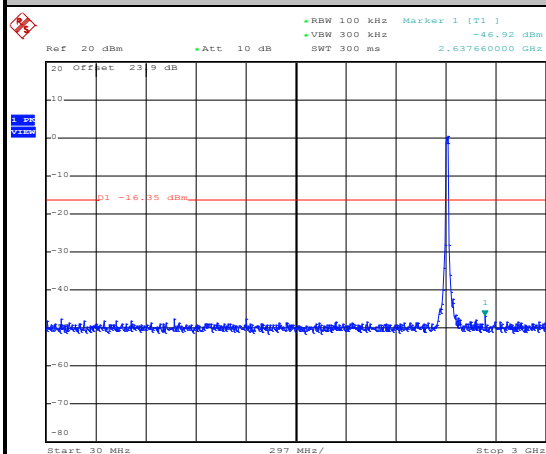

Date: 24.DEC.2014 22:53:08

## Spurious Emission 2GHz~25GHz

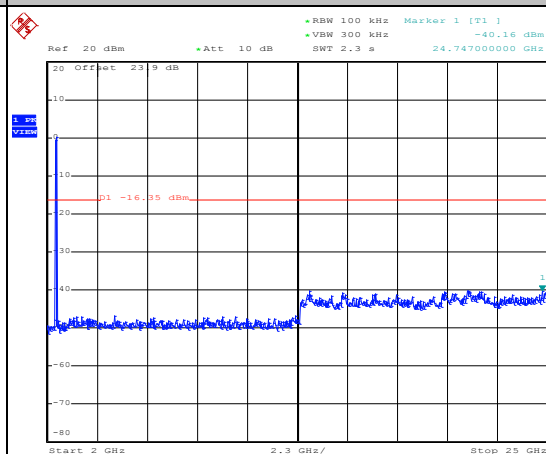


Date: 24.DEC.2014 22:53:26




|                |            |                     |                       |
|----------------|------------|---------------------|-----------------------|
| Number of TX : | 1          | Ant. :              | 1                     |
| Test Mode :    | 802.11g    | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Mid | Relative Humidity : | 51~54%                |
| Test Channel : | 06         | Test Engineer :     | Bill Kuo and AC Chang |

## WLAN 802.11g Channel 06


## 100kHz PSD reference Level

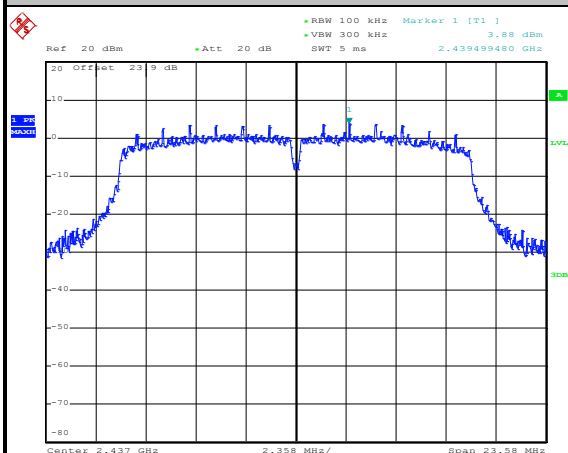

## Spurious Emission 30MHz~3GHz

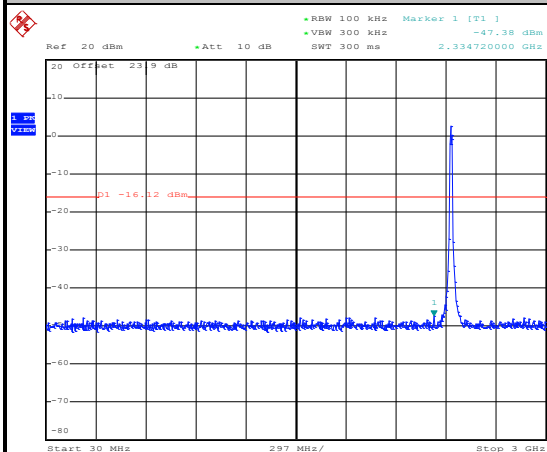

## Spurious Emission 2GHz~25GHz

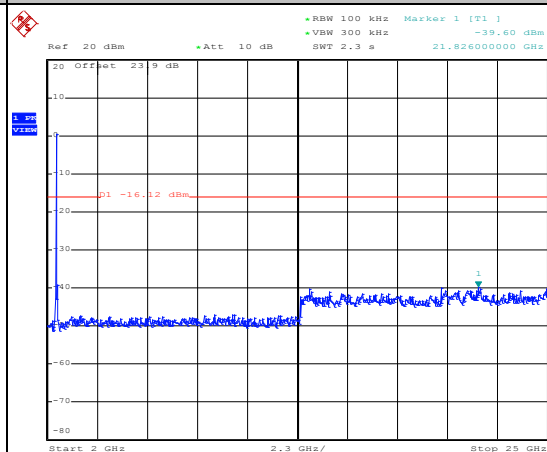




|                |             |                     |                       |
|----------------|-------------|---------------------|-----------------------|
| Number of TX : | 1           | Ant. :              | 1                     |
| Test Mode :    | 802.11g     | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz High | Relative Humidity : | 51~54%                |
| Test Channel : | 11          | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11g Channel 11

## 100kHz PSD reference Level

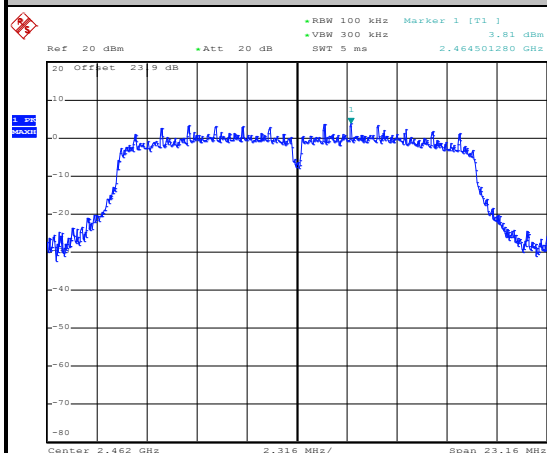


Date: 24.DEC.2014 22:42:20

## High Channel Plot

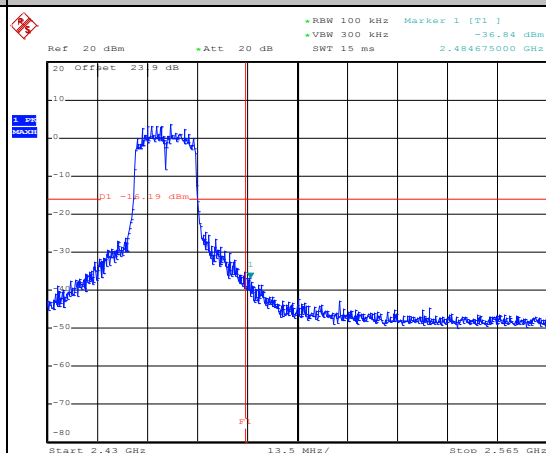


Date: 24.DEC.2014 22:43:01

## Spurious Emission 30MHz~3GHz

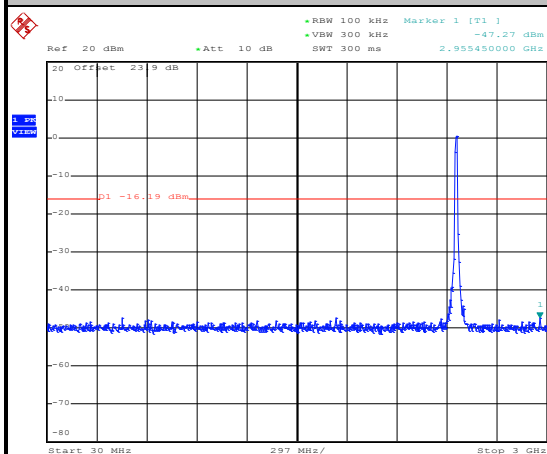

Date: 24.DEC.2014 22:43:26

## Spurious Emission 2GHz~25GHz

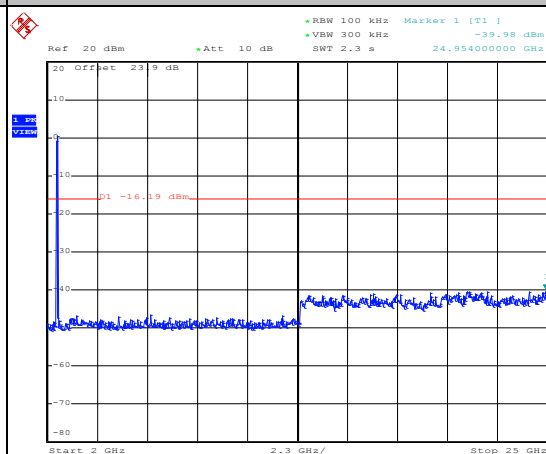

Date: 24.DEC.2014 22:43:44




Number of TX = 2, Ant. 1 (Measured)

|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 1                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%                |
| Test Channel : | 01           | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11n HT20 Channel 01

## 100kHz PSD reference Level

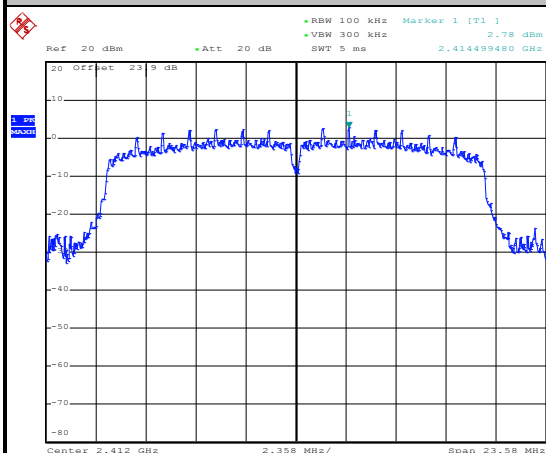


Date: 24.DEC.2014 23:07:52

## Low Channel Plot

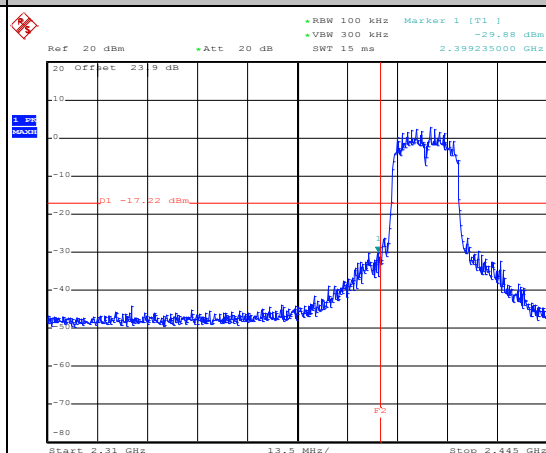


Date: 24.DEC.2014 23:08:33

## Spurious Emission 30MHz~3GHz

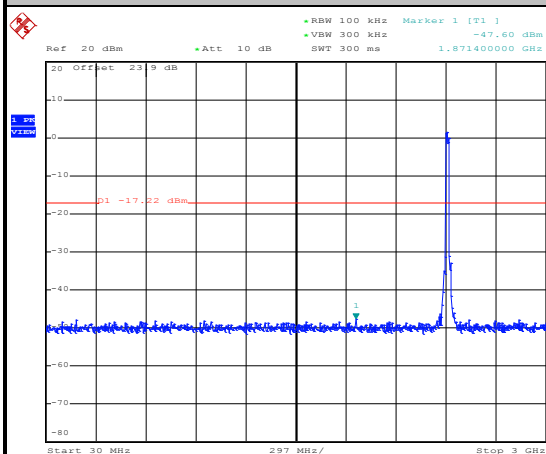

Date: 24.DEC.2014 23:09:07


## Spurious Emission 2GHz~25GHz

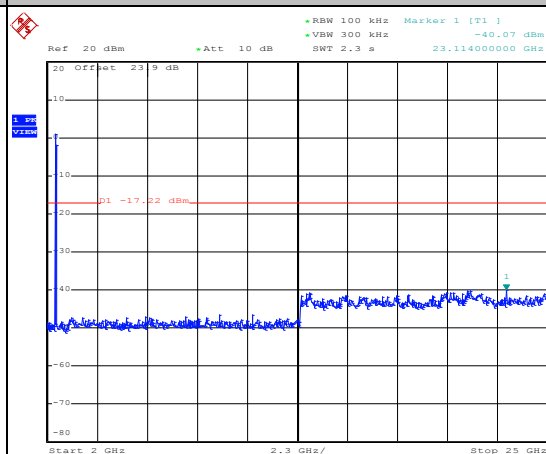


Date: 24.DEC.2014 23:09:25




|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 1                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%                |
| Test Channel : | 06           | Test Engineer :     | Bill Kuo and AC Chang |

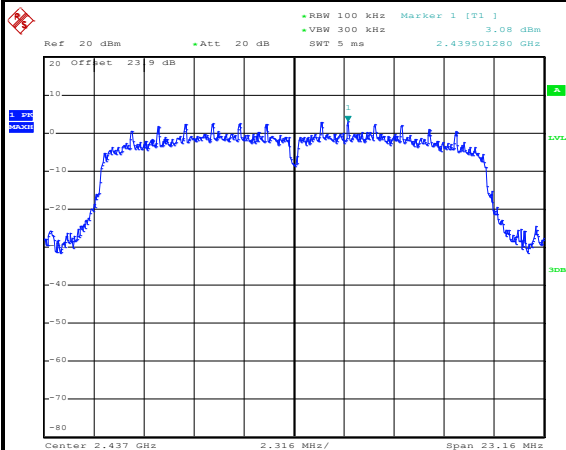**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level**

Date: 24.DEC.2014 23:14:43

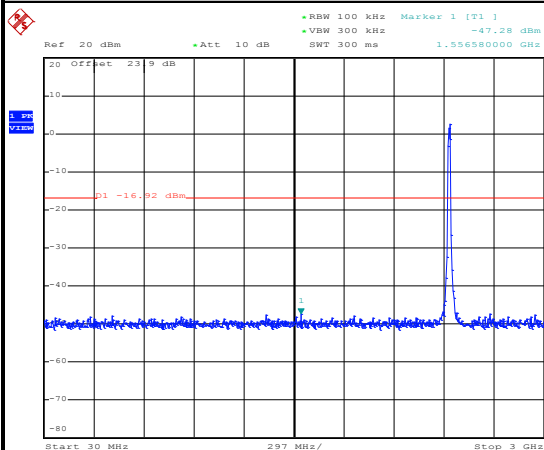**Spurious Emission 30MHz~3GHz**

Date: 24.DEC.2014 23:15:08

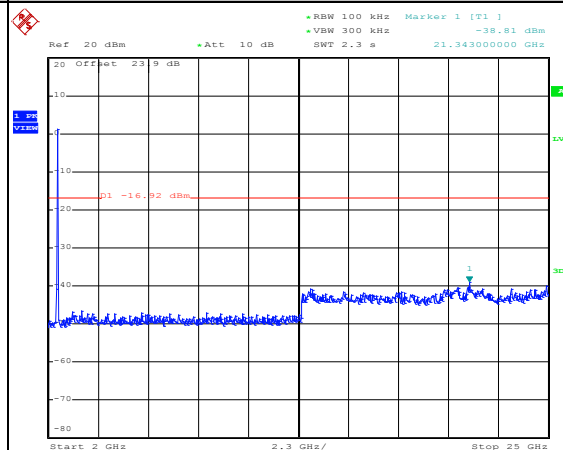**Spurious Emission 2GHz~25GHz**


Date: 24.DEC.2014 23:15:26



|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 1                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%                |
| Test Channel : | 11           | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11n HT20 Channel 11

## 100kHz PSD reference Level

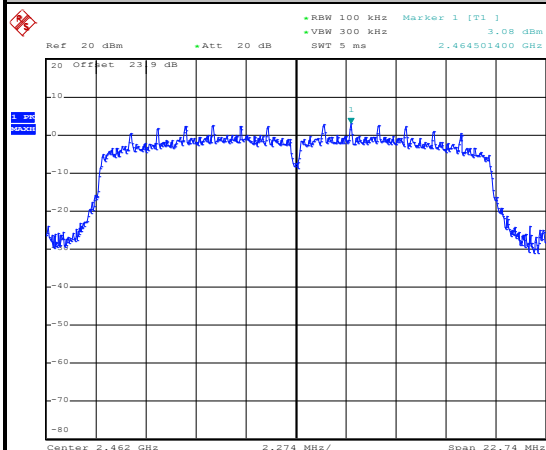


Date: 24.DEC.2014 23:26:15

## High Channel Plot

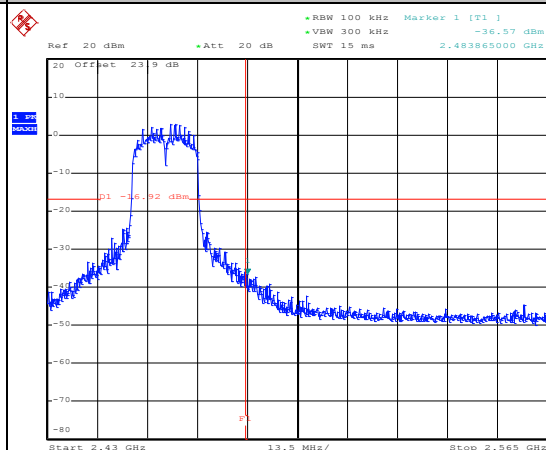


Date: 24.DEC.2014 23:29:28

## Spurious Emission 30MHz~3GHz

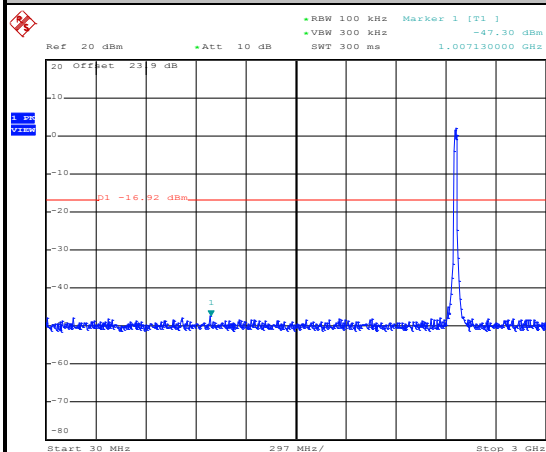

Date: 24.DEC.2014 23:26:54

## Spurious Emission 2GHz~25GHz

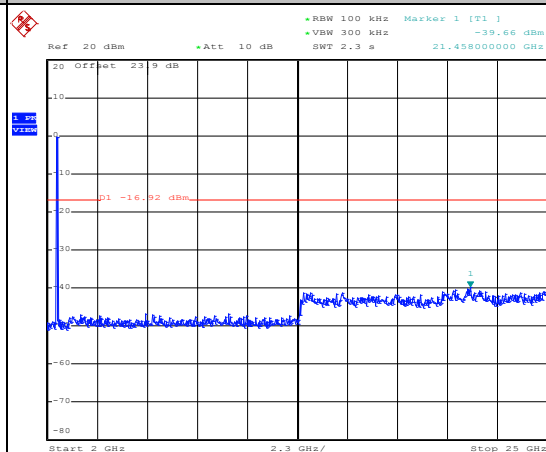

Date: 24.DEC.2014 23:27:12




Number of TX = 2, Ant. 2 (Measured)

|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 2                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 51~54%                |
| Test Channel : | 01           | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11n HT20 Channel 01

## 100kHz PSD reference Level

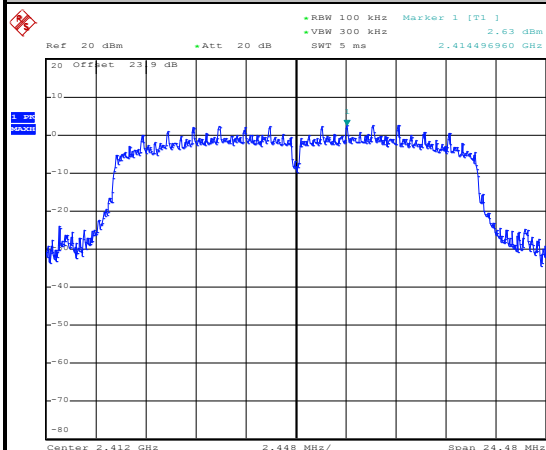


Date: 24.DEC.2014 23:03:25

## Low Channel Plot

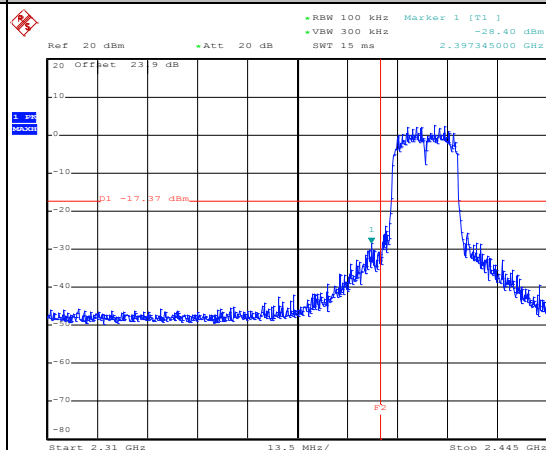


Date: 24.DEC.2014 23:04:02

## Spurious Emission 30MHz~3GHz

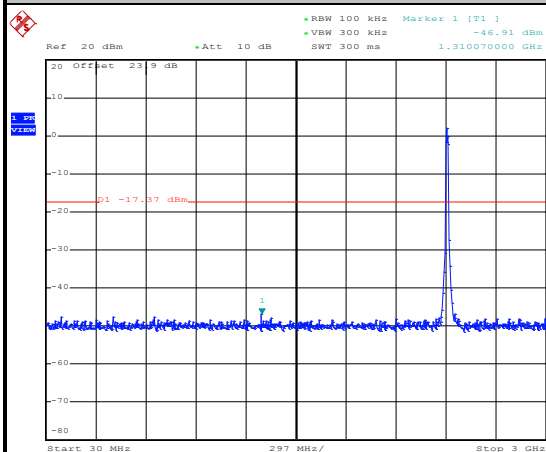

Date: 24.DEC.2014 23:04:23

## Spurious Emission 2GHz~25GHz

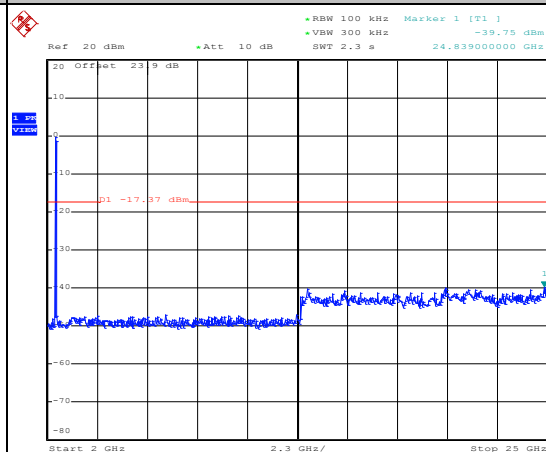


Date: 24.DEC.2014 23:04:41



|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 2                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 51~54%                |
| Test Channel : | 06           | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11n HT20 Channel 06

## 100kHz PSD reference Level

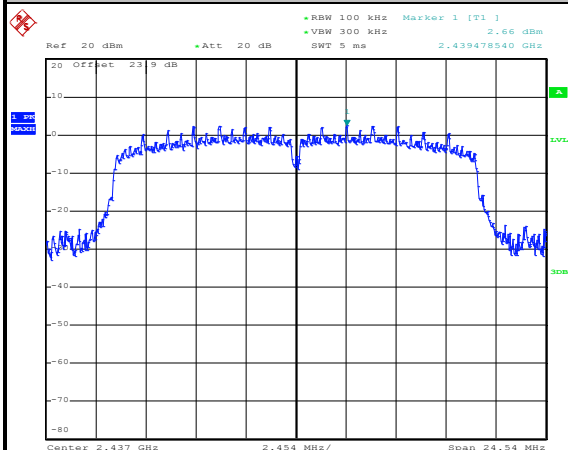


Date: 24.DEC.2014 23:18:13

## Spurious Emission 30MHz~3GHz

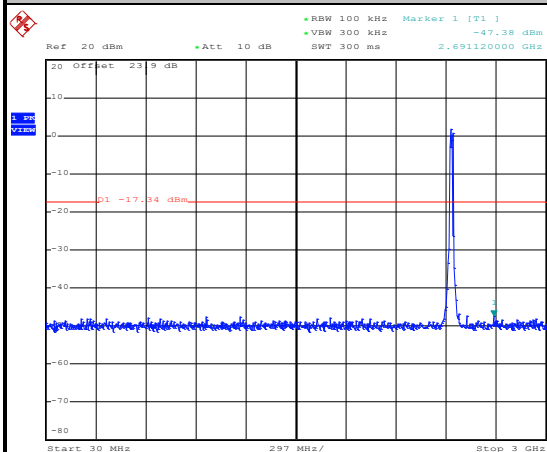

Date: 24.DEC.2014 23:19:14

## Spurious Emission 2GHz~25GHz

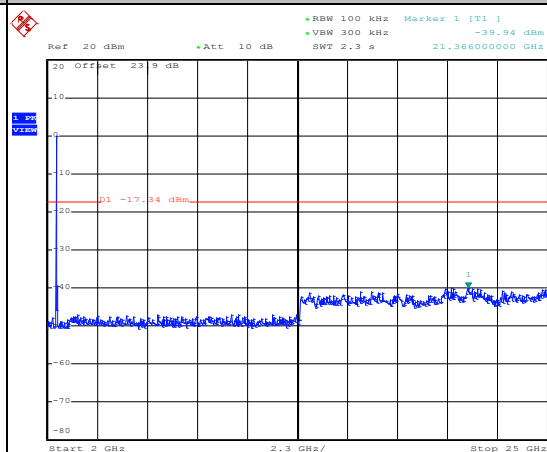


Date: 24.DEC.2014 23:19:32



|                |              |                     |                       |
|----------------|--------------|---------------------|-----------------------|
| Number of TX : | 2            | Ant. :              | 2                     |
| Test Mode :    | 802.11n HT20 | Temperature :       | 21~25°C               |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 51~54%                |
| Test Channel : | 11           | Test Engineer :     | Bill Kuo and AC Chang |


## WLAN 802.11n HT20 Channel 11

## 100kHz PSD reference Level

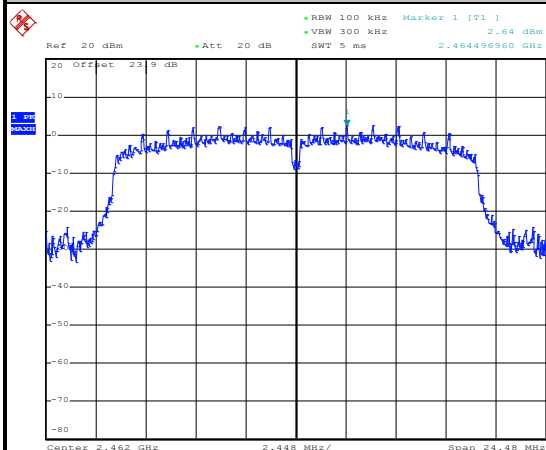


Date: 24.DEC.2014 23:22:44

## High Channel Plot

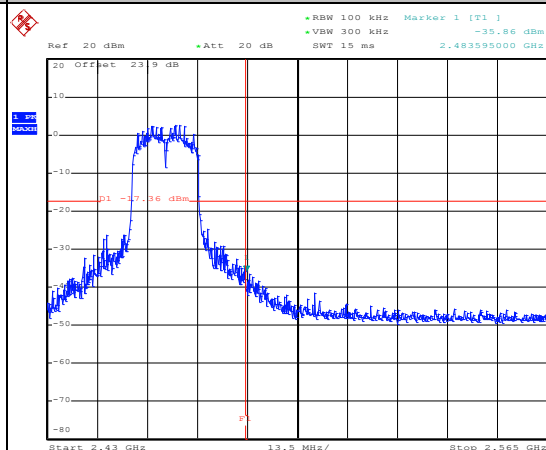


Date: 24.DEC.2014 23:23:58

## Spurious Emission 30MHz~3GHz

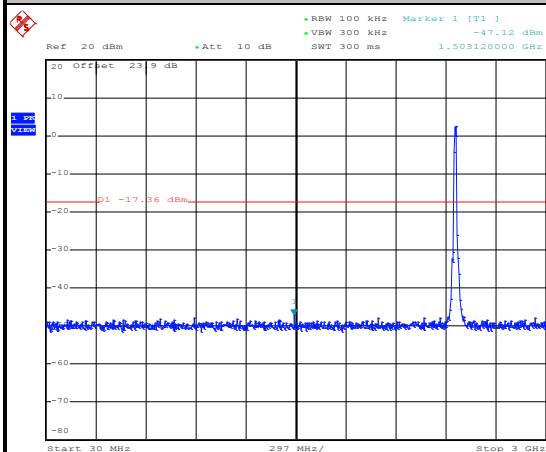

Date: 24.DEC.2014 23:23:23

## Spurious Emission 2GHz~25GHz

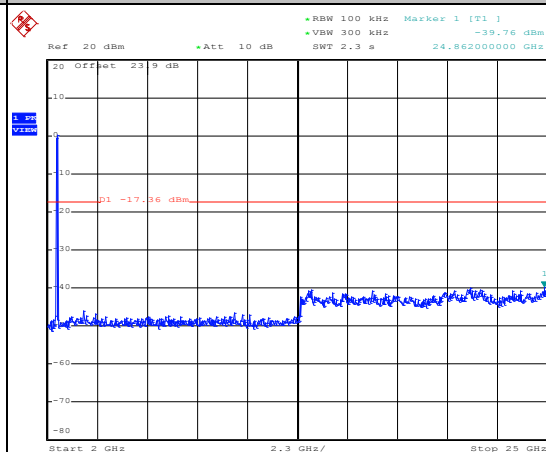

Date: 24.DEC.2014 23:23:41

## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Use the following spectrum analyzer settings:

- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold;
- (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Antenna | Band                           | Duty Cycle(%) | T(us)    | 1/T(kHz) | VBW Setting |
|---------|--------------------------------|---------------|----------|----------|-------------|
| 1       | 802.11b                        | 97.64         | 12420.00 | 0.08     | 100Hz       |
| 2       | 802.11b                        | 97.65         | 12480.00 | 0.08     | 100Hz       |
| 1       | 802.11g                        | 87.39         | 2080.00  | 0.48     | 1kHz        |
| 2       | 802.11g                        | 87.29         | 2060.00  | 0.49     | 1kHz        |
| 1       | 2.4GHz 802.11n HT20 for Ant. 1 | 86.61         | 1940.00  | 0.52     | 1kHz        |
| 2       | 2.4GHz 802.11n HT20 for Ant. 2 | 86.61         | 1940.00  | 0.52     | 1kHz        |
| 1+2     | 2.4GHz 802.11n HT20 for Ant. 1 | 76.92         | 1000.00  | 1.00     | 1kHz        |
| 1+2     | 2.4GHz 802.11n HT20 for Ant. 2 | 76.56         | 980.00   | 1.02     | 3kHz        |

### 3.5.4 Test Setup


For radiated emissions below 30MHz

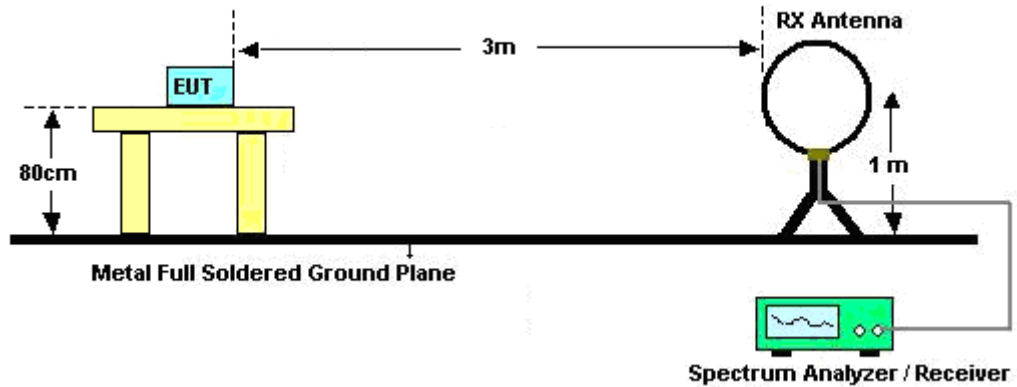

For radiated emissions from 30MHz to 1GHz

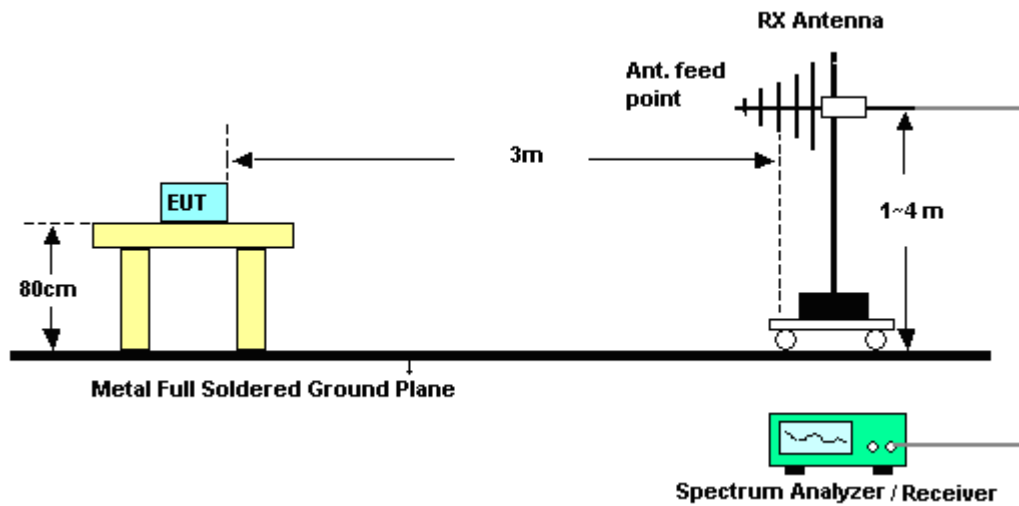

For radiated emissions above 1GHz

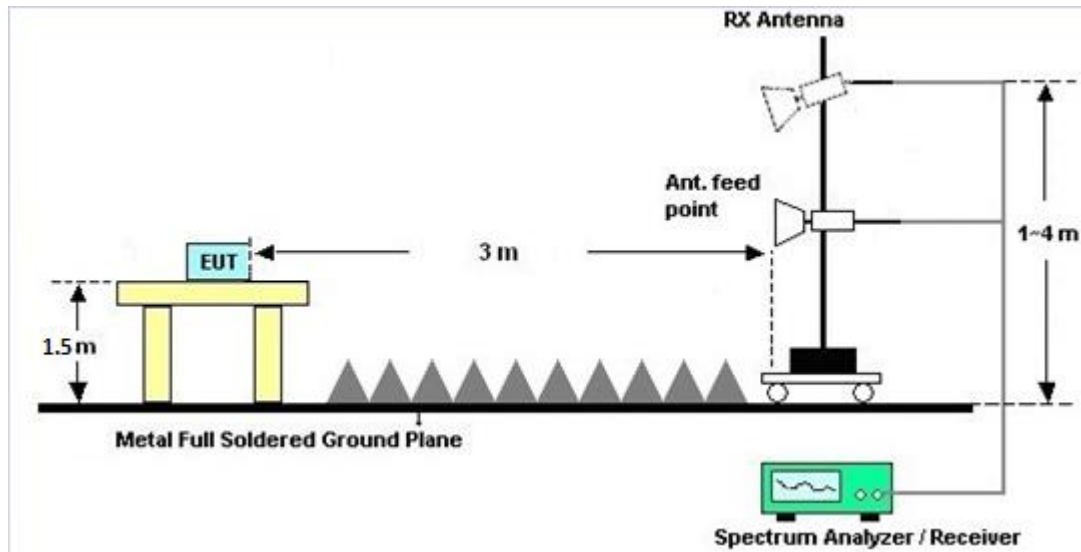

### 3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B of this test report.

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B of this test report.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission<br>(MHz) | Conducted Limit (dB $\mu$ V) |           |
|--------------------------------|------------------------------|-----------|
|                                | Quasi-Peak                   | Average   |
| 0.15-0.5                       | 66 to 56*                    | 56 to 46* |
| 0.5-5                          | 56                           | 46        |
| 5-30                           | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.



### 3.6.5 Test Result of AC Conducted Emission

|                        |                                                                                                            |                            |         |
|------------------------|------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                                     | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Eric Jeng                                                                                                  | <b>Relative Humidity :</b> | 46~48%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                              | <b>Phase :</b>             | Line    |
| <b>Function Type :</b> | Bluetooth Link + WLAN (2.4GHz) Link + Camera (Back) + Earphone + USB Cable<br>(Charging from Adapter) + TF |                            |         |

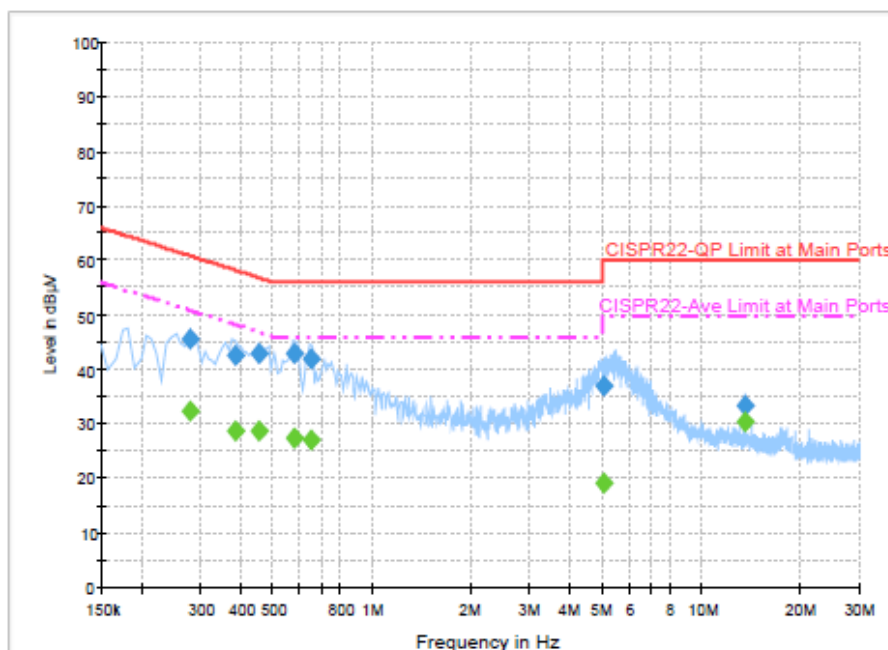


#### Final Result : Quasi-Peak

| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.278000        | 45.7              | Off    | L1   | 19.5       | 15.2        | 60.9         |
| 0.382000        | 42.7              | Off    | L1   | 19.5       | 15.5        | 58.2         |
| 0.454000        | 42.8              | Off    | L1   | 19.5       | 14.0        | 56.8         |
| 0.582000        | 42.8              | Off    | L1   | 19.5       | 13.2        | 56.0         |
| 0.654000        | 41.9              | Off    | L1   | 19.5       | 14.1        | 56.0         |
| 5.030000        | 37.0              | Off    | L1   | 19.6       | 23.0        | 60.0         |
| 13.558000       | 33.4              | Off    | L1   | 19.7       | 26.6        | 60.0         |

#### Final Result : Average

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.278000        | 32.3           | Off    | L1   | 19.5       | 18.6        | 50.9         |
| 0.382000        | 28.9           | Off    | L1   | 19.5       | 19.3        | 48.2         |
| 0.454000        | 28.6           | Off    | L1   | 19.5       | 18.2        | 46.8         |
| 0.582000        | 27.4           | Off    | L1   | 19.5       | 18.6        | 46.0         |
| 0.654000        | 27.2           | Off    | L1   | 19.5       | 18.8        | 46.0         |
| 5.030000        | 19.2           | Off    | L1   | 19.6       | 30.8        | 50.0         |
| 13.558000       | 30.2           | Off    | L1   | 19.7       | 19.8        | 50.0         |

|                        |                                                                                                            |                            |         |
|------------------------|------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                                     | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Eric Jeng                                                                                                  | <b>Relative Humidity :</b> | 46~48%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                              | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | Bluetooth Link + WLAN (2.4GHz) Link + Camera (Back) + Earphone + USB Cable<br>(Charging from Adapter) + TF |                            |         |

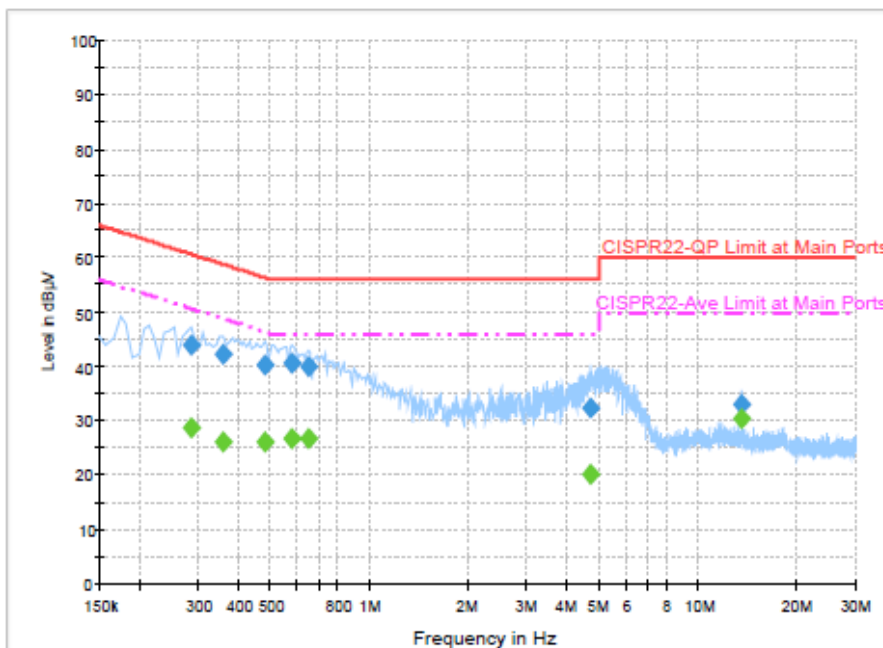
**Final Result : Quasi-Peak**

| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.286000        | 44.0              | Off    | N    | 19.5       | 16.6        | 60.6         |
| 0.358000        | 42.4              | Off    | N    | 19.5       | 16.4        | 58.8         |
| 0.478000        | 40.4              | Off    | N    | 19.5       | 16.0        | 56.4         |
| 0.582000        | 40.7              | Off    | N    | 19.5       | 15.3        | 56.0         |
| 0.654000        | 39.8              | Off    | N    | 19.5       | 16.2        | 56.0         |
| 4.670000        | 32.2              | Off    | N    | 19.6       | 23.8        | 56.0         |
| 13.558000       | 32.9              | Off    | N    | 19.7       | 27.1        | 60.0         |

**Final Result : Average**

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.286000        | 28.6           | Off    | N    | 19.5       | 22.0        | 50.6         |
| 0.358000        | 26.1           | Off    | N    | 19.5       | 22.7        | 48.8         |
| 0.478000        | 25.9           | Off    | N    | 19.5       | 20.5        | 46.4         |
| 0.582000        | 26.8           | Off    | N    | 19.5       | 19.2        | 46.0         |
| 0.654000        | 26.8           | Off    | N    | 19.5       | 19.2        | 46.0         |
| 4.670000        | 20.0           | Off    | N    | 19.6       | 26.0        | 46.0         |
| 13.558000       | 30.2           | Off    | N    | 19.7       | 19.8        | 50.0         |

### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.



|         |        |        | DG    | DG    | Power     | PSD       |
|---------|--------|--------|-------|-------|-----------|-----------|
|         |        |        | for   | for   | Limit     | Limit     |
|         | Ant. 1 | Ant. 2 | Power | PSD   | Reduction | Reduction |
|         | (dBi)  | (dBi)  | (dBi) | (dBi) | (dB)      | (dB)      |
| 2.4 GHz | -2.84  | -3.79  | -0.29 | -0.29 | 0.00      | 0.00      |
|         |        |        |       |       |           |           |

*Power Limit Reduction = DG(Power) – 6dBi, ( min = 0 )*

*PSD Limit Reduction = DG(PSD) – 6dBi, ( min = 0 )*



## 4 List of Measuring Equipment

| Instrument                        | Manufacturer    | Model No.                  | Serial No.      | Characteristics  | Calibration Date | Test Date                       | Due Date      | Remark                |
|-----------------------------------|-----------------|----------------------------|-----------------|------------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer                 | Rohde & Schwarz | FSP40                      | 100055          | 9kHz~40GHz       | Jun. 09, 2014    | Nov. 13, 2014~<br>Dec. 24, 2014 | Jun. 08, 2015 | Conducted (TH02-HY)   |
| Power Meter                       | Anritsu         | ML2495A                    | 1036004         | 300MHz~40GHz     | Aug. 09, 2014    | Nov. 13, 2014~<br>Dec. 24, 2014 | Aug. 08, 2015 | Conducted (TH02-HY)   |
| Power Sensor                      | Anritsu         | MA2411B                    | 1027253         | 300MHz~40GHz     | Aug. 09, 2014    | Nov. 13, 2014~<br>Dec. 24, 2014 | Aug. 08, 2015 | Conducted (TH02-HY)   |
| EMI Test Receiver                 | Rohde & Schwarz | ESCI 7                     | 100724          | 9 kHz~7 GHz      | Aug. 30, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Aug. 29, 2015 | Radiation (03CH07-HY) |
| Spectrum Analyzer                 | Rohde & Schwarz | FSV30                      | 101749          | 10Hz ~ 30GHz     | Feb. 10, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Feb. 09, 2015 | Radiation (03CH07-HY) |
| Loop Antenna                      | R&S             | HFH2-Z2                    | 100315          | 9 kHz~30 MHz     | Jul. 28, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Jul. 27, 2015 | Radiation (03CH07-HY) |
| Bilog Antenna                     | Schaffner       | CBL6111C                   | 2726            | 30MHz ~ 1GHz     | Sep. 27, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Sep. 26, 2015 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna         | ESCO            | 3117                       | 75962           | 1GHz~18GHz       | Aug. 19, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Aug. 18, 2015 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna              | SCHWARZBECK     | BBHA 9170                  | BBHA9170<br>251 | 18GHz~40GHz      | Oct. 02, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Oct. 01, 2015 | Radiation (03CH07-HY) |
| Preamplifier                      | COM-POWER       | PA-103A                    | 161241          | 10 MHz ~ 1000MHz | Mar. 17, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Mar. 16, 2015 | Radiation (03CH07-HY) |
| Preamplifier                      | Agilent         | 8449B                      | 3008A023<br>62  | 1 GHz~26.5 GHz   | Oct. 21, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Oct. 20, 2015 | Radiation (03CH07-HY) |
| Preamplifier                      | MITEQ           | AMF-7D-0010<br>1800-30-10P | 1590074         | DC~18 GHz        | Jul. 07, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Jul. 06, 2015 | Radiation (03CH07-HY) |
| Preamplifier                      | MITEQ           | AMF-7D-0010<br>1800-30-10P | 1590075         | DC~18 GHz        | Apr. 21, 2014    | Dec. 18, 2014~<br>Dec. 26, 2014 | Apr. 20, 2015 | Radiation (03CH07-HY) |
| Turn Table                        | ChainTek        | ChainTek<br>3000           | N/A             | 0 ~ 360 degree   | N/A              | Dec. 18, 2014~<br>Dec. 26, 2014 | N/A           | Radiation (03CH07-HY) |
| Antenna Mast                      | ChainTek        | ChainTek<br>3000           | N/A             | N/A              | N/A              | Dec. 18, 2014~<br>Dec. 26, 2014 | N/A           | Radiation (03CH07-HY) |
| EMI Test Receiver                 | Rohde & Schwarz | ESCI 7                     | 100724          | 9kHz~7GHz        | Aug. 30, 2014    | Nov. 28, 2014                   | Aug. 29, 2015 | Conduction (CO05-HY)  |
| LISN<br>(for auxiliary equipment) | Rohde & Schwarz | ENV216                     | 100081          | 9kHz ~ 30MHz     | Dec. 12, 2013    | Nov. 28, 2014                   | Dec. 11, 2014 | Conduction (CO05-HY)  |
| LISN                              | Rohde & Schwarz | ENV216                     | 100080          | 9kHz ~ 30MHz     | Dec. 04, 2013    | Nov. 28, 2014                   | Dec. 03, 2014 | Conduction (CO05-HY)  |
| AC Power Source                   | ChainTek        | APC-1000W                  | N/A             | N/A              | N/A              | Nov. 28, 2014                   | N/A           | Conduction (CO05-HY)  |



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.26 |
|-------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.50 |
|-------------------------------------------------------------------------|------|



## **Appendix A. Conducted Test Results**