

FCC Test Report (Part 24: LTE Band 2)

Report No.: RF161004D09E

FCC ID: HFS-C401U

Test Model: C401U

Received Date: Jan. 12, 2018

Test Date: Mar. 29 ~ Mar. 30, 2018

Issued Date: Mar. 31, 2018

Applicant: QUANTA COMPUTER INC.

Address: 188, WEN HUA 2ND RD., GUISHAN DIST., TAO YUAN CITY 33377,
TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Output Power Measurement	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures	14
4.1.3 Test Setup	15
4.1.4 Test Results	16
4.2 Modulation Characteristics Measurement	30
4.2.1 Limits of Modulation Characteristics	30
4.2.2 Test Procedure	30
4.2.3 Test Setup	30
4.2.4 Test Results	31
4.3 Frequency Stability Measurement	32
4.3.1 Limits of Frequency Stability Measurement	32
4.3.2 Test Procedure	32
4.3.3 Test Setup	32
4.3.4 Test Results	33
4.4 Occupied Bandwidth Measurement	34
4.4.1 Test Procedure	34
4.4.2 Test Setup	34
4.4.3 Test Result	35
4.5 Band Edge Measurement	40
4.5.1 Limits of Band Edge Measurement	40
4.5.2 Test Setup	40
4.5.3 Test Procedures	40
4.5.4 Test Results	41
4.6 Peak to Average Ratio	47
4.6.1 Limits of Peak to Average Ratio Measurement	47
4.6.2 Test Setup	47
4.6.3 Test Procedures	47
4.6.4 Test Results	48
4.7 Conducted Spurious Emissions	51
4.7.1 Limits of Conducted Spurious Emissions Measurement	51
4.7.2 Test Setup	51
4.7.3 Test Procedure	51
4.7.4 Test Results	52
4.8 Radiated Emission Measurement	70
4.8.1 Limits of Radiated Emission Measurement	70
4.8.2 Test Procedure	70
4.8.3 Deviation from Test Standard	70
4.8.4 Test Setup	71
4.8.5 Test Results	72

5	Pictures of Test Arrangements.....	90
	Appendix – Information on the Testing Laboratories	91

Release Control Record

Issue No.	Description	Date Issued
RF161004D09E	Original release	Mar. 31, 2018

1 Certificate of Conformity

Product: Clover Flex

Brand: clover

Test Model: C401U

Sample Status: Engineering sample

Applicant: QUANTA COMPUTER INC.

Test Date: Mar. 29 ~ Mar. 30, 2018

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Mar. 31, 2018
Pettie Chen / Senior Specialist

Approved by :  , **Date:** Mar. 31, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective radiated power	Pass	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -21.7dB at 30.97MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY51210137	Jun. 23, 2017	Jun. 22, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	May 11, 2017	May 10, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 12, 2017	Dec. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A01638	Feb. 22, 2018	Feb. 21, 2019
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 15, 2018	Jan. 14, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 07, 2017	Jun. 06, 2018
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Aug. 09, 2017	Aug. 08, 2018
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
4. The IC Site Registration No. is IC 7450F-9.

3 General Information

3.1 General Description of EUT

Product	Clover Flex	
Brand	clover	
Test Model	C401U	
HVIN	C401ULTE	
Sample Status	Engineering sample	
Power Supply Rating	7.6 Vdc (Battery) 12Vdc (Adapter)	
Modulation Type	QPSK, 16QAM	
Operating Frequency	LTE Band 2 (Channel Bandwidth 1.4MHz)	1850.7MHz ~ 1909.3MHz
	LTE Band 2 (Channel Bandwidth 3MHz)	1851.5MHz ~ 1908.5MHz
	LTE Band 2 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1907.5MHz
	LTE Band 2 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1905.0MHz
	LTE Band 2 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1902.5MHz
	LTE Band 2 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1900.0MHz
Max. EIRP Power	Modulation: QPSK	
	LTE Band 2 (Channel Bandwidth 1.4MHz)	229.087mW (23.6dBm)
	LTE Band 2 (Channel Bandwidth 3MHz)	229.087mW (23.6dBm)
	LTE Band 2 (Channel Bandwidth 5MHz)	218.776mW (23.4dBm)
	LTE Band 2 (Channel Bandwidth 10MHz)	229.087mW (23.6dBm)
	LTE Band 2 (Channel Bandwidth 15MHz)	218.776mW (23.4dBm)
	LTE Band 2 (Channel Bandwidth 20MHz)	223.872mW (23.5dBm)
	Modulation: 16QAM	
	LTE Band 2 (Channel Bandwidth 1.4MHz)	181.970mW (22.6dBm)
	LTE Band 2 (Channel Bandwidth 3MHz)	181.970mW (22.6dBm)
	LTE Band 2 (Channel Bandwidth 5MHz)	177.828mW (22.5dBm)
	LTE Band 2 (Channel Bandwidth 10MHz)	181.970mW (22.6dBm)
	LTE Band 2 (Channel Bandwidth 15MHz)	181.970mW (22.6dBm)
	LTE Band 2 (Channel Bandwidth 20MHz)	173.780mW (22.4dBm)
Emission Designator	Modulation: QPSK	
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth 3MHz)	2M70G7D
	LTE Band 2 (Channel Bandwidth 5MHz)	4M47G7D
	LTE Band 2 (Channel Bandwidth 10MHz)	8M95G7D
	LTE Band 2 (Channel Bandwidth 15MHz)	13M5G7D
	LTE Band 2 (Channel Bandwidth 20MHz)	18M1G7D
	Modulation: 16QAM	
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1M09W7D
	LTE Band 2 (Channel Bandwidth 3MHz)	2M69W7D
	LTE Band 2 (Channel Bandwidth 5MHz)	4M47W7D
	LTE Band 2 (Channel Bandwidth 10MHz)	8M98W7D
	LTE Band 2 (Channel Bandwidth 15MHz)	13M5W7D
	LTE Band 2 (Channel Bandwidth 20MHz)	18M1W7D

Antenna Type	Refer to Note for more details
Antenna Connector	Refer to Note for more details
Accessory Device	Charging Dock (Brand: Clover, Model: K400) Microhub (Brand: Clover, Model: H400)
Data Cable Supplied	0.8m shielded Type-C cable without core

Note:

1. The EUT consumes power from the following battery and adapter.

Battery	
Brand	LG Chem, Ltd.
Model	MPPCLOYJ4
Rating	7.6Vdc, 2170mAh (Typ)


Adapter	
Brand	clover
Model	FSP040-RHBN2 A
Input Power	100-240Vac~, 1.5A, 50-60Hz
Output Power	12.0Vdc / 3.33A
Power Line	1.2m shielded DC cable with one core

2. The EUT uses following antennas.

Antenna	Vendor	Antenna Type	Antenna Connector	Frequency Range (MHz)	Antenna Gain (dBi)
Antenna 1 (Main)	Amphenol	PIFA	NA	LTE Band 2	-2.05
Antenna 1 (Aux.)	Amphenol		IPEX MHF4	LTE Band 2	Rx only
Antenna 2 (Main)	Luxshare-ICT	PIFA	NA	LTE Band 2	-1.8
Antenna 2 (Aux.)	Luxshare-ICT		IPEX MHF4	LTE Band 2	Rx only

*Antenna 2 was the worst for the final test.

3.2 Configuration of System under Test

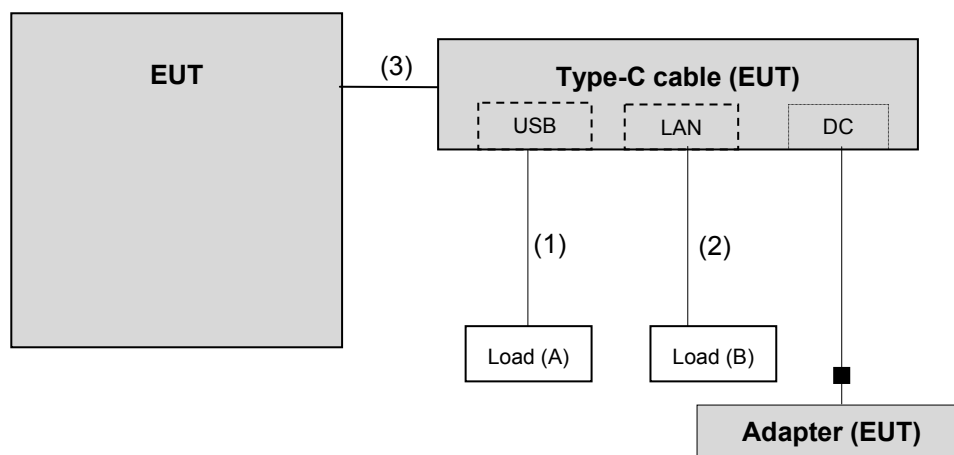

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	N/A	N/A	N/A	N/A	-
B.	Load	N/A	N/A	N/A	N/A	-
C.	Universal Radio Communication Tester	R&S	CMU200	123112	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item C acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.8	N	0	-
2.	LAN cable	1	1.8	N	0	-
3.	Type-C cable	1	0.8	Y	0	Accessory of EUT

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 2

Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK / 16QAM	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK / 16QAM	1 RB / 99 RB Offset
Modulation characteristics	18607 to 19193	18900(1880.00MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
	18700 to 19100	18900(1880.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
Frequency Stability	18607 to 19193	18900(1880.00MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
Occupied Bandwidth	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK / 16QAM	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK / 16QAM	1 RB / 99 RB Offset
Band Edge	18607 to 19193	18607(1850.70MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset 1 RB / 5 RB Offset 6 RB / 0 RB Offset
	18615 to 19185	18615(1851.50MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 0 RB Offset 1 RB / 14 RB Offset 15 RB / 0 RB Offset
	18625 to 19175	18625(1852.50MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
	18650 to 19150	18650(1855.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
	18675 to 19125	18675(1857.50MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
	18700 to 19100	18700(1860.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset

Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Peak to Average Ratio	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK / 16QAM	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK / 16QAM	1 RB / 99 RB Offset
Conducted Emission	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
Radiated Emission Below 1GHz	18607 to 19193	18607(1850.70MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset
Radiated Emission Above 1GHz	18607 to 19193	18607(1850.70MHz), 18900(1880.00MHz), 19193(1909.30MHz)	1.4MHz	QPSK	1 RB / 5 RB Offset
	18615 to 19185	18615(1851.50MHz), 18900(1880.00MHz), 19185(1908.50MHz)	3MHz	QPSK	1 RB / 14 RB Offset
	18625 to 19175	18625(1852.50MHz), 18900(1880.00MHz), 19175(1907.50MHz)	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18650(1855.00MHz), 18900(1880.00MHz), 19150(1905.00MHz)	10MHz	QPSK	1 RB / 49 RB Offset
	18675 to 19125	18675(1857.50MHz), 18900(1880.00MHz), 19125(1902.50MHz)	15MHz	QPSK	1 RB / 74 RB Offset
	18700 to 19100	18700(1860.00MHz), 18900(1880.00MHz), 19100(1900.00MHz)	20MHz	QPSK	1 RB / 99 RB Offset

Note:

1. For radiated emission below 1GHz, the low, mid and high channels were pre-tested in chamber. The low channel was the worst case and chosen for final test.
2. The conducted output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, only occupied bandwidth and Peak to average ratio items had been tested under QPSK and 16QAM modes, the other test items were performed under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Modulation characteristics	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Frequency Stability	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Occupied Bandwidth	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Band Edge	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Peak To Average Ratio	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Conducted Emission	25deg. C, 66%RH	120Vac, 60Hz	James Yang
Radiated Emission	25deg. C, 66%RH	120Vac, 60Hz	James Yang Greg Lin

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

For Radiated Emission below or equal 1GHz

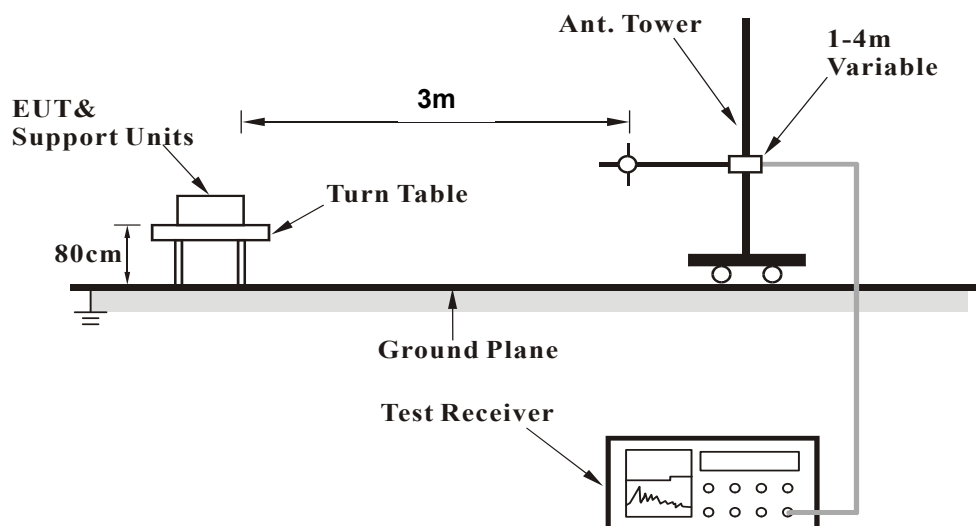

For Radiated Emission above 1GHz

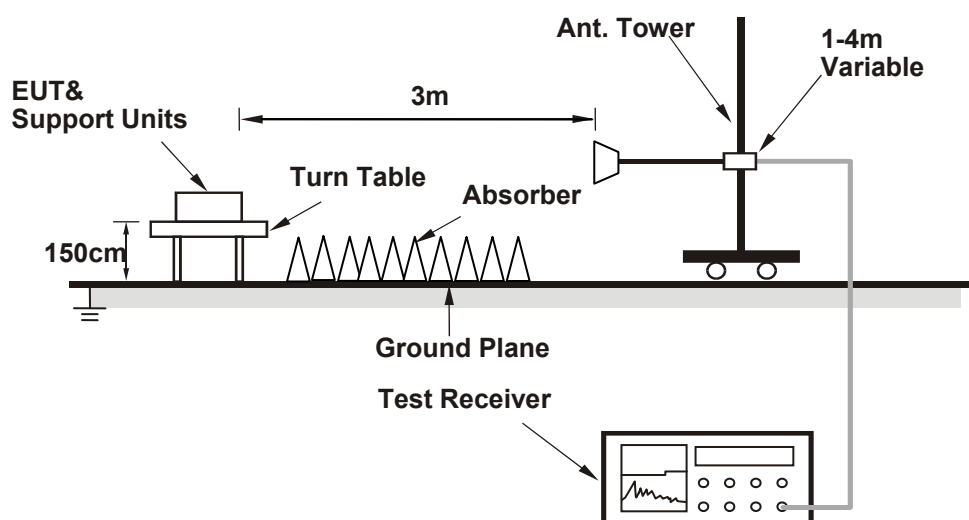

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18607	CH 18900	CH 19193	CH 18607	CH 18900	CH 19193
			1850.7 MHz	1880 MHz	1909.3 MHz	1850.7 MHz	1880 MHz	1909.3 MHz
2 / 1.4MHz	1	0	21.51	21.83	21.74	20.49	20.81	20.72
	1	2	21.29	21.28	21.28	20.27	20.26	20.26
	1	5	21.05	21.02	21.05	20.03	20.00	20.03
	3	0	20.85	20.87	20.57	19.53	19.85	19.55
	3	1	20.53	20.61	20.52	19.52	19.59	19.55
	3	3	20.52	20.58	20.55	19.51	19.56	19.53
	6	0	20.48	20.64	20.43	19.46	19.62	19.41

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18615	CH 18900	CH 19185	CH 18615	CH 18900	CH 19185
			1851.5 MHz	1880 MHz	1908.5 MHz	1851.5 MHz	1880 MHz	1908.5 MHz
2 / 3MHz	1	0	21.58	21.90	21.81	20.56	20.88	20.79
	1	7	21.36	21.35	21.35	20.34	20.33	20.33
	1	14	21.12	21.09	21.12	20.10	20.07	20.10
	8	0	20.52	20.94	20.64	19.50	19.92	19.62
	8	3	20.40	20.68	20.39	19.38	19.66	19.37
	8	7	20.39	20.45	20.32	19.37	19.43	19.30
	15	0	20.55	20.71	20.50	19.53	19.69	19.48

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18625	CH 18900	CH 19175	CH 18625	CH 18900	CH 19175
			1852.5 MHz	1880 MHz	1907.5 MHz	1852.5 MHz	1880 MHz	1907.5 MHz
2 / 5MHz	1	0	21.68	22.00	21.91	20.66	20.98	20.89
	1	12	21.46	21.45	21.45	20.44	20.43	20.43
	1	24	21.22	21.19	21.22	20.20	20.17	20.20
	12	0	20.62	21.04	20.74	19.60	20.02	19.72
	12	6	20.50	20.78	20.49	19.48	19.76	19.47
	12	13	20.49	20.55	20.42	19.47	19.53	19.40
	25	0	20.65	20.81	20.60	19.63	19.79	19.58

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18650	CH 18900	CH 19150	CH 18650	CH 18900	CH 19150
			1855 MHz	1880 MHz	1905 MHz	1855 MHz	1880 MHz	1905 MHz
2 / 10MHz	1	0	21.74	22.06	21.97	20.72	21.04	20.95
	1	24	21.52	21.51	21.51	20.50	20.49	20.49
	1	49	21.28	21.25	21.28	20.26	20.23	20.26
	25	0	20.68	21.10	20.80	19.66	20.08	19.78
	25	12	20.56	20.84	20.55	19.54	19.82	19.53
	25	25	20.55	20.61	20.48	19.53	19.59	19.46
	50	0	20.71	20.87	20.66	19.69	19.85	19.64

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18675	CH 18900	CH 19125	CH 18675	CH 18900	CH 19125
			1857.5 MHz	1880 MHz	1902.5 MHz	1857.5 MHz	1880 MHz	1902.5 MHz
2 / 15MHz	1	0	21.86	22.18	22.09	20.84	21.16	21.07
	1	37	21.64	21.63	21.63	20.62	20.61	20.61
	1	74	21.40	21.37	21.40	20.38	20.35	20.38
	36	0	20.80	21.22	20.92	19.78	20.20	19.90
	36	19	20.68	20.96	20.67	19.66	19.94	19.65
	36	39	20.67	20.73	20.60	19.65	19.71	19.58
	75	0	20.83	20.99	20.78	19.81	19.97	19.76

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 18700	CH 18900	CH 19100	CH 18700	CH 18900	CH 19100
			1860 MHz	1880 MHz	1900 MHz	1860 MHz	1880 MHz	1900 MHz
2 / 20MHz	1	0	21.95	22.27	22.18	20.93	21.25	21.16
	1	50	21.73	21.72	21.72	20.71	20.70	20.70
	1	99	21.49	21.46	21.49	20.47	20.44	20.47
	50	0	20.89	21.31	21.01	19.87	20.29	19.99
	50	25	20.77	21.05	20.76	19.75	20.03	19.74
	50	50	20.76	20.82	20.69	19.74	19.80	19.67
	100	0	20.92	21.08	20.87	19.90	20.06	19.85

EIRP Power (dBm)

Modulation: QPSK

LTE Band 2, Channel Bandwidth: 1.4MHz

MODE		TX channel 18607					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-21.1	19.1	0.1	19.2	33.0	-13.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-17.3	23.1	0.1	23.2	33.0	-9.8

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-21.1	19.4	0.0	19.4	33.0	-13.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.0	23.6	0.0	23.6	33.0	-9.4

MODE		TX channel 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-23.1	17.6	-0.1	17.5	33.0	-15.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-17.6	23.2	-0.1	23.1	33.0	-9.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 3MHz

MODE		TX channel 18615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-21.5	18.7	0.1	18.8	33.0	-14.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-17.7	22.7	0.1	22.8	33.0	-10.2

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-22.3	18.2	0.0	18.2	33.0	-14.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.0	23.6	0.0	23.6	33.0	-9.4

MODE		TX channel 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-22.4	18.3	-0.1	18.2	33.0	-14.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-17.6	23.2	-0.1	23.1	33.0	-9.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 5MHz

MODE		TX channel 18625					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-20.7	19.5	0.1	19.6	33.0	-13.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-17.5	22.9	0.1	23.0	33.0	-10.0

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-22.3	18.2	0.0	18.2	33.0	-14.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.3	23.3	0.0	23.3	33.0	-9.7

MODE		TX channel 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-22.9	17.8	-0.1	17.7	33.0	-15.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-17.3	23.5	-0.1	23.4	33.0	-9.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 10MHz

MODE		TX channel 18650					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-22.0	18.3	0.0	18.3	33.0	-14.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-17.6	22.9	0.0	22.9	33.0	-10.1

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-23.0	17.5	0.0	17.5	33.0	-15.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.0	23.6	0.0	23.6	33.0	-9.4

MODE		TX channel 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-22.6	18.1	-0.1	18.0	33.0	-15.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-18.0	22.8	-0.1	22.7	33.0	-10.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 15MHz

MODE		TX channel 18675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-22.0	18.3	0.0	18.3	33.0	-14.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-17.3	23.2	0.0	23.2	33.0	-9.8

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-22.6	17.9	0.0	17.9	33.0	-15.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.2	23.4	0.0	23.4	33.0	-9.6

MODE		TX channel 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-22.4	18.3	-0.1	18.2	33.0	-14.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-17.9	22.9	-0.1	22.8	33.0	-10.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 20MHz

MODE		TX channel 18700					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-22.6	17.7	0.0	17.7	33.0	-15.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-17.6	22.9	0.0	22.9	33.0	-10.1

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-22.4	18.1	0.0	18.1	33.0	-14.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-17.1	23.5	0.0	23.5	33.0	-9.5

MODE		TX channel 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-22.6	18.1	-0.1	18.0	33.0	-15.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-17.6	23.2	-0.1	23.1	33.0	-9.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation: 16QAM

LTE Band 2, Channel Bandwidth: 1.4MHz

MODE		TX channel 18607					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-21.9	18.3	0.1	18.4	33.0	-14.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-18.2	22.2	0.1	22.3	33.0	-10.7

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-22.1	18.4	0.0	18.4	33.0	-14.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.0	22.6	0.0	22.6	33.0	-10.4

MODE		TX channel 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-24.0	16.7	-0.1	16.6	33.0	-16.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1909.30	-18.5	22.3	-0.1	22.2	33.0	-10.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 3MHz

MODE		TX channel 18615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-22.3	17.9	0.1	18.0	33.0	-15.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-18.5	21.9	0.1	22.0	33.0	-11.0

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-23.3	17.2	0.0	17.2	33.0	-15.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.0	22.6	0.0	22.6	33.0	-10.4

MODE		TX channel 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-23.2	17.5	-0.1	17.4	33.0	-15.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1908.50	-18.4	22.4	-0.1	22.3	33.0	-10.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 5MHz

MODE		TX channel 18625					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-21.7	18.5	0.1	18.6	33.0	-14.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-18.4	22.0	0.1	22.1	33.0	-10.9

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-23.4	17.1	0.0	17.1	33.0	-15.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.4	22.2	0.0	22.2	33.0	-10.8

MODE		TX channel 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-23.7	17.0	-0.1	16.9	33.0	-16.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1907.50	-18.2	22.6	-0.1	22.5	33.0	-10.5

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 10MHz

MODE		TX channel 18650					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-23.1	17.2	0.0	17.2	33.0	-15.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-18.7	21.8	0.0	21.8	33.0	-11.2

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-24.0	16.5	0.0	16.5	33.0	-16.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.0	22.6	0.0	22.6	33.0	-10.4

MODE		TX channel 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-23.4	17.3	-0.1	17.2	33.0	-15.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1905.00	-18.9	21.9	-0.1	21.8	33.0	-11.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 15MHz

MODE		TX channel 18675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-22.9	17.4	0.0	17.4	33.0	-15.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-18.2	22.3	0.0	22.3	33.0	-10.7

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-23.4	17.1	0.0	17.1	33.0	-15.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.0	22.6	0.0	22.6	33.0	-10.4

MODE		TX channel 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-23.3	17.4	-0.1	17.3	33.0	-15.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1902.50	-18.8	22.0	-0.1	21.9	33.0	-11.1

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth: 20MHz

MODE		TX channel 18700					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-23.6	16.7	0.0	16.7	33.0	-16.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-18.7	21.8	0.0	21.8	33.0	-11.2

MODE		TX channel 18900					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-23.3	17.2	0.0	17.2	33.0	-15.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1880.00	-18.2	22.4	0.0	22.4	33.0	-10.6

MODE		TX channel 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-23.4	17.3	-0.1	17.2	33.0	-15.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1900.00	-18.5	22.3	-0.1	22.2	33.0	-10.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup



4.2.4 Test Results

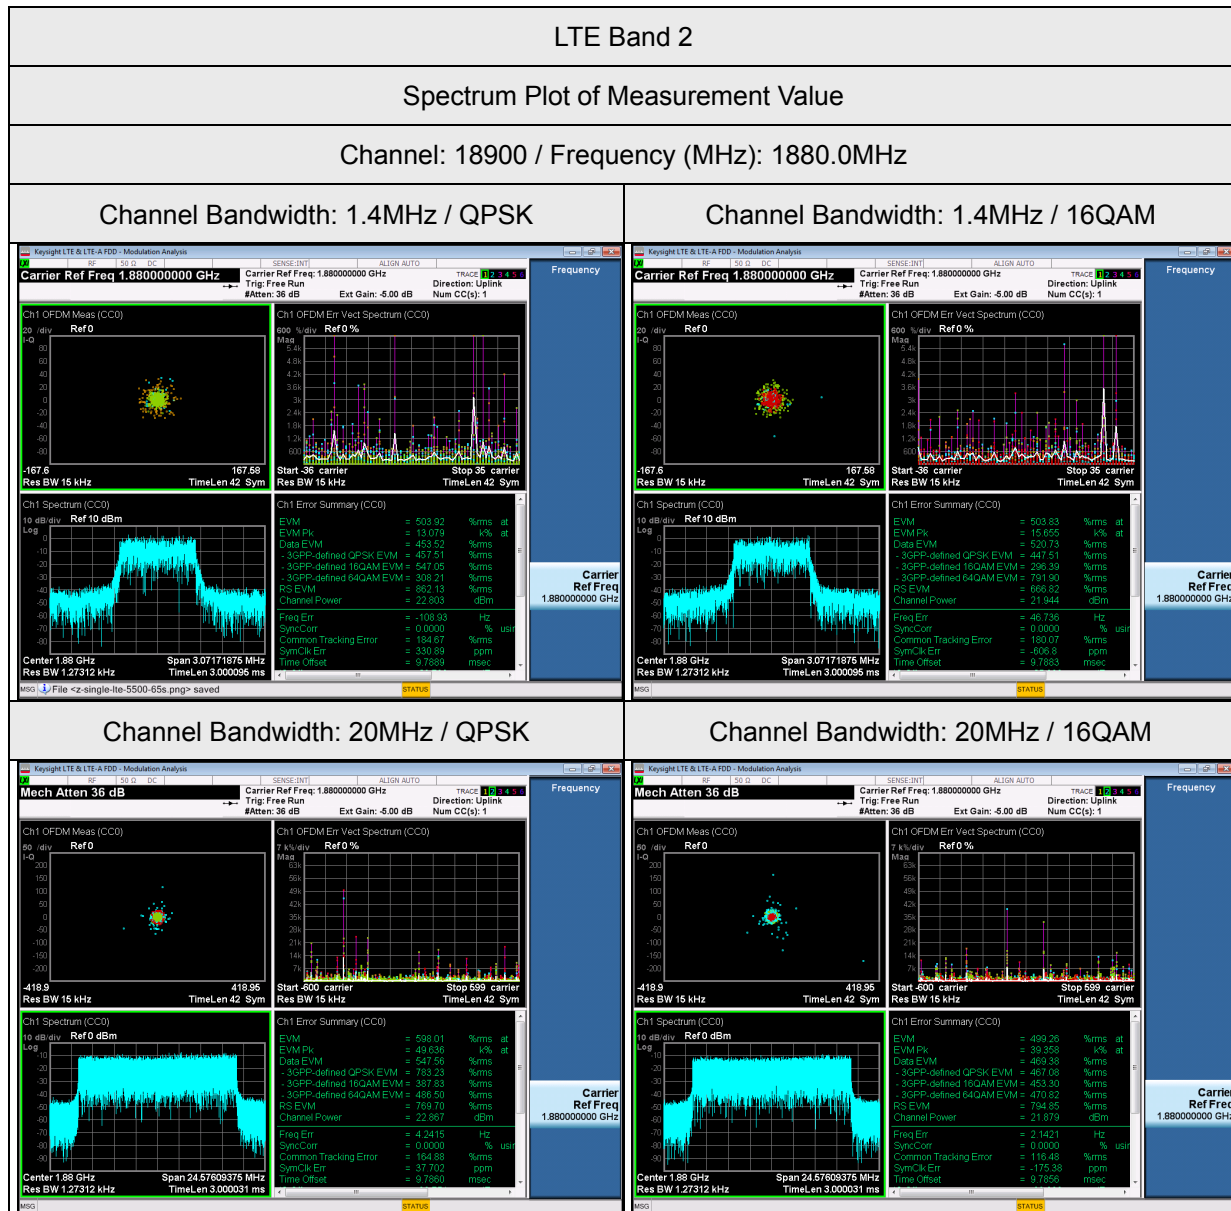

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

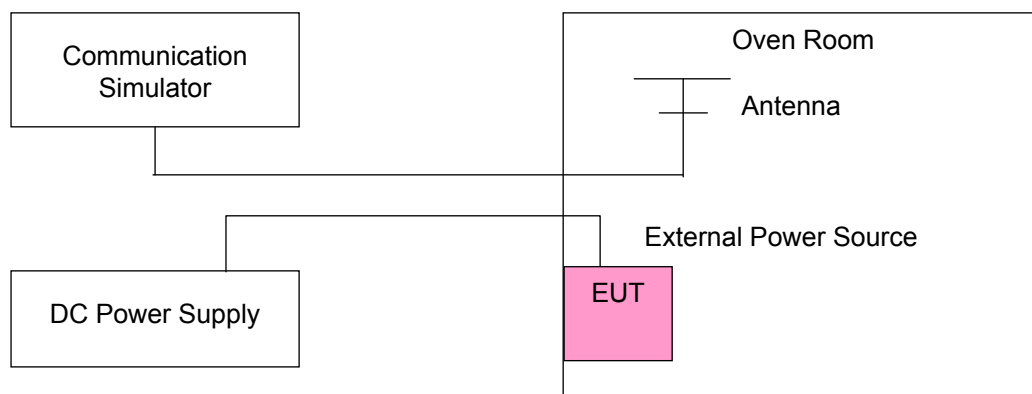

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)	Limit (ppm)
	LTE Band 2	
4.3	-0.005	2.5
3.8	-0.005	2.5
3.6	-0.004	2.5

Note: The applicant defined the normal working voltage is from 3.8Vdc to 4.3Vdc.

Frequency Error vs. Temperature.


Temp. (°C)	Frequency Error (ppm)	Limit (ppm)
	LTE Band 2	
50	-0.006	2.5
40	-0.005	2.5
30	-0.005	2.5
20	-0.005	2.5
10	-0.005	2.5
0	-0.006	2.5
-10	-0.007	2.5
-20	-0.008	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

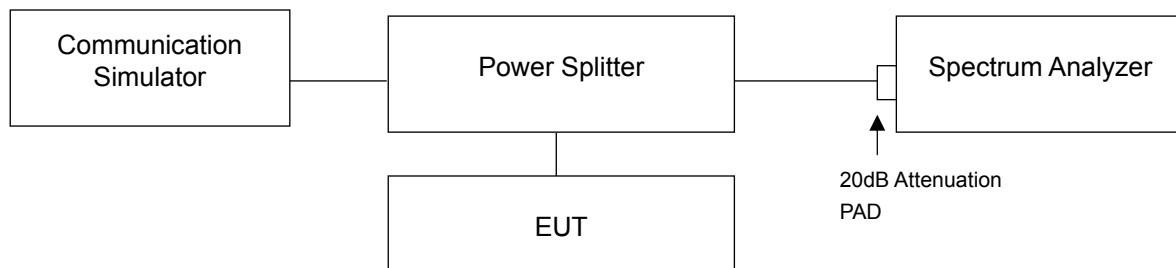

4.4.3 Test Result

26dB Bandwidth

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18607	1850.7	1.235	1.238
18900	1880.0	1.236	1.230
19193	1909.3	1.237	1.243

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18615	1851.5	2.969	2.985
18900	1880.0	2.981	2.959
19185	1908.5	2.971	2.977

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18625	1852.5	4.928	4.941
18900	1880.0	4.978	4.967
19175	1907.5	4.979	4.956

LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18650	1855.0	10.079	9.756
18900	1880.0	9.960	10.067
19150	1905.0	9.985	9.993


LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18675	1857.5	15.351	15.226
18900	1880.0	15.397	15.335
19125	1902.5	15.392	15.567

LTE Band 2, Channel Bandwidth 20MHz


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		QPSK	16QAM
18700	1860.0	20.536	20.556
18900	1880.0	20.820	20.913
19100	1900.0	20.692	20.729

Spectrum Plot of Worst Value


1.4MHz / 16QAM

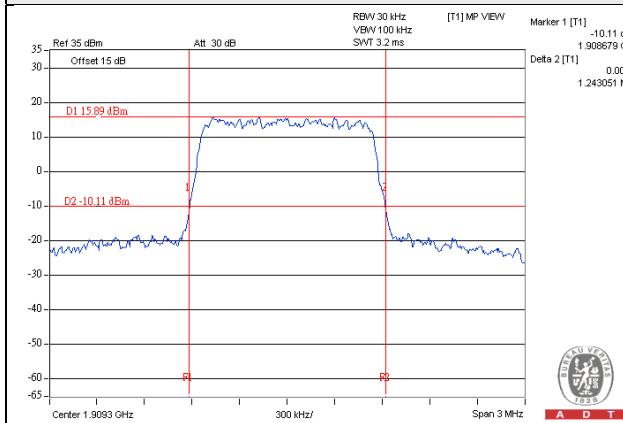


3MHz / 16QAM

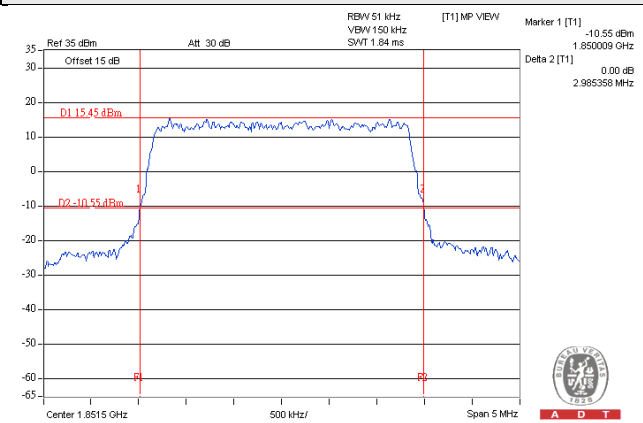


5MHz / QPSK

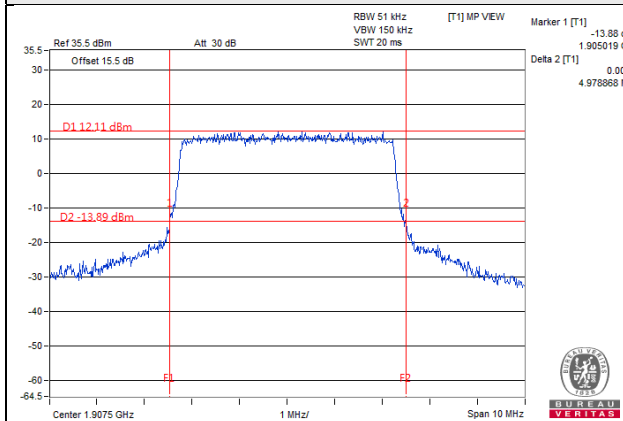


10MHz / QPSK

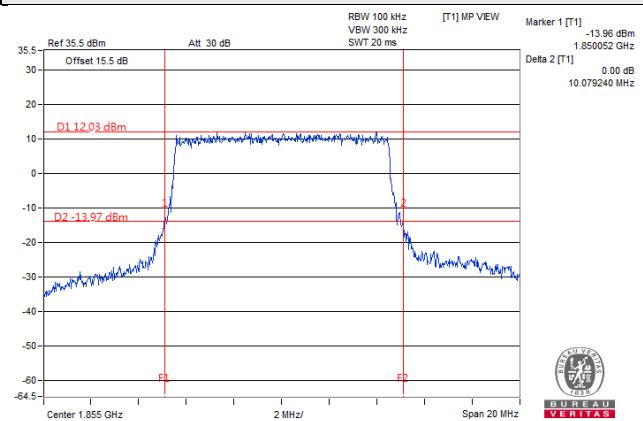

15MHz / 16QAM

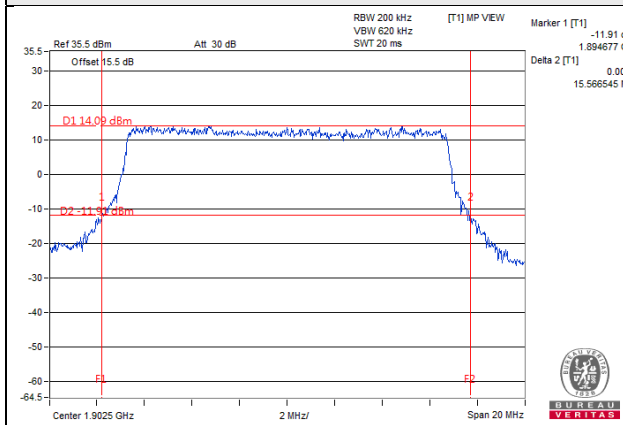

20MHz / 16QAM

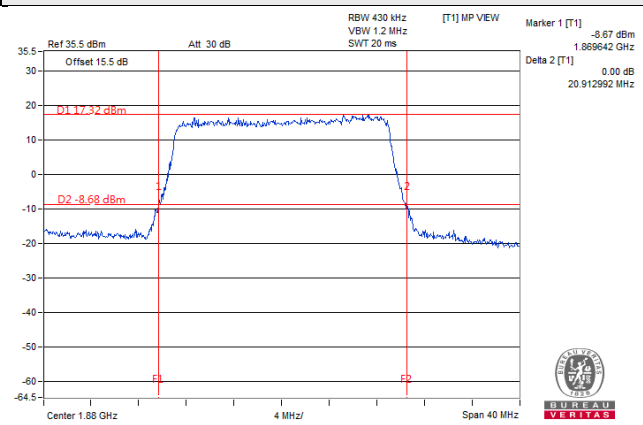

Occupied Bandwidth

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18607	1850.7	1.0892	1.0905
18900	1880.0	1.0894	1.0904
19193	1909.3	1.0912	1.0892

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18615	1851.5	2.6995	2.6971
18900	1880.0	2.7018	2.6967
19185	1908.5	2.7016	2.6978

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18625	1852.5	4.46	4.46
18900	1880.0	4.47	4.46
19175	1907.5	4.47	4.47


LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18650	1855.0	8.95	8.92
18900	1880.0	8.95	8.95
19150	1905.0	8.92	8.98

LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18675	1857.5	13.47	13.44
18900	1880.0	13.53	13.47
19125	1902.5	13.50	13.50


LTE Band 2, Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
18700	1860.0	18.08	18.08
18900	1880.0	18.14	18.14
19100	1900.0	18.14	18.14

Spectrum Plot of Worst Value


1.4MHz / QPSK

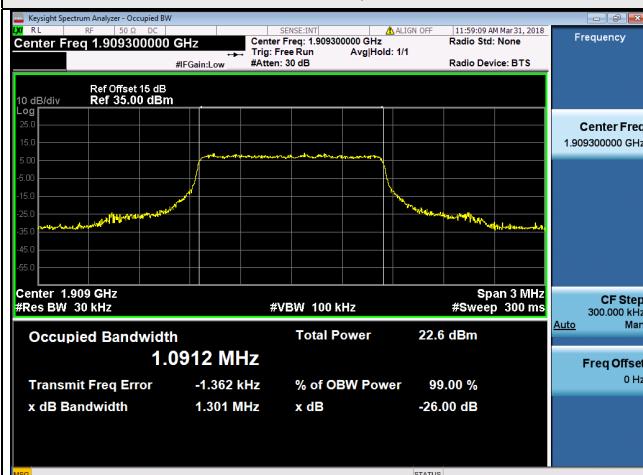


3MHz / QPSK

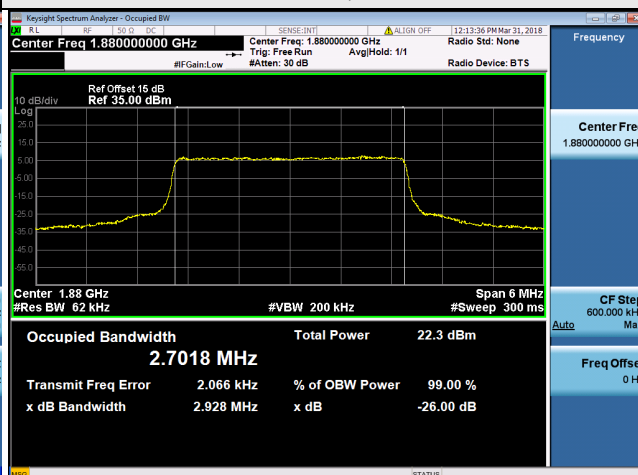


5MHz / QPSK

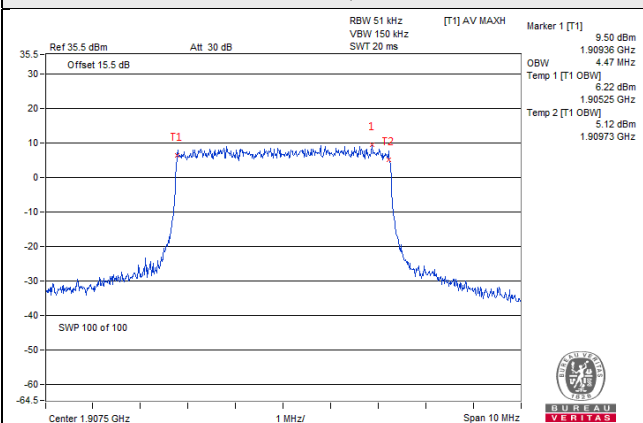


10MHz / 16QAM

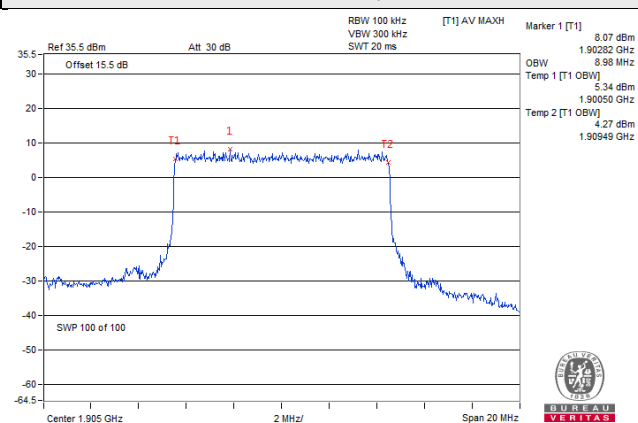

15MHz / QPSK

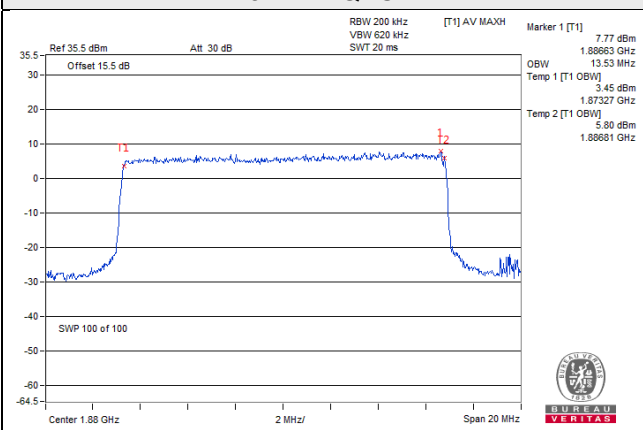

20MHz / 16QAM

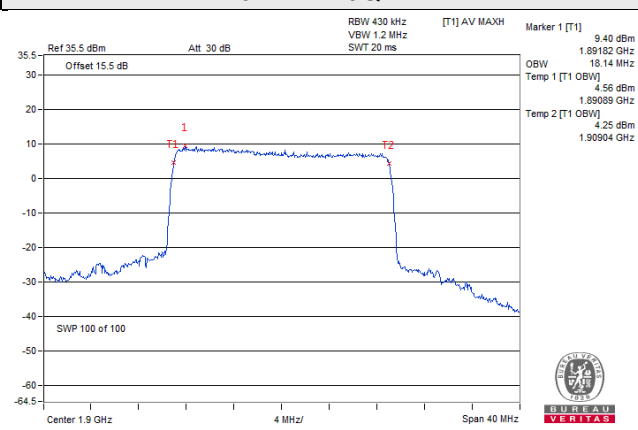


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 Test Setup

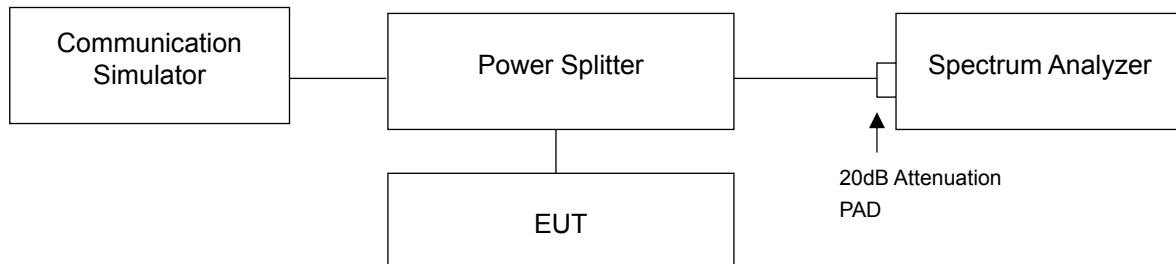


4.5.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Channel Bandwidth 1.4MHz and 3MHz).
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 51kHz and VB of the spectrum is 150kHz (LTE Channel Bandwidth 5MHz).
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Channel Bandwidth 10MHz).
- The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 200kHz and VB of the spectrum is 620kHz (LTE Channel Bandwidth 15MHz).
- The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 430kHz and VB of the spectrum is 1200kHz (LTE Channel Bandwidth 20MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

LTE Band 2, Channel Bandwidth 1.4MHz

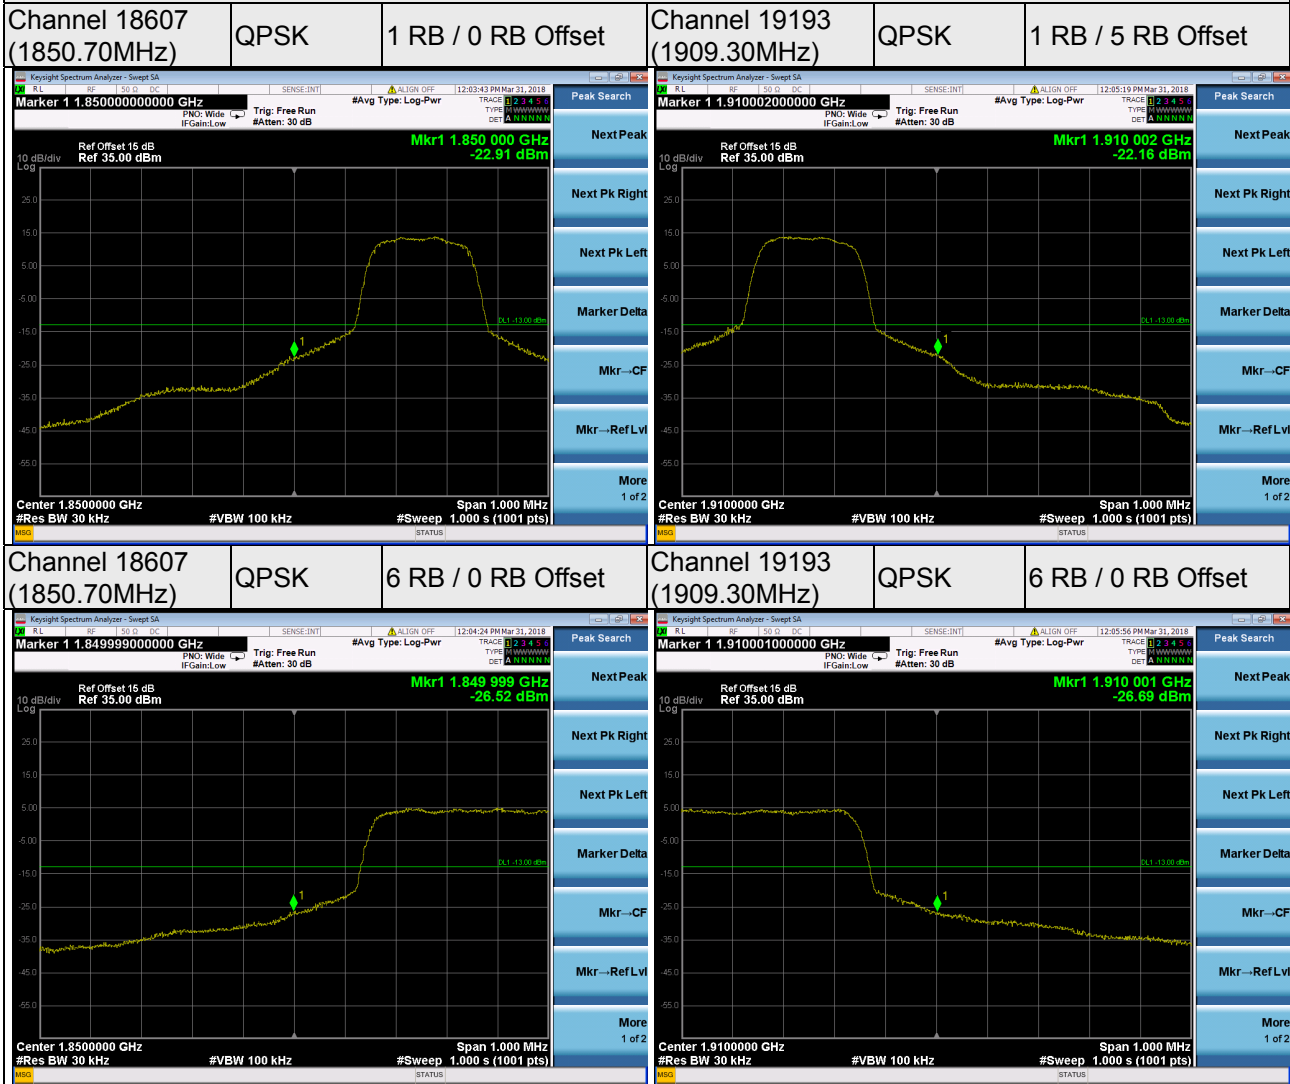


LTE Band 2, Channel Bandwidth 3MHz

Channel 18615 (1851.50MHz)	QPSK	1 RB / 0 RB Offset	Channel 19185 (1908.50MHz)	QPSK	1 RB / 14 RB Offset
-------------------------------	------	--------------------	-------------------------------	------	---------------------


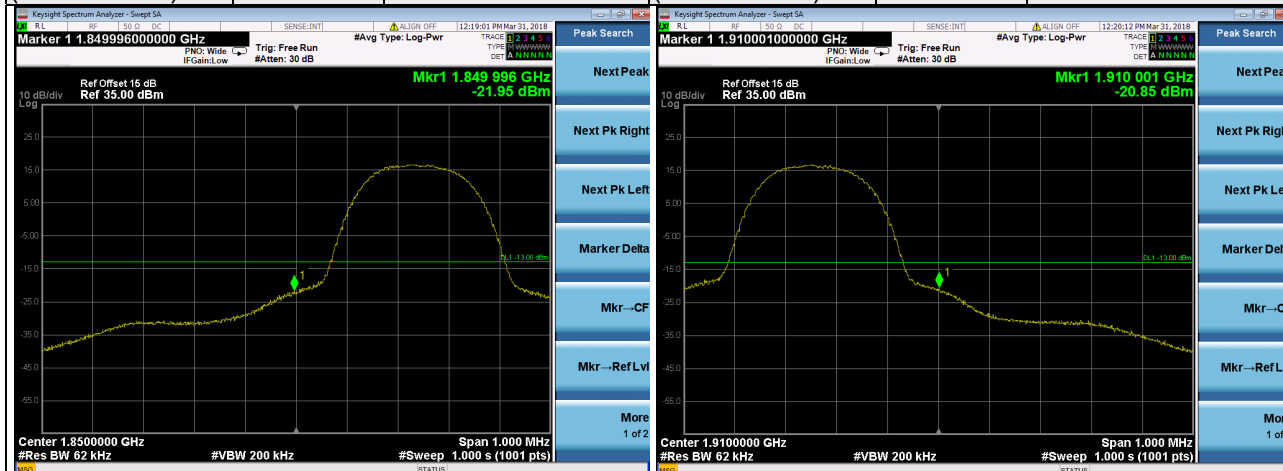


Channel 18615 (1851.50MHz)	QPSK	15 RB / 0 RB Offset	Channel 19185 (1908.50MHz)	QPSK	15 RB / 0 RB Offset
-------------------------------	------	---------------------	-------------------------------	------	---------------------


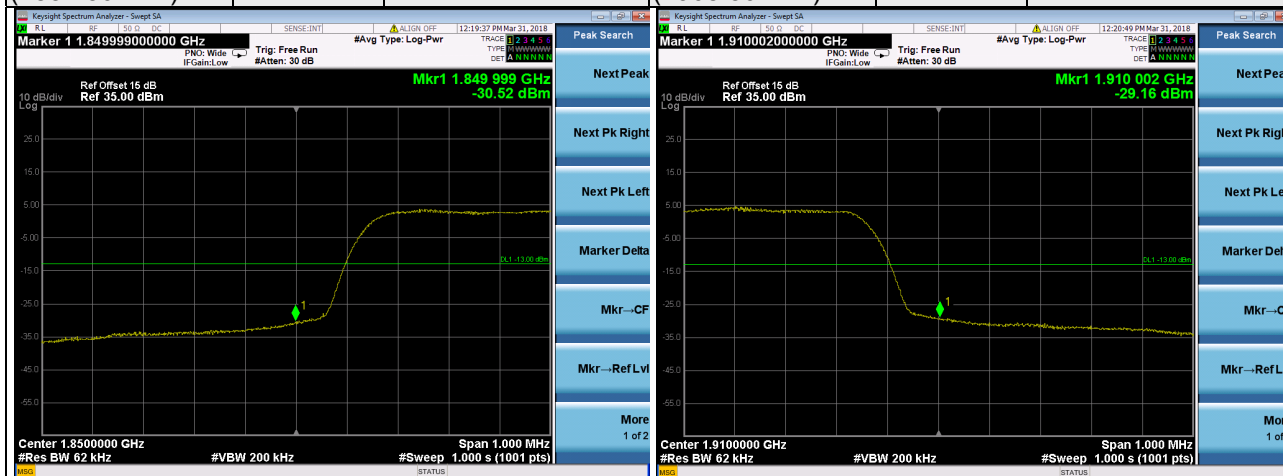


LTE Band 2, Channel Bandwidth 5MHz

Channel 18625 (1852.50MHz)	QPSK	1 RB / 0 RB Offset	Channel 19175 (1907.50MHz)	QPSK	1 RB / 24 RB Offset
-------------------------------	------	--------------------	-------------------------------	------	---------------------

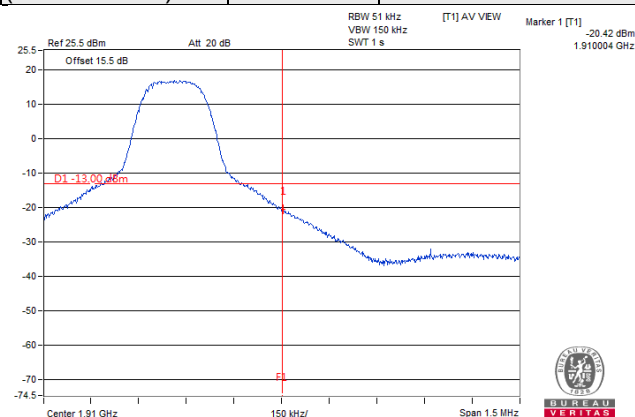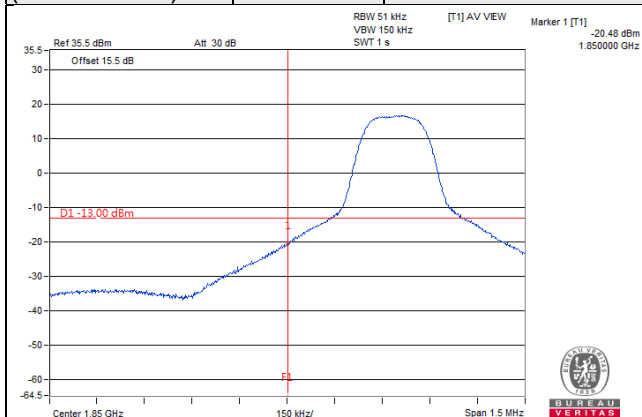


Channel 18625 (1852.50MHz)	QPSK	25 RB / 0 RB Offset	Channel 19175 (1907.50MHz)	QPSK	25 RB / 0 RB Offset
-------------------------------	------	---------------------	-------------------------------	------	---------------------

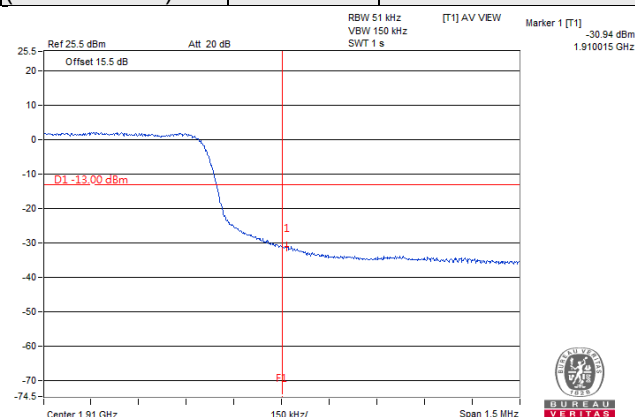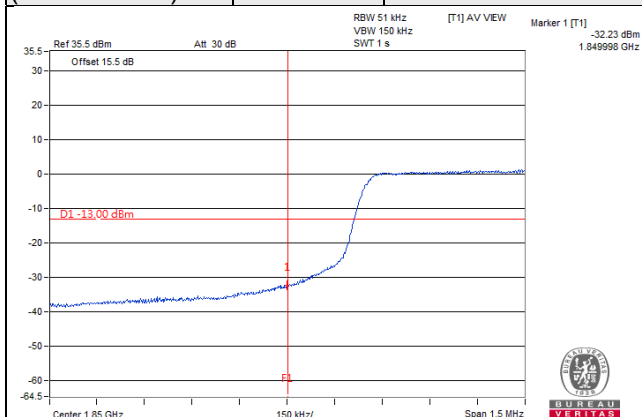


LTE Band 2, Channel Bandwidth 10MHz

Channel 18650 (1855.00MHz)	QPSK	1 RB / 0 RB Offset	Channel 19150 (1905.00MHz)	QPSK	1 RB / 49 RB Offset
-------------------------------	------	--------------------	-------------------------------	------	---------------------


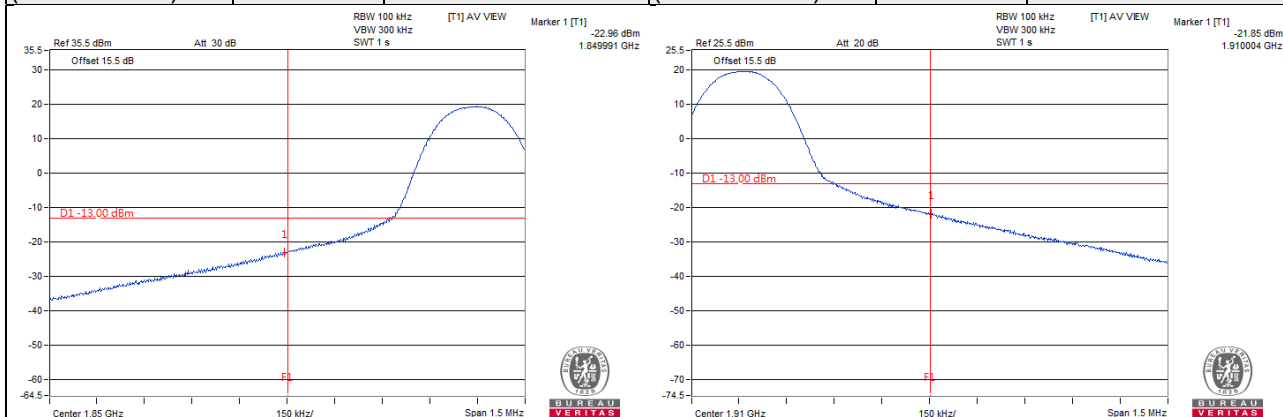


Channel 18650 (1855.00MHz)	QPSK	50 RB / 0 RB Offset	Channel 19150 (1905.00MHz)	QPSK	50 RB / 0 RB Offset
-------------------------------	------	---------------------	-------------------------------	------	---------------------


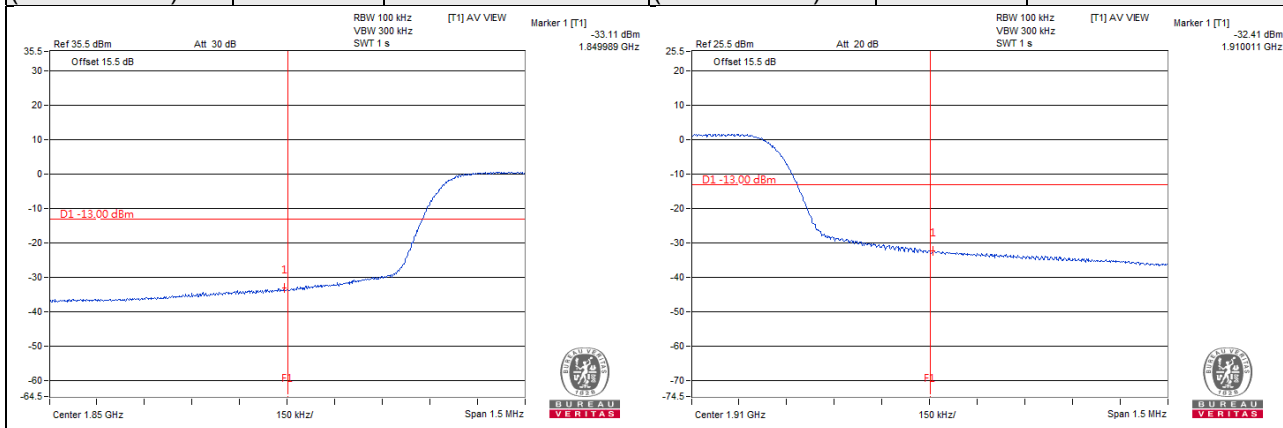


LTE Band 2, Channel Bandwidth 15MHz

Channel 18675 (1857.50MHz)	QPSK	1 RB / 0 RB Offset	Channel 19125 (1902.50MHz)	QPSK	1 RB / 74 RB Offset
-------------------------------	------	--------------------	-------------------------------	------	---------------------

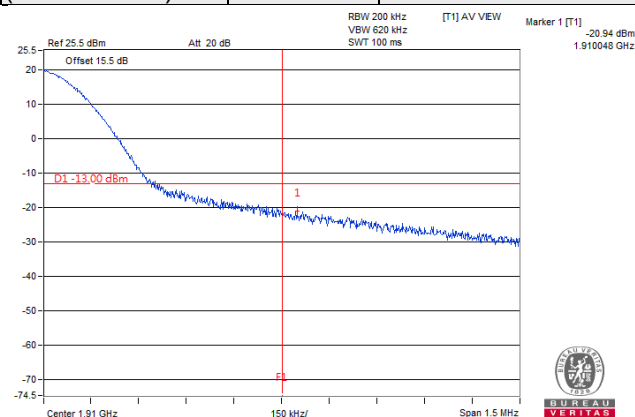
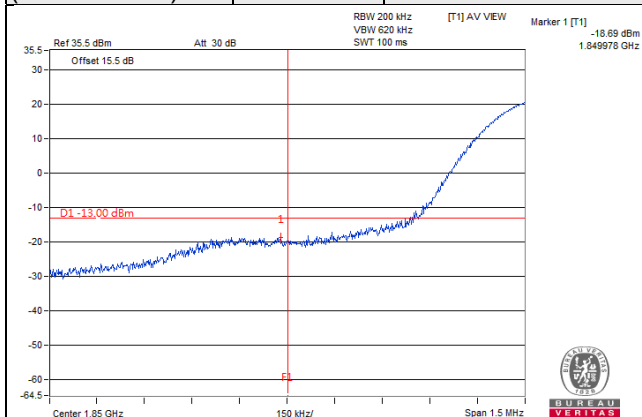


Channel 18675 (1857.50MHz)	QPSK	75 RB / 0 RB Offset	Channel 19125 (1902.50MHz)	QPSK	75 RB / 0 RB Offset
-------------------------------	------	---------------------	-------------------------------	------	---------------------

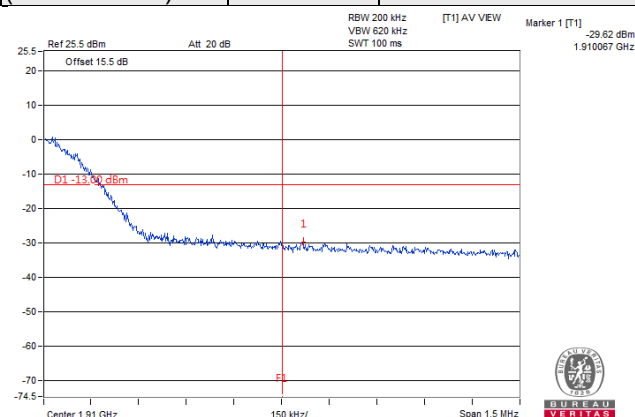
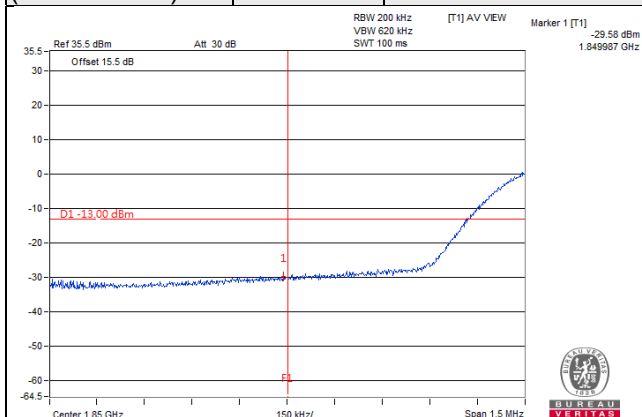


LTE Band 2, Channel Bandwidth 20MHz

Channel 18700 (1860.00MHz)	QPSK	1 RB / 0 RB Offset	Channel 19100 (1900.00 MHz)	QPSK	1 RB / 99 RB Offset
-------------------------------	------	--------------------	--------------------------------	------	---------------------

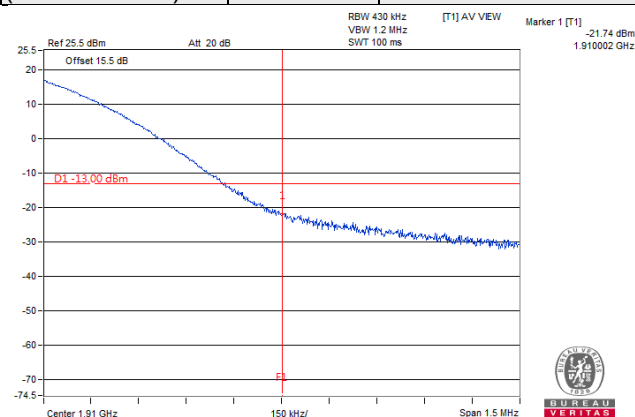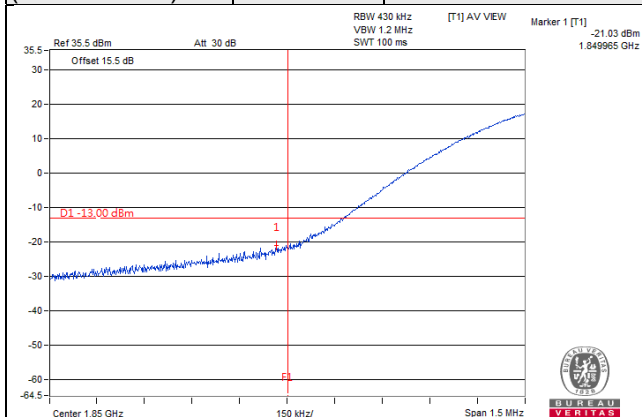

Channel 18700 (1860.00MHz)	QPSK	100 RB / 0 RB Offset	Channel 19100 (1900.00 MHz)	QPSK	100 RB / 0 RB Offset
-------------------------------	------	----------------------	--------------------------------	------	----------------------

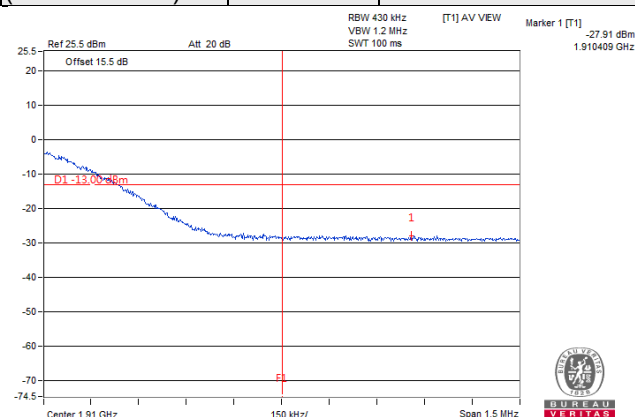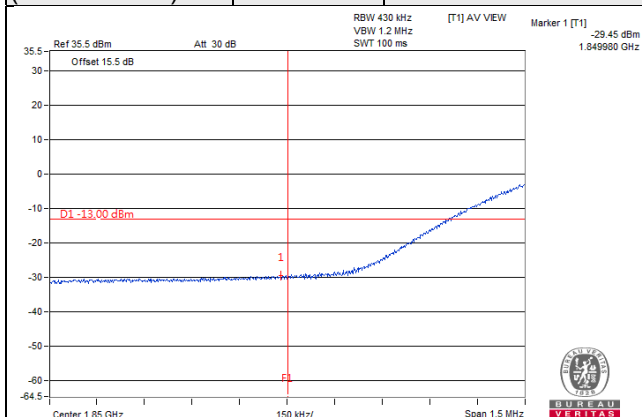


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.6.2 Test Setup

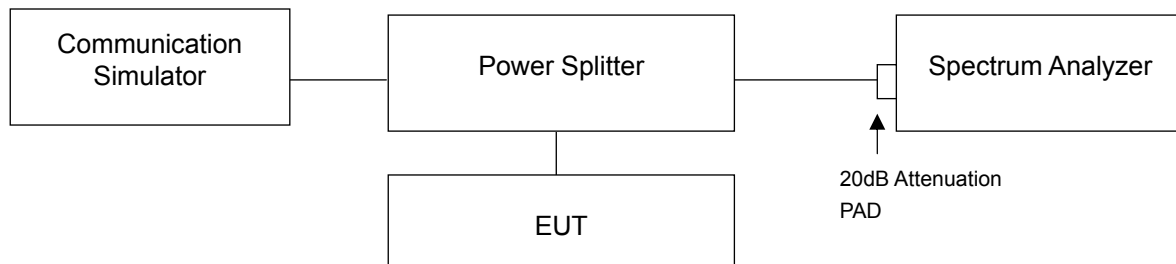

4.6.3 Test Procedures

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.6.4 Test Results

LTE Band 2, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18607	1850.7	5.42	6.36
18900	1880.0	5.74	6.77
19193	1909.3	5.23	6.21

LTE Band 2, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18615	1851.5	5.26	6.09
18900	1880.0	5.50	6.34
19185	1908.5	5.26	6.04

LTE Band 2, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18625	1852.5	5.46	6.32
18900	1880.0	5.66	6.66
19175	1907.5	5.55	6.37


LTE Band 2, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18650	1855.0	5.23	6.18
18900	1880.0	5.59	6.54
19150	1905.0	5.30	6.02

LTE Band 2, Channel Bandwidth 15MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18675	1857.5	5.29	6.27
18900	1880.0	5.55	6.57
19125	1902.5	5.23	5.95


LTE Band 2, Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
18700	1860.0	5.26	6.15
18900	1880.0	5.58	6.62
19100	1900.0	5.29	6.42

Spectrum Plot Of Worst Value


1.4MHz / 16QAM

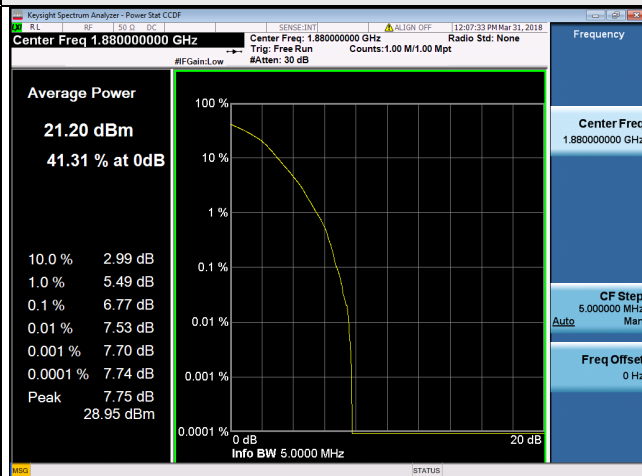


3MHz / 16QAM

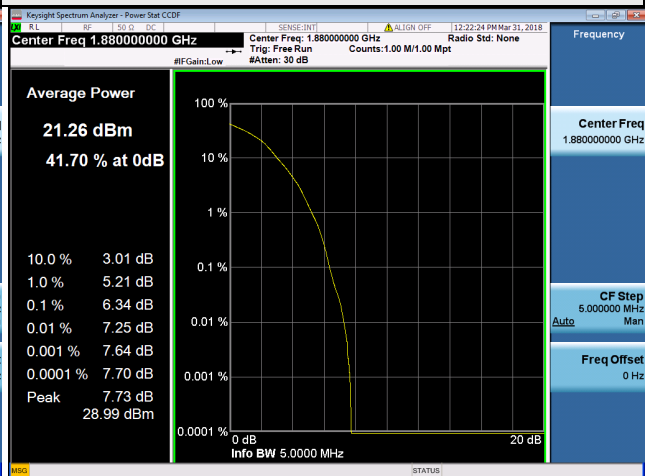


5MHz / 16QAM

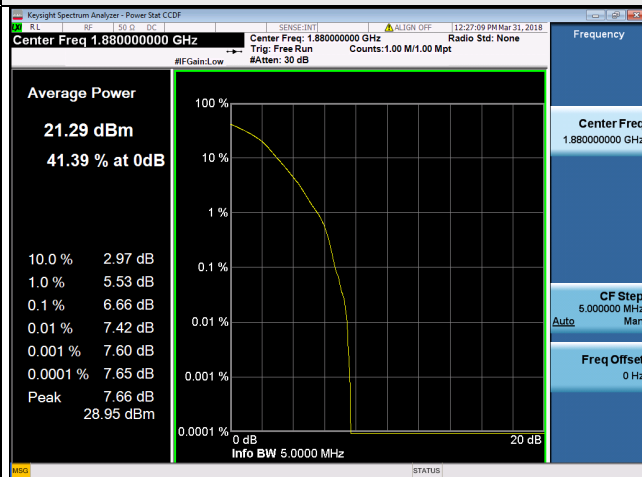


10MHz / 16QAM

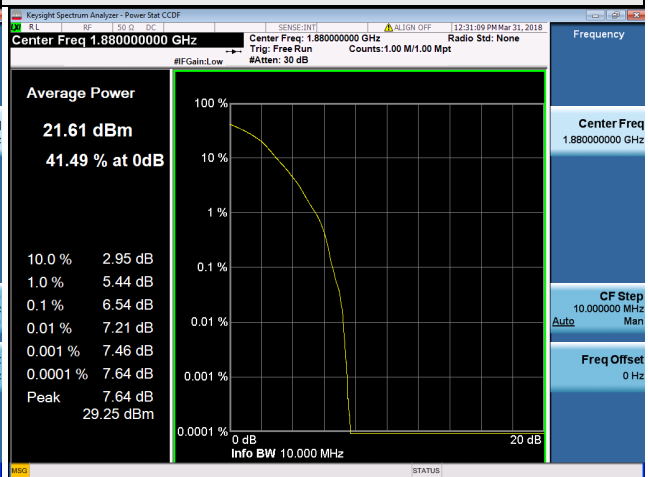

15MHz / 16QAM

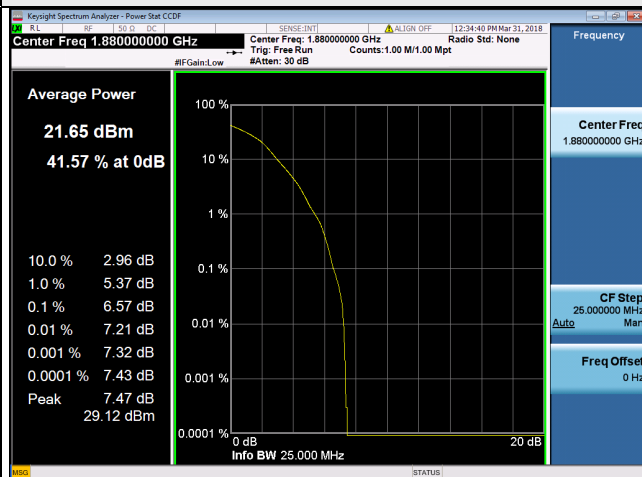

20MHz / 16QAM

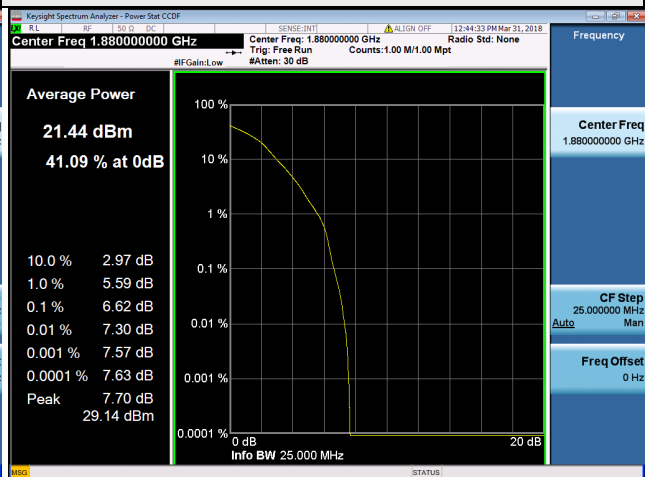


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Setup

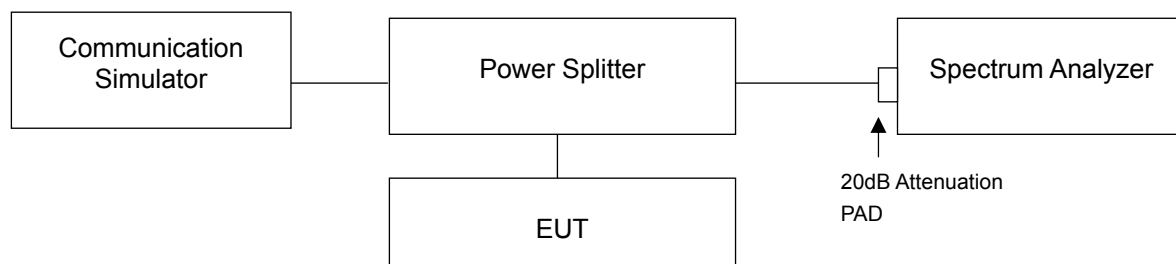

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.



4.7.4 Test Results

LTE Band 2, Channel Bandwidth 1.4MHz


Channel 18607 (1850.70MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

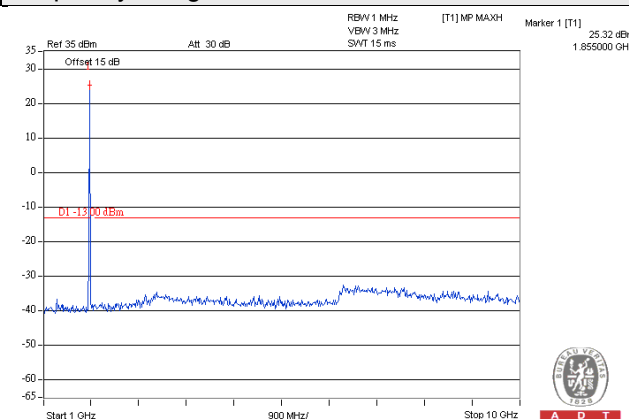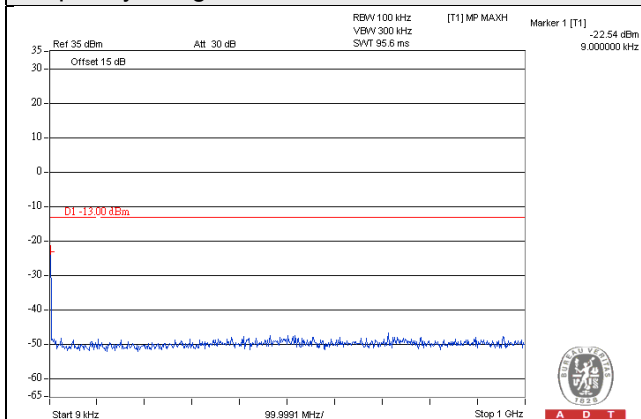

Frequency Range : 10GHz~26.5GHz


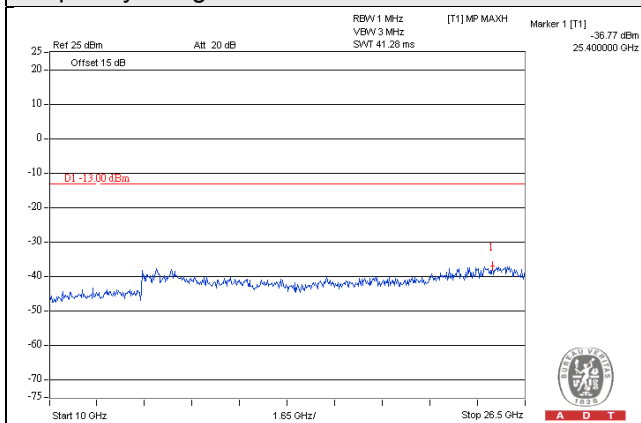


LTE Band 2, Channel Bandwidth 1.4MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

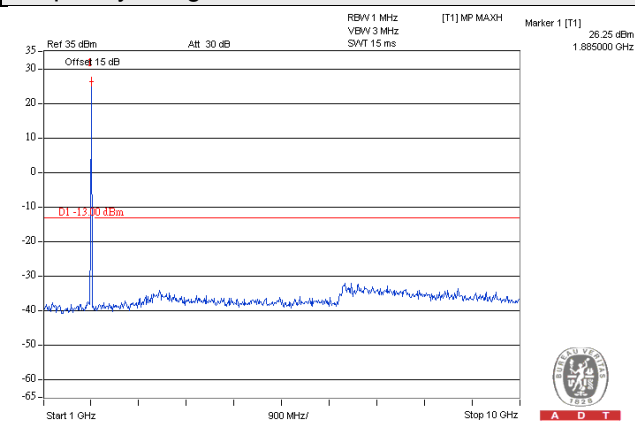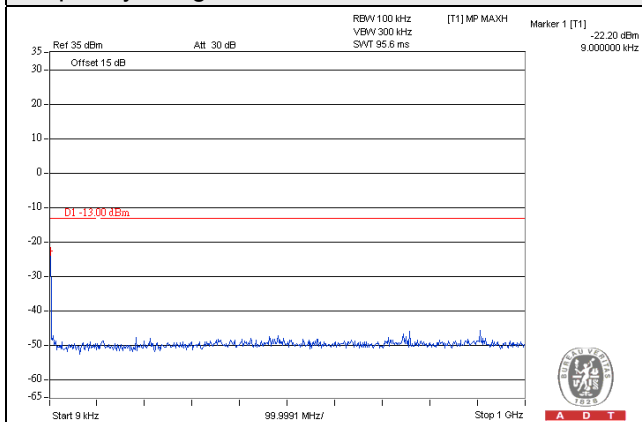

Frequency Range : 10GHz~26.5GHz


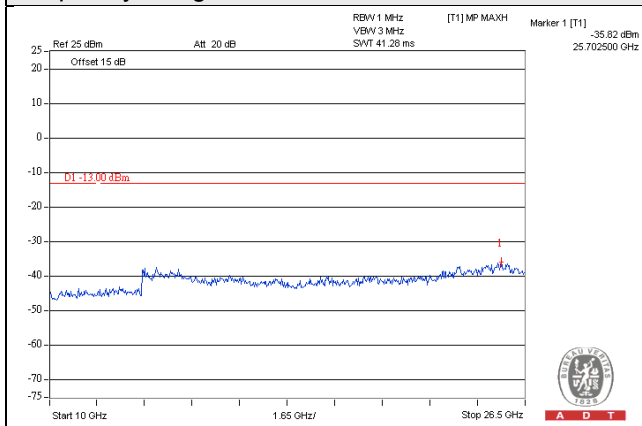


LTE Band 2, Channel Bandwidth 1.4MHz


Channel 19193 (1909.30MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

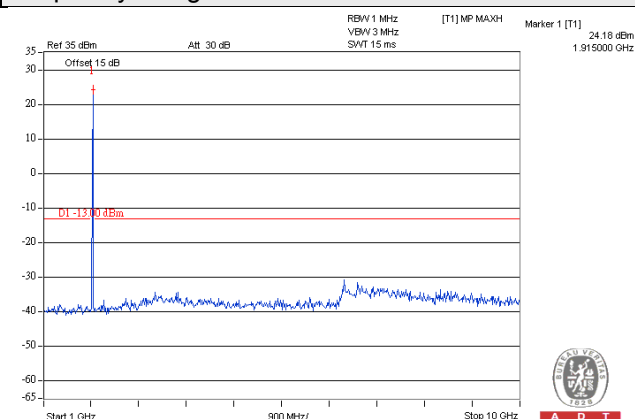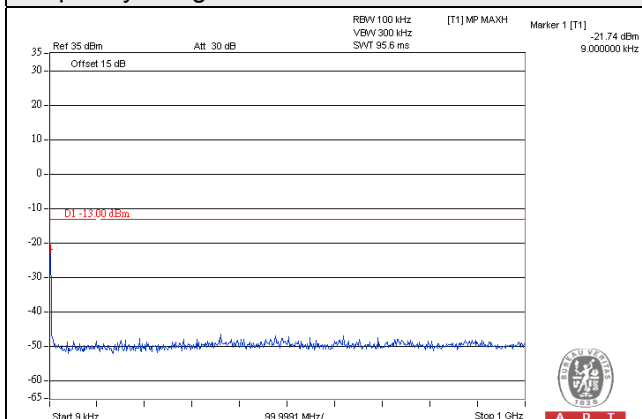

Frequency Range : 10GHz~26.5GHz


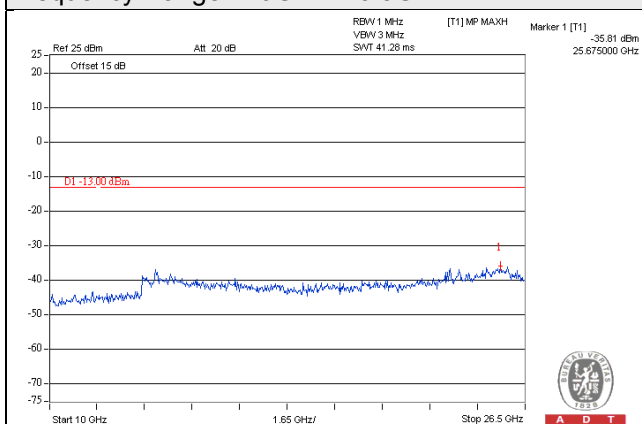


LTE Band 2, Channel Bandwidth 3MHz


Channel 18615 (1851.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

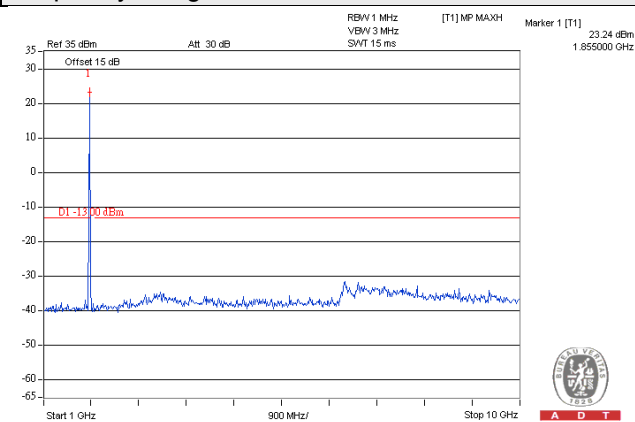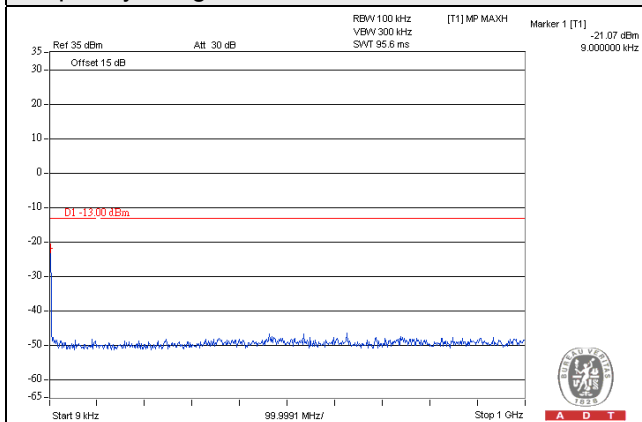

Frequency Range : 10GHz~26.5GHz


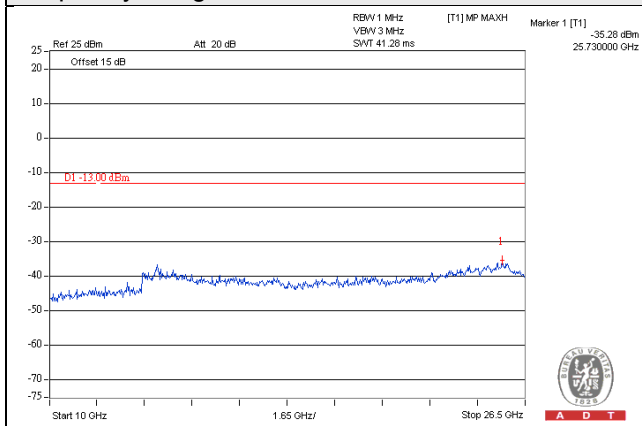


LTE Band 2, Channel Bandwidth 3MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

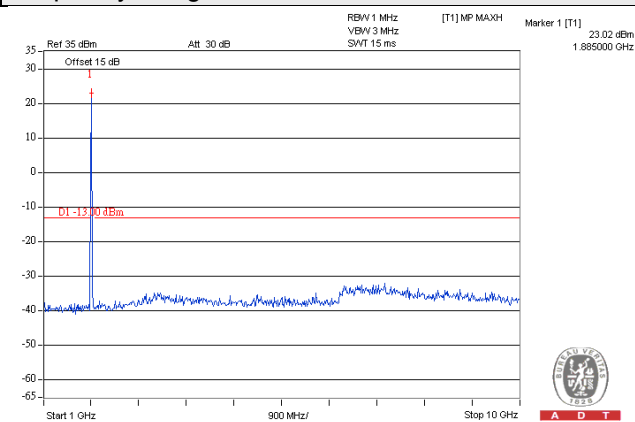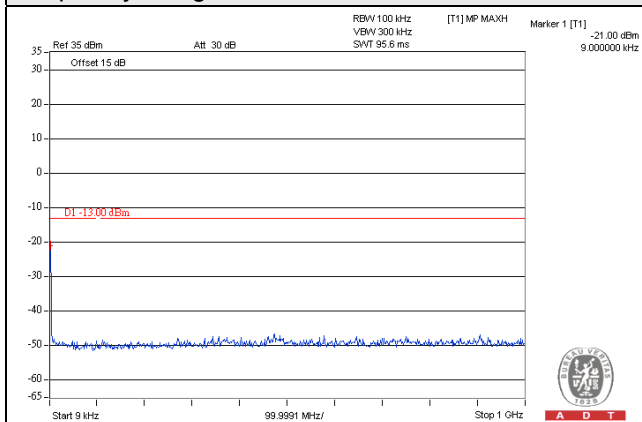

Frequency Range : 10GHz~26.5GHz


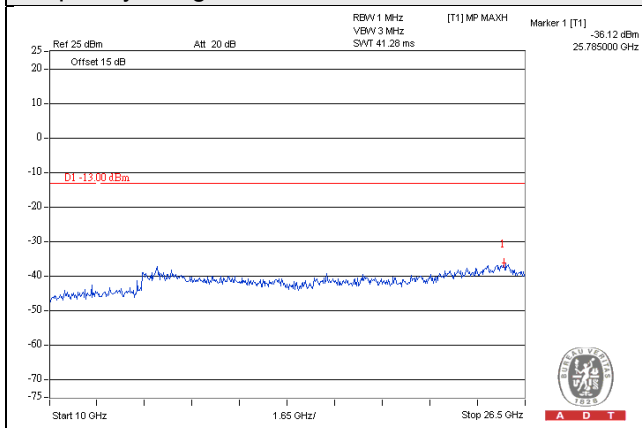


LTE Band 2, Channel Bandwidth 3MHz


Channel 19185 (1908.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

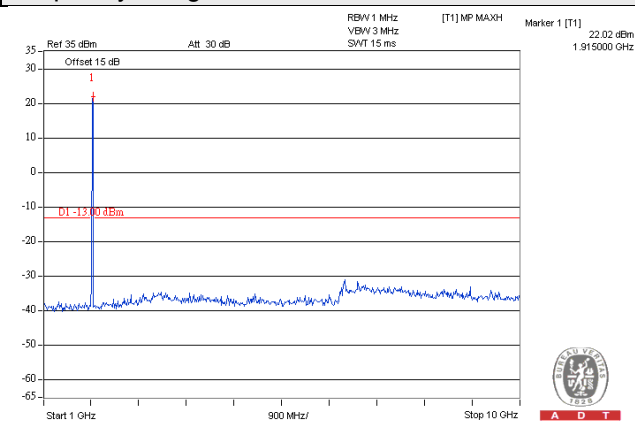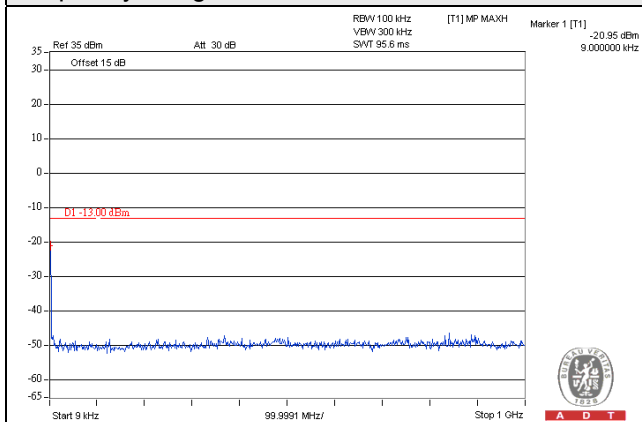

Frequency Range : 10GHz~26.5GHz


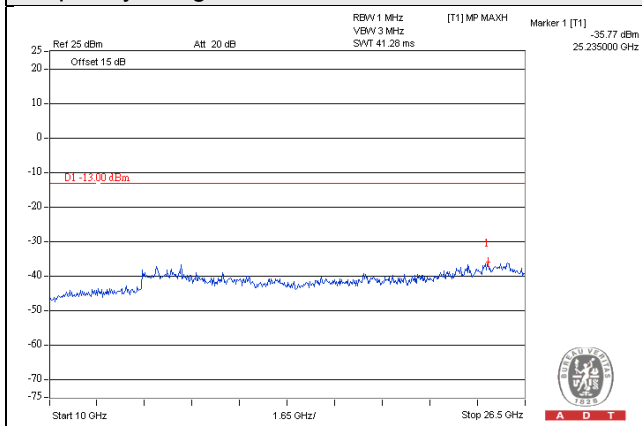


LTE Band 2, Channel Bandwidth 5MHz


Channel 18625 (1852.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

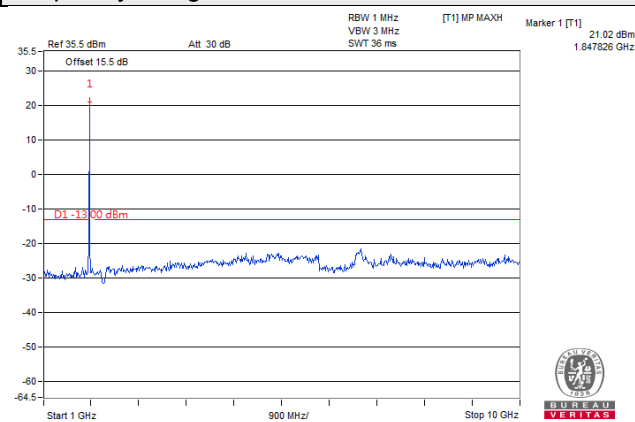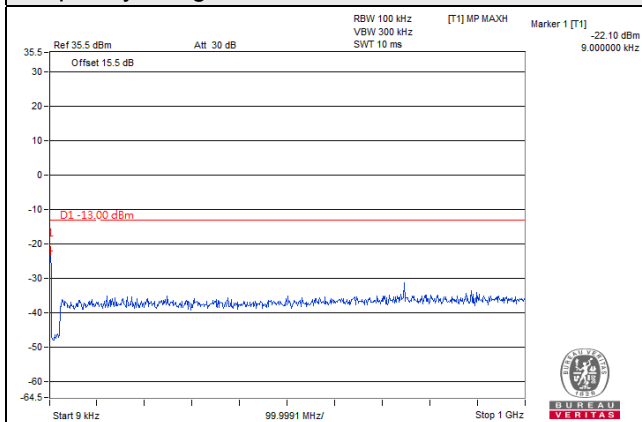

Frequency Range : 10GHz~26.5GHz


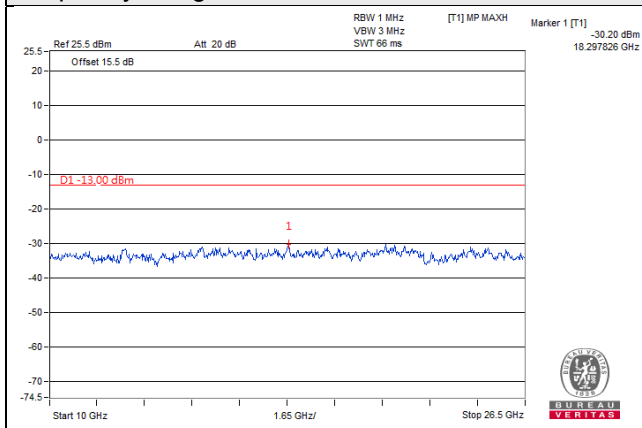


LTE Band 2, Channel Bandwidth 5MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

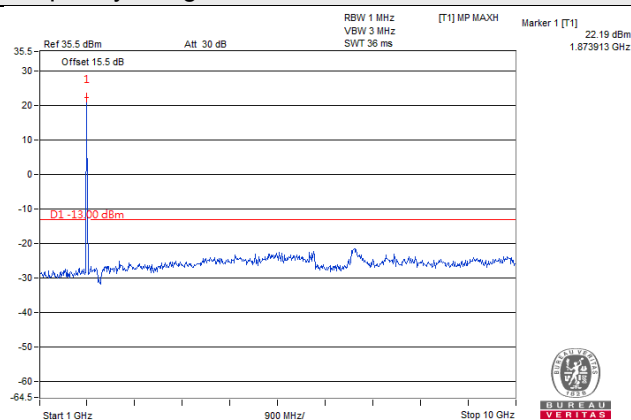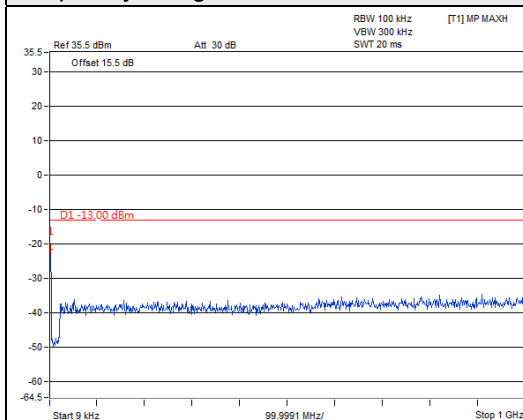

Frequency Range : 10GHz~26.5GHz


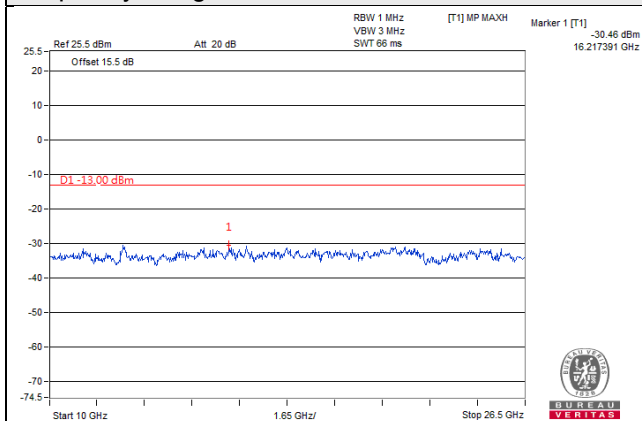


LTE Band 2, Channel Bandwidth 5MHz


Channel 19175 (1907.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

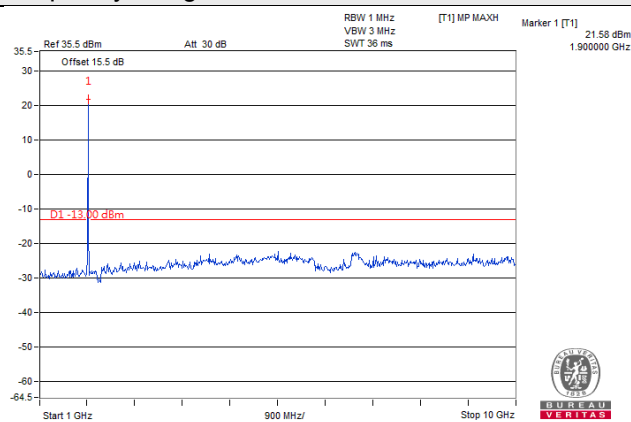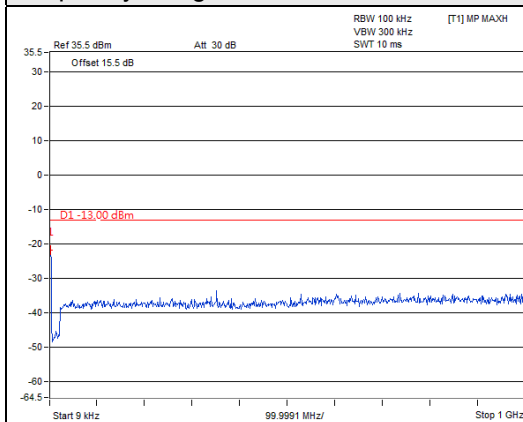

Frequency Range : 10GHz~26.5GHz


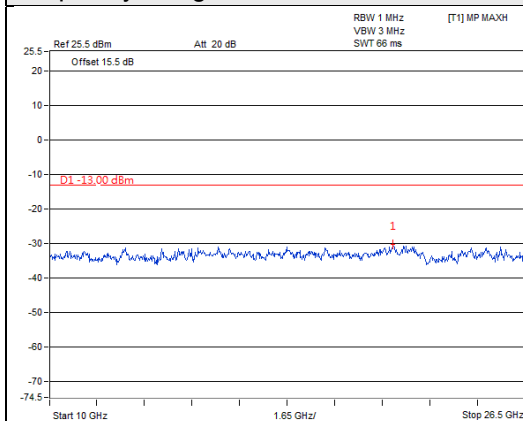


LTE Band 2, Channel Bandwidth 10MHz


Channel 18650 (1855.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

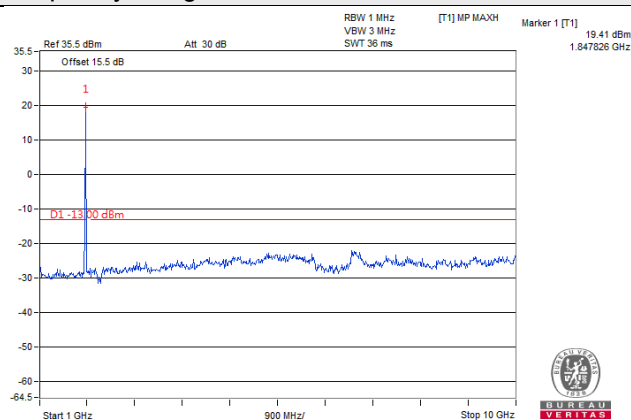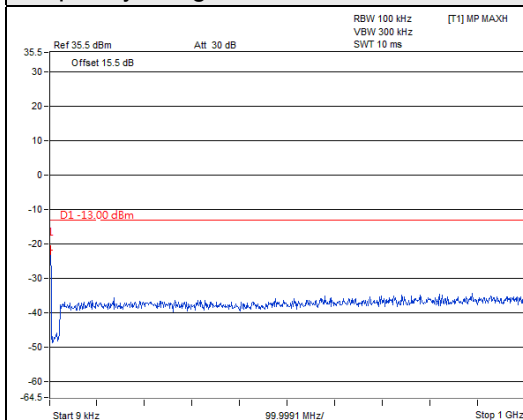

Frequency Range : 10GHz~26.5GHz


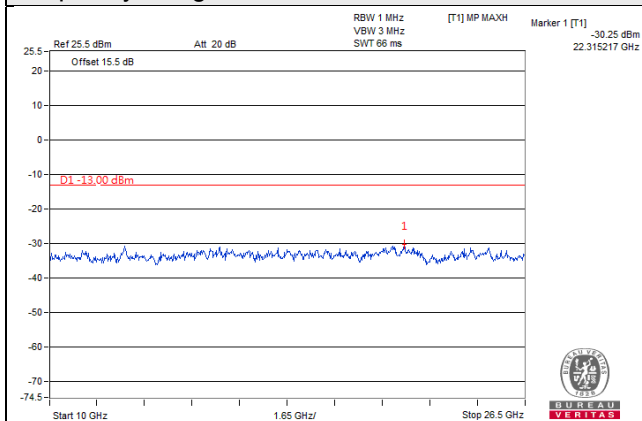


LTE Band 2, Channel Bandwidth 10MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

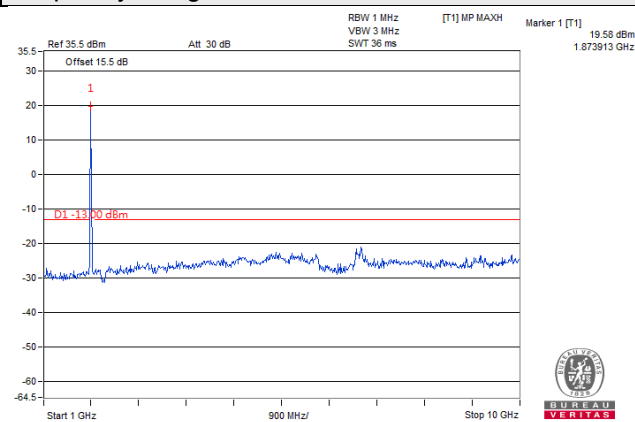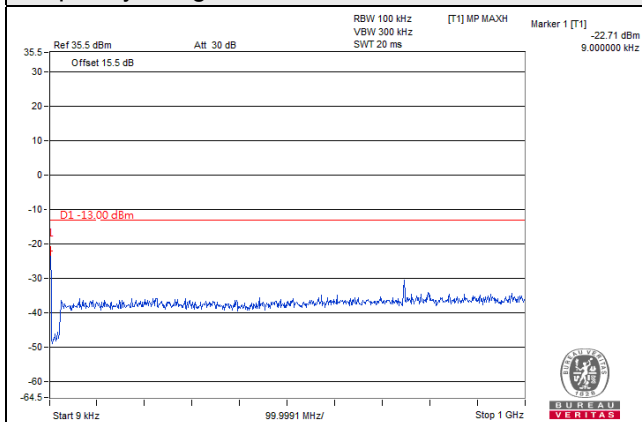

Frequency Range : 10GHz~26.5GHz


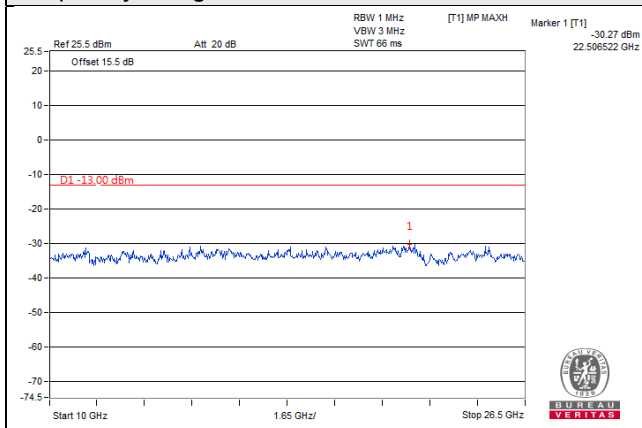


LTE Band 2, Channel Bandwidth 10MHz


Channel 19150 (1905.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

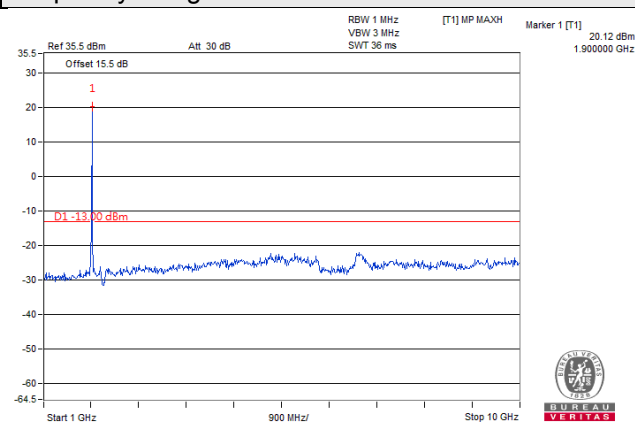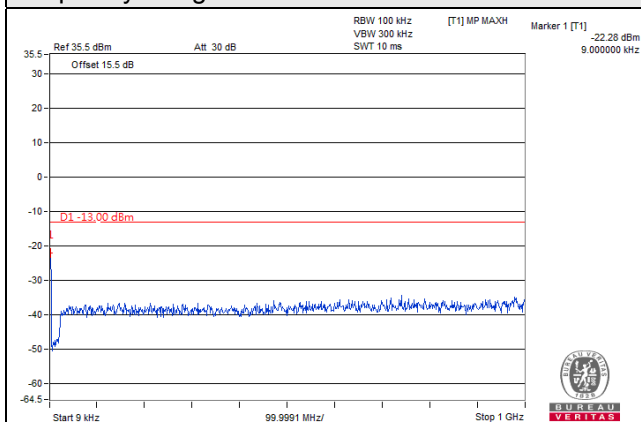

Frequency Range : 10GHz~26.5GHz


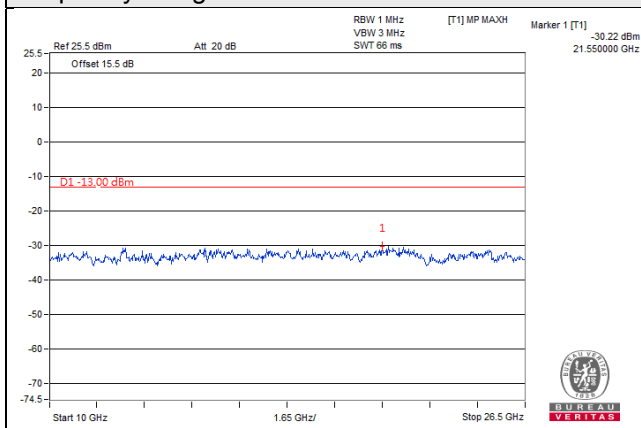


LTE Band 2, Channel Bandwidth 15MHz


Channel 18675 (1857.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

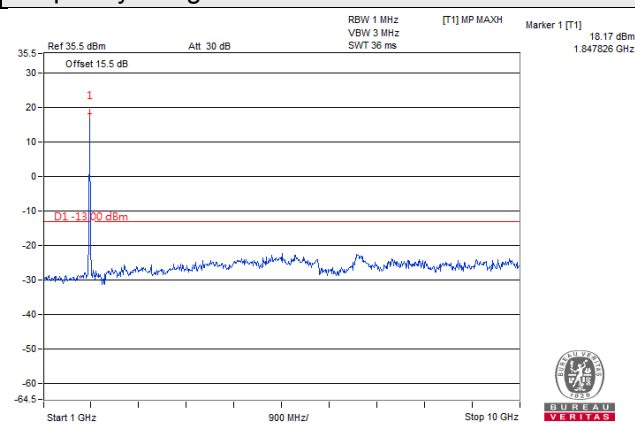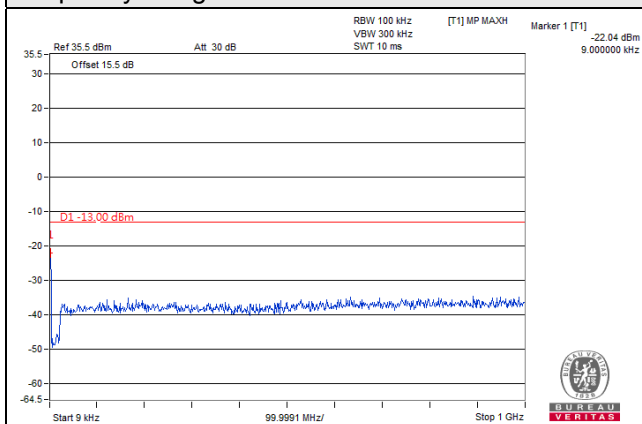

Frequency Range : 10GHz~26.5GHz


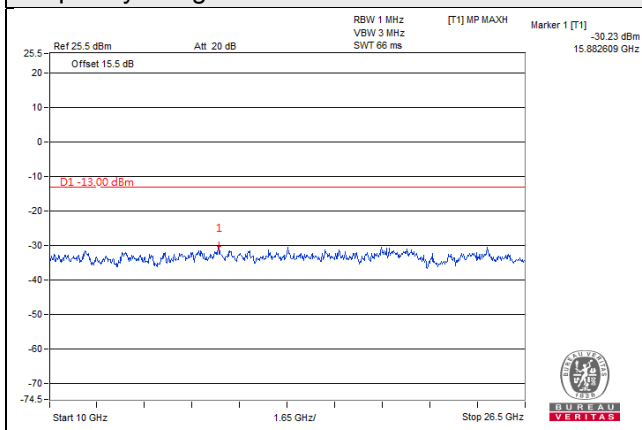


LTE Band 2, Channel Bandwidth 15MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

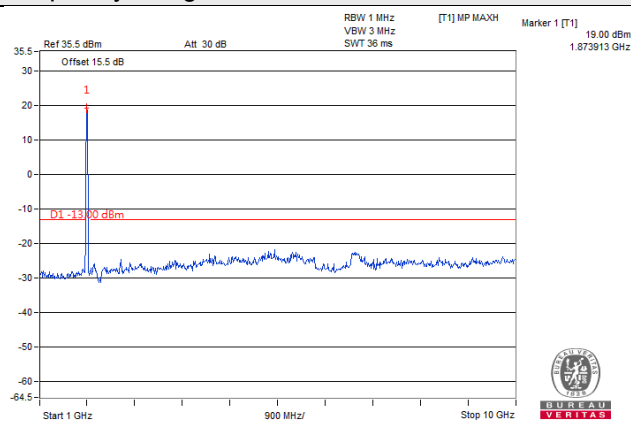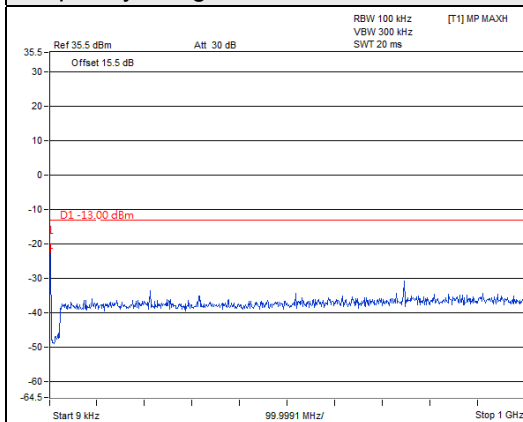

Frequency Range : 10GHz~26.5GHz


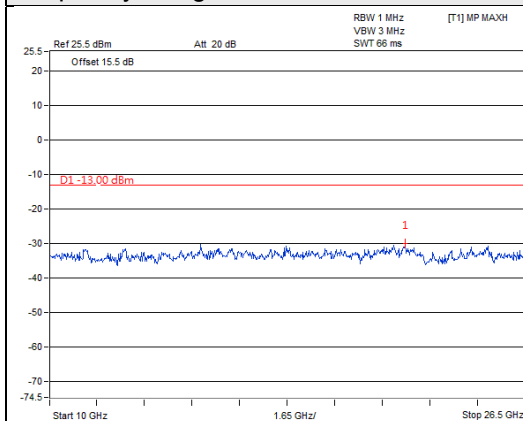


LTE Band 2, Channel Bandwidth 15MHz


Channel 19125 (1902.50MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

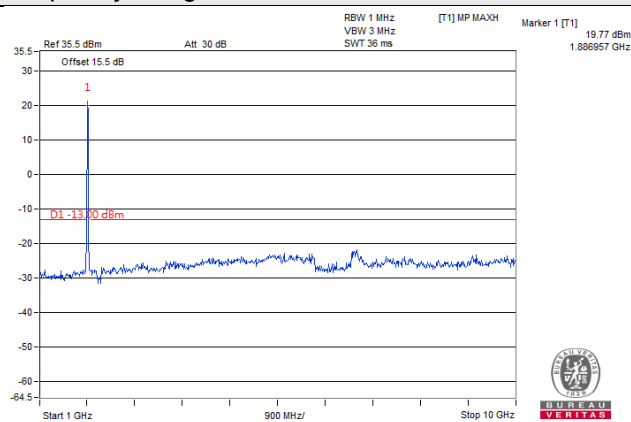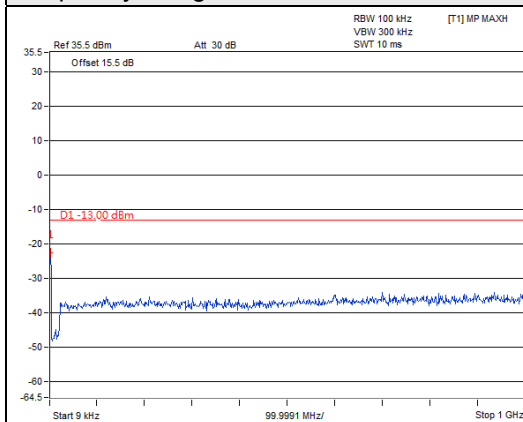

Frequency Range : 10GHz~26.5GHz


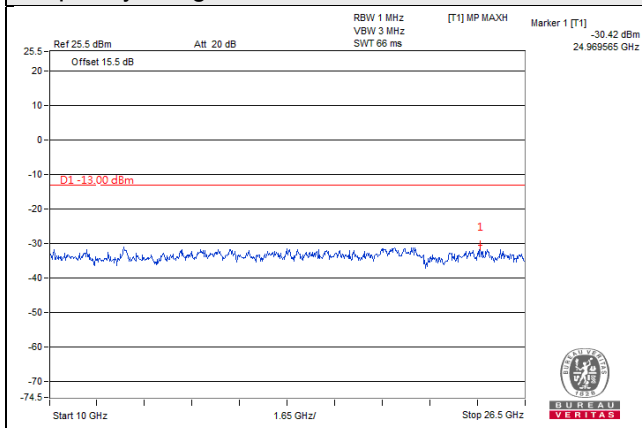


LTE Band 2, Channel Bandwidth 20MHz


Channel 18700 (1860.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

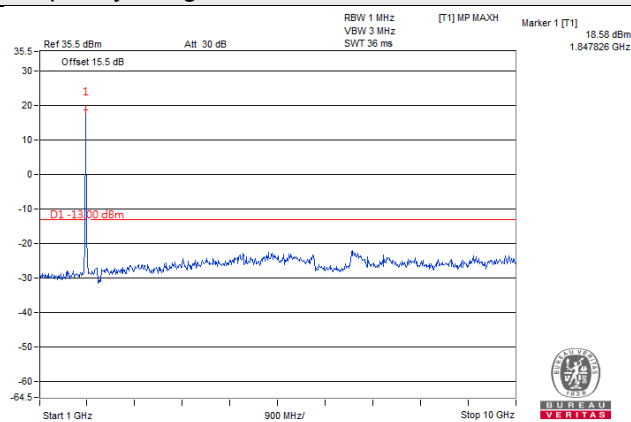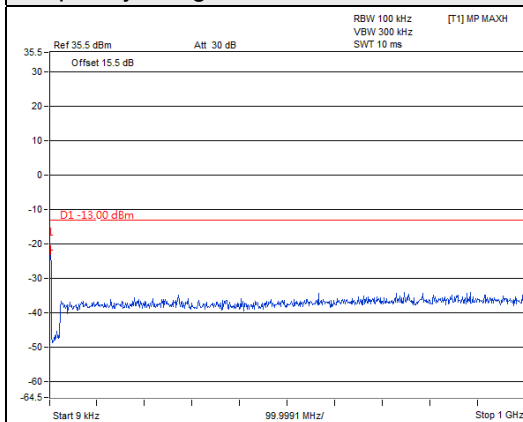

Frequency Range : 10GHz~26.5GHz


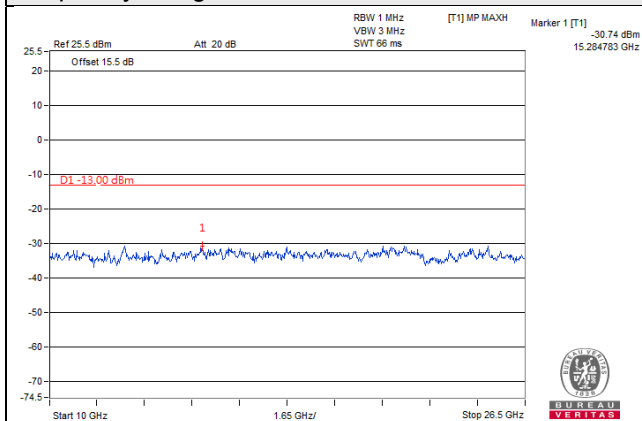


LTE Band 2, Channel Bandwidth 20MHz


Channel 18900 (1880.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

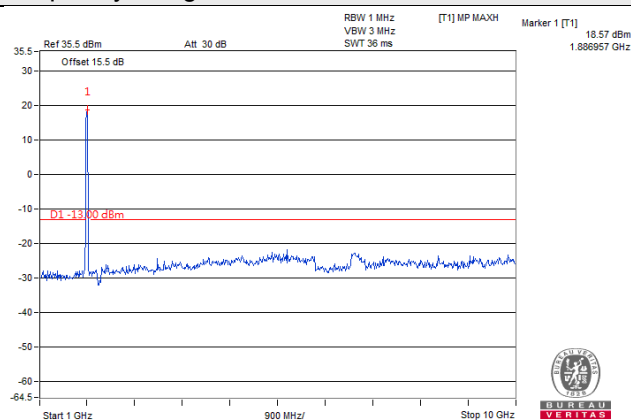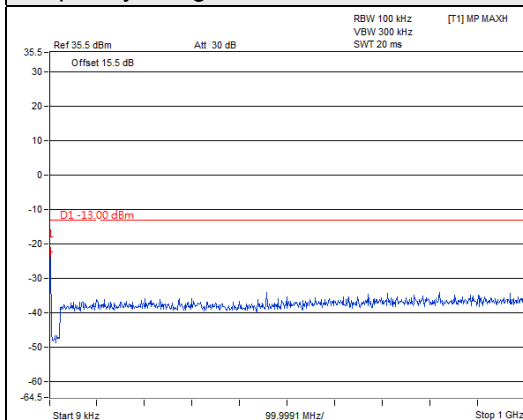

Frequency Range : 10GHz~26.5GHz


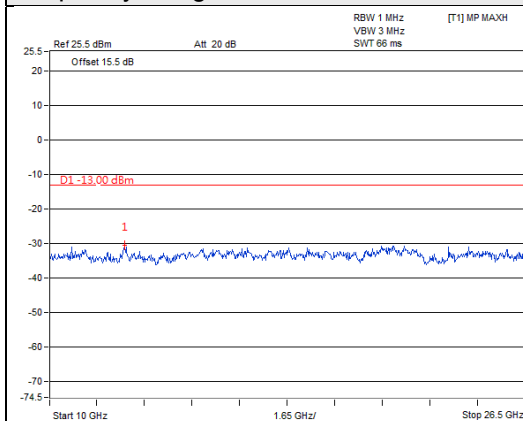


LTE Band 2, Channel Bandwidth 20MHz


Channel 19100 (1900.00MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~10GHz

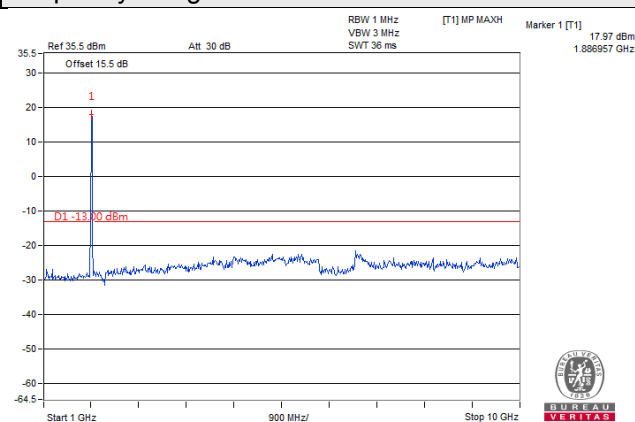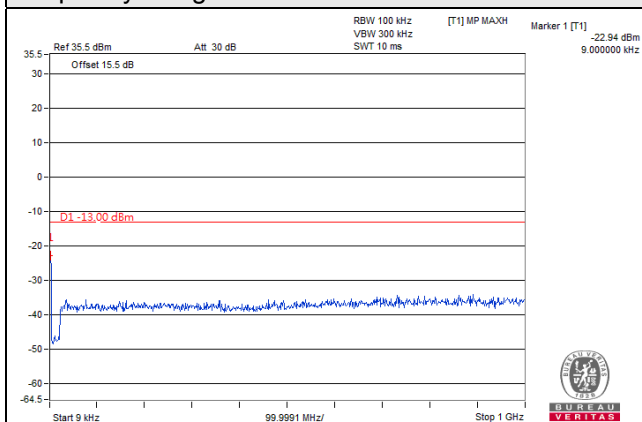

Frequency Range : 10GHz~26.5GHz

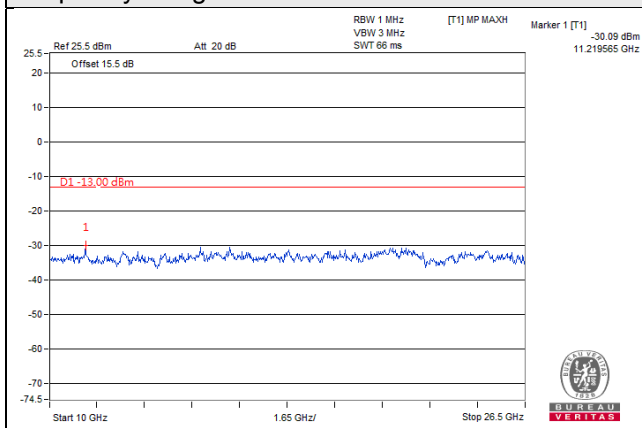

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For Radiated Emission below or equal 1GHz

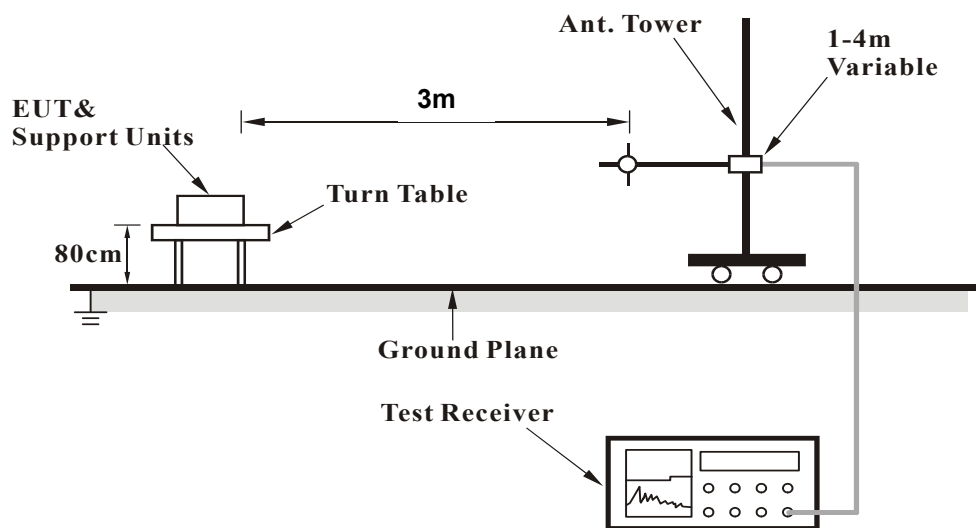

For Radiated Emission above 1GHz

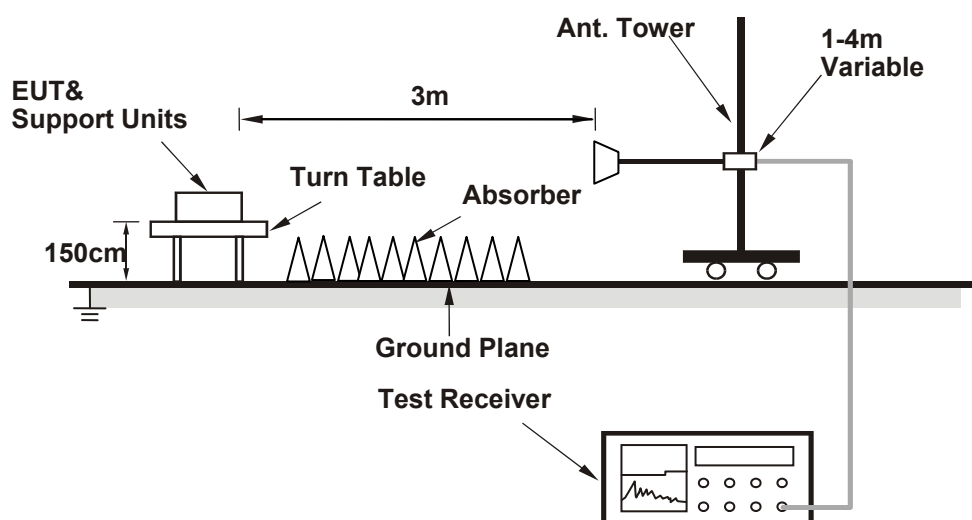

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz

LTE Band 2, Channel Bandwidth: 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.97	-38.4	-15.9	-18.8	-34.7	-13.0	-21.7
2	70.74	-50.6	-56.4	-0.4	-56.8	-13.0	-43.8
3	230.79	-53.1	-59.2	-1.7	-60.9	-13.0	-47.9
4	418.00	-67.9	-71.4	3.4	-68.0	-13.0	-55.0
5	721.61	-63.4	-63.6	3.6	-60.0	-13.0	-47.0
6	928.22	-68.4	-63.8	3.6	-60.2	-13.0	-47.2

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	54.25	-51.1	-52.2	-5.7	-57.9	-13.0	-44.9
2	263.77	-67.5	-64.9	-1.6	-66.5	-13.0	-53.5
3	484.93	-66.7	-70.5	3.7	-66.8	-13.0	-53.8
4	649.83	-68.1	-66.2	3.6	-62.6	-13.0	-49.6
5	714.82	-60.4	-57.9	3.5	-54.4	-13.0	-41.4
6	894.27	-68.5	-63.7	3.5	-60.2	-13.0	-47.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 3MHz

Mode	TX channel 18615 (1851.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	36.79	-54.4	-35.8	-15.2	-51.0	-13.0	-38.0
2	147.37	-68.1	-70.0	-2.9	-72.9	-13.0	-59.9
3	271.53	-66.4	-69.2	-1.4	-70.6	-13.0	-57.6
4	410.24	-68.7	-72.2	3.3	-68.9	-13.0	-55.9
5	665.35	-68.2	-69.3	3.6	-65.7	-13.0	-52.7
6	835.10	-68.1	-65.0	3.8	-61.2	-13.0	-48.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-38.3	-28.8	-19.4	-48.2	-13.0	-35.2
2	54.25	-51.1	-52.2	-5.7	-57.9	-13.0	-44.9
3	196.84	-68.4	-66.8	-2.5	-69.3	-13.0	-56.3
4	503.36	-67.8	-71.7	3.8	-67.9	-13.0	-54.9
5	624.61	-67.6	-66.4	3.7	-62.7	-13.0	-49.7
6	829.28	-67.6	-64.1	3.9	-60.2	-13.0	-47.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	44.55	-54.8	-42.6	-10.9	-53.5	-13.0	-40.5
2	84.32	-56.1	-62.5	0.4	-62.1	-13.0	-49.1
3	236.61	-58.1	-63.7	-1.5	-65.2	-13.0	-52.2
4	615.88	-67.8	-69.6	3.7	-65.9	-13.0	-52.9
5	713.85	-62.9	-63.1	3.5	-59.6	-13.0	-46.6
6	866.14	-68.5	-64.9	3.2	-61.7	-13.0	-48.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-40.8	-38.7	-10.4	-49.1	-13.0	-36.1
2	127.97	-59.7	-62.0	-3.2	-65.2	-13.0	-52.2
3	277.35	-68.9	-64.0	-1.6	-65.6	-13.0	-52.6
4	460.68	-64.0	-67.4	3.4	-64.0	-13.0	-51.0
5	742.95	-68.2	-64.9	3.6	-61.3	-13.0	-48.3
6	996.12	-69.7	-62.9	3.3	-59.6	-13.0	-46.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 10MHz

Mode	TX channel 18650 (1855.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	47.46	-56.4	-47.0	-9.2	-56.2	-13.0	-43.2
2	70.74	-50.6	-56.4	-0.4	-56.8	-13.0	-43.8
3	271.53	-66.4	-69.2	-1.4	-70.6	-13.0	-57.6
4	615.88	-67.8	-69.6	3.7	-65.9	-13.0	-52.9
5	835.10	-68.1	-65.0	3.8	-61.2	-13.0	-48.2
6	977.69	-69.3	-64.1	3.6	-60.5	-13.0	-47.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	35.82	-37.4	-31.2	-15.9	-47.1	-13.0	-34.1
2	127.97	-59.7	-62.0	-3.2	-65.2	-13.0	-52.2
3	277.35	-68.9	-64.0	-1.6	-65.6	-13.0	-52.6
4	479.11	-57.7	-61.5	3.6	-57.9	-13.0	-44.9
5	624.61	-67.6	-66.4	3.7	-62.7	-13.0	-49.7
6	928.22	-68.3	-63.2	3.6	-59.6	-13.0	-46.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 15MHz

Mode	TX channel 18675 (1857.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	34.85	-51.2	-31.6	-16.5	-48.1	-13.0	-35.1
2	147.37	-68.1	-70.0	-2.9	-72.9	-13.0	-59.9
3	238.55	-59.1	-64.5	-1.5	-66.0	-13.0	-53.0
4	427.70	-69.1	-73.0	3.5	-69.5	-13.0	-56.5
5	729.37	-66.1	-66.0	3.6	-62.4	-13.0	-49.4
6	950.53	-69.8	-65.2	3.7	-61.5	-13.0	-48.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	74.62	-56.6	-62.3	0.1	-62.2	-13.0	-49.2
2	188.11	-69.1	-68.6	-2.7	-71.3	-13.0	-58.3
3	286.08	-69.5	-65.8	-1.7	-67.5	-13.0	-54.5
4	503.36	-67.8	-71.7	3.8	-67.9	-13.0	-54.9
5	722.58	-66.5	-63.8	3.6	-60.2	-13.0	-47.2
6	885.54	-59.4	-55.0	3.4	-51.6	-13.0	-38.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	44.55	-54.8	-42.6	-10.9	-53.5	-13.0	-40.5
2	105.66	-62.9	-68.8	-2.2	-71.0	-13.0	-58.0
3	244.37	-61.1	-66.7	-1.4	-68.1	-13.0	-55.1
4	453.89	-69.0	-72.5	3.5	-69.0	-13.0	-56.0
5	670.20	-67.5	-68.6	3.6	-65.0	-13.0	-52.0
6	960.23	-69.5	-64.8	3.7	-61.1	-13.0	-48.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	49.40	-46.5	-45.8	-8.3	-54.1	-13.0	-41.1
2	234.67	-64.5	-65.1	-1.6	-66.7	-13.0	-53.7
3	484.93	-66.7	-70.5	3.7	-66.8	-13.0	-53.8
4	649.83	-68.1	-66.2	3.6	-62.6	-13.0	-49.6
5	722.58	-66.5	-63.8	3.6	-60.2	-13.0	-47.2
6	894.27	-68.5	-63.7	3.5	-60.2	-13.0	-47.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz

LTE Band 2, Channel Bandwidth: 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-58.7	-50.2	1.4	-48.8	-13.0	-35.8
2	5552.10	-57.6	-44.8	1.4	-43.4	-13.0	-30.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-58.3	-50.1	1.4	-48.7	-13.0	-35.7
2	5552.10	-56.3	-44.3	1.4	-42.9	-13.0	-29.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.0	-50.5	1.3	-49.2	-13.0	-36.2
2	5640.00	-57.4	-44.4	1.3	-43.1	-13.0	-30.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.9	-50.6	1.3	-49.3	-13.0	-36.3
2	5640.00	-55.7	-43.8	1.3	-42.5	-13.0	-29.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19193 (1909.30MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-58.7	-50.4	1.4	-49.0	-13.0	-36.0
2	5727.90	-57.4	-44.3	1.2	-43.1	-13.0	-30.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-58.9	-50.7	1.4	-49.3	-13.0	-36.3
2	5727.90	-56.2	-44.0	1.2	-42.8	-13.0	-29.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 3MHz

Mode	TX channel 18615 (1851.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703.00	-58.8	-50.3	1.4	-48.9	-13.0	-35.9
2	5554.50	-57.1	-44.2	1.3	-42.9	-13.0	-29.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703.00	-58.9	-50.7	1.4	-49.3	-13.0	-36.3
2	5554.50	-56.1	-44.0	1.3	-42.7	-13.0	-29.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.7	-50.2	1.3	-48.9	-13.0	-35.9
2	5640.00	-57.6	-44.6	1.3	-43.3	-13.0	-30.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.0	-50.7	1.3	-49.4	-13.0	-36.4
2	5640.00	-56.1	-44.2	1.3	-42.9	-13.0	-29.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19185 (1908.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817.00	-59.0	-50.7	1.4	-49.3	-13.0	-36.3
2	5725.50	-57.5	-44.4	1.2	-43.2	-13.0	-30.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817.00	-58.4	-50.2	1.4	-48.8	-13.0	-35.8
2	5725.50	-56.6	-44.4	1.2	-43.2	-13.0	-30.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-59.0	-50.5	1.4	-49.1	-13.0	-36.1
2	5557.50	-57.8	-44.9	1.3	-43.6	-13.0	-30.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-58.6	-50.4	1.4	-49.0	-13.0	-36.0
2	5557.50	-56.4	-44.3	1.3	-43.0	-13.0	-30.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.6	-50.1	1.3	-48.8	-13.0	-35.8
2	5640.00	-57.4	-44.4	1.3	-43.1	-13.0	-30.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.4	-50.1	1.3	-48.8	-13.0	-35.8
2	5640.00	-56.1	-44.2	1.3	-42.9	-13.0	-29.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19175 (1907.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-59.0	-50.7	1.4	-49.3	-13.0	-36.3
2	5722.50	-57.1	-44.0	1.2	-42.8	-13.0	-29.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-58.3	-50.1	1.4	-48.7	-13.0	-35.7
2	5722.50	-56.1	-44.0	1.2	-42.8	-13.0	-29.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 10MHz

Mode	TX channel 18650 (1855.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710.00	-59.1	-50.6	1.4	-49.2	-13.0	-36.2
2	5565.00	-57.1	-44.2	1.3	-42.9	-13.0	-29.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710.00	-58.5	-50.3	1.4	-48.9	-13.0	-35.9
2	5565.00	-56.4	-44.4	1.3	-43.1	-13.0	-30.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.7	-50.2	1.3	-48.9	-13.0	-35.9
2	5640.00	-57.4	-44.4	1.3	-43.1	-13.0	-30.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.0	-49.7	1.3	-48.4	-13.0	-35.4
2	5640.00	-55.1	-43.2	1.3	-41.9	-13.0	-28.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19150 (1905.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-57.8	-49.4	1.3	-48.1	-13.0	-35.1
2	5715.00	-56.8	-43.7	1.2	-42.5	-13.0	-29.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-58.7	-50.4	1.3	-49.1	-13.0	-36.1
2	5715.00	-56.3	-44.2	1.2	-43.0	-13.0	-30.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 15MHz

Mode	TX channel 18675 (1857.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715.00	-59.2	-50.7	1.4	-49.3	-13.0	-36.3
2	5572.50	-57.0	-44.1	1.3	-42.8	-13.0	-29.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715.00	-58.1	-49.9	1.4	-48.5	-13.0	-35.5
2	5572.50	-56.1	-44.1	1.3	-42.8	-13.0	-29.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.1	-50.6	1.3	-49.3	-13.0	-36.3
2	5640.00	-57.0	-44.0	1.3	-42.7	-13.0	-29.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.5	-50.2	1.3	-48.9	-13.0	-35.9
2	5640.00	-55.6	-43.7	1.3	-42.4	-13.0	-29.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19125 (1902.50MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805.00	-58.5	-50.1	1.3	-48.8	-13.0	-35.8
2	5707.50	-56.8	-43.7	1.2	-42.5	-13.0	-29.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805.00	-58.6	-50.4	1.3	-49.1	-13.0	-36.1
2	5707.50	-55.6	-43.6	1.2	-42.4	-13.0	-29.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 2, Channel Bandwidth: 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-59.0	-50.5	1.4	-49.1	-13.0	-36.1
2	5580.00	-56.4	-43.4	1.3	-42.1	-13.0	-29.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-58.3	-50.1	1.4	-48.7	-13.0	-35.7
2	5580.00	-55.2	-43.2	1.3	-41.9	-13.0	-28.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-58.7	-50.2	1.3	-48.9	-13.0	-35.9
2	5640.00	-57.5	-44.5	1.3	-43.2	-13.0	-30.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-57.7	-49.4	1.3	-48.1	-13.0	-35.1
2	5640.00	-55.0	-43.1	1.3	-41.8	-13.0	-28.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 19100 (1900.00MHz)	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	James Yang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-57.5	-49.1	1.3	-47.8	-13.0	-34.8
2	5700.00	-56.8	-43.7	1.2	-42.5	-13.0	-29.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-57.3	-49.1	1.3	-47.8	-13.0	-34.8
2	5700.00	-55.2	-43.3	1.2	-42.1	-13.0	-29.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---