

|                                                                                                                                                                      |                                                                                                                                                                                              |                       |                         |                                                                                       |           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------|---------------------------------------------------------------------------------------|-----------|
| <b>Test Report No.:</b>                                                                                                                                              |                                                                                                                                                                                              | <b>12121201.fcc04</b> |                         | Page 1 of 43                                                                          |           |
| Client:                                                                                                                                                              | <b>Intel Corporation</b><br>100 Center Point Circle Suite 200 Columbia, SC 29210 USA                                                                                                         |                       |                         |                                                                                       |           |
| Test Item:                                                                                                                                                           | <b>Bluetooth (DSS)</b><br>Wireless Network Adapter Module                                                                                                                                    |                       |                         |                                                                                       |           |
| Identification:                                                                                                                                                      | <b>7260NGW</b>                                                                                                                                                                               | MAC address:          | <b>001500B6698F</b>     |                                                                                       |           |
| Project No.:                                                                                                                                                         | <b>12121201</b>                                                                                                                                                                              | Date of Receipt:      | <b>January 07, 2013</b> |                                                                                       |           |
| Testing Location:                                                                                                                                                    | <b>TÜV Rheinland EPS B.V.</b><br>Eiberkamp 10<br>9351VT Leek                                                                                                                                 |                       |                         |                                                                                       |           |
| Test Specification:                                                                                                                                                  | <b>FCC 47 CFR Part 15, Subpart C, Section 15.209 and 15.247 (10-1-12 Edition)</b><br><b>RSS-Gen (issue 3, December 2010) and RSS-210 (Issue 8, December 2010)</b><br><b>ANSI C63.10-2009</b> |                       |                         |                                                                                       |           |
| Test Result:                                                                                                                                                         | The test item <b>passed</b> the test specification(s).                                                                                                                                       |                       |                         |                                                                                       |           |
| Testing Laboratory:                                                                                                                                                  | <b>TÜV Rheinland EPS B.V.</b><br>Eiberkamp 10<br>9351 VT Leek                                                                                                                                |                       |                         |                                                                                       |           |
| Tested by:                                                                                                                                                           |                                                                                                           |                       | Reviewed by:            |  |           |
| 2013-03-18                                                                                                                                                           | R. van der Meer / Inspector                                                                                                                                                                  |                       | 2013-03-18              | O. Hoekstra / Reviewer                                                                |           |
| Date                                                                                                                                                                 | Name/Position                                                                                                                                                                                | Signature             | Date                    | Name/Position                                                                         | Signature |
| Other Aspects:--                                                                                                                                                     |                                                                                                                                                                                              |                       |                         |                                                                                       |           |
| Abbreviations: P(ass) = passed<br>F(ail) = failed<br>N/A = not applicable<br>N/T = not tested                                                                        |                                                                                                                                                                                              |                       |                         |                                                                                       |           |
| This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V.<br>The test results relate only to the item(s) tested. |                                                                                                                                                                                              |                       |                         |                                                                                       |           |

Test Report No.:

**12121201.fcc04**

Page 2 of 43

## TEST SUMMARY

### **5.1.1 VOLTAGE REQUIREMENTS**

*RESULT: PASS*

### **5.1.2 ANTENNA REQUIREMENTS**

*RESULT: PASS*

### **5.2.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT**

*RESULT: PASS*

### **5.2.2 20dB AND 99% BANDWIDTH**

*RESULT: PASS*

### **5.2.3 NUMBER OF CHANNELS AND OCCUPANCY TIME**

*RESULT: PASS*

### **5.2.4 CARRIER FREQUENCY SEPARATION**

*RESULT: PASS*

### **5.2.5 BAND EDGE CONDUCTED EMISSIONS**

*RESULT: Pass*

### **5.2.6 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER**

*RESULT: PASS*

### **5.2.7 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER IN RESTRICTED BANDS**

*RESULT: PASS*

### **5.4.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER**

*RESULT: PASS*

Test Report No.:

**12121201.fcc04**

Page 3 of 43

## Contents

|            |                                                                                                       |                                            |
|------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------|
| <b>1.</b>  | <b>GENERAL REMARKS .....</b>                                                                          | <b>4</b>                                   |
| <b>1.1</b> | <b>COMPLEMENTARY MATERIALS .....</b>                                                                  | <b>4</b>                                   |
| <b>2.</b>  | <b>TEST SITES .....</b>                                                                               | <b>4</b>                                   |
| <b>2.1</b> | <b>TEST FACILITIES .....</b>                                                                          | <b>4</b>                                   |
| <b>2.2</b> | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT .....</b> | <b>5</b>                                   |
| <b>2.3</b> | <b>MEASUREMENT UNCERTAINTY .....</b>                                                                  | <b>6</b>                                   |
| <b>3.</b>  | <b>GENERAL PRODUCT INFORMATION .....</b>                                                              | <b>7</b>                                   |
| <b>3.1</b> | <b>PRODUCT FUNCTION AND INTENDED USE .....</b>                                                        | <b>7</b>                                   |
| <b>3.2</b> | <b>SYSTEM DETAILS.....</b>                                                                            | <b>7</b>                                   |
| <b>3.3</b> | <b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE .....</b>                                                | <b>8</b>                                   |
| <b>4.</b>  | <b>TEST SET-UP AND OPERATION MODES .....</b>                                                          | <b>9</b>                                   |
| <b>4.1</b> | <b>TEST METHODOLOGY .....</b>                                                                         | <b>9</b>                                   |
| <b>4.2</b> | <b>OPERATION MODES.....</b>                                                                           | <b>9</b>                                   |
| <b>4.3</b> | <b>PHYSICAL CONFIGURATION FOR TESTING .....</b>                                                       | <b>10</b>                                  |
| <b>4.4</b> | <b>TEST SOFTWARE .....</b>                                                                            | <b>11</b>                                  |
| <b>4.5</b> | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>                                               | <b>12</b>                                  |
| <b>5.</b>  | <b>TEST RESULTS .....</b>                                                                             | <b>13</b>                                  |
| <b>5.1</b> | <b>TECHNICAL REQUIREMENTS.....</b>                                                                    | <b>13</b>                                  |
| 5.1.1      | <i>Voltage Requirements .....</i>                                                                     | <i>13</i>                                  |
| 5.1.2      | <i>Antenna Requirements .....</i>                                                                     | <i>13</i>                                  |
| 5.1.3      | <i>Restricted Bands of Operation .....</i>                                                            | <i><b>Error! Bookmark not defined.</b></i> |
| <b>5.2</b> | <b>CONDUCTED MEASUREMENTS AT ANTENNA PORT .....</b>                                                   | <b>14</b>                                  |
| 5.2.1      | <i>Conducted Output Power.....</i>                                                                    | <i>14</i>                                  |
| 5.2.2      | <i>20dB and 99% Bandwidth.....</i>                                                                    | <i>19</i>                                  |
| 5.2.3      | <i>Number of hopping channels and Channel Occupancy .....</i>                                         | <i>24</i>                                  |
| 5.2.4      | <i>Band Edge Conducted Emissions .....</i>                                                            | <i>31</i>                                  |
| 5.2.5      | <i>Radiated Spurious Emissions of Transmitter.....</i>                                                | <i>34</i>                                  |
| 5.2.6      | <i>Radiated Spurious Emissions of Transmitter in restricted bands .....</i>                           | <i>39</i>                                  |
| <b>5.3</b> | <b>SPURIOUS EMISSIONS IN RECEIVE MODE .....</b>                                                       | <b>41</b>                                  |
| <b>5.4</b> | <b>AC POWER LINE CONDUCTED MEASUREMENTS .....</b>                                                     | <b>43</b>                                  |
| 5.4.1      | <i>AC Power Line Conducted Emission of Transmitter.....</i>                                           | <i>43</i>                                  |

Test Report No.:

**12121201.fcc04**

Page 4 of 43

## **1. General Remarks**

### **1.1 Complementary Materials**

There is no attachment to this test report.

## **2. Test Sites**

### **2.1 Test Facilities**

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

|                      |                  |
|----------------------|------------------|
| Temperature (*)      | : +15°C to +35°C |
| Relative humidity(*) | : 20 % to 75 %   |
| Supply voltage       | : 120VAC/60Hz    |
| Air pressure         | : 950 – 1050 hPa |

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

Test Report No.:

**12121201.fcc04**

Page 5 of 43

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

| Kind of Equipment                          | Manufacturer    | Model Name           | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|--------------------------------------------|-----------------|----------------------|------------------|----------------------------|--------------------------------|
| <b>For Antenna Port Conducted Emission</b> |                 |                      |                  |                            |                                |
| Spectrum Analyzer                          | Rohde & Schwarz | FSP40                | 99538            | 11/2012                    | 11/2013                        |
| Temperature-Humiditymeter                  | Extech          | SD500                | 99857            | 02/2012                    | 02/2014                        |
| Spectrum Analyzer                          | Rohde & Schwarz | FSV                  | 99733            | 05/2012                    | 05/2013                        |
| <b>For Radiated Emission</b>               |                 |                      |                  |                            |                                |
| Measurement Receiver                       | Rohde & Schwarz | ESCI                 | 99699            | 03-26/2012                 | 03-26/2013                     |
| RF Cable S-AR                              | Gigalink        | APG0500              | 99858            | 02/2013                    | 02/2014                        |
| Controller                                 | Maturo          | SCU/088/8090811      | 99861            | N/A                        | N/A                            |
| Controller                                 | EMCS            | DOC202               | 99608            | N/A                        | N/A                            |
| Controller                                 | Heinrich Deisel | 4630-100             | 99107            | N/A                        | N/A                            |
| Test facility                              | Comtest         | FCC listed: 90828    | 99580            | 12/2011                    | 12/2014                        |
| Spectrum Analyzer                          | Rohde & Schwarz | FSP40                | 99538            | 11/2012                    | 11/2013                        |
| Controller                                 | EMCS            | DOC202               | 99608            | N/A                        | N/A                            |
| Antenna mast                               | EMCS            | AP-4702C             | 99609            | N/A                        | N/A                            |
| Temperature-Humiditymeter                  | Extech          | SD500                | 99855            | 02/2012                    | 02/2014                        |
| Guidehorn 1-18 GHz                         | EMCO            | 3115                 | 12484            | 04/2012                    | 04/2013                        |
| Guidehorn 18-40 GHz                        | EMCO            | RA42-K-F-4B-C        | 12488            | 04/2012                    | 04/2013                        |
| Biconilog Testantenna                      | Chase           | CBL 6111B            | 15633            | 01/2013                    | 01/2014                        |
| 2.4 GHz bandreject filter                  | BSC             | XN-1783              | 14450            | N/A                        | N/A                            |
| Bandpass filter 4-10 GHz                   | Reactel         | 7AS-7G-6G-511        | 99076            | N/A                        | N/A                            |
| Bandpass filter 10-26 GHz                  | Reactel         | 9HS-10G/26.5G-S11    | 99136            | N/A                        | N/A                            |
| Preamplifier 0.5 - 18 GHz                  | Miteq           | AMF-5D-005180-28-13p | 99596            | N/A                        | N/A                            |
| Filterbox                                  | EMCS            | RFS06S               | 99606            | 10/2012                    | 10/2013                        |

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

Test Report No.:

**12121201.fcc04**

Page 6 of 43

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty**

| Measurement Type                | Frequency      | Uncertainty |
|---------------------------------|----------------|-------------|
| Antenna Port Conducted Emission | < 1GHz         | ±0.5dB      |
|                                 | > 1GHz         | ±0.7dB      |
| Radiated Emission               | 150kHz - 30MHz | ±5.0dB      |
|                                 | 30MHz - 1GHz   | ±5.0dB      |
|                                 | > 1GHz         | ±5.5dB      |

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The brand Intel model 7260NGW, hereafter referred to as EUT, is a PCIe small form factor IEEE 802.11a/b/g/n/ac + Bluetooth wireless network adapter module. The module will support MIMO (2x2) for 802.11n/ac modes and MISO (1x2) for 802.11a/b/g modes and utilizes DSSS and OFDM modulation techniques. Bluetooth operates with basic, EDR and BLE modes as SISO (1x1). When Bluetooth is operational wifi operates as SISO (1x1).

The module is sold under two different FCC ID numbers under the same model number (see table below). The FCC ID ending in "U" is intended to allow user installation conditions and host systems must be provided with a BIOS locking feature to provide mutual authentication between module and host devices.

| Brand | Model Number | Description                                           | FCC/IC IDs                              |
|-------|--------------|-------------------------------------------------------|-----------------------------------------|
| Intel | 7260NGW      | 802.11a/b/g/n/ac + BT wireless network adapter module | PD97260NG<br>PD97260NGU<br>1000M-7260NG |

The content of this report and measurement results have not been changed other than the way of presenting the data.

#### 3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

|                       |   |                                       |
|-----------------------|---|---------------------------------------|
| EUT                   | : | Wireless Network Adapter Module (DSS) |
| Manufacturer          | : | Intel Corporation                     |
| Brand                 | : | Intel                                 |
| Model(s)              | : | 7260NGW                               |
| MAC address (BT)      | : | 00:15:00:B6:69:93                     |
| Voltage input rating  | : | +3.3 V                                |
| Voltage output rating | : | --                                    |
| Current input rating  | : | --                                    |
| Antenna               | : | AUX3                                  |
| Operating frequency   | : | 2402 – 2480 MHz for Bluetooth         |
| Modulation            | : | GFSK, PSK                             |
| Remarks               | : | n.a.                                  |

Test Report No.:

**12121201.fcc04**

Page 8 of 43

**Table 3: Interfaces present on the EUT**

| No. | Port         | From       | To                        | Remarks                      |
|-----|--------------|------------|---------------------------|------------------------------|
| 1.  | Mains        | Mains      | Laptop (AUX1)             | Through a AC/DC power supply |
| 2.  | Mains        | Mains      | Test jig (AUX2)           | Through a AC/DC power supply |
| 3.  | Data com.    | Laptop USB | Fixture USB               | --                           |
| 4.  | Antenna port | EUT        | Reference antennas (AUX3) | --                           |

### **3.3 Countermeasures to achieve EMC Compliance**

No additional measures were employed to achieve compliance.



Test Report No.:

**12121201.fcc04**

Page 9 of 43

## 4. Test Set-up and Operation Modes

### 4.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-210, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 (DSS).

The test methods, which have been used, are based on **Error! Reference source not found..**

For details, see under each test item.

### 4.2 Operation Modes

| Modulation | Duty cycle | Antenna | Test frequencies (MHz) |                      |        |                      |         |                      |
|------------|------------|---------|------------------------|----------------------|--------|----------------------|---------|----------------------|
|            |            |         | Lowest                 | Gain control setting | Middle | Gain control setting | Highest | Gain control setting |
| DH5        | 0.75       | 1       | 2402                   | 10                   | 2440   | 10                   | 2480    | 10                   |
| 3DH5       | 0.75       | 1       | 2402                   | 10                   | 2440   | 10                   | 2480    | 10                   |

Testing was performed at the lowest operating frequency, at the operating frequency in the middle of the specified frequency band and at the highest operating frequency. These operation modes were selected after review of the capabilities and characteristics of the EUT. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found , through pre-testing, to produce emissions similar to those for 3Mb/s.

Antenna ports are also referred to as Chain A and Chain B, where chain A refers to Antenna-port 2 and Chain B refers to Antenna-port 1. Bluetooth is only available on Antenna 1 (Chain B).


### 4.3 Physical Configuration for Testing

The EUT was installed into a test-fixture that interfaced to a laptop computer and dc power supply. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel or continuously receive on the channel as specified in the testdata. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis (only attached to the test jig) and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4:2009.

**Figure 1: Test Setup Diagram**

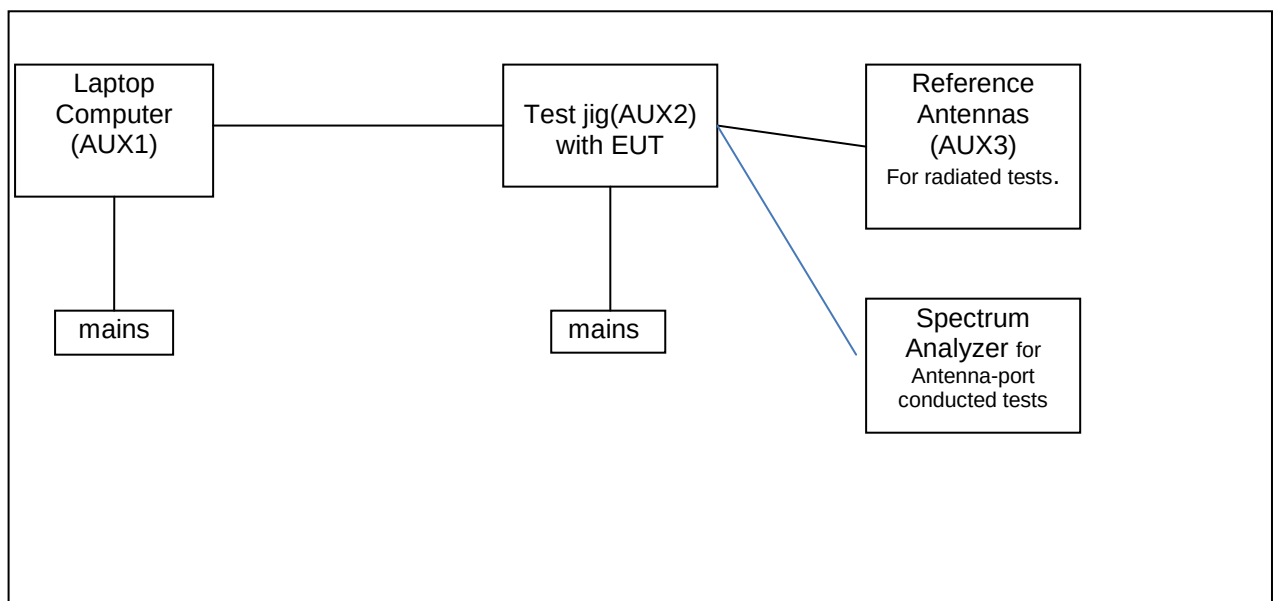

**Notes:**

For more details, refer to the document: Test Set-Up Photographs document.

Test Report No.:

**12121201.fcc04**

Page 11 of 43

#### **4.4 Test Software**

The operation modes could be initiated by using test software as supplied by Intel Corporation. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by Intel Corporation and used during all tests is:

Test software : DRTU 1.6.0-0510  
Driver : 16.0.0.17

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

Test Report No.:

**12121201.fcc04**

Page 12 of 43

## 4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. AUX1  
Product: Laptop Computer  
Brand: Lenovo  
Model: 9456-HTG  
Serial Number: L3-BF847 07/02  
Remark: property applicant, host for testsoftware and AUX2
2. AUX2  
Product: Test Jig  
Brand: Intel  
Model: NGFF Extension Rev. 01  
Rated Voltage: 3.3 Vdc  
Antenna: Internal, integrated on the PCB  
Remarks: used for Antenna-port conducted tests
3. AUX3  
Product: Reference antennas  
Manufacturer: SkyCross Electronics (Shenzhen) Co.,Ltd  
Brand: SkyCross Electronics (Shenzhen) Co.,Ltd  
Gain at 2G4: 3.0 dBi (declared by applicant)  
Remarks: used for radiated tests

Test Report No.:

**12121201.fcc04**

Page 13 of 43

## **5. Test Results**

### **5.1 Technical Requirements**

#### **5.1.1 Voltage Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the power supply requirements.

#### **5.1.2 Antenna Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.203 and IC RSS-Gen section 7.1.2

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has two non standard PIFA antenna connectors which complies with the requirements.

Test Report No.:

**12121201.fcc04**

Page 14 of 43

## **5.2 Conducted Measurements at Antenna Port**

### **5.2.1 Conducted Output Power**

**RESULT: Pass**

Date of testing: 2013-01-14 & 2013-02-14

Requirements:

FCC 15.247(b)(3)

For systems using frequency hopping using at least 15 channels in the 2400-2483.5MHz band, the maximum peak output power is 1W (+30dBm).

Test procedure:

ANSI C63.10-2009 and KDB 558074 D01.

The Peak Conducted Output Power was measured using the channel integration method according to option 2 in KDB 558074 D01.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables. Declared maximum antenna gain: 3 dBi.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Notes:  $\text{mW} = 10^{(\text{dBm}/10)}$   
 $\text{dBm} = 10 \times \log(\text{mW})$

**plots : Peak power plots,**

Plots of the Peak Power outputs are given on the next pages, correction factors included in the reading.

Test Report No.:


**12121201.fcc04**

Page 15 of 43

**Table 4: Conducted Output Power**

Operation mode: DH5, Antenna 1

| Frequency [MHz] | Gain control setting (dB) | Output Power [dBm] | Limit [dBm] | Maximum EIRP Power (dBm) | Plot number |
|-----------------|---------------------------|--------------------|-------------|--------------------------|-------------|
| 2402            | 10                        | +4.68              | +30         | +7.69                    | 1a          |
| 2440            | 10                        | +6.83              | +30         | +9.83                    | 1b          |
| 2480            | 10                        | +7.24              | +30         | +10.24                   | 1c          |

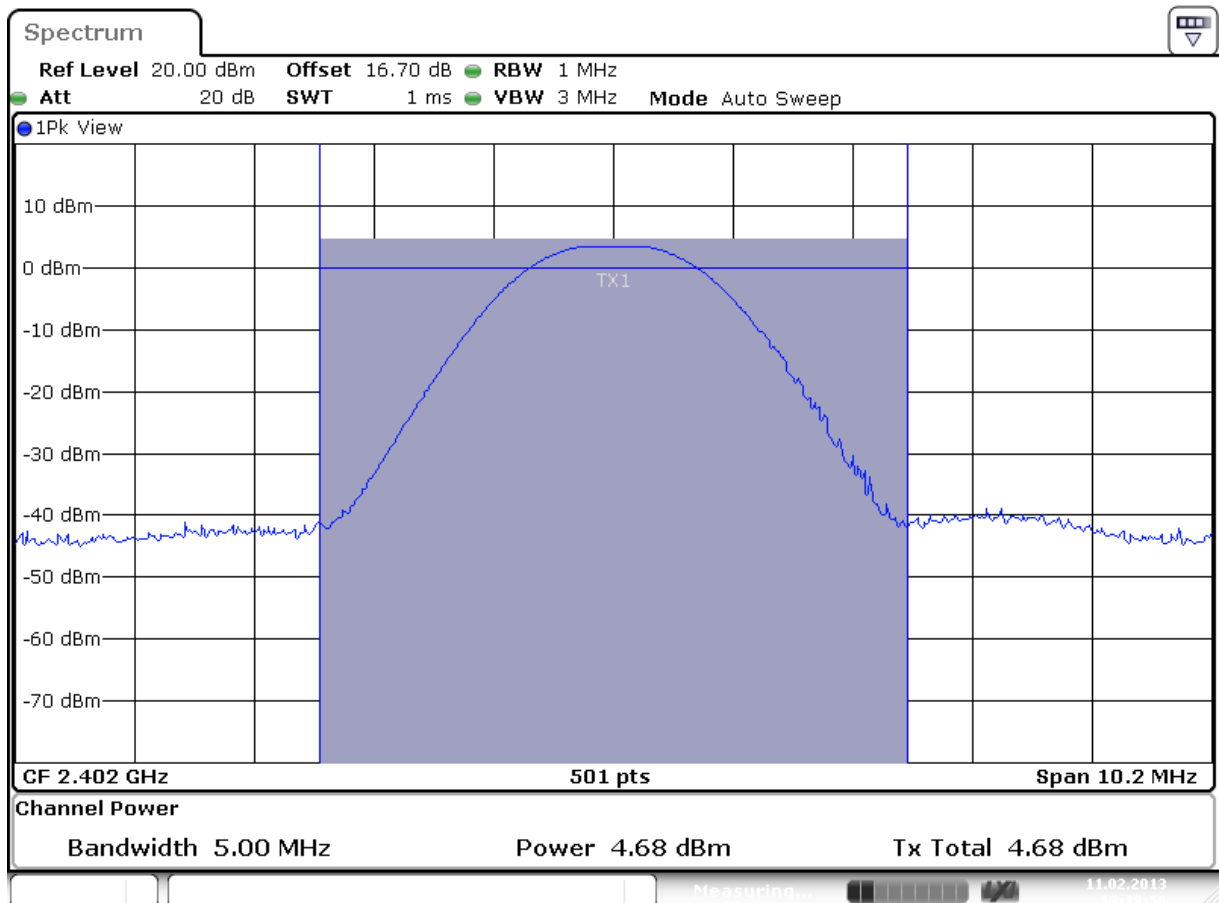


Date: 11.FEB.2013 13:18:56

Plot 1a

Test Report No.:


**12121201.fcc04**

Page 16 of 43

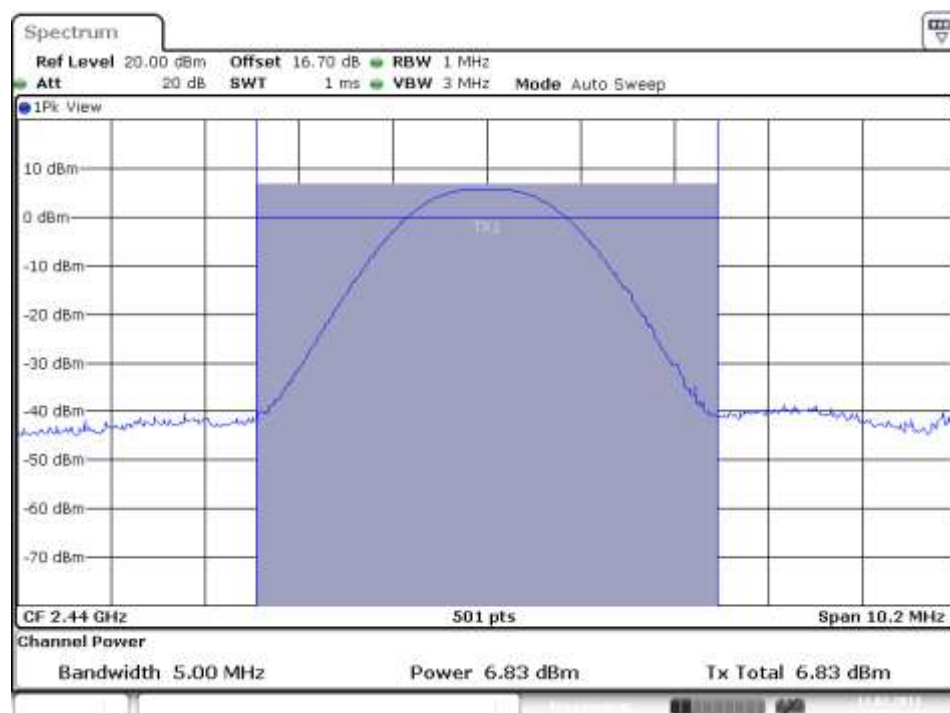

Date: 11.FEB.2013 13:28:30

Plot 1b

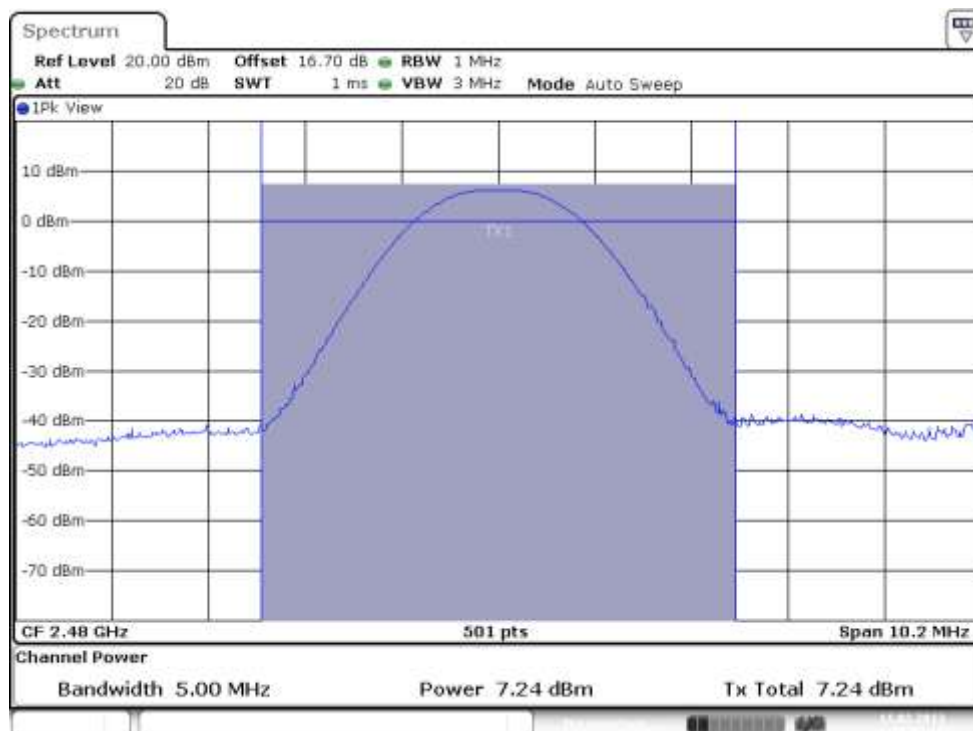

Date: 11.FEB.2013 13:32:18

Plot 1c




Test Report No.:

**12121201.fcc04**

Page 17 of 43

Operation mode: 3DH5, Antenna 1

| Frequency [MHz] | Gain control setting (dB) | Output Power [dBm] | Limit [dBm] | Maximum EIRP Power (dBm) | Plot number |
|-----------------|---------------------------|--------------------|-------------|--------------------------|-------------|
| 2402            | 10                        | +1.85              | +30         | +4.85                    | 2a          |
| 2440            | 10                        | +6.68              | +30         | +9.68                    | 2b          |
| 2480            | 10                        | +7.23              | +30         | +10.23                   | 2c          |

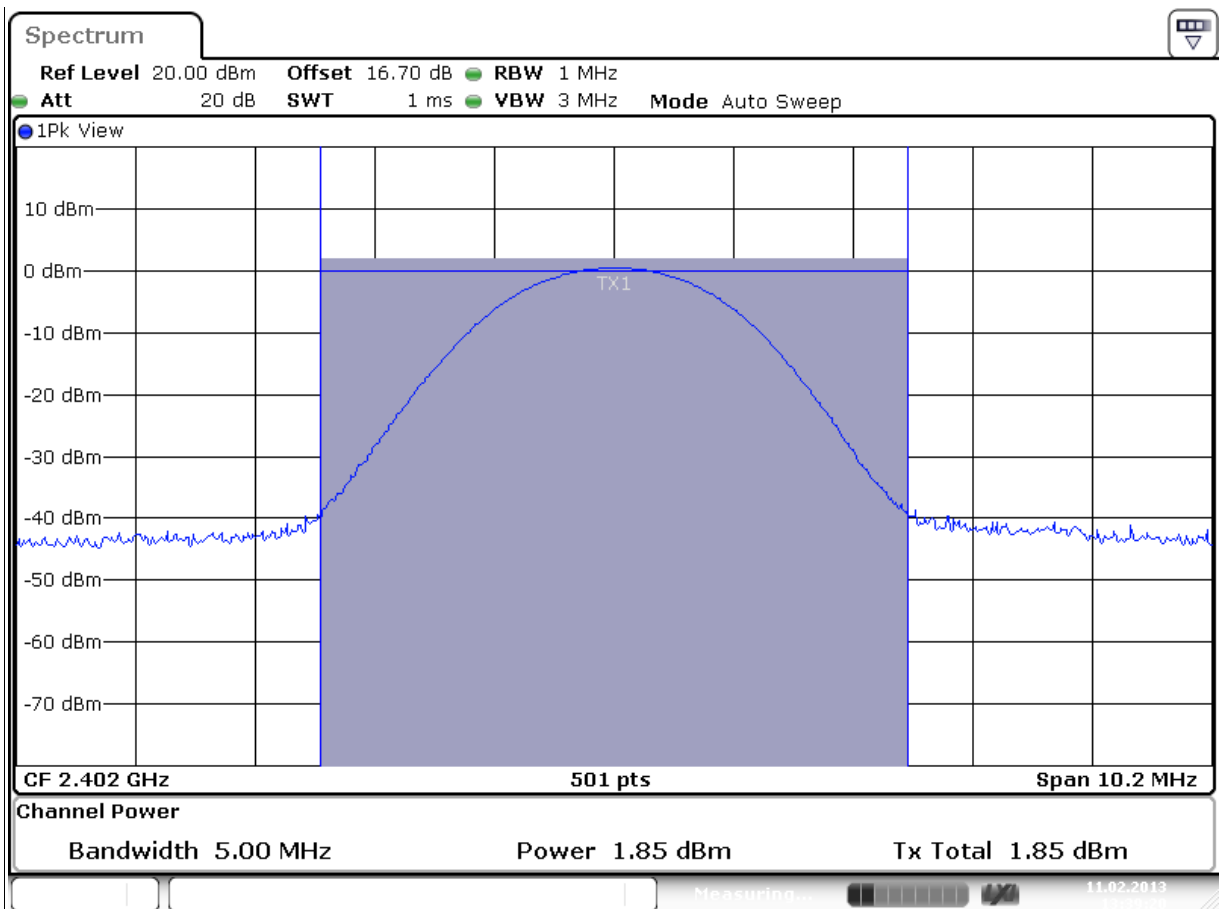


Date: 11.FEB.2013 13:39:20

Plot 2a

Test Report No.:


**12121201.fcc04**

Page 18 of 43

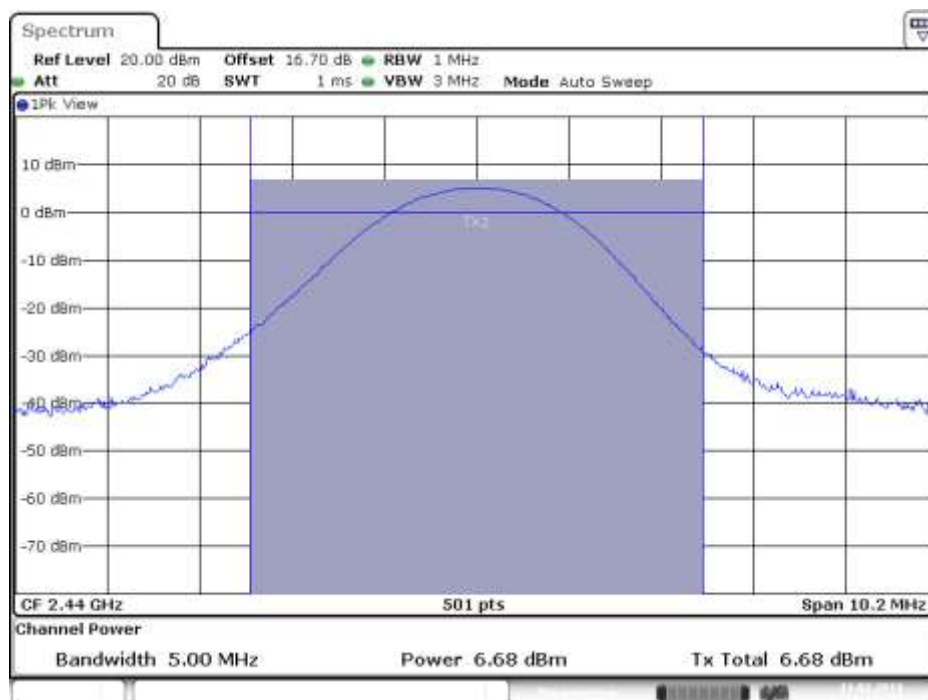

Date: 11.FEB.2013 13:45:04

Plot 2b

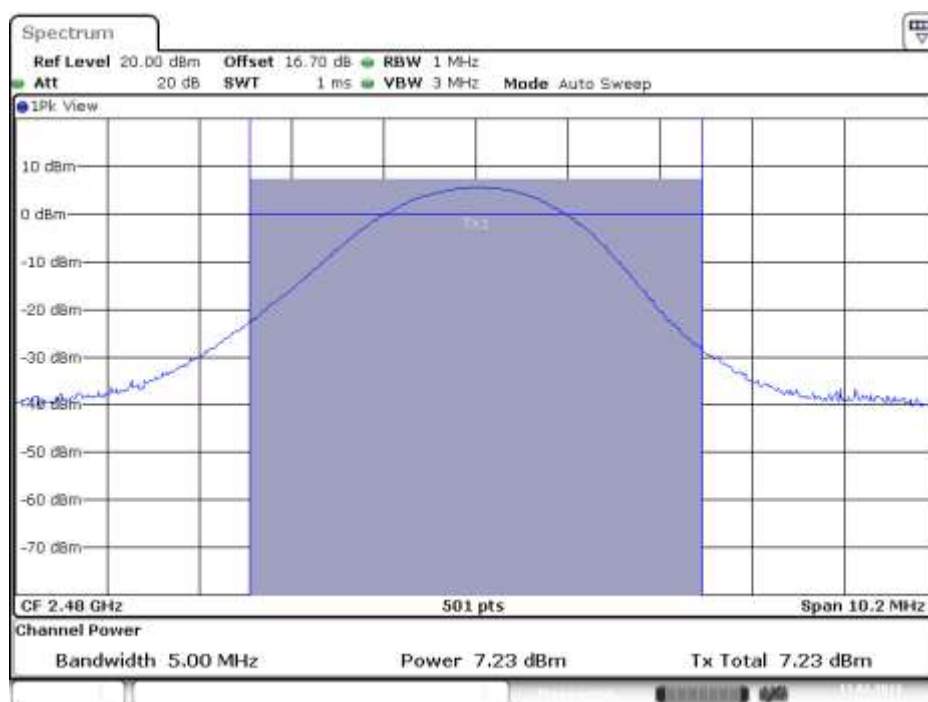

Date: 11.FEB.2013 13:48:25

Plot 2c

Test Report No.:

**12121201.fcc04**

Page 19 of 43

## **5.2.2 20dB and 99% Bandwidth**

**RESULT: PASS**

Date of testing:

2013-02-11

Requirements:

FCC 15.247(a)(2) an RSS-210 Section A8.2(a)

For systems using hopping technology in the 2400-2483.5MHz band, the 20dB bandwidth is not limited.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 20dB bandwidth: ANSI C63.10-2009

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

ANSI C63.10-2009 and RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Test Report No.:


**12121201.fcc04**

Page 20 of 43

**Table 5: 20dB and 99% Bandwidth**

Operation mode: DH5, Antenna 1

| Operating Frequency [MHz] | 99% Bandwidth [kHz] | 20dB Bandwidth [kHz] | Limit [kHz]    | Plot number |
|---------------------------|---------------------|----------------------|----------------|-------------|
| 2402                      | 946                 | 1102                 | Not applicable | A           |
| 2440                      | 946                 | 1114                 | Not applicable | B           |
| 2480                      | 946                 | 1114                 | Not applicable | C           |

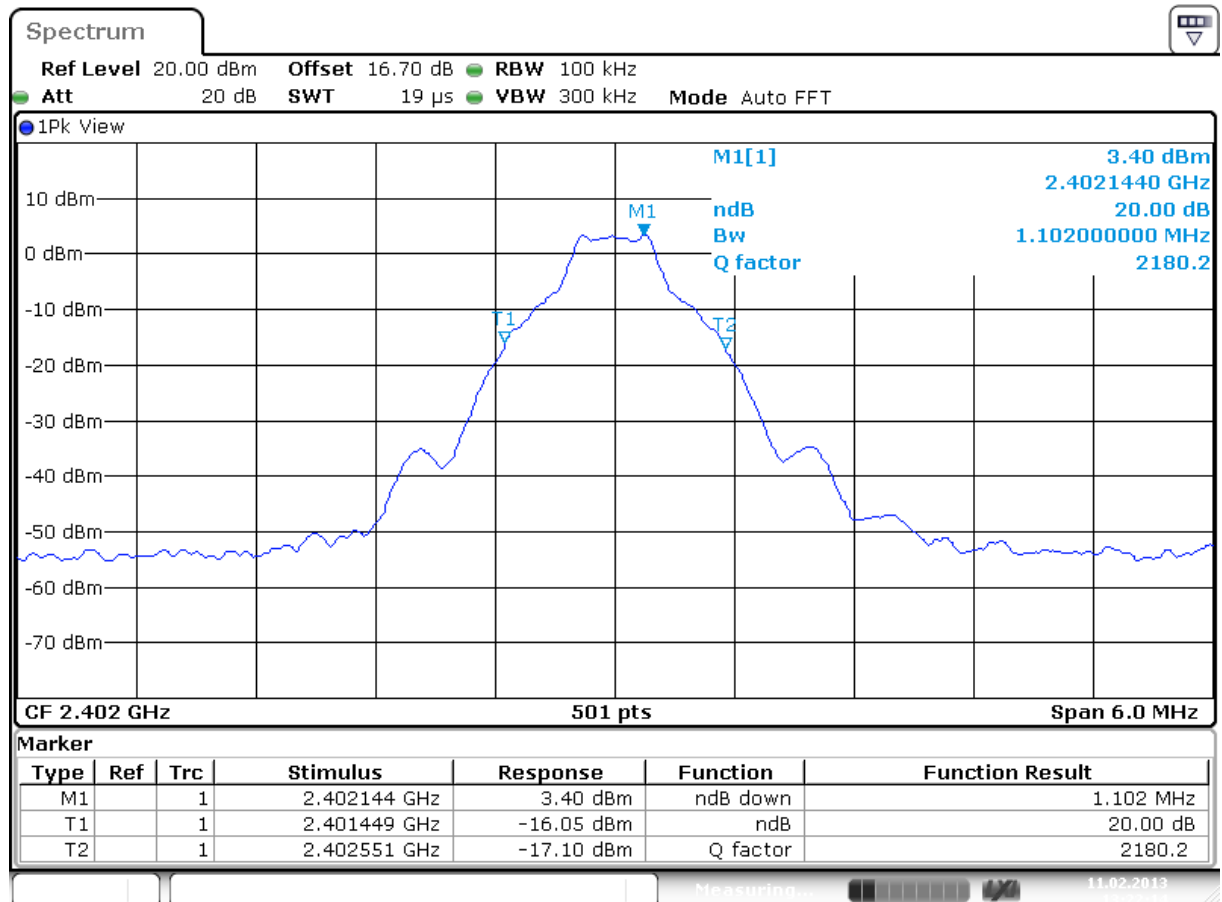


Date: 11.FEB.2013 13:22:14

Plot A

Test Report No.:

**12121201.fcc04**

Page 21 of 43

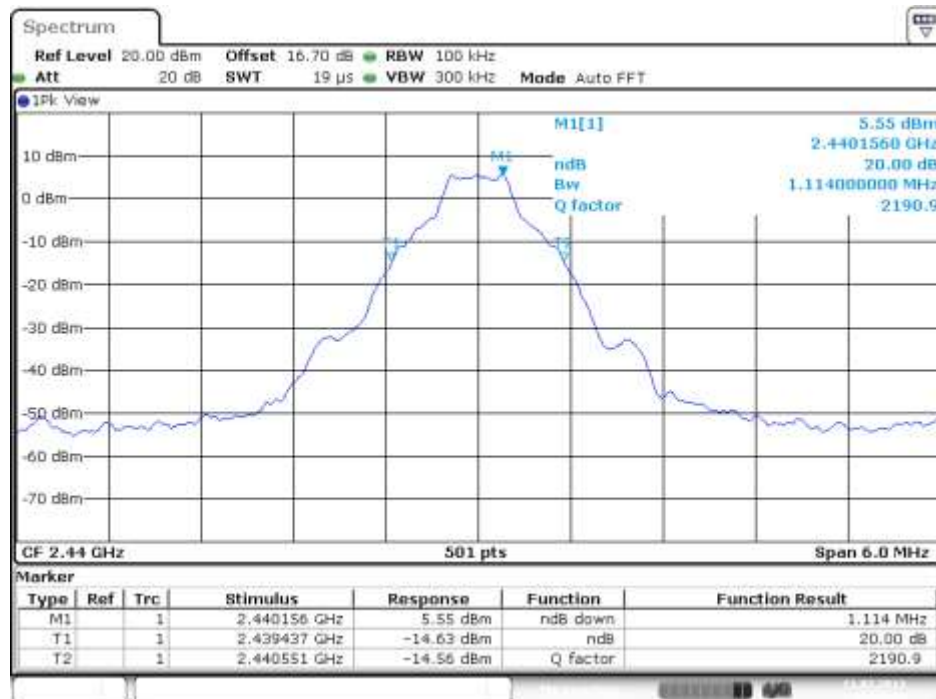

Date: 11.FEB.2013 13:29:33

Plot B



Date: 11.FEB.2013 13:33:11

Plot C


Test Report No.:

**12121201.fcc04**

Page 22 of 43

Operation mode: 3DH5, Antenna 1

| Operating Frequency [MHz] | 99% Bandwidth [kHz] | 20dB Bandwidth [kHz] | Limit [kHz]    | Plot number |
|---------------------------|---------------------|----------------------|----------------|-------------|
| 2402                      | 1389                | 1605                 | Not applicable | A           |
| 2440                      | 1425                | 1605                 | Not applicable | B           |
| 2480                      | 1449                | 1581                 | Not applicable | C           |

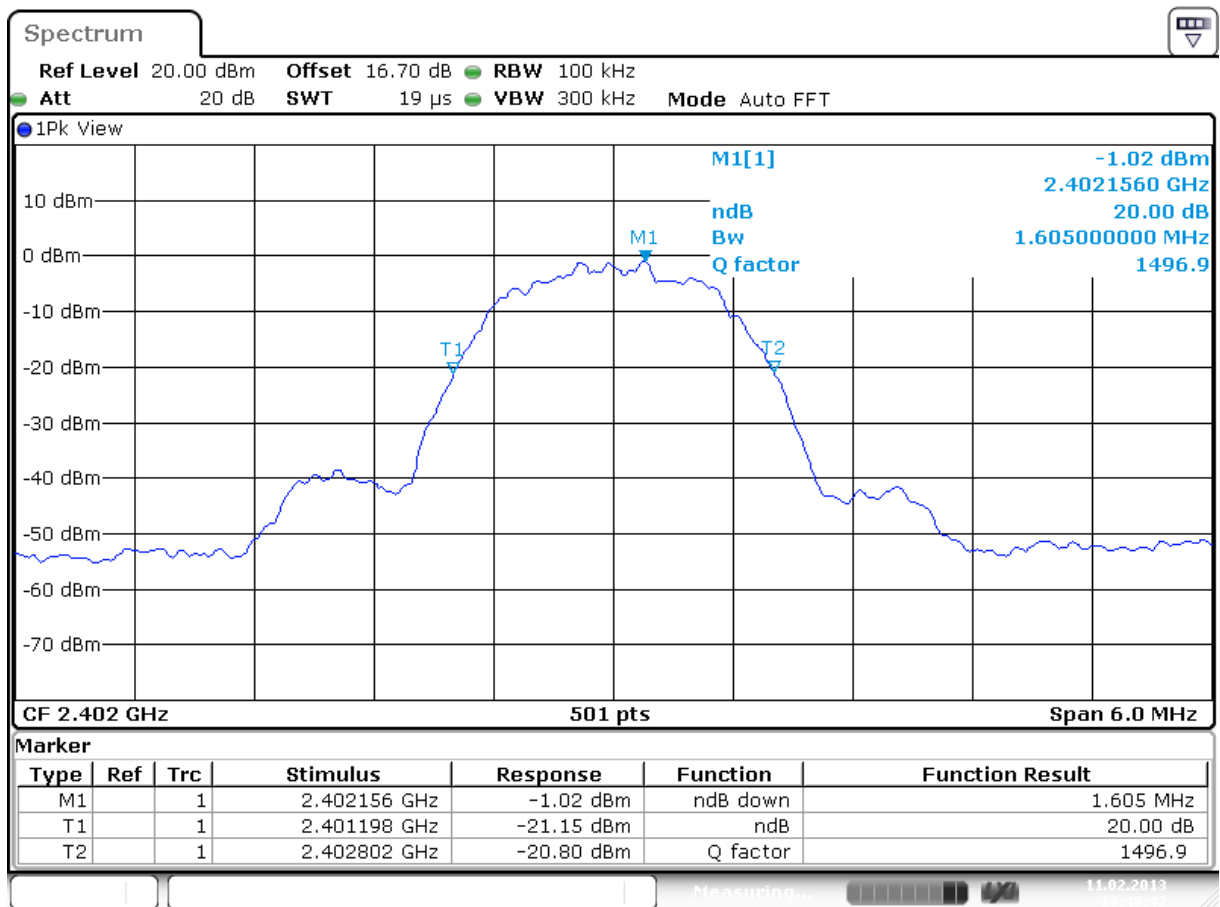

Date: 11.FEB.2013 13:40:42

Plot A

Test Report No.:


**12121201.fcc04**

Page 23 of 43



Date: 11.FEB.2013 13:46:03

Plot B

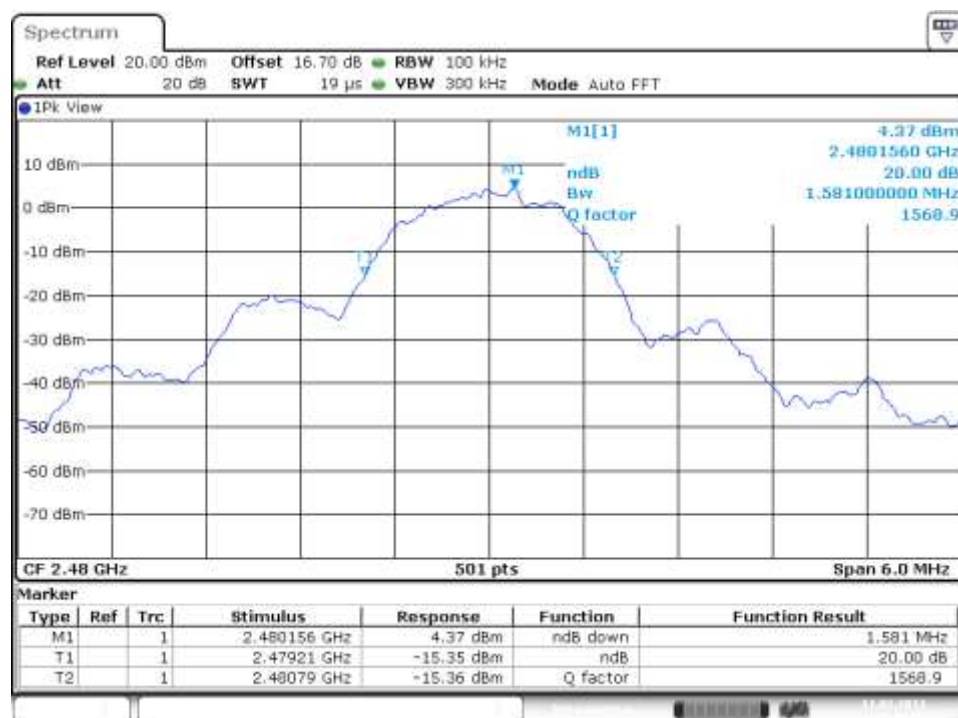

Date: 11.FEB.2013 13:49:17

Plot C

Test Report No.:

**12121201.fcc04**

Page 24 of 43

### **5.2.3 Number of hopping channels and Channel Occupancy**

**RESULT: Pass**

Date of testing:

2013-01-24 / 2013-02-11

Requirements:

FCC 15.247(a)(1)(iii) and RSS-210 section A8.1d

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test procedure: ANSI C63.10-2009.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to and the video bandwidth was set to . The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement.



Test Report No.:


**12121201.fcc04**

Page 25 of 43

## Number of hopping channels



Ref 13.9 dBm      \*RBW 100 kHz  
\*Att 20 dB      \*VBW 100 kHz  
SWT 10 ms

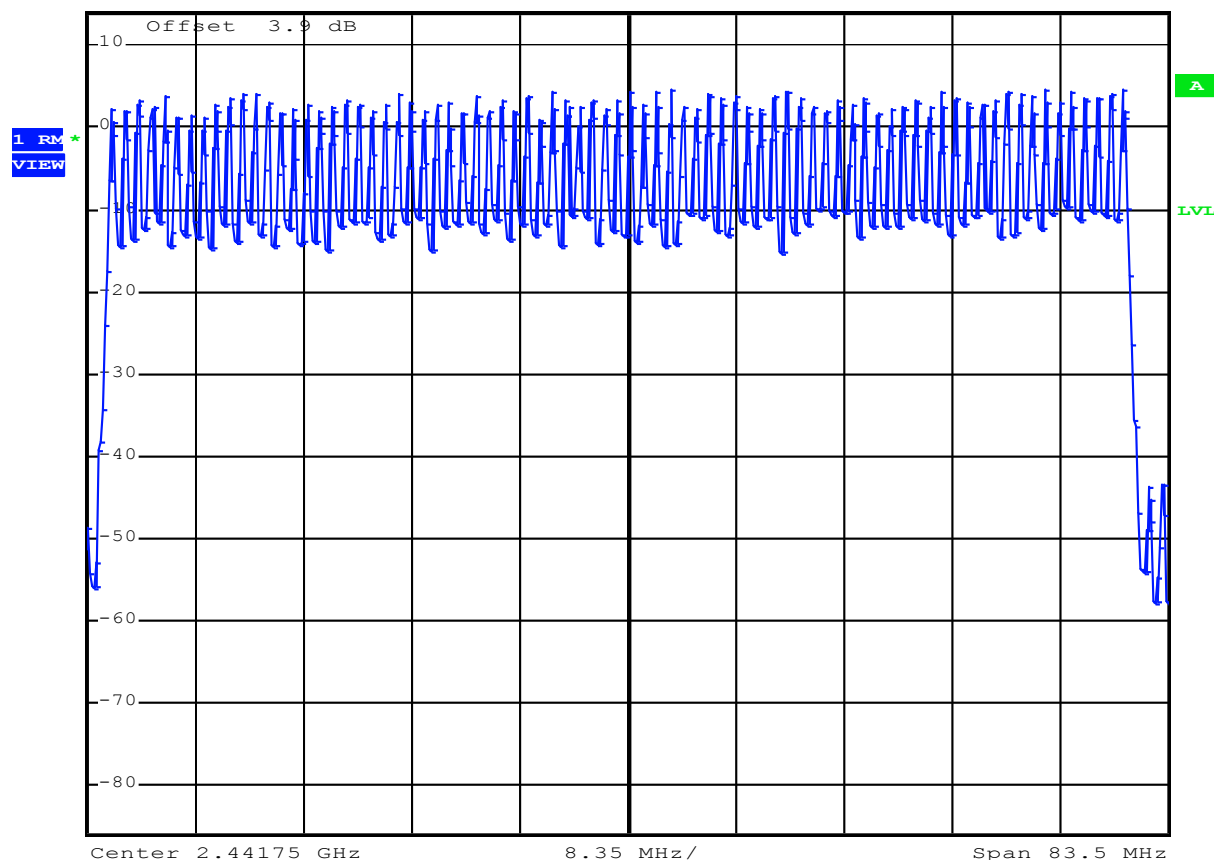


Date: 24.JAN.2013 14:49:51

Plot A: DH5 number of hopping channels is 79

Test Report No.:


**12121201.fcc04**

Page 26 of 43

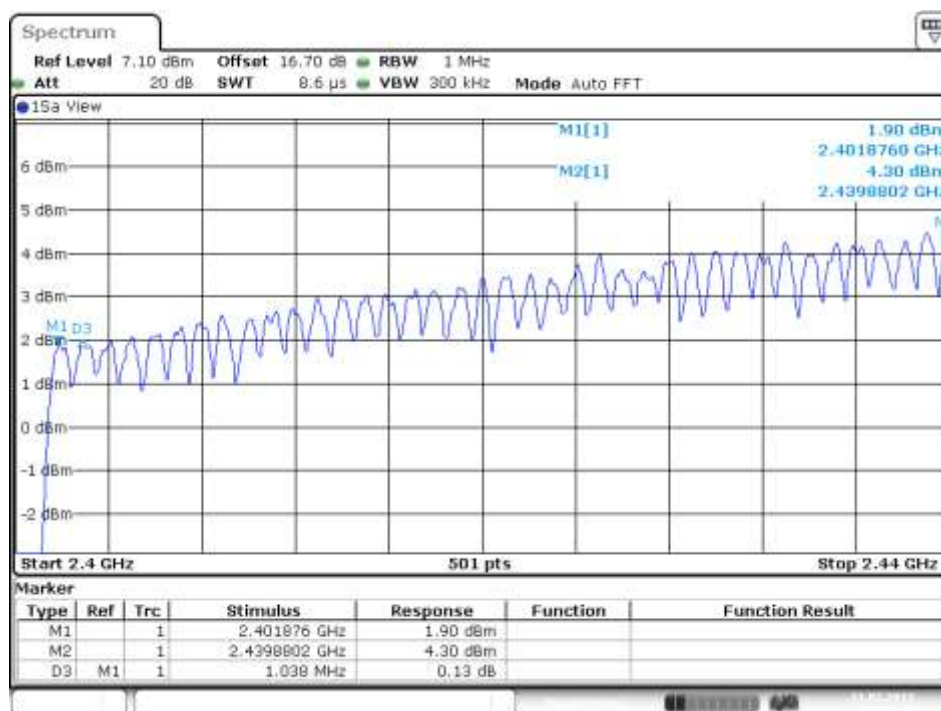

Date: 11.FEB.2013 14:55:18

Plot B: 3DH5 number of hopping channels is 39

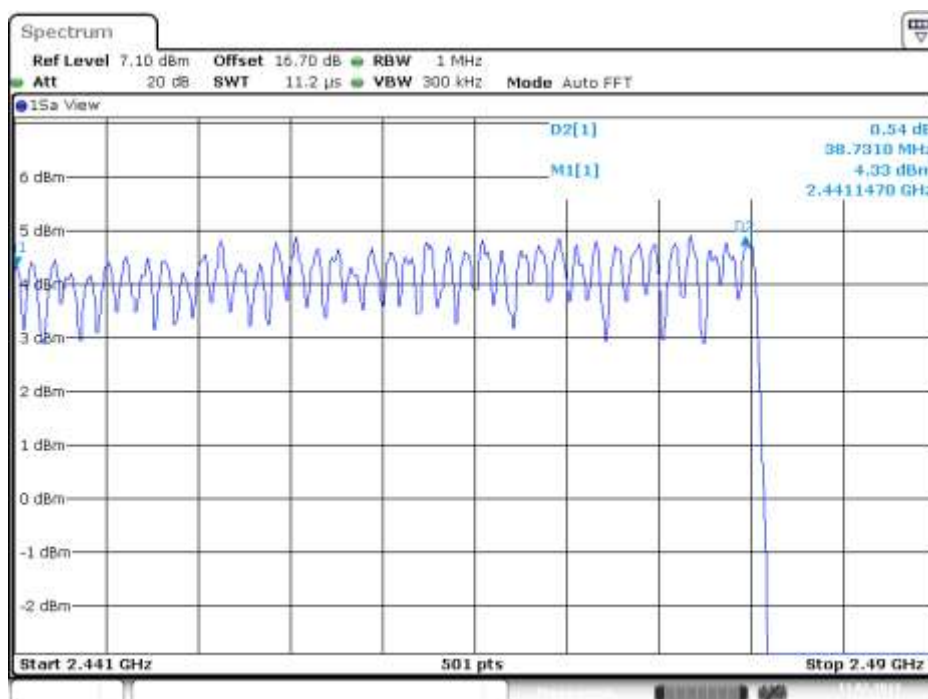

Date: 11.FEB.2013 14:58:11

Plot C: 3DH5 number of hopping channels is 40

Test Report No.:

**12121201.fcc04**

Page 27 of 43

## Channel Occupancy

### Specification

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed =  $0.4 \times 79 = 31.6$  seconds.


### Results

#### 1. TIME OF OCCUPANCY (DWEIL TIME) FOR PACKET TYPE DH5.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625us with 79 channels. A DH5 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case  $1600/2 = 800$  hops per second with 79 channels. So you have each channel  $800/79 = 10.127$  times per second and so for a period of  $0.4 \times 79 = 31.6$  seconds you have  $10.127 \times 31.6 = 320.0132$  times of appearance.

Each Tx-time per appearance is 2.881 ms (see next plot).

So we have  $320.0132 \times 2.881 \text{ ms} = 921.96 \text{ ms}$  per 30.4 seconds.

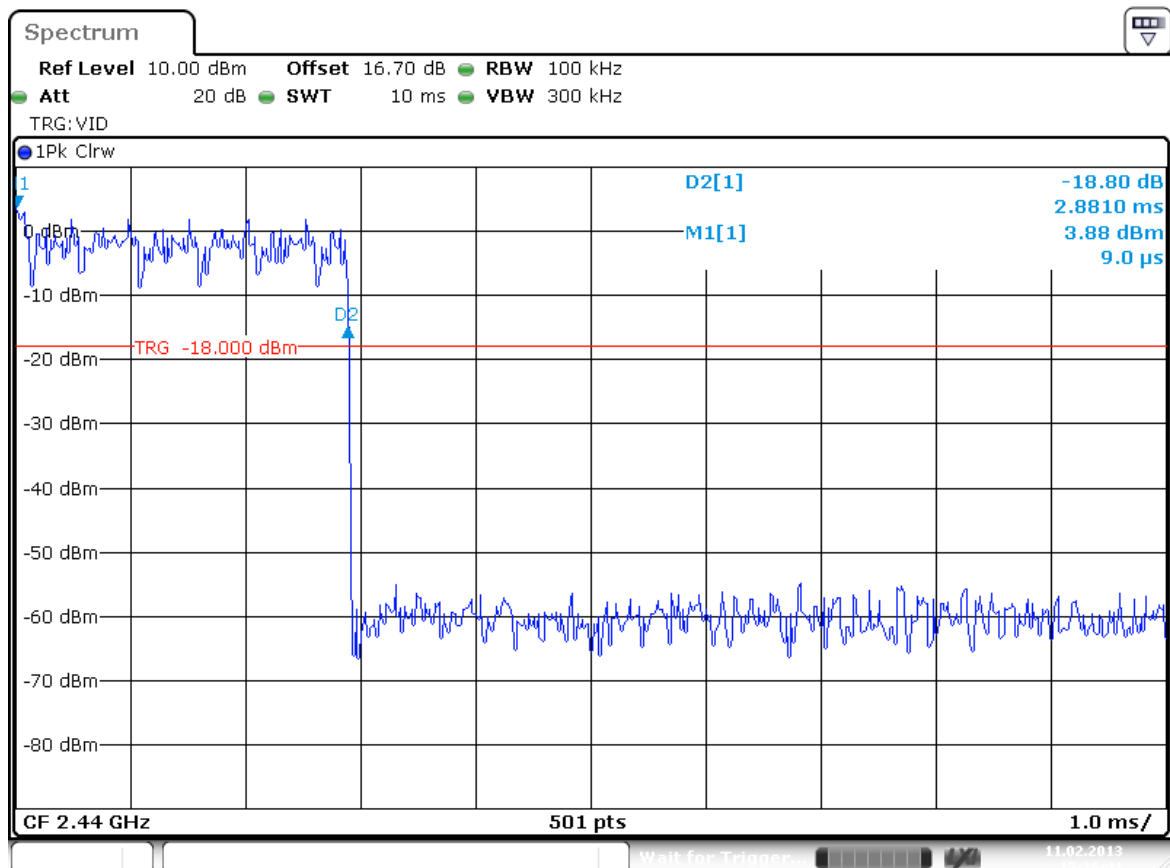

Date: 11.FEB.2013 15:26:42


Test Report No.:

**12121201.fcc04**

Page 28 of 43

## 2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE 3DH5.

The system makes worst case 1600 hops per second or 1 time slot has a length of 625us with 79 channels. A 3DH5 Packet need 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case  $1600/5 = 266.67$  hops per second with 79 channels. So you have each channel  $266.67/79 = 3.38$  times per second and so for a period of  $0.4 \times 79 = 31.6$  seconds you have  $3.38 \times 31.6 = 106.808$  times of appearance. Each Tx-time per appearance is 2.881 ms (see next plot). So we have  $106.808 \times 2.881 \text{ ms} = 307.71 \text{ ms}$  per 30.4 seconds.

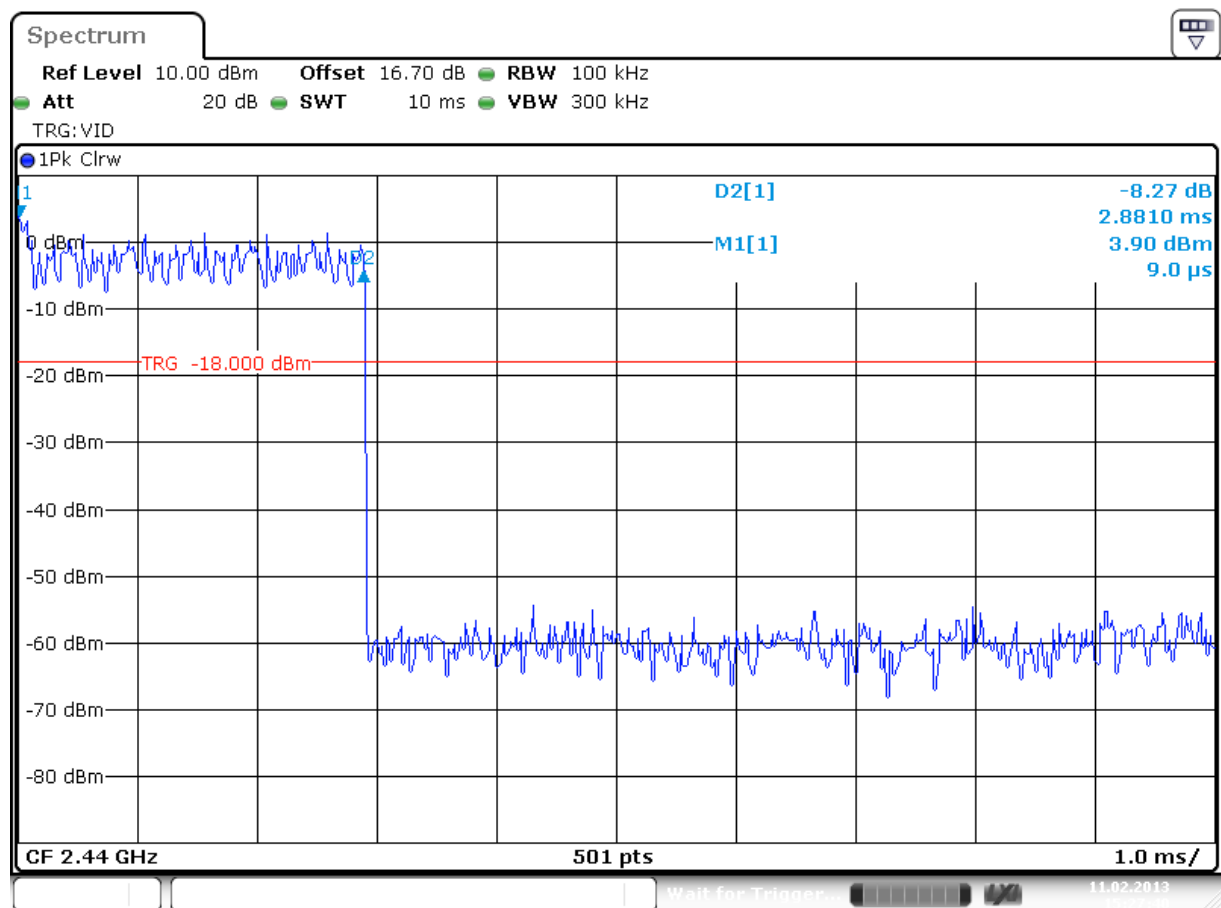

Date: 11.FEB.2013 15:27:41

Test Report No.:

**12121201.fcc04**

Page 29 of 43

## 5.2.4 Carrier Frequency Separation

**RESULT: PASS**

Date of testing: 2013-03-18

Requirements: FCC 15.247(a)(1) and RSS-210 A8.1(b)

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


Test procedure: ANSI C63.10-2009.

A spectrum analyzer was connected to the antenna port of the EUT. The Delta Marker function was used to determine the separation between the peaks of two adjacent channels.

Test Report No.:


**12121201.fcc04**

Page 30 of 43

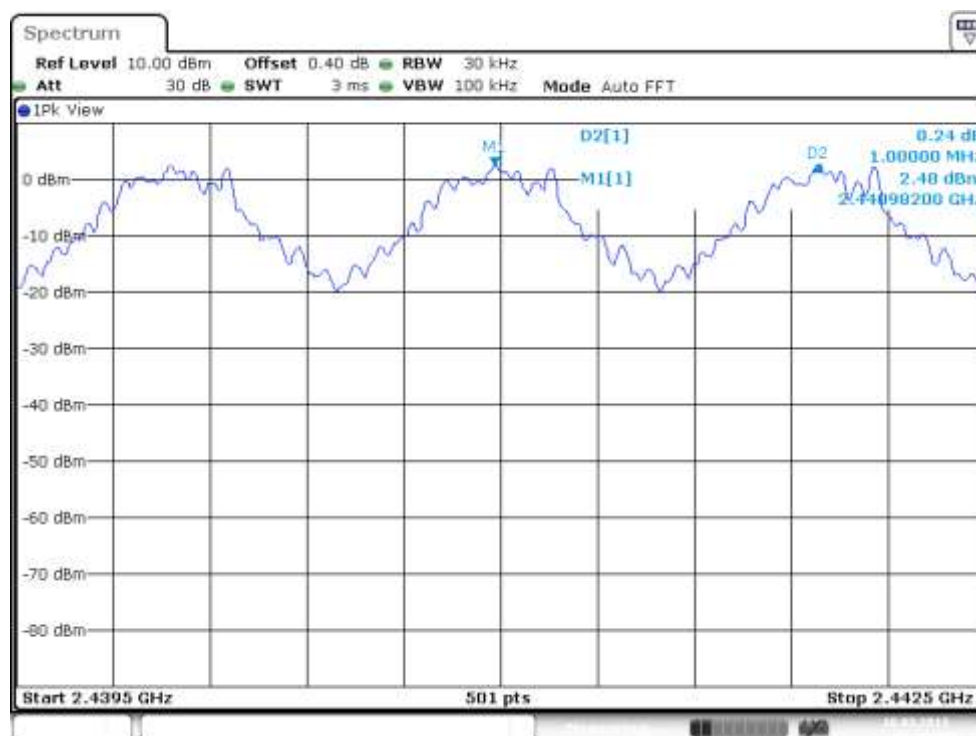

Date: 18.MAR.2013 15:46:16

Plot showing DH5 Carrier Frequency Separation of 1.000 MHz (limit= 25kHz or more).

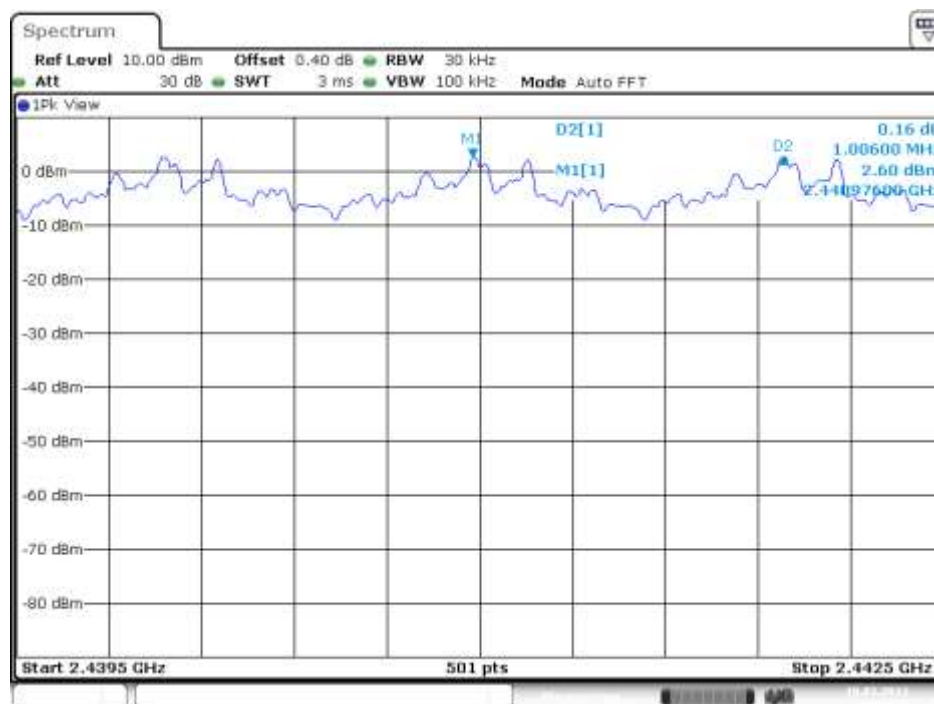

Date: 18.MAR.2013 15:44:25

Plot showing 3DH5 Carrier Frequency Separation of 1.006 MHz (limit= 25kHz or more).

Test Report No.:

**12121201.fcc04**

Page 31 of 43

## 5.2.5 Band Edge Conducted Emissions

**RESULT: Pass**

Date of testing: 2013-02-11

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure: ANSI C63.10-2009

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

Test Report No.:


**12121201.fcc04**

Page 32 of 43

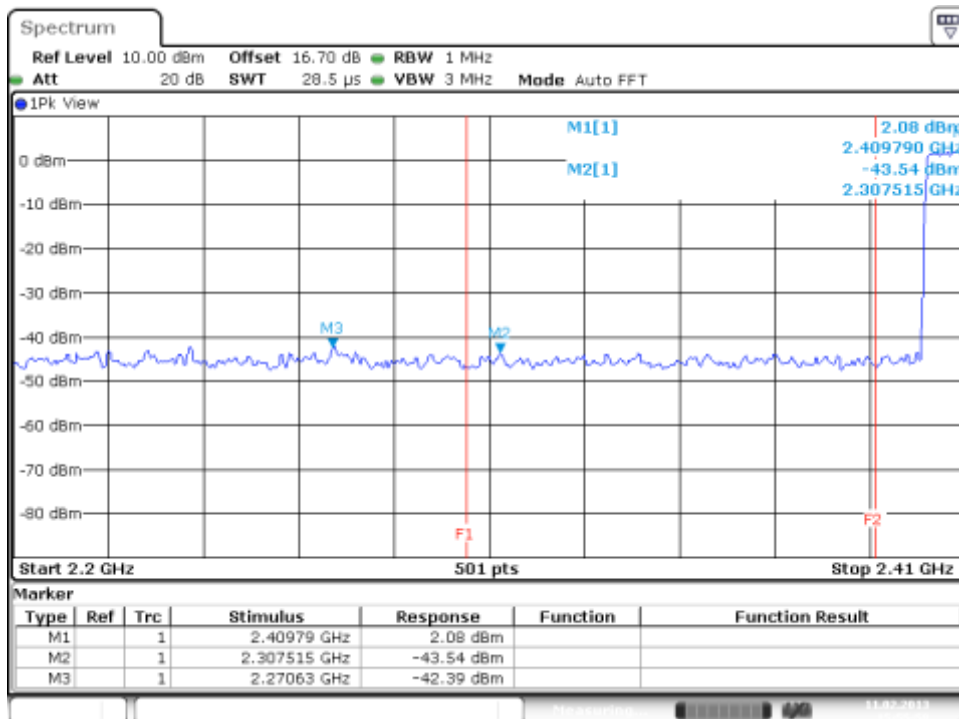

Date: 11.FEB.2013 15:55:58

Band Edge Conducted Emission- Lower band edge, Spectral Diagram, 2402 MHz- DH5- Antenna 1

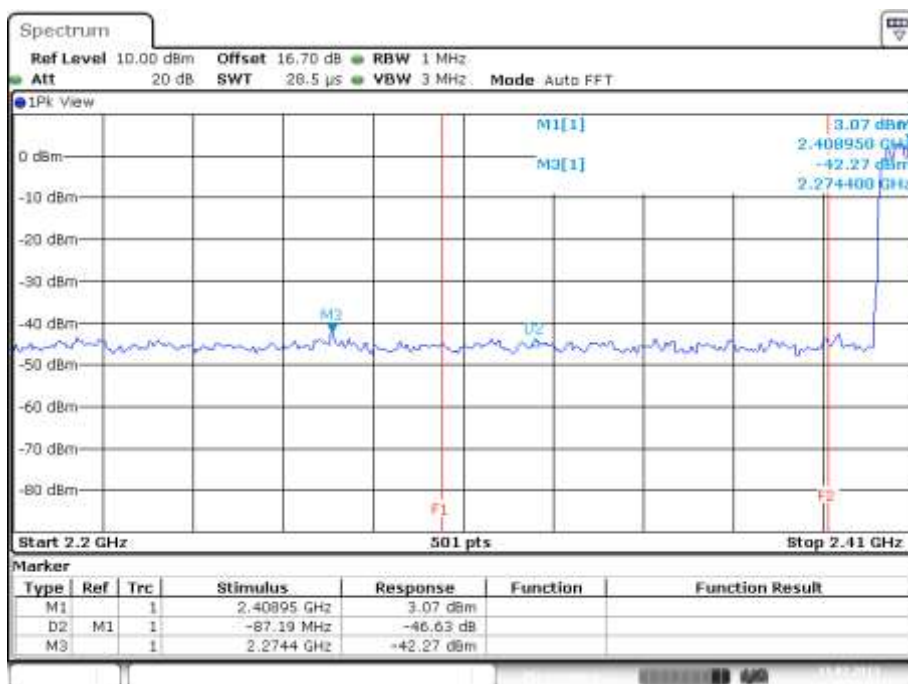

Date: 11.FEB.2013 15:52:35

Band Edge Conducted Emission- Lower band edge, Spectral Diagram, 2402 MHz-3DH5- Antenna 1



Test Report No.:


**12121201.fcc04**

Page 33 of 43



Date: 11.FEB.2013 15:58:09

Band Edge Conducted Emission- Higher band edge, Spectral Diagram, 2480 MHz-DH5-Antenna 1

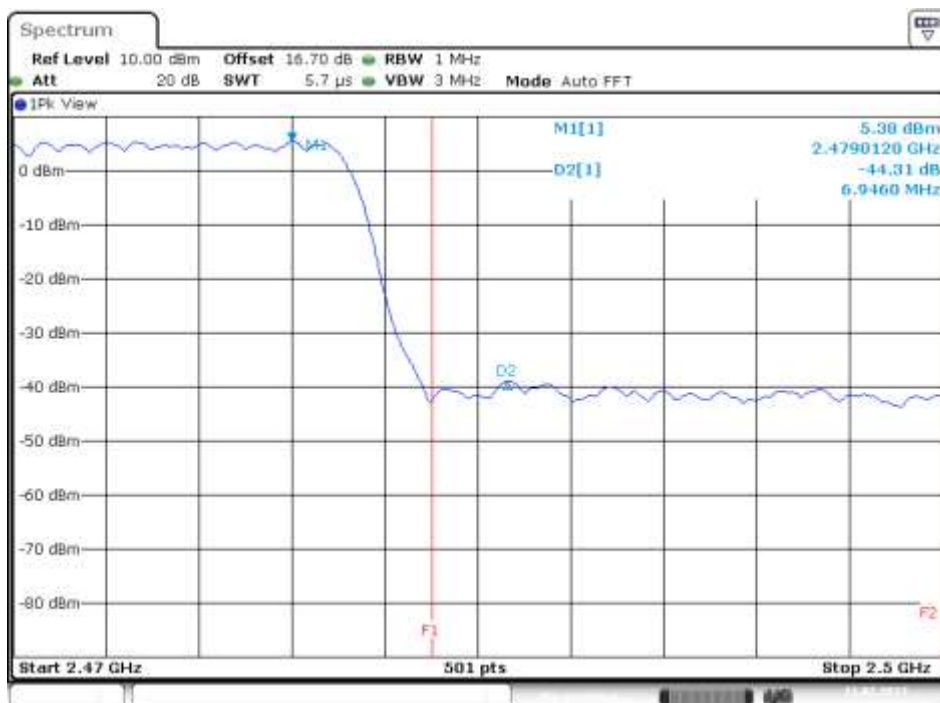

Date: 11.FEB.2013 16:00:38

Band Edge Conducted Emission- Higher band edge, Spectral Diagram, 2480 MHz-3DH5-Antenna 1

Test Report No.:

**12121201.fcc04**

Page 34 of 43

## 5.2.6 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2012-01-10

Frequency range: 30MHz - 25GHz

#### Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Test procedure: ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc04**

Page 35 of 43

**Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations**

| Freq.<br>[MHz] | Antenna<br>Orientation | Reading<br>QP<br>[dB $\mu$ V] | Factor<br>[dB(1/m)] | Level QP<br>[dB $\mu$ V/m] | Limit<br>[dB $\mu$ V/m] | Margin<br>QP<br>[dB] |
|----------------|------------------------|-------------------------------|---------------------|----------------------------|-------------------------|----------------------|
| 66.86          | Vertical               | 15.1                          | 5.4                 | 20.5                       | 40.0                    | 19.5                 |
| 111.48         | Vertical               | 13.6                          | 11.4                | 25.0                       | 43.5                    | 18.5                 |
| 253.10         | Vertical               | 13.7                          | 14.2                | 27.9                       | 46.0                    | 18.1                 |
| 774.96         | Vertical               | 14.7                          | 24.8                | 39.5                       | 46.0                    | 6.5                  |
| 844.80         | Vertical               | 15.3                          | 26.1                | 41.4                       | 46.0                    | 4.6                  |
| 922.40         | Vertical               | 15.4                          | 27.6                | 43.0                       | 46.0                    | 3.0                  |

Note: - Level QP = Reading QP + Factor  
- Tested in modes as described in section 4.2, highest values noted.  
- Quasi Peak detector used with a bandwidth of 120 kHz

Test Report No.:

**12121201.fcc04**

Page 36 of 43

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations,  
2402 MHz – DH5 – Antenna 1**

| Freq.<br>[MHz] | Antenna<br>Orientation | Detector | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] |
|----------------|------------------------|----------|-------------------|-------------------|----------------|
| 220.7          | Vertical               | Qp       | 35.7              | 43.5              | -7.8           |
| 708.6          | Vertical               | Qp       | 37.2              | 46.0              | -8.8           |
| 848.0          | Vertical               | Qp       | 36.6              | 46.0              | -9.4           |
| 952.6          | Vertical               | Qp       | 37.1              | 46.0              | -8.9           |
| 4804           | Vertical               | Pk       | 28.2              | 54.0              | -25.8          |
| 12750          | Vertical               | Pk       | 25.2              | 54.0              | -28.8          |

Note:

- Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations,  
2440 MHz – DH5 – Antenna 1**

| Freq.<br>[MHz] | Antenna<br>Orientation | Detector | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] |
|----------------|------------------------|----------|-------------------|-------------------|----------------|
| 222.5          | Vertical               | Qp       | 34.6              | 43.5              | -8.9           |
| 433.5          | Vertical               | Qp       | 34.9              | 46.0              | -11.1          |
| 710.5          | Vertical               | Qp       | 37.1              | 46.0              | -8.9           |
| 848.0          | Vertical               | Qp       | 36.2              | 46.0              | -9.8           |
| 4880           | Vertical               | Pk       | 31.3              | 54.0              | -22.7          |
| 12750          | Vertical               | Pk       | 25.5              | 54.0              | -28.8          |

Note:

- Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc04**

Page 37 of 43

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations,  
2480 MHz – DH5 – Antenna 1**

| Freq.<br>[MHz] | Antenna<br>Orientation | Detector | Level<br>[dB $\mu$ V/m] | Limit<br>[dB $\mu$ V/m] | Margin<br>[dB] |
|----------------|------------------------|----------|-------------------------|-------------------------|----------------|
| 242.0          | Vertical               | Qp       | 34.9                    | 43.5                    | -8.6           |
| 532.4          | Vertical               | Qp       | 36.1                    | 46.0                    | -9.9           |
| 710.5          | Vertical               | Qp       | 36.1                    | 46.0                    | -9.9           |
| 846.1          | Vertical               | Qp       | 36.3                    | 46.0                    | -9.7           |
| 4960           | Vertical               | Pk       | 22.3                    | 54.0                    | -31.7          |
| 12750          | Vertical               | Pk       | 25.2                    | 54.0                    | -28.8          |

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations,  
2402 MHz – 3DH5 – Antenna 1**

| Freq.<br>[MHz] | Antenna<br>Orientation | Detector | Level<br>[dB $\mu$ V/m] | Limit<br>[dB $\mu$ V/m] | Margin<br>48[dB] |
|----------------|------------------------|----------|-------------------------|-------------------------|------------------|
| 120.0          | Vertical               | Qp       | 35.7                    | 43.5                    | -7.8             |
| 528.6          | Horizontal             | Qp       | 35.8                    | 46.0                    | -10.2            |
| 710.5          | Vertical               | Qp       | 37.5                    | 46.0                    | -8.5             |
| 846.1          | Vertical               | Qp       | 37.6                    | 46.0                    | -8.4             |
| 4804           | Horizontal             | Pk       | 39.8                    | 54.0                    | -14.2            |
| 12750          | Vertical               | Pk       | 25.2                    | 54.0                    | -28.8            |

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc04**

Page 38 of 43

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations, 2440 MHz – 3DH5 – Antenna 1**

| Freq. [MHz] | Antenna Orientation | Detector | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-------------|---------------------|----------|----------------|----------------|-------------|
| 47.1        | Vertical            | Qp       | 23.4           | 43.5           | -20.1       |
| 237.5       | Vertical            | Qp       | 21.3           | 46.0           | -24.7       |
| 371.0       | Vertical            | Qp       | 19.3           | 46.0           | -26.7       |
| 850.0       | Horizontal          | Qp       | 27.5           | 46.0           | -18.5       |
| 4880        | Vertical            | Pk       | 32.0           | 54.0           | -22.0       |
| 12750       | Vertical            | Pk       | 25.2           | 54.0           | -28.8       |

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
 - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
 - Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations, 2480 MHz – 3DH5 – Antenna 1**

| Freq. [MHz] | Antenna Orientation | Detector | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-------------|---------------------|----------|----------------|----------------|-------------|
| 47.1        | Vertical            | Qp       | 23.3           | 43.5           | -20.2       |
| 237.5       | Vertical            | Qp       | 21.5           | 46.0           | -24.5       |
| 371.0       | Vertical            | Qp       | 19.9           | 46.0           | -26.1       |
| 848.5       | Horizontal          | Qp       | 28.1           | 46.0           | -17.9       |
| 4960        | Vertical            | Pk       | 28.6           | 54.0           | -25.4       |
| 12249       | Vertical            | Pk       | 25.2           | 54.0           | -28.8       |

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
 - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
 - Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc04**

Page 39 of 43

## 5.2.7 Radiated Spurious Emissions of Transmitter in restricted bands

**RESULT: Pass**

Date of testing:

2013-01-10 and 2013-02-04

Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure: ANSI C63.10-2009.

| Frequency Range (MHz) | Field strength (μV/m) | Field strength (dBμV/m) | Detector   | Measurement distance (m) |
|-----------------------|-----------------------|-------------------------|------------|--------------------------|
| 0.009-0.490           | 2400/F(kHz)           | 43.5 > 13.8             | Average    | 300                      |
| 0.490-1.705           | 24000/F(kHz)          | 33.8 > 22.9             | Average    | 300                      |
| 1.705 - 30.0          | 30                    | 29.5                    | Quasi peak | 30                       |
| 30 - 88               | 100                   | 40.0                    | Quasi peak | 3                        |
| 88 - 216              | 150                   | 43.5                    | Quasi peak | 3                        |
| 216 - 960             | 200                   | 46.0                    | Quasi peak | 3                        |
| 960 - 25000           | 500                   | 54.0                    | Average    | 3                        |

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 4.5-5.15 GHz and 5.35-5.46 GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc04**

Page 40 of 43

Correction factors are incorporated in the spectrum analyzers as an automated function.  
Refer to section 4.2 for the power settings and modes.  
Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

| Operating frequency [GHz] | Operation mode | Restricted frequency band [GHz] | Antenna Orientation | Frequency of the highest peak in the restricted band [GHz] | Level Pk of the highest peak in the restricted band [dBμV/m] | Limit [dBμV/m] |
|---------------------------|----------------|---------------------------------|---------------------|------------------------------------------------------------|--------------------------------------------------------------|----------------|
| 2.402                     | DH5            | 2.31 – 2.39                     | Vertical            | 2.3720                                                     | 43.6                                                         | 54             |
| 2.440                     | DH5            | 2.31 – 2.39                     | Vertical            | 2.3729                                                     | 43.5                                                         | 54             |
| 2.480                     | DH5            | 2.31 – 2.39                     | Vertical            | 2.3835                                                     | 45.6                                                         | 54             |
| 2.402                     | 3DH5           | 2.4835-2.5                      | Vertical            | 2.3598                                                     | 45.9                                                         | 54             |
| 2.440                     | 3DH5           | 2.4835-2.5                      | Vertical            | 2.3604                                                     | 43.1                                                         | 54             |
| 2.480                     | 3DH5           | 2.4835-2.5                      | Vertical            | 2.4920                                                     | 48.4                                                         | 54             |

The highest peak in the restricted band is noted for each operating frequency.



Test Report No.:

**12121201.fcc04**

Page 41 of 43

## 5.3 Spurious emissions in receive mode

### RESULT: Pass

Date of testing: 2013-01-10

Requirements: RSS-Gen

Radiated emissions from receiver shall not exceed the radiated limits in the table below.

| Freq. [MHz] | Detector | Measurement Bandwidth | Limit [dBµV/m] |
|-------------|----------|-----------------------|----------------|
| 30 – 88     | Qp       | 120 kHz               | 40.0           |
| 88 – 216    | Qp       | 120 kHz               | 43.5           |
| 216 – 960   | Qp       | 120 kHz               | 46.0           |
| Above 916   | Av       | 1 MHz                 | 54.0           |

Test procedure: **Error! Reference source not found.**ANSI C63.10-2009, RSS-Gen section 4.10

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30 MHz to 7500 MHz. Emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations.

The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc04**

Page 42 of 43

Results:

| Freq.<br>[MHz] | Antenna<br>Orientation | Detector/<br>Bandwidth | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] |
|----------------|------------------------|------------------------|-------------------|-------------------|----------------|
| 47.1           | Vertical               | Qp / 120 kHz           | 37.4              | 40.0              | -2.6           |
| 64.9           | Vertical               | Qp / 120 kHz           | 36.7              | 43.5              | -6.8           |
| 237.5          | Vertical               | Qp / 120 kHz           | 32.4              | 46.0              | -13.6          |
| 466.0          | Vertical               | Qp / 120 kHz           | 35.2              | 46.0              | -10.8          |
| 4824           | Vertical               | Av / 1 MHz             | 38.9              | 54.0              | -15.1          |
| 6436           | Vertical               | Av / 1 MHz             | 36.4              | 54.0              | -17.6          |

Note: - tested up to 3 times highest tunable frequency (which is 2480 MHz), up to 7.5 GHz.  
- the EUT was tested in receive mode, set at center frequency of 2440 MHz.  
- tested with DH5 and 3DH5, worst case values noted

Test Report No.:

**12121201.fcc04**

Page 43 of 43

## **5.4 AC Power Line Conducted Measurements**

### **5.4.1 AC Power Line Conducted Emission of Transmitter**

AC power line conducted emissions are included in the Part 15B/ICES-003 testreport.  
Refer to documentnumber 13e\_PD97260NGW\_Testreport\_FCC-15B-ICES003.pdf

End of report