



# FCC/IC Test Report

**FOR:**

**Model Name: Fusion**  
**Ambulatory Arrhythmia Monitoring System**

**FCC ID: HMFUSIONMCT**  
**IC ID: 9158A FUSION**

**47 CFR Part 15.247 for FHSS Systems**  
**IC RSS-210 Issue 8**

**TEST REPORT #: EMC\_BRAEM\_008\_10001\_15.247BT**  
**DATE: 2010-12-14**



**Bluetooth**  
Bluetooth Qualification  
Test Facility  
(BQTF)

**CTIA Authorized Test Lab**  
LAB CODE 20020328-00

FCC listed  
A2LA Accredited

IC recognized #  
3462B

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686  
Board of Directors: Dr. Harald Ansorge, Hans Peter May

## **TABLE OF CONTENTS**

<b>1</b>	<b>Assessment .....</b>	<b>4</b>
<b>2</b>	<b>Administrative Data.....</b>	<b>5</b>
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report.....	5
2.2	Identification of the Client .....	5
2.3	Identification of the Manufacturer .....	5
<b>3</b>	<b>Equipment under Test (EUT).....</b>	<b>6</b>
3.1	Specification of the Equipment under Test.....	6
3.2	Identification of the Equipment Under Test (EUT) .....	7
3.3	Identification of Accessory equipment .....	7
<b>4</b>	<b>Subject of Investigation .....</b>	<b>8</b>
<b>5</b>	<b>Summary of Measurement Results .....</b>	<b>9</b>
<b>6</b>	<b>Measurements.....</b>	<b>10</b>
6.1	Radiated Measurement Procedure.....	10
6.2	Maximum Peak Output Power .....	12
6.2.1	<i>References: .....</i>	12
6.2.2	<i>Measurement requirements: .....</i>	12
6.2.3	<i>Limits: .....</i>	12
6.2.4	<i>Test Conditions:.....</i>	12
6.2.5	<i>Test Result: .....</i>	13
6.2.6	<i>Test Data/plots: .....</i>	14
6.3	Restricted Band Edge Compliance.....	17
6.3.1	<i>References: .....</i>	17
6.3.2	<i>Limits: §15.247/15.205 .....</i>	17
6.3.3	<i>Measurement Procedure: .....</i>	17
6.3.4	<i>Test Data/plots: .....</i>	18
6.4	Transmitter Spurious Emissions- Radiated .....	22
6.4.1	<i>References: .....</i>	22
6.4.2	<i>Measurement requirements: .....</i>	22
6.4.3	<i>Limits: .....</i>	22
6.4.4	<i>Test Result: .....</i>	23
6.4.5	<i>Test data/ plots: .....</i>	24
6.4.6	<i>Limits: .....</i>	38
6.4.7	<i>Test Conditions:.....</i>	38
6.4.8	<i>Test Result: .....</i>	38
6.4.9	<i>Test data/ plots: .....</i>	39
6.5	AC Power Line Conducted Emissions .....	44
6.5.1	<i>References: .....</i>	44
6.5.2	<i>Limits: .....</i>	44
6.5.3	<i>Test Conditions:.....</i>	44
6.5.4	<i>Results.....</i>	45

<b>7</b>	<b>Test Equipment and Ancillaries used for tests.....</b>	<b>46</b>
<b>8</b>	<b>Test Setup Info: .....</b>	<b>47</b>
<b>9</b>	<b>Revision History .....</b>	<b>48</b>

## **1 Assessment**

**The following device was tested against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8 and no deviations were ascertained during the course of the tests performed.**

<b>Company</b>	<b>Description</b>	<b>Model #</b>
Braemar Inc.	Ambulatory Arrhythmia Monitoring System	Fusion

### **Responsible for Testing Laboratory:**

2010-12-14	Compliance	Marc Douat (Test Lab Manager)
------------	------------	----------------------------------

### **Responsible for the Report:**

2010-12-14	Compliance	Christopher Torio (EMC Engineer)
------------	------------	-------------------------------------

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Address:</b>	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Test Lab Director:</b>	Heiko Strehlow
<b>Responsible Project Leader:</b>	Clarence Ip

### **2.2 Identification of the Client**

<b>Applicant's Name:</b>	Braemar Inc.
<b>Street Address:</b>	1285 Corporate Center Drive
<b>City/Zip Code</b>	Eagan, MN 55121
<b>Country</b>	USA
<b>Contact Person:</b>	Paul Brinda
<b>Phone No.</b>	651-286-8620
<b>Fax:</b>	651-286-8630
<b>e-mail:</b>	<a href="mailto:Paul.Brinda@braemarinc.com">Paul.Brinda@braemarinc.com</a>

### **2.3 Identification of the Manufacturer**

Same as above

### **3 Equipment under Test (EUT)**

#### **3.1 Specification of the Equipment under Test**

<b>Marketing Name / Model No:</b>	Fusion / Fusion
<b>HW / SW Revision :</b>	520 / 7.43
<b>FCC-ID / IC-ID:</b>	HHMFUSIONMCT / 9158A FUSION
<b>Product Description:</b>	<b>Fusion Wireless Recorder</b> - a battery operated, solid state recorder designed to record symptomatic heart arrhythmias. Incorporates pre-certified Quad Band GSM/GPRS/EGPRS module with FCC-ID: N7NQ2687 PP, pre-certified Bluetooth v2.1+EDR module with FCC ID: T9JRN41-1
<b>Frequency Range / number of channels:</b>	GSM 850: 824.2-848.8MHz / 125; PCS 1900: 1850.2-1909.8MHz / 300; Bluetooth: 2400-2483.5MHz / 79;
<b>Type(s) of Modulation:</b>	2G: GMSK, 8PSK; Bluetooth: GFSK, DQPSK, 8DPSK;
<b>Modes of Operation:</b>	GPRS/EGPRS MS Class 10, GPRS Capability Class B, Data only
<b>Antenna Type / gain / position / min. distance to other antenna (if appl):</b>	GSM: Wire ¼ Wave Antenna / 850band 1dBi, 1900 band 1.5 dBi; Bluetooth: Integral Chip antenna / -2.83dBi; distance GSM-BT antennas: 4mm (measured, see appendix C);
<b>Output Powers:</b>	GSM850 GMSK Conducted: 32.0 dBm, 1584.9mW; GSM850 8PSK Conducted: 29.4dBm, 871.0mW; GSM850 GMSK Radiated: 33.02dBm, 2004.5mW; GSM850 8PSK Radiated: 30.9dBm, 1230.3mW; GSM1900 GMSK Conducted: 29.5dBm, 891.3mW; GSM1900 8PSK Conducted: 28.6dBm, 724.4mW; GSM1900 GMSK Radiated: 31.01dBm, 1261.8mW; GSM1900 8PSK Radiated: 29.91dBm, 979.5mW; Bluetooth EDR conducted: 10.14 dBm; <i>conducted values are from module test reports</i>
<b>power supply</b>	AA lithium battery pack (dedicated), 3.6V DC;
<b>operating temperature range</b>	0°C to 45°C
<b>Prototype / Production unit</b>	Production

### **3.2 Identification of the Equipment Under Test (EUT)**

EUT #	Serial Number	HW Version	SW Version	Notes/Comments	Cetecom ID
<b>1</b>	01000129	520	7.43	None	C007401

### **3.3 Identification of Accessory equipment**

AE #	Type	Manufacturer	Model	Cetecom ID
<b>1</b>	Battery	Braemar, Inc	ER14505M	C007402

#### **4 Subject of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 8.

This test report is to support a request for new equipment authorization under the FCC ID

**HHMFUSIONMCT** and IC ID **9158A-FUSION**

All testing was performed on the product referred to in Section 3 as EUT.

This test report contains full radiated testing results as per

- 47 CFR Part 15: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter A- General, Part 15- Radio Frequency Devices.
- RSS-210 Issue 8: Spectrum Management and Telecommunications- Radio Standards Specification. Low-power Licence-exempt radio communication devices (All frequency bands): Category 1 equipment.

*The conducted measurements are covered under test report# W6M120703-7876-P-15 which can be found on <http://www.fcc.gov/oet/ea/fccid/> and entering the Bluetooth module's FCC ID: T9JRN41-1.*

During the testing process the EUT was tested on a single channel using PRBS payload using DH5 packet, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

**All radiated test results were taken on 2009-02-05. The results are valid since there were not any hardware changes in regards to the Bluetooth.**

This document replaces “EMC\_BRAEM\_005\_08001\_15.247BT” issued “2009-03-15”

**5 Summary of Measurement Results**

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(b)(4) RSS210 A8.4(2)	Antenna Gain	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(e) RSS210 A8.2(b)	Power Spectral Density	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(a)(1) RSS210 A8.1(b)	Carrier Frequency Separation	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(a)(1) RSS210 A8.1(d)	Number of Hopping Channels	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(a)(1)(iii) RSS210 A8.3(1)	Time of occupancy	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(a)(1) RSS210 A8.2(a)	Spectrum Bandwidth	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(b)(1) RSS210 A8.4(2)	Maximum Output Power	Nominal	GFSK	■	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.247(d) RSS210 A8.5	Band edge compliance-Conducted	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.247(d) RSS210 A8.5	Band edge compliance-Radiated	Nominal	GFSK	■	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Conducted	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	■	Not Performed
§15.209(a) RSS Gen	TX Spurious Emissions Radiated<30MHz	Nominal	GFSK	■	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.109 RSS Gen	RX Spurious Emissions Radiated	Nominal	GFSK	■	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.107(a)	Conducted Emissions <30MHz	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	■	<input type="checkbox"/>	Not Applicable

Note: NA= Not Applicable; NP= Not Performed.

*The conducted measurements are covered under test report# W6M120703-7876-P-15 which can be found on <http://www.fcc.gov/oet/ea/fccid/> and entering the Bluetooth module's FCC ID: T9JRN41-1.*

1. Band Edge compliance-conducted is NOT PERFORMED as the device passes radiated measurement.
2. Power Spectral Density is NOT APPLICABLE for devices with hopping functionality.

## **6 Measurements**

### **6.1 Radiated Measurement Procedure**

#### **ANSI C63.4 Section 8.3.1.1: Exploratory radiated emission measurements**

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

**ANSI C63.4 Section 8.3.1.2: Final radiated emission measurements**

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

**NOTES**

1—Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.

3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

## **6.2 Maximum Peak Output Power**

### **6.2.1 References:**

**FCC CFR §2.1046**

**RSS-Gen 4.8**

### **6.2.2 Measurement requirements:**

#### **6.2.2.1 FCC 2.1046: RF power output.**

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### **6.2.2.2 RSS-Gen 4.8: RF power output.**

Transmitter output power measurements shall be carried out before the unwanted emissions test. The transmitter output power value, obtained from this test, serves as the reference level used to determine the unwanted emissions.

### **6.2.3 Limits:**

#### **6.2.3.1 §15.247 (b)(1)**

The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.  
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### **6.2.3.2 RSS 210- A8.4(2)**

Nominal Peak Output Power < 30 dBm (1W)

### **6.2.4 Test Conditions:**

T<sub>nom</sub>: 25°C; V<sub>nom</sub>: 3.6V

Hopping OFF

#### **Spectrum Analyzer settings:**

RBW=VBW=3MHz, Detector: Peak- Max Hold.

Sweep Time: Auto

Span=3MHz

**6.2.5 Test Result:**

<b>Max Peak Output Power- Radiated (dBm)</b>			
<b>Modulation</b>	<b>Frequency (MHz)</b>		
	<b>2402</b>	<b>2441</b>	<b>2480</b>
<b>GFSK</b>	-0.9	-0.37	0.98
Measurement Uncertainty: $\pm 3.0\text{dB}$			

**6.2.5.1 Measurement Result**

Pass.


### **6.2.6 Test Data/plots:**

#### **Radiated Peak Power GFSK 2402 MHz**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

##### ***SWEET TABLE: "EIRP BT low channel"***

Short Description:		EIRP Bluetooth channel-2402MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.4 GHz	MaxPeak	Coupled	3 MHz DUMMY-DBM
		MaxPeak		

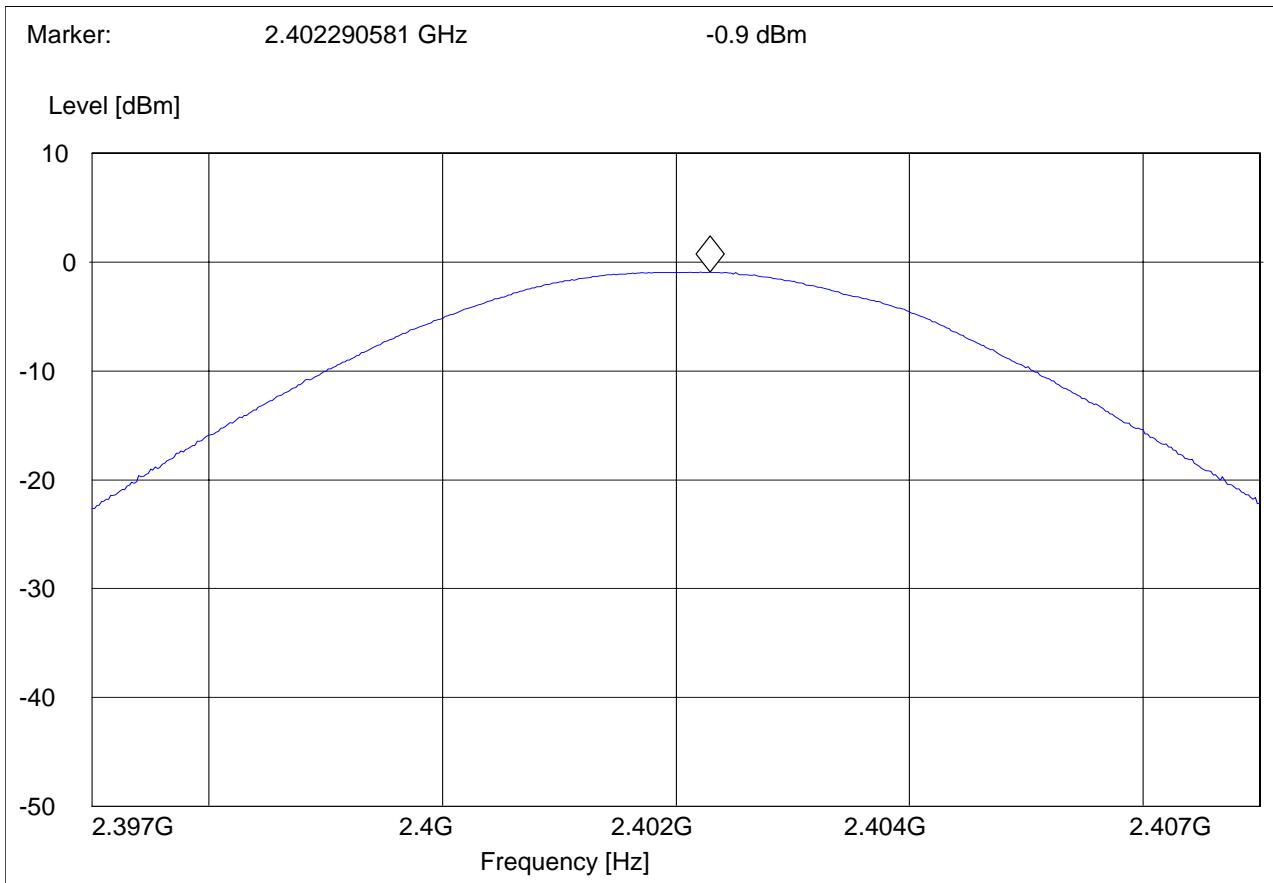


## Radiated Peak Power GFSK 2441 MHz

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.39; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

### ***SWEET TABLE: "EIRP BT mid channel"***

Short Description:		EIRP Bluetooth channel-2441MHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.4 GHz	2.4 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

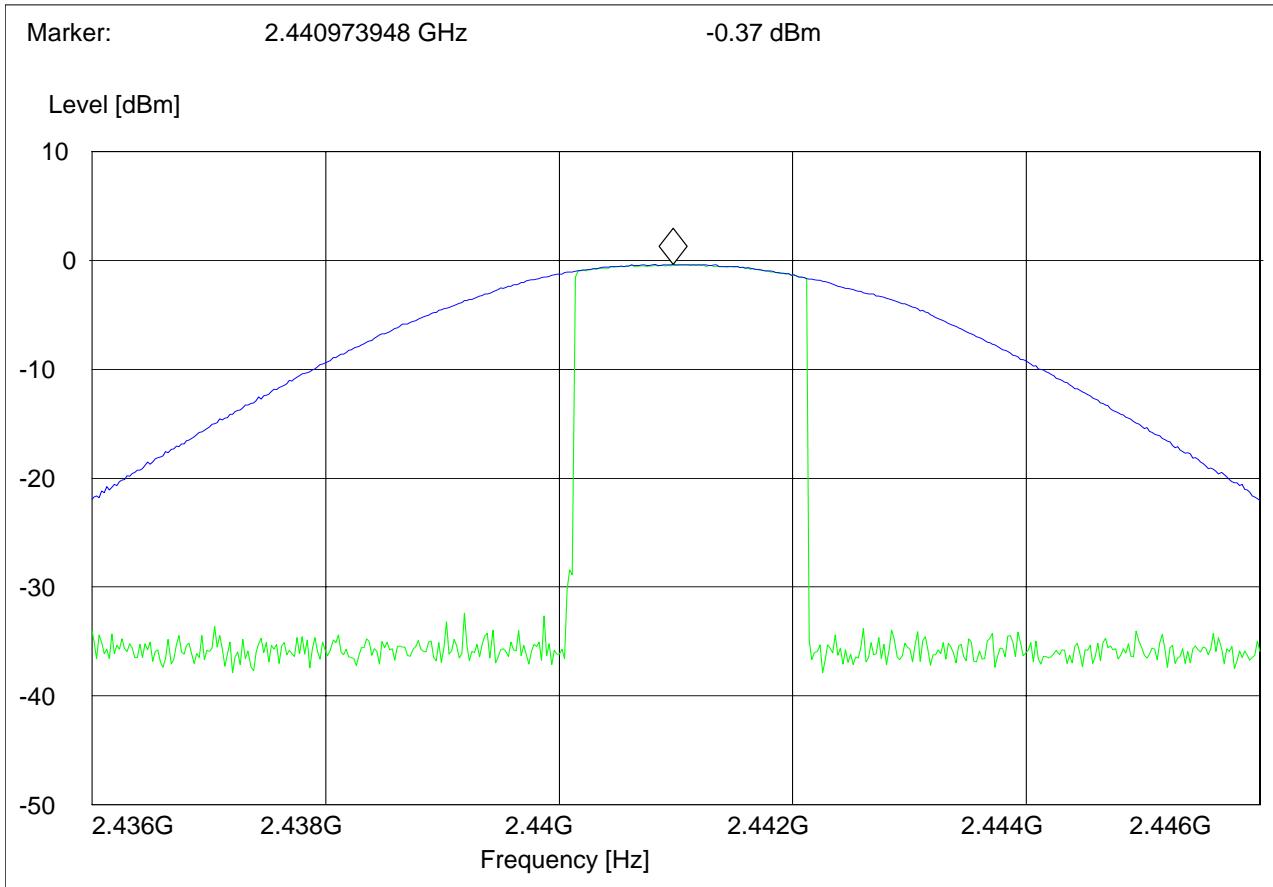


## Radiated Peak Power GFSK 2480 MHz

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

### ***SWEET TABLE: "EIRP BT high channel"***

Short Description:		EIRP Bluetooth channel-2480MHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

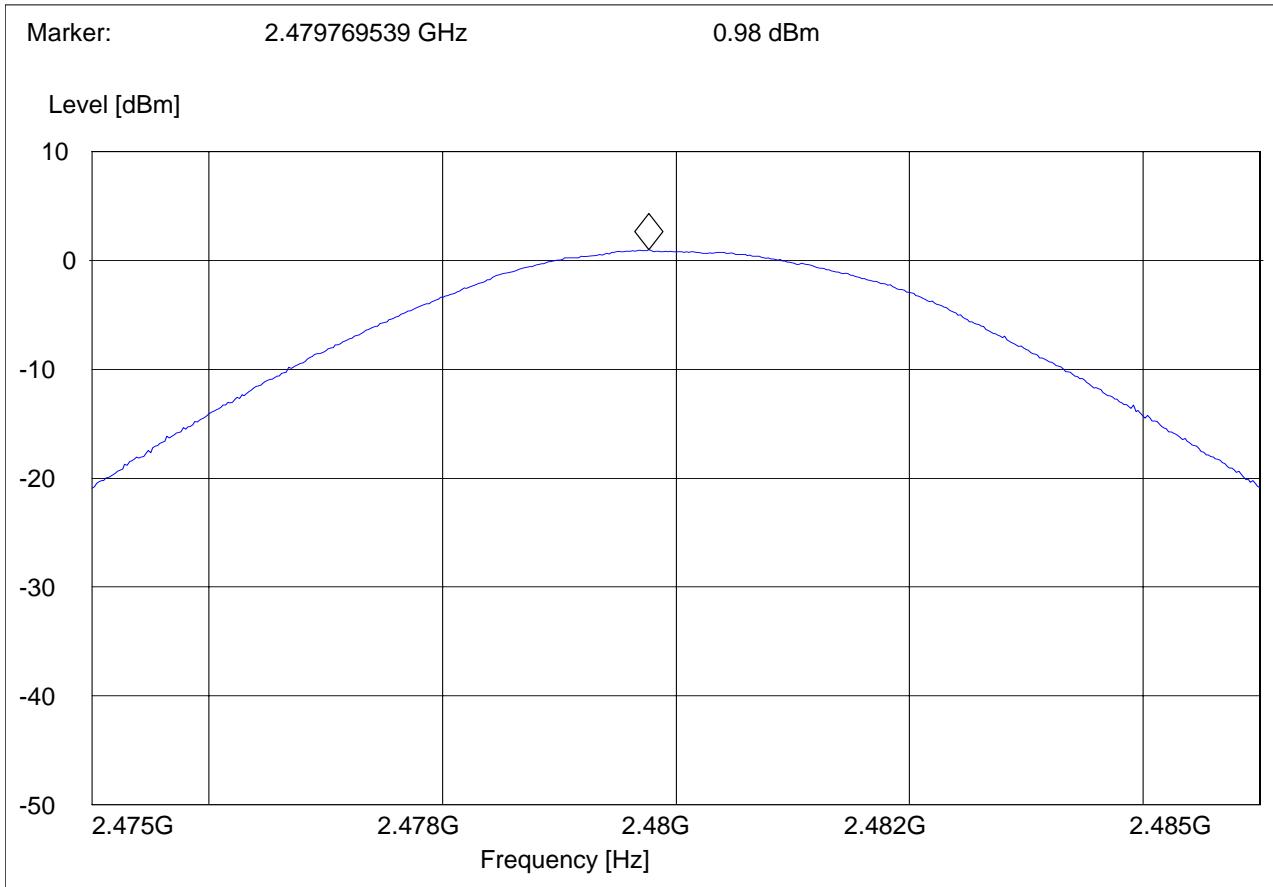

### 6.3 Restricted Band Edge Compliance

#### 6.3.1 References:

FCC CFR §2.1053

RSS-210 A8.5

#### 6.3.2 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 6.3.3 Measurement Procedure:

Peak measurements are made using a peak detector and RBW=1MHz.

Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz.

\*PEAK LIMIT= 74dB $\mu$ V/m

\*AVG. LIMIT= 54dB $\mu$ V/m

Measurement Uncertainty:  $\pm 3.0$ dB

##### 6.3.3.1 Measurement Result

Pass.


### **6.3.4 Test Data/plots:**

#### **Lower band edge peak -GFSK modulation**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

#### ***SWEET TABLE: "FCC15.247 LBE\_PK"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

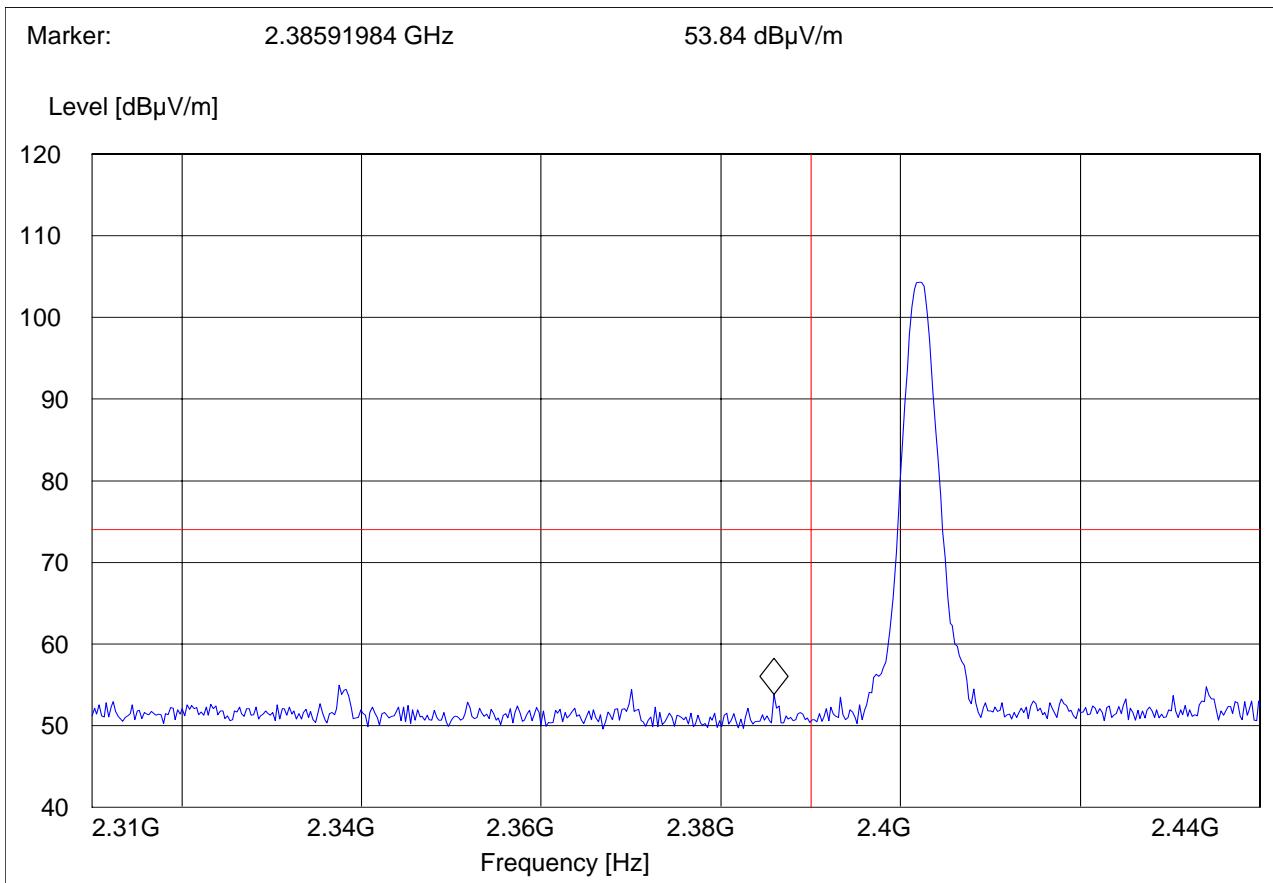


## Lower band edge average -GFSK modulation

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEEP TABLE: "FCC15.247 LBE\_AVG"***

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

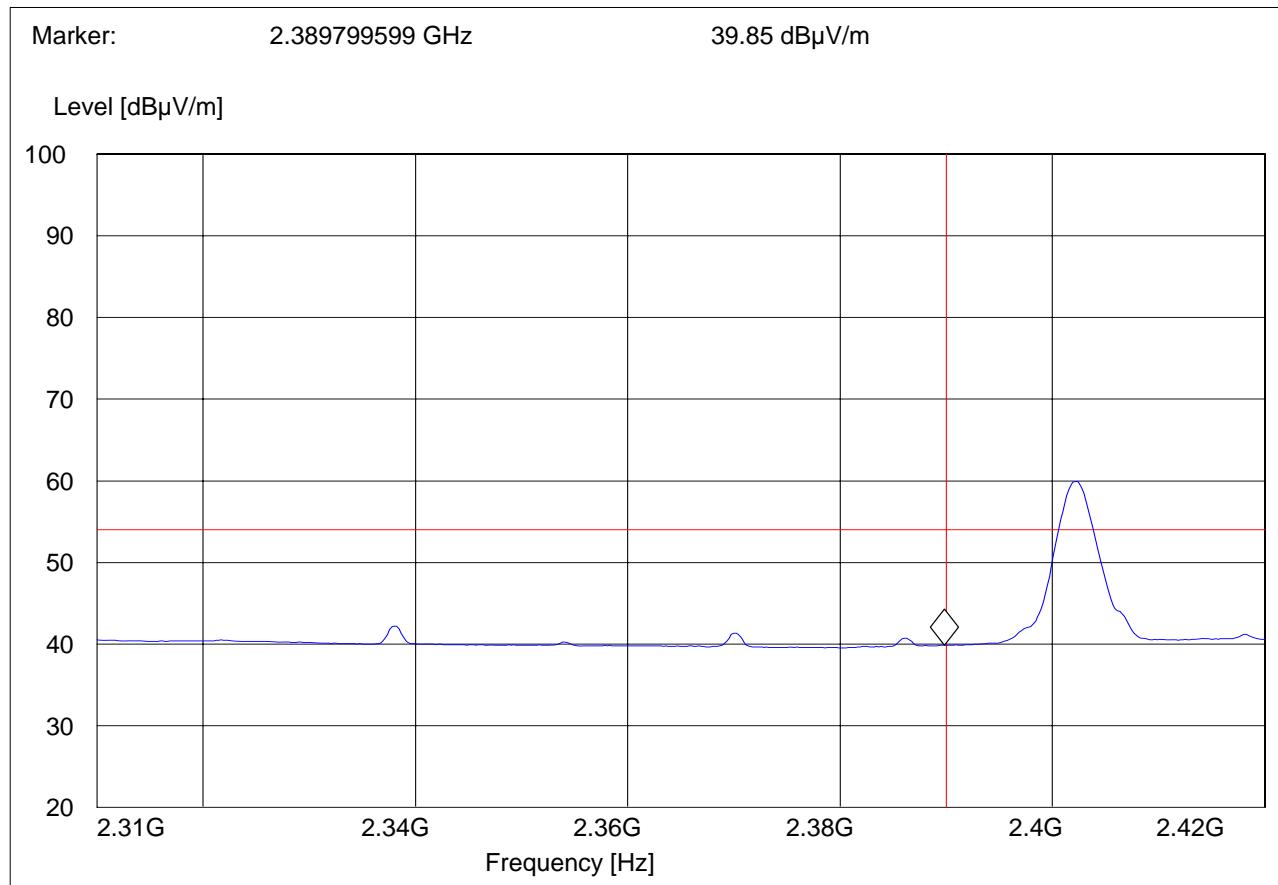


### Higher band edge peak -GFSK modulation

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

#### ***SWEET TABLE: "FCC15.247 HBE\_PK"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Time Coupled	1 MHz	#326horn_AF_vert
			MaxPeak		

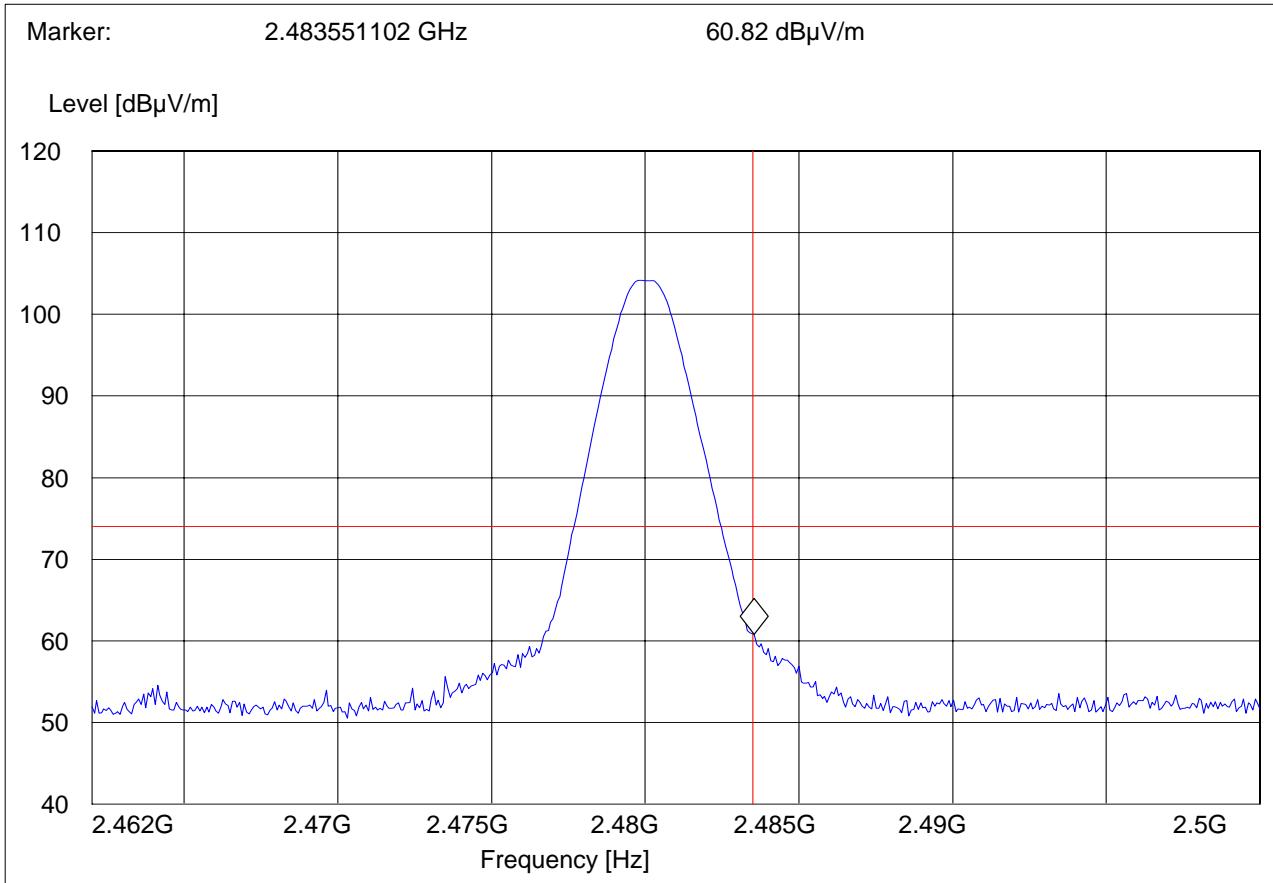


## Higher band edge average-GFSK modulation

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

### ***SWEEP TABLE: "FCC15.247 HBE\_AVG"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

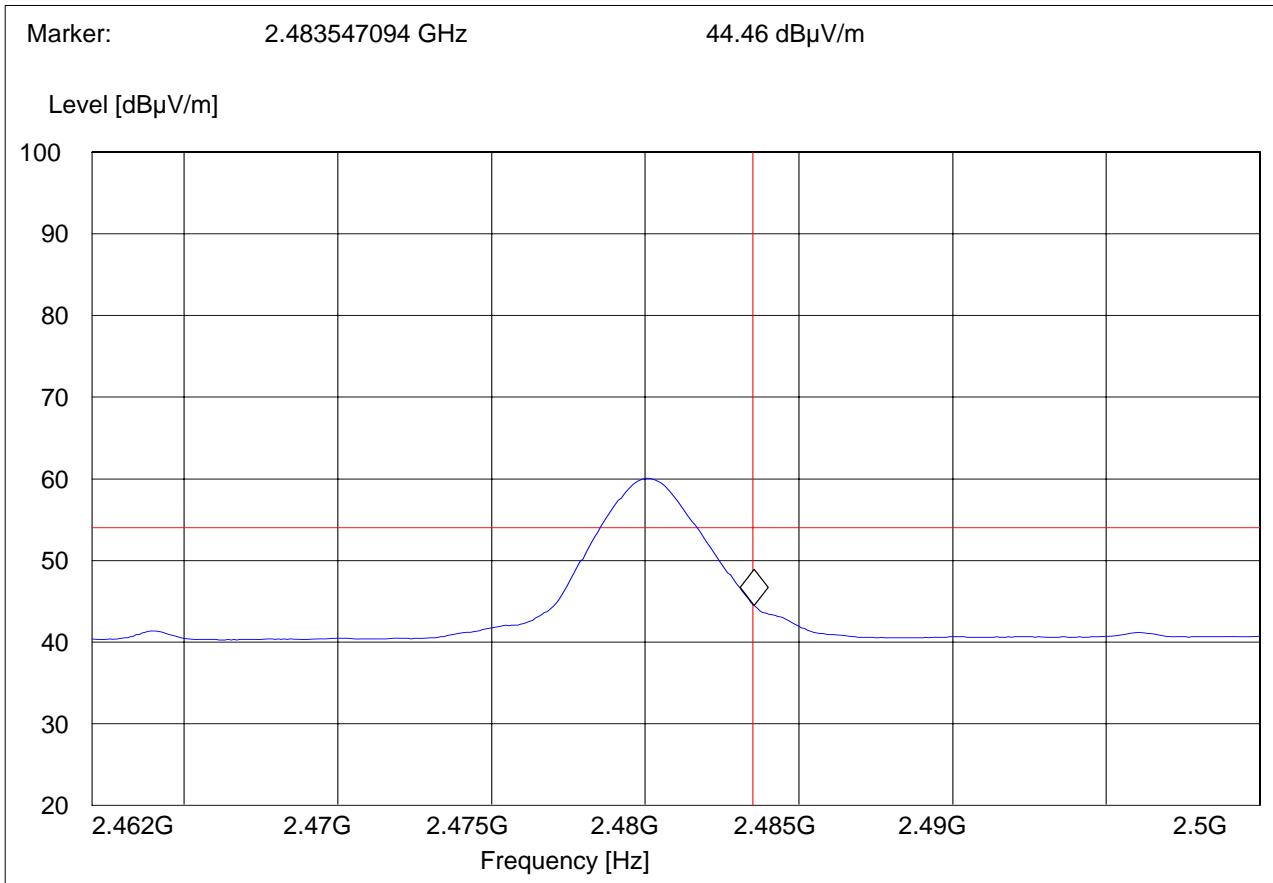

## **6.4 Transmitter Spurious Emissions- Radiated**

### **6.4.1 References:**

FCC CFR 2.1053

RSS-Gen Section 4.9; RSS 210-A8.5

### **6.4.2 Measurement requirements:**

#### **6.4.2.1 FCC 2.1053: Field strength of spurious radiation.**

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

#### **6.4.2.2 RSS-Gen 4.9: Transmitter unwanted spurious emissions**

The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

### **6.4.3 Limits:**

**§15.247/15.205**

**RSS 210-A8.5**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB.

\*PEAK LIMIT= 74dB $\mu$ V/m

\*AVG. LIMIT= 54dB $\mu$ V/m

**Table 1:**

Frequency of emission (MHz)	Field strength ( $\mu$ V/m)
30–88	100 (40dB $\mu$ V/m)
88–216	150 (43.5 dB $\mu$ V/m)
216–960	200 (46 dB $\mu$ V/m)
Above 960	500 (54 dB $\mu$ V/m)

**Table 2:**

Frequency of emission (MHz)	Field strength ( $\mu$ V/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30

#### **6.4.4 Test Result:**

**Test mode:** Modulation: GFSK- since highest conducted power

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plots reported here represent the worse case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

Measurement Uncertainty:  $\pm 3.0$ dB

##### **6.4.4.1 Measurement Result**

Pass.

No spurious emissions reported below 30MHz.

**6.4.5 Test data/ plots:**

**Transmitter Radiated Spurious Emission:<30MHz**

**Note: Worst case representation for all modes of operation in this frequency range-  
Limits adjusted for 3m measurement.**

*All measurements taken from 9kHz to 30MHz showed no emissions.*

## 30MHz – 1GHz


**Antenna: vertical**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

QuasiPeak @ 96.092184 MHz is 39.76 dB $\mu$ V/m

### ***SWEET TABLE: "FCC15.247\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

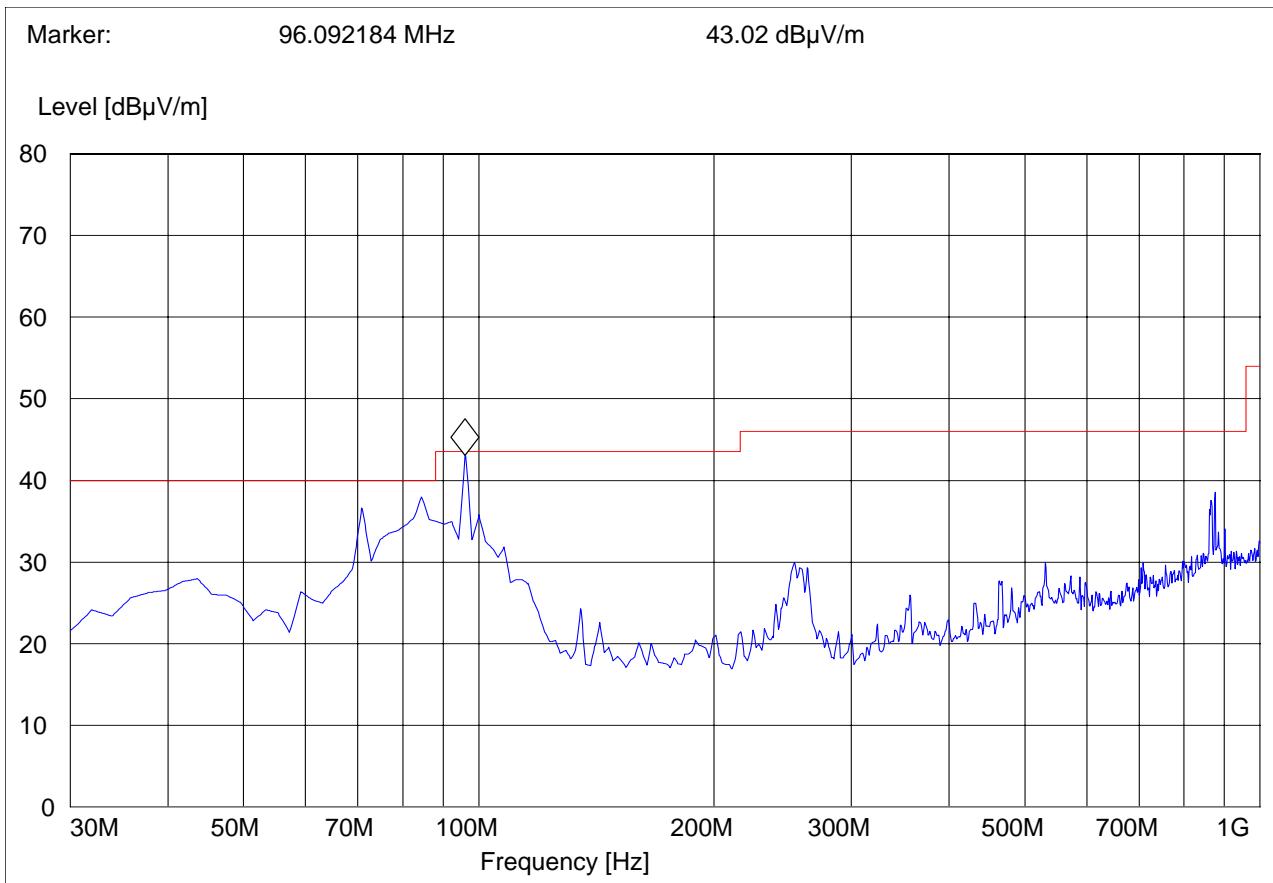


## 30MHz – 1GHz

### Antenna: Horizontal

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

#### ***SWEET TABLE: "FCC15.247\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

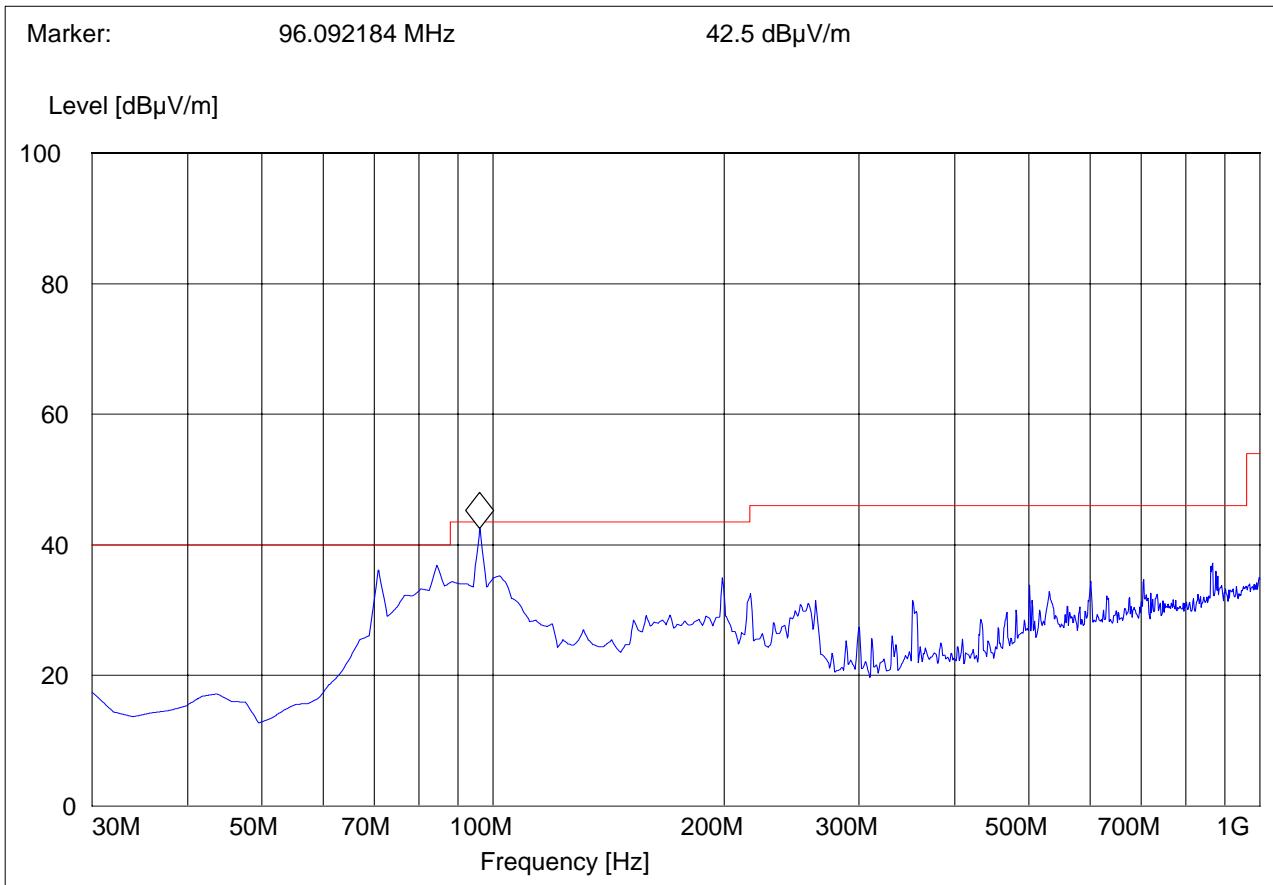


## 30MHz – 1GHz

### Antenna: Horizontal

EUT: 04GU10b / C01  
Customer:: Braemar  
Test Mode: BT CH.39; GFSK  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

#### ***SWEET TABLE: "FCC15.247\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

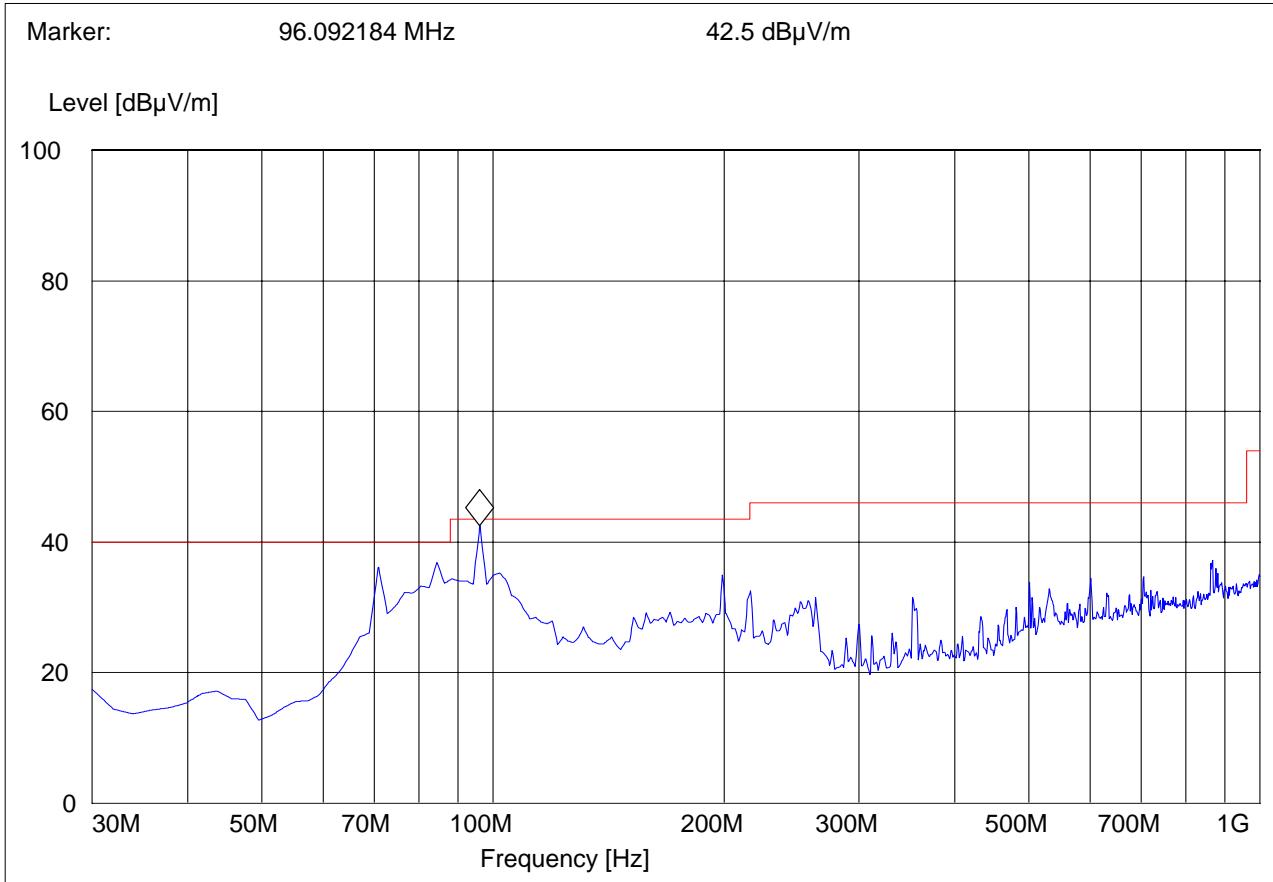


**30MHz – 1GHz**  
**Antenna: Vertical**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.39; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

QuasiPeak @ 96.092184 MHz is 39.76 dB $\mu$ V/m

***SWEET TABLE: "FCC15.247\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

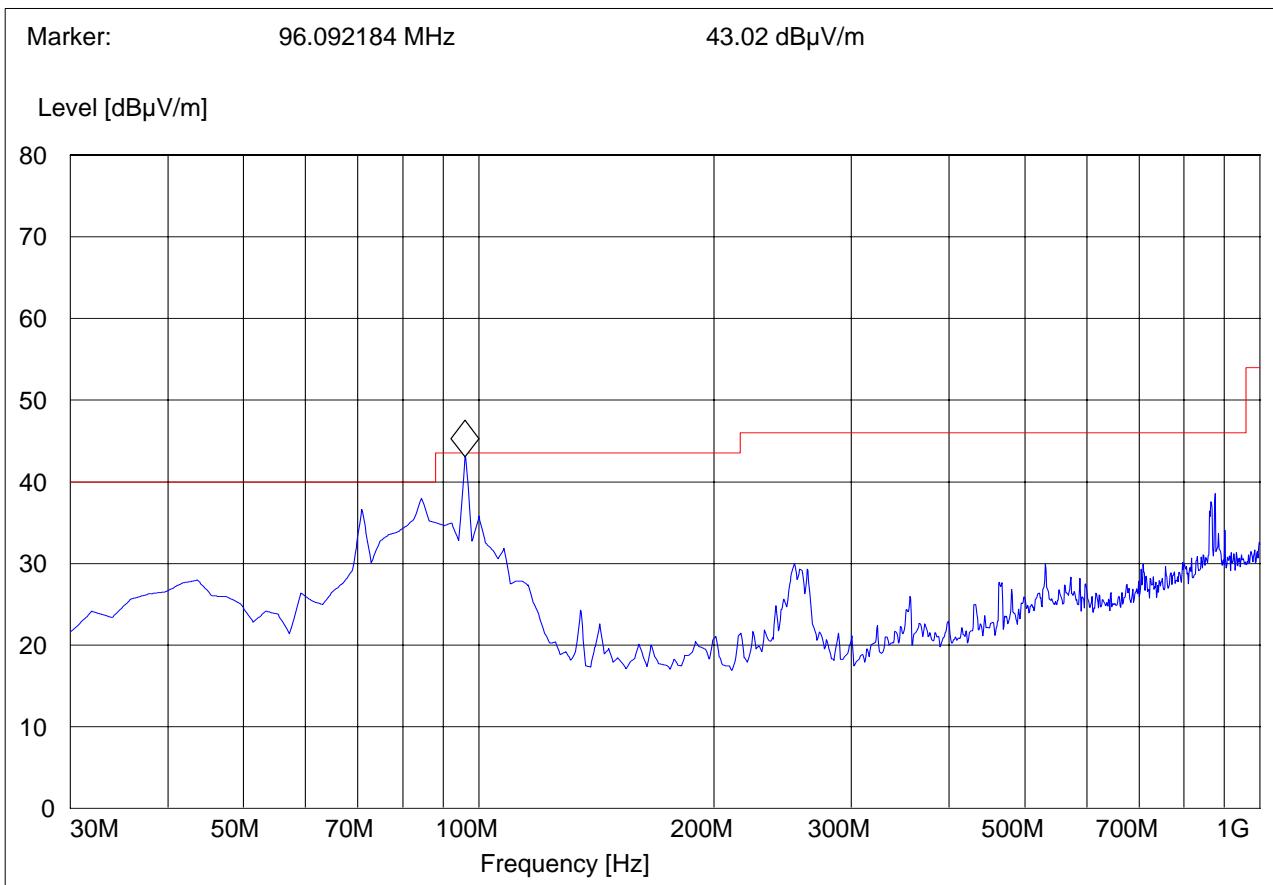


**30MHz – 1GHz**  
**Antenna: Vertical**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

QuasiPeak @ 96.092184 MHz is 39.76 dB $\mu$ V/m


***SWEET TABLE: "FCC15.247\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

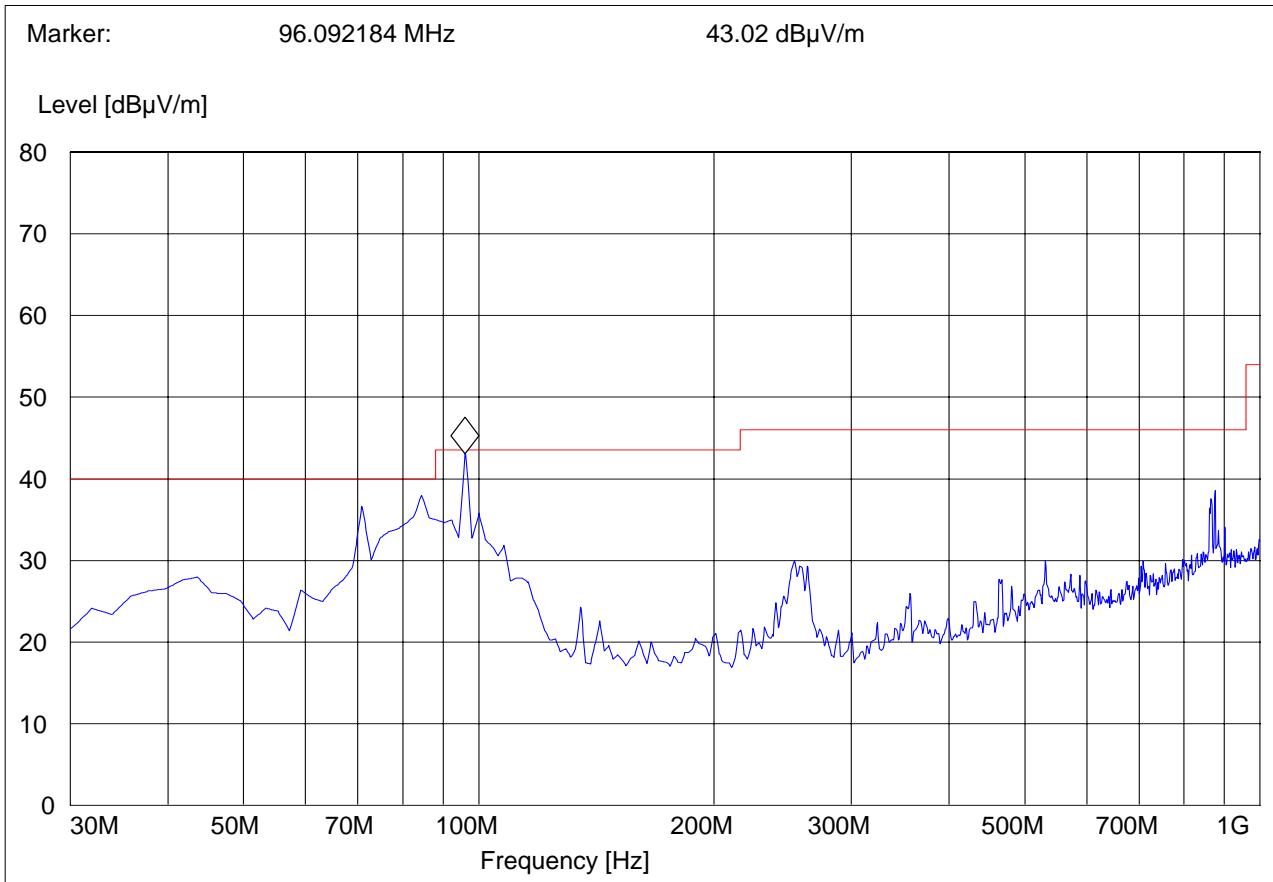

**30MHz – 1GHz**  
**Antenna: Horizontal**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

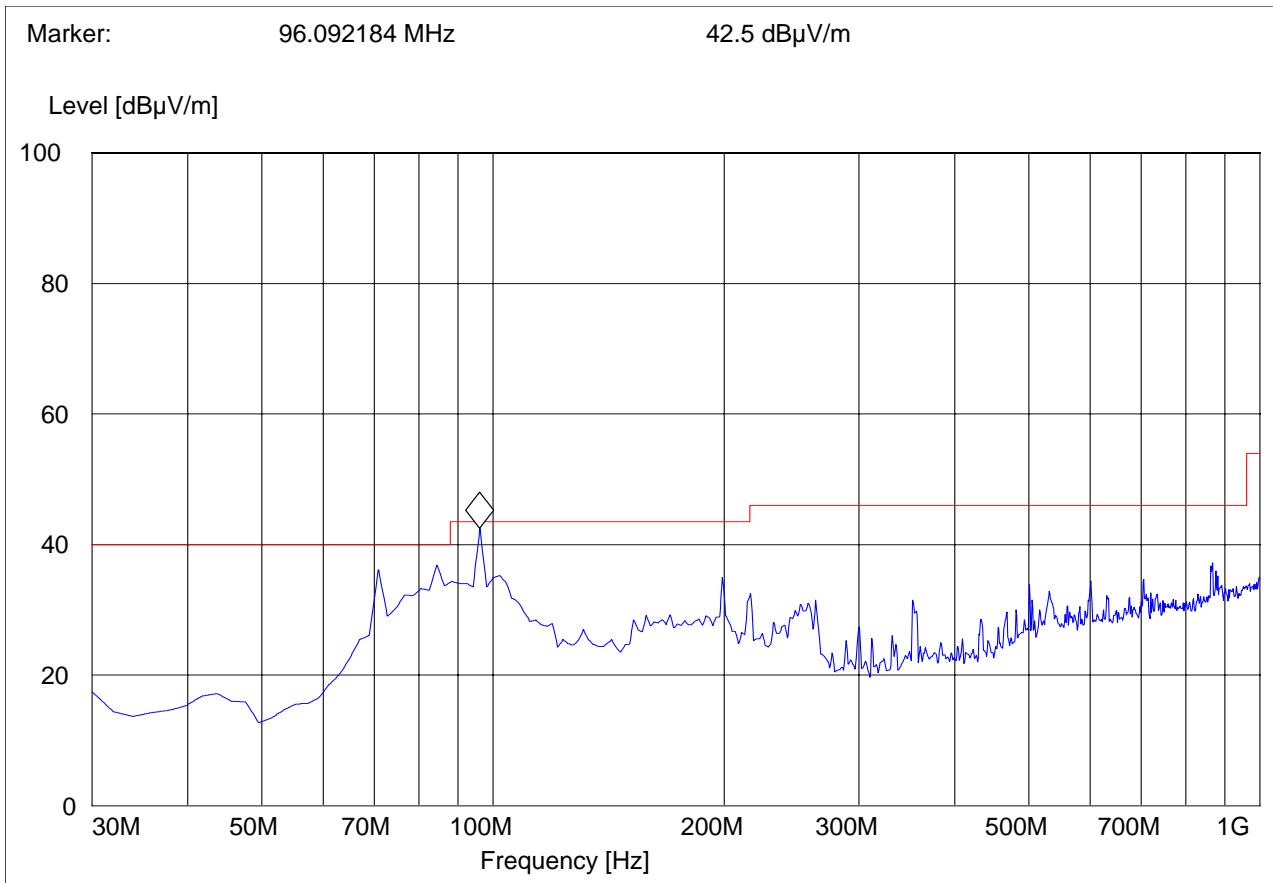

**SWEEP TABLE: "FCC15.247\_30M-1G\_Hor"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horiz

**1-3GHz (2402MHz)**


**Note: The peak above the limit line is the carrier freq.**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEET TABLE: "FCC15.247\_1-3G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

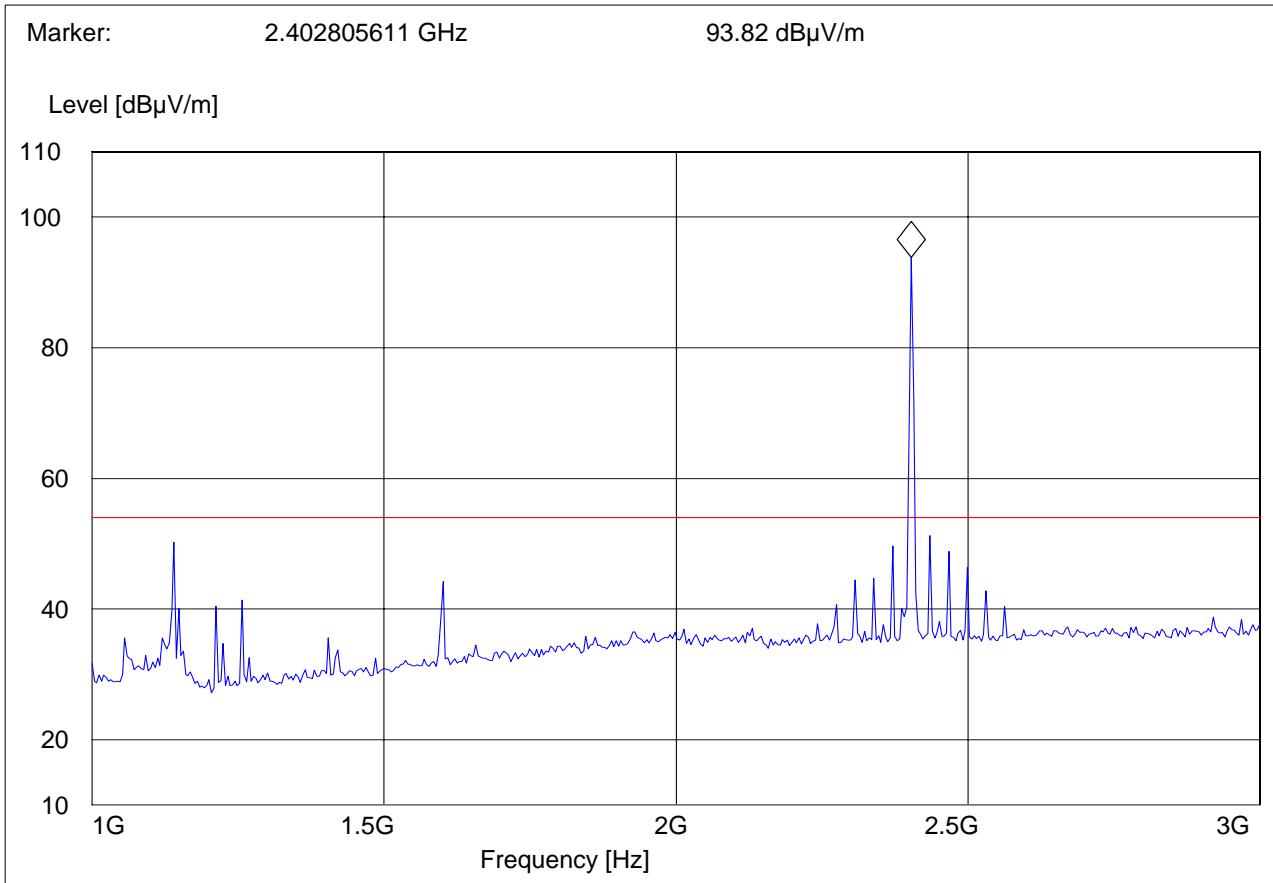

**1-3GHz (2441MHz)**


**Note: The peaks above the limit line is the carrier freq.**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.39; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEEP TABLE: "FCC15.247\_1-3G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

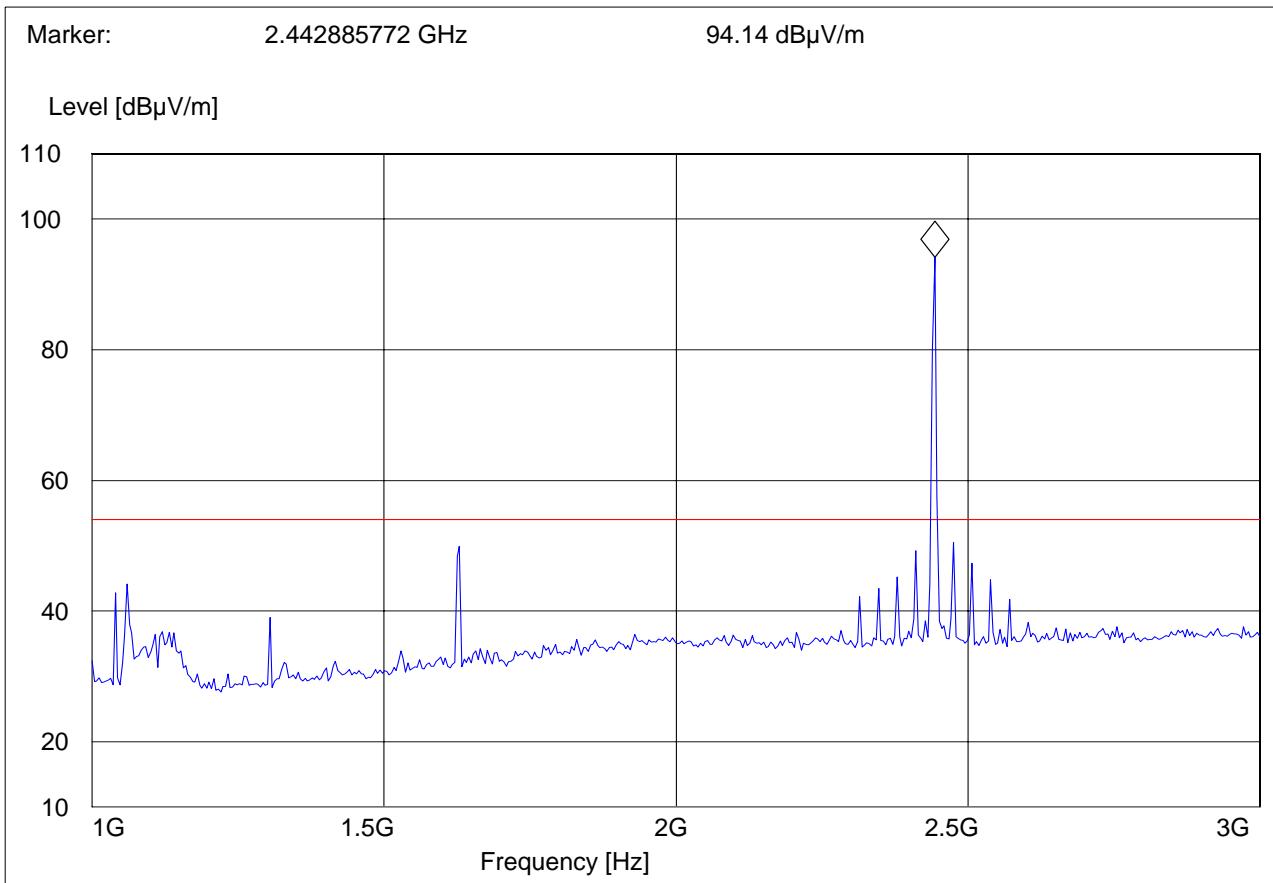

**1-3GHz (2480MHz)**


**Note: The peaks above the limit line is the carrier freq.**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEEP TABLE: "FCC15.247\_1-3G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

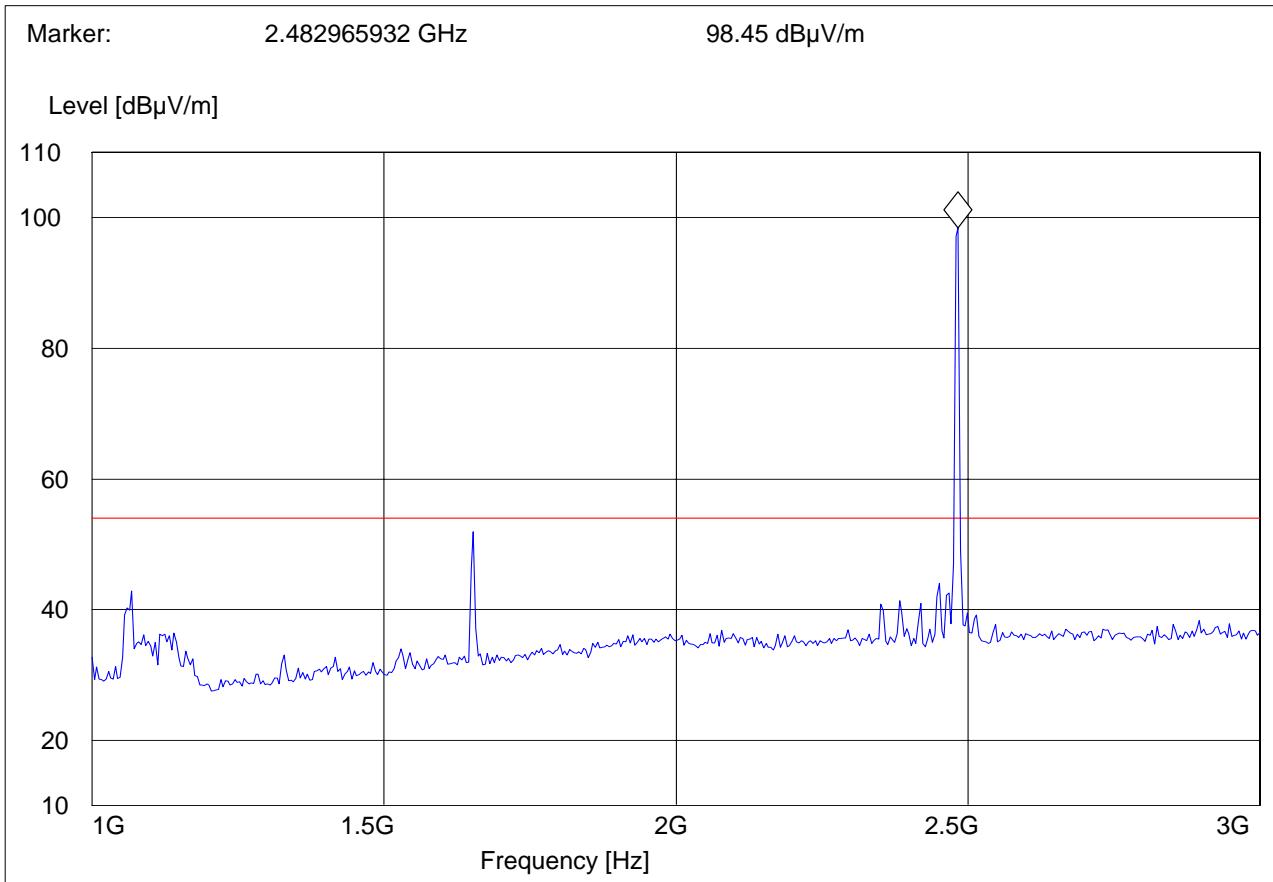


**3-18GHz (2402MHz)**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEET TABLE: "FCC15.247\_3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

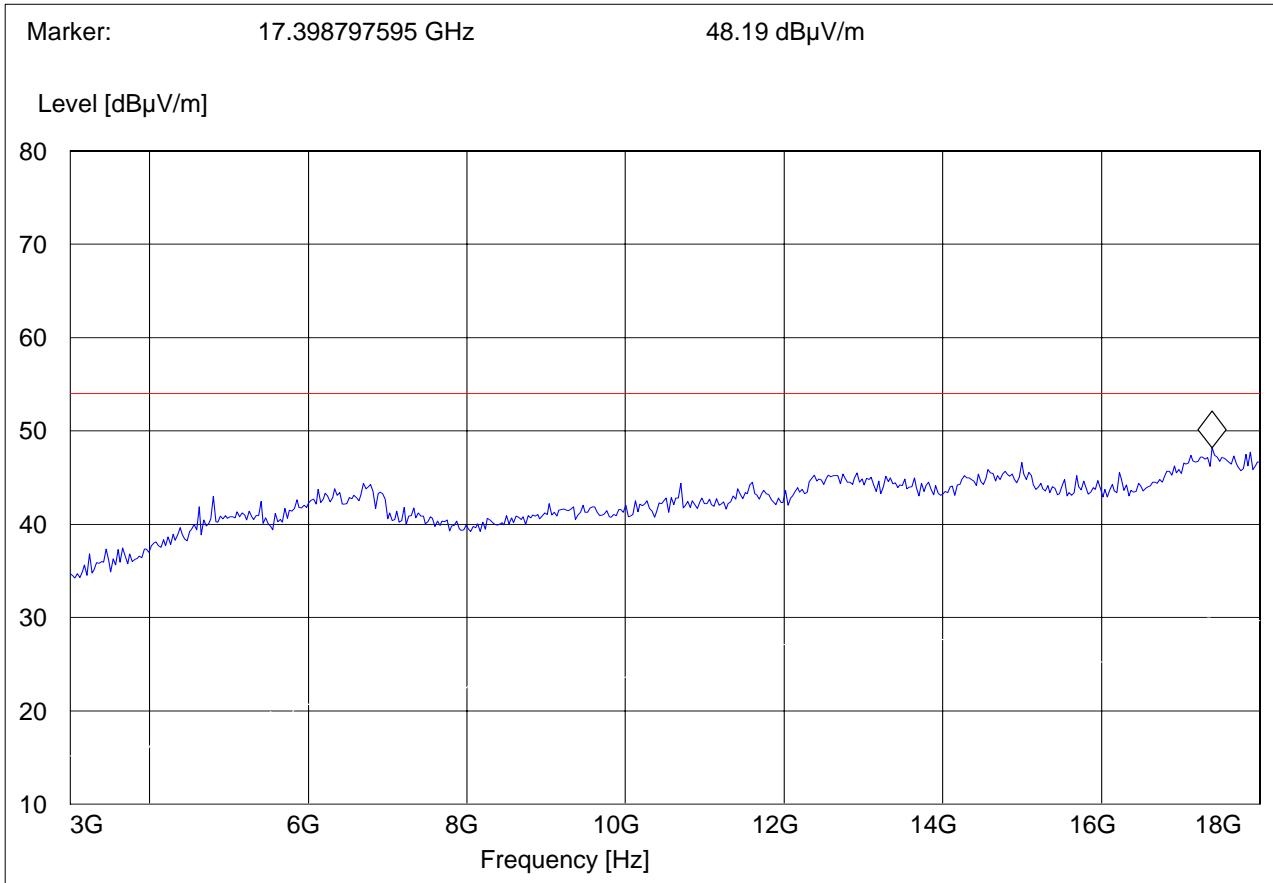


**3-18GHz (2441MHz)**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer:: Braemar  
Test Mode: BT CH.39; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEET TABLE: "FCC15.247\_3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

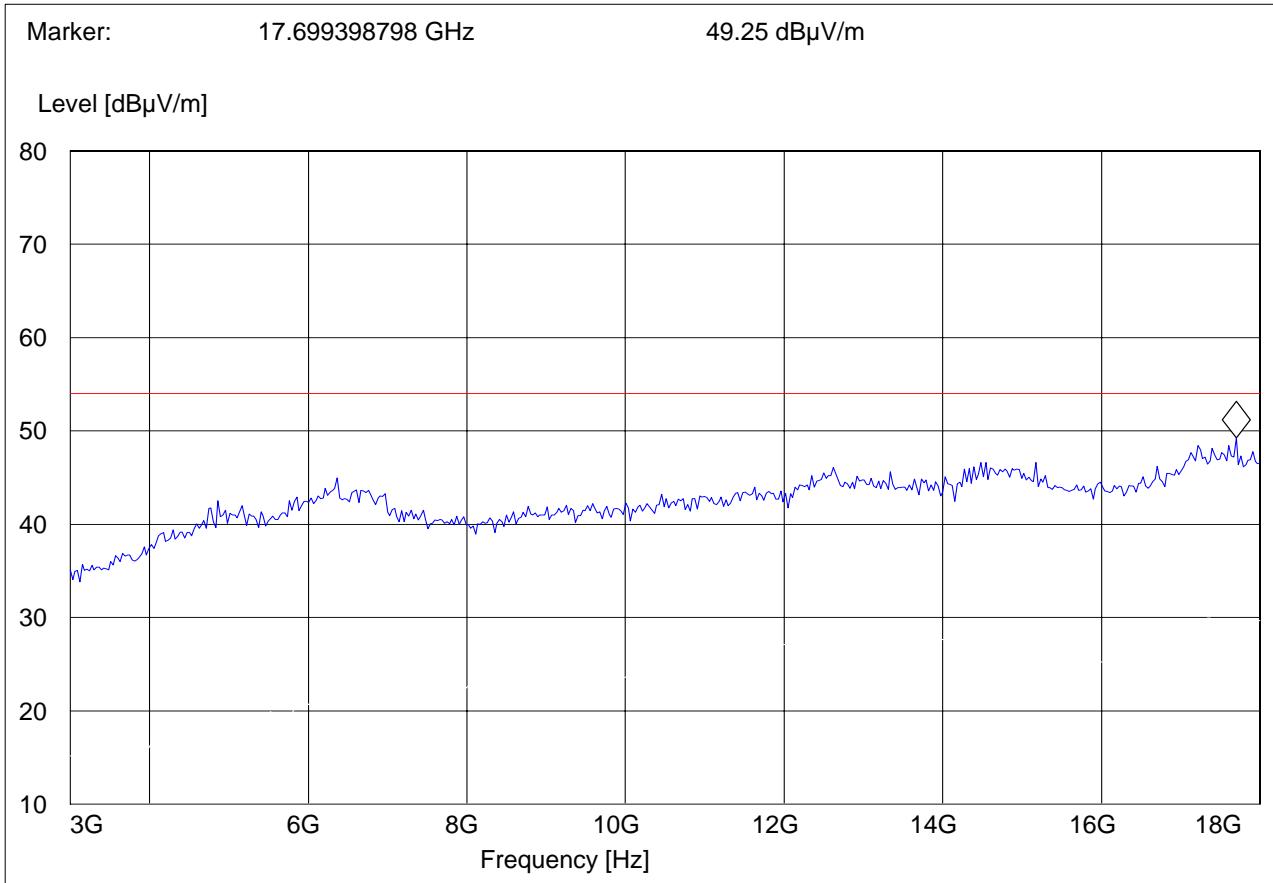


**3-18GHz (2480MHz)**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.78; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEET TABLE: "FCC15.247\_3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

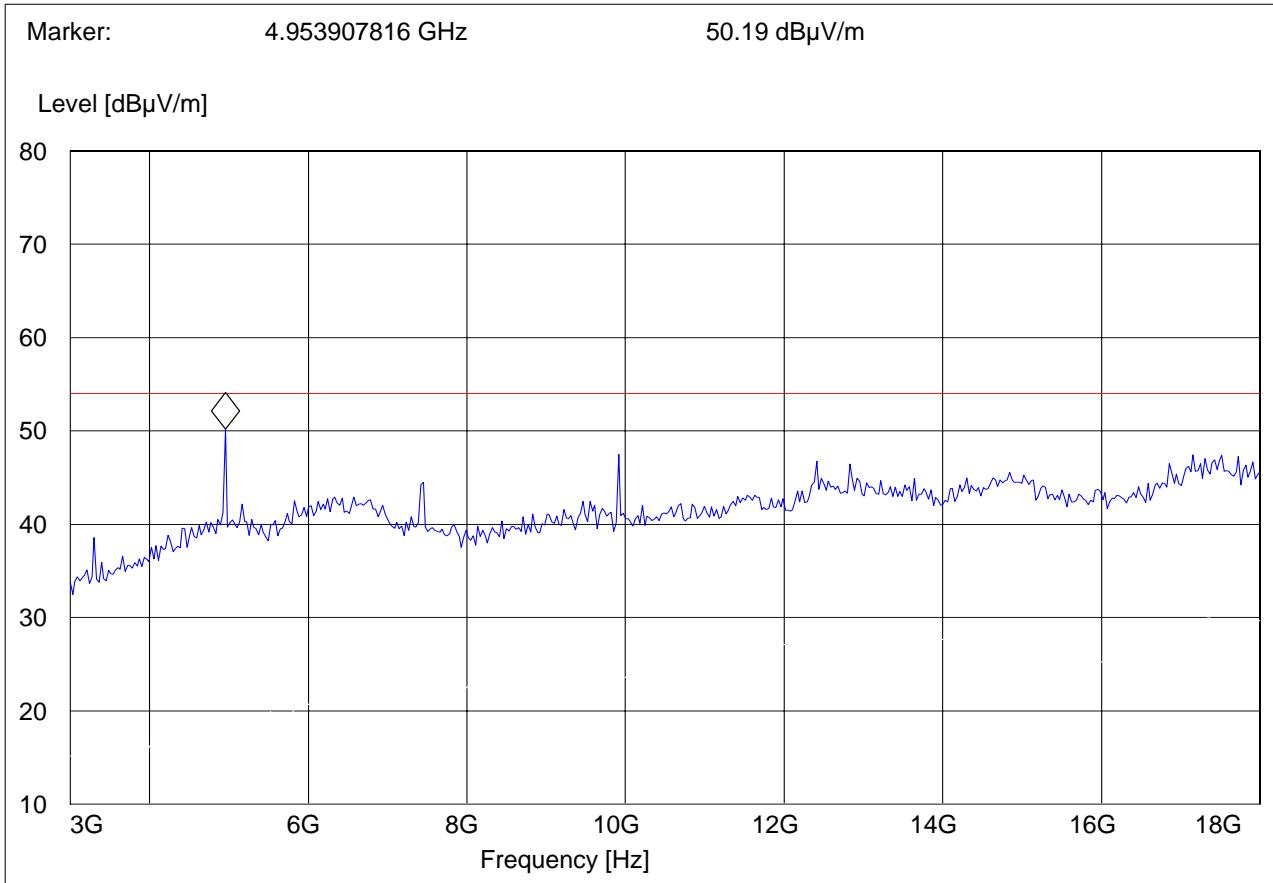

## 18-25GHz


**Note: This plot is valid for low, mid, high channels (worst-case plot)**

**Note: Peak Reading vs. Average limit**

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: BT CH.0; GFSK  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

### ***SWEET TABLE: "FCC15.247\_18-26.5G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G
			MaxPeak		

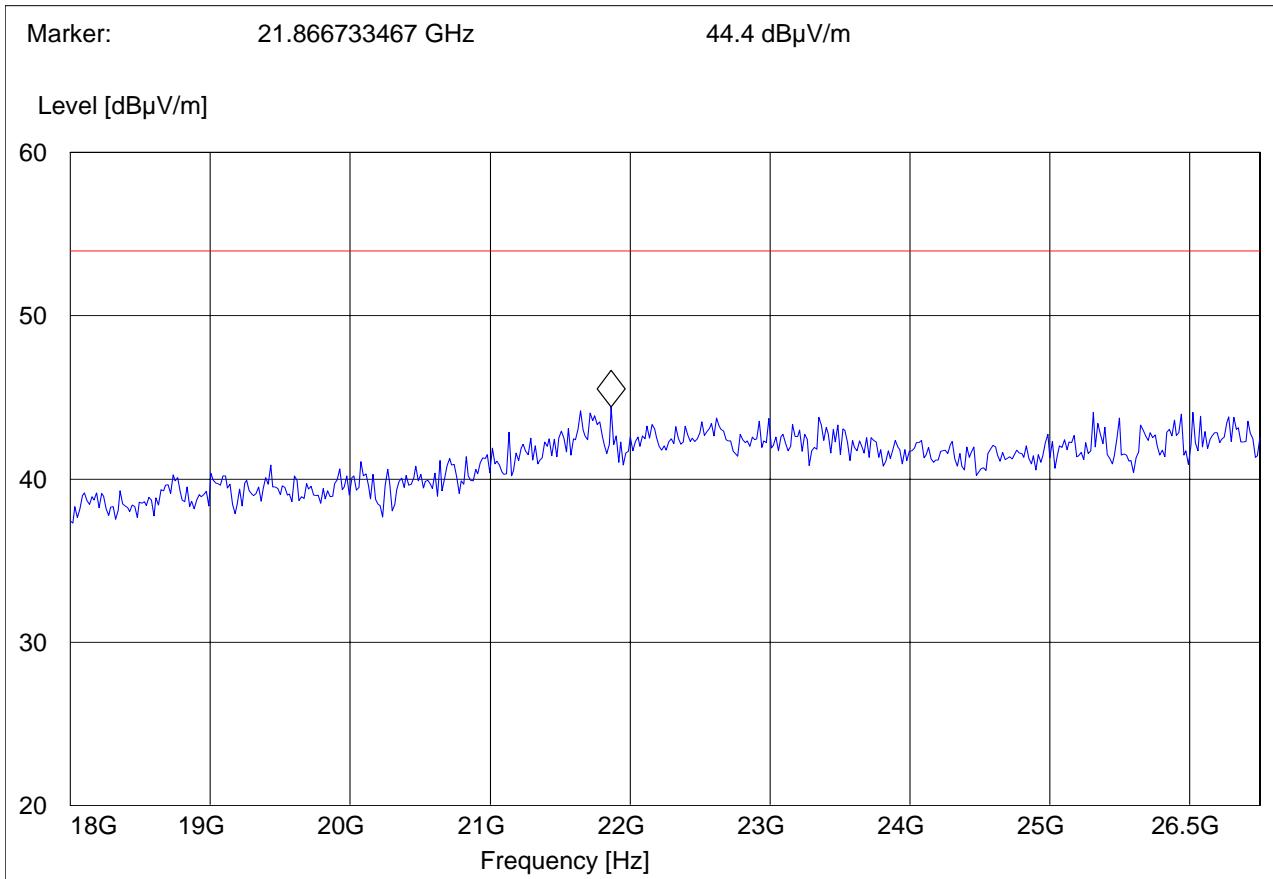

Receiver Spurious Emissions- Radiated

**6.4.6 Limits:**

6.4.6.1 FCC CFR §15.109

6.4.6.2 RSS-Gen

<b>Frequency of emission (MHz)</b>	<b>Field strength (<math>\mu</math>V/m)</b>	<b>Measurement Distance (m)</b>
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 (40dB $\mu$ V/m)	3
88–216	150 (43.5 dB $\mu$ V/m)	3
216–960	200 (46 dB $\mu$ V/m)	3
Above 960	500 (54 dB $\mu$ V/m)	3

**6.4.7 Test Conditions:**

Modulation: GFSK

Measurement Uncertainty:  $\pm 3.0$ dB

**6.4.8 Test Result:**

No significant emissions measurable. Plots reported here represent the worse case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

6.4.8.1 Measurement Result

Pass.

#### **6.4.9 Test data/ plots:**

**Receive Mode: <30MHz**

**Note: Limits adjusted for 3m measurement.**

#### **9kHz-490kHz**

EUT: 04GU10b / C01

Customer: Braemar

Test Mode: Rx

ANT Orientation: Loop

EUT Orientation: H


Test Engineer: Chris

Voltage: Internal Battery

Comments:

#### ***SWEET TABLE: "FCC15.209<490k\_Loop"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
9.0 kHz	490.0 kHz	MaxPeak	Coupled	200 Hz	Loop 6512E

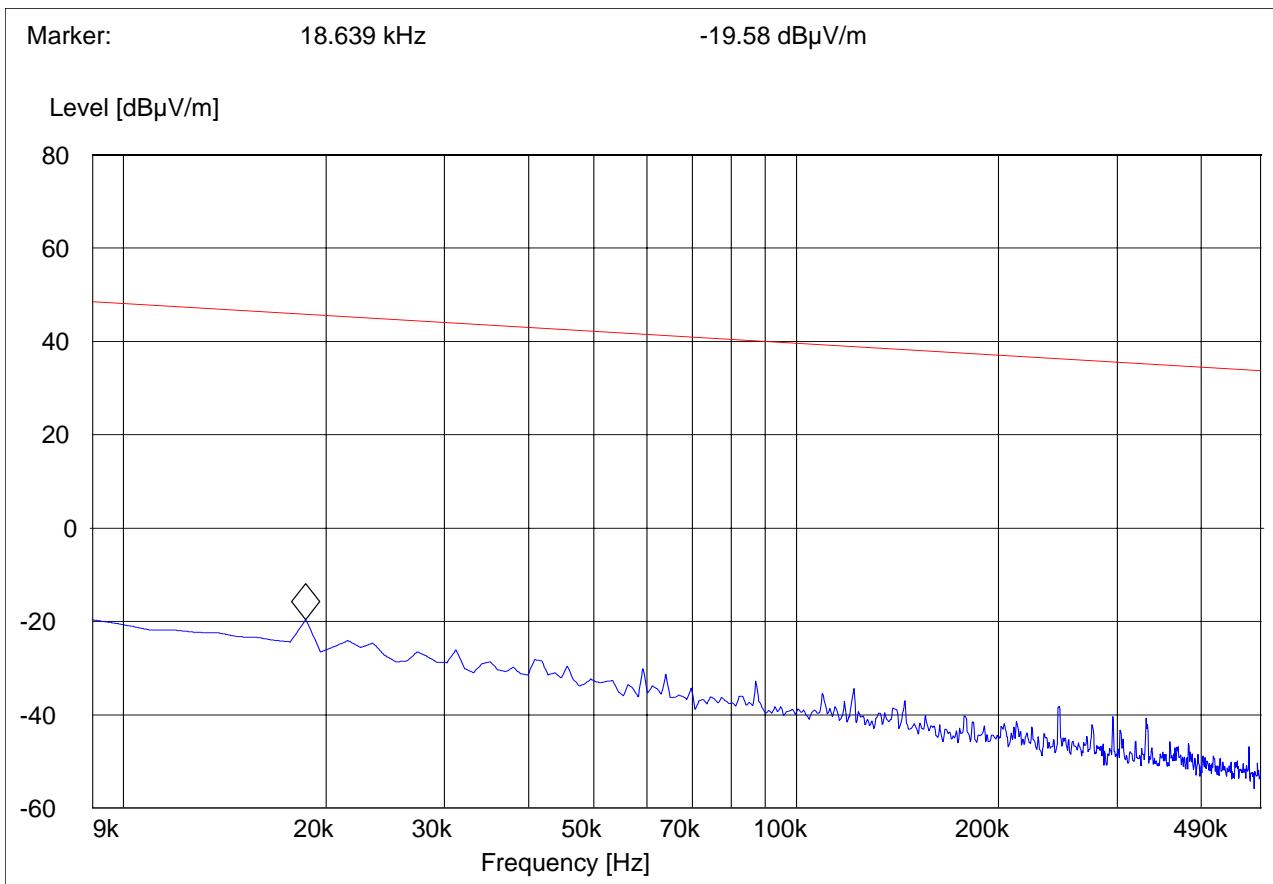


## 490kHz-30MHz

EUT: 04GU10b / C01  
Customer: Braemar  
Test Mode: Rx  
ANT Orientation: Loop  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

### ***SWEEP TABLE: "FCC15.209>490k\_Loop"***

Start Frequency	Stop Frequency	Detector Meas.	IF Time	Transducer Bandw.
490.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz Loop 6512E

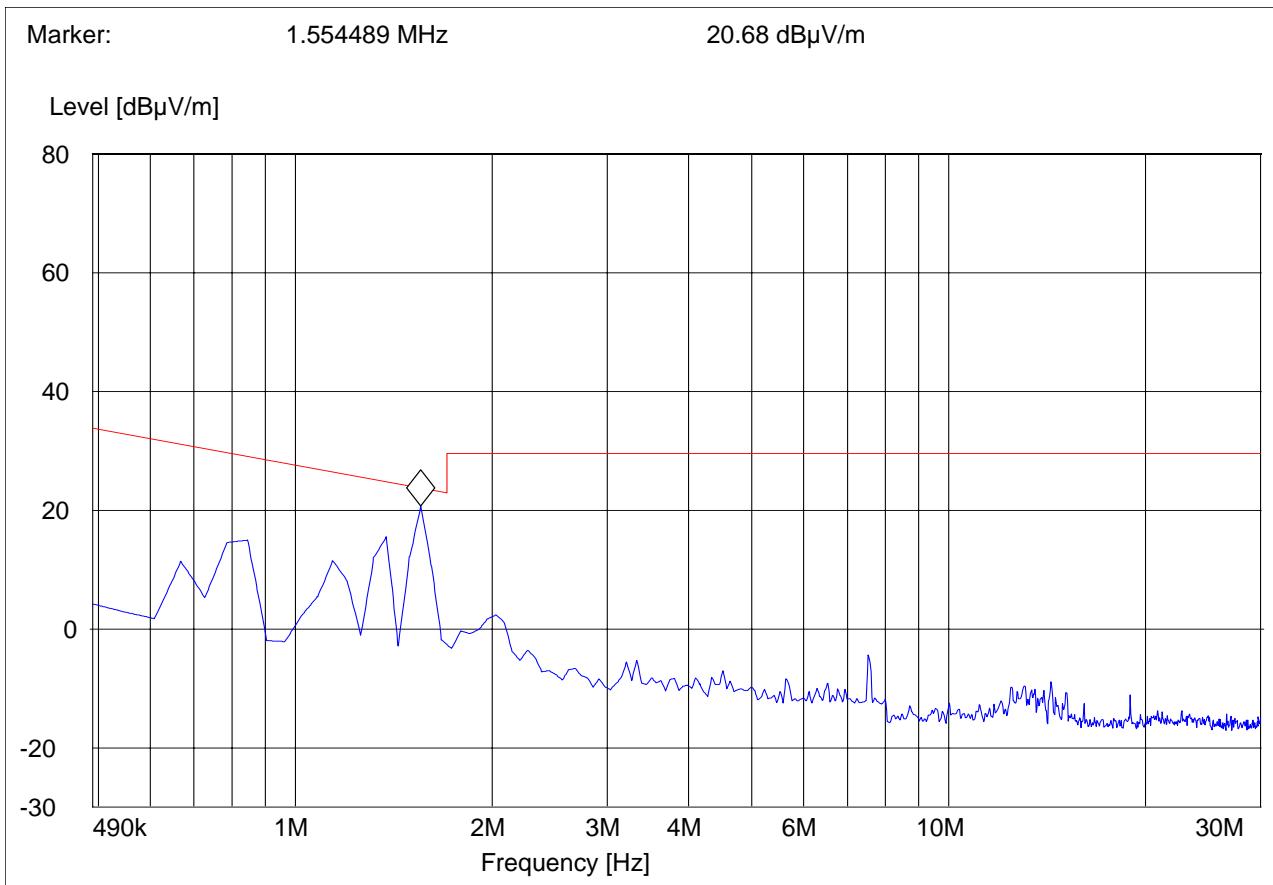

**Receive Mode: 30MHz-1GHz****Antenna: Horizontal**

EUT: 04GU10b / C01

Customer: Braemar

Test Mode: BT Rx

ANT Orientation: H


EUT Orientation: V

Test Engineer: Chris

Voltage: Internal Battery

***SWEEP TABLE: "FCC15.247\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

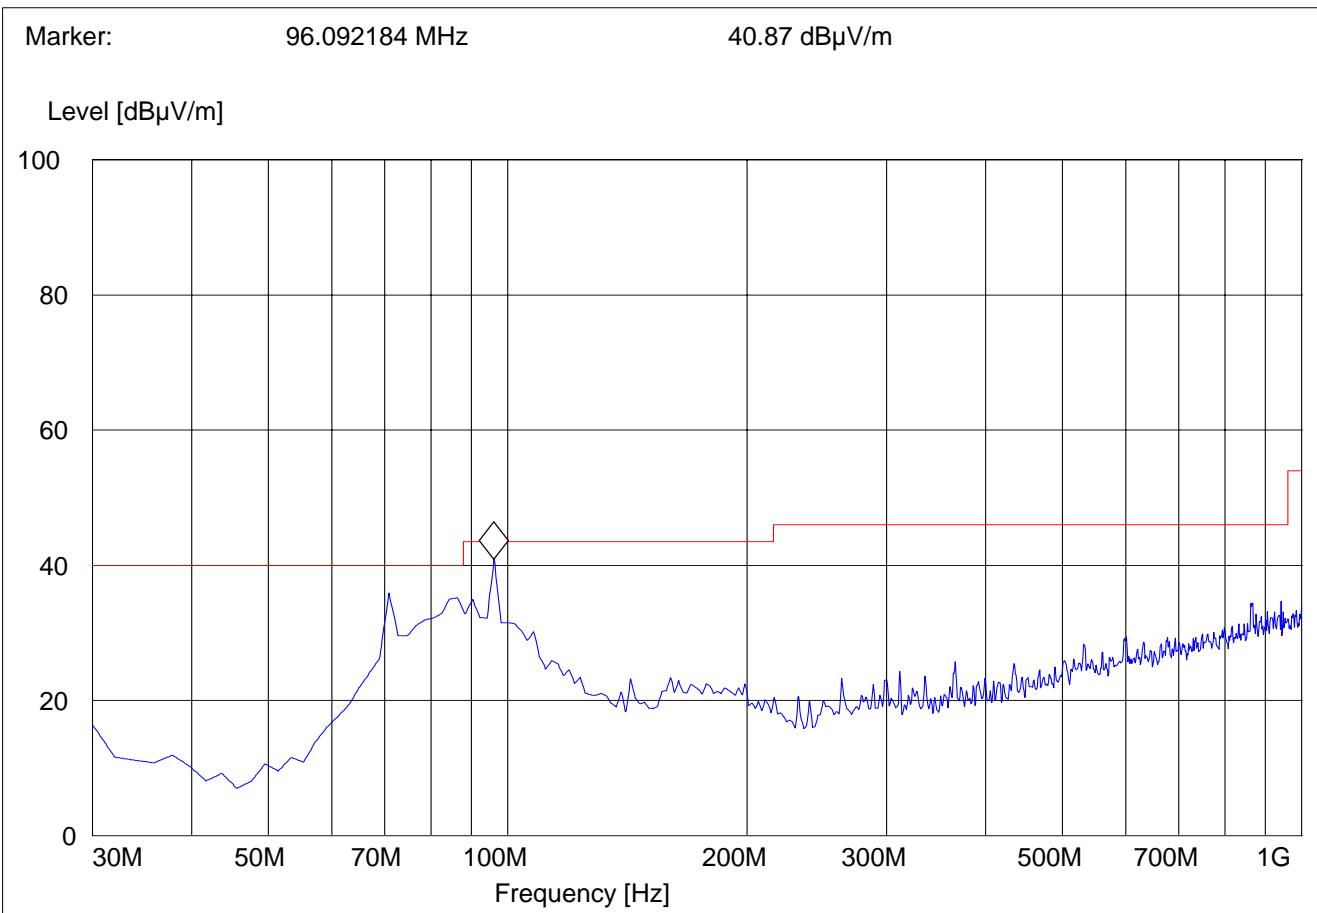

**Receive Mode: 30MHz-1GHz****Antenna: Vertical**

EUT: 04GU10b / C01

Customer: Braemar

Test Mode: BT Rx

ANT Orientation: V

EUT Orientation: V


Test Engineer: Chris

Voltage: Internal Battery

Comments:

QuasiPeak at 96.092184 MHz is 38.44 dB $\mu$ V/m***SWEEP TABLE: "FCC15.247\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

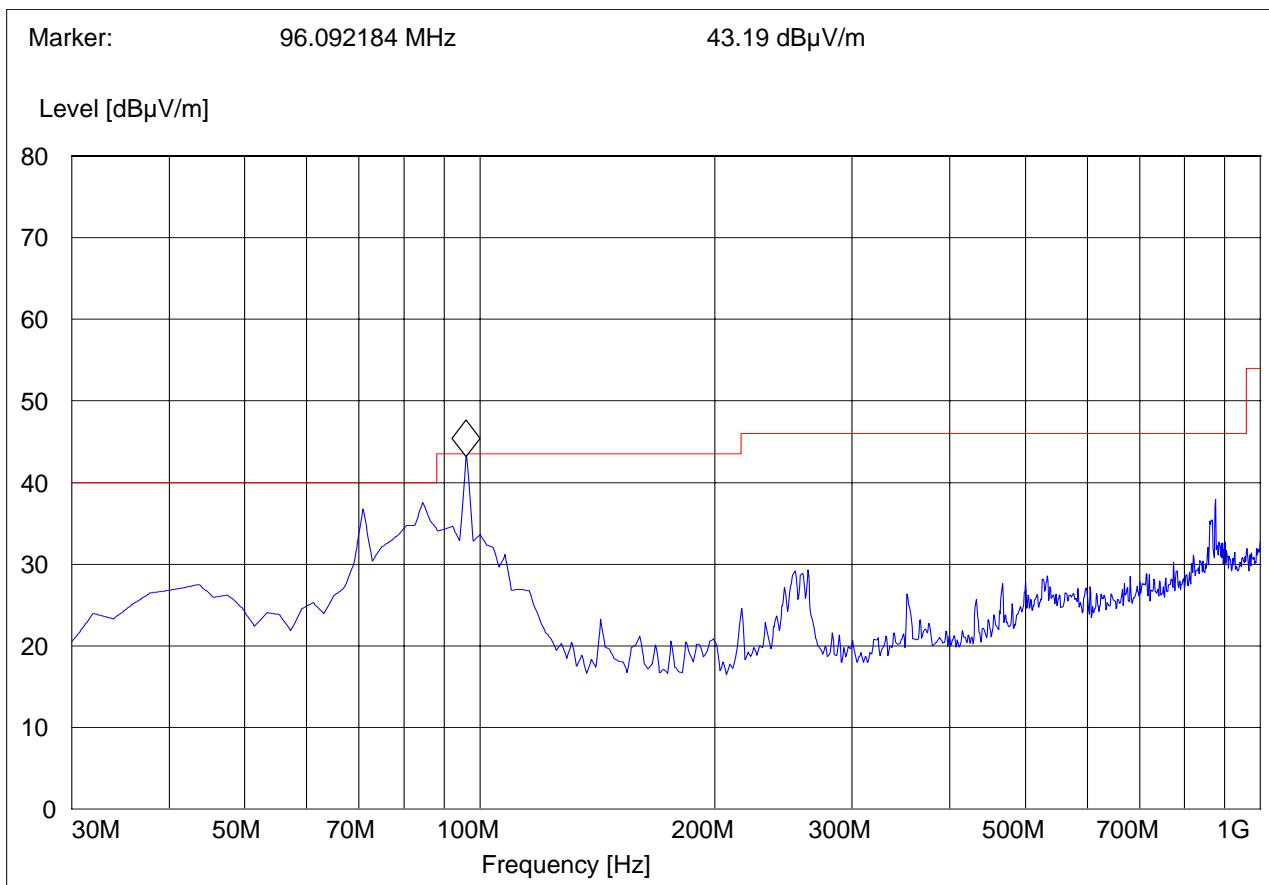

**Receive Mode: 1GHz-18GHz**

EUT / Description: 04GU10b / C01

Customer: Braemar

Operation Mode: BT RX

ANT Orientation: : H

EUT Orientation: V


Test Engineer: Chris

Voltage: Internal Battery

Comments::

***SWEEP TABLE: "FCC15.247\_1-18G"***

Start Frequency	Stop Frequency	Detector Meas.	IF Time	Transducer Bandw.
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz #326horn_AF_horz

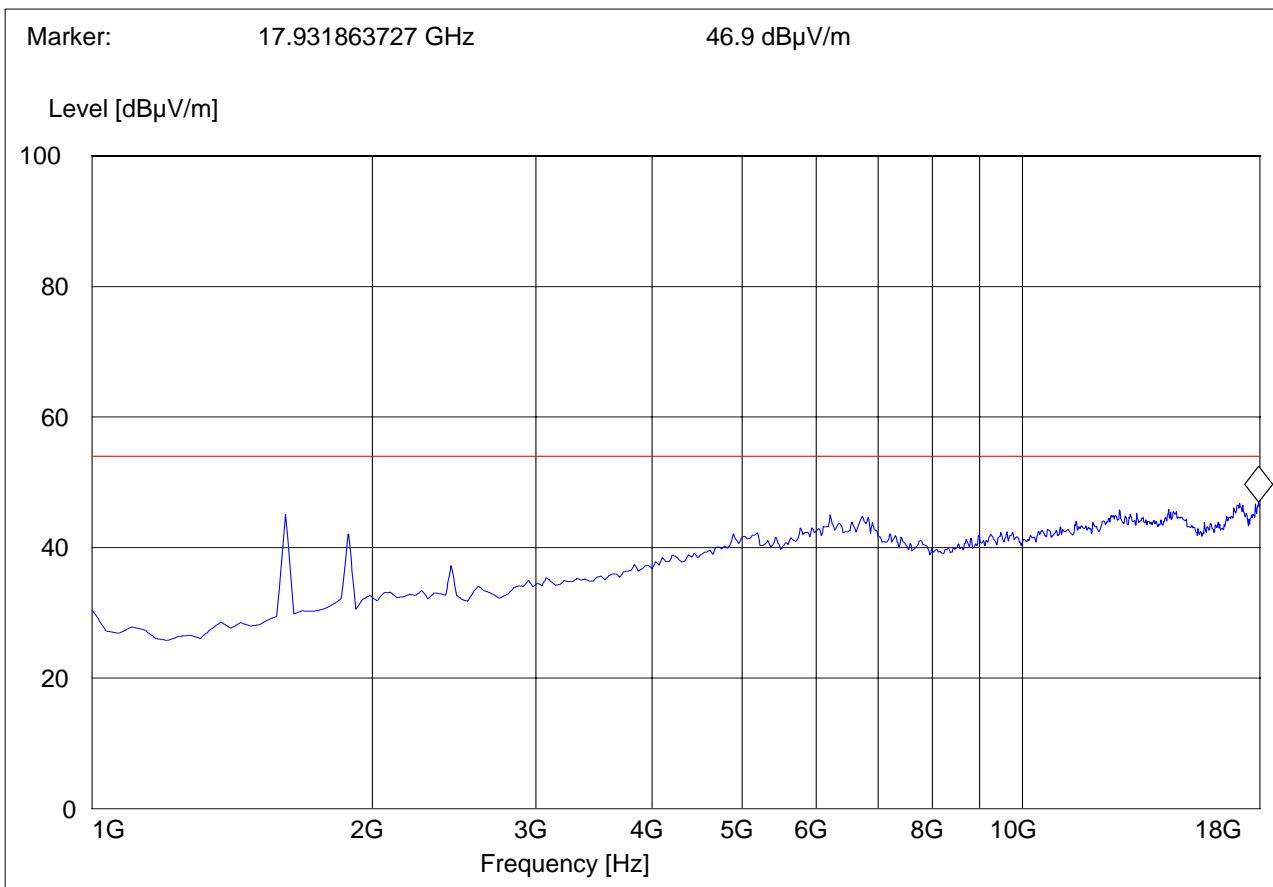

## **6.5 AC Power Line Conducted Emissions**

### **6.5.1 References:**

FCC: CFR Part 15.207

IC: RSS-Gen Section 7.2.2

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

### **6.5.2 Limits:**

#### **6.5.2.1 §15.207 Conducted limits- Intentional Radiators:**

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

#### **6.5.2.2 RSS-Gen 7.2.2**

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown below. The tighter limit applies at the frequency range boundaries.

**Table 1:**

<b>Frequency of emission (MHz)</b>	<b>Conducted limit (dB<math>\mu</math>V)</b>	
	<b>Quasi-peak</b>	<b>Average</b>
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.

**Analyzer Settings: CISPR Bandwidth- 9KHz.**

### **6.5.3 Test Conditions:**

Modulation: GFSK

Measurement Uncertainty:  $\pm 3.0$ dB

## **6.5.4 Results**

Measurements were not taken because the EUT uses two AA lithium battery packs as the only source of power.


### **6.5.4.1 Measurement Result**

Pass.

## **7 Test Equipment and Ancillaries used for tests**

<b>Instrument/Ancillary</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Serial No.</b>	<b>Cal Date</b>	<b>Cal Interval</b>
Bluetooth Tester	CBT	Rohde & Schwarz	100212	May 2009	2 Years
EMI Receiver/Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
Spectrum Analyzer	FSU	Rohde & Schwarz	200302	Jul 2010	1 year
Loop Antenna	6512	EMCO	00049838	April 2009	2 years
Biconilog Antenna	3141	EMCO	0005-1186	June 2009	2 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Jan 2009	3 years
Horn Antenna (18-40GHz)	3116	ETS	00070497	Jan 2009	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
Power Smart Sensor	R&S	NRP-Z81	100161	June 2010	1 Year
Multimeter	179	Fluke	N/A	Feb 2010	1 Year
Temp Hum Logger	TM320	Dickson	03280063	Feb 2010	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Feb 2010	1 Year

## **8 Test Setup Info:**

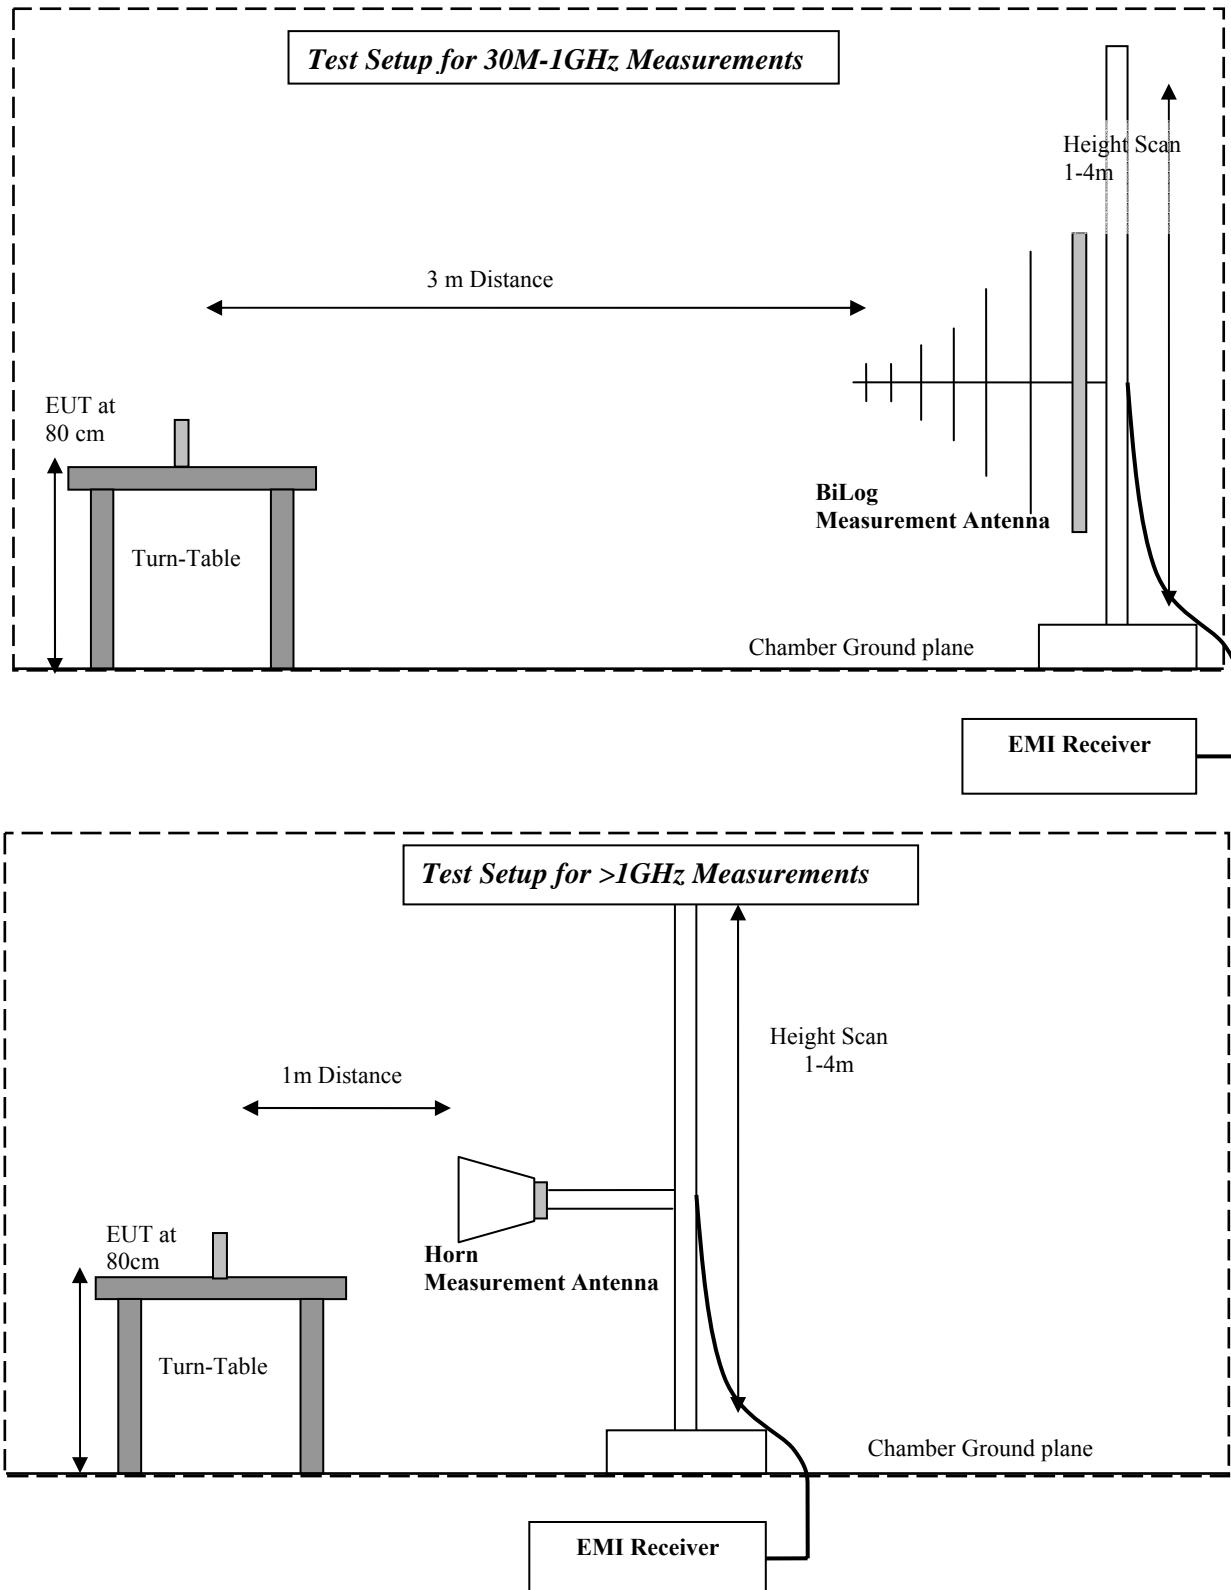

## **9 Revision History**

<b>Date</b>	<b>Report Name</b>	<b>Changes to report</b>	<b>Report prepared by</b>
<b>2010-12-16</b>	<b>EMC_BRAEM_008_10001_15.247BT</b>	<b>First Version</b>	<b>Christopher Torio</b>