



FCC RADIO TEST REPORT

FCC ID: HHOJWA-2018R

Product : Portable 3G Wireless Router

Trade Name :  **JCG**

Model Name : JWA-2018R

Serial Model : N/A

Report No. : NTEK- 2013NT1014403F

Prepared for

Shenzhen Yichen Technology Development Co.,Ltd.
5F,NO.1, Honghualing 2nd industrial Zone, Xili Town,Nanshan
District,Shenzhen, China.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website:www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Yichen Technoloy Development Co.,Ltd.

Address : 5F,NO.1, Honghualing 2nd industrial Zone,
Xili Town,Nanshan District,Shenzhen, China.

Manufacture's Name..... : Shenzhen Yichen Technoloy Development Co.,Ltd.

Address : 5F,NO.1, Honghualing 2nd industrial Zone,
Xili Town,Nanshan District,Shenzhen, China.

Product description

Product name : Portable 3G Wireless Router

Model and/or type reference : JWA-2018R

Serial Model : N/A

Standards : FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.


Date of Test :

Date (s) of performance of tests : 14 Oct. 2013 ~ 13 Nov. 2013

Date of Issue : 13 Nov. 2013


Test Result..... : **Pass**

Testing Engineer :




(Polo Cha)

Technical Manager :



(Brown Lu)

Authorized Signatory :



(Bovey Yang)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	26
4 . POWER SPECTRAL DENSITY TEST	40
4.1 APPLIED PROCEDURES / LIMIT	40
4.1.1 TEST PROCEDURE	40
4.1.2 DEVIATION FROM STANDARD	40
4.1.3 TEST SETUP	40
4.1.4 EUT OPERATION CONDITIONS	40
4.1.5 TEST RESULTS	41
5 . BANDWIDTH TEST	49
5.1 APPLIED PROCEDURES / LIMIT	49
5.1.1 TEST PROCEDURE	49

Table of Contents	Page
5.1.2 EUT OPERATION CONDITIONS	49
5.1.3 TEST RESULTS	50
6 . PEAK OUTPUT POWER TEST	58
6.1 APPLIED PROCEDURES / LIMIT	58
6.1.1 TEST PROCEDURE	58
6.1.2 DEVIATION FROM STANDARD	58
6.1.3 TEST SETUP	58
6.1.4 EUT OPERATION CONDITIONS	58
6.1.5 TEST RESULTS	59
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	60
7.1 DEVIATION FROM STANDARD	60
7.2 TEST SETUP	60
7.3 EUT OPERATION CONDITIONS	60
7.4 TEST RESULTS	61
8 . ANTENNA REQUIREMENT	67
8.1 STANDARD REQUIREMENT	67
8.2 EUT ANTENNA	67
9 . EUT TEST PHOTO	68
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Portable 3G Wireless Router	
Trade Name		
Model Name	JWA-2018R	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Portable 3G Wireless Router.	
	Operation Frequency:	802.11b/g/n(20MHz):2412~2462 MHz 802.11n(40MHz):2422~2452 MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 13.85 dBm (Max.) 802.11g: 12.86 dBm (Max.) 802.11n(20M) : 10.41 dBm (Max.) 802.11n (40M):9.91 dBm (Max.)
	Antenna Gain (dBi)	1.0dbi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 3.7V	
Adapter	N/A	
Battery	DC 3.7V, 5200mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	ceramic Antenna	N/A	1.0	Wifi Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	802.11n CH3/ CH6/ CH9
Mode 5	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	802.11n CH3/ CH6/ CH9

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported


2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

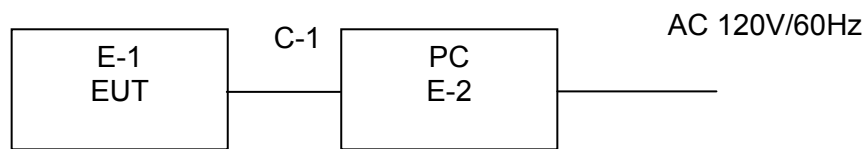


Radiated Spurious Emission Test

MODE1



MODE2



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Portable 3G Wireless Router	 JCG	JWA-2018R	N/A	EUT
E-2	Notebook	DELL	PP10L	N/A	
E-3	3G Dongle	ZTE	K5006-Z	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	60cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2012.12.22	2013.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Item	Kind of Equipment	Manufacturer	Type No.	FCC ID
1	3G dongle	ZTE	K5006-Z	Q78-K5006-Z

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2013.06.06	2014.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2013.06.07	2014.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.07	2014.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2014.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2013.06.08	2014.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

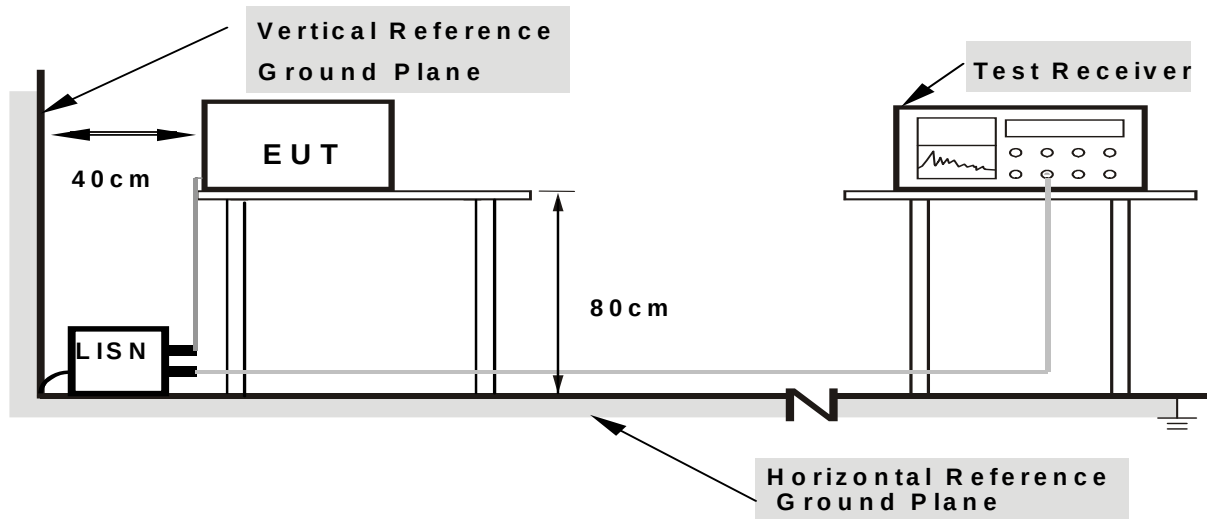

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from notebook	Test Mode :	Mode 5

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1660	45.67	11.46	57.13	65.15	-8.02	QP
0.1660	28.84	11.46	40.30	55.15	-14.85	AVG
0.2099	42.00	11.06	53.06	63.21	-10.15	QP
0.2099	26.09	11.06	37.15	53.21	-16.06	AVG
0.6580	39.45	10.54	49.99	56.00	-6.01	QP
0.6580	26.76	10.54	37.30	46.00	-8.70	AVG
7.0499	32.08	10.73	42.81	60.00	-17.19	QP
7.0499	18.00	10.73	28.73	50.00	-21.27	AVG
12.3579	33.60	10.86	44.46	60.00	-15.54	QP
12.3579	19.48	10.86	30.34	50.00	-19.66	AVG
27.0659	42.92	11.18	54.10	60.00	-5.90	QP
27.0659	29.56	11.18	40.74	50.00	-9.26	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

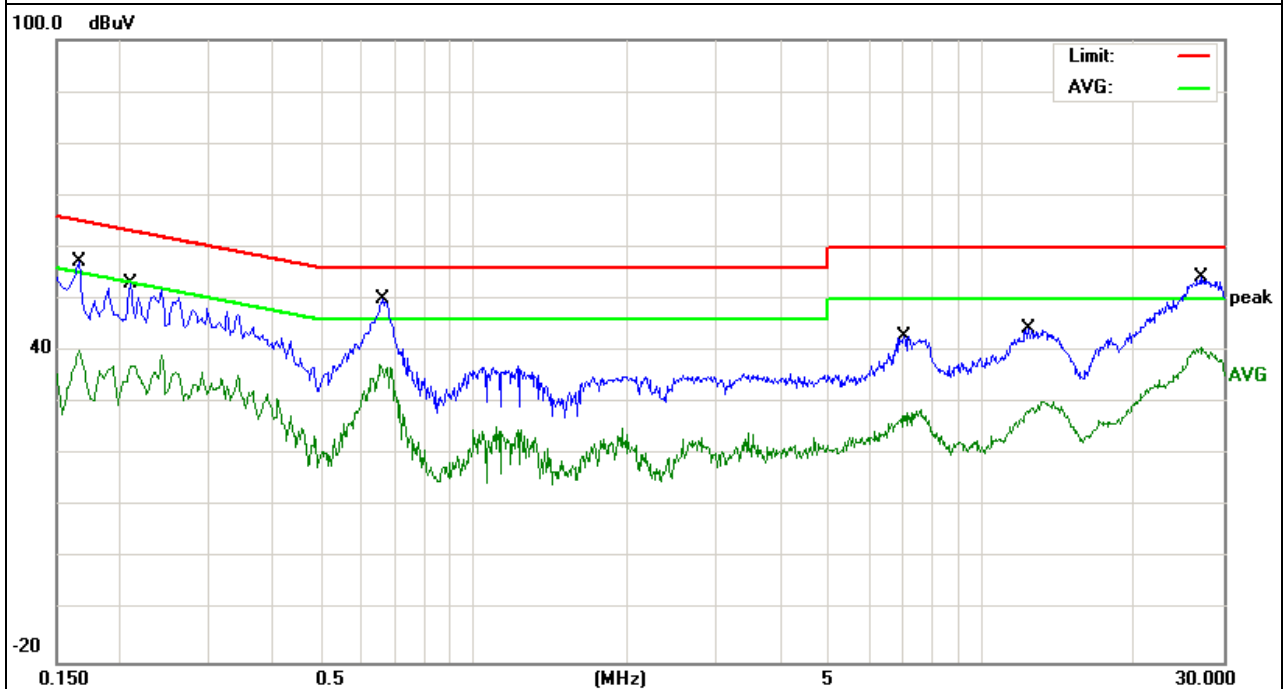


EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from notebook	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1700	45.84	11.41	57.25	64.96	-7.71	QP
0.1700	29.20	11.41	40.61	54.96	-14.35	AVG
0.6700	39.29	10.54	49.83	56.00	-6.17	QP
0.6700	27.28	10.54	37.82	46.00	-8.18	AVG
1.2139	27.22	10.52	37.74	56.00	-18.26	QP
1.2139	15.39	10.52	25.91	46.00	-20.09	AVG
7.5618	19.06	10.75	29.81	50.00	-20.19	AVG
7.6418	32.39	10.75	43.14	60.00	-16.86	QP
13.2858	33.07	10.88	43.95	60.00	-16.05	QP
13.2858	18.74	10.88	29.62	50.00	-20.38	AVG
27.3019	43.01	11.18	54.19	60.00	-5.81	QP
27.3019	29.11	11.18	40.29	50.00	-9.71	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

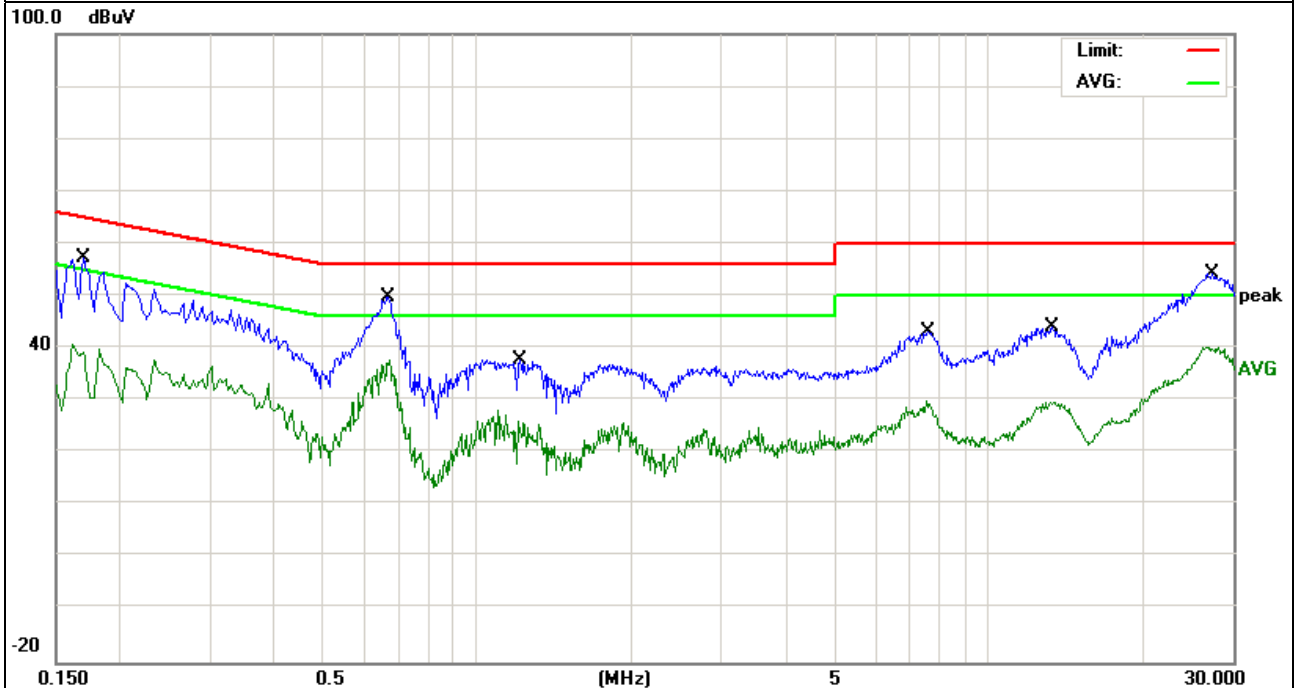

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

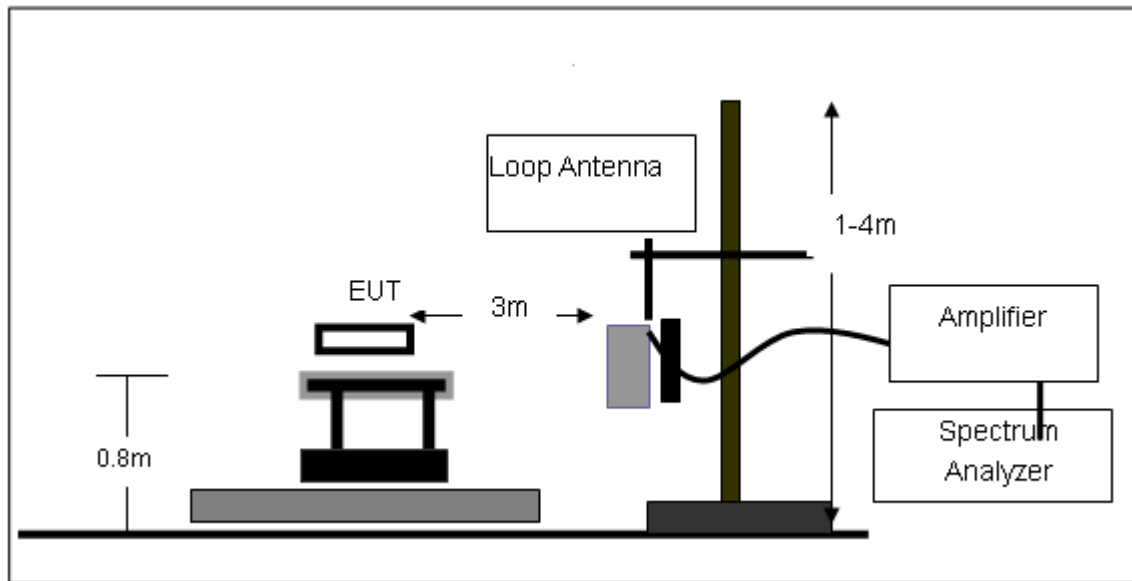

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

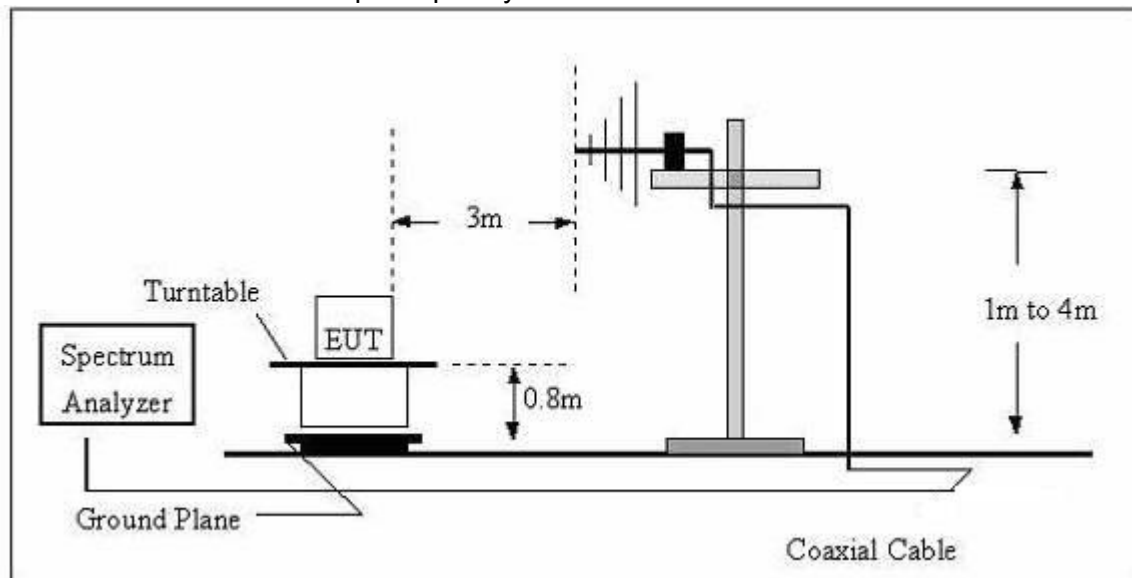

(C) Radiated Emission Test-Up Frequency Above 1GHz

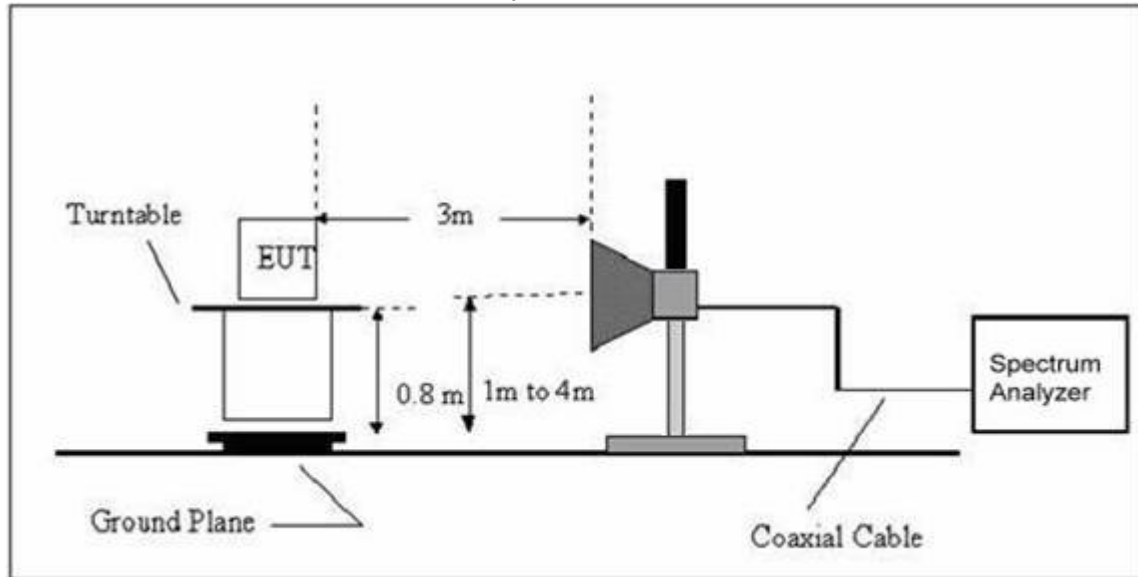

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode :	TX

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
82.3588	18.21	8.17	26.38	40.00	-13.62	QP
98.4865	14.48	10.45	24.93	43.50	-18.57	QP
224.5192	19.46	10.70	30.16	46.00	-15.84	QP
239.9874	21.09	11.65	32.74	46.00	-13.26	QP
360.4476	26.64	16.46	43.10	46.00	-2.90	QP
480.5276	14.12	20.04	34.16	46.00	-11.84	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

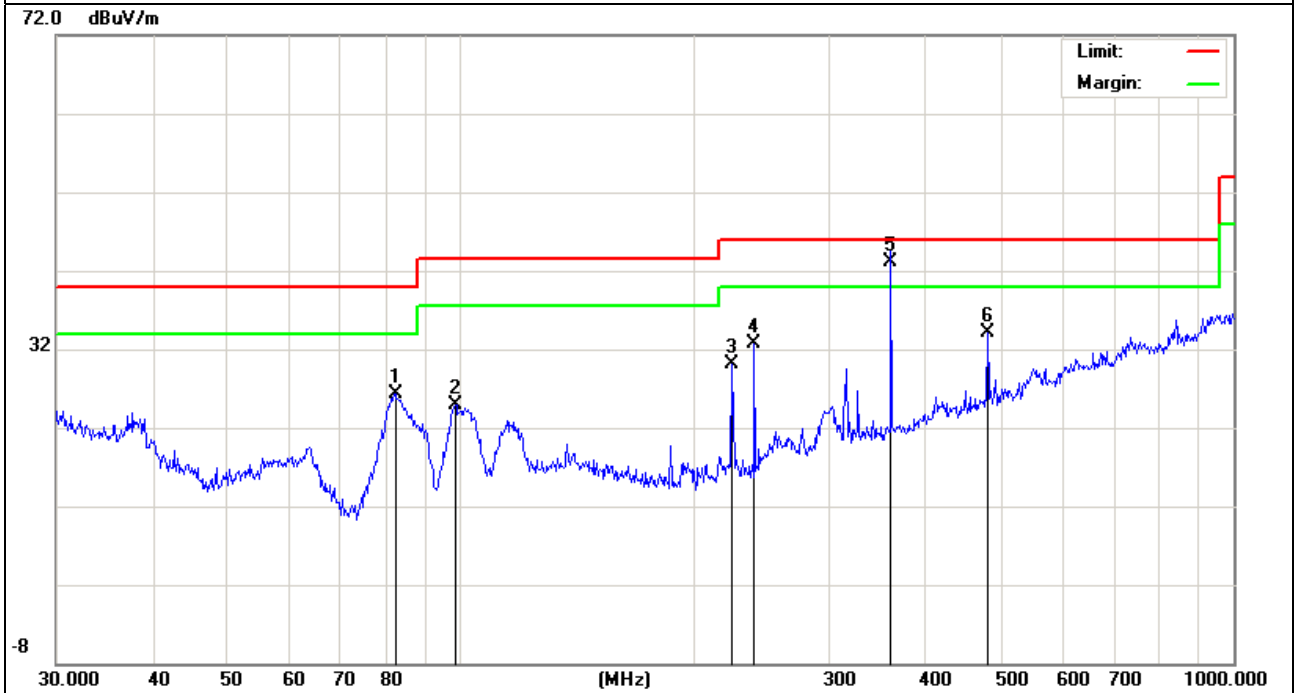


EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode :	TX

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
38.212	23.07	14.27	37.34	40.00	-2.66	QP
82.0706	25.57	8.11	33.68	40.00	-6.32	QP
98.1419	18.82	10.40	29.22	43.50	-14.28	QP
137.9028	13.75	12.20	25.95	43.50	-17.55	QP
360.4476	21.46	16.46	37.92	46.00	-8.08	QP
480.5276	12.41	20.04	32.45	46.00	-13.55	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

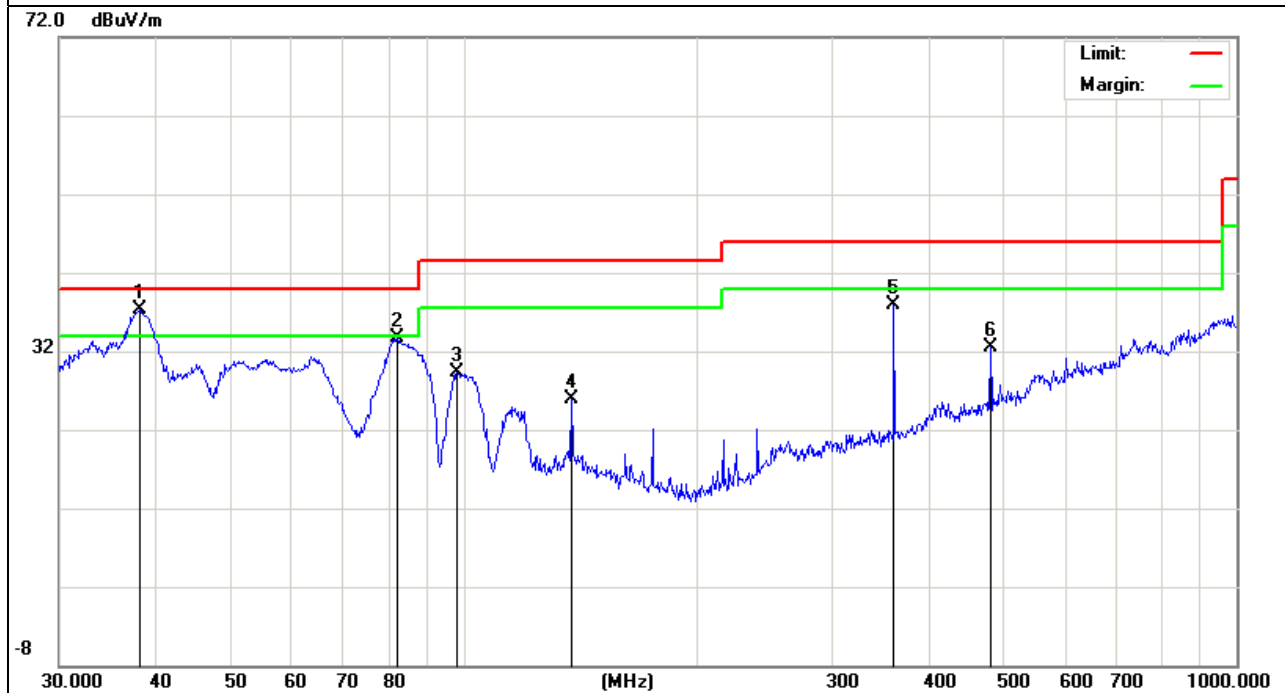


EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode :	TX with 3G Dongle

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
50.5860	13.38	7.99	21.37	40.00	-18.63	QP
175.6516	16.43	10.08	26.51	43.50	-16.99	QP
242.5253	14.67	12.16	26.83	46.00	-19.17	QP
360.4476	26.03	16.46	42.49	46.00	-3.51	QP
576.6443	11.48	22.44	33.92	46.00	-12.08	QP
721.7259	11.97	25.59	37.56	46.00	-8.44	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

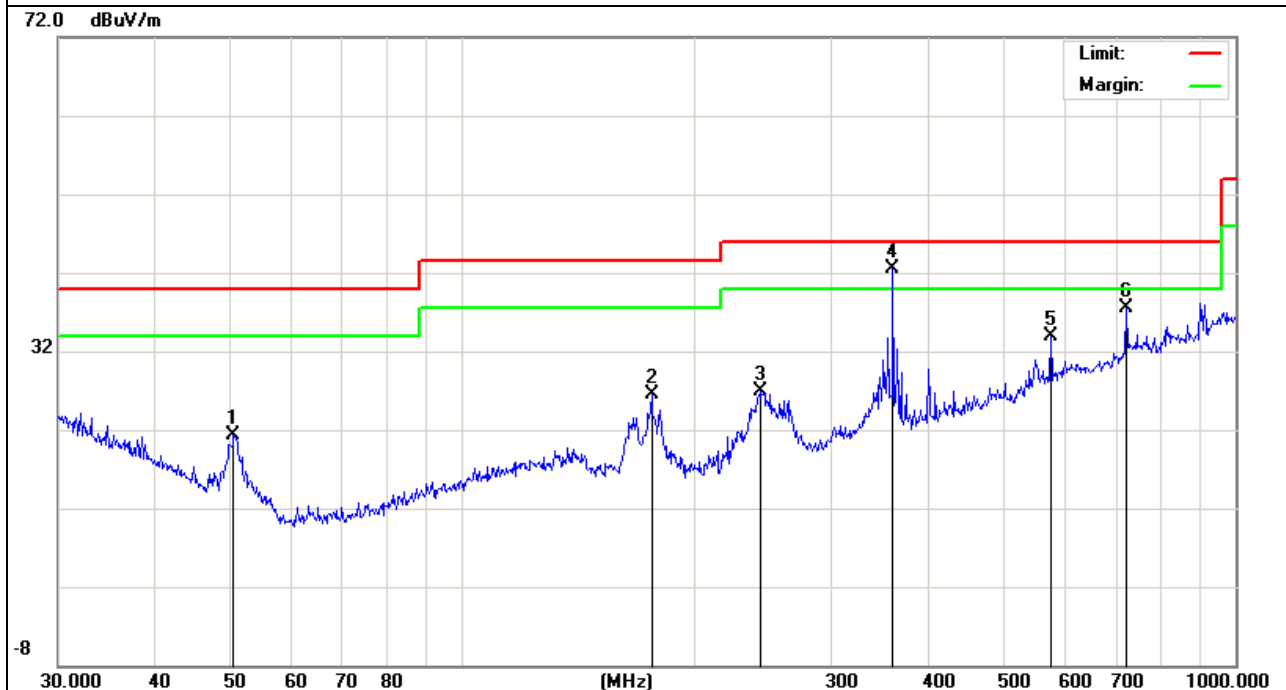


EUT :	Portable 3G Wireless Router	Model Name. :	JWA-2018R
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode :	TX with 3G Dongle

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
50.2324	28.06	8.15	36.21	40.00	-3.79	QP
130.3789	11.80	12.20	24.00	43.50	-19.50	QP
315.4808	13.36	15.26	28.62	46.00	-17.38	QP
360.4476	17.05	16.46	33.51	46.00	-12.49	QP
434.0651	21.88	18.84	40.72	46.00	-5.28	QP
721.7259	9.63	25.59	35.22	46.00	-10.78	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

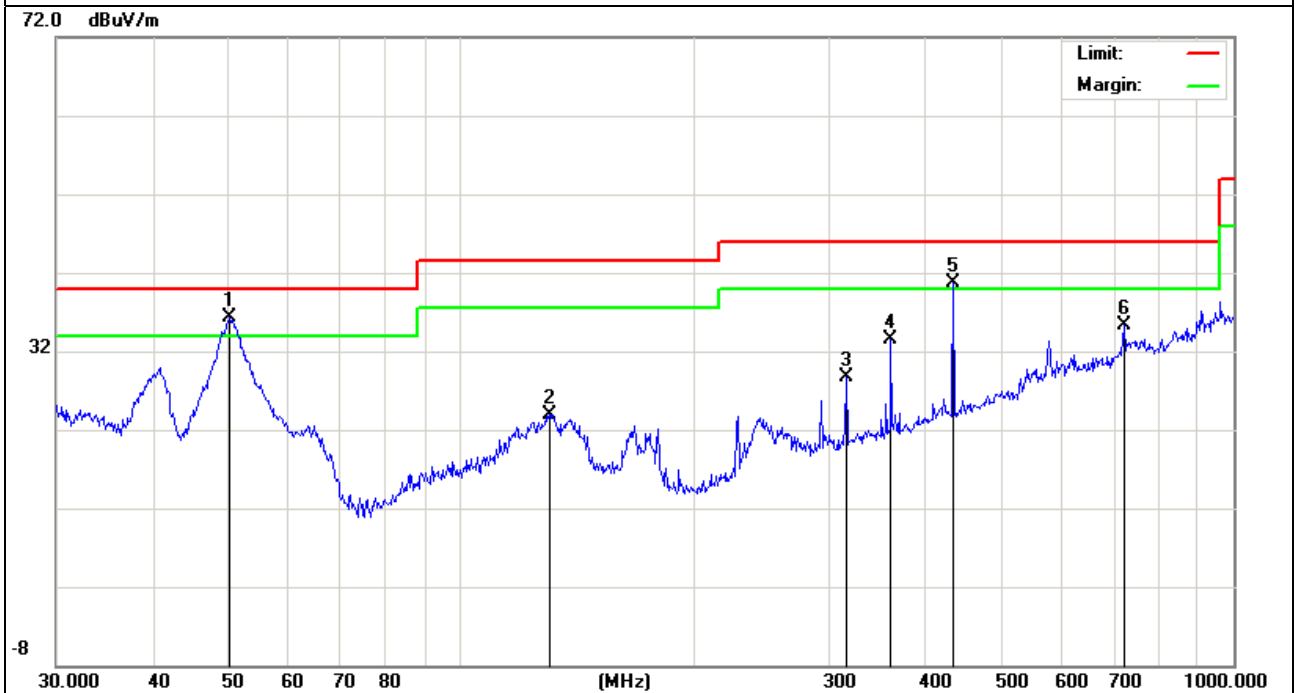

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Radiated Spurious Emission

802.11b

Normal Voltage

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412							
Vertical	4824.000	47.15	10.44	57.59	74.0	-16.41	Pk
Vertical	4824.000	30.01	10.44	40.45	54.0	-13.55	AV
Vertical	7236.000	36.88	12.39	49.27	74.0	-24.73	pk
Horizontal	4824.000	44.58	10.44	55.02	74.0	-18.98	pk
Horizontal	4824.000	28.17	10.44	38.61	54.0	-15.39	AV
Horizontal	7236.000	30.06	12.39	42.45	74.0	-31.55	pk
operation frequency:2437							
Vertical	4874.000	48.36	10.40	58.76	74.0	-15.24	pk
Vertical	4874.000	32.34	10.40	42.74	54.0	-11.26	AV
Vertical	7311.000	38.26	12.75	51.01	74.0	-22.99	Pk
Horizontal	4874.000	47.13	10.40	57.53	74.0	-16.47	Pk
Horizontal	4874.000	30.47	10.40	40.87	54.0	-13.13	AV
Horizontal	7311.000	31.76	12.75	44.51	74.0	-29.49	Pk
operation frequency:2462							
Vertical	4924.000	47.88	10.39	58.27	74.0	-15.73	pk
Vertical	4924.000	31.05	10.39	41.44	54.0	-12.56	AV
Vertical	7386.000	34.55	12.68	47.23	74.0	-26.77	pk
Horizontal	4924.000	45.69	10.39	56.08	74.0	-17.92	pk
Horizontal	4924.000	30.43	10.39	40.82	54.0	-13.18	AV
Horizontal	7386.000	32.08	12.68	44.76	74.0	-29.24	pk
Remark:							
Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit							

With 3G dongle

802.11b



Normal Voltage

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412							
Vertical	4824.000	49.07	10.44	59.51	74	-14.49	Pk
Vertical	4824.000	33.87	10.44	44.31	54	-9.69	AV
Vertical	7236.000	41.08	12.39	53.47	74	-20.53	pk
Horizontal	4824.000	49.77	10.44	60.21	74	-13.79	pk
Horizontal	4824.000	34.08	10.44	44.52	54	-9.48	AV
Horizontal	7236.000	37.85	12.39	50.24	74	-23.76	pk
operation frequency:2437							
Vertical	4874.000	54.98	10.4	65.38	74	-8.62	pk
Vertical	4874.000	37.01	10.4	47.41	54	-6.59	AV
Vertical	7311.000	40.43	12.75	53.18	74	-20.82	Pk



Horizontal	4874.000	51.38	10.4	61.78	74	-12.22	Pk
Horizontal	4874.000	34.89	10.4	45.29	54	-8.71	AV
Horizontal	7311.000	37.11	12.75	49.86	74	-24.14	Pk
operation frequency:2462							
Vertical	4924.000	49.32	10.39	59.71	74	-14.29	pk
Vertical	4924.000	34.56	10.39	44.95	54	-9.05	AV
Vertical	7386.000	37.56	12.68	50.24	74	-23.76	pk
Horizontal	4924.000	48.34	10.39	58.73	74	-15.27	pk
Horizontal	4924.000	34.21	10.39	44.60	54	-9.40	AV
Horizontal	7386.000	35.11	12.68	47.79	74	-26.21	pk
Remark:							
Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit							

Note: Scan with 802.11b, 802.11g,802.11n(20M/40M),the worst case is 802.11b
When the PK value is lower than the Average value limit, average didn't record.



Conducted Spurious Emissions at Antenna Port: 802.11b Low Channel

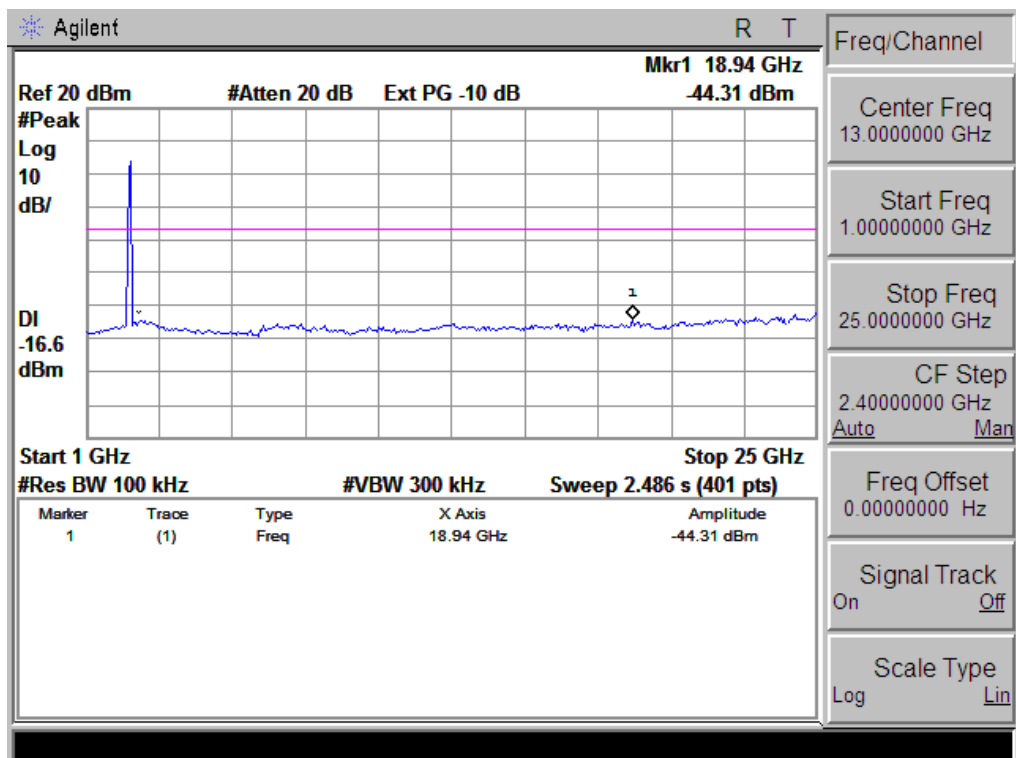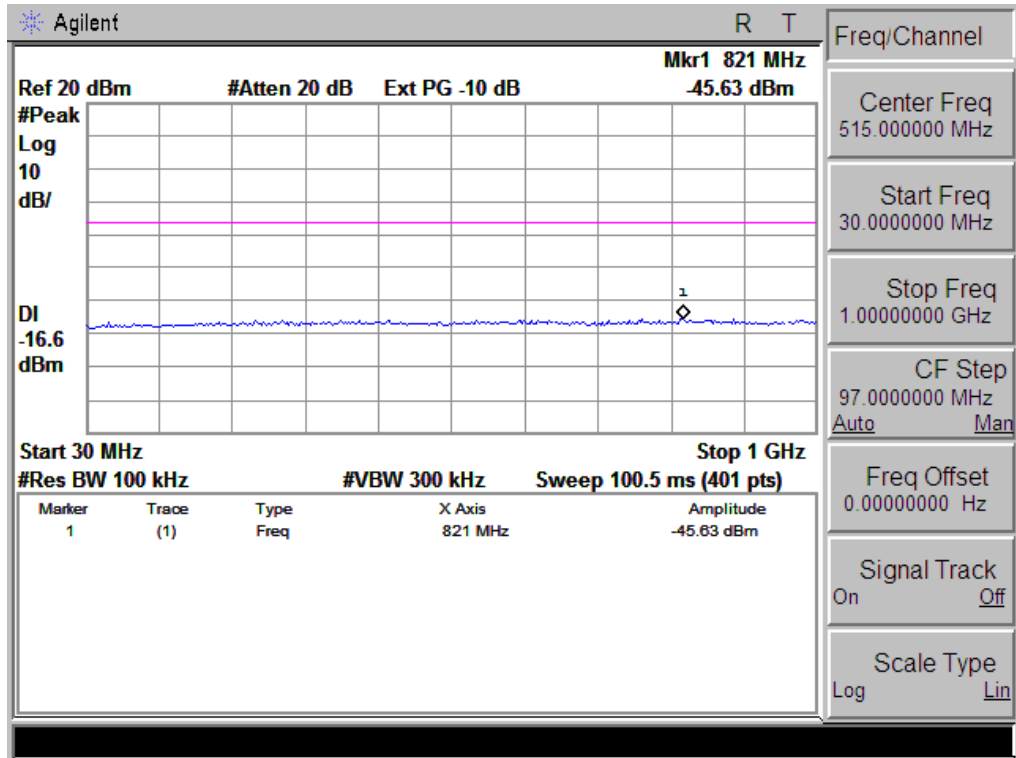



802.11b Middle Channel

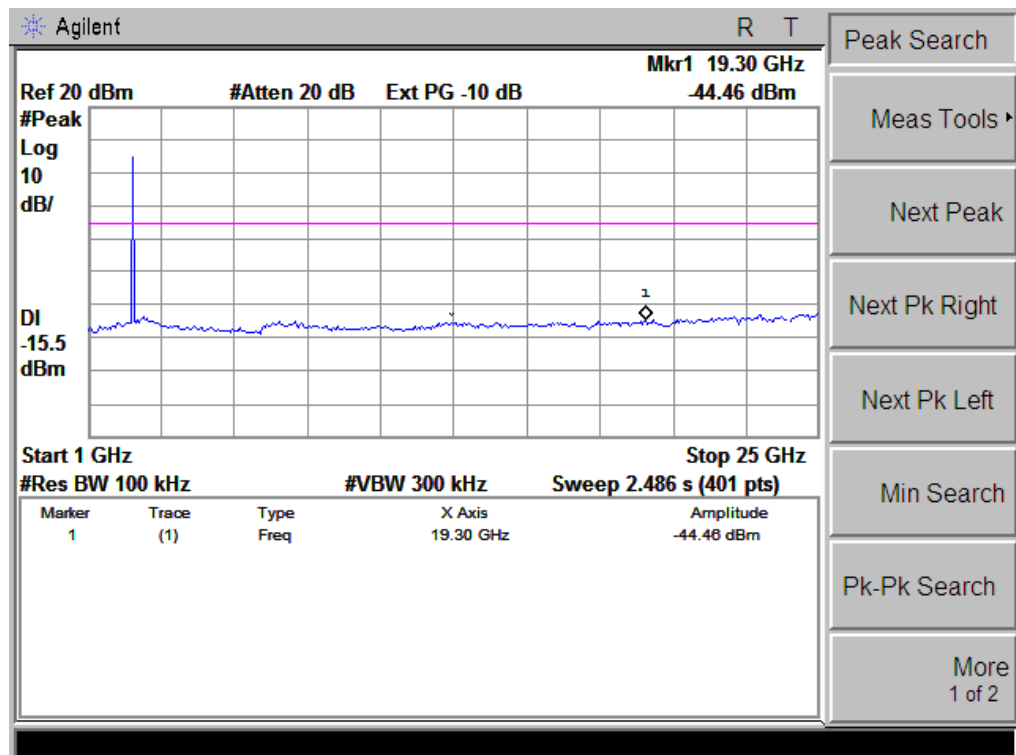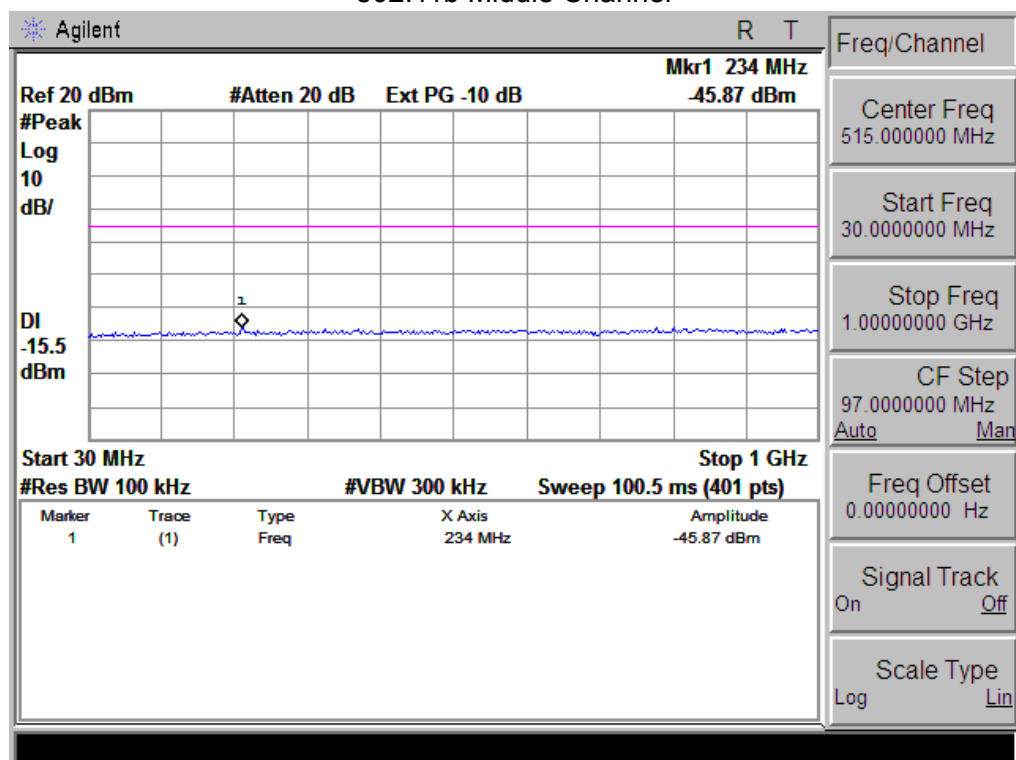



802.11b High Channel

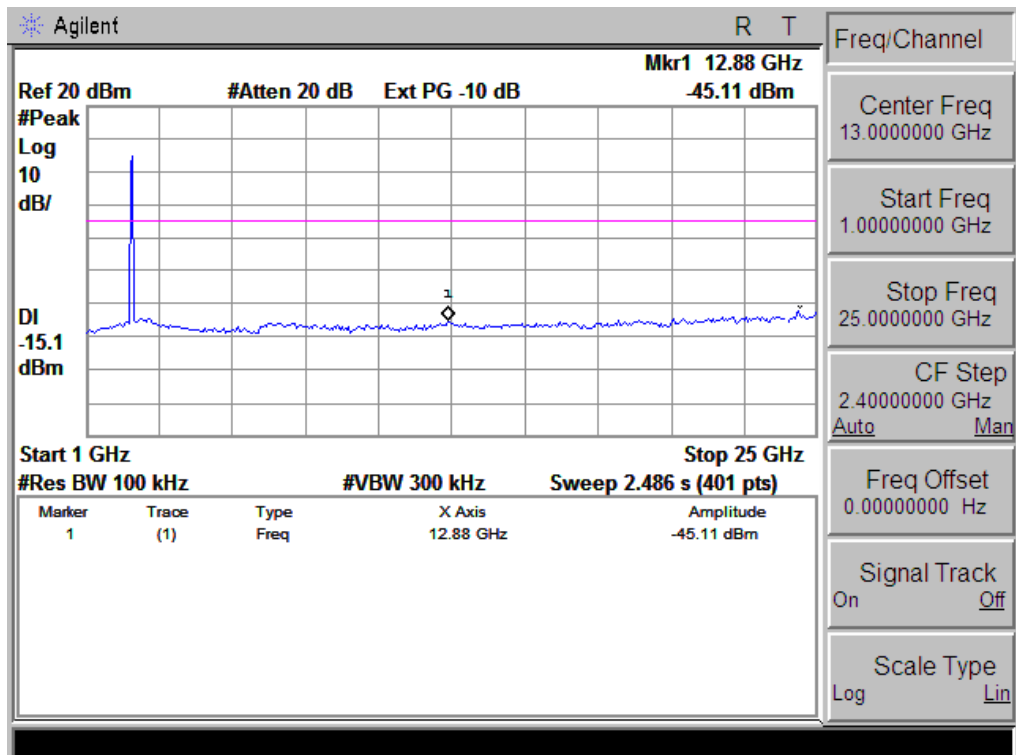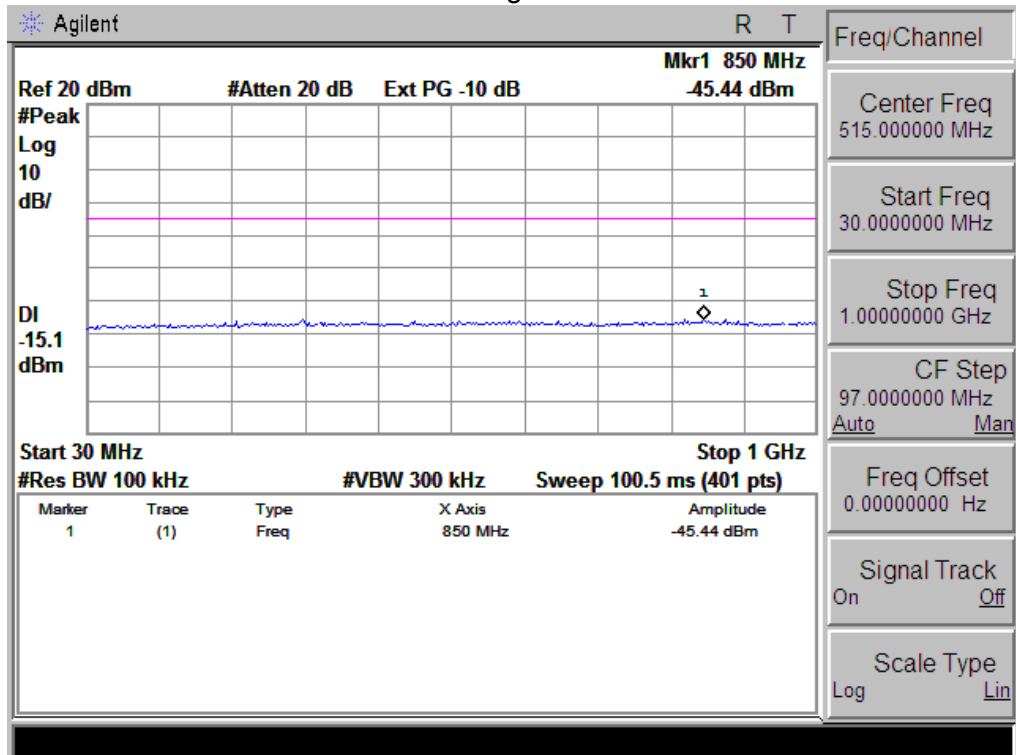



802.11g Low Channel

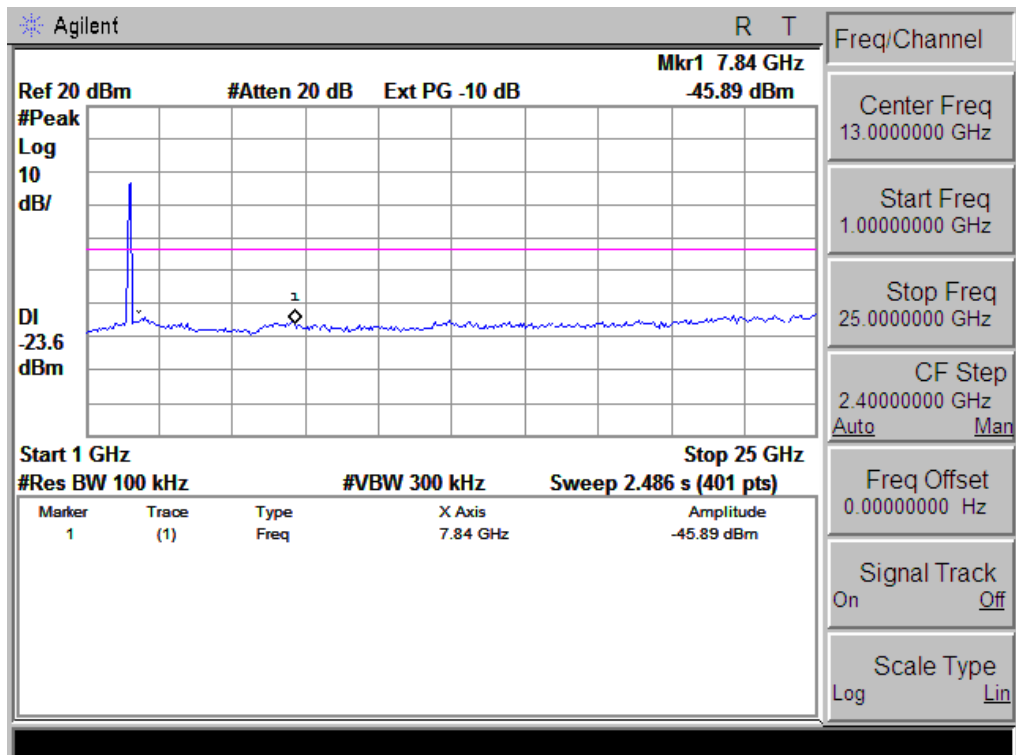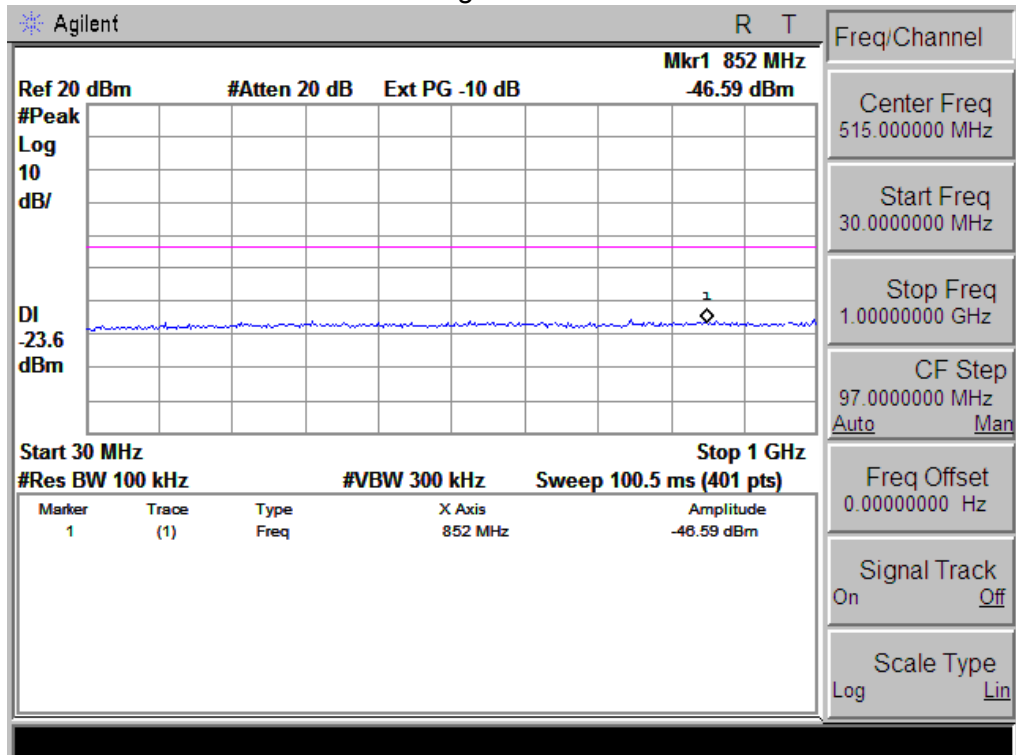



802.11g Middle Channel

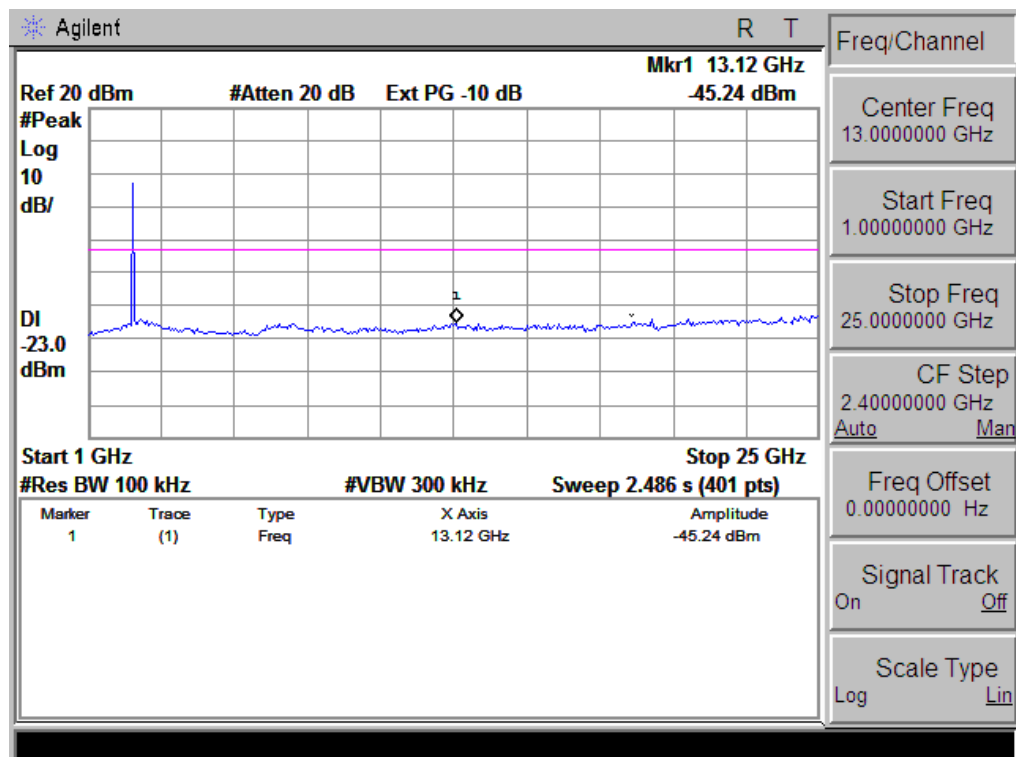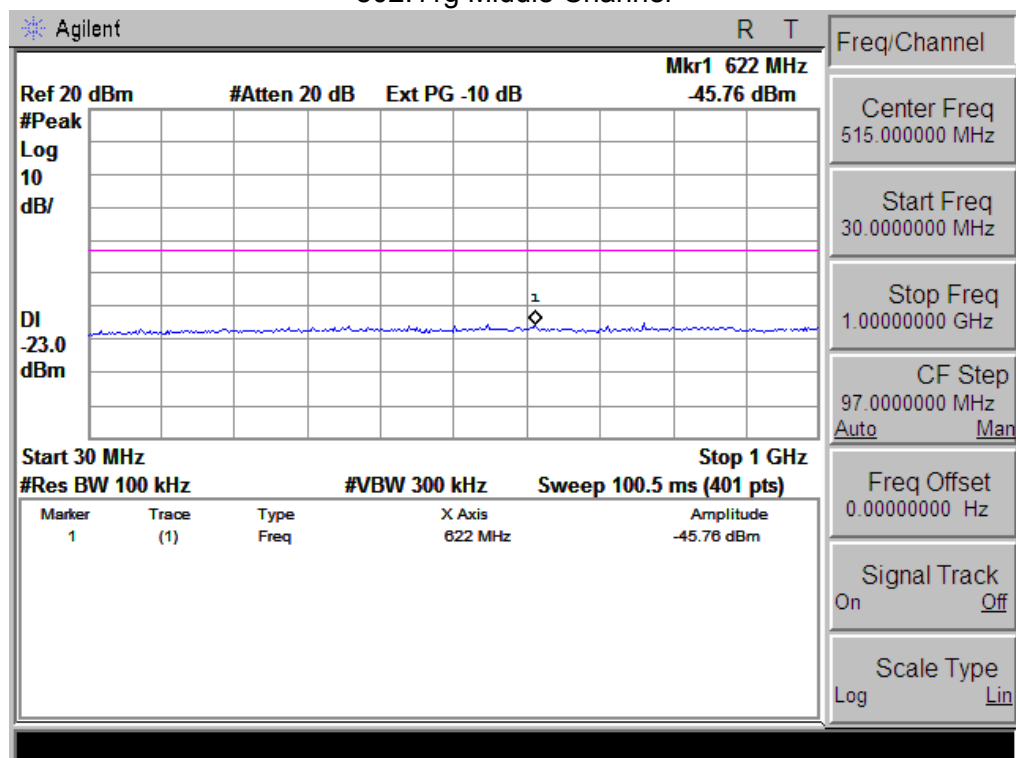



802.11g High Channel

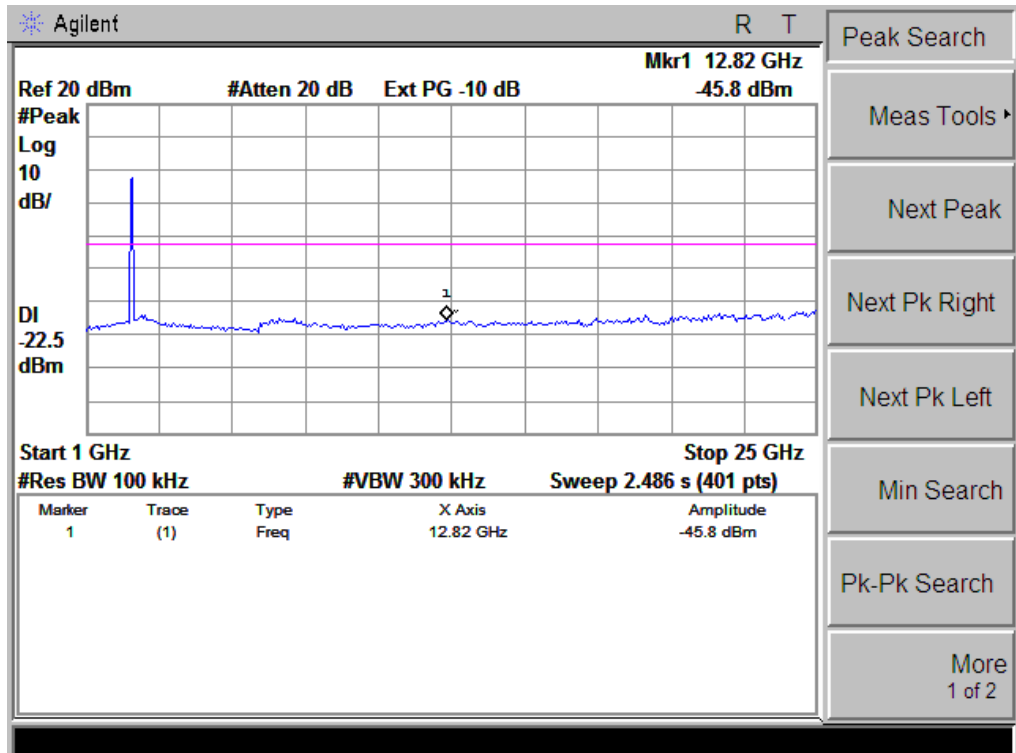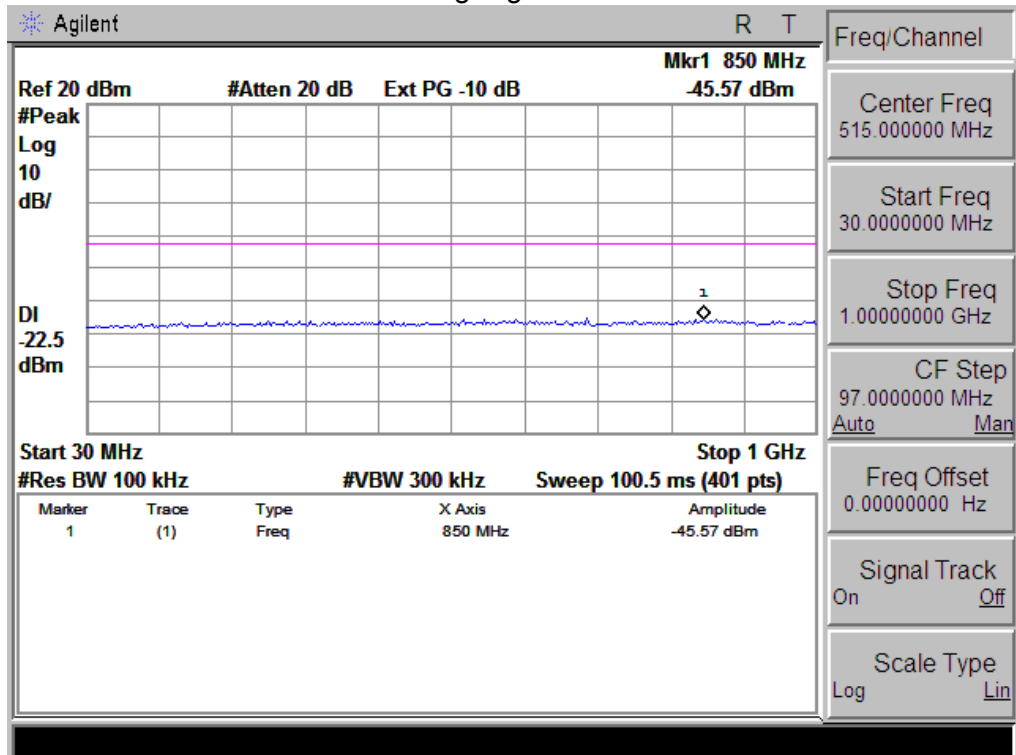



802.11n-HT20 Low Channel

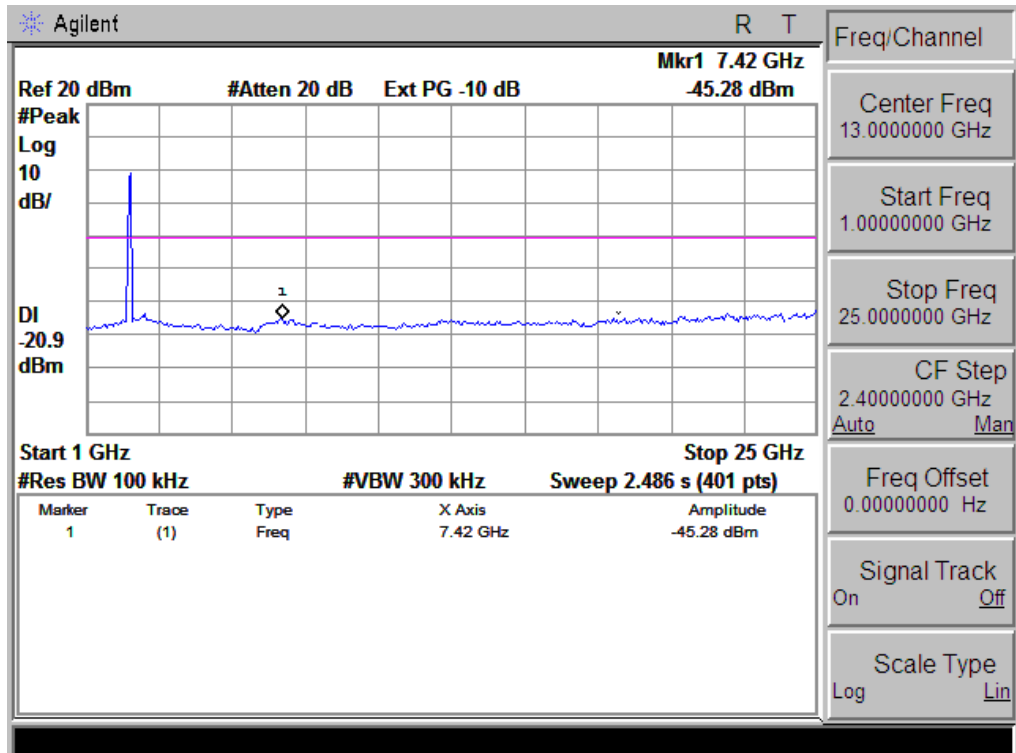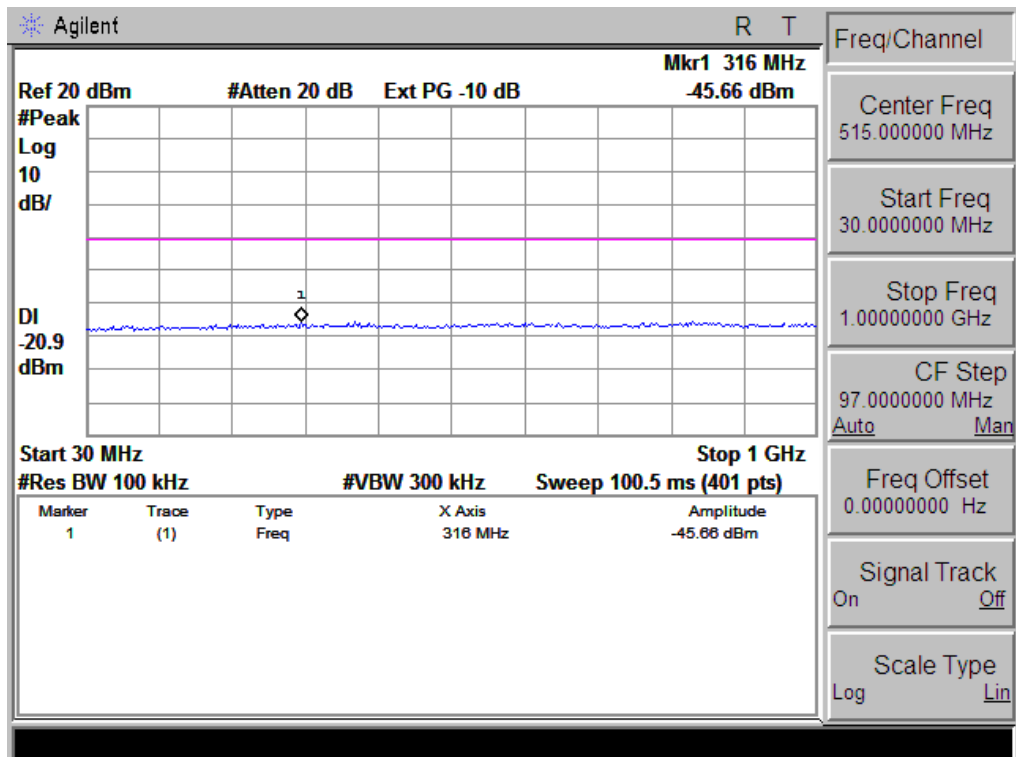



802.11n-HT20 Middle Channel

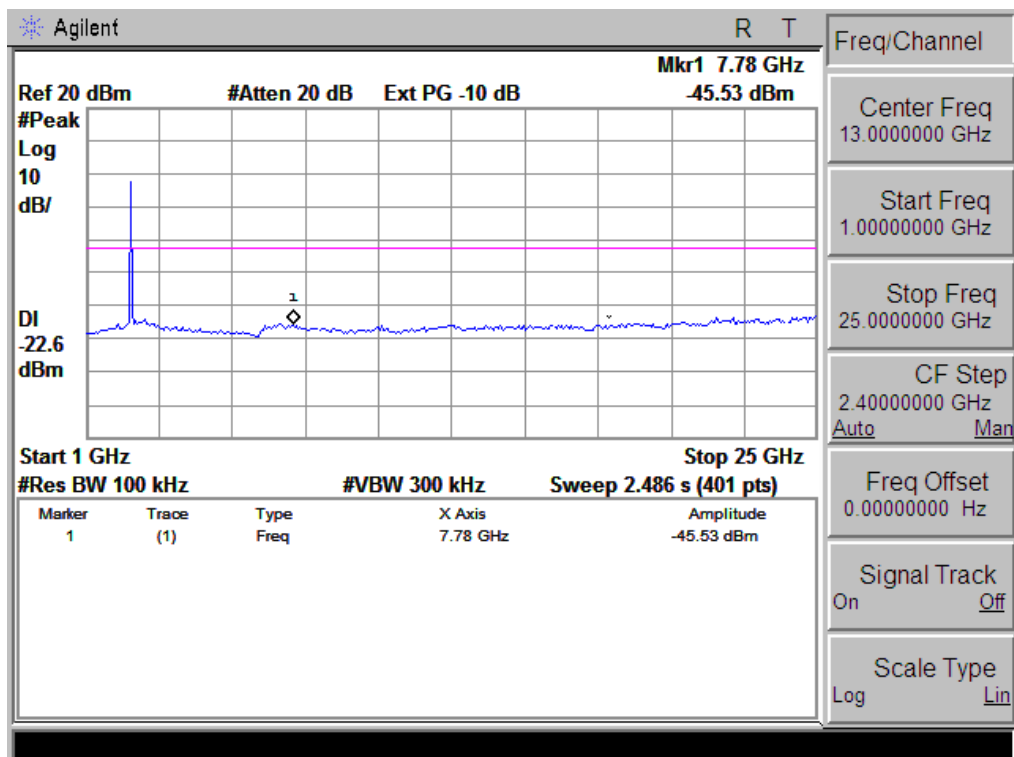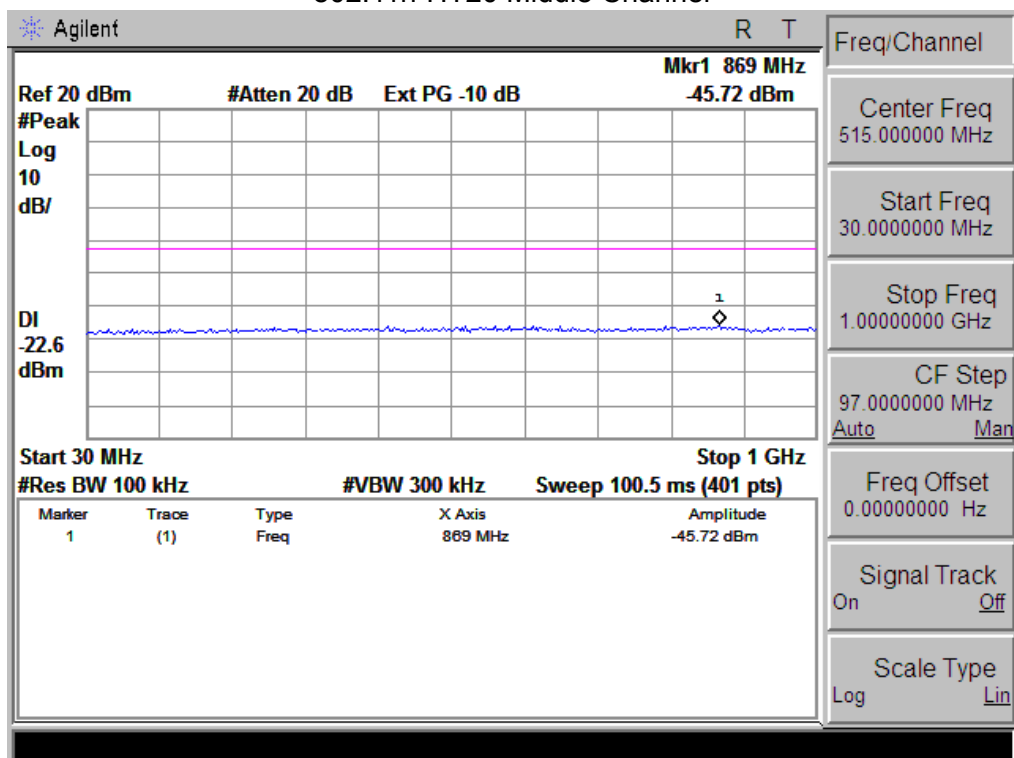



802.11n-HT20 High Channel

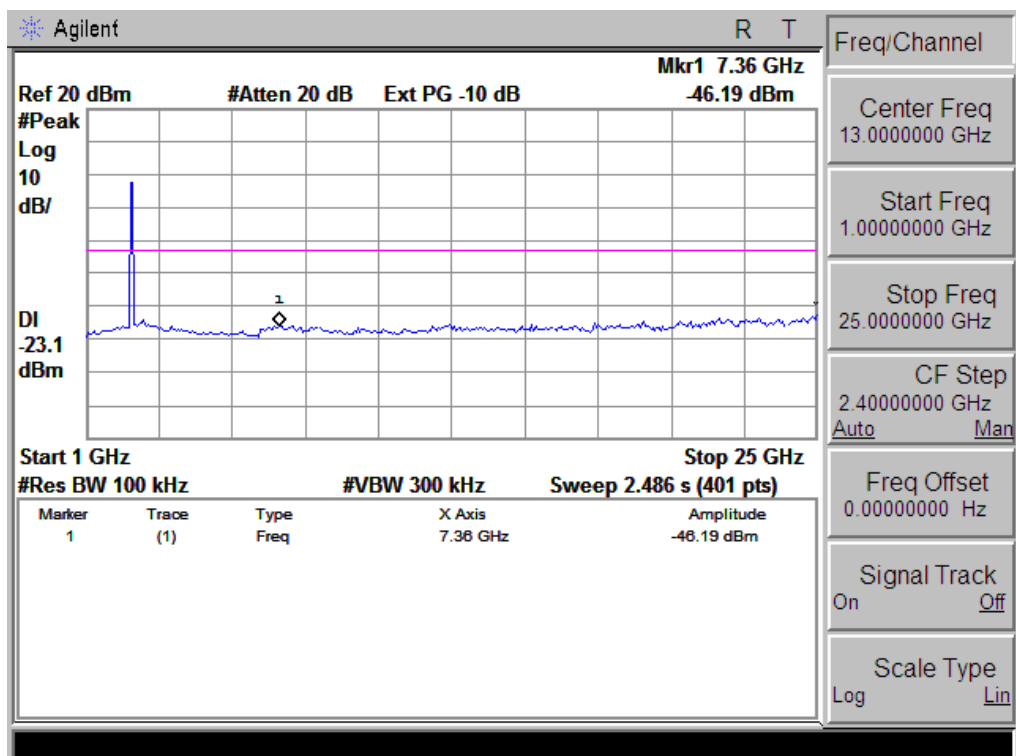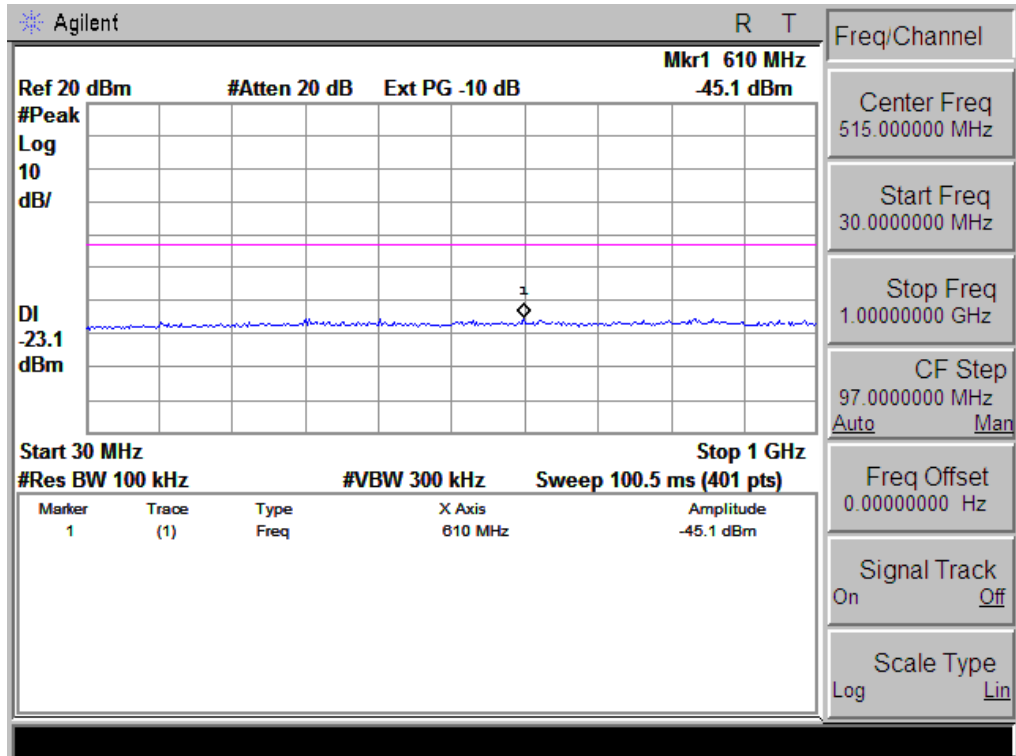



802.11n-HT40 Low Channel

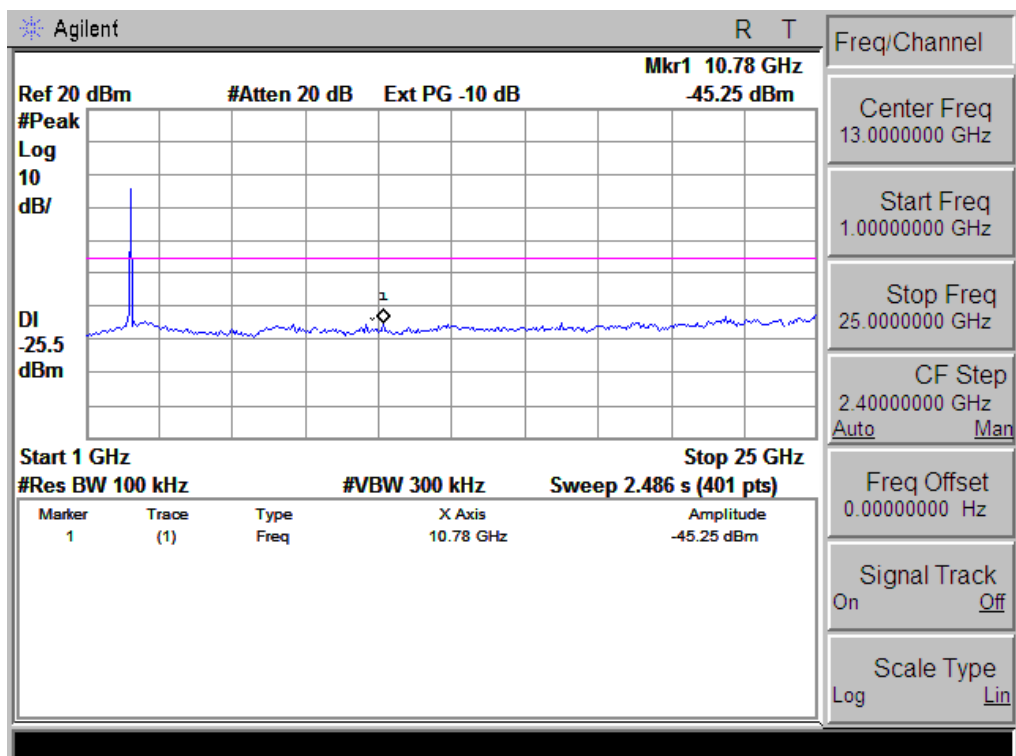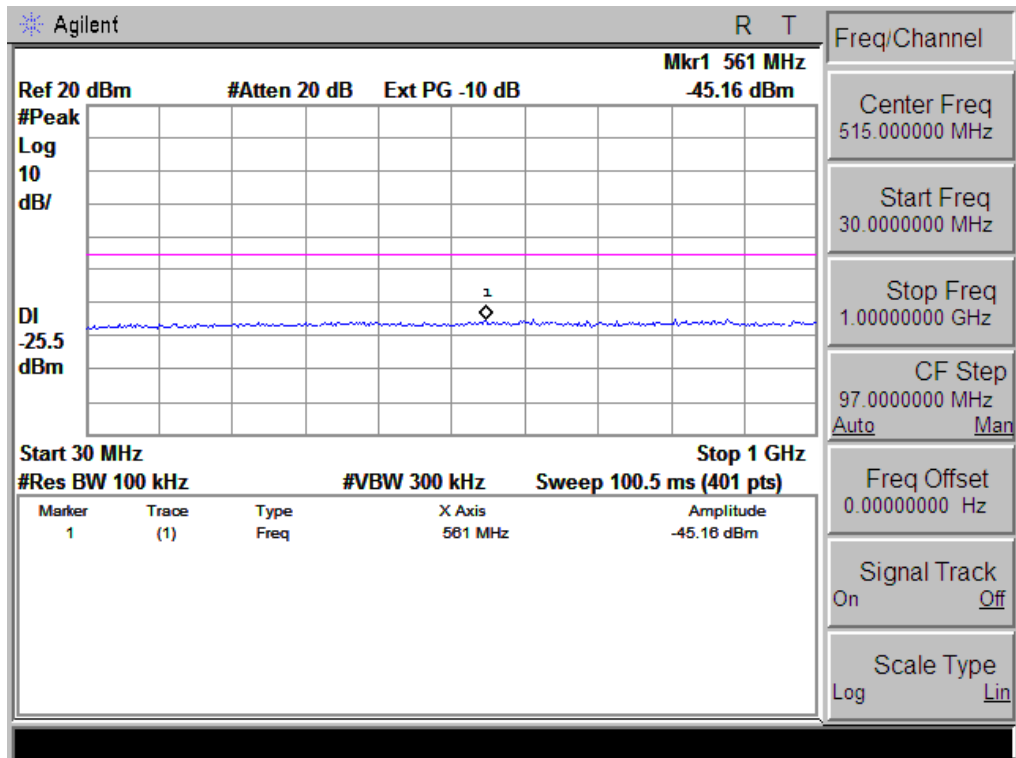

802.11n-HT40 Middle Channel

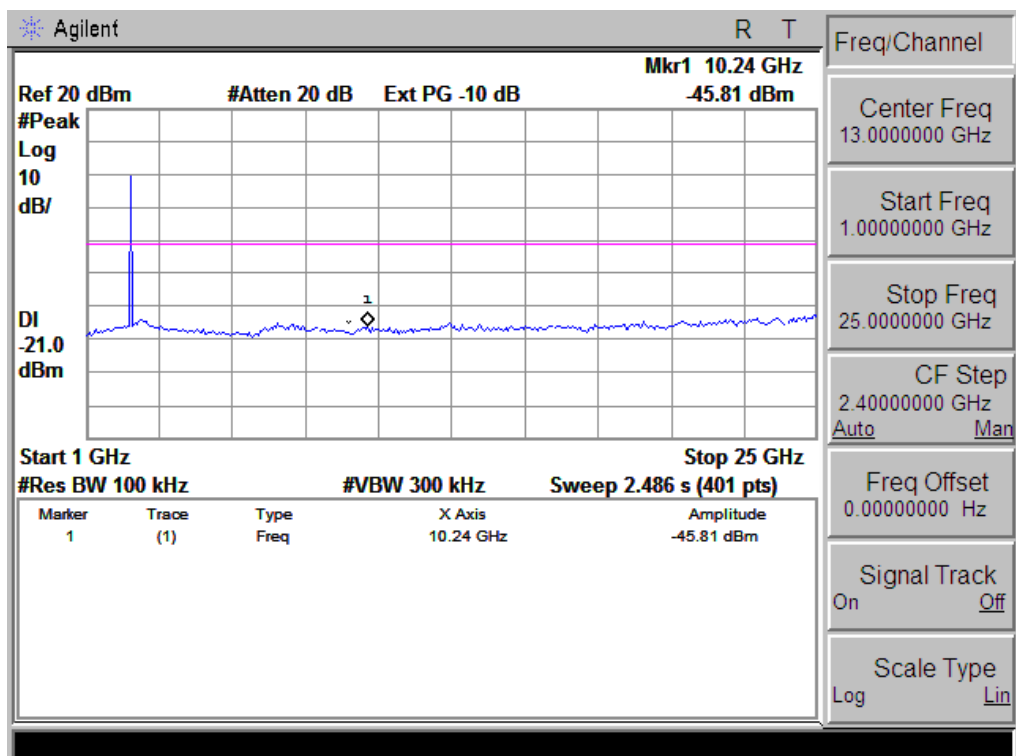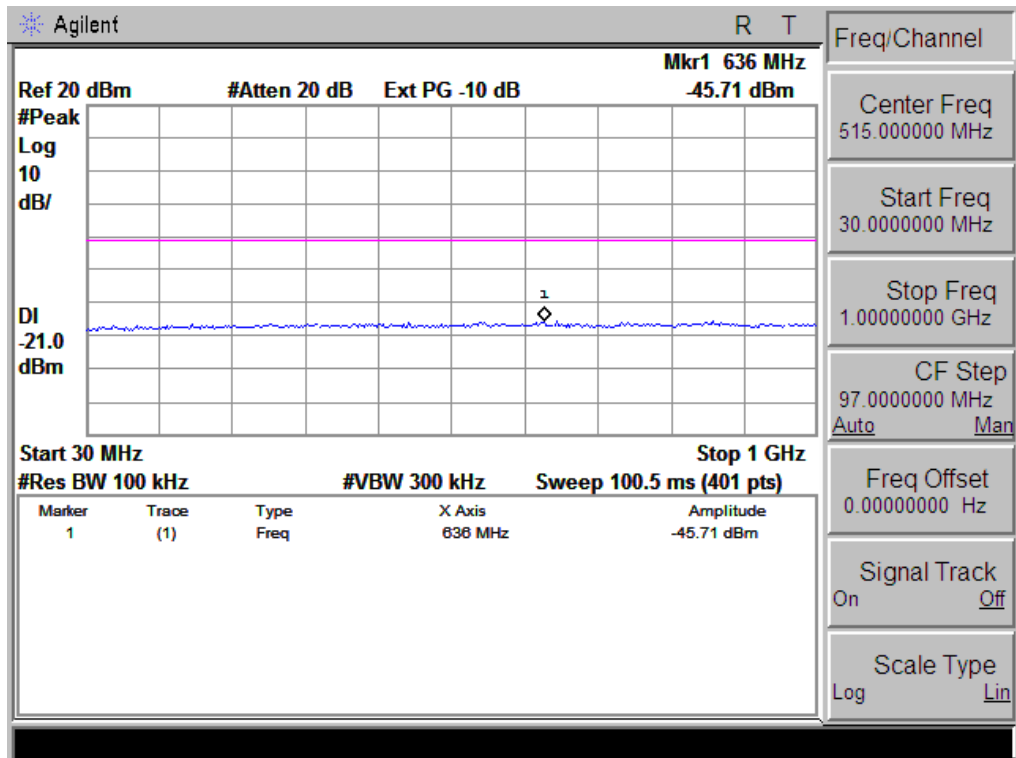

802.11n-HT40 High Channel

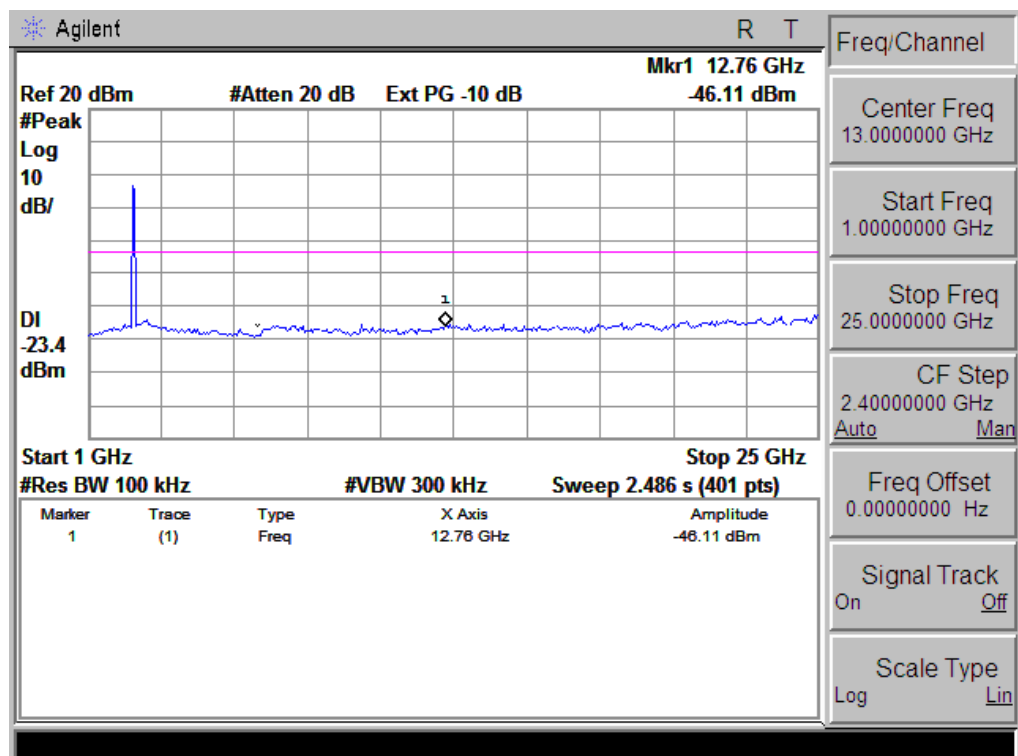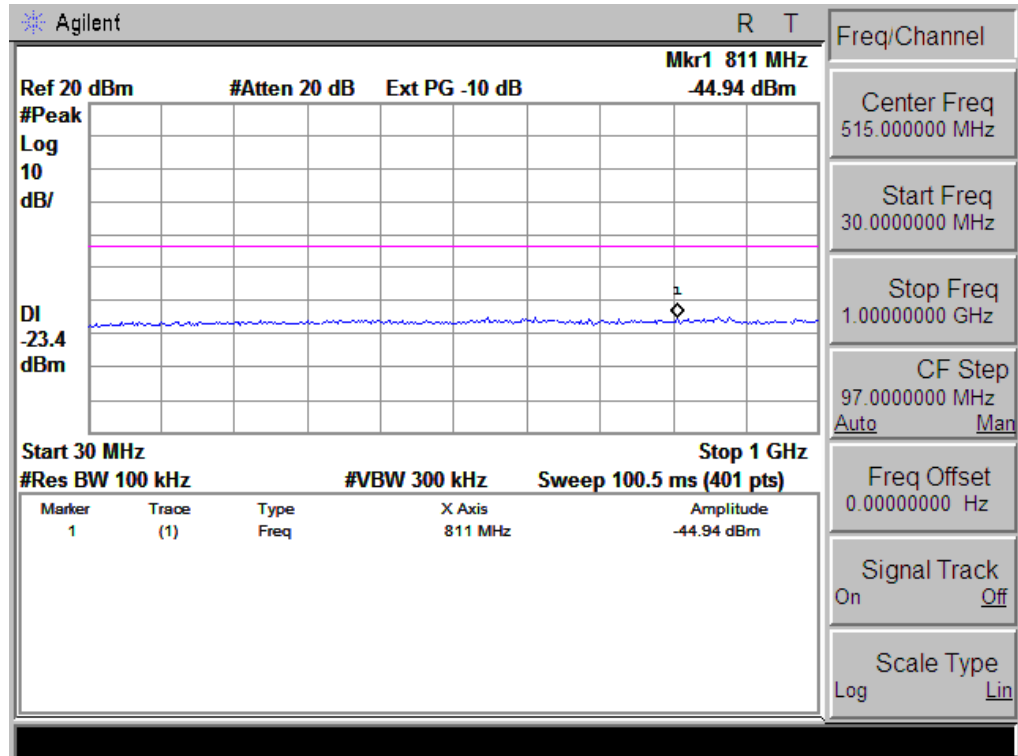

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

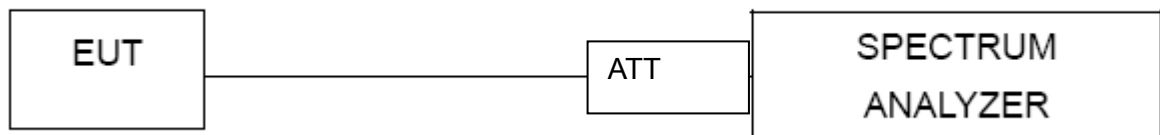


4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.16	8	PASS
2437 MHz	-14.76	8	PASS
2462 MHz	-18.65	8	PASS


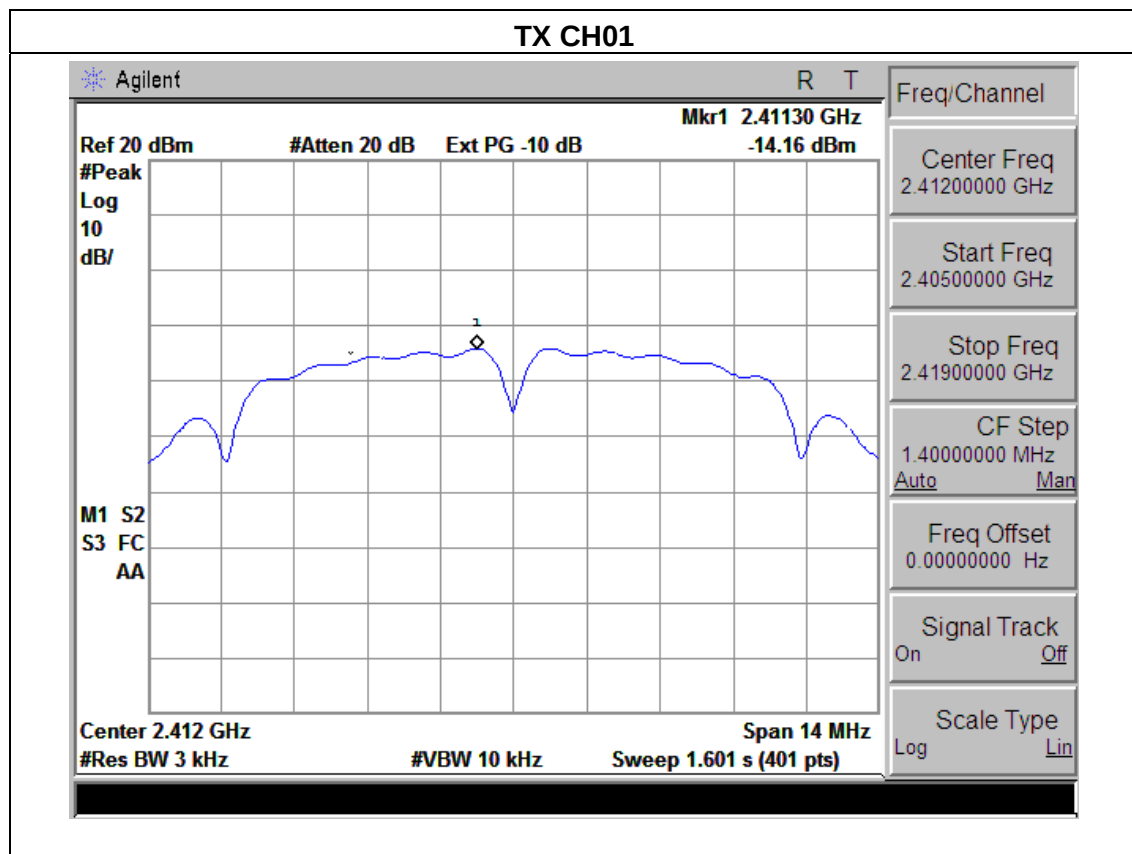


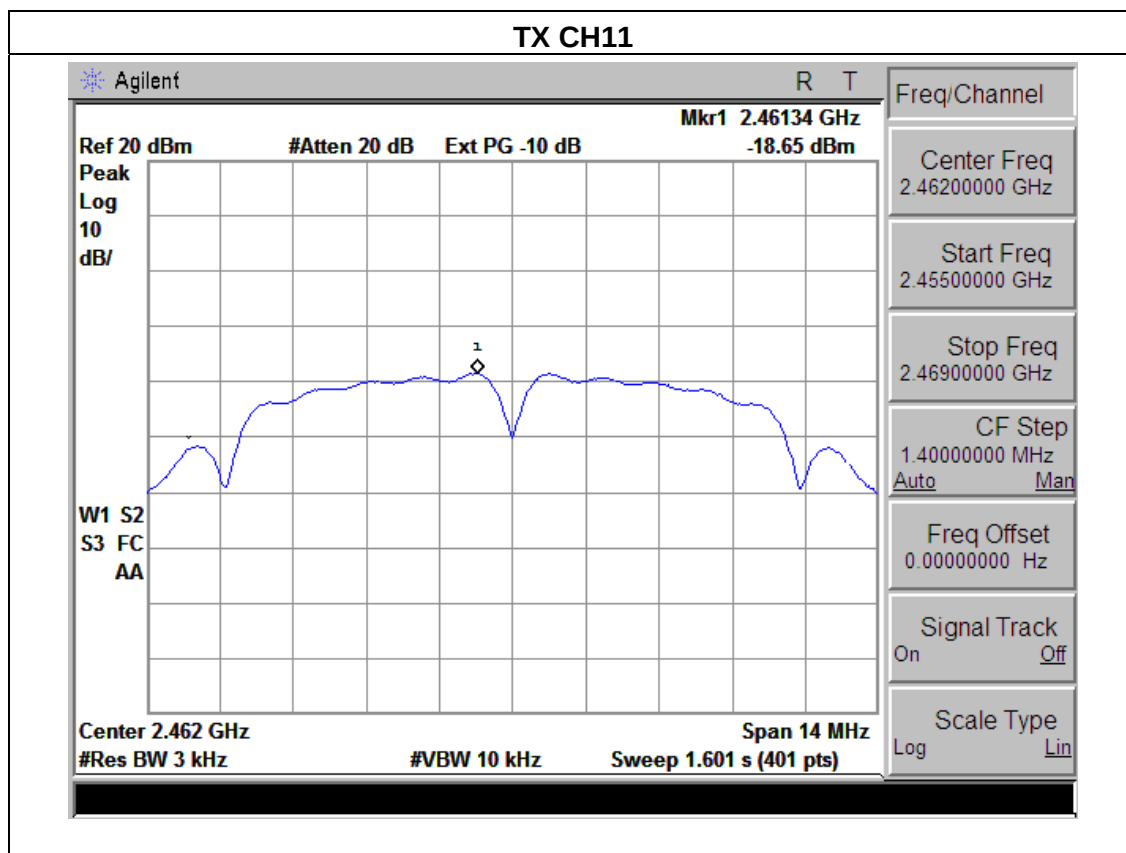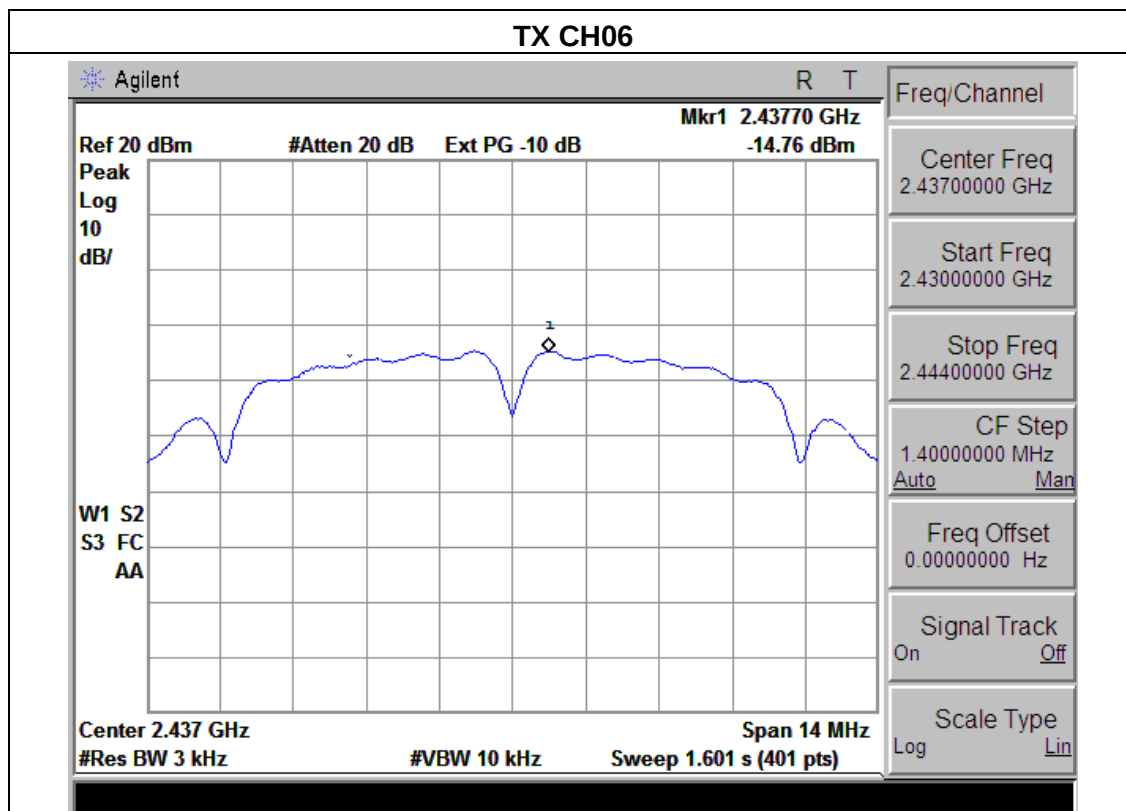

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-17.65	8	PASS
2437 MHz	-20.38	8	PASS
2462 MHz	-20.97	8	PASS


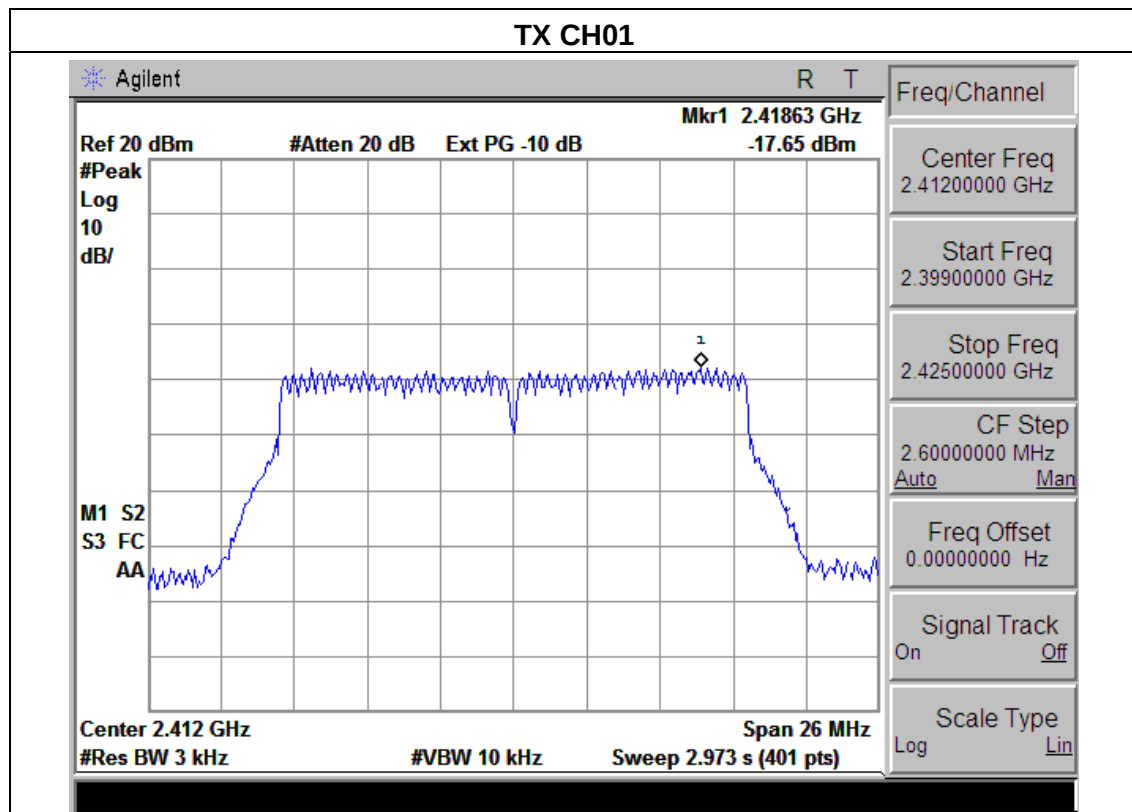


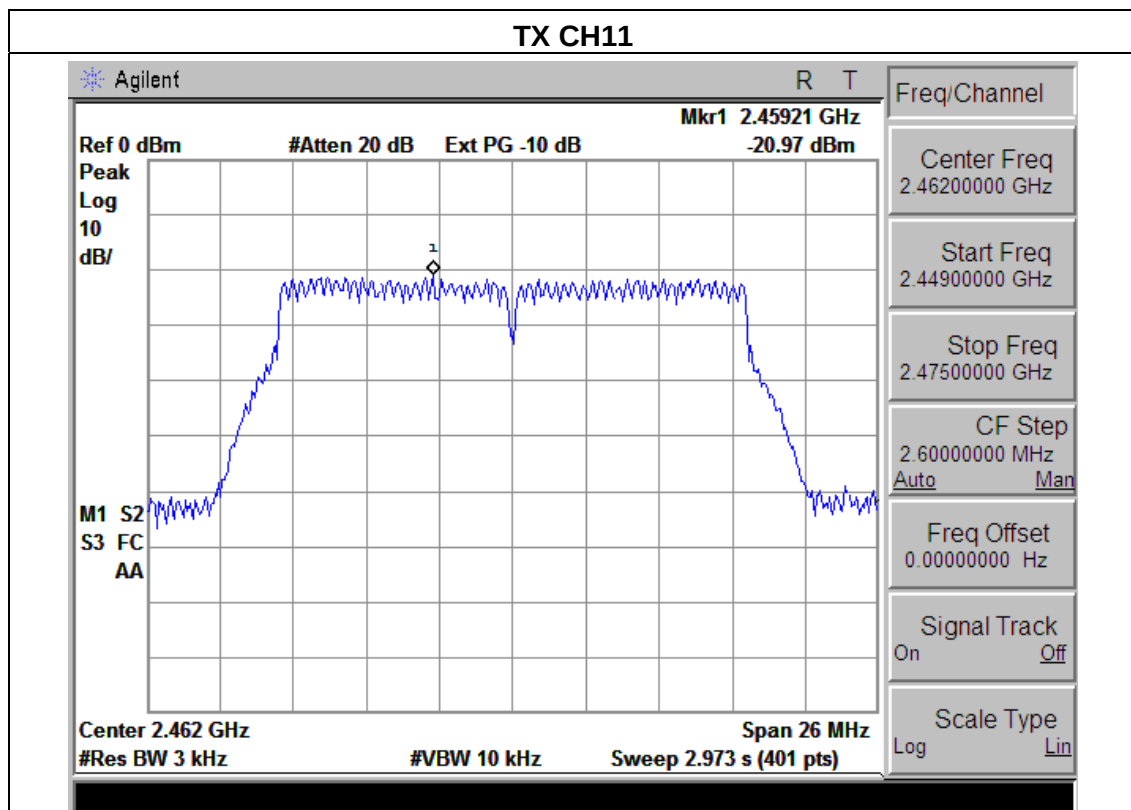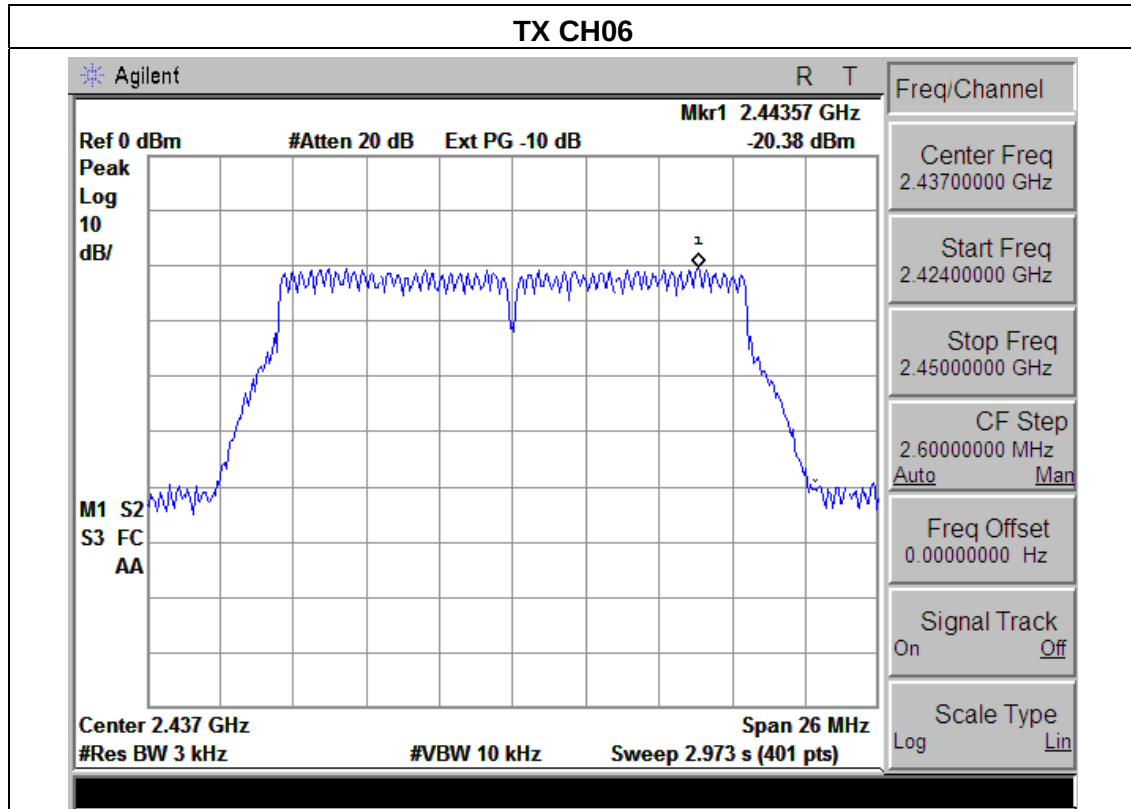

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-16.12	8	PASS
2437 MHz	-15.80	8	PASS
2462 MHz	-15.70	8	PASS


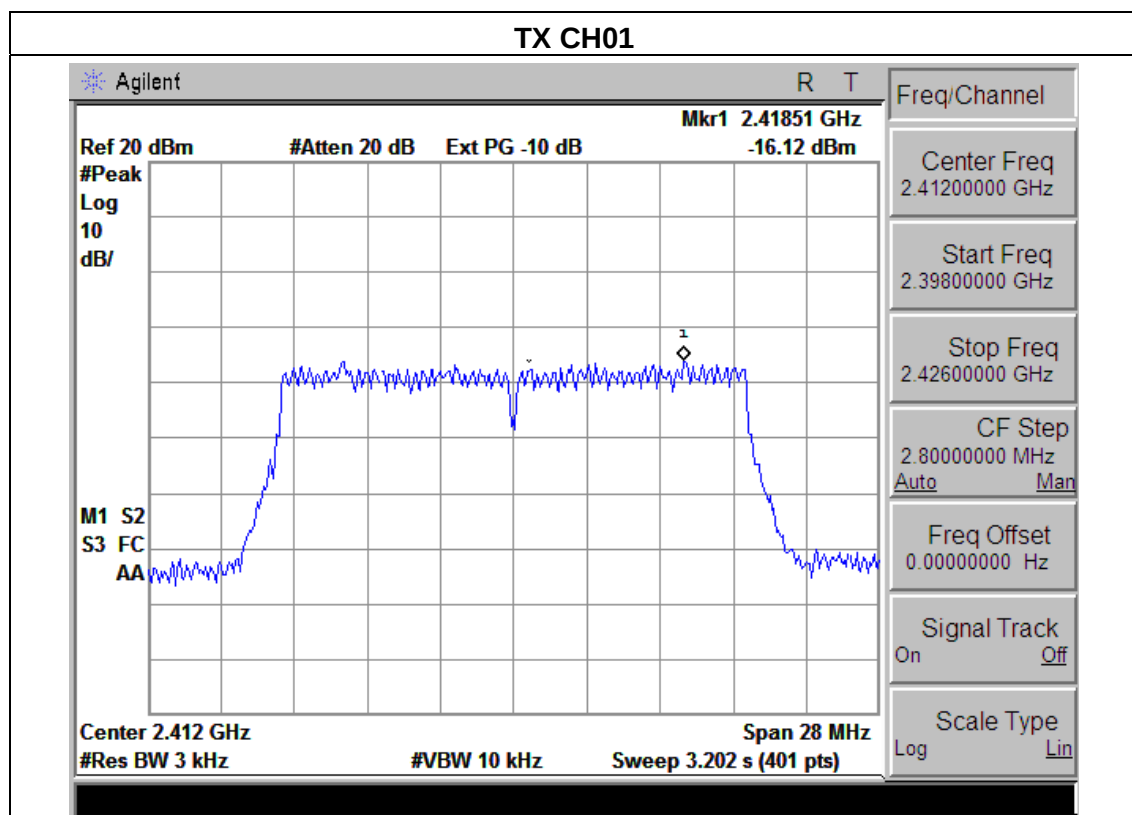


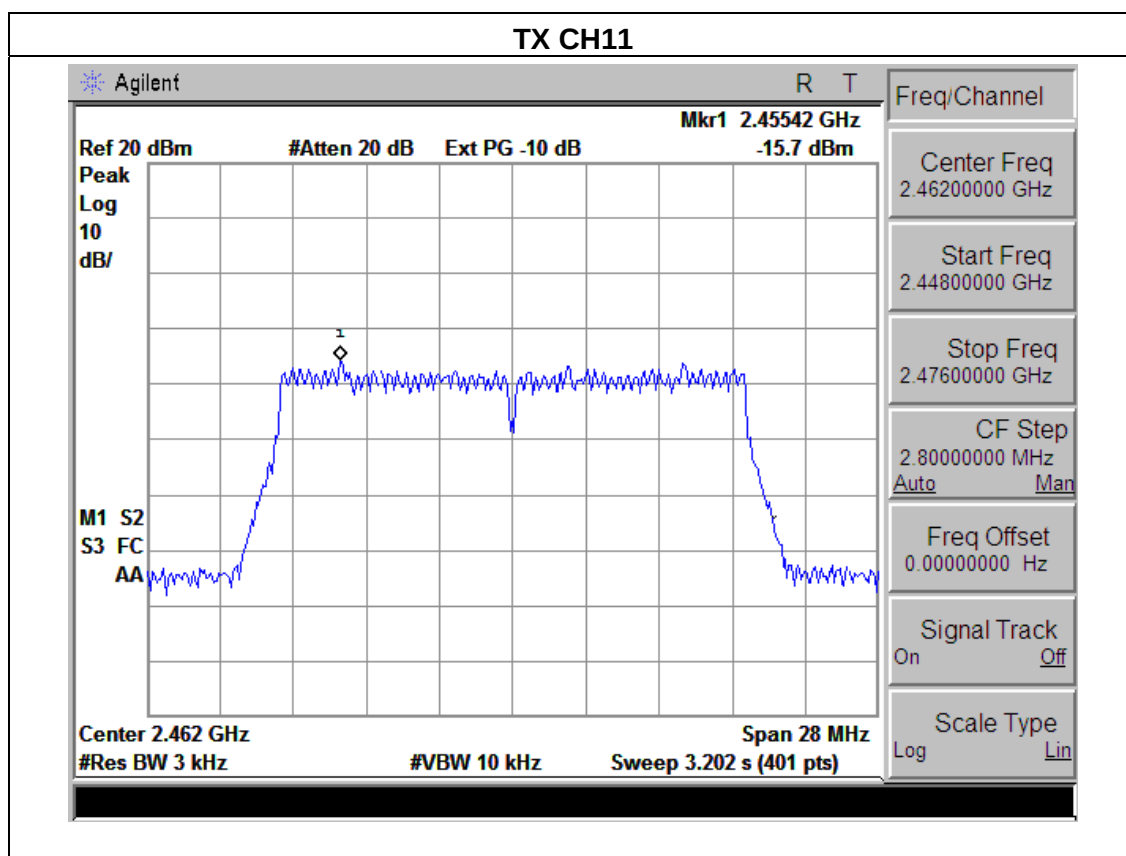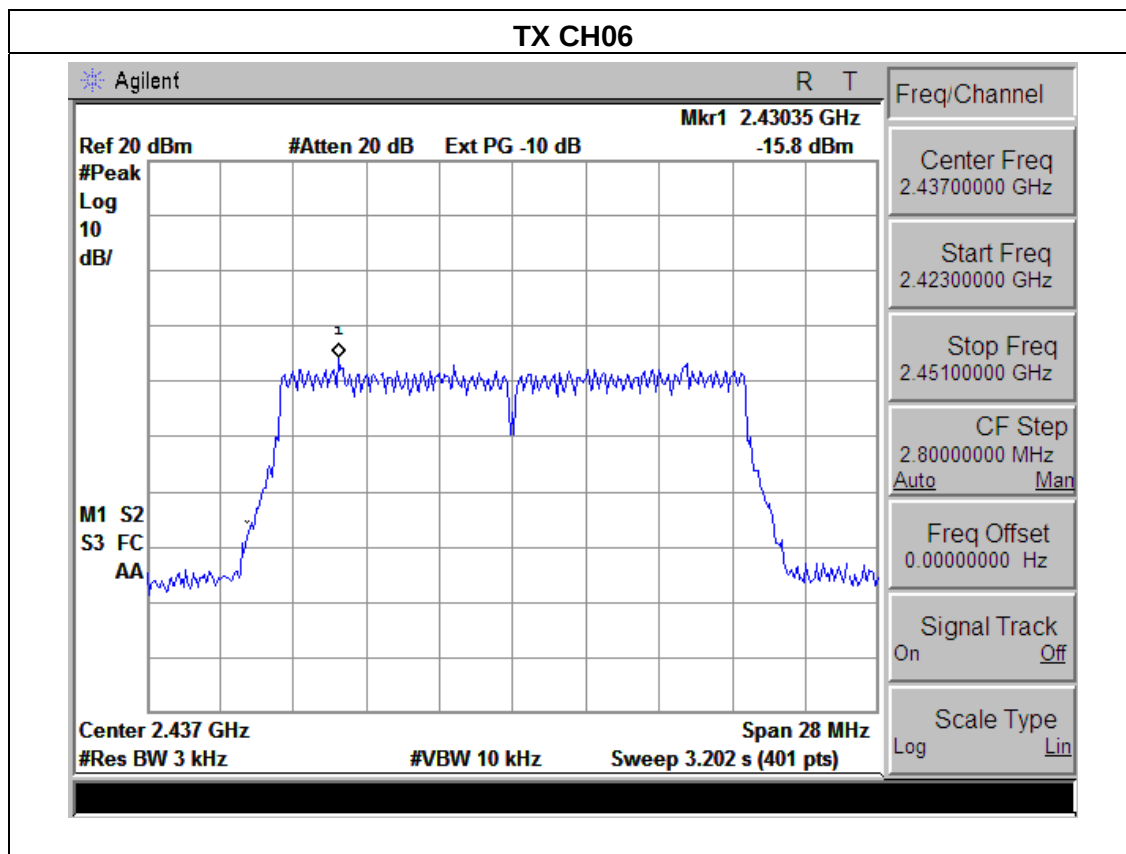

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-21.00	8	PASS
2437 MHz	-21.14	8	PASS
2452 MHz	-22.17	8	PASS

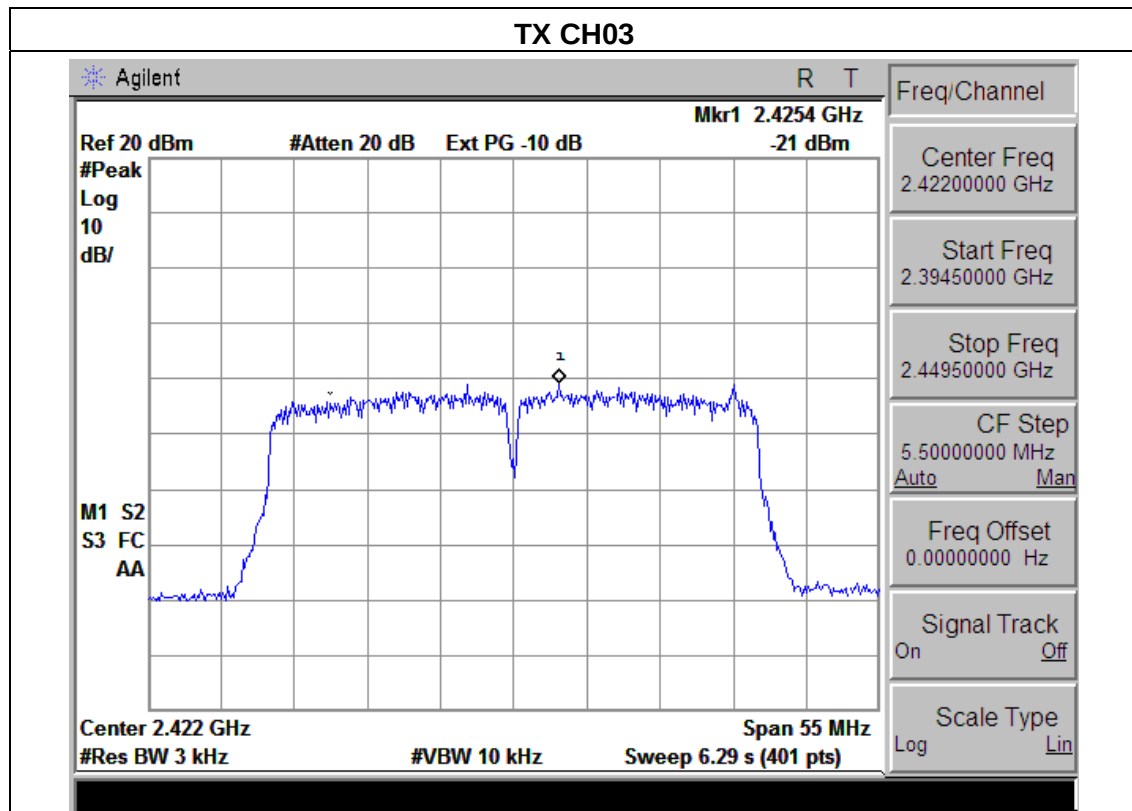

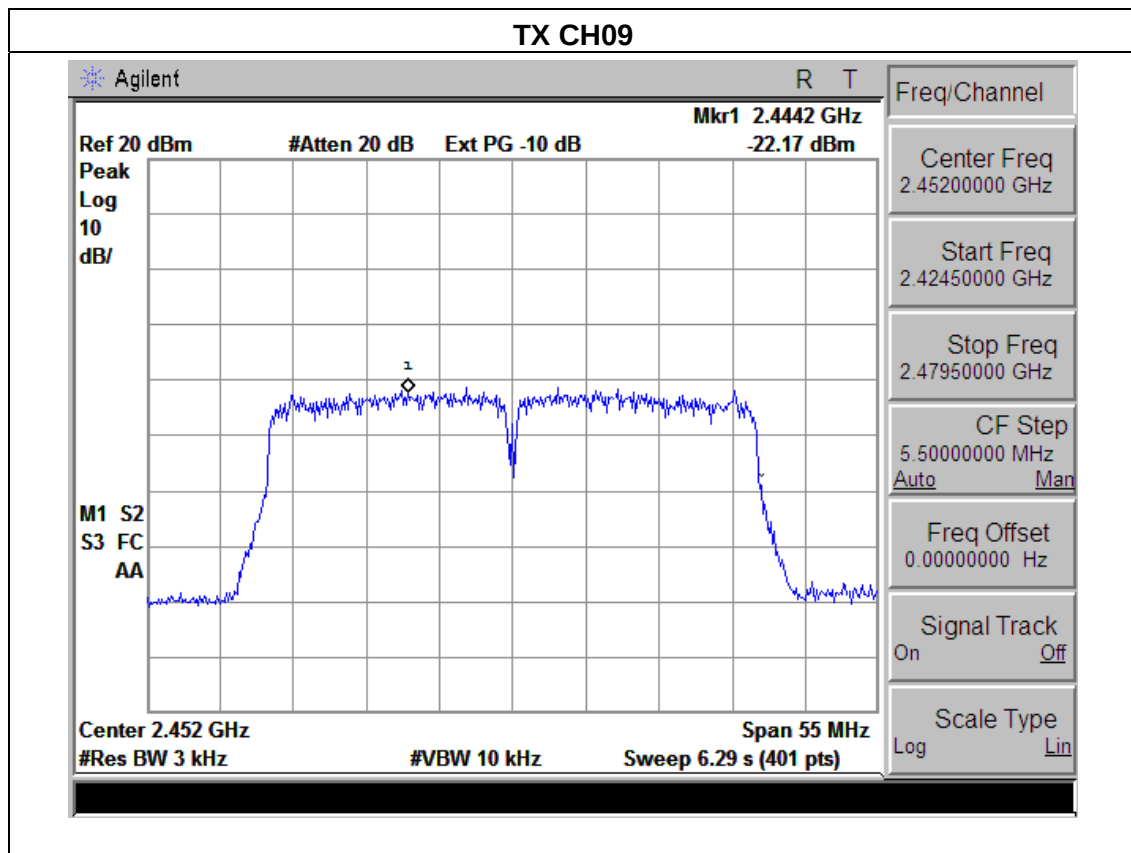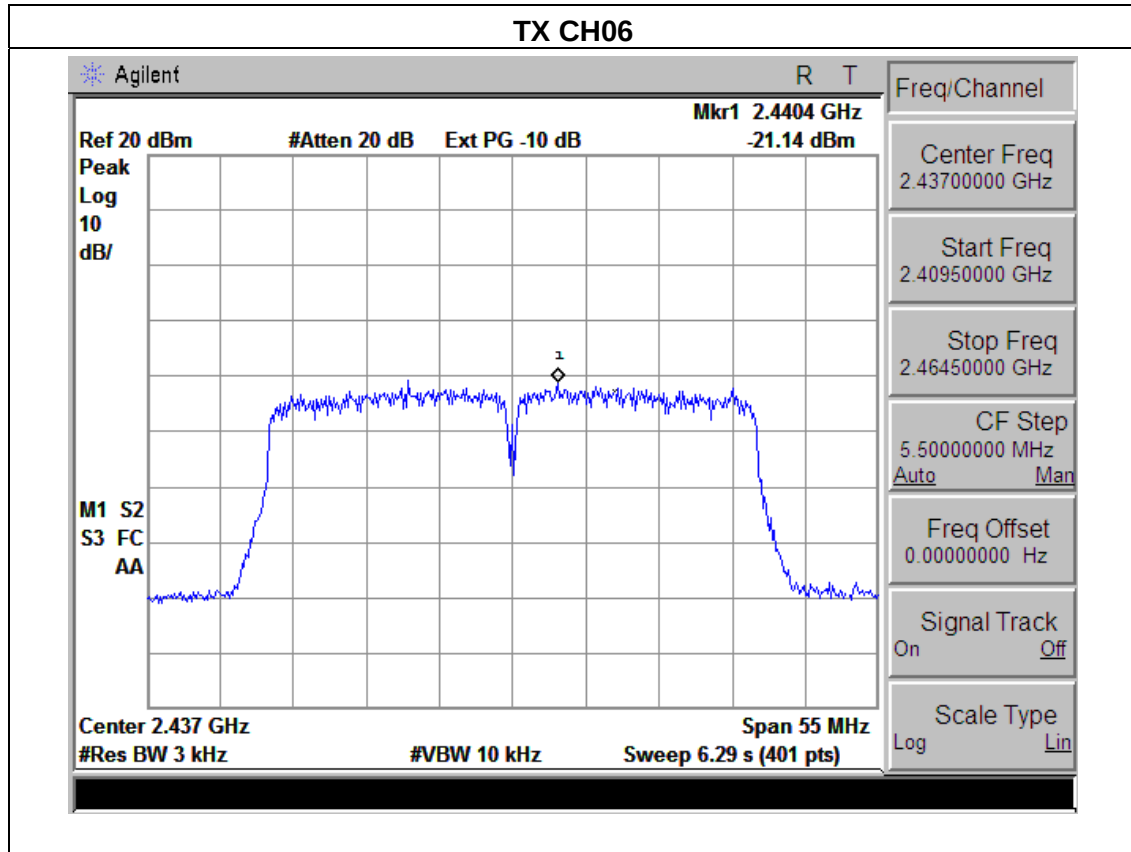

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

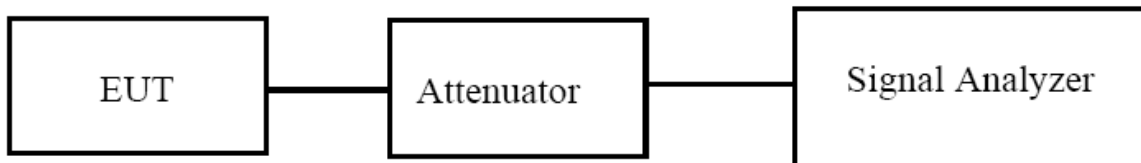


5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.3 TEST RESULTS

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.18	500	Pass
Middle	2437	9.07	500	Pass
High	2462	9.18	500	Pass

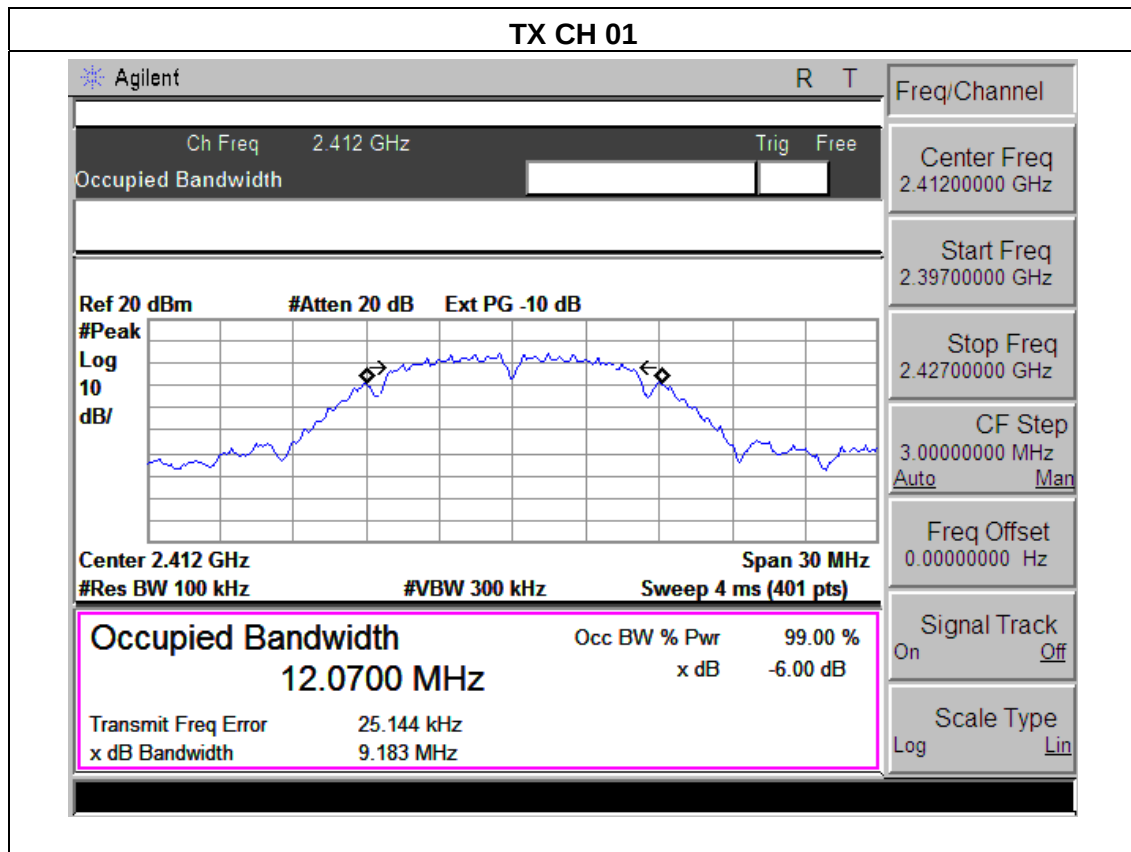

TX CH 06

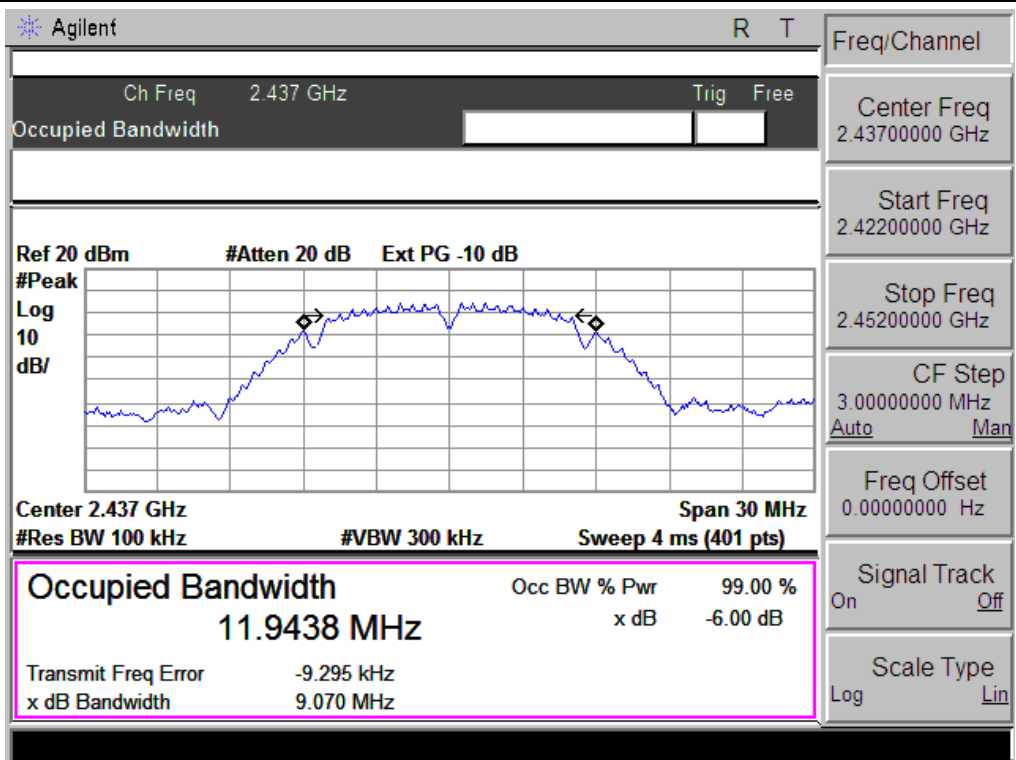


TX CH 11

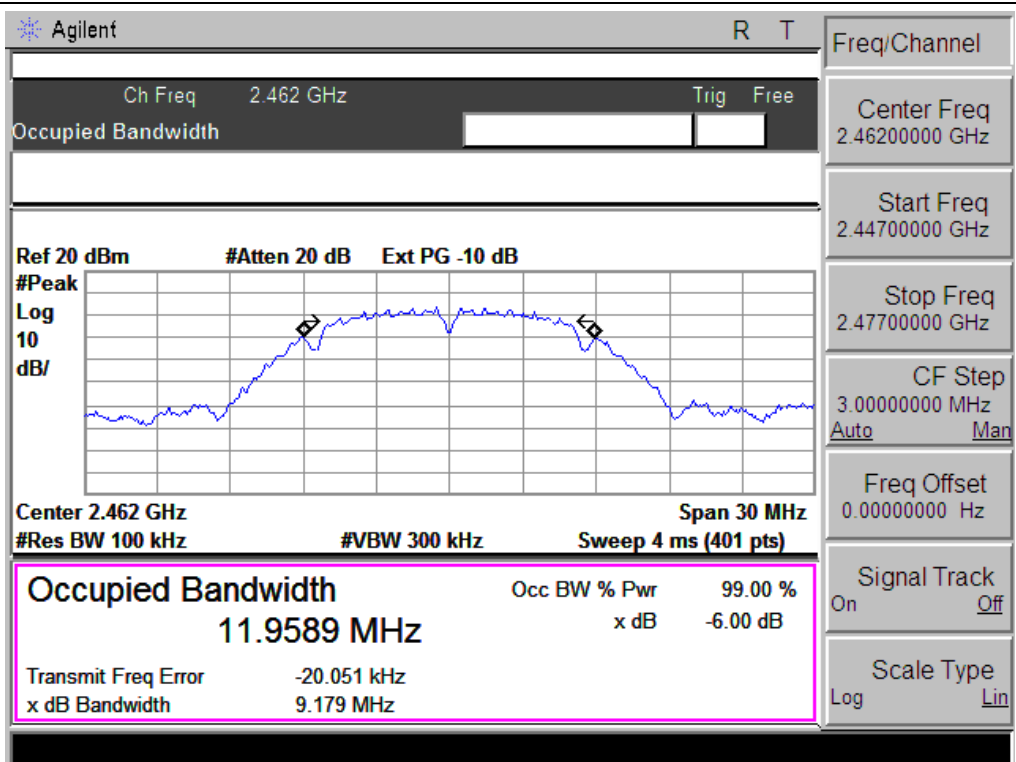


EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.58	500	Pass
Middle	2437	16.59	500	Pass
High	2462	16.63	500	Pass


TX CH 01

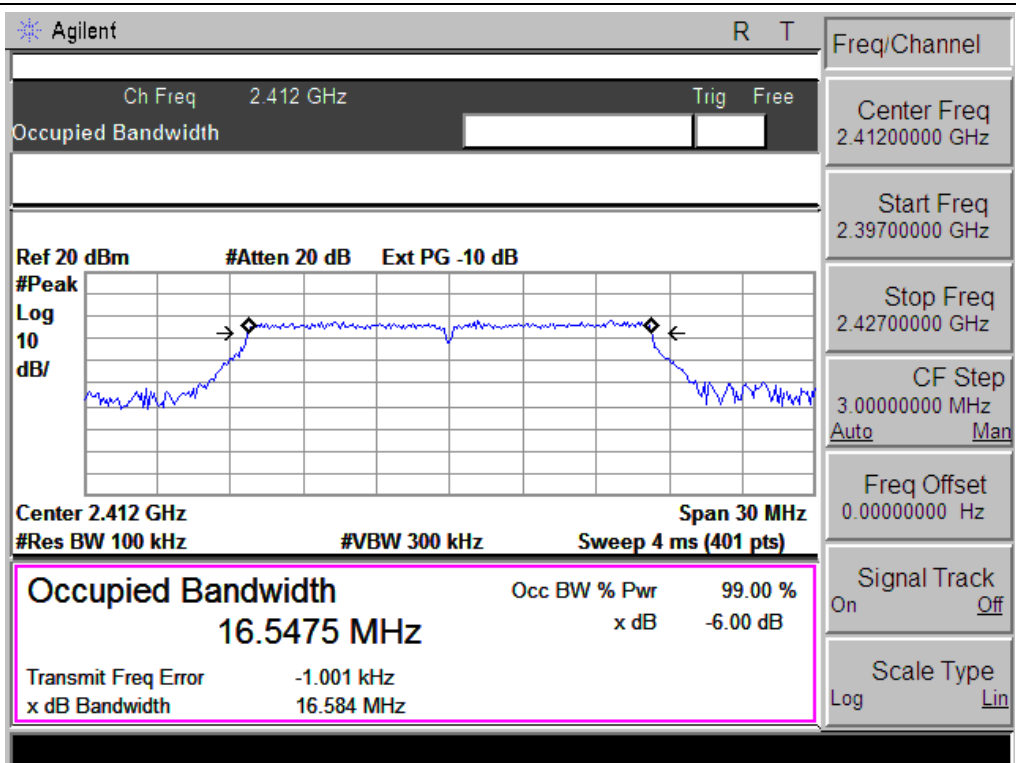

TX CH 06

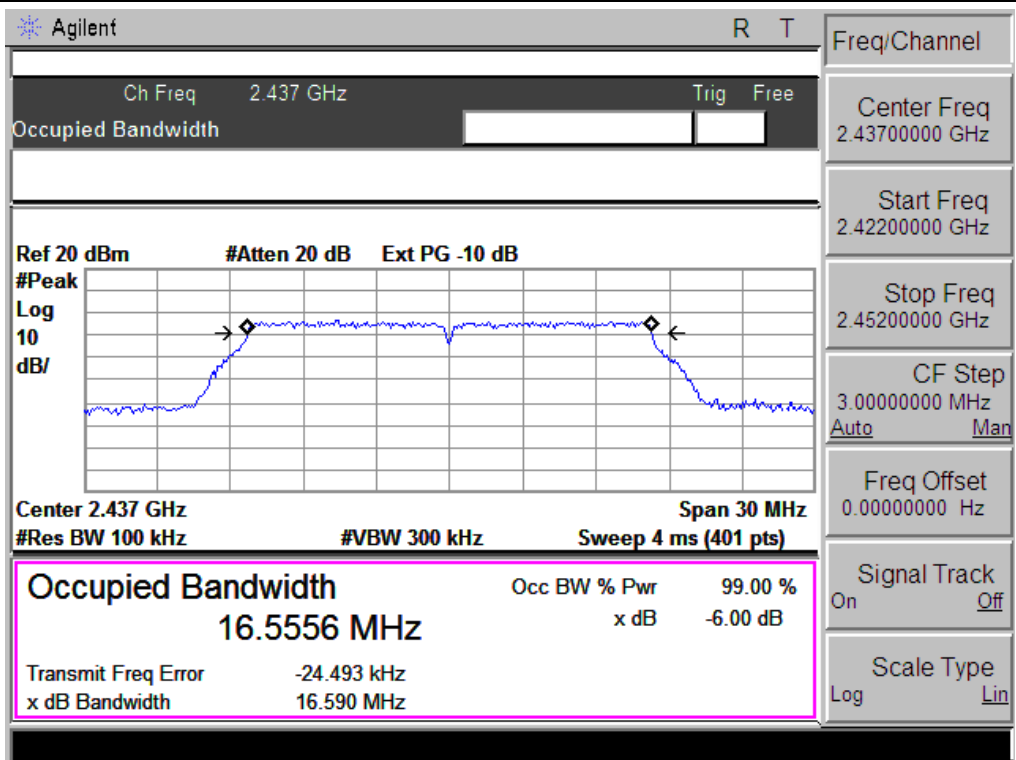


TX CH 11


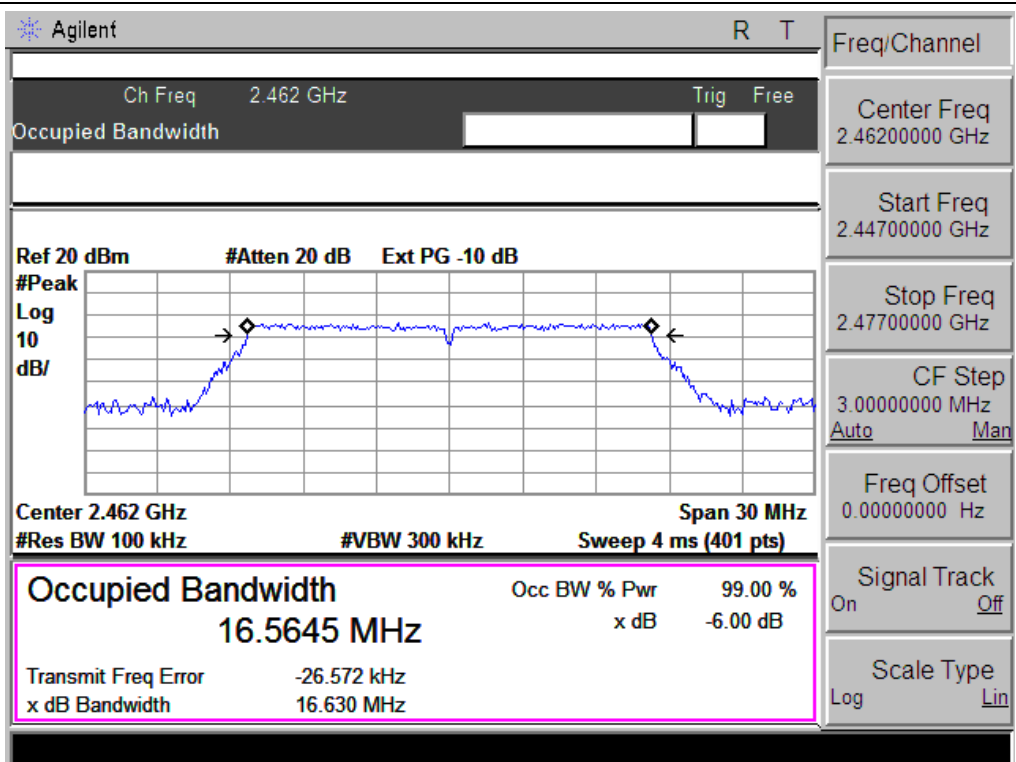


EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.81	500	Pass
Middle	2437	17.86	500	Pass
High	2462	17.88	500	Pass

TX CH 01

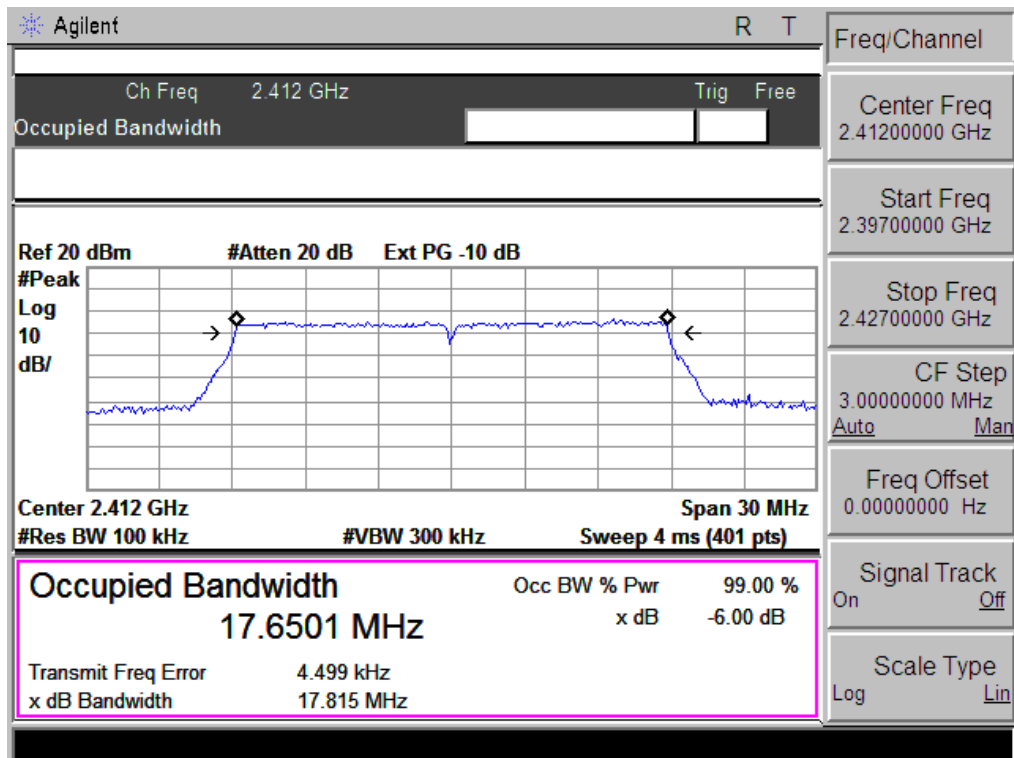


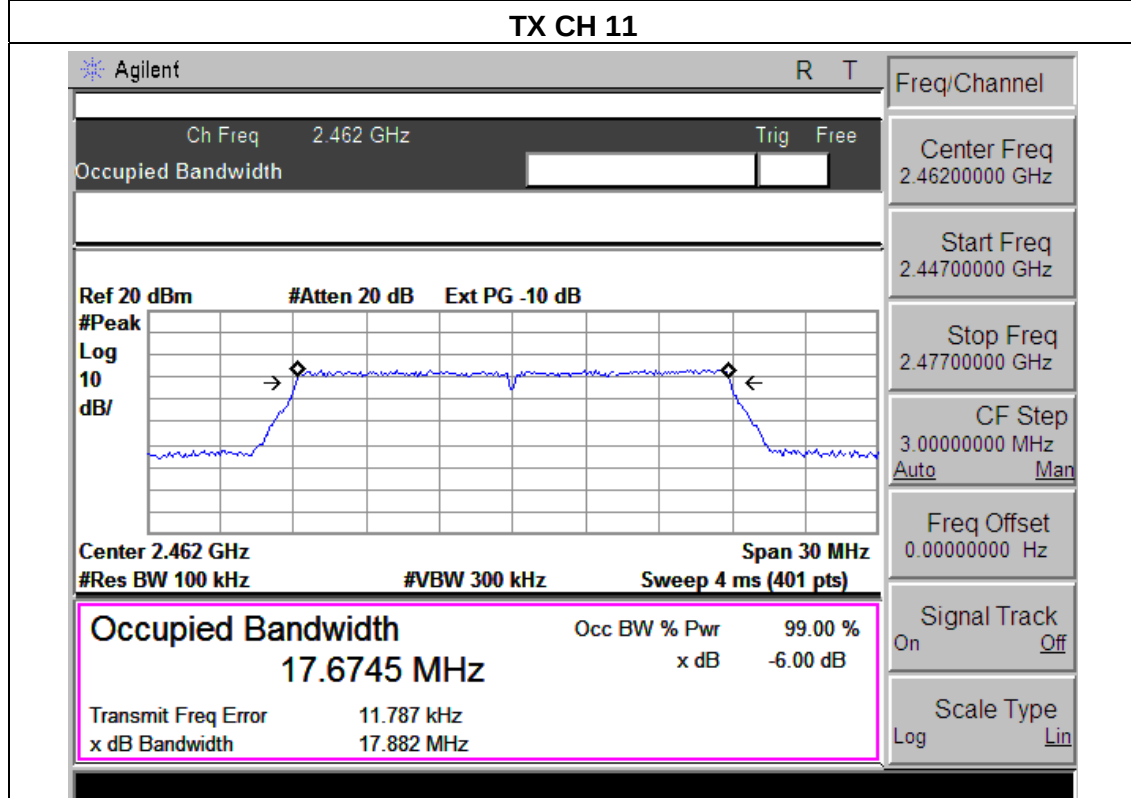
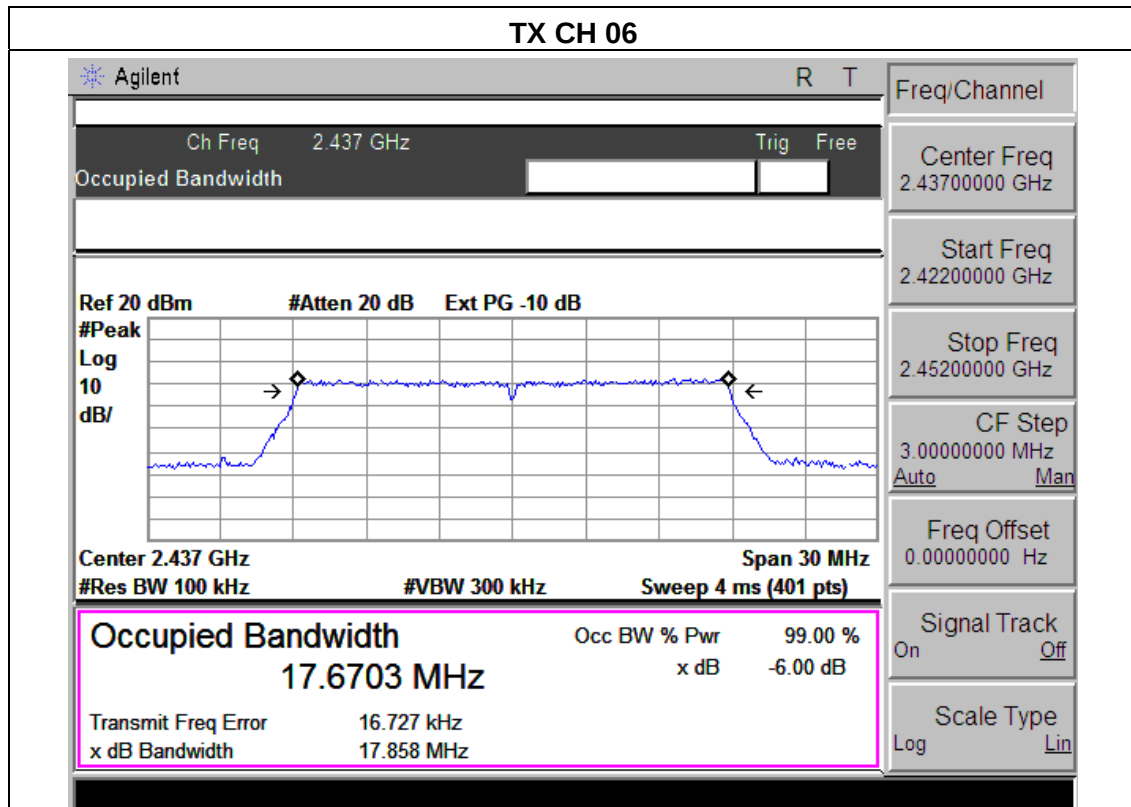


EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.21	500	Pass
Middle	2437	36.31	500	Pass
High	2452	36.28	500	Pass

TX CH 03

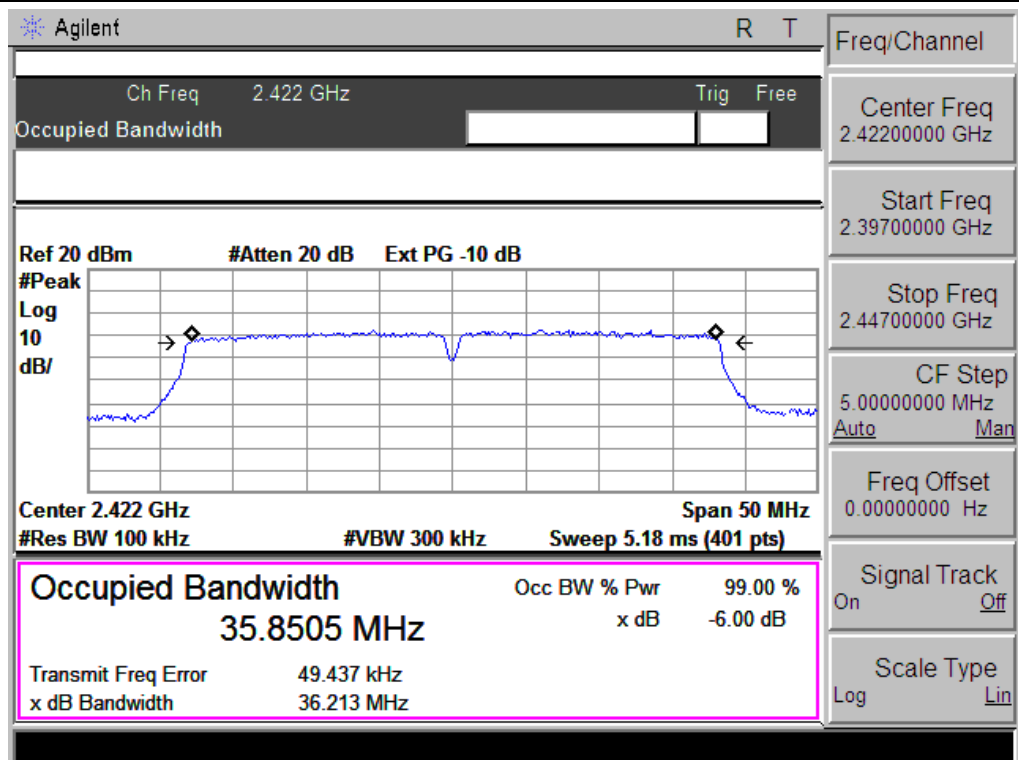

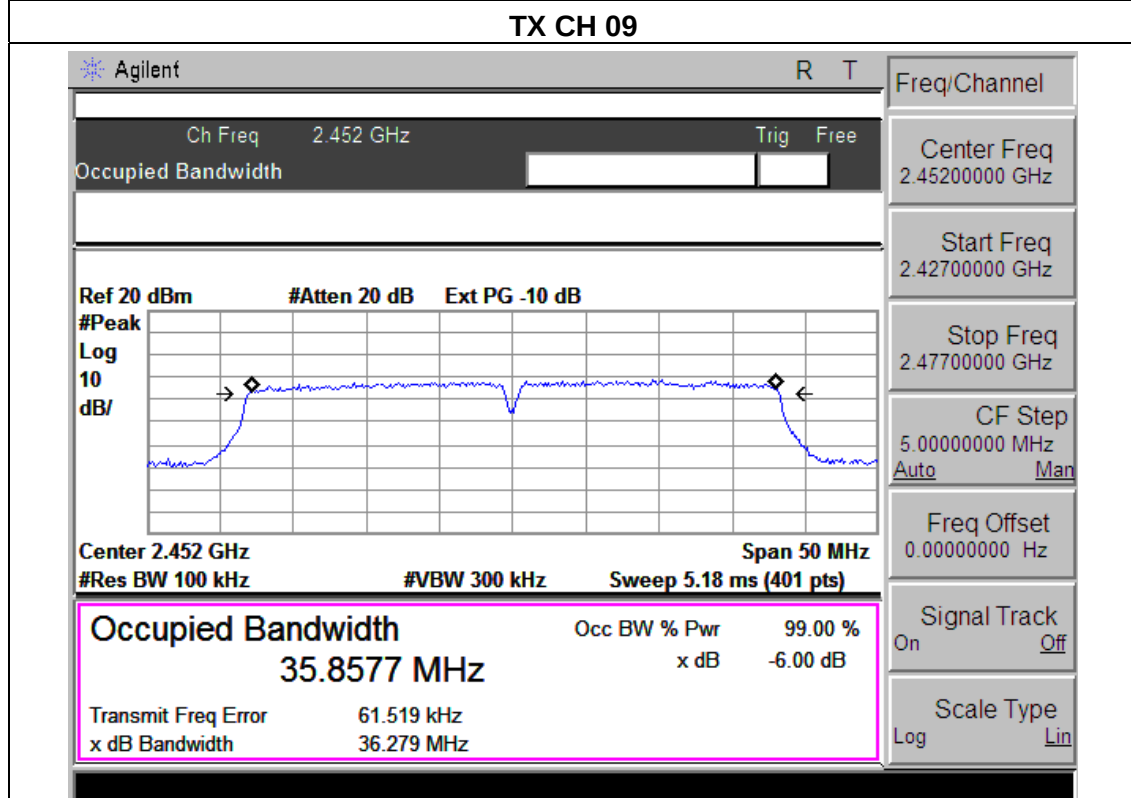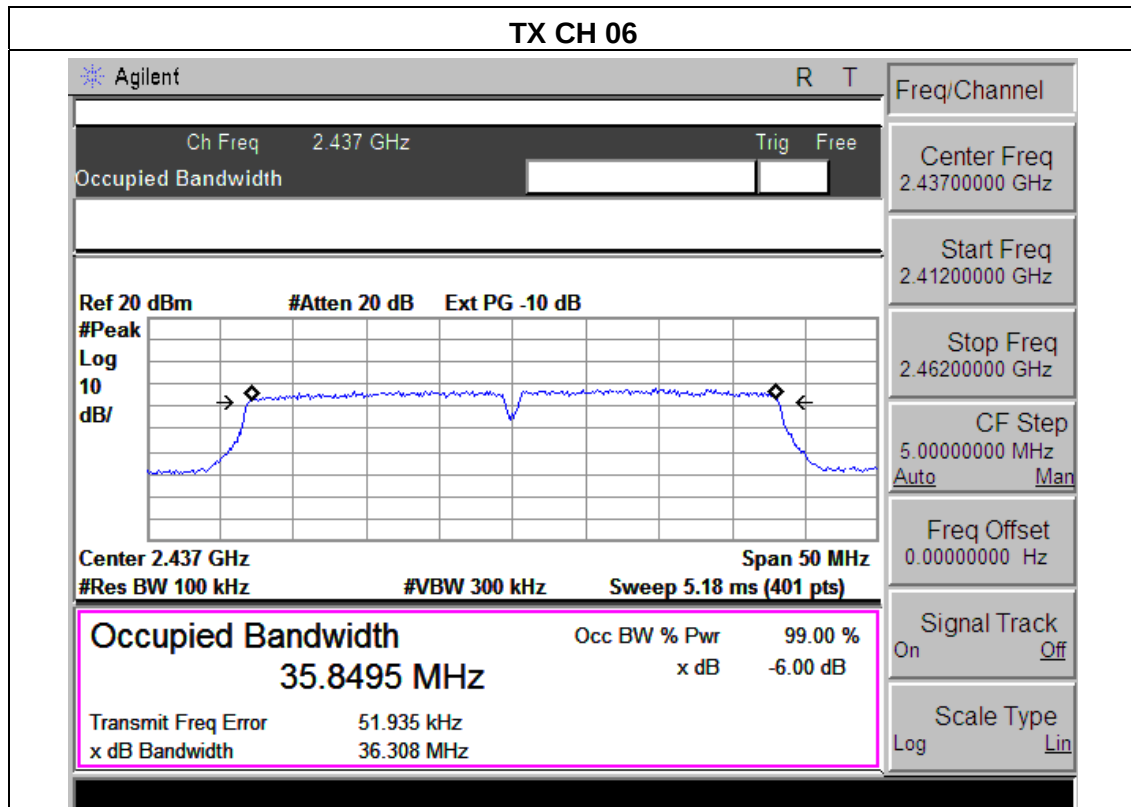

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g/n(20M, 40M) Mode /CH01, CH06, CH11		

TX 802.11b Mode

Test Channe	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	13.85	9.63	30
CH06	2437	13.44	9.46	30
CH11	2462	13.73	9.55	30

TX 802.11g Mode

CH01	2412	12.71	8.16	30
CH06	2437	12.86	8.34	30
CH11	2462	12.08	8.62	30

TX 802.11n(20) Mode

CH01	2412	10.32	7.57	30
CH06	2437	10.27	7.43	30
CH11	2462	10.41	7.66	30

TX 802.11n(40) Mode

CH03	2422	9.91	7.43	30
CH06	2437	9.82	7.36	30
CH09	2452	9.77	7.29	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

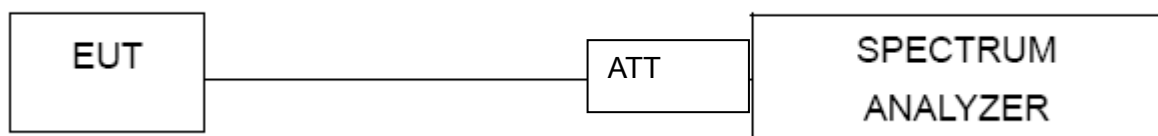

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	Portable 3G Wireless Router	Model Name :	JWA-2018R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	44.54	20	Pass
Right-band	47.78	20	Pass
802.11g mode			
Left-band	37.90	20	Pass
Right-band	40.21	20	Pass
802.11n-HT20 mode			
Left-band	34.75	20	Pass
Right-band	39.46	20	Pass
802.11n-HT40 mode			
Left-band	37.15	20	Pass
Right-band	36.47	20	Pass


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	47.64	-13.06	34.58	74	-39.42	peak	Vertical
2390	46.75	-13.06	33.69	74	-40.31	peak	Horizontal
2483.5	47.69	-12.78	34.91	74	-39.09	peak	Vertical
2483.5	46.42	-12.78	33.64	74	-40.36	peak	Horizontal
802.11g							
2390	43.45	-13.06	30.39	74	-43.61	peak	Vertical
2390	45.37	-13.06	32.31	74	-41.69	peak	Horizontal
2483.5	47.06	-12.78	34.28	74	-39.72	peak	Vertical
2483.5	43.55	-12.78	30.77	74	-43.23	peak	Horizontal
802.11n (20)							
2390	39.79	-13.06	26.73	74	-47.27	peak	Vertical
2390	38.57	-13.06	25.51	74	-48.49	peak	Horizontal
2483.5	47.46	-12.78	34.68	74	-39.32	peak	Vertical
2483.5	47.19	-12.78	34.41	74	-39.59	peak	Horizontal
802.11n (40)							
2390	39.45	-13.06	26.39	74	-47.61	peak	Vertical
2390	38.23	-13.06	25.17	74	-48.83	peak	Horizontal
2483.5	46.75	-12.78	33.97	74	-40.03	peak	Vertical
2483.5	45.86	-12.78	33.08	74	-40.92	peak	Horizontal

Note: The result(PK) less than AV limite,No need shown AV result.


802.11b: Band Edge, Left Side

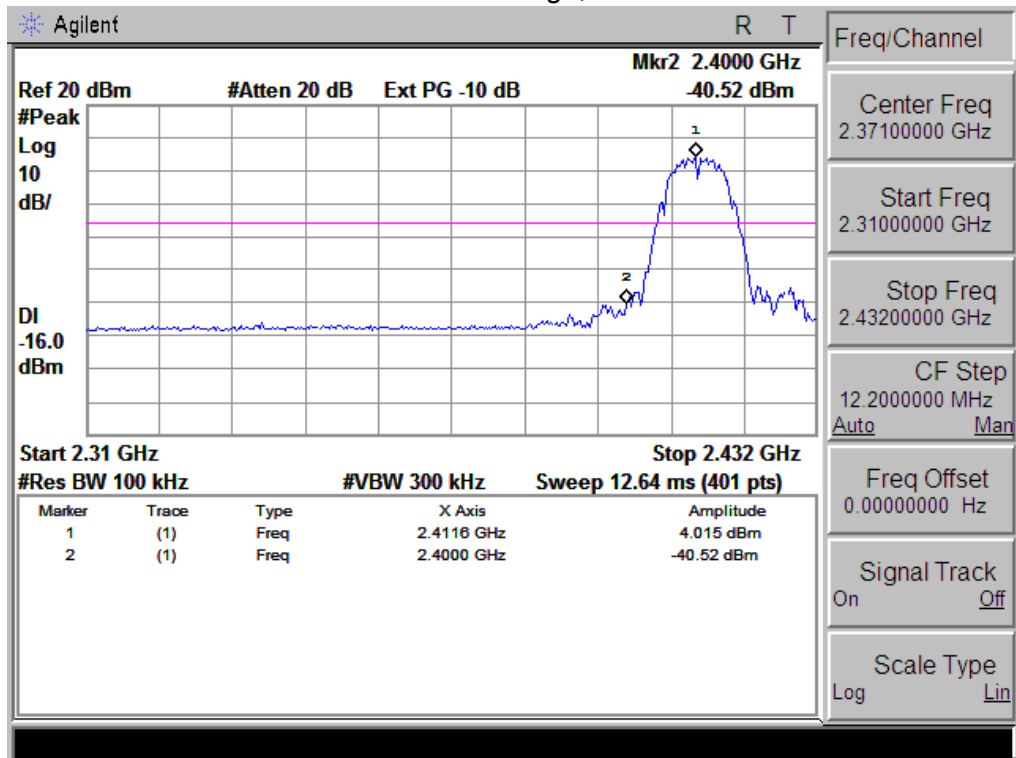


802.11b: Band Edge, Right Side

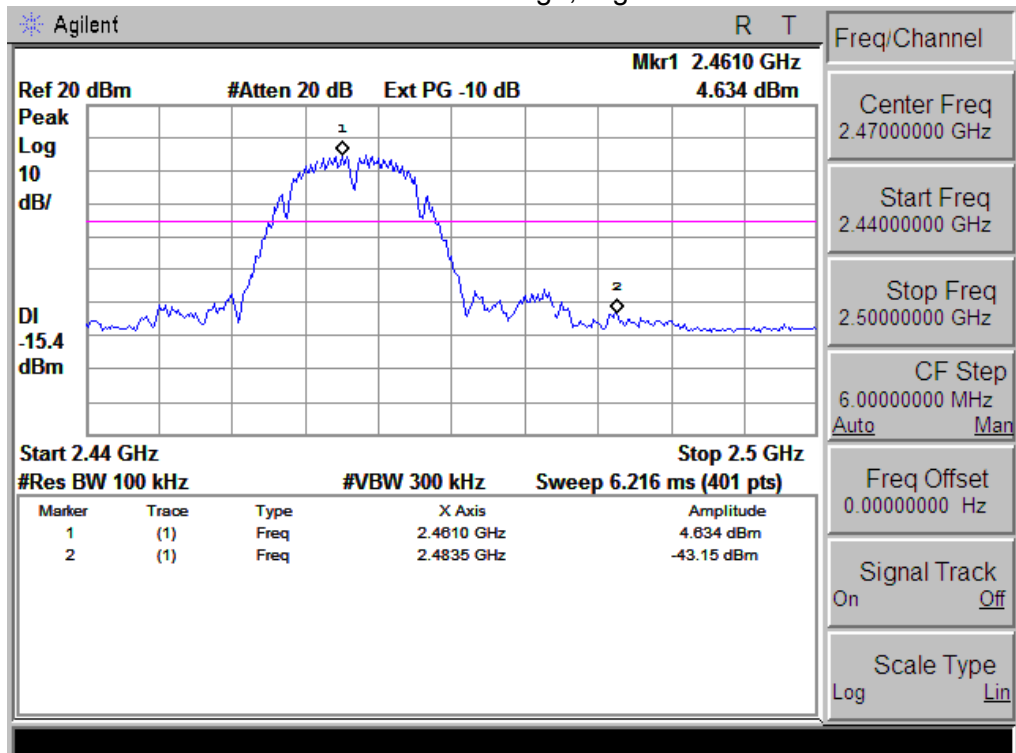


802.11g: Band Edge, Left Side

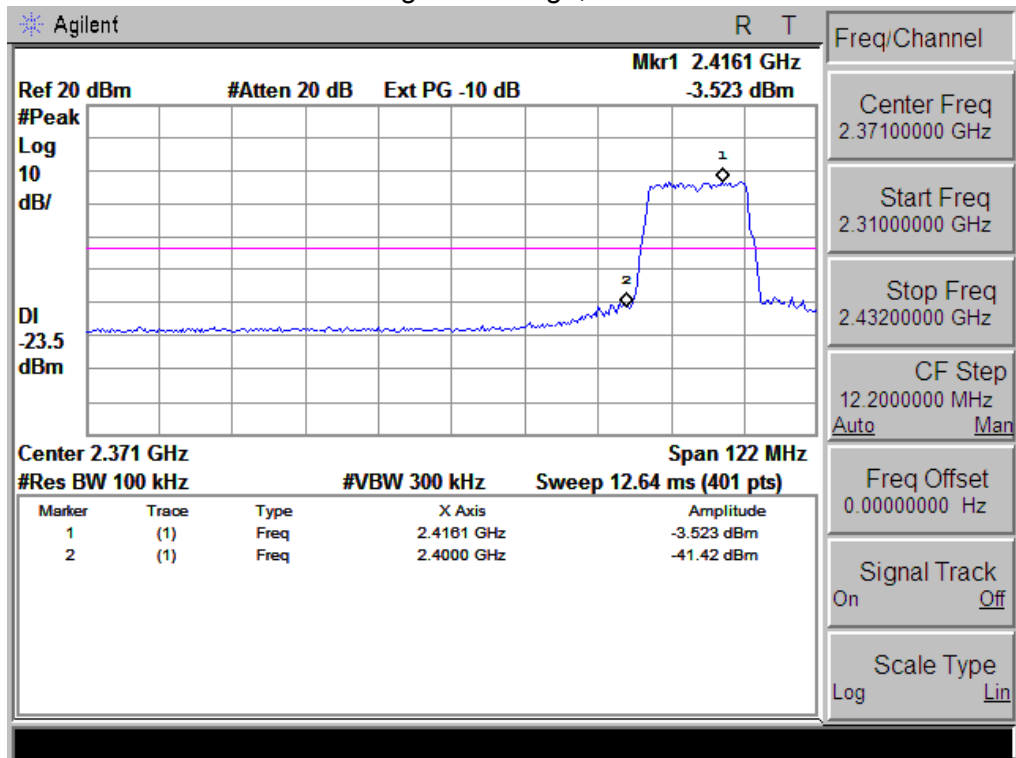


802.11g: Band Edge, Right Side

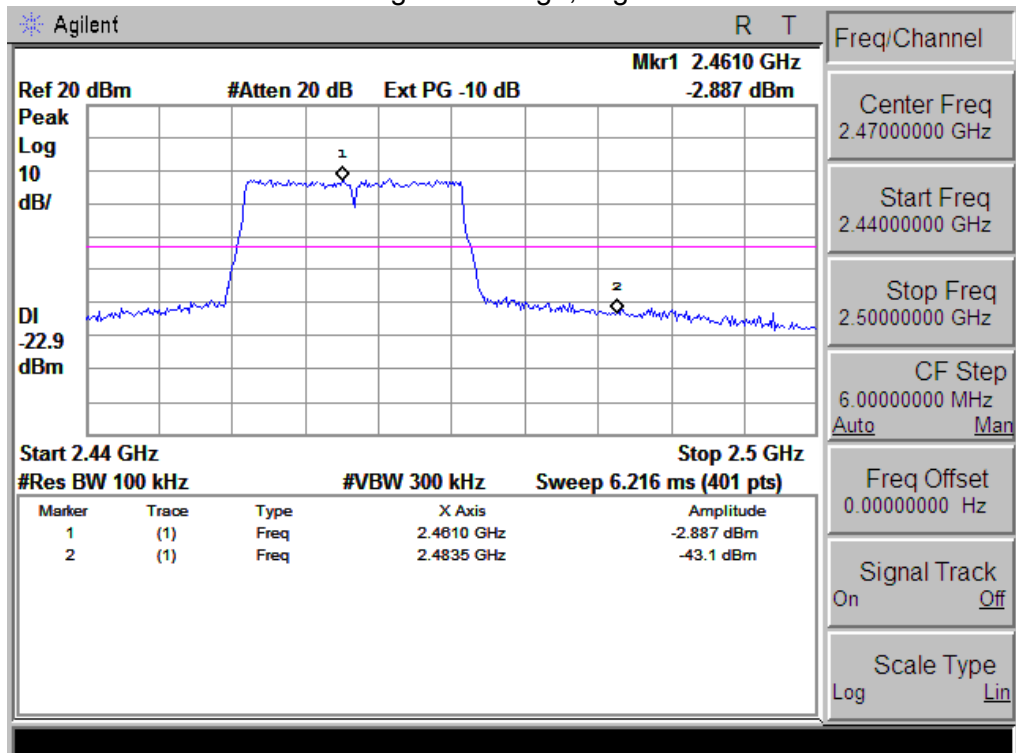


802.11n-HT20: Band Edge, Left Side

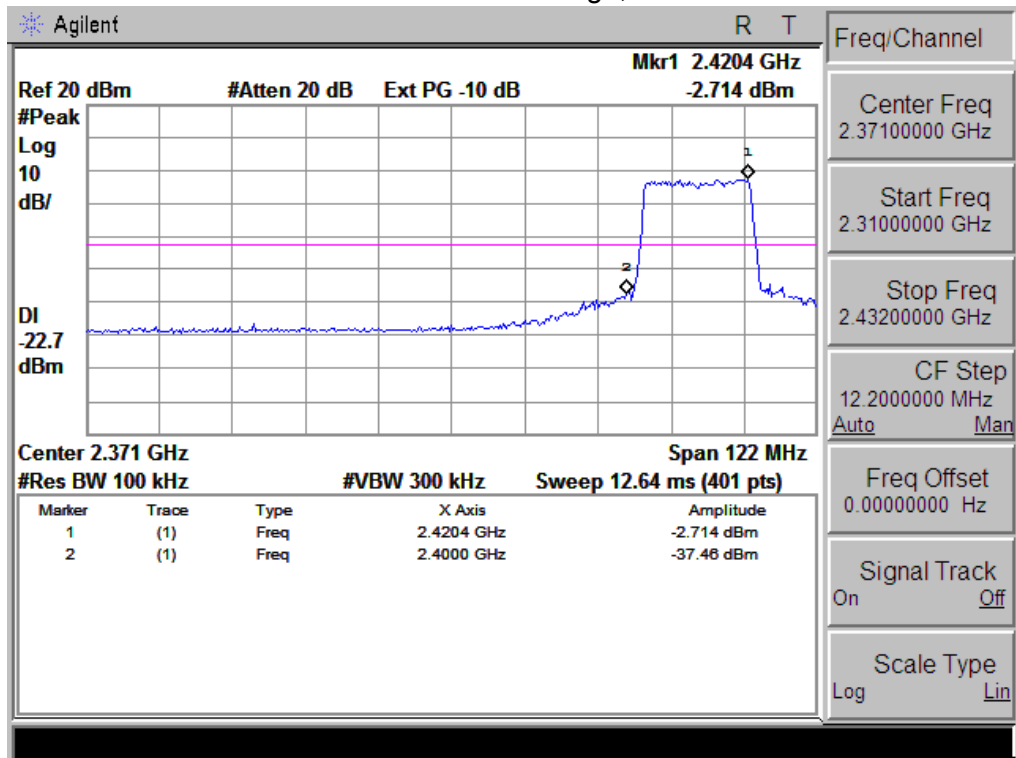


802.11n-HT20: Band Edge, Right Side

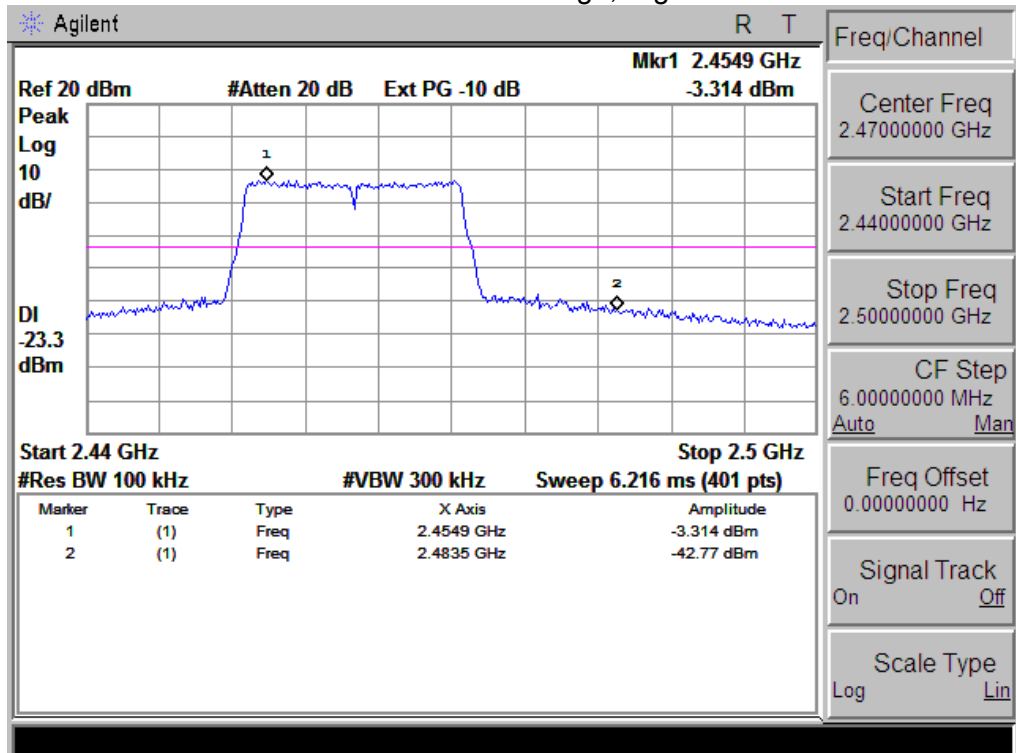

802.11n-HT40: Band Edge, Left Side

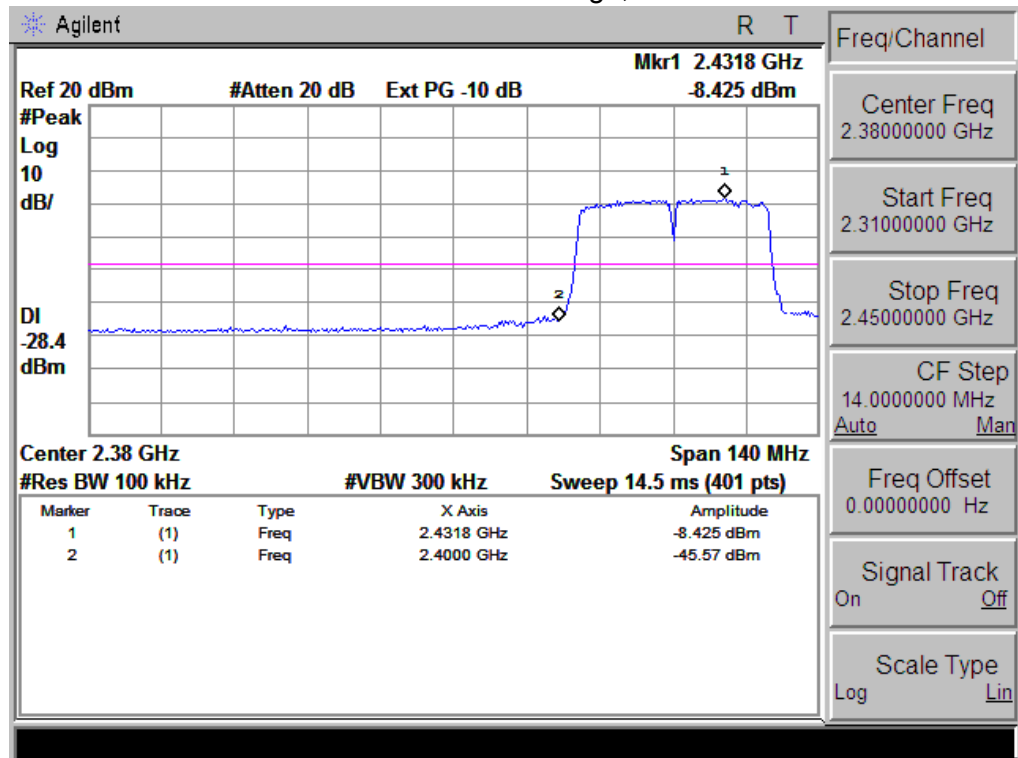

802.11n-HT40: Band Edge, Right Side

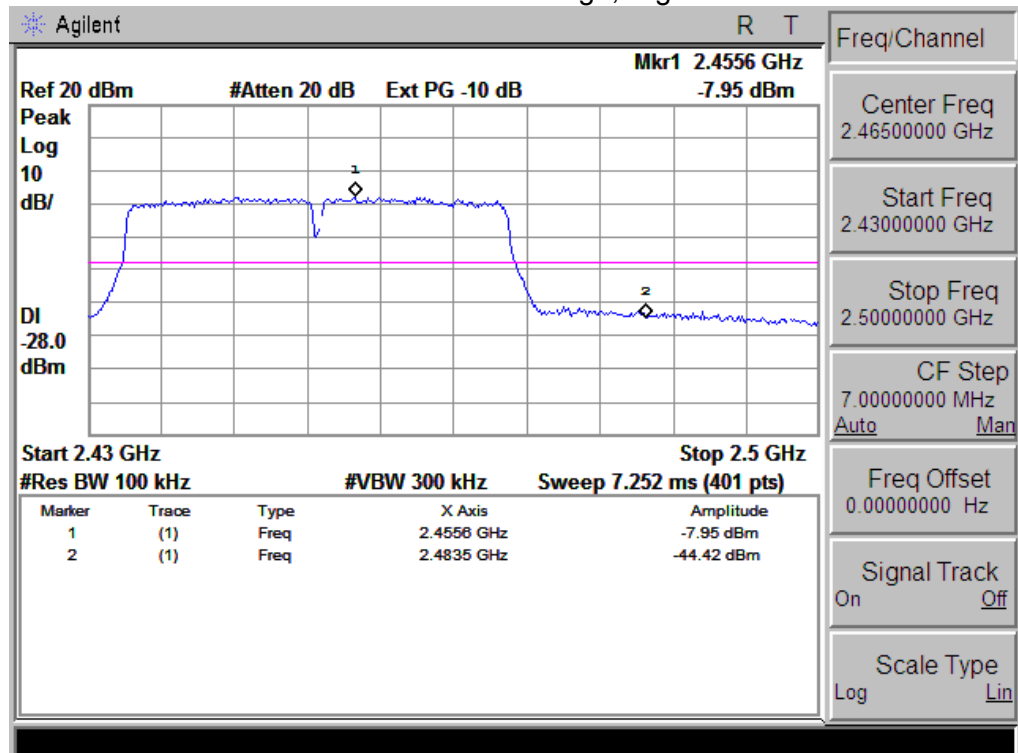

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



8.2 EUT ANTENNA

The EUT antenna is Build-in antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

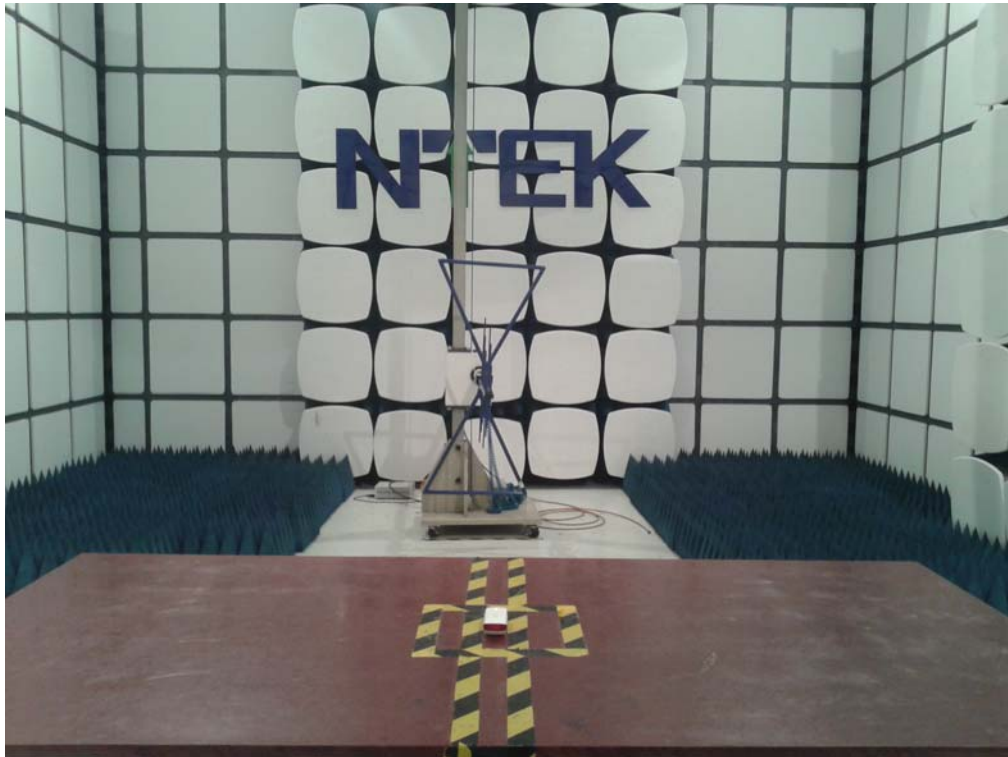

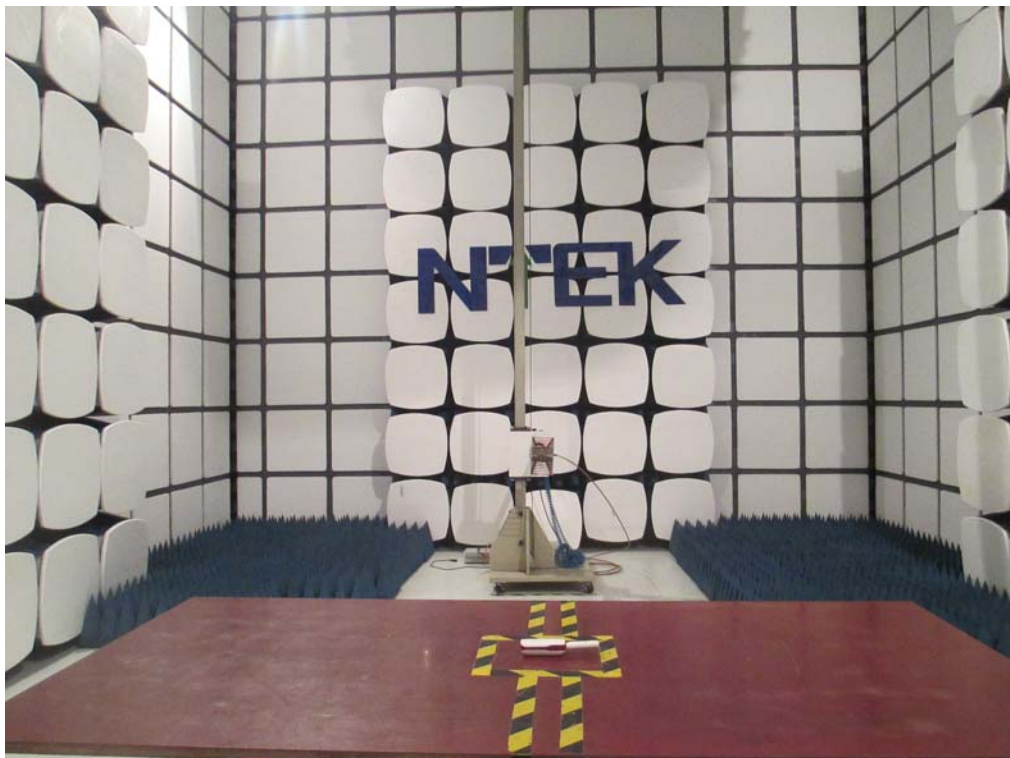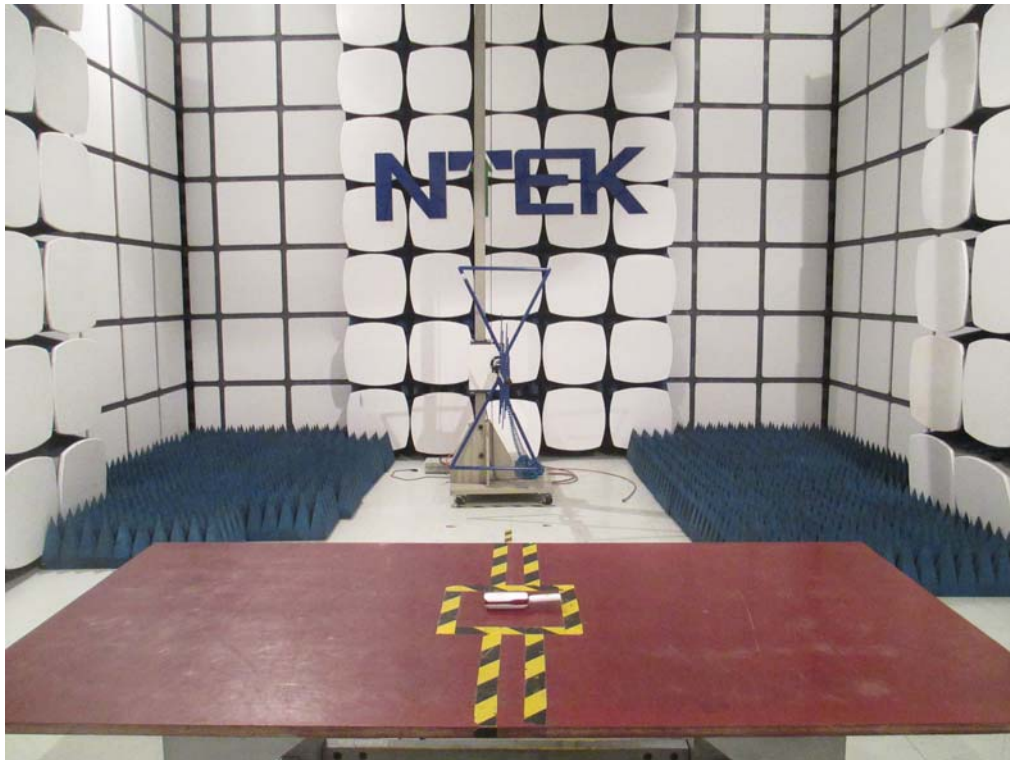

Conducted Measurement Photo

