


EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH100	Test Voltage	AC 120V/60Hz

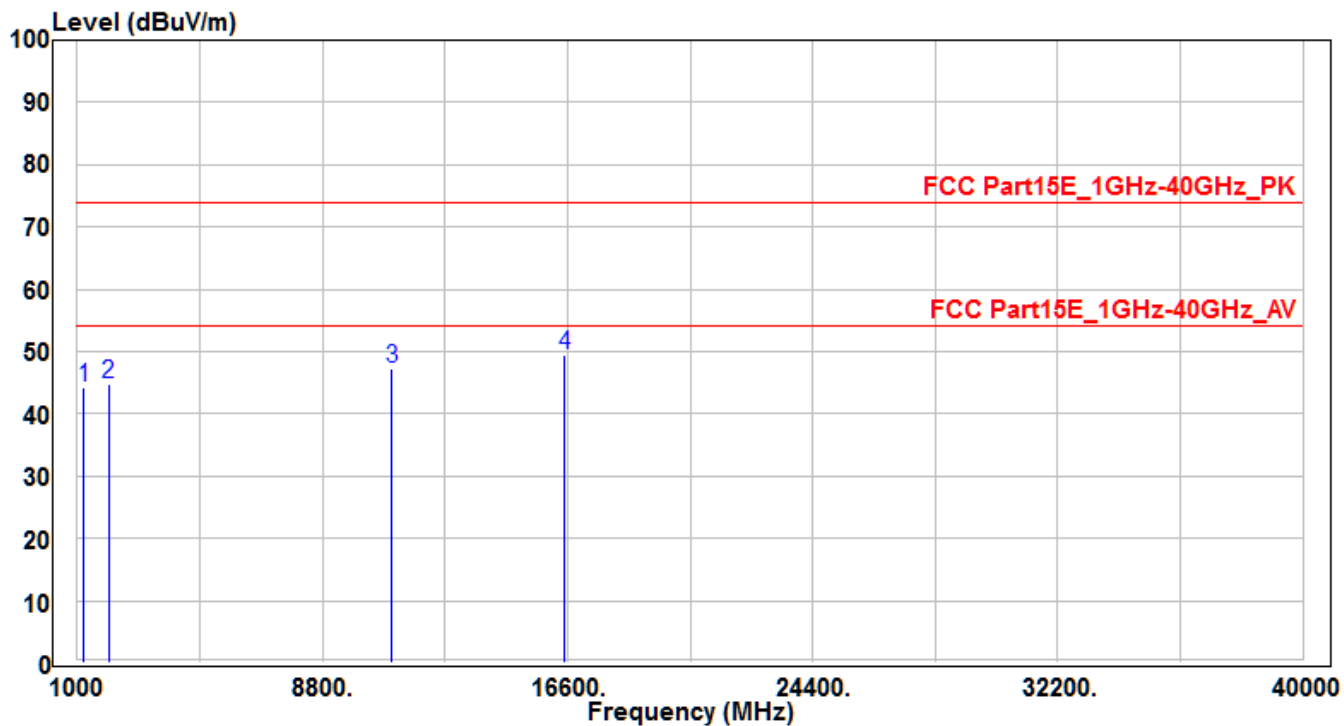


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1197.73	51.26	-7.07	44.19	-29.81	74	150	400	Peak
2		1995.52	49.48	-4.64	44.84	-29.16	74	150	400	Peak
3		11000	28.67	18.58	47.25	-26.75	74	150	400	Peak
4	*	16500	28.71	20.76	49.47	-24.53	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH116	Test Voltage	AC 120V/60Hz

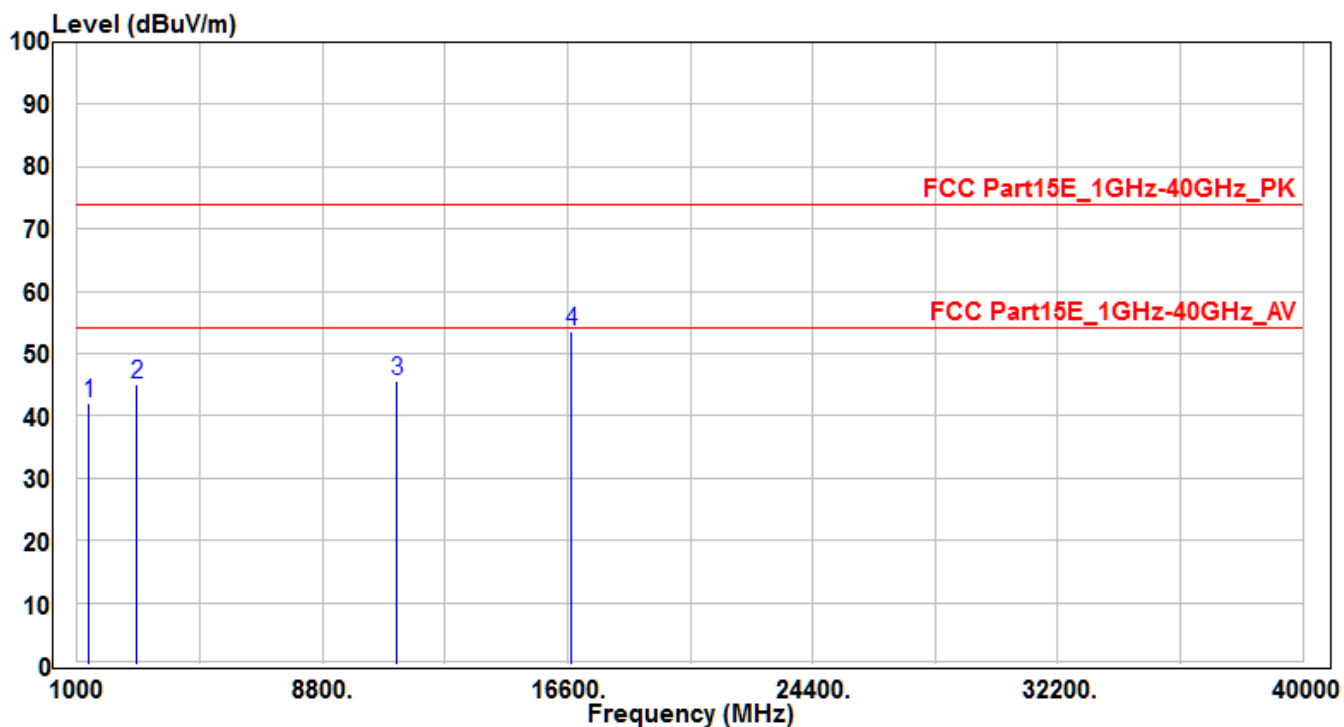


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1369.98	48.69	-6.65	42.04	-31.96	74	150	400	Peak
2	2896.554	47.72	-2.74	44.98	-29.02	74	150	400	Peak
3	11160	27.2	18.51	45.71	-28.29	74	150	400	Peak
4	* 16740	30.73	22.94	53.67	-20.33	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
4. The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH116	Test Voltage	AC 120V/60Hz

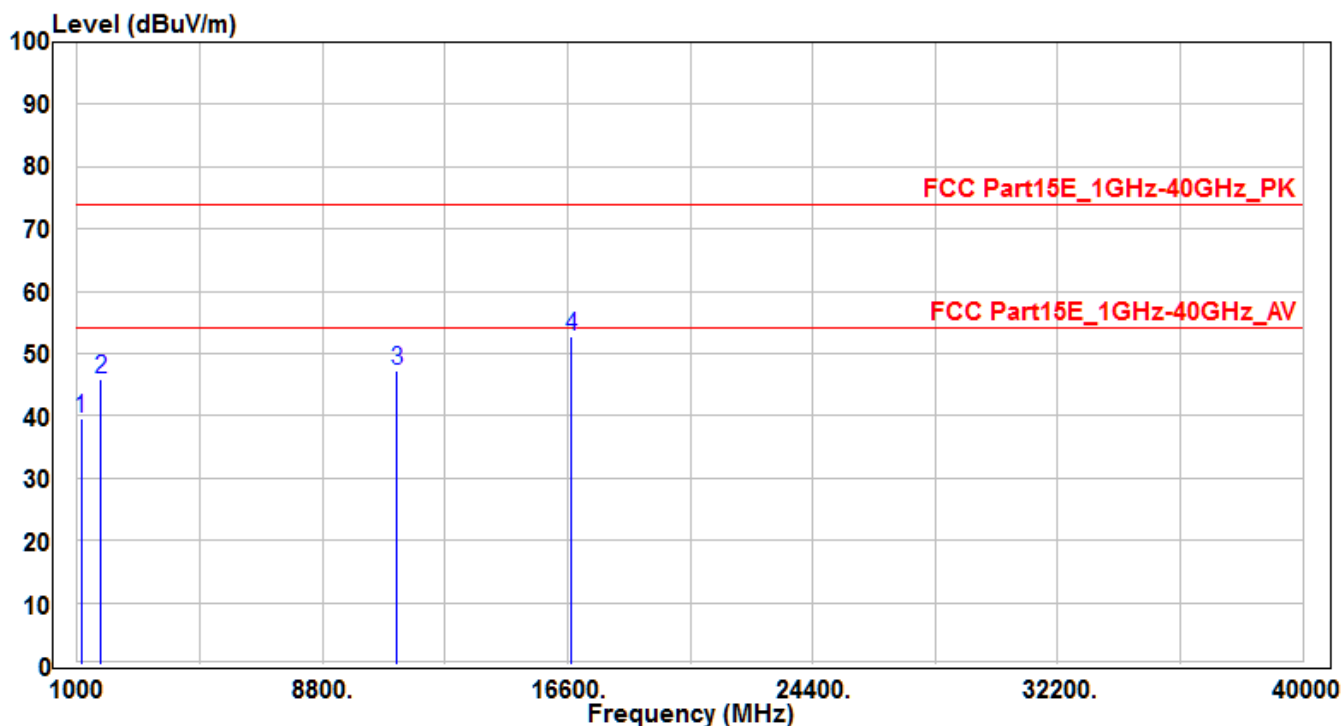


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1123.2	46.89	-7.25	39.64	-34.36	74	150	400	Peak
2		1745.89	51.36	-5.49	45.87	-28.13	74	150	400	Peak
3		11160	28.68	18.51	47.19	-26.81	74	150	400	Peak
4	*	16740	29.93	22.94	52.87	-21.13	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH120	Test Voltage	AC 120V/60Hz

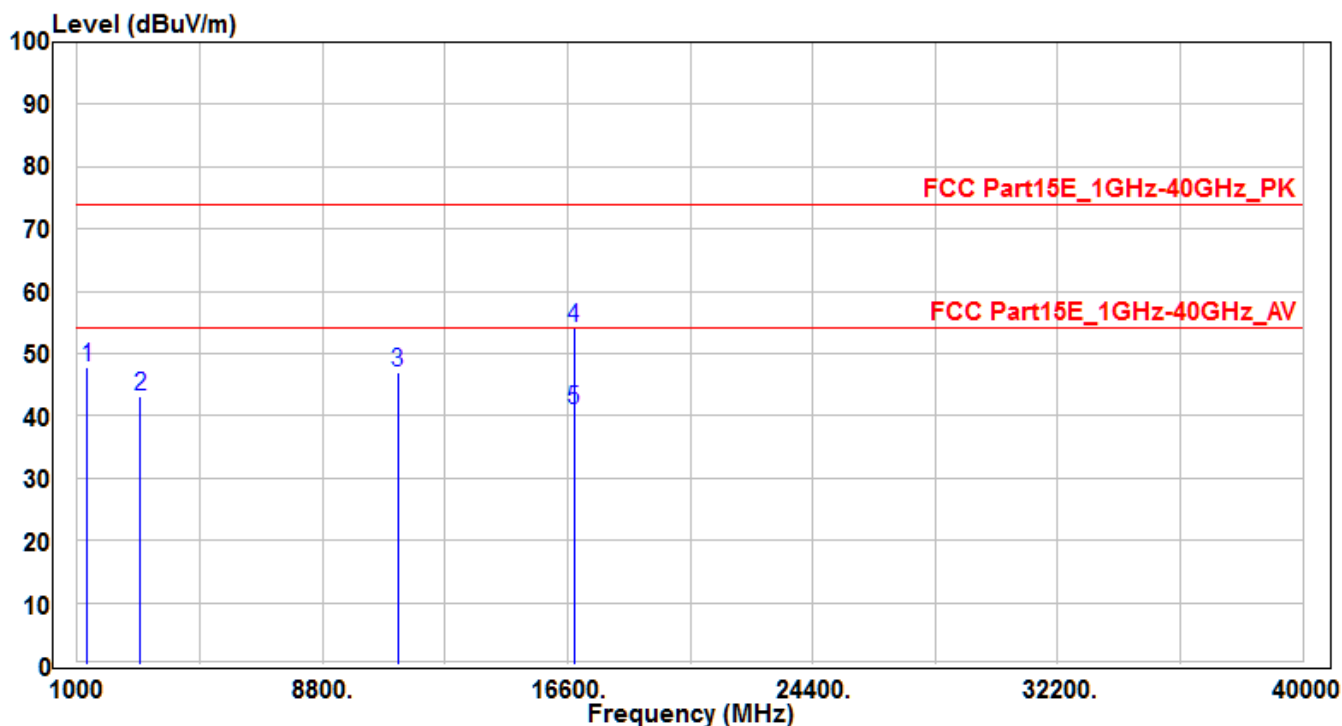


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1320.52	54.5	-6.77	47.73	-26.27	74	150	400	Peak
2		2996.6	46	-2.92	43.08	-30.92	74	150	400	Peak
3		11200	28.46	18.49	46.95	-27.05	74	150	400	Peak
4	*	16800	30.71	23.49	54.2	-19.8	74	180	255	Peak
5	*	16800	17.54	23.49	41.03	-12.97	54	180	255	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
4. The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH120	Test Voltage	AC 120V/60Hz

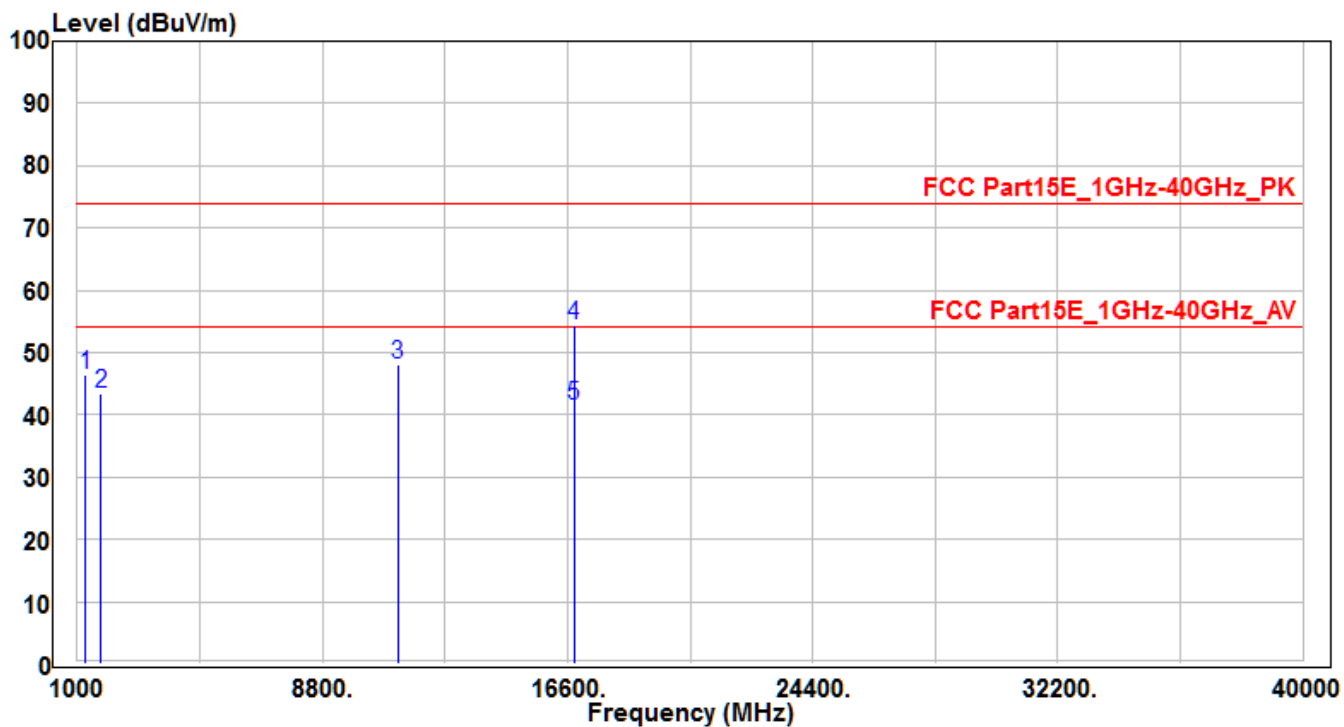


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1258.9	53.3	-6.92	46.38	-27.62	74	150	400	Peak
2	1754.5	48.75	-5.46	43.29	-30.71	74	150	400	Peak
3	11200	29.52	18.49	48.01	-25.99	74	150	400	Peak
4	* 16800	30.9	23.49	54.39	-19.61	74	175	200	Peak
5	* 16800	18	23.49	41.49	-12.51	54	175	200	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH140	Test Voltage	AC 120V/60Hz

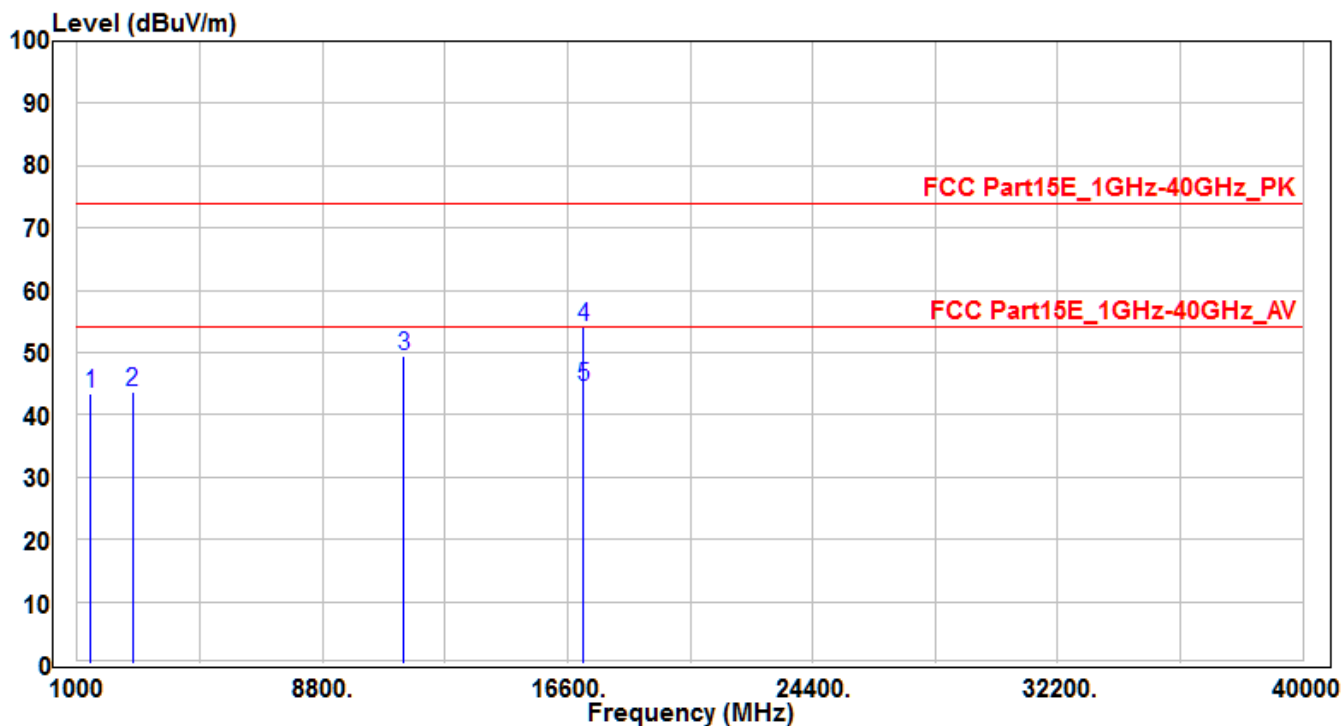


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1425	49.87	-6.52	43.35	-30.65	74	150	400	Peak
2		2754.85	46.21	-2.49	43.72	-30.28	74	150	400	Peak
3		11400	31	18.4	49.4	-24.6	74	150	400	Peak
4	*	17100	28.1	26.02	54.12	-19.88	74	115	230	Peak
5	*	17100	18.53	26.02	44.55	-9.45	54	115	230	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH140	Test Voltage	AC 120V/60Hz

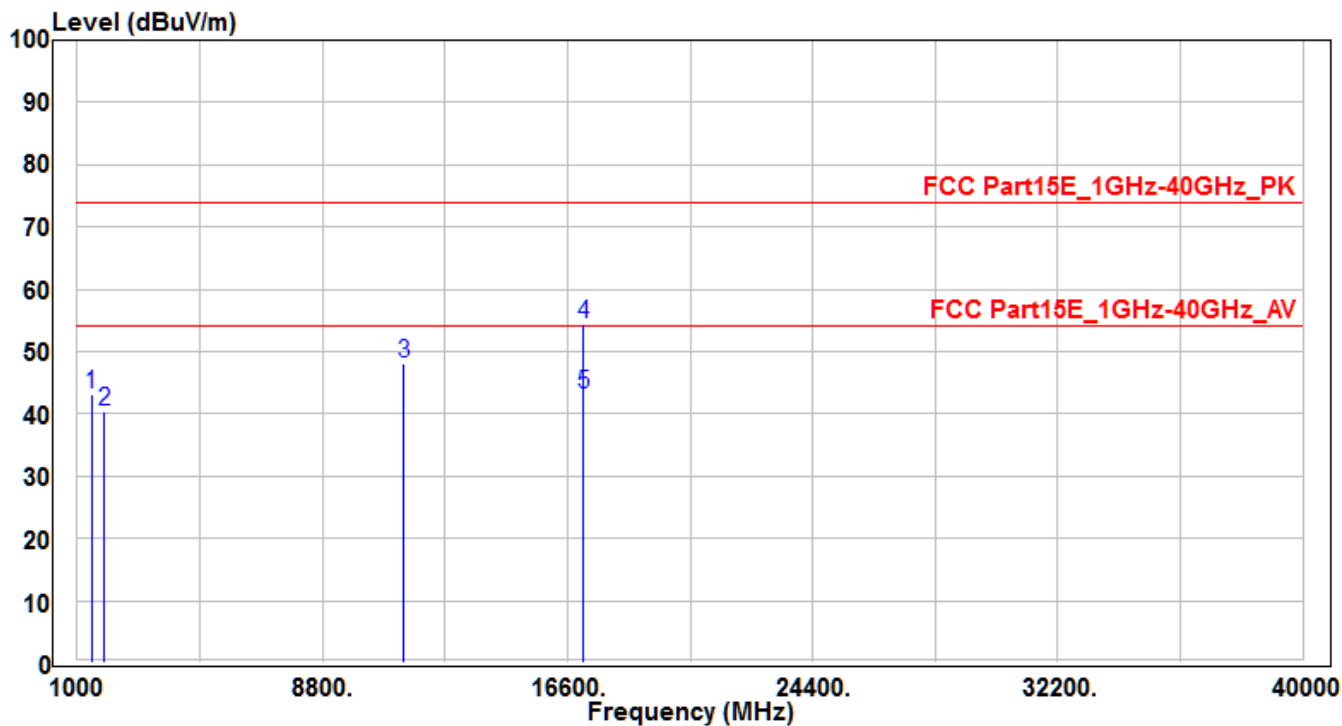


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1453.2	49.63	-6.45	43.18	-30.82	74	150	400	Peak
2		1856.3	45.51	-5.12	40.39	-33.61	74	150	400	Peak
3		11400	29.72	18.4	48.12	-25.88	74	150	400	Peak
4	*	17100	28.33	26.02	54.35	-19.65	74	185	260	Peak
5	*	17100	17.2	26.02	43.22	-10.78	54	185	260	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH144	Test Voltage	AC 120V/60Hz

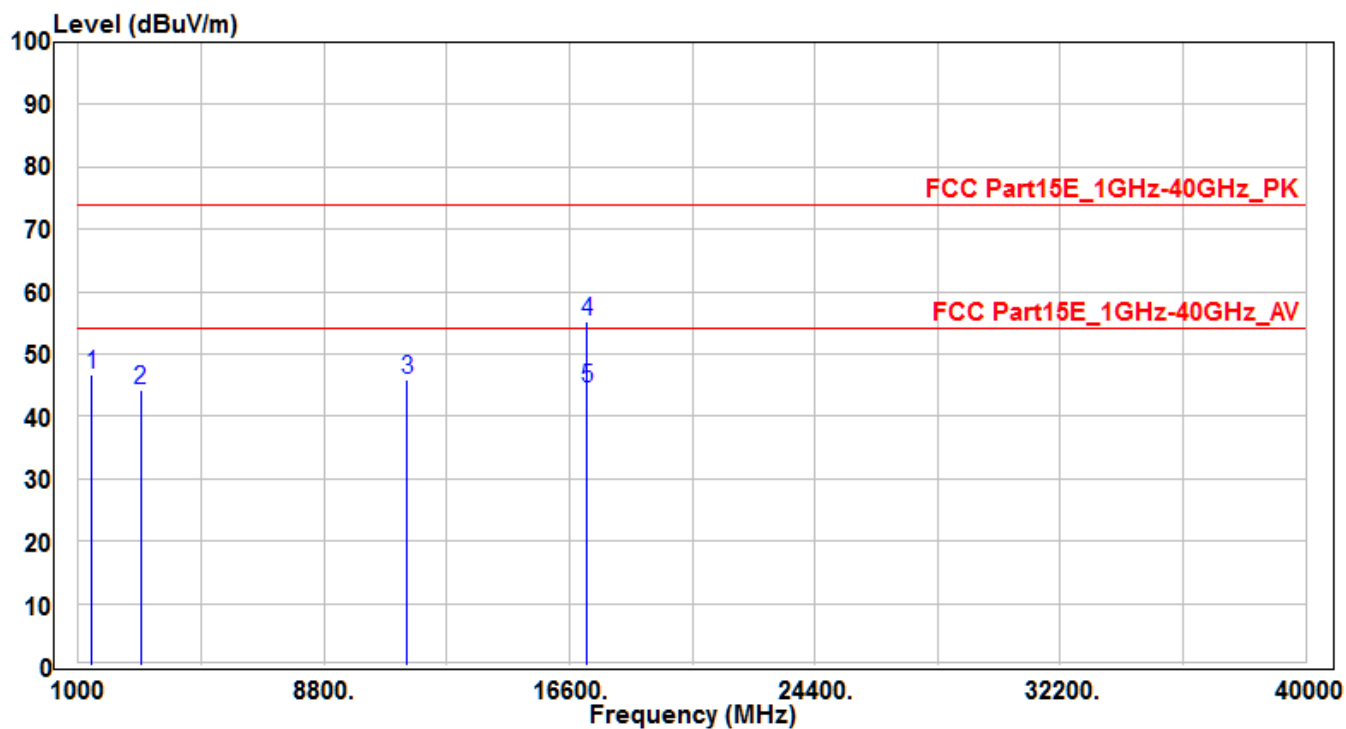


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1420.51	53.2	-6.52	46.68	-27.32	74	150	400	Peak
2		2988	47.14	-2.91	44.23	-29.77	74	150	400	Peak
3		11440	27.65	18.38	46.03	-27.97	74	150	400	Peak
4	*	17160	28.7	26.43	55.13	-18.87	74	190	360	Peak
5	*	17160	18.01	26.43	44.44	-9.56	54	190	360	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH144	Test Voltage	AC 120V/60Hz

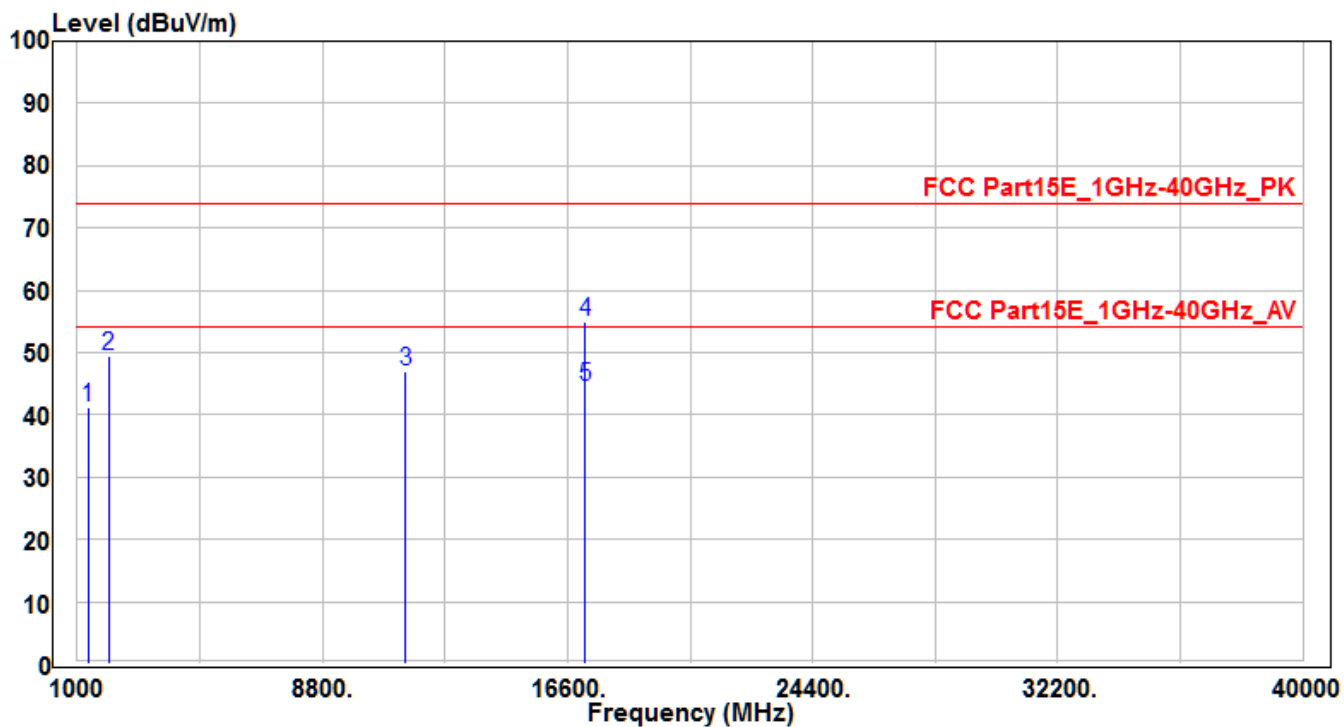


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1356.24	47.96	-6.69	41.27	-32.73	74	150	400	Peak
2		1999.687	54.03	-4.62	49.41	-24.59	74	150	400	Peak
3		11440	28.54	18.38	46.92	-27.08	74	150	400	Peak
4	*	17160	28.65	26.43	55.08	-18.92	74	250	210	Peak
5	*	17160	18.21	26.43	44.64	-9.36	54	250	210	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH149	Test Voltage	AC 120V/60Hz

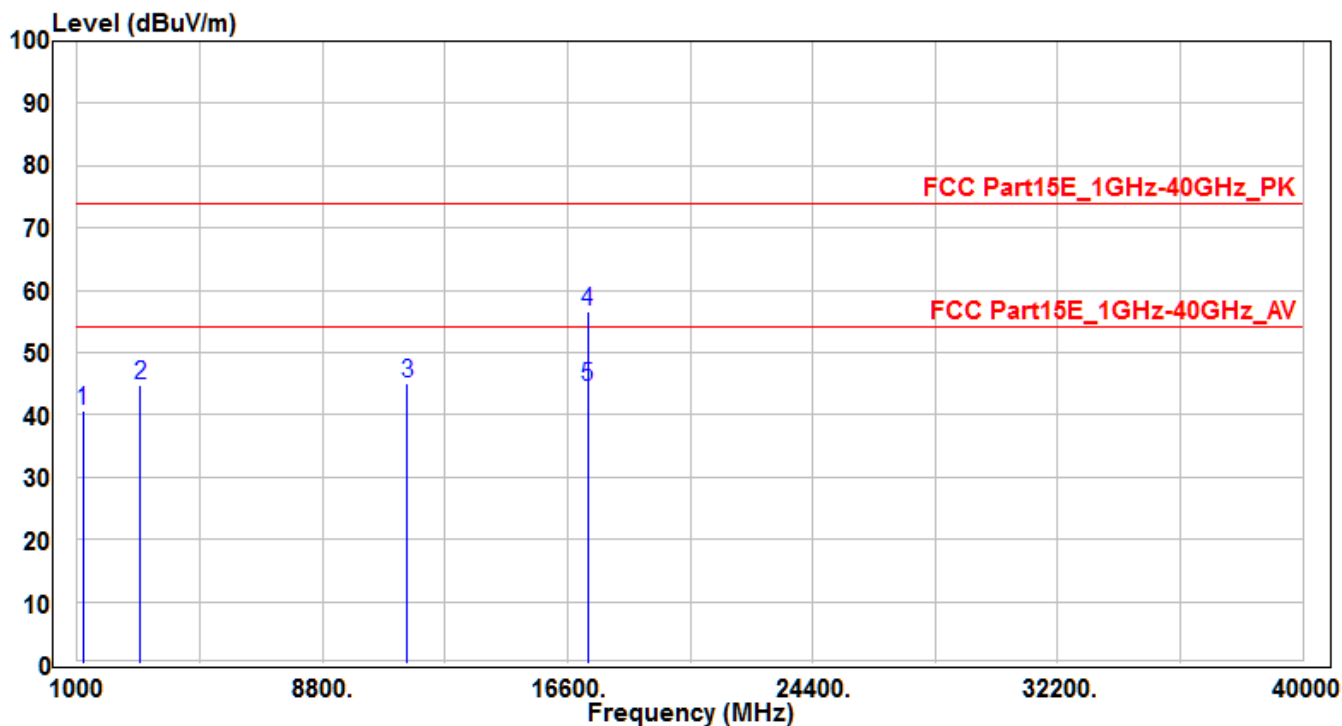


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.17	47.79	-7.07	40.72	-33.28	74	150	400	Peak
2		2997.67	47.74	-2.93	44.81	-29.19	74	150	400	Peak
3		11490	26.64	18.35	44.99	-29.01	74	150	400	Peak
4	*	17235	29.64	26.96	56.6	-17.4	74	190	20	Peak
5	*	17235	17.45	26.96	44.41	-9.59	54	190	20	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH149	Test Voltage	AC 120V/60Hz

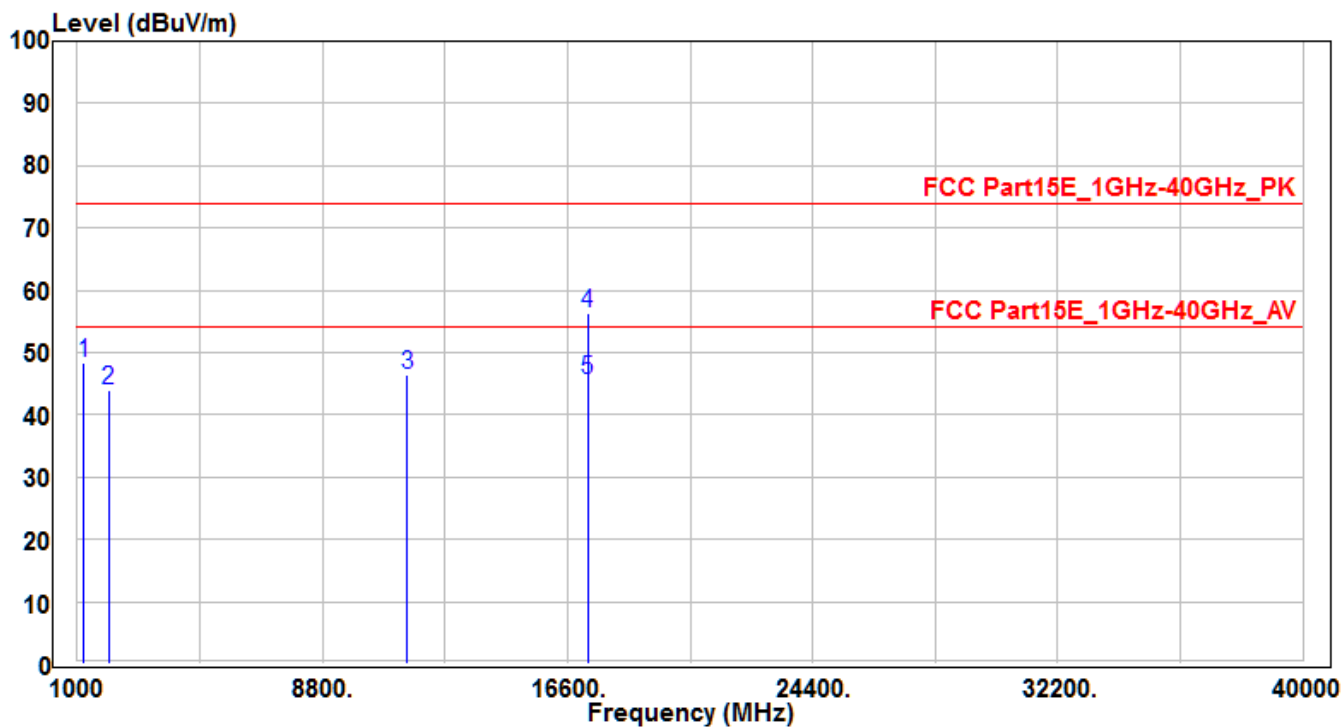


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.95	55.37	-7.07	48.3	-25.7	74	150	400	Peak
2		1992.32	48.64	-4.65	43.99	-30.01	74	150	400	Peak
3		11490	28.14	18.35	46.49	-27.51	74	150	400	Peak
4	*	17235	29.47	26.96	56.43	-17.57	74	220	400	Peak
5	*	17235	18.53	26.96	45.49	-8.51	54	220	400	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH157	Test Voltage	AC 120V/60Hz

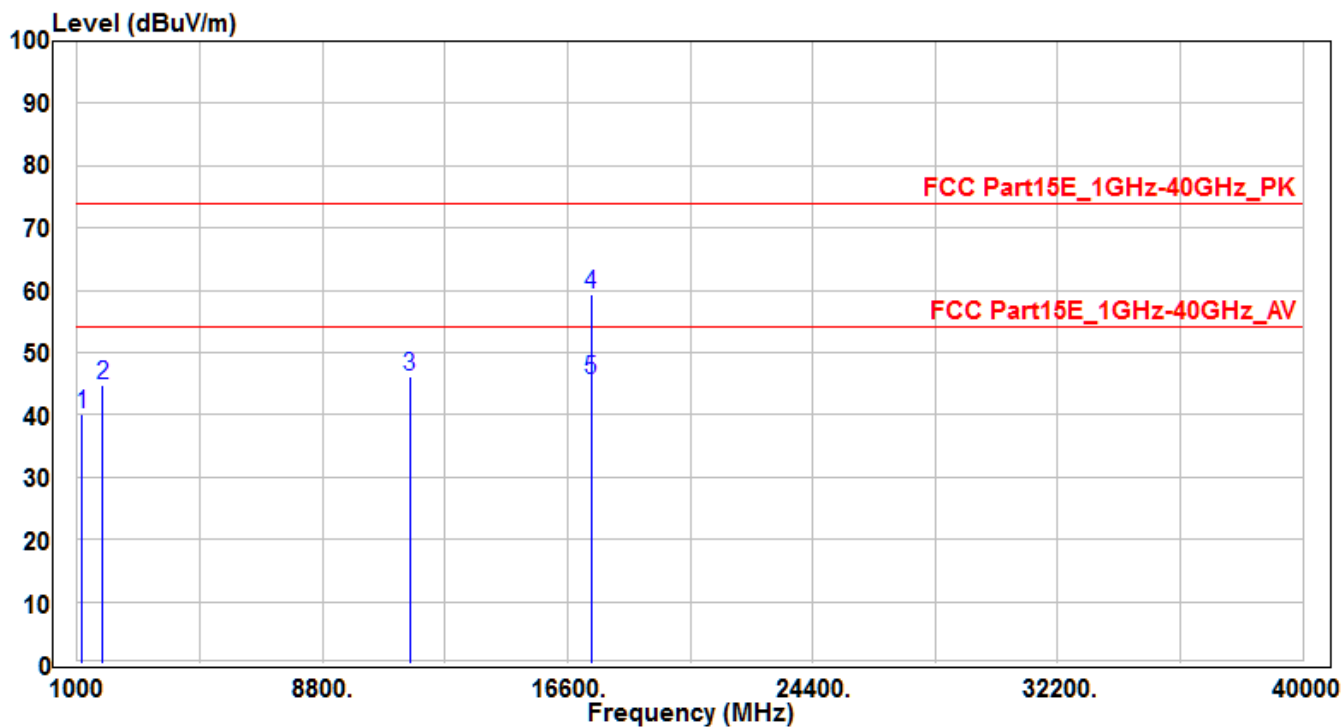


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1145.25	47.2	-7.19	40.01	-33.99	74	150	400	Peak
2		1796.52	50	-5.32	44.68	-29.32	74	150	400	Peak
3		11570	27.84	18.24	46.08	-27.92	74	150	400	Peak
4	*	17355	31.53	27.81	59.34	-14.66	74	185	200	Peak
5	*	17355	17.93	27.81	45.74	-8.26	54	185	200	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH157	Test Voltage	AC 120V/60Hz

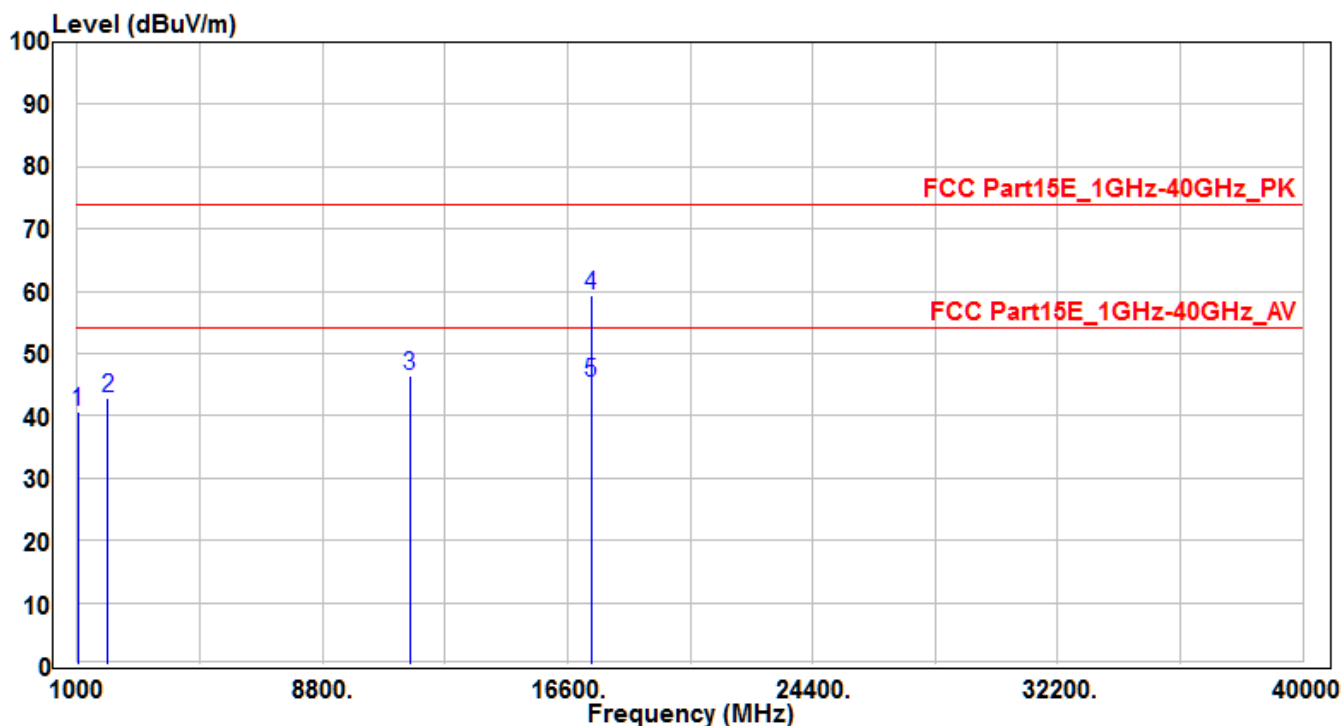


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1023.6	48.24	-7.5	40.74	-33.26	74	150	400	Peak
2		1968.54	47.69	-4.73	42.96	-31.04	74	150	400	Peak
3		11570	28.22	18.24	46.46	-27.54	74	150	400	Peak
4	*	17355	31.59	27.81	59.4	-14.6	74	110	125	Peak
5	*	17355	17.55	27.81	45.36	-8.64	54	110	125	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH165	Test Voltage	AC 120V/60Hz

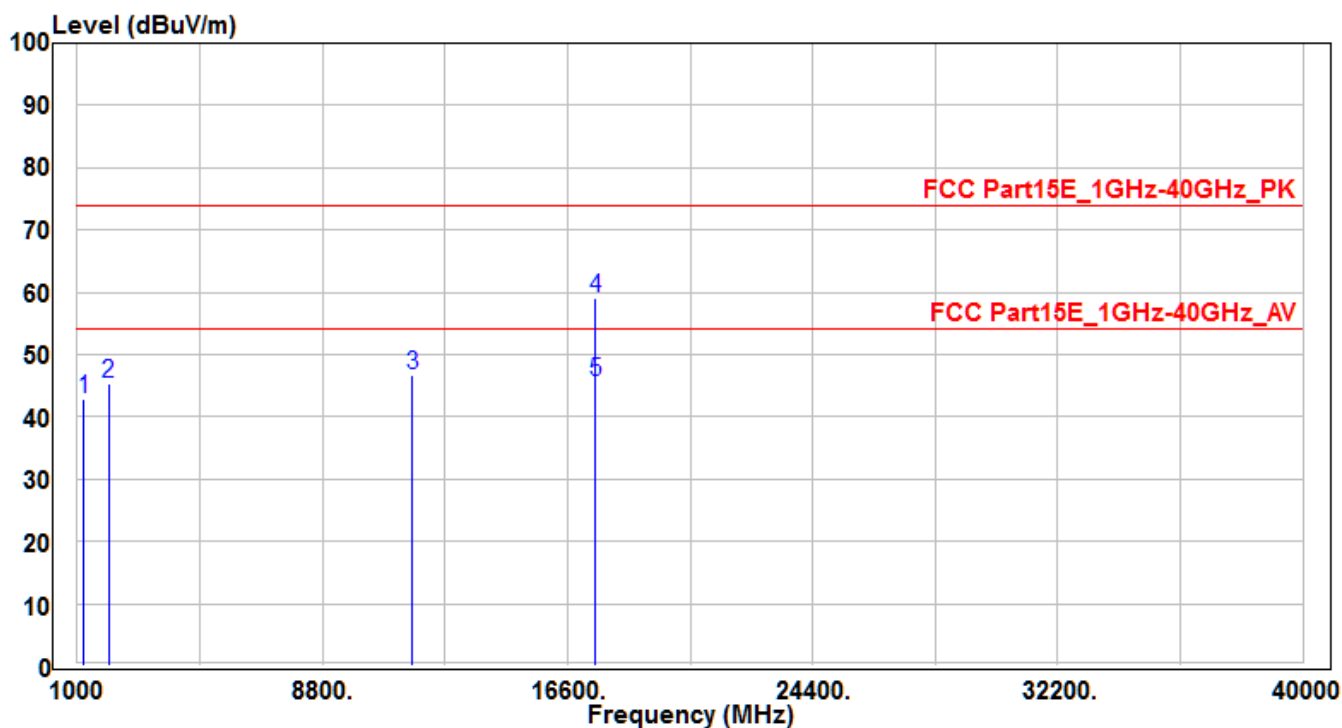


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1222.02	49.88	-7.01	42.87	-31.13	74	150	400	Peak
2		1999.99	49.99	-4.62	45.37	-28.63	74	150	400	Peak
3		11650	28.52	18.1	46.62	-27.38	74	150	400	Peak
4	*	17475	30.52	28.66	59.18	-14.82	74	160	200	Peak
5	*	17475	17	28.66	45.66	-8.34	54	160	200	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH165	Test Voltage	AC 120V/60Hz

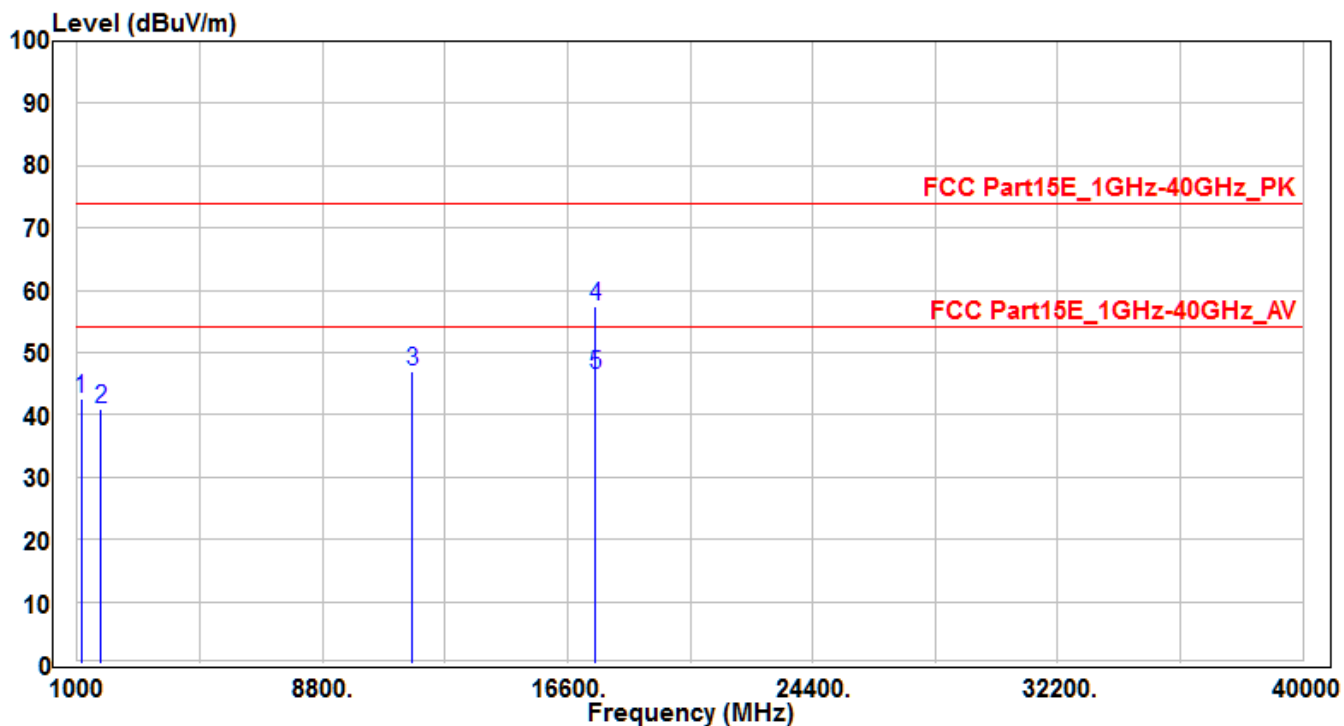


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1120	49.86	-7.26	42.6	-31.4	74	150	400	Peak
2		1758	46.5	-5.45	41.05	-32.95	74	150	400	Peak
3		11650	28.77	18.1	46.87	-27.13	74	150	400	Peak
4	*	17475	28.89	28.66	57.55	-16.45	74	175	-40	Peak
5	*	17475	17.9	28.66	46.56	-7.44	54	175	-40	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH38	Test Voltage	AC 120V/60Hz

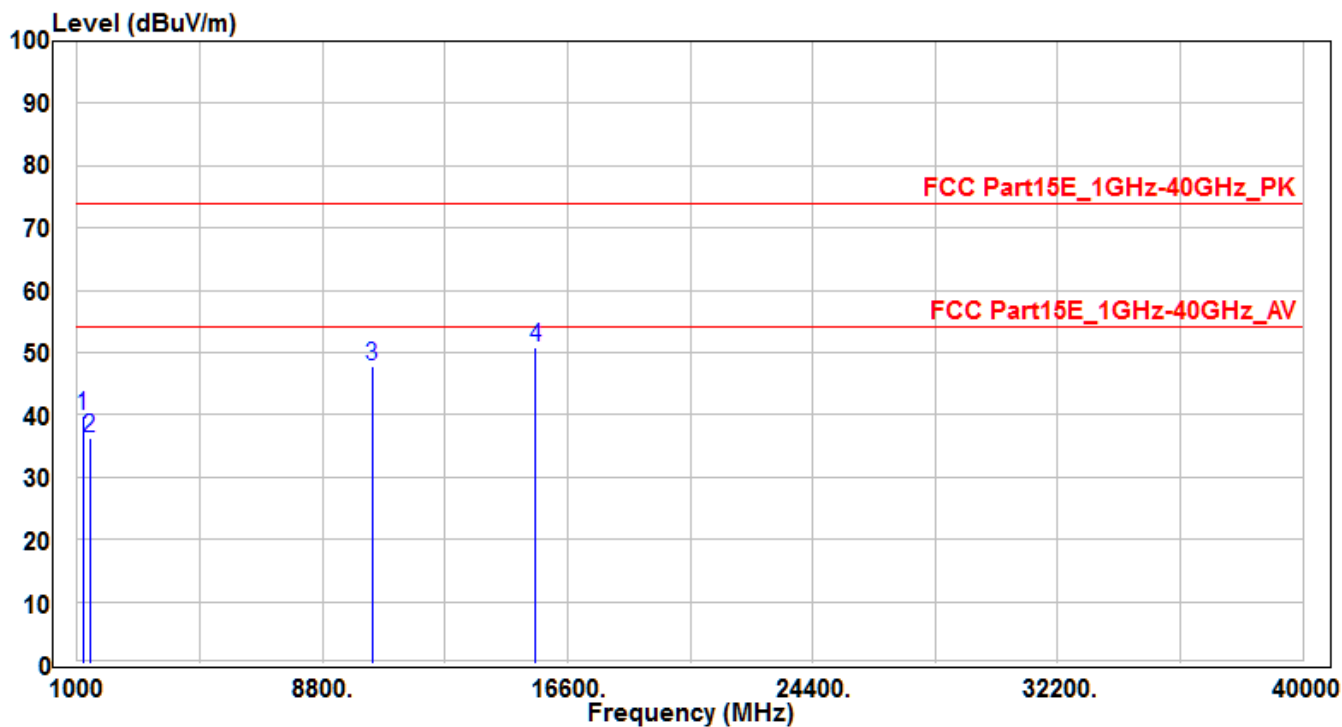


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1194.6	46.94	-7.07	39.87	-34.13	74	150	400	Peak
2	1393.82	42.74	-6.58	36.16	-37.84	74	150	400	Peak
3	10380	30.94	16.82	47.76	-26.24	74	150	400	Peak
4	*	30.01	20.96	50.97	-23.03	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH38	Test Voltage	AC 120V/60Hz

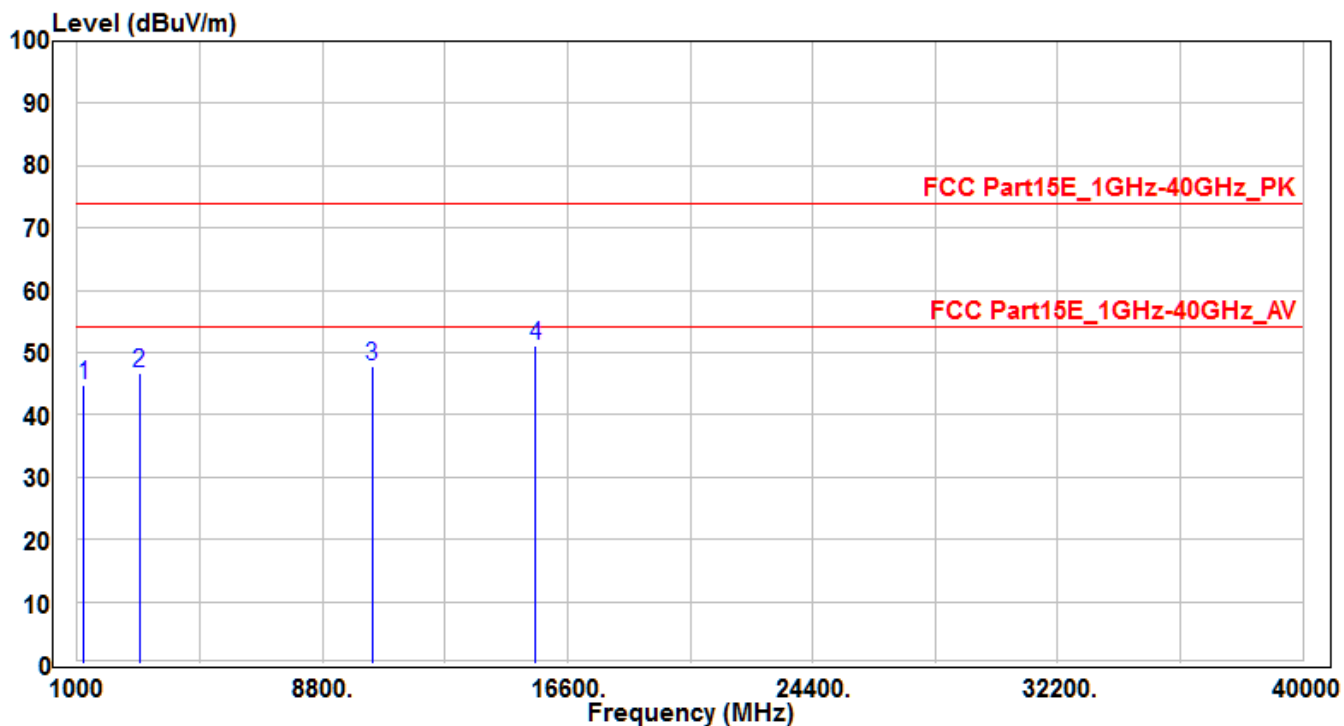


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1196.63	51.81	-7.07	44.74	-29.26	74	150	400	Peak
2	2987.67	49.64	-2.91	46.73	-27.27	74	150	400	Peak
3	10380	31.09	16.82	47.91	-26.09	74	150	400	Peak
4	* 15570	30.12	20.96	51.08	-22.92	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH46	Test Voltage	AC 120V/60Hz

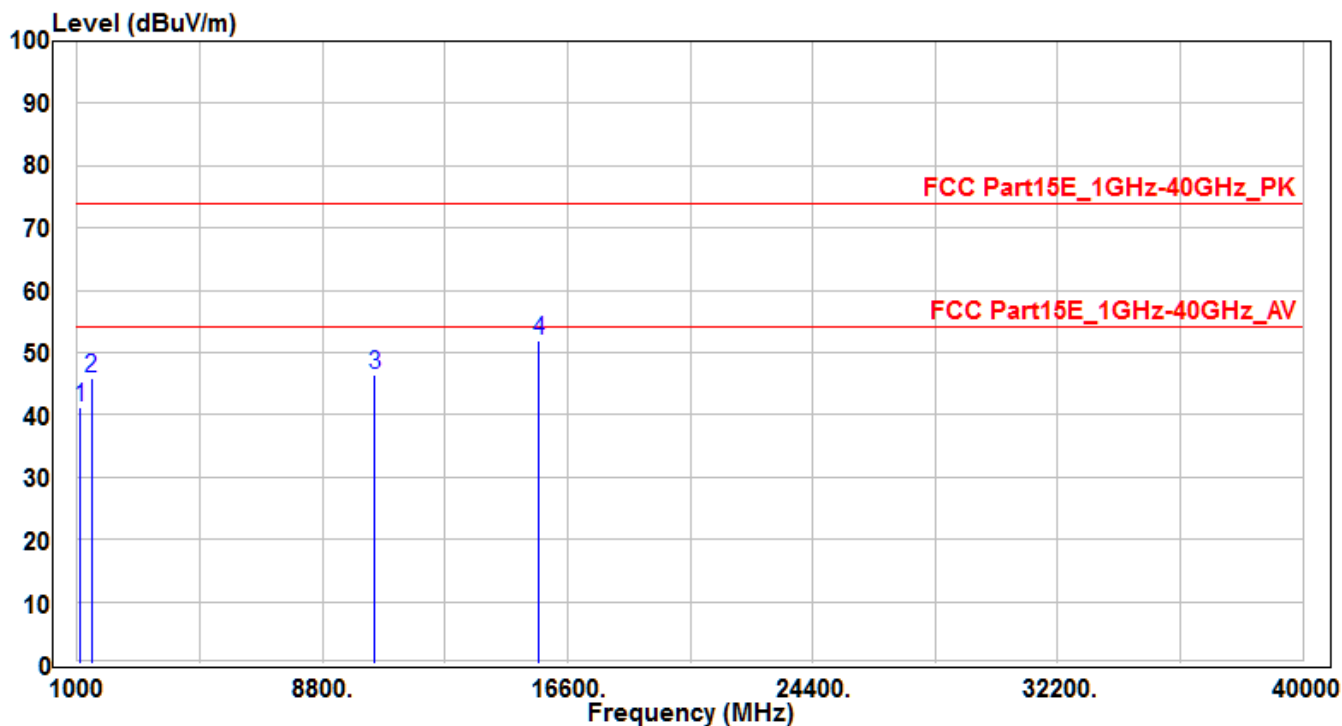


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1111	48.52	-7.28	41.24	-32.76	74	150	400	Peak
2	1456.15	52.33	-6.44	45.89	-28.11	74	150	400	Peak
3	10460	29.36	17.12	46.48	-27.52	74	150	400	Peak
4	*	31.17	20.81	51.98	-22.02	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH46	Test Voltage	AC 120V/60Hz

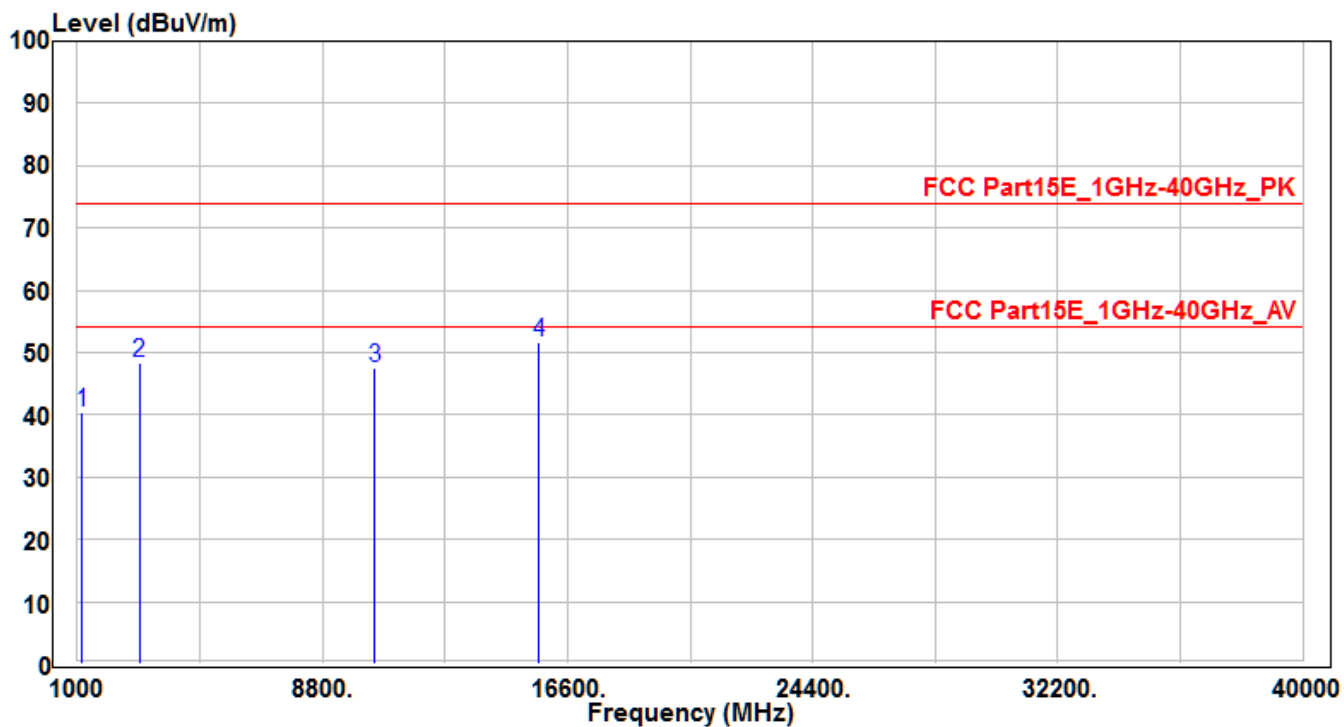


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1152.02	47.65	-7.18	40.47	-33.53	74	150	400	Peak
2		2987.56	51.24	-2.91	48.33	-25.67	74	150	400	Peak
3		10460	30.43	17.12	47.55	-26.45	74	150	400	Peak
4	*	15690	30.88	20.81	51.69	-22.31	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH54	Test Voltage	AC 120V/60Hz

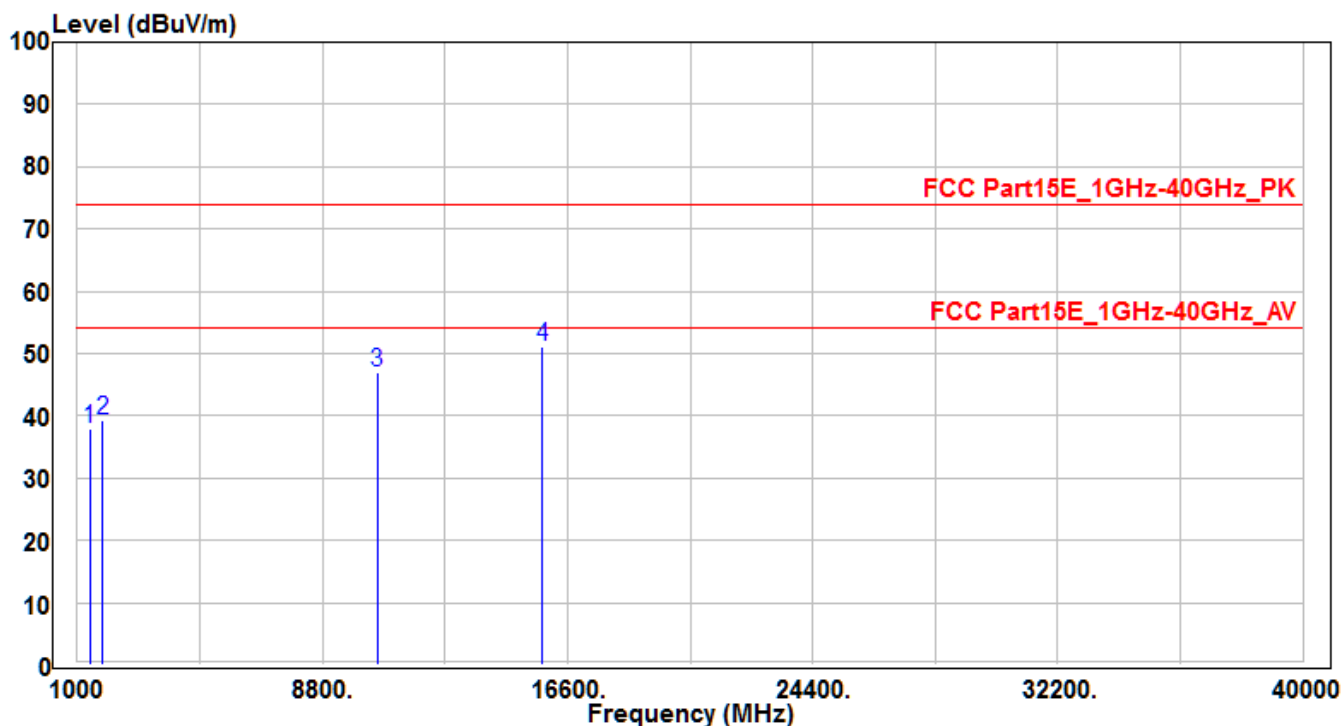


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1399.28	44.49	-6.58	37.91	-36.09	74	150	400	Peak
2		1797.87	44.51	-5.31	39.2	-34.8	74	150	400	Peak
3		10540	29.57	17.37	46.94	-27.06	74	150	400	Peak
4	*	15810	30.45	20.65	51.1	-22.9	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH54	Test Voltage	AC 120V/60Hz

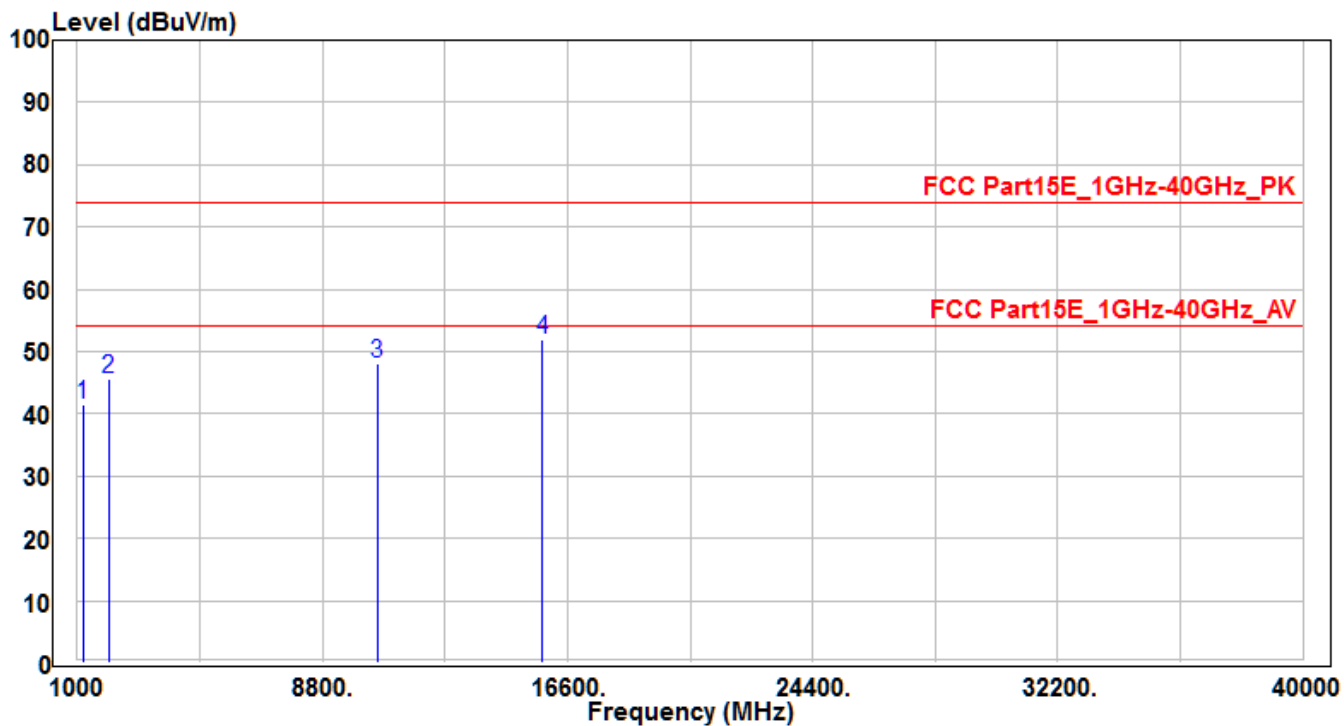


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1195.07	48.44	-7.07	41.37	-32.63	74	150	400	Peak
2	1995.98	50.13	-4.63	45.5	-28.5	74	150	400	Peak
3	10540	30.73	17.37	48.1	-25.9	74	150	400	Peak
4	*	15810	20.65	52	-22	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH62	Test Voltage	AC 120V/60Hz

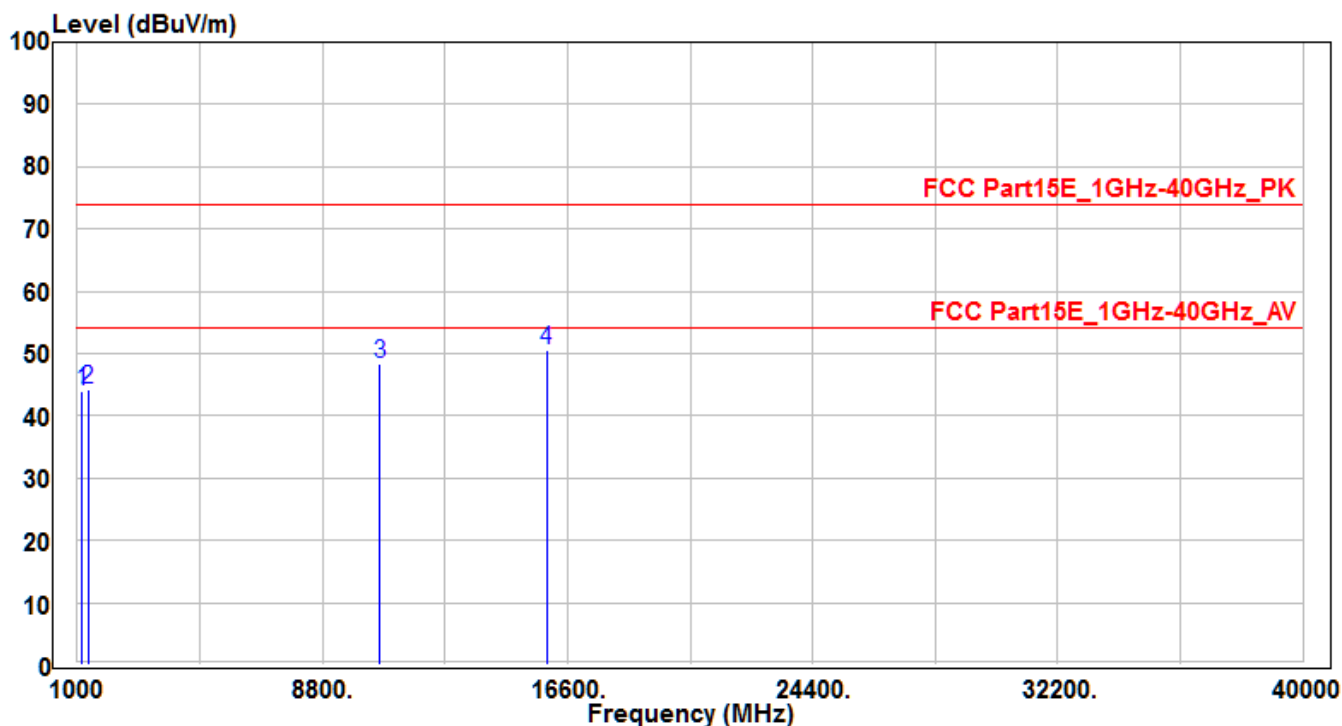


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1154.21	51.21	-7.18	44.03	-29.97	74	150	400	Peak
2	1355.55	51.01	-6.69	44.32	-29.68	74	150	400	Peak
3	10620	30.73	17.58	48.31	-25.69	74	150	400	Peak
4	* 15930	29.97	20.5	50.47	-23.53	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH62	Test Voltage	AC 120V/60Hz

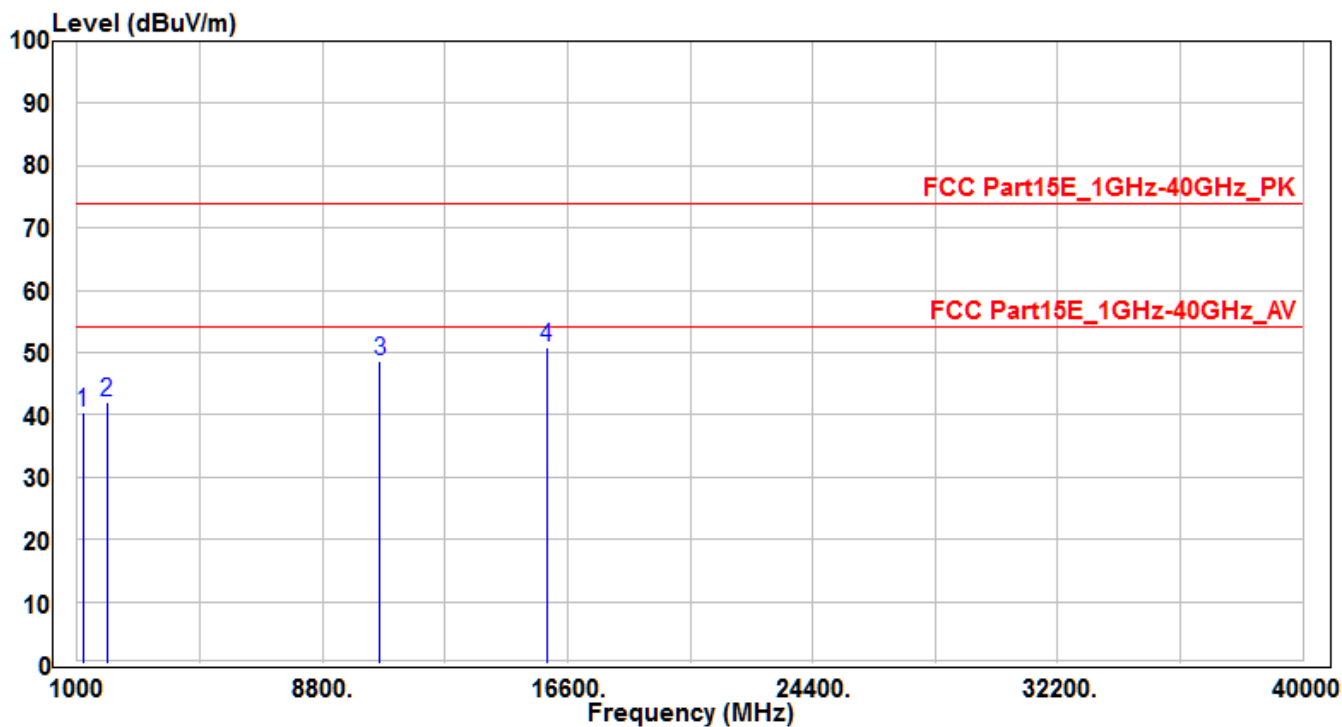


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1185.369	47.51	-7.1	40.41	-33.59	74	150	400	Peak
2	1958.64	46.87	-4.76	42.11	-31.89	74	150	400	Peak
3	10620	30.98	17.58	48.56	-25.44	74	150	400	Peak
4	*	15930	20.5	50.79	-23.21	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH102	Test Voltage	AC 120V/60Hz

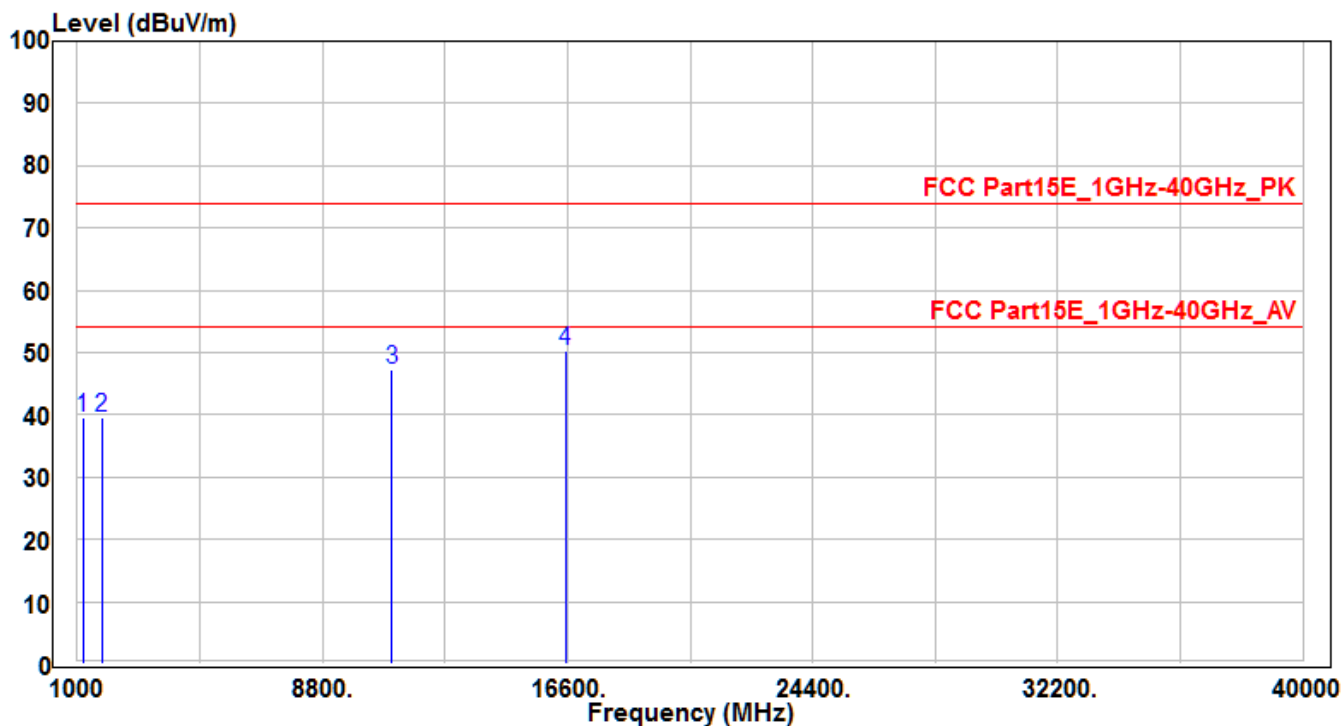


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1195.38	46.55	-7.07	39.48	-34.52	74	150	400	Peak
2	1792.71	44.87	-5.33	39.54	-34.46	74	150	400	Peak
3	11020	28.72	18.57	47.29	-26.71	74	150	400	Peak
4	*	29.37	21.03	50.4	-23.6	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH102	Test Voltage	AC 120V/60Hz

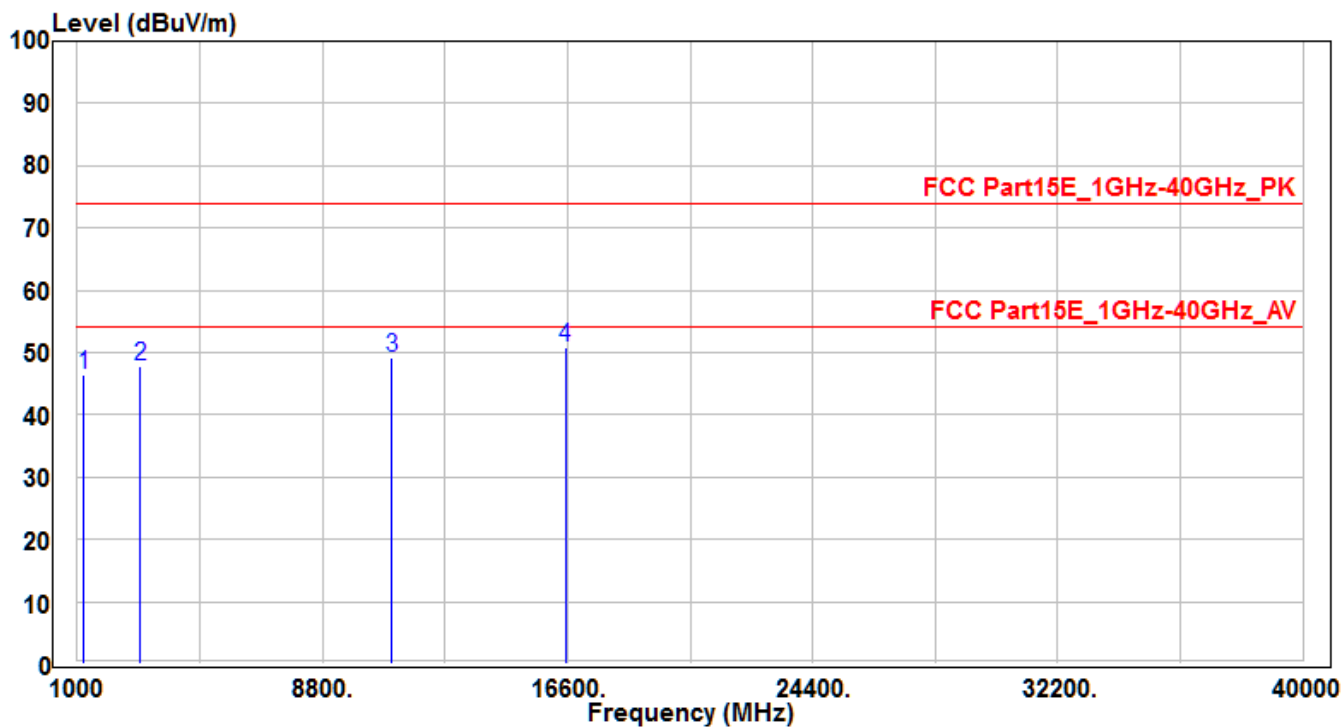


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.79	53.39	-7.07	46.32	-27.68	74	150	400	Peak
2		2994.23	50.73	-2.92	47.81	-26.19	74	150	400	Peak
3		11020	30.64	18.57	49.21	-24.79	74	150	400	Peak
4	*	16530	29.91	21.03	50.94	-23.06	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH110	Test Voltage	AC 120V/60Hz

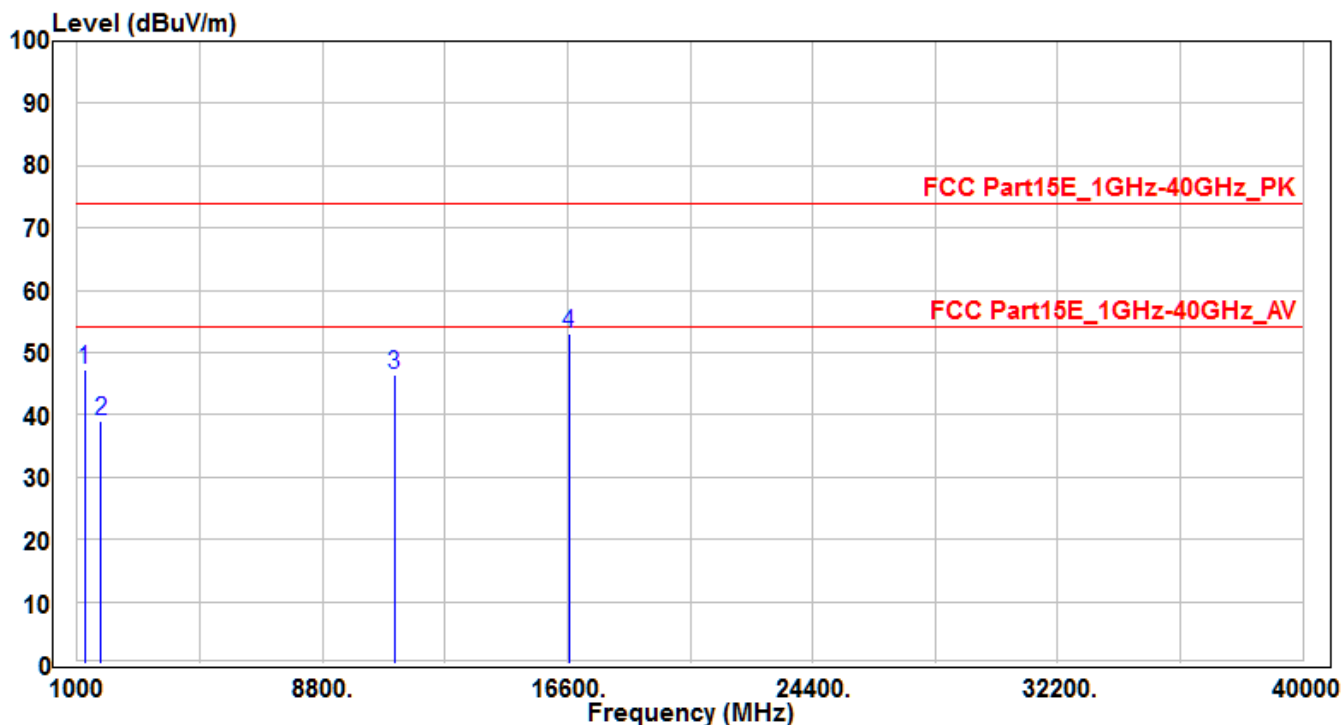


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1234.56	54.32	-6.98	47.34	-26.66	74	150	400	Peak
2		1758.4	44.43	-5.44	38.99	-35.01	74	150	400	Peak
3		11100	27.93	18.53	46.46	-27.54	74	150	400	Peak
4	*	16650	30.91	22.13	53.04	-20.96	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH110	Test Voltage	AC 120V/60Hz

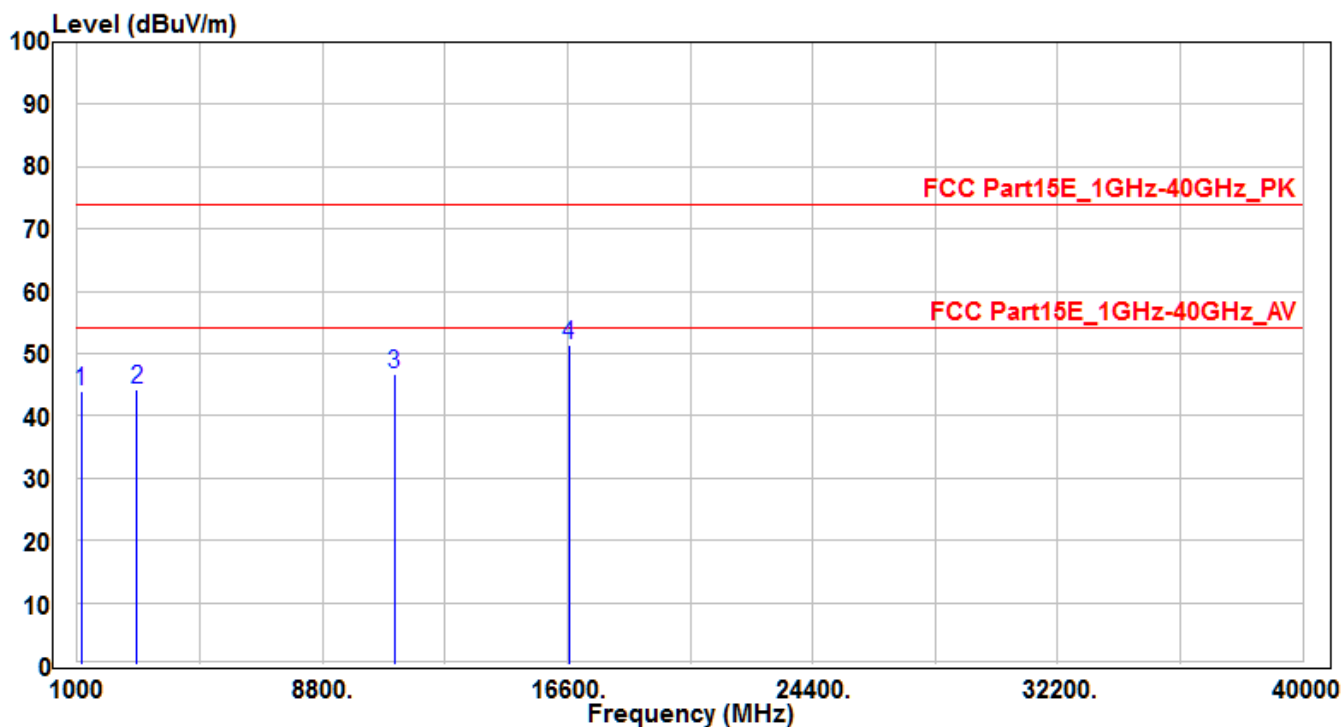


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1125	51.21	-7.25	43.96	-30.04	74	150	400	Peak
2	2895.45	46.85	-2.74	44.11	-29.89	74	150	400	Peak
3	11100	28.08	18.53	46.61	-27.39	74	150	400	Peak
4	* 16650	29.27	22.13	51.4	-22.6	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH118	Test Voltage	AC 120V/60Hz

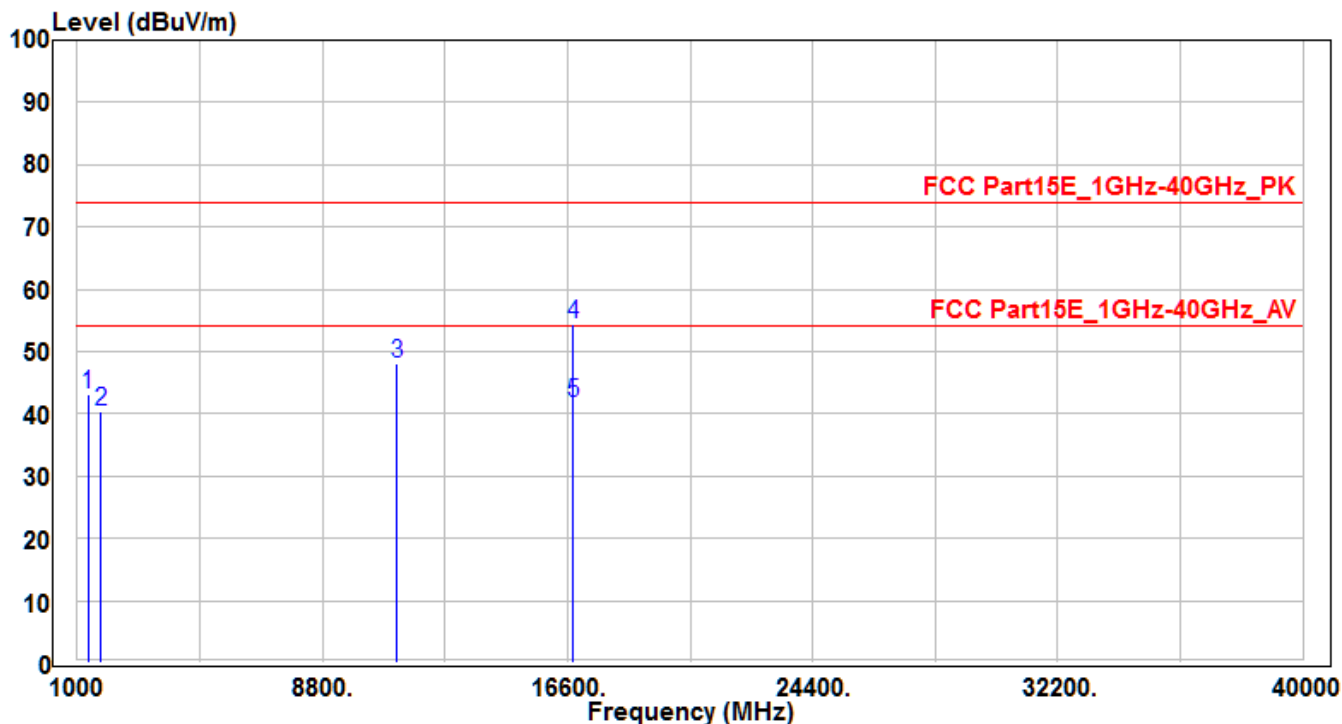


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1340.6	49.86	-6.72	43.14	-30.86	74	150	400	Peak
2		1758	45.82	-5.45	40.37	-33.63	74	150	400	Peak
3		11180	29.63	18.5	48.13	-25.87	74	150	400	Peak
4	*	16770	31.28	23.22	54.5	-19.5	74	185	40	Peak
5	*	16770	18.52	23.22	41.74	-12.26	54	185	40	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH118	Test Voltage	AC 120V/60Hz

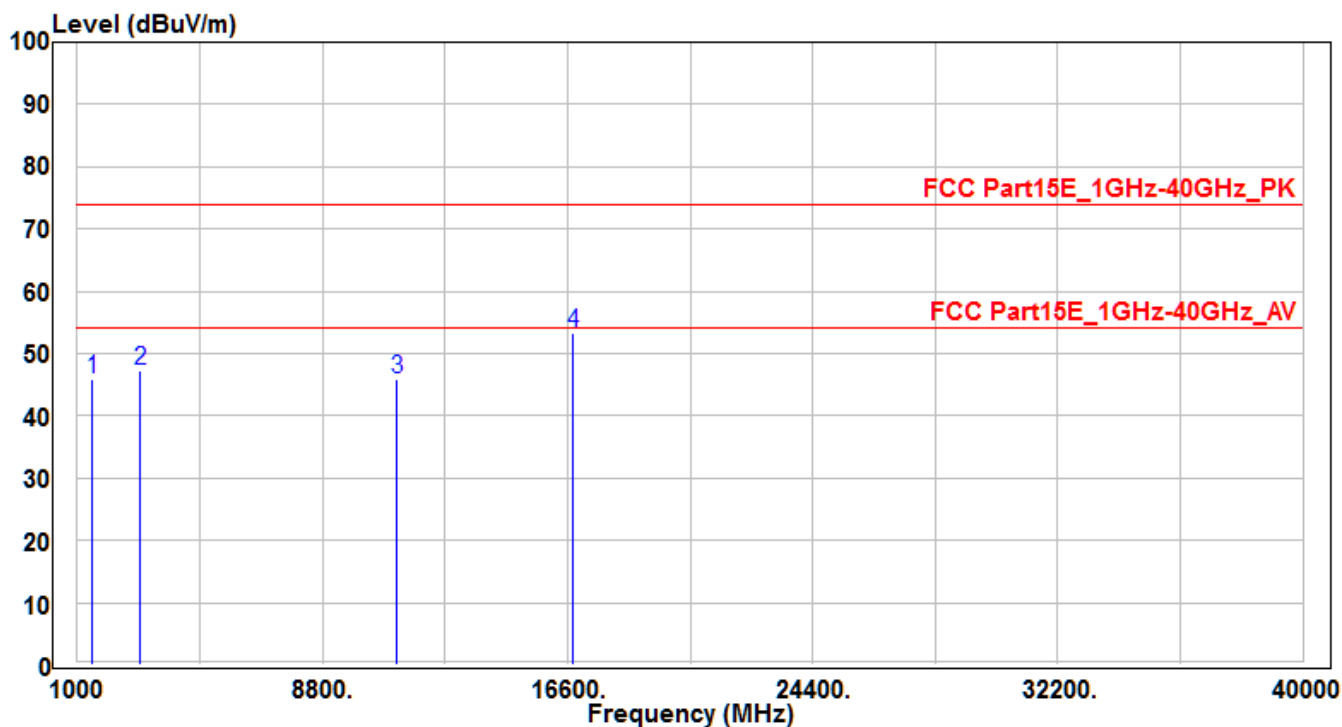


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1485.259	52.36	-6.37	45.99	-28.01	74	150	400	Peak
2	2999.63	50.31	-2.93	47.38	-26.62	74	150	400	Peak
3	11180	27.52	18.5	46.02	-27.98	74	150	400	Peak
4	* 16770	30.03	23.22	53.25	-20.75	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH134	Test Voltage	AC 120V/60Hz

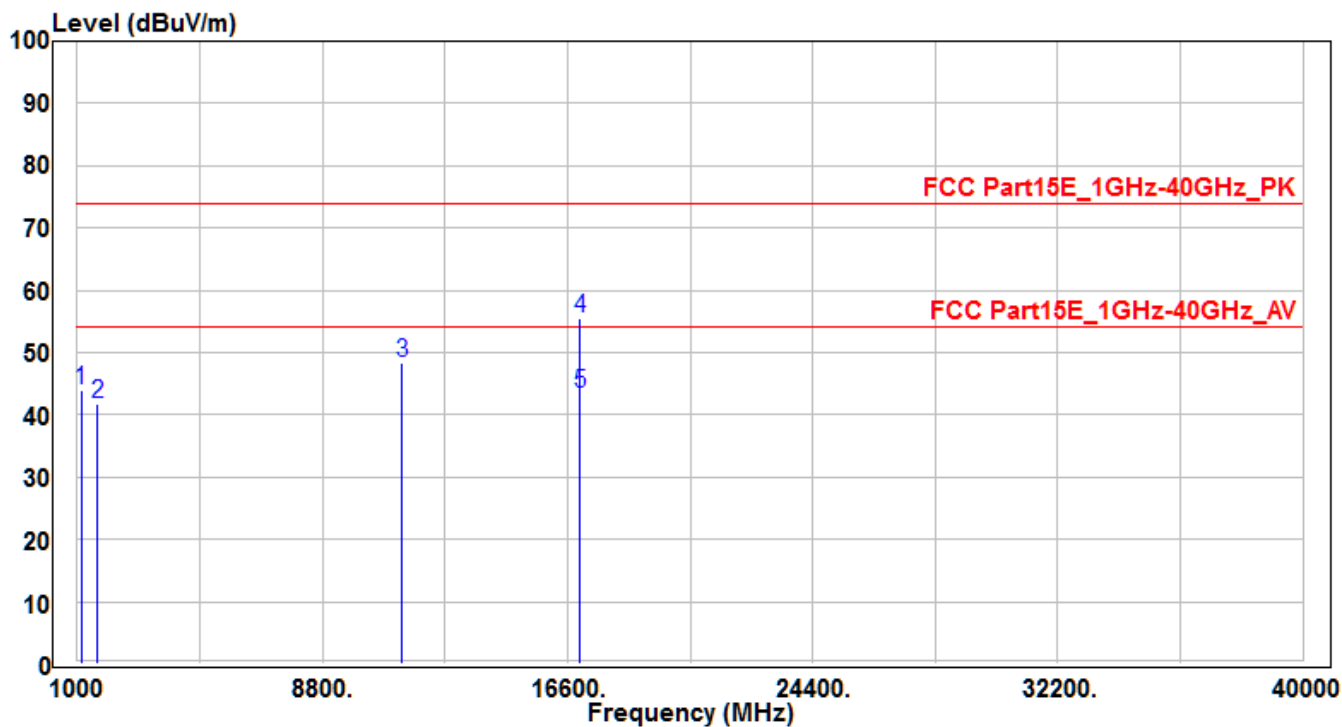


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1125.74	51.2	-7.24	43.96	-30.04	74	150	400	Peak
2		1658.6	47.45	-5.79	41.66	-32.34	74	150	400	Peak
3		11340	29.87	18.42	48.29	-25.71	74	150	400	Peak
4	*	17010	30.03	25.37	55.4	-18.6	74	145	220	Peak
5	*	17010	17.96	25.37	43.33	-10.67	54	145	220	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH134	Test Voltage	AC 120V/60Hz

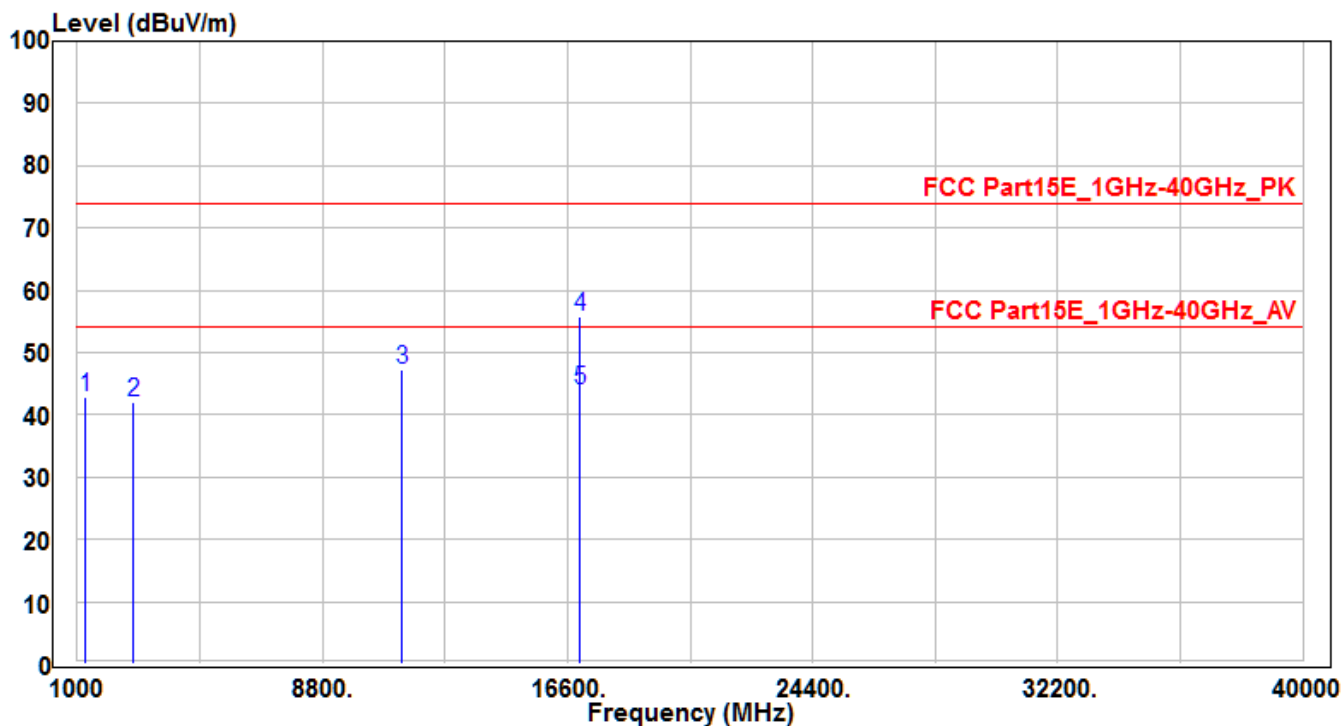


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1254.52	49.85	-6.93	42.92	-31.08	74	150	400	Peak
2		2789.555	44.52	-2.55	41.97	-32.03	74	150	400	Peak
3		11340	28.88	18.42	47.3	-26.7	74	150	400	Peak
4	*	17010	30.46	25.37	55.83	-18.17	74	185	60	Peak
5	*	17010	18.54	25.37	43.91	-10.09	54	185	60	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH142	Test Voltage	AC 120V/60Hz

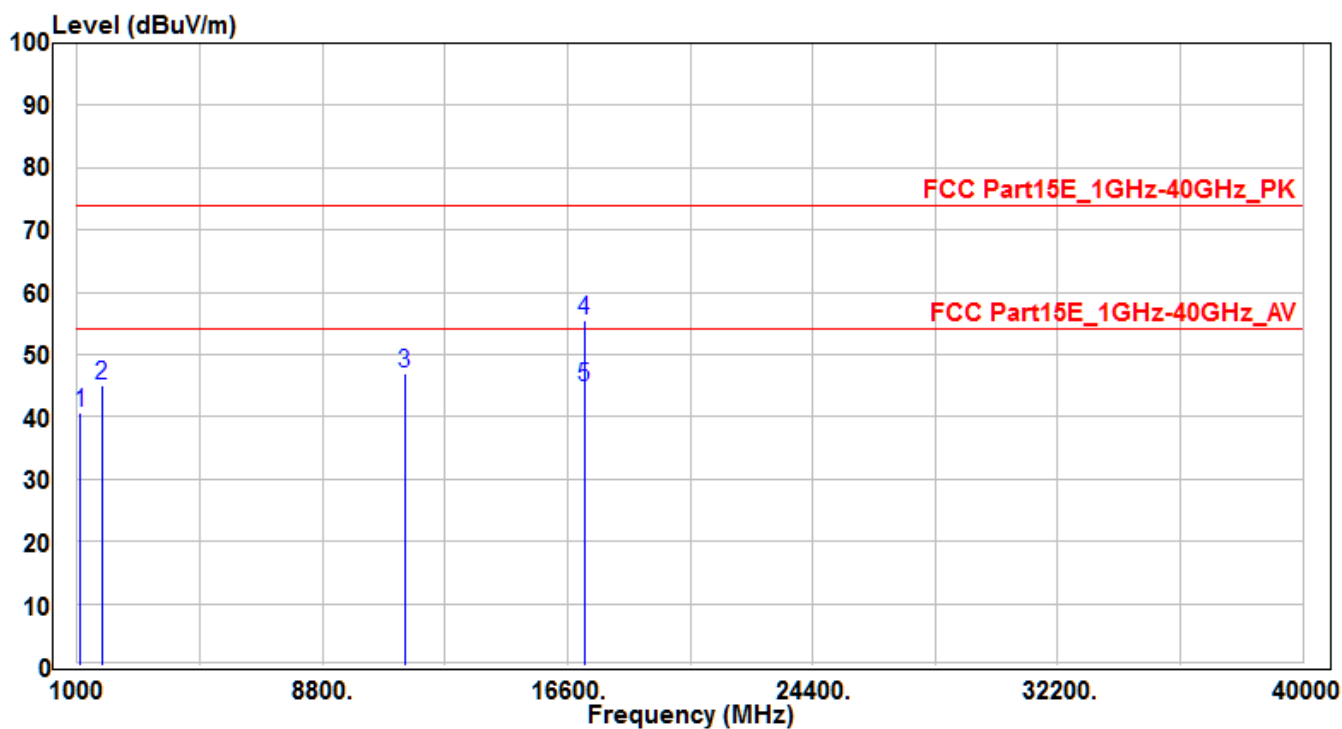


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1100.54	48.11	-7.31	40.8	-33.2	74	150	400	Peak
2		1785.45	50.3	-5.35	44.95	-29.05	74	150	400	Peak
3		11420	28.61	18.39	47	-27	74	150	400	Peak
4	*	17130	29.26	26.22	55.48	-18.52	74	185	160	Peak
5	*	17130	18.53	26.22	44.75	-9.25	54	185	160	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH142	Test Voltage	AC 120V/60Hz

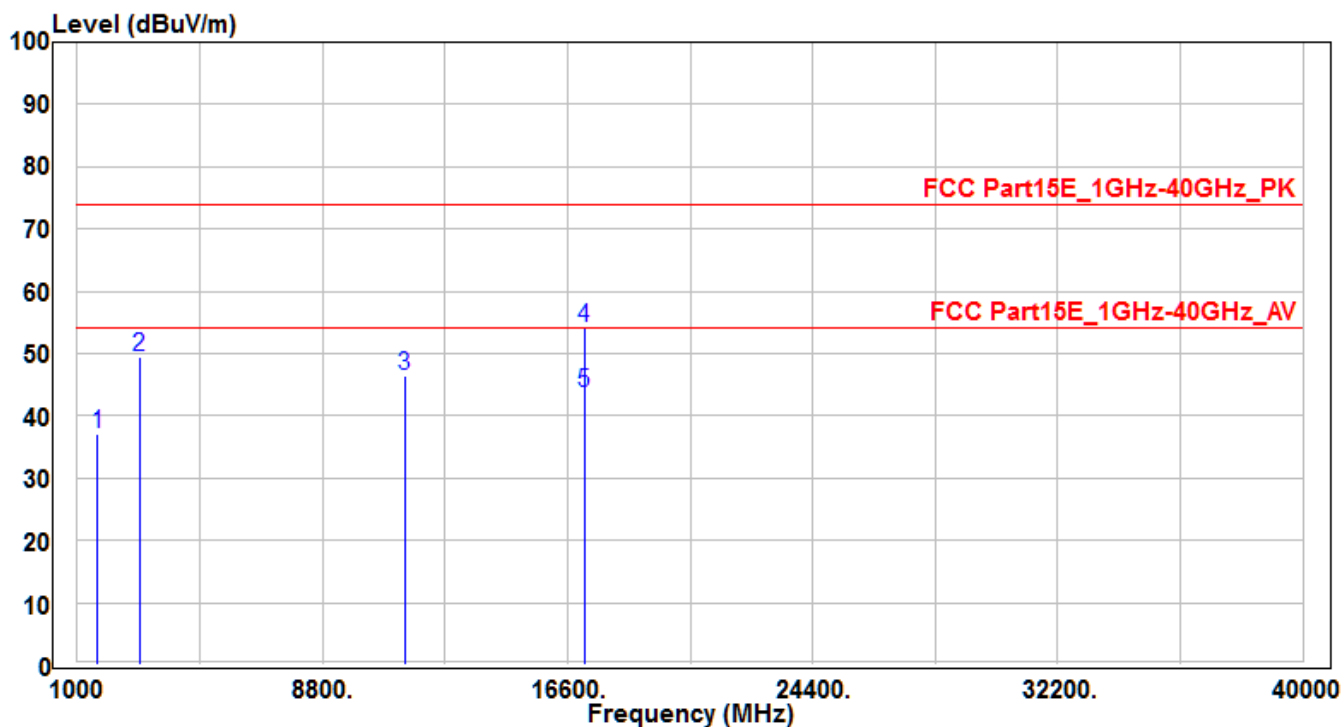


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1658.96	42.99	-5.79	37.2	-36.8	74	150	400	Peak
2		2978	52.37	-2.9	49.47	-24.53	74	150	400	Peak
3		11420	27.93	18.39	46.32	-27.68	74	150	400	Peak
4	*	17130	27.9	26.22	54.12	-19.88	74	160	120	Peak
5	*	17130	17.59	26.22	43.81	-10.19	54	160	120	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH151	Test Voltage	AC 120V/60Hz

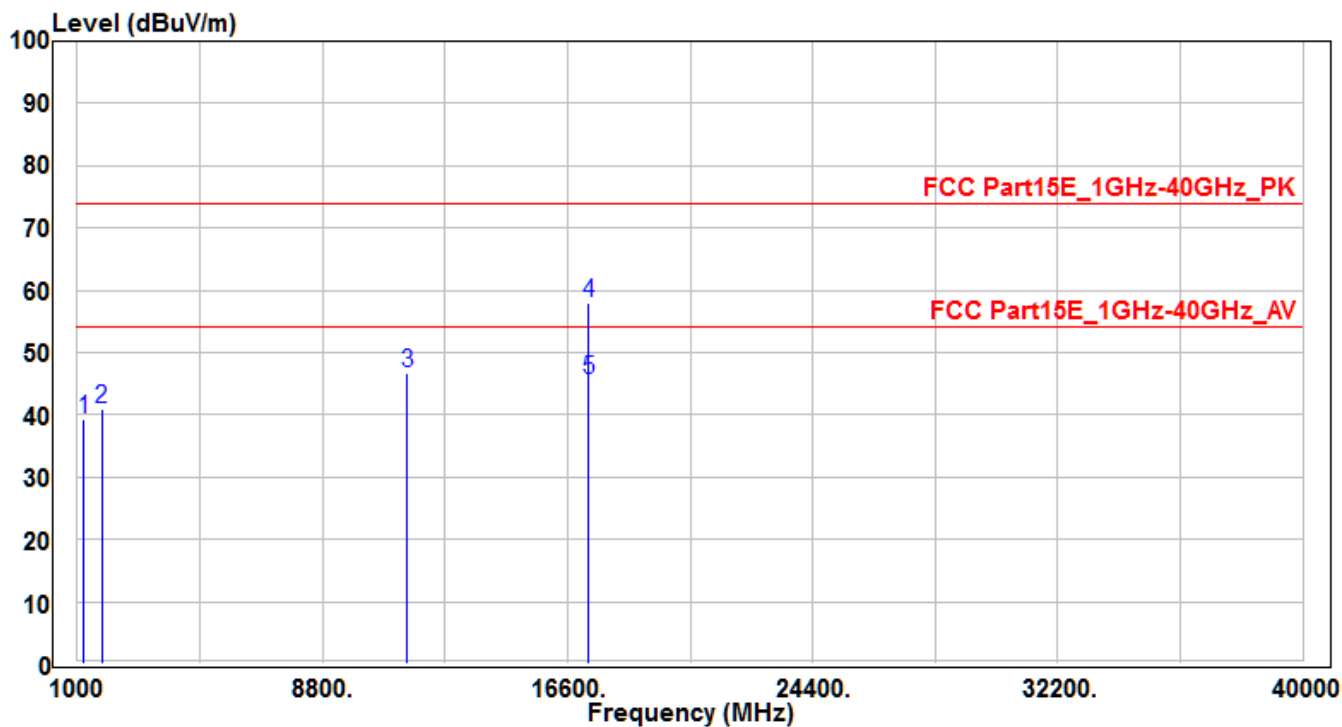


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1199.6	46.46	-7.06	39.4	-34.6	74	150	400	Peak
2		1790.05	46.15	-5.34	40.81	-33.19	74	150	400	Peak
3		11510	28.41	18.34	46.75	-27.25	74	150	400	Peak
4	*	17265	30.78	27.19	57.97	-16.03	74	185	185	Peak
5	*	17265	18.31	27.19	45.5	-8.5	54	185	185	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH151	Test Voltage	AC 120V/60Hz

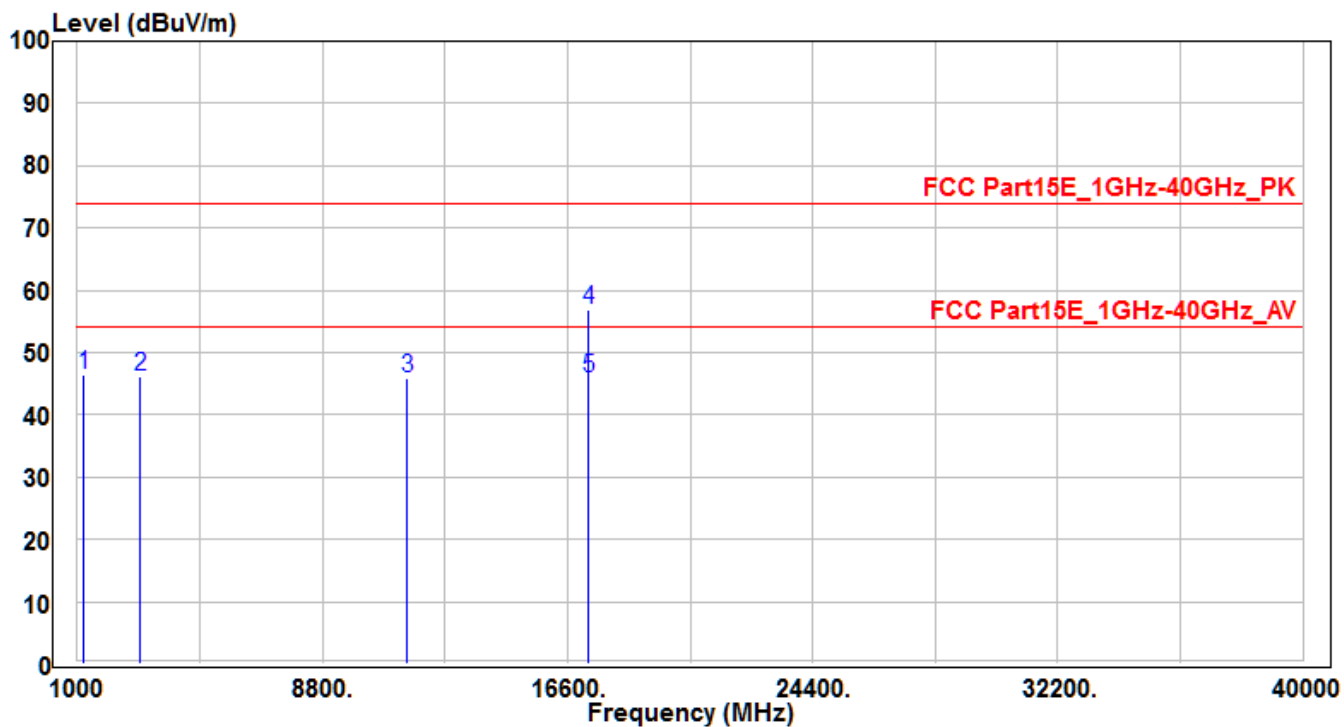


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.95	53.55	-7.07	46.48	-27.52	74	150	400	Peak
2		2997.2	49.16	-2.93	46.23	-27.77	74	150	400	Peak
3		11510	27.46	18.34	45.8	-28.2	74	150	400	Peak
4	*	17265	29.59	27.19	56.78	-17.22	74	190	320	Peak
5	*	17265	18.64	27.19	45.83	-8.17	54	190	320	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH159	Test Voltage	AC 120V/60Hz

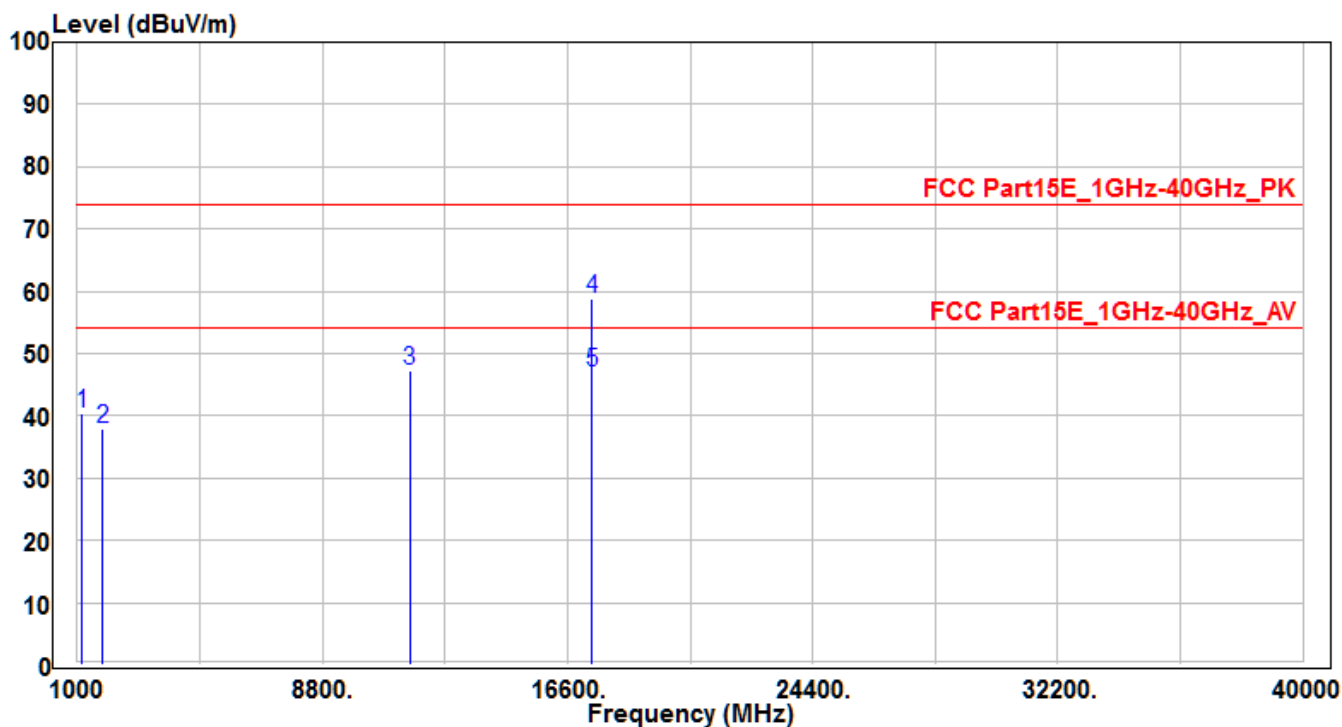


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1152	47.52	-7.18	40.34	-33.66	74	150	400	Peak
2		1798.56	43.23	-5.31	37.92	-36.08	74	150	400	Peak
3		11590	28.97	18.2	47.17	-26.83	74	150	400	Peak
4	*	17385	30.7	28.02	58.72	-15.28	74	185	145	Peak
5	*	17385	18.97	28.02	46.99	-7.01	54	185	145	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
4. The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3 -CH159	Test Voltage	AC 120V/60Hz

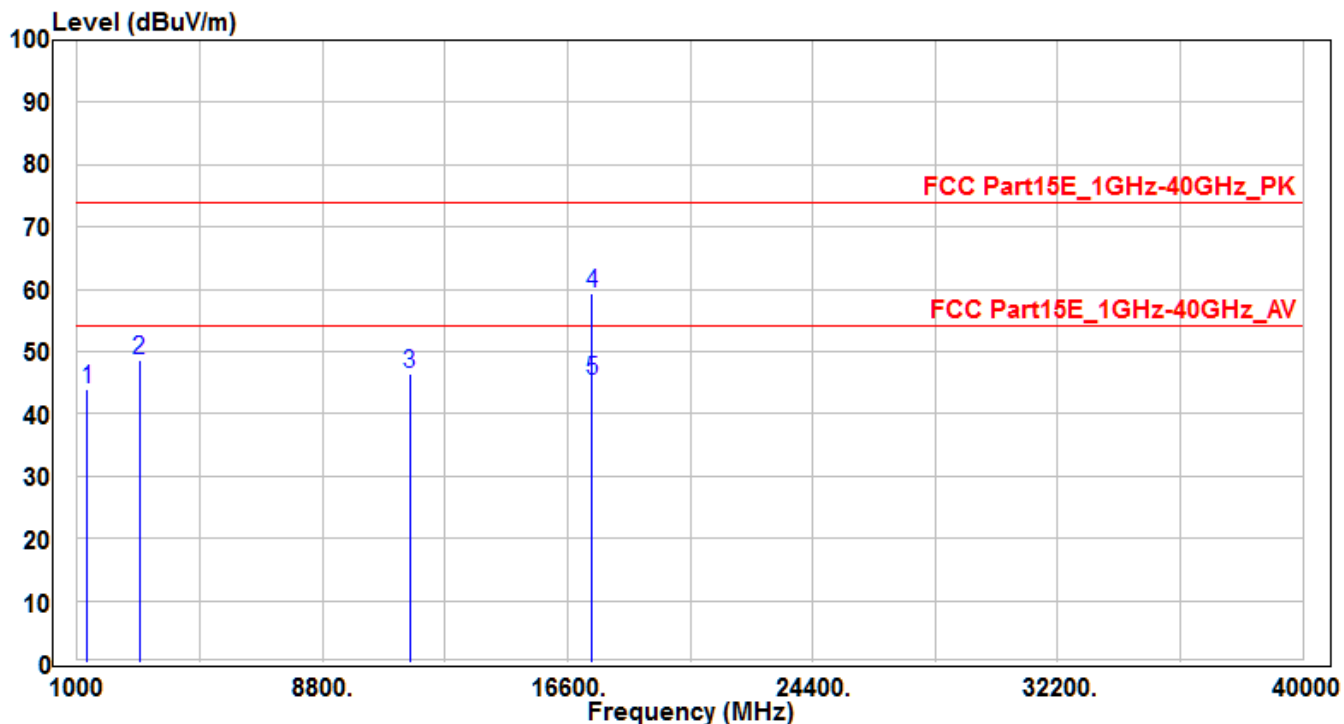

No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1325	50.62	-6.75	43.87	-30.13	74	150	400	Peak
2		2986.96	51.54	-2.91	48.63	-25.37	74	150	400	Peak
3		11590	28.33	18.2	46.53	-27.47	74	150	400	Peak
4	*	17385	31.36	28.02	59.38	-14.62	74	160	320	Peak
5	*	17385	17.46	28.02	45.48	-8.52	54	160	320	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v01r03 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.9.2. Test Result

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH36	Test Voltage	AC 120V/60Hz

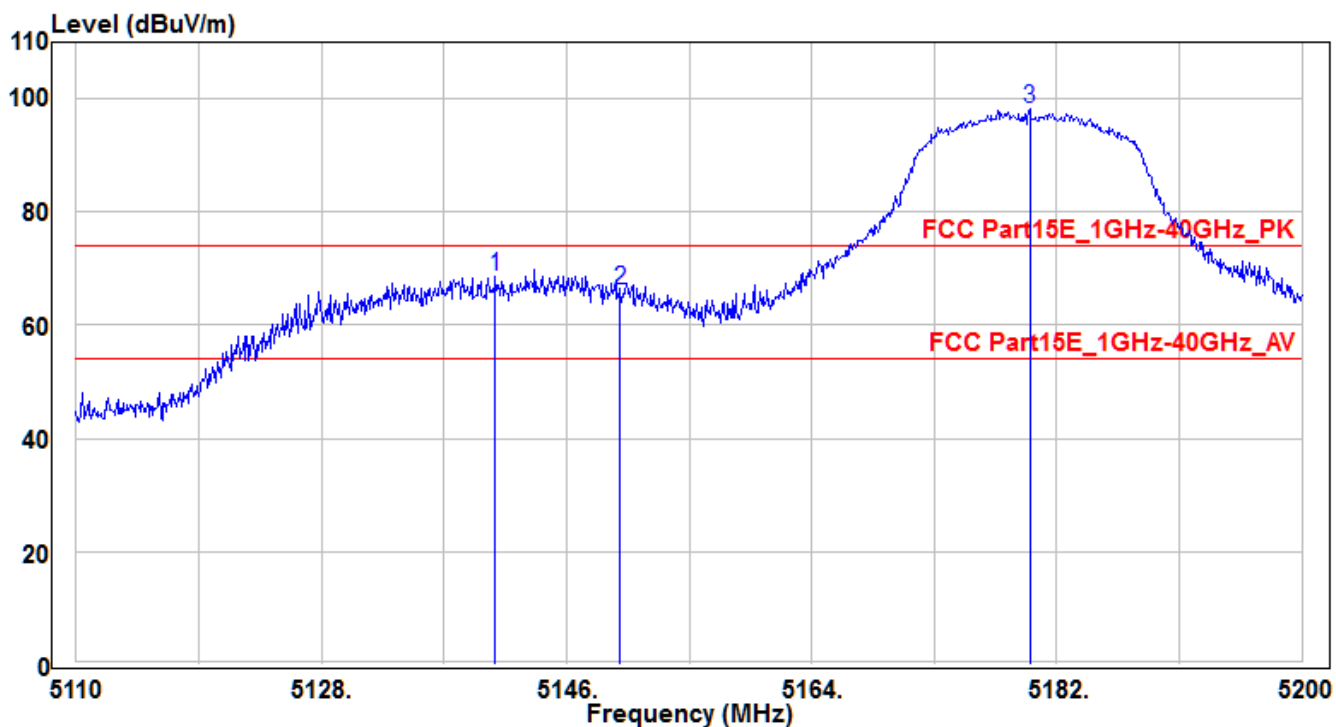


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.78	65.13	3.34	68.47	-5.53	74	150	80	Peak
2		5149.96	62.94	3.36	66.3	-7.7	74	150	80	Peak
3		5180.02	94.7	3.42	98.12	24.12	74	150	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH36	Test Voltage	AC 120V/60Hz

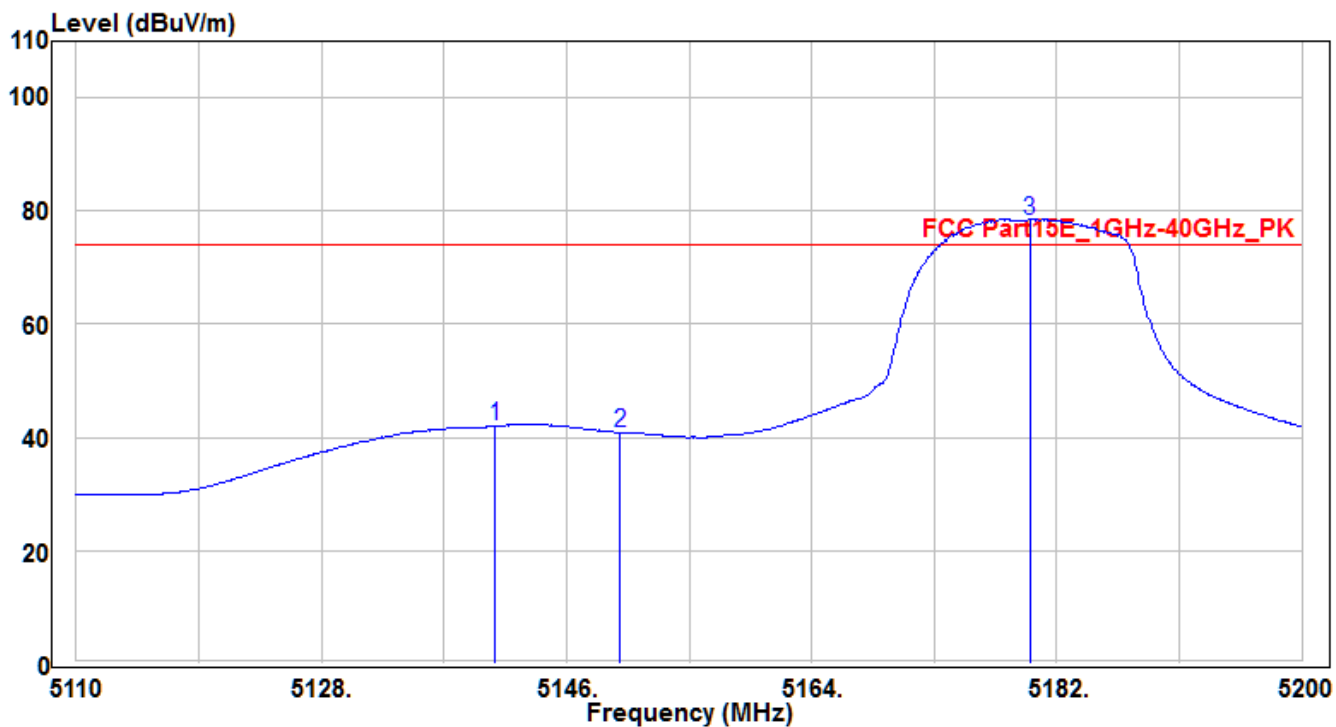


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.78	38.63	3.34	41.97	-32.03	74	150	80	Average
2		5149.96	37.41	3.36	40.77	-33.23	74	150	80	Average
3		5180.02	74.94	3.42	78.36	4.36	74	150	80	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH36	Test Voltage	AC 120V/60Hz

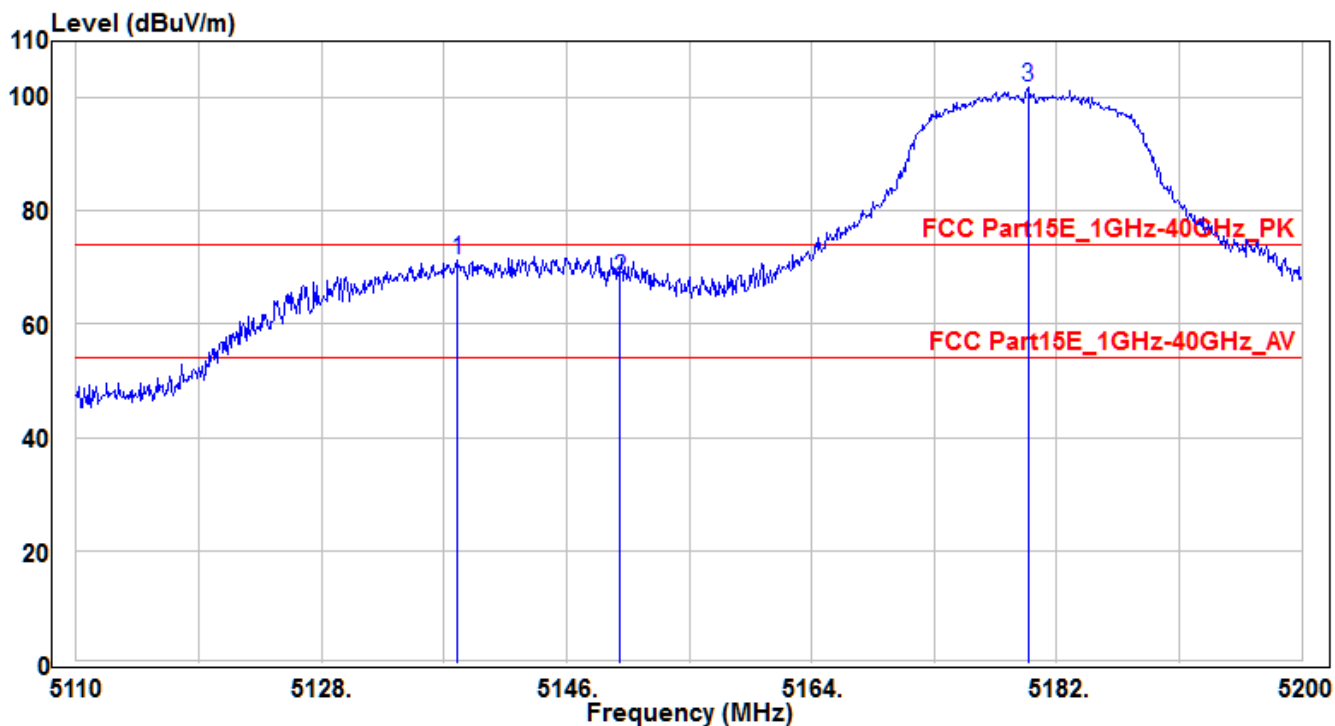


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.99	68.04	3.33	71.37	-2.63	74	175	120	Peak
2		5149.96	64.5	3.36	67.86	-6.14	74	175	120	Peak
3		5179.93	98.35	3.42	101.77	27.77	74	175	120	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH36	Test Voltage	AC 120V/60Hz

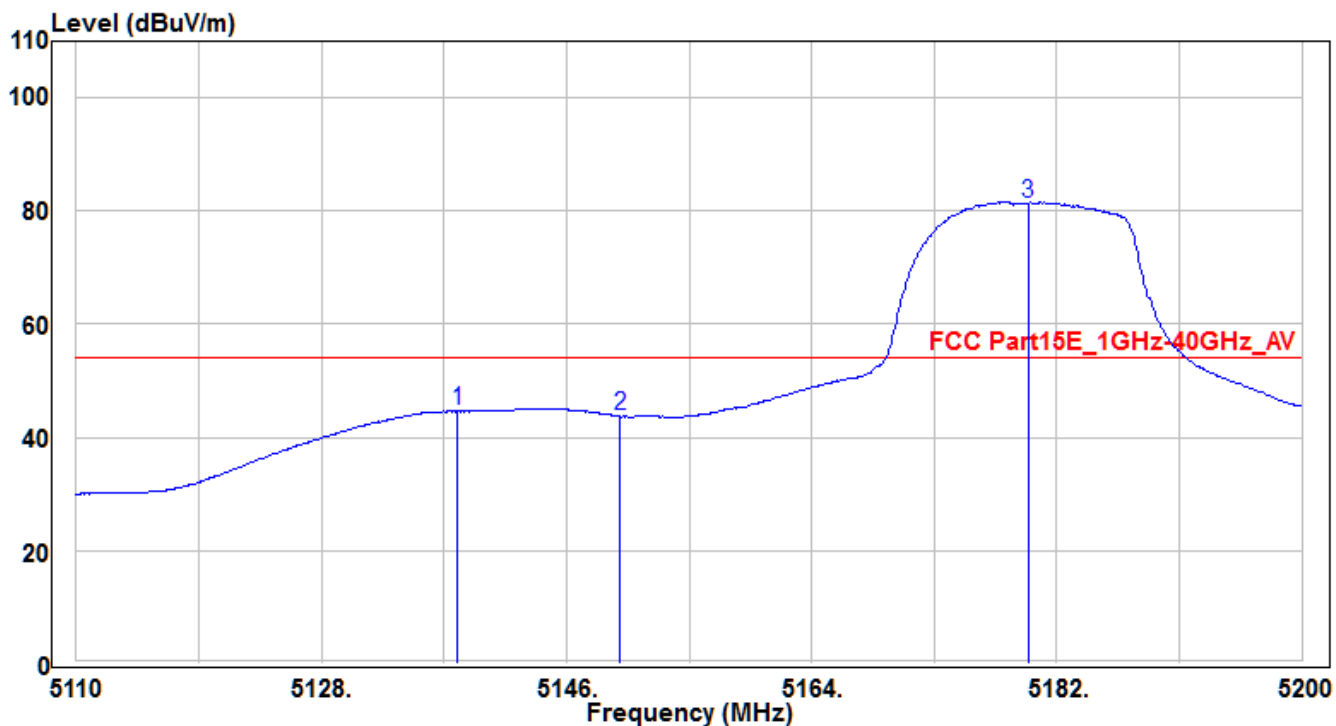


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.99	41.27	3.33	44.6	-9.4	54	175	120	Average
2		5149.96	40.38	3.36	43.74	-10.26	54	175	120	Average
3		5179.93	78.03	3.42	81.45	27.45	54	175	120	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH64	Test Voltage	AC 120V/60Hz

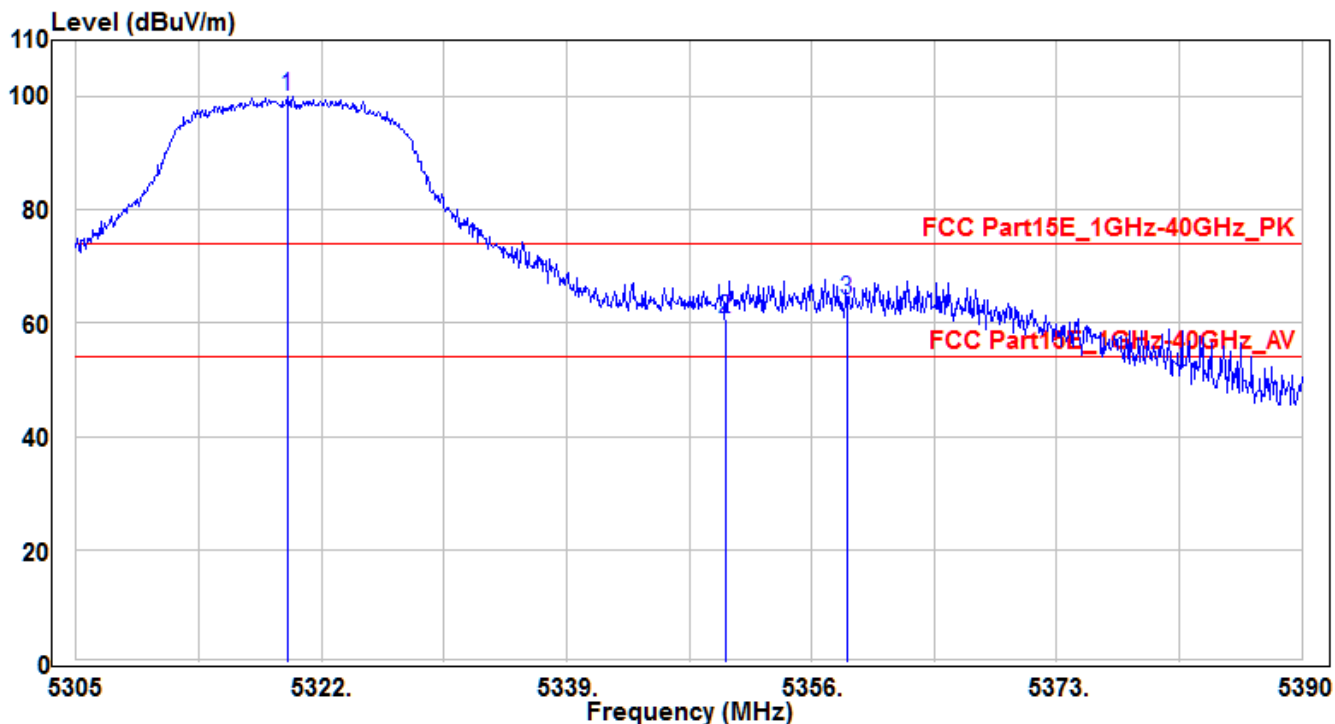


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.62	96.36	3.7	100.06	26.06	74	165	80	Peak
2	5350	57.14	3.76	60.9	-13.1	74	165	80	Peak
3	* 5358.465	60.24	3.78	64.02	-9.98	74	165	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH64	Test Voltage	AC 120V/60Hz

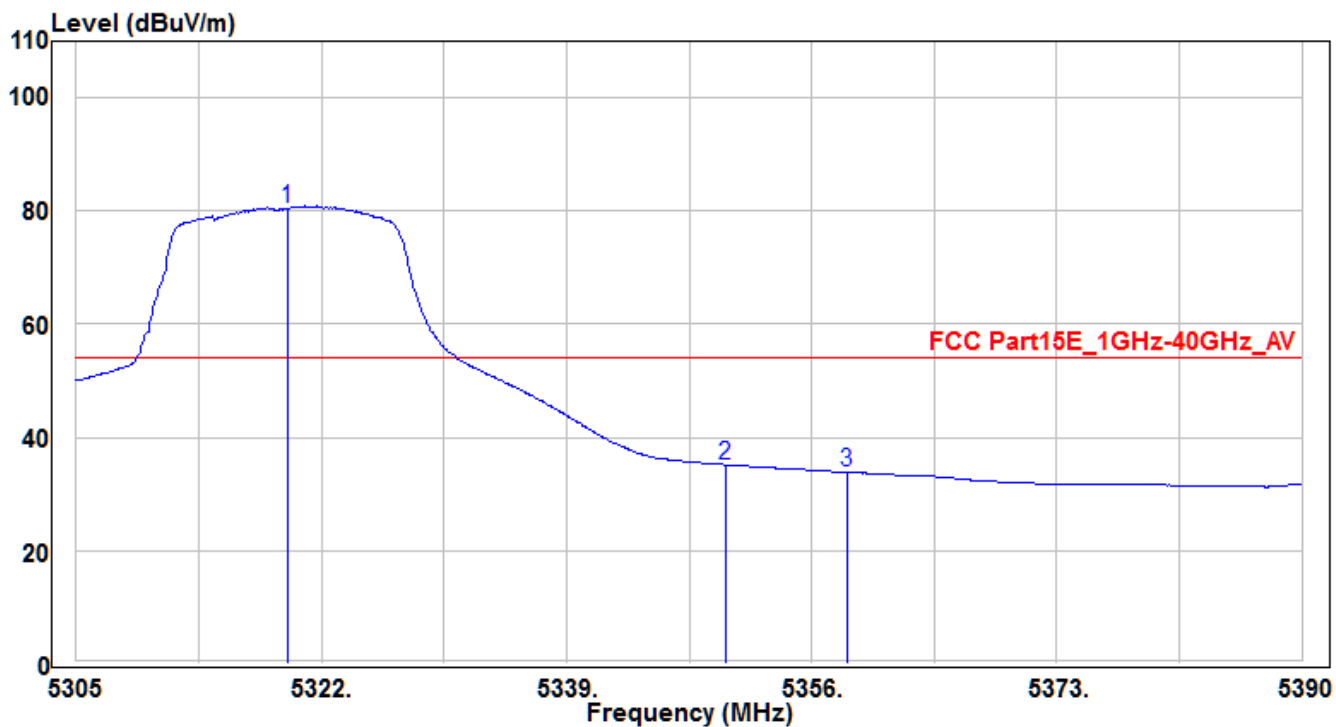


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.62	76.59	3.7	80.29	26.29	54	165	80	Average
2	*	5350	31.43	3.76	35.19	-18.81	54	165	80	Average
3		5358.465	30.03	3.78	33.81	-20.19	54	165	80	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH64	Test Voltage	AC 120V/60Hz

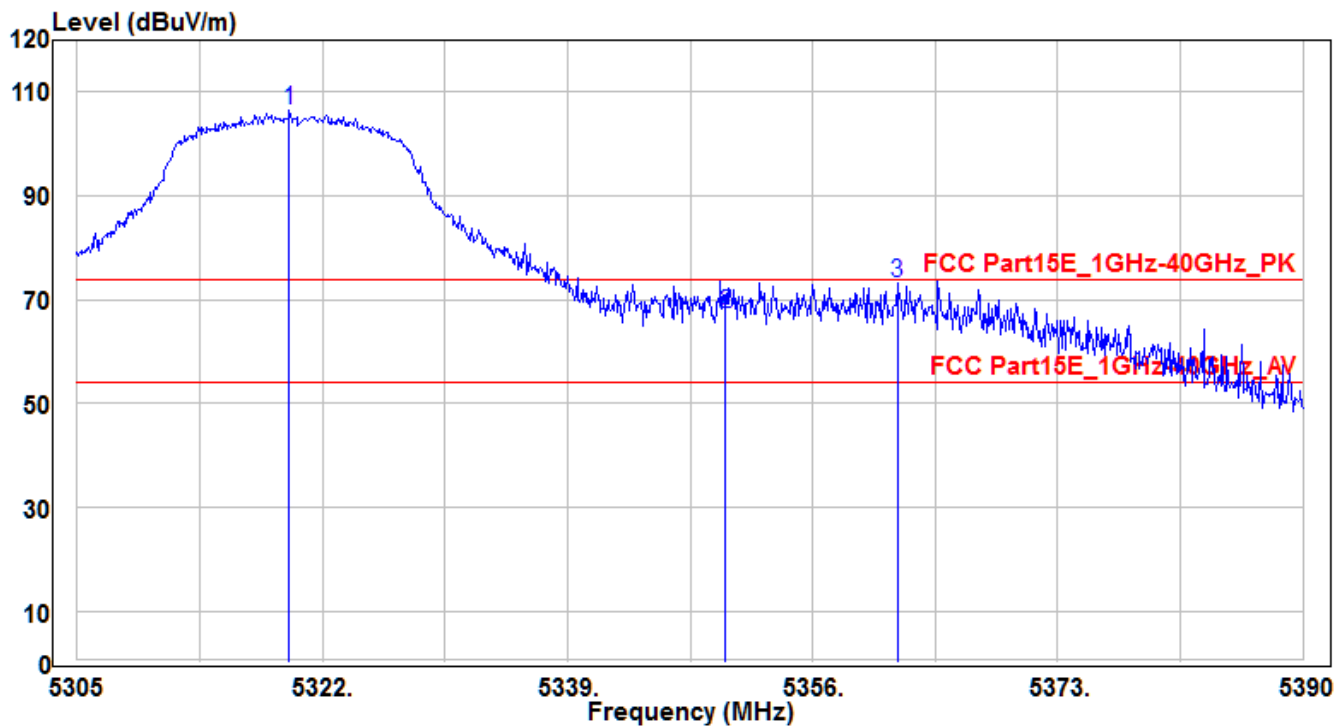


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.705	102.64	3.7	106.34	32.34	74	175	115	Peak
2	5349.965	63.61	3.76	67.37	-6.63	74	175	115	Peak
3	* 5361.865	69.34	3.79	73.13	-0.87	74	175	115	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH64	Test Voltage	AC 120V/60Hz

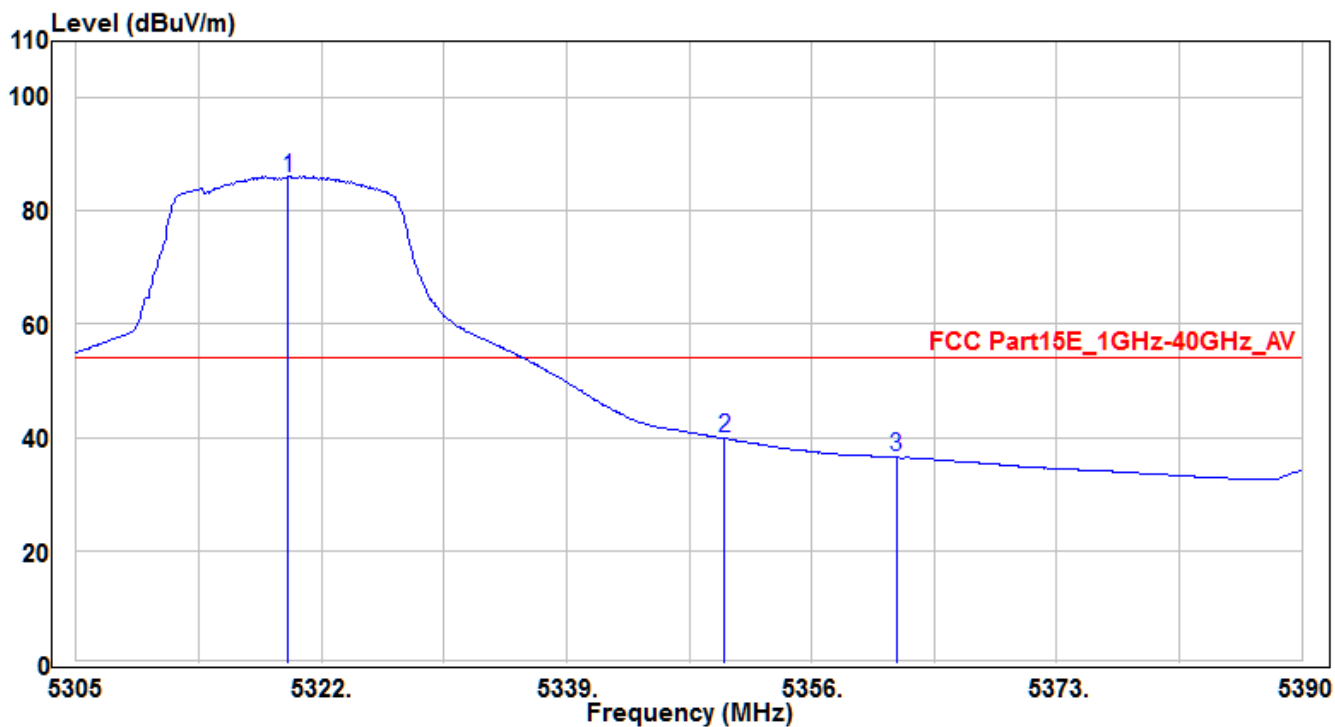


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.705	82.16	3.7	85.86	31.86	54	175	115	Average
2	*	5349.965	36.1	3.76	39.86	-14.14	54	175	115	Average
3		5361.865	32.68	3.79	36.47	-17.53	54	175	115	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH100	Test Voltage	AC 120V/60Hz

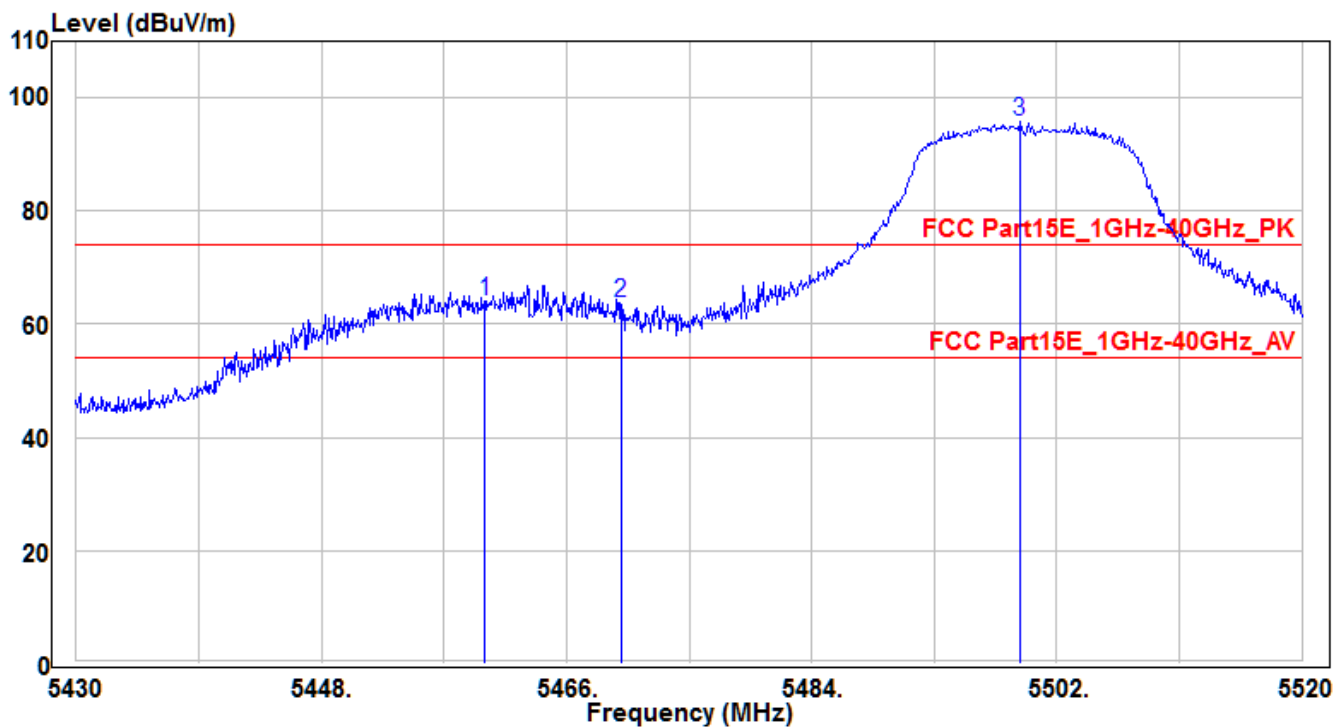


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5460	59.95	4	63.95	-10.05	74	150	95	Peak
2		5470	59.8	4	63.8	-10.2	74	150	95	Peak
3		5499.3	91.71	4.07	95.78	21.78	74	150	95	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH100	Test Voltage	AC 120V/60Hz

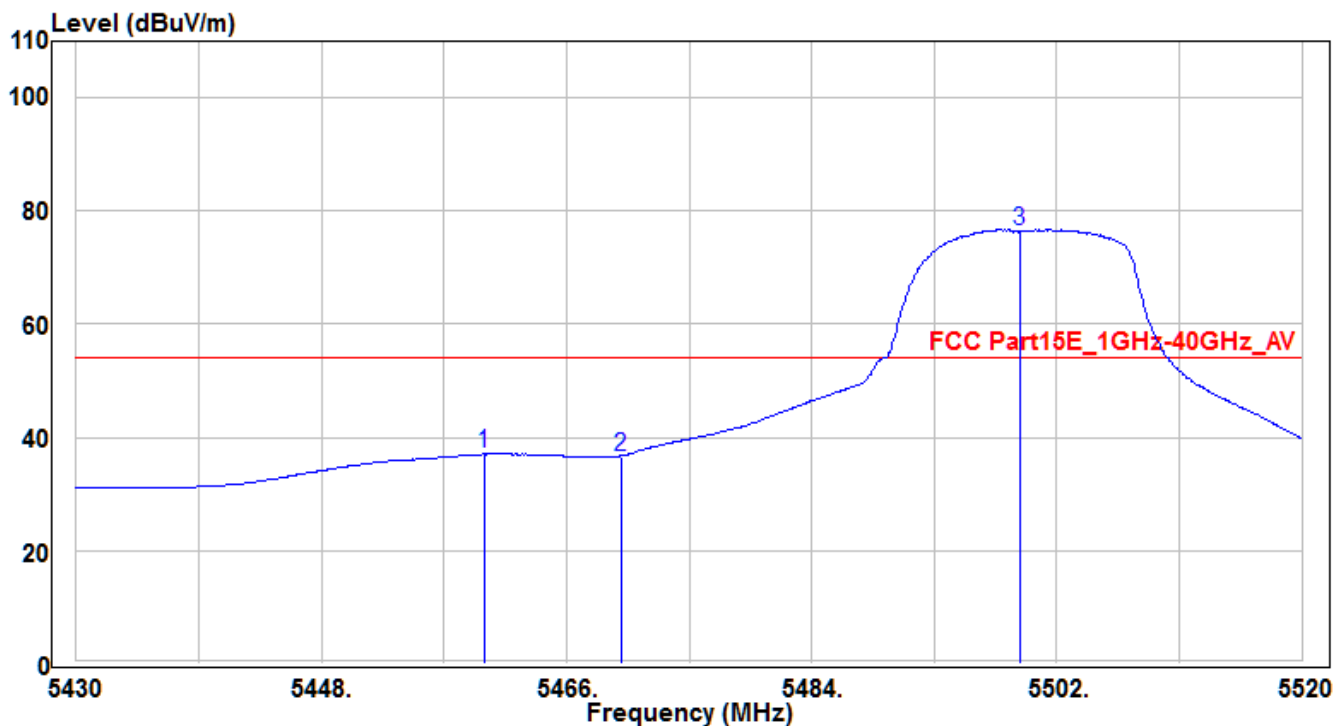


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.97	33.04	4	37.04	-16.96	54	150	95	Average
2		5470	32.72	4	36.72	-17.28	54	150	95	Average
3		5499.3	72.29	4.07	76.36	22.36	54	150	95	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH100	Test Voltage	AC 120V/60Hz

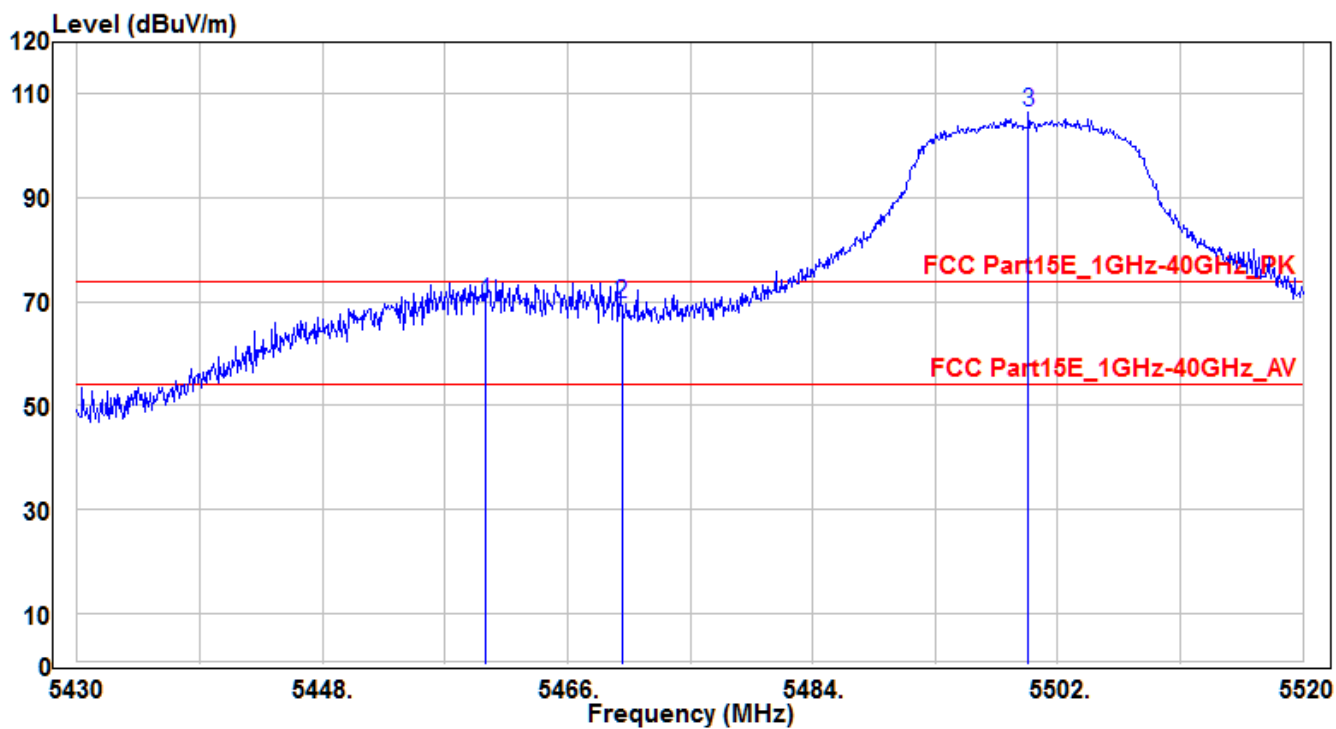


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5460	65.89	4	69.89	-4.11	74	180	130	Peak
2		5470	65.6	4	69.6	-4.4	74	180	130	Peak
3		5499.84	102.36	4.07	106.43	32.43	74	180	130	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH100	Test Voltage	AC 120V/60Hz

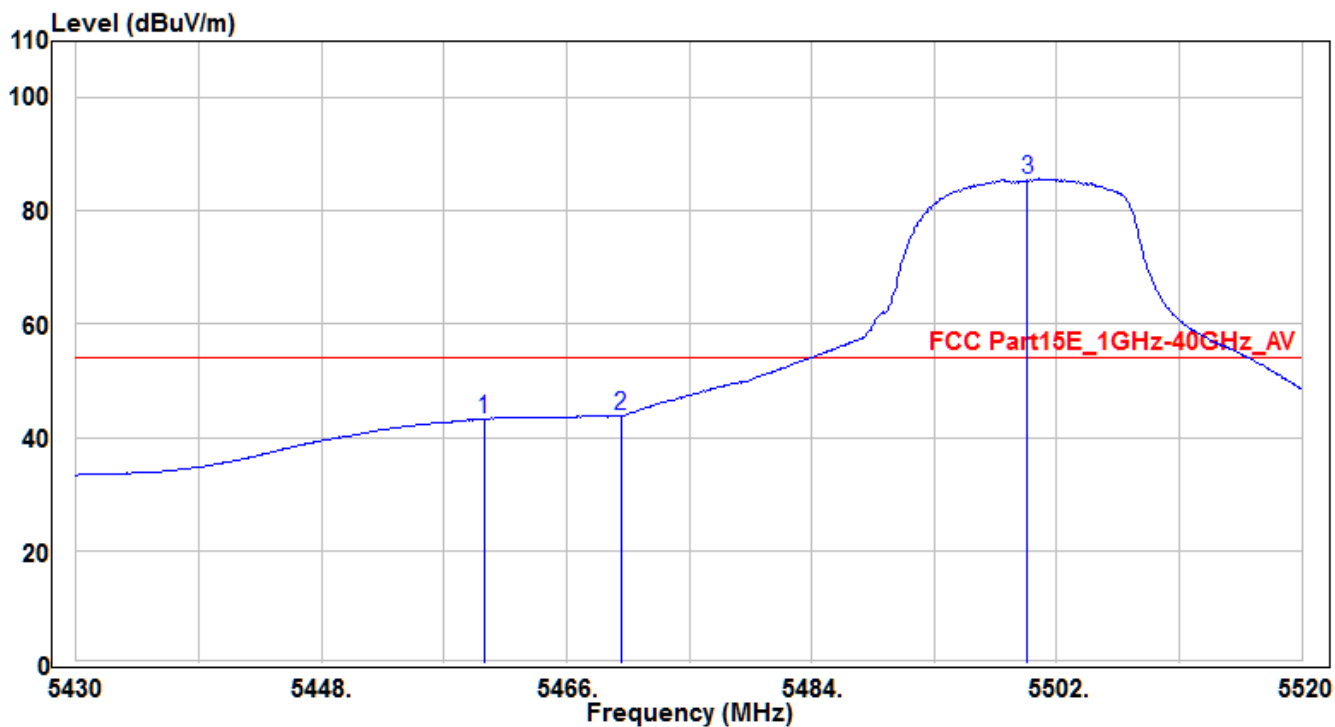


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5460	39.26	4	43.26	-10.74	54	180	130	Average
2	*	5470	39.81	4	43.81	-10.19	54	180	130	Average
3		5499.84	81.42	4.07	85.49	31.49	54	180	130	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH140	Test Voltage	AC 120V/60Hz

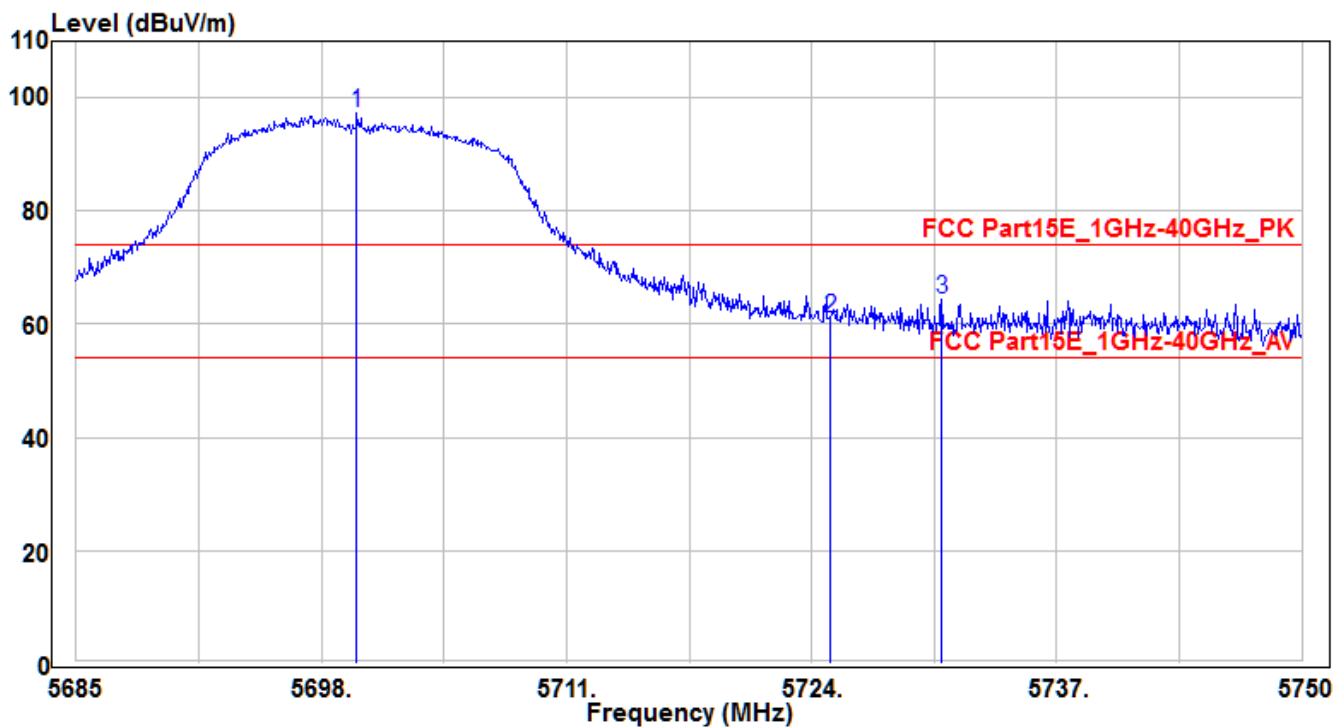


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.885	92.38	4.84	97.22	23.22	74	150	120	Peak
2	5725	56.06	4.93	60.99	-13.01	74	150	120	Peak
3	* 5730.89	59.33	4.95	64.28	-9.72	74	150	120	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH140	Test Voltage	AC 120V/60Hz

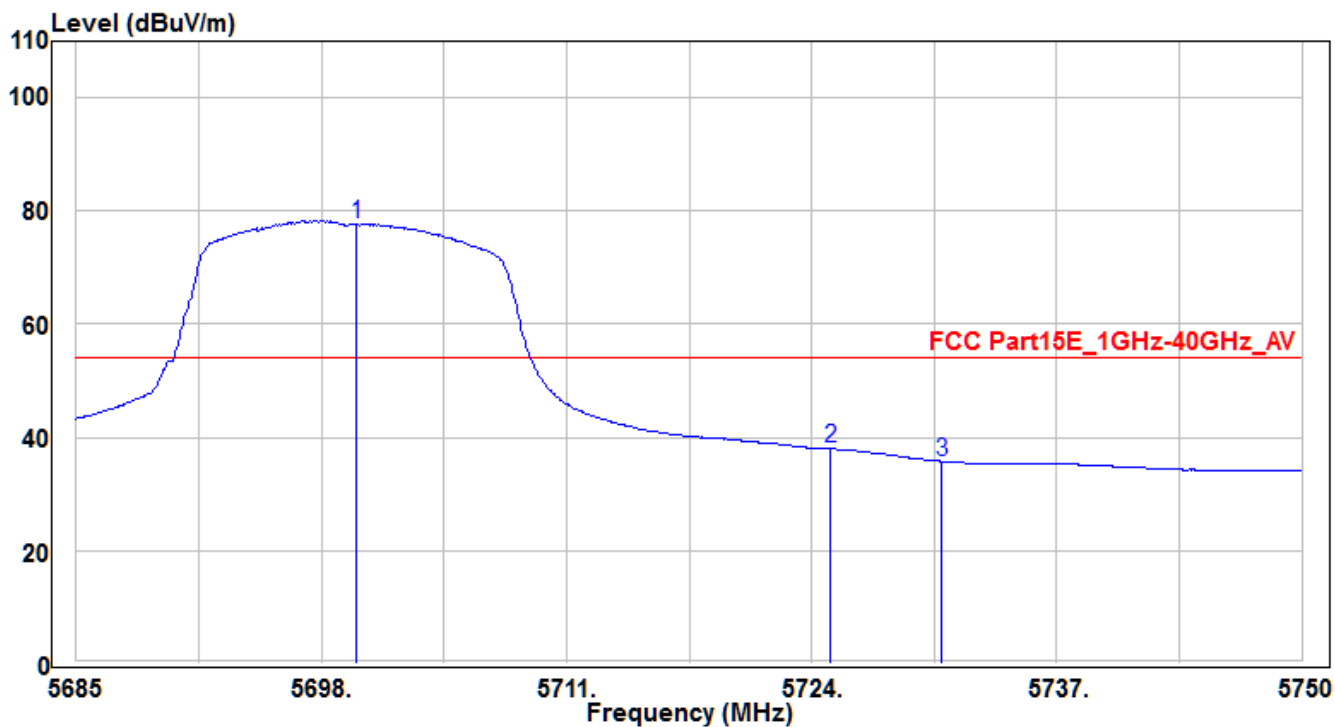


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.885	72.76	4.84	77.6	23.6	54	150	120	Average
2	5725	33.1	4.93	38.03	-15.97	54	150	120	Average
3	* 5730.89	30.84	4.95	35.79	-18.21	54	150	120	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH140	Test Voltage	AC 120V/60Hz

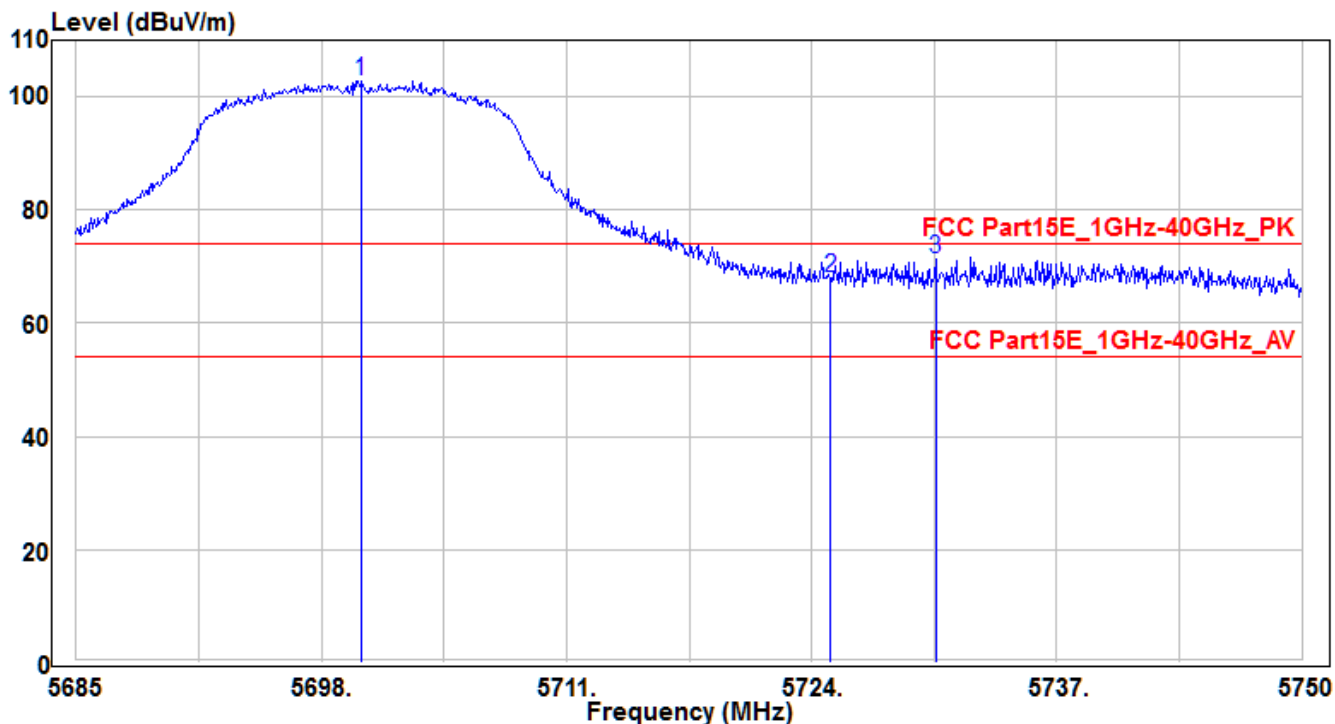


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.08	98.03	4.84	102.87	28.87	74	160	165	Peak
2	5725	63.18	4.93	68.11	-5.89	74	160	165	Peak
3	* 5730.565	66.26	4.95	71.21	-2.79	74	160	165	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH140	Test Voltage	AC 120V/60Hz

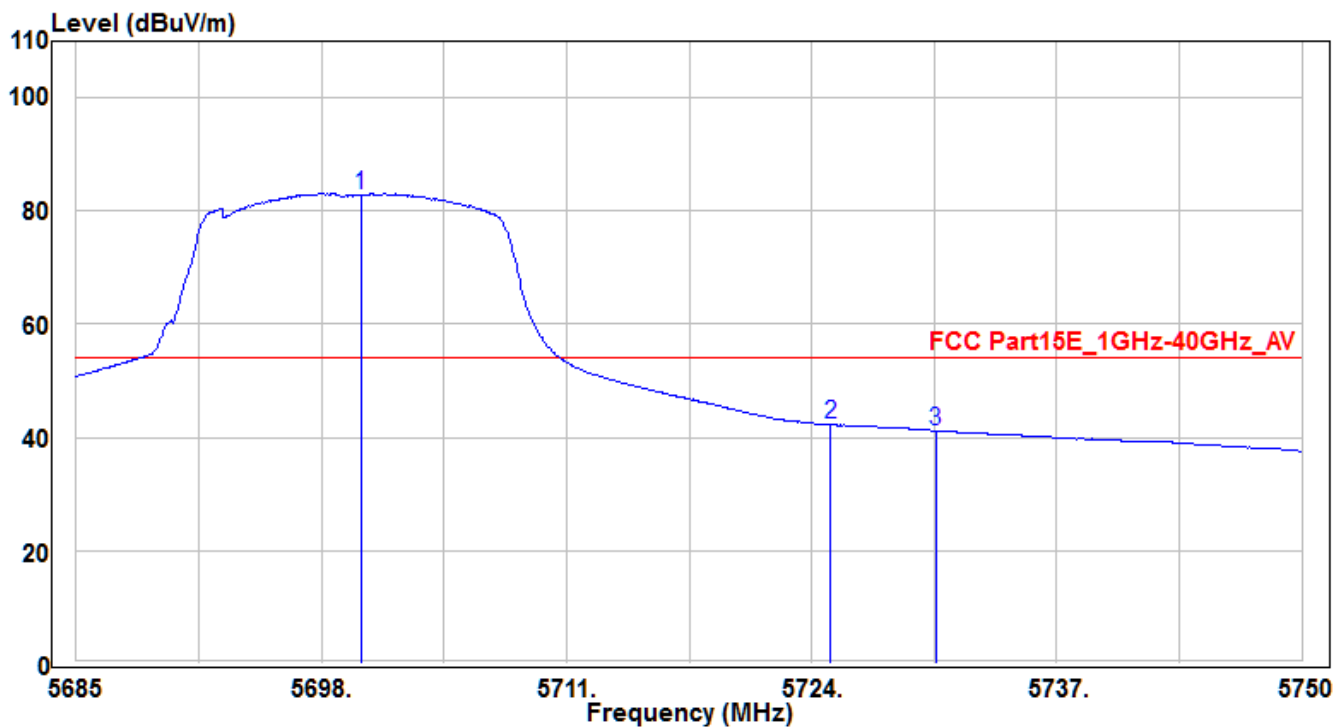


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.08	78.07	4.84	82.91	28.91	54	160	165	Average
2	* 5725	37.35	4.93	42.28	-11.72	54	160	165	Average
3	5730.565	36.23	4.95	41.18	-12.82	54	160	165	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH149	Test Voltage	AC 120V/60Hz

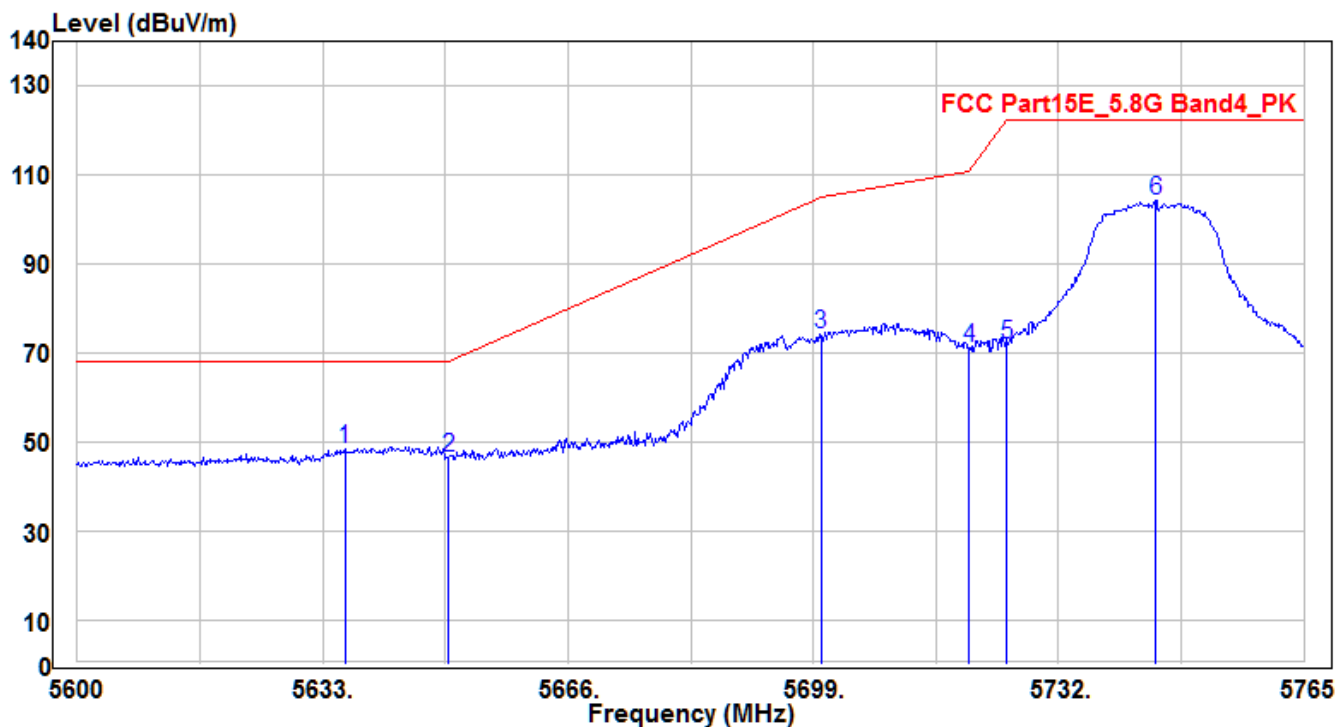


No		Frequency (MHz)	Reading (dBUV/m)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.97	43.74	4.59	48.33	-19.87	68.2	155	80	Peak
2		5650	41.72	4.65	46.37	-21.83	68.2	155	80	Peak
3		5700	69.37	4.84	74.21	-30.99	105.2	155	80	Peak
4		5720	66.3	4.91	71.21	-39.59	110.8	155	80	Peak
5		5725	66.85	4.93	71.78	-50.42	122.2	155	80	Peak
6		5745.035	99.41	5.01	104.42	-17.78	122.2	155	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBUV/m) = Reading(dBUV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH149	Test Voltage	AC 120V/60Hz

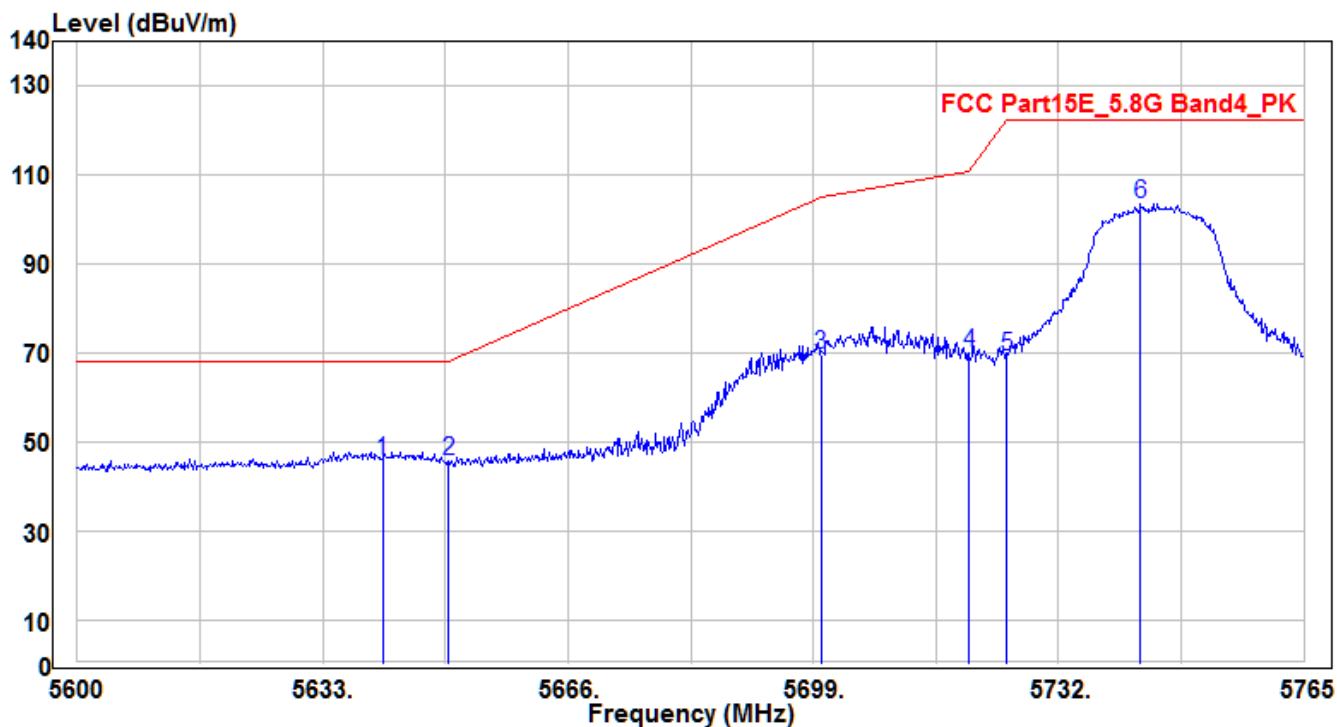


No	Frequency (MHz)	Reading (dBUV/m)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5641.085	41.33	4.62	45.95	-22.25	68.2	150	165	Peak
2	5649.995	40.95	4.65	45.6	-22.6	68.2	150	165	Peak
3	5700	64.92	4.84	69.76	-35.44	105.2	150	165	Peak
4	5720	65.28	4.91	70.19	-40.61	110.8	150	165	Peak
5	5725	64.38	4.93	69.31	-52.89	122.2	150	165	Peak
6	* 5743.055	98.46	5	103.46	-18.74	122.2	150	165	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBUV/m) = Reading(dBUV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH165	Test Voltage	AC 120V/60Hz

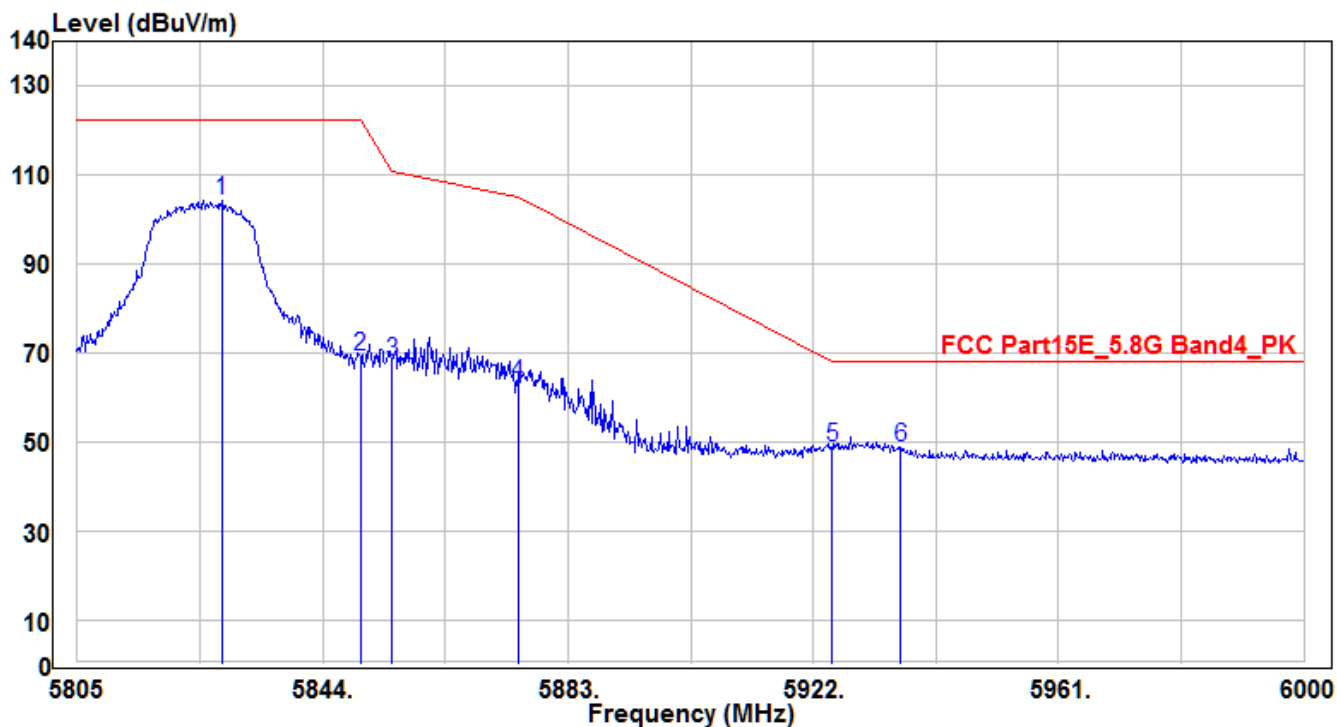


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5828.01	98.97	5.33	104.3	-17.9	122.2	150	80	Peak
2		5850	64.03	5.41	69.44	-52.76	122.2	150	80	Peak
3		5855	62.67	5.44	68.11	-42.69	110.8	150	80	Peak
4		5875	57.44	5.51	62.95	-42.25	105.2	150	80	Peak
5		5925	43.2	5.7	48.9	-19.3	68.2	150	80	Peak
6		5935.845	43.18	5.75	48.93	-19.27	68.2	150	80	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1-CH165	Test Voltage	AC 120V/60Hz

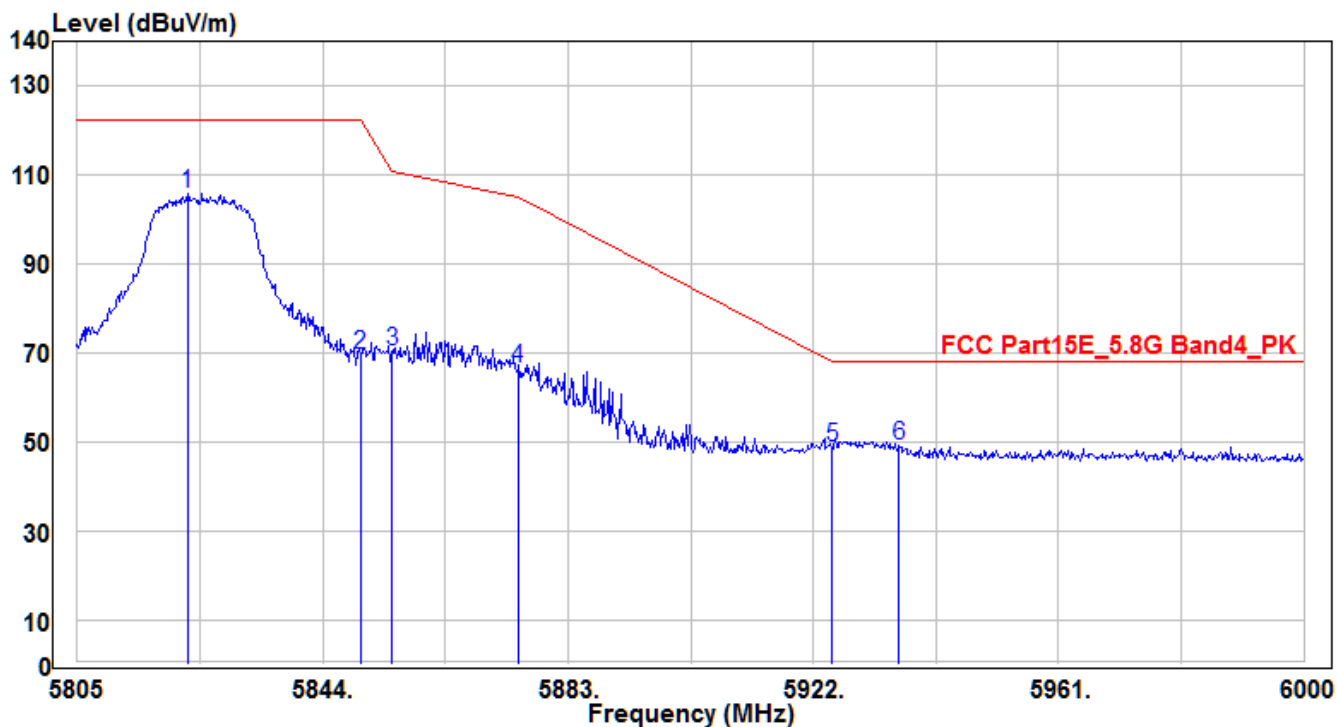


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5824.695	99.75	5.31	105.06	-17.14	122.2	185	120	Peak
2		5850	67.09	5.41	72.5	-49.7	122.2	185	120	Peak
3		5855	63.71	5.44	69.15	-41.65	110.8	185	120	Peak
4		5875	61.68	5.51	67.19	-38.01	105.2	185	120	Peak
5		5924.925	44.02	5.7	49.72	-18.54	68.26	185	120	Peak
6		5939.355	42.41	5.76	48.17	-20.03	68.2	185	120	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH36	Test Voltage	AC 120V/60Hz

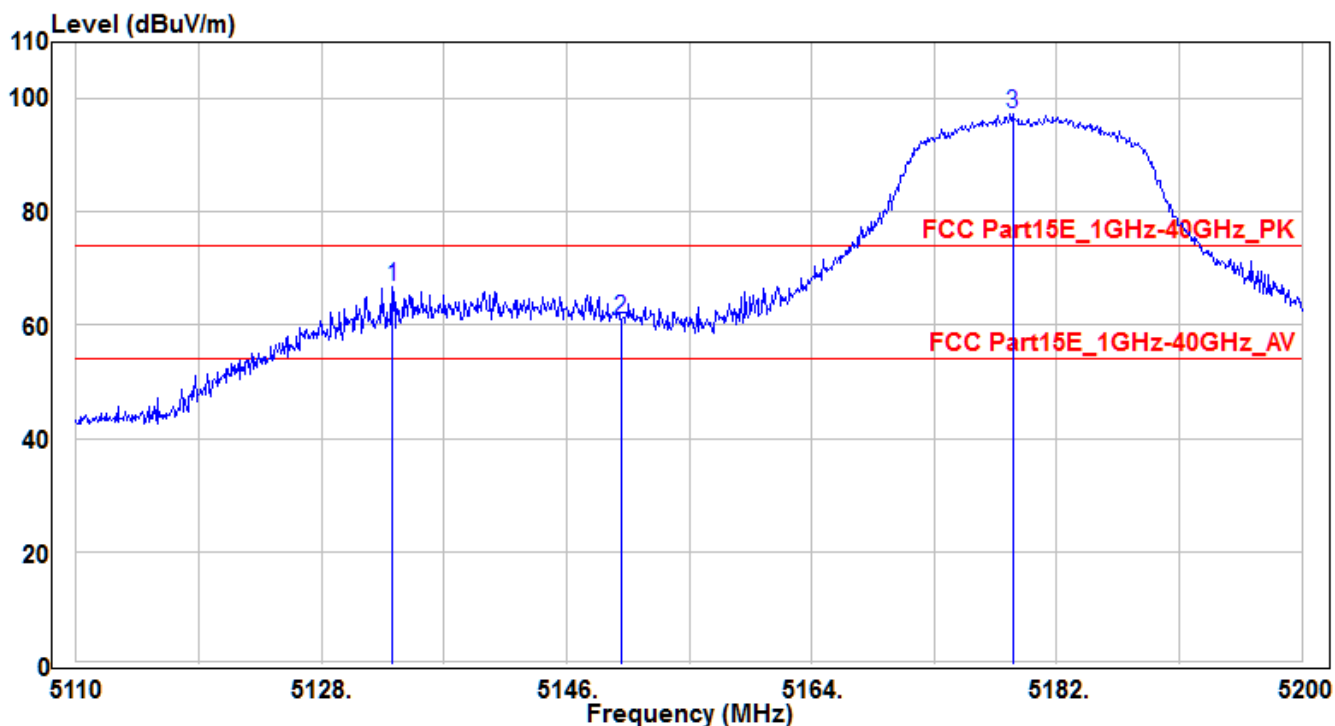


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5133.22	63.41	3.32	66.73	-7.27	74	150	75	Peak
2		5150	57.78	3.36	61.14	-12.86	74	150	75	Peak
3		5178.76	93.94	3.42	97.36	23.36	74	150	75	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH36_	Test Voltage	AC 120V/60Hz

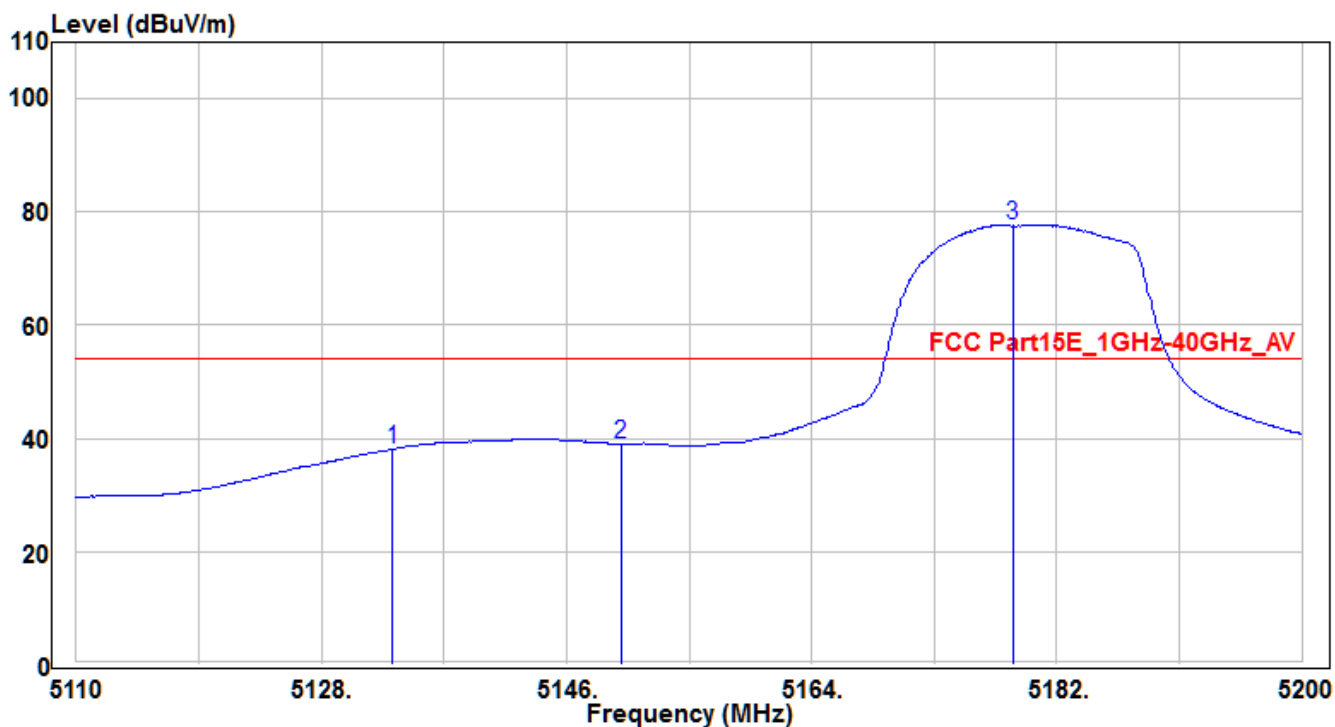


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5133.22	34.78	3.32	38.1	-15.9	54	150	75	Average
2	*	5150	35.67	3.36	39.03	-14.97	54	150	75	Average
3		5178.76	74.14	3.42	77.56	23.56	54	150	75	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH36	Test Voltage	AC 120V/60Hz

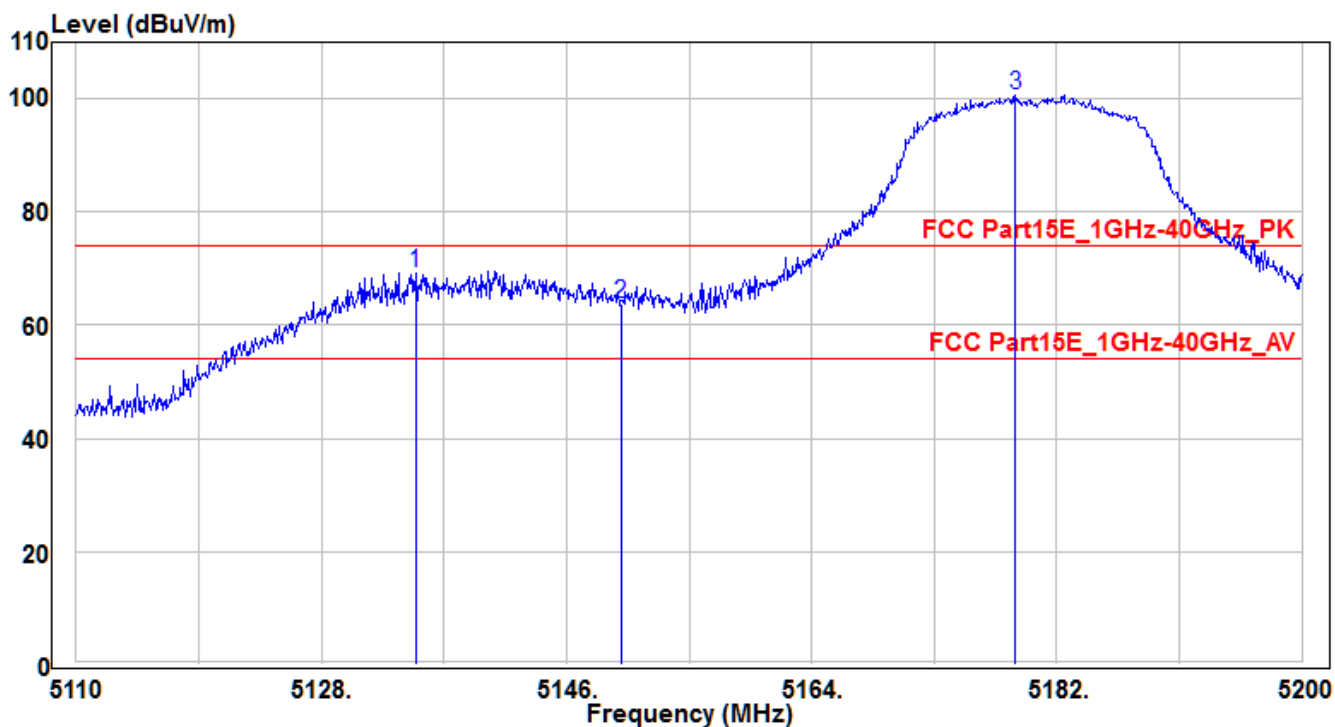


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.93	65.93	3.33	69.26	-4.74	74	200	115	Peak
2		5150	60.54	3.36	63.9	-10.1	74	200	115	Peak
3		5178.94	97.33	3.42	100.75	26.75	74	200	115	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH36	Test Voltage	AC 120V/60Hz

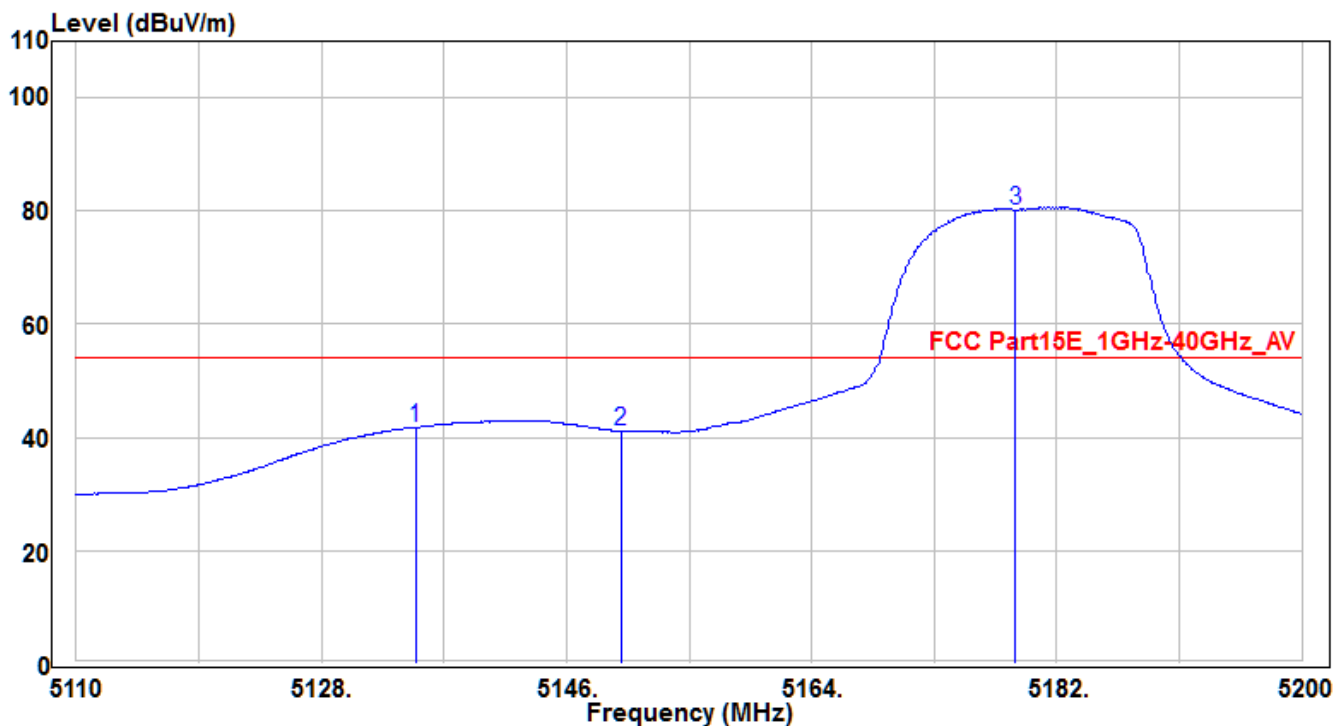


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.93	38.45	3.33	41.78	-12.22	54	200	115	Average
2		5150	37.8	3.36	41.16	-12.84	54	200	115	Average
3		5178.94	76.76	3.42	80.18	26.18	54	200	115	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH64	Test Voltage	AC 120V/60Hz

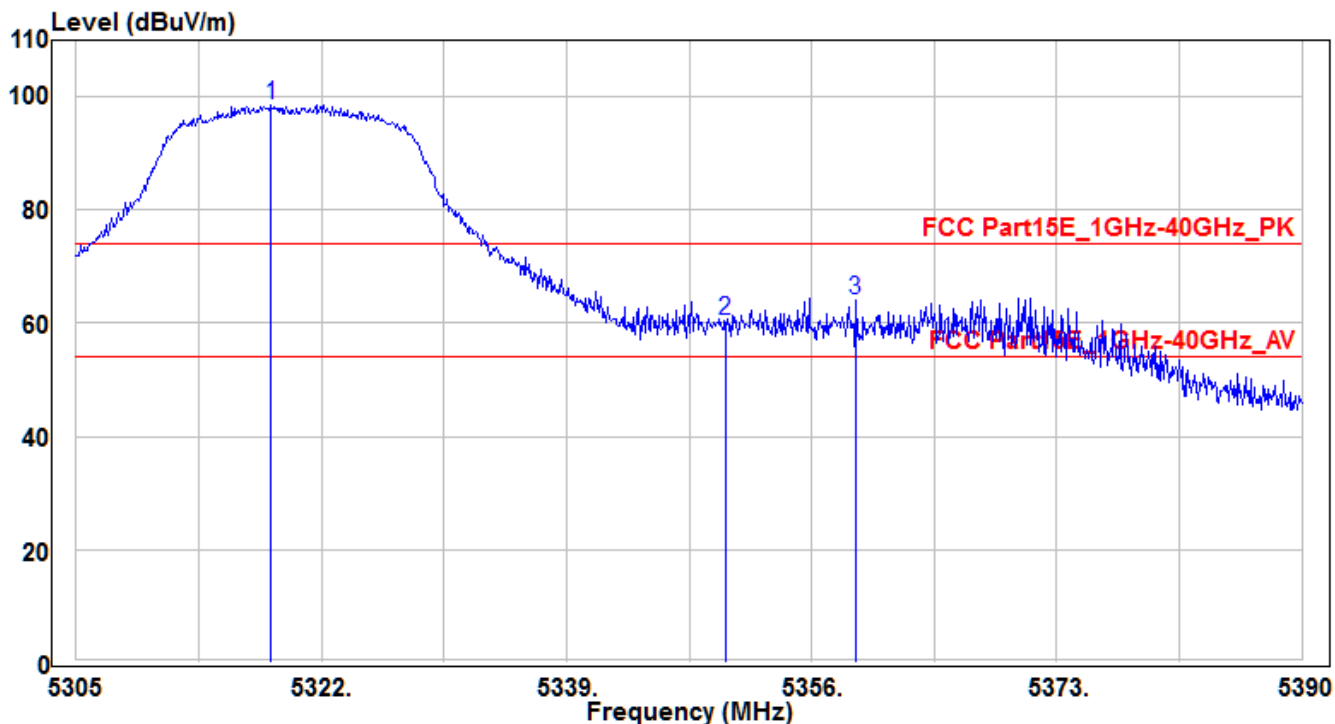


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	94.97	3.7	98.67	24.67	74	170	80	Peak
2	5350	56.69	3.76	60.45	-13.55	74	170	80	Peak
3	* 5359.06	60.2	3.78	63.98	-10.02	74	170	80	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH64	Test Voltage	AC 120V/60Hz

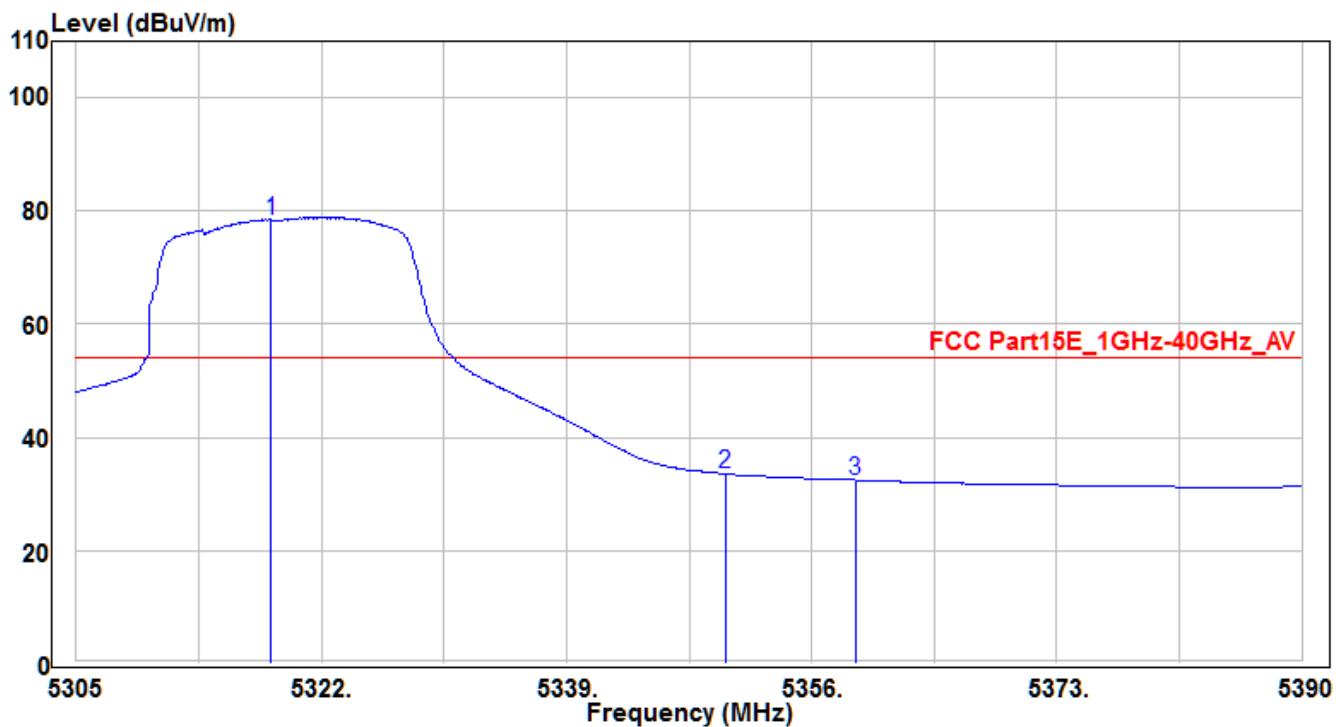


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.515	74.63	3.7	78.33	24.33	54	170	80	Average
2	*	5350	29.83	3.76	33.59	-20.41	54	170	80	Average
3		5359.06	28.71	3.78	32.49	-21.51	54	170	80	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH64	Test Voltage	AC 120V/60Hz

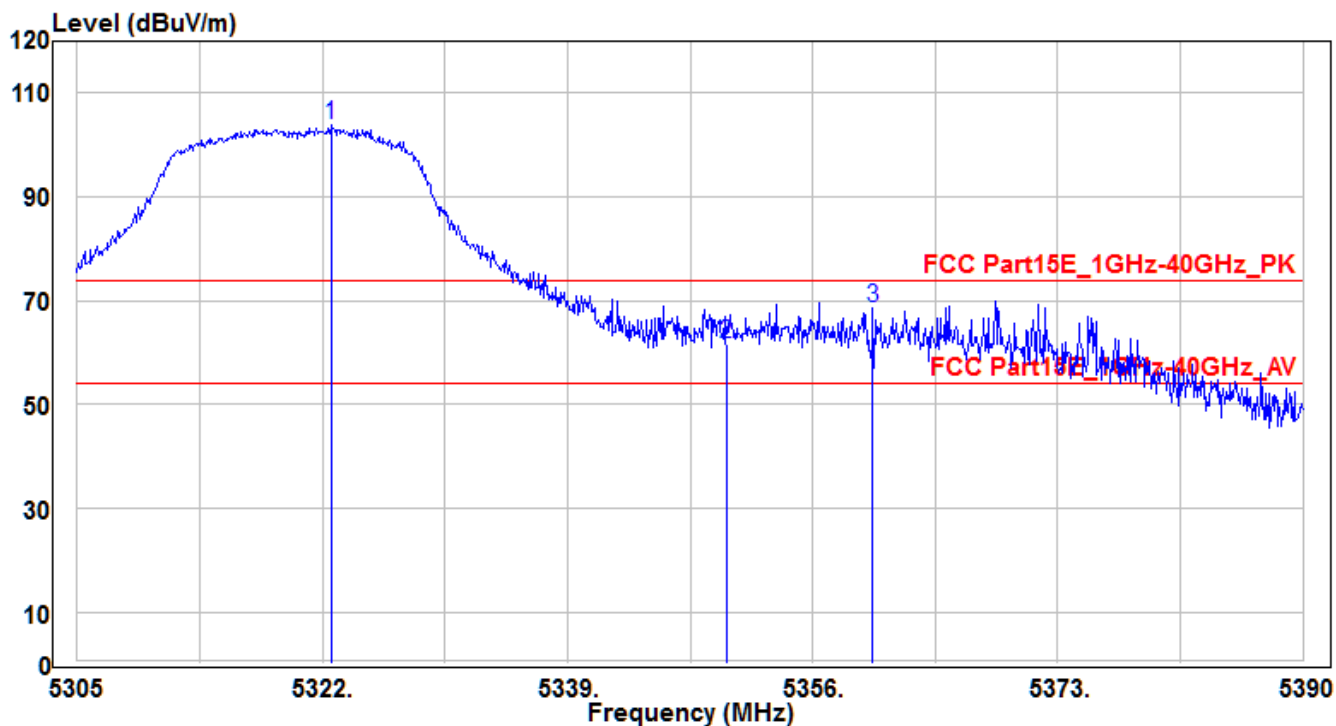


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.595	100.01	3.71	103.72	29.72	74	200	120	Peak
2	5350	57.87	3.76	61.63	-12.37	74	200	120	Peak
3	* 5360.165	64.77	3.79	68.56	-5.44	74	200	120	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH64	Test Voltage	AC 120V/60Hz

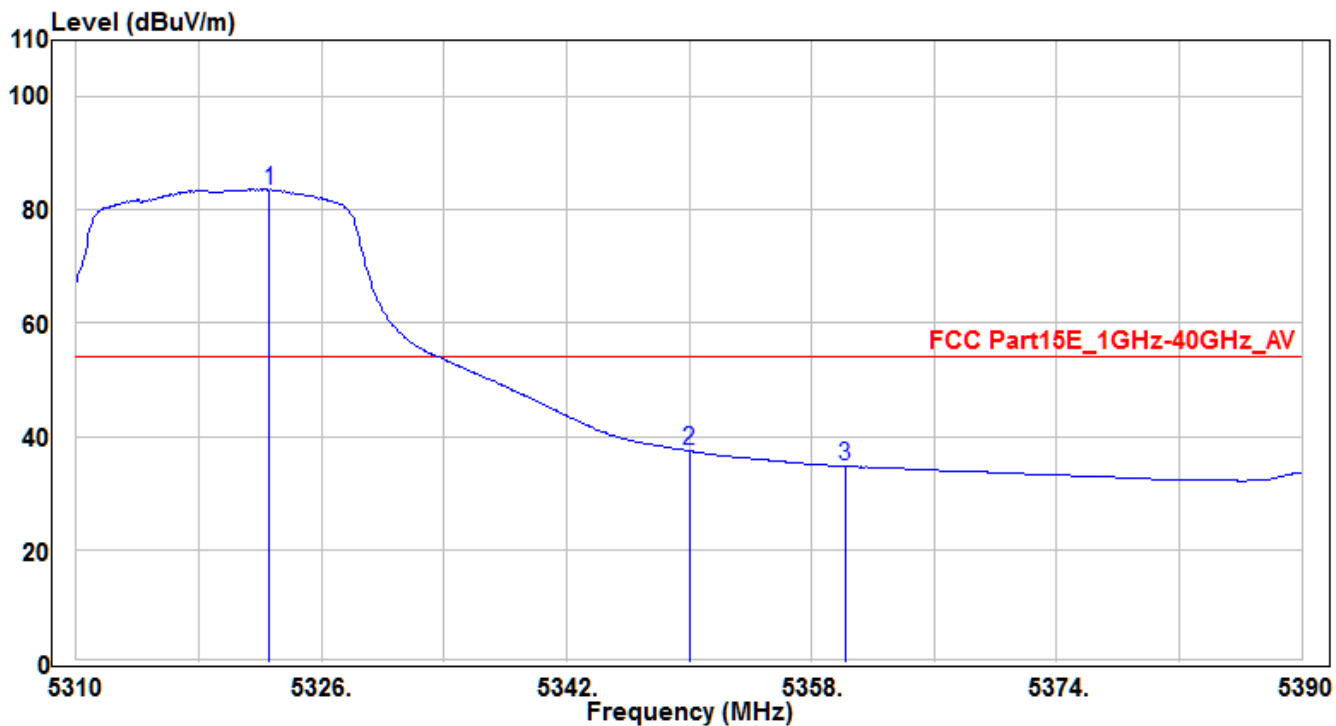


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5322.595	79.74	3.71	83.45	29.45	54	200	120	Average
2	*	5350	33.71	3.76	37.47	-16.53	54	200	120	Average
3		5360.165	30.93	3.79	34.72	-19.28	54	200	120	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH100	Test Voltage	AC 120V/60Hz

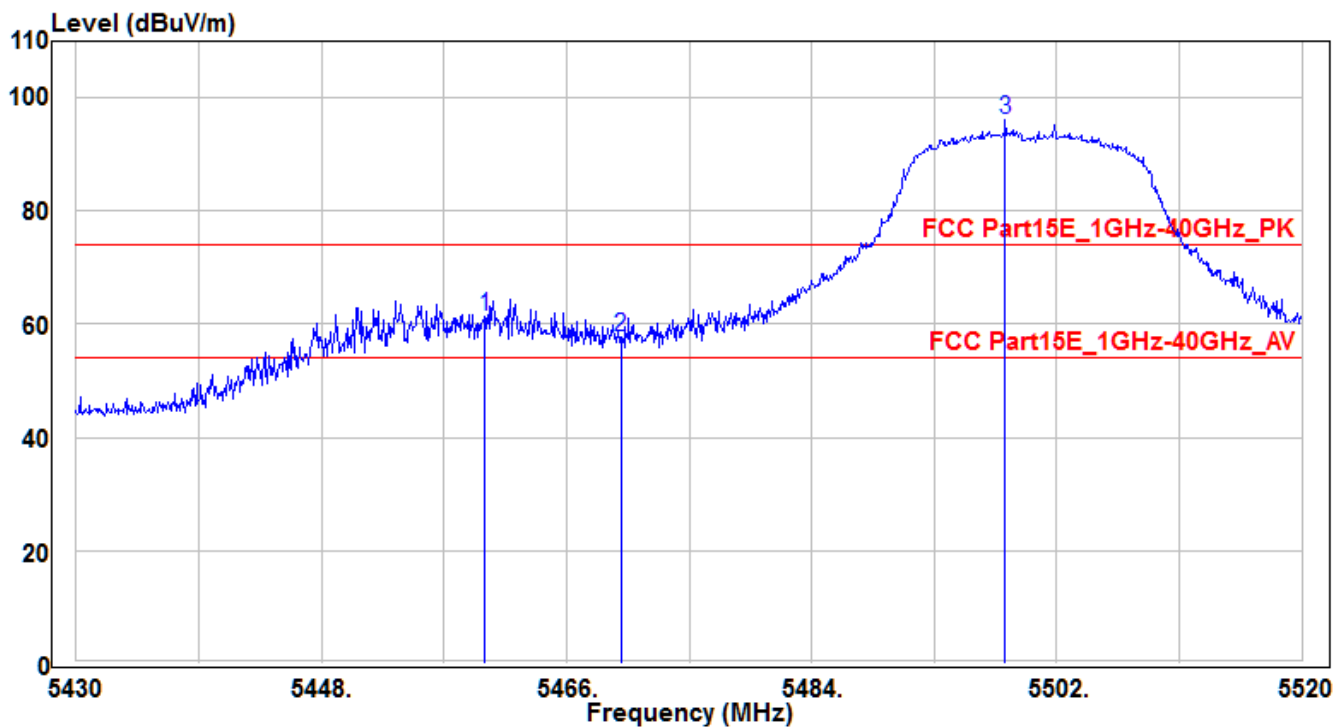


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5460	57.33	4	61.33	-12.67	74	150	90	Peak
2		5470	53.63	4	57.63	-16.37	74	150	90	Peak
3		5498.22	92.12	4.07	96.19	22.19	74	150	90	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH100	Test Voltage	AC 120V/60Hz

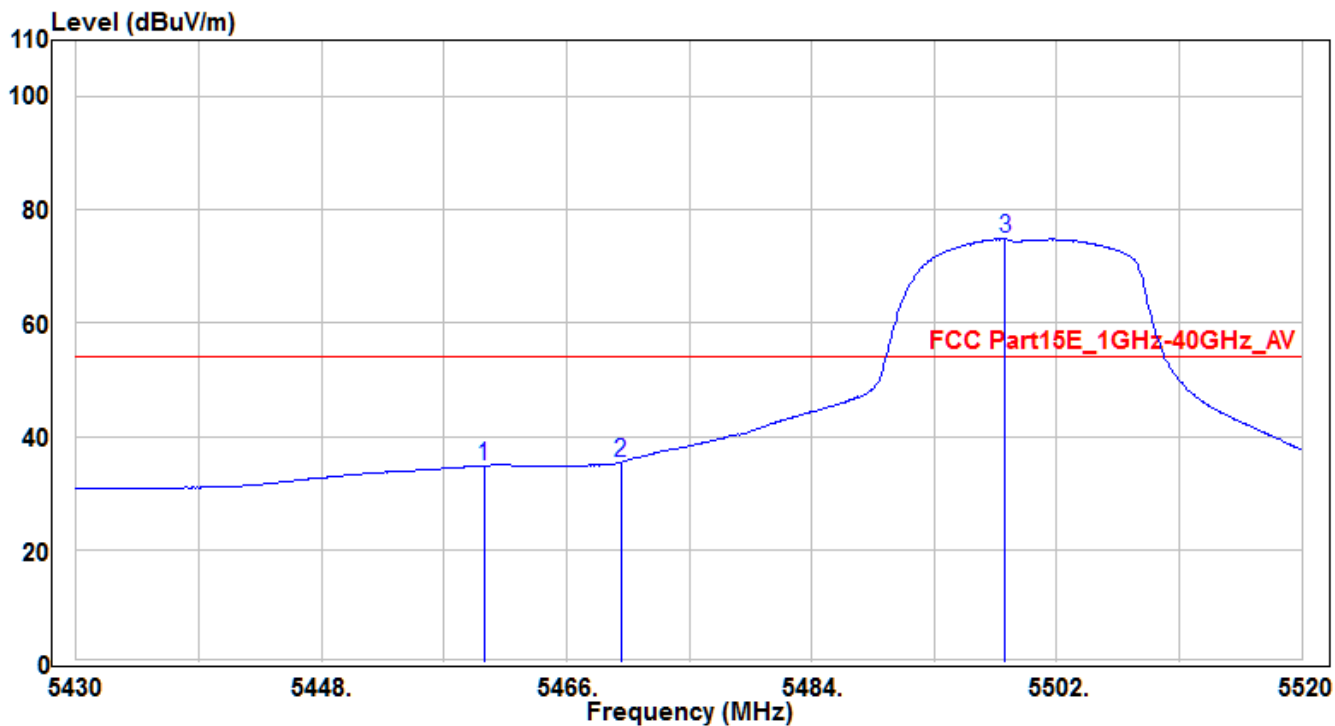


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5460	30.86	4	34.86	-19.14	54	150	90	Average
2	*	5470	31.44	4	35.44	-18.56	54	150	90	Average
3		5498.22	70.74	4.07	74.81	20.81	54	150	90	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH100	Test Voltage	AC 120V/60Hz

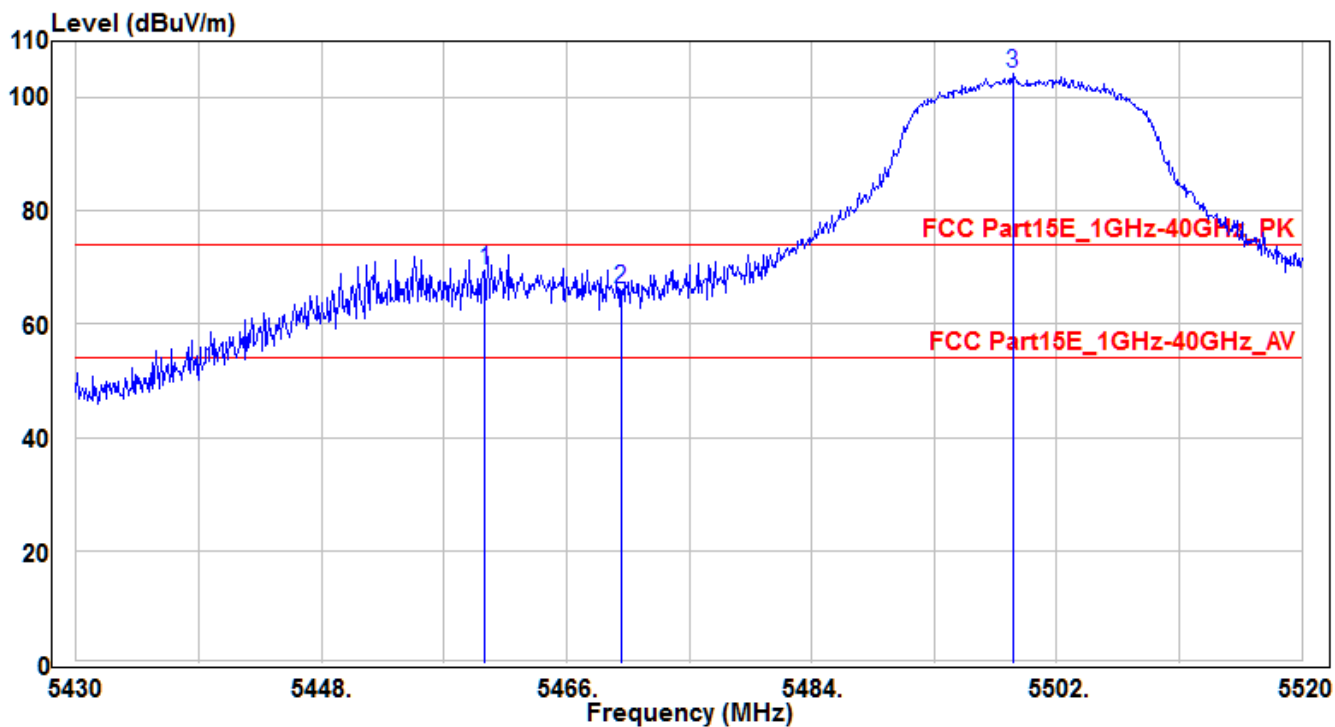


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5460	65.57	4	69.57	-4.43	74	190	125	Peak
2		5470	62.32	4	66.32	-7.68	74	190	125	Peak
3		5498.76	100.2	4.07	104.27	30.27	74	190	125	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH100	Test Voltage	AC 120V/60Hz

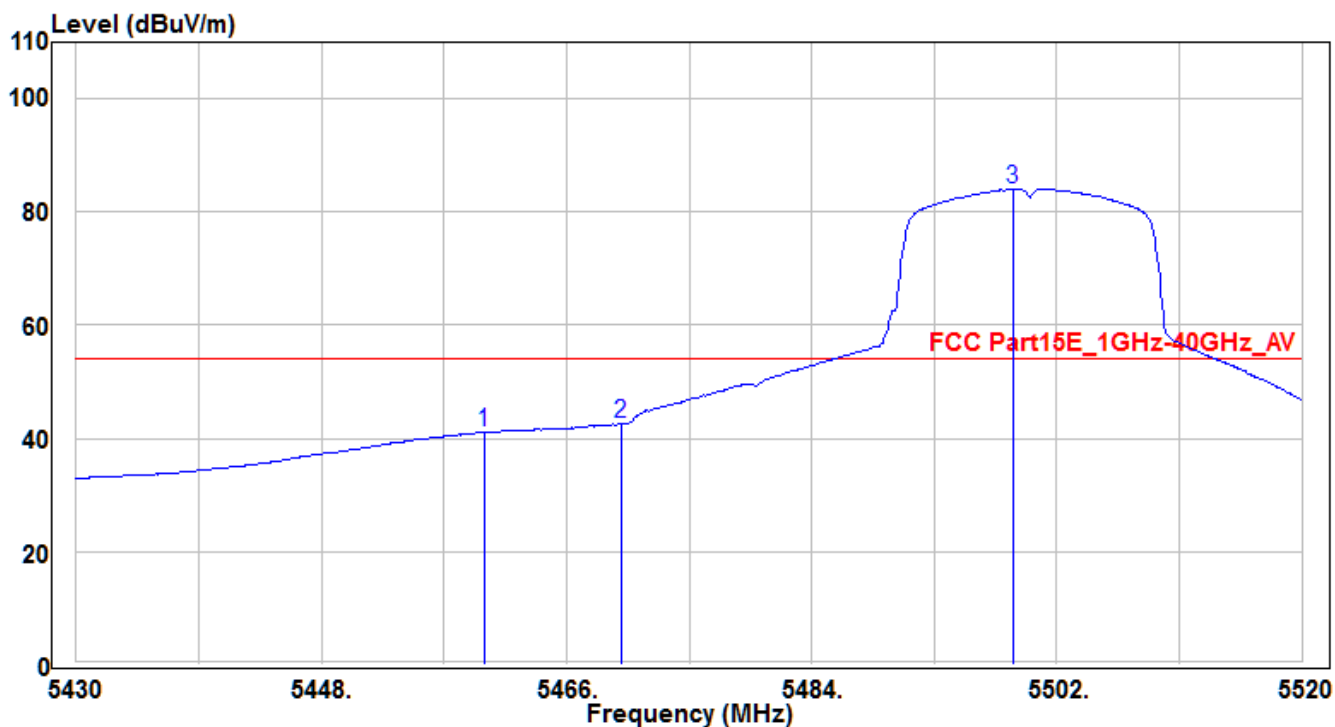


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.97	37.17	4	41.17	-12.83	54	190	125	Average
2	* 5470	38.51	4	42.51	-11.49	54	190	125	Average
3	5498.76	80	4.07	84.07	30.07	54	190	125	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH140	Test Voltage	AC 120V/60Hz

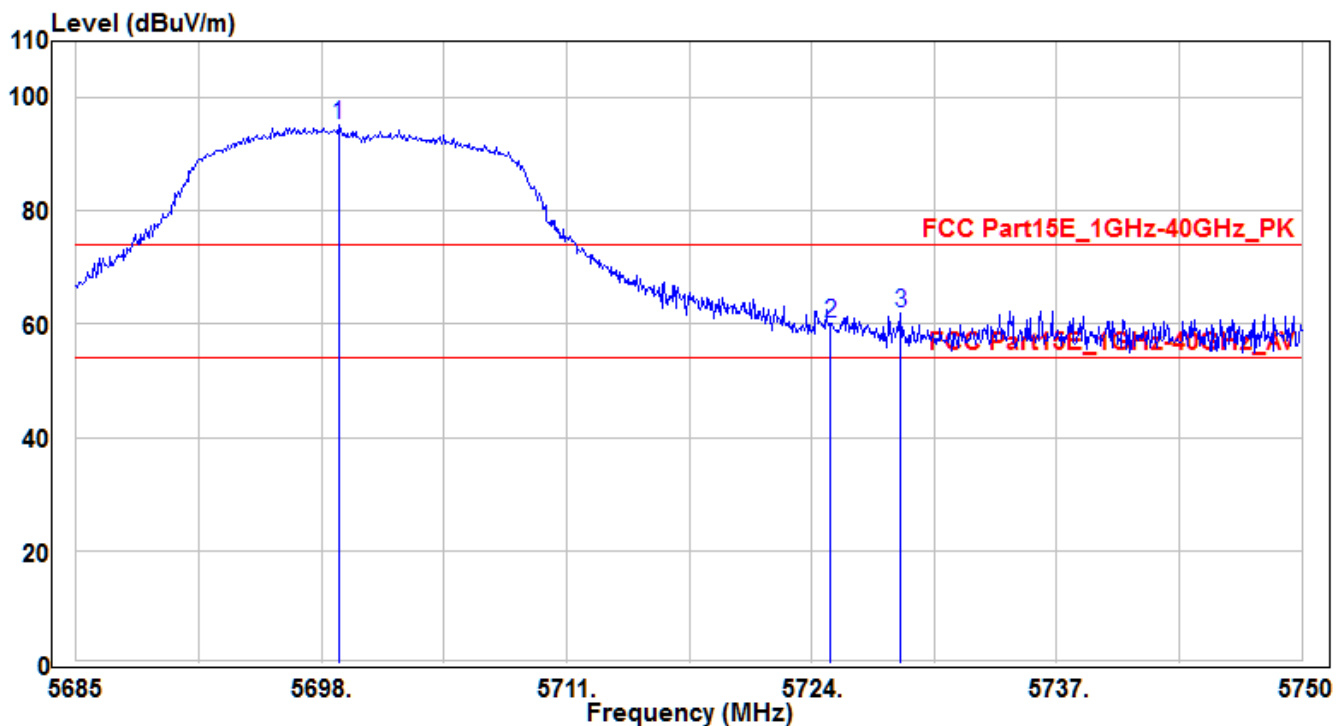


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.91	90.36	4.84	95.2	21.2	74	155	80	Peak
2	5725	55.08	4.93	60.01	-13.99	74	155	80	Peak
3	* 5728.745	56.99	4.95	61.94	-12.06	74	155	80	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH140	Test Voltage	AC 120V/60Hz

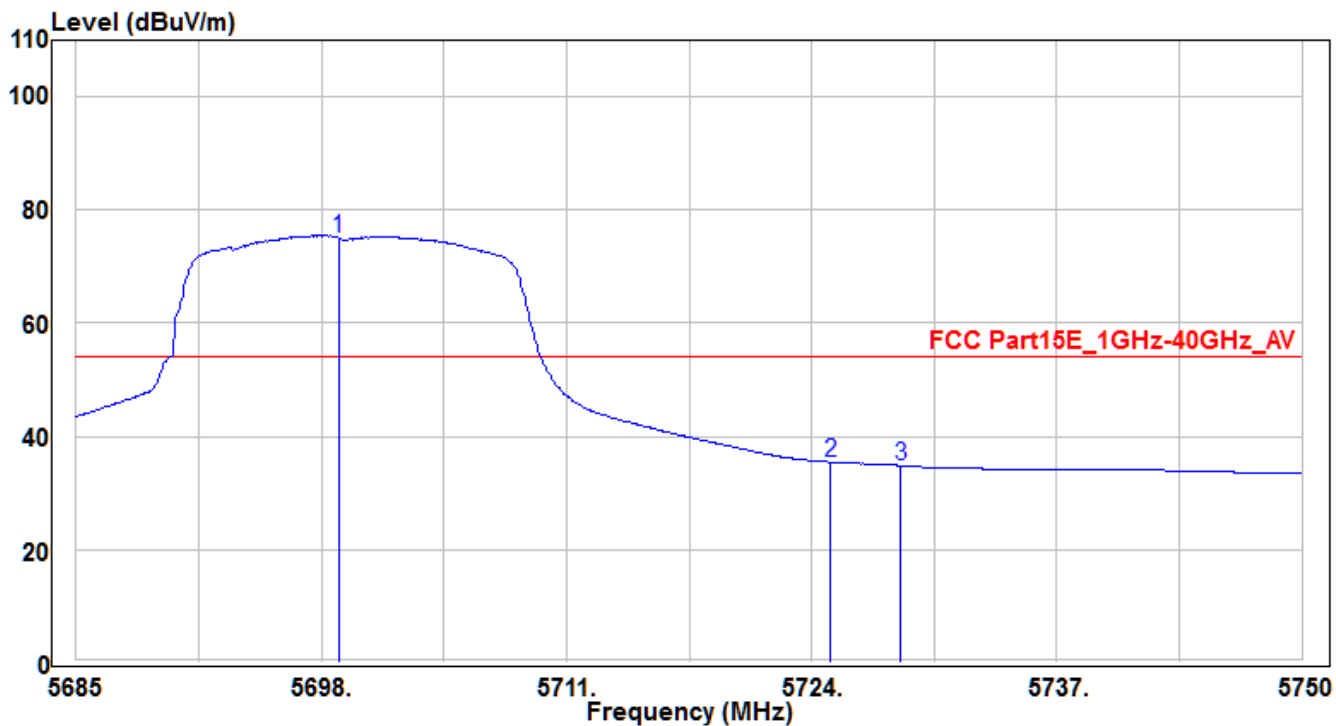


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5698.91	70.16	4.84	75	21	54	155	80	Average
2	*	5725	30.55	4.93	35.48	-18.52	54	155	80	Average
3		5728.745	29.94	4.95	34.89	-19.11	54	155	80	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH140	Test Voltage	AC 120V/60Hz

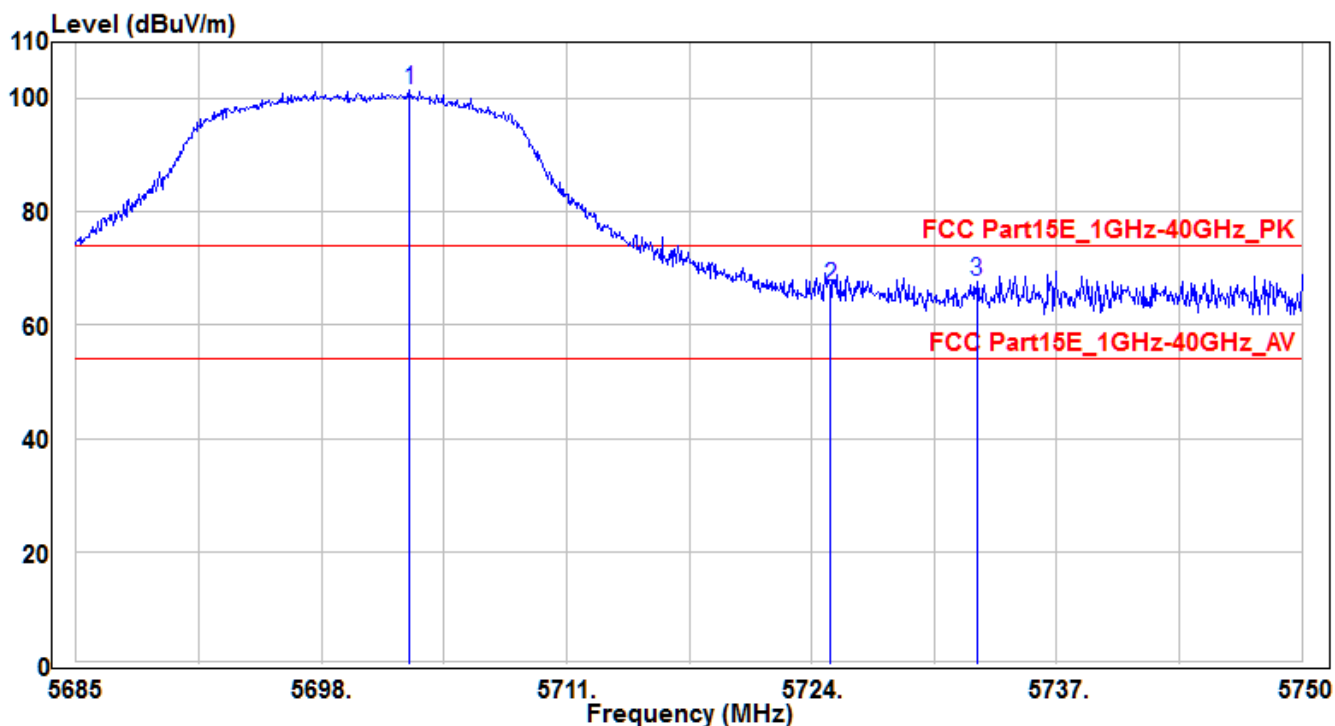


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.68	96.66	4.84	101.5	27.5	74	180	165	Peak
2	5725	61.96	4.93	66.89	-7.11	74	180	165	Peak
3	* 5732.775	62.84	4.97	67.81	-6.19	74	180	165	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH140	Test Voltage	AC 120V/60Hz

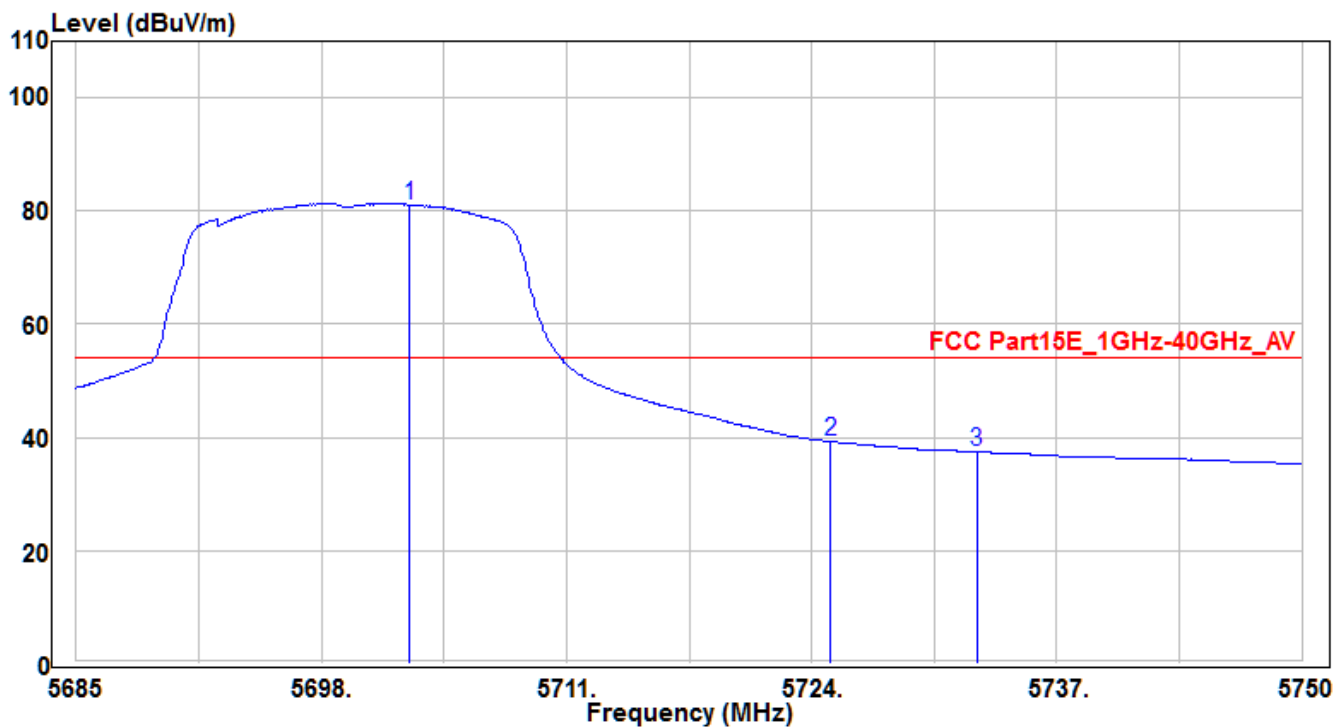


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5702.68	76.27	4.84	81.11	27.11	54	180	165	Average
2	*	5725	34.38	4.93	39.31	-14.69	54	180	165	Average
3		5732.775	32.54	4.97	37.51	-16.49	54	180	165	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH149	Test Voltage	AC 120V/60Hz

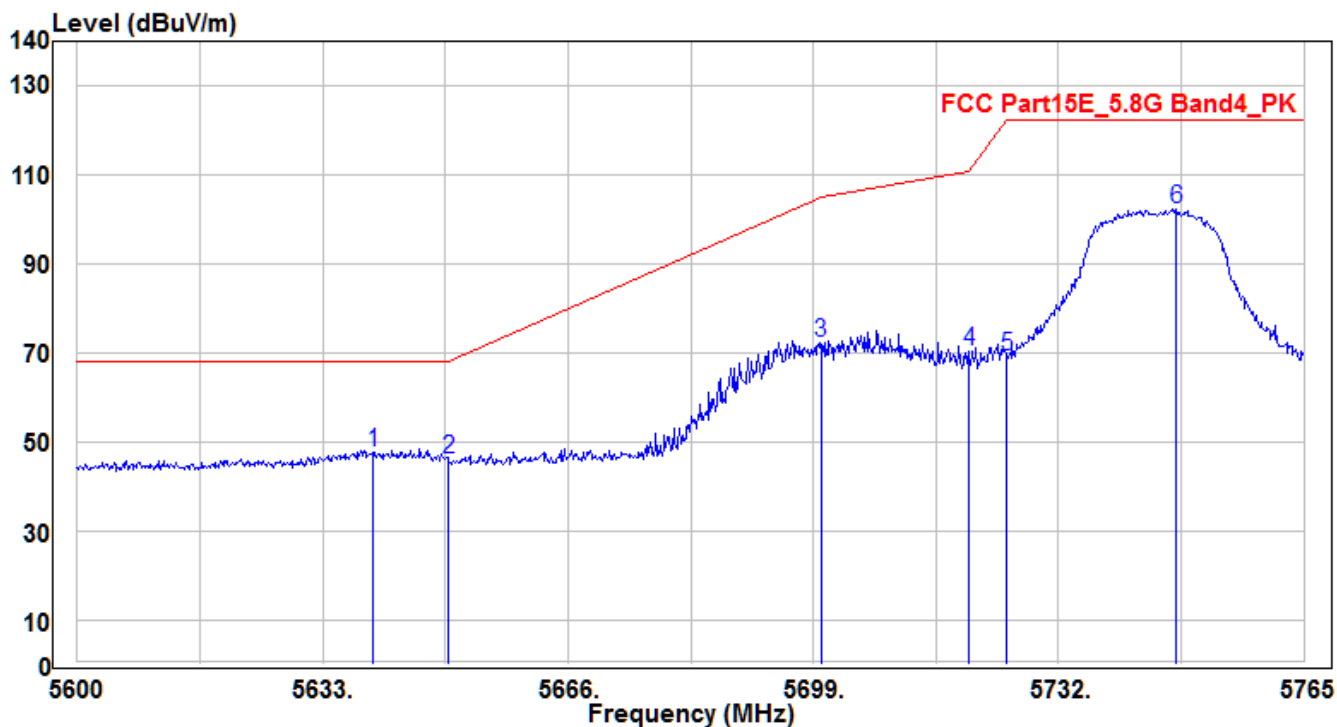


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5639.765	42.99	4.61	47.6	-20.6	68.2	155	80	Peak
2	5649.995	41.34	4.65	45.99	-22.21	68.2	155	80	Peak
3	5700	67.57	4.84	72.41	-32.79	105.2	155	80	Peak
4	5720	65.52	4.91	70.43	-40.37	110.8	155	80	Peak
5	5725	64.22	4.93	69.15	-53.05	122.2	155	80	Peak
6	* 5747.84	97.24	5.03	102.27	-19.93	122.2	155	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH149	Test Voltage	AC 120V/60Hz

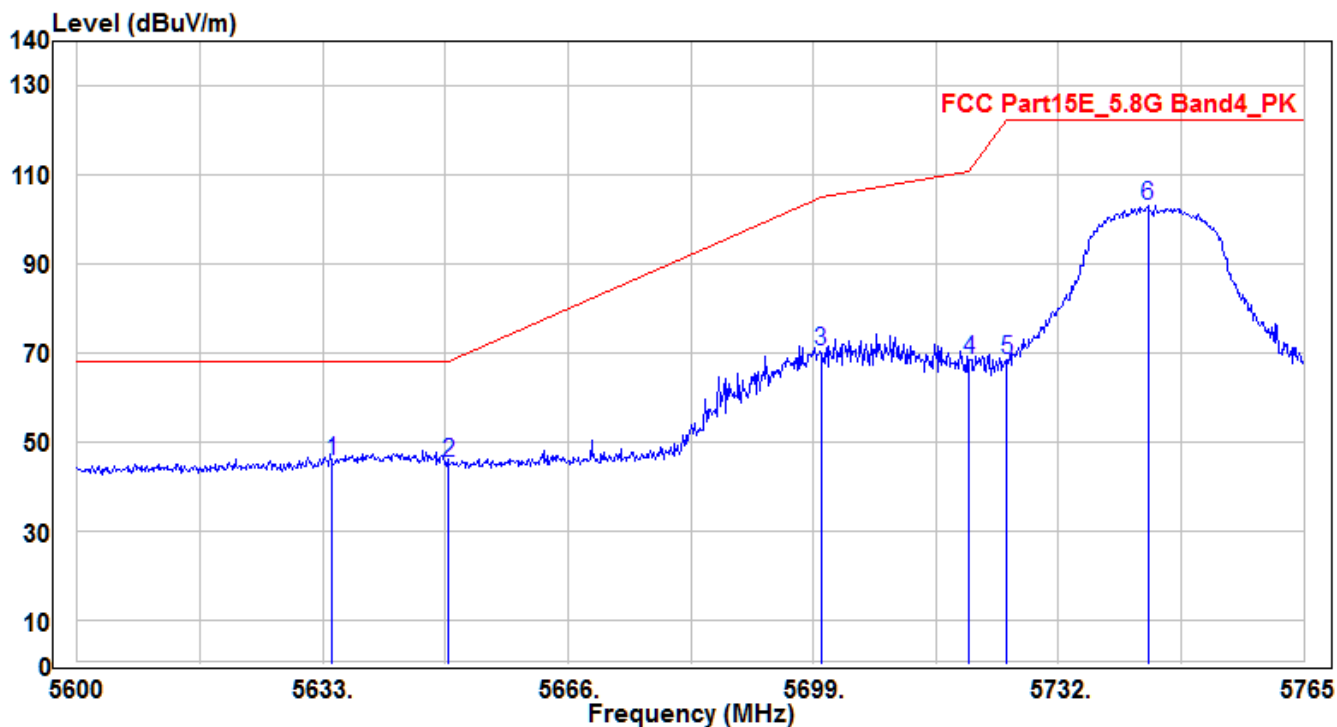


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5634.32	41.1	4.58	45.68	-22.52	68.2	225	120	Peak
2	5650	40.65	4.65	45.3	-22.9	68.2	225	120	Peak
3	5700	65.72	4.84	70.56	-34.64	105.2	225	120	Peak
4	5720	63.76	4.91	68.67	-42.13	110.8	225	120	Peak
5	5725	63.64	4.93	68.57	-53.63	122.2	225	120	Peak
6	* 5744.045	98.1	5	103.1	-19.1	122.2	225	120	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH165	Test Voltage	AC 120V/60Hz

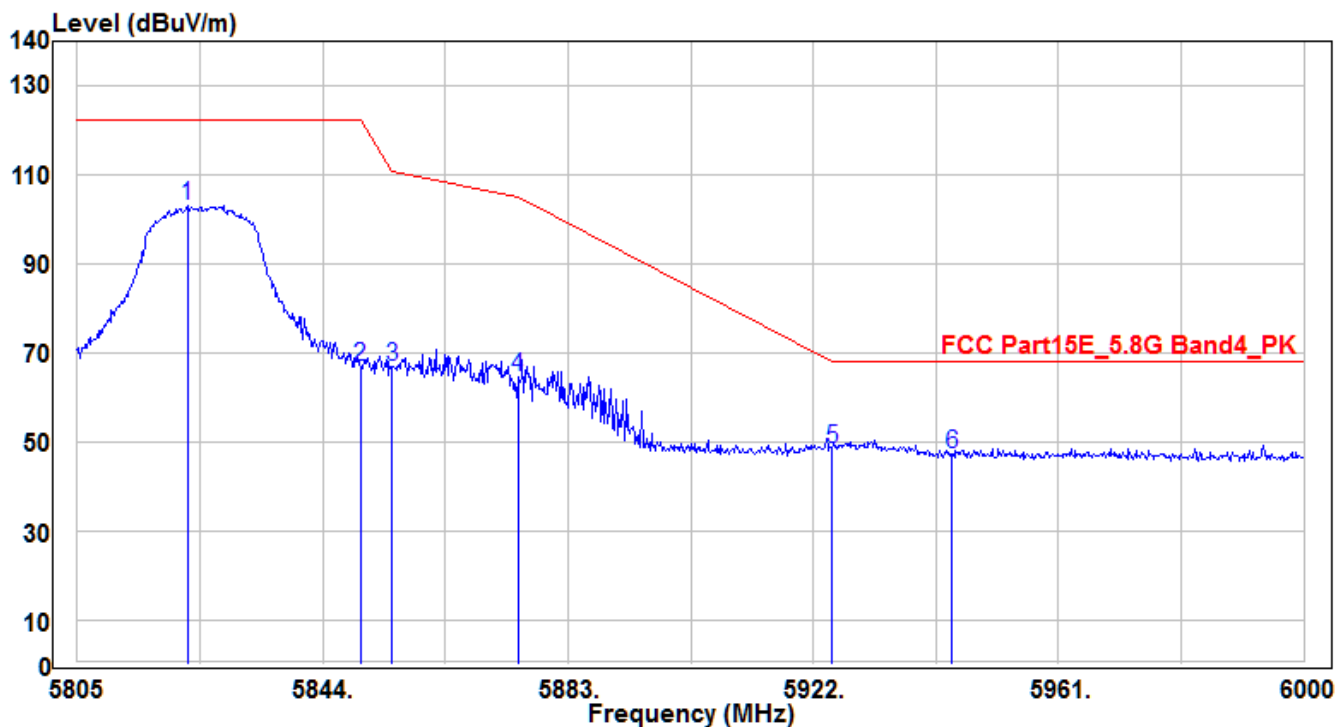


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5822.55	97.72	5.31	103.03	-19.17	122.2	155	80	Peak
2		5850	61.62	5.41	67.03	-55.17	122.2	155	80	Peak
3		5855	61.56	5.44	67	-43.8	110.8	155	80	Peak
4		5875	59.19	5.51	64.7	-40.5	105.2	155	80	Peak
5		5925	42.89	5.7	48.59	-19.61	68.2	155	80	Peak
6		5944.035	41.51	5.77	47.28	-20.92	68.2	155	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/04/06
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2-CH165	Test Voltage	AC 120V/60Hz

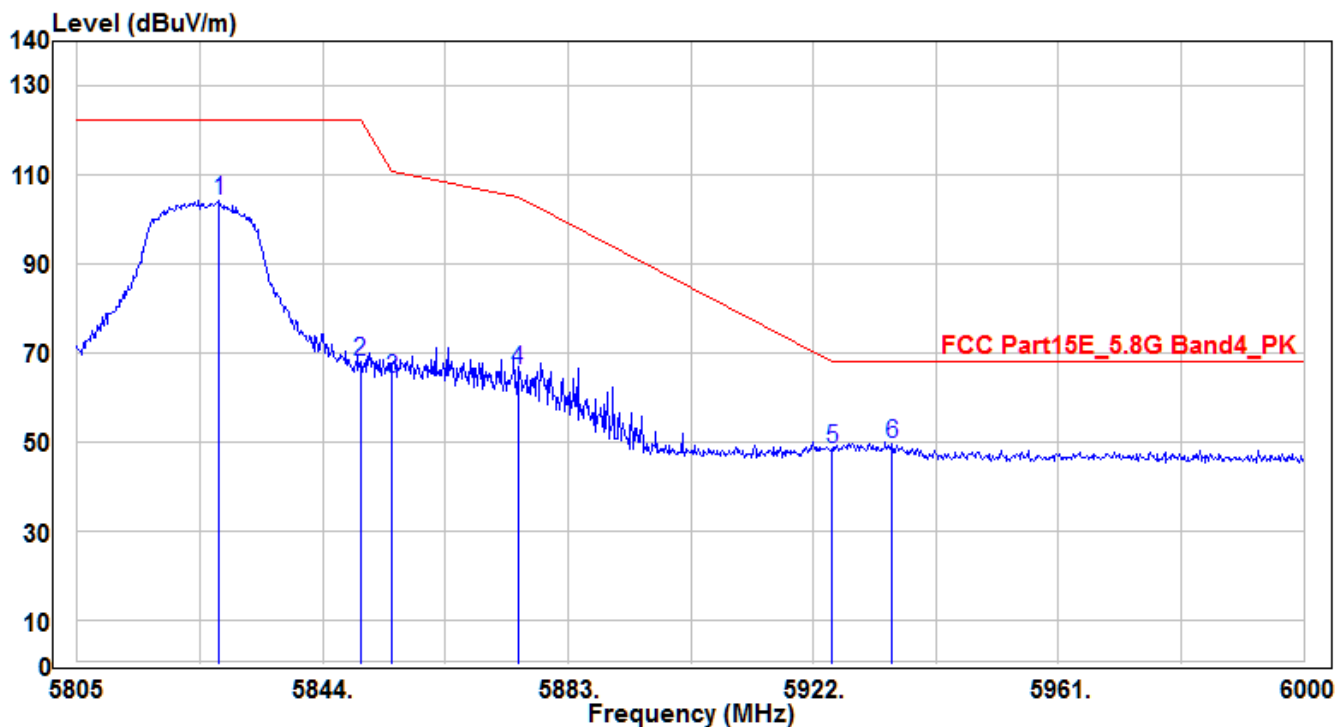


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5827.62	98.9	5.33	104.23	-17.97	122.2	180	130	Peak
2		5850	62.78	5.41	68.19	-54.01	122.2	180	130	Peak
3		5855	58.69	5.44	64.13	-46.67	110.8	180	130	Peak
4		5875	60.7	5.51	66.21	-38.99	105.2	180	130	Peak
5		5925	42.84	5.7	48.54	-19.66	68.2	180	130	Peak
6		5934.48	43.9	5.74	49.64	-18.56	68.2	180	130	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH38	Test Voltage	AC 120V/60Hz

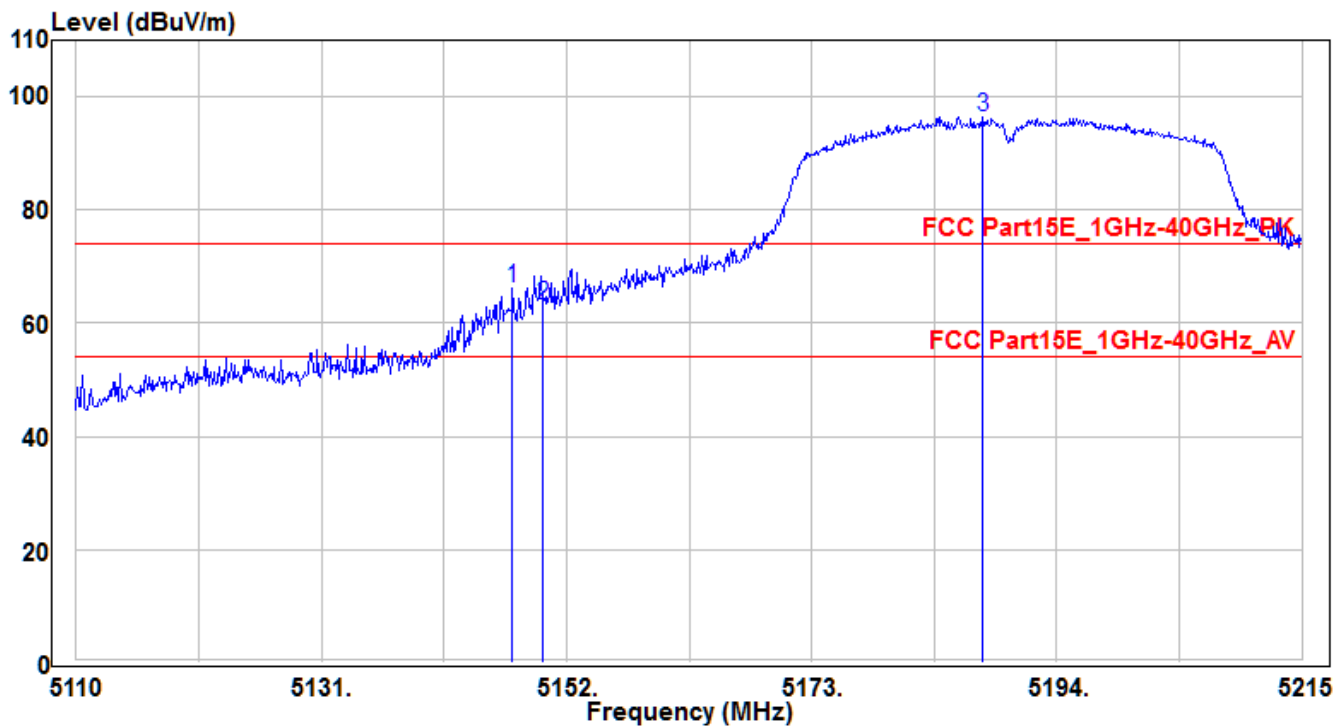


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.38	62.73	3.35	66.08	-7.92	74	155	80	Peak
2		5150	59.67	3.36	63.03	-10.97	74	155	80	Peak
3		5187.7	92.99	3.43	96.42	22.42	74	155	80	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH38	Test Voltage	AC 120V/60Hz

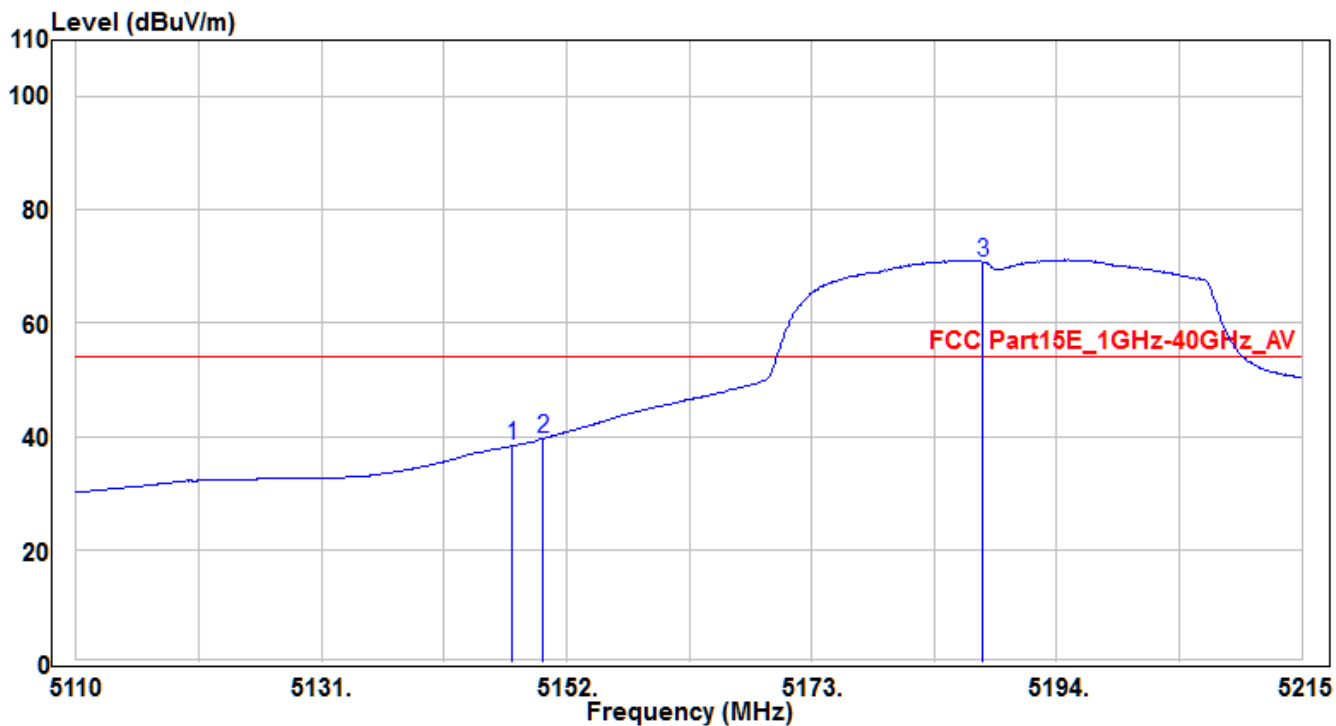


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.38	34.96	3.35	38.31	-15.69	54	155	80	Average
2	*	5150	36.28	3.36	39.64	-14.36	54	155	80	Average
3		5187.7	67.38	3.43	70.81	16.81	54	155	80	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH38	Test Voltage	AC 120V/60Hz

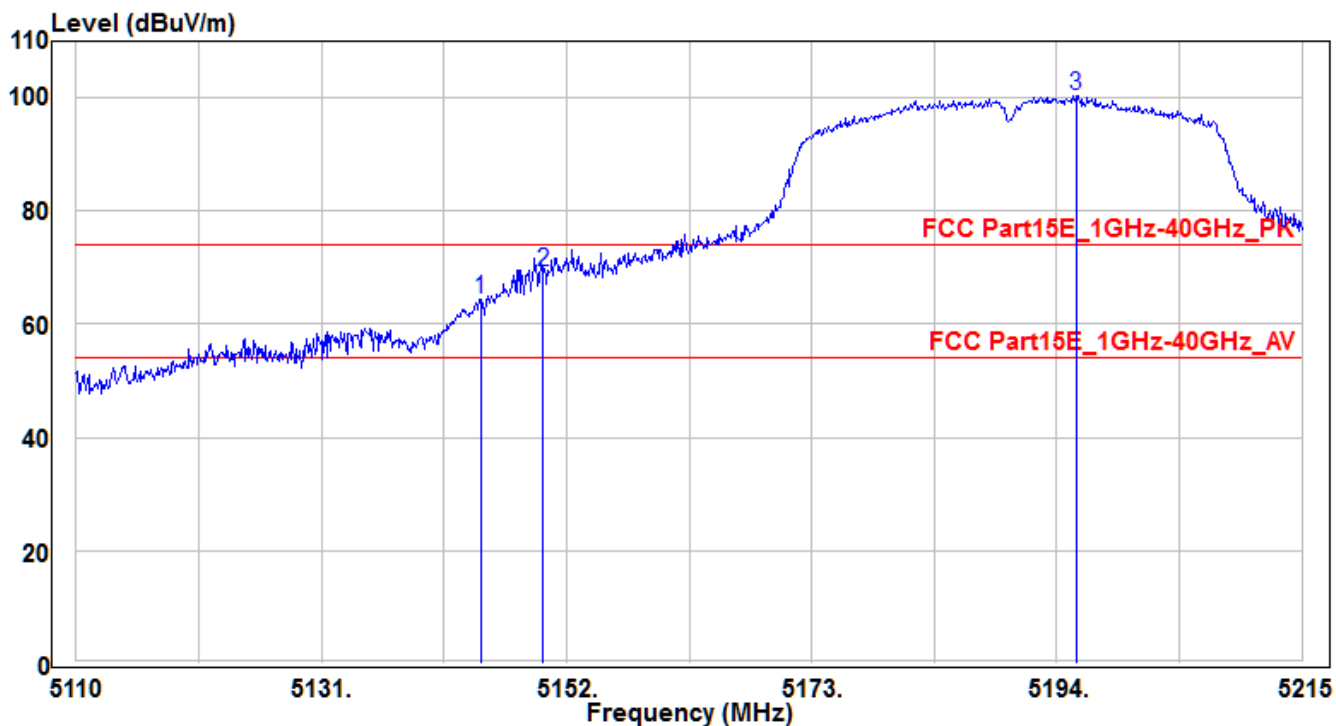


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5144.65	61.14	3.34	64.48	-9.52	74	190	115	Peak
2	* 5150	65.95	3.36	69.31	-4.69	74	190	115	Peak
3	5195.68	97.01	3.44	100.45	26.45	74	190	115	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH38	Test Voltage	AC 120V/60Hz

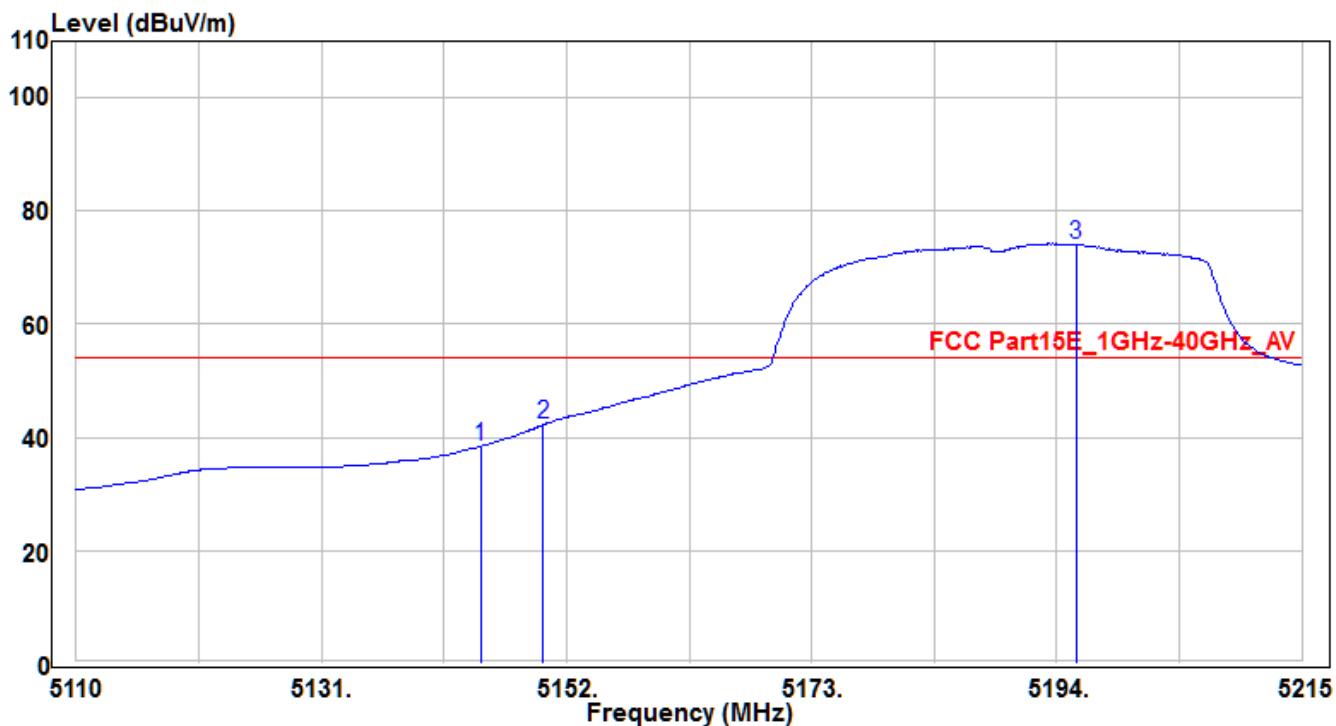


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5144.65	35.12	3.34	38.46	-15.54	54	190	115	Average
2	*	5150	38.87	3.36	42.23	-11.77	54	190	115	Average
3		5195.68	70.58	3.44	74.02	20.02	54	190	115	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH62	Test Voltage	AC 120V/60Hz

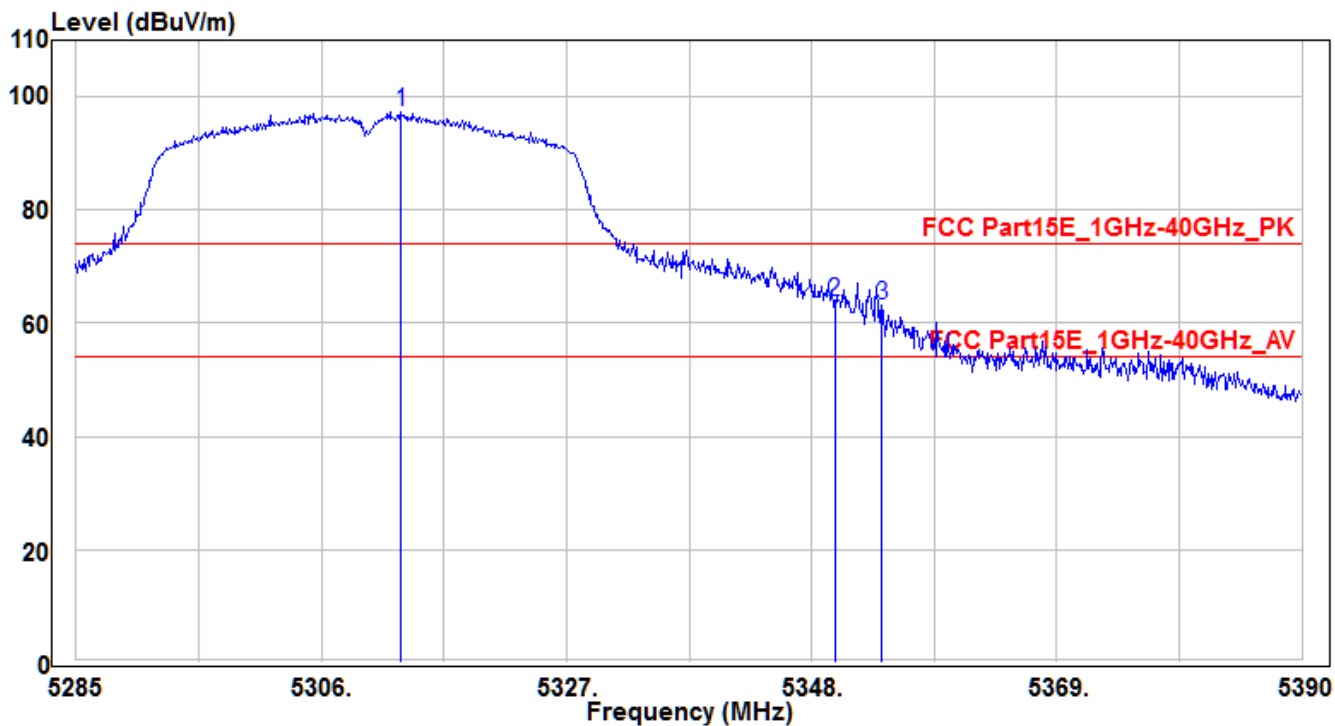


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5312.825	93.76	3.68	97.44	23.44	74	180	90	Peak
2	*	5350	60.02	3.76	63.78	-10.22	74	180	90	Peak
3		5353.985	59.49	3.78	63.27	-10.73	74	180	90	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH62	Test Voltage	AC 120V/60Hz

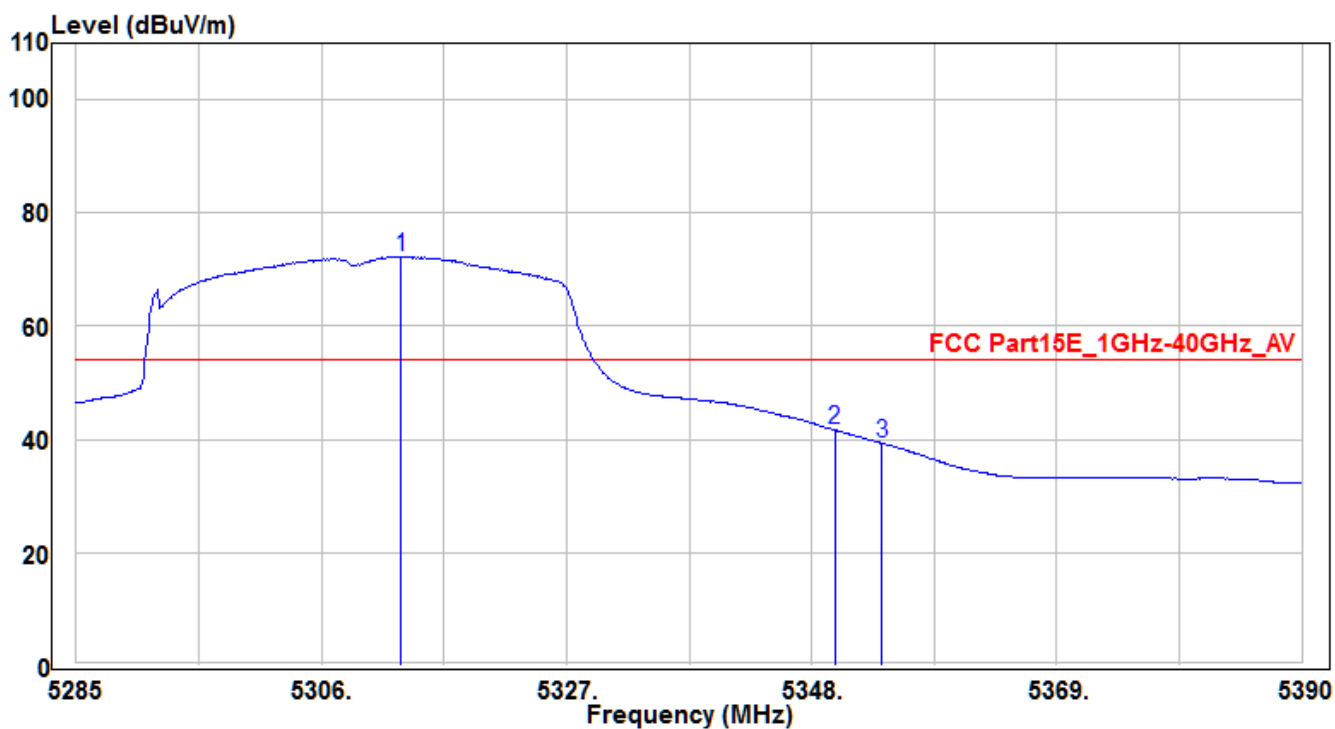


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.825	68.5	3.68	72.18	18.18	54	180	90	Average
2	* 5350	37.91	3.76	41.67	-12.33	54	180	90	Average
3	5353.985	35.58	3.78	39.36	-14.64	54	180	90	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH62	Test Voltage	AC 120V/60Hz

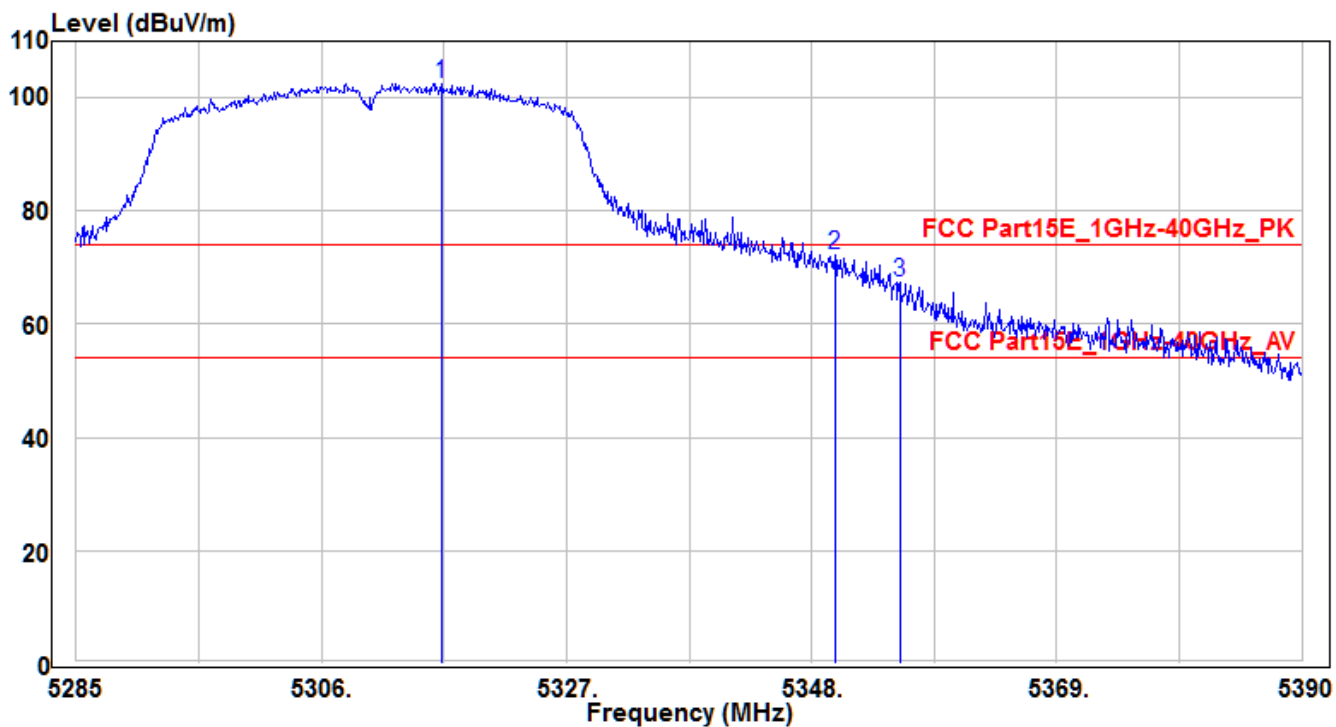


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5316.29	98.69	3.7	102.39	28.39	74	190	115	Peak
2	*	5350	68.49	3.76	72.25	-1.75	74	190	115	Peak
3		5355.56	63.7	3.78	67.48	-6.52	74	190	115	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH62	Test Voltage	AC 120V/60Hz

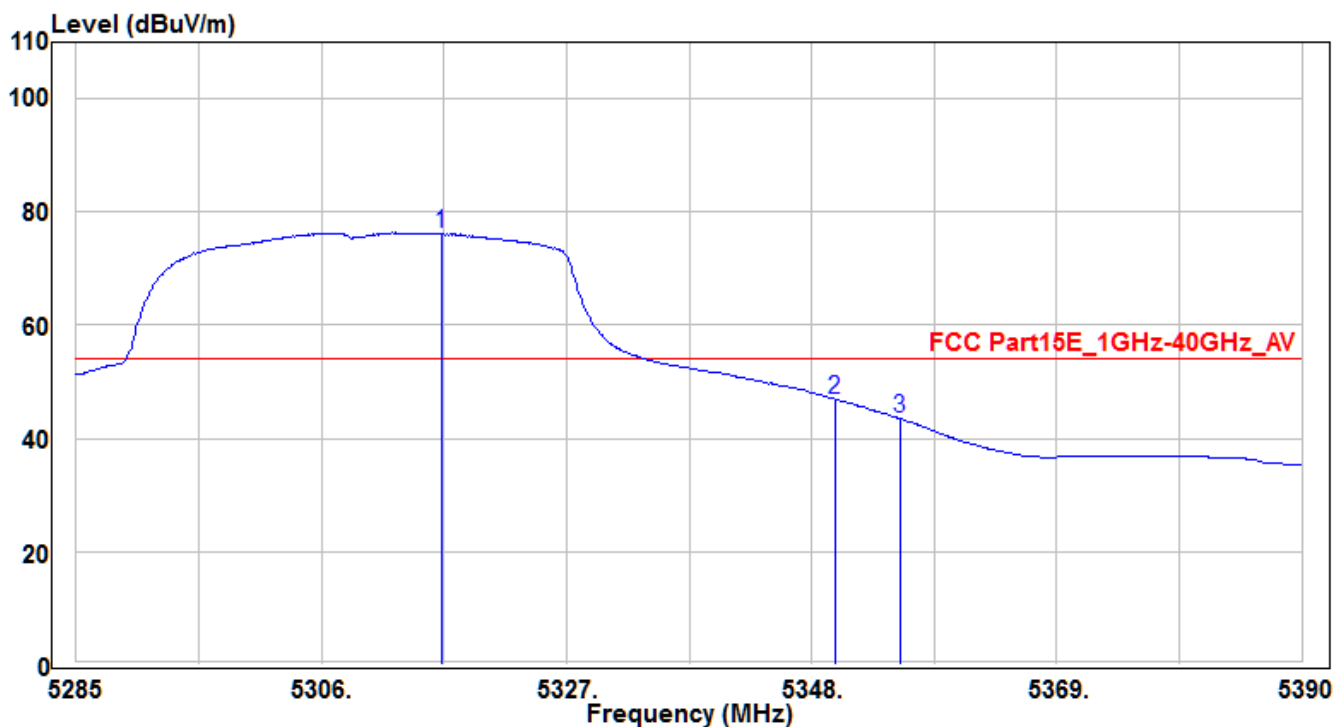


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.29	72.35	3.7	76.05	22.05	54	190	115	Average
2	* 5350	43.2	3.76	46.96	-7.04	54	190	115	Average
3	5355.56	39.7	3.78	43.48	-10.52	54	190	115	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH102	Test Voltage	AC 120V/60Hz

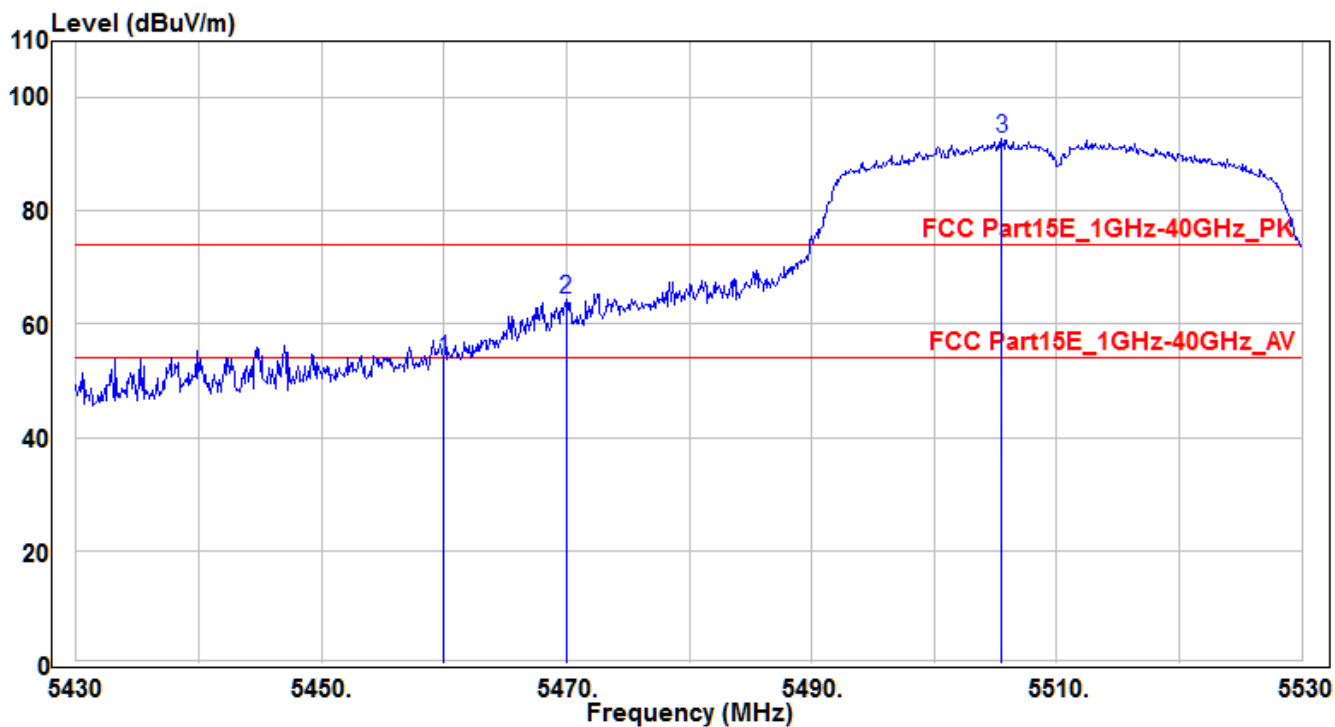


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5460	49.94	4	53.94	-20.06	74	150	100	Peak
2	*	5470	60.31	4	64.31	-9.69	74	150	100	Peak
3		5505.5	88.68	4.09	92.77	18.77	74	150	100	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH102	Test Voltage	AC 120V/60Hz

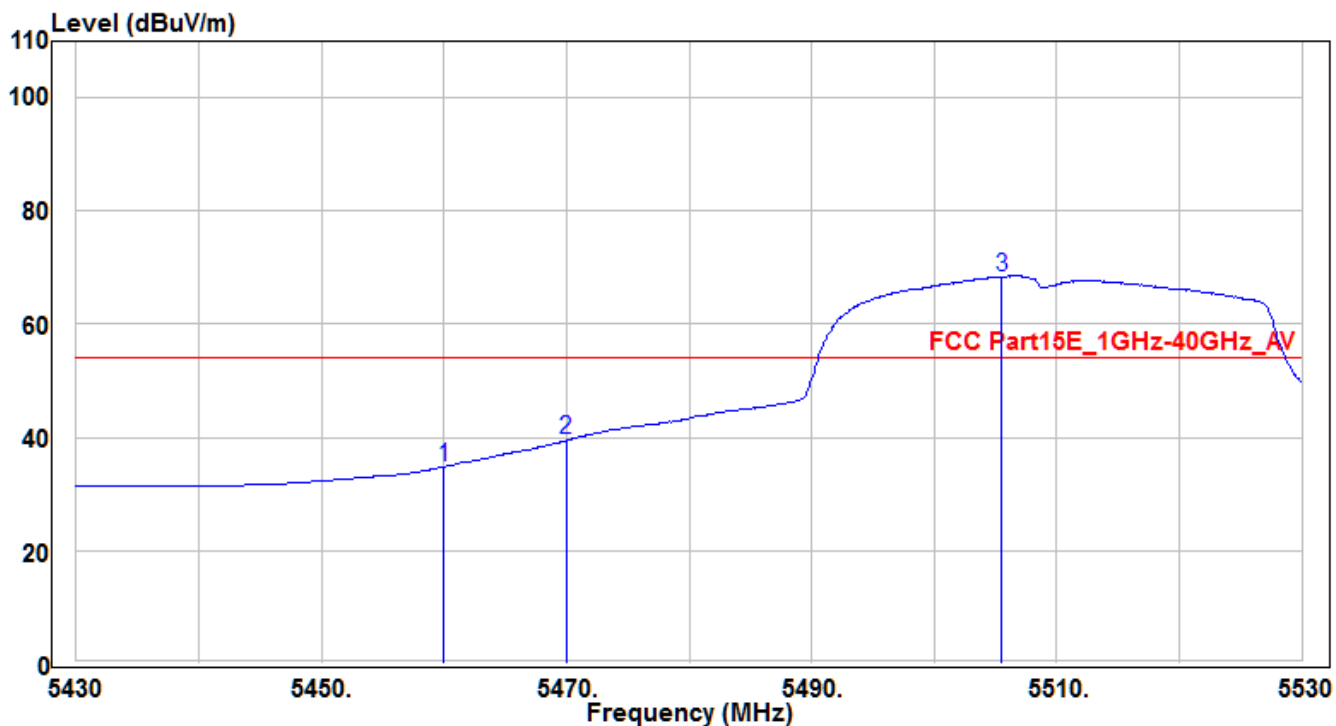


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5460	30.85	4	34.85	-19.15	54	150	100	Average
2	5470	35.49	4	39.49	-14.51	54	150	100	Average
3	* 5505.5	64.3	4.09	68.39	14.39	54	150	100	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH102	Test Voltage	AC 120V/60Hz

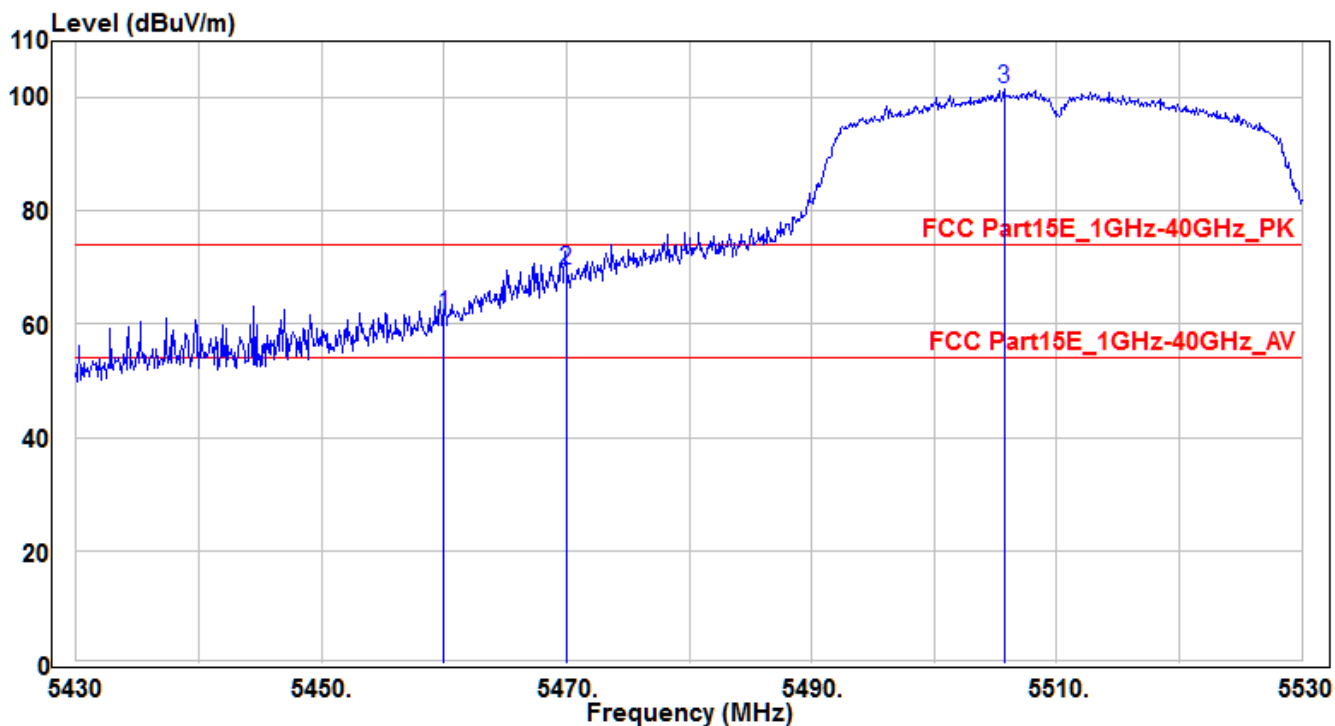


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5460	57.74	4	61.74	-12.26	74	195	130	Peak
2	*	5470	65.4	4	69.4	-4.6	74	195	130	Peak
3		5505.7	97.48	4.09	101.57	27.57	74	195	130	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH102	Test Voltage	AC 120V/60Hz

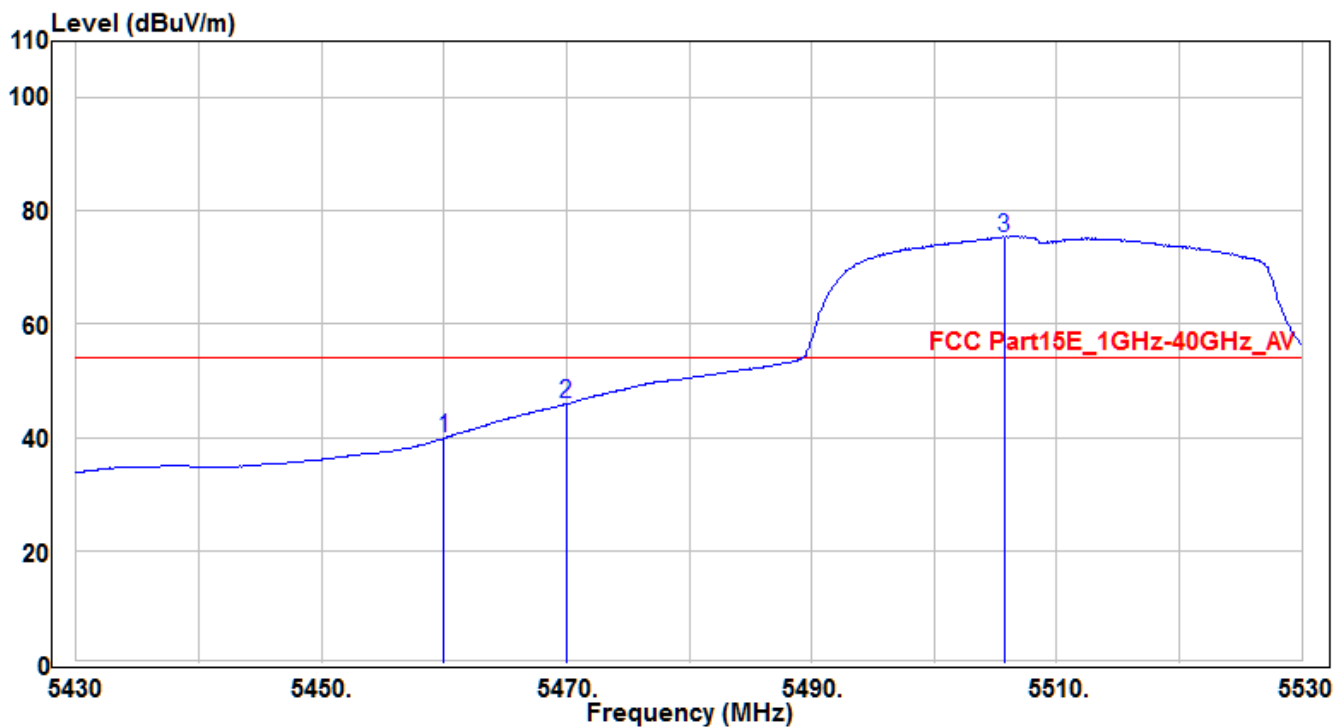


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5460	35.88	4	39.88	-14.12	54	195	130	Average
2	*	5470	41.89	4	45.89	-8.11	54	195	130	Average
3		5505.7	71.19	4.09	75.28	21.28	54	195	130	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH134	Test Voltage	AC 120V/60Hz

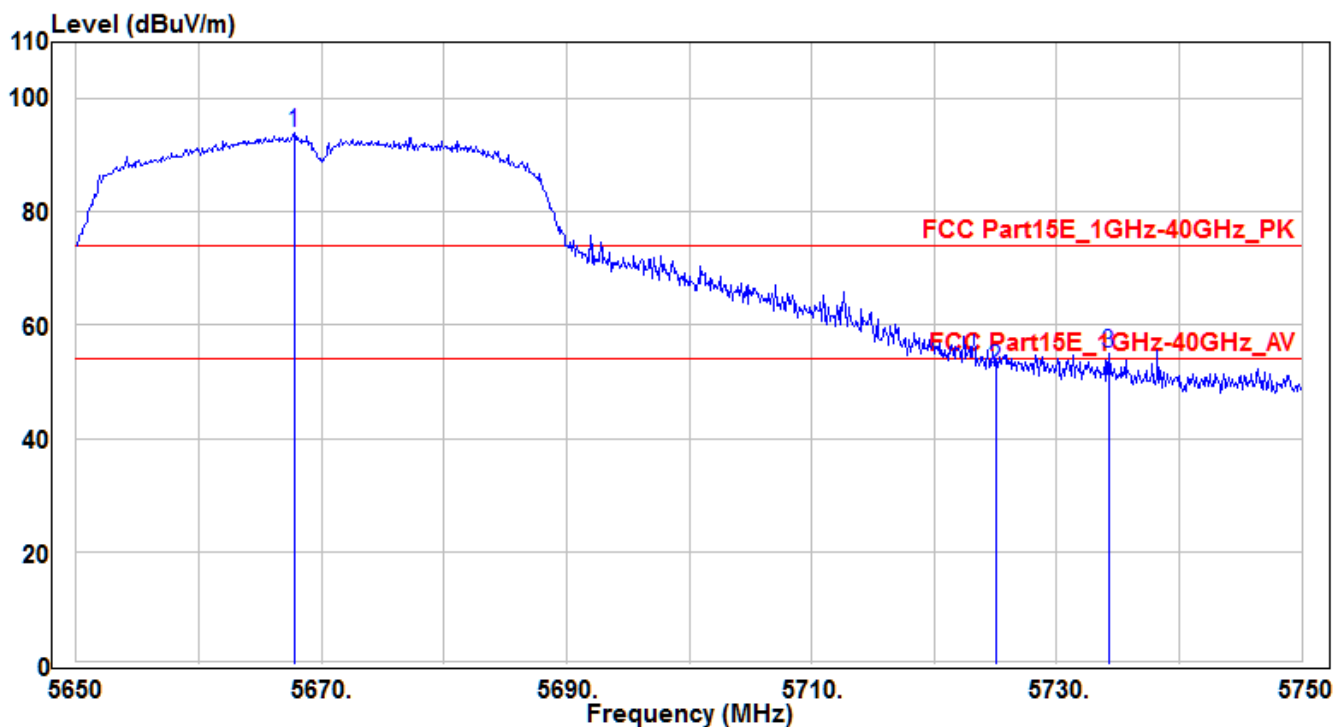


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.785	89.35	4.71	94.06	20.06	74	150	95	Peak
2	5725	47.49	4.93	52.42	-21.58	74	150	95	Peak
3	* 5734.25	50.05	4.97	55.02	-18.98	74	150	95	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH134	Test Voltage	AC 120V/60Hz

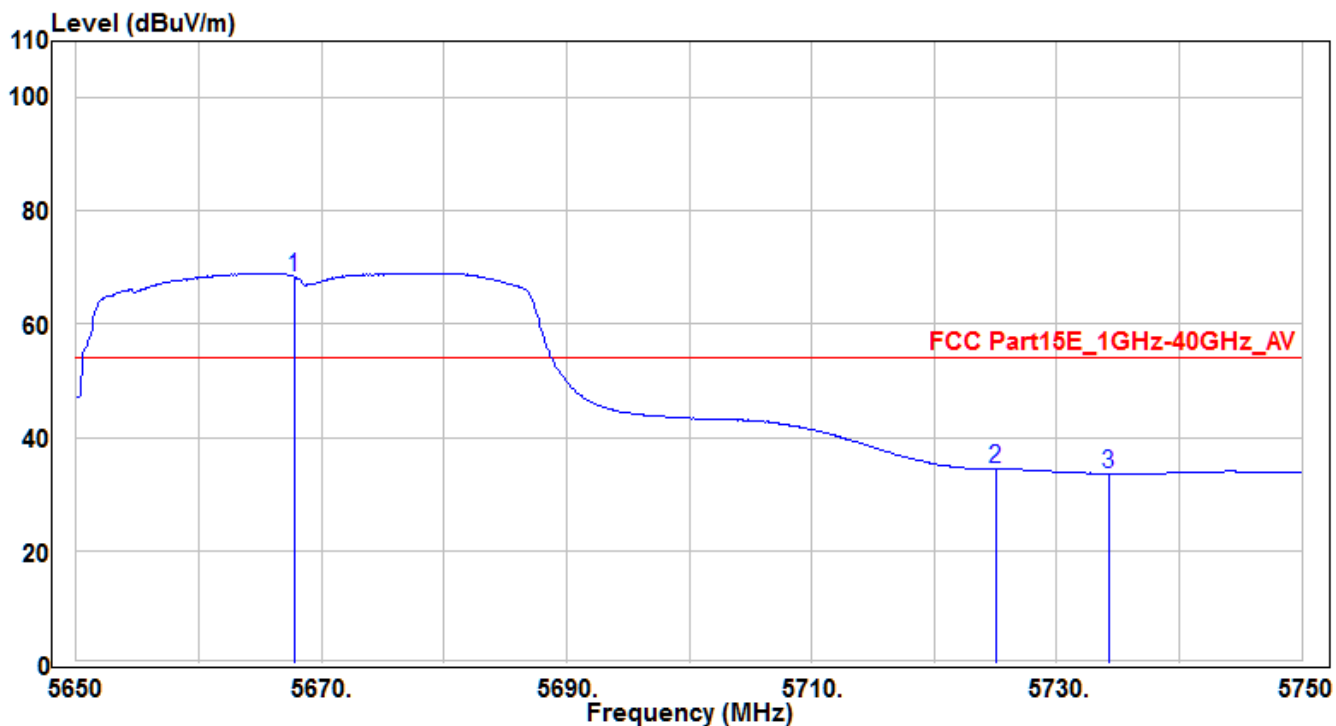


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5667.785	63.69	4.71	68.4	14.4	54	150	90	Average
2	*	5725	29.46	4.93	34.39	-19.61	54	150	90	Average
3		5734.25	28.63	4.97	33.6	-20.4	54	150	90	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH134	Test Voltage	AC 120V/60Hz

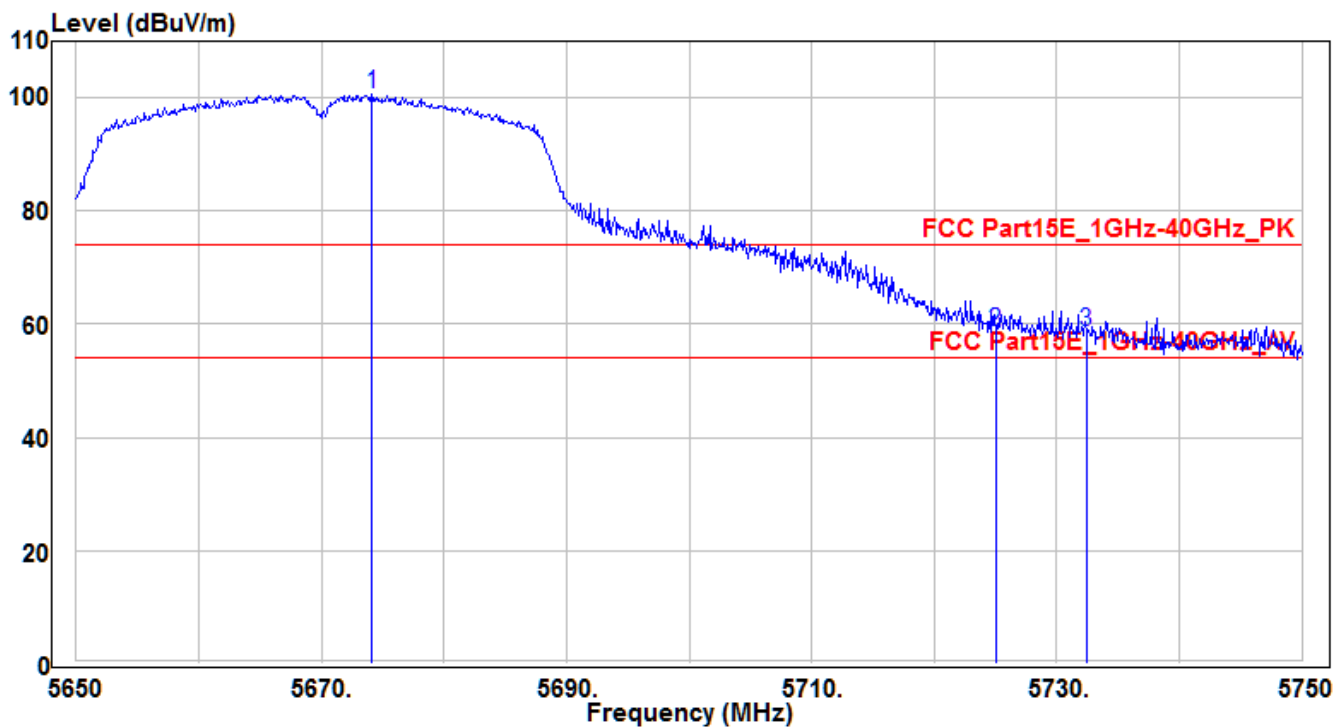


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.1	95.86	4.74	100.6	26.6	74	190	165	Peak
2	5725	53.58	4.93	58.51	-15.49	74	190	165	Peak
3	* 5732.4	53.75	4.97	58.72	-15.28	74	190	165	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH134	Test Voltage	AC 120V/60Hz

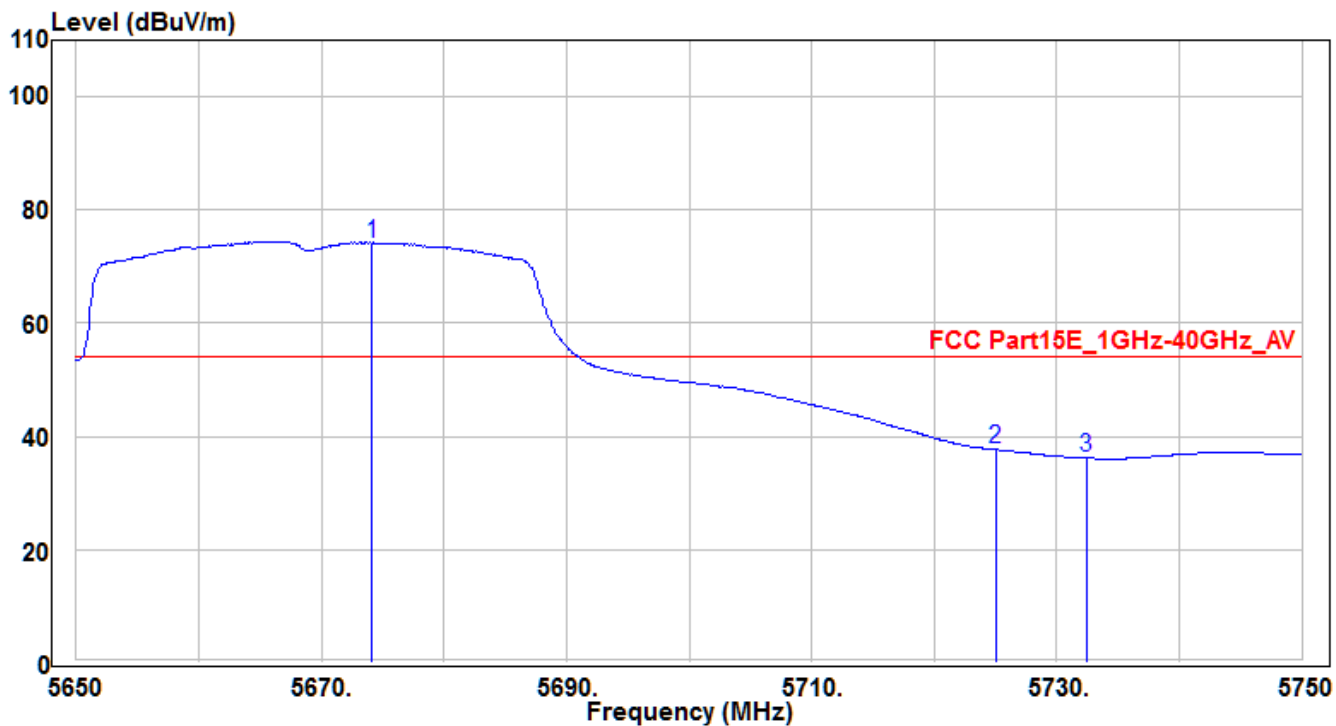


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5674.1	69.38	4.74	74.12	20.12	54	190	165	Average
2	*	5725	32.76	4.93	37.69	-16.31	54	190	165	Average
3		5732.4	31.24	4.97	36.21	-17.79	54	190	165	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) °

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH151	Test Voltage	AC 120V/60Hz

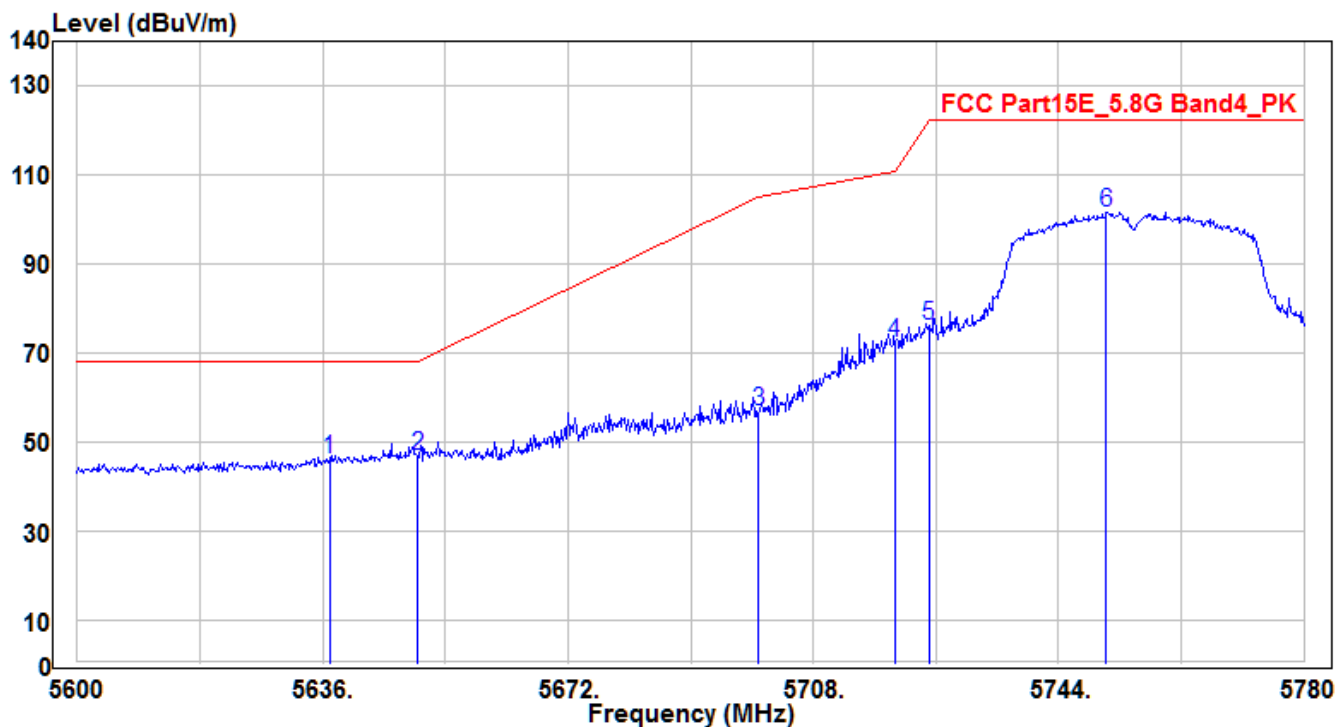


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5637.08	41.65	4.6	46.25	-21.95	68.2	155	80	Peak
2	5650	42.26	4.65	46.91	-21.29	68.2	155	80	Peak
3	5700	52	4.84	56.84	-48.36	105.2	155	80	Peak
4	5720	67.44	4.91	72.35	-38.45	110.8	155	80	Peak
5	5725	71.07	4.93	76	-46.2	122.2	155	80	Peak
6	* 5751.02	96.63	5.03	101.66	-20.54	122.2	155	80	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH151	Test Voltage	AC 120V/60Hz

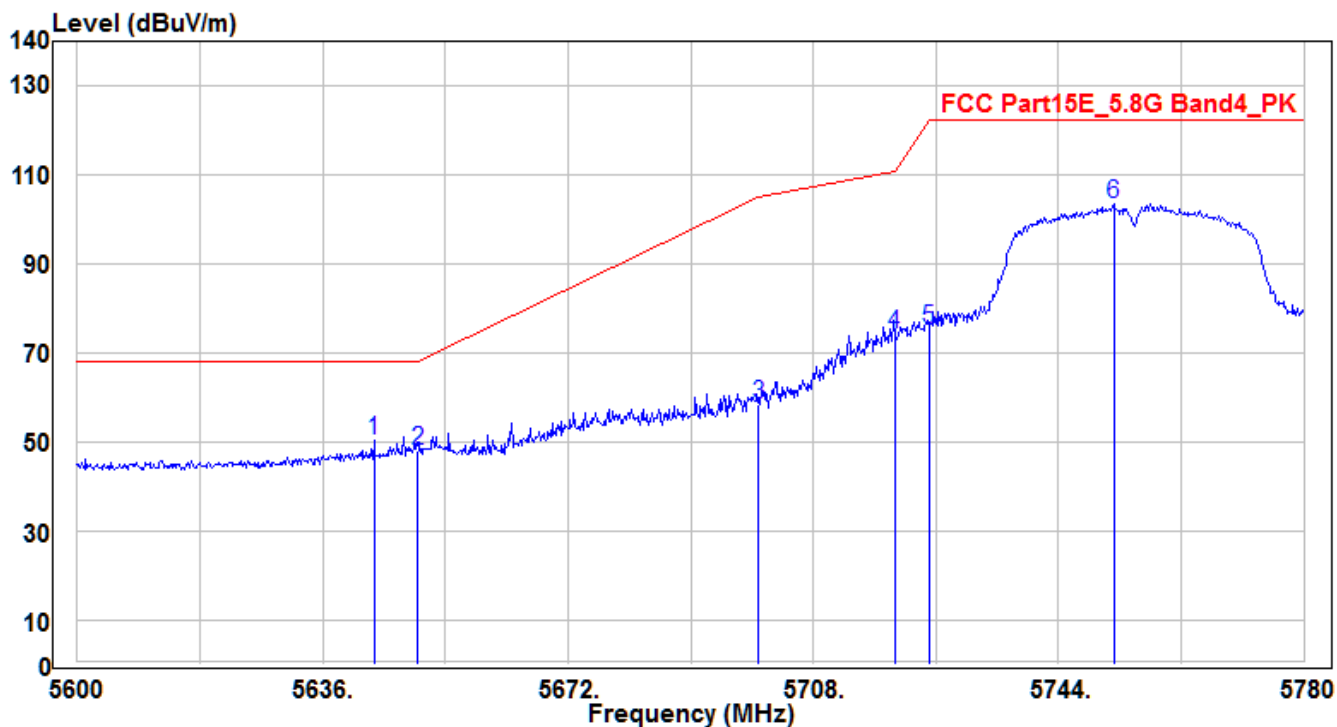


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.56	45.9	4.62	50.52	-17.68	68.2	165	120	Peak
2		5650	43.51	4.65	48.16	-20.04	68.2	165	120	Peak
3		5700	53.56	4.84	58.4	-46.8	105.2	165	120	Peak
4		5720	69.34	4.91	74.25	-36.55	110.8	165	120	Peak
5		5725	70.41	4.93	75.34	-46.86	122.2	165	120	Peak
6		5752.1	98.35	5.03	103.38	-18.82	122.2	165	120	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH159	Test Voltage	AC 120V/60Hz

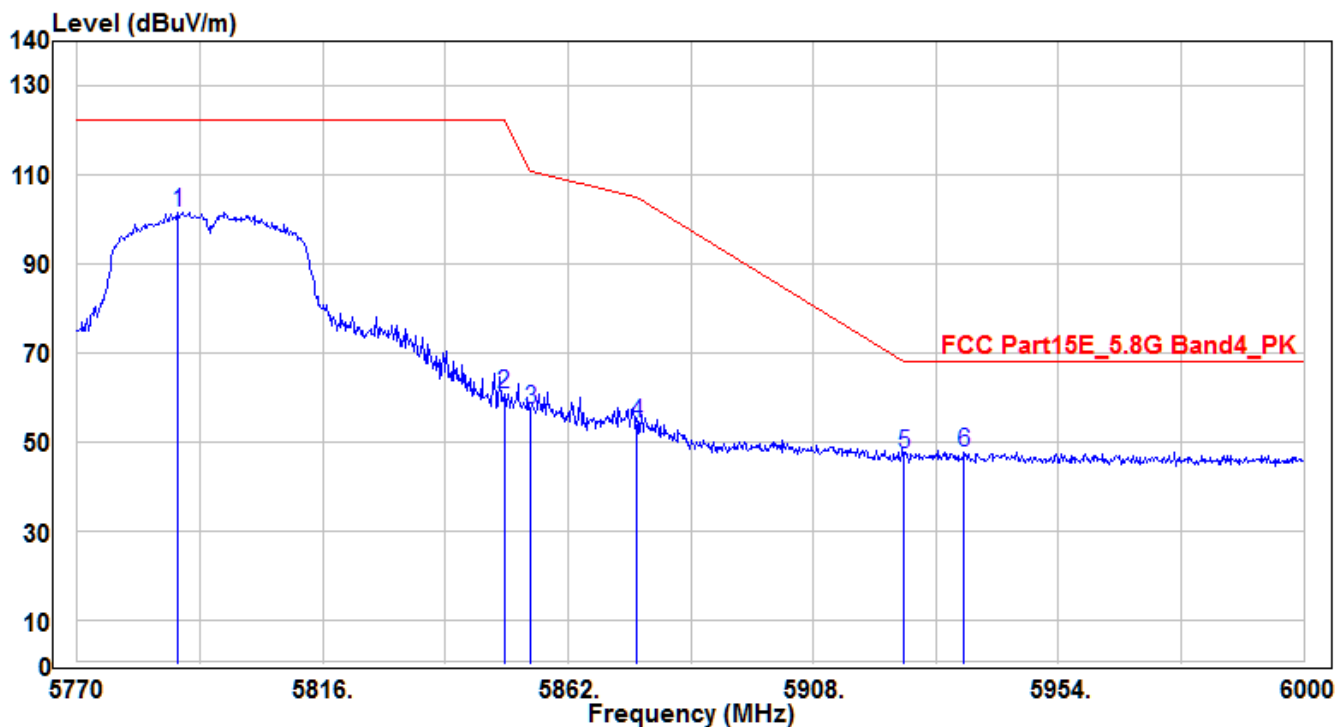


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5788.86	96.55	5.17	101.72	-20.48	122.2	150	90	Peak
2		5850	55.35	5.41	60.76	-61.44	122.2	150	90	Peak
3		5855	51.81	5.44	57.25	-53.55	110.8	150	90	Peak
4		5875	48.84	5.51	54.35	-50.85	105.2	150	90	Peak
5		5925	41.51	5.7	47.21	-20.99	68.2	150	90	Peak
6		5936.29	41.9	5.75	47.65	-20.55	68.2	150	90	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV/m) + C.F (Correction Factor) .

EUT	Handheld terminal	Test Date	2017/10/11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE3-CH159	Test Voltage	AC 120V/60Hz

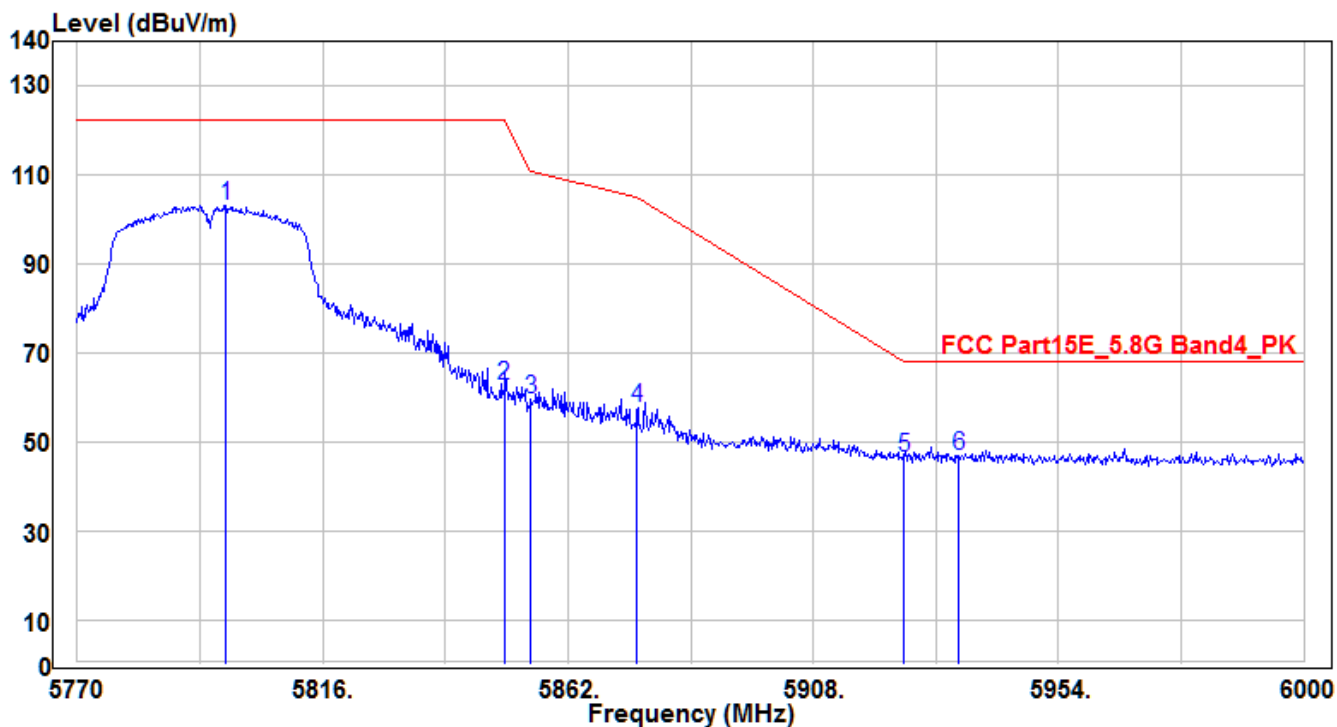

No		Frequency (MHz)	Reading (dBUV/m)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5797.83	97.99	5.22	103.21	-18.99	122.2	190	120	Peak
2		5850	57.24	5.41	62.65	-59.55	122.2	190	120	Peak
3		5855	54.15	5.44	59.59	-51.21	110.8	190	120	Peak
4		5875	52.38	5.51	57.89	-47.31	105.2	190	120	Peak
5		5925	40.92	5.7	46.62	-21.58	68.2	190	120	Peak
6		5935.37	41.2	5.75	46.95	-21.25	68.2	190	120	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBUV/m) = Reading(dBUV/m) + C.F (Correction Factor) .

7.10. AC Conducted Emissions Measurement

7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.10.3. Test Setup

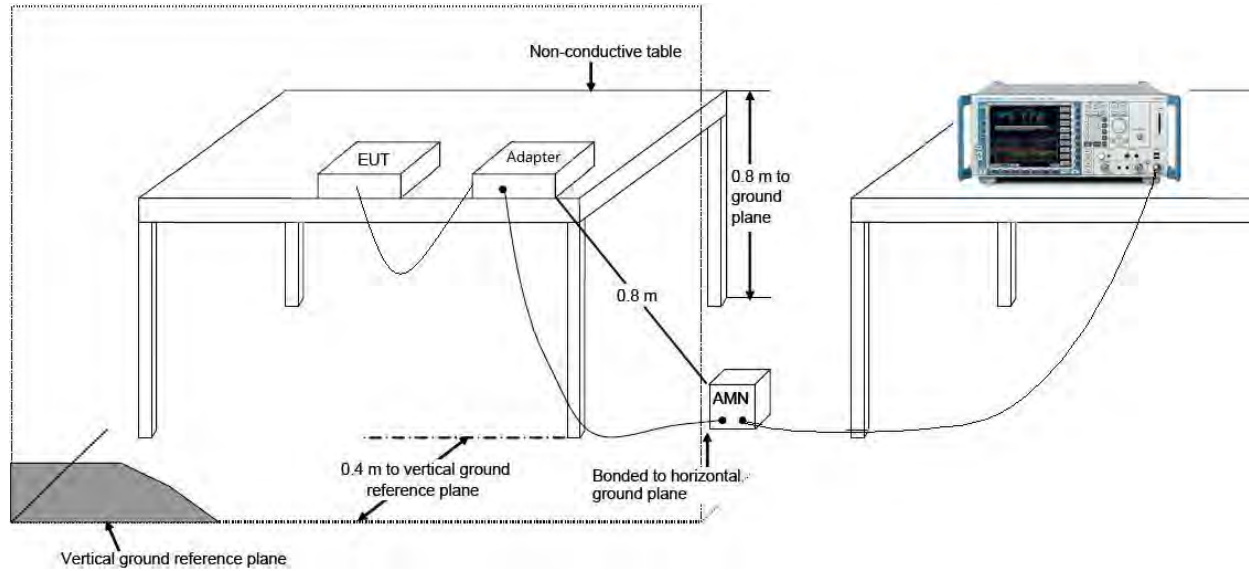

7.10.4. Test Result

EUT	Handheld terminal	Test Date	2017/10/24
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Line1	Site / Engineer	SR2 / Kevin
Test Mode	MODE2	Test Voltage	AC120V/60Hz

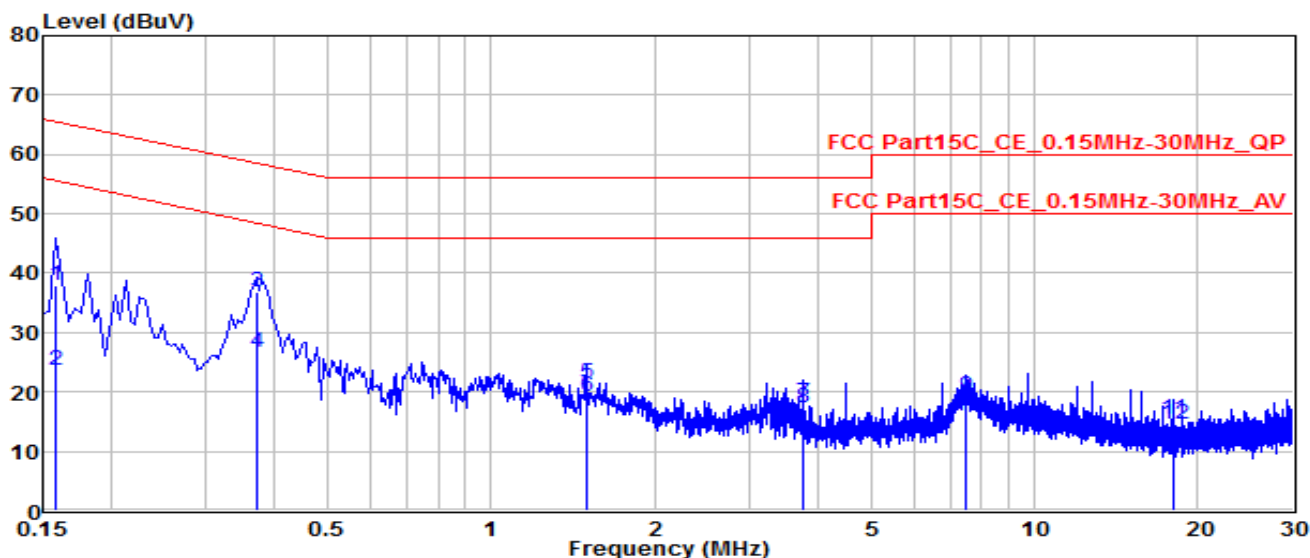


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.159	27.87	10.03	37.9	-27.62	65.52	QP
2		0.159	13.56	10.03	23.59	-31.93	55.52	Average
3	*	0.37048	26.73	10.02	36.75	-21.74	58.49	QP
4	*	0.37048	16.74	10.02	26.76	-21.73	48.49	Average
5		1.5	11.65	9.88	21.53	-34.47	56	QP
6		1.5	9.36	9.88	19.24	-26.76	46	Average
7		3.75	8.23	9.8	18.03	-37.97	56	QP
8		3.75	7.42	9.8	17.22	-28.78	46	Average
9		7.502	9.49	9.79	19.28	-40.72	60	QP
10		7.502	6.22	9.79	16.01	-33.99	50	Average
11		18	5.53	9.99	15.52	-44.48	60	QP
12		18	4.64	9.99	14.63	-35.37	50	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB) .
3. Measurement (dBuV/m) = Reading(dBuV/m)+ C.F (Correction Factor) .
4. Other mode was also verified. The test results shown represent the worst case emissions .

EUT	Handheld terminal	Test Date	2017/10/24
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Neutral	Site / Engineer	SR2 / Kevin
Test Mode	MODE2	Test Voltage	AC120V/60Hz

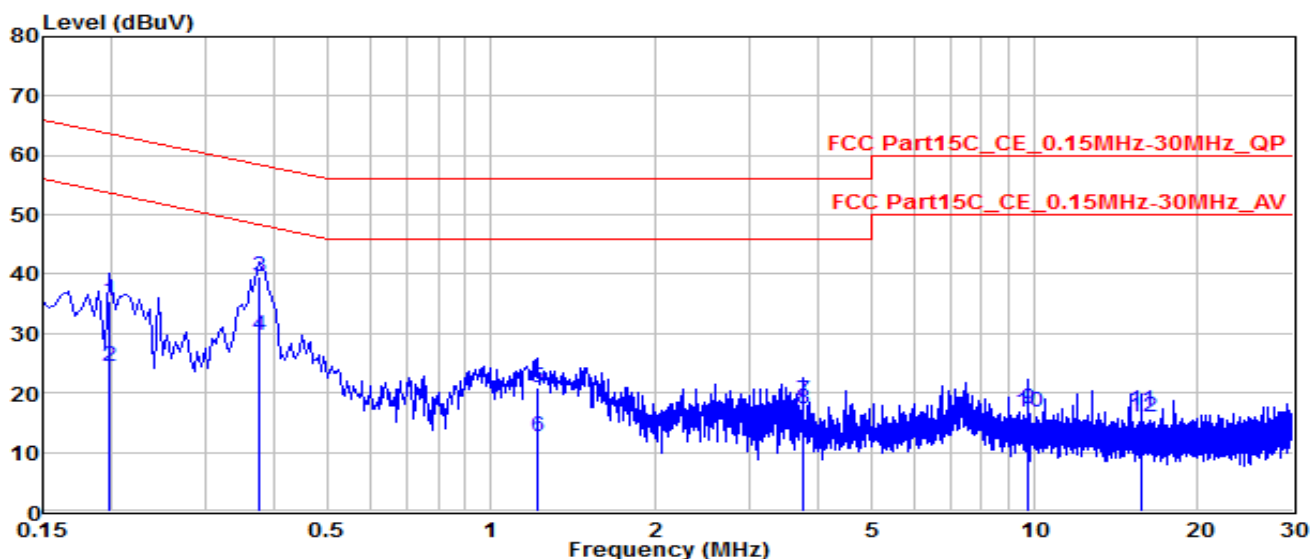

No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.1995	25.56	9.93	35.49	-28.14	63.63	QP
2		0.1995	14.53	9.93	24.46	-29.17	53.63	Average
3	*	0.37498	29.53	10.04	39.57	-18.82	58.39	QP
4	*	0.37498	19.73	10.04	29.77	-18.62	48.39	Average
5		1.216	11.15	9.87	21.02	-34.98	56	QP
6		1.216	2.66	9.87	12.53	-33.47	46	Average
7		3.75	8.82	9.81	18.63	-37.37	56	QP
8		3.75	7.46	9.81	17.27	-28.73	46	Average
9		9.748	7.48	9.86	17.34	-42.66	60	QP
10		9.748	6.9	9.86	16.76	-33.24	50	Average
11		15.75	6.93	10.01	16.94	-43.06	60	QP
12		15.75	6.04	10.01	16.05	-33.95	50	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB) .
- Measurement (dBuV/m) = Reading(dBuV/m)+ C.F (Correction Factor) .
- Other channel was also verified. The test results shown represent the worst case emissions.

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Handheld terminal FCC ID:**

HLEHT1BTN, Model Number: HT1 is in compliance with Part 15E of the FCC Rules & IC Rules.

_____ The End _____