


EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

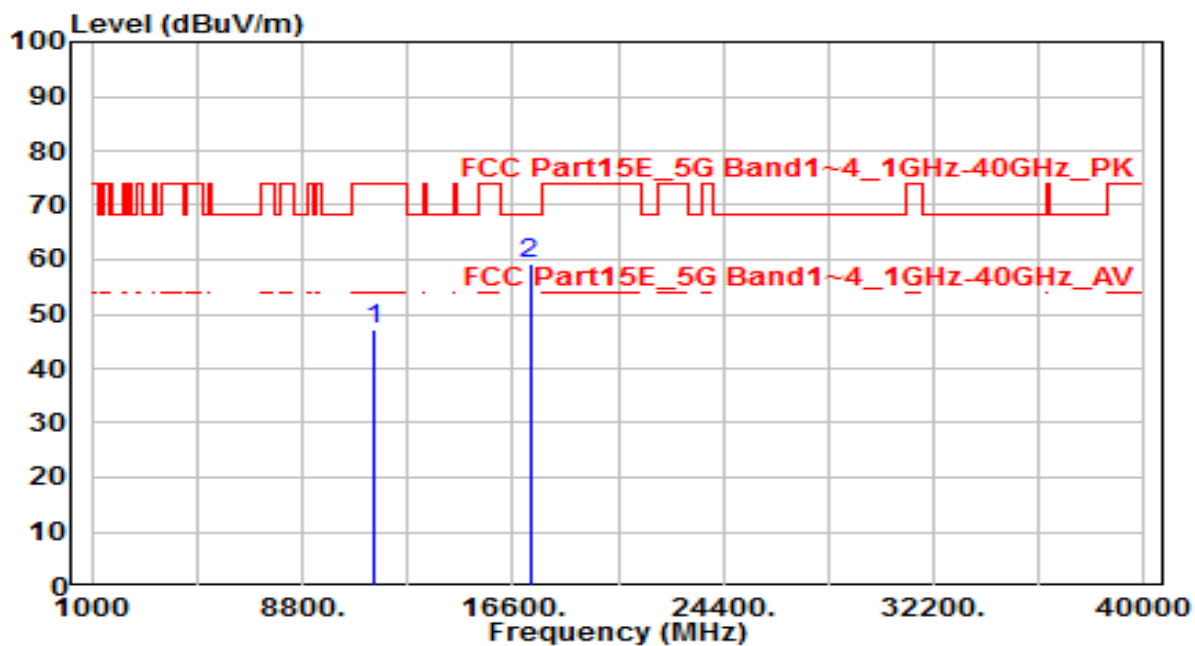


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	28.56	18.44	47.00	-27.00	74.00	150	0	Peak
2	* 17235.000	31.23	27.97	59.21	-8.99	68.20	150	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

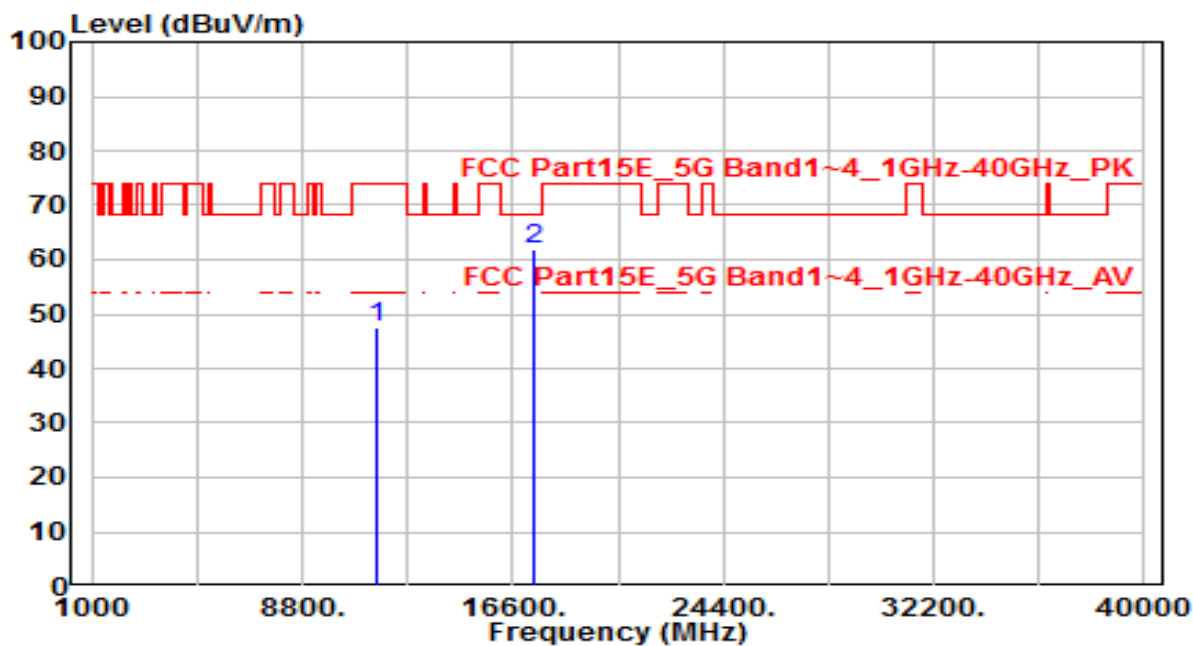


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	29.32	18.36	47.68	-26.32	74.00	150	0	Peak
2	* 17355.000	32.88	29.18	62.06	-6.14	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

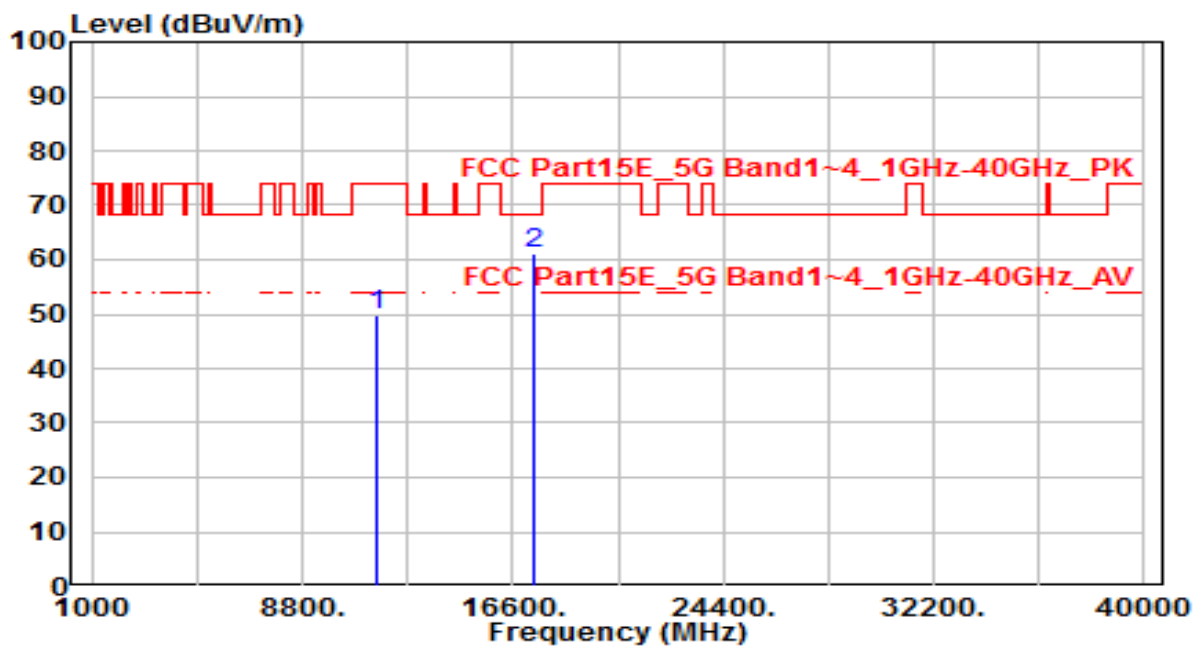


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.40	18.36	49.77	-24.23	74.00	150	0	Peak
2	* 17355.000	31.92	29.18	61.10	-7.10	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

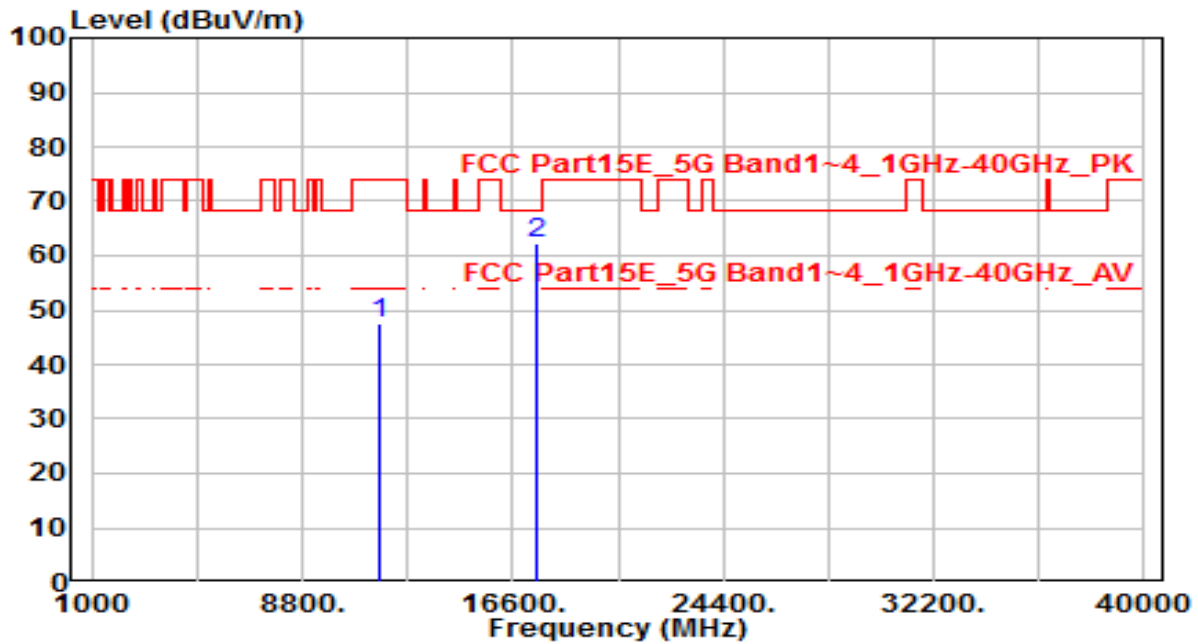


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.45	18.26	47.71	-26.29	74.00	150	0	Peak
2	* 17475.000	31.97	30.39	62.35	-5.85	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

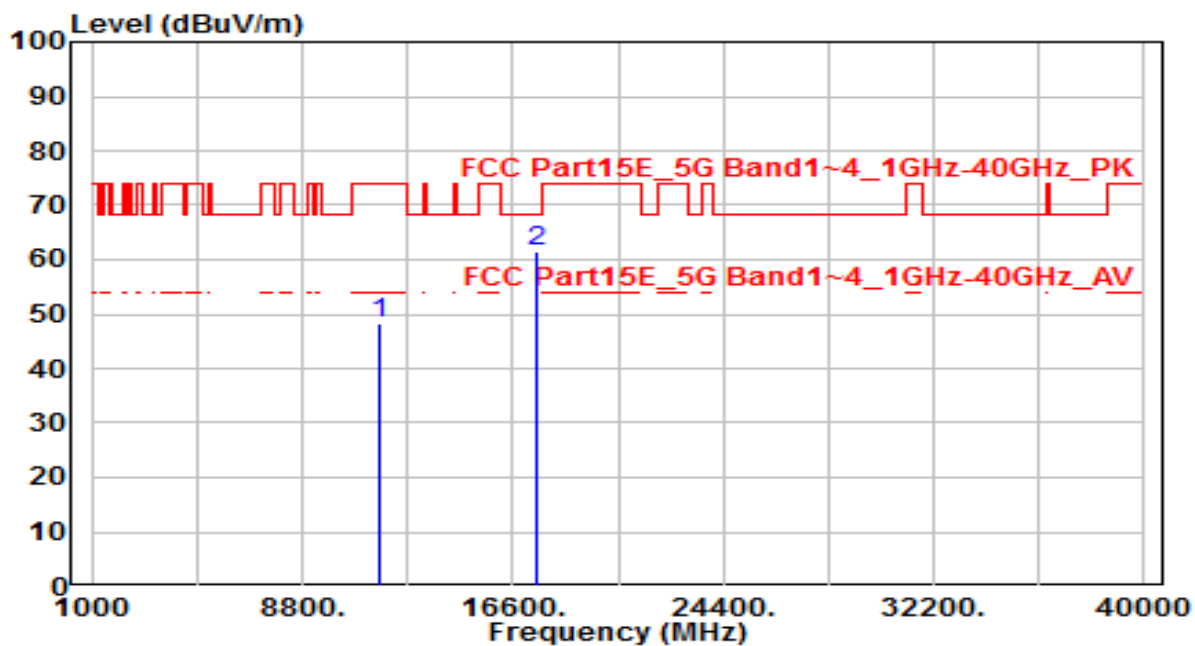


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.96	18.26	48.22	-25.78	74.00	150	0	Peak
2	* 17475.000	31.31	30.39	61.70	-6.50	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

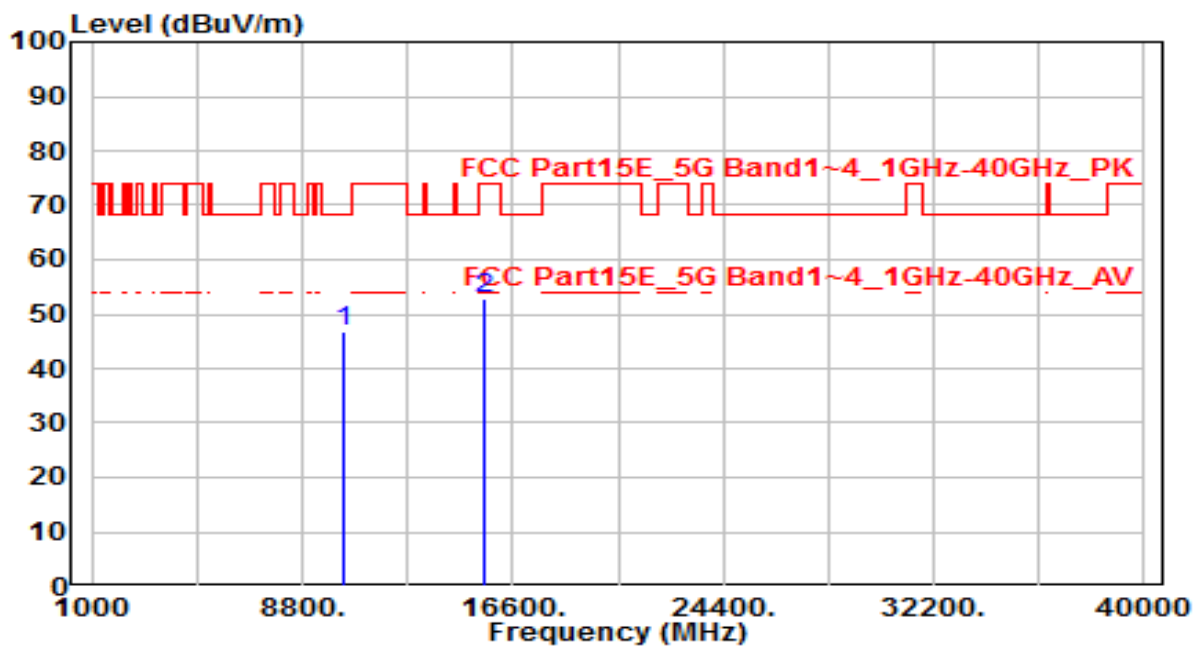


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10380.000	30.01	16.66	46.67	-21.53	68.20	150	0	Peak
2	* 15570.000	31.68	21.33	53.02	-20.98	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

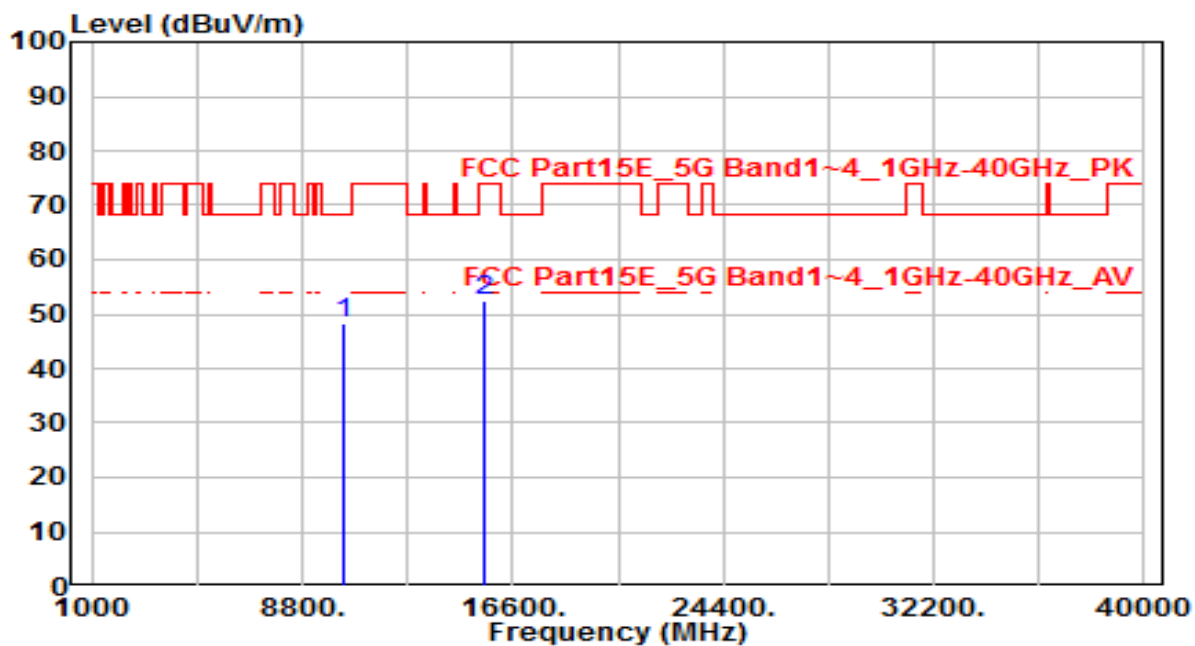


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	31.62	16.66	48.28	-19.92	68.20	150	0	Peak
2	15570.000	31.23	21.33	52.57	-21.43	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

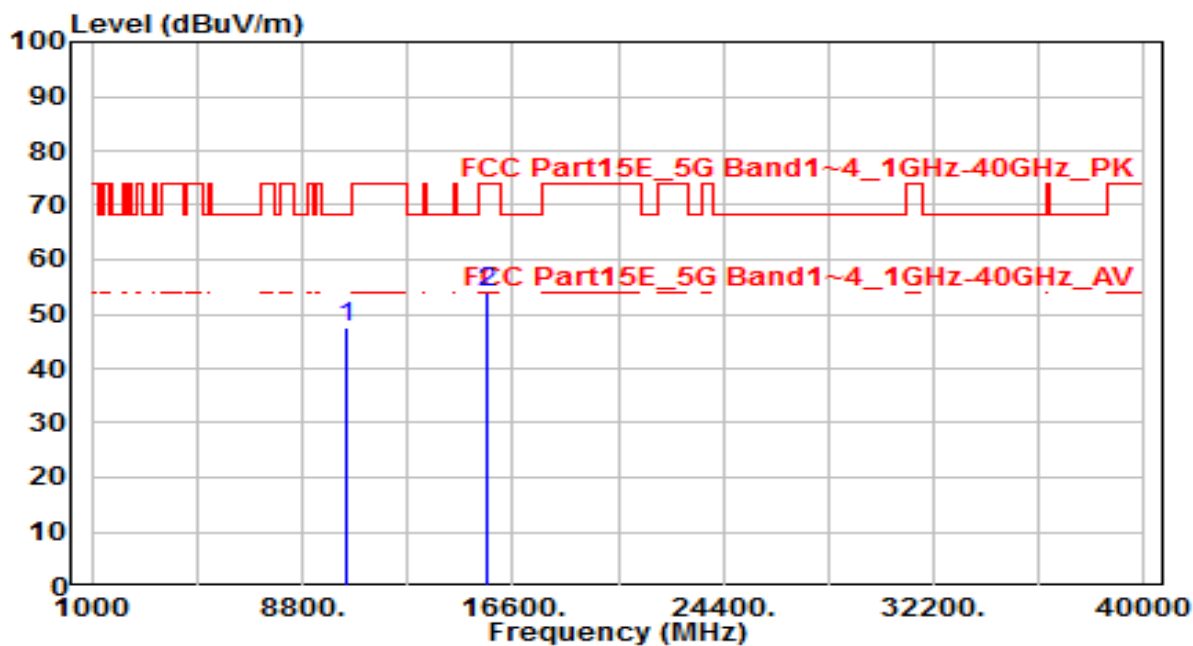


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	30.48	16.93	47.42	-20.78	68.20	150	0	Peak
2	* 15690.000	32.69	21.13	53.82	-20.18	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

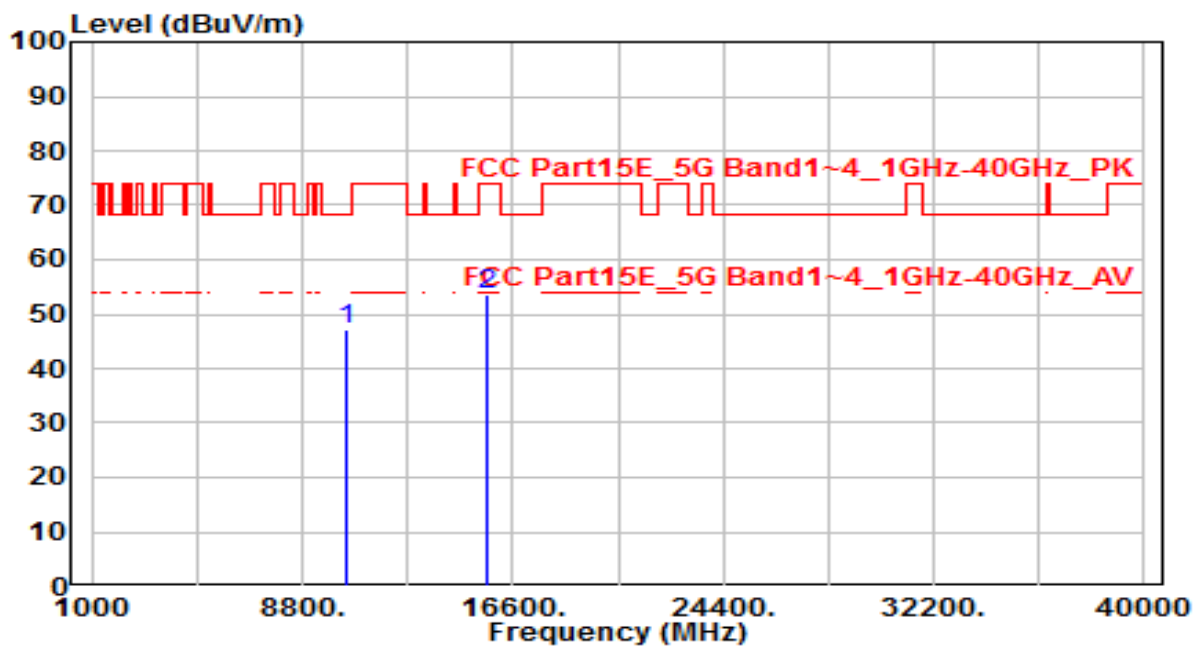


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10460.000	30.24	16.93	47.17	-21.03	68.20	150	0	Peak
2	* 15690.000	32.63	21.13	53.76	-20.24	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

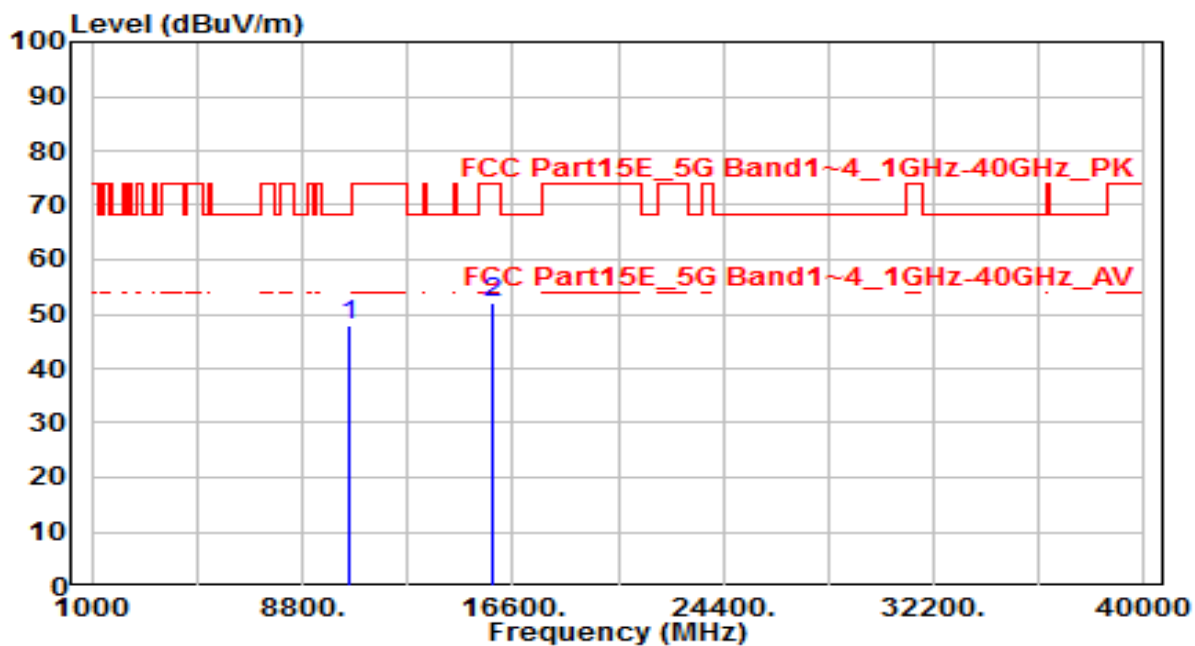


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	30.66	17.13	47.79	-20.41	68.20	150	0	Peak
2	15810.000	31.17	20.93	52.10	-21.90	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

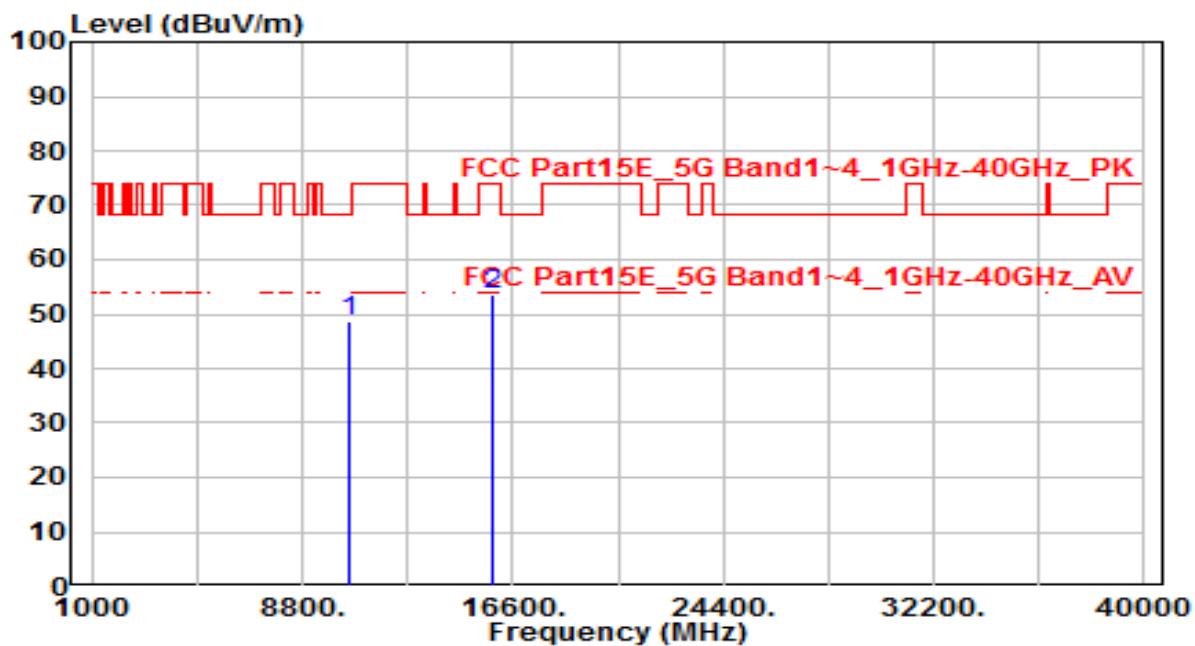


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	31.58	17.13	48.71	-19.49	68.20	150	0	Peak
2	15810.000	32.60	20.93	53.53	-20.47	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

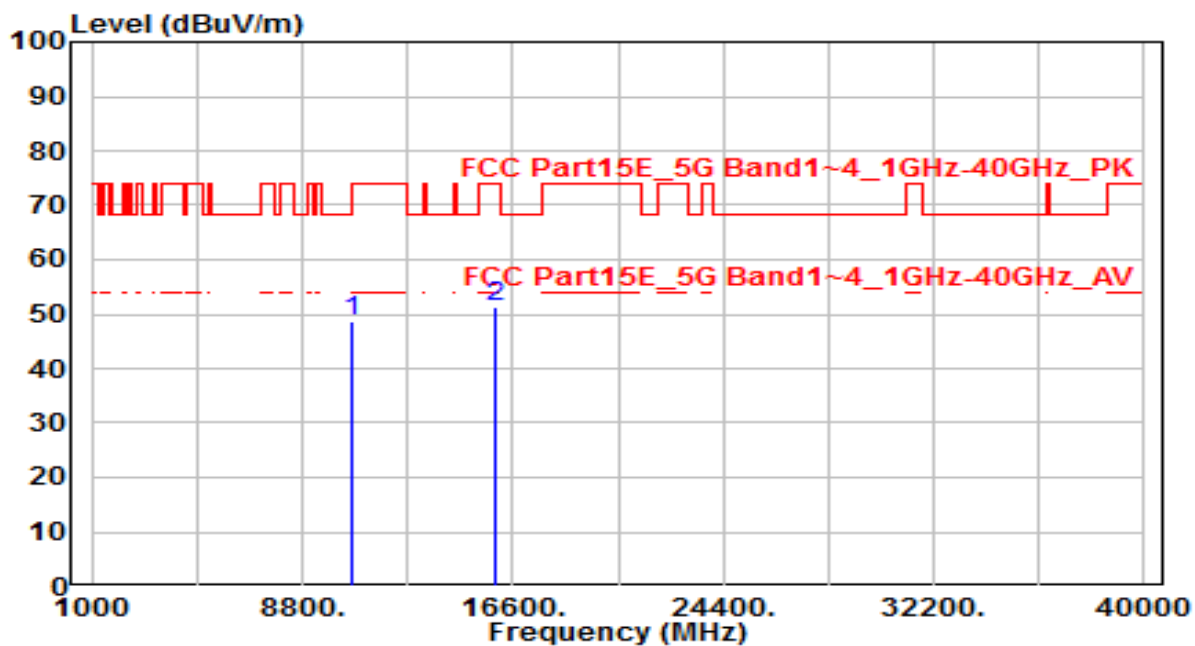


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.52	17.24	48.76	-25.24	74.00	150	0	Peak
2	* 15930.000	30.75	20.73	51.48	-22.52	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

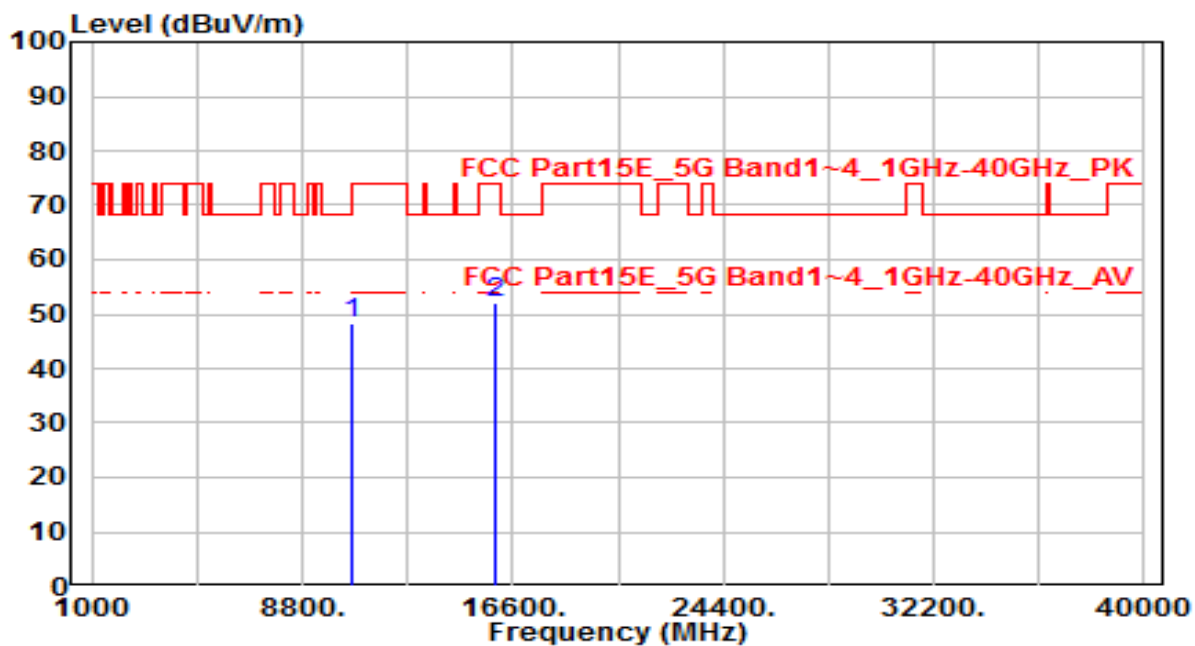


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.13	17.24	48.37	-25.63	74.00	150	0	Peak
2	* 15930.000	31.44	20.73	52.17	-21.83	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

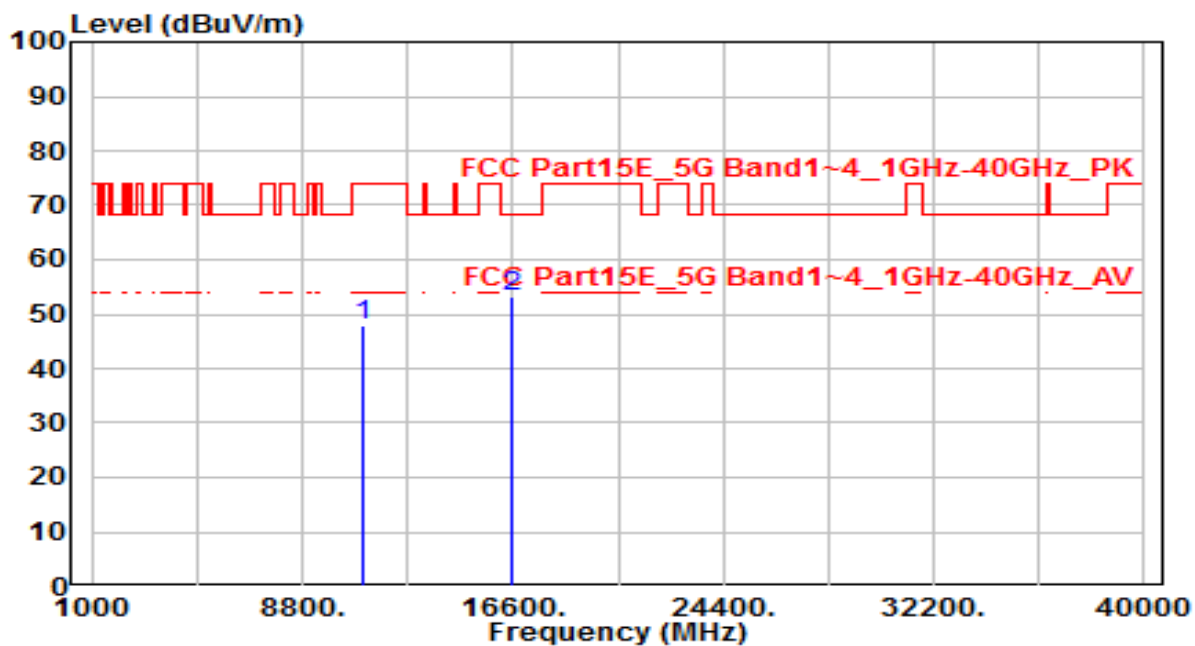


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	30.10	17.81	47.91	-26.09	74.00	150	0	Peak
2	* 16530.000	31.04	22.18	53.22	-14.98	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

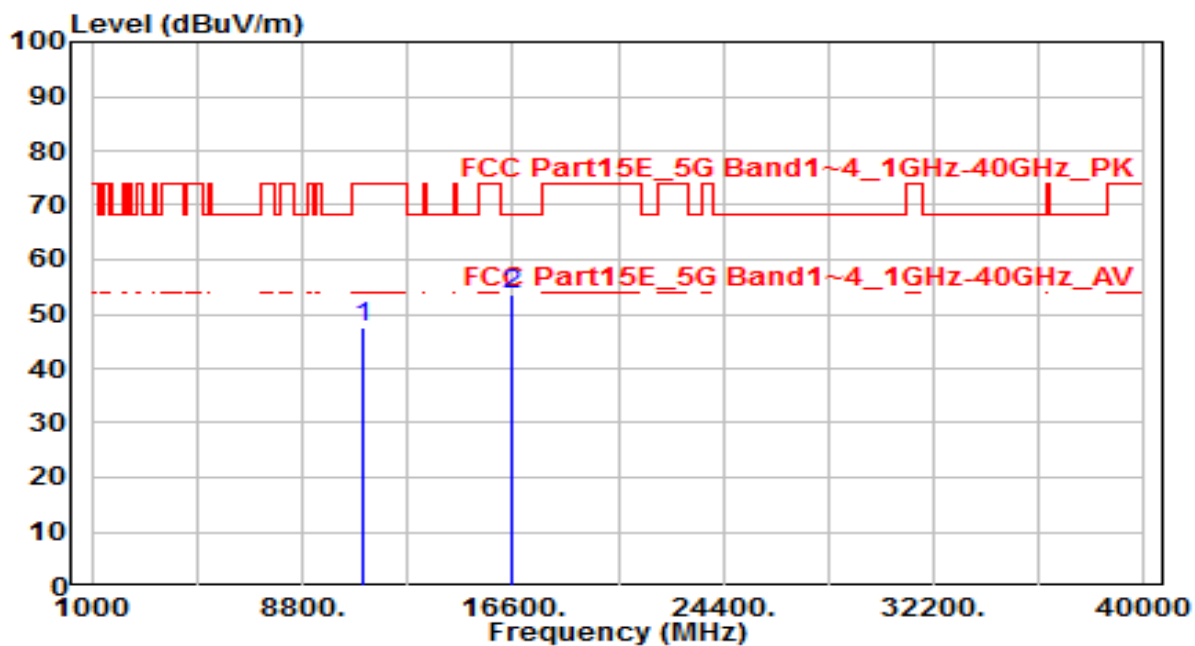


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	29.72	17.81	47.53	-26.47	74.00	150	0	Peak
2	* 16530.000	31.29	22.18	53.47	-14.73	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

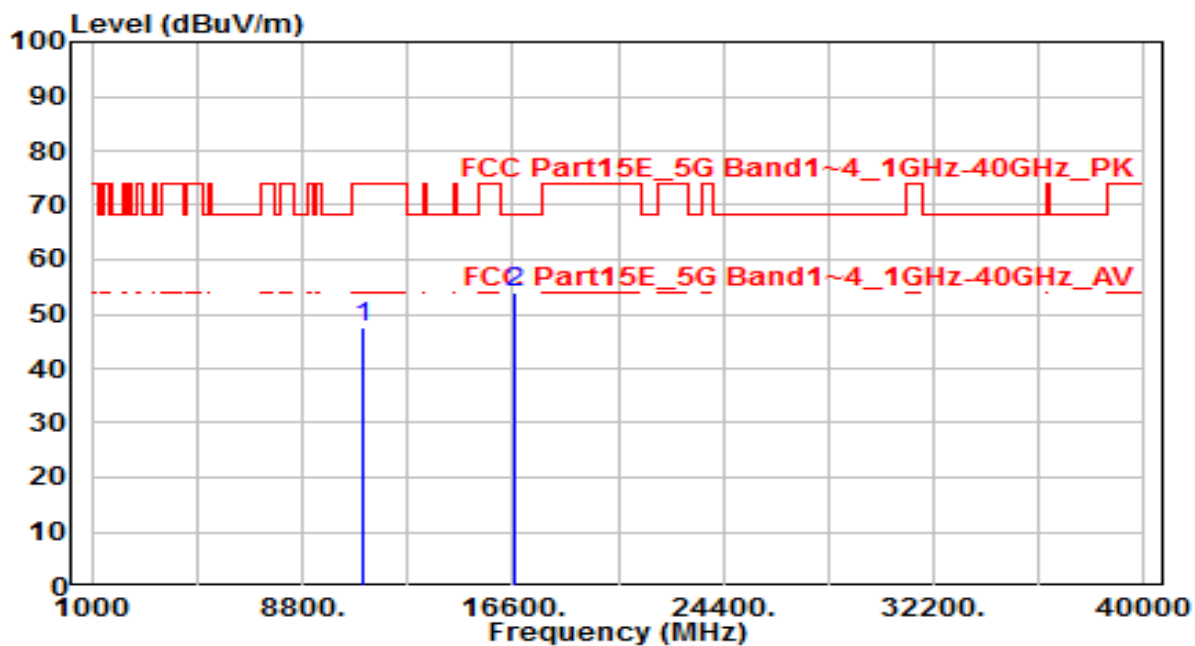


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	29.64	17.91	47.55	-26.45	74.00	150	0	Peak
2	* 16650.000	30.96	23.06	54.02	-14.18	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

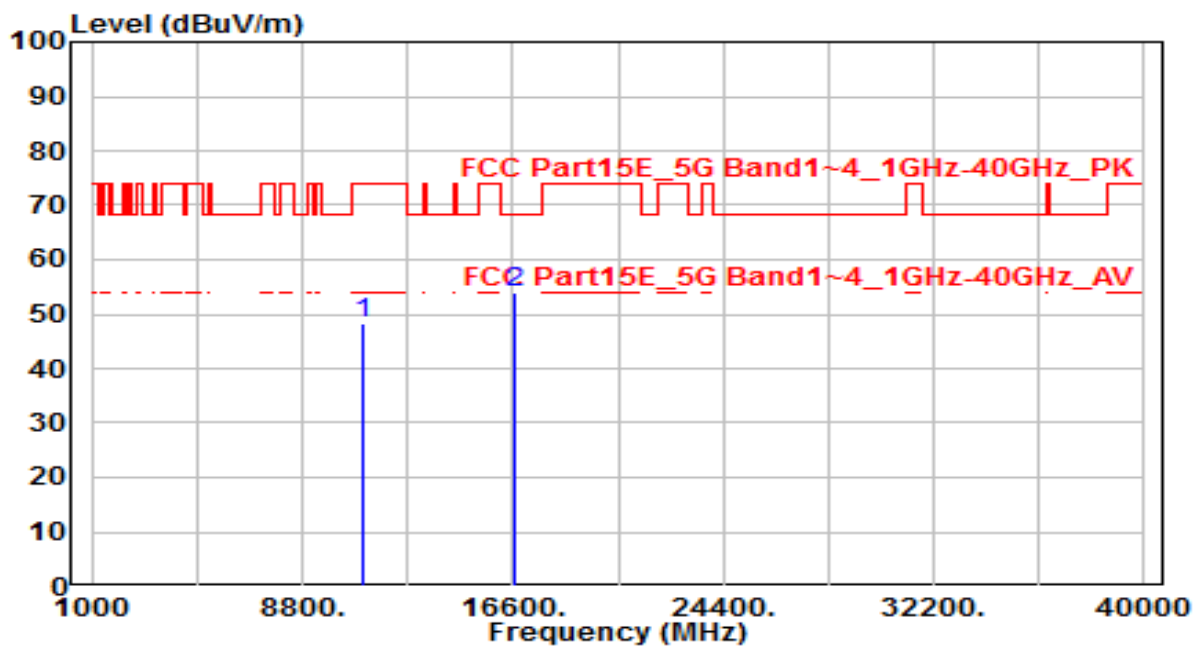


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	30.31	17.91	48.23	-25.77	74.00	150	0	Peak
2	* 16650.000	31.01	23.06	54.07	-14.13	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

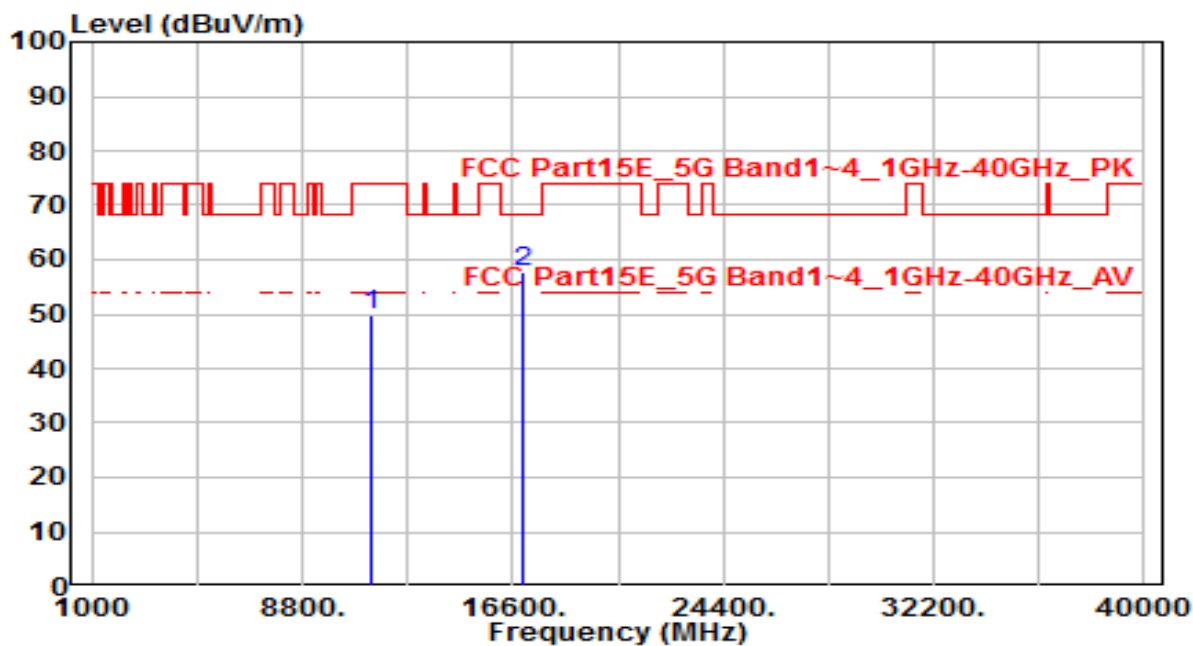


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	31.60	18.24	49.84	-24.16	74.00	150	0	Peak
2	* 17010.000	31.89	25.71	57.60	-10.60	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

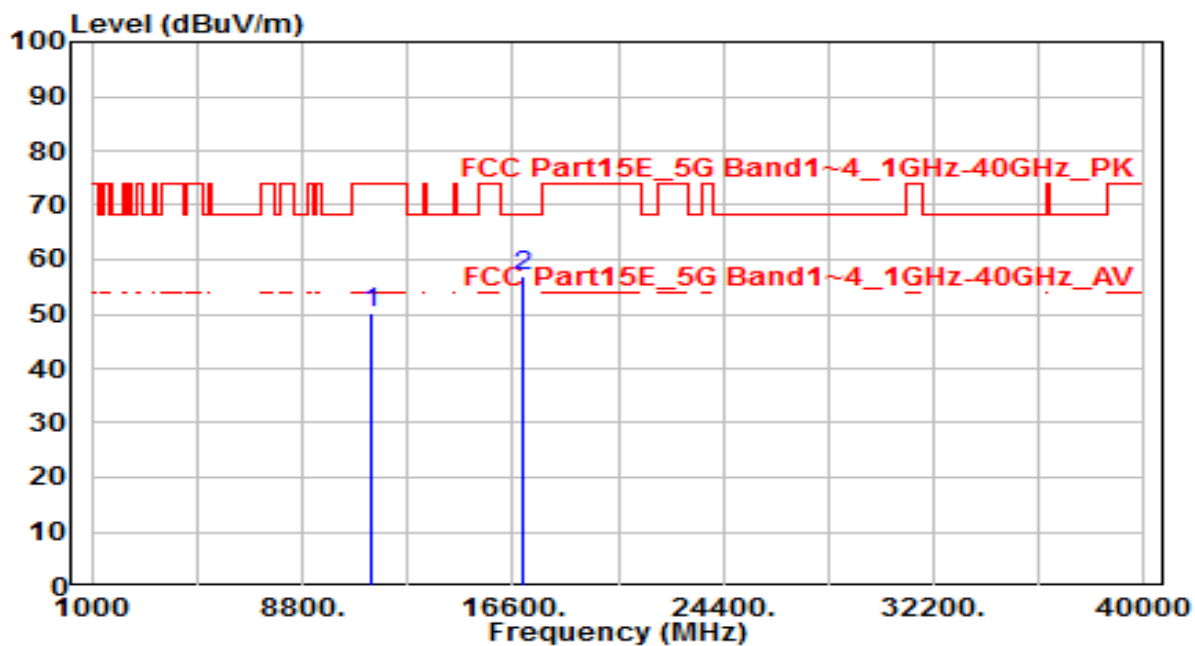


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	31.80	18.24	50.04	-23.96	74.00	150	0	Peak
2	* 17010.000	31.17	25.71	56.88	-11.32	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

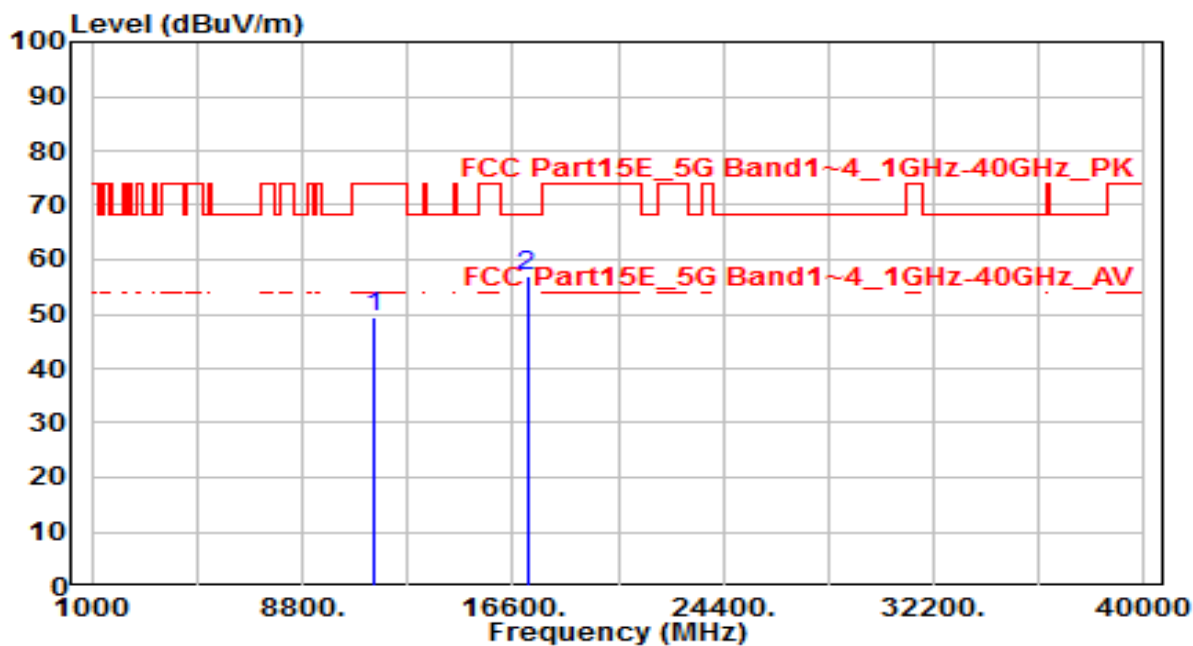


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	30.98	18.34	49.32	-24.68	74.00	150	0	Peak
2	* 17130.000	30.09	26.92	57.00	-11.20	68.20	150	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

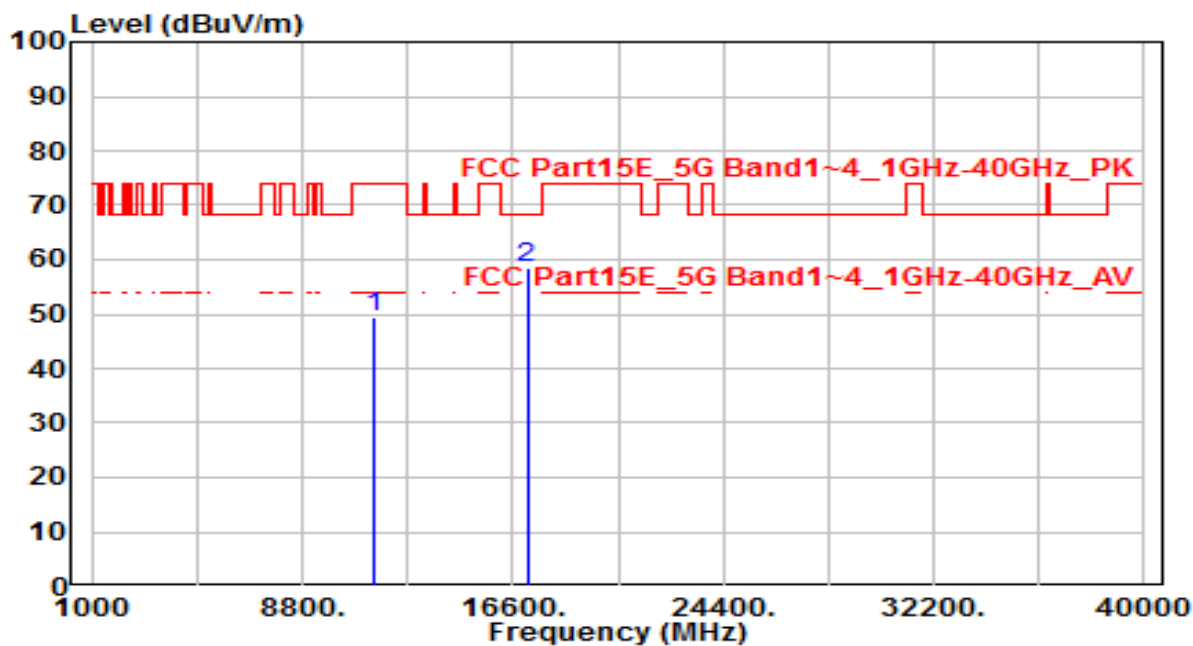


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	31.13	18.34	49.48	-24.52	74.00	150	0	Peak
2	* 17130.000	31.38	26.92	58.30	-9.90	68.20	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

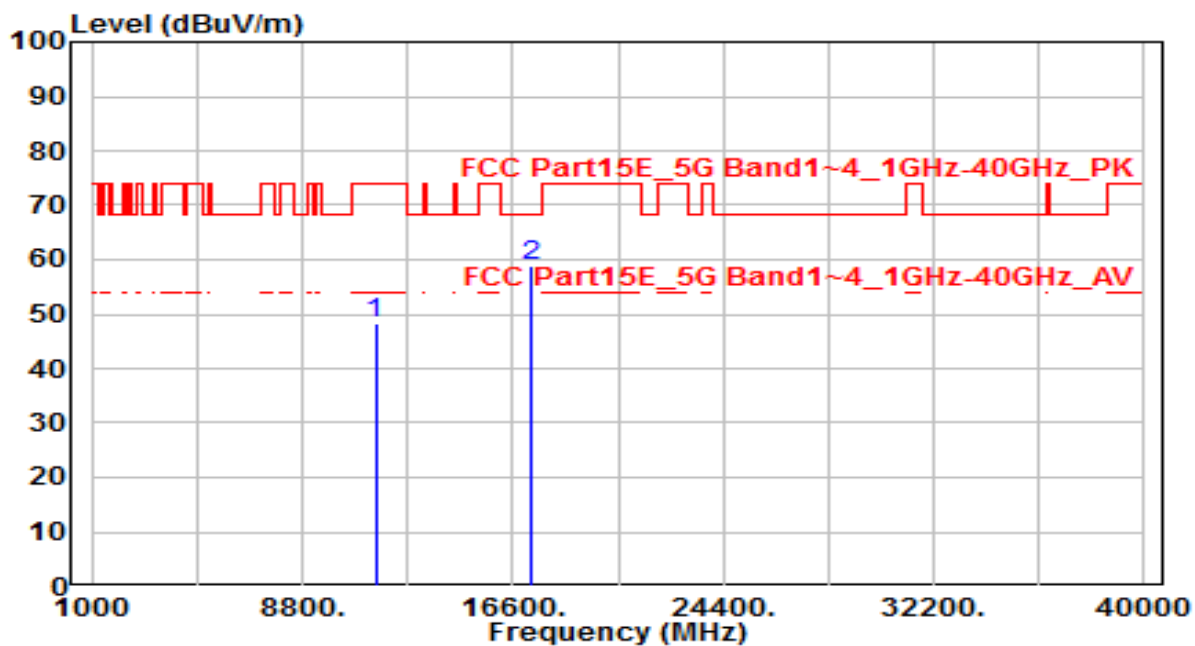


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	30.04	18.44	48.48	-25.52	74.00	150	0	Peak
2	* 17265.000	30.74	28.28	59.02	-9.18	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

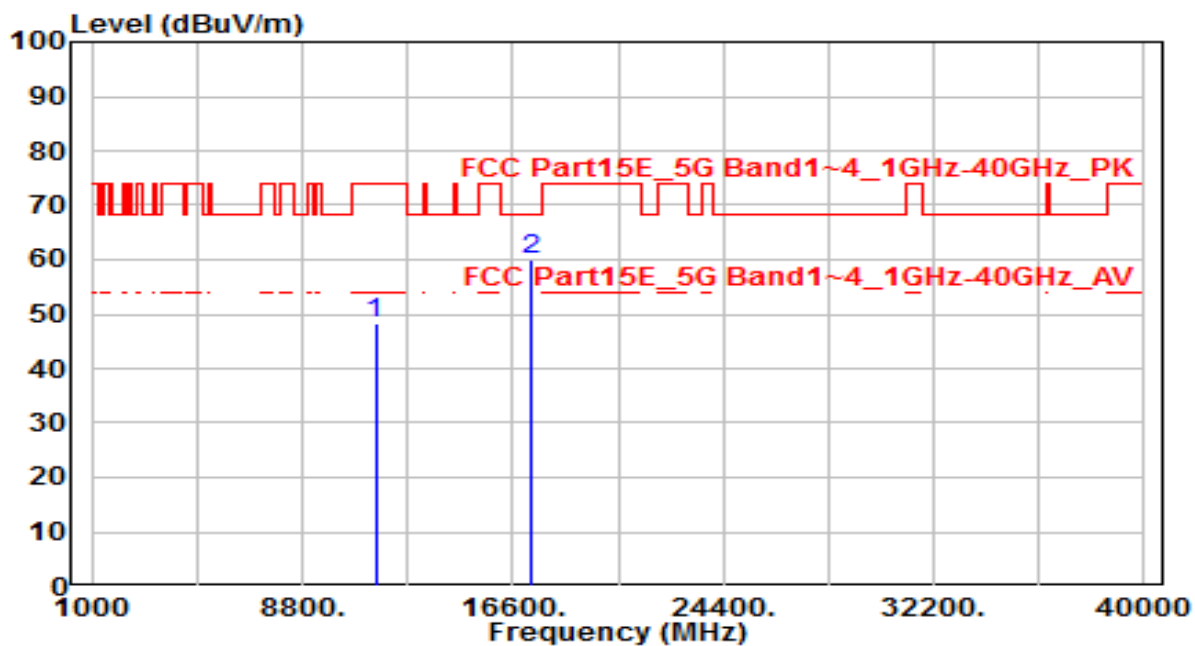


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	29.82	18.44	48.26	-25.74	74.00	150	0	Peak
2	* 17265.000	31.70	28.28	59.97	-8.23	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

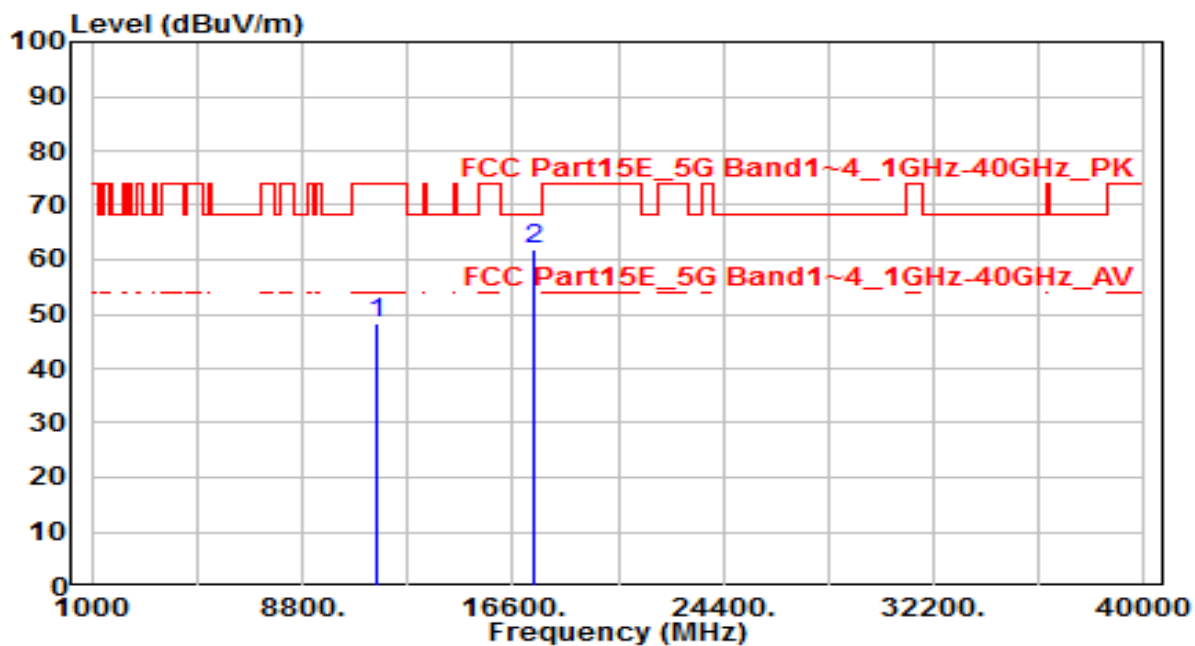


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	30.00	18.34	48.33	-25.67	74.00	150	0	Peak
2	* 17385.000	32.37	29.48	61.86	-6.34	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

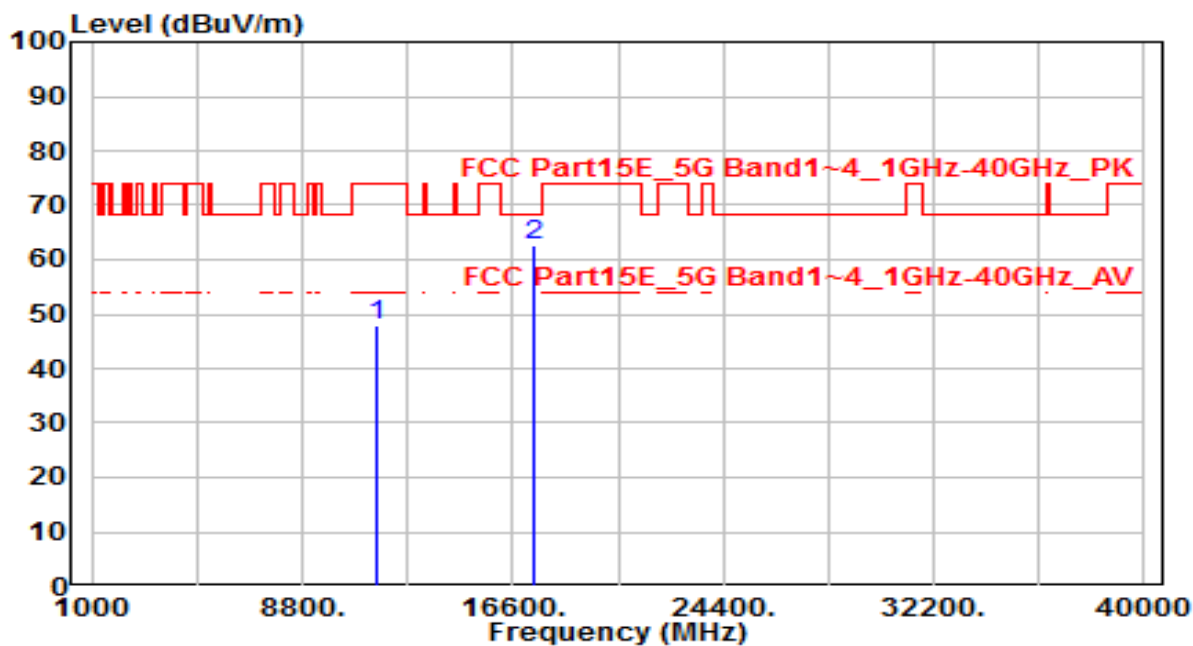


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	29.66	18.34	48.00	-26.00	74.00	150	0	Peak
2	* 17385.000	33.18	29.48	62.66	-5.54	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

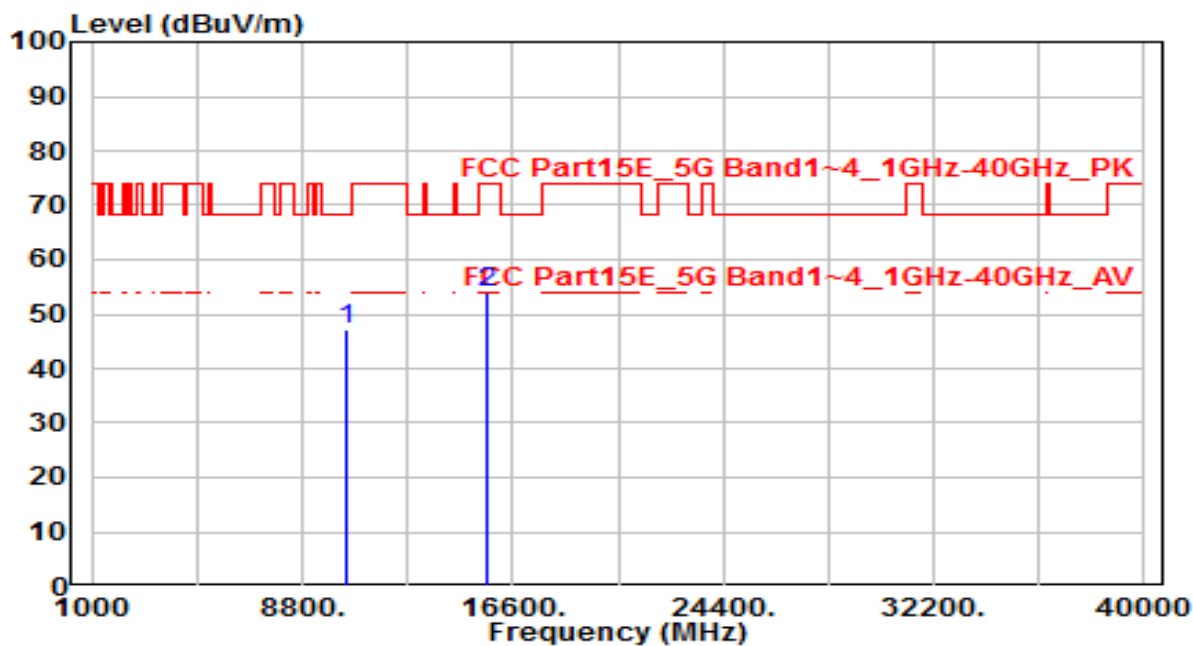


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10420.000	30.44	16.80	47.24	-20.96	68.20	150	0	Peak
2	* 15630.000	32.76	21.23	53.99	-20.01	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

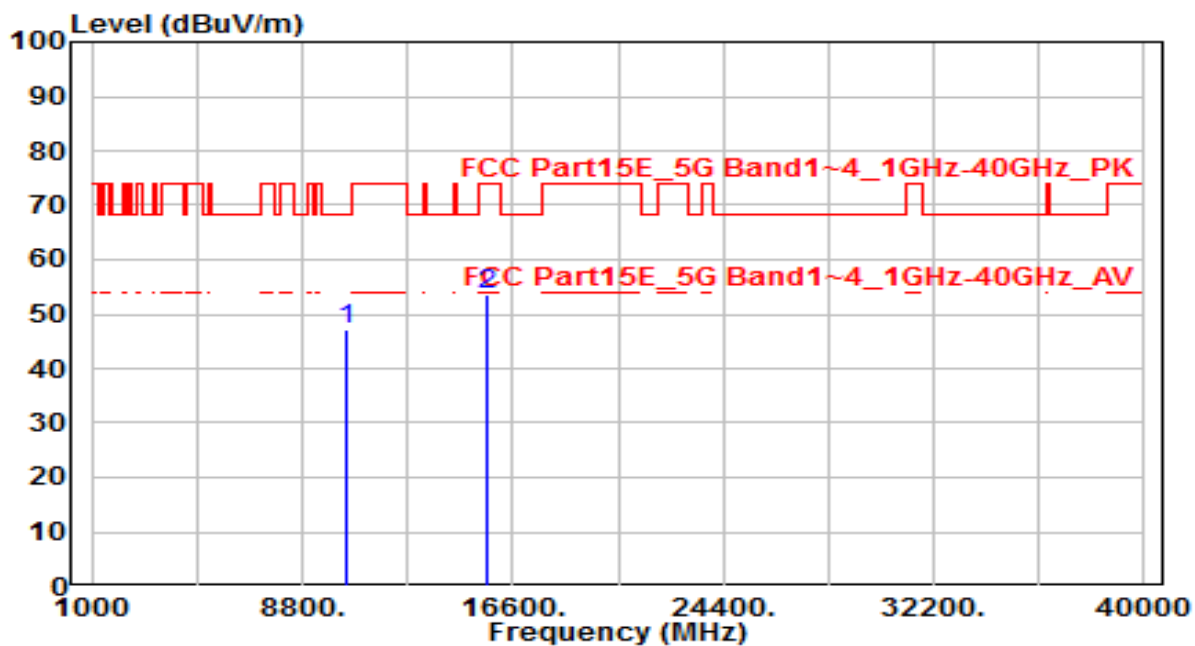


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10420.000	30.21	16.80	47.01	-21.19	68.20	150	0	Peak
2	* 15630.000	32.53	21.23	53.76	-20.24	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

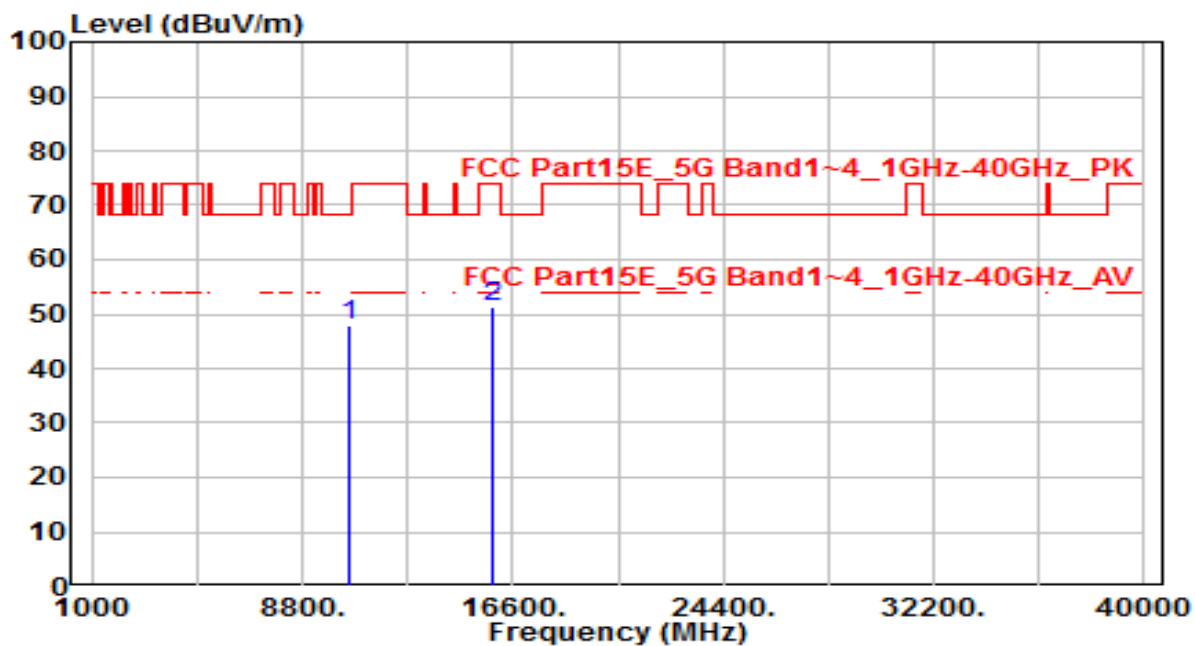


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	30.70	17.18	47.89	-20.31	68.20	150	0	Peak
2	15870.000	30.58	20.83	51.40	-22.60	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

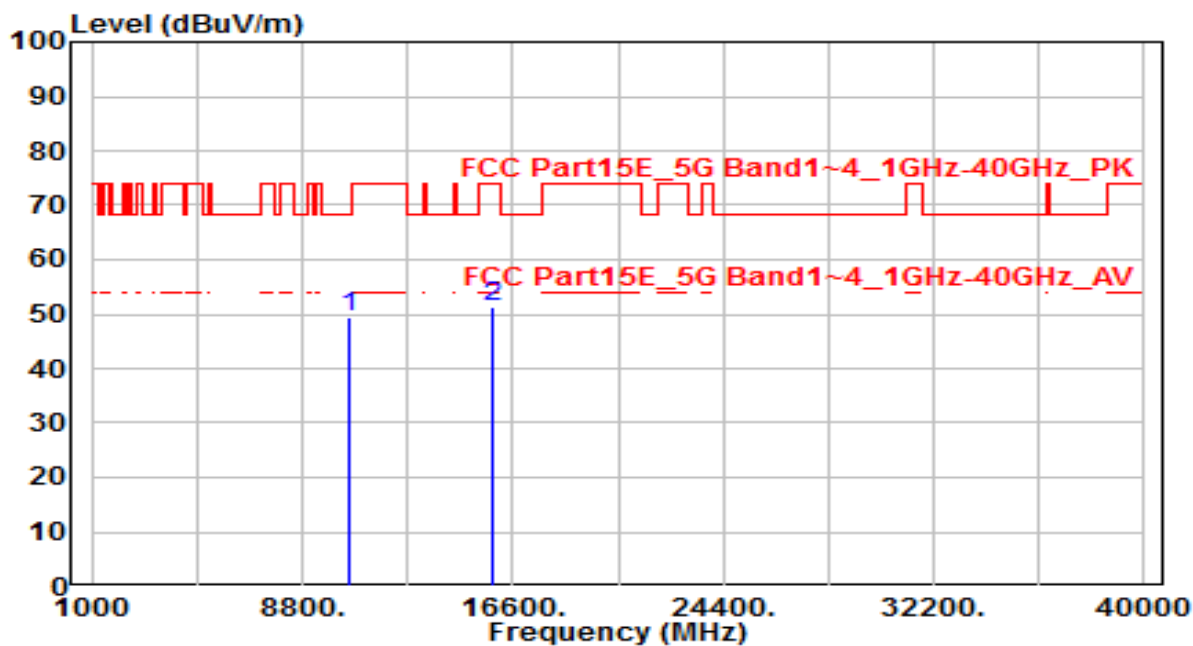


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	32.41	17.18	49.60	-18.60	68.20	150	0	Peak
2	15870.000	30.37	20.83	51.19	-22.81	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

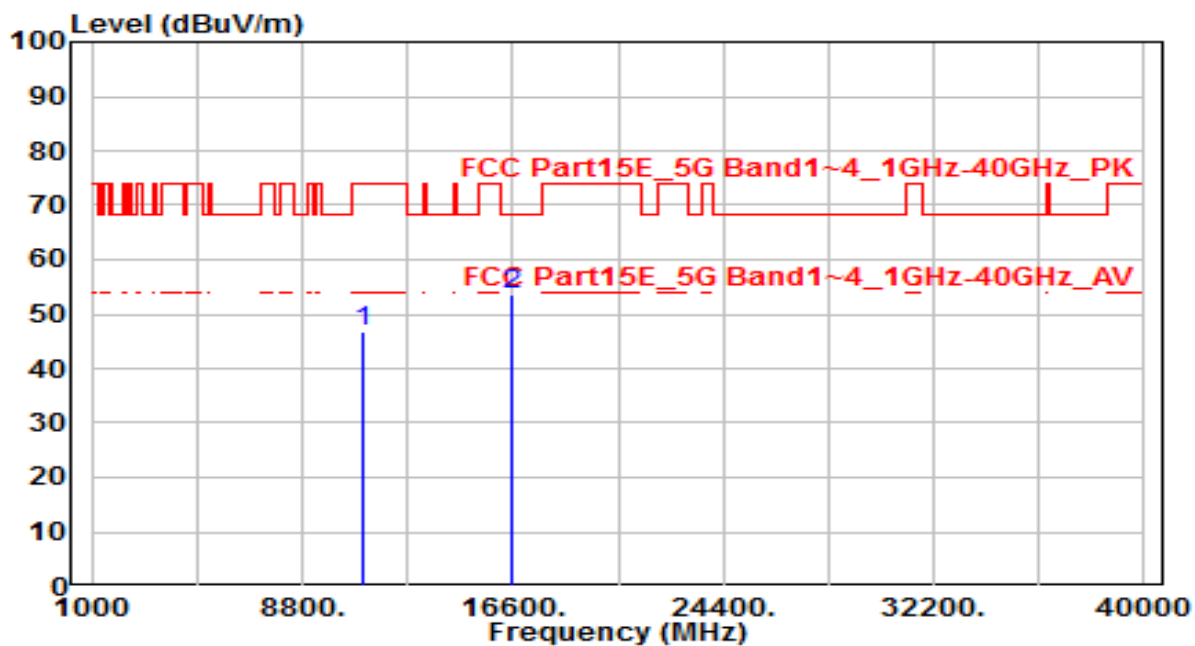


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	29.10	17.86	46.96	-27.04	74.00	150	0	Peak
2	* 16590.000	30.90	22.62	53.51	-14.69	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

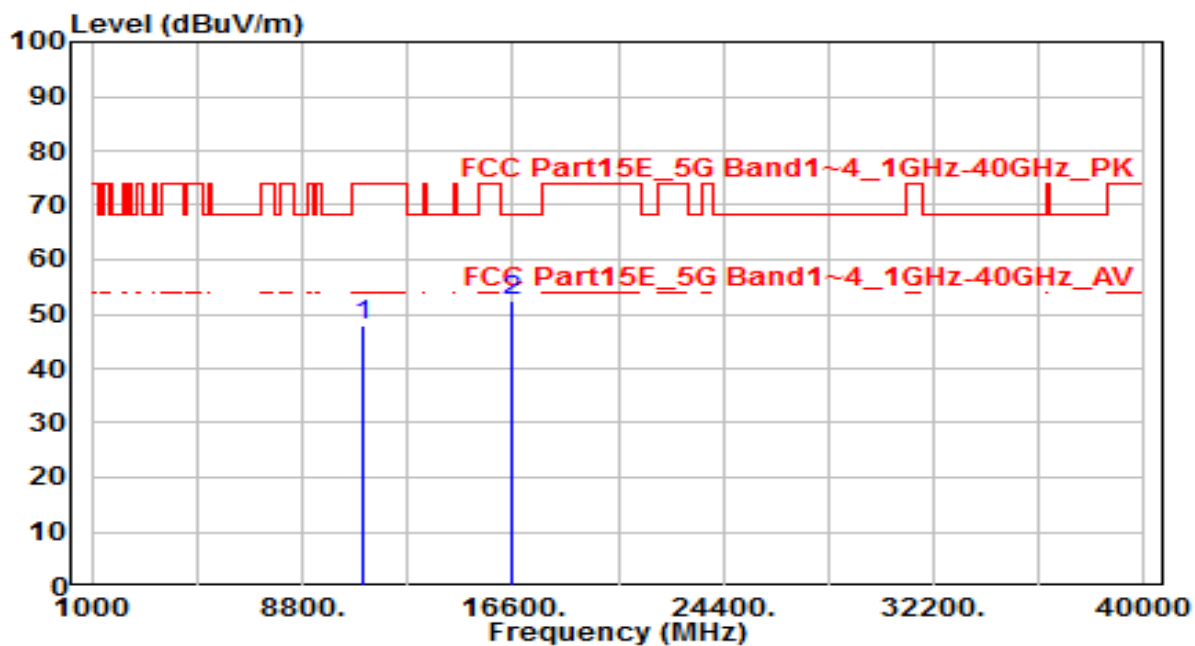


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	30.12	17.86	47.98	-26.02	74.00	150	0	Peak
2	* 16590.000	29.79	22.62	52.41	-15.79	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

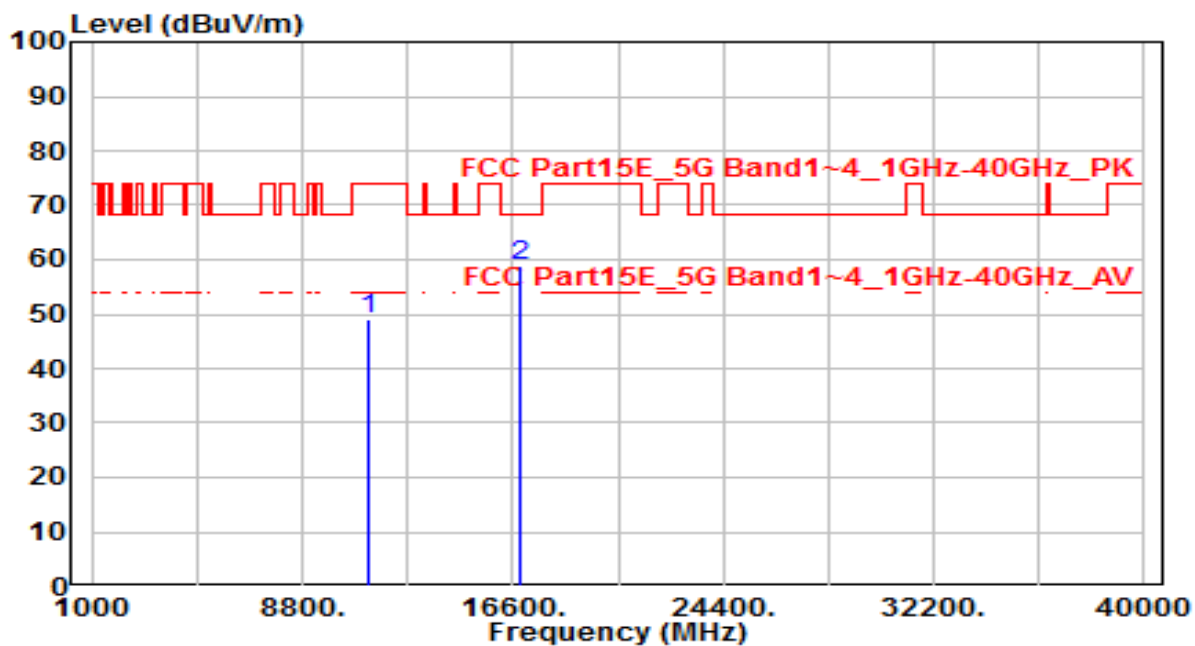


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	31.07	18.07	49.15	-24.85	74.00	150	0	Peak
2	* 16830.000	34.45	24.37	58.82	-9.38	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

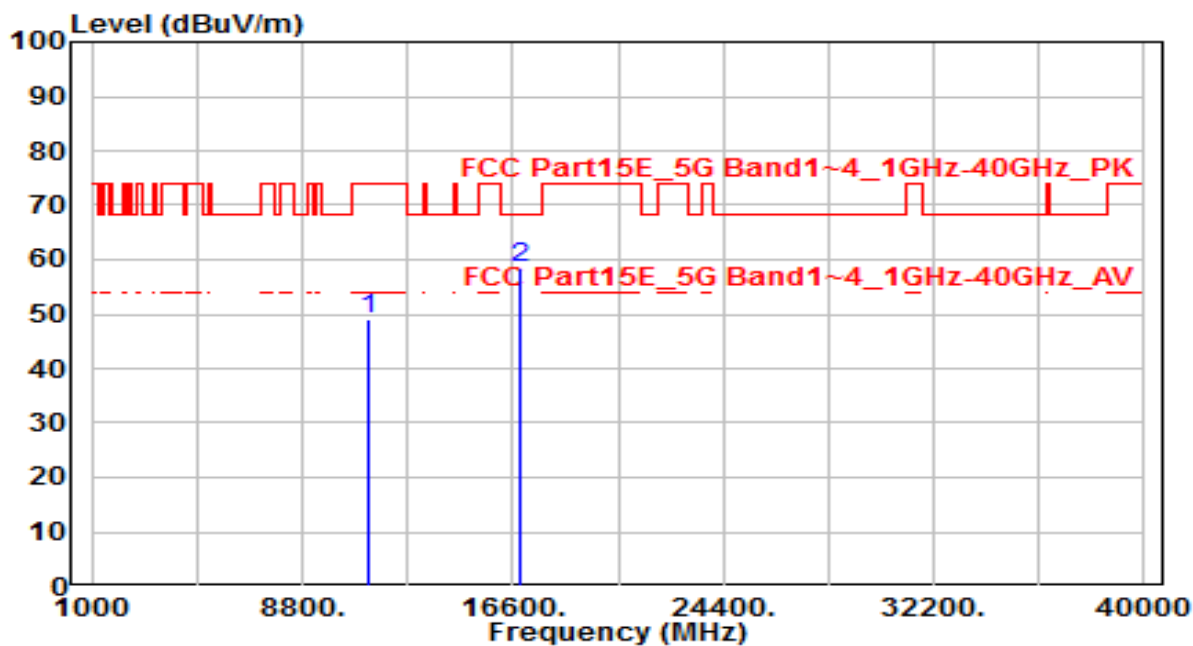


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	31.08	18.07	49.15	-24.85	74.00	150	0	Peak
2	* 16830.000	34.10	24.37	58.47	-9.73	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

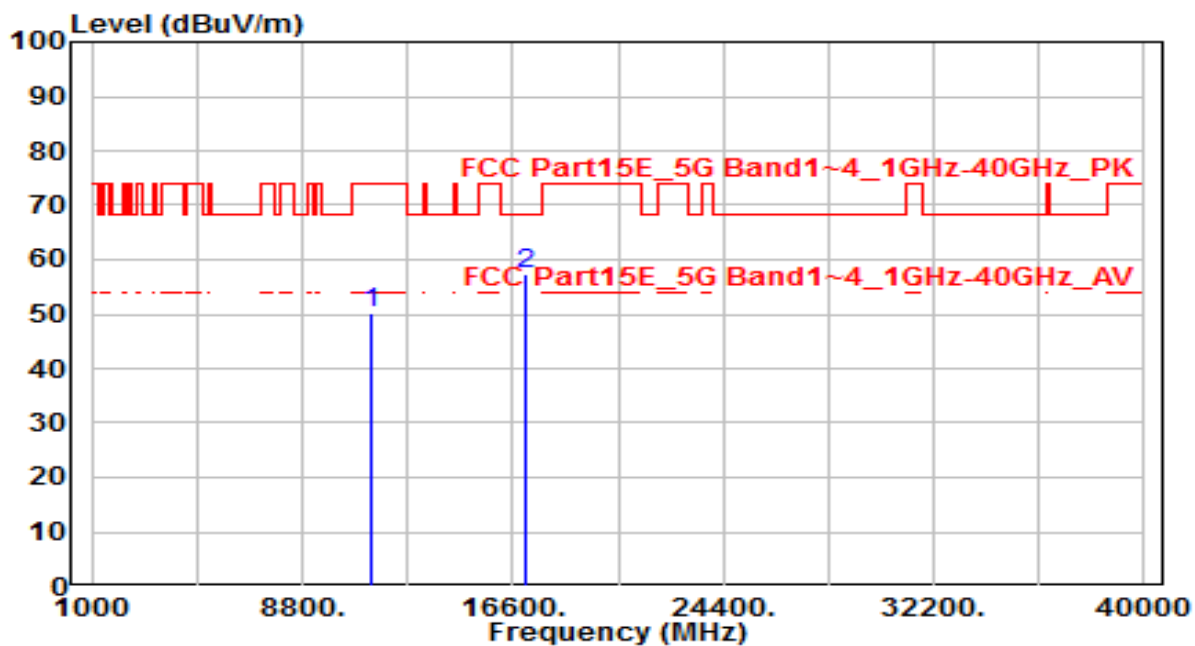


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	32.05	18.29	50.34	-23.66	74.00	150	0	Peak
2	* 17070.000	30.92	26.31	57.24	-10.96	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

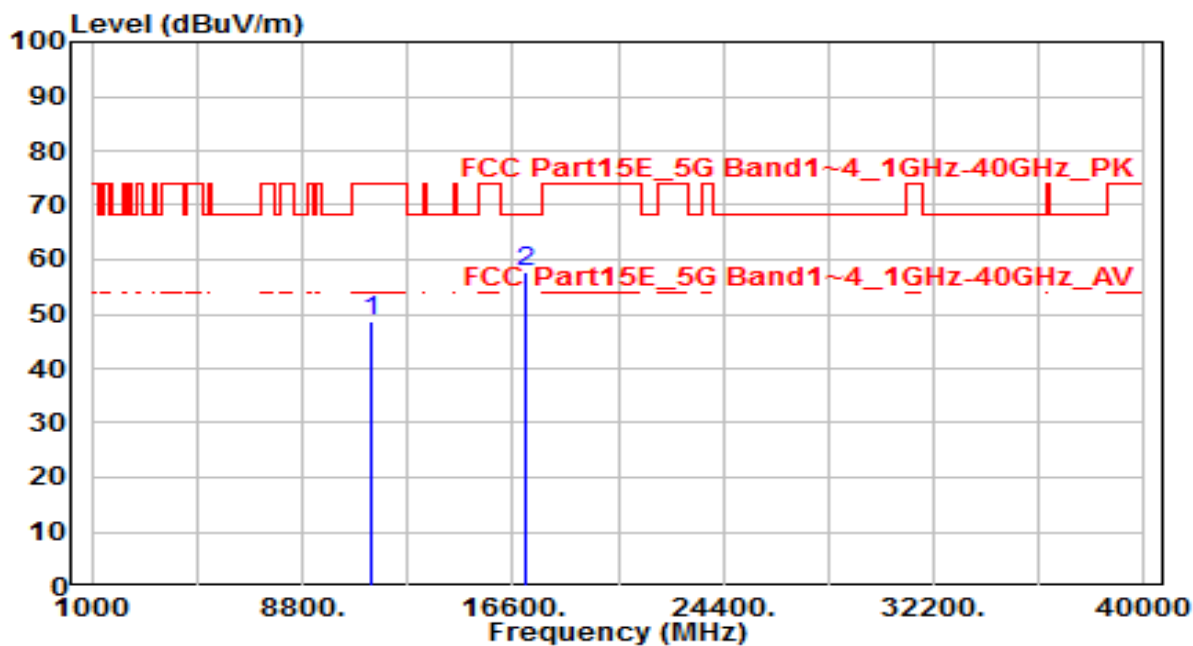


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	30.55	18.29	48.84	-25.16	74.00	150	0	Peak
2	* 17070.000	31.25	26.31	57.57	-10.63	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

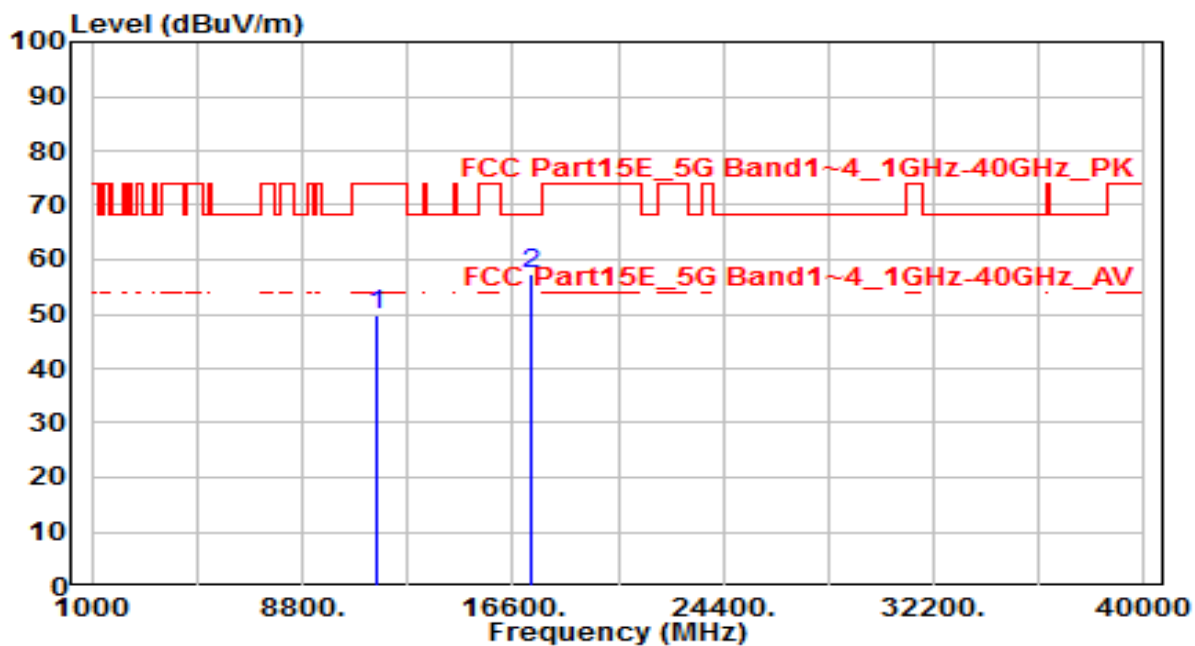


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	31.55	18.39	49.94	-24.06	74.00	150	0	Peak
2	* 17325.000	28.41	28.88	57.29	-10.91	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

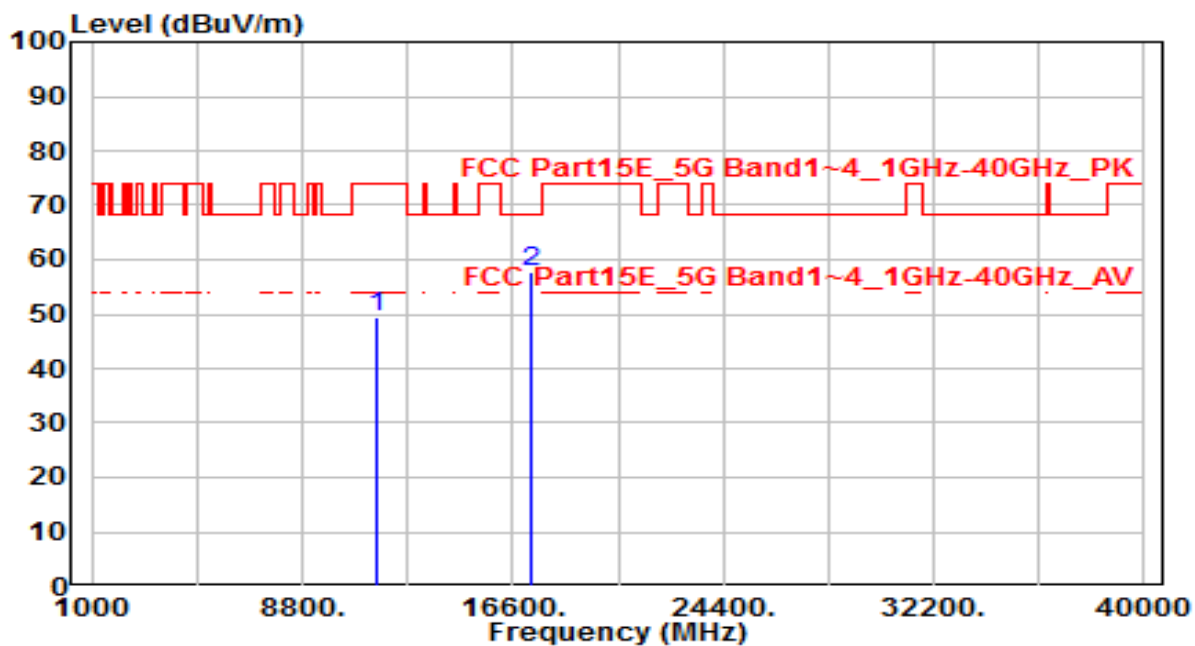

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	30.89	18.39	49.28	-24.72	74.00	150	0	Peak
2	* 17325.000	28.86	28.88	57.74	-10.46	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

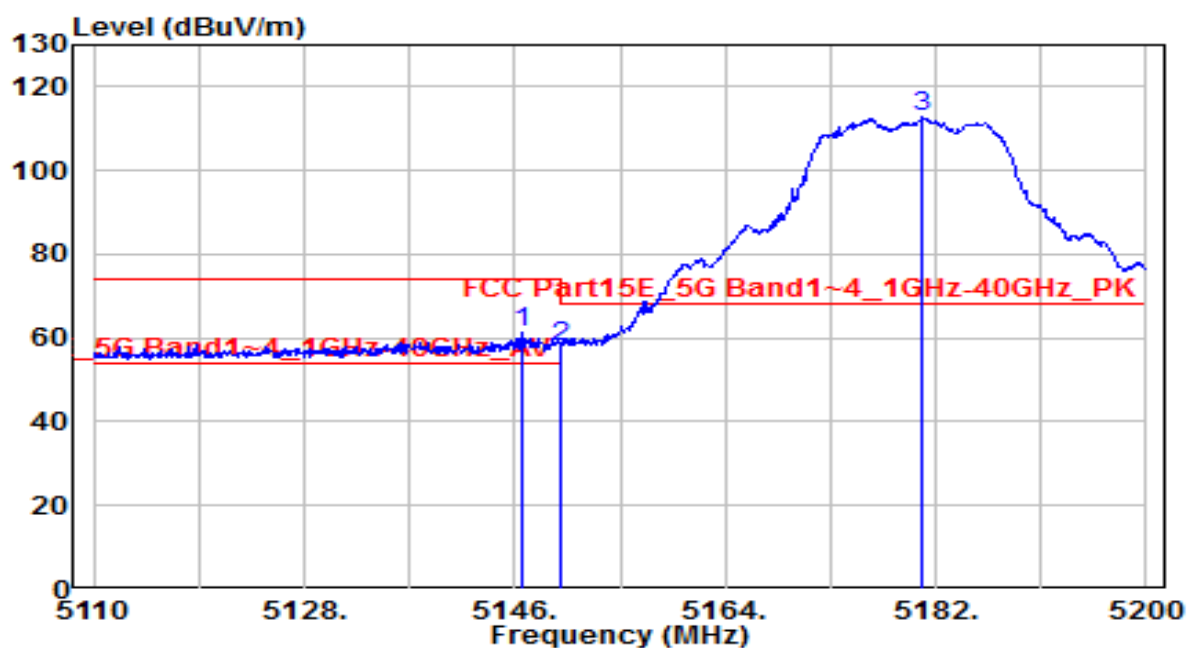


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.540	57.21	3.90	61.11	-12.89	74.00	150	205	Peak
2		5150.000	53.88	3.91	57.78	-16.22	74.00	150	205	Peak
3		5180.920	108.70	3.94	112.64	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

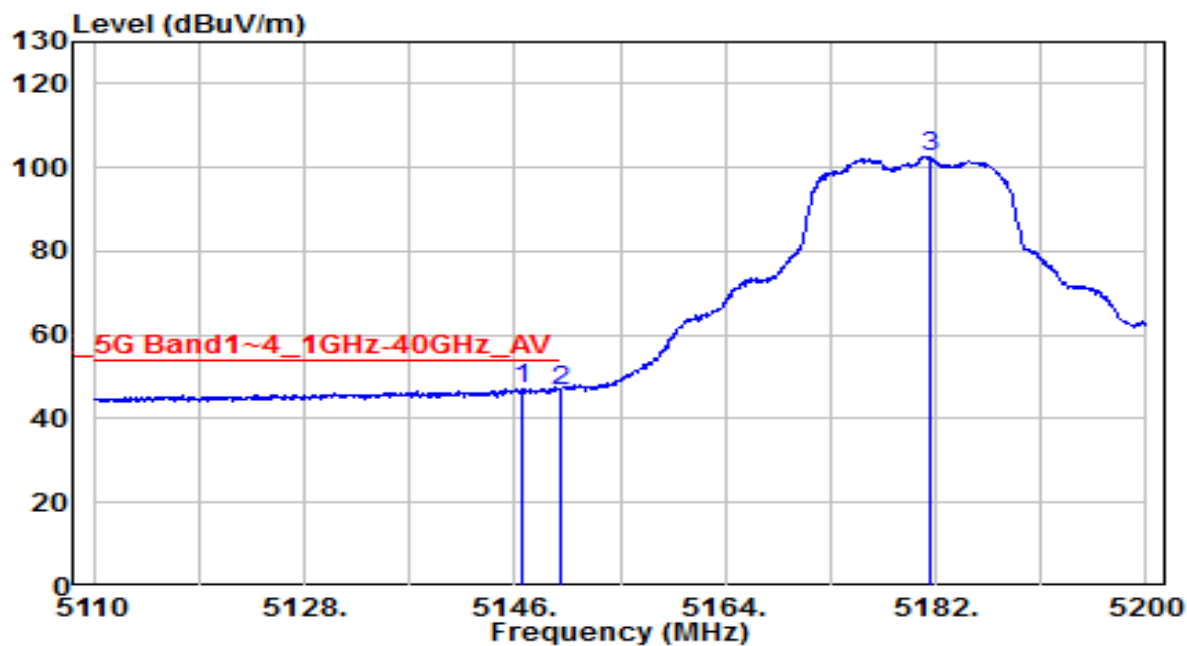


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.540	43.43	3.90	47.33	-6.67	54.00	150	205	Average
2		5150.000	42.76	3.91	46.67	-7.33	54.00	150	205	Average
3		5181.460	98.69	3.94	102.63	N/A	N/A	150	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

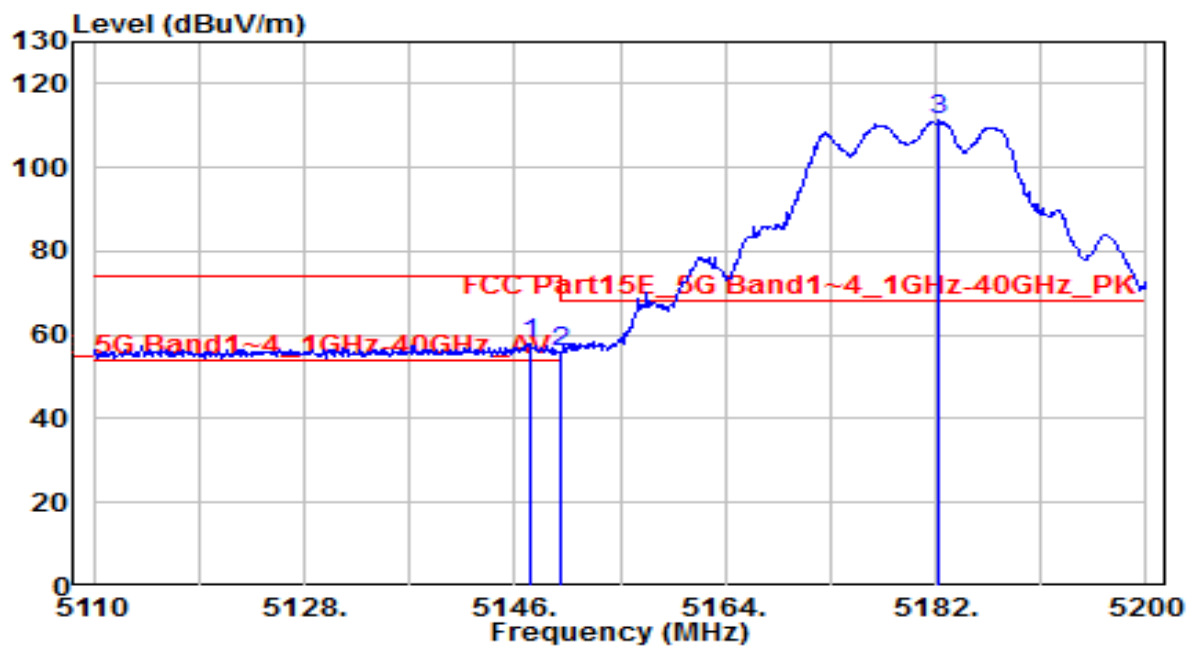


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.440	53.98	3.90	57.88	-16.12	74.00	150	80	Peak
2		5150.000	51.87	3.91	55.78	-18.22	74.00	150	80	Peak
3		5182.270	107.26	3.94	111.20	N/A	N/A	150	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

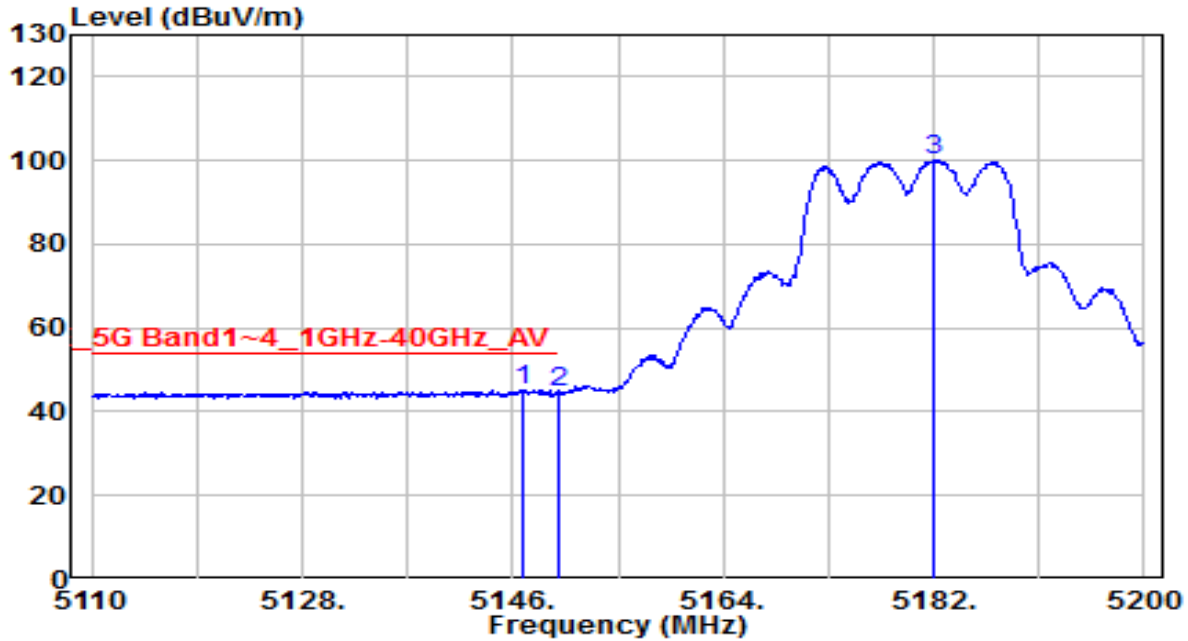


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	41.35	3.90	45.26	-8.74	54.00	150	80	Average
2		5150.000	40.52	3.91	44.43	-9.57	54.00	150	80	Average
3		5182.090	96.26	3.94	100.20	N/A	N/A	150	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

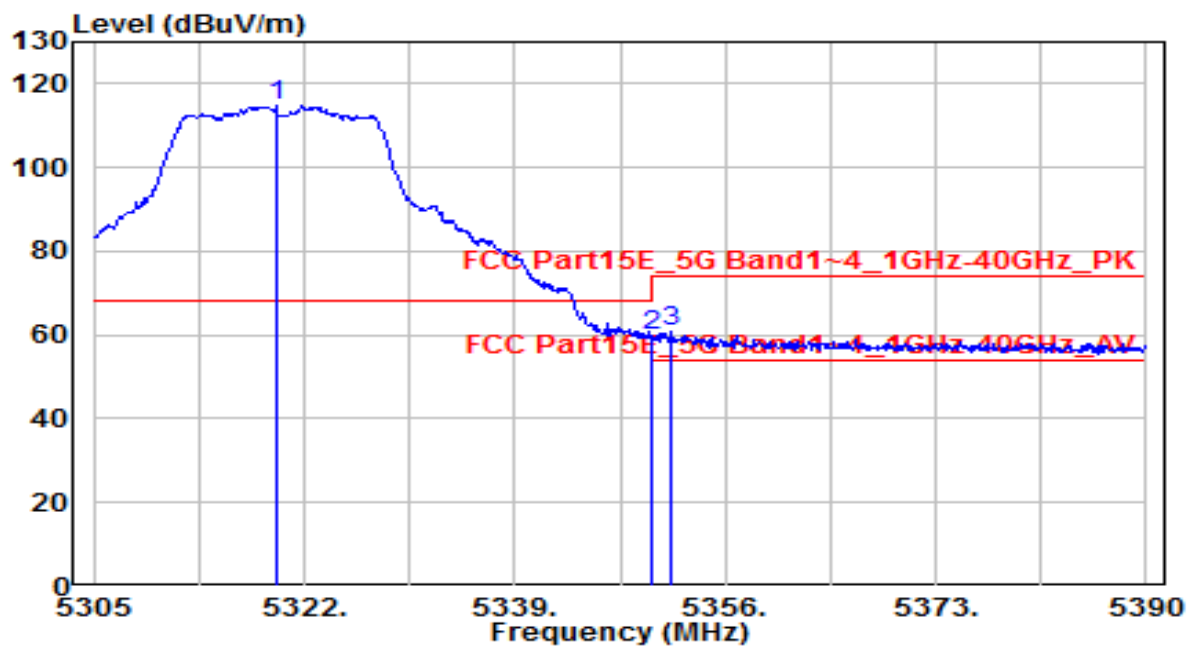


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5319.790	110.74	4.08	114.82	N/A	N/A	100	185	Peak
2		5350.000	55.83	4.11	59.94	-8.26	68.20	100	185	Peak
3		5351.665	56.57	4.12	60.68	-13.32	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

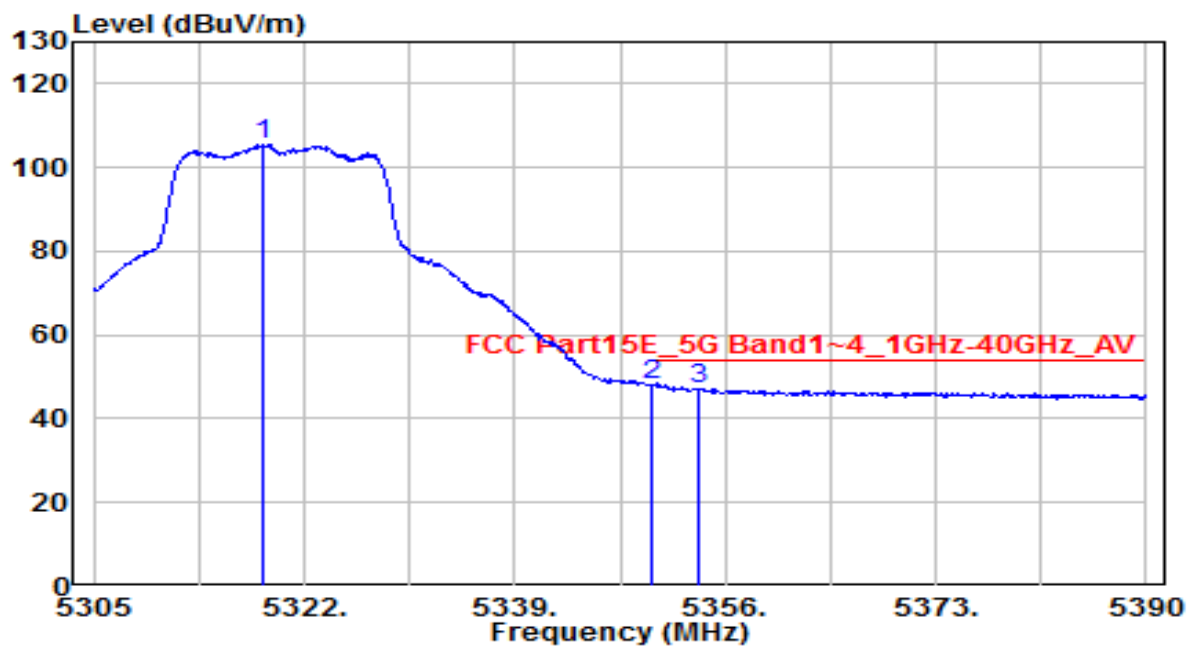


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	101.35	4.08	105.44	N/A	N/A	100	185	Average
2	* 5350.000	43.93	4.11	48.05	-5.95	54.00	100	185	Average
3	5353.875	43.13	4.12	47.25	-6.75	54.00	100	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

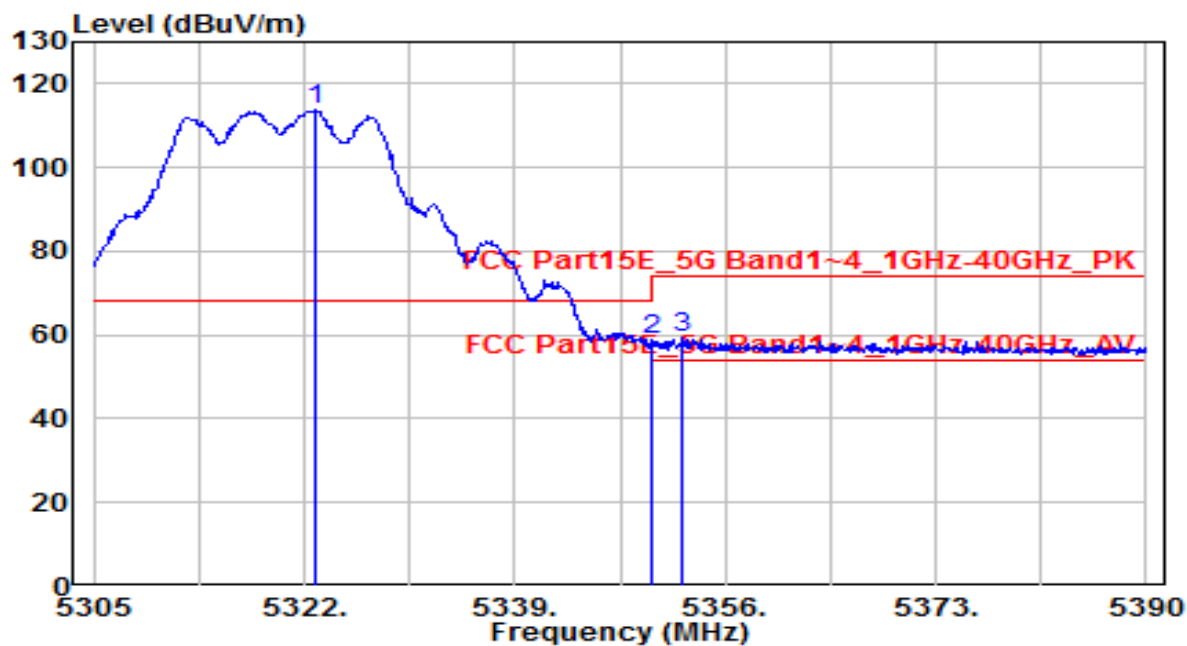


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.935	109.54	4.09	113.63	N/A	N/A	100	175	Peak
2	* 5350.000	54.73	4.11	58.84	-9.36	68.20	100	175	Peak
3	5352.600	55.35	4.12	59.47	-14.53	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

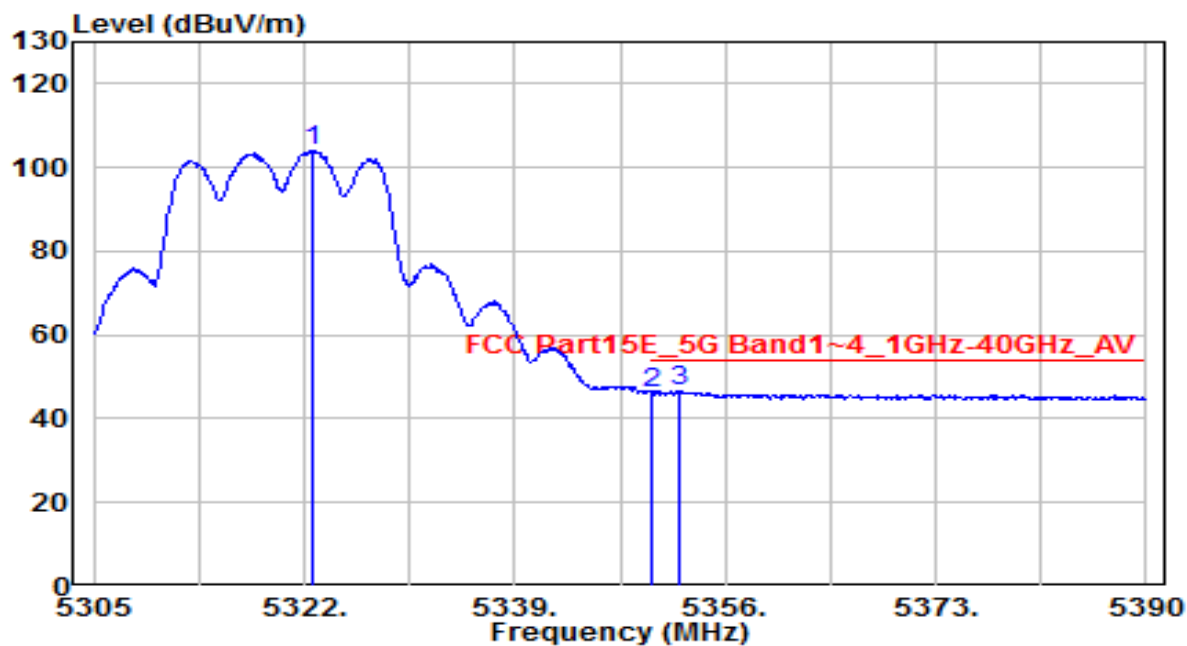


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.765	99.96	4.09	104.05	N/A	N/A	100	175	Average
2	5350.000	42.17	4.11	46.28	-7.72	54.00	100	175	Average
3	* 5352.345	42.67	4.12	46.79	-7.21	54.00	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

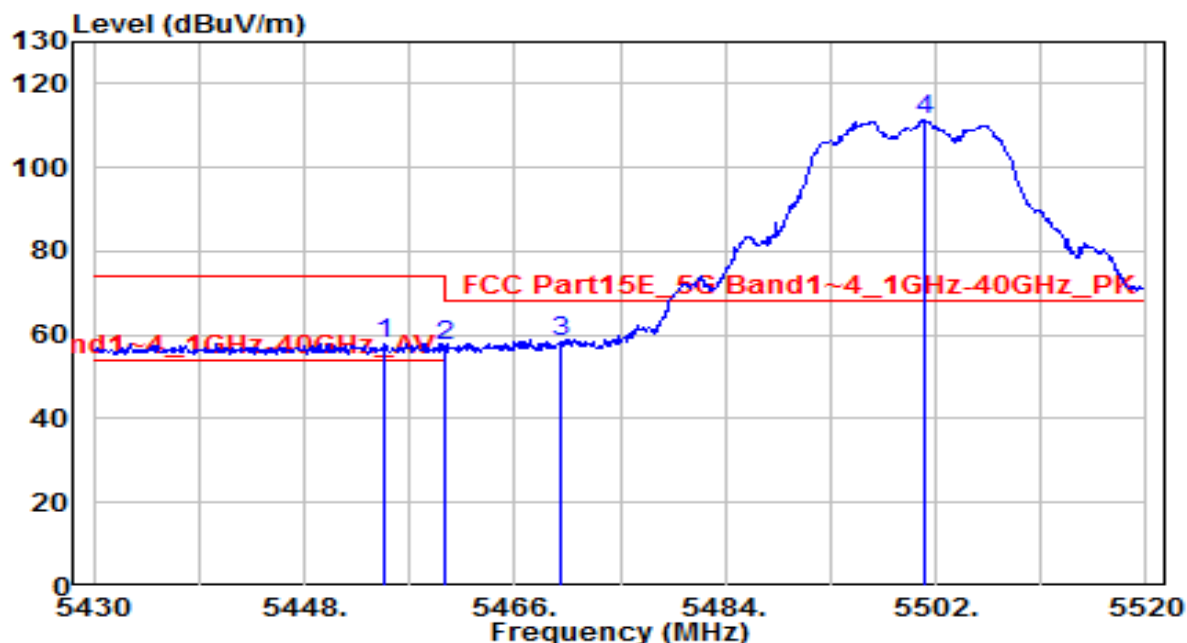


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.750	53.81	4.22	58.03	-15.97	74.00	100	175	Peak
2	5460.000	53.00	4.23	57.23	-10.97	68.20	100	175	Peak
3	* 5470.000	54.00	4.24	58.23	-9.97	68.20	100	175	Peak
4	5501.100	107.24	4.27	111.51	N/A	N/A	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

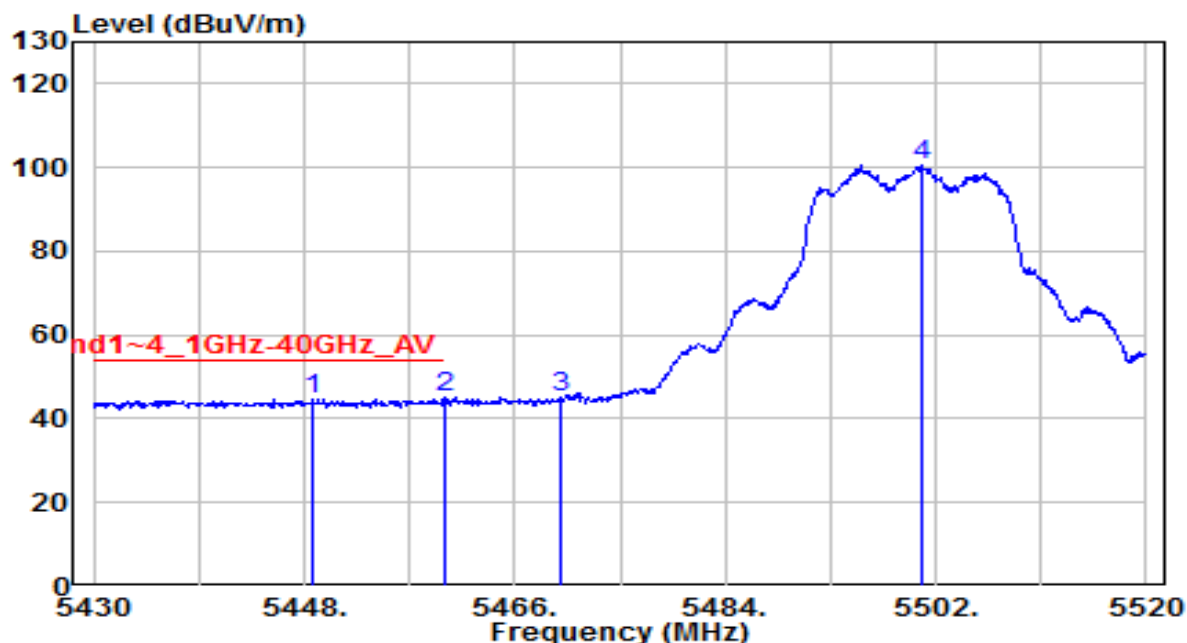


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.810	40.62	4.22	44.84	-9.16	54.00	100	175	Average
2	* 5460.000	40.66	4.23	44.89	-9.11	54.00	100	175	Average
3	5470.000	40.78	4.24	45.02	N/A	N/A	100	175	Average
4	5500.830	96.30	4.27	100.58	N/A	N/A	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

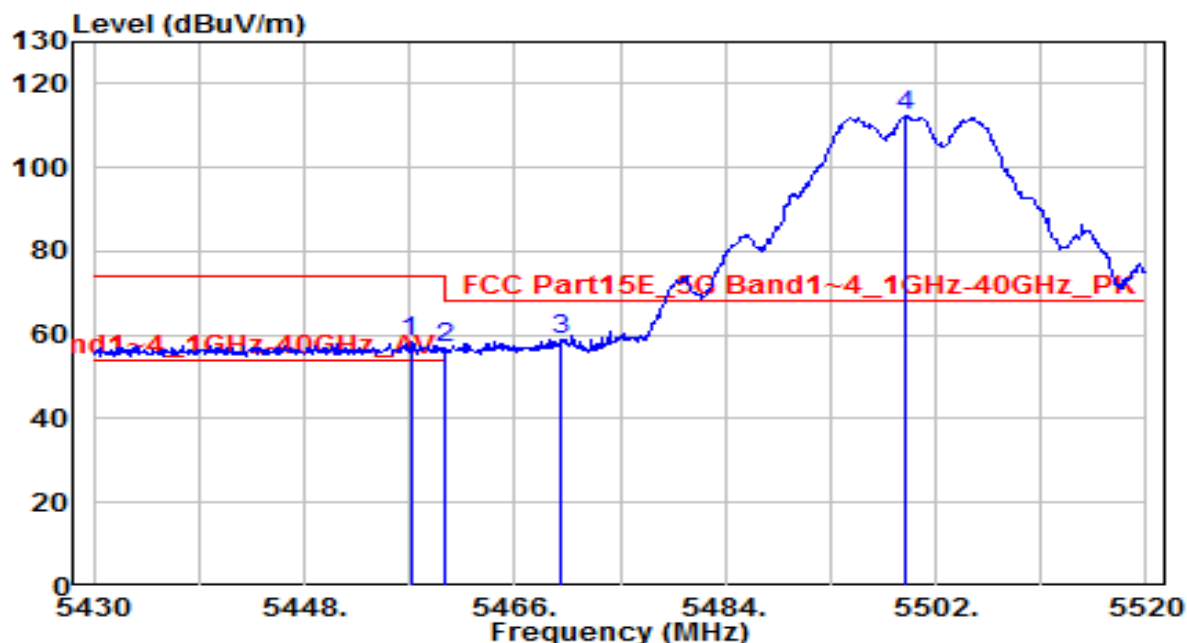


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.090	54.06	4.23	58.29	-15.71	74.00	100	180	Peak
2	5460.000	52.48	4.23	56.71	-11.49	68.20	100	180	Peak
3	* 5470.000	54.85	4.24	59.09	-9.11	68.20	100	180	Peak
4	5499.480	107.91	4.27	112.18	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

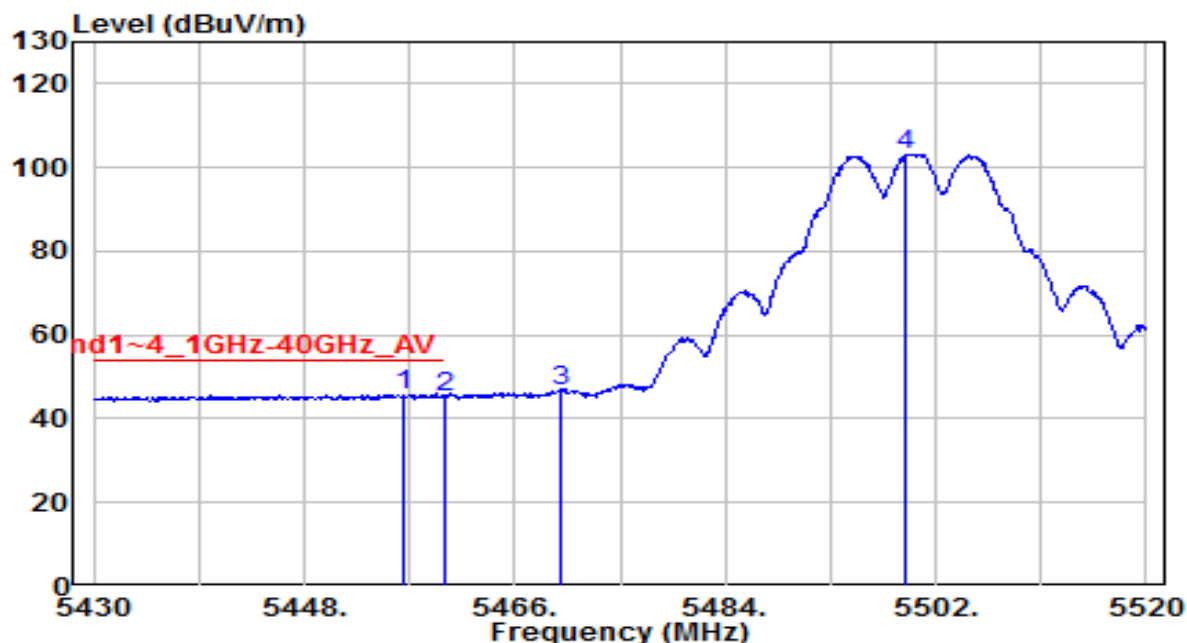


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.550	41.41	4.22	45.64	-8.36	54.00	100	180	Average
2		5460.000	41.03	4.23	45.26	-8.74	54.00	100	180	Average
3		5470.000	42.48	4.24	46.72	N/A	N/A	100	180	Average
4		5499.300	98.99	4.27	103.26	N/A	N/A	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

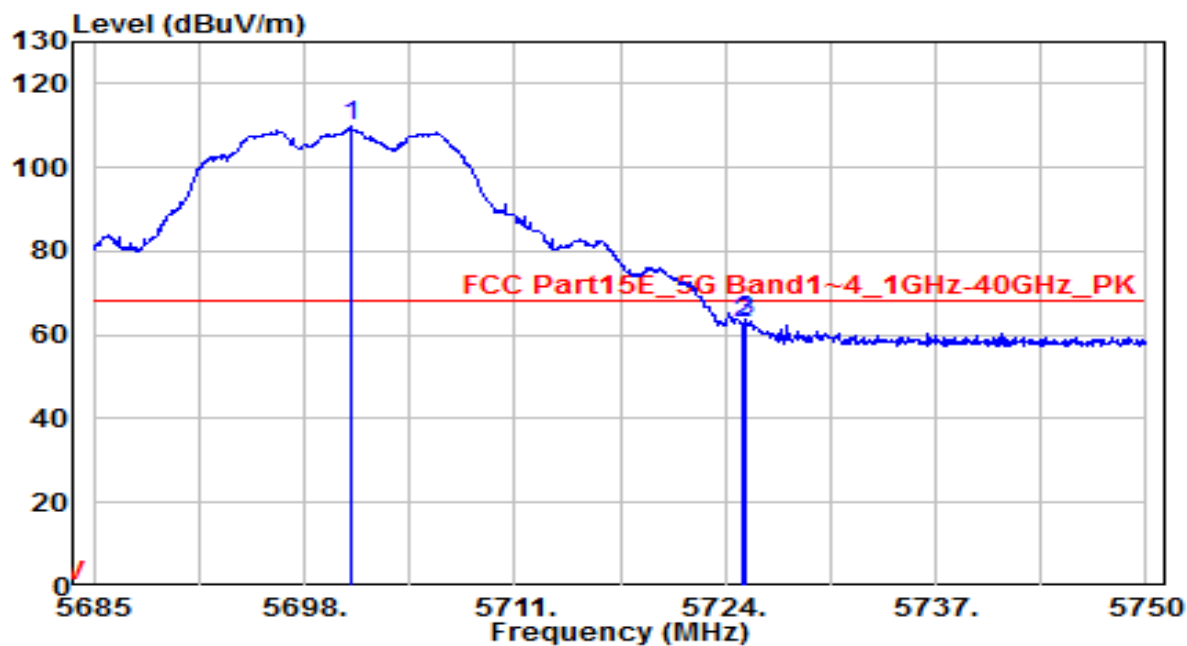


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.860	104.92	4.92	109.84	N/A	N/A	150	250	Peak
2	5725.000	57.66	5.00	62.66	-5.54	68.20	150	250	Peak
3	* 5725.235	58.47	5.00	63.47	-4.73	68.20	150	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

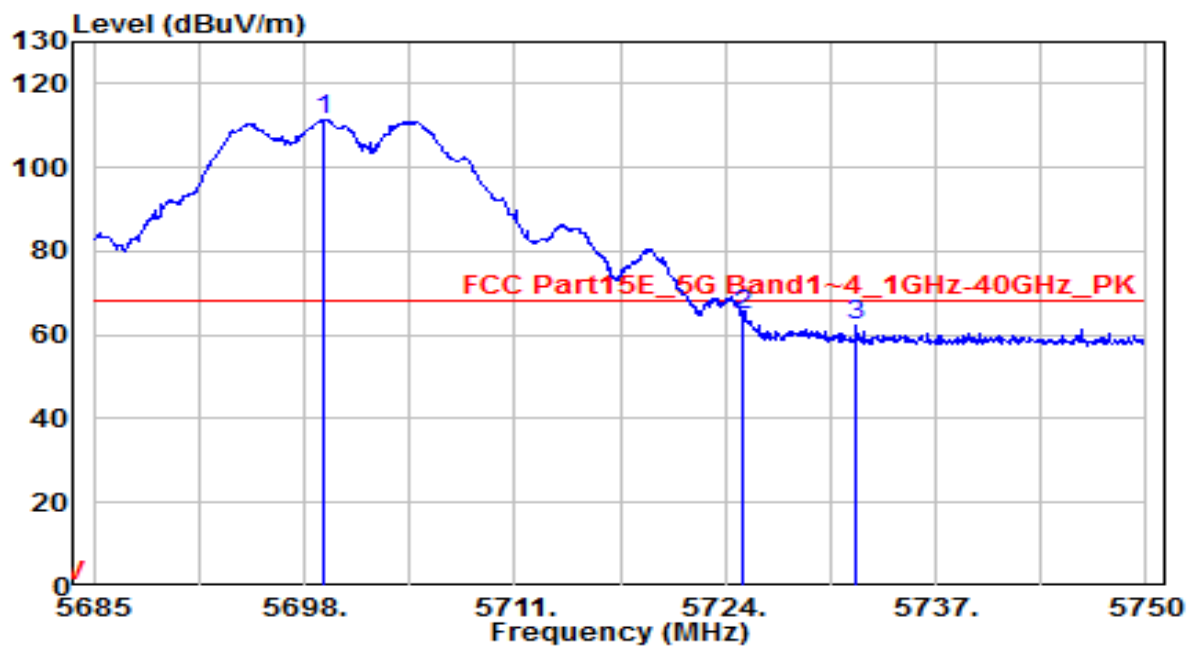


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.170	106.61	4.92	111.53	N/A	N/A	100	180	Peak
2	* 5725.000	59.87	5.00	64.87	-3.33	68.20	100	180	Peak
3	5732.125	57.09	5.02	62.12	-6.08	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

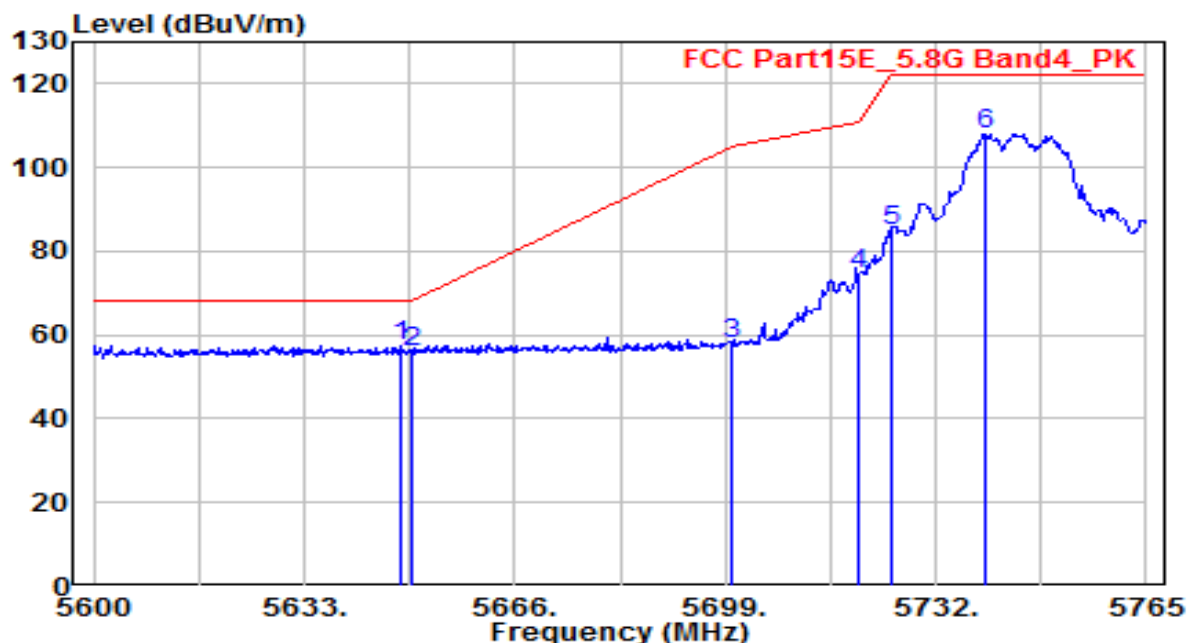


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.345	52.64	4.75	57.39	-10.81	68.20	150	240	Peak
2		5650.000	51.31	4.76	56.06	-12.14	68.20	150	240	Peak
3		5700.000	52.96	4.92	57.87	-47.33	105.20	150	240	Peak
4		5720.000	69.72	4.98	74.71	-36.09	110.80	150	240	Peak
5		5725.000	80.02	5.00	85.02	-37.18	122.20	150	240	Peak
6		5739.755	103.09	5.05	108.14	-14.06	122.20	150	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

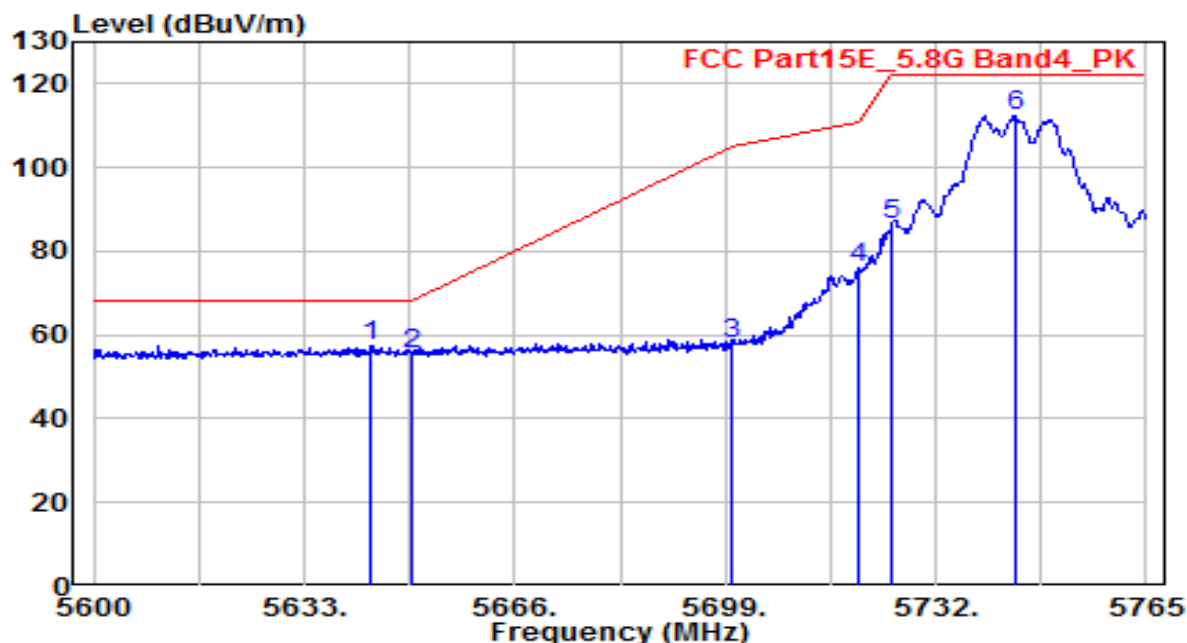


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5643.395	52.51	4.73	57.25	-10.95	68.20	150	185	Peak
2	5650.000	50.81	4.76	55.57	-12.63	68.20	150	185	Peak
3	5700.000	52.99	4.92	57.91	-47.29	105.20	150	185	Peak
4	5720.000	71.00	4.98	75.98	-34.82	110.80	150	185	Peak
5	5725.000	81.19	5.00	86.18	-36.02	122.20	150	185	Peak
6	* 5744.375	107.11	5.06	112.17	-10.03	122.20	150	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

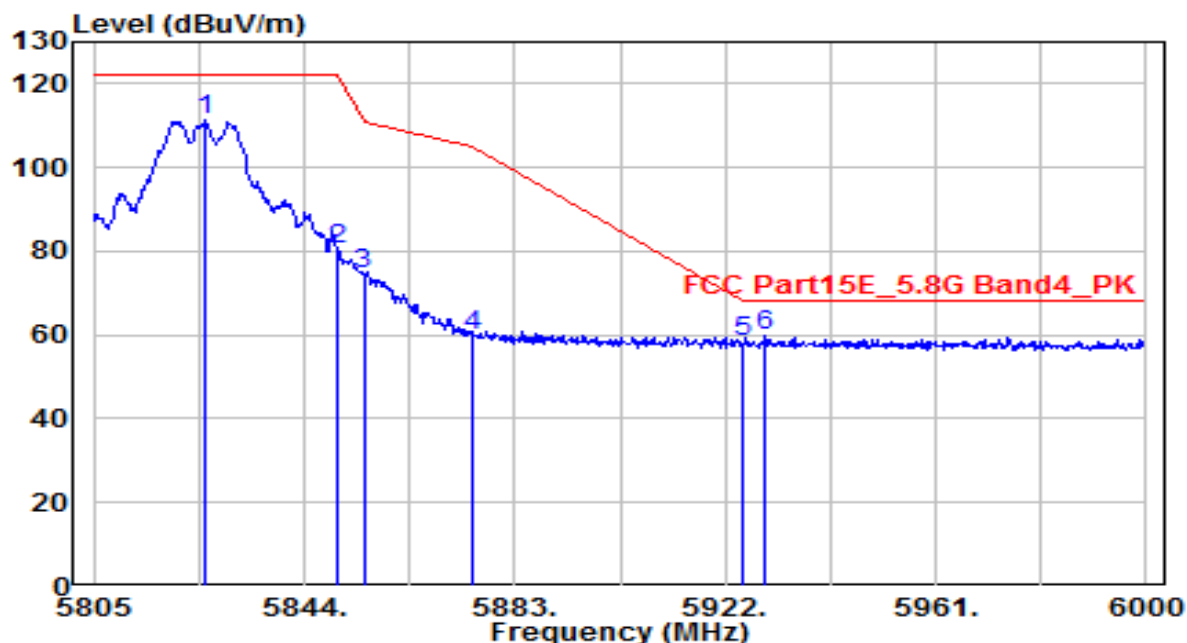


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.670	106.24	5.33	111.56	-10.64	122.20	150	0	Peak
2	5850.000	75.06	5.40	80.47	-41.73	122.20	150	0	Peak
3	5855.000	69.03	5.42	74.45	-36.35	110.80	150	0	Peak
4	5875.000	54.35	5.49	59.83	-45.37	105.20	150	0	Peak
5	5925.000	52.82	5.65	58.47	-9.73	68.20	150	0	Peak
6	* 5929.410	54.11	5.66	59.77	-8.43	68.20	150	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-05
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

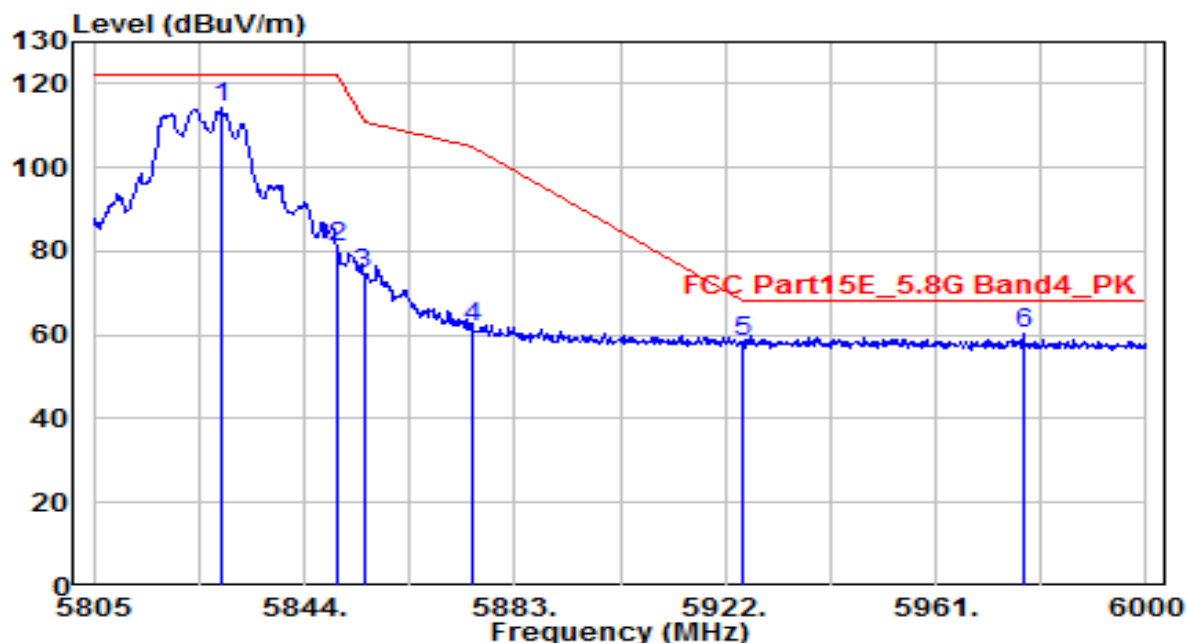


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.595	109.02	5.33	114.36	-7.84	122.20	100	335	Peak
2	5850.000	75.63	5.40	81.04	-41.16	122.20	100	335	Peak
3	5855.000	69.01	5.42	74.43	-36.37	110.80	100	335	Peak
4	5875.000	56.32	5.49	61.80	-43.40	105.20	100	335	Peak
5	5925.000	52.68	5.65	58.32	-9.88	68.20	100	335	Peak
6	* 5977.185	54.67	5.82	60.49	-7.71	68.20	100	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

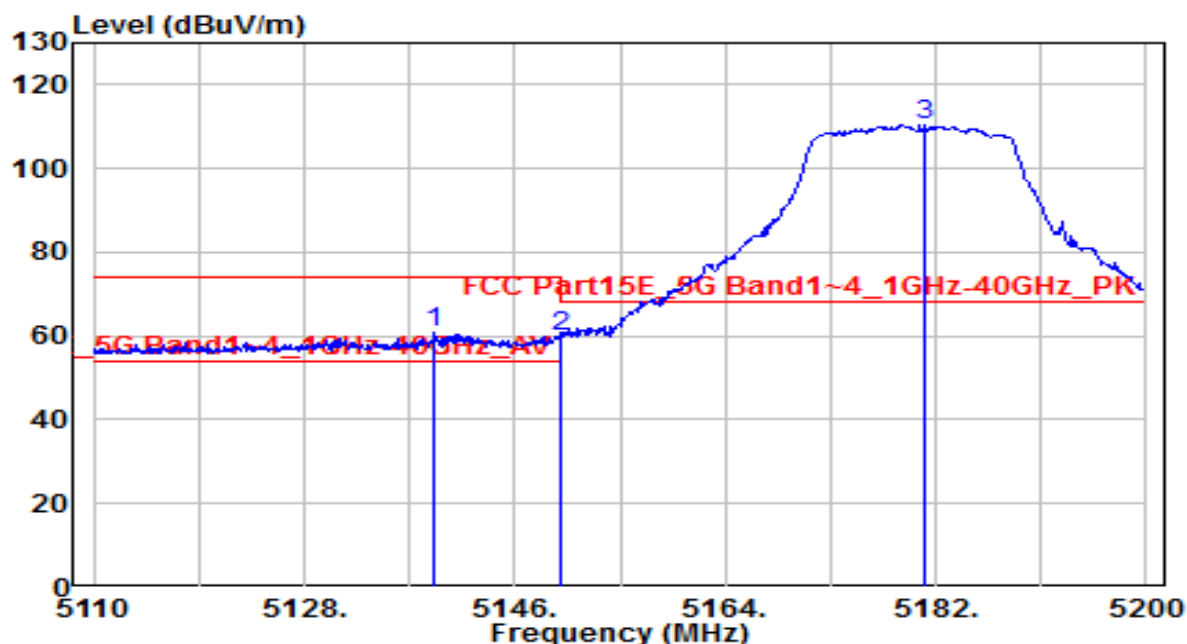


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.070	57.07	3.89	60.96	-13.04	74.00	150	205	Peak
2		5150.000	56.15	3.91	60.05	-13.95	74.00	150	205	Peak
3		5181.100	106.38	3.94	110.32	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

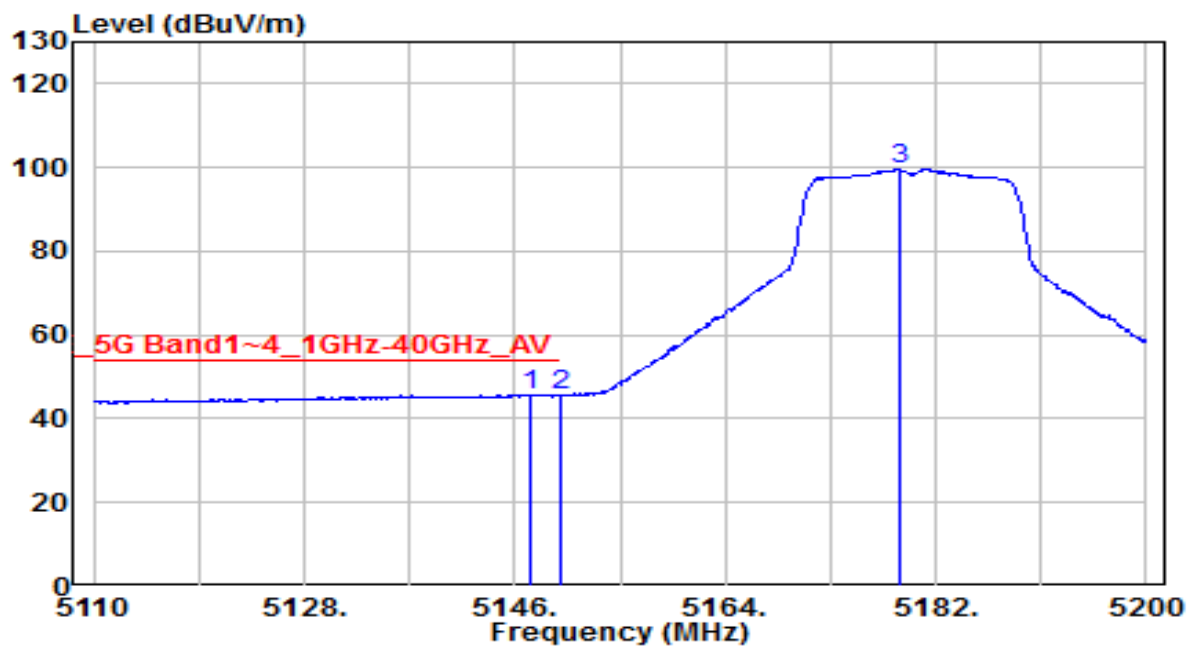


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.260	41.77	3.90	45.68	-8.32	54.00	150	205	Average
2		5150.000	41.59	3.91	45.49	-8.51	54.00	150	205	Average
3		5178.850	95.69	3.94	99.62	N/A	N/A	150	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

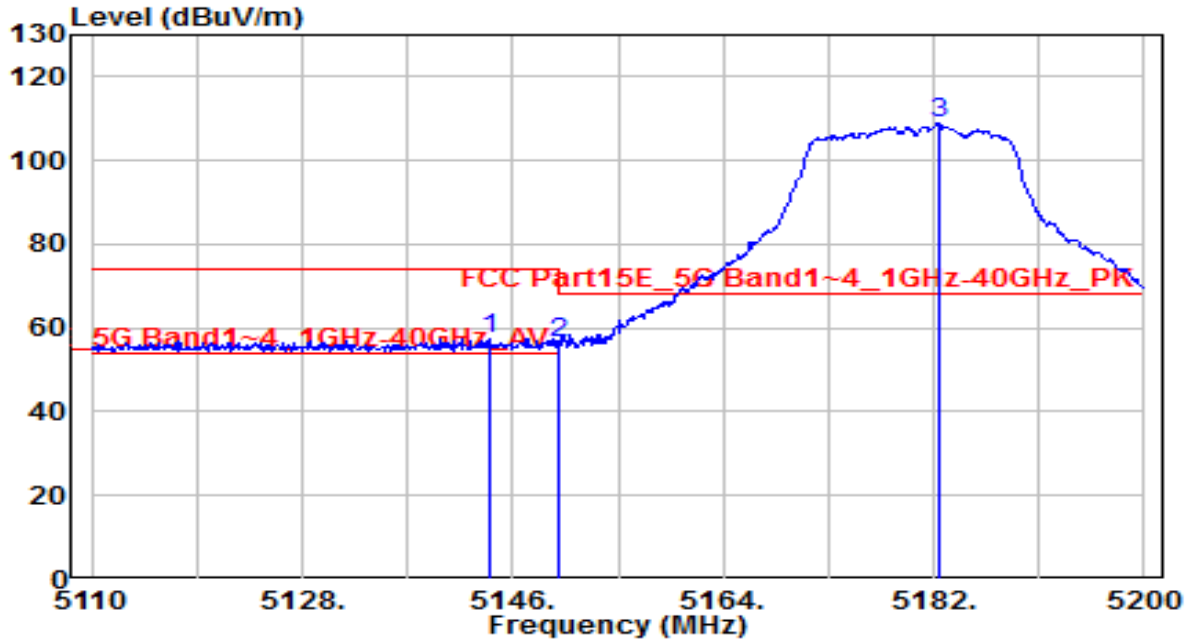


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.930	53.74	3.90	57.64	-16.36	74.00	150	80	Peak
2		5150.000	52.47	3.91	56.38	-17.62	74.00	150	80	Peak
3		5182.360	104.92	3.94	108.86	N/A	N/A	150	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

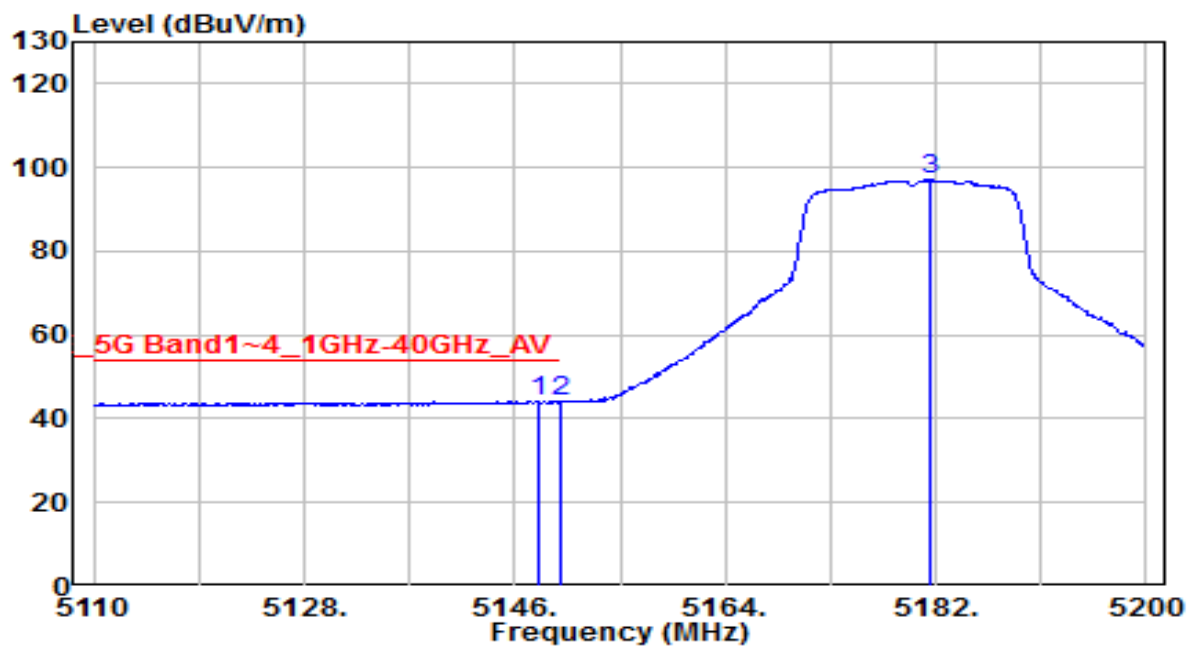


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.070	40.20	3.90	44.10	-9.90	54.00	150	80	Average
2	* 5150.000	40.23	3.91	44.13	-9.87	54.00	150	80	Average
3	5181.550	93.04	3.94	96.98	N/A	N/A	150	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

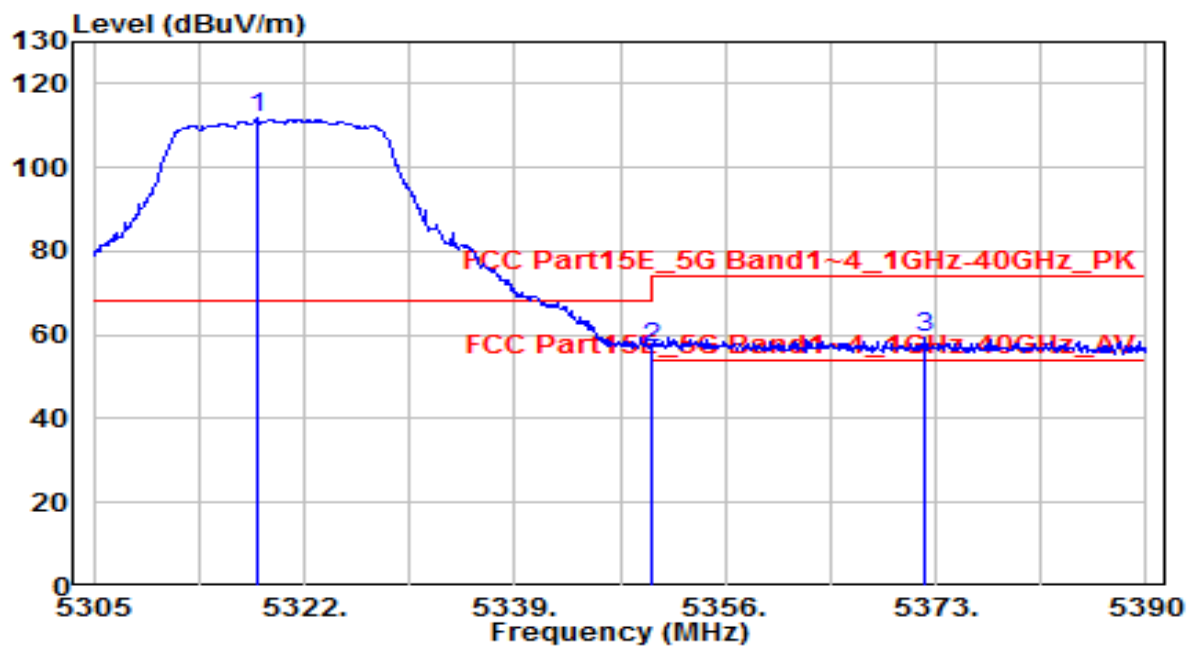


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.175	107.71	4.08	111.79	N/A	N/A	100	185	Peak
2	* 5350.000	52.62	4.11	56.73	-11.47	68.20	100	185	Peak
3	5372.065	55.40	4.14	59.54	-14.46	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

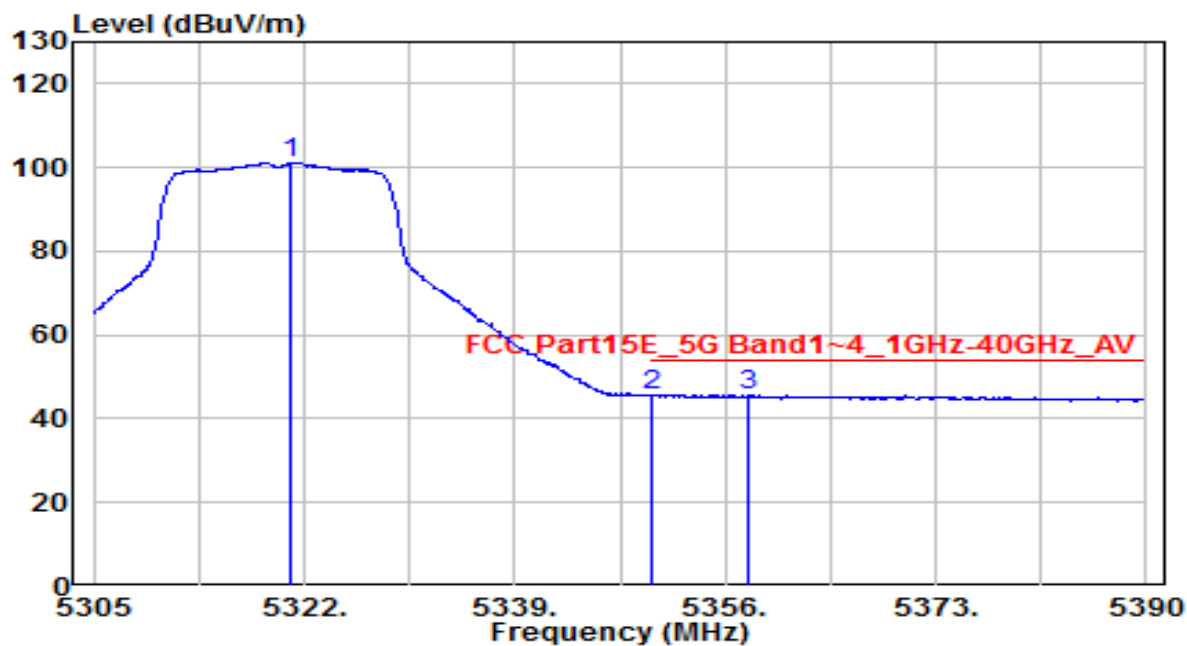


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.980	97.08	4.08	101.16	N/A	N/A	100	185	Average
2	* 5350.000	41.55	4.11	45.67	-8.33	54.00	100	185	Average
3	5357.955	41.54	4.12	45.66	-8.34	54.00	100	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

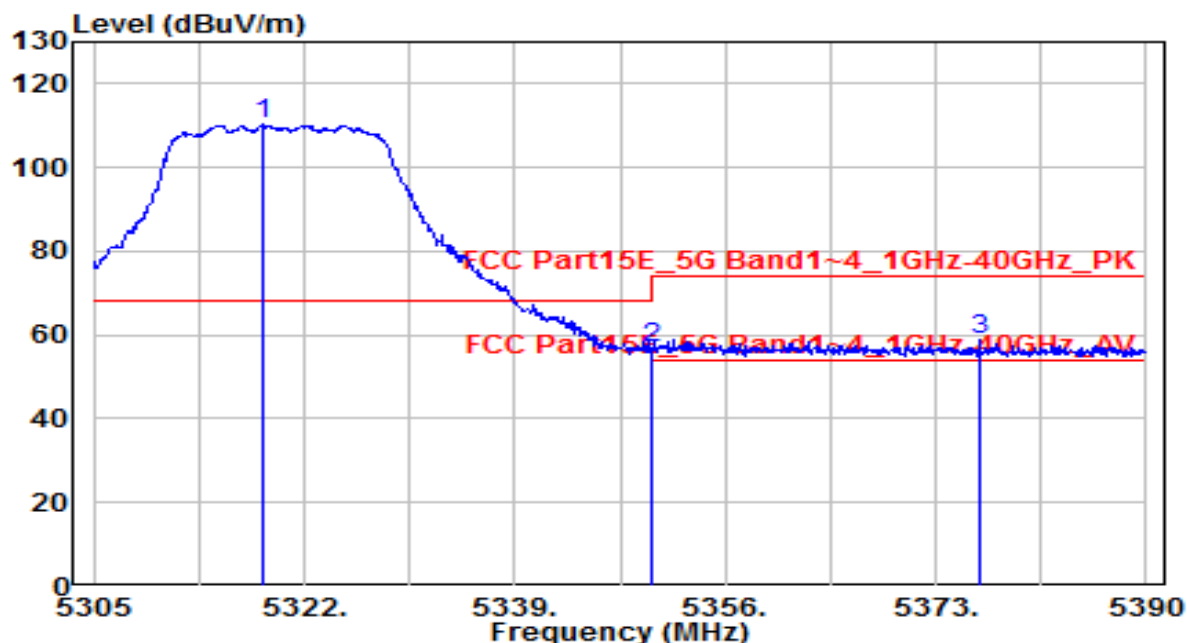


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	106.33	4.08	110.41	N/A	N/A	100	175	Peak
2	* 5350.000	52.91	4.11	57.03	-11.17	68.20	100	175	Peak
3	5376.570	54.86	4.14	59.00	-15.00	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

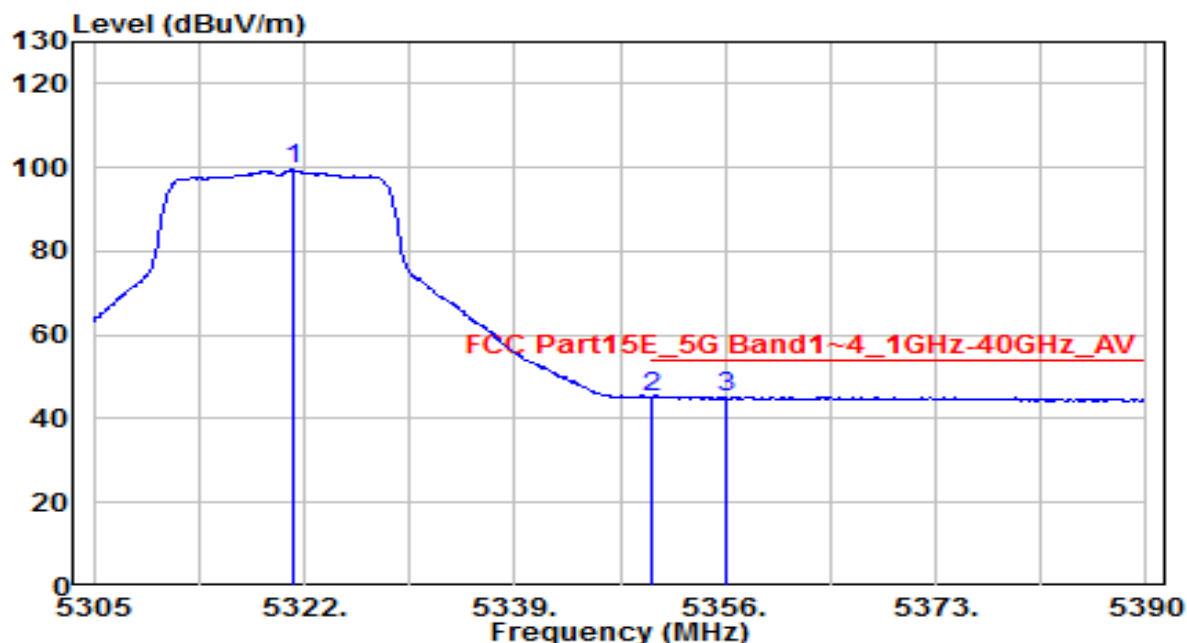


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.065	95.30	4.08	99.38	N/A	N/A	100	175	Average
2	5350.000	40.91	4.11	45.02	-8.98	54.00	100	175	Average
3	* 5356.085	41.06	4.12	45.18	-8.82	54.00	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

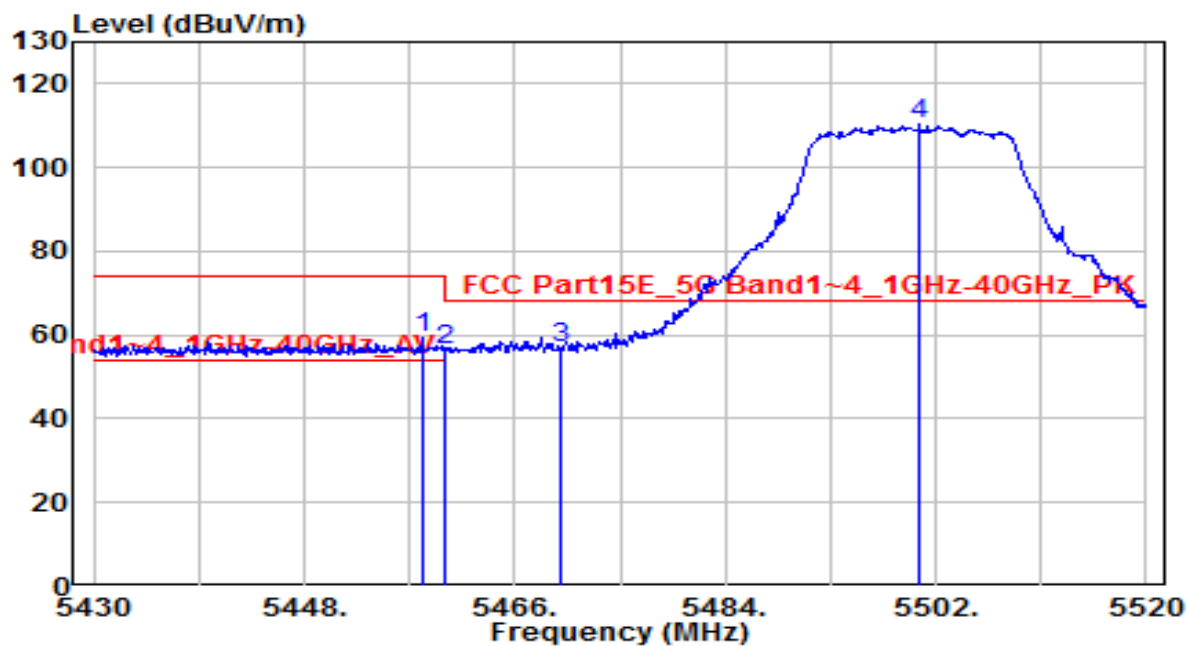


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.080	55.13	4.23	59.36	-14.64	74.00	100	175	Peak
2	5460.000	52.28	4.23	56.51	-11.69	68.20	100	175	Peak
3	* 5470.000	52.72	4.24	56.96	-11.24	68.20	100	175	Peak
4	5500.560	106.25	4.27	110.52	N/A	N/A	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

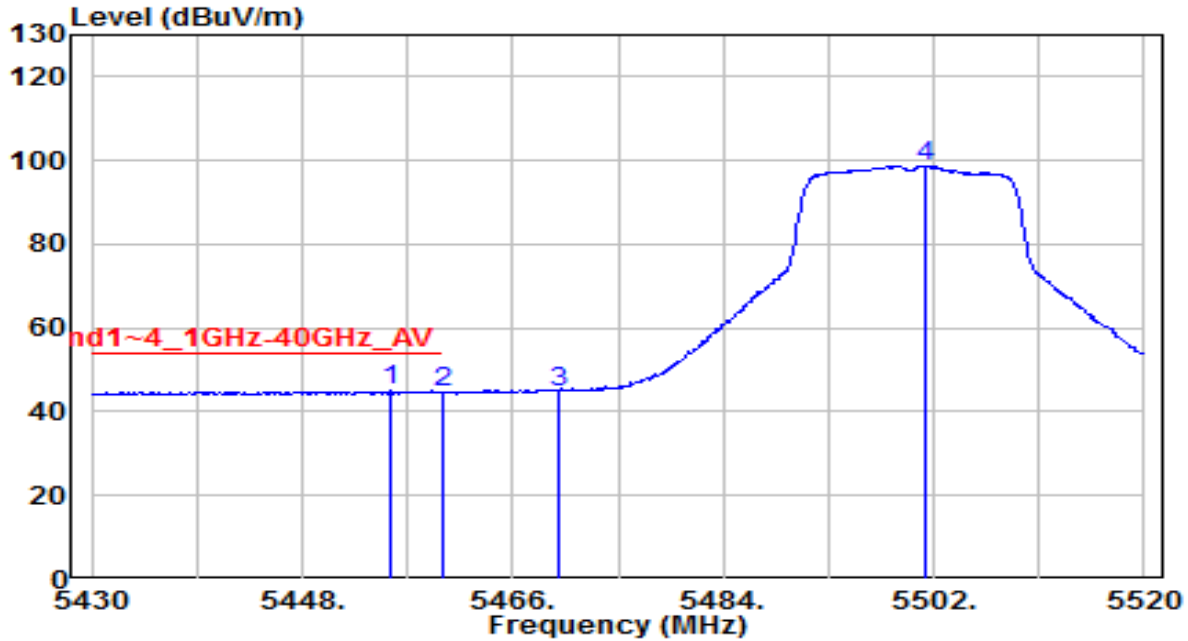


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.650	40.79	4.22	45.02	-8.98	54.00	100	175	Average
2		5460.000	40.38	4.23	44.61	-9.39	54.00	100	175	Average
3		5470.000	40.53	4.24	44.77	N/A	N/A	100	175	Average
4		5501.370	94.49	4.27	98.77	N/A	N/A	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

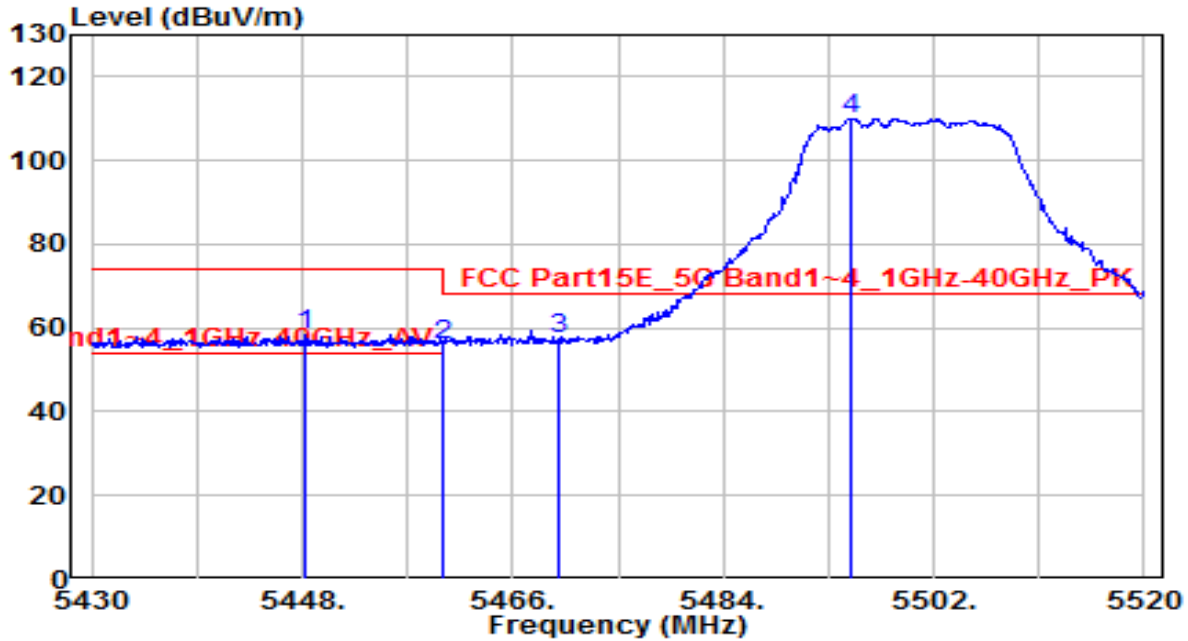


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.180	54.15	4.22	58.37	-15.63	74.00	100	180	Peak
2	5460.000	51.71	4.23	55.94	-12.26	68.20	100	180	Peak
3	* 5470.000	53.36	4.24	57.60	-10.60	68.20	100	180	Peak
4	5494.980	105.83	4.26	110.09	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

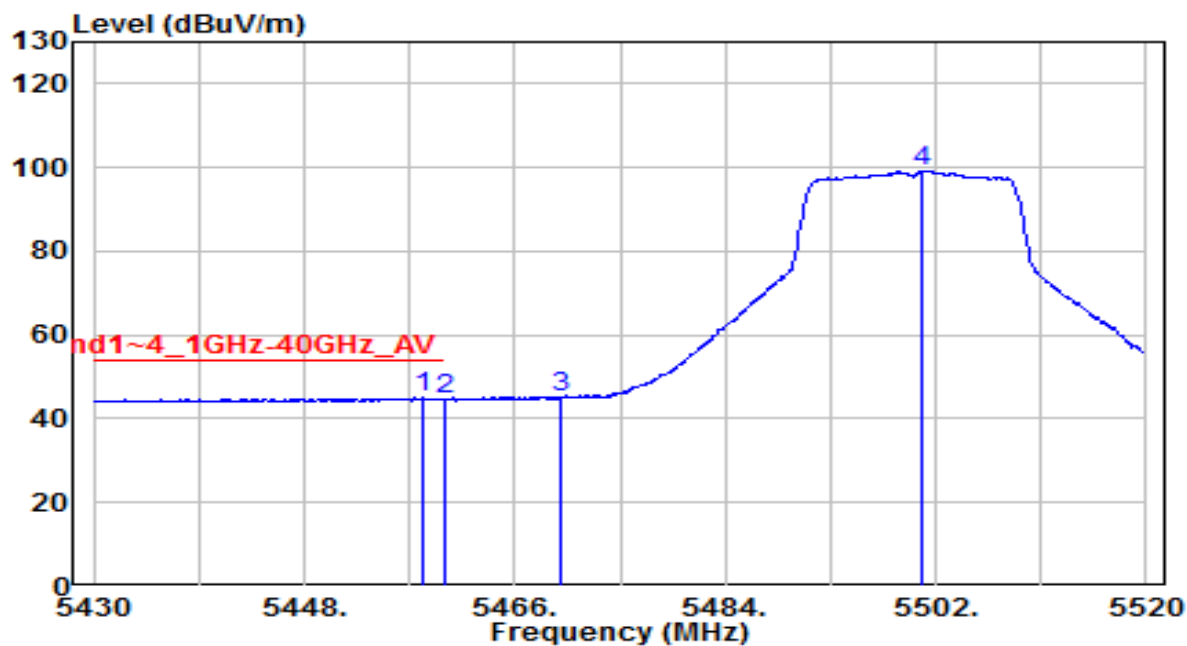


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.080	40.75	4.23	44.97	-9.03	54.00	100	180	Average
2		5460.000	40.33	4.23	44.56	-9.44	54.00	100	180	Average
3		5470.000	40.68	4.24	44.92	N/A	N/A	100	180	Average
4		5500.830	94.93	4.27	99.20	N/A	N/A	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

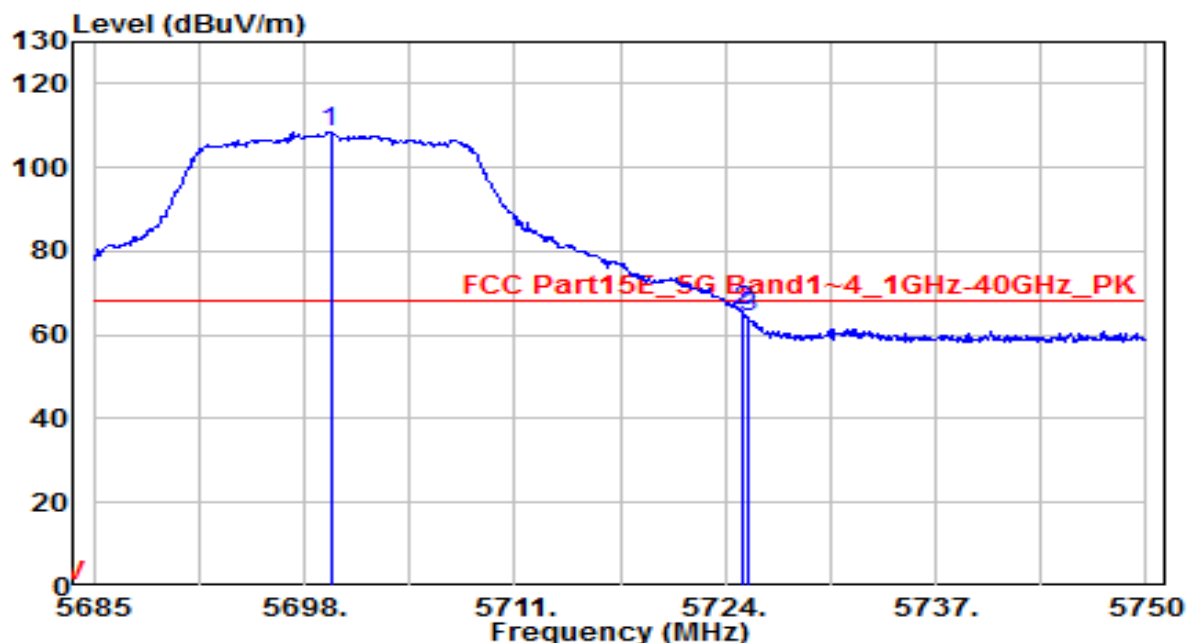


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.625	103.45	4.92	108.37	N/A	N/A	150	250	Peak
2	* 5725.000	60.69	5.00	65.69	-2.51	68.20	150	50	Peak
3	5725.365	59.39	5.00	64.39	-3.81	68.20	150	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

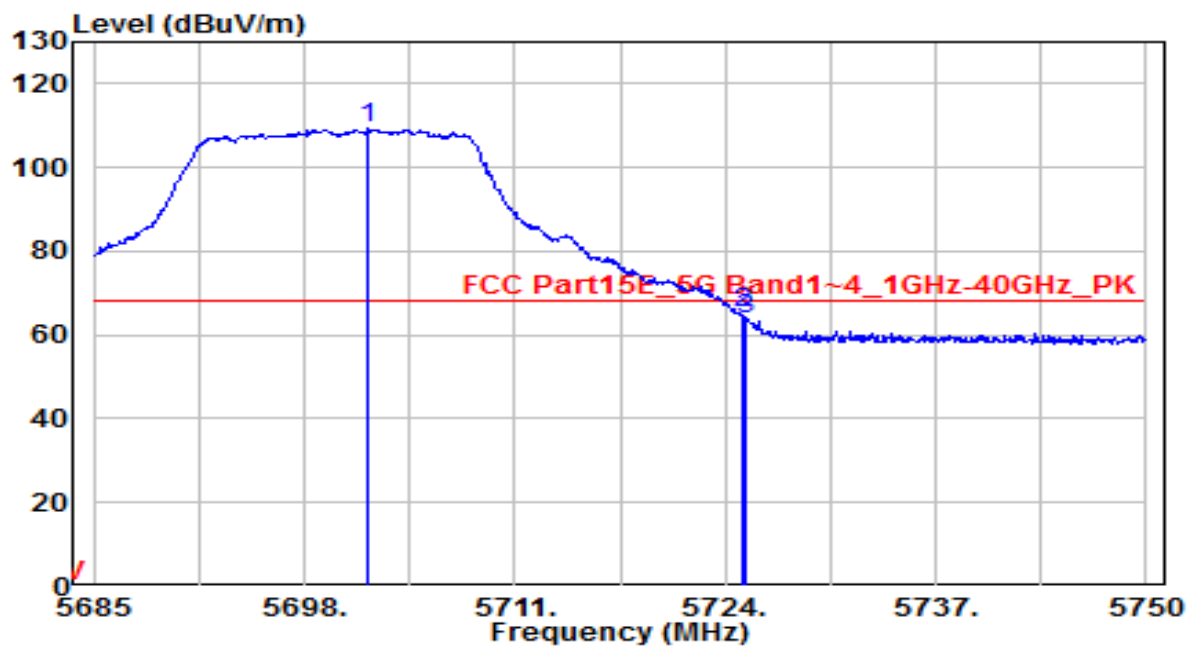


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.965	104.43	4.92	109.35	N/A	N/A	100	180	Peak
2	* 5725.000	60.08	5.00	65.08	-3.12	68.20	100	180	Peak
3	5725.235	58.98	5.00	63.98	-4.22	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

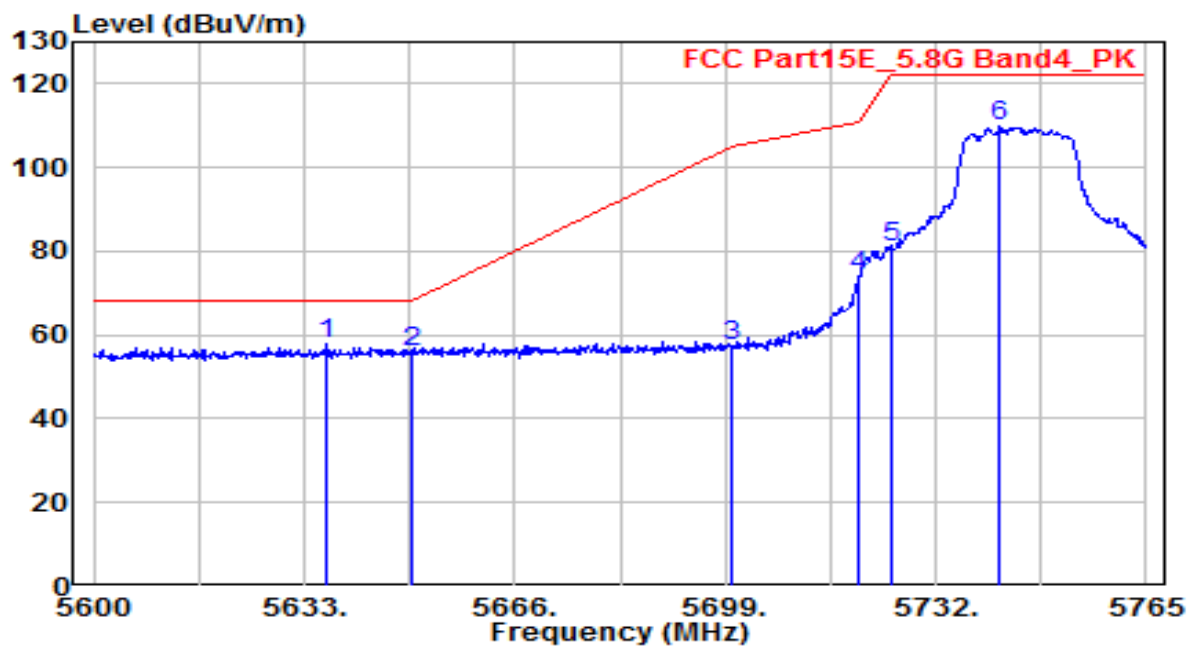


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.630	53.39	4.71	58.10	-10.10	68.20	150	240	Peak
2		5650.000	51.20	4.76	55.96	-12.24	68.20	150	240	Peak
3		5700.000	52.44	4.92	57.35	-47.85	105.20	150	240	Peak
4		5720.000	68.91	4.98	73.90	-36.90	110.80	150	240	Peak
5		5725.000	76.15	5.00	81.15	-41.05	122.20	150	240	Peak
6		5742.065	104.64	5.05	109.69	-12.51	122.20	150	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

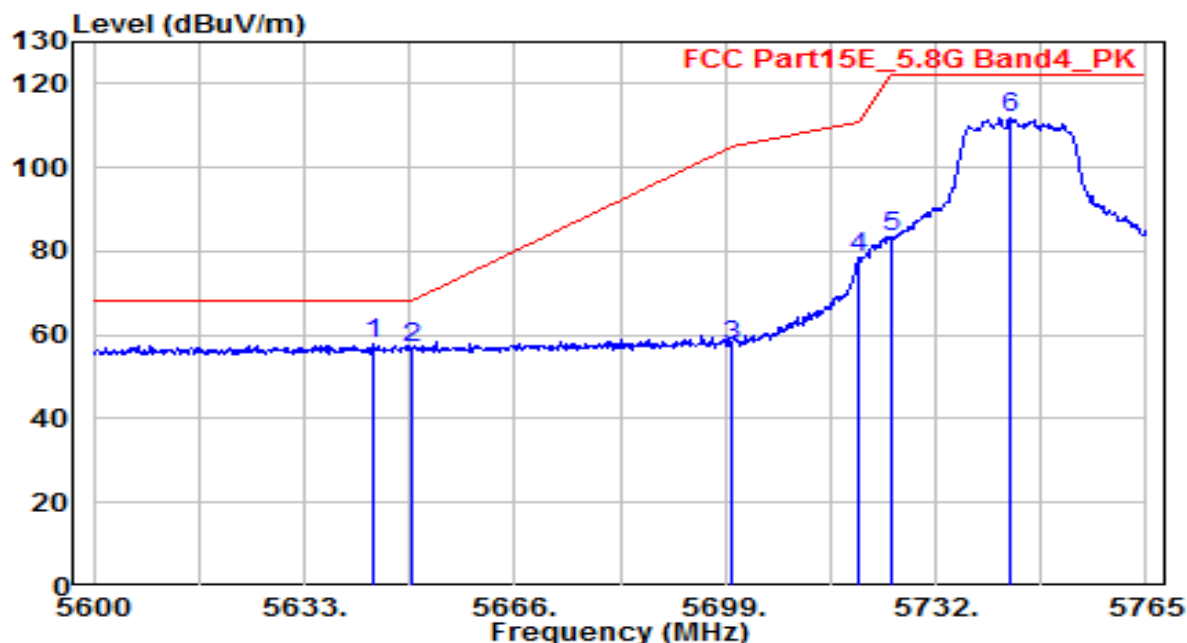


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5643.725	53.19	4.74	57.93	-10.27	68.20	150	185	Peak
2	5650.000	52.02	4.76	56.77	-11.43	68.20	150	185	Peak
3	5700.000	52.66	4.92	57.58	-47.62	105.20	150	185	Peak
4	5720.000	73.31	4.98	78.29	-32.51	110.80	150	185	Peak
5	5725.000	78.24	5.00	83.24	-38.96	122.20	150	185	Peak
6	* 5743.715	107.02	5.06	112.08	-10.12	122.20	150	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

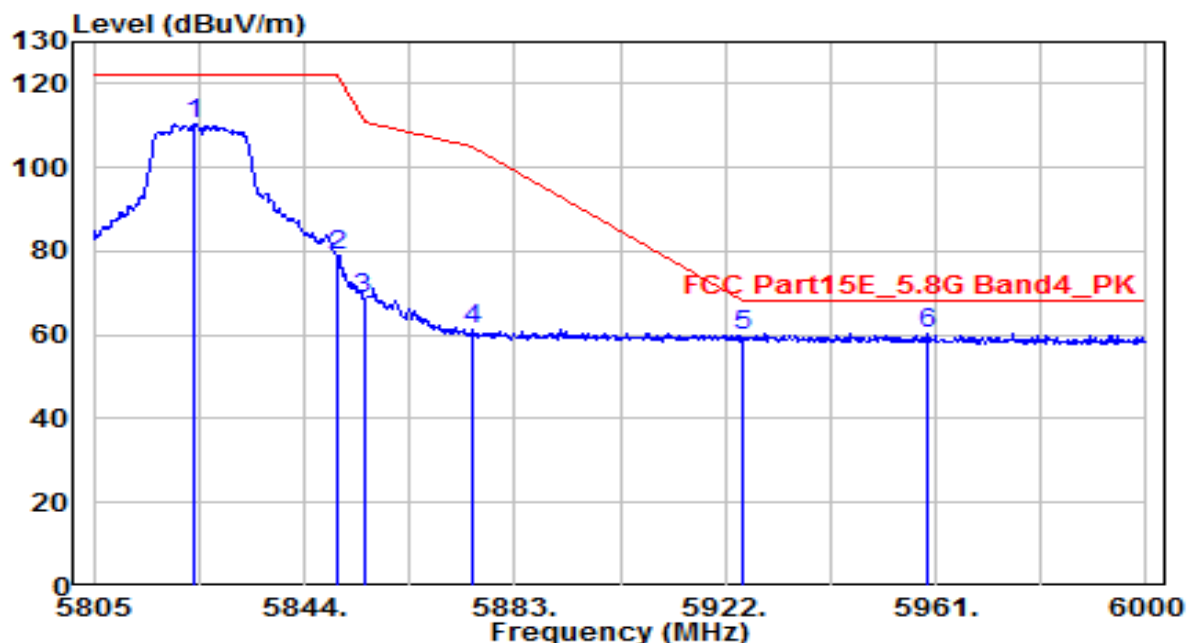


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.720	105.21	5.32	110.53	-11.67	122.20	150	0	Peak
2	5850.000	73.69	5.40	79.10	-43.10	122.20	150	0	Peak
3	5855.000	63.48	5.42	68.90	-41.90	110.80	150	0	Peak
4	5875.000	55.70	5.49	61.18	-44.02	105.20	150	0	Peak
5	5925.000	54.38	5.65	60.03	-8.17	68.20	150	0	Peak
6	* 5959.245	54.62	5.76	60.38	-7.82	68.20	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

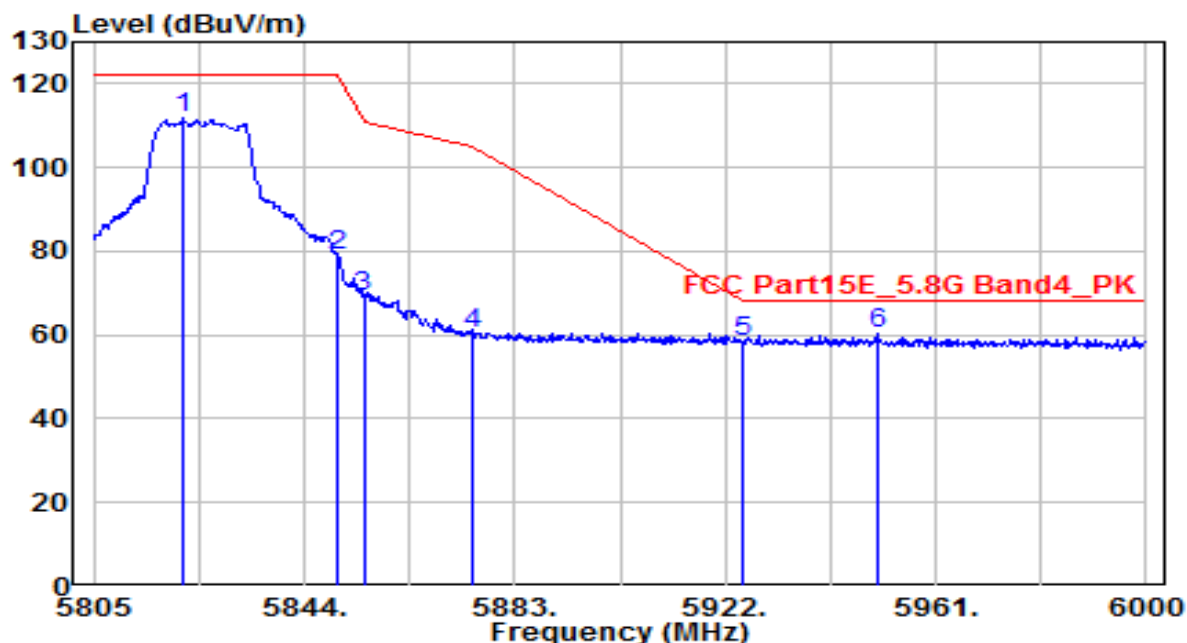


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.575	106.61	5.31	111.92	-10.28	122.20	100	335	Peak
2	5850.000	73.58	5.40	78.98	-43.22	122.20	100	335	Peak
3	5855.000	63.62	5.42	69.04	-41.76	110.80	100	335	Peak
4	5875.000	54.83	5.49	60.31	-44.89	105.20	100	335	Peak
5	5925.000	52.92	5.65	58.57	-9.63	68.20	100	335	Peak
6	* 5950.470	54.80	5.73	60.53	-7.67	68.20	100	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

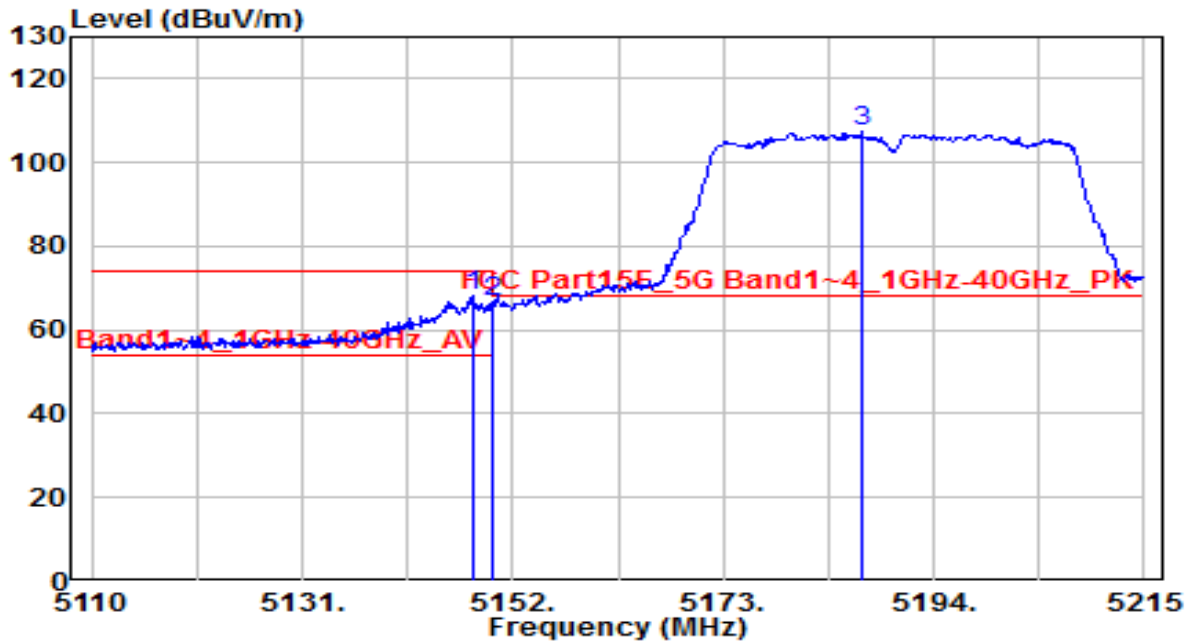


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.010	64.05	3.90	67.95	-6.05	74.00	150	205	Peak
2		5150.000	62.68	3.91	66.59	-7.41	74.00	150	205	Peak
3		5186.755	103.33	3.94	107.27	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

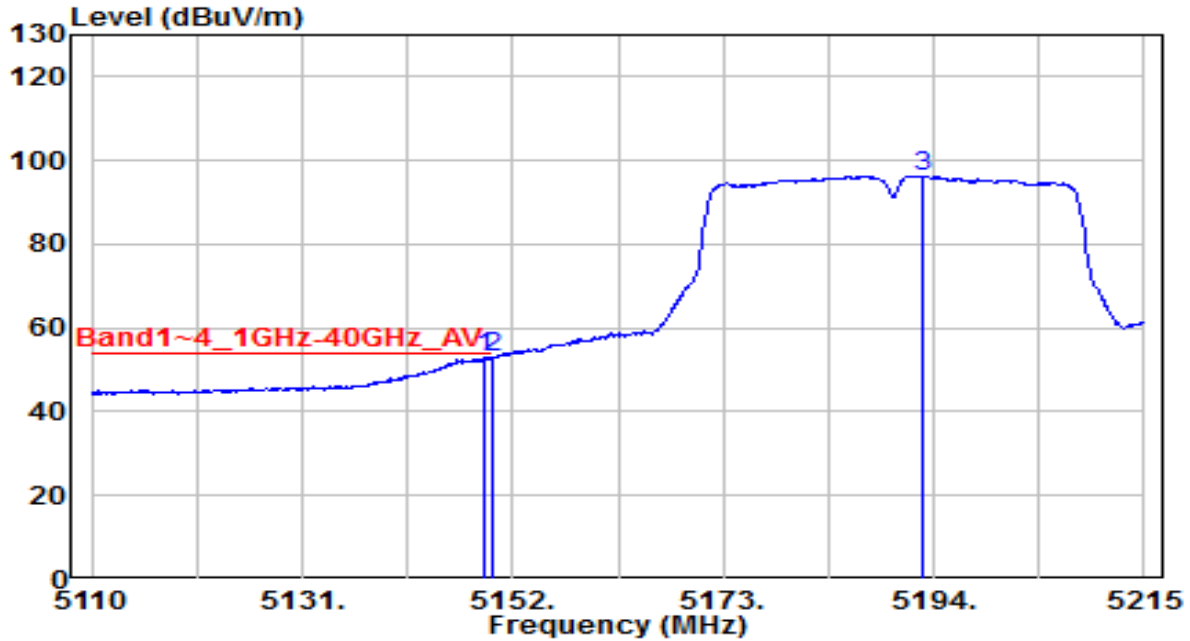


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.270	48.98	3.91	52.89	-1.11	54.00	150	205	Average
2	* 5150.000	49.00	3.91	52.91	-1.09	54.00	150	205	Average
3	5192.845	92.42	3.95	96.37	N/A	N/A	150	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

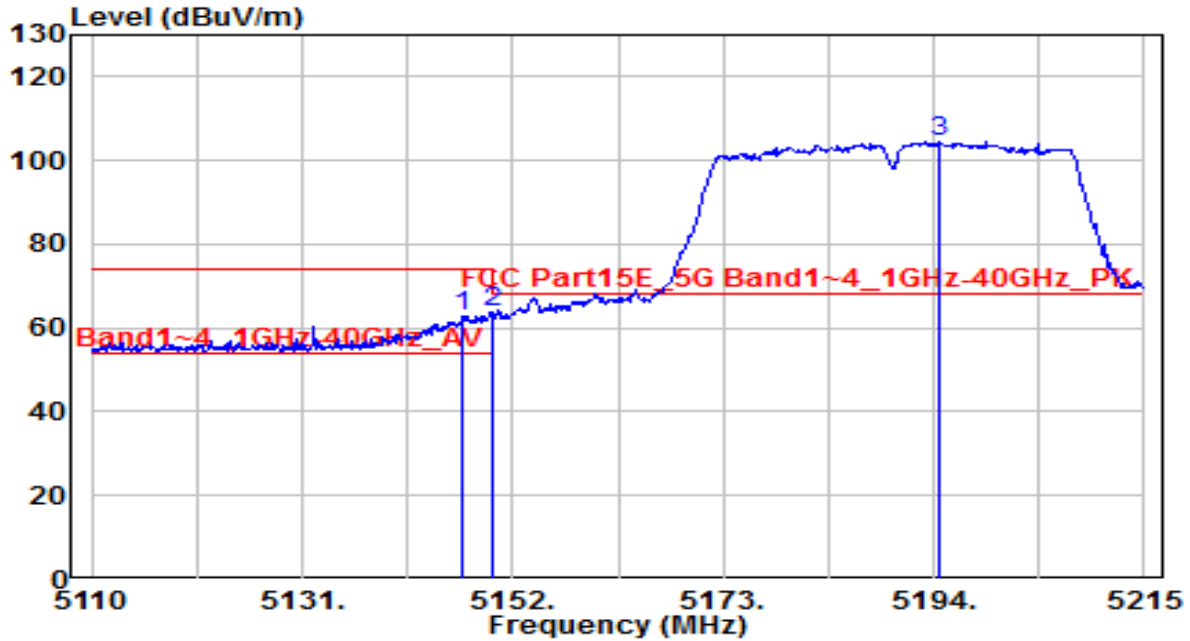


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.065	59.02	3.90	62.92	-11.08	74.00	150	80	Peak
2	* 5150.000	59.67	3.91	63.58	-10.42	74.00	150	80	Peak
3	5194.630	100.66	3.95	104.61	N/A	N/A	150	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

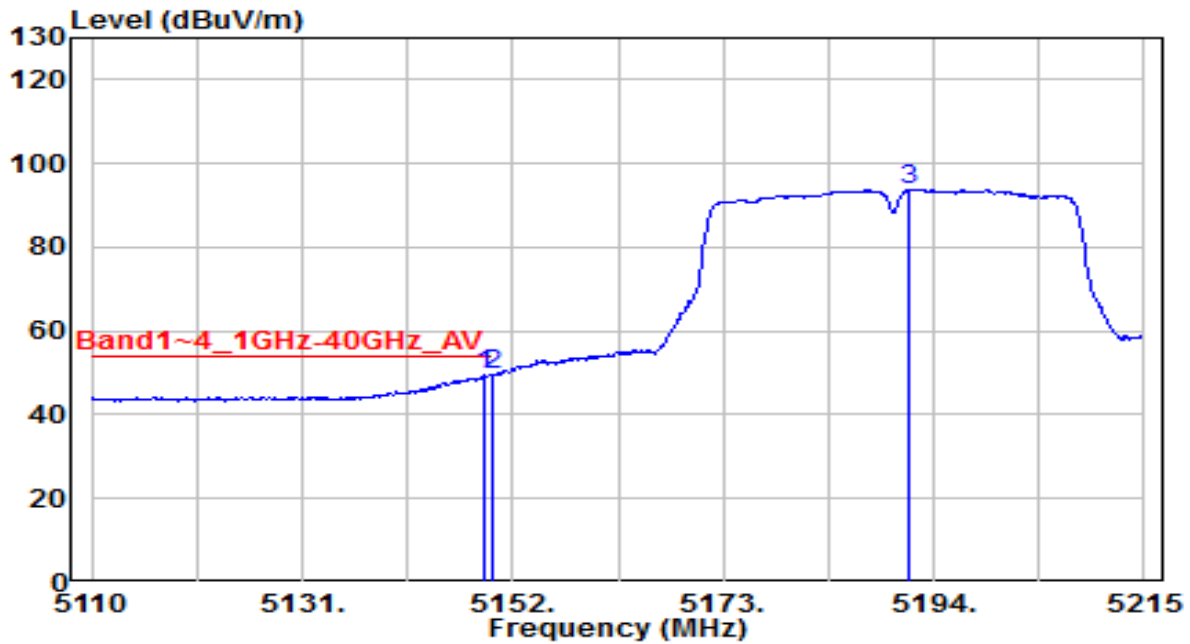


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.165	45.46	3.91	49.37	-4.63	54.00	150	80	Average
2	* 5150.000	45.57	3.91	49.47	-4.53	54.00	150	80	Average
3	5191.585	89.88	3.95	93.83	N/A	N/A	150	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

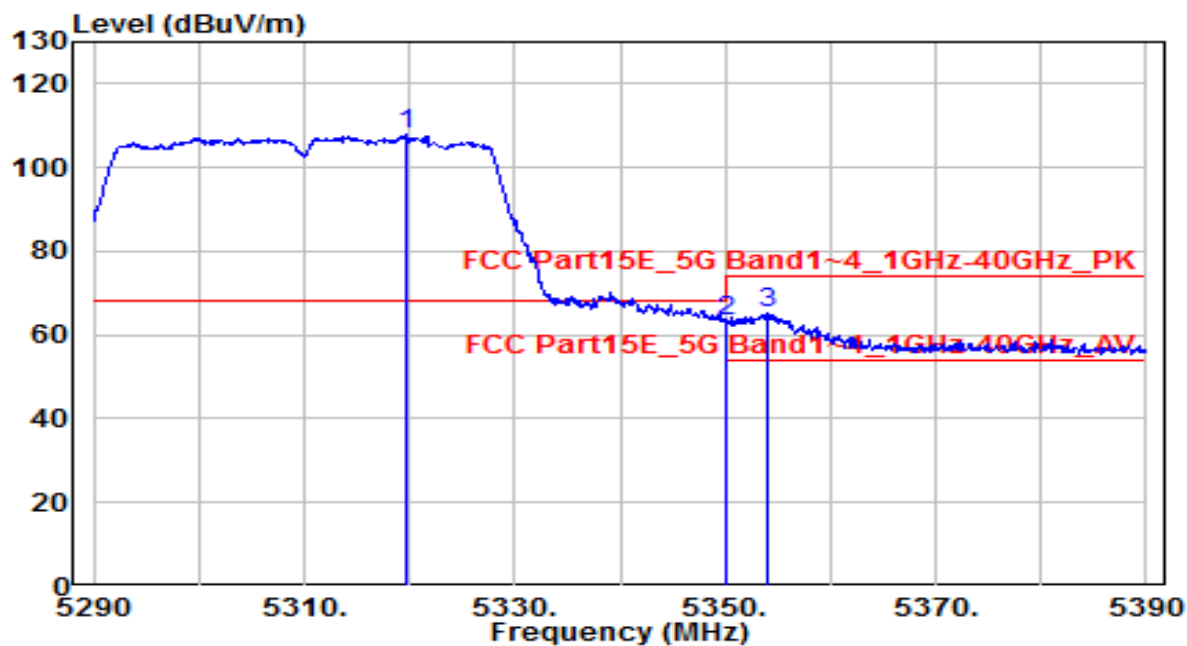


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.600	103.86	4.08	107.94	N/A	N/A	100	185	Peak
2	* 5350.000	59.20	4.11	63.31	-4.89	68.20	100	185	Peak
3	5353.900	61.11	4.12	65.23	-8.77	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

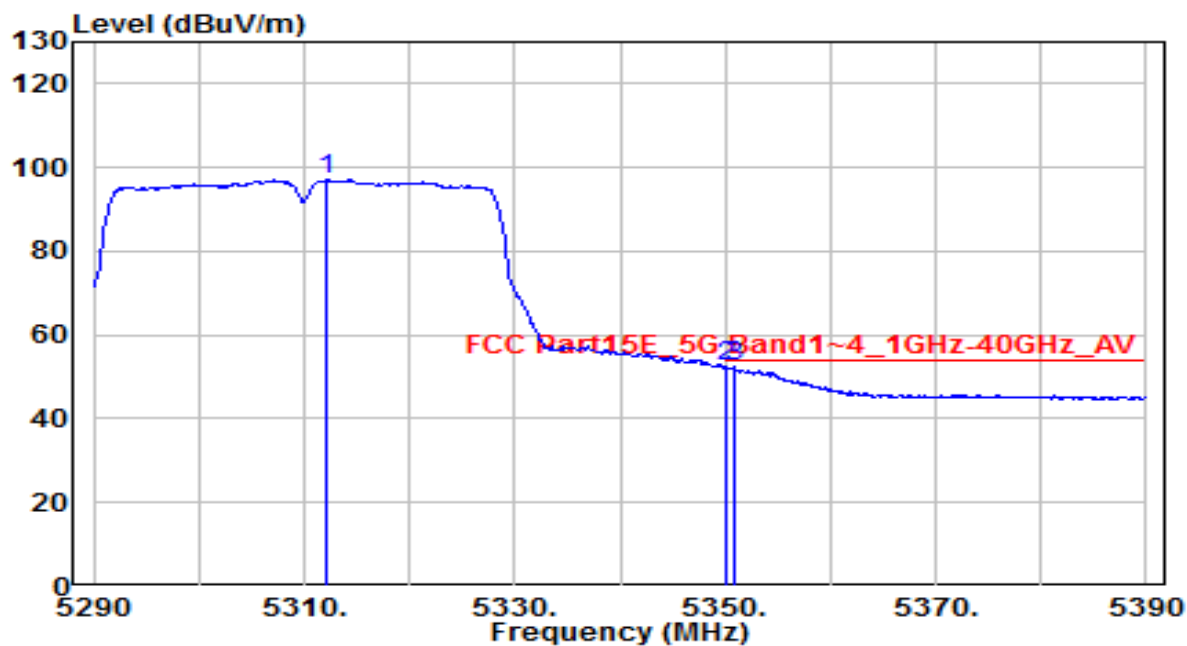


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.100	92.93	4.07	97.00	N/A	N/A	100	185	Average
2	* 5350.000	48.35	4.11	52.46	-1.54	54.00	100	185	Average
3	5350.800	48.26	4.11	52.37	-1.63	54.00	100	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

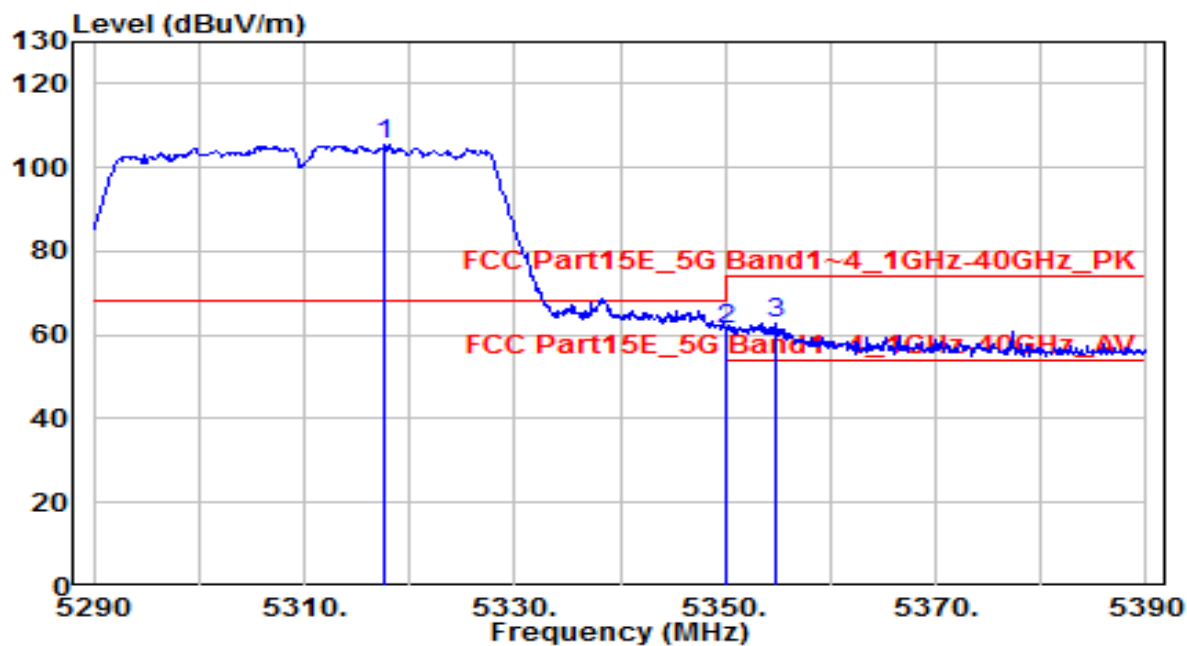


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.700	101.62	4.08	105.70	N/A	N/A	100	175	Peak
2	* 5350.000	57.03	4.11	61.14	-7.06	68.20	100	175	Peak
3	5354.800	58.87	4.12	62.99	-11.01	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

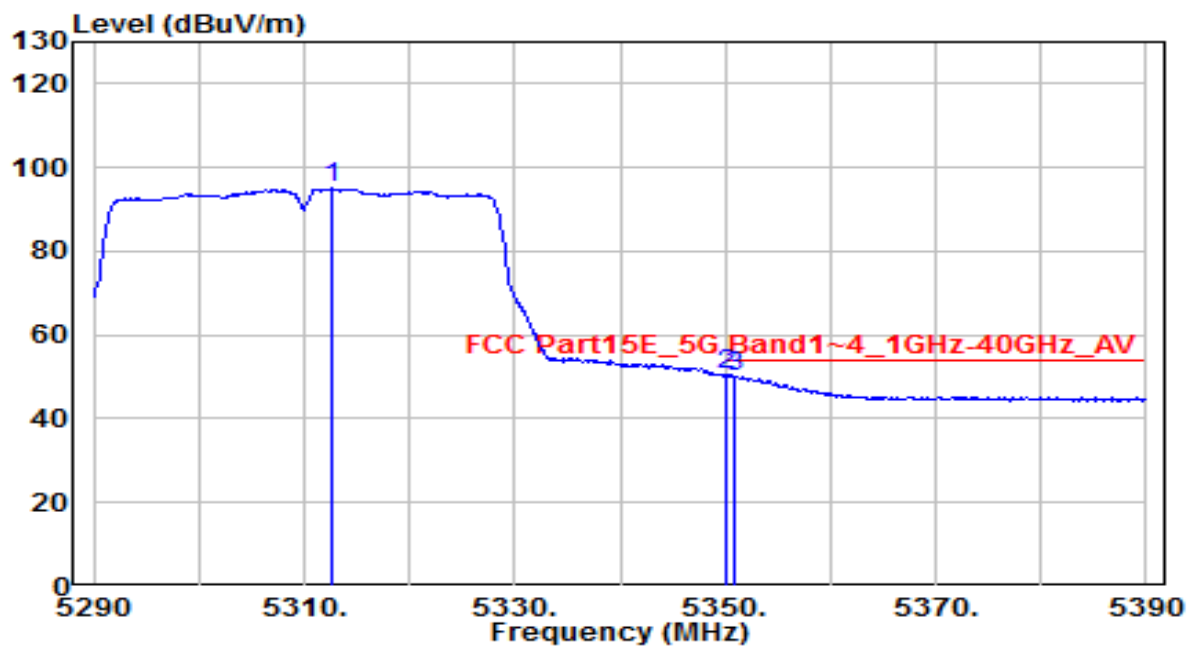


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.700	91.22	4.08	95.30	N/A	N/A	100	175	Average
2	* 5350.000	46.33	4.11	50.44	-3.56	54.00	100	175	Average
3	5350.900	46.03	4.11	50.14	-3.86	54.00	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

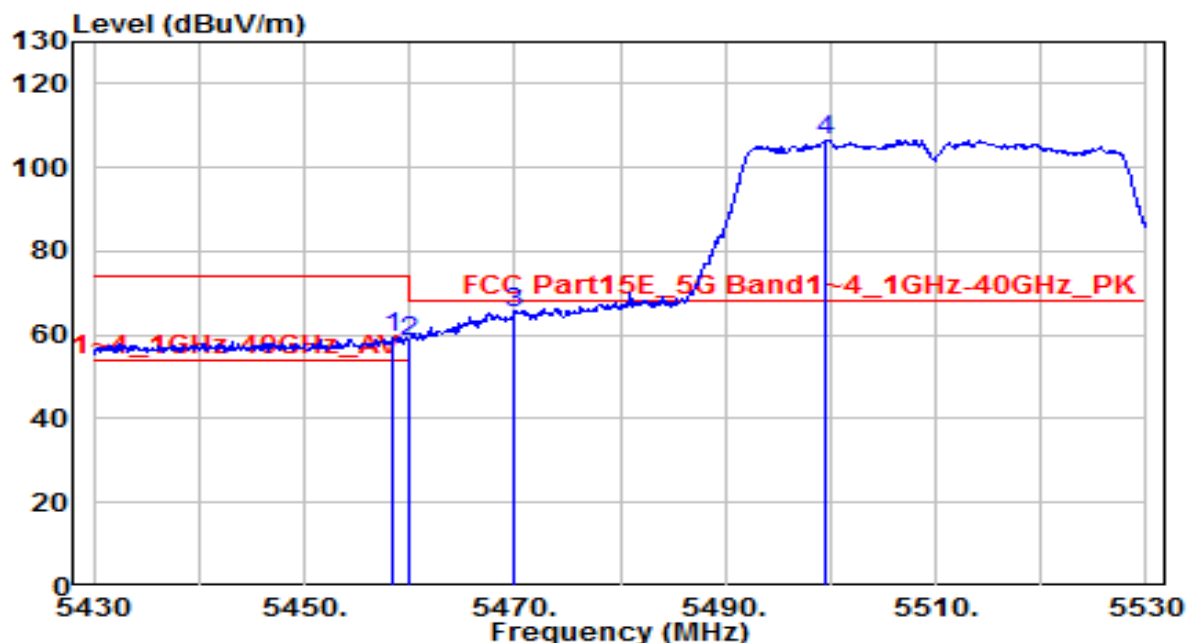


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.400	54.99	4.23	59.21	-14.79	74.00	100	175	Peak
2	5460.000	54.18	4.23	58.41	-9.79	68.20	100	175	Peak
3	* 5470.000	60.88	4.24	65.12	-3.08	68.20	100	175	Peak
4	5499.600	102.39	4.27	106.66	N/A	N/A	100	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

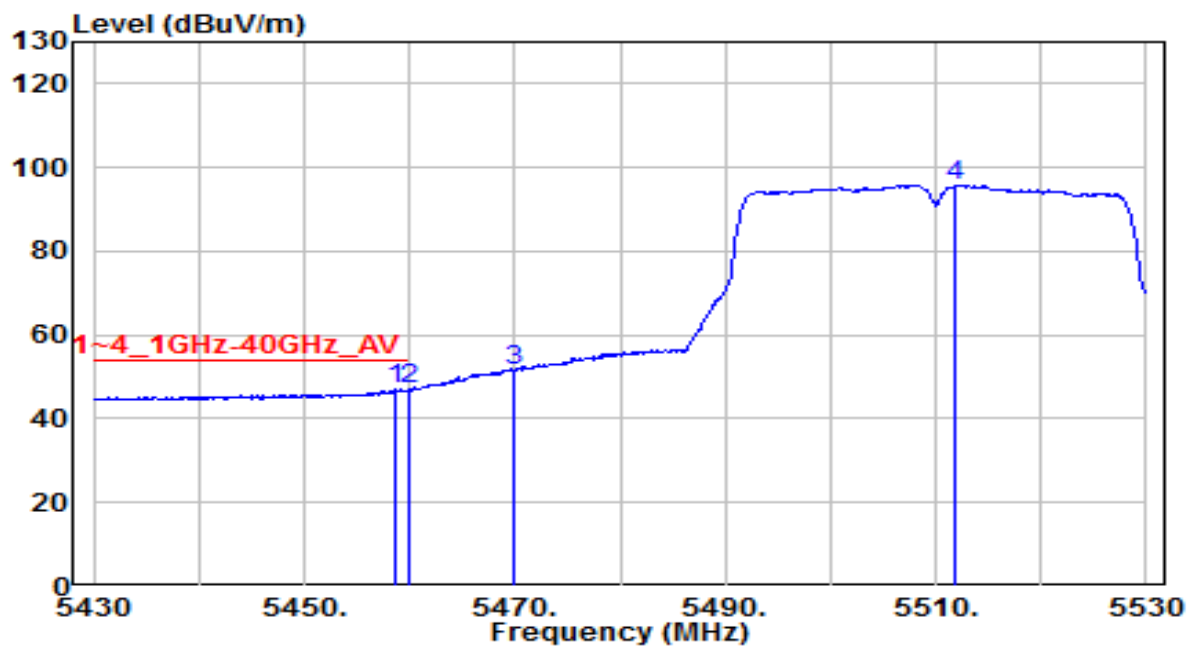


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	42.71	4.23	46.93	-7.07	54.00	100	175	Average
2		5460.000	42.68	4.23	46.91	-7.09	54.00	100	175	Average
3		5470.000	47.13	4.24	51.37	N/A	N/A	100	175	Average
4		5511.800	91.54	4.31	95.85	N/A	N/A	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

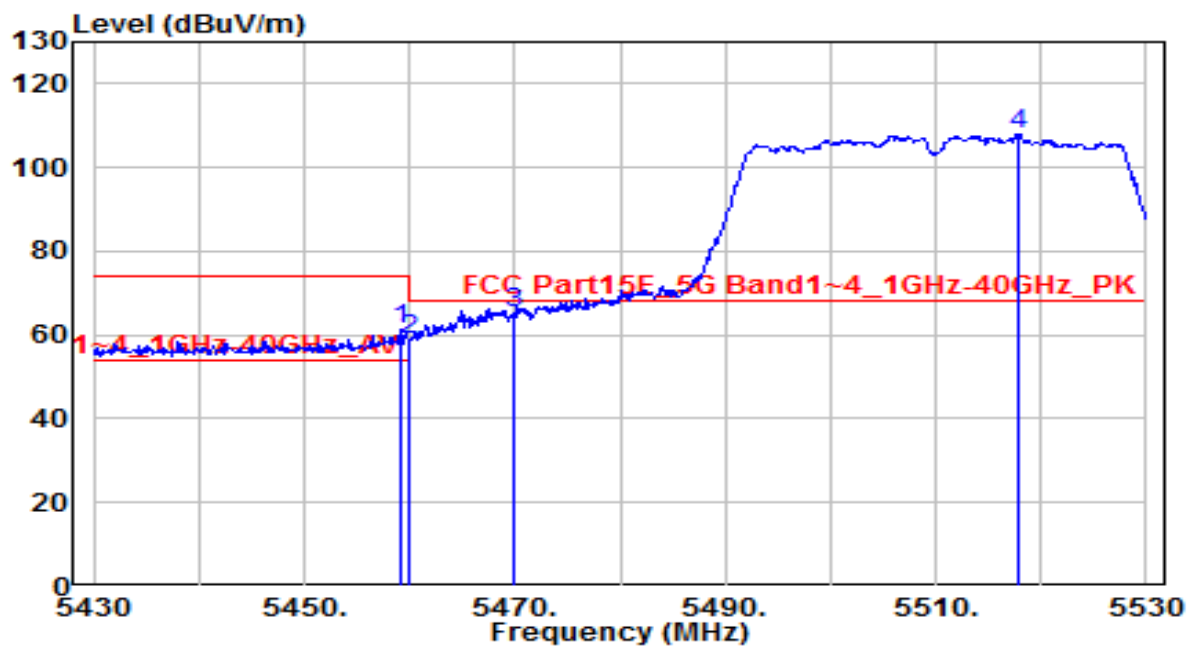


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.300	56.90	4.23	61.13	-12.87	74.00	100	180	Peak
2	5460.000	54.77	4.23	59.00	-9.20	68.20	100	180	Peak
3	* 5470.000	61.00	4.24	65.24	-2.96	68.20	100	180	Peak
4	5517.800	103.76	4.33	108.09	N/A	N/A	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

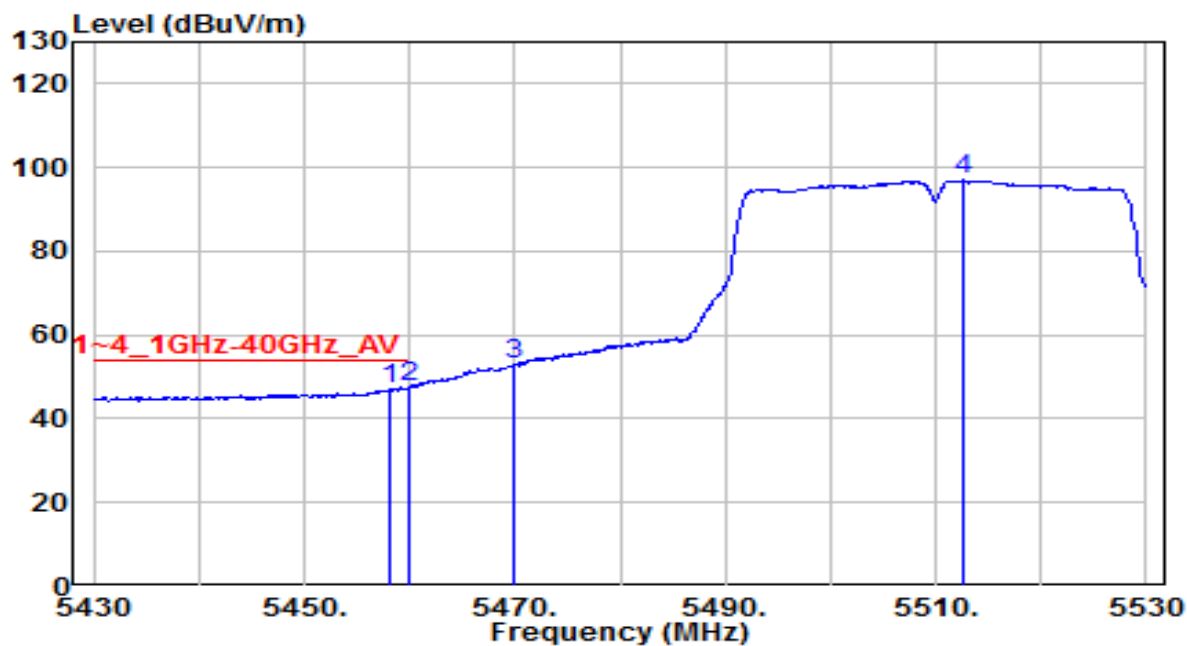


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	42.75	4.23	46.97	-7.03	54.00	100	180	Average
2	* 5460.000	43.19	4.23	47.42	-6.58	54.00	100	180	Average
3	5470.000	48.65	4.24	52.89	N/A	N/A	100	180	Average
4	5512.600	92.68	4.31	96.99	N/A	N/A	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

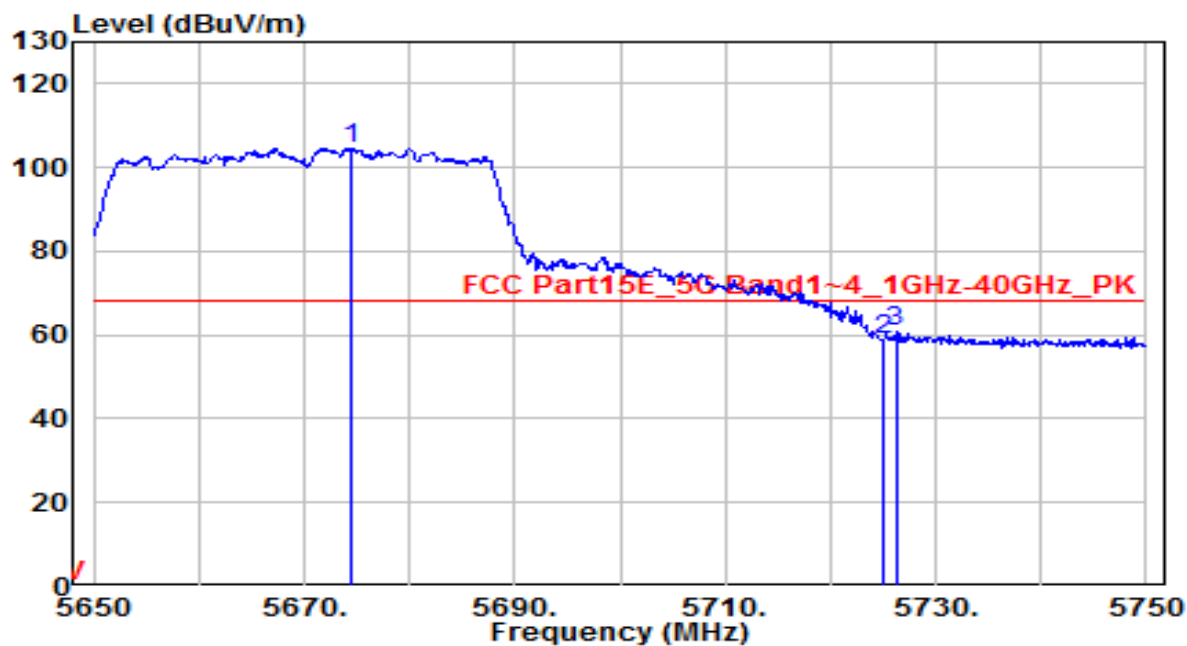


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.400	99.77	4.84	104.61	N/A	N/A	150	250	Peak
2	5725.000	53.71	5.00	58.71	-9.49	68.20	150	250	Peak
3	* 5726.200	56.04	5.00	61.04	-7.16	68.20	150	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

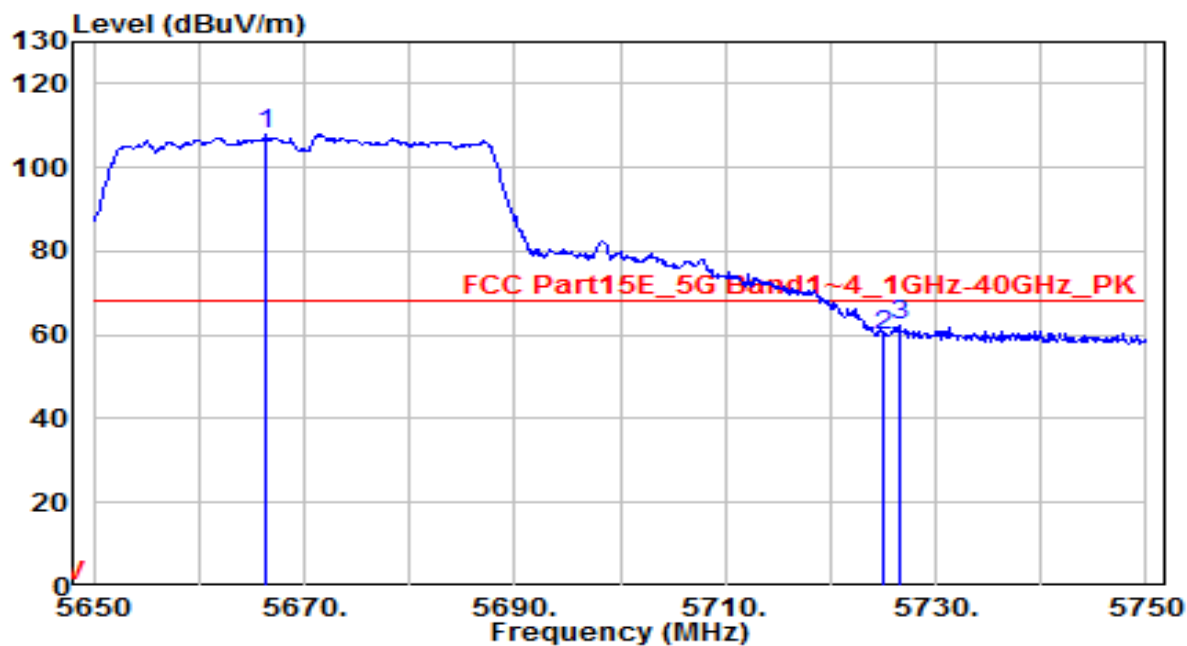


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.400	103.24	4.81	108.05	N/A	N/A	120	180	Peak
2	5725.000	54.73	5.00	59.73	-8.47	68.20	120	180	Peak
3	* 5726.500	57.17	5.00	62.17	-6.03	68.20	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

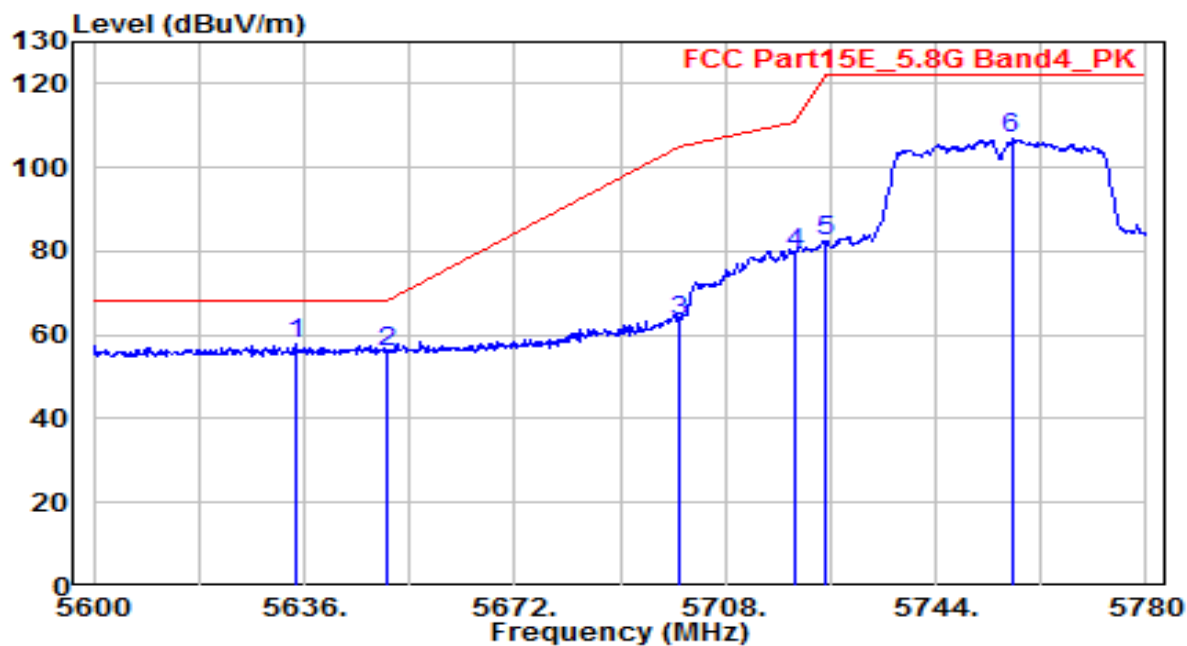


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5634.560	53.14	4.71	57.84	-10.36	68.20	115	180	Peak
2		5650.000	51.35	4.76	56.10	-12.10	68.20	115	180	Peak
3		5700.000	58.25	4.92	63.17	-42.03	105.20	115	180	Peak
4		5720.000	74.70	4.98	79.69	-31.11	110.80	115	180	Peak
5		5725.000	77.36	5.00	82.36	-39.84	122.20	115	180	Peak
6		5756.960	101.97	5.10	107.07	-15.13	122.20	115	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

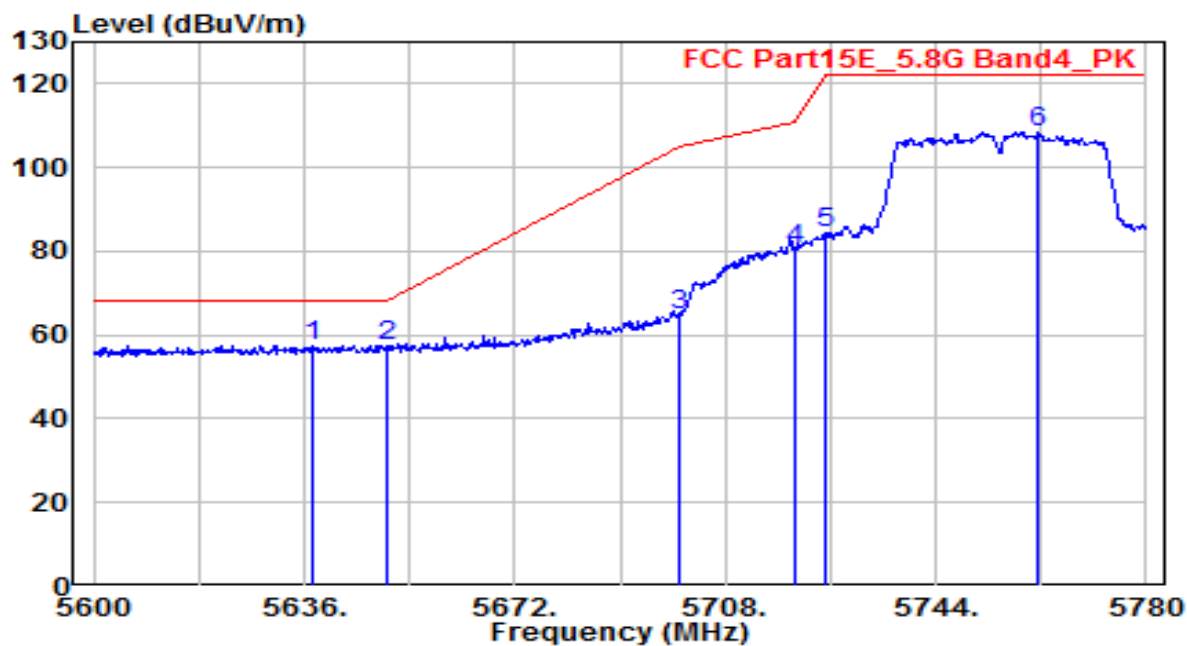


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5637.260	52.83	4.71	57.55	-10.65	68.20	105	0	Peak
2	* 5650.000	52.87	4.76	57.63	-10.57	68.20	105	0	Peak
3	5700.000	59.99	4.92	64.91	-40.29	105.20	105	0	Peak
4	5720.000	75.68	4.98	80.66	-30.14	110.80	105	0	Peak
5	5725.000	79.21	5.00	84.21	-37.99	122.20	105	0	Peak
6	5761.640	103.49	5.12	108.60	-13.60	122.20	105	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

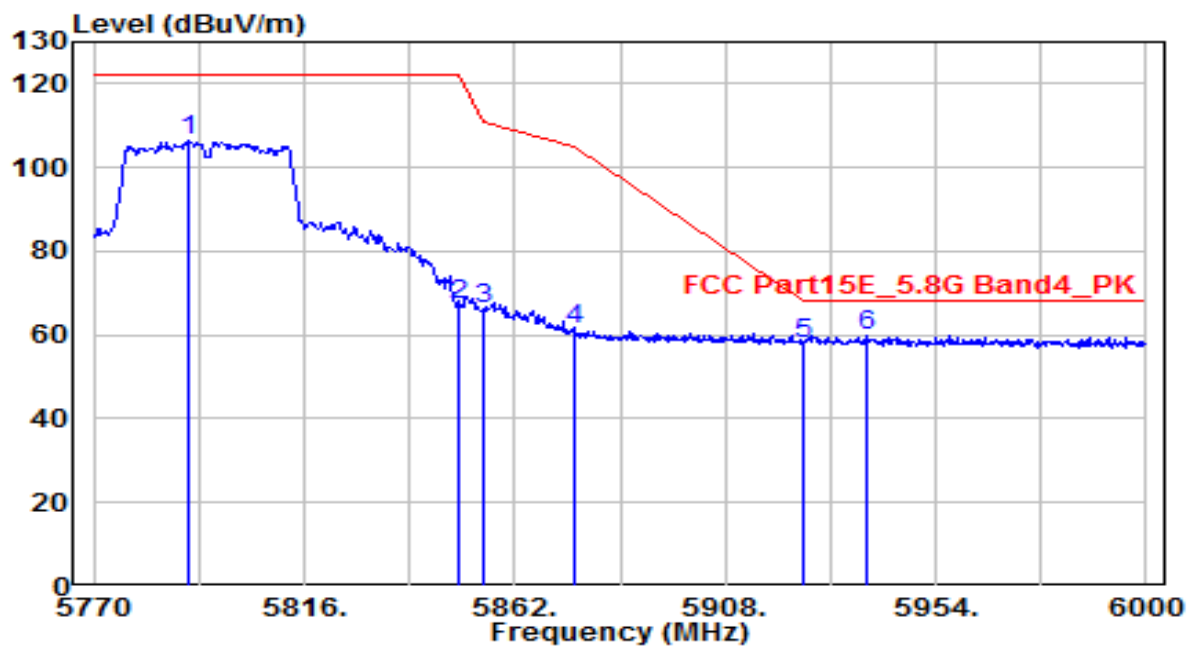


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.930	101.05	5.21	106.27	-15.93	122.20	150	0	Peak
2	5850.000	61.61	5.40	67.01	-55.19	122.20	150	0	Peak
3	5855.000	60.58	5.42	66.01	-44.79	110.80	150	0	Peak
4	5875.000	55.77	5.49	61.26	-43.94	105.20	150	0	Peak
5	5925.000	52.45	5.65	58.10	-10.10	68.20	150	0	Peak
6	* 5939.050	54.21	5.69	59.90	-8.30	68.20	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

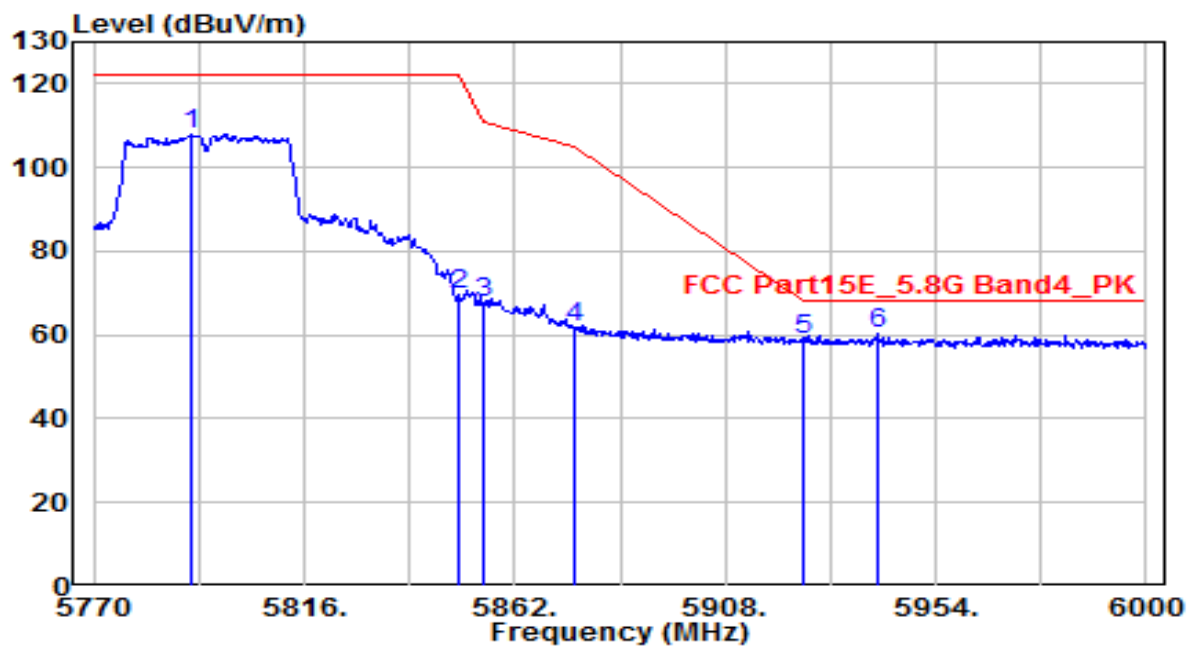


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.390	102.70	5.21	107.92	-14.28	122.20	150	340	Peak
2	5850.000	64.41	5.40	69.81	-52.39	122.20	150	340	Peak
3	5855.000	62.24	5.42	67.66	-43.14	110.80	150	340	Peak
4	5875.000	56.15	5.49	61.63	-43.57	105.20	150	340	Peak
5	5925.000	53.01	5.65	58.66	-9.54	68.20	150	340	Peak
6	* 5941.120	54.75	5.70	60.45	-7.75	68.20	150	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

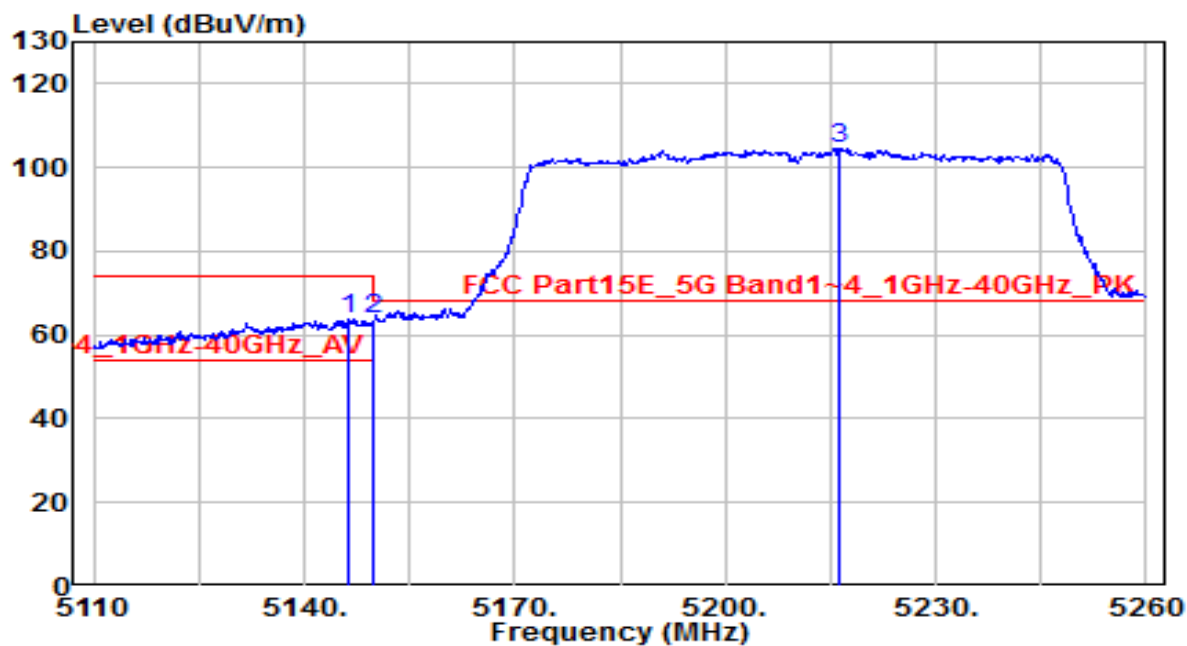


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.300	59.84	3.90	63.74	-10.26	74.00	130	205	Peak
2		5150.000	59.84	3.91	63.74	-10.26	74.00	130	205	Peak
3		5216.350	100.72	3.98	104.69	N/A	N/A	130	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

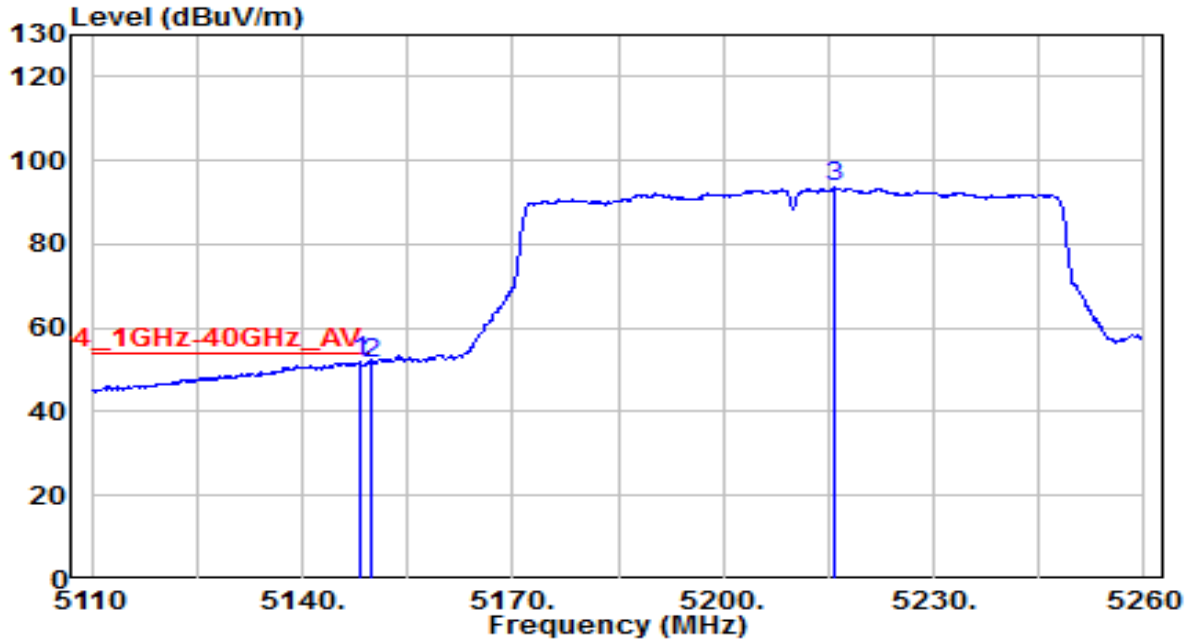


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.400	47.88	3.90	51.79	-2.21	54.00	130	205	Average
2		5150.000	47.70	3.91	51.61	-2.39	54.00	130	205	Average
3		5215.900	89.64	3.97	93.62	N/A	N/A	130	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

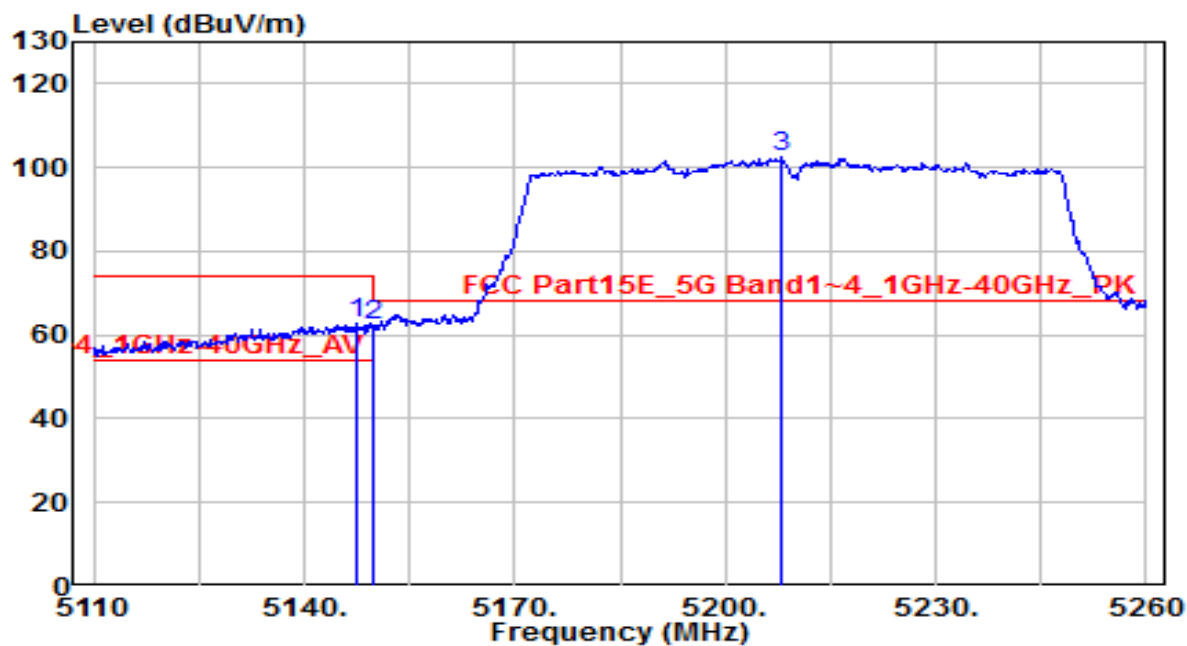


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.650	59.11	3.90	63.01	-10.99	74.00	150	335	Peak
2	5150.000	58.44	3.91	62.35	-11.65	74.00	150	335	Peak
3	5208.100	98.49	3.97	102.46	N/A	N/A	150	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

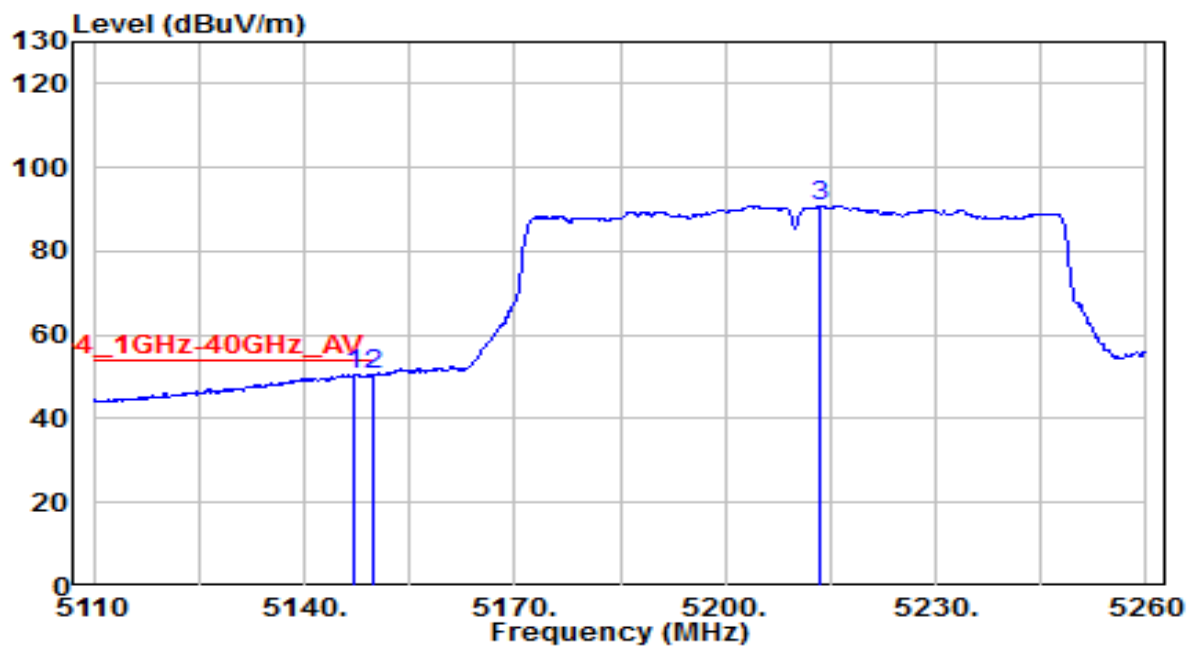


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.200	46.67	3.90	50.57	-3.43	54.00	150	335	Average
2		5150.000	46.50	3.91	50.41	-3.59	54.00	150	335	Average
3		5213.500	87.02	3.97	90.99	N/A	N/A	150	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

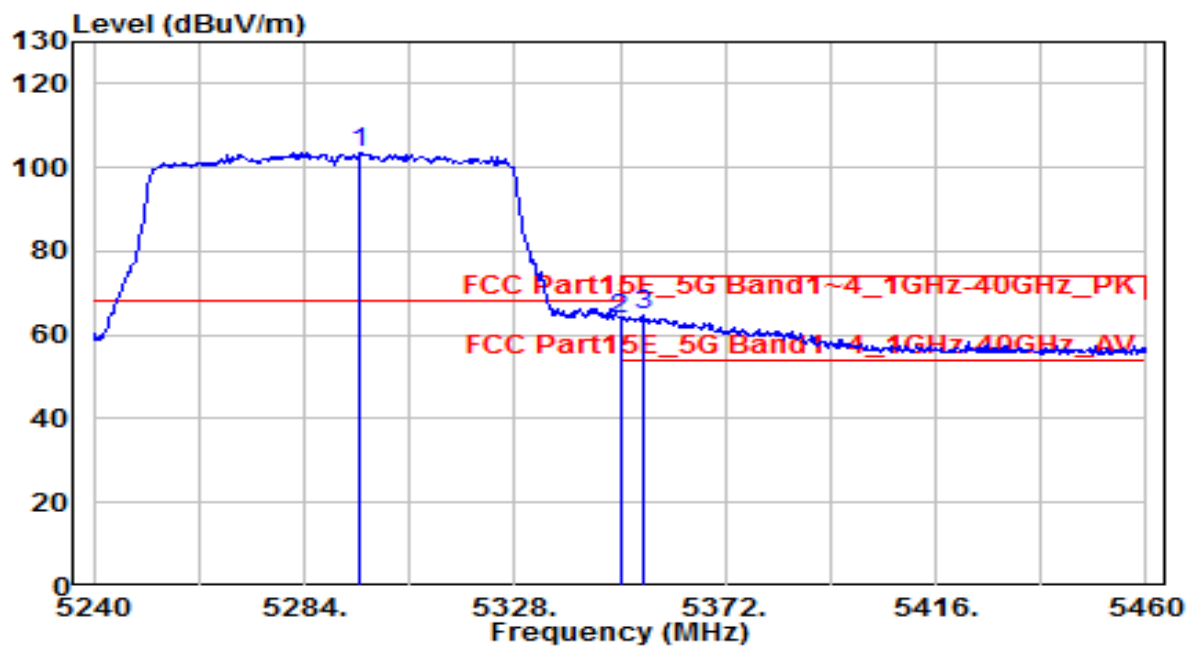


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.440	99.65	4.06	103.70	N/A	N/A	120	195	Peak
2	* 5350.000	59.76	4.11	63.87	-4.33	68.20	120	195	Peak
3	5355.060	60.62	4.12	64.74	-9.26	74.00	120	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

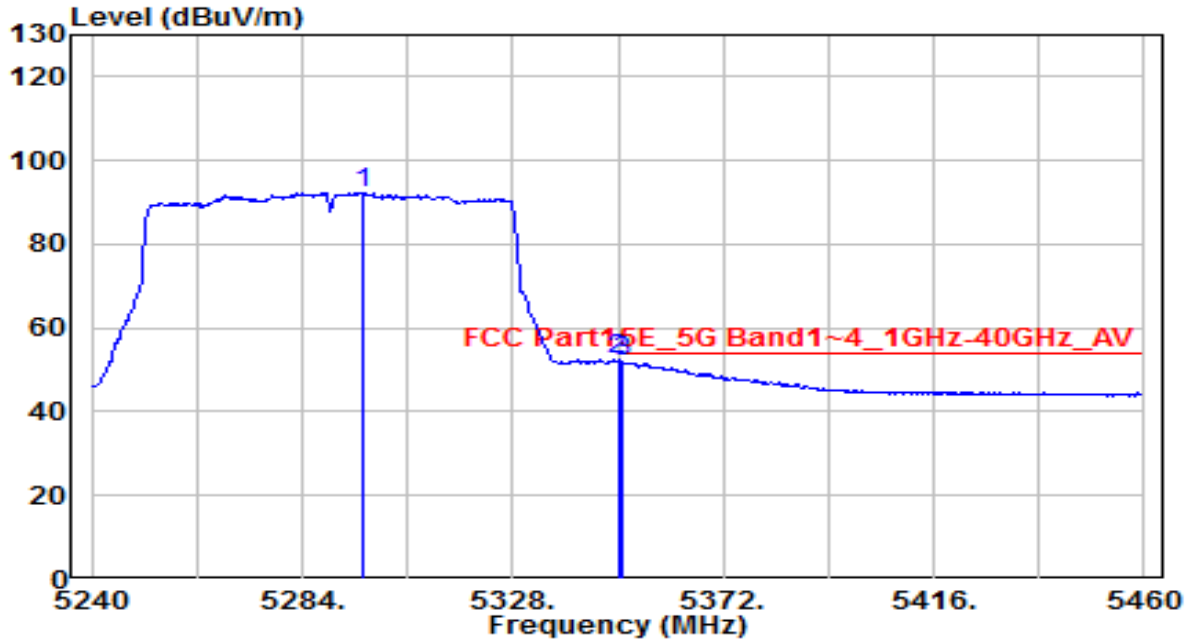


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.760	88.39	4.06	92.45	N/A	N/A	120	195	Average
2	* 5350.000	48.32	4.11	52.44	-1.56	54.00	120	195	Average
3	5350.880	47.70	4.11	51.81	-2.19	54.00	120	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

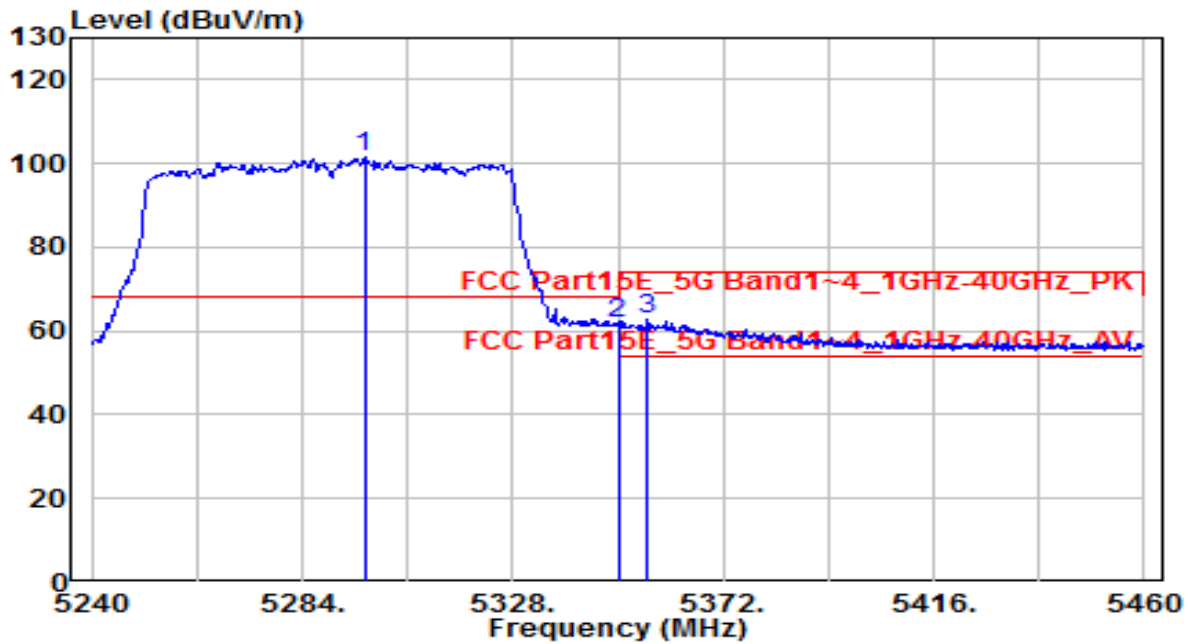


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.980	97.32	4.06	101.38	N/A	N/A	120	170	Peak
2	* 5350.000	57.65	4.11	61.76	-6.44	68.20	120	170	Peak
3	5356.160	58.77	4.12	62.89	-11.11	74.00	120	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

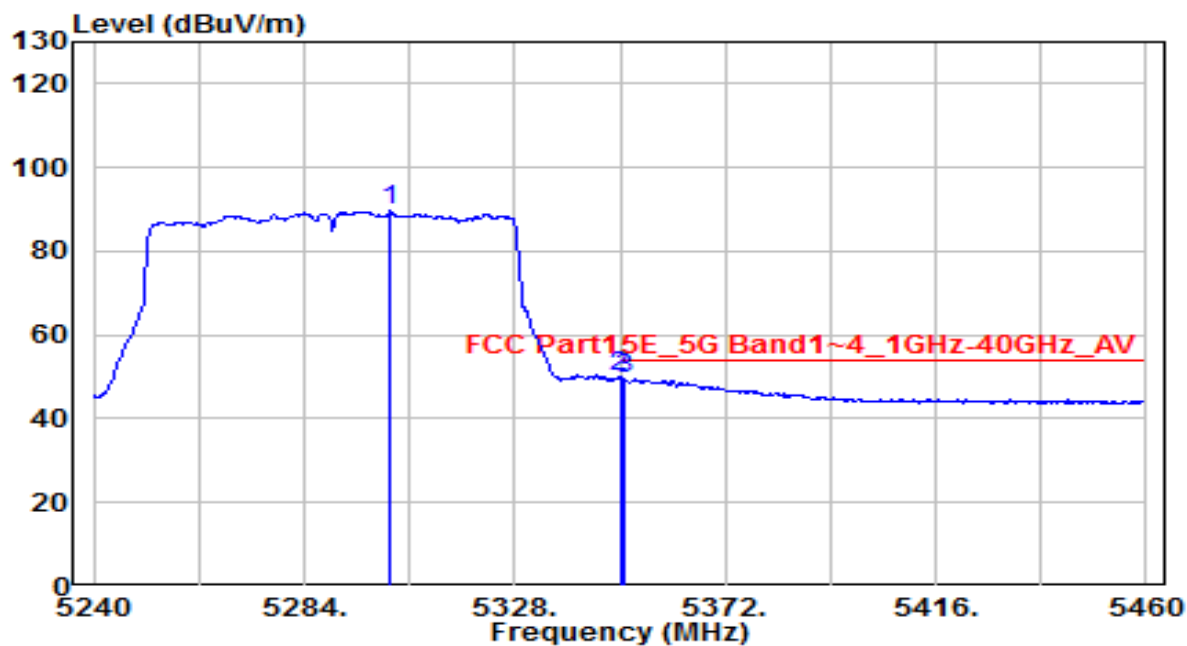


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.040	85.50	4.06	89.56	N/A	N/A	120	170	Average
2	* 5350.000	45.70	4.11	49.82	-4.18	54.00	120	170	Average
3	5350.660	45.50	4.11	49.61	-4.39	54.00	120	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

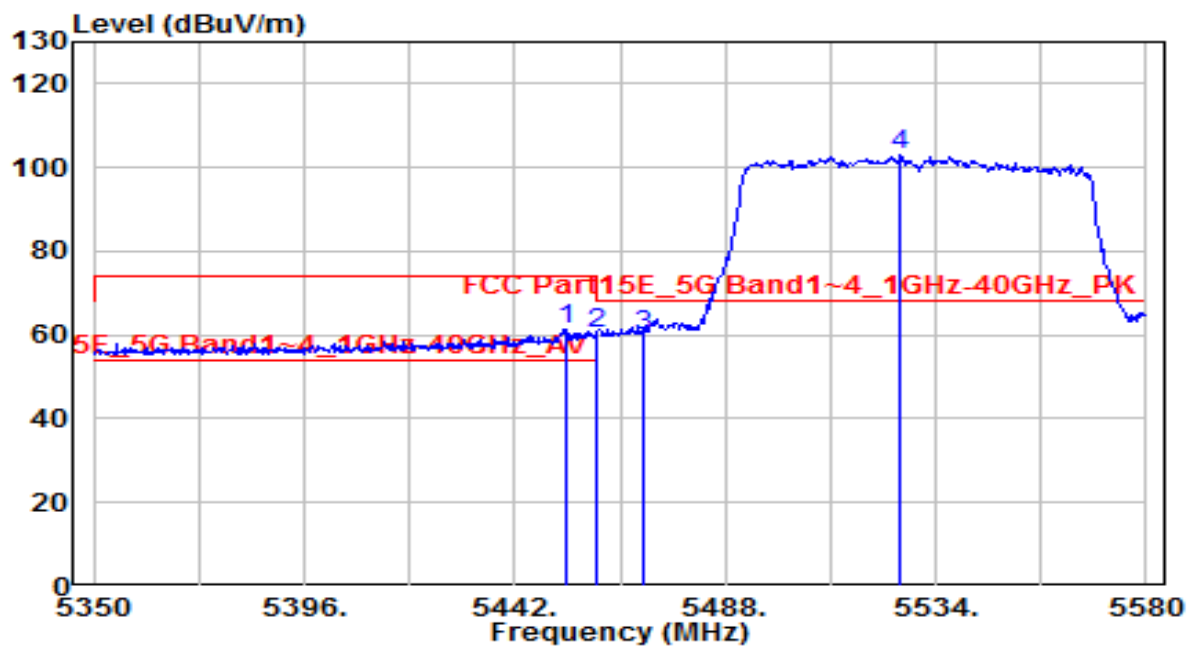


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.500	56.95	4.22	61.17	-12.83	74.00	105	185	Peak
2	* 5460.000	55.95	4.23	60.18	-8.02	68.20	105	185	Peak
3	5470.000	55.77	4.24	60.01	-8.19	68.20	105	185	Peak
4	5526.410	98.55	4.36	102.91	N/A	N/A	105	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

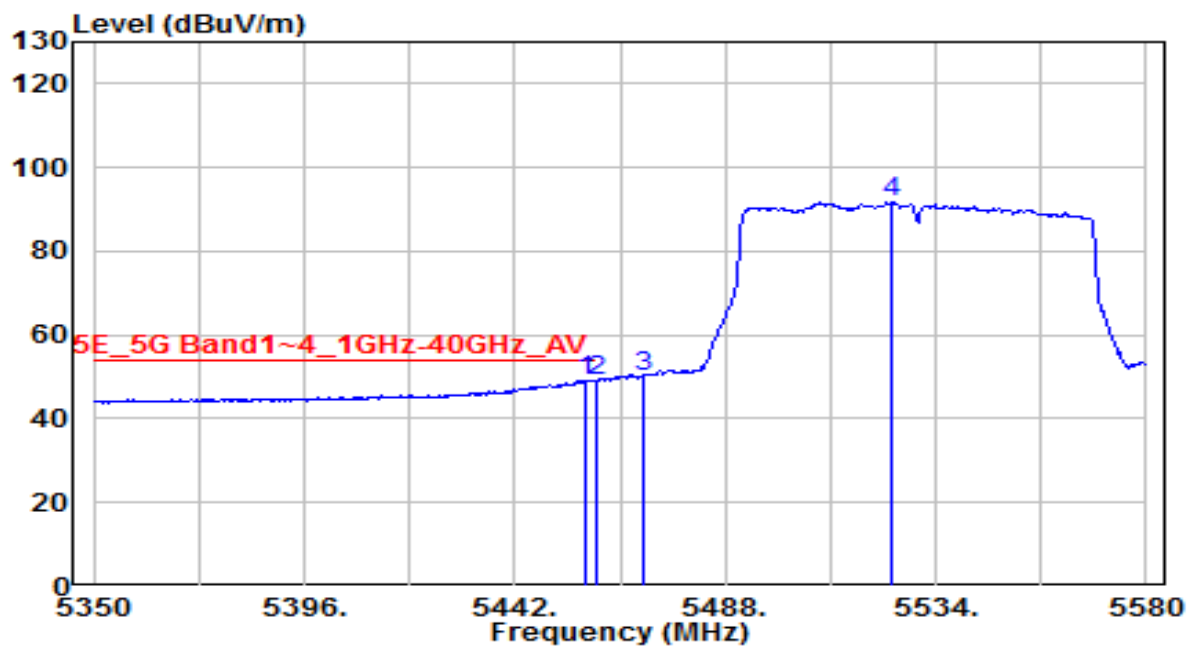


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.410	45.01	4.23	49.23	-4.77	54.00	105	185	Average
2		5460.000	44.87	4.23	49.10	-4.90	54.00	105	185	Average
3		5470.000	46.01	4.24	50.25	N/A	N/A	105	185	Average
4		5524.570	87.27	4.35	91.61	N/A	N/A	105	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

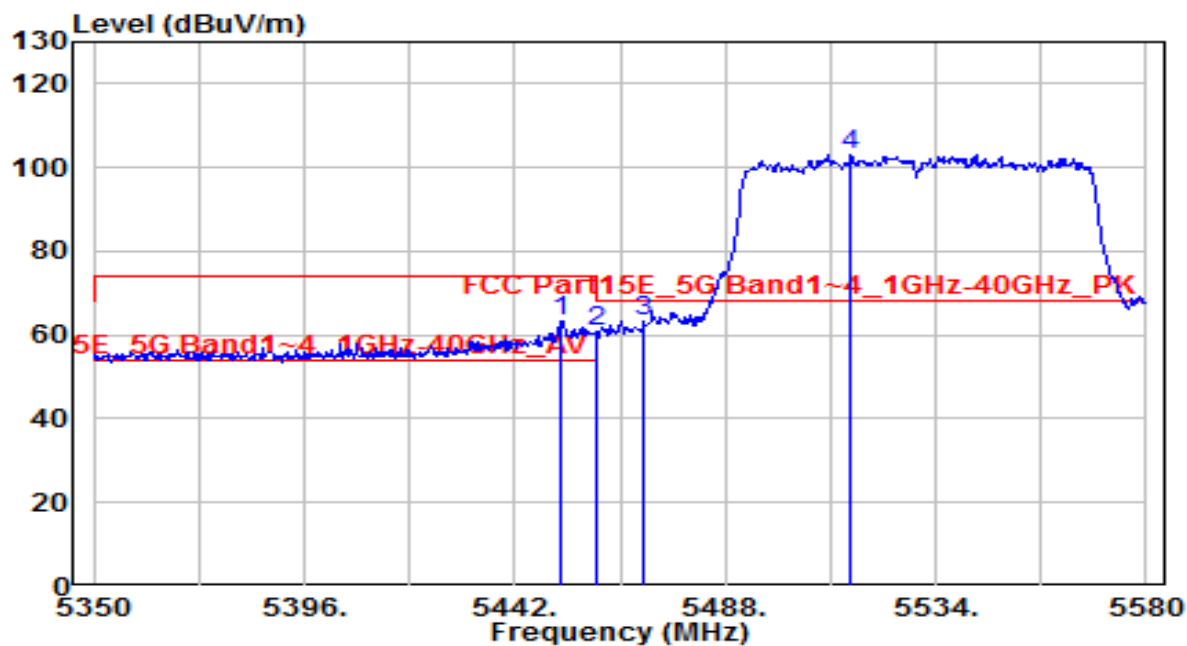


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.120	59.23	4.22	63.45	-10.55	74.00	120	180	Peak
2	5459.940	56.83	4.23	61.06	-12.94	74.00	120	180	Peak
3	5470.000	59.23	4.24	63.47	-4.73	68.20	120	180	Peak
4	* 5515.600	98.74	4.32	103.06	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

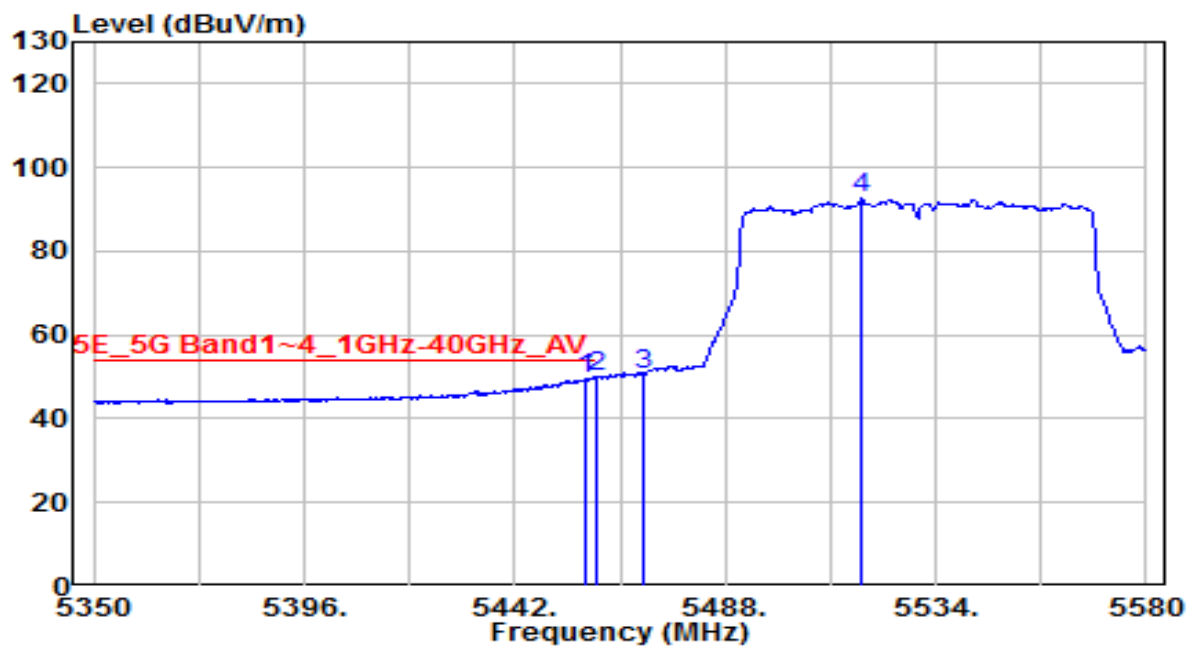


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.410	45.52	4.23	49.74	-4.26	54.00	120	180	Average
2	* 5460.000	45.57	4.23	49.80	-4.20	54.00	120	180	Average
3	5470.000	46.43	4.24	50.67	N/A	N/A	120	180	Average
4	5517.670	88.17	4.33	92.50	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

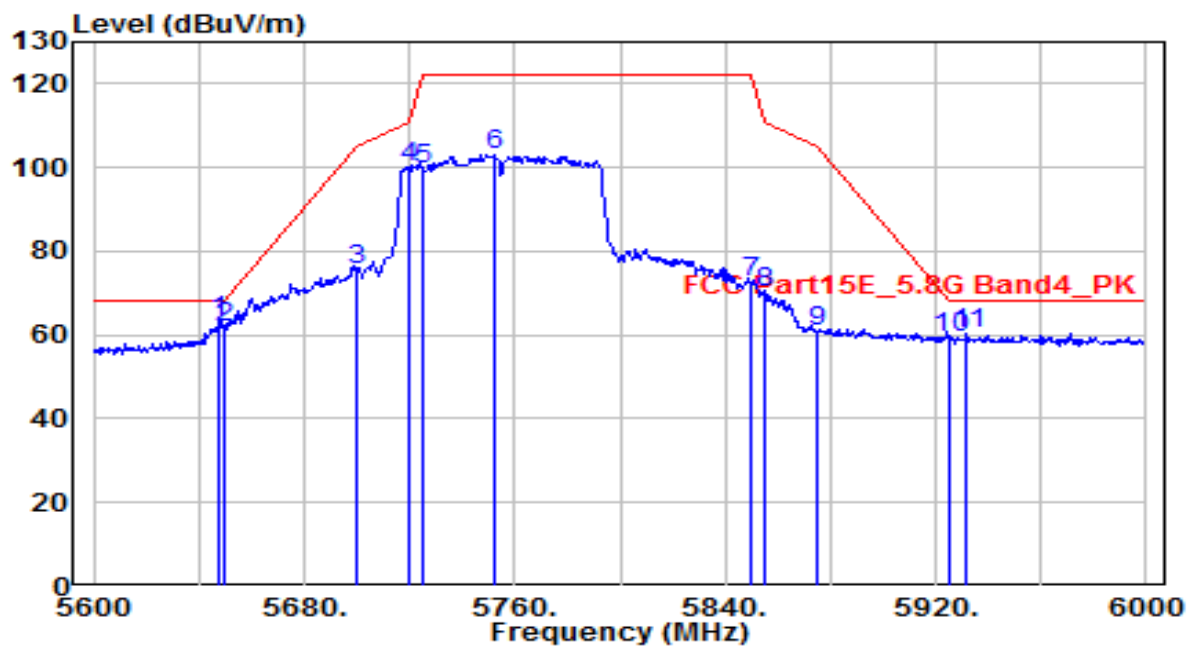


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	58.54	4.75	63.29	-4.91	68.20	100	0	Peak
2		5650.000	57.27	4.76	62.02	-6.18	68.20	100	0	Peak
3		5700.000	70.41	4.92	75.33	-29.87	105.20	100	0	Peak
4		5720.000	95.00	4.98	99.99	-10.81	110.80	100	0	Peak
5		5725.000	94.47	5.00	99.47	-22.73	122.20	100	0	Peak
6		5752.000	97.84	5.09	102.92	-19.28	122.20	100	0	Peak
7		5850.000	67.40	5.40	72.80	-49.40	122.20	100	0	Peak
8		5855.000	64.90	5.42	70.32	-40.48	110.80	100	0	Peak
9		5875.000	55.42	5.49	60.90	-44.30	105.20	100	0	Peak
10		5925.000	53.68	5.65	59.33	-8.87	68.20	100	0	Peak
11		5932.000	54.66	5.67	60.33	-7.87	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-08
Factor	BBHA 9120D	Temp. / Humidity	23°C /51%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

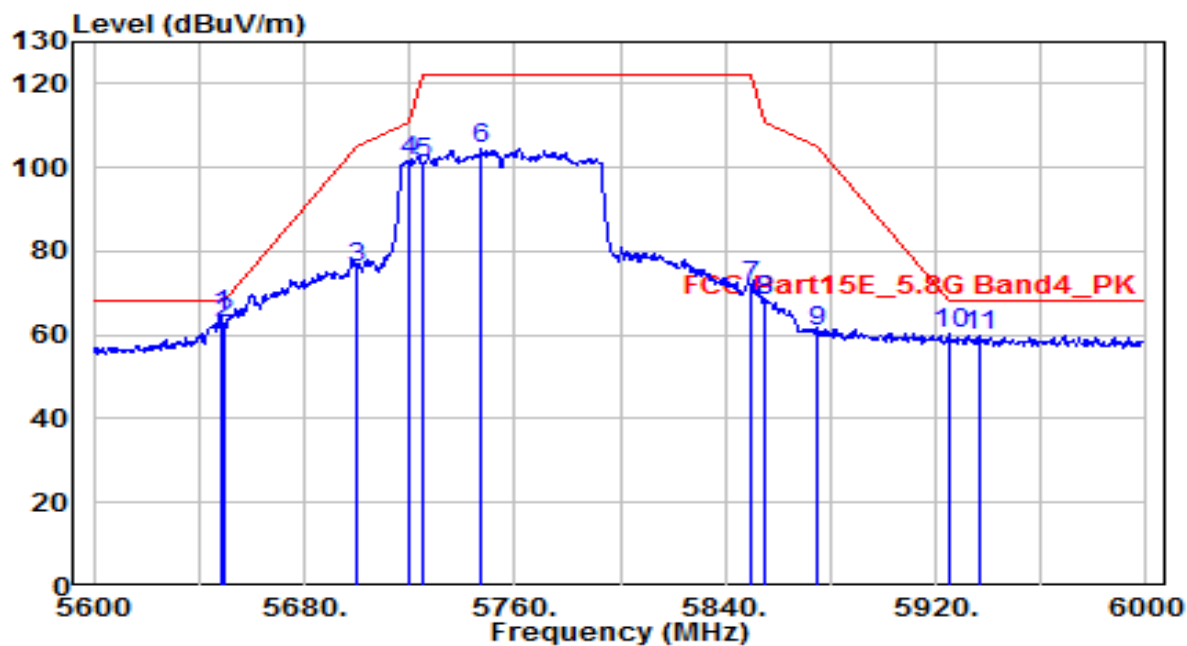

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	60.10	4.75	64.85	-3.35	68.20	115	180	Peak
2		5650.000	58.10	4.76	62.86	-5.34	68.20	115	180	Peak
3		5700.000	71.18	4.92	76.10	-29.10	105.20	115	180	Peak
4		5720.000	96.66	4.98	101.64	-9.16	110.80	115	180	Peak
5		5725.000	96.01	5.00	101.01	-21.19	122.20	115	180	Peak
6		5747.200	99.53	5.07	104.60	-17.60	122.20	115	180	Peak
7		5850.000	66.37	5.40	71.77	-50.43	122.20	115	180	Peak
8		5855.000	62.59	5.42	68.01	-42.79	110.80	115	180	Peak
9		5875.000	55.43	5.49	60.91	-44.29	105.20	115	180	Peak
10		5925.000	54.54	5.65	60.19	-8.01	68.20	115	180	Peak
11		5936.400	54.25	5.68	59.93	-8.27	68.20	115	180	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

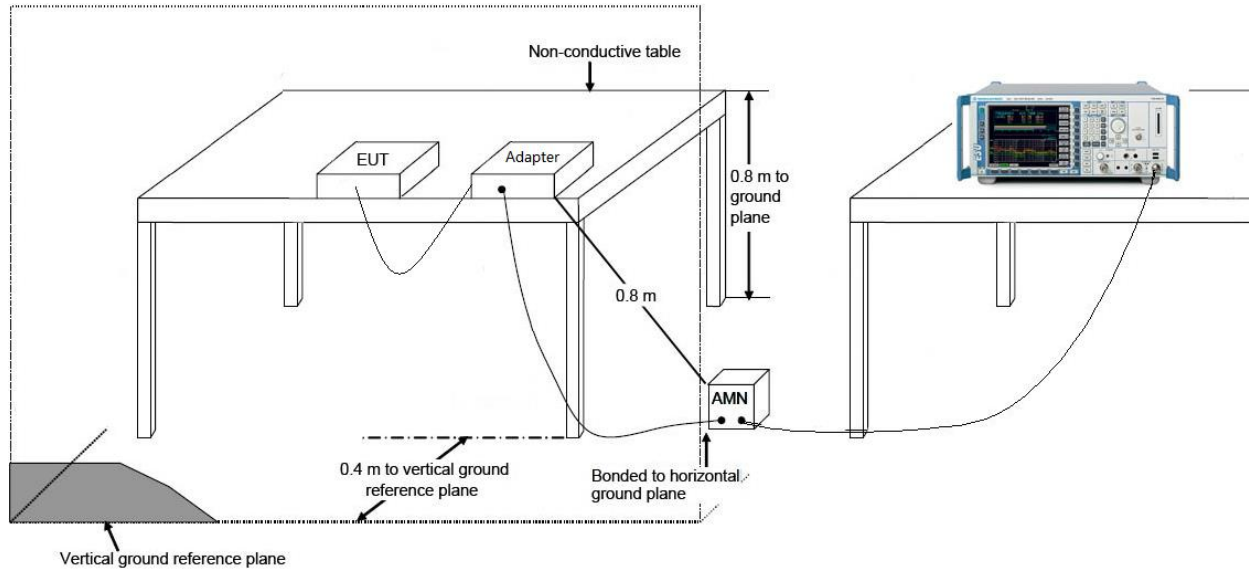

7.9.4. Test Result

EUT	Handheld Data Terminal	Date of Test	2021-01-25
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /67%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH36_ANT 0+1	Test Voltage	AC 120V/60Hz

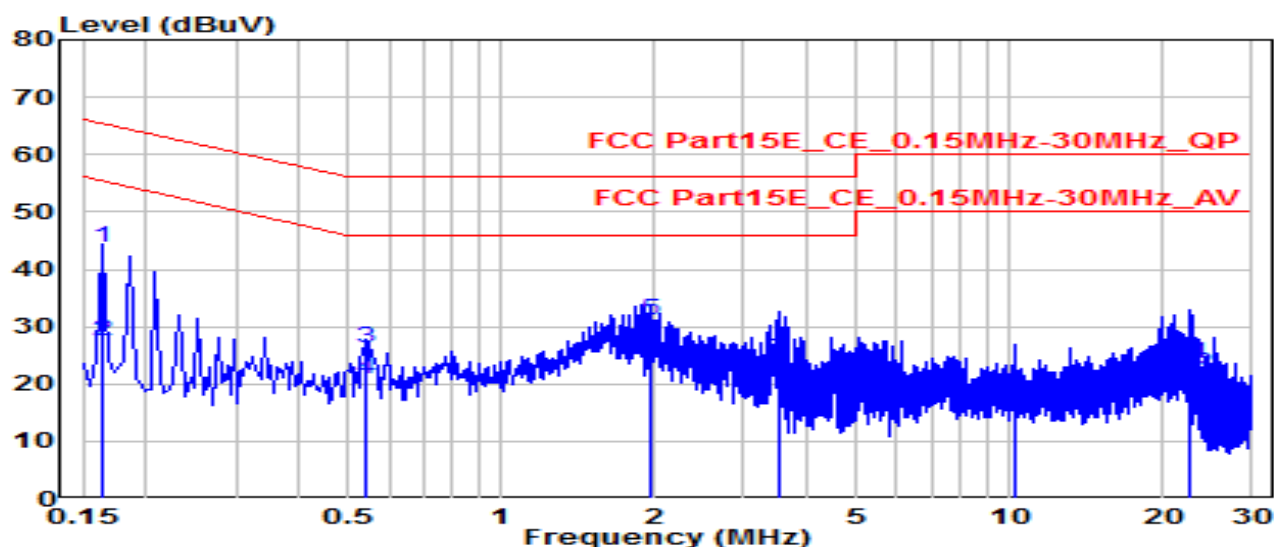


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.163	34.20	9.61	43.81	-21.47	65.28	QP
2		0.163	17.84	9.61	27.45	-27.84	55.28	Average
3		0.541	16.67	9.63	26.30	-29.70	56.00	QP
4		0.541	11.24	9.63	20.87	-25.13	46.00	Average
5	*	1.968	21.50	9.69	31.19	-24.81	56.00	QP
6	*	1.968	15.05	9.69	24.74	-21.26	46.00	Average
7		3.520	14.45	9.71	24.16	-31.84	56.00	QP
8		3.520	10.67	9.71	20.38	-25.62	46.00	Average
9		10.305	8.58	9.88	18.46	-41.54	60.00	QP
10		10.305	4.78	9.88	14.66	-35.34	50.00	Average
11		22.499	13.65	10.01	23.66	-36.34	60.00	QP
12		22.499	11.66	10.01	21.67	-28.33	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Handheld Data Terminal	Date of Test	2021-01-25
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /67%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH36_ANT 0+1	Test Voltage	AC 120V/60Hz

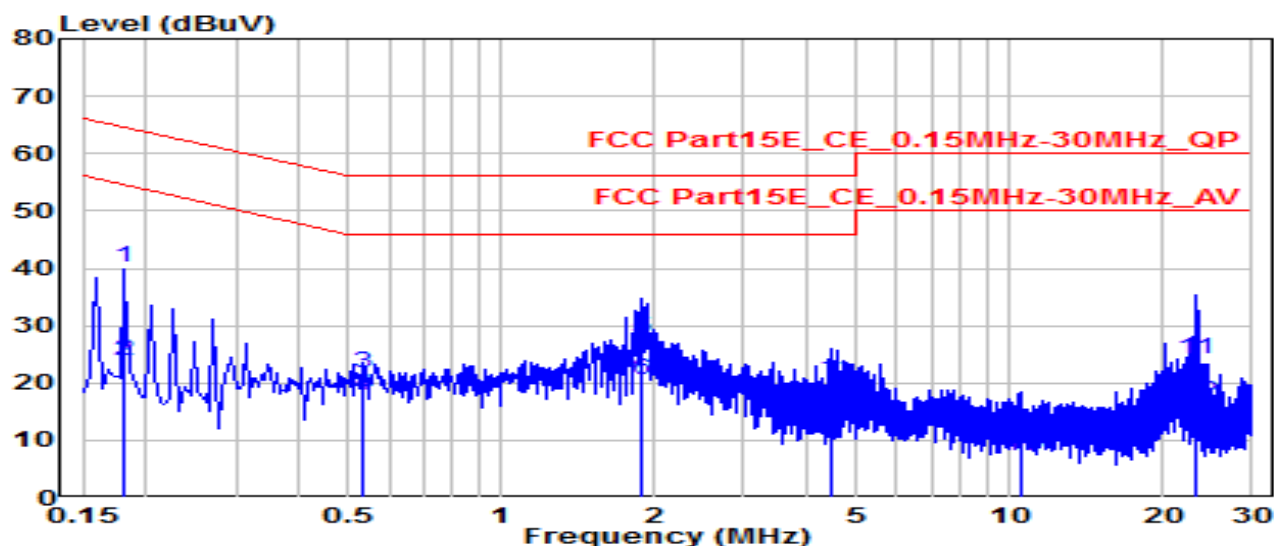


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.181	30.54	9.62	40.16	-24.26	64.42	QP
2	*	0.181	14.15	9.62	23.78	-30.64	54.42	Average
3		0.532	12.09	9.64	21.74	-34.26	56.00	QP
4		0.532	8.21	9.64	17.85	-28.15	46.00	Average
5		1.891	17.94	9.69	27.63	-28.37	56.00	QP
6		1.891	10.81	9.69	20.50	-25.50	46.00	Average
7		4.483	10.27	9.74	20.01	-35.99	56.00	QP
8		4.483	1.89	9.74	11.63	-34.37	46.00	Average
9		10.535	-1.11	9.90	8.79	-51.21	60.00	QP
10		10.535	-2.74	9.90	7.16	-42.84	50.00	Average
11		23.206	13.91	10.11	24.02	-35.98	60.00	QP
12		23.206	6.55	10.11	16.66	-33.34	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Handheld Data Terminal	Date of Test	2021-01-25
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /67%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH36_ANT 0+1	Test Voltage	AC 240V/60Hz

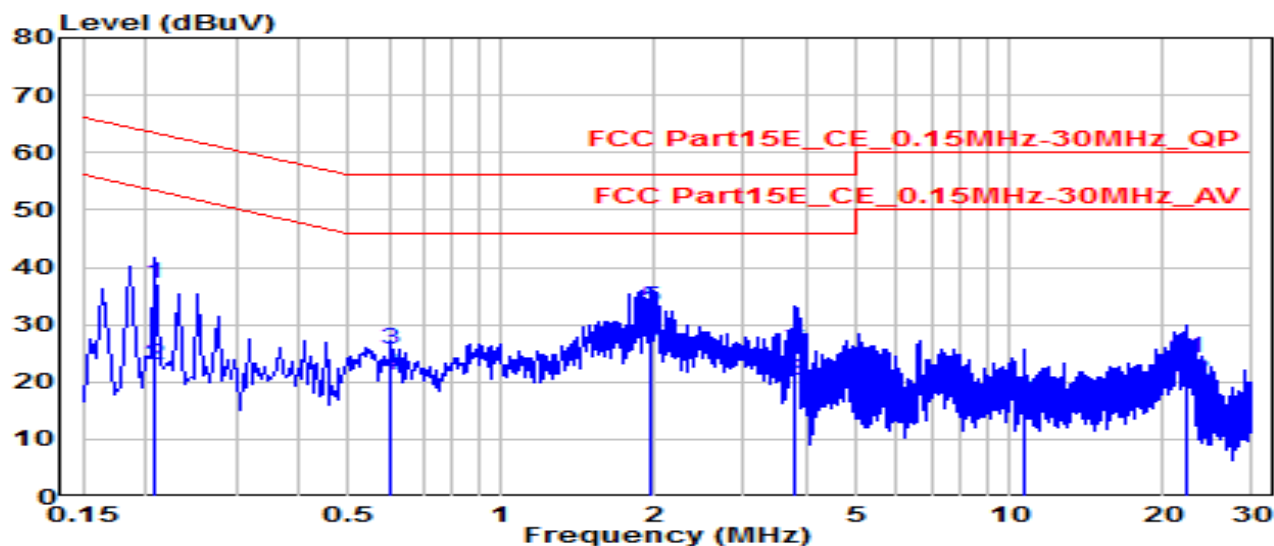


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.208	27.55	9.61	37.16	-26.11	63.27	QP
2		0.208	13.48	9.61	23.09	-30.18	53.27	Average
3		0.604	16.05	9.64	25.69	-30.31	56.00	QP
4		0.604	11.56	9.64	21.20	-24.80	46.00	Average
5	*	1.959	23.25	9.69	32.94	-23.06	56.00	QP
6	*	1.959	17.07	9.69	26.76	-19.24	46.00	Average
7		3.790	15.78	9.72	25.50	-30.50	56.00	QP
8		3.790	10.44	9.72	20.16	-25.84	46.00	Average
9		10.706	6.85	9.89	16.74	-43.26	60.00	QP
10		10.706	4.71	9.89	14.60	-35.40	50.00	Average
11		22.256	14.07	10.01	24.09	-35.91	60.00	QP
12		22.256	10.18	10.01	20.19	-29.81	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Handheld Data Terminal	Date of Test	2021-01-25
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /67%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20_TX_Band1_CH36_ANT 0+1	Test Voltage	AC 240V/60Hz

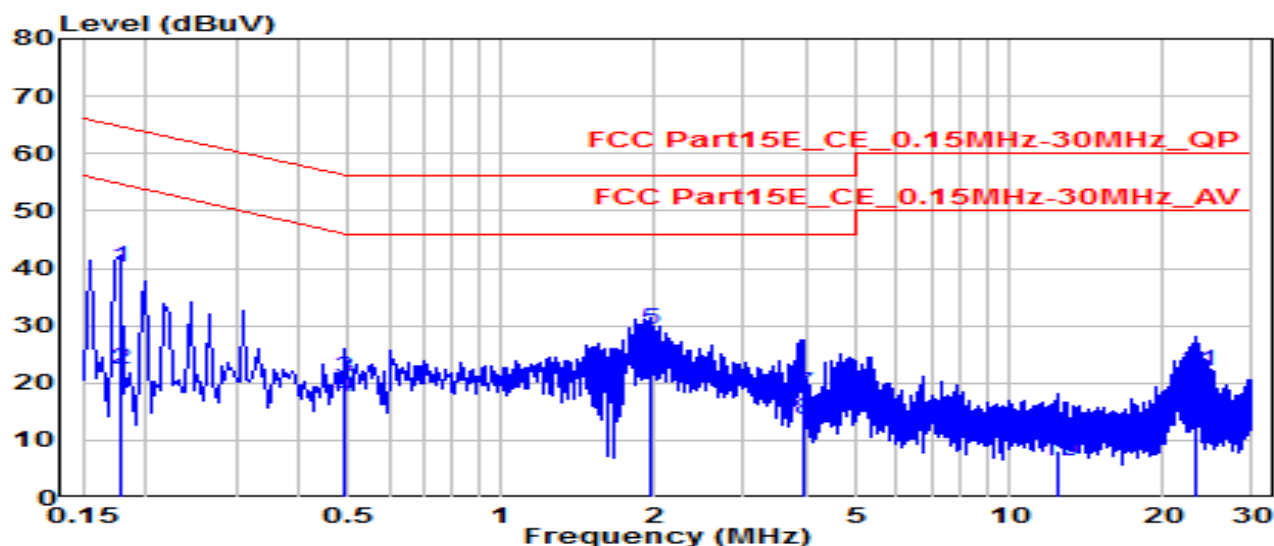

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.177	30.56	9.62	40.19	-24.44	64.63	QP
2		0.177	12.83	9.62	22.45	-32.17	54.63	Average
3		0.492	11.22	9.64	20.86	-35.28	56.13	QP
4		0.492	7.77	9.64	17.41	-28.72	46.13	Average
5	*	1.954	19.68	9.69	29.37	-26.63	56.00	QP
6	*	1.954	13.00	9.69	22.69	-23.31	46.00	Average
7		3.952	8.37	9.73	18.10	-37.90	56.00	QP
8		3.952	4.01	9.73	13.74	-32.26	46.00	Average
9		12.474	-1.71	9.93	8.22	-51.78	60.00	QP
10		12.474	-3.45	9.93	6.48	-43.52	50.00	Average
11		23.399	11.92	10.12	22.03	-37.97	60.00	QP
12		23.399	3.25	10.12	13.37	-36.63	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Handheld Data Terminal, Model Number: HT730** is in compliance with Part 15E of the FCC Rules.

_____ The End _____