

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5180MHz

Data: 123

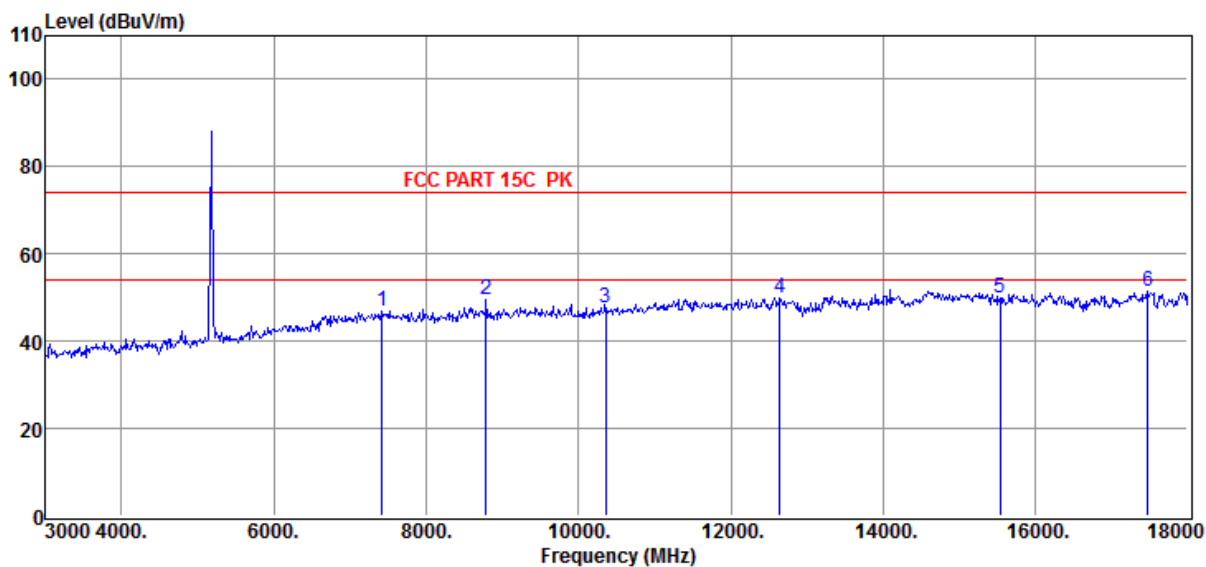

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7425.00	6.31	46.89	74.00	-27.11	153	180	Peak	VERTICAL
2	8790.00	6.67	49.65	74.00	-24.35	164	155	Peak	VERTICAL
3	10360.00	8.75	47.46	74.00	-26.54	188	190	Peak	VERTICAL
4	12645.00	9.85	49.85	74.00	-24.15	165	166	Peak	VERTICAL
5	15540.00	10.31	49.75	74.00	-24.25	174	164	Peak	VERTICAL
6	17475.00	15.60	51.40	74.00	-22.60	165	186	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5200MHz

Data: 124

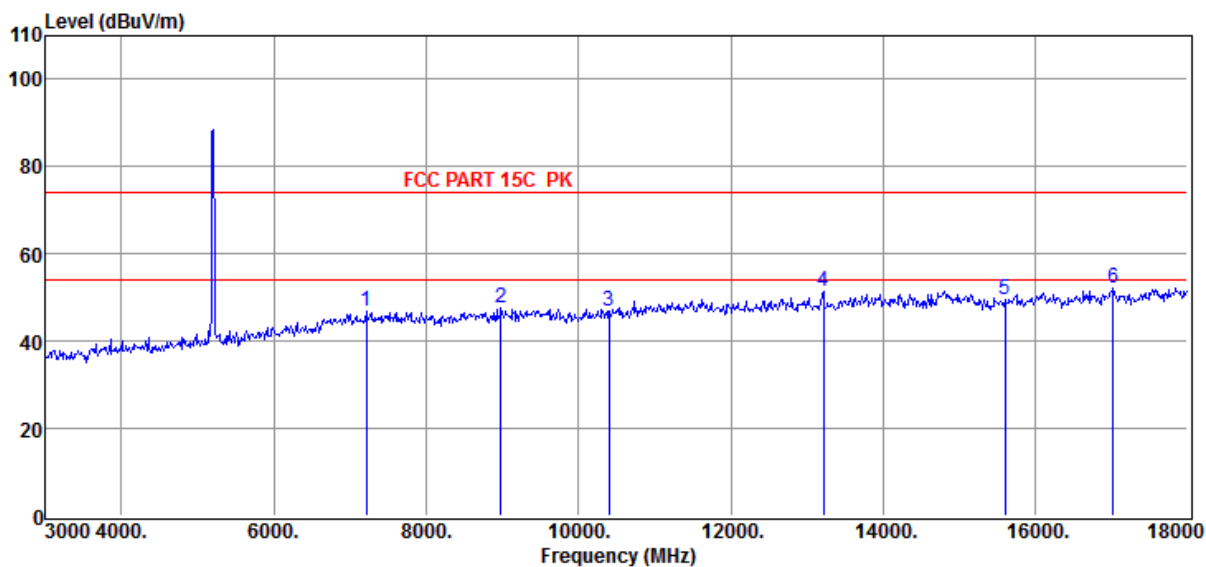

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7215.00	5.86	46.86	74.00	-27.14	167	161	Peak	VERTICAL
2	8985.00	7.07	47.65	74.00	-26.35	187	172	Peak	VERTICAL
3	10400.00	8.84	47.01	74.00	-26.99	183	163	Peak	VERTICAL
4	13215.00	10.35	51.28	74.00	-22.72	169	190	Peak	VERTICAL
5	15600.00	10.22	49.49	74.00	-24.51	171	175	Peak	VERTICAL
6	17025.00	16.14	52.13	74.00	-21.87	183	178	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5200MHZ

Data: 125

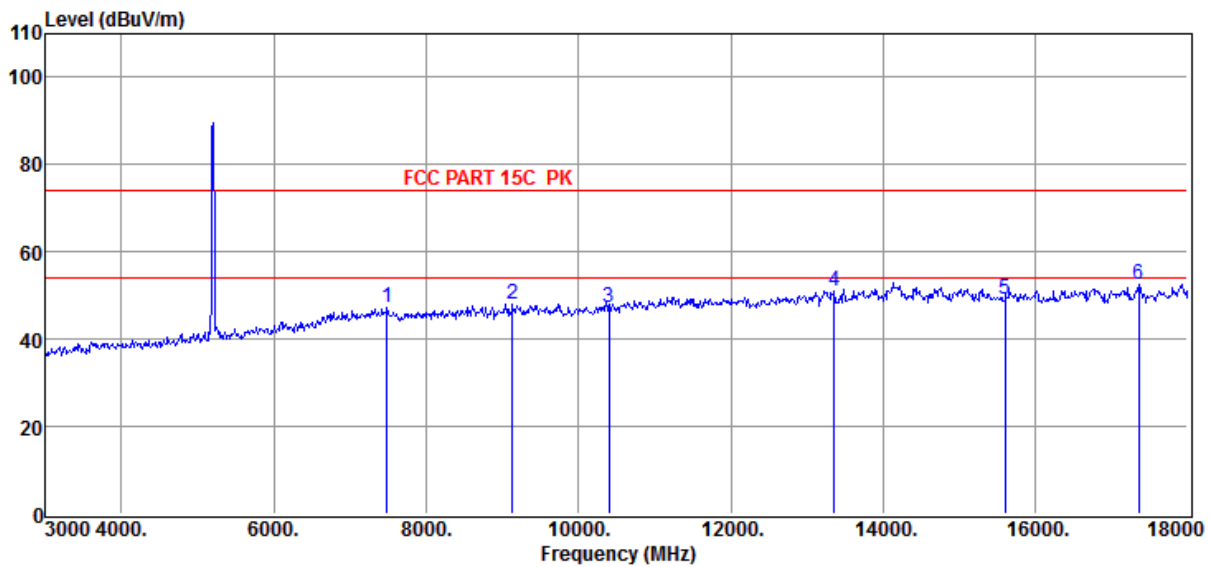

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7485.00	6.51	47.29	74.00	-26.71	183	161	Peak	HORIZONTAL
2	9135.00	7.13	48.07	74.00	-25.93	169	180	Peak	HORIZONTAL
3	10400.00	8.84	47.31	74.00	-26.69	152	175	Peak	HORIZONTAL
4	13365.00	10.84	50.95	74.00	-23.05	160	187	Peak	HORIZONTAL
5	15600.00	10.22	49.01	74.00	-24.99	174	164	Peak	HORIZONTAL
6	17355.00	15.70	52.46	74.00	-21.54	165	154	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5240MHz

Data: 126

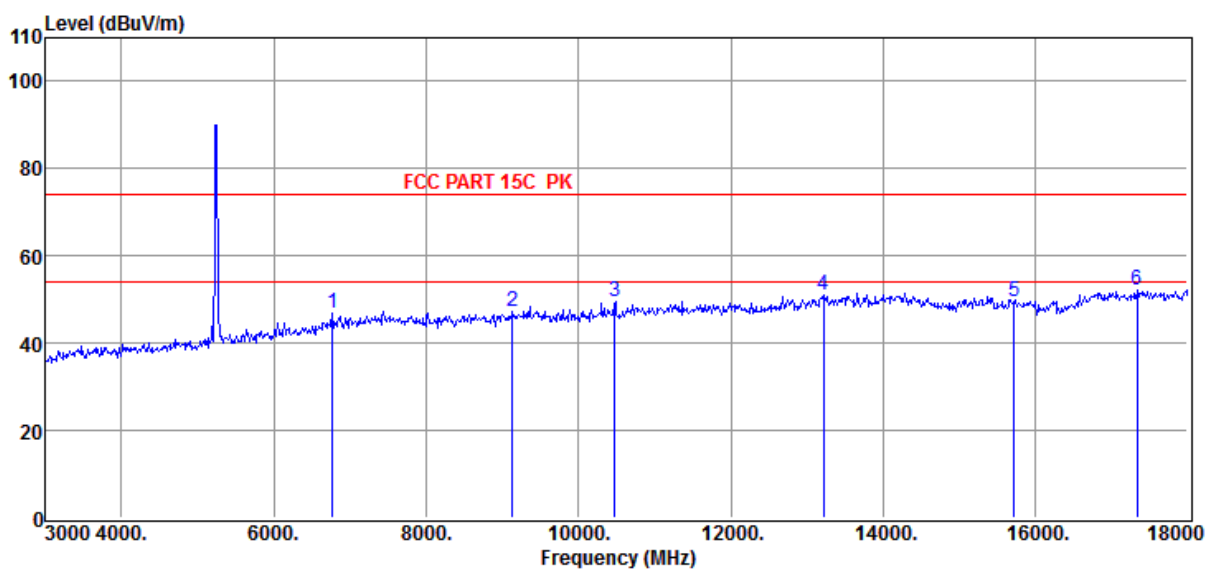

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6765.00	4.96	47.00	74.00	-27.00	167	150	Peak	HORIZONTAL
2	9135.00	7.13	47.07	74.00	-26.93	156	178	Peak	HORIZONTAL
3	10480.00	8.91	49.58	74.00	-24.42	181	184	Peak	HORIZONTAL
4	13215.00	10.35	50.93	74.00	-23.07	161	179	Peak	HORIZONTAL
5	15720.00	10.99	49.63	74.00	-24.37	166	175	Peak	HORIZONTAL
6	17340.00	15.74	52.00	74.00	-22.00	170	186	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5240MHz

Data: 127

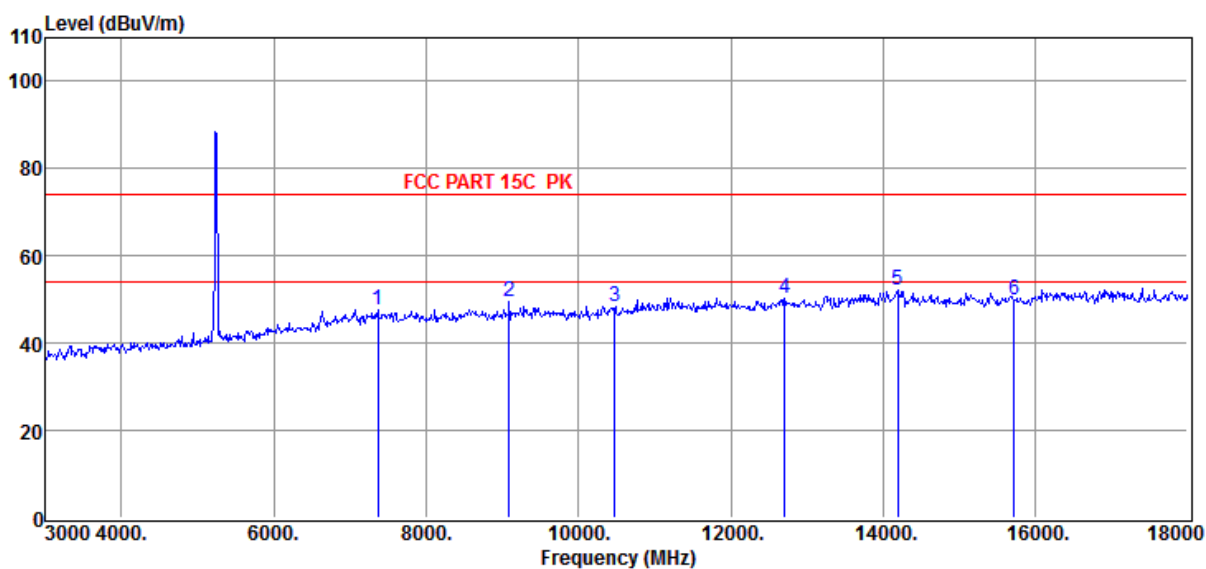

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	47.60	74.00	-26.40	152	150	Peak	VERTICAL
2	9090.00	7.06	49.45	74.00	-24.55	150	181	Peak	VERTICAL
3	10480.00	8.91	48.32	74.00	-25.68	151	174	Peak	VERTICAL
4	12705.00	9.87	50.17	74.00	-23.83	162	184	Peak	VERTICAL
5	14190.00	13.97	52.35	74.00	-21.65	172	170	Peak	VERTICAL
6	15720.00	10.99	49.75	74.00	-24.25	173	158	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5260MHz

Data: 128

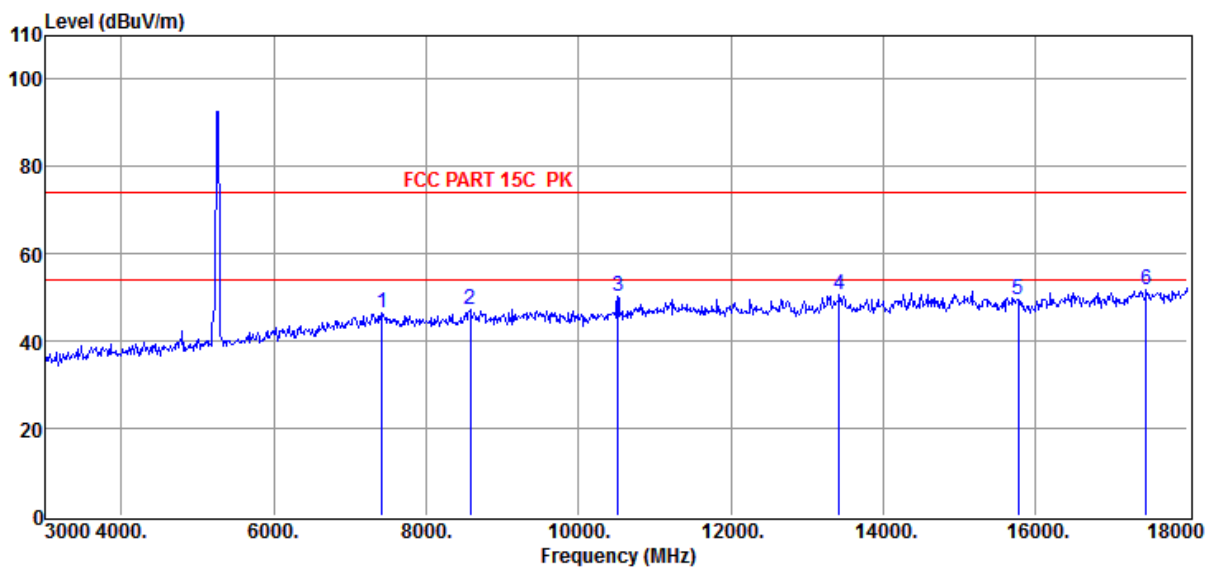

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7425.00	6.31	46.42	74.00	-27.58	176	155	Peak	VERTICAL
2	8580.00	6.48	47.44	74.00	-26.56	163	173	Peak	VERTICAL
3	10520.00	8.98	50.35	74.00	-23.65	169	179	Peak	VERTICAL
4	13425.00	10.92	50.65	74.00	-23.35	175	160	Peak	VERTICAL
5	15780.00	10.50	49.58	74.00	-24.42	150	177	Peak	VERTICAL
6	17460.00	15.59	51.75	74.00	-22.25	168	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5260MHz

Data: 129

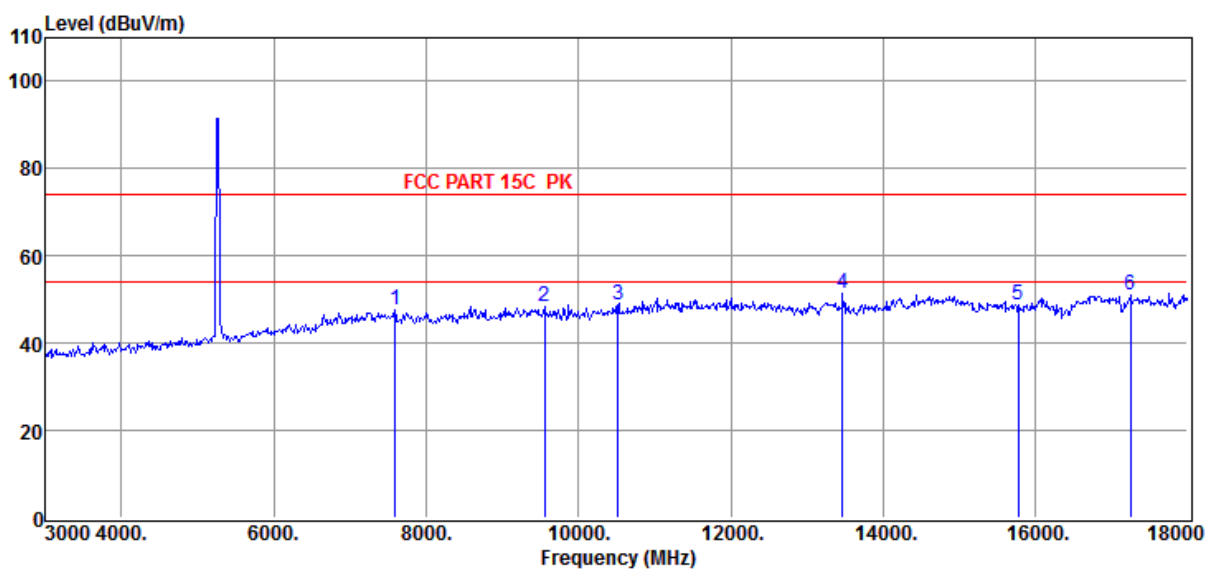

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	47.48	74.00	-26.52	186	152	Peak	HORIZONTAL
2	9555.00	7.95	48.47	74.00	-25.53	179	166	Peak	HORIZONTAL
3	10520.00	8.98	48.61	74.00	-25.39	158	189	Peak	HORIZONTAL
4	13470.00	11.18	51.39	74.00	-22.61	174	183	Peak	HORIZONTAL
5	15780.00	10.50	48.80	74.00	-25.20	173	170	Peak	HORIZONTAL
6	17250.00	15.69	50.85	74.00	-23.15	190	165	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5280MHz

Data: 130

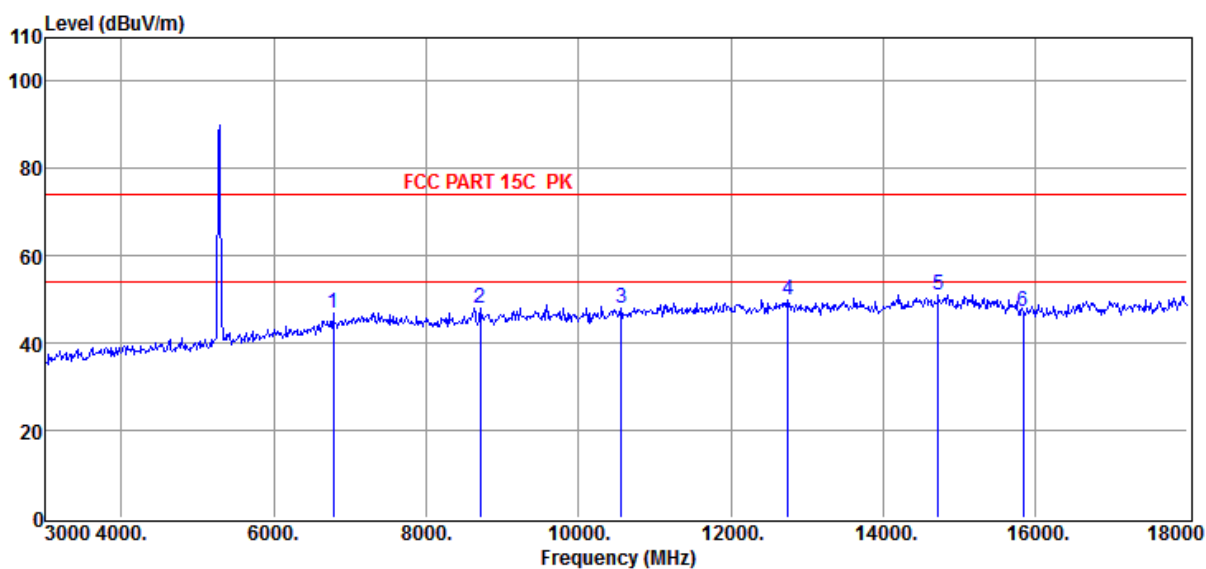

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6780.00	5.09	47.04	74.00	-26.96	157	164	Peak	HORIZONTAL
2	8715.00	6.66	48.06	74.00	-25.94	185	159	Peak	HORIZONTAL
3	10560.00	9.06	48.07	74.00	-25.93	189	156	Peak	HORIZONTAL
4	12750.00	9.74	49.96	74.00	-24.04	181	168	Peak	HORIZONTAL
5	14730.00	12.62	51.11	74.00	-22.89	169	180	Peak	HORIZONTAL
6	15840.00	10.49	47.18	74.00	-26.82	156	153	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5280MHz

Data: 131

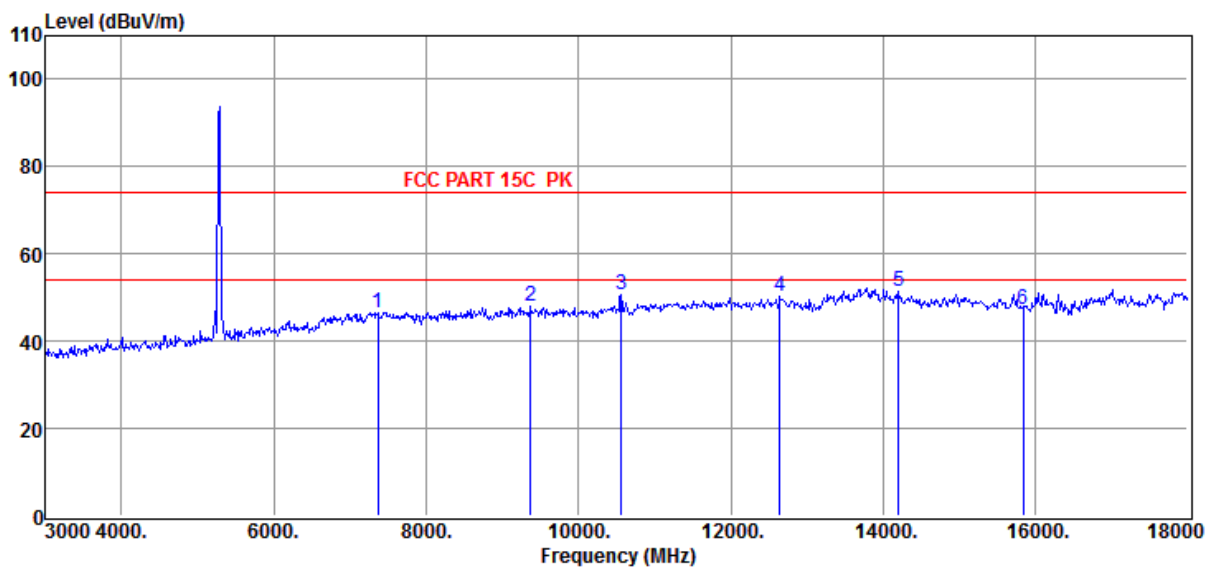

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	46.61	74.00	-27.39	184	153	Peak	VERTICAL
2	9375.00	8.06	47.90	74.00	-26.10	181	172	Peak	VERTICAL
3	10560.00	9.06	50.70	74.00	-23.30	165	172	Peak	VERTICAL
4	12645.00	9.85	50.15	74.00	-23.85	185	151	Peak	VERTICAL
5	14205.00	14.01	51.29	74.00	-22.71	162	156	Peak	VERTICAL
6	15840.00	10.49	47.29	74.00	-26.71	173	184	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5320MHz

Data: 132

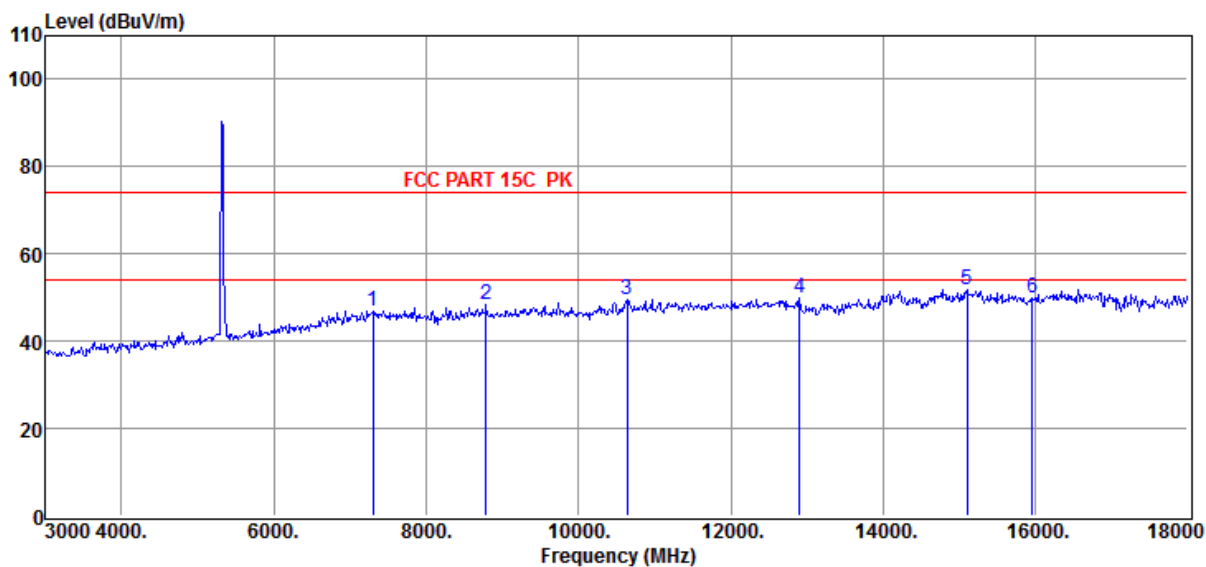

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7305.00	6.30	46.99	74.00	-27.01	166	168	Peak	VERTICAL
2	8790.00	6.67	48.34	74.00	-25.66	180	172	Peak	VERTICAL
3	10640.00	9.14	49.67	74.00	-24.33	172	155	Peak	VERTICAL
4	12900.00	10.15	49.89	74.00	-24.11	189	155	Peak	VERTICAL
5	15105.00	12.31	51.84	74.00	-22.16	175	169	Peak	VERTICAL
6	15960.00	10.72	49.83	74.00	-24.17	181	160	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5320MHz

Data: 133

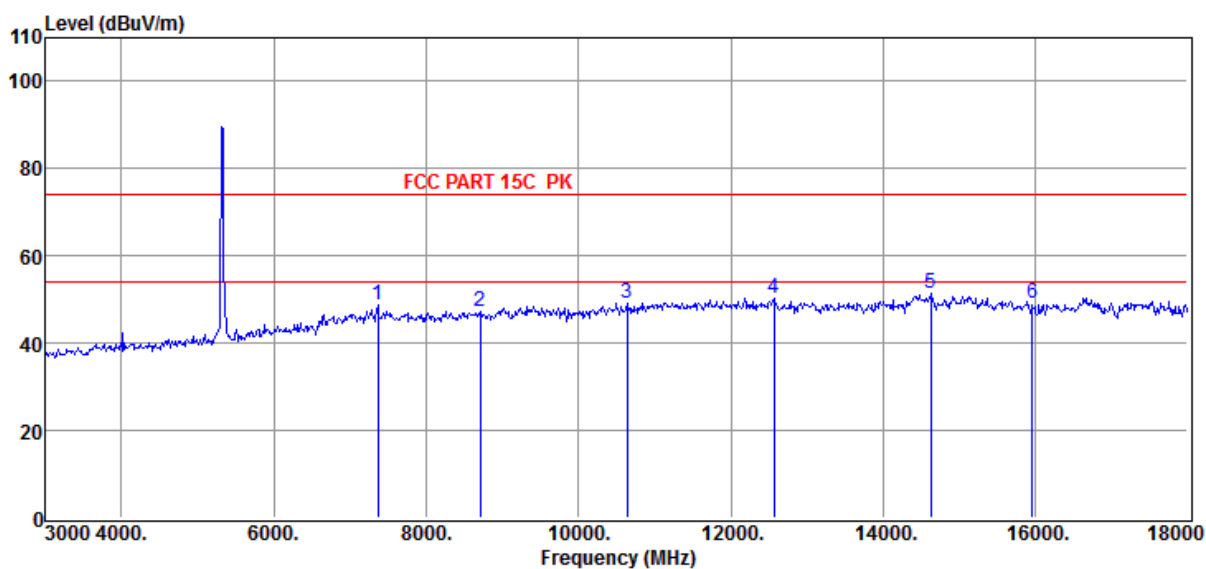

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	48.66	74.00	-25.34	176	190	Peak	HORIZONTAL
2	8715.00	6.66	47.23	74.00	-26.77	163	173	Peak	HORIZONTAL
3	10640.00	9.14	49.27	74.00	-24.73	179	181	Peak	HORIZONTAL
4	12570.00	9.62	50.30	74.00	-23.70	184	152	Peak	HORIZONTAL
5	14625.00	13.30	51.49	74.00	-22.51	156	156	Peak	HORIZONTAL
6	15960.00	10.72	49.32	74.00	-24.68	162	185	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5500MHZ

Data: 134

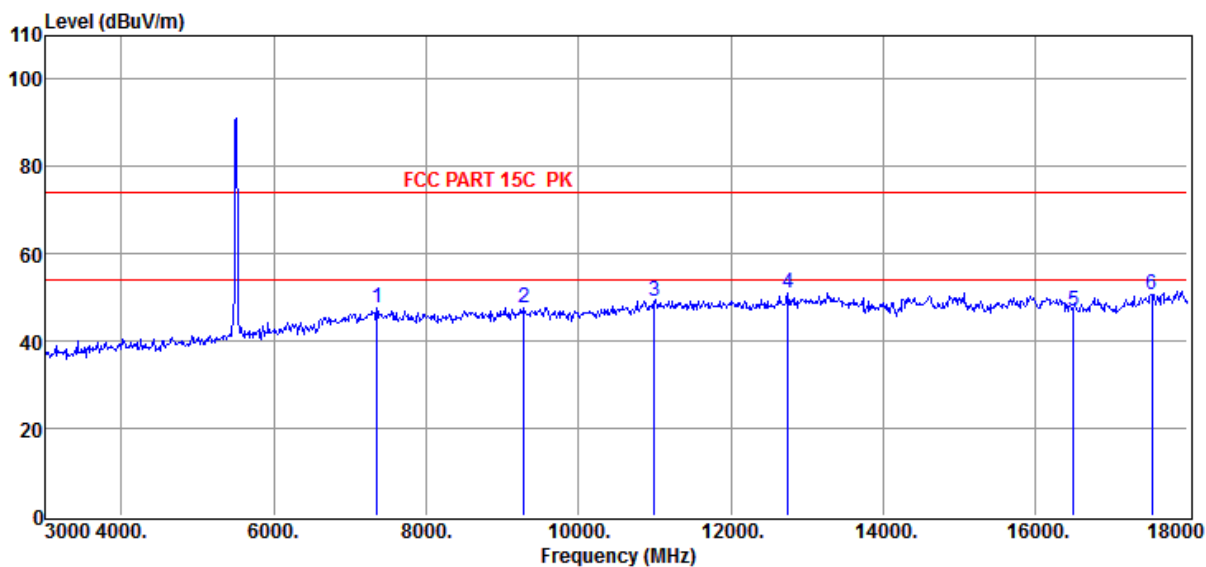

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7350.00	6.57	47.48	74.00	-26.52	184	175	Peak	HORIZONTAL
2	9285.00	7.61	47.55	74.00	-26.45	186	173	Peak	HORIZONTAL
3	11000.00	9.85	49.22	74.00	-24.78	190	161	Peak	HORIZONTAL
4	12750.00	9.74	51.06	74.00	-22.94	159	180	Peak	HORIZONTAL
5	16500.00	13.06	47.03	74.00	-26.97	161	188	Peak	HORIZONTAL
6	17535.00	15.54	50.74	74.00	-23.26	167	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5500MHZ

Data: 135

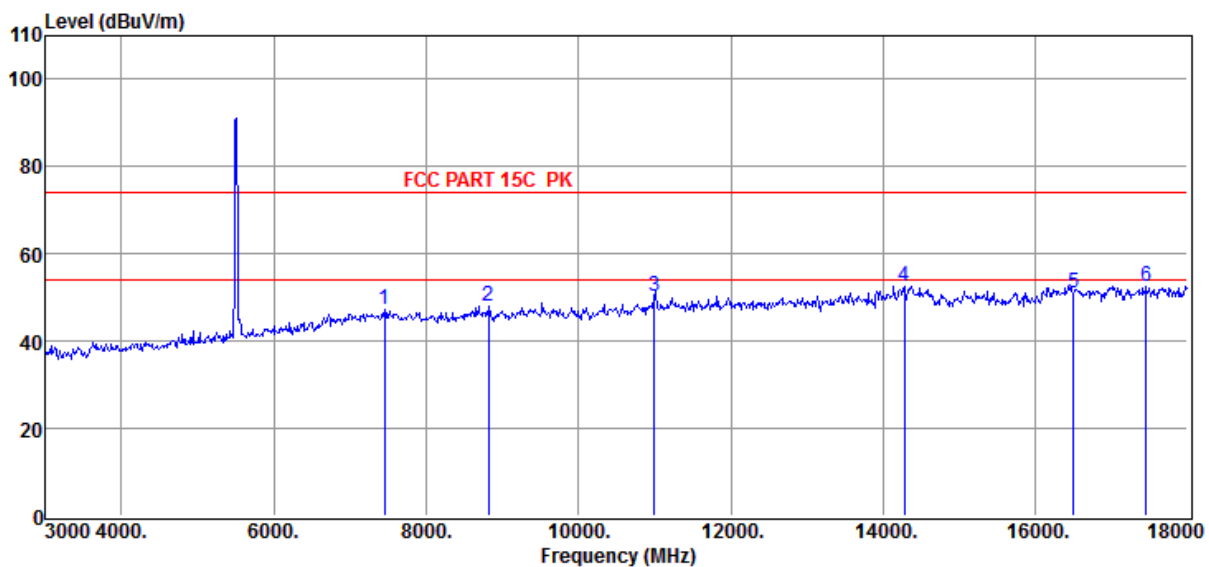

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7455.00	6.51	47.25	74.00	-26.75	166	187	Peak	VERTICAL
2	8820.00	6.63	48.12	74.00	-25.88	189	164	Peak	VERTICAL
3	11000.00	9.85	50.16	74.00	-23.84	186	152	Peak	VERTICAL
4	14280.00	13.10	52.70	74.00	-21.30	161	167	Peak	VERTICAL
5	16500.00	13.06	51.17	74.00	-22.83	165	177	Peak	VERTICAL
6	17460.00	15.59	52.70	74.00	-21.30	159	169	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5580MHz

Data: 136

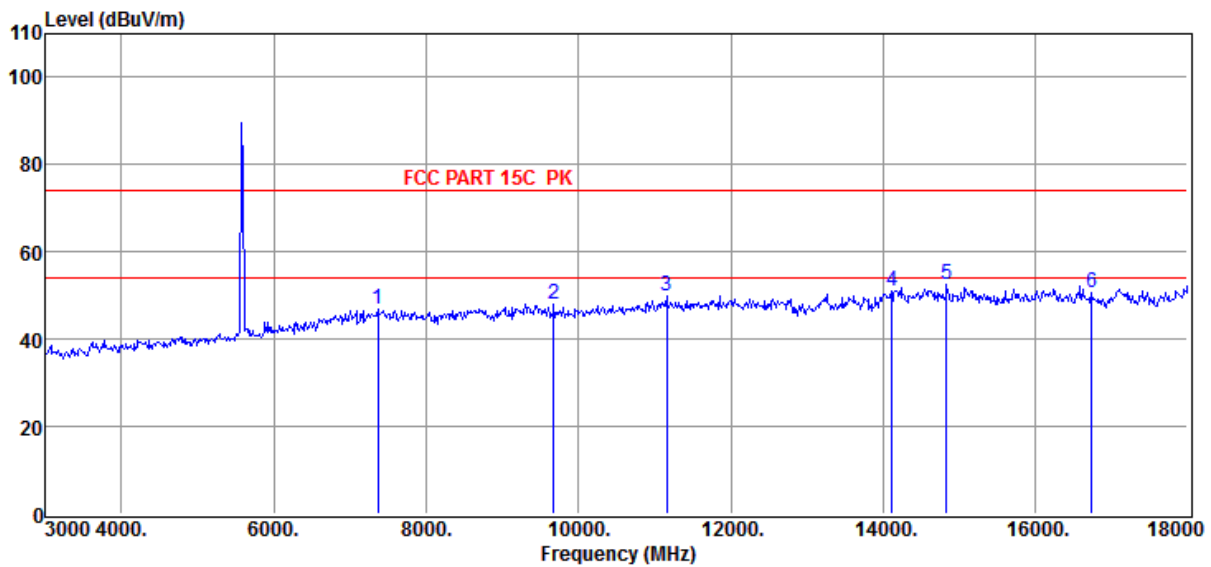

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	46.91	74.00	-27.09	185	178	Peak	VERTICAL
2	9675.00	8.07	48.14	74.00	-25.86	186	176	Peak	VERTICAL
3	11160.00	10.24	49.93	74.00	-24.07	170	188	Peak	VERTICAL
4	14115.00	13.22	51.08	74.00	-22.92	183	169	Peak	VERTICAL
5	14835.00	12.62	52.66	74.00	-21.34	172	172	Peak	VERTICAL
6	16740.00	14.70	50.48	74.00	-23.52	173	186	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5580MHz

Data: 137

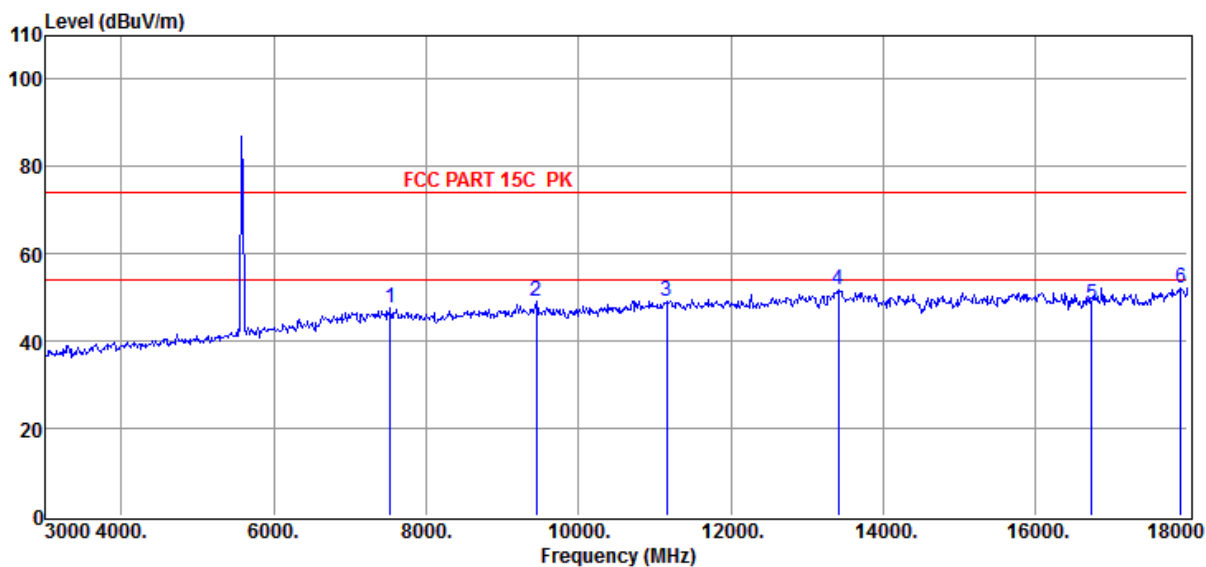

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7530.00	6.59	47.49	74.00	-26.51	151	185	Peak	HORIZONTAL
2	9450.00	7.98	48.95	74.00	-25.05	181	174	Peak	HORIZONTAL
3	11160.00	10.24	49.07	74.00	-24.93	161	181	Peak	HORIZONTAL
4	13410.00	10.85	51.86	74.00	-22.14	179	181	Peak	HORIZONTAL
5	16740.00	14.70	48.46	74.00	-25.54	175	177	Peak	HORIZONTAL
6	17910.00	15.19	52.34	74.00	-21.66	186	159	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5700MHZ

Data: 138

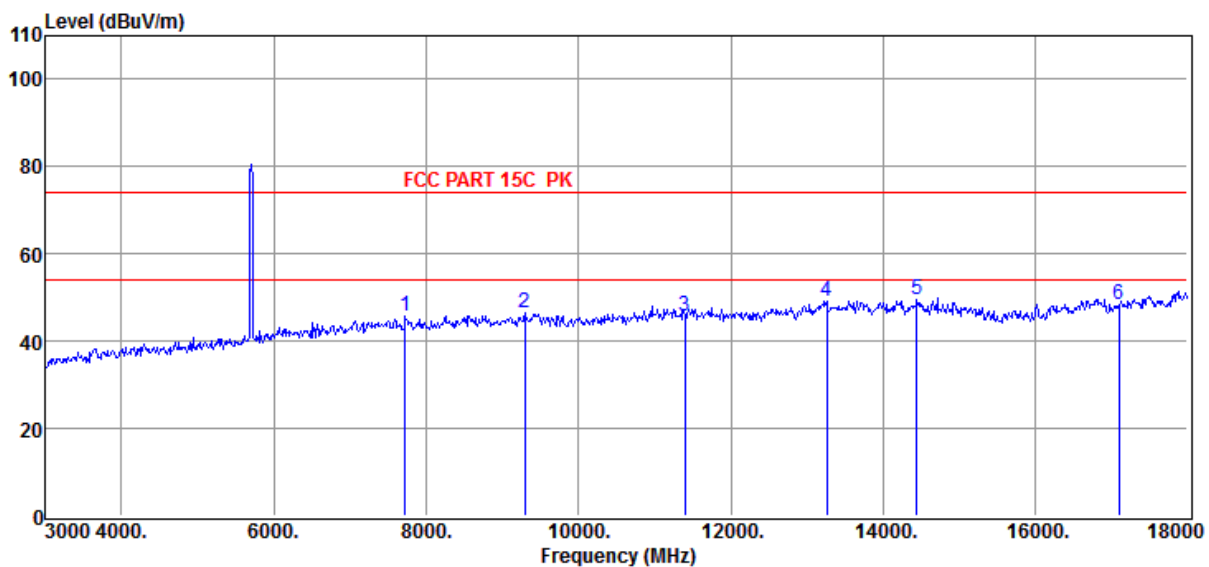

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7725.00	6.03	45.63	74.00	-28.37	172	178	Peak	HORIZONTAL
2	9300.00	7.67	46.48	74.00	-27.52	151	176	Peak	HORIZONTAL
3	11400.00	10.06	45.86	74.00	-28.14	155	179	Peak	HORIZONTAL
4	13260.00	10.66	49.23	74.00	-24.77	166	160	Peak	HORIZONTAL
5	14445.00	13.39	49.69	74.00	-24.31	187	185	Peak	HORIZONTAL
6	17100.00	15.56	48.20	74.00	-25.80	168	187	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5700MHZ

Data: 139

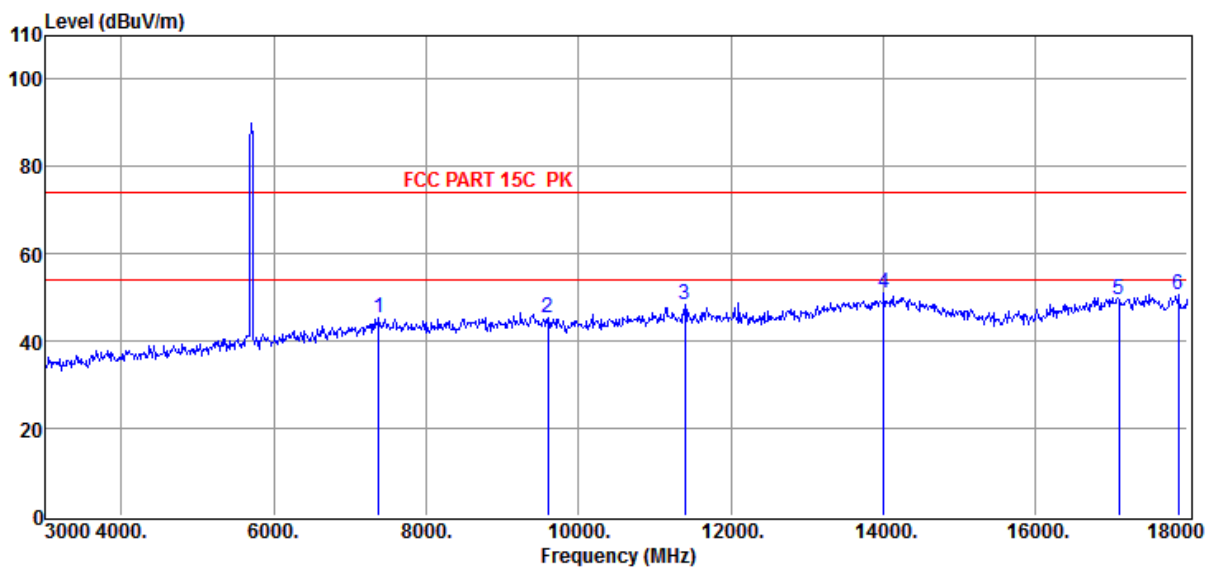

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7380.00	6.30	45.41	74.00	-28.59	182	164	Peak	VERTICAL
2	9600.00	8.09	45.42	74.00	-28.58	176	178	Peak	VERTICAL
3	11400.00	10.06	48.39	74.00	-25.61	169	151	Peak	VERTICAL
4	14010.00	13.01	51.05	74.00	-22.95	166	153	Peak	VERTICAL
5	17100.00	15.56	49.66	74.00	-24.34	173	181	Peak	VERTICAL
6	17880.00	15.28	50.81	74.00	-23.19	161	165	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5745MHz

Data: 140

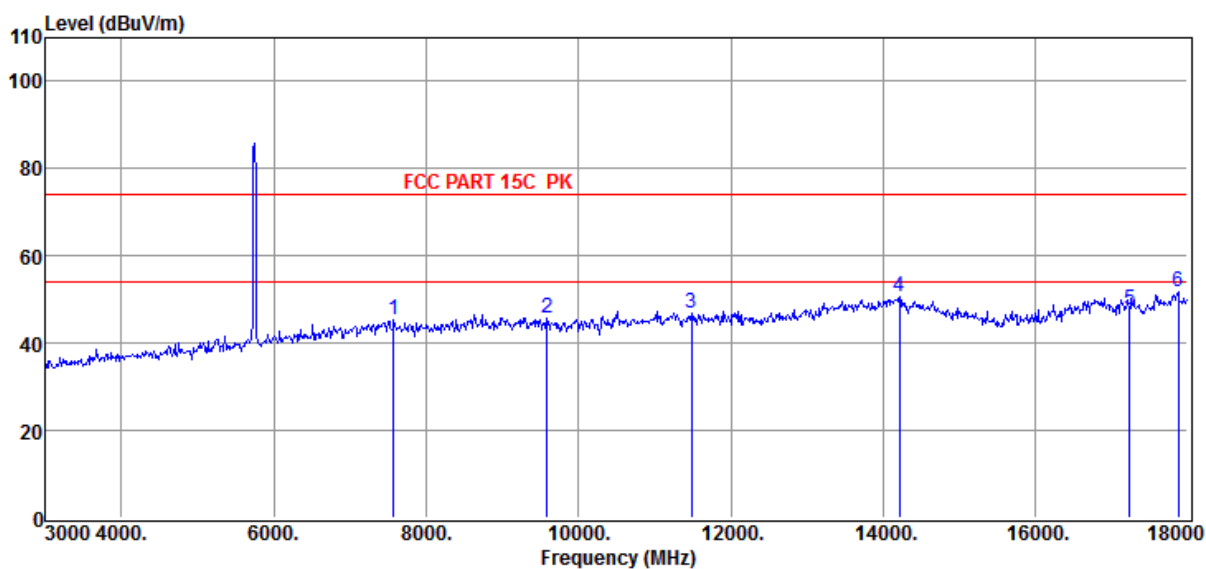

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	45.26	74.00	-28.74	157	178	Peak	VERTICAL
2	9585.00	8.04	45.72	74.00	-28.28	166	170	Peak	VERTICAL
3	11490.00	10.09	47.01	74.00	-26.99	154	150	Peak	VERTICAL
4	14220.00	13.82	50.79	74.00	-23.21	157	164	Peak	VERTICAL
5	17235.00	15.65	47.61	74.00	-26.39	189	168	Peak	VERTICAL
6	17880.00	15.28	51.61	74.00	-22.39	175	152	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5745MHz

Data: 141

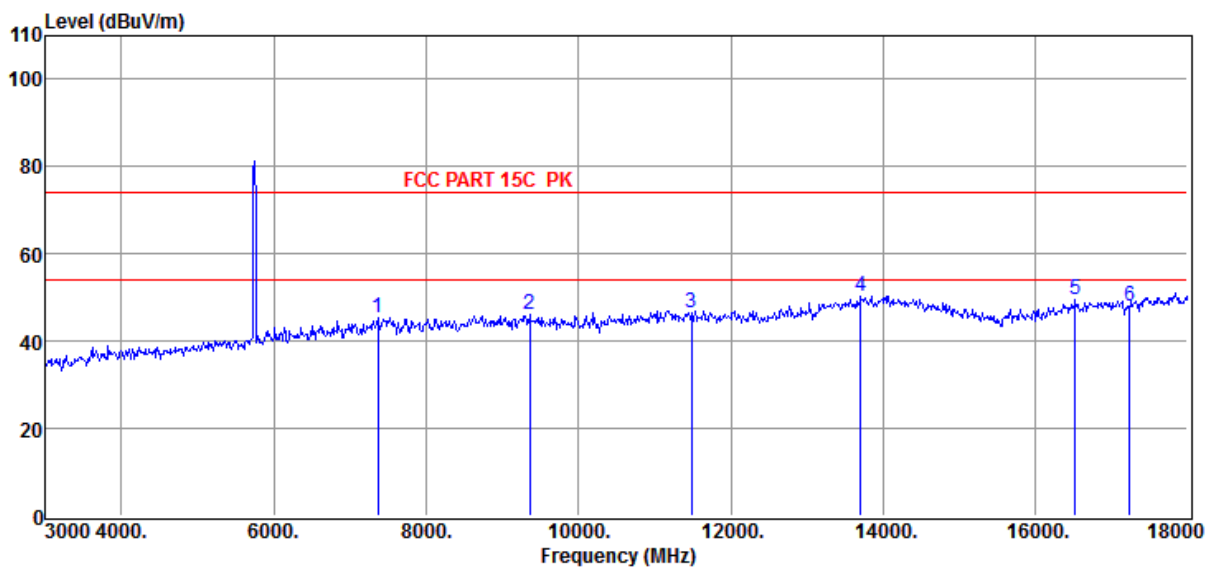

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	45.41	74.00	-28.59	156	154	Peak	HORIZONTAL
2	9360.00	7.99	45.98	74.00	-28.02	182	183	Peak	HORIZONTAL
3	11490.00	10.09	46.42	74.00	-27.58	175	184	Peak	HORIZONTAL
4	13710.00	11.91	50.11	74.00	-23.89	169	162	Peak	HORIZONTAL
5	16530.00	13.34	49.40	74.00	-24.60	180	188	Peak	HORIZONTAL
6	17235.00	15.65	48.04	74.00	-25.96	161	176	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5785MHz

Data: 142

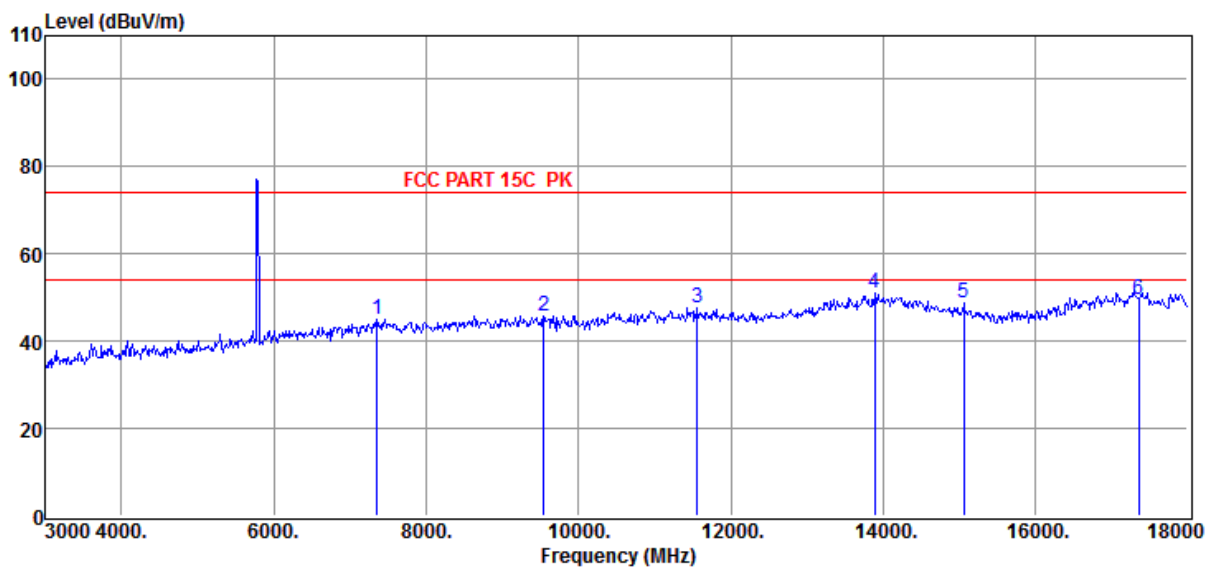

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7350.00	6.57	45.07	74.00	-28.93	182	157	Peak	HORIZONTAL
2	9540.00	7.90	45.90	74.00	-28.10	162	166	Peak	HORIZONTAL
3	11565.00	10.07	47.44	74.00	-26.56	152	155	Peak	HORIZONTAL
4	13890.00	12.52	51.18	74.00	-22.82	169	185	Peak	HORIZONTAL
5	15060.00	12.06	48.64	74.00	-25.36	158	166	Peak	HORIZONTAL
6	17355.00	15.70	49.40	74.00	-24.60	180	163	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5785MHz

Data: 143

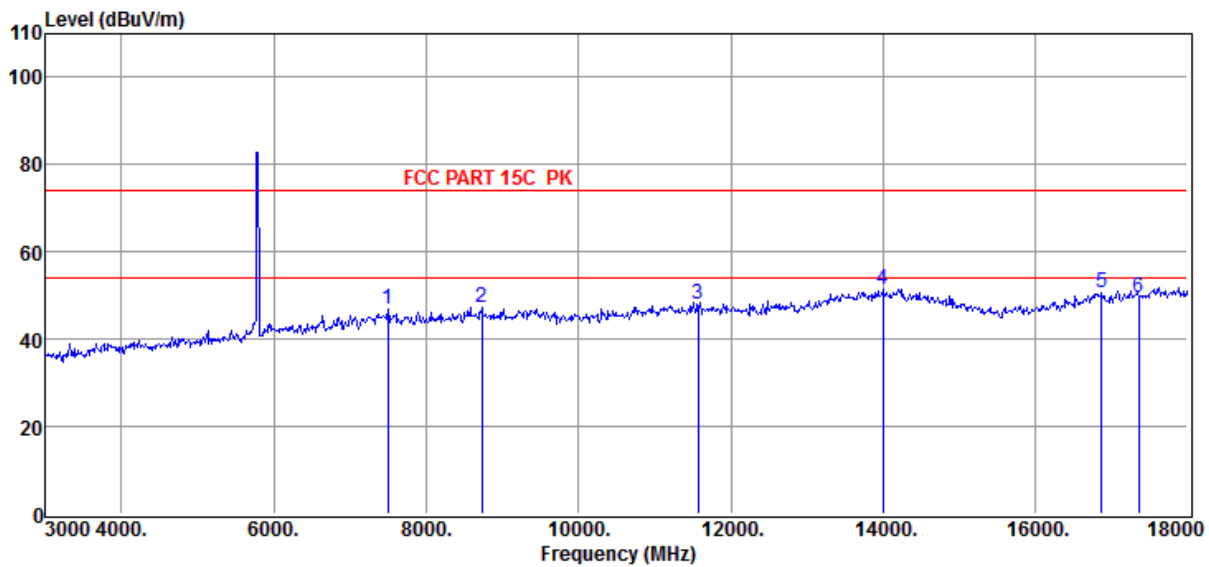

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7500.00	6.50	46.77	74.00	-27.23	180	160	Peak	VERTICAL
2	8730.00	6.66	47.17	74.00	-26.83	154	178	Peak	VERTICAL
3	11570.00	10.07	47.84	74.00	-26.16	160	185	Peak	VERTICAL
4	13995.00	12.98	51.58	74.00	-22.42	153	151	Peak	VERTICAL
5	16875.00	15.02	50.61	74.00	-23.39	188	185	Peak	VERTICAL
6	17355.00	15.70	49.47	74.00	-24.53	179	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5825MHZ

Data: 144

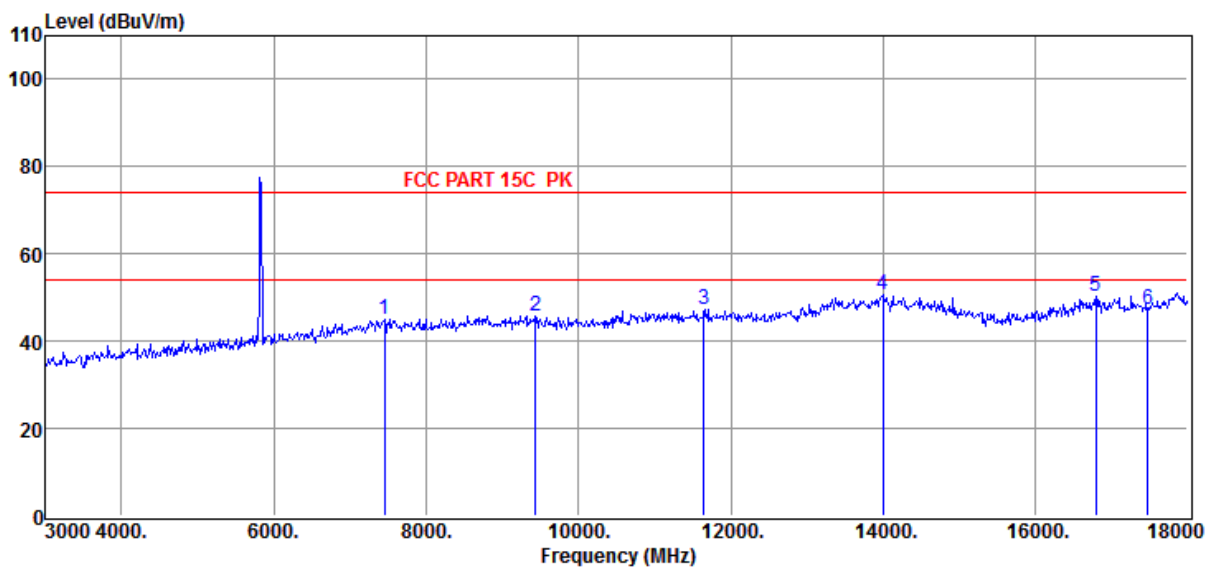

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7455.00	6.51	44.97	74.00	-29.03	151	181	Peak	VERTICAL
2	9435.00	8.05	45.76	74.00	-28.24	180	184	Peak	VERTICAL
3	11650.00	10.05	47.14	74.00	-26.86	175	166	Peak	VERTICAL
4	13995.00	12.98	50.52	74.00	-23.48	186	189	Peak	VERTICAL
5	16800.00	15.44	50.33	74.00	-23.67	171	169	Peak	VERTICAL
6	17475.00	15.60	47.32	74.00	-26.68	167	164	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5825MHZ

Data: 145

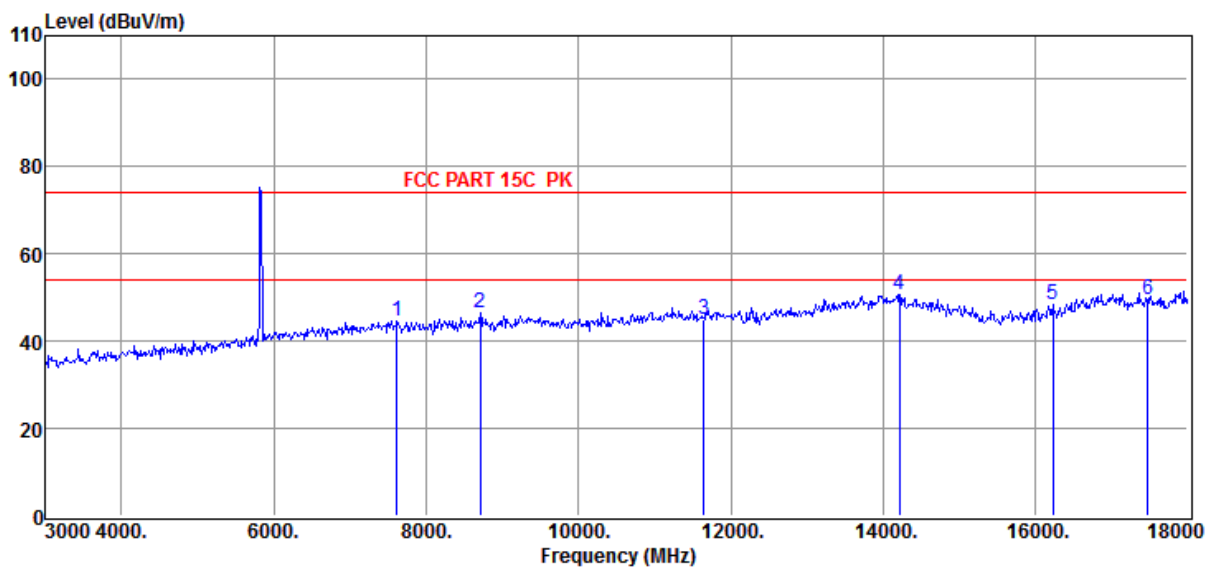

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7620.00	6.15	44.60	74.00	-29.40	177	160	Peak	HORIZONTAL
2	8715.00	6.66	46.32	74.00	-27.68	165	159	Peak	HORIZONTAL
3	11650.00	10.05	44.93	74.00	-29.07	167	189	Peak	HORIZONTAL
4	14220.00	13.82	50.49	74.00	-23.51	182	164	Peak	HORIZONTAL
5	16230.00	11.51	48.42	74.00	-25.58	164	165	Peak	HORIZONTAL
6	17475.00	15.60	49.34	74.00	-24.66	171	184	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 146

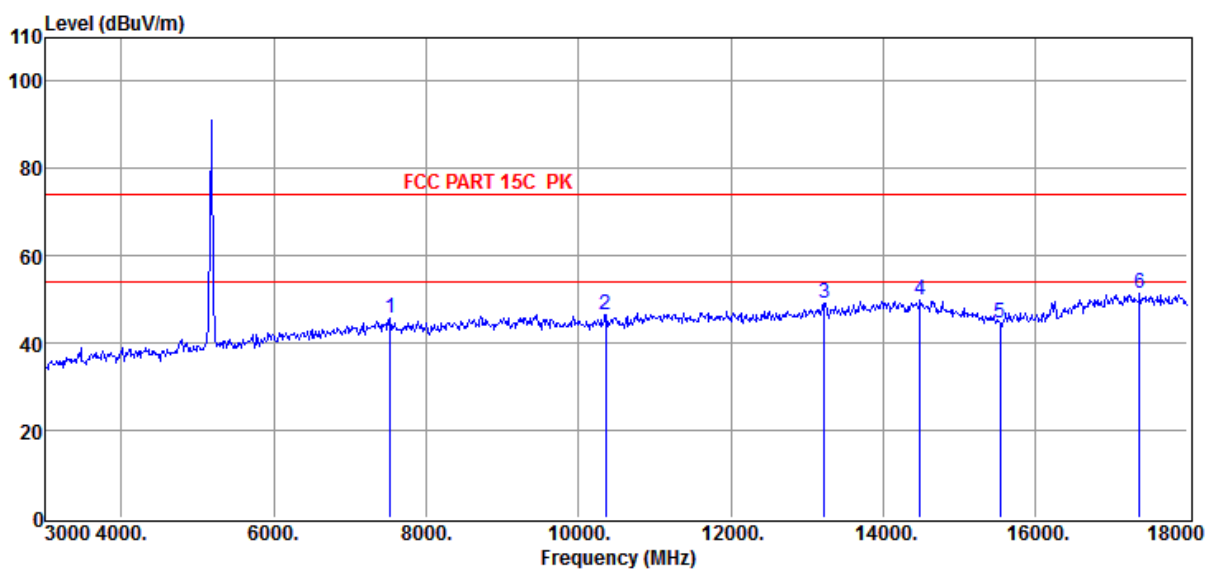

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7530.00	6.59	45.69	74.00	-28.31	189	157	Peak	VERTICAL
2	10360.00	8.75	46.38	74.00	-27.62	183	168	Peak	VERTICAL
3	13230.00	10.44	49.20	74.00	-24.80	151	173	Peak	VERTICAL
4	14490.00	12.93	49.71	74.00	-24.29	179	190	Peak	VERTICAL
5	15540.00	10.31	44.66	74.00	-29.34	174	152	Peak	VERTICAL
6	17370.00	15.66	51.33	74.00	-22.67	179	181	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 147

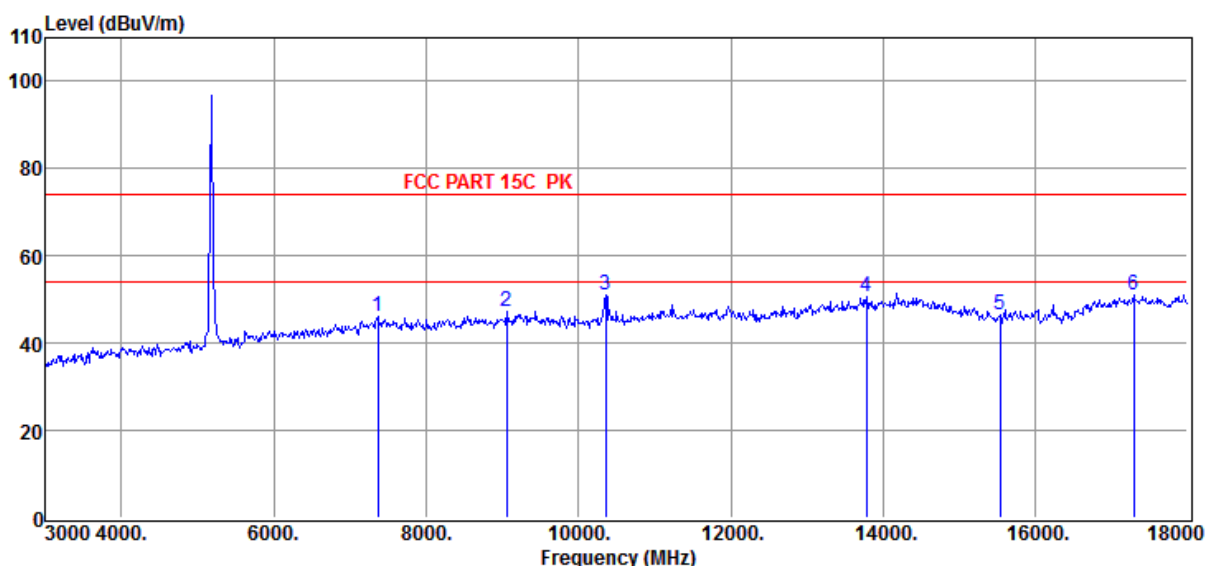

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	46.01	74.00	-27.99	185	173	Peak	HORIZONTAL
2	9060.00	7.11	47.31	74.00	-26.69	151	158	Peak	HORIZONTAL
3	10360.00	8.75	51.18	74.00	-22.82	160	178	Peak	HORIZONTAL
4	13785.00	11.99	50.60	74.00	-23.40	160	159	Peak	HORIZONTAL
5	15540.00	10.31	46.61	74.00	-27.39	182	188	Peak	HORIZONTAL
6	17295.00	15.81	51.21	74.00	-22.79	163	162	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5200MHz

Data: 148

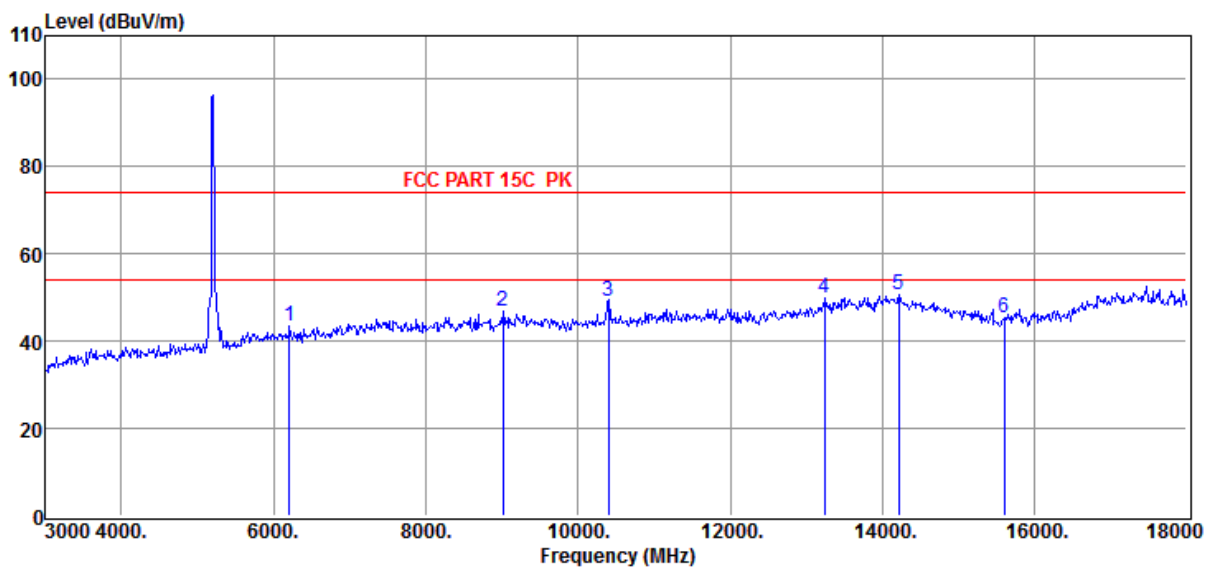

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6210.00	3.58	43.38	74.00	-30.62	166	158	Peak	HORIZONTAL
2	9015.00	7.16	46.88	74.00	-27.12	168	158	Peak	HORIZONTAL
3	10400.00	8.84	49.25	74.00	-24.75	178	179	Peak	HORIZONTAL
4	13245.00	10.55	49.88	74.00	-24.12	162	172	Peak	HORIZONTAL
5	14220.00	13.82	50.57	74.00	-23.43	188	169	Peak	HORIZONTAL
6	15600.00	10.22	45.38	74.00	-28.62	160	150	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5200MHz

Data: 149

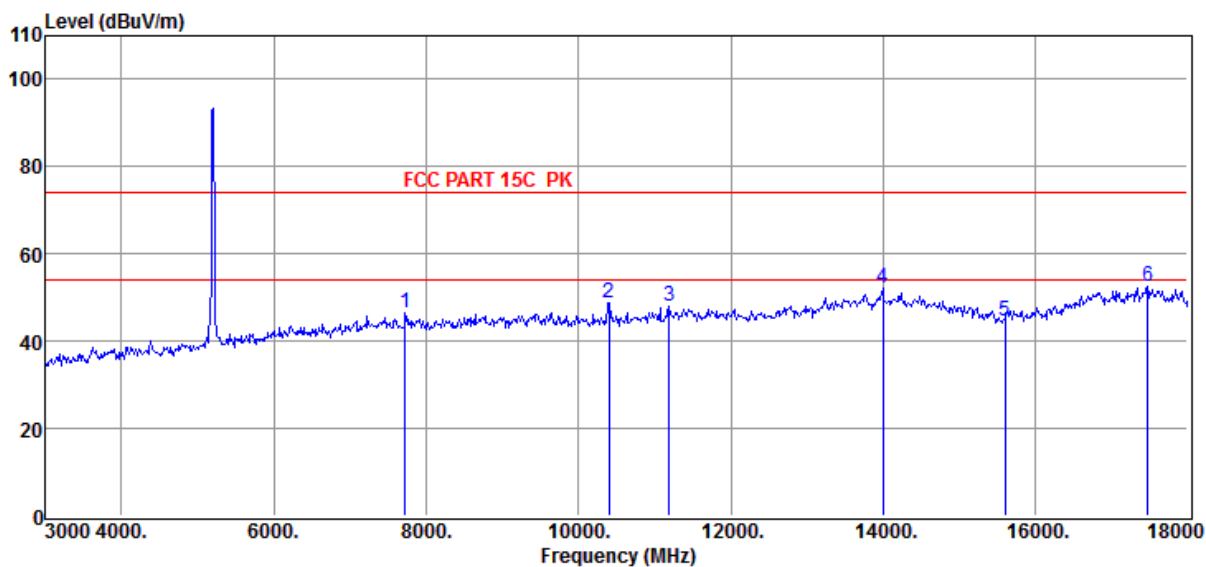

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7725.00	6.03	46.49	74.00	-27.51	187	170	Peak	VERTICAL
2	10400.00	8.84	48.73	74.00	-25.27	189	159	Peak	VERTICAL
3	11190.00	10.36	47.85	74.00	-26.15	189	159	Peak	VERTICAL
4	13995.00	12.98	51.99	74.00	-22.01	178	174	Peak	VERTICAL
5	15600.00	10.22	44.48	74.00	-29.52	181	187	Peak	VERTICAL
6	17475.00	15.60	52.46	74.00	-21.54	151	152	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5240MHz

Data: 150

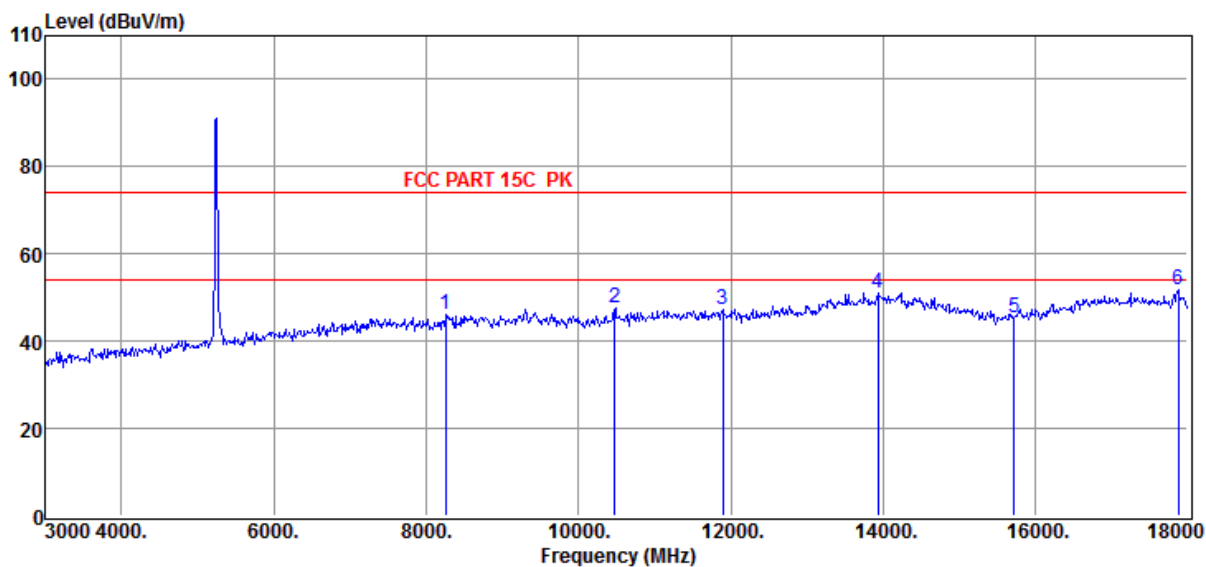

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8250.00	6.25	46.28	74.00	-27.72	189	182	Peak	VERTICAL
2	10480.00	8.91	47.70	74.00	-26.30	169	152	Peak	VERTICAL
3	11895.00	10.01	47.13	74.00	-26.87	181	176	Peak	VERTICAL
4	13935.00	12.73	51.21	74.00	-22.79	172	158	Peak	VERTICAL
5	15720.00	10.99	45.30	74.00	-28.70	178	186	Peak	VERTICAL
6	17880.00	15.28	51.70	74.00	-22.30	163	186	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5240MHz

Data: 151

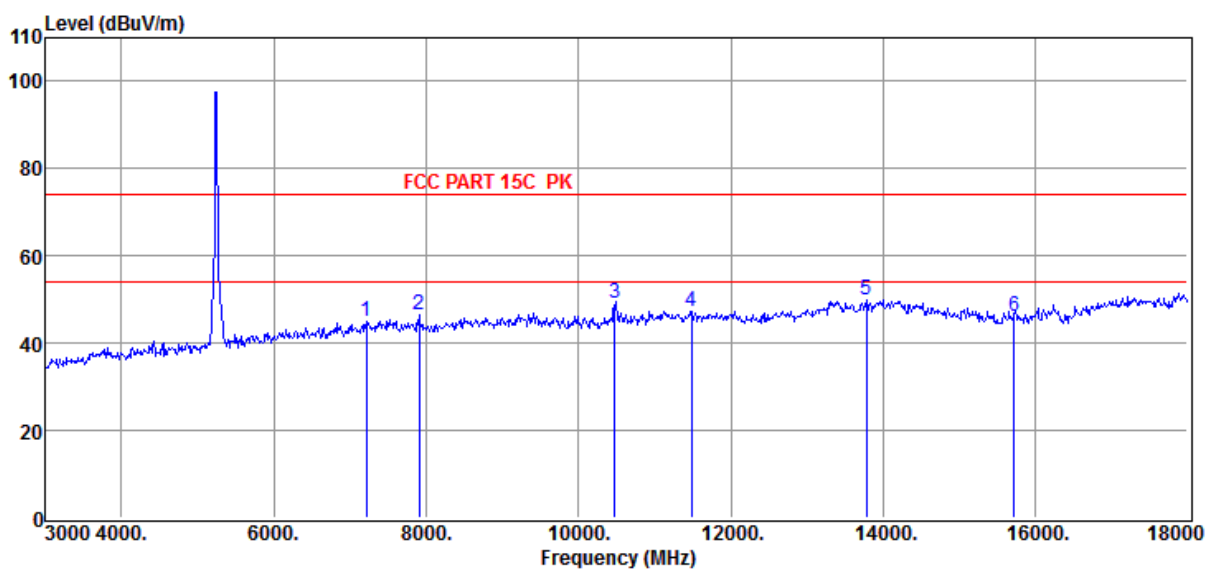

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7215.00	5.86	45.04	74.00	-28.96	185	170	Peak	HORIZONTAL
2	7905.00	5.86	46.38	74.00	-27.62	180	178	Peak	HORIZONTAL
3	10480.00	8.91	49.32	74.00	-24.68	164	152	Peak	HORIZONTAL
4	11490.00	10.09	47.40	74.00	-26.60	158	153	Peak	HORIZONTAL
5	13785.00	11.99	49.88	74.00	-24.12	175	179	Peak	HORIZONTAL
6	15720.00	10.99	46.04	74.00	-27.96	169	179	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5260MHz

Data: 152

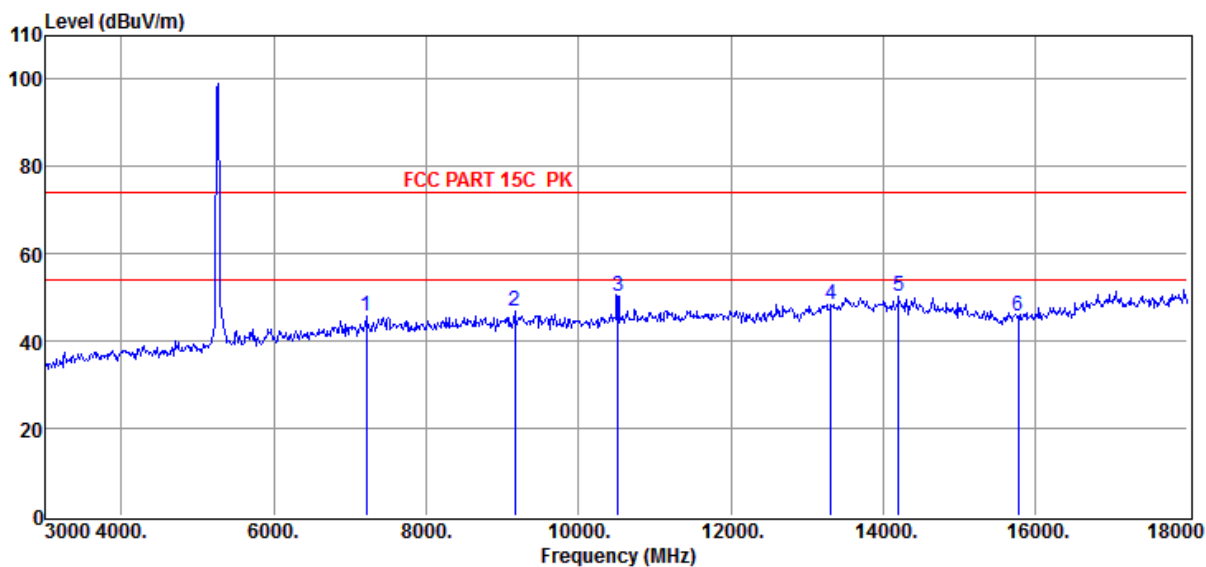

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7215.00	5.86	45.74	74.00	-28.26	158	185	Peak	HORIZONTAL
2	9165.00	7.20	46.77	74.00	-27.23	167	152	Peak	HORIZONTAL
3	10520.00	8.98	50.28	74.00	-23.72	184	177	Peak	HORIZONTAL
4	13320.00	10.91	48.55	74.00	-25.45	159	155	Peak	HORIZONTAL
5	14205.00	14.01	50.20	74.00	-23.80	158	180	Peak	HORIZONTAL
6	15780.00	10.50	45.92	74.00	-28.08	165	185	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5260MHz

Data: 153

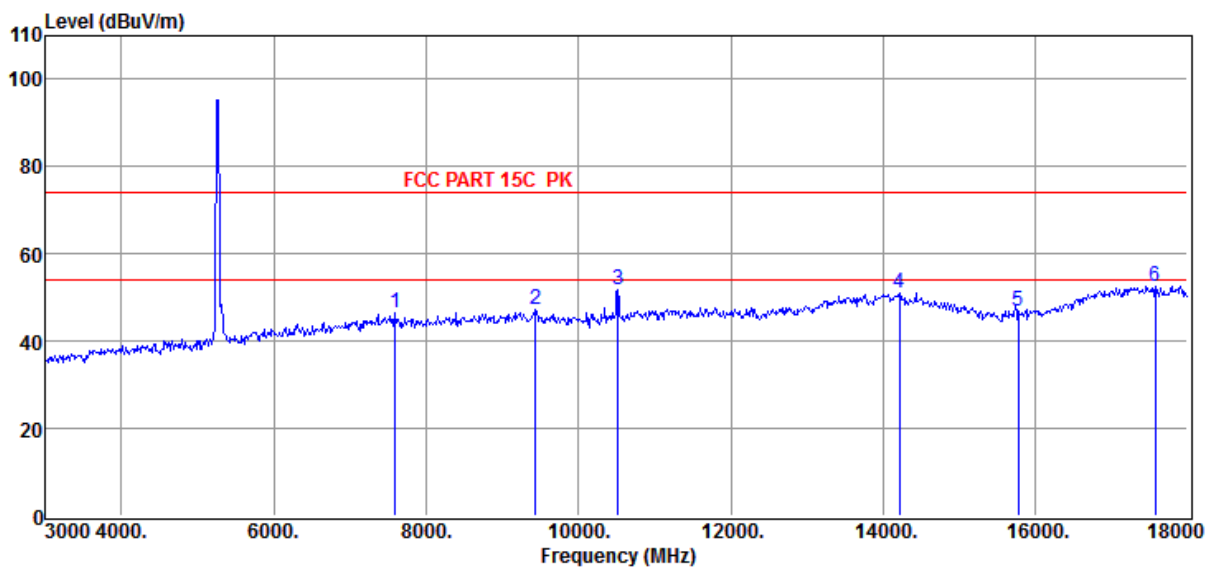

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	46.45	74.00	-27.55	180	190	Peak	VERTICAL
2	9435.00	8.05	47.40	74.00	-26.60	153	186	Peak	VERTICAL
3	10520.00	8.98	51.87	74.00	-22.13	179	187	Peak	VERTICAL
4	14220.00	13.82	51.00	74.00	-23.00	172	155	Peak	VERTICAL
5	15780.00	10.50	47.01	74.00	-26.99	188	166	Peak	VERTICAL
6	17580.00	15.46	52.50	74.00	-21.50	186	150	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5280MHz

Data: 154

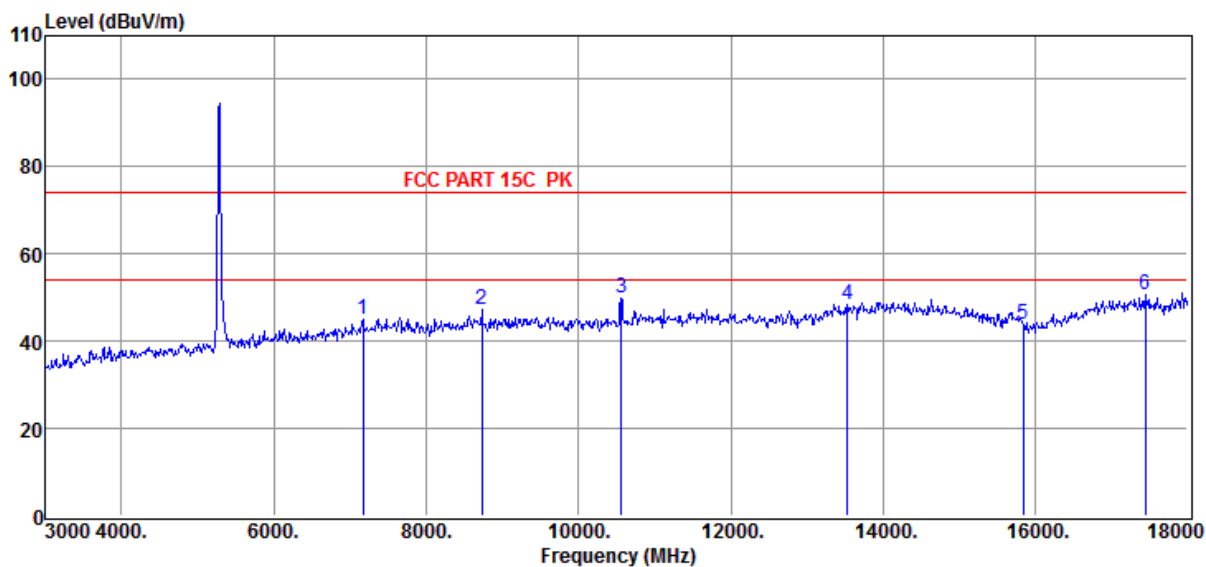

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7170.00	5.72	44.95	74.00	-29.05	180	156	Peak	VERTICAL
2	8730.00	6.66	47.10	74.00	-26.90	173	176	Peak	VERTICAL
3	10560.00	9.06	49.74	74.00	-24.26	166	152	Peak	VERTICAL
4	13530.00	11.38	48.47	74.00	-25.53	160	163	Peak	VERTICAL
5	15840.00	10.49	43.90	74.00	-30.10	178	158	Peak	VERTICAL
6	17445.00	15.59	50.61	74.00	-23.39	185	186	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5280MHz

Data: 155

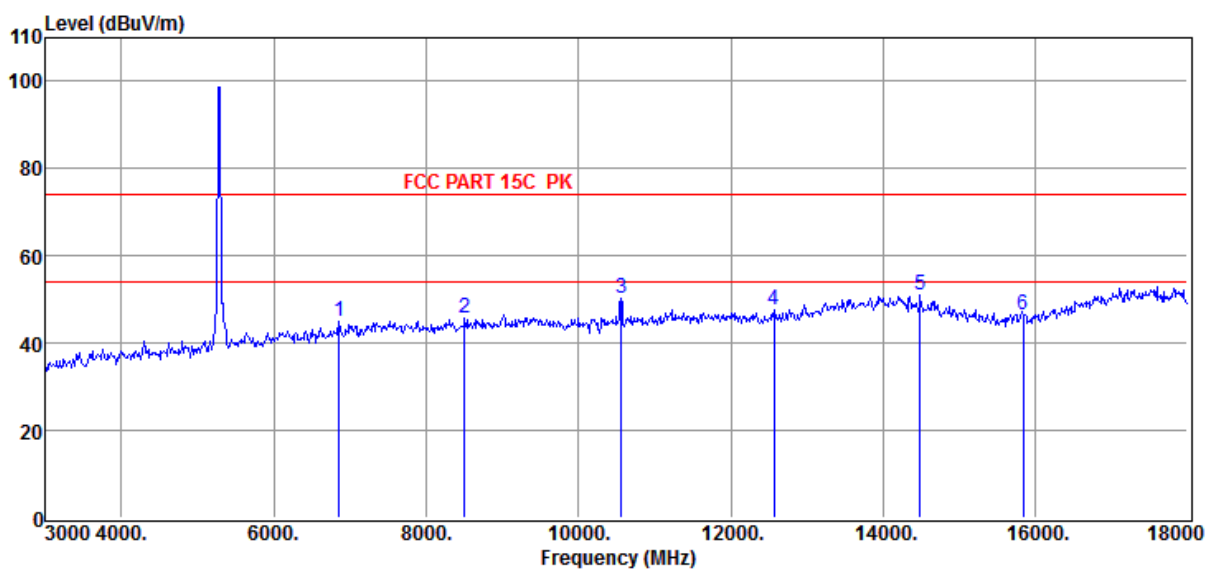

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6855.00	5.40	45.07	74.00	-28.93	155	157	Peak	HORIZONTAL
2	8505.00	6.46	45.59	74.00	-28.41	160	156	Peak	HORIZONTAL
3	10560.00	9.06	50.21	74.00	-23.79	163	164	Peak	HORIZONTAL
4	12570.00	9.62	47.79	74.00	-26.21	175	152	Peak	HORIZONTAL
5	14490.00	12.93	50.96	74.00	-23.04	159	158	Peak	HORIZONTAL
6	15840.00	10.49	46.61	74.00	-27.39	173	166	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 156

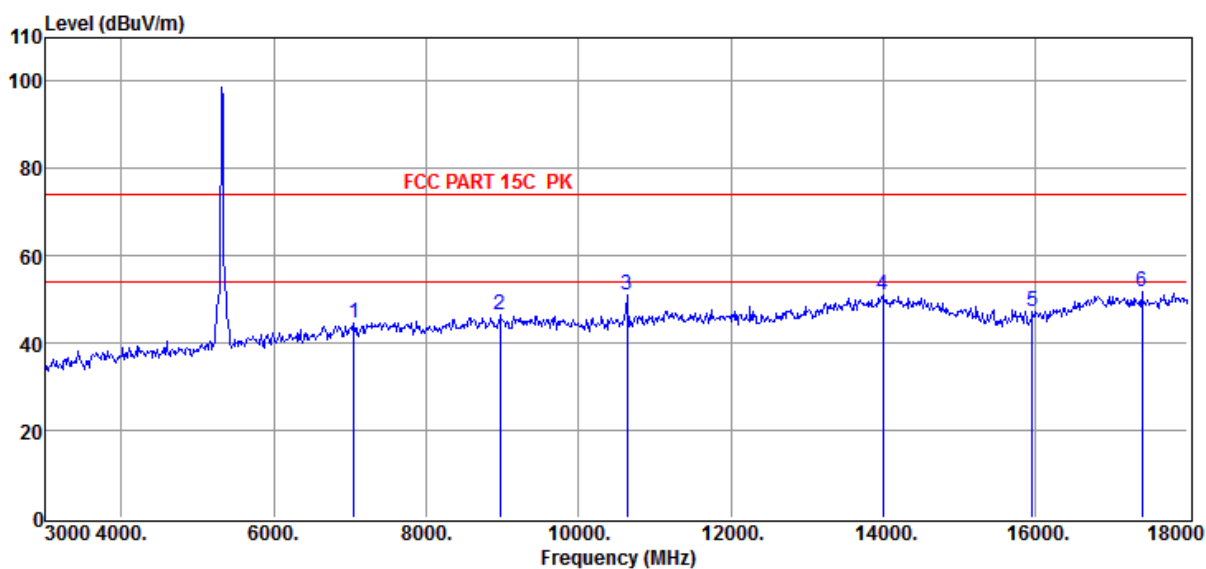

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7050.00	6.21	44.79	74.00	-29.21	150	189	Peak	HORIZONTAL
2	8970.00	6.95	46.57	74.00	-27.43	166	174	Peak	HORIZONTAL
3	10640.00	9.14	51.05	74.00	-22.95	151	150	Peak	HORIZONTAL
4	13995.00	12.98	51.03	74.00	-22.97	172	156	Peak	HORIZONTAL
5	15960.00	10.72	47.35	74.00	-26.65	158	182	Peak	HORIZONTAL
6	17400.00	15.59	51.72	74.00	-22.28	163	171	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 157

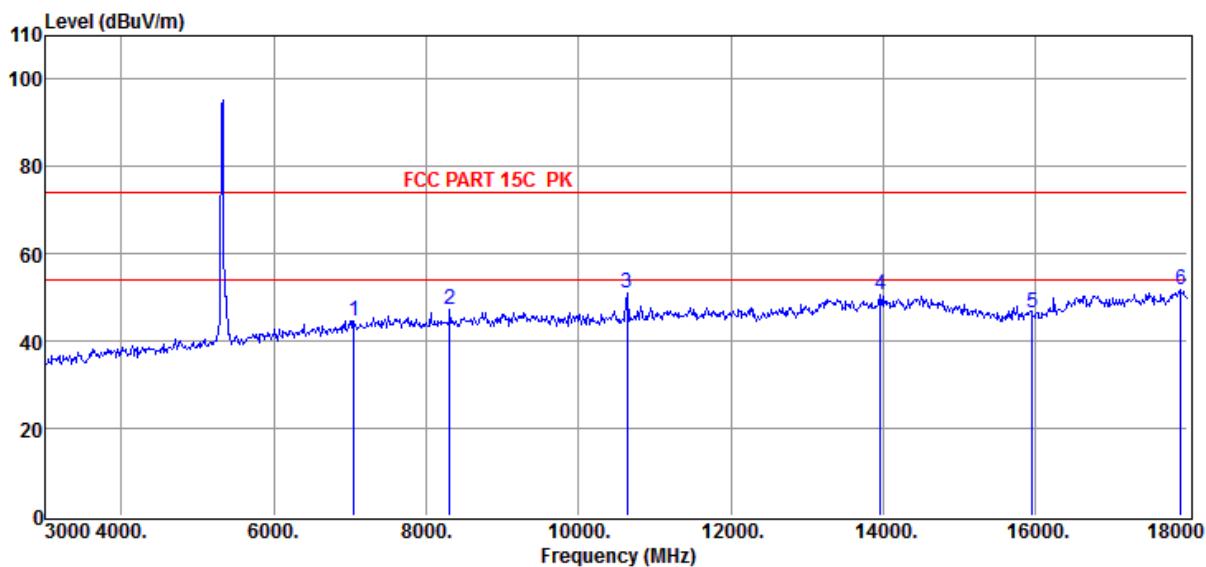

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7050.00	6.21	44.55	74.00	-29.45	186	174	Peak	VERTICAL
2	8310.00	6.32	47.36	74.00	-26.64	163	171	Peak	VERTICAL
3	10640.00	9.14	50.92	74.00	-23.08	159	160	Peak	VERTICAL
4	13965.00	12.85	50.64	74.00	-23.36	185	163	Peak	VERTICAL
5	15960.00	10.72	46.59	74.00	-27.41	175	169	Peak	VERTICAL
6	17910.00	15.19	51.92	74.00	-22.08	169	175	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHz

Data: 158

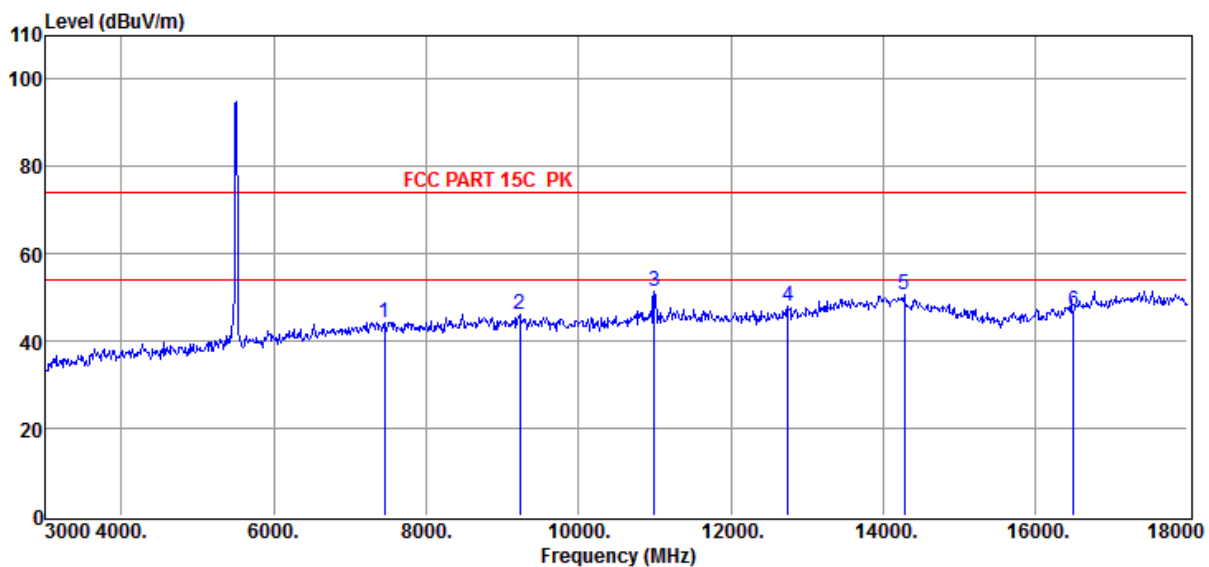

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7455.00	6.51	44.40	74.00	-29.60	164	168	Peak	VERTICAL
2	9225.00	7.37	46.25	74.00	-27.75	176	168	Peak	VERTICAL
3	11000.00	9.85	51.60	74.00	-22.40	187	175	Peak	VERTICAL
4	12750.00	9.74	48.08	74.00	-25.92	169	154	Peak	VERTICAL
5	14280.00	13.10	50.54	74.00	-23.46	169	151	Peak	VERTICAL
6	16500.00	13.06	47.01	74.00	-26.99	164	162	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHz

Data: 159

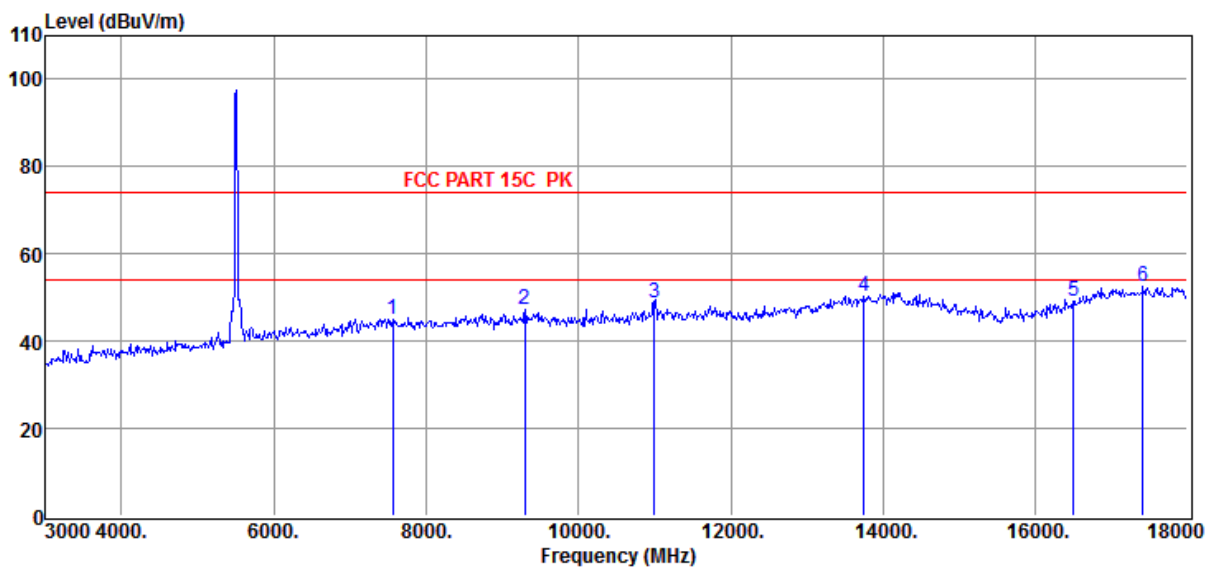

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7560.00	6.58	45.07	74.00	-28.93	176	154	Peak	HORIZONTAL
2	9300.00	7.67	47.32	74.00	-26.68	168	176	Peak	HORIZONTAL
3	11000.00	9.85	48.63	74.00	-25.37	155	178	Peak	HORIZONTAL
4	13755.00	11.96	50.20	74.00	-23.80	167	159	Peak	HORIZONTAL
5	16500.00	13.06	49.25	74.00	-24.75	171	166	Peak	HORIZONTAL
6	17415.00	15.59	52.50	74.00	-21.50	176	157	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5580MHz

Data: 160

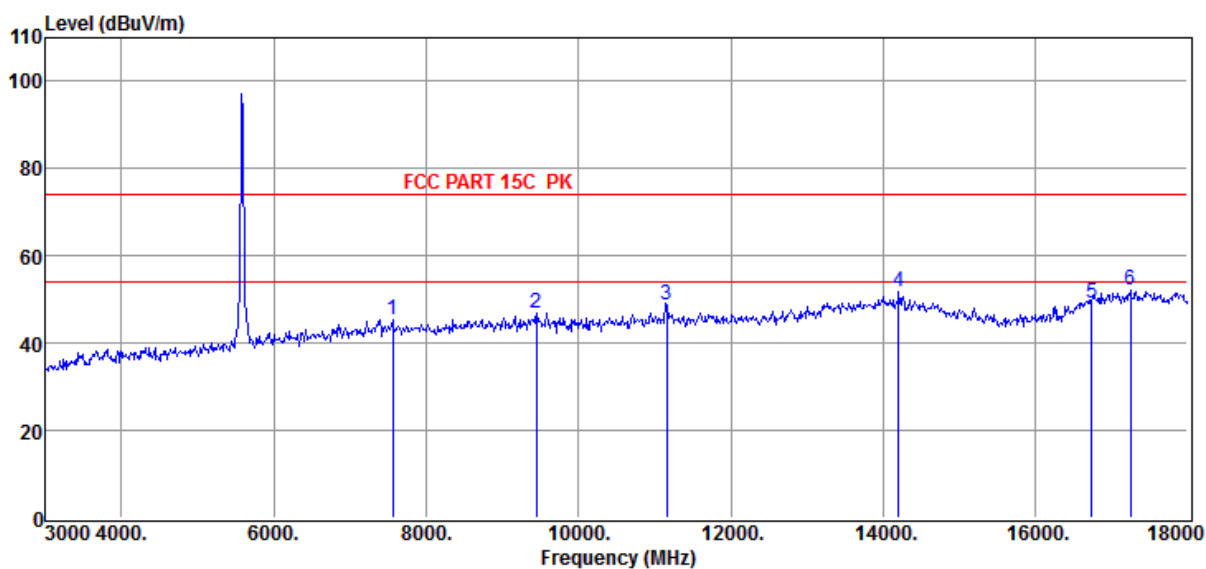

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7560.00	6.58	45.41	74.00	-28.59	164	177	Peak	HORIZONTAL
2	9450.00	7.98	47.02	74.00	-26.98	175	173	Peak	HORIZONTAL
3	11160.00	10.24	48.95	74.00	-25.05	171	154	Peak	HORIZONTAL
4	14205.00	14.01	51.87	74.00	-22.13	180	169	Peak	HORIZONTAL
5	16740.00	14.70	49.14	74.00	-24.86	178	179	Peak	HORIZONTAL
6	17250.00	15.69	51.99	74.00	-22.01	171	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5580MHz

Data: 161

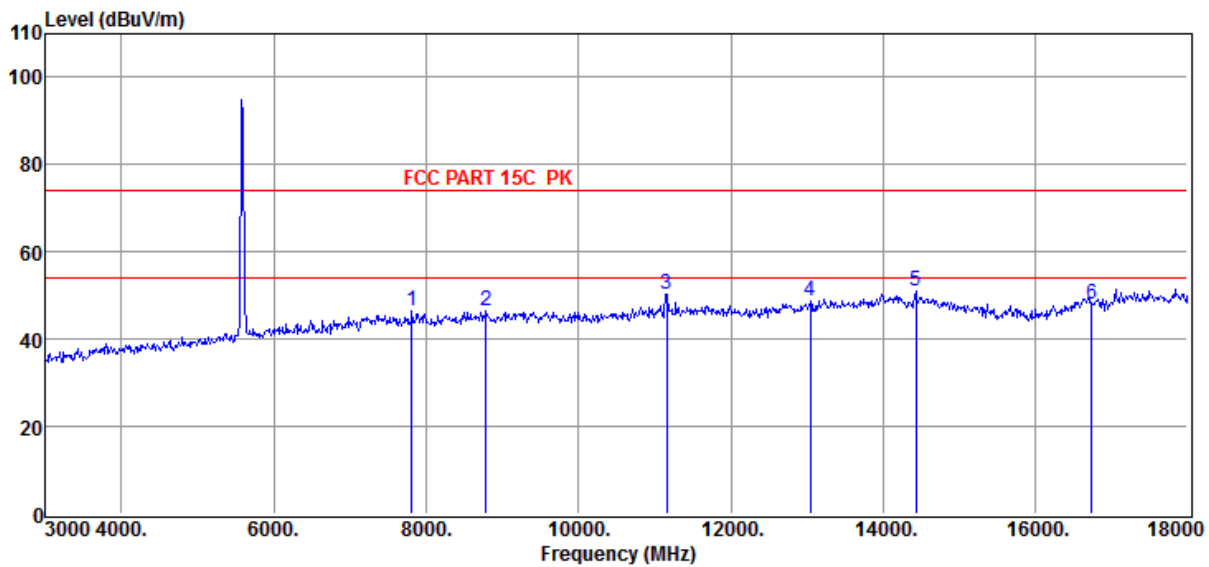

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7815.00	6.17	46.34	74.00	-27.66	169	164	Peak	VERTICAL
2	8790.00	6.67	46.51	74.00	-27.49	174	163	Peak	VERTICAL
3	11160.00	10.24	50.39	74.00	-23.61	152	189	Peak	VERTICAL
4	13050.00	10.22	48.72	74.00	-25.28	155	188	Peak	VERTICAL
5	14430.00	13.54	50.92	74.00	-23.08	180	159	Peak	VERTICAL
6	16740.00	14.70	48.00	74.00	-26.00	190	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5700MHz

Data: 162

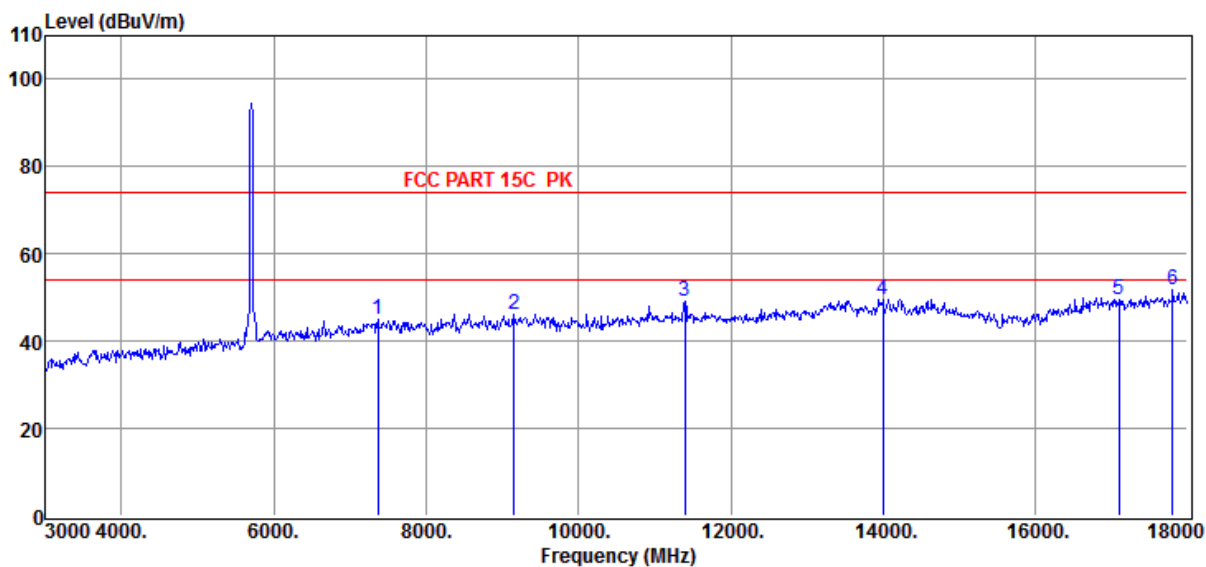

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	44.95	74.00	-29.05	157	180	Peak	VERTICAL
2	9150.00	7.17	46.13	74.00	-27.87	162	172	Peak	VERTICAL
3	11400.00	10.06	49.17	74.00	-24.83	183	186	Peak	VERTICAL
4	13995.00	12.98	49.71	74.00	-24.29	165	172	Peak	VERTICAL
5	17100.00	15.56	49.55	74.00	-24.45	166	186	Peak	VERTICAL
6	17805.00	15.30	51.82	74.00	-22.18	157	175	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5700MHz

Data: 163

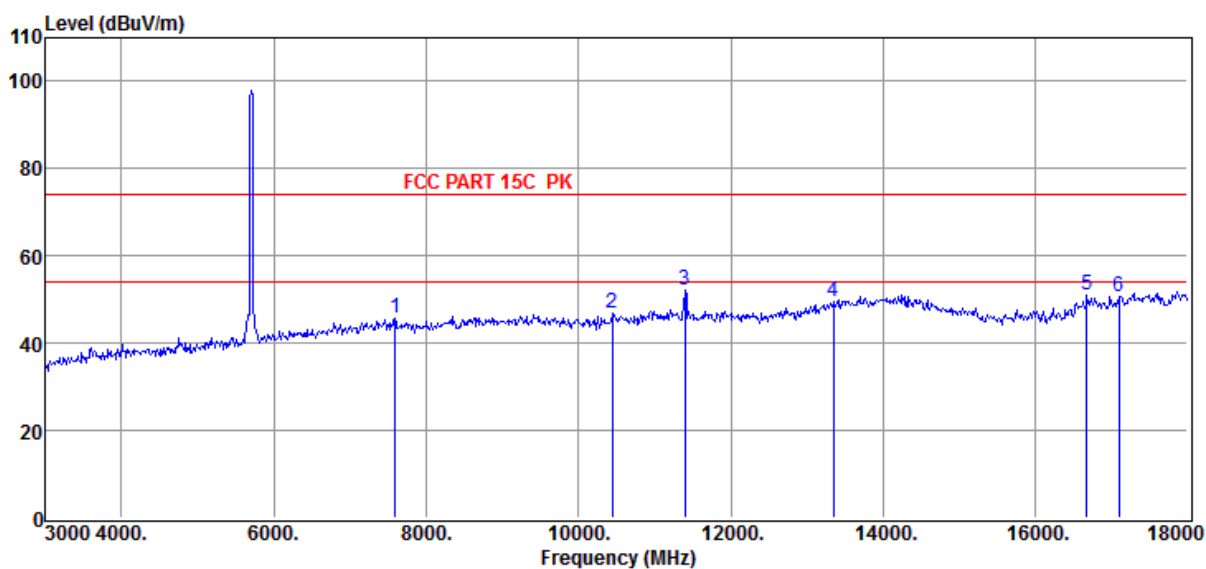

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.69	74.00	-28.31	171	173	Peak	HORIZONTAL
2	10440.00	8.88	46.72	74.00	-27.28	172	175	Peak	HORIZONTAL
3	11400.00	10.06	52.05	74.00	-21.95	189	165	Peak	HORIZONTAL
4	13350.00	10.86	49.48	74.00	-24.52	156	174	Peak	HORIZONTAL
5	16680.00	14.17	51.05	74.00	-22.95	173	184	Peak	HORIZONTAL
6	17100.00	15.56	50.58	74.00	-23.42	158	167	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 164

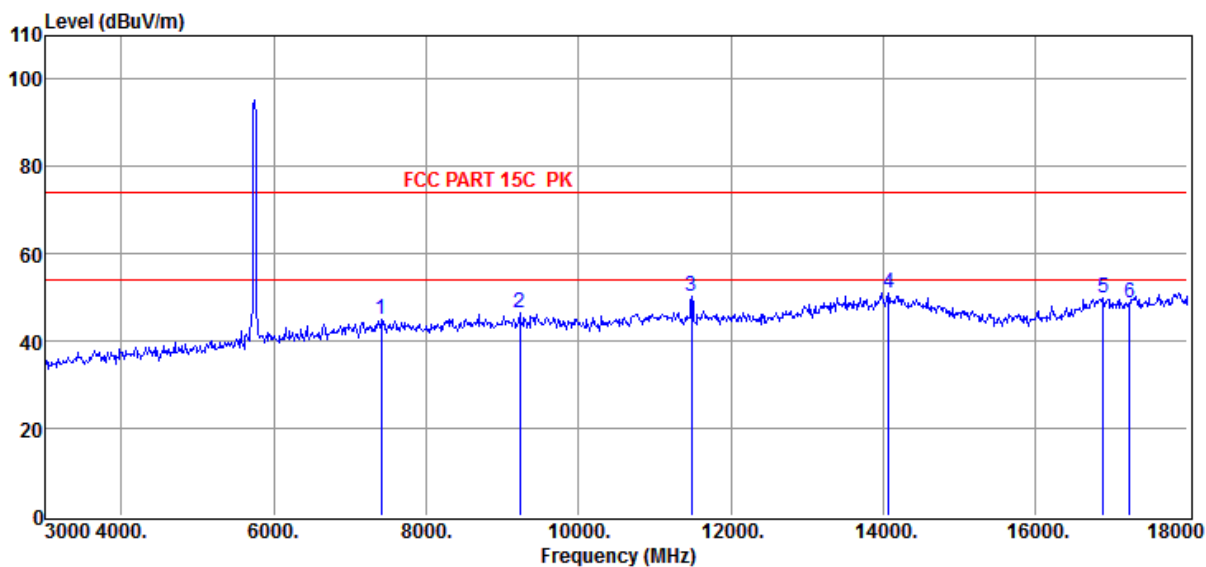

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7410.00	6.19	45.02	74.00	-28.98	185	188	Peak	HORIZONTAL
2	9225.00	7.37	46.32	74.00	-27.68	189	150	Peak	HORIZONTAL
3	11490.00	10.09	50.44	74.00	-23.56	177	161	Peak	HORIZONTAL
4	14070.00	13.05	51.02	74.00	-22.98	164	177	Peak	HORIZONTAL
5	16890.00	14.93	49.72	74.00	-24.28	183	159	Peak	HORIZONTAL
6	17235.00	15.65	48.62	74.00	-25.38	185	182	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 165

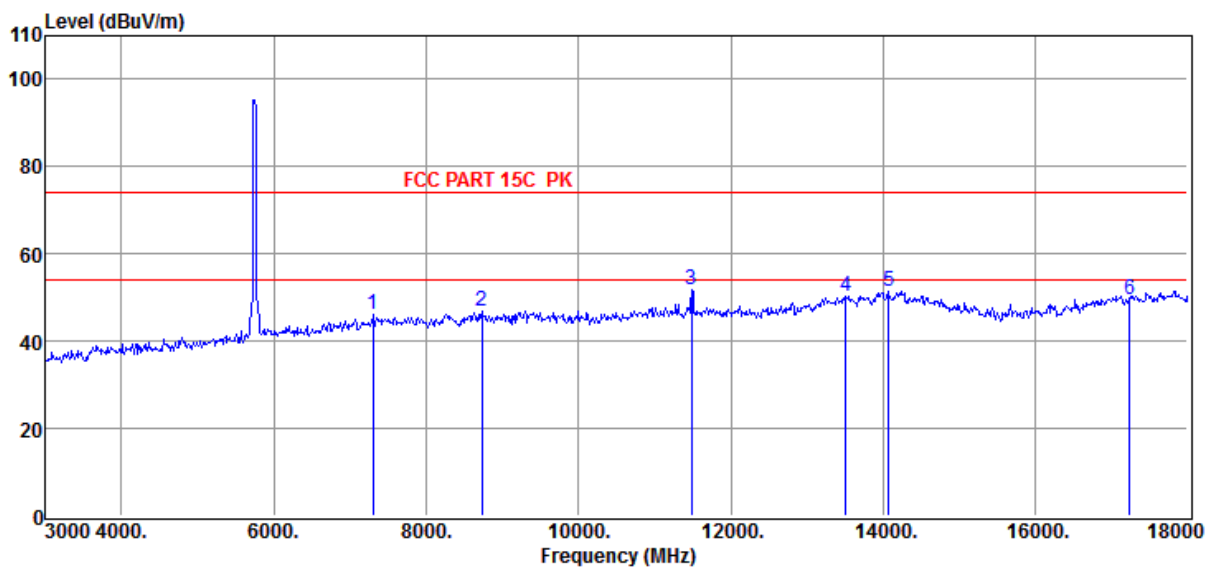

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7305.00	6.30	46.12	74.00	-27.88	171	168	Peak	VERTICAL
2	8730.00	6.66	47.04	74.00	-26.96	182	185	Peak	VERTICAL
3	11490.00	10.09	51.70	74.00	-22.30	152	155	Peak	VERTICAL
4	13515.00	11.36	50.31	74.00	-23.69	166	179	Peak	VERTICAL
5	14070.00	13.05	51.50	74.00	-22.50	180	174	Peak	VERTICAL
6	17235.00	15.65	49.62	74.00	-24.38	178	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5785MHz

Data: 166

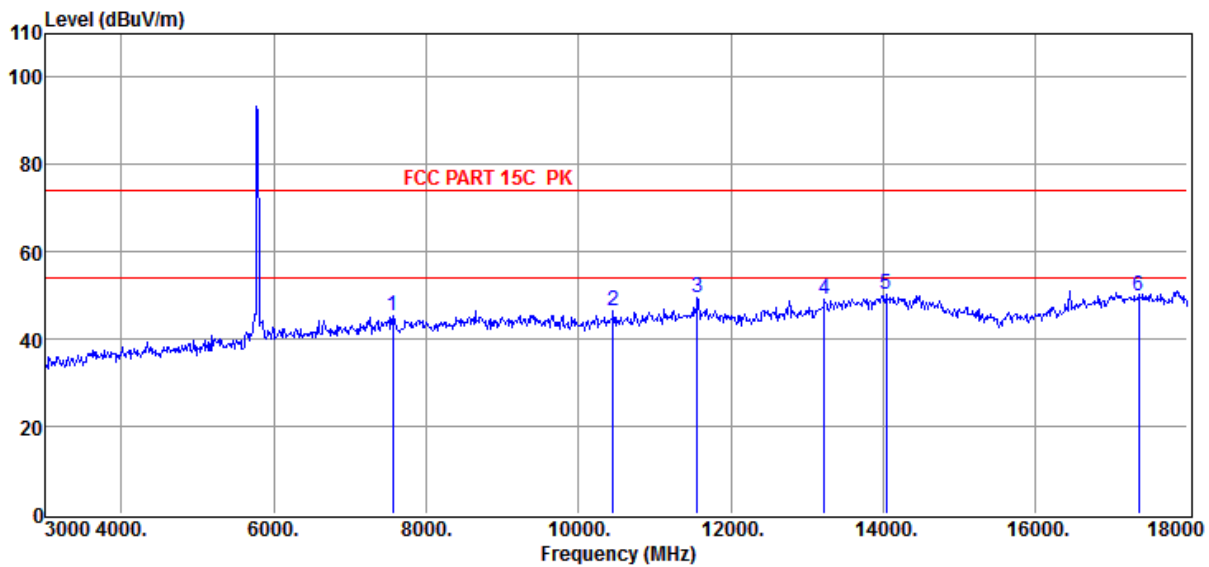

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7560.00	6.58	45.24	74.00	-28.76	152	181	Peak	VERTICAL
2	10455.00	8.89	46.31	74.00	-27.69	184	168	Peak	VERTICAL
3	11565.00	10.07	49.40	74.00	-24.60	187	169	Peak	VERTICAL
4	13230.00	10.44	49.09	74.00	-24.91	171	169	Peak	VERTICAL
5	14040.00	13.02	50.33	74.00	-23.67	165	153	Peak	VERTICAL
6	17355.00	15.70	49.97	74.00	-24.03	151	187	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5785MHz

Data: 167

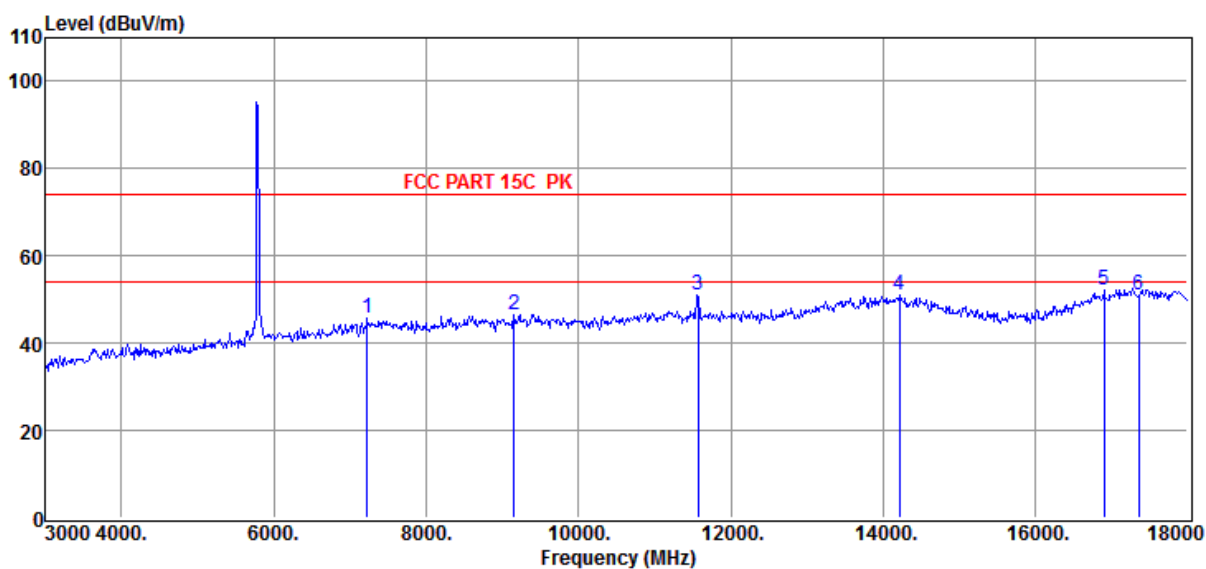

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7230.00	6.10	45.71	74.00	-28.29	153	189	Peak	HORIZONTAL
2	9150.00	7.17	46.63	74.00	-27.37	152	151	Peak	HORIZONTAL
3	11570.00	10.07	51.02	74.00	-22.98	189	179	Peak	HORIZONTAL
4	14220.00	13.82	50.88	74.00	-23.12	166	165	Peak	HORIZONTAL
5	16905.00	14.95	52.15	74.00	-21.85	159	151	Peak	HORIZONTAL
6	17355.00	15.70	51.05	74.00	-22.95	187	176	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 168

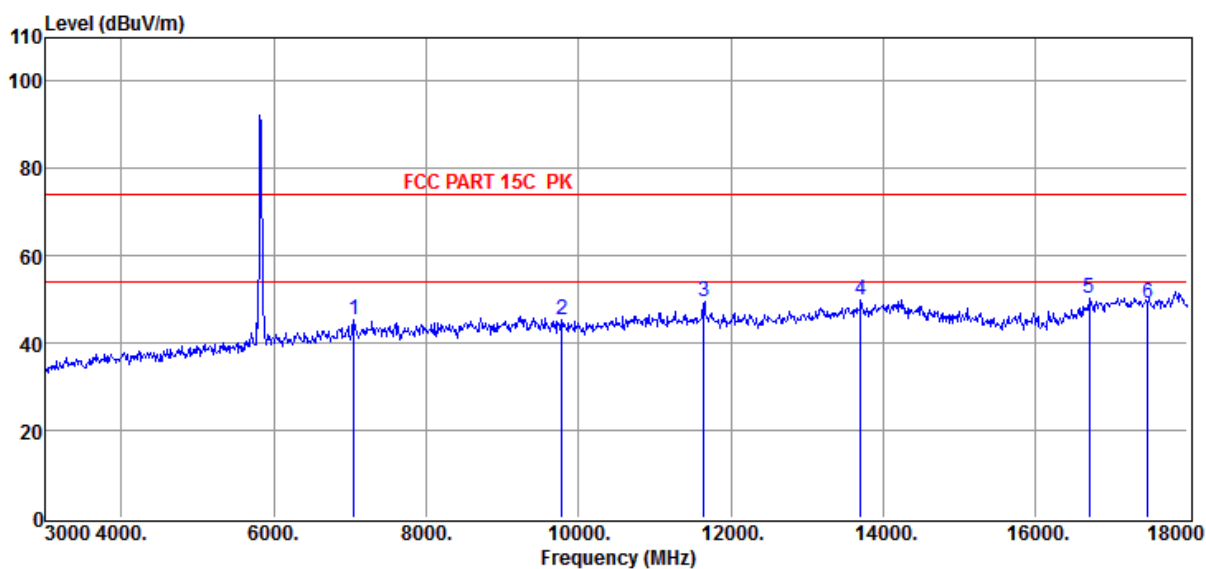

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7050.00	6.21	45.51	74.00	-28.49	179	153	Peak	HORIZONTAL
2	9780.00	8.10	45.48	74.00	-28.52	162	169	Peak	HORIZONTAL
3	11650.00	10.05	49.33	74.00	-24.67	184	157	Peak	HORIZONTAL
4	13710.00	11.91	50.03	74.00	-23.97	171	170	Peak	HORIZONTAL
5	16710.00	14.34	50.21	74.00	-23.79	166	176	Peak	HORIZONTAL
6	17475.00	15.60	49.15	74.00	-24.85	190	182	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 169

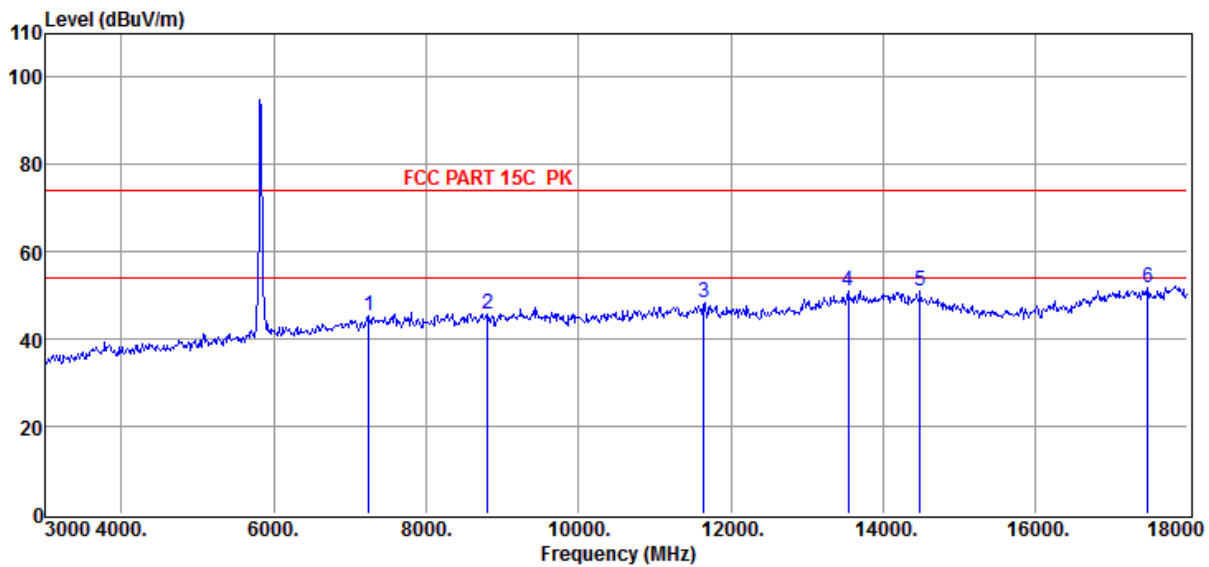

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7245.00	6.33	45.44	74.00	-28.56	155	180	Peak	VERTICAL
2	8805.00	6.66	45.72	74.00	-28.28	156	166	Peak	VERTICAL
3	11650.00	10.05	48.44	74.00	-25.56	159	173	Peak	VERTICAL
4	13545.00	11.39	50.92	74.00	-23.08	182	187	Peak	VERTICAL
5	14490.00	12.93	50.85	74.00	-23.15	170	166	Peak	VERTICAL
6	17475.00	15.60	51.75	74.00	-22.25	165	188	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 170

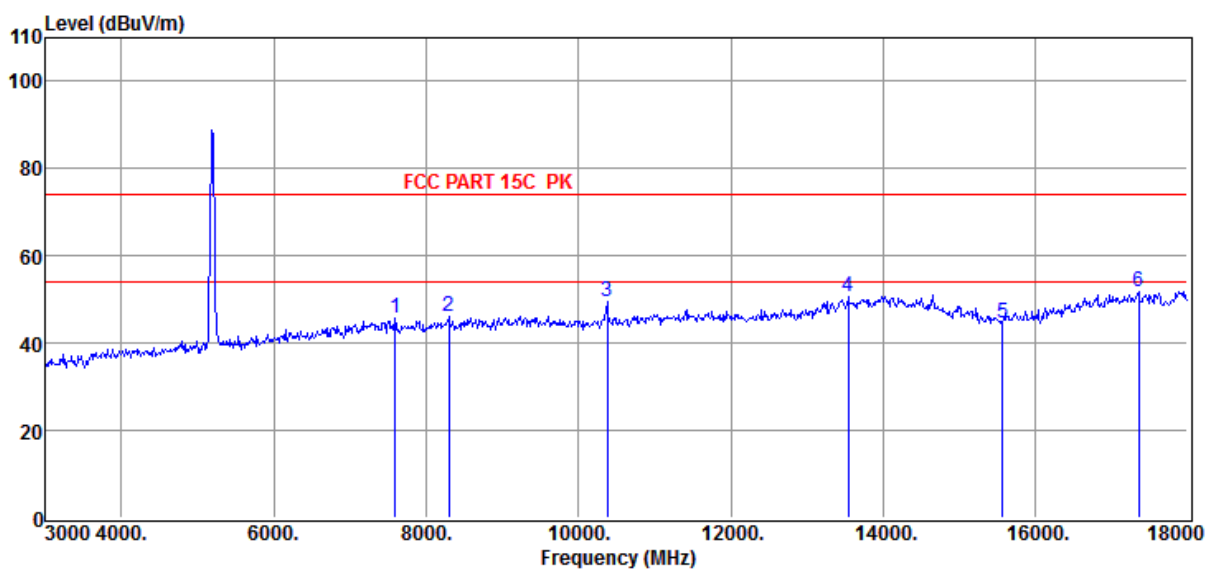

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.92	74.00	-28.08	186	180	Peak	VERTICAL
2	8295.00	6.34	46.11	74.00	-27.89	167	171	Peak	VERTICAL
3	10380.00	8.80	49.45	74.00	-24.55	173	161	Peak	VERTICAL
4	13545.00	11.39	50.63	74.00	-23.37	190	187	Peak	VERTICAL
5	15570.00	10.26	44.48	74.00	-29.52	171	188	Peak	VERTICAL
6	17355.00	15.70	51.70	74.00	-22.30	171	153	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 171

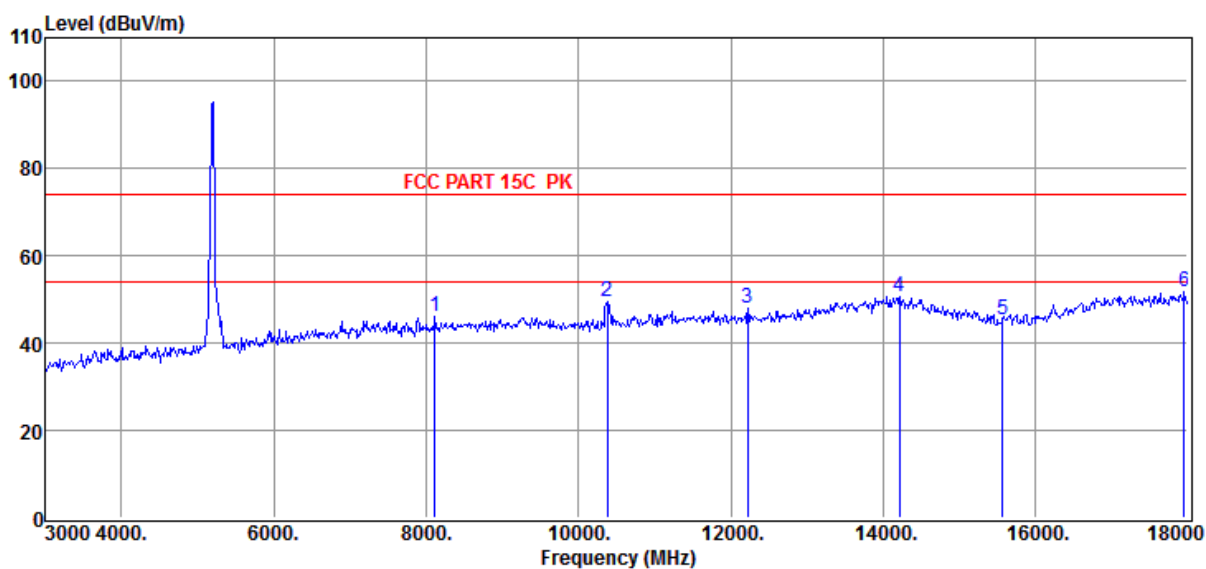

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8115.00	5.77	46.08	74.00	-27.92	156	180	Peak	HORIZONTAL
2	10380.00	8.80	49.64	74.00	-24.36	161	165	Peak	HORIZONTAL
3	12225.00	9.58	47.91	74.00	-26.09	163	157	Peak	HORIZONTAL
4	14220.00	13.82	50.68	74.00	-23.32	167	153	Peak	HORIZONTAL
5	15570.00	10.26	45.26	74.00	-28.74	186	161	Peak	HORIZONTAL
6	17955.00	14.83	51.66	74.00	-22.34	175	157	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5230MHz

Data: 172

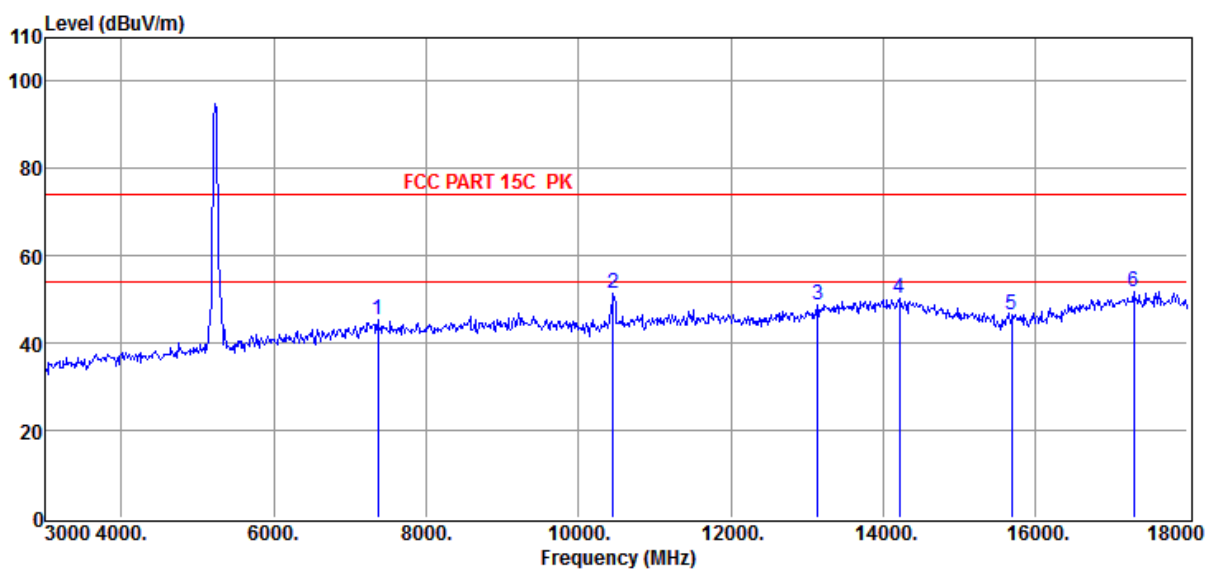

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	45.25	74.00	-28.75	162	182	Peak	HORIZONTAL
2	10460.00	8.89	51.31	74.00	-22.69	160	178	Peak	HORIZONTAL
3	13140.00	10.49	48.64	74.00	-25.36	186	188	Peak	HORIZONTAL
4	14220.00	13.82	50.21	74.00	-23.79	150	183	Peak	HORIZONTAL
5	15690.00	11.06	46.47	74.00	-27.53	166	183	Peak	HORIZONTAL
6	17295.00	15.81	51.76	74.00	-22.24	152	155	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5230MHz

Data: 173

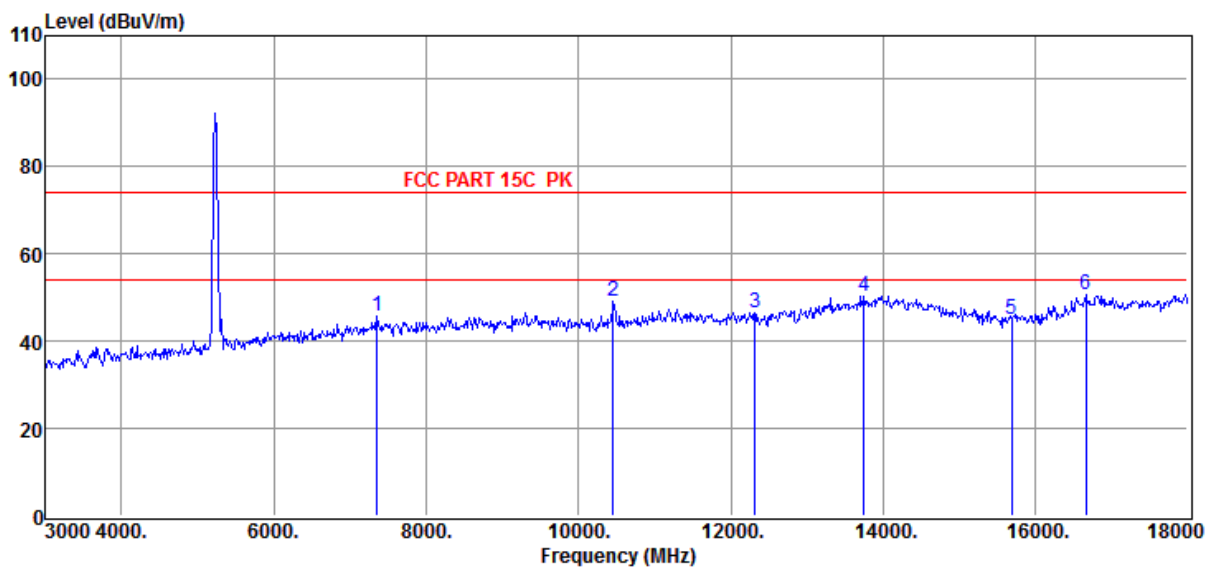

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7350.00	6.57	45.79	74.00	-28.21	175	153	Peak	VERTICAL
2	10455.00	8.89	49.14	74.00	-24.86	180	189	Peak	VERTICAL
3	12315.00	9.33	46.56	74.00	-27.44	158	188	Peak	VERTICAL
4	13755.00	11.96	50.25	74.00	-23.75	182	174	Peak	VERTICAL
5	15690.00	11.06	45.04	74.00	-28.96	155	173	Peak	VERTICAL
6	16665.00	14.14	50.49	74.00	-23.51	172	167	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5270MHz

Data: 174

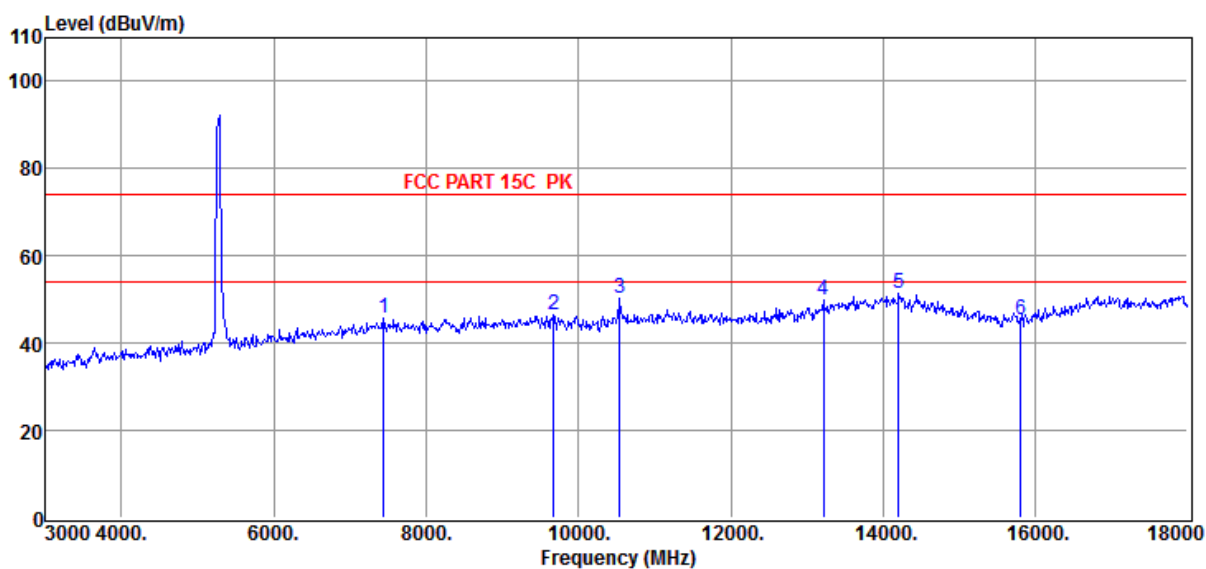

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7440.00	6.43	45.56	74.00	-28.44	161	155	Peak	VERTICAL
2	9675.00	8.07	46.31	74.00	-27.69	186	177	Peak	VERTICAL
3	10540.00	9.03	50.14	74.00	-23.86	189	172	Peak	VERTICAL
4	13215.00	10.35	49.80	74.00	-24.20	174	150	Peak	VERTICAL
5	14205.00	14.01	51.32	74.00	-22.68	161	174	Peak	VERTICAL
6	15810.00	10.37	45.23	74.00	-28.77	162	180	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5270MHz

Data: 175

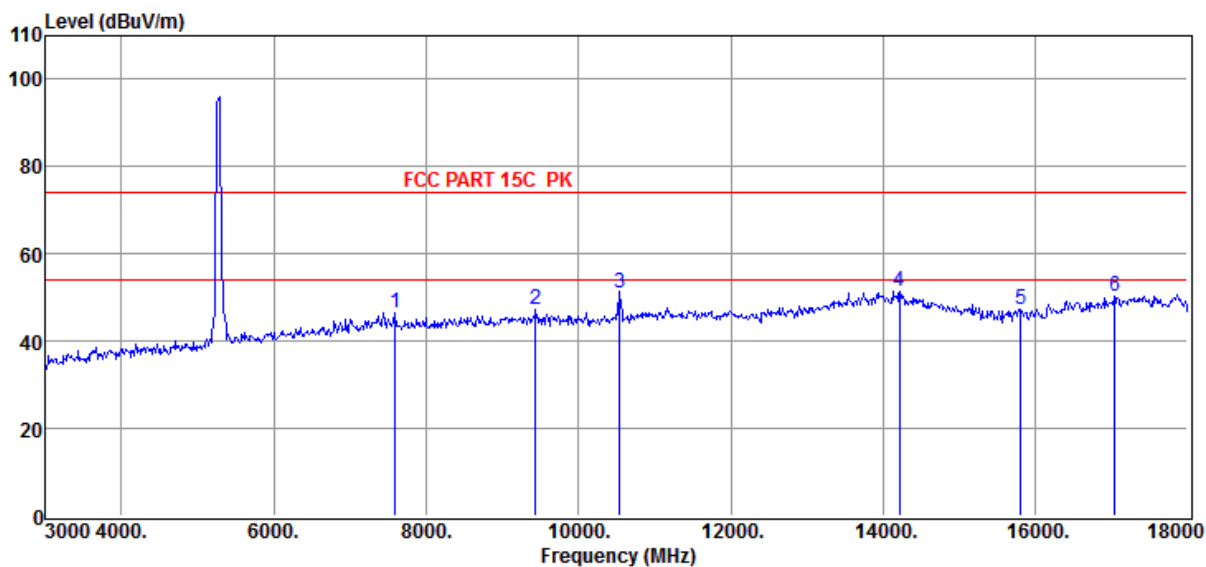

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	46.64	74.00	-27.36	176	158	Peak	HORIZONTAL
2	9435.00	8.05	47.23	74.00	-26.77	156	156	Peak	HORIZONTAL
3	10540.00	9.03	50.94	74.00	-23.06	152	164	Peak	HORIZONTAL
4	14220.00	13.82	51.47	74.00	-22.53	185	188	Peak	HORIZONTAL
5	15810.00	10.37	47.27	74.00	-26.73	165	179	Peak	HORIZONTAL
6	17040.00	16.02	50.45	74.00	-23.55	165	184	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 176

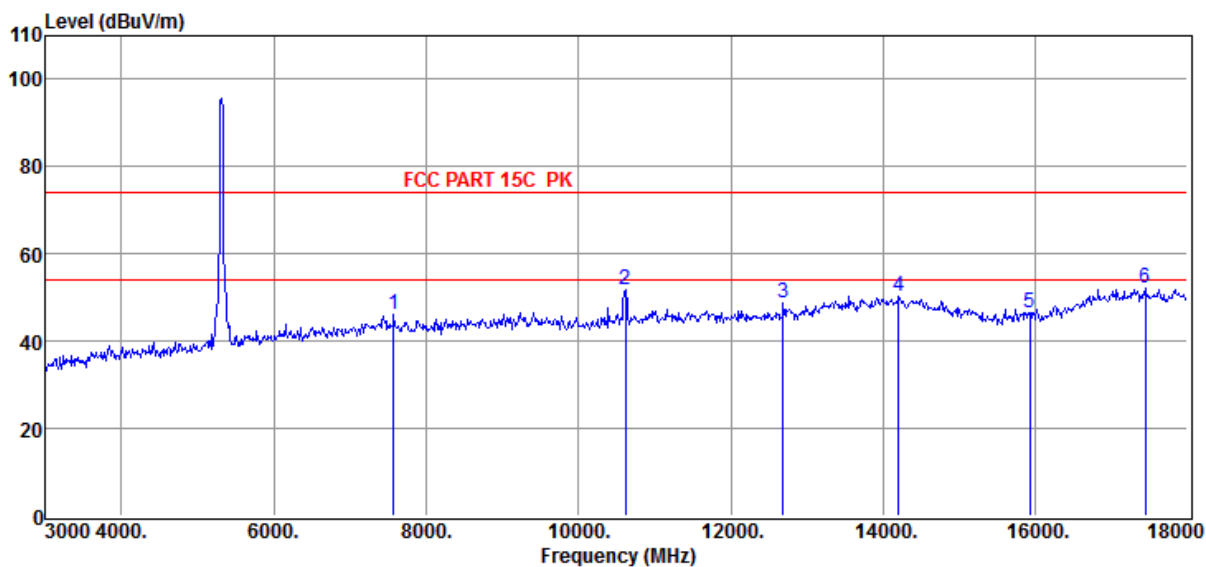

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	45.97	74.00	-28.03	173	168	Peak	HORIZONTAL
2	10620.00	9.15	51.63	74.00	-22.37	158	164	Peak	HORIZONTAL
3	12690.00	9.87	48.73	74.00	-25.27	170	183	Peak	HORIZONTAL
4	14205.00	14.01	50.28	74.00	-23.72	184	188	Peak	HORIZONTAL
5	15930.00	10.73	46.33	74.00	-27.67	158	162	Peak	HORIZONTAL
6	17445.00	15.59	52.22	74.00	-21.78	154	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 177

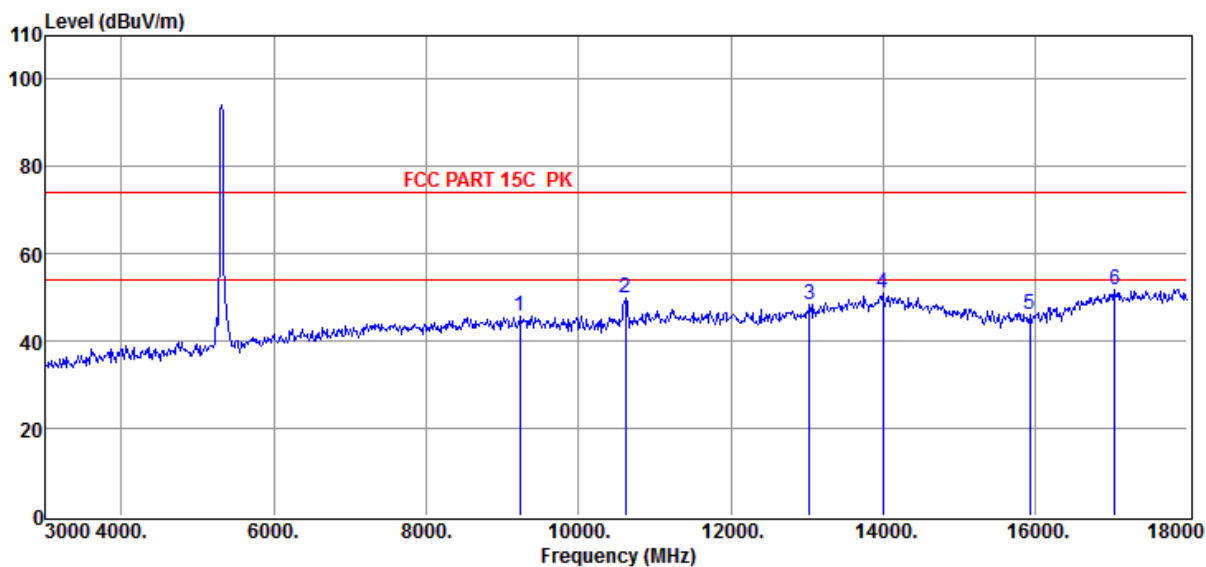

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	9225.00	7.37	45.60	74.00	-28.40	186	186	Peak	VERTICAL
2	10620.00	9.15	50.08	74.00	-23.92	171	163	Peak	VERTICAL
3	13035.00	10.08	48.40	74.00	-25.60	169	154	Peak	VERTICAL
4	13995.00	12.98	50.98	74.00	-23.02	162	181	Peak	VERTICAL
5	15930.00	10.73	46.24	74.00	-27.76	163	164	Peak	VERTICAL
6	17040.00	16.02	51.62	74.00	-22.38	185	164	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 178

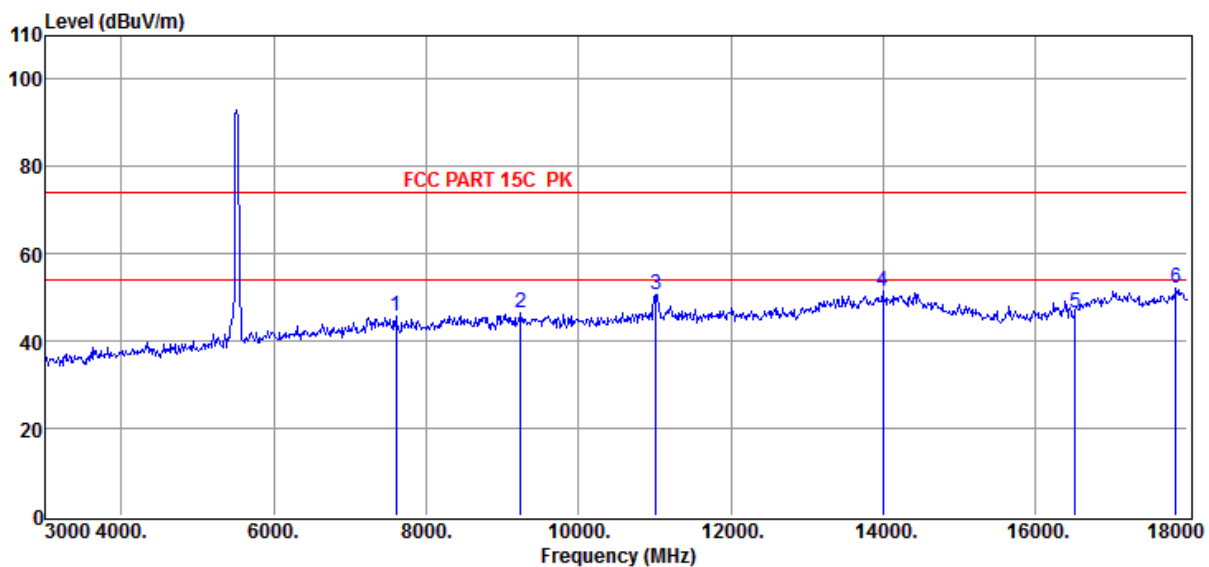

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7605.00	6.32	45.89	74.00	-28.11	157	167	Peak	VERTICAL
2	9240.00	7.43	46.57	74.00	-27.43	174	164	Peak	VERTICAL
3	11020.00	9.88	50.79	74.00	-23.21	152	154	Peak	VERTICAL
4	13995.00	12.98	51.23	74.00	-22.77	167	160	Peak	VERTICAL
5	16530.00	13.34	46.53	74.00	-27.47	189	158	Peak	VERTICAL
6	17850.00	15.29	51.99	74.00	-22.01	150	157	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 179

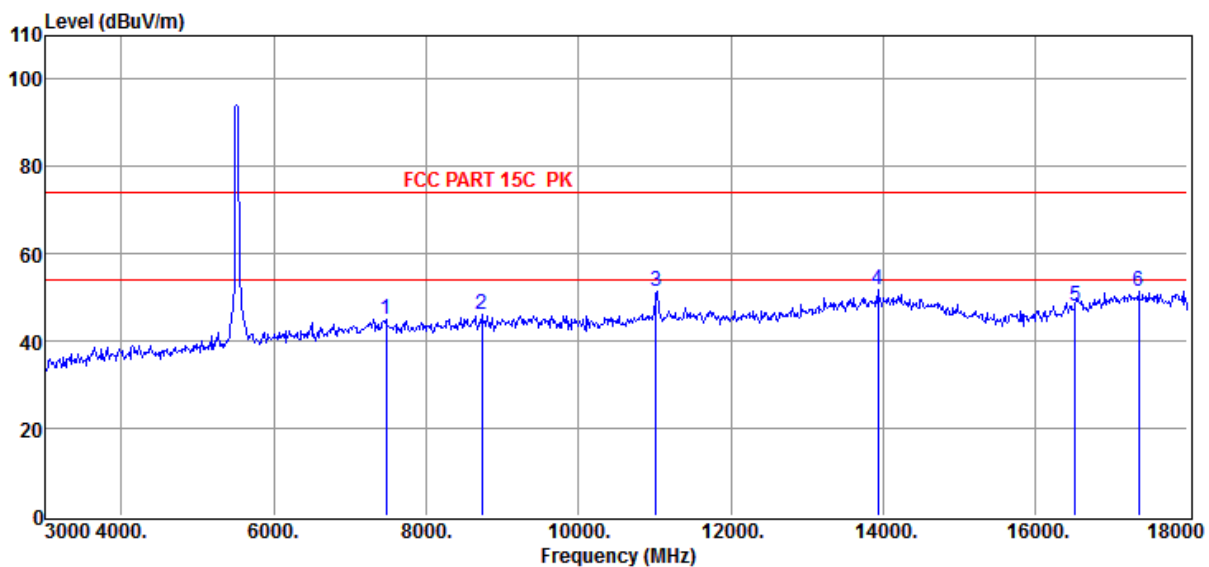

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7470.00	6.50	45.08	74.00	-28.92	186	159	Peak	HORIZONTAL
2	8730.00	6.66	46.01	74.00	-27.99	152	170	Peak	HORIZONTAL
3	11020.00	9.88	51.58	74.00	-22.42	165	164	Peak	HORIZONTAL
4	13935.00	12.73	51.89	74.00	-22.11	185	172	Peak	HORIZONTAL
5	16530.00	13.34	47.89	74.00	-26.11	180	163	Peak	HORIZONTAL
6	17355.00	15.70	51.29	74.00	-22.71	165	165	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5550MHz

Data: 180

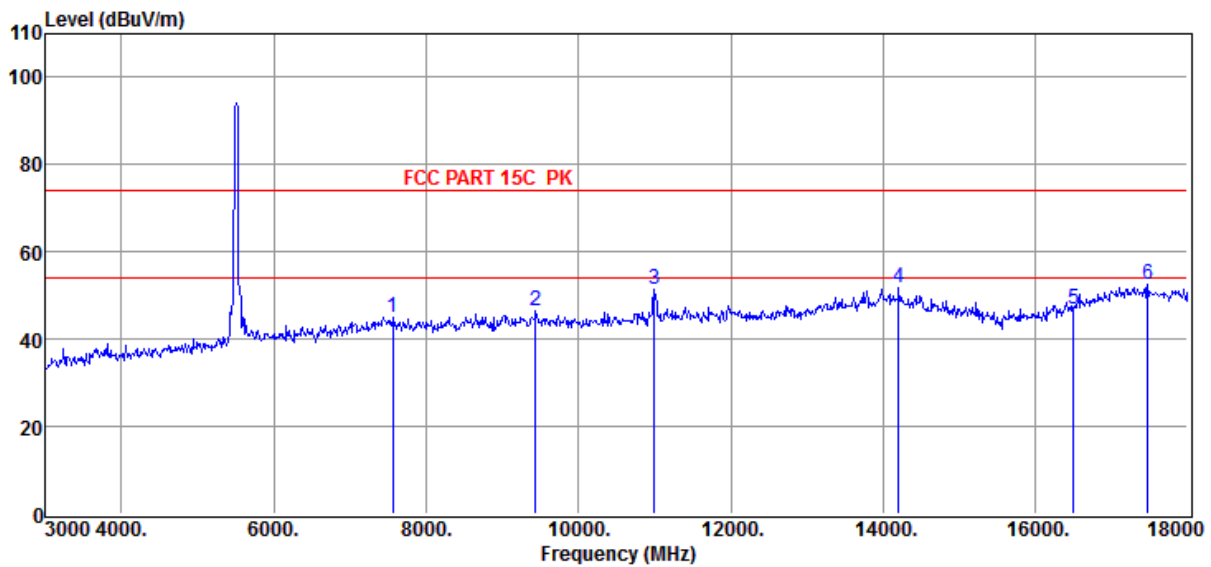

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7560.00	6.58	44.86	74.00	-29.14	166	177	Peak	HORIZONTAL
2	9435.00	8.05	46.58	74.00	-27.42	178	182	Peak	HORIZONTAL
3	11000.00	9.85	51.40	74.00	-22.60	174	183	Peak	HORIZONTAL
4	14205.00	14.01	51.81	74.00	-22.19	183	179	Peak	HORIZONTAL
5	16500.00	13.06	46.89	74.00	-27.11	150	183	Peak	HORIZONTAL
6	17475.00	15.60	52.51	74.00	-21.49	165	181	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5550MHz

Data: 181

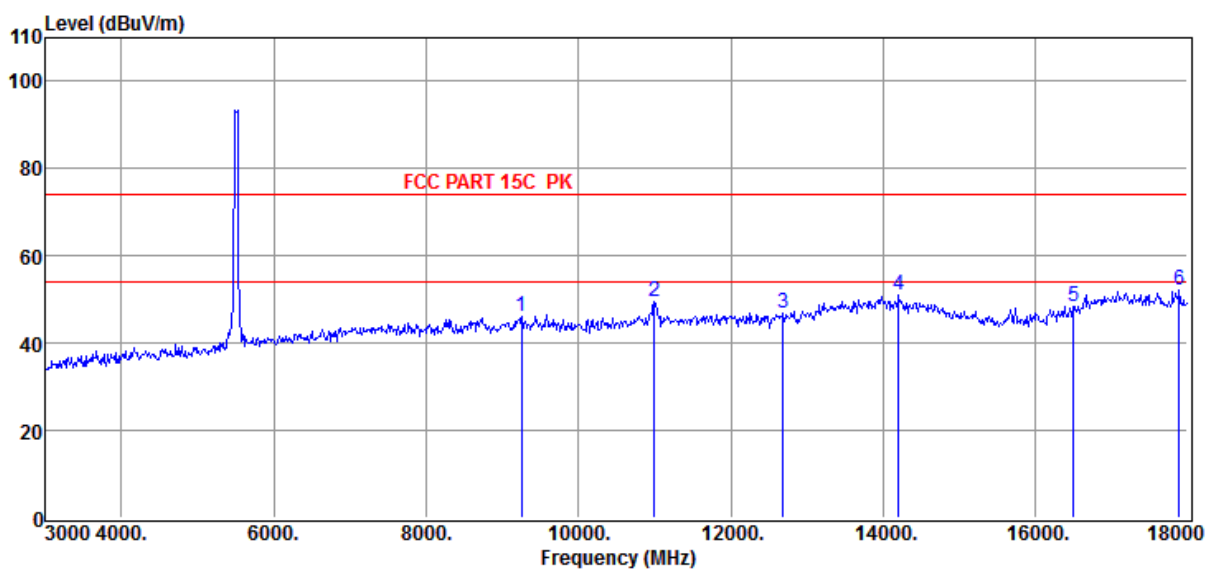

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	9255.00	7.49	46.22	74.00	-27.78	190	180	Peak	VERTICAL
2	11000.00	9.85	49.66	74.00	-24.34	164	184	Peak	VERTICAL
3	12690.00	9.87	46.89	74.00	-27.11	154	171	Peak	VERTICAL
4	14205.00	14.01	50.86	74.00	-23.14	160	155	Peak	VERTICAL
5	16500.00	13.06	48.36	74.00	-25.64	178	170	Peak	VERTICAL
6	17895.00	15.27	52.25	74.00	-21.75	154	189	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5670MHz

Data: 182

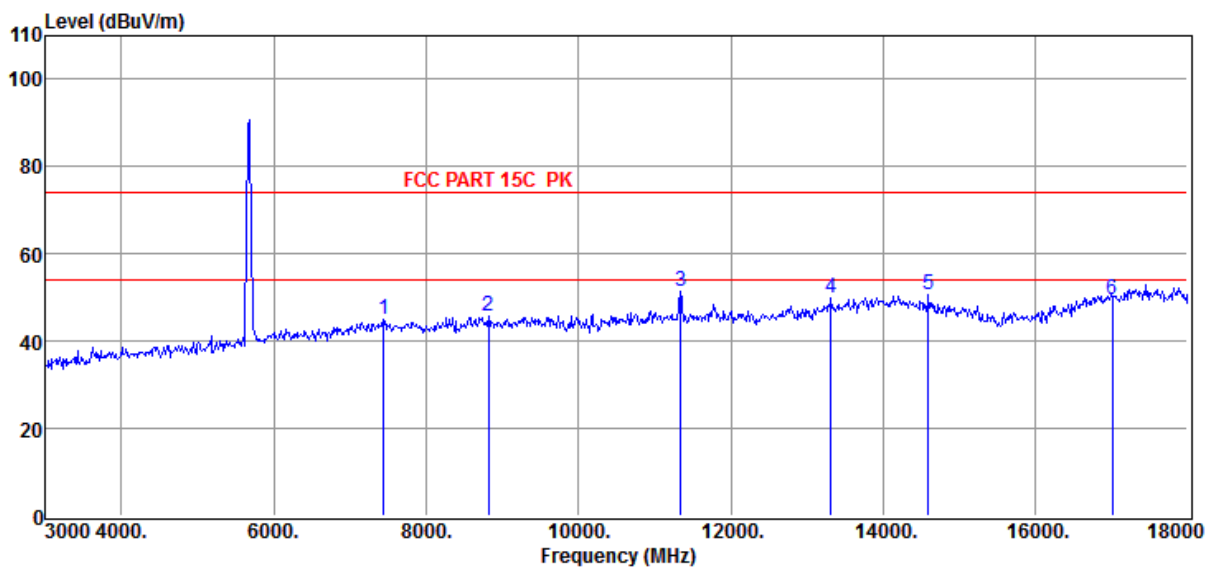

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7440.00	6.43	45.11	74.00	-28.89	171	162	Peak	VERTICAL
2	8820.00	6.63	45.79	74.00	-28.21	170	151	Peak	VERTICAL
3	11340.00	10.08	51.34	74.00	-22.66	152	168	Peak	VERTICAL
4	13320.00	10.91	49.71	74.00	-24.29	183	172	Peak	VERTICAL
5	14595.00	13.54	50.66	74.00	-23.34	158	182	Peak	VERTICAL
6	17010.00	16.24	49.49	74.00	-24.51	187	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5670MHz

Data: 183

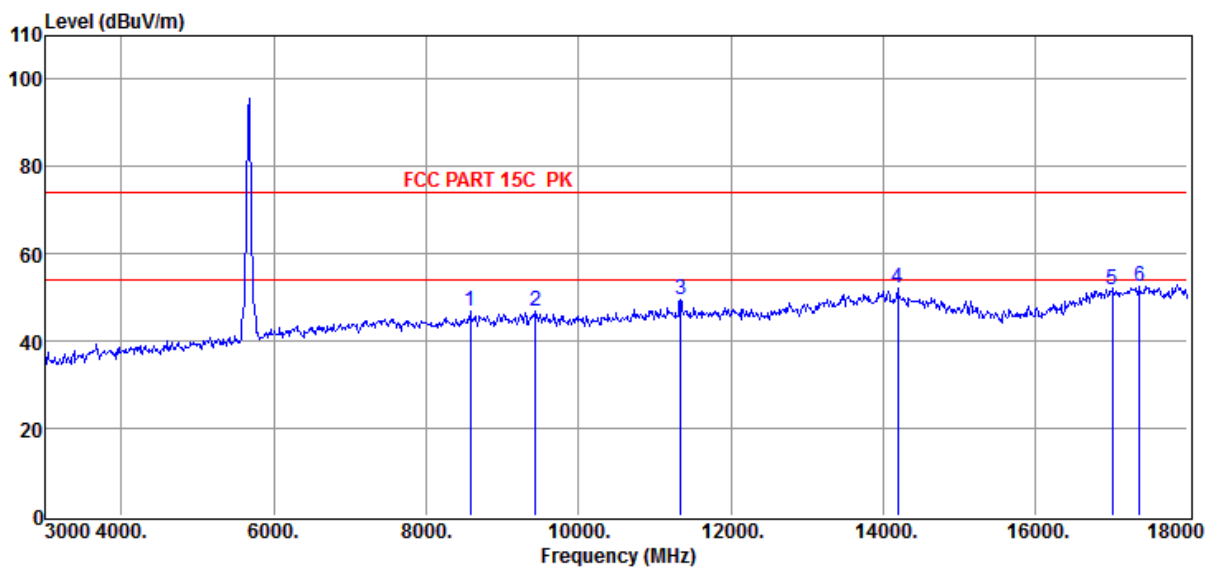

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8580.00	6.48	46.74	74.00	-27.26	189	186	Peak	HORIZONTAL
2	9435.00	8.05	46.82	74.00	-27.18	152	161	Peak	HORIZONTAL
3	11340.00	10.08	49.57	74.00	-24.43	166	152	Peak	HORIZONTAL
4	14190.00	13.97	52.29	74.00	-21.71	157	155	Peak	HORIZONTAL
5	17010.00	16.24	51.69	74.00	-22.31	173	173	Peak	HORIZONTAL
6	17370.00	15.66	52.53	74.00	-21.47	169	154	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHz

Data: 184

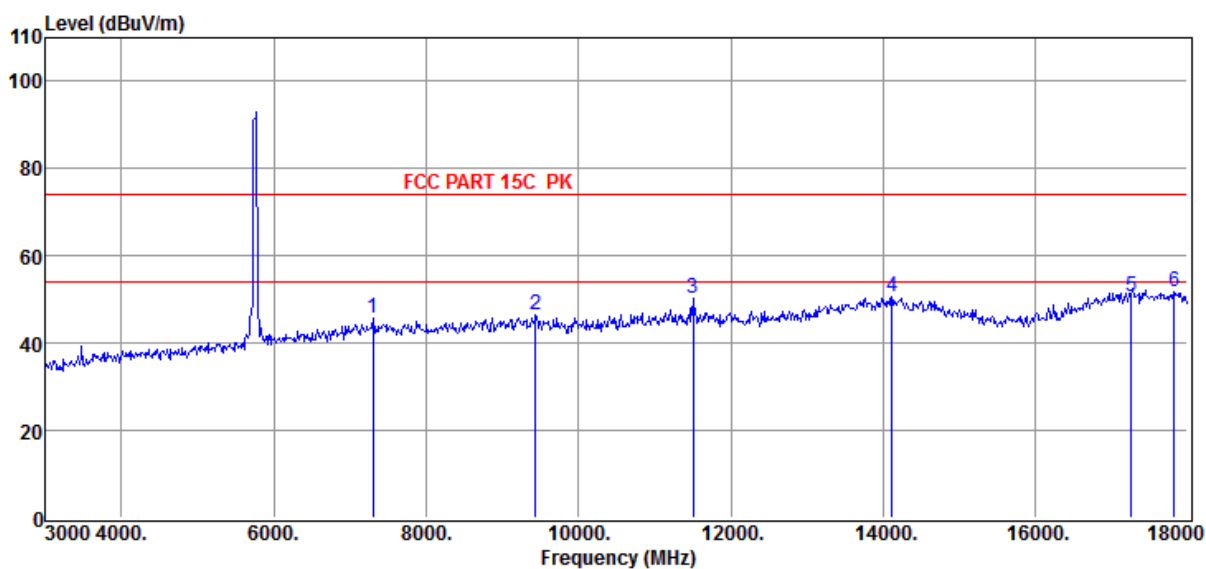

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7305.00	6.30	45.70	74.00	-28.30	162	180	Peak	HORIZONTAL
2	9435.00	8.05	46.41	74.00	-27.59	160	161	Peak	HORIZONTAL
3	11510.00	10.09	50.19	74.00	-23.81	162	185	Peak	HORIZONTAL
4	14115.00	13.22	50.74	74.00	-23.26	163	171	Peak	HORIZONTAL
5	17265.00	15.73	50.64	74.00	-23.36	174	172	Peak	HORIZONTAL
6	17820.00	15.29	51.78	74.00	-22.22	178	175	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHz

Data: 185

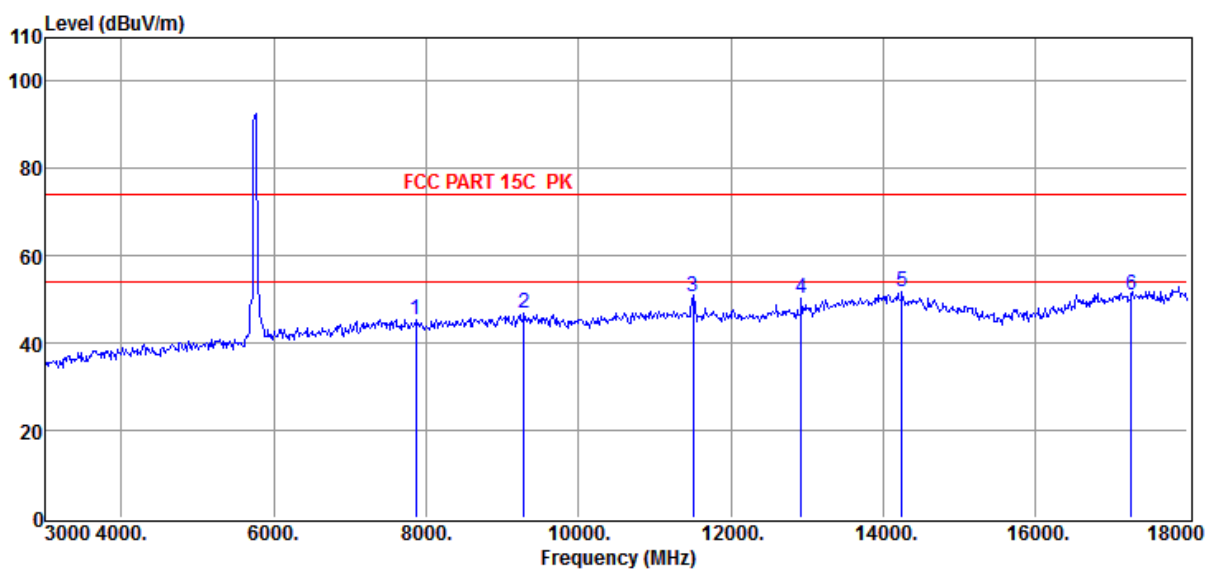

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7860.00	5.71	45.48	74.00	-28.52	180	184	Peak	VERTICAL
2	9285.00	7.61	46.89	74.00	-27.11	174	165	Peak	VERTICAL
3	11510.00	10.09	50.78	74.00	-23.22	151	166	Peak	VERTICAL
4	12930.00	10.04	50.20	74.00	-23.80	160	161	Peak	VERTICAL
5	14250.00	13.46	51.95	74.00	-22.05	184	168	Peak	VERTICAL
6	17265.00	15.73	51.00	74.00	-23.00	151	184	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 186

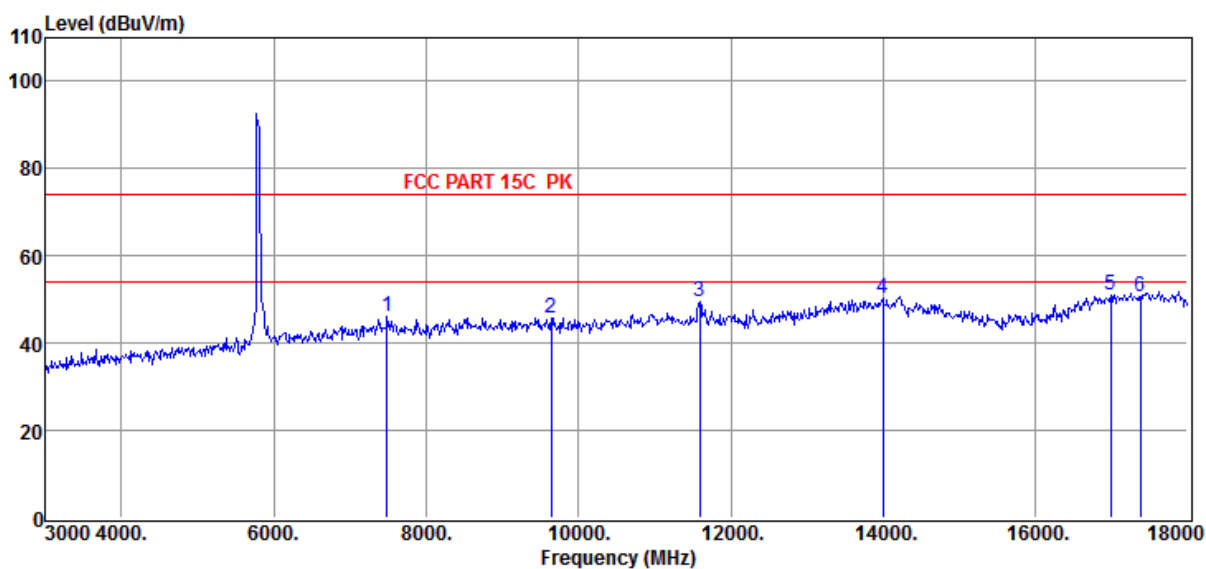

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7485.00	6.51	45.99	74.00	-28.01	153	150	Peak	VERTICAL
2	9645.00	8.08	45.86	74.00	-28.14	170	155	Peak	VERTICAL
3	11590.00	10.06	49.37	74.00	-24.63	169	164	Peak	VERTICAL
4	13995.00	12.98	50.22	74.00	-23.78	157	177	Peak	VERTICAL
5	16995.00	16.25	50.93	74.00	-23.07	186	151	Peak	VERTICAL
6	17385.00	15.63	50.80	74.00	-23.20	155	171	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 187

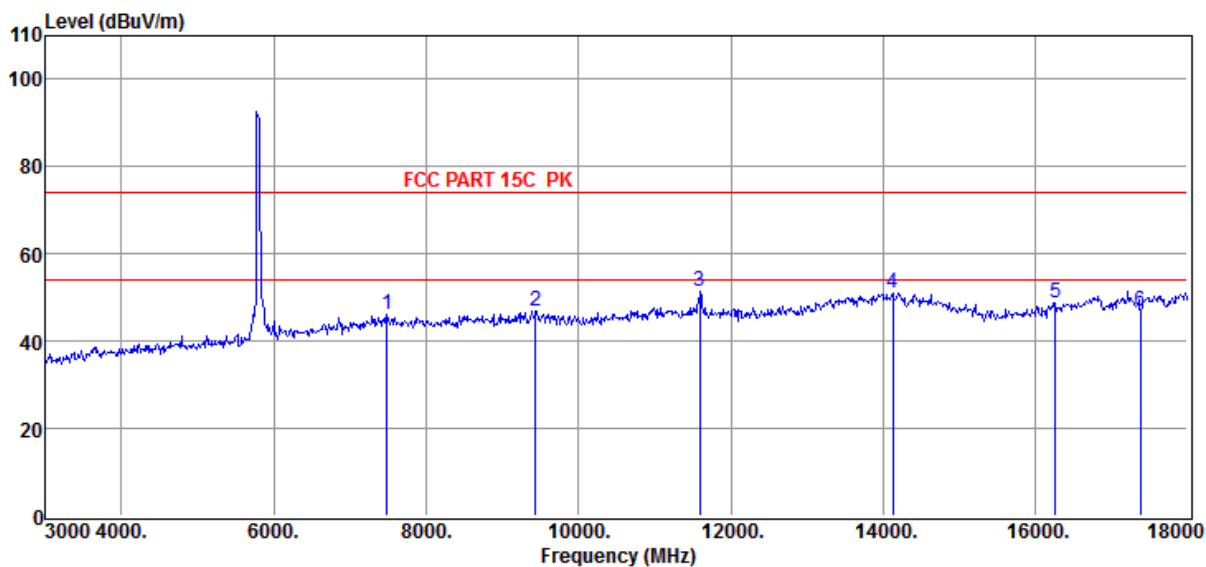

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7485.00	6.51	45.99	74.00	-28.01	172	167	Peak	VERTICAL
2	9435.00	8.05	46.87	74.00	-27.13	165	184	Peak	VERTICAL
3	11590.00	10.06	51.49	74.00	-22.51	171	181	Peak	VERTICAL
4	14130.00	13.37	51.01	74.00	-22.99	175	190	Peak	VERTICAL
5	16260.00	11.79	48.83	74.00	-25.17	174	180	Peak	VERTICAL
6	17385.00	15.63	46.96	74.00	-27.04	153	175	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHz

Data: 188

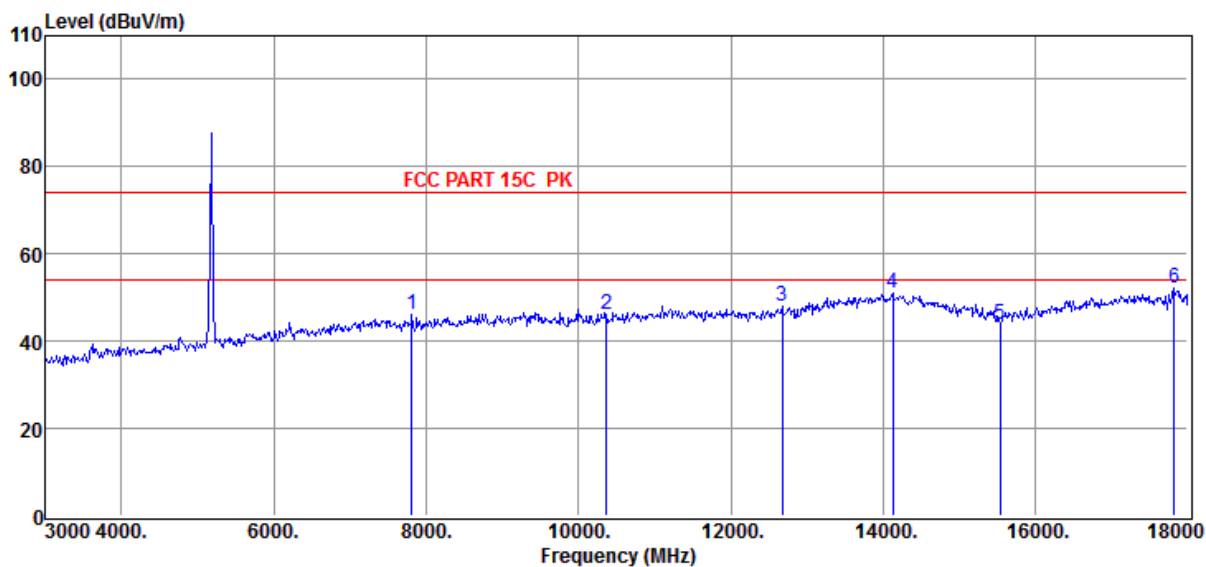

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7815.00	6.17	46.03	74.00	-27.97	158	176	Peak	VERTICAL
2	10365.00	8.77	46.26	74.00	-27.74	157	170	Peak	VERTICAL
3	12675.00	9.87	47.92	74.00	-26.08	176	167	Peak	VERTICAL
4	14130.00	13.37	51.17	74.00	-22.83	150	186	Peak	VERTICAL
5	15540.00	10.31	44.00	74.00	-30.00	181	168	Peak	VERTICAL
6	17820.00	15.29	52.13	74.00	-21.87	165	164	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHZ

Data: 189

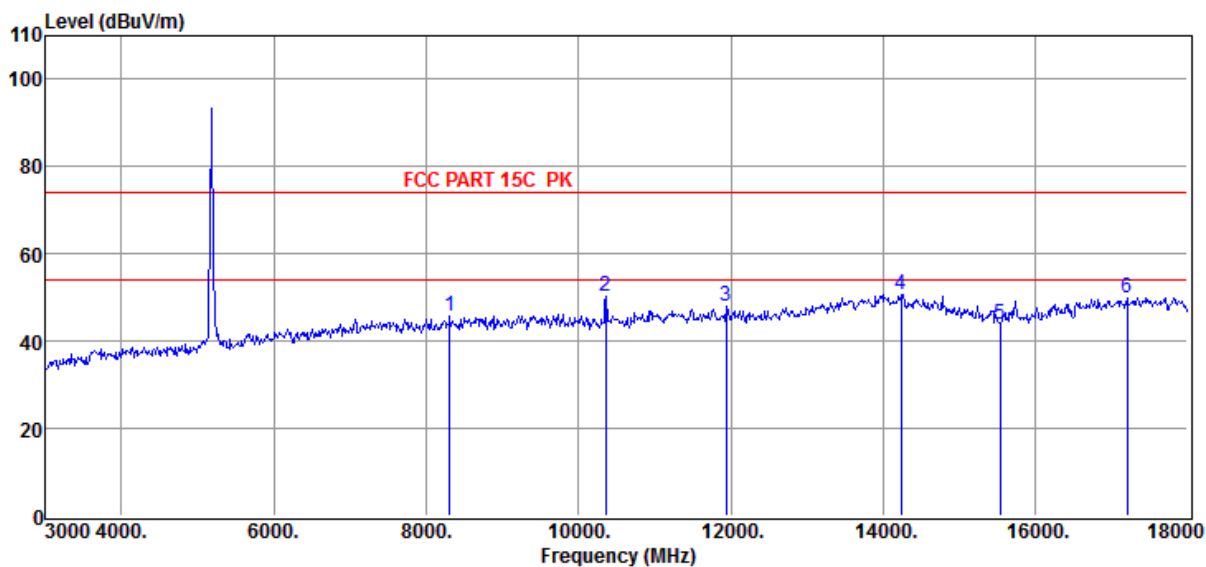

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8310.00	6.32	45.89	74.00	-28.11	170	173	Peak	HORIZONTAL
2	10360.00	8.75	50.32	74.00	-23.68	162	163	Peak	HORIZONTAL
3	11940.00	9.93	47.97	74.00	-26.03	155	182	Peak	HORIZONTAL
4	14235.00	13.64	50.60	74.00	-23.40	190	157	Peak	HORIZONTAL
5	15540.00	10.31	43.88	74.00	-30.12	172	184	Peak	HORIZONTAL
6	17205.00	15.57	49.73	74.00	-24.27	155	173	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5200MHZ

Data: 190

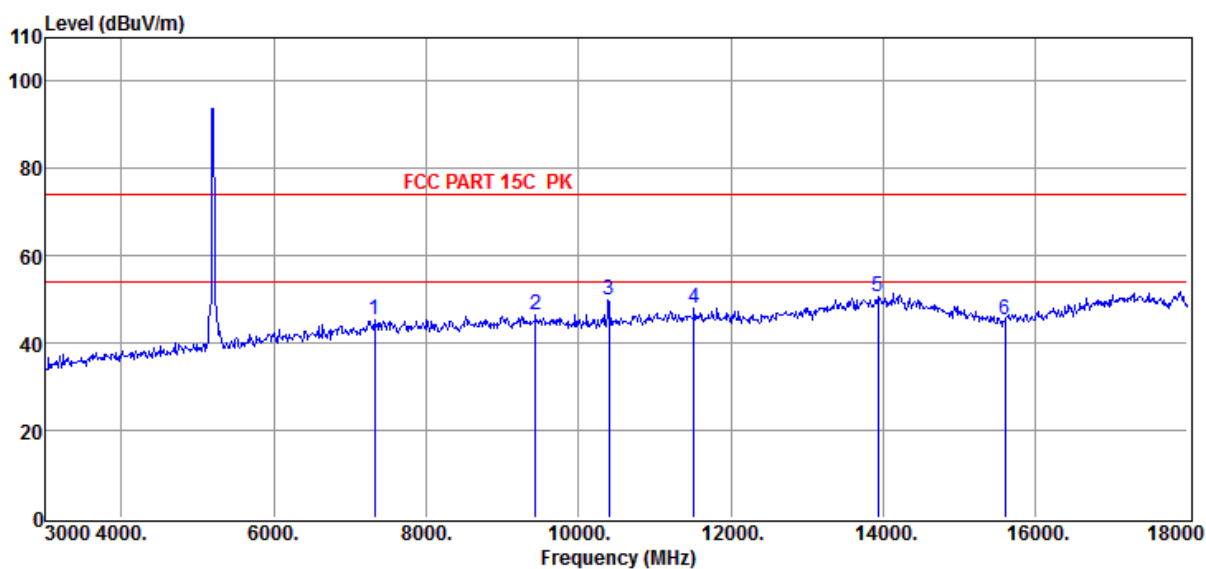

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7320.00	6.39	45.27	74.00	-28.73	170	180	Peak	HORIZONTAL
2	9435.00	8.05	46.49	74.00	-27.51	183	177	Peak	HORIZONTAL
3	10400.00	8.84	49.83	74.00	-24.17	186	154	Peak	HORIZONTAL
4	11520.00	10.09	48.06	74.00	-25.94	165	157	Peak	HORIZONTAL
5	13935.00	12.73	50.57	74.00	-23.43	163	174	Peak	HORIZONTAL
6	15600.00	10.22	45.36	74.00	-28.64	174	184	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5200MHZ

Data: 191

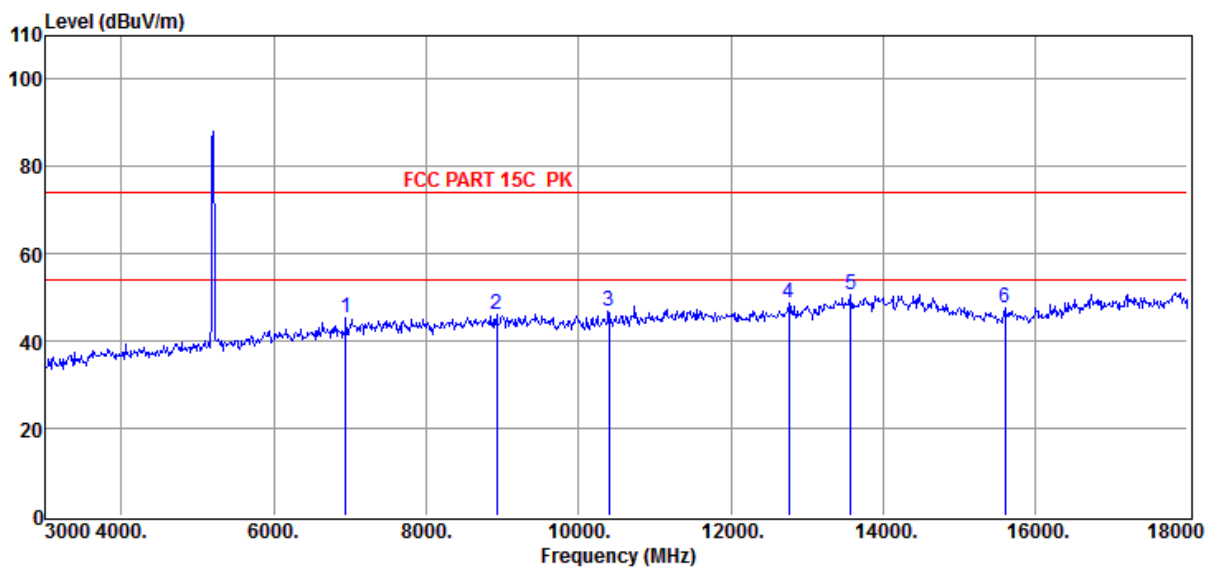

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6945.00	5.35	45.46	74.00	-28.54	168	180	Peak	VERTICAL
2	8925.00	6.62	45.99	74.00	-28.01	172	157	Peak	VERTICAL
3	10400.00	8.84	46.79	74.00	-27.21	175	158	Peak	VERTICAL
4	12765.00	9.71	48.58	74.00	-25.42	171	157	Peak	VERTICAL
5	13575.00	11.43	50.81	74.00	-23.19	154	164	Peak	VERTICAL
6	15600.00	10.22	47.78	74.00	-26.22	168	189	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5240MHz

Data: 192

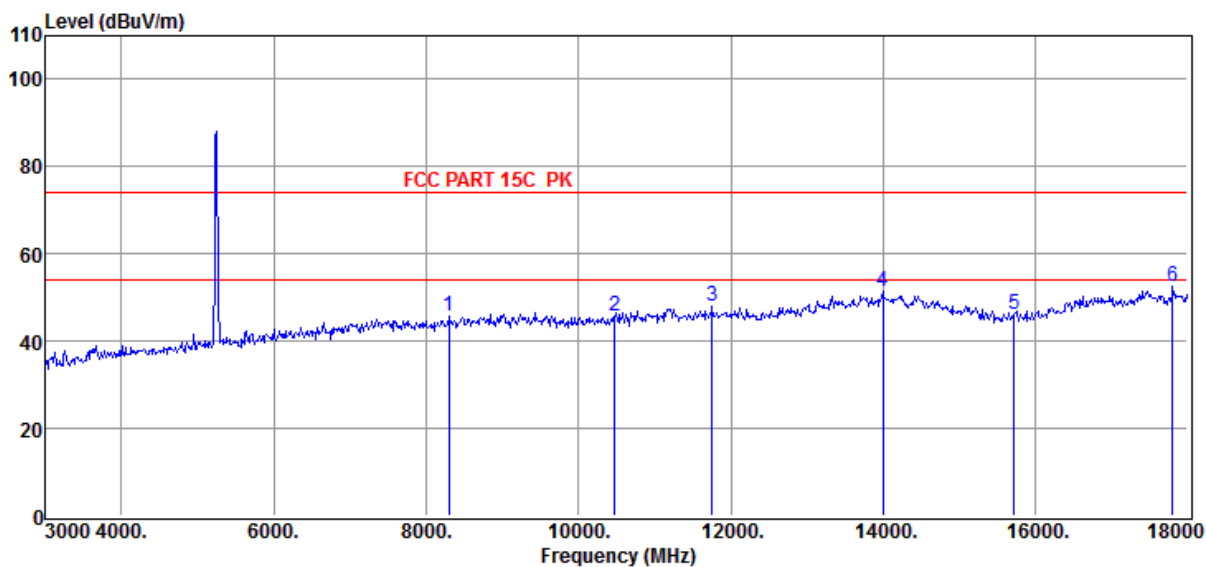

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8295.00	6.34	45.79	74.00	-28.21	150	152	Peak	VERTICAL
2	10480.00	8.91	45.91	74.00	-28.09	162	182	Peak	VERTICAL
3	11760.00	10.03	48.12	74.00	-25.88	157	172	Peak	VERTICAL
4	13995.00	12.98	51.29	74.00	-22.71	182	187	Peak	VERTICAL
5	15720.00	10.99	45.96	74.00	-28.04	177	180	Peak	VERTICAL
6	17805.00	15.30	52.41	74.00	-21.59	181	169	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5240MHz

Data: 193

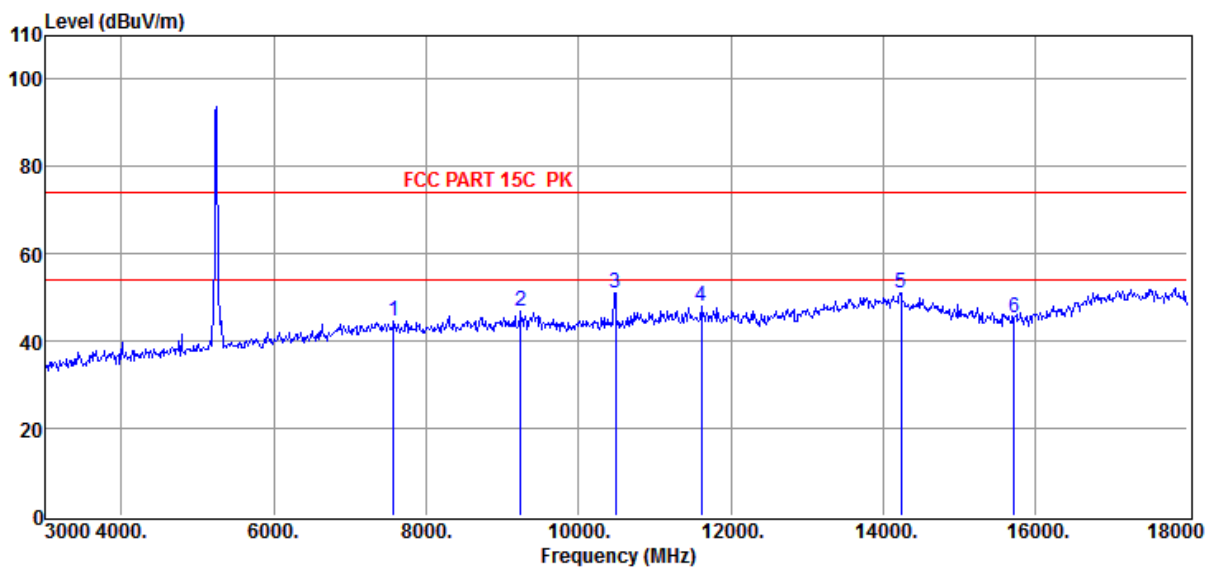

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	44.78	74.00	-29.22	170	160	Peak	HORIZONTAL
2	9240.00	7.43	46.72	74.00	-27.28	161	190	Peak	HORIZONTAL
3	10485.00	8.91	51.11	74.00	-22.89	185	157	Peak	HORIZONTAL
4	11610.00	10.06	48.01	74.00	-25.99	167	160	Peak	HORIZONTAL
5	14235.00	13.64	51.21	74.00	-22.79	150	188	Peak	HORIZONTAL
6	15720.00	10.99	45.22	74.00	-28.78	159	181	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5260MHZ

Data: 194

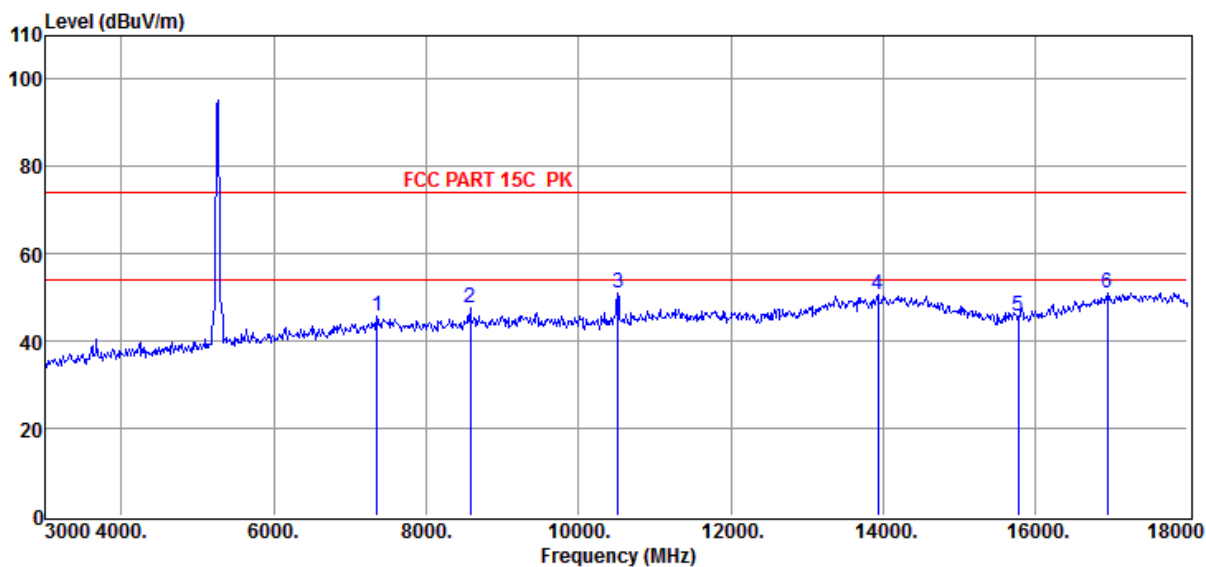

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7350.00	6.57	45.60	74.00	-28.40	166	157	Peak	HORIZONTAL
2	8580.00	6.48	47.61	74.00	-26.39	151	167	Peak	HORIZONTAL
3	10520.00	8.98	51.10	74.00	-22.90	169	190	Peak	HORIZONTAL
4	13935.00	12.73	50.76	74.00	-23.24	177	171	Peak	HORIZONTAL
5	15780.00	10.50	45.61	74.00	-28.39	173	190	Peak	HORIZONTAL
6	16950.00	15.60	51.01	74.00	-22.99	184	168	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5260MHz

Data: 195

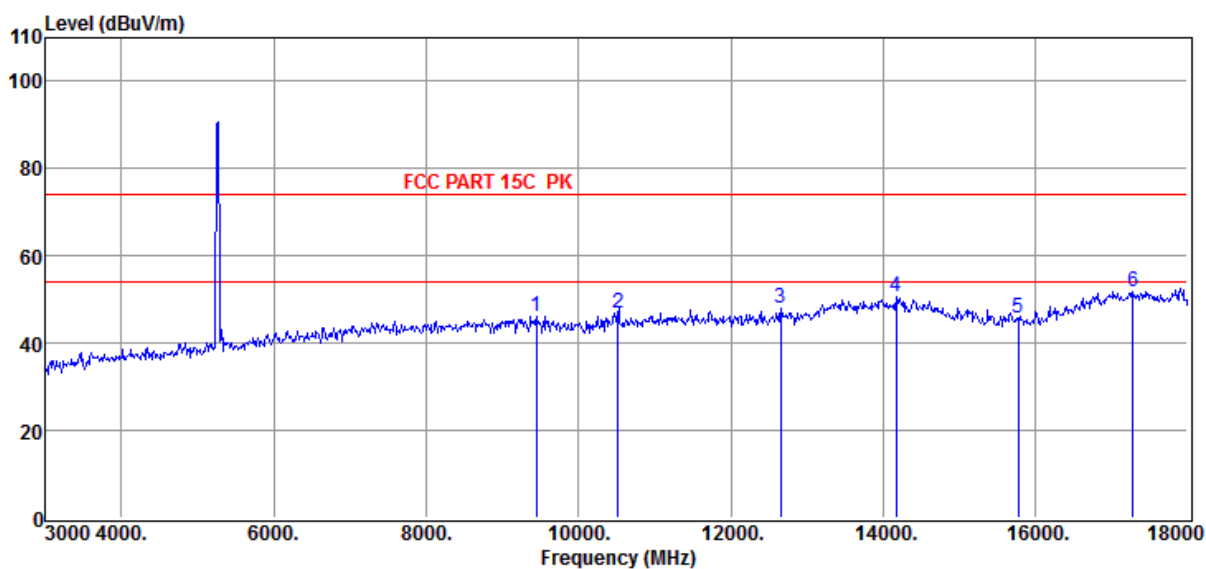

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	9450.00	7.98	46.11	74.00	-27.89	153	154	Peak	VERTICAL
2	10520.00	8.98	46.88	74.00	-27.12	151	150	Peak	VERTICAL
3	12660.00	9.86	48.06	74.00	-25.94	162	150	Peak	VERTICAL
4	14175.00	13.83	50.71	74.00	-23.29	172	172	Peak	VERTICAL
5	15780.00	10.50	45.86	74.00	-28.14	187	156	Peak	VERTICAL
6	17280.00	15.77	51.87	74.00	-22.13	180	163	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5280MHz

Data: 196

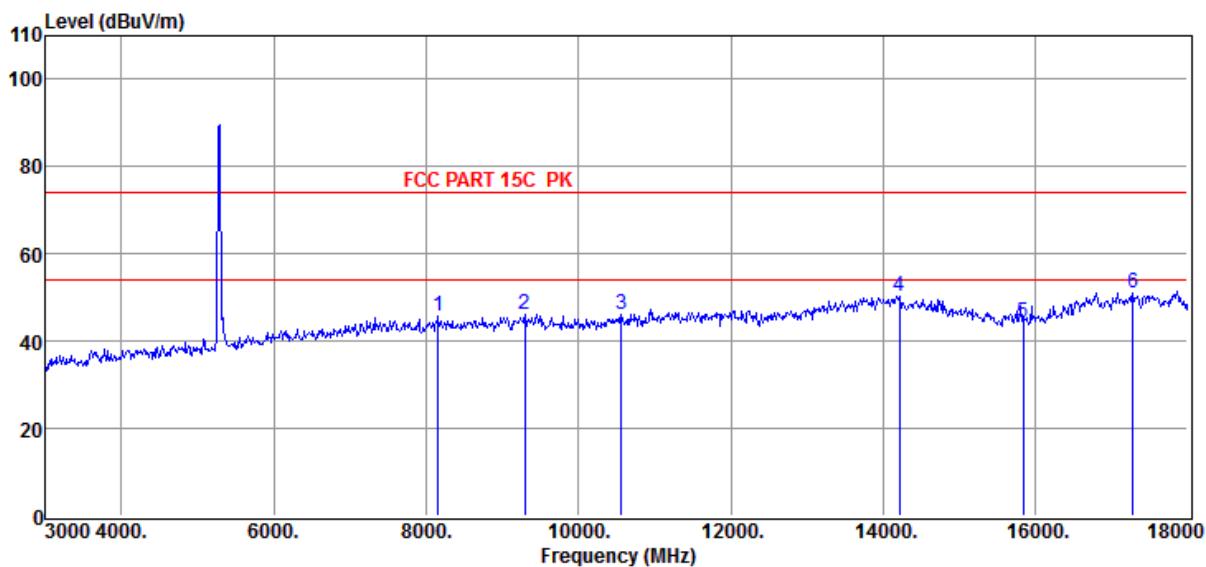

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8160.00	5.98	45.62	74.00	-28.38	184	175	Peak	VERTICAL
2	9300.00	7.67	46.01	74.00	-27.99	184	182	Peak	VERTICAL
3	10560.00	9.06	46.18	74.00	-27.82	154	187	Peak	VERTICAL
4	14220.00	13.82	50.11	74.00	-23.89	152	180	Peak	VERTICAL
5	15840.00	10.49	44.29	74.00	-29.71	181	167	Peak	VERTICAL
6	17280.00	15.77	51.21	74.00	-22.79	156	159	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5280MHZ

Data: 197

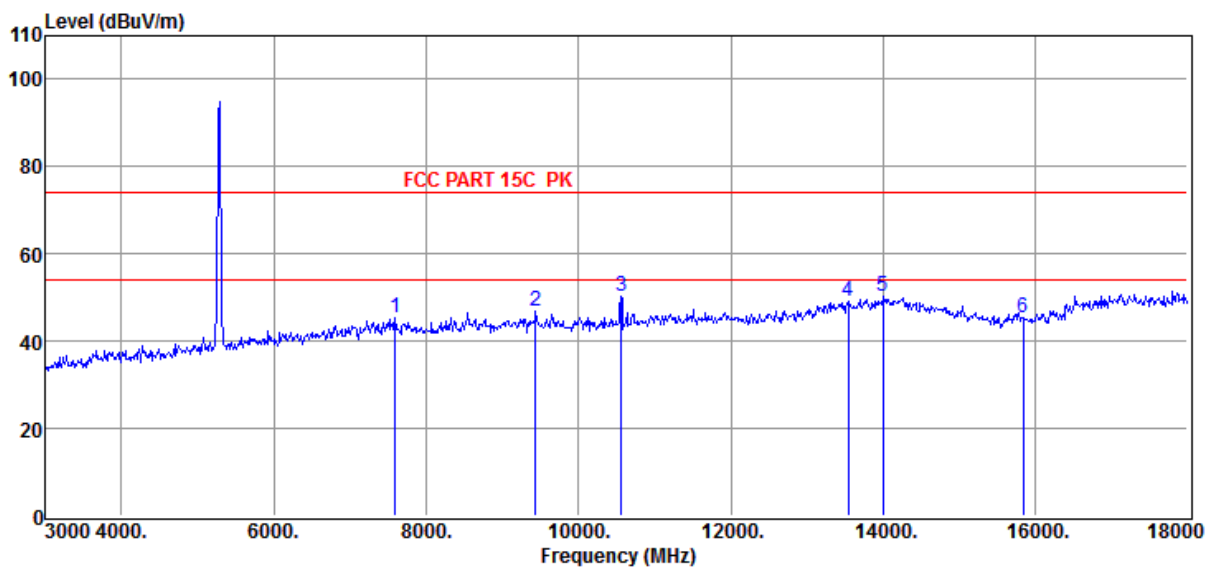

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.28	74.00	-28.72	160	170	Peak	HORIZONTAL
2	9435.00	8.05	46.71	74.00	-27.29	159	151	Peak	HORIZONTAL
3	10560.00	9.06	50.13	74.00	-23.87	168	164	Peak	HORIZONTAL
4	13545.00	11.39	49.04	74.00	-24.96	189	173	Peak	HORIZONTAL
5	13995.00	12.98	50.14	74.00	-23.86	157	180	Peak	HORIZONTAL
6	15840.00	10.49	45.18	74.00	-28.82	183	166	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5320MHZ

Data: 198

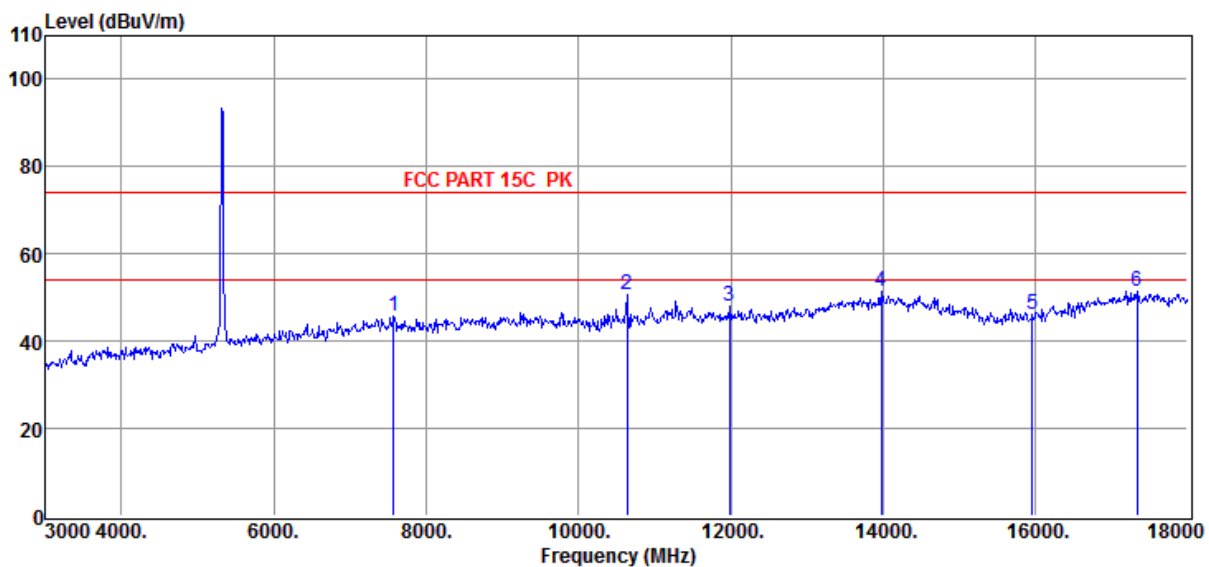

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	45.74	74.00	-28.26	184	188	Peak	HORIZONTAL
2	10640.00	9.14	50.61	74.00	-23.39	176	160	Peak	HORIZONTAL
3	11985.00	9.85	47.85	74.00	-26.15	167	175	Peak	HORIZONTAL
4	13980.00	12.92	51.25	74.00	-22.75	185	182	Peak	HORIZONTAL
5	15960.00	10.72	46.12	74.00	-27.88	187	174	Peak	HORIZONTAL
6	17340.00	15.74	51.39	74.00	-22.61	181	151	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5320MHZ

Data: 199

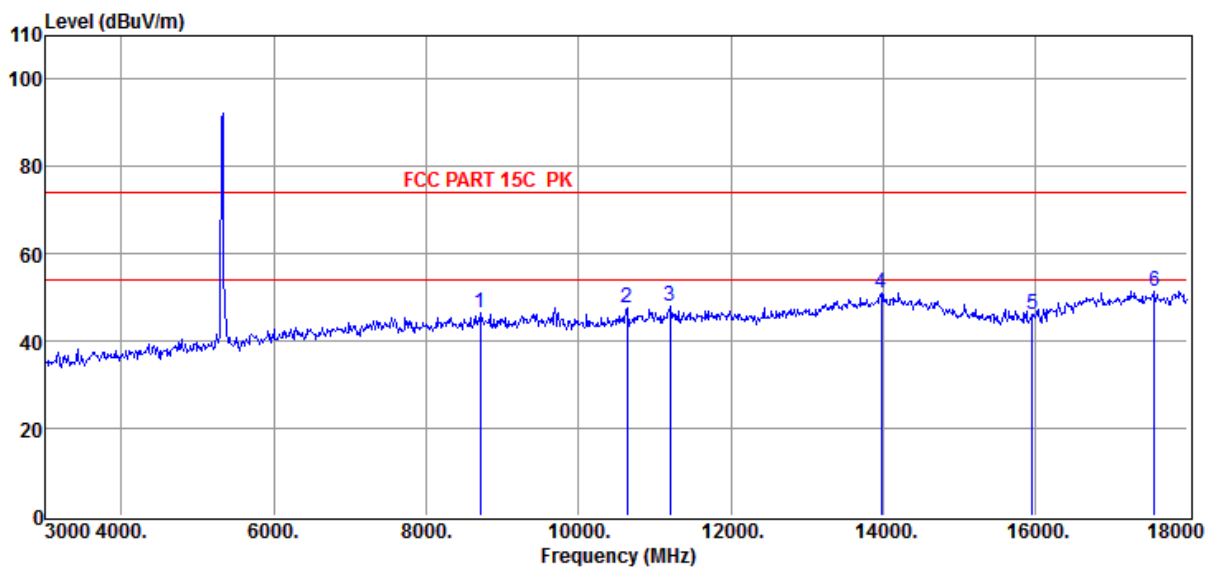

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8715.00	6.66	46.32	74.00	-27.68	157	185	Peak	VERTICAL
2	10635.00	9.14	47.54	74.00	-26.46	177	173	Peak	VERTICAL
3	11205.00	10.38	48.04	74.00	-25.96	163	154	Peak	VERTICAL
4	13980.00	12.92	50.98	74.00	-23.02	164	178	Peak	VERTICAL
5	15960.00	10.72	46.20	74.00	-27.80	174	181	Peak	VERTICAL
6	17565.00	15.48	51.55	74.00	-22.45	159	155	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHz

Data: 200

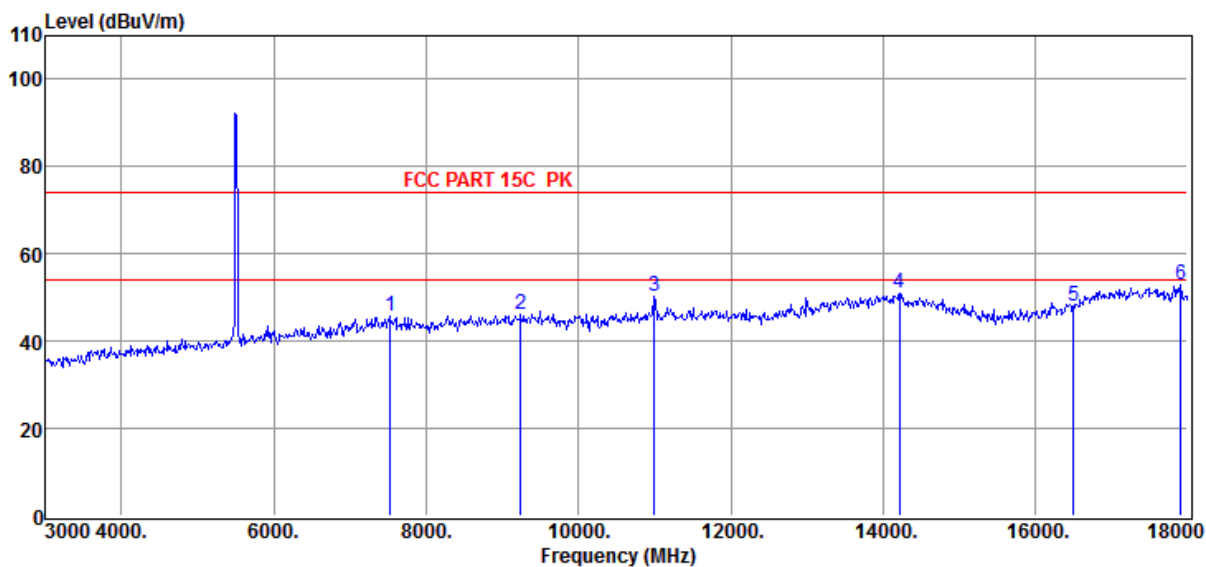

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7530.00	6.59	45.90	74.00	-28.10	170	180	Peak	VERTICAL
2	9240.00	7.43	46.07	74.00	-27.93	163	162	Peak	VERTICAL
3	11000.00	9.85	50.45	74.00	-23.55	164	158	Peak	VERTICAL
4	14220.00	13.82	51.13	74.00	-22.87	166	160	Peak	VERTICAL
5	16500.00	13.06	48.11	74.00	-25.89	163	176	Peak	VERTICAL
6	17910.00	15.19	52.80	74.00	-21.20	159	175	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHZ

Data: 201

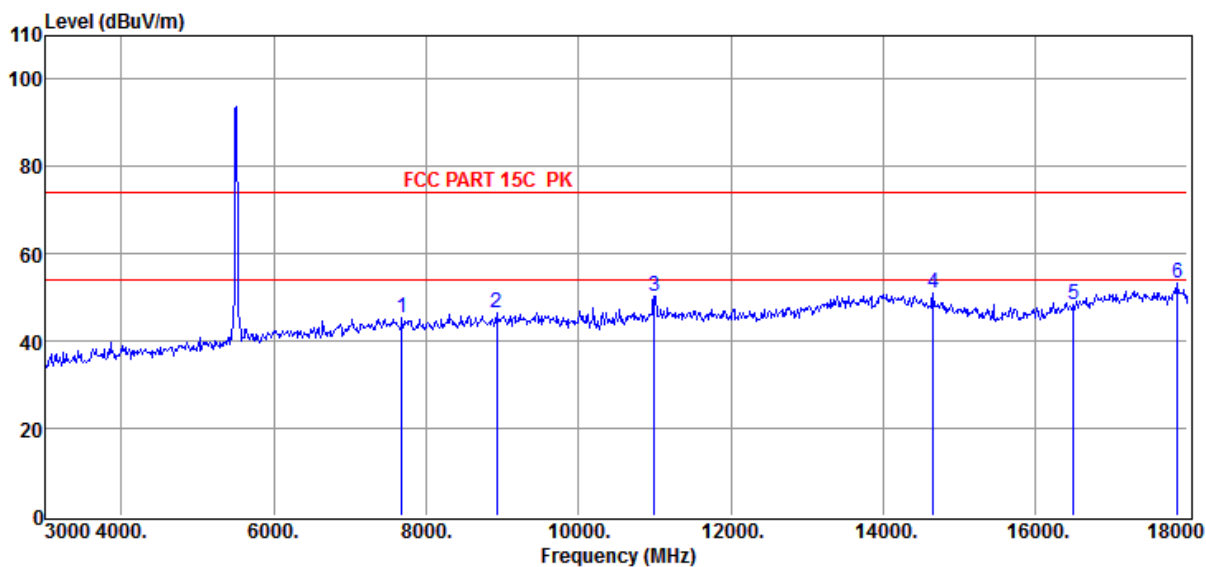

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7680.00	5.92	45.34	74.00	-28.66	158	153	Peak	HORIZONTAL
2	8925.00	6.62	46.56	74.00	-27.44	187	185	Peak	HORIZONTAL
3	11000.00	9.85	50.30	74.00	-23.70	181	175	Peak	HORIZONTAL
4	14655.00	12.97	51.11	74.00	-22.89	162	178	Peak	HORIZONTAL
5	16500.00	13.06	48.38	74.00	-25.62	158	183	Peak	HORIZONTAL
6	17865.00	15.28	53.14	74.00	-20.86	165	159	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5580MHz

Data: 202

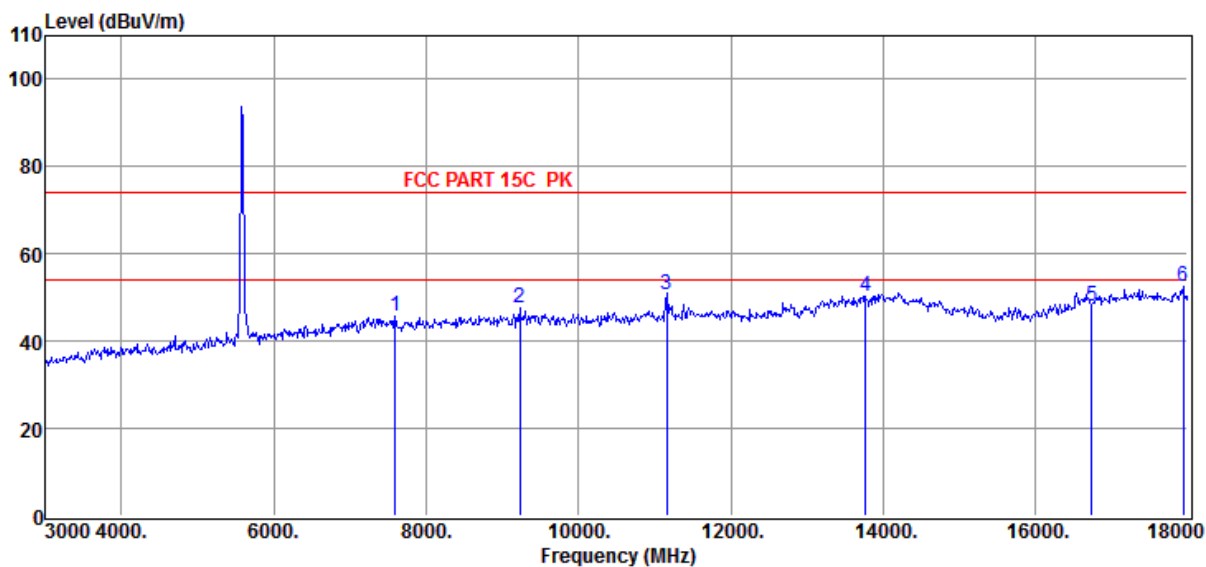

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.63	74.00	-28.37	187	184	Peak	HORIZONTAL
2	9225.00	7.37	47.74	74.00	-26.26	189	176	Peak	HORIZONTAL
3	11160.00	10.24	50.69	74.00	-23.31	170	188	Peak	HORIZONTAL
4	13770.00	11.98	50.42	74.00	-23.58	186	178	Peak	HORIZONTAL
5	16740.00	14.70	48.09	74.00	-25.91	173	157	Peak	HORIZONTAL
6	17940.00	14.95	52.41	74.00	-21.59	173	178	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5580MHz

Data: 203

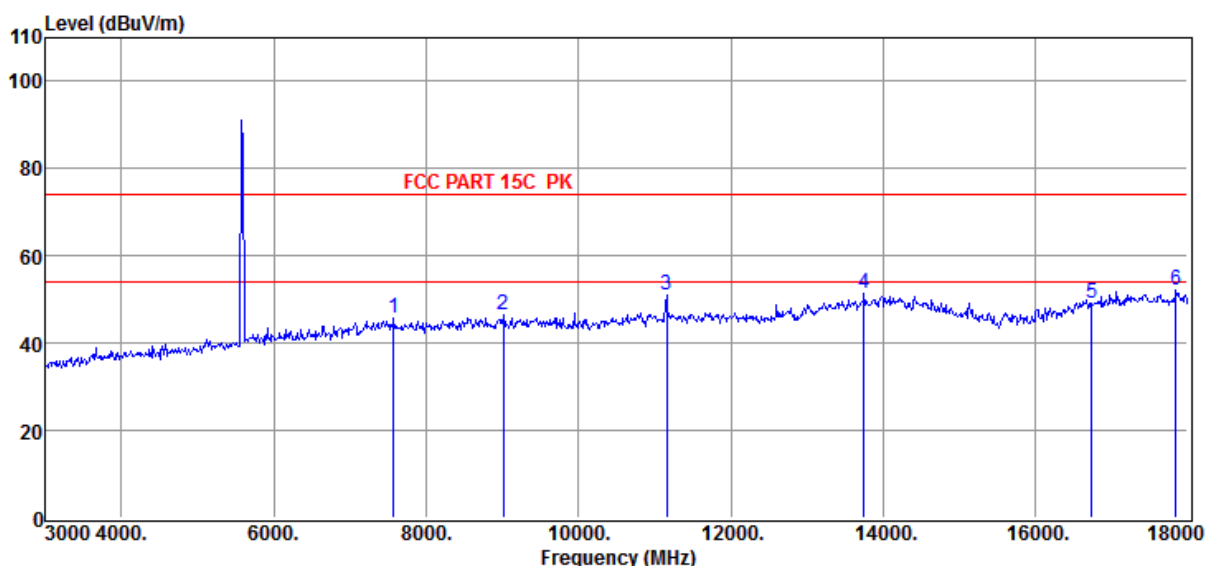

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	45.78	74.00	-28.22	184	180	Peak	VERTICAL
2	9015.00	7.16	46.35	74.00	-27.65	152	174	Peak	VERTICAL
3	11160.00	10.24	51.00	74.00	-23.00	174	153	Peak	VERTICAL
4	13755.00	11.96	51.34	74.00	-22.66	151	187	Peak	VERTICAL
5	16740.00	14.70	49.00	74.00	-25.00	179	168	Peak	VERTICAL
6	17850.00	15.29	52.32	74.00	-21.68	162	158	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5700MHz

Data: 204

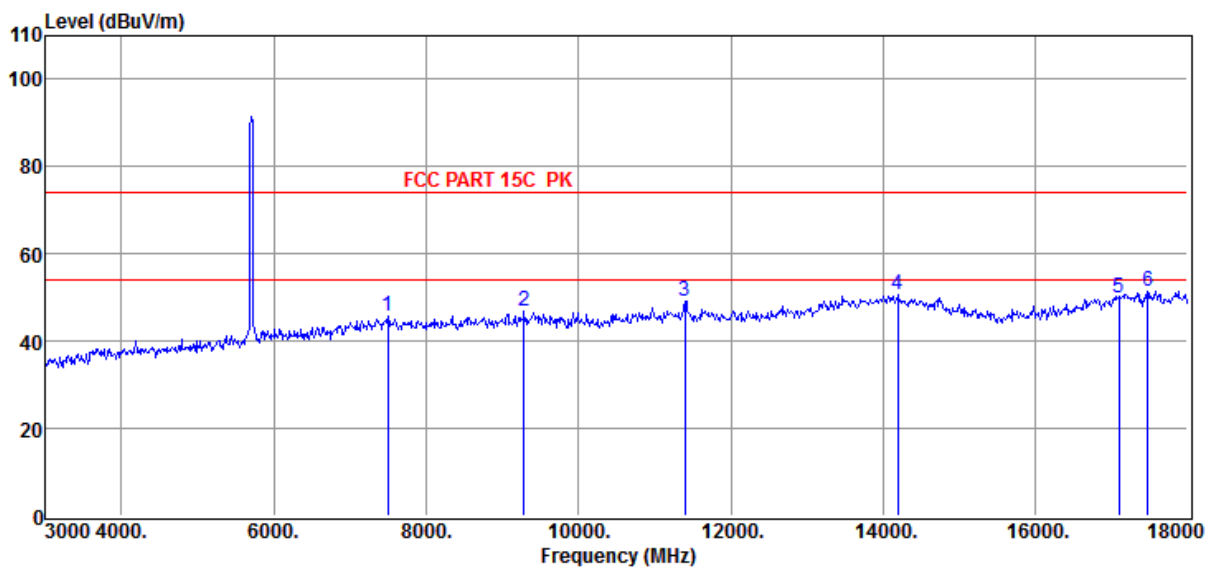

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7500.00	6.50	45.57	74.00	-28.43	152	163	Peak	VERTICAL
2	9285.00	7.61	46.69	74.00	-27.31	188	182	Peak	VERTICAL
3	11400.00	10.06	49.18	74.00	-24.82	180	156	Peak	VERTICAL
4	14190.00	13.97	50.58	74.00	-23.42	167	167	Peak	VERTICAL
5	17100.00	15.56	49.93	74.00	-24.07	153	168	Peak	VERTICAL
6	17475.00	15.60	51.50	74.00	-22.50	183	176	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5700MHZ

Data: 205

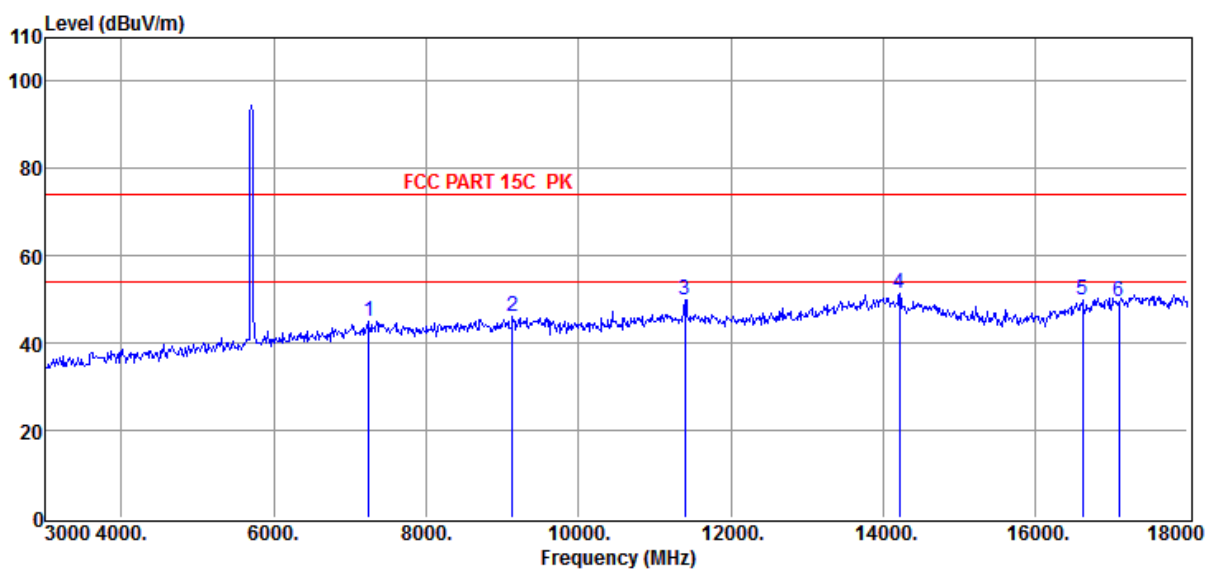

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7245.00	6.33	45.00	74.00	-29.00	182	175	Peak	HORIZONTAL
2	9135.00	7.13	46.00	74.00	-28.00	173	182	Peak	HORIZONTAL
3	11400.00	10.06	50.08	74.00	-23.92	181	183	Peak	HORIZONTAL
4	14220.00	13.82	51.23	74.00	-22.77	150	187	Peak	HORIZONTAL
5	16620.00	14.05	50.02	74.00	-23.98	160	179	Peak	HORIZONTAL
6	17100.00	15.56	49.37	74.00	-24.63	159	180	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5745MHz

Data: 206

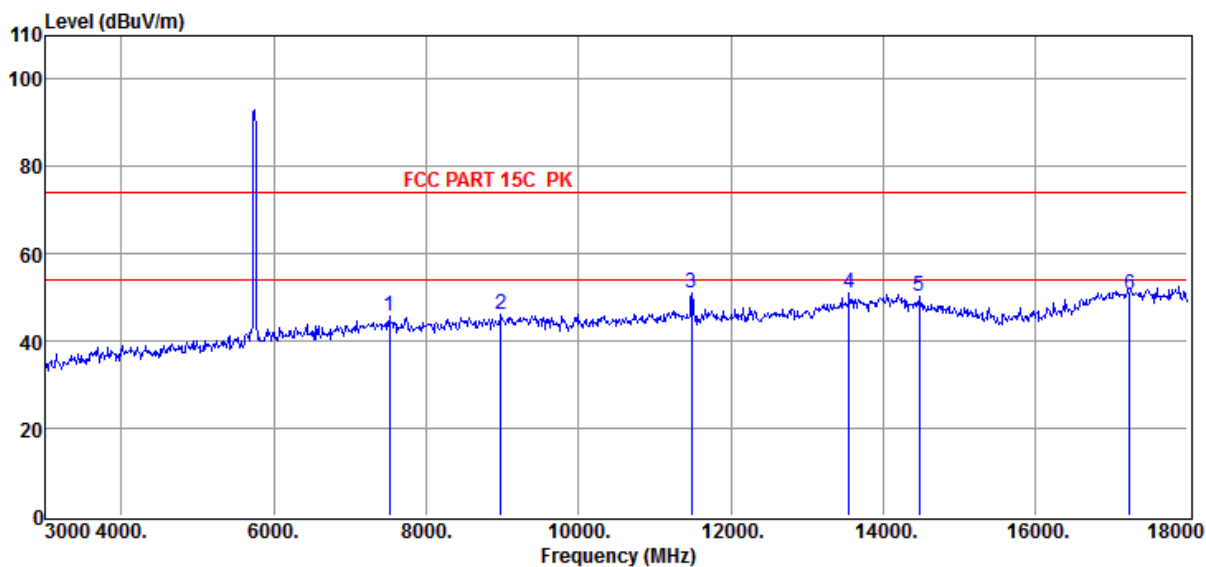

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7515.00	6.54	45.56	74.00	-28.44	155	Peak	Peak	HORIZONTAL
2	8985.00	7.07	46.11	74.00	-27.89	178	Peak	Peak	HORIZONTAL
3	11490.00	10.09	51.19	74.00	-22.81	155	Peak	Peak	HORIZONTAL
4	13560.00	11.41	50.84	74.00	-23.16	186	Peak	Peak	HORIZONTAL
5	14475.00	13.09	50.15	74.00	-23.85	152	Peak	Peak	HORIZONTAL
6	17235.00	15.65	50.58	74.00	-23.42	187	Peak	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5745MHz

Data: 207

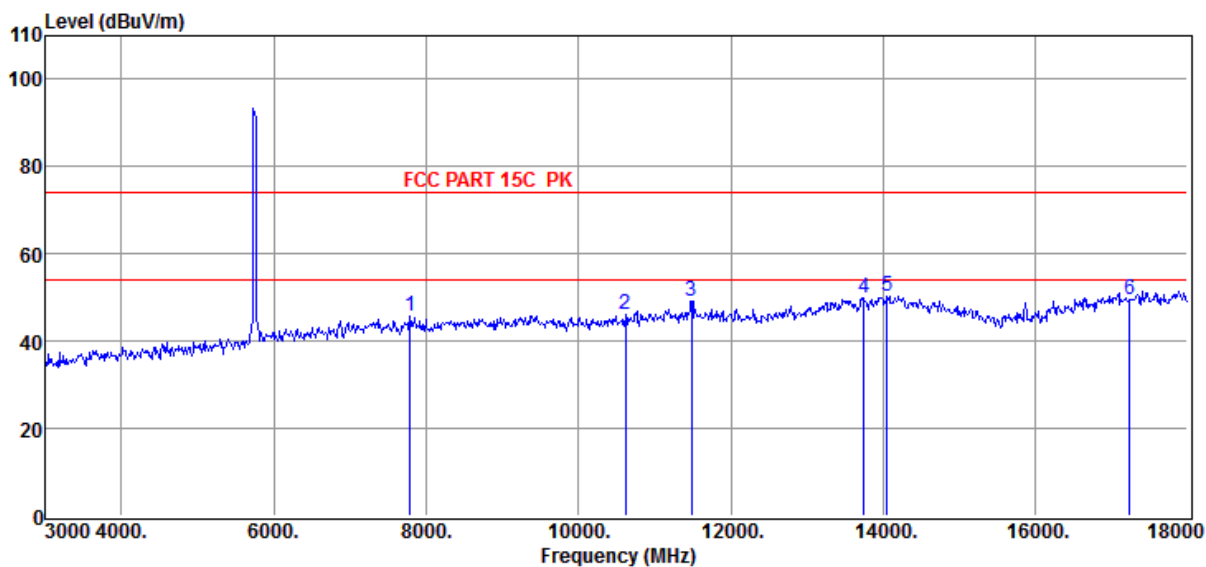

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7785.00	6.29	45.82	74.00	-28.18	167	Peak	Peak	VERTICAL
2	10620.00	9.15	46.22	74.00	-27.78	158	Peak	Peak	VERTICAL
3	11490.00	10.09	49.23	74.00	-24.77	190	Peak	Peak	VERTICAL
4	13755.00	11.96	50.05	74.00	-23.95	161	Peak	Peak	VERTICAL
5	14055.00	13.04	50.45	74.00	-23.55	159	Peak	Peak	VERTICAL
6	17235.00	15.65	49.37	74.00	-24.63	189	Peak	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5785MHz

Data: 208

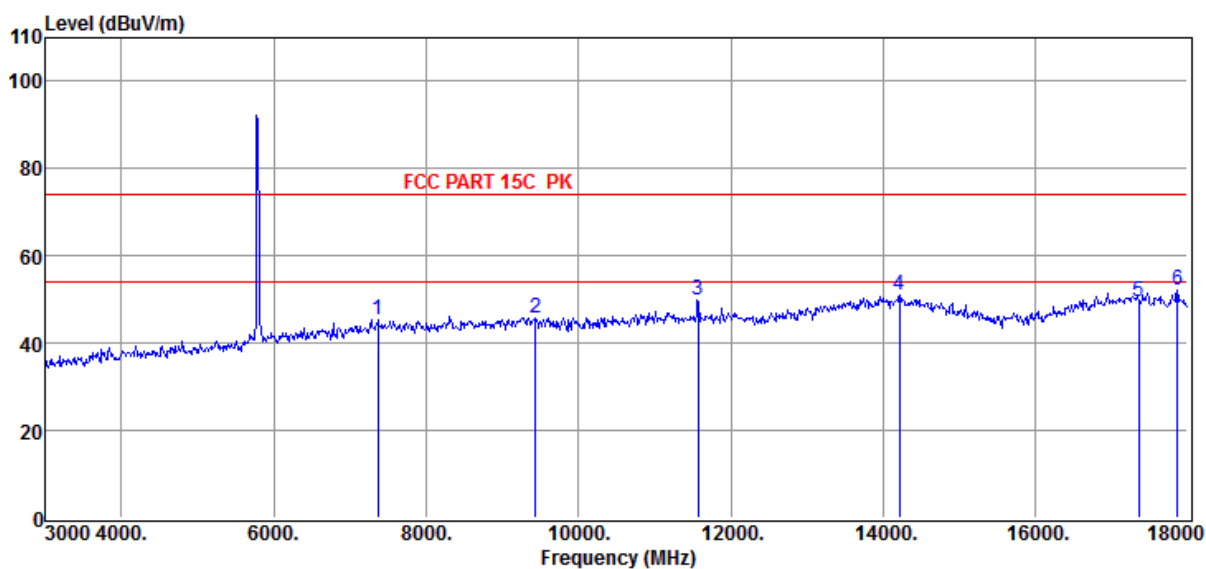

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	45.32	74.00	-28.68	176	151	Peak	VERTICAL
2	9435.00	8.05	45.92	74.00	-28.08	159	173	Peak	VERTICAL
3	11570.00	10.07	49.84	74.00	-24.16	157	181	Peak	VERTICAL
4	14220.00	13.82	51.17	74.00	-22.83	171	156	Peak	VERTICAL
5	17355.00	15.70	49.53	74.00	-24.47	169	190	Peak	VERTICAL
6	17865.00	15.28	52.31	74.00	-21.69	156	187	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5785MHz

Data: 209

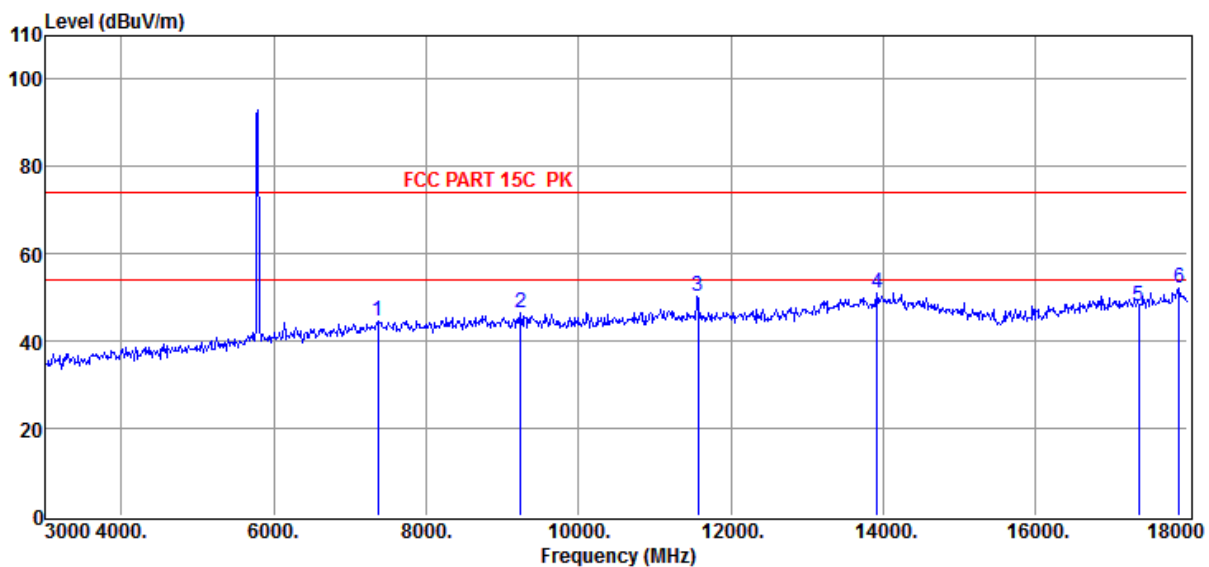

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	44.58	74.00	-29.42	170	159	Peak	HORIZONTAL
2	9240.00	7.43	46.62	74.00	-27.38	185	173	Peak	HORIZONTAL
3	11570.00	10.07	50.26	74.00	-23.74	190	180	Peak	HORIZONTAL
4	13920.00	12.66	50.85	74.00	-23.15	178	153	Peak	HORIZONTAL
5	17355.00	15.70	48.09	74.00	-25.91	163	167	Peak	HORIZONTAL
6	17895.00	15.27	52.18	74.00	-21.82	179	153	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHz

Data: 210

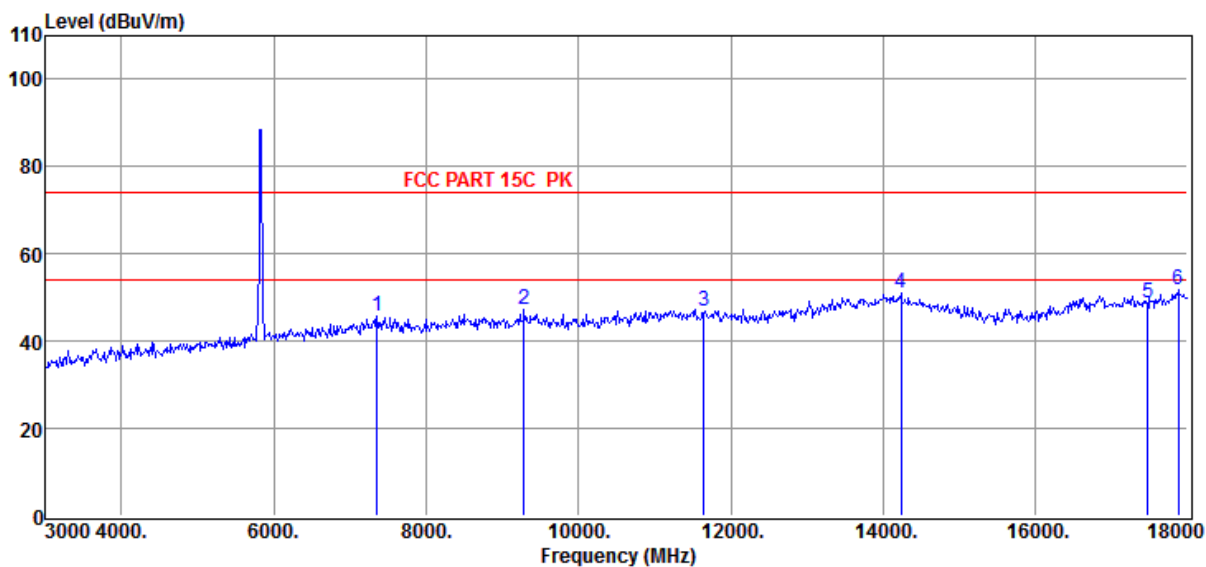

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7350.00	6.57	45.75	74.00	-28.25	171	172	Peak	HORIZONTAL
2	9285.00	7.61	47.19	74.00	-26.81	186	166	Peak	HORIZONTAL
3	11650.00	10.05	46.81	74.00	-27.19	150	159	Peak	HORIZONTAL
4	14235.00	13.64	51.10	74.00	-22.90	181	175	Peak	HORIZONTAL
5	17475.00	15.60	48.90	74.00	-25.10	173	183	Peak	HORIZONTAL
6	17880.00	15.28	51.63	74.00	-22.37	151	164	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHz

Data: 211

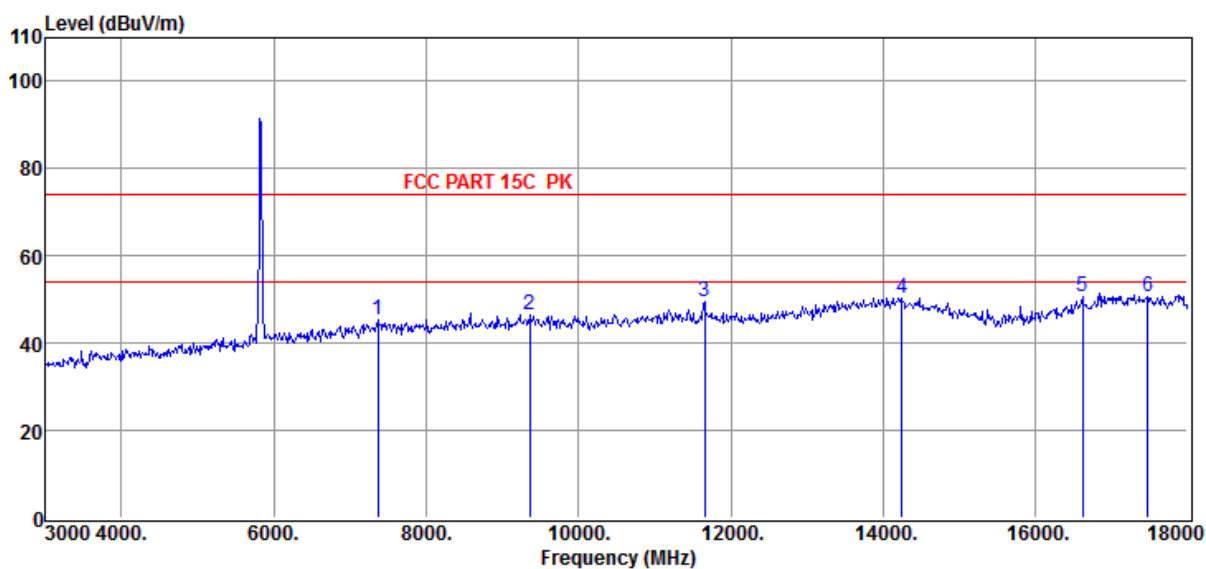

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	45.28	74.00	-28.72	154	182	Peak	VERTICAL
2	9360.00	7.99	46.35	74.00	-27.65	165	182	Peak	VERTICAL
3	11655.00	10.04	49.65	74.00	-24.35	152	169	Peak	VERTICAL
4	14250.00	13.46	50.43	74.00	-23.57	158	190	Peak	VERTICAL
5	16620.00	14.05	50.58	74.00	-23.42	174	165	Peak	VERTICAL
6	17475.00	15.60	50.68	74.00	-23.32	186	166	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHz

Data: 212

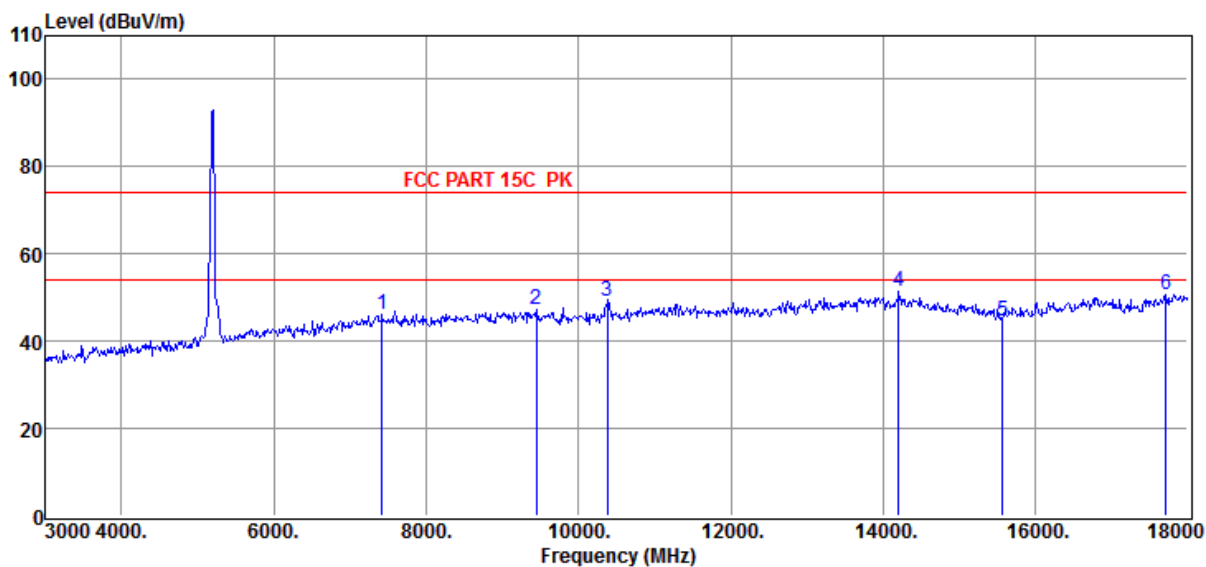

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7425.00	6.31	46.21	74.00	-27.79	181	157	Peak	VERTICAL
2	9450.00	7.98	47.08	74.00	-26.92	157	158	Peak	VERTICAL
3	10380.00	8.80	49.25	74.00	-24.75	164	182	Peak	VERTICAL
4	14205.00	14.01	51.29	74.00	-22.71	182	150	Peak	VERTICAL
5	15570.00	10.26	44.48	74.00	-29.52	156	152	Peak	VERTICAL
6	17715.00	14.89	50.65	74.00	-23.35	190	154	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHZ

Data: 213

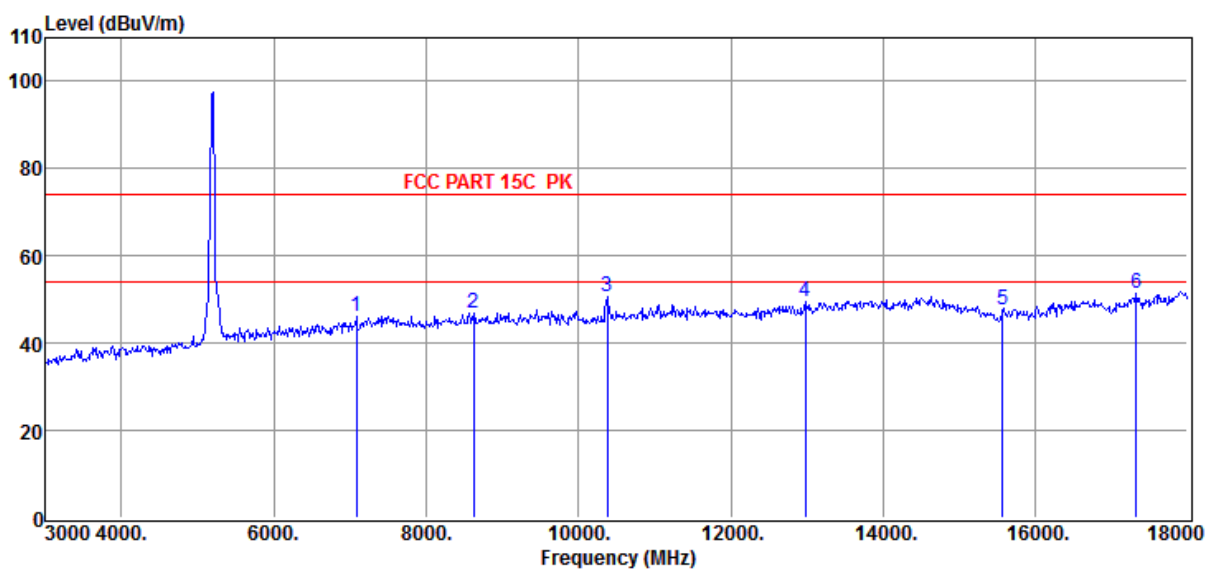

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7080.00	5.89	45.93	74.00	-28.07	153	167	Peak	HORIZONTAL
2	8625.00	6.53	46.88	74.00	-27.12	181	178	Peak	HORIZONTAL
3	10380.00	8.80	50.57	74.00	-23.43	161	157	Peak	HORIZONTAL
4	12975.00	9.88	49.45	74.00	-24.55	169	170	Peak	HORIZONTAL
5	15570.00	10.26	47.65	74.00	-26.35	150	152	Peak	HORIZONTAL
6	17325.00	15.77	51.50	74.00	-22.50	157	164	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5230MHz

Data: 214

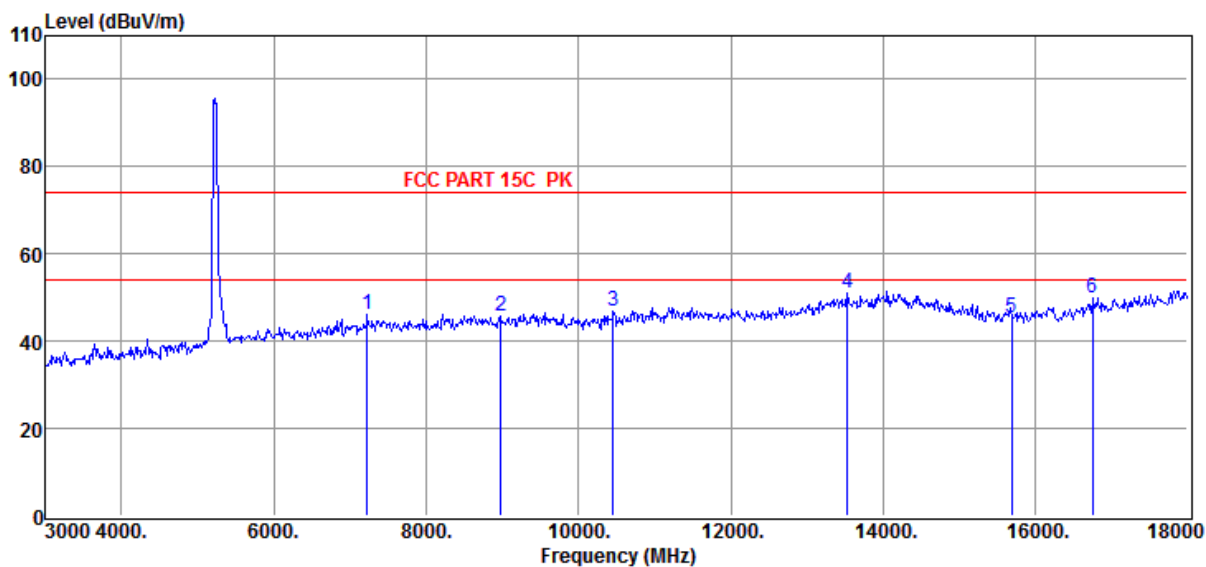

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7230.00	6.10	45.95	74.00	-28.05	179	152	Peak	HORIZONTAL
2	8985.00	7.07	45.77	74.00	-28.23	168	187	Peak	HORIZONTAL
3	10460.00	8.89	46.92	74.00	-27.08	158	173	Peak	HORIZONTAL
4	13530.00	11.38	51.07	74.00	-22.93	153	174	Peak	HORIZONTAL
5	15690.00	11.06	45.50	74.00	-28.50	176	187	Peak	HORIZONTAL
6	16755.00	14.88	50.00	74.00	-24.00	171	166	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5230MHZ

Data: 215

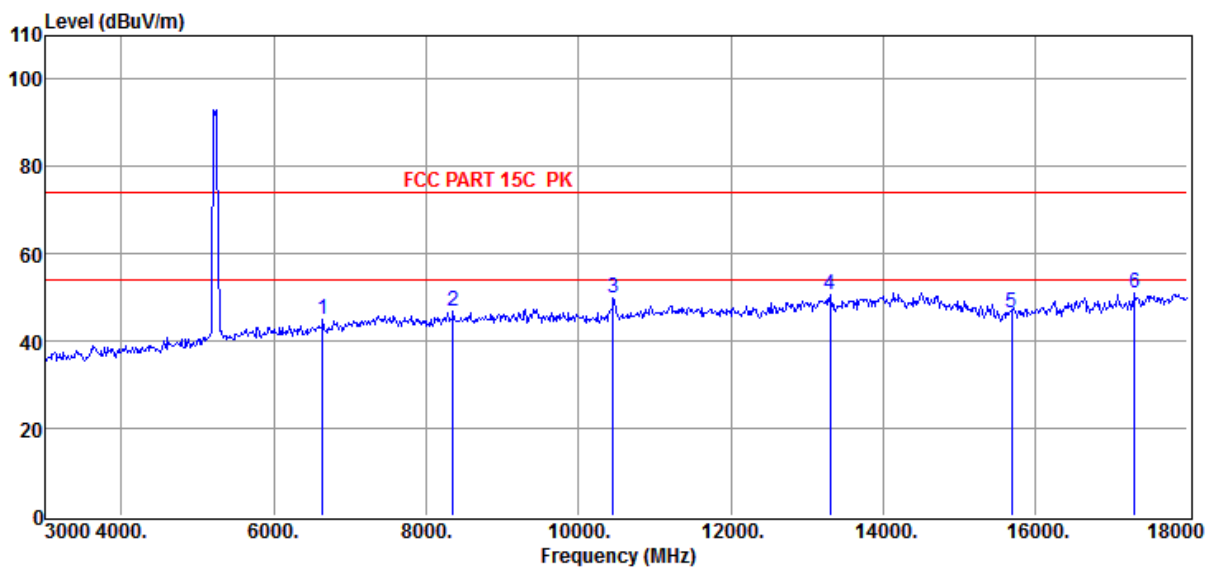

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6645.00	4.86	44.83	74.00	-29.17	182	185	Peak	VERTICAL
2	8355.00	6.19	46.68	74.00	-27.32	179	174	Peak	VERTICAL
3	10460.00	8.89	49.73	74.00	-24.27	163	155	Peak	VERTICAL
4	13305.00	10.92	50.47	74.00	-23.53	166	162	Peak	VERTICAL
5	15690.00	11.06	46.38	74.00	-27.62	180	157	Peak	VERTICAL
6	17310.00	15.80	51.08	74.00	-22.92	185	153	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5270MHZ

Data: 216

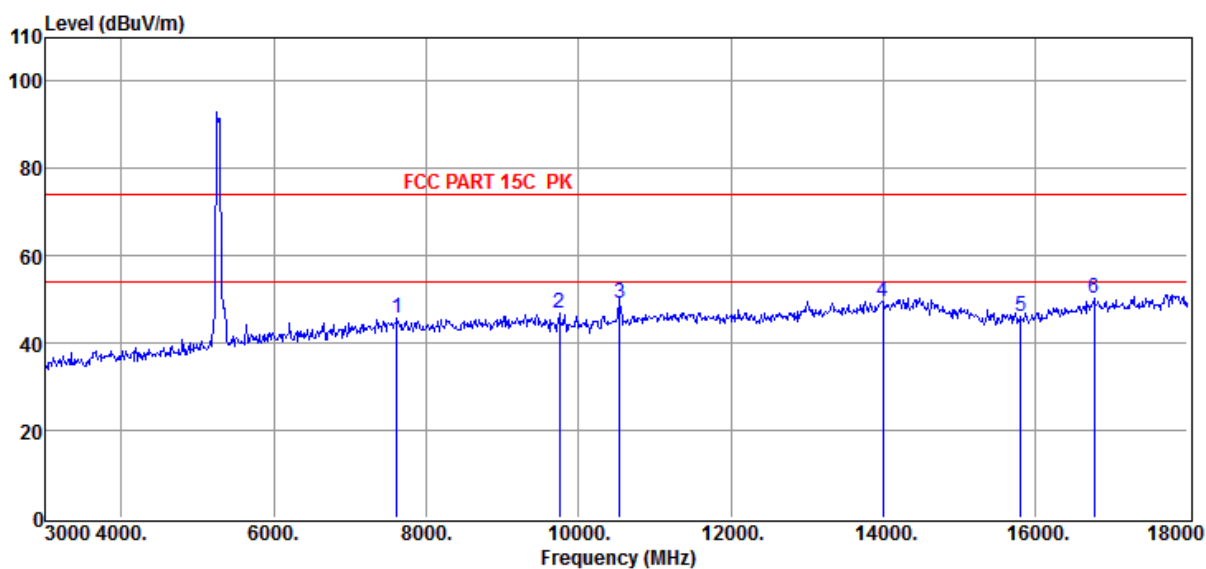

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7620.00	6.15	45.79	74.00	-28.21	186	168	Peak	VERTICAL
2	9750.00	8.09	46.72	74.00	-27.28	154	152	Peak	VERTICAL
3	10540.00	9.03	49.17	74.00	-24.83	181	169	Peak	VERTICAL
4	13995.00	12.98	49.59	74.00	-24.41	163	184	Peak	VERTICAL
5	15810.00	10.37	45.96	74.00	-28.04	184	172	Peak	VERTICAL
6	16770.00	15.08	50.36	74.00	-23.64	180	165	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5270MHZ

Data: 217

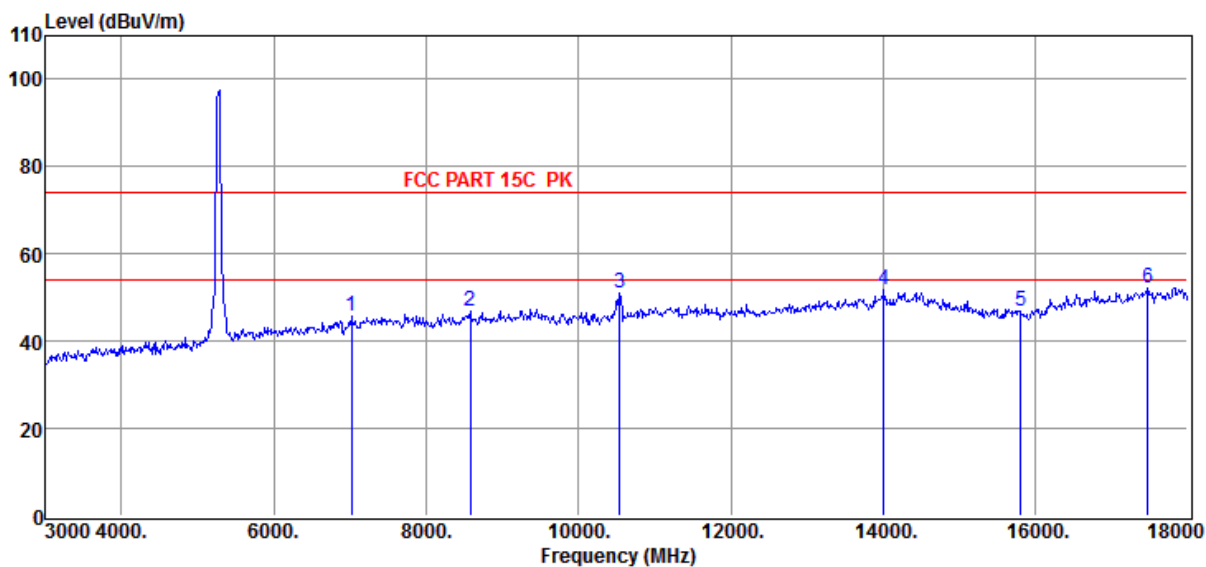

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7020.00	5.61	45.56	74.00	-28.44	161	177	Peak	HORIZONTAL
2	8580.00	6.48	46.81	74.00	-27.19	170	182	Peak	HORIZONTAL
3	10540.00	9.03	51.13	74.00	-22.87	160	156	Peak	HORIZONTAL
4	14010.00	13.01	51.71	74.00	-22.29	169	154	Peak	HORIZONTAL
5	15810.00	10.37	46.94	74.00	-27.06	184	186	Peak	HORIZONTAL
6	17475.00	15.60	51.98	74.00	-22.02	175	179	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHZ

Data: 218

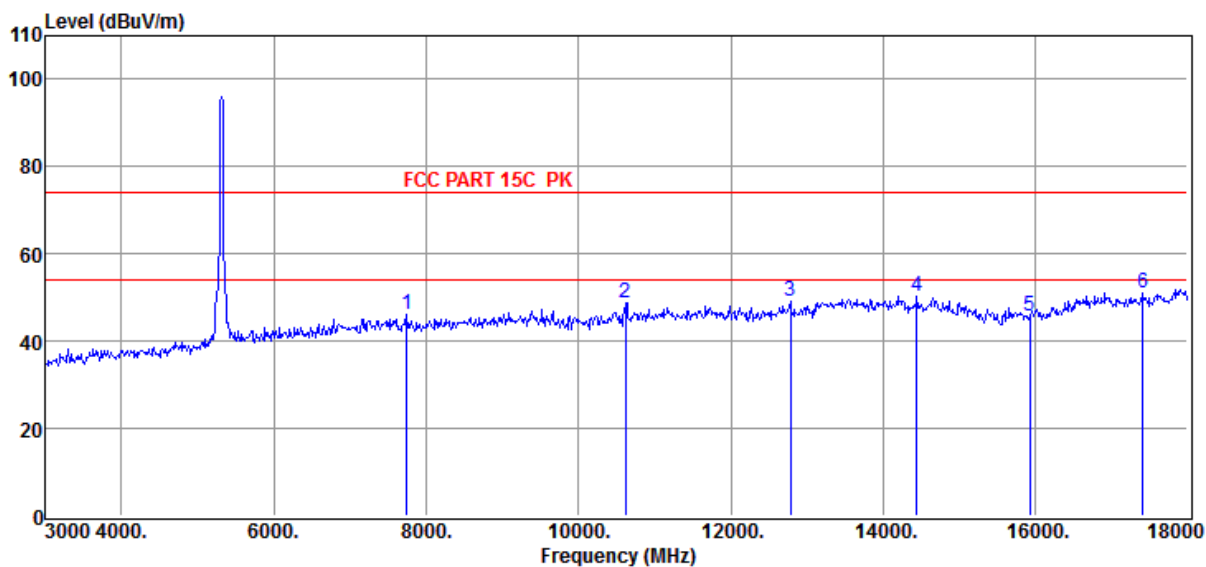

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7740.00	6.07	46.11	74.00	-27.89	159	183	Peak	HORIZONTAL
2	10620.00	9.15	48.75	74.00	-25.25	162	163	Peak	HORIZONTAL
3	12780.00	9.66	49.15	74.00	-24.85	181	181	Peak	HORIZONTAL
4	14445.00	13.39	50.45	74.00	-23.55	189	154	Peak	HORIZONTAL
5	15930.00	10.73	45.60	74.00	-28.40	162	165	Peak	HORIZONTAL
6	17415.00	15.59	51.15	74.00	-22.85	151	156	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHz

Data: 219

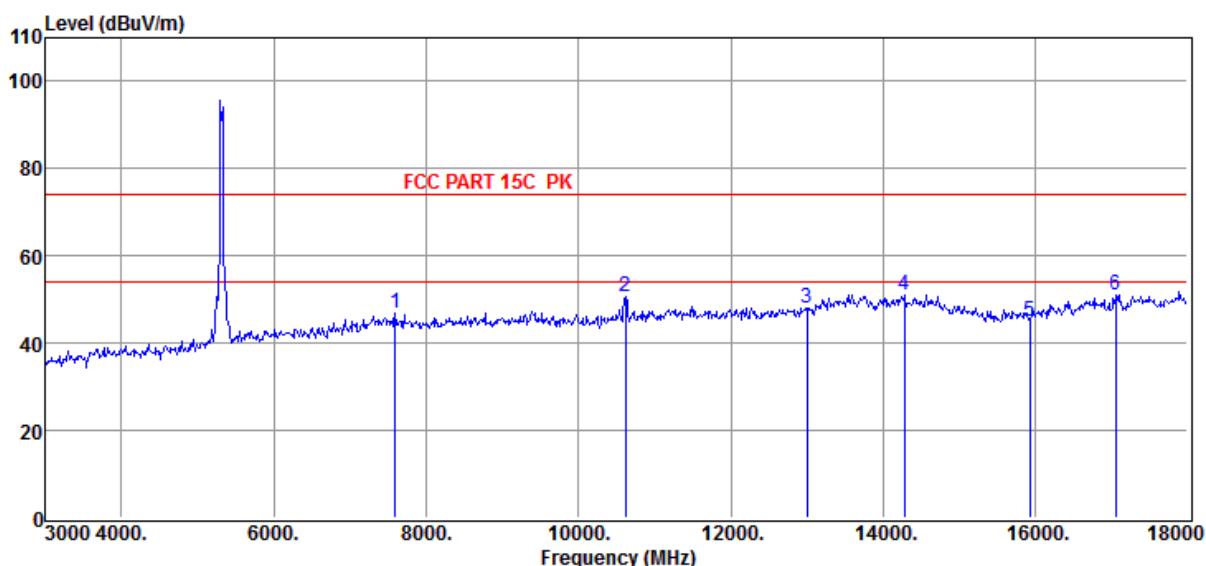

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	46.70	74.00	-27.30	155	163	Peak	VERTICAL
2	10620.00	9.15	50.66	74.00	-23.34	189	180	Peak	VERTICAL
3	13005.00	9.83	48.12	74.00	-25.88	171	169	Peak	VERTICAL
4	14280.00	13.10	51.13	74.00	-22.87	161	173	Peak	VERTICAL
5	15930.00	10.73	44.87	74.00	-29.13	171	167	Peak	VERTICAL
6	17055.00	15.90	51.04	74.00	-22.96	166	172	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHz

Data: 220

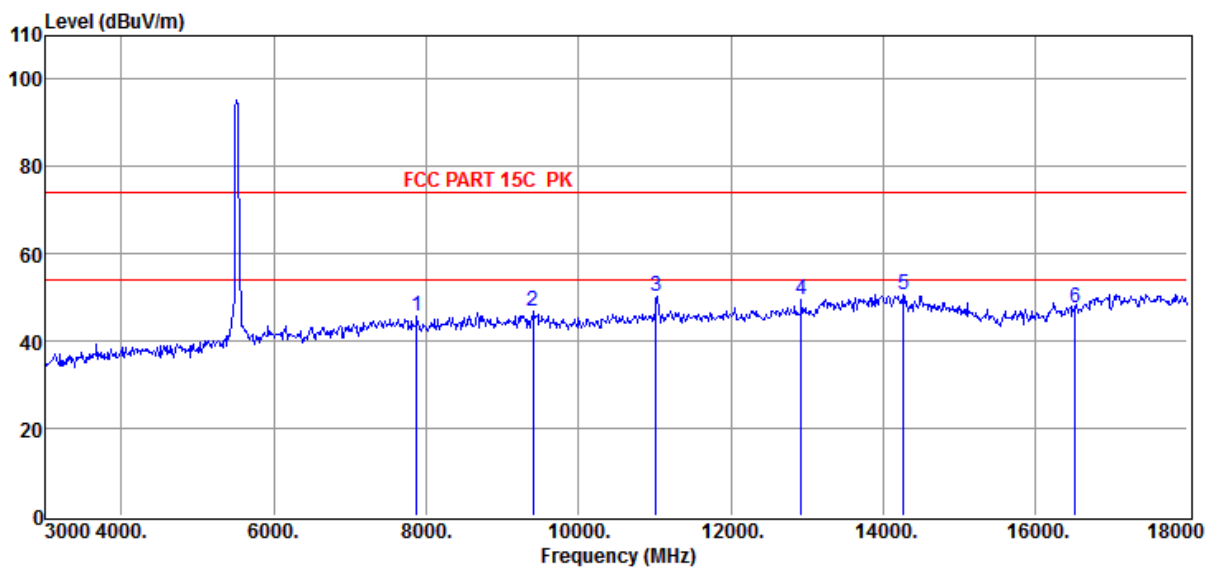

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7875.00	5.77	45.73	74.00	-28.27	176	181	Peak	VERTICAL
2	9405.00	8.17	46.99	74.00	-27.01	155	190	Peak	VERTICAL
3	11020.00	9.88	50.12	74.00	-23.88	172	161	Peak	VERTICAL
4	12930.00	10.04	49.53	74.00	-24.47	162	180	Peak	VERTICAL
5	14265.00	13.28	50.62	74.00	-23.38	162	181	Peak	VERTICAL
6	16530.00	13.34	47.81	74.00	-26.19	183	157	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHz

Data: 221

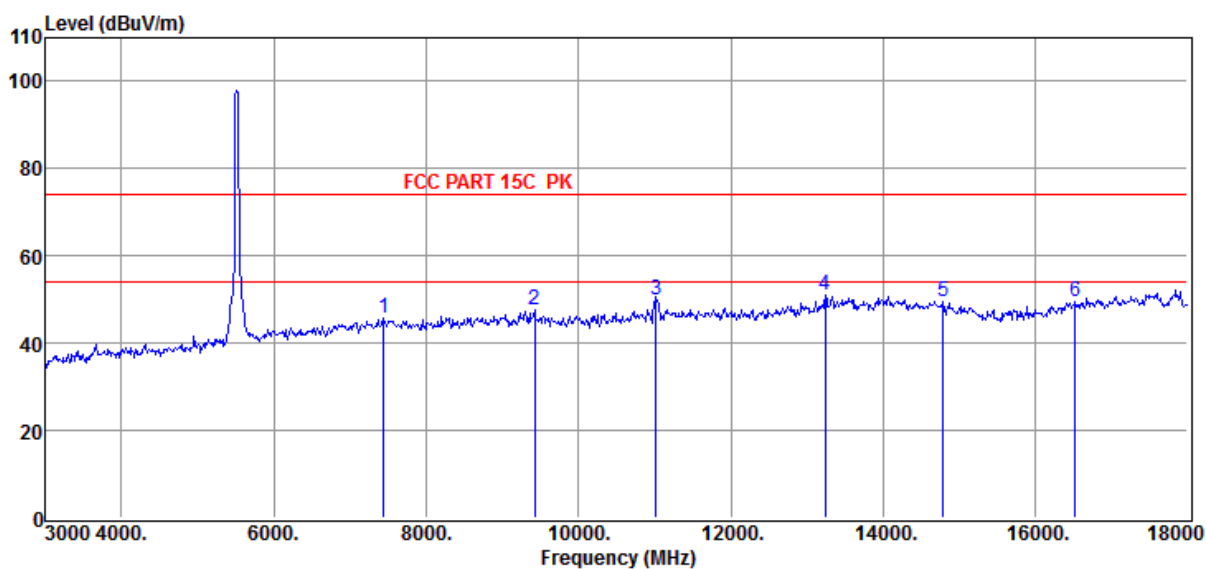

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7440.00	6.43	45.67	74.00	-28.33	174	173	Peak	HORIZONTAL
2	9420.00	8.11	47.51	74.00	-26.49	153	167	Peak	HORIZONTAL
3	11020.00	9.88	50.03	74.00	-23.97	155	186	Peak	HORIZONTAL
4	13245.00	10.55	51.10	74.00	-22.90	168	183	Peak	HORIZONTAL
5	14790.00	12.88	49.45	74.00	-24.55	179	184	Peak	HORIZONTAL
6	16530.00	13.34	49.45	74.00	-24.55	153	170	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5550MHz

Data: 222

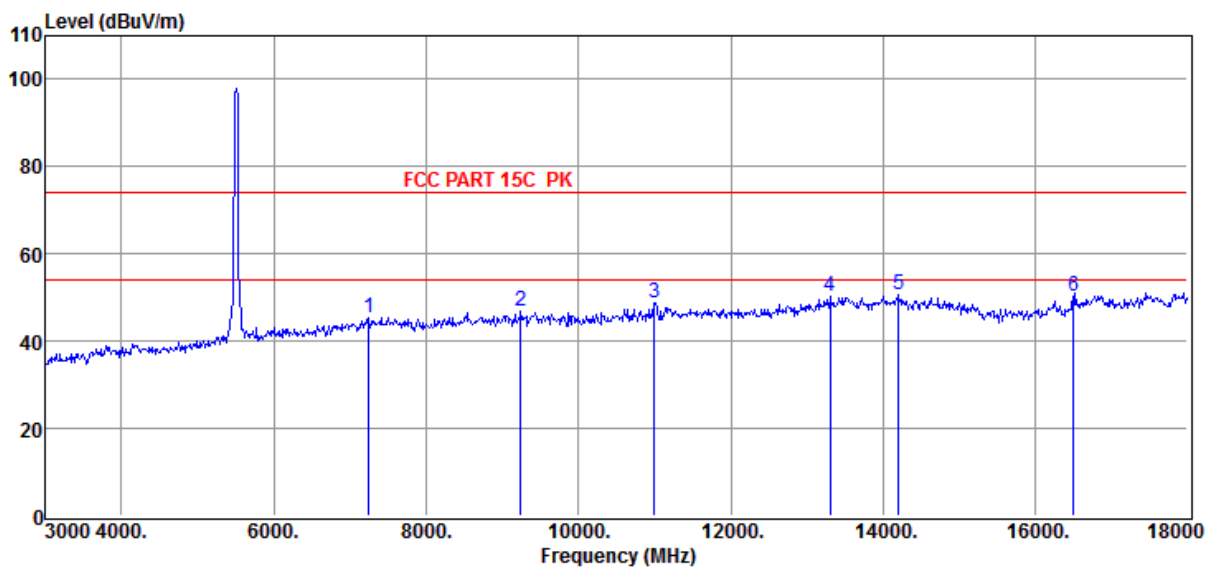

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7245.00	6.33	45.43	74.00	-28.57	188	188	Peak	HORIZONTAL
2	9240.00	7.43	46.83	74.00	-27.17	161	183	Peak	HORIZONTAL
3	11000.00	9.85	48.85	74.00	-25.15	169	151	Peak	HORIZONTAL
4	13305.00	10.92	50.26	74.00	-23.74	190	182	Peak	HORIZONTAL
5	14205.00	14.01	50.57	74.00	-23.43	158	168	Peak	HORIZONTAL
6	16500.00	13.06	50.23	74.00	-23.77	183	158	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5550MHZ

Data: 223

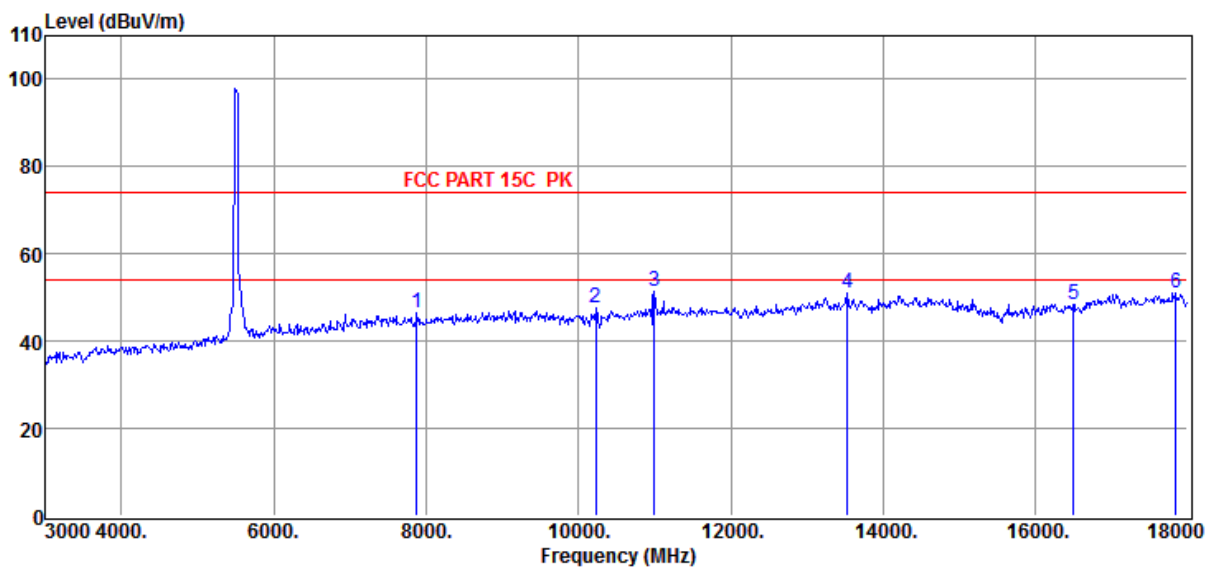

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7875.00	5.77	46.59	74.00	-27.41	184	172	Peak	VERTICAL
2	10230.00	8.19	47.57	74.00	-26.43	185	189	Peak	VERTICAL
3	11000.00	9.85	51.53	74.00	-22.47	167	169	Peak	VERTICAL
4	13530.00	11.38	50.96	74.00	-23.04	176	158	Peak	VERTICAL
5	16500.00	13.06	48.24	74.00	-25.76	157	180	Peak	VERTICAL
6	17850.00	15.29	50.95	74.00	-23.05	159	185	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5670MHZ

Data: 224

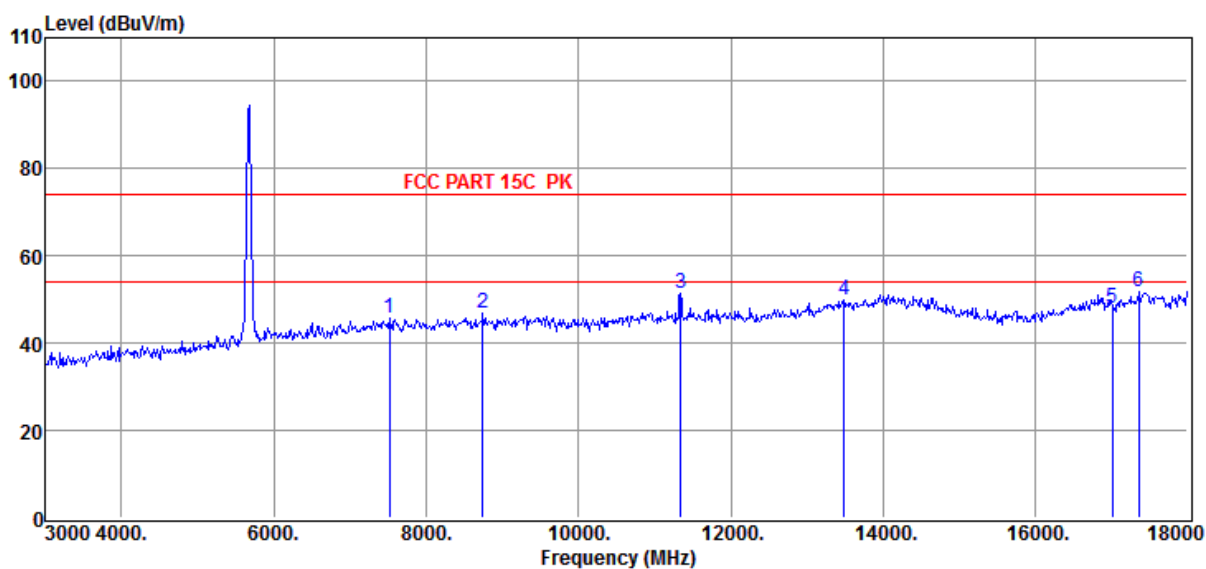

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7515.00	6.54	45.92	74.00	-28.08	181	163	Peak	VERTICAL
2	8745.00	6.67	46.98	74.00	-27.02	179	174	Peak	VERTICAL
3	11340.00	10.08	51.50	74.00	-22.50	158	184	Peak	VERTICAL
4	13485.00	11.25	49.97	74.00	-24.03	163	164	Peak	VERTICAL
5	17010.00	16.24	47.83	74.00	-26.17	187	162	Peak	VERTICAL
6	17355.00	15.70	51.70	74.00	-22.30	181	190	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5670MHz

Data: 225

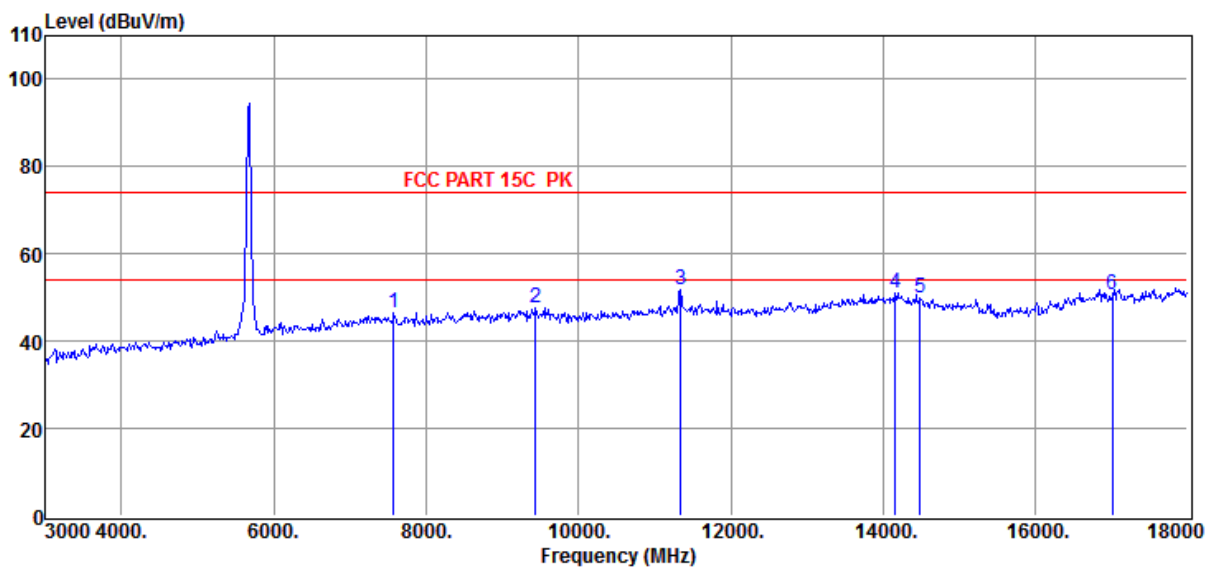

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	46.63	74.00	-27.37	162	152	Peak	HORIZONTAL
2	9435.00	8.05	47.81	74.00	-26.19	181	162	Peak	HORIZONTAL
3	11340.00	10.08	51.87	74.00	-22.13	187	171	Peak	HORIZONTAL
4	14160.00	13.67	51.21	74.00	-22.79	171	188	Peak	HORIZONTAL
5	14490.00	12.93	49.78	74.00	-24.22	176	188	Peak	HORIZONTAL
6	17010.00	16.24	50.58	74.00	-23.42	172	185	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHz

Data: 226

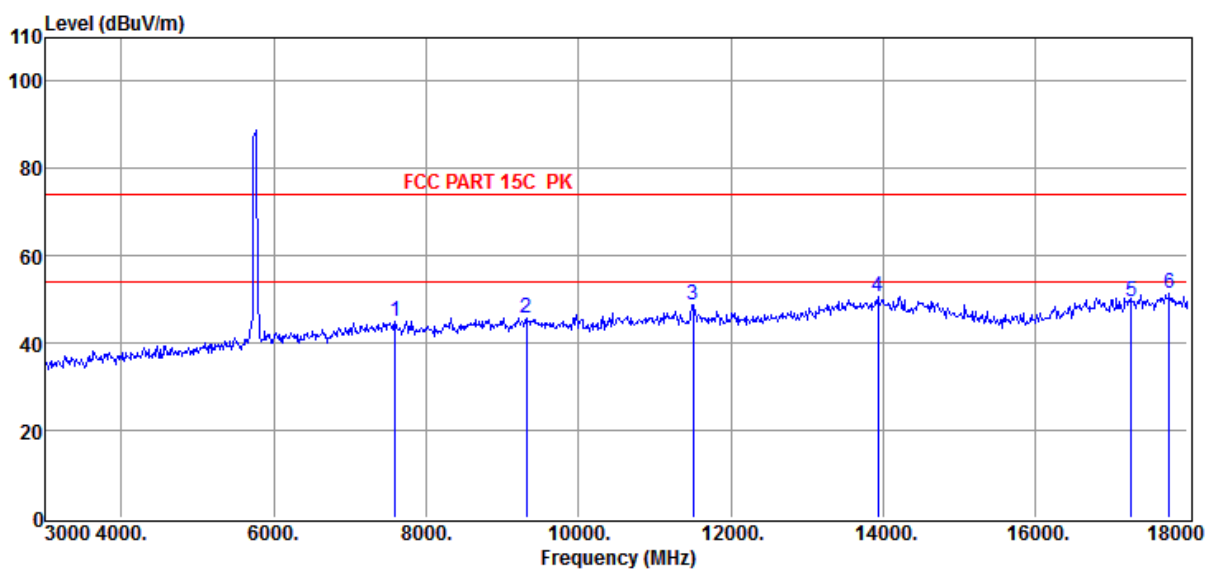

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.03	74.00	-28.97	159	185	Peak	HORIZONTAL
2	9315.00	7.75	45.79	74.00	-28.21	177	161	Peak	HORIZONTAL
3	11510.00	10.09	48.80	74.00	-25.20	184	170	Peak	HORIZONTAL
4	13935.00	12.73	50.68	74.00	-23.32	171	172	Peak	HORIZONTAL
5	17265.00	15.73	49.41	74.00	-24.59	185	190	Peak	HORIZONTAL
6	17760.00	15.11	51.58	74.00	-22.42	163	178	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHz

Data: 227

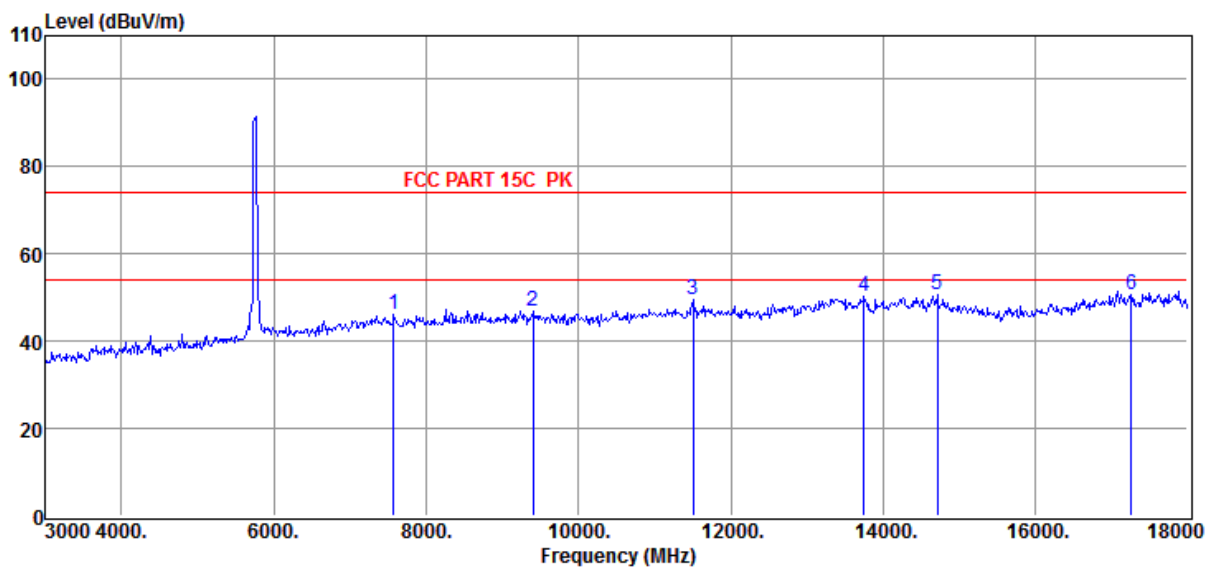

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	46.05	74.00	-27.95	173	186	Peak	VERTICAL
2	9405.00	8.17	46.88	74.00	-27.12	167	190	Peak	VERTICAL
3	11510.00	10.09	49.68	74.00	-24.32	173	164	Peak	VERTICAL
4	13755.00	11.96	50.14	74.00	-23.86	167	164	Peak	VERTICAL
5	14715.00	12.56	50.65	74.00	-23.35	166	188	Peak	VERTICAL
6	17265.00	15.73	50.65	74.00	-23.35	152	166	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHz

Data: 228

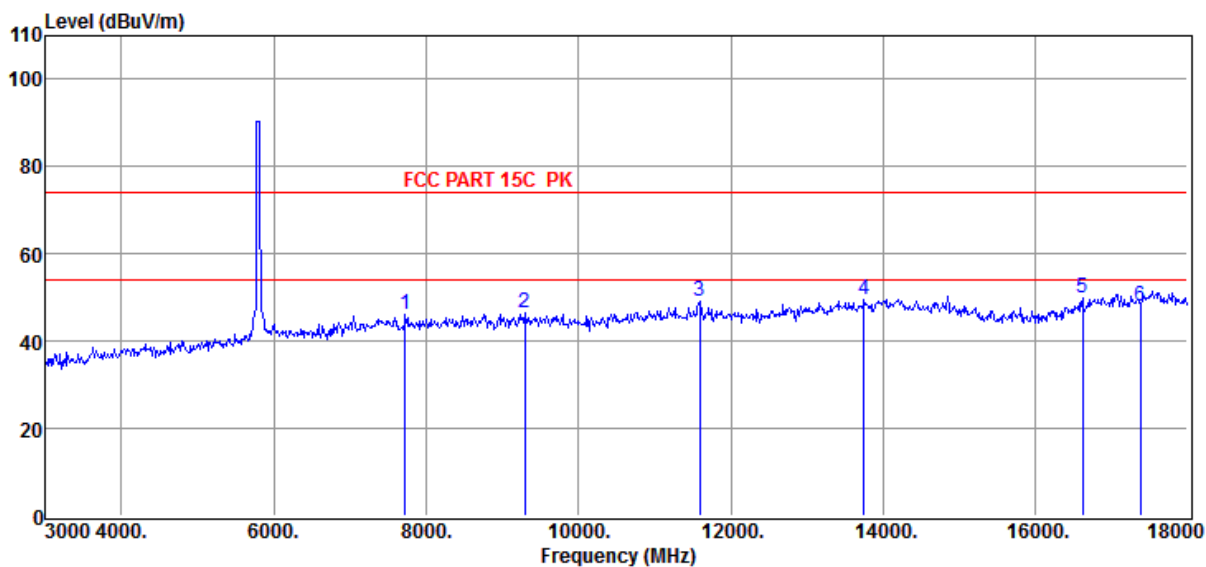

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7725.00	6.03	46.01	74.00	-27.99	177	159	Peak	VERTICAL
2	9300.00	7.67	46.64	74.00	-27.36	189	186	Peak	VERTICAL
3	11590.00	10.06	49.03	74.00	-24.97	153	156	Peak	VERTICAL
4	13755.00	11.96	49.63	74.00	-24.37	185	180	Peak	VERTICAL
5	16620.00	14.05	49.88	74.00	-24.12	152	173	Peak	VERTICAL
6	17385.00	15.63	48.11	74.00	-25.89	187	156	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHz

Data: 229

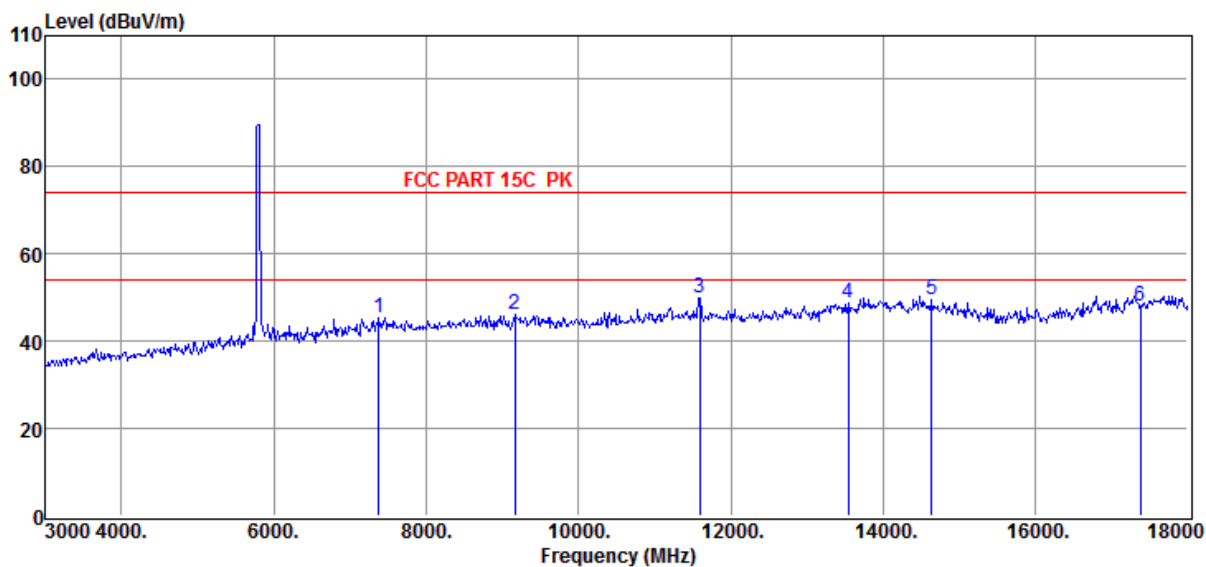

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7380.00	6.30	45.19	74.00	-28.81	154	162	Peak	HORIZONTAL
2	9165.00	7.20	46.03	74.00	-27.97	174	184	Peak	HORIZONTAL
3	11590.00	10.06	50.05	74.00	-23.95	172	181	Peak	HORIZONTAL
4	13545.00	11.39	48.73	74.00	-25.27	157	168	Peak	HORIZONTAL
5	14640.00	13.13	49.53	74.00	-24.47	188	153	Peak	HORIZONTAL
6	17385.00	15.63	48.03	74.00	-25.97	187	185	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHz

Data: 230

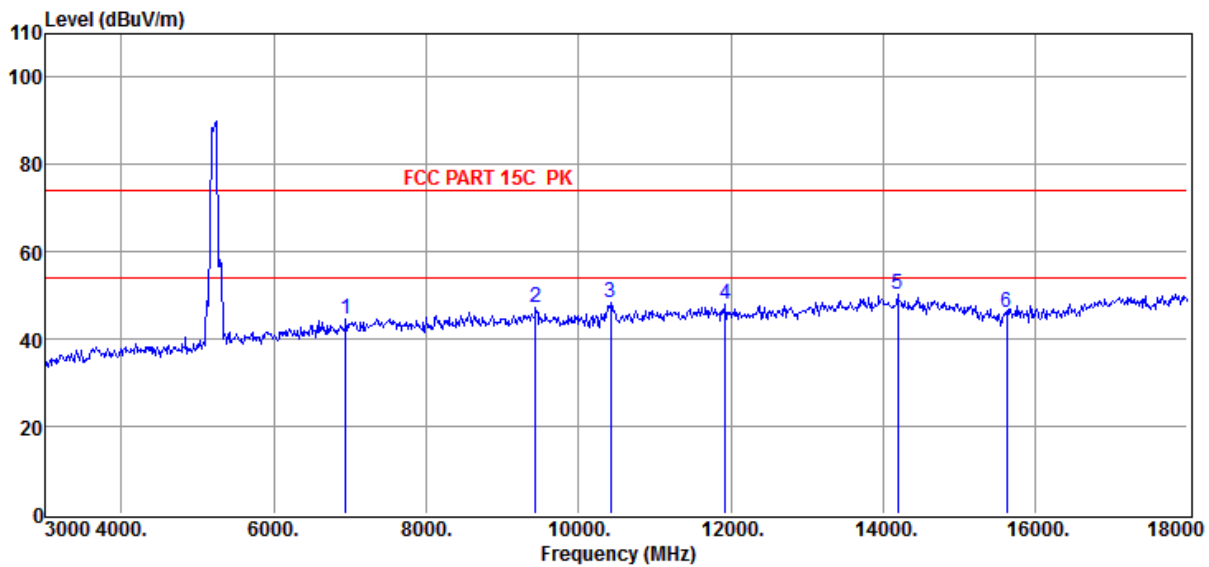

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6945.00	5.35	44.70	74.00	-29.30	182	153	Peak	HORIZONTAL
2	9435.00	8.05	47.41	74.00	-26.59	167	184	Peak	HORIZONTAL
3	10420.00	8.86	48.24	74.00	-25.76	190	163	Peak	HORIZONTAL
4	11925.00	9.96	48.15	74.00	-25.85	184	168	Peak	HORIZONTAL
5	14190.00	13.97	50.11	74.00	-23.89	154	177	Peak	HORIZONTAL
6	15630.00	10.50	45.95	74.00	-28.05	154	173	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHZ

Data: 231

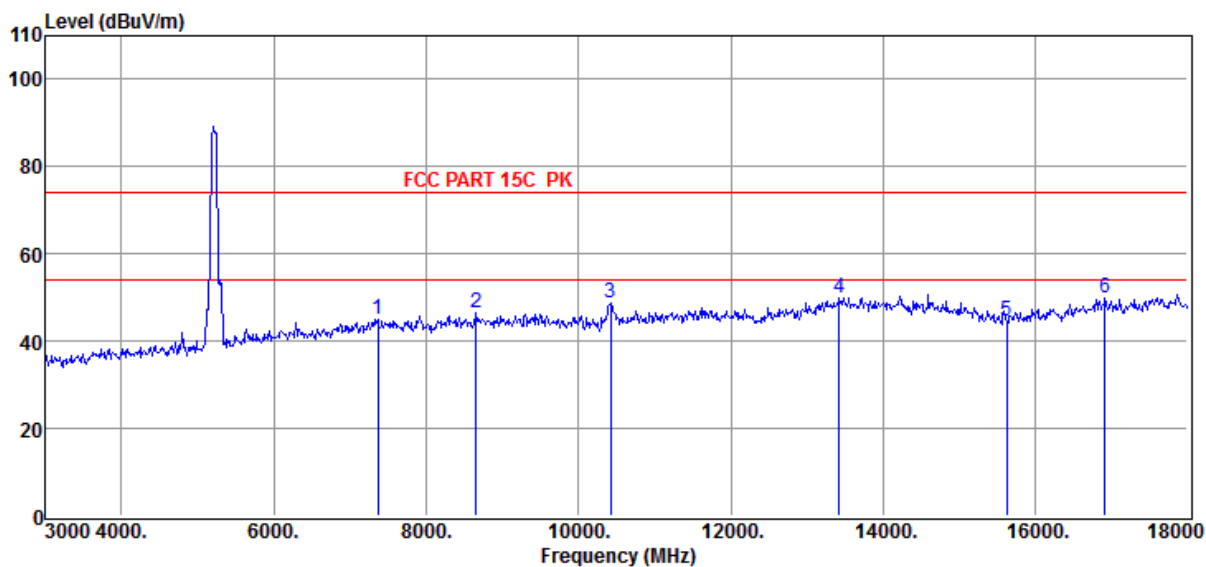

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7365.00	6.43	44.97	74.00	-29.03	189	179	Peak	VERTICAL
2	8655.00	6.57	46.41	74.00	-27.59	184	150	Peak	VERTICAL
3	10420.00	8.86	48.63	74.00	-25.37	170	152	Peak	VERTICAL
4	13425.00	10.92	49.92	74.00	-24.08	164	188	Peak	VERTICAL
5	15630.00	10.50	44.67	74.00	-29.33	160	156	Peak	VERTICAL
6	16920.00	15.17	49.97	74.00	-24.03	172	190	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHz

Data: 232

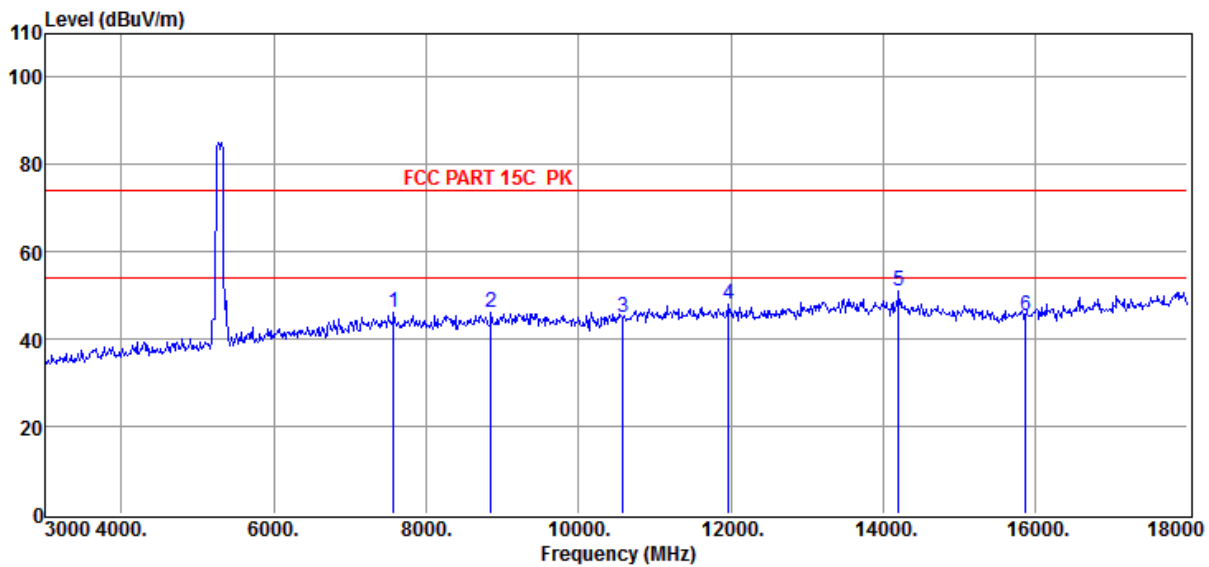

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7575.00	6.51	46.13	74.00	-27.87	155	165	Peak	VERTICAL
2	8850.00	6.55	46.23	74.00	-27.77	150	181	Peak	VERTICAL
3	10580.00	9.11	44.95	74.00	-29.05	180	155	Peak	VERTICAL
4	11970.00	9.88	48.06	74.00	-25.94	160	172	Peak	VERTICAL
5	14205.00	14.01	51.06	74.00	-22.94	182	174	Peak	VERTICAL
6	15870.00	10.61	45.41	74.00	-28.59	165	163	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHZ

Data: 233

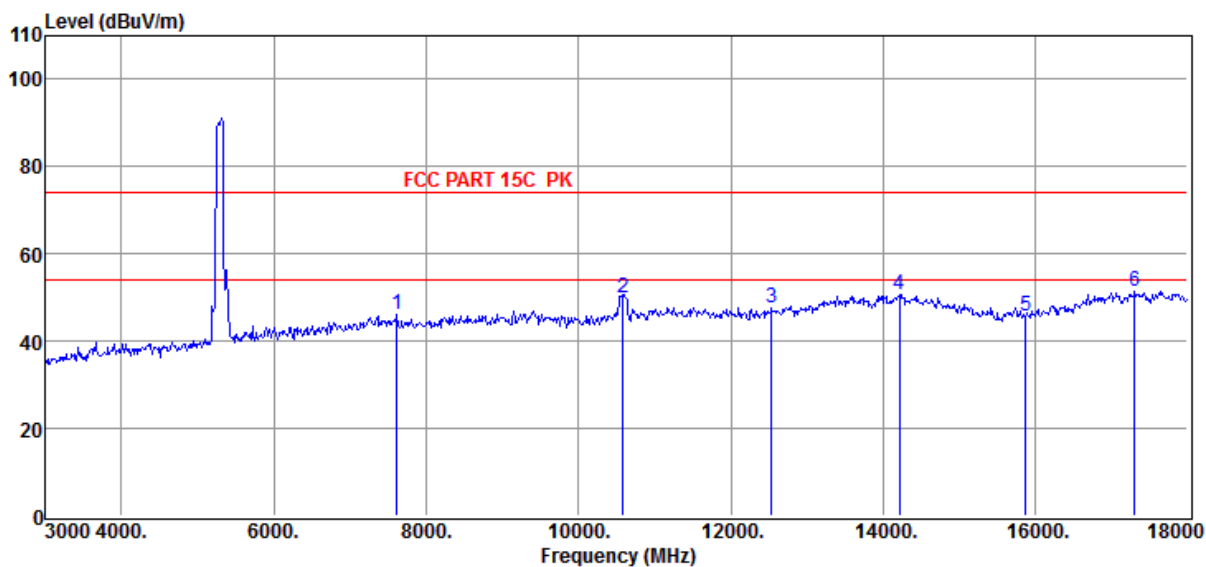

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7620.00	6.15	45.99	74.00	-28.01	172	155	Peak	HORIZONTAL
2	10580.00	9.11	50.01	74.00	-23.99	180	181	Peak	HORIZONTAL
3	12540.00	9.41	47.59	74.00	-26.41	190	175	Peak	HORIZONTAL
4	14220.00	13.82	50.67	74.00	-23.33	173	165	Peak	HORIZONTAL
5	15870.00	10.61	45.67	74.00	-28.33	154	177	Peak	HORIZONTAL
6	17310.00	15.80	51.42	74.00	-22.58	169	189	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHZ

Data: 234

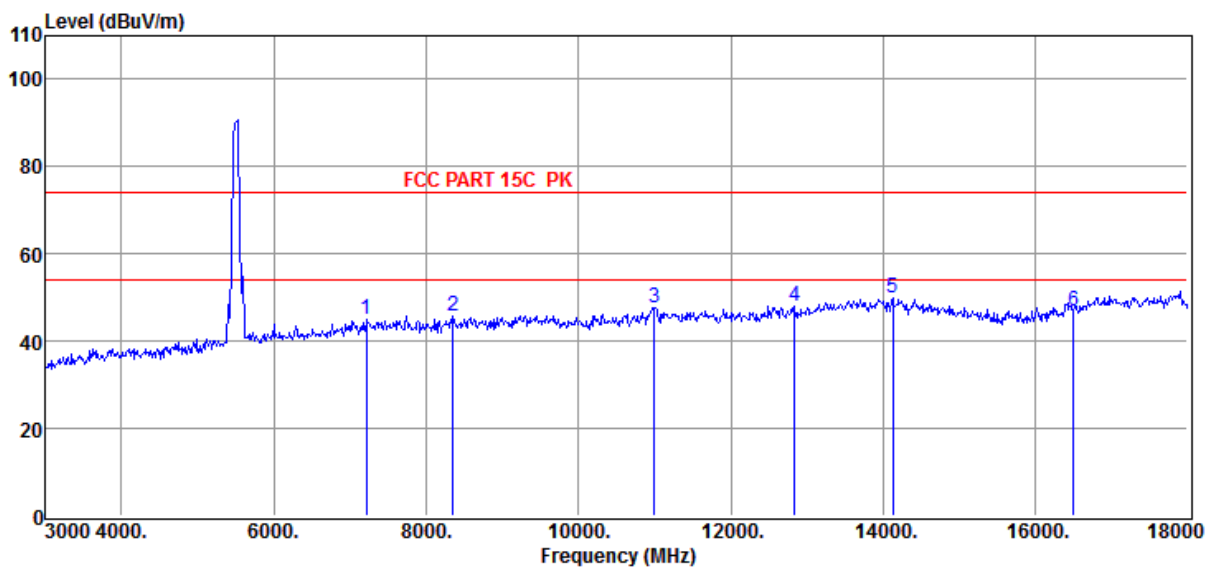

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7215.00	5.86	45.17	74.00	-28.83	183	159	Peak	HORIZONTAL
2	8355.00	6.19	45.92	74.00	-28.08	175	169	Peak	HORIZONTAL
3	11060.00	9.85	47.71	74.00	-26.29	183	184	Peak	HORIZONTAL
4	12840.00	9.82	47.94	74.00	-26.06	182	156	Peak	HORIZONTAL
5	14130.00	13.37	49.85	74.00	-24.15	167	188	Peak	HORIZONTAL
6	16590.00	13.06	46.76	74.00	-27.24	184	185	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-27-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHz

Data: 235

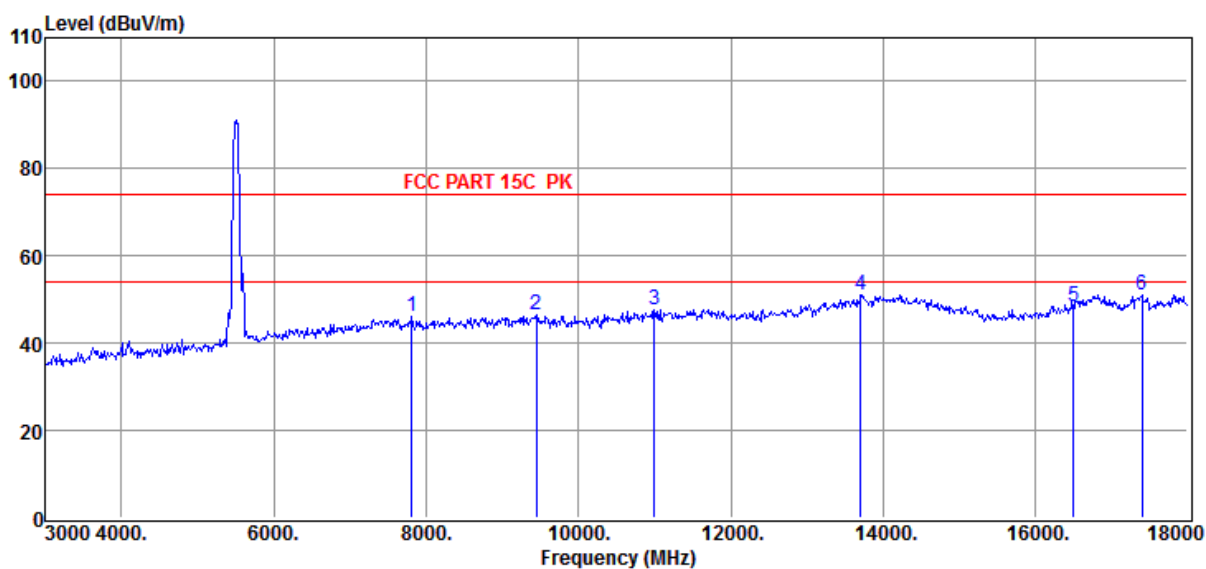

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7815.00	6.17	46.08	74.00	-27.92	190	152	Peak	VERTICAL
2	9450.00	7.98	46.46	74.00	-27.54	152	169	Peak	VERTICAL
3	11060.00	9.85	47.56	74.00	-26.44	173	178	Peak	VERTICAL
4	13710.00	11.91	51.02	74.00	-22.98	181	173	Peak	VERTICAL
5	16590.00	13.06	48.39	74.00	-25.61	162	159	Peak	VERTICAL
6	17400.00	15.59	51.05	74.00	-22.95	188	190	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5610MHZ

Data: 236

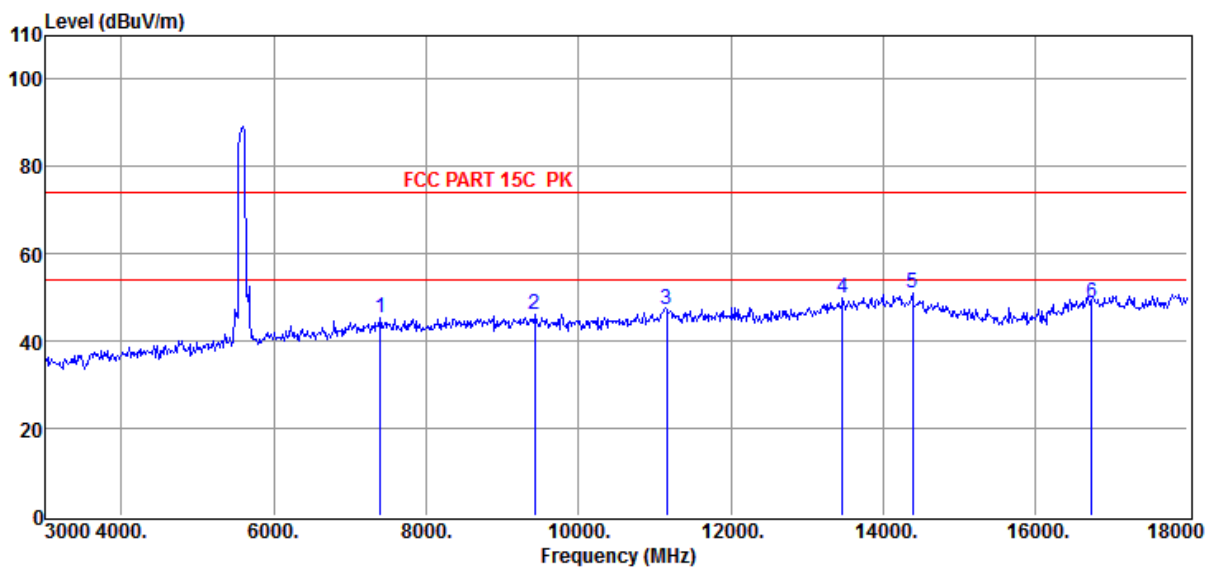

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7395.00	6.15	45.45	74.00	-28.55	179	153	Peak	VERTICAL
2	9420.00	8.11	45.96	74.00	-28.04	166	173	Peak	VERTICAL
3	11220.00	10.24	47.33	74.00	-26.67	172	151	Peak	VERTICAL
4	13470.00	11.18	49.89	74.00	-24.11	164	165	Peak	VERTICAL
5	14385.00	13.68	50.94	74.00	-23.06	182	181	Peak	VERTICAL
6	16830.00	14.70	48.90	74.00	-25.10	180	174	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-27-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5610MHZ

Data: 237

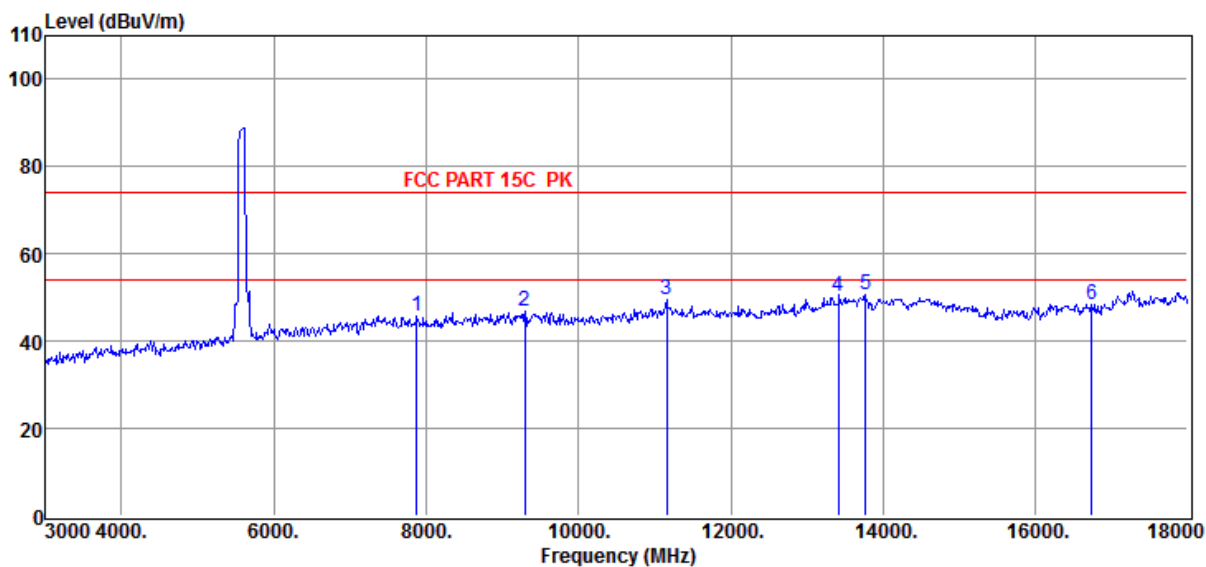

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7875.00	5.77	45.83	74.00	-28.17	154	174	Peak	HORIZONTAL
2	9300.00	7.67	46.79	74.00	-27.21	156	164	Peak	HORIZONTAL
3	11220.00	10.24	49.53	74.00	-24.47	180	189	Peak	HORIZONTAL
4	13410.00	10.85	50.42	74.00	-23.58	186	177	Peak	HORIZONTAL
5	13770.00	11.98	50.74	74.00	-23.26	164	173	Peak	HORIZONTAL
6	16830.00	14.70	48.29	74.00	-25.71	157	157	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHz

Data: 238

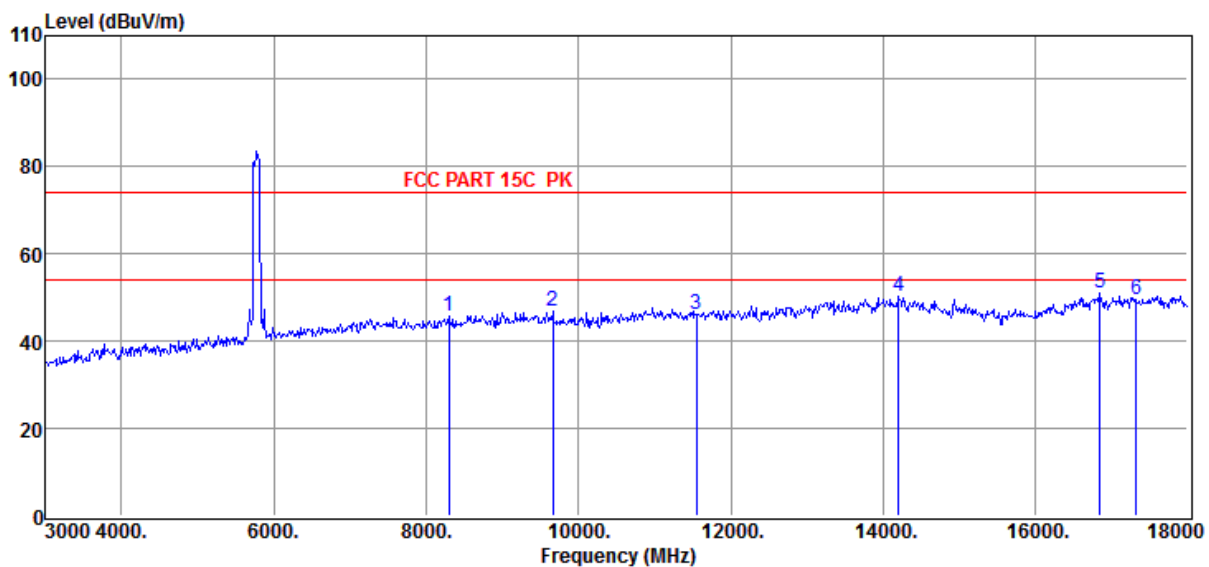

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	8295.00	6.34	45.83	74.00	-28.17	177	166	Peak	HORIZONTAL
2	9660.00	8.08	46.98	74.00	-27.02	190	160	Peak	HORIZONTAL
3	11550.00	10.07	45.94	74.00	-28.06	181	181	Peak	HORIZONTAL
4	14205.00	14.01	50.20	74.00	-23.80	162	160	Peak	HORIZONTAL
5	16845.00	15.19	50.87	74.00	-23.13	151	182	Peak	HORIZONTAL
6	17325.00	15.77	49.36	74.00	-24.64	166	151	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHz

Data: 239

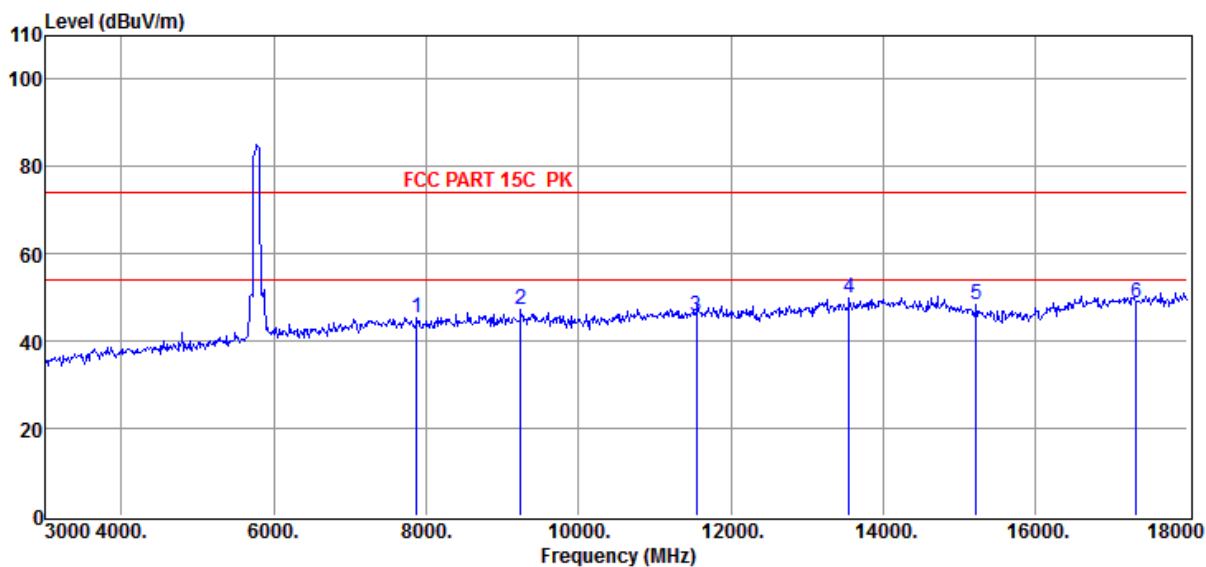

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7875.00	5.77	45.49	74.00	-28.51	167	174	Peak	VERTICAL
2	9240.00	7.43	47.37	74.00	-26.63	181	182	Peak	VERTICAL
3	11550.00	10.07	45.69	74.00	-28.31	185	190	Peak	VERTICAL
4	13560.00	11.41	49.85	74.00	-24.15	183	178	Peak	VERTICAL
5	15225.00	11.04	48.20	74.00	-25.80	166	187	Peak	VERTICAL
6	17325.00	15.77	48.69	74.00	-25.31	162	160	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

6. Band Edge Compliance (Radiated Method)

6.1. Block diagram of test setup

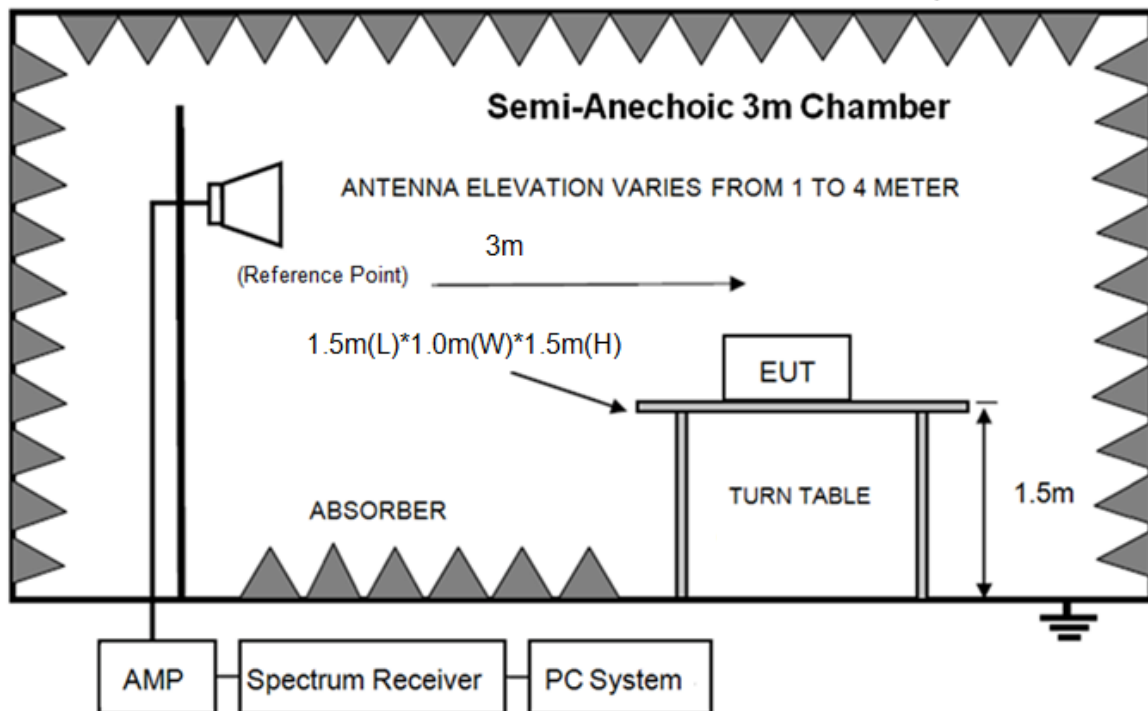

6.2. Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.
 - (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.
 - (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/ MHz.
 - (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm / MHz.
 - (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
 - (6) The provisions of §15.205 apply to intentional radiators operating under this section.
- 27 dBm/MHz Limit=95.2+EIRP [dBm]=95.2-27=68.2 dBμV/m

6.3. Test Procedure

Same with clause 4.3 except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

6.4. Test result

Pass. (See below detailed test result)

Note1: As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5180MHz

Data: 240

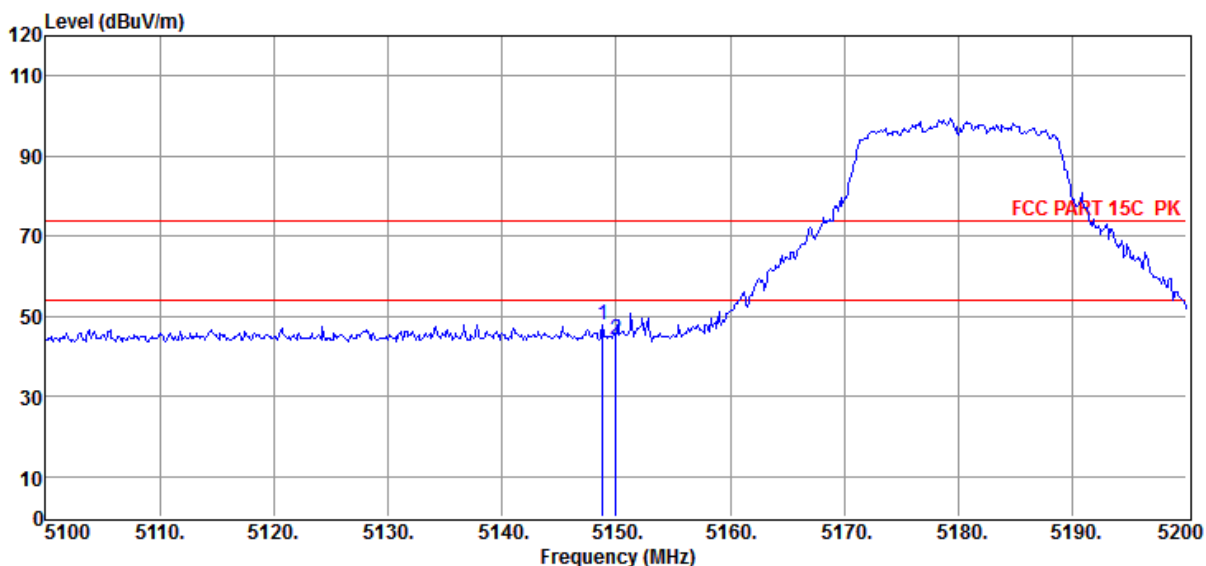

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5148.80	1.51	47.82	74.00	-26.18	156	79	Peak	VERTICAL
2	5150.00	1.50	44.14	74.00	-29.86	174	82	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5180MHz

Data: 241

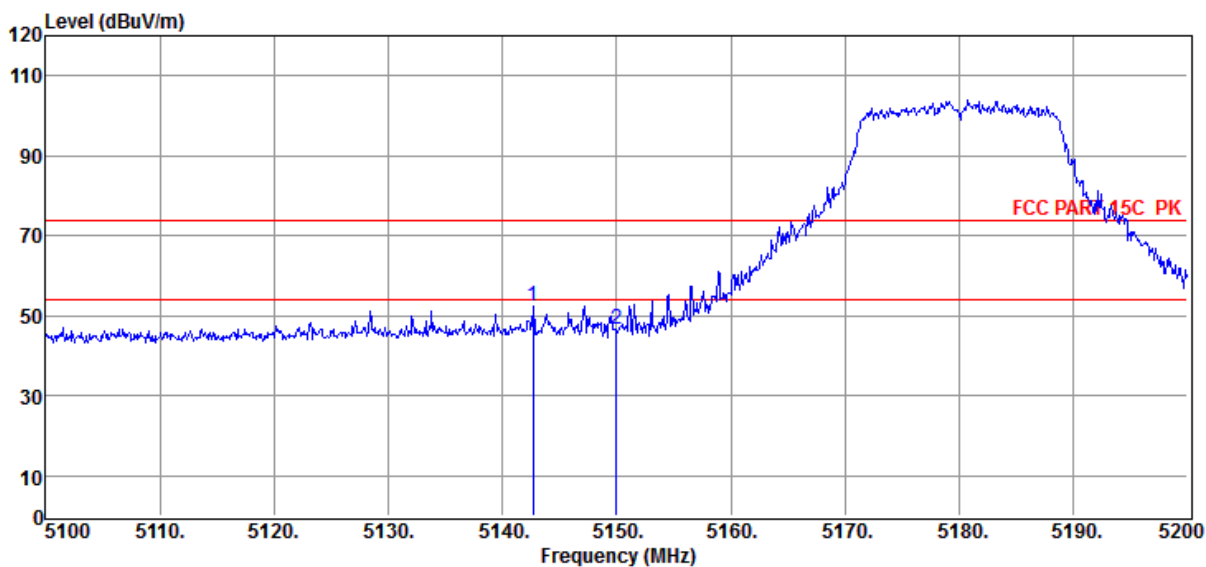

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5142.70	1.54	52.57	74.00	-21.43	163	253	Peak	HORIZONTAL
2	5150.00	1.50	46.73	74.00	-27.27	187	321	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5320MHz

Data: 242

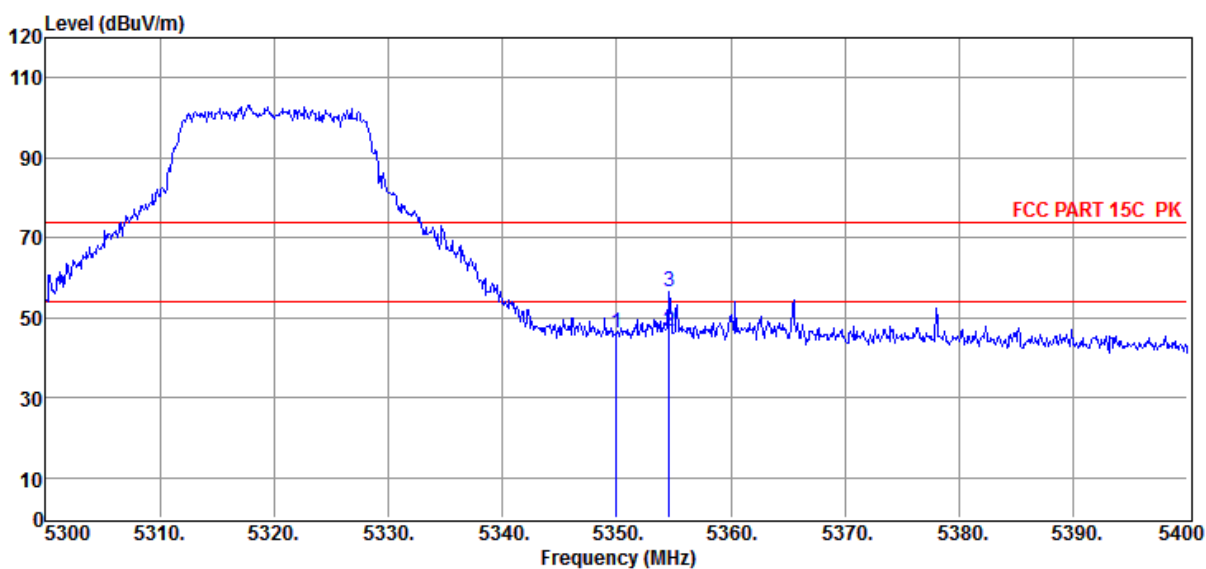

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	46.10	74.00	-27.90	179	156	Peak	HORIZONTAL
2	5354.60	1.71	46.58	54.00	-7.42	182	341	Average	HORIZONTAL
3	5354.60	1.71	56.68	74.00	-17.32	157	119	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5320MHz

Data: 243

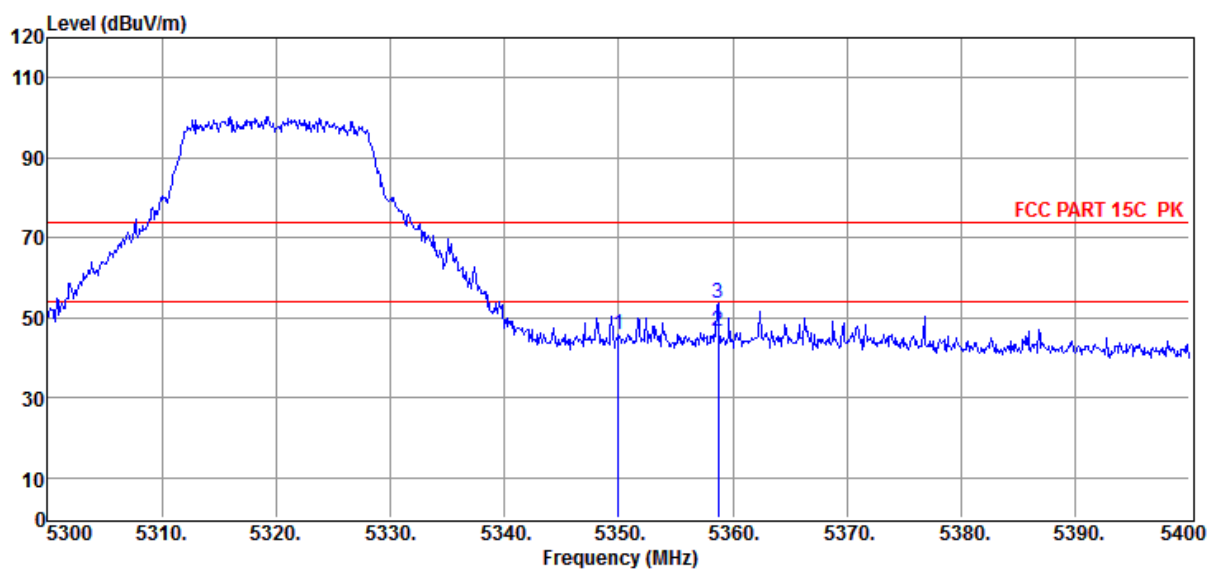

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	45.80	74.00	-28.20	166	241	Peak	VERTICAL
2	5358.70	1.74	46.41	54.00	-7.59	177	198	Average	VERTICAL
3	5358.70	1.74	53.51	74.00	-20.49	175	77	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5500MHz

Data: 244

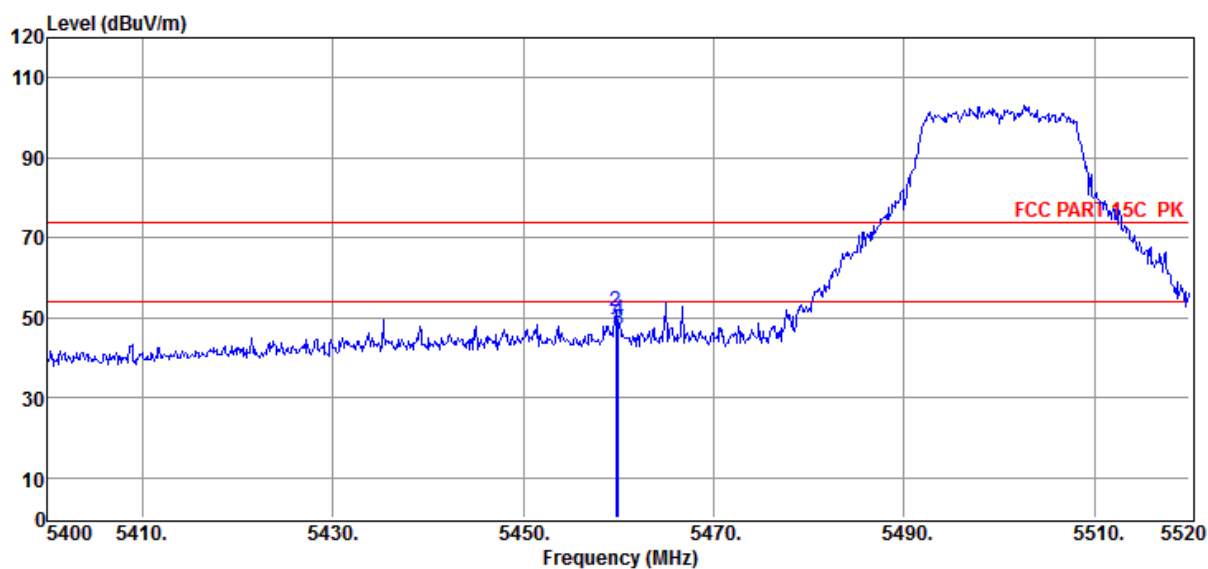

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5459.76	2.24	46.81	54.00	-7.19	165	98	Average	VERTICAL
2	5459.76	2.24	51.73	74.00	-22.27	179	250	Peak	VERTICAL
3	5460.00	2.24	47.11	54.00	-6.89	188	302	Average	VERTICAL
4	5460.00	2.24	49.41	74.00	-24.59	161	16	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5500MHz

Data: 245

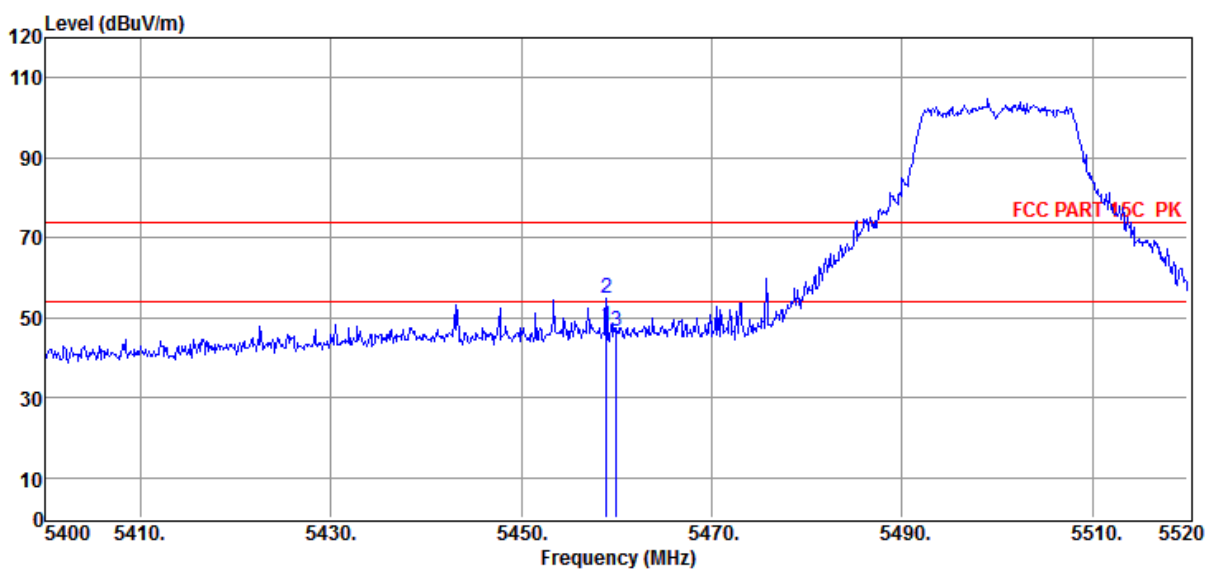

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5458.92	2.24	47.71	54.00	-6.29	185	154	Average	HORIZONTAL
2	5458.92	2.24	54.77	74.00	-19.23	163	302	Peak	HORIZONTAL
3	5460.00	2.24	46.70	74.00	-27.30	151	67	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5745MHz

Data: 246

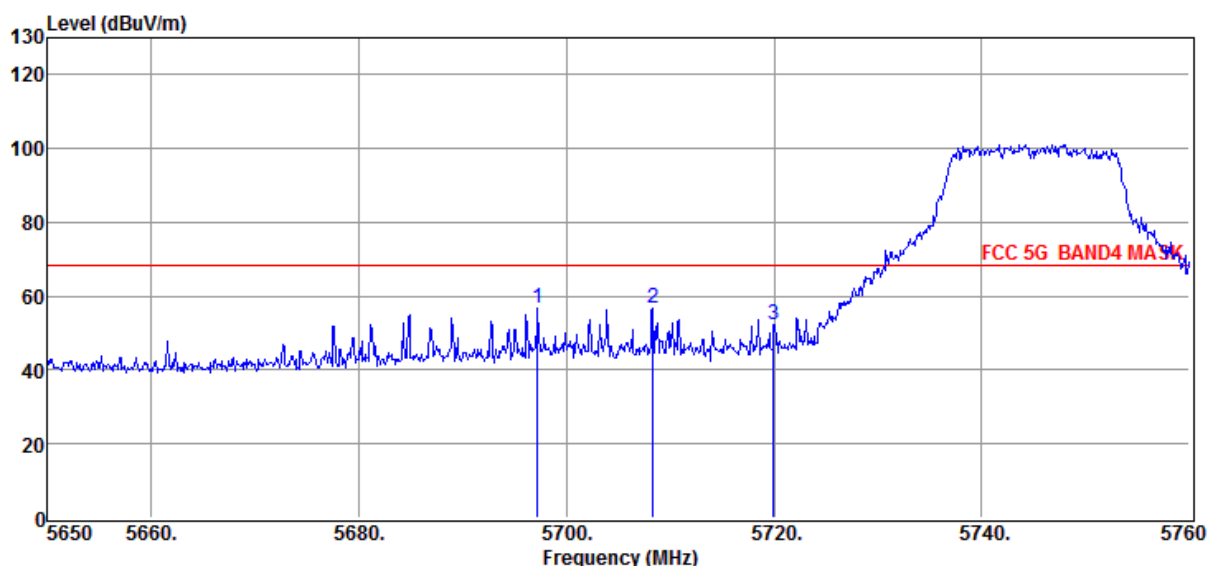

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5697.19	2.90	56.54	68.20	-11.66	159	258	Peak	HORIZONTAL
2	5708.30	2.87	56.91	68.20	-11.29	163	456	Peak	HORIZONTAL
3	5719.96	2.81	52.25	68.20	-15.95	149	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5745MHz

Data: 247

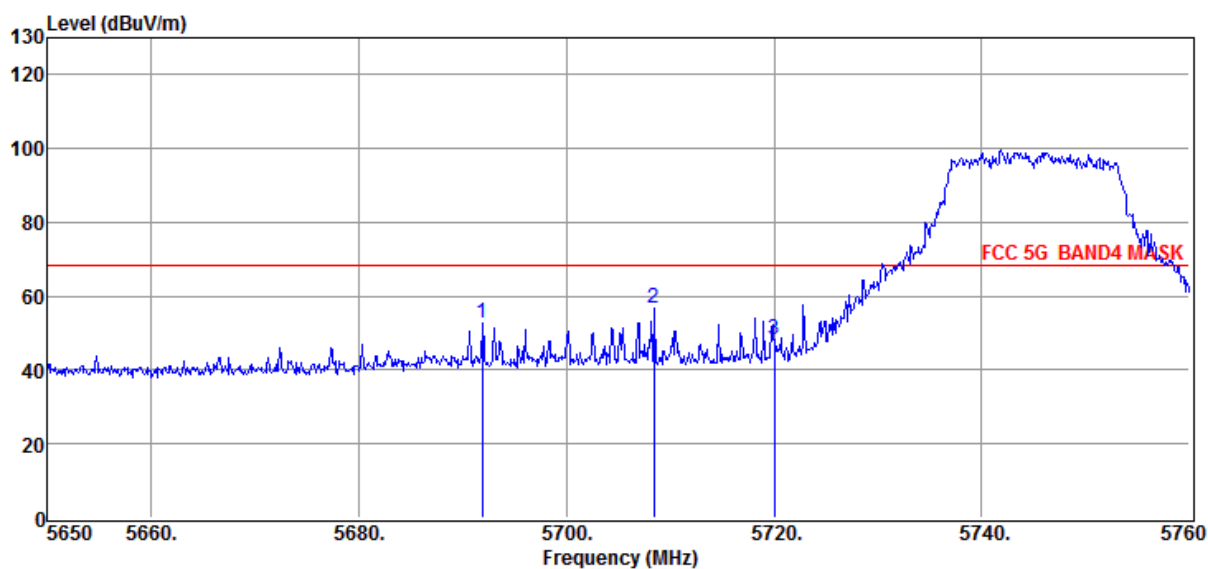

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5691.91	2.88	52.76	68.20	-15.44	155	142	Peak	VERTICAL
2	5708.41	2.88	56.79	68.20	-11.41	168	56	Peak	VERTICAL
3	5720.00	2.81	48.27	68.20	-19.93	113	325	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5825MHz

Data: 248

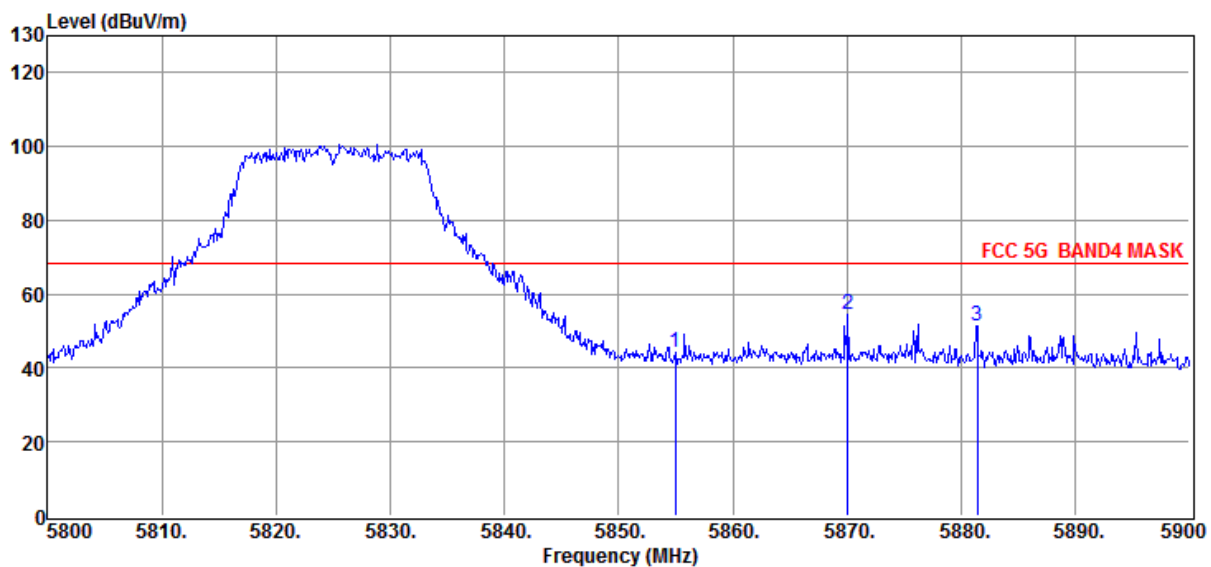

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	44.29	68.20	-23.91	156	216	Peak	HORIZONTAL
2	5870.10	2.98	54.48	68.20	-13.72	148	154	Peak	HORIZONTAL
3	5881.40	3.15	51.33	68.20	-16.87	128	21	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5825MHz

Data: 249

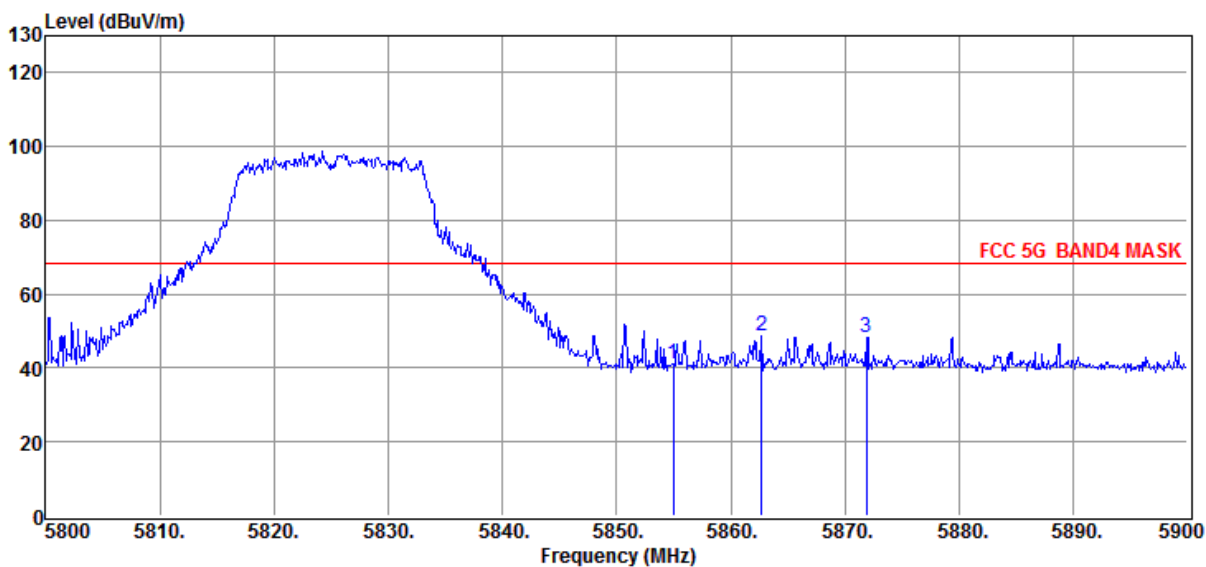

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	41.07	68.20	-27.13	173	35	Peak	VERTICAL
2	5862.70	2.87	48.82	68.20	-19.38	189	219	Peak	VERTICAL
3	5871.90	3.01	48.37	68.20	-19.83	147	116	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5180MHz

Data: 250

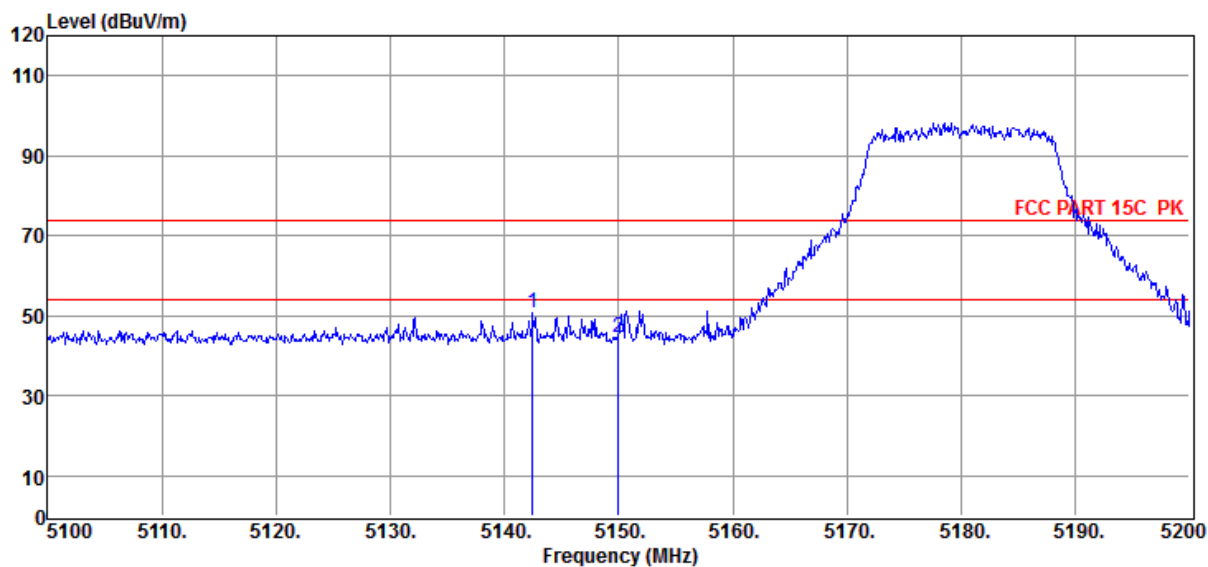

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5142.50	1.54	50.57	74.00	-23.43	165	254	Peak	HORIZONTAL
2	5150.00	1.50	44.63	74.00	-29.37	177	351	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5180MHz

Data: 251

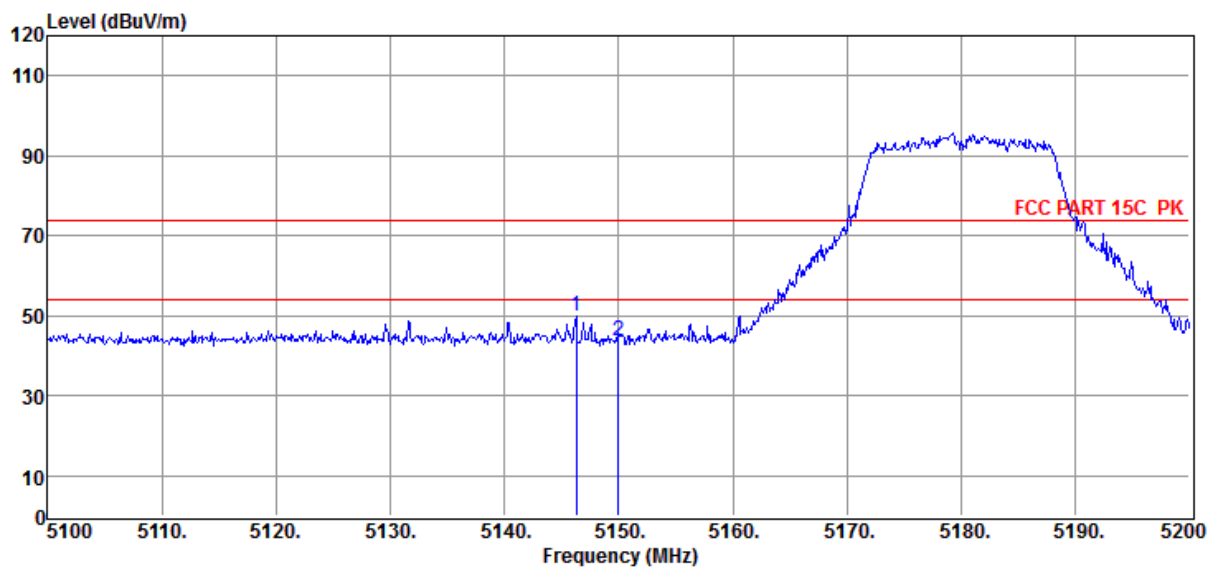

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5146.30	1.51	49.89	74.00	-24.11	172	23	Peak	VERTICAL
2	5150.00	1.50	43.64	74.00	-30.36	157	98	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5320MHz

Data: 252

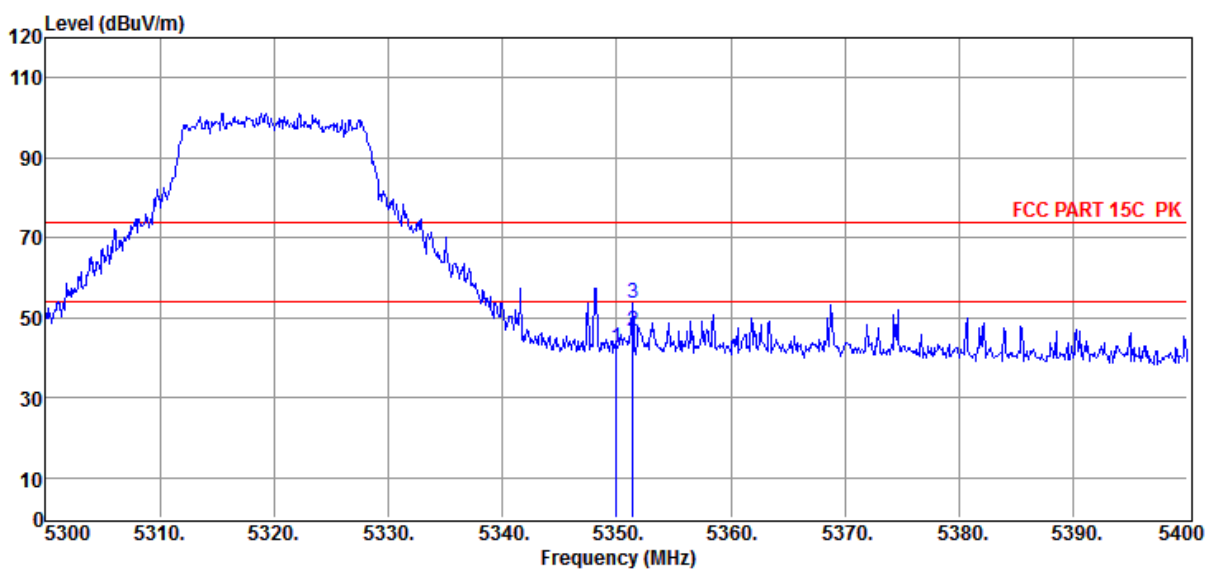

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	42.56	74.00	-31.44	188	245	Peak	VERTICAL
2	5351.40	1.69	46.66	54.00	-7.34	176	237	Average	VERTICAL
3	5351.40	1.69	53.46	74.00	-20.54	152	26	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5320MHz

Data: 253

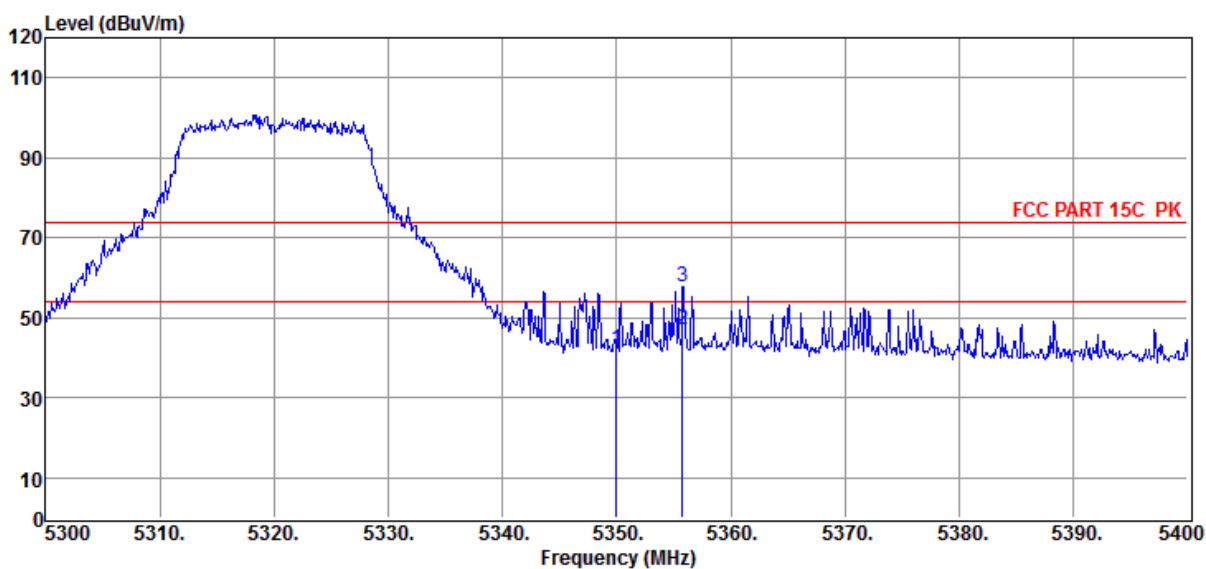

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	42.22	74.00	-31.78	179	111	Peak	HORIZONTAL
2	5355.80	1.72	47.09	54.00	-6.91	164	156	Average	HORIZONTAL
3	5355.80	1.72	57.87	74.00	-16.13	150	34	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5500MHz

Data: 254

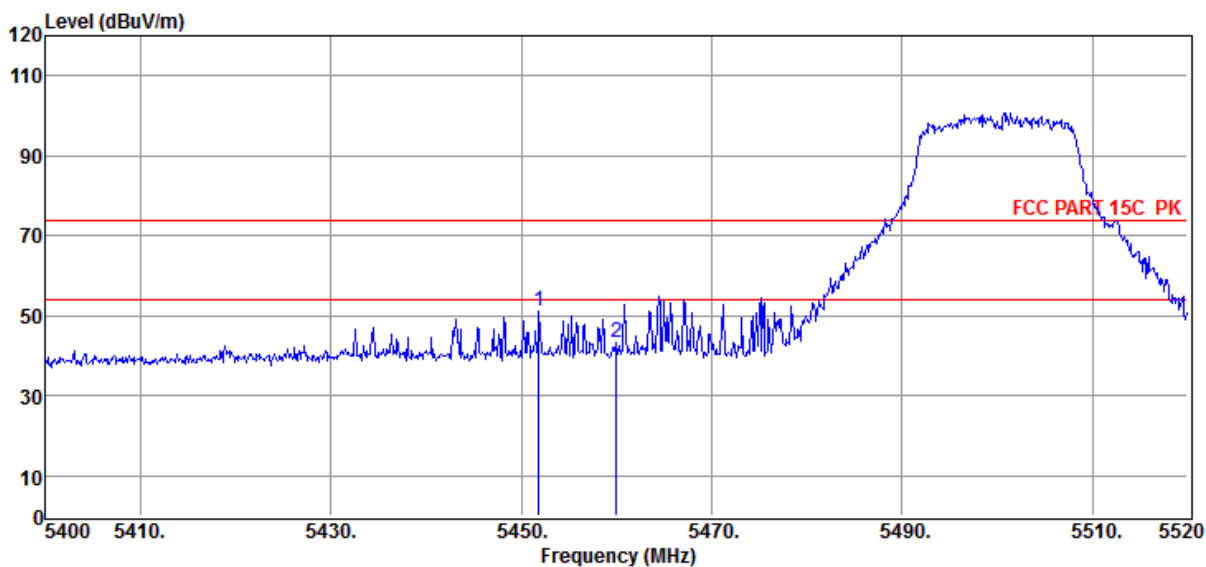

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5451.84	2.23	51.01	74.00	-22.99	186	25	Peak	HORIZONTAL
2	5460.00	2.24	43.43	74.00	-30.57	174	154	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5500MHz

Data: 255

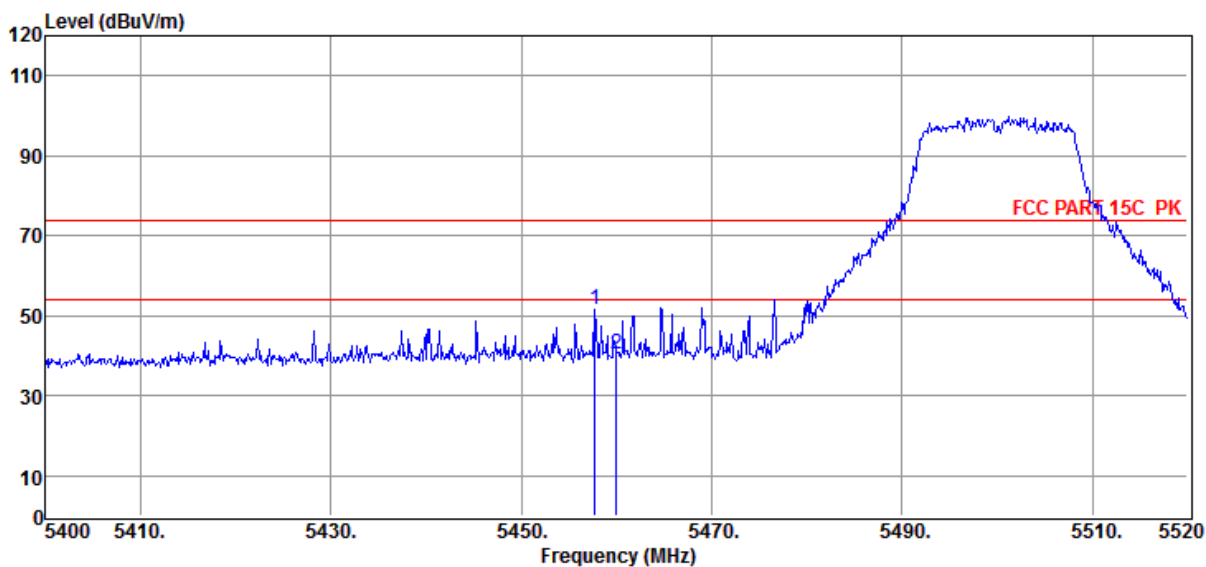

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5457.72	2.24	51.52	74.00	-22.48	156	212	Peak	VERTICAL
2	5460.00	2.24	40.24	74.00	-33.76	175	76	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5745MHz

Data: 256

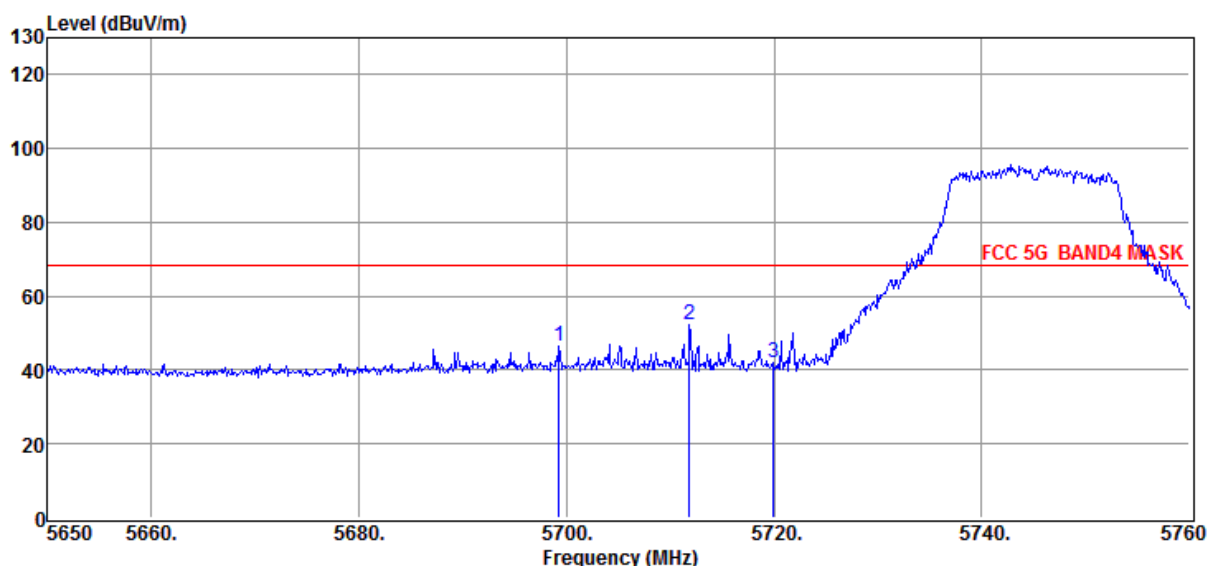

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5699.28	2.92	46.58	68.20	-21.62	182	59	Peak	VERTICAL
2	5711.82	2.86	52.08	68.20	-16.12	176	145	Peak	VERTICAL
3	5720.00	2.81	41.77	68.20	-26.43	162	233	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5745MHZ

Data: 257

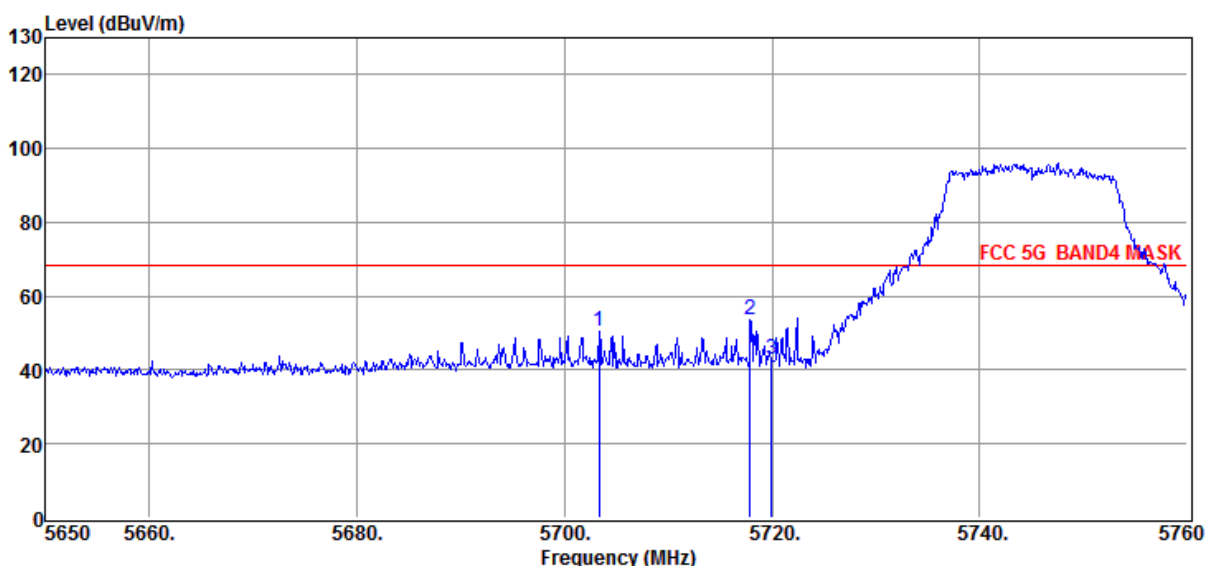

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5703.35	2.90	50.36	68.20	-17.84	176	125	Peak	HORIZONTAL
2	5717.87	2.82	53.50	68.20	-14.70	153	237	Peak	HORIZONTAL
3	5720.00	2.81	42.82	68.20	-25.38	164	24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5825MHz

Data: 258

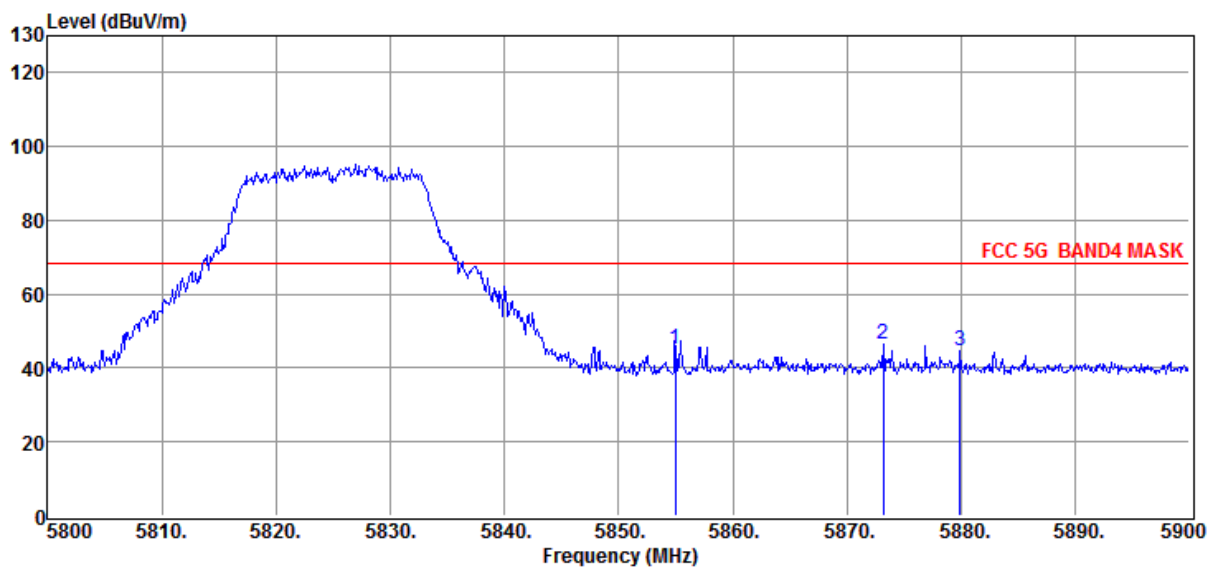

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	44.90	68.20	-23.30	169	249	Peak	VERTICAL
2	5873.20	3.03	46.61	68.20	-21.59	157	324	Peak	VERTICAL
3	5879.90	3.13	44.46	68.20	-23.74	166	12	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5825MHz

Data: 259

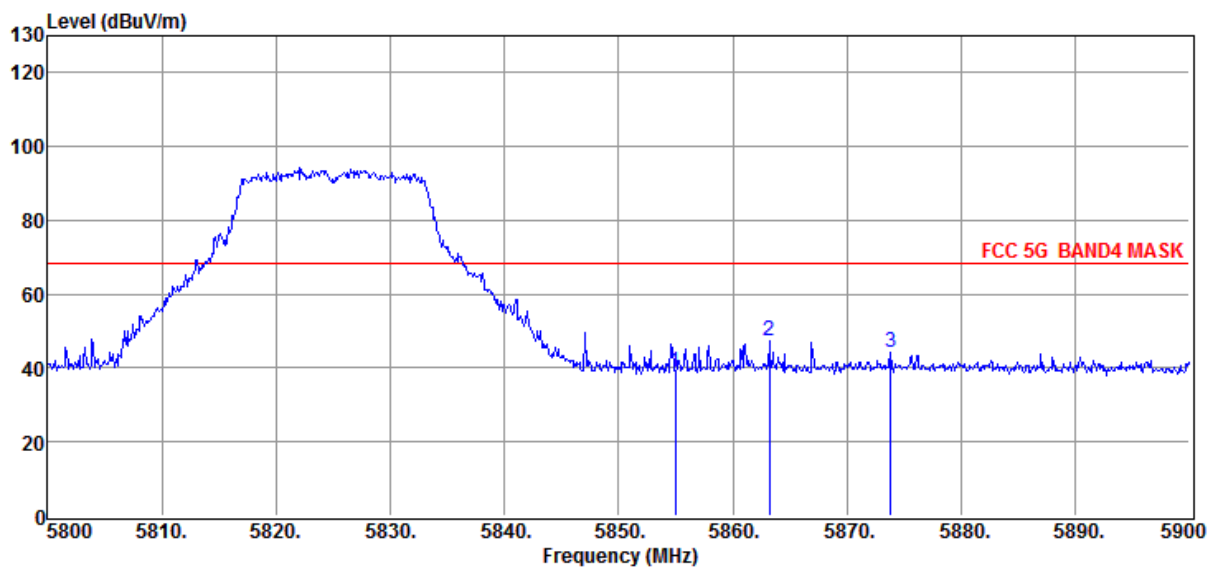

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	38.86	68.20	-29.34	155	122	Peak	HORIZONTAL
2	5863.20	2.88	47.31	68.20	-20.89	165	265	Peak	HORIZONTAL
3	5873.80	3.04	44.21	68.20	-23.99	186	341	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 260

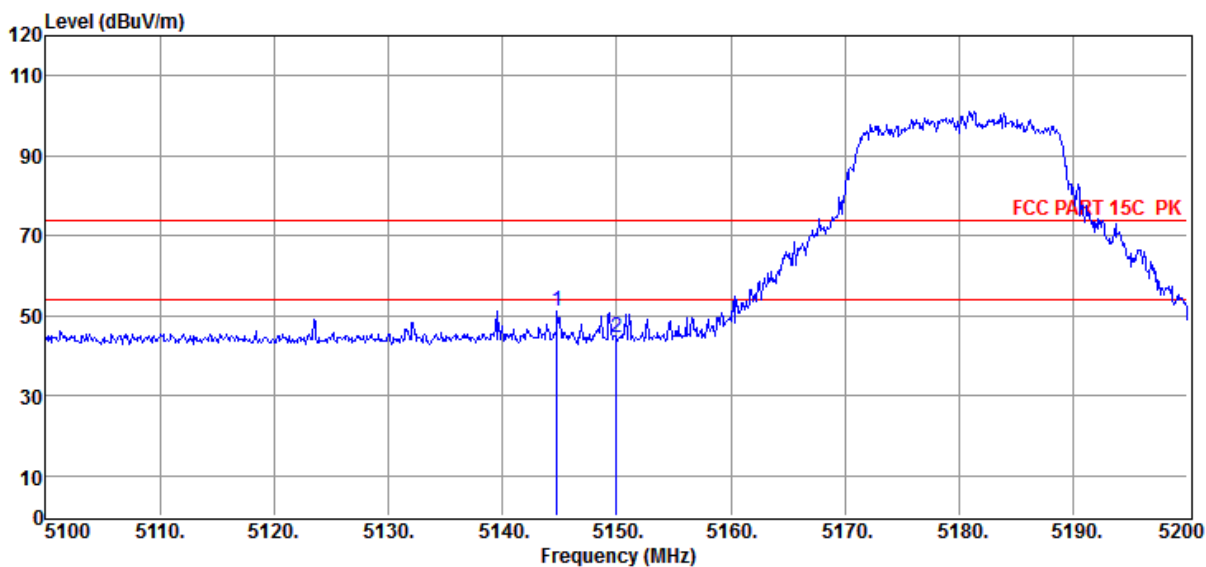

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5144.80	1.52	51.32	74.00	-22.68	153	344	Peak	VERTICAL
2	5150.00	1.50	44.57	74.00	-29.43	166	97	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 261

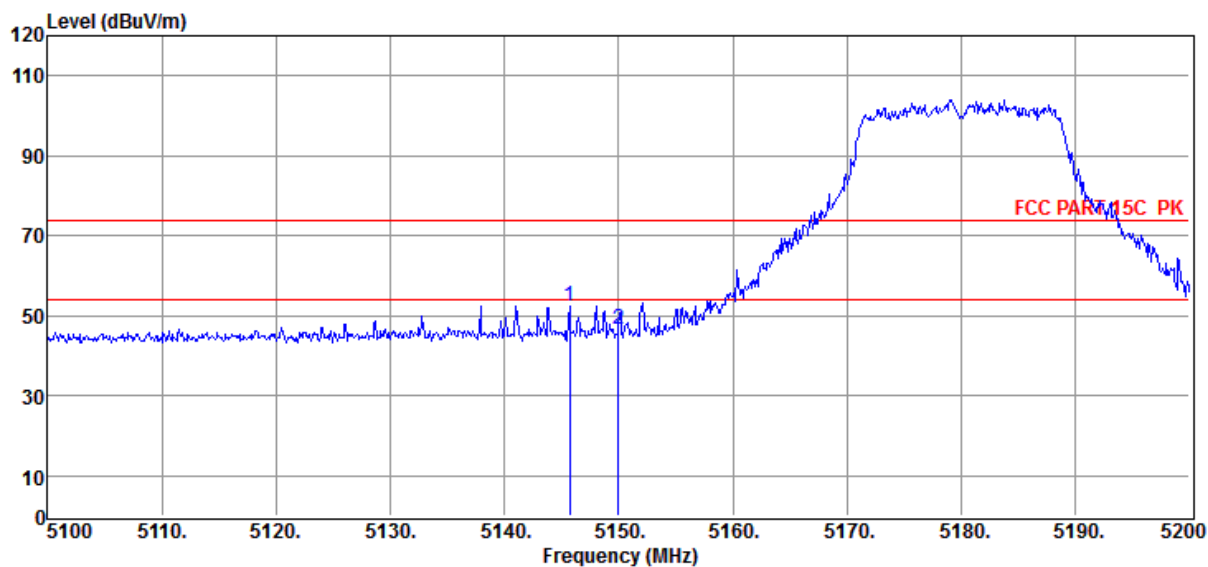

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5145.70	1.52	52.52	74.00	-21.48	184	54	Peak	HORIZONTAL
2	5150.00	1.50	46.57	74.00	-27.43	163	256	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 262

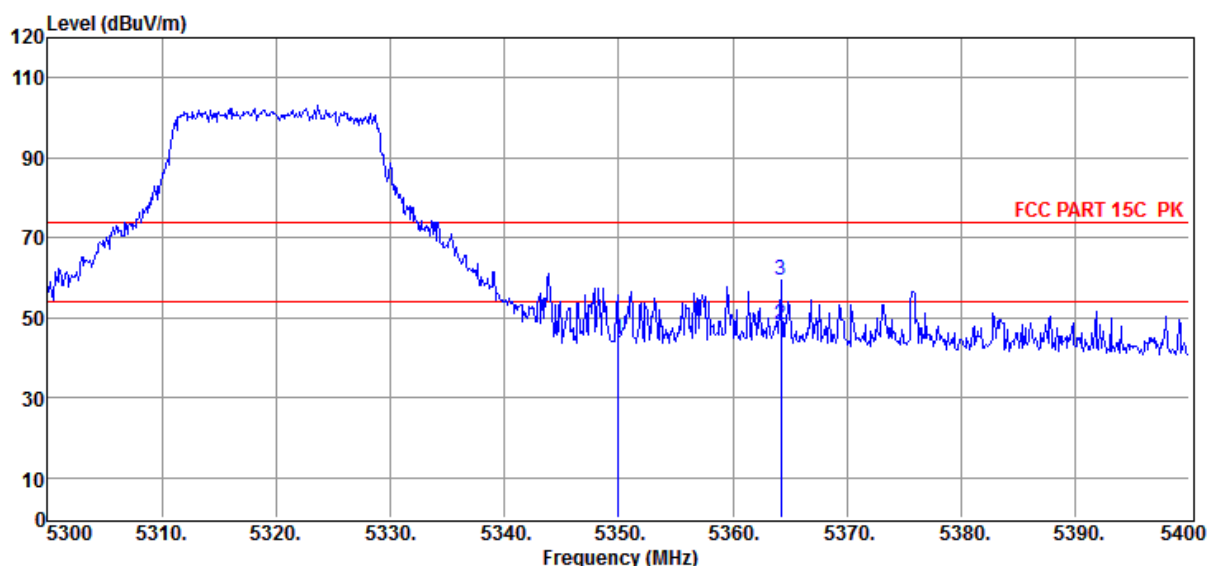

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	44.52	74.00	-29.48	169	143	Peak	HORIZONTAL
2	5364.20	1.78	48.04	54.00	-5.96	159	26	Average	HORIZONTAL
3	5364.20	1.78	59.34	74.00	-14.66	182	344	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 263

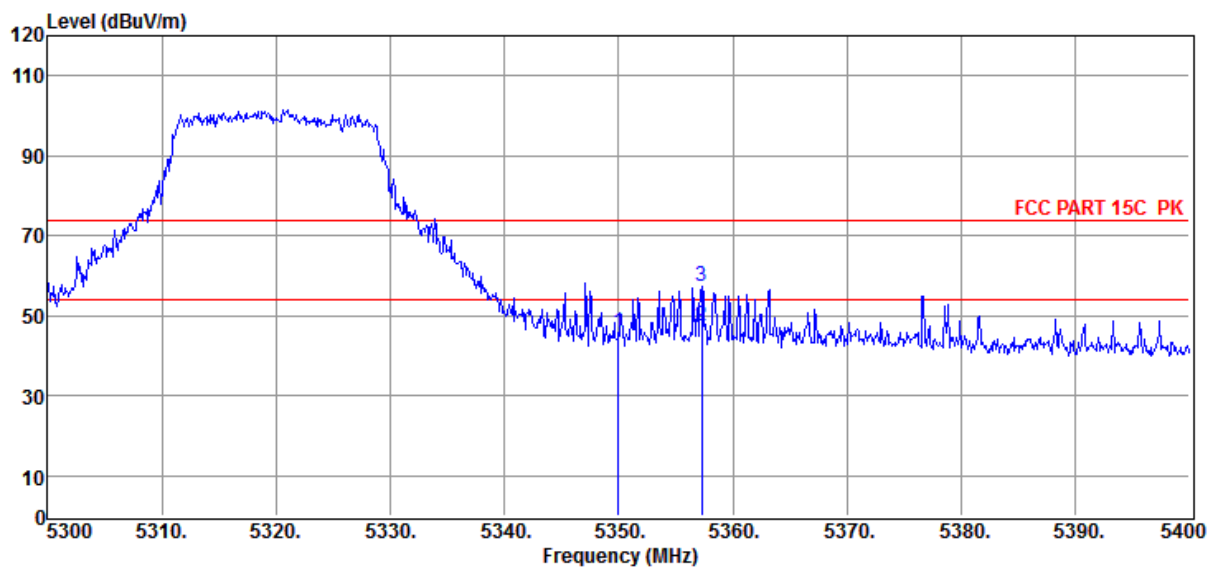

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	45.88	74.00	-28.12	190	182	Peak	VERTICAL
2	5357.30	1.73	47.30	54.00	-6.70	165	354	Average	VERTICAL
3	5357.30	1.73	57.17	74.00	-16.83	174	21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHz

Data: 264

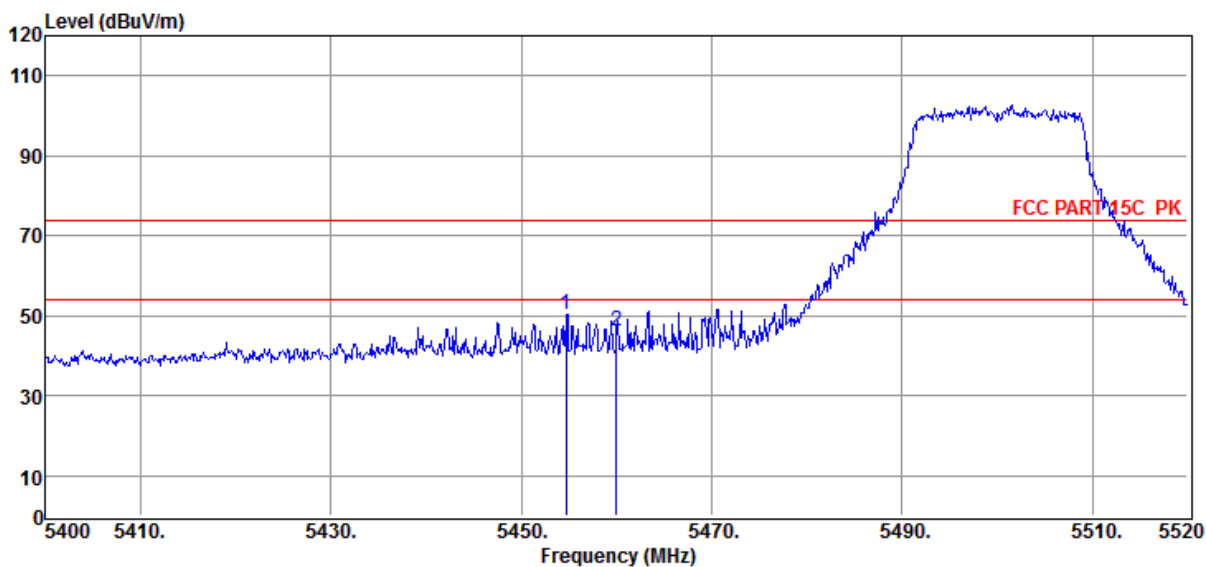

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5454.72	2.24	50.35	74.00	-23.65	166	356	Peak	VERTICAL
2	5460.00	2.24	46.15	74.00	-27.85	158	59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHZ

Data: 265

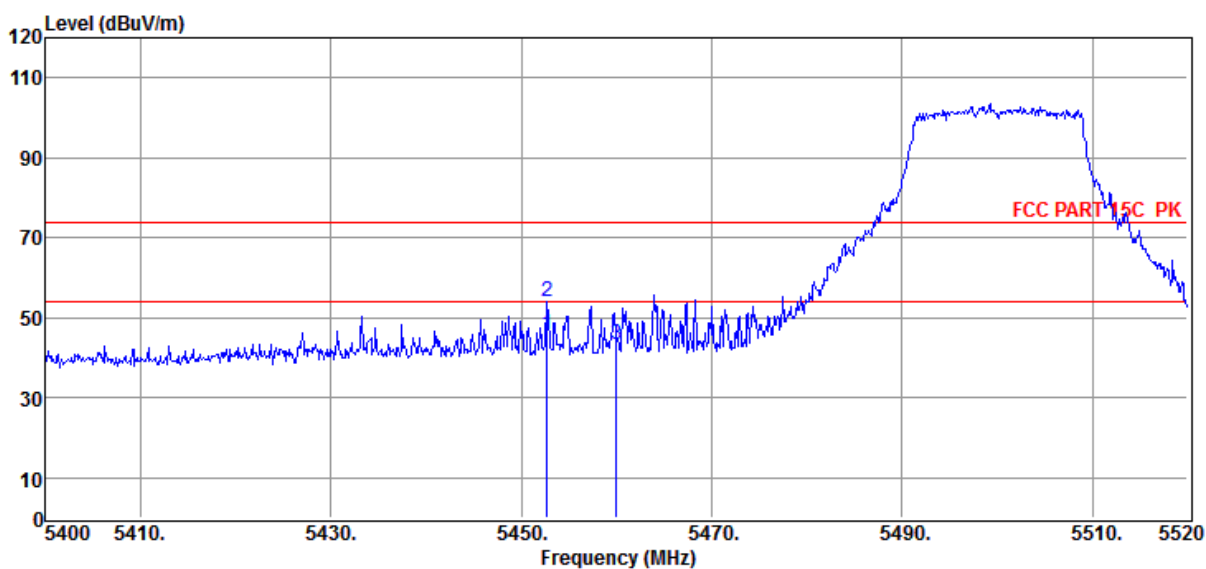

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5452.68	2.23	45.80	54.00	-8.20	179	166	Average	HORIZONTAL
2	5452.68	2.23	53.93	74.00	-20.07	194	143	Peak	HORIZONTAL
3	5460.00	2.24	43.35	74.00	-30.65	183	328	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 266

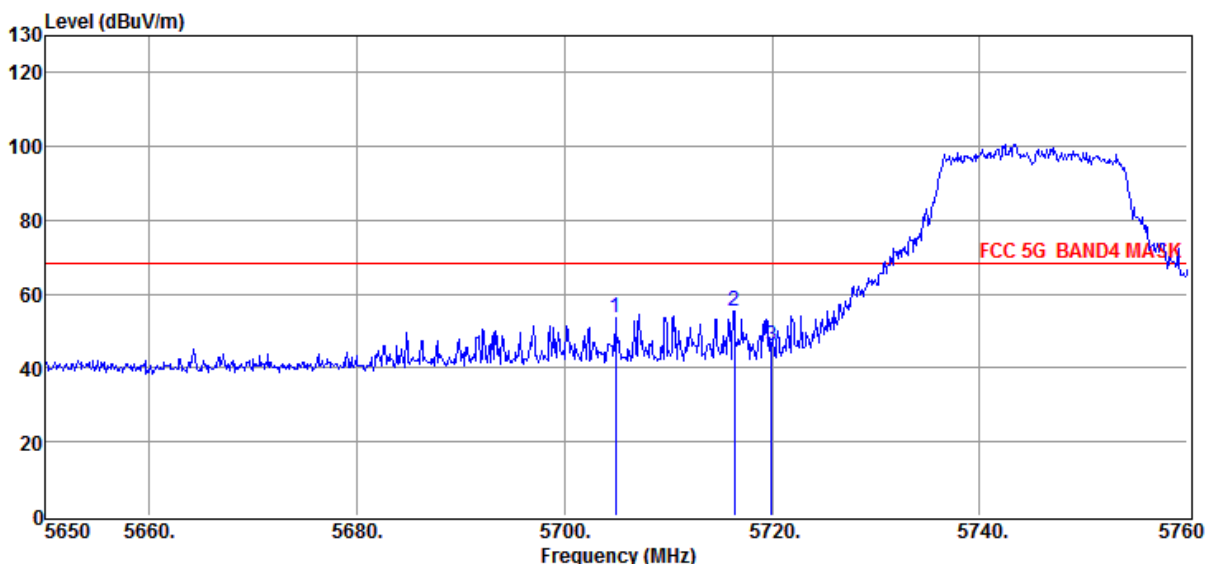

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5704.89	2.89	53.65	68.20	-14.55	188	224	Peak	HORIZONTAL
2	5716.33	2.83	55.58	68.20	-12.62	174	357	Peak	HORIZONTAL
3	5720.00	2.81	45.87	68.20	-22.33	185	64	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 267

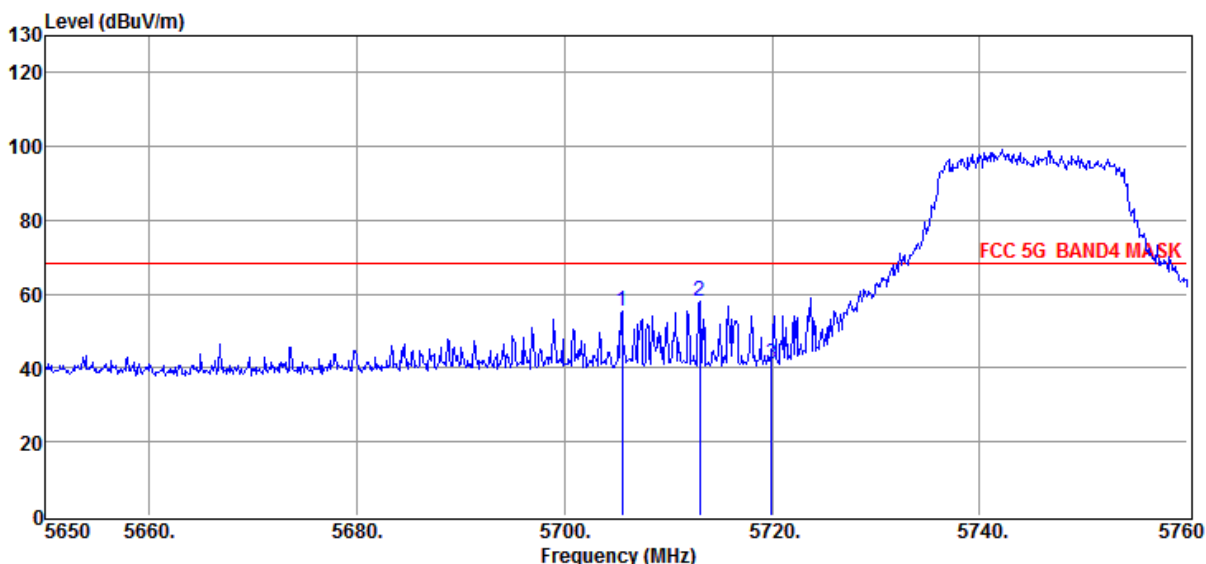

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5705.55	2.89	55.24	68.20	-12.96	163	254	Peak	VERTICAL
2	5713.03	2.85	57.95	68.20	-10.25	185	256	Peak	VERTICAL
3	5720.00	2.81	41.12	68.20	-27.08	167	31	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 268

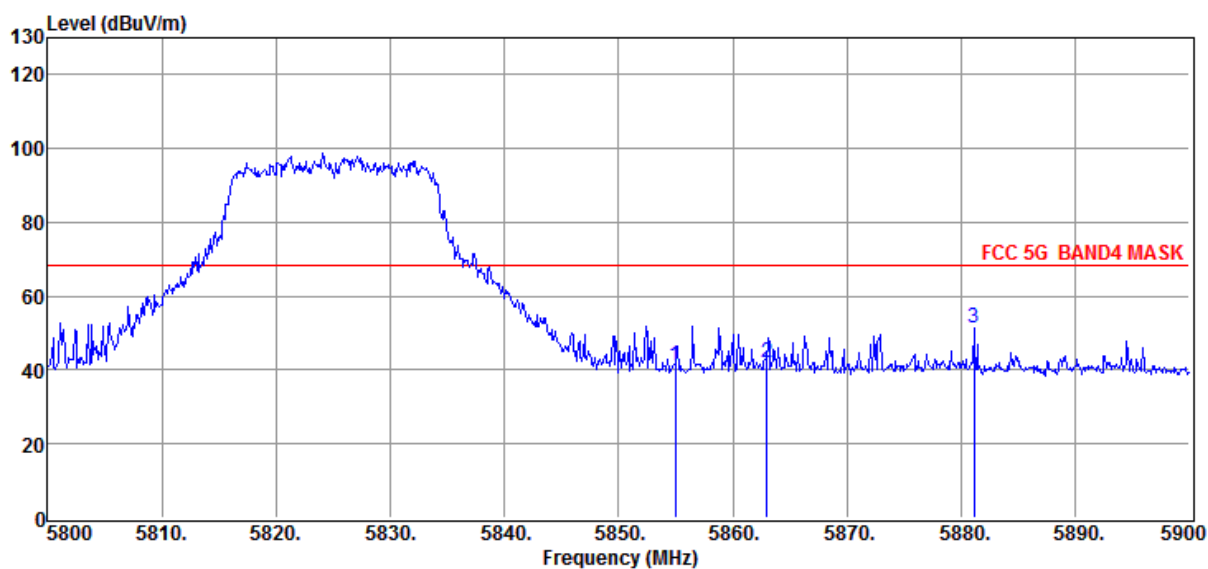

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	41.14	68.20	-27.06	169	25	Peak	VERTICAL
2	5863.00	2.88	41.97	68.20	-26.23	154	63	Peak	VERTICAL
3	5881.10	3.14	51.16	68.20	-17.04	177	322	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 269

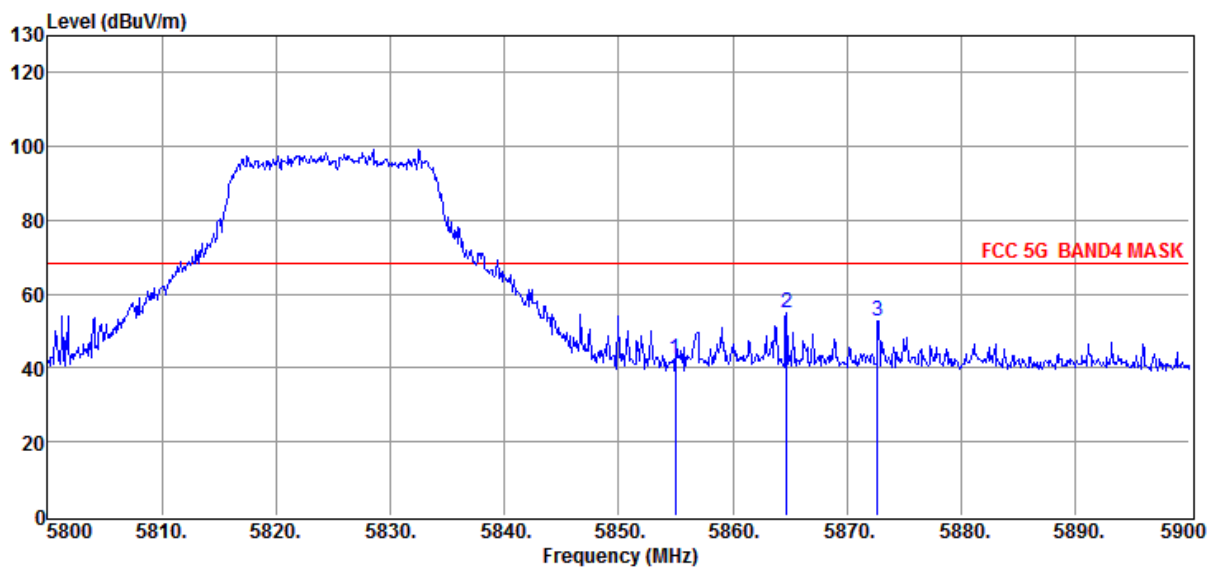

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	42.30	68.20	-25.90	145	255	Peak	HORIZONTAL
2	5864.70	2.90	54.73	68.20	-13.47	159	347	Peak	HORIZONTAL
3	5872.70	3.02	52.69	68.20	-15.51	165	56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 270

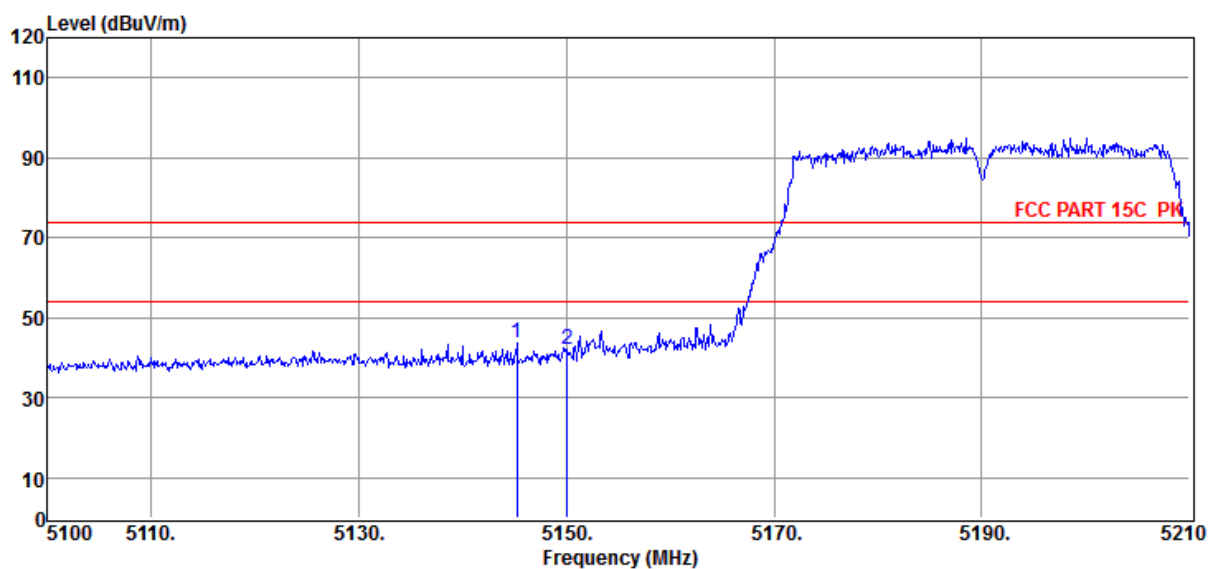

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5145.21	1.52	43.58	74.00	-30.42	168	26	Peak	VERTICAL
2	5150.00	1.50	41.90	74.00	-32.10	153	74	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 271

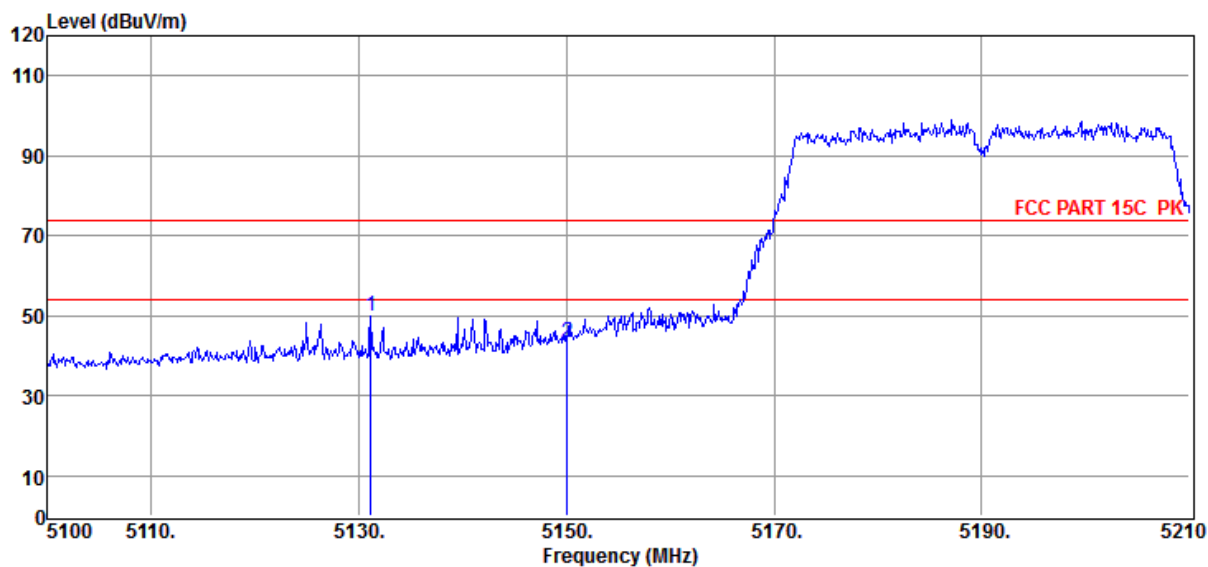

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5131.13	1.59	50.05	74.00	-23.95	162	351	Peak	HORIZONTAL
2	5150.00	1.50	43.50	74.00	-30.50	185	274	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 272

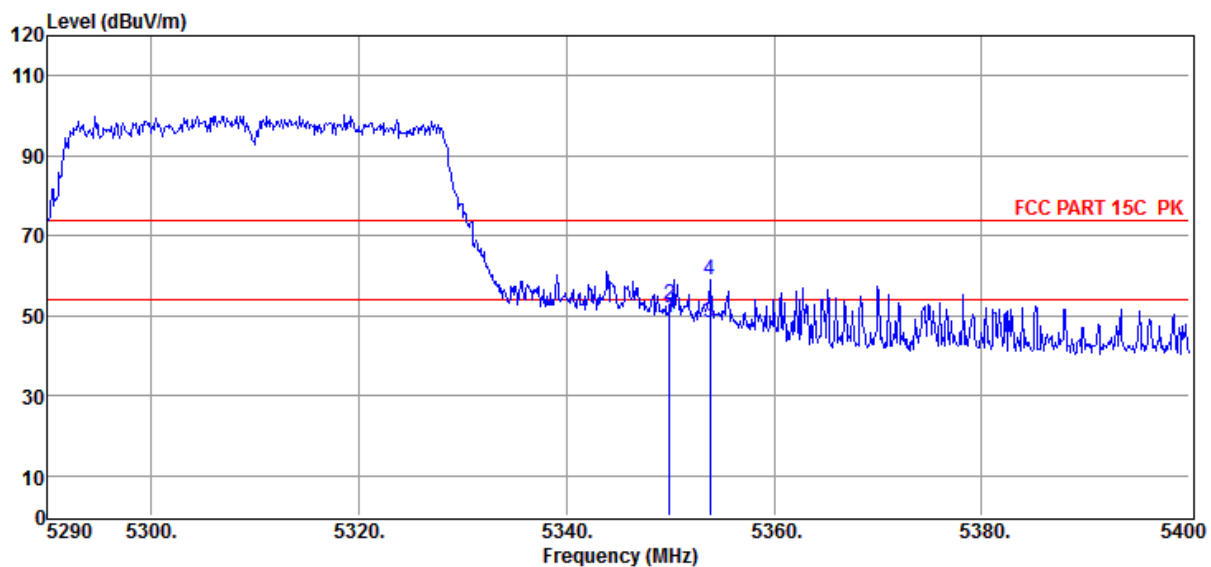

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	49.45	54.00	-4.55	155	25	Average	VERTICAL
2	5350.00	1.68	52.60	74.00	-21.40	167	56	Peak	VERTICAL
3	5353.80	1.71	48.38	54.00	-5.62	185	348	Average	VERTICAL
4	5353.80	1.71	58.89	74.00	-15.11	191	124	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 273

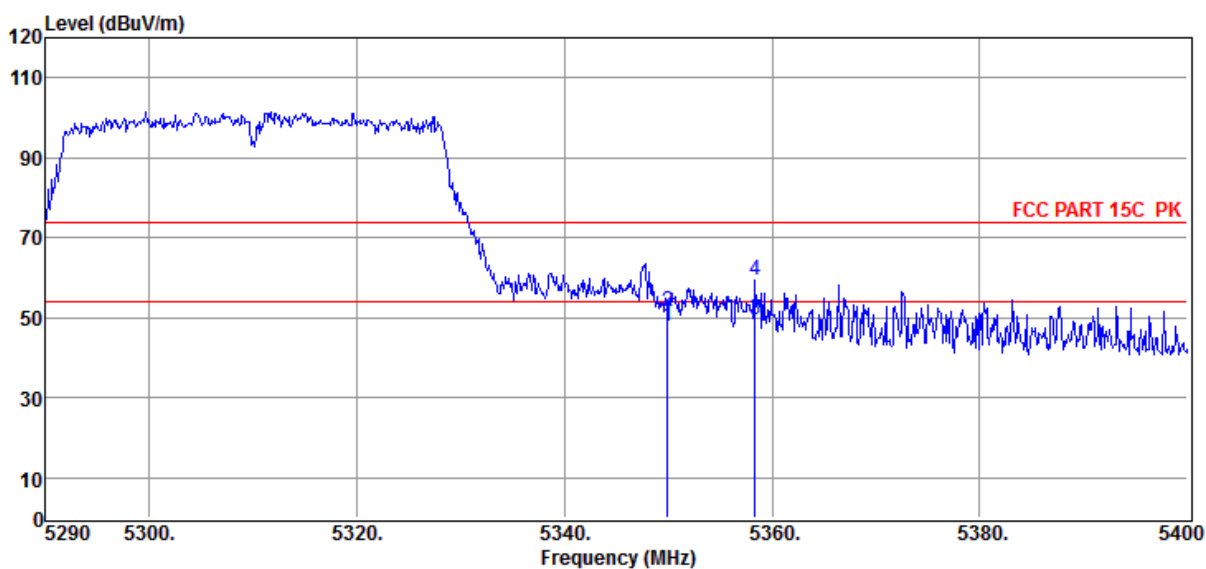

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	47.95	54.00	-6.05	179	25	Average	HORIZONTAL
2	5350.00	1.68	51.74	74.00	-22.26	167	346	Peak	HORIZONTAL
3	5358.31	1.73	49.40	54.00	-4.60	152	259	Average	HORIZONTAL
4	5358.31	1.73	59.33	74.00	-14.67	194	375	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 274

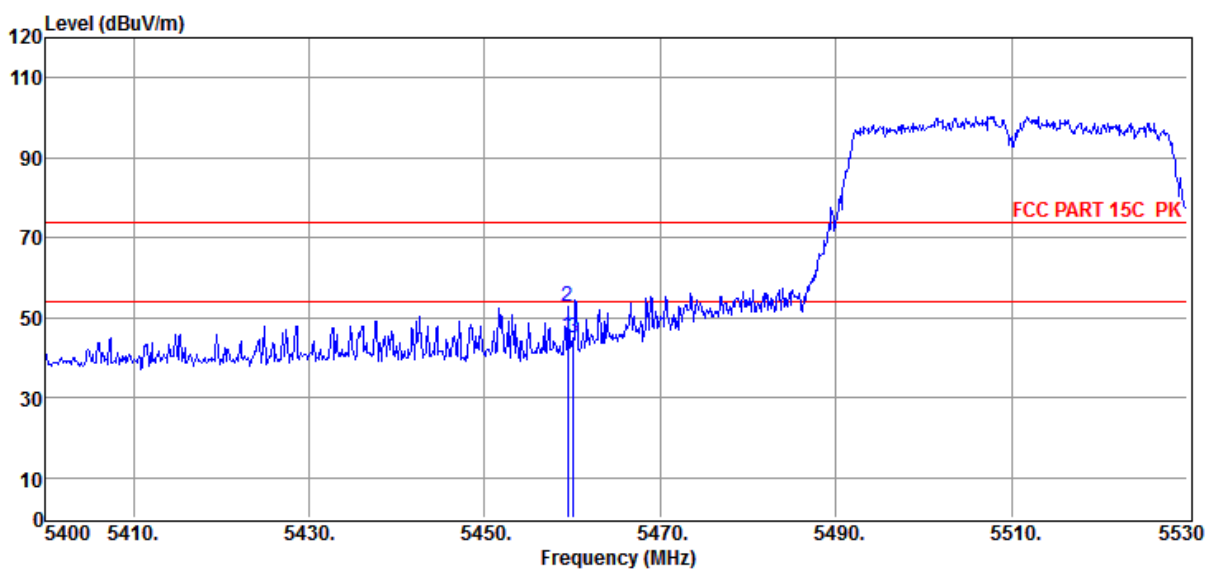

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5459.41	2.24	45.51	54.00	-8.49	158	59	Average	VERTICAL
2	5459.41	2.24	52.63	74.00	-21.37	175	360	Peak	VERTICAL
3	5460.00	2.24	44.83	74.00	-29.17	166	24	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 275

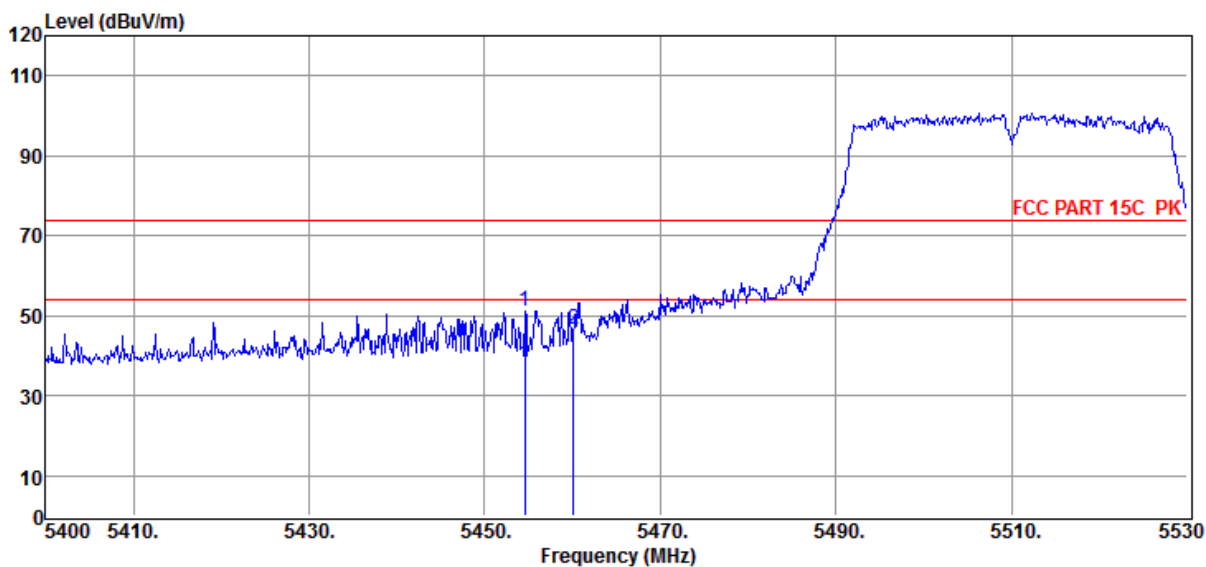

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5454.60	2.24	51.23	74.00	-22.77	155	264	Peak	HORIZONTAL
2	5460.00	2.24	46.47	74.00	-27.53	186	279	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHZ

Data: 310

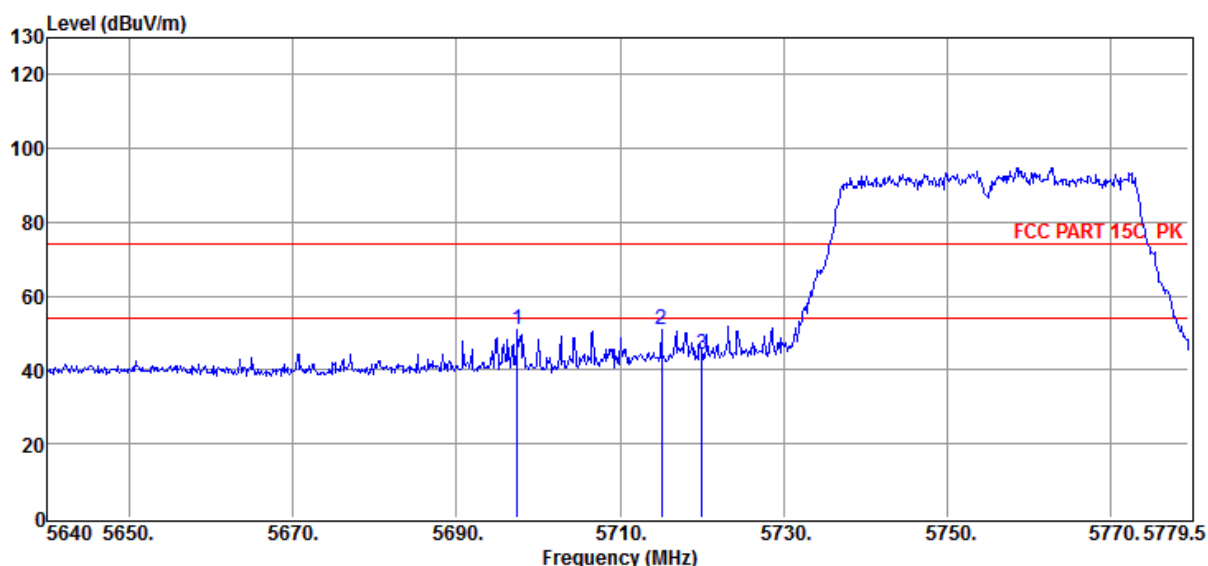

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5697.47	2.90	50.79	74.00	-23.21	188	346	Peak	VERTICAL
2	5715.05	2.84	51.14	74.00	-22.86	183	228	Peak	VERTICAL
3	5720.00	2.81	44.38	74.00	-29.62	166	100	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHz

Data: 311

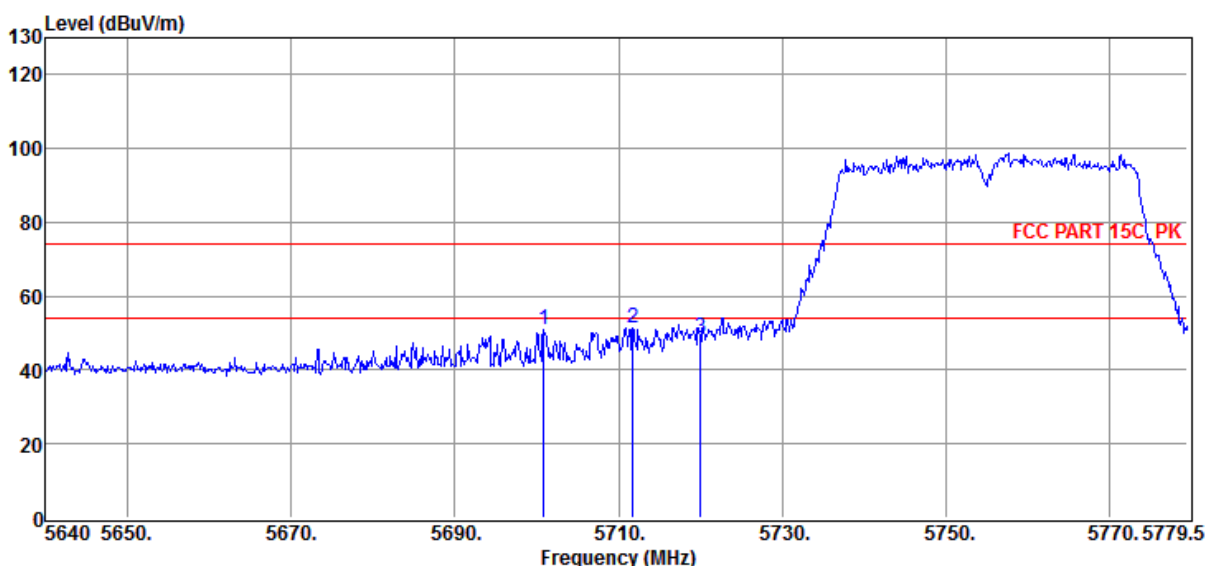

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5700.82	2.91	50.78	74.00	-23.22	155	59	Peak	HORIZONTAL
2	5711.70	2.86	51.43	74.00	-22.57	170	108	Peak	HORIZONTAL
3	5720.00	2.81	48.74	74.00	-25.26	179	255	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 316

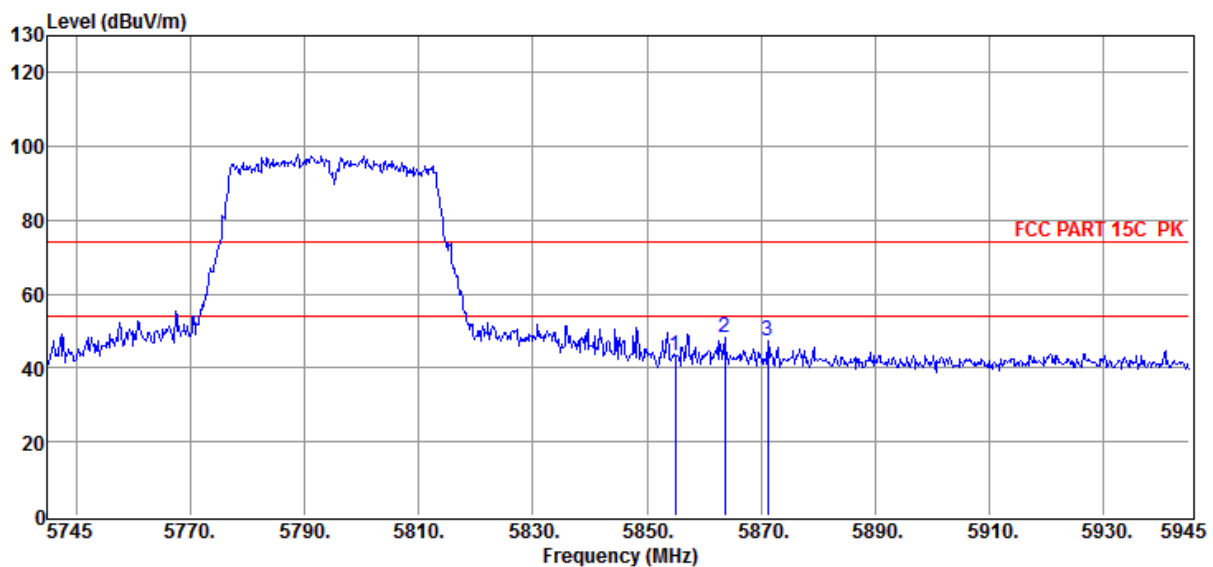

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	43.35	74.00	-30.65	169	293	Peak	HORIZONTAL
2	5863.60	2.88	48.22	74.00	-25.78	167	153	Peak	HORIZONTAL
3	5871.20	2.99	47.32	74.00	-26.68	186	61	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 317

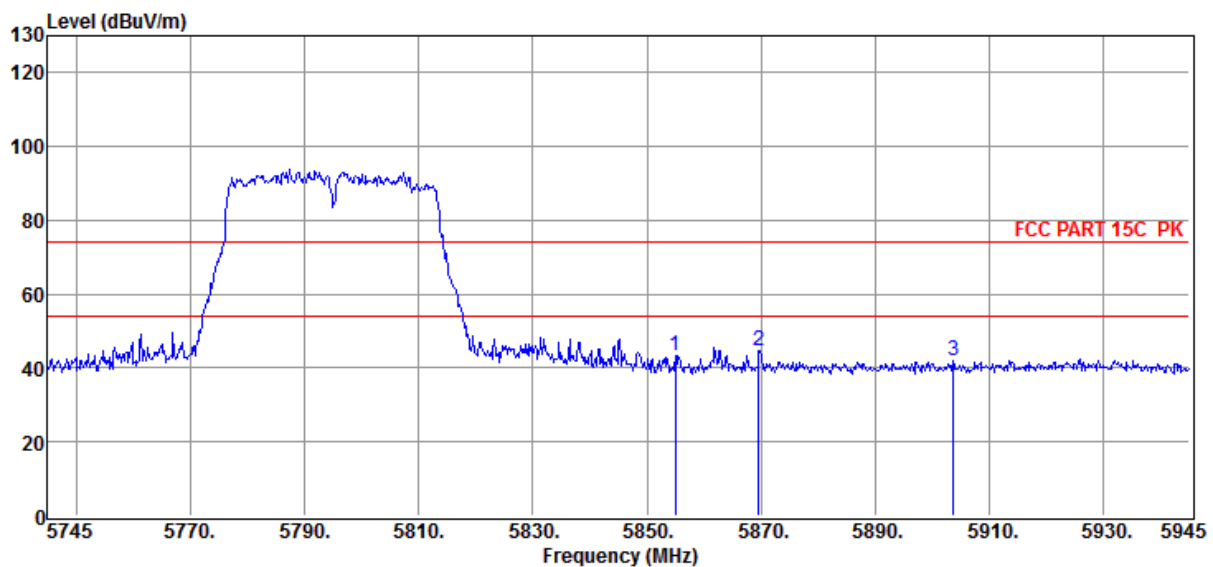

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	43.44	74.00	-30.56	150	276	Peak	VERTICAL
2	5869.60	2.98	44.82	74.00	-29.18	190	26	Peak	VERTICAL
3	5903.60	3.41	41.96	74.00	-32.04	167	167	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHz

Data: 280

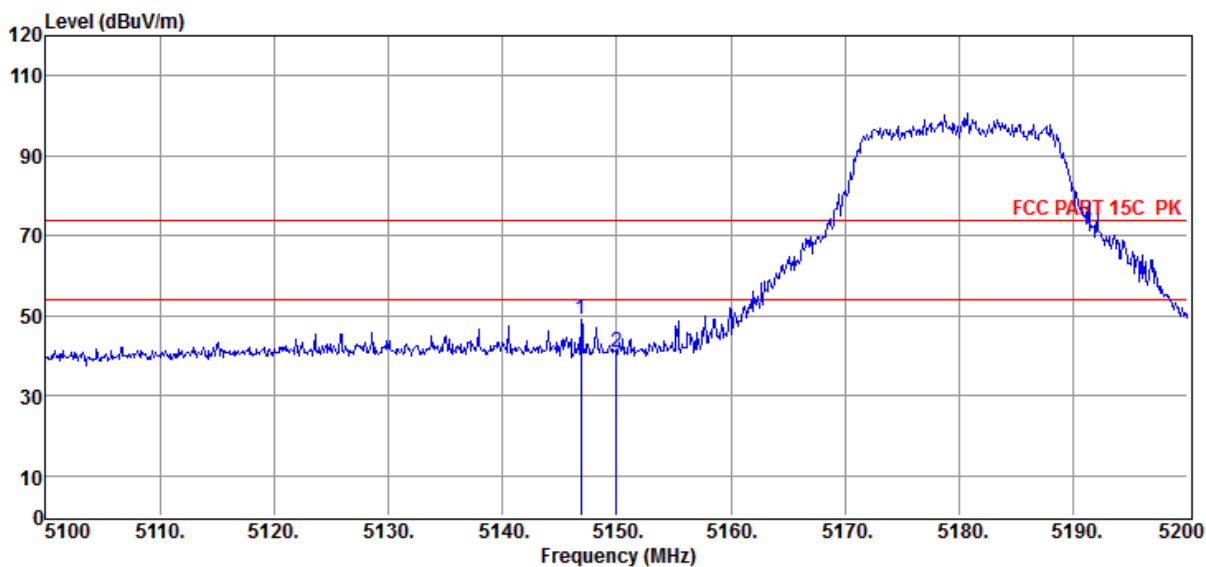

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5146.90	1.51	49.05	74.00	-24.95	160	203	Peak	VERTICAL
2	5150.00	1.50	40.70	74.00	-33.30	152	394	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHz

Data: 281

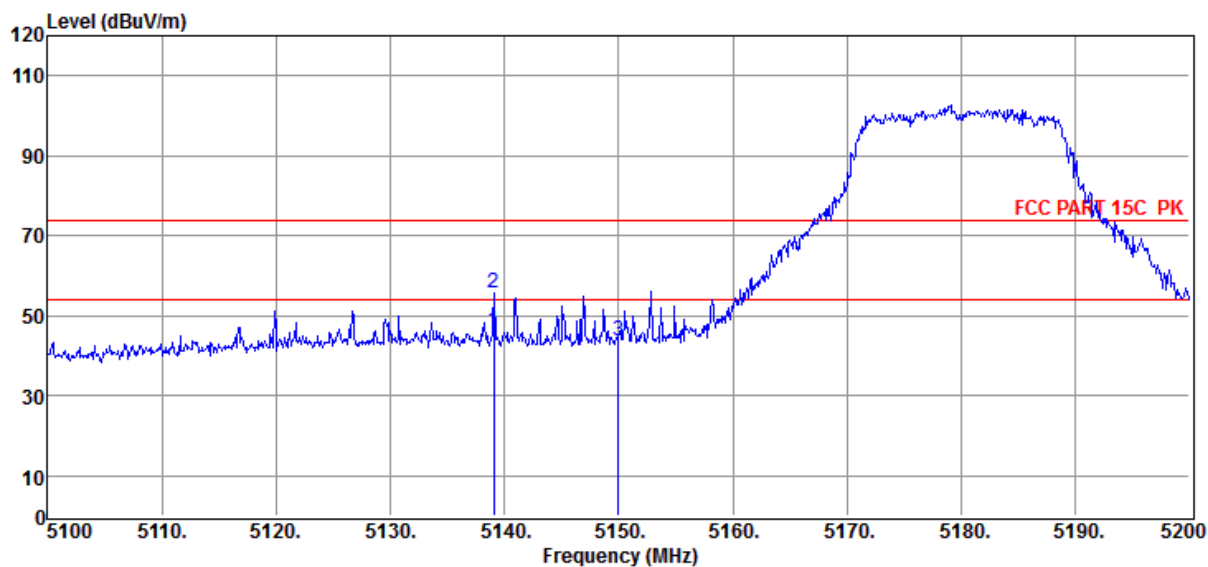

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5139.10	1.55	46.32	54.00	-7.68	156	59	Average	HORIZONTAL
2	5139.10	1.55	55.68	74.00	-18.32	186	55	Peak	HORIZONTAL
3	5150.00	1.50	43.89	74.00	-30.11	174	237	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5310MHz

Data: 282

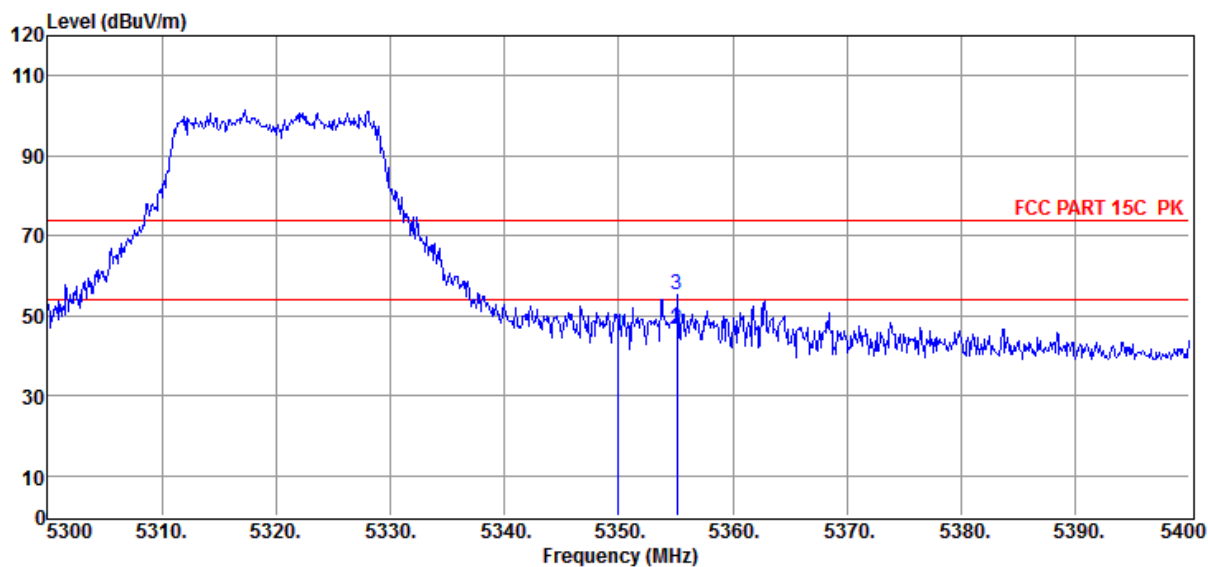

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	45.21	74.00	-28.79	169	105	Peak	HORIZONTAL
2	5355.10	1.71	46.68	54.00	-7.32	152	136	Average	HORIZONTAL
3	5355.10	1.71	55.06	74.00	-18.94	168	240	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5310MHz

Data: 283

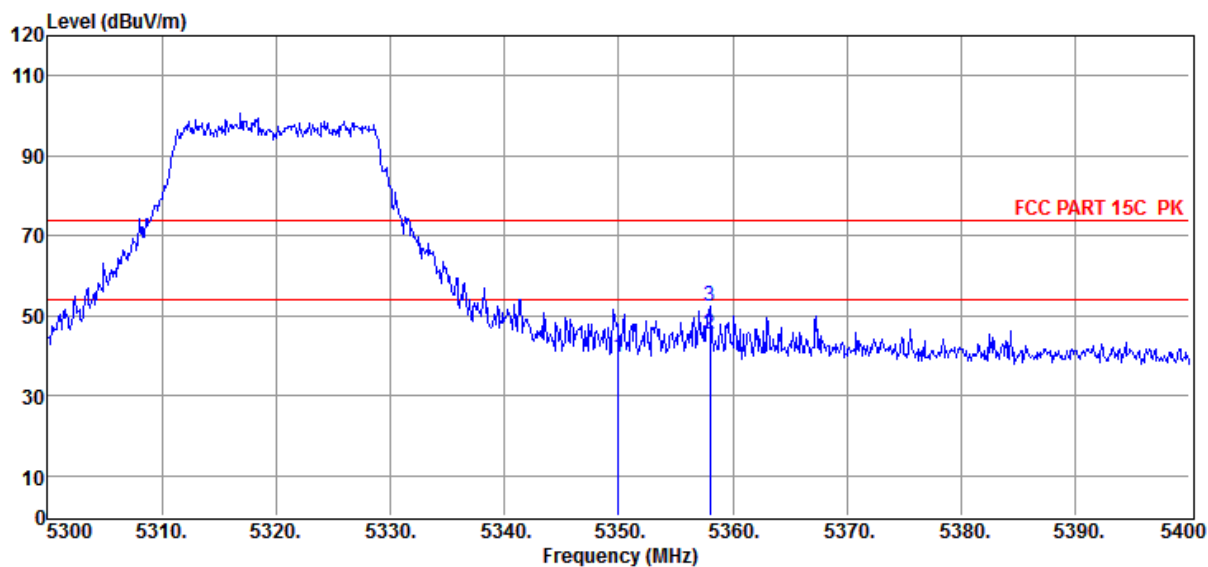

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	39.64	74.00	-34.36	177	245	Peak	VERTICAL
2	5358.00	1.73	45.50	54.00	-8.50	185	208	Average	VERTICAL
3	5358.00	1.73	52.33	74.00	-21.67	164	344	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHz

Data: 284

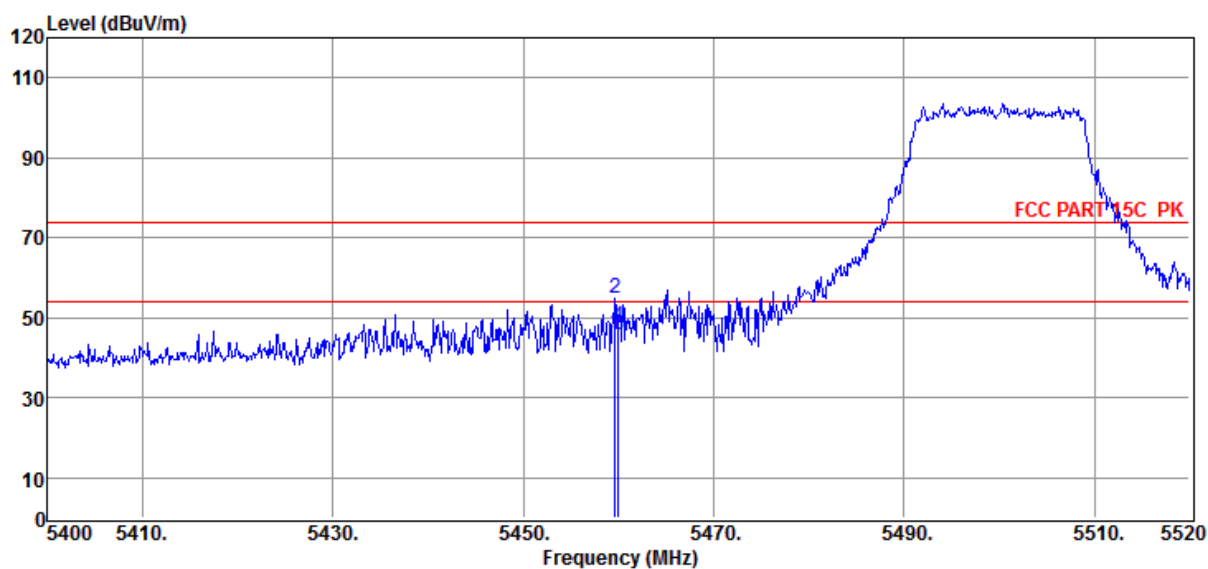

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5459.64	2.24	46.21	54.00	-7.79	186	306	Average	HORIZONTAL
2	5459.64	2.24	55.01	74.00	-18.99	163	256	Peak	HORIZONTAL
3	5460.00	2.24	45.81	54.00	-8.19	154	21	Average	HORIZONTAL
4	5460.00	2.24	47.86	74.00	-26.14	173	349	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHz

Data: 285

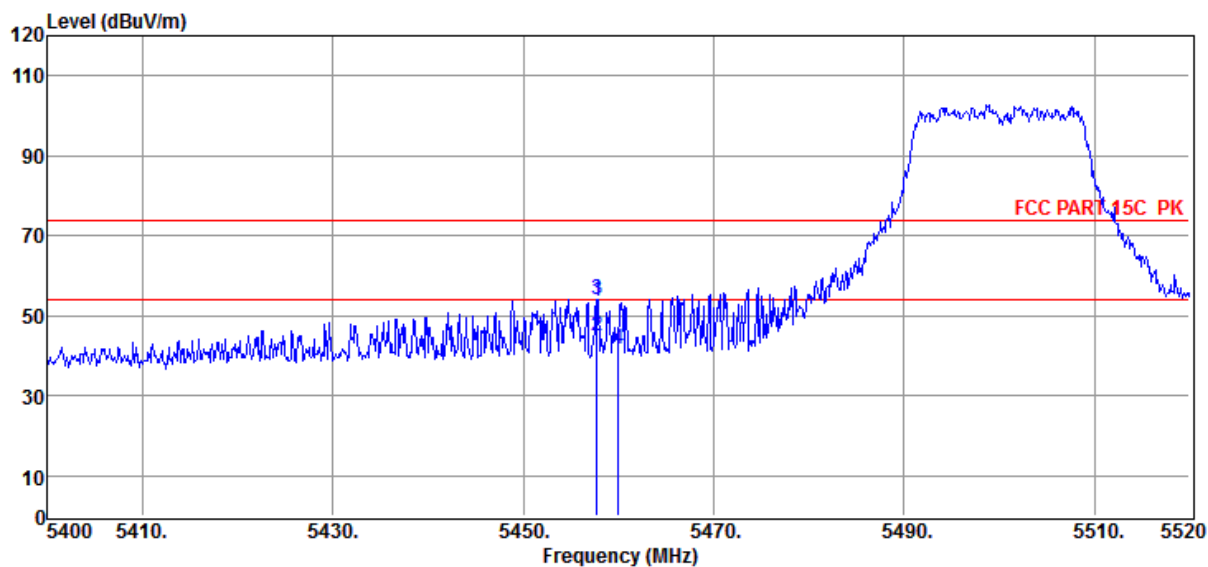

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5457.72	2.24	53.81	54.00	-0.19	167	53	Average	VERTICAL
2	5457.72	2.24	44.81	54.00	-9.19	155	209	Average	VERTICAL
3	5457.72	2.24	54.09	74.00	-19.91	186	341	Peak	VERTICAL
4	5460.00	2.24	41.53	74.00	-32.47	182	11	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5745MHz

Data: 286

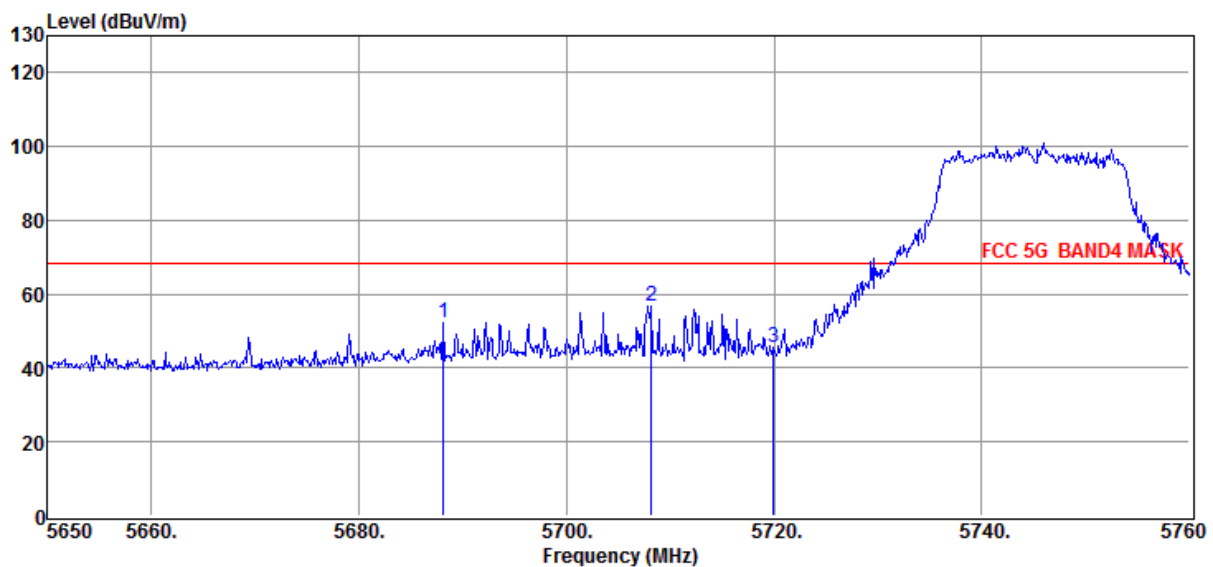

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5688.17	2.85	52.11	68.20	-16.09	164	25	Peak	HORIZONTAL
2	5708.19	2.87	56.94	68.20	-11.26	173	96	Peak	HORIZONTAL
3	5720.00	2.81	45.44	68.20	-22.76	186	46	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 ANT1+ANT2 5745MHz

Data: 287

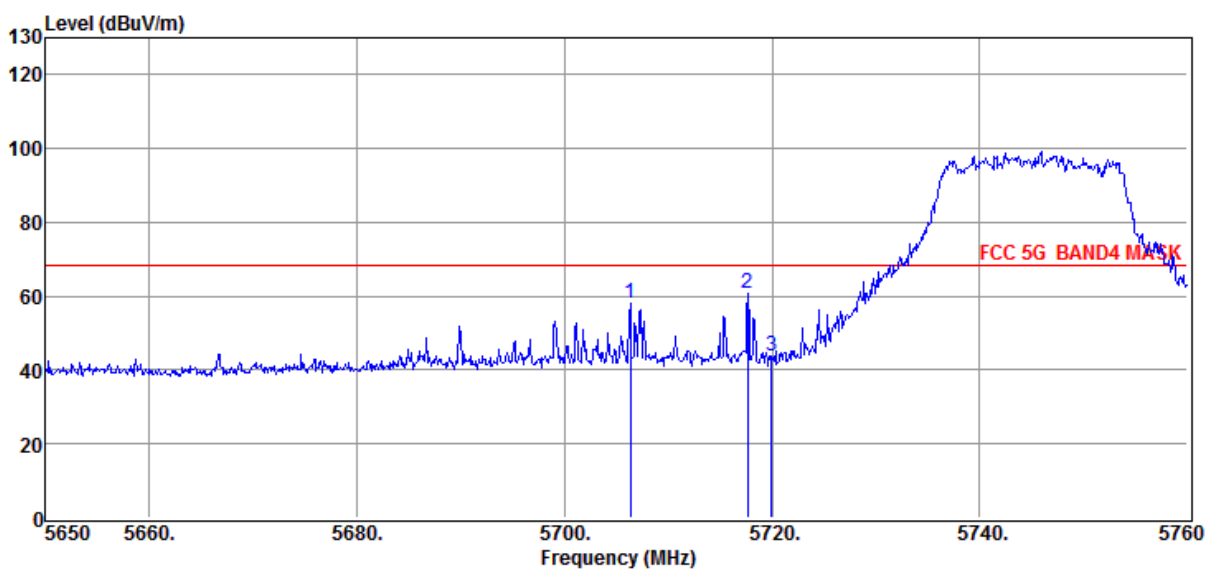

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5706.32	2.89	57.91	68.20	-10.29	163	165	Peak	VERTICAL
2	5717.65	2.82	60.78	68.20	-7.42	190	268	Peak	VERTICAL
3	5720.00	2.81	43.85	68.20	-24.35	153	256	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHz

Data: 288

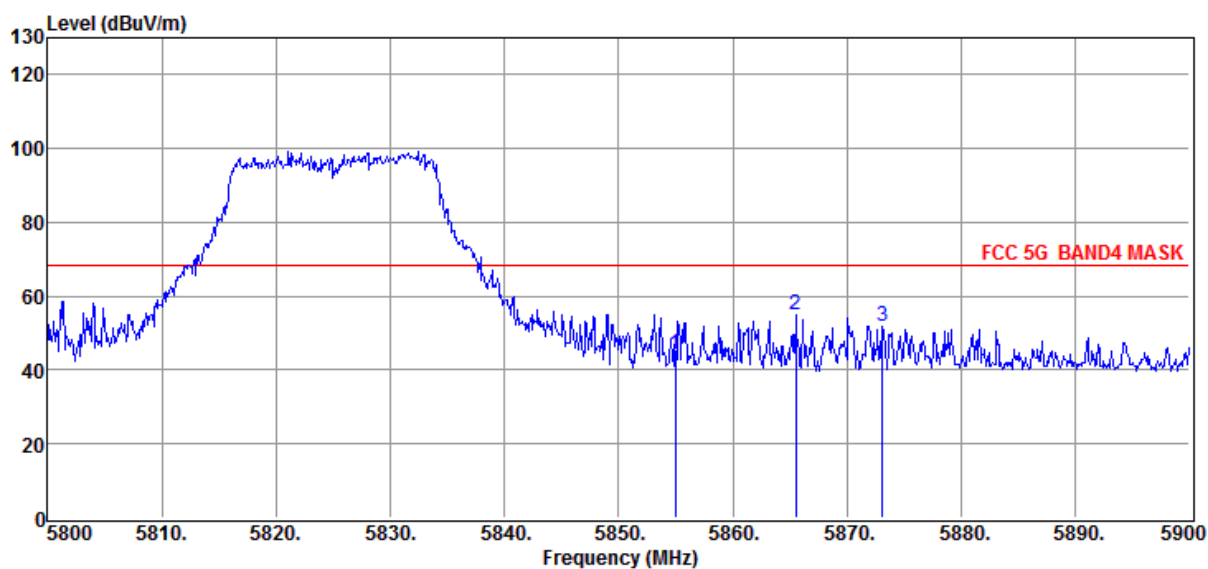

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	44.04	68.20	-24.16	176	52	Peak	HORIZONTAL
2	5865.50	2.92	54.80	68.20	-13.40	184	324	Peak	HORIZONTAL
3	5873.10	3.03	51.69	68.20	-16.51	183	209	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHz

Data: 289

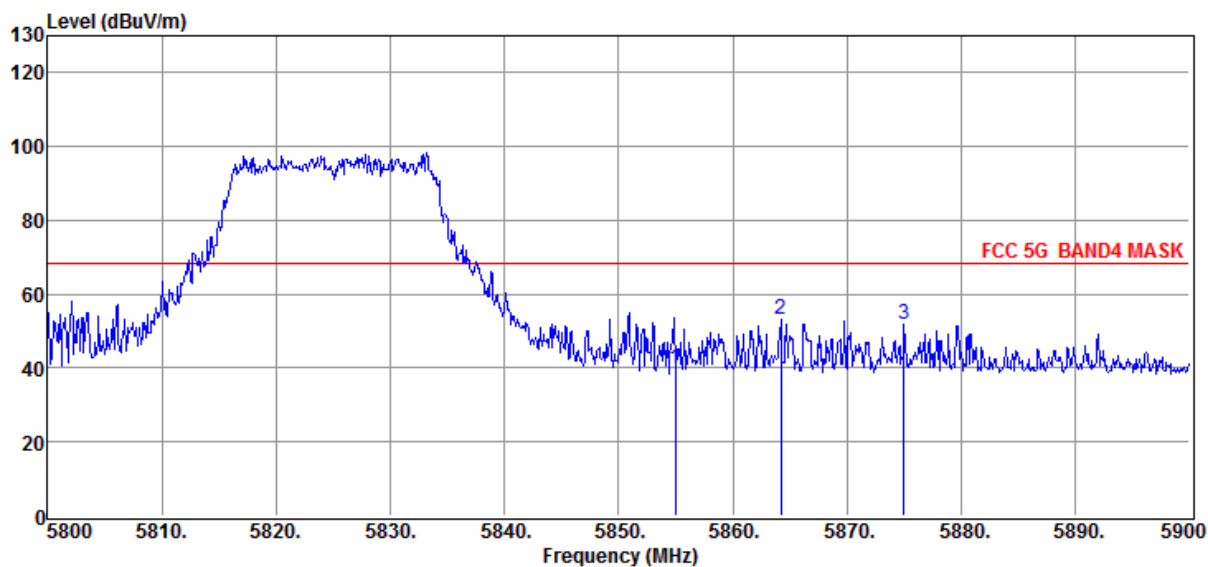

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	39.82	68.20	-28.38	179	234	Peak	VERTICAL
2	5864.20	2.89	53.03	68.20	-15.17	186	51	Peak	VERTICAL
3	5875.00	3.05	51.83	68.20	-16.37	157	152	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHz

Data: 290

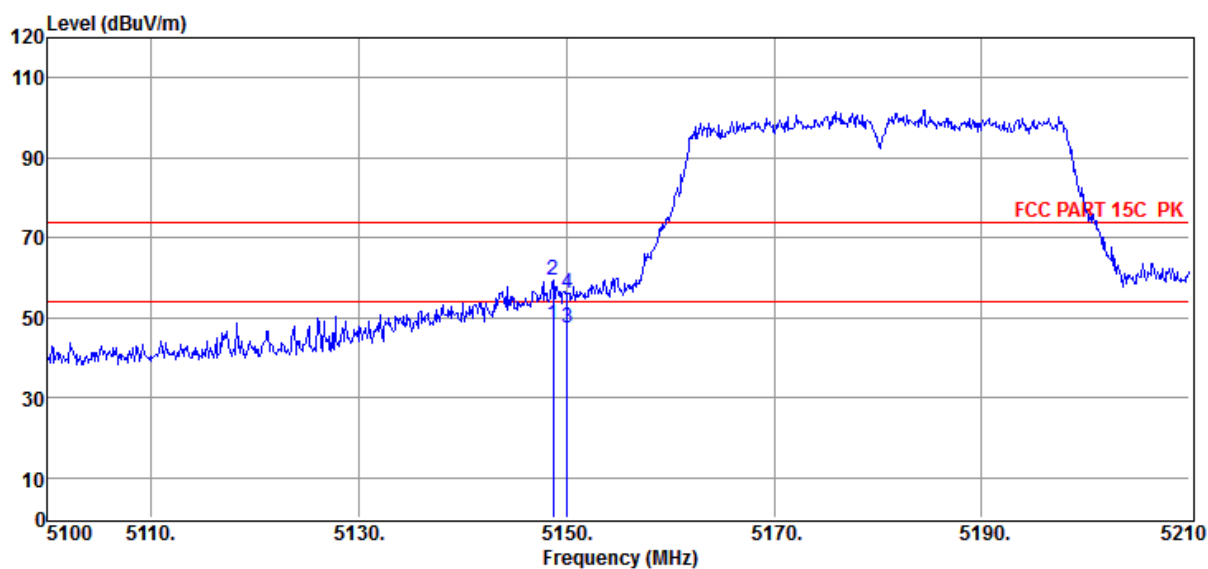

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5148.73	1.51	48.28	54.00	-5.72	175	134	Average	HORIZONTAL
2	5148.73	1.51	59.52	74.00	-14.48	182	108	Peak	HORIZONTAL
3	5150.00	1.50	47.37	54.00	-6.63	158	344	Average	HORIZONTAL
4	5150.00	1.50	55.99	74.00	-18.01	163	23	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHZ

Data: 291

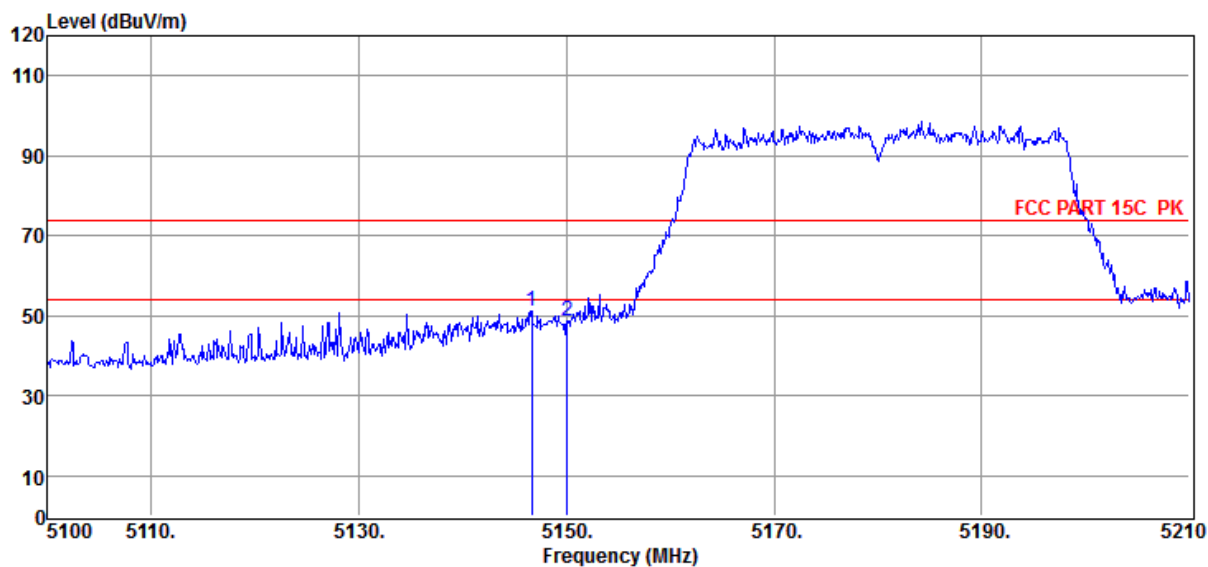

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5146.64	1.51	51.30	74.00	-22.70	151	56	Peak	VERTICAL
2	5150.00	1.50	48.63	74.00	-25.37	184	332	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHz

Data: 292

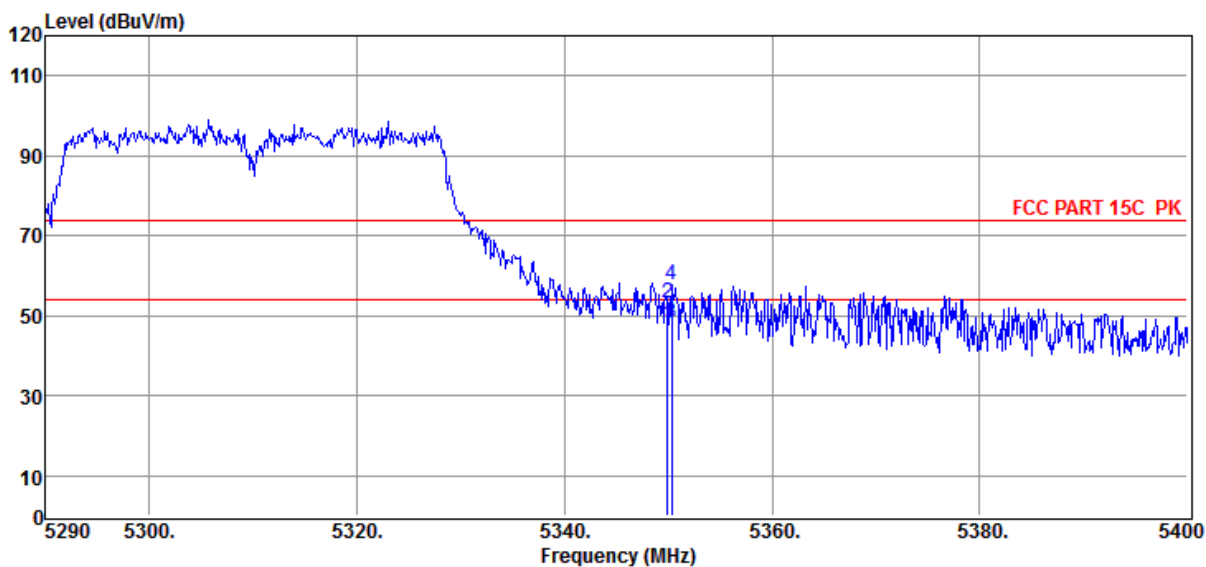

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5349.95	1.68	47.75	54.00	-6.25	169	325	Average	VERTICAL
2	5349.95	1.68	53.32	74.00	-20.68	183	106	Peak	VERTICAL
3	5350.00	1.68	48.15	54.00	-5.85	188	223	Average	VERTICAL
4	5350.00	1.68	57.53	74.00	-16.47	154	16	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHz

Data: 293

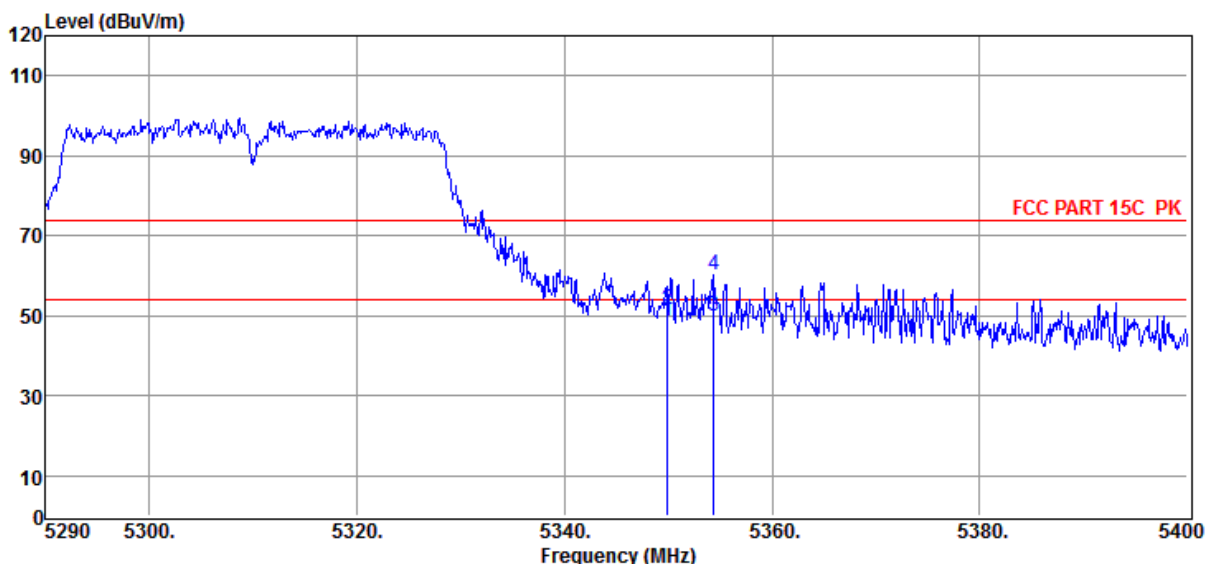

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5349.95	1.68	48.65	54.00	-5.35	168	23	Average	HORIZONTAL
2	5349.95	1.68	51.44	74.00	-22.56	190	346	Peak	HORIZONTAL
3	5350.00	1.71	49.88	54.00	-4.12	182	251	Average	HORIZONTAL
4	5350.00	1.71	60.27	74.00	-13.73	155	121	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHz

Data: 294

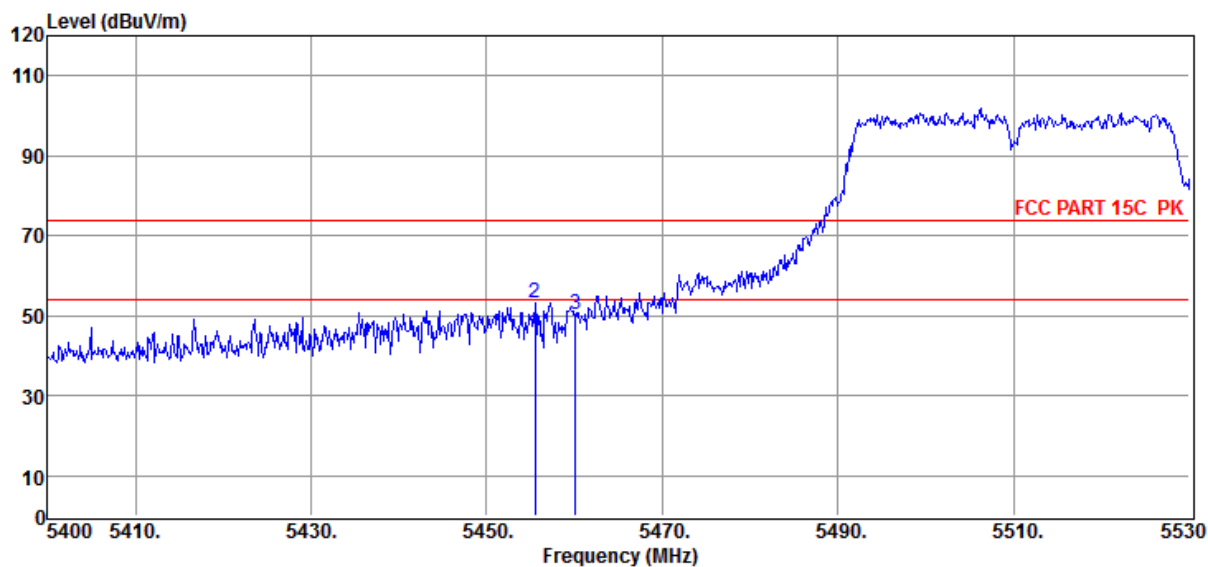

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5455.51	2.24	45.91	54.00	-8.09	175	13	Average	HORIZONTAL
2	5455.51	2.24	53.06	74.00	-20.94	159	302	Peak	HORIZONTAL
3	5460.00	2.24	50.15	74.00	-23.85	188	266	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHz

Data: 295

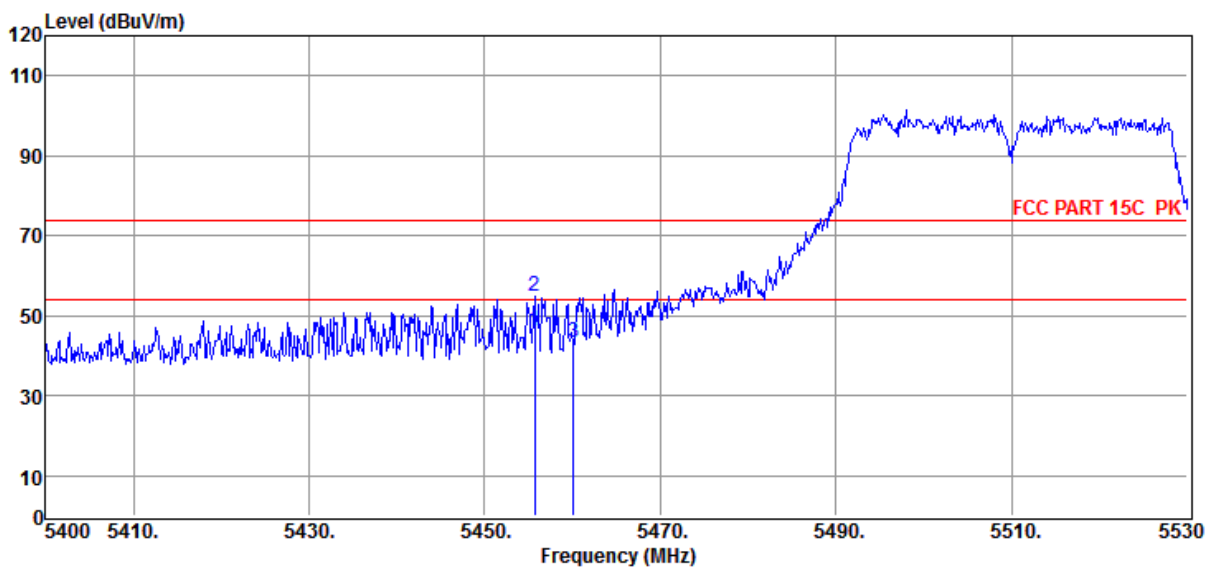

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5455.64	2.24	46.01	54.00	-7.99	177	54	Average	VERTICAL
2	5455.64	2.24	54.77	74.00	-19.23	186	203	Peak	VERTICAL
3	5460.00	2.24	43.23	74.00	-30.77	182	78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHz

Data: 312

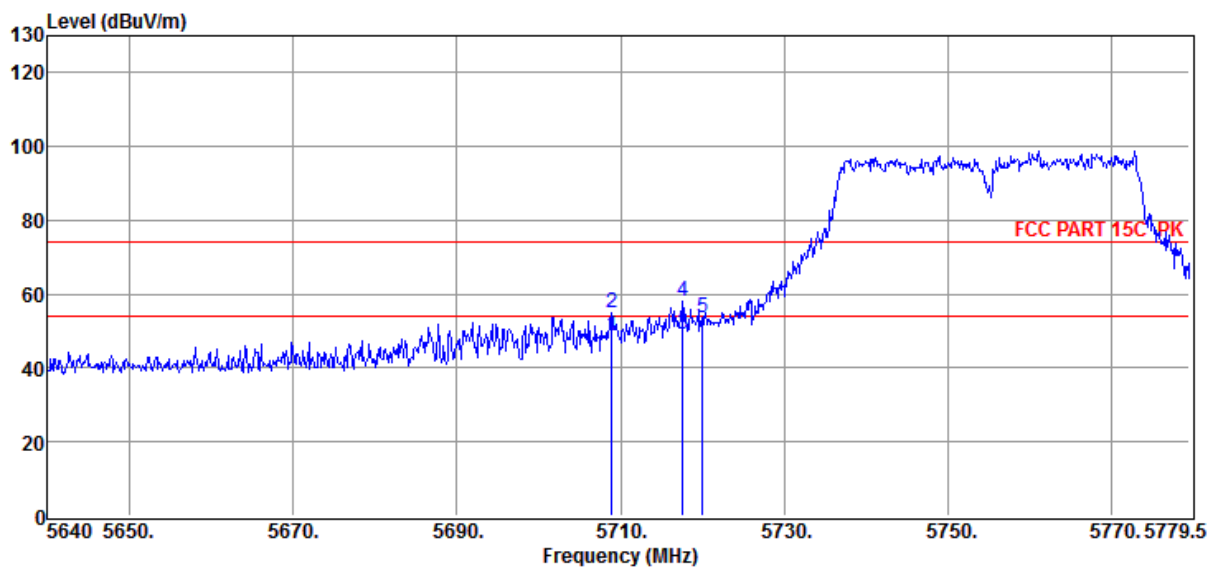

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5708.91	2.88	48.56	54.00	-5.44	160	173	Average	HORIZONTAL
2	5708.91	2.88	55.14	74.00	-18.86	184	46	Peak	HORIZONTAL
3	5717.56	2.82	49.30	54.00	-4.70	169	142	Average	HORIZONTAL
4	5717.56	2.82	58.13	74.00	-15.87	159	53	Peak	HORIZONTAL
5	5720.00	2.81	53.61	74.00	-20.39	164	183	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHz

Data: 313

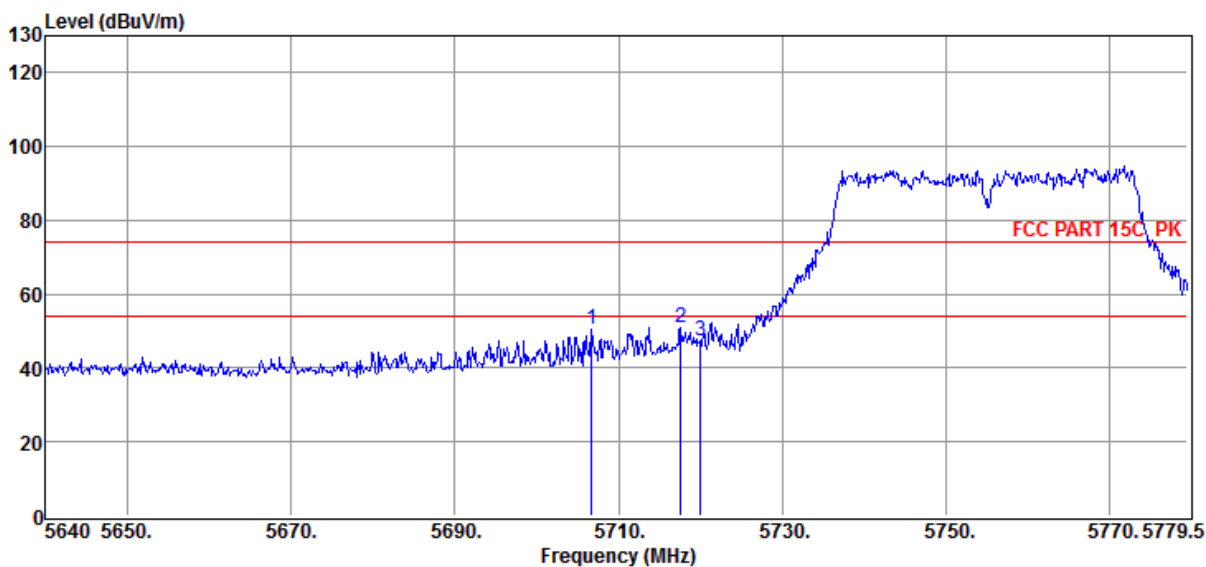

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5706.68	2.88	50.27	74.00	-23.73	189	262	Peak	VERTICAL
2	5717.56	2.82	50.73	74.00	-23.27	160	248	Peak	VERTICAL
3	5720.00	2.81	47.40	74.00	-26.60	153	241	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHz

Data: 314

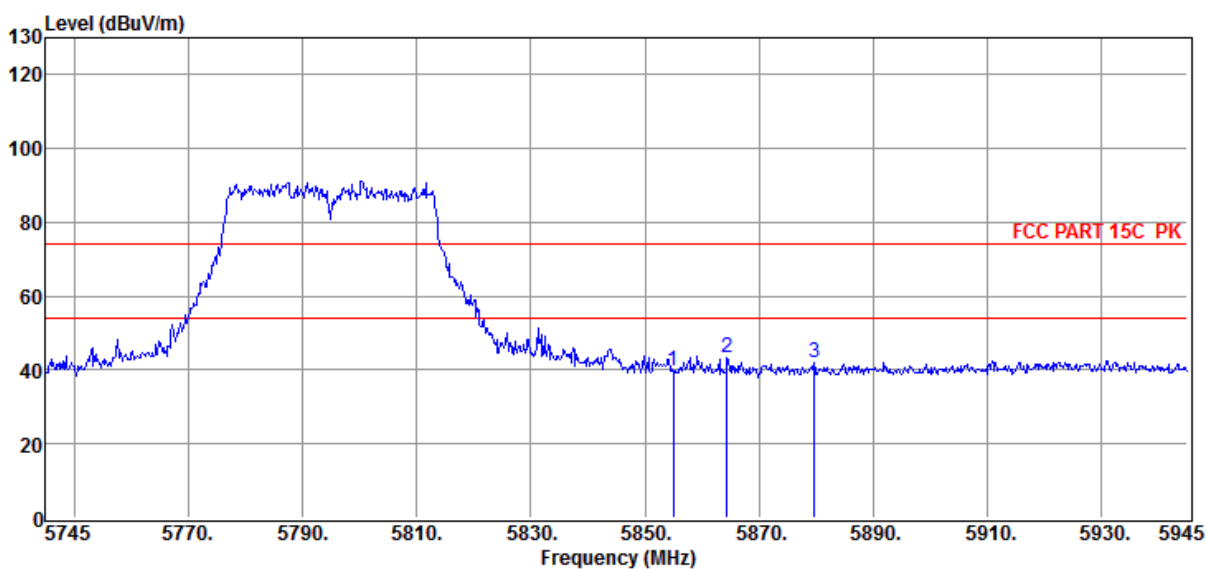

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	39.89	74.00	-34.11	183	22	Peak	VERTICAL
2	5864.40	2.89	43.29	74.00	-30.71	172	34	Peak	VERTICAL
3	5879.60	3.13	41.92	74.00	-32.08	177	226	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHz

Data: 315

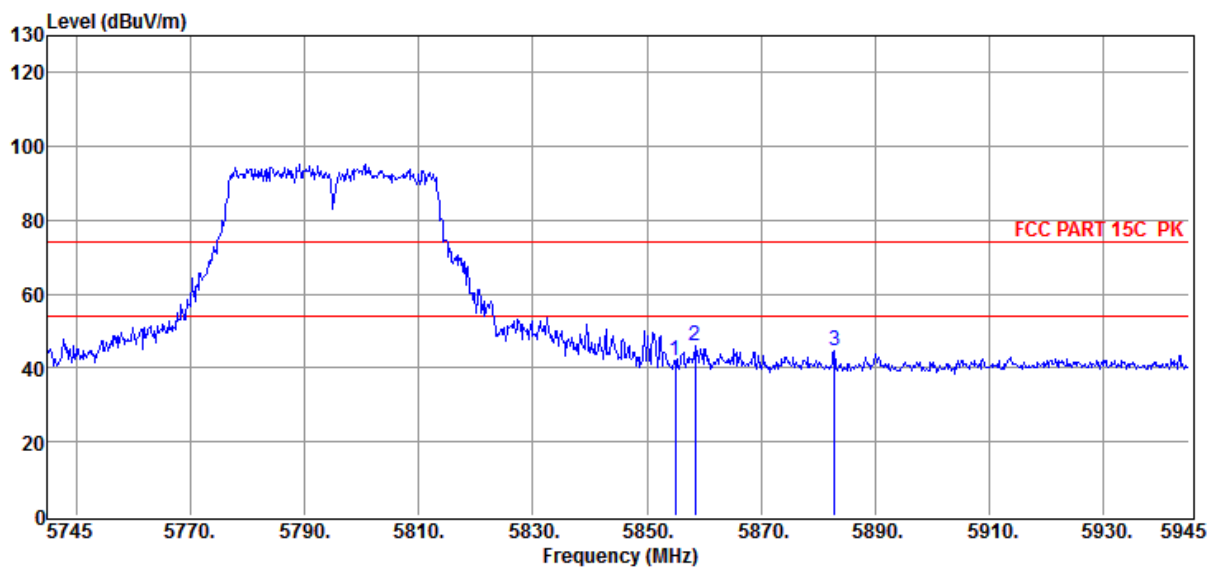

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	41.95	74.00	-32.05	162	341	Peak	HORIZONTAL
2	5858.40	2.81	46.15	74.00	-27.85	181	325	Peak	HORIZONTAL
3	5882.80	3.17	44.54	74.00	-29.46	178	201	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHz

Data: 300

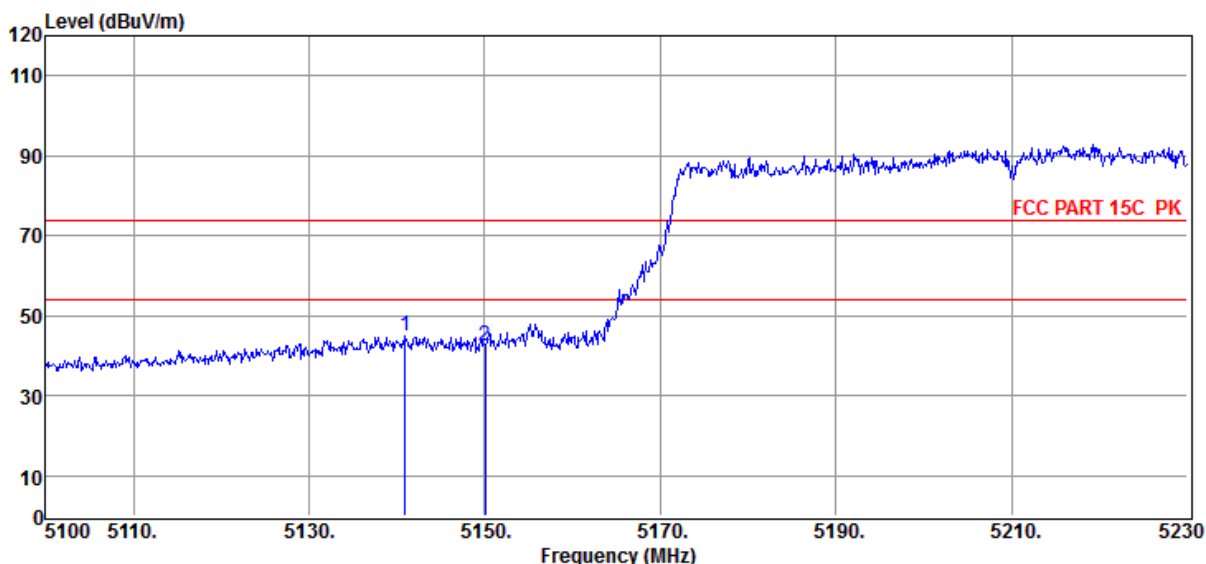

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5140.95	1.54	44.83	74.00	-29.17	166	207	Peak	VERTICAL
2	5150.05	1.50	42.52	74.00	-31.48	154	13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHz

Data: 301

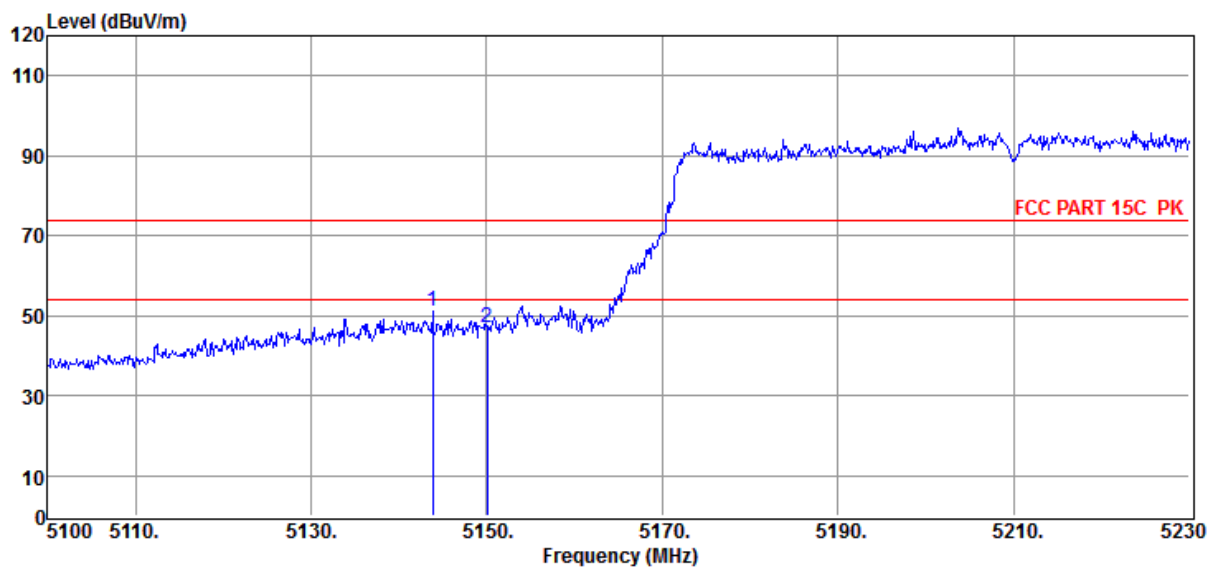

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5143.81	1.53	51.19	74.00	-22.81	181	162	Peak	HORIZONTAL
2	5150.05	1.50	47.07	74.00	-26.93	173	310	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHz

Data: 302

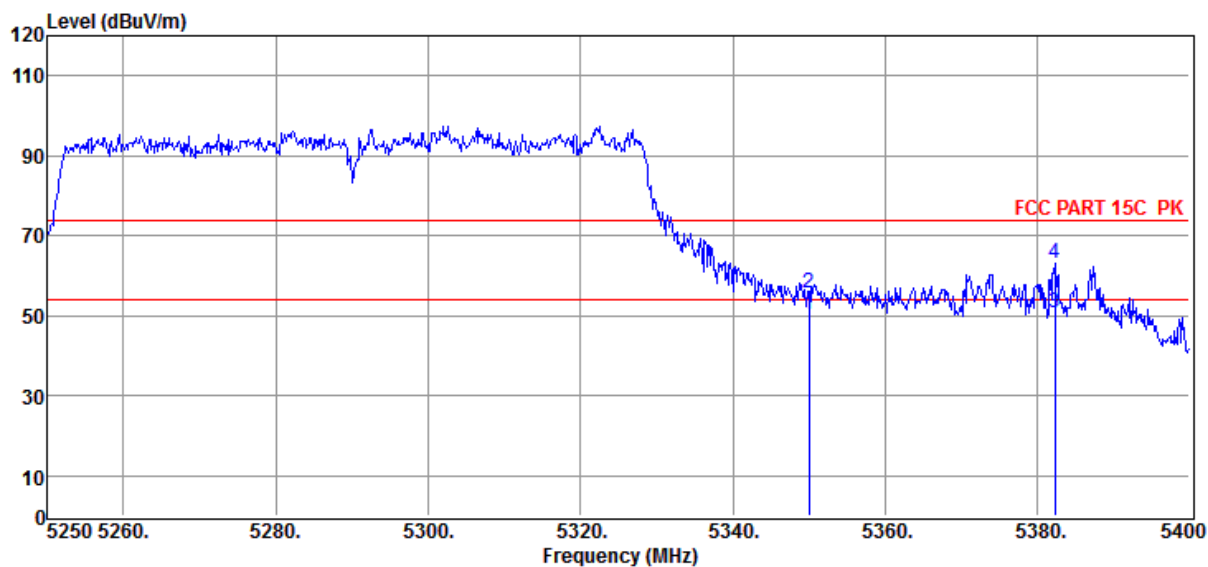

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	50.45	54.00	-3.55	186	25	Average	HORIZONTAL
2	5350.00	1.68	55.81	74.00	-18.19	154	356	Peak	HORIZONTAL
3	5382.30	1.90	50.66	54.00	-3.34	168	204	Average	HORIZONTAL
4	5382.30	1.90	62.90	74.00	-11.10	174	300	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHz

Data: 303

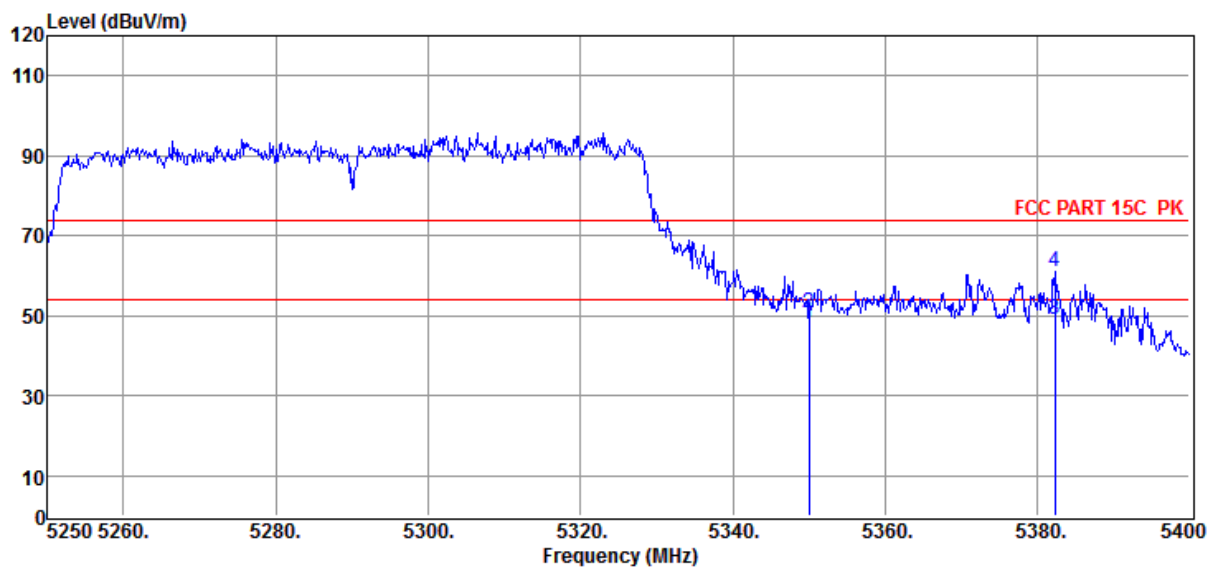

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5350.00	1.68	48.15	54.00	-5.85	168	256	Average	VERTICAL
2	5350.00	1.68	50.74	74.00	-23.26	198	307	Peak	VERTICAL
3	5382.30	1.90	49.06	54.00	-4.94	162	21	Average	VERTICAL
4	5382.30	1.90	60.82	74.00	-13.18	185	329	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHz

Data: 304

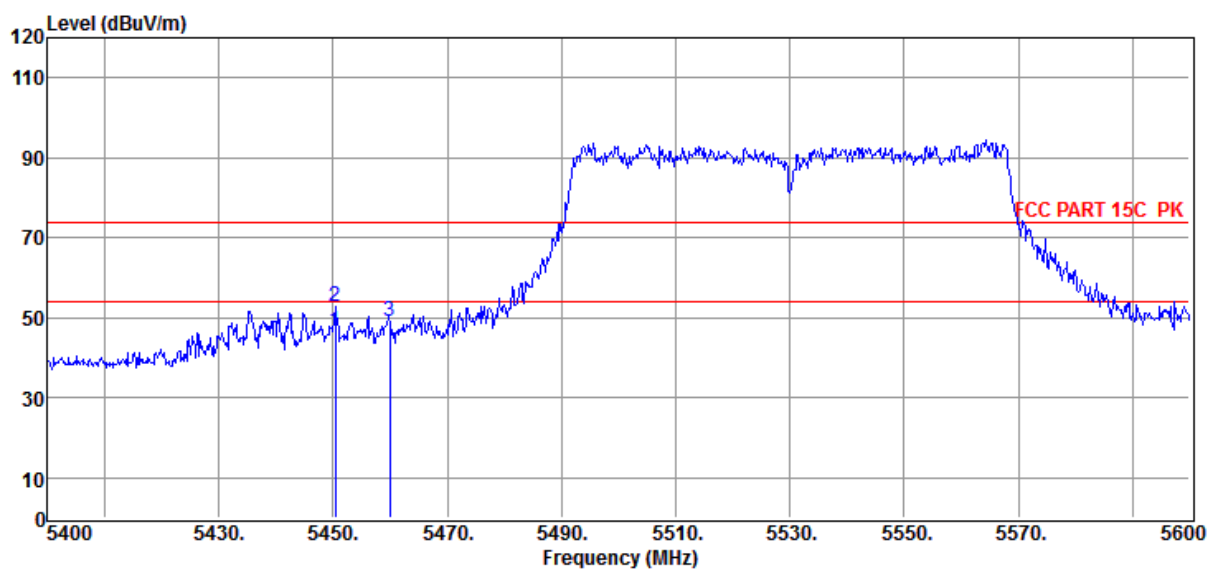

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5450.40	2.23	46.60	54.00	-7.40	175	54	Average	VERTICAL
2	5450.40	2.23	52.71	74.00	-21.29	182	302	Peak	VERTICAL
3	5460.00	2.24	49.12	74.00	-24.88	186	211	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHz

Data: 305

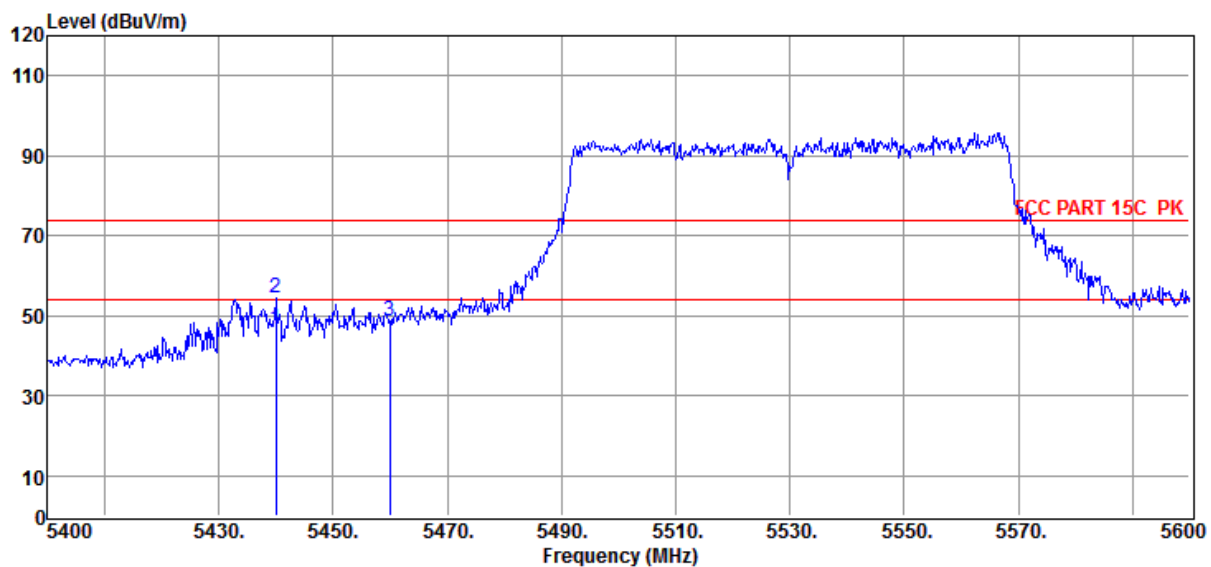

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5440.00	2.18	46.56	54.00	-7.44	189	329	Average	HORIZONTAL
2	5440.00	2.18	54.59	74.00	-19.41	175	204	Peak	HORIZONTAL
3	5460.00	2.24	48.73	74.00	-25.27	156	298	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHz

Data: 306

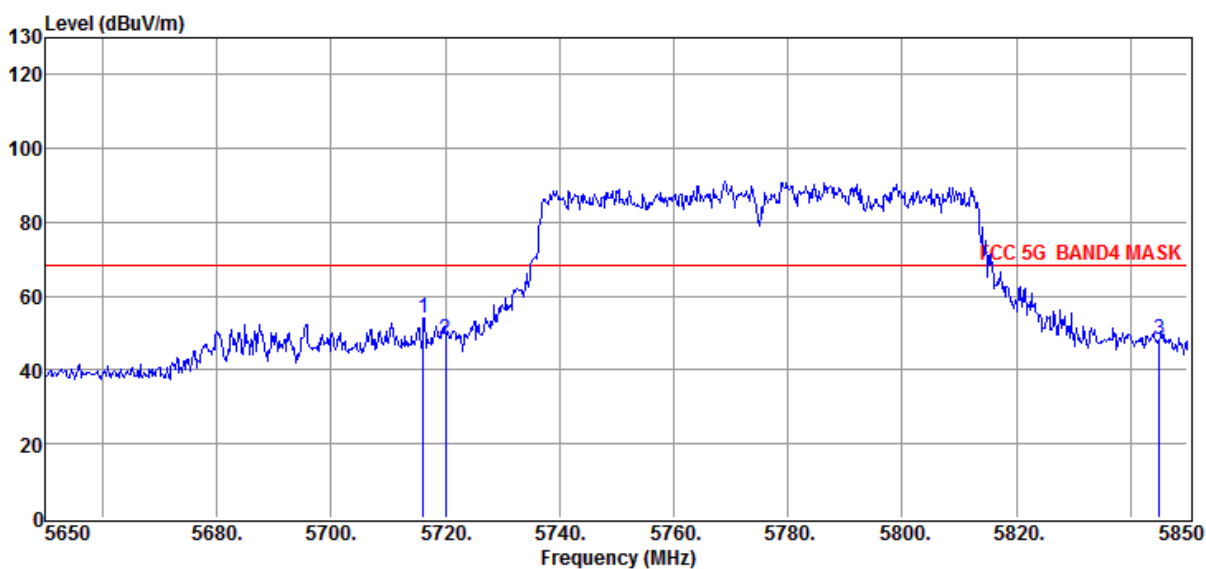

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5716.20	2.83	54.08	68.20	-14.12	183	155	Peak	VERTICAL
2	5720.00	2.81	48.09	68.20	-20.11	175	205	Peak	VERTICAL
3	5845.00	2.67	48.11	68.20	-20.09	185	357	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHz

Data: 307

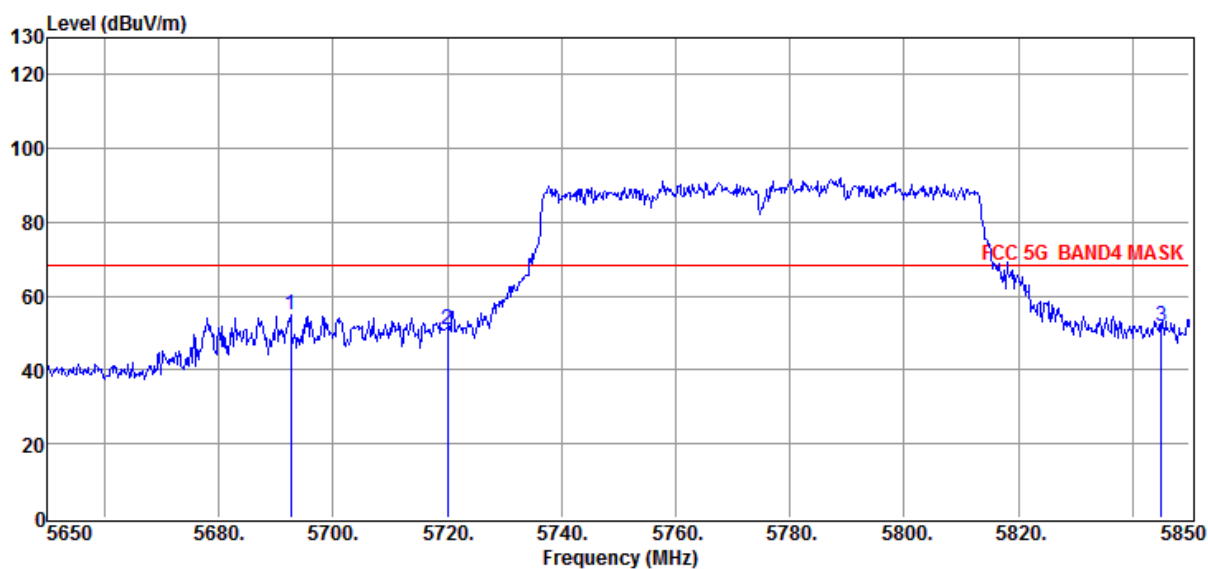

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5692.60	2.88	54.80	68.20	-13.40	163	23	Peak	HORIZONTAL
2	5720.00	2.81	50.77	68.20	-17.43	184	301	Peak	HORIZONTAL
3	5845.00	2.67	51.65	68.20	-16.55	159	255	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5795MHz

Data: 308

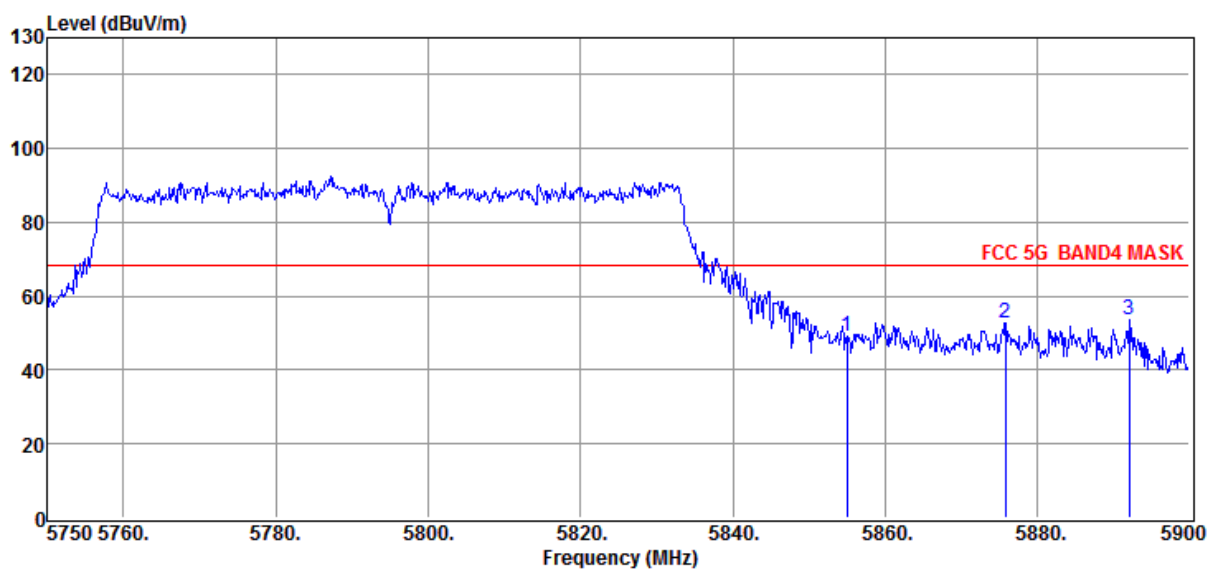

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	49.17	68.20	-19.03	187	25	Peak	HORIZONTAL
2	5875.85	3.07	52.68	68.20	-15.52	169	167	Peak	HORIZONTAL
3	5892.05	3.31	53.77	68.20	-14.43	151	142	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 12-02-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5795MHz

Data: 309

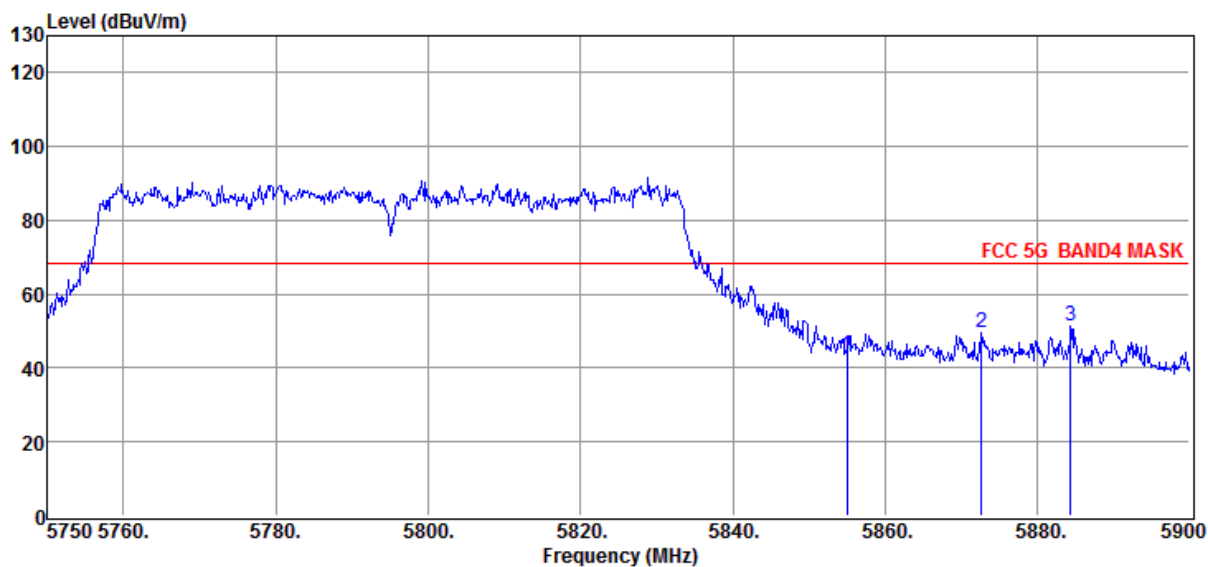

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	5855.00	2.75	43.22	68.20	-24.98	172	222	Peak	VERTICAL
2	5872.70	3.02	49.44	68.20	-18.76	154	309	Peak	VERTICAL
3	5884.40	3.19	51.50	68.20	-16.70	183	201	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

7. APPENDIXES

The below appendix was detail result tested by SGS-CSTC Standards Technical Services, Co., Ltd. Shenzhen Branch (Date of Test: 2019/7/3 ~ 2019/7/20)

All appendixes were cited in this report.

Appendix	Item
Appendix	5GWIFI