



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Proxim Wireless Corporation
Applicant Address	1561 Buckeye Drive, Milpitas CA 95035 USA
FCC ID	HZB-PROXMB92
Manufacturer's company	Proxim Wireless Corporation
Manufacturer Address	1561 Buckeye Drive, Milpitas CA 95035 USA

Product Name	miniPCI High Power MIMO IEEE 802.11 a/b/g/n RF Module
Brand Name	PROXIM
Model Name	PROXMB92
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	May 10, 2010
Final Test Date	Jul. 15, 2010
Submission Type	Original Equipment

Statement

Test result included is only for the 802.11n, 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	7
3.3. Table for Filed Antenna.....	8
3.4. Table for Carrier Frequencies	9
3.5. Table for Test Modes	10
3.6. Table for Testing Locations.....	12
3.7. Table for Supporting Units	12
3.8. Table for Parameters of Test Software Setting	13
3.9. Test Configurations	17
4. TEST RESULT	28
4.1. AC Power Line Conducted Emissions Measurement.....	28
4.2. Maximum Conducted Output Power Measurement.....	34
4.3. Power Spectral Density Measurement	89
4.4. 6dB Spectrum Bandwidth Measurement	118
4.5. Radiated Emissions Measurement	158
4.6. Band Edge Emissions Measurement	222
4.7. Antenna Requirements	255
5. LIST OF MEASURING EQUIPMENTS	256
6. TEST LOCATION.....	258
7. TAF CERTIFICATE OF ACCREDITATION	259
APPENDIX A. TEST PHOTOS	A1 ~ A13
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B5

History of This Test Report

Original Issue Date: Jul. 16, 2010

Report No.: FR051015AB

- ☒ No additional attachment.
- ☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : miniPCI High Power MIMO IEEE 802.11 a/b/g/n RF Module
Brand Name : PROXIM
Model Name : PROXMB92
Applicant : Proxim Wireless Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 10, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Leo Huang 2010.7.16

Leo Huang / Manager

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	2.32 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.10 dB
4.3	15.247(e)	Power Spectral Density	Complies	6.57 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.02 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.15 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<For 2.4GHz Band>: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <For 5GHz Band>: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	<For 2.4GHz Band>: <For Ant. 4> MCS8 (40MHz): 36.32 MHz <For Ant. 5> MCS8 (40MHz): 36.32 MHz <For Ant. 6> MCS8 (40MHz): 36.24 MHz <For Ant. 7> MCS8 (40MHz): 36.32 MHz <For 5GHz Band>: <For Ant. 1> MCS8 (40MHz): 36.32 MHz <For Ant. 2> MCS8 (40MHz): 36.24 MHz <For Ant. 3> MCS8 (40MHz): 36.32 MHz <For Ant. 4> MCS8 (40MHz): 36.24 MHz

Items	Description
Conducted Output Power	<For 2.4GHz Band>: <For Ant. 4> MCS8 (40MHz): 21.65 dBm <For Ant. 5> MCS8 (40MHz): 21.00 dBm <For Ant. 6> MCS8 (40MHz): 22.63 dBm <For Ant. 7> MCS8 (40MHz): 24.21 dBm <For 5GHz Band>: <For Ant. 1> MCS8 (40MHz): 17.86 dBm <For Ant. 2> MCS8 (40MHz): 23.30 dBm <For Ant. 3> MCS8 (40MHz): 17.43 dBm <For Ant. 4> MCS8 (40MHz): 23.30 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	<For Ant. 1>: 11a: 16.52 MHz <For Ant. 2>: 11a: 16.52 MHz <For Ant. 3>: 11a: 16.56 MHz <For Ant. 4>: 11b: 15.84 MHz ; 11g: 16.56 MHz ; 11a: 16.52 MHz <For Ant. 5>: 11b: 15.88 MHz ; 11g: 16.52 MHz <For Ant. 6>: 11b: 15.88 MHz ; 11g: 16.56 MHz <For Ant. 7>: 11b: 15.80 MHz ; 11g: 16.56 MHz

Items	Description
Conducted Output Power	<For Ant. 1>: 11a: 17.90 dBm <For Ant. 2>: 11a: 22.03 dBm <For Ant. 3>: 11a: 17.52 dBm <For Ant. 4>: 11b: 21.31 dBm ; 11g: 24.20 dBm ; 11a: 22.03 dBm <For Ant. 5>: 11b: 19.57 dBm ; 11g: 23.65 dBm <For Ant. 6>: 11b: 20.73 dBm ; 11g: 25.28 dBm <For Ant. 7>: 11b: 16.89 dBm ; 11g: 25.23 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	V	V	V	V
IEEE 802.11b	V	V	V	V
IEEE 802.11g	V	V	V	V
IEEE 802.11n	V	V	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Attenuator (dBi)	Antenna gain		Cable Loss		Test Antenna gain	
						2.4GHz Band	5GHz Band	2.4GHz Band	5GHz Band	2.4GHz Band	5GHz Band
1	MARS	MA-WA55-30	Panel Antenna	N-Type	10	-	30	-	2	-	18
2	MARS	MA-WB55-20	Sector Antenna	N-Type	10	-	20	-	2	-	8
3	CSC Networks	65812 ODN	Omni Antenna	N-Type	-	-	12	-	2	-	10
4	SmartAnt	USI05-220170 -V1	Dipole Antenna	Reversed-SMA	-	2.5	5	0.5	0.5	2	4.5
5	MARS	MA-WA25-20	Panel Antenna	N-Type	10	20	-	1	-	9	-
6	CSC Networks	62420 SN-120	Sector Antenna	N Female	10	20	-	1	-	9	-
7	CSC Networks	62416 ODN	Omni Antenna	N-Type	10	17	-	1	-	6	-

Note:

10dB attenuator was added in front of antenna port to simulate the real cable loss.

The EUT has two antenna connectors which can be used for transmitting and receiving simultaneously as 2Tx and 2Rx. Also there are seven types of antenna provided to this EUT and all of them can be used as transmitting and receiving antenna.

Connector 1(J8): TX/RX

Connector 2(J9): TX/RX



3.4. Table for Carrier Frequencies

<For 2.4GHz Band>

Frequency Allocation for 802.11b/g

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

<For 5GHz Band>

Frequency Allocation for 802.11a

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz (Band 4)	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band

<Ant. 4 / Ant. 5 / Ant. 6 / Ant. 7>:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS8/40MHz	27 Mbps	3/6/9	4, 5, 6, 7
	11b/CCK	1 Mbps	1/6/11	4, 5, 6, 7
	11g/BPSK	6 Mbps	1/6/11	4, 5, 6, 7
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/40MHz	27 Mbps	3/6/9	4, 5, 6, 7
	11b/CCK	1 Mbps	1/6/11	4, 5, 6, 7
	11g/BPSK	6 Mbps	1/6/11	4, 5, 6, 7
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS8/40MHz	27 Mbps	3/6/9	4, 5, 6, 7
	11b/CCK	1 Mbps	1/6/11	4, 5, 6, 7
	11g/BPSK	6 Mbps	1/6/11	4, 5, 6, 7
Band Edge Emissions	MCS8/40MHz	27 Mbps	3/9	4, 5, 6, 7
	11b/CCK	1 Mbps	1/11	4, 5, 6, 7
	11g/BPSK	6 Mbps	1/11	4, 5, 6, 7

For 5GHz Band

<Ant. 1 / Ant. 2 / Ant. 3 / Ant. 4>:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS8/40MHz	27 Mbps	151/159	1, 2, 3, 4
	11a/BPSK	6 Mbps	149/157/165	1, 2, 3, 4
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/40MHz	27 Mbps	151/159	1, 2, 3, 4
	11a/BPSK	6 Mbps	149/157/165	1, 2, 3, 4
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS8/40MHz	27 Mbps	151/159	1, 2, 3, 4
	11a/BPSK	6 Mbps	149/157/165	1, 2, 3, 4
Band Edge Emissions	MCS8/40MHz	27 Mbps	151/159	1, 2, 3, 4
	11a/BPSK	6 Mbps	149/157/165	1, 2, 3, 4

Note:

1. In theory, the test mode of two antennas transmitting simultaneously is worse case than single antenna.
2. 11g is same modulation type with 11n-HT20 so that 11g is representative in test.
3. 11a is same modulation type with 11an-HT20 so that 11a is representative in test.

Note:

Ant.1, Ant 2 would be only used in Band 2, Band 4 of 5GHz band due to outdoor antenna.

The following test modes were performed for all tests:

Test Mode 1. EUT + Antenna 1 (5GHz Antenna)

Test Mode 2. EUT + Antenna 2 (5GHz Antenna)

Test Mode 3. EUT + Antenna 3 (5GHz Antenna)

Test Mode 4. EUT + Antenna 4 (2.4GHz + 5GHz Antenna)

Test Mode 5. EUT + Antenna 5 (2.4GHz Antenna)

Test Mode 6. EUT + Antenna 6 (2.4GHz Antenna)

Test Mode 7. EUT + Antenna 7 (2.4GHz Antenna)

<For Conducted Emissions Test>:

After evaluating, only Mode 1 and Mode 5 were selected as worse case and recorded the test data in the report.

<For Radiated Emissions Test Below 1GHz>:

After evaluating, only Mode 1 and Mode 5 were selected as worse case and recorded the test data in the report.

<For Radiated Emissions Test Above 1GHz>:

All the test results were tested and recorded in the report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	879474	IC 4086	-
CO04-HY	Conduction	Hwa Ya	879474	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
POE	PowerDsine	PD-7001G	DoC
Notebook	DELL	M1330	E2KWM3945ABG
Notebook	DELL	D400	E2K24GBRL
Notebook	DELL	1200	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Antenna 1>:

Power Parameters of IEEE 802.11an MCS8 40MHz

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
IEEE 802.11an 40MHz Ant. 1	13	13

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825MHz
IEEE 802.11a Ant. 1	12.5	13	13.5

<For Antenna 2>:

Power Parameters of IEEE 802.11an MCS8 40MHz

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
IEEE 802.11an 40MHz Ant. 2	19	19

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825MHz
IEEE 802.11a Ant. 2	19	19	19

<For Antenna 3>:

Power Parameters of IEEE 802.11an MCS8 40MHz

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
IEEE 802.11an 40MHz Ant. 3	38	38

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825MHz
IEEE 802.11a Ant. 3	38	38	38

<For Antenna 4>:

<For 2.4GHz Band>

Power Parameters of IEEE 802.11n MCS8 40MHz

Test Software Version	TERMINAL		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. 4	10.5	16	11.5

Power Parameters of IEEE 802.11b/g

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 4	15.5	17	15.5
IEEE 802.11g Ant. 4	13	18	14

<For 5GHz Band>

Power Parameters of IEEE 802.11an MCS8 40MHz

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
IEEE 802.11an 40MHz Ant. 4	19	19

Power Parameters of IEEE 802.11a

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825MHz
IEEE 802.11a Ant. 4	19	19	19

<For Antenna 5>:

Power Parameters of IEEE 802.11n MCS8 40MHz

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. 5	11	15	11.5

Power Parameters of IEEE 802.11b/g

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 5	11	15	10
IEEE 802.11g Ant. 5	14	17.5	15

<For Antenna 6>:

Power Parameters of IEEE 802.11n MCS8 40MHz

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. 6	11.5	16.5	13

Power Parameters of IEEE 802.11b/g

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 6	15.5	16.5	17
IEEE 802.11g Ant. 6	15	19	15.5

<For Antenna 7>:

Power Parameters of IEEE 802.11n MCS8 40MHz

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. 7	16	18	17

Power Parameters of IEEE 802.11b/g

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 7	11.5	12	9
IEEE 802.11g Ant. 7	18.5	17	17

During the test, the following program under WIN XP was executed:


Executed "ART" to control the EUT continuously transmit RF signal.

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

<For Antenna 1> <5GHz>:

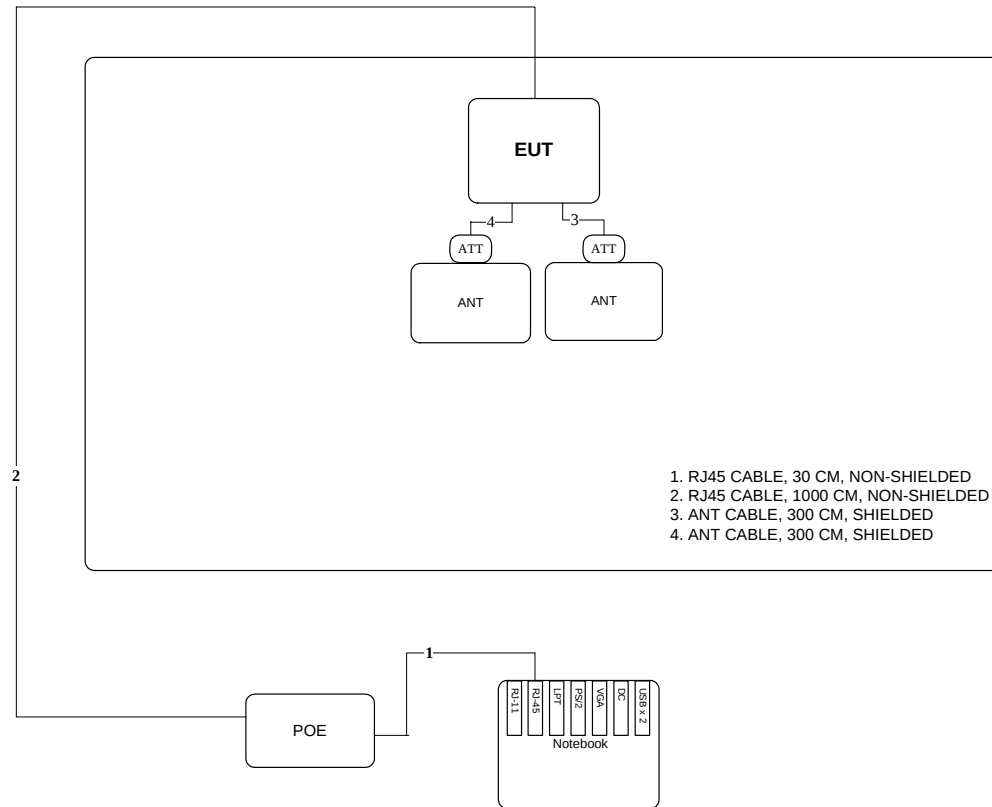


Test Configuration: 9KHz~1GHz

<For Antenna 5> <2.4GHz>:

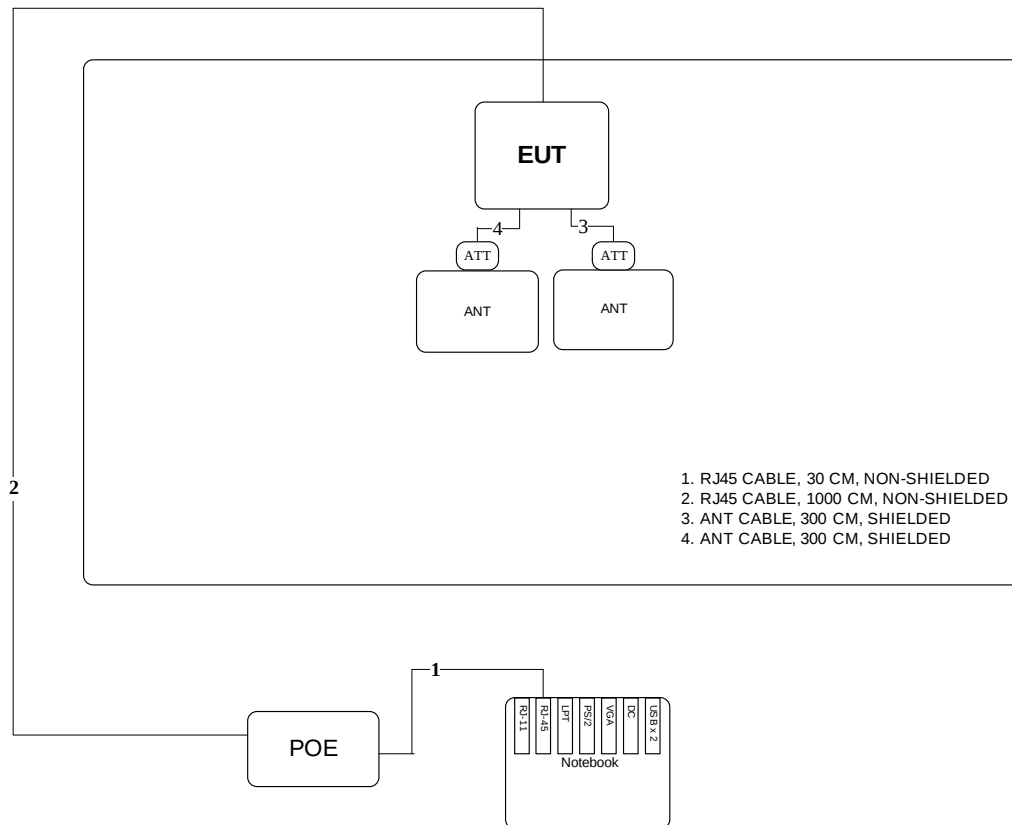




<For Antenna 1> <5GHz>:

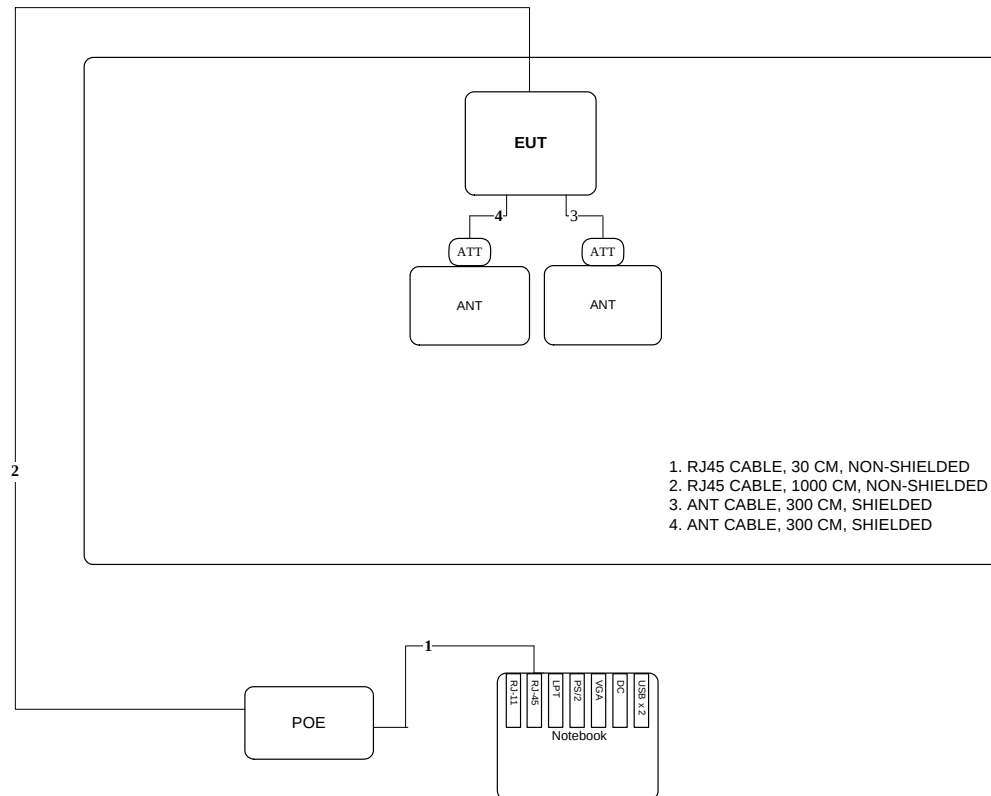


Test Configuration: above 1GHz

<For Antenna 2> <5GHz>:

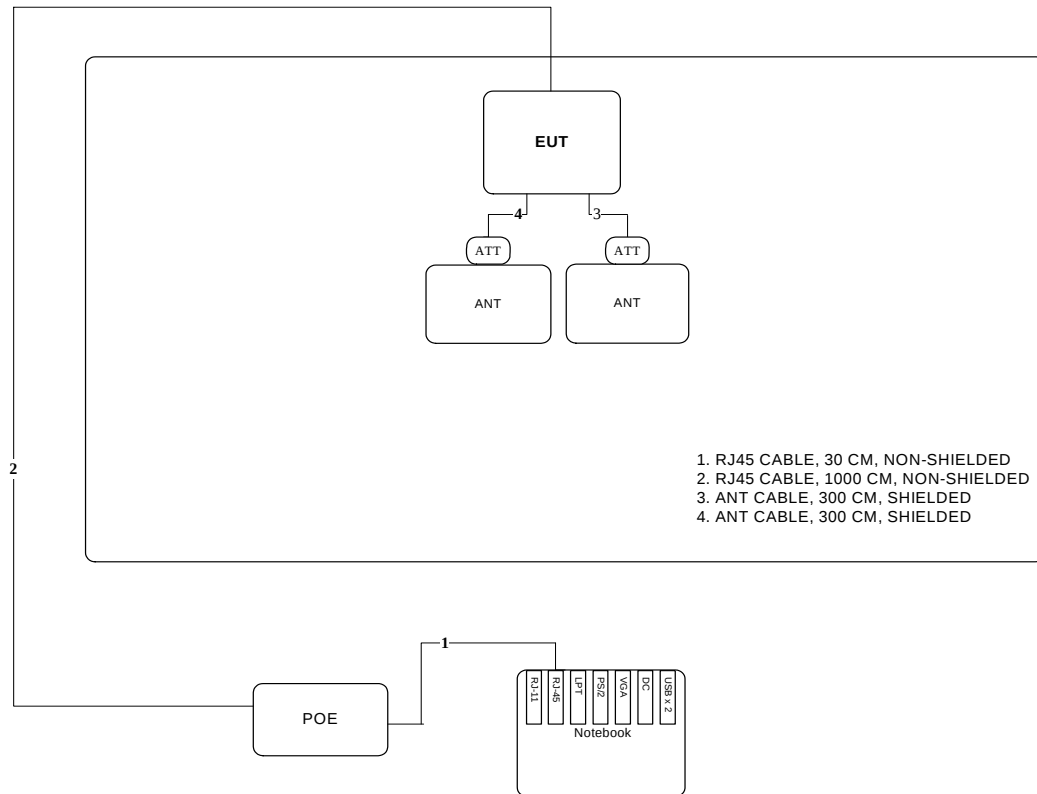


Test Configuration: above 1GHz

<For Antenna 3> <5GHz>:

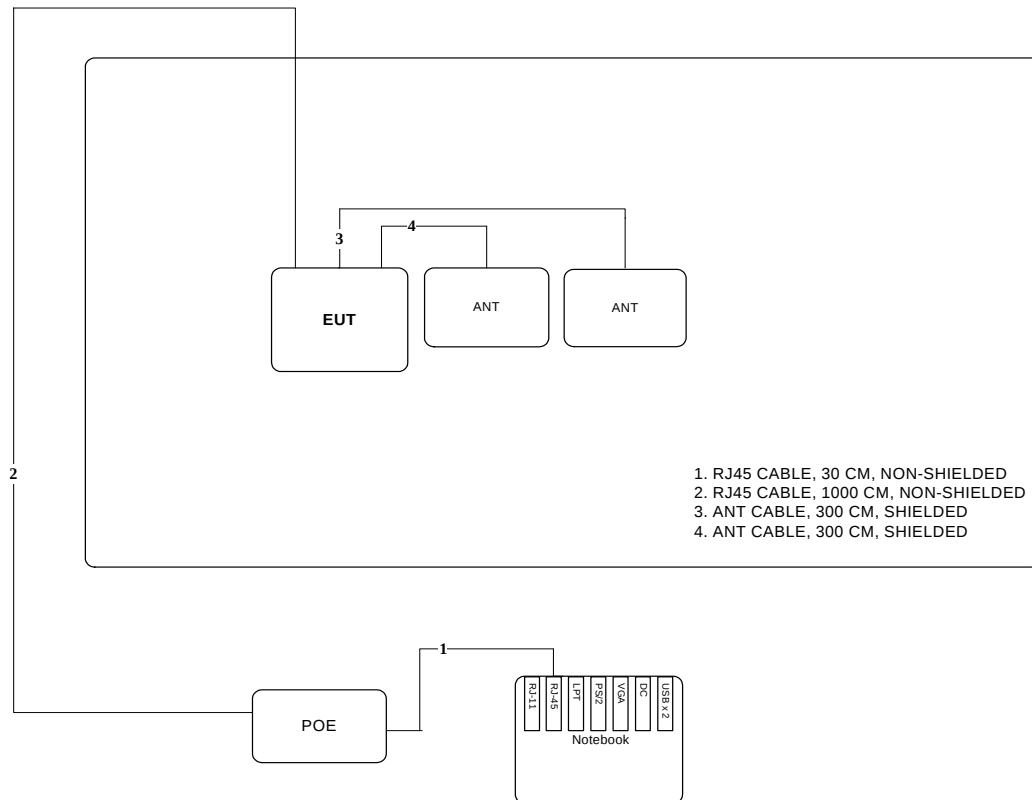


Test Configuration: above 1GHz

<For Antenna 4> <2.4GHz / 5GHz>:

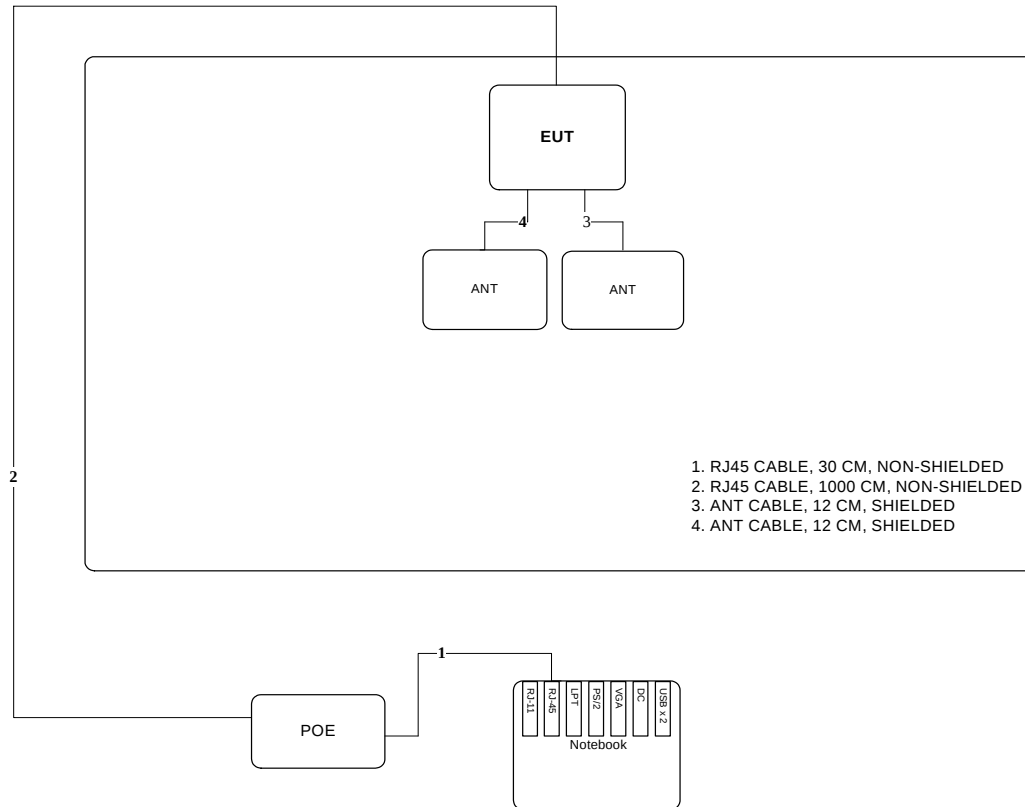


Test Configuration: above 1GHz

<For Antenna 5> <2.4GHz>:

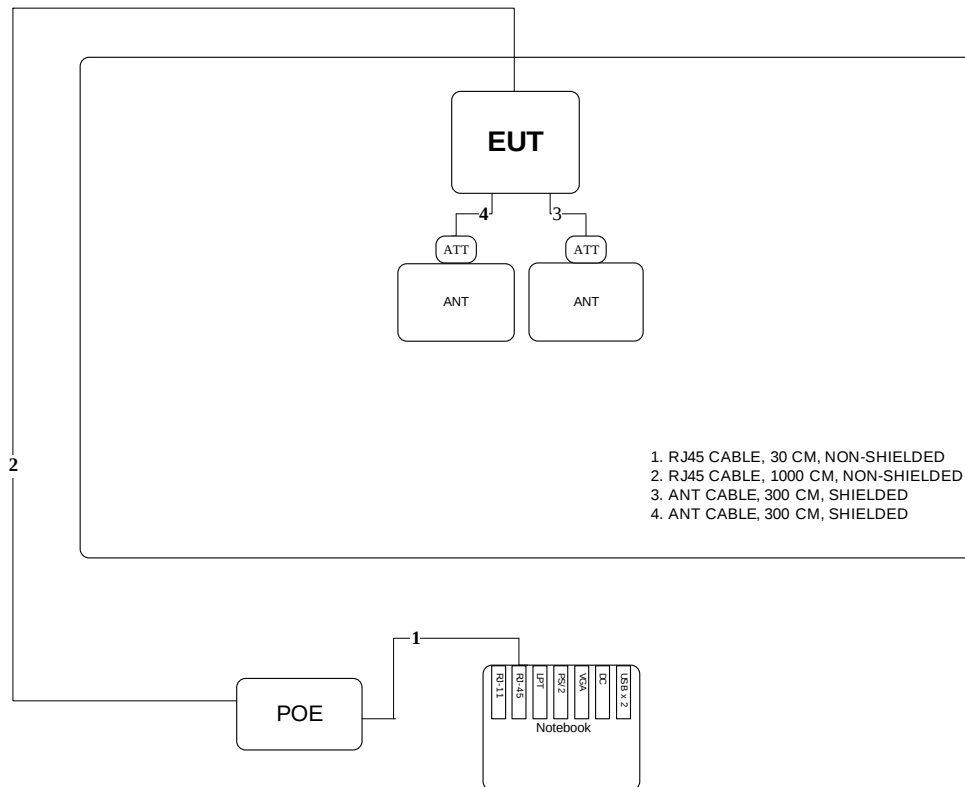


Test Configuration: above 1GHz

<For Antenna 6> <2.4GHz>:

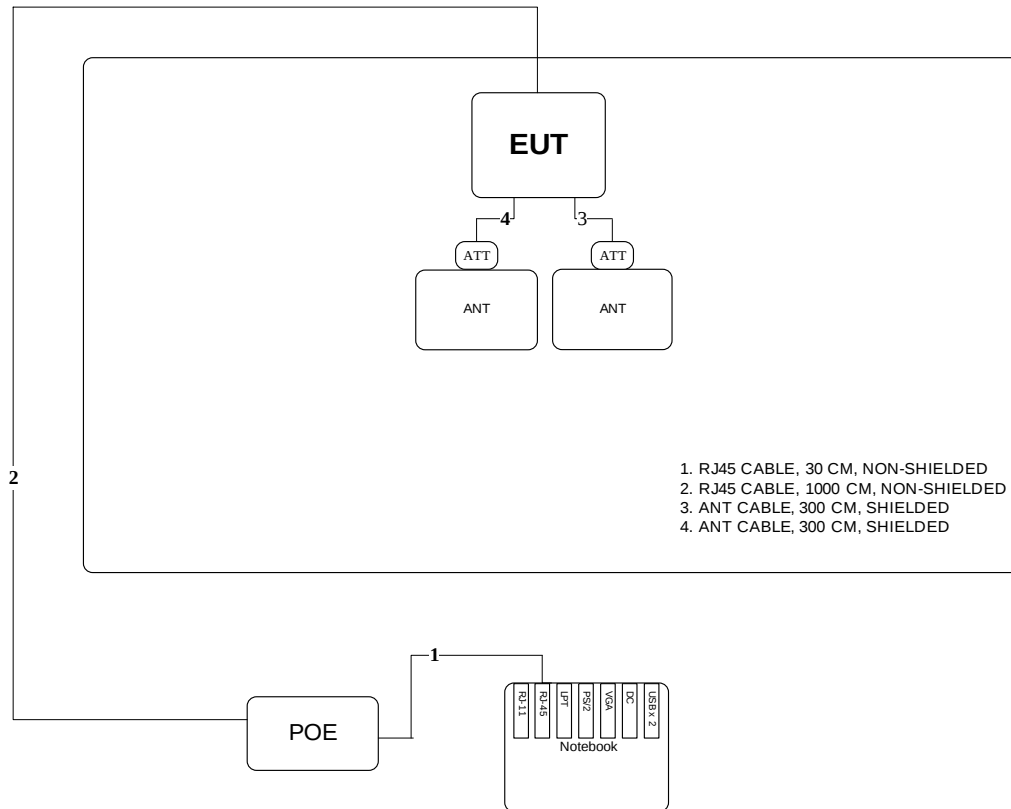


Test Configuration: above 1GHz

<For Antenna 7> <2.4GHz>:

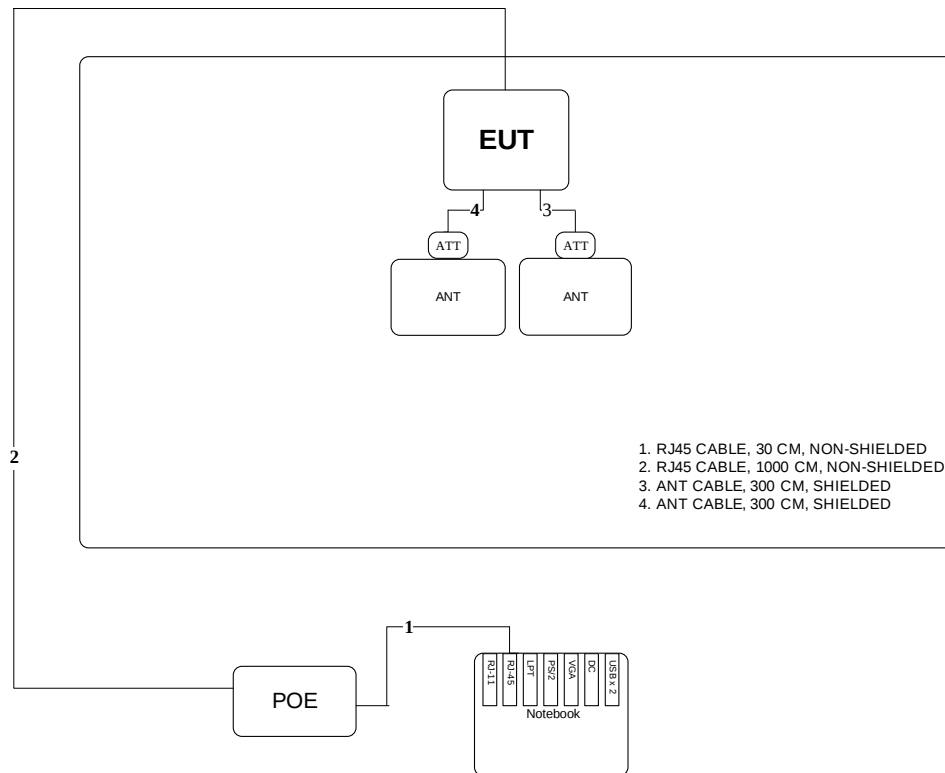

3.9.2. AC Power Line Conduction Emissions Test Configuration

<For Antenna 1 > <5GHz>:

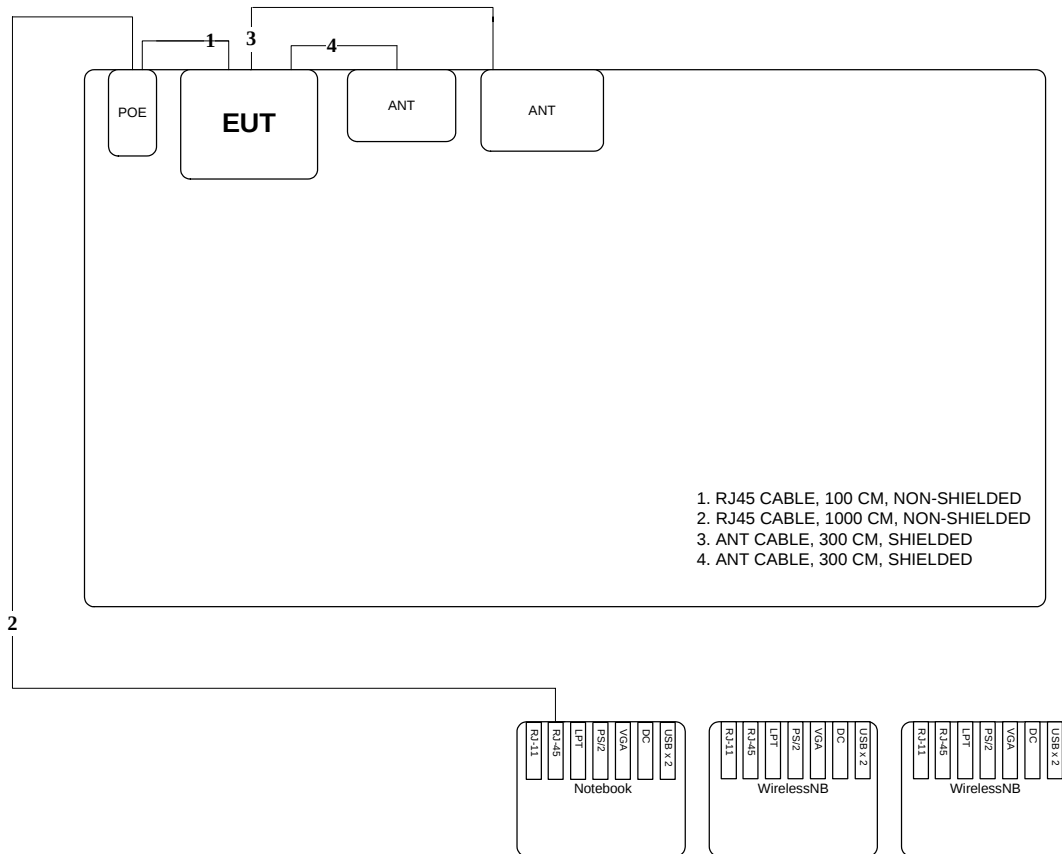



1. RJ45 CABLE, 100 CM, NON-SHIELDED
 2. RJ45 CABLE, 1000 CM, NON-SHIELDED
 3. ANT CABLE, 300 CM, SHIELDED
 4. ANT CABLE, 300 CM, SHIELDED

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

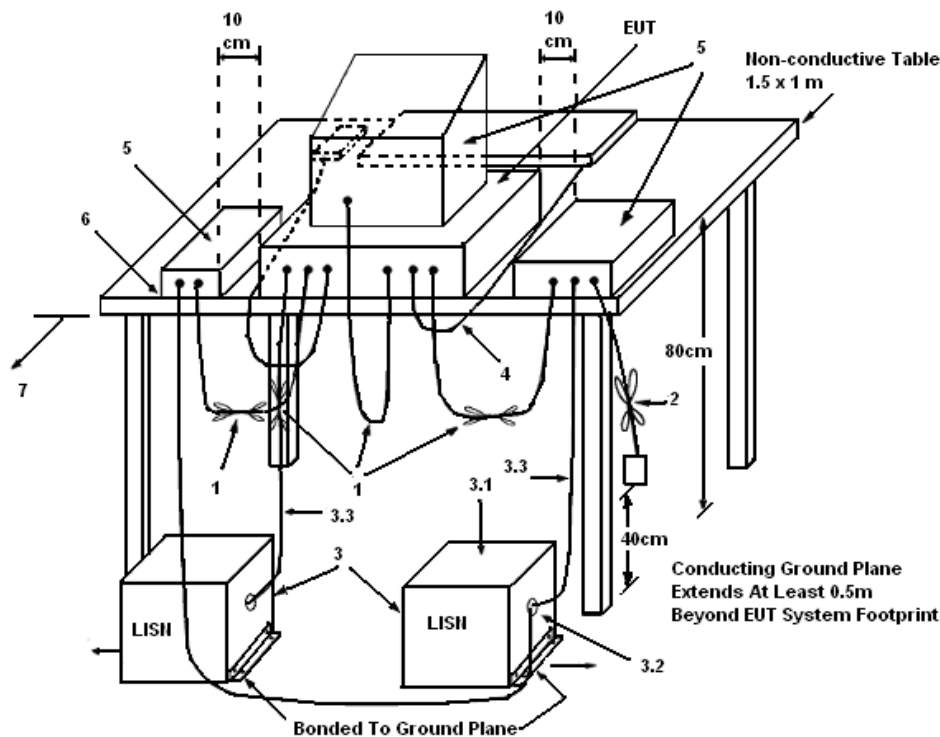

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.


4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. Results of AC Power Line Conducted Emissions Measurement


<For Mode 1 (Ant. 1)>:

Temperature	23°C	Humidity	54%
Test Engineer	Cloud Peng	Phase	Line
Configuration	Normal Link / Mode 1 (Ant. 1)		

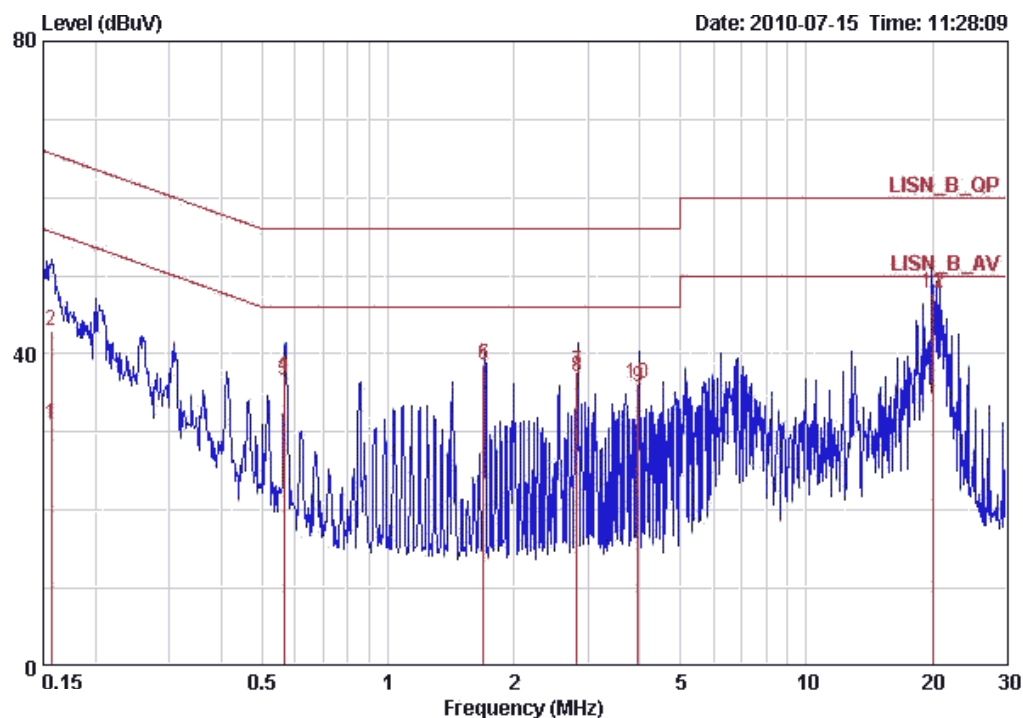

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15650	30.87	-24.78	55.65	30.48	0.19	0.20	AVERAGE
2	0.15650	43.03	-22.62	65.65	42.64	0.19	0.20	QP
3	0.56310	36.69	-19.31	56.00	36.49	0.00	0.20	QP
4	0.56310	37.16	-8.84	46.00	36.96	0.00	0.20	AVERAGE
5	1.694	38.68	-17.32	56.00	38.54	0.00	0.14	QP
6	1.694	38.52	-7.48	46.00	38.38	0.00	0.14	AVERAGE
7	2.823	37.67	-8.33	46.00	37.47	0.00	0.20	AVERAGE
8	2.823	37.11	-18.89	56.00	36.91	0.00	0.20	QP
9	3.951	35.82	-20.18	56.00	35.52	0.00	0.30	QP
10	3.951	36.23	-9.77	46.00	35.93	0.00	0.30	AVERAGE
11 ©	20.048	47.67	-2.33	50.00	47.07	0.10	0.50	AVERAGE
12	20.048	47.72	-12.28	60.00	47.12	0.10	0.50	QP

Temperature	23°C	Humidity	54%
Test Engineer	Cloud Peng	Phase	Neutral
Configuration	Normal Link / Mode 1 (Ant. 1)		

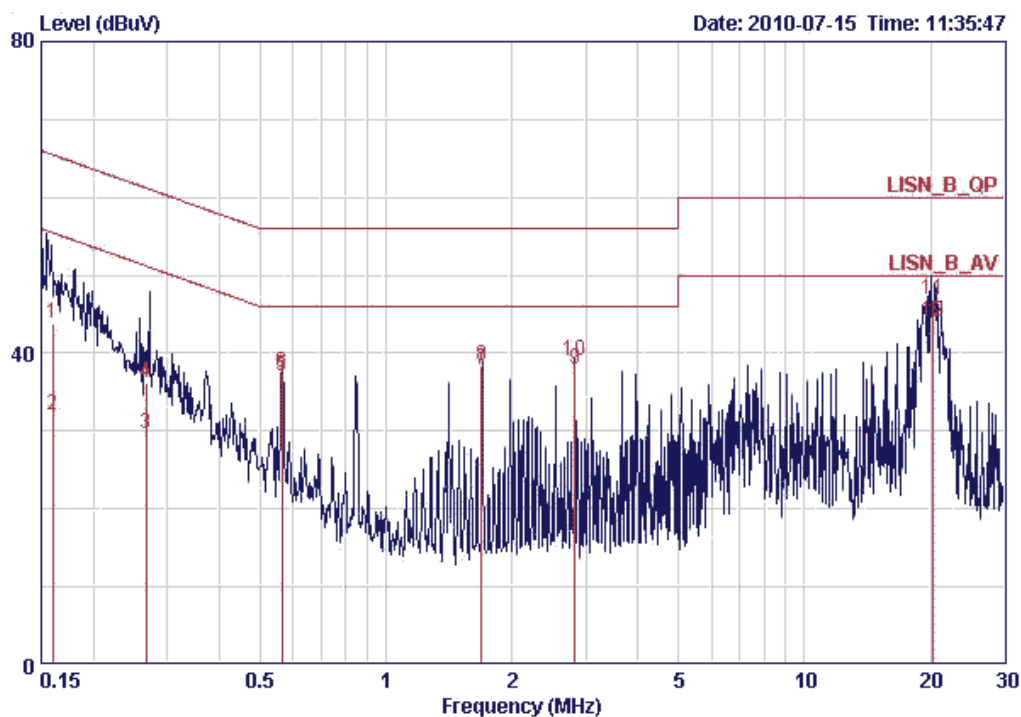


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16005	43.90	-21.56	65.46	43.52	0.18	0.20	QP
2	0.16005	32.00	-23.46	55.46	31.62	0.18	0.20	AVERAGE
3	0.26752	29.56	-21.64	51.19	29.30	0.06	0.20	AVERAGE
4	0.26752	36.11	-25.09	61.19	35.85	0.06	0.20	QP
5	0.56409	36.97	-19.03	56.00	36.77	0.00	0.20	QP
6	0.56409	37.46	-8.54	46.00	37.26	0.00	0.20	AVERAGE
7	1.692	37.97	-18.03	56.00	37.83	0.00	0.14	QP
8	1.692	38.43	-7.57	46.00	38.29	0.00	0.14	AVERAGE
9	2.821	37.95	-8.05	46.00	37.75	0.00	0.20	AVERAGE
10	2.821	39.04	-16.96	56.00	38.84	0.00	0.20	QP
11	20.241	46.98	-13.02	60.00	46.37	0.11	0.50	QP
12	20.241	43.95	-6.05	50.00	43.34	0.11	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Mode 5 (Ant. 5)>:

Temperature	23°C	Humidity	54%
Test Engineer	Cloud Peng	Phase	Line
Configuration	Normal Link / Mode 5 (Ant. 5)		

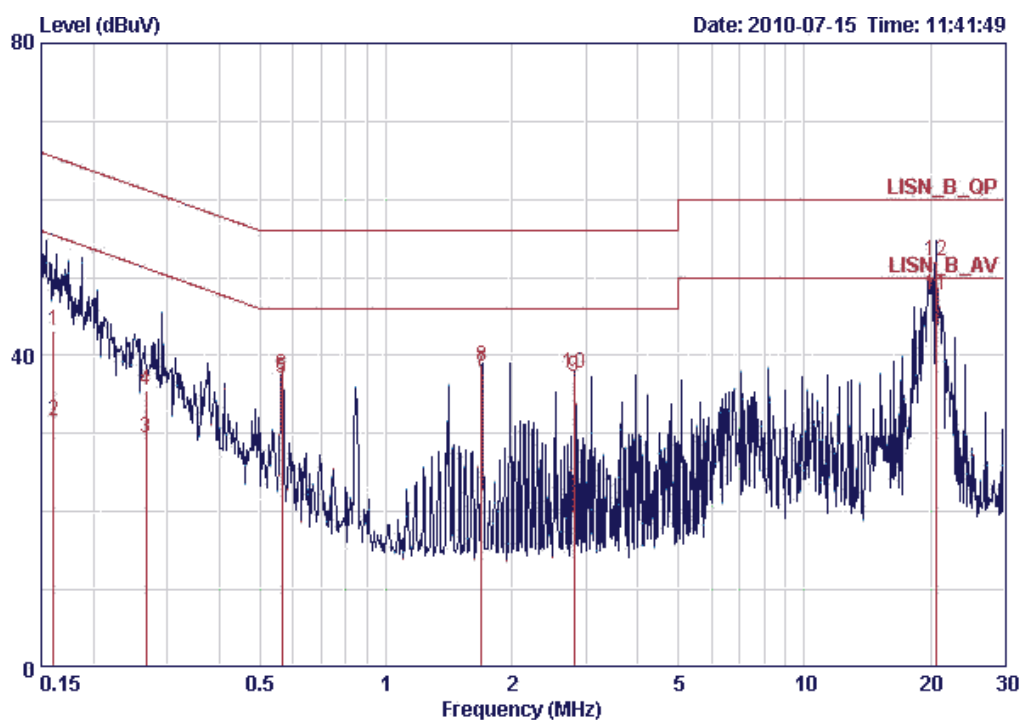

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16083	43.24	-22.19	65.42	42.86	0.18	0.20	QP
2	0.16083	31.62	-23.81	55.42	31.24	0.18	0.20	AVERAGE
3	0.26763	29.48	-21.71	51.19	29.22	0.06	0.20	AVERAGE
4	0.26763	35.54	-25.65	61.19	35.28	0.06	0.20	QP
5	0.56409	37.01	-18.99	56.00	36.81	0.00	0.20	QP
6	0.56409	37.52	-8.48	46.00	37.32	0.00	0.20	AVERAGE
7	1.690	37.93	-18.07	56.00	37.79	0.00	0.14	QP
8	1.690	38.52	-7.48	46.00	38.38	0.00	0.14	AVERAGE
9	2.817	37.19	-18.81	56.00	36.99	0.00	0.20	QP
10	2.817	37.62	-8.38	46.00	37.42	0.00	0.20	AVERAGE
11	20.570	47.68	-2.32	50.00	47.07	0.11	0.50	AVERAGE
12	20.570	52.14	-7.86	60.00	51.53	0.11	0.50	QP

Temperature	23°C	Humidity	54%
Test Engineer	Cloud Peng	Phase	Neutral
Configuration	Normal Link / Mode 5 (Ant. 5)		

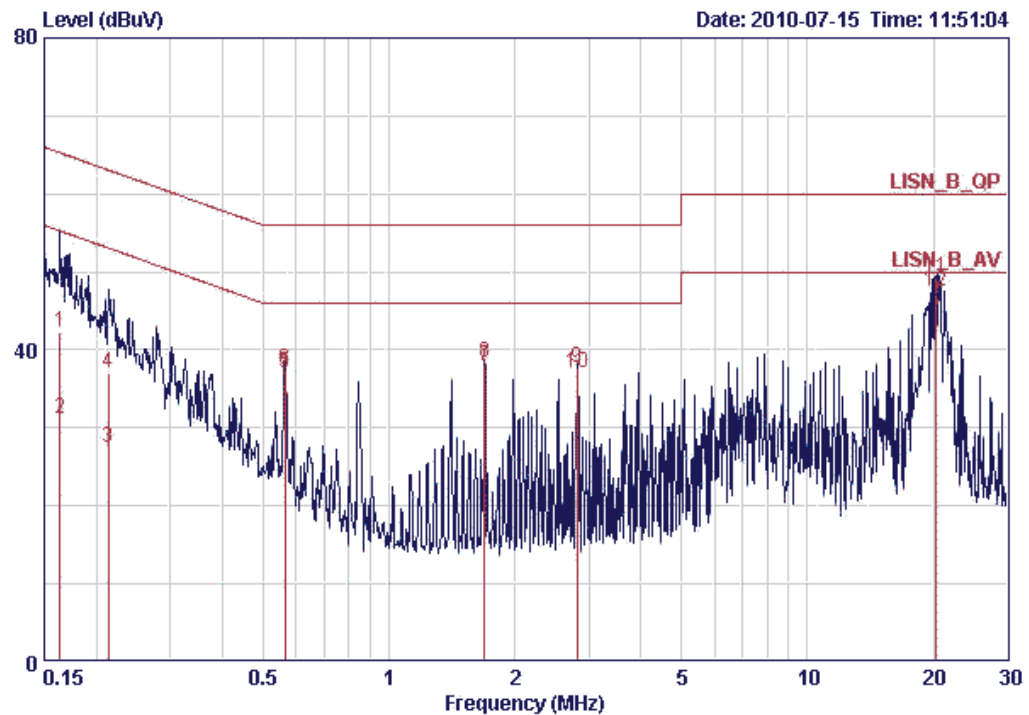

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16327	42.27	-23.03	65.30	41.90	0.17	0.20	QP
2	0.16327	31.16	-24.14	55.30	30.79	0.17	0.20	AVERAGE
3	0.21392	27.48	-25.57	53.05	27.19	0.09	0.20	AVERAGE
4	0.21392	37.16	-25.89	63.05	36.87	0.09	0.20	QP
5	0.56409	36.99	-19.01	56.00	36.79	0.00	0.20	QP
6	0.56409	37.52	-8.48	46.00	37.32	0.00	0.20	AVERAGE
7	1.689	37.89	-18.11	56.00	37.75	0.00	0.14	QP
8	1.689	38.30	-7.70	46.00	38.16	0.00	0.14	AVERAGE
9	2.815	37.62	-8.38	46.00	37.42	0.00	0.20	AVERAGE
10	2.815	37.13	-18.87	56.00	36.93	0.00	0.20	QP
11	20.280	49.30	-10.70	60.00	48.69	0.11	0.50	QP
12	20.280	47.44	-2.56	50.00	46.83	0.11	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1 MHz
VB	3MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

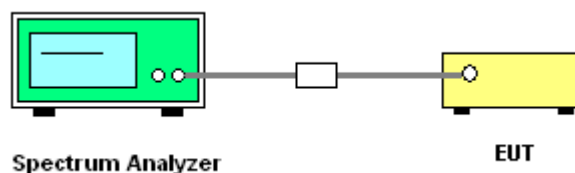

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

<For Antenna 1>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 1

Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	14.56	18.00	Complies
159	5795 MHz	14.55	18.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 1-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.12	18.00	Complies
159	5795 MHz	14.69	18.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1 + Ant. 1-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.86	18.00	Complies
159	5795 MHz	17.63	18.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a / Antenna 1

Configuration IEEE 802.11a Ant. 1-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	14.17	18.00	Complies
157	5785 MHz	14.15	18.00	Complies
165	5825MHz	14.17	18.00	Complies

Configuration IEEE 802.11a Ant. 1-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	14.48	18.00	Complies
157	5785 MHz	14.57	18.00	Complies
165	5825MHz	15.50	18.00	Complies

Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.34	18.00	Complies
157	5785 MHz	17.38	18.00	Complies
165	5825MHz	17.90	18.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 2>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 2

Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.08	28.00	Complies
159	5795 MHz	18.98	28.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 2-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.49	28.00	Complies
159	5795 MHz	19.34	28.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 + Ant. 2-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	23.30	28.00	Complies
159	5795 MHz	22.17	28.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a / Antenna 2

Configuration IEEE 802.11a Ant. 2-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.00	28.00	Complies
157	5785 MHz	18.40	28.00	Complies
165	5825MHz	17.84	28.00	Complies

Configuration IEEE 802.11a Ant. 2-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.03	28.00	Complies
157	5785 MHz	18.78	28.00	Complies
165	5825MHz	18.43	28.00	Complies

Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	22.03	28.00	Complies
157	5785 MHz	21.60	28.00	Complies
165	5825MHz	21.16	28.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 3>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 3

Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	14.02	26.00	Complies
159	5795 MHz	13.58	26.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 3-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	14.78	26.00	Complies
159	5795 MHz	13.69	26.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1 + Ant. 3-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	17.43	26.00	Complies
159	5795 MHz	16.65	26.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a / Antenna 3

Configuration IEEE 802.11a Ant. 3-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	14.07	26.00	Complies
157	5785 MHz	13.55	26.00	Complies
165	5825MHz	12.53	26.00	Complies

Configuration IEEE 802.11a Ant. 3-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	14.90	26.00	Complies
157	5785 MHz	13.92	26.00	Complies
165	5825MHz	13.15	26.00	Complies

Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.52	26.00	Complies
157	5785 MHz	16.75	26.00	Complies
165	5825MHz	15.86	26.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 4>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 4

<For 2.4GHz Band>

Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.46	30.00	Complies
6	2437 MHz	18.77	30.00	Complies
9	2452 MHz	15.00	30.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.27	30.00	Complies
6	2437 MHz	18.51	30.00	Complies
9	2452 MHz	14.60	30.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	16.38	30.00	Complies
6	2437 MHz	21.65	30.00	Complies
9	2452 MHz	17.81	30.00	Complies

<For 5GHz Band>

Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.08	30.00	Complies
159	5795 MHz	18.98	30.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	20.49	30.00	Complies
159	5795 MHz	19.34	30.00	Complies

Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	23.30	30.00	Complies
159	5795 MHz	22.17	30.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a/b/g / Antenna 4

<For 2.4GHz Band>

Configuration IEEE 802.11b Ant. 4-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.12	30.00	Complies
6	2437 MHz	18.37	30.00	Complies
11	2462 MHz	17.14	30.00	Complies

Configuration IEEE 802.11b Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.03	30.00	Complies
6	2437 MHz	18.22	30.00	Complies
11	2462 MHz	16.57	30.00	Complies

Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.09	30.00	Complies
6	2437 MHz	21.31	30.00	Complies
11	2462 MHz	19.87	30.00	Complies

Configuration IEEE 802.11g Ant. 4-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.64	30.00	Complies
6	2437 MHz	21.48	30.00	Complies
11	2462 MHz	16.99	30.00	Complies

Configuration IEEE 802.11g Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.14	30.00	Complies
6	2437 MHz	20.88	30.00	Complies
11	2462 MHz	16.81	30.00	Complies

Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.41	30.00	Complies
6	2437 MHz	24.20	30.00	Complies
11	2462 MHz	19.91	30.00	Complies

<For 5GHz Band>:

Configuration IEEE 802.11a Ant. 4-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.00	30.00	Complies
157	5785 MHz	18.40	30.00	Complies
165	5825MHz	17.84	30.00	Complies

Configuration IEEE 802.11a Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.03	30.00	Complies
157	5785 MHz	18.78	30.00	Complies
165	5825MHz	18.43	30.00	Complies

Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	22.03	30.00	Complies
157	5785 MHz	21.60	30.00	Complies
165	5825MHz	21.16	30.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 5>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 5

Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.51	27.00	Complies
6	2437 MHz	18.16	27.00	Complies
9	2452 MHz	15.03	27.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.22	27.00	Complies
6	2437 MHz	17.81	27.00	Complies
9	2452 MHz	14.71	27.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	17.38	27.00	Complies
6	2437 MHz	21.00	27.00	Complies
9	2452 MHz	17.88	27.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b/g / Antenna 5

Configuration IEEE 802.11b Ant. 5-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	12.87	27.00	Complies
6	2437 MHz	16.61	27.00	Complies
11	2462 MHz	10.95	27.00	Complies

Configuration IEEE 802.11b Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	12.20	27.00	Complies
6	2437 MHz	16.51	27.00	Complies
11	2462 MHz	10.63	27.00	Complies

Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.56	27.00	Complies
6	2437 MHz	19.57	27.00	Complies
11	2462 MHz	13.80	27.00	Complies

Configuration IEEE 802.11g Ant. 5-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.59	27.00	Complies
6	2437 MHz	20.86	27.00	Complies
11	2462 MHz	18.16	27.00	Complies

Configuration IEEE 802.11g Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.05	27.00	Complies
6	2437 MHz	20.41	27.00	Complies
11	2462 MHz	17.41	27.00	Complies

Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.34	27.00	Complies
6	2437 MHz	23.65	27.00	Complies
11	2462 MHz	20.81	27.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 6>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 6

Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.49	27.00	Complies
6	2437 MHz	19.73	27.00	Complies
9	2452 MHz	16.62	27.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.08	27.00	Complies
6	2437 MHz	19.50	27.00	Complies
9	2452 MHz	16.21	27.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	18.30	27.00	Complies
6	2437 MHz	22.63	27.00	Complies
9	2452 MHz	19.43	27.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b/g / Antenna 6

Configuration IEEE 802.11b Ant. 6-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.89	27.00	Complies
6	2437 MHz	17.34	27.00	Complies
11	2462 MHz	17.82	27.00	Complies

Configuration IEEE 802.11b Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.26	27.00	Complies
6	2437 MHz	17.25	27.00	Complies
11	2462 MHz	17.62	27.00	Complies

Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.60	27.00	Complies
6	2437 MHz	20.31	27.00	Complies
11	2462 MHz	20.73	27.00	Complies

Configuration IEEE 802.11g Ant. 6-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.12	27.00	Complies
6	2437 MHz	22.66	27.00	Complies
11	2462 MHz	18.60	27.00	Complies

Configuration IEEE 802.11g Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.88	27.00	Complies
6	2437 MHz	21.84	27.00	Complies
11	2462 MHz	17.76	27.00	Complies

Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.55	27.00	Complies
6	2437 MHz	25.28	27.00	Complies
11	2462 MHz	21.21	27.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 7>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 7

Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.22	30.00	Complies
6	2437 MHz	21.28	30.00	Complies
9	2452 MHz	20.59	30.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 7-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.20	30.00	Complies
6	2437 MHz	21.11	30.00	Complies
9	2452 MHz	20.27	30.00	Complies

Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	22.22	30.00	Complies
6	2437 MHz	24.21	30.00	Complies
9	2452 MHz	23.44	30.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b/g / Antenna 7

Configuration IEEE 802.11b Ant. 7-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.51	30.00	Complies
6	2437 MHz	14.20	30.00	Complies
11	2462 MHz	10.28	30.00	Complies

Configuration IEEE 802.11b Ant. 7-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.27	30.00	Complies
6	2437 MHz	13.53	30.00	Complies
11	2462 MHz	9.73	30.00	Complies

Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.40	30.00	Complies
6	2437 MHz	16.89	30.00	Complies
11	2462 MHz	13.02	30.00	Complies

Configuration IEEE 802.11g Ant. 7-1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.32	30.00	Complies
6	2437 MHz	20.37	30.00	Complies
11	2462 MHz	19.70	30.00	Complies

Configuration IEEE 802.11g Ant. 7-2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.12	30.00	Complies
6	2437 MHz	20.01	30.00	Complies
11	2462 MHz	20.06	30.00	Complies

Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	25.23	30.00	Complies
6	2437 MHz	23.20	30.00	Complies
11	2462 MHz	22.89	30.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.


<For Antenna 1>:

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-1 / 5745 MHz

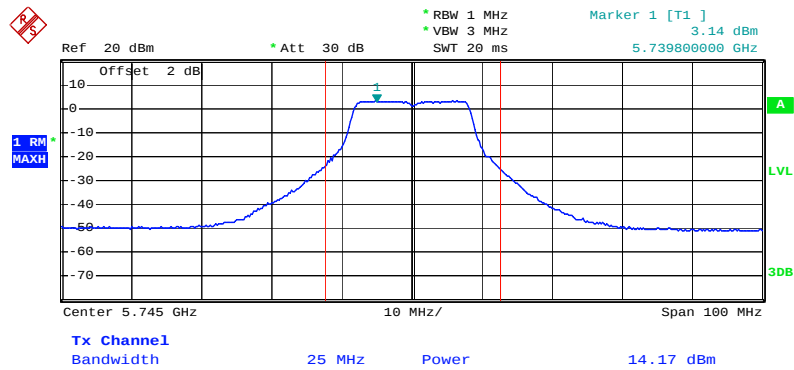


Date: 30.MAY.2010 11:49:14

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-1 / 5785 MHz

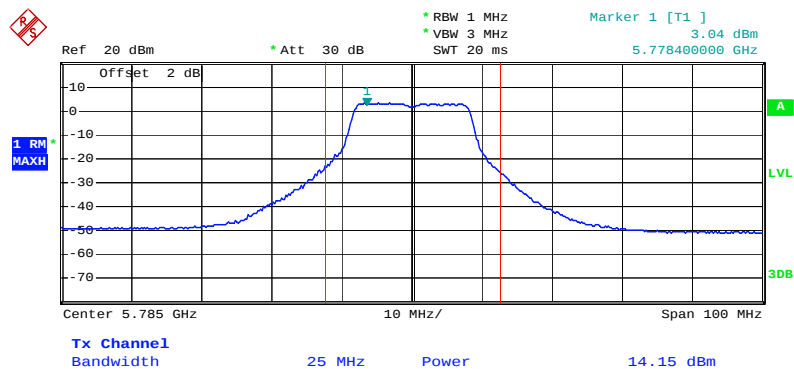


Date: 30.MAY.2010 11:51:48

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-1 / 5825MHz

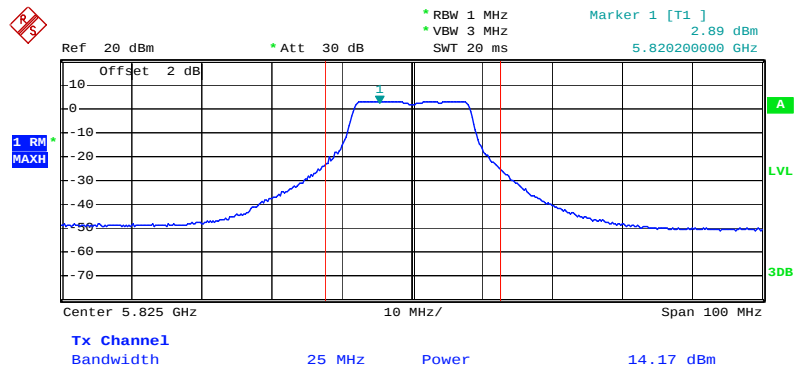


Date: 30.MAY.2010 11:52:51

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-2 / 5745 MHz

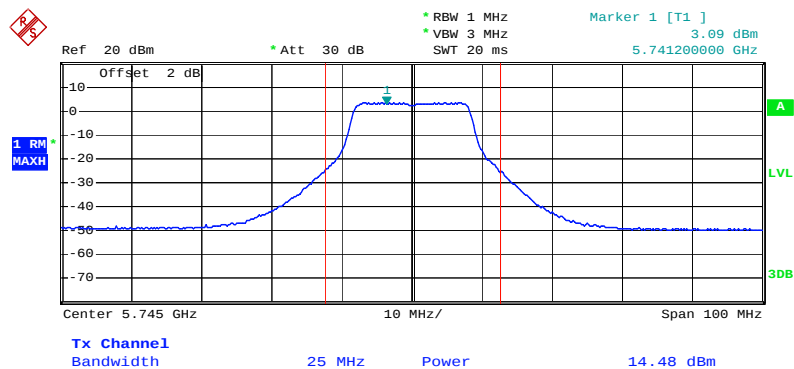


Date: 30.MAY.2010 11:49:50

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-2 / 5785 MHz

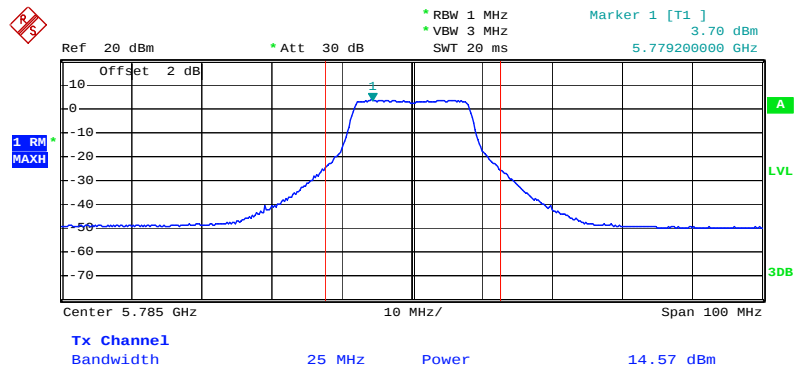

Date: 30.MAY.2010 11:51:13


Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1-2 / 5825 MHz

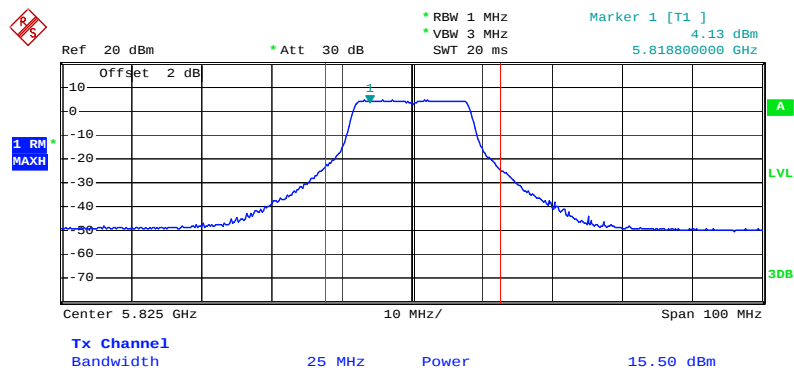

Date: 30.MAY.2010 11:53:27


<For Antenna 2>:

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 / 5755 MHz

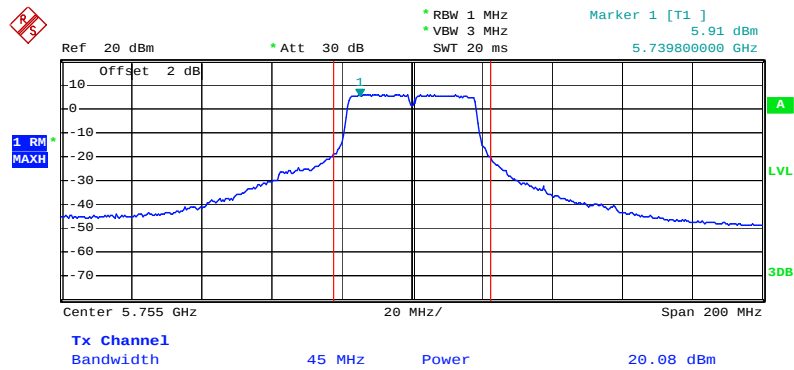


Date: 27.MAY.2010 15:30:39

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 / 5795 MHz

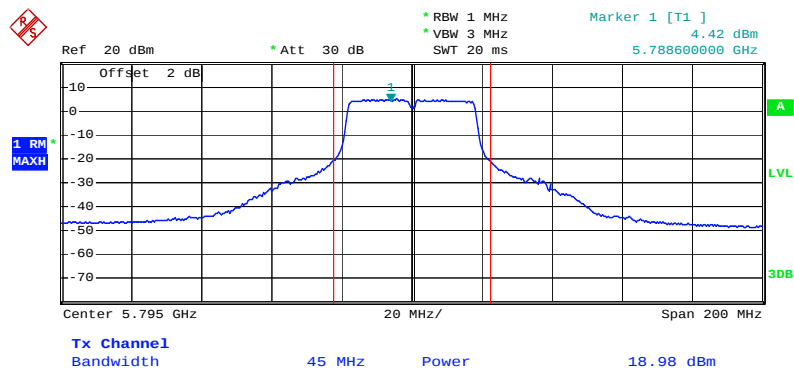


Date: 27.MAY.2010 15:32:40

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-2 / 5755 MHz

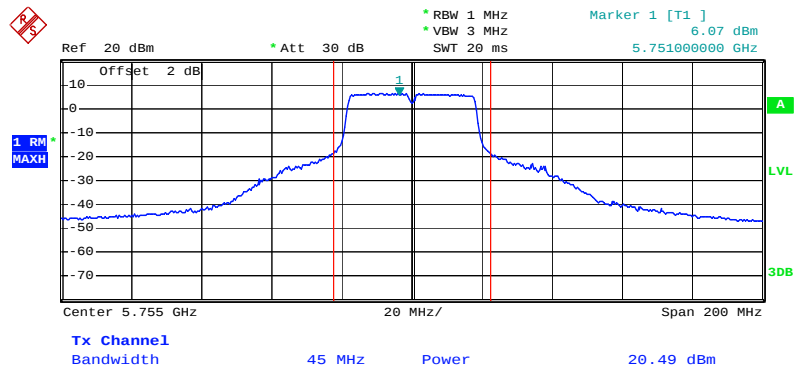

Date: 27.MAY.2010 15:29:54


Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-2 / 5795 MHz

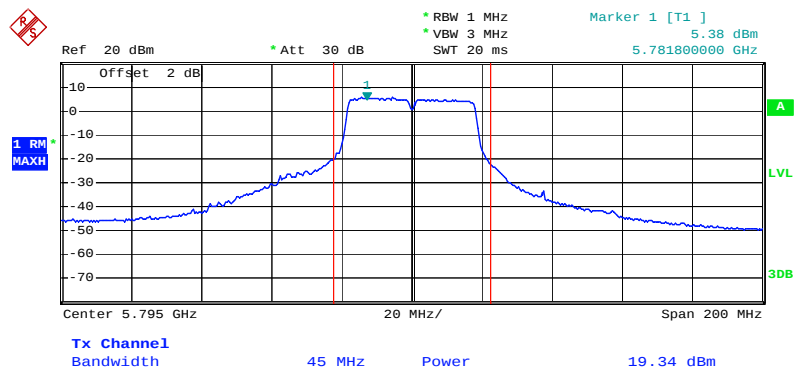

Date: 27.MAY.2010 15:32:04


<For Antenna 3>:

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-1 / 5745 MHz

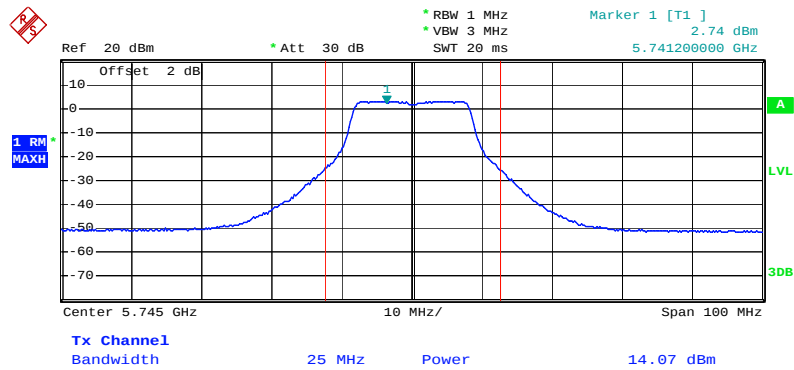


Date: 30.MAY.2010 18:11:53

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-1 / 5785 MHz

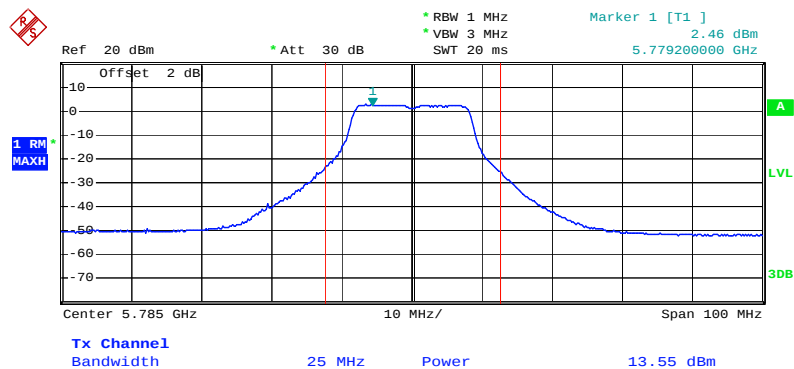


Date: 30.MAY.2010 18:13:27

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-1 / 5825MHz

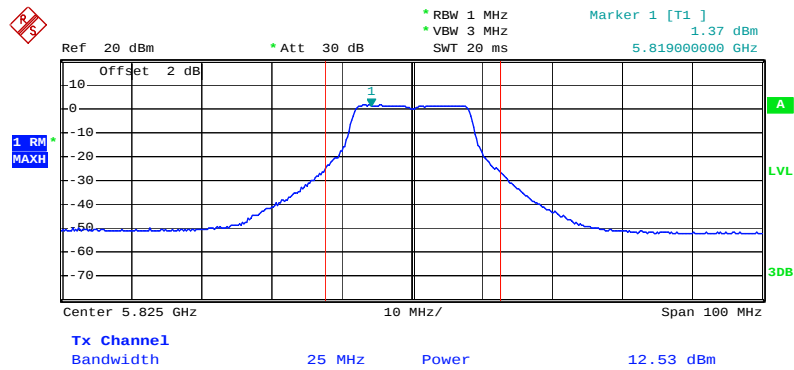


Date: 30.MAY.2010 18:14:04

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-2 / 5745 MHz

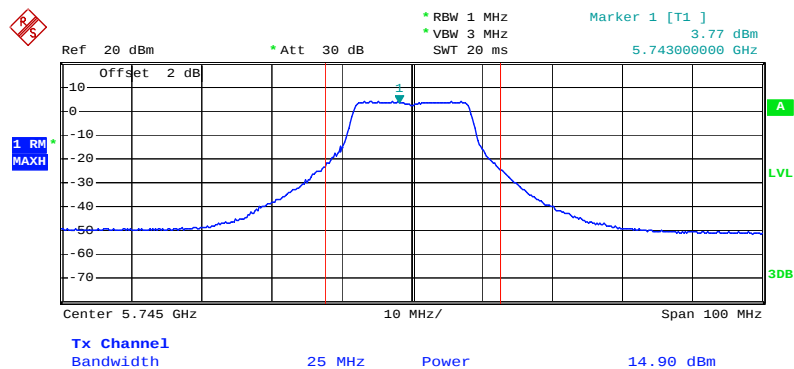


Date: 30.MAY.2010 18:11:28

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-2 / 5785 MHz

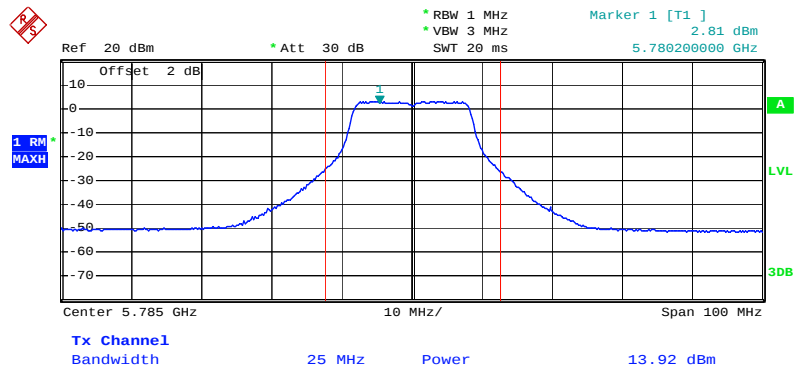

Date: 30.MAY.2010 18:12:39


Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3-2 / 5825MHz

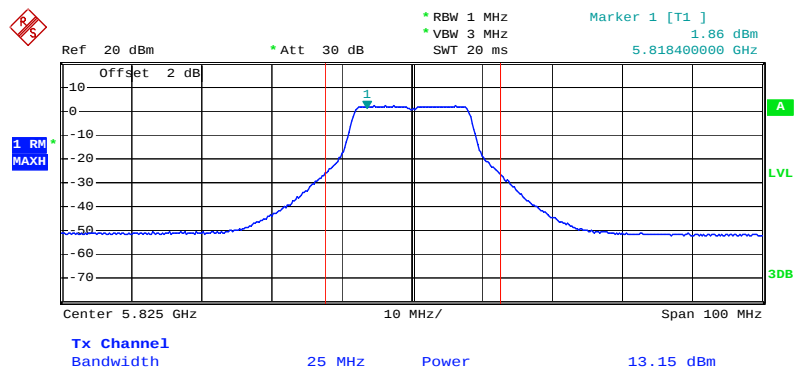

Date: 30.MAY.2010 18:14:36


<For Antenna 4>:

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 / 5755 MHz

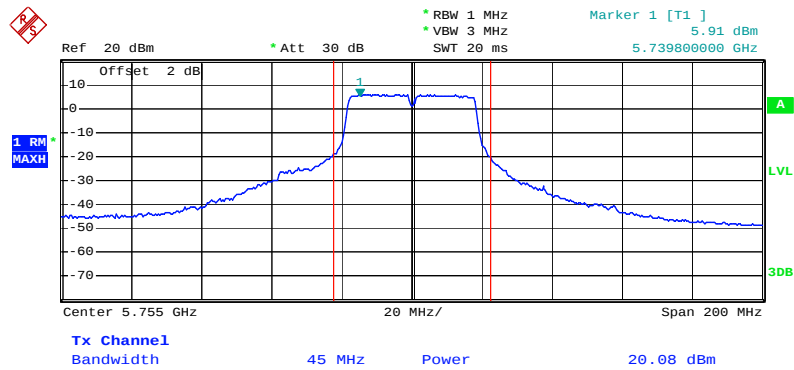


Date: 27.MAY.2010 15:30:39

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 / 5795 MHz

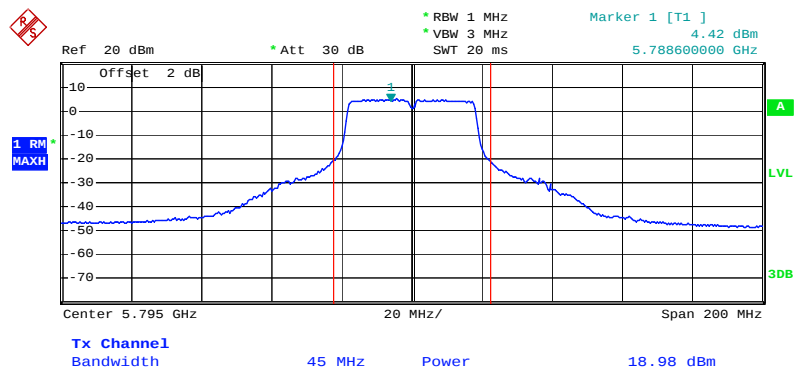


Date: 27.MAY.2010 15:32:40

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4-2 / 5755 MHz

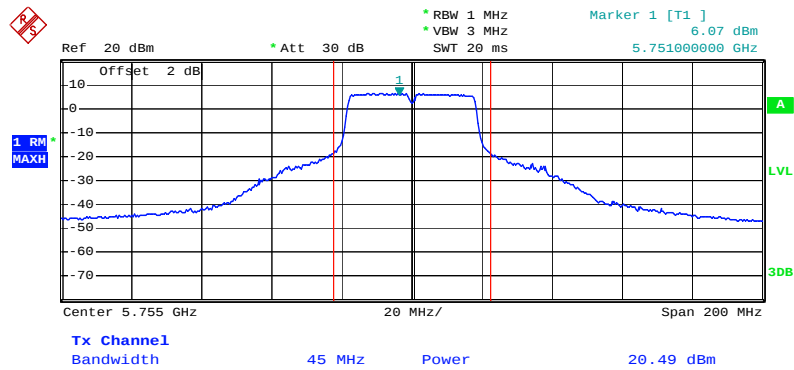


Date: 27.MAY.2010 15:29:54

Channel Output Power Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4-2 / 5795 MHz

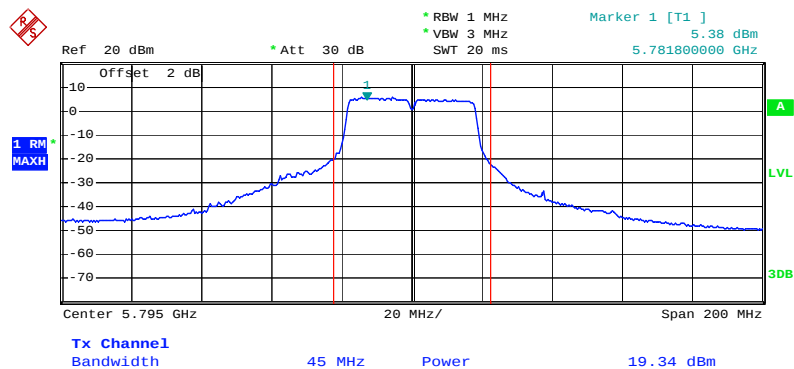


Date: 27.MAY.2010 15:32:04

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-1 / 2412 MHz

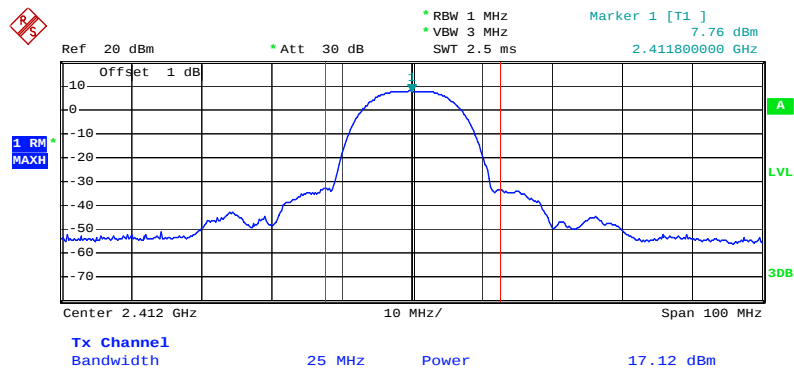


Date: 27.MAY.2010 15:48:54

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-1 / 2437 MHz

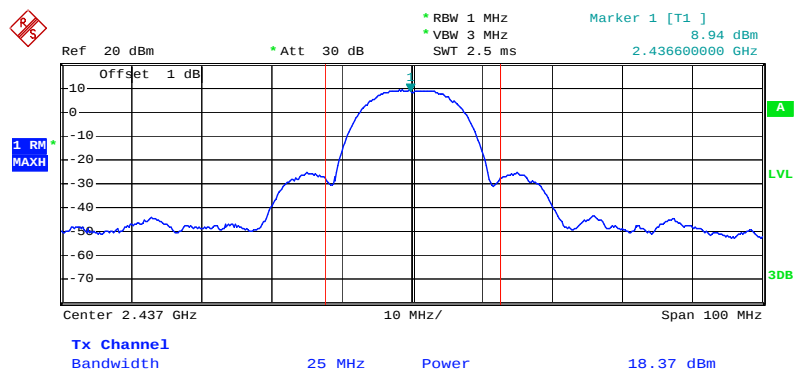


Date: 27.MAY.2010 15:51:03

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-1 / 2462 MHz

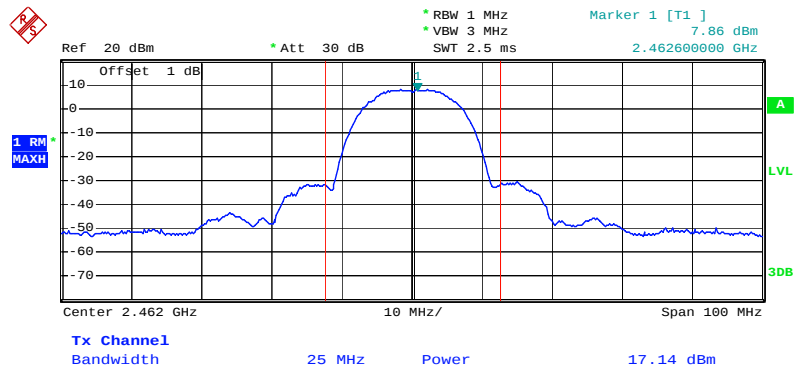


Date: 27.MAY.2010 15:52:33

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-2 / 2412 MHz

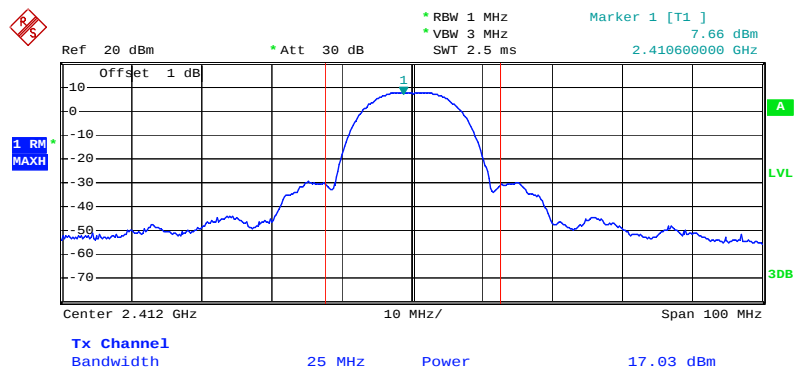


Date: 27.MAY.2010 15:48:25

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-2 / 2437 MHz

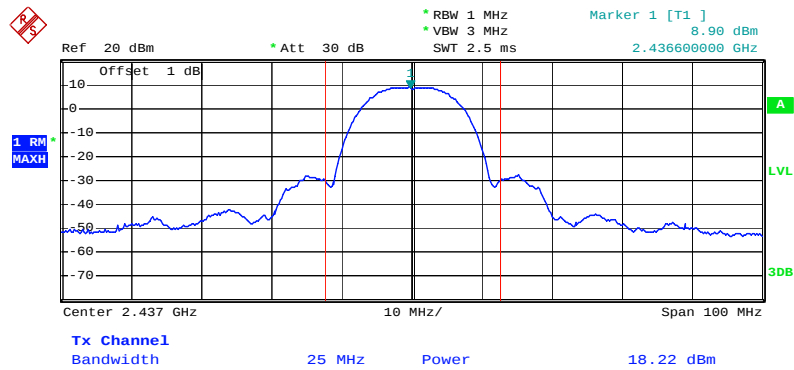


Date: 27.MAY.2010 15:50:31

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 4-2 / 2462 MHz

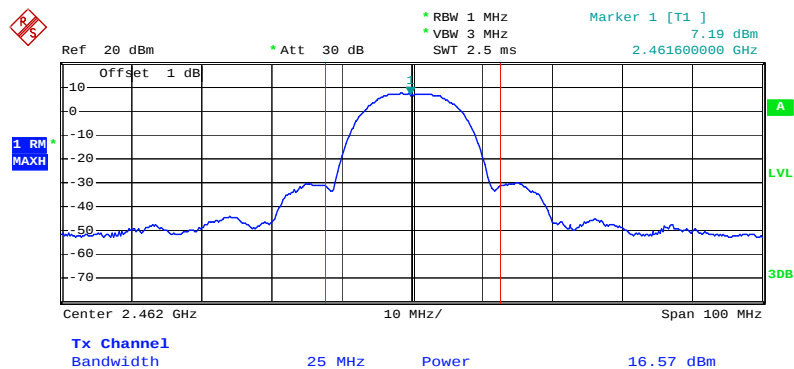


Date: 27.MAY.2010 15:51:57

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-1 / 2412 MHz

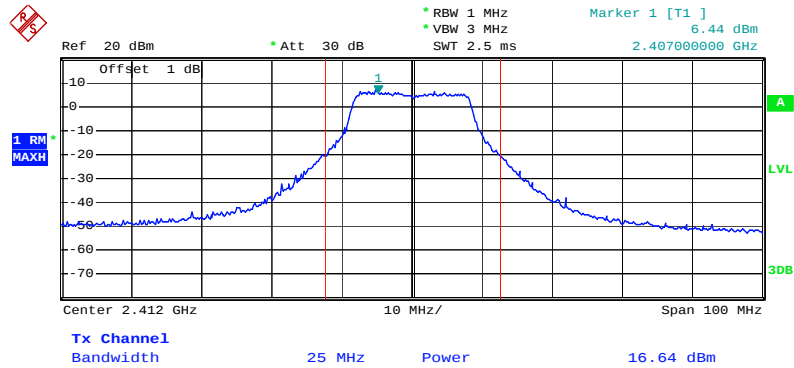


Date: 27.MAY.2010 15:46:54

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-1 / 2437 MHz

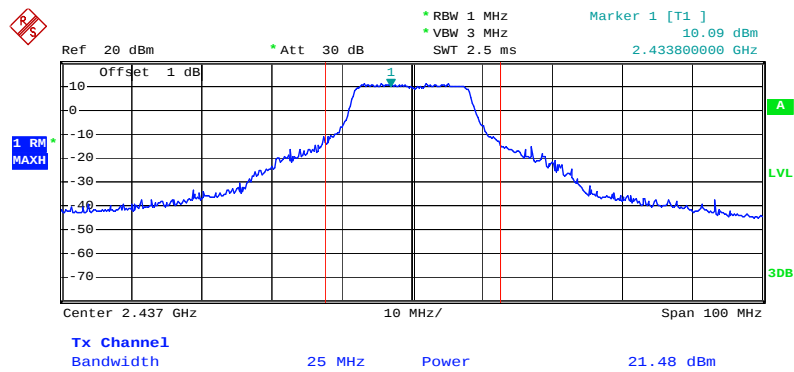


Date: 27.MAY.2010 15:46:13

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-1 / 2462 MHz

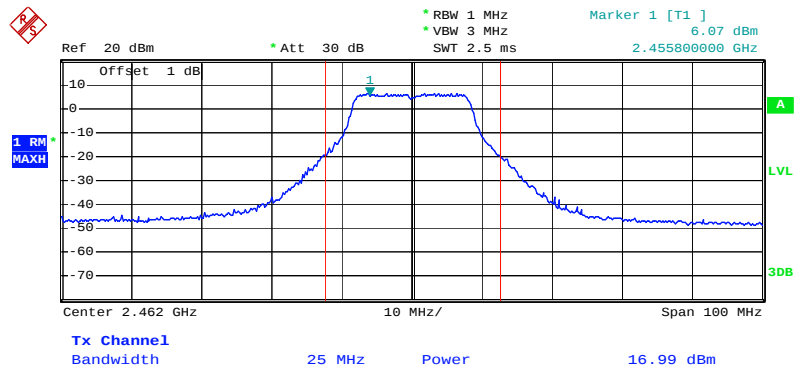


Date: 27.MAY.2010 15:43:34

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-2 / 2412 MHz

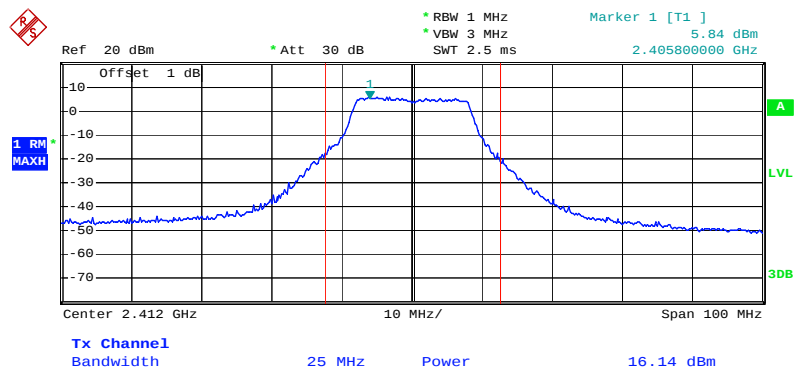


Date: 27.MAY.2010 15:47:32

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-2 / 2437 MHz

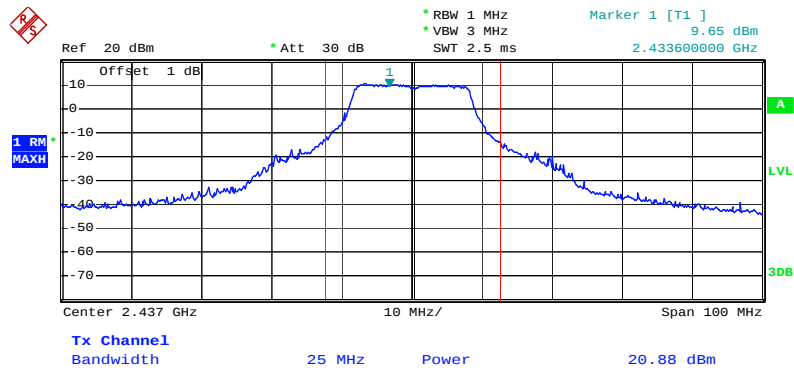

Date: 27.MAY.2010 15:45:34


Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 4-2 / 2462 MHz

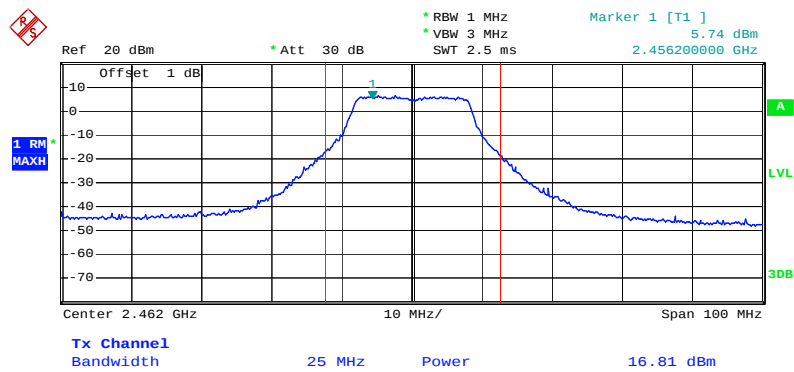

Date: 27.MAY.2010 15:44:43


<For Antenna 5>:

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-1 / 2412 MHz

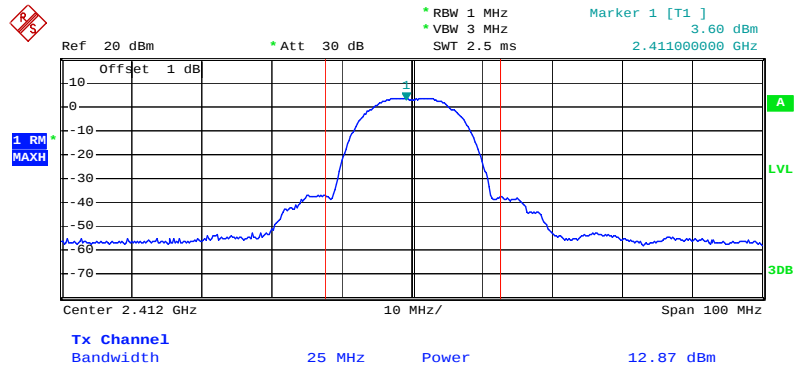


Date: 28.MAY.2010 10:32:51

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-1 / 2437 MHz

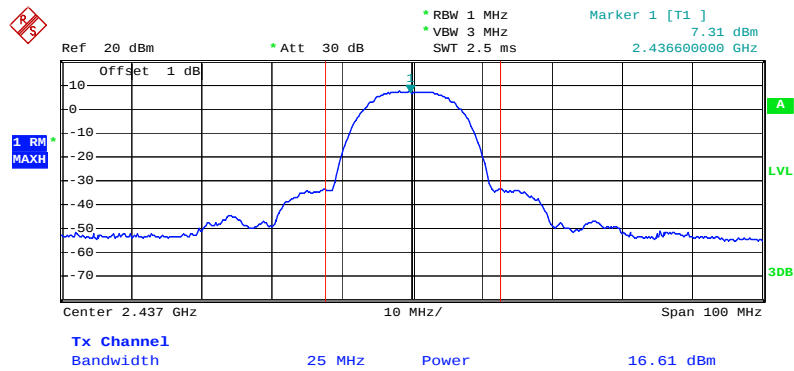


Date: 28.MAY.2010 10:34:26

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-1 / 2462 MHz

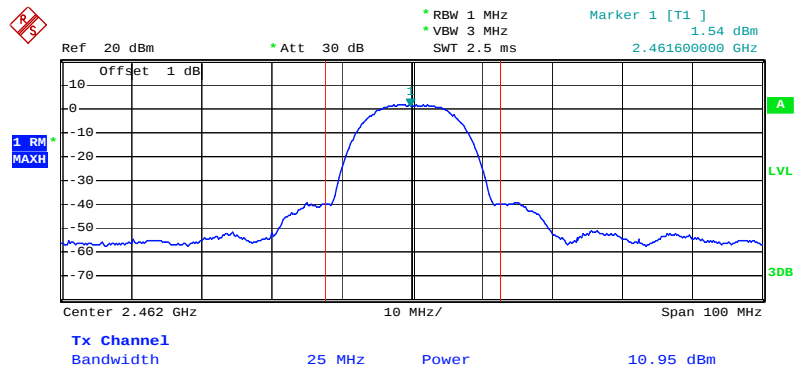


Date: 28.MAY.2010 10:35:50

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-2 / 2412 MHz

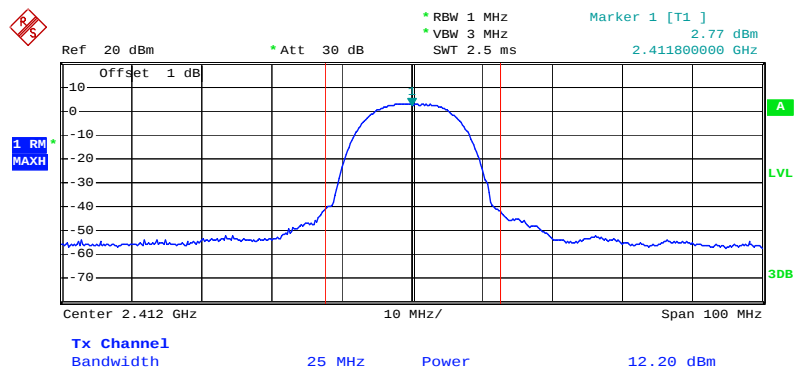


Date: 28.MAY.2010 10:33:23

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-2 / 2437 MHz

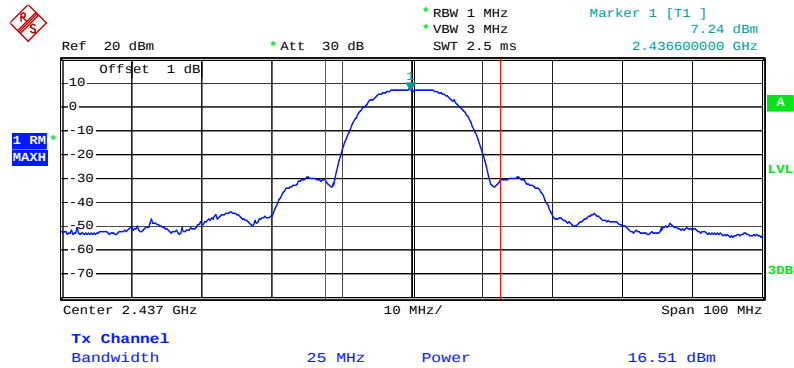


Date: 28.MAY.2010 10:35:17

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 5-2 / 2462 MHz

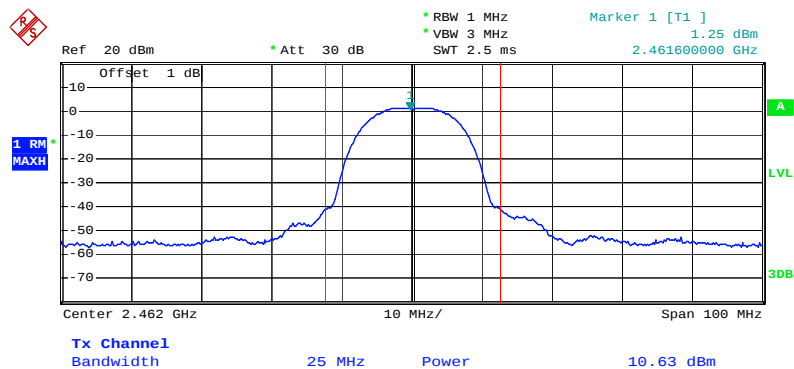


Date: 28.MAY.2010 10:36:27

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-1 / 2412 MHz

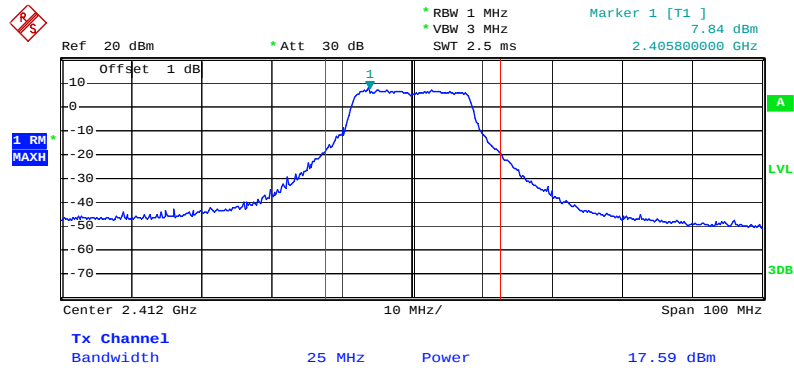


Date: 28.MAY.2010 10:40:18

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-1 / 2437 MHz

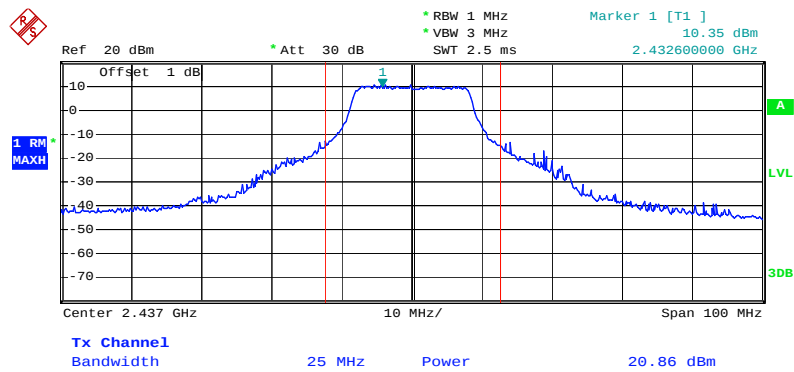


Date: 28.MAY.2010 10:39:23

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-1 / 2462 MHz

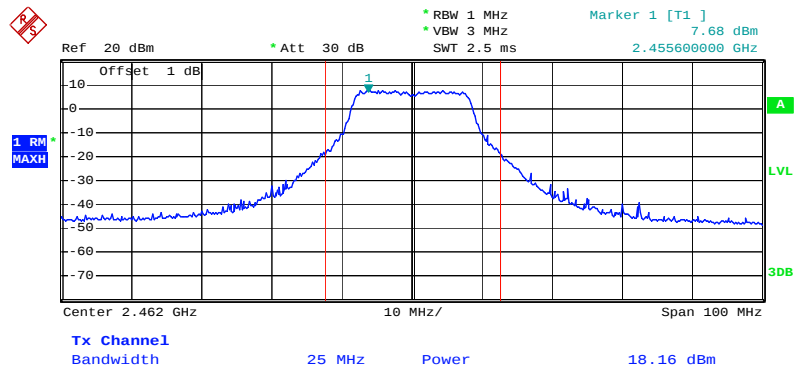


Date: 28.MAY.2010 10:37:06

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-2 / 2412 MHz

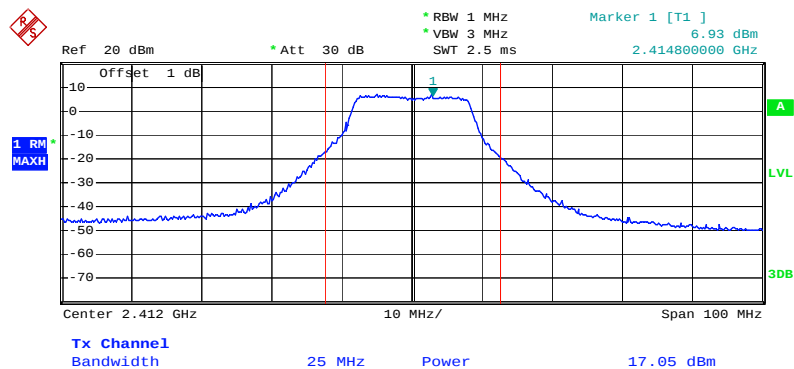


Date: 28.MAY.2010 10:40:54

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-2 / 2437 MHz

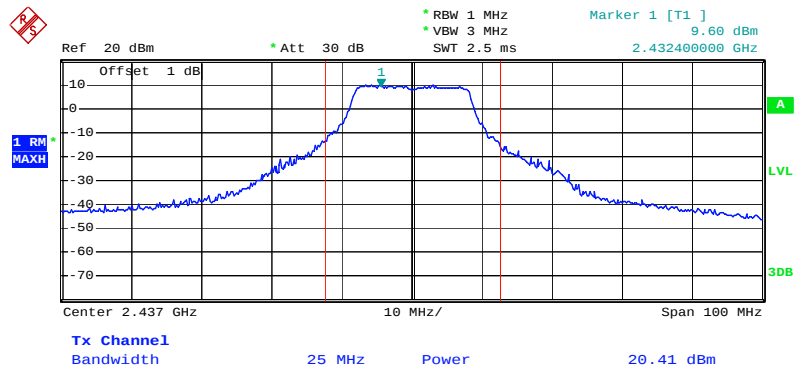

Date: 28.MAY.2010 10:38:28


Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 5-2 / 2462 MHz

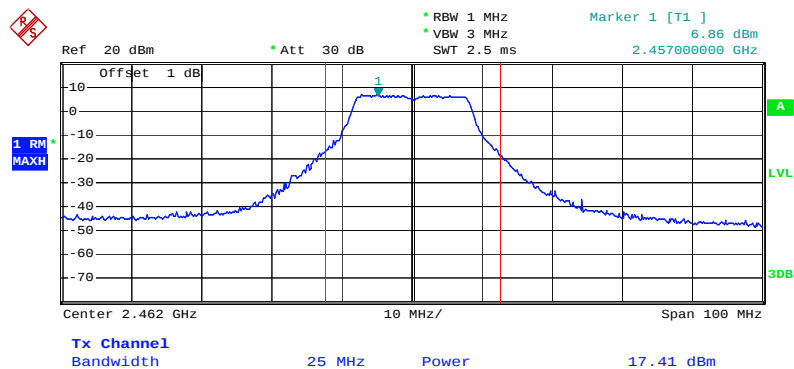

Date: 28.MAY.2010 10:37:33


<For Antenna 6>:

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-1 / 2412 MHz

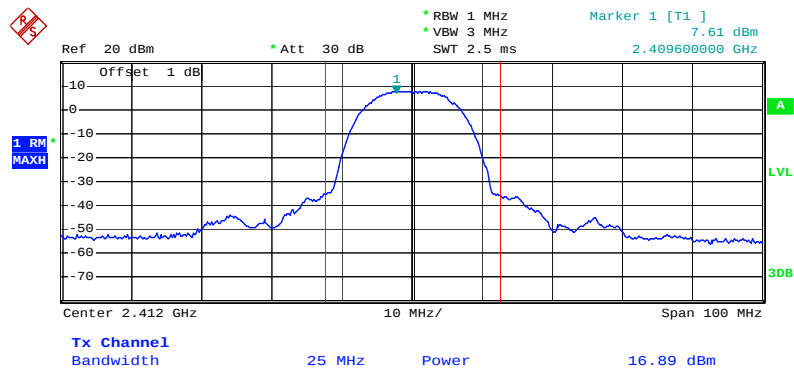


Date: 28.MAY.2010 16:05:11

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-1 / 2437 MHz

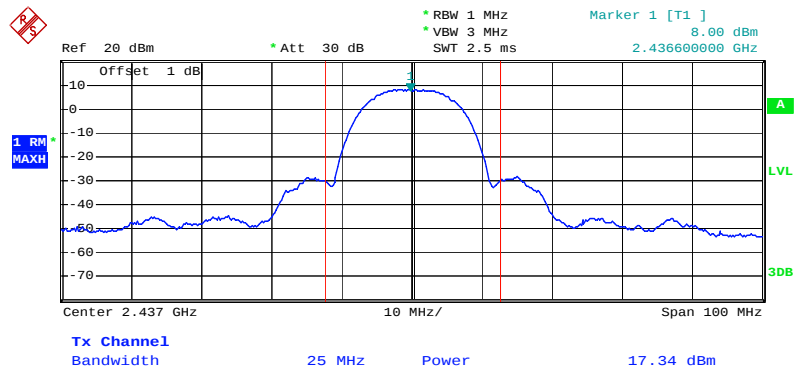


Date: 28.MAY.2010 16:06:39

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-1 / 2462 MHz

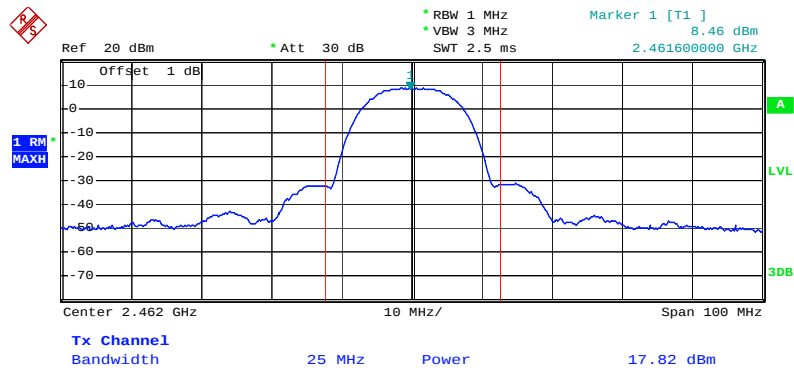


Date: 28.MAY.2010 16:08:11

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-2 / 2412 MHz

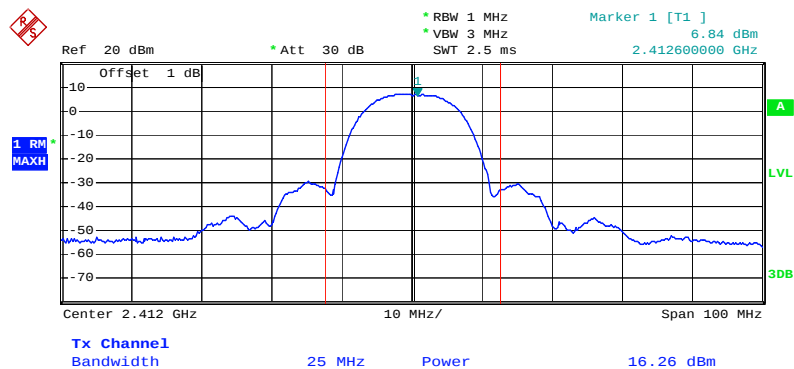


Date: 28.MAY.2010 16:04:32

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-2 / 2437 MHz

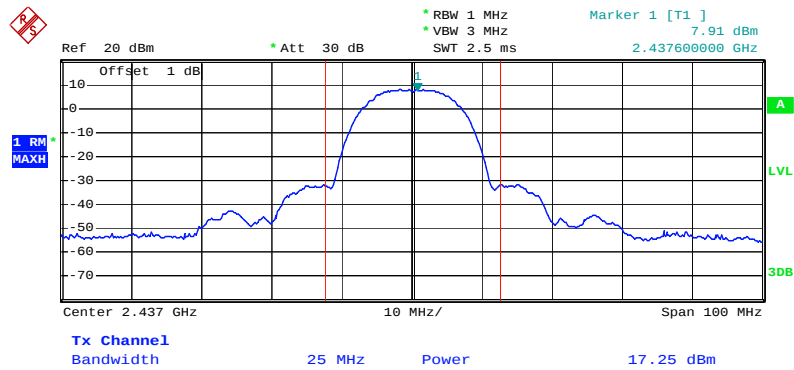


Date: 28.MAY.2010 16:06:02

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 6-2 / 2462 MHz

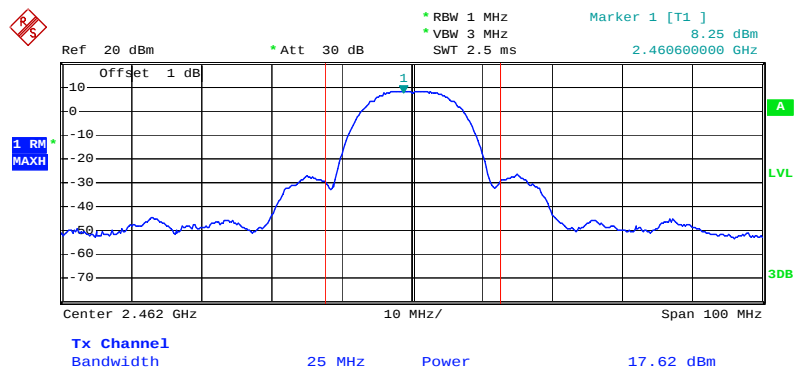


Date: 28.MAY.2010 16:07:24

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-1 / 2412 MHz

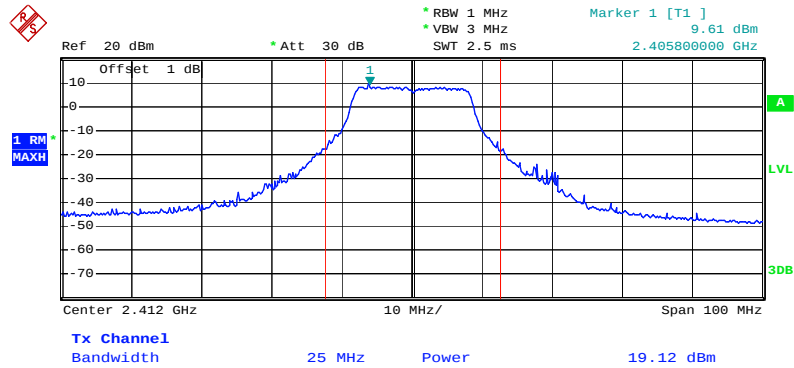


Date: 28.MAY.2010 16:15:36

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-1 / 2437 MHz

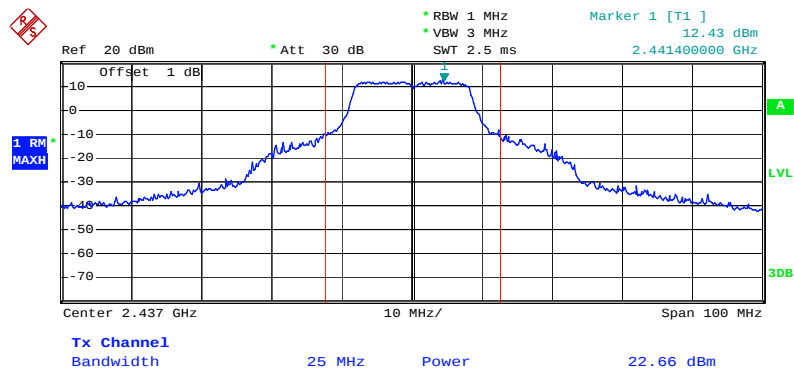


Date: 28.MAY.2010 16:11:55

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-1 / 2462 MHz

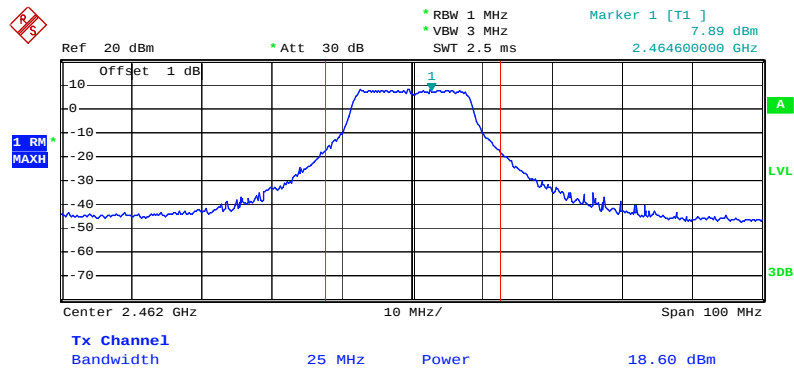


Date: 28.MAY.2010 16:17:59

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-2 / 2412 MHz

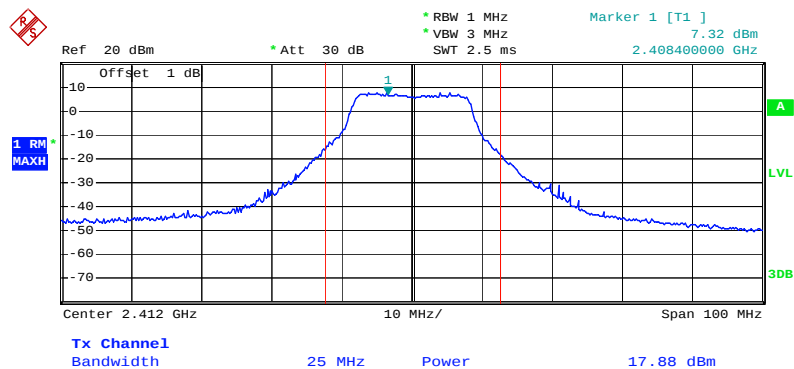


Date: 28.MAY.2010 16:16:19

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-2 / 2437 MHz

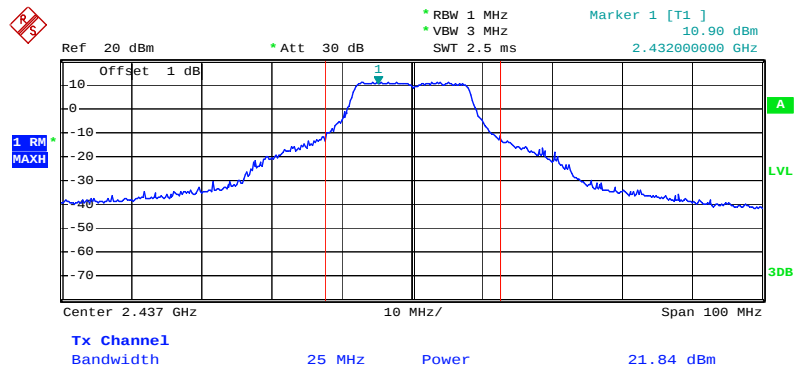

Date: 28.MAY.2010 16:11:20


Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 6-2 / 2462 MHz

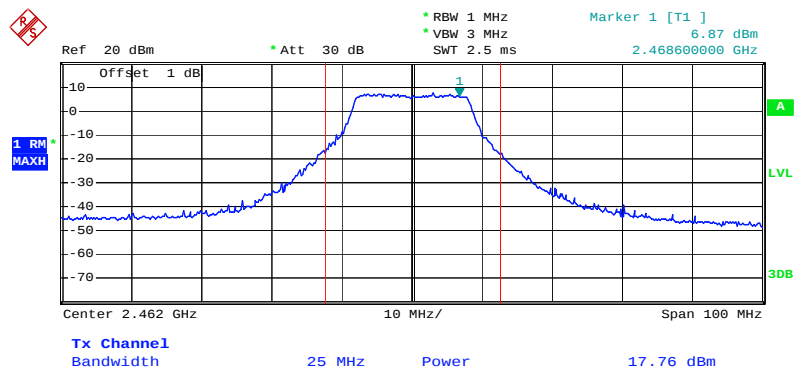

Date: 28.MAY.2010 16:17:18


<For Antenna 7>:

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-1 / 2412 MHz

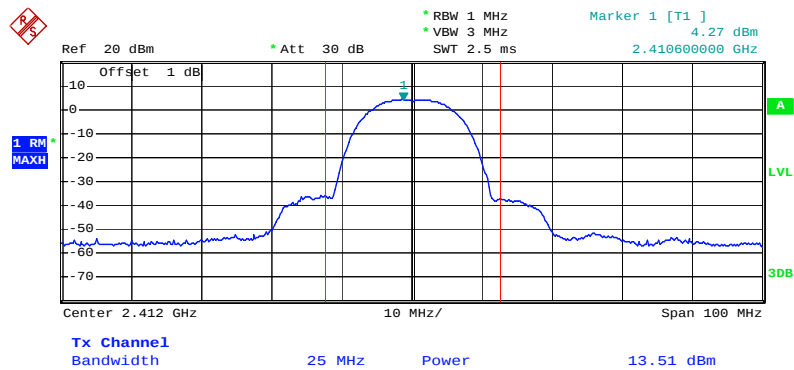


Date: 28.MAY.2010 16:37:46

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-1 / 2437 MHz

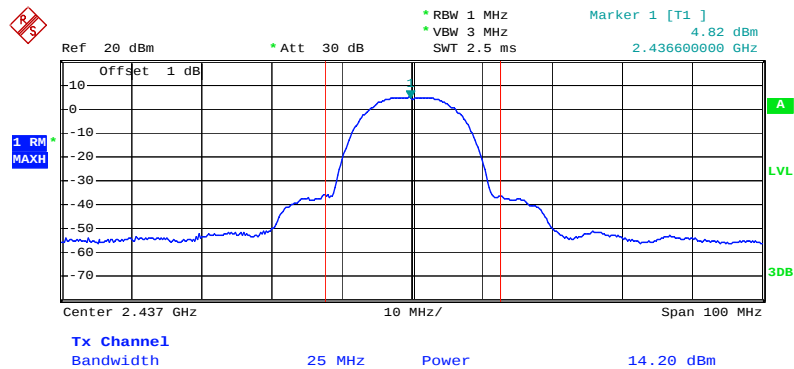


Date: 28.MAY.2010 16:39:17

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-1 / 2462 MHz

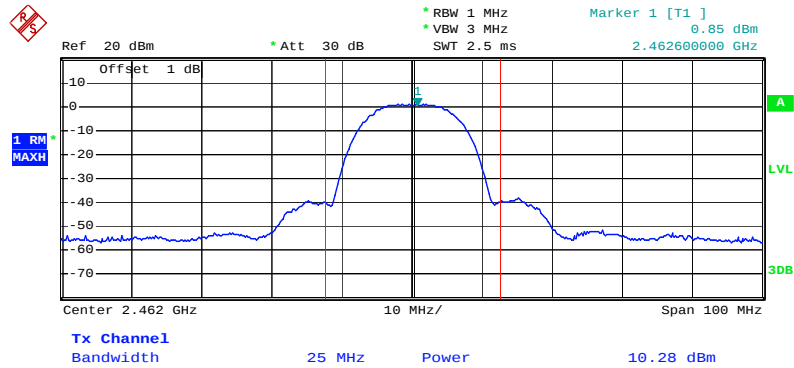


Date: 28.MAY.2010 16:41:20

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-2 / 2412 MHz

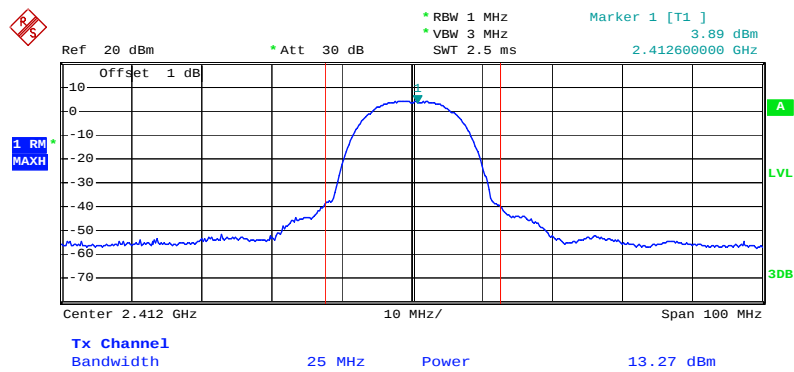


Date: 28.MAY.2010 16:38:05

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-2 / 2437 MHz

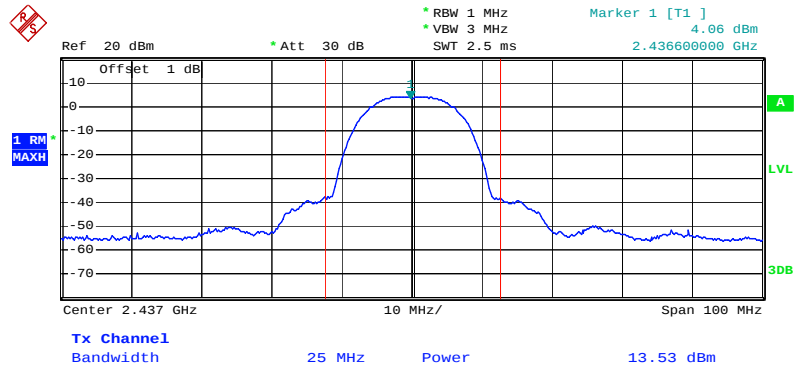


Date: 28.MAY.2010 16:39:48

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 7-2 / 2462 MHz

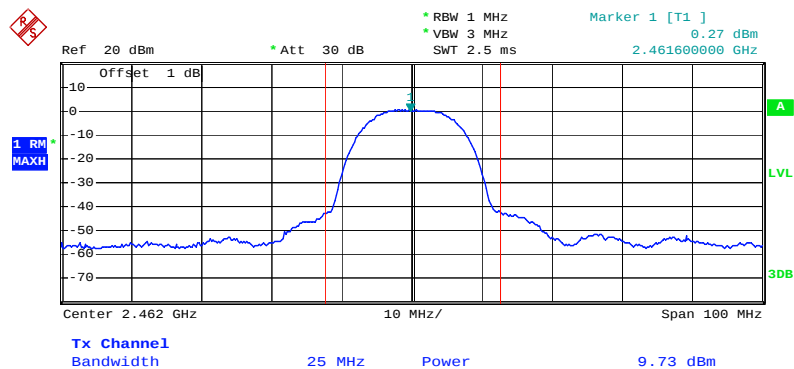


Date: 28.MAY.2010 16:40:37

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-1 / 2412 MHz

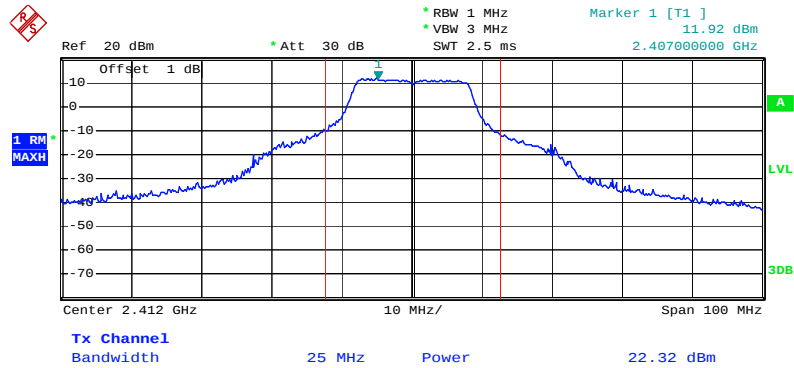


Date: 28.MAY.2010 16:35:19

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-1 / 2437 MHz

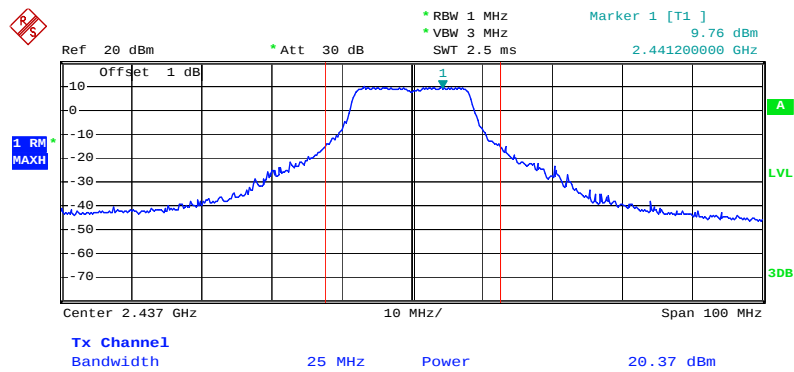


Date: 28.MAY.2010 16:32:49

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-1 / 2462 MHz

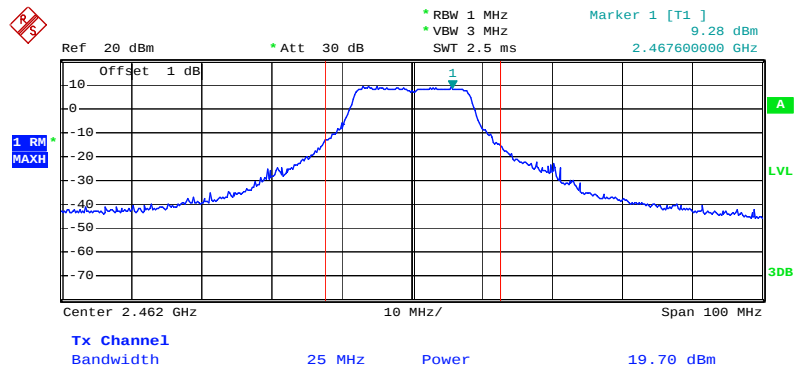


Date: 28.MAY.2010 16:31:21

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-2 / 2412 MHz

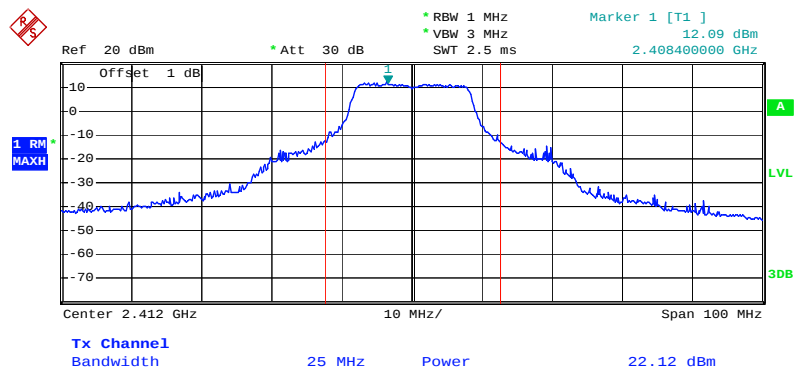


Date: 28.MAY.2010 16:33:52

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-2 / 2437 MHz

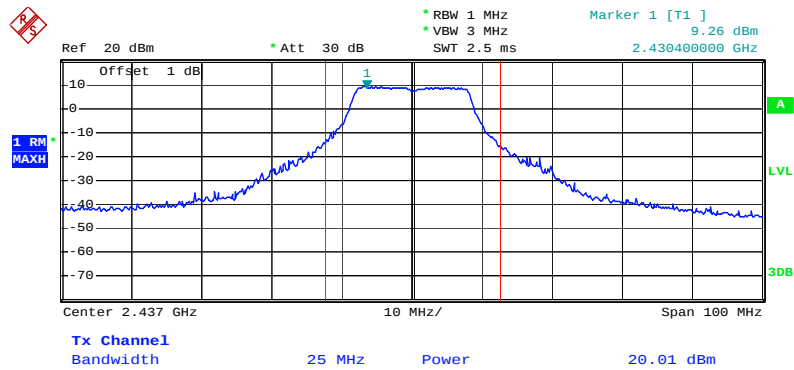

Date: 28.MAY.2010 16:32:11

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 7-2 / 2462 MHz

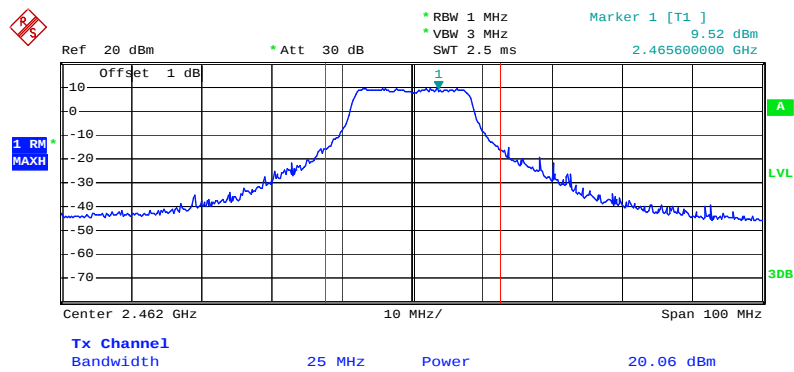

Date: 28.MAY.2010 16:30:29

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.3.4. Test Setup Layout

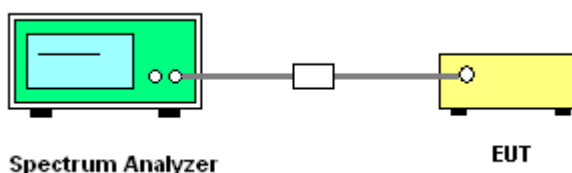

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For Antenna 1>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 1

Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1 + Ant. 1-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
151	5755 MHz	-4.60	8.00	Complies
159	5795 MHz	-4.09	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a / Antenna 1

Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-2.97	8.00	Complies
157	5785 MHz	-3.36	8.00	Complies
165	5825 MHz	-4.24	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 2>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 2

Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 + Ant. 2-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
151	5755 MHz	-1.96	8.00	Complies
159	5795 MHz	-7.14	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a / Antenna 2

Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-1.21	8.00	Complies
157	5785 MHz	-1.40	8.00	Complies
165	5825 MHz	-1.62	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 3>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 3

Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1 + Ant. 3-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
151	5755 MHz	-8.21	8.00	Complies
159	5795 MHz	-11.42	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a / Antenna 3

Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-4.72	8.00	Complies
157	5785 MHz	-5.21	8.00	Complies
165	5825 MHz	-5.85	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of OFDM modulation was listed in the report.

<For Antenna 4>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 4

<For 2.4GHz Band>

Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-12.36	8.00	Complies
6	2437 MHz	-5.37	8.00	Complies
9	2452 MHz	-11.31	8.00	Complies

<For 5GHz Band>

Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
151	5755 MHz	-1.96	8.00	Complies
159	5795 MHz	-7.14	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a/b/g / Antenna 4

Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-0.17	8.00	Complies
6	2437 MHz	0.47	8.00	Complies
11	2462 MHz	-1.83	8.00	Complies

Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-4.85	8.00	Complies
6	2437 MHz	0.09	8.00	Complies
11	2462 MHz	-4.38	8.00	Complies

Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-1.21	8.00	Complies
157	5785 MHz	-1.40	8.00	Complies
165	5825 MHz	-1.62	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 5>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 5

Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-12.30	8.00	Complies
6	2437 MHz	-3.57	8.00	Complies
9	2452 MHz	-11.23	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 5

Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-4.99	8.00	Complies
6	2437 MHz	-1.01	8.00	Complies
11	2462 MHz	-7.20	8.00	Complies

Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-3.93	8.00	Complies
6	2437 MHz	-0.08	8.00	Complies
11	2462 MHz	-3.38	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 6>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 6

Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-7.95	8.00	Complies
6	2437 MHz	-5.45	8.00	Complies
9	2452 MHz	-6.21	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 6

Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-1.10	8.00	Complies
6	2437 MHz	-0.60	8.00	Complies
11	2462 MHz	-0.83	8.00	Complies

Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-3.62	8.00	Complies
6	2437 MHz	1.43	8.00	Complies
11	2462 MHz	-3.58	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.

<For Antenna 7>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 7

Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-2.01	8.00	Complies
6	2437 MHz	-2.89	8.00	Complies
9	2452 MHz	-4.87	8.00	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 7

Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-4.79	8.00	Complies
6	2437 MHz	-3.70	8.00	Complies
11	2462 MHz	-8.44	8.00	Complies

Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	1.06	8.00	Complies
6	2437 MHz	-1.01	8.00	Complies
11	2462 MHz	0.14	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the worse case of DSSS and OFDM modulation were listed in the report.


<For Antenna 1>:

Power Density Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5745 MHz

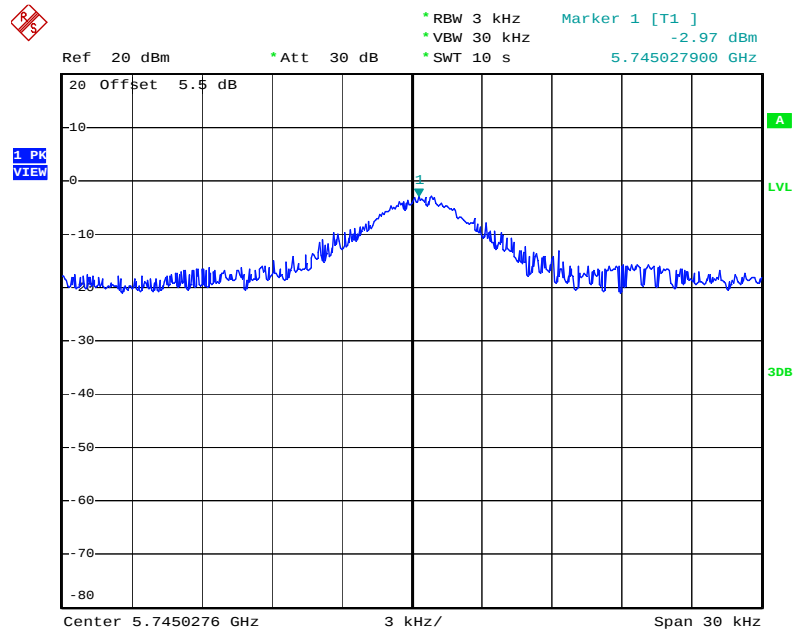


Date: 30.MAY.2010 12:05:53

Power Density Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5785 MHz

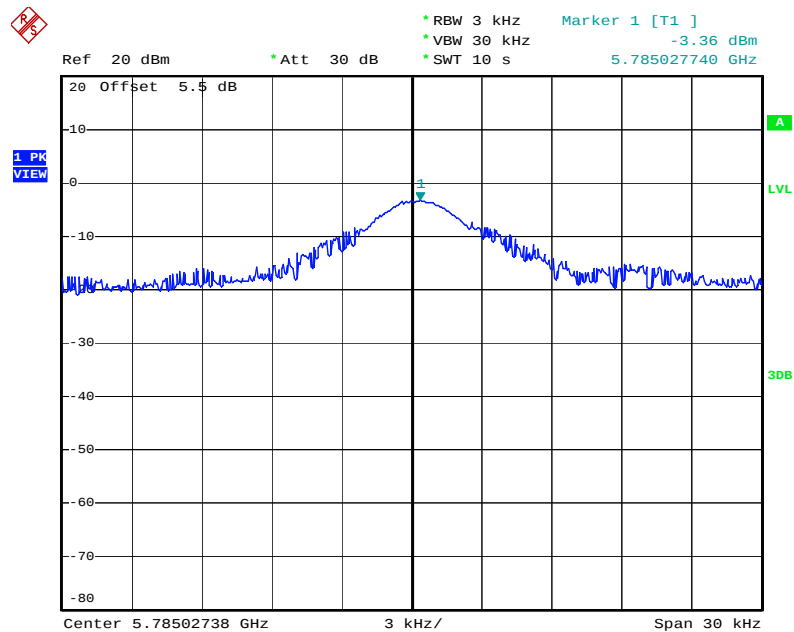

Date: 30.MAY.2010 11:59:40


Power Density Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5825 MHz

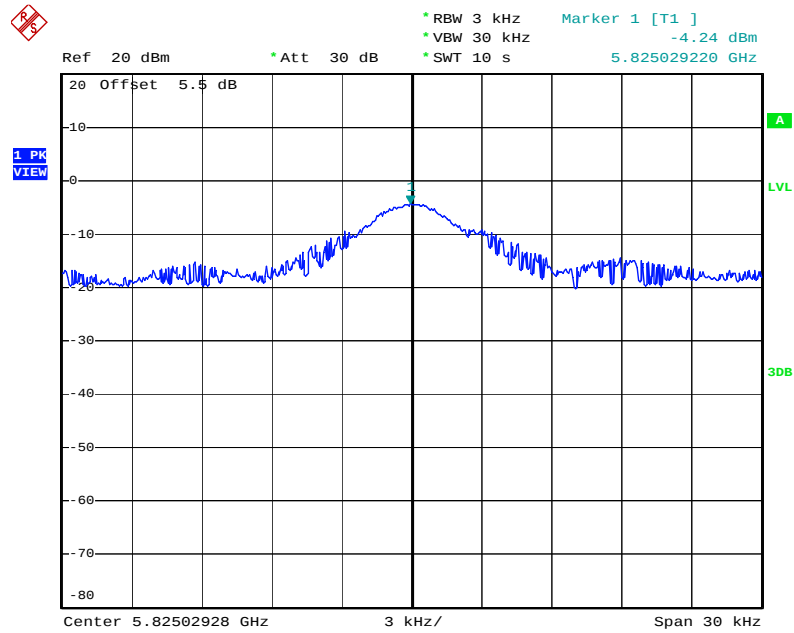

Date: 30.MAY.2010 11:57:26


<For Antenna 2>:

Power Density Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5745 MHz

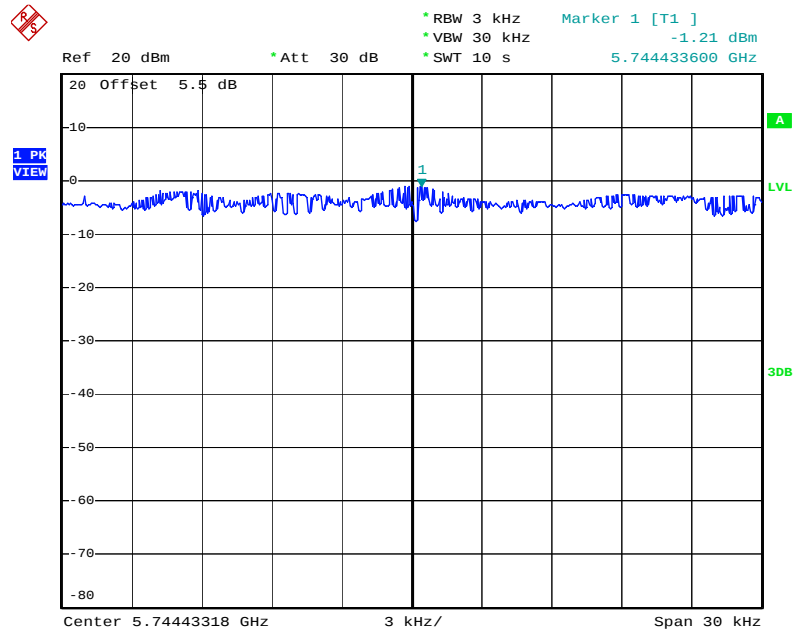


Date: 27.MAY.2010 17:17:38

Power Density Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5785 MHz

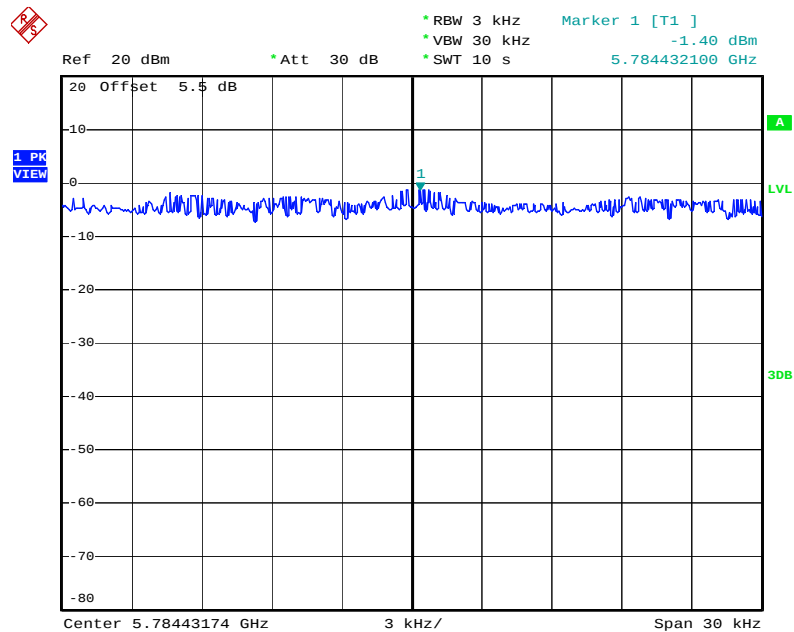

Date: 27.MAY.2010 17:19:48


Power Density Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5825 MHz

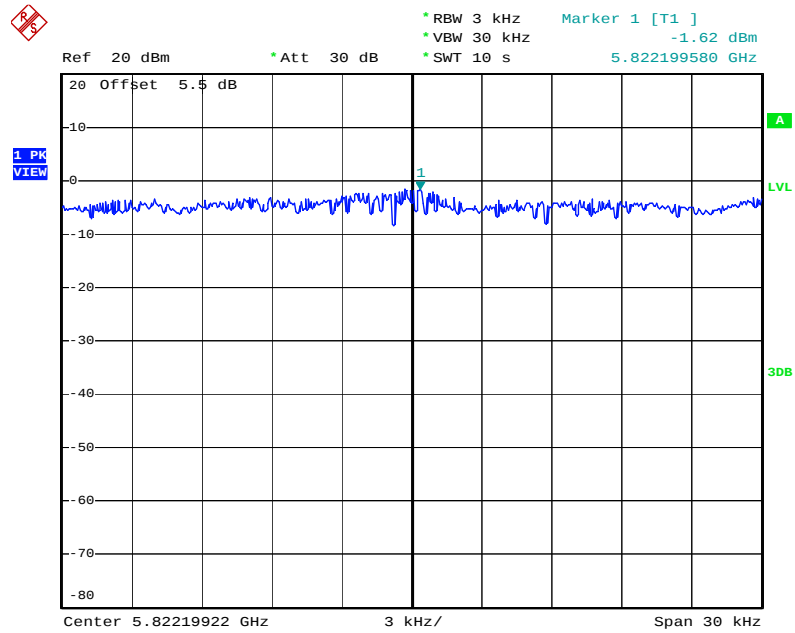

Date: 27.MAY.2010 17:23:32


<For Antenna 3>:

Power Density Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5745 MHz

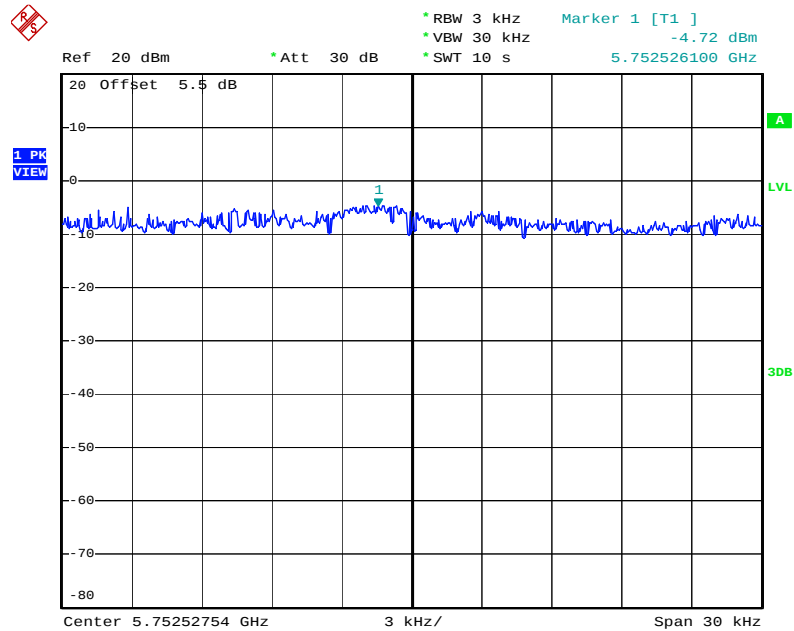


Date: 30.MAY.2010 18:52:51

Power Density Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5785 MHz

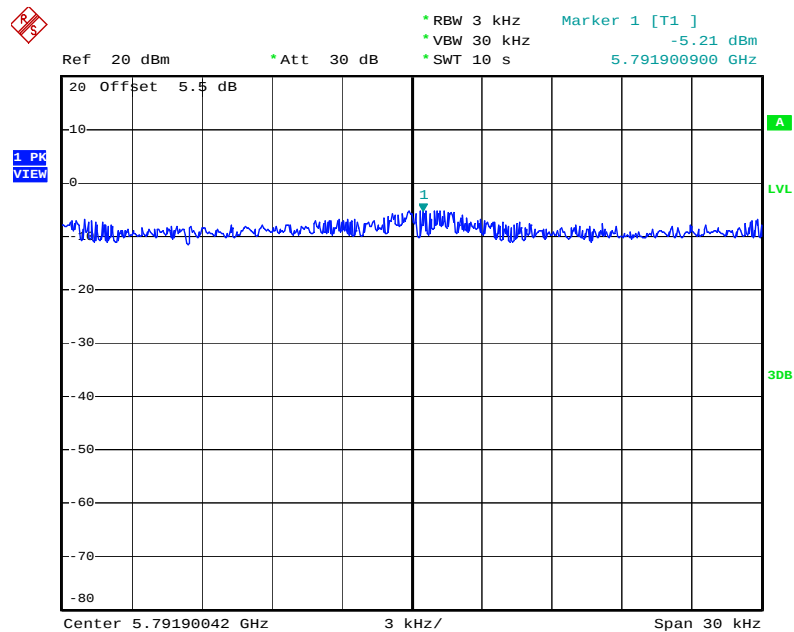

Date: 30.MAY.2010 18:54:58


Power Density Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5825 MHz

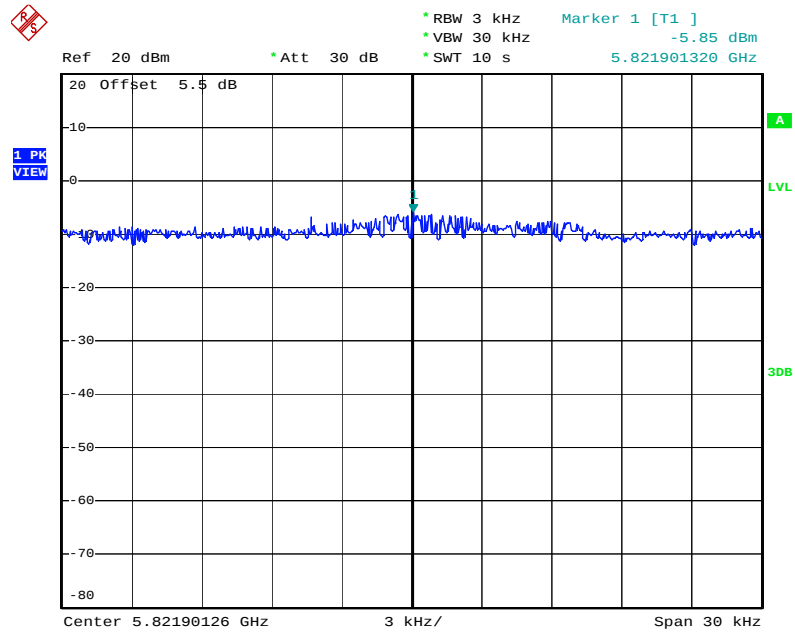

Date: 30.MAY.2010 18:57:00


<For Antenna 4>:

Power Density Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2412 MHz

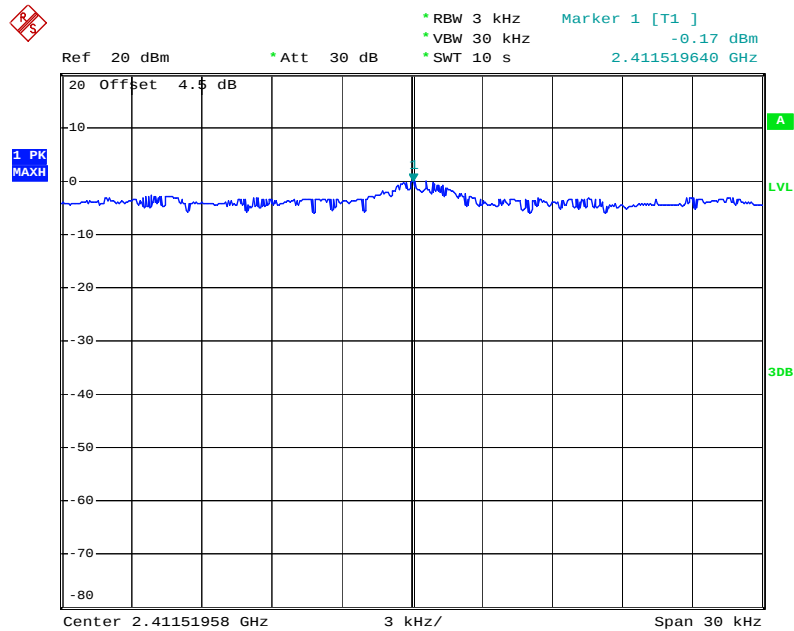


Date: 27.MAY.2010 16:47:41

Power Density Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2437 MHz

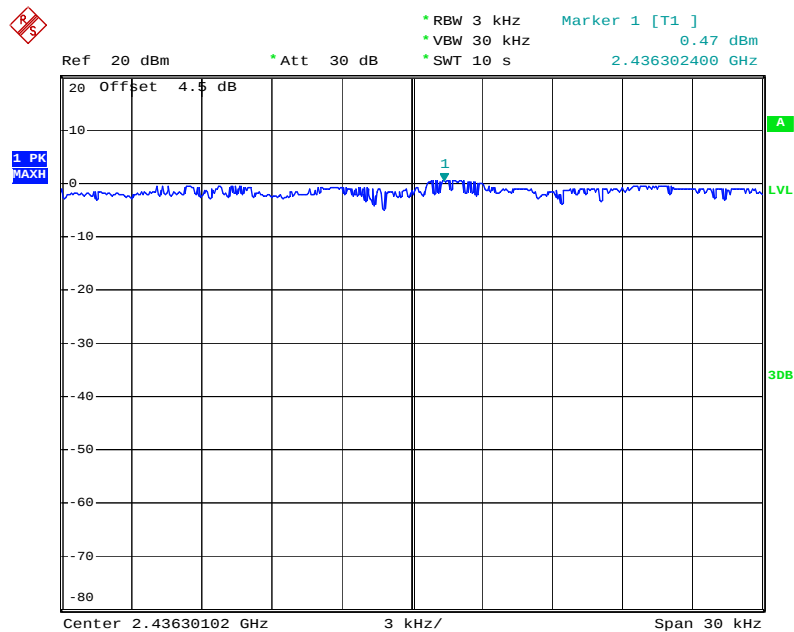


Date: 27.MAY.2010 16:44:32

Power Density Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2462 MHz

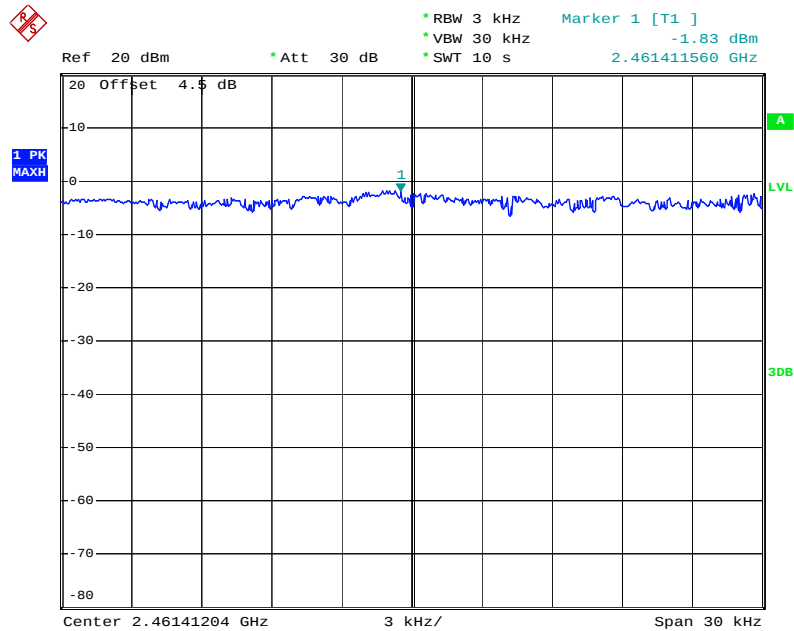


Date: 27.MAY.2010 16:41:25

Power Density Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2412 MHz

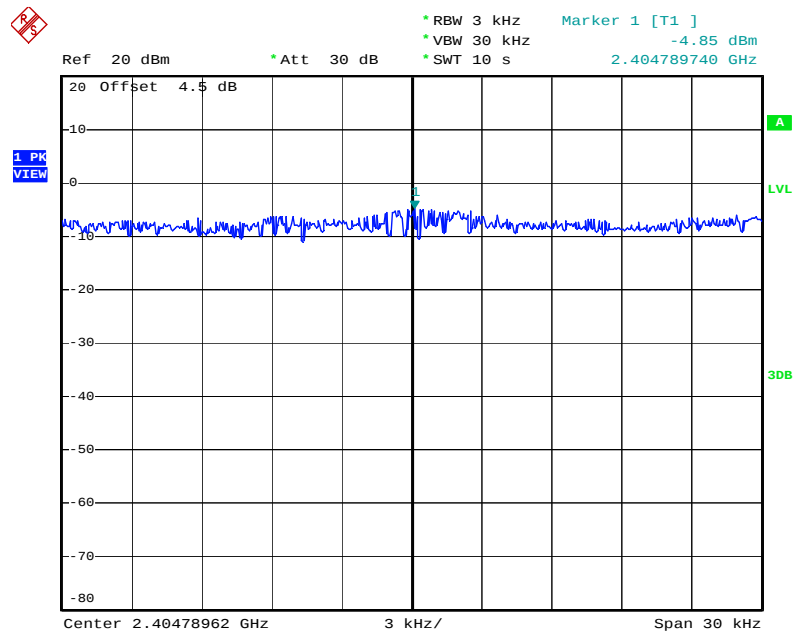


Date: 27.MAY.2010 16:33:14

Power Density Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2437 MHz

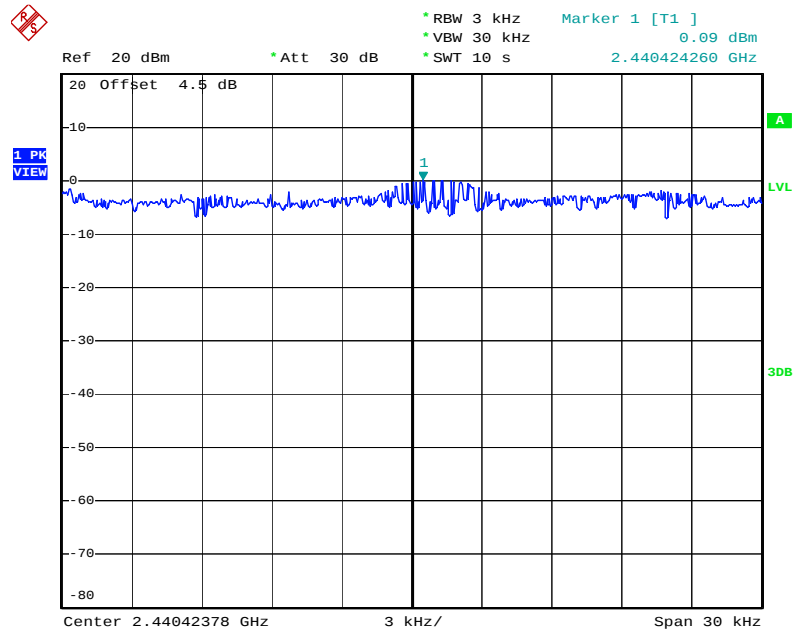


Date: 27.MAY.2010 16:35:24

Power Density Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2462 MHz

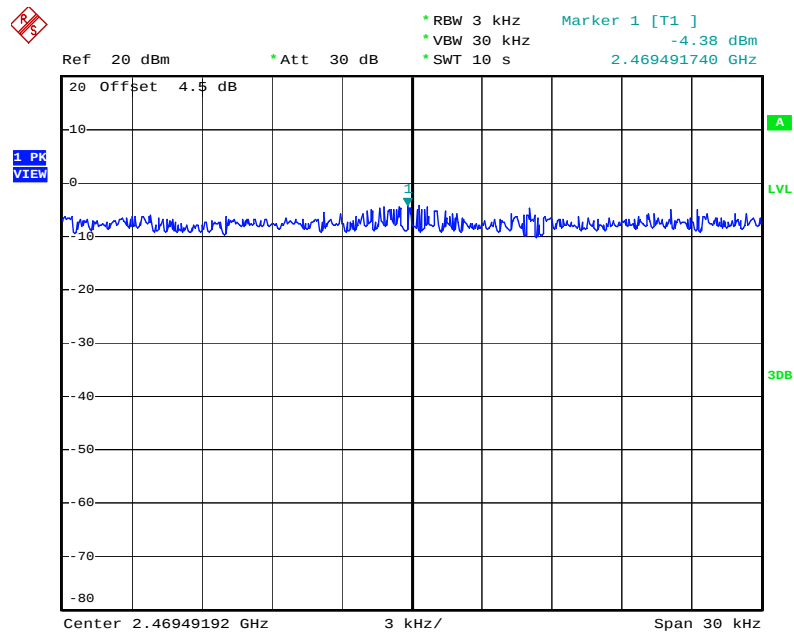


Date: 27.MAY.2010 16:37:25

Power Density Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5745 MHz

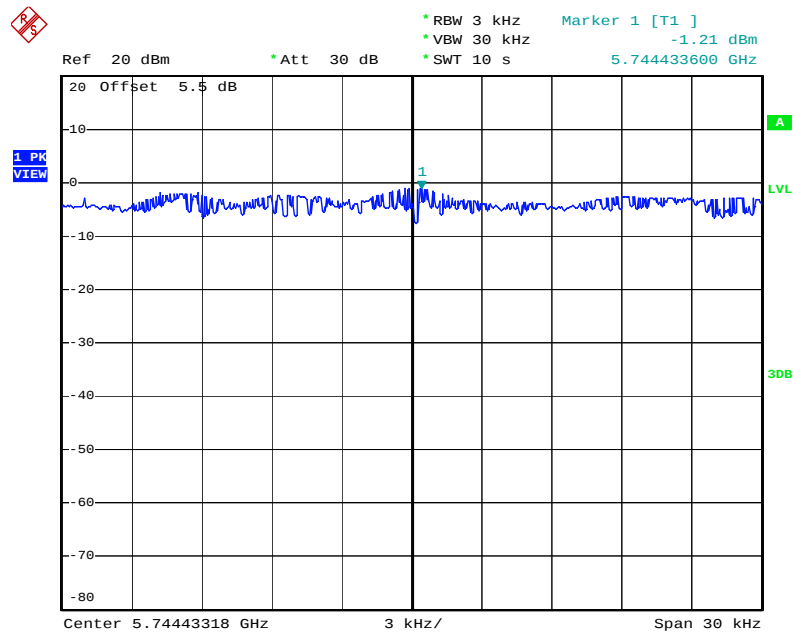


Date: 27.MAY.2010 17:17:38

Power Density Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5785 MHz

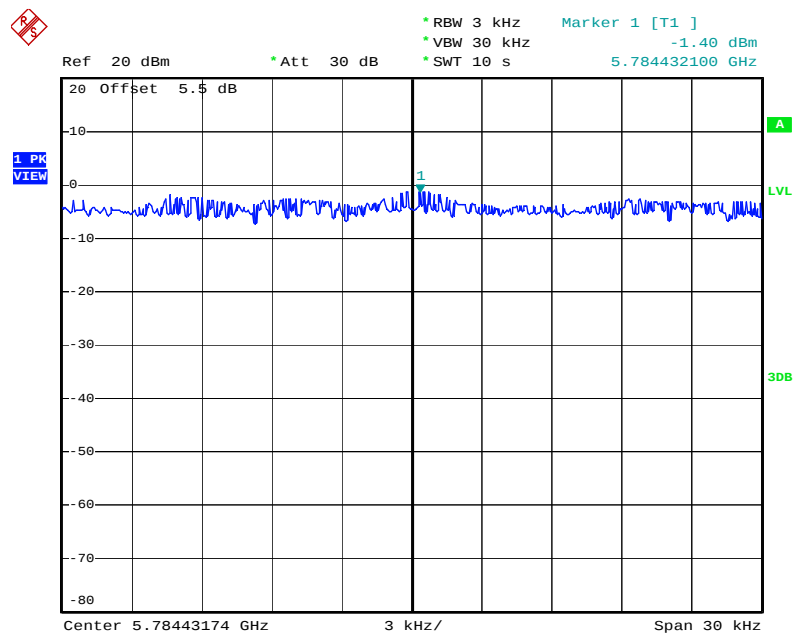

Date: 27.MAY.2010 17:19:48


Power Density Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5825 MHz

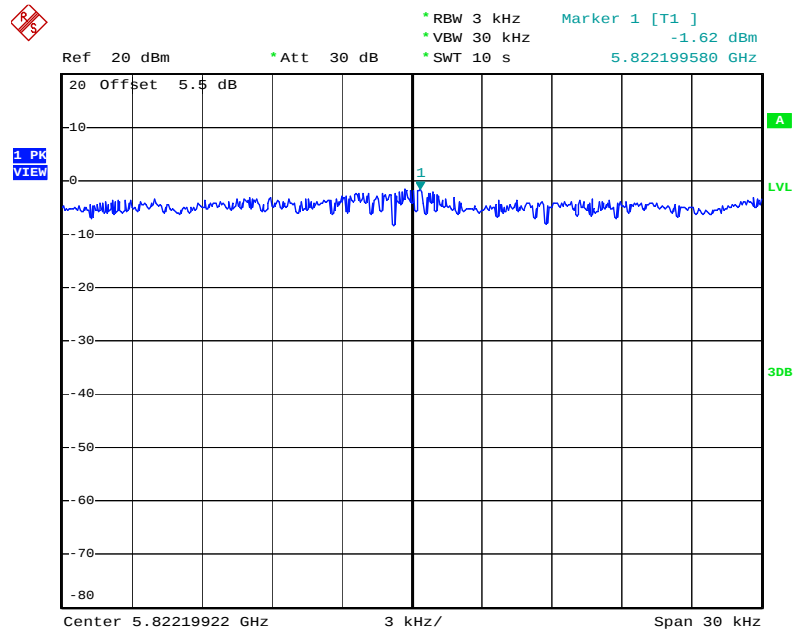

Date: 27.MAY.2010 17:23:32


<For Antenna 5>:

Power Density Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2412 MHz

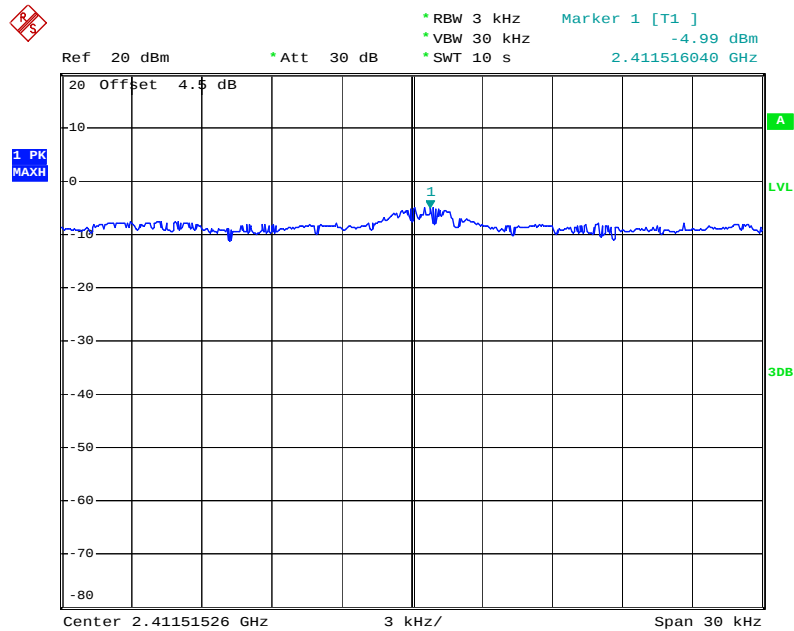


Date: 28.MAY.2010 11:36:12

Power Density Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2437 MHz

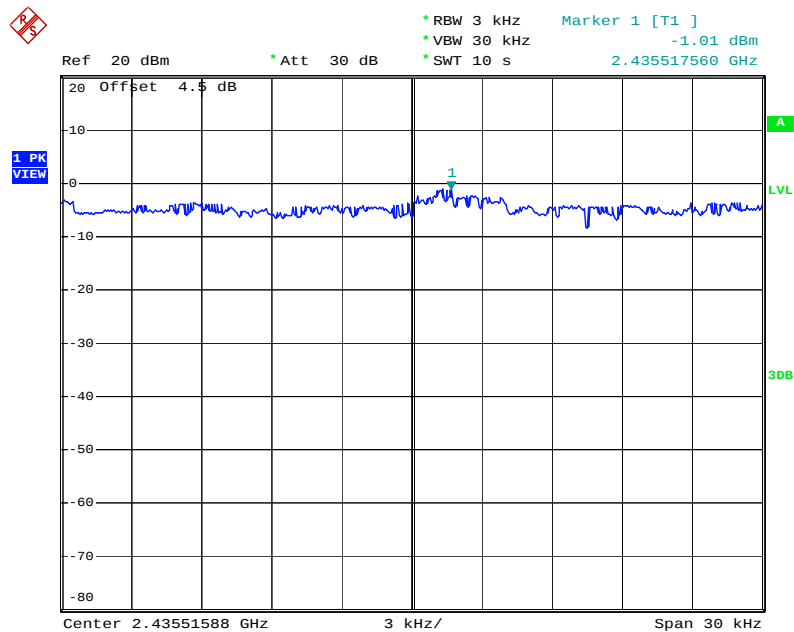


Date: 28.MAY.2010 11:43:34

Power Density Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2462 MHz

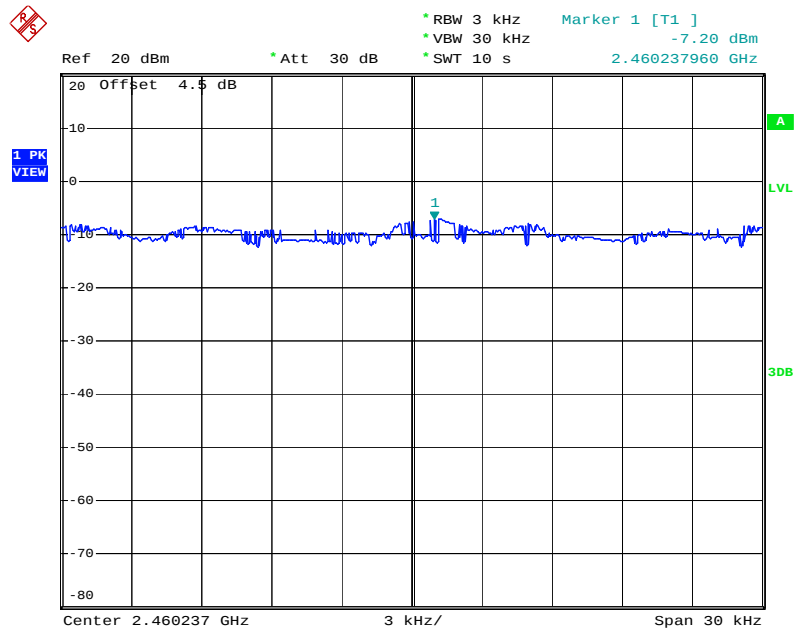


Date: 28.MAY.2010 11:39:51

Power Density Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2412 MHz

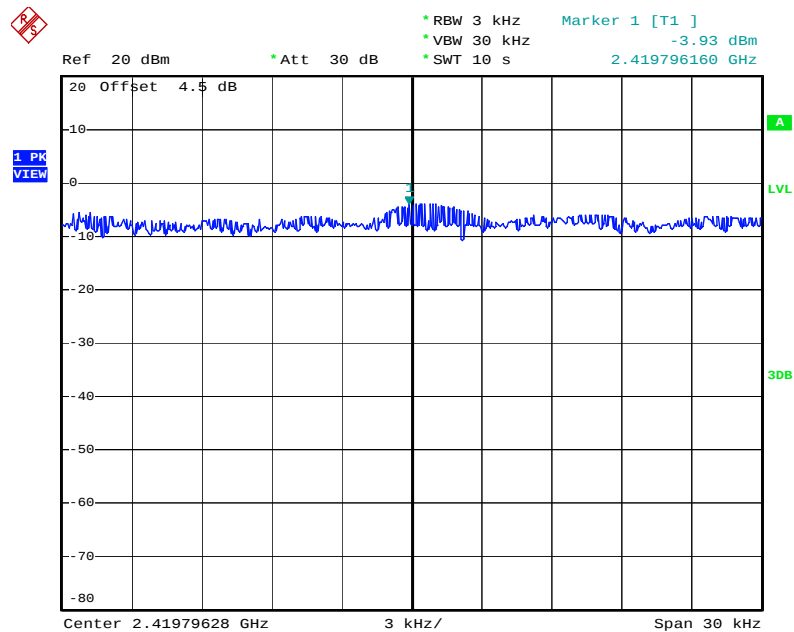


Date: 28.MAY.2010 11:28:19

Power Density Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2437 MHz

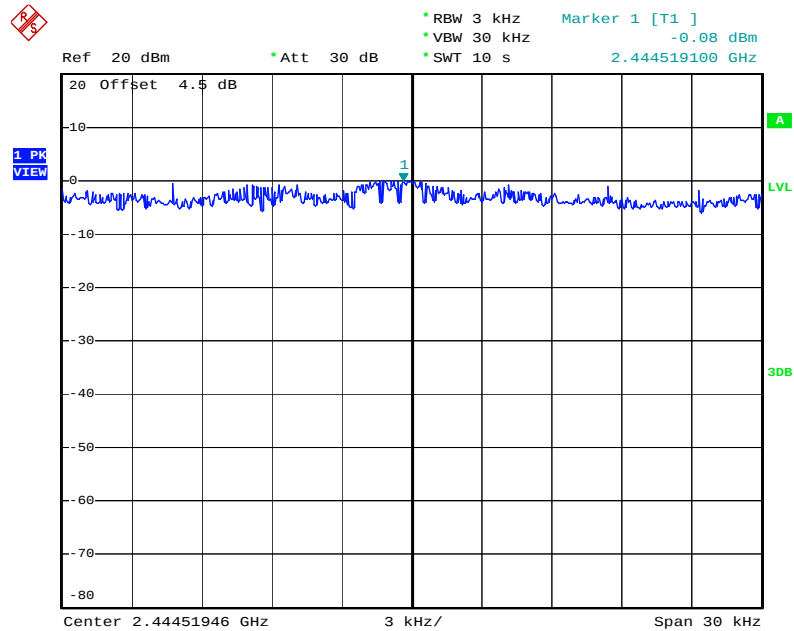

Date: 28.MAY.2010 11:26:16


Power Density Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2462 MHz

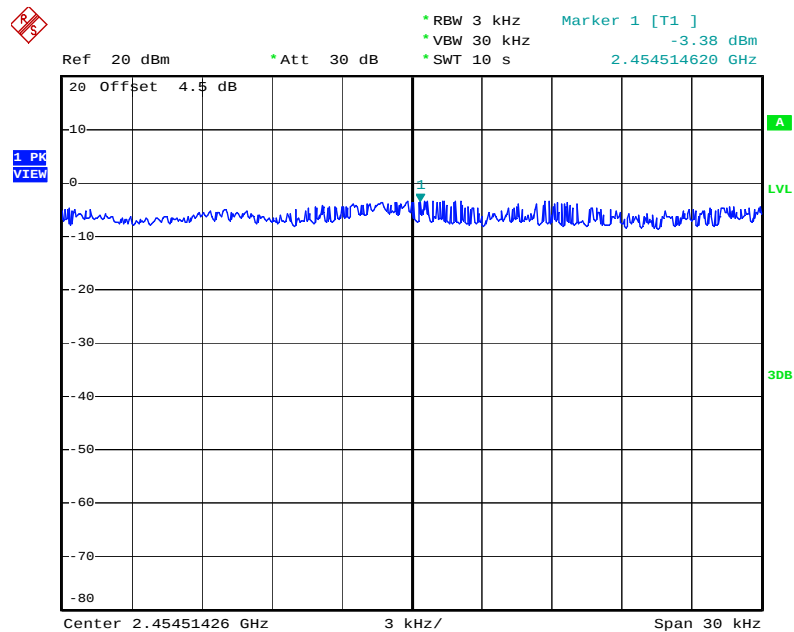

Date: 28.MAY.2010 11:23:51


<For Antenna 6>:

Power Density Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2412 MHz

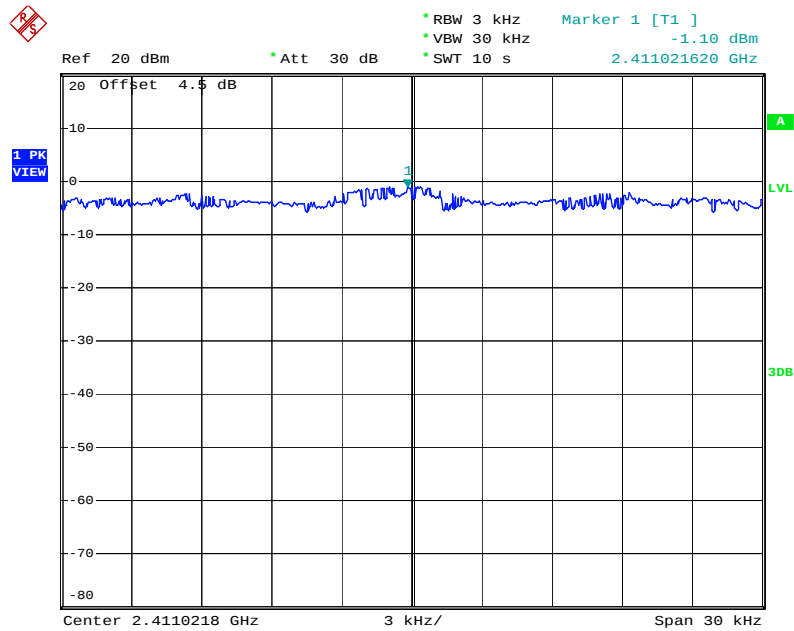


Date: 28.MAY.2010 12:15:17

Power Density Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2437 MHz

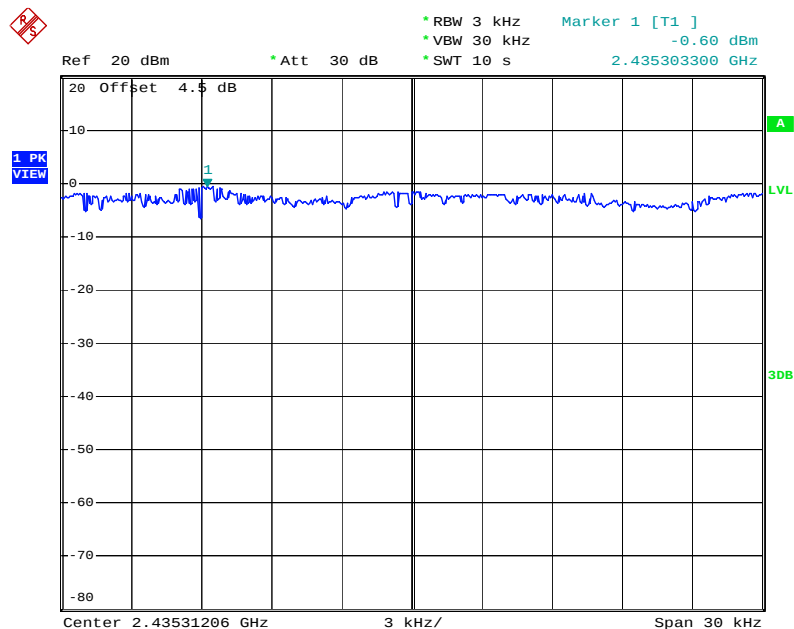


Date: 28.MAY.2010 12:18:03

Power Density Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2462 MHz

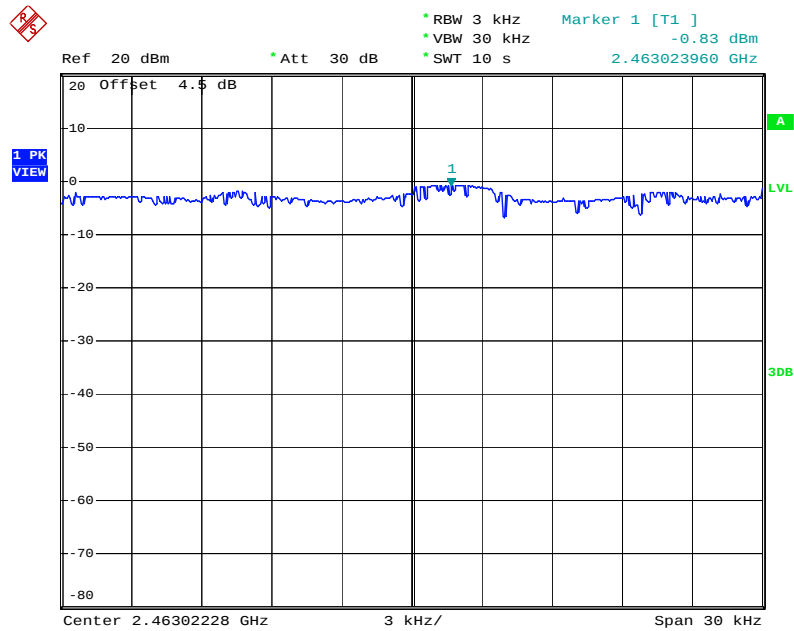


Date: 28.MAY.2010 12:21:12

Power Density Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2412 MHz

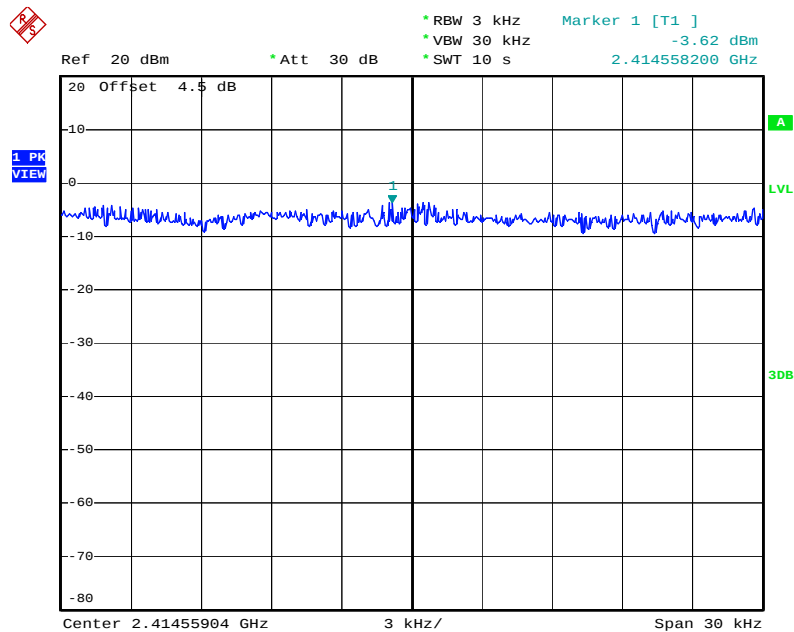


Date: 28.MAY.2010 12:04:02

Power Density Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2437 MHz

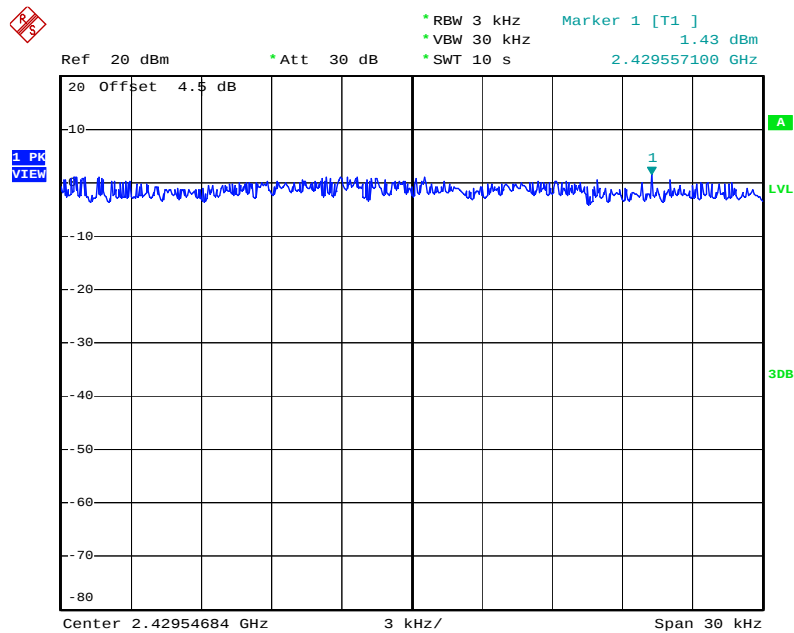

Date: 28.MAY.2010 12:06:03


Power Density Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2462 MHz

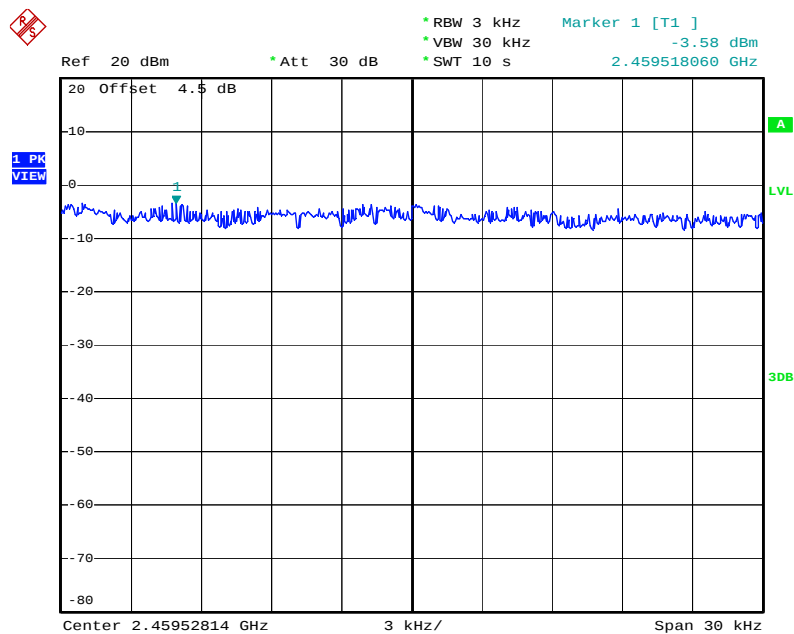

Date: 28.MAY.2010 12:09:01


<For Antenna 7>:

Power Density Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2412 MHz

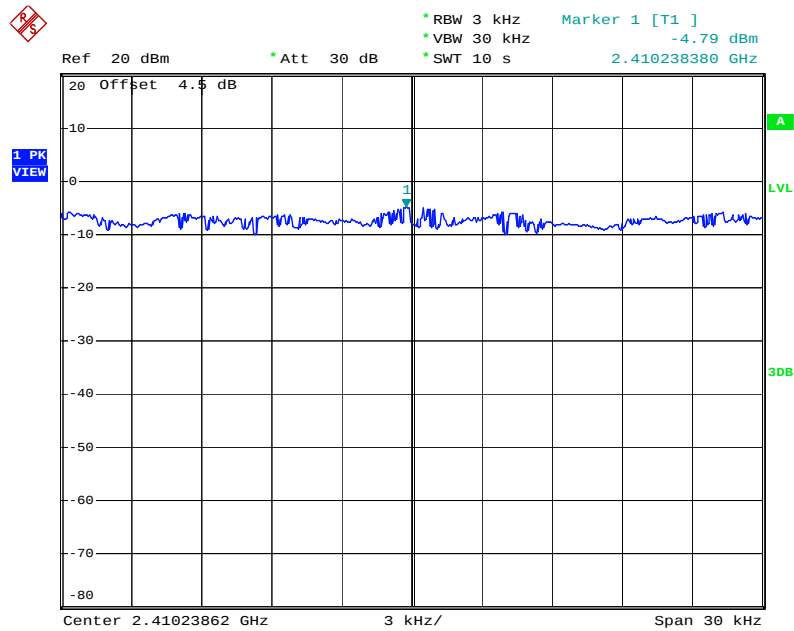


Date: 28.MAY.2010 12:40:43

Power Density Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2437 MHz

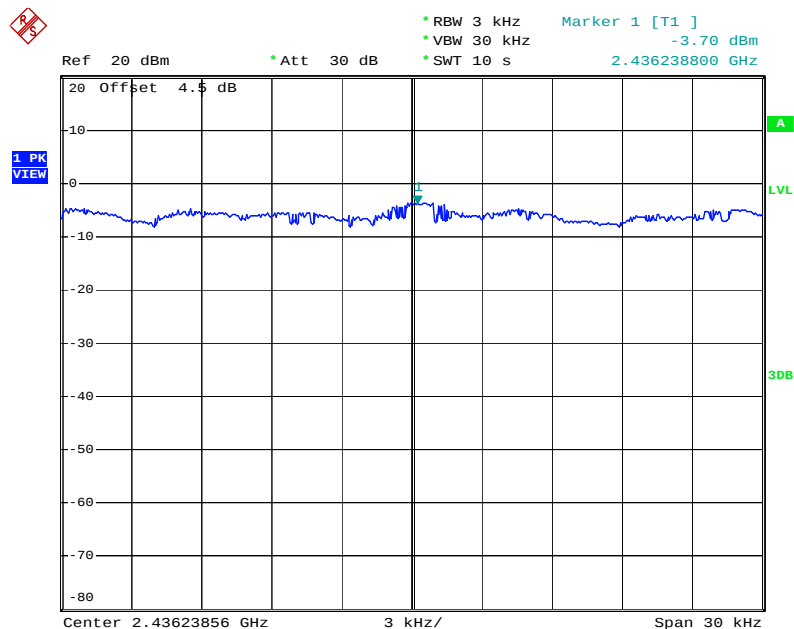


Date: 28.MAY.2010 12:45:09

Power Density Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2462 MHz

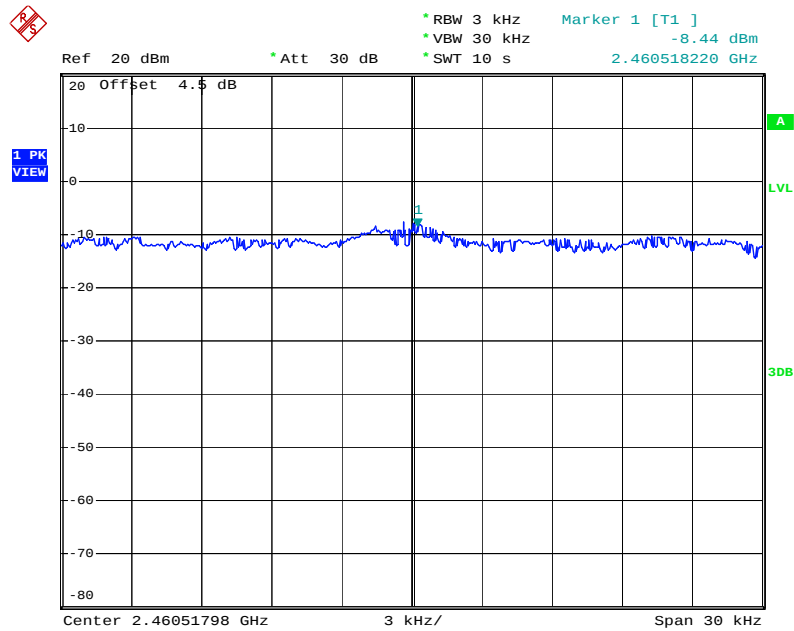


Date: 28.MAY.2010 12:34:19

Power Density Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2412 MHz

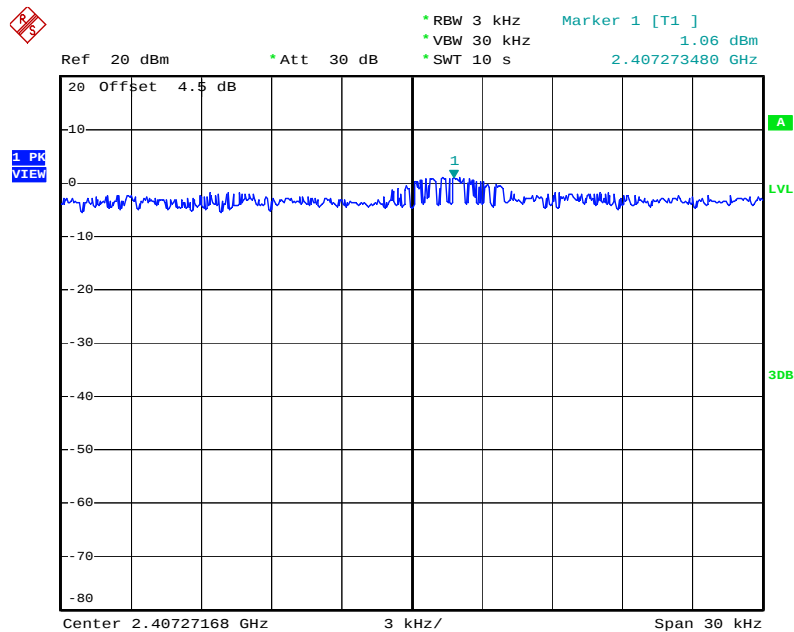


Date: 28.MAY.2010 12:48:45

Power Density Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2437 MHz

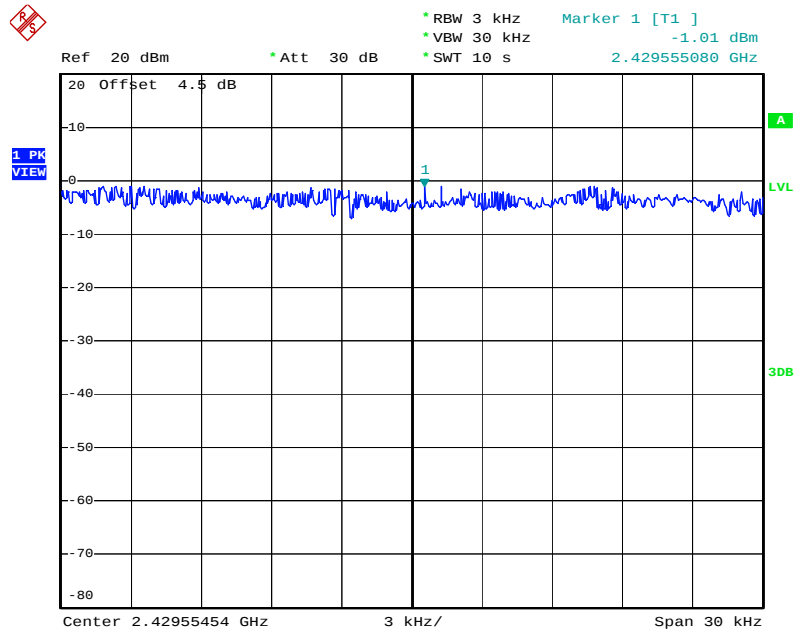

Date: 28.MAY.2010 12:50:50

Power Density Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2462 MHz

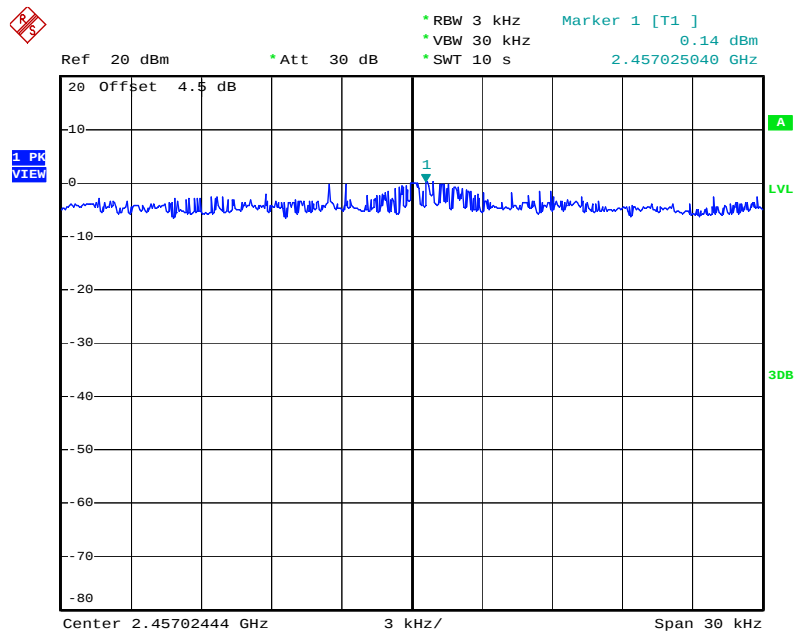

Date: 28.MAY.2010 12:52:40

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

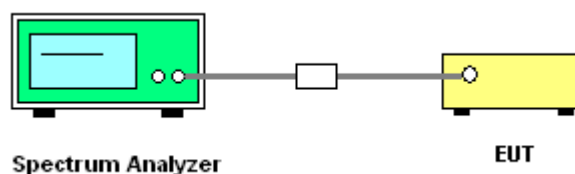

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Antenna 1>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 1

Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1 + Ant. 1-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.76	36.16	500	Complies
159	5795 MHz	35.60	36.32	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a / Antenna 1

Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.36	16.52	500	Complies
157	5785 MHz	16.40	16.52	500	Complies
165	5825 MHz	16.36	16.52	500	Complies

<For Antenna 2>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 2

Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 + Ant. 2-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.20	36.24	500	Complies
159	5795 MHz	35.76	36.24	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a / Antenna 2

Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.48	16.52	500	Complies
157	5785 MHz	16.36	16.52	500	Complies
165	5825 MHz	16.36	16.52	500	Complies

<For Antenna 3>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 3

Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1 + Ant. 3-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.20	36.16	500	Complies
159	5795 MHz	35.68	36.32	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a / Antenna 3

Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.36	16.52	500	Complies
157	5785 MHz	16.36	16.52	500	Complies
165	5825 MHz	16.36	16.56	500	Complies

<For Antenna 4>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 4

<For 2.4GHz Band>

Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	34.08	36.24	500	Complies
6	2437 MHz	35.20	36.24	500	Complies
9	2452 MHz	35.12	36.32	500	Complies

<For 5GHz Band>

Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 + Ant. 4-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.20	36.24	500	Complies
159	5795 MHz	35.76	36.24	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a/b/g / Antenna 4

<For 2.4GHz Band>

Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.12	15.80	500	Complies
6	2437 MHz	10.00	15.84	500	Complies
11	2462 MHz	10.08	15.84	500	Complies

Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.36	16.52	500	Complies
11	2462 MHz	16.36	16.56	500	Complies

<For 5GHz Band>

Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.48	16.52	500	Complies
157	5785 MHz	16.36	16.52	500	Complies
165	5825 MHz	16.36	16.52	500	Complies

<For Antenna 5>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 5

Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.12	36.24	500	Complies
6	2437 MHz	35.76	36.24	500	Complies
9	2452 MHz	35.04	36.32	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 5

Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.08	15.88	500	Complies
6	2437 MHz	10.08	15.76	500	Complies
11	2462 MHz	10.08	15.80	500	Complies

Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.52	16.52	500	Complies
11	2462 MHz	16.52	16.52	500	Complies

<For Antenna 6>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 6

Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.76	36.24	500	Complies
6	2437 MHz	35.12	36.24	500	Complies
9	2452 MHz	35.44	36.24	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 6

Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.52	15.84	500	Complies
6	2437 MHz	10.00	15.80	500	Complies
11	2462 MHz	10.12	15.88	500	Complies

Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.36	16.56	500	Complies
11	2462 MHz	16.40	16.52	500	Complies

<For Antenna 7>:

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11n / Antenna 7

Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.28	36.24	500	Complies
6	2437 MHz	35.68	36.32	500	Complies
9	2452 MHz	35.28	36.24	500	Complies

Temperature	21°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11b/g / Antenna 7

Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.56	15.80	500	Complies
6	2437 MHz	10.04	15.72	500	Complies
11	2462 MHz	11.56	15.76	500	Complies

Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.36	16.52	500	Complies
11	2462 MHz	16.36	16.56	500	Complies


<For Antenna 1>:

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1 + Ant. 1-2 / 5755MHz

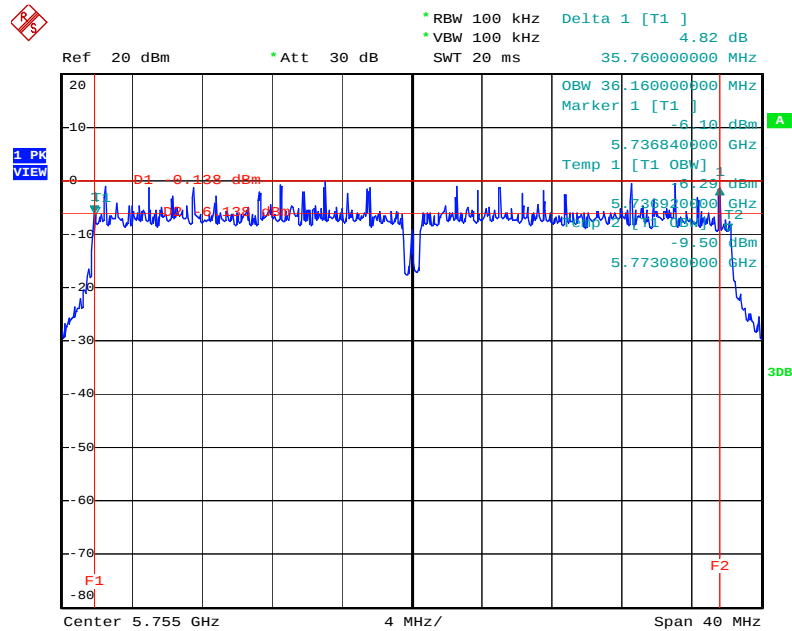


Date: 30.MAY.2010 12:09:15

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 1-1 + Ant. 1-2 / 5795 MHz

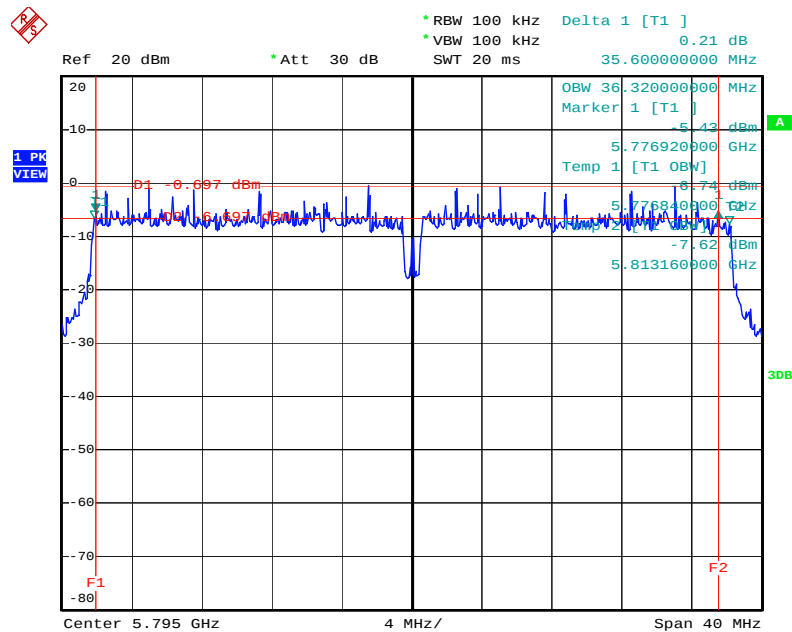


Date: 30.MAY.2010 12:11:34

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5745 MHz

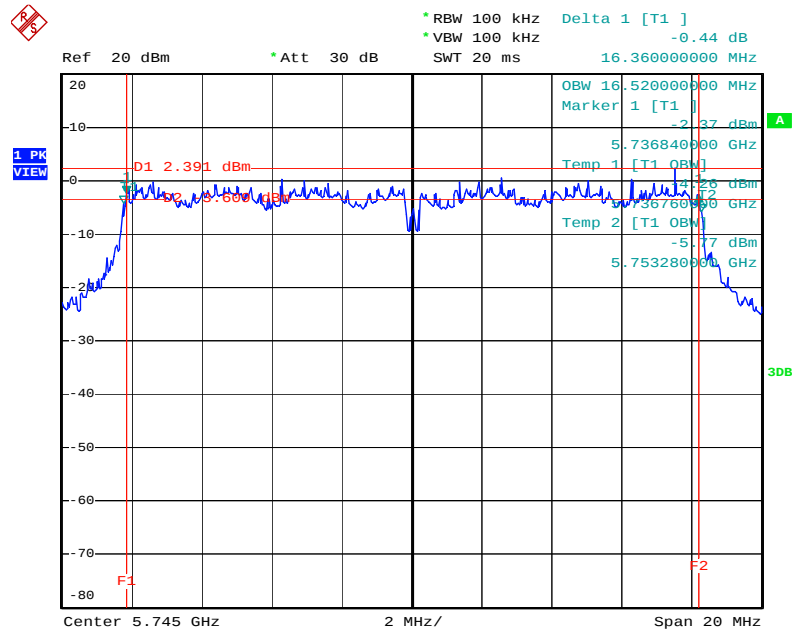


Date: 30.MAY.2010 12:04:24

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5785 MHz

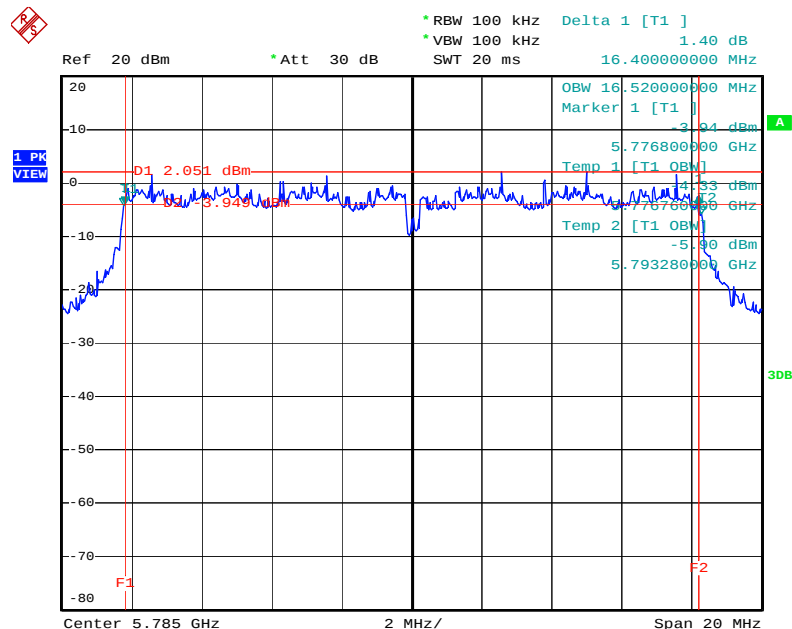

Date: 30.MAY.2010 11:58:11


6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1-1 + Ant. 1-2 / 5825 MHz

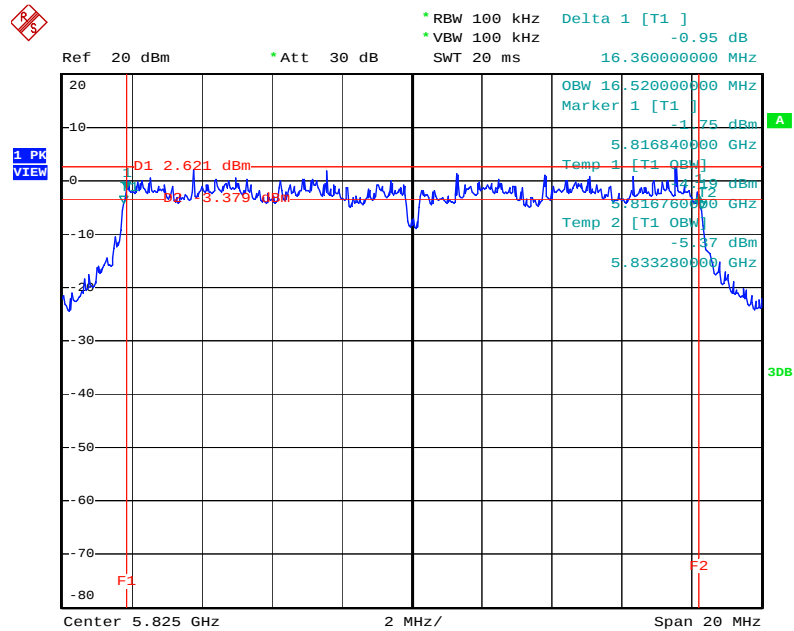

Date: 30.MAY.2010 11:55:57


<For Antenna 2>:

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 + Ant. 2-2 / 5755MHz

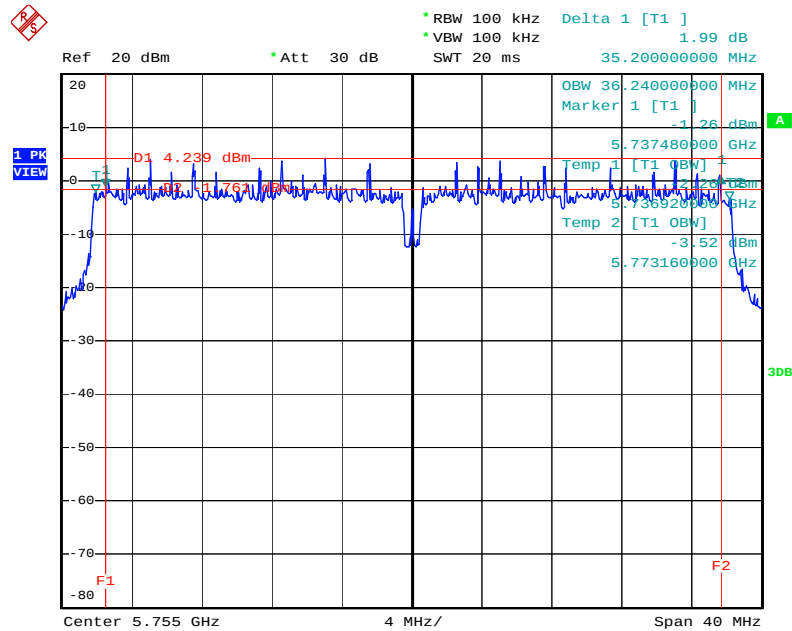


Date: 27.MAY.2010 17:31:45

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2-1 + Ant. 2-2 / 5795 MHz

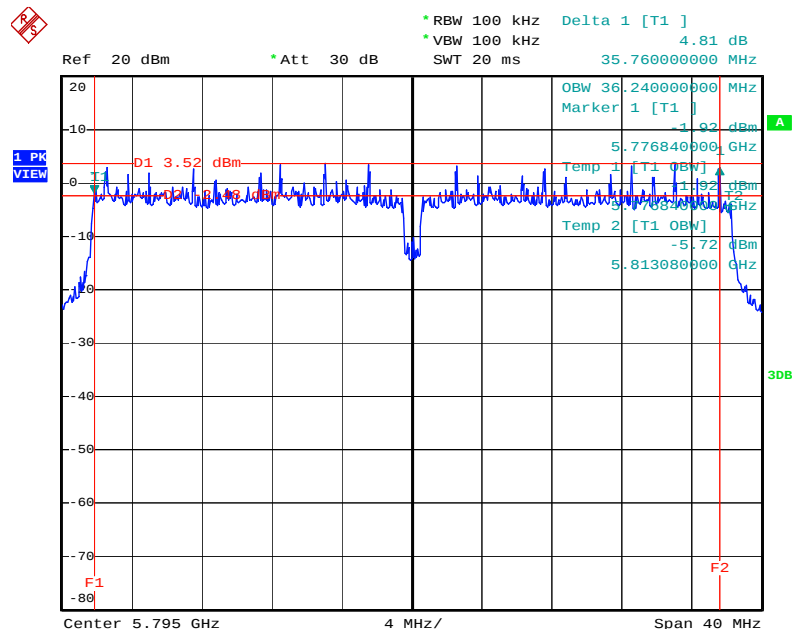


Date: 27.MAY.2010 17:34:00

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5745 MHz

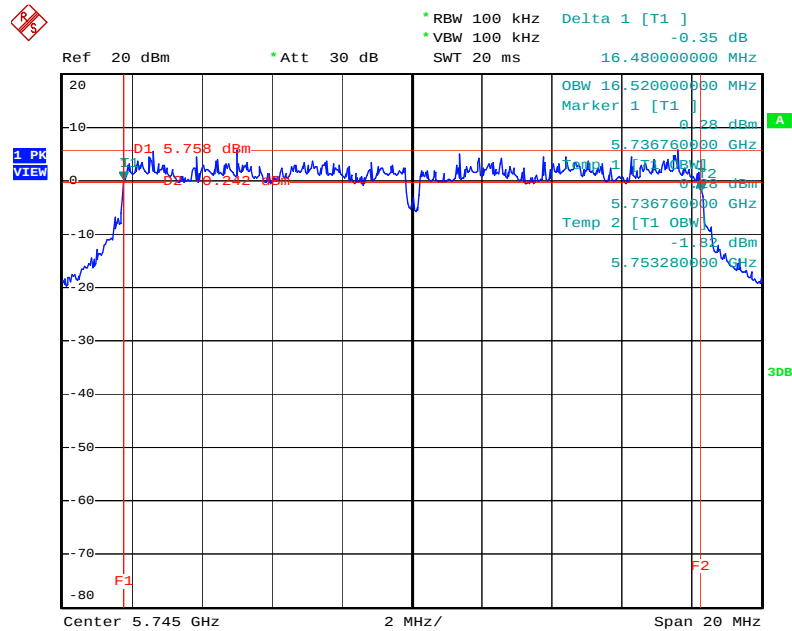


Date: 27.MAY.2010 17:16:09

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5785 MHz

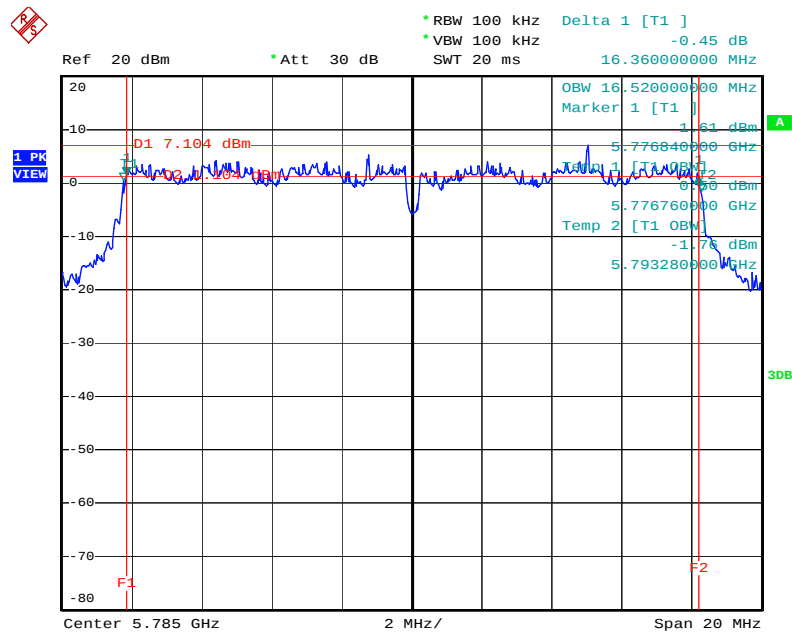

Date: 27.MAY.2010 17:18:19


6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 2-1 + Ant. 2-2 / 5825 MHz

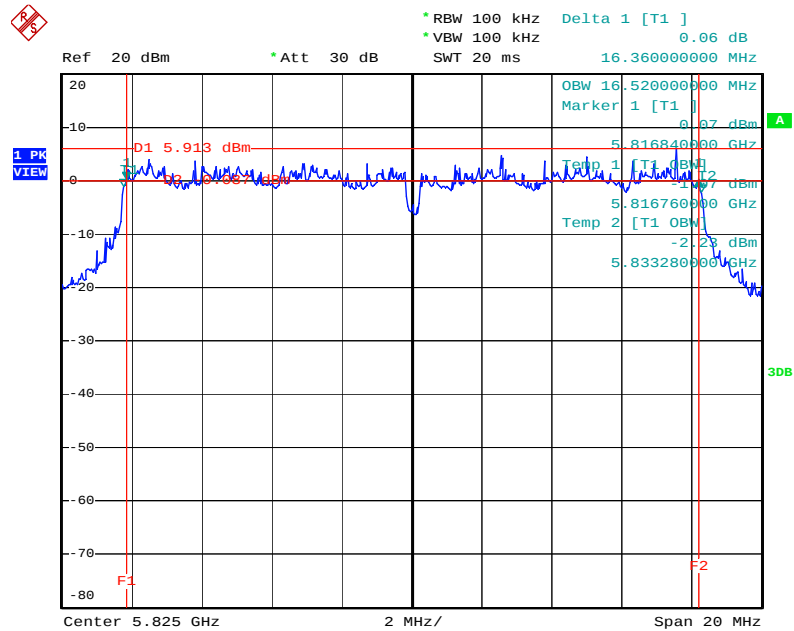

Date: 27.MAY.2010 17:22:03


<For Antenna 3>:

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1 + Ant. 3-2 / 5755MHz

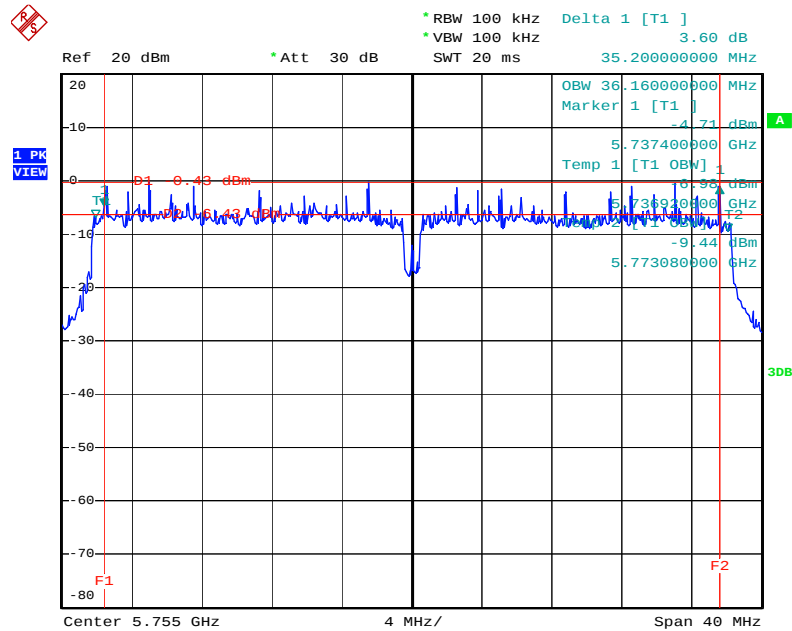


Date: 30.MAY.2010 19:00:02

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 3-1 + Ant. 3-2 / 5795 MHz

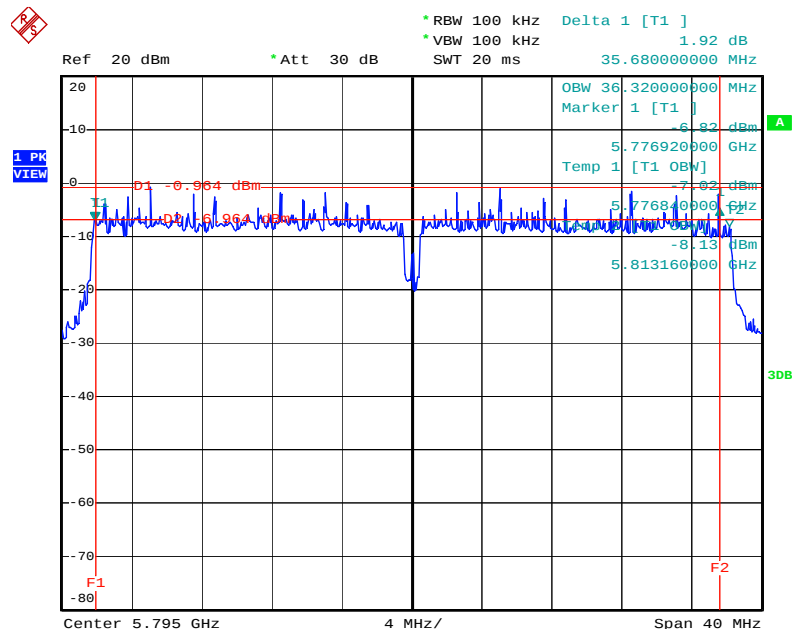


Date: 30.MAY.2010 18:57:56

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5745 MHz

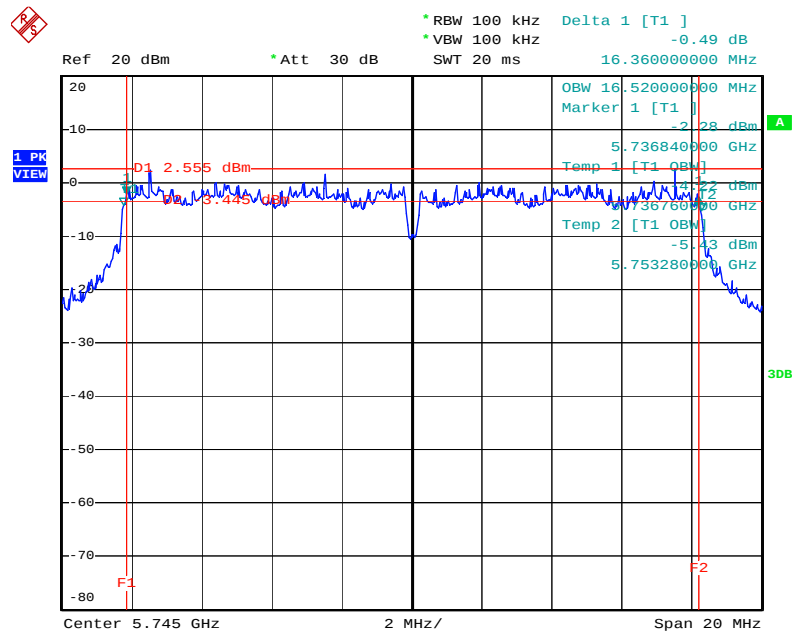


Date: 30.MAY.2010 18:51:21

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5785 MHz

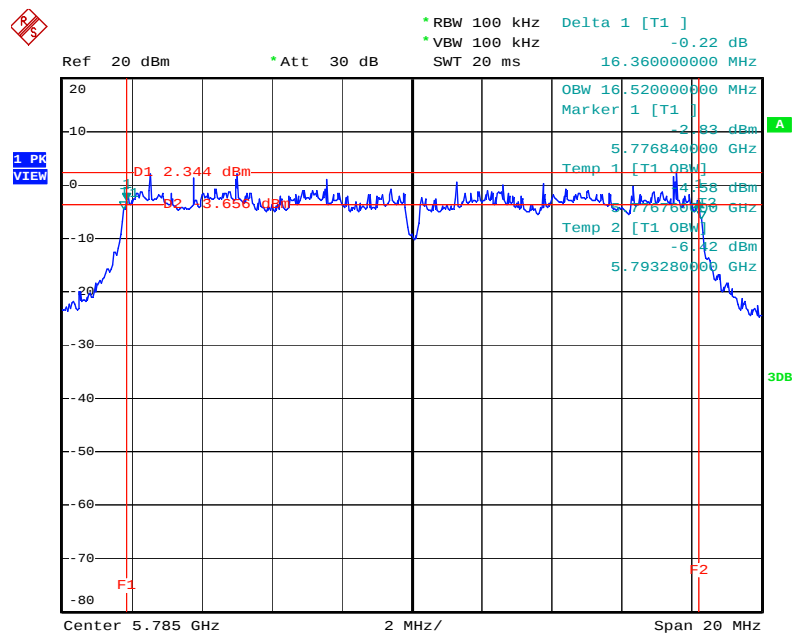

Date: 30.MAY.2010 18:53:29


6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3-1 + Ant. 3-2 / 5825 MHz

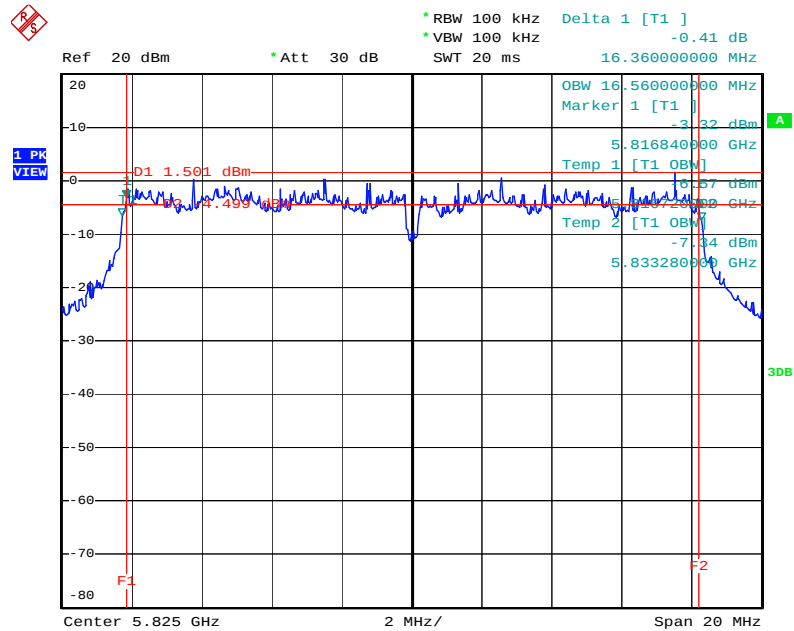

Date: 30.MAY.2010 18:55:30


<For Antenna 4>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1 + Ant. 4-2 / 2422 MHz

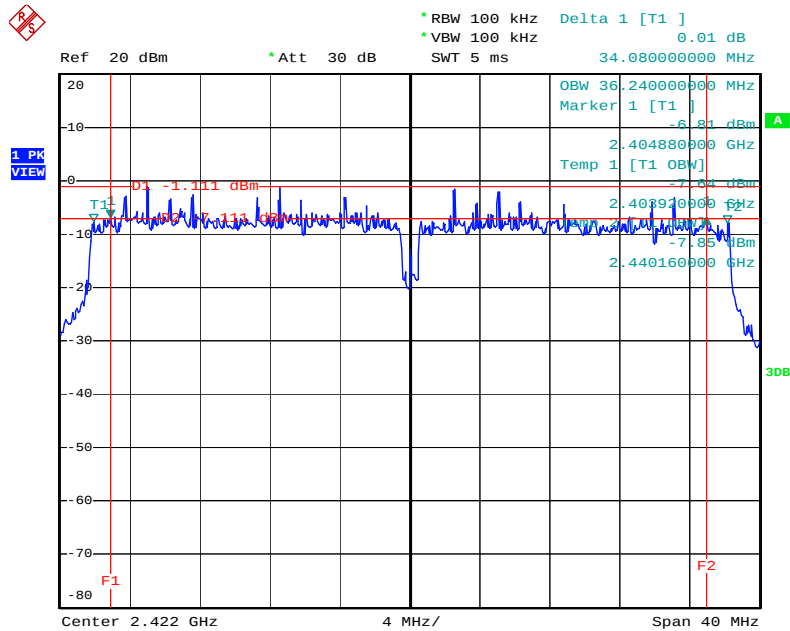

Date: 27.MAY.2010 16:28:05

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4-1 + Ant. 4-2 / 2437 MHz

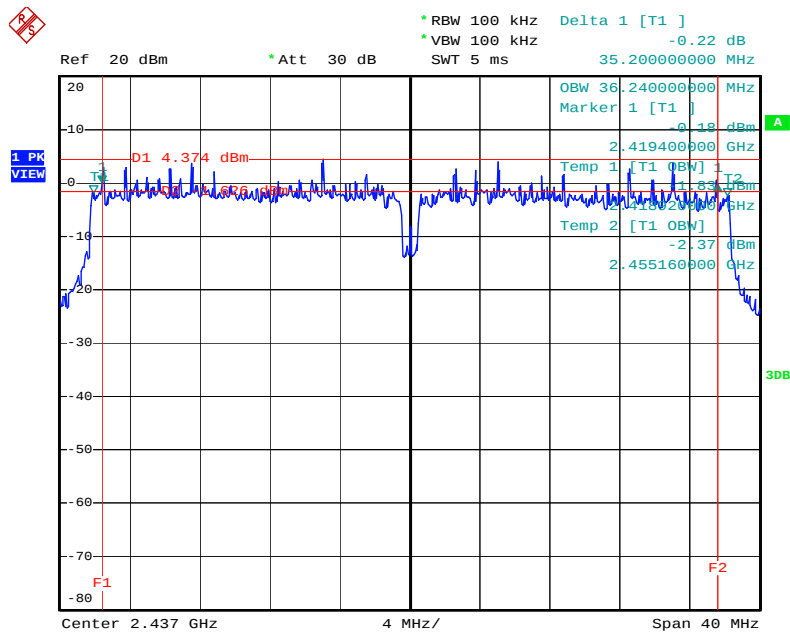

Date: 27.MAY.2010 16:25:59



Ref 20 dBm Att 30 dB SWT 5 ms Delta 1 [T1] -0.39 dB 35.12000000 MHz

OBW 36.32000000 MHz
Marker 1 [T1] -5.78 dBm
2.433840000 GHz
Temp 1 [T1 OBW] -5.78 dBm
2.433840000 GHz
-7.90 dBm
2.470160000 GHz

1 PK VIEW

Center 2.452 GHz 4 MHz/ Span 40 MHz

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 100 kHz SWT 20 ms Delta 1 [T1] 1.99 dB
 35.20000000 MHz


1 PK VIEW D1 4.239 dBm T1 1.64 dBm OBW 36.24000000 MHz Marker 1 [T1] -1.26 dBm Temp 1 [T1 OBW] 5.737480000 GHz Temp 2 [T1 OBW] 5.736920000 GHz -3.52 dBm 5.773160000 GHz

F1 F2

Center 5.755 GHz 4 MHz/ Span 40 MHz


Issued Date : Jul. 16, 2010

6 dB Bandwidth Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4-1 + Ant. 4-2 / 5795 MHz

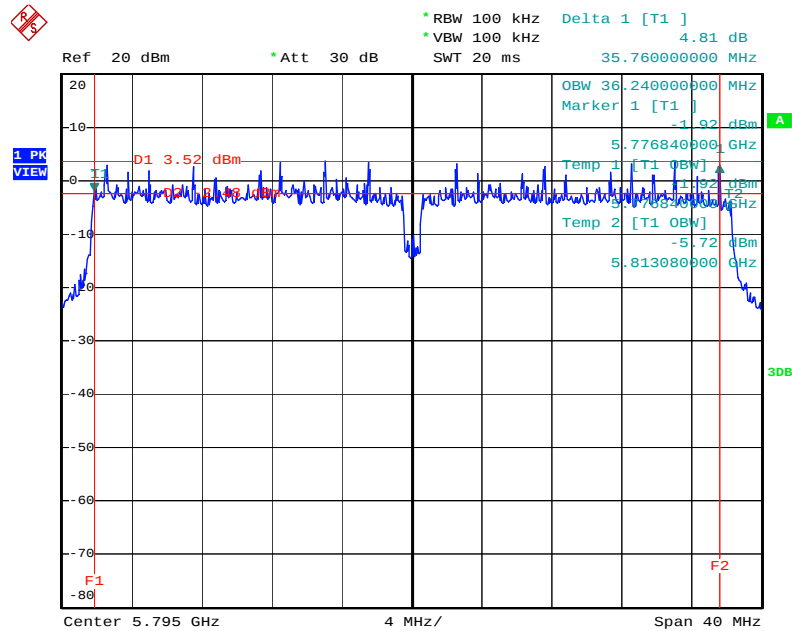


Date: 27.MAY.2010 17:34:00

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2412 MHz

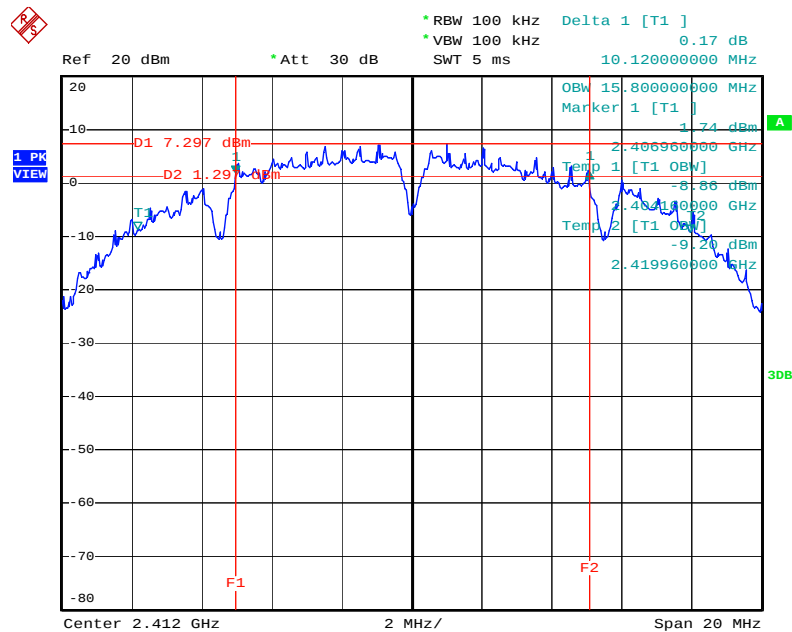


Date: 27.MAY.2010 15:59:20

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2437 MHz

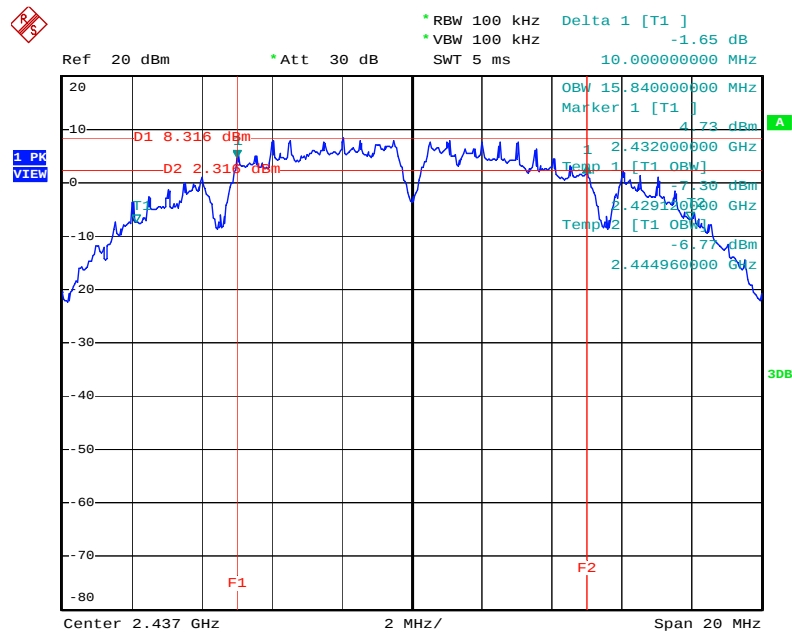


Date: 27.MAY.2010 15:56:49

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 4-1 + Ant. 4-2 / 2462 MHz

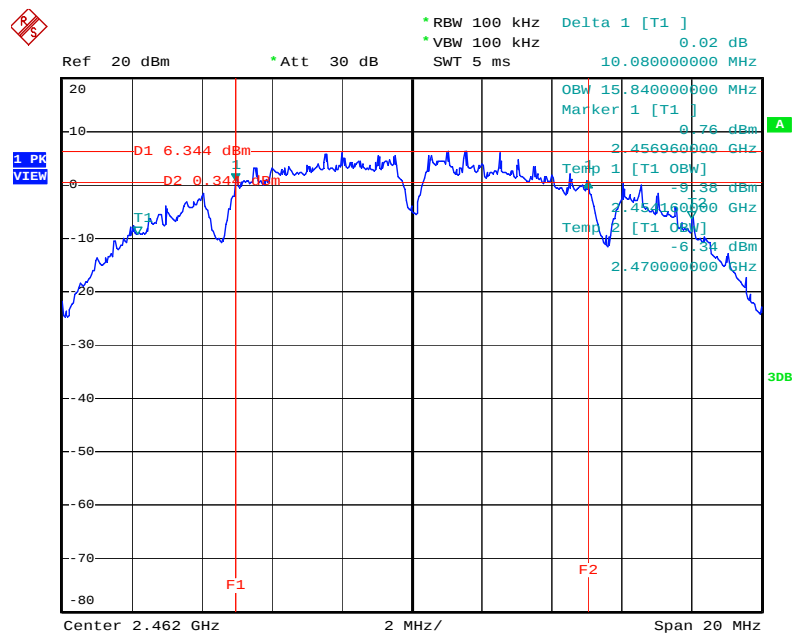


Date: 27.MAY.2010 15:54:40

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2412 MHz

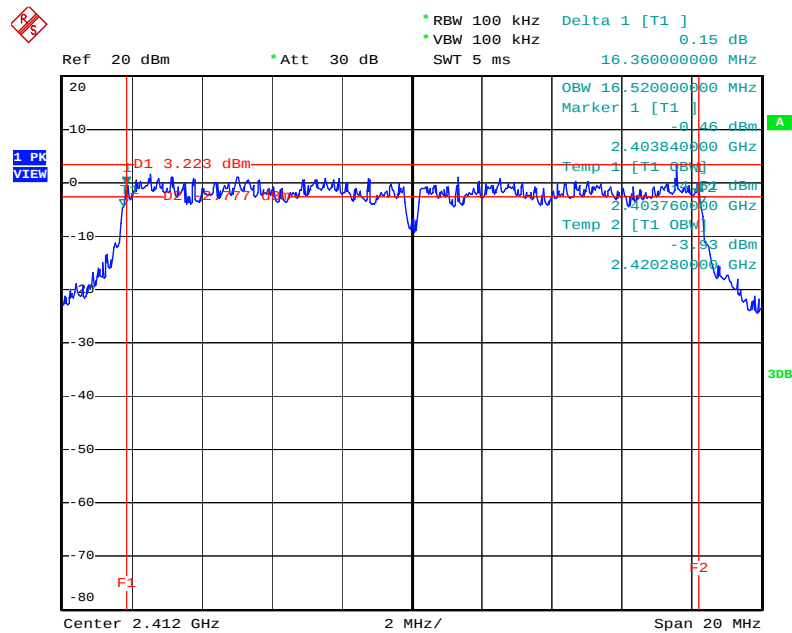


Date: 27.MAY.2010 16:31:45

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2437 MHz

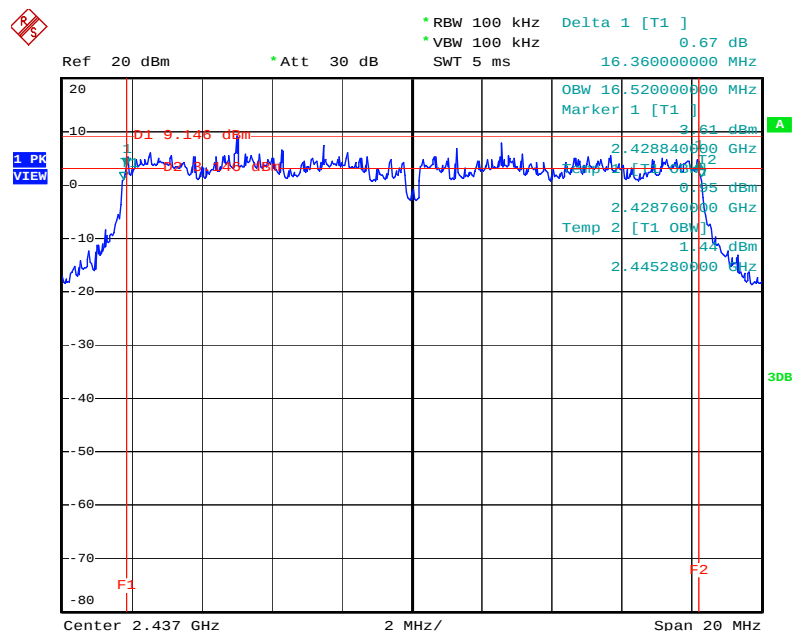


Date: 27.MAY.2010 16:33:53

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 4-1 + Ant. 4-2 / 2462 MHz

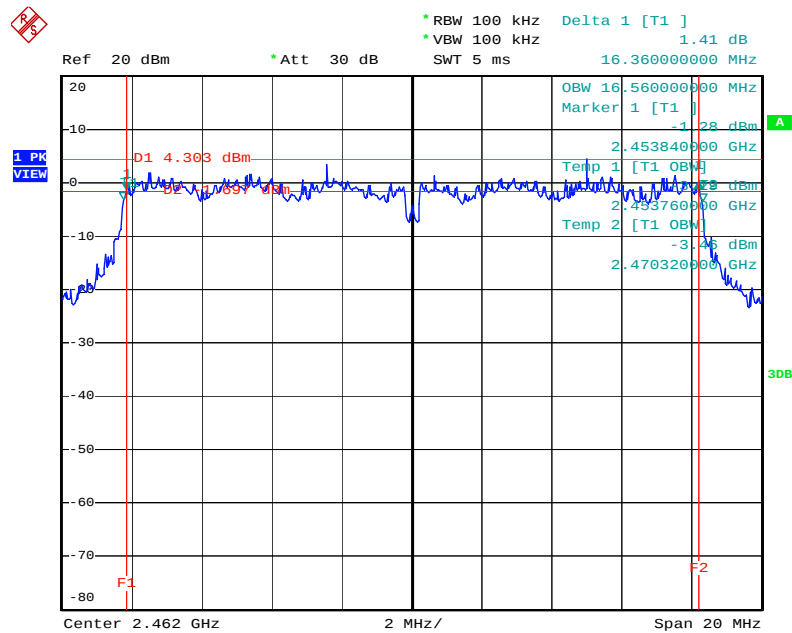


Date: 27.MAY.2010 16:35:56

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5745 MHz

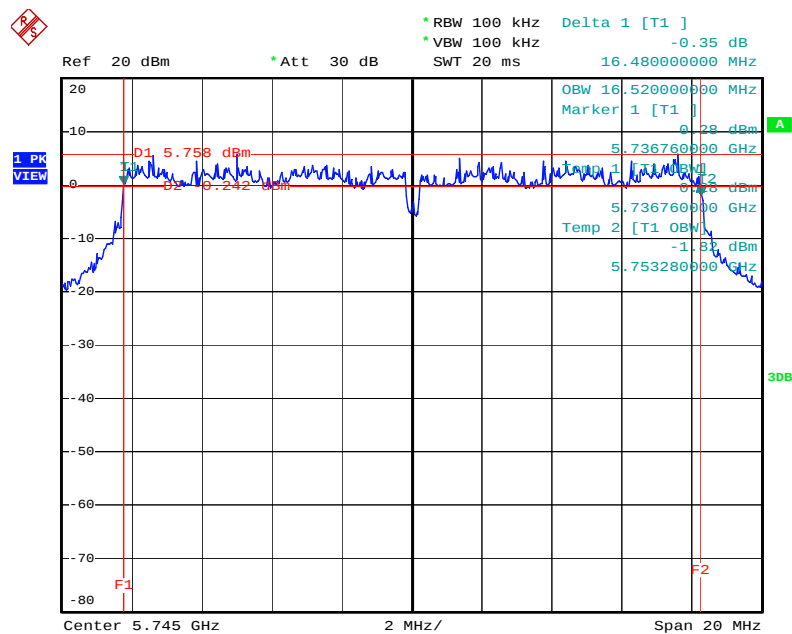


Date: 27.MAY.2010 17:16:09

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5785 MHz

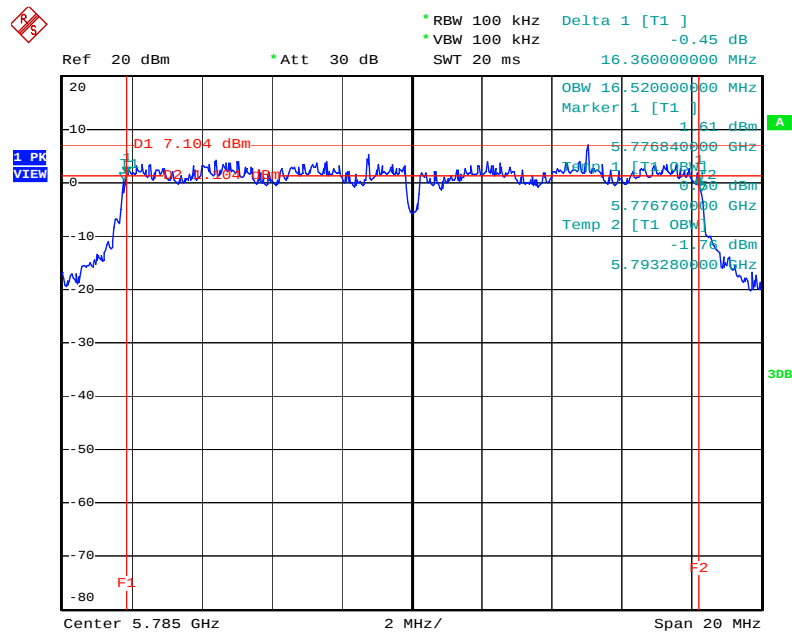

Date: 27.MAY.2010 17:18:19


6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 4-1 + Ant. 4-2 / 5825 MHz

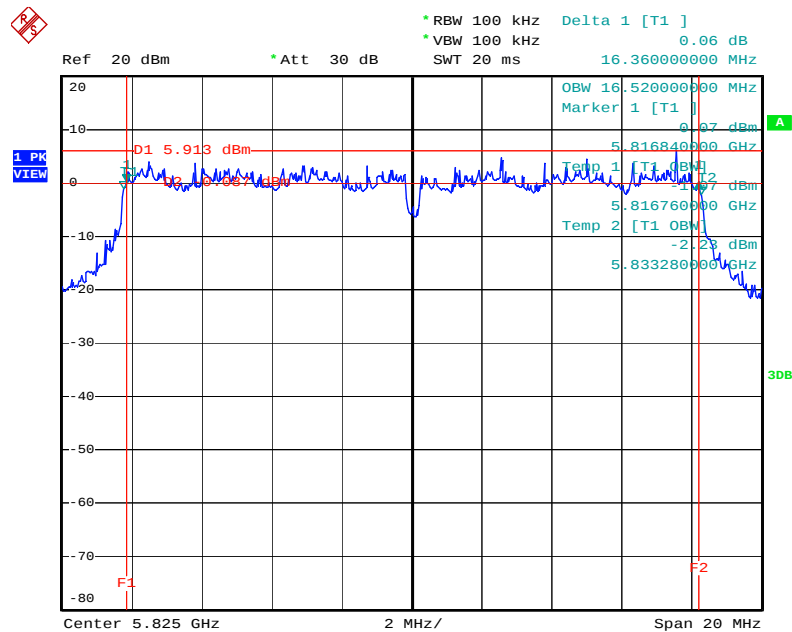

Date: 27.MAY.2010 17:22:03


<For Antenna 5>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2 / 2422 MHz

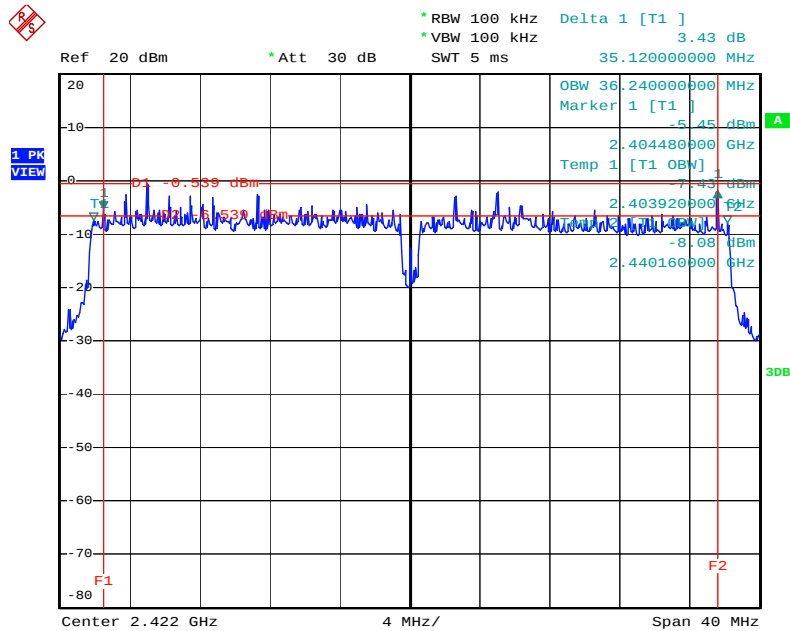


Date: 28.MAY.2010 11:44:47

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2 / 2437 MHz

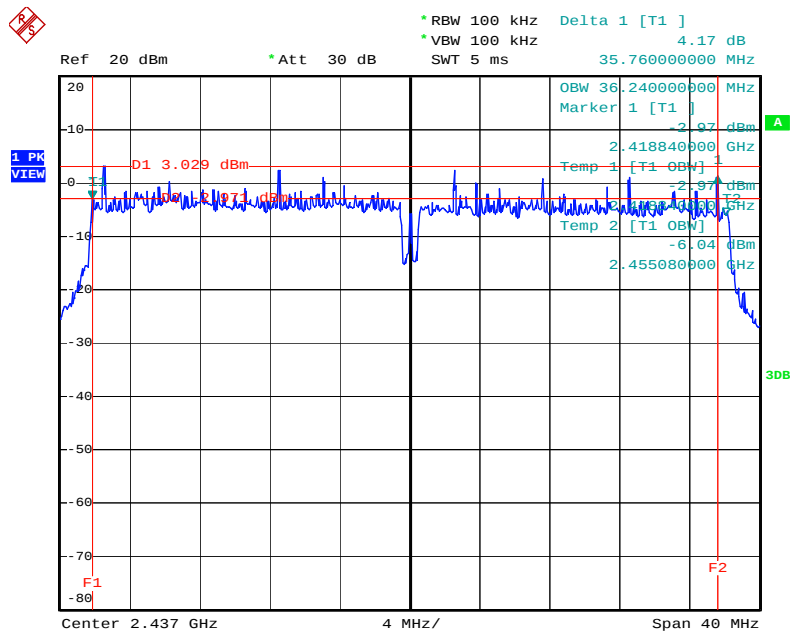


Date: 28.MAY.2010 11:46:54

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 5-1 + Ant. 5-2 / 2452 MHz

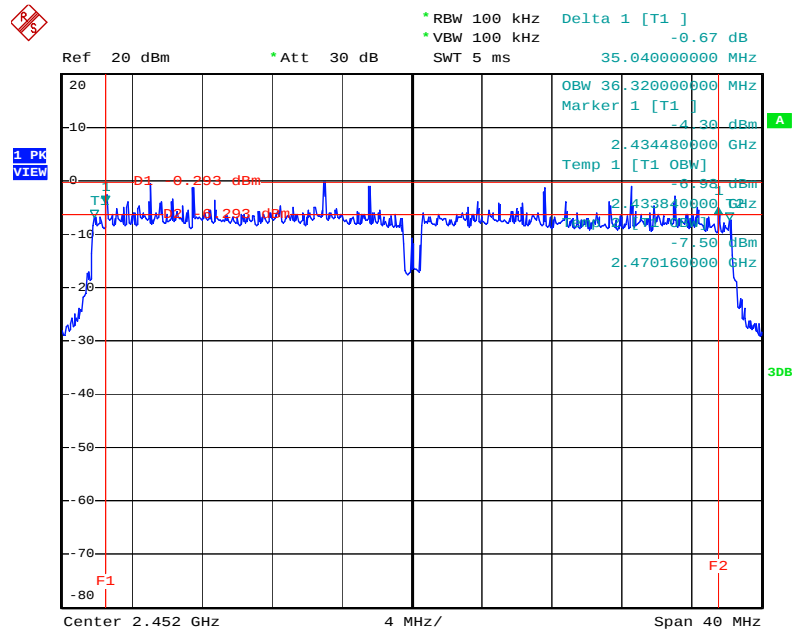


Date: 28.MAY.2010 11:49:18

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2412 MHz

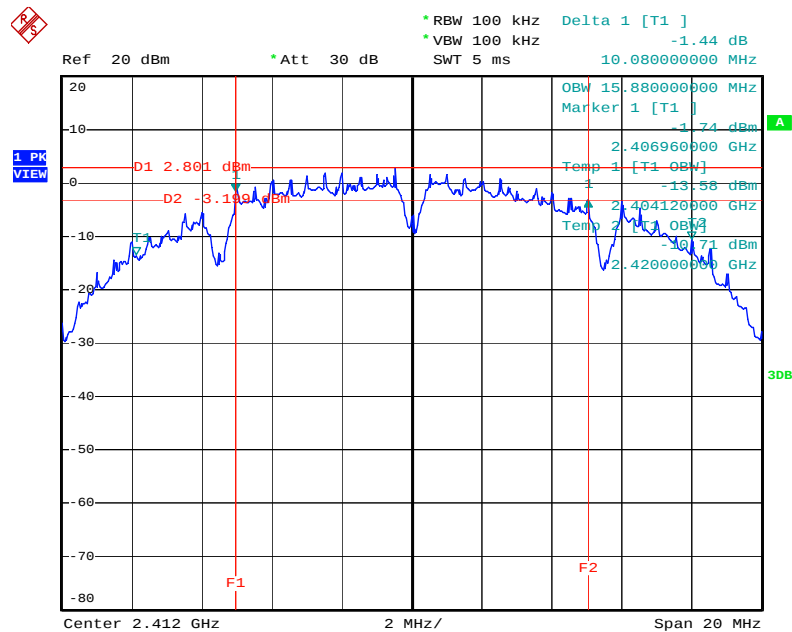


Date: 28.MAY.2010 11:31:34

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2437 MHz

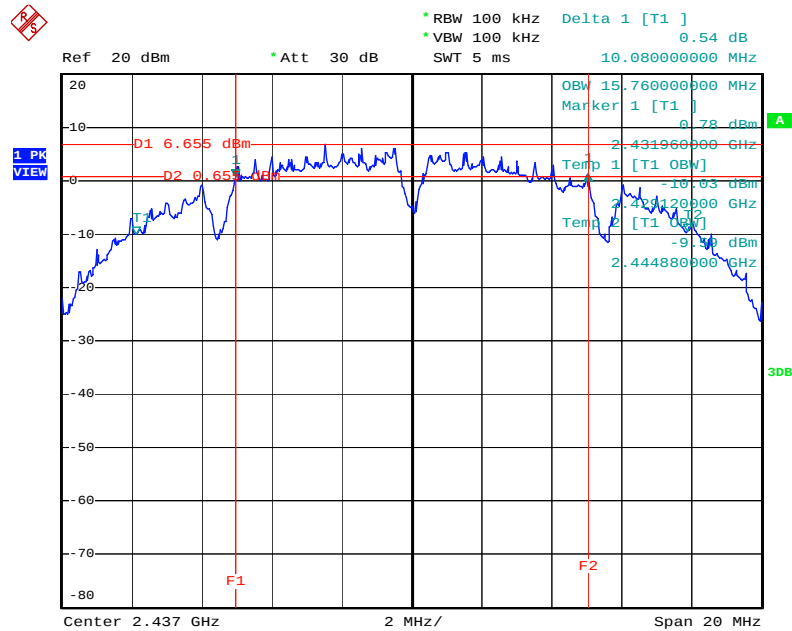


Date: 28.MAY.2010 11:29:58

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 5-1 + Ant. 5-2 / 2462 MHz

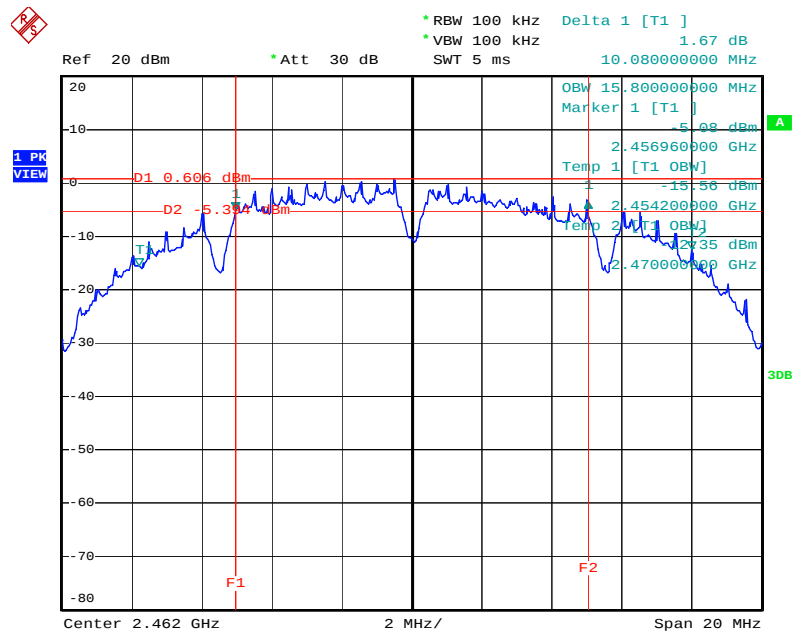


Date: 28.MAY.2010 11:30:37

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2412 MHz

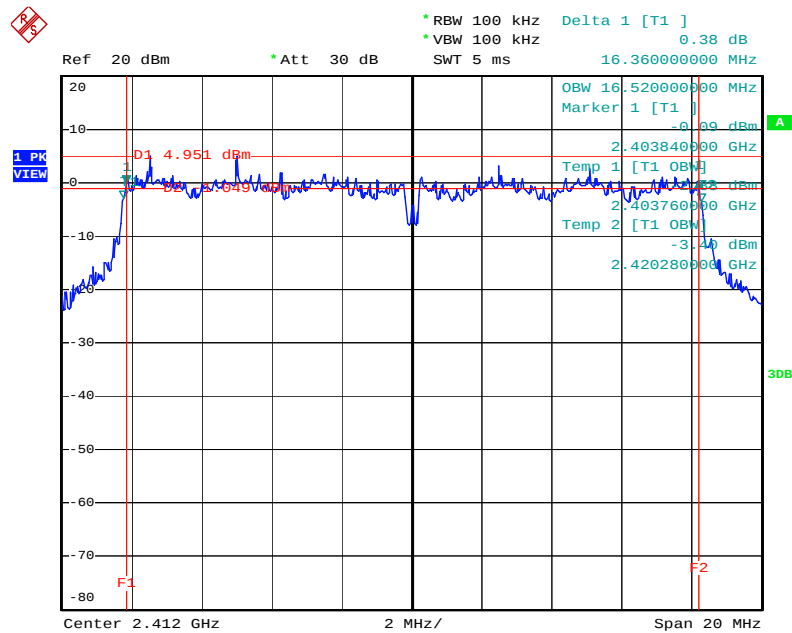


Date: 28.MAY.2010 11:26:49

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2437 MHz

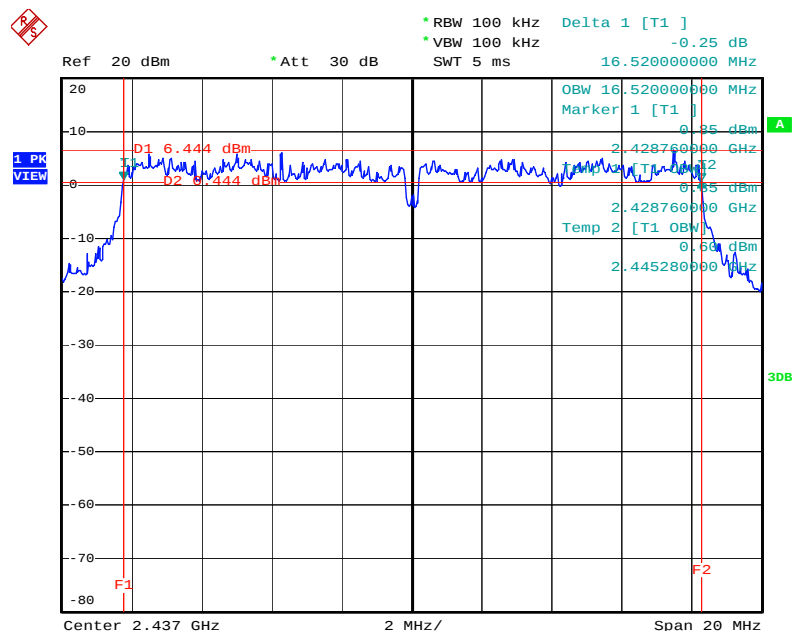

Date: 28.MAY.2010 11:24:46


6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 5-1 + Ant. 5-2 / 2462 MHz

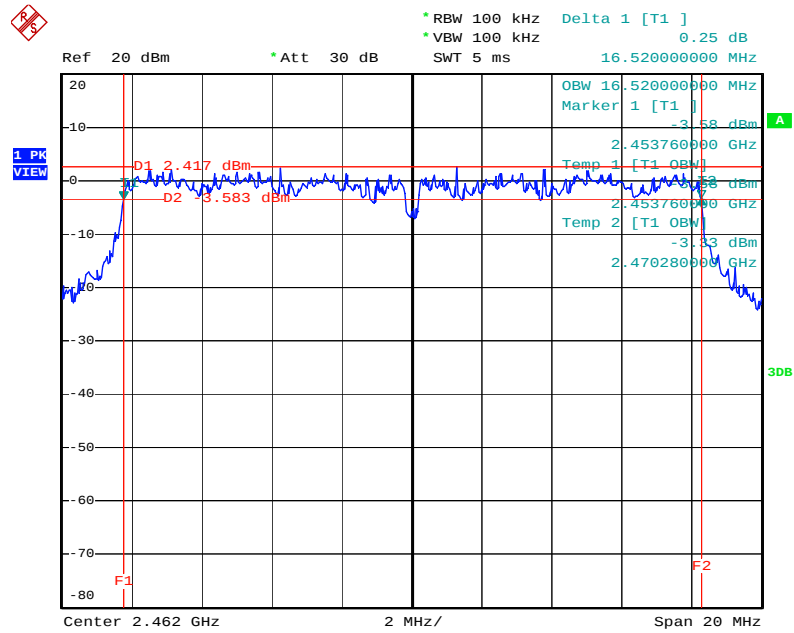

Date: 28.MAY.2010 11:22:22


<For Antenna 6>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2 / 2422 MHz

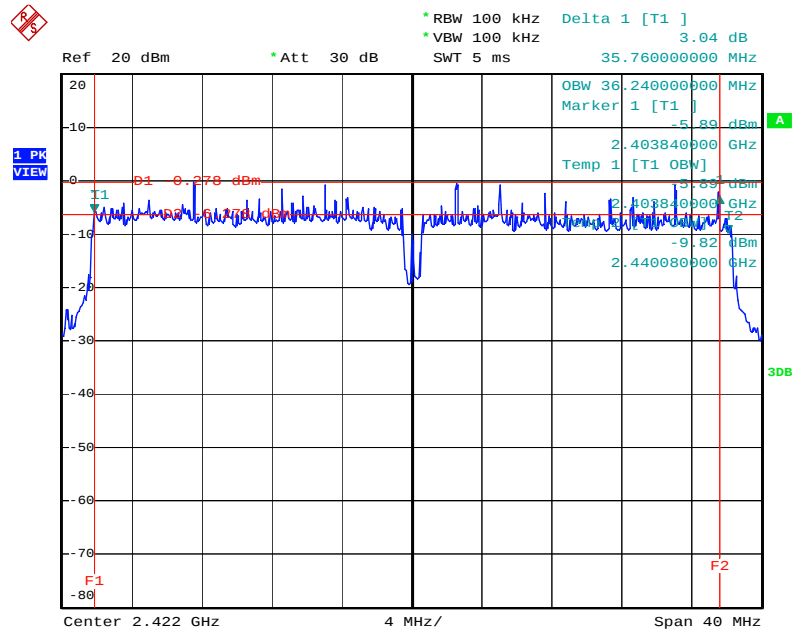


Date: 28.MAY.2010 12:00:21

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2 / 2437 MHz

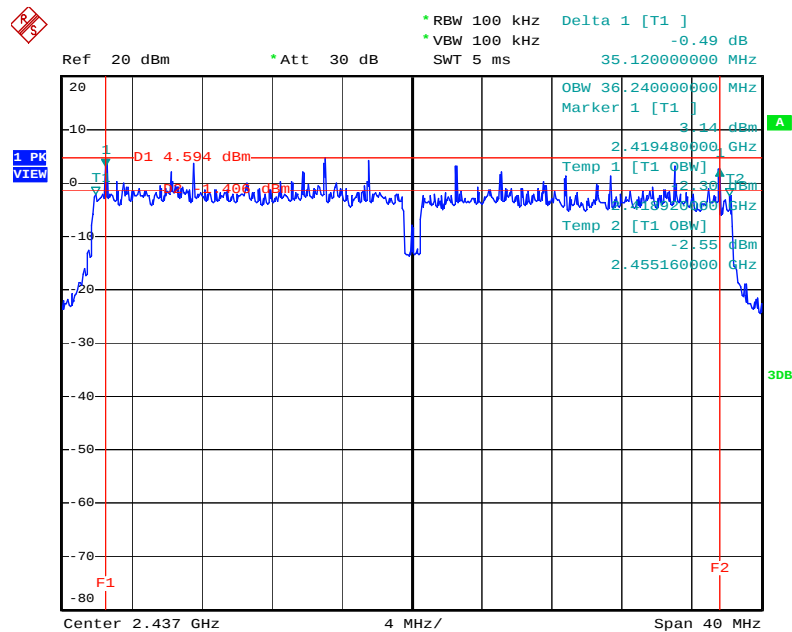


Date: 28.MAY.2010 11:58:24

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 6-1 + Ant. 6-2 / 2452 MHz

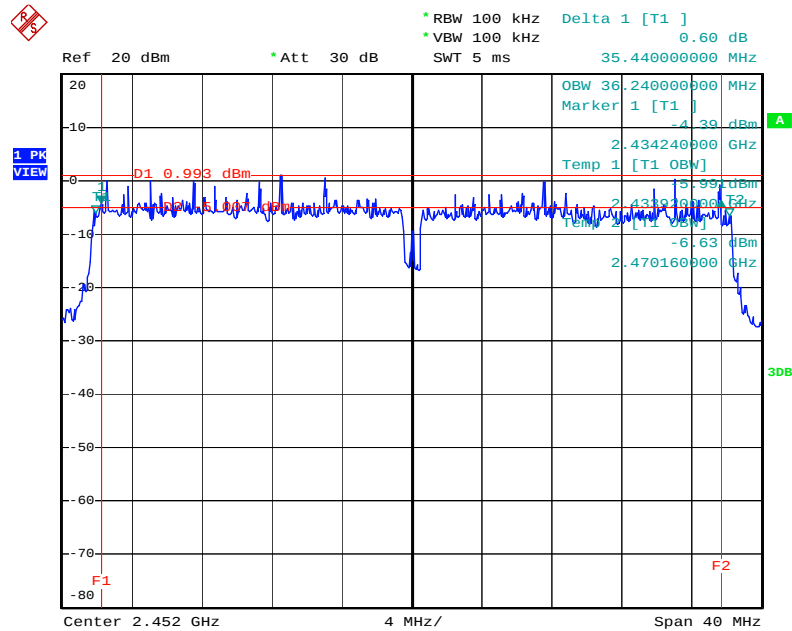


Date: 28.MAY.2010 11:56:20

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2412 MHz

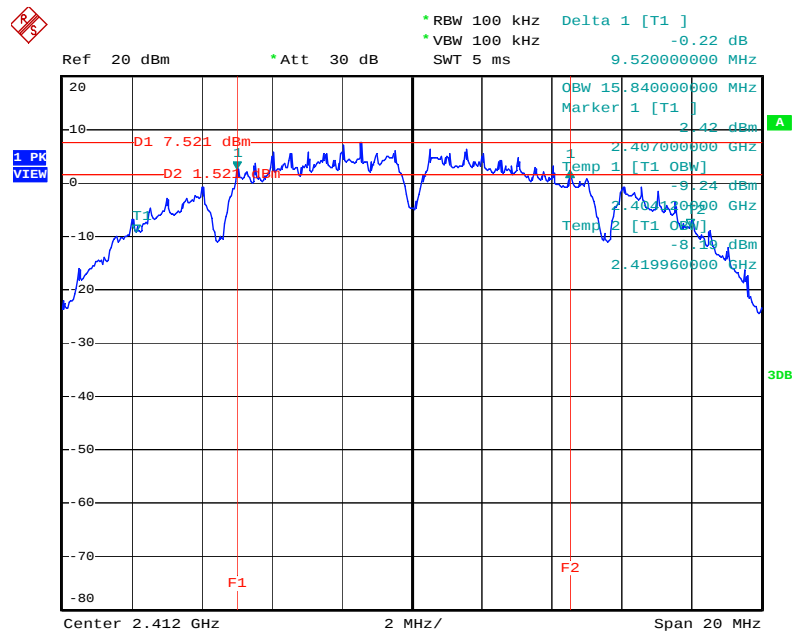


Date: 28.MAY.2010 12:11:23

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2437 MHz

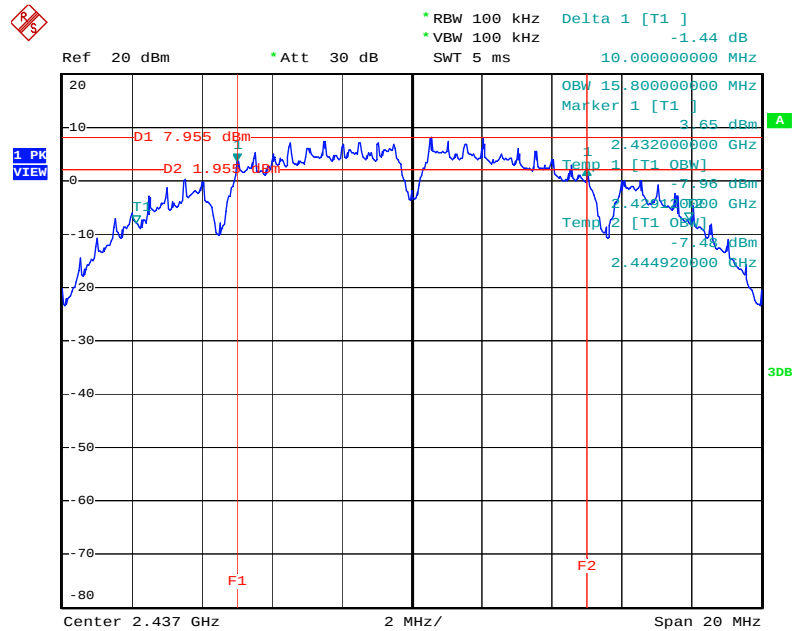


Date: 28.MAY.2010 12:10:34

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 6-1 + Ant. 6-2 / 2462 MHz

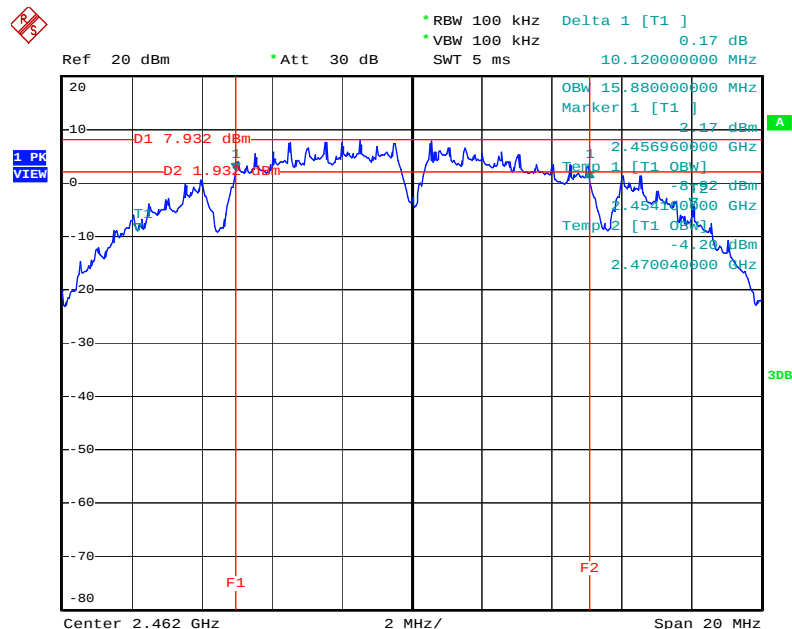


Date: 28.MAY.2010 12:10:07

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2412 MHz

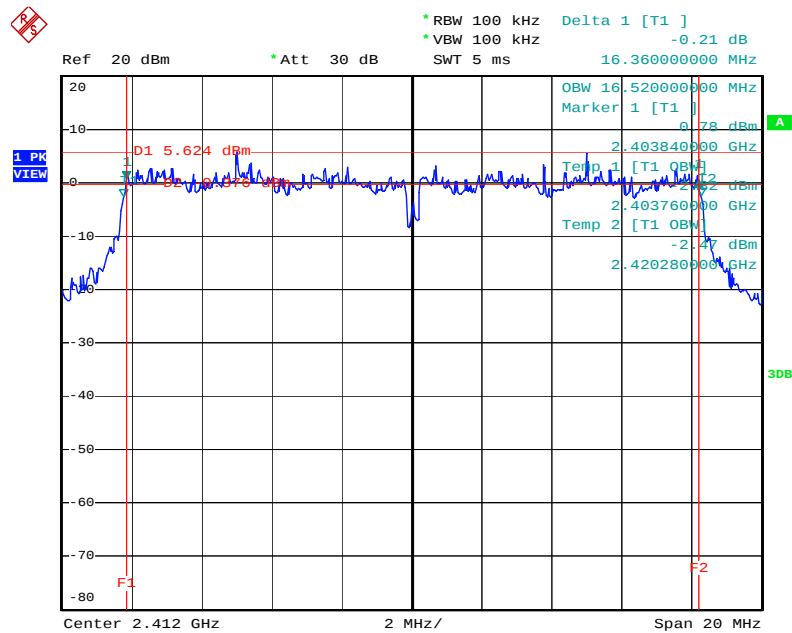


Date: 28.MAY.2010 12:02:33

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2437 MHz

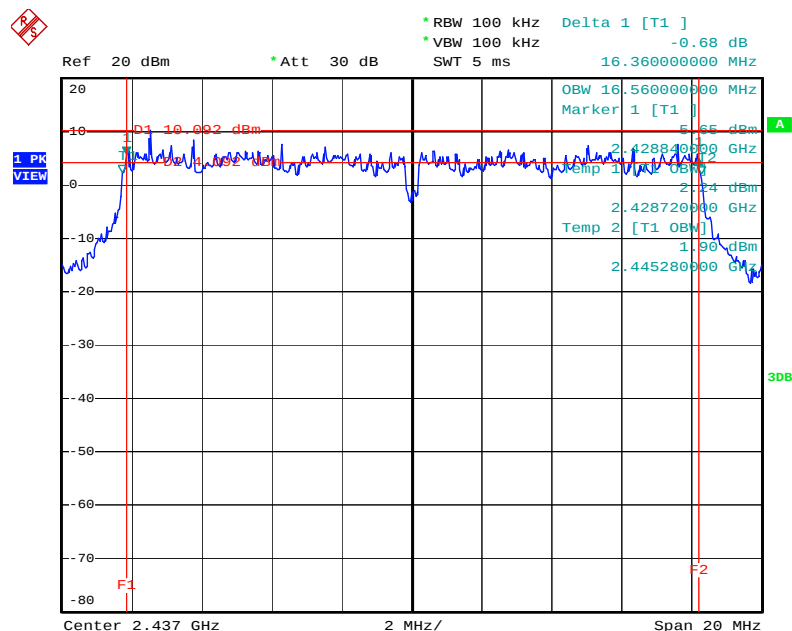

Date: 28.MAY.2010 12:04:33


6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 6-1 + Ant. 6-2 / 2462 MHz

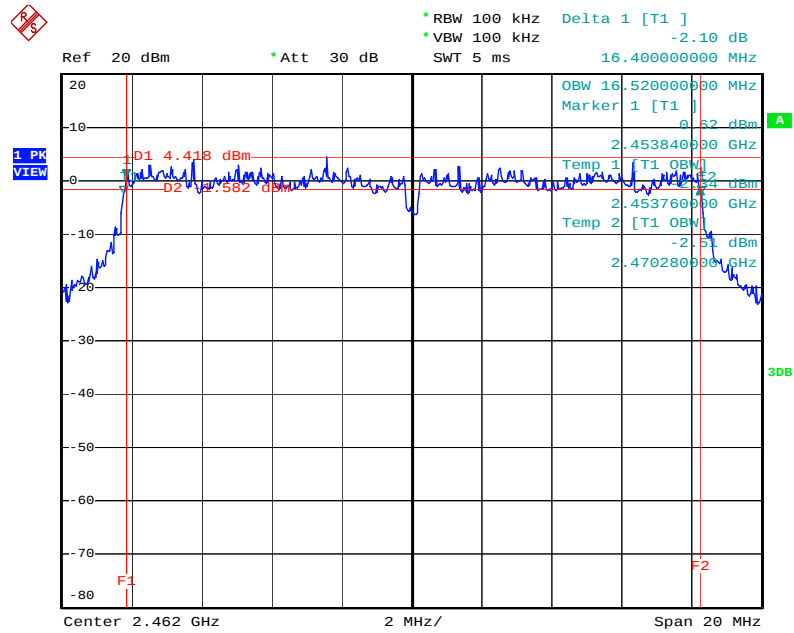

Date: 28.MAY.2010 12:07:32


<For Antenna 7>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2 / 2422 MHz

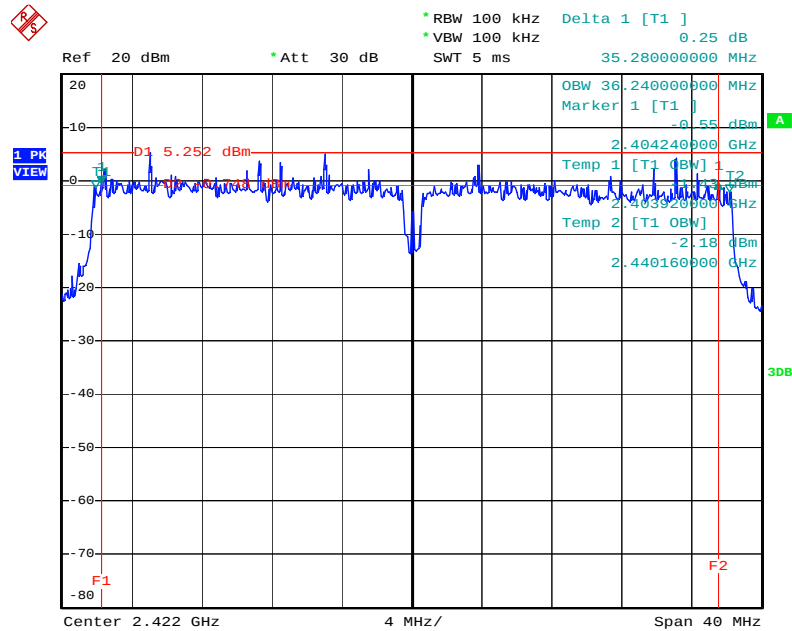


Date: 28.MAY.2010 12:57:19

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2 / 2437 MHz

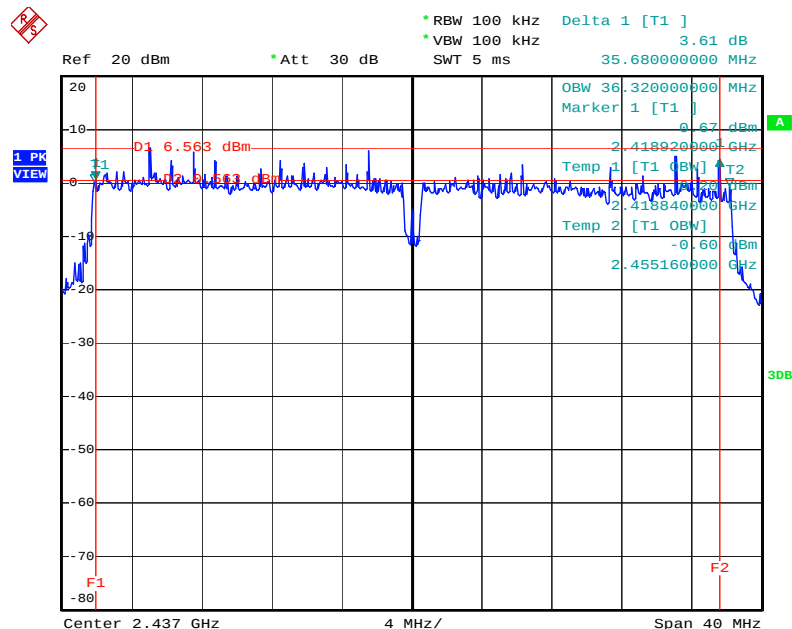


Date: 28.MAY.2010 12:55:28

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 7-1 + Ant. 7-2 / 2452 MHz

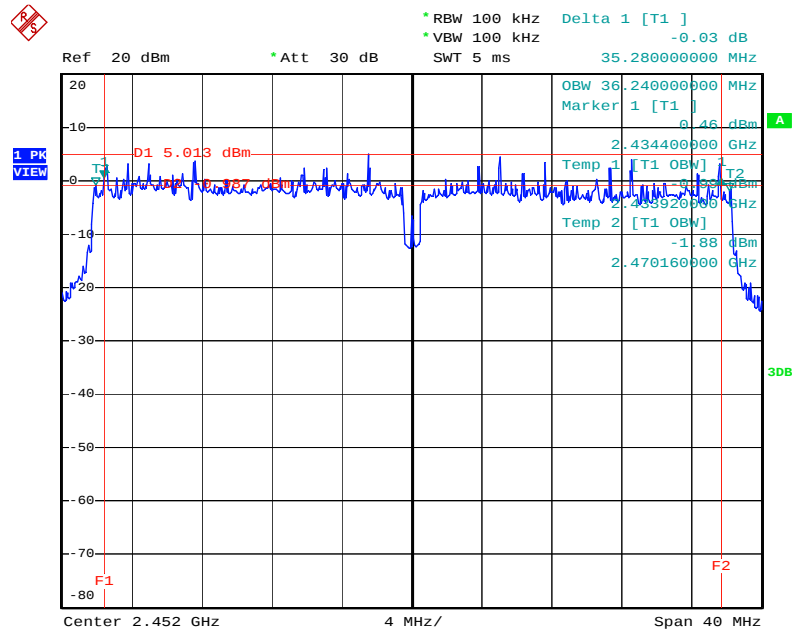


Date: 28.MAY.2010 12:53:29

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2412 MHz

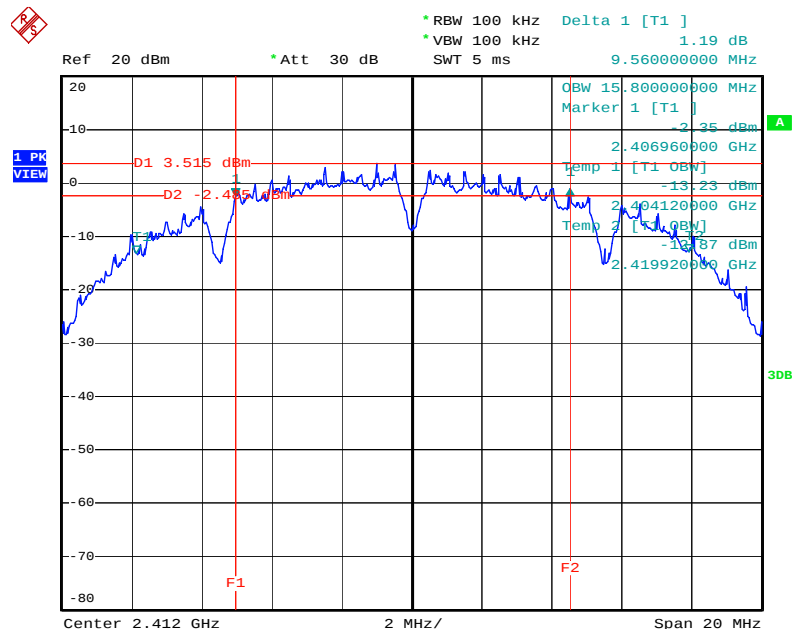


Date: 28.MAY.2010 12:36:07

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2437 MHz

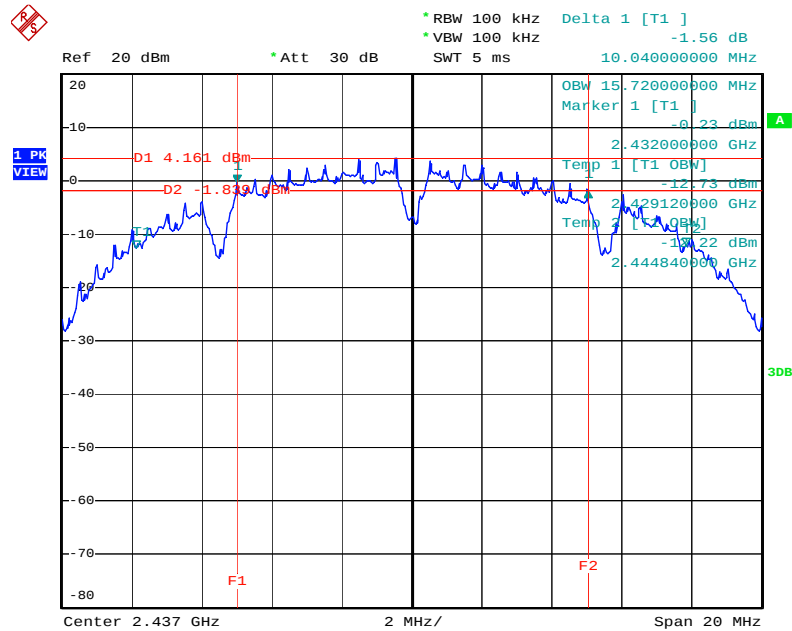


Date: 28.MAY.2010 12:35:32

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 7-1 + Ant. 7-2 / 2462 MHz

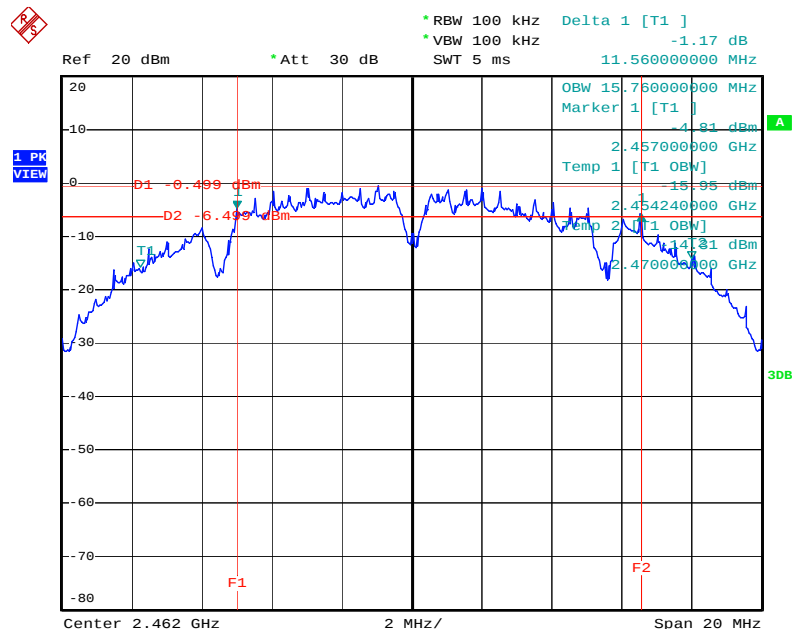


Date: 28.MAY.2010 12:34:56

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2412 MHz

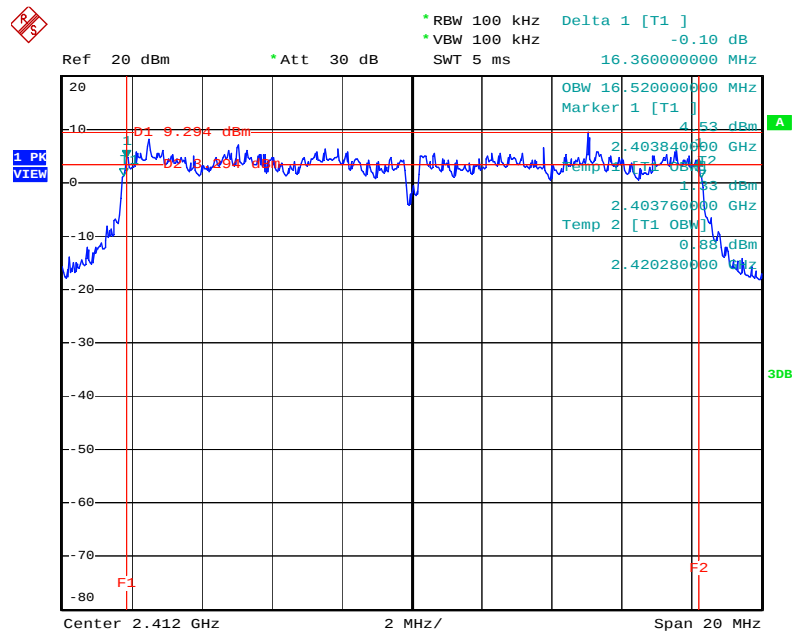


Date: 28.MAY.2010 12:47:16

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2437 MHz

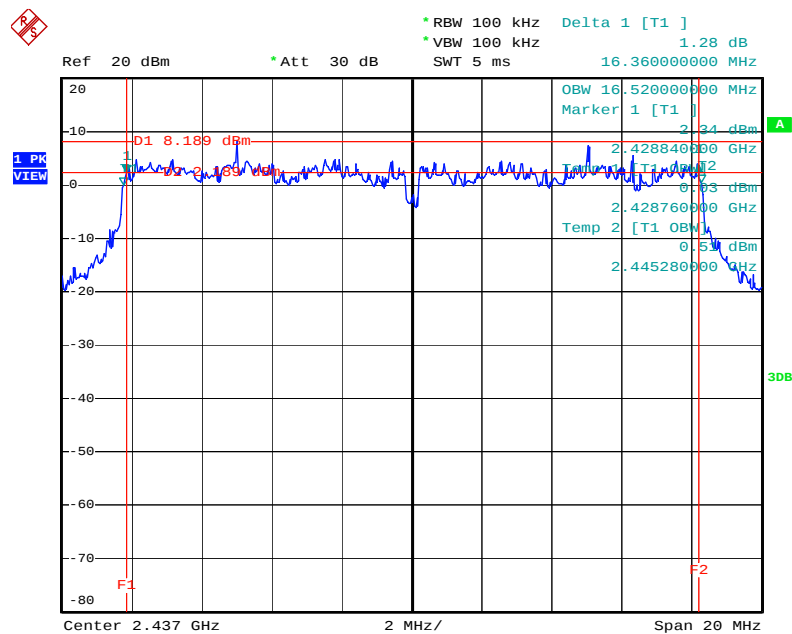

Date: 28.MAY.2010 12:49:20

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 7-1 + Ant. 7-2 / 2462 MHz

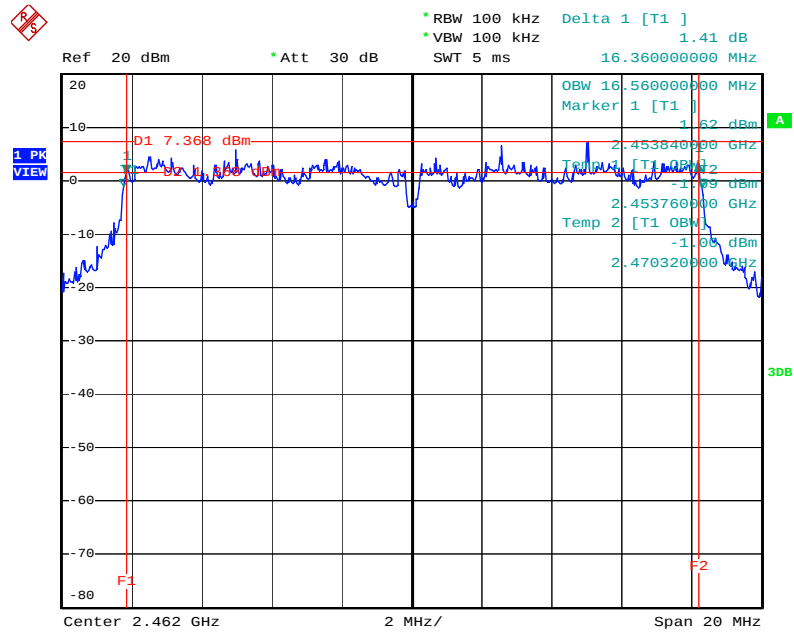

Date: 28.MAY.2010 12:51:11

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

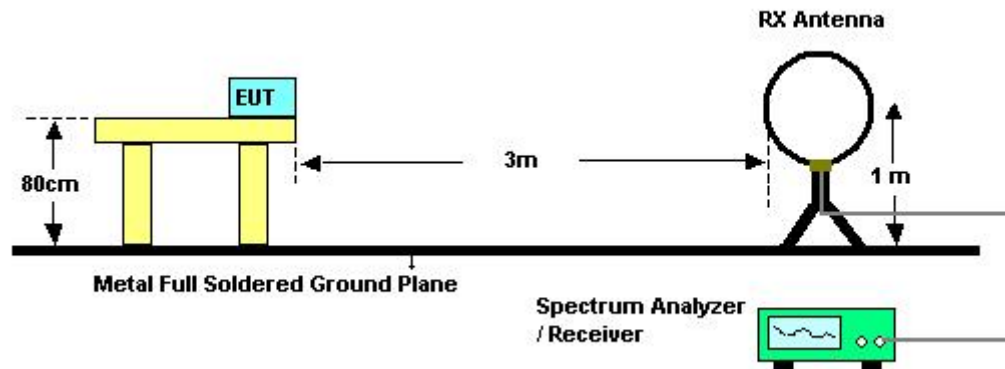

For radiated emissions above 30MHz

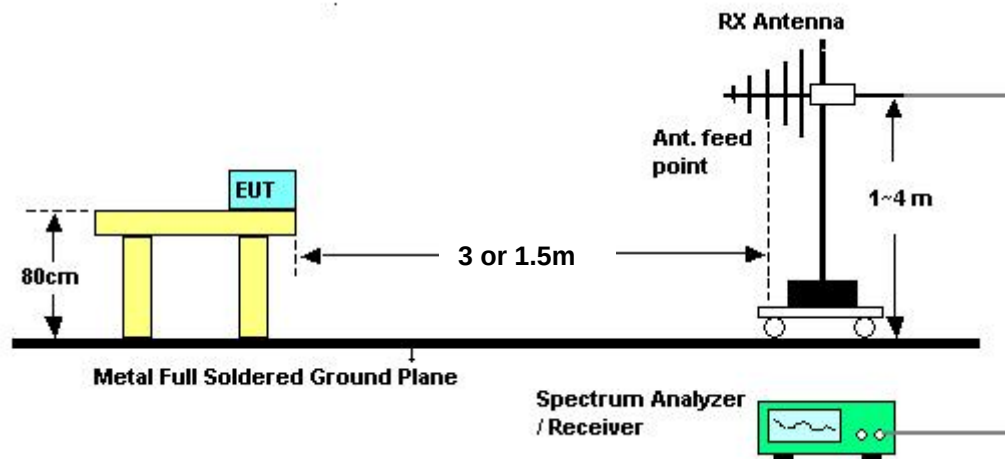

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang		
Evaluating Date	Jun. 08, 2010		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

<For Mode 1 (Ant. 1)>:


Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	Normal Link / Mode 1 (Ant. 1)

Horizontal

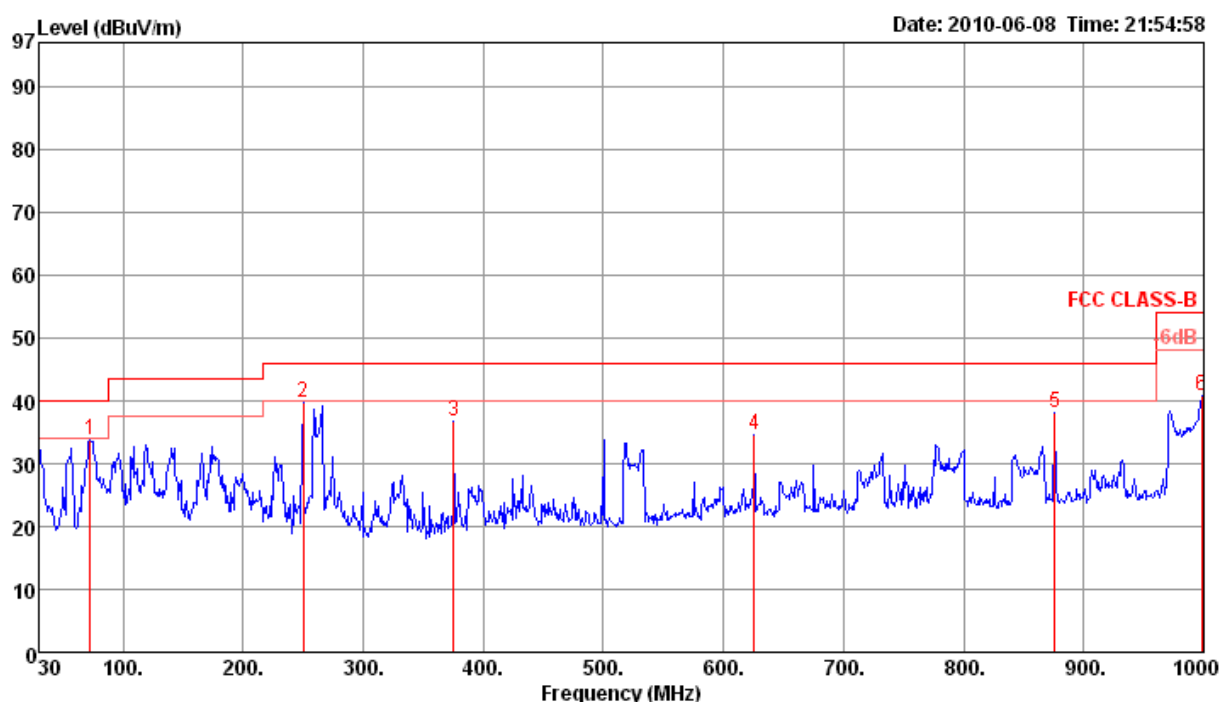

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	72.68	33.87	40.00	-6.13	53.94	0.86	27.71	6.78	0	100	Peak	HORIZONTAL
2	250.19	39.77	46.00	-6.23	52.10	1.90	27.00	12.77	0	100	Peak	HORIZONTAL
3	375.32	36.81	46.00	-9.19	46.59	2.25	27.43	15.40	0	100	Peak	HORIZONTAL
4	625.58	34.47	46.00	-11.53	40.64	3.05	28.07	18.85	0	100	Peak	HORIZONTAL
5	875.84	38.22	46.00	-7.78	41.82	3.50	27.45	20.35	0	100	Peak	HORIZONTAL
6	998.06	40.74	54.00	-13.26	42.77	3.70	27.01	21.28	0	100	Peak	HORIZONTAL

Vertical

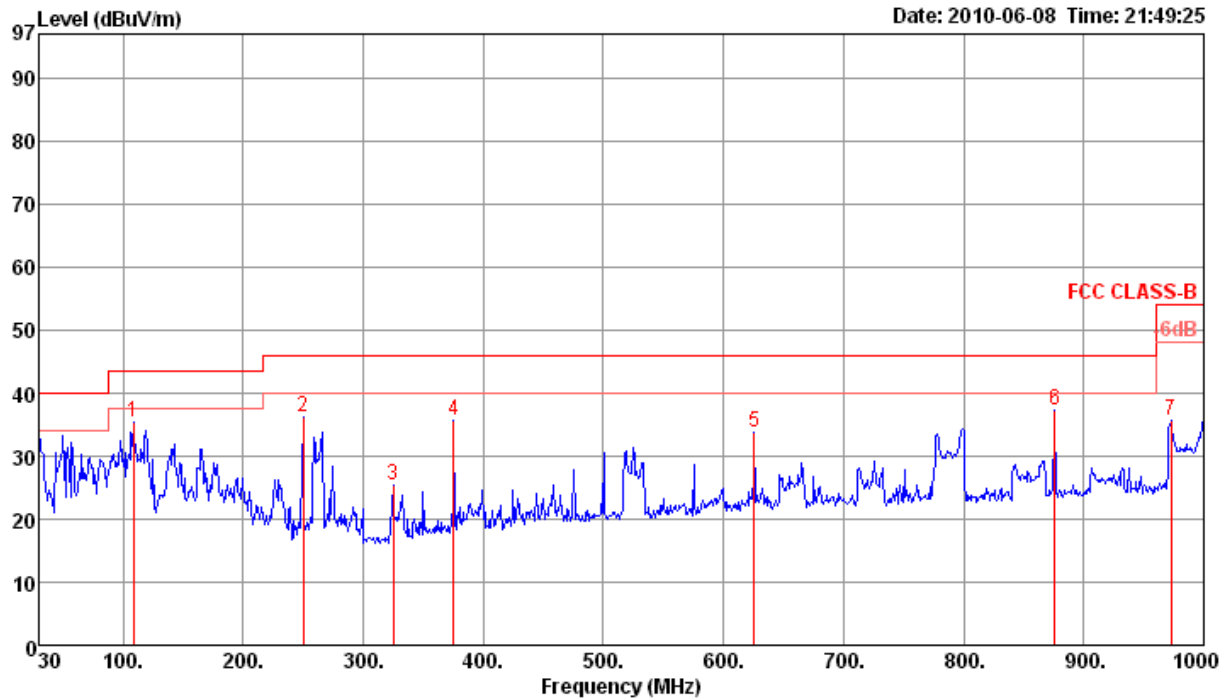

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	108.57	35.52	43.50	-7.98	50.23	1.20	27.56	11.65	0	400	Peak	VERTICAL
2	250.19	36.07	46.00	-9.93	48.40	1.90	27.00	12.77	0	400	Peak	VERTICAL
3	324.88	25.50	46.00	-20.50	36.38	2.15	27.07	14.04	0	400	Peak	VERTICAL
4	375.32	35.69	46.00	-10.31	45.47	2.25	27.43	15.40	0	400	Peak	VERTICAL
5	625.58	33.80	46.00	-12.20	39.97	3.05	28.07	18.85	0	400	Peak	VERTICAL
6	875.84	37.35	46.00	-8.65	40.95	3.50	27.45	20.35	0	400	Peak	VERTICAL
7	972.84	35.58	54.00	-18.42	37.96	3.65	27.11	21.08	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 5 (Ant. 5)>:


Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	Normal Link / Mode 5 (Ant. 5)

Horizontal

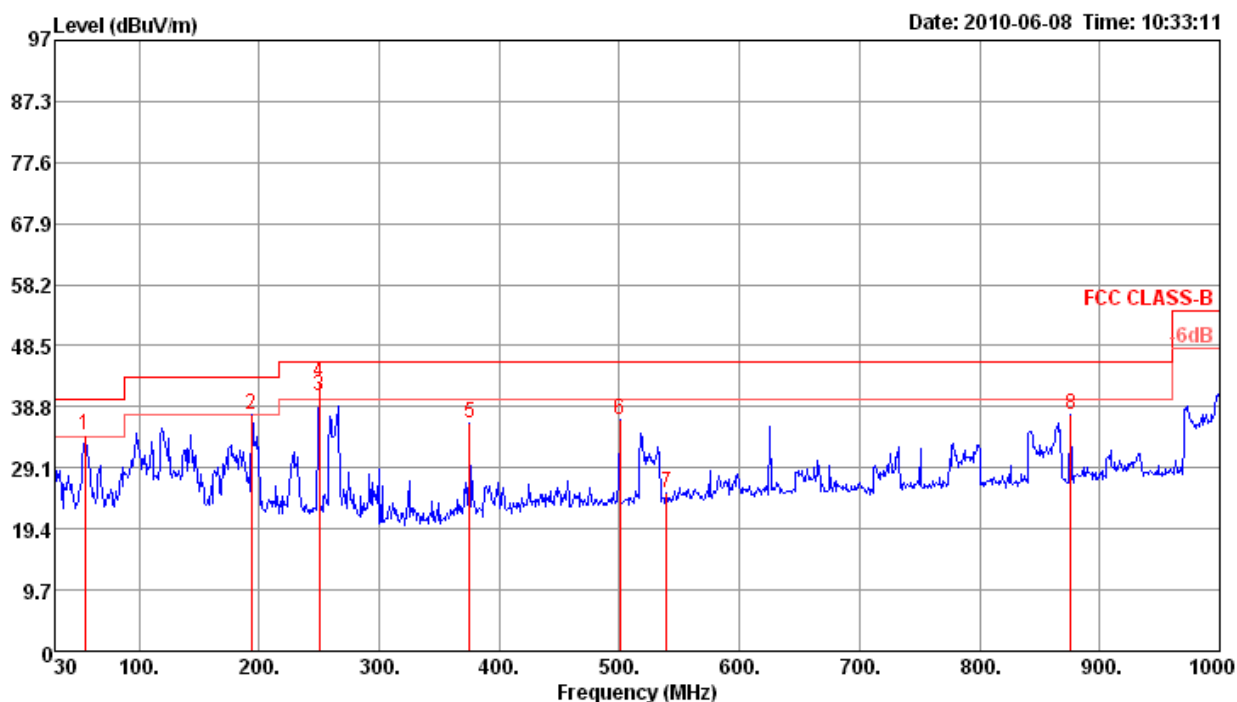

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	55.22	34.30	40.00	-5.70	53.63	0.80	27.78	7.65	0	100	Peak	HORIZONTAL
2	193.93	37.52	43.50	-5.98	52.70	1.67	27.13	10.28	0	100	Peak	HORIZONTAL
3	250.00	40.57	46.00	-5.43	52.90	1.90	27.00	12.77	53	117	QP	HORIZONTAL
4	250.19	42.73	46.00	-3.27	55.06	1.90	27.00	12.77	0	100	Peak	HORIZONTAL
5	375.32	36.19	46.00	-9.81	45.97	2.25	27.43	15.40	0	100	Peak	HORIZONTAL
6	500.45	36.80	46.00	-9.20	44.57	2.70	28.10	17.63	0	100	Peak	HORIZONTAL
7	539.25	25.05	46.00	-20.95	32.30	2.78	28.10	18.07	0	100	Peak	HORIZONTAL
8	875.84	37.62	46.00	-8.38	41.22	3.50	27.45	20.35	0	100	Peak	HORIZONTAL

Vertical

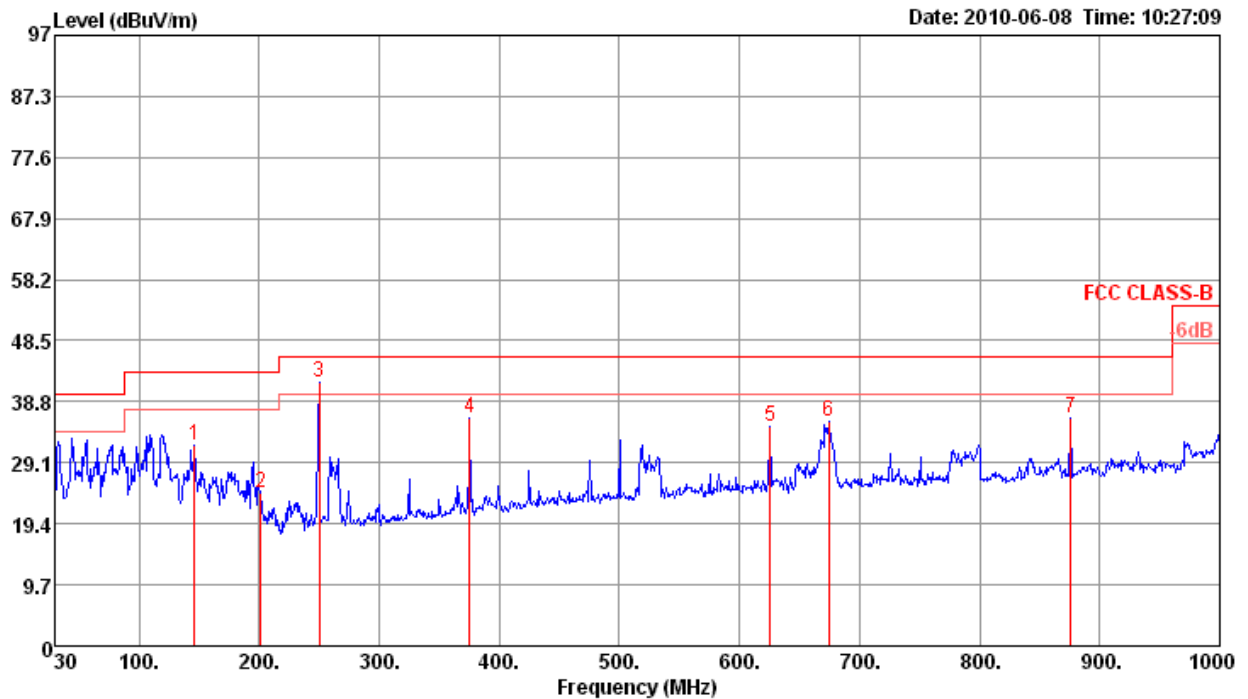

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	146.40	31.95	43.50	-11.55	45.86	1.43	27.37	12.03	0	400	Peak	VERTICAL
2	201.69	24.37	43.50	-19.13	40.56	1.71	27.09	9.19	0	400	Peak	VERTICAL
3	250.19	41.96	46.00	-4.04	54.29	1.90	27.00	12.77	0	400	Peak	VERTICAL
4	375.32	36.19	46.00	-9.81	45.97	2.25	27.43	15.40	0	400	Peak	VERTICAL
5	625.58	34.77	46.00	-11.23	40.94	3.05	28.07	18.85	0	400	Peak	VERTICAL
6	674.08	35.57	46.00	-10.43	41.19	3.40	28.03	19.01	0	400	Peak	VERTICAL
7	875.84	36.34	46.00	-9.66	39.94	3.50	27.45	20.35	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Mode 1 (Ant. 1)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 151 / Mode 1 (Ant. 1)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11509.99	43.34	60.00	-16.66	34.59	5.24	38.79	35.28	207	100 Average	HORIZONTAL
2	11509.99	59.65	80.00	-20.35	50.90	5.24	38.79	35.28	207	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11509.99	65.65	80.00	-14.35	56.90	5.24	38.79	35.28	207	100 Peak	VERTICAL
2	11510.03	49.41	60.00	-10.59	40.66	5.24	38.79	35.28	207	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 159 / Mode 1 (Ant. 1)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11590.02	59.67	80.00	-20.33	50.88	5.26	38.83	35.30	269	100 Peak	HORIZONTAL
2	11590.03	43.15	60.00	-16.85	34.36	5.26	38.83	35.30	269	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11590.00	63.41	80.00	-16.59	54.62	5.26	38.83	35.30	209	100 Peak	VERTICAL
2	11590.03	47.25	60.00	-12.75	38.46	5.26	38.83	35.30	209	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 149 / Mode 1 (Ant. 1)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11489.99	46.87	60.00	-13.13	38.13	5.24	38.78	35.28	268	100	Average	HORIZONTAL
2	11490.00	60.92	80.00	-19.08	52.18	5.24	38.78	35.28	268	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.01	65.82	80.00	-14.18	57.08	5.24	38.78	35.28	268	100	Peak	VERTICAL
2	11490.03	52.64	60.00	-7.36	43.90	5.24	38.78	35.28	268	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 157 / Mode 1 (Ant. 1)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11569.99	58.54	80.00	-21.46	49.76	5.25	38.83	35.30	247	100 Peak	HORIZONTAL
2	11570.03	44.99	60.00	-15.01	36.21	5.25	38.83	35.30	247	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11570.02	65.58	80.00	-14.42	56.80	5.25	38.83	35.30	268	100 Peak	VERTICAL
2	11570.03	51.16	60.00	-8.84	42.38	5.25	38.83	35.30	268	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 165 / Mode 1 (Ant. 1)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11650.01	58.67	80.00	-21.33	49.83	5.28	38.86	35.30	268	100	Peak	HORIZONTAL
2	11650.03	43.94	60.00	-16.06	35.10	5.28	38.86	35.30	268	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.97	48.61	60.00	-11.39	39.77	5.28	38.86	35.30	137	100	Average	VERTICAL
2	11650.00	62.60	80.00	-17.40	53.76	5.28	38.86	35.30	137	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 2 (Ant. 2)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 151 / Mode 2 (Ant. 2)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11510.01	44.67	60.00	-15.33	35.92	5.24	38.79	35.28	152	100 Average	HORIZONTAL
2	11510.02	60.66	80.00	-19.34	51.91	5.24	38.79	35.28	152	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11509.97	54.82	60.00	-5.18	46.07	5.24	38.79	35.28	190	100 Average	VERTICAL
2	11509.99	68.83	80.00	-11.17	60.08	5.24	38.79	35.28	190	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 159 / Mode 2 (Ant. 2)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11589.97	45.74	60.00	-14.26	36.95	5.26	38.83	35.30	170	100 Average	HORIZONTAL
2	11590.00	61.91	80.00	-18.09	53.12	5.26	38.83	35.30	170	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11589.97	52.36	60.00	-7.64	43.57	5.26	38.83	35.30	188	100 Average	VERTICAL
2	11590.02	68.35	80.00	-11.65	59.56	5.26	38.83	35.30	188	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 149 / Mode 2 (Ant. 2)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11489.97	48.52	60.00	-11.48	39.78	5.24	38.78	35.28	224	100 Average	HORIZONTAL
2	11490.01	61.28	80.00	-18.72	52.54	5.24	38.78	35.28	224	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11489.97	57.09	60.00	-2.91	48.35	5.24	38.78	35.28	189	100 Average	VERTICAL
2	11490.02	70.81	80.00	-9.19	62.07	5.24	38.78	35.28	189	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 157 / Mode 2 (Ant. 2)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11569.97	46.72	60.00	-13.28	37.94	5.25	38.83	35.30	249	100	Average	HORIZONTAL
2	11569.98	55.78	80.00	-24.22	47.00	5.25	38.83	35.30	249	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11569.98	70.66	80.00	-9.34	61.88	5.25	38.83	35.30	188	100	Peak	VERTICAL
2	11569.99	56.70	60.00	-3.30	47.92	5.25	38.83	35.30	188	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 165 / Mode 2 (Ant. 2)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.97	48.84	60.00	-11.16	40.00	5.28	38.86	35.30	158	100	Average	HORIZONTAL
2	11650.00	57.26	80.00	-22.74	48.42	5.28	38.86	35.30	158	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.97	52.76	60.00	-7.24	43.92	5.28	38.86	35.30	187	100	Average	VERTICAL
2	11649.98	67.45	80.00	-12.55	58.61	5.28	38.86	35.30	187	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 3 (Ant. 3)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 151 / Mode 3 (Ant. 3)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11510.02	62.67	80.00	-17.33	53.92	5.24	38.79	35.28	257	100 Peak	HORIZONTAL
2	11510.03	46.34	60.00	-13.66	37.59	5.24	38.79	35.28	257	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	f/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11509.99	66.72	80.00	-13.28	57.97	5.24	38.79	35.28	236	100 Peak	VERTICAL
2	11510.01	53.59	60.00	-6.41	44.84	5.24	38.79	35.28	236	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 159 / Mode 3 (Ant. 3)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	11589.97	45.64	60.00	-14.36	36.85	5.26	38.83	35.30	236	100 Average	HORIZONTAL
2	11590.00	61.78	80.00	-18.22	52.99	5.26	38.83	35.30	236	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	11589.99	51.49	60.00	-8.51	42.70	5.26	38.83	35.30	239	100 Average	VERTICAL
2	11590.02	68.17	80.00	-11.83	59.38	5.26	38.83	35.30	239	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 149 / Mode 3 (Ant. 3)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11490.02	63.37	80.00	-16.63	54.63	5.24	38.78	35.28	236	100 Peak	HORIZONTAL
2	11490.03	49.01	60.00	-10.99	40.27	5.24	38.78	35.28	236	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	11489.97	55.30	60.00	-4.70	46.56	5.24	38.78	35.28	239	100 Average	VERTICAL
2	11489.99	70.24	80.00	-9.76	61.50	5.24	38.78	35.28	239	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 157 / Mode 3 (Ant. 3)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11569.97	50.09	60.00	-9.91	41.31	5.25	38.83	35.30	258	100 Average	HORIZONTAL
2	11570.02	62.38	80.00	-17.62	53.60	5.25	38.83	35.30	258	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11569.97	56.15	60.00	-3.85	47.37	5.25	38.83	35.30	242	100 Average	VERTICAL
2	11569.99	68.32	80.00	-11.68	59.54	5.25	38.83	35.30	242	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 165 / Mode 3 (Ant. 3)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.97	45.38	60.00	-14.62	36.54	5.28	38.86	35.30	243	100	Average	HORIZONTAL
2	11650.02	58.08	80.00	-21.92	49.24	5.28	38.86	35.30	243	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.97	52.67	60.00	-7.33	43.83	5.28	38.86	35.30	238	100	Average	VERTICAL
2	11650.01	66.01	80.00	-13.99	57.17	5.28	38.86	35.30	238	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 4>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.99	43.43	74.00	-30.57	42.91	2.46	33.09	35.03	107	100 Peak	HORIZONTAL
2	4844.01	29.49	54.00	-24.51	28.97	2.46	33.09	35.03	107	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.01	43.63	74.00	-30.37	43.11	2.46	33.09	35.03	218	100 Peak	VERTICAL
2	4844.03	31.01	54.00	-22.99	30.49	2.46	33.09	35.03	218	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 6 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4873.98	29.93	54.00	-24.07	29.33	2.47	33.16	35.03	143	100 Average	HORIZONTAL
2	4873.98	42.43	74.00	-31.57	41.83	2.47	33.16	35.03	143	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4874.02	43.59	74.00	-30.41	42.99	2.47	33.16	35.03	344	100 Peak	VERTICAL
2	4874.03	31.79	54.00	-22.21	31.19	2.47	33.16	35.03	344	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 9 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4904.00	43.44	74.00	-30.56	42.80	2.47	33.19	35.02	20	100 Peak	HORIZONTAL
2	4904.01	30.95	54.00	-23.05	30.31	2.47	33.19	35.02	20	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4903.99	43.66	74.00	-30.34	43.02	2.47	33.19	35.02	328	100 Peak	VERTICAL
2	4904.03	31.67	54.00	-22.33	31.03	2.47	33.19	35.02	328	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 151 / Mode 4 (Ant. 4)
Test Date	May 22, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11510.20	62.20	80.00	-17.80	53.45	5.24	38.79	35.28	286	119 Peak	HORIZONTAL
2	11510.60	47.83	60.00	-12.17	39.08	5.24	38.79	35.28	286	119 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11510.60	49.91	60.00	-10.09	41.16	5.24	38.79	35.28	286	100 Average	VERTICAL
2	11510.60	64.68	80.00	-15.32	55.93	5.24	38.79	35.28	286	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11an MCS8 40MHz CH 159 / Mode 4 (Ant. 4)
Test Date	May 22, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11589.20	45.92	60.00	-14.08	37.13	5.26	38.83	35.30	287	114 Average	HORIZONTAL
2	11590.00	61.18	80.00	-18.82	52.39	5.26	38.83	35.30	287	114 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11589.00	49.81	60.00	-10.19	41.02	5.26	38.83	35.30	39	100 Average	VERTICAL
2	11590.00	65.10	80.00	-14.90	56.31	5.26	38.83	35.30	39	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.05	42.77	54.00	-11.23	42.28	2.46	33.06	35.03	278	174	Average	HORIZONTAL
2	4824.12	48.39	74.00	-25.61	47.90	2.46	33.06	35.03	278	174	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.96	51.45	74.00	-22.55	50.96	2.46	33.06	35.03	282	100	Peak	VERTICAL
2	4824.05	47.50	54.00	-6.50	47.01	2.46	33.06	35.03	282	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 6 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.99	45.02	54.00	-8.98	44.42	2.47	33.16	35.03	103	144	Average	HORIZONTAL
2	4874.08	49.26	74.00	-24.74	48.66	2.47	33.16	35.03	103	144	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.95	53.76	54.00	-0.24	53.16	2.47	33.16	35.03	54	148	Average	VERTICAL
2	4874.04	55.77	74.00	-18.23	55.17	2.47	33.16	35.03	54	148	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 11 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.05	43.89	54.00	-10.11	43.17	2.47	33.26	35.01	102	153	Average	HORIZONTAL
2	4924.15	49.15	74.00	-24.85	48.43	2.47	33.26	35.01	102	153	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.02	50.47	74.00	-23.53	49.75	2.47	33.26	35.01	285	168	Peak	VERTICAL
2	4924.03	47.29	54.00	-6.71	46.57	2.47	33.26	35.01	285	168	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.98	30.10	54.00	-23.90	29.61	2.46	33.06	35.03	21	100	Average	HORIZONTAL
2	4823.99	43.30	74.00	-30.70	42.81	2.46	33.06	35.03	21	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.98	43.49	74.00	-30.51	43.00	2.46	33.06	35.03	132	100	Peak	VERTICAL
2	4824.03	31.91	54.00	-22.09	31.42	2.46	33.06	35.03	132	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 6 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.99	42.20	74.00	-31.80	41.60	2.47	33.16	35.03	139	100	Peak	HORIZONTAL
2	4873.99	29.63	54.00	-24.37	29.03	2.47	33.16	35.03	139	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.98	31.30	54.00	-22.70	30.70	2.47	33.16	35.03	247	100	Average	VERTICAL
2	4874.01	43.18	74.00	-30.82	42.58	2.47	33.16	35.03	247	100	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4924.00	43.81	74.00	-30.19	43.09	2.47	33.26	35.01	266	100	Peak	HORIZONTAL
2	4924.03	29.80	54.00	-24.20	29.08	2.47	33.26	35.01	266	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4924.01	43.70	74.00	-30.30	42.98	2.47	33.26	35.01	153	100	Peak	VERTICAL
2	4924.03	30.94	54.00	-23.06	30.22	2.47	33.26	35.01	153	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 149 / Mode 4 (Ant. 4)
Test Date	May 22, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.40	59.00	80.00	-21.00	50.26	5.24	38.78	35.28	166	100	Peak	HORIZONTAL
2	11491.60	44.96	60.00	-15.04	36.22	5.24	38.78	35.28	166	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.60	64.45	80.00	-15.55	55.71	5.24	38.78	35.28	298	100	Peak	VERTICAL
2	11490.80	49.75	60.00	-10.25	41.01	5.24	38.78	35.28	298	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 157 / Mode 4 (Ant. 4)
Test Date	May 22, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11570.00	60.51	80.00	-19.49	51.73	5.25	38.83	35.30	290	112 Peak	HORIZONTAL
2	11571.00	46.10	60.00	-13.90	37.32	5.25	38.83	35.30	290	112 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11569.20	50.42	60.00	-9.58	41.64	5.25	38.83	35.30	40	125 Average	VERTICAL
2	11570.20	65.79	80.00	-14.21	57.01	5.25	38.83	35.30	40	125 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11a CH 165 / Mode 4 (Ant. 4)
Test Date	May 22, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11642.00	42.49	60.00	-17.51	33.65	5.28	38.86	35.30	154	100	Average	HORIZONTAL
2	11642.00	53.30	80.00	-26.70	44.46	5.28	38.86	35.30	154	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11644.40	65.77	80.00	-14.23	56.93	5.28	38.86	35.30	38	100	Peak	VERTICAL
2	11649.60	50.98	60.00	-9.02	42.14	5.28	38.86	35.30	38	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 5 (Ant. 5)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.99	30.53	54.00	-23.47	30.01	2.46	33.09	35.03	172	100 Average	HORIZONTAL
2	4844.01	44.28	74.00	-29.72	43.76	2.46	33.09	35.03	172	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.01	45.71	74.00	-28.29	45.19	2.46	33.09	35.03	247	100 Peak	VERTICAL
2	4844.03	33.25	54.00	-20.75	32.73	2.46	33.09	35.03	247	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 6 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.98	30.79	54.00	-23.21	30.19	2.47	33.16	35.03	207	100	Average
2	4874.00	43.56	74.00	-30.44	42.96	2.47	33.16	35.03	207	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.00	48.21	74.00	-25.79	47.61	2.47	33.16	35.03	274	100	Peak	VERTICAL
2	4874.01	35.70	54.00	-18.30	35.10	2.47	33.16	35.03	274	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 9 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4904.02	43.83	74.00	-30.17	43.19	2.47	33.19	35.02	166	100 Peak	HORIZONTAL
2	4904.03	31.49	54.00	-22.51	30.85	2.47	33.19	35.02	166	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4903.99	46.50	74.00	-27.50	45.86	2.47	33.19	35.02	84	100 Peak	VERTICAL
2	4904.01	32.09	54.00	-21.91	31.45	2.47	33.19	35.02	84	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4823.92	49.78	74.00	-24.22	49.29	2.46	33.06	35.03	307	165	Peak	HORIZONTAL
2	4824.05	44.57	54.00	-9.43	44.08	2.46	33.06	35.03	307	165	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4823.99	53.45	54.00	-0.55	52.96	2.46	33.06	35.03	263	155	Average	VERTICAL
2	4824.08	55.80	74.00	-18.20	55.31	2.46	33.06	35.03	263	155	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 6 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4874.03	47.30	54.00	-6.70	46.70	2.47	33.16	35.03	307	151 Average	HORIZONTAL
2	4874.10	51.11	74.00	-22.89	50.51	2.47	33.16	35.03	307	151 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4873.95	55.79	74.00	-18.21	55.19	2.47	33.16	35.03	242	125 Peak	VERTICAL
2	4874.05	53.70	54.00	-0.30	53.10	2.47	33.16	35.03	242	125 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 11 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.92	50.40	74.00	-23.60	49.68	2.47	33.26	35.01	219	142	Peak	HORIZONTAL
2	4924.05	45.45	54.00	-8.55	44.73	2.47	33.26	35.01	219	142	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.01	53.53	54.00	-0.47	52.81	2.47	33.26	35.01	282	154	Average	VERTICAL
2	4924.06	55.87	74.00	-18.13	55.15	2.47	33.26	35.01	282	154	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor				
						dB	dB/m	dB	deg	cm		
1	4823.98	32.38	54.00	-21.62	31.89	2.46	33.06	35.03	228	100	Average	HORIZONTAL
2	4824.01	44.02	74.00	-29.98	43.53	2.46	33.06	35.03	228	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor				
						dB	dB/m	dB	deg	cm		
1	4824.00	50.88	74.00	-23.12	50.39	2.46	33.06	35.03	248	100	Peak	VERTICAL
2	4824.03	37.27	54.00	-16.73	36.78	2.46	33.06	35.03	248	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 6 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4873.98	32.89	54.00	-21.11	32.29	2.47	33.16	35.03	181	100	Average	HORIZONTAL
2	4874.00	45.97	74.00	-28.03	45.37	2.47	33.16	35.03	181	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4873.98	41.49	54.00	-12.51	40.89	2.47	33.16	35.03	94	100	Average	VERTICAL
2	4874.02	52.35	74.00	-21.65	51.75	2.47	33.16	35.03	94	100	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.00	48.32	74.00	-25.68	47.60	2.47	33.26	35.01	222	100	Peak	HORIZONTAL
2	4924.03	33.81	54.00	-20.19	33.09	2.47	33.26	35.01	222	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.02	53.78	74.00	-20.22	53.06	2.47	33.26	35.01	245	100	Peak	VERTICAL
2	4924.03	39.55	54.00	-14.45	38.83	2.47	33.26	35.01	245	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 6 (Ant. 6)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.02	44.08	74.00	-29.92	43.56	2.46	33.09	35.03	303	100 Peak	HORIZONTAL
2	4844.03	29.89	54.00	-24.11	29.37	2.46	33.09	35.03	303	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.01	43.29	74.00	-30.71	42.77	2.46	33.09	35.03	157	100 Peak	VERTICAL
2	4844.03	32.59	54.00	-21.41	32.07	2.46	33.09	35.03	157	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 6 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4874.02	43.79	74.00	-30.21	43.19	2.47	33.16	35.03	277	100 Peak	HORIZONTAL
2	4874.03	31.06	54.00	-22.94	30.46	2.47	33.16	35.03	277	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4873.99	49.83	74.00	-24.17	49.23	2.47	33.16	35.03	31	100 Peak	VERTICAL
2	4874.03	35.87	54.00	-18.13	35.27	2.47	33.16	35.03	31	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 9 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	4903.98	31.91	54.00	-22.09	31.27	2.47	33.19	35.02	158	100 Average	HORIZONTAL
2	4904.00	44.06	74.00	-29.94	43.42	2.47	33.19	35.02	158	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	4903.99	35.59	54.00	-18.41	34.95	2.47	33.19	35.02	42	100 Average	VERTICAL
2	4904.00	51.87	74.00	-22.13	51.23	2.47	33.19	35.02	42	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.02	51.72	74.00	-22.28	51.23	2.46	33.06	35.03	19	100	Peak	HORIZONTAL
2	4824.07	48.34	54.00	-5.66	47.85	2.46	33.06	35.03	19	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Limit	Level	Loss	Factor	Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.88	53.84	74.00	-20.16	53.35	2.46	33.06	35.03	40	100	Peak	VERTICAL
2	4824.03	51.25	54.00	-2.75	50.76	2.46	33.06	35.03	40	100	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 6 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4874.04	52.04	54.00	-1.96	51.44	2.47	33.16	35.03	69	103 Average	HORIZONTAL
2	4874.05	48.34	54.00	-5.66	47.74	2.47	33.16	35.03	69	103 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4874.05	53.17	54.00	-0.83	52.57	2.47	33.16	35.03	40	100 Average	VERTICAL
2	4874.11	55.33	74.00	-18.67	54.73	2.47	33.16	35.03	40	100 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 11 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4924.01	51.04	74.00	-22.96	50.32	2.47	33.26	35.01	69	100 Peak	HORIZONTAL
2	4924.03	47.50	54.00	-6.50	46.78	2.47	33.26	35.01	69	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4923.97	55.49	74.00	-18.51	54.77	2.47	33.26	35.01	44	113 Peak	VERTICAL
2	4924.03	53.69	54.00	-0.31	52.97	2.47	33.26	35.01	44	113 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4823.99	31.56	54.00	-22.44	31.07	2.46	33.06	35.03	201	100 Average	HORIZONTAL
2	4824.01	43.48	74.00	-30.52	42.99	2.46	33.06	35.03	201	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4823.99	51.57	74.00	-22.43	51.08	2.46	33.06	35.03	105	100 Peak	VERTICAL
2	4824.03	38.37	54.00	-15.63	37.88	2.46	33.06	35.03	105	100 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 6 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4873.99	48.96	74.00	-25.04	48.36	2.47	33.16	35.03	195	100	Peak	HORIZONTAL
2	4874.03	35.28	54.00	-18.72	34.68	2.47	33.16	35.03	195	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	4873.99	42.49	54.00	-11.51	41.89	2.47	33.16	35.03	41	129	Average	VERTICAL
2	4873.99	55.68	74.00	-18.32	55.08	2.47	33.16	35.03	41	129	Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.98	43.92	74.00	-30.08	43.20	2.47	33.26	35.01	138	100	Peak	HORIZONTAL
2	4924.03	30.81	54.00	-23.19	30.09	2.47	33.26	35.01	138	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.02	49.85	74.00	-24.15	49.13	2.47	33.26	35.01	33	100	Peak	VERTICAL
2	4924.03	37.45	54.00	-16.55	36.73	2.47	33.26	35.01	33	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 7 (Ant. 7)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	7272.60	35.70	54.00	-18.30	31.58	3.67	35.85	35.40	275	138 Average	HORIZONTAL
2	7272.60	48.81	74.00	-25.19	44.69	3.67	35.85	35.40	275	138 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	7261.20	58.77	74.00	-15.23	54.65	3.67	35.85	35.40	282	136 Peak	VERTICAL
2	7263.80	44.44	54.00	-9.56	40.32	3.67	35.85	35.40	282	136 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 6 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	7308.80	42.50	54.00	-11.50	38.26	3.68	35.96	35.40	297	143 Average	HORIZONTAL
2	7328.00	56.75	74.00	-17.25	52.48	3.68	35.99	35.40	297	143 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	7291.60	63.64	74.00	-10.36	59.45	3.67	35.92	35.40	286	171 Peak	VERTICAL
2	7314.00	50.17	54.00	-3.83	45.93	3.68	35.96	35.40	286	171 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 9 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	7344.20	57.33	74.00	-16.67	53.03	3.68	36.02	35.40	295	139 Peak	HORIZONTAL
2	7358.80	42.17	54.00	-11.83	37.83	3.68	36.06	35.40	295	139 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	7351.00	65.60	74.00	-8.40	61.30	3.68	36.02	35.40	279	150 Peak	VERTICAL
2	7353.40	50.79	54.00	-3.21	46.49	3.68	36.02	35.40	279	150 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4824.01	42.20	54.00	-11.80	41.71	2.46	33.06	35.03	295	100 Average	HORIZONTAL
2	4824.08	46.35	74.00	-27.65	45.86	2.46	33.06	35.03	295	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4824.03	53.36	54.00	-0.64	52.87	2.46	33.06	35.03	281	178 Average	VERTICAL
2	4824.06	55.16	74.00	-18.84	54.67	2.46	33.06	35.03	281	178 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 6 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4873.84	49.04	74.00	-24.96	48.44	2.47	33.16	35.03	245	176 Peak	HORIZONTAL
2	4874.03	45.37	54.00	-8.63	44.77	2.47	33.16	35.03	245	176 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	4874.02	55.29	74.00	-18.71	54.69	2.47	33.16	35.03	270	144 Peak	VERTICAL
2	4874.03	53.98	54.00	-0.02	53.38	2.47	33.16	35.03	270	144 Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 11 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4924.05	45.26	54.00	-8.74	44.54	2.47	33.26	35.01	250	129 Average	HORIZONTAL
2	4924.19	49.00	74.00	-25.00	48.28	2.47	33.26	35.01	250	129 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4924.09	53.88	54.00	-0.12	53.16	2.47	33.26	35.01	276	153 Average	VERTICAL
2	4924.09	55.60	74.00	-18.40	54.88	2.47	33.26	35.01	276	153 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor				
						dB	dB/m	dB	deg	cm		
1	7235.60	58.94	74.00	-15.06	54.90	3.66	35.78	35.40	355	174	Peak	HORIZONTAL
2	7238.52	44.53	54.00	-9.47	40.49	3.66	35.78	35.40	355	174	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor				
						dB	dB/m	dB	deg	cm		
1	7233.64	68.28	74.00	-5.72	64.24	3.66	35.78	35.40	281	173	Peak	VERTICAL
2	7235.72	53.41	54.00	-0.59	49.37	3.66	35.78	35.40	281	173	Average	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 6 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	7305.50	53.23	74.00	-20.77	49.04	3.67	35.92	35.40	229	100 Peak	HORIZONTAL
2	7306.10	37.93	54.00	-16.07	33.74	3.67	35.92	35.40	229	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	7311.10	52.66	54.00	-1.34	48.42	3.68	35.96	35.40	273	169 Average	VERTICAL
2	7313.90	67.94	74.00	-6.06	63.70	3.68	35.96	35.40	273	169 Peak	VERTICAL

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	7384.20	60.14	74.00	-13.86	55.76	3.69	36.09	35.40	289	137	Peak	HORIZONTAL
2	7385.20	44.01	54.00	-9.99	39.63	3.69	36.09	35.40	289	137	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	7384.30	68.86	74.00	-5.14	64.48	3.69	36.09	35.40	280	155	Peak	VERTICAL
2	7385.30	51.73	54.00	-2.27	47.35	3.69	36.09	35.40	280	155	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Mode 4 (Ant. 4)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.60	70.53	74.00	-3.47	40.60	1.76	28.17	0.00	169	106 Peak	VERTICAL
2	2390.00	53.27	54.00	-0.73	23.34	1.76	28.17	0.00	169	106 Average	VERTICAL
3	2427.60	105.57	74.00			1.77	28.25	0.00	169	106 Peak	VERTICAL
4	2433.60	93.37	54.00			1.78	28.25	0.00	169	106 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.20	70.91	74.00	-3.09	40.98	1.76	28.17	0.00	24	100 Peak	VERTICAL
2	2390.00	53.80	54.00	-0.20	23.87	1.76	28.17	0.00	24	100 Average	VERTICAL
3	2420.60	107.98	74.00			1.77	28.25	0.00	24	100 Peak	VERTICAL
4	2423.40	95.87	54.00			1.77	28.25	0.00	24	100 Average	VERTICAL
5	2483.50	49.23	54.00	-4.77	19.05	1.81	28.37	0.00	24	100 Average	VERTICAL
6	2485.50	66.92	74.00	-7.08	36.70	1.81	28.41	0.00	24	100 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2436.00	93.42	54.00			1.78	28.29	0.00	167	100 Average	VERTICAL
2	2438.00	106.01	74.00			1.78	28.29	0.00	167	100 Peak	VERTICAL
3	2483.50	53.52	54.00	-0.48	23.34	1.81	28.37	0.00	167	100 Average	VERTICAL
4	2483.50	71.36	74.00	-2.64	41.18	1.81	28.37	0.00	167	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2386.20	53.43	54.00	-0.57	23.50	1.76	28.17	0.00	60	100	Average	VERTICAL
2	2386.20	59.84	74.00	-14.16	29.91	1.76	28.17	0.00	60	100	Peak	VERTICAL
3	2414.60	104.95	54.00			1.77	28.21	0.00	60	100	Average	VERTICAL
4	2415.60	108.28	74.00			1.77	28.21	0.00	60	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.00	46.71	54.00	-7.29	16.78	1.76	28.17	0.00	311	100	Average	VERTICAL
2	2389.40	57.86	74.00	-16.14	27.93	1.76	28.17	0.00	311	100	Peak	VERTICAL
3	2437.80	107.31	54.00			1.78	28.29	0.00	311	100	Average	VERTICAL
4	2438.20	111.61	74.00			1.78	28.29	0.00	311	100	Peak	VERTICAL
5	2484.10	56.12	74.00	-17.88	25.94	1.81	28.37	0.00	311	100	Peak	VERTICAL
6	2484.30	45.51	54.00	-8.49	15.33	1.81	28.37	0.00	311	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2459.40	106.43	54.00			1.80	28.33	0.00	167	100	Average	VERTICAL
2	2460.60	109.89	74.00			1.80	28.33	0.00	167	100	Peak	VERTICAL
3	2487.70	52.01	54.00	-1.99	21.79	1.81	28.41	0.00	167	100	Average	VERTICAL
4	2487.70	60.16	74.00	-13.84	29.94	1.81	28.41	0.00	167	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Mode 4 (Ant. 4)
Test Date	May 20, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.00	67.83	74.00	-6.17	37.90	1.76	28.17	0.00	171	108	Peak	VERTICAL
2	2390.00	53.77	54.00	-0.23	23.84	1.76	28.17	0.00	171	108	Average	VERTICAL
3	2405.60	112.03	74.00			1.77	28.21	0.00	171	108	Peak	VERTICAL
4	2405.80	101.75	54.00			1.77	28.21	0.00	171	108	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.20	67.39	74.00	-6.61	37.46	1.76	28.17	0.00	169	110	Peak	VERTICAL
2	2389.60	53.45	54.00	-0.55	23.52	1.76	28.17	0.00	169	110	Average	VERTICAL
3	2430.20	108.63	54.00			1.78	28.25	0.00	169	110	Average	VERTICAL
4	2435.00	118.26	74.00			1.78	28.29	0.00	169	110	Peak	VERTICAL
5	2484.10	50.26	54.00	-3.74	20.08	1.81	28.37	0.00	169	110	Average	VERTICAL
6	2484.50	63.41	74.00	-10.59	33.23	1.81	28.37	0.00	169	110	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2467.60	112.98	74.00			1.80	28.33	0.00	169	100	Peak	VERTICAL
2	2468.20	101.75	54.00			1.80	28.37	0.00	169	100	Average	VERTICAL
3	2483.50	53.28	54.00	-0.72	23.10	1.81	28.37	0.00	169	100	Average	VERTICAL
4	2484.30	67.95	74.00	-6.05	37.77	1.81	28.37	0.00	169	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 5 (Ant. 5)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.60	72.21	74.00	-1.79	42.28	1.76	28.17	0.00	366	100	Peak	VERTICAL
2	2390.00	53.70	54.00	-0.30	23.77	1.76	28.17	0.00	366	100	Average	VERTICAL
3	2408.00	106.70	74.00			1.77	28.21	0.00	366	100	Peak	VERTICAL
4	2409.20	94.17	54.00			1.77	28.21	0.00	366	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.80	69.76	74.00	-4.24	39.83	1.76	28.17	0.00	10	100	Peak	VERTICAL
2	2390.00	53.57	54.00	-0.43	23.64	1.76	28.17	0.00	10	100	Average	VERTICAL
3	2423.40	98.30	54.00			1.77	28.25	0.00	10	100	Average	VERTICAL
4	2427.00	110.81	74.00			1.77	28.25	0.00	10	100	Peak	VERTICAL
5	2483.50	50.50	54.00	-3.50	20.32	1.81	28.37	0.00	10	100	Average	VERTICAL
6	2484.70	67.79	74.00	-6.21	37.61	1.81	28.37	0.00	10	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2440.00	95.07	54.00			1.78	28.29	0.00	4	100	Average	VERTICAL
2	2443.60	107.61	74.00			1.78	28.29	0.00	4	100	Peak	VERTICAL
3	2483.50	53.59	54.00	-0.41	23.41	1.81	28.37	0.00	4	100	Average	VERTICAL
4	2483.50	72.33	74.00	-1.67	42.15	1.81	28.37	0.00	4	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2384.00	55.84	74.00	-18.16	25.91	1.76	28.17	0.00	360	100	Peak	VERTICAL
2	2386.80	45.42	54.00	-8.58	15.49	1.76	28.17	0.00	360	100	Average	VERTICAL
3	2412.80	102.93	54.00			1.77	28.21	0.00	360	100	Average	VERTICAL
4	2413.00	106.99	74.00			1.77	28.21	0.00	360	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.80	44.78	54.00	-9.22	14.85	1.76	28.17	0.00	3	100	Average	VERTICAL
2	2388.80	56.05	74.00	-17.95	26.12	1.76	28.17	0.00	3	100	Peak	VERTICAL
3	2433.80	108.01	54.00			1.78	28.25	0.00	3	100	Average	VERTICAL
4	2439.60	111.81	74.00			1.78	28.29	0.00	3	100	Peak	VERTICAL
5	2483.50	55.26	74.00	-18.74	25.08	1.81	28.37	0.00	3	100	Peak	VERTICAL
6	2485.30	44.63	54.00	-9.37	14.41	1.81	28.41	0.00	3	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2461.00	108.07	74.00			1.80	28.33	0.00	0	100	Peak	VERTICAL
2	2461.20	104.02	54.00			1.80	28.33	0.00	0	100	Average	VERTICAL
3	2487.30	55.62	74.00	-18.38	25.40	1.81	28.41	0.00	0	100	Peak	VERTICAL
4	2487.90	46.85	54.00	-7.15	16.63	1.81	28.41	0.00	0	100	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Mode 5 (Ant. 5)
Test Date	May 24, 2010		

Channel1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2390.00	53.72	54.00	-0.28	23.79	1.76	28.17	0.00	0	100 Average	VERTICAL
2	2390.00	67.15	74.00	-6.85	37.22	1.76	28.17	0.00	0	100 Peak	VERTICAL
3	2405.80	102.76	54.00			1.77	28.21	0.00	0	100 Average	VERTICAL
4	2405.80	113.46	74.00			1.77	28.21	0.00	0	100 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.20	53.49	54.00	-0.51	23.56	1.76	28.17	0.00	3	100 Average	VERTICAL
2	2389.40	68.26	74.00	-5.74	38.33	1.76	28.17	0.00	3	100 Peak	VERTICAL
3	2430.80	117.87	74.00			1.78	28.25	0.00	3	100 Peak	VERTICAL
4	2440.80	107.06	54.00			1.78	28.29	0.00	3	100 Average	VERTICAL
5	2483.50	50.22	54.00	-3.78	20.04	1.81	28.37	0.00	3	100 Average	VERTICAL
6	2484.50	63.29	74.00	-10.71	33.11	1.81	28.37	0.00	3	100 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2456.00	114.10	74.00			1.80	28.33	0.00	3	100 Peak	VERTICAL
2	2460.80	102.89	54.00			1.80	28.33	0.00	3	100 Average	VERTICAL
3	2483.50	53.85	54.00	-0.15	23.67	1.81	28.37	0.00	3	100 Average	VERTICAL
4	2483.50	70.48	74.00	-3.52	40.30	1.81	28.37	0.00	3	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 6 (Ant. 6)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.04	70.04	74.00	-3.96	40.11	1.76	28.17	0.00	13	133	Peak	VERTICAL
2	2390.00	53.25	54.00	-0.75	23.32	1.76	28.17	0.00	13	133	Average	VERTICAL
3	2407.58	105.81	74.00			1.77	28.21	0.00	13	133	Peak	VERTICAL
4	2413.35	94.22	54.00			1.77	28.21	0.00	13	133	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2384.87	68.13	74.00	-5.87	38.20	1.76	28.17	0.00	347	127	Peak	VERTICAL
2	2390.00	53.84	54.00	-0.16	23.91	1.76	28.17	0.00	347	127	Average	VERTICAL
3	2420.33	96.11	54.00			1.77	28.25	0.00	347	127	Average	VERTICAL
4	2422.58	108.31	74.00			1.77	28.25	0.00	347	127	Peak	VERTICAL
5	2483.50	52.79	54.00	-1.21	22.61	1.81	28.37	0.00	347	127	Average	VERTICAL
6	2484.78	68.69	74.00	-5.31	38.51	1.81	28.37	0.00	347	127	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2436.94	105.01	74.00			1.78	28.29	0.00	335	129	Peak	VERTICAL
2	2450.08	92.71	54.00			1.78	28.29	0.00	335	129	Average	VERTICAL
3	2483.50	53.57	54.00	-0.43	23.39	1.81	28.37	0.00	335	129	Average	VERTICAL
4	2484.14	69.93	74.00	-4.07	39.75	1.81	28.37	0.00	335	129	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2385.51	53.23	54.00	-0.77	23.30	1.76	28.17	0.00	351	131	Average	VERTICAL
2	2386.31	61.41	74.00	-12.59	31.48	1.76	28.17	0.00	351	131	Peak	VERTICAL
3	2413.60	110.46	74.00			1.77	28.21	0.00	351	131	Peak	VERTICAL
4	2414.72	107.16	54.00			1.77	28.21	0.00	351	131	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.28	56.01	74.00	-17.99	26.08	1.76	28.17	0.00	25	136	Peak	VERTICAL
2	2390.00	46.20	54.00	-7.80	16.27	1.76	28.17	0.00	25	136	Average	VERTICAL
3	2433.15	110.37	74.00			1.78	28.25	0.00	25	136	Peak	VERTICAL
4	2434.44	107.01	54.00			1.78	28.29	0.00	25	136	Average	VERTICAL
5	2483.50	46.50	54.00	-7.50	16.32	1.81	28.37	0.00	25	136	Average	VERTICAL
6	2484.14	57.59	74.00	-16.41	27.41	1.81	28.37	0.00	25	136	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.12	112.41	74.00			1.80	28.33	0.00	343	135	Peak	VERTICAL
2	2464.72	108.40	54.00			1.80	28.33	0.00	343	135	Average	VERTICAL
3	2487.67	52.00	54.00	-2.00	21.78	1.81	28.41	0.00	343	135	Average	VERTICAL
4	2488.15	61.02	74.00	-12.98	30.80	1.81	28.41	0.00	343	135	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Mode 6 (Ant. 6)
Test Date	May 25, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.36	67.83	74.00	-6.17	37.90	1.76	28.17	0.00	339	141	Peak	VERTICAL
2	2390.00	53.76	54.00	-0.24	23.83	1.76	28.17	0.00	339	141	Average	VERTICAL
3	2405.59	100.37	54.00			1.77	28.21	0.00	339	141	Average	VERTICAL
4	2408.31	111.63	74.00			1.77	28.21	0.00	339	141	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.52	65.51	74.00	-8.49	35.58	1.76	28.17	0.00	11	137	Peak	VERTICAL
2	2390.00	52.59	54.00	-1.41	22.66	1.76	28.17	0.00	11	137	Average	VERTICAL
3	2431.39	117.61	74.00			1.78	28.25	0.00	11	137	Peak	VERTICAL
4	2433.96	107.08	54.00			1.78	28.25	0.00	11	137	Average	VERTICAL
5	2483.50	51.18	54.00	-2.82	21.00	1.81	28.37	0.00	11	137	Average	VERTICAL
6	2484.94	64.30	74.00	-9.70	34.12	1.81	28.37	0.00	11	137	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.76	111.87	74.00			1.80	28.33	0.00	338	137	Peak	VERTICAL
2	2466.17	101.54	54.00			1.80	28.33	0.00	338	137	Average	VERTICAL
3	2483.50	53.77	54.00	-0.23	23.59	1.81	28.37	0.00	338	137	Average	VERTICAL
4	2483.66	69.93	74.00	-4.07	39.75	1.81	28.37	0.00	338	137	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Mode 7 (Ant. 7)>:

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	2389.20	72.60	74.00	-1.40	42.67	1.76	28.17	0.00	332	149	Peak	VERTICAL
2	2390.00	53.62	54.00	-0.38	23.69	1.76	28.17	0.00	332	149	Average	VERTICAL
3	2410.80	104.27	74.00			1.77	28.21	0.00	332	149	Peak	VERTICAL
4	2419.20	91.93	54.00			1.77	28.25	0.00	332	149	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	2389.60	53.14	54.00	-0.86	23.21	1.76	28.17	0.00	332	150	Average	VERTICAL
2	2390.00	69.17	74.00	-4.83	39.24	1.76	28.17	0.00	332	150	Peak	VERTICAL
3	2420.60	94.29	54.00			1.77	28.25	0.00	332	150	Average	VERTICAL
4	2422.60	106.58	74.00			1.77	28.25	0.00	332	150	Peak	VERTICAL
5	2483.50	50.83	54.00	-3.17	20.65	1.81	28.37	0.00	332	150	Average	VERTICAL
6	2484.30	66.92	74.00	-7.08	36.74	1.81	28.37	0.00	332	150	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	2438.00	105.96	74.00			1.78	28.29	0.00	196	166	Peak	VERTICAL
2	2439.60	93.47	54.00			1.78	28.29	0.00	196	166	Average	VERTICAL
3	2483.90	53.37	54.00	-0.63	23.19	1.81	28.37	0.00	196	166	Average	VERTICAL
4	2483.90	73.83	74.00	-0.17	43.65	1.81	28.37	0.00	196	166	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2384.80	54.61	74.00	-19.39	24.68	1.76	28.17	0.00	106	151	Peak	VERTICAL
2	2385.40	43.47	54.00	-10.53	13.54	1.76	28.17	0.00	106	151	Average	VERTICAL
3	2409.20	99.12	54.00			1.77	28.21	0.00	106	151	Average	VERTICAL
4	2410.60	102.65	74.00			1.77	28.21	0.00	106	151	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.00	43.22	54.00	-10.78	13.29	1.76	28.17	0.00	-1	154	Average	VERTICAL
2	2390.20	54.41	74.00	-19.59	24.48	1.76	28.17	0.00	-1	154	Peak	VERTICAL
3	2434.40	100.40	54.00			1.78	28.29	0.00	-1	154	Average	VERTICAL
4	2435.60	104.64	74.00			1.78	28.29	0.00	-1	154	Peak	VERTICAL
5	2484.50	43.46	54.00	-10.54	13.28	1.81	28.37	0.00	-1	154	Average	VERTICAL
6	2486.50	54.39	74.00	-19.61	24.17	1.81	28.41	0.00	-1	154	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2462.80	95.84	54.00			1.80	28.33	0.00	276	170	Average	VERTICAL
2	2463.00	99.97	74.00			1.80	28.33	0.00	276	170	Peak	VERTICAL
3	2486.50	55.12	74.00	-18.88	24.90	1.81	28.41	0.00	276	170	Peak	VERTICAL
4	2487.30	43.84	54.00	-10.16	13.62	1.81	28.41	0.00	276	170	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	60%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Mode 7 (Ant. 7)
Test Date	May 24, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.80	53.72	54.00	-0.28	23.79	1.76	28.17	0.00	0	151	Average	VERTICAL
2	2389.80	73.53	74.00	-0.47	43.60	1.76	28.17	0.00	0	151	Peak	VERTICAL
3	2418.00	111.51	74.00			1.77	28.25	0.00	0	151	Peak	VERTICAL
4	2419.00	100.05	54.00			1.77	28.25	0.00	0	151	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.00	63.02	74.00	-10.98	33.09	1.76	28.17	0.00	331	148	Peak	VERTICAL
2	2389.00	50.11	54.00	-3.89	20.18	1.76	28.17	0.00	331	148	Average	VERTICAL
3	2432.00	101.14	54.00			1.78	28.25	0.00	331	148	Average	VERTICAL
4	2435.20	112.43	74.00			1.78	28.29	0.00	331	148	Peak	VERTICAL
5	2484.70	46.98	54.00	-7.02	16.80	1.81	28.37	0.00	331	148	Average	VERTICAL
6	2485.10	61.11	74.00	-12.89	30.89	1.81	28.41	0.00	331	148	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2468.00	100.68	54.00			1.80	28.33	0.00	218	175	Average	VERTICAL
2	2468.60	110.86	74.00			1.80	28.37	0.00	218	175	Peak	VERTICAL
3	2483.70	53.31	54.00	-0.69	23.13	1.81	28.37	0.00	218	175	Average	VERTICAL
4	2483.90	72.61	74.00	-1.39	42.43	1.81	28.37	0.00	218	175	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Antenna 1>:

Low Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 1 / 5755 MHz

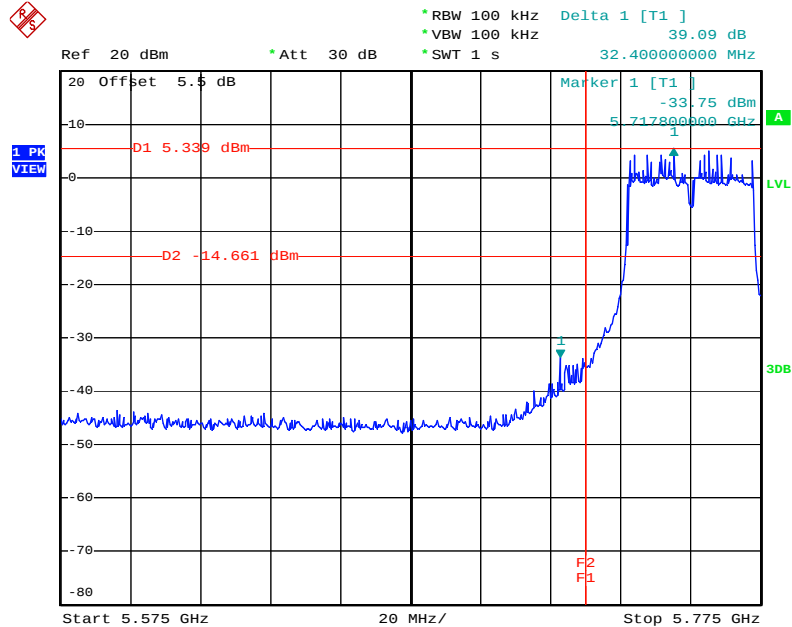


Date: 30.MAY.2010 12:10:54

High Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 1 / 5795 MHz

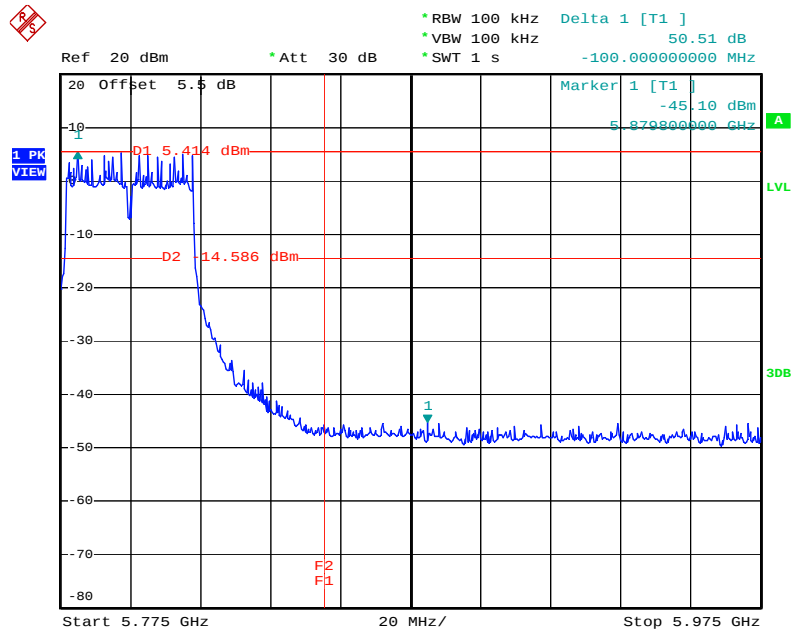


Date: 30.MAY.2010 12:13:13

Low Band Edge Plot on Configuration IEEE 802.11a Ant. 1 / 5745 MHz

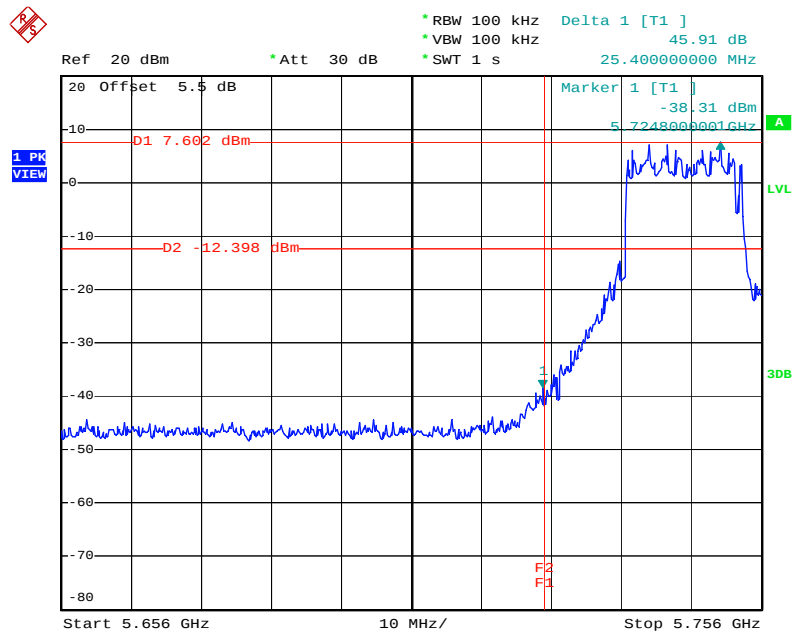

Date: 30.MAY.2010 12:06:03

High Band Edge Plot on Configuration IEEE 802.11a Ant. 1 / 5825 MHz

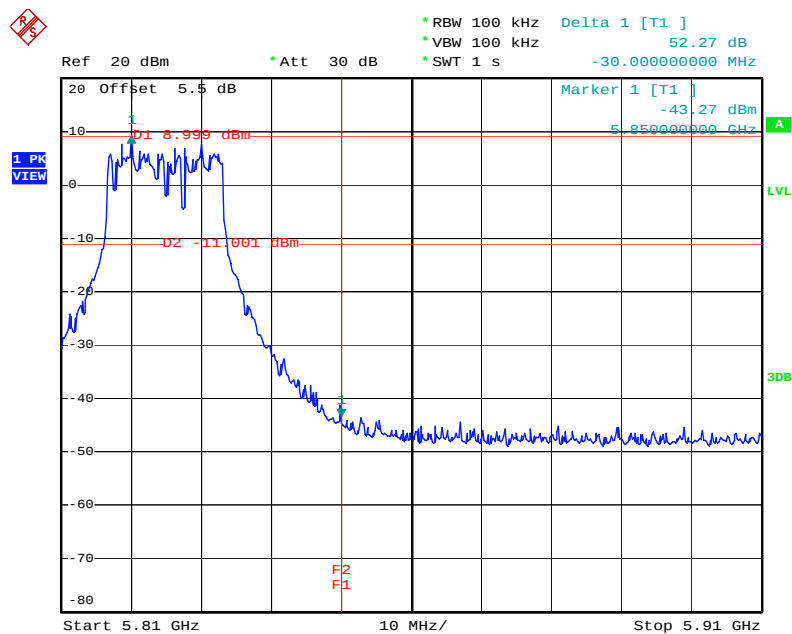


Date: 30.MAY.2010 11:57:36

For Emission not in Restricted Band


<For Antenna 2>:

Low Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2 / 5755 MHz

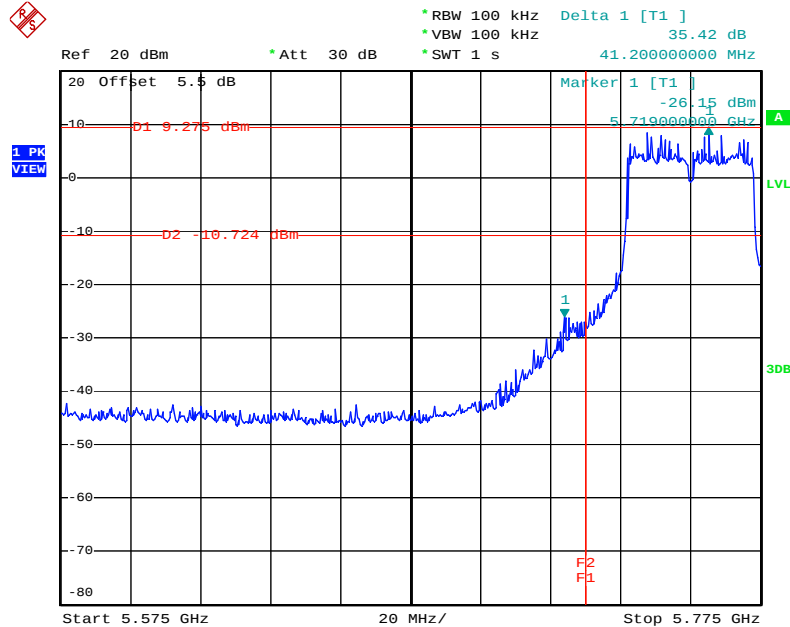


Date: 27.MAY.2010 17:33:24

High Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 2 / 5795 MHz

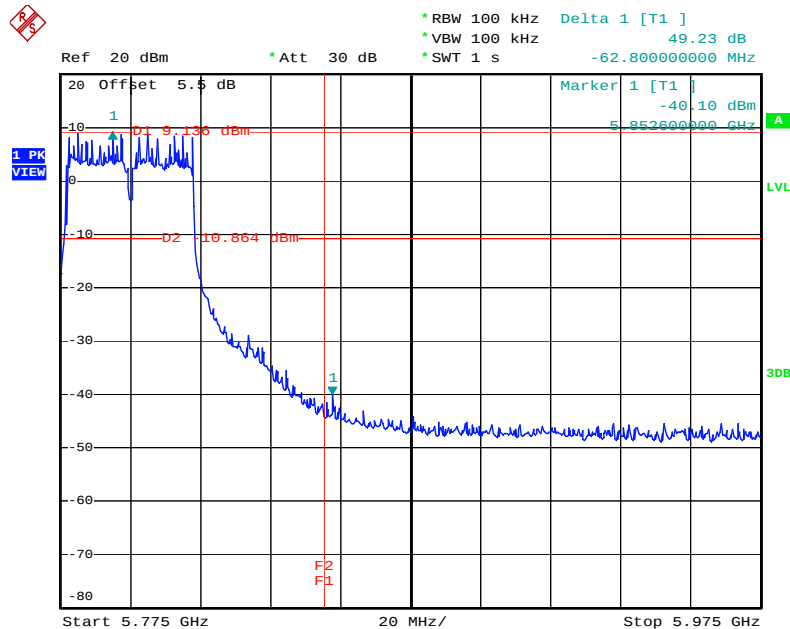


Date: 27.MAY.2010 17:35:38

Low Band Edge Plot on Configuration IEEE 802.11a Ant. 2 / 5745 MHz

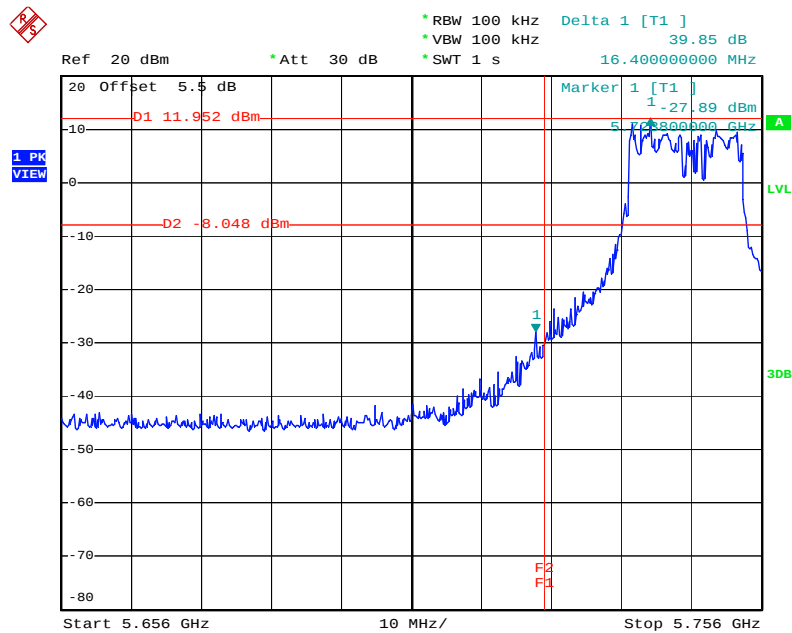

Date: 27.MAY.2010 17:17:48

High Band Edge Plot on Configuration IEEE 802.11a Ant. 2 / 5825 MHz

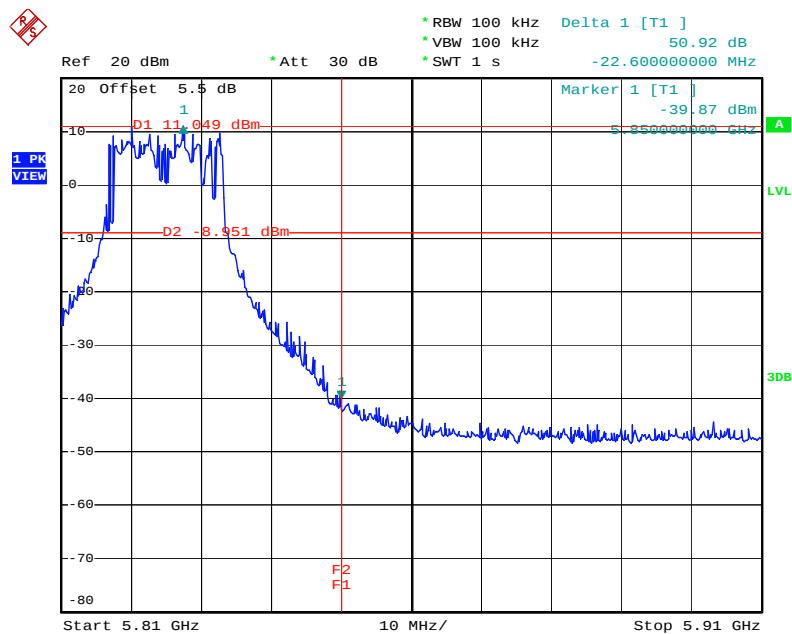


Date: 27.MAY.2010 17:23:42

For Emission not in Restricted Band


<For Antenna 3>:

Low Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 3 / 5755 MHz

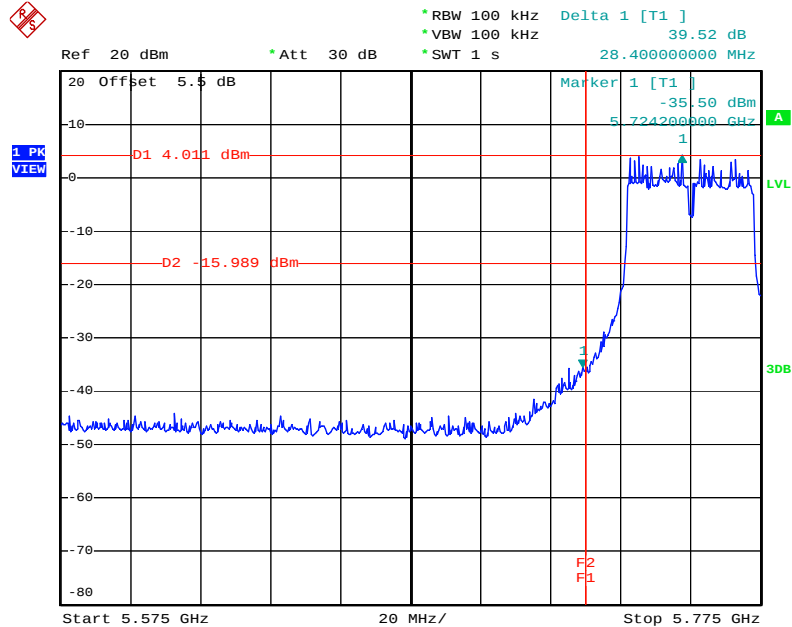


Date: 30.MAY.2010 19:01:41

High Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 3 / 5795 MHz

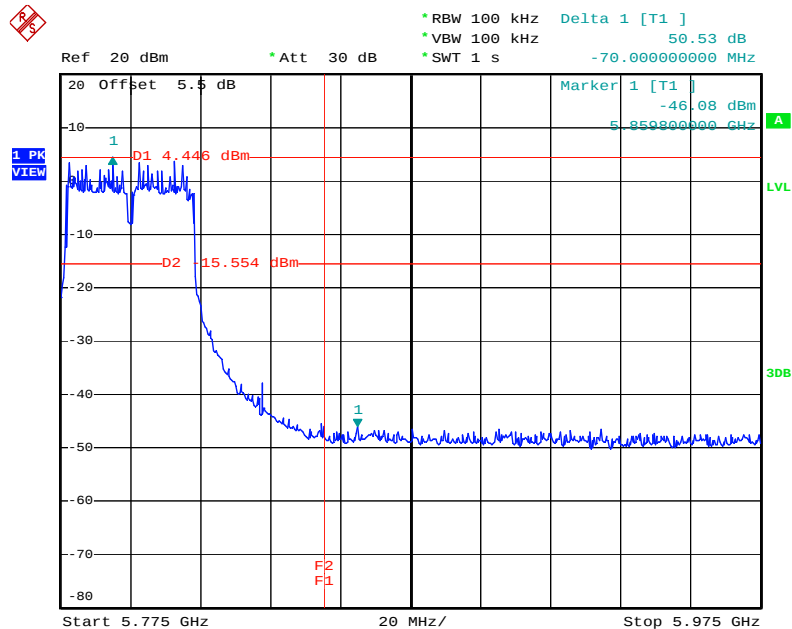


Date: 30.MAY.2010 18:59:35

Low Band Edge Plot on Configuration IEEE 802.11a Ant. 3 / 5745 MHz

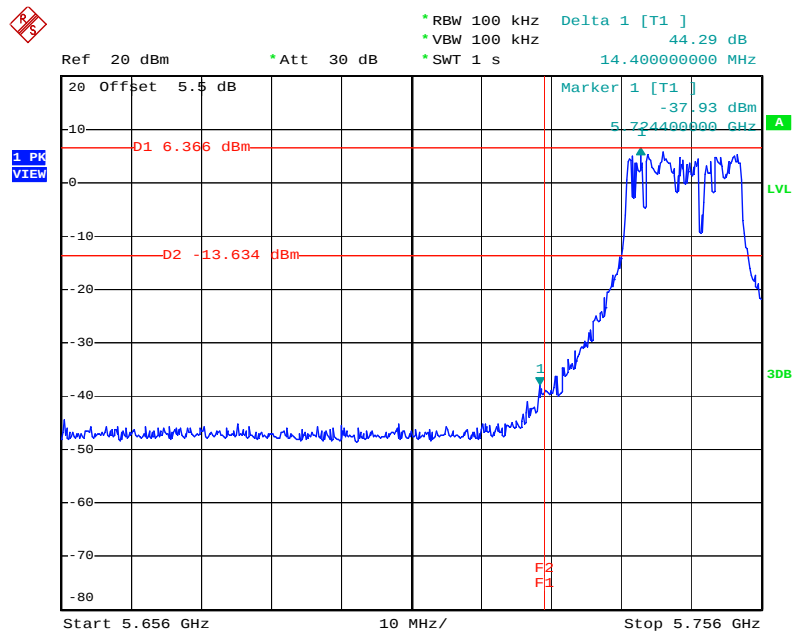

Date: 30.MAY.2010 18:53:01

High Band Edge Plot on Configuration IEEE 802.11a Ant. 3 / 5825 MHz

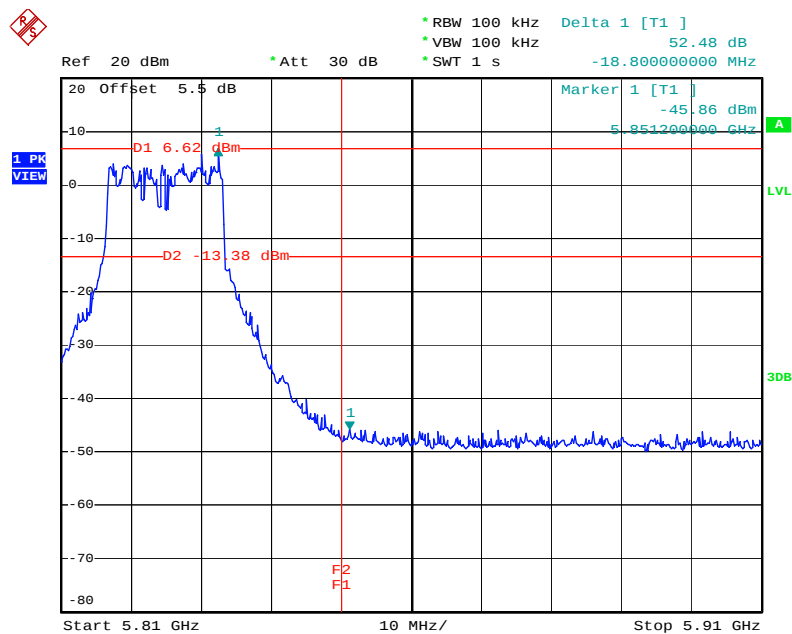


Date: 30.MAY.2010 18:57:09

For Emission not in Restricted Band


<For Antenna 4>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4 / 2422 MHz

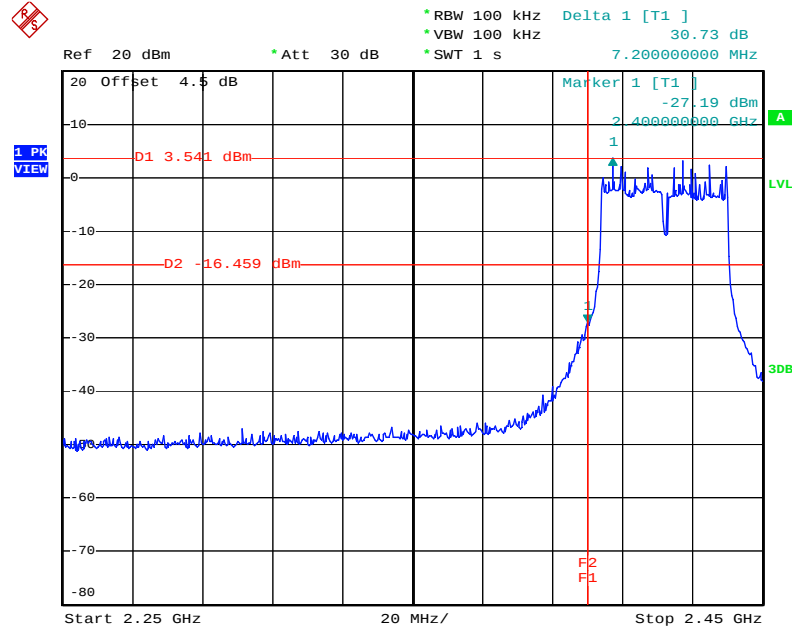


Date: 27.MAY.2010 16:29:45

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 4 / 2452 MHz

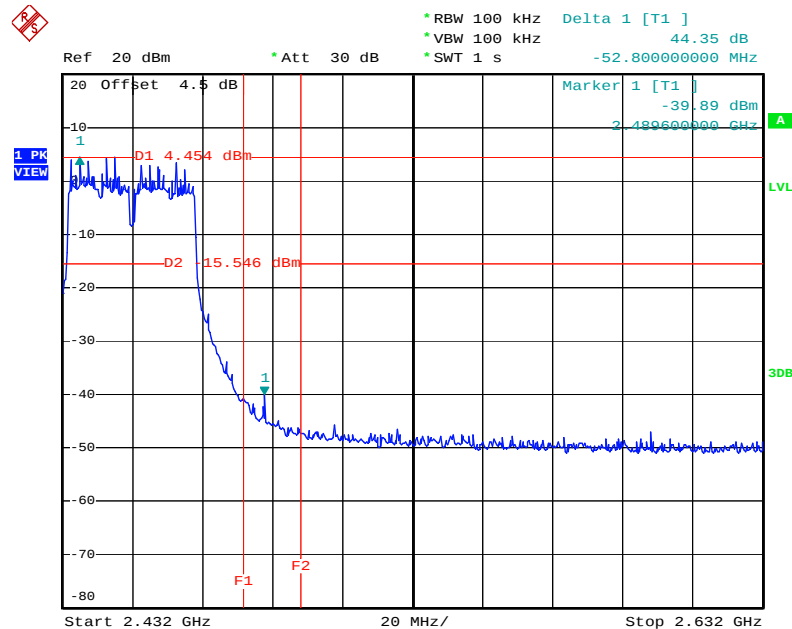


Date: 27.MAY.2010 16:24:49

Low Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4 / 5755 MHz

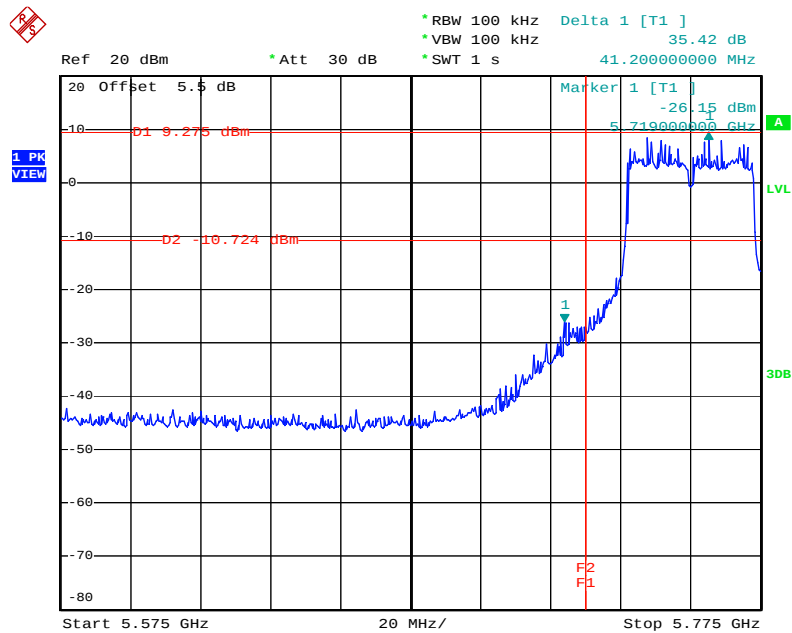


Date: 27.MAY.2010 17:33:24

High Band Edge Plot on Configuration IEEE 802.11an MCS8 40MHz Ant. 4 / 5795 MHz

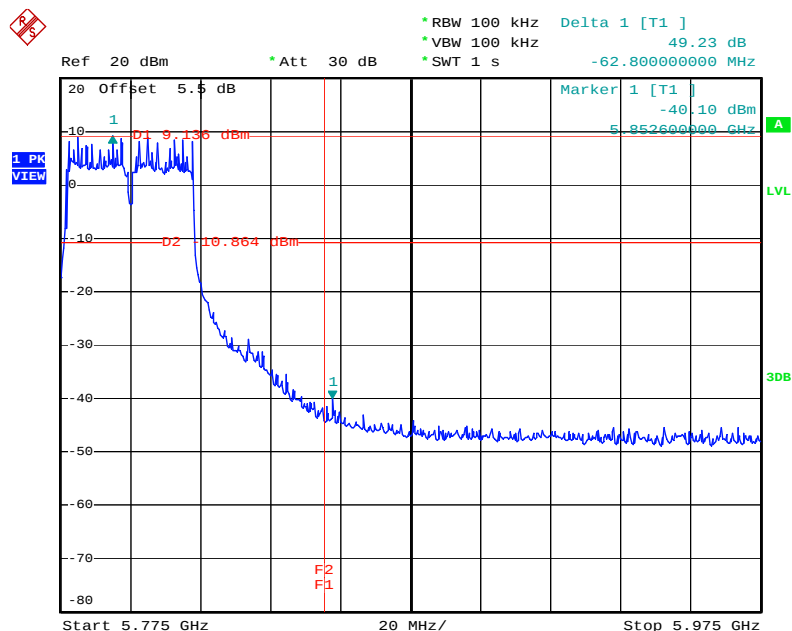


Date: 27.MAY.2010 17:35:38

Low Band Edge Plot on Configuration IEEE 802.11b Ant. 4 / 2412 MHz

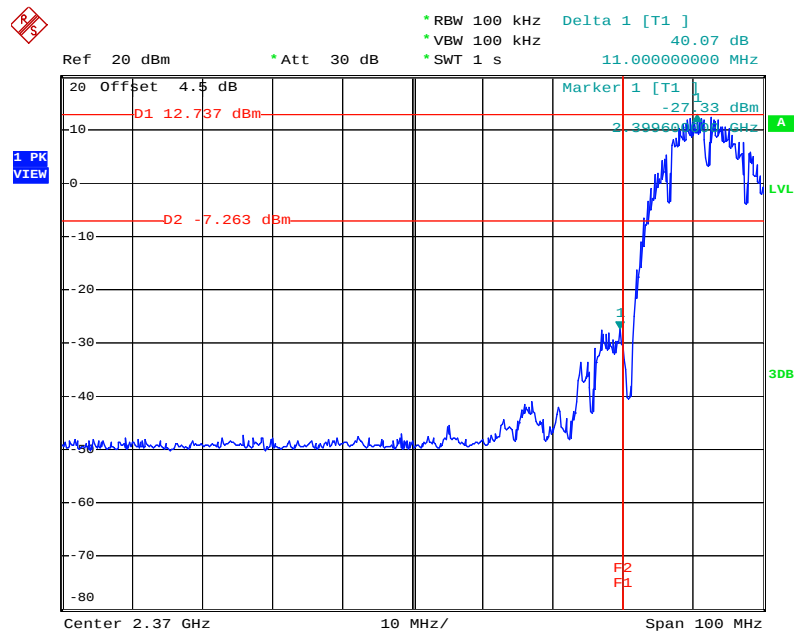


Date: 27.MAY.2010 16:49:21

High Band Edge Plot on Configuration IEEE 802.11b Ant. 4 / 2462 MHz

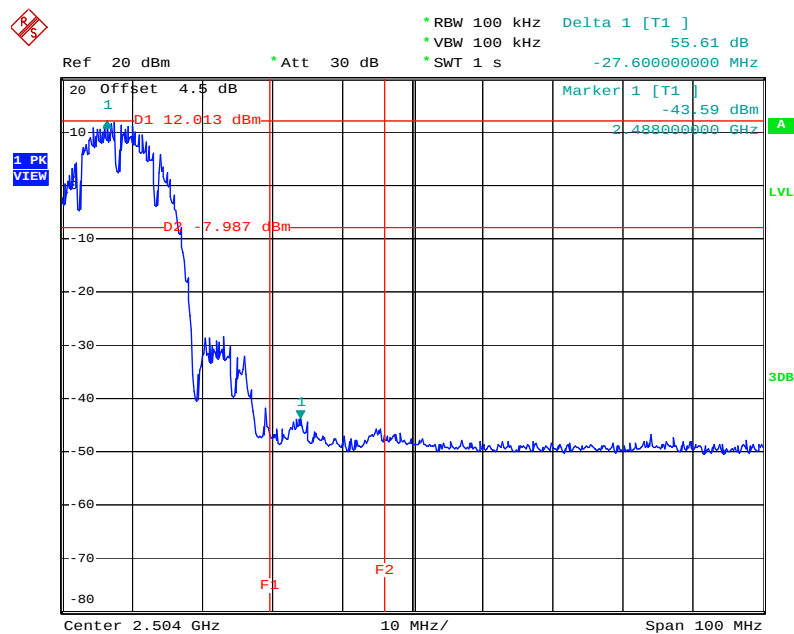


Date: 27.MAY.2010 16:50:43

Low Band Edge Plot on Configuration IEEE 802.11g Ant. 4 / 2412 MHz

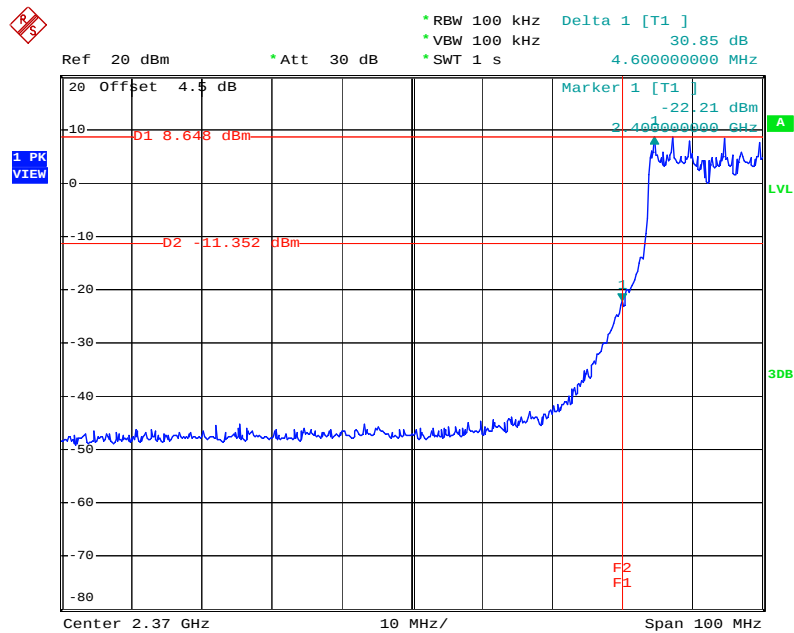


Date: 27.MAY.2010 17:01:19

High Band Edge Plot on Configuration IEEE 802.11g Ant. 4 / 2462 MHz

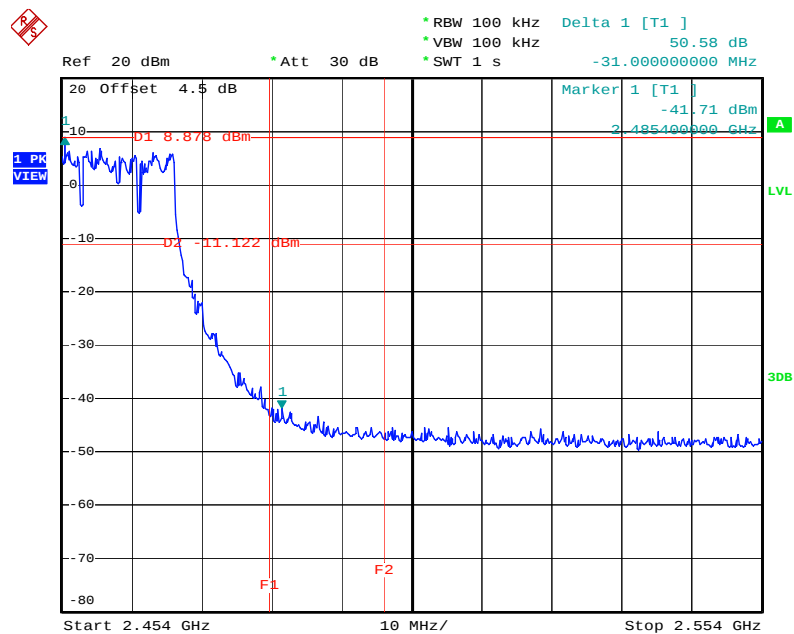


Date: 27.MAY.2010 16:37:35

Low Band Edge Plot on Configuration IEEE 802.11a Ant. 4 / 5745 MHz

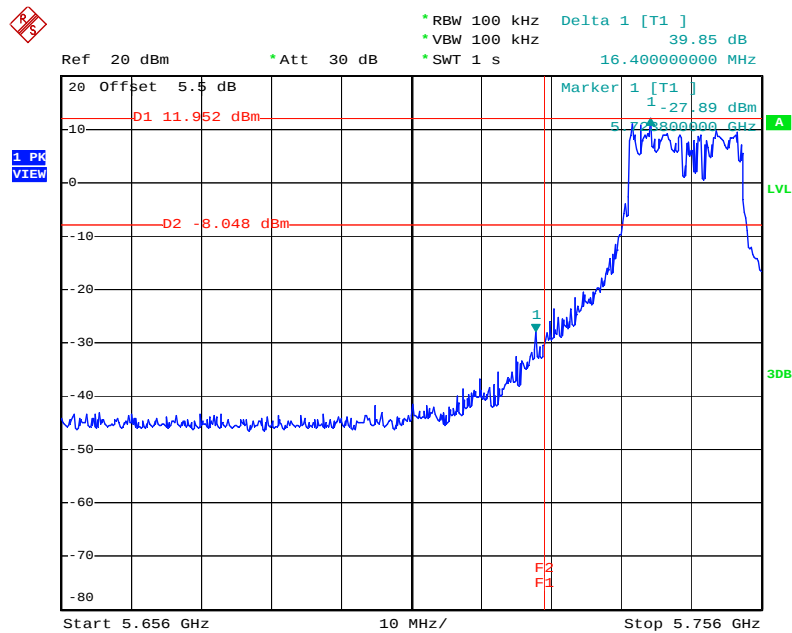

Date: 27.MAY.2010 17:17:48

High Band Edge Plot on Configuration IEEE 802.11a Ant. 4 / 5825 MHz

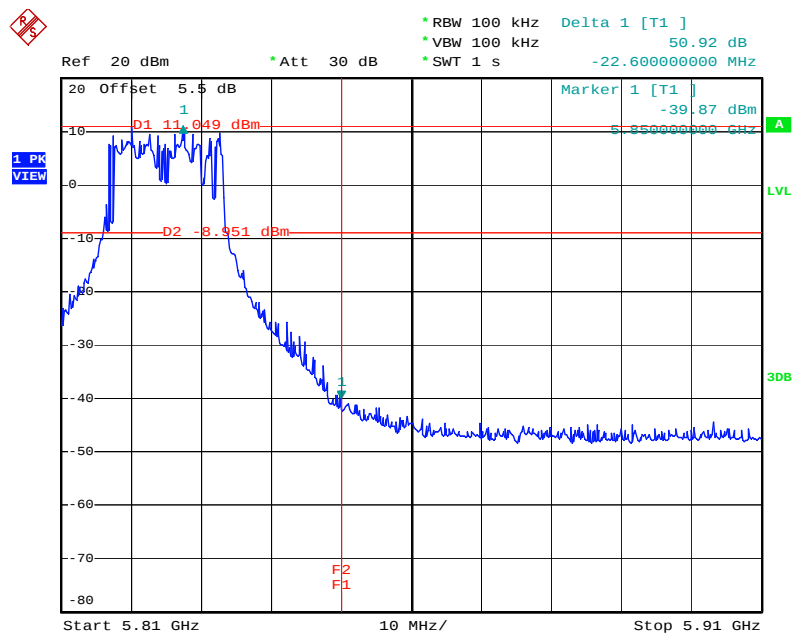


Date: 27.MAY.2010 17:23:42

For Emission not in Restricted Band


<For Antenna 5>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 5 / 2422 MHz

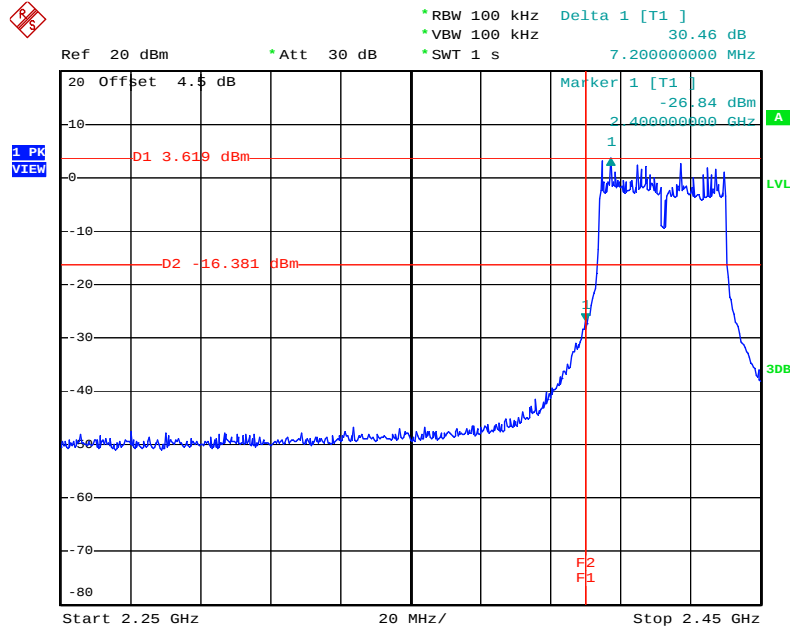


Date: 28.MAY.2010 11:46:26

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 5 / 2452 MHz

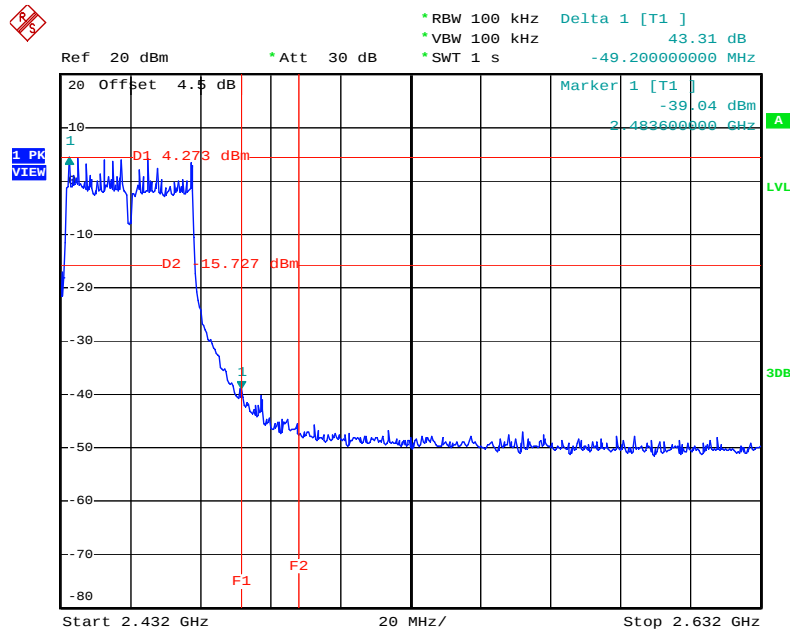


Date: 28.MAY.2010 11:50:57

Low Band Edge Plot on Configuration IEEE 802.11b Ant. 5 / 2412 MHz

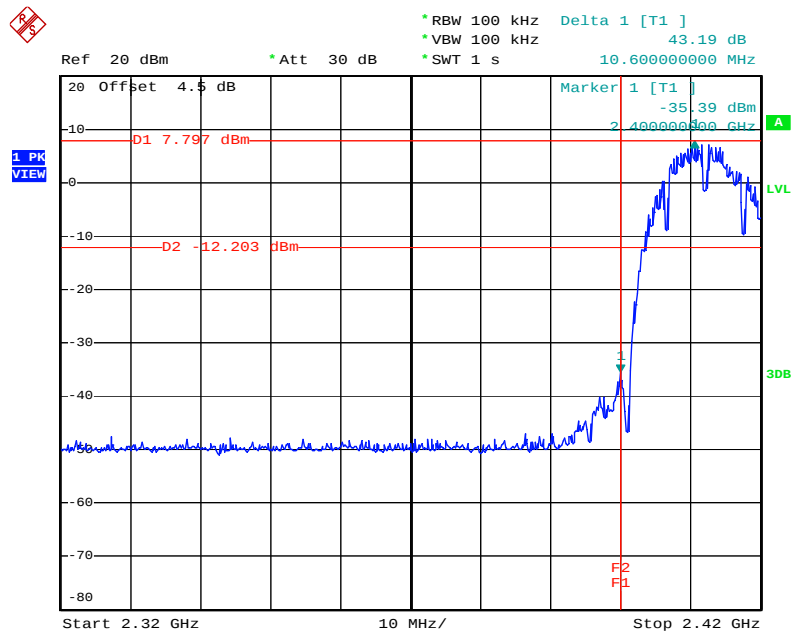


Date: 28.MAY.2010 11:37:00

High Band Edge Plot on Configuration IEEE 802.11b Ant. 5 / 2462 MHz

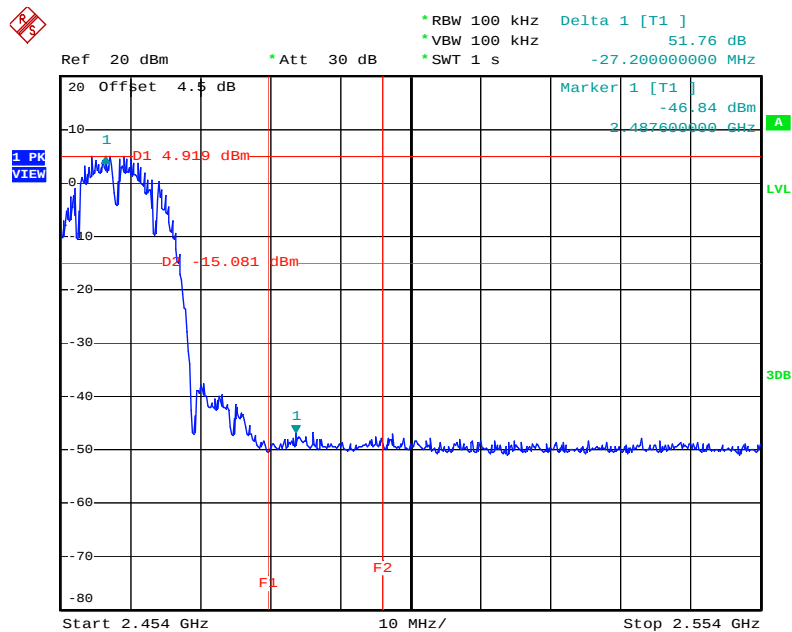


Date: 28.MAY.2010 11:40:32

Low Band Edge Plot on Configuration IEEE 802.11g Ant. 5 / 2412 MHz

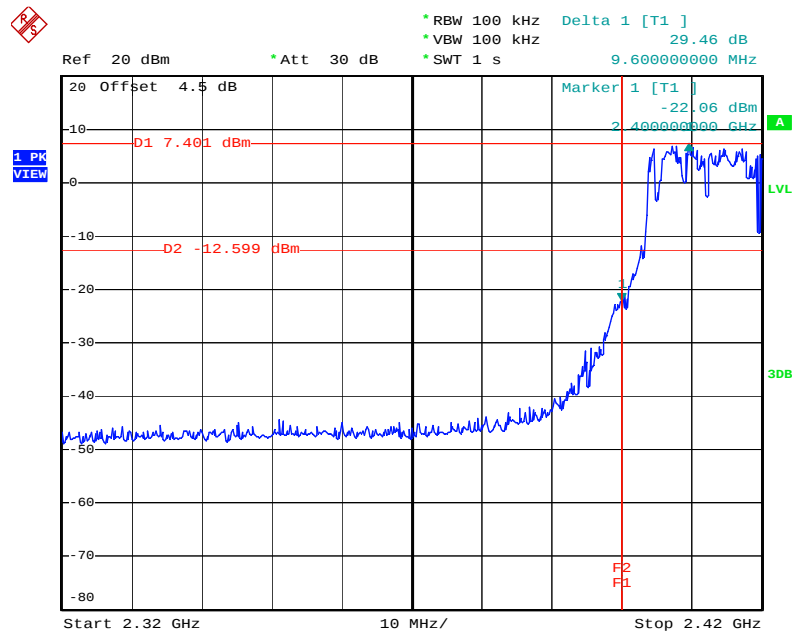

Date: 28.MAY.2010 11:28:28

High Band Edge Plot on Configuration IEEE 802.11g Ant. 5 / 2462 MHz

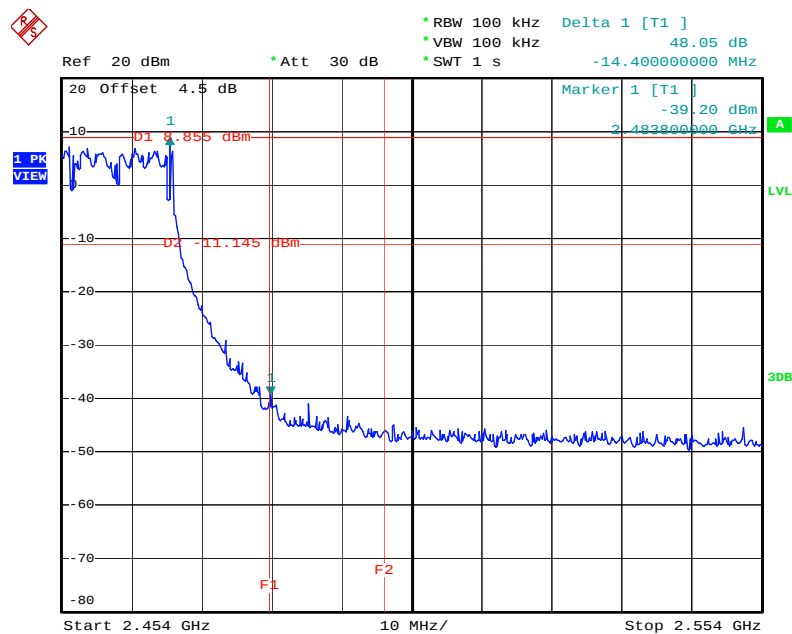


Date: 28.MAY.2010 11:24:01

For Emission not in Restricted Band


<For Antenna 6>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 6 / 2422 MHz

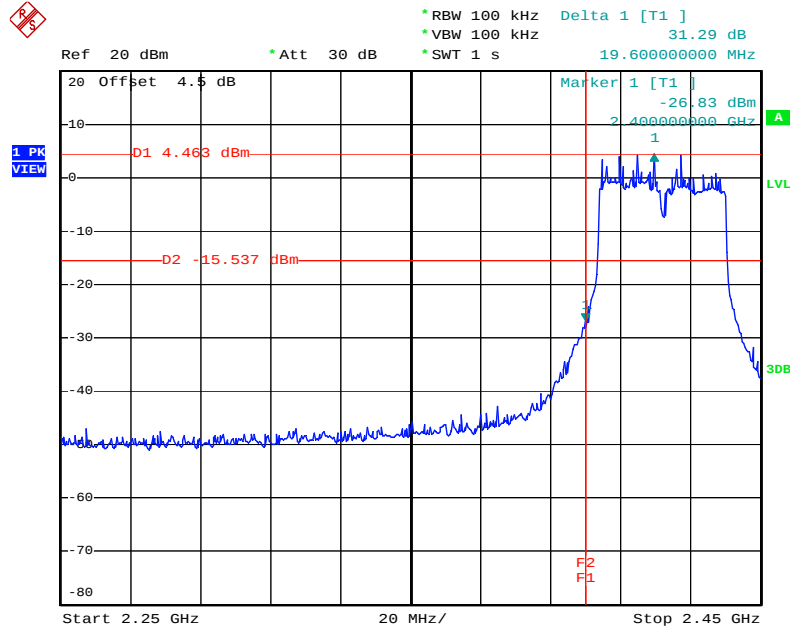


Date: 28.MAY.2010 12:02:00

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 6 / 2452 MHz

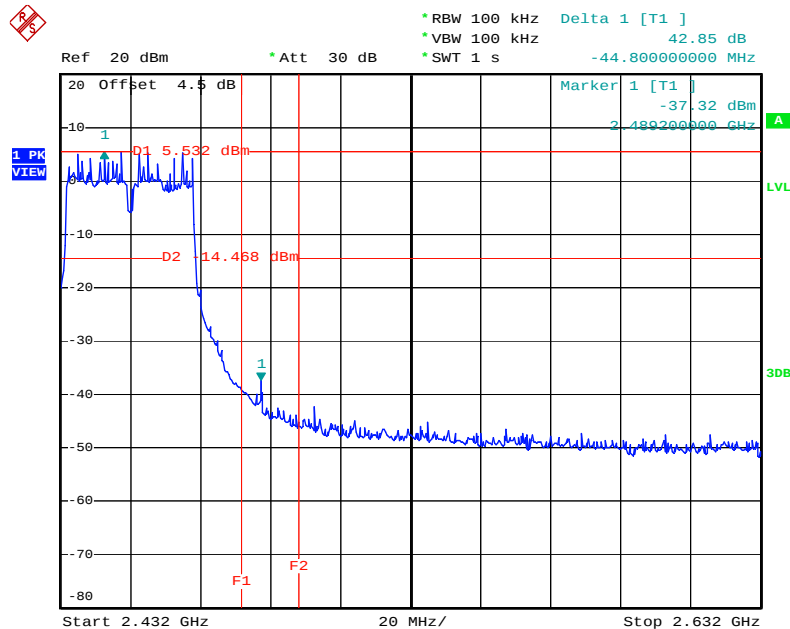


Date: 28.MAY.2010 11:57:59

Low Band Edge Plot on Configuration IEEE 802.11b Ant. 6 / 2412 MHz

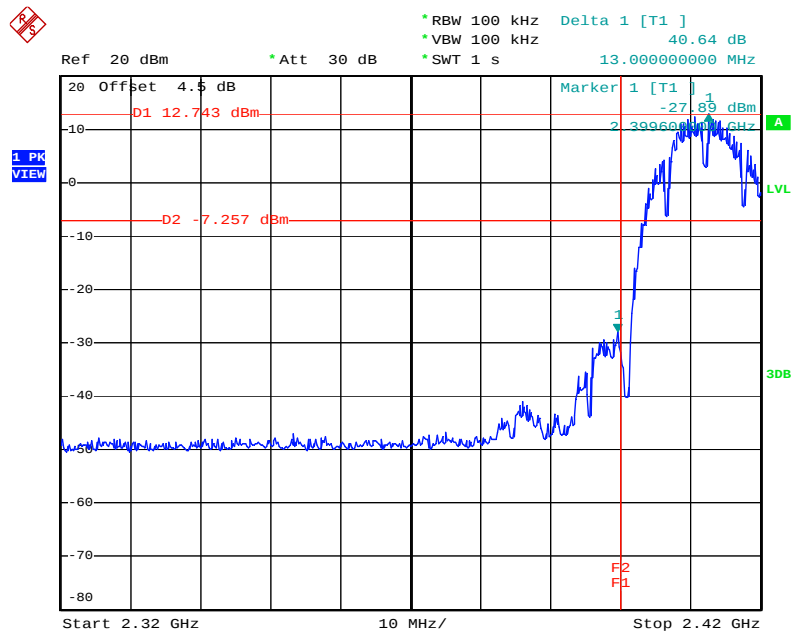


Date: 28.MAY.2010 12:12:21

High Band Edge Plot on Configuration IEEE 802.11b Ant. 6 / 2462 MHz

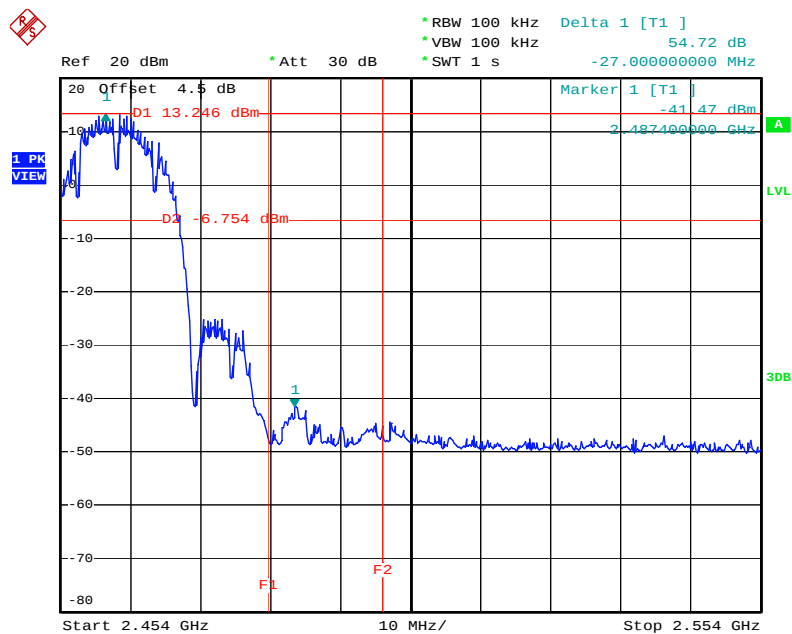


Date: 28.MAY.2010 12:22:04

Low Band Edge Plot on Configuration IEEE 802.11g Ant. 6 / 2412 MHz

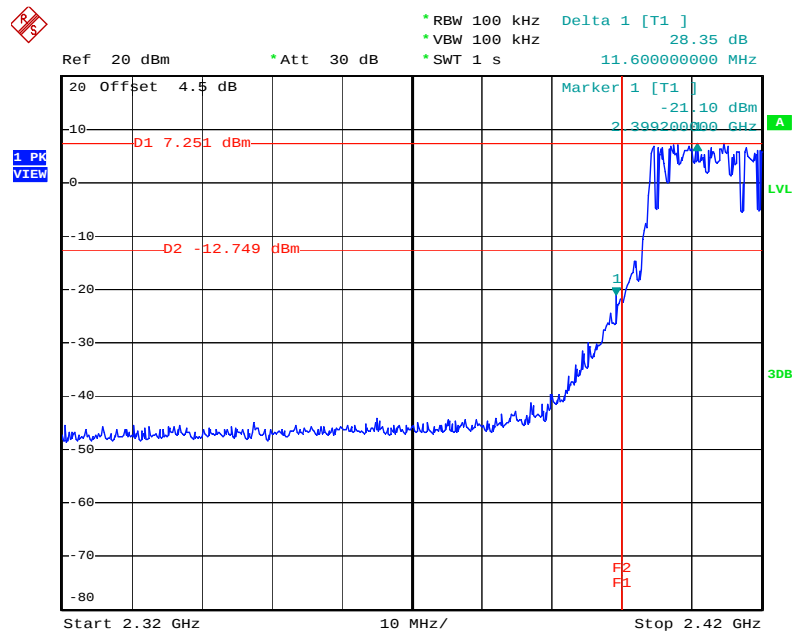

Date: 28.MAY.2010 12:04:12

High Band Edge Plot on Configuration IEEE 802.11g Ant. 6 / 2462 MHz

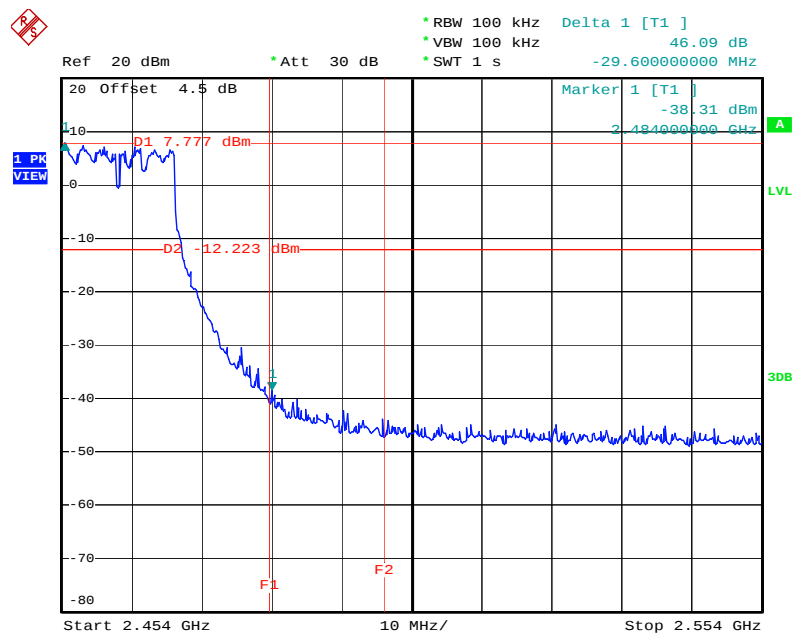


Date: 28.MAY.2010 12:09:11

For Emission not in Restricted Band


<For Antenna 7>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 7 / 2422 MHz

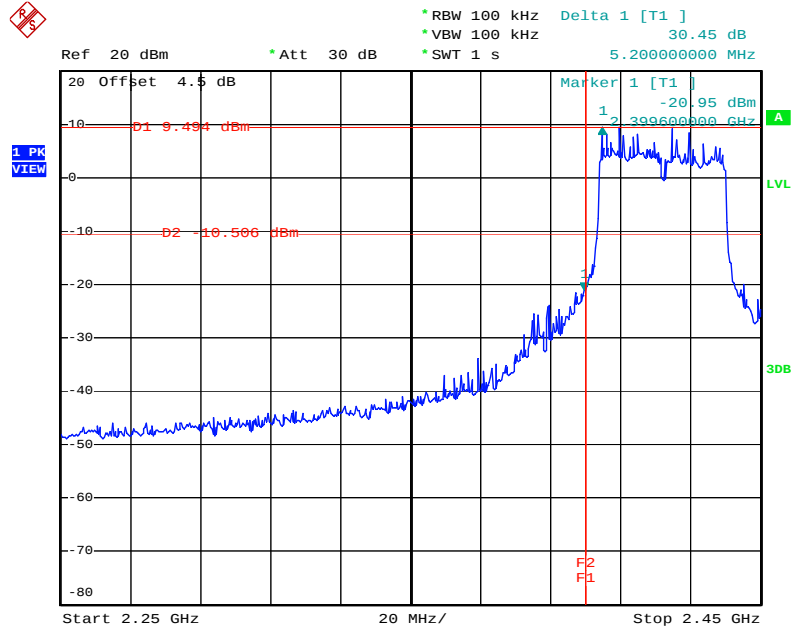


Date: 28.MAY.2010 12:58:58

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz Ant. 7 / 2452 MHz

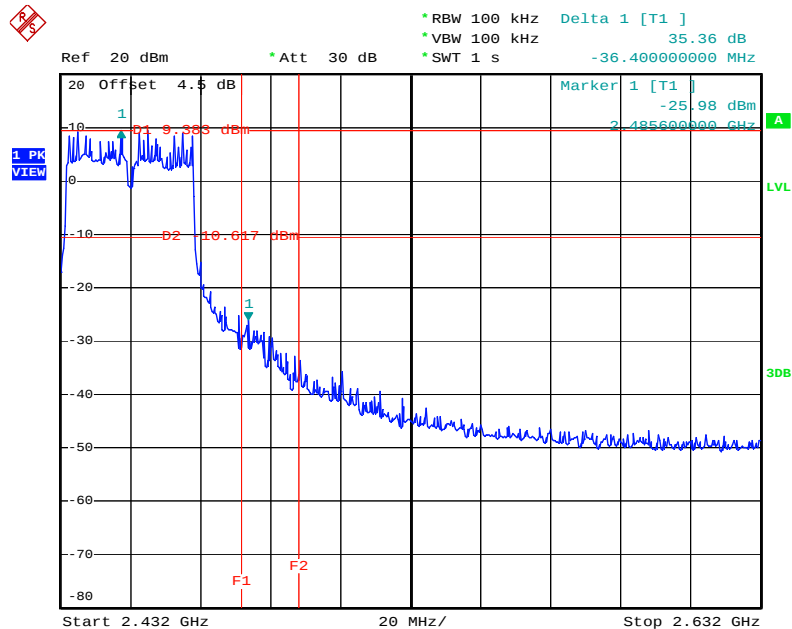


Date: 28.MAY.2010 12:55:08

Low Band Edge Plot on Configuration IEEE 802.11b Ant. 7 / 2412 MHz

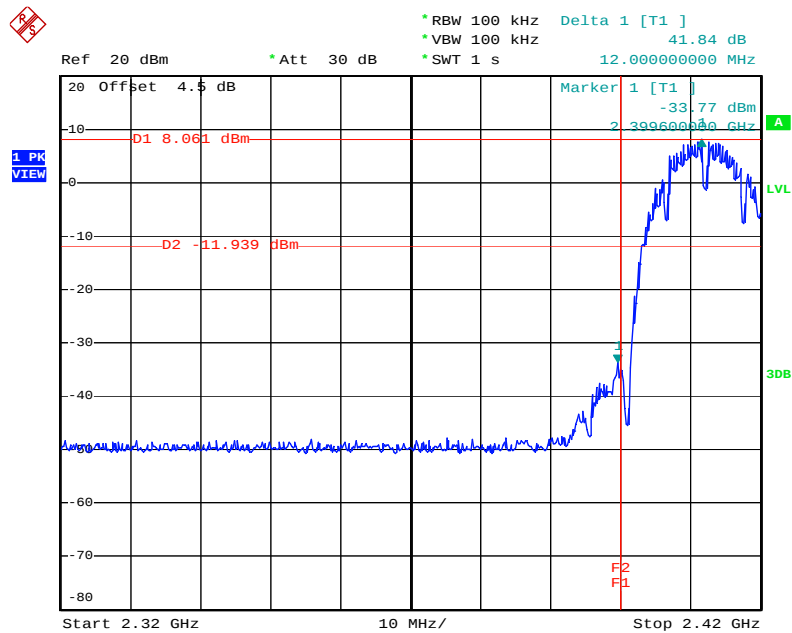


Date: 28.MAY.2010 12:37:26

High Band Edge Plot on Configuration IEEE 802.11b Ant. 7 / 2462 MHz

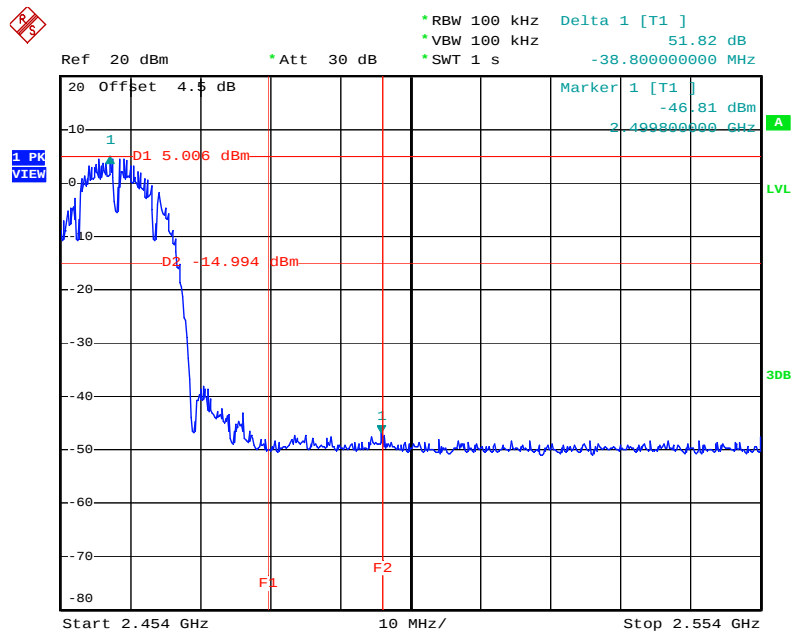


Date: 28.MAY.2010 12:31:42

Low Band Edge Plot on Configuration IEEE 802.11g Ant. 7 / 2412 MHz

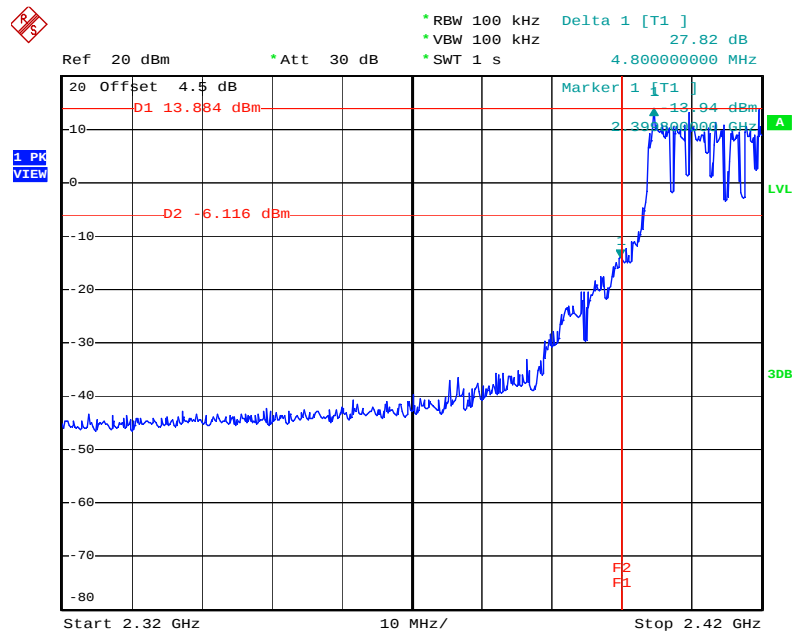

Date: 28.MAY.2010 12:48:55

High Band Edge Plot on Configuration IEEE 802.11g Ant. 7 / 2462 MHz

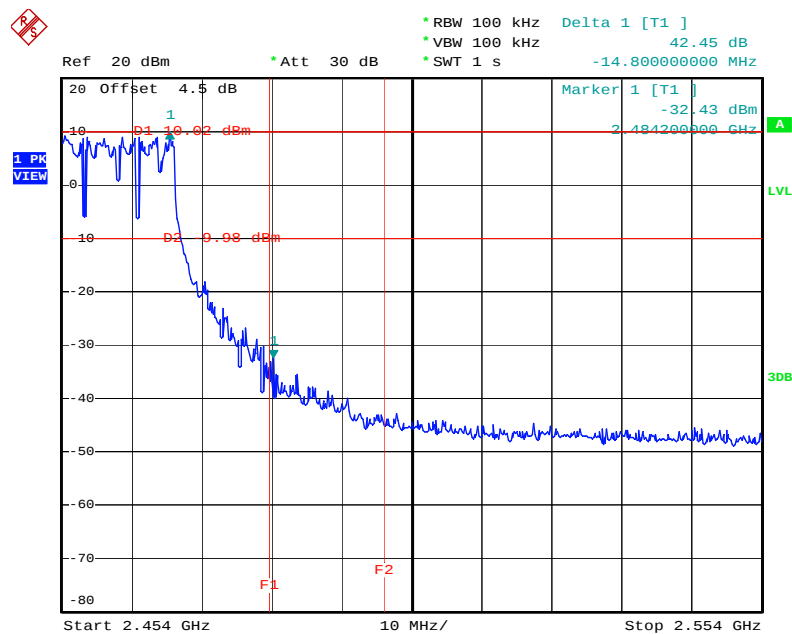

Date: 28.MAY.2010 12:52:50

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 06, 2010	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 23, 2010	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Apr. 29, 2010	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2010	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 10, 2010	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 06, 2009	Radiation (03CH03-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 06, 2010	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Oct. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2010	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: For “*” Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihsu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix